

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-264-RWD-079
Reception No. : 2509002935
Applicant : MPIA CO., LTD.
Address : 203-701, 388 Songnae-daero, Wonmi-gu, Bucheon-si, Gyeonggi-do, South Korea
Manufacturer : MPIA CO., LTD.
Address : 203-701, 388 Songnae-daero, Wonmi-gu, Bucheon-si, Gyeonggi-do, South Korea
Type of Equipment : Repeater
FCC ID. : 2BTDM-MWSR2-900
Model Name : MWSR2-900
Multiple Model Name : N/A
Serial number : N/A
Total page of Report : 22 pages (including this page)
Date of Incoming : March 29, 2026
Date of issue : April 29, 2026

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.209 and Section 15.231**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

This test report is not associated with the accreditation granted by the Korean Laboratory Accreditation Scheme (KOLAS).





Tested by
 Ha-Ram, Lee / Deputy Chief Engineer
 ONETECH Corp.

Reviewed by
 Tae-Ho, Kim / Chief Engineer
 ONETECH Corp.

Approved by
 Jae-Ho, Lee / Director
 ONETECH Corp.

CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY	6
2.6 TEST FACILITY	6
3. GENERAL INFORMATION	7
3.1 PRODUCT DESCRIPTION	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT	7
4. EUT MODIFICATIONS	7
5. SYSTEM TEST CONFIGURATION	8
5.1 JUSTIFICATION	8
5.2 PERIPHERAL EQUIPMENT	8
5.3 MODE OF OPERATION DURING THE TEST	9
5.4 CONFIGURATION OF TEST SYSTEM	10
5.5 ANTENNA REQUIREMENT	10
6. PRELIMINARY TEST	10
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS	10
6.2 GENERAL RADIATED EMISSIONS TESTS	10
7. Bandwidth Measurement	11
7.1 OPERATING ENVIRONMENT	11
7.2 TEST SET-UP	11
7.3 TEST DATE	11
7.4 TEST DATA	12
8. Transmission Time	13
8.1 OPERATING ENVIRONMENT	13
8.2 TEST SET-UP	13
8.3 TEST DATE	13
8.4 TEST DATA	13
9. Radiated Emission Test	14

9.1 REGULATION	14
9.2 TEST SET-UP	14
9.3 TEST DATE	15
9.4 TEST DATA.....	15
9.4.1 Field Strength of Fundamental.....	15
9.4.2 Spurious Emission Test & Restricted Band Test	15
10. CONDUCTED EMISSION TEST.....	19
10.1 OPERATING ENVIRONMENT	19
10.2 TEST SET-UP	19
10.3 TEST DATE	19
10.4 TEST DATA.....	20
11. LIST OF TEST EQUIPMENT	22

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-264-RWD-079	April 29, 2026	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : MPIA CO., LTD.

Address : 203-701, 388 Songnae-daero, Wonmi-gu, Bucheon-si, Gyeonggi-do, South Korea

Contact Person : Jang chanson / Principal research engineer

Telephone No. : +82-32-666-8191

FCC ID : 2BTDM-MWSR2-900

Model Name : MWSR2-900

Brand Name : -

Serial Number : N/A

Date : April 29, 2026

EQUIPMENT CLASS	DSC - Part 15, Security/Remote Control Transmitter
E.U.T. DESCRIPTION	Repeater
THIS REPORT CONCERNS	Original grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2020
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.209 and Section 15.231
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.231(c)	Bandwidth Measurement	Met the Limit / PASS
15.231(a)	Transmission Time	Met the Limit / PASS
15.231(b) 15.209(a)	Field Strength of Fundamental and Spurious Emission	Met the Limit / PASS
15.205	Restricted Band	Met the Limit / PASS
15.207	AC Conducted Emissions	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 2.1.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2020. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The MPIA CO., LTD., Model MWSR2-900 (referred to as the EUT in this report) is a Repeater. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Repeater
Temperature Range	-20 °C ~ +60 °C
OPERATING FREQUENCY	433.92 MHz
MODULATION	FSK
ANTENNA TYPE	Whip Antenna (Reverse type)
ANTENNA GAIN	0.546 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	26 MHz

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	MPIA CO., LTD.	-	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
MWSR2-900	MPIA CO., LTD.	Repeater (EUT)	EUT
DZ012ALL120100K	GUANGDONG KEERDA ELECTRONICS CO.,LTD	Adapter	-

5.3 Mode of operation during the test

Software was programmed into the EUT to maintain continuous transfer mode. The EUT was set at 433.92 MHz. To get a maximum radiated emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis. So, the worst data was recorded in this test report.


-. Duty Cycle

Frequency (MHz)	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]
433.92	197	720	21.48	13.36

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Duty Cycle Factor : $20 * \log(1 / (\text{Duty Cycle} / 100))$

-. Test Plot

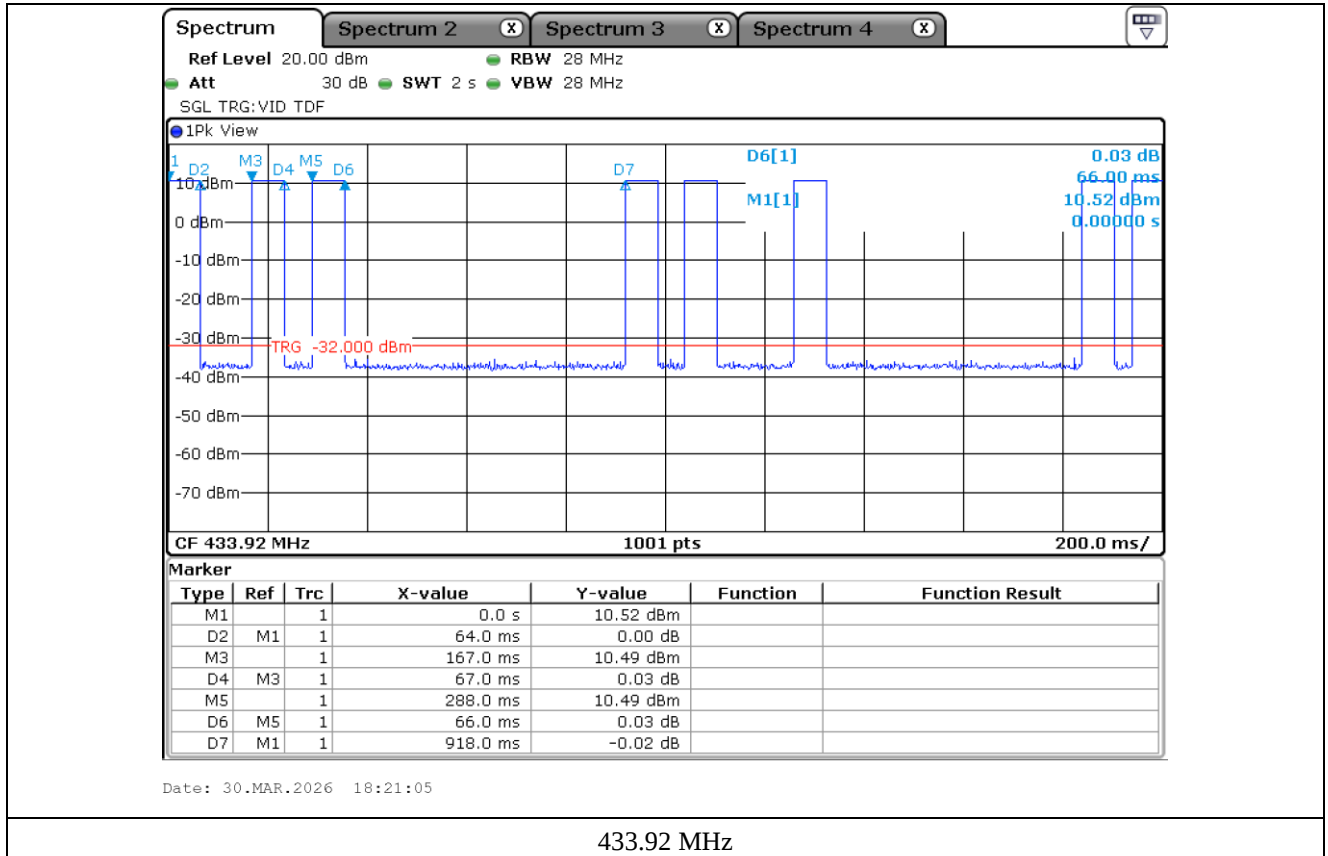

The average field strength may be found by measuring the peak pulse amplitude (in log equivalent units) and determining the duty cycle correction factor (in dB) associated with the pulse modulation as shown in Equation. (ANSI C63.10: 2020)

5.4 Configuration of Test System

Line Conducted Test: The EUT was tested in a Transmitting mode. The EUT was connected to DC Power supply. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is Whip Antenna(Reverse type) on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

7. Bandwidth Measurement


7.1 Operating environment

Temperature : 24 °C

Relative humidity : 53 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 10 kHz, and peak detection was used. The bandwidth of fundamental frequency was measured and recorded.

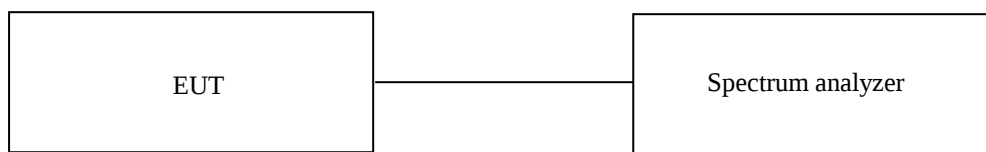

7.3 Test date


March 29, 2026 ~ April 15, 2026

7.4 Test data

-. Test Result : Pass

Frequency (MHz)	20 dB Bandwidth (MHz)	Limit (MHz)
433.92	0.049	1.085

Remark: See next page for measurement data.

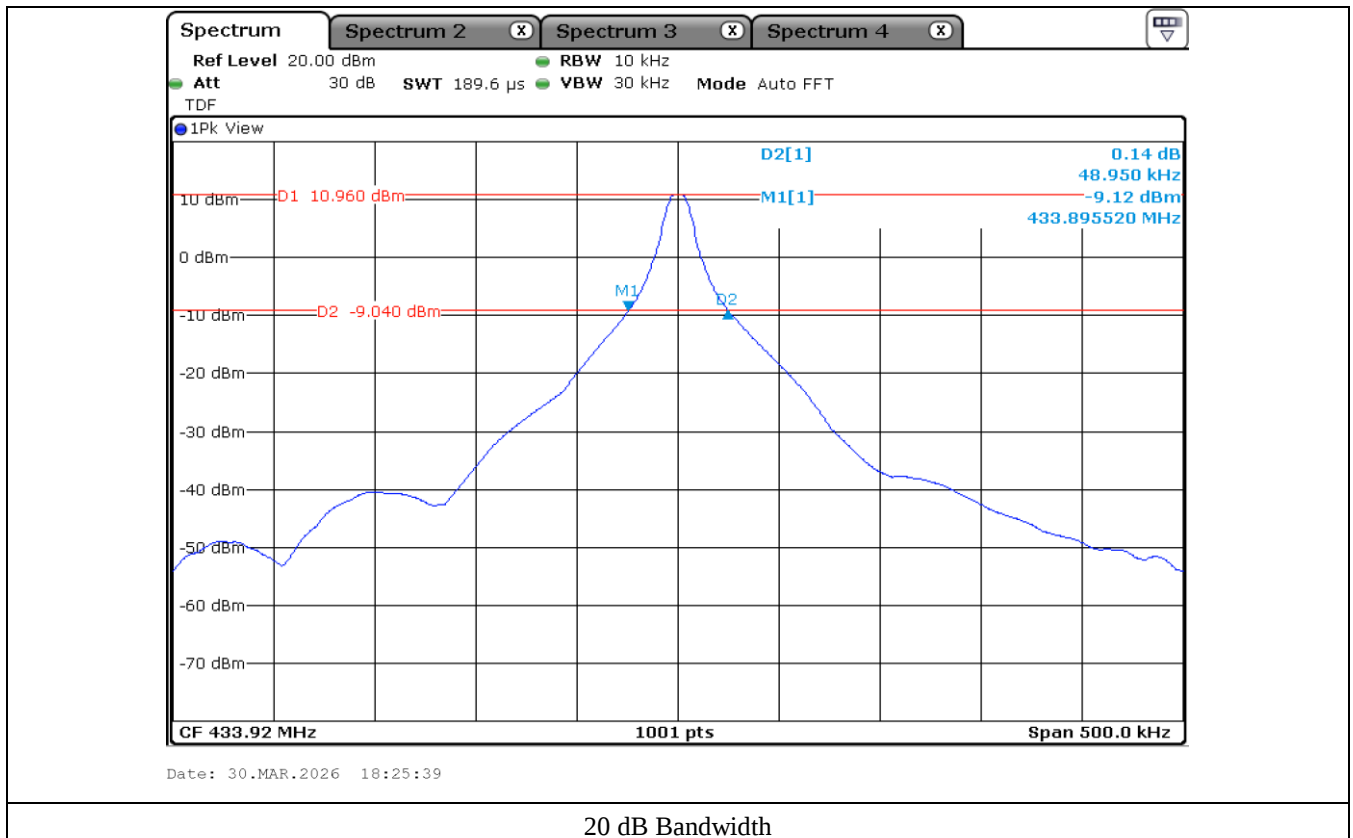

8. Transmission Time


8.1 Operating environment

Temperature : 24 °C

Relative humidity : 53 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The bandwidth of fundamental frequency was measured and recorded.

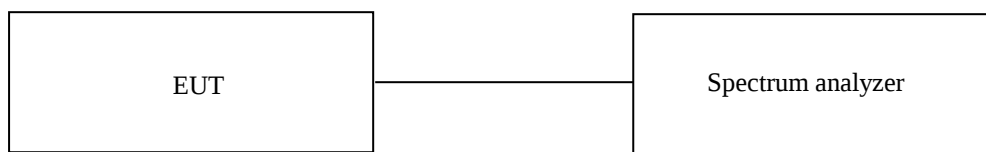

8.3 Test date


March 29, 2026 ~ April 15, 2026

8.4 Test data

-. Test Result : Pass

-. Test Applies : 15.231 (a) (1)

Frequency (MHz)	Transmission Time (s)	Limit (s)	Result
433.92	0.560	5.000	Pass

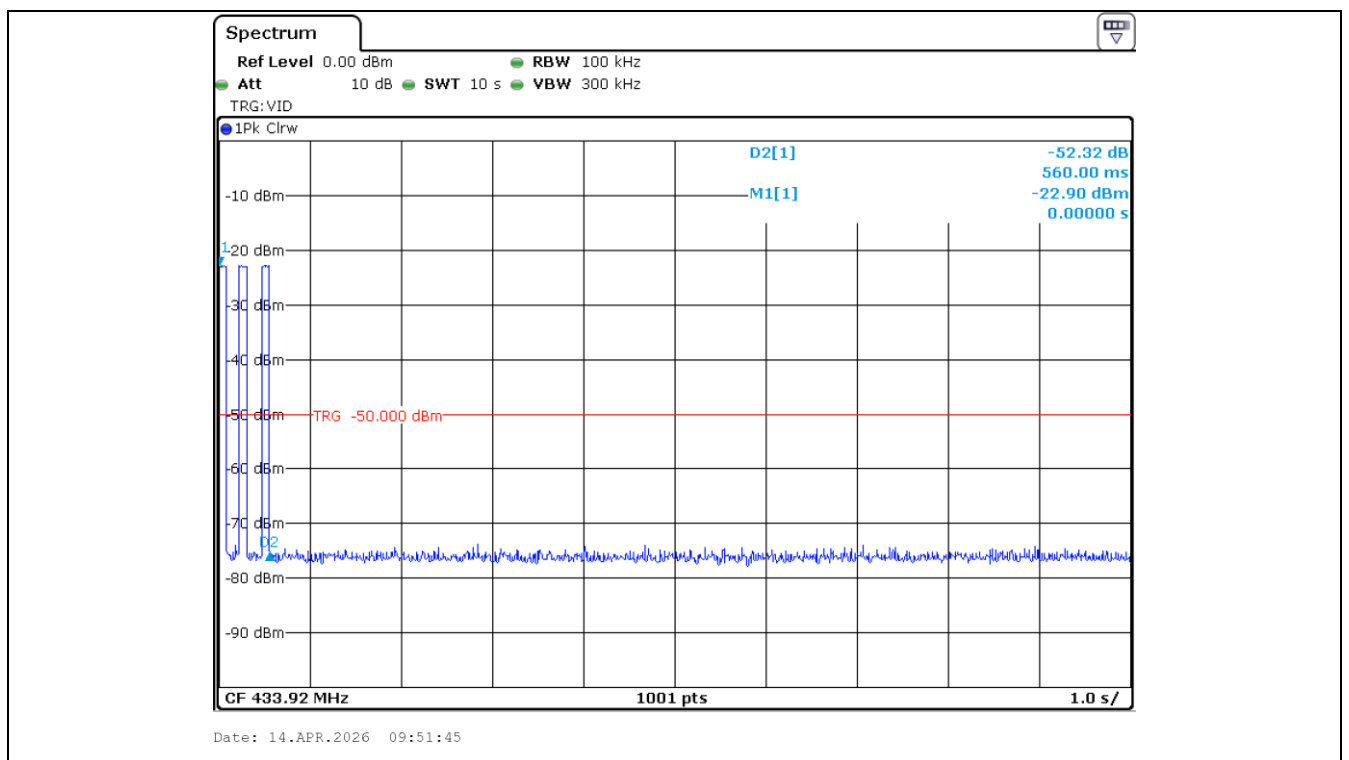

9. Radiated Emission Test

9.1 Regulation

According to §15.209(a), for an intentional device, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency [MHz]	Field strength [μ V/m]	Field strength [dB μ V/m]	Measurement distance [m]
0.009 ~ 0.490	2 400 / F (kHz)	-	300
0.490 ~ 1.705	24 000 / F (kHz)	-	30
1.705 ~ 30	30	29.50	30
30 ~ 88	*100	40.00	3
88 ~ 216	*150	43.52	3
216 ~ 960	*200	46.02	3
Above 960	500	53.98	3

*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

According to §15.231(b), for an intentional device, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency [MHz]	Field strength of Fundamental [μ V/m]	Field strength of Spurious Emissions [μ V/m]
40.66 ~ 40.70	2 250	225
70 ~ 130	1 250	125
130 ~ 174	1 250 ~ 3 750 **	125 ~ 375 **
174 ~ 260	3 750	375
260 ~ 470	3 750 ~ 12 500 **	375 ~ 1 250 **
Above 470	12 500	1 250

** Linear interpolations

9.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 kHz to 1 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

9.3 Test date

March 29, 2026 ~ April 15, 2026

9.4 Test data

9.4.1 Field Strength of Fundamental

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : 53 % R.H. Temperature: 24 °C
 Limits apply to : FCC CFG 47, PART 15, SUBPART C, SECTION 15.231(b)
 Result : PASSED

EUT : Repeater

Operating Condition : TX mode

Distance : 3 m

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
433.92	91.75	Peak	H	22.30	4.40	32.30	-	86.15	100.83	14.68
	-	Average	H	22.30	4.40	32.30	13.36	72.79	80.83	8.04
	84.52	Peak	V	22.30	4.40	32.30	-	78.92	100.83	21.91
	-	Average	V	22.30	4.40	32.30	13.36	65.56	80.83	15.27

Remark : "H": Horizontal, "V": Vertical

Total (dBμV/m) = Reading (dBμV) + Ant Factor (dB) + Cable Loss (dB) – Amp Gain (dB) – Duty Factor (dB)

Margin (dB) = Limits (dBμV/m) - Total (dBμV/m)

9.4.2 Spurious Emission Test & Restricted Band Test

9.4.2.1 Test data for 9 kHz to 30 MHz

-. Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)


-. Frequency range : 9 kHz ~ 30 MHz

-. Measurement distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20 dB below the limit.									

9.4.2.2 Test data for 30 MHz to 1 000 MHz

- Resolution bandwidth : 120 kHz
- Frequency range : 30 MHz ~ 1 000 MHz
- Measurement distance : 3 m

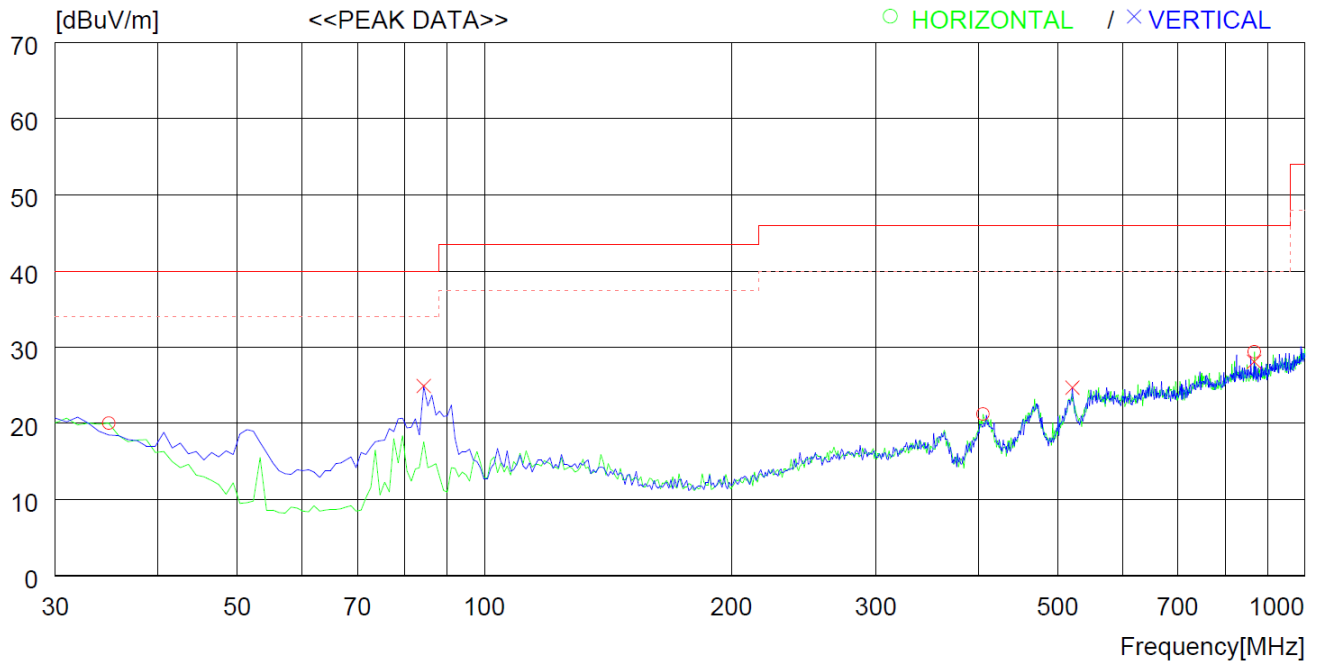

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	34.850	28.6	22.6	1.3	32.5	20.0	40.0	20	100	359
2	405.390	27.6	21.6	4.3	32.3	21.2	46.0	24.8	400	0
3	868.070	28.5	26.4	6.3	31.8	29.4	46.0	16.6	100	359
----- Vertical -----										
4	84.320	41.9	13.5	2.0	32.5	24.9	40.0	15.1	100	0
5	520.820	28.2	24.0	4.9	32.4	24.7	46.0	21.3	200	328
6	867.100	27.2	26.4	6.3	31.8	28.1	46.0	17.9	100	33

Total (dBμV/m) = Reading (dBμV) + Ant Factor (dB) + Cable Loss (dB) – Amp Gain (dB) – Duty Factor (dB)

Margin (dB) = Limits (dBμV/m) - Total (dBμV/m)

9.4.2.3 Test data for above 1 GHz

- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 5 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
1 301.76 ^{1), 2)}	50.64	Peak	H	25.71	5.85	43.02	-	39.18	74.00	34.82
1 301.76 ^{1), 2)}	-	Average	H	25.71	5.85	43.02	13.36	25.82	54.00	28.18
1 301.76 ^{1), 2)}	49.80	Peak	V	25.71	5.85	43.02	-	38.34	74.00	35.66
1 301.76 ^{1), 2)}	-	Average	V	25.71	5.85	43.02	13.36	24.98	54.00	29.02
1 735.68 ¹⁾	50.06	Peak	H	25.00	6.67	42.91	-	38.82	80.83	42.01
1 735.68 ¹⁾	-	Average	H	25.00	6.67	42.91	13.36	25.46	60.83	35.37
1 735.68 ¹⁾	49.71	Peak	V	25.00	6.67	42.91	-	38.47	80.83	42.36
1 735.68 ¹⁾	-	Average	V	25.00	6.67	42.91	13.36	25.11	60.83	35.72
2 169.60 ¹⁾	50.02	Peak	H	27.80	7.55	42.80	-	42.57	80.83	38.26
2 169.60 ¹⁾	-	Average	H	27.80	7.55	42.80	13.36	29.21	60.83	31.62
2 169.60 ¹⁾	49.40	Peak	V	27.80	7.55	42.80	-	41.95	80.83	38.88
2 169.60 ¹⁾	-	Average	V	27.80	7.55	42.80	13.36	28.59	60.83	32.24
2 603.52 ¹⁾	49.27	Peak	H	27.61	8.06	42.71	-	42.23	80.83	38.60
2 603.52 ¹⁾	-	Average	H	27.61	8.06	42.71	13.36	28.87	60.83	31.96
2 603.52 ¹⁾	48.64	Peak	V	27.61	8.06	42.71	-	41.60	80.83	39.23
2 603.52 ¹⁾	-	Average	V	27.61	8.06	42.71	13.36	28.24	60.83	32.59
3 037.44 ¹⁾	49.39	Peak	H	27.67	8.70	42.61	-	43.15	80.83	37.68
3 037.44 ¹⁾	-	Average	H	27.67	8.70	42.61	13.36	29.79	60.83	31.04
3 037.44 ¹⁾	49.27	Peak	V	27.67	8.70	42.61	-	43.03	80.83	37.80
3 037.44 ¹⁾	-	Average	V	27.67	8.70	42.61	13.36	29.67	60.83	31.16
3 471.36 ¹⁾	48.00	Peak	H	28.77	9.47	42.41	-	43.83	80.83	37.00
3 471.36 ¹⁾	-	Average	H	28.77	9.47	42.41	13.36	30.47	60.83	30.36
3 471.36 ¹⁾	48.57	Peak	V	28.77	9.47	42.41	-	44.40	80.83	36.43
3 471.36 ¹⁾	-	Average	V	28.77	9.47	42.41	13.36	31.04	60.83	29.79

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
3 905.28 ^{1), 2)}	49.60	Peak	H	28.64	9.84	42.35	-	45.73	74.00	28.27
3 905.28 ^{1), 2)}	-	Average	H	28.64	9.84	42.35	13.36	32.37	54.00	21.63
3 905.28 ^{1), 2)}	49.83	Peak	V	28.64	9.84	42.35	-	45.96	74.00	28.04
3 905.28 ^{1), 2)}	-	Average	V	28.64	9.84	42.35	13.36	32.60	54.00	21.40
4 339.20 ^{1), 2)}	49.18	Peak	H	30.59	10.17	42.27	-	47.67	74.00	26.33
4 339.20 ^{1), 2)}	-	Average	H	30.59	10.17	42.27	13.36	34.31	54.00	19.69
4 339.20 ^{1), 2)}	48.89	Peak	V	30.59	10.17	42.27	-	47.38	74.00	26.62
4 339.20 ^{1), 2)}	-	Average	V	30.59	10.17	42.27	13.36	34.02	54.00	19.98

Remark : “H”: Horizontal, “V”: Vertical

¹⁾ : Harmonic

²⁾ : Restricted band

Total (dBμV/m) = Reading (dBμV) + Ant Factor (dB) + Cable Loss (dB) – Amp Gain (dB) – Duty Factor (dB)

Margin (dB) = Limits (dBμV/m) - Total (dBμV/m)

10. CONDUCTED EMISSION TEST

10.1 Operating environment

Temperature : 24 °C
Relative humidity : 53 % R.H.

10.2 Test set-up


The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a $50\ \Omega$ / $50\ \mu\text{H}$ + $5\ \Omega$ Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

10.3 Test Date

March 29, 2026 ~ April 15, 2026


10.4 Test data

- . Resolution bandwidth : 9 kHz
- . Frequency range : 0.15 MHz ~ 30 MHz
- . Tested Line : HOT LINE

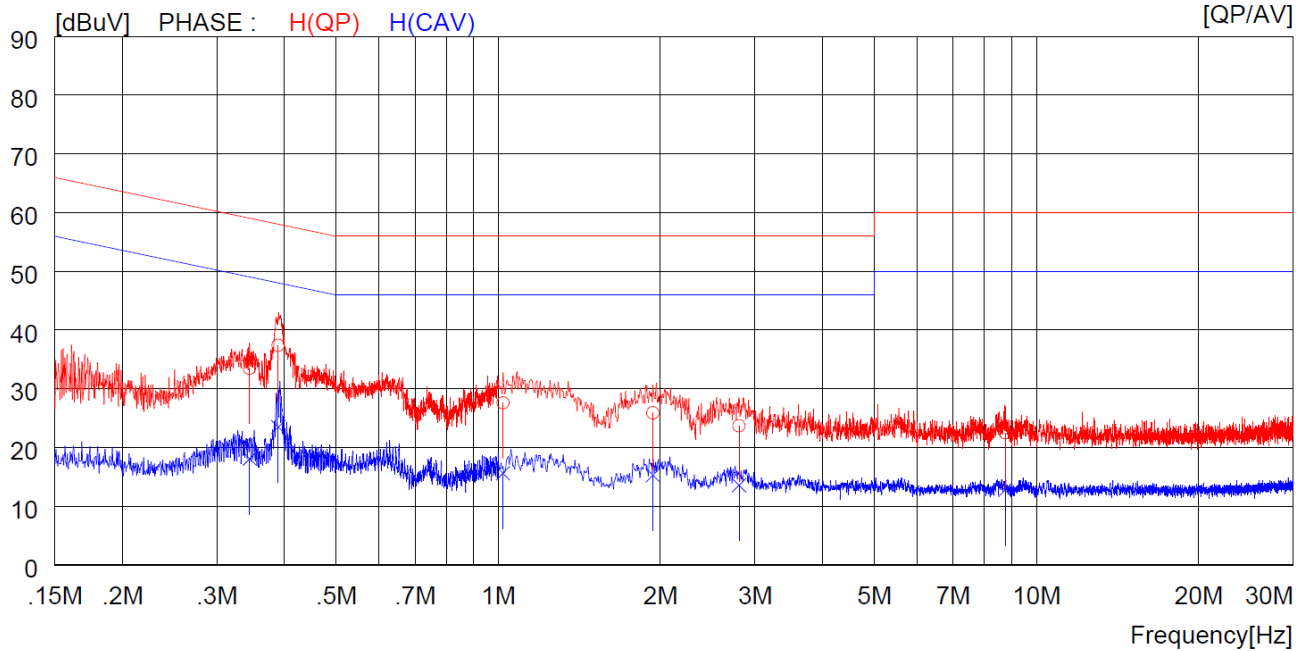

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.34500	23.5	----	10.0	33.5	----	59.1	----	25.6	----	H (QP)
2	0.39000	27.4	----	10.0	37.4	----	58.1	----	20.7	----	H (QP)
3	1.02000	17.6	----	10.0	27.6	----	56.0	----	28.4	----	H (QP)
4	1.93600	15.8	----	10.1	25.9	----	56.0	----	30.1	----	H (QP)
5	2.80000	13.5	----	10.2	23.7	----	56.0	----	32.3	----	H (QP)
6	8.74500	12.2	----	10.3	22.5	----	60.0	----	37.5	----	H (QP)
7	0.34500	----	8.1	10.0	----	18.1	----	49.1	----	31.0	H (CAV)
8	0.39000	----	13.5	10.0	----	23.5	----	48.1	----	24.6	H (CAV)
9	1.02000	----	5.6	10.0	----	15.6	----	46.0	----	30.4	H (CAV)
10	1.93600	----	5.2	10.1	----	15.3	----	46.0	----	30.7	H (CAV)
11	2.80000	----	3.4	10.2	----	13.6	----	46.0	----	32.4	H (CAV)
12	8.74500	----	2.5	10.3	----	12.8	----	50.0	----	37.2	H (CAV)

-. Tested Line : NEUTRAL LINE

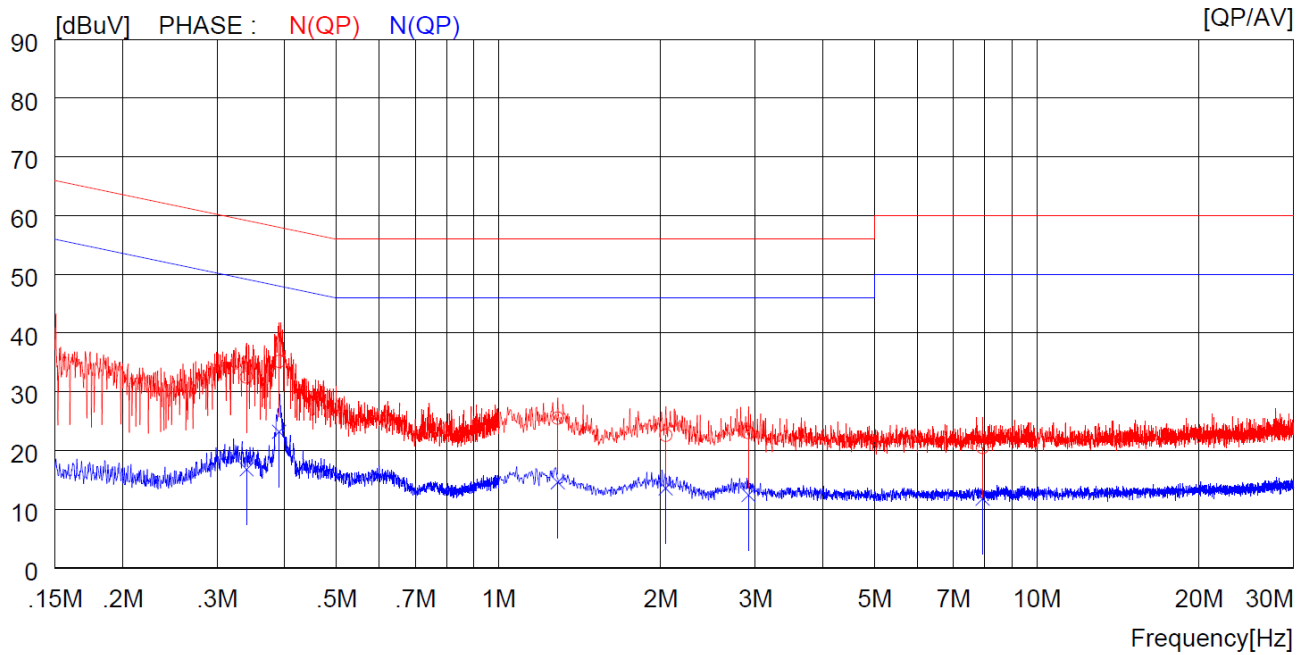

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.34000	22.5	----	10.0	32.5	----	59.2	----	26.7	----	N (QP)
2	0.39100	25.2	----	10.0	35.2	----	58.0	----	22.8	----	N (QP)
3	1.28800	15.5	----	10.0	25.5	----	56.0	----	30.5	----	N (QP)
4	2.04400	12.4	----	10.2	22.6	----	56.0	----	33.4	----	N (QP)
5	2.91200	12.9	----	10.2	23.1	----	56.0	----	32.9	----	N (QP)
6	7.93000	10.2	----	10.3	20.5	----	60.0	----	39.5	----	N (QP)
7	0.34000	----	6.8	10.0	----	16.8	----	49.2	----	32.4	N (CAV)
8	0.39100	----	13.2	10.0	----	23.2	----	48.0	----	24.8	N (CAV)
9	1.28800	----	4.6	10.0	----	14.6	----	46.0	----	31.4	N (CAV)
10	2.04400	----	3.4	10.2	----	13.6	----	46.0	----	32.4	N (CAV)
11	2.91200	----	2.2	10.2	----	12.4	----	46.0	----	33.6	N (CAV)
12	7.93000	----	1.5	10.3	----	11.8	----	50.0	----	38.2	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

11. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40-N	Rohde & Schwarz	SPECTRUM ANALYZER	101457	Jan. 13, 2026 (1Y)
ESR	Rohde & Schwarz	EMI TEST RECEIVER	101470	Mar. 11, 2025 (1Y)
GP-4303D	LG Precision CO.,Ltd	DC Power Supply	5071069	Jan. 04, 2026 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	312544	Mar. 11, 2026 (1Y)
SCU18	Rohde & Schwarz	Pre-Amplifier	102266	Jul. 02, 2025 (1Y)
N/A	PHELCOM.CO	Band Reject Filter	N/A	Jan. 17, 2023 (1Y)
QFA1802-26-6-S	Qualwave	6 dB Attenuator	225342	Jan. 13, 2026 (1Y)
DT3000	Innco System	Turn Table	DT3000/093	N/A
MA4000-EP	Innco System	Antenna Master	MA4000/332/27030611/L	N/A
CO3000	Innco System	Controller	CO3000/904/37211215/L	N/A
HLP-2008	TDK RF Solutions	Hybrid Antenna	131313	Mar. 21, 2025 (2Y)
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 18, 2026 (2Y)
BBHA9120D	Schwarzbeck	Horn Antenna	9120D-1349	Jun. 27, 2025 (1Y)
ESCI	Rohde & Schwarz	EMI TEST RECEIVER	101012	Sep. 24, 2025 (1Y)
NSLK8126	Schwarzbeck	V - LISN (4*16/25A)	8126404	Mar. 11, 2026 (1Y)
ESH3-Z2	Rohde & Schwarz	PULSE LIMITER	100655	Mar. 11, 2026 (1Y)