



SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

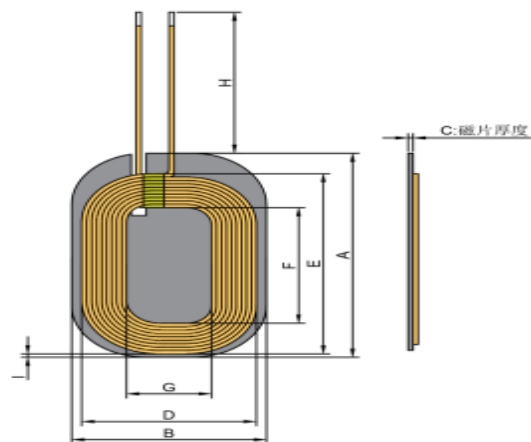

2. SCHEMATICS:



1.Disk size 62*42

2. 1-2Ts;

3.The bottom of the magnetic separator should be covered with adhesive.

A	B	F	G	H	I	C
62±1.0	42±1.0	33±2	17±2	140±5	1±0.3	1.0±0.5

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	Silk-covered wire $\varnothing 0.08 \times 105\text{mm}$ 2UEW	9TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	L	Q value	HI-POT
TEST COND	Coil with magnetic sheet	S-F			
	115-220KHz, 0.25V	AT 25°C			

SPEC	7.0uH±10%	80mΩ Max				
5.BILF OF MATERIAL:						
NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.		
1	Silk braided wire: 0.08 * 105 strands	Acetone wire 0.08*105 strands	NANJINGJINNINGCO,LTD			
2	Lead-free tin rod	lead-free tin strip	QIAODO			
3	magnetic sheet	62*42 Mn-Zn runway hard magnetic sheet slotting	TAIYI CO.,LTD			
4	Glue	xanthan gum 9999	LIANCHENG CO.,LTD			
HRSW ELECTRONICS CO.,LTD			PART NO	6242-7.0uH Adhesive lead long 140mm		
			TITLE			
DRAWN BY		CHECKED BY		APPROVED BY		