



TEST REPORT

FCC ID: 2BU7F-S1ULTRAI

Product : Dash Cam
Model Name : S1 Ultra II, S1 Ultra II Uni, S1 Ultra II Triple,
S1 Ultra II Core, S1 Ultra II Base, S1 Ultra II Solo,
S1 Ultra II Trio
Brand : Miofive
Report No. : NCT26007410XE1-2

Prepared for

Betavision Technology Taiwan Limited

10F., No. 6, Ln. 37, Jiancheng Rd., Xizhi Dist. New Taipei City 221683 Taiwan

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China

TEL: 400-8868-419

FAX: 86-755-27790922

1 TEST RESULT CERTIFICATION

Applicant : Betavision Technology Taiwan Limited

Address : 10F., No. 6, Ln. 37, Jiancheng Rd., Xizhi Dist. New Taipei City 221683 Taiwan

Manufacturer : Betavision Technology Taiwan Limited

Address : 10F., No. 6, Ln. 37, Jiancheng Rd., Xizhi Dist. New Taipei City 221683 Taiwan

Product name : Dash Cam

Model name : S1 Ultra II, S1 Ultra II Uni, S1 Ultra II Triple, S1 Ultra II Core,
S1 Ultra II Base, S1 Ultra II Solo, S1 Ultra II Trio

Standards : FCC CFR47 Part 15 Section 15.247

Test procedure : ANSI C63.10-2020+Cor 1+2023
KDB 558074 D01 15.247 Meas Guidance v05r02

Date of test : Feb. 09, 2026 to Mar. 24, 2026

Date of Issue : Mar. 25, 2026

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:



Keven Wu / Engineer

Technical Manager:



Henry Wang / Manager

Contents

Page

1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF E.U.T.	6
3.2 CHANNEL LIST	7
3.3 TEST SITE	8
3.4 TEST SETUP CONFIGURATION	9
3.5 TEST MODE	9
4 EQUIPMENT DURING TEST	10
4.1 EQUIPMENTS LIST	10
4.2 MEASUREMENT UNCERTAINTY	12
4.3 DESCRIPTION OF SUPPORT UNITS	12
5 CONDUCTED EMISSION	13
5.1 E.U.T. OPERATION	13
5.2 EUT SETUP	13
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
5.4 MEASUREMENT PROCEDURE	14
5.5 CONDUCTED EMISSION LIMIT	14
5.6 MEASUREMENT DESCRIPTION	15
5.7 CONDUCTED EMISSION TEST RESULT	15
6 RADIATED SPURIOUS EMISSIONS	18
6.1 EUT OPERATION	18
6.2 TEST SETUP	19
6.3 SPECTRUM ANALYZER SETUP	20
6.4 TEST PROCEDURE	21
6.5 SUMMARY OF TEST RESULTS	22
7 DUTY CYCLE	33
7.1 LIMIT	33

7.2 TEST SETUP	33
7.3 TEST PROCEDURE	33
7.4 TEST RESULT	33
8 CONDUCT BAND EDGE AND SPURIOUS EMISSIONS MEASUREMENT	34
8.1 TEST SETUP	34
8.2 TEST PROCEDURE	34
8.3 TEST RESULT	34
9 6DB&99% BANDWIDTH MEASUREMENT	35
9.1 TEST SETUP	35
9.2 TEST PROCEDURE	35
9.3 TEST RESULT	35
10 MAXIMUM PEAK OUTPUT POWER	36
10.1 TEST SETUP	36
10.2 TEST PROCEDURE	36
10.3 TEST RESULT	37
11 POWER SPECTRAL DENSITY	38
11.1 TEST SETUP	38
11.2 TEST PROCEDURE	38
11.3 TEST RESULT	38
12 ANTENNA APPLICATION	39
12.1 ANTENNA REQUIREMENT	39
12.2 RESULT	39
13 TEST SETUP AND EUT PHOTOS	40

2 Test Summary

Test Items	Test Requirement	Result
AC Power Line conducted emission	FCC part 15.207	PASS
Radiated Spurious Emissions	FCC part 15.205/15.209	PASS
Duty cycle	ANSI C63.10-2020+Cor 1+2023	PASS
Conducted Spurious Emission	FCC part 15.205/15.209	PASS
Band edge	FCC part 15.247(d)	PASS
6dB&99% Bandwidth	FCC part 15.247 (a)(2)	PASS
Maximum Peak Output Power	FCC part 15.247 (b)(3)	PASS
Power Spectral Density	FCC part 15.247 (e)	PASS
Antenna Requirement	FCC part 15.203/15.247 (b)	PASS

Remark:

"N/A" denotes test is not applicable in this Test Report.

3 General Information

3.1 General Description of E.U.T.

Product Name	:	Dash Cam
Model Name	:	S1 Ultra II
Sample ID	:	NCT26004868E-001#
Sample(s) Status:	:	Engineer sample
Series Model	:	S1 Ultra II Uni, S1 Ultra II Triple, S1 Ultra II Core, S1 Ultra II Base, S1 Ultra II Solo, S1 Ultra II Trio
Model Different.:	:	All models are the same expect for the model name.
Specification	:	802.11b/802.11g/802.11n(HT20)/802.11n(HT40) 802.11ax (HE20)/802.11ax (HE40) (802.11ax Only support full RU Mode)
Operation Frequency	:	2412-2462MHz for 802.11b/g/n20/ax20; 2422-2452MHz for 802.11n40/ax40;
Number of Channel	:	11 channels for 802.11b/g/n20/ax20; 7 channels for 802.11n40/ax40;
Type of Modulation	:	802.11b:(DQPSK, DBPSK, CCK) DSSS 802.11g/n:(64-QAM, 16-QAM, QPSK, BPSK) OFDM 802.11ax:(1024-QAM, 256-QAM, 64-QAM, 16-QAM, QPSK, BPSK) OFDMA
Antenna installation	:	FPC Antenna
Antenna Gain	:	0.34dBi
Power supply	:	DC 5V
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.		

3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20); 802.11ax (HT20): MCS0; 802.11n (HT40); 802.11ax (HT40): MCS0; were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n/ax (HT20/HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Test Frequency and Channel for 802.11 b/g/n/ax (HT20/HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
3	2422	6	2437	9	2452

3.3 Test Site

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150

Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

3.4 Test Setup Configuration

Conducted Emission



Radiated Emission (30MHz-1GHz)



Radiated Emission (above 1GHz)



RF Conducted Test



3.5 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	The EUT enters engineering mode
Power level setup	10

4 Equipment During Test

4.1 Equipments List

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2025/1/17	2028/1/16
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2025/6/10	2026/6/09
LISN	ENV 216	102796	Rohde & Schwarz	2025/6/10	2026/6/09
LISN	VN1-13S	004023	CRANAGE	2025/6/10	2026/6/09
Cable	RG223-1500MM	NA	RG	2025/6/10	2026/6/09

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2025/1/17	2028/1/16
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2025/6/10	2026/6/09
Amplifier (30MHz-1GHz)	BBV 9743 B	00374	SCHWARZBECK	2025/6/10	2026/6/09
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHWARZBECK	2025/6/10	2026/6/09
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHWARZBECK	2025/3/08	2026/3/07
Preamplifier (1GHz-18GHz)	BBV 9718D	0024	SCHWARZBECK	2025/3/10	2026/3/09
Spectrum Analyzer (10Hz-40GHz)	FSV 40	100952	Rohde & Schwarz	2025/6/10	2026/6/09
Preamplifier (18GHz-40GHz)	BBV 9721	0056	SCHWARZBECK	2025/6/10	2026/6/09
Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2025/3/10	2026/3/09
Loop Antenna (9KHz-30MHz)	FMZB 1513-60	00115	SCHWARZBECK	2025/3/10	2026/3/09

Amplifier (9KHz-30MHz)	BBV 9745	00109	SCHWARZBECK	2025/6/13	2026/6/12
MXG Signal Analyzer	N9020A	MY50510202	Agilent	2025/6/10	2026/6/09
MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2025/6/10	2026/6/09
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2025/6/10	2026/6/09
Power Meter	Anritsu	ML2495A	MAX540	2025/6/10	2026/6/09
Power Sensor	TR1029-2	512364	Techoy	2025/6/10	2026/6/09
RF Swith	TR1029-1	512364	Techoy	2025/6/10	2026/6/09
Cable	DA800- 4000MM	NA	DA	2025/6/10	2026/6/09
Cable	DA800- 11000MM	NA	DA	2025/6/10	2026/6/09
Oven	GX-3020-M150	NA	GAOXN	2025/3/09	2026/3/08

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ-EMC	Ver.EMC-CON 3A1.1+
2	EMC radiation test system	FALA	EZ-EMC	Ver.FA-03A2 RE+
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (9KHz~30MHz)	±3.24dB
Radiated Emission(9KHz~30MHz)	±4.51dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Radiated Emission(25GHz~40GHz)	±3.38dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	

4.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Dash Cam	Miofive	S1 Ultra II	N/A	EUT
E-2	Adapter	N/A	X2903	N/A	Auxiliary
E-3					

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

5 Conducted Emission

Test Requirement:	: FCC CFR 47 Part 15 Section 15.207
Test Method	: ANSI C63.10-2020+Cor 1+2023
Test Result	: PASS
Frequency Range	: 150kHz to 30MHz
Class/Severity	: Class B


5.1 E.U.T. Operation

Operating Environment :


Temperature	: 26 °C
Humidity	: 54 % RH
Atmospheric Pressure	: 101.11kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10-2020+Cor 1+2023.

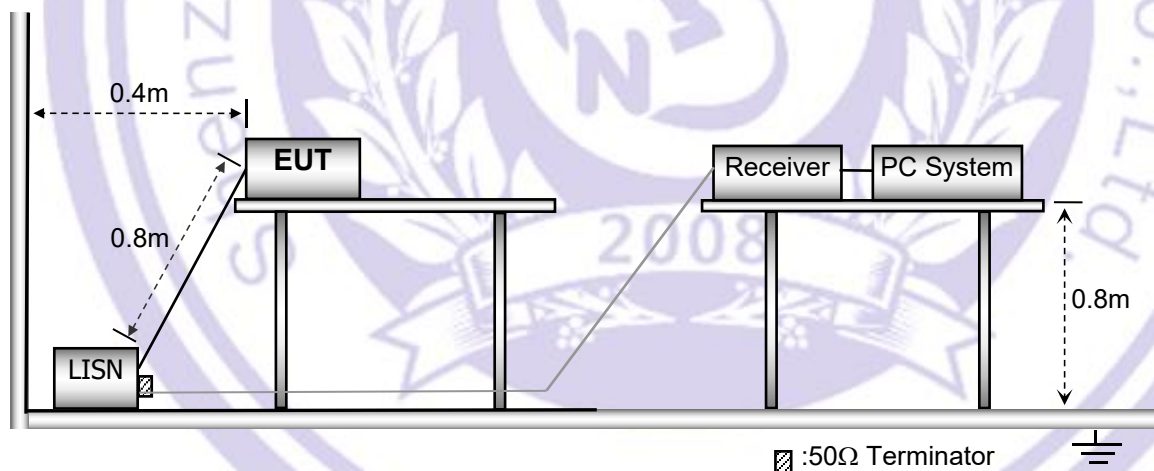

5.3 Test SET-UP (Block Diagram of Configuration)

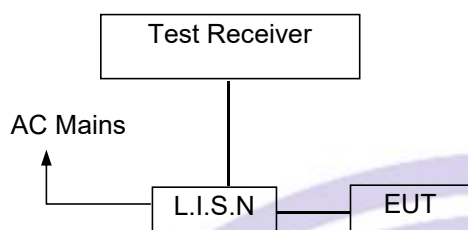

5.4 Measurement Procedure

1. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
2. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
4. LISN at least 80 cm from nearest part of EUT chassis.
5. For the actual test configuration, please refer to the related Item – EUT Test Photos.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


5.7 Conducted Emission Test Result

Pass.

Please refer to the following pages.




Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	DC 5V from adapter input AC 120V/60Hz		

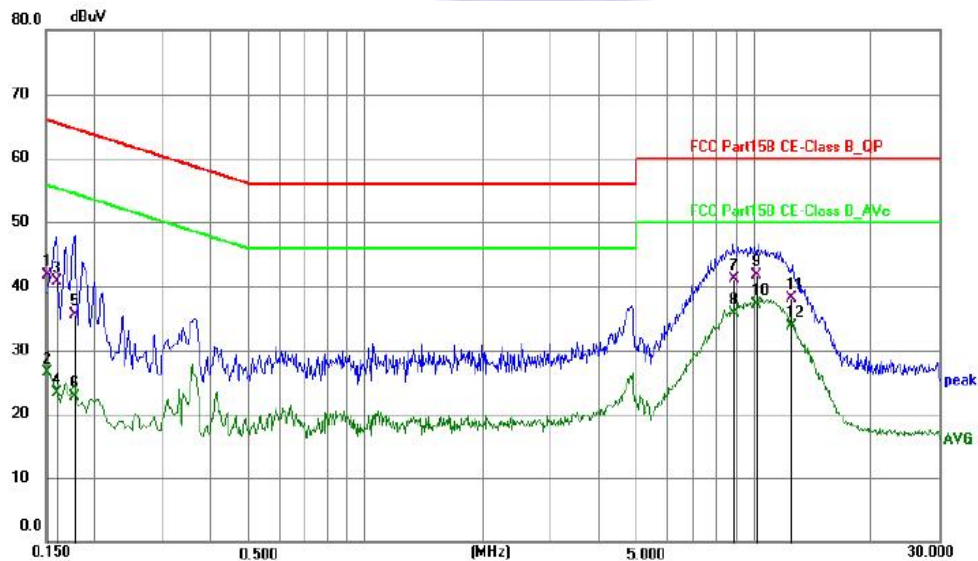

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1520	31.54	10.18	41.72	65.89	-24.17	QP	P
2	0.1520	16.28	10.18	26.46	55.89	-29.43	AVG	P
3	0.1614	30.49	10.18	40.67	65.39	-24.72	QP	P
4	0.1614	13.04	10.18	23.22	55.39	-32.17	AVG	P
5	0.1791	25.29	10.17	35.46	64.53	-29.07	QP	P
6	0.1791	12.59	10.17	22.76	54.53	-31.77	AVG	P
7	8.8802	30.82	10.32	41.14	60.00	-18.86	QP	P
8	8.8802	25.43	10.32	35.75	50.00	-14.25	AVG	P
9	10.1974	31.45	10.35	41.80	60.00	-18.20	QP	P
10 *	10.1974	26.81	10.35	37.16	50.00	-12.84	AVG	P
11	12.5151	27.73	10.45	38.18	60.00	-21.82	QP	P
12	12.5151	23.19	10.45	33.64	50.00	-16.36	AVG	P

Notes: 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Correct Factor = Insertion loss of LISN + Cable loss.
4. Measurement Level = Reading level + Correct Factor.

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	DC 5V from adapter input AC 120V/60Hz		

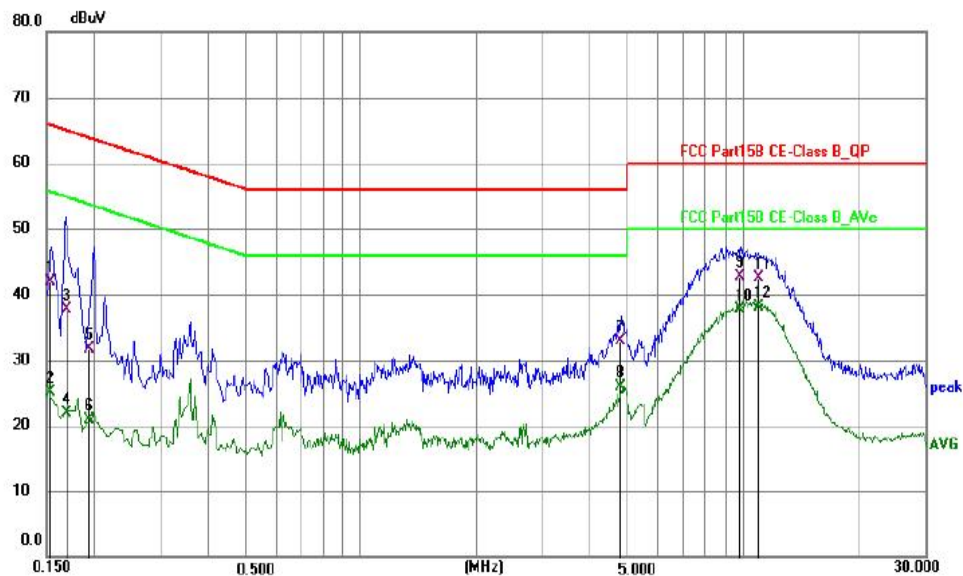

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1537	31.66	10.19	41.85	65.80	-23.95	QP	P
2	0.1537	14.86	10.19	25.05	55.80	-30.75	AVG	P
3	0.1701	27.54	10.18	37.72	64.96	-27.24	QP	P
4	0.1701	11.67	10.18	21.85	54.96	-33.11	AVG	P
5	0.1932	21.54	10.16	31.70	63.90	-32.20	QP	P
6	0.1932	10.68	10.16	20.84	53.90	-33.06	AVG	P
7	4.7985	22.69	10.24	32.93	56.00	-23.07	QP	P
8	4.7985	15.58	10.24	25.82	46.00	-20.18	AVG	P
9	9.8849	32.38	10.35	42.73	60.00	-17.27	QP	P
10	9.8849	27.39	10.35	37.74	50.00	-12.26	AVG	P
11	11.0184	32.14	10.38	42.52	60.00	-17.48	QP	P
12 *	11.0184	27.64	10.38	38.02	50.00	-11.98	AVG	P

Notes: 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
3. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Correct Factor = Insertion loss of LISN + Cable loss.
4. Measurement Level = Reading level + Correct Factor.

6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
Test Method : ANSI C63.10-2020+Cor 1+2023
Test Result : PASS
Measurement Distance : 3m
Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature: : 26°C
Humidity: : 54 % RH
Atmospheric Pressure: : 101.11kPa
Test Voltage : AC 120V/60Hz


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

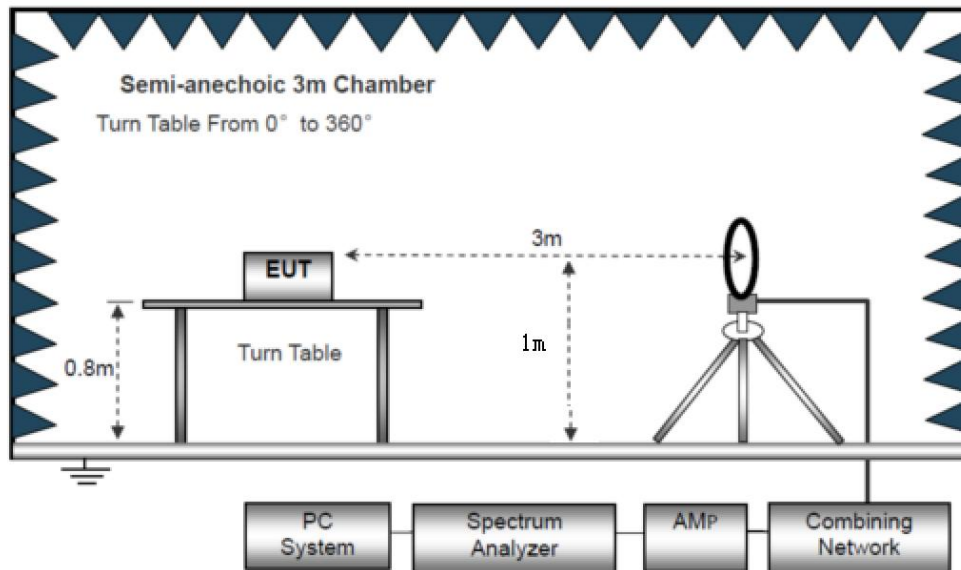

The test setup for emission measurement from 30 MHz to 1 GHz.

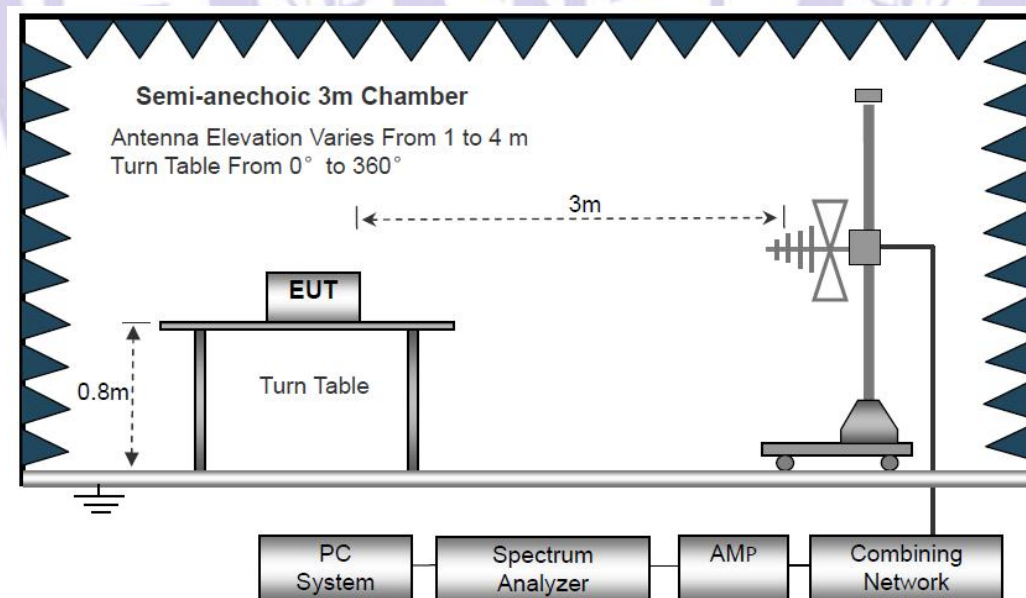

The test setup for emission measurement above 1 GHz

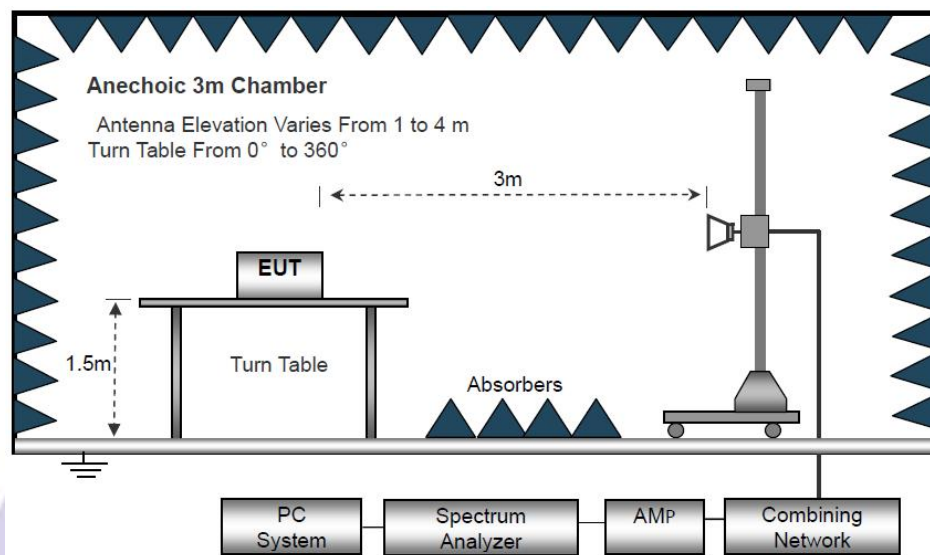

6.3 Spectrum Analyzer Setup

Below 30MHz			
IF Bandwidth	:	10kHz	
Resolution Bandwidth	:	10kHz	
Video Bandwidth	:	10kHz	
30MHz ~ 1GHz			
Detector	:	PK	QP
Resolution Bandwidth	:	100kHz	120kHz
Video Bandwidth	:	300kHz	300kHz
Above 1GHz			
Detector	:	PK	AV
Resolution Bandwidth	:	1MHz	1MHz
Video Bandwidth	:	3MHz	10Hz

6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room

6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor = $40 \log(\text{Specific distance} / \text{test distance})$ (dB);
Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX 802.11b Low Channel) are recorded in the following pages and the others modulation methods do not exceed the limits.


Please refer to the following test plots:

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 5V from adapter input AC 120V/60Hz		

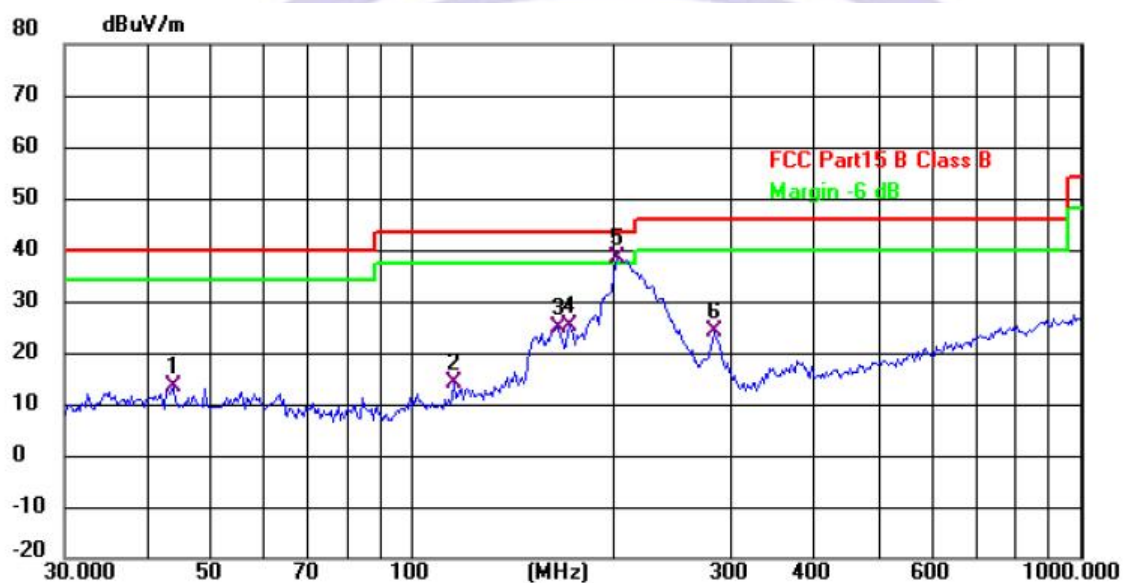

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	43.8120	26.68	-13.27	13.41	40.00	-26.59	QP
2	115.3204	28.62	-14.36	14.26	43.50	-29.24	QP
3	164.9072	37.50	-12.60	24.90	43.50	-18.60	QP
4	171.9944	38.80	-13.60	25.20	43.50	-18.30	QP
5 *	202.1004	53.81	-15.49	38.32	43.50	-5.18	QP
6	282.9849	36.99	-12.90	24.09	46.00	-21.91	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 5V from adapter input AC 120V/60Hz		

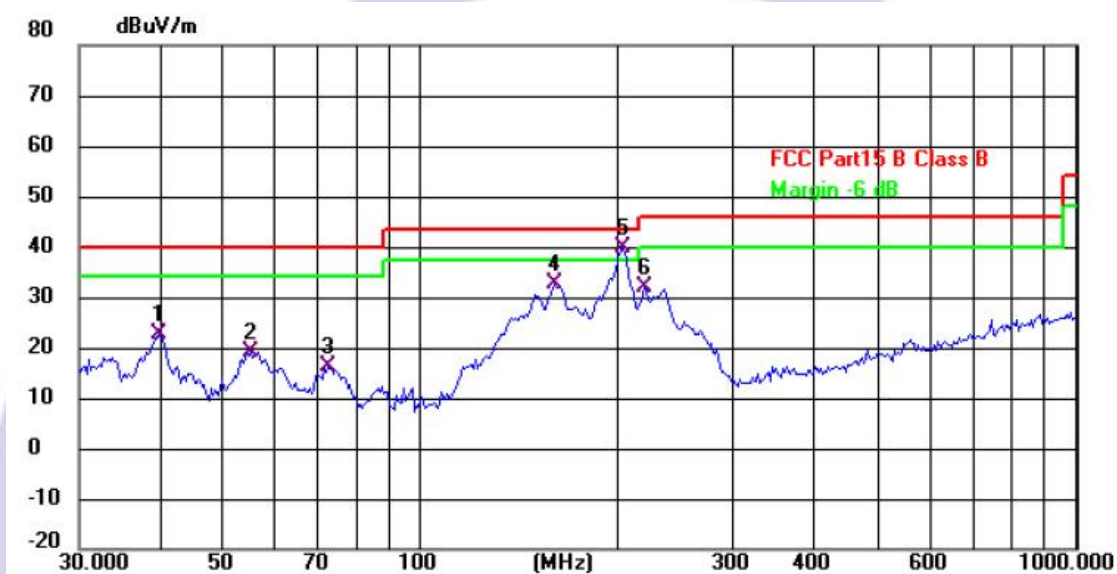

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.7146	35.71	-13.14	22.57	40.00	-17.43	QP
2	54.8348	32.92	-13.85	19.07	40.00	-20.93	QP
3	72.0841	32.38	-16.18	16.20	40.00	-23.80	QP
4	160.3454	44.59	-11.95	32.64	43.50	-10.86	QP
5 *	203.5226	55.24	-15.45	39.79	43.50	-3.71	QP
6	219.8446	46.85	-15.06	31.79	46.00	-14.21	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - Pre-amplifier.

Test Frequency: From 1GHz to 25GHz

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:2412MHz									
V	4824.00	53.46	34.12	5.03	32.39	56.76	74.00	-17.24	PK
V	4824.00	39.81	34.12	5.03	32.39	43.11	54.00	-10.89	AV
V	7236.00	50.12	32.54	6.29	35.86	59.73	74.00	-14.27	PK
V	7236.00	36.06	32.54	6.29	35.86	45.67	54.00	-8.33	AV
V	9648.00	44.08	32.98	7.55	38.4	57.05	74.00	-16.95	PK
V	9648.00	32.74	32.98	7.55	38.4	45.71	54.00	-8.29	AV
V	12060.00	41.95	32.09	8.93	39	57.79	74.00	-16.21	PK
V	12060.00	30.87	32.09	8.93	39	46.71	54.00	-7.29	AV
H	4824.00	51.84	34.12	5.03	32.39	55.14	74.00	-18.86	PK
H	4824.00	37.9	34.12	5.03	32.39	41.2	54.00	-12.80	AV
H	7236.00	46.41	32.54	6.29	35.86	56.02	74.00	-17.98	PK
H	7236.00	33.77	32.54	6.29	35.86	43.38	54.00	-10.62	AV
H	9648.00	46.03	32.98	7.55	38.4	59	74.00	-15.00	PK
H	9648.00	30.87	32.98	7.55	38.4	43.84	54.00	-10.16	AV
H	12060.00	42.52	32.09	8.93	39	58.36	74.00	-15.64	PK
H	12060.00	28.48	32.09	8.93	39	44.32	54.00	-9.68	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874.00	54.1	30.55	5.77	24.66	53.98	74.00	-20.02	PK
V	4874.00	42.79	30.55	5.77	24.66	42.67	54.00	-11.33	AV
V	7311.00	54.48	30.33	6.32	24.55	55.02	74.00	-18.98	PK
V	7311.00	43.17	30.33	6.32	24.55	43.71	54.00	-10.29	AV
V	9748.00	54.36	30.85	7.45	24.69	55.65	74.00	-18.35	PK
V	9748.00	44.36	30.85	7.45	24.69	45.65	54.00	-8.35	AV
V	12185.00	52.44	31.02	8.99	25.57	55.98	74.00	-18.02	PK
V	12185.00	42.65	31.02	8.99	25.57	46.19	54.00	-7.81	AV
H	4874.00	52.53	30.55	5.77	24.66	52.41	74.00	-21.59	PK
H	4874.00	42.08	30.55	5.77	24.66	41.96	54.00	-12.04	AV
H	7311.00	53.29	30.33	6.32	24.55	53.83	74.00	-20.17	PK
H	7311.00	42.48	30.33	6.32	24.55	43.02	54.00	-10.98	AV
H	9748.00	52.45	30.85	7.45	24.69	53.74	74.00	-20.26	PK
H	9748.00	42.26	30.85	7.45	24.69	43.55	54.00	-10.45	AV
H	12185.00	54.75	31.02	8.99	25.57	58.29	74.00	-15.71	PK
H	12185.00	42.25	31.02	8.99	25.57	45.79	54.00	-8.21	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	54.06	30.55	5.77	24.66	53.94	74.00	-20.06	PK
V	4924.00	44.09	30.55	5.77	24.66	43.97	54.00	-10.03	AV
V	7386.00	52.82	30.33	6.32	24.55	53.36	74.00	-20.64	PK
V	7386.00	42.71	30.33	6.32	24.55	43.25	54.00	-10.75	AV
V	9848.00	55.35	30.85	7.45	24.69	56.64	74.00	-17.36	PK
V	9848.00	42.43	30.85	7.45	24.69	43.72	54.00	-10.28	AV
V	12310.00	54.91	31.02	8.99	25.57	58.45	74.00	-15.55	PK
V	12310.00	42.97	31.02	8.99	25.57	46.51	54.00	-7.49	AV
H	4924.00	53.33	30.55	5.77	24.66	53.21	74.00	-20.79	PK
H	4924.00	44.38	30.55	5.77	24.66	44.26	54.00	-9.74	AV
H	7386.00	54.86	30.33	6.32	24.55	55.4	74.00	-18.6	PK
H	7386.00	43.8	30.33	6.32	24.55	44.34	54.00	-9.66	AV
H	9848.00	53.41	30.85	7.45	24.69	54.7	74.00	-19.3	PK
H	9848.00	42.28	30.85	7.45	24.69	43.57	54.00	-10.43	AV
H	12310.00	53.38	31.02	8.99	25.57	56.92	74.00	-17.08	PK
H	12310.00	42.9	31.02	8.99	25.57	46.44	54.00	-7.56	AV

Note:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. We test all the mode and recorded the worst mode (802.11b) in the report.

Radiated Band Emission Measurement:

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
802.11b	Low Channel 2412MHz									
	H	2390.00	58.78	35.17	3.48	27.49	54.58	74.00	PK	PASS
	H	2390.00	50.59	35.17	3.48	27.49	46.39	54.00	AV	PASS
	H	2400.00	61.42	35.16	3.49	27.52	57.27	74.00	PK	PASS
	H	2400.00	50.96	35.16	3.49	27.52	46.81	54.00	AV	PASS
	V	2390.00	59.04	35.17	3.48	27.49	54.84	74.00	PK	PASS
	V	2390.00	52.05	35.17	3.48	27.49	47.85	54.00	AV	PASS
	V	2400.00	60.83	35.16	3.49	27.52	56.68	74.00	PK	PASS
	V	2400.00	50.67	35.16	3.49	27.52	46.52	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	58.52	35.11	3.56	27.75	54.72	74.00	PK	PASS
	H	2483.50	50.29	35.11	3.56	27.75	46.49	54.00	AV	PASS
	H	2500.00	60.04	35.1	3.57	27.8	56.31	74.00	PK	PASS
	H	2500.00	50.25	35.1	3.57	27.8	46.52	54.00	AV	PASS
	V	2483.50	59.42	35.11	3.56	27.75	55.62	74.00	PK	PASS
	V	2483.50	51.64	35.11	3.56	27.75	47.84	54.00	AV	PASS
	V	2500.00	58.59	35.1	3.57	27.8	54.86	74.00	PK	PASS
	V	2500.00	50.97	35.1	3.57	27.8	47.24	54.00	AV	PASS
802.11g	Low Channel 2412MHz									
	H	2390.00	57.76	35.17	3.48	27.49	53.56	74.00	PK	PASS
	H	2390.00	49.66	35.17	3.48	27.49	45.46	54.00	AV	PASS
	H	2400.00	59.13	35.16	3.49	27.52	54.98	74.00	PK	PASS
	H	2400.00	50.33	35.16	3.49	27.52	46.18	54.00	AV	PASS

802.11 n20	V	2390.00	57.82	35.17	3.48	27.49	53.62	74.00	PK	PASS
	V	2390.00	49.45	35.17	3.48	27.49	45.25	54.00	AV	PASS
	V	2400.00	59.64	35.16	3.49	27.52	55.49	74.00	PK	PASS
	V	2400.00	49.49	35.16	3.49	27.52	45.34	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	56.86	35.11	3.56	27.75	53.06	74.00	PK	PASS
	H	2483.50	49.04	35.11	3.56	27.75	45.24	54.00	AV	PASS
	H	2500.00	58.95	35.1	3.57	27.8	55.22	74.00	PK	PASS
	H	2500.00	49.22	35.1	3.57	27.8	45.49	54.00	AV	PASS
	V	2483.50	57.77	35.11	3.56	27.75	53.97	74.00	PK	PASS
	V	2483.50	50.4	35.11	3.56	27.75	46.6	54.00	AV	PASS
	V	2500.00	58.67	35.1	3.57	27.8	54.94	74.00	PK	PASS
	V	2500.00	49.93	35.1	3.57	27.8	46.2	54.00	AV	PASS
	Low Channel 2412MHz									
	H	2390.00	57.85	35.17	3.48	27.49	53.65	74.00	PK	PASS
	H	2390.00	50.12	35.17	3.48	27.49	45.92	54.00	AV	PASS
	H	2400.00	60.82	35.16	3.49	27.52	56.67	74.00	PK	PASS
	H	2400.00	50.12	35.16	3.49	27.52	45.97	54.00	AV	PASS
	V	2390.00	58.39	35.17	3.48	27.49	54.19	74.00	PK	PASS
	V	2390.00	50.91	35.17	3.48	27.49	46.71	54.00	AV	PASS
	V	2400.00	60.01	35.16	3.49	27.52	55.86	74.00	PK	PASS
	V	2400.00	50.72	35.16	3.49	27.52	46.57	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	58.11	35.11	3.56	27.75	54.31	74.00	PK	PASS
	H	2483.50	48.85	35.11	3.56	27.75	45.05	54.00	AV	PASS
	H	2500.00	59.83	35.1	3.57	27.8	56.1	74.00	PK	PASS

	H	2500.00	50.46	35.1	3.57	27.8	46.73	54.00	AV	PASS
	V	2483.50	58.5	35.11	3.56	27.75	54.7	74.00	PK	PASS
	V	2483.50	50.68	35.11	3.56	27.75	46.88	54.00	AV	PASS
	V	2500.00	59.31	35.1	3.57	27.8	55.58	74.00	PK	PASS
	V	2500.00	50.25	35.1	3.57	27.8	46.52	54.00	AV	PASS
802.11 ax20	Low Channel 2412MHz									
	H	2390.00	58.24	35.17	3.48	27.49	54.04	74.00	PK	PASS
	H	2390.00	50.48	35.17	3.48	27.49	46.28	54.00	AV	PASS
	H	2400.00	61.23	35.16	3.49	27.52	57.08	74.00	PK	PASS
	H	2400.00	51.67	35.16	3.49	27.52	47.52	54.00	AV	PASS
	V	2390.00	59.16	35.17	3.48	27.49	54.96	74.00	PK	PASS
	V	2390.00	51.34	35.17	3.48	27.49	47.14	54.00	AV	PASS
	V	2400.00	60.61	35.16	3.49	27.52	56.46	74.00	PK	PASS
	V	2400.00	51.04	35.16	3.49	27.52	46.89	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	59.16	35.11	3.56	27.75	55.36	74.00	PK	PASS
	H	2483.50	50.24	35.11	3.56	27.75	46.44	54.00	AV	PASS
	H	2500.00	59.87	35.1	3.57	27.8	56.14	74.00	PK	PASS
	H	2500.00	50.74	35.1	3.57	27.8	47.01	54.00	AV	PASS
	V	2483.50	59.3	35.11	3.56	27.75	55.5	74.00	PK	PASS
	V	2483.50	51.66	35.11	3.56	27.75	47.86	54.00	AV	PASS
	V	2500.00	58.88	35.1	3.57	27.8	55.15	74.00	PK	PASS
	V	2500.00	51.57	35.1	3.57	27.8	47.84	54.00	AV	PASS
802.11 n40	Low Channel 2422MHz									
	H	2390.00	57.8	35.17	3.48	27.49	53.6	74.00	PK	PASS
	H	2390.00	50.13	35.17	3.48	27.49	45.93	54.00	AV	PASS

	H	2400.00	59.34	35.16	3.49	27.52	55.19	74.00	PK	PASS
	H	2400.00	50.71	35.16	3.49	27.52	46.56	54.00	AV	PASS
	V	2390.00	57.82	35.17	3.48	27.49	53.62	74.00	PK	PASS
	V	2390.00	49.12	35.17	3.48	27.49	44.92	54.00	AV	PASS
	V	2400.00	59.54	35.16	3.49	27.52	55.39	74.00	PK	PASS
	V	2400.00	49.63	35.16	3.49	27.52	45.48	54.00	AV	PASS
	High Channel 2452MHz									
	H	2483.50	57.49	35.11	3.56	27.75	53.69	74.00	PK	PASS
	H	2483.50	48.75	35.11	3.56	27.75	44.95	54.00	AV	PASS
	H	2500.00	59.41	35.1	3.57	27.8	55.68	74.00	PK	PASS
	H	2500.00	49.35	35.1	3.57	27.8	45.62	54.00	AV	PASS
	V	2483.50	58.28	35.11	3.56	27.75	54.48	74.00	PK	PASS
	V	2483.50	50.44	35.11	3.56	27.75	46.64	54.00	AV	PASS
	V	2500.00	58.59	35.1	3.57	27.8	54.86	74.00	PK	PASS
	V	2500.00	49.73	35.1	3.57	27.8	46	54.00	AV	PASS
802.11 ax40	Low Channel 2422MHz									
	H	2390.00	57.95	35.17	3.48	27.49	53.75	74.00	PK	PASS
	H	2390.00	50.49	35.17	3.48	27.49	46.29	54.00	AV	PASS
	H	2400.00	60.57	35.16	3.49	27.52	56.42	74.00	PK	PASS
	H	2400.00	49.77	35.16	3.49	27.52	45.62	54.00	AV	PASS
	V	2390.00	58.16	35.17	3.48	27.49	53.96	74.00	PK	PASS
	V	2390.00	51.12	35.17	3.48	27.49	46.92	54.00	AV	PASS
	V	2400.00	59.83	35.16	3.49	27.52	55.68	74.00	PK	PASS
	V	2400.00	50.67	35.16	3.49	27.52	46.52	54.00	AV	PASS
	High Channel 2452MHz									
	H	2483.50	57.89	35.11	3.56	27.75	54.09	74.00	PK	PASS

	H	2483.50	49.05	35.11	3.56	27.75	45.25	54.00	AV	PASS
	H	2500.00	59.92	35.1	3.57	27.8	56.19	74.00	PK	PASS
	H	2500.00	50.41	35.1	3.57	27.8	46.68	54.00	AV	PASS
	V	2483.50	58.88	35.11	3.56	27.75	55.08	74.00	PK	PASS
	V	2483.50	50.37	35.11	3.56	27.75	46.57	54.00	AV	PASS
	V	2500.00	59.34	35.1	3.57	27.8	55.61	74.00	PK	PASS
	V	2500.00	50.73	35.1	3.57	27.8	47	54.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.




7 Duty cycle

7.1 Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247
Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2020
Test Result: PASS

7.2 Test Setup



7.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - a) Set the center frequency of the instrument to the center frequency of the transmission.
 - b) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - c) Set $VBW \geq RBW$. Detector = peak or average.
 - d) Sweep time = auto couple.
 - e) Trace mode = max hold.
 - f) Allow trace to fully stabilize.


7.4 Test Result

Please see the attchment for the data.

8 Conduct Band Edge And Spurious Emissions Measurement

Test Requirement	:	FCC CFR47 Part 15 Section 15.247
Test Method	:	ANSI C63.10-2020+Cor 1+2023
Test Limit	:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.1 Test Setup



8.2 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector fuNCTion = peak, Trace = max hold

8.3 Test Result

Please see the attachment for the data.


9 6dB&99% Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10-2020+Cor 1+2023

Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

9.1 Test Setup



9.2 Test Procedure

For 6dB Bandwidth Measurement

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: $RBW = 1\%-5\% \text{ OBW}$, $VBW \geq 3RBW$

For 99% Bandwidth Measurement

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: $RBW = 1\%-5\% \text{ OBW}$, $VBW \geq 3RBW$

9.3 Test Result

Please see the attachment for the data.

10 Maximum Peak Output Power

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10-2020+Cor 1+2023
Test Limit	: Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

10.1 Test Setup



10.2 Test Procedure

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.


10.3 Test Result

Mode	Test Channel	Peak Output Power (dBm)	LIMIT (dBm)	Result
802.11b	Low	16.30	30.00	PASS
	Moddle	17.22	30.00	PASS
	High	17.12	30.00	PASS
802.11g	Low	19.28	30.00	PASS
	Moddle	20.15	30.00	PASS
	High	20.35	30.00	PASS
802.11n HT20	Low	19.59	30.00	PASS
	Moddle	20.43	30.00	PASS
	High	20.68	30.00	PASS
802.11ax HT20	Low	19.47	30.00	PASS
	Moddle	20.44	30.00	PASS
	High	20.58	30.00	PASS
802.11n HT40	Low	20.49	30.00	PASS
	Moddle	20.43	30.00	PASS
	High	20.21	30.00	PASS
802.11ax HT40	Low	20.51	30.00	PASS
	Moddle	20.41	30.00	PASS
	High	20.24	30.00	PASS

11 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10-2020+Cor 1+2023
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

11.1 Test Setup



11.2 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz, Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector FuNCTion = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta fuNCTion to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.3 Test Result

Please see the attachment for the data.


12 Antenna Application

12.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2 Result

The EUT'S antenna, permanent attached antenna, is FPC Antenna. The antenna's gain is 0.34 dBi and meets the requirement.

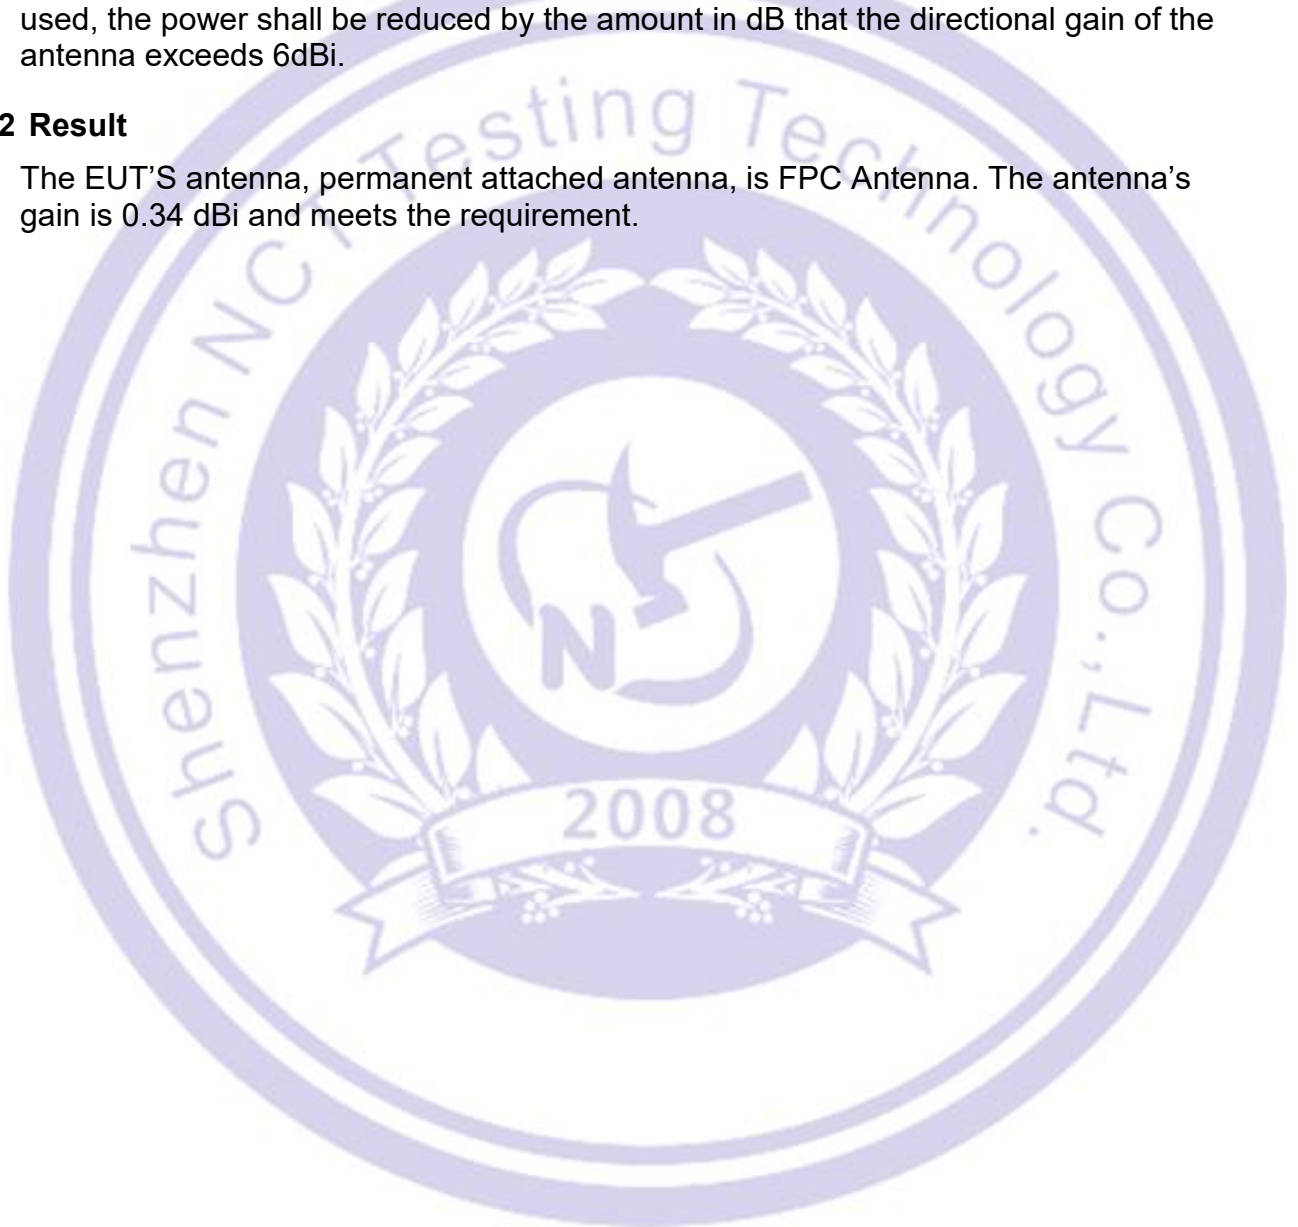

13 Test Setup and EUT Photos

Reference to the attachment for details.

*****THE END REPORT*****

