

FCC RADIO TEST REPORT

Applicant..... : Wavefuture Robotics Technology (Suzhou) Co., Ltd.

Address..... : 1/F, Building B, No. 7 Qian Zhu Road, Taihu Street, Wuzhong District, Suzhou,
215104 Jiangsu, P.R. China

Manufacturer..... : Wavefuture Robotics Technology (Suzhou) Co., Ltd.

Address..... : 1/F, Building B, No. 7 Qian Zhu Road, Taihu Street, Wuzhong District, Suzhou,
215104 Jiangsu, P.R. China

Factory..... : Huzhou Luxshare Precision Industry Co., Ltd.

Address..... : No. 399, Shengxun Road, Zhili Town, Wuxing District, Huzhou City, Zhejiang,
P.R. China

Product Name..... : Wireless Charging Dock

Brand Name..... : MOVA, Nexlawn **MOVA NexLawn**

Model No. : AD1

FCC ID..... : 2BUDP-G2526AD1

Measurement Standard..... : 47 CFR FCC Part 15, Subpart C

Receipt Date of Samples..... : March 04, 2026

Date of Tested..... : March 04, 2026 to March 24, 2026

Date of Report..... : April 09, 2026

This report shows that above equipment is technically compliant with the requirements of the standards above. All test results in this report apply only to the tested sample(s). Without prior written approval of Dongguan Nore Testing Center Co., Ltd, this report shall not be reproduced except in full.



Prepared by

Jenny Liu / Project Engineer



Iori Fan / Authorized Signatory

Table of Contents

1. Summary of Test Result.....	4
2. General Description of EUT	5
3. Test Channels and Modes Detail	7
4. Configuration of EUT	7
5. Modification of EUT	7
6. Description of Support Device.....	7
7. Test Facility and Location	8
8. Applicable Standards and References.....	9
9. Deviations and Abnormalities from Standard Conditions	9
10. Test Conditions	9
11. Measurement Uncertainty	10
12. Sample Calculations	11
13. Test Items and Results	12
13.1 Conducted Emissions Measurement.....	12
13.2 Radiated Spurious Emissions and Restricted Bands Measurement.....	16
13.3 20dB Bandwidth Measurement.....	26
13.4 Antenna Requirement.....	28
14. Test Equipment List.....	29

Revision History

[illegible]

1. Summary of Test Result

FCC Rules	Description of Test	Result	Remarks
§15.207 (a)	AC Power Conducted Emission	PASS	---
§15.209	Radiated Emissions	PASS	---
§15.215(c)	20dB Bandwidth	PASS	---
§15.203	Antenna Requirement	PASS	---

2. General Description of EUT


Product Information	
Product Name:	Wireless Charging Dock
Main Model Name:	AD1
Additional Model Name:	N/A
Model Difference:	N/A
S/N:	N/A
Brand Name:	MOVA, Nexlawn, MOVA NexLawn
Hardware Version:	V1.0.1
Software Version:	V1.0.1
Rating:	24.9Vdc / 3A from external AC/DC Adapter Wireless charger output: 18-25.2Vdc, 3A Max, 75W Max
Typical Arrangement:	Floor-standing
I/O Port:	Refer to user manual
Accessories Information	
Adapter:	Manufacturer: FOSHAN SHUNDE GUANYUDA POWER SUPPLY CO., LTD M/N: GM130-2940350-2FG Input: 100-240V~50/60Hz, 2.5A Output: 29.4Vdc, 3.5A, 102.9W
Cable:	AC Power Cord: 1.45m DC Line: 1.05m, unshielded, undetachable, with a ferrite
Other:	N/A
Additional Information	
Note:	N/A
Remark:	All the information above are provided by the manufacturer. More detailed feature of the EUT please refers to the user manual.

Technical Specification	
Frequency Range:	110.1-200KHz
Test frequency:	110.779KHz
Modulation type:	ASK
Antenna Type:	Coil antenna
Number of Antenna:	1
Output power for coil:	75W

3. Test Channels and Modes Detail

Mode		Modulation
1	Wireless Charging (Full Load 75W)	ASK
2	Wireless Charging (Half Load 40W)	ASK
3	Wireless Charging (Light Load 10W)	ASK

4. Configuration of EUT

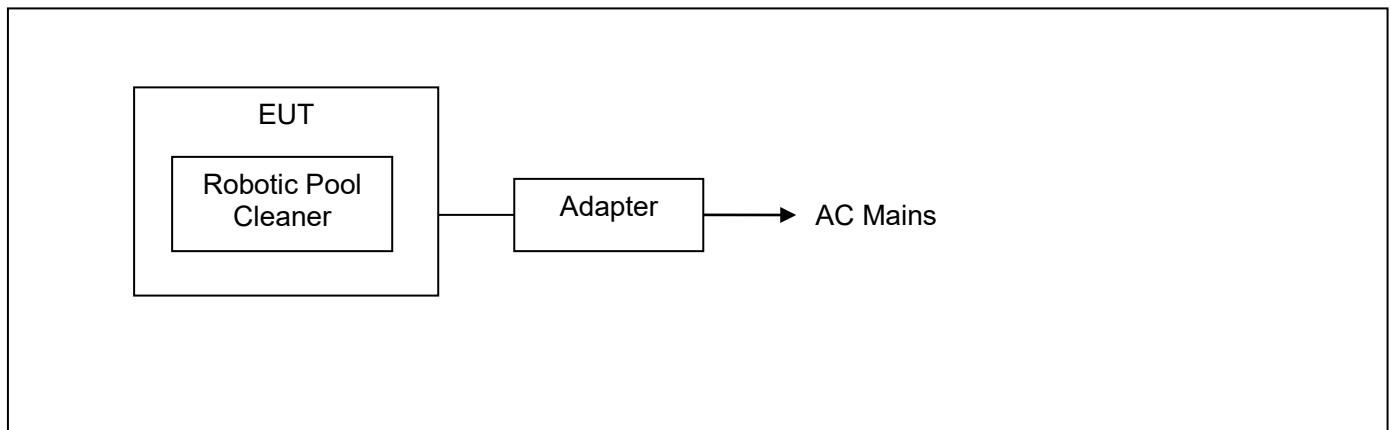

5. Modification of EUT

No modifications are made to the EUT during all test items.

6. Description of Support Device

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Brand	M/N	S/N	Specification	Remarks
1.	Robotic Pool Cleaner	MOVA	PIXZ6111	---	---	Provided by the Manufacturer.

Note: The support device was programmed a test firmware to make the EUT adjusting and keeping the charging power.

7. Test Facility and Location

Test Site	:	Dongguan Nore Testing Center Co., Ltd. (Dongguan NTC Co., Ltd.)
Accreditations and Authorizations	:	The Laboratory has been assessed and proved to be in compliance with CNAS/CL01 Listed by CNAS, August 13, 2018 The Certificate Registration Number is L5795. The Certificate is valid until August 13, 2030 The Laboratory has been assessed and proved to be in compliance with ISO17025 Listed by A2LA, November 01, 2017 The Certificate Registration Number is 4429.01 The Certificate is valid until December 31, 2027 Listed by FCC, November 06, 2017 Test Firm Registration Number: 907417 Listed by ISED, June 08, 2017 The Certificate Registration Number. Is 9743A The CAB identifier number: CN0015
Test Site Location	:	Room 101, 1101, Building 2, No. 61, Hongmei Section, Wangsha Road, Hongmei Town, Dongguan, Guangdong, People's Republic of China

8. Applicable Standards and References

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

Test Standards:

47 CFR Part 15, Subpart C

ANSI C63.10-2020+Cor 1-2023

References Test Guidance:

N/A

9. Deviations and Abnormalities from Standard Conditions

No additions, deviations and exclusions from the standard.

10. Test Conditions

No.	Test Item	Test Mode	Test Voltage	Tested by	Remarks
1.	AC Power Conducted Emission	1-3	AC 120V 60Hz AC 240V 50Hz	Sean Yuan	See note 1
2.	Radiated Emissions	1-3	AC 120V 60Hz AC 240V 50Hz	Sean Yuan	See note 1
3.	20dB Bandwidth	3	AC 120V 60Hz AC 240V 50Hz	Sean Yuan	See note 1
4.	Antenna Requirement	---	---	---	See note 1

Note:

- The testing climatic conditions for temperature, humidity, and atmospheric pressure are within: 15~35°C, 30~70%, 86~106kPa.
- AC 120V 60Hz and AC 240V 50Hz are from the adapter.
- For test modes, only the worst case was recorded in this report.

11. Measurement Uncertainty

No.	Test Item	Frequency	Uncertainty	Remarks
1.	Conducted Emission	150KHz ~ 30MHz	±2.46 dB	---
2.	Radiated Emission Test	9kHz ~ 30MHz	±5.63 dB	---
		30MHz ~ 1GHz	±5.63 dB	---
		1GHz ~ 18GHz	±5.16 dB	---
		18GHz ~ 40GHz	±5.16 dB	---
3.	Conducted Spurious Emissions	10Hz ~ 40GHz	±1.06 dB	---
4.	RF Output Power	10Hz ~ 40GHz	±1.08 dB	
5.	Power Spectral Density	10Hz ~ 40GHz	±1.06 dB	
6.	Occupied Channel Bandwidth	---	±1.06 %	---

Note:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The measurement uncertainty levels above are estimated and calculated according to CISPR 16-4-2.
3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

12. Sample Calculations

Conducted Emission						
Freq. (MHz)	Reading Level (dBUV)	Correct Factor (dB)	Measurement (dBUV)	Limit (dBUV)	Over (dB)	Detector
0.1500	35.52	9.98	45.50	65.57	-20.07	QP
Where, Freq. = Emission frequency in MHz Reading Level = Spectrum Analyzer/Receiver Reading Corrector Factor = Insertion loss of LISN + Cable Loss + RF Switching Unit attenuation Measurement = Reading + Corrector Factor Limit = Limit stated in standard Margin = Measurement - Limit Detector = Reading for Quasi-Peak / Average / Peak						

Radiated Spurious Emissions and Restricted Bands						
Freq. (MHz)	Reading Level (dBUV)	Correct Factor (dB/m)	Measurement (dBUV/m)	Limit (dBUV/m)	Over (dB)	Detector
43.5800	31.61	-6.81	24.80	40.00	-15.20	QP
Where, Freq. = Emission frequency in MHz Reading Level = Spectrum Analyzer/Receiver Reading Corrector Factor = Antenna Factor + Cable Loss - Pre-amplifier Measurement = Reading + Corrector Factor Limit = Limit stated in standard Over = Margin, which calculated by Measurement - Limit Detector = Reading for Quasi-Peak / Average / Peak						

Note: For all conducted test items, the spectrum analyzer offset or transducer is derived from RF cable loss and attenuator factor. The offset or transducer is equal to the RF cable loss plus attenuator factor.

13. Test Items and Results

13.1 Conducted Emissions Measurement


LIMITS

According to the requirements of FCC PART 15.207, the limits are as follows:

Frequency (MHz)	Quasi-peak	Average
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

Note: 1. If the limits for the average detector are met when using the quasi-peak detector, then the limits for the measurements with the average detector are considered to be met.
2. The lower limit shall apply at the transition frequencies.
3. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5MHz.

BLOCK DIAGRAM OF TEST SETUP

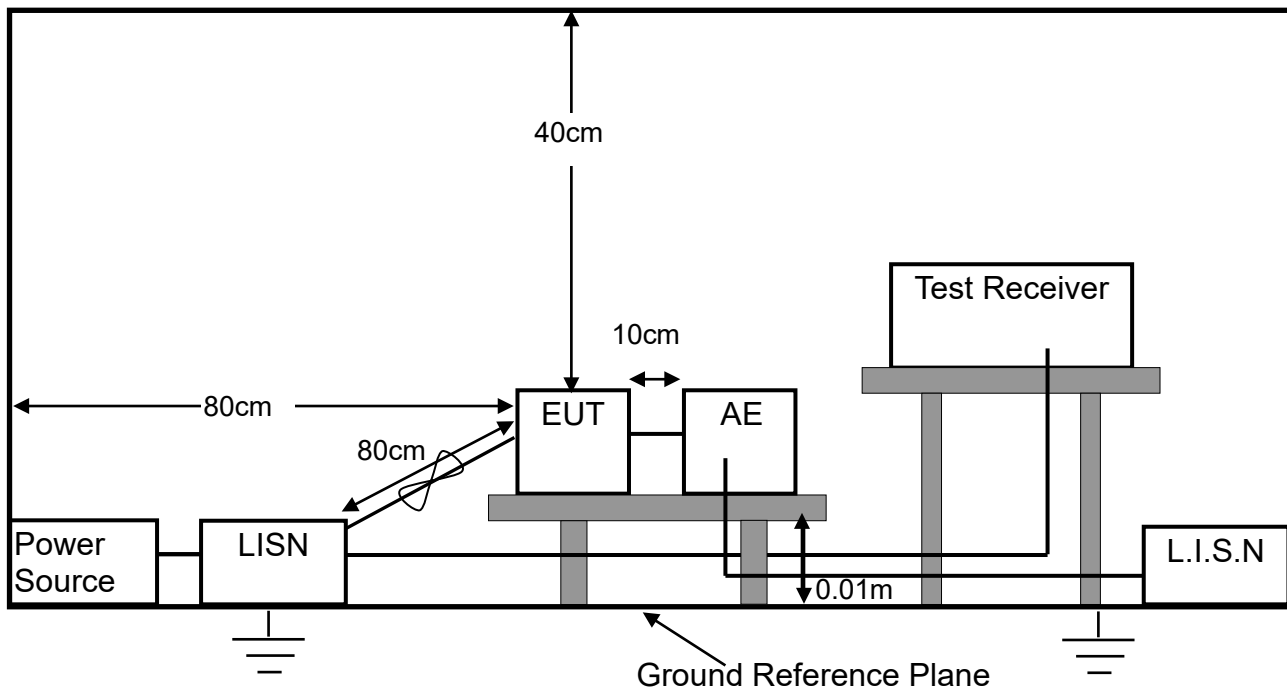

TEST PROCEDURES

- a. The EUT was placed on a wooden table 0.01m height from the metal ground plan and 0.4m from the conducting wall of the shielding room and it was kept at 0.8m from any other grounded conducting surface.
- b. All I/O cables and support devices were positioned as per ANSI C63.10.
- c. Connect mains power port of the EUT to a line impedance stabilization network (LISN).
- d. Connect all support devices to the other LISN and AAN, if needed.
- e. Scan the frequency range from 150KHz to 30MHz at both sides of AC line for maximum conducted interference checking and record the test data.

TEST RESULTS

PASS

Please refer to the following pages of the worst case.

M/N: AD1

Testing Voltage: AC 120V / 60Hz

Phase: L1


Detector: QP & AVG

Test Mode: 2

Conducted Emission Measurement

Date: 2026/3/16

Time: 11:35:00

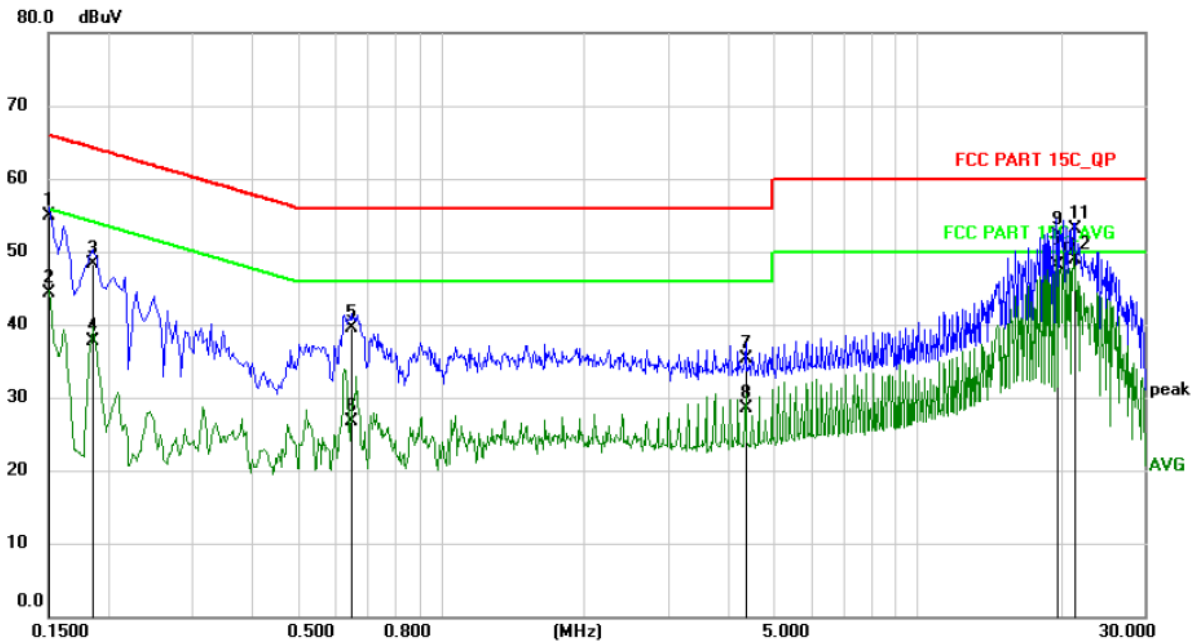


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.1500	35.24	19.76	55.00	66.00	-11.00	QP	
2	0.1500	24.54	19.76	44.30	56.00	-11.70	AVG	
3	0.1859	28.54	19.76	48.30	64.22	-15.92	QP	
4	0.1859	17.94	19.76	37.70	54.22	-16.52	AVG	
5	0.6500	19.78	19.72	39.50	56.00	-16.50	QP	
6	0.6500	7.08	19.72	26.80	46.00	-19.20	AVG	
7	4.3619	15.66	19.74	35.40	56.00	-20.60	QP	
8	4.3619	8.76	19.74	28.50	46.00	-17.50	AVG	
9	19.5579	32.35	20.05	52.40	60.00	-7.60	QP	
10	19.5579	28.15	20.05	48.20	50.00	-1.80	AVG	
11	21.3659	33.14	20.06	53.20	60.00	-6.80	QP	
12 *	21.3659	28.94	20.06	49.00	50.00	-1.00	AVG	

M/N: AD1	Testing Voltage: AC 120V / 60Hz
Phase: N	Detector: QP & AVG
Test Mode: 2	

Conducted Emission Measurement

Date: 2026/3/16

Time: 11:41:32

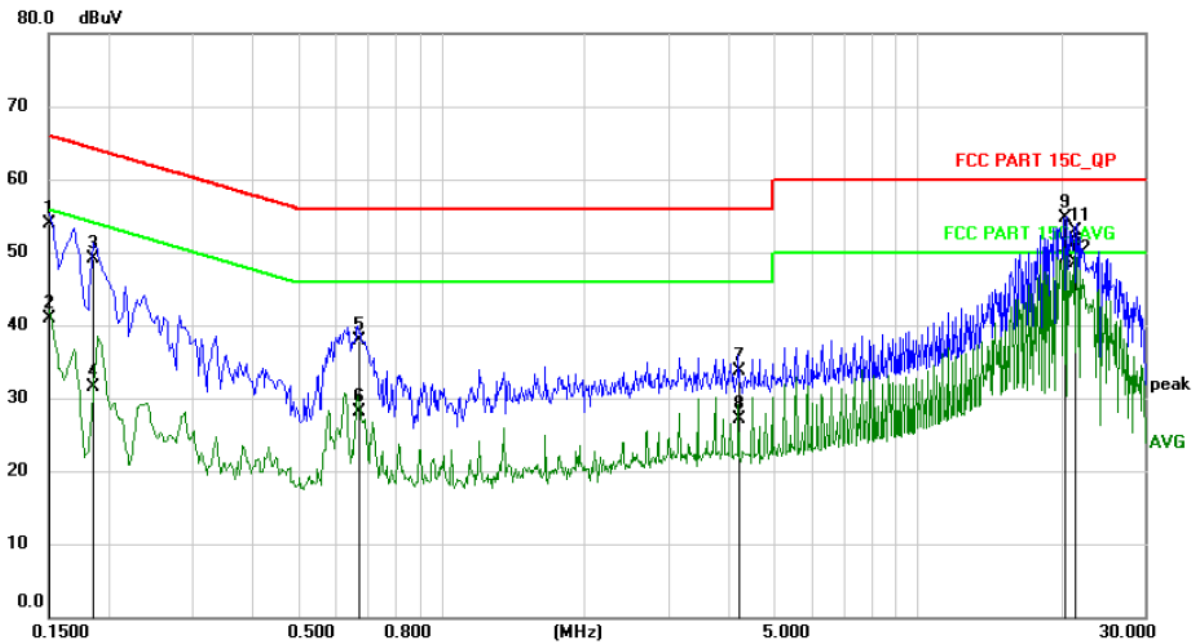

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.1500	34.28	19.72	54.00	66.00	-12.00	QP	
2	0.1500	21.28	19.72	41.00	56.00	-15.00	AVG	
3	0.1859	29.48	19.72	49.20	64.22	-15.02	QP	
4	0.1859	11.88	19.72	31.60	54.22	-22.62	AVG	
5	0.6700	18.21	19.69	37.90	56.00	-18.10	QP	
6	0.6700	8.51	19.69	28.20	46.00	-17.80	AVG	
7	4.2100	14.09	19.71	33.80	56.00	-22.20	QP	
8	4.2100	7.39	19.71	27.10	46.00	-18.90	AVG	
9	20.3060	34.70	20.00	54.70	60.00	-5.30	QP	
10 *	20.3060	29.10	20.00	49.10	50.00	-0.90	AVG	
11	21.3580	33.01	19.99	53.00	60.00	-7.00	QP	
12	21.3580	28.51	19.99	48.50	50.00	-1.50	AVG	

13.2 Radiated Spurious Emissions and Restricted Bands Measurement


LIMITS

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)	
		$\mu\text{V/m}$	
0.009 ~ 0.490	300	2400/F(kHz)	
0.490 ~ 1.705	30	24000/F(kHz)	
1.705 ~ 30	30	30	
30 ~ 88	3	100	
88 ~ 216	3	150	
216 ~ 960	3	200	
Above 960	3	500	
Frequency range MHz	Distance Meters	Field Strengths Limit (15.249)	
		mV/m (Field strength of fundamental)	$\mu\text{V/m}$ (Field strength of Harmonics)
902 ~ 928	3	50	500
2400 ~ 2483.5	3	50	500
5725 ~ 5875	3	50	500
24000 ~ 2425000	3	250	2500


- Remark: (1) Emission level (dB) μV = 20 log Emission level $\mu\text{V/m}$
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
- (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
- (5) §15.249(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.

BLOCK DIAGRAM OF TEST SETUP


For Radiated Emission below 30MHz

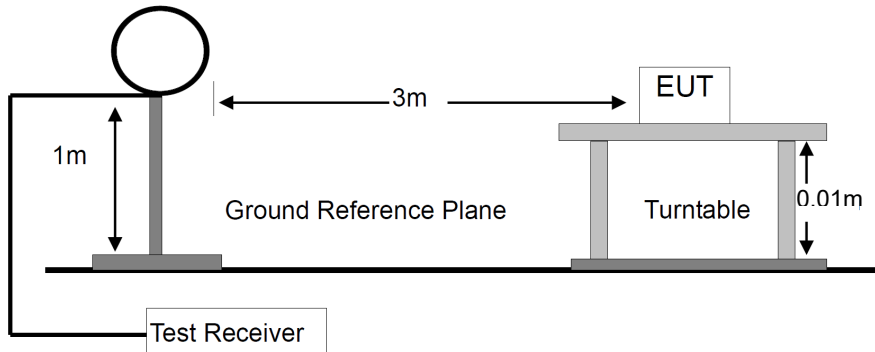

For Radiated Emission 30-1000MHz

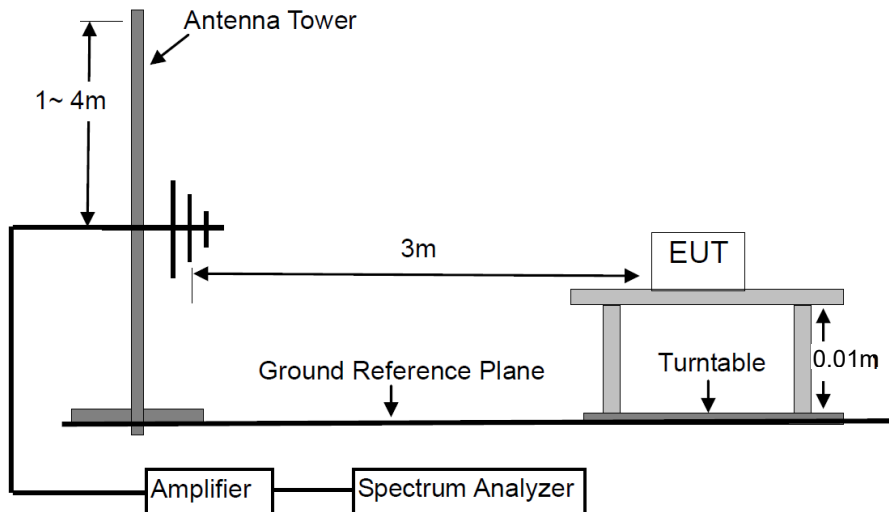

For Radiated Emission Above 1000MHz.

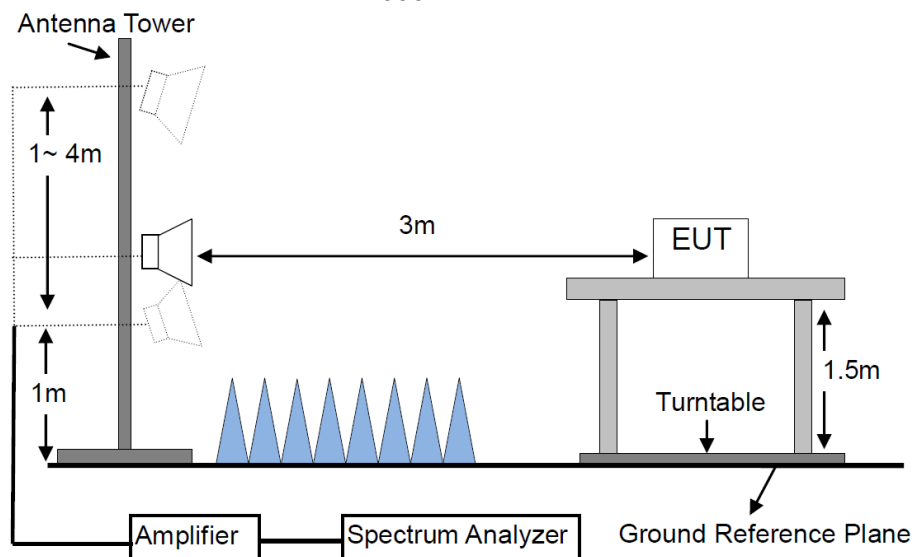

TEST PROCEDURES

- a. Below 1GHz, the EUT was placed on the top of a rotating table 0.01 meters above the ground at a 3 meter semi- anechoic chamber room.
- b. For the radiated emission test above 1GHz:
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- f. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band	Detector	Resolution Bandwidth	Video Bandwidth
9KHz-90KHz	AVG	300Hz	1KHz
91KHz-109KHz	QP	300Hz	1KHz
110KHz-490KHz	AVG	300Hz/ 9KHz	1KHz /30KHz
150KHz-30MHz	QP	10KHz	30KHz
30MHz-1000MHz	QP	120KHz	300KHz
Above 1000MHz	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

TEST RESULTS

PASS


Please refer to the following pages of the worst case.

M/N: AD1	Testing Voltage: AC 240V / 50Hz
Polarization: Horizontal	Detector: QP
Test Mode: 1	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/16

Time: 17:18:24

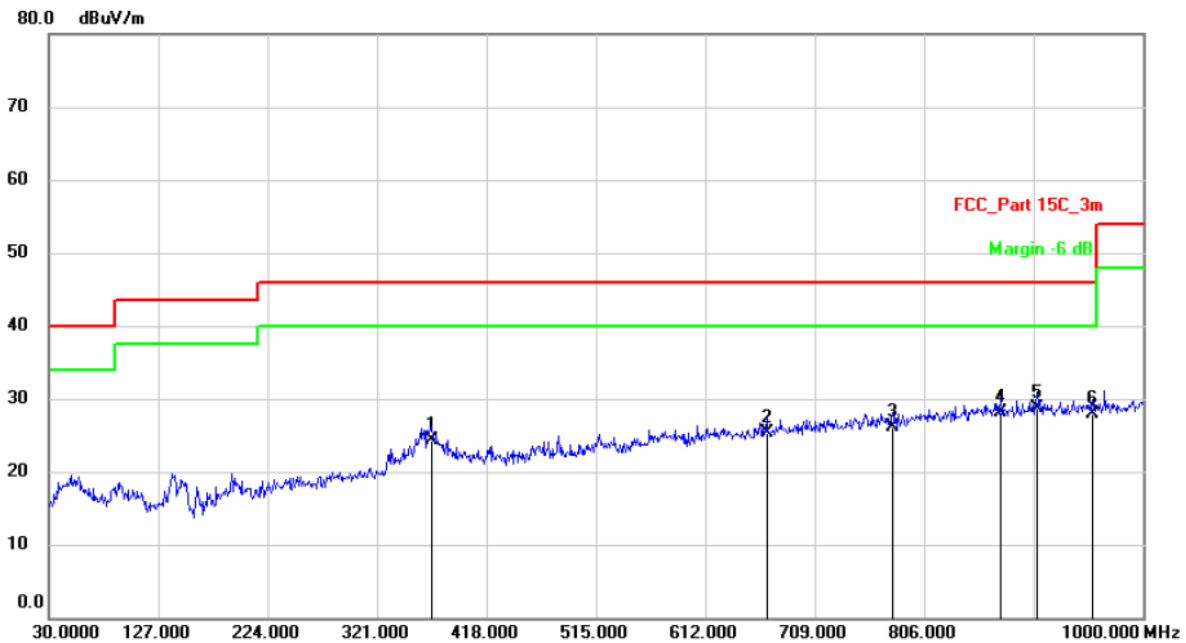


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		369.5000	29.45	-5.05	24.40	46.00	-21.60	QP
2		666.3200	24.76	0.64	25.40	46.00	-20.60	QP
3		777.8700	23.66	2.44	26.10	46.00	-19.90	QP
4		873.9000	24.39	3.81	28.20	46.00	-17.80	QP
5	*	905.9100	24.78	4.02	28.80	46.00	-17.20	QP
6		955.3800	23.65	4.25	27.90	46.00	-18.10	QP

M/N: AD1	Testing Voltage: AC 240V / 50Hz
Polarization: Vertical	Detector: QP
Test Mode: 1	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/16

Time: 17:11:15

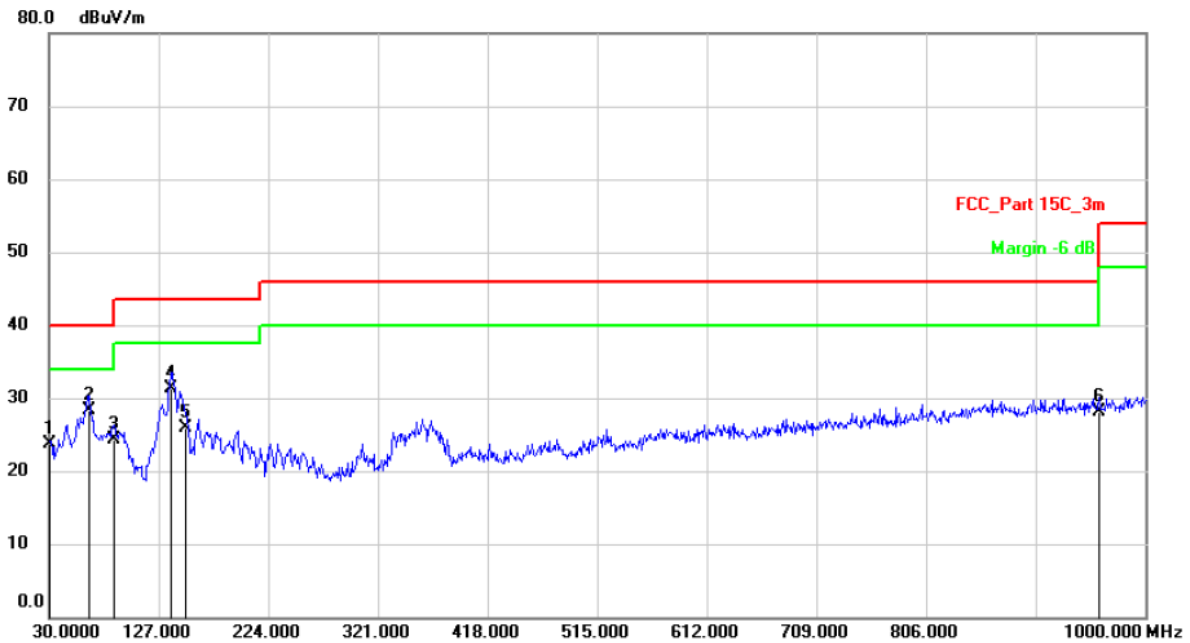


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
1		30.0000	34.40	-10.60	23.80	40.00	-16.20	QP	
2	*	64.9200	38.13	-9.73	28.40	40.00	-11.60	QP	
3		87.2300	36.29	-11.99	24.30	40.00	-15.70	QP	
4		137.6700	44.17	-12.77	31.40	43.50	-12.10	QP	
5		151.2500	38.66	-12.66	26.00	43.50	-17.50	QP	
6		959.2600	23.83	4.27	28.10	46.00	-17.90	QP	

M/N: AD1	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: QP
Test Mode: 1	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/23

Time: 21:07:46

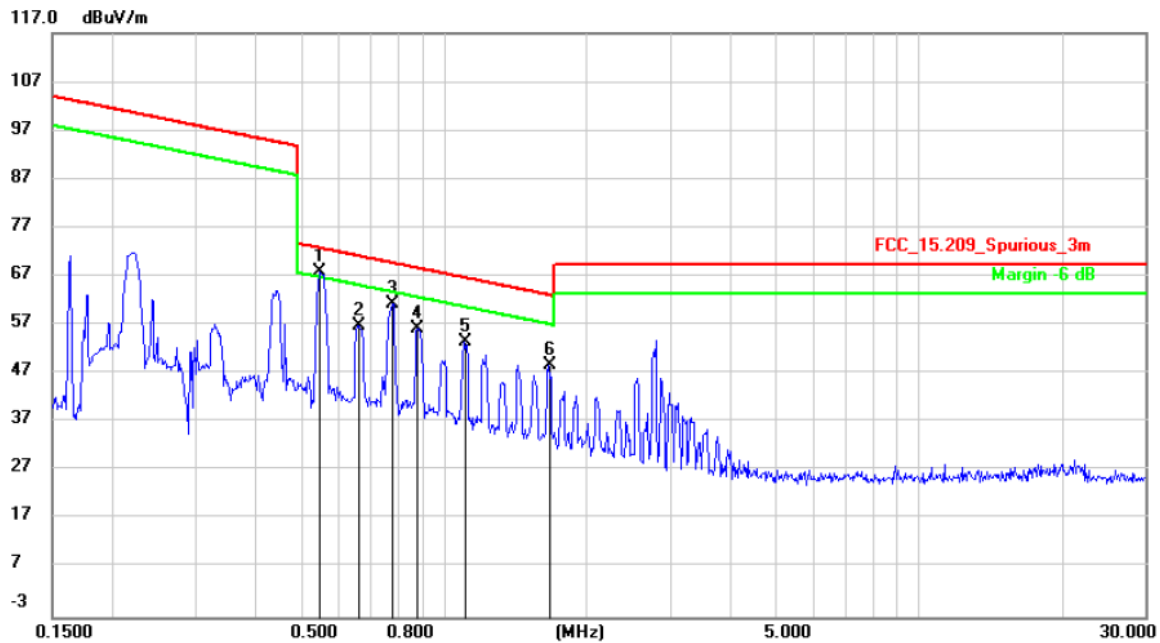

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.5493	47.41	20.40	67.81	72.81	-5.00	QP	
2		0.6578	36.45	20.40	56.85	71.24	-14.39	QP	
3		0.7793	41.05	20.38	61.43	69.77	-8.34	QP	
4		0.8803	35.96	20.38	56.34	68.71	-12.37	QP	
5		1.1056	33.08	20.38	53.46	66.73	-13.27	QP	
6		1.6625	28.49	20.39	48.88	63.19	-14.31	QP	

M/N: AD1

Testing Voltage: AC 120V / 60Hz

Polarization: Vertical

Detector: QP


Test Mode: 1

Distance: 3m

Radiated Emission Measurement

Date: 2026/3/23

Time: 21:14:45

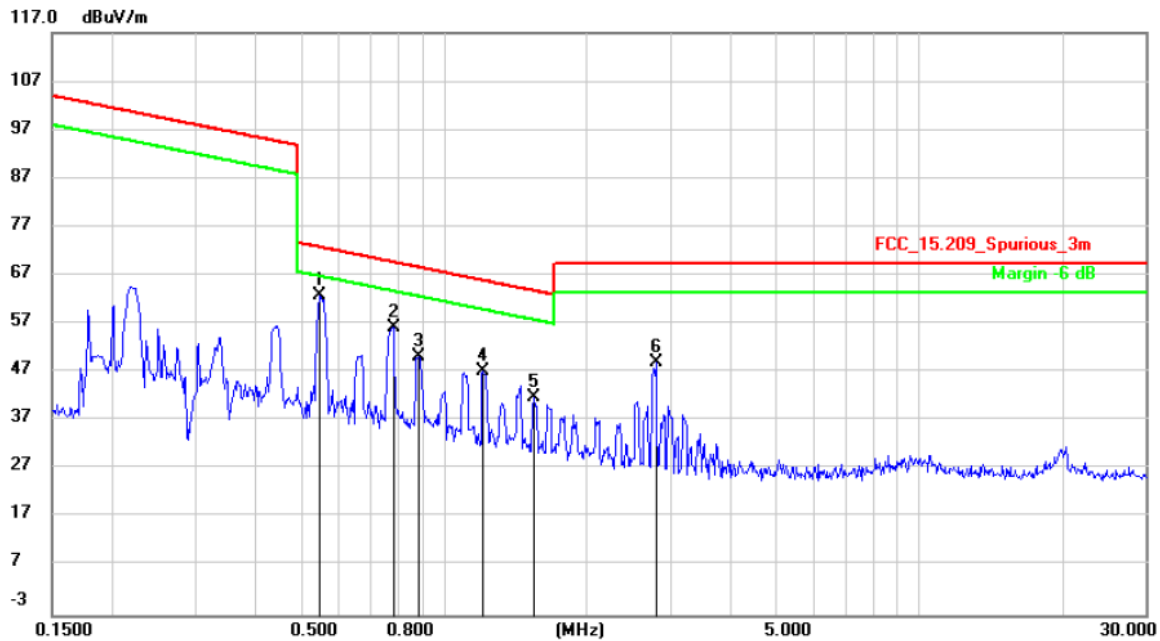


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.5493	42.36	20.40	62.76	72.81	-10.05	QP	
2		0.7833	35.84	20.38	56.22	69.73	-13.51	QP	
3		0.8849	29.85	20.38	50.23	68.67	-18.44	QP	
4		1.2096	26.96	20.38	47.34	65.95	-18.61	QP	
5		1.5518	21.41	20.39	41.80	63.79	-21.99	QP	
6		2.7942	28.68	20.40	49.08	69.50	-20.42	QP	

M/N: AD1	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: AVG
Test Mode: 1	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/23

Time: 21:00:08

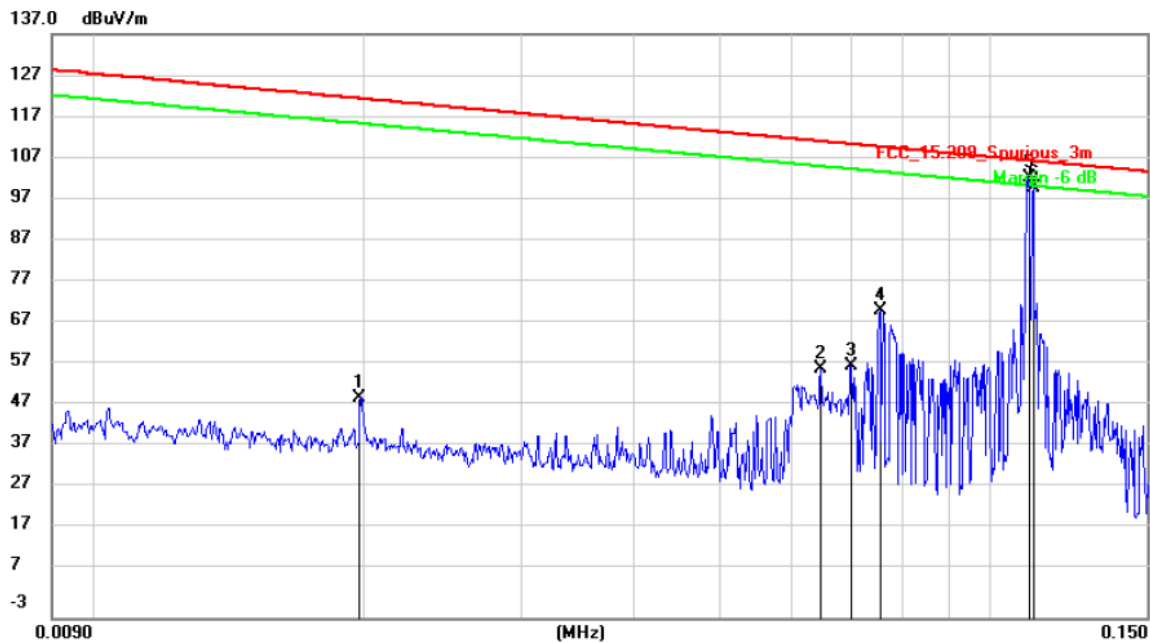

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.0198	29.54	20.22	49.76	121.52	-71.76	AVG	
2		0.0648	36.35	20.45	56.80	111.27	-54.47	AVG	
3		0.0701	36.95	20.45	57.40	110.60	-53.20	AVG	
4		0.0755	50.06	20.46	70.52	109.95	-39.43	AVG	
5	*	0.1110	81.96	20.47	102.43	106.63	-4.20	AVG	
6		0.1119	79.57	20.47	100.04	106.56	-6.52	AVG	


M/N: AD1	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: AVG
Test Mode: 1	Distance: 3m

Radiated Emission Measurement

Date: 2026/3/23

Time: 21:21:31

137.0 dBuV/m

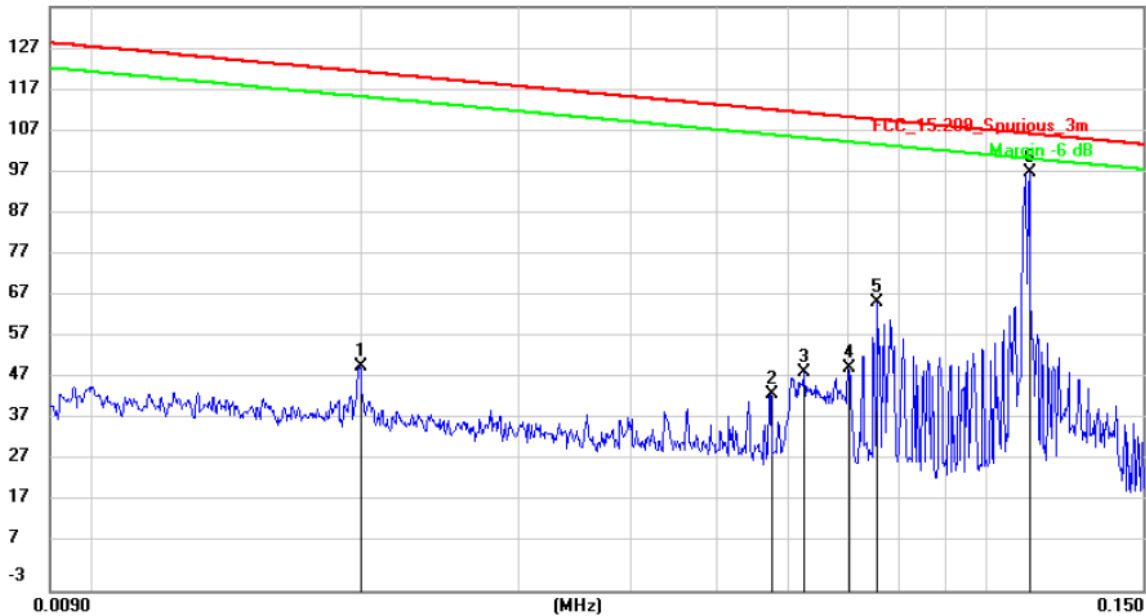


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		0.0200	30.54	20.23	50.77	121.43	-70.66	AVG	
2		0.0575	23.60	20.49	44.09	112.31	-68.22	AVG	
3		0.0627	28.98	20.46	49.44	111.56	-62.12	AVG	
4		0.0702	29.97	20.45	50.42	110.58	-60.16	AVG	
5		0.0757	45.63	20.46	66.09	109.93	-43.84	AVG	
6	*	0.1119	76.86	20.47	97.33	106.56	-9.23	AVG	

13.3 20dB Bandwidth Measurement

LIMITS

There is no limit.

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

The 20dB bandwidth of the emission was contained within the frequency band designated which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered, FCC Rule 15.35:


The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the tested channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

TEST RESULTS

PASS

Please refer to the following table.

ASK		
Frequency (KHz)	20dB Bandwidth (Hz)	Result
110.779	205.5	PASS

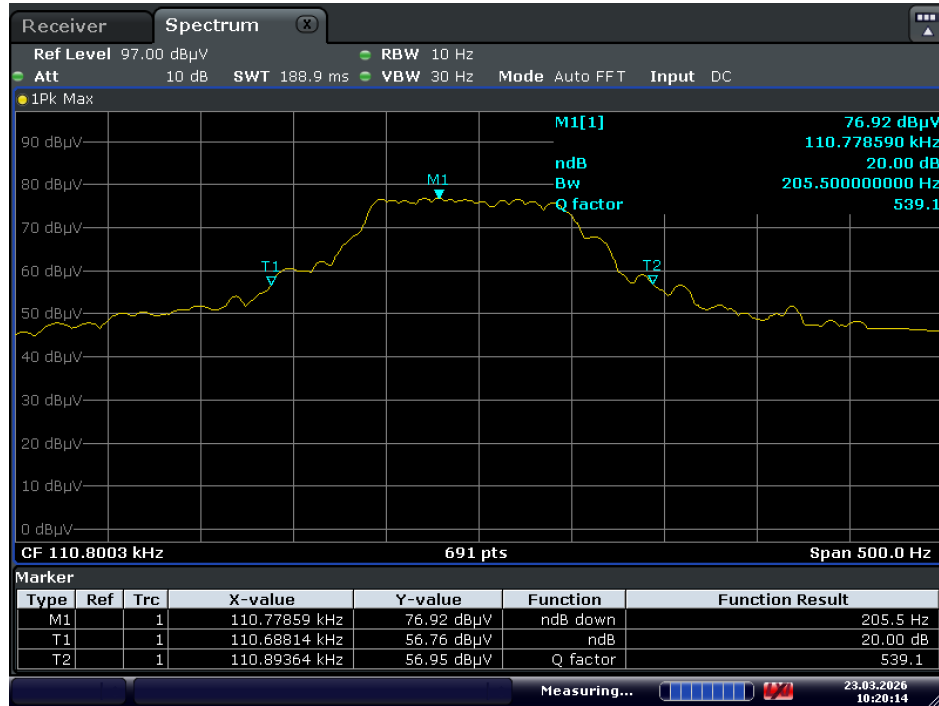

Date: 23.MAR.2026 10:20:14

13.4 Antenna Requirement

STANDARD APPLICABLE

According to of FCC part 15C section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

ANTENNA CONNECTED CONSTRUCTION

The antenna is coil antenna that no antenna other than furnished by the responsible party shall be used with the device. Therefore, the antenna is considered meet the requirement.

14. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	101152	Aug. 21, 2025	1 Year
2.	L.I.S.N	Rohde & Schwarz	ENV 216	101317	Aug. 21, 2025	1 Year
3.	L.I.S.N	Schwarzbeck	NNLK8129	00558	Aug. 23, 2025	1 Year
4.	RF Switching Unit	Compliance Direction Systems Inc.	RSU-M2	38311	Aug. 21, 2025	1 Year
5.	Test Receiver	Rohde & Schwarz	ESCI7	100837	Aug. 21, 2025	1 Year
6.	Spectrum Analyzer	Keysight	N9020A	MY50510314	Aug. 21, 2025	1 Year
7.	Spectrum Analyzer	Keysight	N9020A	MY54200831	Aug. 22, 2025	1 Year
8.	Spectrum Analyzer	Keysight	N9010B	MY62170254	Aug. 21, 2025	1 Year
9.	Antenna	Schwarzbeck	VULB9163	01552	Aug. 16, 2025	2 Year
10.	Loop Antenna	Schwarzbeck	FMZB 1513	1513-272	Aug. 16, 2025	2 Year
11.	Horn Antenna	COM-Power	AH-118	071078	Aug. 16, 2025	2 Year
12.	Pre-Amplifier	HP	HP 8447D	1145A00203	Aug. 21, 2025	1 Year
13.	Pre-Amplifier	HP	HP 8449B	3008A00964	Aug. 23, 2025	1 Year
14.	Communication Tester	Rohde & Schwarz	CMW500	109851	Aug. 28, 2025	1 Year
15.	Power Sensor	DARE	RPR3006W	15I00041SNO 64	Aug. 28, 2025	1 Year
16.	Horn Antenna	COM-Power	AH-840	10100020	Aug. 28, 2025	2 Year
17.	Temperature & Humidity Chamber	Wanshun	SS-HWHS-80	N/A	Aug. 09, 2025	1 Year
18.	DC Source	ZHAOXIN	KXN305D	N/A	Aug. 23, 2025	1 Year
19.	Temporary antenna connector	TESCOM	SS402	N/A	N/A	N/A
20.	Chamber	YIHENG	9*6*6m	N/A	Sep. 22, 2025	2 Year
21.	Test Software	MWRF	MTS 8310, V2.0.0.0	N/A	N/A	N/A
22.	Test Software	EZ	EZ EMC, NTC-3A1.1	N/A	N/A	N/A

Note: For photographs of EUT and measurement, please refer to appendix in separate documents.

---End---