



Shenzhen Huaxin Information Technology Service Co., Ltd

101, R & D Building, No.3 guansheng 4th Road, Luhua Community, Guanhu Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-21018313 Http: //www.tecovo.net

TEST REPORT

Report No.: **HX260414R004**

FCC ID.....: **2BVRG-JQ-DCU-B01**

Applicant.....: **Chongqing Jiuqi Technology Co., Ltd**

Address.....: No. 21-2, Building 1, No. 155 Yushong West Road, Longshan Subdistrict, Liangjiang New District, Chongqing, China

Manufacturer.....: Chongqing Jiuqi Technology Co., Ltd

Address.....: No. 21-2, Building 1, No. 155 Yushong West Road, Longshan Subdistrict, Liangjiang New District, Chongqing, China

Product Name.....: **Type B concentrator**

Trade Mark.....: Chongqing Jiuqi Technology

Model/Type reference.....: JQ-DCU-EM32-B01

Listed Model(s): /

Standard.....: **CFR47 PART 22H, 27**

Date of receipt of test sample...: Jan. 11, 2025

Date of testing.....: Jan. 12, 2026 ~ Apr. 23, 2026

Date of issue.....: Apr. 24, 2026

Result.....: **PASS**

Compiled by:

(Printed name + signature)

Terry Su



Approved by:

(Printed name + signature)

Amy Zhai

Testing Laboratory Name.....: **Shenzhen Huaxin Information Technology Service Co., Ltd**

Address.....: 101, R & D Building, No.3 guansheng 4th Road, Luhua Community, Guanhu Street, Longhua District, Shenzhen, Guangdong, China

This test report shall not be copied in any form except with the written approval of our laboratory. The customer shall not claim that the product has been endorsed by Shenzhen Huaxin Information Technology Service Co., Ltd. based on this report, The test results in the report are only applicable to the samples tested. Without the signatures of the compiled engineer and the approver, the test report will be invalid. Any objection shall be submitted to Shenzhen Huaxin Information Technology Service Co., Ltd. within 15 days from the date of receiving the report. After this period, it will not be considered. The test report only corresponds to the test sample.



Table of Contents

Page

1. SUMMARY	3
1.1. TEST STANDARDS	3
1.2. REPORT VERSION	3
1.3. TEST DESCRIPTION	4
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY	6
1.6. ENVIRONMENTAL CONDITIONS	6
2. GENERAL INFORMATION	7
2.1. CLIENT INFORMATION	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY	8
2.4. MEASUREMENT INSTRUMENTS LIST	9
3. TEST ITEM AND RESULTS	10
3.1. CONDUCTED OUTPUT POWER	10
3.2. PEAK-TO-AVERAGE RATIO	11
3.3. OCCUPY BANDWIDTH	12
3.4. OUT OF BAND EMISSION AT ANTENNA TERMINALS	13
3.5. BAND EDGE COMPLIANCE	14
3.6. RADIATED POWER MEASUREMENT	16
3.7. RADIATED SPURIOUS EMISSION	21
3.8. FREQUENCY STABILITY	26



1. SUMMARY

1.1. Test Standards

[FCC Rules Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
[FCC Rules Part 22](#): PRIVATE LAND MOBILE RADIO SERVICES.
[FCC Part 22 Subpart H](#): Cellular Radiotelephone Service.
[FCC Rules Part 27](#): MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES
[ANSI C63.26- 2015](#): American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
[KDB 971168 D01 Power Meas License Digital Systems v03](#): MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

1.2. Report version

Revised No.	Date of issue	Description
01	Apr. 24, 2026	Original



1.3. Test Description

Test Item	Section in CFR 47	Result	Test Engineer
Conducted Output Power	Part 2.1046 Part 22.913(a) Part 27.50	Pass	Sain Liao
Peak-to-Average Ratio	Part 27.50	Pass	Sain Liao
99% Occupied Bandwidth & 26 dB Bandwidth	Part 2.1049 Part 22.917(b) Part 27.53	Pass	Sain Liao
Band Edge	Part 2.1051 Part 22.917 Part 27.53	Pass	Sain Liao
Conducted Spurious Emissions	Part 2.1051 Part 22.917 Part 27.53	Pass	Sain Liao
Frequency stability VS Temperature	Part 2.1055(a)(1)(b) Part 22.355 Part 27.54	Pass	Sain Liao
Frequency stability VS Voltage	Part 2.1055(d)(1)(2) Part 22.355 Part 27.54	Pass	Sain Liao
ERP and EIRP	Part 22.913(a) Part 27.50	Pass	Sain Liao
Radiated Spurious Emissions	Part 2.1053 Part 22.917 Part 27.53	Pass	Sain Liao

Note: N/A: Not Applicable

The measurement uncertainty is not included in the test result.



1.4. Test Facility

Shenzhen Huaxin Information Technology Service Co., Ltd

Add: 101, R & D Building, No.3 guansheng 4th Road, Luhua Community, Guanhu Street, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 6855.01

Shenzhen Huaxin Information Technology Service Co., Ltd EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Company Number: 31786, CAB Identifier: CN0147)

Shenzhen Huaxin Information Technology Service Co., Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 31786.

FCC (Registration No.: 932271, Designation Number CN1344)

Shenzhen Huaxin Information Technology Service Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC)Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration NO.: 932271.



1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huaxin Information Technology Service Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for Shenzhen Huaxin Information Technology Service Co., Ltd

Test Items	Measurement Uncertainty	Notes
Frequency stability	$\pm 2.76\%$	(1)
Transmitter power conducted	0.57dB	(1)
Transmitter power Radiated	2.20dB	(1)
Conducted spurious emission 9KHz-12.75 GHz	$\pm 1.40\text{dB}$	(1)
Conducted Emission 9KHz-30MHz	$\pm 3.10\text{dB}$	(1)
Radiated Emission 30~1000MHz	$\pm 4.63\text{dB}$	(1)
Radiated Emission 1~18GHz	$\pm 4.40\text{dB}$	(1)
Radiated Emission 18-40GHz	$\pm 4.40\text{dB}$	(1)
Occupied Bandwidth	-----	(1)
Emission Mask	-----	(1)
Modulation Characteristic	-----	(1)
Transmitter Frequency Behavior	-----	(1)

Note: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	20°C-25°C
Relative Humidity:	50 %-55 %
Air Pressure:	101kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Chongqing Jiuqi Technology Co., Ltd
Address:	No. 21-2, Building 1, No. 155 Yushong West Road, Longshan Subdistrict, Liangjiang New District, Chongqing, China
Manufacturer:	Chongqing Jiuqi Technology Co., Ltd
Address:	No. 21-2, Building 1, No. 155 Yushong West Road, Longshan Subdistrict, Liangjiang New District, Chongqing, China

2.2. General Description of EUT

Product Name:	Type B concentrator
Trade Mark:	Chongqing Jiuqi Technology
Model/Type reference:	JQ-DCU-EM32-B01
Listed Model(s):	/
Power supply:	12V=2A from AC/DC Adapter
Adapter Model:	SG-120200024A Input: 100-240V~ 50/60Hz 0.6A Max Output: 12V=2A
Hardware version:	/
Software version:	/
LTE	
Operation Band:	FDD Band 5: UL: 824.7MHz~848.3MHz, DL: 869.7MHz~893.3MHz TDD Band 41: UL: 2498.5MHz~2687.5MHz, DL: 2498.5MHz~2687.5MHz
Modulation Type:	QPSK, 16QAM
Antenna Type:	External Antenna
Antenna Gain:	FDD Band 5: 1.95dBi Max TDD Band 41: 0.87dBi Max



2.3. Description of Test Modes and Test Frequency

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing.

Test Frequency:

FDD Band 5

Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
Low Range	1.4	20407	824.7	2407	869.7
	3	20415	825.5	2415	870.5
	5	20425	826.5	2425	871.5
	10 ^[1]	20450	829	2450	874
Mid Range	1.4/3/5 10 ^[1]	20525	836.5	2525	881.5
High Range	1.4	20643	848.3	2643	893.3
	3	20635	847.5	2635	892.5
	5	20625	846.5	2625	891.5
	10 ^[1]	20600	844	2600	889
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.					

TDD Band 41

Test Frequency ID	Bandwidth [MHz]	EARFCN	Frequency (UL and DL) [MHz]
Low Range	5	39675	2498.5
	10	39700	2501
	15	39725	2503.5
	20	39750	2506
Mid Range	5/10/15/20	40620	2593
High Range	5	41565	2687.5
	10	41540	2685
	15	41515	2682.5
	20	41490	2680



2.4. Measurement Instruments List

RF Test System - SRD					
Item	Test Equipment	Manufacturer	Model No.	Versions/ Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY51280803	Apr. 08, 2027
2	Wideband Radio Communication Tester	R&S	CMW500	157763	Apr. 08, 2027
3	MXG Vector Signal Generator	Agilent	N5182A	101795	Apr. 08, 2027
4	EXG Analog Signal Generator	Agilent	N5181A	MY47421151	Apr. 08, 2027
5	RF Sensor Unit	Techy	TR1029-2	20220428P009	Apr. 08, 2027
6	High and low temperature test chamber	Asprey	LX-225L	2020091401	Apr. 08, 2027
7	SRD Test Software	TACHOY	RTS	V1.0.0	/
8	2G/3G/4G Test Software	TST	TST-PASS	V2.0	/

Radiated emission					
Item	Test Equipment	Manufacturer	Model No.	Versions/ Serial No.	Calibrated until
1	EMI spectrum receiver	R&S	ESR7	102543	Apr. 09, 2027
2	9*6*6 anechoic chamber	Mao Rui	9*6*6	/	Apr. 09, 2028
3	Spectrum analyzer	R&S	FSV40-N	101795	Apr. 09, 2027
4	Preamplifier	Agilent	8449B	3008A00551	Apr. 08, 2027
5	Preamplifier	HP	8447D	1616A02061	Apr. 09, 2027
6	Horn Antenna	A. H. System, Inc	SAS-571	915	Apr. 10, 2028
7	Horn Antenna	A. H. System, Inc	SAS-571	918	Apr. 10, 2028
8	Trilog-Broadband Antenna	SCHWARZBEC K	VULB 9168	01318	Apr. 10, 2028
9	Trilog-Broadband Antenna	SCHWARZBEC K	VULB 9168	01356	Apr. 10, 2028
10	6dB Fixed Attenuator	SKET	AP_DC01G-2W-N-6 dB	SK2021012803	Apr. 08, 2027
11	Test Software	SKET	EMC-I	V1.4.0.1	/
12	Wideband Radio Communication Tester	R&S	CMW500	157763	Apr. 08, 2027

Note: 1. The Cal. Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.



3. TEST ITEM AND RESULTS

3.1. Conducted Output Power

LIMIT

Conducted Output Power: N/A

TEST CONFIGURATION

- For Conducted output Power



Note: Measurement setup for testing on Antenna connector

TEST PROCEDURE

- For Conducted output Power
 1. The transmitter output port was connected to base station.
 2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
 3. Set EUT at maximum power through base station.
 4. Select lowest, middle, and highest channels for each band and different modulation.
 5. Measure the maximum PK burst power and maximum Avg. burst power.

TEST RESULTS

Please see the appendix for every tested band.




3.2. Peak-to-Average Ratio

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13dB.

TEST CONFIGURATION

- For Peak-to-Average Ratio

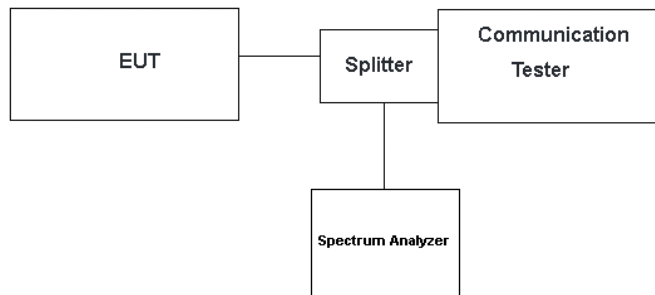

TEST PROCEDURE

- For Peak-to-Average Ratio
 1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
 2. The EUT was connected to spectrum and communication tester via a splitter
 3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
 6. Record the deviation as Peak to Average Ratio.


TEST RESULTS

Please see the appendix for every tested band.



3.3. Occupy Bandwidth

TEST CONFIGURATION

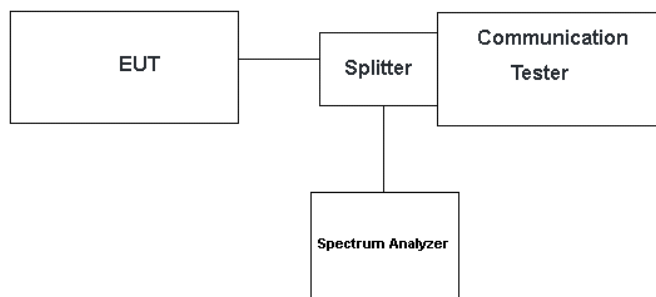

TEST PROCEDURE

1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer
2. RBW was set to about 1% of emission BW, $VBW \geq 3$ times RBW.
3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Please see the appendix for every tested band.



3.4. Out of band emission at antenna terminals

LIMIT

§ 22.917, §24.238, §27.53 (c), (g), (h), §90.691, §90.543 (Band 14)

The minimum permissible attenuation level of any spurious emissions is $43 + 10 \log (P)$ dB where transmitting power (P) in Watts.

§ 27.53 (a) (Band 30, 40)

The minimum permissible attenuation level of any spurious emissions is $70 + 10 \log (P)$ dB where transmitting power (P) in Watts.

§ 27.53 (m) (Band 7, 41)


The minimum permissible attenuation level of any spurious emissions is $55 + 10 \log (P)$ dB where transmitting power (P) in Watts.

§ 96.41

(e) 3.5 GHz Emissions and Interference Limits—

(2) Additional protection levels. Notwithstanding paragraph (d)(1) of this section, the conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz .

TEST CONFIGURATION

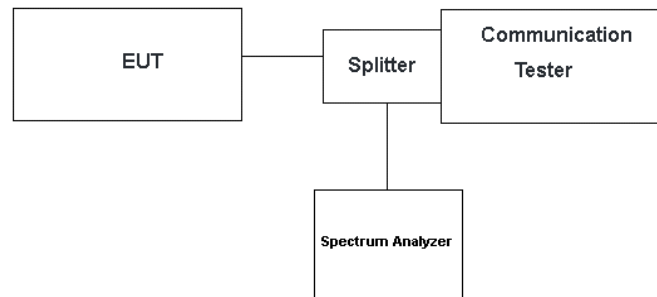

TEST PROCEDURE

1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
2. The resolution bandwidth of the spectrum analyzer was set at 1MHz; sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.
3. For the out of band: Set the RBW = 1MHz VBW ≥ 3 times RBW, Start=30MHz, Stop= 10th harmonic.

TEST RESULTS

Please see the appendix for every tested band.



3.5. Band Edge compliance

LIMIT

§ 22.917, §24.238, §27.53(h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the

transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

§ 90.691 Emission mask requirements for EA-based systems.

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum

adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any

emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10$

$\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of

the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission

shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels,

whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in

kilohertz and where f is greater than 37.5 kHz.

§ 27.53 (Band 30)

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed

only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

§ 27.53 (Band 13)

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should

be adjusted to indicate spectral energy in a 6.25 kHz segment.



(f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals. (-70 dBW/MHz = -40 dBm/MHz).

§ 27.53 (Band 12, 17, 71)

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

§ 27.53 (Band 7, 41)

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph

(m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

FCC: §96.41


(e) 3.5 GHz Emissions and Interference Limits—(1) General protection levels. Except as otherwise specified in paragraph

(e)(2) of this section, for channel and frequency assignments made by the SAS to CBSDs, the conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0-10 megahertz above the upper SAS-assigned channel edge and within 0-10 megahertz below the lower SAS assigned channel edge. At all frequencies greater than 10 megahertz above the upper SAS assigned channel edge and

less than 10 MHz below the lower SAS assigned channel edge, the conducted power of any emission shall not exceed -25 dBm/MHz. The upper and lower SAS assigned channel edges are the upper and lower limits of any channel assigned to a CBSD by an SAS, or in the case of multiple contiguous channels, the upper and lower limits of the combined contiguous channels.

(2) Additional protection levels. Notwithstanding paragraph (d)(1) of this section, the conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

TEST CONFIGURATION

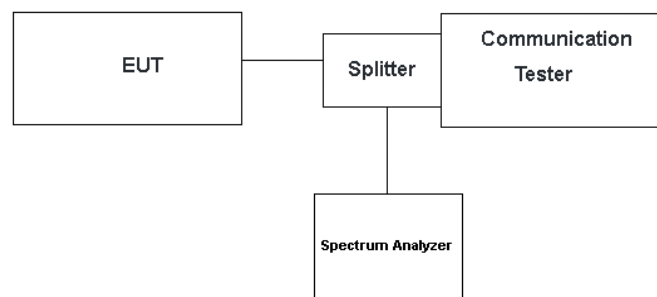

TEST PROCEDURE

1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
2. RBW was set to about 1% of emission BW, $VBW \geq 3$ times RBW.

TEST RESULTS

Please see the appendix for every tested band.

3.6. Radiated Power Measurement

LIMIT


LTE FDD Band 5: 7W(38.45dBm) ERP

LTE TDD Band 41: 2W(33dBm) EIRP


FCC: §2.1046, §22.913, §27.50

TEST CONFIGURATION

For the actual test configuration, please refer to the related Item – EUT Test Photos.

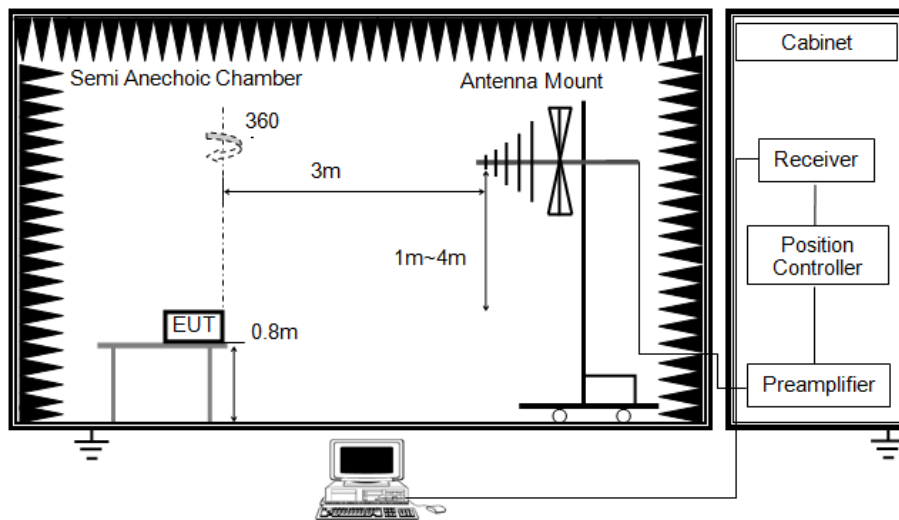

Below 1GHz

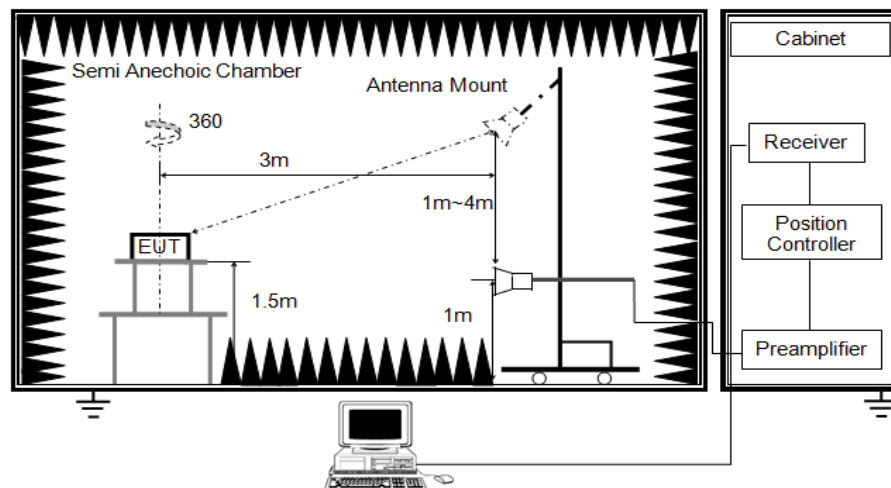

Above 1GHz

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be



calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, and the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. An amplifier should be connected to the Signal Source output port. And the cable should be connecting between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
6. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$

We used N5182A microwave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substitution test; The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

TEST RESULTS

Remark:

1. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.



LTE Band 5 - 1.4MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.66	23.13	≤38.45	PASS
	Mid	22.35	23.03		
	High	22.19	23.66		
16QAM	Low	22.00	23.89		
	Mid	21.57	23.88		
	High	22.19	23.47		

LTE Band 5 - 3MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.92	23.54	≤38.45	PASS
	Mid	21.88	23.25		
	High	22.30	23.83		
16QAM	Low	22.48	23.03		
	Mid	21.63	23.57		
	High	21.90	23.77		

LTE Band 5 - 5MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.90	23.29	≤38.45	PASS
	Mid	22.49	23.44		
	High	21.80	23.25		
16QAM	Low	22.25	23.72		
	Mid	22.34	23.93		
	High	22.13	23.44		



LTE Band 5 - 10MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.14	23.54	≤38.45	PASS
	Mid	22.15	23.21		
	High	21.62	23.93		
16QAM	Low	21.58	23.76		
	Mid	21.90	23.53		
	High	22.31	23.97		

LTE Band 41 - 5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.57	24.18	≤33	PASS
	Mid	22.94	24.73		
	High	22.88	24.46		
16QAM	Low	22.95	24.45		
	Mid	22.30	24.63		
	High	22.97	24.21		

LTE Band 41 - 10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.07	24.69	≤33	PASS
	Mid	22.03	24.78		
	High	22.11	24.12		
16QAM	Low	22.62	24.47		
	Mid	22.98	24.67		
	High	22.15	24.78		



LTE Band 41 - 15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.43	24.43	≤33	PASS
	Mid	22.39	24.33		
	High	22.92	24.88		
16QAM	Low	22.22	24.78		
	Mid	22.73	24.48		
	High	22.67	24.21		

LTE Band 41 - 20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.33	24.89	≤33	PASS
	Mid	22.75	24.15		
	High	22.03	24.64		
16QAM	Low	22.30	24.51		
	Mid	22.85	24.78		
	High	22.06	24.94		



3.7. Radiated Spurious Emission

LIMIT

§ 22.917(a), §24.238(a), §27.53 (g), (h), §90.691

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

§ 27.53 (Band 13)

(c) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

(f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals. (-70 dBW/MHz = -40 dBm/MHz).

FCC: § 90.669 Emission limits. (Band 26)

(a) On any frequency in an MTA licensee's spectrum block that is adjacent to a non-MTA frequency, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 plus $10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation.

§ 27.53 (a) (Band 30)


For mobile and portable stations operating in the 2305-2315 MHz: by a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

§ 27.53 (m) (Band 7, 41)


At least $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

TEST CONFIGURATION

For the actual test configuration, please refer to the related Item – EUT Test Photos.

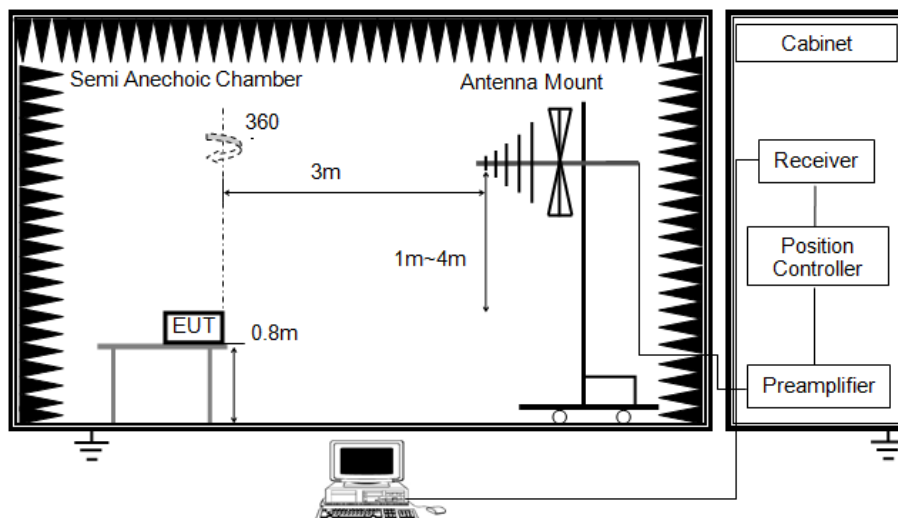

Below 1GHz

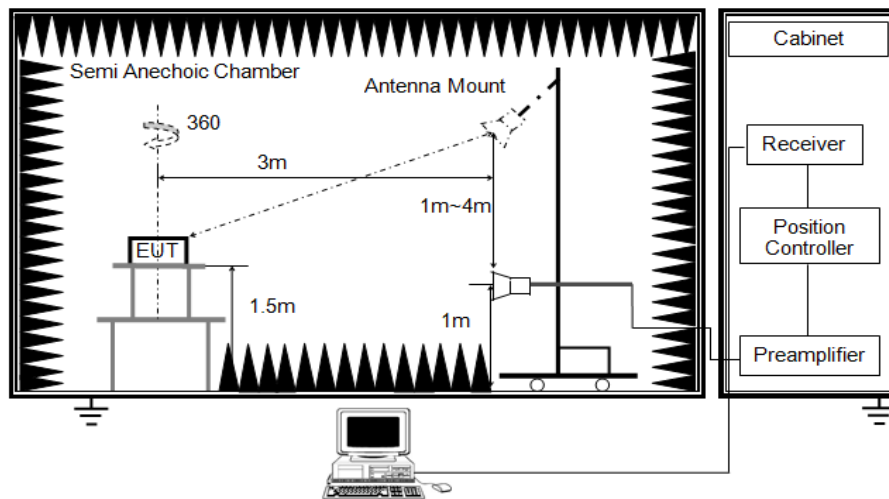

Above 1GHz

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, and the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. An amplifier should be connected to the Signal Source output port. And the cable should be connecting between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
6. The measurement results are obtained as described below:
7. $\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$
We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:
 $\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$



8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dBi) and known input power.

ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dBi$.

9. Test frequency range should extend to 10th harmonic of highest fundamental frequency.

TEST RESULTS

Remark:

1. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
2. We test all modulation types, all bandwidths, and record the worst case at the maximum bandwidth of each modulation.



Measured data (worst case):

Band 5 Radiated Spurious Emissions							
Bandwidth	Modulation	Test Channel	Spurious Emission			Limit (dBm)	Result
			Frequency	Level (dBm)	Polarization		
10MHz	QPSK	L	3430.00	-40.70	Horizontal	-13.00	Pass
			5145.00	-47.78	Horizontal		
			3430.00	-45.55	Vertical		
			5145.00	-52.94	Vertical		
10MHz	QPSK	M	3465.00	-40.51	Horizontal	-13.00	Pass
			5197.50	-48.37	Horizontal		
			3465.00	-41.63	Vertical		
			5197.50	-54.62	Vertical		
10MHz	QPSK	H	3500.00	-42.27	Horizontal	-13.00	Pass
			5250.00	-47.67	Horizontal		
			3500.00	-42.54	Vertical		
			5250.00	-52.98	Vertical		
10MHz	16QAM	L	3430.00	-42.11	Horizontal	-13.00	Pass
			5145.00	-49.81	Horizontal		
			3430.00	-41.64	Vertical		
			5145.00	-52.79	Vertical		
10MHz	16QAM	M	3465.00	-42.65	Horizontal	-13.00	Pass
			5197.50	-49.67	Horizontal		
			3465.00	-40.26	Vertical		
			5197.50	-52.90	Vertical		
10MHz	16QAM	H	3500.00	-40.50	Horizontal	-13.00	Pass
			5250.00	-48.03	Horizontal		
			3500.00	-40.11	Vertical		
			5250.00	-54.97	Vertical		

Remark:

1. The emission behavior belongs to narrowband spurious emission.
2. The emission levels of below 1 GHz are very lower than the limit above 10dB and not show in test report.



Band 41 Radiated Spurious Emissions							
Bandwidth	Modulation	Test Channel	Spurious Emission			Limit (dBm)	Result
			Frequency	Level (dBm)	Polarization		
20MHz	QPSK	L	5012.00	-41.23	Horizontal	-25.00	Pass
			7518.00	-49.22	Horizontal		
			5012.00	-45.41	Vertical		
			7518.00	-54.14	Vertical		
20MHz	QPSK	M	5186.00	-40.94	Horizontal	-25.00	Pass
			7779.00	-48.28	Horizontal		
			5186.00	-41.66	Vertical		
			7779.00	-52.59	Vertical		
20MHz	QPSK	H	5360.00	-42.07	Horizontal	-25.00	Pass
			8040.00	-48.93	Horizontal		
			5360.00	-40.43	Vertical		
			8040.00	-54.86	Vertical		
20MHz	16QAM	L	5012.00	-41.40	Horizontal	-25.00	Pass
			7518.00	-49.17	Horizontal		
			5012.00	-42.49	Vertical		
			7518.00	-52.93	Vertical		
20MHz	16QAM	M	5186.00	-40.78	Horizontal	-25.00	Pass
			7779.00	-49.76	Horizontal		
			5186.00	-40.64	Vertical		
			7779.00	-53.03	Vertical		
20MHz	16QAM	H	5360.00	-40.47	Horizontal	-25.00	Pass
			8040.00	-47.69	Horizontal		
			5360.00	-42.99	Vertical		
			8040.00	-52.71	Vertical		

Remark:

1. The emission behavior belongs to narrowband spurious emission.
2. The emission levels of below 1 GHz are very lower than the limit above 10dB and not show in test report.




3.8. Frequency stability

LIMIT

Cellular Band: $\pm 2.5\text{ppm}$ PCS Band: Within the authorized frequency block

TEST CONFIGURATION

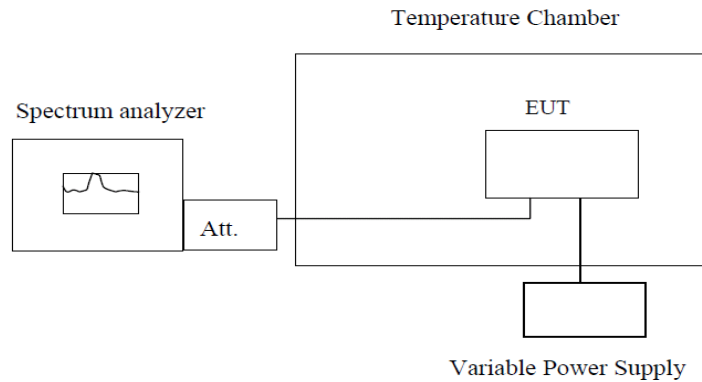

Note : Measurement setup for testing on Antenna connector

TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed inside the temperature chamber.
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.
5. Turn EUT off and set the chamber temperature to -20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
6. Repeat step measure with 10°C increased per stage until the highest temperature of 70°C reached.
7. Reduce the input voltage to specified extreme voltage variation (+/- 10%) and endpoint, record the maximum frequency change.

TEST RESULTS

Please see the appendix for every tested band.

*****THE END*****