

Shenzhen SKYLink Technology Co.,Ltd

Antenna Specification for Approval

Product Name:	BT Internal Antenna
Part NO.:	Digital microscope
Write By:	DamonCui
Issued Date:	2025.04.15
Manufacturer	NINGBO ZHANJING OPTICAL INSTRUMENTS CO.,LTD.
Address	No. 318, Xinxin Road, Langxia Street, Yuyao City, Zhejiang Province, China

● Specification Summary

A. Electrical Characteristics	
Frequency	2400MHz ~2500MHz
Return Loss	<-9.0 dbi
Efficiency	>20%
Peak Gain	1.21dBi
Impedance	50 Ohm
Polarization	Line
B. Material & Mechanical Characteristics	
Material of Radiator	Cu
Cable Type	/
Connector Type	/
Dimension	At Attachment
Heat-durability	280±5°C, 10sec.
C. Environmental Characteristics	
Operation Temperature	- 20 °C ~ + 80 °C
Storage Temperature	- 30 °C ~ + 85 °C

● Test Equipment & Conditions





1. Network Analyzers :

Agilent 8753D 5071B


Communications Test Set:

Agilent E5515C CMW500

2. 3D Chamber Test System

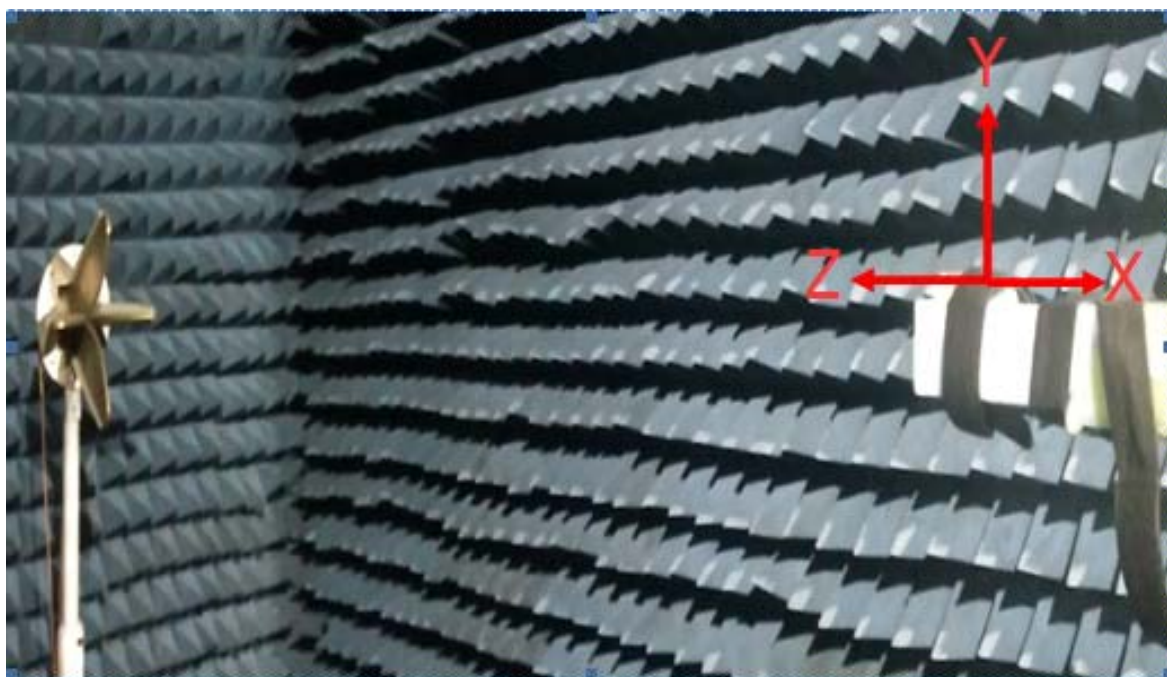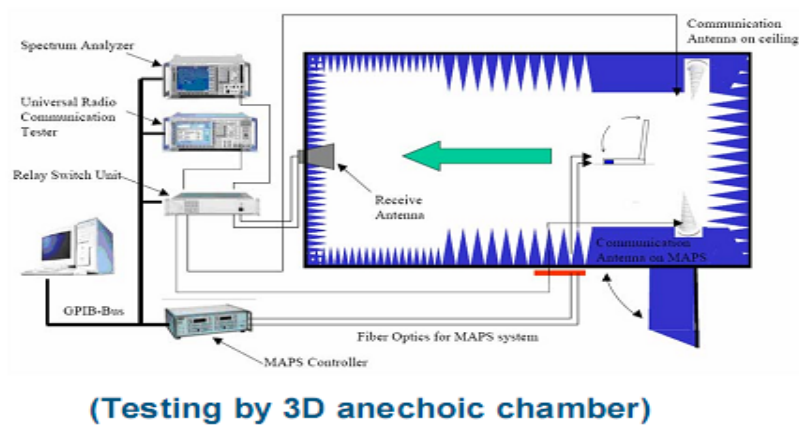

◆ Return Loss

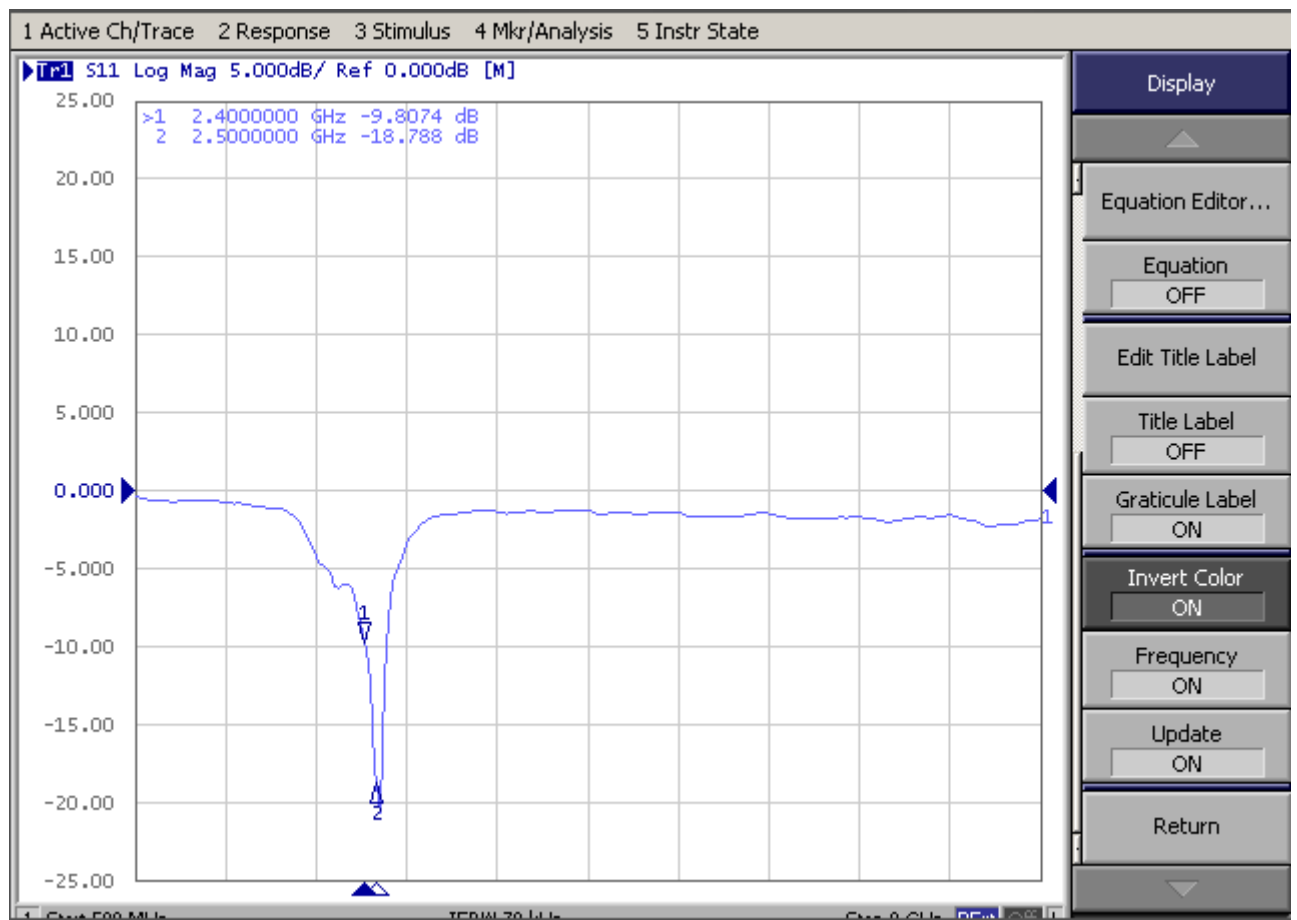


◆ Gain & Efficiency


Freq (MHz)	Effi (%)	Gain (dBi)
2400	30.55	0.97
2410	30.92	1.11
2420	30.95	1.21
2430	30.17	1.14
2440	28.51	0.94
2450	25.77	0.57
2460	25.22	0.55
2470	24.93	0.56
2480	25.45	0.7
2490	25.91	0.83
2500	24.42	0.66

◆ Radiation Pattern


2400.000MHz

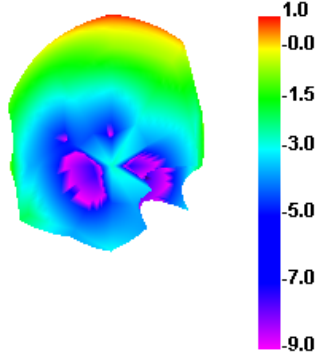


2400.000MHz H

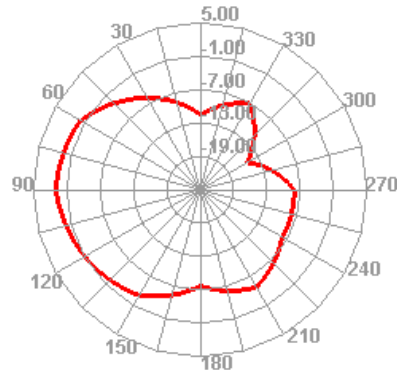


2400.000MHz E1

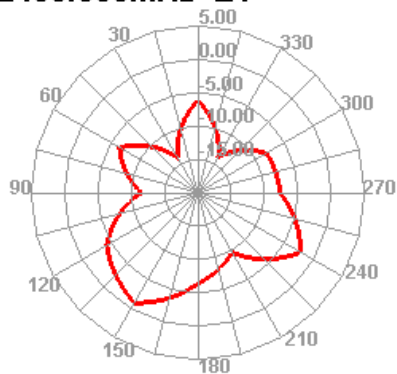


2400.000MHz E2

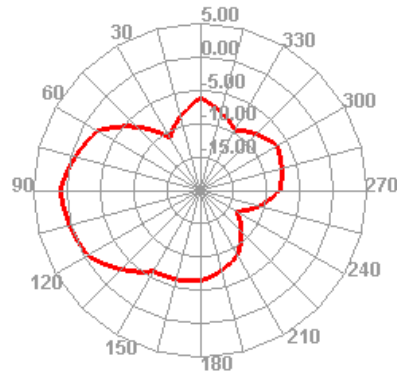


2450.000MHz

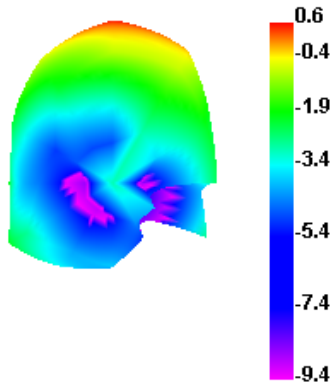


2450.000MHz H

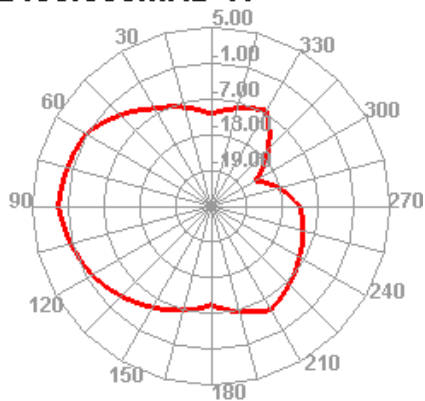



2450.000MHz E1

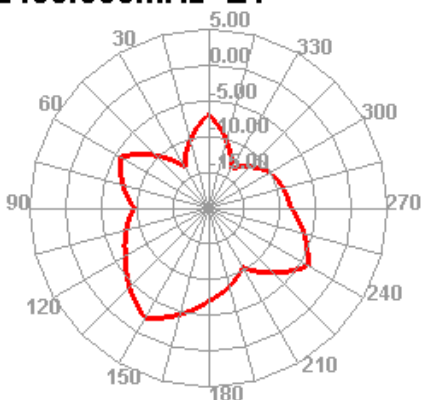


2450.000MHz E2

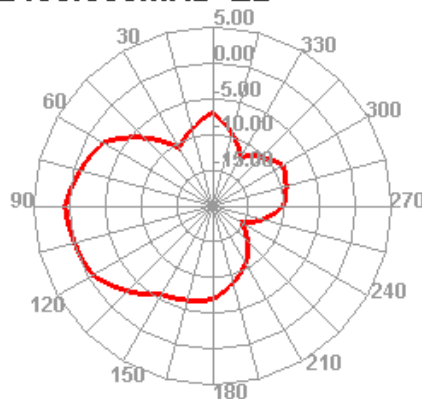


2500.000MHz




2500.000MHz H

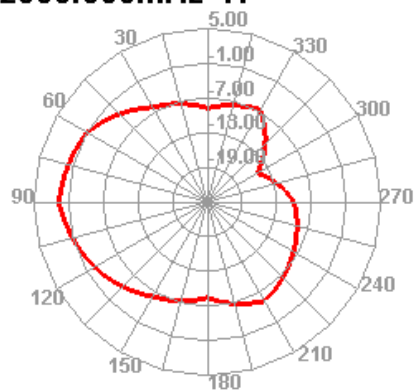


2500.000MHz E1

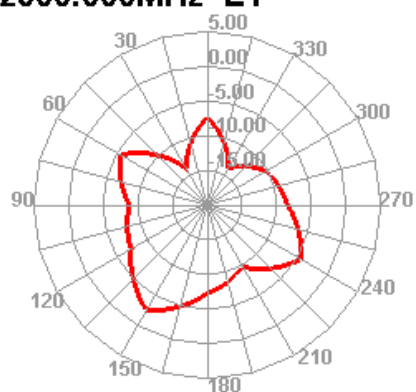

2500.000MHz E2

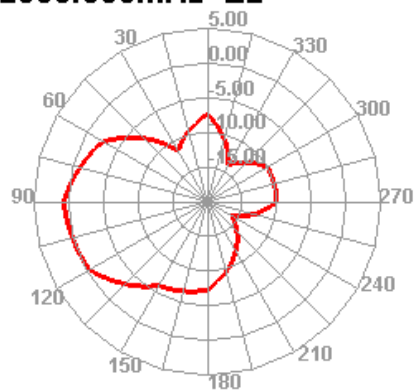

◆ Antenna Picture

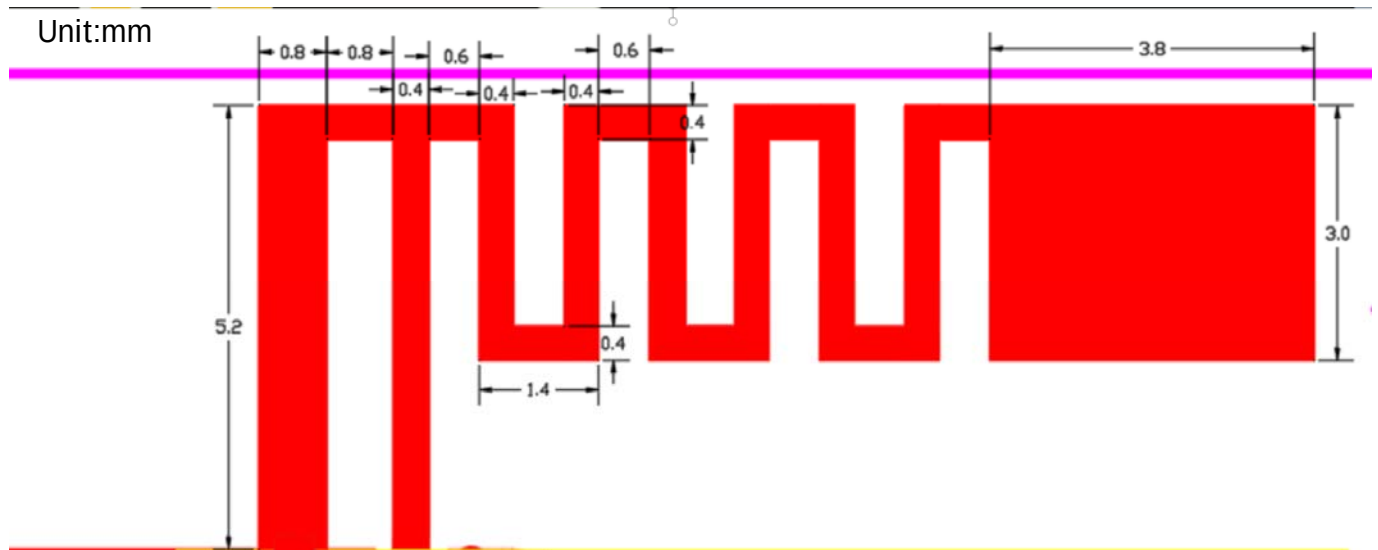

◆ Reliability Test

Test Item	Test condition	Equipment	Specification	Result
-----------	----------------	-----------	---------------	--------

1	Low Temp. Storage Test	Temperature: -30℃ , Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-down the temp. to -30℃ in one hour, store antenna for 44 hours; step-up temp to 25℃,test antenna after 2 hours.	Temp.&Humi. Tester	No material deformation is allowed. Electronic Performance is ok .	PASS
2	High Temp./High Humid Storage Test	Temperature: 85℃ Humidity: 85% RH Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-up the temp. to 80℃ and the humidity up to 85% in one hour, store antenna for 44 hours; step-down temp to 25℃,test antenna after 2 hours.	Temp.&Humi. Tester	No material deformation is allowed. Electronic Performance is ok .	PASS
3	Salt-Spray 6 pray Test	Placing antenna in the Salt-Spray Tester ,set the test condition , Temp: $35 \pm 2^{\circ}\text{C}$ Humidity: 85% NaCl salt spray :5 ± 1 %.PH value :6.5~7.2 Test time:24hours	Salt-Spray Tester	No color change No appear rusting	PASS