

TEST REPORT

Report No.	CISRR26071339601
Project No.	CISR260713396
FCC ID	2BW7C-HB-100V
Applicant	H.BY.H Corp.
Address	1511, 30 Gasan Digital 1-ro, Geumcheon-gu, Seoul, South Korea
Manufacturer	Guangzhou Boda Electronic Equipment Co., Ltd.
Address	Boda Science and Technology Park, Huanbao 3rd Road, Xintang Town, Zengcheng District, Guangzhou City, Guangdong Province, China
Product Name	Wireless Vertical Mouse
Trade mark	-
Model/Type reference	HB-100V
Listed Model(s)	HB-100V-YS0615
Standard	47 CFR Part 15.247
Date of sample receipt	July 13, 2026
Test date	July 15, 2026 to July 18, 2026
Issue date	July 20, 2026
Test result	Complied

Lucas Huang

Reviewed by: Lucas Huang



Approved by: Hans Hu

The test results relate only to the tested samples.

The test report should not be reproduced except in full without the written approval of Shenzhen Bangce Testing Technology Co., Ltd.

Contents

1. STANDARD AND APPLICABLE TEST METHODS	3
2. REPORT VERSION	3
3. TEST DESCRIPTION	4
4. SUMMARY	5
4.1. Product Description *	5
4.2. Radio Specification Description *	5
4.3. Modification of EUT	6
4.4. Deviation from standards	6
4.5. Testing Site	6
5. TEST CONFIGURATION	7
5.1. Test frequency list	7
5.2. Descriptions of test mode	7
5.3. Test sample information	7
5.4. Environmental conditions	7
5.5. Statement of the measurement uncertainty	7
5.6. Equipment Used during the Test	8
6. TEST RESULTS	9
6.1. Evaluation Results (Evaluation)	9
6.1.1. Antenna Requirement	9
6.2. Radio Spectrum Matter Test Results (RF)	10
6.2.1. 6dB Bandwidth	10
6.2.2. Maximum Conducted Output Power	11
6.2.3. Power Spectral Density	12
6.2.4. Conducted spurious emission	13
6.2.5. Radiated band edge emission	14
6.2.6. Radiated Spurious Emission (below 1GHz)	20
6.2.7. Radiated Spurious Emission (Above 1GHz)	24
7. APPENDIX REPORT	32
7.1. 6dB Bandwidth	32
7.2. Maximum Conducted Output Power	35
7.3. Power Spectral Density	38
7.4. Conducted spurious emission	41

1. STANDARD AND APPLICABLE TEST METHODS

The tests were performed according to following standards:

47 CFR Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

ANSI C63.10-2020: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

2. REPORT VERSION

Version No.	Issue date	Description
00	July 20, 2026	Original

3. TEST DESCRIPTION

No.	Test Item	Standard Requirement	Result
1	Antenna Requirement	47 CFR 15.203	Pass
2	6dB Bandwidth	47 CFR 15.247(a)(2)	Pass
3	Maximum Conducted Output Power	47 CFR 15.247(b)(3)	Pass
4	Power Spectral Density	47 CFR 15.247(e)	Pass
5	Conducted spurious emission	47 CFR 15.247(d)	Pass
6	Radiated band edge emission	47 CFR 15.247(d), 15.209, 15.205	Pass
7	Radiated Spurious Emission (below 1GHz)	47 CFR 15.247(d), 15.209, 15.205	Pass
8	Radiated Spurious Emission (Above 1GHz)	47 CFR 15.247(d), 15.209, 15.205	Pass

Note:

- The measurement uncertainty is not included in the test result.

4. SUMMARY

4.1. Product Description *

Main unit information:	
Product Name:	Wireless Vertical Mouse
Trade mark:	-
Model No.:	HB-100V
Listed Model(s):	HB-100V-YS0615
Model difference:	All process flows, materials of components, colors, manufacturing addresses, circuit principles, electrical structures, key safety parts, and critical components are identical for all listed models. Only differences such as model names exist, which do not affect product performance or test results.
Power supply:	DC 3V by alkaline AAA battery 1.5V*2
Hardware version:	-
Software version:	-

4.2. Radio Specification Description *

Modulation type:	GFSK
Operation frequency:	2402MHz to 2480MHz
Channel number:	40
Channel separation:	2MHz
Antenna type:	PCB antenna
Antenna gain:	1.74dBi

Note:

- 1) *: As the above information is provided by the applicant, all relevant results and conclusions of this report are based solely on such information. Bangce lab shall not be liable for the authenticity, integrity, and resulting outcomes of the information, and/or the validity of the conclusions herein.
- 2) Operation frequency list as follow:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474

7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

4.3. Modification of EUT

No modifications are made to the EUT during all test items.

4.4. Deviation from standards

None

4.5. Testing Site

Laboratory Name	Shenzhen Bangce Testing Technology Co., Ltd.
Laboratory Location	101, building 10, Yunli Intelligent Park, Shutianpu community, Matian Street, Guangming District, Shenzhen, Guangdong, China
Contact information	Tel: 86-755-2319 6848, email: service@cis-cn.net Website: http://www.cis-cn.net/
FCC registration number	736346
FCC designation number	CN1372

5. TEST CONFIGURATION

5.1. Test frequency list

Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
2402	2440	2480

5.2. Descriptions of test mode

No	Test mode	Description
Mode1	TX mode	Keep the EUT in continuously transmitting mode with GFSK modulation at lowest, middle and highest channel.
Mode2	Link mode	Keep the EUT in Bluetooth linking mode with AE.

5.3. Test sample information

Type	Sample No.
Engineer sample	CISR260713396-S01
Normal sample	CISR260713396-S02

5.4. Environmental conditions

Type	Requirement
Temperature:	15~35°C
Relative Humidity:	25~75%
Air Pressure:	860~1060mbar

5.5. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	Bandwidth	0.19%
2	Conducted output power	1.38dB
3	Power spectral density	1.39dB
4	Conducted spurious emission	1.40dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

5.6. Equipment Used during the Test

6dB Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in non-restricted frequency bands						
Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	Spectrum analyzer	R&S	FSV-40N	CIS-RE011	2026/1/6	2027/1/5
2	Test software	TST	298	CIS-SZ-002	2026/4/1	2026/9/1
3	Network box	TST-Trial	298	-	2026/4/1	2026/9/1

Band edge emissions (Radiated) Emissions in frequency bands (below 1GHz) Emissions in frequency bands (above 1GHz)						
Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	9*6*6 anechoic chamber	SKET	9.3*6.3*6	N/A	2024-09-02	2027-09-01
2	Spectrum analyzer	Agilent	N9020A	MY50530263	2026-01-06	2027-01-05
3	Spectrum analyzer	R&S	FSV-40N	102130	2026-01-06	2027-01-05
4	Bilog Antenna	Schwarzbeck	VULB 9163	1463	2026-01-06	2029-01-05
5	Horn Antenna	SCHWARZBECK	BBHA 9120 D	2487	2026-01-06	2029-01-05
6	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	/	2026-01-06	2029-01-05
7	RF Cable	Tonscend	Cable 1	/	2026-01-06	2027-01-05
8	RF Cable	Tonscend	Cable 2	/	2026-01-06	2027-01-05
9	RF Cable	SKET	Cable 3	/	2026-01-06	2027-01-05
10	L.I.S.N.#1	Schwarzbeck	NSLK812 7	/	2026-01-06	2027-01-05
11	L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	2026-01-06	2027-01-05
12	Horn Antenna	SCHWARZBECK	BBHA9170	1130	2026-01-06	2029-01-05
13	Preamplifier	Tonscend	TAP1804 0048	AP21C806126	2026-01-06	2027-01-05
14	Variable-frequency power source	Pinhong	PH1110	/	2026-01-06	2027-01-05
15	6dB Attenuator	SKET	DC-6G	/	2026-01-06	2027-01-05
16	Antenna tower	SKT	Bk-4AT-BS	AT202104010 1-V1	2026-01-06	2027-01-05

6. TEST RESULTS

6.1. Evaluation Results (Evaluation)

6.1.1. Antenna Requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
Test Method:	---

6.1.1.1. Test Result

Pass

6.1.1.2. Conclusion:

The EUT antenna is PCB antenna. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used. Antenna structure please refer to the EUT internal photographs antenna photo.

6.2. Radio Spectrum Matter Test Results (RF)

6.2.1. 6dB Bandwidth

Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2020, section 11.8
Procedure:	11.8.1 Option 1 The steps for the first option are as follows: a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max-hold. e) Sweep = No faster than coupled (auto) time. f) Allow the trace to stabilize. g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value. 11.8.2 Option 2 The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times \text{RBW}$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

6.2.1.1. E.U.T. Operation

Operating Environment:					
Temperature:	22.2 °C	Humidity:	56.3 %	Atmospheric Pressure:	102.9 kPa
Pre test mode:	Mode1				
Final test mode:	Mode1				

6.2.1.2. Test Setup Diagram



6.2.1.3. Test Result

Pass

6.2.1.4. Test Data

Please Refer to Appendix for Details.

6.2.2. Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2020 section 11.9.1
Procedure:	ANSI C63.10-2020, section 11.9.1 Maximum peak conducted output power

6.2.2.1. E.U.T. Operation

Operating Environment:					
Temperature:	23 °C	Humidity:	56.9 %	Atmospheric Pressure:	102.9 kPa
Pre test mode:	Mode1				
Final test mode:	Mode1				

6.2.2.2. Test Setup Diagram



6.2.2.3. Test Result

Pass

6.2.2.4. Test Data

Please Refer to Appendix for Details.

6.2.3. Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2020, section 11.10
Procedure:	ANSI C63.10-2020+Cor 1-2023, section 11.10, Maximum power spectral density level in the fundamental emission

6.2.3.1. E.U.T. Operation

Operating Environment:					
Temperature:	22.2 °C	Humidity:	56.4 %	Atmospheric Pressure:	102.9 kPa
Pre test mode:	Mode1				
Final test mode:	Mode1				

6.2.3.2. Test Setup Diagram



6.2.3.3. Test Result

Pass

6.2.3.4. Test Data

Please Refer to Appendix for Details.

6.2.4. Conducted spurious emission

Test Requirement:	47 CFR 15.247(d)
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2020 section 11.11
Procedure:	ANSI C63.10-2020 Section 11.11.1, Section 11.11.2, Section 11.11.3

6.2.4.1. E.U.T. Operation

Operating Environment:					
Temperature:	23 °C	Humidity:	56 %	Atmospheric Pressure:	102.9 kPa
Pre test mode:	Mode1				
Final test mode:	Mode1				

6.2.4.2. Test Setup Diagram



6.2.4.3. Test Result

Pass

6.2.4.4. Test Data

Please Refer to Appendix for Details.


6.2.5. Radiated band edge emission

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.10		
Procedure:	1>. EUT was setup and tested according to ANSI C63.10 . 2>. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. 3>. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. 4>. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement. 5>. Use the following spectrum analyzer settings: a) Span shall wide enough to fully capture the emission being measured b) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement For average measurement: use duty cycle correction factor method (DCCF), Average level = Peak level + DCCF		

6.2.5.1. E.U.T. Operation

Operating Environment:					
Temperature:	23.3 °C	Humidity:	56.6 %	Atmospheric Pressure:	102.8 kPa
Pre test mode:	Mode1				
Final test mode:	Mode1				

6.2.5.2. Test Setup Diagram

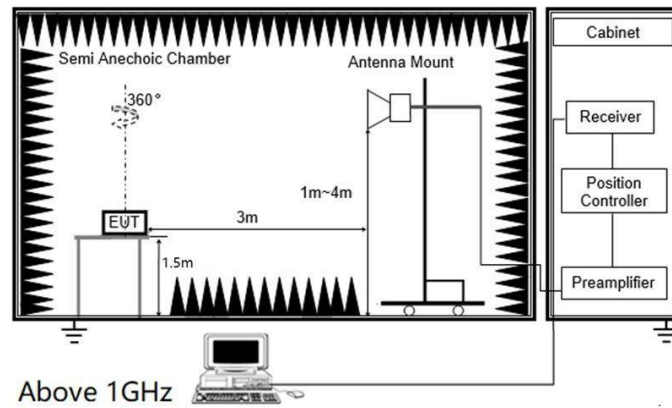


6.2.5.3. Test Result

Pass


6.2.5.4. Test Data

Mode1 / Polarization: Horizontal / CH: L

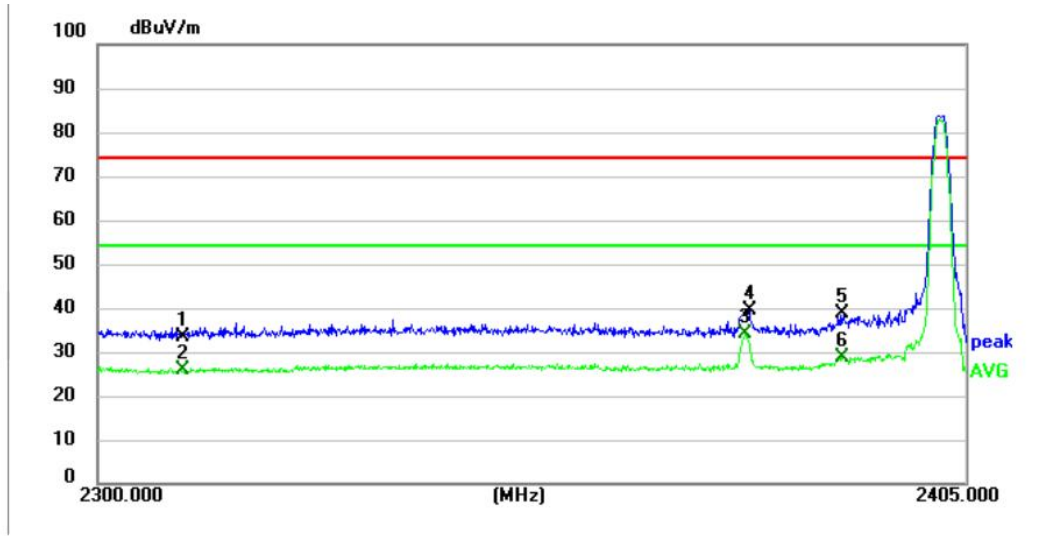


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.0000	50.86	-17.52	33.34	74.00	40.66	peak
2	2310.0000	43.24	-17.52	25.72	54.00	28.28	AVG
3 *	2378.0149	51.34	-17.35	33.99	54.00	20.01	AVG
4	2378.4350	56.93	-17.35	39.58	74.00	34.42	peak
5	2390.0000	56.08	-17.32	38.76	74.00	35.24	peak
6	2390.0000	46.00	-17.32	28.68	54.00	25.32	AVG

Mode1 / Polarization: Vertical / CH: L

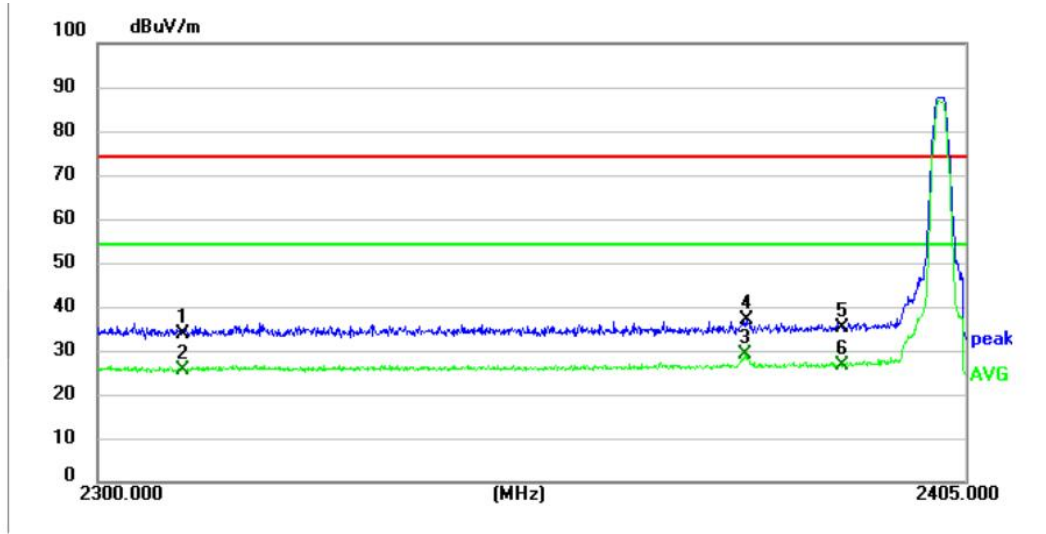


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.0000	51.25	-17.52	33.73	74.00	40.27	peak
2	2310.0000	43.00	-17.52	25.48	54.00	28.52	AVG
3 *	2377.9520	46.47	-17.35	29.12	54.00	24.88	AVG
4	2378.1620	54.46	-17.35	37.11	74.00	36.89	peak
5	2390.0000	52.55	-17.32	35.23	74.00	38.77	peak
6	2390.0000	43.78	-17.32	26.46	54.00	27.54	AVG

Mode1 / Polarization: Horizontal / CH: H

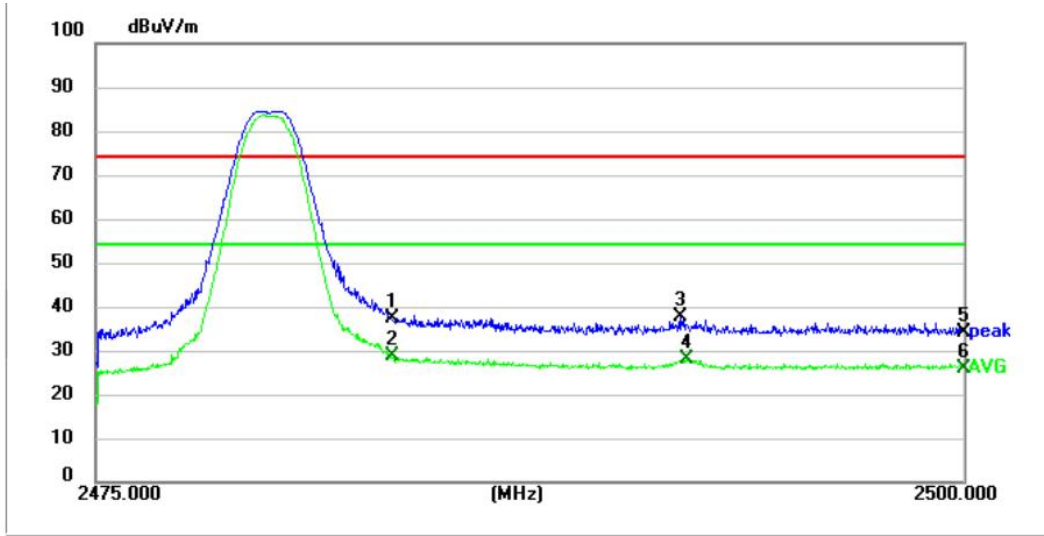

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.5000	54.25	-17.03	37.22	74.00	36.78	peak
2 *	2483.5000	45.64	-17.03	28.61	54.00	25.39	AVG
3	2491.8500	54.67	-16.98	37.69	74.00	36.31	peak
4	2492.0250	45.18	-16.98	28.20	54.00	25.80	AVG
5	2500.0000	51.03	-16.94	34.09	74.00	39.91	peak
6	2500.0000	42.72	-16.94	25.78	54.00	28.22	AVG

Mode1 / Polarization: Vertical / CH: H

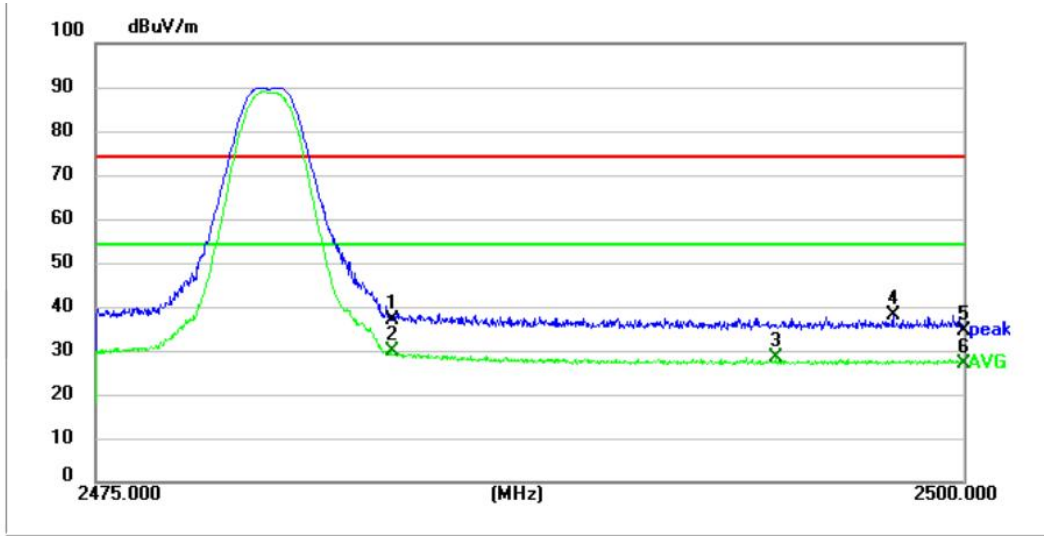

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.5000	54.15	-17.03	37.12	74.00	36.88	peak
2 *	2483.5000	46.68	-17.03	29.65	54.00	24.35	AVG
3	2494.6000	45.25	-16.97	28.28	54.00	25.72	AVG
4	2497.9900	54.84	-16.95	37.89	74.00	36.11	peak
5	2500.0000	51.52	-16.94	34.58	74.00	39.42	peak
6	2500.0000	44.00	-16.94	27.06	54.00	26.94	AVG


6.2.6. Radiated Spurious Emission (below 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.5.4		
Procedure:	1>. The EUT was setup and tested according to ANSI C63.10. 2>. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level. 3>. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower. 4>. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines. 5>. Set to the maximum power setting and enable the EUT transmit continuously. 6>. Use the following spectrum analyzer settings a) Span shall wide enough to fully capture the emission being measured; b) RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.		

6.2.6.1. E.U.T. Operation

Operating Environment:					
Temperature:	22 °C	Humidity:	56 %	Atmospheric Pressure:	102.9 kPa
Pre test mode:	Mode1, Mode2				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode2) is recorded in the report				

6.2.6.2. Test Setup Diagram

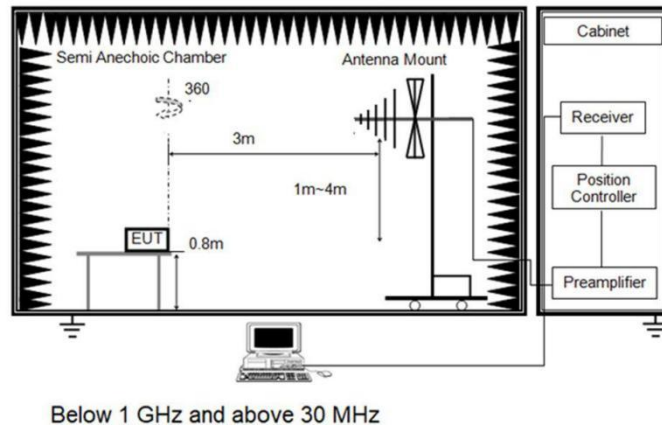


6.2.6.3. Test Result

Pass


6.2.6.4. Test Data

Mode2 / Polarization: Horizontal

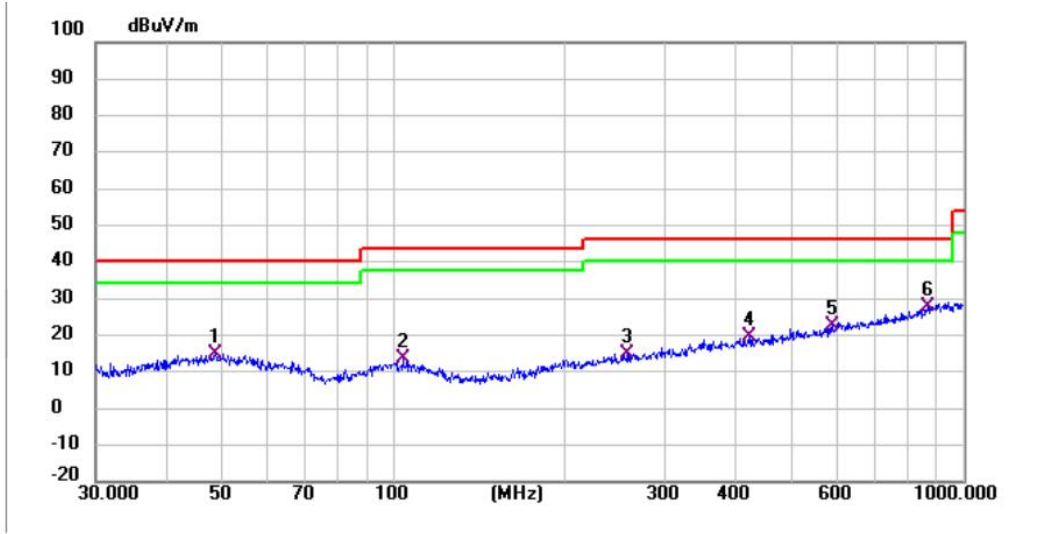

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	48.6720	43.73	-28.66	15.07	40.00	24.93	QP
2	103.8054	43.86	-30.36	13.50	43.50	30.00	QP
3	257.4221	43.71	-28.72	14.99	46.00	31.01	QP
4	420.5803	44.17	-24.52	19.65	46.00	26.35	QP
5	588.9050	43.67	-21.03	22.64	46.00	23.36	QP
6 *	866.0880	44.47	-16.88	27.59	46.00	18.41	QP

Mode2 / Polarization: Vertical

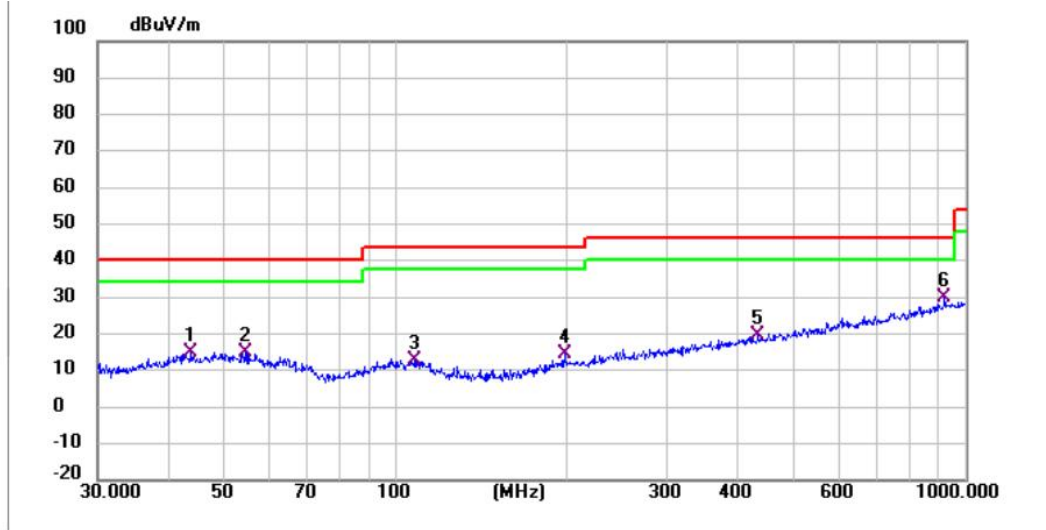

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	43.8120	43.85	-28.86	14.99	40.00	25.01	QP
2	54.4515	44.09	-29.01	15.08	40.00	24.92	QP
3	107.8877	43.23	-30.51	12.72	43.50	30.78	QP
4	197.8928	44.72	-30.40	14.32	43.50	29.18	QP
5	432.5456	43.94	-24.37	19.57	46.00	26.43	QP
6 *	919.2865	46.02	-16.27	29.75	46.00	16.25	QP

Note:

1>. For 9 kHz ~ 30 MHz Measurement

The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

2>. Level= Reading + Factor (Antenna Factor+ Cable Loss- Preamp Factor)

3>. Margin = Limit – Level


6.2.7. Radiated Spurious Emission (Above 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), in addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020 section 6.5.4		
Procedure:	1>. The EUT was setup and tested according to ANSI C63.10. 2>. The EUT is placed on a turn table which is 0.8 meter above ground for 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level. 3>. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower. 4>. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines. 5>. Set to the maximum power setting and enable the EUT transmit continuously. 6>. Use the following spectrum analyzer settings a) Span shall wide enough to fully capture the emission being measured; b) Set RBW=1MHz, VBW=3MHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement For average measurement: use duty cycle correction factor method (DCCF) Average level = Peak level + DCCF		

6.2.7.1. E.U.T. Operation

Operating Environment:					
Temperature:	22.7 °C	Humidity:	55.5 %	Atmospheric Pressure:	102.8 kPa
Pre test mode:	Mode1, Mode2				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report				

6.2.7.2. Test Setup Diagram

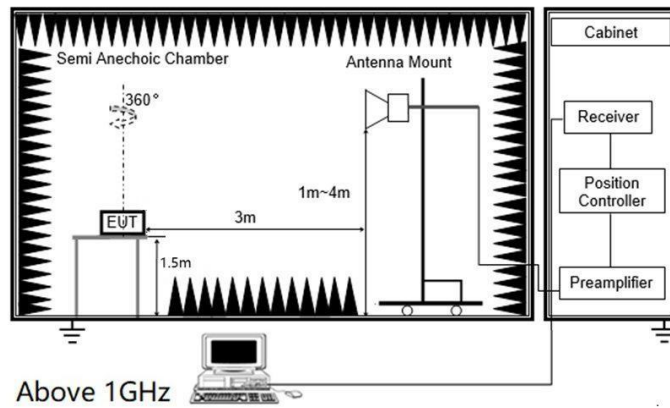


6.2.7.3. Test Result

Pass


6.2.7.4. Test Data

Mode1 / Polarization: Horizontal / CH: L

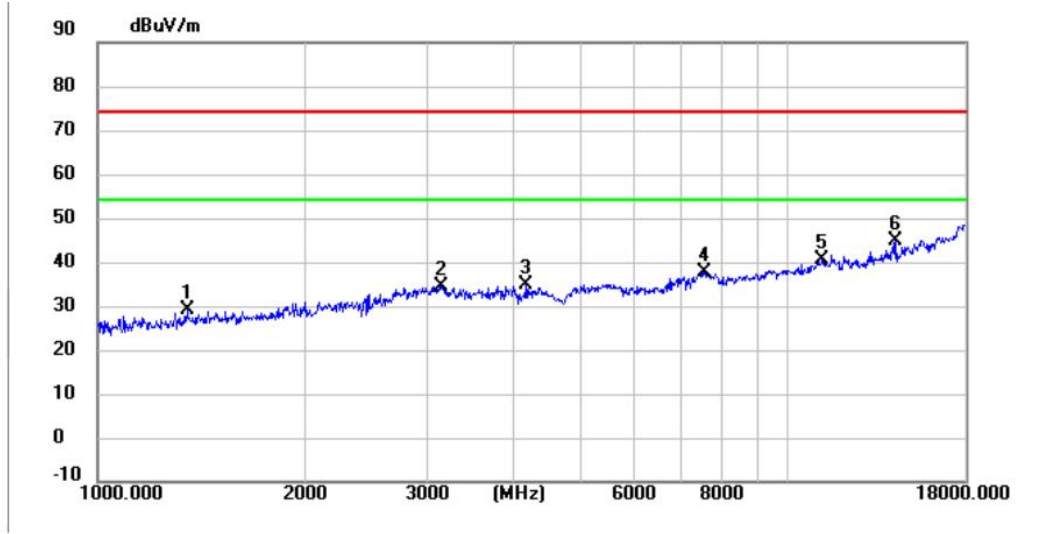


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1346.8000	50.24	-21.20	29.04	74.00	44.96	peak
2	3155.6000	48.73	-14.22	34.51	74.00	39.49	peak
3	4172.2000	46.53	-11.88	34.65	74.00	39.35	peak
4	7563.7000	32.23	5.55	37.78	74.00	36.22	peak
5	11176.2000	26.99	13.62	40.61	74.00	33.39	peak
6 *	14253.2000	26.36	18.54	44.90	74.00	29.10	peak

Mode1 / Polarization: Vertical / CH: L

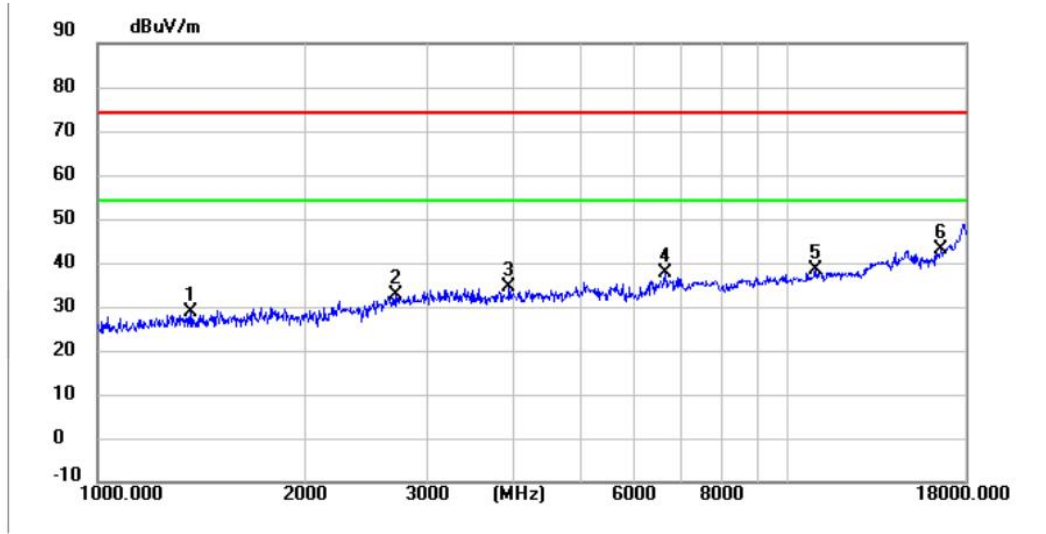


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1365.5000	50.03	-21.17	28.86	74.00	45.14	peak
2	2696.6000	48.28	-15.77	32.51	74.00	41.49	peak
3	3939.3000	46.92	-12.44	34.48	74.00	39.52	peak
4	6623.6000	37.39	0.37	37.76	74.00	36.24	peak
5	10921.2000	25.21	13.03	38.24	74.00	35.76	peak
6 *	16612.8000	25.62	17.36	42.98	74.00	31.02	peak

Mode1 / Polarization: Horizontal / CH: M

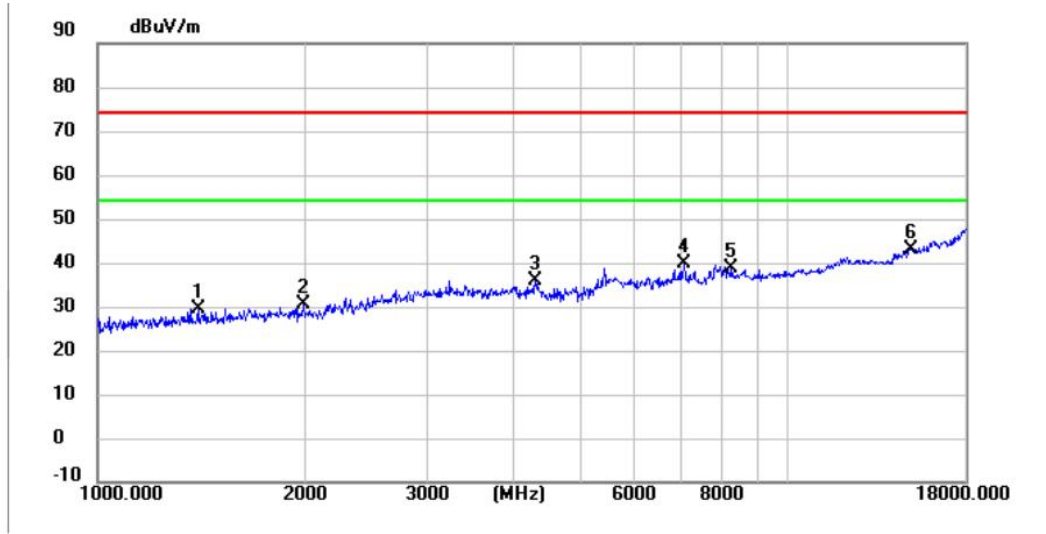


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1401.2000	50.58	-21.11	29.47	74.00	44.53	peak
2	1987.7000	49.10	-18.63	30.47	74.00	43.53	peak
3	4298.0000	47.71	-11.69	36.02	74.00	37.98	peak
4	7074.1000	35.75	3.95	39.70	74.00	34.30	peak
5	8281.1000	31.79	6.97	38.76	74.00	35.24	peak
6 *	15035.2000	25.49	17.69	43.18	74.00	30.82	peak

Mode1 / Polarization: Vertical / CH: M

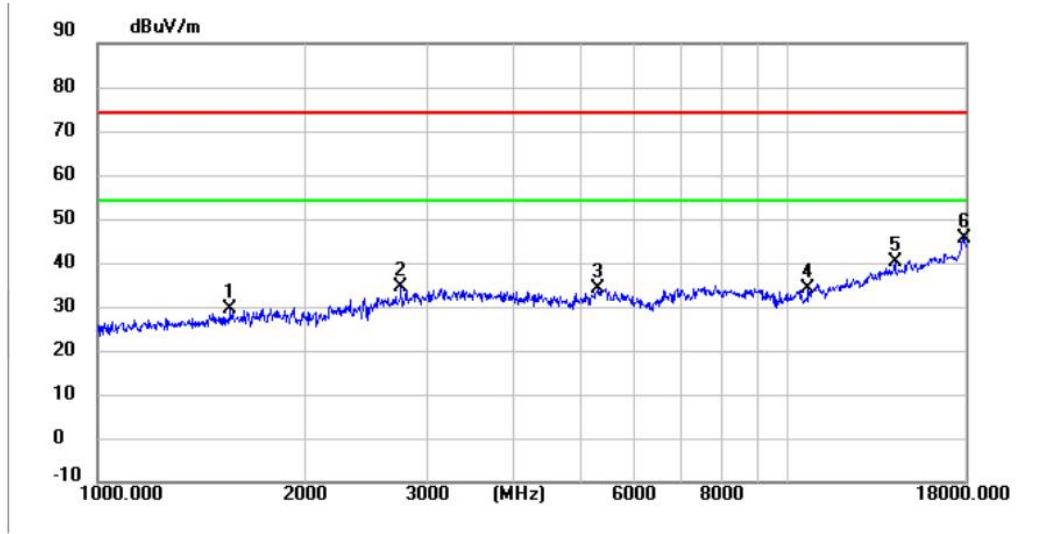


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1557.6000	50.13	-20.62	29.51	74.00	44.49	peak
2	2751.0000	50.06	-15.67	34.39	74.00	39.61	peak
3	5304.4000	41.85	-7.60	34.25	74.00	39.75	peak
4	10693.4000	21.71	12.45	34.16	74.00	39.84	peak
5	14254.9000	21.64	18.54	40.18	74.00	33.82	peak
6 *	17967.7000	21.61	23.89	45.50	74.00	28.50	peak

Mode1 / Polarization: Horizontal / CH: H

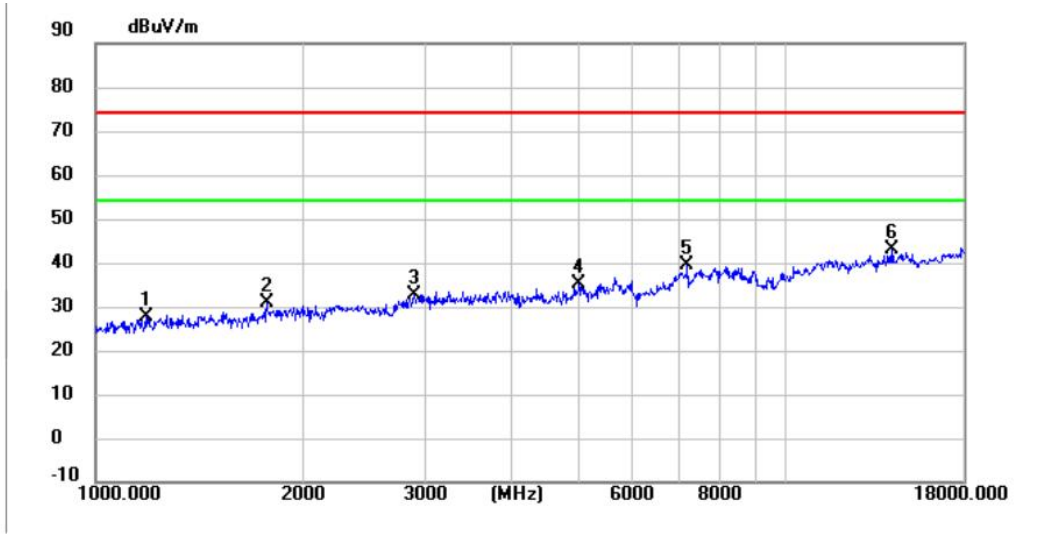

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1187.0000	49.28	-21.51	27.77	74.00	46.23	peak
2	1771.8000	50.52	-19.67	30.85	74.00	43.15	peak
3	2898.9000	47.67	-14.88	32.79	74.00	41.21	peak
4	5005.2000	43.80	-8.70	35.10	74.00	38.90	peak
5	7191.4000	34.97	4.38	39.35	74.00	34.65	peak
6 *	14176.7000	24.47	18.60	43.07	74.00	30.93	peak

Mode1 / Polarization: Vertical / CH: H

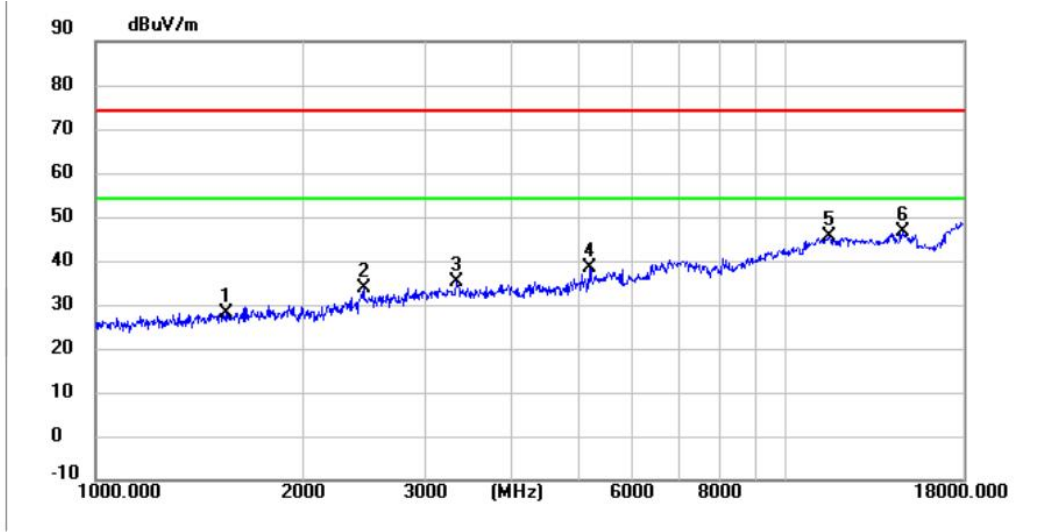

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1544.0000	48.85	-20.66	28.19	74.00	45.81	peak
2	2443.3000	50.94	-17.22	33.72	74.00	40.28	peak
3	3337.5000	48.96	-13.87	35.09	74.00	38.91	peak
4	5199.0000	46.53	-7.98	38.55	74.00	35.45	peak
5	11540.0000	31.63	14.03	45.66	74.00	28.34	peak
6 *	14737.7000	28.37	18.10	46.47	74.00	27.53	peak

Note:

1>. Level= Reading + Factor (Antenna Factor+ Cable Loss- Preamp Factor)

2>. Margin = Limit – Level

3>. Average measurement was not performed if peak level is lower than average limit (54dBuV/m) above 1GHz.


7. APPENDIX REPORT

7.1. 6dB Bandwidth


Test Result

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.839	≥ 0.5	Pass
		2440	1	0.743	≥ 0.5	Pass
		2480	1	0.829	≥ 0.5	Pass

Test Graph

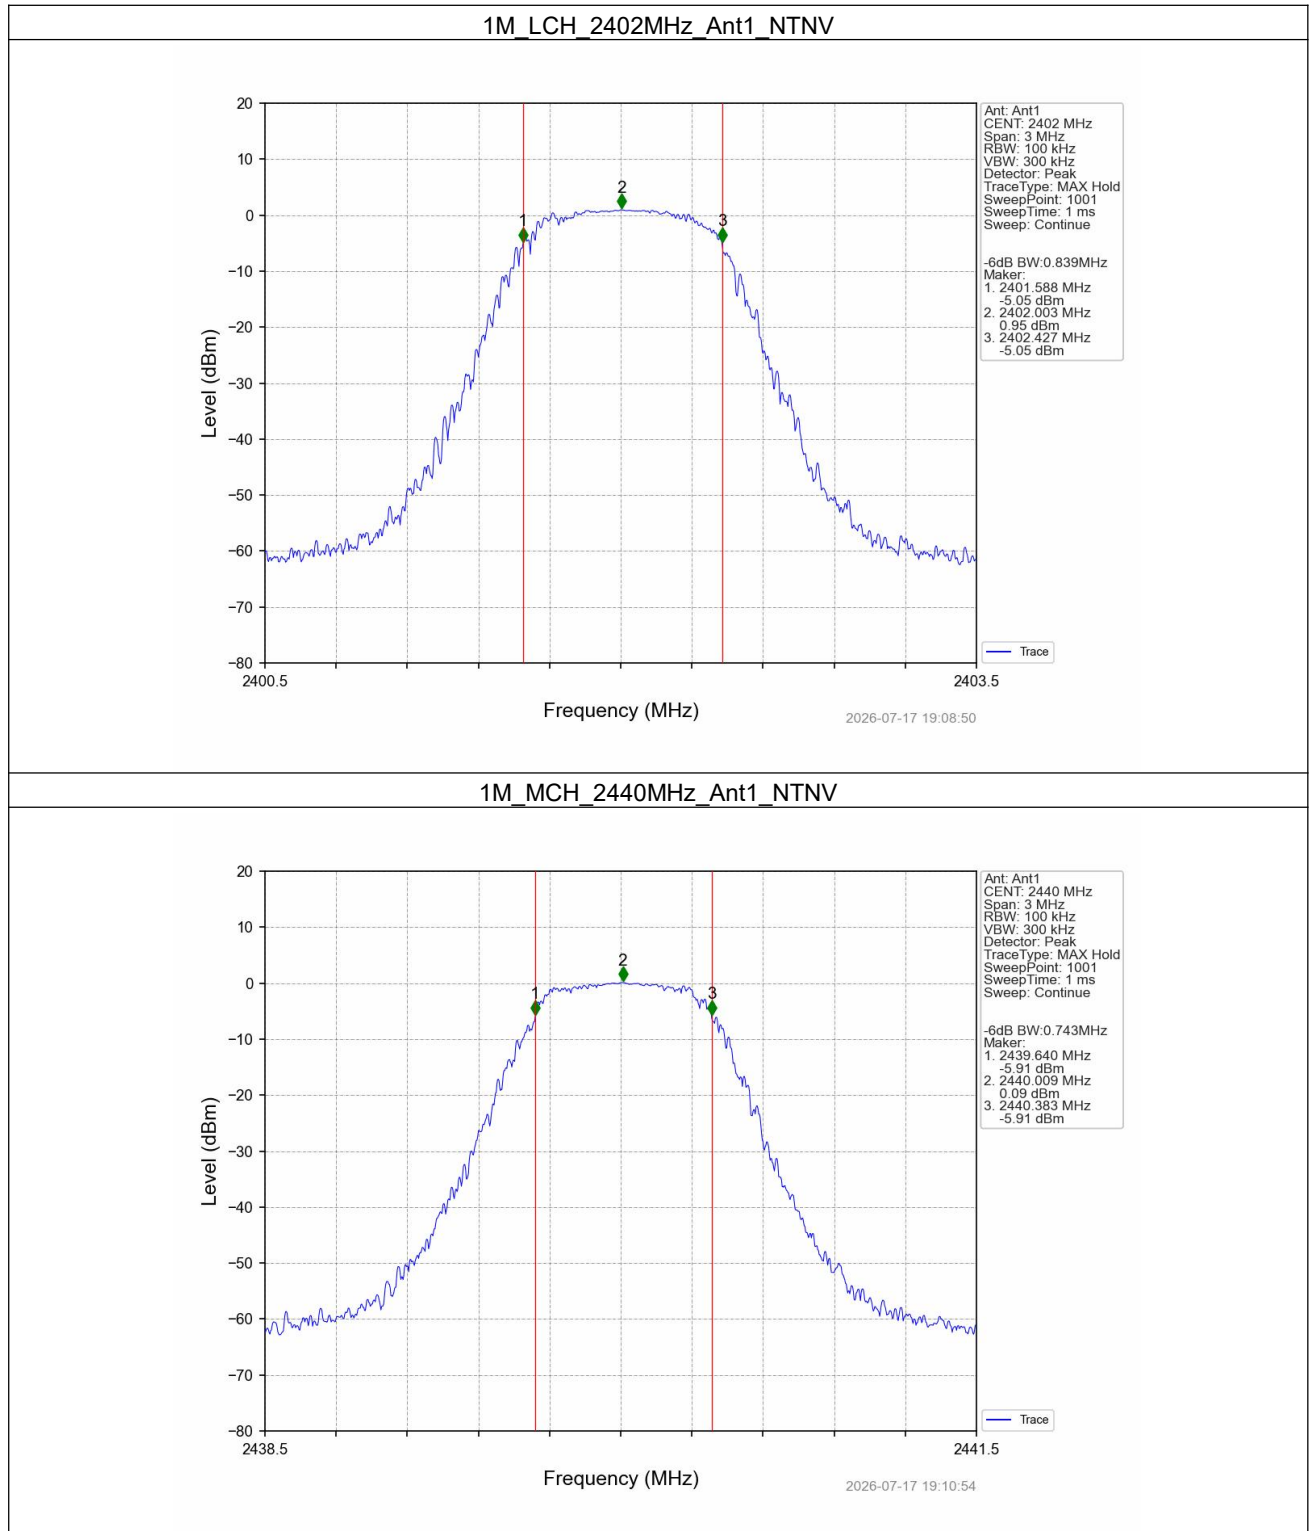

1M_HCH_2480MHz_Ant1_NTNV

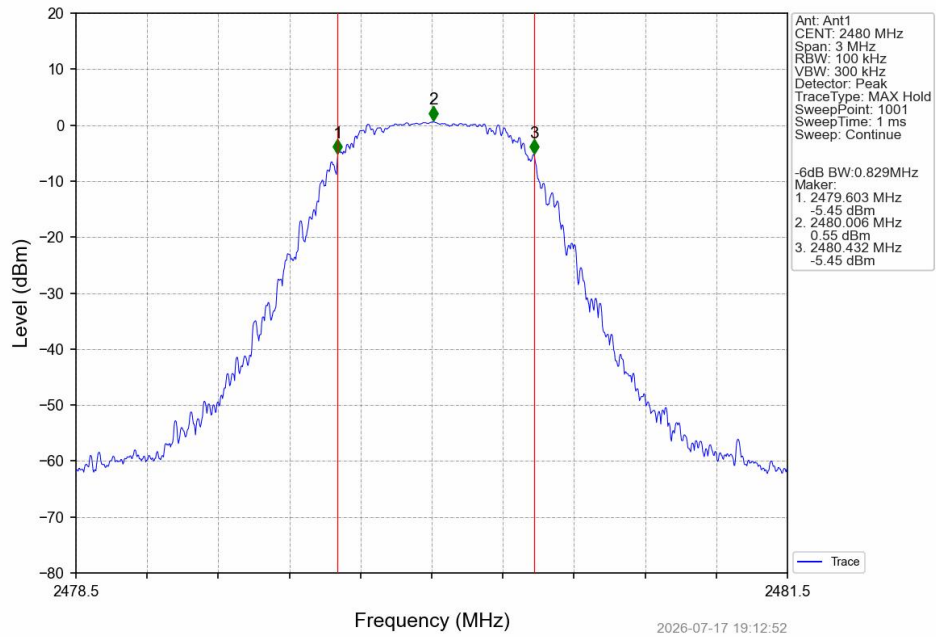


7.2. Maximum Conducted Output Power


Test Result

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	1.00	<=30	Pass
		2440	0.13	<=30	Pass
		2480	0.61	<=30	Pass

Test Graph

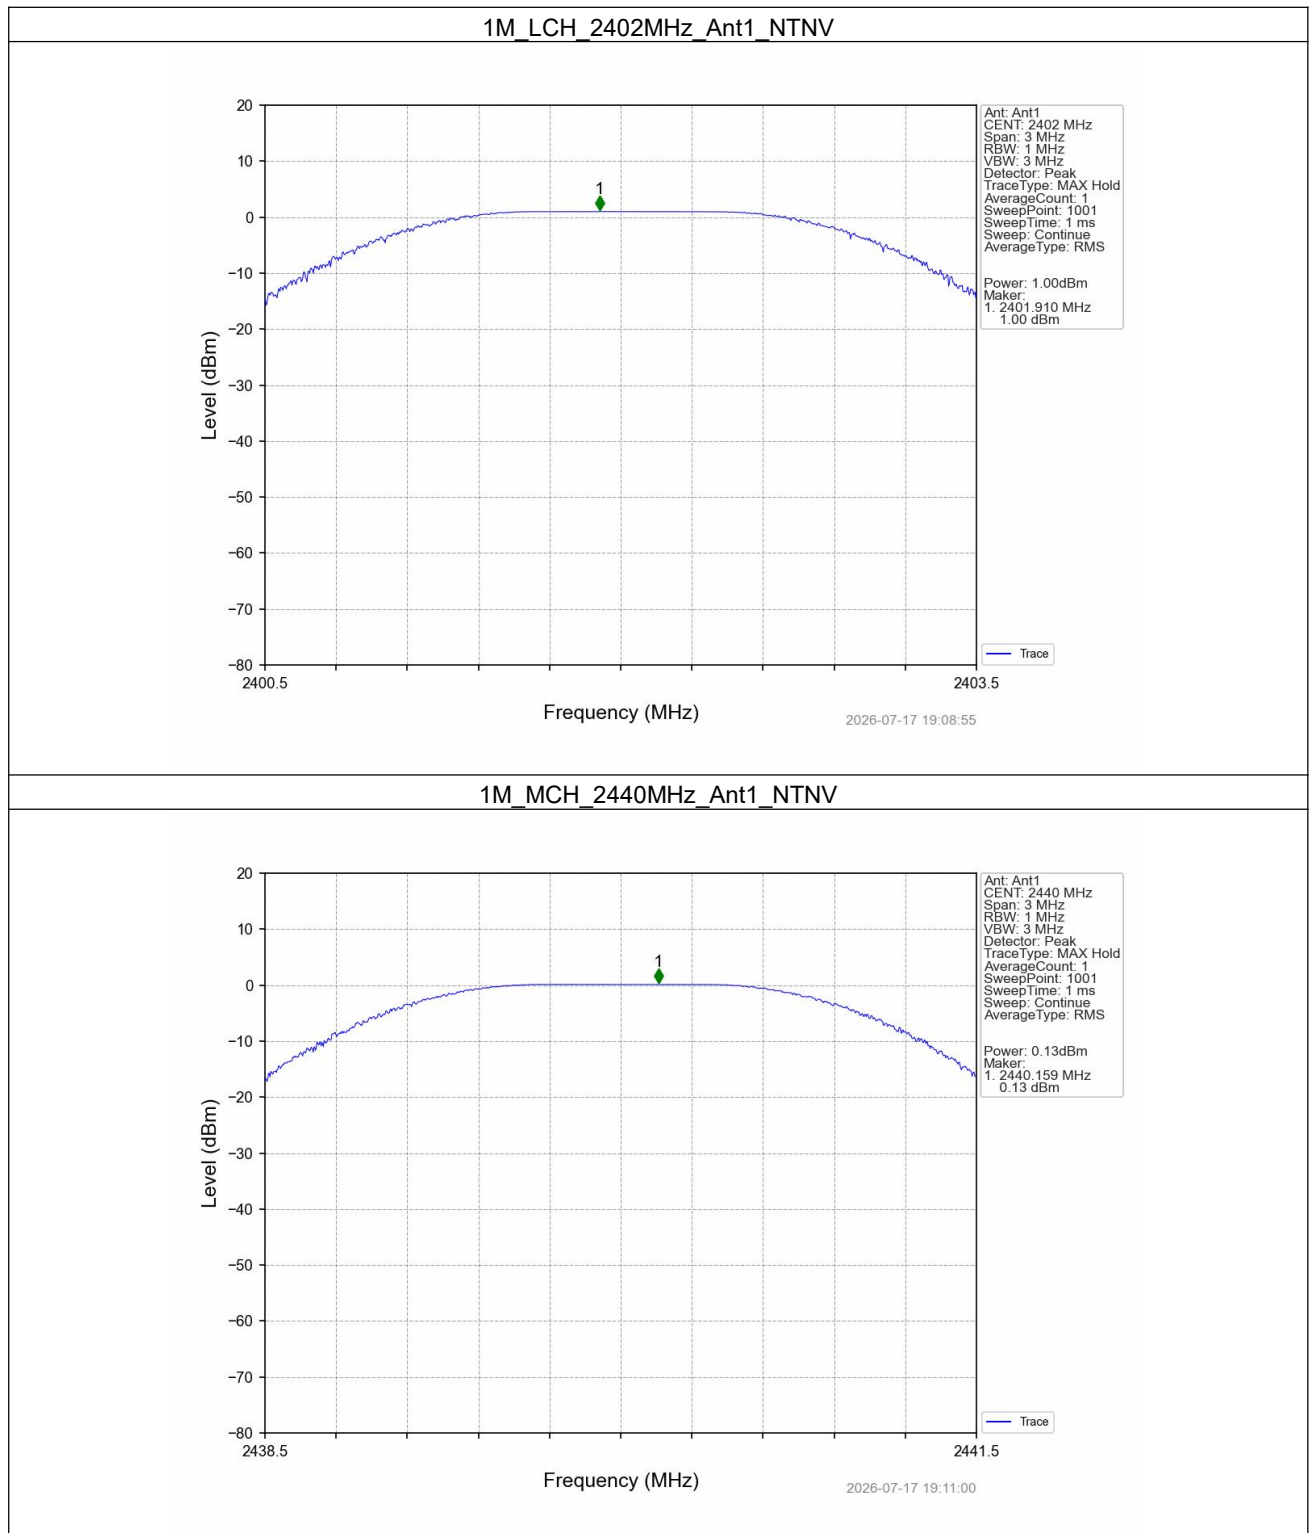

1M_HCH_2480MHz_Ant1_NTNV

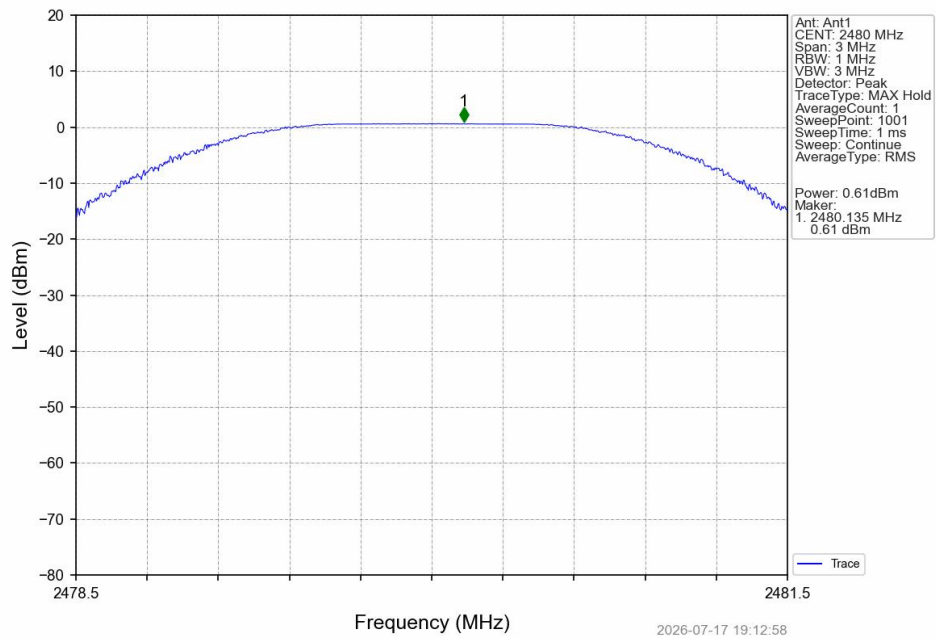


7.3. Power Spectral Density


Test Result

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm)		Verdict
			ANT1	Limit(dBm/3kHz)	
1M	SISO	2402	0.94dBm/100kHz	<=8	Pass
		2440	0.10dBm/100kHz	<=8	Pass
		2480	0.53dBm/100kHz	<=8	Pass

Test Graph

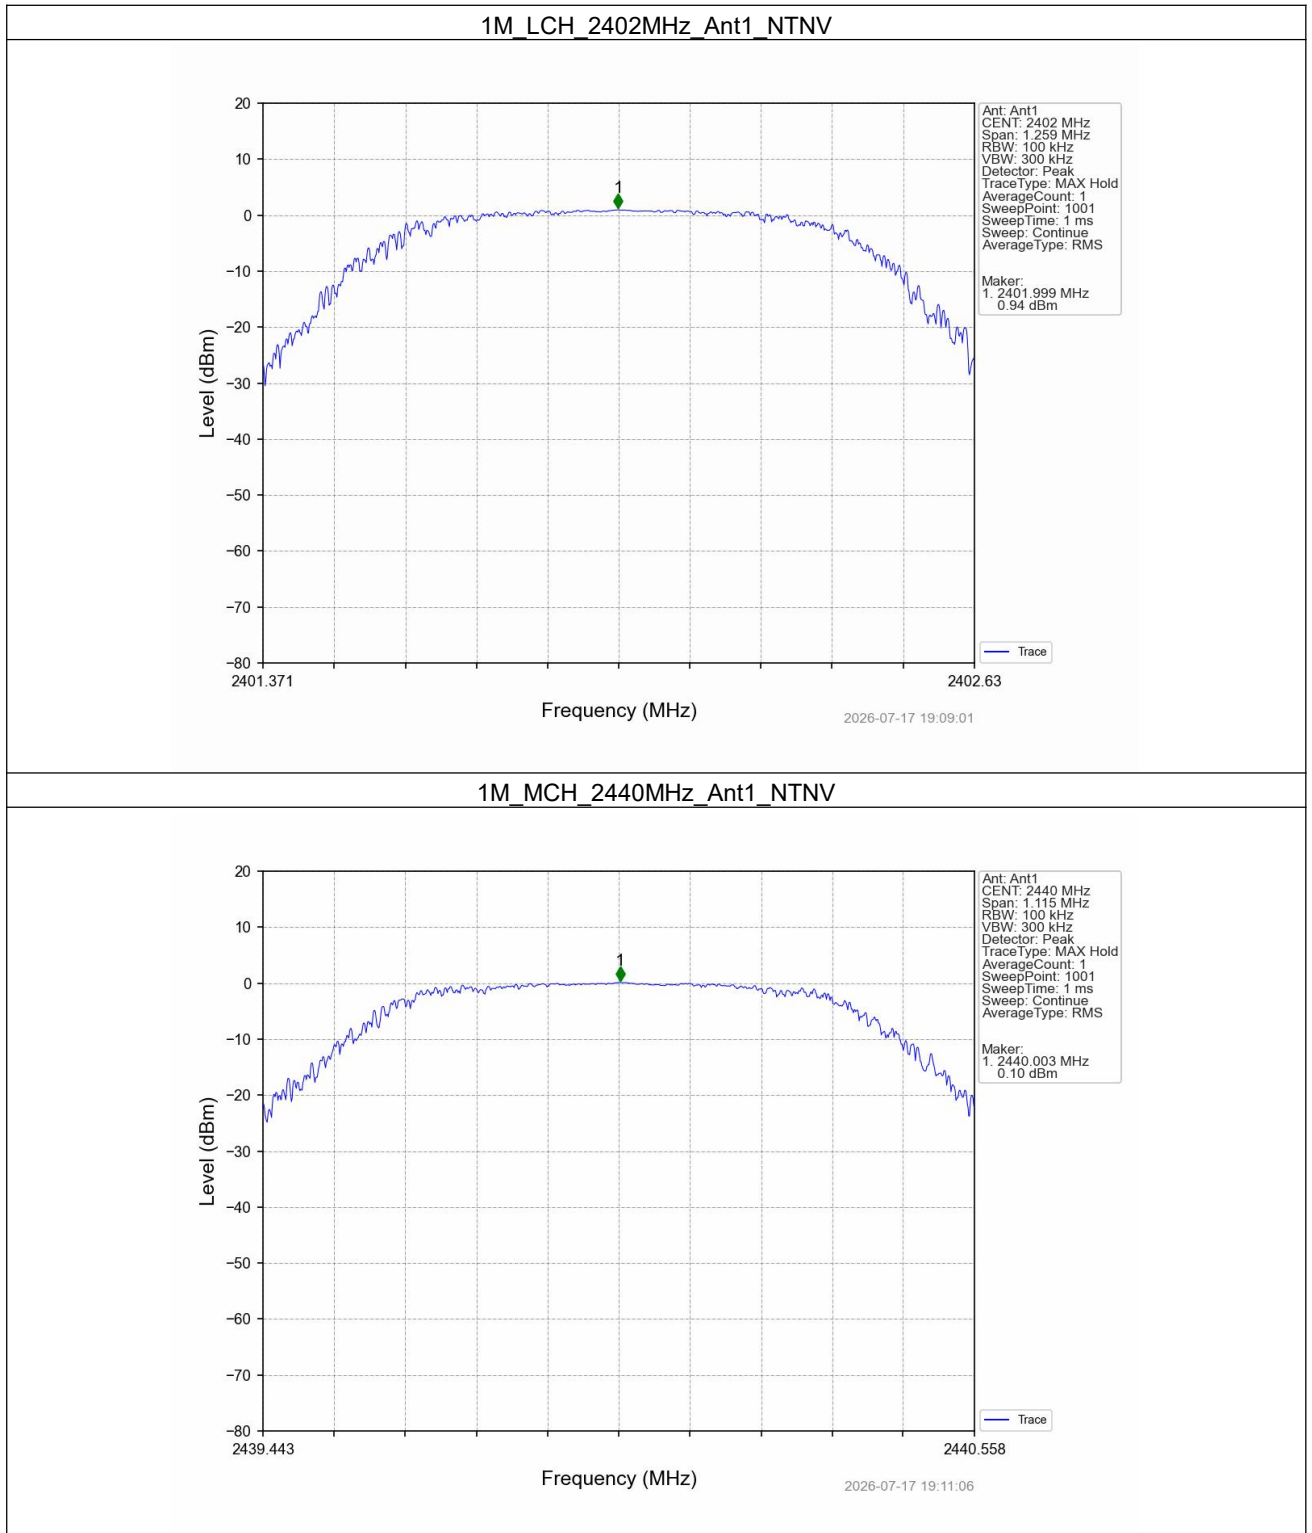

1M_HCH_2480MHz_Ant1_NTNV

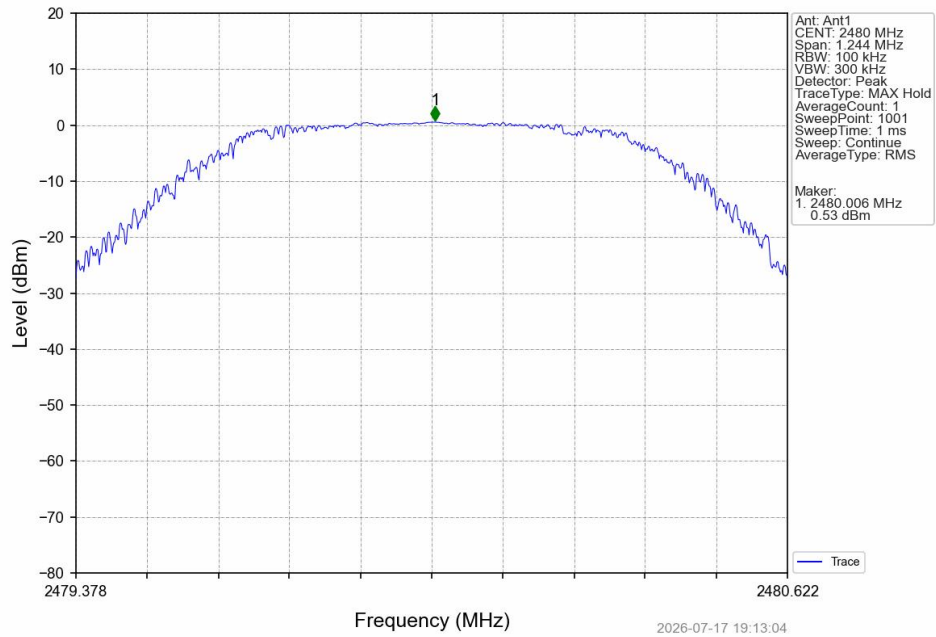


7.4. Conducted spurious emission


Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	0.90
		2440	1	0.10
		2480	1	0.53


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	0.90	-19.10	Pass
		2440	1	0.10	-19.90	Pass
		2480	1	0.53	-19.47	Pass

Test Graph

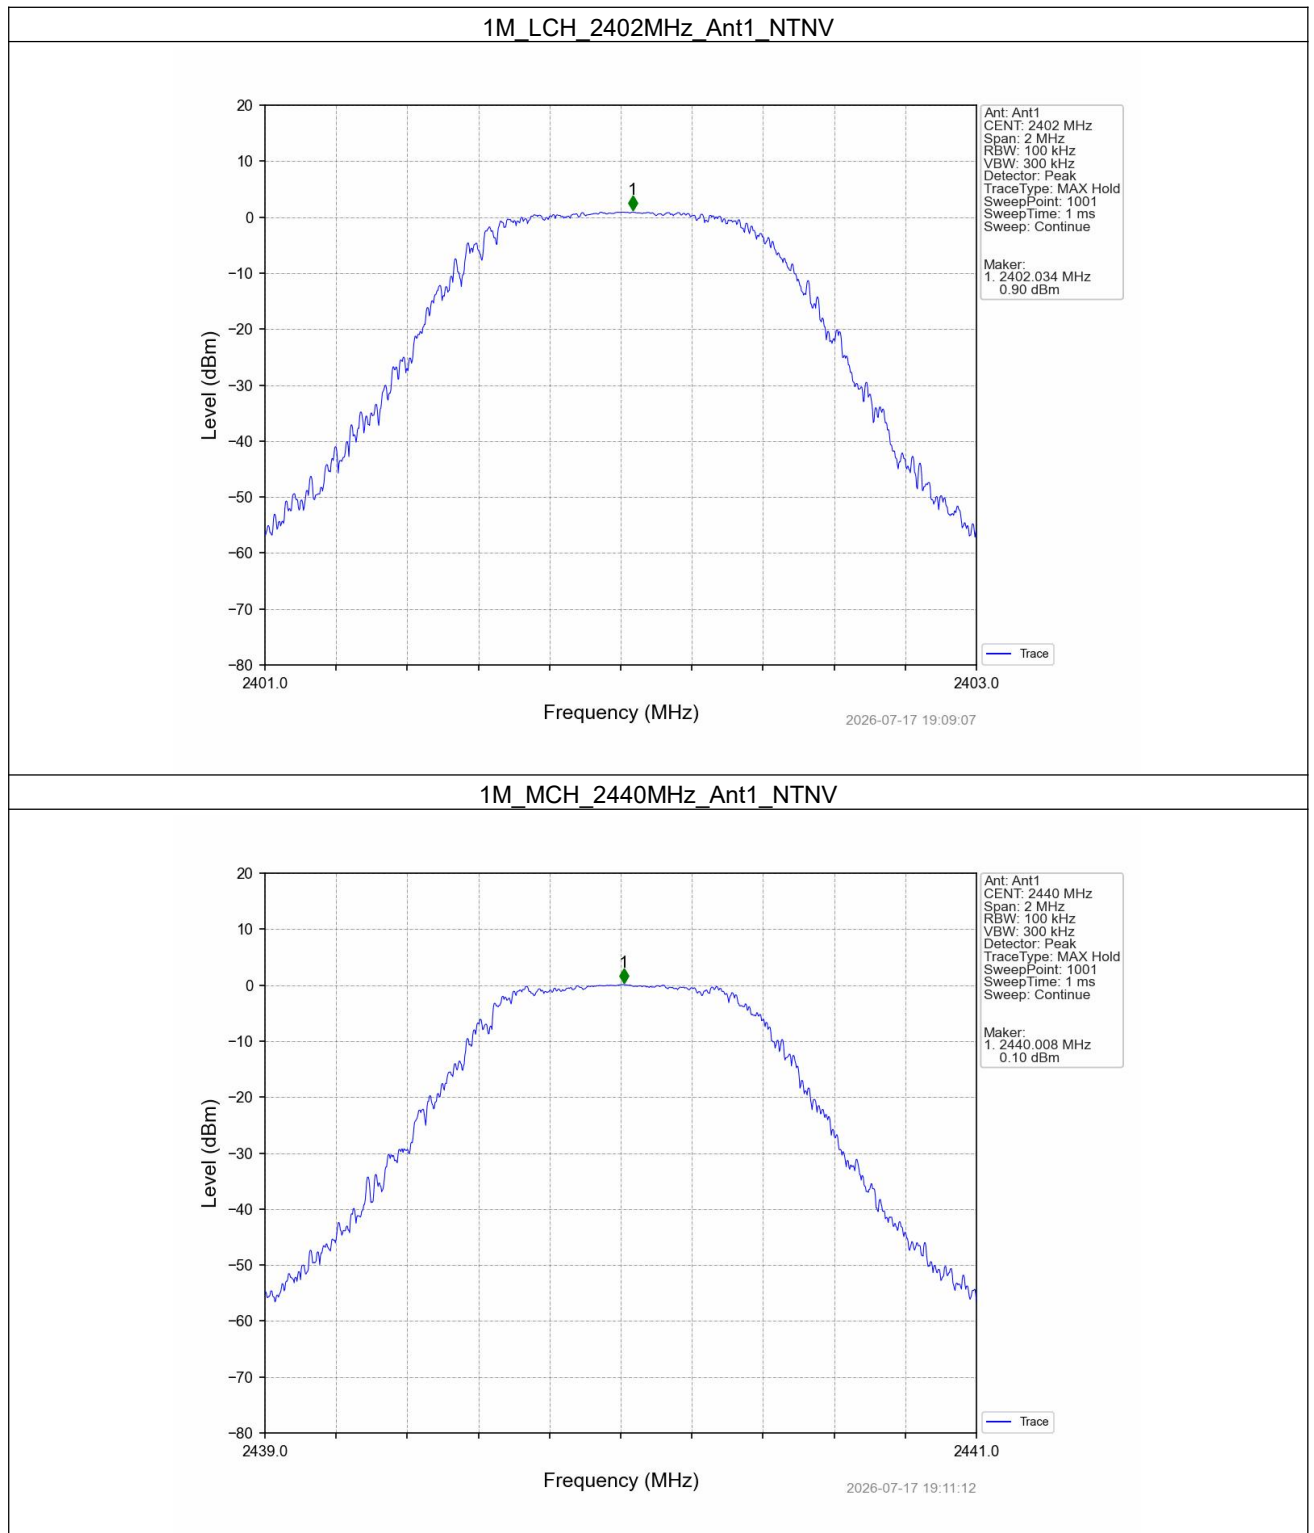


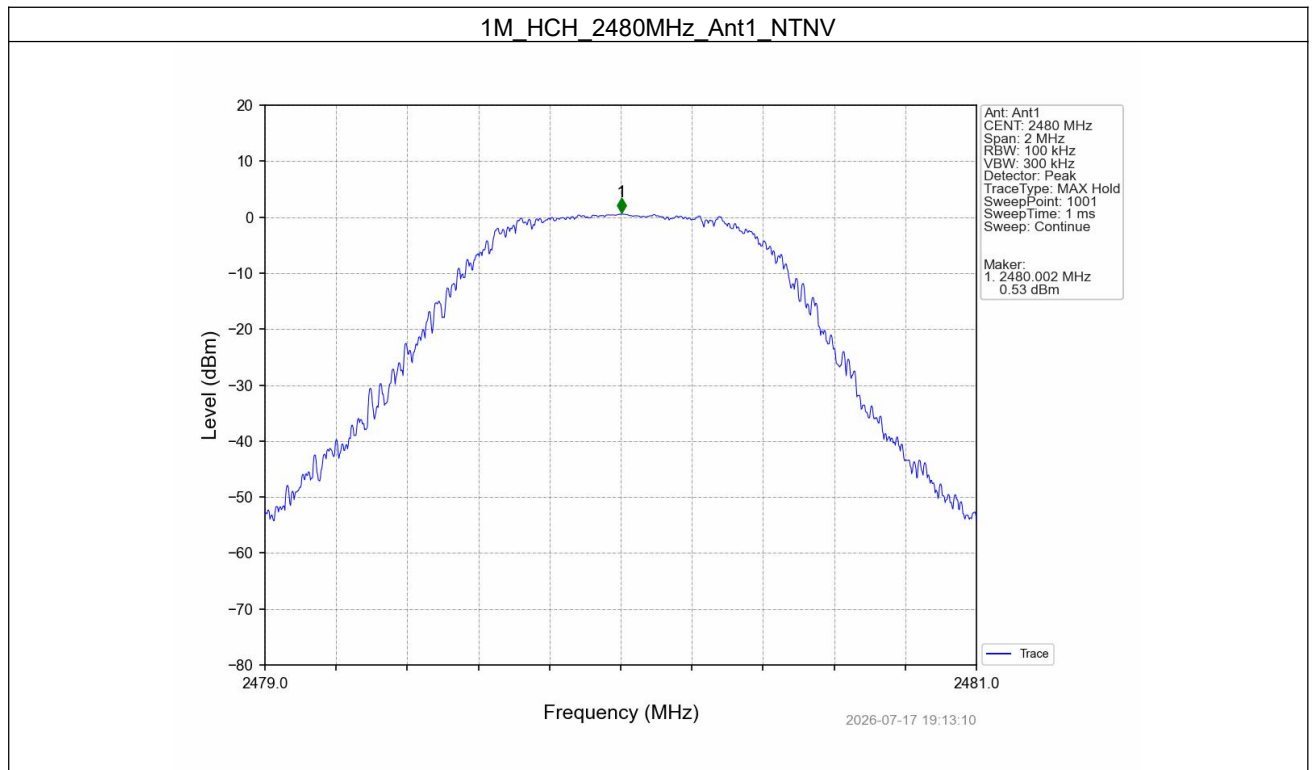


1M_LCH_2402MHz_Ant1_NTNV

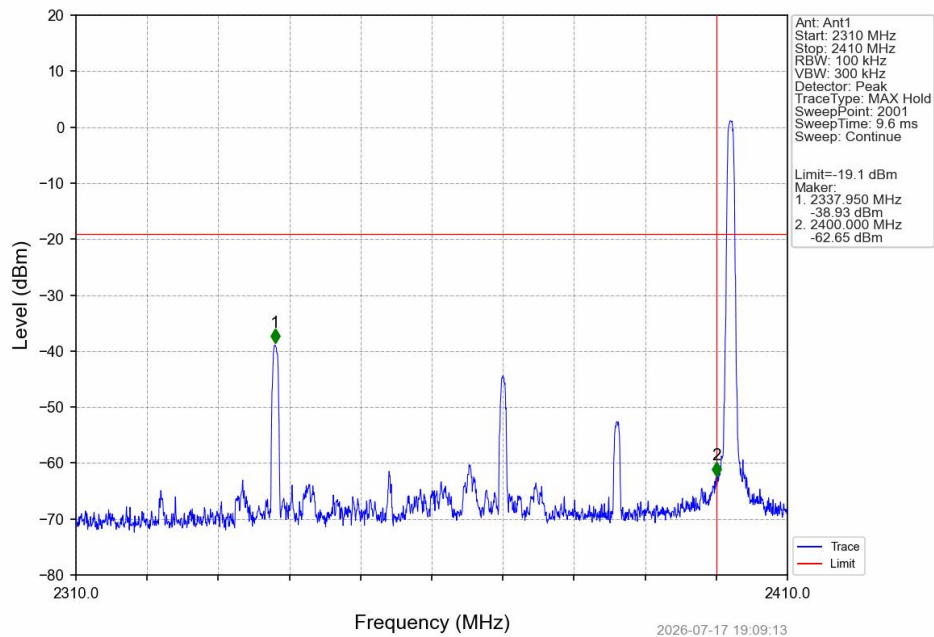


1M_LCH_2402MHz_Ant1_NTNV

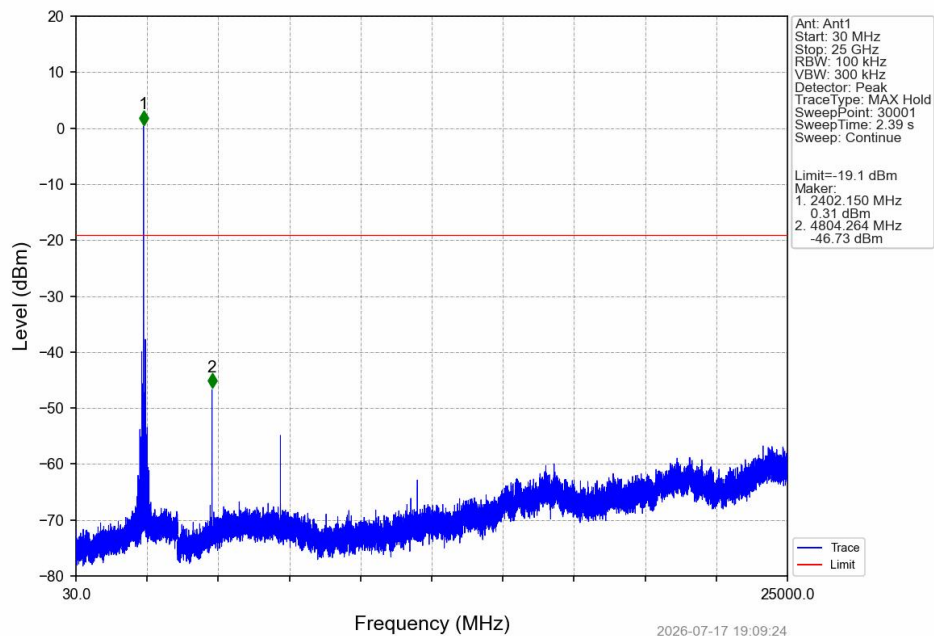


1M_MCH_2440MHz_Ant1_NTNV

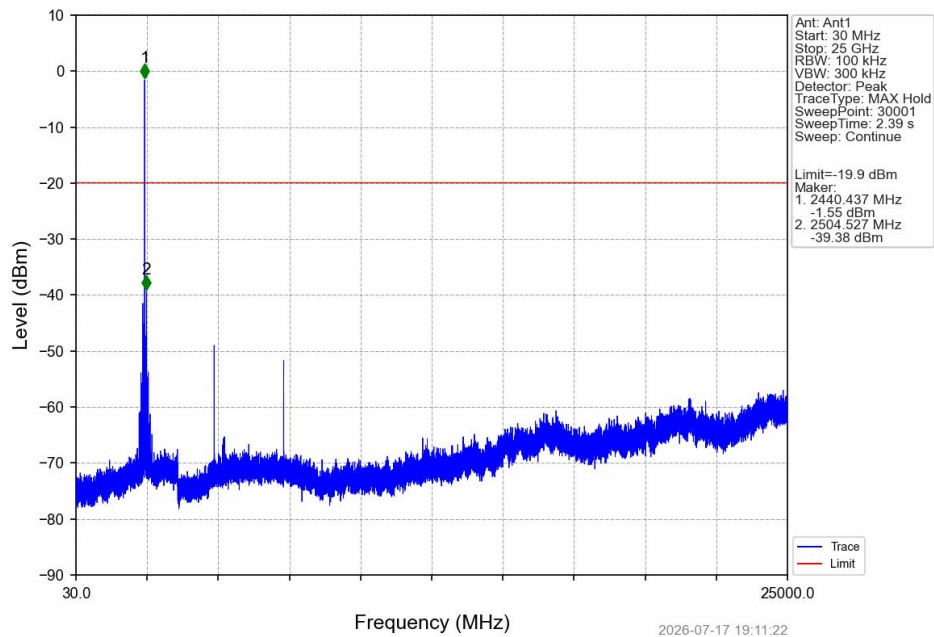

1M_HCH_2480MHz_Ant1_NTNV

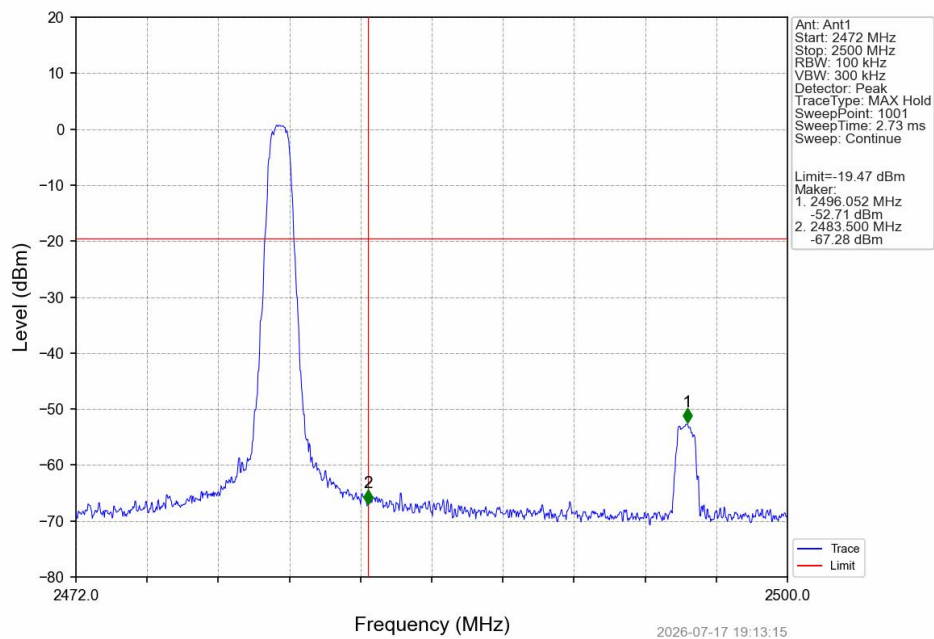

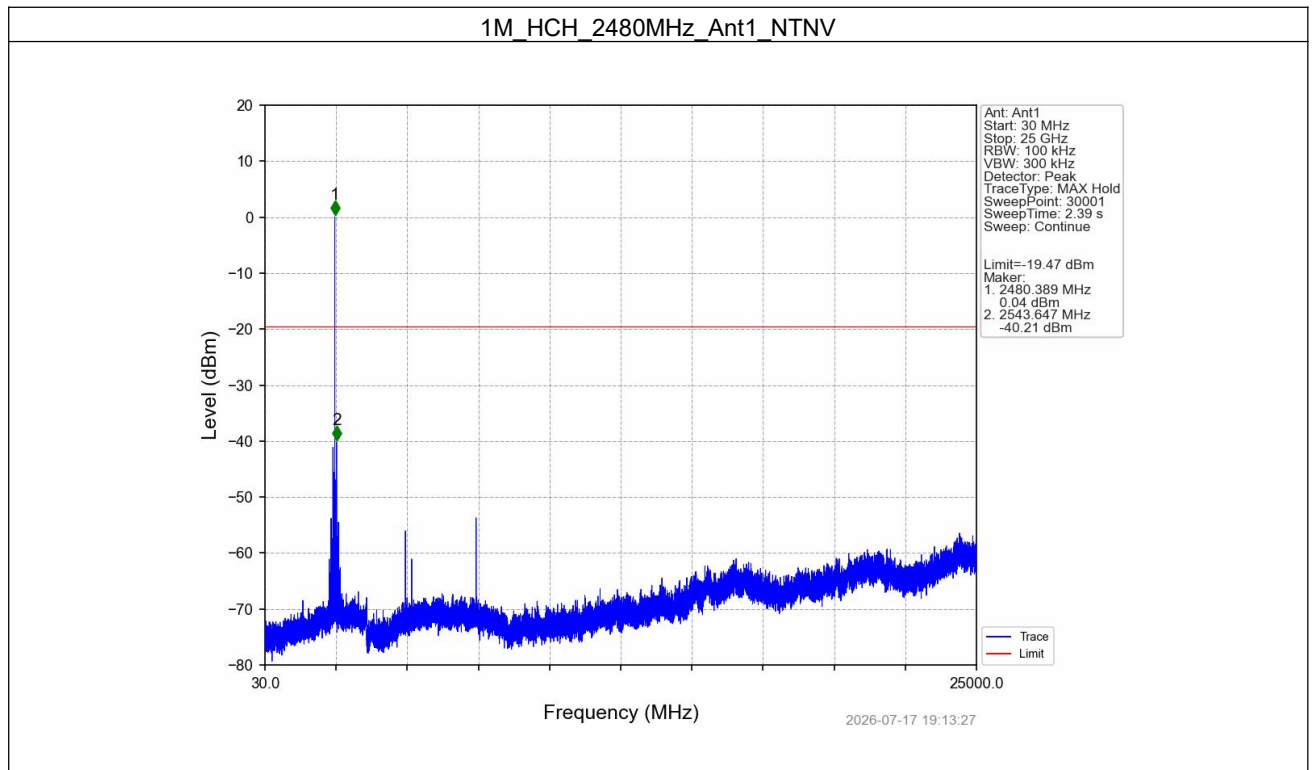

-----End of the report-----