

Appendix C(5G WIFI-RSE Above 1GHz Test Result)**Test Data****1GHz-40GHz****Environmental Conditions**


Temperature:	25.4 to 26.3 °C
Relative Humidity:	52 to 57 %
ATM Pressure:	99.3 to 100.2 kPa
Test Engineer:	Kevin Lv
Test Date:	2025-08-29 to 2025-09-05
EUT Operation Mode:	Transmitting

Test Result: Compliance, please refer to the below data.

Note 1: For 1GHz-6.6GHz, the fundamental with band reject filter.

Note 2: For 18GHz-40GHz, the maximum output power mode and channel: 802.11AX20 MIMO 5745MHz was tested.(Pre-scan)

802.11A Low Channel 1GHz-6.6GHz_HORIZONTAL

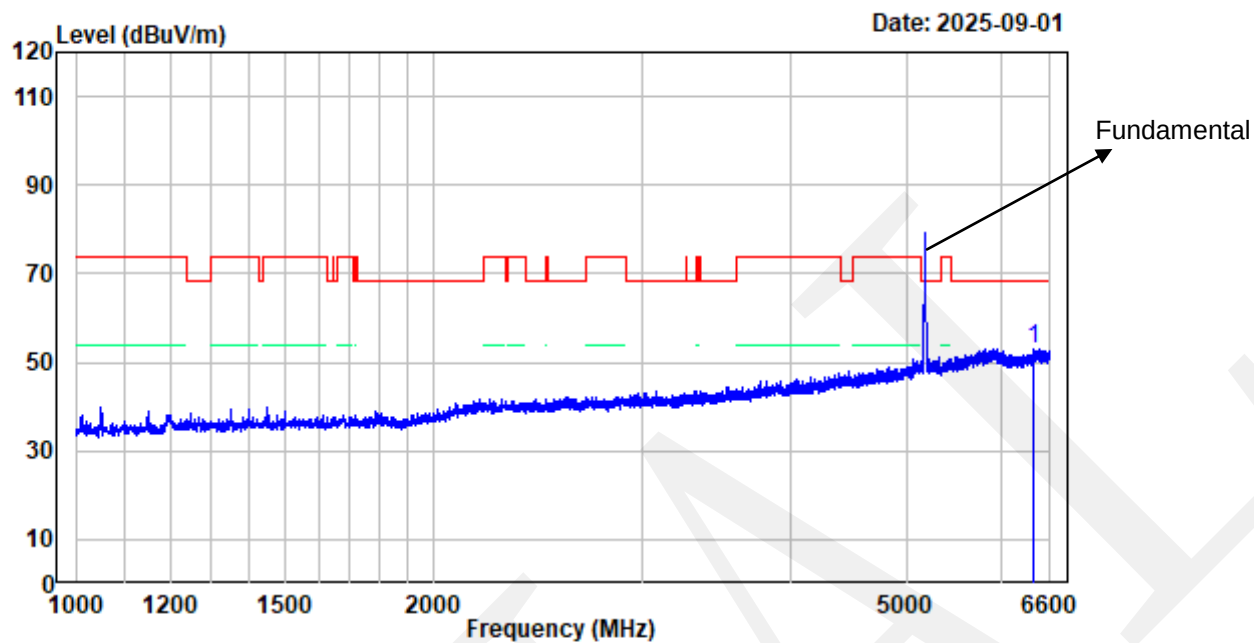

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5180MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6397.700	-3.71	56.85	53.14	68.20	-15.06	Peak


802.11A Low Channel 1GHz-6.6GHz_VERTICAL

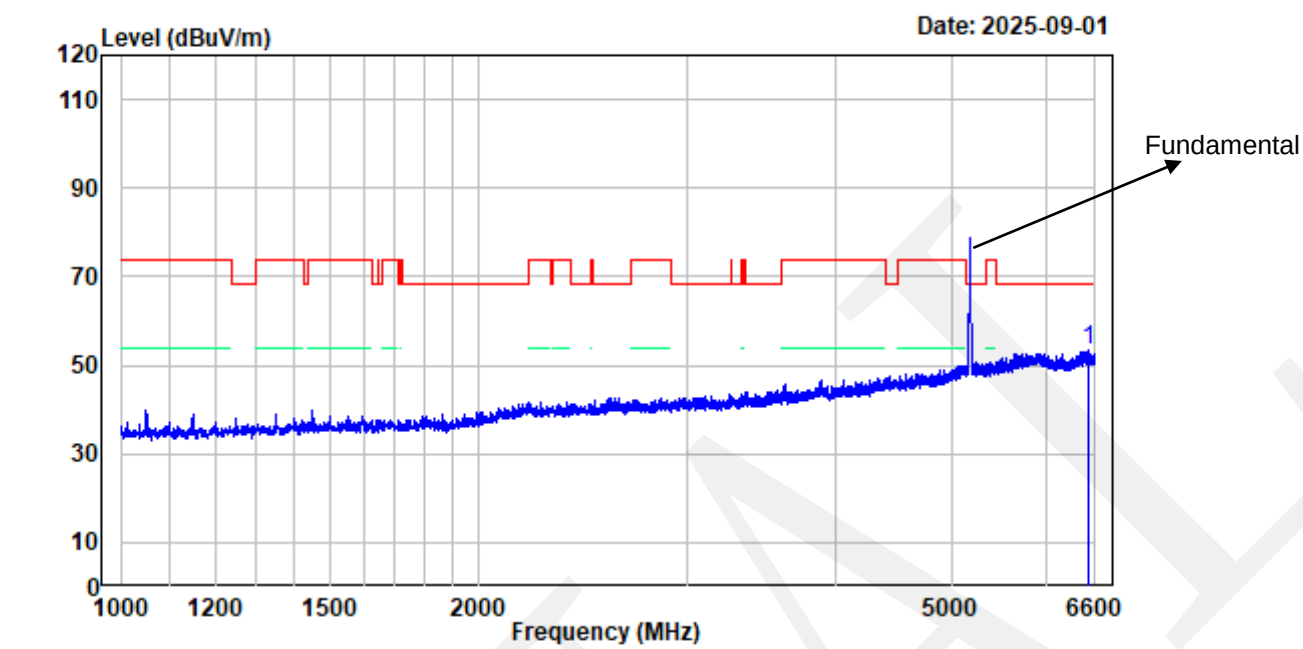

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5180MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6506.900	-3.82	57.16	53.34	68.20	-14.86 Peak

802.11A Low Channel 6.6GHz-18GHz_HORIZONTAL

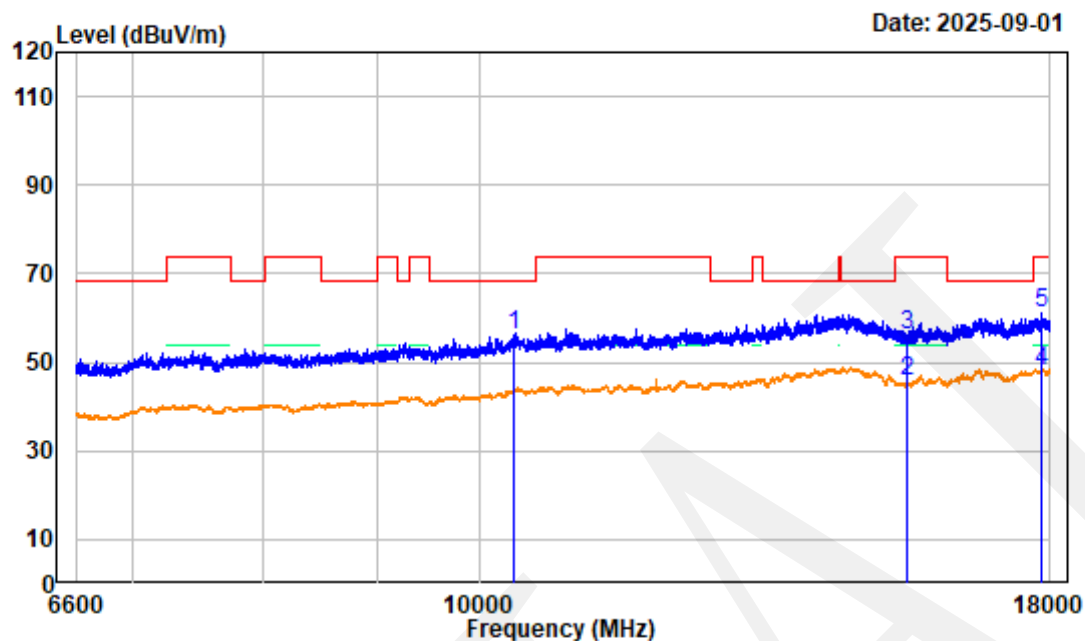

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5180MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.99	52.29	56.28	68.20	-11.92	peak
2	15540.000	4.85	40.85	45.70	54.00	-8.30	average
3	15540.000	4.85	51.42	56.27	74.00	-17.73	peak
4	17834.700	8.09	39.72	47.81	54.00	-6.19	Average
5	17834.700	8.09	53.21	61.30	74.00	-12.70	Peak

802.11A Low Channel 6.6GHz-18GHz_VERTICAL

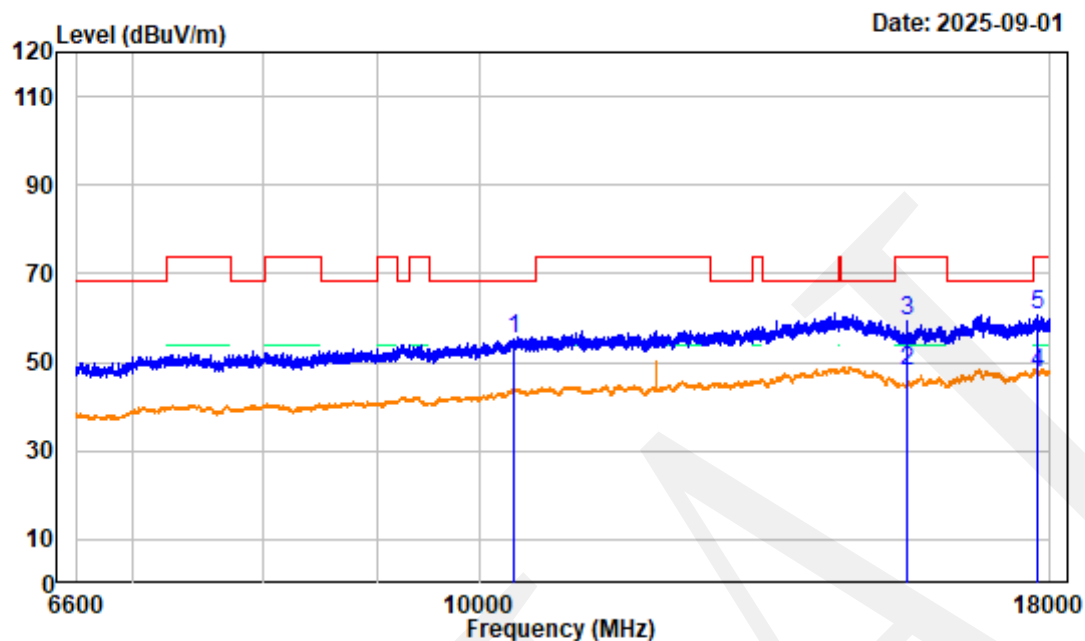

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5180MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.99	51.15	55.14	68.20	-13.06	peak
2	15540.000	4.85	43.32	48.17	54.00	-5.83	average
3	15540.000	4.85	54.63	59.48	74.00	-14.52	peak
4	17777.700	7.67	40.05	47.72	54.00	-6.28	Average
5	17777.700	7.67	52.82	60.49	74.00	-13.51	Peak

802.11A Low Channel Bandedge_HORIZONTAL

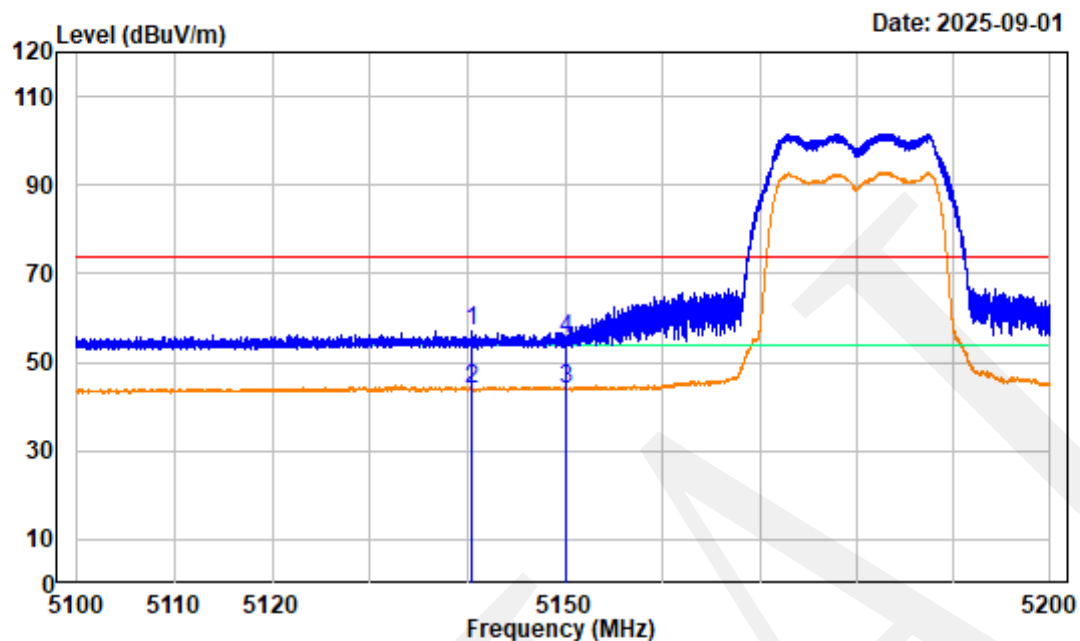

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5180MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5140.313	-6.02	63.09	57.07	74.00	-16.93	Peak
2	5140.313	-6.02	50.01	43.99	54.00	-10.01	Average
3	5150.000	-6.04	50.01	43.97	54.00	-10.03	average
4	5150.000	-6.04	61.28	55.24	74.00	-18.76	peak

802.11A Low Channel Bandedge_VERTICAL

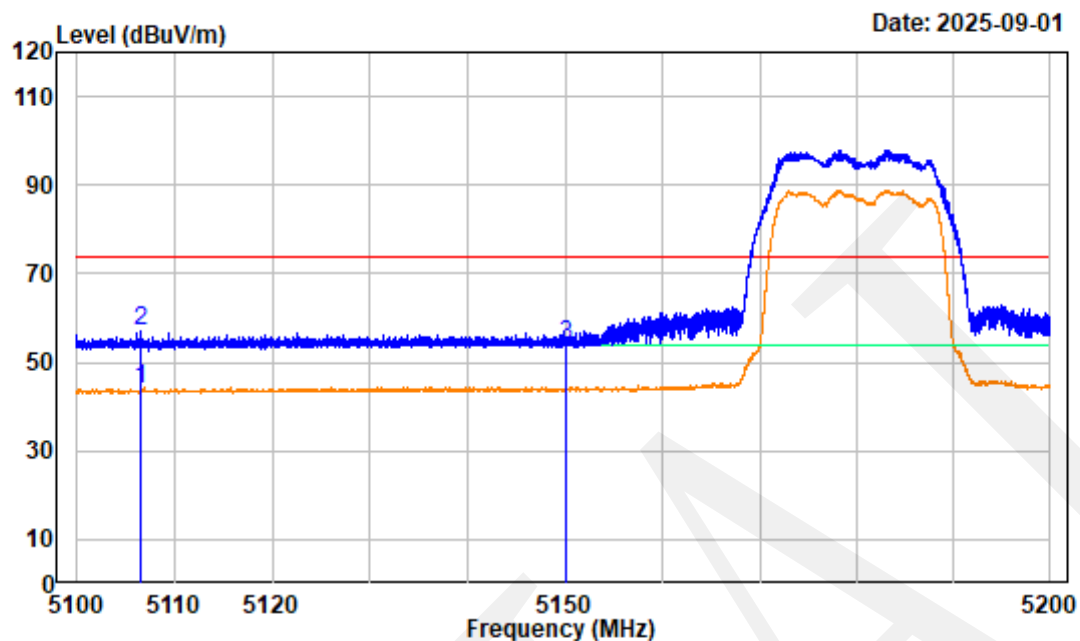

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5180MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5106.587	-5.97	50.00	44.03	54.00	-9.97	Average
2	5106.587	-5.97	63.03	57.06	74.00	-16.94	Peak
3	5150.000	-6.04	60.00	53.96	74.00	-20.04	peak

802.11A Middle Channel 1GHz-6.6GHz_HORIZONTAL

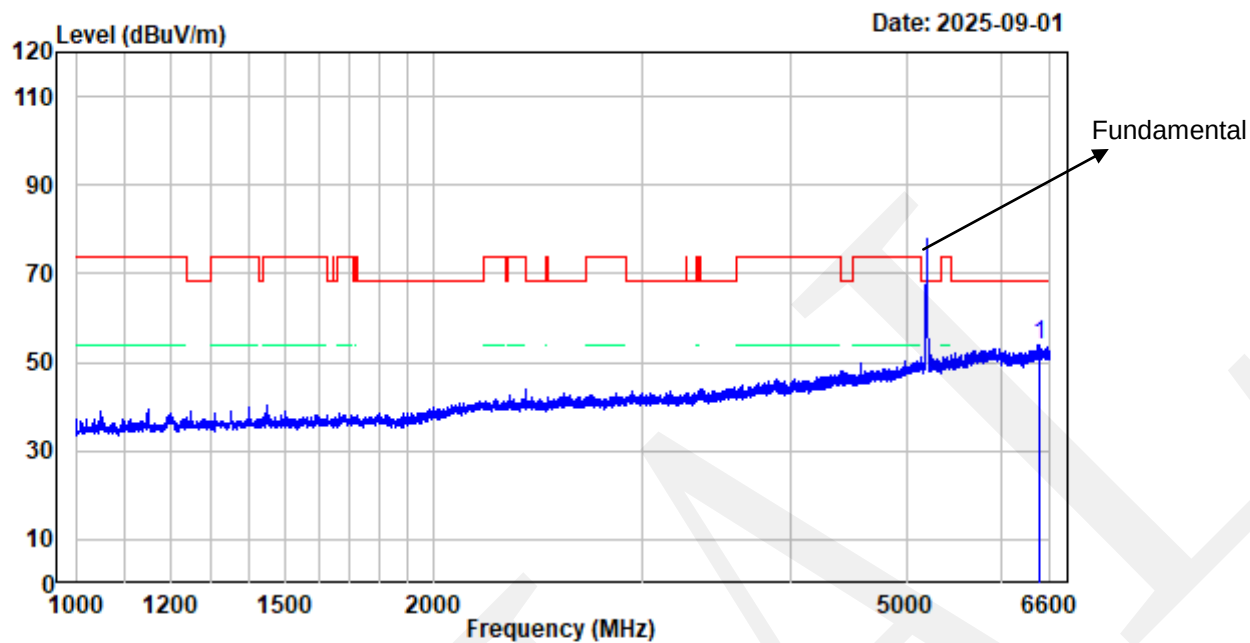

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Middle Channel 5200MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6460.000	-3.53	57.31	53.78	68.20	-14.42 Peak

802.11A Middle Channel 1GHz-6.6GHz_VERTICAL

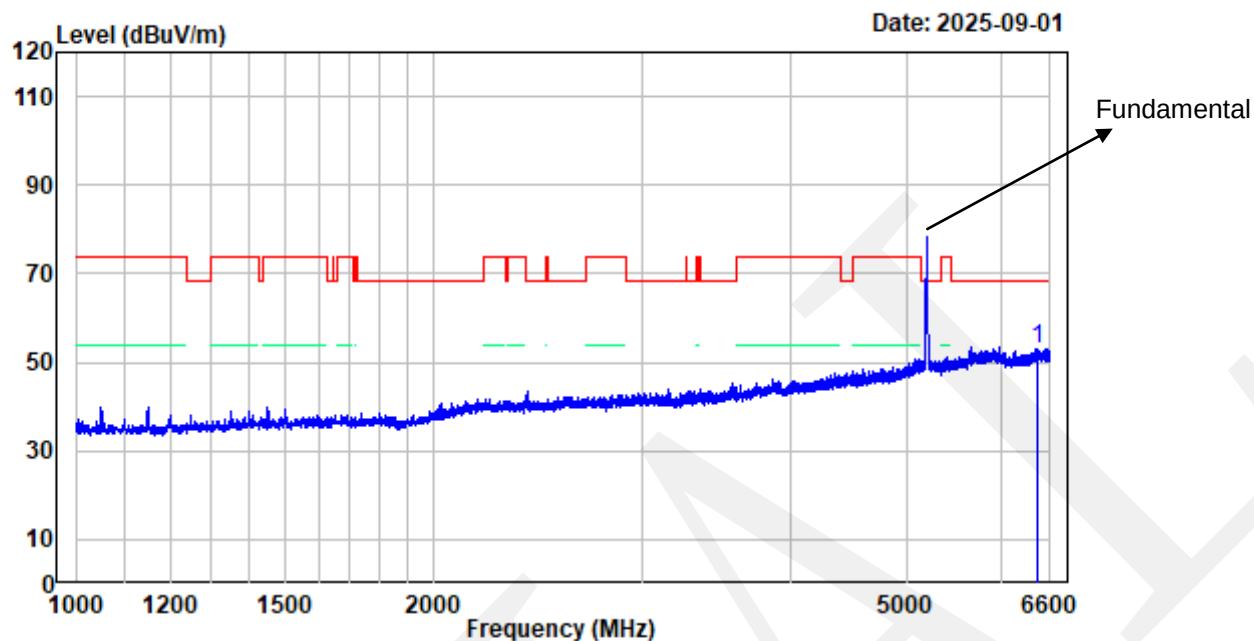

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Middle Channel 5200MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6441.800	-3.48	56.65	53.17	68.20	-15.03 Peak

802.11A Middle Channel 6.6GHz-18GHz_HORIZONTAL

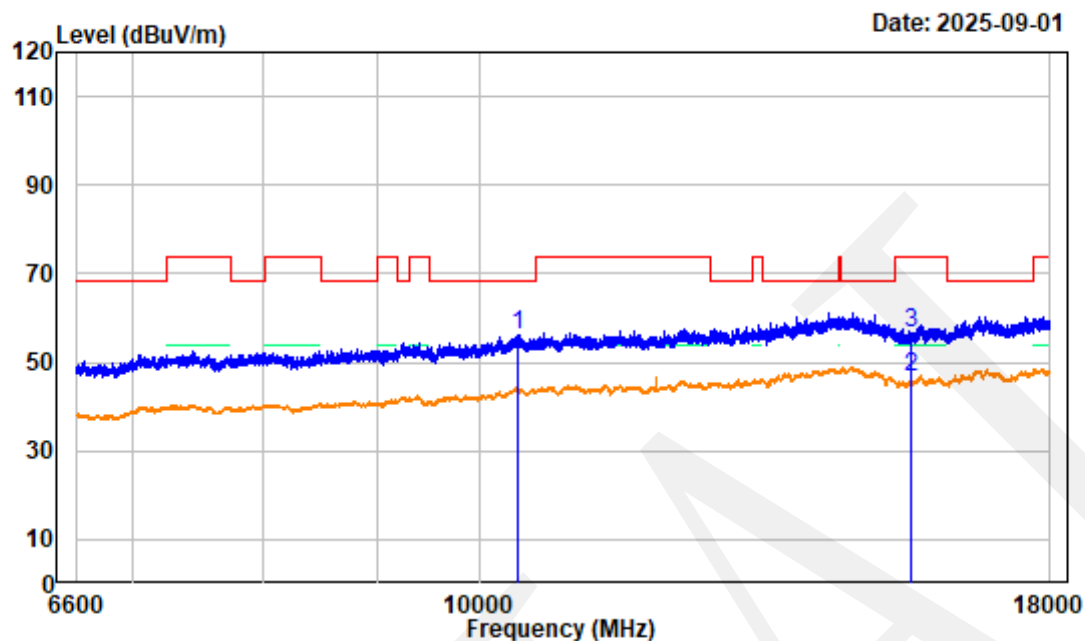

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Middle Channel 5200MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.18	51.84	56.02	68.20	-12.18	peak
2	15600.000	4.69	41.81	46.50	54.00	-7.50	average
3	15600.000	4.69	51.86	56.55	74.00	-17.45	peak

802.11A Middle Channel 6.6GHz-18GHz_VERTICAL

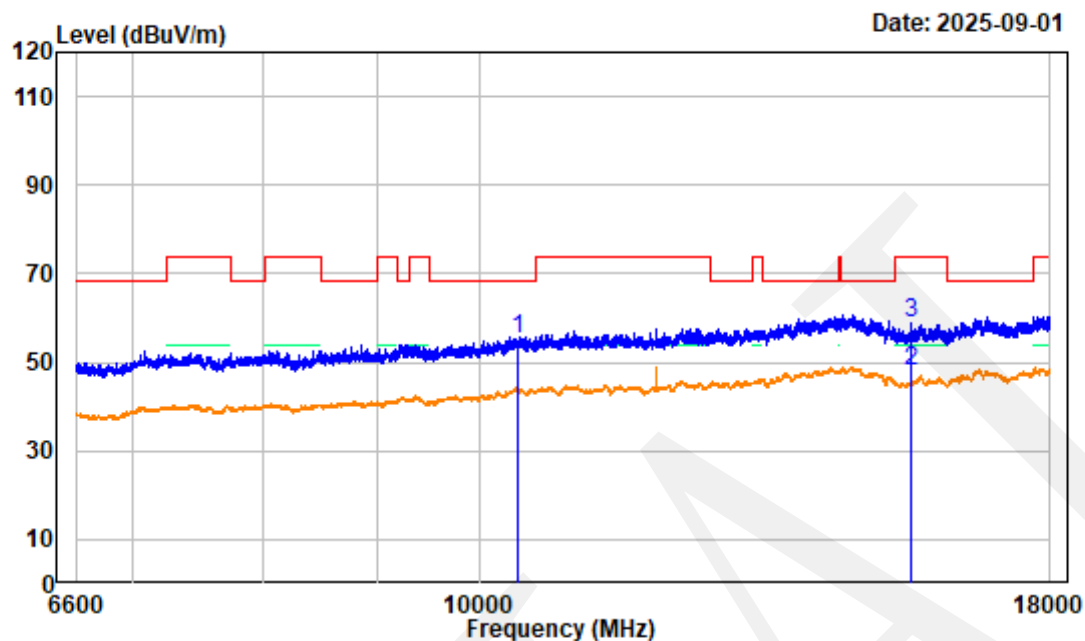

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Middle Channel 5200MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10400.000	4.18	51.25	55.43	68.20	-12.77	peak
2 15600.000	4.69	43.21	47.90	54.00	-6.10	average
3 15600.000	4.69	54.25	58.94	74.00	-15.06	peak

802.11A High Channel 1GHz-6.6GHz_HORIZONTAL

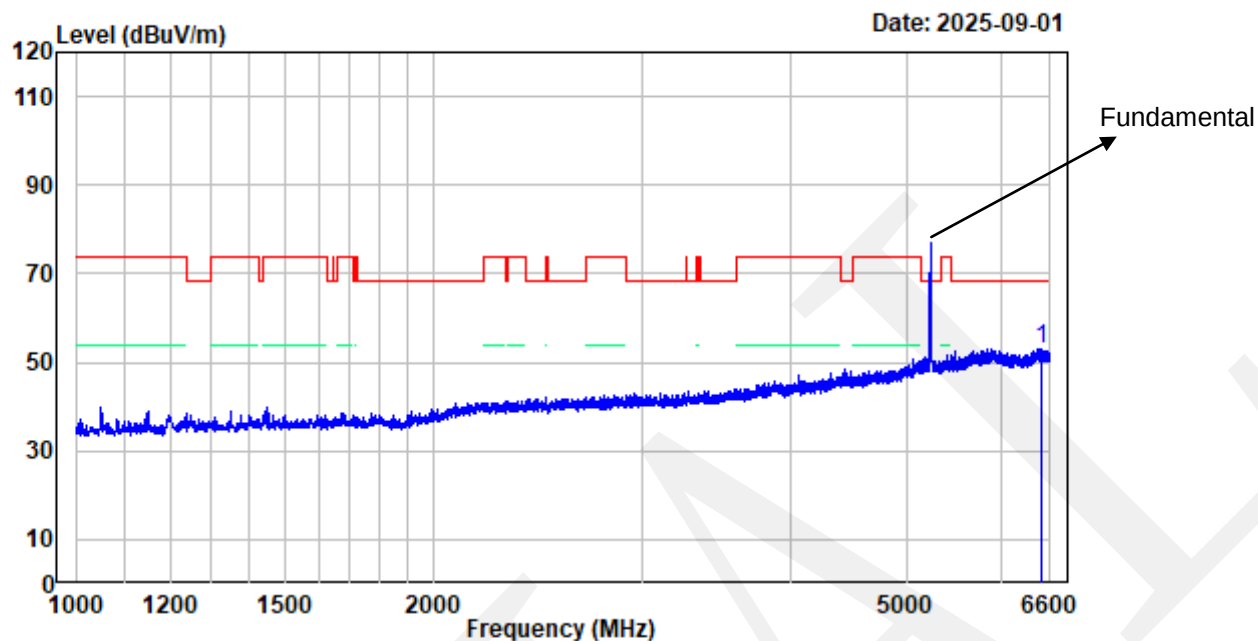

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5240MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6483.100	-3.72	56.90	53.18	68.20	-15.02 Peak

802.11A High Channel 1GHz-6.6GHz_VERTICAL

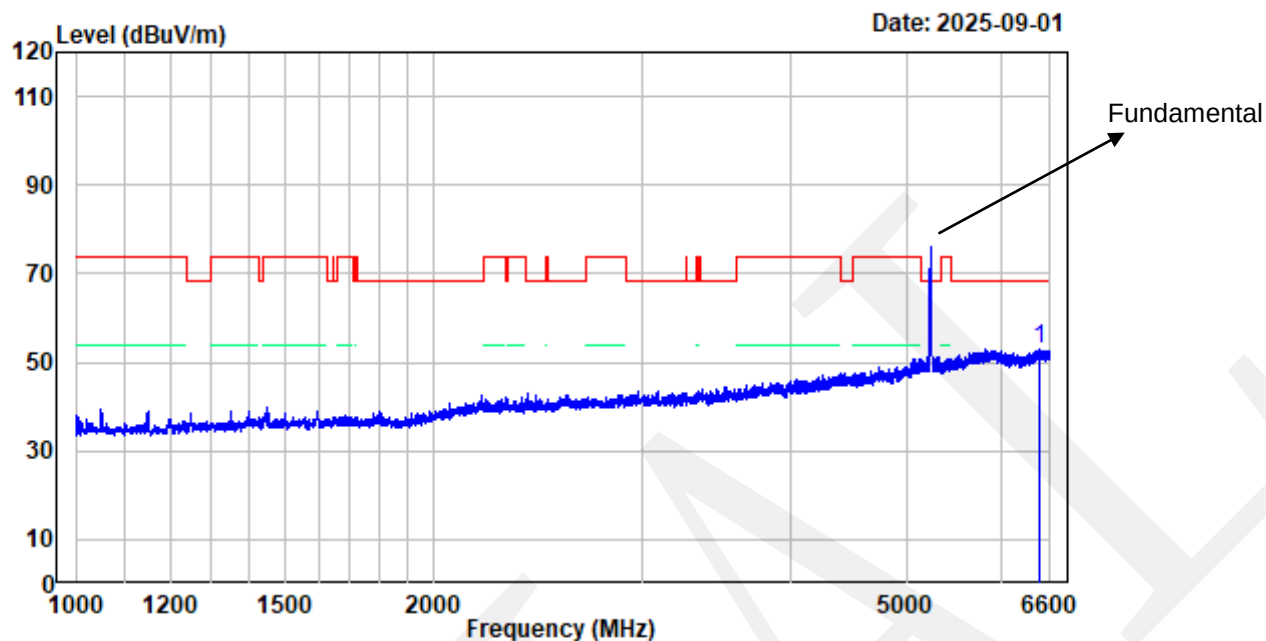

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5240MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6457.200	-3.51	56.56	53.05	68.20	-15.15 Peak

802.11A High Channel 6.6GHz-18GHz_HORIZONTAL

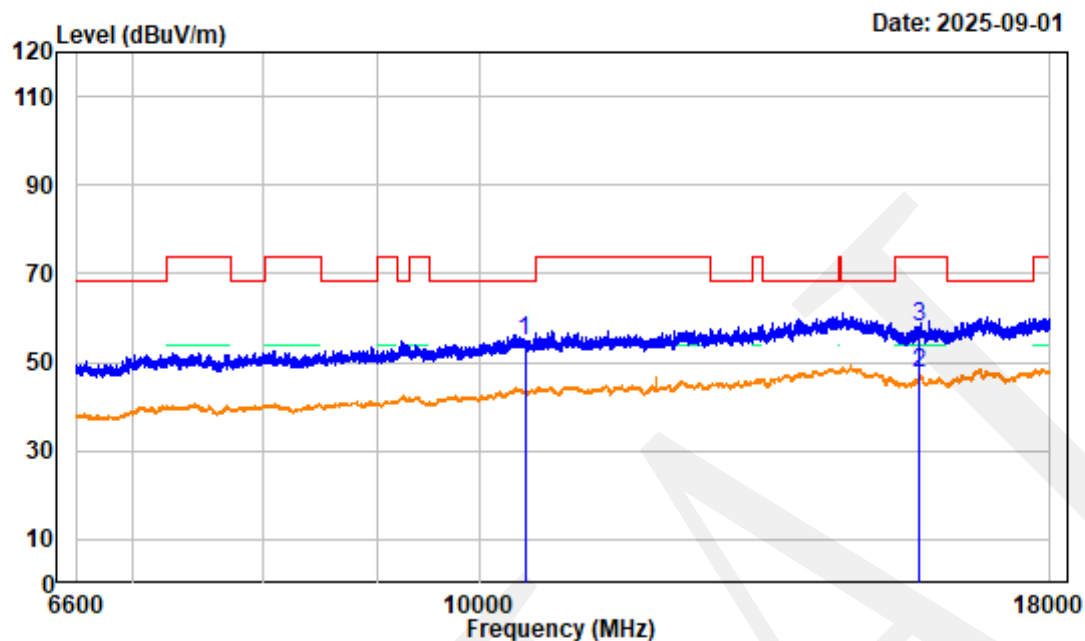

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5240MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	4.01	50.71	54.72	68.20	-13.48	peak
2	15720.000	4.85	42.75	47.60	54.00	-6.40	average
3	15720.000	4.85	52.90	57.75	74.00	-16.25	peak

802.11A High Channel 6.6GHz-18GHz_VERTICAL

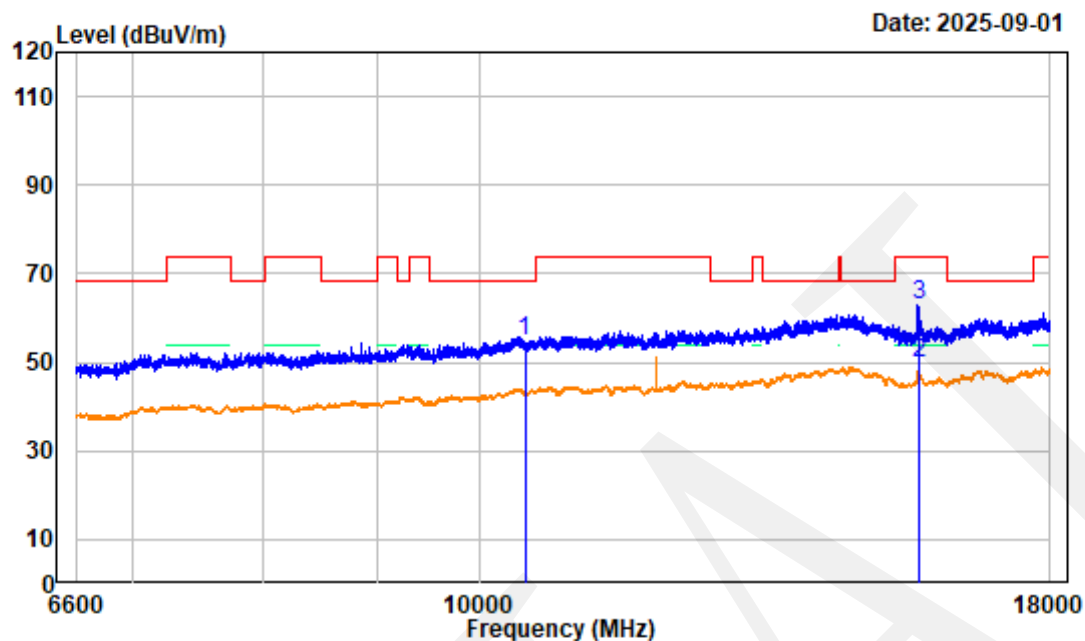

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5240MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	4.01	50.65	54.66	68.20	-13.54	peak
2	15720.000	4.85	44.95	49.80	54.00	-4.20	average
3	15720.000	4.85	58.00	62.85	74.00	-11.15	peak

802.11A High Channel Bandedge_HORIZONTAL

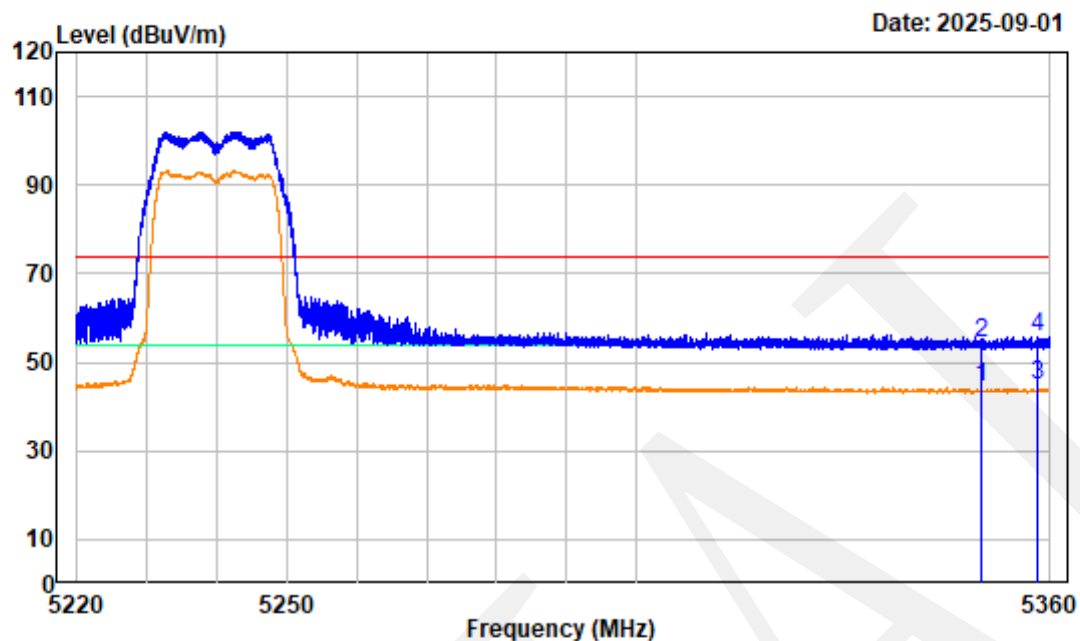

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5240MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	50.03	44.34	54.00	-9.66	average
2	5350.000	-5.69	60.10	54.41	74.00	-19.59	peak
3	5358.303	-5.64	50.50	44.86	54.00	-9.14	Average
4	5358.303	-5.64	61.55	55.91	74.00	-18.09	Peak


802.11A High Channel Bandedge_VERTICAL

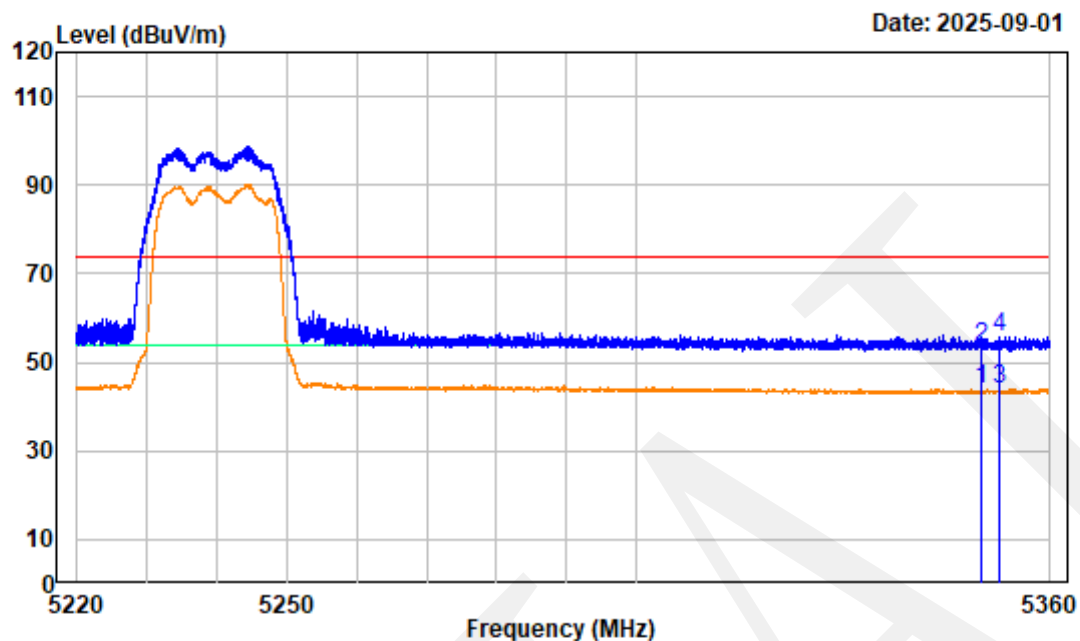

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504U35143E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11A High Channel 5240MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	49.58	43.89	54.00	-10.11	Average
2	5350.000	-5.69	59.32	53.63	74.00	-20.37	peak
3	5352.510	-5.67	49.70	44.03	54.00	-9.97	Average
4	5352.510	-5.67	61.53	55.86	74.00	-18.14	Peak


802.11AC20 Low Channel 1GHz-6.6GHz_HORIZONTAL

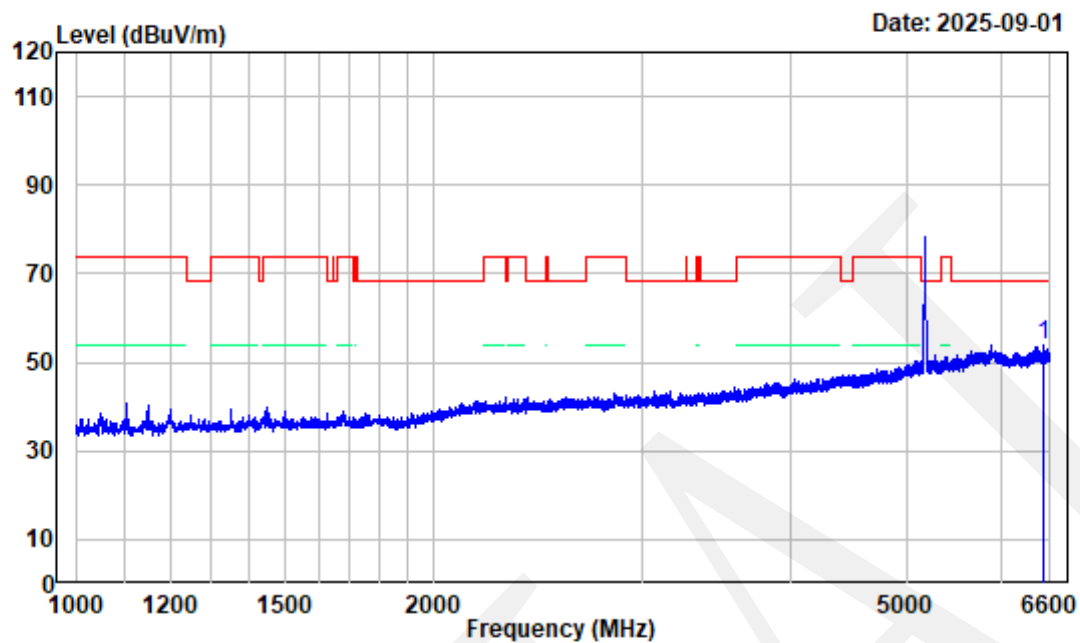

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5180MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6515.300	-3.78	57.67	53.89	68.20	-14.31	Peak


802.11AC20 Low Channel 1GHz-6.6GHz_VERTICAL

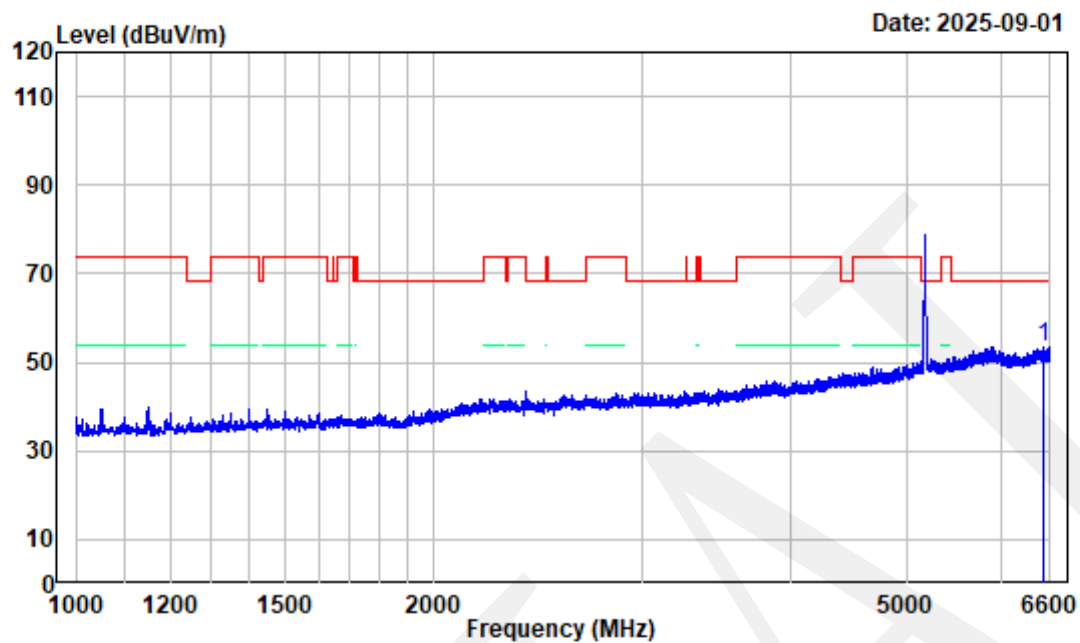

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5180MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6511.100	-3.81	57.06	53.25	68.20	-14.95 Peak

802.11AC20 Low Channel 6.6GHz-18GHz_HORIZONTAL

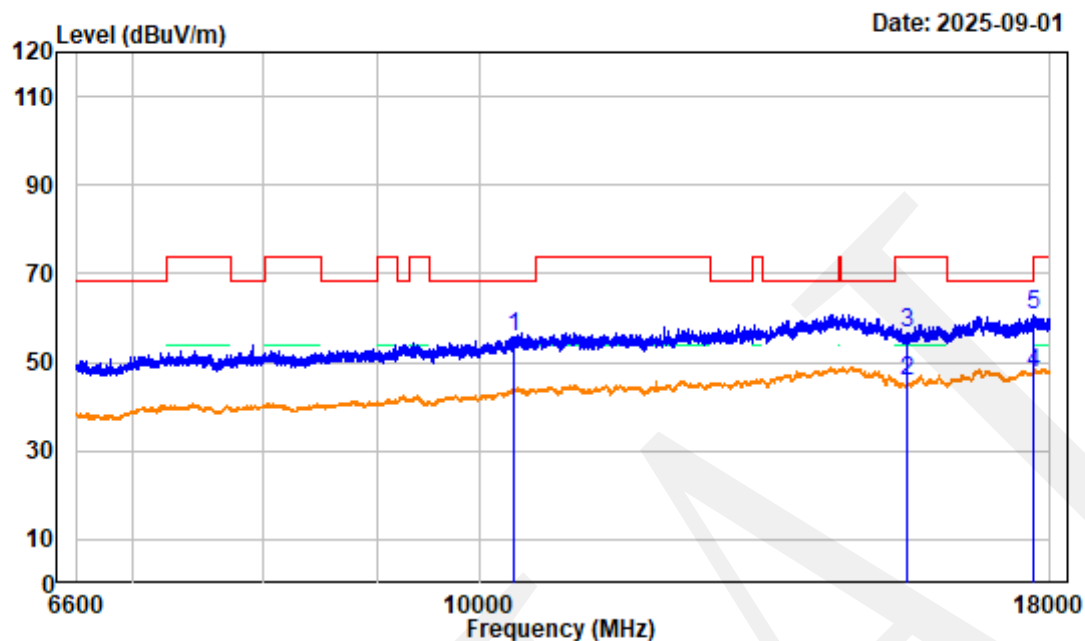

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5180MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.99	51.54	55.53	68.20	-12.67	peak
2	15540.000	4.85	40.81	45.66	54.00	-8.34	average
3	15540.000	4.85	51.84	56.69	74.00	-17.31	peak
4	17712.150	7.67	39.82	47.49	54.00	-6.51	Average
5	17712.150	7.67	52.90	60.57	74.00	-13.43	Peak

802.11AC20 Low Channel 6.6GHz-18GHz_VERTICAL

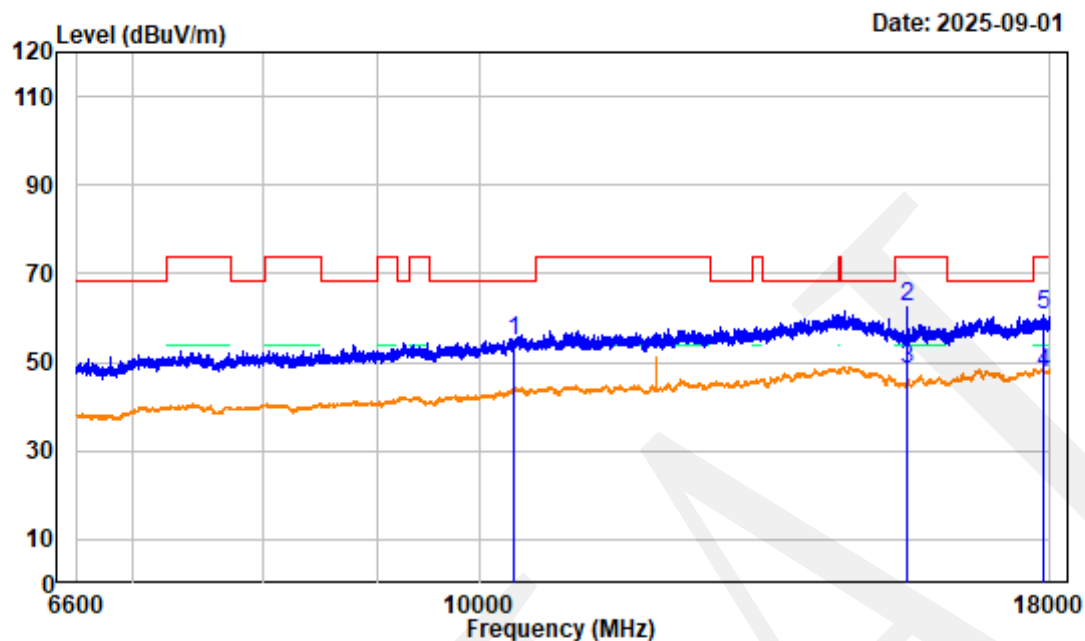

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5180MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.99	50.93	54.92	68.20	-13.28	peak
2	15527.630	4.81	57.53	62.34	74.00	-11.66	Peak
3	15527.630	4.81	43.48	48.29	54.00	-5.71	Average
4	17877.450	8.28	39.32	47.60	54.00	-6.40	Average
5	17877.450	8.28	52.19	60.47	74.00	-13.53	Peak

802.11AC20 Low Channel Bandedge_HORIZONTAL

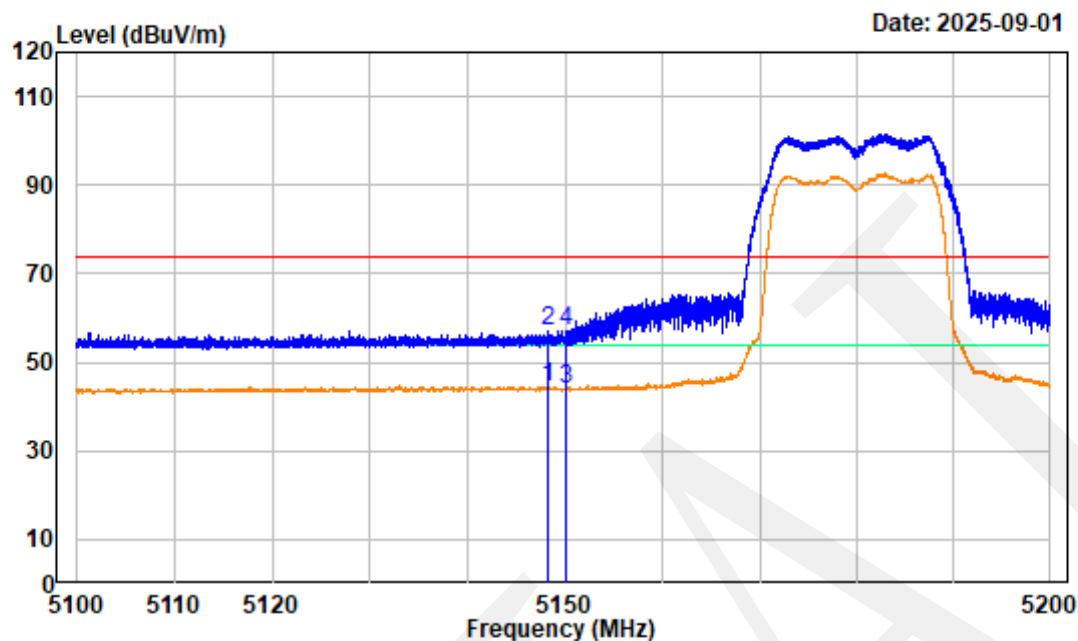

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5180MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.175	-6.04	50.21	44.17	54.00	-9.83	Average
2	5148.175	-6.04	63.25	57.21	74.00	-16.79	Peak
3	5150.000	-6.04	49.95	43.91	54.00	-10.09	average
4	5150.000	-6.04	63.02	56.98	74.00	-17.02	peak

802.11AC20 Low Channel Bandedge_VERTICAL

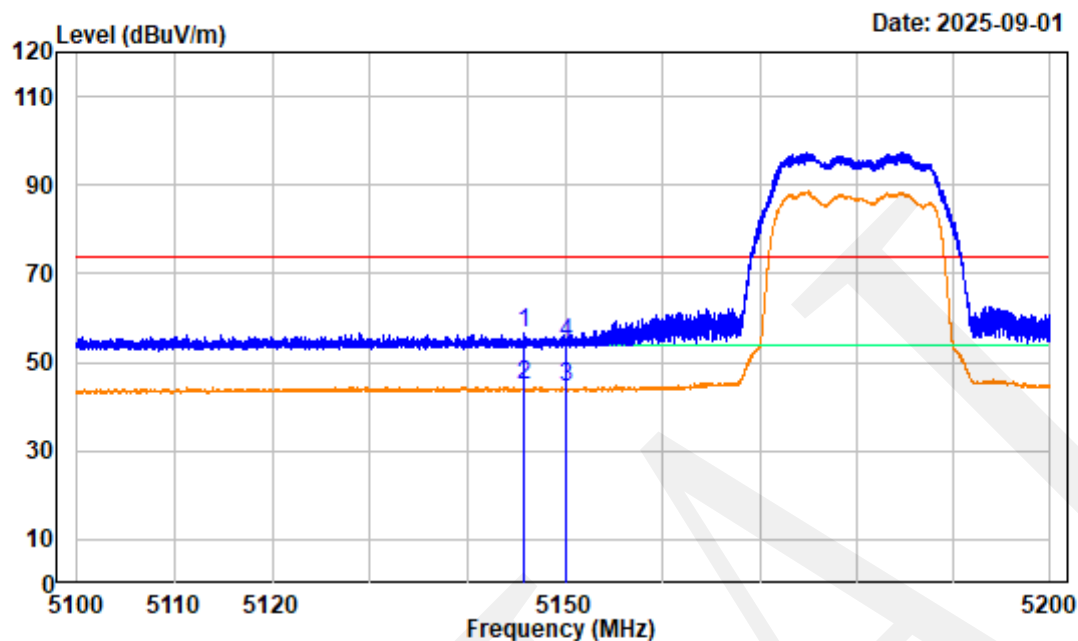

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5180MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5145.813	-6.03	62.72	56.69	74.00	-17.31	Peak
2	5145.813	-6.03	50.69	44.66	54.00	-9.34	Average
3	5150.000	-6.04	50.32	44.28	54.00	-9.72	average
4	5150.000	-6.04	60.38	54.34	74.00	-19.66	peak

802.11AC20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

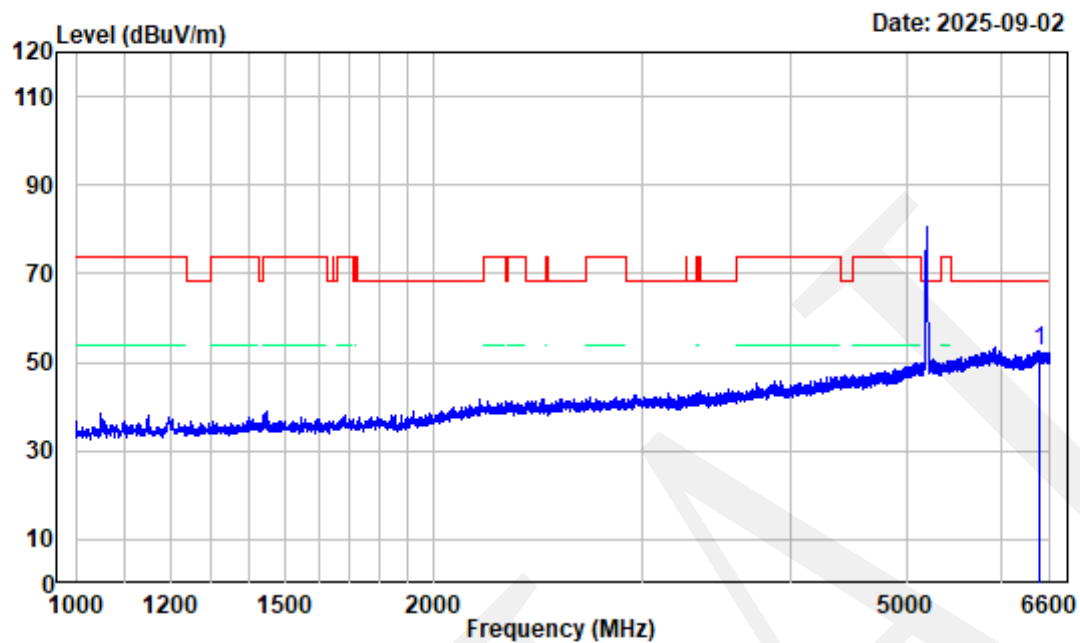


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting
Note : 802.11AC20 Middle Channel 5200MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Tester:Kevin Lv

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6472.600	-3.63	55.98	52.35	68.20	-15.85 Peak


802.11AC20 Middle Channel 1GHz-6.6GHz_VERTICAL

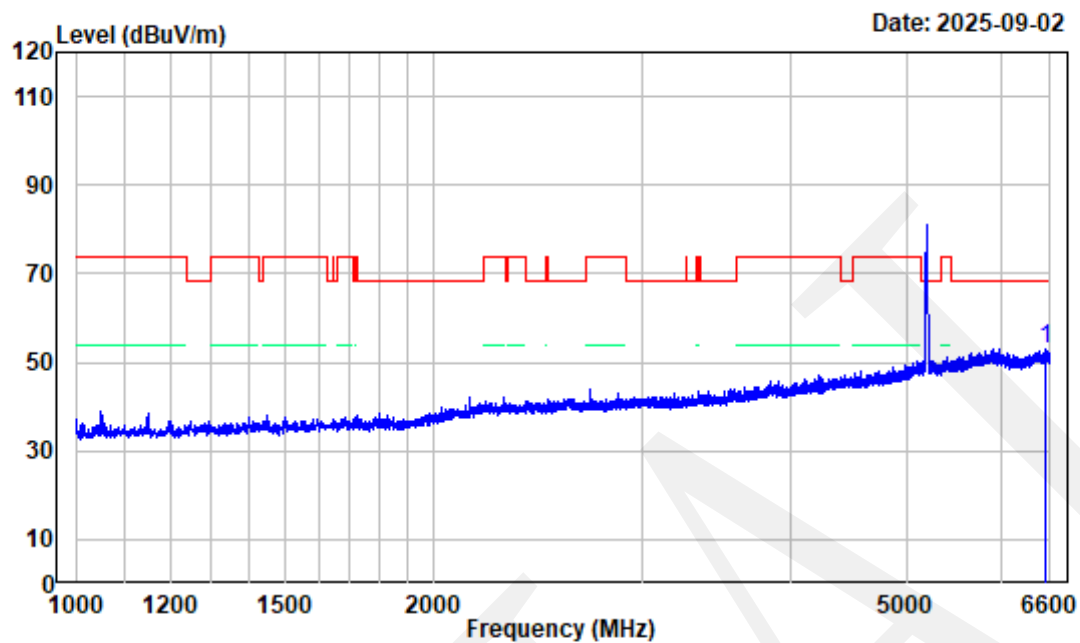

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting
Note : 802.11AC20 Middle Channel 5200MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz
Tester:Kevin Lv

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6530.700	-3.72	56.83	53.11	68.20	-15.09 Peak

802.11AC20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

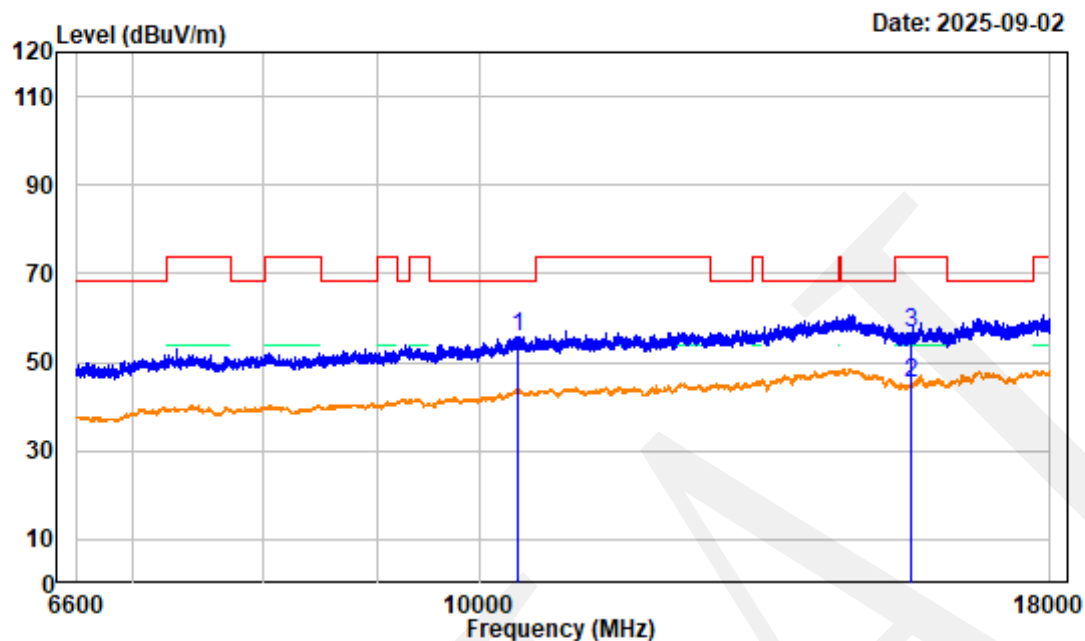

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Middle Channel 5200MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.18	51.51	55.69	68.20	-12.51	peak
2	15600.000	4.69	40.71	45.40	54.00	-8.60	average
3	15600.000	4.69	51.78	56.47	74.00	-17.53	peak

802.11AC20 Middle Channel 6.6GHz-18GHz_VERTICAL

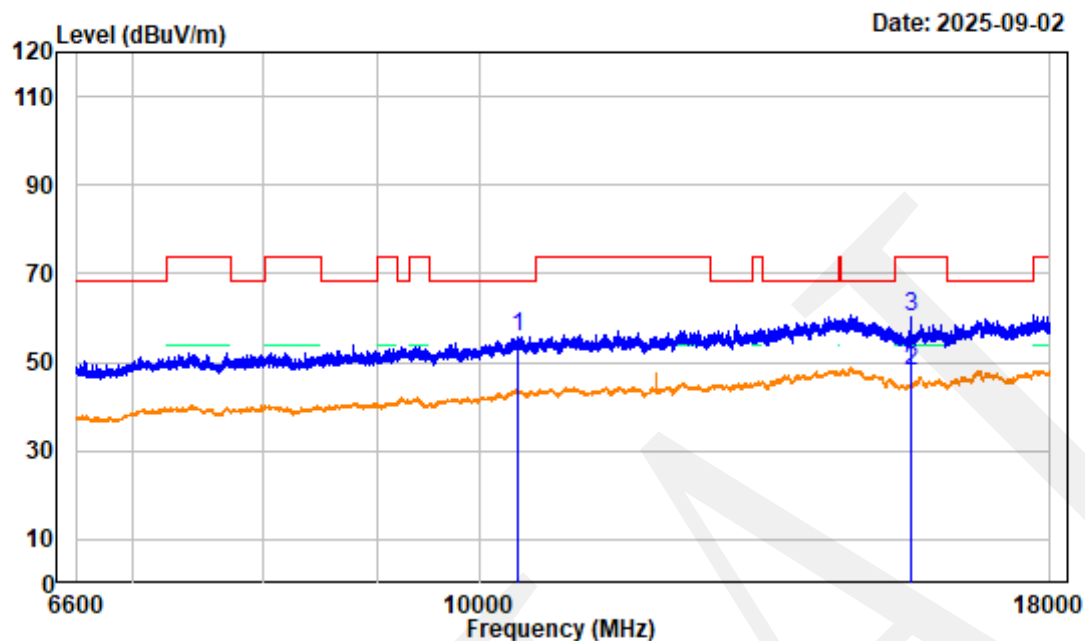

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Middle Channel 5200MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.18	51.30	55.48	68.20	-12.72	peak
2	15600.000	4.69	43.41	48.10	54.00	-5.90	average
3	15600.000	4.69	55.47	60.16	74.00	-13.84	peak


802.11AC20 High Channel 1GHz-6.6GHz_HORIZONTAL

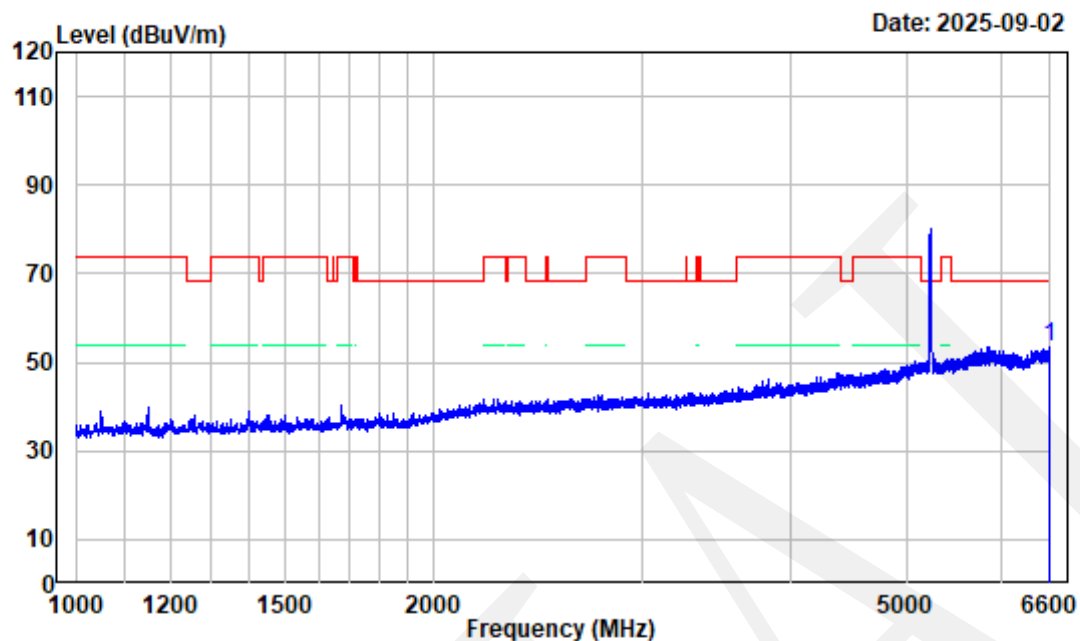

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5240MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6588.100	-3.52	57.04	53.52	68.20	-14.68	Peak


802.11AC20 High Channel 1GHz-6.6GHz_VERTICAL

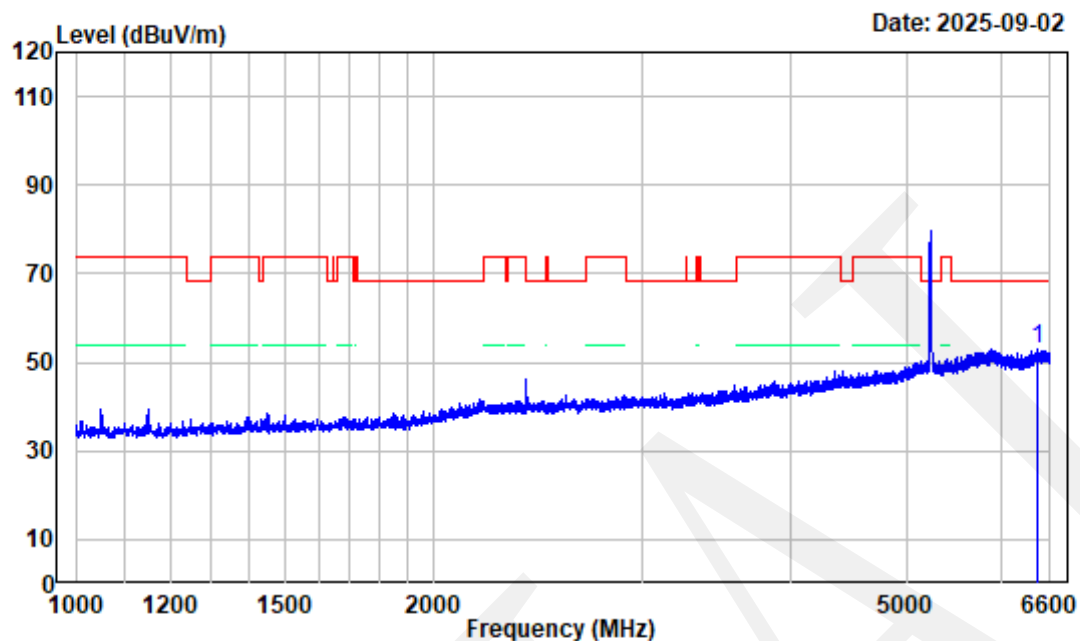

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5240MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6431.300	-3.53	56.66	53.13	68.20	-15.07 Peak

802.11AC20 High Channel 6.6GHz-18GHz_HORIZONTAL

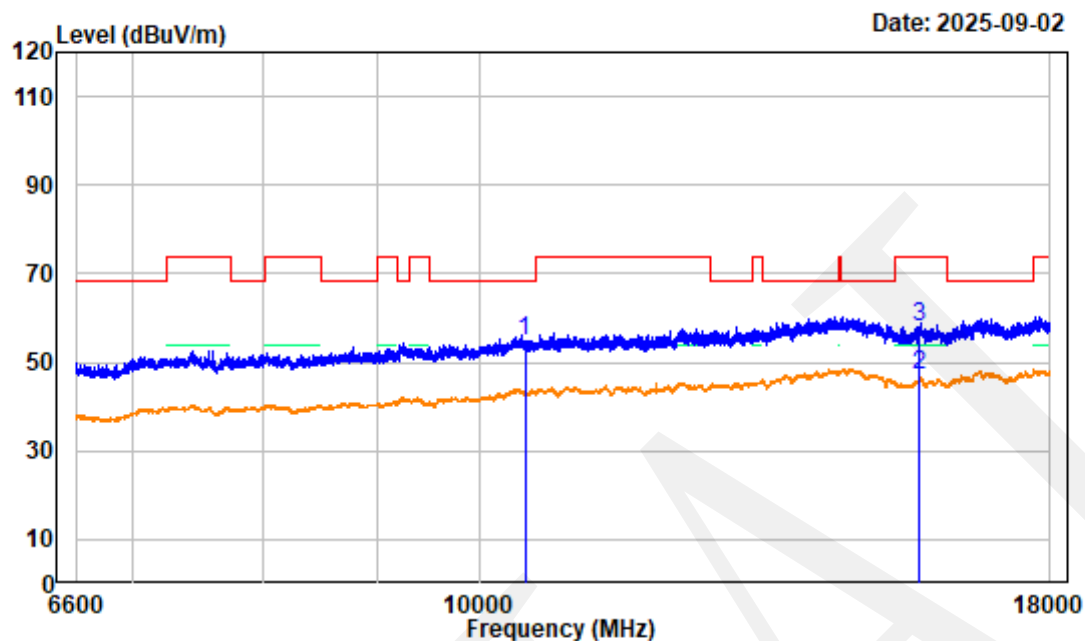


Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504U35143E-RF
 Test Mode : Transmitting
 Note : 802.11AC20 High Channel 5240MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Tester:Kevin Lv

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	4.01	50.66	54.67	68.20	-13.53	peak
2	15720.000	4.85	42.02	46.87	54.00	-7.13	average
3	15720.000	4.85	53.11	57.96	74.00	-16.04	peak

802.11AC20 High Channel 6.6GHz-18GHz_VERTICAL

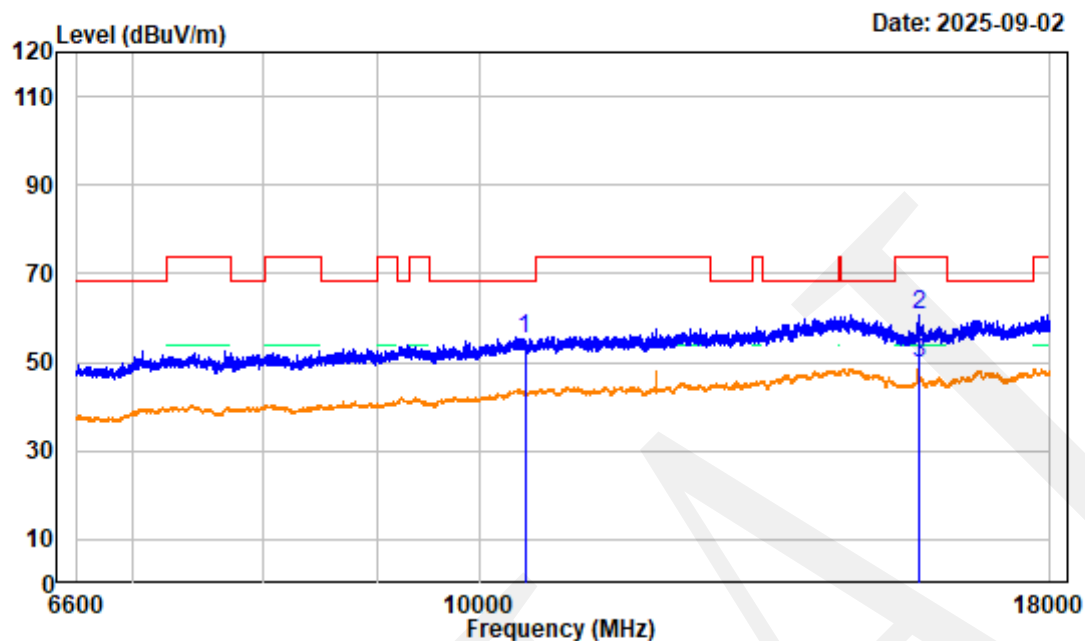

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5240MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	4.01	51.06	55.07	68.20	-13.13	peak
2	15724.280	4.91	55.89	60.80	74.00	-13.20	Peak
3	15724.280	4.91	44.81	49.72	54.00	-4.28	Average

802.11AC20 High Channel Bandedge_HORIZONTAL

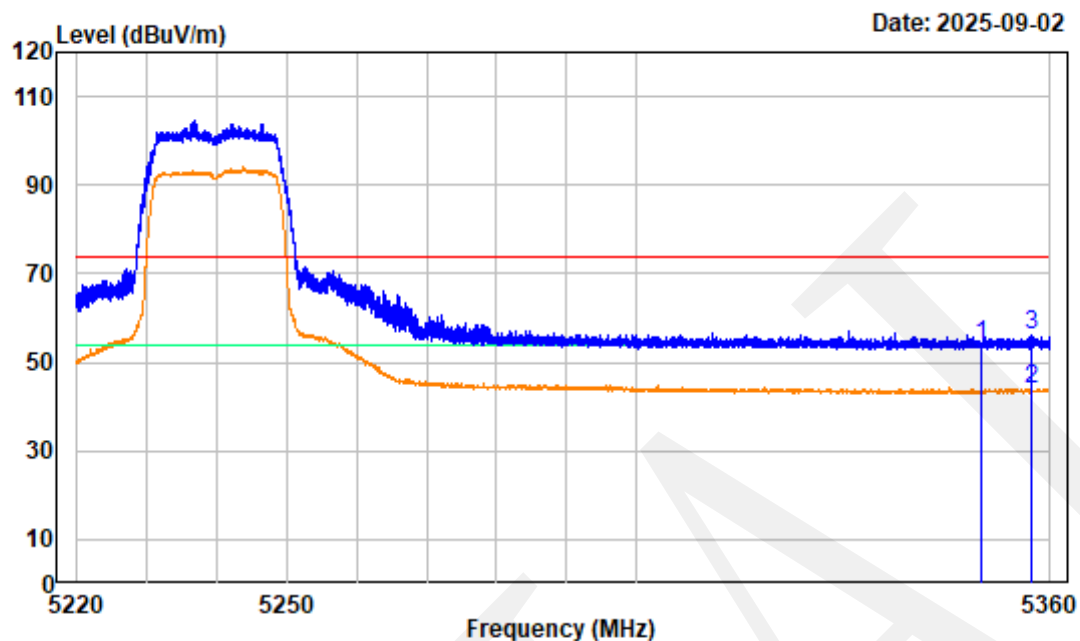

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5240MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	59.66	53.97	74.00	-20.03	peak
2	5357.288	-5.66	49.62	43.96	54.00	-10.04	Average
3	5357.288	-5.66	61.64	55.98	74.00	-18.02	Peak


802.11AC20 High Channel Bandedge_VERTICAL

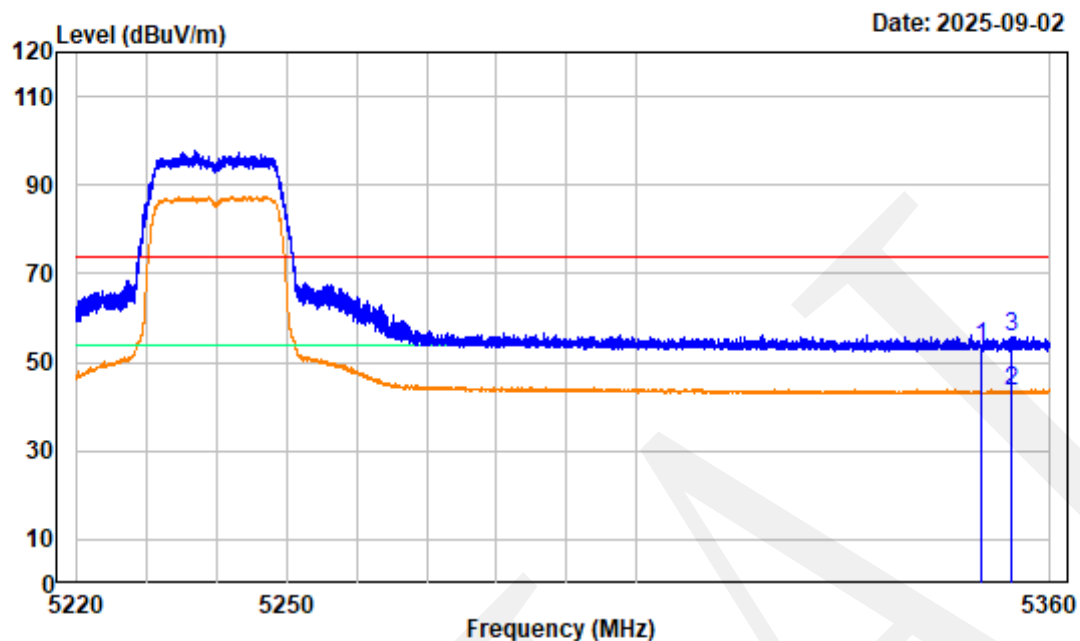

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504U35143E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC20 High Channel 5240MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	59.23	53.54	74.00	-20.46	peak
2	5354.260	-5.66	49.31	43.65	54.00	-10.35	Average
3	5354.260	-5.66	61.36	55.70	74.00	-18.30	Peak

802.11AC40 Low Channel 1GHz-6.6GHz_HORIZONTAL

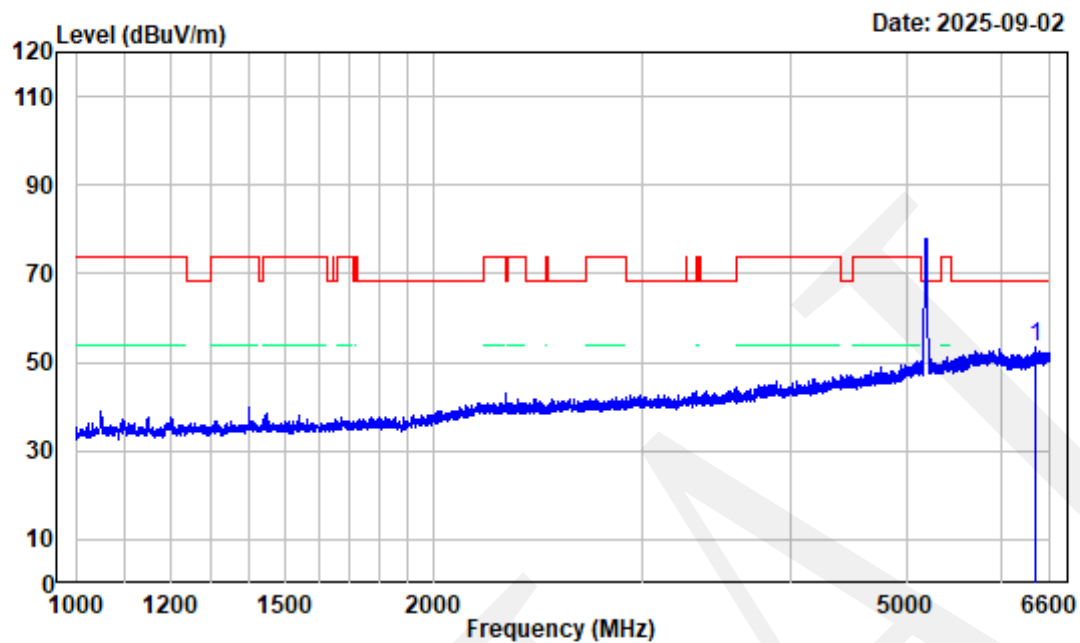

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5190MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6421.500	-3.58	56.83	53.25	68.20	-14.95 Peak


802.11AC40 Low Channel 1GHz-6.6GHz_VERTICAL

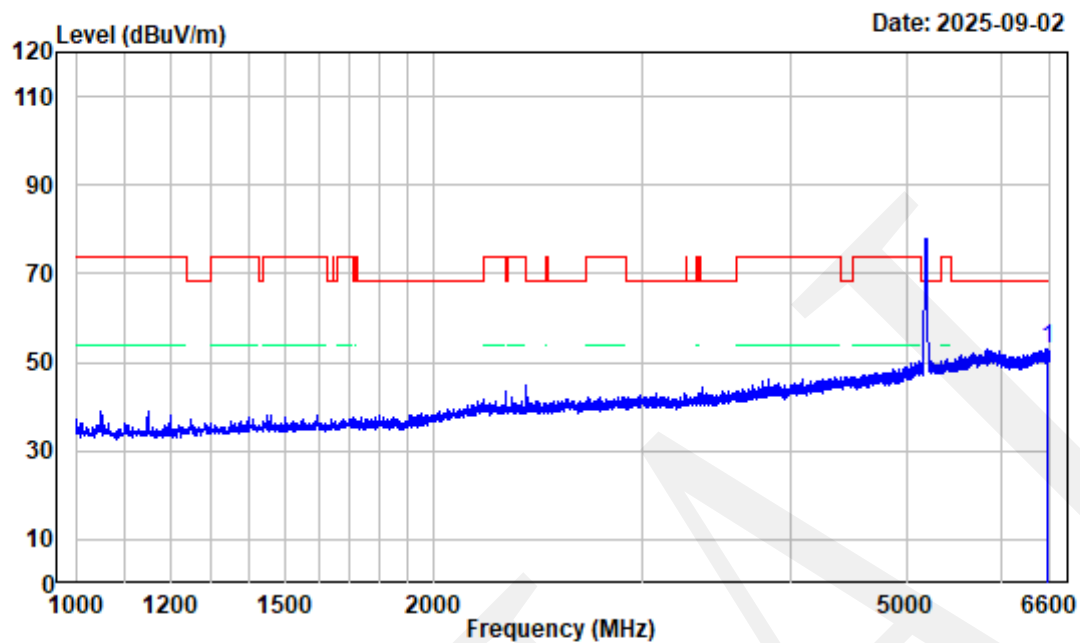

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5190MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6562.200	-3.60	56.75	53.15	68.20	-15.05 Peak

802.11AC40 Low Channel 6.6GHz-18GHz_HORIZONTAL

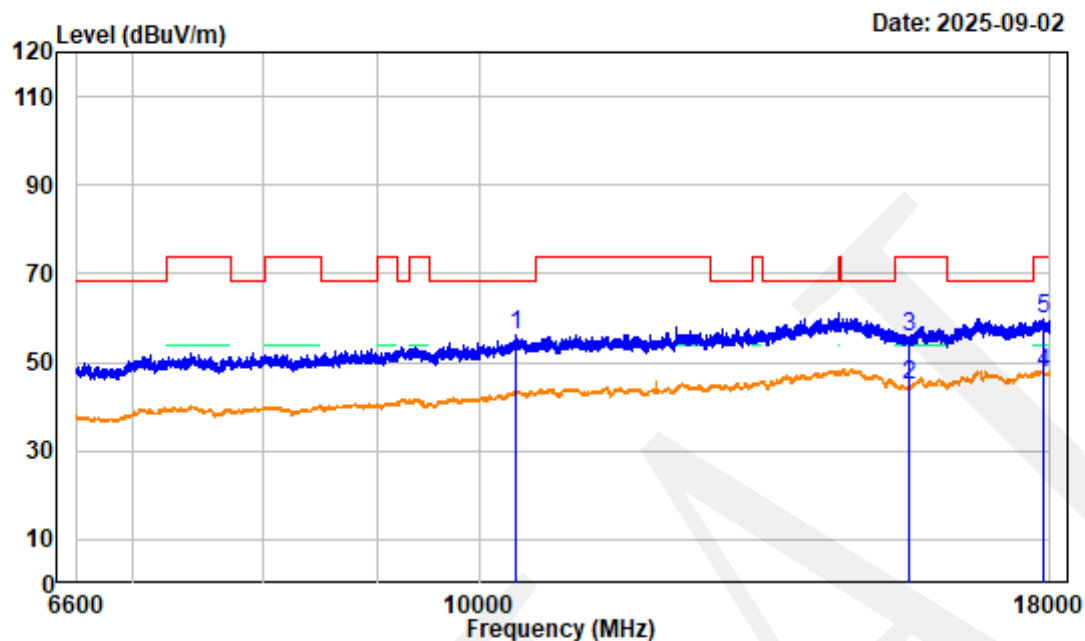

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5190MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10380.000	4.09	52.02	56.11	68.20	-12.09	peak
2	15570.000	4.80	39.91	44.71	54.00	-9.29	average
3	15570.000	4.80	50.97	55.77	74.00	-18.23	peak
4	17870.320	8.29	39.30	47.59	54.00	-6.41	Average
5	17870.320	8.29	51.35	59.64	74.00	-14.36	Peak

802.11AC40 Low Channel 6.6GHz-18GHz_VERTICAL

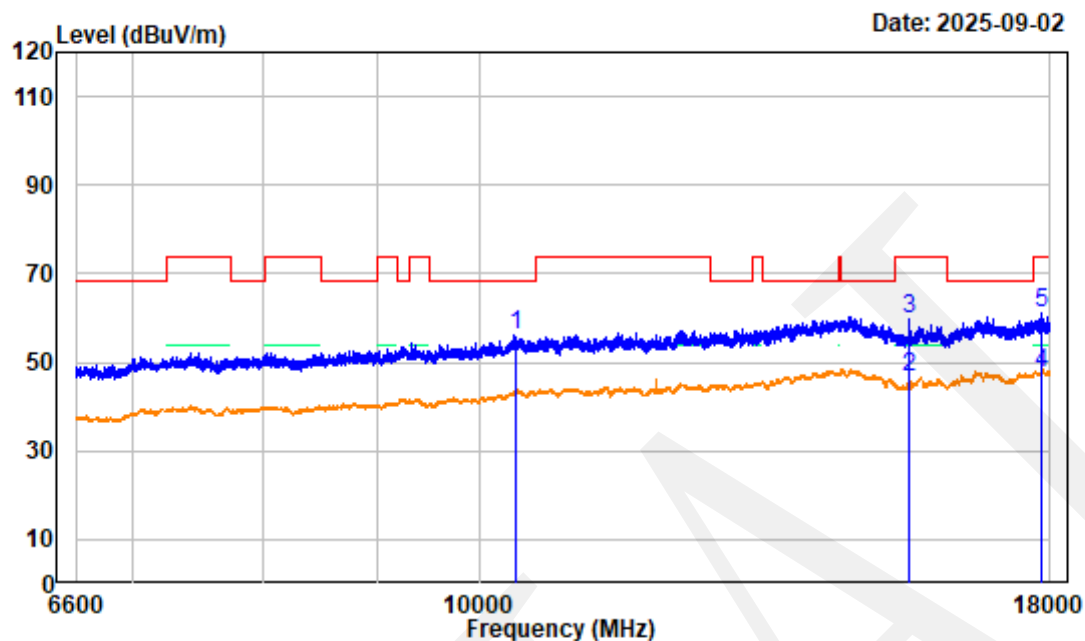

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5190MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10380.000	4.09	52.02	56.11	68.20	-12.09	peak
2	15570.000	4.80	41.99	46.79	54.00	-7.21	average
3	15570.000	4.80	54.93	59.73	74.00	-14.27	peak
4	17856.070	8.31	39.24	47.55	54.00	-6.45	Average
5	17856.070	8.31	52.62	60.93	74.00	-13.07	Peak

802.11AC40 Low Channel Bandedge_HORIZONTAL

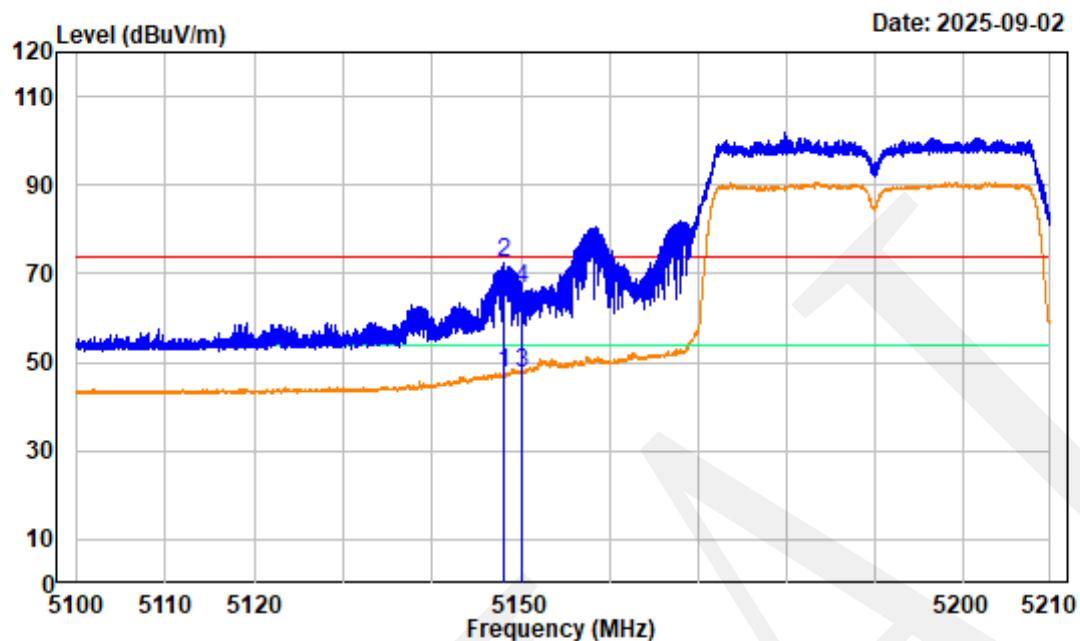

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5190MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.111	-6.04	53.81	47.77	54.00	-6.23	Average
2	5148.111	-6.04	78.42	72.38	74.00	-1.62	Peak
3	5150.000	-6.04	53.80	47.76	54.00	-6.24	average
4	5150.000	-6.04	72.65	66.61	74.00	-7.39	peak

802.11AC40 Low Channel Bandedge_VERTICAL

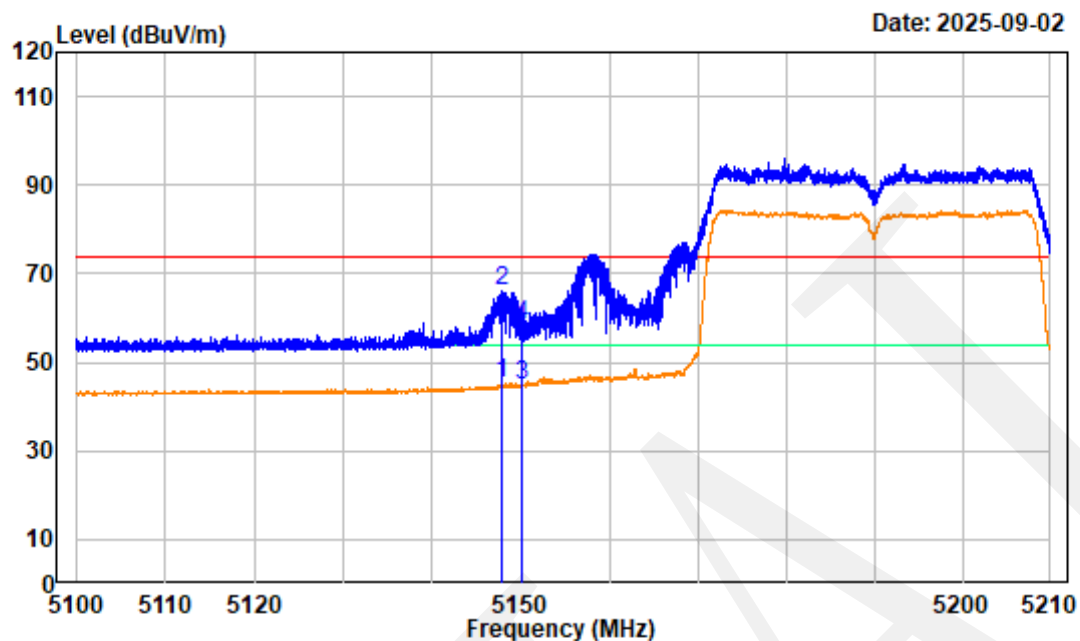

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5190MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.822	-6.04	51.21	45.17	54.00	-8.83	Average
2	5147.822	-6.04	72.24	66.20	74.00	-7.80	Peak
3	5150.000	-6.04	51.09	45.05	54.00	-8.95	average
4	5150.000	-6.04	64.25	58.21	74.00	-15.79	peak


802.11AC40 High Channel 1GHz-6.6GHz_HORIZONTAL

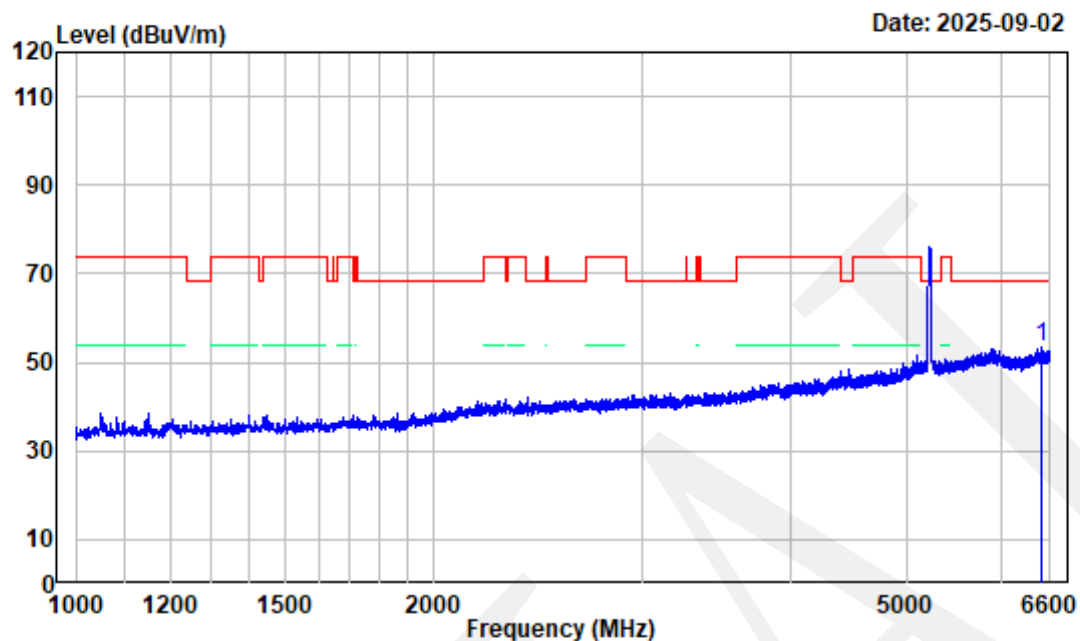

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5230MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6501.300	-3.85	57.39	53.54	68.20	-14.66 Peak


802.11AC40 High Channel 1GHz-6.6GHz_VERTICAL

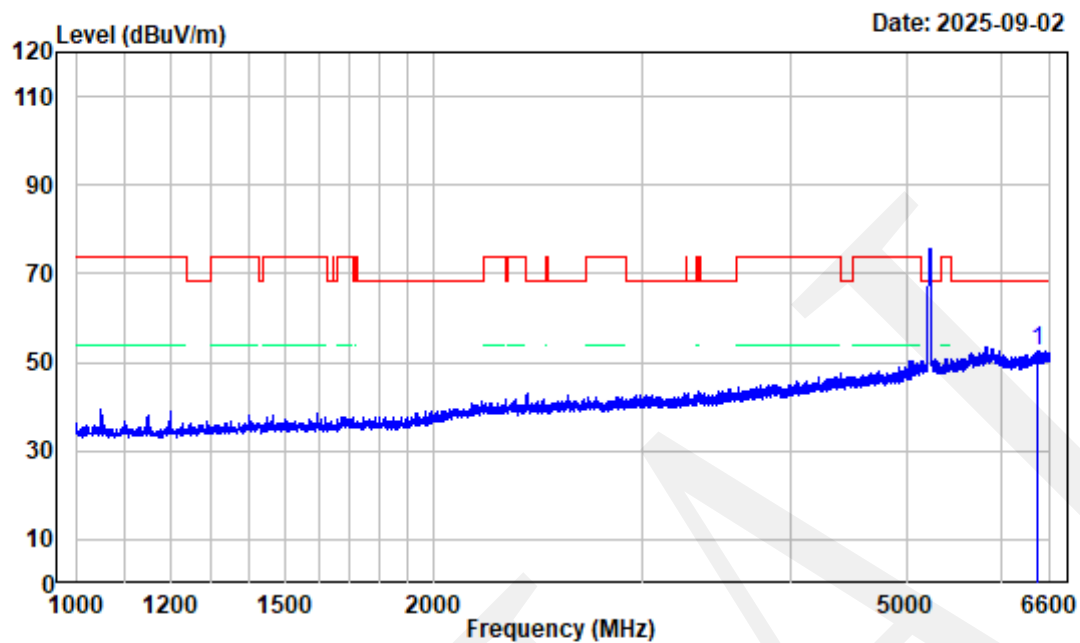

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5230MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6448.800	-3.45	56.09	52.64	68.20	-15.56 Peak

802.11AC40 High Channel 6.6GHz-18GHz_HORIZONTAL

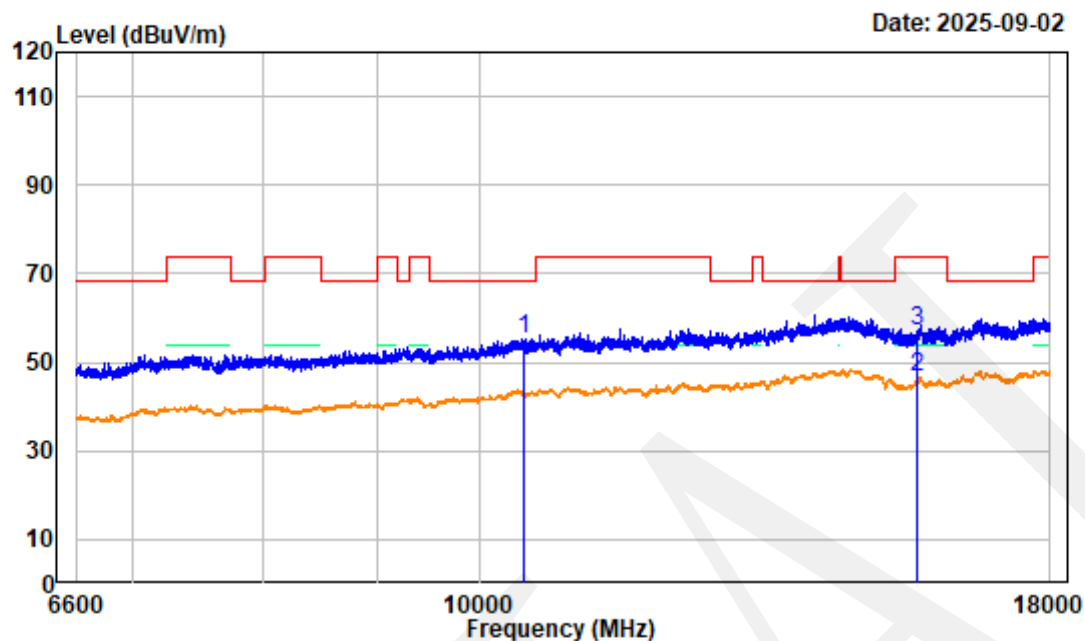

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5230MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	4.20	50.96	55.16	68.20	-13.04	peak
2	15690.000	4.62	42.21	46.83	54.00	-7.17	average
3	15690.000	4.62	52.27	56.89	74.00	-17.11	peak

802.11AC40 High Channel 6.6GHz-18GHz_VERTICAL

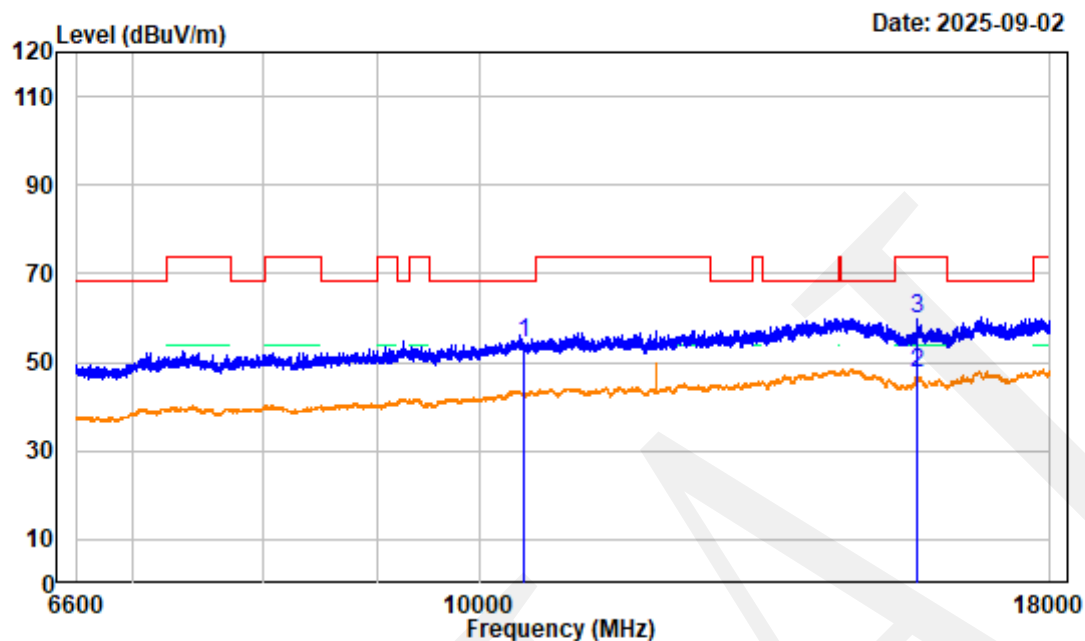

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5230MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	4.20	50.35	54.55	68.20	-13.65	peak
2	15690.000	4.62	42.78	47.40	54.00	-6.60	average
3	15690.000	4.62	55.34	59.96	74.00	-14.04	peak

802.11AC40 High Channel Bandedge_HORIZONTAL

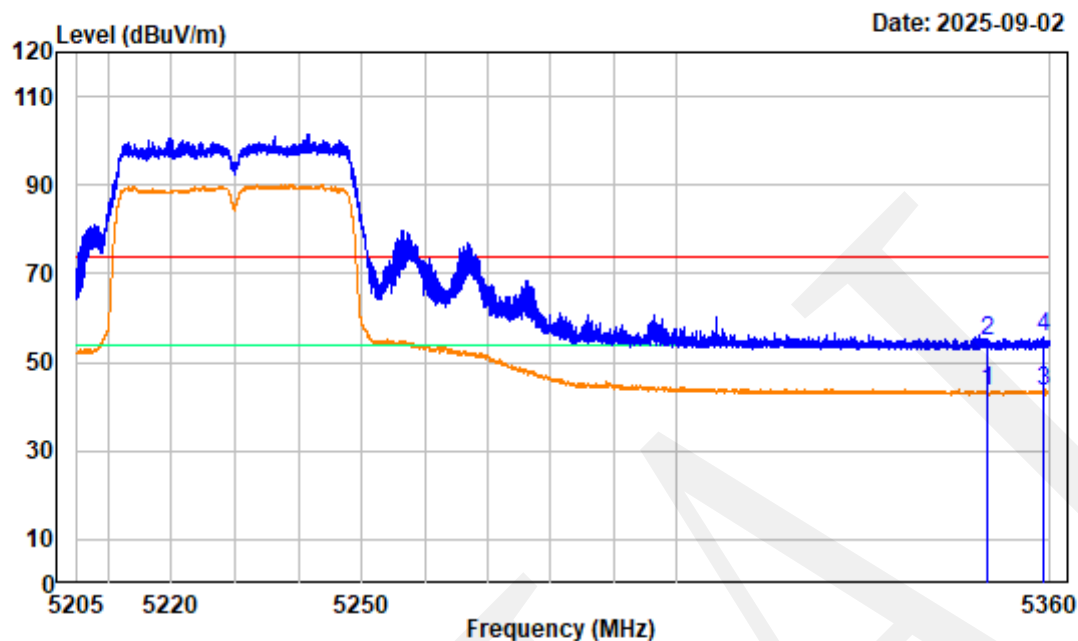

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5230MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	49.21	43.52	54.00	-10.48	average
2	5350.000	-5.69	60.27	54.58	74.00	-19.42	peak
3	5358.935	-5.64	49.19	43.55	54.00	-10.45	Average
4	5358.935	-5.64	61.15	55.51	74.00	-18.49	Peak

802.11AC40 High Channel Bandedge_VERTICAL

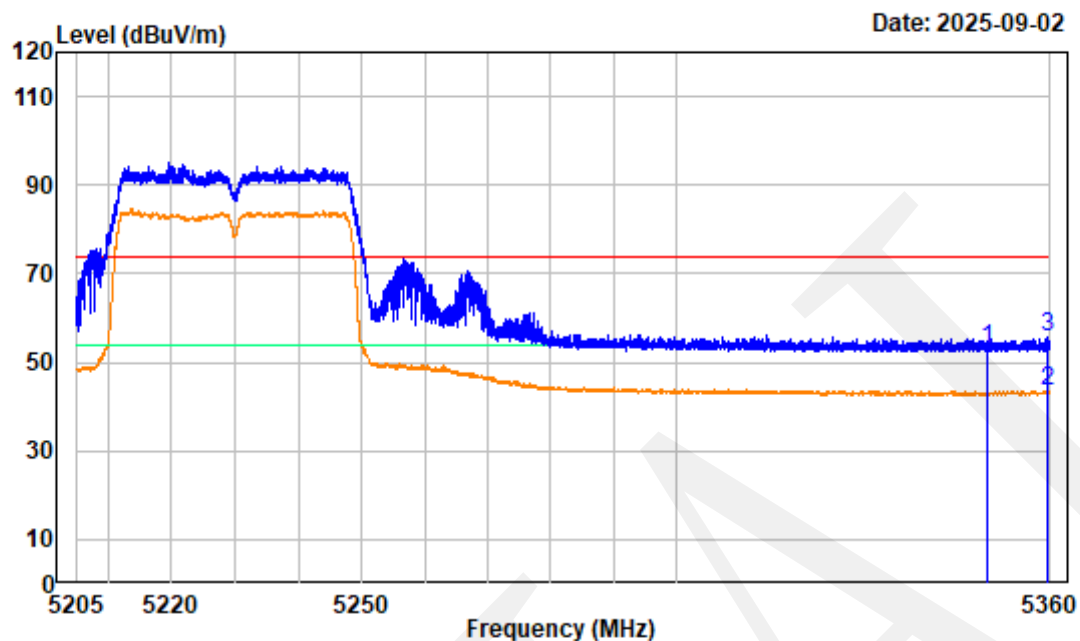

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5230MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	58.52	52.83	74.00	-21.17	peak
2	5359.729	-5.64	49.20	43.56	54.00	-10.44	Average
3	5359.729	-5.64	61.22	55.58	74.00	-18.42	Peak

802.11AC80 Channel 1GHz-6.6GHz_HORIZONTAL

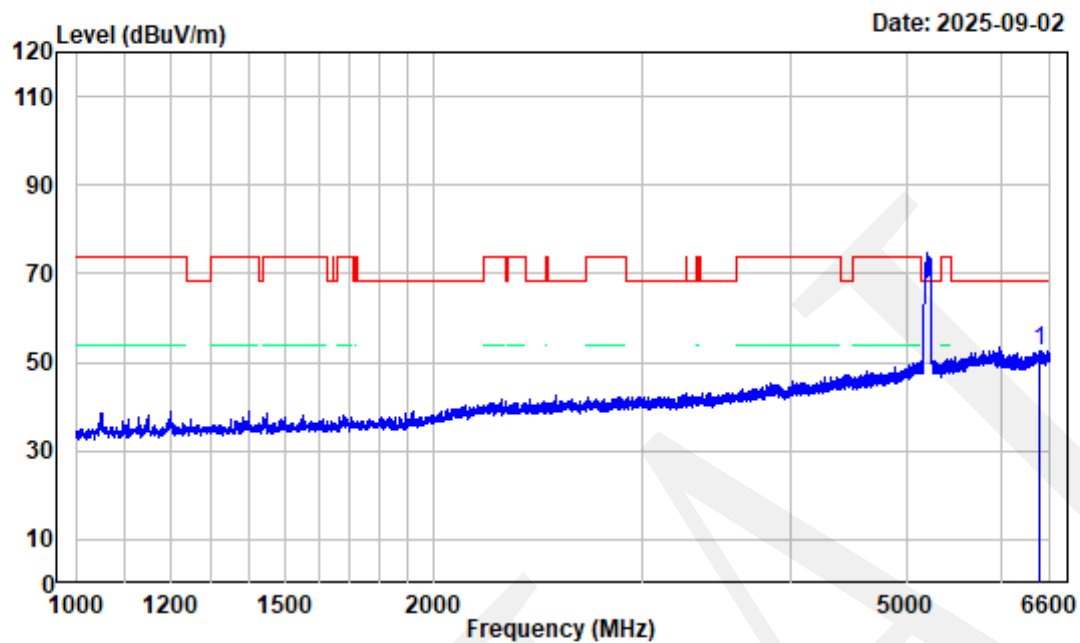

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC80 Channel 5210MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6463.500	-3.56	56.01	52.45	68.20	-15.75 Peak

802.11AC80 Channel 1GHz-6.6GHz_VERTICAL

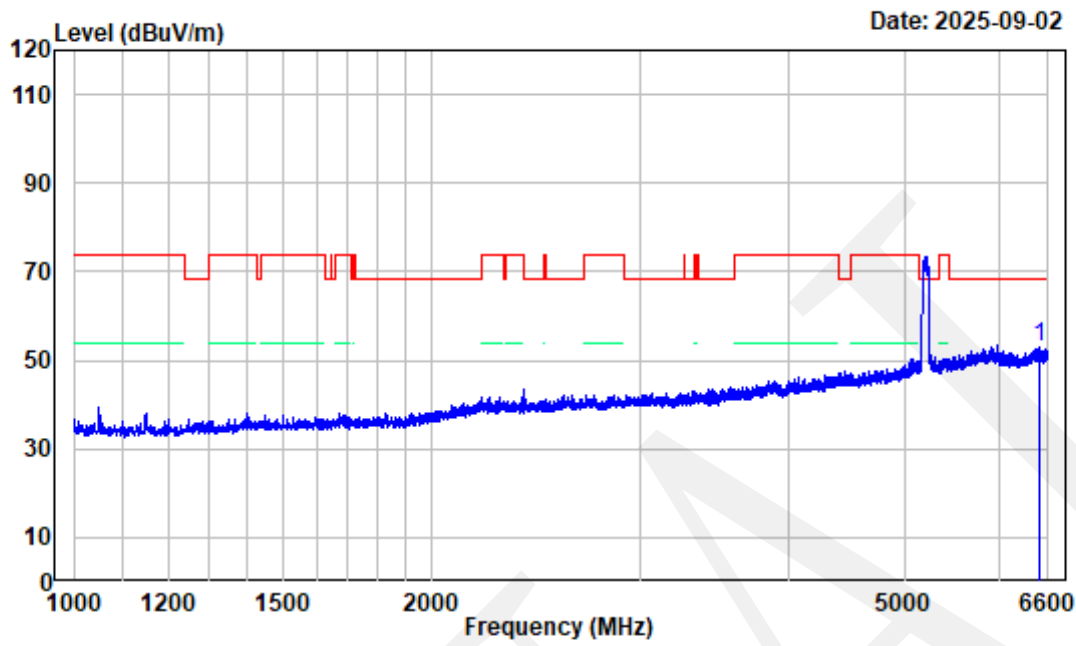

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC80 Channel 5210MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6499.900	-3.85	56.86	53.01	68.20	-15.19 Peak

802.11AC80 Channel 6.6GHz-18GHz_HORIZONTAL

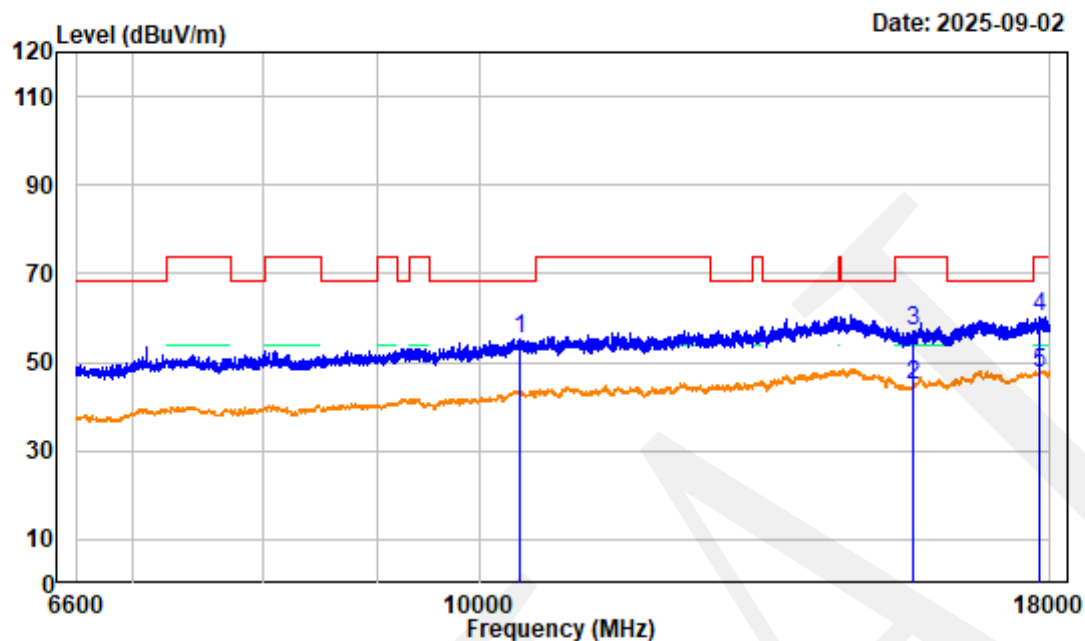

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC80 Channel 5210MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10420.000	4.22	50.88	55.10	68.20	-13.10	peak
2	15630.000	4.68	40.22	44.90	54.00	-9.10	average
3	15630.000	4.68	52.20	56.88	74.00	-17.12	peak
4	17821.880	7.92	52.53	60.45	74.00	-13.55	Peak
5	17821.880	7.92	39.59	47.51	54.00	-6.49	Average

802.11AC80 Channel 6.6GHz-18GHz_VERTICAL

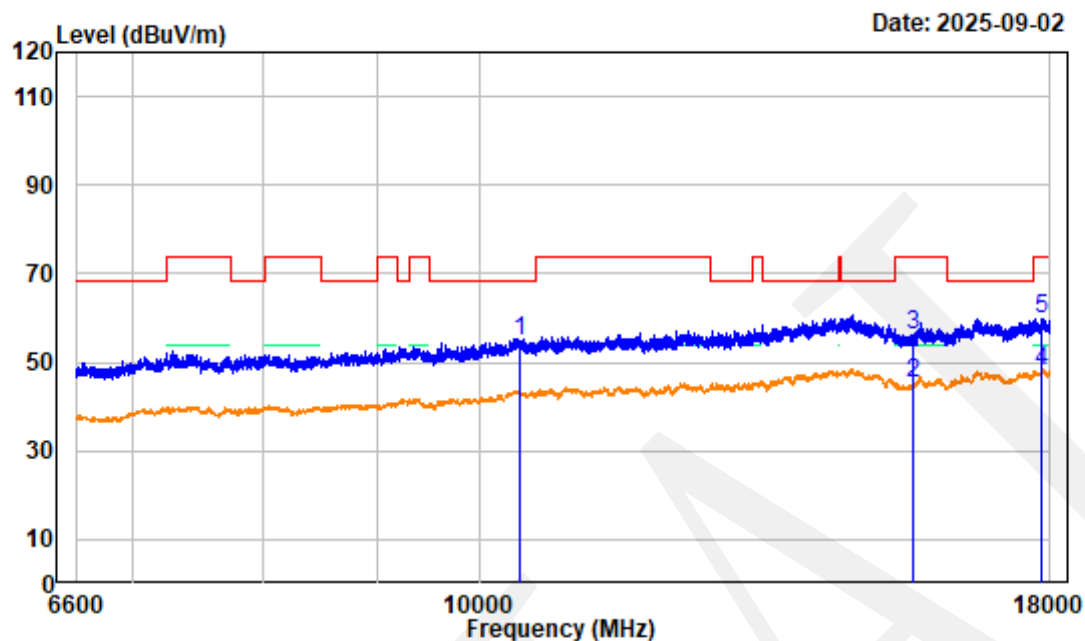

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC80 Channel 5210MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10420.000	4.22	50.48	54.70	68.20	-13.50	peak
2	15630.000	4.68	40.38	45.06	54.00	-8.94	average
3	15630.000	4.68	51.35	56.03	74.00	-17.97	peak
4	17826.150	7.97	39.84	47.81	54.00	-6.19	Average
5	17826.150	7.97	52.03	60.00	74.00	-14.00	Peak

802.11AC80 Channel Bandedge_HORIZONTAL

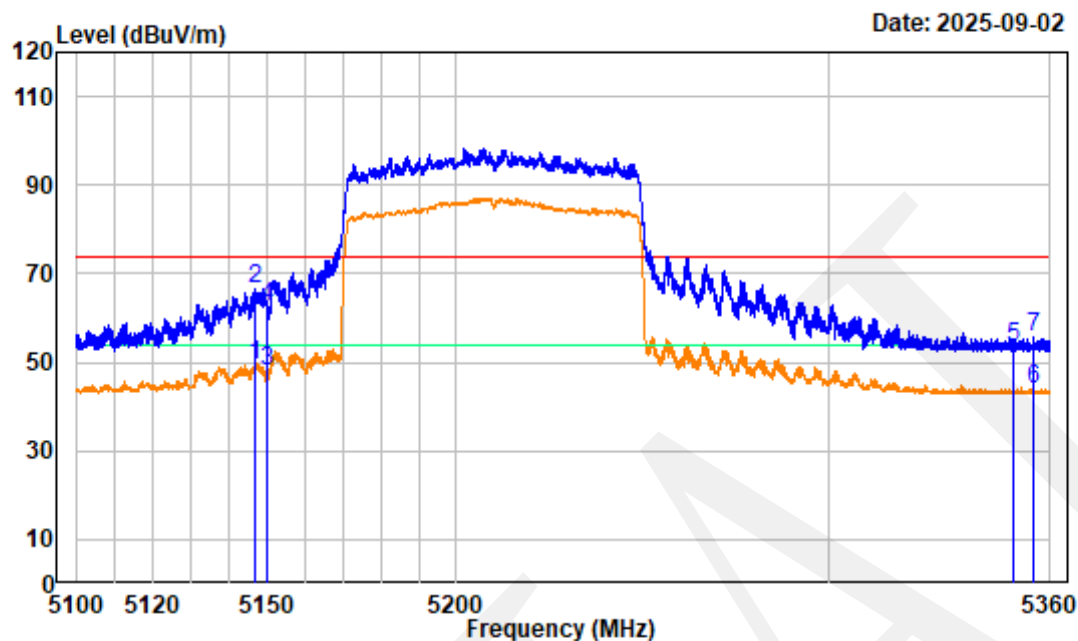

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC80 Channel 5210MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5146.800	-6.03	55.55	49.52	54.00	-4.48	Average
2	5146.800	-6.03	72.59	66.56	74.00	-7.44	Peak
3	5150.000	-6.04	54.11	48.07	54.00	-5.93	average
4	5150.000	-6.04	68.45	62.41	74.00	-11.59	peak
5	5350.000	-5.69	59.04	53.35	74.00	-20.65	peak
6	5355.223	-5.66	49.39	43.73	54.00	-10.27	Average
7	5355.223	-5.66	61.36	55.70	74.00	-18.30	Peak

802.11AC80 Channel Bandedge_VERTICAL

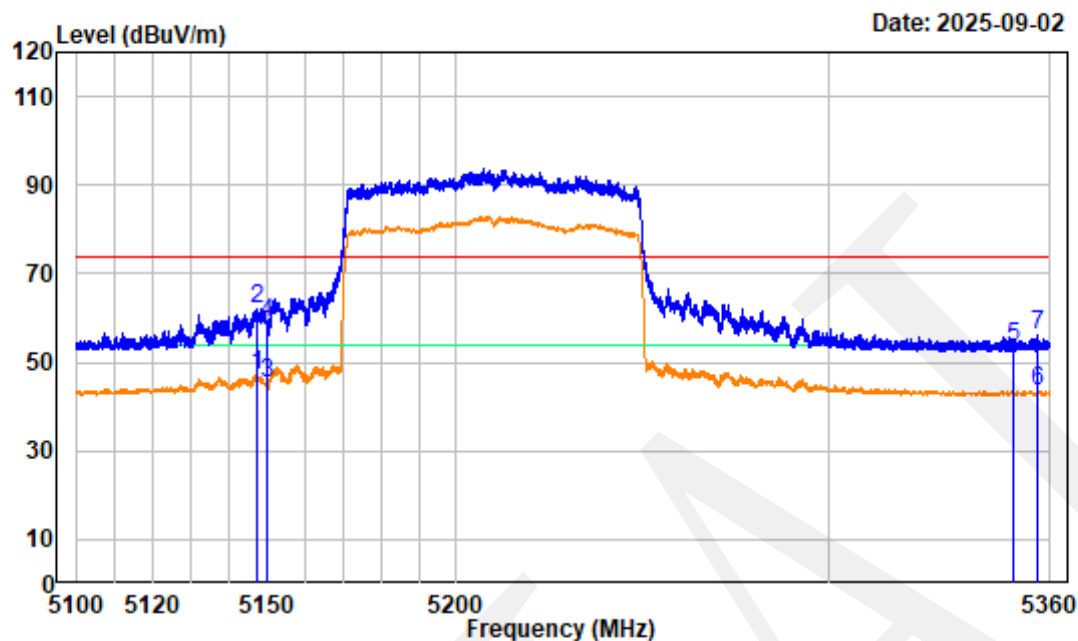

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC80 Channel 5210MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.580	-6.04	53.18	47.14	54.00	-6.86	Average
2	5147.580	-6.04	68.17	62.13	74.00	-11.87	Peak
3	5150.000	-6.04	51.11	45.07	54.00	-8.93	Average
4	5150.000	-6.04	64.83	58.79	74.00	-15.21	peak
5	5350.000	-5.69	59.34	53.65	74.00	-20.35	peak
6	5356.490	-5.66	49.15	43.49	54.00	-10.51	Average
7	5356.490	-5.66	61.62	55.96	74.00	-18.04	Peak


802.11AX20 Low Channel 1GHz-6.6GHz_HORIZONTAL

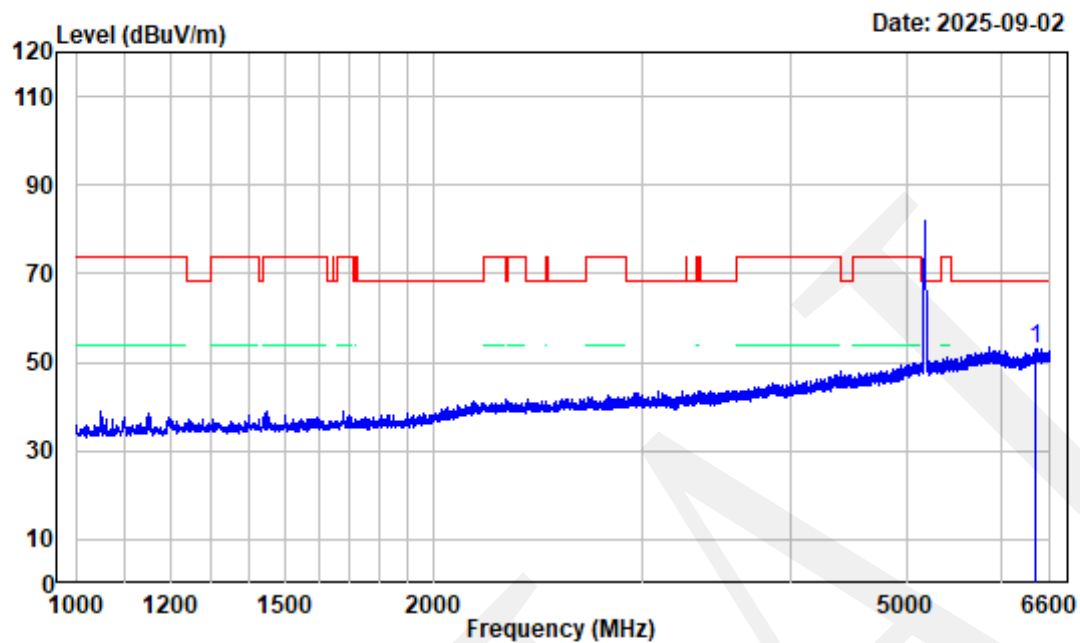

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5180MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6417.300	-3.59	56.38	52.79	68.20	-15.41	Peak

802.11AX20 Low Channel 1GHz-6.6GHz_VERTICAL

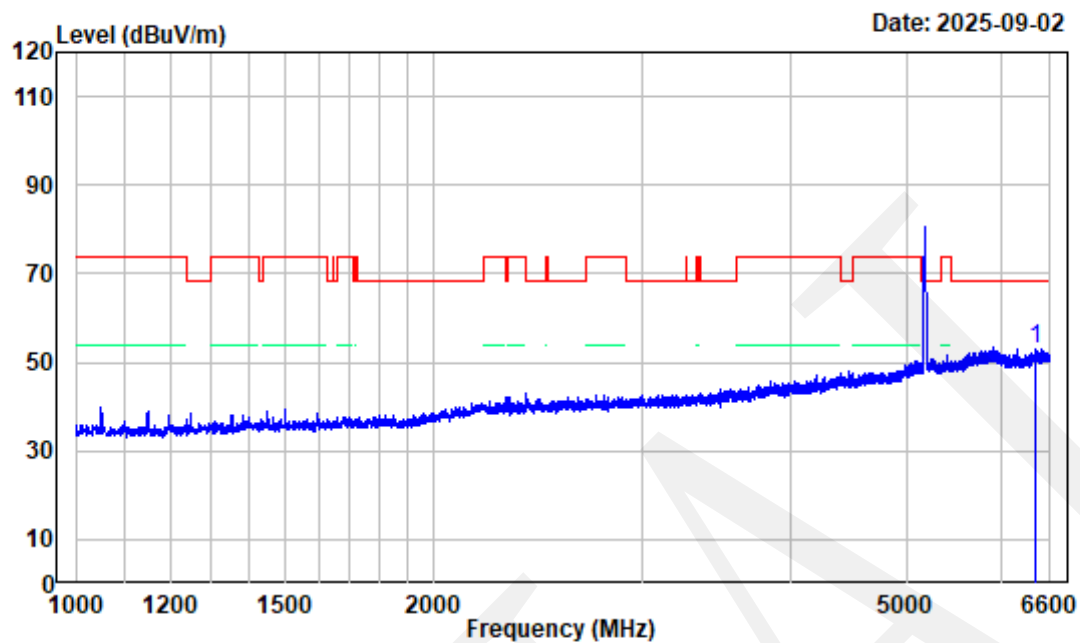

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5180MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6406.100	-3.64	56.65	53.01	68.20	-15.19 Peak

802.11AX20 Low Channel 6.6GHz-18GHz_HORIZONTAL

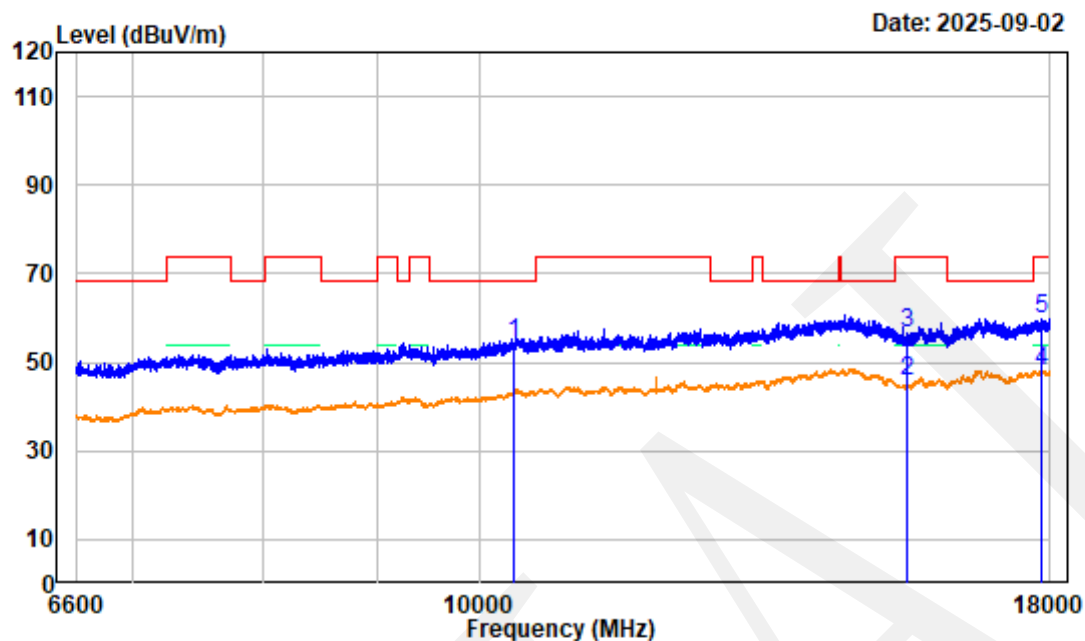

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5180MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.99	50.55	54.54	68.20	-13.66	peak
2	15540.000	4.85	40.69	45.54	54.00	-8.46	average
3	15540.000	4.85	51.62	56.47	74.00	-17.53	peak
4	17846.100	8.26	39.58	47.84	54.00	-6.16	Average
5	17846.100	8.26	51.51	59.77	74.00	-14.23	Peak

802.11AX20 Low Channel 6.6GHz-18GHz_VERTICAL

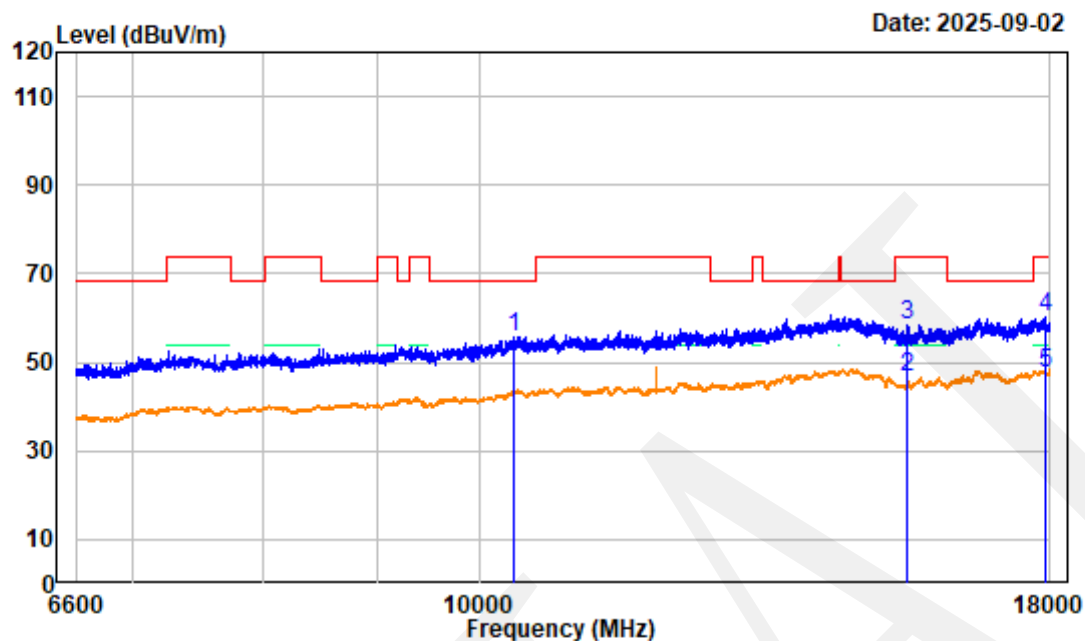

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5180MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.99	51.88	55.87	68.20	-12.33	peak
2	15540.000	4.85	41.59	46.44	54.00	-7.56	average
3	15540.000	4.85	53.52	58.37	74.00	-15.63	peak
4	17901.680	8.25	51.81	60.06	74.00	-13.94	Peak
5	17901.680	8.25	39.49	47.74	54.00	-6.26	Average

802.11AX20 Low Channel Bandedge_HORIZONTAL

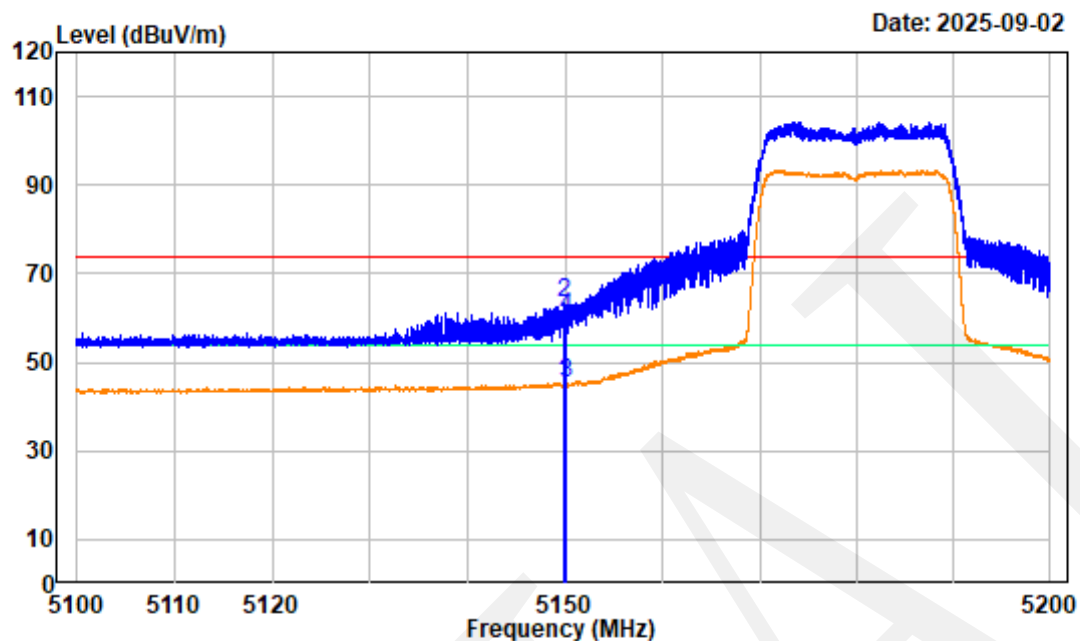

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5180MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.775	-6.04	51.39	45.35	54.00	-8.65	Average
2	5149.775	-6.04	69.36	63.32	74.00	-10.68	Peak
3	5150.000	-6.04	51.31	45.27	54.00	-8.73	average
4	5150.000	-6.04	66.36	60.32	74.00	-13.68	peak

802.11AX20 Low Channel Bandedge_VERTICAL

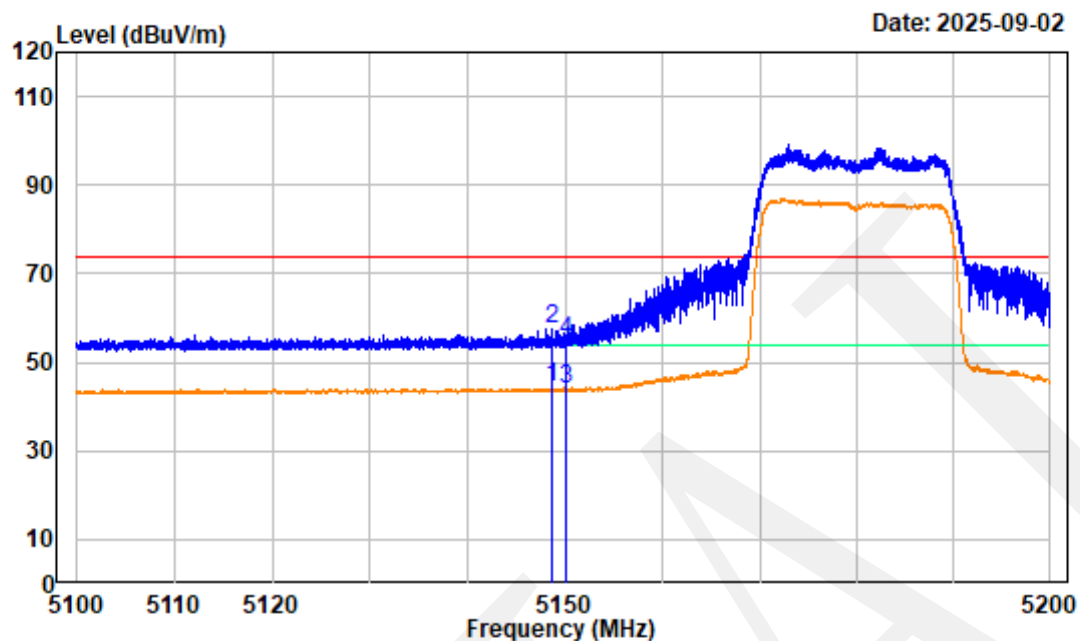

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5180MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.612	-6.04	50.55	44.51	54.00	-9.49	Average
2	5148.612	-6.04	63.58	57.54	74.00	-16.46	Peak
3	5150.000	-6.04	50.12	44.08	54.00	-9.92	Average
4	5150.000	-6.04	61.01	54.97	74.00	-19.03	peak


802.11AX20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

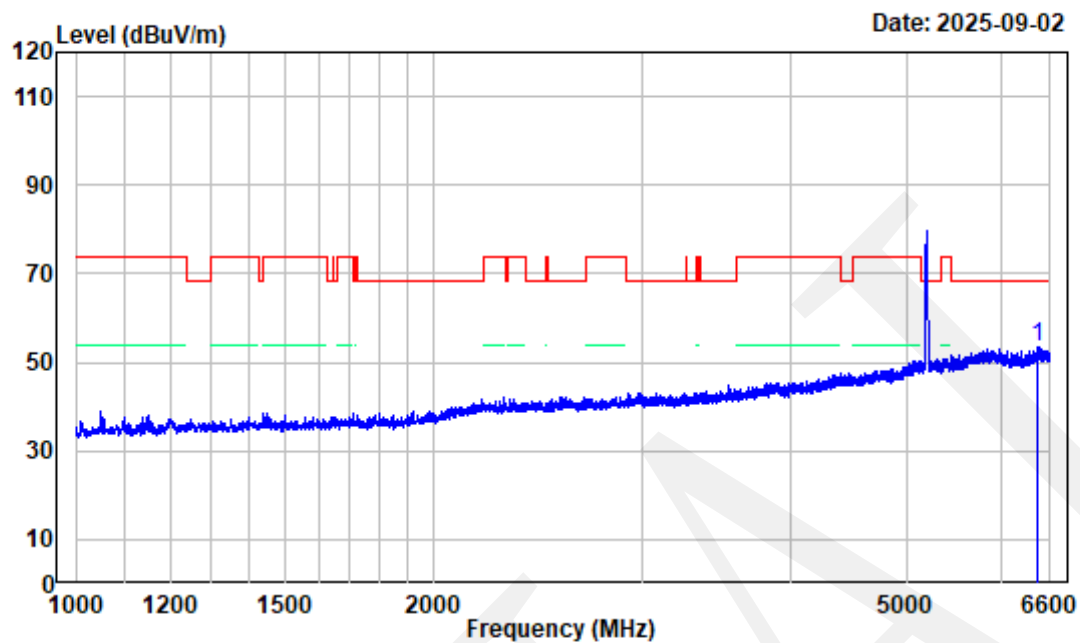

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting
Note : 802.11AX20 Middle Channel 5200MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz
Tester:Kevin Lv

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6450.900	-3.45	56.84	53.39	68.20	-14.81 Peak

802.11AX20 Middle Channel 1GHz-6.6GHz_VERTICAL

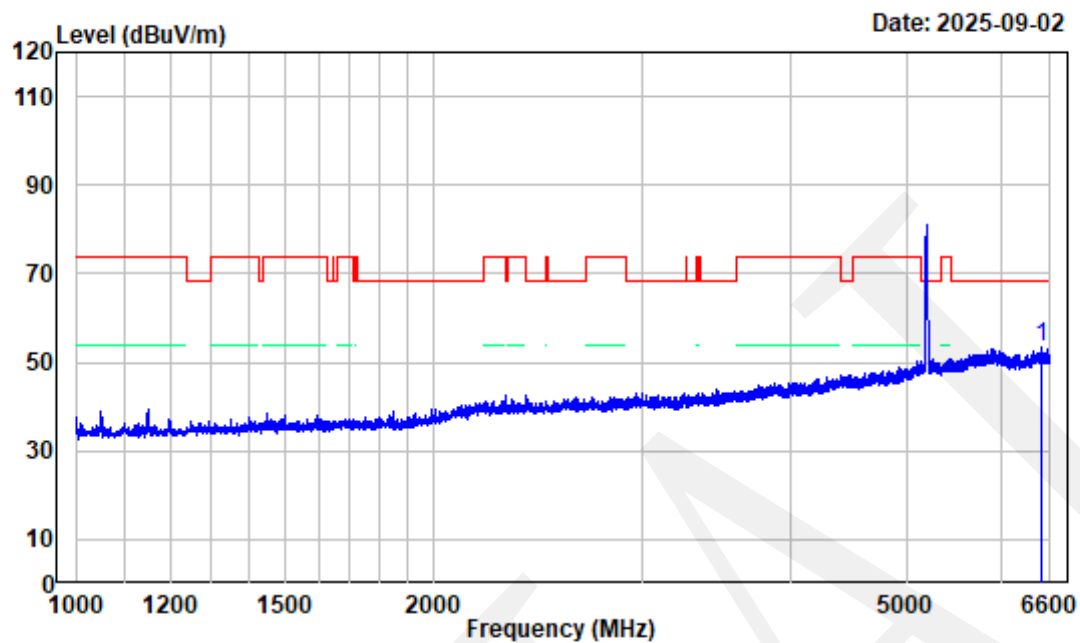

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Middle Channel 5200MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6492.900	-3.79	57.03	53.24	68.20	-14.96 Peak


802.11AX20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

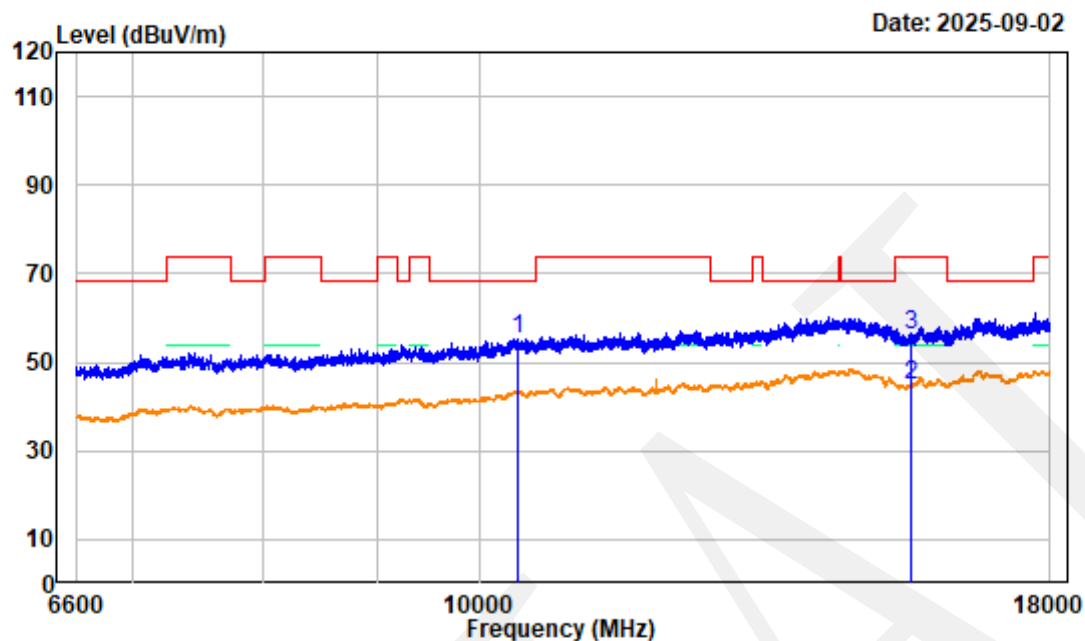

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Middle Channel 5200MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.18	50.88	55.06	68.20	-13.14 peak
2	15600.000	4.69	40.32	45.01	54.00	-8.99 average
3	15600.000	4.69	51.39	56.08	74.00	-17.92 peak

802.11AX20 Middle Channel 6.6GHz-18GHz_VERTICAL

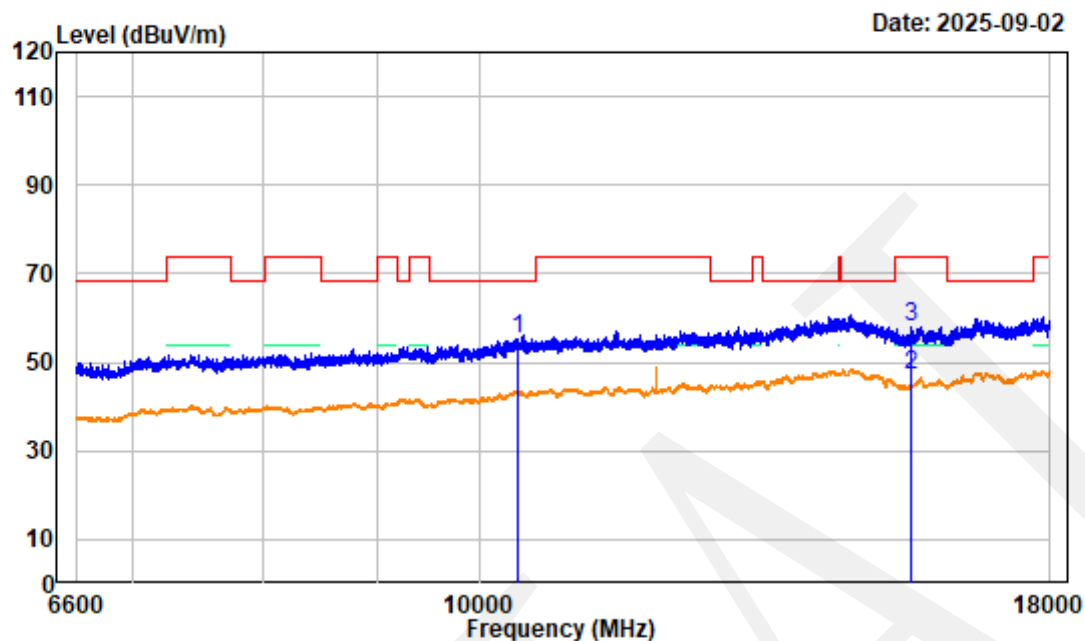

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Middle Channel 5200MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10400.000	4.18	51.13	55.31	68.20	-12.89	peak
2 15600.000	4.69	42.18	46.87	54.00	-7.13	average
3 15600.000	4.69	53.14	57.83	74.00	-16.17	peak


802.11AX20 High Channel 1GHz-6.6GHz_HORIZONTAL

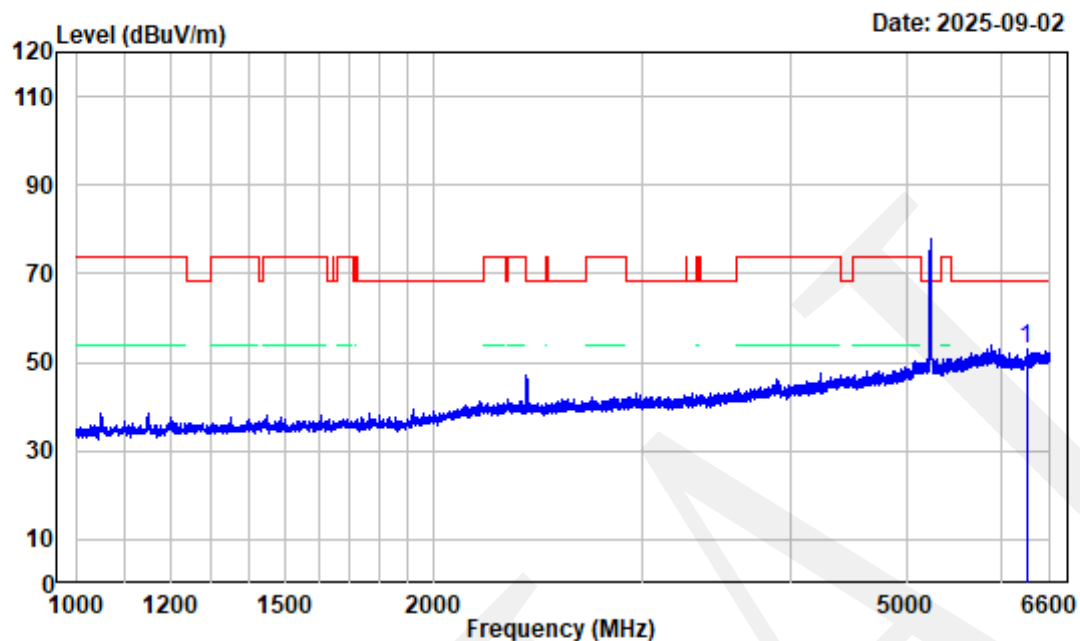

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5240MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6305.300	-4.31	57.29	52.98	68.20	-15.22 Peak


802.11AX20 High Channel 1GHz-6.6GHz_VERTICAL

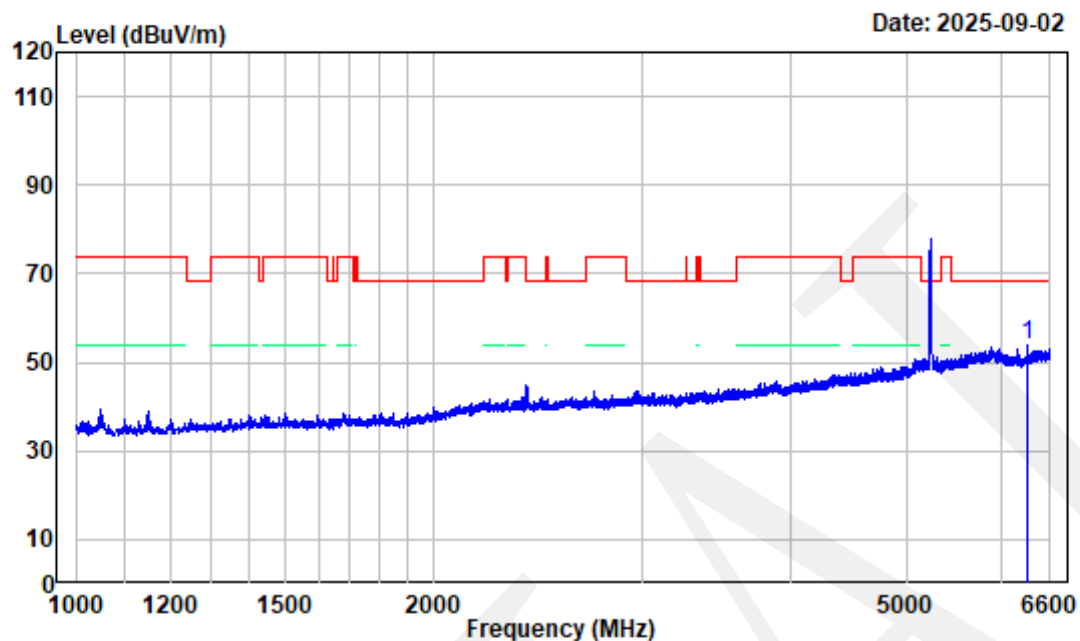

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5240MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6317.900	-4.36	58.23	53.87	68.20	-14.33 Peak

802.11AX20 High Channel 6.6GHz-18GHz_HORIZONTAL

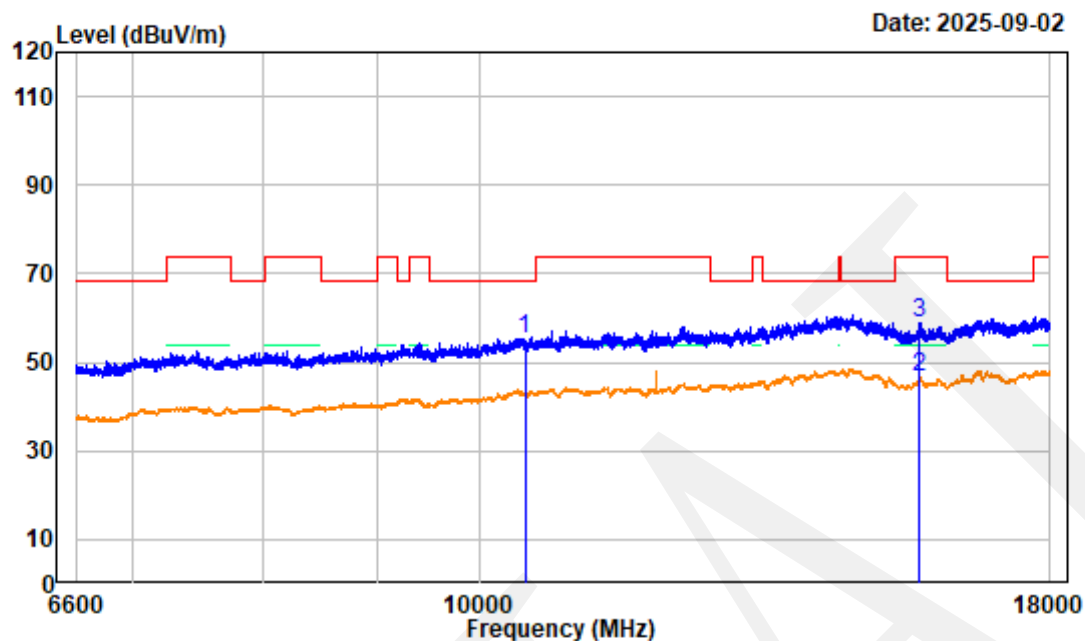

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5240MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	4.01	51.20	55.21	68.20	-12.99	peak
2	15720.000	4.85	41.83	46.68	54.00	-7.32	average
3	15720.000	4.85	53.81	58.66	74.00	-15.34	peak

802.11AX20 High Channel 6.6GHz-18GHz_VERTICAL

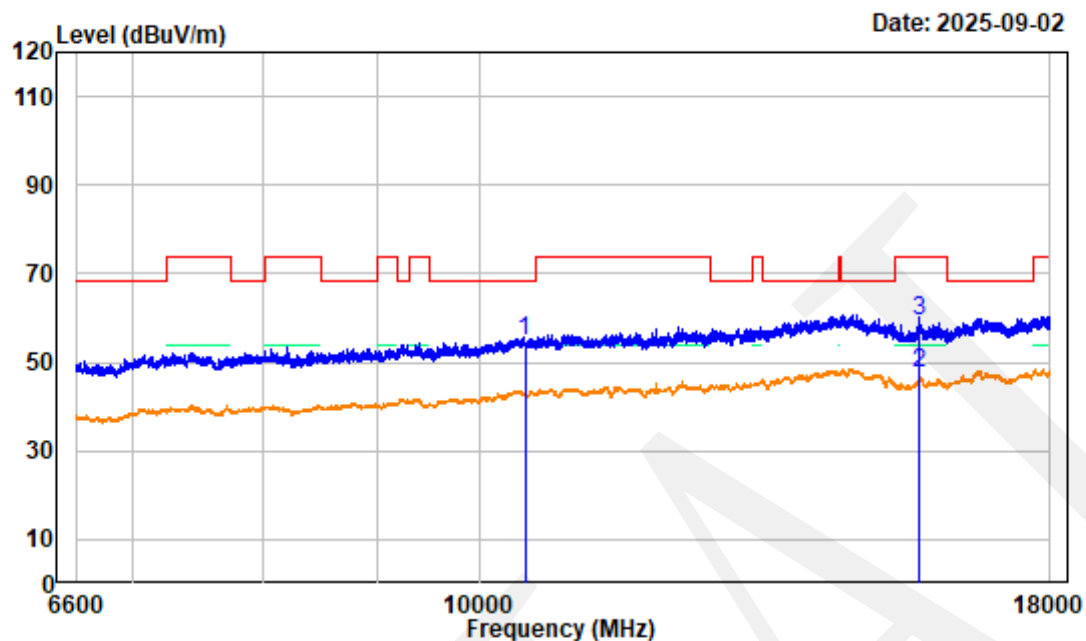

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5240MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	4.01	50.66	54.67	68.20	-13.53	peak
2	15720.000	4.85	42.59	47.44	54.00	-6.56	average
3	15720.000	4.85	54.52	59.37	74.00	-14.63	peak


802.11AX20 High Channel Bandedge_HORIZONTAL

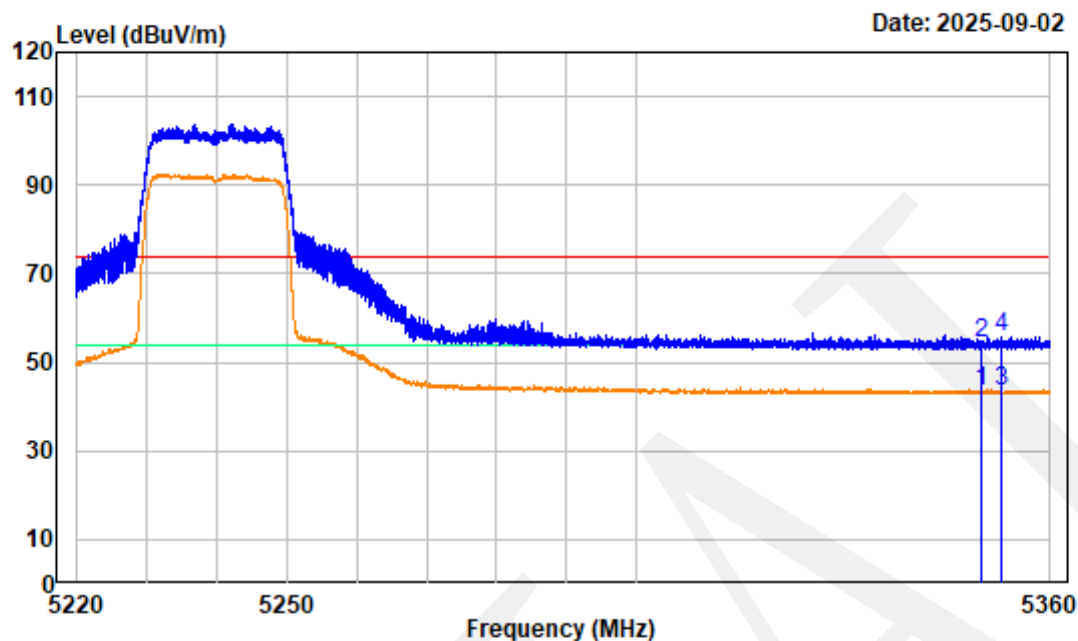

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504U35143E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX20 High Channel 5240MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	49.12	43.43	54.00	-10.57	average
2	5350.000	-5.69	60.00	54.31	74.00	-19.69	peak
3	5352.842	-5.67	49.24	43.57	54.00	-10.43	Average
4	5352.842	-5.67	61.50	55.83	74.00	-18.17	Peak


802.11AX20 High Channel Bandedge_VERTICAL

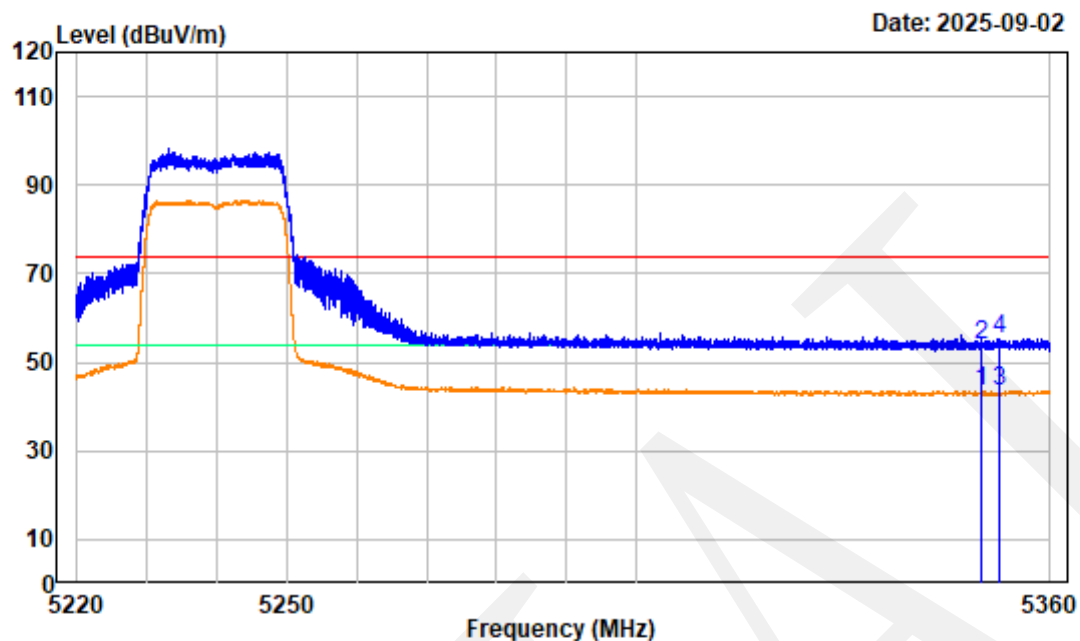

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504U35143E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX20 High Channel 5240MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	48.99	43.30	54.00	-10.70	average
2	5350.000	-5.69	59.77	54.08	74.00	-19.92	peak
3	5352.615	-5.67	49.00	43.33	54.00	-10.67	Average
4	5352.615	-5.67	61.09	55.42	74.00	-18.58	Peak


802.11AX40 Low Channel 1GHz-6.6GHz_HORIZONTAL

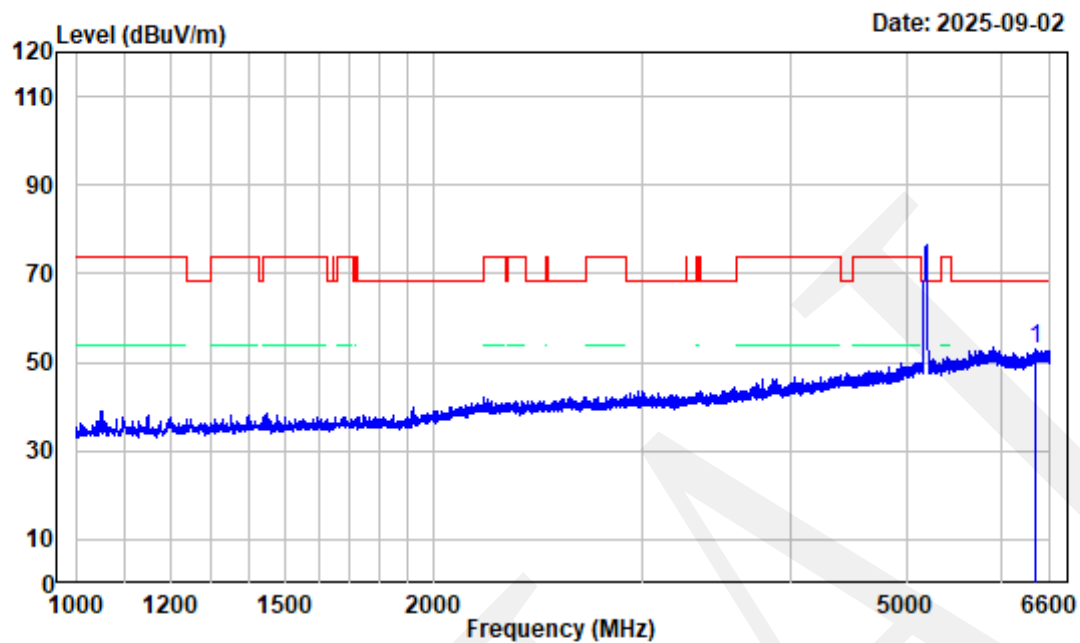

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5190MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6422.200	-3.57	56.37	52.80	68.20	-15.40 Peak

802.11AX40 Low Channel 1GHz-6.6GHz_VERTICAL

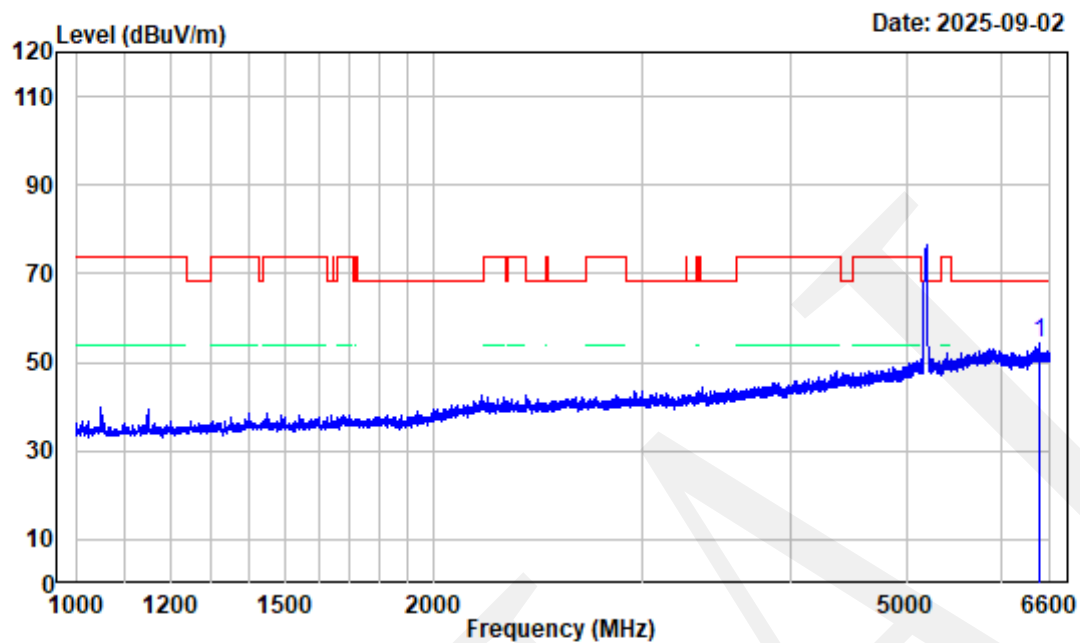

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5190MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6471.200	-3.62	57.82	54.20	68.20	-14.00	Peak

802.11AX40 Low Channel 6.6GHz-18GHz_HORIZONTAL

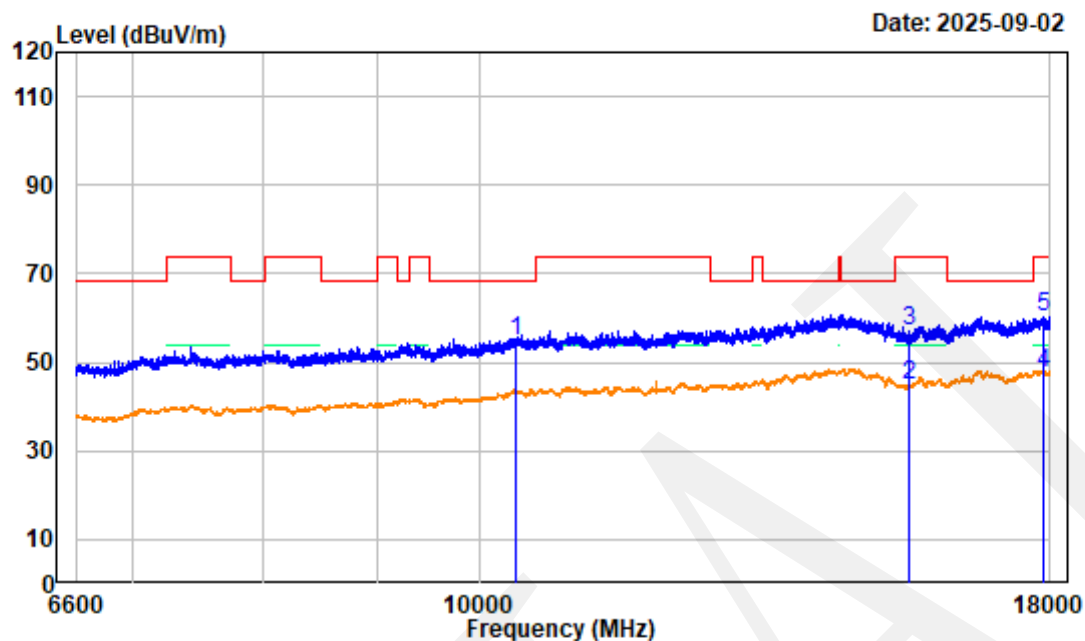

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5190MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10380.000	4.09	50.93	55.02	68.20	-13.18	peak
2	15570.000	4.80	40.01	44.81	54.00	-9.19	average
3	15570.000	4.80	52.05	56.85	74.00	-17.15	peak
4	17867.470	8.30	39.15	47.45	54.00	-6.55	Average
5	17867.470	8.30	51.91	60.21	74.00	-13.79	Peak

802.11AX40 Low Channel 6.6GHz-18GHz_VERTICAL

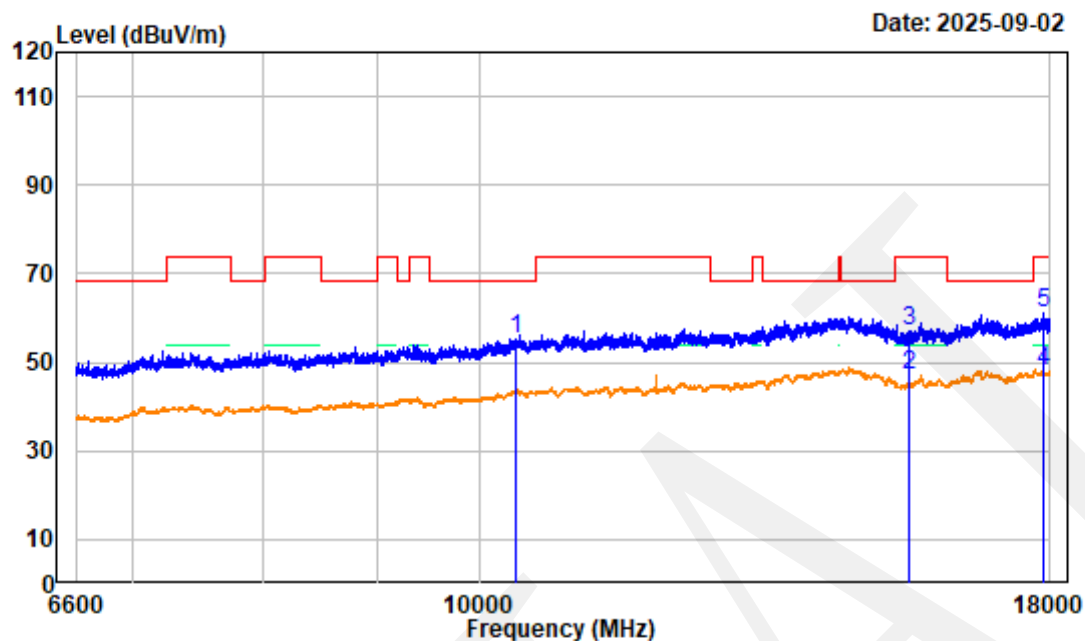

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5190MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10380.000	4.09	51.31	55.40	68.20	-12.80	peak
2	15570.000	4.80	42.35	47.15	54.00	-6.85	average
3	15570.000	4.80	52.38	57.18	74.00	-16.82	peak
4	17881.720	8.28	39.62	47.90	54.00	-6.10	Average
5	17881.720	8.28	52.78	61.06	74.00	-12.94	Peak

802.11AX40 Low Channel Bandedge_HORIZONTAL

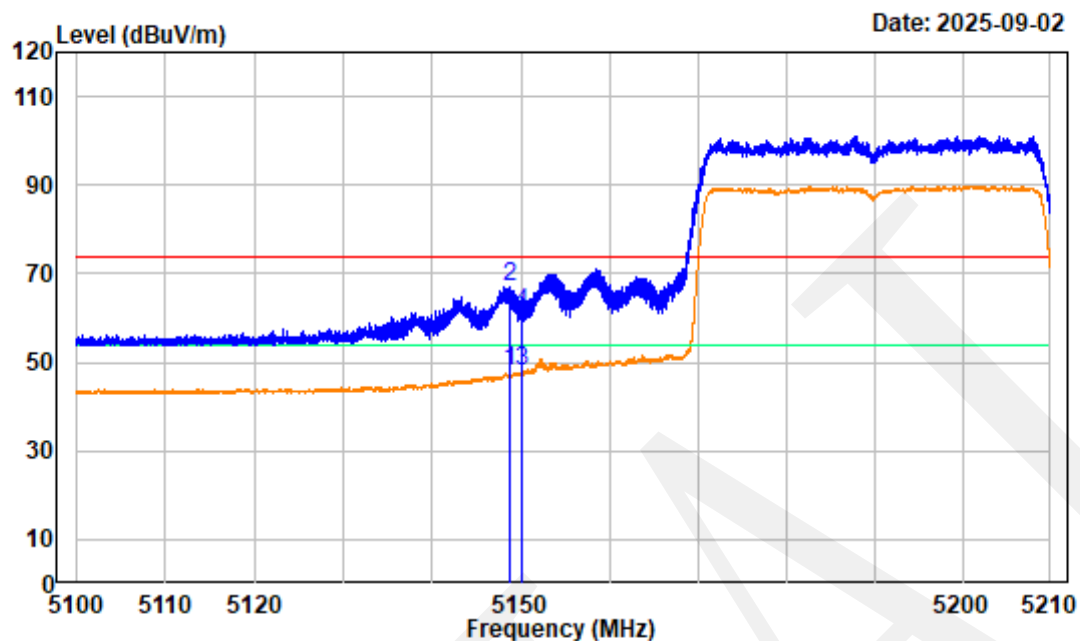

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5190MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.771	-6.04	54.10	48.06	54.00	-5.94	Average
2	5148.771	-6.04	73.19	67.15	74.00	-6.85	Peak
3	5150.000	-6.04	54.01	47.97	54.00	-6.03	average
4	5150.000	-6.04	67.08	61.04	74.00	-12.96	peak

802.11AX40 Low Channel Bandedge_VERTICAL

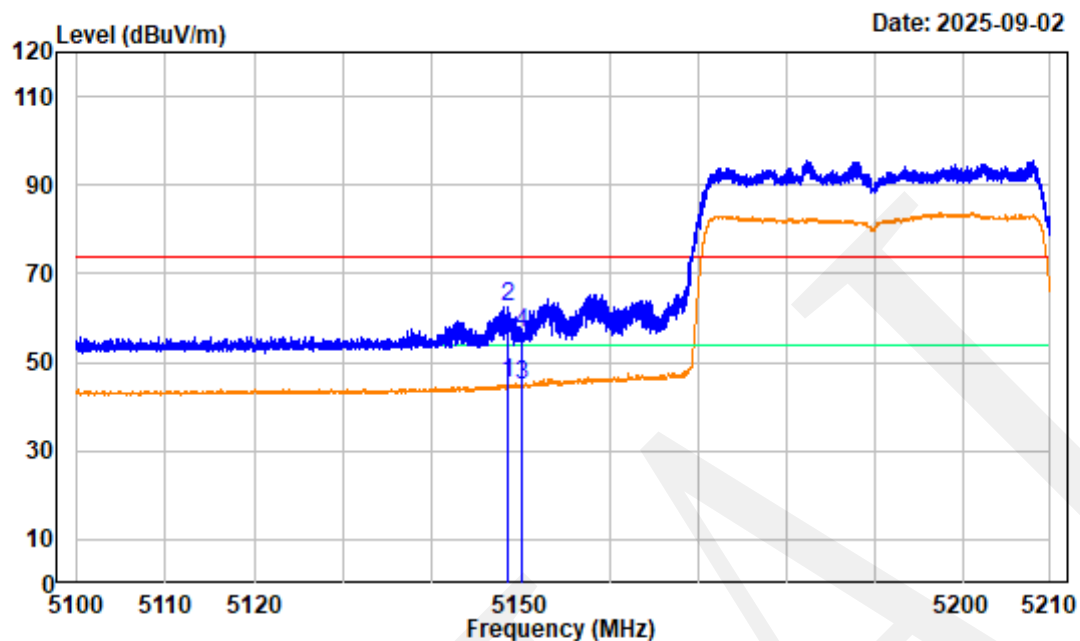

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5190MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.414	-6.04	51.19	45.15	54.00	-8.85	Average
2	5148.414	-6.04	68.56	62.52	74.00	-11.48	Peak
3	5150.000	-6.04	50.88	44.84	54.00	-9.16	average
4	5150.000	-6.04	62.52	56.48	74.00	-17.52	peak


802.11AX40 High Channel 1GHz-6.6GHz_HORIZONTAL

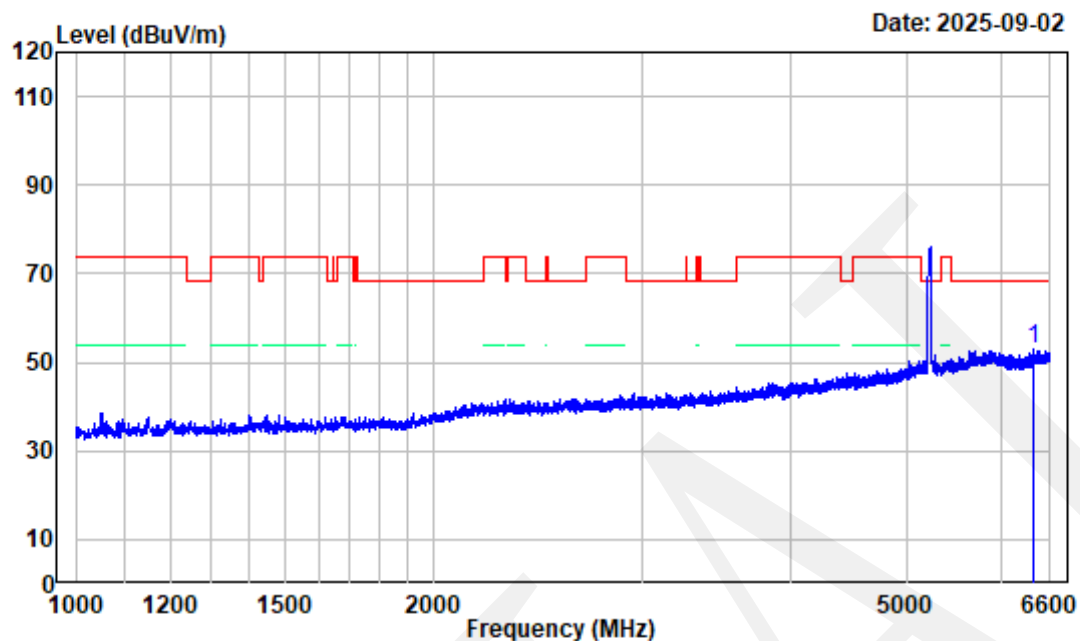

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5230MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6396.300	-3.72	56.65	52.93	68.20	-15.27 Peak


802.11AX40 High Channel 1GHz-6.6GHz_VERTICAL

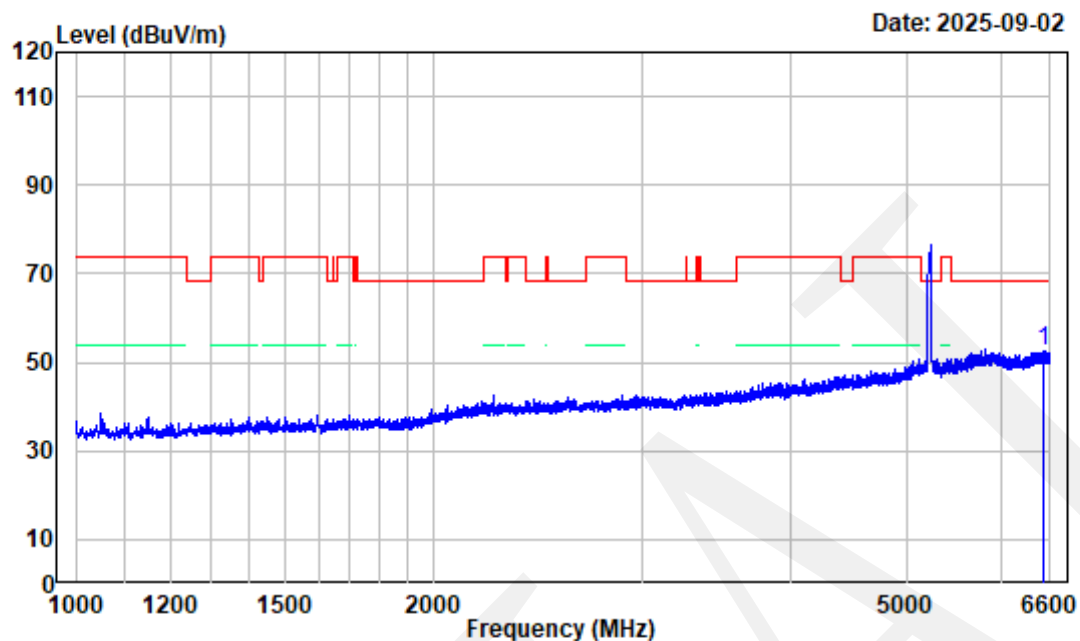

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5230MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6513.200	-3.79	56.44	52.65	68.20	-15.55 Peak

802.11AX40 High Channel 6.6GHz-18GHz_HORIZONTAL

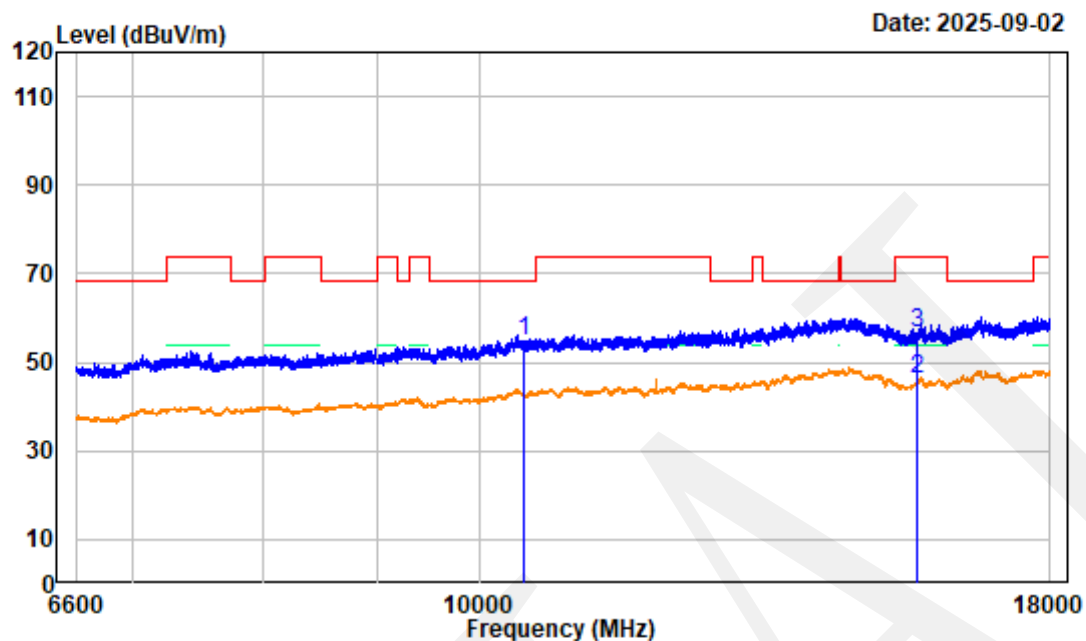


Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504U35143E-RF
 Test Mode : Transmitting
 Note : 802.11AX40 High Channel 5230MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Tester:Kevin Lv

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	4.20	50.55	54.75	68.20	-13.45	peak
2	15690.000	4.62	41.78	46.40	54.00	-7.60	average
3	15690.000	4.62	51.81	56.43	74.00	-17.57	peak

802.11AX40 High Channel 6.6GHz-18GHz_VERTICAL

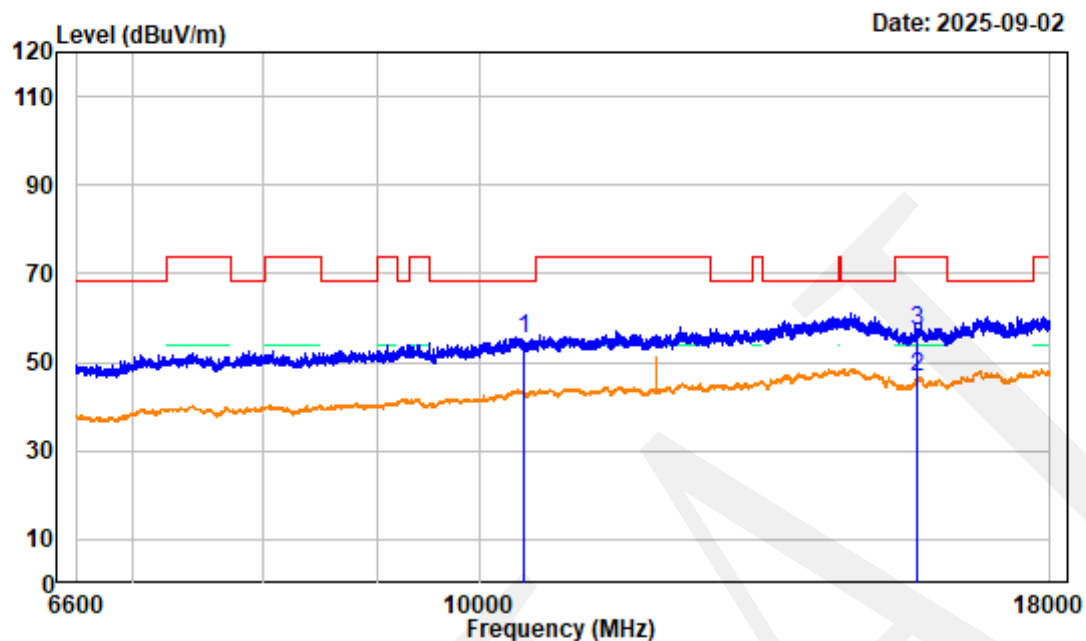

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5230MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10460.000	4.20	50.89	55.09	68.20	-13.11	peak
2 15690.000	4.62	41.92	46.54	54.00	-7.46	average
3 15690.000	4.62	52.59	57.21	74.00	-16.79	peak

802.11AX40 High Channel Bandedge_HORIZONTAL

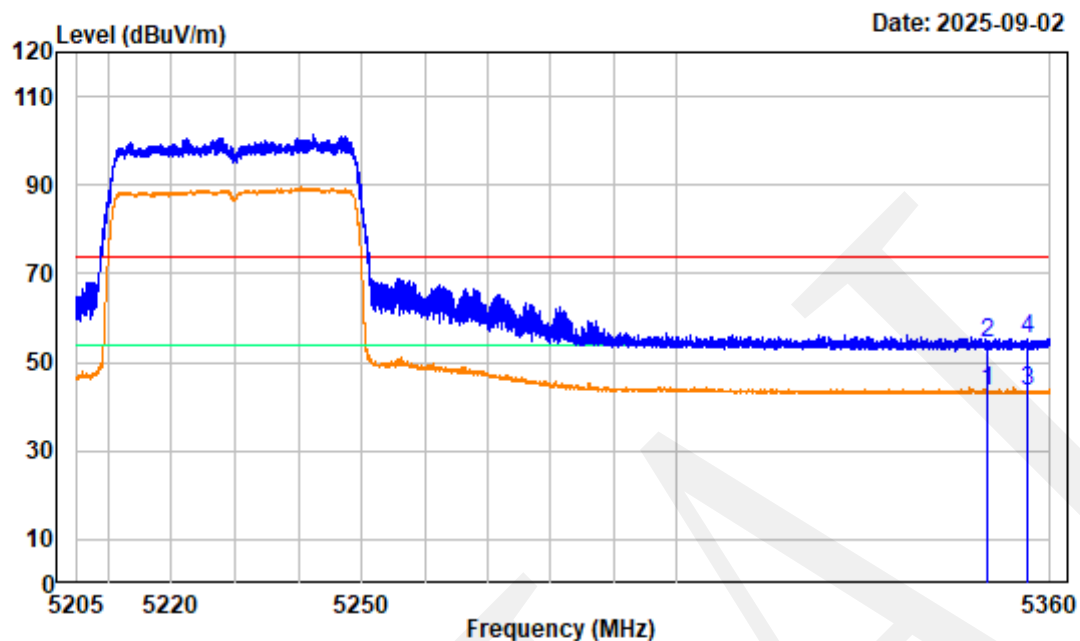

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5230MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	49.19	43.50	54.00	-10.50	Average
2	5350.000	-5.69	59.86	54.17	74.00	-19.83	peak
3	5356.377	-5.66	49.18	43.52	54.00	-10.48	Average
4	5356.377	-5.66	61.07	55.41	74.00	-18.59	Peak

802.11AX40 High Channel Bandedge_VERTICAL

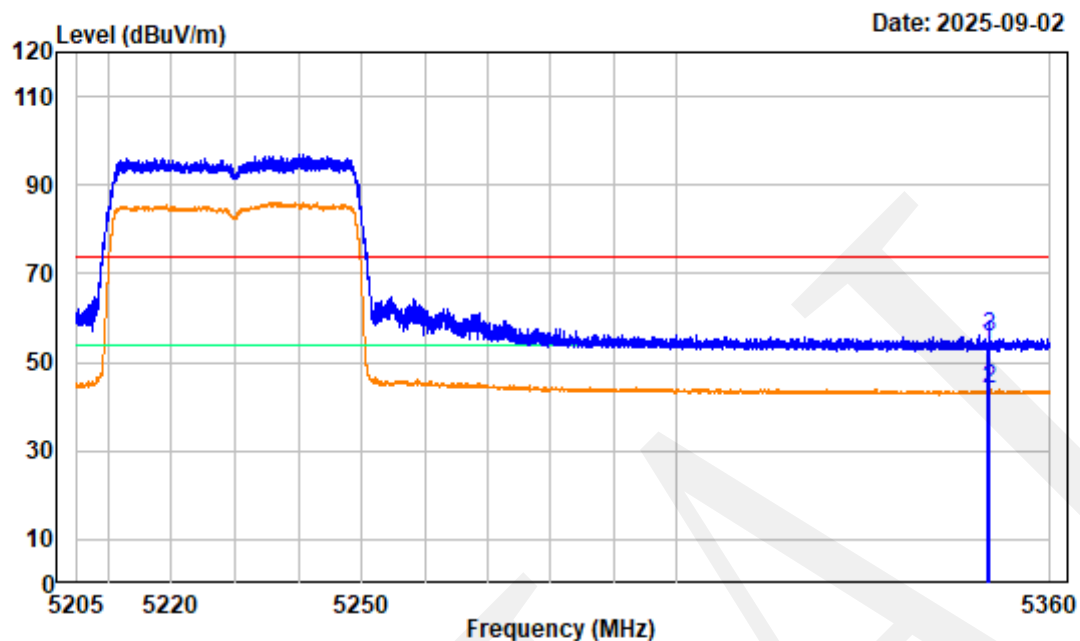

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5230MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	59.51	53.82	74.00	-20.18	peak
2	5350.138	-5.69	49.52	43.83	54.00	-10.17	Average
3	5350.138	-5.69	61.20	55.51	74.00	-18.49	Peak

802.11AX80 Channel 1GHz-6.6GHz_HORIZONTAL

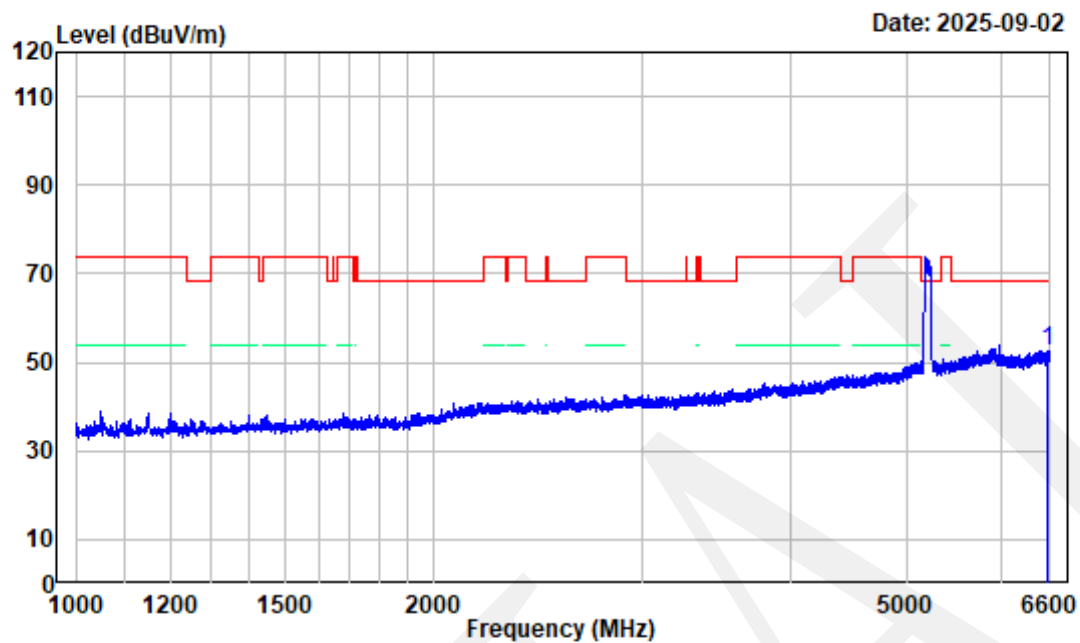

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX80 Channel 5210MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6567.800	-3.58	56.33	52.75	68.20	-15.45 Peak

802.11AX80 Channel 1GHz-6.6GHz_VERTICAL

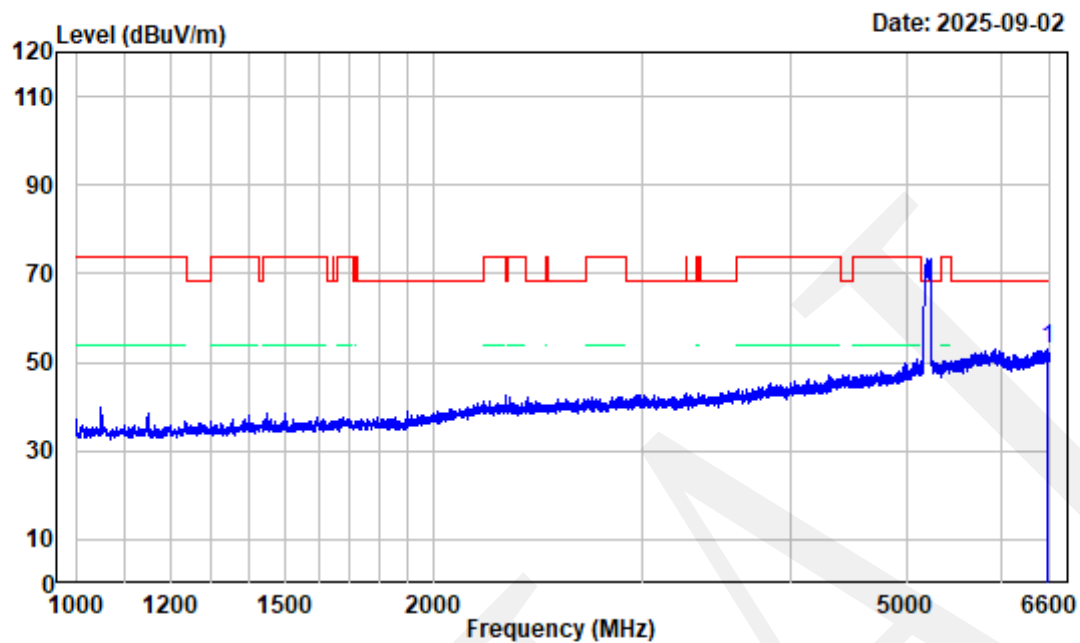

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX80 Channel 5210MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6573.400	-3.57	56.52	52.95	68.20	-15.25 Peak


802.11AX80 Channel 6.6GHz-18GHz_HORIZONTAL

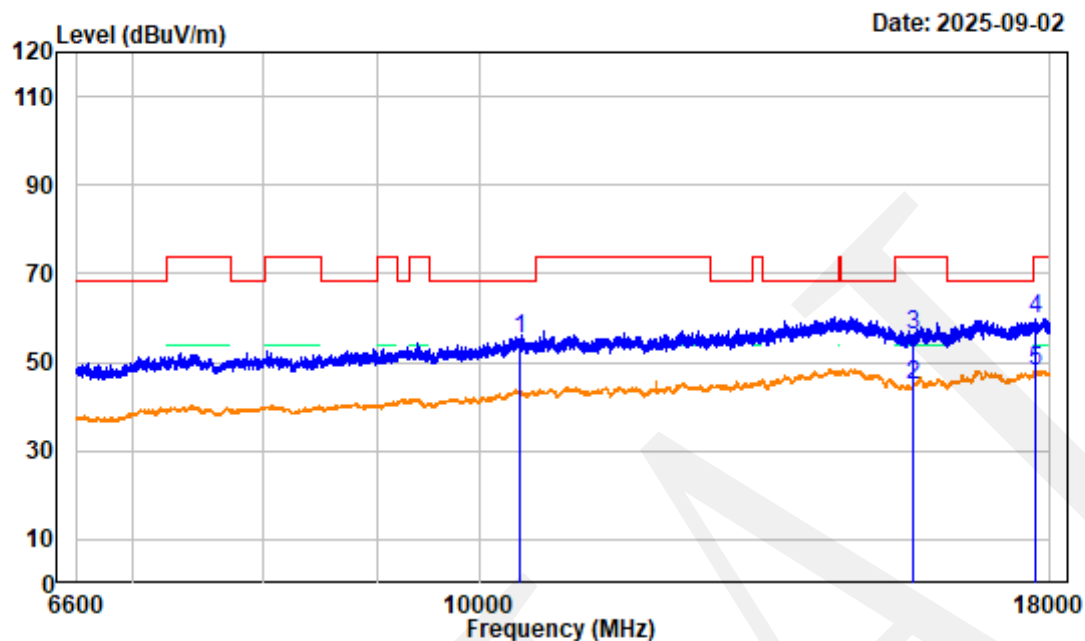

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504U35143E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX80 Channel 5210MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10420.000	4.22	50.98	55.20	68.20	-13.00	peak
2	15630.000	4.68	40.28	44.96	54.00	-9.04	average
3	15630.000	4.68	51.25	55.93	74.00	-18.07	peak
4	17719.280	7.69	52.25	59.94	74.00	-14.06	Peak
5	17719.280	7.69	40.21	47.90	54.00	-6.10	Average

802.11AX80 Channel 6.6GHz-18GHz_VERTICAL

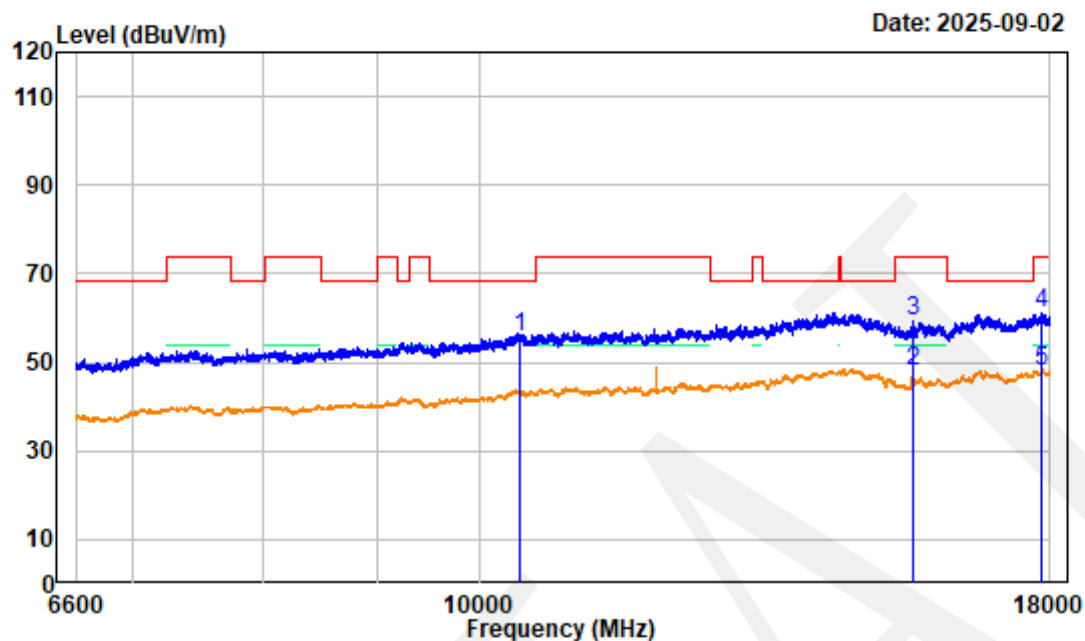

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX80 Channel 5210MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10420.000	4.22	51.66	55.88	68.20	-12.32	peak
2	15630.000	4.68	43.19	47.87	54.00	-6.13	average
3	15630.000	4.68	54.66	59.34	74.00	-14.66	peak
4	17850.380	8.33	52.59	60.92	74.00	-13.08	Peak
5	17850.380	8.33	39.54	47.87	54.00	-6.13	Average


802.11AX80 Channel Bandedge_HORIZONTAL

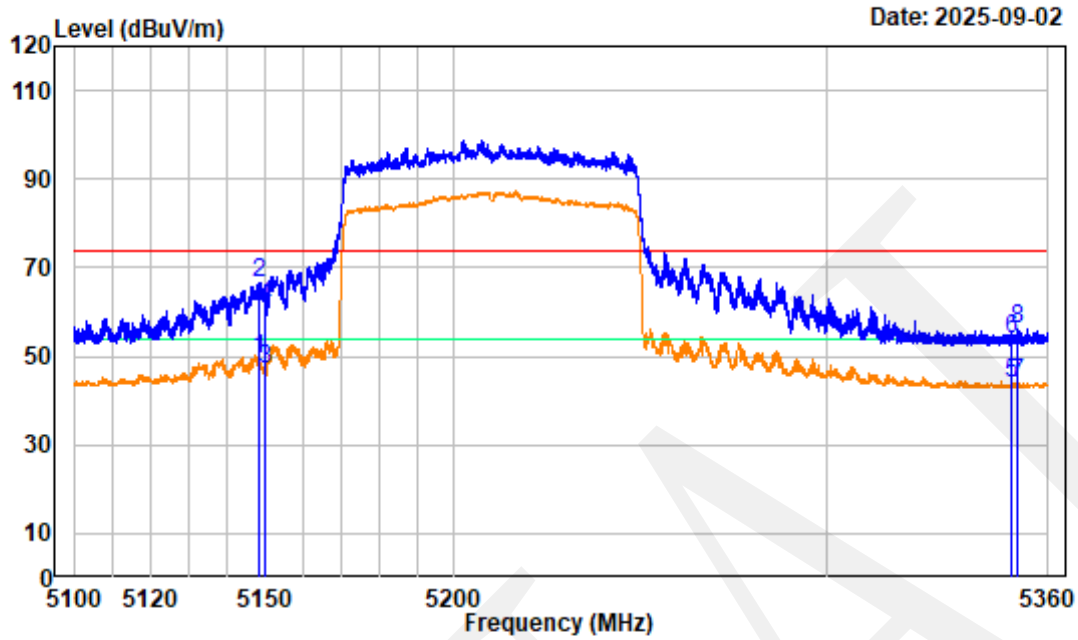

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504U35143E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX80 Channel 5210MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.620	-6.04	55.62	49.58	54.00	-4.42	Average
2	5148.620	-6.04	72.59	66.55	74.00	-7.45	Peak
3	5150.000	-6.04	53.21	47.17	54.00	-6.83	average
4	5150.000	-6.04	67.25	61.21	74.00	-12.79	peak
5	5350.000	-5.69	49.43	43.74	54.00	-10.26	average
6	5350.000	-5.69	59.62	53.93	74.00	-20.07	peak
7	5351.453	-5.69	49.50	43.81	54.00	-10.19	Average
8	5351.453	-5.69	61.88	56.19	74.00	-17.81	Peak

802.11AX80 Channel Bandedge_VERTICAL

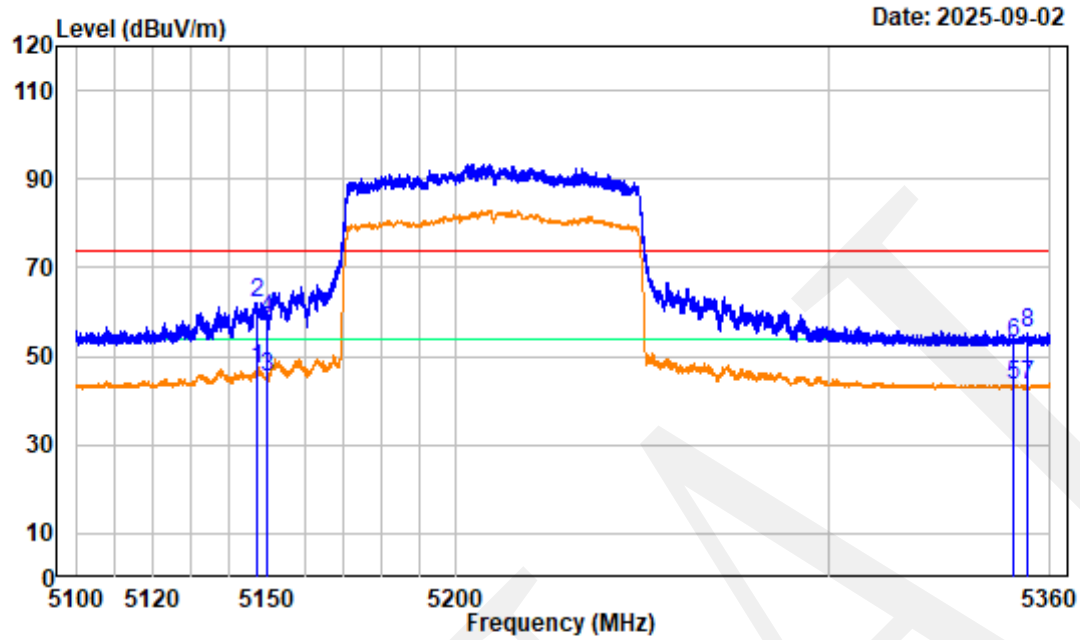

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504U35143E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX80 Channel 5210MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.515	-6.04	53.25	47.21	54.00	-6.79	Average
2	5147.515	-6.04	68.22	62.18	74.00	-11.82	Peak
3	5150.000	-6.04	51.25	45.21	54.00	-8.79	average
4	5150.000	-6.04	64.27	58.23	74.00	-15.77	peak
5	5350.000	-5.69	49.18	43.49	54.00	-10.51	average
6	5350.000	-5.69	58.83	53.14	74.00	-20.86	peak
7	5353.825	-5.67	49.18	43.51	54.00	-10.49	Average
8	5353.825	-5.67	61.14	55.47	74.00	-18.53	Peak

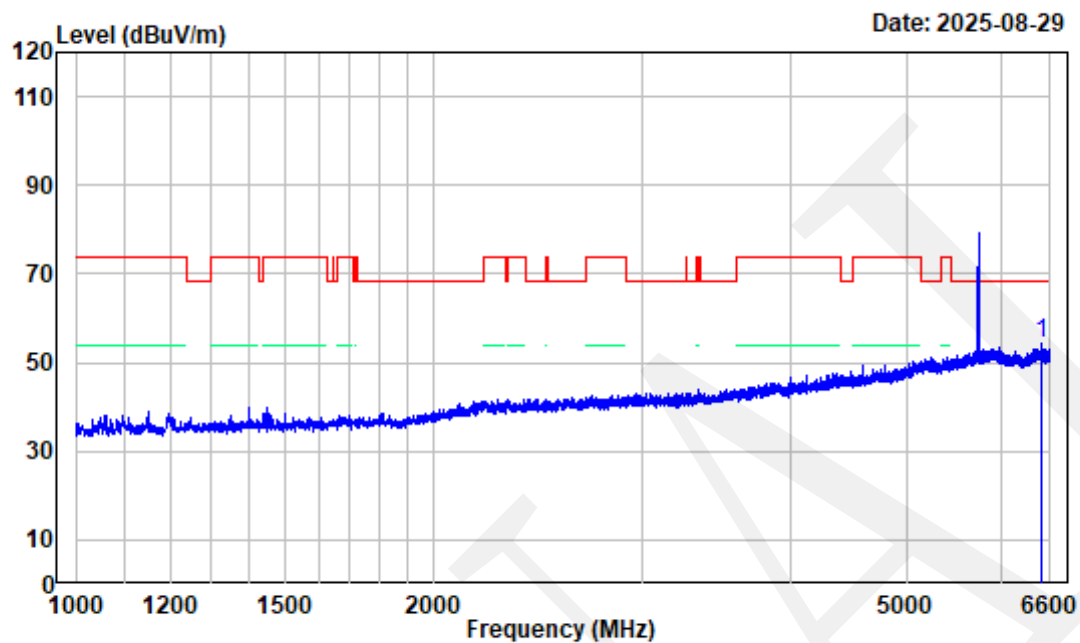For band4:**802.11A Low Channel 1GHz-6.6GHz_HORIZONTAL**

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5745MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq Factor		Read	Limit	Over	Remark
	MHz	dB/m	Level	Line	Limit	
			dBuV	dBuV/m	dBuV/m	
1	6496.400	-3.82	58.00	54.18	68.20	-14.02 peak

802.11A Low Channel 1GHz-6.6GHz_VERTICAL

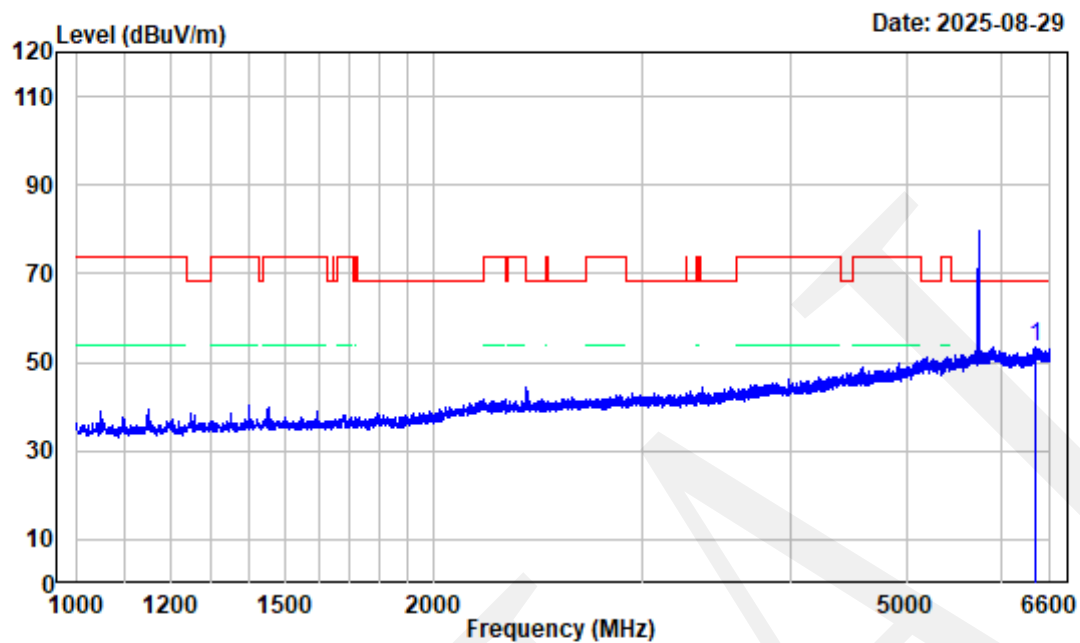

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5745MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6427.100	-3.55	56.90	53.35	68.20	-14.85 peak

802.11A Low Channel 6.6GHz-18GHz_HORIZONTAL

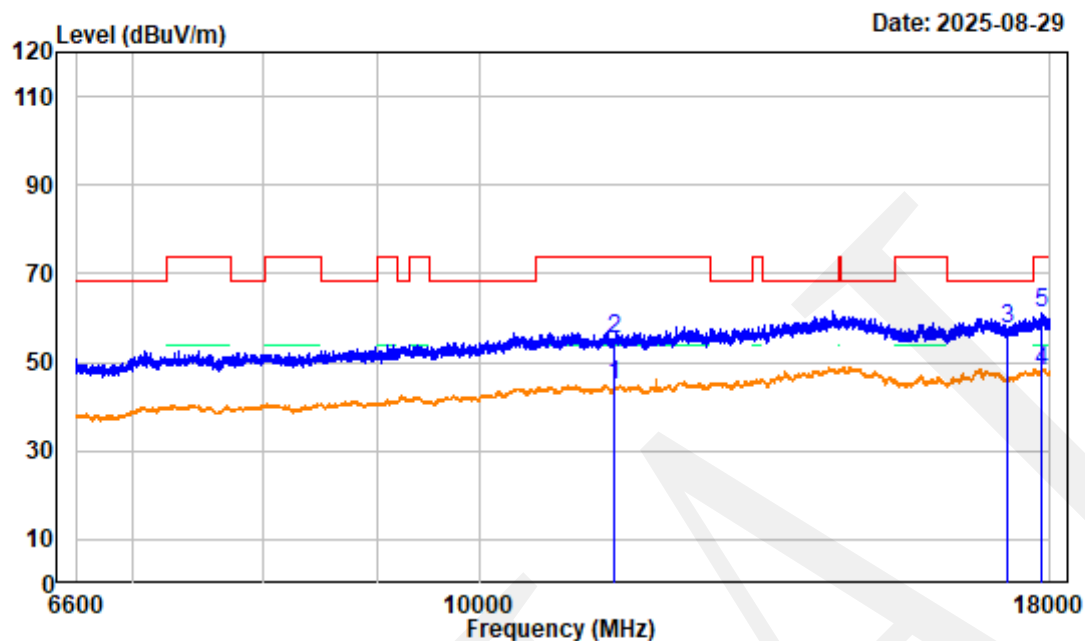

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5745MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.24	38.66	44.90	54.00	-9.10	average
2	11490.000	6.24	48.93	55.17	74.00	-18.83	peak
3	17235.000	6.82	50.91	57.73	68.20	-10.47	peak
4	17857.500	8.31	39.59	47.90	54.00	-6.10	average
5	17857.500	8.31	52.67	60.98	74.00	-13.02	peak

802.11A Low Channel 6.6GHz-18GHz_VERTICAL

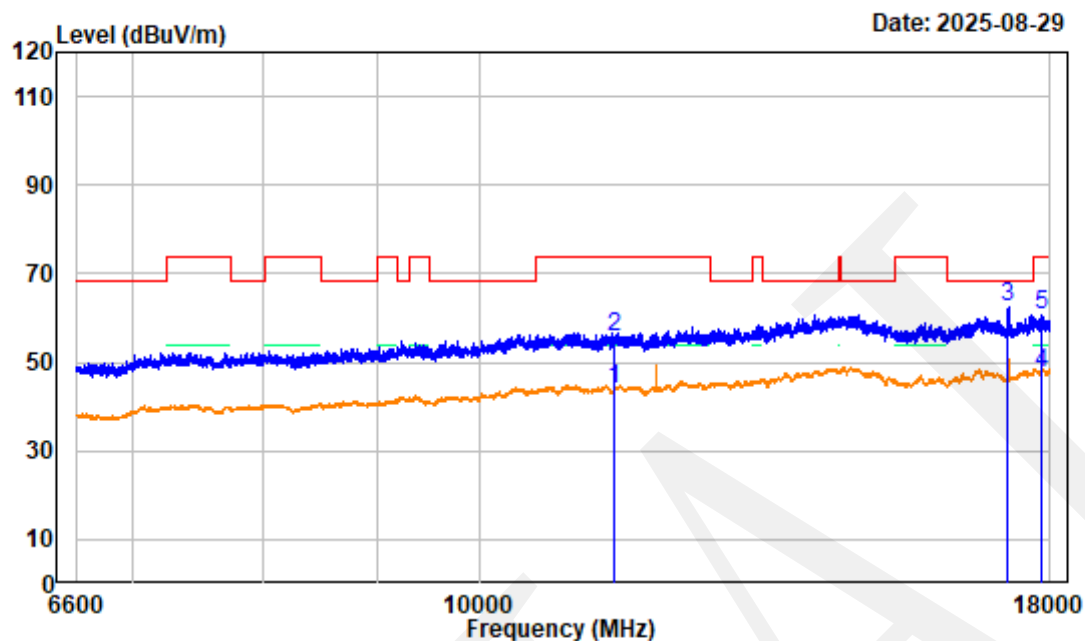

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5745MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.24	37.62	43.86	54.00	-10.14	Average
2	11490.000	6.24	49.60	55.84	74.00	-18.16	peak
3	17235.000	6.82	55.59	62.41	68.20	-5.79	peak
4	17853.220	8.32	39.45	47.77	54.00	-6.23	average
5	17853.220	8.32	52.14	60.46	74.00	-13.54	peak

802.11A Low Channel Bandedge_HORIZONTAL

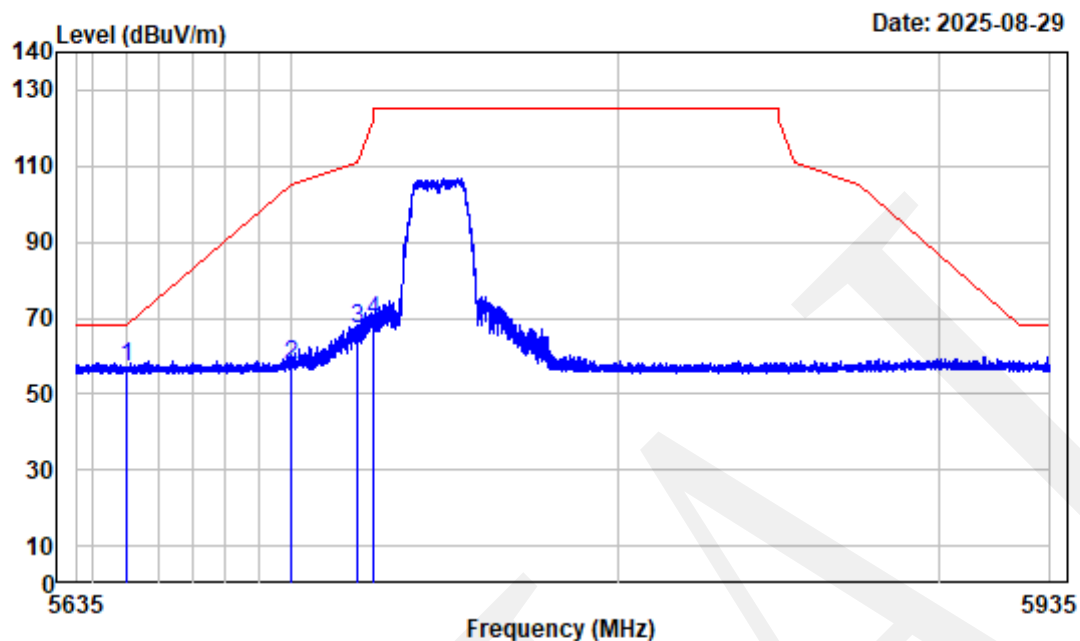

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5745MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	61.92	57.20	68.20	-11.00	peak
2	5700.000	-4.35	61.72	57.37	105.20	-47.83	peak
3	5720.000	-4.43	71.38	66.95	110.80	-43.85	peak
4	5725.000	-4.45	73.76	69.31	122.20	-52.89	peak

802.11A Low Channel Bandedge_VERTICAL

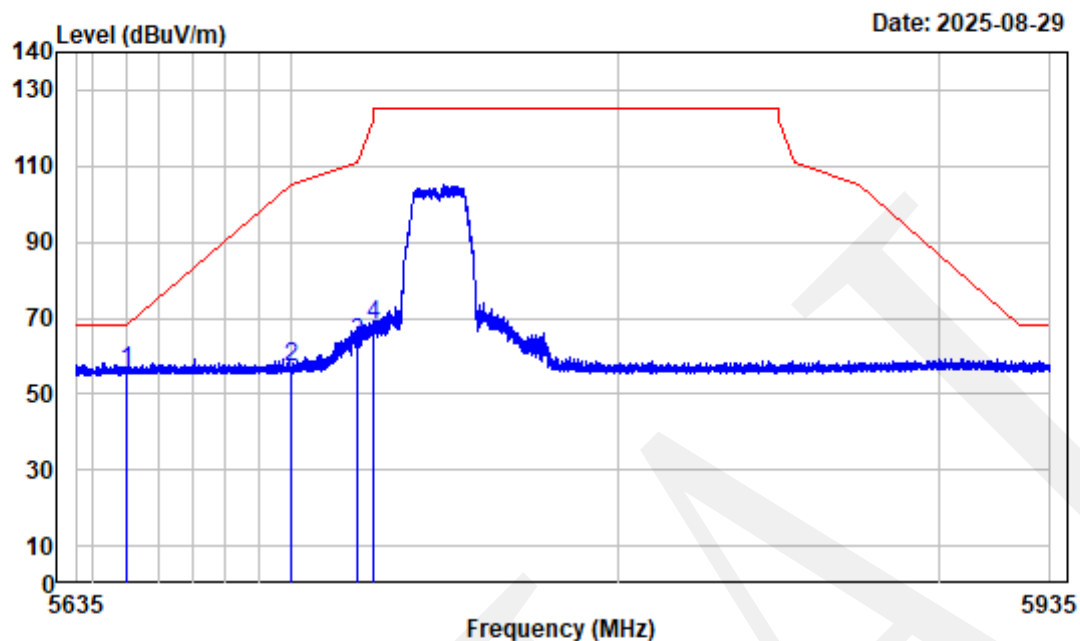

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5745MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	60.84	56.12	68.20	-12.08	peak
2	5700.000	-4.35	61.55	57.20	105.20	-48.00	peak
3	5720.000	-4.43	67.70	63.27	110.80	-47.53	peak
4	5725.000	-4.45	72.63	68.18	122.20	-54.02	peak


802.11A Middle Channel 1GHz-6.6GHz_HORIZONTAL

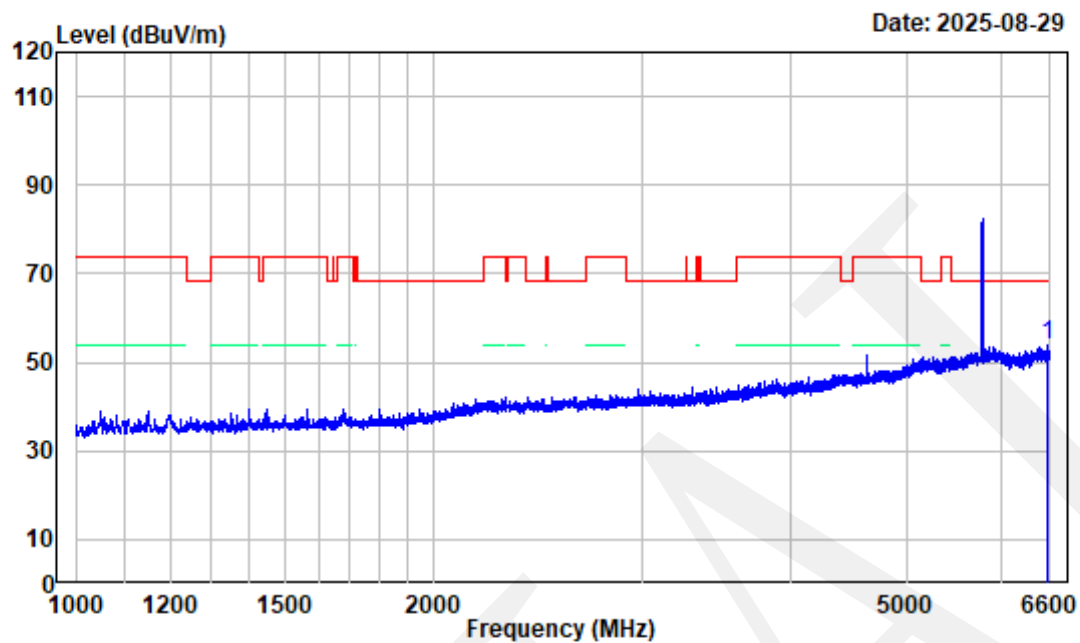

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5785MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6574.100	-3.57	57.52	53.95	68.20	-14.25 peak


802.11A Middle Channel 1GHz-6.6GHz_VERTICAL

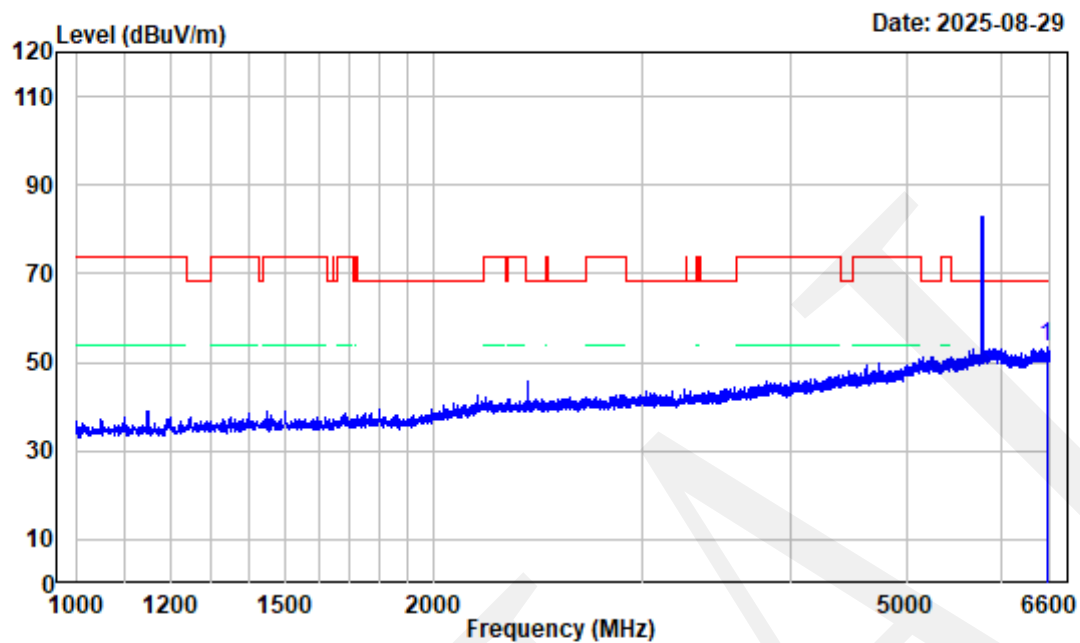

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5785MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6555.200	-3.62	56.99	53.37	68.20	-14.83 peak

802.11A Middle Channel 6.6GHz-18GHz_HORIZONTAL

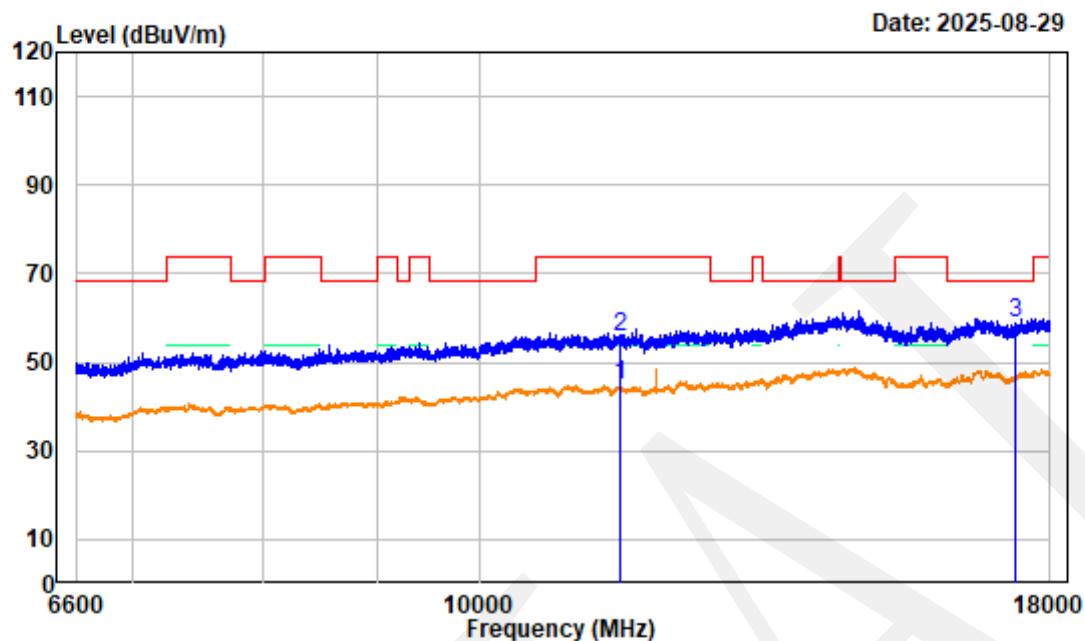

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Middle Channel 5785MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	6.02	38.82	44.84	54.00	-9.16	Average
2	11570.000	6.02	49.78	55.80	74.00	-18.20	peak
3	17355.000	6.60	52.23	58.83	68.20	-9.37	peak

802.11A Middle Channel 6.6GHz-18GHz_VERTICAL

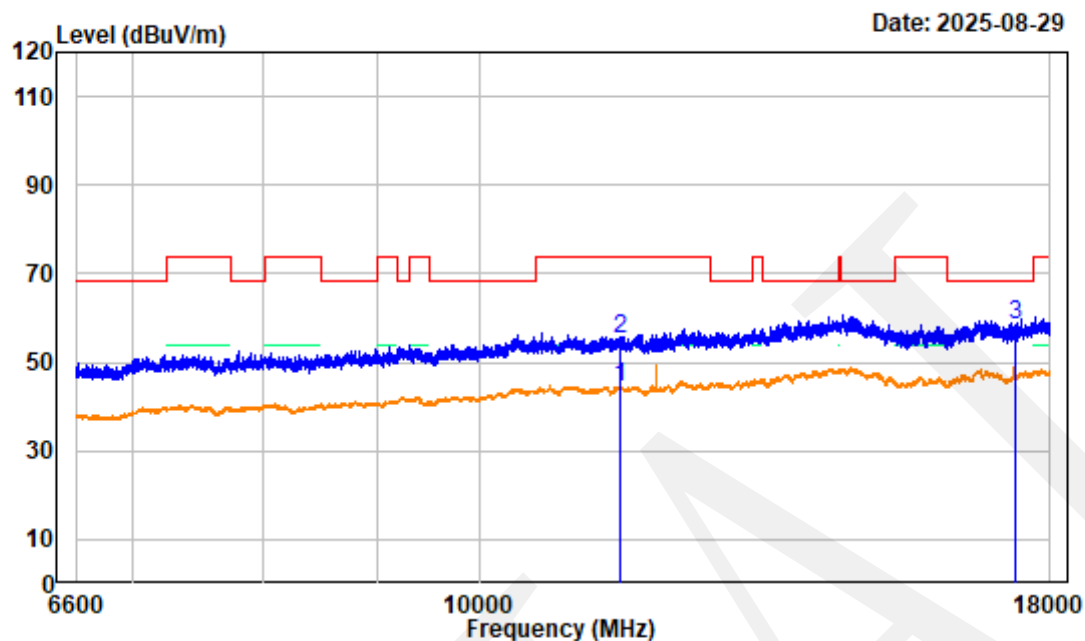

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Middle Channel 5785MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	6.02	38.14	44.16	54.00	-9.84	Average
2	11570.000	6.02	49.10	55.12	74.00	-18.88	peak
3	17355.000	6.60	51.89	58.49	68.20	-9.71	peak

802.11A High Channel 1GHz-6.6GHz_HORIZONTAL

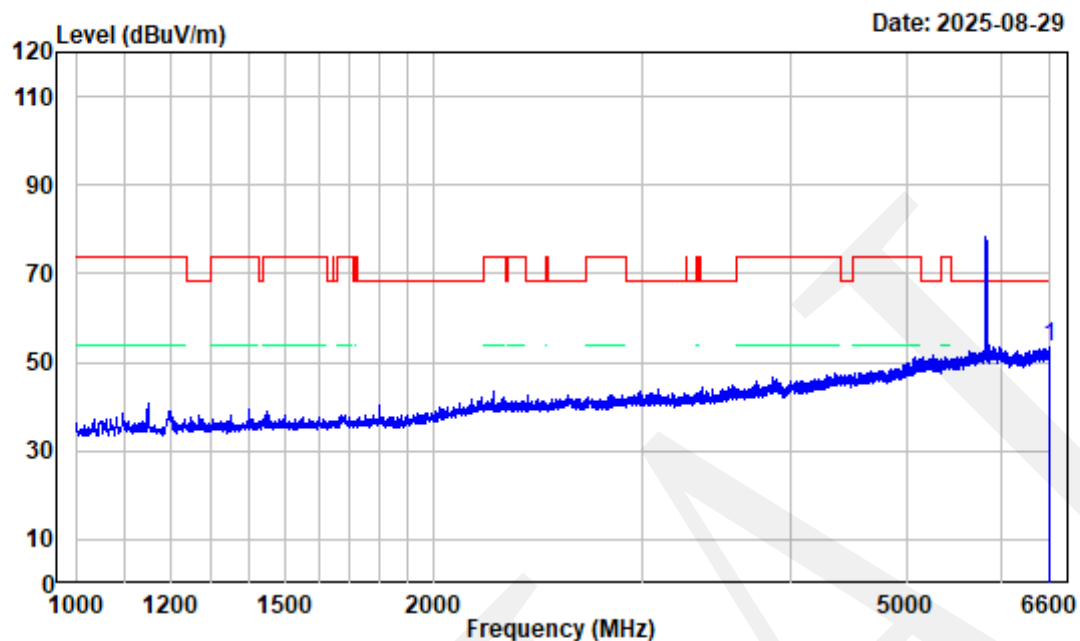

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5825MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6595.100	-3.50	57.13	53.63	68.20	-14.57 peak

802.11A High Channel 1GHz-6.6GHz_VERTICAL

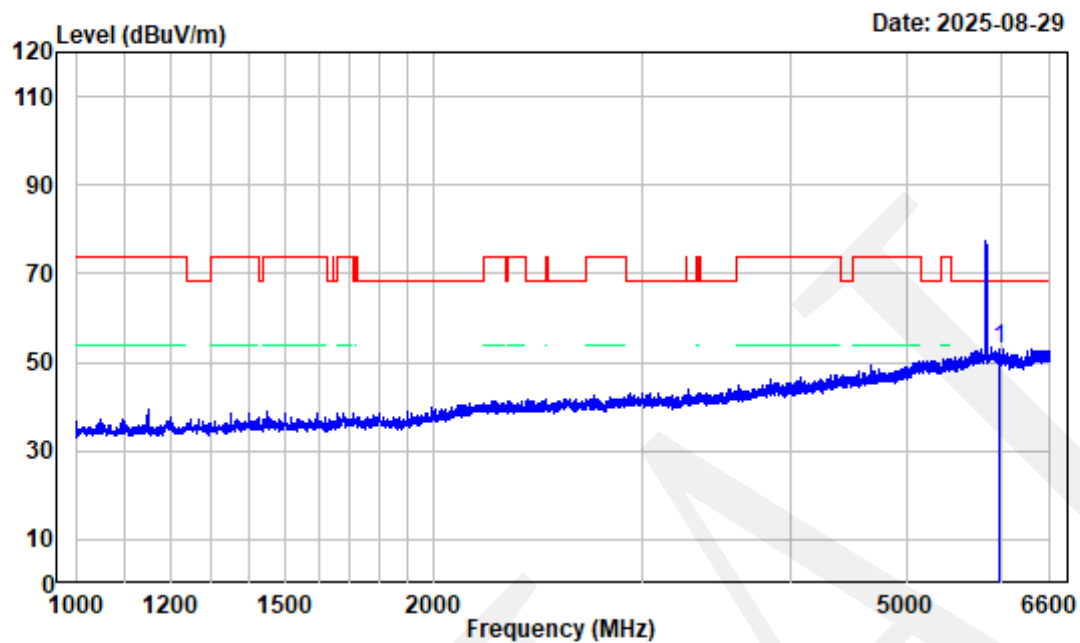

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5825MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5991.700	-4.86	57.85	52.99	68.20	-15.21	peak

802.11A High Channel 6.6GHz-18GHz_HORIZONTAL

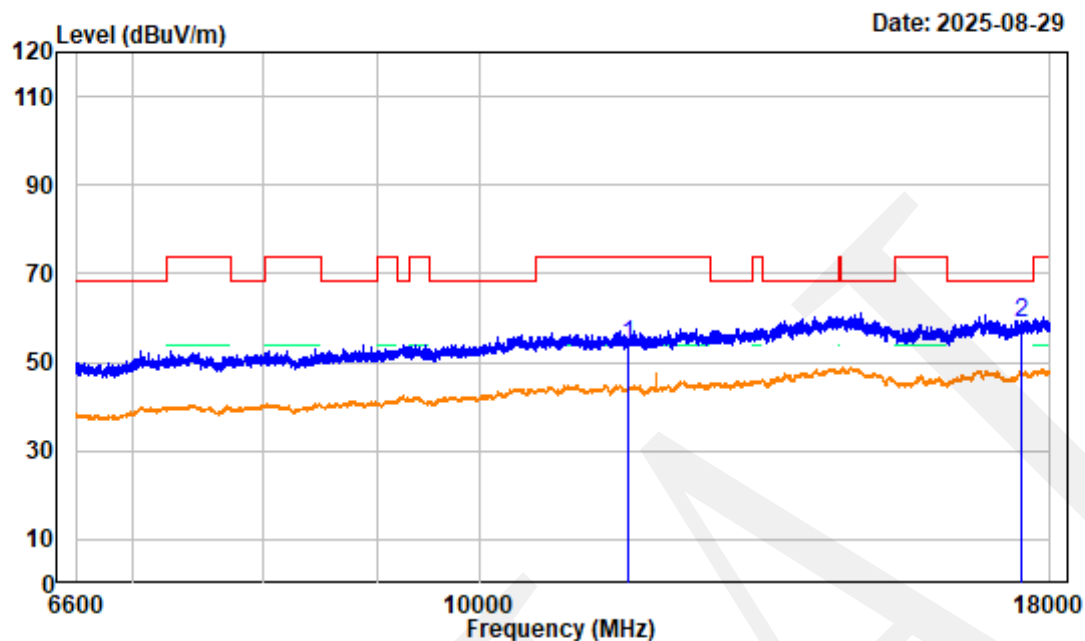

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5825MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.36	48.44	53.80	74.00	-20.20	peak
2	17475.000	7.21	51.52	58.73	68.20	-9.47	peak

802.11A High Channel 6.6GHz-18GHz_VERTICAL

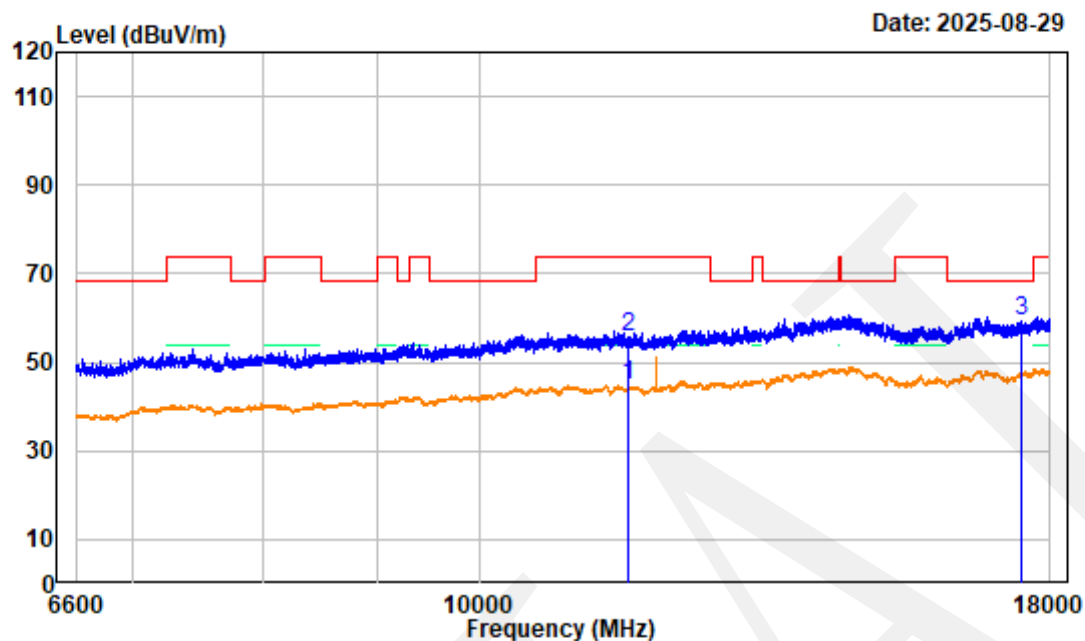

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5825MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.36	39.28	44.64	54.00	-9.36	Average
2	11650.000	5.36	50.31	55.67	74.00	-18.33	peak
3	17475.000	7.21	52.25	59.46	68.20	-8.74	peak

802.11A High Channel Bandedge_HORIZONTAL

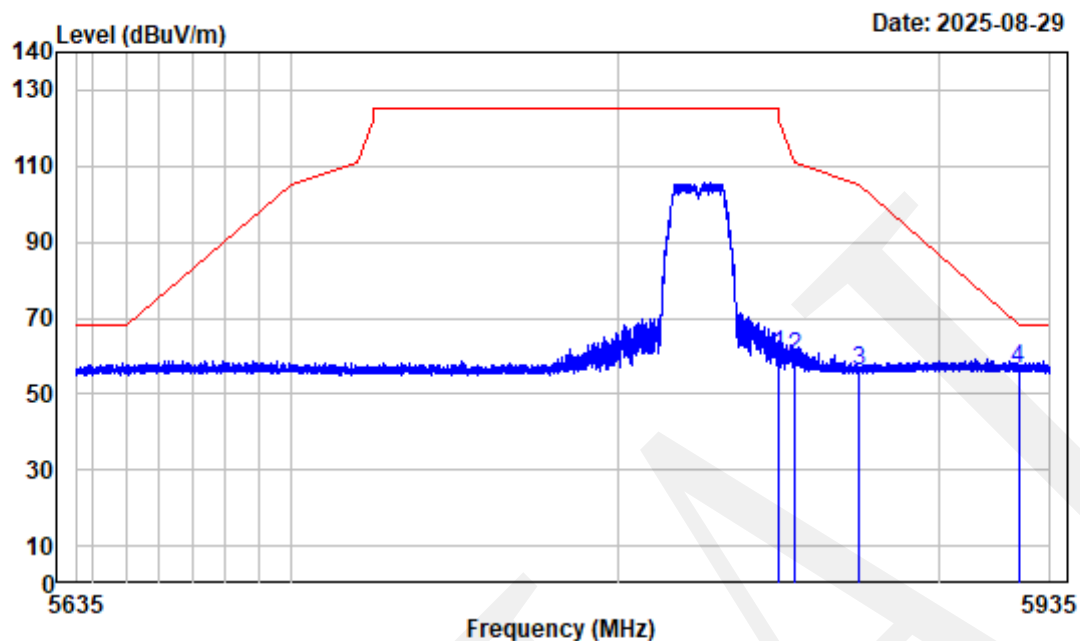

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5825MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	64.67	60.13	122.20	-62.07	peak
2	5855.000	-4.48	63.93	59.45	110.80	-51.35	peak
3	5875.000	-4.20	60.13	55.93	105.20	-49.27	peak
4	5925.000	-4.27	60.56	56.29	68.20	-11.91	peak

802.11A High Channel Bandedge_VERTICAL

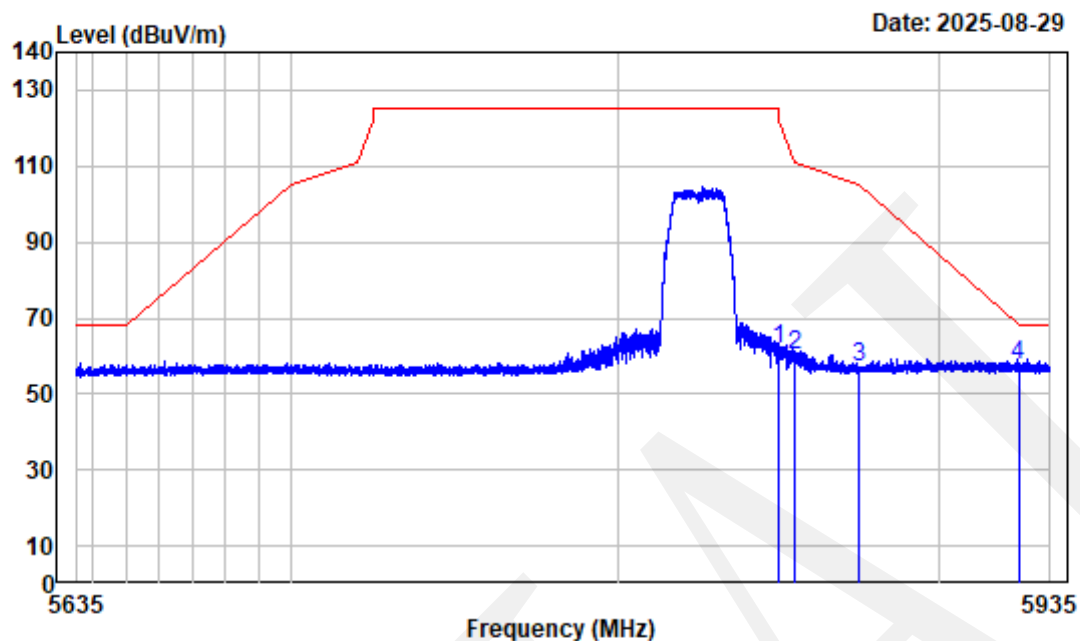

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5825MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	66.18	61.64	122.20	-60.56	peak
2	5855.000	-4.48	64.92	60.44	110.80	-50.36	peak
3	5875.000	-4.20	61.06	56.86	105.20	-48.34	peak
4	5925.000	-4.27	61.66	57.39	68.20	-10.81	peak

802.11AC20 Low Channel Bangedge_HORIZONTAL

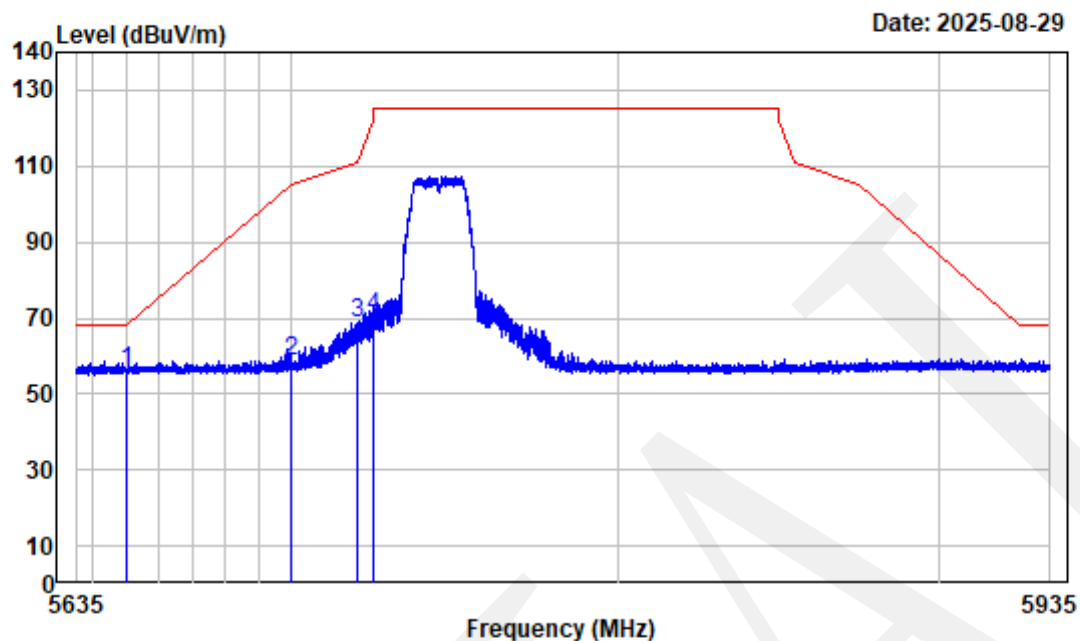

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5745MHz Bangedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	60.67	55.95	68.20	-12.25	peak
2	5700.000	-4.35	63.03	58.68	105.20	-46.52	peak
3	5720.000	-4.43	72.96	68.53	110.80	-42.27	peak
4	5725.000	-4.45	74.54	70.09	122.20	-52.11	peak

802.11AC20 Low Channel Bangedge_VERTICAL

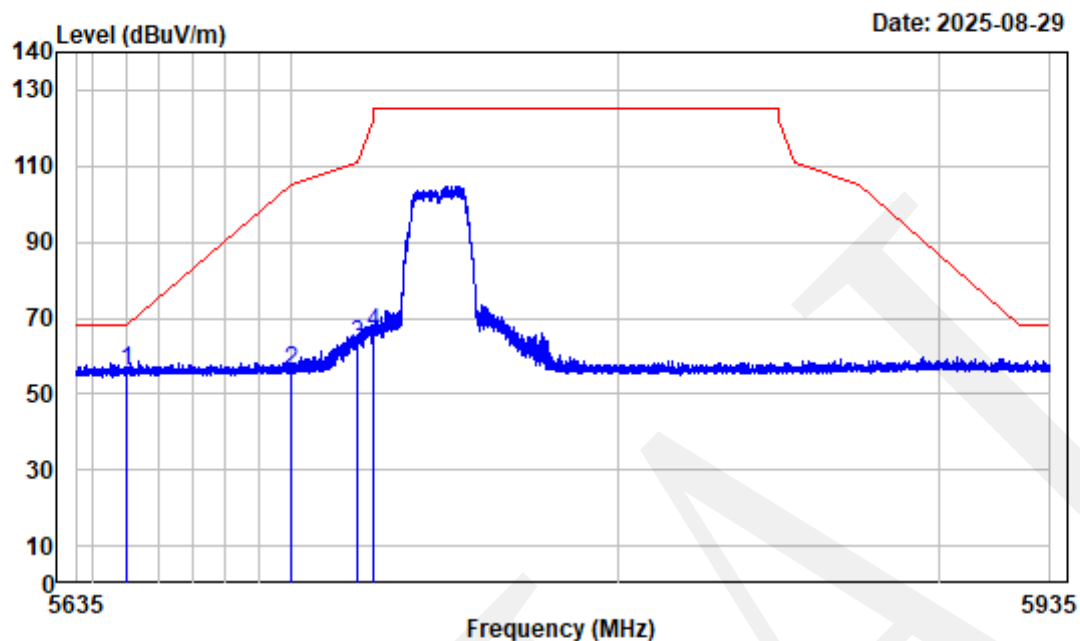

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5745MHz Bangedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	60.67	55.95	68.20	-12.25	peak
2	5700.000	-4.35	60.60	56.25	105.20	-48.95	peak
3	5720.000	-4.43	67.17	62.74	110.80	-48.06	peak
4	5725.000	-4.45	70.35	65.90	122.20	-56.30	peak

802.11AC20 Low Channel 1GHz-6.6GHz_HORIZONTAL

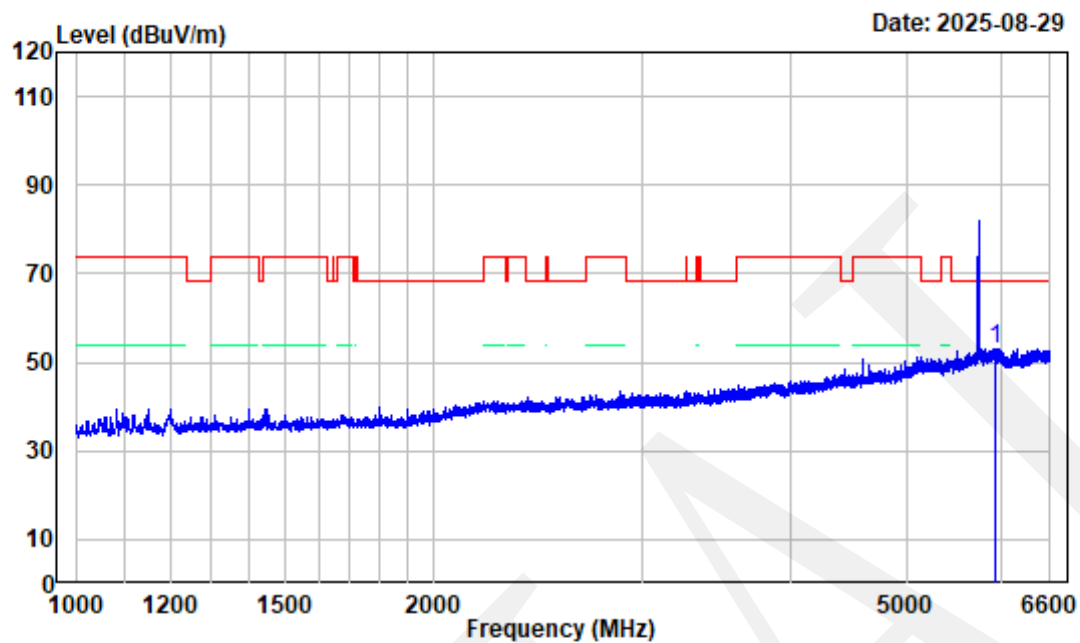

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5745MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5944.800	-4.58	57.70	53.12	68.20	-15.08	peak


802.11AC20 Low Channel 1GHz-6.6GHz_VERTICAL

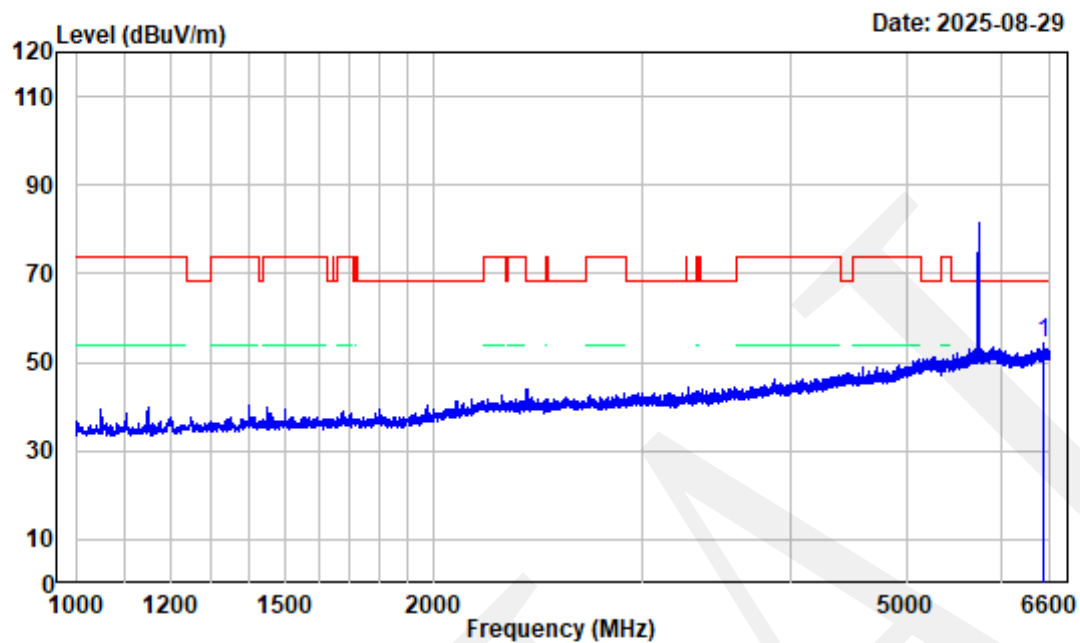

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5745MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6508.300	-3.81	57.93	54.12	68.20	-14.08 peak

802.11AC20 Low Channel 6.6GHz-18GHz_HORIZONTAL

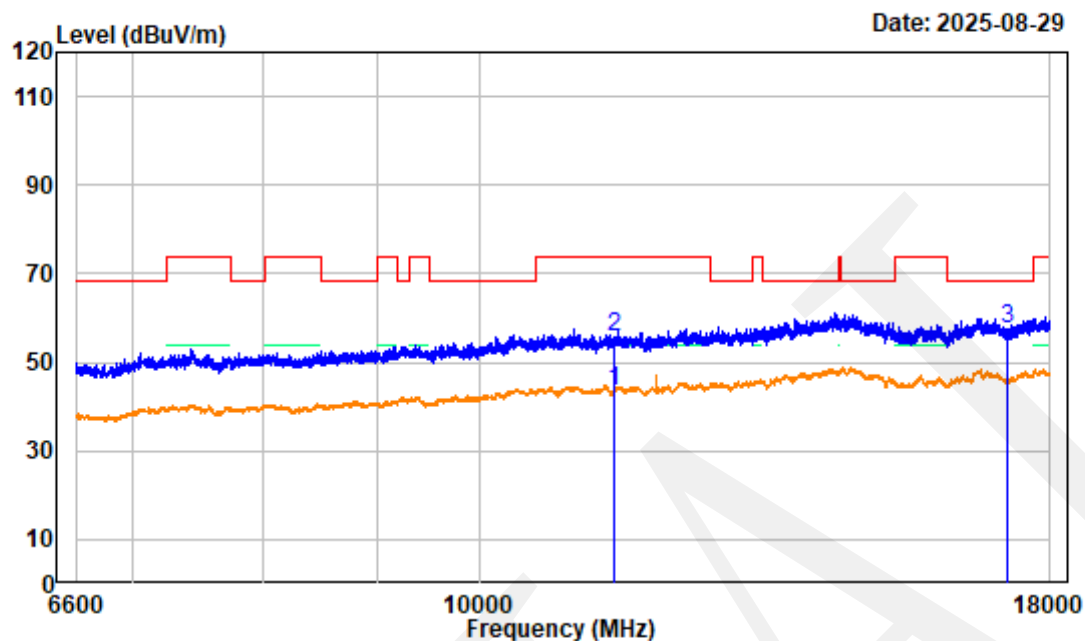

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5745MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.24	37.42	43.66	54.00	-10.34	Average
2	11490.000	6.24	49.46	55.70	74.00	-18.30	peak
3	17235.000	6.82	50.65	57.47	68.20	-10.73	peak


802.11AC20 Low Channel 6.6GHz-18GHz_VERTICAL

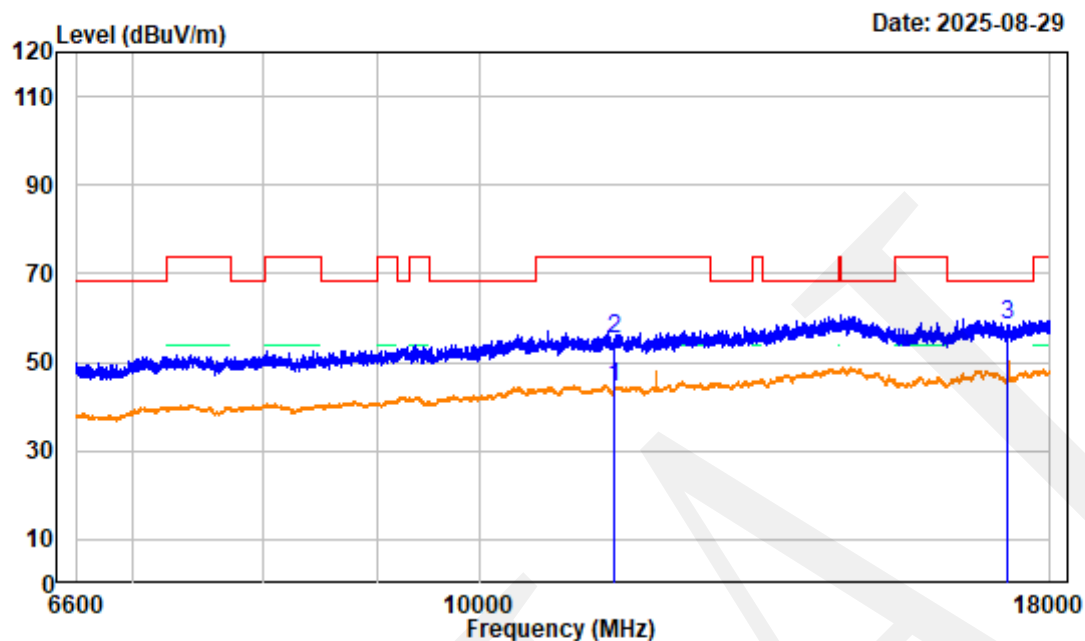

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504U35143E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC20 Low Channel 5745MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.24	38.10	44.34	54.00	-9.66	Average
2	11490.000	6.24	49.08	55.32	74.00	-18.68	peak
3	17235.000	6.82	51.61	58.43	68.20	-9.77	peak

802.11AC20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

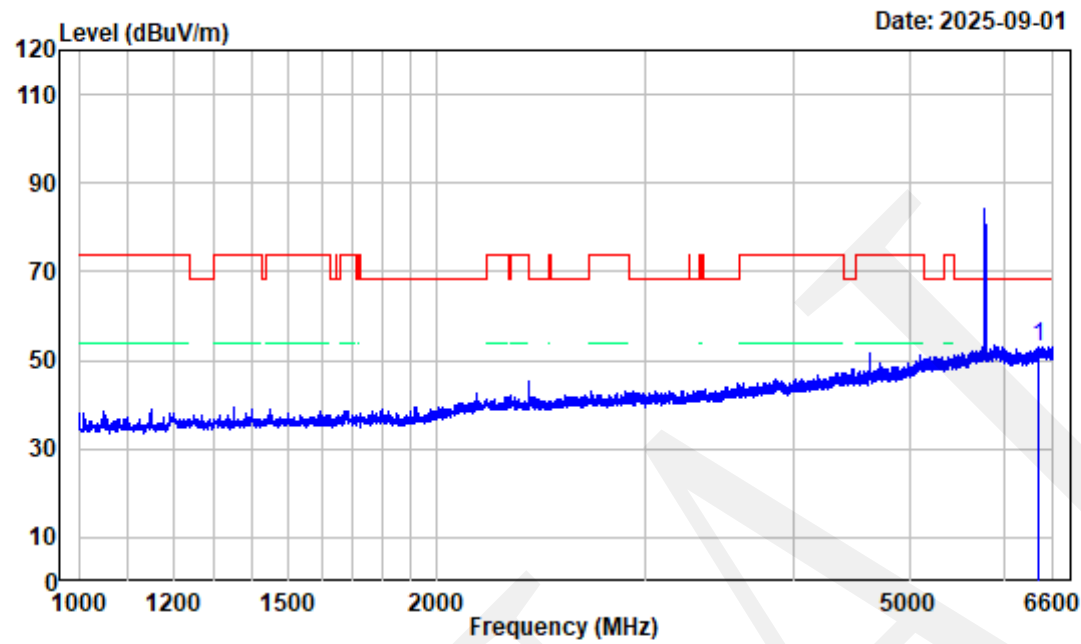

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Note : 802.11AC20 Middle Channel 5785MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Tester:Kevin Lv

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6424.300	-3.56	56.69	53.13	68.20	-15.07	peak

802.11AC20 Middle Channel 1GHz-6.6GHz_VERTICAL

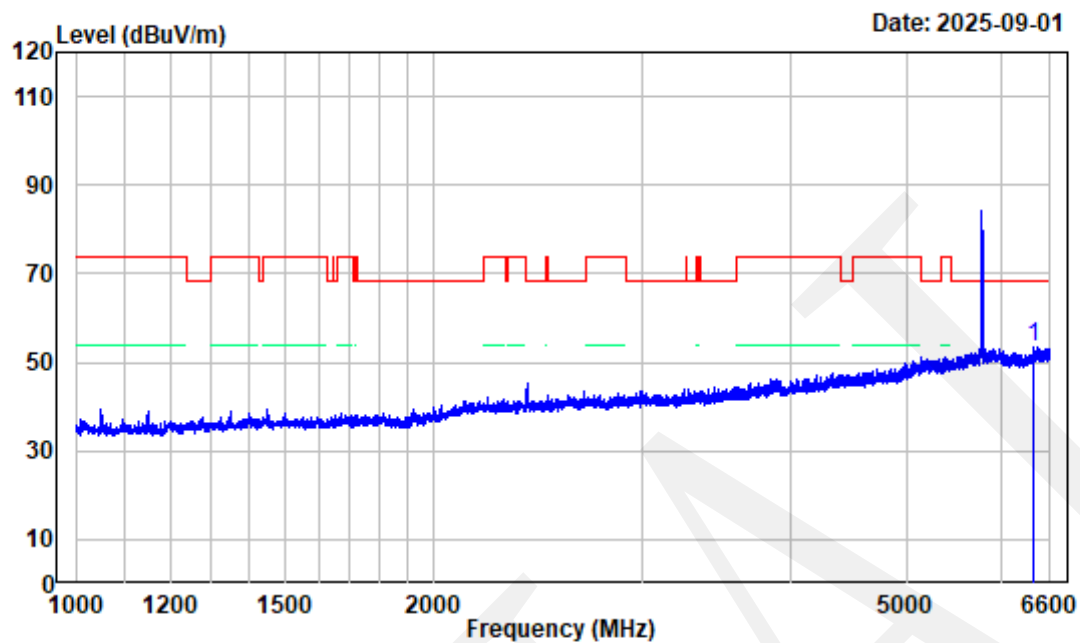


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting
Note : 802.11AC20 Middle Channel 5785MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Tester:Kevin Lv

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6384.400	-3.93	57.51	53.58	68.20	-14.62 peak

802.11AC20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

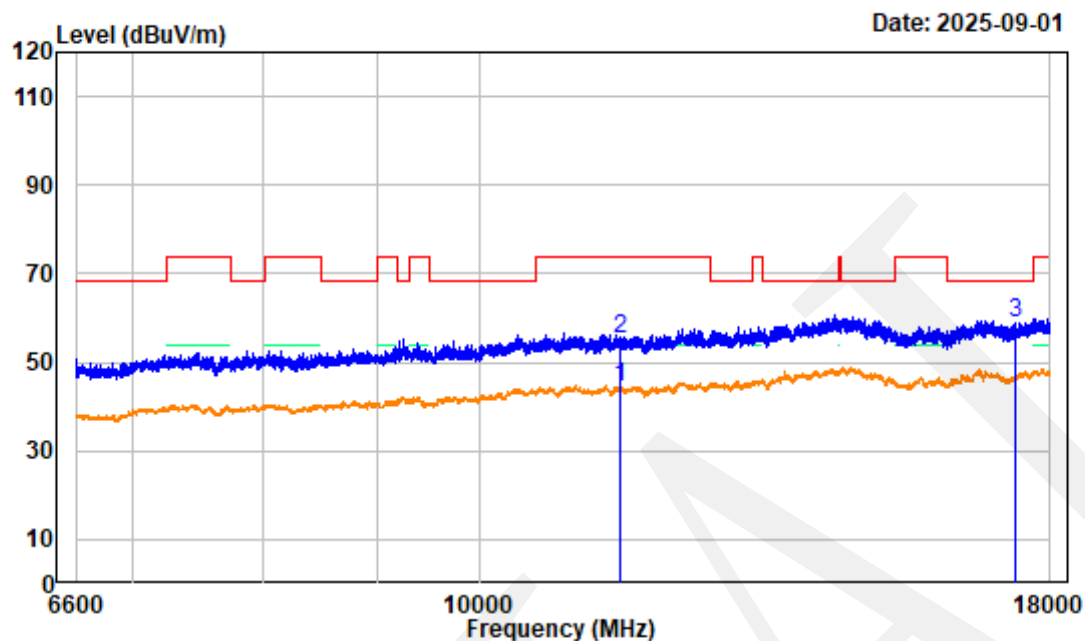

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Middle Channel 5785MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	6.02	38.24	44.26	54.00	-9.74	Average
2	11570.000	6.02	49.28	55.30	74.00	-18.70	peak
3	17355.000	6.60	52.20	58.80	68.20	-9.40	peak

802.11AC20 Middle Channel 6.6GHz-18GHz_VERTICAL

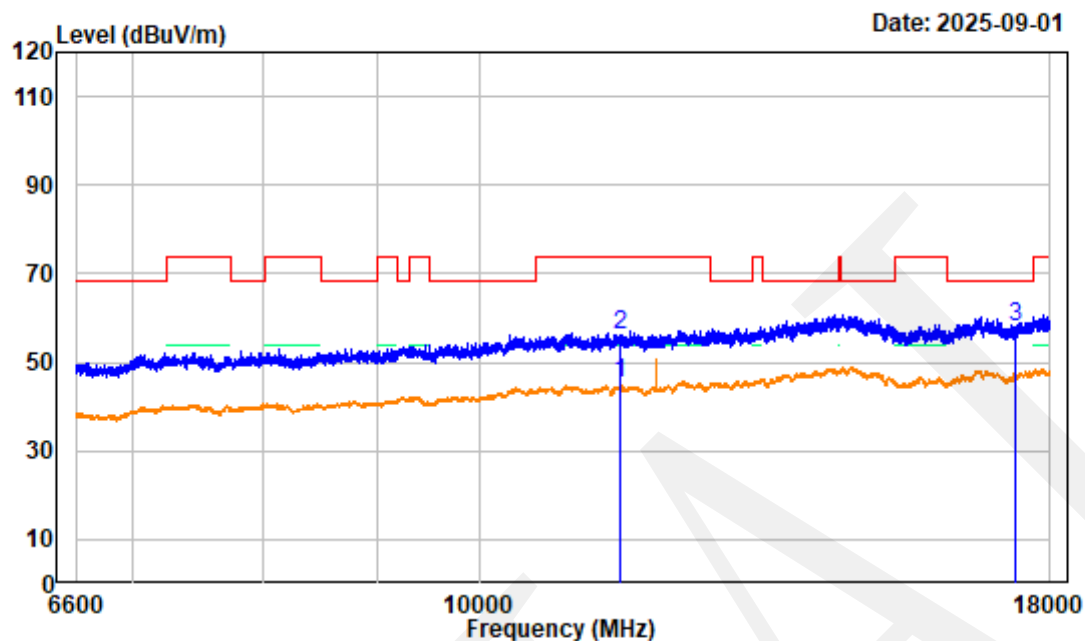

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Middle Channel 5785MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	6.02	39.15	45.17	54.00	-8.83	Average
2	11570.000	6.02	50.14	56.16	74.00	-17.84	peak
3	17355.000	6.60	51.42	58.02	68.20	-10.18	peak


802.11AC20 High Channel 1GHz-6.6GHz_HORIZONTAL

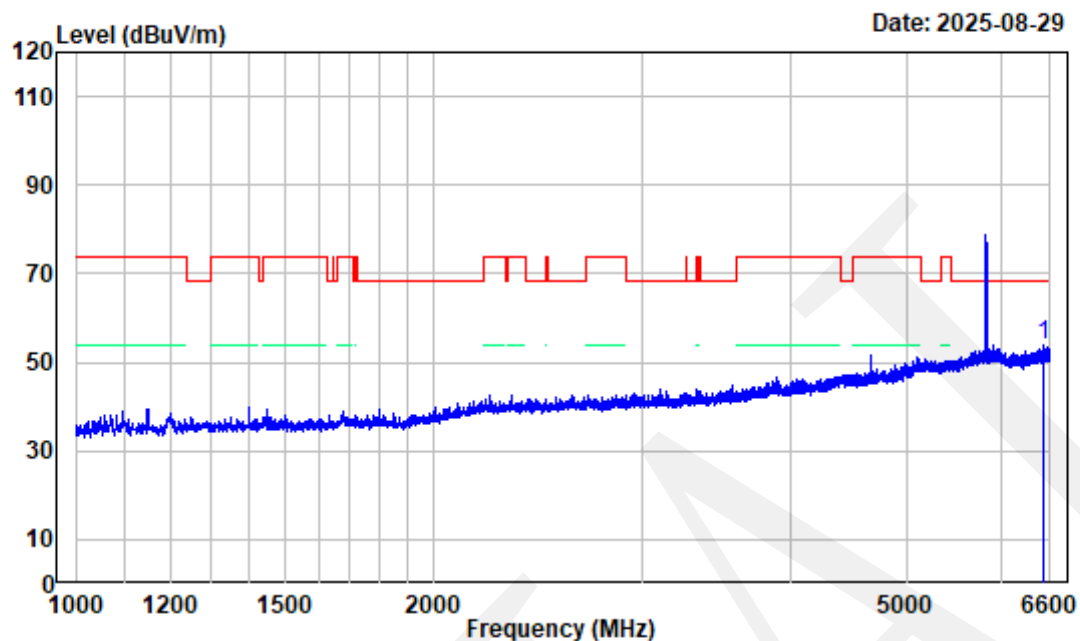

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5825MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6524.400	-3.75	57.46	53.71	68.20	-14.49 peak


802.11AC20 High Channel 1GHz-6.6GHz_VERTICAL

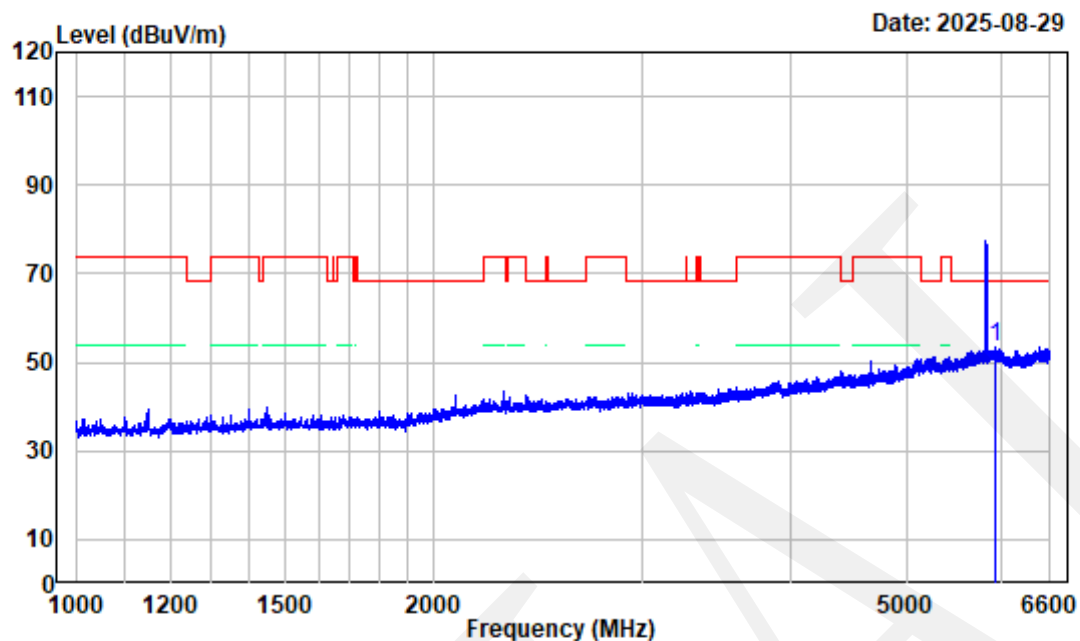

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5825MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5929.400	-4.33	57.89	53.56	68.20	-14.64	peak

802.11AC20 High Channel 6.6GHz-18GHz_HORIZONTAL

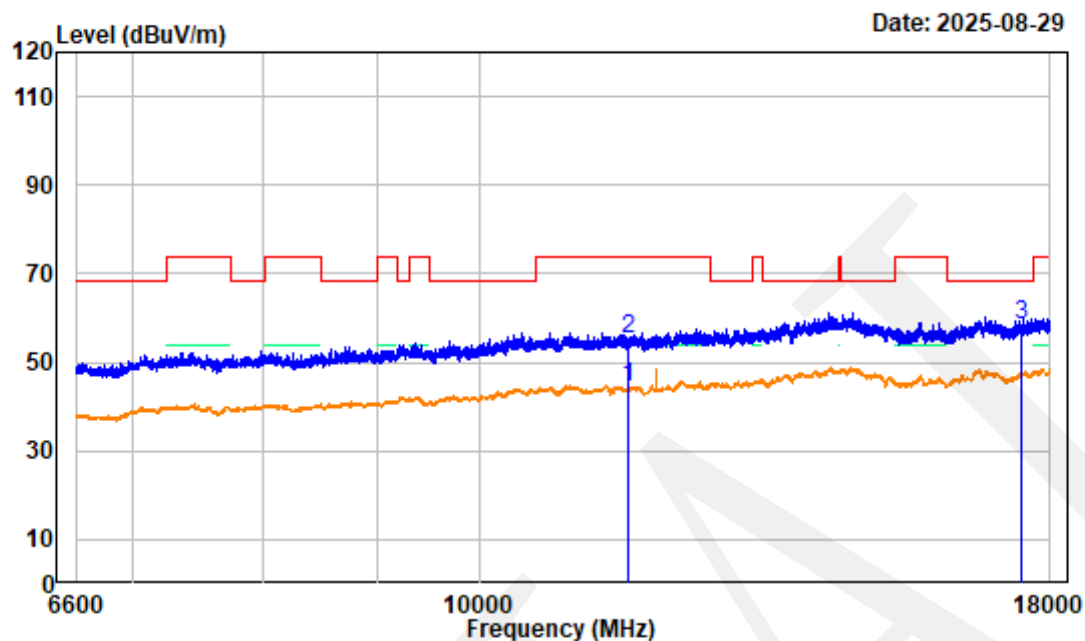

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5825MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.36	38.82	44.18	54.00	-9.82	Average
2	11650.000	5.36	49.78	55.14	74.00	-18.86	peak
3	17475.000	7.21	51.41	58.62	68.20	-9.58	peak

802.11AC20 High Channel 6.6GHz-18GHz_VERTICAL

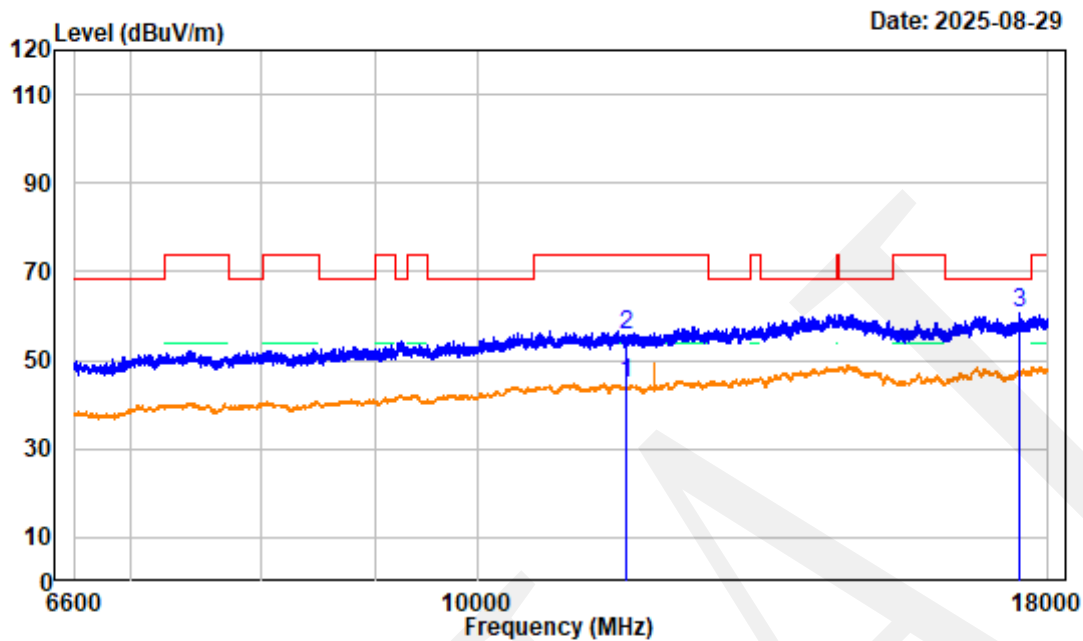


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting
Note : 802.11AC20 High Channel 5825MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Tester:Kevin Lv

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	5.36	39.51	44.87	54.00	-9.13	Average
2 11650.000	5.36	50.46	55.82	74.00	-18.18	peak
3 17475.000	7.21	53.59	60.80	68.20	-7.40	peak

802.11AC20 High Channel Bandedge_HORIZONTAL

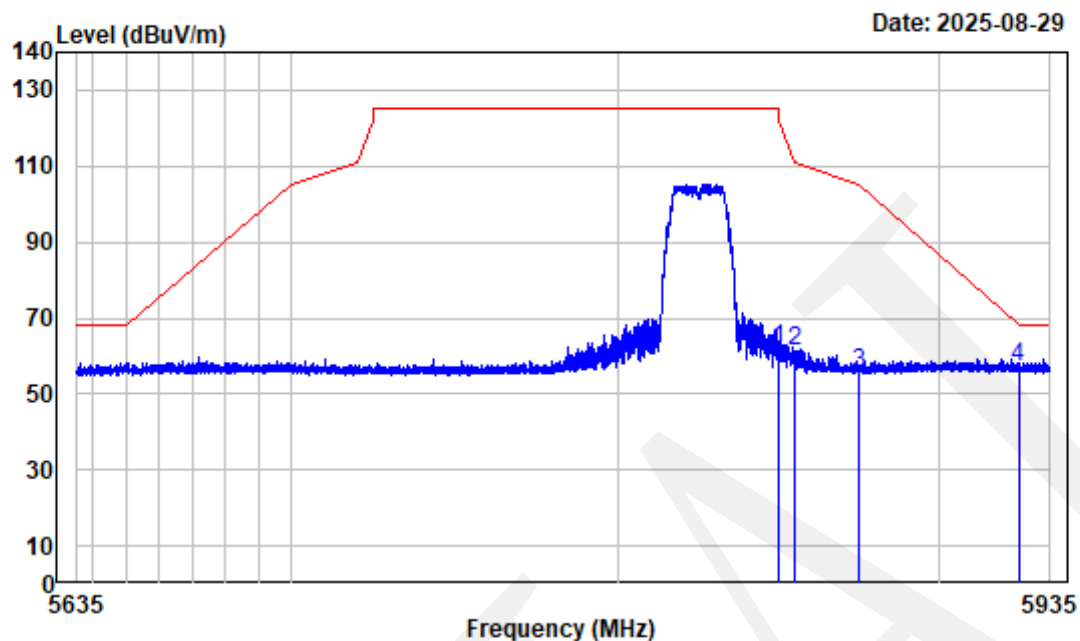

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5825MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	66.61	62.07	122.20	-60.13	peak
2	5855.000	-4.48	65.80	61.32	110.80	-49.48	peak
3	5875.000	-4.20	59.61	55.41	105.20	-49.79	peak
4	5925.000	-4.27	61.24	56.97	68.20	-11.23	peak


802.11AC20 High Channel Bandedge_VERTICAL

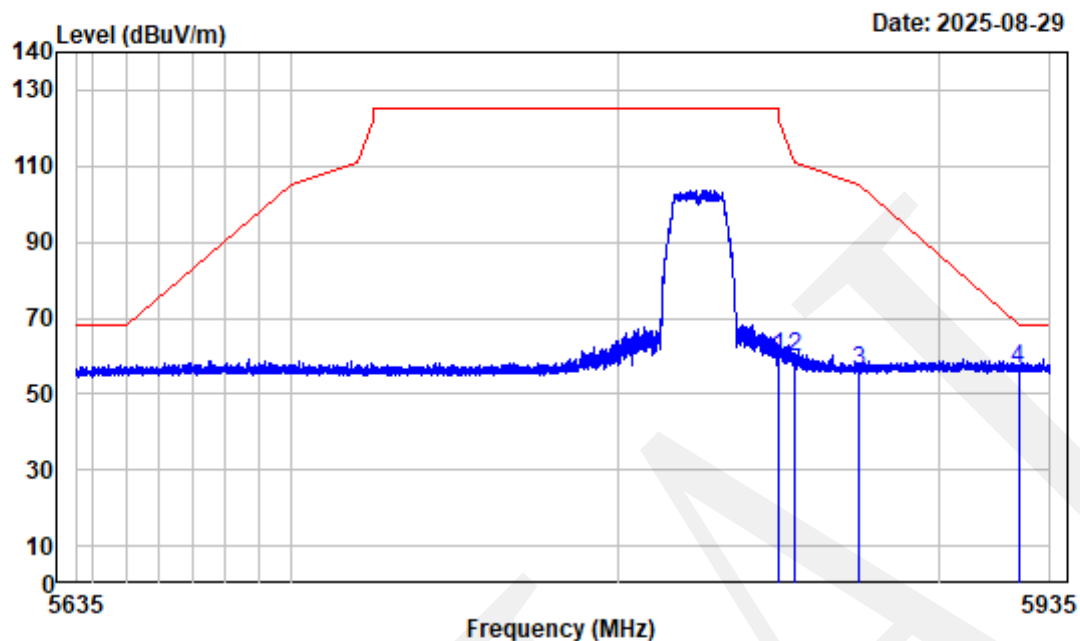

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504U35143E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC20 High Channel 5825MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	64.40	59.86	122.20	-62.34	peak
2	5855.000	-4.48	64.18	59.70	110.80	-51.10	peak
3	5875.000	-4.20	60.24	56.04	105.20	-49.16	peak
4	5925.000	-4.27	60.56	56.29	68.20	-11.91	peak

802.11AC40 Low Channel 1GHz-6.6GHz_HORIZONTAL

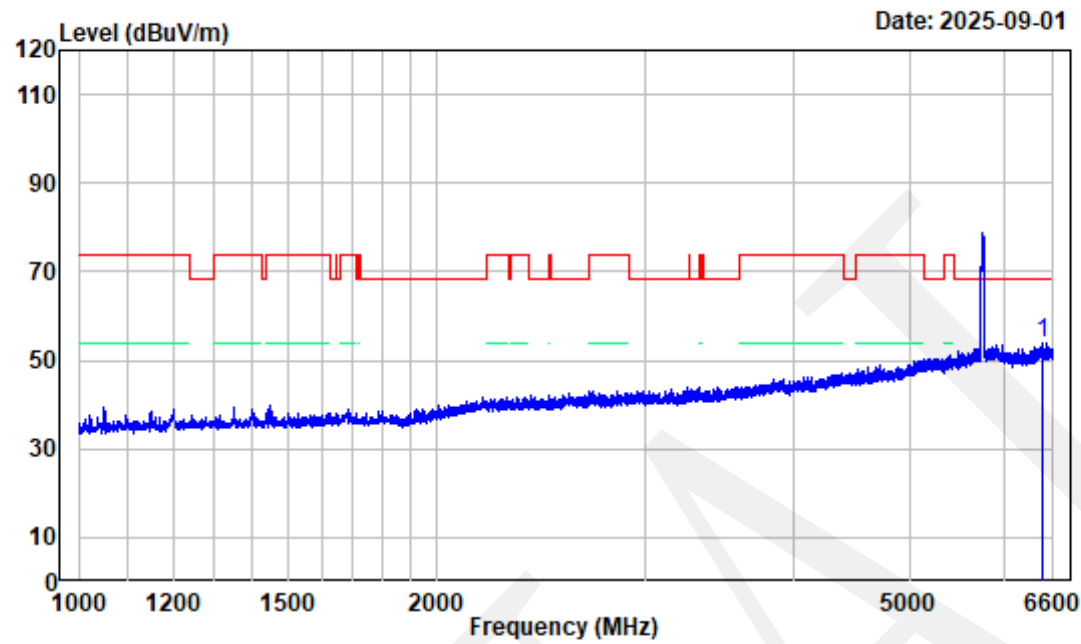

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AC40 Low Channel 5755MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6477.500	-3.67	57.59	53.92	68.20	-14.28 peak


802.11AC40 Low Channel 1GHz-6.6GHz_VERTICAL

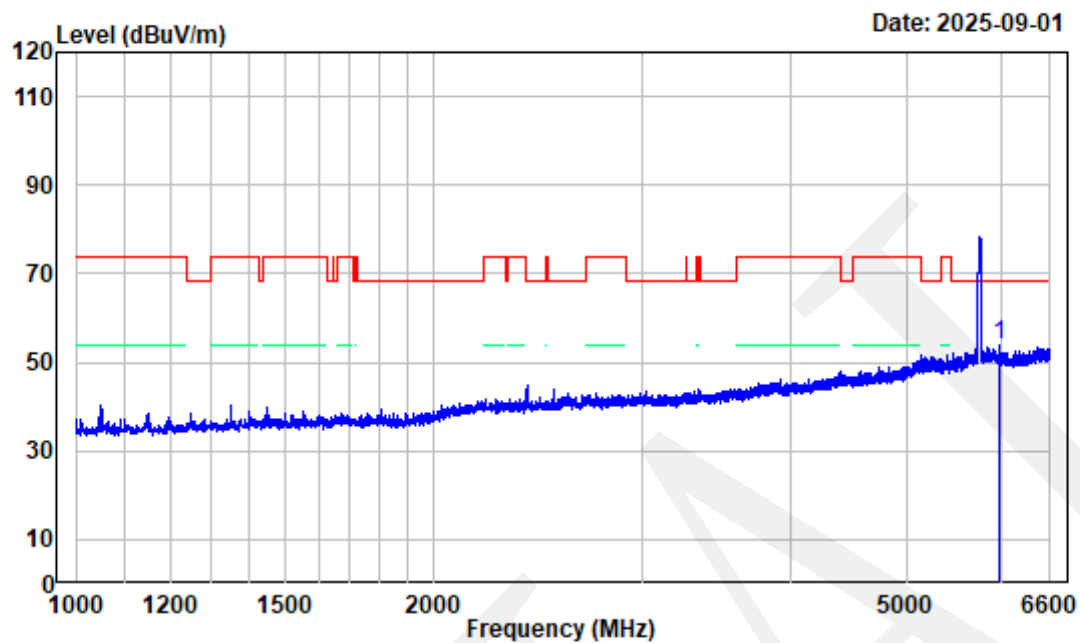

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5755MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5979.100	-4.80	58.51	53.71	68.20	-14.49	peak

802.11AC40 Low Channel 6.6GHz-18GHz_HORIZONTAL

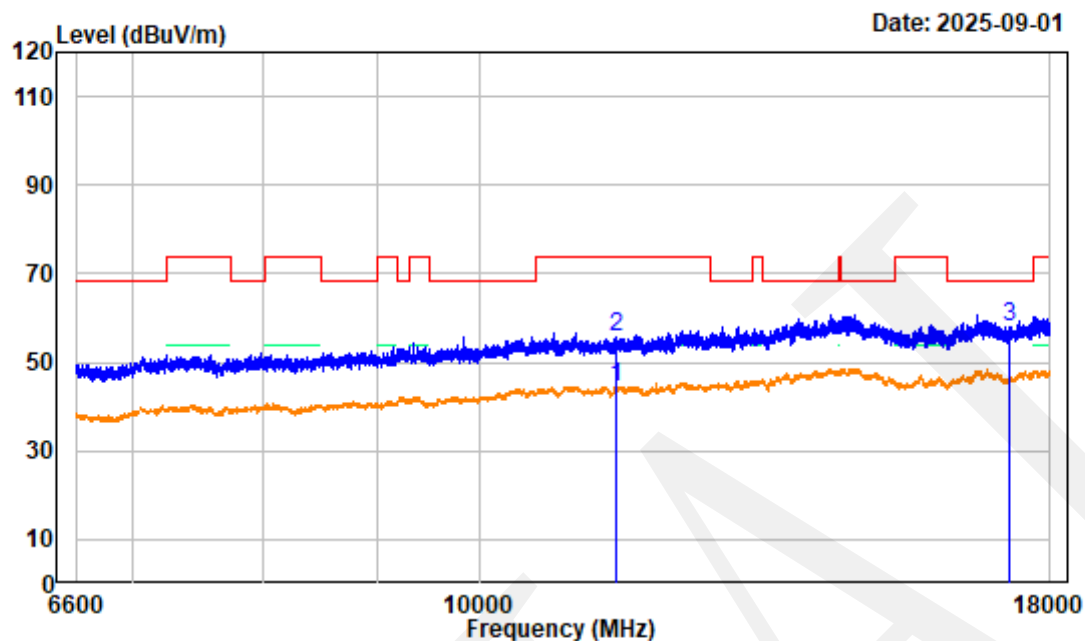

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5755MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	6.44	38.10	44.54	54.00	-9.46	Average
2	11510.000	6.44	49.11	55.55	74.00	-18.45	peak
3	17265.000	6.75	51.30	58.05	68.20	-10.15	peak

802.11AC40 Low Channel 6.6GHz-18GHz_VERTICAL

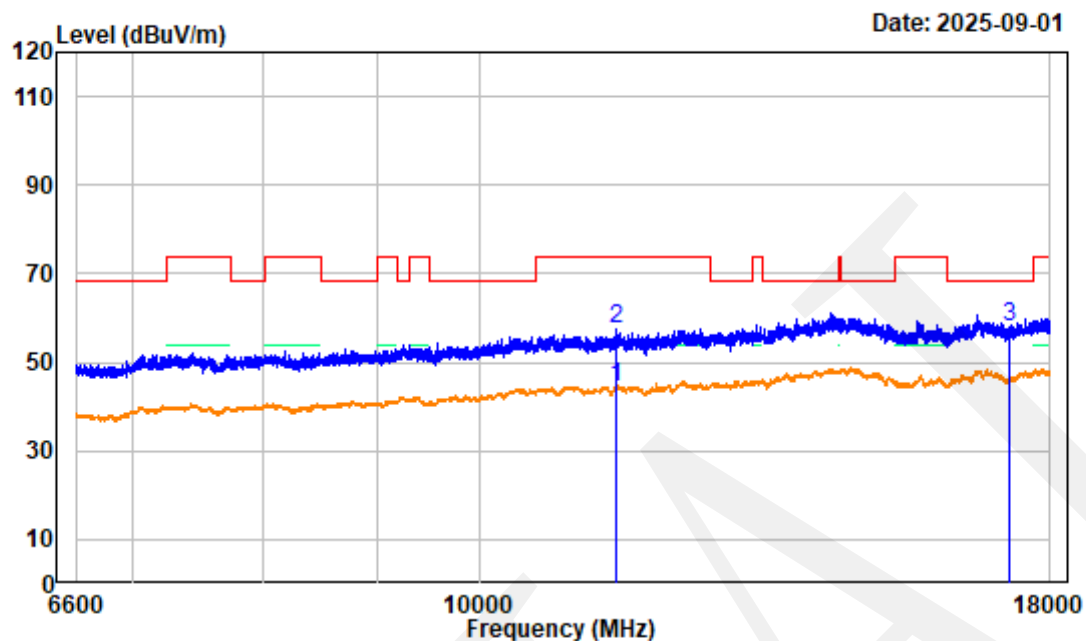

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5755MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	6.44	37.93	44.37	54.00	-9.63 Average
2	11510.000	6.44	50.91	57.35	74.00	-16.65 peak
3	17265.000	6.75	51.04	57.79	68.20	-10.41 peak


802.11AC40 Low Channel Bandedge

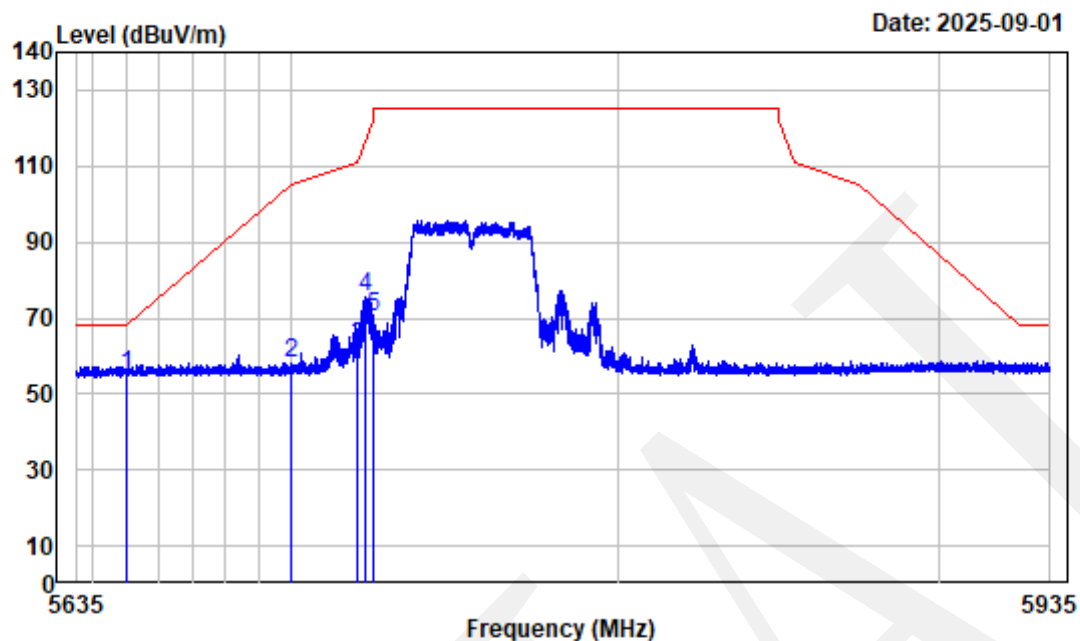

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504U35143E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC40 Low Channel 5755MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	59.55	54.83	68.20	-13.37	peak
2	5700.000	-4.35	62.37	58.02	105.20	-47.18	peak
3	5720.000	-4.43	66.63	62.20	110.80	-48.60	peak
4	5722.563	-4.44	79.98	75.54	116.64	-41.10	Peak
5	5725.000	-4.45	74.52	70.07	122.20	-52.13	peak

802.11AC40 Low Channel Bandedge_HORIZONTAL

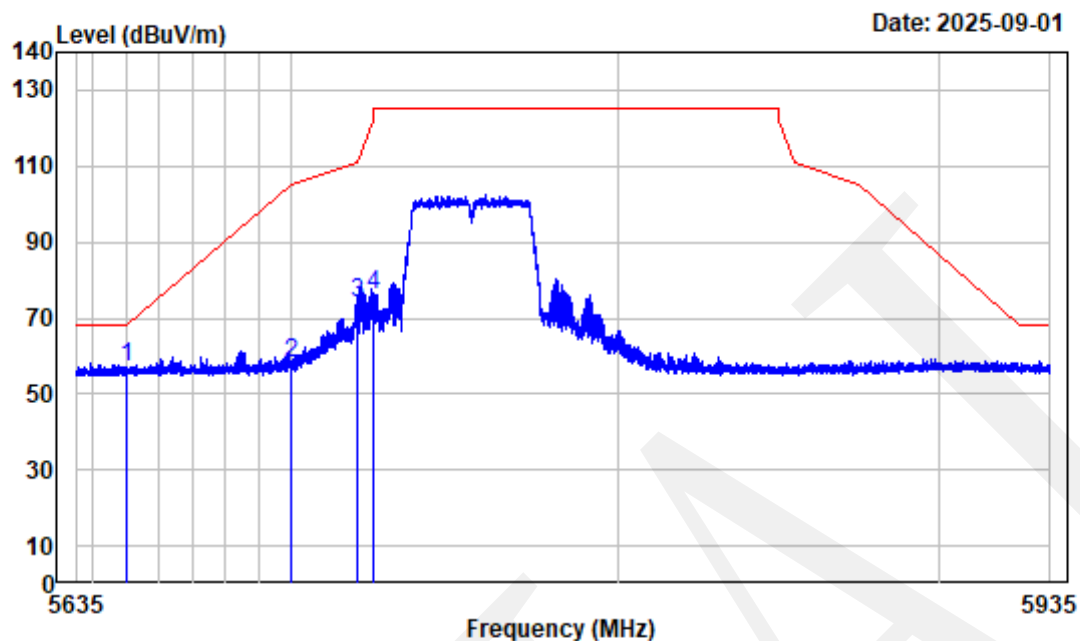

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5755MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	62.01	57.29	68.20	-10.91	peak
2	5700.000	-4.35	62.63	58.28	105.20	-46.92	peak
3	5720.000	-4.43	78.39	73.96	110.80	-36.84	peak
4	5725.000	-4.45	80.46	76.01	122.20	-46.19	peak

802.11AC40 High Channel 1GHz-6.6GHz_HORIZONTAL

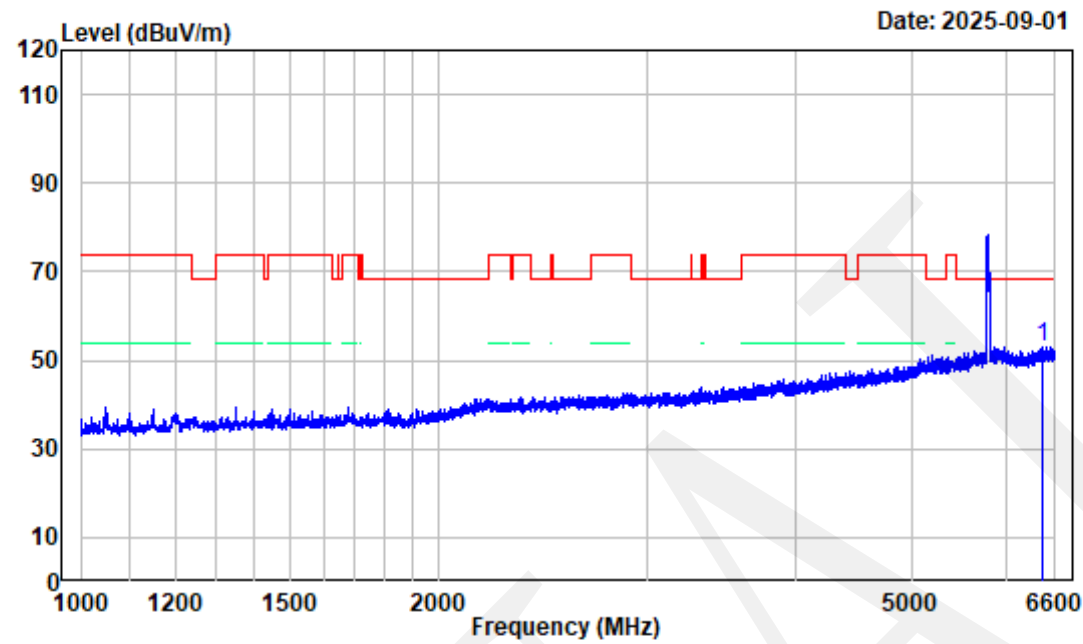

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AC40 High Channel 5795MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6440.400	-3.50	56.55	53.05	68.20	-15.15	peak


802.11AC40 High Channel 1GHz-6.6GHz_VERTICAL

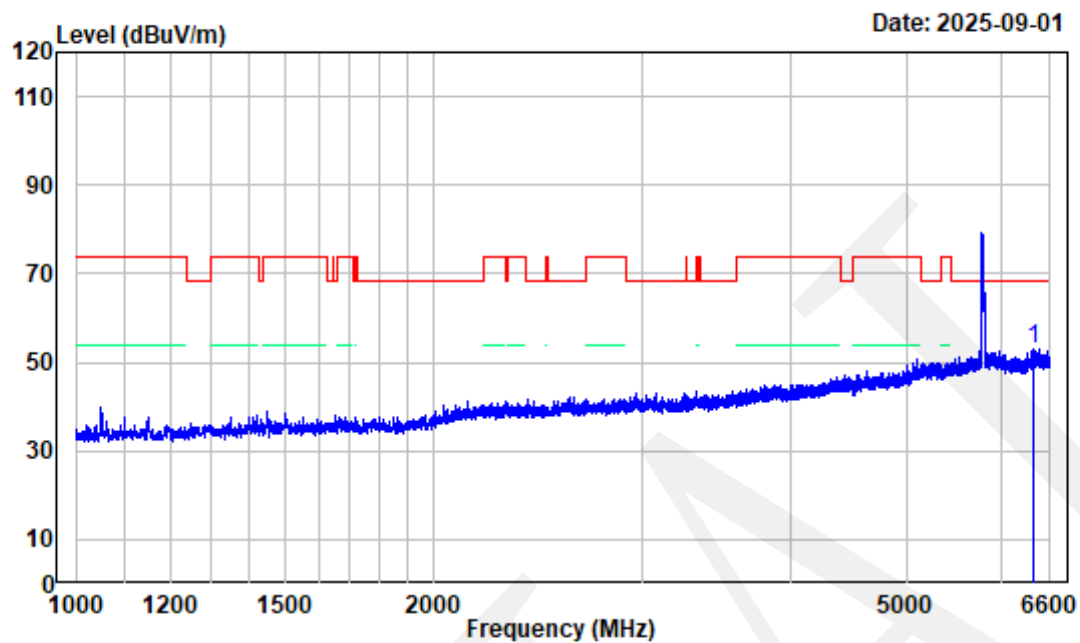

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5795MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6395.600	-3.74	56.66	52.92	68.20	-15.28 peak

802.11AC40 High Channel 6.6GHz-18GHz_HORIZONTAL

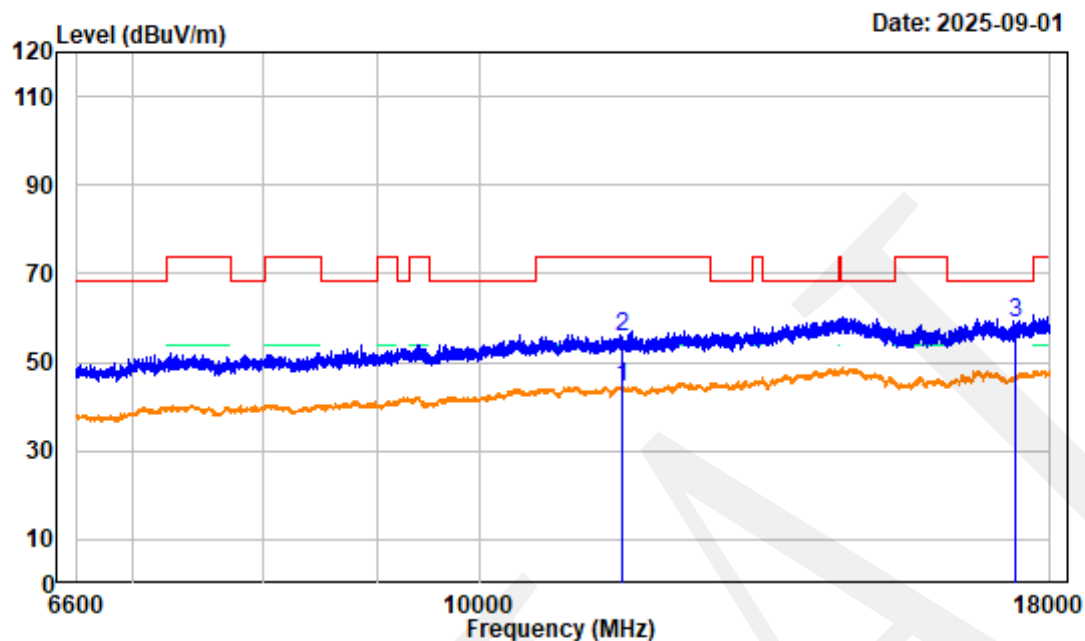

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5795MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	5.82	38.74	44.56	54.00	-9.44	Average
2	11590.000	5.82	49.72	55.54	74.00	-18.46	peak
3	17385.000	6.77	51.99	58.76	68.20	-9.44	peak

802.11AC40 High Channel 6.6GHz-18GHz_VERTICAL

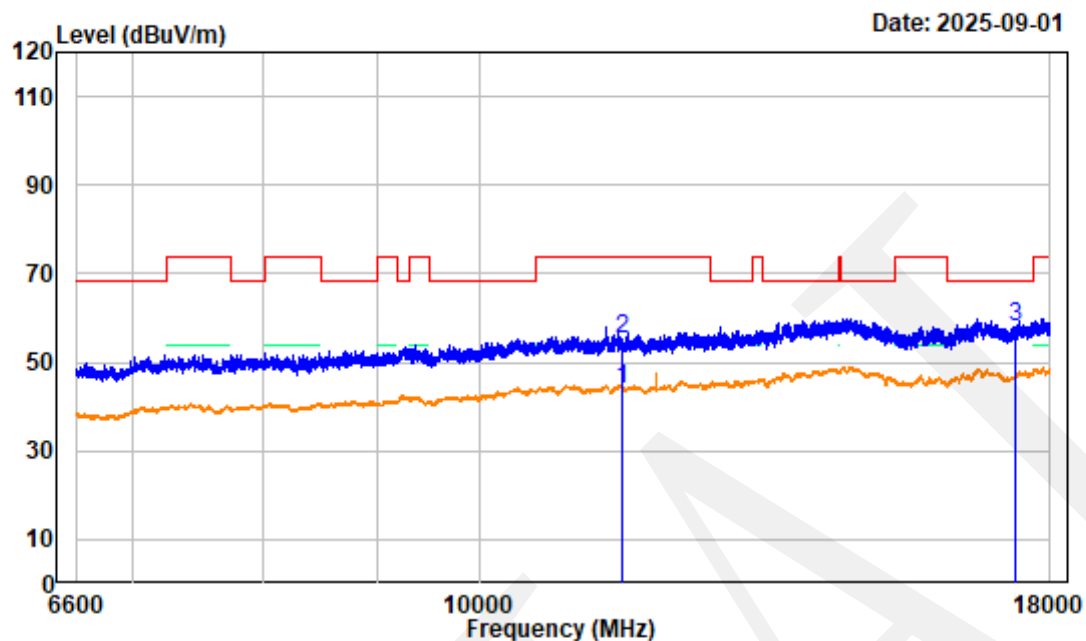

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5795MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	5.82	38.27	44.09	54.00	-9.91	Average
2	11590.000	5.82	49.23	55.05	74.00	-18.95	peak
3	17385.000	6.77	51.15	57.92	68.20	-10.28	peak


802.11AC40 High Channel Bandedge_HORIZONTAL

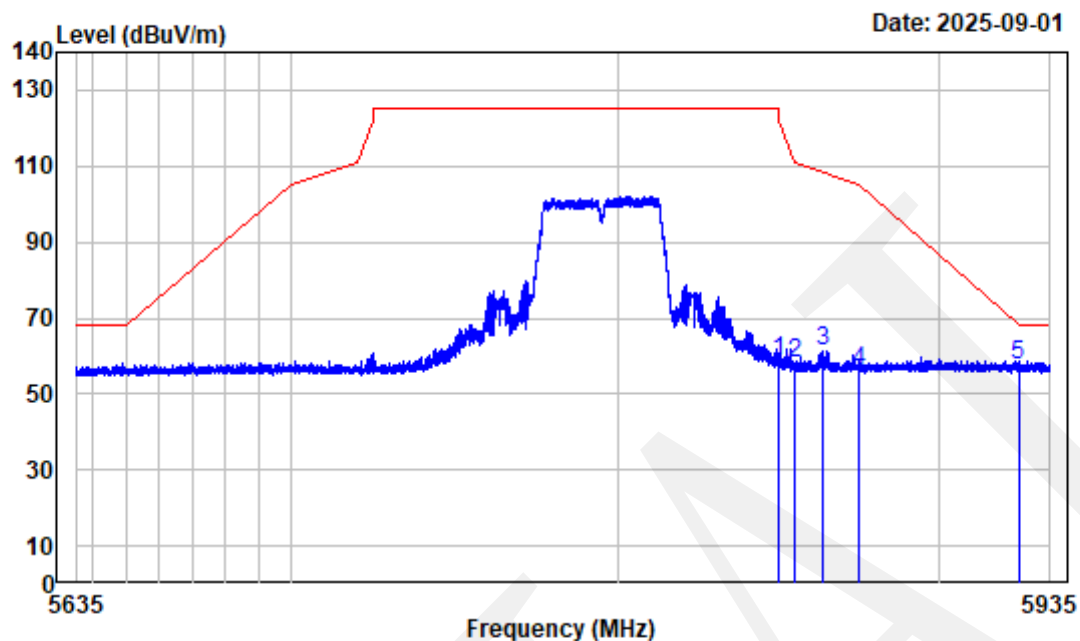

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504U35143E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC40 High Channel 5795MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	62.94	58.40	122.20	-63.80	peak
2	5855.000	-4.48	62.45	57.97	110.80	-52.83	peak
3	5863.825	-4.36	65.56	61.20	108.33	-47.13	Peak
4	5875.000	-4.20	60.29	56.09	105.20	-49.11	peak
5	5925.000	-4.27	61.59	57.32	68.20	-10.88	peak


802.11AC40 High Channel Bandedge_VERTICAL

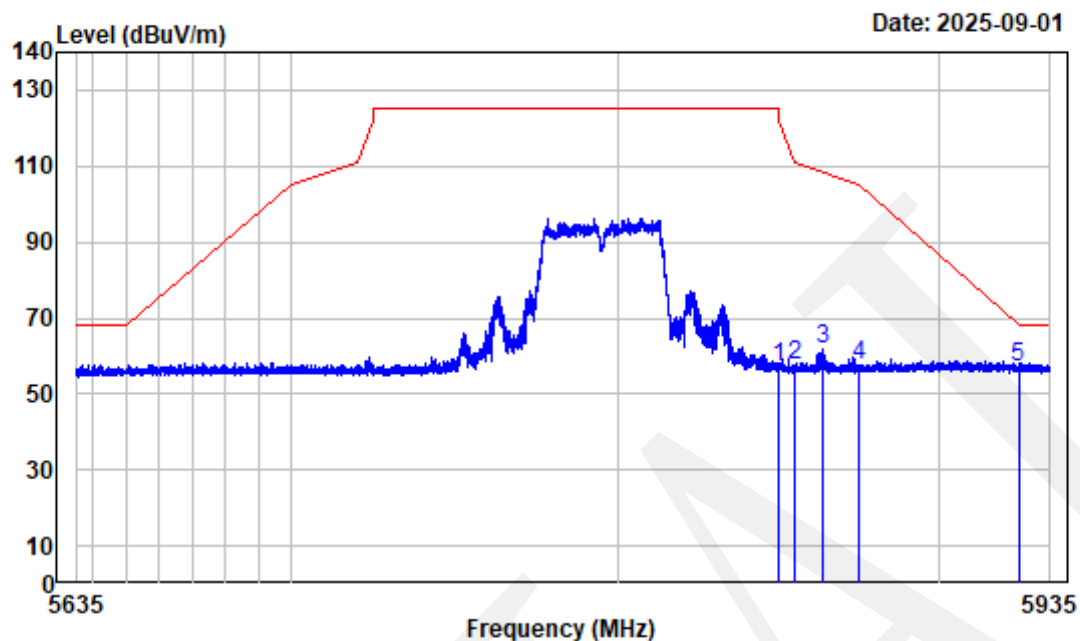

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504U35143E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC40 High Channel 5795MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	61.41	56.87	122.20	-65.33	peak
2	5855.000	-4.48	61.86	57.38	110.80	-53.42	peak
3	5863.337	-4.36	66.26	61.90	108.46	-46.56	Peak
4	5875.000	-4.20	61.54	57.34	105.20	-47.86	peak
5	5925.000	-4.27	61.32	57.05	68.20	-11.15	peak

802.11AC80 Channel 1GHz-6.6GHz_HORIZONTAL

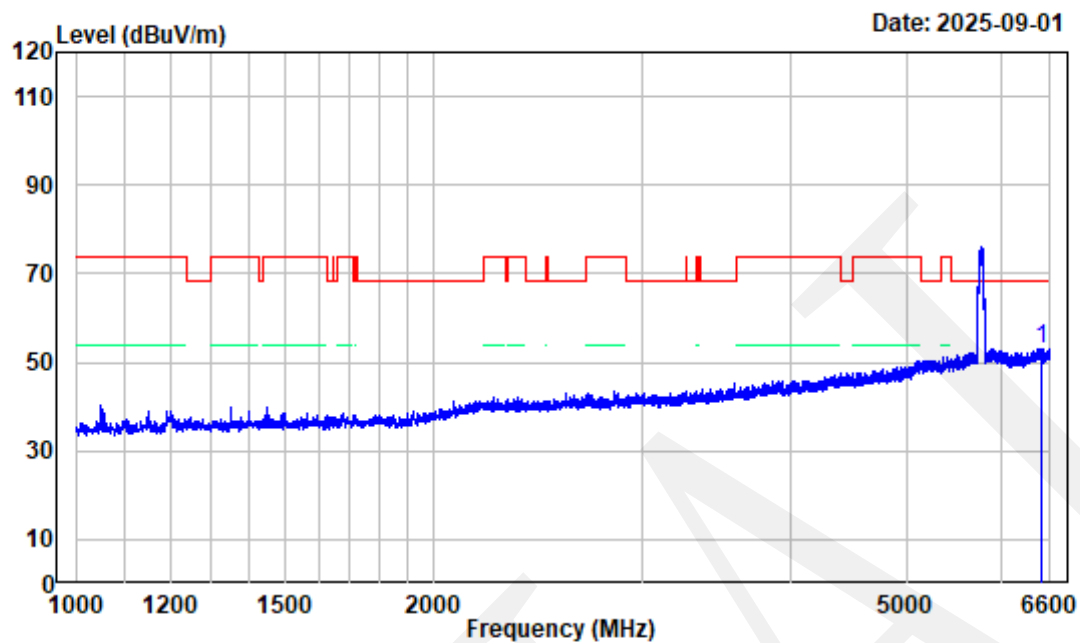

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC80 Channel 5775MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6499.200	-3.85	56.89	53.04	68.20	-15.16 peak


802.11AC80 Channel 1GHz-6.6GHz_VERTICAL

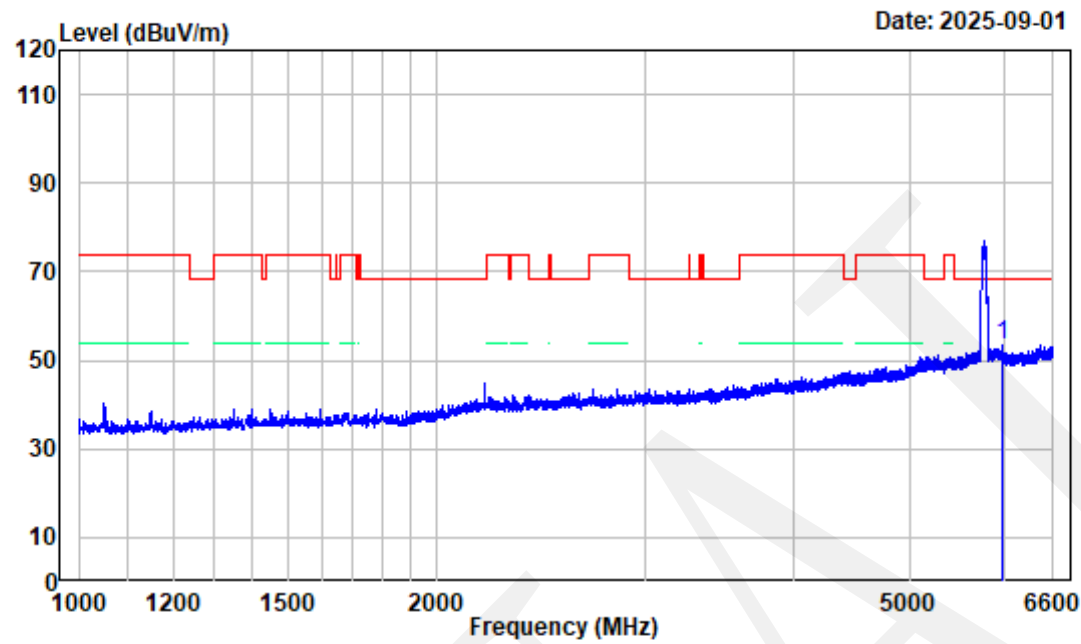

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC80 Channel 5775MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5979.100	-4.80	58.19	53.39	68.20	-14.81 peak

802.11AC80 Channel 6.6GHz-18GHz_HORIZONTAL

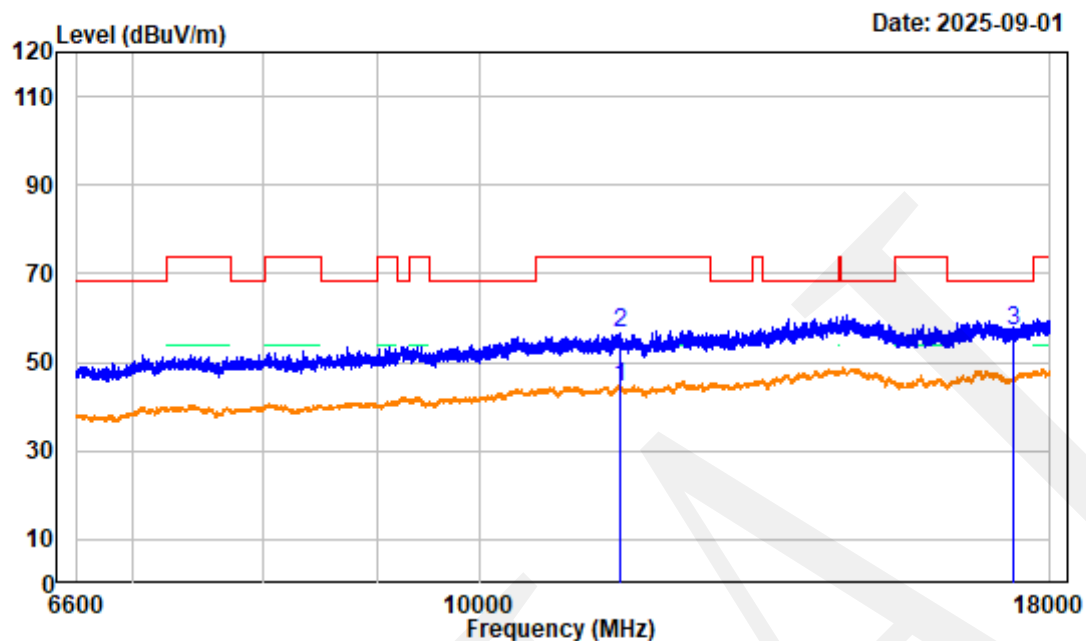

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC80 Channel 5775MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	6.21	38.36	44.57	54.00	-9.43	average
2	11550.000	6.21	50.32	56.53	74.00	-17.47	peak
3	17325.000	6.59	50.60	57.19	68.20	-11.01	peak


802.11AC80 Channel 6.6GHz-18GHz_VERTICAL

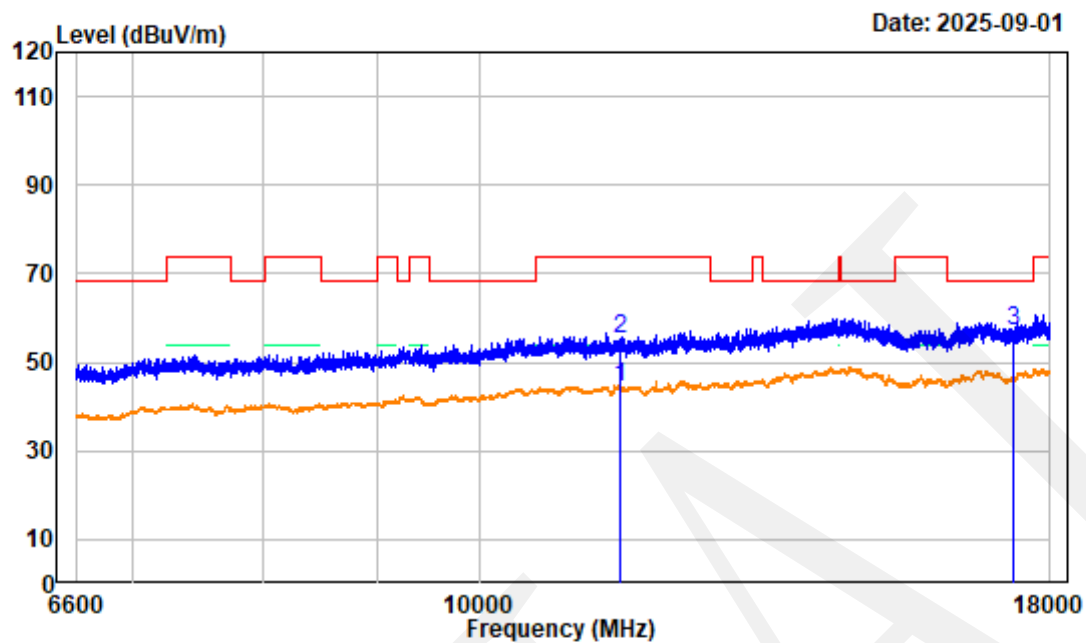

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC80 Channel 5775MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	6.21	37.97	44.18	54.00	-9.82 average
2	11550.000	6.21	48.92	55.13	74.00	-18.87 peak
3	17325.000	6.59	50.40	56.99	68.20	-11.21 peak

802.11AC80 Channel Bandedge_HORIZONTAL

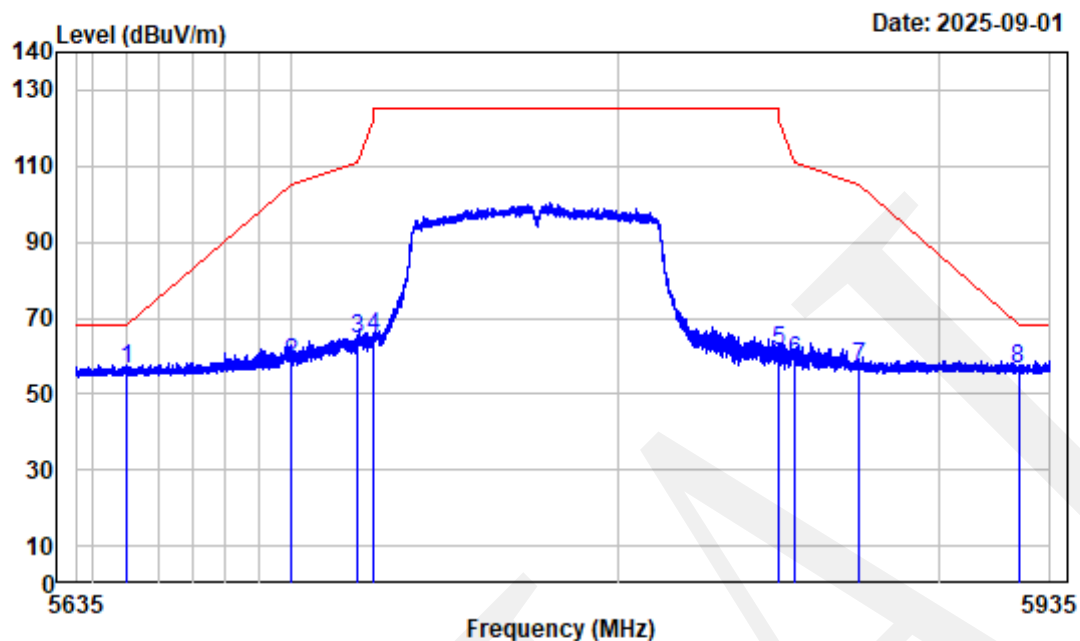

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC80 Channel 5775MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	61.26	56.54	68.20	-11.66	peak
2	5700.000	-4.35	62.53	58.18	105.20	-47.02	peak
3	5720.000	-4.43	68.74	64.31	110.80	-46.49	peak
4	5725.000	-4.45	69.48	65.03	122.20	-57.17	peak
5	5850.000	-4.54	65.85	61.31	122.20	-60.89	peak
6	5855.000	-4.48	63.08	58.60	110.80	-52.20	peak
7	5875.000	-4.20	61.41	57.21	105.20	-47.99	peak
8	5925.000	-4.27	60.71	56.44	68.20	-11.76	peak

802.11AC80 Channel Bandedge_VERTICAL

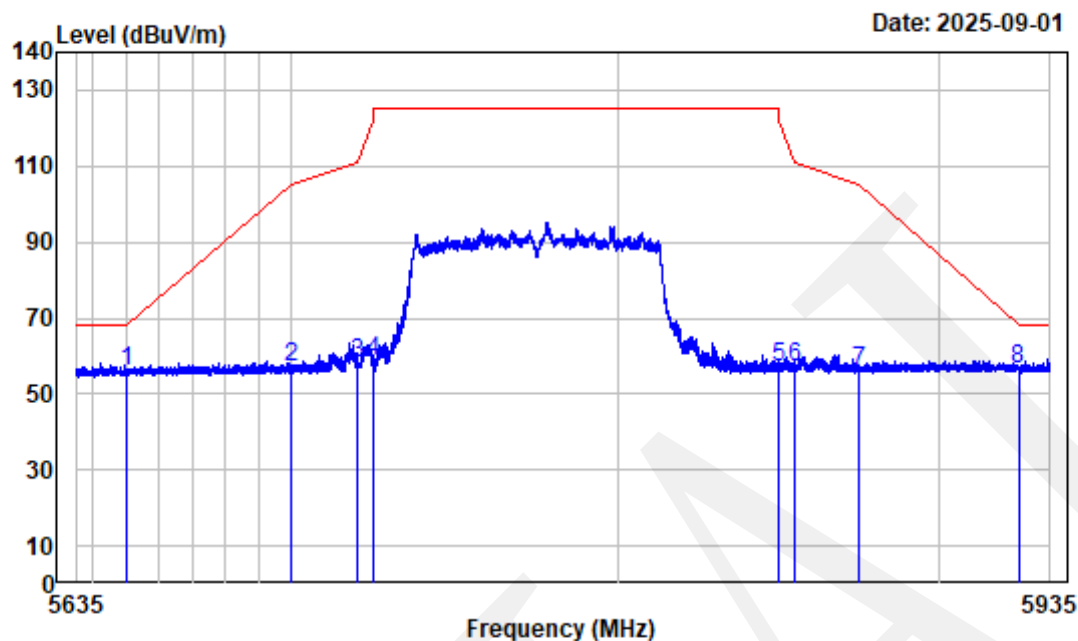

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC80 Channel 5775MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	60.68	55.96	68.20	-12.24	peak
2	5700.000	-4.35	61.46	57.11	105.20	-48.09	peak
3	5720.000	-4.43	62.69	58.26	110.80	-52.54	peak
4	5725.000	-4.45	62.85	58.40	122.20	-63.80	peak
5	5850.000	-4.54	61.39	56.85	122.20	-65.35	peak
6	5855.000	-4.48	61.43	56.95	110.80	-53.85	peak
7	5875.000	-4.20	60.11	55.91	105.20	-49.29	peak
8	5925.000	-4.27	60.98	56.71	68.20	-11.49	peak

802.11AX20 Low Channel 1GHz-6.6GHz_HORIZONTAL

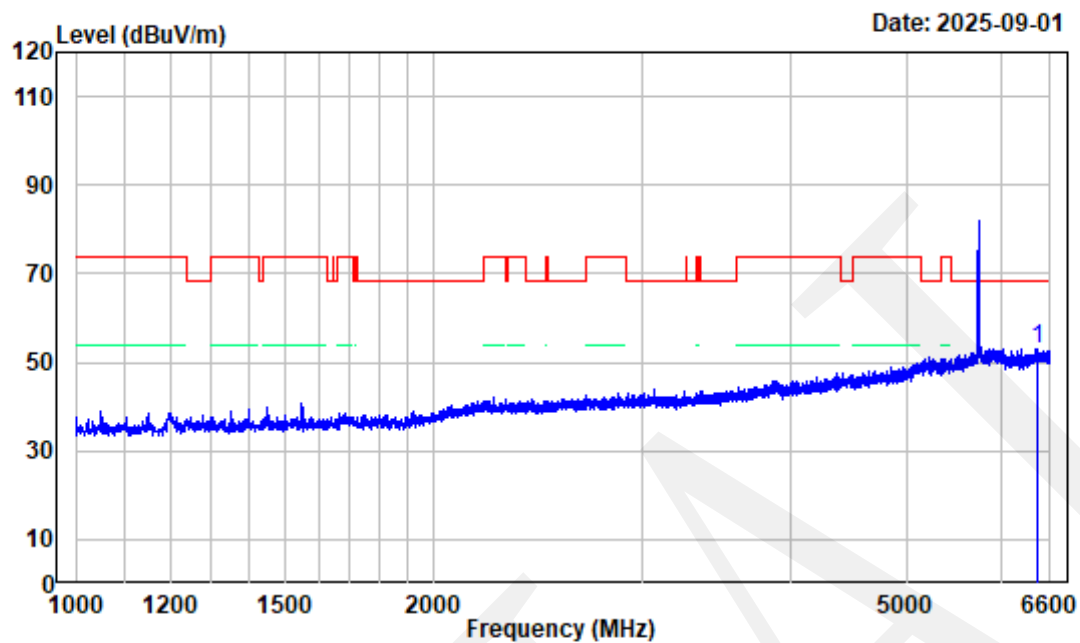

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5745MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6432.700	-3.53	56.61	53.08	68.20	-15.12 peak


802.11AX20 Low Channel 1GHz-6.6GHz_VERTICAL

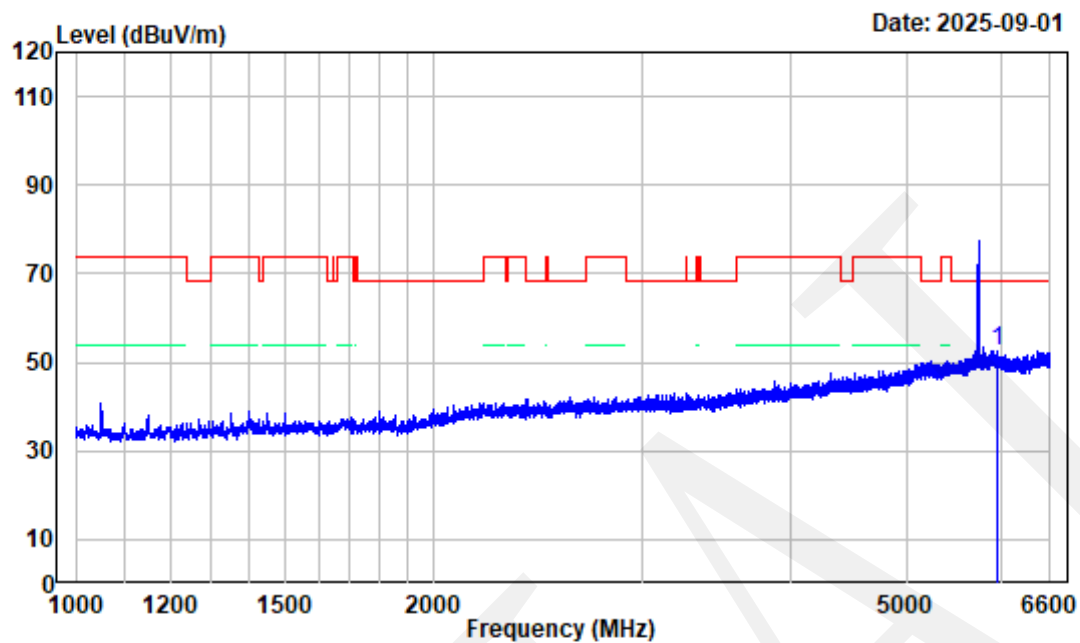

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5745MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5950.400	-4.66	57.36	52.70	68.20	-15.50	peak

802.11AX20 Low Channel 6.6GHz-18GHz_HORIZONTAL

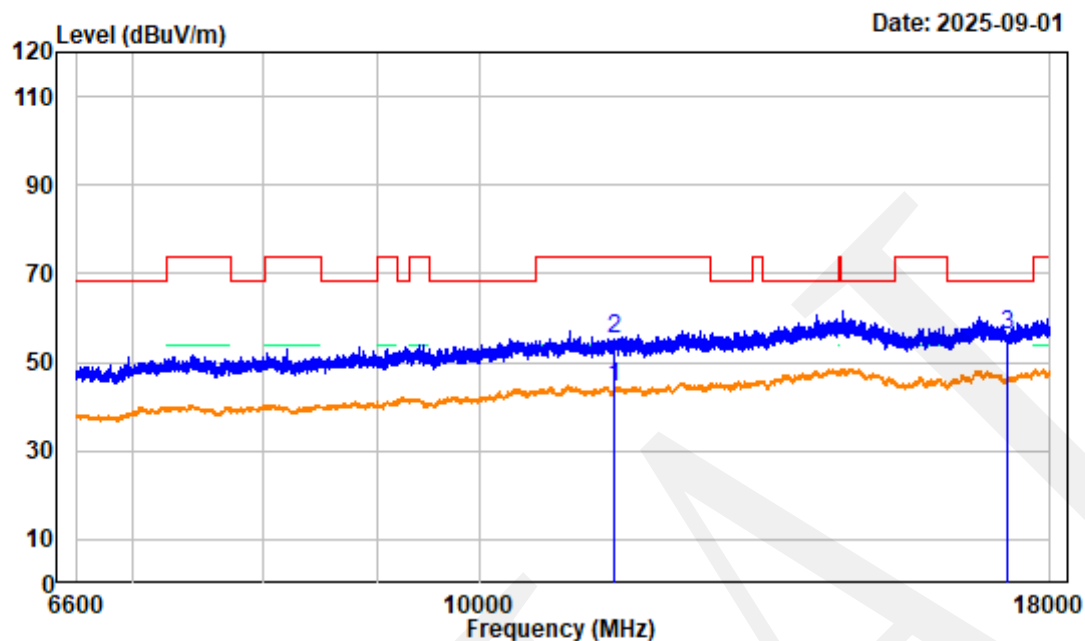

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5745MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.24	37.92	44.16	54.00	-9.84	Average
2	11490.000	6.24	48.89	55.13	74.00	-18.87	peak
3	17235.000	6.82	49.30	56.12	68.20	-12.08	peak

802.11AX20 Low Channel 6.6GHz-18GHz_VERTICAL

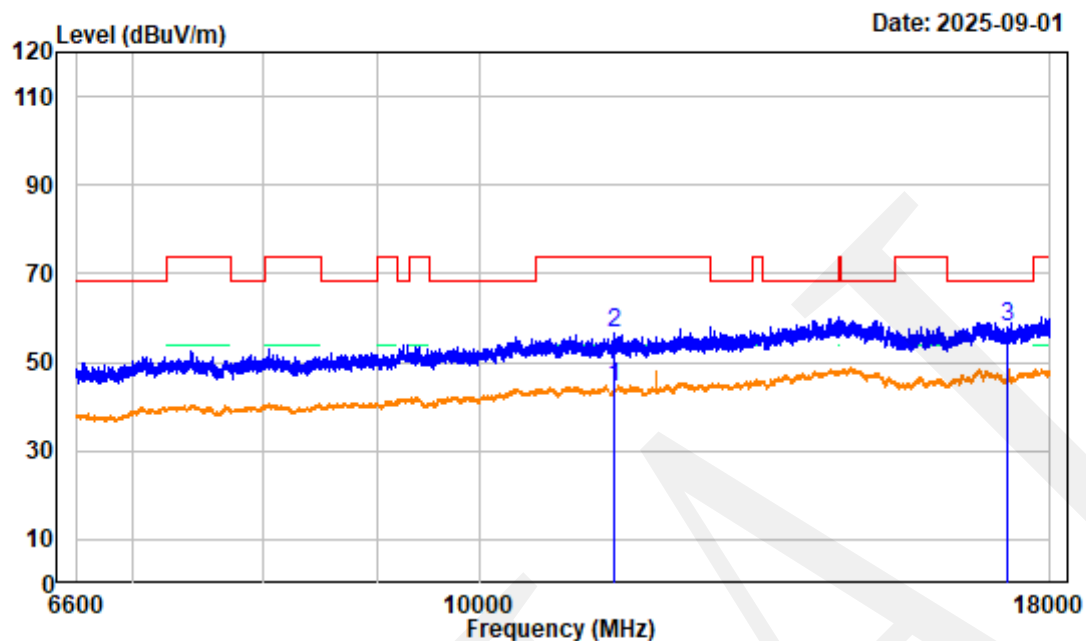

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5745MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.24	38.15	44.39	54.00	-9.61	Average
2	11490.000	6.24	50.15	56.39	74.00	-17.61	peak
3	17235.000	6.82	51.15	57.97	68.20	-10.23	peak

802.11AX20 Low Channel 18GHz-26.5GHz_HORIZONTAL

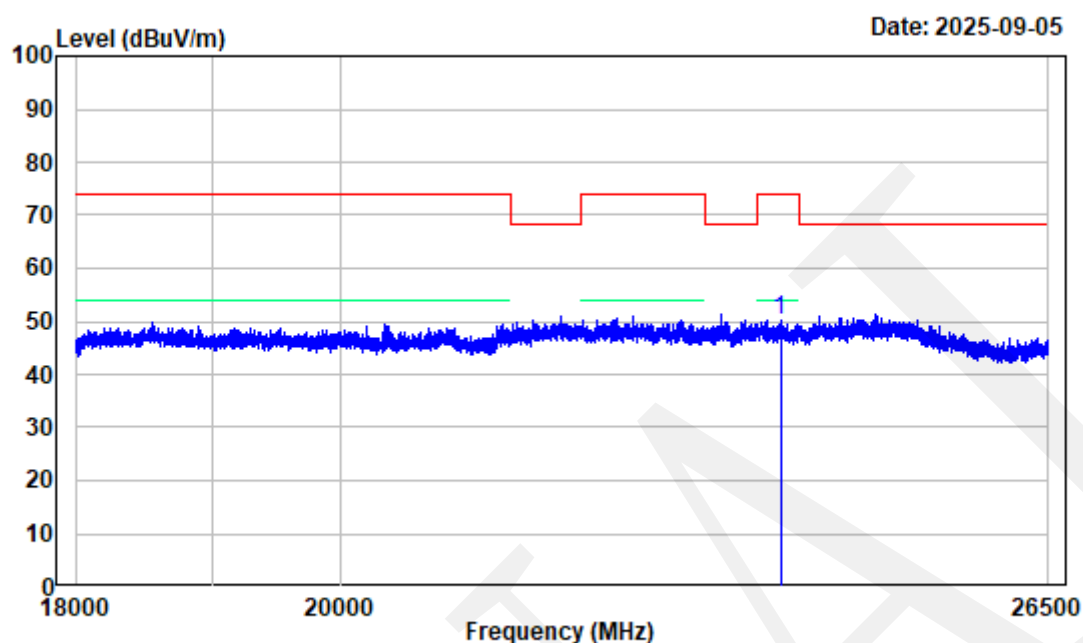

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5745MHz 18-26.5GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 23821.440	1.47	48.81	50.28	74.00	-23.72	Peak

802.11AX20 Low Channel 18GHz-26.5GHz_ VERTICAL

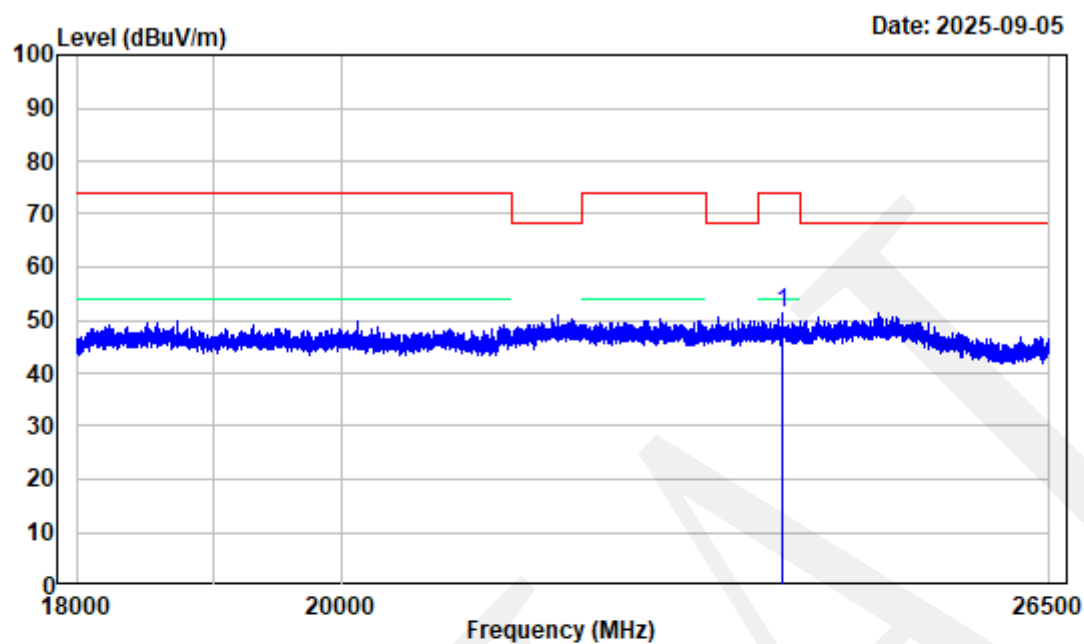

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5745MHz 18-26.5GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 23824.630	1.48	49.80	51.28	74.00	-22.72	Peak


802.11AX20 Low Channel 26.5GHz-40GHz_HORIZONTAL

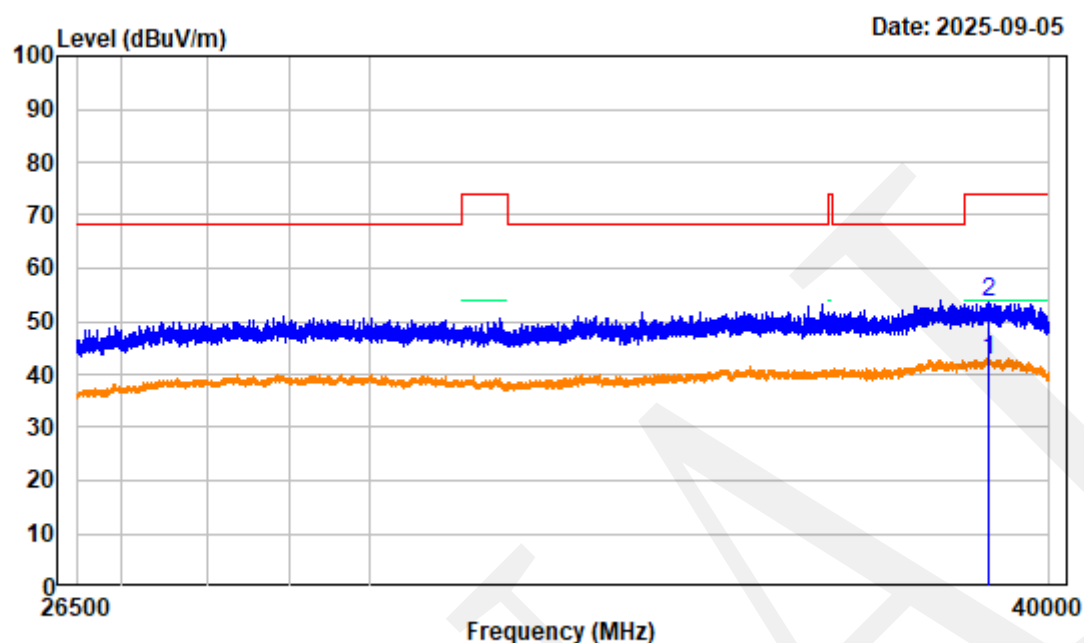

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504U35143E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX20 Low Channel 5745MHz 26.5-40GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 38992.560	3.67	38.83	42.50	54.00	-11.50	Average
2 38992.560	3.67	49.80	53.47	74.00	-20.53	Peak


802.11AX20 Low Channel 26.5GHz-40GHz_ VERTICAL

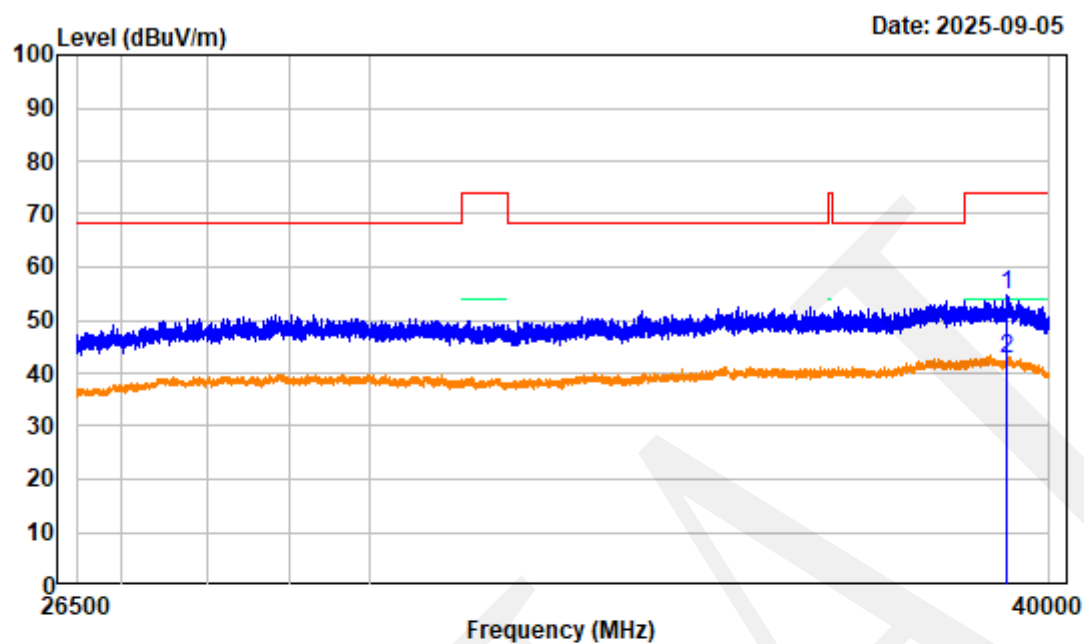

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5745MHz 26.5-40GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39287.880	2.86	51.70	54.56	74.00	-19.44	Peak
2 39287.880	2.86	39.66	42.52	54.00	-11.48	Average

802.11AX20 Low Channel Bandedge_HORIZONTAL

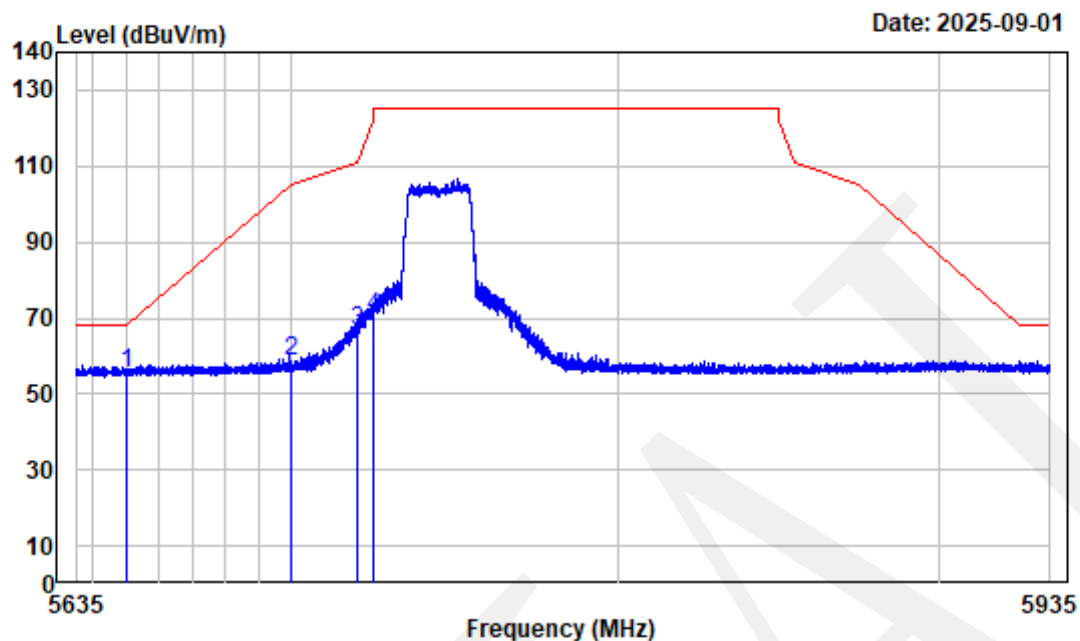

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5745MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	60.33	55.61	68.20	-12.59	peak
2	5700.000	-4.35	62.97	58.62	105.20	-46.58	peak
3	5720.000	-4.43	70.92	66.49	110.80	-44.31	peak
4	5725.000	-4.45	74.83	70.38	122.20	-51.82	peak

802.11AX20 Low Channel Bandedge_VERTICAL

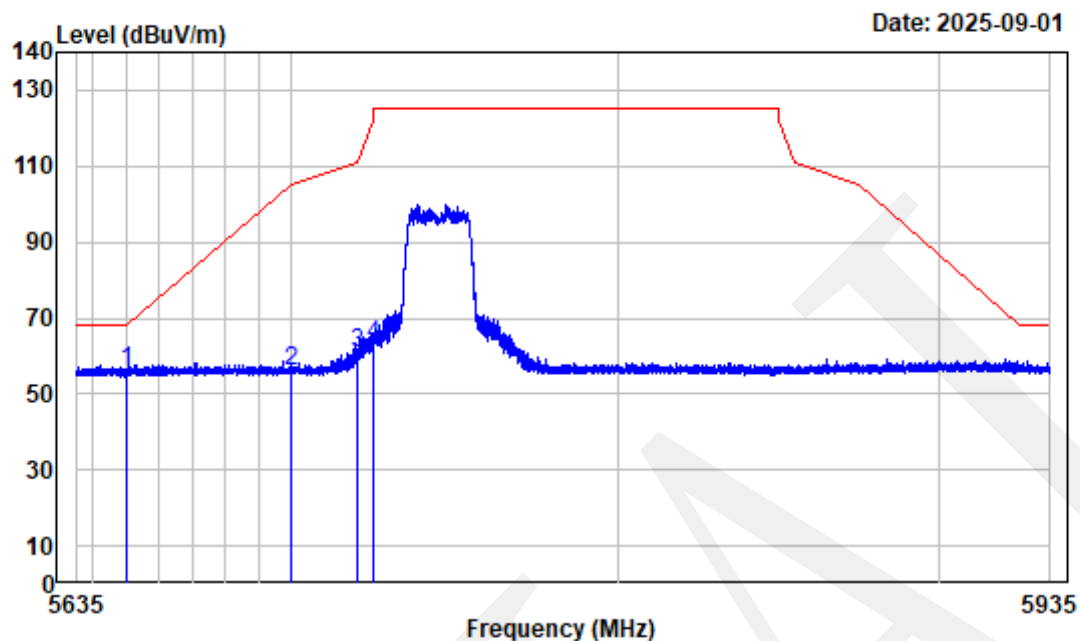

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5745MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	60.47	55.75	68.20	-12.45	peak
2	5700.000	-4.35	60.50	56.15	105.20	-49.05	peak
3	5720.000	-4.43	65.30	60.87	110.80	-49.93	peak
4	5725.000	-4.45	67.21	62.76	122.20	-59.44	peak


802.11AX20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

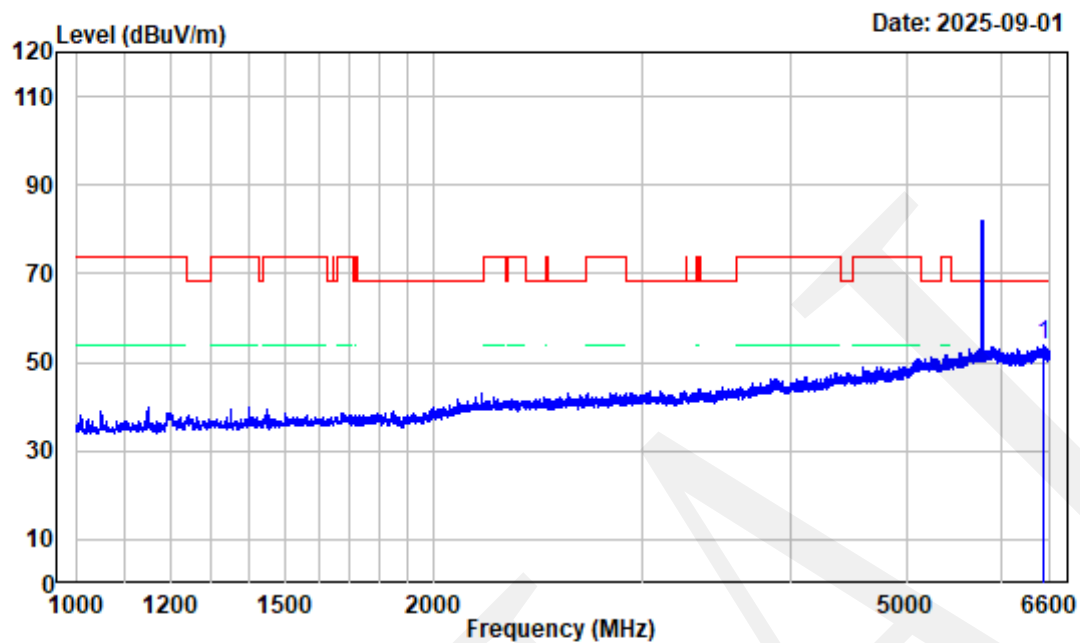

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Middle Channel 5785MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6520.200	-3.76	57.46	53.70	68.20	-14.50 peak

802.11AX20 Middle Channel 1GHz-6.6GHz_VERTICAL

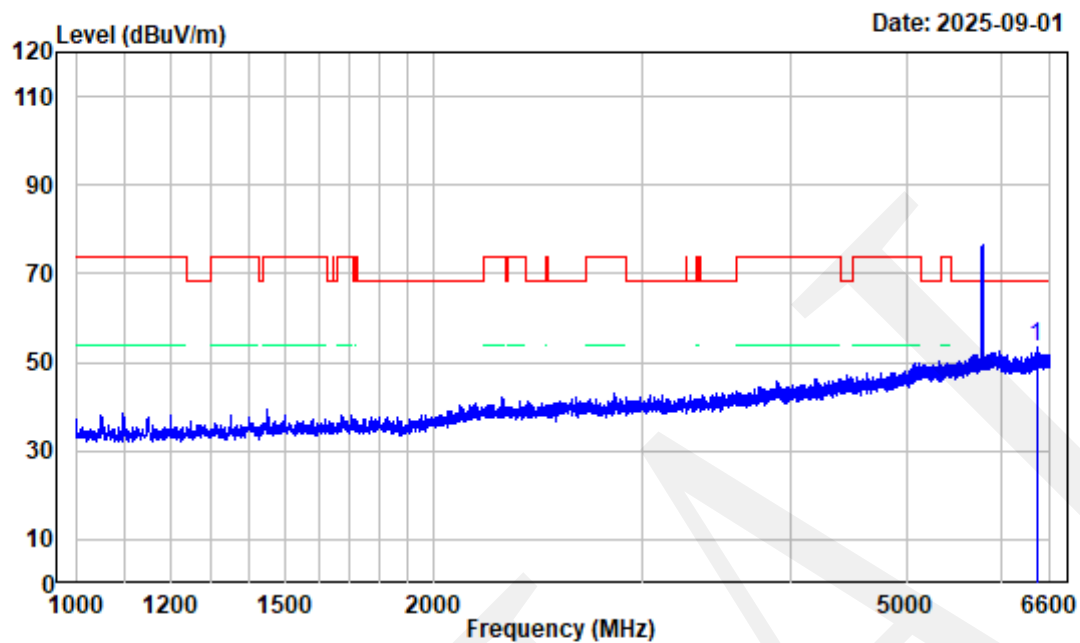


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting
Note : 802.11AX20 Middle Channel 5785MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Tester:Kevin Lv

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6429.200	-3.54	57.11	53.57	68.20	-14.63 peak

802.11AX20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

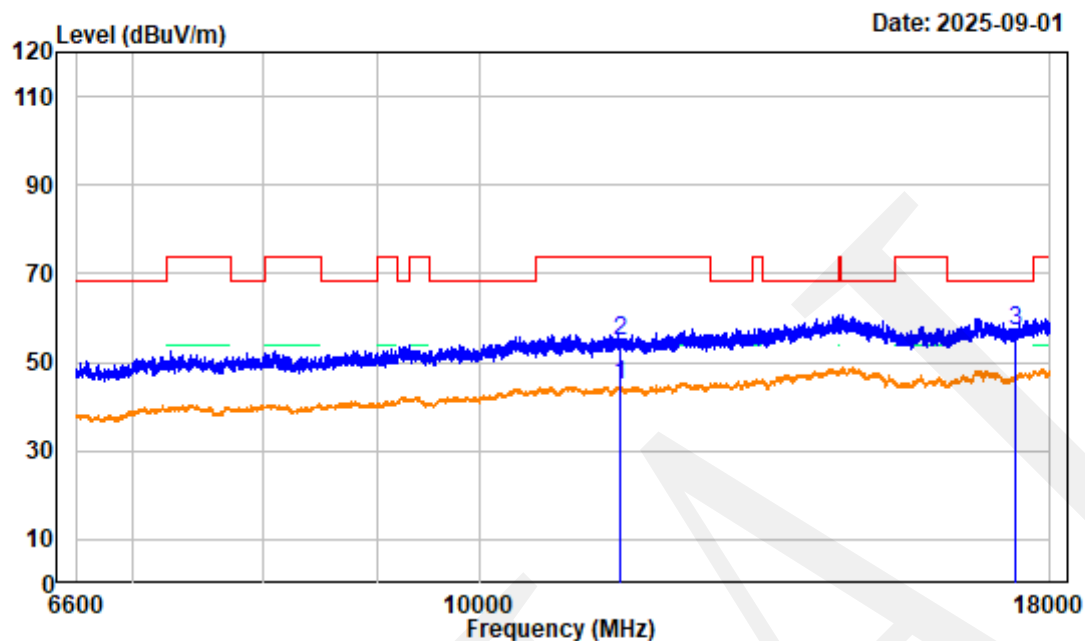

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Middle Channel 5785MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	6.02	38.88	44.90	54.00	-9.10 Average
2	11570.000	6.02	48.91	54.93	74.00	-19.07 peak
3	17355.000	6.60	50.59	57.19	68.20	-11.01 peak

802.11AX20 Middle Channel 6.6GHz-18GHz_VERTICAL

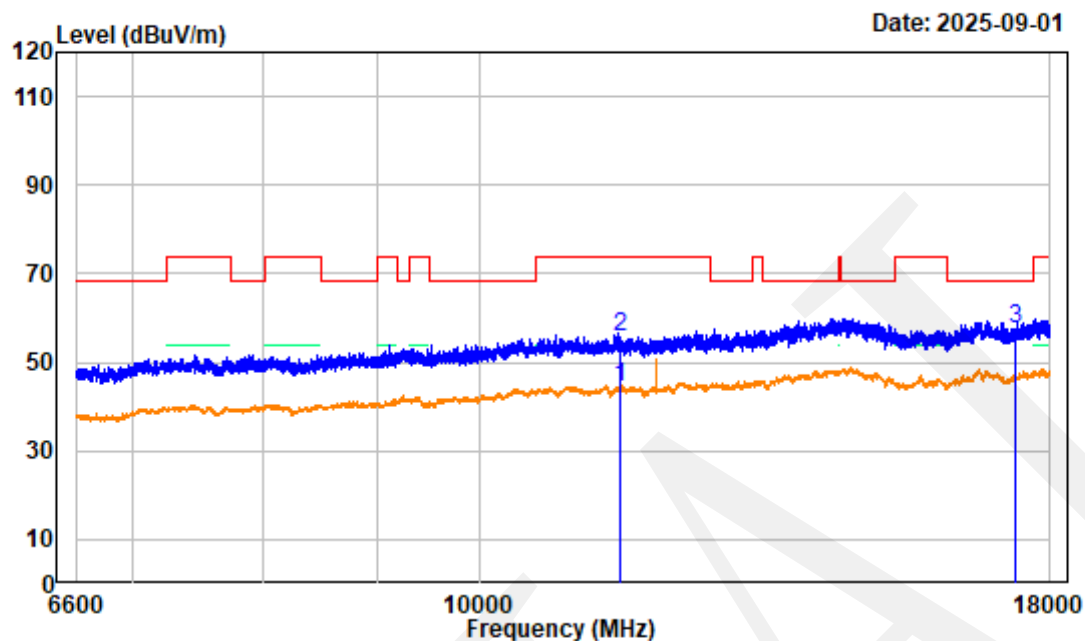

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Middle Channel 5785MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	6.02	38.51	44.53	54.00	-9.47	Average
2	11570.000	6.02	49.53	55.55	74.00	-18.45	peak
3	17355.000	6.60	50.97	57.57	68.20	-10.63	peak

802.11AX20 High Channel 1GHz-6.6GHz_HORIZONTAL

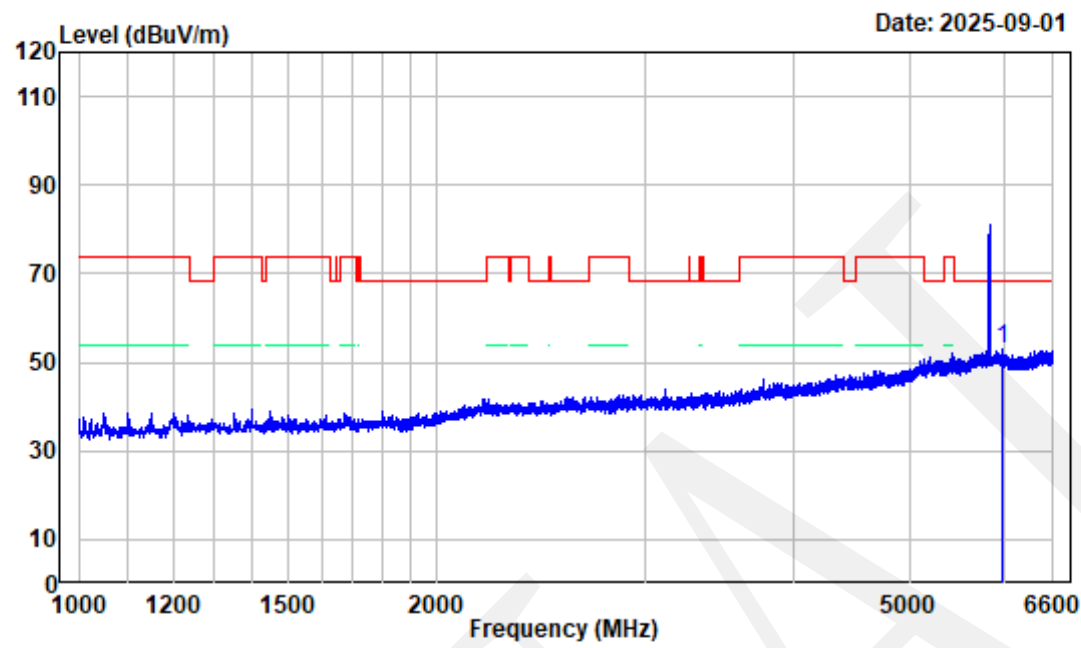

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AX20 High Channel 5825MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5974.200	-4.78	57.95	53.17	68.20	-15.03 peak


802.11AX20 High Channel 1GHz-6.6GHz_VERTICAL

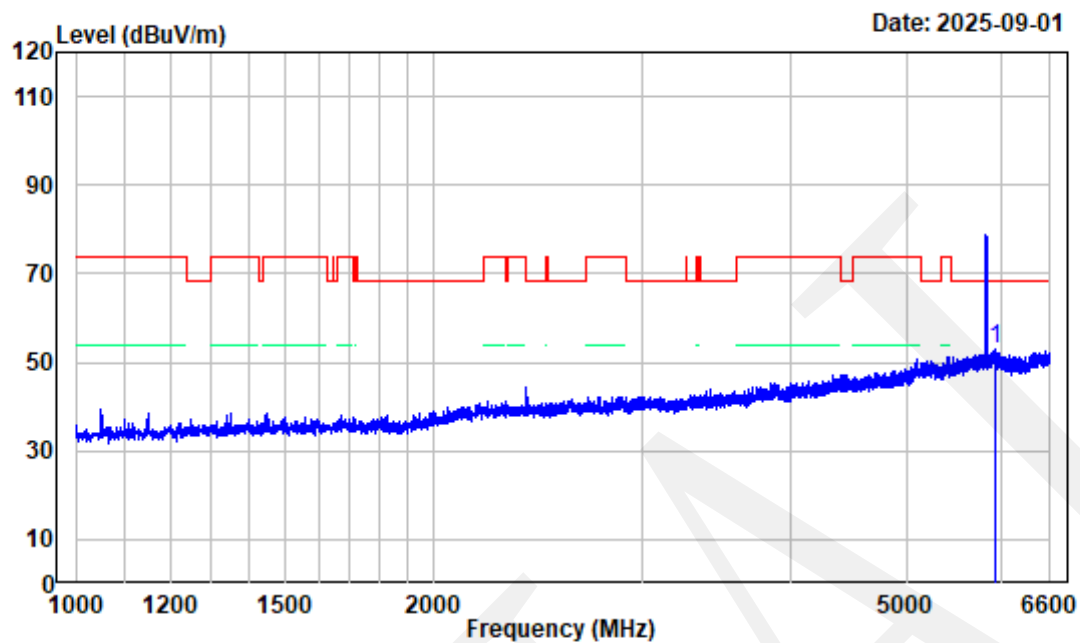

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5825MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5939.900	-4.50	57.36	52.86	68.20	-15.34 peak

802.11AX20 High Channel 6.6GHz-18GHz_HORIZONTAL

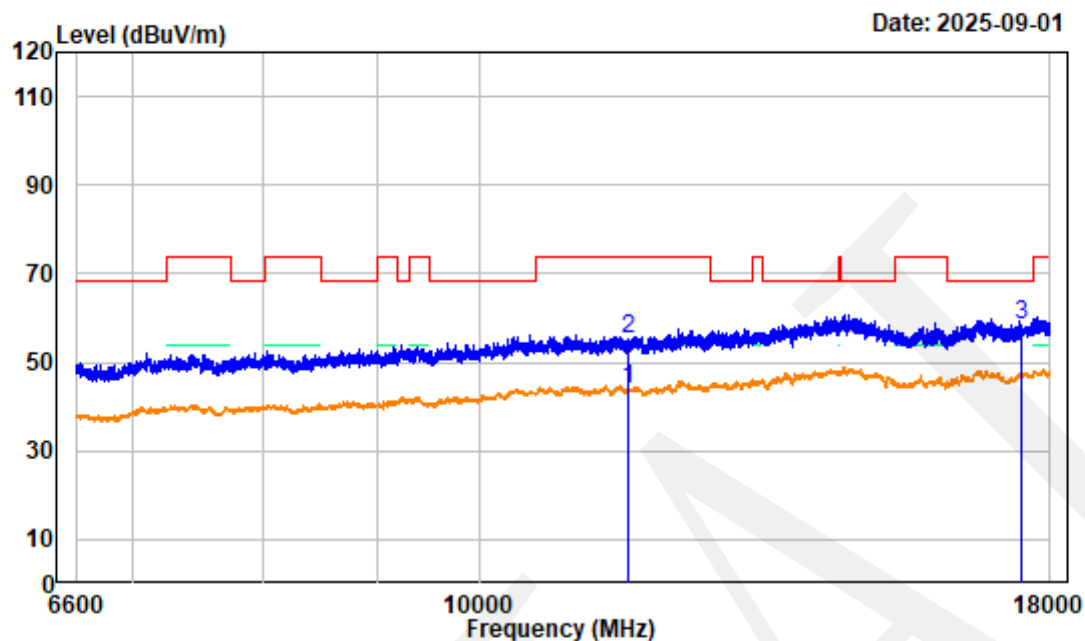

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5825MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.36	38.67	44.03	54.00	-9.97	Average
2	11650.000	5.36	49.66	55.02	74.00	-18.98	peak
3	17475.000	7.21	51.13	58.34	68.20	-9.86	peak

802.11AX20 High Channel 6.6GHz-18GHz_VERTICAL

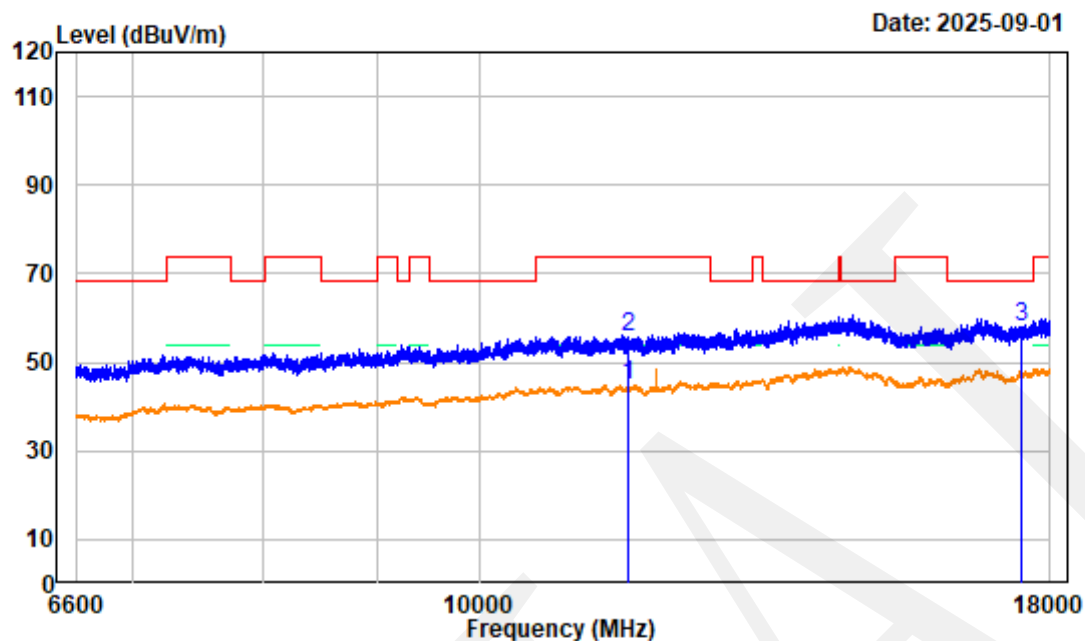

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5825MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.36	39.41	44.77	54.00	-9.23	Average
2	11650.000	5.36	50.38	55.74	74.00	-18.26	peak
3	17475.000	7.21	50.95	58.16	68.20	-10.04	peak

802.11AX20 High Channel Bandedge_HORIZONTAL

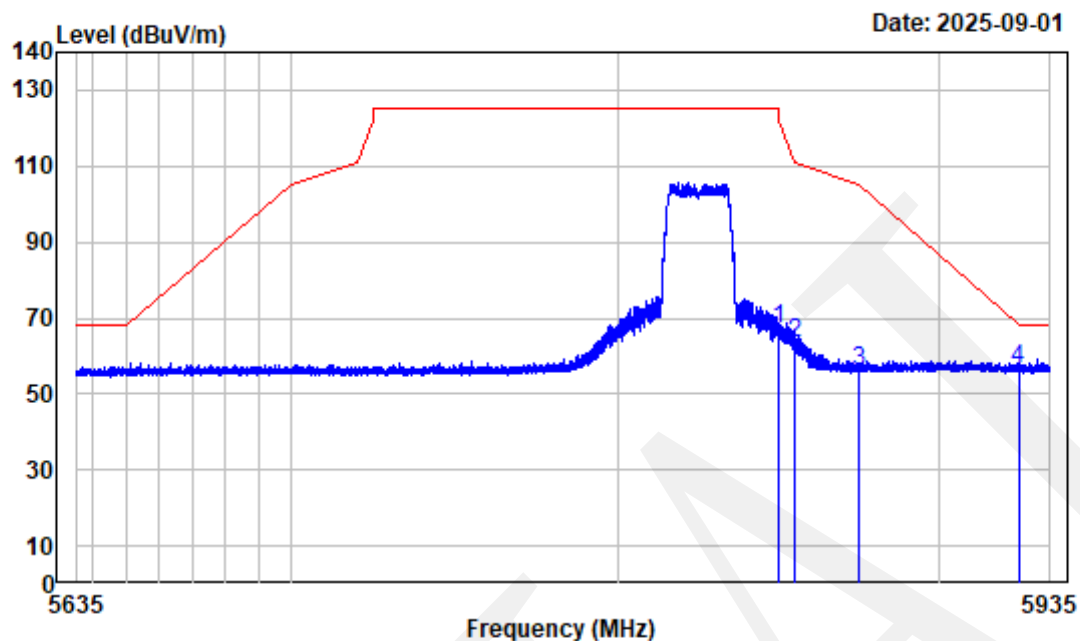

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5825MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	71.74	67.20	122.20	-55.00	peak
2	5855.000	-4.48	67.73	63.25	110.80	-47.55	peak
3	5875.000	-4.20	60.25	56.05	105.20	-49.15	peak
4	5925.000	-4.27	60.88	56.61	68.20	-11.59	peak

802.11AX20 High Channel Bandedge_VERTICAL

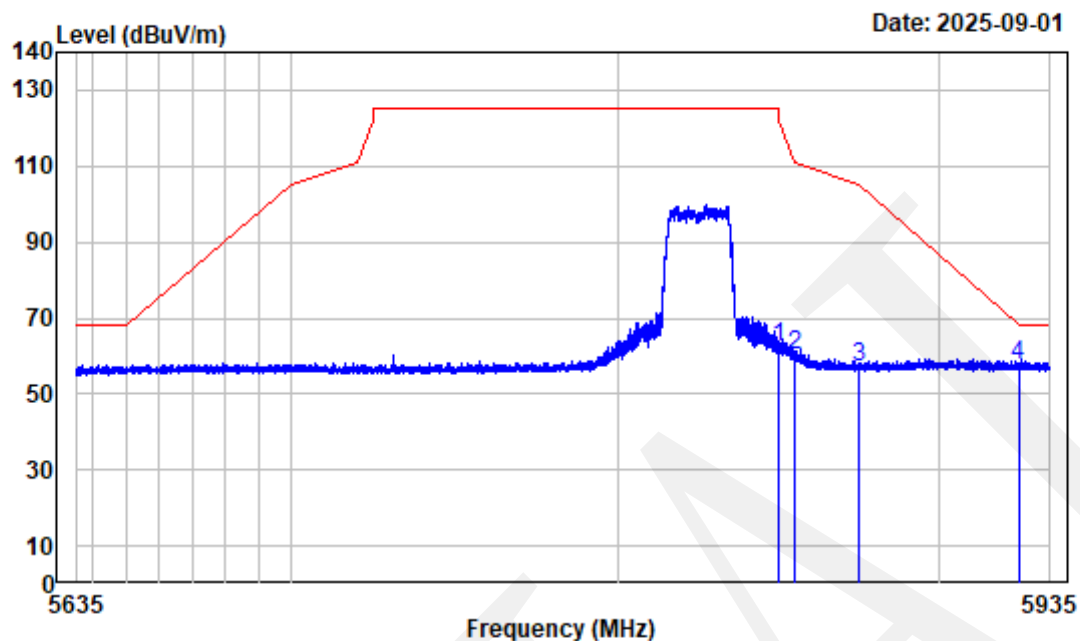

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5825MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	67.08	62.54	122.20	-59.66	peak
2	5855.000	-4.48	64.57	60.09	110.80	-50.71	peak
3	5875.000	-4.20	61.33	57.13	105.20	-48.07	peak
4	5925.000	-4.27	61.79	57.52	68.20	-10.68	peak


802.11AX40 Low Channel 1GHz-6.6GHz_HORIZONTAL

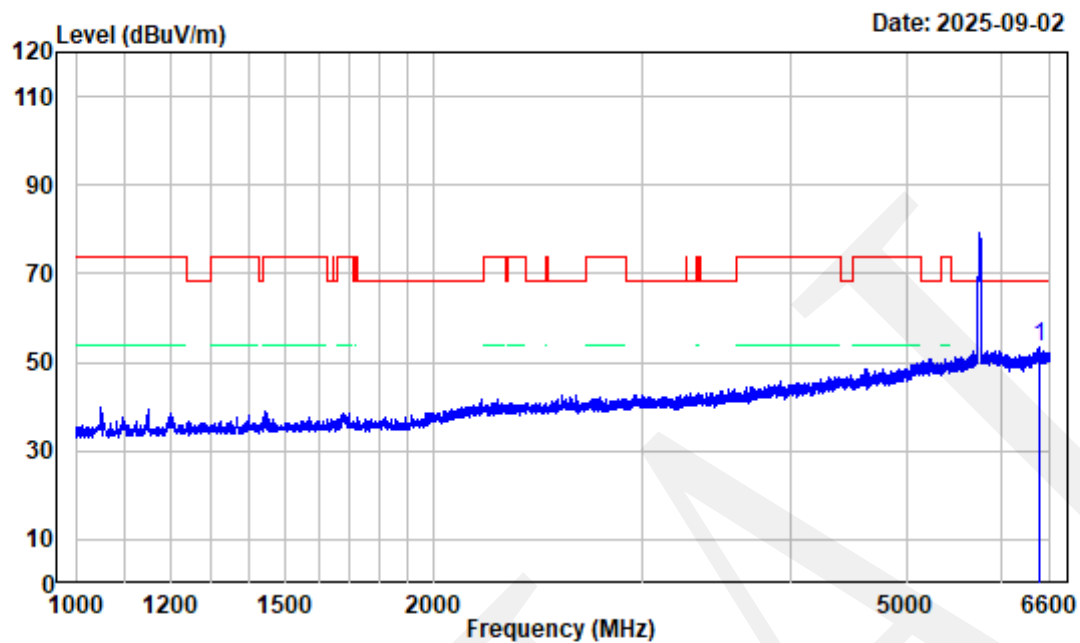

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5755MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6465.600	-3.57	57.16	53.59	68.20	-14.61 peak


802.11AX40 Low Channel 1GHz-6.6GHz_VERTICAL

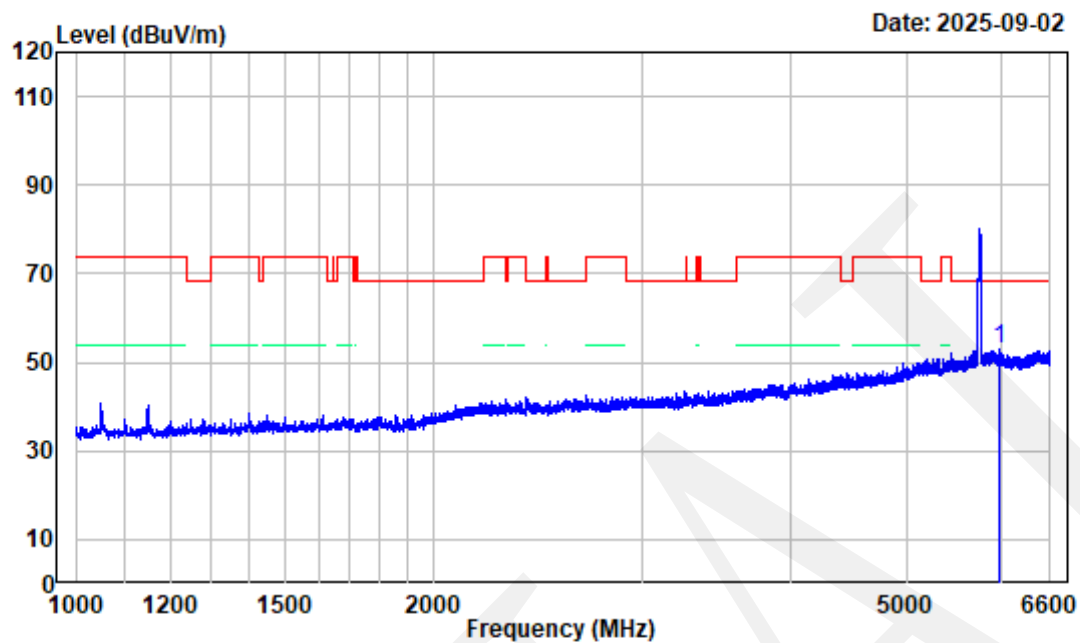

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5755MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5979.100	-4.80	57.96	53.16	68.20	-15.04 peak

802.11AX40 Low Channel 6.6GHz-18GHz_HORIZONTAL

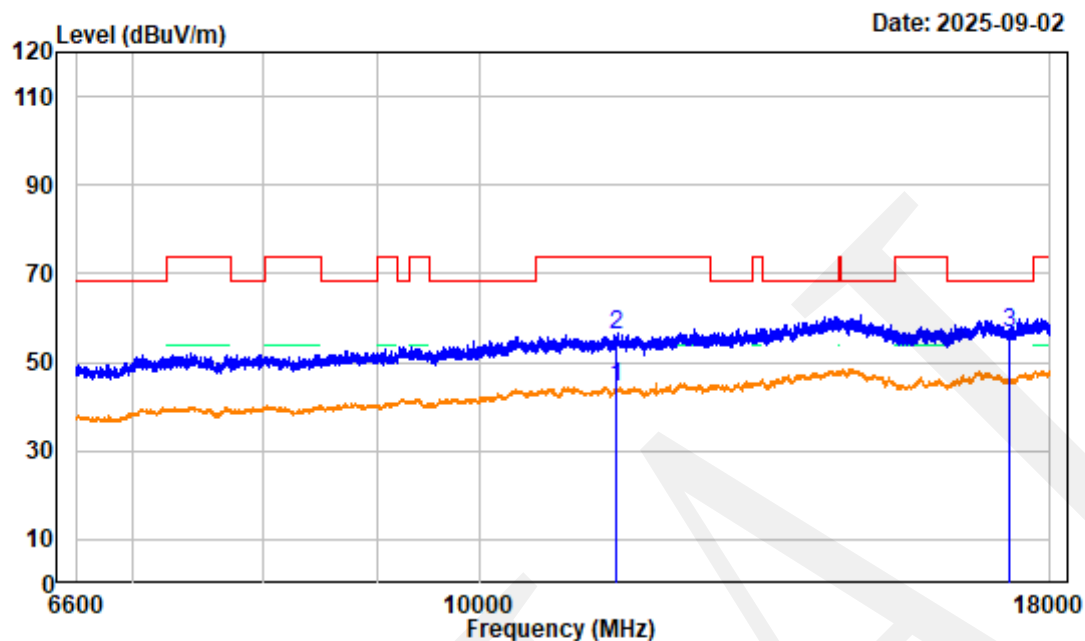

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5755MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	6.44	37.78	44.22	54.00	-9.78	Average
2	11510.000	6.44	49.83	56.27	74.00	-17.73	peak
3	17265.000	6.75	49.73	56.48	68.20	-11.72	peak

802.11AX40 Low Channel 6.6GHz-18GHz_VERTICAL

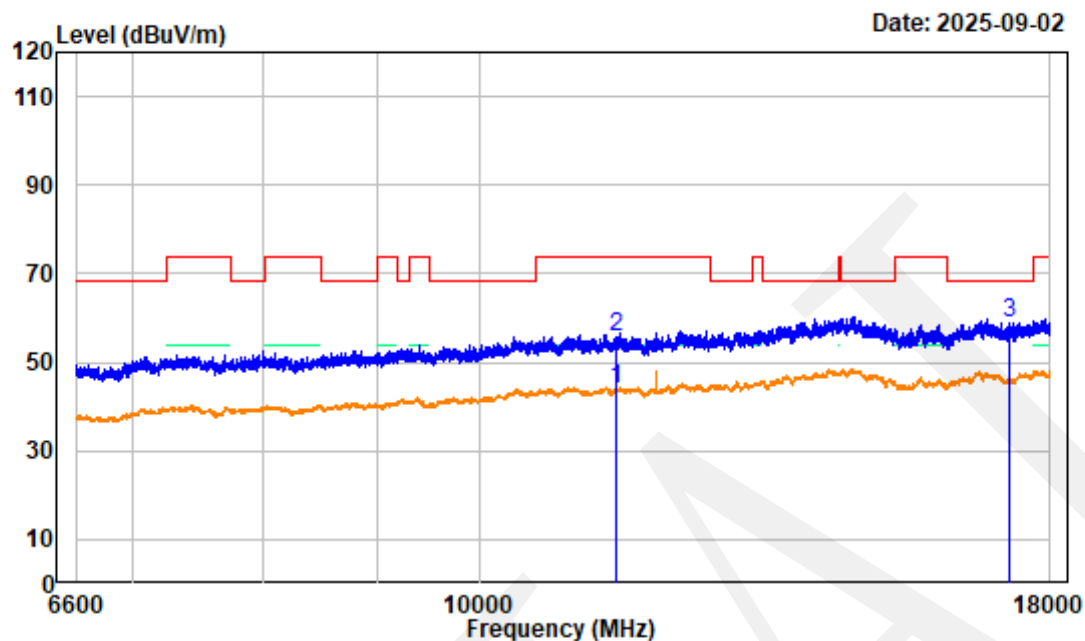

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5755MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	6.44	37.29	43.73	54.00	-10.27	Average
2	11510.000	6.44	49.35	55.79	74.00	-18.21	peak
3	17265.000	6.75	52.09	58.84	68.20	-9.36	peak

802.11AX40 Low Channel Bandedge_HORIZONTAL

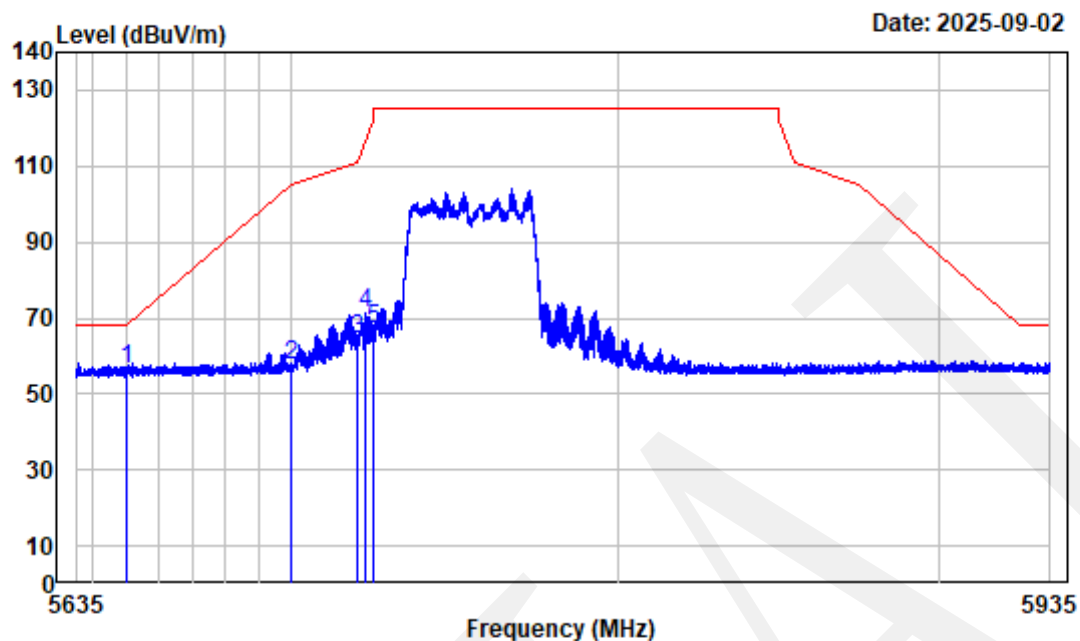

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5755MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	61.22	56.50	68.20	-11.70	peak
2	5700.000	-4.35	61.71	57.36	105.20	-47.84	peak
3	5720.000	-4.43	69.02	64.59	110.80	-46.21	peak
4	5722.788	-4.44	76.02	71.58	117.16	-45.58	Peak
5	5725.000	-4.45	71.75	67.30	122.20	-54.90	peak

802.11AX40 Low Channel Bandedge_VERTICAL

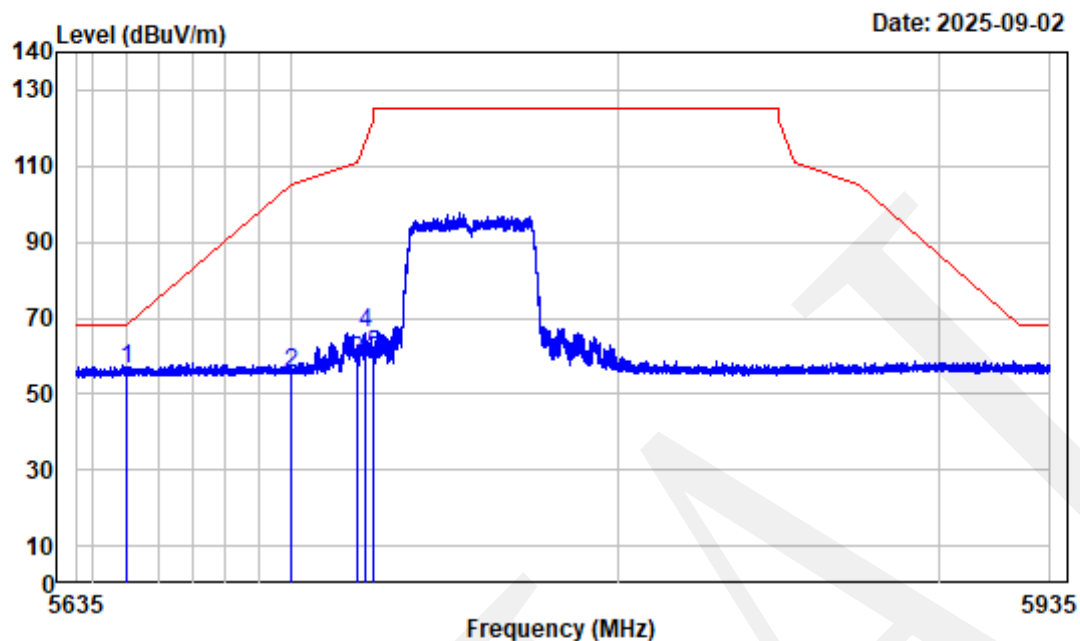

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5755MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	61.16	56.44	68.20	-11.76	peak
2	5700.000	-4.35	59.99	55.64	105.20	-49.56	peak
3	5720.000	-4.43	63.07	58.64	110.80	-52.16	peak
4	5722.788	-4.44	70.37	65.93	117.16	-51.23	Peak
5	5725.000	-4.45	64.73	60.28	122.20	-61.92	peak


802.11AX40 High Channel 1GHz-6.6GHz_HORIZONTAL

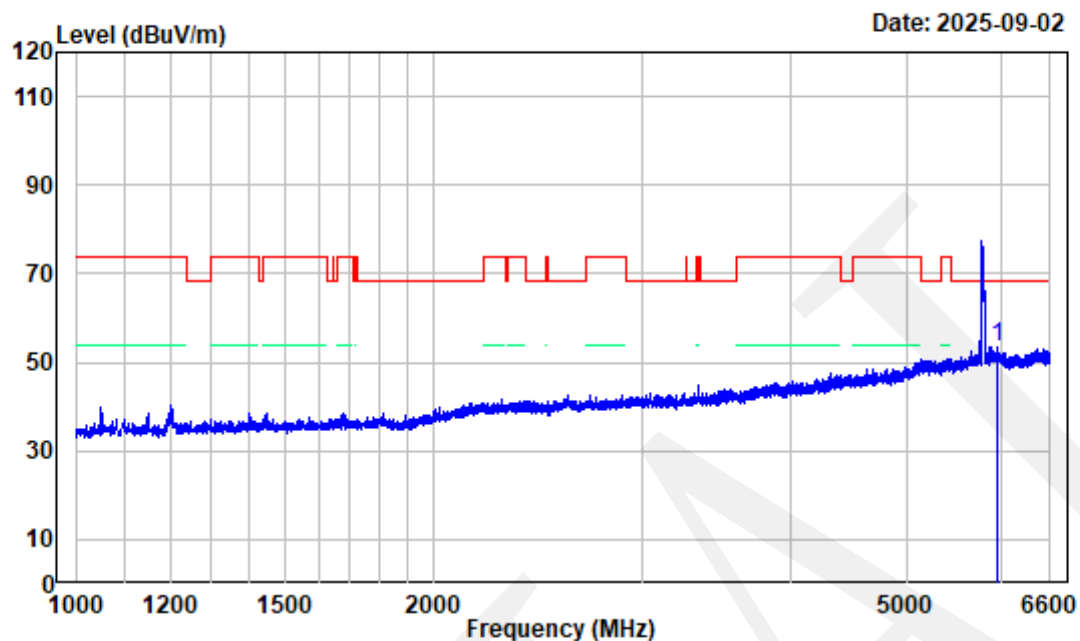

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5795MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5960.900	-4.72	58.37	53.65	68.20	-14.55 peak

802.11AX40 High Channel 1GHz-6.6GHz_VERTICAL

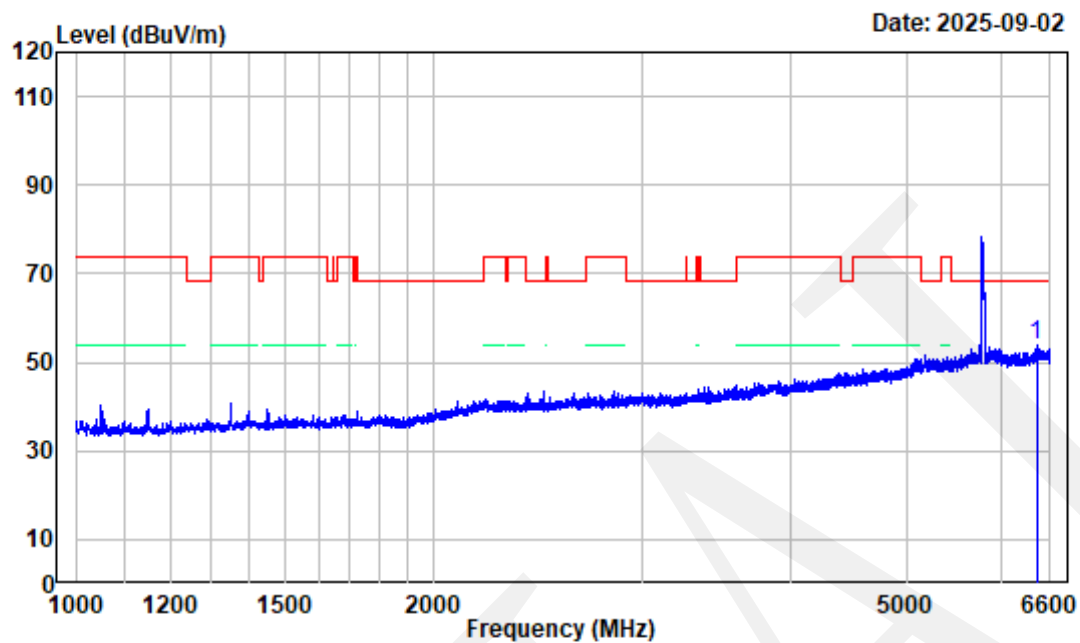


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting
Note : 802.11AX40 High Channel 5795MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Tester:Kevin Lv

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6428.500	-3.54	57.24	53.70	68.20	-14.50 peak

802.11AX40 High Channel 6.6GHz-18GHz_HORIZONTAL

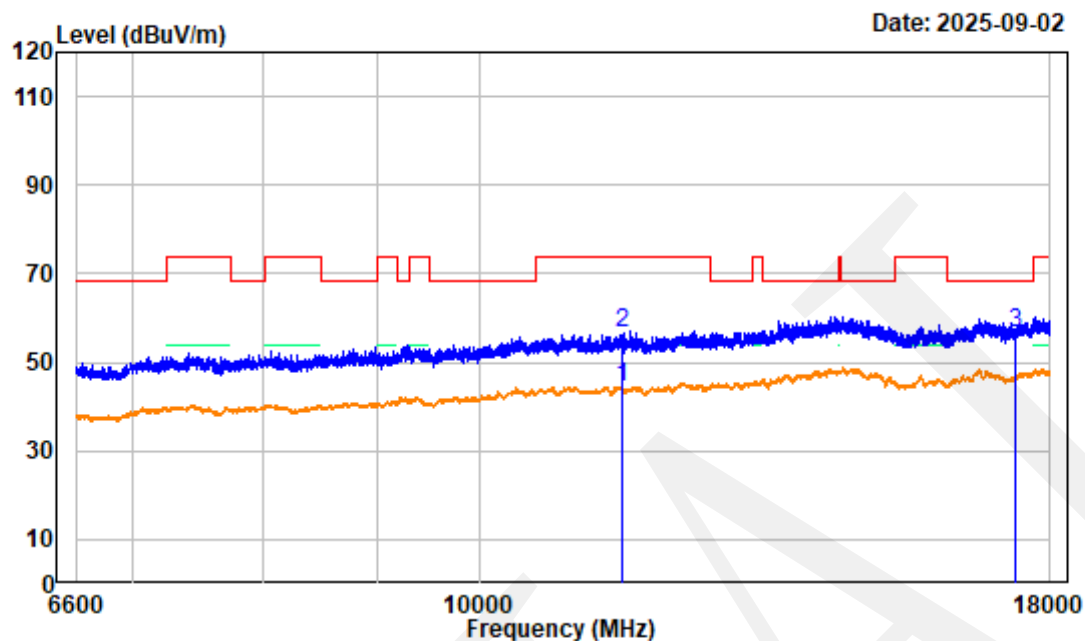

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5795MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	5.82	38.74	44.56	54.00	-9.44	Average
2	11590.000	5.82	50.77	56.59	74.00	-17.41	peak
3	17385.000	6.77	50.01	56.78	68.20	-11.42	peak

802.11AX40 High Channel 6.6GHz-18GHz_VERTICAL

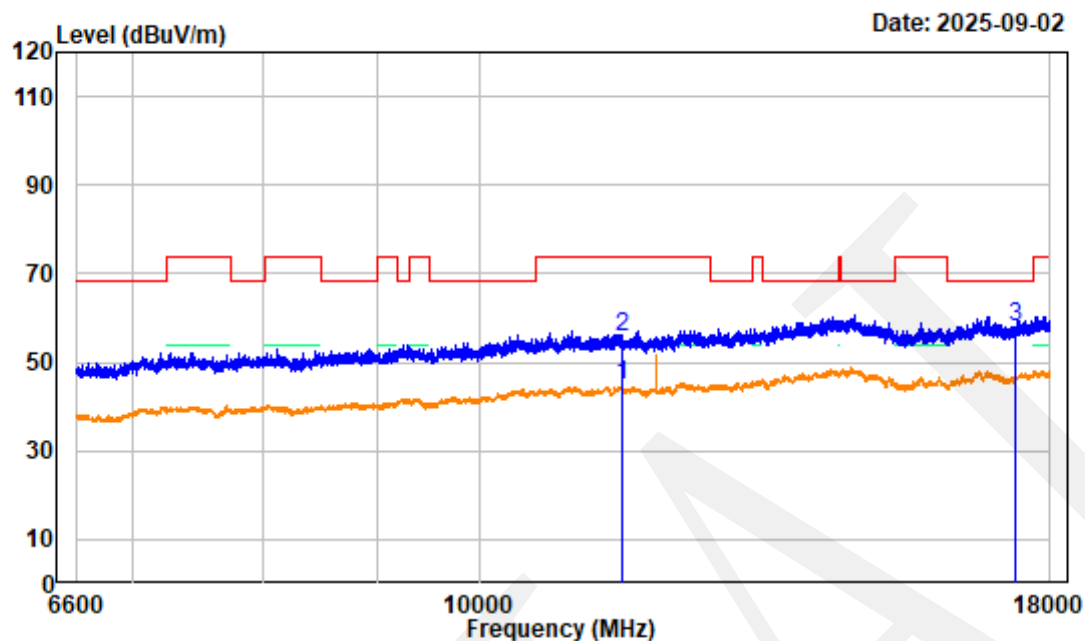

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5795MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	5.82	38.93	44.75	54.00	-9.25	Average
2	11590.000	5.82	49.89	55.71	74.00	-18.29	peak
3	17385.000	6.77	51.33	58.10	68.20	-10.10	peak

802.11AX40 High Channel Bandedge_HORIZONTAL

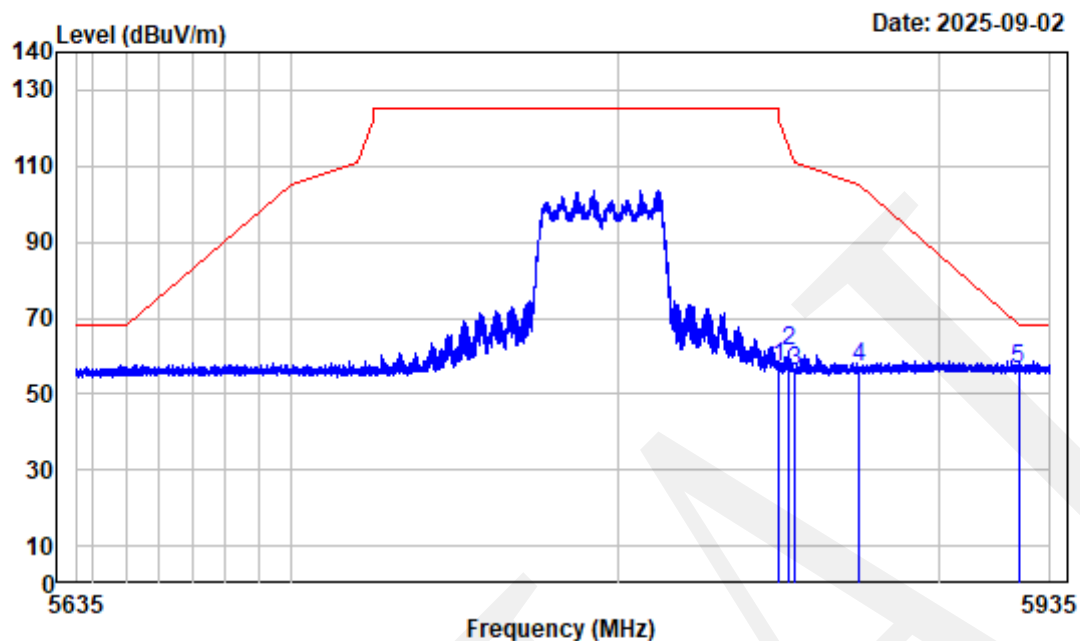

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5795MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	61.53	56.99	122.20	-65.21	peak
2	5852.725	-4.50	65.67	61.17	115.99	-54.82	Peak
3	5855.000	-4.48	60.59	56.11	110.80	-54.69	peak
4	5875.000	-4.20	61.49	57.29	105.20	-47.91	peak
5	5925.000	-4.27	60.56	56.29	68.20	-11.91	peak

802.11AX40 High Channel Bandedge_VERTICAL

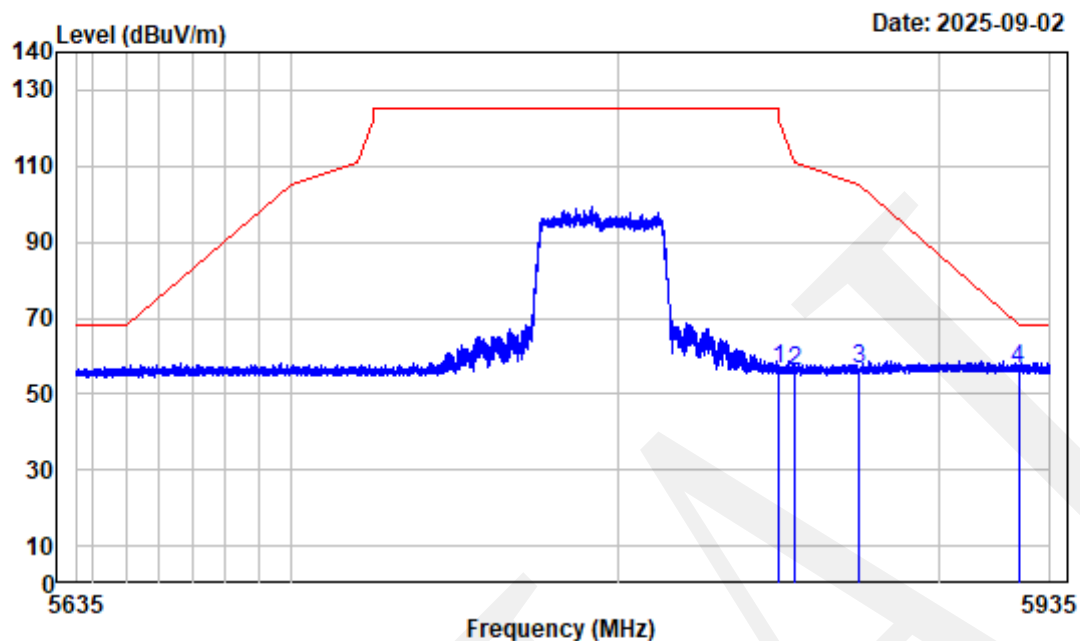

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5795MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	61.02	56.48	122.20	-65.72	peak
2	5855.000	-4.48	60.54	56.06	110.80	-54.74	peak
3	5875.000	-4.20	60.47	56.27	105.20	-48.93	peak
4	5925.000	-4.27	60.55	56.28	68.20	-11.92	peak


802.11AX80 Channel 1GHz-6.6GHz_HORIZONTAL

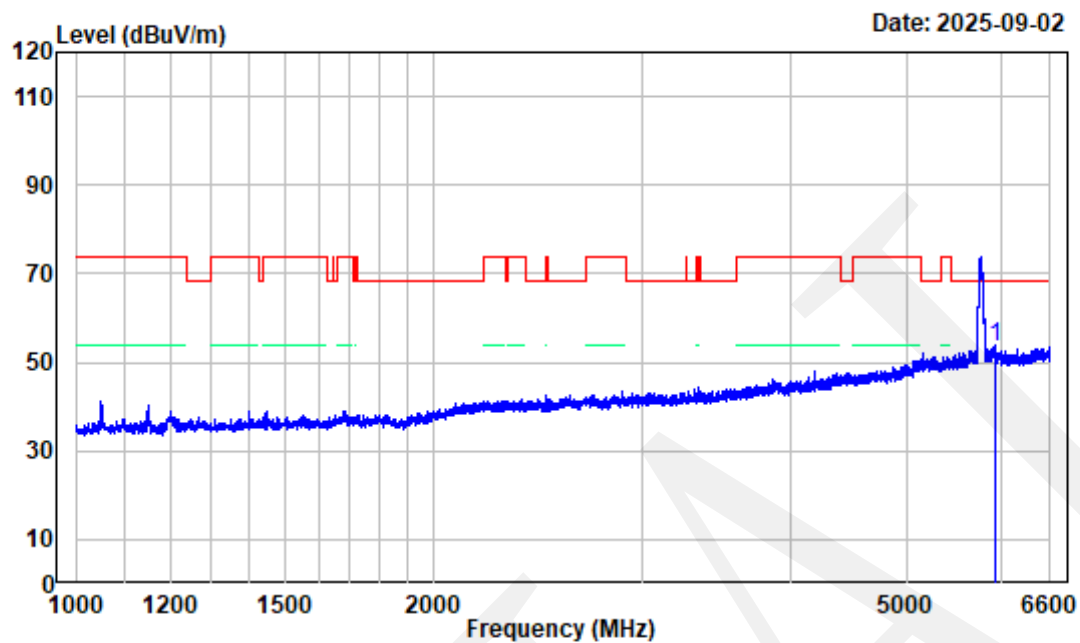

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX80 Channel 5775MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5939.200	-4.49	57.78	53.29	68.20	-14.91	peak

802.11AX80 Channel 1GHz-6.6GHz_VERTICAL

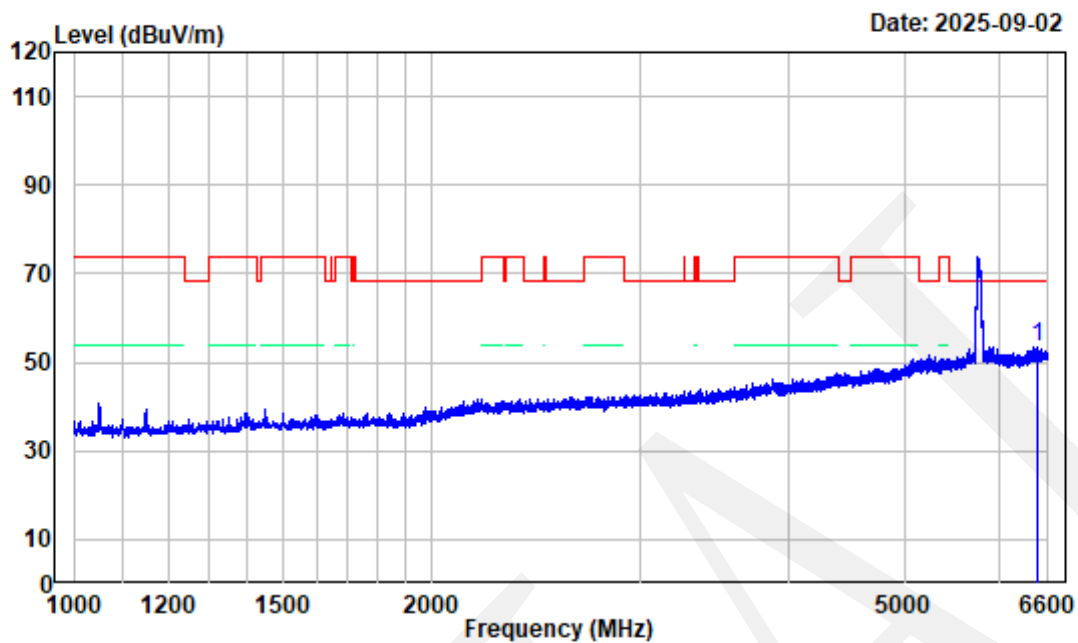

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX80 Channel 5775MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6471.900	-3.63	57.17	53.54	68.20	-14.66 peak


802.11AX80 Channel 6.6GHz-18GHz_HORIZONTAL

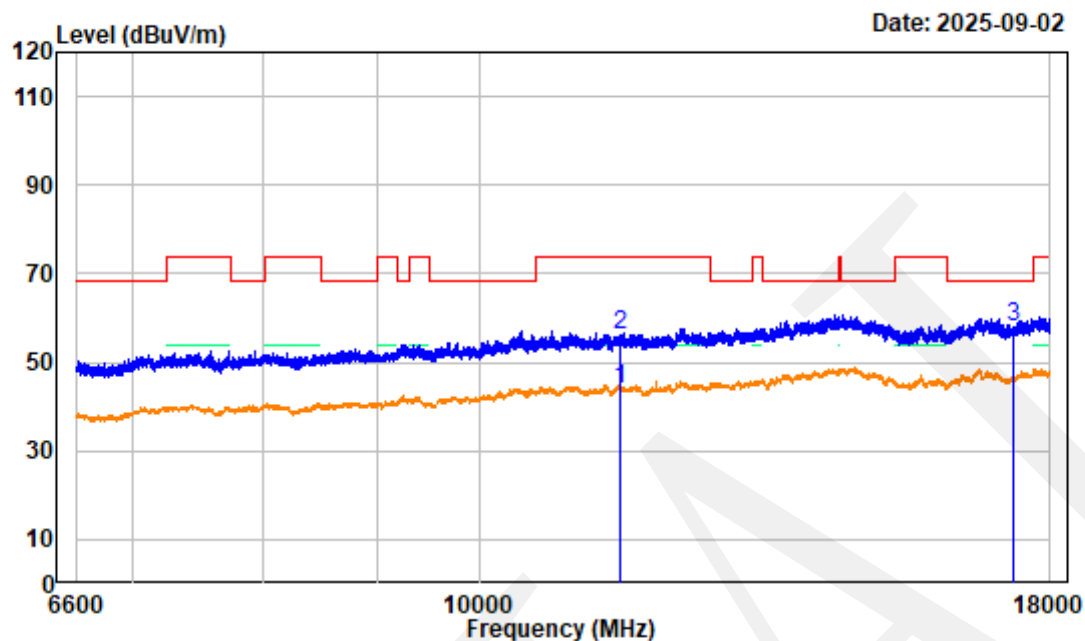

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504U35143E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX80 Channel 5775MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	6.21	37.91	44.12	54.00	-9.88	average
2	11550.000	6.21	49.98	56.19	74.00	-17.81	peak
3	17325.000	6.59	51.52	58.11	68.20	-10.09	peak

802.11AX80 Channel 6.6GHz-18GHz_VERTICAL

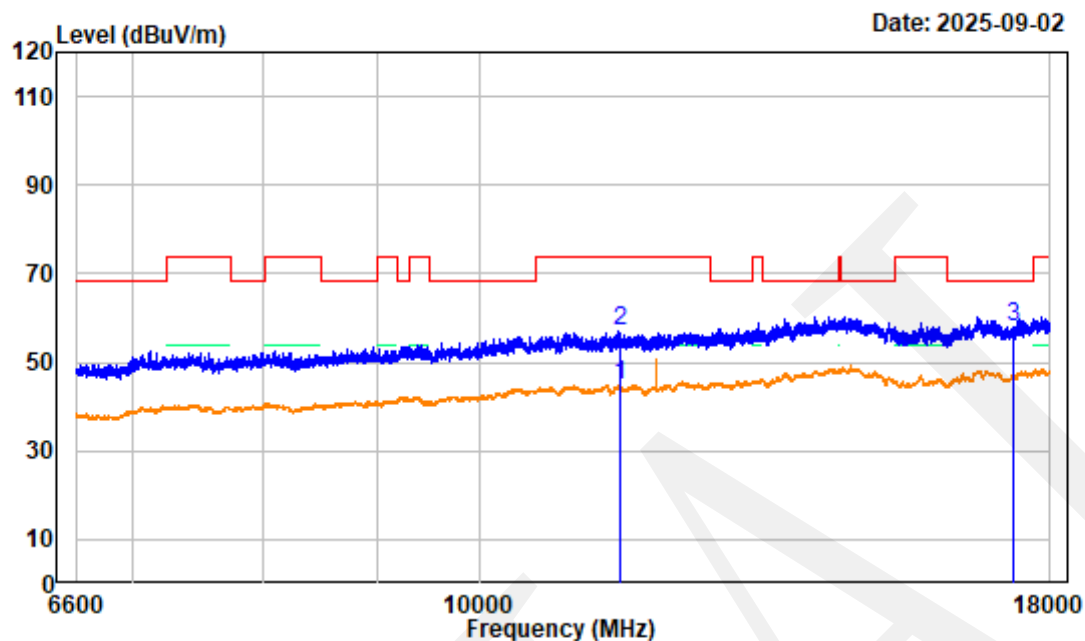

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX80 Channel 5775MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	6.21	38.68	44.89	54.00	-9.11	average
2	11550.000	6.21	50.65	56.86	74.00	-17.14	peak
3	17325.000	6.59	51.37	57.96	68.20	-10.24	peak


802.11AX80 Channel Bandedge_HORIZONTAL

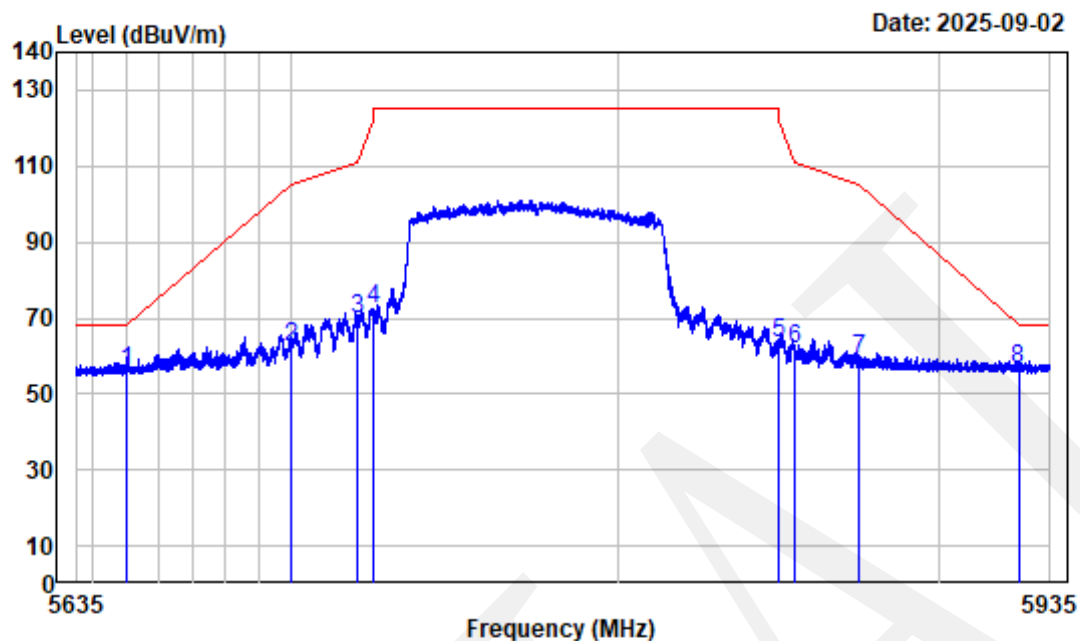

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504U35143E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX80 Channel 5775MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	60.94	56.22	68.20	-11.98	peak
2	5700.000	-4.35	66.71	62.36	105.20	-42.84	peak
3	5720.000	-4.43	74.31	69.88	110.80	-40.92	peak
4	5725.000	-4.45	76.71	72.26	122.20	-49.94	peak
5	5850.000	-4.54	68.03	63.49	122.20	-58.71	peak
6	5855.000	-4.48	66.07	61.59	110.80	-49.21	peak
7	5875.000	-4.20	63.33	59.13	105.20	-46.07	peak
8	5925.000	-4.27	60.91	56.64	68.20	-11.56	peak

802.11AX80 Channel Bandedge_VERTICAL

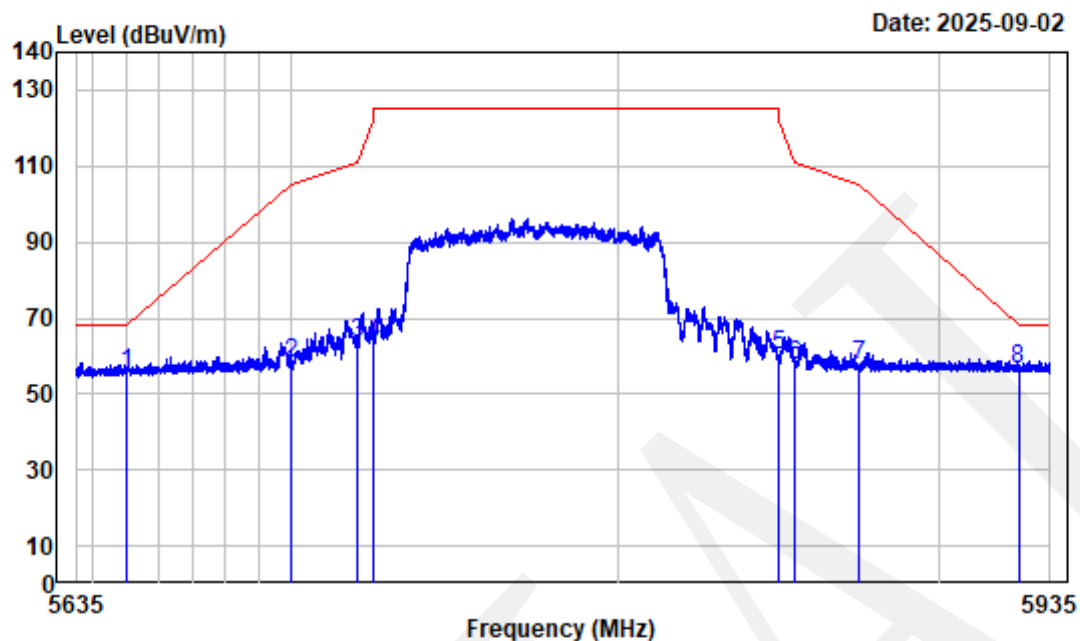

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504U35143E-RF

Test Mode : Transmitting

Tester:Kevin Lv

Note : 802.11AX80 Channel 5775MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	60.32	55.60	68.20	-12.60	peak
2	5700.000	-4.35	62.35	58.00	105.20	-47.20	peak
3	5720.000	-4.43	67.86	63.43	110.80	-47.37	peak
4	5725.000	-4.45	67.94	63.49	122.20	-58.71	peak
5	5850.000	-4.54	64.90	60.36	122.20	-61.84	peak
6	5855.000	-4.48	61.93	57.45	110.80	-53.35	peak
7	5875.000	-4.20	61.60	57.40	105.20	-47.80	peak
8	5925.000	-4.27	60.57	56.30	68.20	-11.90	peak