

Acknowledgment Letter

customer name: Shenzhen Jiayucang Technology Co., Ltd.

Customer P/N: 25.25238-1

Model: YZ-G25-6.8UH-3200GS-8MM

Date: 2026 年 1 月 23 日

Supplier: Dongguan Jierestech Technology Co., Ltd.



draw	Review	Approve
Wang lizhi	Deng xianggui	Lur isheng

Tel:

Fax: 86+13632701380

Address: No. 96 Langhu Road, Dalingshan Town, Dongguan City (3rd floor,
Building L, Jinxiangda Science and Technology Park)

一、Plan view diagram: Unit: MM

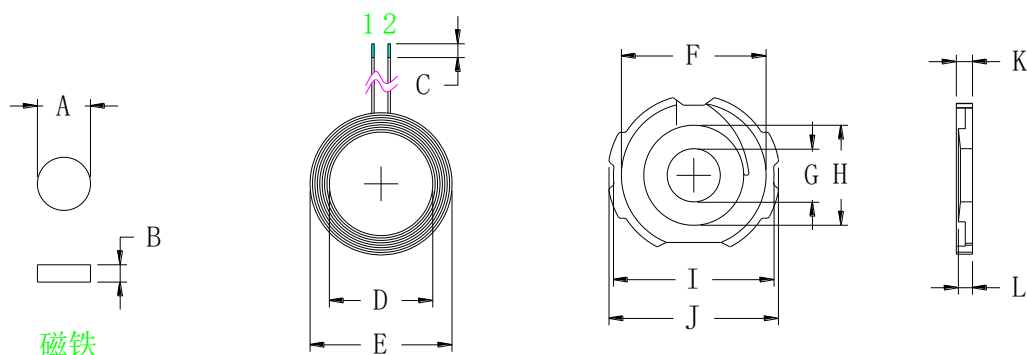

A	7.65 ± 0.1
B	2.0 ± 0.1
C	2.0 ± 1
D	15 ± 0.2
E	20.7 ± 0.3
F	21 ± 0.2
G	7.7 ± 0.1
H	14.5 ± 0.2
I	23.5 ± 0.3
J	25 ± 0.2
K	2.6 ± 0.15
L	2.5 ± 0.15
M	8 ± 1

二、Product Parameter

foot	Diameter	Turns	Note
1 - 2	0.08*24P	12T	Hot air twisted yarn

三、technical requirements

1. Fix the ends of the wires properly to prevent them from loosening or breaking.
2. Cut the excessively long wire ends according to the customer's requirements, tin them, and ensure that the tin coating depth is uniformly 2 ± 1 MM.
3. Apply appropriate white glue on the magnetic sheet, attach the coil, and during the process, keep the product surface clean and tidy.
4. The used magnetic sheets have round holes and are undamaged.
5. Additional processing (as per customer's requirements): Install a 7.65*2.0mm magnet in the middle round hole of the finished product, attach a 14mm circular double-sided adhesive on the back of the product, and then package it.

四、electrical parameter

1.Inductance value, Q factor:

$$\text{PIN 1} - 2 = 6.8\text{UH} \pm 0.3\text{UH}$$

$$\text{Q value} \geq 25$$

The above inductance and Q value were measured using the Quanhua 1062A instrument, with a standard of 100 KHz/1.0 Vrms or an equivalent instrument.

五、bill of materials:

No	Name	materials	Supplier	Note
1	Hot air twisted yarn	0.08*24P	Weihaan or dengtong	
2	Disk	G25 Hard Base Material	Tiantong or dengtong	
3	Tin	High-temperature environmental protection	Qiandao or dengtong	
4	White Glue	BY882	Baoyue or dengtong	
5	Strong magnetism	7.65*2.0*3200±100GS	Liansheng or	dengtong
6	Double-sided adhesive tape	513-14mm	Honghui or D	round