



FCC TEST REPORT

FCC ID:2BXIB-V100016A01

Report Number.....: ZKT-2607130738E-2

Date of Test.....: Jul. 22, 2026 to Jul. 28, 2026

Date of issue.....: Jul. 28, 2026

Total number of pages.....: 80

Test Result: PASS

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: VLG Technology Co., Ltd

Address: Unit 605,6/F Building 8, Hong Kong-Shenzhen Innovation and Technology Park, Lok Ma Chau Loop,Hong Kong.

Manufacturer's name: Shenzhen VLG Wireless Technology Co., Ltd.,HuiYang Branch

Address: layer2-4, Building A and layer3,buidingB, west side of Huiao avenue, Sanhe Street, Huiyang district, Huizhou, Guangdong province, China.

Test specification:

Standard.....: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Erratato
C63.10a-2024

Test procedure.....: /

Non-standard test method: N/A

Test Report Form No.....: TRF-EL-110_V0

Test Report Form(s) Originator.....: ZKT Testing

Master TRF: Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name.....: AI Fluffy Pals Smart Interactive Animal Toy

Trademark: N/A

Model/Type reference.....: V100-016-A-01
V100-017-A-01

Ratings.....: Input: 5V---2A
Battery: DC 3.7V, 1000mAh, 3.7Wh



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature).....: Jim Liu

Jim Liu

Reviewer (name + signature).....: Jackson Fang

Jackson Fang

Approved (name + signature).....: Lake Xie





Table of Contents

	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULT	15
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS	17
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	18
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 TEST RESULTS	19
5. RADIATED BAND EMISSIONMEASUREMENT	34
5.1 TEST REQUIREMENT	34
5.2 TEST PROCEDURE	34
5.3 DEVIATION FROM TEST STANDARD	35
5.4 TEST SETUP	35
5.5 EUT OPERATING CONDITIONS	35
5.6 TEST RESULT	36
6.1 APPLIED PROCEDURES / LIMIT	42
6.2 TEST PROCEDURE	42
6.3 DEVIATION FROM STANDARD	42
6.4 TEST SETUP	42
6.5 EUT OPERATION CONDITIONS	42
6.6 TEST RESULT	43



7. 6DB OCCUPIED BANDWIDTH	50
7.1 APPLIED PROCEDURES / LIMIT	50
7.2 TEST PROCEDURE	50
7.3 DEVIATION FROM STANDARD	50
7.4 TEST SETUP	51
7.5 EUT OPERATION CONDITIONS	51
7.6 TEST RESULT	51
8. PEAK OUTPUT POWER TEST	58
8.1 APPLIED PROCEDURES/LIMIT	58
8.2 TEST PROCEDURE	58
8.3 DEVIATION FROM STANDARD	58
8.4 TEST SETUP	58
8.5 EUT OPERATION CONDITIONS	58
8.6 TEST RESULT	59
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	60
9.1 APPLICABLE STANDARD	60
9.2 TEST PROCEDURE	60
9.3 DEVIATION FROM STANDARD	61
9.4 TEST SETUP	61
9.5 EUT OPERATION CONDITIONS	61
9.6 TEST RESULTS	62
10. DUTY CYCLE	74
10.1 APPLIED PROCEDURES / LIMIT	74
10.2 DEVIATION FROM STANDARD	74
10.3 TEST SETUP	74
10.4 EUT OPERATION CONDITIONS	74
10.5 TEST RESULTS	75
11. ANTENNA REQUIREMENT	79
12. TEST SETUP PHOTO	80
13. EUT CONSTRUCTIONAL DETAILS	80



1. VERSION

Report No.	Version	Description	Approved
ZKT-2607130738E-2	Rev.01	Initial issue of report	Jul. 28, 2026



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (c)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	6dB Occupied Bandwidth	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247 (d)	Conducted Band Edge & Unwanted Spurious Emission	PASS	
FCC part 15.205/15.209	Radiated Band Edge & Unwanted Spurious Emission	PASS	
ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Erratato C63.10a-2024	Duty Cycle	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 927491

Designation Number: CN1431

IC Registered No.: 27033

CAB identifier: CN0110

Designation Number: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission (9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission (30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission (1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission (6GHz-40GHz)	U=5.0dB
5	Conducted Disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF Power Conducted	U=1.86dB
8	RF Conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8MHz
10	RF Power Spectral Density	U=1.75dB
11	Humidity Uncertainty	U=5.3%
12	Temperature Uncertainty	U=0.59°C



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	AI Fluffy Pals Smart Interactive Animal Toy
Trademark:	N/A
Model No.:	V100-016-A-01
Serial No.:	V100-017-A-01
Model Different.:	All the model are the same circuit and RF module,Only the model name and external cartoon character are different.
Hardware Version:	V1.0
Software Version:	V1.0
Sample(s) Status:	Engineer sample
Frequency Range:	2412-2462MHz for 802.11 b/g/n20/ax20 2422-2452MHz for 802.11 n40/ax40
Channel Numbers:	802.11b/g/n/ax (20M): 11 Channels 802.11n/ax (40M): 7 Channels
Channel Separation:	5MHz
Modulation Technology:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/n: Orthogonal Frequency Division Multiplexing(OFDM) 802.11ax: Orthogonal Frequency Division Multiple Access(OFDMA)
Data Rate:	802.11b: 1/2/5.5/11Mbit/s 802.11g: 6/9/12/24/18/36/48/54Mbit/s 802.11n: MCS0-MCS7 802.11ax: MCS0-MCS9
Antenna Type:	PCB antenna
Antenna Gain:	3.25dBi
Power Supply:	Input: 5V---2A
Battery:	DC 3.7V, 1000mAh, 3.7Wh

Note1: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

Note2: The EUT's all information provided by client.

Note3: 802.11ax Full RU is supported only.



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency			
	802.11b	802.11g	802.11n20/802.11ax20	802.11n40/802.11ax40
Lowest channel	2412MHz	2412MHz	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz	2437MHz	2437MHz
Highest channel	2462MHz	2462MHz	2462MHz	2452MHz

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data. For battery operated equipment, the equipment tests shall be performed using a new battery.	


We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n20/n40	802.11ax20/ax40
Data rate	1Mbps	6Mbps	MCS0(HT0)	MCS0(HE0)

Test Software & Version	ADB
Mode	Power setting
802.11b	default
802.11g	default
802.11n HT20	default
802.11n HT40	default
802.11ax HE20	default
802.11ax HE40	default




3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	AI Fluffy Pals Smart Interactive Animal Toy	N/A	V100-016-A-01	N/A	EUT
E-2	AC/DC Adapter	UGREEN	X569	E63003923231	Auxiliary
	AC/DC Adapter Input: 100-240V ~ 50/60Hz, 1AMax; Output: 5V/9V/12V/15V/20V/28V				

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	0.8M	Type-C Cable
C2	NO	NO	0.3M	RF Line

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conduction Emissions Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Sep. 23, 2025	Sep. 22, 2026
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Sep. 19, 2025	Sep. 18, 2026
3	Test Cable	N/A	C-01	N/A	N/A	May. 25, 2026	May. 24, 2027
4	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Oct. 24, 2025	Oct. 23, 2026
5	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\

Radiation Emissions & Radiation Spurious Emissions Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 20, 2025	Sep. 19, 2026
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 20, 2025	Sep. 19, 2026
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	100969	4.32	Oct. 24, 2025	Oct. 23, 2026
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	00877	N/A	Sep. 20, 2025	Sep. 19, 2026
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Sep. 20, 2025	Sep. 19, 2026
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Sep. 30, 2025	Sep. 29, 2026
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Sep. 20, 2025	Sep. 19, 2026
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Sep. 19, 2025	Sep. 18, 2026
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Sep. 19, 2025	Sep. 18, 2026
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Oct. 24, 2025	Oct. 23, 2026
11	Test Cable	N/A	R-01	N/A	N/A	May. 25, 2026	May. 24, 2027
12	Test Cable	N/A	R-02	N/A	N/A	May. 25, 2026	May. 24, 2027
13	Test Cable	N/A	R-03	N/A	N/A	May. 25, 2026	May. 24, 2027
14	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	\	\
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802BS	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\



RF Conducted Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 20, 2025	Sep. 19, 2026
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 20, 2025	Sep. 19, 2026
3	Test Cable	N/A	RF-01	N/A	N/A	May. 25, 2026	May. 24, 2027
4	Test Cable	N/A	RF-02	N/A	N/A	May. 25, 2026	May. 24, 2027
5	Test Cable	N/A	RF-03	N/A	N/A	May. 25, 2026	May. 24, 2027
6	ESG Signal Generator	Agilent	E4421B	GB40051203	B.03.84	Sep. 19, 2025	Sep. 18, 2026
7	Signal Generator	Agilent	N5182A	MY47420215	A.01.87	Sep. 20, 2025	Sep. 19, 2026
8	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	N/A	Sep. 25, 2025	Sep. 24, 2026
9	SHIELD BOX	TESCOM	TC-5970C	5970C015553	N/A	Dec. 18, 2025	Dec. 17, 2026
10	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Sep. 28, 2025	Sep. 27, 2026
11	MWRF Power Meter Test system	MW	MW100-R FCB	10371	N/A	Sep. 19, 2025	Sep. 18, 2026
12	MWRF Power Sensor	MW	MW100-P SB	10371	N/A	Sep. 19, 2025	Sep. 18, 2026
13	Power Meter	KEYSIGHT	N1912AP	926431	A.05.00	Sep. 19, 2025	Sep. 18, 2026
14	D.C. Power Supply	LongWei	TPR-6405 D	GQ7516	N/A	Sep. 19, 2025	Sep. 18, 2026
15	Attenuators	XINQY	XQY-SMAJ KS-12-2W	N/A	N/A	Sep. 19, 2025	Sep. 18, 2026
16	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Erratato C63.10a-2024
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

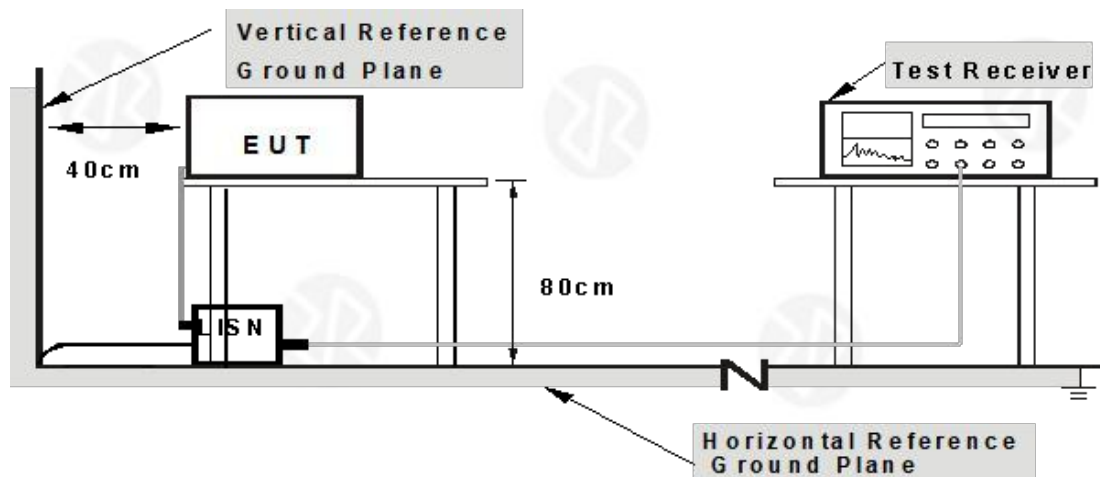

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 TEST RESULT

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	L
Test Voltage:	AC 120V/60Hz	Test Mode:	TX 802.11b- 2412MHz

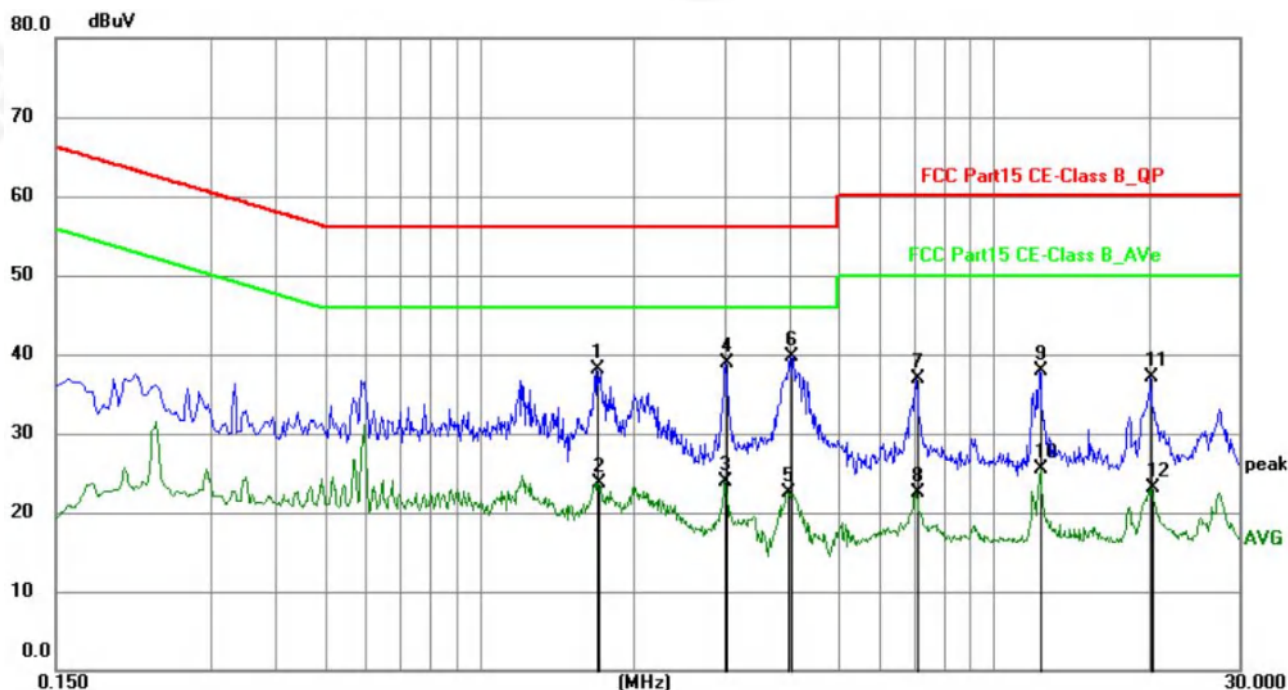


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	1.6934	18.47	19.67	38.14	56.00	-17.86	QP	P
2	1.7022	3.99	19.67	23.66	46.00	-22.34	AVG	P
3	3.0073	4.26	19.69	23.95	46.00	-22.05	AVG	P
4	3.0164	19.12	19.70	38.82	56.00	-17.18	QP	P
5	3.9794	2.82	19.71	22.53	46.00	-23.47	AVG	P
6	4.0468	19.96	19.71	39.67	56.00	-16.33	QP	P
7	7.0845	17.09	19.74	36.83	60.00	-23.17	QP	P
8	7.0845	2.73	19.74	22.47	50.00	-27.53	AVG	P
9	12.3178	18.18	19.76	37.94	60.00	-22.06	QP	P
10	12.3405	5.80	19.76	25.56	50.00	-24.44	AVG	P
11	20.2108	17.23	19.80	37.03	60.00	-22.97	QP	P
12	20.2740	3.24	19.80	23.04	50.00	-26.96	AVG	P

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Lism factor+ Cable loss factor + limiter factor.
- 5.Margin = Measurement Level-Limit.
- 6.The test data shows only the worst case TX 802.11b- 2412MHz.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	N
Test Voltage:	AC 120V/60Hz	Test Mode:	TX 802.11b- 2412MHz

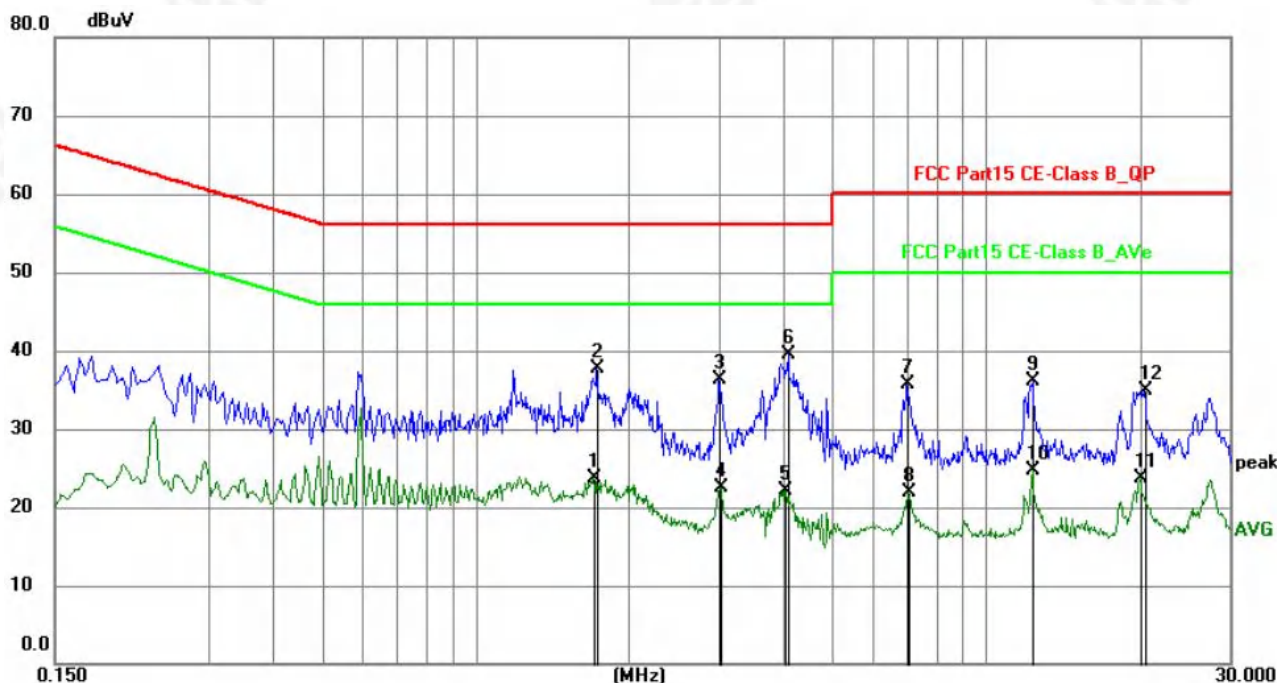

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	1.7022	4.01	19.66	23.67	46.00	-22.33	AVG	P
2	1.7338	17.97	19.66	37.63	56.00	-18.37	QP	P
3	3.0030	16.56	19.68	36.24	56.00	-19.76	QP	P
4	3.0209	2.87	19.68	22.55	46.00	-23.45	AVG	P
5	4.0335	2.43	19.69	22.12	46.00	-23.88	AVG	P
6	4.0918	19.86	19.69	39.55	56.00	-16.45	QP	P
7	7.0213	15.89	19.73	35.62	60.00	-24.38	QP	P
8	7.0304	2.09	19.73	21.82	50.00	-28.18	AVG	P
9	12.3224	16.29	19.75	36.04	60.00	-23.96	QP	P
10	12.3224	5.02	19.75	24.77	50.00	-25.23	AVG	P
11	20.1478	4.00	19.77	23.77	50.00	-26.23	AVG	P
12	20.4314	15.05	19.77	34.82	60.00	-25.18	QP	P

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Lish factor+ Cable loss factor + limiter factor.
- 5.Margin = Measurement Level-Limit.
- 6.The test data shows only the worst case TX 802.11b- 2412MHz.



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Erratato C63.10a-2024				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.



- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

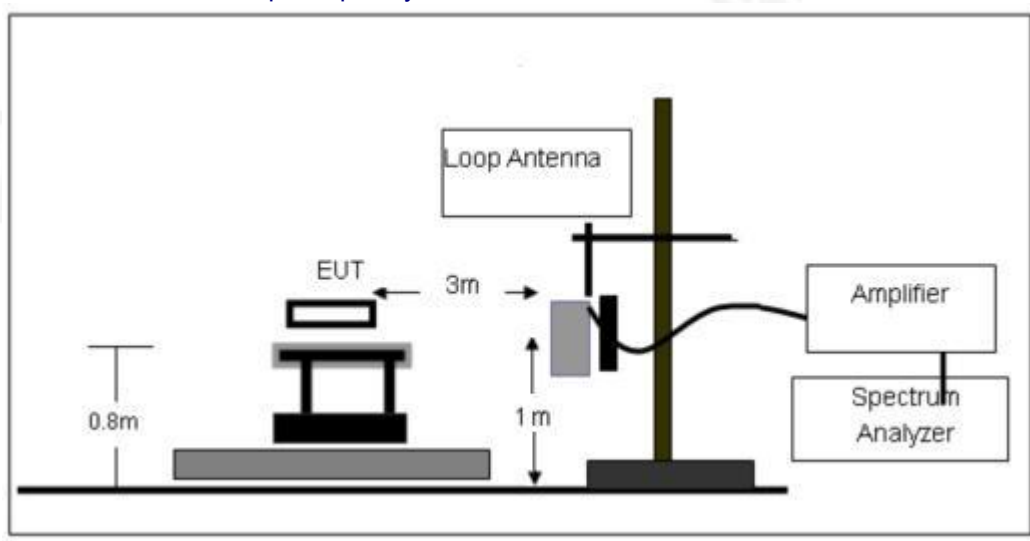




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

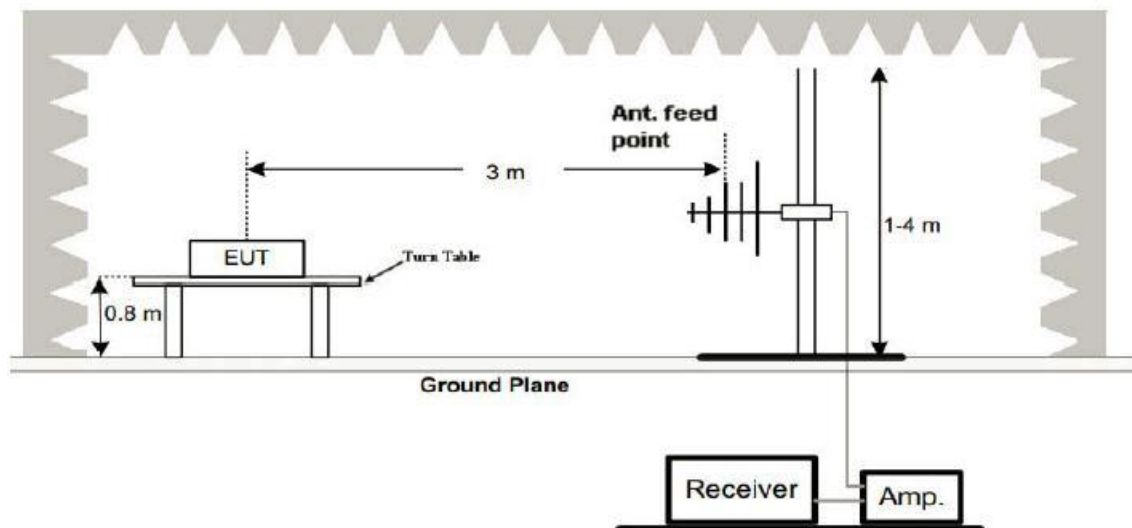

(C) Radiated Emission Test-Up Frequency Above 1GHz

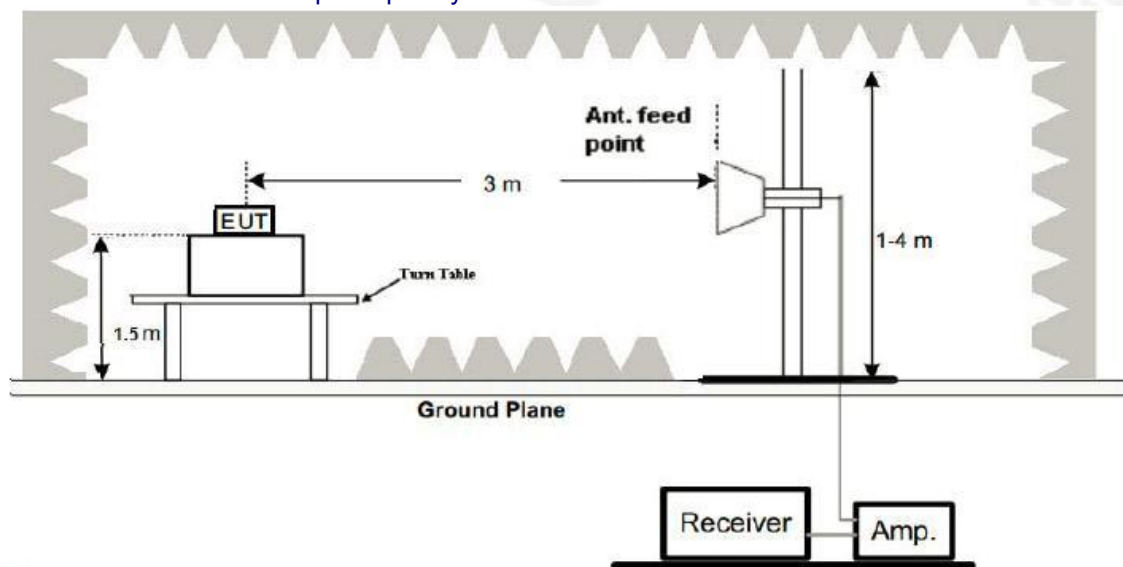

4.2.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Test Mode :	TX 802.11b- 2412MHz

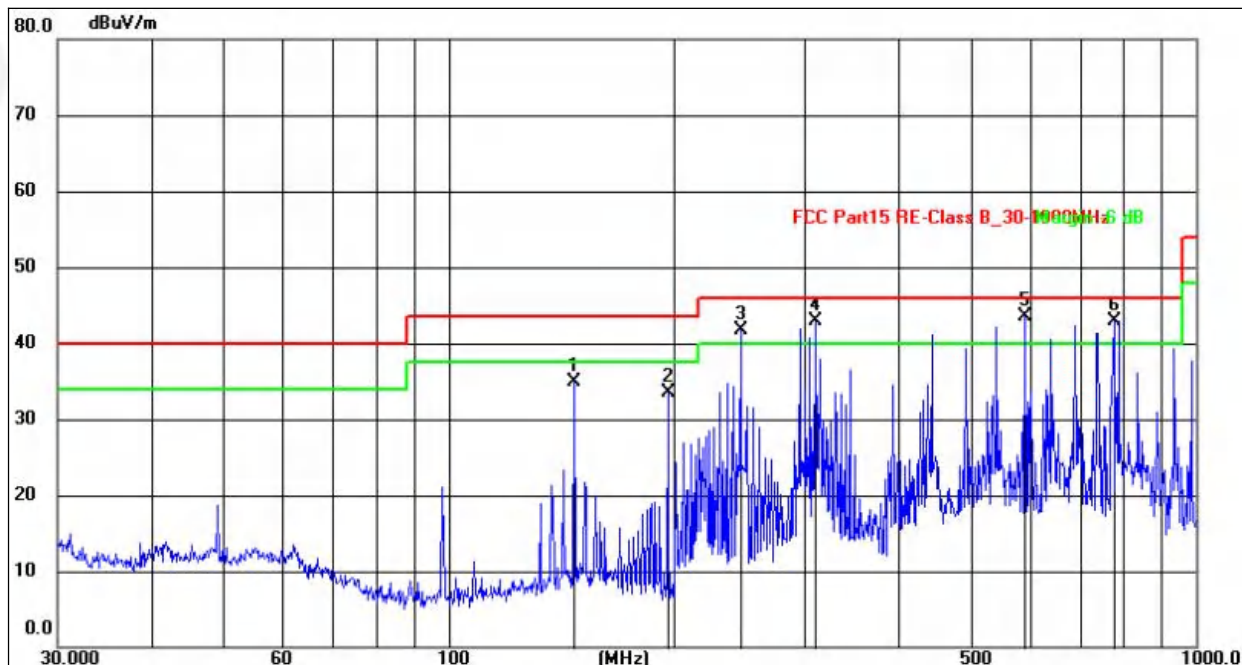


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	147.4036	53.90	-19.00	34.90	43.50	-8.60	QP
2	196.5098	55.27	-21.74	33.53	43.50	-9.97	QP
3	245.9507	61.61	-19.86	41.75	46.00	-4.25	QP
4	309.9977	64.45	-21.53	42.92	46.00	-3.08	QP
5	590.9737	57.98	-14.46	43.52	46.00	-2.48	QP
6	776.8777	55.78	-12.91	42.87	46.00	-3.13	QP

Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi - Peak measurement were performed at the frequencies with maximized peak emission.
- 3.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4.Final Level = Reading level + Correct Factor.
- 5.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 6.Margin = Measurement Level-Limit.
- 7.The test data shows only the worst case TX 802.11b- 2412MHz.



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Test Mode :	TX 802.11b- 2412MHz

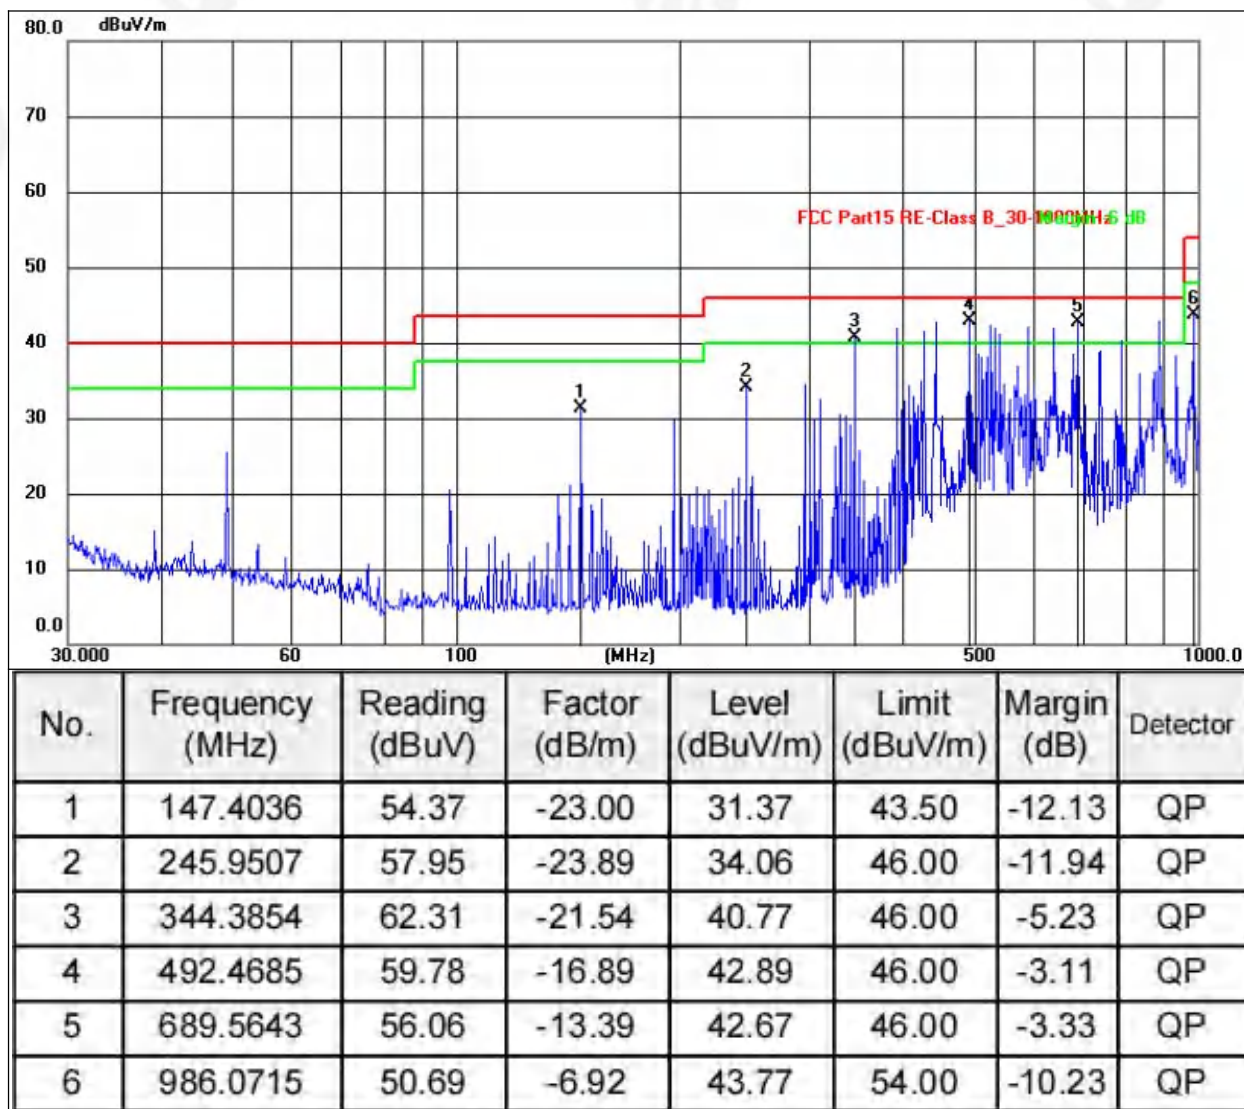

Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi - Peak measurement were performed at the frequencies with maximized peak emission.
- 3.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4.Final Level = Reading level + Correct Factor.
- 5.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 6.Margin = Measurement Level-Limit.
- 7.The test data shows only the worst case TX 802.11b- 2412MHz.



1GHz~25GHz

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	52.83	30.55	5.77	24.66	52.71	74.00	-21.29	PK
V	4824.00	43.36	30.55	5.77	24.66	43.24	54.00	-10.76	AV
V	7236.00	50.01	30.33	6.32	24.55	50.55	74.00	-23.45	PK
V	7236.00	43.75	30.33	6.32	24.55	44.29	54.00	-9.71	AV
V	9648.00	50.47	30.85	7.45	24.69	51.76	74.00	-22.24	PK
V	9648.00	43.67	30.85	7.45	24.69	44.96	54.00	-9.04	AV
V	12060.00	52.13	31.02	8.99	25.57	55.67	74.00	-18.33	PK
V	12060.00	43.41	31.02	8.99	25.57	46.95	54.00	-7.05	AV
H	4824.00	50.85	30.55	5.77	24.66	50.73	74.00	-23.27	PK
H	4824.00	43.13	30.55	5.77	24.66	43.01	54.00	-10.99	AV
H	7236.00	54.21	30.33	6.32	24.55	54.75	74.00	-19.25	PK
H	7236.00	43.04	30.33	6.32	24.55	43.58	54.00	-10.42	AV
H	9648.00	50.25	30.85	7.45	24.69	51.54	74.00	-22.46	PK
H	9648.00	43.97	30.85	7.45	24.69	45.26	54.00	-8.74	AV
H	12060.00	52.73	31.02	8.99	25.57	56.27	74.00	-17.73	PK
H	12060.00	43.31	31.02	8.99	25.57	46.85	54.00	-7.15	AV
Middle Channel:2437MHz									
V	4874.00	50.13	30.55	5.77	24.66	50.01	74.00	-23.99	PK
V	4874.00	43.30	30.55	5.77	24.66	43.18	54.00	-10.82	AV
V	7311.00	53.57	30.33	6.32	24.55	54.11	74.00	-19.89	PK
V	7311.00	43.17	30.33	6.32	24.55	43.71	54.00	-10.29	AV
V	9748.00	50.17	30.85	7.45	24.69	51.46	74.00	-22.54	PK
V	9748.00	43.46	30.85	7.45	24.69	44.75	54.00	-9.25	AV
V	12185.00	53.08	31.02	8.99	25.57	56.62	74.00	-17.38	PK
V	12185.00	43.07	31.02	8.99	25.57	46.61	54.00	-7.39	AV
H	4874.00	50.84	30.55	5.77	24.66	50.72	74.00	-23.28	PK
H	4874.00	43.55	30.55	5.77	24.66	43.43	54.00	-10.57	AV
H	7311.00	54.23	30.33	6.32	24.55	54.77	74.00	-19.23	PK
H	7311.00	43.27	30.33	6.32	24.55	43.81	54.00	-10.19	AV
H	9748.00	54.03	30.85	7.45	24.69	55.32	74.00	-18.68	PK
H	9748.00	43.18	30.85	7.45	24.69	44.47	54.00	-9.53	AV
H	12185.00	51.65	31.02	8.99	25.57	55.19	74.00	-18.81	PK
H	12185.00	43.80	31.02	8.99	25.57	47.34	54.00	-6.66	AV
High Channel:2462MHz									
V	4924.00	51.61	30.55	5.77	24.66	51.49	74.00	-22.51	PK
V	4924.00	43.22	30.55	5.77	24.66	43.10	54.00	-10.90	AV
V	7386.00	52.54	30.33	6.32	24.55	53.08	74.00	-20.92	PK
V	7386.00	43.65	30.33	6.32	24.55	44.19	54.00	-9.81	AV
V	9848.00	51.10	30.85	7.45	24.69	52.39	74.00	-21.61	PK
V	9848.00	43.93	30.85	7.45	24.69	45.22	54.00	-8.78	AV
V	12310.00	53.88	31.02	8.99	25.57	57.42	74.00	-16.58	PK



V	12310.00	43.48	31.02	8.99	25.57	47.02	54.00	-6.98	AV
H	4924.00	52.55	30.55	5.77	24.66	52.43	74.00	-21.57	PK
H	4924.00	43.28	30.55	5.77	24.66	43.16	54.00	-10.84	AV
H	7386.00	52.51	30.33	6.32	24.55	53.05	74.00	-20.95	PK
H	7386.00	43.39	30.33	6.32	24.55	43.93	54.00	-10.07	AV
H	9848.00	53.92	30.85	7.45	24.69	55.21	74.00	-18.79	PK
H	9848.00	43.50	30.85	7.45	24.69	44.79	54.00	-9.21	AV
H	12310.00	50.12	31.02	8.99	25.57	53.66	74.00	-20.34	PK
H	12310.00	43.15	31.02	8.99	25.57	46.69	54.00	-7.31	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	54.47	30.55	5.77	24.66	54.35	74.00	-19.65	PK
V	4824.00	43.47	30.55	5.77	24.66	43.35	54.00	-10.65	AV
V	7236.00	51.12	30.33	6.32	24.55	51.66	74.00	-22.34	PK
V	7236.00	43.08	30.33	6.32	24.55	43.62	54.00	-10.38	AV
V	9648.00	54.99	30.85	7.45	24.69	56.28	74.00	-17.72	PK
V	9648.00	43.45	30.85	7.45	24.69	44.74	54.00	-9.26	AV
V	12060.00	54.55	31.02	8.99	25.57	58.09	74.00	-15.91	PK
V	12060.00	43.72	31.02	8.99	25.57	47.26	54.00	-6.74	AV
H	4824.00	50.01	30.55	5.77	24.66	49.89	74.00	-24.11	PK
H	4824.00	43.65	30.55	5.77	24.66	43.53	54.00	-10.47	AV
H	7236.00	50.77	30.33	6.32	24.55	51.31	74.00	-22.69	PK
H	7236.00	43.51	30.33	6.32	24.55	44.05	54.00	-9.95	AV
H	9648.00	54.60	30.85	7.45	24.69	55.89	74.00	-18.11	PK
H	9648.00	43.45	30.85	7.45	24.69	44.74	54.00	-9.26	AV
H	12060.00	50.19	31.02	8.99	25.57	53.73	74.00	-20.27	PK
H	12060.00	43.44	31.02	8.99	25.57	46.98	54.00	-7.02	AV
Middle Channel:2437MHz									
V	4874.00	52.62	30.55	5.77	24.66	52.50	74.00	-21.50	PK
V	4874.00	43.43	30.55	5.77	24.66	43.31	54.00	-10.69	AV
V	7311.00	52.98	30.33	6.32	24.55	53.52	74.00	-20.48	PK
V	7311.00	43.55	30.33	6.32	24.55	44.09	54.00	-9.91	AV
V	9748.00	51.36	30.85	7.45	24.69	52.65	74.00	-21.35	PK
V	9748.00	43.74	30.85	7.45	24.69	45.03	54.00	-8.97	AV
V	12185.00	52.77	31.02	8.99	25.57	56.31	74.00	-17.69	PK
V	12185.00	43.52	31.02	8.99	25.57	47.06	54.00	-6.94	AV
H	4874.00	52.13	30.55	5.77	24.66	52.01	74.00	-21.99	PK
H	4874.00	43.96	30.55	5.77	24.66	43.84	54.00	-10.16	AV
H	7311.00	52.93	30.33	6.32	24.55	53.47	74.00	-20.53	PK
H	7311.00	43.78	30.33	6.32	24.55	44.32	54.00	-9.68	AV
H	9748.00	51.91	30.85	7.45	24.69	53.20	74.00	-20.80	PK
H	9748.00	43.71	30.85	7.45	24.69	45.00	54.00	-9.00	AV
H	12185.00	53.23	31.02	8.99	25.57	56.77	74.00	-17.23	PK
H	12185.00	43.46	31.02	8.99	25.57	47.00	54.00	-7.00	AV
High Channel:2462MHz									
V	4924.00	52.73	30.55	5.77	24.66	52.61	74.00	-21.39	PK
V	4924.00	43.67	30.55	5.77	24.66	43.55	54.00	-10.45	AV
V	7386.00	53.99	30.33	6.32	24.55	54.53	74.00	-19.47	PK
V	7386.00	43.56	30.33	6.32	24.55	44.10	54.00	-9.90	AV
V	9848.00	52.68	30.85	7.45	24.69	53.97	74.00	-20.03	PK
V	9848.00	43.04	30.85	7.45	24.69	44.33	54.00	-9.67	AV
V	12310.00	53.11	31.02	8.99	25.57	56.65	74.00	-17.35	PK
V	12310.00	43.39	31.02	8.99	25.57	46.93	54.00	-7.07	AV



H	4924.00	53.81	30.55	5.77	24.66	53.69	74.00	-20.31	PK
H	4924.00	43.88	30.55	5.77	24.66	43.76	54.00	-10.24	AV
H	7386.00	51.52	30.33	6.32	24.55	52.06	74.00	-21.94	PK
H	7386.00	43.03	30.33	6.32	24.55	43.57	54.00	-10.43	AV
H	9848.00	50.36	30.85	7.45	24.69	51.65	74.00	-22.35	PK
H	9848.00	43.18	30.85	7.45	24.69	44.47	54.00	-9.53	AV
H	12310.00	53.97	31.02	8.99	25.57	57.51	74.00	-16.49	PK
H	12310.00	43.80	31.02	8.99	25.57	47.34	54.00	-6.66	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	50.48	30.55	5.77	24.66	50.36	74.00	-23.64	PK
V	4824.00	43.49	30.55	5.77	24.66	43.37	54.00	-10.63	AV
V	7236.00	53.04	30.33	6.32	24.55	53.58	74.00	-20.42	PK
V	7236.00	43.60	30.33	6.32	24.55	44.14	54.00	-9.86	AV
V	9648.00	51.59	30.85	7.45	24.69	52.88	74.00	-21.12	PK
V	9648.00	43.38	30.85	7.45	24.69	44.67	54.00	-9.33	AV
V	12060.00	52.02	31.02	8.99	25.57	55.56	74.00	-18.44	PK
V	12060.00	43.19	31.02	8.99	25.57	46.73	54.00	-7.27	AV
H	4824.00	52.82	30.55	5.77	24.66	52.70	74.00	-21.30	PK
H	4824.00	43.96	30.55	5.77	24.66	43.84	54.00	-10.16	AV
H	7236.00	50.47	30.33	6.32	24.55	51.01	74.00	-22.99	PK
H	7236.00	43.81	30.33	6.32	24.55	44.35	54.00	-9.65	AV
H	9648.00	53.85	30.85	7.45	24.69	55.14	74.00	-18.86	PK
H	9648.00	43.97	30.85	7.45	24.69	45.26	54.00	-8.74	AV
H	12060.00	52.08	31.02	8.99	25.57	55.62	74.00	-18.38	PK
H	12060.00	43.83	31.02	8.99	25.57	47.37	54.00	-6.63	AV
Middle Channel:2437MHz									
V	4874.00	52.37	30.55	5.77	24.66	52.25	74.00	-21.75	PK
V	4874.00	43.61	30.55	5.77	24.66	43.49	54.00	-10.51	AV
V	7311.00	54.87	30.33	6.32	24.55	55.41	74.00	-18.59	PK
V	7311.00	43.63	30.33	6.32	24.55	44.17	54.00	-9.83	AV
V	9748.00	52.75	30.85	7.45	24.69	54.04	74.00	-19.96	PK
V	9748.00	43.73	30.85	7.45	24.69	45.02	54.00	-8.98	AV
V	12185.00	54.13	31.02	8.99	25.57	57.67	74.00	-16.33	PK
V	12185.00	43.65	31.02	8.99	25.57	47.19	54.00	-6.81	AV
H	4874.00	52.43	30.55	5.77	24.66	52.31	74.00	-21.69	PK
H	4874.00	43.45	30.55	5.77	24.66	43.33	54.00	-10.67	AV
H	7311.00	51.79	30.33	6.32	24.55	52.33	74.00	-21.67	PK
H	7311.00	43.49	30.33	6.32	24.55	44.03	54.00	-9.97	AV
H	9748.00	51.26	30.85	7.45	24.69	52.55	74.00	-21.45	PK
H	9748.00	43.20	30.85	7.45	24.69	44.49	54.00	-9.51	AV
H	12185.00	51.57	31.02	8.99	25.57	55.11	74.00	-18.89	PK
H	12185.00	43.04	31.02	8.99	25.57	46.58	54.00	-7.42	AV
High Channel:2462MHz									
V	4924.00	54.82	30.55	5.77	24.66	54.70	74.00	-19.30	PK
V	4924.00	43.22	30.55	5.77	24.66	43.10	54.00	-10.90	AV
V	7386.00	54.95	30.33	6.32	24.55	55.49	74.00	-18.51	PK
V	7386.00	43.70	30.33	6.32	24.55	44.24	54.00	-9.76	AV
V	9848.00	51.25	30.85	7.45	24.69	52.54	74.00	-21.46	PK
V	9848.00	43.70	30.85	7.45	24.69	44.99	54.00	-9.01	AV
V	12310.00	52.16	31.02	8.99	25.57	55.70	74.00	-18.30	PK
V	12310.00	43.21	31.02	8.99	25.57	46.75	54.00	-7.25	AV



H	4924.00	51.67	30.55	5.77	24.66	51.55	74.00	-22.45	PK
H	4924.00	43.92	30.55	5.77	24.66	43.80	54.00	-10.20	AV
H	7386.00	52.83	30.33	6.32	24.55	53.37	74.00	-20.63	PK
H	7386.00	43.11	30.33	6.32	24.55	43.65	54.00	-10.35	AV
H	9848.00	53.86	30.85	7.45	24.69	55.15	74.00	-18.85	PK
H	9848.00	43.15	30.85	7.45	24.69	44.44	54.00	-9.56	AV
H	12310.00	54.65	31.02	8.99	25.57	58.19	74.00	-15.81	PK
H	12310.00	43.59	31.02	8.99	25.57	47.13	54.00	-6.87	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n40

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2422MHz									
V	4844.00	51.94	30.55	5.77	24.66	51.82	74.00	-22.18	PK
V	4844.00	43.98	30.55	5.77	24.66	43.86	54.00	-10.14	AV
V	7266.00	50.42	30.33	6.32	24.55	50.96	74.00	-23.04	PK
V	7266.00	43.56	30.33	6.32	24.55	44.10	54.00	-9.90	AV
V	9688.00	50.11	30.85	7.45	24.69	51.40	74.00	-22.60	PK
V	9688.00	43.78	30.85	7.45	24.69	45.07	54.00	-8.93	AV
V	12110.00	54.93	31.02	8.99	25.57	58.47	74.00	-15.53	PK
V	12110.00	43.57	31.02	8.99	25.57	47.11	54.00	-6.89	AV
H	4844.00	50.07	30.55	5.77	24.66	49.95	74.00	-24.05	PK
H	4844.00	43.62	30.55	5.77	24.66	43.50	54.00	-10.50	AV
H	7266.00	54.93	30.33	6.32	24.55	55.47	74.00	-18.53	PK
H	7266.00	43.21	30.33	6.32	24.55	43.75	54.00	-10.25	AV
H	9688.00	50.71	30.85	7.45	24.69	52.00	74.00	-22.00	PK
H	9688.00	43.18	30.85	7.45	24.69	44.47	54.00	-9.53	AV
H	12110.00	53.04	31.02	8.99	25.57	56.58	74.00	-17.42	PK
H	12110.00	43.44	31.02	8.99	25.57	46.98	54.00	-7.02	AV
Middle Channel:2437MHz									
V	4874.00	54.25	30.55	5.77	24.66	54.13	74.00	-19.87	PK
V	4874.00	43.56	30.55	5.77	24.66	43.44	54.00	-10.56	AV
V	7311.00	51.49	30.33	6.32	24.55	52.03	74.00	-21.97	PK
V	7311.00	43.38	30.33	6.32	24.55	43.92	54.00	-10.08	AV
V	9748.00	53.62	30.85	7.45	24.69	54.91	74.00	-19.09	PK
V	9748.00	43.08	30.85	7.45	24.69	44.37	54.00	-9.63	AV
V	12185.00	53.03	31.02	8.99	25.57	56.57	74.00	-17.43	PK
V	12185.00	43.06	31.02	8.99	25.57	46.60	54.00	-7.40	AV
H	4874.00	50.64	30.55	5.77	24.66	50.52	74.00	-23.48	PK
H	4874.00	43.10	30.55	5.77	24.66	42.98	54.00	-11.02	AV
H	7311.00	51.92	30.33	6.32	24.55	52.46	74.00	-21.54	PK
H	7311.00	43.95	30.33	6.32	24.55	44.49	54.00	-9.51	AV
H	9748.00	52.93	30.85	7.45	24.69	54.22	74.00	-19.78	PK
H	9748.00	43.28	30.85	7.45	24.69	44.57	54.00	-9.43	AV
H	12185.00	53.91	31.02	8.99	25.57	57.45	74.00	-16.55	PK
H	12185.00	43.40	31.02	8.99	25.57	46.94	54.00	-7.06	AV
High Channel:2452MHz									
V	4904.00	53.74	30.55	5.77	24.66	53.62	74.00	-20.38	PK
V	4904.00	43.53	30.55	5.77	24.66	43.41	54.00	-10.59	AV
V	7356.00	53.83	30.33	6.32	24.55	54.37	74.00	-19.63	PK
V	7356.00	43.54	30.33	6.32	24.55	44.08	54.00	-9.92	AV
V	9808.00	52.46	30.85	7.45	24.69	53.75	74.00	-20.25	PK
V	9808.00	43.57	30.85	7.45	24.69	44.86	54.00	-9.14	AV
V	12260.00	54.55	31.02	8.99	25.57	58.09	74.00	-15.91	PK
V	12260.00	43.81	31.02	8.99	25.57	47.35	54.00	-6.65	AV



H	4904.00	51.03	30.55	5.77	24.66	50.91	74.00	-23.09	PK
H	4904.00	43.56	30.55	5.77	24.66	43.44	54.00	-10.56	AV
H	7356.00	51.52	30.33	6.32	24.55	52.06	74.00	-21.94	PK
H	7356.00	43.75	30.33	6.32	24.55	44.29	54.00	-9.71	AV
H	9808.00	52.29	30.85	7.45	24.69	53.58	74.00	-20.42	PK
H	9808.00	43.86	30.85	7.45	24.69	45.15	54.00	-8.85	AV
H	12260.00	50.82	31.02	8.99	25.57	54.36	74.00	-19.64	PK
H	12260.00	43.87	31.02	8.99	25.57	47.41	54.00	-6.59	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ax20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	52.16	30.55	5.77	24.66	52.04	74.00	-21.96	PK
V	4824.00	43.88	30.55	5.77	24.66	43.76	54.00	-10.24	AV
V	7236.00	54.77	30.33	6.32	24.55	55.31	74.00	-18.69	PK
V	7236.00	43.20	30.33	6.32	24.55	43.74	54.00	-10.26	AV
V	9648.00	52.99	30.85	7.45	24.69	54.28	74.00	-19.72	PK
V	9648.00	43.95	30.85	7.45	24.69	45.24	54.00	-8.76	AV
V	12060.00	52.18	31.02	8.99	25.57	55.72	74.00	-18.28	PK
V	12060.00	43.78	31.02	8.99	25.57	47.32	54.00	-6.68	AV
H	4824.00	50.39	30.55	5.77	24.66	50.27	74.00	-23.73	PK
H	4824.00	43.84	30.55	5.77	24.66	43.72	54.00	-10.28	AV
H	7236.00	51.70	30.33	6.32	24.55	52.24	74.00	-21.76	PK
H	7236.00	43.04	30.33	6.32	24.55	43.58	54.00	-10.42	AV
H	9648.00	54.01	30.85	7.45	24.69	55.30	74.00	-18.70	PK
H	9648.00	43.92	30.85	7.45	24.69	45.21	54.00	-8.79	AV
H	12060.00	50.17	31.02	8.99	25.57	53.71	74.00	-20.29	PK
H	12060.00	43.27	31.02	8.99	25.57	46.81	54.00	-7.19	AV
Middle Channel:2437MHz									
V	4874.00	51.07	30.55	5.77	24.66	50.95	74.00	-23.05	PK
V	4874.00	43.19	30.55	5.77	24.66	43.07	54.00	-10.93	AV
V	7311.00	54.70	30.33	6.32	24.55	55.24	74.00	-18.76	PK
V	7311.00	43.16	30.33	6.32	24.55	43.70	54.00	-10.30	AV
V	9748.00	52.98	30.85	7.45	24.69	54.27	74.00	-19.73	PK
V	9748.00	43.60	30.85	7.45	24.69	44.89	54.00	-9.11	AV
V	12185.00	50.83	31.02	8.99	25.57	54.37	74.00	-19.63	PK
V	12185.00	43.81	31.02	8.99	25.57	47.35	54.00	-6.65	AV
H	4874.00	50.06	30.55	5.77	24.66	49.94	74.00	-24.06	PK
H	4874.00	43.52	30.55	5.77	24.66	43.40	54.00	-10.60	AV
H	7311.00	53.65	30.33	6.32	24.55	54.19	74.00	-19.81	PK
H	7311.00	43.56	30.33	6.32	24.55	44.10	54.00	-9.90	AV
H	9748.00	51.33	30.85	7.45	24.69	52.62	74.00	-21.38	PK
H	9748.00	43.03	30.85	7.45	24.69	44.32	54.00	-9.68	AV
H	12185.00	50.85	31.02	8.99	25.57	54.39	74.00	-19.61	PK
H	12185.00	43.71	31.02	8.99	25.57	47.25	54.00	-6.75	AV
High Channel:2462MHz									
V	4924.00	52.44	30.55	5.77	24.66	52.32	74.00	-21.68	PK
V	4924.00	43.69	30.55	5.77	24.66	43.57	54.00	-10.43	AV
V	7386.00	50.38	30.33	6.32	24.55	50.92	74.00	-23.08	PK
V	7386.00	43.67	30.33	6.32	24.55	44.21	54.00	-9.79	AV
V	9848.00	51.14	30.85	7.45	24.69	52.43	74.00	-21.57	PK
V	9848.00	43.21	30.85	7.45	24.69	44.50	54.00	-9.50	AV
V	12310.00	50.19	31.02	8.99	25.57	53.73	74.00	-20.27	PK
V	12310.00	43.13	31.02	8.99	25.57	46.67	54.00	-7.33	AV



H	4924.00	53.88	30.55	5.77	24.66	53.76	74.00	-20.24	PK
H	4924.00	43.30	30.55	5.77	24.66	43.18	54.00	-10.82	AV
H	7386.00	52.65	30.33	6.32	24.55	53.19	74.00	-20.81	PK
H	7386.00	43.88	30.33	6.32	24.55	44.42	54.00	-9.58	AV
H	9848.00	50.02	30.85	7.45	24.69	51.31	74.00	-22.69	PK
H	9848.00	43.03	30.85	7.45	24.69	44.32	54.00	-9.68	AV
H	12310.00	51.90	31.02	8.99	25.57	55.44	74.00	-18.56	PK
H	12310.00	43.67	31.02	8.99	25.57	47.21	54.00	-6.79	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ax40

Polar (H/V)	Frequency	Meter Reading	Pre-am plifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2422MHz									
V	4844.00	54.73	30.55	5.77	24.66	54.61	74.00	-19.39	PK
V	4844.00	43.50	30.55	5.77	24.66	43.38	54.00	-10.62	AV
V	7266.00	53.62	30.33	6.32	24.55	54.16	74.00	-19.84	PK
V	7266.00	43.17	30.33	6.32	24.55	43.71	54.00	-10.29	AV
V	9688.00	54.06	30.85	7.45	24.69	55.35	74.00	-18.65	PK
V	9688.00	43.92	30.85	7.45	24.69	45.21	54.00	-8.79	AV
V	12110.00	53.47	31.02	8.99	25.57	57.01	74.00	-16.99	PK
V	12110.00	43.44	31.02	8.99	25.57	46.98	54.00	-7.02	AV
H	4844.00	51.69	30.55	5.77	24.66	51.57	74.00	-22.43	PK
H	4844.00	43.49	30.55	5.77	24.66	43.37	54.00	-10.63	AV
H	7266.00	52.34	30.33	6.32	24.55	52.88	74.00	-21.12	PK
H	7266.00	43.43	30.33	6.32	24.55	43.97	54.00	-10.03	AV
H	9688.00	53.40	30.85	7.45	24.69	54.69	74.00	-19.31	PK
H	9688.00	43.92	30.85	7.45	24.69	45.21	54.00	-8.79	AV
H	12110.00	54.84	31.02	8.99	25.57	58.38	74.00	-15.62	PK
H	12110.00	43.46	31.02	8.99	25.57	47.00	54.00	-7.00	AV
Middle Channel:2437MHz									
V	4874.00	50.07	30.55	5.77	24.66	49.95	74.00	-24.05	PK
V	4874.00	43.93	30.55	5.77	24.66	43.81	54.00	-10.19	AV
V	7311.00	52.01	30.33	6.32	24.55	52.55	74.00	-21.45	PK
V	7311.00	43.96	30.33	6.32	24.55	44.50	54.00	-9.50	AV
V	9748.00	50.53	30.85	7.45	24.69	51.82	74.00	-22.18	PK
V	9748.00	43.94	30.85	7.45	24.69	45.23	54.00	-8.77	AV
V	12185.00	52.54	31.02	8.99	25.57	56.08	74.00	-17.92	PK
V	12185.00	43.91	31.02	8.99	25.57	47.45	54.00	-6.55	AV
H	4874.00	54.68	30.55	5.77	24.66	54.56	74.00	-19.44	PK
H	4874.00	43.78	30.55	5.77	24.66	43.66	54.00	-10.34	AV
H	7311.00	53.67	30.33	6.32	24.55	54.21	74.00	-19.79	PK
H	7311.00	43.73	30.33	6.32	24.55	44.27	54.00	-9.73	AV
H	9748.00	50.93	30.85	7.45	24.69	52.22	74.00	-21.78	PK
H	9748.00	43.44	30.85	7.45	24.69	44.73	54.00	-9.27	AV
H	12185.00	54.42	31.02	8.99	25.57	57.96	74.00	-16.04	PK
H	12185.00	43.66	31.02	8.99	25.57	47.20	54.00	-6.80	AV
High Channel:2452MHz									
V	4904.00	51.88	30.55	5.77	24.66	51.76	74.00	-22.24	PK
V	4904.00	43.31	30.55	5.77	24.66	43.19	54.00	-10.81	AV
V	7356.00	50.61	30.33	6.32	24.55	51.15	74.00	-22.85	PK
V	7356.00	43.93	30.33	6.32	24.55	44.47	54.00	-9.53	AV
V	9808.00	52.54	30.85	7.45	24.69	53.83	74.00	-20.17	PK
V	9808.00	43.85	30.85	7.45	24.69	45.14	54.00	-8.86	AV
V	12260.00	52.35	31.02	8.99	25.57	55.89	74.00	-18.11	PK
V	12260.00	43.79	31.02	8.99	25.57	47.33	54.00	-6.67	AV



H	4904.00	50.45	30.55	5.77	24.66	50.33	74.00	-23.67	PK
H	4904.00	43.75	30.55	5.77	24.66	43.63	54.00	-10.37	AV
H	7356.00	51.37	30.33	6.32	24.55	51.91	74.00	-22.09	PK
H	7356.00	43.75	30.33	6.32	24.55	44.29	54.00	-9.71	AV
H	9808.00	52.62	30.85	7.45	24.69	53.91	74.00	-20.09	PK
H	9808.00	43.54	30.85	7.45	24.69	44.83	54.00	-9.17	AV
H	12260.00	52.24	31.02	8.99	25.57	55.78	74.00	-18.22	PK
H	12260.00	43.71	31.02	8.99	25.57	47.25	54.00	-6.75	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. RADIATED BAND EMISSION MEASUREMENT

5.1 TEST REQUIREMENT

Test Requirement:	FCC Part15 C Section 15.209 and 15.205 and 15.247(d)					
Test Method:	ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Erratato C63.10a-2024					
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.					
Test site:	Measurement Distance: 3m					
Receiver setup:	Frequency	Detector	RBW	VBW	Value	
	Above	Peak	1MHz	3MHz	Peak	
	1GHz	Average	1MHz	3MHz	Average	

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	Class B (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2310MHz
Stop Frequency	2500MHz
RB / VB (emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 3MHz for Average

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
7. Test the EUT in the lowest channel, the Highest channel



Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

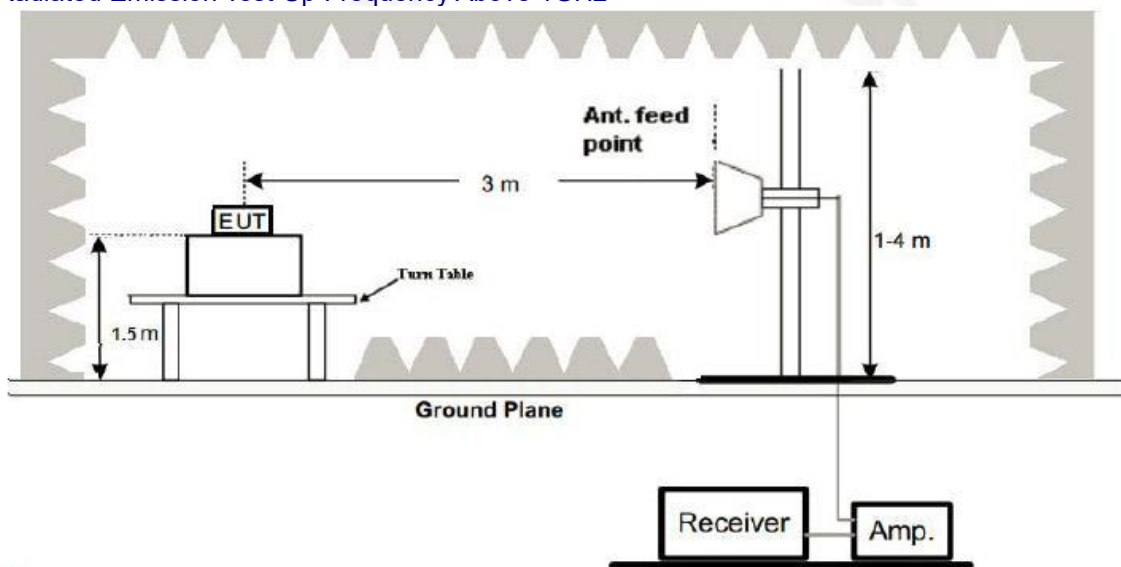

5.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



5.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBu V/m)	Margin (dB)	Dete ctor Type	Result
802.11b	LowChannel 2412MHz										
	H	2310.00	54.60	30.22	4.85	23.98	53.21	74.00	-20.79	PK	PASS
	H	2310.00	44.11	30.22	4.85	23.98	42.72	54.00	-11.28	AV	PASS
	H	2350.00	54.01	30.22	4.85	23.98	52.62	74.00	-21.38	PK	PASS
	H	2350.00	44.22	30.22	4.85	23.98	42.83	54.00	-11.17	AV	PASS
	H	2390.00	53.64	30.22	4.85	23.98	52.25	74.00	-21.75	PK	PASS
	H	2390.00	44.77	30.22	4.85	23.98	43.38	54.00	-10.62	AV	PASS
	V	2310.00	54.75	30.22	4.85	23.98	53.36	74.00	-20.64	PK	PASS
	V	2310.00	44.18	30.22	4.85	23.98	42.79	54.00	-11.21	AV	PASS
	V	2350.00	54.22	30.22	4.85	23.98	52.83	74.00	-21.17	PK	PASS
	V	2350.00	44.14	30.22	4.85	23.98	42.75	54.00	-11.25	AV	PASS
	V	2390.00	53.55	30.22	4.85	23.98	52.16	74.00	-21.84	PK	PASS
	V	2390.00	44.95	30.22	4.85	23.98	43.56	54.00	-10.44	AV	PASS
	HighChannel 2462MHz										
	H	2483.50	54.22	30.22	4.85	23.98	52.83	74.00	-21.17	PK	PASS
	H	2483.50	44.27	30.22	4.85	23.98	42.88	54.00	-11.12	AV	PASS
	H	2490.00	54.08	30.22	4.85	23.98	52.69	74.00	-21.31	PK	PASS
	H	2490.00	44.72	30.22	4.85	23.98	43.33	54.00	-10.67	AV	PASS
	H	2500.00	54.41	30.22	4.85	23.98	53.02	74.00	-20.98	PK	PASS
	H	2500.00	44.67	30.22	4.85	23.98	43.28	54.00	-10.72	AV	PASS
	V	2483.50	54.03	30.22	4.85	23.98	52.64	74.00	-21.36	PK	PASS
	V	2483.50	44.31	30.22	4.85	23.98	42.92	54.00	-11.08	AV	PASS
	V	2490.00	53.87	30.22	4.85	23.98	52.48	74.00	-21.52	PK	PASS
	V	2490.00	44.24	30.22	4.85	23.98	42.85	54.00	-11.15	AV	PASS
	V	2500.00	53.35	30.22	4.85	23.98	51.96	74.00	-22.04	PK	PASS
	V	2500.00	44.16	30.22	4.85	23.98	42.77	54.00	-11.23	AV	PASS

Remark:

Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit



	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dete ctor Type	Result
802.11g	LowChannel 2412MHz										
	H	2310.00	53.11	30.22	4.85	23.98	51.72	74.00	-22.28	PK	PASS
	H	2310.00	44.41	30.22	4.85	23.98	43.02	54.00	-10.98	AV	PASS
	H	2350.00	53.27	30.22	4.85	23.98	51.88	74.00	-22.12	PK	PASS
	H	2350.00	44.60	30.22	4.85	23.98	43.21	54.00	-10.79	AV	PASS
	H	2390.00	53.81	30.22	4.85	23.98	52.42	74.00	-21.58	PK	PASS
	H	2390.00	44.67	30.22	4.85	23.98	43.28	54.00	-10.72	AV	PASS
	V	2310.00	53.88	30.22	4.85	23.98	52.49	74.00	-21.51	PK	PASS
	V	2350.00	44.73	30.22	4.85	23.98	43.34	54.00	-10.66	AV	PASS
	V	2350.00	54.61	30.22	4.85	23.98	53.22	74.00	-20.78	PK	PASS
	V	2310.00	44.75	30.22	4.85	23.98	43.36	54.00	-10.64	AV	PASS
	V	2390.00	53.10	30.22	4.85	23.98	51.71	74.00	-22.29	PK	PASS
	V	2390.00	44.51	30.22	4.85	23.98	43.12	54.00	-10.88	AV	PASS
	High Channel 2462MHz										
	H	2483.50	53.63	30.22	4.85	23.98	52.24	74.00	-21.76	PK	PASS
	H	2483.50	44.13	30.22	4.85	23.98	42.74	54.00	-11.26	AV	PASS
	H	2490.00	53.88	30.22	4.85	23.98	52.49	74.00	-21.51	PK	PASS
	H	2490.00	44.03	30.22	4.85	23.98	42.64	54.00	-11.36	AV	PASS
	H	2500.00	54.02	30.22	4.85	23.98	52.63	74.00	-21.37	PK	PASS
	H	2500.00	44.42	30.22	4.85	23.98	43.03	54.00	-10.97	AV	PASS
	V	2483.50	54.77	30.22	4.85	23.98	53.38	74.00	-20.62	PK	PASS
	V	2483.50	44.07	30.22	4.85	23.98	42.68	54.00	-11.32	AV	PASS
	V	2490.00	53.75	30.22	4.85	23.98	52.36	74.00	-21.64	PK	PASS
	V	2490.00	44.61	30.22	4.85	23.98	43.22	54.00	-10.78	AV	PASS
	V	2500.00	53.05	30.22	4.85	23.98	51.66	74.00	-22.34	PK	PASS
	V	2500.00	44.33	30.22	4.85	23.98	42.94	54.00	-11.06	AV	PASS
Remark: Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											



	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dete ctor Type	Result
802.11 n20	LowChannel 2412MHz										
	H	2310.00	54.37	30.22	4.85	23.98	52.98	74.00	-21.02	PK	PASS
	H	2310.00	44.29	30.22	4.85	23.98	42.90	54.00	-11.10	AV	PASS
	H	2350.00	54.76	30.22	4.85	23.98	53.37	74.00	-20.63	PK	PASS
	H	2350.00	44.79	30.22	4.85	23.98	43.40	54.00	-10.60	AV	PASS
	H	2390.00	54.32	30.22	4.85	23.98	52.93	74.00	-21.07	PK	PASS
	H	2390.00	44.62	30.22	4.85	23.98	43.23	54.00	-10.77	AV	PASS
	V	2310.00	54.65	30.22	4.85	23.98	53.26	74.00	-20.74	PK	PASS
	V	2310.00	44.10	30.22	4.85	23.98	42.71	54.00	-11.29	AV	PASS
	V	2350.00	53.71	30.22	4.85	23.98	52.32	74.00	-21.68	PK	PASS
	V	2350.00	44.31	30.22	4.85	23.98	42.92	54.00	-11.08	AV	PASS
	V	2390.00	53.99	30.22	4.85	23.98	52.60	74.00	-21.40	PK	PASS
	V	2390.00	44.26	30.22	4.85	23.98	42.87	54.00	-11.13	AV	PASS
	HighChannel 2462MHz										
	H	2483.50	53.51	30.22	4.85	23.98	52.12	74.00	-21.88	PK	PASS
	H	2483.50	44.77	30.22	4.85	23.98	43.38	54.00	-10.62	AV	PASS
	H	2490.00	53.55	30.22	4.85	23.98	52.16	74.00	-21.84	PK	PASS
	H	2490.00	44.83	30.22	4.85	23.98	43.44	54.00	-10.56	AV	PASS
	H	2500.00	53.23	30.22	4.85	23.98	51.84	74.00	-22.16	PK	PASS
	H	2500.00	44.82	30.22	4.85	23.98	43.43	54.00	-10.57	AV	PASS
	V	2483.50	54.72	30.22	4.85	23.98	53.33	74.00	-20.67	PK	PASS
	V	2483.50	44.10	30.22	4.85	23.98	42.71	54.00	-11.29	AV	PASS
	V	2490.00	53.28	30.22	4.85	23.98	51.89	74.00	-22.11	PK	PASS
	V	2490.00	44.40	30.22	4.85	23.98	43.01	54.00	-10.99	AV	PASS
	V	2500.00	53.85	30.22	4.85	23.98	52.46	74.00	-21.54	PK	PASS
	V	2500.00	44.17	30.22	4.85	23.98	42.78	54.00	-11.22	AV	PASS
Remark: Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											



	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dete ctor Type	Result
802.11 n40	LowChannel 2422MHz										
	H	2310.00	54.93	30.22	4.85	23.98	53.54	74.00	-20.46	PK	PASS
	H	2310.00	44.28	30.22	4.85	23.98	42.89	54.00	-11.11	AV	PASS
	H	2350.00	53.68	30.22	4.85	23.98	52.29	74.00	-21.71	PK	PASS
	H	2350.00	44.54	30.22	4.85	23.98	43.15	54.00	-10.85	AV	PASS
	H	2390.00	53.39	30.22	4.85	23.98	52.00	74.00	-22.00	PK	PASS
	H	2390.00	44.80	30.22	4.85	23.98	43.41	54.00	-10.59	AV	PASS
	V	2310.00	54.37	30.22	4.85	23.98	52.98	74.00	-21.02	PK	PASS
	V	2310.00	44.57	30.22	4.85	23.98	43.18	54.00	-10.82	AV	PASS
	V	2350.00	54.64	30.22	4.85	23.98	53.25	74.00	-20.75	PK	PASS
	V	2350.00	44.75	30.22	4.85	23.98	43.36	54.00	-10.64	AV	PASS
	V	2390.00	54.89	30.22	4.85	23.98	53.50	74.00	-20.50	PK	PASS
	V	2390.00	44.64	30.22	4.85	23.98	43.25	54.00	-10.75	AV	PASS
	High Channel 2452MHz										
	H	2483.50	53.24	30.22	4.85	23.98	51.85	74.00	-22.15	PK	PASS
	H	2483.50	44.38	30.22	4.85	23.98	42.99	54.00	-11.01	AV	PASS
	H	2490.00	54.21	30.22	4.85	23.98	52.82	74.00	-21.18	PK	PASS
	H	2490.00	44.52	30.22	4.85	23.98	43.13	54.00	-10.87	AV	PASS
	H	2500.00	53.86	30.22	4.85	23.98	52.47	74.00	-21.53	PK	PASS
	H	2500.00	44.02	30.22	4.85	23.98	42.63	54.00	-11.37	AV	PASS
	V	2483.50	54.47	30.22	4.85	23.98	53.08	74.00	-20.92	PK	PASS
	V	2483.50	44.00	30.22	4.85	23.98	42.61	54.00	-11.39	AV	PASS
	V	2490.00	54.03	30.22	4.85	23.98	52.64	74.00	-21.36	PK	PASS
	V	2490.00	44.54	30.22	4.85	23.98	43.15	54.00	-10.85	AV	PASS
	V	2500.00	54.10	30.22	4.85	23.98	52.71	74.00	-21.29	PK	PASS
	V	2500.00	44.03	30.22	4.85	23.98	42.64	54.00	-11.36	AV	PASS
Remark: Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											



	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dete ctor Type	Result
802.11 ax20	Low Channel 2412MHz										
	H	2310.00	54.92	30.22	4.85	23.98	53.53	74.00	-20.47	PK	PASS
	H	2310.00	44.50	30.22	4.85	23.98	43.11	54.00	-10.89	AV	PASS
	H	2350.00	54.33	30.22	4.85	23.98	52.94	74.00	-21.06	PK	PASS
	H	2350.00	44.06	30.22	4.85	23.98	42.67	54.00	-11.33	AV	PASS
	H	2390.00	53.56	30.22	4.85	23.98	52.17	74.00	-21.83	PK	PASS
	H	2390.00	44.80	30.22	4.85	23.98	43.41	54.00	-10.59	AV	PASS
	V	2310.00	54.56	30.22	4.85	23.98	53.17	74.00	-20.83	PK	PASS
	V	2310.00	44.39	30.22	4.85	23.98	43.00	54.00	-11.00	AV	PASS
	V	2350.00	54.36	30.22	4.85	23.98	52.97	74.00	-21.03	PK	PASS
	V	2350.00	44.09	30.22	4.85	23.98	42.70	54.00	-11.30	AV	PASS
	V	2390.00	53.45	30.22	4.85	23.98	52.06	74.00	-21.94	PK	PASS
	V	2390.00	44.20	30.22	4.85	23.98	42.81	54.00	-11.19	AV	PASS
	High Channel 2462MHz										
	H	2483.50	54.47	30.22	4.85	23.98	53.08	74.00	-20.92	PK	PASS
	H	2483.50	44.45	30.22	4.85	23.98	43.06	54.00	-10.94	AV	PASS
	H	2490.00	54.44	30.22	4.85	23.98	53.05	74.00	-20.95	PK	PASS
	H	2490.00	44.60	30.22	4.85	23.98	43.21	54.00	-10.79	AV	PASS
	H	2500.00	54.67	30.22	4.85	23.98	53.28	74.00	-20.72	PK	PASS
	H	2500.00	44.49	30.22	4.85	23.98	43.10	54.00	-10.90	AV	PASS
	V	2483.50	54.90	30.22	4.85	23.98	53.51	74.00	-20.49	PK	PASS
	V	2483.50	44.82	30.22	4.85	23.98	43.43	54.00	-10.57	AV	PASS
	V	2490.00	53.66	30.22	4.85	23.98	52.27	74.00	-21.73	PK	PASS
	V	2490.00	44.57	30.22	4.85	23.98	43.18	54.00	-10.82	AV	PASS
	V	2500.00	53.34	30.22	4.85	23.98	51.95	74.00	-22.05	PK	PASS
	V	2500.00	44.60	30.22	4.85	23.98	43.21	54.00	-10.79	AV	PASS
Remark: Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											



	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dete ctor Type	Result
802.11 ax40	LowChannel 2422MHz										
	H	2310.00	53.34	30.22	4.85	23.98	51.95	74.00	-22.05	PK	PASS
	H	2310.00	44.13	30.22	4.85	23.98	42.74	54.00	-11.26	AV	PASS
	H	2350.00	53.95	30.22	4.85	23.98	52.56	74.00	-21.44	PK	PASS
	H	2350.00	44.21	30.22	4.85	23.98	42.82	54.00	-11.18	AV	PASS
	H	2390.00	53.05	30.22	4.85	23.98	51.66	74.00	-22.34	PK	PASS
	H	2390.00	44.31	30.22	4.85	23.98	42.92	54.00	-11.08	AV	PASS
	V	2310.00	53.39	30.22	4.85	23.98	52.00	74.00	-22.00	PK	PASS
	V	2310.00	44.69	30.22	4.85	23.98	43.30	54.00	-10.70	AV	PASS
	V	2350.00	53.59	30.22	4.85	23.98	52.20	74.00	-21.80	PK	PASS
	V	2350.00	44.13	30.22	4.85	23.98	42.74	54.00	-11.26	AV	PASS
	V	2390.00	54.80	30.22	4.85	23.98	53.41	74.00	-20.59	PK	PASS
	V	2390.00	44.94	30.22	4.85	23.98	43.55	54.00	-10.45	AV	PASS
	High Channel 2452MHz										
	H	2483.50	53.61	30.22	4.85	23.98	52.22	74.00	-21.78	PK	PASS
	H	2483.50	44.28	30.22	4.85	23.98	42.89	54.00	-11.11	AV	PASS
	H	2490.00	54.60	30.22	4.85	23.98	53.21	74.00	-20.79	PK	PASS
	H	2490.00	44.05	30.22	4.85	23.98	42.66	54.00	-11.34	AV	PASS
	H	2500.00	54.73	30.22	4.85	23.98	53.34	74.00	-20.66	PK	PASS
	H	2500.00	44.98	30.22	4.85	23.98	43.59	54.00	-10.41	AV	PASS
	V	2483.50	54.25	30.22	4.85	23.98	52.86	74.00	-21.14	PK	PASS
	V	2483.50	44.27	30.22	4.85	23.98	42.88	54.00	-11.12	AV	PASS
	V	2490.00	53.64	30.22	4.85	23.98	52.25	74.00	-21.75	PK	PASS
	V	2490.00	44.08	30.22	4.85	23.98	42.69	54.00	-11.31	AV	PASS
	V	2500.00	53.61	30.22	4.85	23.98	52.22	74.00	-21.78	PK	PASS
	V	2500.00	44.91	30.22	4.85	23.98	43.52	54.00	-10.48	AV	PASS
Remark: Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											



6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS


6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

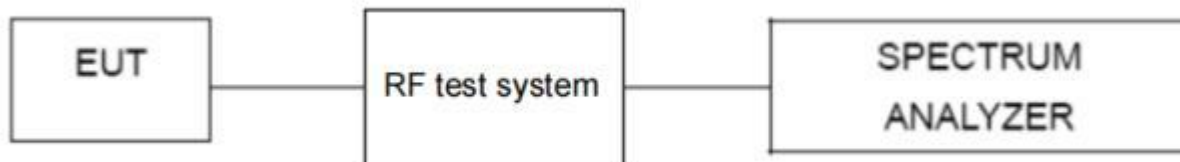

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.




6.6 TEST RESULT

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V

Test Mode	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11b	2412	-15.075	8	PASS
	2437	-16.297	8	PASS
	2462	-16.040	8	PASS
802.11g	2412	-19.780	8	PASS
	2437	-19.236	8	PASS
	2462	-19.864	8	PASS
802.11n20	2412	-20.432	8	PASS
	2437	-20.740	8	PASS
	2462	-21.312	8	PASS
802.11n40	2422	-20.877	8	PASS
	2437	-20.941	8	PASS
	2452	-21.159	8	PASS
802.11ax20	2412	-21.072	8	PASS
	2437	-21.493	8	PASS
	2462	-21.436	8	PASS
802.11ax40	2422	-22.732	8	PASS
	2437	-23.357	8	PASS
	2452	-23.103	8	PASS



802.11b - CH01

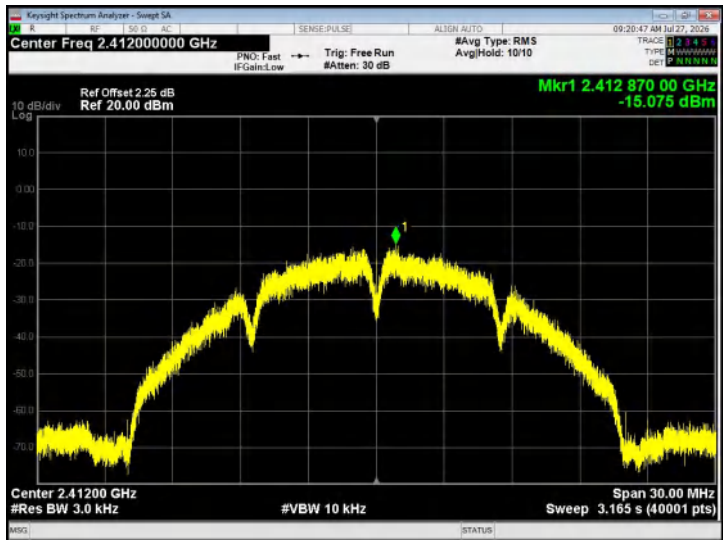

802.11b - CH06




802.11b - CH11







802.11g - CH01

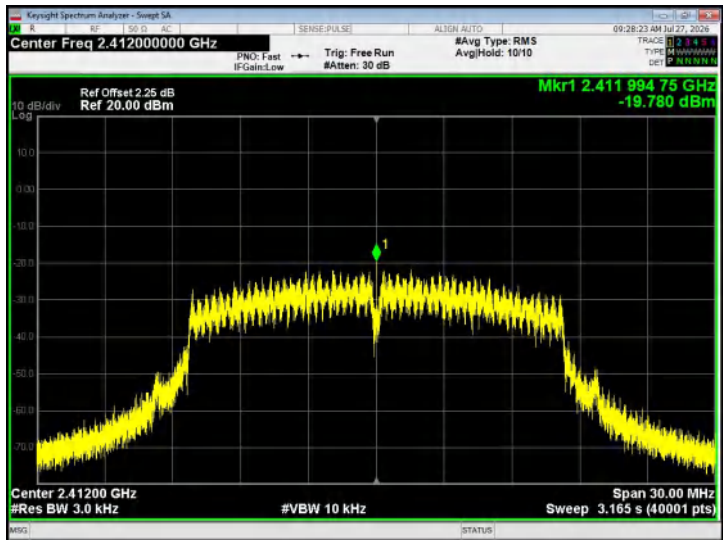

802.11g - CH06

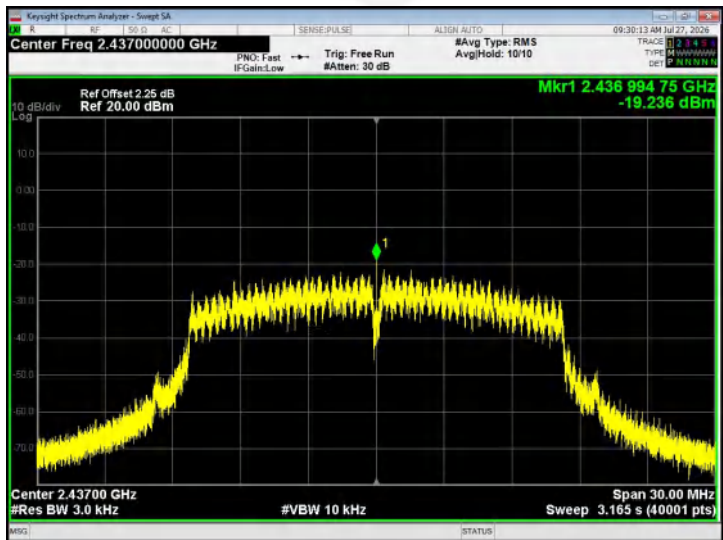


802.11g - CH11

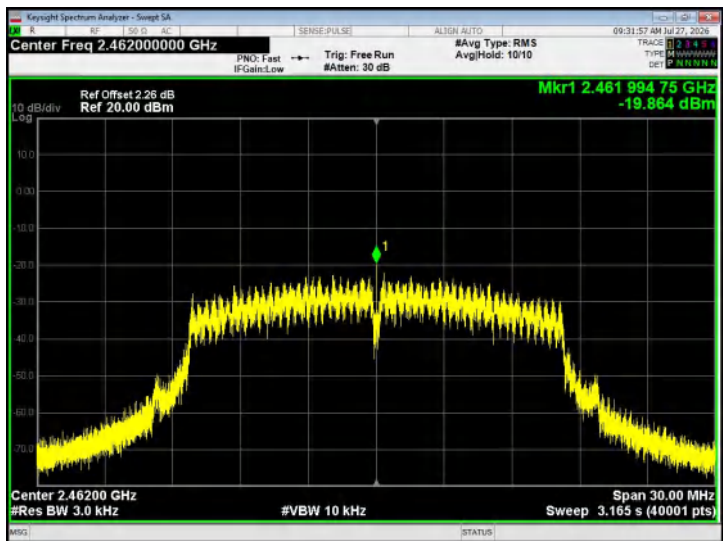





802.11n20 - CH01

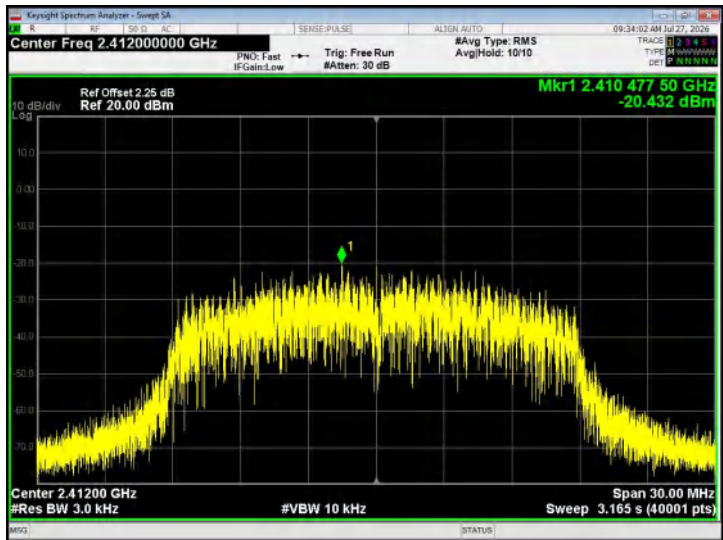

802.11n20 - CH06

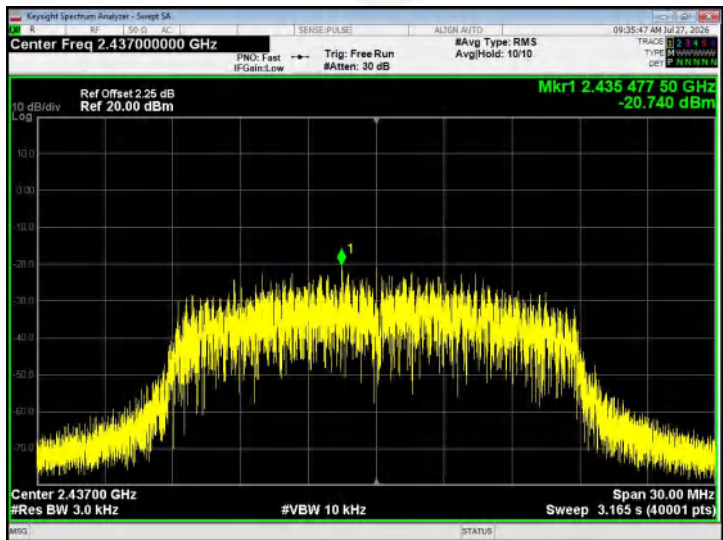


802.11n20 - CH11

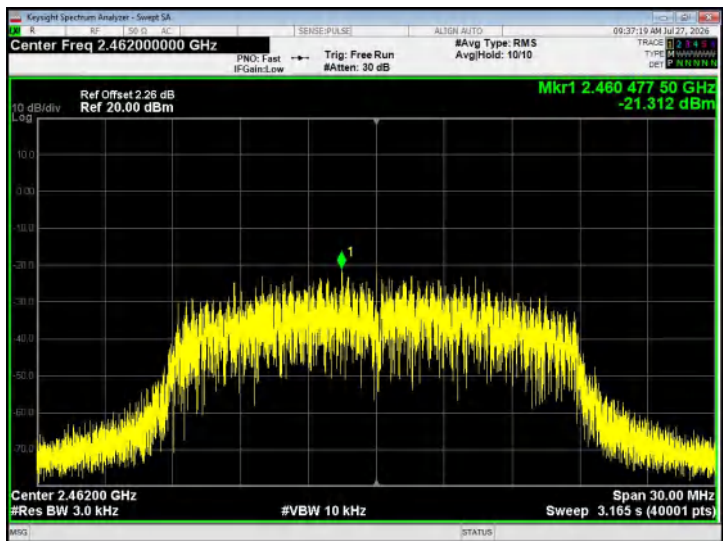





802.11n40 - CH03

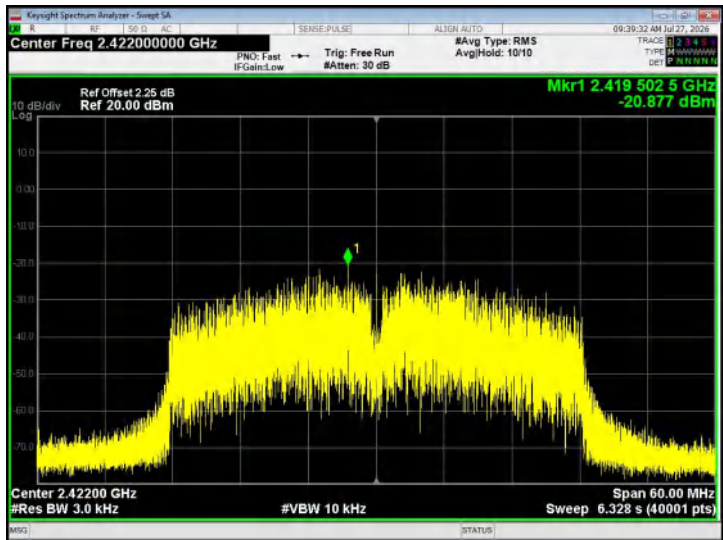

802.11n40 - CH06

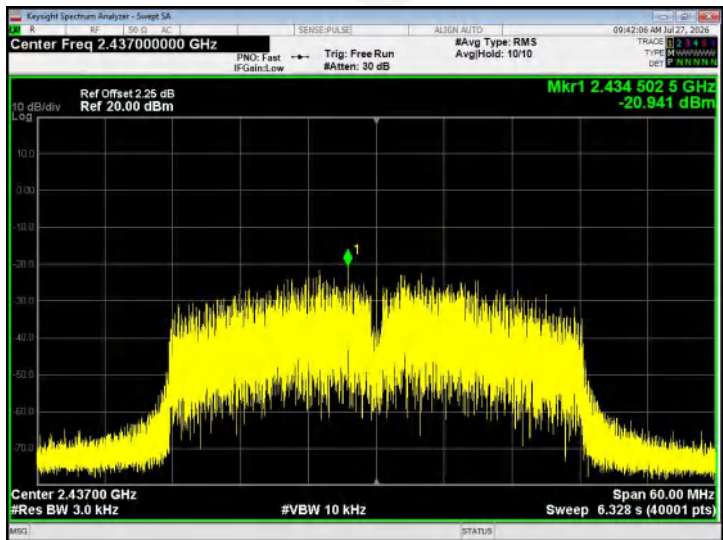


802.11n40 - CH09

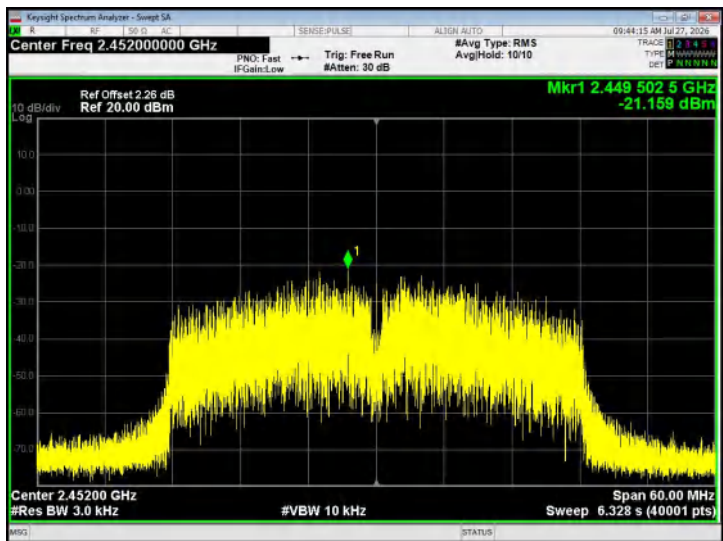





802.11ax20 - CH01

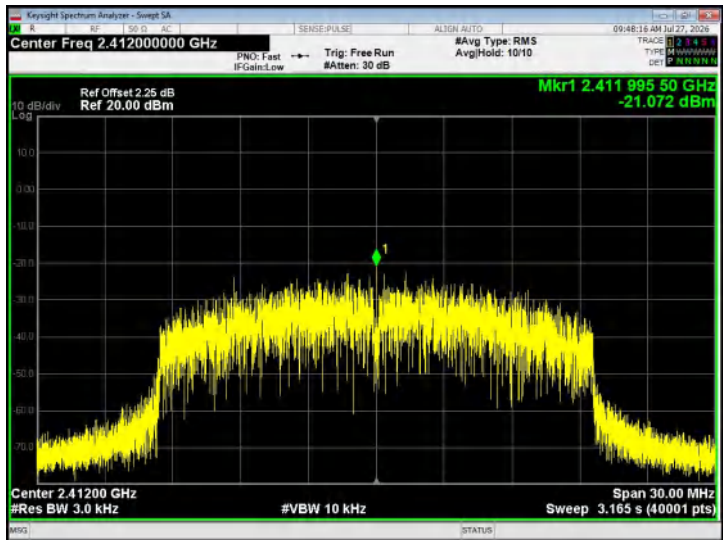

802.11ax20 - CH06

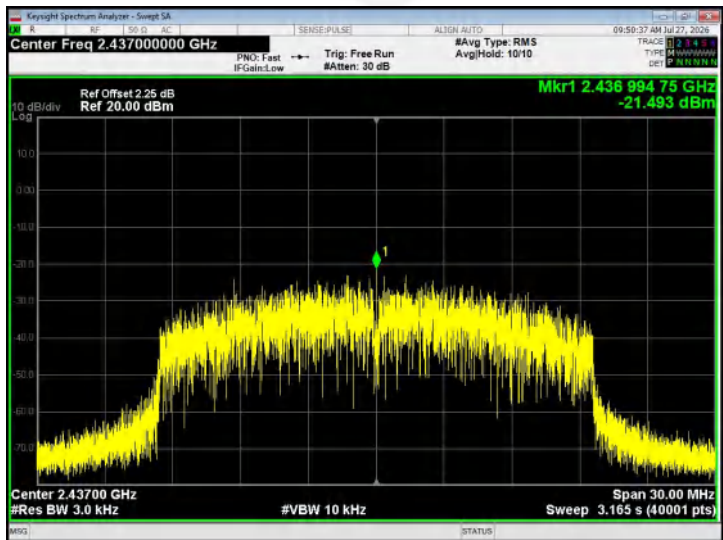


802.11ax20 - CH11

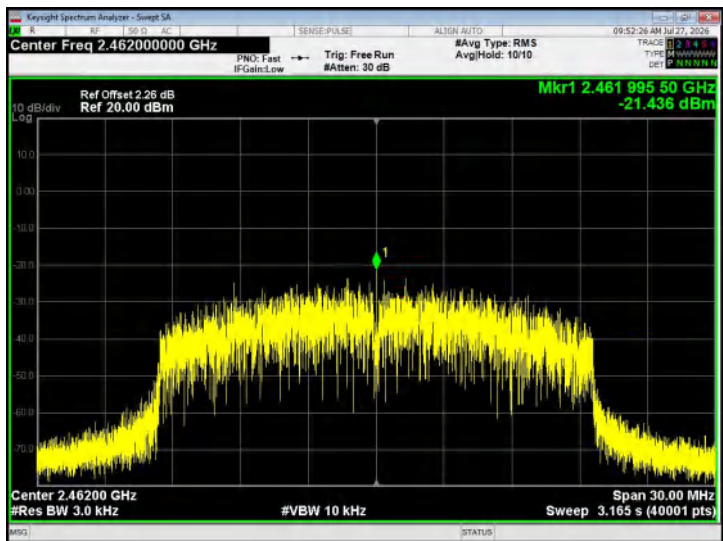





802.11ax40 - CH03

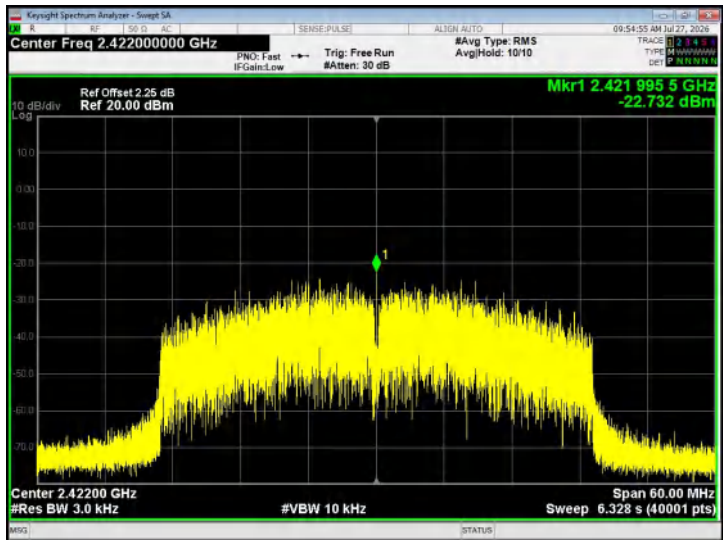

802.11ax40 - CH06

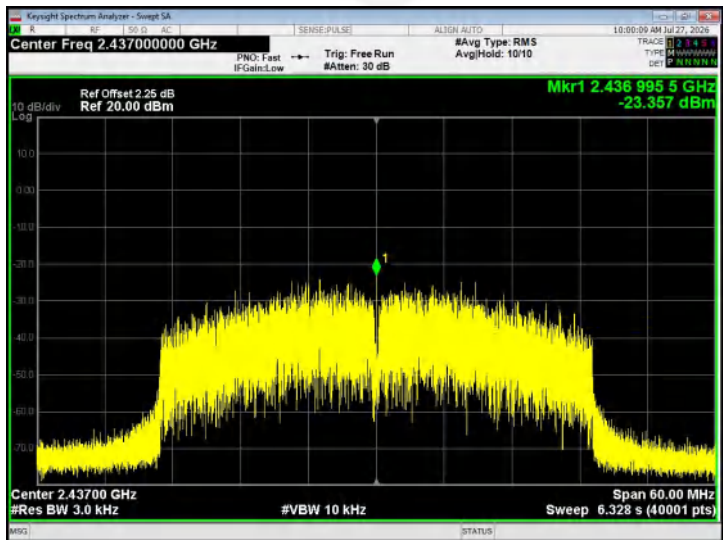

802.11ax40 - CH09

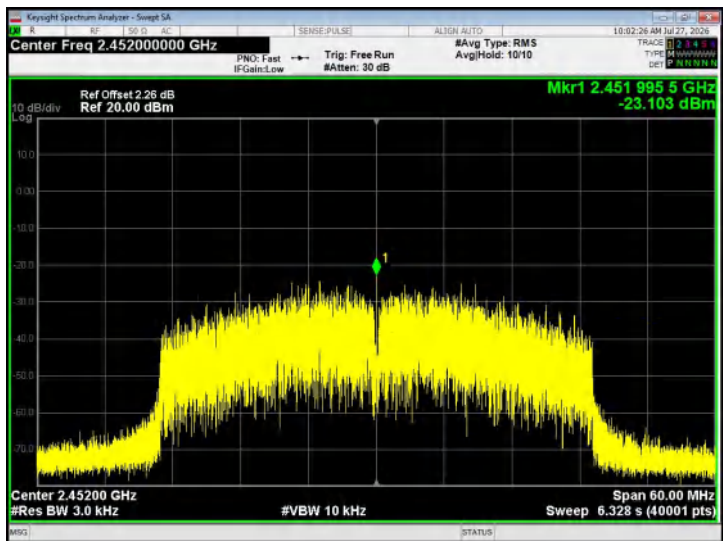



7. 6DB OCCUPIED BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB Occupied Bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

Option 1: The steps for 6dB Bandwidth are as follows:

- Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.
- Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.

Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB. Set as follows:


- Set RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.

7.3 DEVIATION FROM STANDARD

No deviation.



7.4 TEST SETUP

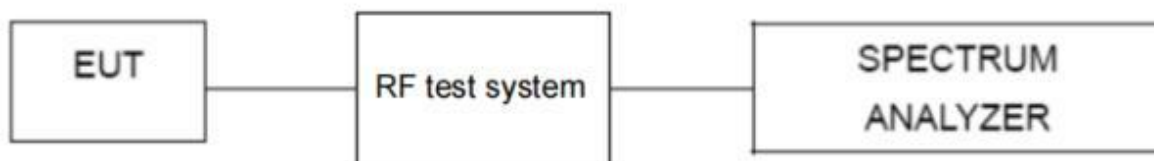

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.


7.6 TEST RESULT

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V
Test Mode :	TX		


Test Mode	Test Channel (MHz)	6dB Occupied Bandwidth (MHz)	Limit (kHz)	Result
802.11b	2412	7.245	>500	Pass
	2437	8.546		
	2462	8.530		
802.11g	2412	12.55	>500	Pass
	2437	11.39		
	2462	13.81		
802.11n20	2412	13.81	>500	Pass
	2437	13.82		
	2462	15.04		
802.11n40	2422	25.06	>500	Pass
	2437	25.05		
	2452	25.05		
802.11ax20	2412	13.81	>500	Pass
	2437	13.81		
	2462	13.81		
802.11ax40	2422	25.06	>500	Pass
	2437	25.06		
	2452	25.06		




802.11b - CH01

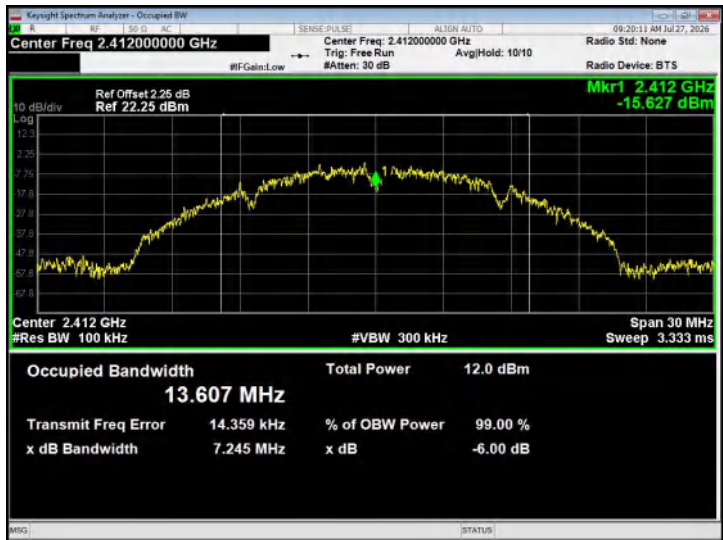

802.11b - CH06

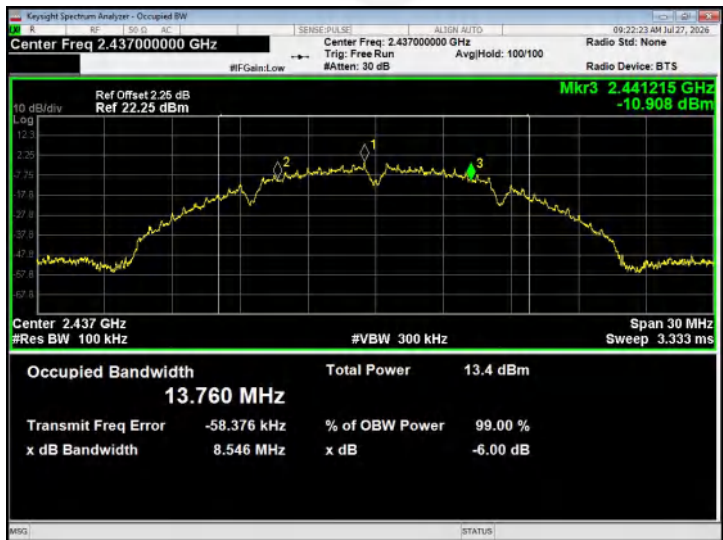


802.11b - CH11

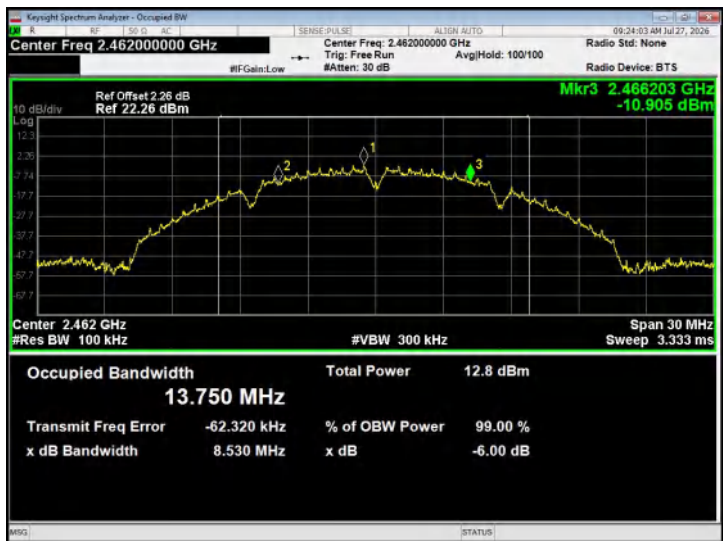




802.11g - CH01

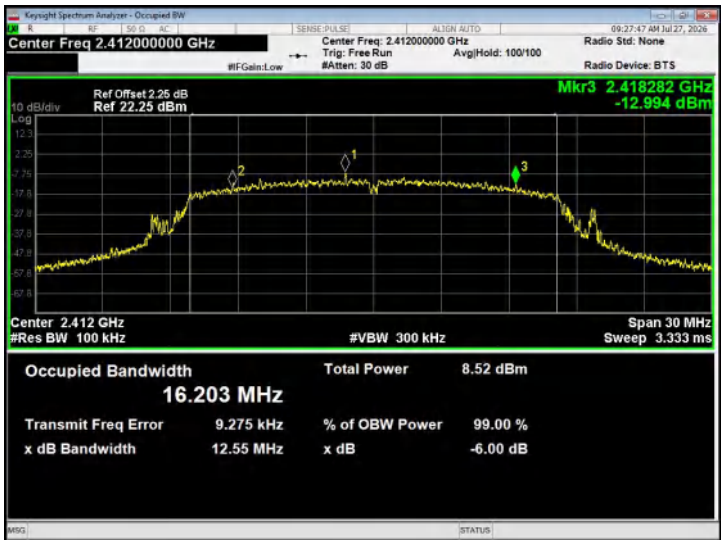

802.11g - CH06

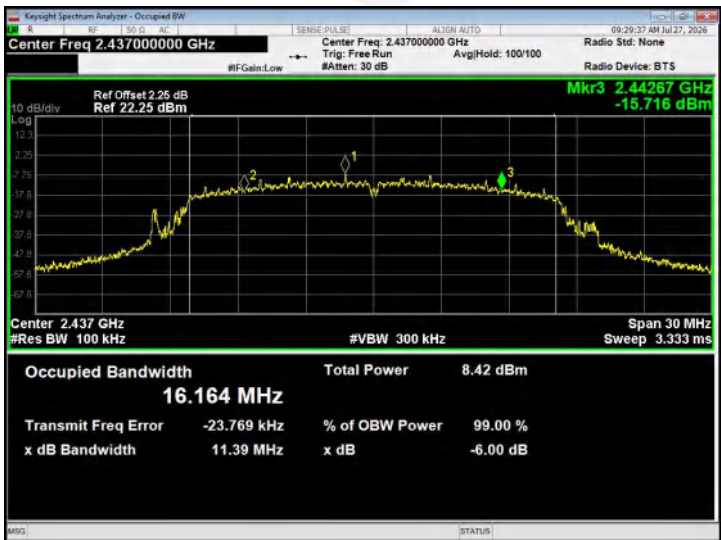


802.11g - CH11







802.11n20 - CH01

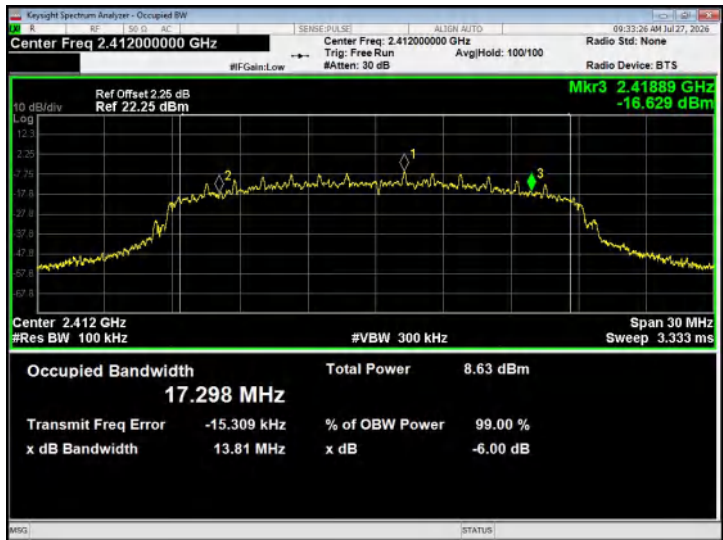

802.11n20 - CH06

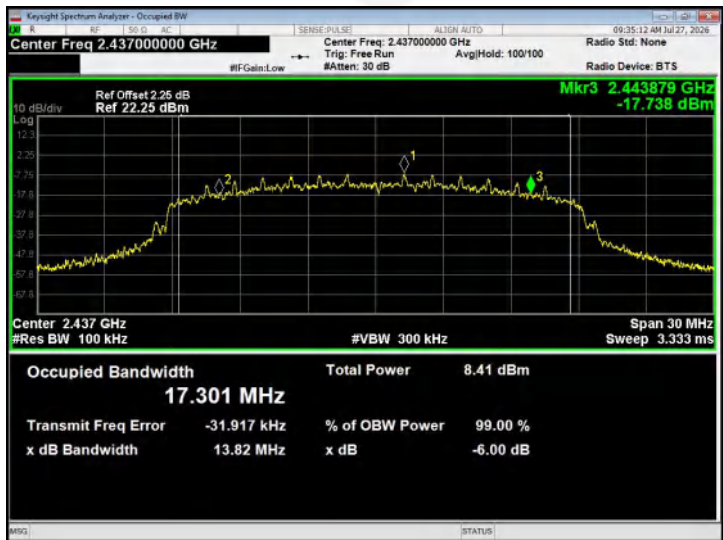


802.11n20 - CH11

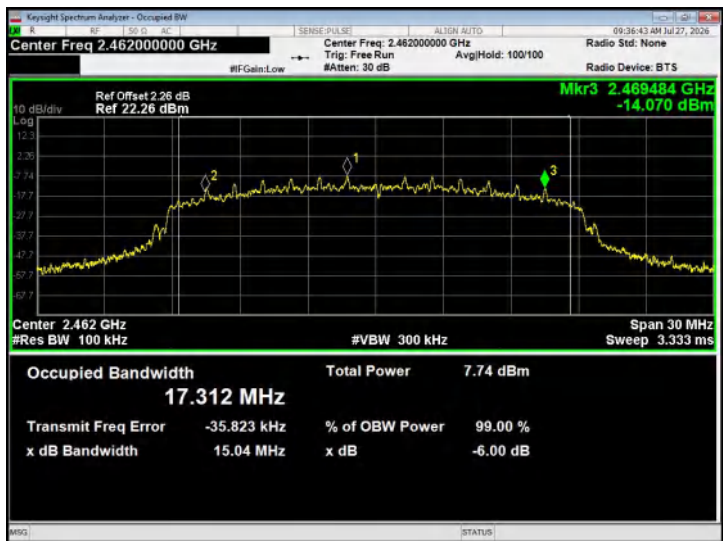




802.11n40 - CH03

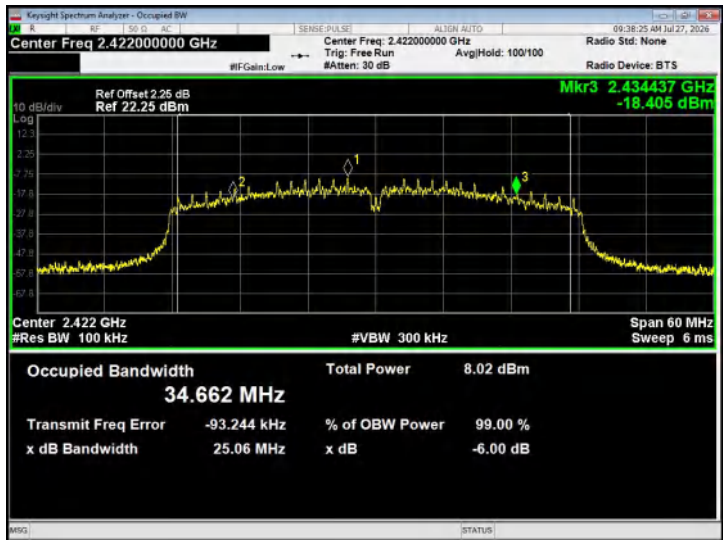

802.11n40 - CH06

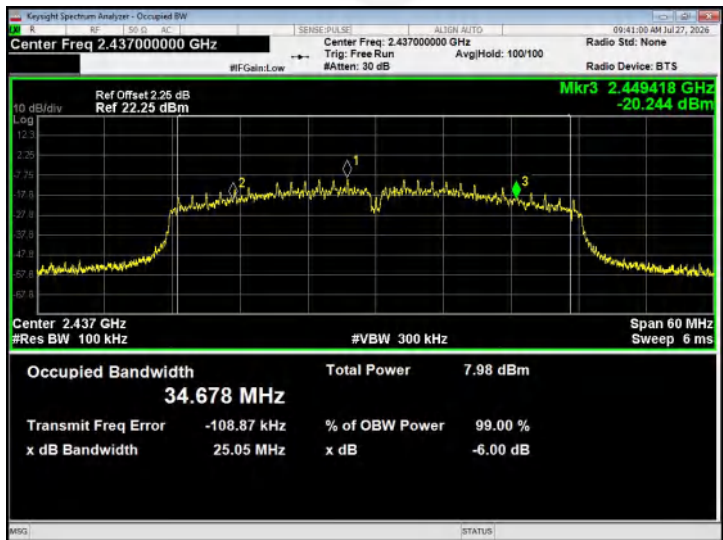


802.11n40 - CH09







802.11ax20 - CH01

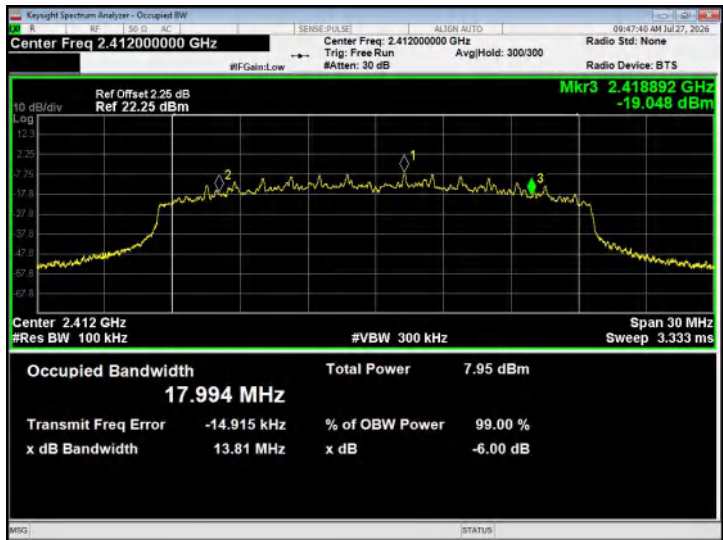

802.11ax20 - CH06

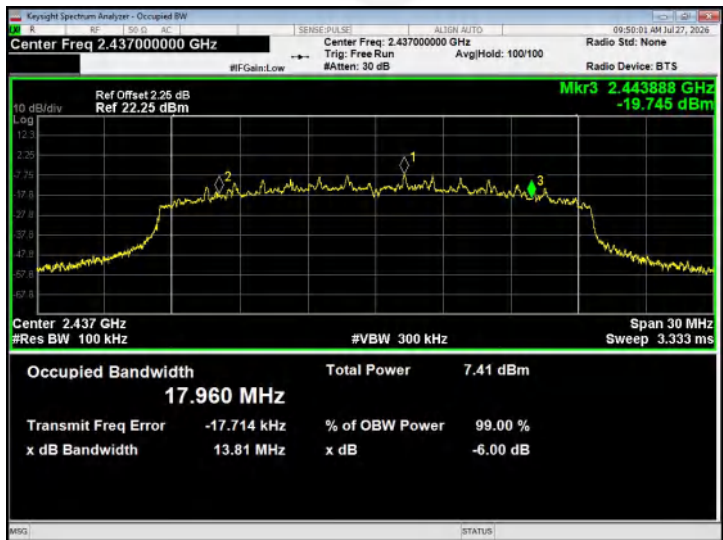


802.11ax20 - CH11

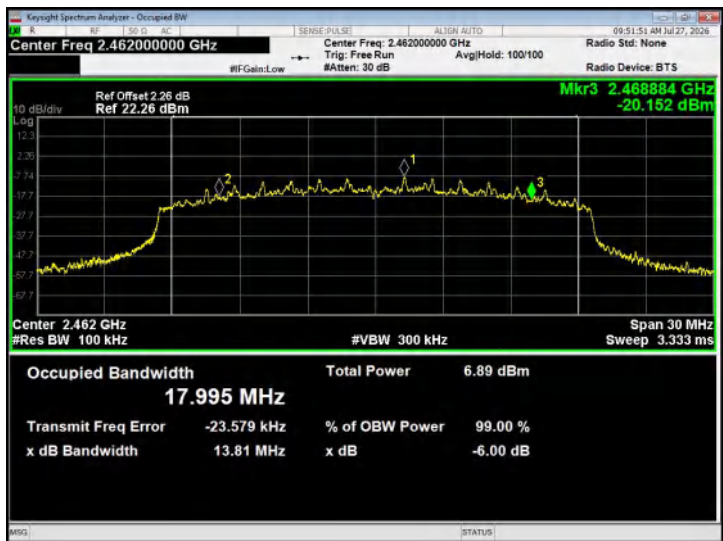




802.11ax40 - CH03

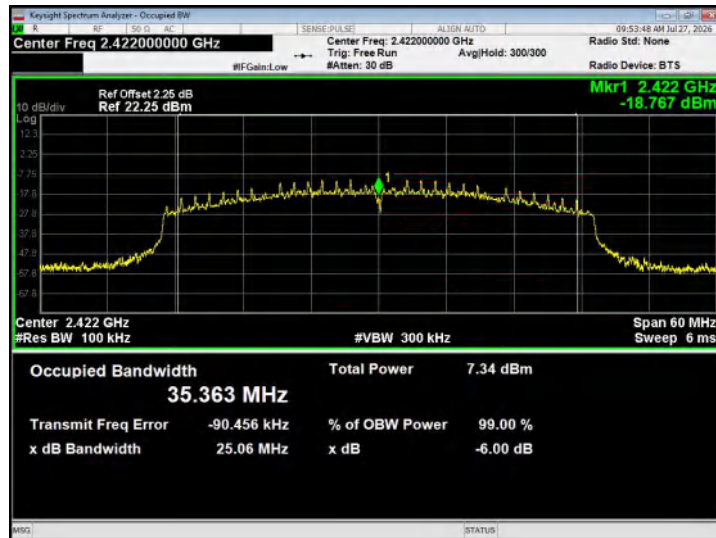

802.11ax40 - CH06



802.11ax40 - CH09

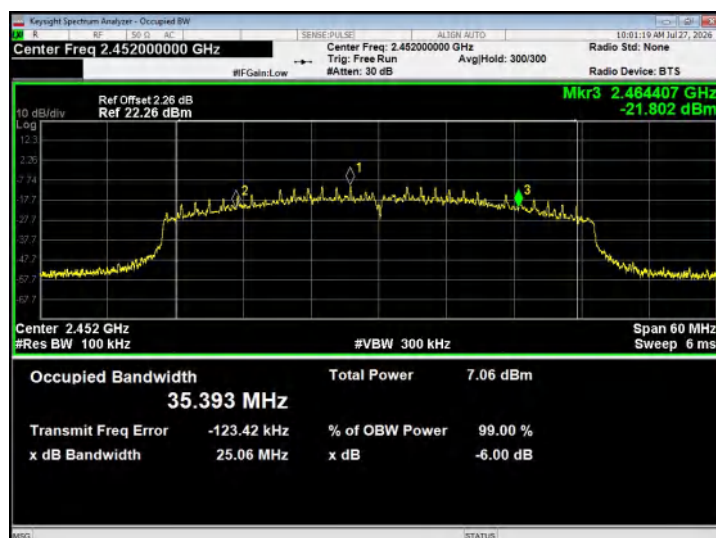



8. PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.



8.6 TEST RESULT

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V

Test Mode	Test Channel (MHz)	Peak Output Power (dBm)	Limit (dBm)	Result
802.11b	2412	8.853	30.00	Pass
	2437	8.534		
	2462	7.906		
802.11g	2412	7.459	30.00	Pass
	2437	7.145		
	2462	6.555		
802.11n20	2412	7.282	30.00	Pass
	2437	6.955		
	2462	6.326		
802.11n40	2422	6.520	30.00	Pass
	2437	6.501		
	2452	6.512		
802.11ax20	2412	7.224	30.00	Pass
	2437	6.796		
	2462	6.045		
802.11ax40	2422	6.574	30.00	Pass
	2437	6.548		
	2452	6.313		



9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

9.1 APPLICABLE STANDARD

Typical regulatory requirements specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions⁸⁹:

The maximum peak conducted output power procedure was used to determine compliance as described in 11.9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

9.2 TEST PROCEDURE

A. Reference level measurement, establish a reference level by using the following procedure:

- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 times the DTS bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

B. Emission level measurement, establish an emission level by using the following procedure:

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.



9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

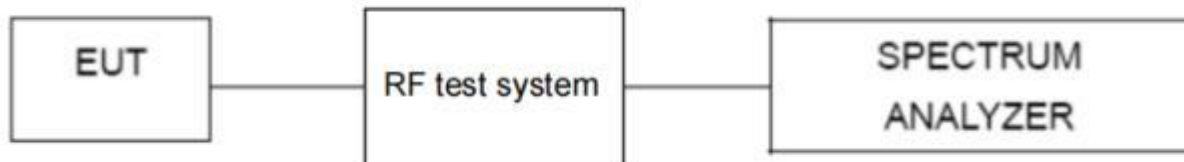

9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.





9.6 TEST RESULTS



Band edge test plot as follows:

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz

802.11b - Lowest channel

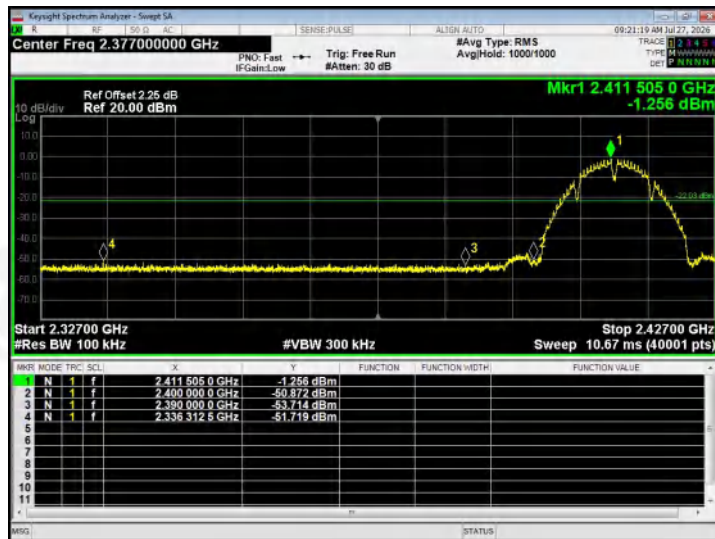
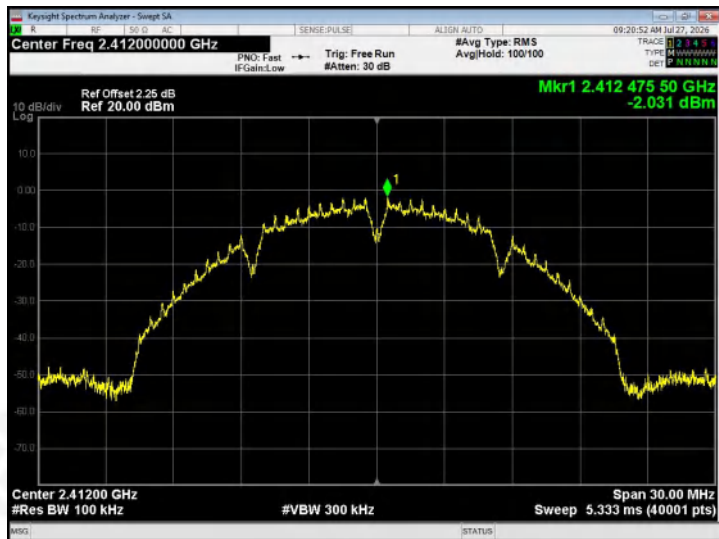


802.11b - Highest channel

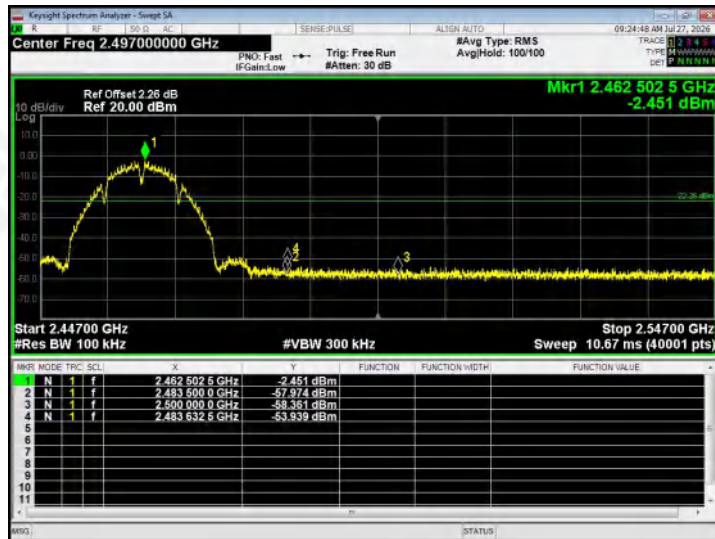
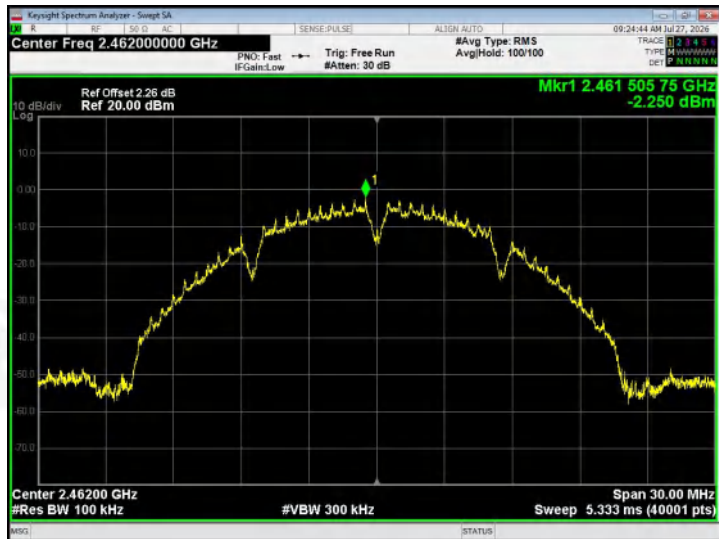




802.11g - Lowest channel

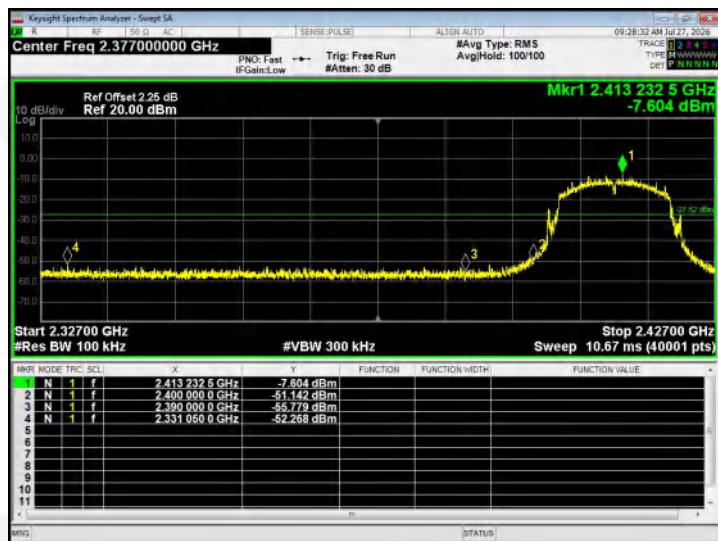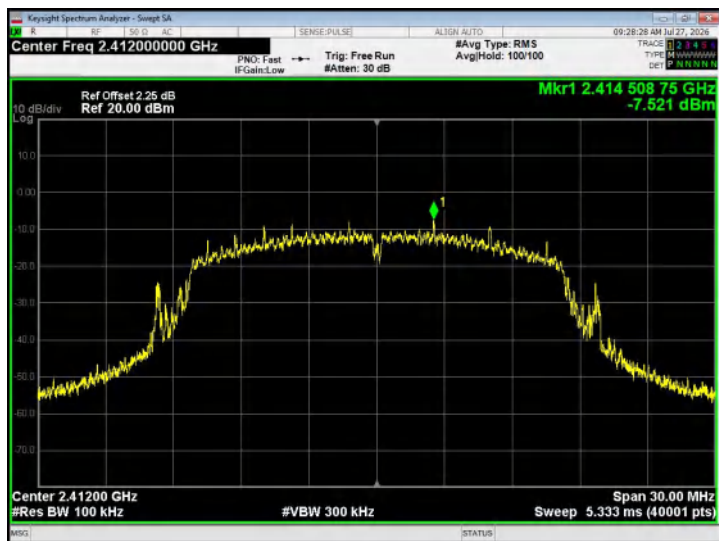


802.11g - Highest channel

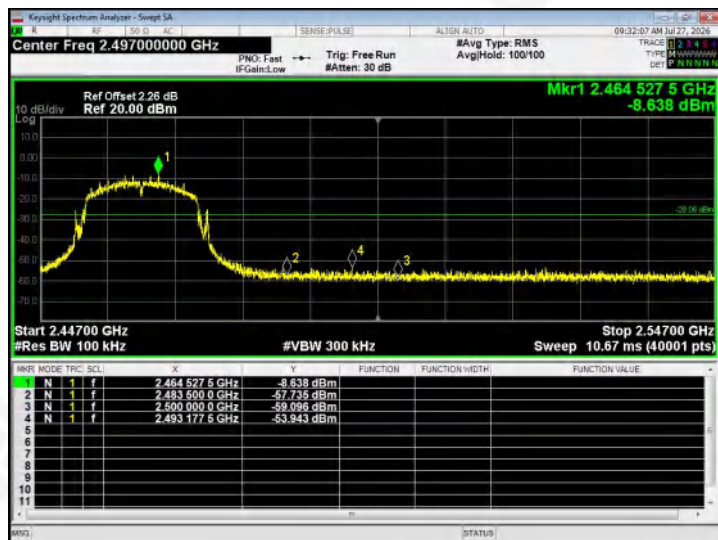
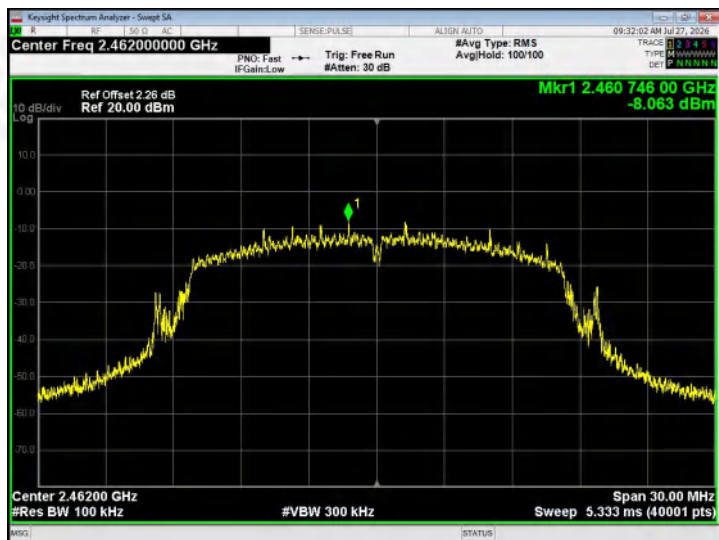




802.11n20 - Lowest channel


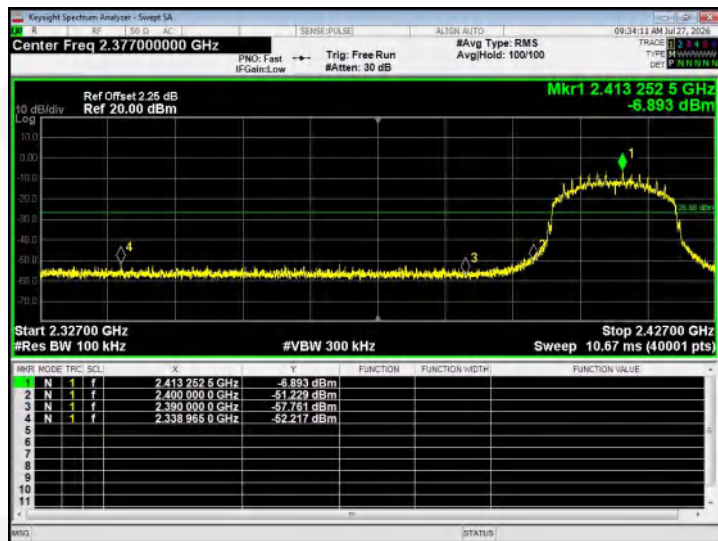


802.11n20 - Highest channel

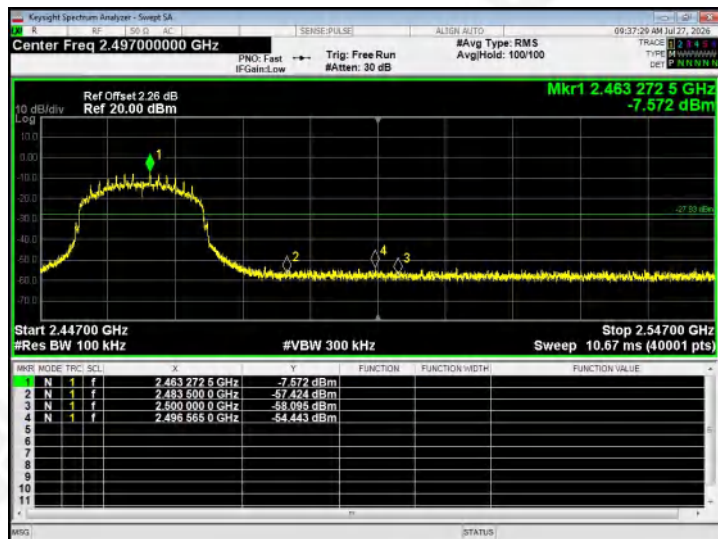
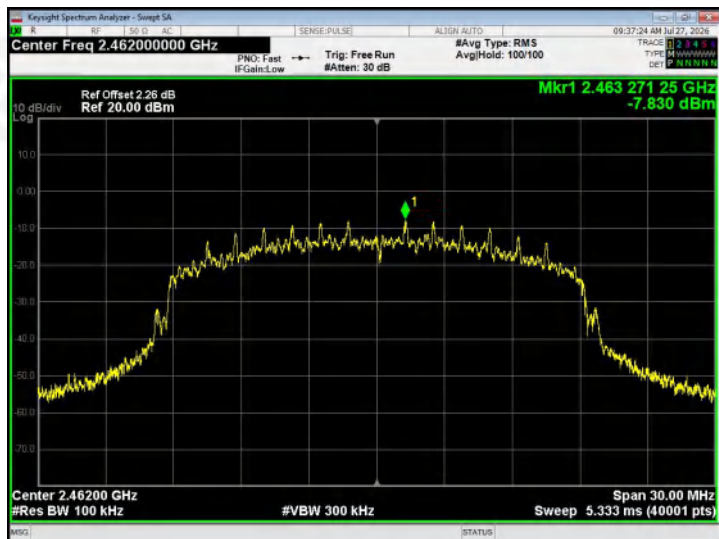




802.11n40 - Lowest channel

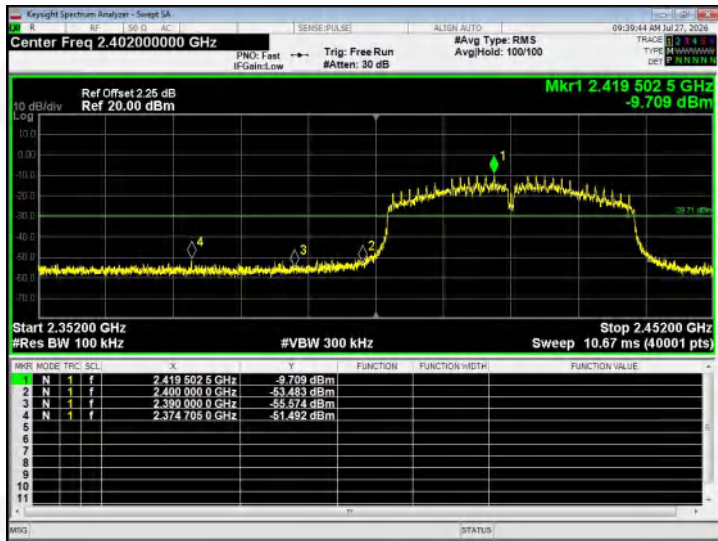
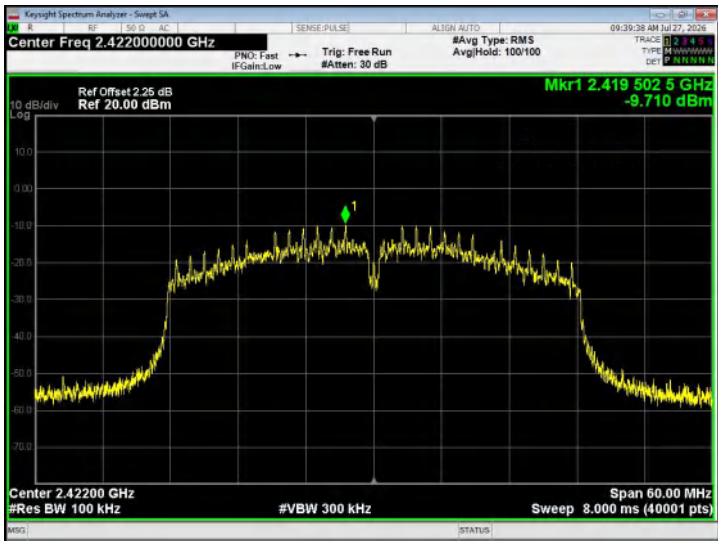


802.11n40 - Highest channel

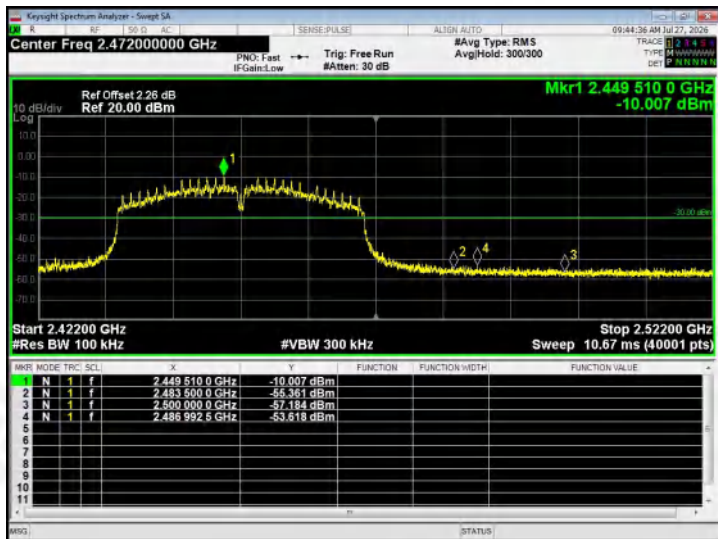
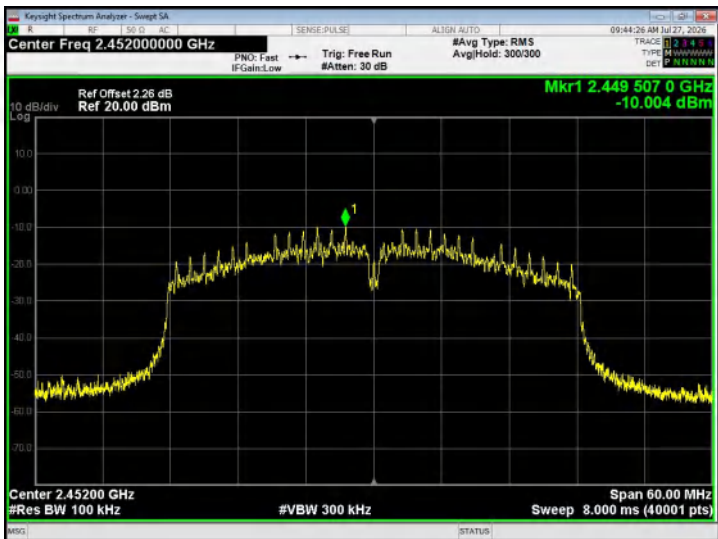




802.11ax20 - Lowest channel

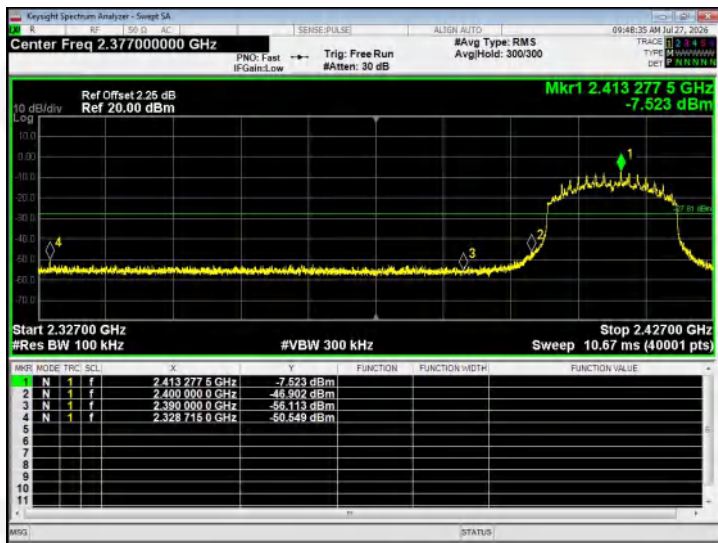
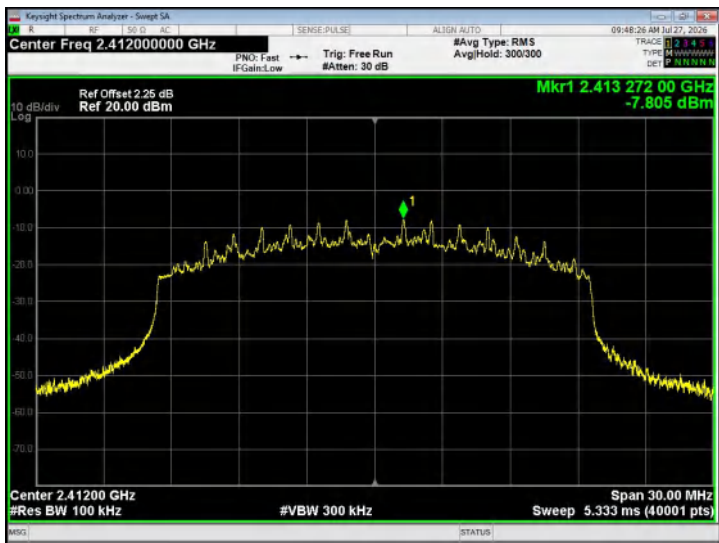


802.11ax20 - Highest channel

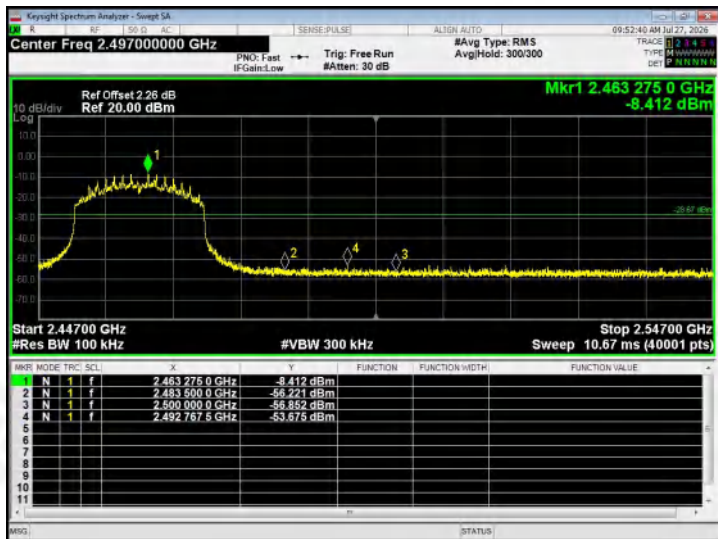
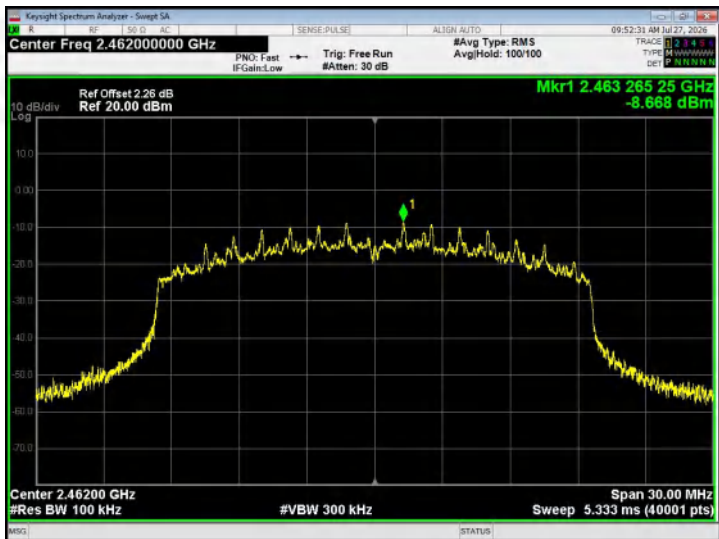




802.11ax40 - Lowest channel

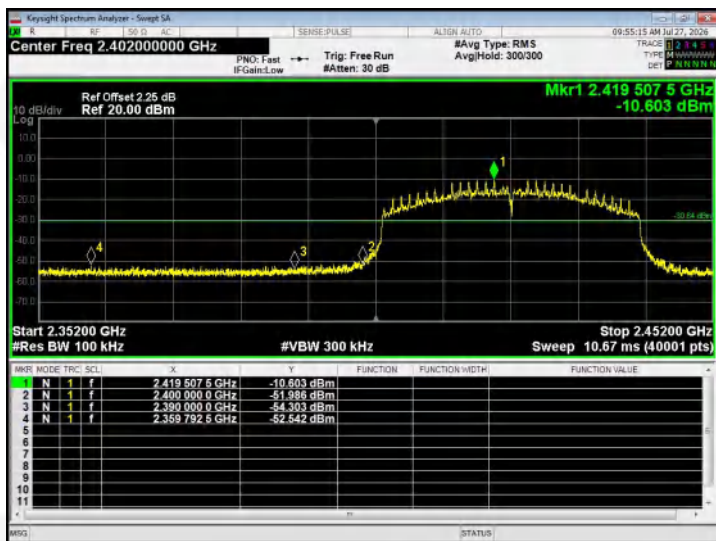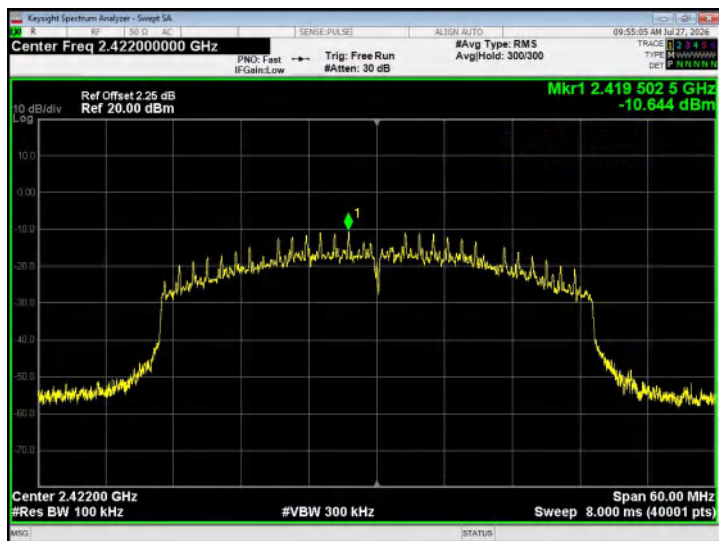



802.11ax40 - Highest channel

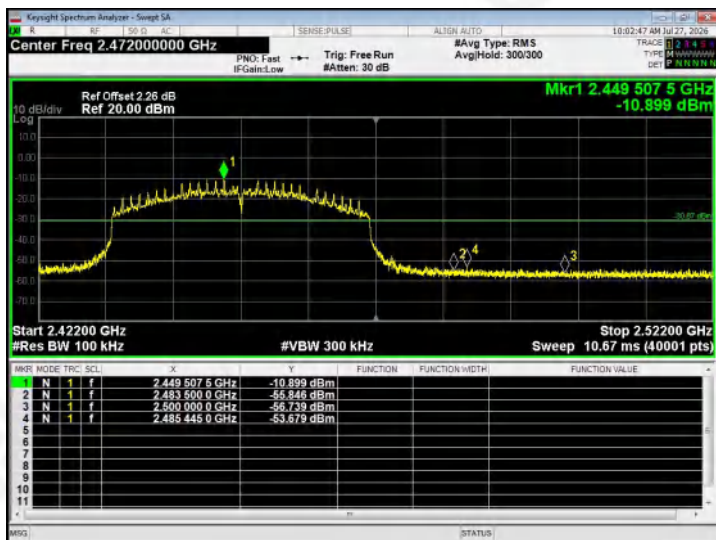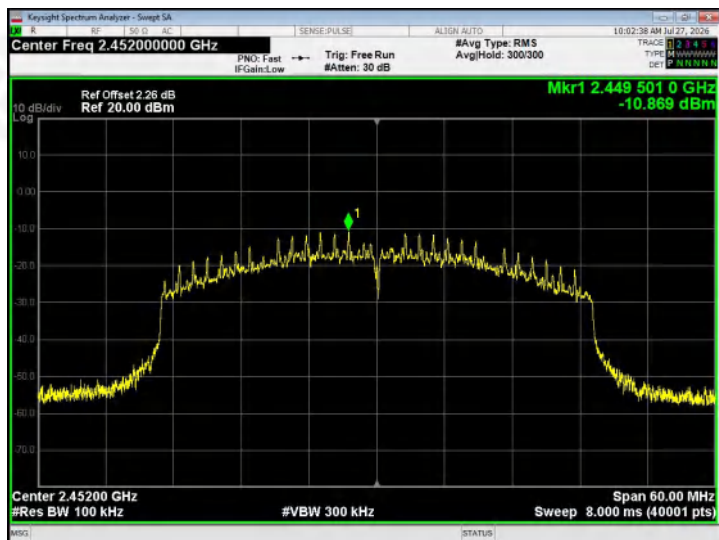




Spurious emission test plot as follows:


802.11b
Lowest channel

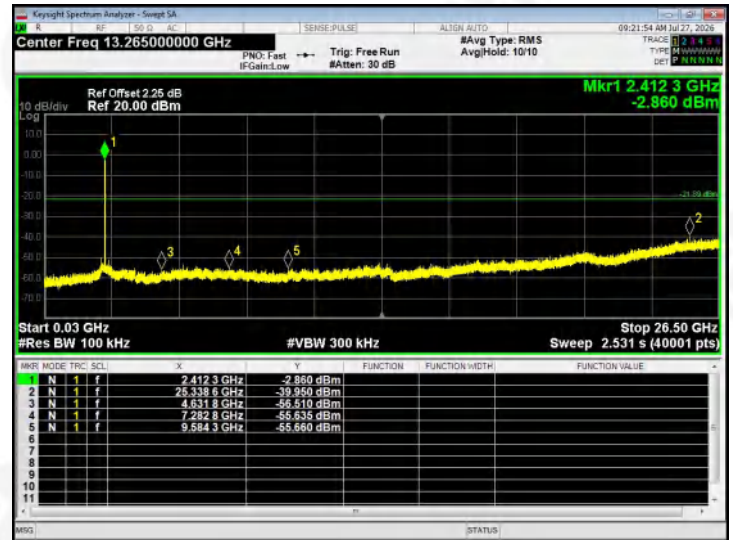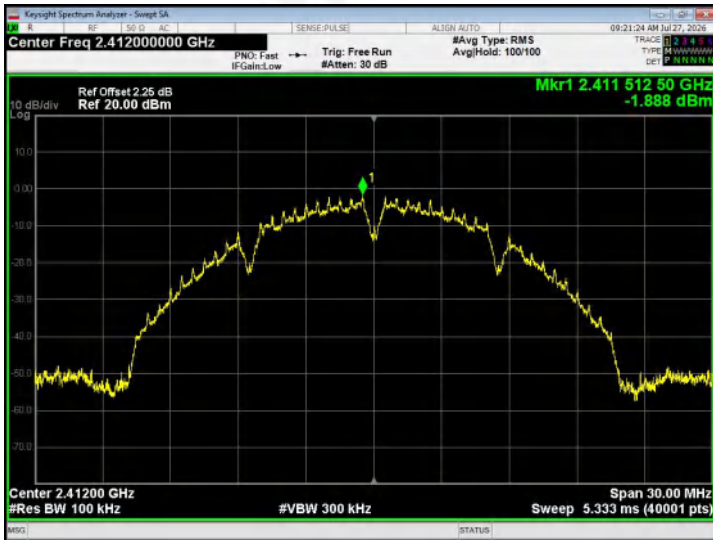

Middle channel

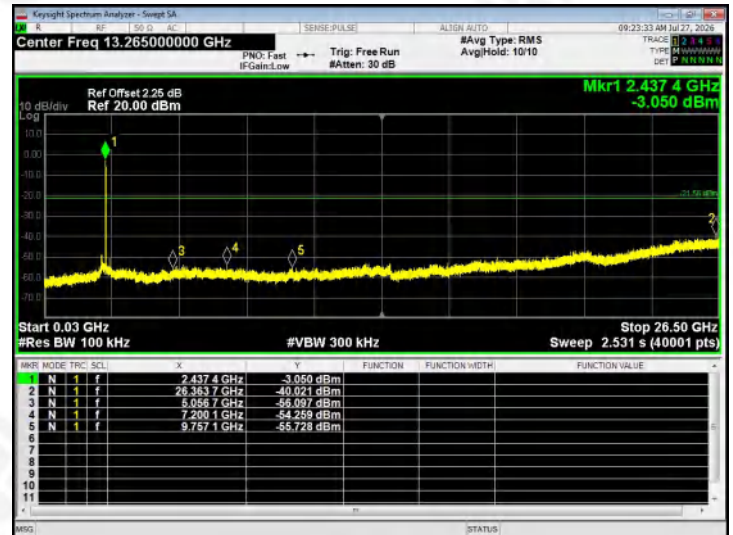

Highest channel


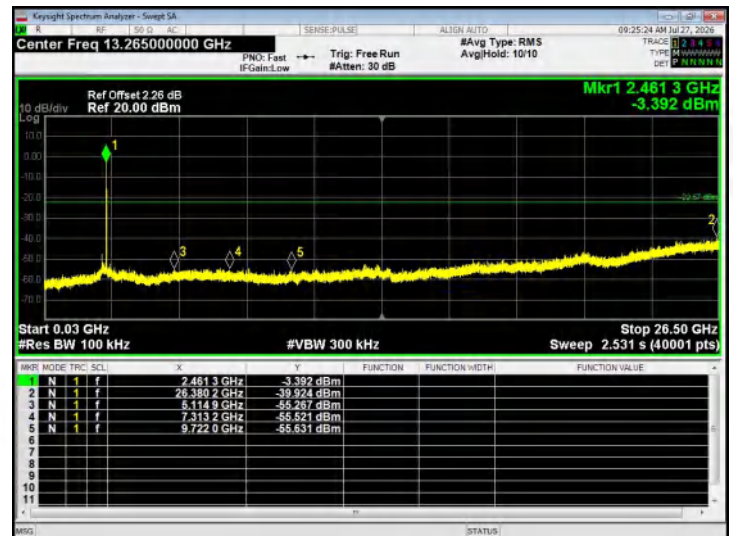


30MHz ~ 26.5GHz




802.11g



Lowest channel

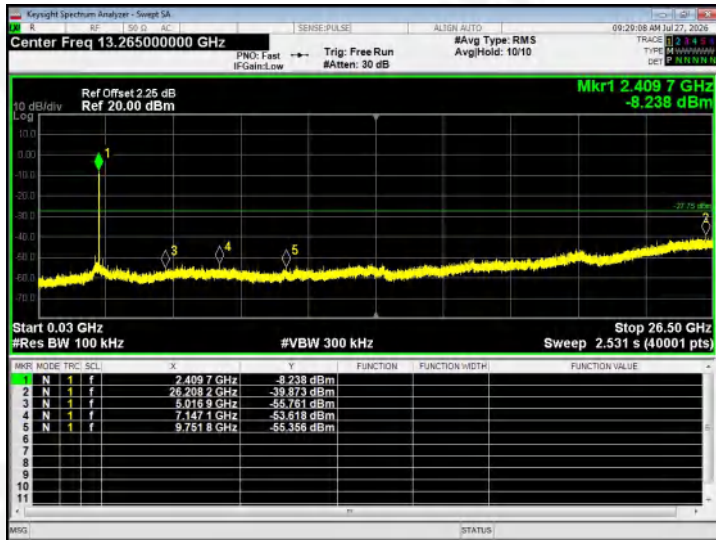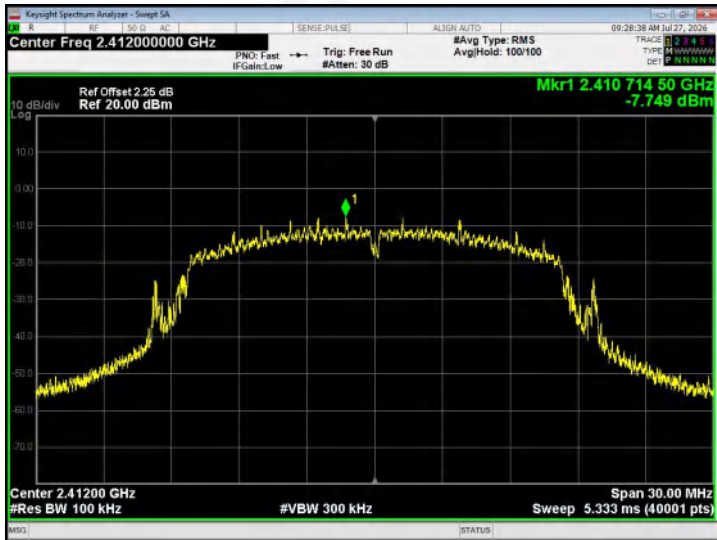

Middle channel

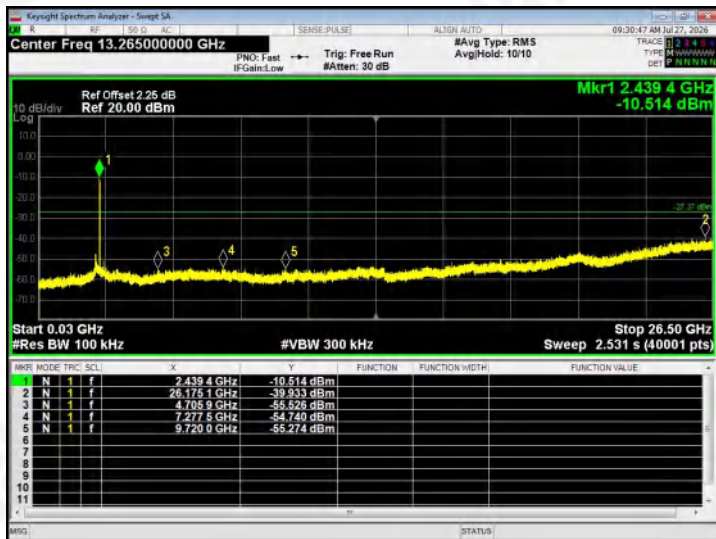

Highest channel

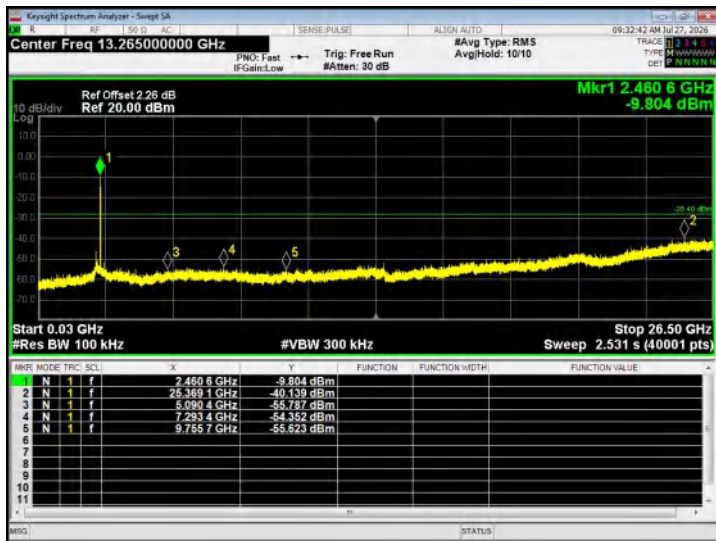
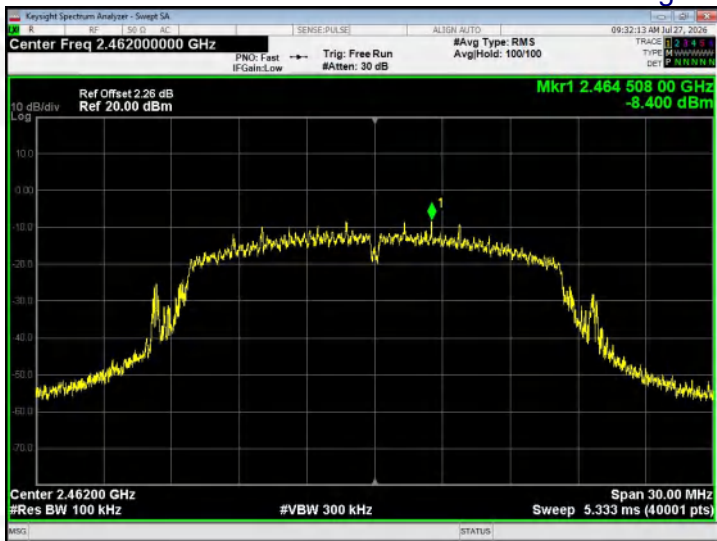


30MHz ~ 26.5GHz





802.11n20



Lowest channel

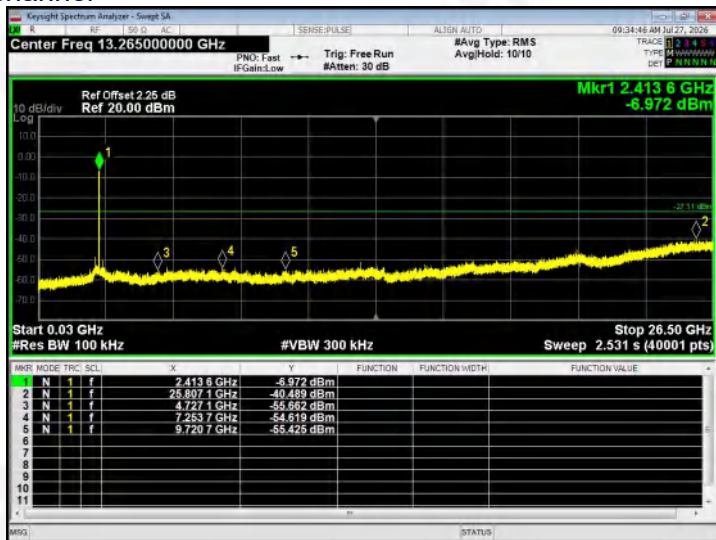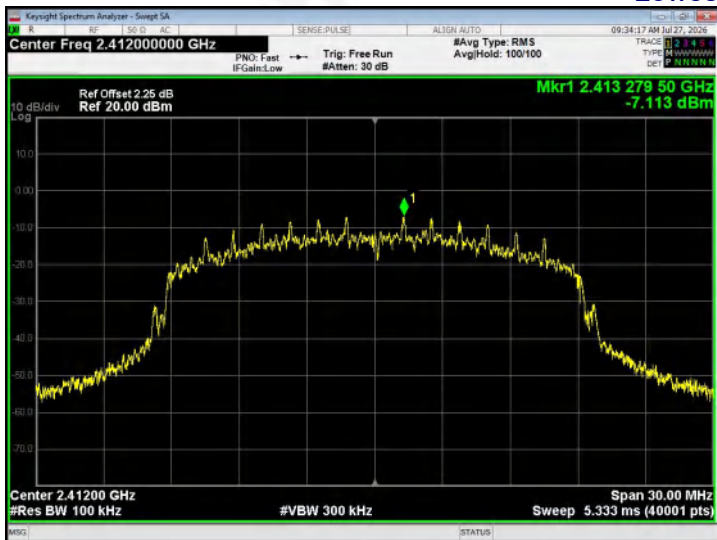

Middle channel

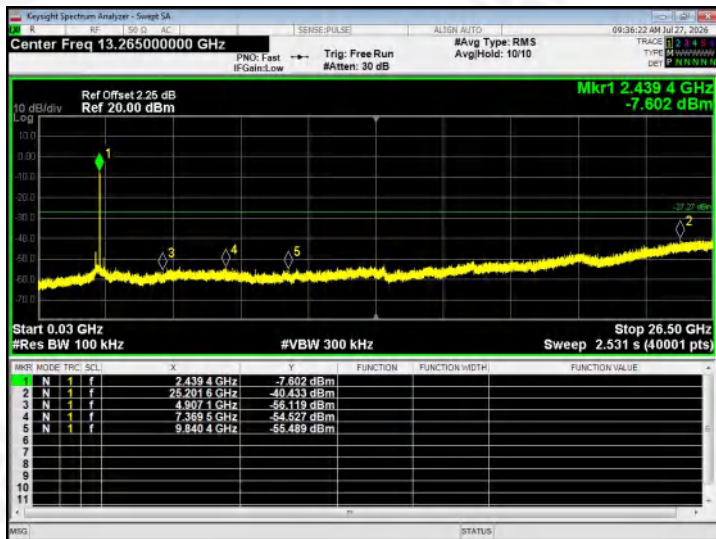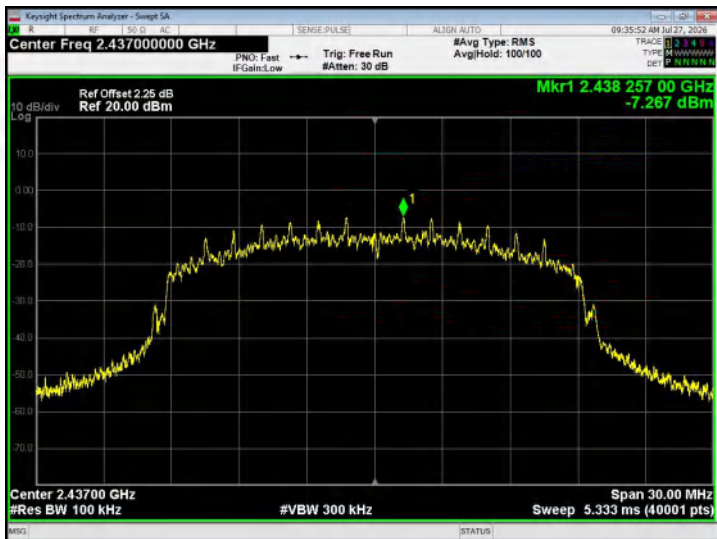

Highest channel

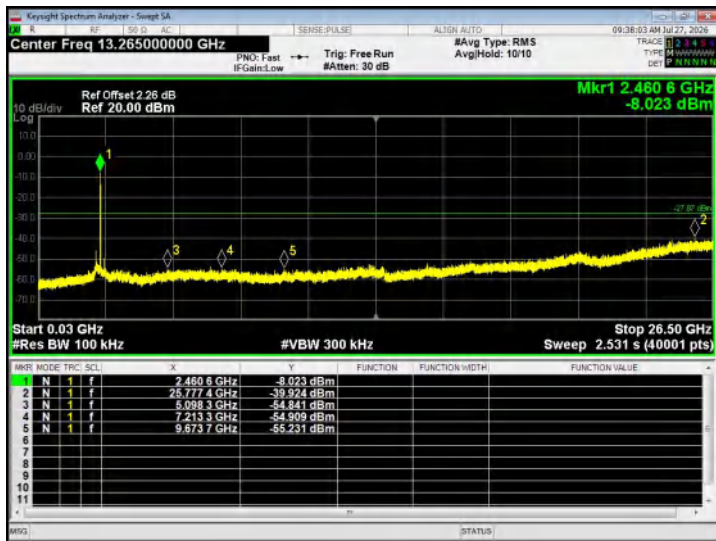
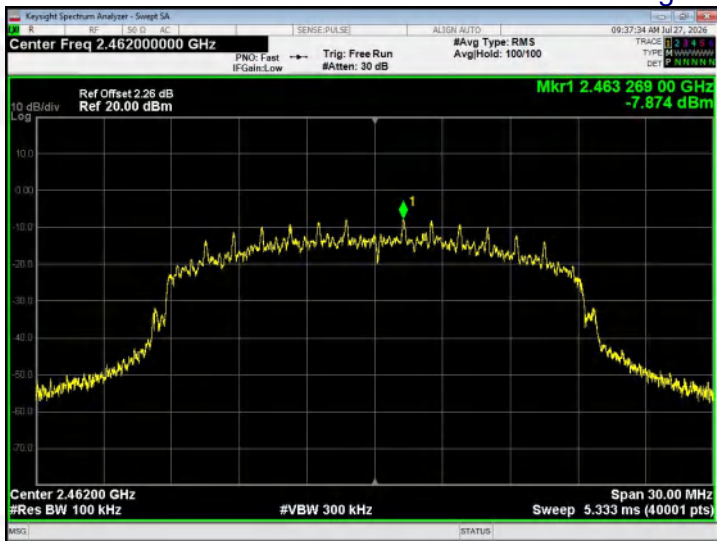


30MHz ~ 26.5GHz





802.11n40



Lowest channel

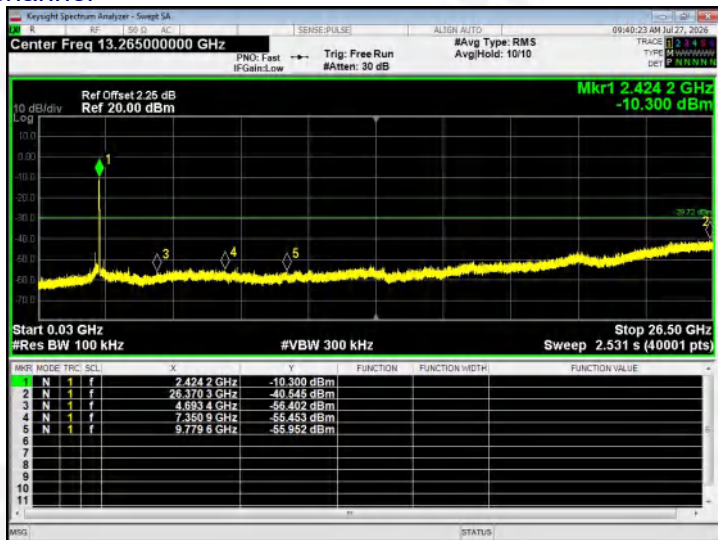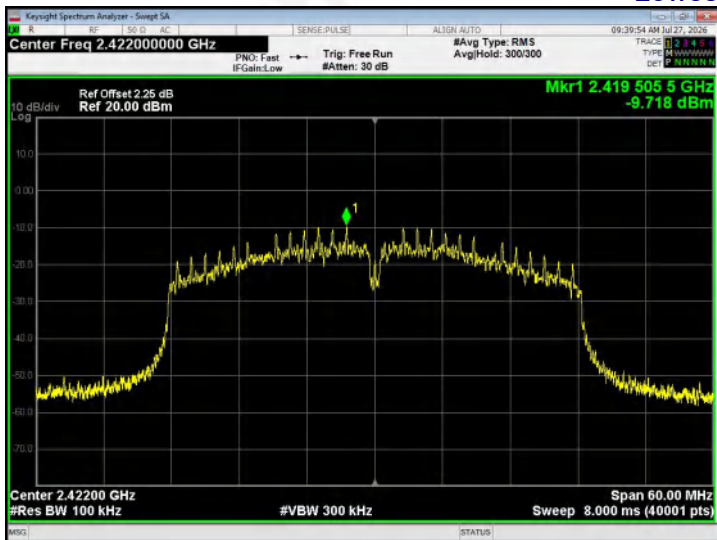

Middle channel

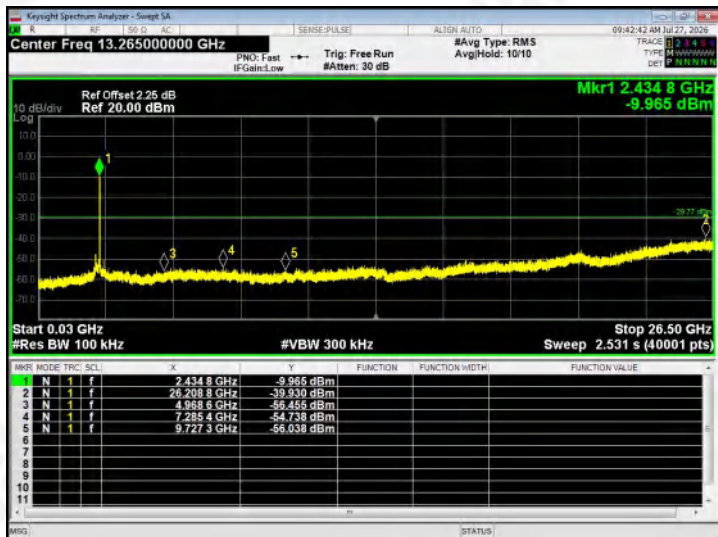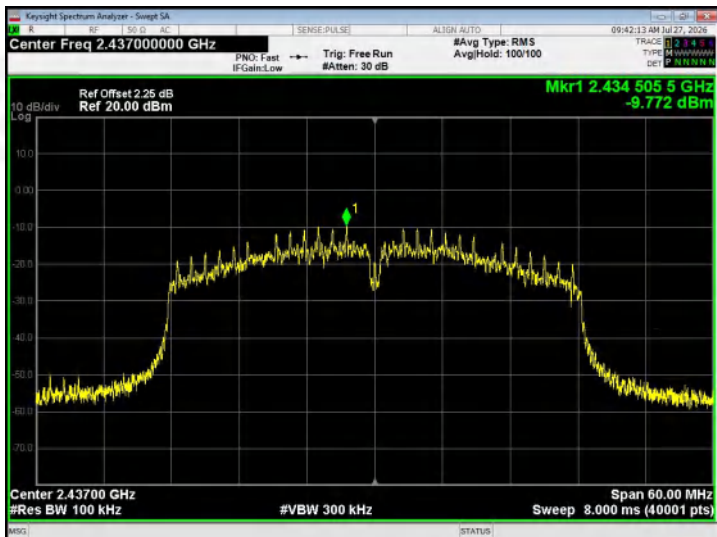

Highest channel

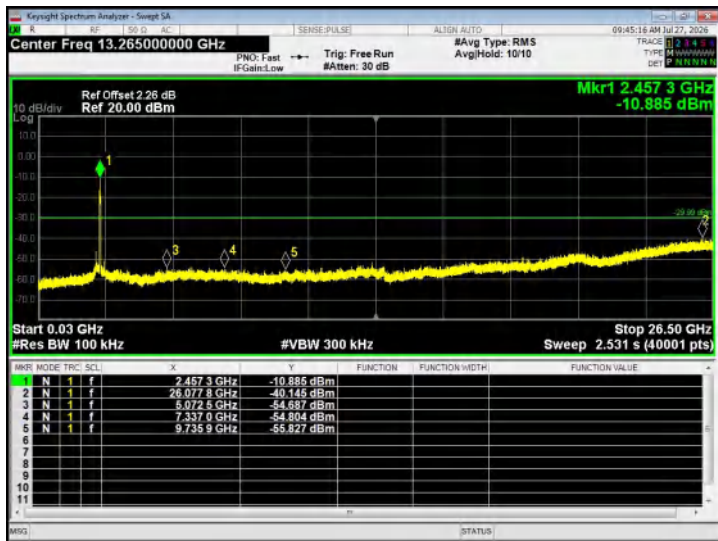
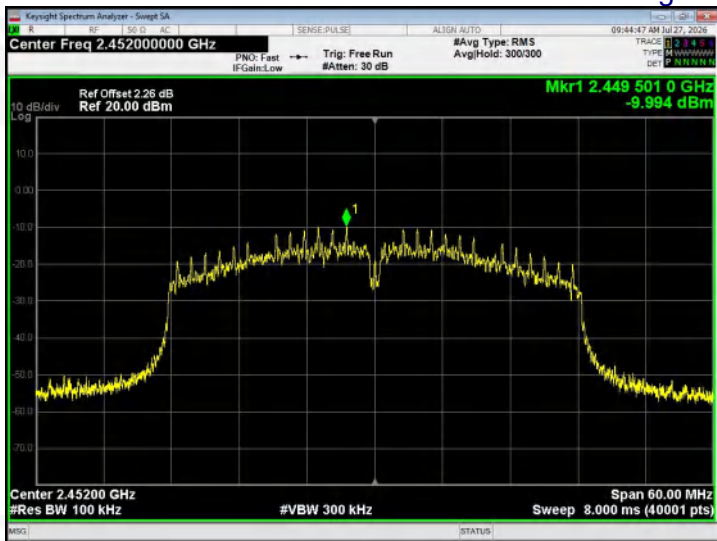


30MHz ~ 26.5GHz





802.11ax20



Lowest channel

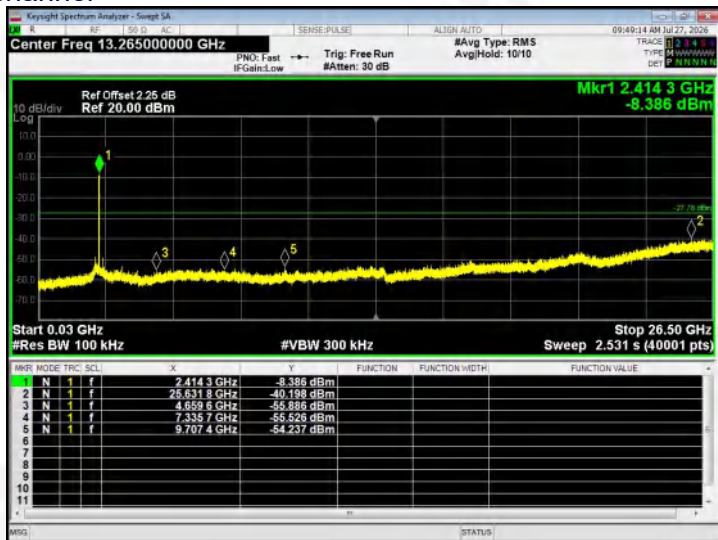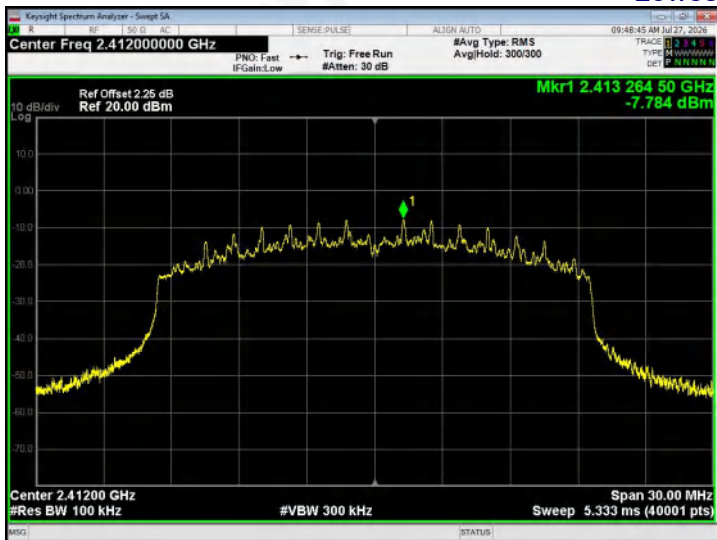

Middle channel

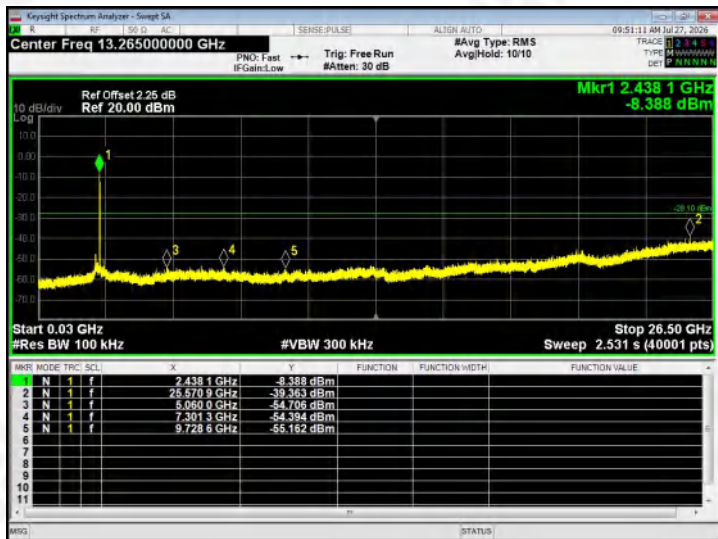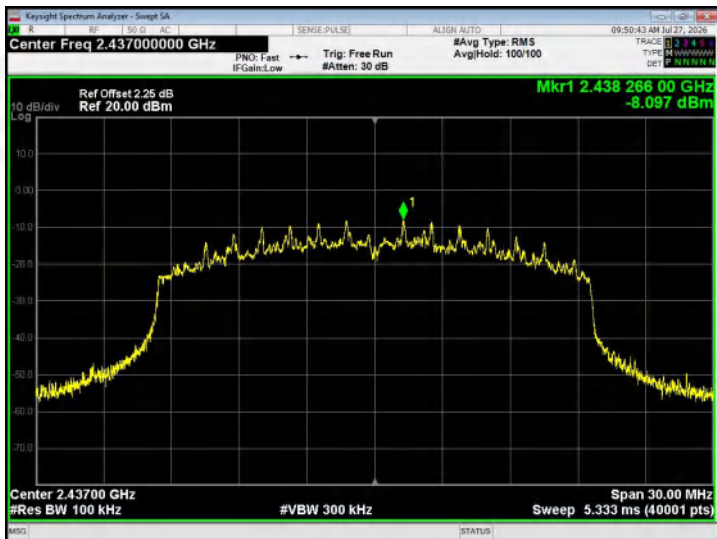

Highest channel

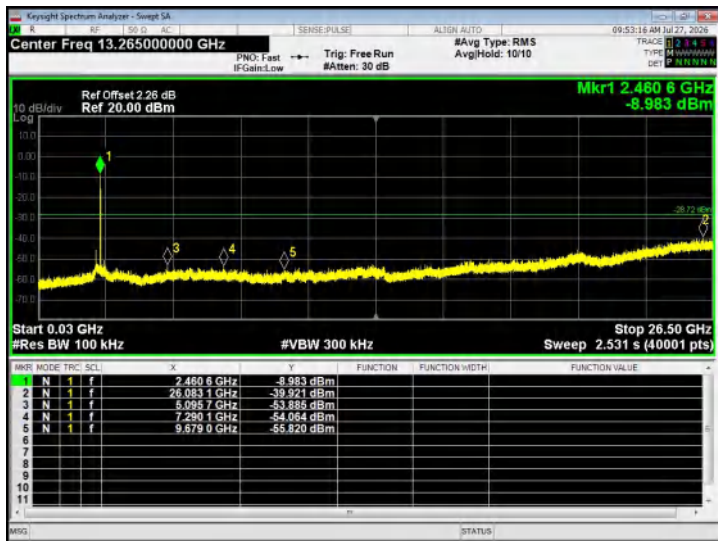
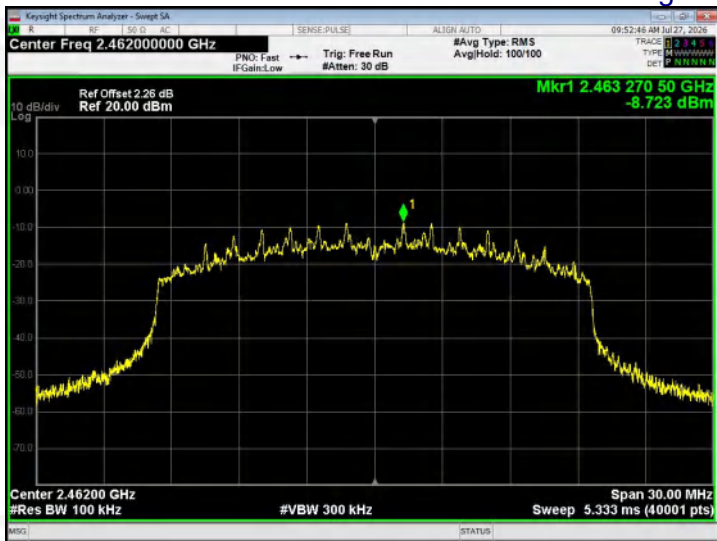


30MHz ~ 26.5GHz





802.11ax40



Lowest channel

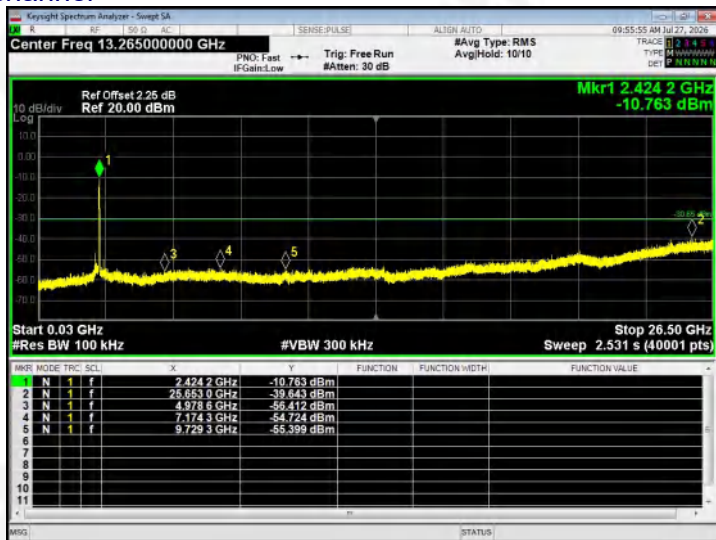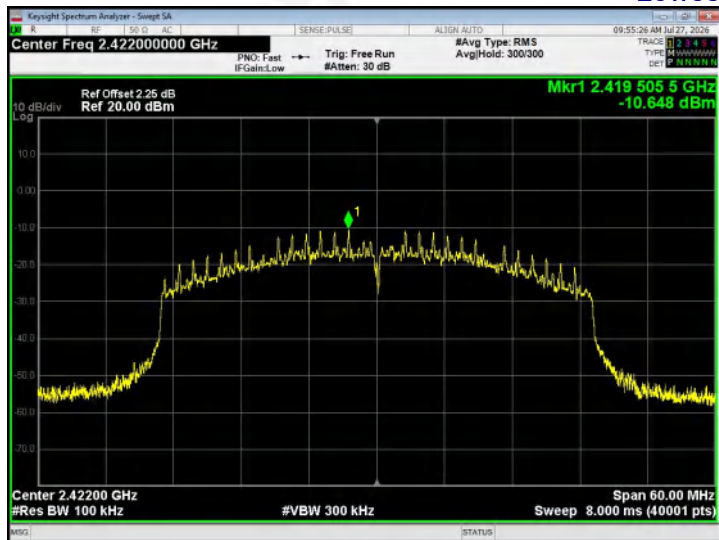

Middle channel

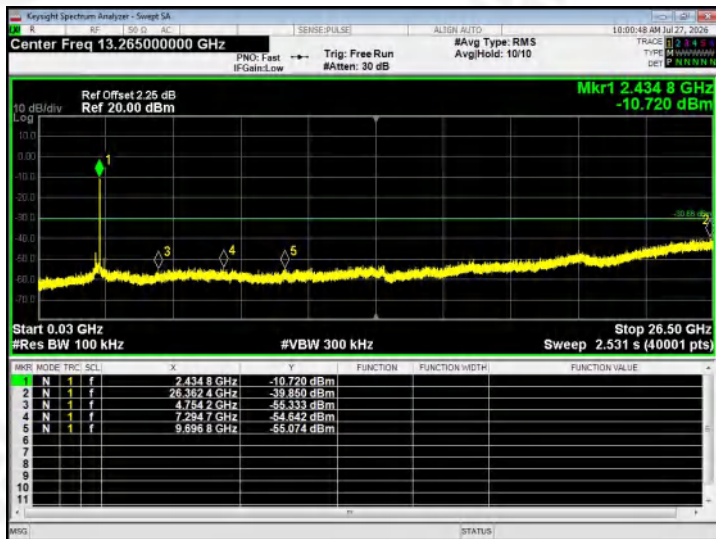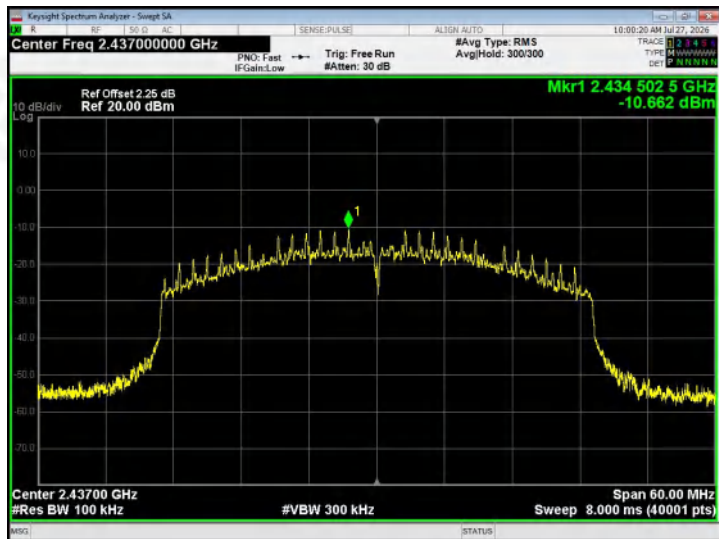

Highest channel

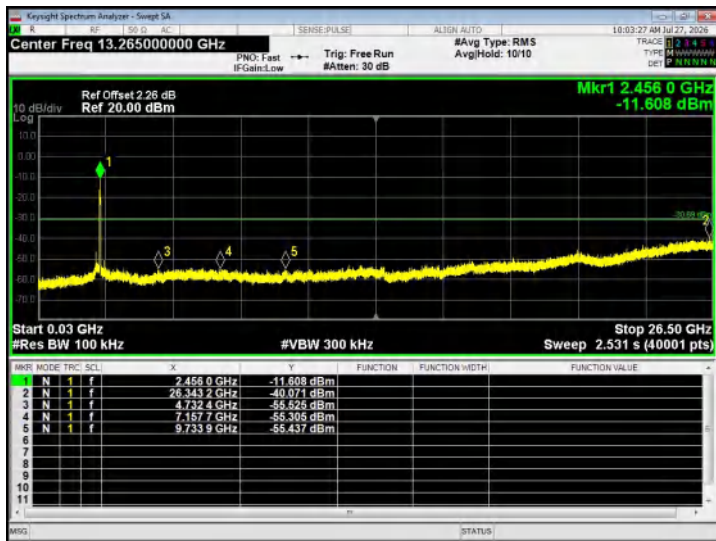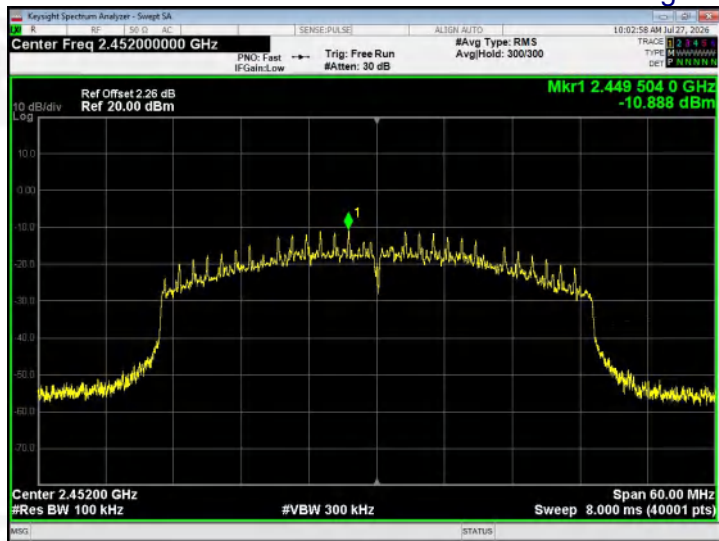

30MHz ~ 26.5GHz



10. DUTY CYCLE

Test Method:	ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Erratato C63.10a-2024
--------------	---

10.1 APPLIED PROCEDURES / LIMIT


Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

10.2 DEVIATION FROM STANDARD

No deviation.

10.3 TEST SETUP

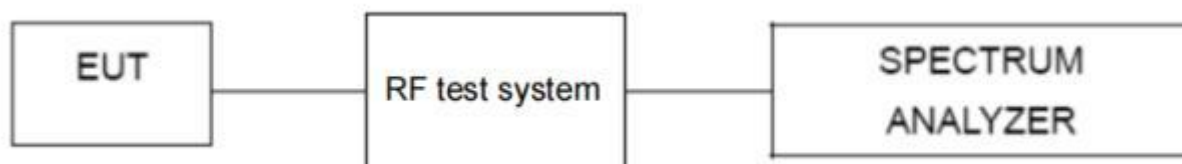

10.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.



10.5 TEST RESULTS

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V


Test Mode	Test Frequency (MHz)	Duty Cycle (%)	Factor (dB)	Result
802.11b	2412	99.03	0.04	Pass
802.11g	2412	98.86	0.05	Pass
802.11n20	2412	97.82	0.10	Pass
802.11n40	2422	95.60	0.20	Pass
802.11ax20	2412	95.24	0.21	Pass
802.11ax40	2422	92.77	0.33	Pass

Note: Duty Cycle = Ton / Total * 100%;
Duty Cycle Correction Factor = 10log (1/Duty Cycle).




802.11b

2412MHz

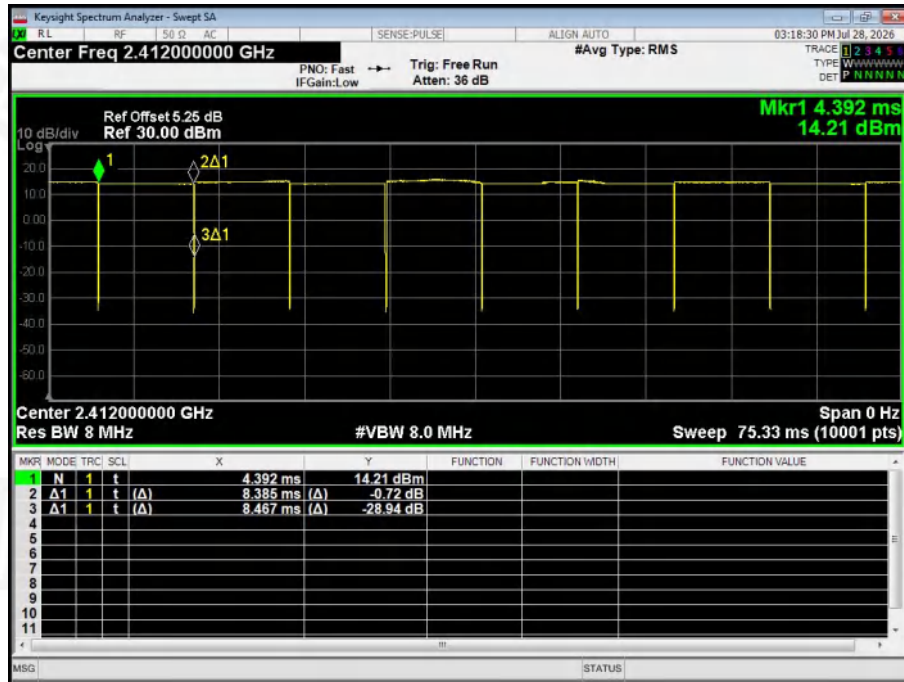

802.11g

2412MHz

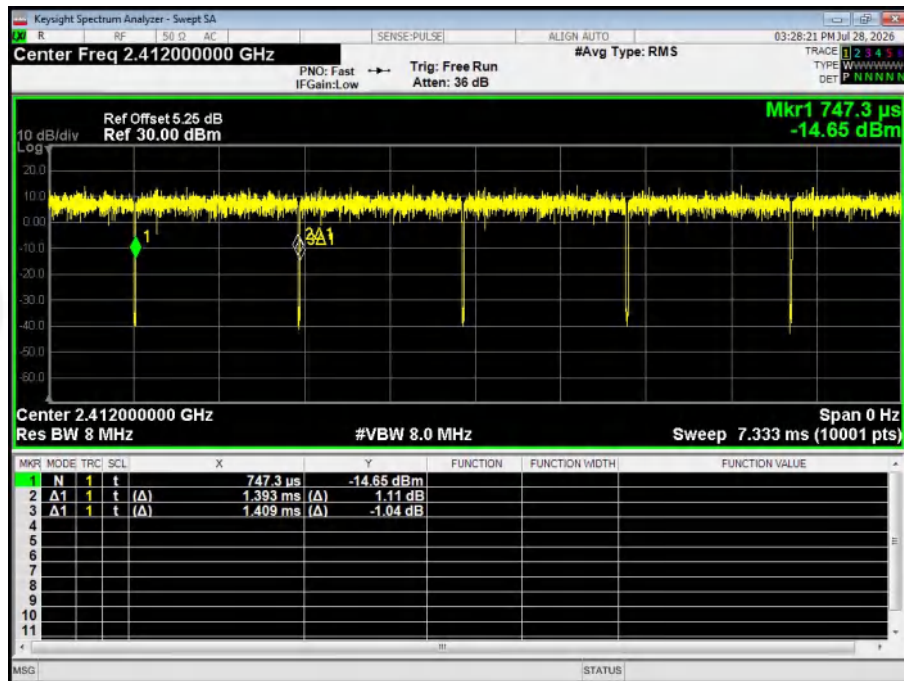


Note: All channel have been tested, and the report only reflects the worst case data.




802.11n20

2412MHz

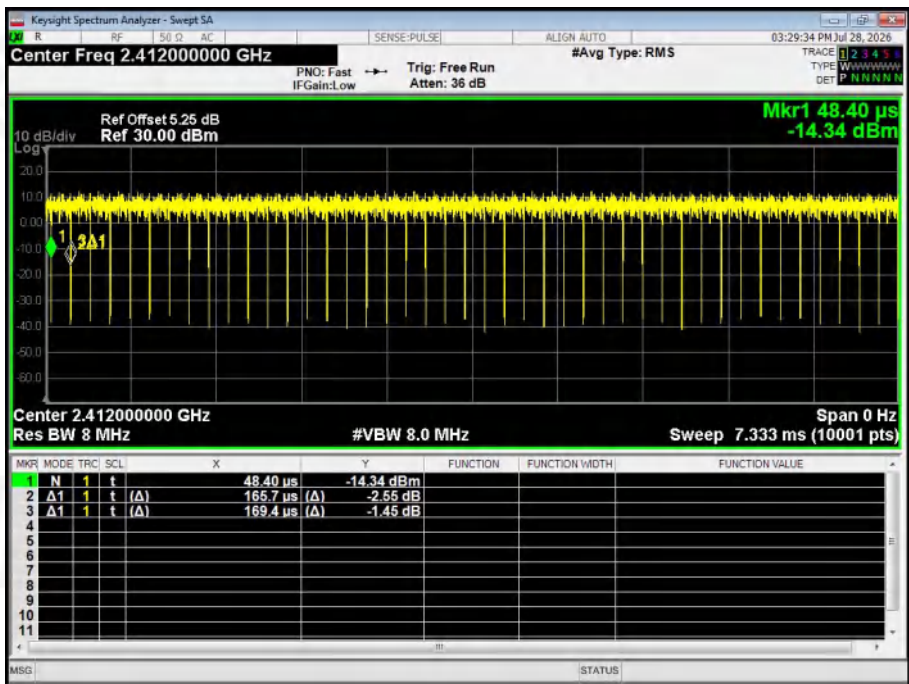

802.11n40

2422MHz

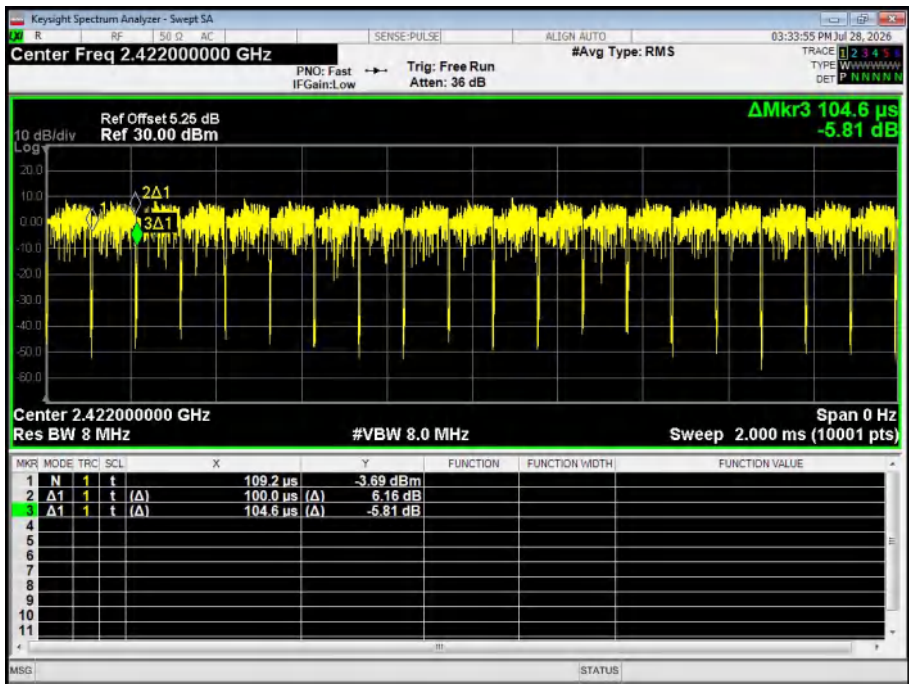


Note: All channel have been tested, and the report only reflects the worst case data.




802.11ax20

2412MHz

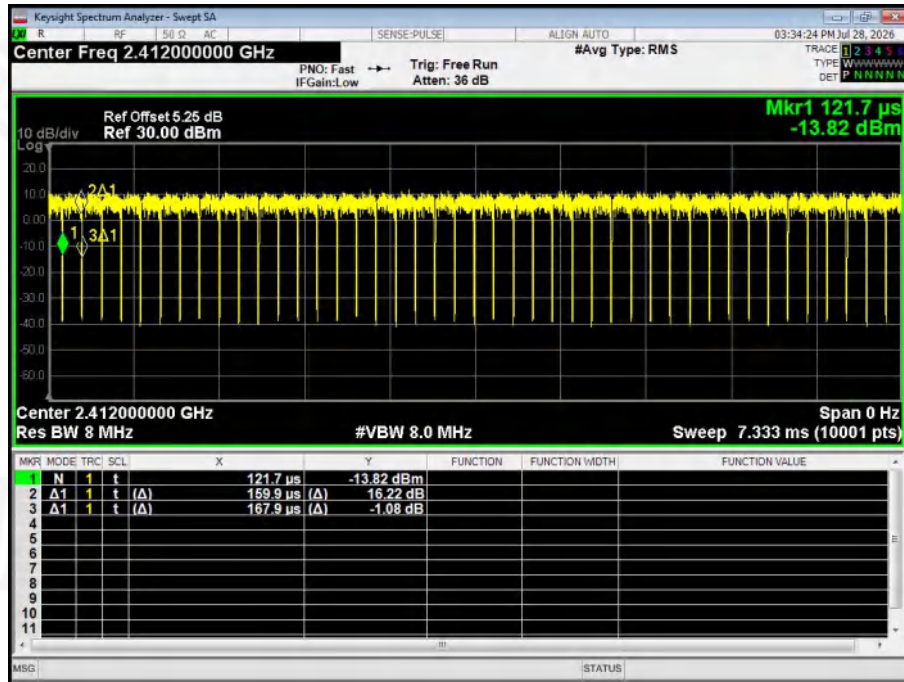

802.11ax40

2422MHz

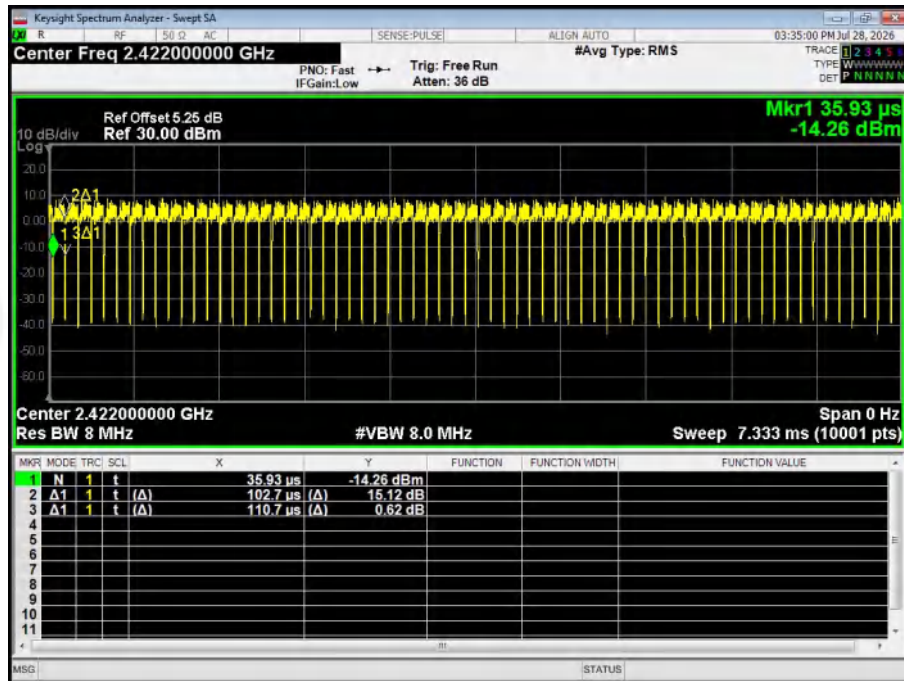

Note: All channel have been tested, and the report only reflects the worst case data.



11. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is PCB antenna, the best case gain of the antenna is 3.25dBi, reference to the appendix II for details.	



12. TEST SETUP PHOTO

Reference to the appendix I for details.

13. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****