

TEST REPORT

Test item description: security camera
FCC ID: 2BXKL-6606
Trademark(s): N/A
Model/Type reference: 6606, 6609, 6610, 6611, 6612, 6613, 6615, 9562, 6601, 6008, 6009, 6002, 6003, 6005, 6006, 6007, 6010, 9836, 9936, 9632, 5601, 9560, 6701, 6702, 6703, 6607, 6608
Applicant's name: Shenzhen Aikechuangpin Technology Co., Ltd.
Address: Rm 1005, Tower 3, Manjinghua Yiluan Bldg, No. 230 Avenue, Xixiang, Bao'an, Shenzhen, China
Manufacturer: Shenzhen Aikechuangpin Technology Co., Ltd.
Address: Rm 1005, Tower 3, Manjinghua Yiluan Bldg, No. 230 Avenue, Xixiang, Bao'an, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jul. 30, 2026
Sample tested Date: Jul. 30, 2026 to Aug. 13, 2026
Issue Date: Aug. 13, 2026
Report No.: CTB26073008901RH01
Test Standards: FCC 47 CFR Part2(2.1093), FCC 47 CFR Part1(1.1310)
FCC 47 CFR Part1(1.1307), ANSI/IEEE C95.1-2019
IEEE 1528-2013 & Published RF Exposure KDB Procedures
Test Results: PASS
Remark: This is SAR test report.
Compiled by: Reviewed by: Approved by:

Zhang Mao cheng

Martin Feng

Rita Xiao

Zhang Mao cheng

Martin Feng

Rita Xiao / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

Contents

	Page
1 COVER PAGE.....	1
CONTENTS	2
1. VERSION.....	4
2. PRODUCT INFORMATION AND TEST SETUP.....	5
2.1 PRODUCT INFORMATION	5
3 EQUIPMENT USED DURING TEST	6
3.1 EQUIPMENT LIST	6
3.2 TEST EQUIPMENT CALIBRATION	7
4 SAR INTRODUCTION.....	8
4.1 INTRODUCTION.....	8
4.2 SAR DEFINITION	8
5 SAR MEASUREMENT SETUP.....	9
5.1 SAR MEASUREMENT SETUP	9
5.2 DASY5 E-FIELD PROBE SYSTEM	10
5.3 PROBE SPECIFICATION.....	10
5.4 ISOTROPIC E-FIELD PROBE	10
5.5 PHANTOMS	11
5.6 DEVICE HOLDER.....	11
6 SAR TEST PROCEDURE	12
6.1 SCANNING PROCEDURE	12
6.2 EXTRAPOLATION	15
6.3 TEST POSITION - BODY CONFIGURATIONS.....	15
7 EXPOSURE LIMIT.....	16
7.1 UNCONTROLLED ENVIRONMENT	16
7.2 CONTROLLED ENVIRONMENT.....	16
8 SYSTEM AND LIQUID VALIDATION	17
8.1 SYSTEM VALIDATION.....	17
8.2 LIQUID VALIDATION.....	19
8.3 TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS	20
9 SYSTEM VERIFICATION PLOTS	22
10 TYPE A MEASUREMENT UNCERTAINTY.....	28
11 OUTPUT POWER VERIFICATION	30
11.1 TEST CONDITION:	30
11.2 TEST PROCEDURES:	30
12 EXPOSURE CONDITIONS CONSIDERATION	66
13 SAR TEST RESULTS	69
13.1 TEST CONDITION:	69
13.2 GENERALLY TEST PROCEDURES:.....	69



13.3	SAR SUMMARY TEST RESULT:	70
13.4	MEASUREMENT VARIABILITY CONSIDERATION	81
13.5	SIMULTANEOUS TRANSMISSION SAR ANALYSIS.	82
13.6	SAR MEASUREMENT REFERENCE	83
14	MAXIMUM SAR MEASUREMENT PLOTS	84
15	CALIBRATION REPORTS-PROBE AND DIPOLE	91
16	SAR SYSTEM PHOTOS.....	92
17	SETUP PHOTO.....	93
18	EUT PHOTOS.....	94

1. Version

Report No.	Issue Date	Description	Approved
CTB26073008901RH01	Aug. 13, 2026	Original	Valid

2. PRODUCT INFORMATION AND TEST SETUP

2.1 Product Information

Model/Type reference:	6606, 6609, 6610, 6611, 6612, 6613, 6615, 9562, 6601, 6008, 6009, 6002, 6003, 6005, 6006, 6007, 6010, 9836, 9936, 9632, 5601, 9560, 6701, 6702, 6703, 6607, 6608
Model Description:	The product has many models, only the model name and color is different, and the other parts such as the circuit principle, pcb and electrical structure are the same. Test sample model: 6606
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	LTE BAND2: 1850-1910MHz LTE BAND4: 1710-1755 MHz LTE BAND5: 824-849MHz LTE BAND7: 2500-2570MHz LTE BAND38: 2570-2620MHz LTE BAND41: 2496-2690MHz LTE BAND66: 1710-1780 MHz FDD-LTE BAND 2: 22.1dBm FDD-LTE BAND 4: 22.44dBm FDD-LTE BAND 5: 22.36dBm
Max. RF output power:	FDD-LTE BAND 7: 22.97dBm FDD-LTE BAND 38: 22.58dBm FDD-LTE BAND 41: 23dBm TDD-LTE BAND 66: 22.89dBm
Max.SAR:	0.77 W/Kg 1g Body Tissue
Type of Modulation:	QPSK, 16QAM
Antenna installation:	Internal Antenna
Antenna Gain:	Band2: 2.69dBi; Band4: 1.71; Band5: -0.96dBi; Band7: -0.84dBi; Band38: -1.65dBi; Band41: -0.84dBi; Band66: 2.46dBi
Ratings:	DC 5V charging from adapter DC 3.7V by battery

3 Equipment Used during Test

3.1 Equipment List

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Calibration Due
Data acquisition electronics	SPEAG	DAE4	881	2025/10/15	2026/10/14
Dosimetric E-field Probes	SPEAG	ES3DV3	3089	2025/8/15	2026/8/14
SAR test software	SPEAG	DASY 52	52.10.3.1513	/	/
Dipole	SPEAG	D835V2	4d125	2025/8/1	2028/7/31
Dipole	SPEAG	D1750V2	1057	2025/8/1	2028/7/31
Dipole	SPEAG	D1900V2	5d145	2025/8/4	2028/8/3
Dipole	SPEAG	D2600V2	1232	2025/8/4	2028/8/3
Communication test set	R&S	CMW500	102698	2026/5/15	2027/5/14
Network analyzer	R&S	ZVB 8	100348	2026/5/26	2027/5/25
Dielectric Assessment Kit	SPEAG	DAK-3.5	0004	/	/
power meter	Agilent	E4419B	GB42421440	2026/5/15	2027/5/14
Signal Generator	Agilent	N5181A	MY49060920	2026/5/14	2027/5/13
RF Power Meter	Agilent	E9301A	US39210535	2026/5/15	2027/5/14
RF Power Meter	Agilent	E9304A	MY41490462	2026/5/15	2027/5/14
Amplifier 300-4200MHz	SHW	SHWPA-00300420P3040-S	22110401	2026/5/14	2027/5/13
Coupler 500-2000MHz	SHW	SHWCP-00500200-20N	202211090001	2026/5/14	2027/5/13
Coupler 2-18GHz	SHW	SHWCP-02001800-20S	202211090001	2026/5/14	2027/5/13
Thermometer and Hygrometer	SMART SENSOR	AR867	/	2026/5/26	2027/5/25
Phantom(S)	SPEAG	SAM 1	TP-1119	/	/
Phantom(S)	SPEAG	SAM 2	TP-1410	/	/

3.2 Test Equipment Calibration

All the test equipments used are valid and calibrated by Schmid & PartnerEngineering and NACC.
FCC Test Firm Registration Number: CN1276e
IC Registered No.:25587

4 SAR Introduction

4.1 Introduction

This measurement report shows compliance of the EUT with ANSI/IEEE C95.1-2019 and FCC 47 CFR Part2 (2.1093). The test procedures, as described in IEEE 1528-2013 Standard for IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques(300MHz~6GHz) and Published RF Exposure KDB Procedures

4.2 SAR Definition

- SAR : Specific Absorption Rate
- The SAR characterize the absorption of energy by a quantity of tissue
- This is related to a increase of the temperature of these tissues during a time period.

$$DAS = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

$$DAS = \frac{\sigma E^2}{\rho}$$

$$DAS = c_h \left. \frac{dT}{dt} \right|_{t=0}$$

SAR definition

$$SAR = \frac{\sigma E^2}{\rho}$$

- SAR : Specific Absorption Rate

- σ : Liquid conductivity

$$\circ \epsilon_r = \epsilon' - j\epsilon'' \text{ (complex permittivity of liquid)}$$

$$\circ \sigma = \frac{\epsilon'' \omega}{\epsilon_0}$$

- ρ : Liquid density

$$\circ \rho = 1000 \text{ g/L} = 1000 \text{ Kg/m}^3$$

where:

σ = conductivity of the tissue (S/m)
 ρ = mass density of the tissue (kg/m³)
 E = rms electric field strength (V/m)

5 SAR Measurement Setup

5.1 SAR MEASUREMENT SETUP

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD- conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE.

The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2018.


DASY5 software and SEMCAD data evaluation software.

Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc. The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld Mobile Phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

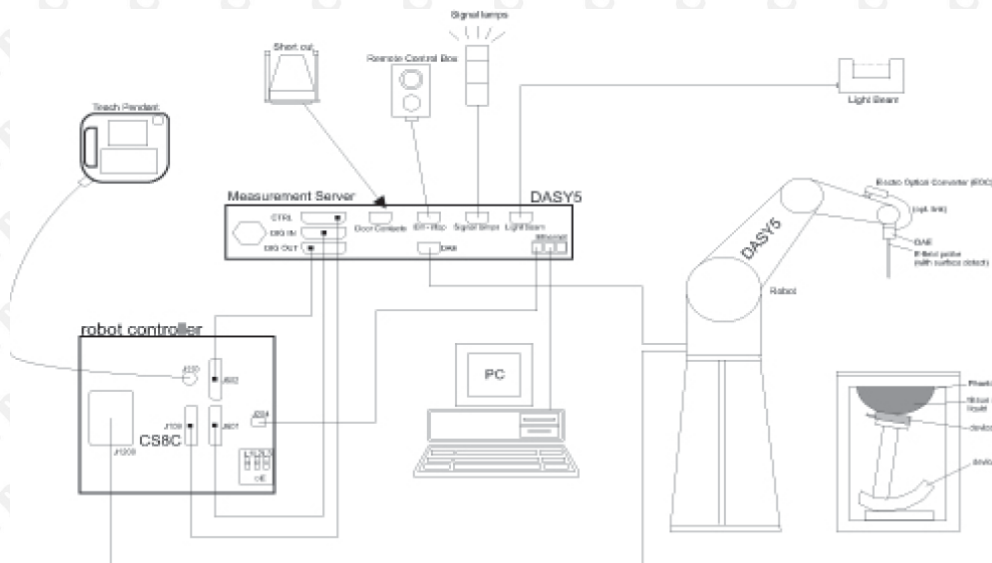

5.2 DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

5.3 Probe Specification

Construction Symmetrical design with triangular core
Interleaved sensors

Built-in shielding against static charges

PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration ISO/IEC 17025 calibration service available.

Frequency 4 MHz – 10 GHz

Linearity: ± 0.2 dB (30 MHz – 10 GHz)

Directivity ± 0.1 dB in TSL (rotation around probe axis)

± 0.3 dB in TSL (rotation normal to probe axis)

Dynamic Range 10 μ W/g – >100 W/kg

Linearity: ± 0.2 dB (noise: typically <1 μ W/g)

Dimensions Overall length: 337 mm (tip: 20 mm)
Tip diameter: 2.5 mm (body: 12 mm)
Typical distance from probe tip to dipole centers: 1 mm

Application General dosimetry up to 10 GHz
Dosimetry in strong gradient fields
Compliance tests of Mobile Phones


Compatibility DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



5.4 Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

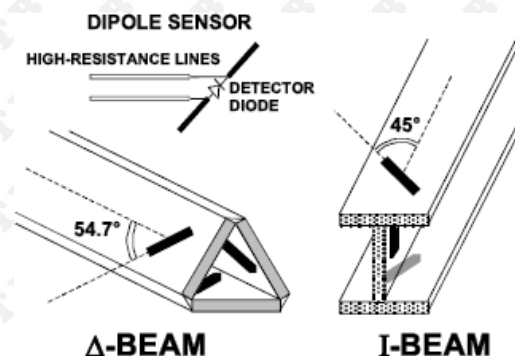

5.5 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

5.6 Device Holder



SAM Twin Phantom

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

6 SAR Test Procedure

6.1 Scanning Procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. $\pm 5\%$.

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)

Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of $15\text{ mm} \times 15\text{ mm}$ is set. During the scan the distance of the probe to the phantom remains unchanged. After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

Zoom Scan

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by $7 \times 7 \times 5$ points within a cube whose base is centered around the maxima found in the preceding area scan.

Spatial Peak Detection

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as: • maximum search • extrapolation • boundary correction • peak search for averaged SAR. During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.

Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using $7 \times 7 \times 5$ measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube $7 \times 7 \times 5$ scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [W/kg], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity:	Normi, ai0, ai1, ai2
	Conversion factor:	ConvFi
	Diode compression point:	Dcpi
Device parameters:	Frequency:	f
	Crest factor:	cf
Media parameters:	Conductivity:	σ
	Density:	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Vi: compensated signal of channel (i = x, y, z) Ui: input signal of channel (i = x, y, z)

cf: crest factor of exciting field (DASY parameter) dcp_i: diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H - \text{fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

Vi: compensated signal of channel (i = x, y, z) Normi: sensor sensitivity of channel (i = x, y, z), [mV/(V/m)²] for E-field Probes ConvF: sensitivity enhancement in solution

aij: sensor sensitivity factors for H-field probes f: carrier frequency [GHz]

Ei: electric field strength of channel i in V/m Hi: magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

SAR: local specific absorption rate in W/kg E_{tot} :

σ : conductivity in [mho/m] or [Siemens/m] ρ :

total field strength in V/m

equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

6.2 Extrapolation

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.

They are used in the Cube Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the fourth order least square polynomial method for extrapolation. For a grid using 5x5x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1 g and 10 g cubes.

6.3 Test Position – Body Configurations

Body Worn Position

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 0 cm or holster surface and the flat phantom to 0 cm.

7 Exposure limit

In order for users to be aware of the body-worn operating requirements for meeting RF exposure compliance, operating instructions and cautions statements are included in the user's manual.

7.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 8.1 Human Exposure Limits

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR ¹ Brain	1.60	8.00
SPATIAL AVERAGE SAR ² Whole Body	0.08	0.40
SPATIAL PEAK SAR ³ Hands, Feet, Ankles, Wrists	4.00	20.00


¹ The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

² The Spatial Average value of the SAR averaged over the whole body.

³ The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

8 System and liquid validation

8.1 System validation

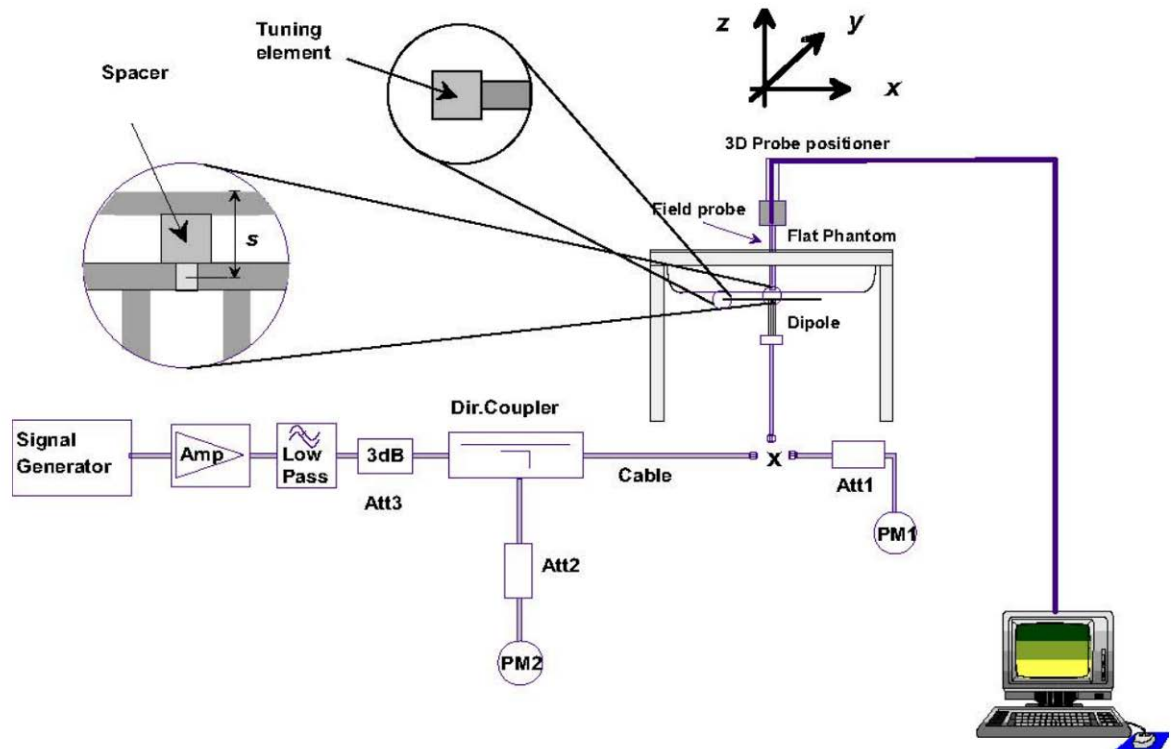

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

The output power on dipole port must be calibrated to 20 dBm (100 mW) before dipole is connected.

Numerical reference SAR values (W/kg) for reference dipole and flat phantom

Frequency (MHz)	1g SAR	10g SAR	Local SAR at surface(above feed-point)	Local SAR at surface(y = 2 cm offset from feedpoint)
300	3.02	2.04	4.40	2.10
450	4.92	3.28	7.20	3.20
750	8.49	5.55	12.6	4.59
835	9.56	6.22	14.1	4.90
900	10.9	6.99	16.4	5.40
1450	29.0	16.0	50.2	6.50
1800	38.4	20.1	69.5	6.80
1900	39.7	20.5	72.1	6.60
2000	41.1	21.1	74.6	6.50
2450	52.4	24.0	104	7.70
2600	55.3	24.6	113	8.29
3000	63.8	25.7	140	9.50

Table 1: system validation (1g)

Measurement Date	Frequency (MHz)	Liquid Type (head/body)	Target SAR1g (W/kg)	Measured SAR1g (W/kg)	Normalized SAR1g (W/kg)	Deviation (±10%)
2026/8/7	835	head	9.57	0.919	9.19	-3.97
2026/8/11	1750	head	36.5	3.35	33.5	-8.22
2026/8/12	1750	head	36.5	3.98	39.8	9.04
2026/8/8	1900	head	39.8	3.82	38.2	-4.02
2026/8/9	2600	head	55.7	5.61	56.1	0.72
2026/8/10	2600	head	55.7	5.4	54	-3.05

8.2 liquid validation

The dielectric parameters were checked prior to assessment using the HP85070C dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

KDB 865664 recommended Tissue Dielectric Parameters

The head and body tissue parameters given in this below table should be used to measure the SAR of transmitters operating in 100 MHz to 6 GHz frequency range. The tissue dielectric parameters of the tissue medium at the test frequency should be within the tolerance required in this document. The dielectric parameters should be linearly interpolated between the closest pair of target frequencies to determine the applicable dielectric parameters corresponding to the device test frequency.

The head tissue dielectric parameters recommended by IEEE Std 1528-2013 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in 1528 are derived from tissue dielectric parameters computed from the 4-Cole-Cole equations described above and extrapolated according to the head parameters specified in 1528.

Target Frequency	Head/Body Tissue	
MHz	ϵ_r	σ (S/m)
150	52.3	0.76
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
915	41.5	0.98
1450	40.5	1.20
1610	40.3	1.29
1800-2000	40.0	1.40
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
5800	35.3	5.27

8.3 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness Power drifts in a human head.

Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Table 2: Recommended Dielectric Performance of Tissue

Recommended Dielectric Performance of Tissue												
Ingredients (% by weight)	Frequency (MHz)											
	750		835		1800		1900		2450		2600	
Tissue	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	40.52	51.83	41.45	52.4	55.2	70.2	54.9	40.4	62.7	73.2	54.8	68.1
Salt (NaCl)	1.61	1.52	1.45	1.4	0.3	0.4	0.18	0.5	0.5	0.04	0.1	0.01
Sugar	57.67	46.45	56.0	45.0	0.0	0.0	0.0	58.0	0.0	0.0	0.0	0.0
HEC	0.1	0.1	1.0	1.0	0.0	0.0	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0	0.0	0.0
DGBE	0.0	0.0	0.0	0.0	44.5	29.4	44.92	0.0	0.0	26.7	45.1	31.8
Dielectric	40.93	54.32	42.54	56.1	40.0	53.3	39.9	54.0	39.8	52.5	39.0	52.5
Conductivity	0.87	0.95	0.91	0.95	1.40	1.52	1.42	1.45	1.88	1.78	1.96	2.15

Table 3: Dielectric Performance of Head Tissue Simulating Liquid

Temperature: 21°C , Relative humidity: 57%				
Frequency(MHz)	Measured Date	Description	Dielectric Parameters	
			ϵ_r	$\sigma(s/m)$
2026/8/7	835	Target Value $\pm 5\%$ window	41.5 39.425 — 43.575	0.90 0.855 — 0.945
		Measurement Value	41.154	0.883
2026/8/11	1750	Target Value $\pm 5\%$ window	40.1 38.095 — 42.105	1.37 1.302 — 1.439
		Measurement Value	40.254	1.364
2026/8/12	1750	Target Value $\pm 5\%$ window	40.1 38.095 — 42.105	1.37 1.302 — 1.439
		Measurement Value	40.257	1.369
2026/8/8	1900	Target Value $\pm 5\%$ window	40.0 38.00 — 42.00	1.40 1.33 — 1.47
		Measurement Value	40.055	1.412
2026/8/9	2600	Target Value $\pm 5\%$ window	39.0 37.05 — 40.95	1.96 1.862 — 2.058
		Measurement Value	39.321	1.953
2026/8/10	2600	Target Value $\pm 5\%$ window	39.0 37.05 — 40.95	1.96 1.862 — 2.058
		Measurement Value	39.023	1.942

9 System Verification Plots

Date/Time: 2026/8/7 0:25:53

System Check-835

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN: 4d125

Communication System: UID 0, CW (0); Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 41.154$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.09, 6.09, 6.09) @ 835 MHz; Calibrated: 2025/8/15

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2025/10/15

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 835MHz/d=10mm, Pin=100mW, dist=4.0mm (ES-Probe)/Area Scan (7x19x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.983 W/kg

System Performance Check at 835MHz/d=10mm, Pin=100mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.18 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.919 W/kg; SAR(10 g) = 0.606 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 67.8%

Maximum value of SAR (measured) = 0.992 W/kg

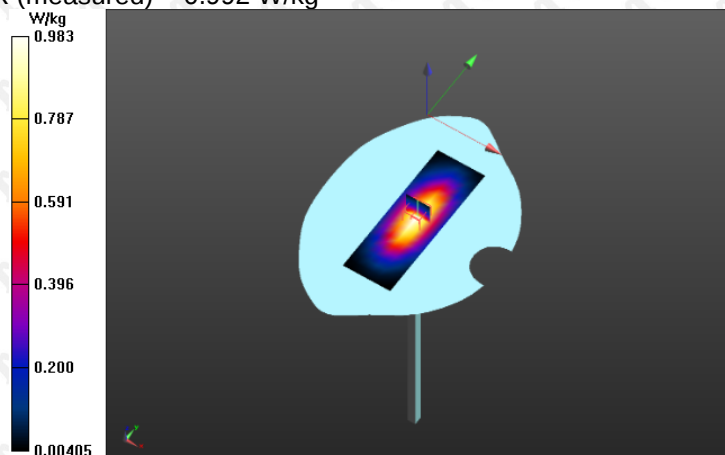

Date/Time: 2026/8/11 0:13:53

System Check-1750

DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1057

Communication System: UID 0, CW (0); Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 40.254$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(5.29, 5.29, 5.29) @ 1750 MHz; Calibrated: 2025/8/15

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2025/10/15

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 1750MHz/d=5mm, Pin=100mW, dist=4.0mm (ES-Probe)/Area Scan (7x11x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.75 W/kg

System Performance Check at 1750MHz/d=5mm, Pin=100mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.83 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 6.16 W/kg

SAR(1 g) = 3.35 W/kg; SAR(10 g) = 1.78 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 3.77 W/kg

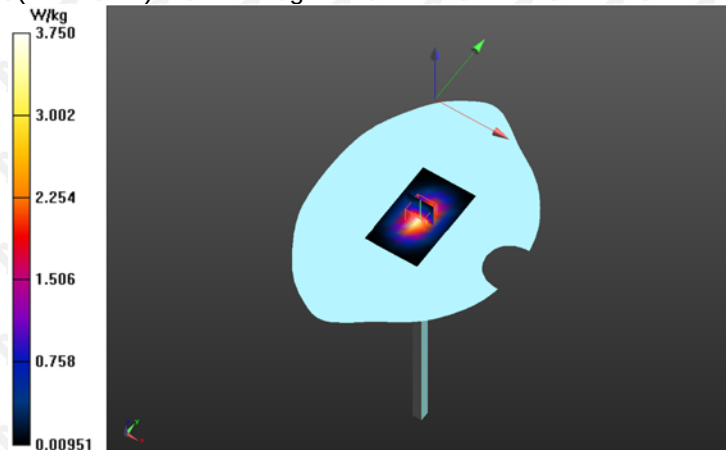

Date/Time: 2026/8/12 0:22:09

System Check-1750

DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1057

Communication System: UID 0, CW (0); Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 40.257$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(5.29, 5.29, 5.29) @ 1750 MHz; Calibrated: 2025/8/15

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2025/10/15

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 1750MHz/d=5mm, Pin=100mW, dist=4.0mm (ES-Probe)/Area Scan (7x11x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 4.55 W/kg

System Performance Check at 1750MHz/d=5mm, Pin=100mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.16 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 7.35 W/kg

SAR(1 g) = 3.98 W/kg; SAR(10 g) = 2.12 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 56.5%

Maximum value of SAR (measured) = 4.51 W/kg

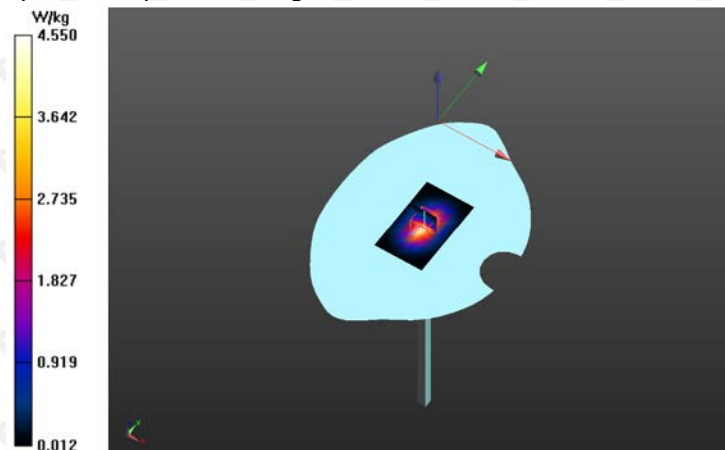

Date/Time: 2026/8/8 0:17:30

System Check-1900

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN: 5d145

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.055$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(5, 5, 5) @ 1900 MHz; Calibrated: 2025/8/15

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2025/10/15

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 1900MHz/d=5mm, Pin=100mW, dist=4.0mm (ES-Probe)/Area Scan (7x11x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 4.12 W/kg

System Performance Check at 1900MHz/d=5mm, Pin=100mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.06 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 7.24 W/kg

SAR(1 g) = 3.82 W/kg; SAR(10 g) = 1.98 W/kg

Smallest distance from peaks to all points 3 dB below = 12.7 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 4.30 W/kg

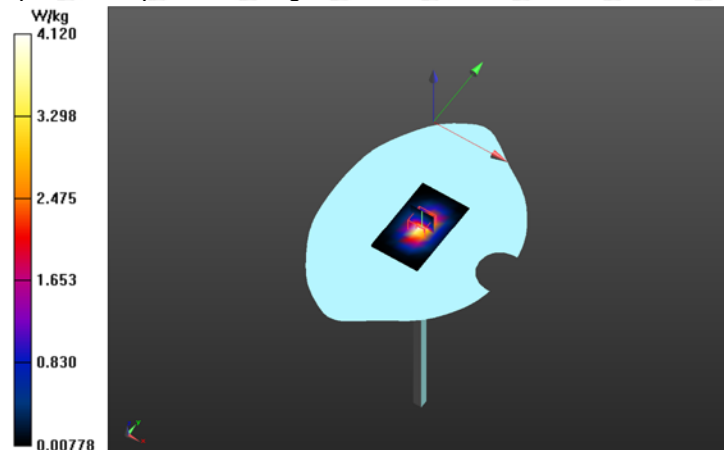

Date/Time: 2026/8/9 0:19:39

System Check-2600

DUT: D2600V2 - SN1232; Type: D2600V2; Serial: SN1232

Communication System: UID 0, CW (0); Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.953$ S/m; $\epsilon_r = 39.321$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.42, 4.42, 4.42) @ 2600 MHz; Calibrated: 2025/8/15

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2025/10/15

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 2600MHz/d=5mm, Pin=100mW, dist=4.0mm (ES-Probe)/Area Scan (7x11x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 6.23 W/kg

System Performance Check at 2600MHz/d=5mm, Pin=100mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.20 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 14.3 W/kg

SAR(1 g) = 5.61 W/kg; SAR(10 g) = 2.35 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 40.1%

Maximum value of SAR (measured) = 6.24 W/kg

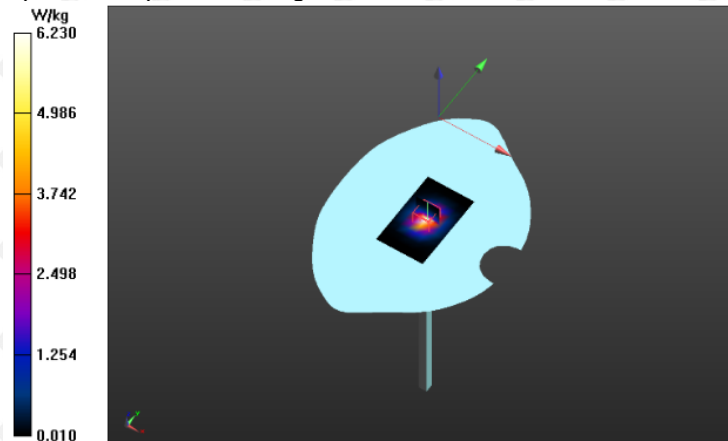

Date/Time: 2026/8/10 0:18:43

System Check-2600

DUT: D2600V2 - SN1232; Type: D2600V2; Serial: SN1232


Communication System: UID 0, CW (0); Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used: $f = 2600$ MHz; $\sigma = 1.942$ S/m; $\epsilon_r = 39.023$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.42, 4.42, 4.42) @ 2600 MHz; Calibrated: 2025/8/15
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2025/10/15
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 2600MHz/d=5mm, Pin=100mW, dist=4.0mm (ES-Probe)/Area Scan (7x11x1):
Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 6.04 W/kg

System Performance Check at 2600MHz/d=5mm, Pin=100mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 55.15 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 13.7 W/kg
SAR(1 g) = 5.4 W/kg; SAR(10 g) = 2.26 W/kg
Smallest distance from peaks to all points 3 dB below = 10 mm
Ratio of SAR at M2 to SAR at M1 = 40.3%
Maximum value of SAR (measured) = 6.01 W/kg

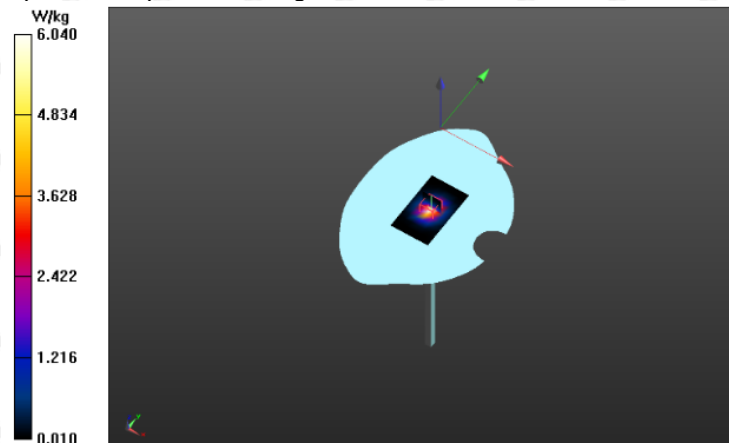

10 Type a Measurement Uncertainty

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table below :

Uncertainty Distribution	Normal	Rectangle	Triangular	U Shape
Multi-multiplying Factor(a)	$1/k(b)$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B -sum- by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %.

The COMOSAR Uncertainty Budget is shown in the table below:

DASY5 Uncertainty Measurement uncertainty for 300MHz to 3GHz averaged over 1 gram/ 10 gram								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) vef f
Measurement System								
Probe Calibration	±6.0 %	N	1	1	1	±6.0 %	±6.0 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Modulation Responsem	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.4 %	R	√3	1	1	±0.2 %	±0.2 %	∞
Probe Positioning	±2.9 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Max. SAR Eval.	±2.0 %	R	√3	1	1	±1.2 %	±1.2 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
Power Scalingp	±0 %	R	√3	1	1	±0.0 %	±0.0 %	∞
Phantom and Setup								
Phantom Uncertainty	±6.1 %	R	√3	1	1	±3.5 %	±3.5 %	∞
SAR correction	±1.9 %	R	√3	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.)DAK	±2.5 %	R	√3	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) DAK	±2.5 %	R	√3	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity BB	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity BB	±0.4 %	R	√3	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±11.2 %	±11.1 %	361
Expanded STD Uncertainty						±22.3 %	±22.2 %	

11 Output Power Verification

11.1 Test Condition:

1. Conducted Measurement
EUT was set for low, mid, high channel with modulated mode and highest RF output power. The base station simulator was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is $\pm 1.5\text{dB}$.
3. Environmental Conditions

Temperature	23°C
Relative Humidity	53%
Atmospheric Pressure	1019mbar
4. Tested By : Andy Feng

11.2 Test Procedures:

Mobile Phone radio output power measurement

1. The transmitter output port was connected to base station emulator.
2. Establish communication link between emulator and EUT and set EUT to operate at maximum output power all the time.
3. Select lowest, middle, and highest channels for each band and different possible test mode.
4. Measure the conducted peak burst power and conducted average burst power from EUT antenna port.

Other radio output power measurement:

The output power was measured using power meter at low, mid, and hi channels.

LTE Power Reduction

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 2:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	18607	1850.7	QPSK	1	0	21.61	21.0±1	/
				1	2	21.70	21.0±1	/
				1	5	21.54	21.0±1	/
				3	0	21.69	21.0±1	/
				3	2	21.86	21.0±1	/
				6	0	20.90	20.0±1	1.0
			16QAM	1	0	21.49	21.0±1	/
				1	2	21.37	21.0±1	/
				1	5	21.34	21.0±1	/
				3	0	21.13	21.0±1	/
				3	2	20.92	20.0±1	1.0
				6	0	19.74	20.0±1	1.0
	18900	1880	QPSK	1	0	21.88	21.5±1	/
				1	2	22.10	21.5±1	/
				1	5	22.10	21.5±1	/
				3	0	21.67	21.5±1	/
				3	1	21.66	21.5±1	/
				6	0	20.76	20.5±1	1.0
			16QAM	1	0	20.71	20.0±1	/
				1	2	20.74	20.0±1	/
				1	5	20.30	20.0±1	/
				3	0	20.66	20.0±1	/
				3	2	20.57	20.0±1	/
				6	0	19.80	19.0±1	1.0
	19193	1909.3	QPSK	1	0	21.69	21.0±1	/
				1	2	21.52	21.0±1	/
				1	5	21.53	21.0±1	/
				3	0	21.39	21.0±1	/
				3	2	21.32	21.0±1	/
				6	0	20.43	20.0±1	1.0
			16QAM	1	0	20.68	20.0±1	/
				1	2	20.72	20.0±1	/
				1	5	20.57	20.0±1	/
				3	0	20.34	20.0±1	/
				3	2	20.30	20.0±1	/
				6	0	19.38	19.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	18615	1851.5	QPSK	1	0	21.74	21.0±1	/
				1	8	21.75	21.0±1	/
				1	14	21.67	21.0±1	/
				8	0	20.74	20.0±1	1.0
				8	9	20.75	20.0±1	1.0
				15	0	20.76	20.0±1	1.0
			16QAM	1	0	20.71	20.0±1	/
				1	8	20.61	20.0±1	/
				1	14	20.63	20.0±1	/
				8	0	19.72	19.0±1	1.0
				8	9	19.95	19.0±1	1.0
				15	0	19.64	19.0±1	1.0
	18900	1880	QPSK	1	0	21.79	21.0±1	/
				1	8	21.72	21.0±1	/
				1	14	21.54	21.0±1	/
				8	4	20.65	20.0±1	1.0
				8	9	20.74	20.0±1	1.0
				15	0	20.63	20.0±1	1.0
			16QAM	1	0	20.89	20.0±1	1.0
				1	8	20.90	20.0±1	1.0
				1	14	21.10	21.0±1	/
				8	0	20.13	20.0±1	1.0
				8	9	20.10	20.0±1	1.0
				15	0	19.89	20.0±1	1.0
	19185	1908.5	QPSK	1	0	21.65	21.0±1	/
				1	8	21.22	21.0±1	/
				1	14	21.24	21.0±1	/
				8	0	20.43	20.0±1	1.0
				8	9	20.42	20.0±1	1.0
				15	0	20.20	20.0±1	1.0
			16QAM	1	0	20.39	20.0±1	/
				1	8	19.73	19.0±1	1.0
				1	14	19.76	19.0±1	1.0
				8	0	19.49	19.0±1	1.0
				8	9	19.06	19.0±1	1.0
				15	0	19.28	19.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	18625	1852.5	QPSK	1	0	21.58	21.0±1	/
				1	12	21.70	21.0±1	/
				1	24	21.53	21.0±1	/
				12	0	20.76	20.0±1	1.0
				12	11	20.69	20.0±1	1.0
				25	0	20.74	20.0±1	1.0
			16QAM	1	0	20.64	20.0±1	/
				1	12	20.56	20.0±1	/
				1	24	20.20	20.0±1	/
				12	0	19.65	19.0±1	1.0
				12	11	19.55	19.0±1	1.0
				25	0	19.63	19.0±1	1.0
	18900	1880	QPSK	1	0	21.72	21.0±1	/
				1	12	21.74	21.0±1	/
				1	24	21.44	21.0±1	/
				12	0	20.80	20.0±1	1.0
				12	11	20.81	20.0±1	1.0
				25	0	20.69	20.0±1	1.0
			16QAM	1	0	20.82	20.0±1	/
				1	12	20.80	20.0±1	/
				1	24	20.91	20.0±1	/
				12	0	19.60	19.0±1	1.0
				12	11	19.55	19.0±1	1.0
				25	0	19.73	19.0±1	1.0
	19175	1907.5	QPSK	1	0	21.55	21.0±1	/
				1	12	21.43	21.0±1	/
				1	24	21.26	21.0±1	/
				12	0	20.33	20.0±1	1.0
				12	11	20.31	20.0±1	1.0
				25	0	20.31	20.0±1	1.0
			16QAM	1	0	20.35	20.0±1	/
				1	12	20.06	20.0±1	/
				1	24	20.21	20.0±1	/
				12	0	19.43	19.0±1	1.0
				12	11	19.17	19.0±1	1.0
				25	0	19.39	19.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	18650	1855	QPSK	1	0	21.70	21.0±1	/
				1	24	21.70	21.0±1	/
				1	49	21.50	21.0±1	/
				25	0	20.77	20.0±1	1.0
				25	24	20.79	20.0±1	1.0
				50	0	20.70	20.0±1	1.0
			16QAM	1	0	20.86	20.5±1	/
				1	24	21.45	20.5±1	/
				1	49	20.74	20.5±1	/
				25	0	19.80	19.5±1	1.0
				25	24	19.82	19.5±1	1.0
				50	0	19.77	19.5±1	1.0
	18900	1880	QPSK	1	0	22.05	21.5±1	/
				1	24	21.68	21.5±1	/
				1	49	21.73	21.5±1	/
				25	0	20.93	20.5±1	1.0
				25	24	20.76	20.5±1	1.0
				50	0	20.77	20.5±1	1.0
			16QAM	1	0	21.51	21.0±1	/
				1	24	21.45	21.0±1	/
				1	49	21.45	21.0±1	/
				25	0	20.03	20.0±1	1.0
				25	24	19.64	20.0±1	1.0
				50	0	19.82	20.0±1	1.0
	19150	1905	QPSK	1	0	22.00	21.0±1	/
				1	24	21.93	21.0±1	/
				1	49	21.38	21.0±1	/
				25	0	20.59	20.0±1	1.0
				25	24	20.30	20.0±1	1.0
				50	0	20.52	20.0±1	1.0
			16QAM	1	0	20.37	20.0±1	/
				1	24	20.16	20.0±1	/
				1	49	19.80	19.0±1	1.0
				25	0	19.72	19.0±1	1.0
				25	24	19.32	19.0±1	1.0
				50	0	19.48	19.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	18675	1857.5	QPSK	1	0	21.75	21.0±1	/
				1	37	21.77	21.0±1	/
				1	74	21.46	21.0±1	/
				36	0	20.80	20.0±1	1.0
				36	35	20.63	20.0±1	1.0
				75	0	20.73	20.0±1	1.0
			16QAM	1	0	20.94	20.0±1	1.0
				1	37	21.57	21.0±1	/
				1	74	20.69	20.0±1	1.0
				36	0	19.68	20.0±1	1.0
				36	35	19.71	20.0±1	1.0
				75	0	19.58	20.0±1	1.0
	18900	1880	QPSK	1	0	21.83	21.0±1	/
				1	37	21.62	21.0±1	/
				1	74	21.73	21.0±1	/
				36	0	20.77	20.0±1	1.0
				36	35	20.57	20.0±1	1.0
				75	0	20.69	20.0±1	1.0
			16QAM	1	0	20.95	20.5±1	/
				1	37	21.10	20.5±1	/
				1	74	21.23	20.5±1	/
				36	0	19.73	19.5±1	1.0
				36	35	19.45	19.5±1	1.0
				75	0	19.53	19.5±1	1.0
	19125	1902.5	QPSK	1	0	21.69	21.0±1	/
				1	37	21.28	21.0±1	/
				1	74	21.11	21.0±1	/
				36	0	20.68	20.0±1	1.0
				36	35	20.25	20.0±1	1.0
				75	0	20.45	20.0±1	1.0
			16QAM	1	0	20.20	19.5±1	/
				1	37	20.11	19.5±1	/
				1	74	18.84	18.5±1	1.0
				36	0	19.49	18.5±1	1.0
				36	35	19.16	18.5±1	1.0
				75	0	19.49	18.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	18700	1860	QPSK	1	0	21.64	21.0±1	/
				1	49	21.43	21.0±1	/
				1	99	21.24	21.0±1	/
				50	0	20.65	20.0±1	1.0
				50	24	20.53	20.0±1	1.0
				100	0	20.60	20.0±1	1.0
			16QAM	1	0	21.08	20.5±1	/
				1	49	21.09	20.5±1	/
				1	99	20.60	20.5±1	/
				50	0	19.72	19.5±1	1.0
				50	24	19.66	19.5±1	1.0
				100	0	19.66	19.5±1	1.0
	18900	1880	QPSK	1	0	21.91	21.0±1	/
				1	49	21.86	21.0±1	/
				1	99	21.79	21.0±1	/
				50	0	20.78	20.0±1	1.0
				50	24	20.62	20.0±1	1.0
				100	0	20.69	20.0±1	1.0
			16QAM	1	0	20.22	20.0±1	/
				1	49	20.18	20.0±1	/
				1	99	19.71	19.0±1	1.0
				50	0	19.82	19.0±1	1.0
				50	24	19.67	19.0±1	1.0
				100	0	19.79	19.0±1	1.0
	19100	1900	QPSK	1	0	22.10	21.5±1	/
				1	49	21.73	21.5±1	/
				1	99	21.14	20.5±1	1.0
				50	0	20.67	20.5±1	1.0
				50	24	20.49	20.5±1	1.0
				100	0	20.59	20.5±1	1.0
			16QAM	1	0	20.77	20.5±1	/
				1	49	21.04	20.5±1	/
				1	99	20.09	19.5±1	1.0
				50	0	19.75	19.5±1	1.0
				50	24	19.48	19.5±1	1.0
				100	0	19.57	19.5±1	1.0

LTE Band 4:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	19957	1710.7	QPSK	1	0	21.99	21.0±1	1.0
				1	2	22.13	22.0±1	/
				1	5	22.00	21.0±1	1.0
				3	0	21.75	21.0±1	1.0
				3	1	21.70	21.0±1	1.0
				6	0	20.92	21.0±1	1.0
			16QAM	1	0	21.06	21.0±1	/
				1	2	21.21	21.0±1	/
				1	5	21.01	21.0±1	/
				3	0	20.98	20.0±1	1.0
				3	2	20.87	20.0±1	1.0
				6	0	20.02	20.0±1	1.0
	20175	1732.5	QPSK	1	0	21.89	21.0±1	/
				1	2	21.95	21.0±1	/
				1	5	21.92	21.0±1	/
				3	0	21.82	21.0±1	/
				3	2	21.84	21.0±1	/
				6	0	21.01	21.0±1	/
			16QAM	1	0	21.30	21.0±1	/
				1	2	21.45	21.0±1	/
				1	5	21.37	21.0±1	/
				3	0	21.09	21.0±1	/
				3	2	21.17	21.0±1	/
				6	0	20.01	20.0±1	1.0
	20393	1754.3	QPSK	1	0	22.23	22.0±1	/
				1	2	22.34	22.0±1	/
				1	5	22.03	22.0±1	/
				3	0	22.02	22.0±1	/
				3	2	21.99	21.0±1	1.0
				6	0	21.16	21.0±1	1.0
			16QAM	1	0	21.14	21.0±1	/
				1	2	20.85	20.0±1	1.0
				1	5	20.72	20.0±1	1.0
				3	0	21.06	21.0±1	/
				3	2	21.10	21.0±1	/
				6	0	20.29	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	19965	1711.5	QPSK	1	0	21.58	21.0±1	/
				1	8	21.77	21.0±1	/
				1	14	21.72	21.0±1	/
				8	0	20.81	20.0±1	1.0
				8	4	20.87	20.0±1	1.0
				15	0	21.06	20.0±1	1.0
			16QAM	1	0	20.81	20.0±1	/
				1	8	20.88	20.0±1	/
				1	14	20.81	20.0±1	/
				8	0	19.91	19.0±1	1.0
				8	9	20.11	20.0±1	/
				15	0	19.82	19.0±1	1.0
	20175	1732.5	QPSK	1	0	21.91	21.5±1	/
				1	8	22.11	21.5±1	/
				1	14	22.18	21.5±1	/
				8	0	21.00	20.5±1	1.0
				8	4	20.95	20.5±1	1.0
				15	0	20.99	20.5±1	1.0
			16QAM	1	0	21.25	21.0±1	/
				1	8	21.63	21.0±1	/
				1	14	21.68	21.0±1	/
				8	0	19.84	20.0±1	1.0
				8	4	20.05	20.0±1	1.0
				15	0	19.83	20.0±1	1.0
	20385	1753.5	QPSK	1	0	22.01	21.5±1	/
				1	8	21.97	21.5±1	/
				1	14	22.09	21.5±1	/
				8	0	21.14	20.5±1	1.0
				8	9	21.07	20.5±1	1.0
				15	0	21.21	20.5±1	1.0
			16QAM	1	0	20.92	20.0±1	/
				1	8	20.74	20.0±1	/
				1	14	20.63	20.0±1	/
				8	0	20.34	20.0±1	/
				8	9	19.93	19.0±1	1.0
				15	0	20.19	20.0±1	/

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	19975	1712.5	QPSK	1	0	21.61	21.0±1	/
				1	49	21.90	21.0±1	/
				1	99	21.92	21.0±1	/
				12	0	20.96	20.0±1	1.0
				12	24	20.95	20.0±1	1.0
				25	0	20.97	20.0±1	1.0
			16QAM	1	0	20.77	20.0±1	/
				1	49	20.86	20.0±1	/
				1	99	20.67	20.0±1	/
				12	0	19.78	19.0±1	1.0
				12	24	19.81	19.0±1	1.0
				25	0	20.07	20.0±1	/
	20175	1732.5	QPSK	1	0	21.79	21.5±1	/
				1	49	22.13	21.5±1	/
				1	99	21.98	21.5±1	/
				12	0	21.03	20.5±1	1.0
				12	49	20.96	20.5±1	1.0
				25	0	20.96	20.5±1	1.0
			16QAM	1	0	21.15	20.5±1	/
				1	49	21.46	20.5±1	/
				1	99	21.18	20.5±1	/
				12	0	19.77	19.5±1	1.0
				12	24	19.77	19.5±1	1.0
				25	0	19.87	19.5±1	1.0
	20375	1752.5	QPSK	1	0	22.20	21.5±1	/
				1	49	22.25	21.5±1	/
				1	99	22.27	21.5±1	/
				12	0	21.39	20.5±1	1.0
				12	49	21.37	20.5±1	1.0
				25	0	21.32	20.5±1	1.0
			16QAM	1	0	21.19	21.0±1	/
				1	49	21.14	21.0±1	/
				1	99	21.15	21.0±1	/
				12	0	20.49	20.0±1	1.0
				12	49	20.14	20.0±1	1.0
				25	0	20.35	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20000	1715	QPSK	1	0	21.61	21.0±1	/
				1	49	21.94	21.0±1	/
				1	99	21.89	21.0±1	/
				25	0	21.06	21.0±1	/
				25	49	21.07	21.0±1	/
				50	0	21.09	21.0±1	/
			16QAM	1	0	20.86	20.0±1	1.0
				1	49	21.75	21.0±1	/
				1	99	20.74	20.0±1	1.0
				25	0	20.10	20.0±1	1.0
				25	49	20.15	20.0±1	1.0
				50	0	20.05	20.0±1	1.0
	20175	1732.5	QPSK	1	0	21.92	21.5±1	/
				1	49	22.31	21.5±1	/
				1	99	22.05	21.5±1	/
				25	0	20.99	20.5±1	1.0
				25	49	20.96	20.5±1	1.0
				50	0	20.97	20.5±1	1.0
			16QAM	1	0	21.71	21.5±1	/
				1	49	22.04	21.5±1	/
				1	99	22.09	21.5±1	/
				25	0	19.98	20.5±1	1.0
				25	49	20.20	20.5±1	1.0
				50	0	19.87	20.5±1	1.0
	20350	1750	QPSK	1	0	22.14	22.0±1	/
				1	49	22.28	22.0±1	/
				1	99	22.44	22.0±1	/
				25	0	21.20	21.0±1	1.0
				25	49	21.36	21.0±1	1.0
				50	0	21.36	21.0±1	1.0
			16QAM	1	0	20.94	20.5±1	/
				1	49	21.05	20.5±1	/
				1	99	20.81	20.5±1	/
				25	0	20.29	19.5±1	1.0
				25	49	20.27	19.5±1	1.0
				50	0	20.38	19.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	20025	1717.5	QPSK	1	0	21.67	21.5±1	/
				1	49	22.19	21.5±1	/
				1	99	21.95	21.5±1	/
				36	0	20.98	20.5±1	1.0
				36	49	21.15	20.5±1	1.0
				75	0	21.14	20.5±1	1.0
			16QAM	1	0	20.98	20.0±1	1.0
				1	49	22.00	21.0±1	/
				1	99	21.14	21.0±1	/
				36	0	20.10	20.0±1	1.0
				36	49	20.11	20.0±1	1.0
				75	0	20.17	20.0±1	1.0
	20175	1732.5	QPSK	1	0	21.92	21.0±1	/
				1	49	21.87	21.0±1	/
				1	99	21.99	21.0±1	/
				36	0	21.06	21.0±1	/
				36	49	20.92	20.0±1	1.0
				75	0	21.00	20.0±1	1.0
			16QAM	1	0	21.50	21.0±1	/
				1	49	21.37	21.0±1	/
				1	99	21.38	21.0±1	/
				36	0	19.72	20.0±1	1.0
				36	49	19.87	20.0±1	1.0
				75	0	19.97	20.0±1	1.0
	20325	1747.5	QPSK	1	0	22.04	22.0±1	/
				1	49	22.23	22.0±1	/
				1	99	22.30	22.0±1	/
				36	0	21.22	21.0±1	1.0
				36	49	21.30	21.0±1	1.0
				75	0	21.20	21.0±1	1.0
			16QAM	1	0	20.91	20.0±1	/
				1	49	20.85	20.0±1	/
				1	99	20.07	20.0±1	/
				36	0	20.16	20.0±1	/
				36	49	20.27	20.0±1	/
				75	0	20.32	20.0±1	/

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	20050	1720	QPSK	1	0	21.51	21.0±1	1.0
				1	49	22.28	22.0±1	/
				1	99	21.78	21.0±1	1.0
				50	0	21.06	21.0±1	1.0
				50	24	21.13	21.0±1	1.0
				100	0	21.16	21.0±1	1.0
			16QAM	1	0	21.06	21.0±1	/
				1	49	21.83	21.0±1	/
				1	99	20.77	20.0±1	1.0
				50	0	20.06	20.0±1	1.0
				50	24	20.17	20.0±1	1.0
				100	0	20.14	20.0±1	1.0
	20175	1732.5	QPSK	1	0	22.16	22.0±1	/
				1	49	22.13	22.0±1	/
				1	99	22.15	22.0±1	/
				50	0	20.98	21.0±1	1.0
				50	24	21.04	21.0±1	1.0
				100	0	20.94	21.0±1	1.0
			16QAM	1	0	20.58	20.0±1	/
				1	49	20.63	20.0±1	/
				1	99	20.77	20.0±1	/
				50	0	19.94	19.0±1	1.0
				50	24	20.04	20.0±1	/
				100	0	19.93	19.0±1	1.0
	20300	1745	QPSK	1	0	21.95	21.0±1	1.0
				1	49	22.43	22.0±1	/
				1	99	22.11	22.0±1	/
				50	0	21.20	21.0±1	1.0
				50	24	21.32	21.0±1	1.0
				100	0	21.19	21.0±1	1.0
			16QAM	1	0	21.00	21.0±1	/
				1	49	21.37	21.0±1	/
				1	99	21.15	21.0±1	/
				50	0	20.19	20.0±1	1.0
				50	24	20.29	20.0±1	1.0
				100	0	20.29	20.0±1	1.0

LTE Band 5:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	20407	824.7	QPSK	1	0	22.18	22.0±1	/
				1	2	22.36	22.0±1	/
				1	5	22.28	22.0±1	/
				3	0	21.95	21.0±1	1.0
				3	2	21.86	21.0±1	1.0
				6	0	20.96	21.0±1	1.0
			16QAM	1	0	21.16	21.0±1	/
				1	2	21.46	21.0±1	/
				1	5	21.16	21.0±1	/
				3	0	21.06	21.0±1	/
				3	2	21.11	21.0±1	/
				6	0	19.82	20.0±1	1.0
	20525	836.5	QPSK	1	0	22.02	22.0±1	/
				1	2	22.17	22.0±1	/
				1	5	21.99	21.0±1	1.0
				3	0	21.92	21.0±1	1.0
				3	2	21.97	21.0±1	1.0
				6	0	21.03	21.0±1	1.0
			16QAM	1	0	21.06	21.0±1	/
				1	2	21.32	21.0±1	/
				1	5	21.25	21.0±1	/
				3	0	20.95	20.0±1	1.0
				3	2	20.92	20.0±1	1.0
				6	0	20.05	20.0±1	1.0
	20634	848.3	QPSK	1	0	21.68	21.0±1	/
				1	2	21.75	21.0±1	/
				1	5	21.60	21.0±1	/
				3	0	21.71	21.0±1	/
				3	2	21.53	21.0±1	/
				6	0	20.86	20.0±1	1.0
			16QAM	1	0	20.79	20.0±1	/
				1	2	20.85	20.0±1	/
				1	5	20.48	20.0±1	/
				3	0	20.79	20.0±1	/
				3	2	20.75	20.0±1	/
				6	0	19.96	19.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	20415	825.5	QPSK	1	0	21.86	21.0±1	/
				1	8	21.70	21.0±1	/
				1	14	21.85	21.0±1	/
				8	0	20.98	20.0±1	1.0
				8	9	20.96	20.0±1	1.0
				15	0	21.06	21.0±1	/
			16QAM	1	0	20.90	20.0±1	/
				1	8	20.76	20.0±1	/
				1	14	20.58	20.0±1	/
				8	0	20.11	20.0±1	/
				8	9	20.08	20.0±1	/
				15	0	20.13	20.0±1	/
	20525	836.5	QPSK	1	0	21.84	21.5±1	/
				1	8	22.15	21.5±1	/
				1	14	22.26	21.5±1	/
				8	0	21.05	20.5±1	1.0
				8	9	21.03	20.5±1	1.0
				15	0	20.95	20.5±1	1.0
			16QAM	1	0	21.11	21.0±1	/
				1	8	21.72	21.0±1	/
				1	14	21.73	21.0±1	/
				8	0	19.87	20.0±1	1.0
				8	9	20.02	20.0±1	1.0
				15	0	19.68	20.0±1	1.0
	20635	847.5	QPSK	1	0	21.70	21.0±1	/
				1	8	21.90	21.0±1	/
				1	14	21.68	21.0±1	/
				8	0	20.94	20.0±1	1.0
				8	9	20.92	20.0±1	1.0
				15	0	20.88	20.0±1	1.0
			16QAM	1	0	20.61	20.0±1	/
				1	8	20.89	20.0±1	/
				1	14	20.59	20.0±1	/
				8	0	20.16	20.0±1	/
				8	9	20.25	20.0±1	/
				15	0	19.88	19.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	20425	826.5	QPSK	1	0	21.89	21.0±1	/
				1	49	21.93	21.0±1	/
				1	99	21.71	21.0±1	/
				12	0	21.02	21.0±1	/
				12	24	20.98	20.0±1	1.0
				25	0	21.04	21.0±1	/
			16QAM	1	0	20.87	20.0±1	/
				1	49	20.88	20.0±1	/
				1	99	20.58	20.0±1	/
				12	0	20.00	20.0±1	/
				12	24	19.94	19.0±1	1.0
				25	0	19.97	19.0±1	1.0
	20525	836.5	QPSK	1	0	21.86	21.5±1	/
				1	49	22.09	21.5±1	/
				1	99	21.80	21.5±1	/
				12	0	20.98	20.5±1	1.0
				12	24	21.04	20.5±1	1.0
				25	0	20.99	20.5±1	1.0
			16QAM	1	0	21.10	20.5±1	/
				1	49	21.44	20.5±1	/
				1	99	21.09	20.5±1	/
				12	0	19.73	19.5±1	1.0
				12	49	19.80	19.5±1	1.0
				25	0	19.85	19.5±1	1.0
	20625	846.5	QPSK	1	0	21.72	21.0±1	/
				1	49	21.80	21.0±1	/
				1	99	21.69	21.0±1	/
				12	0	20.91	20.0±1	1.0
				12	49	20.91	21.0±1	1.0
				25	0	20.85	21.0±1	1.0
			16QAM	1	0	20.76	20.0±1	/
				1	49	20.98	20.0±1	/
				1	99	20.60	20.0±1	/
				12	0	19.73	19.0±1	1.0
				12	49	19.86	19.0±1	1.0
				25	0	19.75	19.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20450	829	QPSK	1	0	21.79	21.0±1	/
				1	49	21.88	21.0±1	/
				1	99	21.80	21.0±1	/
				25	0	20.99	20.0±1	1.0
				25	49	21.05	21.0±1	/
				50	0	21.09	21.0±1	/
			16QAM	1	0	21.11	21.0±1	/
				1	49	21.30	21.0±1	/
				1	99	20.58	20.0±1	1.0
				25	0	20.02	20.0±1	1.0
				25	49	20.11	20.0±1	1.0
				50	0	20.10	20.0±1	1.0
	20525	836.5	QPSK	1	0	21.90	21.0±1	1.0
				1	49	22.20	22.0±1	/
				1	99	21.82	21.0±1	1.0
				25	0	21.02	21.0±1	1.0
				25	49	21.04	21.0±1	1.0
				50	0	21.03	21.0±1	1.0
			16QAM	1	0	21.22	20.5±1	1.0
				1	49	22.16	21.5±1	/
				1	99	21.66	21.5±1	/
				25	0	19.95	20.5±1	1.0
				25	49	20.16	20.5±1	1.0
				50	0	19.90	20.5±1	1.0
	20600	844	QPSK	1	0	21.69	21.0±1	/
				1	49	21.99	21.0±1	/
				1	99	21.67	21.0±1	/
				25	0	20.95	20.0±1	1.0
				25	49	20.90	20.0±1	1.0
				50	0	21.00	20.0±1	1.0
			16QAM	1	0	20.49	20.0±1	/
				1	49	20.81	20.0±1	/
				1	99	20.30	20.0±1	/
				25	0	19.97	19.0±1	1.0
				25	49	19.87	19.0±1	1.0
				50	0	19.96	19.0±1	1.0

LTE Band 7:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	20775	2502.5	QPSK	1	0	22.07	22.0±1	/
				1	49	22.16	22.0±1	/
				1	99	22.06	22.0±1	/
				12	0	21.40	21.0±1	1.0
				12	24	21.44	21.0±1	1.0
				25	0	21.36	21.0±1	1.0
			16QAM	1	0	21.36	21.0±1	/
				1	49	21.89	21.0±1	/
				1	99	21.49	21.0±1	/
				12	0	20.02	20.0±1	1.0
				12	49	20.13	20.0±1	1.0
				25	0	20.18	20.0±1	1.0
	21100	2535	QPSK	1	0	22.17	22.0±1	/
				1	49	22.33	22.0±1	/
				1	99	22.51	22.0±1	/
				12	0	21.38	21.0±1	1.0
				12	49	21.46	21.0±1	1.0
				25	0	21.43	21.0±1	1.0
			16QAM	1	0	21.25	21.0±1	/
				1	49	21.27	21.0±1	/
				1	99	21.22	21.0±1	/
				12	0	20.35	20.0±1	1.0
				12	49	20.52	20.0±1	1.0
				25	0	20.51	20.0±1	1.0
	21425	2567.5	QPSK	1	0	22.20	22.0±1	/
				1	49	22.28	22.0±1	/
				1	99	22.30	22.0±1	/
				12	0	21.24	21.0±1	1.0
				12	49	21.30	21.0±1	1.0
				25	0	21.19	21.0±1	1.0
			16QAM	1	0	21.18	21.0±1	/
				1	49	21.22	21.0±1	/
				1	99	20.92	20.0±1	1.0
				12	0	20.35	20.0±1	1.0
				12	49	20.31	20.0±1	1.0
				25	0	20.18	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20800	2505	QPSK	1	0	22.10	22.0±1	/
				1	49	22.40	22.0±1	/
				1	99	22.21	22.0±1	/
				25	0	21.43	21.0±1	1.0
				25	24	21.46	21.0±1	1.0
				50	0	21.47	21.0±1	1.0
			16QAM	1	0	21.43	20.5±1	1.0
				1	49	22.12	21.5±1	/
				1	99	21.30	20.5±1	1.0
				25	0	20.55	20.5±1	1.0
				25	24	20.59	20.5±1	1.0
				50	0	20.49	20.5±1	1.0
	21100	2535	QPSK	1	0	22.28	22.0±1	/
				1	49	22.57	22.0±1	/
				1	99	22.52	22.0±1	/
				25	0	21.49	21.0±1	1.0
				25	24	21.48	21.0±1	1.0
				50	0	21.50	21.0±1	1.0
			16QAM	1	0	22.17	22.0±1	/
				1	49	22.55	22.0±1	/
				1	99	21.97	21.0±1	1.0
				25	0	20.54	21.0±1	1.0
				25	24	20.71	21.0±1	1.0
				50	0	20.51	21.0±1	1.0
	21400	2565	QPSK	1	0	22.49	22.0±1	/
				1	49	22.77	22.0±1	/
				1	99	22.32	22.0±1	/
				25	0	21.42	21.0±1	1.0
				25	24	21.40	21.0±1	1.0
				50	0	21.46	21.0±1	1.0
			16QAM	1	0	21.10	21.0±1	/
				1	49	21.40	21.0±1	/
				1	99	20.81	20.0±1	1.0
				25	0	20.50	20.0±1	1.0
				25	24	20.35	20.0±1	1.0
				50	0	20.41	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	20825	2507.5	QPSK	1	0	22.27	22.0±1	/
				1	49	22.49	22.0±1	/
				1	99	22.19	22.0±1	/
				36	0	21.51	21.0±1	1.0
				36	49	21.50	21.0±1	1.0
				75	0	21.46	21.0±1	1.0
			16QAM	1	0	21.46	21.0±1	/
				1	49	21.48	21.0±1	/
				1	99	20.85	20.0±1	1.0
				36	0	20.40	20.0±1	1.0
				36	49	20.43	20.0±1	1.0
				75	0	20.40	20.0±1	1.0
	21100	2535	QPSK	1	0	22.27	22.0±1	/
				1	49	22.45	22.0±1	/
				1	99	22.55	22.0±1	/
				36	0	21.53	21.0±1	1.0
				36	49	21.63	21.0±1	1.0
				75	0	21.51	21.0±1	1.0
			16QAM	1	0	21.97	21.0±1	1.0
				1	49	22.20	22.0±1	/
				1	99	22.35	22.0±1	/
				36	0	20.38	21.0±1	1.0
				36	49	20.67	21.0±1	1.0
				75	0	20.43	21.0±1	1.0
	21375	2562.5	QPSK	1	0	22.50	22.0±1	/
				1	49	22.52	22.0±1	/
				1	99	22.08	22.0±1	/
				36	0	21.61	21.0±1	1.0
				36	49	21.38	21.0±1	1.0
				75	0	21.51	21.0±1	1.0
			16QAM	1	0	21.21	21.0±1	/
				1	49	21.03	21.0±1	/
				1	99	20.56	20.0±1	1.0
				36	0	20.53	20.0±1	1.0
				36	49	20.27	20.0±1	1.0
				75	0	20.48	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	20850	2510	QPSK	1	0	22.29	22.0±1	/
				1	49	22.61	22.0±1	/
				1	99	22.09	22.0±1	/
				50	0	21.52	21.0±1	1.0
				50	24	21.46	21.0±1	1.0
				100	0	21.43	21.0±1	1.0
			16QAM	1	0	21.78	21.0±1	1.0
				1	49	22.15	22.0±1	/
				1	99	21.53	21.0±1	1.0
				50	0	20.49	21.0±1	1.0
				50	24	20.48	21.0±1	1.0
				100	0	20.44	21.0±1	1.0
	21100	2535	QPSK	1	0	22.44	22.0±1	/
				1	49	22.97	22.0±1	/
				1	99	22.79	22.0±1	/
				50	0	21.55	21.0±1	1.0
				50	24	21.67	21.0±1	1.0
				100	0	21.57	21.0±1	1.0
			16QAM	1	0	21.22	21.0±1	/
				1	49	20.94	20.0±1	1.0
				1	99	20.64	20.0±1	1.0
				50	0	20.58	20.0±1	1.0
				50	24	20.59	20.0±1	1.0
				100	0	20.43	20.0±1	1.0
	21350	2560	QPSK	1	0	22.49	22.0±1	/
				1	49	22.67	22.0±1	/
				1	99	22.29	22.0±1	/
				50	0	21.63	21.0±1	1.0
				50	24	21.46	21.0±1	1.0
				100	0	21.18	21.0±1	1.0
			16QAM	1	0	21.72	21.0±1	/
				1	49	21.36	21.0±1	/
				1	99	21.17	21.0±1	/
				50	0	20.54	20.0±1	1.0
				50	24	20.23	20.0±1	1.0
				100	0	20.43	20.0±1	1.0

LTE Band 38:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	37775	2572.5	QPSK	1	0	22.09	22.0±1	/
				1	49	22.16	22.0±1	/
				1	99	22.17	22.0±1	/
				12	0	21.33	21.0±1	1.0
				12	49	21.32	21.0±1	1.0
				25	0	21.27	21.0±1	1.0
			16QAM	1	0	21.12	21.0±1	/
				1	49	21.26	21.0±1	/
				1	99	20.92	20.0±1	1.0
				12	0	20.16	20.0±1	1.0
				12	49	20.13	20.0±1	1.0
				25	0	20.14	20.0±1	1.0
	38000	2595	QPSK	1	0	22.23	22.0±1	/
				1	49	22.18	22.0±1	/
				1	99	22.12	22.0±1	/
				12	0	21.56	21.0±1	1.0
				12	49	21.47	21.0±1	1.0
				25	0	21.48	21.0±1	1.0
			16QAM	1	0	22.00	21.0±1	/
				1	49	21.79	21.0±1	/
				1	99	21.98	21.0±1	/
				12	0	20.27	20.0±1	1.0
				12	49	20.19	20.0±1	1.0
				25	0	20.29	20.0±1	1.0
	38225	2617.5	QPSK	1	0	21.90	21.0±1	/
				1	49	21.93	21.0±1	/
				1	99	21.89	21.0±1	/
				12	0	21.04	21.0±1	/
				12	49	21.02	21.0±1	/
				25	0	21.12	21.0±1	/
			16QAM	1	0	21.18	20.5±1	/
				1	49	20.96	20.5±1	/
				1	99	21.20	20.5±1	/
				12	0	19.78	19.5±1	1.0
				12	49	19.77	19.5±1	1.0
				25	0	19.96	19.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	37800	2575	QPSK	1	0	22.29	22.0±1	/
				1	49	22.27	22.0±1	/
				1	99	22.41	22.0±1	/
				25	0	21.39	21.0±1	1.0
				25	49	21.45	21.0±1	1.0
				50	0	21.41	21.0±1	1.0
			16QAM	1	0	21.61	21.0±1	/
				1	49	21.77	21.0±1	/
				1	99	21.45	21.0±1	/
				25	0	20.20	20.0±1	1.0
				25	49	20.19	20.0±1	1.0
				50	0	20.23	20.0±1	1.0
	38000	2595	QPSK	1	0	22.55	22.0±1	/
				1	49	22.48	22.0±1	/
				1	99	22.47	22.0±1	/
				25	0	21.55	21.0±1	1.0
				25	49	21.48	21.0±1	1.0
				50	0	21.57	21.0±1	1.0
			16QAM	1	0	22.16	21.5±1	/
				1	49	22.36	21.5±1	/
				1	99	21.97	21.5±1	/
				25	0	20.44	20.5±1	1.0
				25	49	20.37	20.5±1	1.0
				50	0	20.42	20.5±1	1.0
	38200	2615	QPSK	1	0	22.09	22.0±1	/
				1	49	21.86	21.0±1	1.0
				1	99	21.93	21.0±1	1.0
				25	0	21.16	21.0±1	1.0
				25	49	21.05	21.0±1	1.0
				50	0	21.20	21.0±1	1.0
			16QAM	1	0	21.19	21.0±1	/
				1	49	21.41	21.0±1	/
				1	99	21.13	21.0±1	/
				25	0	20.23	20.0±1	1.0
				25	49	20.23	20.0±1	1.0
				50	0	20.14	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	37825	2577.5	QPSK	1	0	22.29	22.0±1	/
				1	49	22.27	22.0±1	/
				1	99	22.45	22.0±1	/
				36	0	21.36	21.0±1	1.0
				36	49	21.47	21.0±1	1.0
				75	0	21.42	21.0±1	1.0
			16QAM	1	0	21.52	21.0±1	/
				1	49	21.27	21.0±1	/
				1	99	21.40	21.0±1	/
				36	0	20.26	20.0±1	1.0
				36	49	20.38	20.0±1	1.0
				75	0	20.38	20.0±1	1.0
	38000	2595	QPSK	1	0	22.55	22.0±1	/
				1	49	22.44	22.0±1	/
				1	99	22.42	22.0±1	/
				36	0	21.57	21.0±1	1.0
				36	49	21.44	21.0±1	1.0
				75	0	21.51	21.0±1	1.0
			16QAM	1	0	22.24	21.5±1	/
				1	49	22.13	21.5±1	/
				1	99	22.04	21.5±1	/
				36	0	20.57	20.5±1	1.0
				36	49	20.53	20.5±1	1.0
				75	0	20.48	20.5±1	1.0
	38175	2612.5	QPSK	1	0	22.28	22.0±1	/
				1	49	21.96	21.0±1	1.0
				1	99	21.98	21.0±1	1.0
				36	0	21.27	21.0±1	1.0
				36	49	21.10	21.0±1	1.0
				75	0	21.19	21.0±1	1.0
			16QAM	1	0	21.11	20.5±1	/
				1	49	20.95	20.5±1	/
				1	99	20.81	20.5±1	/
				36	0	19.91	19.5±1	1.0
				36	49	19.87	19.5±1	1.0
				75	0	20.13	19.5±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	37850	2580	QPSK	1	0	21.96	21.0±1	/
				1	49	22.33	21.0±1	/
				1	99	22.27	21.0±1	/
				50	0	21.37	20.0±1	1.0
				50	49	21.46	20.0±1	1.0
				100	0	21.39	20.0±1	1.0
			16QAM	1	0	21.73	21.0±1	/
				1	49	21.95	21.0±1	/
				1	99	21.83	21.0±1	/
				50	0	20.46	20.0±1	1.0
				50	49	20.54	20.0±1	1.0
				100	0	20.43	20.0±1	1.0
	38000	2595	QPSK	1	0	22.57	22.0±1	/
				1	49	22.58	22.0±1	/
				1	99	22.34	22.0±1	/
				50	0	21.53	21.0±1	1.0
				50	49	21.42	21.0±1	1.0
				100	0	21.46	21.0±1	1.0
			16QAM	1	0	21.53	21.0±1	/
				1	49	21.52	21.0±1	/
				1	99	21.08	21.0±1	/
				50	0	20.54	20.0±1	1.0
				50	49	20.51	20.0±1	1.0
				100	0	20.42	20.0±1	1.0
	38150	2610	QPSK	1	0	22.13	22.0±1	/
				1	49	22.03	22.0±1	/
				1	99	21.73	21.0±1	1.0
				50	0	21.31	21.0±1	1.0
				50	49	21.10	21.0±1	1.0
				100	0	21.17	21.0±1	1.0
			16QAM	1	0	21.75	21.0±1	/
				1	49	21.71	21.0±1	/
				1	99	21.34	21.0±1	/
				50	0	20.29	20.0±1	1.0
				50	49	20.08	20.0±1	1.0
				100	0	20.18	20.0±1	1.0

LTE Band 41:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	39675	2498.5	QPSK	1	0	21.75	21.0±1	/
				1	49	21.76	21.0±1	/
				1	99	21.90	21.0±1	/
				12	0	20.62	20.0±1	1.0
				12	24	20.81	20.0±1	1.0
				25	0	20.77	20.0±1	1.0
			16QAM	1	0	21.06	21.0±1	/
				1	49	21.21	21.0±1	/
				1	99	21.22	21.0±1	/
				12	0	21.04	21.0±1	/
				12	49	21.17	21.0±1	/
				25	0	20.85	20.0±1	1.0
	40620	2593	QPSK	1	0	22.84	22.0±1	/
				1	49	22.81	22.0±1	/
				1	99	22.83	22.0±1	/
				12	0	21.69	21.0±1	1.0
				12	24	21.72	21.0±1	1.0
				25	0	21.72	21.0±1	1.0
			16QAM	1	0	22.13	22.0±1	/
				1	49	22.20	22.0±1	/
				1	99	22.20	22.0±1	/
				12	0	20.73	21.0±1	1.0
				12	24	20.80	21.0±1	1.0
				25	0	20.84	21.0±1	1.0
	41565	2687.5	QPSK	1	0	22.63	22.0±1	/
				1	49	22.50	22.0±1	/
				1	99	22.57	22.0±1	/
				12	0	21.52	21.0±1	1.0
				12	24	21.54	21.0±1	1.0
				25	0	21.54	21.0±1	1.0
			16QAM	1	0	21.84	21.0±1	/
				1	49	21.79	21.0±1	/
				1	99	21.79	21.0±1	/
				12	0	20.54	20.0±1	1.0
				12	24	20.55	20.0±1	1.0
				25	0	20.55	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	39700	2501	QPSK	1	0	21.88	21.5±1	/
				1	49	22.01	21.5±1	/
				1	99	22.22	21.5±1	/
				25	0	20.82	20.5±1	1.0
				25	24	20.92	20.5±1	1.0
				50	0	20.83	20.5±1	1.0
			16QAM	1	0	21.23	21.0±1	/
				1	49	21.32	21.0±1	/
				1	99	21.53	21.0±1	/
				25	0	19.80	20.0±1	1.0
				25	24	20.15	20.0±1	1.0
	40620	2593	QPSK	1	0	22.87	22.0±1	/
				1	49	22.97	22.0±1	/
				1	99	23.00	22.0±1	/
				25	0	21.81	21.0±1	1.0
				25	24	21.53	21.0±1	1.0
				50	0	21.17	21.0±1	1.0
			16QAM	1	0	22.68	22.0±1	/
				1	49	22.47	22.0±1	/
				1	99	22.56	22.0±1	/
				25	0	21.74	21.0±1	1.0
				25	24	21.53	21.0±1	1.0
	41540	2685	QPSK	1	0	22.85	22.0±1	/
				1	49	22.68	22.0±1	/
				1	99	22.84	22.0±1	/
				25	0	21.61	21.0±1	1.0
				25	24	21.64	21.0±1	1.0
				50	0	21.28	21.0±1	1.0
			16QAM	1	0	22.41	22.0±1	/
				1	49	22.35	22.0±1	/
				1	99	22.17	22.0±1	/
				25	0	21.85	21.0±1	1.0
				25	24	21.94	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	39725	2503.5	QPSK	1	0	21.91	22.0±1	/
				1	49	22.10	22.0±1	/
				1	99	22.25	22.0±1	/
				36	0	20.91	21.0±1	1.0
				36	24	20.85	21.0±1	1.0
				75	0	20.47	21.0±1	1.0
			16QAM	1	0	22.14	22.0±1	/
				1	49	21.98	21.0±1	1.0
				1	99	22.04	22.0±1	/
				27	0	21.59	21.0±1	1.0
				27	37	21.42	21.0±1	1.0
	40620	2593	QPSK	1	0	22.81	22.0±1	/
				1	49	22.96	22.0±1	/
				1	99	22.97	22.0±1	/
				36	0	21.81	21.0±1	1.0
				36	24	21.91	21.0±1	1.0
				75	0	21.27	21.0±1	1.0
			16QAM	1	0	22.18	22.0±1	/
				1	49	22.10	22.0±1	/
				1	99	22.08	22.0±1	/
				27	0	20.89	21.0±1	1.0
				27	37	20.99	21.0±1	1.0
	41515	2682.5	QPSK	1	0	22.67	22.0±1	/
				1	49	22.45	22.0±1	/
				1	99	22.58	22.0±1	/
				36	0	21.99	21.0±1	1.0
				36	24	21.83	21.0±1	1.0
				75	0	21.41	21.0±1	1.0
			16QAM	1	0	21.84	21.0±1	/
				1	49	21.73	21.0±1	/
				1	99	21.51	21.0±1	/
				27	0	20.66	20.0±1	1.0
				27	37	20.76	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	39750	2506	QPSK	1	0	22.51	22.0±1	/
				1	49	22.47	22.0±1	/
				1	99	22.35	22.0±1	/
				50	0	21.95	21.0±1	1.0
				50	24	21.77	21.0±1	1.0
				100	0	21.16	21.0±1	1.0
			16QAM	1	0	21.42	21.0±1	/
				1	49	21.17	21.0±1	/
				1	99	21.45	21.0±1	/
				27	0	19.69	20.0±1	1.0
				27	37	20.23	20.0±1	1.0
	40620	2593	QPSK	1	0	22.65	22.0±1	/
				1	49	22.98	22.0±1	/
				1	99	22.76	22.0±1	/
				50	0	22.17	22.0±1	/
				50	24	22.23	22.0±1	/
				100	0	21.96	21.0±1	1.0
			16QAM	1	0	22.47	22.0±1	/
				1	49	22.12	22.0±1	/
				1	99	22.28	22.0±1	/
				27	0	21.89	21.0±1	1.0
				27	37	20.84	21.0±1	1.0
	41490	2680	QPSK	1	0	22.56	22.0±1	/
				1	49	22.65	22.0±1	/
				1	99	22.79	22.0±1	/
				50	0	21.57	21.0±1	1.0
				50	24	21.48	21.0±1	1.0
				100	0	21.17	21.0±1	1.0
			16QAM	1	0	22.46	22.0±1	/
				1	49	22.19	22.0±1	/
				1	99	22.35	22.0±1	/
				27	0	21.87	21.0±1	1.0
				27	37	21.68	21.0±1	1.0

LTE Band 66:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	131979	1710.7	QPSK	1	0	22.14	22.0±1	/
				1	2	22.01	22.0±1	/
				1	5	21.96	21.0±1	1.0
				3	0	21.77	21.0±1	1.0
				3	2	21.81	21.0±1	1.0
				6	0	21.74	21.0±1	1.0
			16QAM	1	0	21.71	21.0±1	/
				1	2	21.85	21.0±1	/
				1	5	21.67	21.0±1	/
				3	0	21.26	21.0±1	/
				3	2	21.13	21.0±1	/
				6	0	20.91	20.0±1	/
	132322	1745	QPSK	1	0	22.89	22.0±1	/
				1	2	22.82	22.0±1	/
				1	5	22.76	22.0±1	/
				3	0	22.70	22.0±1	/
				3	1	22.64	22.0±1	/
				6	0	22.65	22.0±1	/
			16QAM	1	0	22.53	22.0±1	/
				1	2	22.50	22.0±1	/
				1	5	22.51	22.0±1	/
				3	0	22.53	22.0±1	/
				3	2	22.43	22.0±1	/
				6	0	22.12	22.0±1	/
	132665	1779.3	QPSK	1	0	19.41	19.0±1	/
				1	2	19.49	19.0±1	/
				1	5	19.52	19.0±1	/
				3	0	19.30	19.0±1	/
				3	2	19.38	19.0±1	/
				6	0	19.31	19.0±1	/
			16QAM	1	0	19.37	19.0±1	/
				1	2	19.53	19.0±1	/
				1	5	19.59	19.0±1	/
				3	0	19.27	19.0±1	/
				3	2	19.39	19.0±1	/
				6	0	19.11	19.0±1	/

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	131987	1711.5	QPSK	1	0	21.65	21.0±1	/
				1	8	21.91	21.0±1	/
				1	14	21.94	21.0±1	/
				8	0	21.71	21.0±1	/
				8	9	21.87	21.0±1	/
				15	0	21.74	21.0±1	/
			16QAM	1	0	21.68	21.0±1	/
				1	8	21.93	21.0±1	/
				1	14	21.97	21.0±1	/
				8	0	21.63	21.0±1	/
				8	9	21.79	21.0±1	/
				15	0	21.58	21.0±1	/
	132322	1745	QPSK	1	0	22.43	22.0±1	/
				1	8	22.55	22.0±1	/
				1	14	22.46	22.0±1	/
				8	4	22.44	22.0±1	/
				8	9	22.47	22.0±1	/
				15	0	22.43	22.0±1	/
			16QAM	1	0	22.26	22.0±1	/
				1	8	22.36	22.0±1	/
				1	14	22.29	22.0±1	/
				8	0	22.38	22.0±1	/
				8	9	22.41	22.0±1	/
				15	0	22.38	22.0±1	/
	132657	1778.5	QPSK	1	0	18.63	18.0±1	/
				1	8	18.56	18.0±1	/
				1	14	18.79	18.0±1	/
				8	0	18.27	18.0±1	/
				8	9	18.13	18.0±1	/
				15	0	17.97	17.0±1	1.0
			16QAM	1	0	20.96	20.0±1	/
				1	8	20.75	20.0±1	/
				1	14	20.63	20.0±1	/
				8	0	18.98	19.0±1	1.0
				8	9	19.20	19.0±1	1.0
				15	0	18.94	19.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	131997	1712.5	QPSK	1	0	21.35	21.0±1	/
				1	12	21.87	21.0±1	/
				1	24	21.89	21.0±1	/
				12	0	21.54	21.0±1	/
				12	11	21.86	21.0±1	/
				25	0	21.70	21.0±1	/
			16QAM	1	0	22.52	22.0±1	/
				1	12	22.48	22.0±1	/
				1	24	22.51	22.0±1	/
				12	0	22.05	22.0±1	/
				12	11	22.16	22.0±1	/
				25	0	21.91	21.0±1	1.0
	132322	1745	QPSK	1	0	22.48	22.0±1	/
				1	12	22.66	22.0±1	/
				1	24	22.39	22.0±1	/
				12	0	22.50	22.0±1	/
				12	11	22.51	22.0±1	/
				25	0	22.47	22.0±1	/
			16QAM	1	0	22.48	22.0±1	/
				1	12	22.73	22.0±1	/
				1	24	22.52	22.0±1	/
				12	0	22.18	22.0±1	/
				12	11	22.07	22.0±1	/
				25	0	22.89	22.0±1	/
	132647	1777.5	QPSK	1	0	18.83	18.0±1	1.0
				1	12	19.11	19.0±1	/
				1	24	19.19	19.0±1	/
				12	0	18.82	18.0±1	1.0
				12	11	19.08	19.0±1	/
				25	0	18.56	18.0±1	1.0
			16QAM	1	0	22.86	22.0±1	/
				1	12	22.71	22.0±1	/
				1	24	22.69	22.0±1	/
				12	0	22.17	22.0±1	/
				12	11	22.27	22.0±1	/
				25	0	21.88	21.0±1	1.0


BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	132022	1715	QPSK	1	0	21.32	21.0±1	1.0
				1	24	22.41	22.0±1	/
				1	49	22.23	22.0±1	/
				25	0	21.83	21.0±1	1.0
				25	24	22.35	22.0±1	/
				50	0	22.07	22.0±1	/
			16QAM	1	0	22.57	22.0±1	/
				1	24	22.44	22.0±1	/
				1	49	22.51	22.0±1	/
				25	0	22.08	22.0±1	/
	132322	1745	QPSK	25	24	22.17	22.0±1	/
				1	0	22.21	22.0±1	/
				1	24	22.72	22.0±1	/
				1	49	22.12	22.0±1	/
				25	0	22.46	22.0±1	/
				25	24	22.48	22.0±1	/
			16QAM	50	0	22.42	22.0±1	/
				1	0	22.19	22.0±1	/
				1	24	22.11	22.0±1	/
				1	49	22.17	22.0±1	/
	132622	1775	QPSK	25	0	22.79	22.0±1	/
				25	24	22.72	22.0±1	/
			16QAM	1	0	18.97	18.0±1	/
				1	24	18.99	18.0±1	/
				1	49	18.76	18.0±1	/
				25	0	18.92	18.0±1	/
			16QAM	25	24	18.83	18.0±1	/
				50	0	18.80	18.0±1	/
				1	0	22.68	22.0±1	/
				1	24	22.47	22.0±1	/
			16QAM	1	49	22.51	22.0±1	/
				25	0	21.99	21.0±1	1.0
			16QAM	25	24	21.83	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	132047	1717.5	QPSK	1	0	21.64	21.0±1	1.0
				1	37	22.59	22.0±1	/
				1	74	22.70	22.0±1	/
				36	0	22.05	22.0±1	/
				36	35	22.67	22.0±1	/
				75	0	22.32	22.0±1	/
			16QAM	1	0	21.47	21.0±1	1.0
				1	37	22.56	22.0±1	/
				1	74	22.59	22.0±1	/
				27	0	21.77	21.0±1	1.0
	132322	1745	QPSK	27	37	21.56	21.0±1	1.0
				1	0	22.48	22.0±1	/
				1	37	22.60	22.0±1	/
				1	74	22.32	22.0±1	/
				36	0	22.40	22.0±1	/
				36	35	22.44	22.0±1	/
				75	0	22.34	22.0±1	/
			16QAM	1	0	22.34	22.0±1	/
				1	37	22.66	22.0±1	/
				1	74	22.36	22.0±1	/
				27	0	22.21	22.0±1	/
	132597	1772.5	QPSK	27	37	22.29	22.0±1	/
				1	0	19.88	19.0±1	/
				1	37	18.74	18.0±1	1.0
				1	74	18.80	18.0±1	1.0
				36	0	19.16	19.0±1	/
				36	35	19.25	19.0±1	/
				75	0	18.97	18.0±1	1.0
			16QAM	1	0	19.55	19.0±1	/
				1	37	19.60	19.0±1	/
				1	74	19.36	19.0±1	/
				27	0	19.69	19.0±1	/
				27	37	18.86	18.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	132072	1720	QPSK	1	0	21.04	21.0±1	1.0
				1	49	22.60	22.0±1	/
				1	99	22.48	22.0±1	/
				50	0	21.49	21.0±1	1.0
				50	24	21.77	21.0±1	1.0
				100	0	21.05	21.0±1	1.0
			16QAM	1	0	22.25	22.0±1	/
				1	49	22.17	22.0±1	/
				1	99	22.11	22.0±1	/
				27	0	21.82	21.0±1	1.0
	132322	1745	QPSK	27	49	22.97	22.0±1	/
				1	0	22.36	22.0±1	/
				1	49	22.76	22.0±1	/
				1	99	22.20	22.0±1	/
				50	0	22.50	22.0±1	/
				50	24	22.18	22.0±1	/
				100	0	21.09	21.0±1	1.0
			16QAM	1	0	22.47	22.0±1	/
				1	49	22.18	22.0±1	/
				1	99	22.29	22.0±1	/
				27	0	21.71	21.0±1	1.0
	132572	1770	QPSK	27	49	21.95	21.0±1	1.0
				1	0	21.61	20.0±2	/
				1	49	19.68	18.0±2	2.0
				1	99	18.80	18.0±2	2.0
				50	0	20.49	20.0±2	/
				50	24	18.92	18.0±2	2.0
				100	0	19.68	18.0±2	2.0
			16QAM	1	0	20.71	20.0±1	/
				1	49	19.04	19.0±1	1.0
				1	99	20.56	20.0±1	/
				27	0	19.53	19.0±1	1.0
				27	49	19.75	19.0±1	1.0

12 Exposure Conditions Consideration

EUT antenna location:

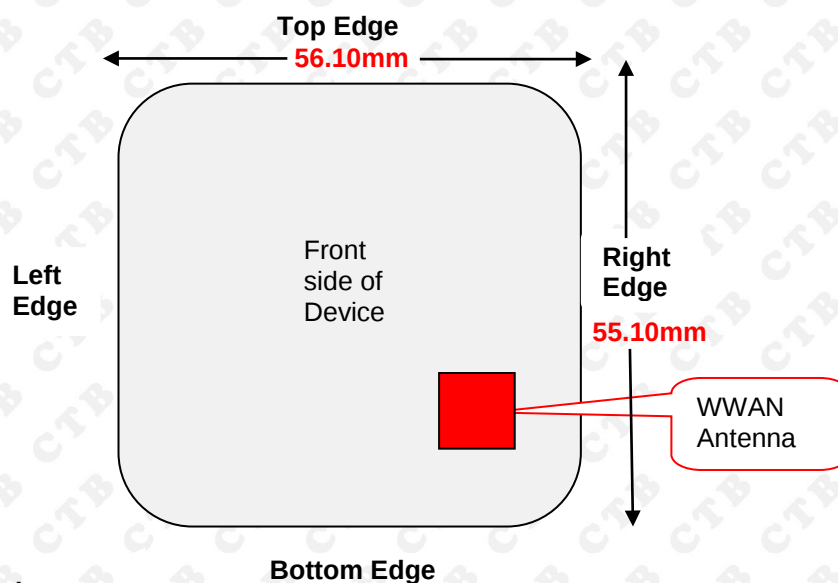

Test position consideration:

Distance of EUT antenna-to-edge/surface(mm), Test distance:0mm						
Antennas	Front side	Back side	Left Edge	Right Edge	Top Edge	Bottom Edge
LTE Band 2	19	15	40	9	32	16
LTE Band 4	19	15	40	9	32	16
LTE Band 5	19	15	40	9	32	16
LTE Band 7	19	15	40	9	32	16
LTE Band 38	19	15	40	9	32	16
LTE Band 41	19	15	40	9	32	16
LTE Band 66	19	15	40	9	32	16

Test distance:0mm						
Antennas	Front side	Back side	Left Edge	Right Edge	Top Edge	Bottom Edge
LTE Band 2	YES	YES	YES	YES	YES	YES
LTE Band 4	YES	YES	YES	YES	YES	YES
LTE Band 5	YES	YES	YES	YES	YES	YES
LTE Band 7	YES	YES	YES	YES	YES	YES
LTE Band 38	YES	YES	YES	YES	YES	YES
LTE Band 41	YES	YES	YES	YES	YES	YES
LTE Band 66	YES	YES	YES	YES	YES	YES

Appendix A

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table. The equation and threshold in section 4.3.1 must be applied to determine SAR test exclusion.

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	
MHz	30	35	40	45	50	mm
150	232	271	310	349	387	SAR Test Exclusion Threshold (mW)
300	164	192	219	246	274	
450	134	157	179	201	224	
835	98	115	131	148	164	
900	95	111	126	142	158	
1500	73	86	98	110	122	
1900	65	76	87	98	109	
2450	57	67	77	86	96	
3600	47	55	63	71	79	
5200	39	46	53	59	66	
5400	39	45	52	58	65	
5800	37	44	50	56	62	

Appendix B

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and > 50 mm

Approximate SAR test exclusion power thresholds at selected frequencies and test separation distances are illustrated in the following table. The equation and threshold in 4.3.1 must be applied to determine SAR test exclusion.

MHz	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	mm
100	474	481	487	494	501	507	514	521	527	534	541	547	554	561	567	mW
150	387	397	407	417	427	437	447	457	467	477	487	497	507	517	527	
300	274	294	314	334	354	374	394	414	434	454	474	494	514	534	554	
450	224	254	284	314	344	374	404	434	464	494	524	554	584	614	644	
835	164	220	275	331	387	442	498	554	609	665	721	776	832	888	943	
900	158	218	278	338	398	458	518	578	638	698	758	818	878	938	998	
1500	122	222	322	422	522	622	722	822	922	1022	1122	1222	1322	1422	1522	
1900	109	209	309	409	509	609	709	809	909	1009	1109	1209	1309	1409	1509	
2450	96	196	296	396	496	596	696	796	896	996	1096	1196	1296	1396	1496	
3600	79	179	279	379	479	579	679	779	879	979	1079	1179	1279	1379	1479	
5200	66	166	266	366	466	566	666	766	866	966	1066	1166	1266	1366	1466	
5400	65	165	265	365	465	565	665	765	865	965	1065	1165	1265	1365	1465	
5800	62	162	262	362	462	562	662	762	862	962	1062	1162	1262	1362	1462	

Note:

1. Body SAR assessments is required.
2. Per KDB 447498 D01v06, for EUT the test separation distance is determined by the smallest distance between the outer surface of the device and the user, which is 0 mm for body SAR.

13 SAR Test Results

13.1 Test Condition:

1. SAR Measurement
The distance between the EUT and the antenna of the emulator is more than 50 cm and the output power radiated from the emulator antenna is at least 30 dB less than the output power of EUT.
2. Environmental Conditions

Temperature	23°C
Relative Humidity	57%
Atmospheric Pressure	1019mbar
3. Tested By : Andy Feng

13.2 Generally Test Procedures:

1. Establish communication link between EUT and base station emulation by air link.
2. Place the EUT in the selected test position. (Cheek, tilt or flat)
3. Perform SAR testing at middle or highest output power channel under the selected test mode. If the measured 1-g SAR is ≤ 0.8 W/kg, then testing for the other channel will not be performed.
4. When SAR is < 0.8 W/kg, no repeated SAR measurement is required

For LTE test:

1. According to FCC KDB 941225 D05v02r05:
 - a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
 - b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
 - c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
 - d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.
 - e. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

13.3 SAR Summary Test Result:

Table 1: SAR Values of LTE BAND 2 , 20MHz ,QPSK

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #0	Body-worn (0mm Separation)	Front Side	19100	1900	22.5	22.10	0	0.0102	0.01	--
		Back Side	19100	1900	22.5	22.10	0	0.348	0.38	--
		Right Edge	19100	1900	22.5	22.10	0	0.690	0.76	1
		Left Edge	19100	1900	22.5	22.10	0	0.0571	0.06	--
		Top Edge	19100	1900	22.5	22.10	0	0.0995	0.11	--
		Bottom Edge	19100	1900	22.5	22.10	0	0.157	0.17	--
50%RB #0	Body-worn (0mm Separation)	Front Side	19100	1900	21.5	20.67	1	0.00627	0.008	--
		Back Side	19100	1900	21.5	20.67	1	0.214	0.26	--
		Right Edge	19100	1900	21.5	20.67	1	0.424	0.51	--
		Left Edge	19100	1900	21.5	20.67	1	0.0351	0.04	--
		Top Edge	19100	1900	21.5	20.67	1	0.0612	0.07	--
		Bottom Edge	19100	1900	21.5	20.67	1	0.0966	0.12	--

Table 2: SAR Values of LTE BAND 4 , 10MHz ,QPSK

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #99	Body-worn (0mm Separation)	Front Side	20350	1750	23	22.44	0	0.00975	0.01	--
		Back Side	20350	1750	23	22.44	0	0.302	0.34	--
		Right Edge	20350	1750	23	22.44	0	0.645	0.73	--
		Left Edge	20350	1750	23	22.44	0	0.0519	0.06	--
		Top Edge	20350	1750	23	22.44	0	0.0824	0.09	--
		Bottom Edge	20350	1750	23	22.44	0	0.138	0.16	--
50%RB #49	Body-worn (0mm Separation)	Front Side	20350	1750	22	21.36	1	0.00825	0.01	--
		Back Side	20350	1750	22	21.36	1	0.255	0.30	--
		Right Edge	20350	1750	22	21.36	1	0.545	0.63	--
		Left Edge	20350	1750	22	21.36	1	0.0439	0.05	--
		Top Edge	20350	1750	22	21.36	1	0.0697	0.08	--
		Bottom Edge	20350	1750	22	21.36	1	0.116	0.13	--

Table 3: SAR Values of LTE BAND 4 , 20MHz ,QPSK

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Body-worn (0mm Separation)	Front Side	20300	1745	23	22.43	0	0.0319	0.04	--
		Back Side	20300	1745	23	22.43	0	0.504	0.57	--
		Right Edge	20300	1745	23	22.43	0	0.675	0.77	2
		Left Edge	20300	1745	23	22.43	0	0.0833	0.09	--
		Top Edge	20300	1745	23	22.43	0	0.128	0.15	--
		Bottom Edge	20300	1745	23	22.43	0	0.274	0.31	--
50%RB #24	Body-worn (0mm Separation)	Front Side	20300	1745	22	21.32	1	0.027	0.03	--
		Back Side	20300	1745	22	21.32	1	0.426	0.50	--
		Right Edge	20300	1745	22	21.32	1	0.571	0.67	--
		Left Edge	20300	1745	22	21.32	1	0.0705	0.08	--
		Top Edge	20300	1745	22	21.32	1	0.108	0.13	--
		Bottom Edge	20300	1745	22	21.32	1	0.231	0.27	--

Table 4: SAR Values of LTE BAND 5 , 1.4MHz ,QPSK

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #2	Body-worn (0mm Separation)	Front Side	20407	824.7	23	22.36	0	0.00114	0.001	--
		Back Side	20407	824.7	23	22.36	0	0.0962	0.11	--
		Right Edge	20407	824.7	23	22.36	0	0.131	0.15	--
		Left Edge	20407	824.7	23	22.36	0	0.00733	0.008	--
		Top Edge	20407	824.7	23	22.36	0	0.0279	0.03	--
		Bottom Edge	20407	824.7	23	22.36	0	0.0552	0.06	--
50%RB #0	Body-worn (0mm Separation)	Front Side	20407	824.7	22	21.95	1	0.00096	0.001	--
		Back Side	20407	824.7	22	21.95	1	0.0814	0.08	--
		Right Edge	20407	824.7	22	21.95	1	0.110	0.11	--
		Left Edge	20407	824.7	22	21.95	1	0.0062	0.006	--
		Top Edge	20407	824.7	22	21.95	1	0.0236	0.02	--
		Bottom Edge	20407	824.7	22	21.95	1	0.0467	0.05	--

Table 5: SAR Values of LTE BAND 5 , 10MHz ,QPSK

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Body-worn (0mm Separation)	Front Side	20525	836.5	23	22.20	0	0.000997	0.001	--
		Back Side	20525	836.5	23	22.20	0	0.0814	0.10	--
		Right Edge	20525	836.5	23	22.20	0	0.160	0.19	3
		Left Edge	20525	836.5	23	22.20	0	0.00531	0.006	--
		Top Edge	20525	836.5	23	22.20	0	0.0207	0.02	--
		Bottom Edge	20525	836.5	23	22.20	0	0.0432	0.05	--
50%RB #49	Body-worn (0mm Separation)	Front Side	20525	836.5	22	21.04	1	0.000843	0.001	--
		Back Side	20525	836.5	22	21.04	1	0.0689	0.09	--
		Right Edge	20525	836.5	22	21.04	1	0.135	0.17	--
		Left Edge	20525	836.5	22	21.04	1	0.00449	0.006	--
		Top Edge	20525	836.5	22	21.04	1	0.0175	0.02	--
		Bottom Edge	20525	836.5	22	21.04	1	0.0365	0.05	--

Table 6: SAR Values of LTE BAND 7 , 20MHz ,QPSK

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Body-worn (0mm Separation)	Front Side	21100	2535	23	22.97	0	0.0121	0.01	--
		Back Side	21100	2535	23	22.97	0	0.177	0.18	--
		Right Edge	21100	2535	23	22.97	0	0.234	0.24	4
		Left Edge	21100	2535	23	22.97	0	0.0418	0.04	--
		Top Edge	21100	2535	23	22.97	0	0.0615	0.06	--
		Bottom Edge	21100	2535	23	22.97	0	0.106	0.11	--
50%RB #0	Body-worn (0mm Separation)	Front Side	21100	2535	22	21.67	1	0.0102	0.01	--
		Back Side	21100	2535	22	21.67	1	0.149	0.16	--
		Right Edge	21100	2535	22	21.67	1	0.198	0.21	--
		Left Edge	21100	2535	22	21.67	1	0.0353	0.04	--
		Top Edge	21100	2535	22	21.67	1	0.0521	0.06	--
		Bottom Edge	21100	2535	22	21.67	1	0.0897	0.10	--

Table 7: SAR Values of LTE BAND 38 , 20MHz ,QPSK

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Body-worn (0mm Separation)	Front Side	38000	2595	23	22.58	0	0.00462	0.005	--
		Back Side	38000	2595	23	22.58	0	0.0815	0.09	--
		Right Edge	38000	2595	23	22.58	0	0.105	0.12	5
		Left Edge	38000	2595	23	22.58	0	0.00845	0.009	--
		Top Edge	38000	2595	23	22.58	0	0.0148	0.02	--
		Bottom Edge	38000	2595	23	22.58	0	0.0594	0.07	--
50%RB #0	Body-worn (0mm Separation)	Front Side	38000	2595	22	21.53	1	0.00391	0.004	--
		Back Side	38000	2595	22	21.53	1	0.0689	0.08	--
		Right Edge	38000	2595	22	21.53	1	0.0888	0.10	--
		Left Edge	38000	2595	22	21.53	1	0.00715	0.008	--
		Top Edge	38000	2595	22	21.53	1	0.0125	0.01	--
		Bottom Edge	38000	2595	22	21.53	1	0.0502	0.06	--

Table 8: SAR Values of LTE BAND 41 , 10MHz ,QPSK

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #99	Body-worn (0mm Separation)	Front Side	40620	2593	23	23.00	0	0.00499	0.005	--
		Back Side	40620	2593	23	23.00	0	0.0877	0.09	--
		Right Edge	40620	2593	23	23.00	0	0.112	0.11	6
		Left Edge	40620	2593	23	23.00	0	0.00925	0.009	--
		Top Edge	40620	2593	23	23.00	0	0.0281	0.03	--
		Bottom Edge	40620	2593	23	23.00	0	0.0652	0.07	--
50%RB #0	Body-worn (0mm Separation)	Front Side	40620	2593	22	21.81	1	0.00307	0.003	--
		Back Side	40620	2593	22	21.81	1	0.0539	0.06	--
		Right Edge	40620	2593	22	21.81	1	0.0689	0.07	--
		Left Edge	40620	2593	22	21.81	1	0.00569	0.006	--
		Top Edge	40620	2593	22	21.81	1	0.0172	0.02	--
		Bottom Edge	40620	2593	22	21.81	1	0.0401	0.04	--

Table 9: SAR Values of LTE BAND 41 , 20MHz ,QPSK

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Body-worn (0mm Separation)	Front Side	40620	2593	23	22.98	0	0.00349	0.004	--
		Back Side	40620	2593	23	22.98	0	0.0835	0.08	--
		Right Edge	40620	2593	23	22.98	0	0.101	0.10	--
		Left Edge	40620	2593	23	22.98	0	0.00785	0.008	--
		Top Edge	40620	2593	23	22.98	0	0.0248	0.02	--
		Bottom Edge	40620	2593	23	22.98	0	0.0627	0.06	--
50%RB #24	Body-worn (0mm Separation)	Front Side	40620	2593	23	22.23	0	0.00295	0.004	--
		Back Side	40620	2593	23	22.23	0	0.0706	0.08	--
		Right Edge	40620	2593	23	22.23	0	0.0854	0.10	--
		Left Edge	40620	2593	23	22.23	0	0.00664	0.008	--
		Top Edge	40620	2593	23	22.23	0	0.0209	0.02	--
		Bottom Edge	40620	2593	23	22.23	0	0.0531	0.06	--

Table 10: SAR Values of LTE BAND 66 , 1.4MHz ,QPSK

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #0	Body-worn (0mm Separation)	Front Side	132322	1745	23	22.89	0	0.00752	0.008	--
		Back Side	132322	1745	23	22.89	0	0.194	0.20	--
		Right Edge	132322	1745	23	22.89	0	0.312	0.32	--
		Left Edge	132322	1745	23	22.89	0	0.0372	0.04	--
		Top Edge	132322	1745	23	22.89	0	0.0818	0.08	--
		Bottom Edge	132322	1745	23	22.89	0	0.138	0.14	--
50%RB #0	Body-worn (0mm Separation)	Front Side	132322	1745	23	22.70	0	0.00636	0.007	--
		Back Side	132322	1745	23	22.70	0	0.164	0.18	--
		Right Edge	132322	1745	23	22.70	0	0.264	0.28	--
		Left Edge	132322	1745	23	22.70	0	0.0314	0.03	--
		Top Edge	132322	1745	23	22.70	0	0.0692	0.07	--
		Bottom Edge	132322	1745	23	22.70	0	0.116	0.12	--

Table 11: SAR Values of LTE BAND 66 , 20MHz ,QPSK

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Body-worn (0mm Separation)	Front Side	132322	1745	23	22.76	0	0.00826	0.009	--
		Back Side	132322	1745	23	22.76	0	0.228	0.24	--
		Right Edge	132322	1745	23	22.76	0	0.376	0.40	7
		Left Edge	132322	1745	23	22.76	0	0.0405	0.04	--
		Top Edge	132322	1745	23	22.76	0	0.0843	0.09	--
		Bottom Edge	132322	1745	23	22.76	0	0.159	0.17	--
50%RB #0	Body-worn (0mm Separation)	Front Side	132322	1745	23	22.50	0	0.00699	0.008	--
		Back Side	132322	1745	23	22.50	0	0.192	0.22	--
		Right Edge	132322	1745	23	22.50	0	0.318	0.36	--
		Left Edge	132322	1745	23	22.50	0	0.0342	0.04	--
		Top Edge	132322	1745	23	22.50	0	0.0713	0.08	--
		Bottom Edge	132322	1745	23	22.50	0	0.134	0.15	--

Note: Scaled SAR=SAR Value*10(0.1*Tune up Power-Conducted Power)

13.4 Measurement variability consideration

According to KDB 865664 D01v01r04 section 2.8.1, repeated measurements are required following the procedures as below:

Repeated measurement is not required when the original highest measured SAR is $< 0.80 \text{ W/kg}$; steps 2) through 4) do not apply.

When the original highest measured SAR is $\geq 0.80 \text{ W/kg}$, repeat that measurement once.

Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45 \text{ W/kg}$ ($\sim 10\%$ from the 1-g SAR limit).

Perform a third repeated measurement only if the original, first or second repeated measurement is $\geq 1.5 \text{ W/kg}$ and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

No Repeated SAR

13.5 Simultaneous Transmission SAR Analysis.

Note: No Simultaneous Transmission SAR Analysis.

13.6 SAR Measurement Reference

References

1. FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
2. IEEE Std. C95.1-2019, “IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz”, 2019
3. IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, June 2013
4. IEC 62209-2, “Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices—Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)”, April 2010
5. FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 23th, 2015
6. FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 16th, 2015
7. FCC KDB 865664 D01 v01r04, “SAR Measurement Requirements 100 MHz to 6 GHz”, Aug 7th, 2015
8. FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations”, Oct 23th, 2015

14 Maximum SAR measurement Plots

Plot 1

Date/Time: 2026/8/8 17:03:49


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.055$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7965; ConvF(8.07, 8.07, 8.07) @ 1900 MHz; Calibrated: 2025/11/24
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
Electronics: DAE4 Sn881; Calibrated: 2025/10/15
Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA26073008901 FCC ID Camera/Right edge/Area Scan (6x8x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.700 W/kg

KA26073008901 FCC ID Camera/Right edge/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 21.08 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 1.24 W/kg
SAR(1 g) = 0.690 W/kg; SAR(10 g) = 0.383 W/kg
Smallest distance from peaks to all points 3 dB below = 15.8 mm
Ratio of SAR at M2 to SAR at M1 = 56.3%
Maximum value of SAR (measured) = 0.755 W/kg

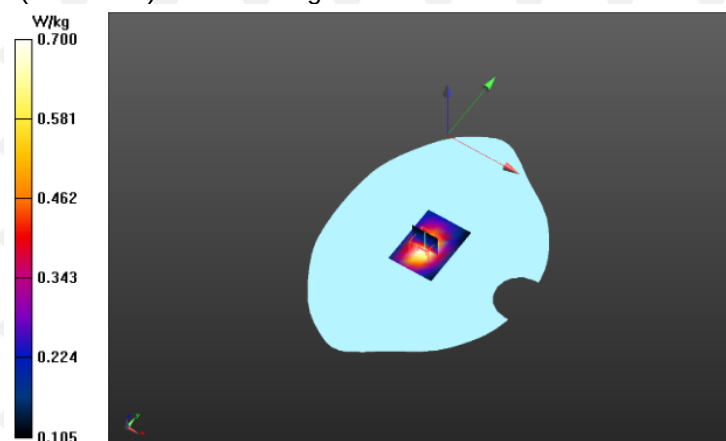

Plot 2

Date/Time: 2026/8/11 4:04:51


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 4, E-UTRA/FDD (1710.0 - 1755.0 MHz); Frequency: 1745 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.324$ S/m; $\epsilon_r = 41.958$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7965; ConvF(8.43, 8.43, 8.43) @ 1745 MHz; Calibrated: 2025/11/24
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
Electronics: DAE4 Sn881; Calibrated: 2025/10/15
Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA26073008901 FCC ID Camera/Right edge/Area Scan (6x8x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.674 W/kg

KA26073008901 FCC ID Camera/Right edge/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 22.29 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 1.47 W/kg
SAR(1 g) = 0.675 W/kg; SAR(10 g) = 0.324 W/kg
Smallest distance from peaks to all points 3 dB below = 11.1 mm
Ratio of SAR at M2 to SAR at M1 = 47.4%
Maximum value of SAR (measured) = 0.759 W/kg

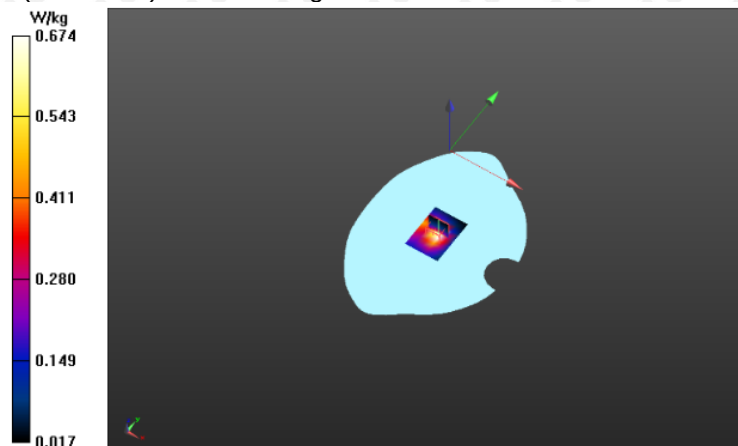

Plot 3

Date/Time: 2026/8/7 20:36:26


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 41.025$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7965; ConvF(9.58, 9.58, 9.58) @ 836.5 MHz; Calibrated: 2025/11/24
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
Electronics: DAE4 Sn881; Calibrated: 2025/10/15
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA26073008901 FCC ID Camera/Right edge/Area Scan (6x8x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.163 W/kg

KA26073008901 FCC ID Camera/Right edge/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 13.74 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 0.226 W/kg
SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.111 W/kg
Smallest distance from peaks to all points 3 dB below = 21.2 mm
Ratio of SAR at M2 to SAR at M1 = 70.7%
Maximum value of SAR (measured) = 0.172 W/kg

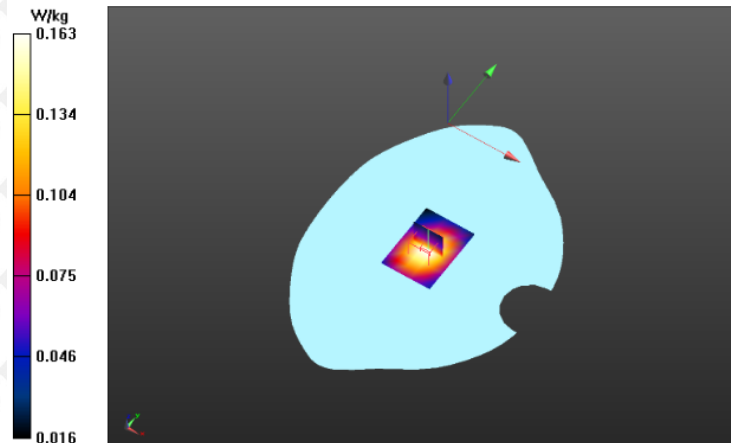

Plot 4

Date/Time: 2026/8/9 16:09:38


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2535 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.897$ S/m; $\epsilon_r = 40.376$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7965; ConvF(7.42, 7.42, 7.42) @ 2535 MHz; Calibrated: 2025/11/24
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
Electronics: DAE4 Sn881; Calibrated: 2025/10/15
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA26073008901 FCC ID Camera/Right edge/Area Scan (6x8x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.240 W/kg

KA26073008901 FCC ID Camera/Right edge/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 11.39 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 0.480 W/kg
SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.125 W/kg
Smallest distance from peaks to all points 3 dB below = 17.4 mm
Ratio of SAR at M2 to SAR at M1 = 46.9%
Maximum value of SAR (measured) = 0.253 W/kg

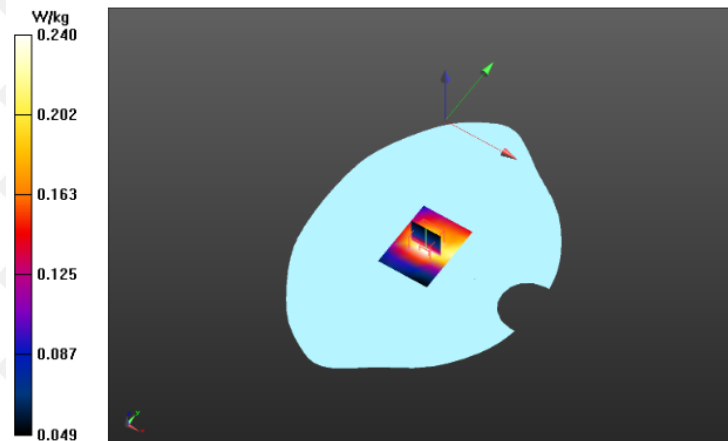

Plot 5

Date/Time: 2026/8/9 21:06:06

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 38, E-UTRA/TDD (2570.0 - 2620.0 MHz); Frequency: 2595 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 2595$ MHz; $\sigma = 1.949$ S/m; $\epsilon_r = 39.685$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7965; ConvF(7.42, 7.42, 7.42) @ 2595 MHz; Calibrated: 2025/11/24
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
Electronics: DAE4 Sn881; Calibrated: 2025/10/15
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA26073008901 FCC ID Camera/Right edge/Area Scan (6x8x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.109 W/kg

KA26073008901 FCC ID Camera/Right edge/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 7.248 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.234 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.057 W/kg

Ratio of SAR at M2 to SAR at M1 = 43.6%

Maximum value of SAR (measured) = 0.112 W/kg

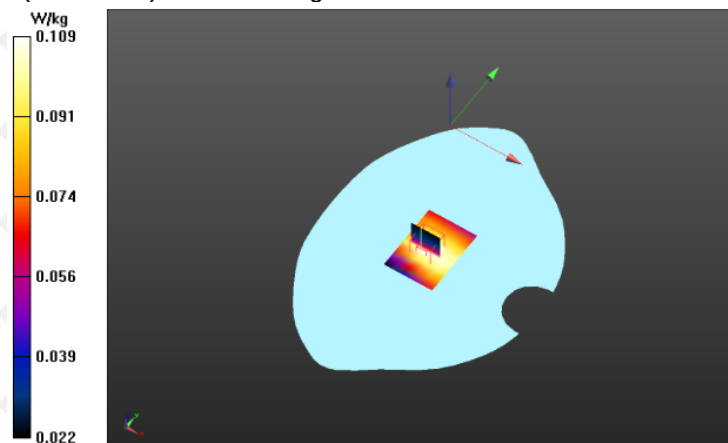

Plot 6

Date/Time: 2026/8/10 5:47:49


Communication System: UID 0, Generic LTE (0); Communication System Band: Band 41(10M), E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2593 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.937$ S/m; $\epsilon_r = 39.536$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7965; ConvF(7.42, 7.42, 7.42) @ 2593 MHz; Calibrated: 2025/11/24
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
Electronics: DAE4 Sn881; Calibrated: 2025/10/15
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA26073008901 FCC ID Camera/Right edge/Area Scan (6x8x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.116 W/kg

KA26073008901 FCC ID Camera/Right edge/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 7.522 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 0.246 W/kg
SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.062 W/kg
Ratio of SAR at M2 to SAR at M1 = 47.9%
Maximum value of SAR (measured) = 0.118 W/kg

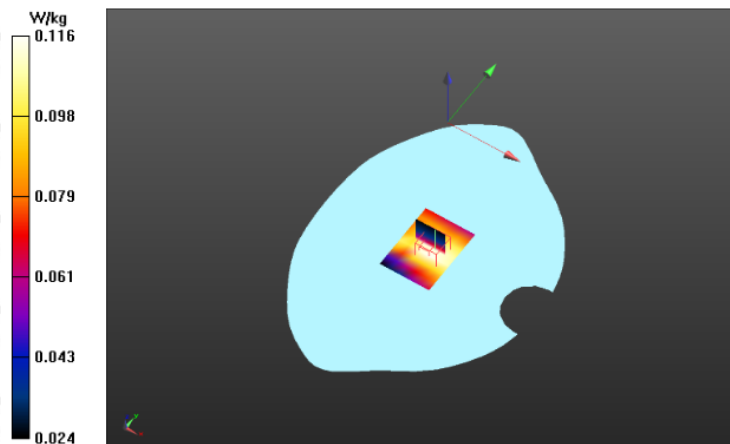

Plot 7

Date/Time: 2026/8/12 3:51:52

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 66, E-UTRA/FDD (1710-1780MHz); Frequency: 1745 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.329$ S/m; $\epsilon_r = 41.963$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7965; ConvF(8.43, 8.43, 8.43) @ 1745 MHz; Calibrated: 2025/11/24
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
Electronics: DAE4 Sn881; Calibrated: 2025/10/15
Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA26073008901 FCC ID Camera/Right edge/Area Scan (6x8x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.388 W/kg

KA26073008901 FCC ID Camera/Right edge/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.81 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.643 W/kg

SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.217 W/kg

Smallest distance from peaks to all points 3 dB below = 20.5 mm

Ratio of SAR at M2 to SAR at M1 = 57%


Maximum value of SAR (measured) = 0.409 W/kg

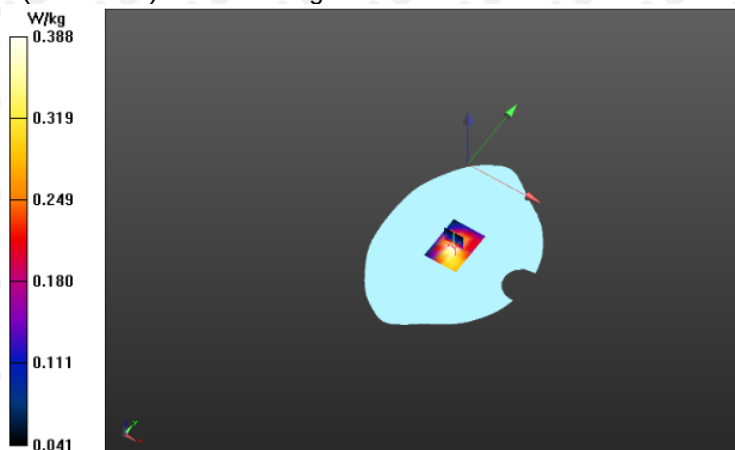


15 Calibration Reports-Probe and Dipole

The Probe, Dipole and DAE calibration please refer to the Attachment.

16 SAR System Photos

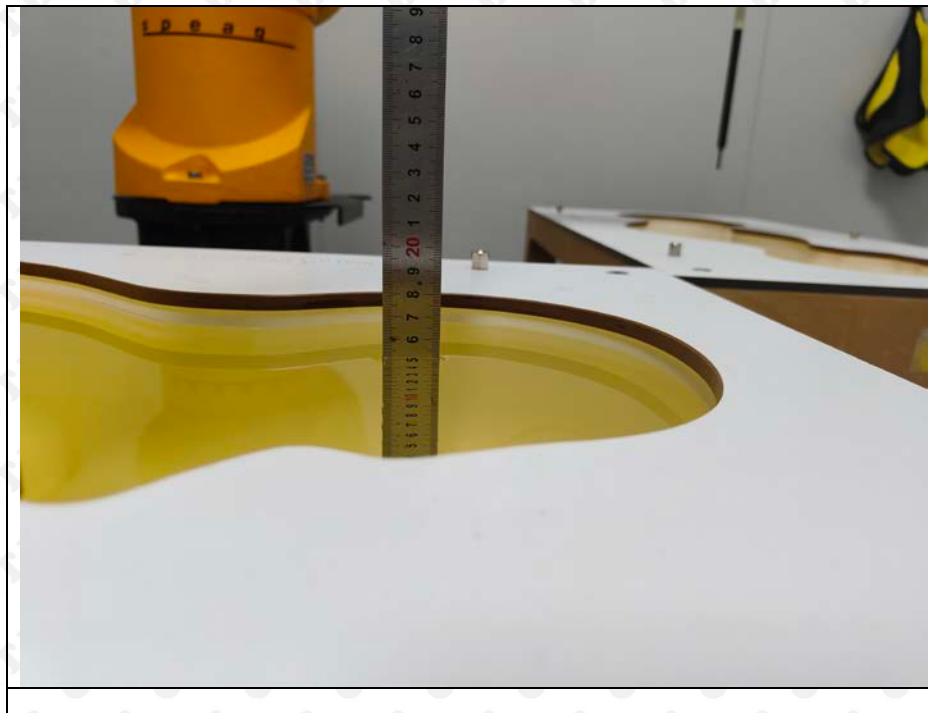


17 Setup Photo

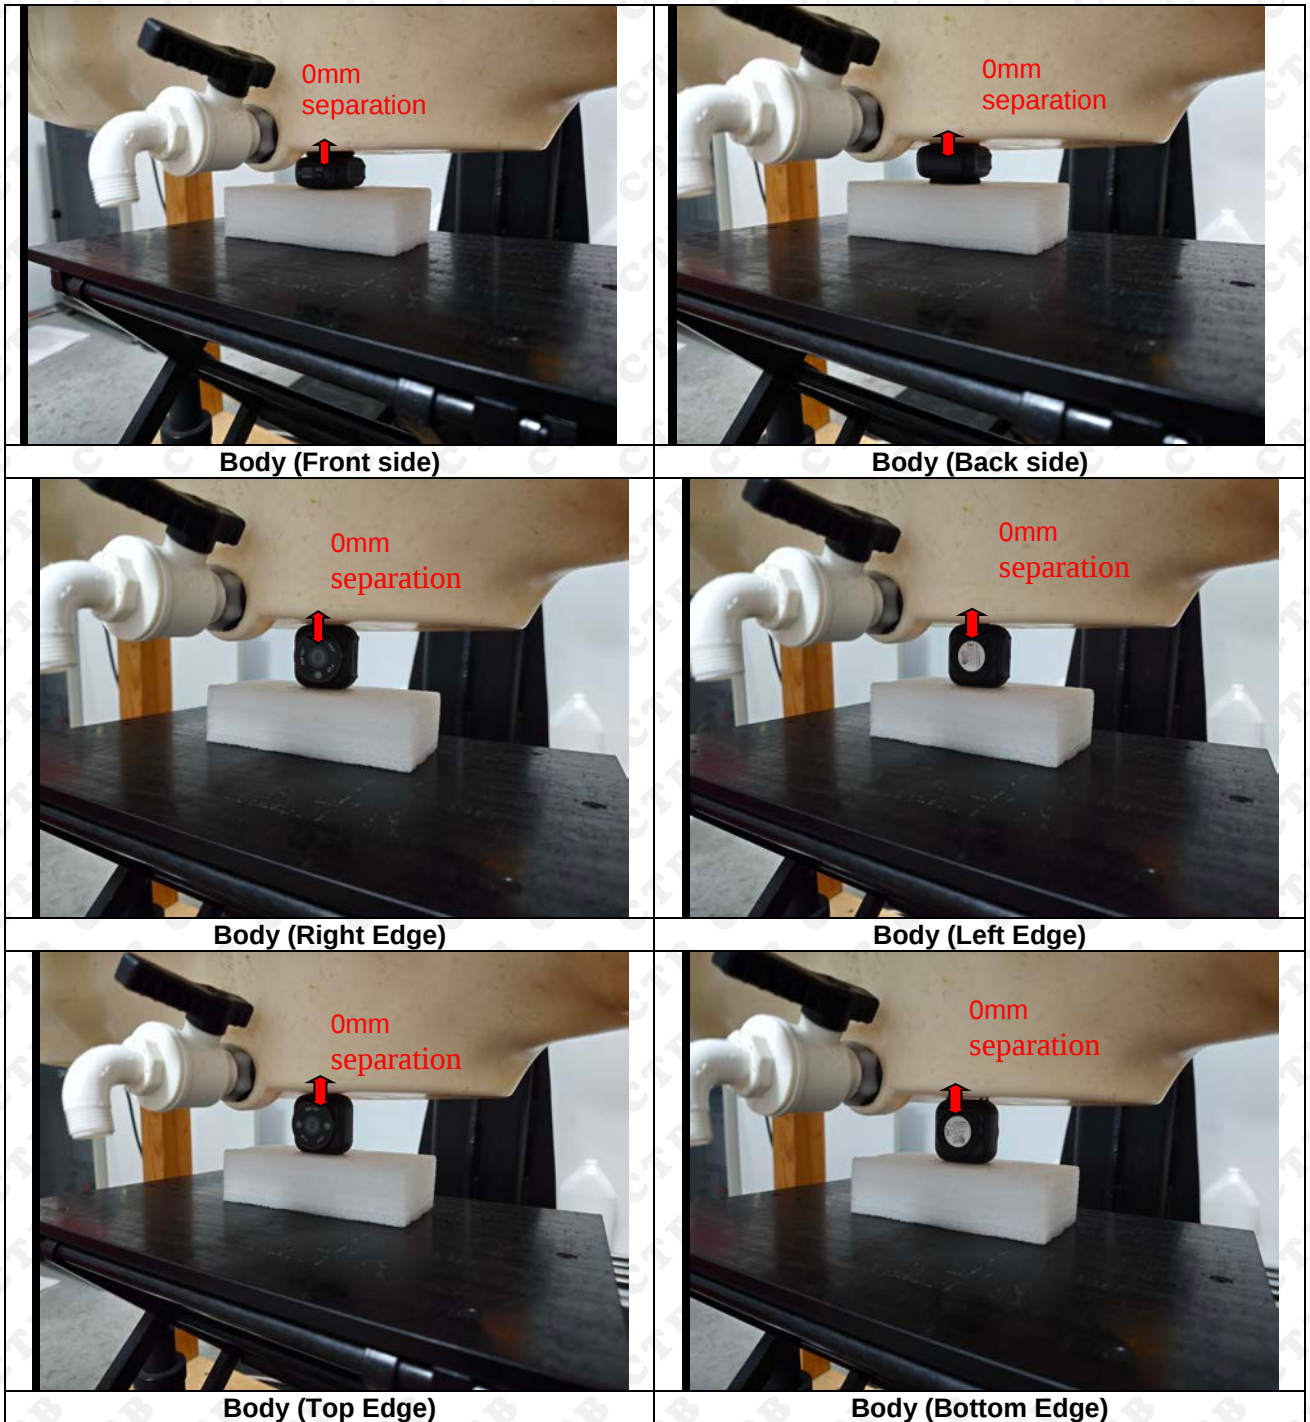

18 EUT Photos Front Side



Back Side

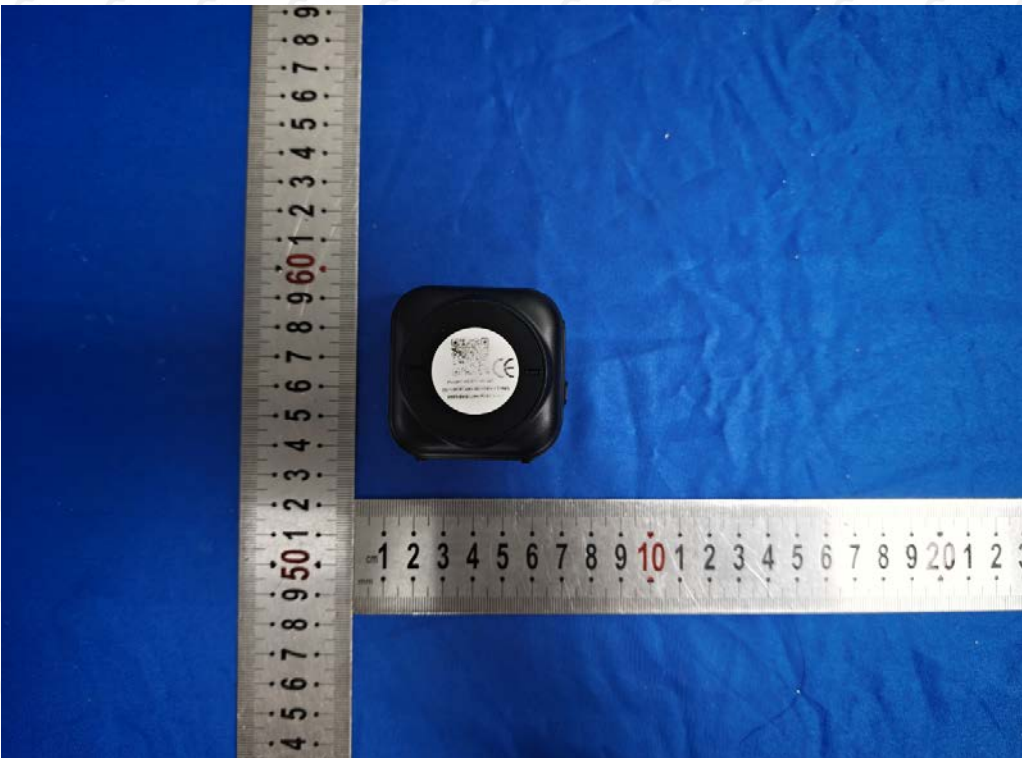

=====End of report=====