



FCC 47 CFR MPE REPORT

CE LINK LIMITED

WIRELESS CHARGER

Model Number: MPP25-1LJNA

Additional Model: BBWCQ22B-967626, CAC-3027, CAC-3026, CAC-3028

FCC ID: A4X-MPP25-1LJNA

Applicant:	CE LINK LIMITED
Address:	22 Dongkang Road, Dalingshan Town, Dongguan City,
	Guangdong Province, China
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: 86-769-83081888-808	

Report Number:	ESTE-R2511058
Date of Test:	Sep. 05, 2025 ~ Nov. 07, 2025
Date of Report:	Nov. 12, 2025


Applicant/ Manufacturer: Address:	CE LINK LIMITED 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong Province, China		
Factory 1: Address:	SuiChuan CE LINK LIMITED SuiChuan county industrial park east zone, Ji'an city, Jiangxi province, China.		
Factory 2: Address:	CE LINK VIET NAM COMPANY LIMITED. Part of lots CNSG-04, CNSG-06 Van Trung Industrial, Zone, Van TrungWard. Viet Yen Town, Bac Giang Province, Vietnam.		
E.U.T:	WIRELESS CHARGER		
Model Number:	MPP25-1LJNA		
Additional Model:	BBWCQ22B-967626, CAC-3027, CAC-3026, CAC-3028 Note: They are identical except model name.		
Power Supply:	Input: (USB-C): 5V---3A, 9V---3A, 12V---3A, 15V---2.4A Output: 25W Max		
Trade Name:	CE-LINK	Sample No.:	EST-250905007-002
Date of Receipt:	Sep. 05, 2025	Date of Test:	Sep. 05, 2025 ~ Nov. 07, 2025
Test Specification:	FCC CFR 47 Part 1.1307(b)&1.1310 KDB 680106 D01 RF Exposure Wireless Charging Apps v04r01		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC CFR 47 Part 1.1307(b)&1.1310 requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd. Date: Nov. 20, 2025		

Prepared by:

Zephyr Zhu

Zephyr Zhu / Assistant

Reviewed by:



Seven Wang / Engineer

Approved by:



Iceman Hu / Manager

Other Aspects: None.

Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested

This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd. The statement of compliance in this report is based on the limit in the test standard, the measurement uncertainty is not considered.

1. Summary of test

1.1. Summary of test result

No.	Description of Test Item	FCC Standard Section	Results
1	Maximum Permissible Exposure	Part 1.1307(b)&1.1310	PASS

1.2. Test Mode

Test Item	Test Mode
Maximum Permissible Exposure	Wireless Charging with 5W
	Wireless Charging with 7.5W
	Wireless Charging with 10W
	Wireless Charging with 15W
	Wireless Charging with 25W

1.3. Test Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Electric and Magnetic Field Probe-Analyzer	Narda S.T.S./PMM	EHP-200A	EST-E106	June 10,25	June 9,26
Test Software	Narda	EHP200-TS	Rel 1.92	N/A	N/A

Note: Test uncertainty: ± 1.62 dB (H-field); ± 1.64 dB (E-field) at a level of confidence of 95%.

1.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
1	Adapter	-	A1882	-	-
2	Wireless load	-	YBZ V.3.1	-	-

Item	Shielded Type	Ferrite Core	Length	Model Name/Type No.	Note
1	NO	NO	1.0m	-	DC Cable

2. Maximum Permissible Exposure


2.1. Limit

Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

Note: f = frequency in MHz * = Plane-wave equivalent power density.

2.2. Test Setup

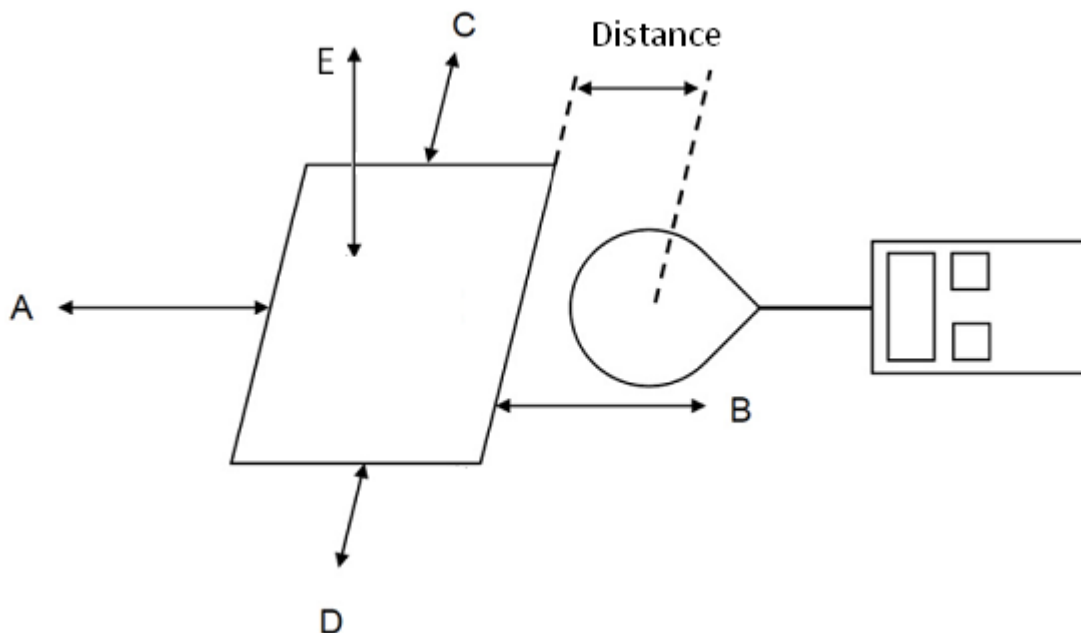

2.3. Test Procedure

- The test was performed on table in anechoic chamber.
- The probe was placed at 20 cm surrounding, for test setup.
- The highest emission level was recorded and compared with limit as soon as measurement of each point; A, B, C, D, E were completed.


2.4. Test Result for Test setup :

E-field strength					
Frequency range	110.5 to 205 kHz			360kHz	
Test Mode	5W	7.5W	10W	15W	25W
Position A(V/m)	1.537	1.526	1.402	1.511	1.461
Position B(V/m)	1.651	1.604	1.412	1.345	1.445
Position C(V/m)	1.762	1.831	1.352	1.451	1.696
Position D(V/m)	1.710	1.942	2.041	1.651	1.531
Position E(V/m)	3.247	2.853	3.221	3.675	3.852
Limits (V/m)	614				


H-field strength					
Frequency range	110.5 to 205 kHz			360kHz	
Test Mode	5W	7.5W	10W	15W	25W
Position A(A/m)	0.040	0.043	0.051	0.048	0.042
Position B(A/m)	0.041	0.044	0.040	0.050	0.044
Position C(A/m)	0.043	0.046	0.043	0.049	0.053
Position D(A/m)	0.045	0.040	0.047	0.049	0.049
Position E(A/m)	0.053	0.061	0.058	0.052	0.063
Limits (A/m)	1.630				

3. Test photo


Position A

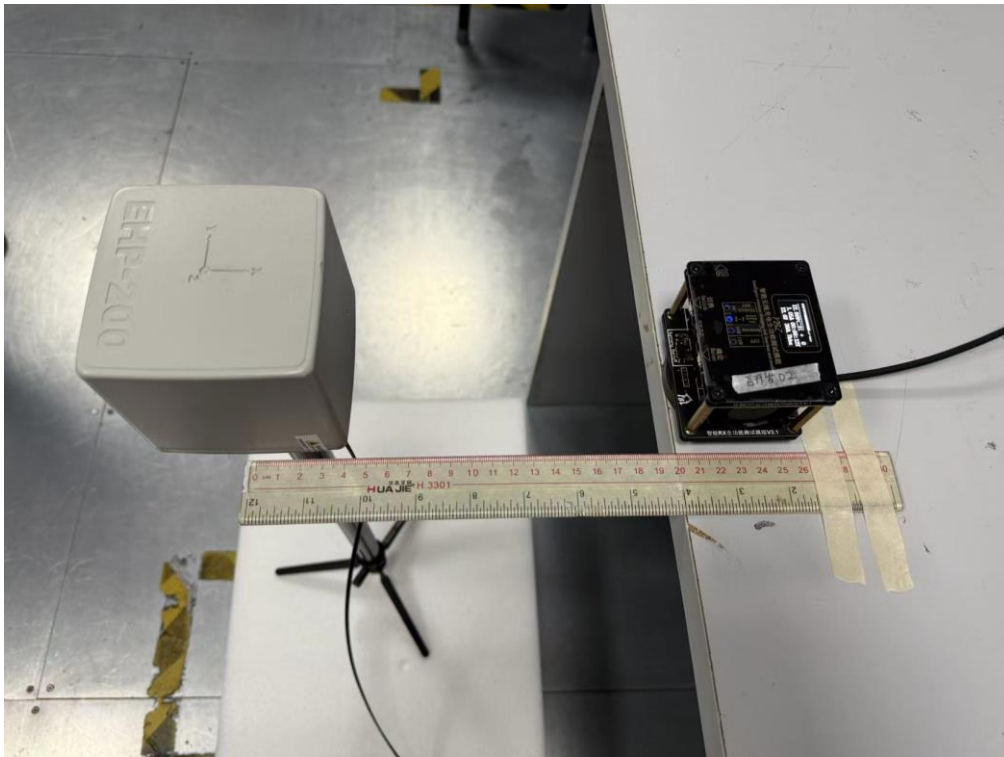


Position B

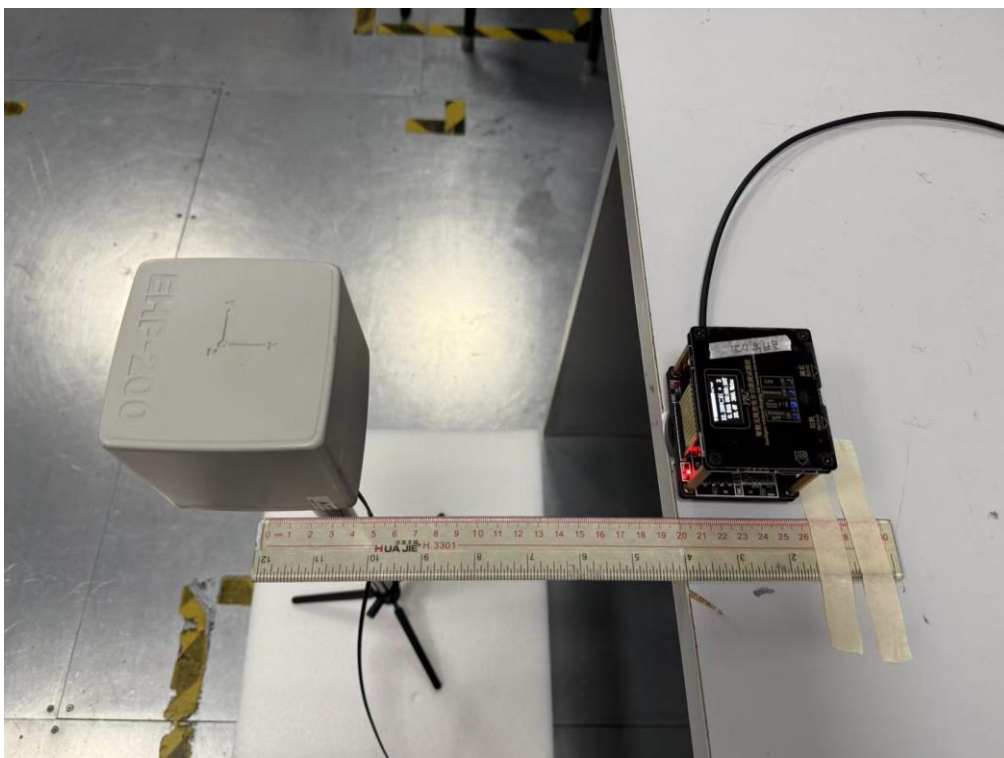


Position C

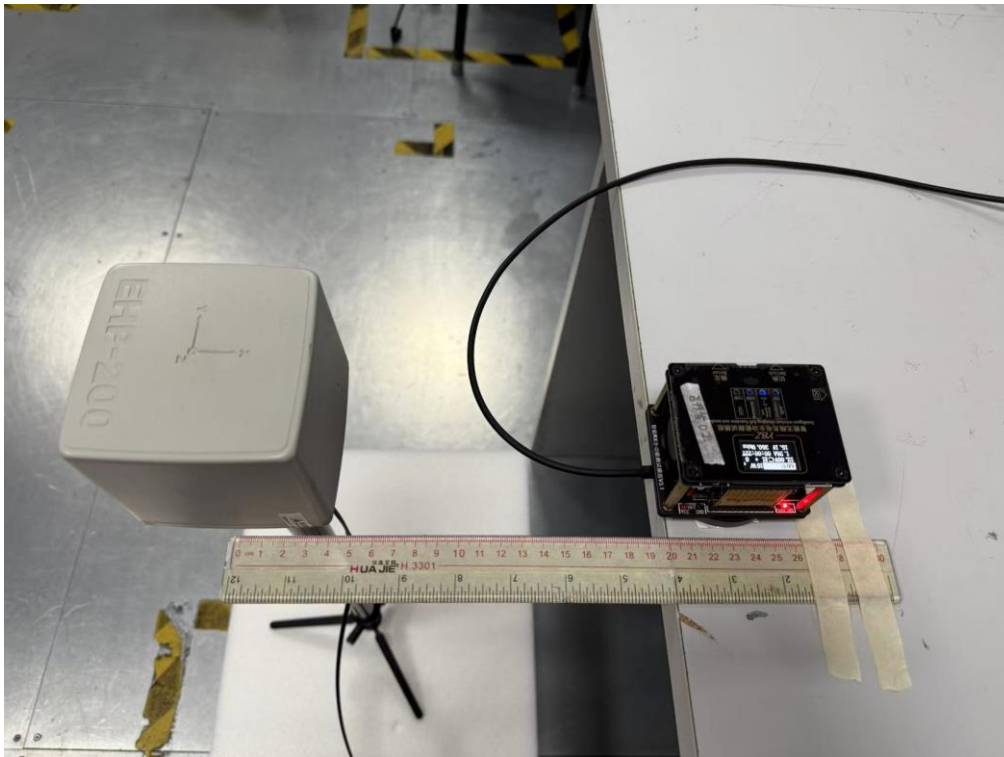

Position D

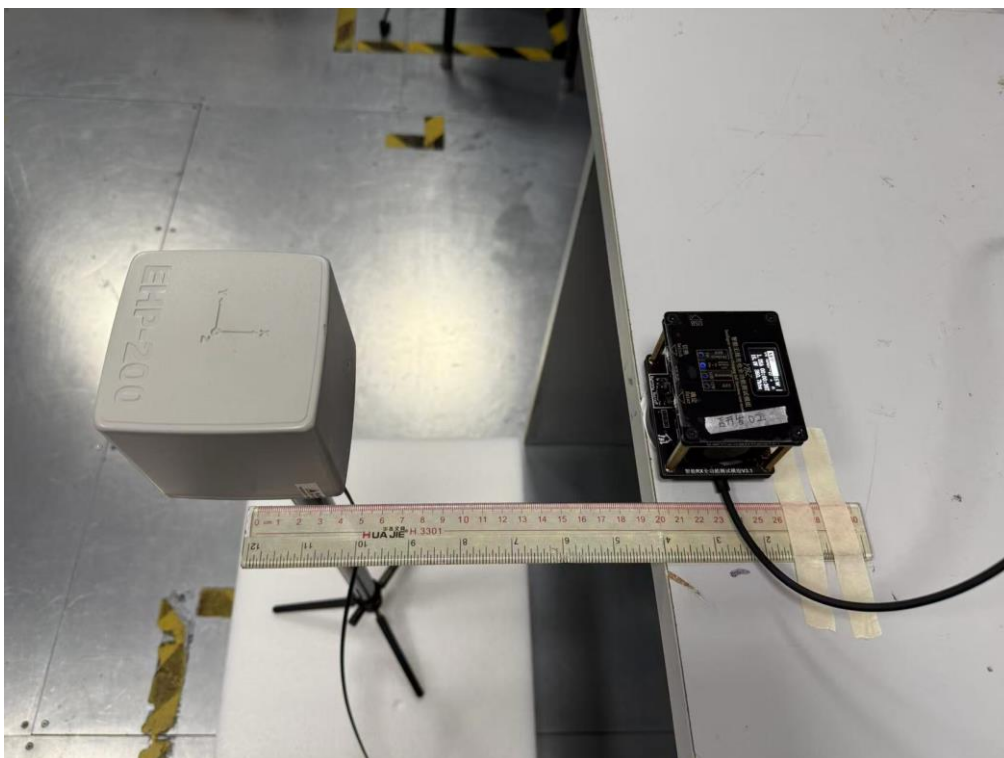

Position E

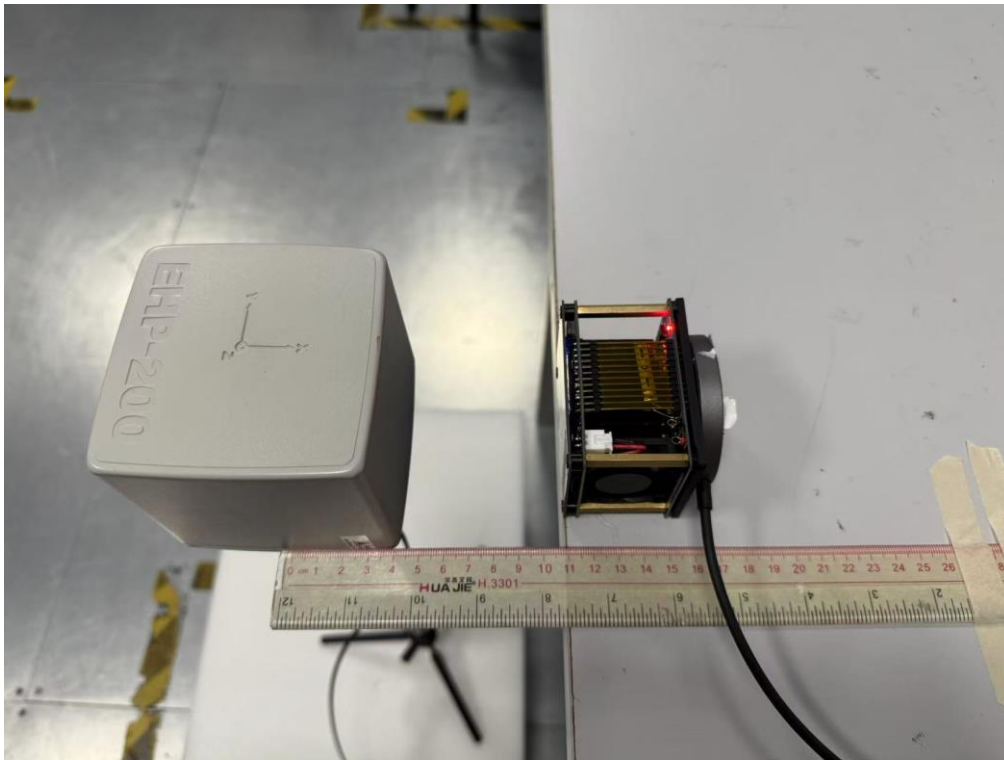

End of Test Report