

System Performance Check Report for D2600V2 - SN1036

Exposure Conditions

Frequency [MHz] Channel Number	2600.000 0	TSL Permittivity	39.2
Group UID	CW 0-	TSL Conductivity [S/m]	1.86
Conversion Factor	7.5	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7810 2026-05-06	Phantom	Twin-SAM V4.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1434 2026-04-30	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		80.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.54	2.53
psSAR10g [W/Kg]	1.14	1.16
Power Drift [±0.2 dB]	N/A	0.00

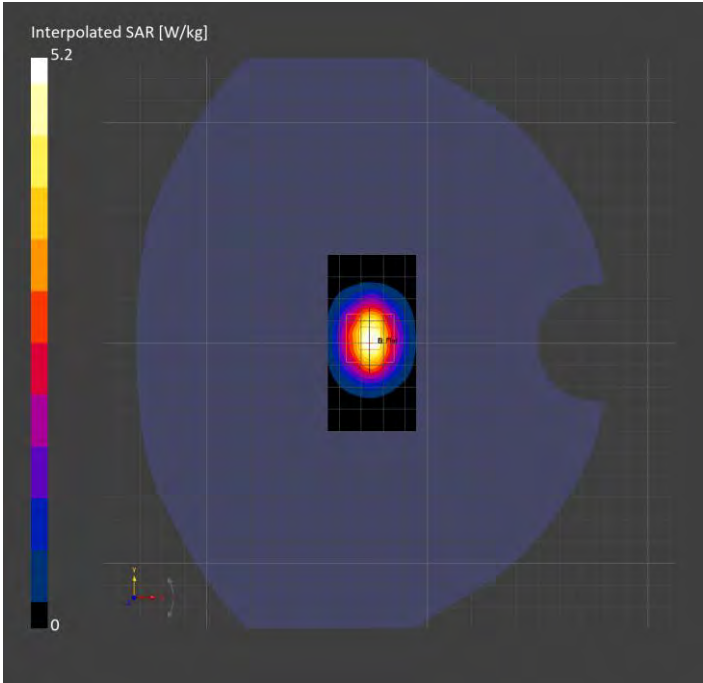

System Performance Check Report for D2300V2 - SN1058

Exposure Conditions

Frequency [MHz] Channel Number	2300.000 0	TSL Permittivity	39.5
Group UID	CW 0-	TSL Conductivity [S/m]	1.62
Conversion Factor	7.74	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7810 2026-05-06	Phantom	Twin-SAM V4.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1434 2026-04-30	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		81.6
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.19	2.22
psSAR10g [W/Kg]	1.06	1.08
Power Drift [±0.2 dB]	N/A	-0.02

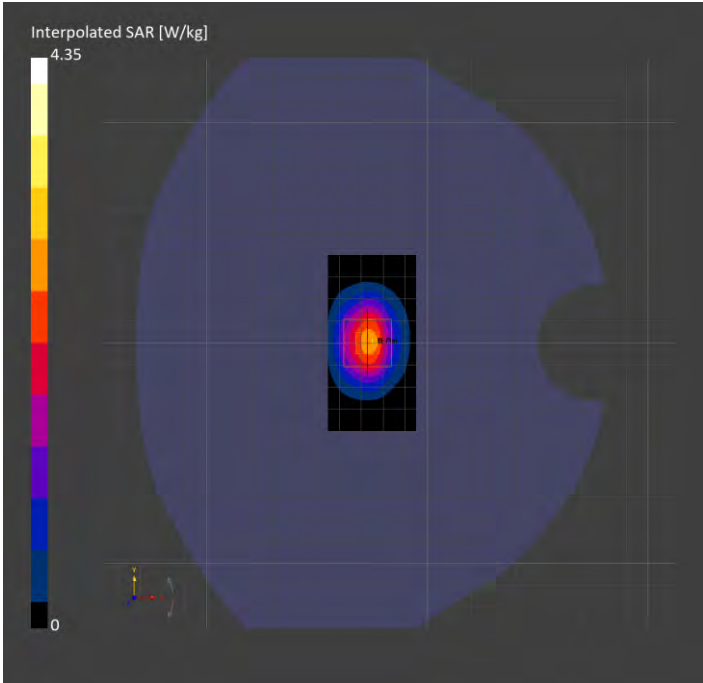

System Performance Check Report for D2300V2 - SN1002

Exposure Conditions

Frequency [MHz] Channel Number	2300.000 0	TSL Permittivity	43.0
Group UID	CW 0-	TSL Conductivity [S/m]	1.65
Conversion Factor	7.74	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7810 2026-05-06	Phantom	Twin-SAM V4.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1434 2026-04-30	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		83.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.5

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.29	2.28
psSAR10g [W/Kg]	1.11	1.13
Power Drift [±0.2 dB]	N/A	-0.01

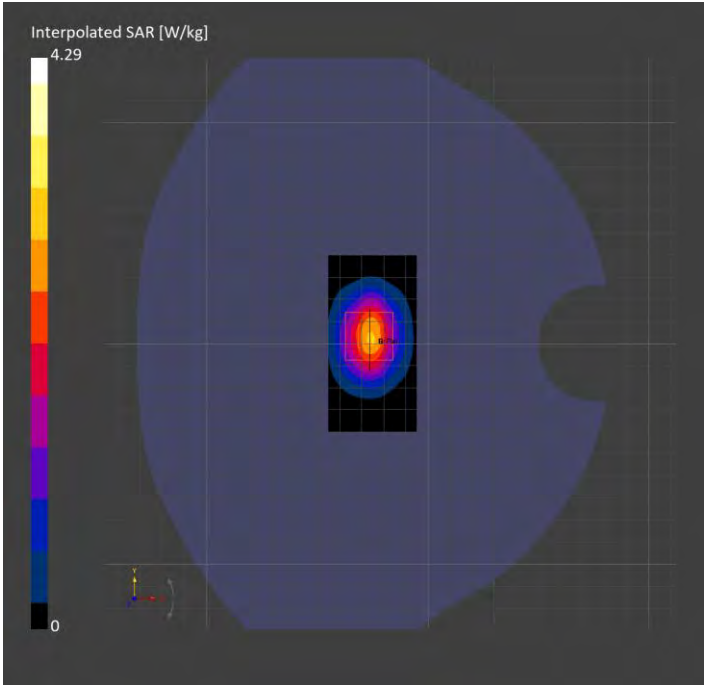

System Performance Check Report for D2600V2 - SN1006

Exposure Conditions

Frequency [MHz] Channel Number	2600.000 0	TSL Permittivity	42.5
Group UID	CW 0-	TSL Conductivity [S/m]	1.87
Conversion Factor	7.5	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7810 2026-05-06	Phantom	Twin-SAM V4.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1434 2026-04-30	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		81.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.35	5.34
psSAR10g [W/Kg]	2.43	2.48
Power Drift [±0.2 dB]	N/A	-0.01

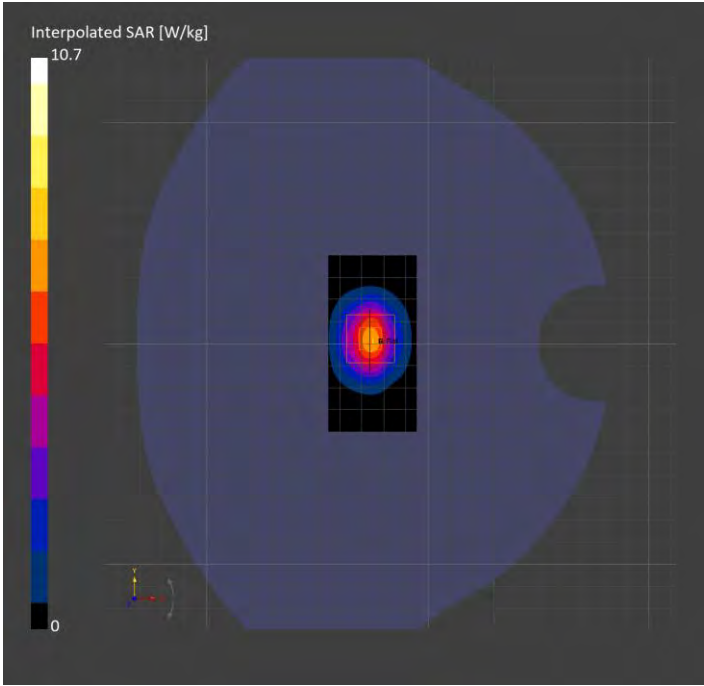

System Performance Check Report for D2300V2 - SN1160

Exposure Conditions

Frequency [MHz] Channel Number	2300.000 0	TSL Permittivity	42.8
Group UID	CW 0-	TSL Conductivity [S/m]	1.61
Conversion Factor	7.22	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7482 2026-04-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1787 2026-04-10	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		83.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	4.65	4.77
psSAR10g [W/Kg]	2.20	2.37
Power Drift [±0.2 dB]	N/A	-0.02

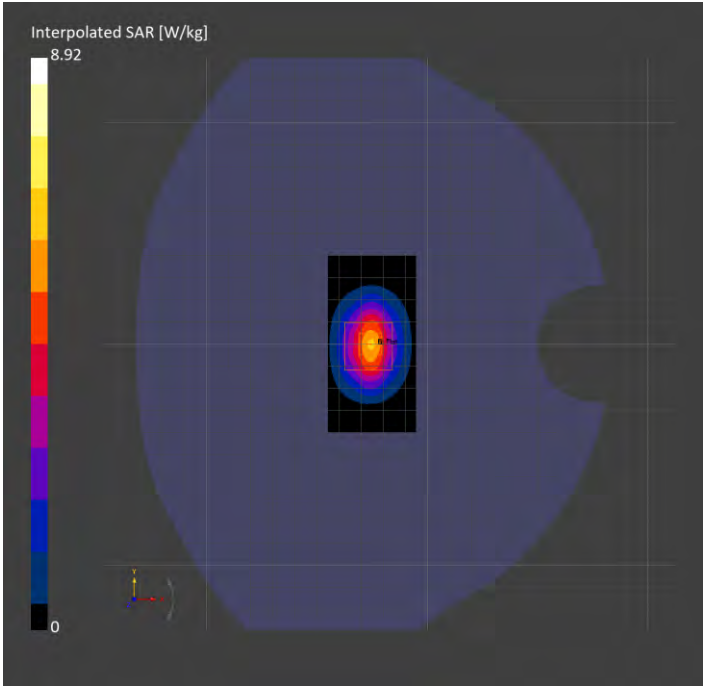

System Performance Check Report for D2300V2 - SN1058

Exposure Conditions

Frequency [MHz] Channel Number	2300.000 0	TSL Permittivity	42.6
Group UID	CW 0-	TSL Conductivity [S/m]	1.56
Conversion Factor	7.22	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7482 2026-04-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1787 2026-04-10	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		83.4
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	4.44	4.51
psSAR10g [W/Kg]	2.11	2.24
Power Drift [±0.2 dB]	N/A	-0.03

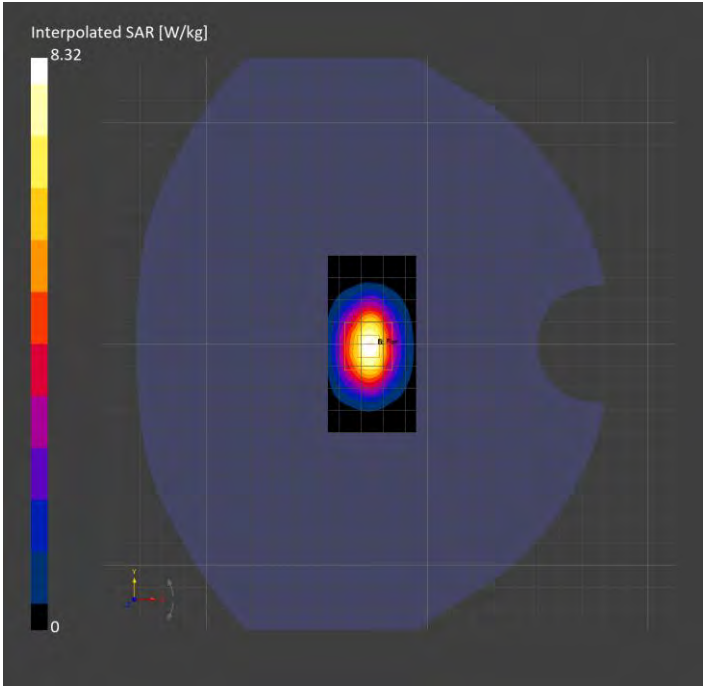

System Performance Check Report for D2600V2 - SN1036

Exposure Conditions

Frequency [MHz] Channel Number	2600.000 0	TSL Permittivity	42.6
Group UID	CW 0-	TSL Conductivity [S/m]	1.84
Conversion Factor	7.0	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7482 2026-04-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1787 2026-04-10	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		81.7
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.15	5.24
psSAR10g [W/Kg]	2.28	2.43
Power Drift [±0.2 dB]	N/A	-0.03

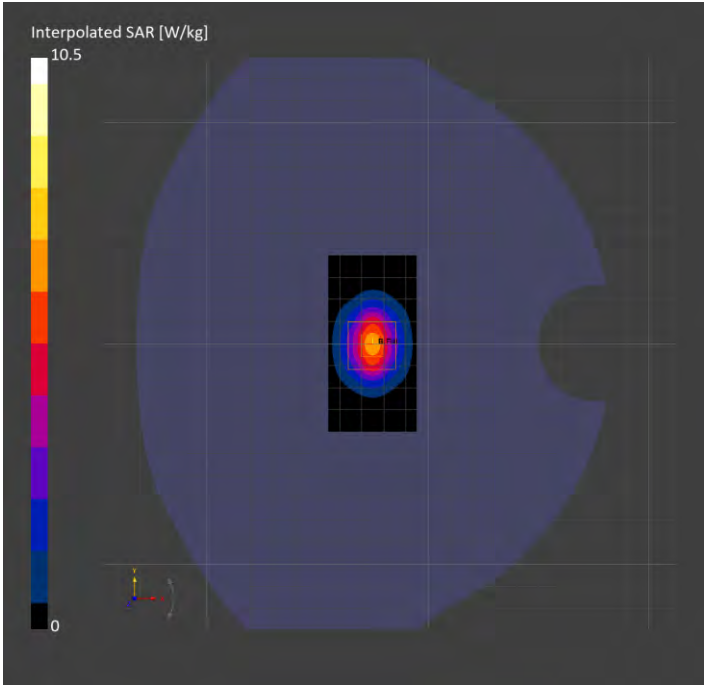

System Performance Check Report for D2300V2 - SN1002

Exposure Conditions

Frequency [MHz] Channel Number	2300.000 0	TSL Permittivity	42.5
Group UID	CW 0-	TSL Conductivity [S/m]	1.56
Conversion Factor	7.22	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7482 2026-04-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1787 2026-04-10	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		83.7
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	4.47	4.52
psSAR10g [W/Kg]	2.11	2.25
Power Drift [±0.2 dB]	N/A	-0.02

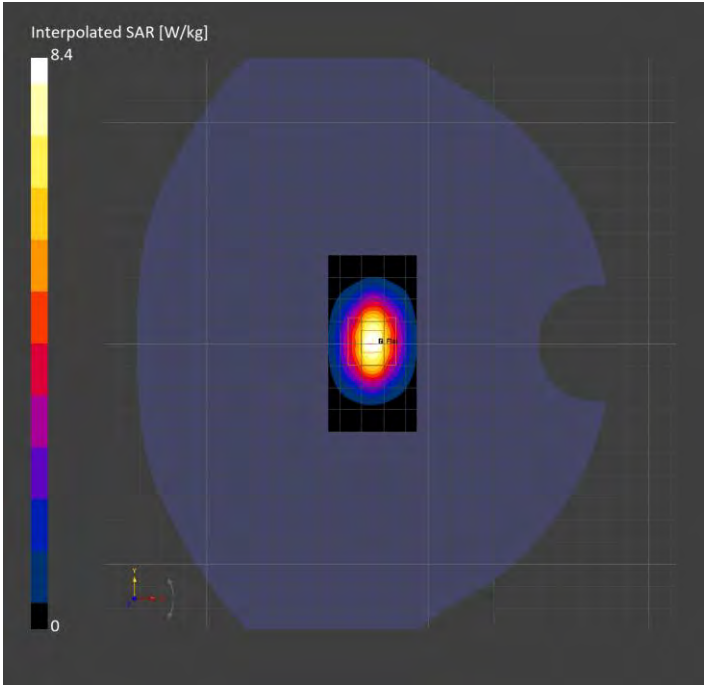

System Performance Check Report for D2600V2 - SN1006

Exposure Conditions

Frequency [MHz] Channel Number	2600.000 0	TSL Permittivity	42.1
Group UID	CW 0-	TSL Conductivity [S/m]	1.80
Conversion Factor	7.0	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7482 2026-04-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1787 2026-04-10	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		82.6
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	4.98	5.08
psSAR10g [W/Kg]	2.20	2.36
Power Drift [±0.2 dB]	N/A	-0.01

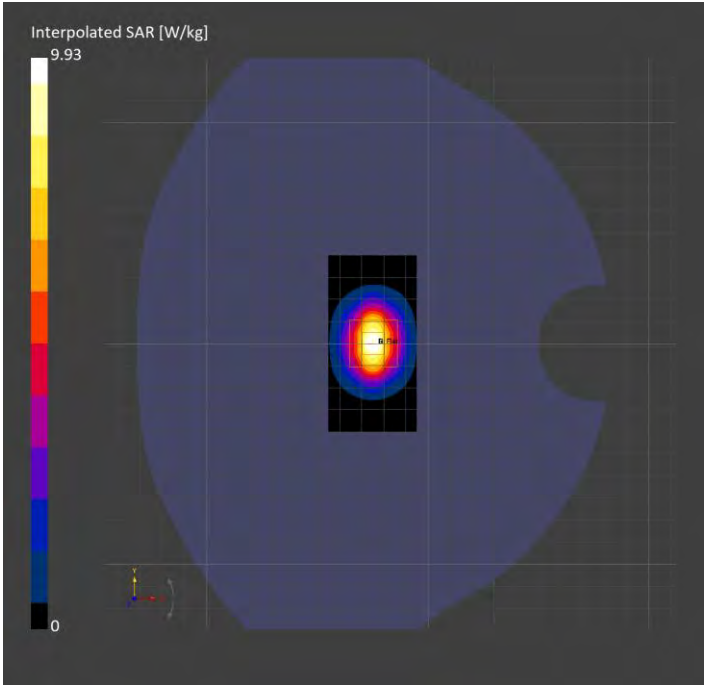

System Performance Check Report for D2300V2 - SN1160

Exposure Conditions

Frequency [MHz] Channel Number	2300.000 0	TSL Permittivity	40.9
Group UID	CW 0-	TSL Conductivity [S/m]	1.62
Conversion Factor	7.73	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7569 2026-04-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1547 2026-04-14	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		79.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.1

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.29	5.24
psSAR10g [W/Kg]	2.53	2.56
Power Drift [±0.2 dB]	N/A	-0.08

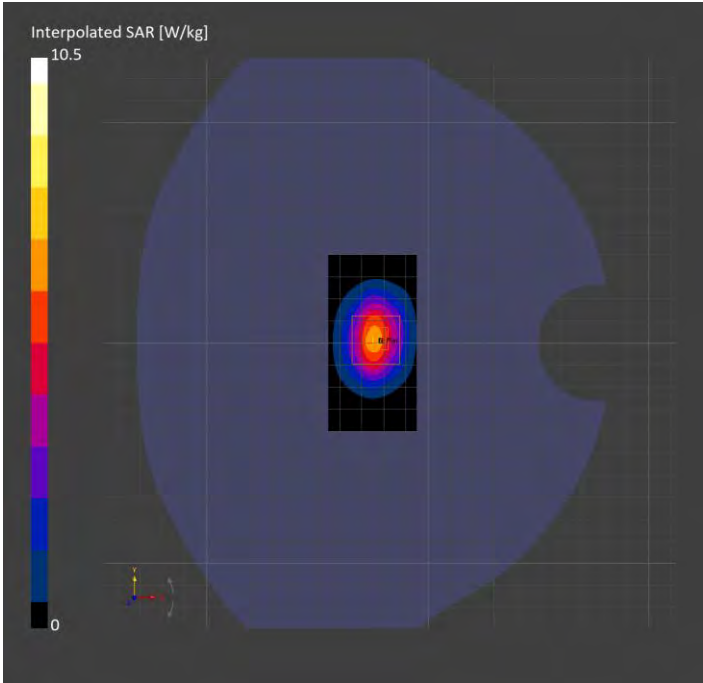

System Performance Check Report for D2600V2 - SN1036

Exposure Conditions

Frequency [MHz] Channel Number	2600.000 0	TSL Permittivity	38.3
Group UID	CW 0-	TSL Conductivity [S/m]	1.86
Conversion Factor	7.46	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7569 2026-04-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1547 2026-04-14	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		80.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.1

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.92	2.96
psSAR10g [W/Kg]	1.32	1.37
Power Drift [±0.2 dB]	N/A	-0.01

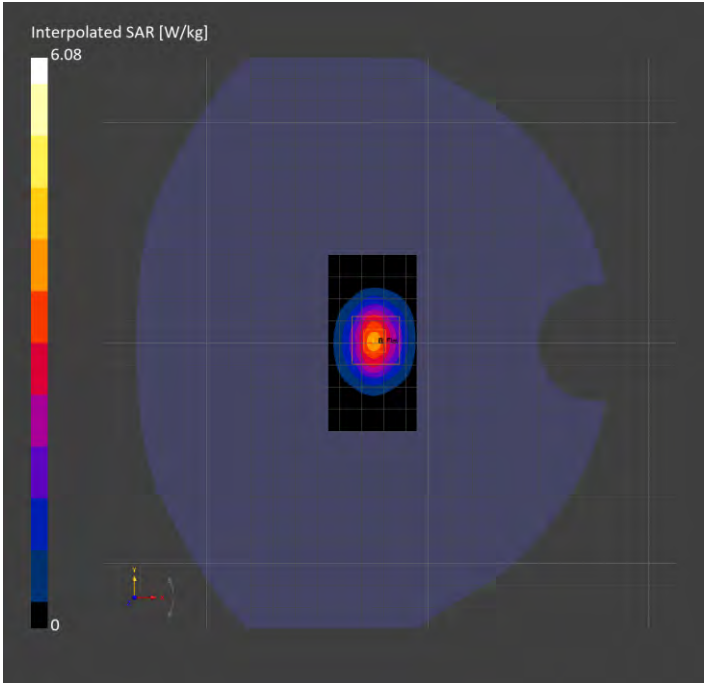

System Performance Check Report for D2300V2 - SN1058

Exposure Conditions

Frequency [MHz] Channel Number	2300.000 0	TSL Permittivity	41.2
Group UID	CW 0-	TSL Conductivity [S/m]	1.66
Conversion Factor	7.73	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7569 2026-04-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1547 2026-04-14	TSL Type	DAKS 3.5 Head 23.2 deg.C 2026-Jun-04 10_55_14
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		78.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.9

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.06	5.18
psSAR10g [W/Kg]	2.43	2.54
Power Drift [±0.2 dB]	N/A	-0.00

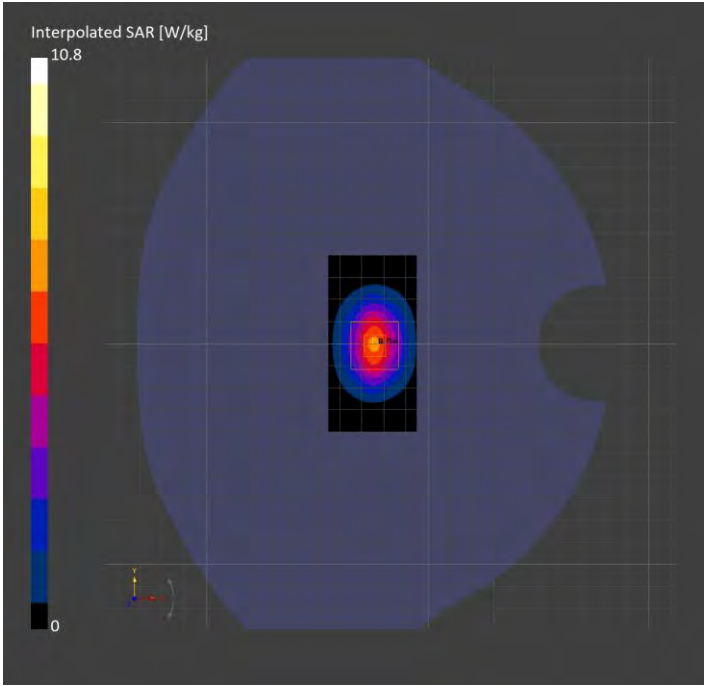

System Performance Check Report for D2300V2 - SN1002

Exposure Conditions

Frequency [MHz] Channel Number	2300.000 0	TSL Permittivity	42.4
Group UID	CW 0-	TSL Conductivity [S/m]	1.63
Conversion Factor	7.73	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7569 2026-04-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1547 2026-04-14	TSL Type	DAK 3.5 Head 22.44 deg.C 2026-Jun-12 02_36_16
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		80.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.25	2.29
psSAR10g [W/Kg]	1.06	1.12
Power Drift [±0.2 dB]	N/A	-0.07

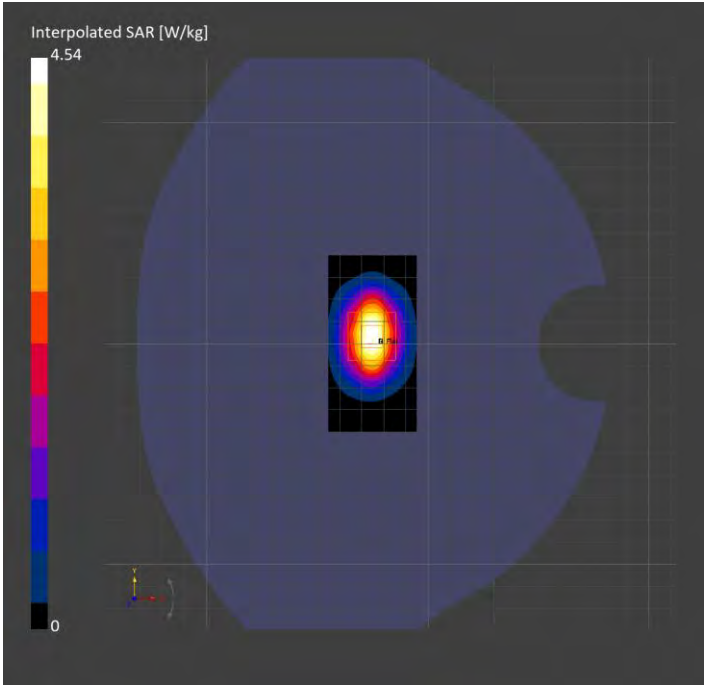

System Performance Check Report for D2600V2 - SN1006

Exposure Conditions

Frequency [MHz] Channel Number	2600.000 0	TSL Permittivity	42.0
Group UID	CW 0-	TSL Conductivity [S/m]	1.85
Conversion Factor	7.46	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7569 2026-04-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1547 2026-04-14	TSL Type	DAK 3.5 Head 22.44 deg.C 2026-Jun-12 02_36_16
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		79.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.44	2.50
psSAR10g [W/Kg]	1.09	1.14
Power Drift [±0.2 dB]	N/A	-0.07

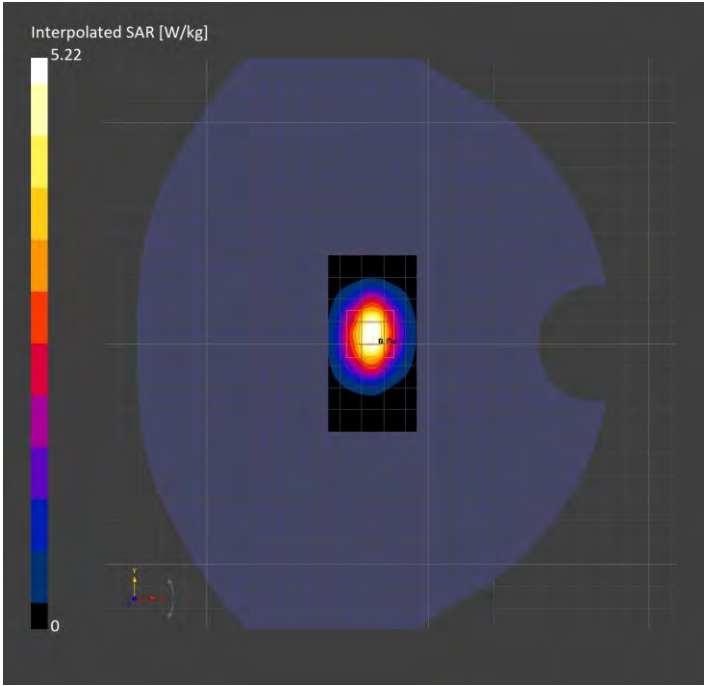

System Performance Check Report for D2300V2 - SN1058

Exposure Conditions

Frequency [MHz] Channel Number	2300.000 0	TSL Permittivity	42.5
Group UID	CW 0-	TSL Conductivity [S/m]	1.57
Conversion Factor	7.31	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3885 2025-10-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1892 2025-11-12	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		81.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.17	5.12
psSAR10g [W/Kg]	2.45	2.46
Power Drift [±0.2 dB]	N/A	-0.12

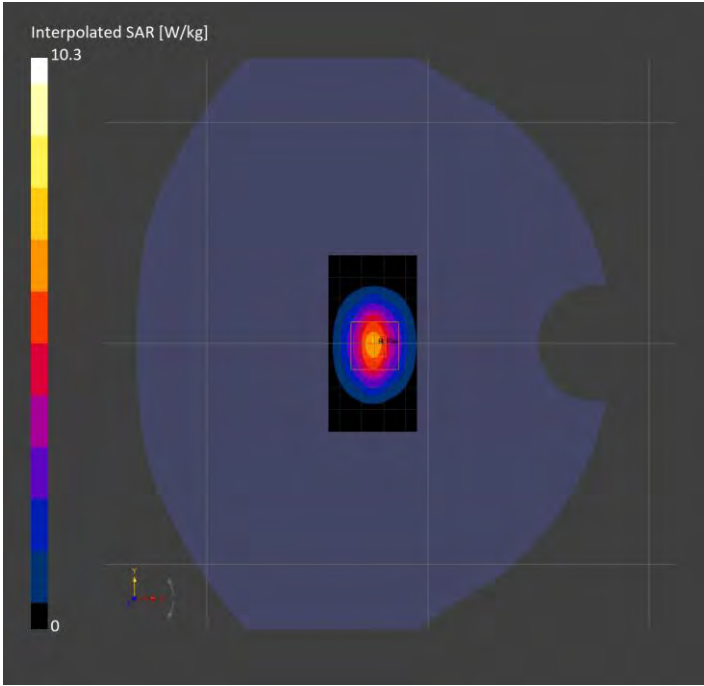

System Performance Check Report for D2600V2 - SN1036

Exposure Conditions

Frequency [MHz] Channel Number	2600.000 0	TSL Permittivity	42.7
Group UID	CW 0-	TSL Conductivity [S/m]	1.87
Conversion Factor	7.05	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3885 2025-10-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1892 2025-11-12	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		81.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.9

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.21	5.29
psSAR10g [W/Kg]	2.39	2.53
Power Drift [±0.2 dB]	N/A	-0.00

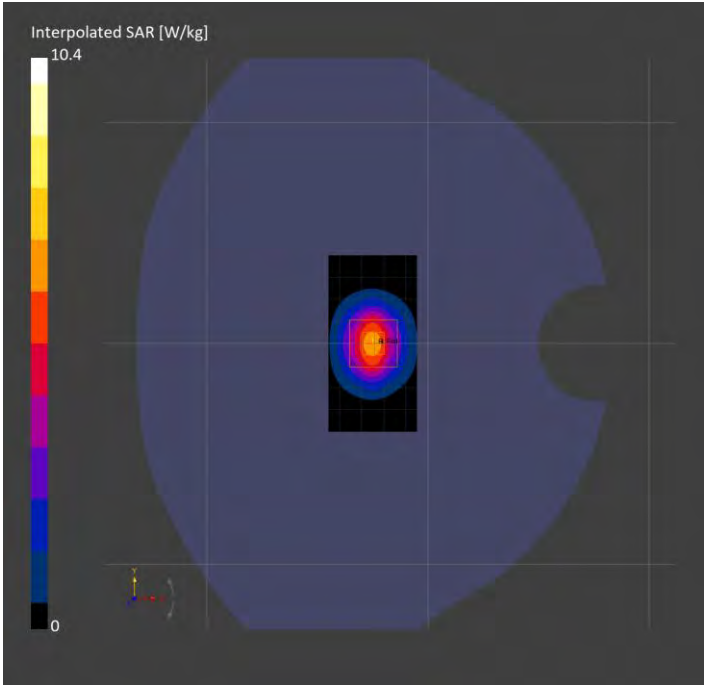

System Performance Check Report for D2300V2 - SN1002

Exposure Conditions

Frequency [MHz] Channel Number	2300.000 0	TSL Permittivity	43.1
Group UID	CW 0-	TSL Conductivity [S/m]	1.58
Conversion Factor	7.31	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3885 2025-10-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1892 2025-11-12	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		82.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.9

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.35	2.36
psSAR10g [W/Kg]	1.14	1.19
Power Drift [±0.2 dB]	N/A	-0.00

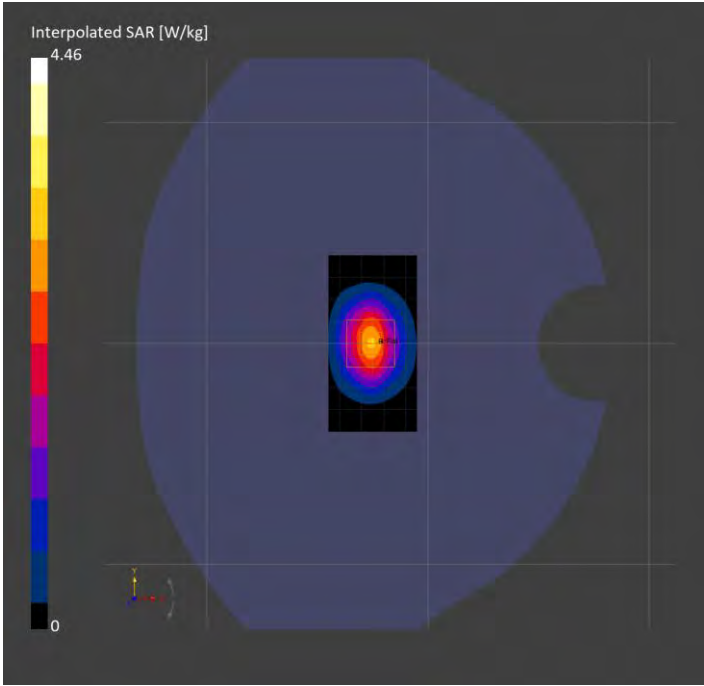

System Performance Check Report for D2600V2 - SN1006

Exposure Conditions

Frequency [MHz] Channel Number	2600.000 0	TSL Permittivity	42.2
Group UID	CW 0-	TSL Conductivity [S/m]	1.83
Conversion Factor	7.05	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3885 2025-10-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1892 2025-11-12	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		81.0
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.9

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.52	2.54
psSAR10g [W/Kg]	1.16	1.22
Power Drift [±0.2 dB]	N/A	0.00

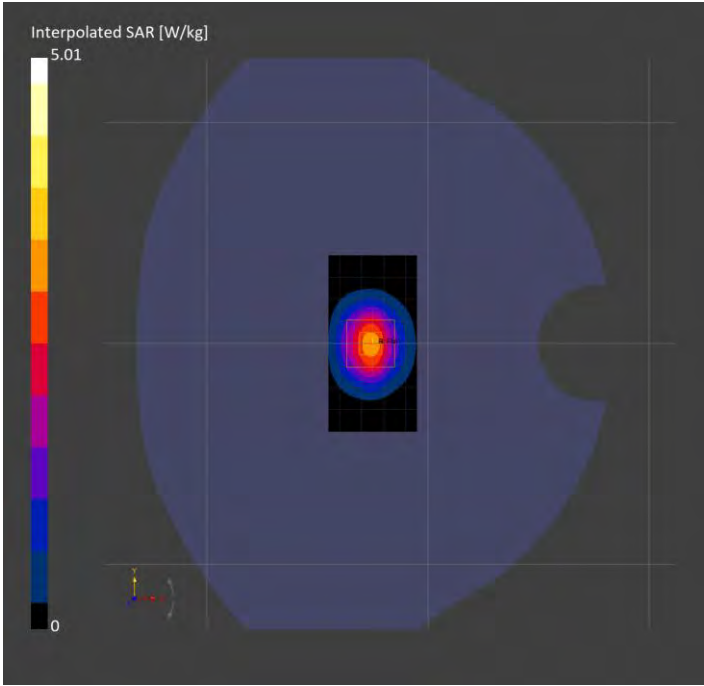

System Performance Check Report for D3700V2 - SN1131

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	38.2
Group UID	CW 0-	TSL Conductivity [S/m]	2.92
Conversion Factor	5.69	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3686 2026-01-15	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1357 2026-01-08	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		75.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.46	6.61
psSAR10g [W/Kg]	2.44	2.47
Power Drift [±0.2 dB]	N/A	0.01

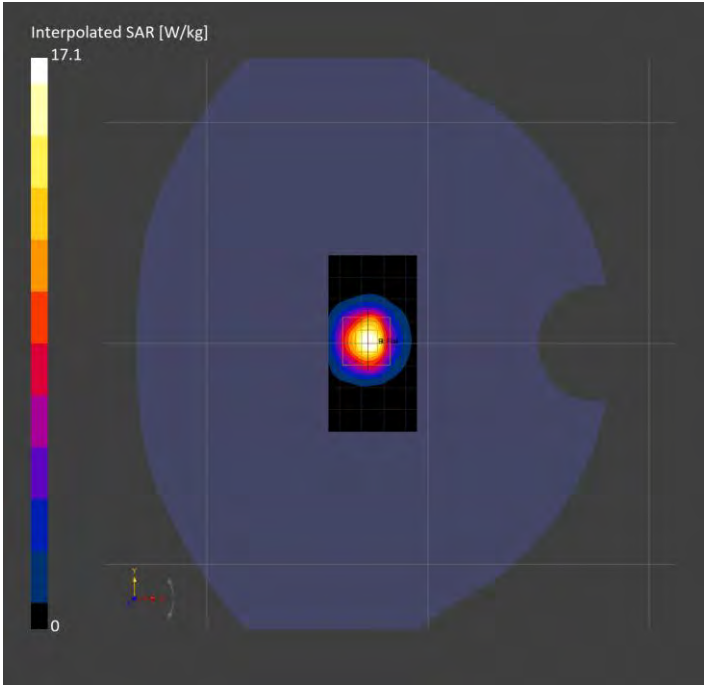

System Performance Check Report for D3700V2 - SN1039

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	39.6
Group UID	CW 0-	TSL Conductivity [S/m]	2.96
Conversion Factor	5.69	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3686 2026-01-15	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1357 2026-01-08	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		75.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.1

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.10	3.20
psSAR10g [W/Kg]	1.13	1.19
Power Drift [±0.2 dB]	N/A	0.04

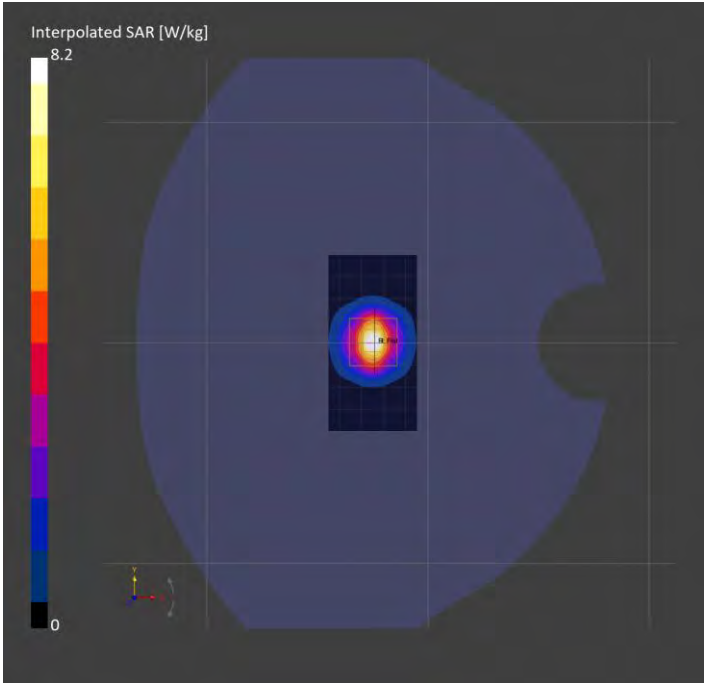

System Performance Check Report for D3500V2 - SN1182

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	41.4
Group UID	CW 0-	TSL Conductivity [S/m]	2.74
Conversion Factor	5.76	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3686 2026-01-15	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1357 2026-01-08	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		76.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.00	2.99
psSAR10g [W/Kg]	1.14	1.15
Power Drift [±0.2 dB]	N/A	-0.17

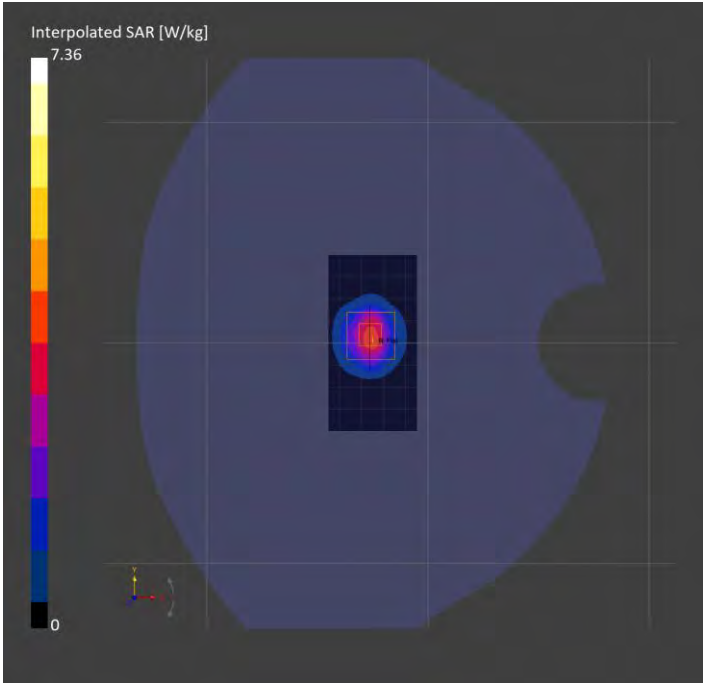

System Performance Check Report for D3900V2 - SN1115

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	40.8
Group UID	CW 0-	TSL Conductivity [S/m]	3.14
Conversion Factor	5.63	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3686 2026-01-15	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1357 2026-01-08	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		74.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.1

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.96	3.17
psSAR10g [W/Kg]	1.07	1.13
Power Drift [±0.2 dB]	N/A	-0.12

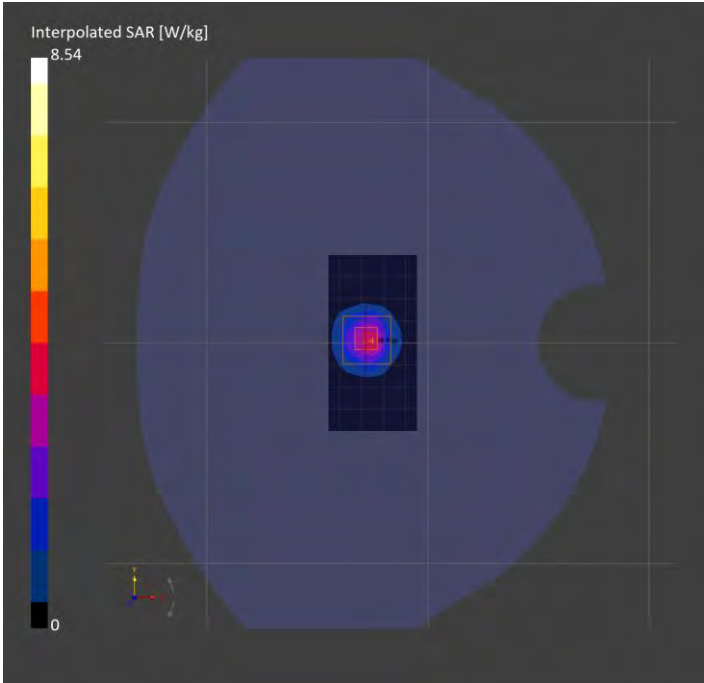

System Performance Check Report for D3500V2 - SN1011

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	39.5
Group UID	CW 0-	TSL Conductivity [S/m]	2.75
Conversion Factor	5.76	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3686 2026-01-15	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1357 2026-01-08	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		76.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.45	3.59
psSAR10g [W/Kg]	1.34	1.39
Power Drift [±0.2 dB]	N/A	0.04

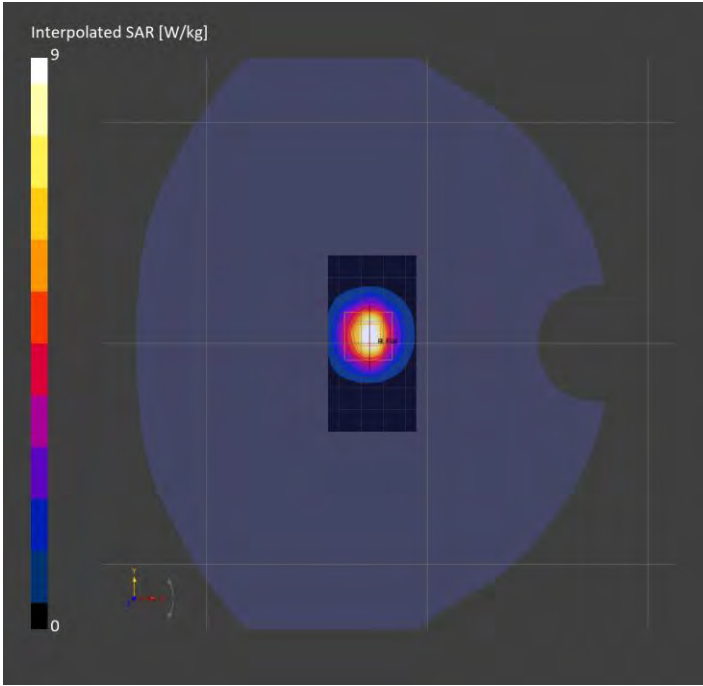

System Performance Check Report for D3900V2 - SN1102

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	38.5
Group UID	CW 0-	TSL Conductivity [S/m]	3.13
Conversion Factor	5.63	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3686 2026-01-15	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1357 2026-01-08	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		74.6
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.56	3.73
psSAR10g [W/Kg]	1.30	1.34
Power Drift [±0.2 dB]	N/A	-0.03

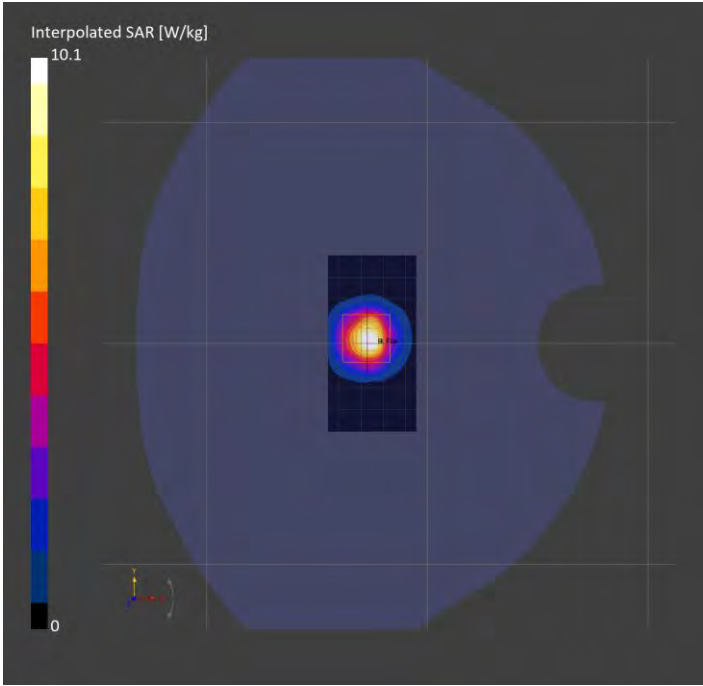

System Performance Check Report for D3500V2 - SN1060

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	39.3
Group UID	CW 0-	TSL Conductivity [S/m]	2.88
Conversion Factor	5.76	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3686 2026-01-15	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1357 2026-01-08	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		77.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.30	3.38
psSAR10g [W/Kg]	1.31	1.31
Power Drift [±0.2 dB]	N/A	0.02

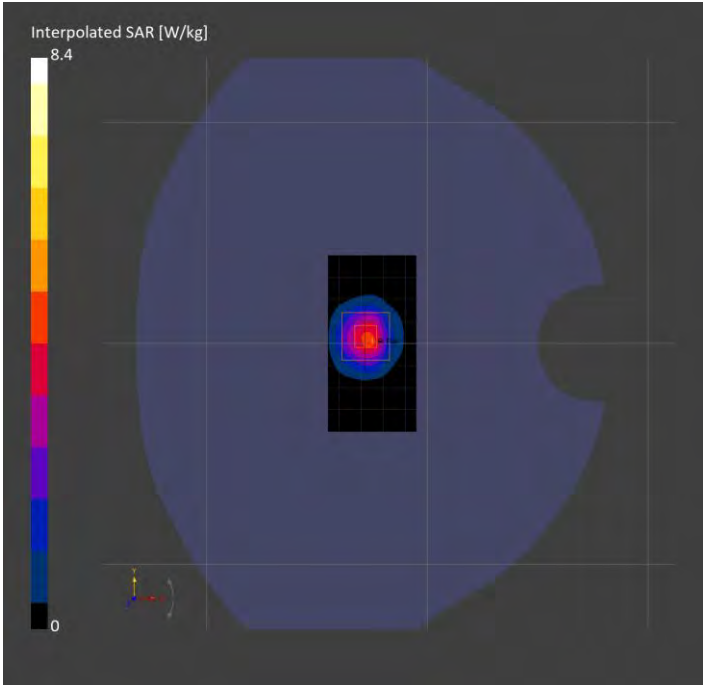

System Performance Check Report for D3700V2 - SN1039

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	40.8
Group UID	CW 0-	TSL Conductivity [S/m]	2.90
Conversion Factor	5.76	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3749 2026-01-15	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1784 2026-04-13	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		74.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.16	6.41
psSAR10g [W/Kg]	2.26	2.36
Power Drift [±0.2 dB]	N/A	-0.01

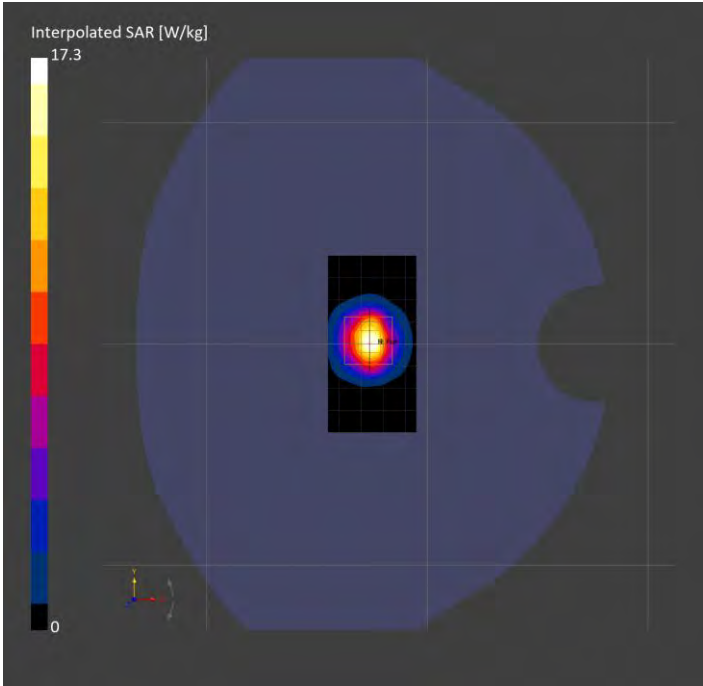

System Performance Check Report for D3500V2 - SN1011

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	39.3
Group UID	CW 0--	TSL Conductivity [S/m]	2.71
Conversion Factor	5.79	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3749 2026-01-15	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1784 2026-04-13	TSL Type	HBBL-600-10000
Software Version	16.4.0.5005		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		78.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.26	6.50
psSAR10g [W/Kg]	2.48	2.50
Power Drift [±0.2 dB]	N/A	0.00

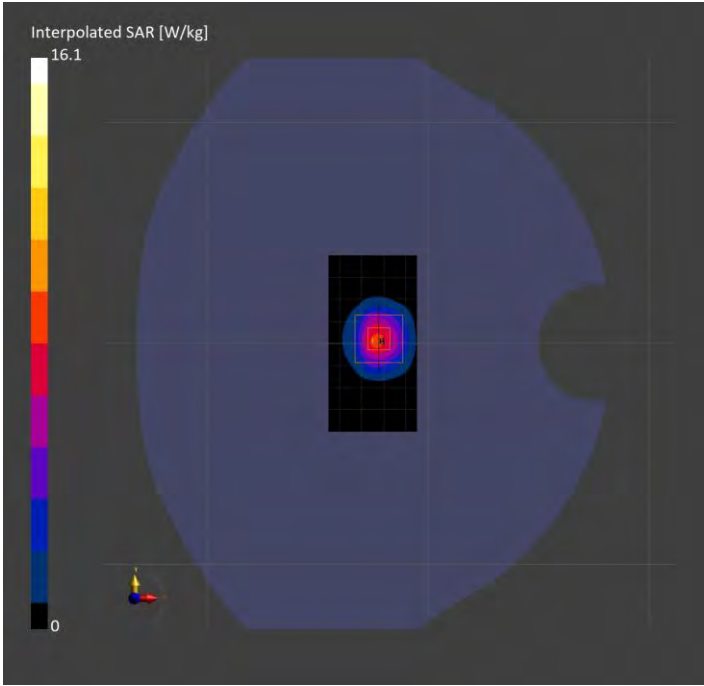

System Performance Check Report for D3500V2 - SN1060

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	38.7
Group UID	CW 0-	TSL Conductivity [S/m]	2.73
Conversion Factor	5.79	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3749 2026-01-15	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1784 2026-04-13	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		77.0
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.79	6.80
psSAR10g [W/Kg]	2.58	2.62
Power Drift [±0.2 dB]	N/A	0.00

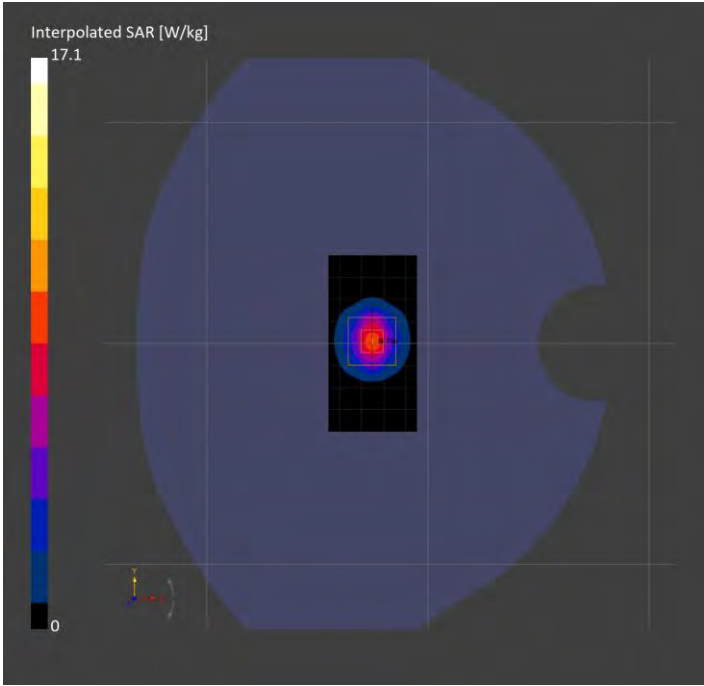

System Performance Check Report for D3900V2 - SN1102

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	39.5
Group UID	CW 0-	TSL Conductivity [S/m]	3.17
Conversion Factor	5.71	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3749 2026-01-15	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1784 2026-04-13	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		75.7
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.98	7.55
psSAR10g [W/Kg]	2.63	2.68
Power Drift [±0.2 dB]	N/A	0.01

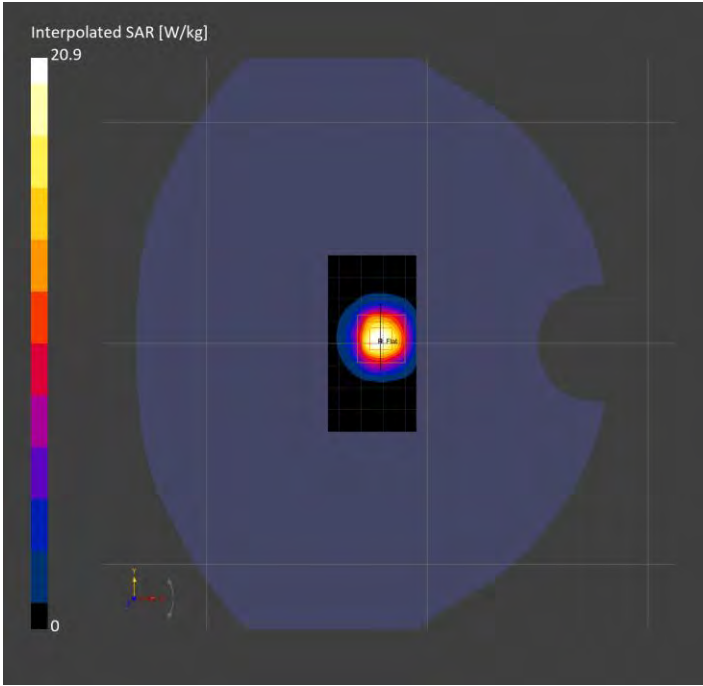

System Performance Check Report for CLA-13 - SN1008

Exposure Conditions

Band		TSL Permittivity	53.4
Frequency [MHz] Channel Number	13.000 0	TSL Conductivity [S/m]	0.679
Group UID	CW 0-	Phantom Section TSL	Flat HSL
Conversion Factor	13.93	Test Distance [mm]	

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3749 2026-01-15	Phantom	ELI V4.0 (20deg probe tilt)
DAE Calibration Date	DAE4 Sn1784 2026-04-13	TSL Type	DAK 12 Head 24.71 deg.C 2026-Jun-03 02_41_02
Software Version	17.0.4.7034		

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		74.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		14.5
Peak SAR [W/kg], SAR Peak Location [mm]	N/A	1.02, -1.0, 4.2, -179.5

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.522	0.503
psSAR10g [W/Kg]	0.418	0.309
Power Drift [±0.2 dB]	N/A	-0.01

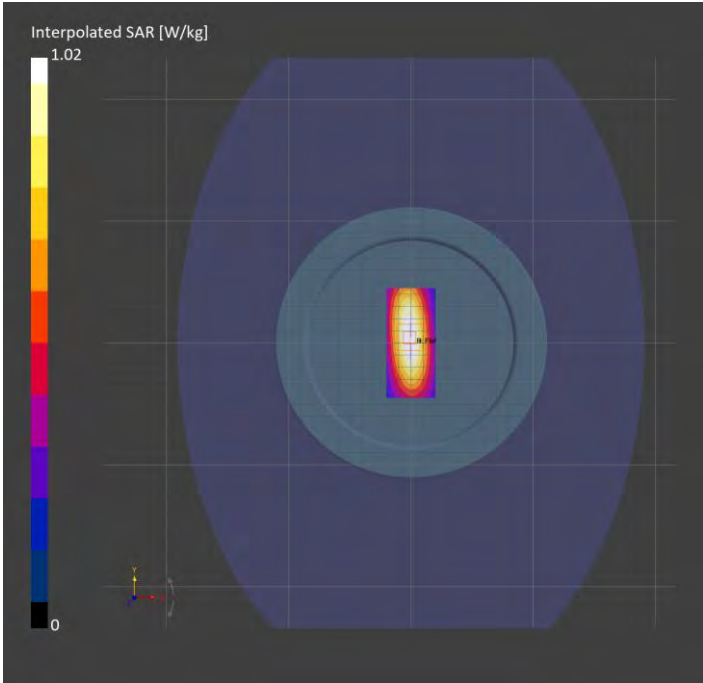

System Performance Check Report for D3900V2 - SN1115

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	38.5
Group UID	CW 0-	TSL Conductivity [S/m]	3.05
Conversion Factor	5.71	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3749 2026-01-15	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1784 2026-04-13	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		73.0
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.72	7.10
psSAR10g [W/Kg]	2.40	2.54
Power Drift [±0.2 dB]	N/A	-0.06

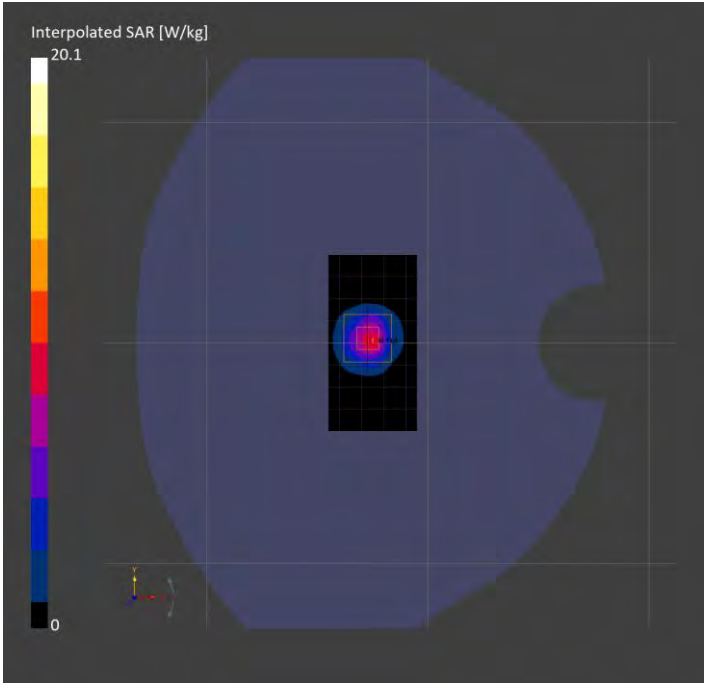

System Performance Check Report for D3500V2 - SN1011

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	39.2
Group UID	CW 0-	TSL Conductivity [S/m]	2.72
Conversion Factor	6.35	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7448 2026-02-17	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1380 2026-02-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		76.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.1

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.20	6.01
psSAR10g [W/Kg]	2.34	2.29
Power Drift [±0.2 dB]	N/A	0.01

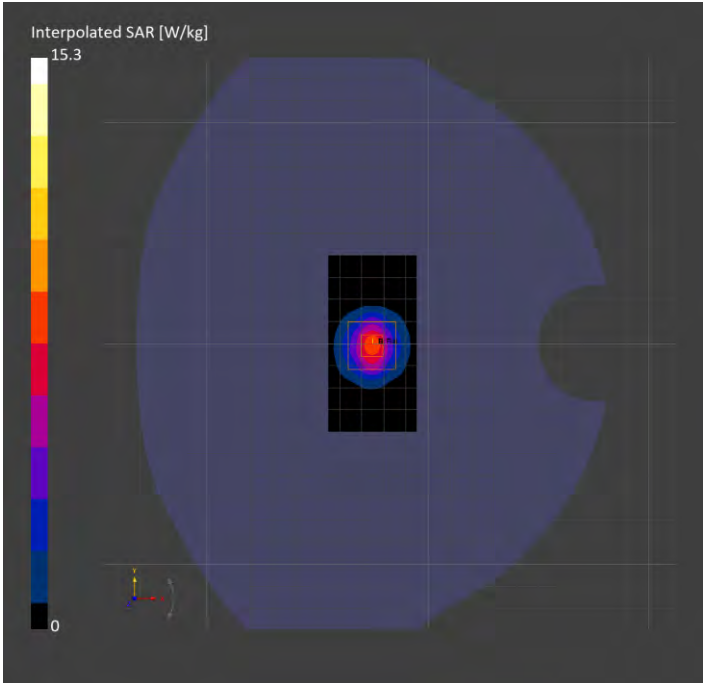

System Performance Check Report for D3700V2 - SN1131

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	38.9
Group UID	CW 0-	TSL Conductivity [S/m]	2.90
Conversion Factor	6.35	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7448 2026-02-17	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1380 2026-02-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		76.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.06	6.05
psSAR10g [W/Kg]	2.25	2.25
Power Drift [±0.2 dB]	N/A	-0.00

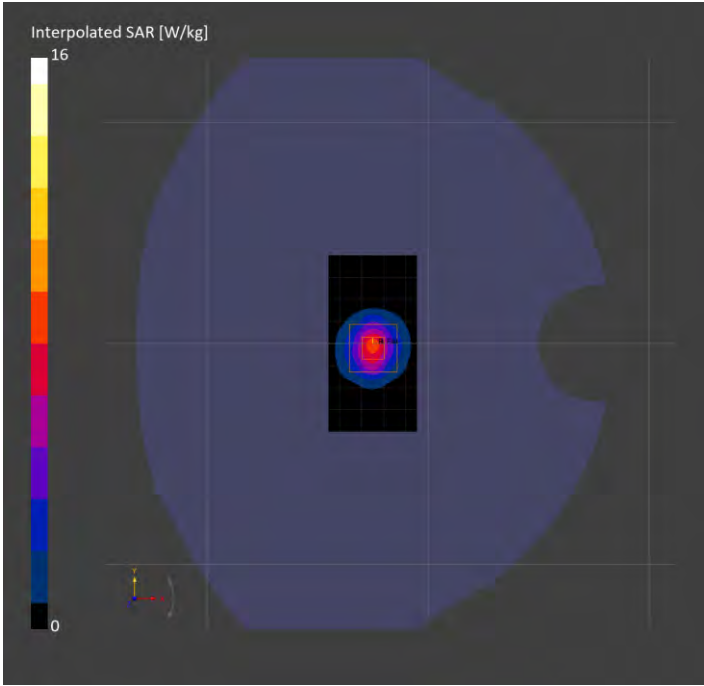

System Performance Check Report for D3900V2 - SN1102

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	38.6
Group UID	CW 0-	TSL Conductivity [S/m]	3.10
Conversion Factor	6.25	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7448 2026-02-17	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1380 2026-02-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		74.6
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.38	6.39
psSAR10g [W/Kg]	2.23	2.25
Power Drift [±0.2 dB]	N/A	0.00

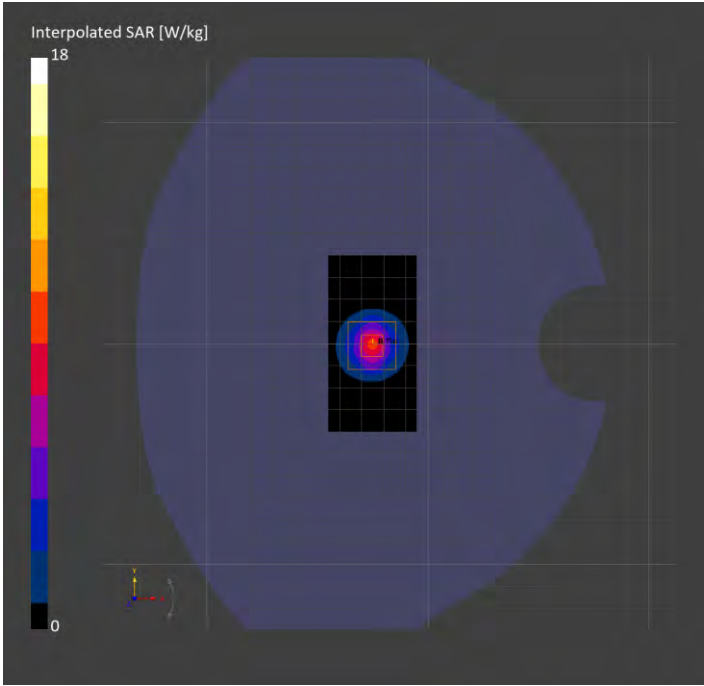

System Performance Check Report for D3500V2 - SN1060

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	40.8
Group UID	CW 0-	TSL Conductivity [S/m]	2.72
Conversion Factor	6.35	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7448 2026-02-17	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1380 2026-02-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		77.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.83	6.02
psSAR10g [W/Kg]	2.22	2.34
Power Drift [±0.2 dB]	N/A	-0.02

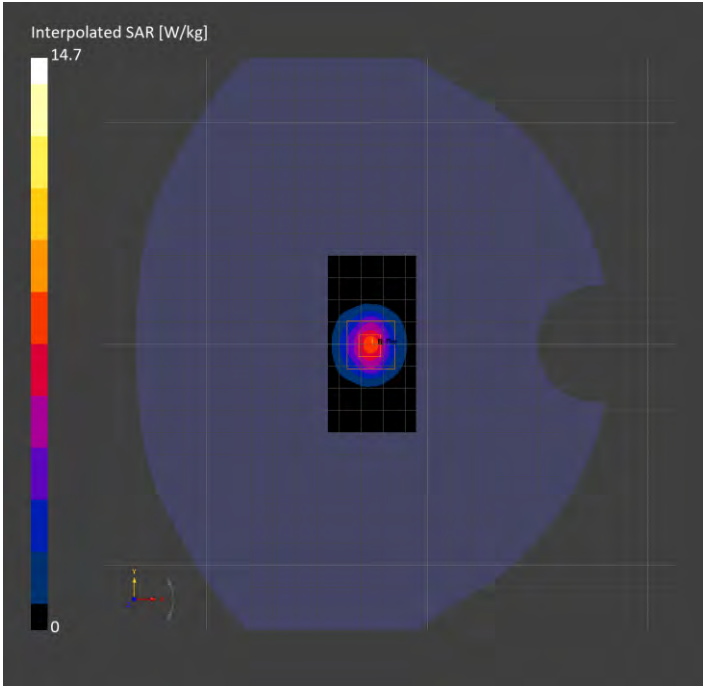

System Performance Check Report for D3700V2 - SN1039

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	40.5
Group UID	CW 0-	TSL Conductivity [S/m]	2.93
Conversion Factor	6.35	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7448 2026-02-17	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1380 2026-02-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		76.0
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.06	6.34
psSAR10g [W/Kg]	2.26	2.39
Power Drift [±0.2 dB]	N/A	-0.09

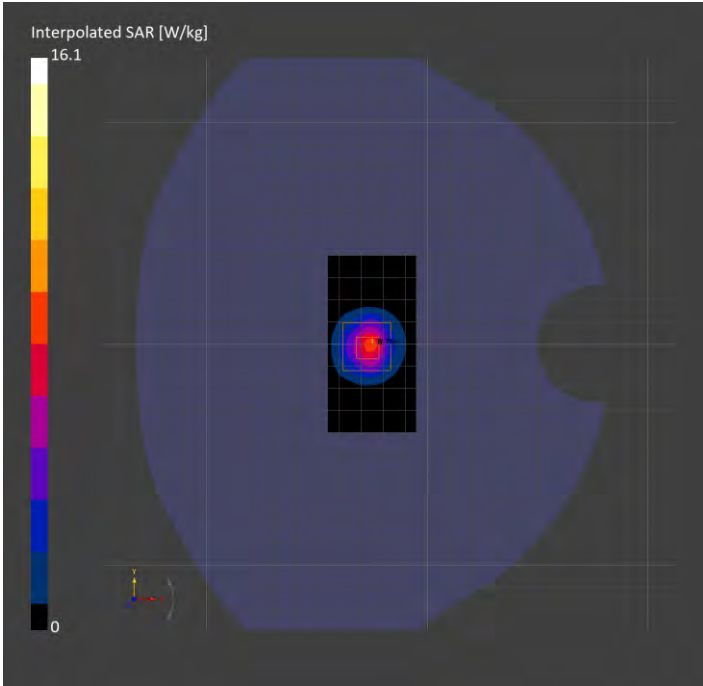

System Performance Check Report for D3700V2 - SN1110

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	40.4
Group UID	CW 0-	TSL Conductivity [S/m]	2.93
Conversion Factor	6.35	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7448 2026-02-17	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1380 2026-02-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		76.4
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.28	6.44
psSAR10g [W/Kg]	2.37	2.42
Power Drift [±0.2 dB]	N/A	0.00

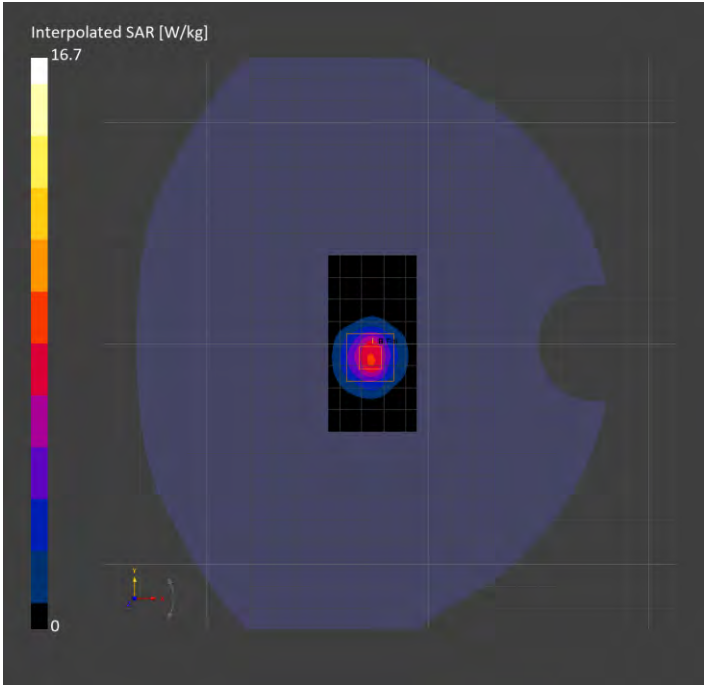

System Performance Check Report for D3900V2 - SN1115

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	40.0
Group UID	CW 0-	TSL Conductivity [S/m]	3.11
Conversion Factor	6.25	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7448 2026-02-17	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1380 2026-02-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		75.4
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.71	6.79
psSAR10g [W/Kg]	2.38	2.43
Power Drift [±0.2 dB]	N/A	0.00

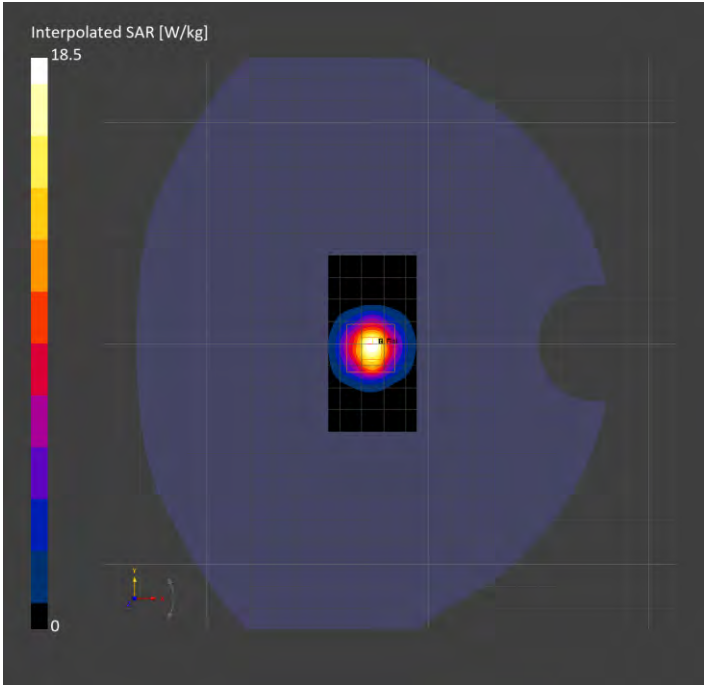

System Performance Check Report for D3700V2 - SN1131

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	40.7
Group UID	CW 0-	TSL Conductivity [S/m]	2.82
Conversion Factor	6.65	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3990 2026-02-17	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1545 2026-02-06	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		77.7
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.97	6.23
psSAR10g [W/Kg]	2.34	2.40
Power Drift [±0.2 dB]	N/A	0.03

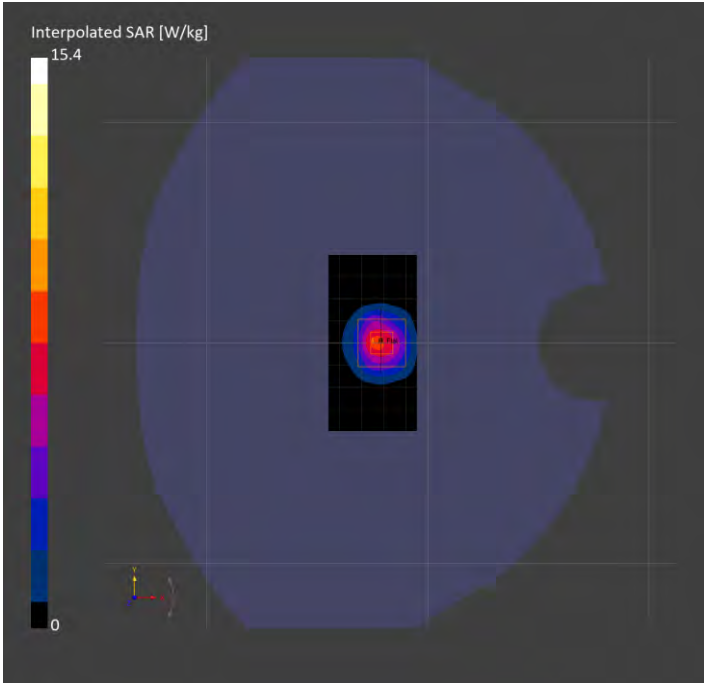

System Performance Check Report for D3500V2 - SN1011

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	41.5
Group UID	CW 0-	TSL Conductivity [S/m]	2.67
Conversion Factor	6.63	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3990 2026-02-17	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1545 2026-02-06	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		80.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.81	6.03
psSAR10g [W/Kg]	2.24	2.36
Power Drift [±0.2 dB]	N/A	-0.03

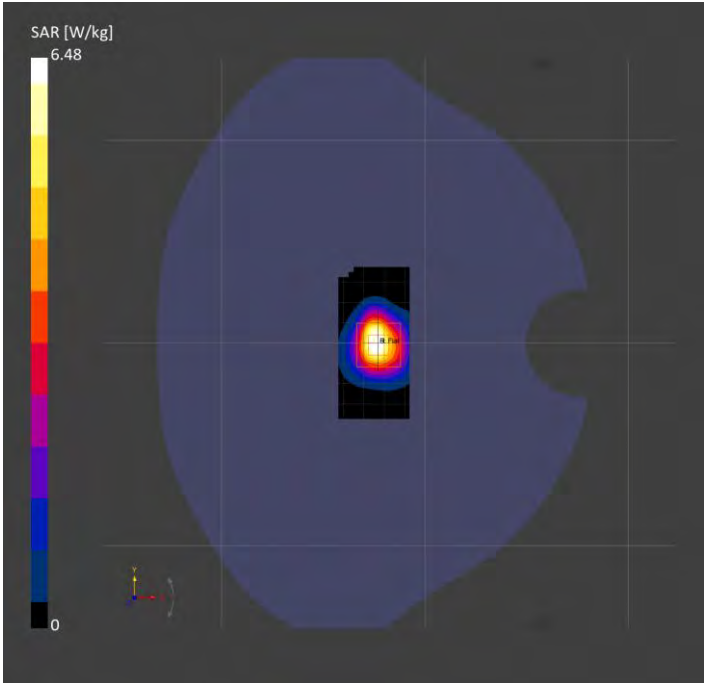

System Performance Check Report for D3700V2 - SN1039

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	41.1
Group UID	CW 0-	TSL Conductivity [S/m]	2.83
Conversion Factor	6.65	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3990 2026-02-17	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1545 2026-02-06	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		77.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.02	6.23
psSAR10g [W/Kg]	2.30	2.37
Power Drift [±0.2 dB]	N/A	0.02

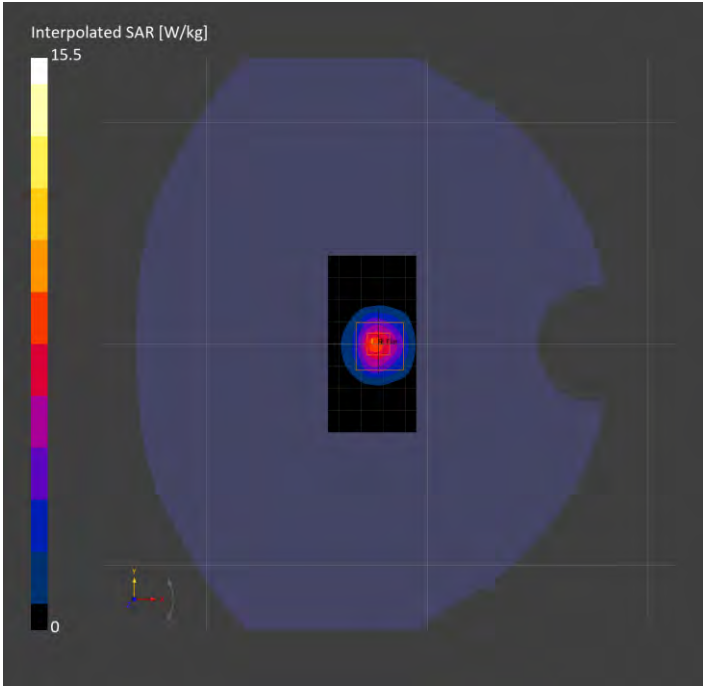

System Performance Check Report for D3500V2 - SN1060

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	41.1
Group UID	CW 0-	TSL Conductivity [S/m]	2.68
Conversion Factor	6.63	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3990 2026-02-17	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1545 2026-02-06	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		78.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.52	5.85
psSAR10g [W/Kg]	2.25	2.30
Power Drift [±0.2 dB]	N/A	-0.04

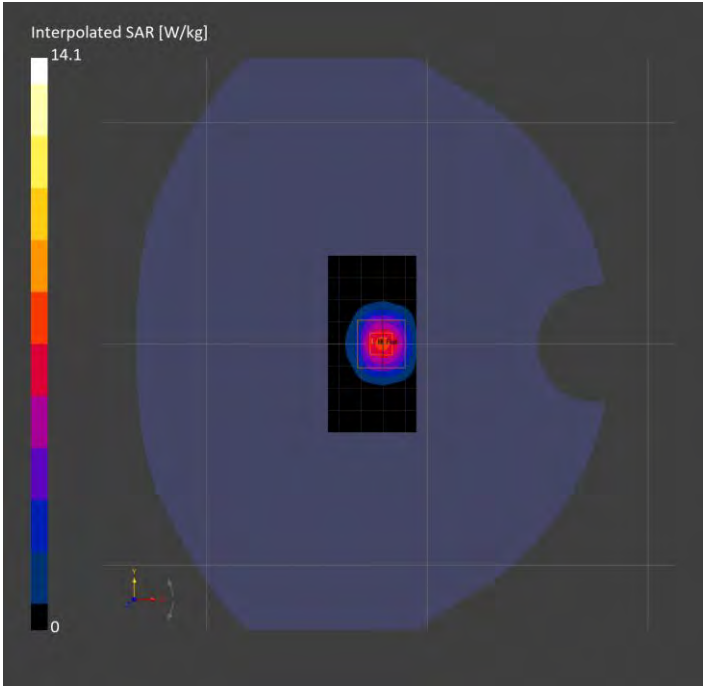

System Performance Check Report for D3900V2 - SN1115

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	40.6
Group UID	CW 0-	TSL Conductivity [S/m]	3.18
Conversion Factor	6.74	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3990 2026-02-17	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1545 2026-02-06	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		75.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.29	6.10
psSAR10g [W/Kg]	2.21	2.14
Power Drift [±0.2 dB]	N/A	-0.06

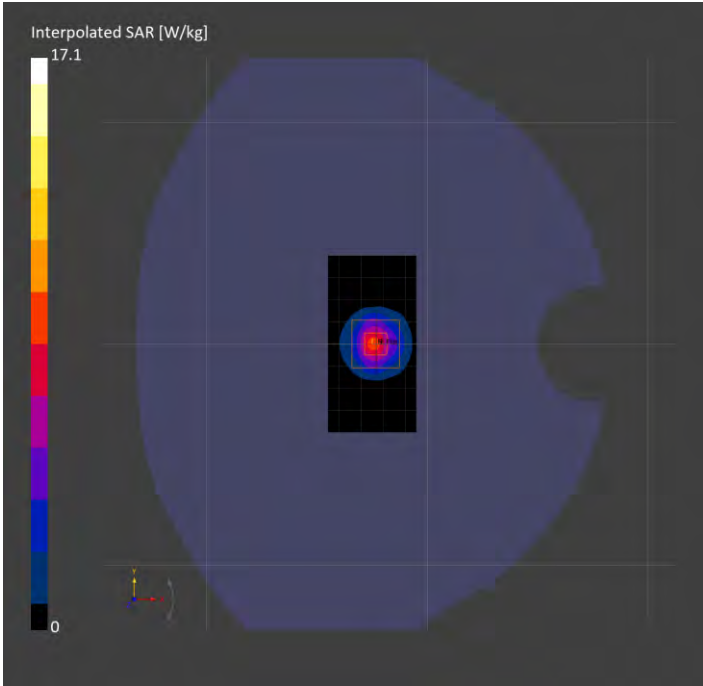

System Performance Check Report for D3900V2 - SN1102

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	39.9
Group UID	CW 0-	TSL Conductivity [S/m]	3.25
Conversion Factor	6.74	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3990 2026-02-17	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1545 2026-02-06	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		73.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.1

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.18	6.37
psSAR10g [W/Kg]	2.16	2.24
Power Drift [±0.2 dB]	N/A	-0.01

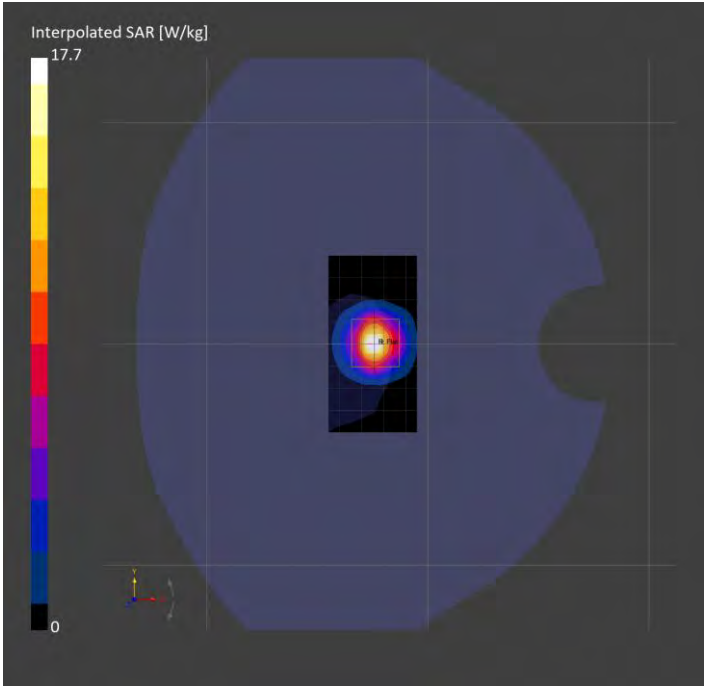

System Performance Check Report for D3500V2 - SN1060

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	40.1
Group UID	CW 0-	TSL Conductivity [S/m]	2.74
Conversion Factor	6.38	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7897 2025-10-14	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1377 2025-09-09	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		75.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.07	6.20
psSAR10g [W/Kg]	2.31	2.39
Power Drift [±0.2 dB]	N/A	0.03

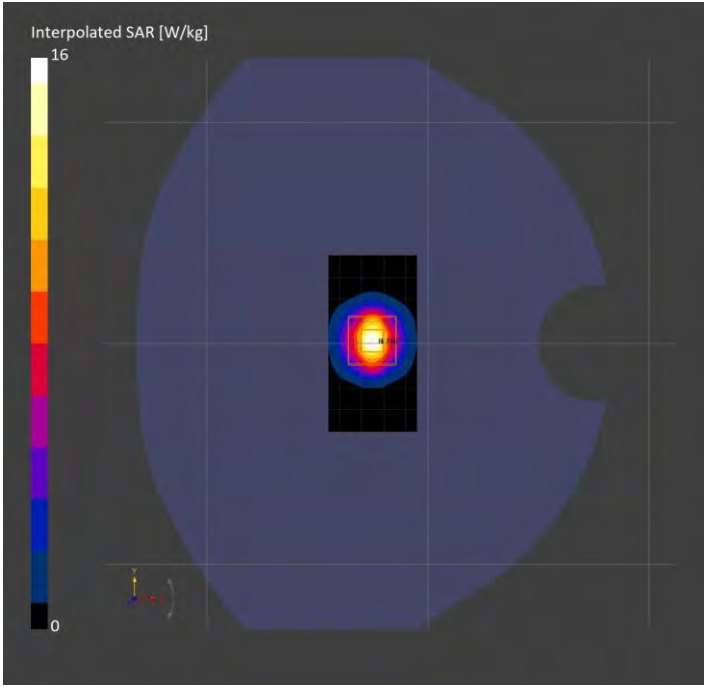

System Performance Check Report for D3900V2 - SN1102

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	40.7
Group UID	CW 0-	TSL Conductivity [S/m]	3.12
Conversion Factor	6.28	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7897 2025-10-14	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1377 2025-09-09	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		72.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.50	6.72
psSAR10g [W/Kg]	2.29	2.39
Power Drift [±0.2 dB]	N/A	0.01

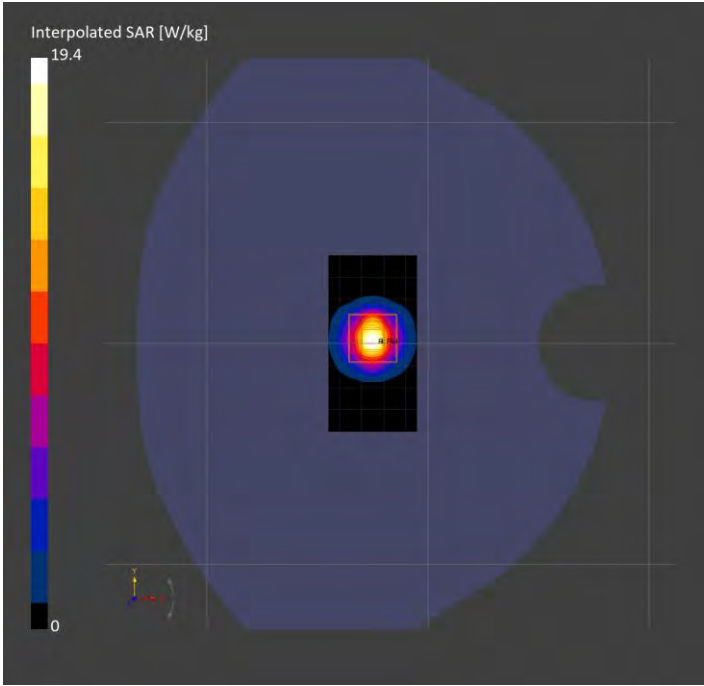

System Performance Check Report for D3700V2 - SN1131

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	39.6
Group UID	CW 0-	TSL Conductivity [S/m]	3.04
Conversion Factor	6.31	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7897 2025-10-14	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1377 2025-09-09	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		75.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.24	6.58
psSAR10g [W/Kg]	2.40	2.45
Power Drift [±0.2 dB]	N/A	0.00

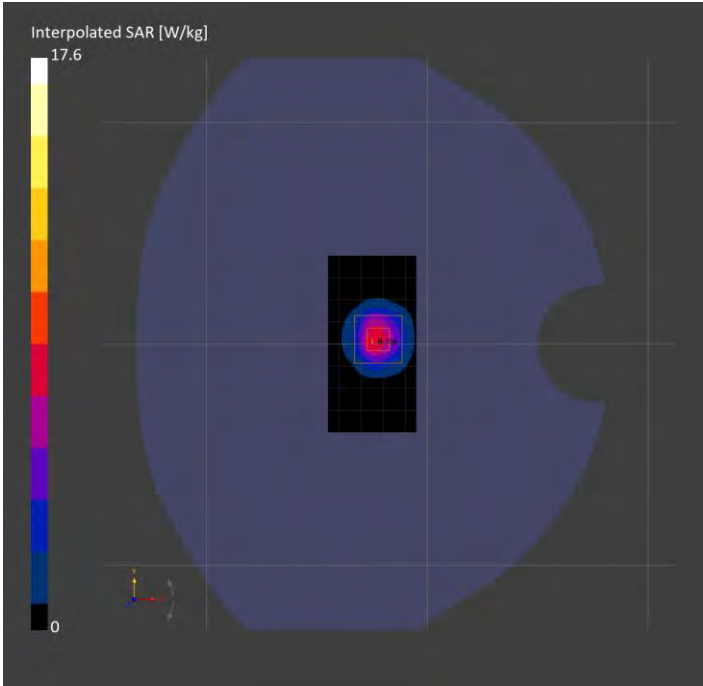

System Performance Check Report for D3500V2 - SN1182

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	39.0
Group UID	CW 0-	TSL Conductivity [S/m]	2.76
Conversion Factor	6.38	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7897 2025-10-14	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1377 2025-09-09	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		76.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.84	6.04
psSAR10g [W/Kg]	2.25	2.33
Power Drift [±0.2 dB]	N/A	-0.04

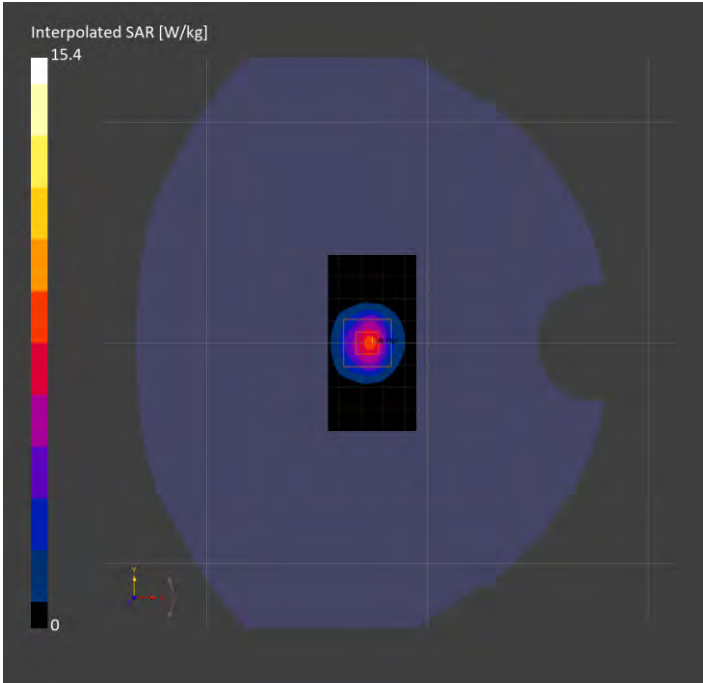

System Performance Check Report for D3700V2 - SN1039

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	41.2
Group UID	CW 0-	TSL Conductivity [S/m]	2.85
Conversion Factor	6.31	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7897 2025-10-14	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1377 2025-09-09	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		74.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.72	6.24
psSAR10g [W/Kg]	2.31	2.38
Power Drift [±0.2 dB]	N/A	0.00

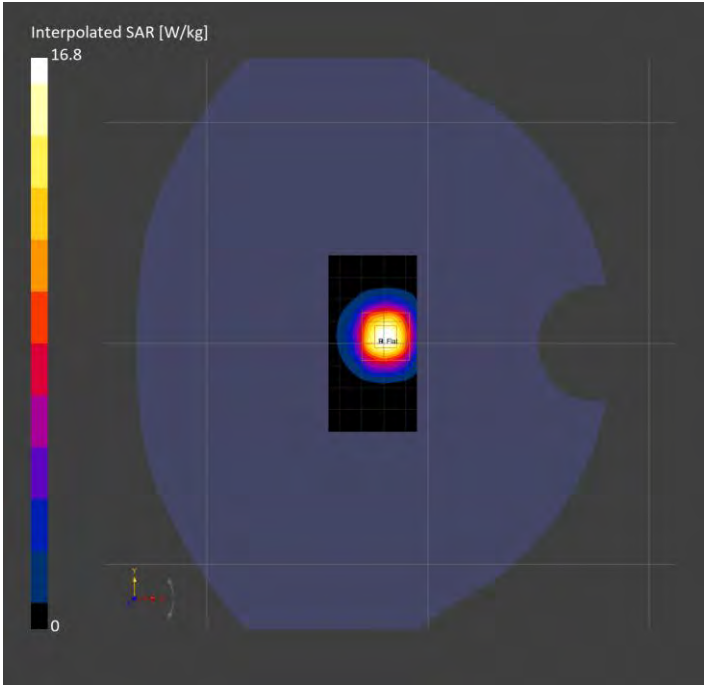

System Performance Check Report for D3500V2 - SN1011

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	41.2
Group UID	CW 0-	TSL Conductivity [S/m]	2.76
Conversion Factor	6.38	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7897 2025-10-14	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1377 2025-09-09	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		76.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.1

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.79	3.03
psSAR10g [W/Kg]	1.11	1.18
Power Drift [±0.2 dB]	N/A	-0.02

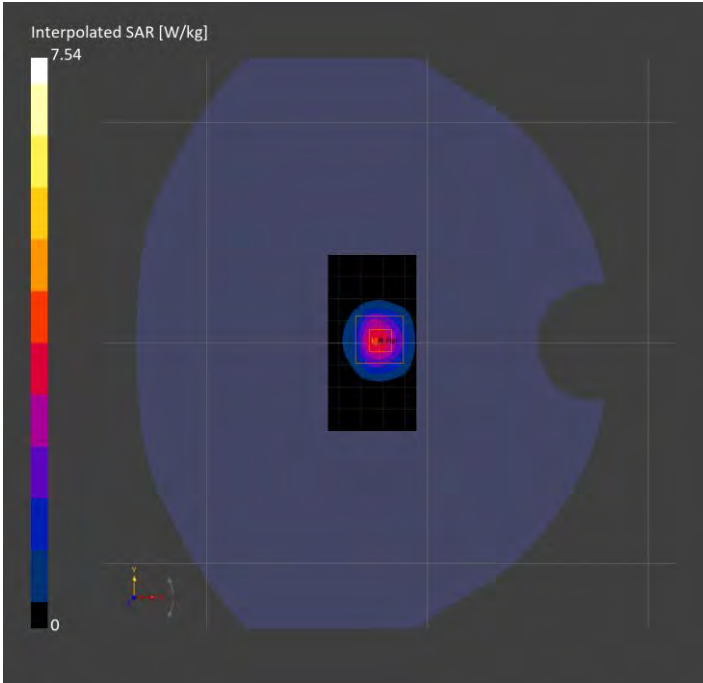

System Performance Check Report for D3900V2 - SN1115

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	40.6
Group UID	CW 0-	TSL Conductivity [S/m]	3.14
Conversion Factor	6.28	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7897 2025-10-14	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1377 2025-09-09	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		73.6
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.88	3.16
psSAR10g [W/Kg]	1.05	1.12
Power Drift [±0.2 dB]	N/A	-0.02

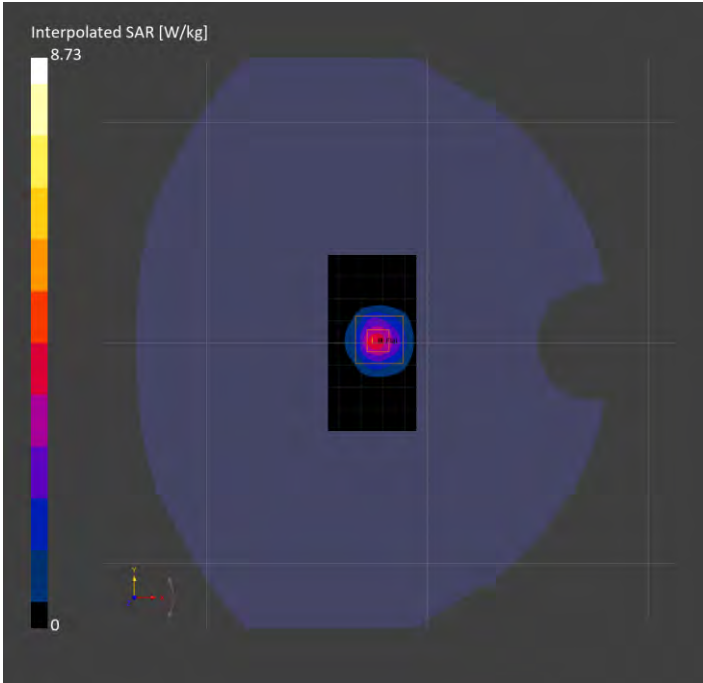

System Performance Check Report for D2300V2 - SN1002

Exposure Conditions

Frequency [MHz] Channel Number	2300.000 0	TSL Permittivity	37.2
Group UID	CW 0-	TSL Conductivity [S/m]	1.64
Conversion Factor	7.1	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7979 2026-03-03	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1943 2026-02-23	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		82.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.29	2.29
psSAR10g [W/Kg]	1.10	1.11
Power Drift [±0.2 dB]	-0.02	-0.03

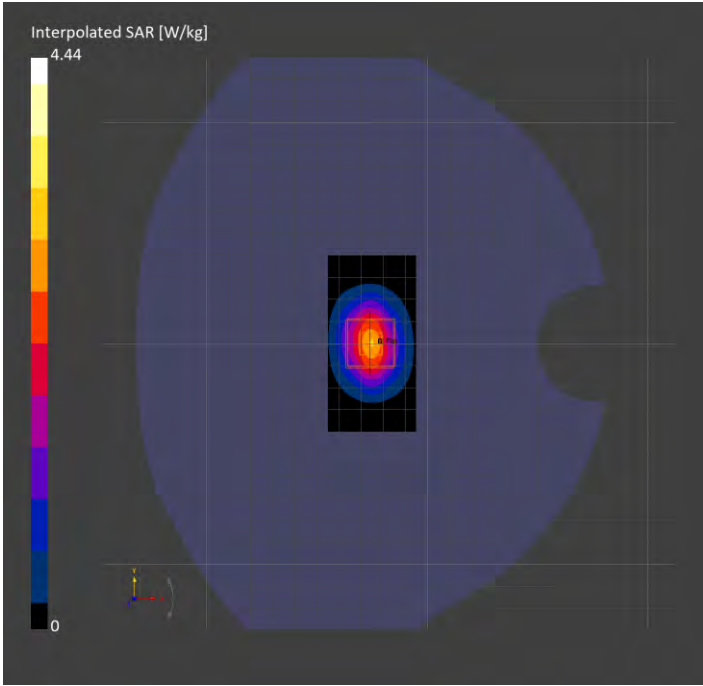

System Performance Check Report for D2600V2 - SN1006

Exposure Conditions

Frequency [MHz] Channel Number	2600.000 0	TSL Permittivity	37.3
Group UID	CW 0-	TSL Conductivity [S/m]	1.86
Conversion Factor	6.82	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7979 2026-03-03	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1943 2026-02-23	TSL Type	DAK 3.5 Head 23.26 deg.C 2026-Jun-01 04_44_55
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		80.7
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.52	2.58
psSAR10g [W/Kg]	1.15	1.18
Power Drift [±0.2 dB]	-0.05	0.04

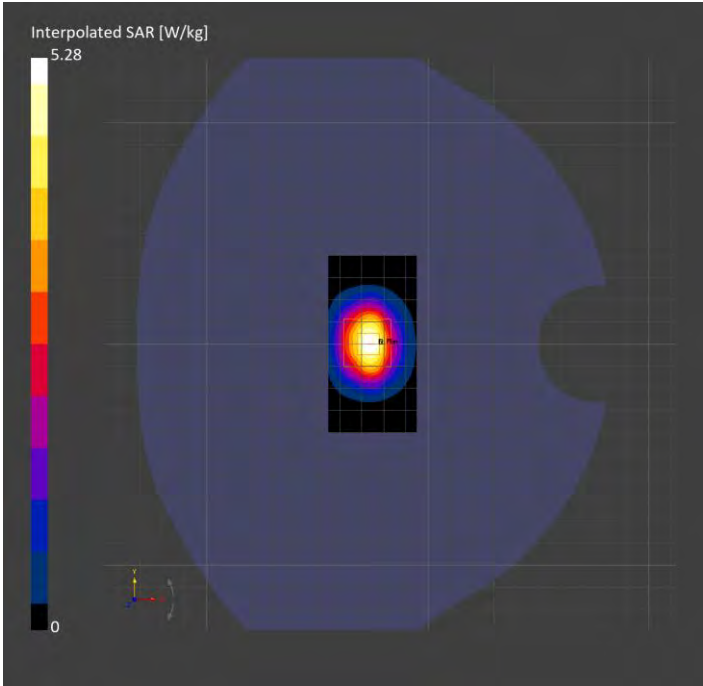

System Performance Check Report for D2600V2 - SN1036

Exposure Conditions

Frequency [MHz] Channel Number	2600.000 0	TSL Permittivity	38.0
Group UID	CW 0-	TSL Conductivity [S/m]	1.85
Conversion Factor	6.82	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7979 2026-03-03	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1943 2026-02-23	TSL Type	DAK 3.5 Head 23.31 deg.C 2026-Jun-08 21_59_27
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		80.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.52	2.67
psSAR10g [W/Kg]	1.20	1.24
Power Drift [±0.2 dB]	-0.01	0.01

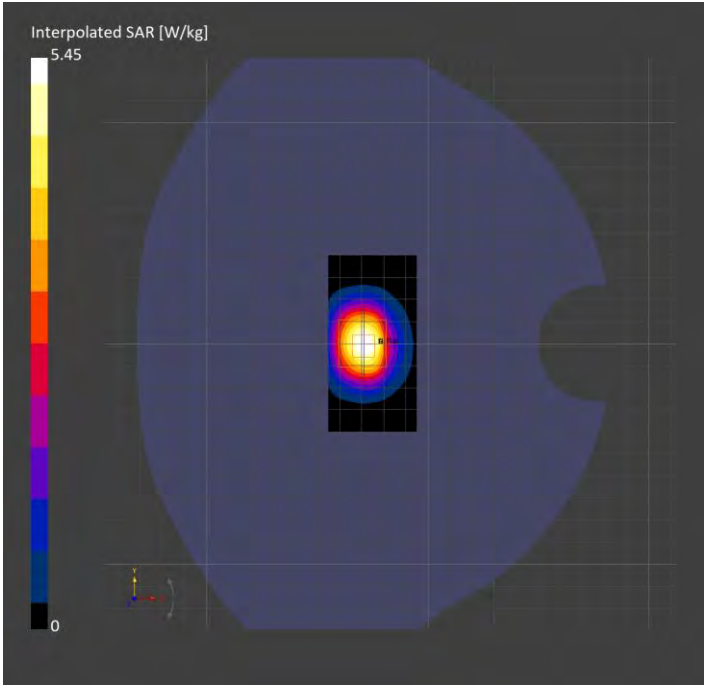

System Performance Check Report for D2600V2 - SN1006

Exposure Conditions

Frequency [MHz] Channel Number	2600.000 0	TSL Permittivity	40.4
Group UID	CW 0-	TSL Conductivity [S/m]	1.98
Conversion Factor	7.04	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7981 2026-03-17	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1944 2026-03-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		80.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.54	2.56
psSAR10g [W/Kg]	1.12	1.16
Power Drift [±0.2 dB]	-0.02	-0.06

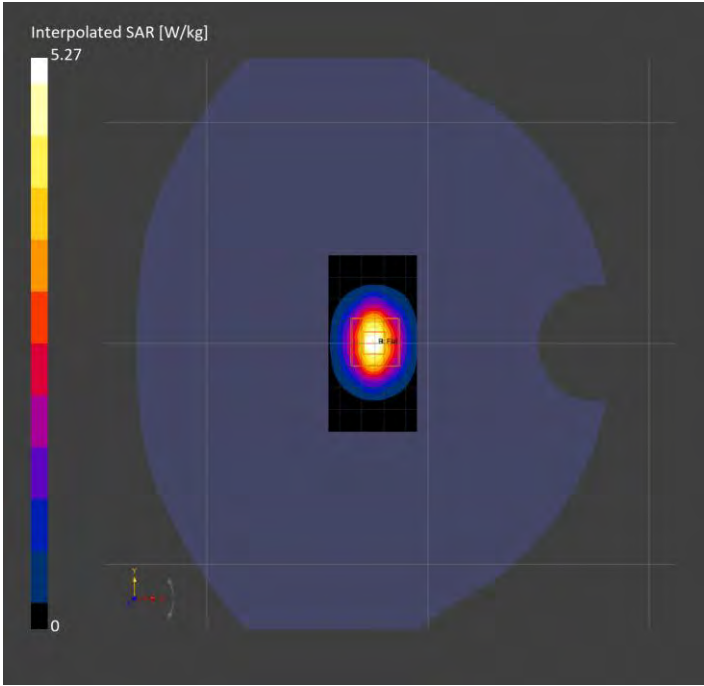

System Performance Check Report for D2300V2 - SN1160

Exposure Conditions

Frequency [MHz] Channel Number	2300.000 0	TSL Permittivity	41.4
Group UID	CW 0-	TSL Conductivity [S/m]	1.77
Conversion Factor	7.24	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7981 2026-03-17	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1944 2026-03-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		81.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.1

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.49	2.51
psSAR10g [W/Kg]	1.19	1.22
Power Drift [±0.2 dB]	-0.01	0.01

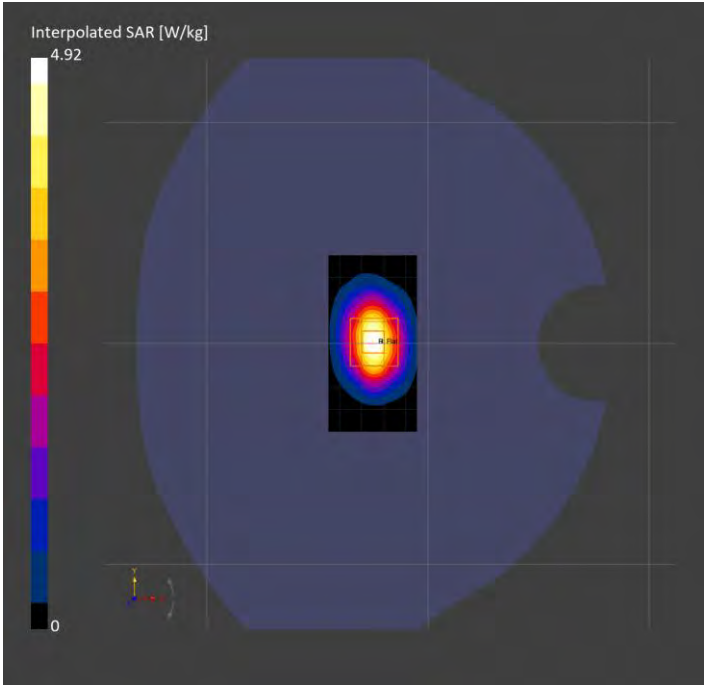

System Performance Check Report for D2300V2 - SN1002

Exposure Conditions

Frequency [MHz] Channel Number	2300.000 0	TSL Permittivity	39.3
Group UID	CW 0-	TSL Conductivity [S/m]	1.67
Conversion Factor	7.24	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7981 2026-03-17	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1944 2026-03-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		78.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.53	2.46
psSAR10g [W/Kg]	1.20	1.18
Power Drift [±0.2 dB]	-0.26	-0.19

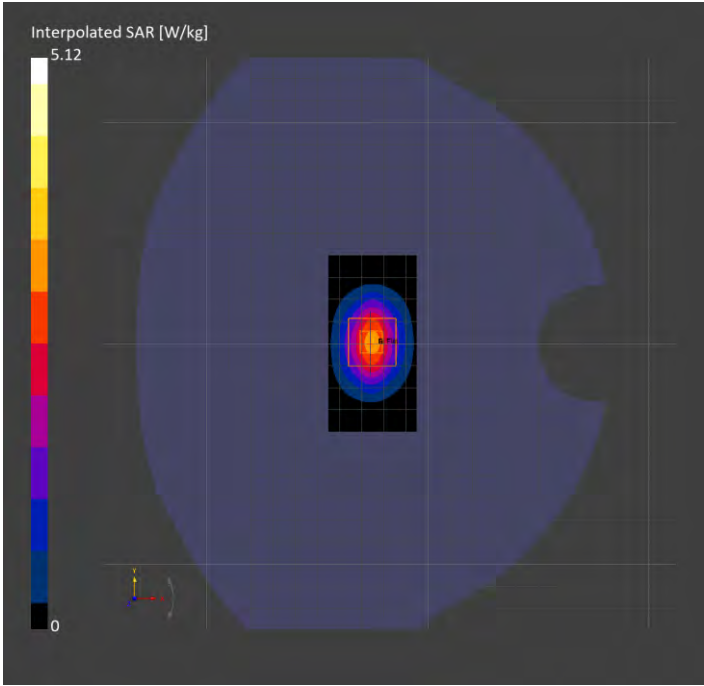

System Performance Check Report for D2300V2 - SN1058

Exposure Conditions

Frequency [MHz] Channel Number	2300.000 0	TSL Permittivity	36.9
Group UID	CW 0-	TSL Conductivity [S/m]	1.64
Conversion Factor	7.24	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7981 2026-03-17	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1944 2026-03-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		76.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.49	2.60
psSAR10g [W/Kg]	1.17	1.24
Power Drift [±0.2 dB]	-0.04	0.00

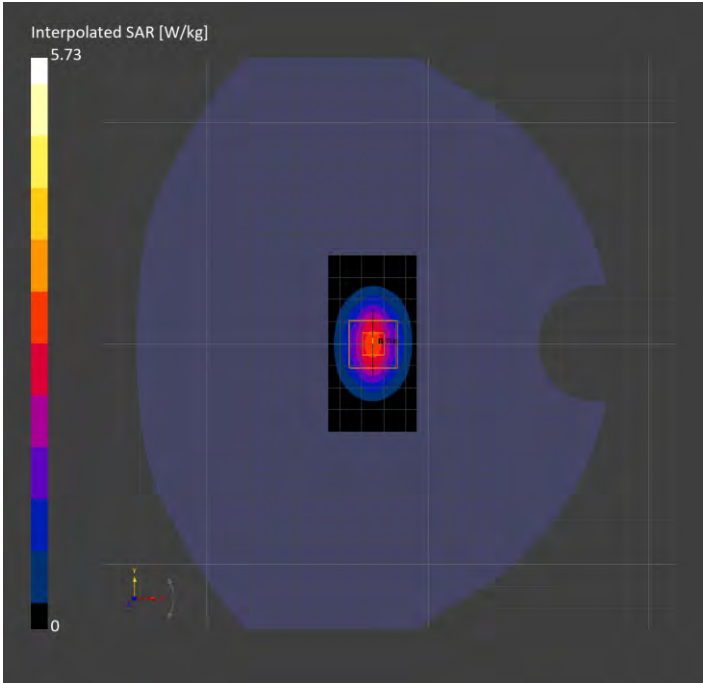

System Performance Check Report for D2600V2 - SN1036

Exposure Conditions

Frequency [MHz] Channel Number	2600.000 0	TSL Permittivity	39.1
Group UID	CW 0-	TSL Conductivity [S/m]	1.90
Conversion Factor	7.04	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7981 2026-03-17	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1944 2026-03-05	TSL Type	DAKS 3.5 Head 23.48 deg.C 2026-Jun-04 13_26_20
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		80.0
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.1

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.89	5.94
psSAR10g [W/Kg]	2.66	2.73
Power Drift [±0.2 dB]	0.02	-0.01

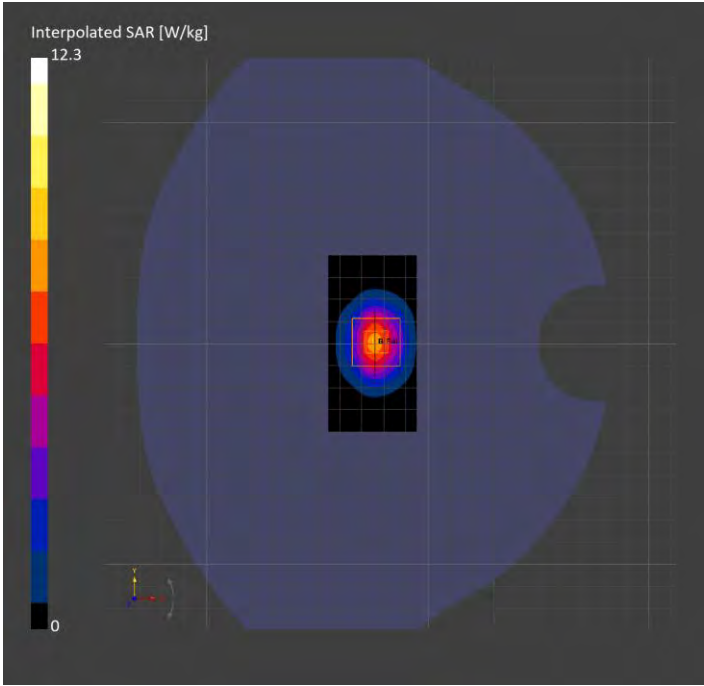

System Performance Check Report for D3500V2 - SN1011

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	39.2
Group UID	CW 0-	TSL Conductivity [S/m]	2.74
Conversion Factor	6.38	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7983 2026-03-24	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1947 2026-03-23	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		76.0
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.05	6.20
psSAR10g [W/Kg]	2.31	2.41
Power Drift [±0.2 dB]	0.00	0.01

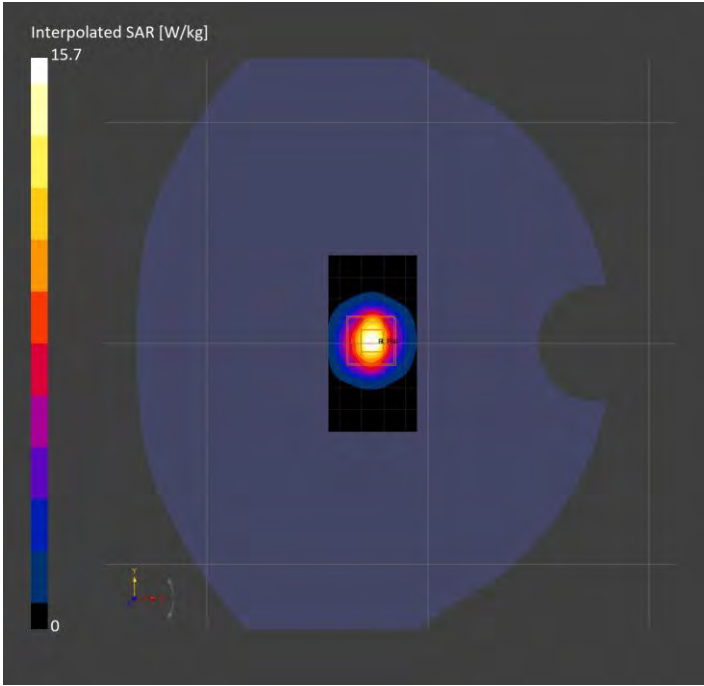

System Performance Check Report for D3700V2 - SN1039

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	38.9
Group UID	CW 0-	TSL Conductivity [S/m]	2.92
Conversion Factor	6.34	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7983 2026-03-24	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1947 2026-03-23	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		74.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.16	6.36
psSAR10g [W/Kg]	2.30	2.38
Power Drift [±0.2 dB]	-0.00	0.00

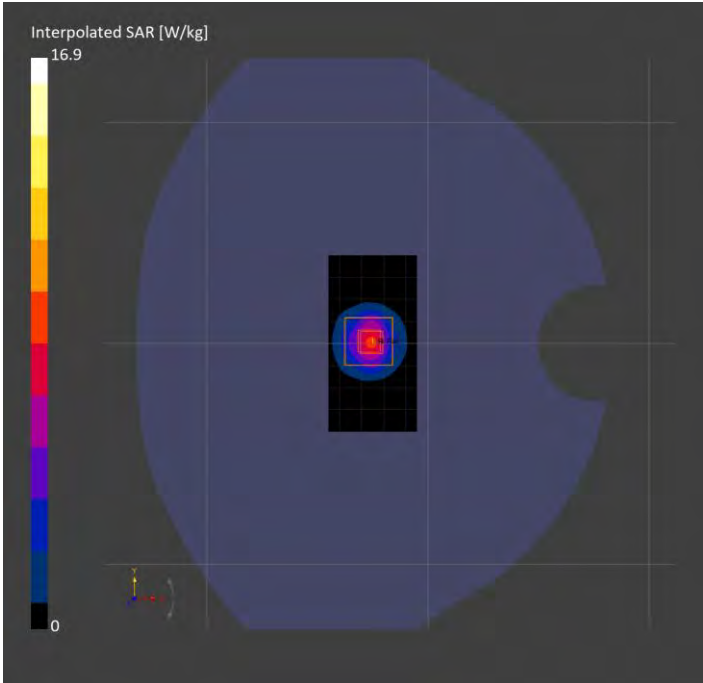

System Performance Check Report for D3500V2 - SN1060

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	38.8
Group UID	CW 0-	TSL Conductivity [S/m]	2.82
Conversion Factor	6.38	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7983 2026-03-24	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1947 2026-03-23	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		75.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.96	6.13
psSAR10g [W/Kg]	2.29	2.35
Power Drift [±0.2 dB]	0.01	-0.01

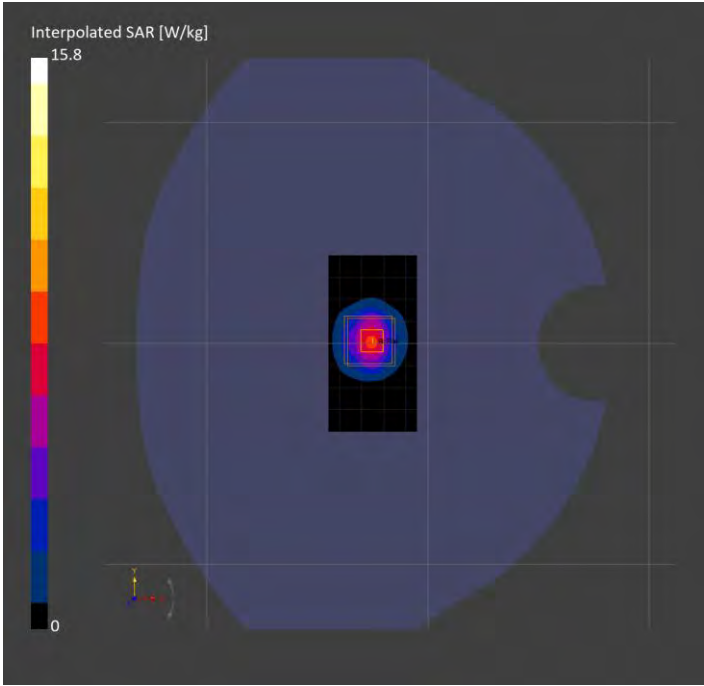

System Performance Check Report for D3700V2 - SN1131

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	38.4
Group UID	CW 0-	TSL Conductivity [S/m]	3.01
Conversion Factor	6.34	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7983 2026-03-24	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1947 2026-03-23	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		74.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.18	6.30
psSAR10g [W/Kg]	2.30	2.37
Power Drift [±0.2 dB]	0.00	-0.01

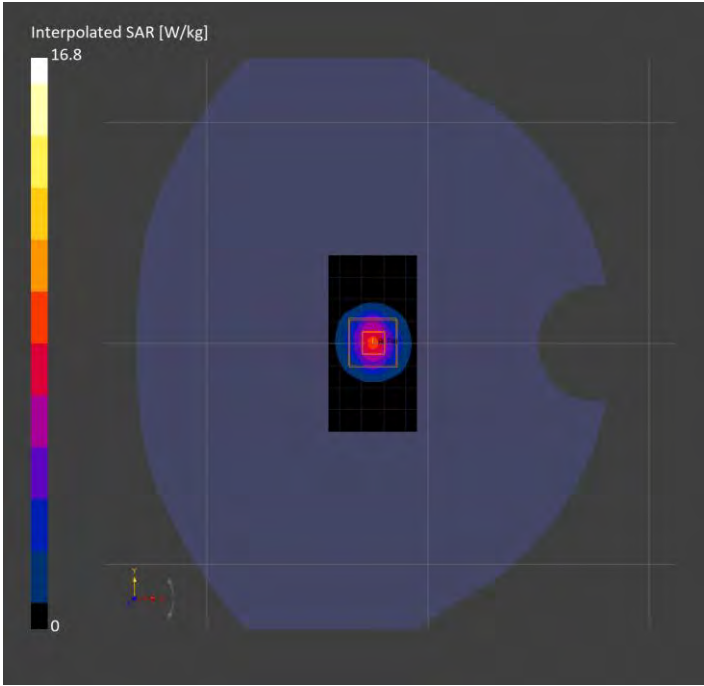

System Performance Check Report for D3900V2 - SN1115

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	38.1
Group UID	CW 0-	TSL Conductivity [S/m]	3.22
Conversion Factor	6.31	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7983 2026-03-24	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1947 2026-03-23	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		72.0
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.90	6.13
psSAR10g [W/Kg]	2.08	2.16
Power Drift [±0.2 dB]	-0.10	-0.05

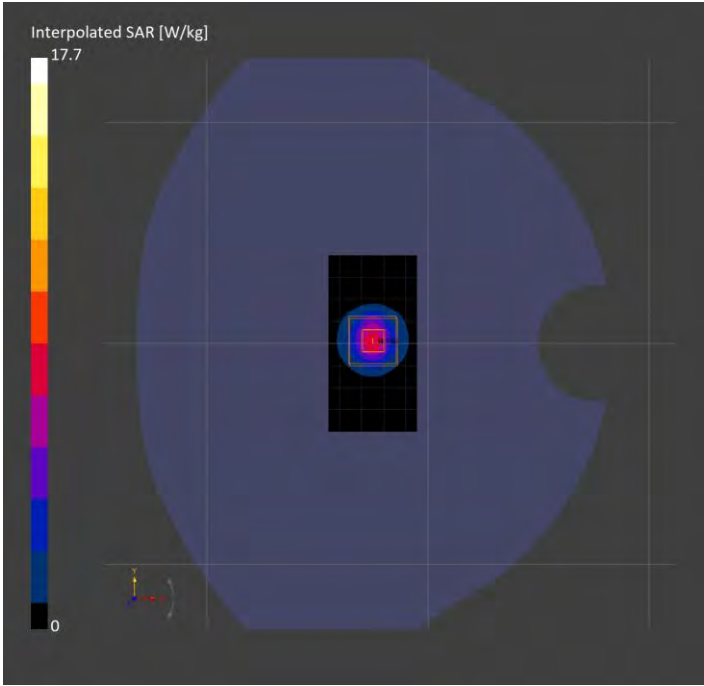

System Performance Check Report for D3500V2 - SN1182

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	38.8
Group UID	CW 0-	TSL Conductivity [S/m]	2.89
Conversion Factor	6.38	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7983 2026-03-24	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1947 2026-03-23	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		75.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.1

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.16	3.24
psSAR10g [W/Kg]	1.22	1.25
Power Drift [±0.2 dB]	-0.06	-0.00

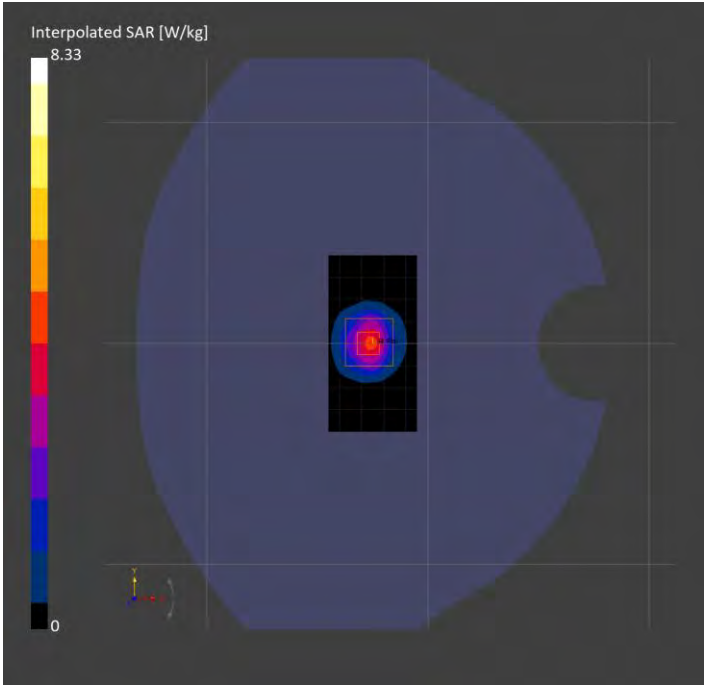

System Performance Check Report for D3900V2 - SN1102

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	38.6
Group UID	CW 0-	TSL Conductivity [S/m]	3.12
Conversion Factor	6.31	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7983 2026-03-24	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1947 2026-03-23	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		72.0
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.12	3.29
psSAR10g [W/Kg]	1.10	1.17
Power Drift [±0.2 dB]	-0.08	-0.03

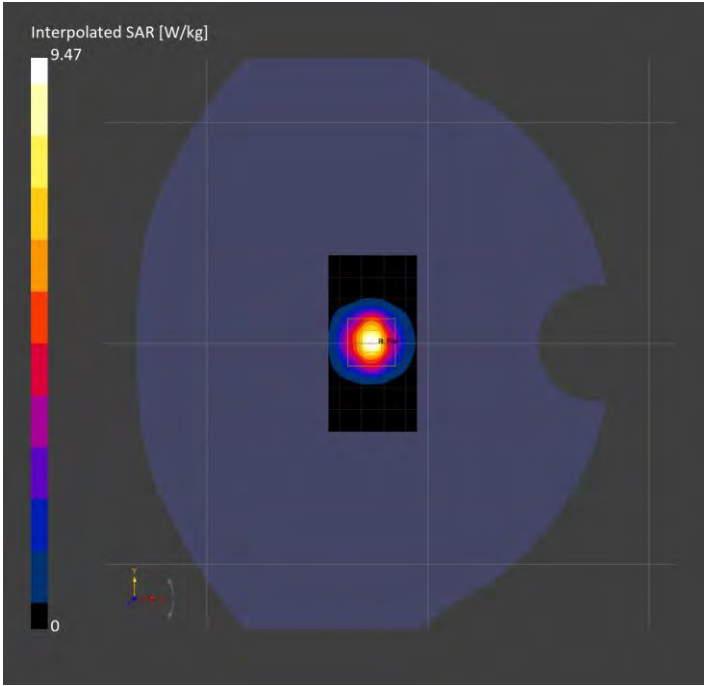

System Performance Check Report for D3700V2 - SN1131

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	38.7
Group UID	CW 0-	TSL Conductivity [S/m]	3.13
Conversion Factor	6.5	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7977 2026-03-02	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1942 2026-02-23	TSL Type	DAK 3.5 Head 19.43 deg.C 2026-May-18 17_31_54
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		73.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.1

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.34	3.51
psSAR10g [W/Kg]	1.27	1.31
Power Drift [±0.2 dB]	-0.00	-0.01

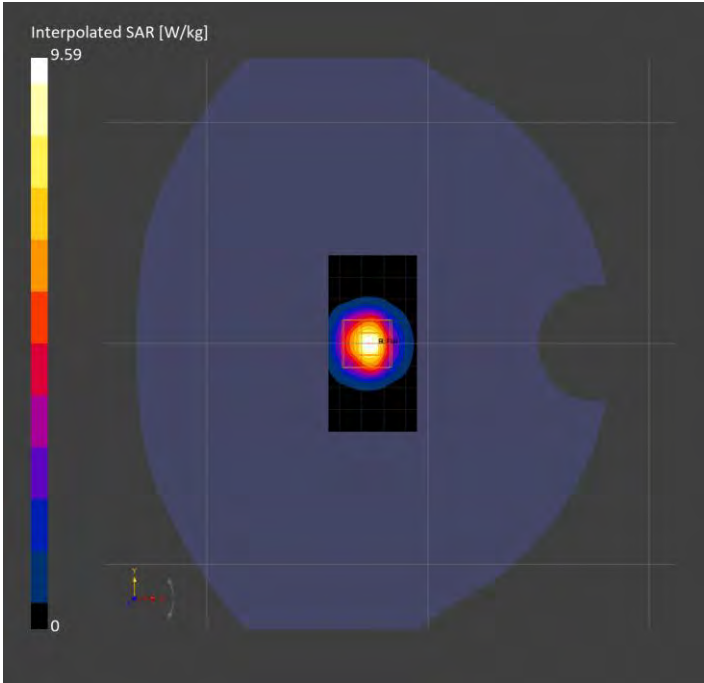

System Performance Check Report for D3500V2 - SN1011

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	39.6
Group UID	CW 0-	TSL Conductivity [S/m]	2.75
Conversion Factor	6.57	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7977 2026-03-02	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1942 2026-02-23	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		75.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.1

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.37	6.26
psSAR10g [W/Kg]	2.09	2.42
Power Drift [±0.2 dB]	0.44	-0.06

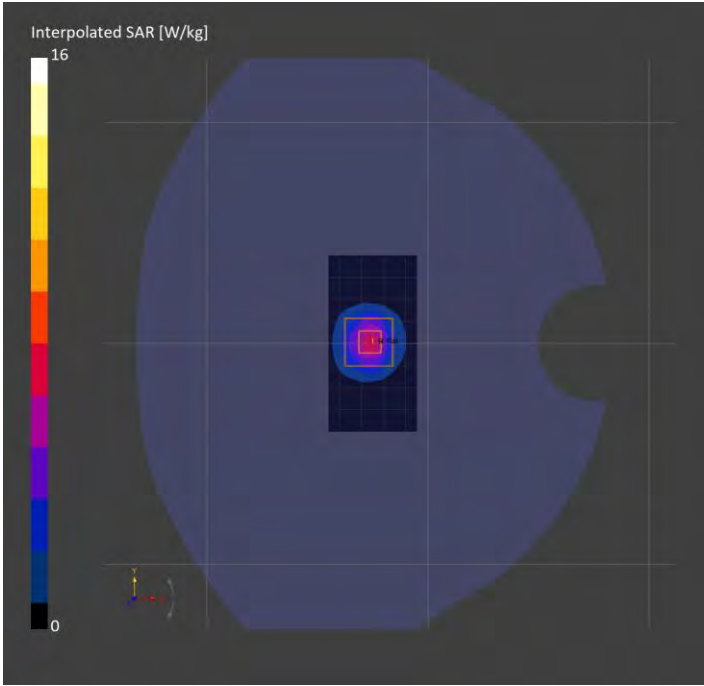

System Performance Check Report for D3500V2 - SN1060

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	38.6
Group UID	CW 0-	TSL Conductivity [S/m]	2.71
Conversion Factor	6.57	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7977 2026-03-02	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1942 2026-02-23	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		75.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.1

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.99	3.09
psSAR10g [W/Kg]	1.13	1.19
Power Drift [±0.2 dB]	-0.07	-0.05

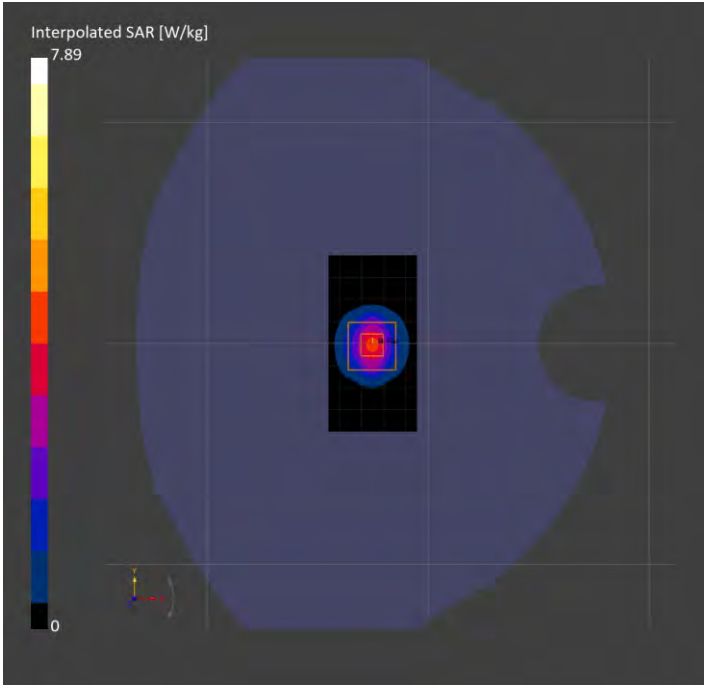

System Performance Check Report for D3700V2 - SN1039

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	38.4
Group UID	CW 0-	TSL Conductivity [S/m]	2.90
Conversion Factor	6.5	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7977 2026-03-02	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1942 2026-02-23	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		73.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.1

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.02	3.16
psSAR10g [W/Kg]	1.11	1.18
Power Drift [±0.2 dB]	-0.07	-0.06

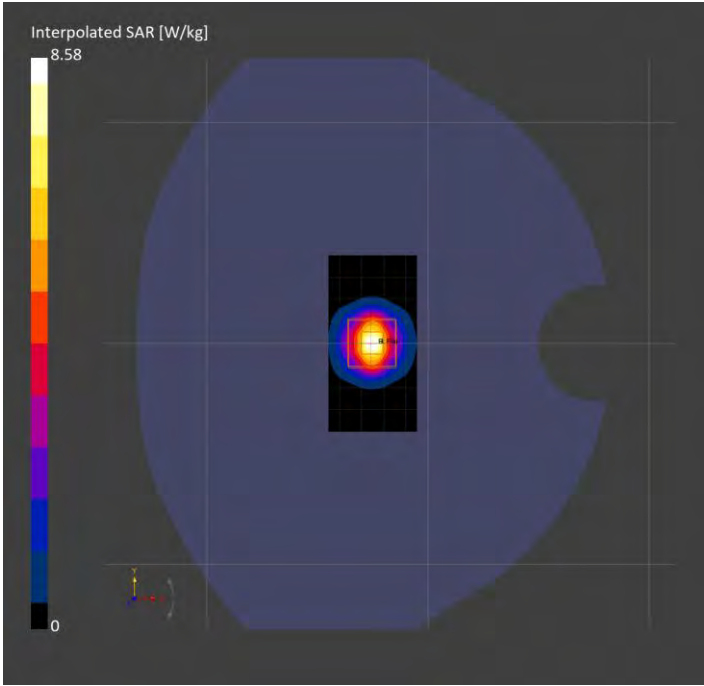

System Performance Check Report for D3900V2 - SN1102

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	38.1
Group UID	CW 0-	TSL Conductivity [S/m]	3.11
Conversion Factor	6.44	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7977 2026-03-02	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1942 2026-02-23	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		71.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.1

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.08	3.23
psSAR10g [W/Kg]	1.08	1.15
Power Drift [±0.2 dB]	-0.05	-0.05

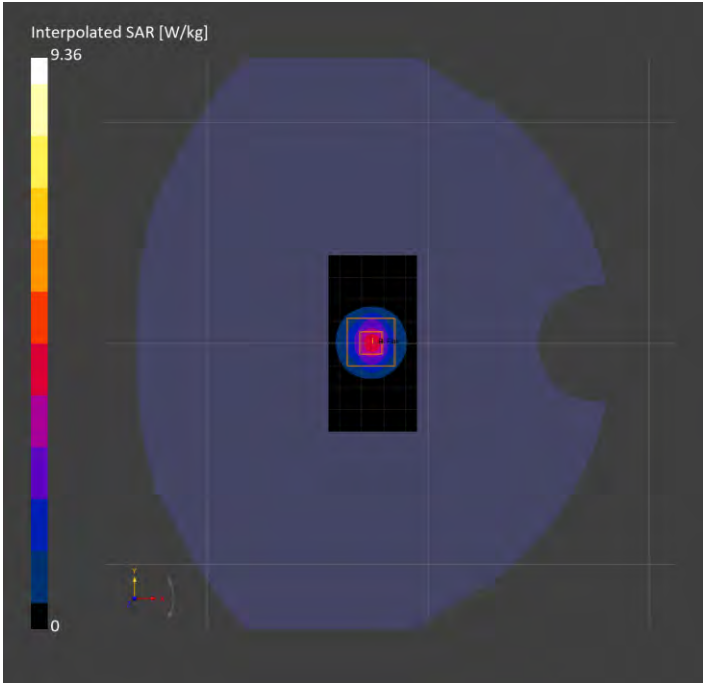

System Performance Check Report for D3500V2 - SN1011

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	40.6
Group UID	CW 0-	TSL Conductivity [S/m]	2.79
Conversion Factor	6.22	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7982 2026-03-24	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1945 2026-03-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		76.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.08	6.25
psSAR10g [W/Kg]	2.33	2.42
Power Drift [±0.2 dB]	-0.00	-0.00

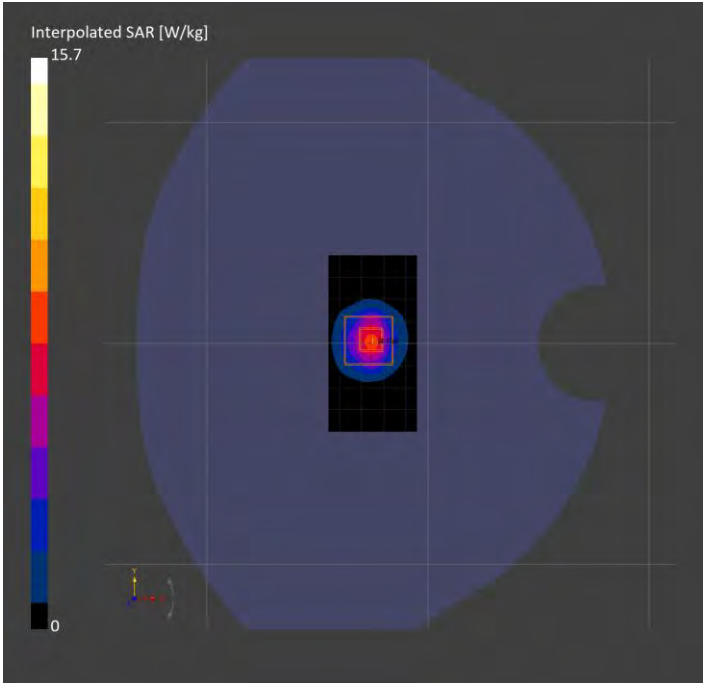

System Performance Check Report for D3900V2 - SN1102

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	39.7
Group UID	CW 0-	TSL Conductivity [S/m]	3.08
Conversion Factor	6.12	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7982 2026-03-24	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1945 2026-03-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		73.4
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.22	6.52
psSAR10g [W/Kg]	2.21	2.32
Power Drift [±0.2 dB]	-0.01	0.00

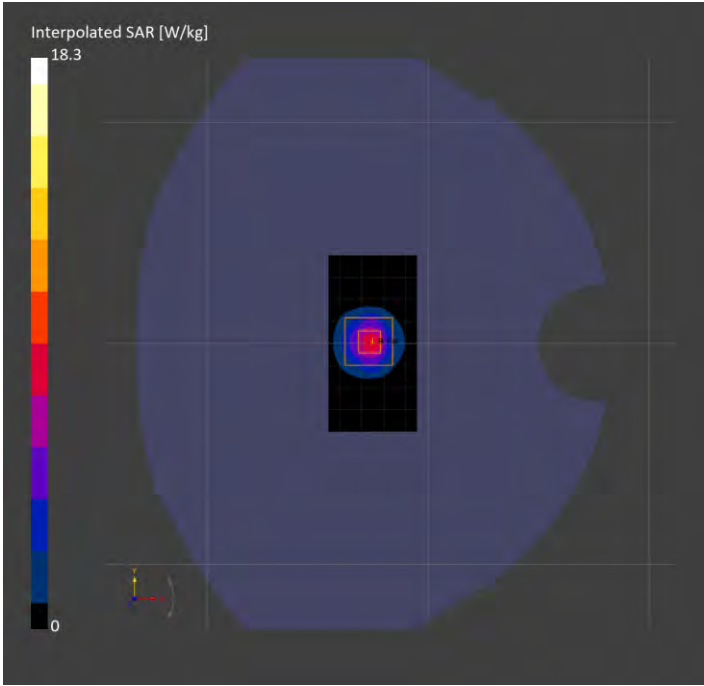

System Performance Check Report for D3500V2 - SN1060

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	38.4
Group UID	CW 0-	TSL Conductivity [S/m]	2.79
Conversion Factor	6.22	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7982 2026-03-24	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1945 2026-03-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		75.4
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.77	5.83
psSAR10g [W/Kg]	2.21	2.26
Power Drift [±0.2 dB]	-0.05	0.00

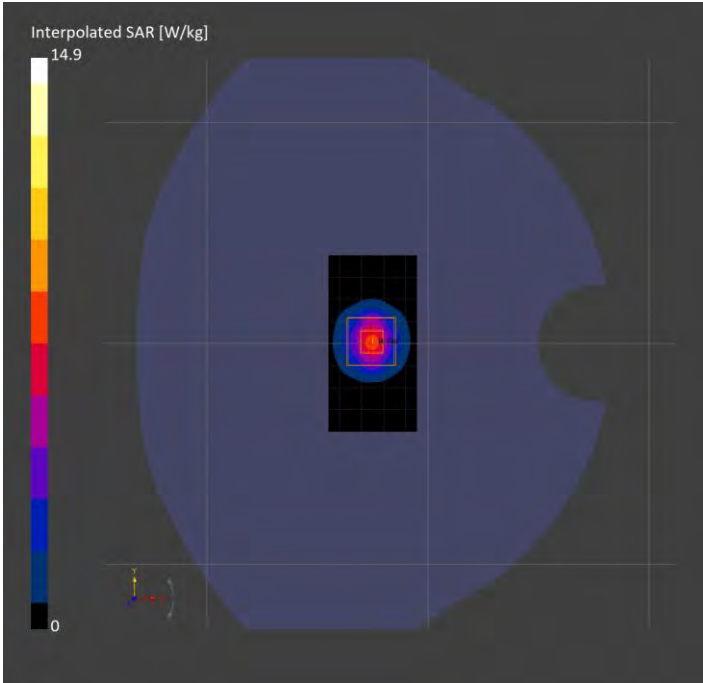

System Performance Check Report for D3700V2 - SN1039

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	38.0
Group UID	CW 0-	TSL Conductivity [S/m]	2.99
Conversion Factor	6.17	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7982 2026-03-24	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1945 2026-03-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		74.0
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.19	6.39
psSAR10g [W/Kg]	2.31	2.38
Power Drift [±0.2 dB]	0.00	0.00

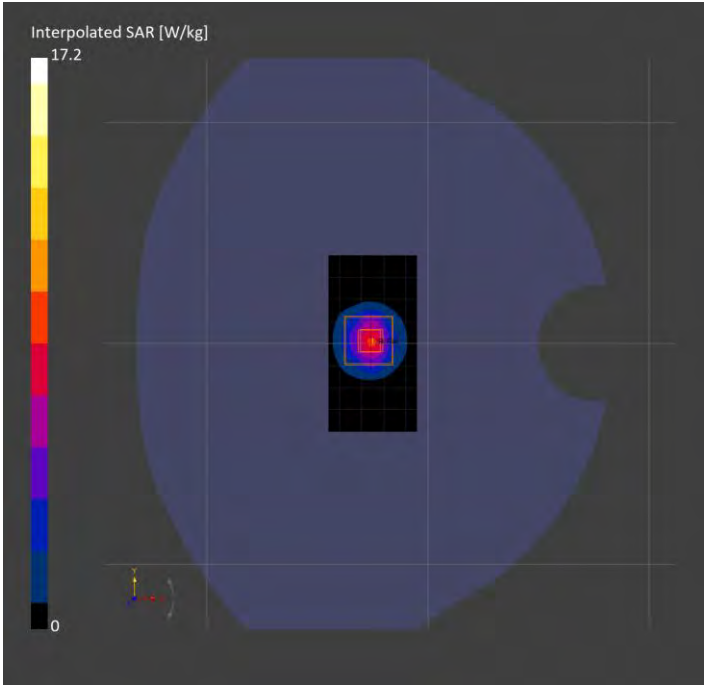

System Performance Check Report for D3500V2 - SN1011

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	40.6
Group UID	CW 0-	TSL Conductivity [S/m]	2.75
Conversion Factor	6.84	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7710 2026-01-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1674 2026-04-27	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		77.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.98	3.02
psSAR10g [W/Kg]	1.17	1.21
Power Drift [±0.2 dB]	N/A	-0.00

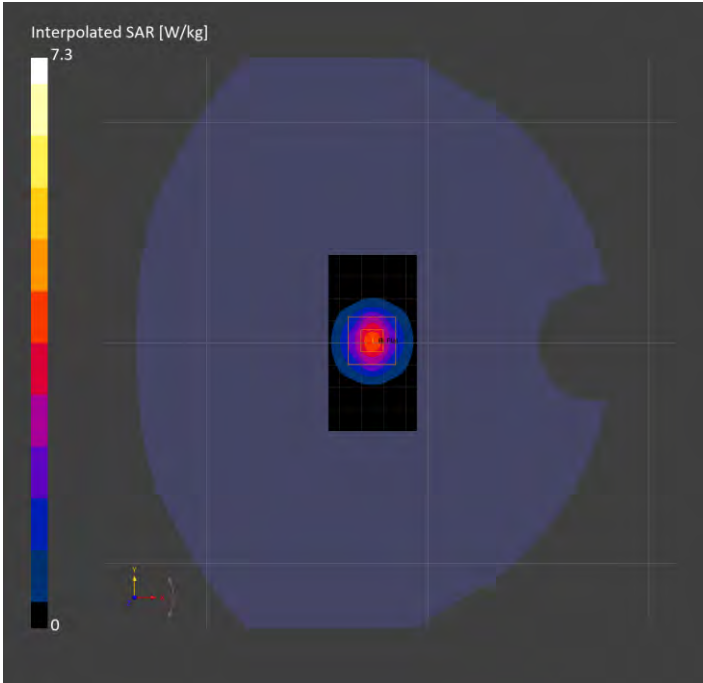

System Performance Check Report for D3900V2 - SN1102

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	39.9
Group UID	CW 0-	TSL Conductivity [S/m]	3.17
Conversion Factor	6.78	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7710 2026-01-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1674 2026-04-27	TSL Type	DAK 3.5 Head 20.56 deg.C 2026-May-29 01_58_36
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		75.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.13	6.43
psSAR10g [W/Kg]	2.14	2.29
Power Drift [±0.2 dB]	N/A	-0.09

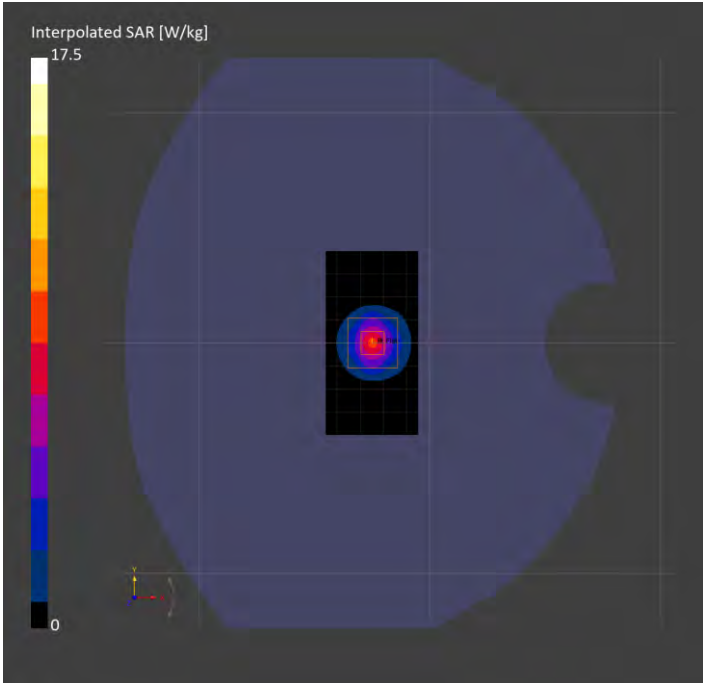

System Performance Check Report for D3700V2 - SN1039

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	41.3
Group UID	CW 0-	TSL Conductivity [S/m]	2.86
Conversion Factor	6.92	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7710 2026-01-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1674 2026-04-27	TSL Type	DAK 3.5 Head 23.49 deg.C 2026-Jun-02 15_55_12
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		76.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.43	6.42
psSAR10g [W/Kg]	2.39	2.45
Power Drift [±0.2 dB]	N/A	0.00

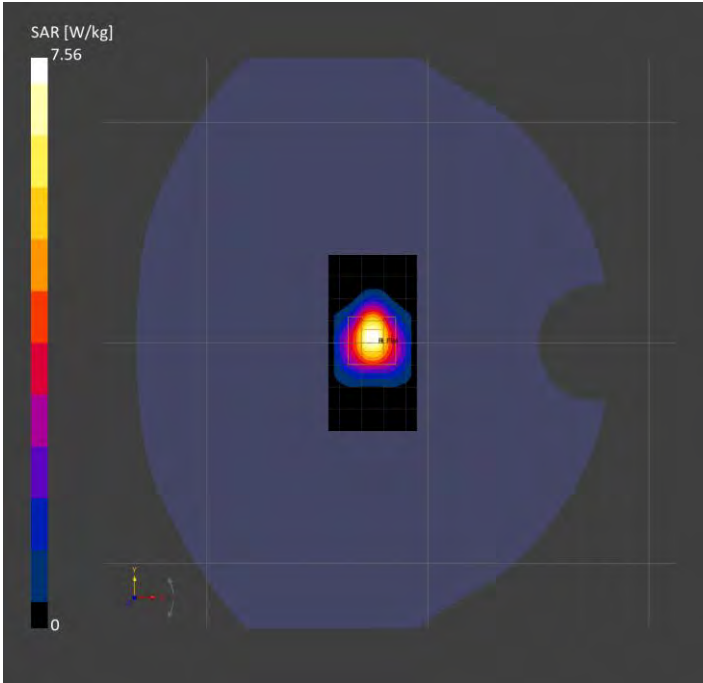

System Performance Check Report for D3900V2 - SN1115

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	41.2
Group UID	CW 0-	TSL Conductivity [S/m]	3.13
Conversion Factor	6.78	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7710 2026-01-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1674 2026-04-27	TSL Type	DAK 3.5 Head 23.49 deg.C 2026-Jun-02 15_55_12
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		77.6
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.78	5.95
psSAR10g [W/Kg]	2.06	2.23
Power Drift [±0.2 dB]	N/A	0.01

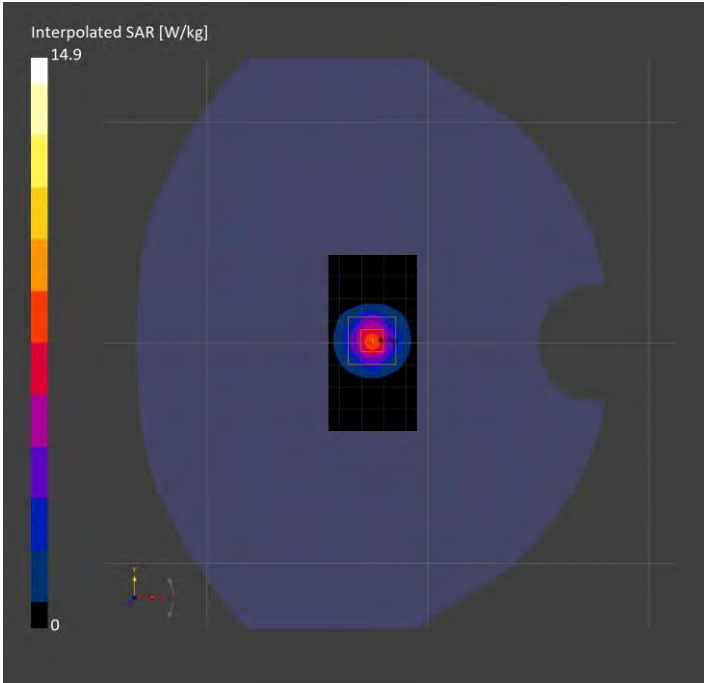

System Performance Check Report for D3500V2 - SN1060

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	41.1
Group UID	CW 0-	TSL Conductivity [S/m]	2.73
Conversion Factor	6.84	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7710 2026-01-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1674 2026-04-27	TSL Type	DAKS 3.5 Head 22.98 deg.C 2026-Jun-05 08_24_37
Software Version	17.0.4.6775		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		78.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.82	5.87
psSAR10g [W/Kg]	2.28	2.35
Power Drift [±0.2 dB]	N/A	0.01

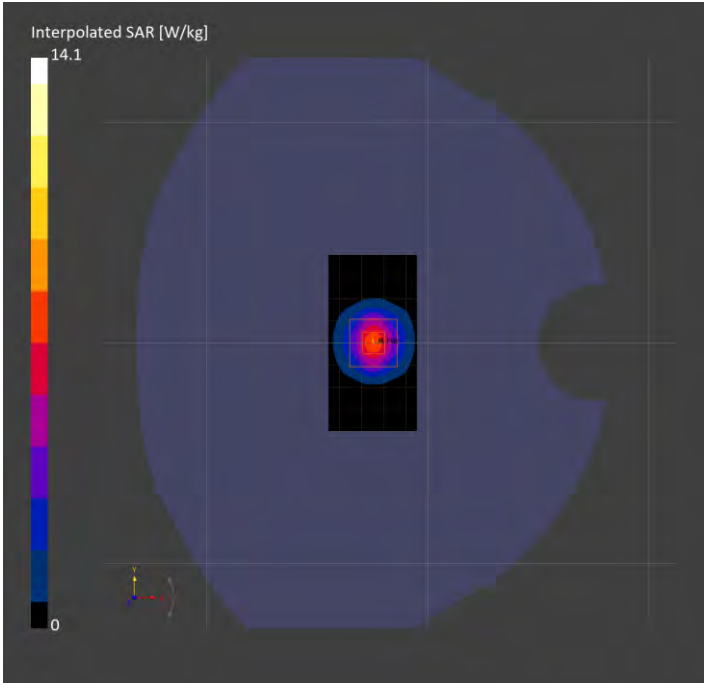

System Performance Check Report for D2600V2 - SN1036

Exposure Conditions

Frequency [MHz] Channel Number	2600.000 0	TSL Permittivity	40.7
Group UID	CW 0-	TSL Conductivity [S/m]	1.97
Conversion Factor	6.91	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7947 2025-09-10	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1798 2026-04-27	TSL Type	DAK 3.5 Head 21.24 deg.C 2026-May-25 09_54_19
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		80.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.69	2.69
psSAR10g [W/Kg]	1.21	1.22
Power Drift [±0.2 dB]	N/A	0.00

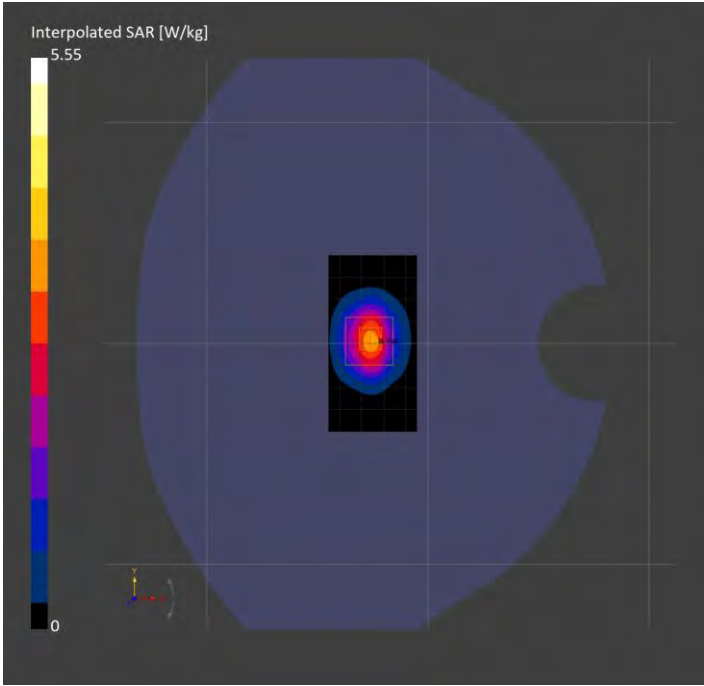

System Performance Check Report for D3500V2 - SN1011

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	39.9
Group UID	CW 0-	TSL Conductivity [S/m]	2.73
Conversion Factor	6.22	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7947 2025-09-10	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1798 2026-04-27	TSL Type	DAK 3.5 Head 23.75 deg.C 2026-Jun-01 13_12_11
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		76.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.94	3.07
psSAR10g [W/Kg]	1.13	1.18
Power Drift [±0.2 dB]	N/A	-0.03

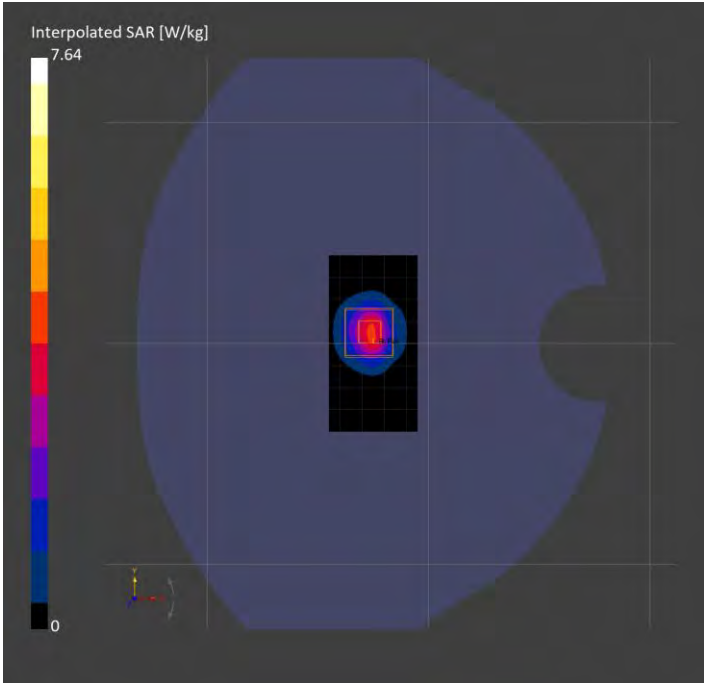

System Performance Check Report for D3700V2 - SN1039

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	39.6
Group UID	CW 0-	TSL Conductivity [S/m]	2.95
Conversion Factor	6.17	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7947 2025-09-10	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1798 2026-04-27	TSL Type	DAK 3.5 Head 23.75 deg.C 2026-Jun-01 13_12_11
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		75.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.15	3.29
psSAR10g [W/Kg]	1.16	1.23
Power Drift [±0.2 dB]	N/A	-0.05

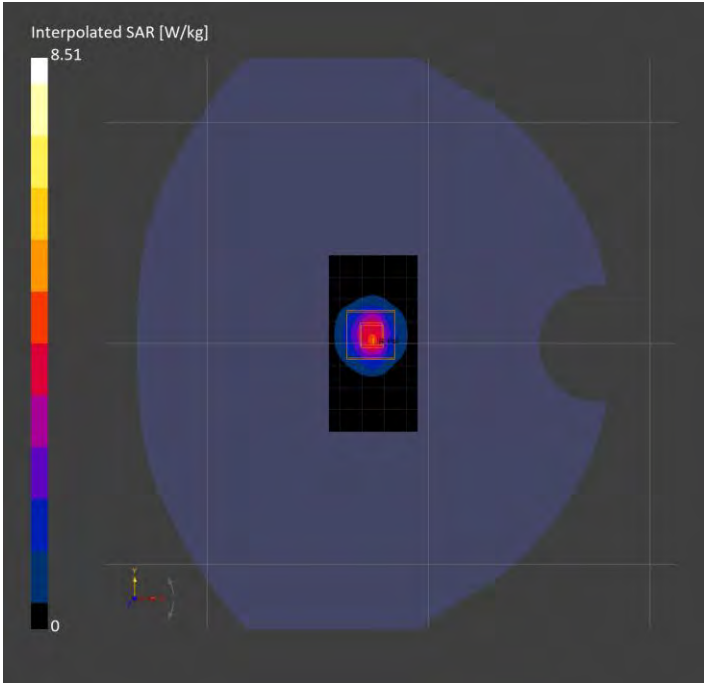

System Performance Check Report for D2600V2 - SN1006

Exposure Conditions

Frequency [MHz] Channel Number	2600.000 0	TSL Permittivity	41.1
Group UID	CW 0-	TSL Conductivity [S/m]	1.95
Conversion Factor	6.91	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7947 2025-09-10	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1798 2026-04-27	TSL Type	DAKS 3.5 Head 24.23 deg.C 2026-Jun-04 22_22_35
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		80.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.75	2.73
psSAR10g [W/Kg]	1.23	1.24
Power Drift [±0.2 dB]	N/A	-0.01

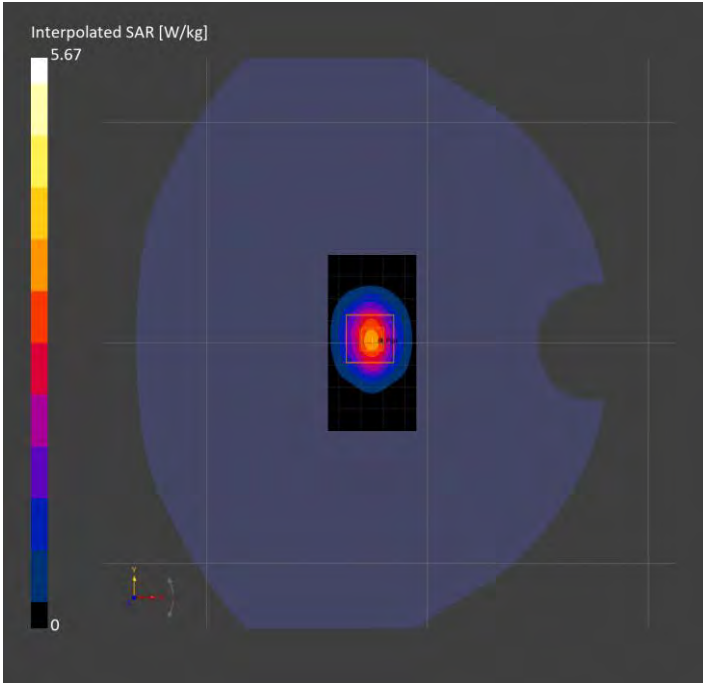

System Performance Check Report for D3500V2 - SN1011

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	38.9
Group UID	CW 0-	TSL Conductivity [S/m]	2.76
Conversion Factor	6.2	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7463 2026-04-24	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1917 2025-09-10	TSL Type	DAK 3.5 Head 20.68 deg.C 2026-May-25 10_23_40
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		77.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.99	3.00
psSAR10g [W/Kg]	1.14	1.15
Power Drift [±0.2 dB]	N/A	-0.05

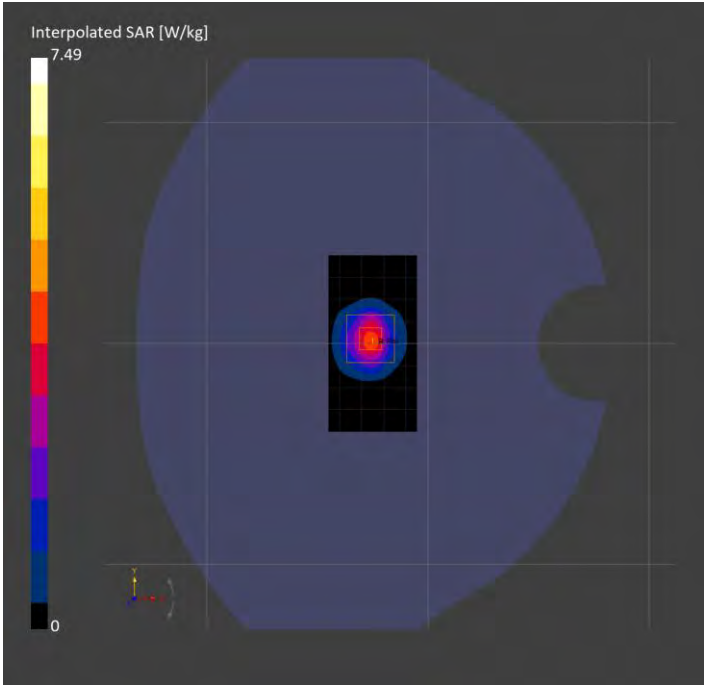

System Performance Check Report for D3700V2 - SN1039

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	38.7
Group UID	CW 0-	TSL Conductivity [S/m]	2.95
Conversion Factor	6.08	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7463 2026-04-24	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1917 2025-09-10	TSL Type	DAK 3.5 Head 20.68 deg.C 2026-May-25 10_23_40
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		75.7
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.10	6.25
psSAR10g [W/Kg]	2.29	2.34
Power Drift [±0.2 dB]	N/A	-0.02

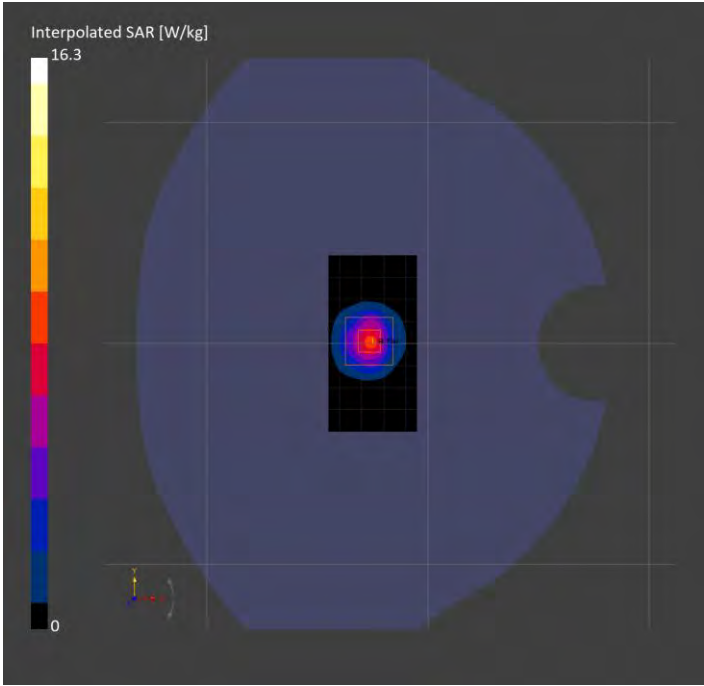

System Performance Check Report for D3900V2 - SN1102

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	38.4
Group UID	CW 0-	TSL Conductivity [S/m]	3.16
Conversion Factor	5.97	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7463 2026-04-24	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1917 2025-09-10	TSL Type	DAK 3.5 Head 20.68 deg.C 2026-May-25 10_23_40
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		74.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.49	6.59
psSAR10g [W/Kg]	2.29	2.33
Power Drift [±0.2 dB]	N/A	-0.02

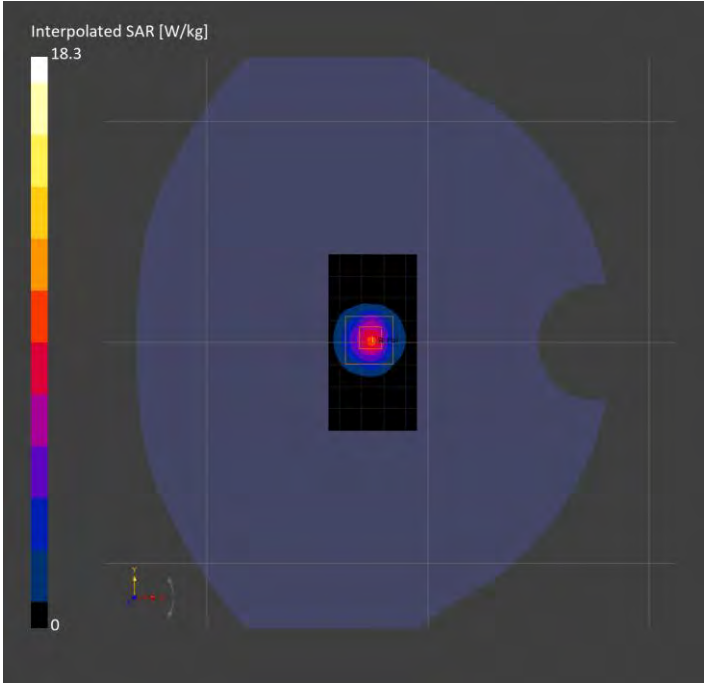

System Performance Check Report for D3500V2 - SN1060

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	37.8
Group UID	CW 0-	TSL Conductivity [S/m]	2.74
Conversion Factor	6.2	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7463 2026-04-24	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1917 2025-09-10	TSL Type	DAKS 3.5 Head 23.34 deg.C 2026-Jun-05 01_15_33
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		77.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.14	3.12
psSAR10g [W/Kg]	1.22	1.21
Power Drift [±0.2 dB]	N/A	-0.13

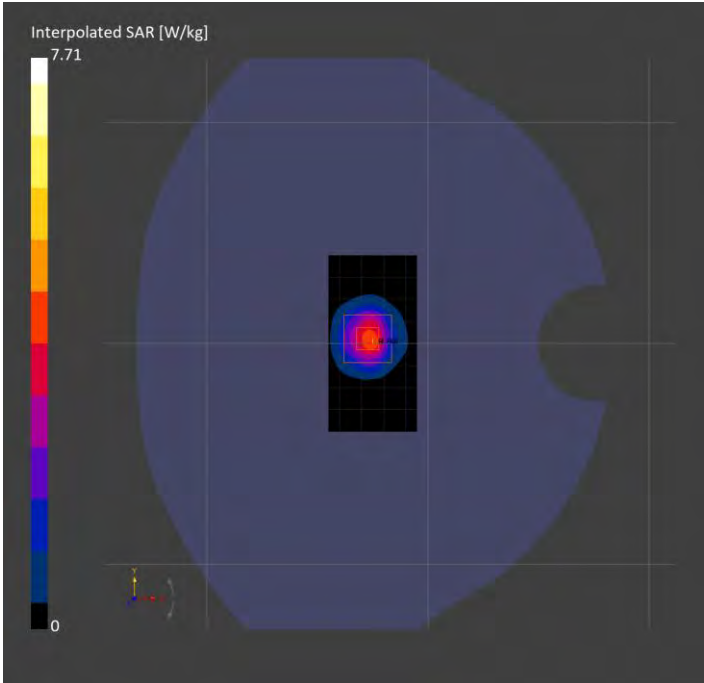

System Performance Check Report for D3700V2 - SN1110

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	37.3
Group UID	CW 0-	TSL Conductivity [S/m]	2.93
Conversion Factor	6.08	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7463 2026-04-24	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1917 2025-09-10	TSL Type	DAKS 3.5 Head 23.34 deg.C 2026-Jun-05 01_15_33
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		76.0
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.18	3.30
psSAR10g [W/Kg]	1.22	1.25
Power Drift [±0.2 dB]	N/A	0.01

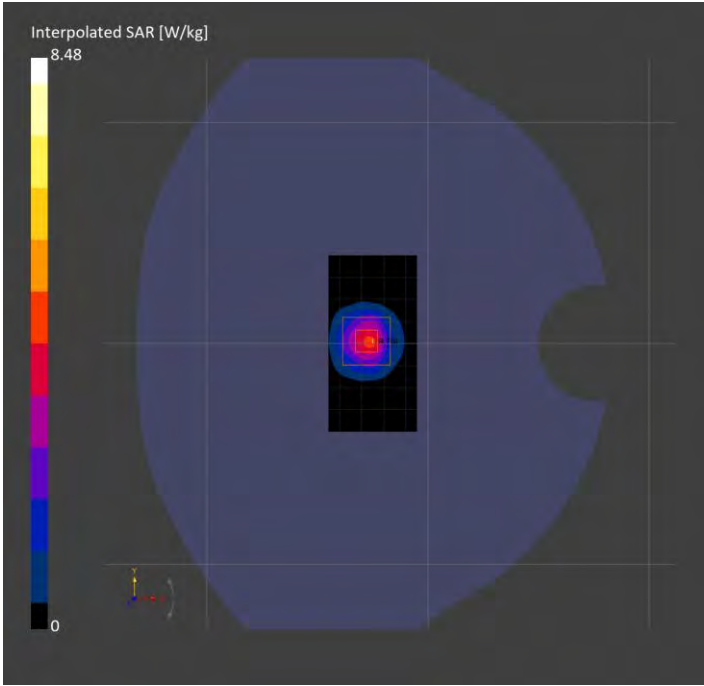

System Performance Check Report for D3900V2 - SN1115

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	36.8
Group UID	CW 0-	TSL Conductivity [S/m]	3.10
Conversion Factor	5.97	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7463 2026-04-24	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1917 2025-09-10	TSL Type	DAKS 3.5 Head 23.34 deg.C 2026-Jun-05 01_15_33
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		74.4
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.1

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.31	3.40
psSAR10g [W/Kg]	1.19	1.22
Power Drift [±0.2 dB]	N/A	-0.02

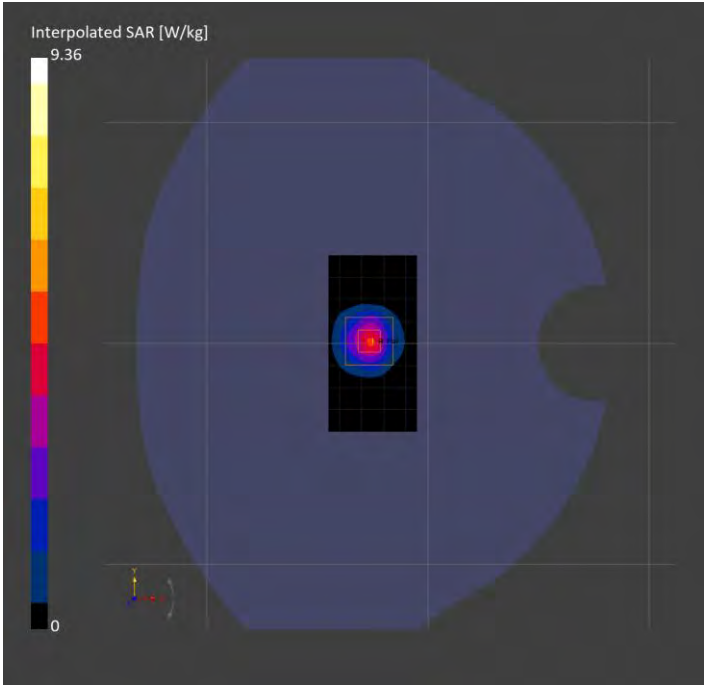

System Performance Check Report for D5GHzV2 - SN1138

Exposure Conditions

Frequency [MHz] Channel Number	5250.000 0	TSL Permittivity	36.5
Group UID	CW 0-	TSL Conductivity [S/m]	4.39
Conversion Factor	5.89	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7915 2025-11-07	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1883 2025-10-15	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		66.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.2

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	7.30	7.64
psSAR10g [W/Kg]	2.09	2.26
Power Drift [±0.2 dB]	N/A	-0.01

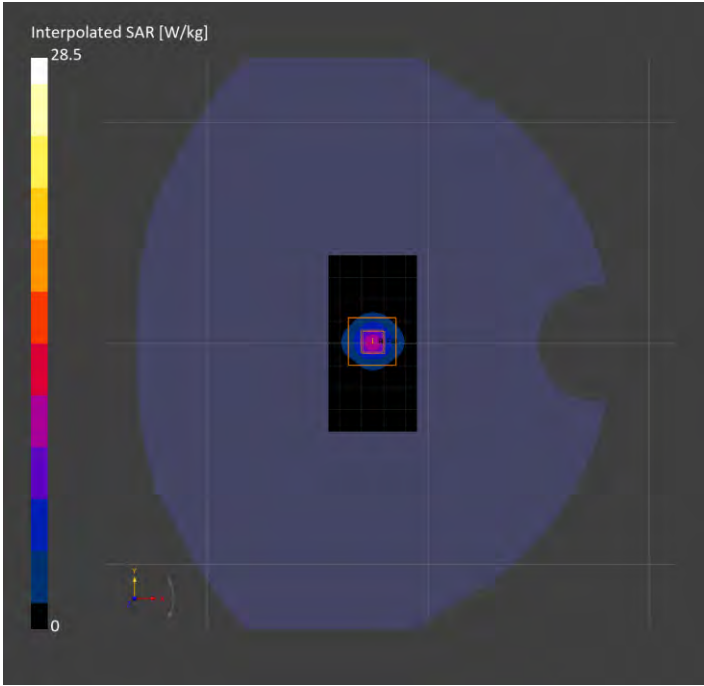

System Performance Check Report for D5GHzV2 - SN1168

Exposure Conditions

Frequency [MHz] Channel Number	5250.000 0	TSL Permittivity	36.7
Group UID	CW 0-	TSL Conductivity [S/m]	4.45
Conversion Factor	5.89	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7915 2025-11-07	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1883 2025-10-15	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		65.6
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.91	4.34
psSAR10g [W/Kg]	1.18	1.27
Power Drift [±0.2 dB]	N/A	0.03

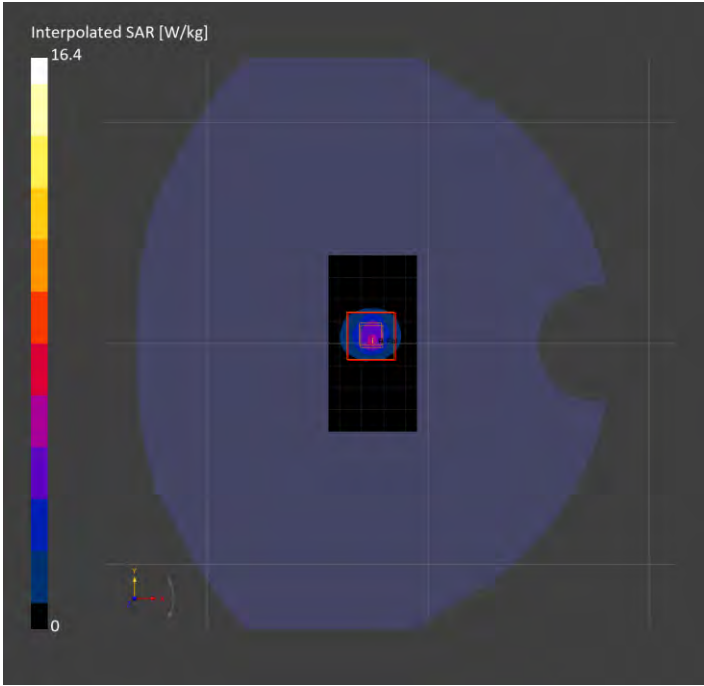

System Performance Check Report for D5GHzV2 - SN1138

Exposure Conditions

Frequency [MHz] Channel Number	5250.000 0	TSL Permittivity	34.7
Group UID	CW 0-	TSL Conductivity [S/m]	4.37
Conversion Factor	5.78	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7914 2025-11-07	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1893 2025-11-12	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		64.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	7.61	8.21
psSAR10g [W/Kg]	2.24	2.38
Power Drift [±0.2 dB]	N/A	0.06

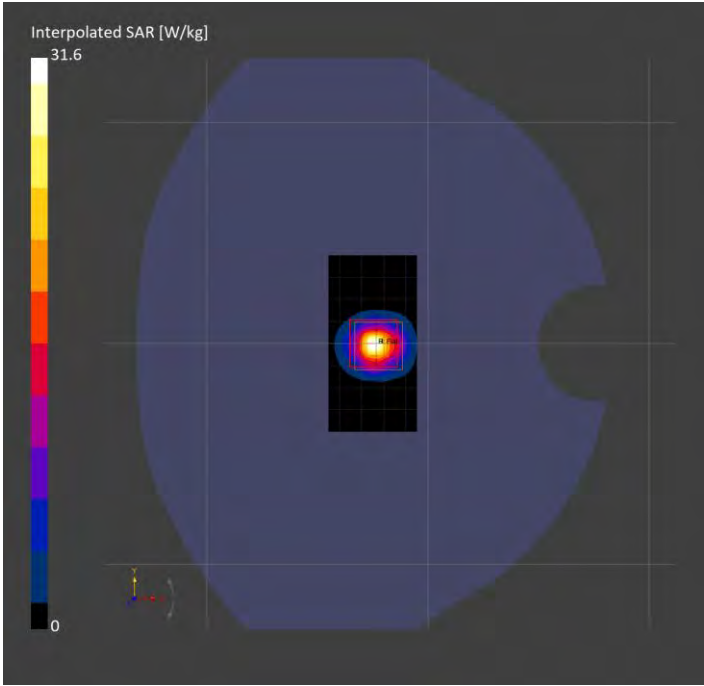

System Performance Check Report for D2450V2 - SN748

Exposure Conditions

Frequency [MHz] Channel Number	2450.000 0	TSL Permittivity	37.6
Group UID	CW 0-	TSL Conductivity [S/m]	1.70
Conversion Factor	7.02	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7914 2025-11-07	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1893 2025-11-12	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		82.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.16	5.12
psSAR10g [W/Kg]	2.41	2.47
Power Drift [±0.2 dB]	N/A	-0.01

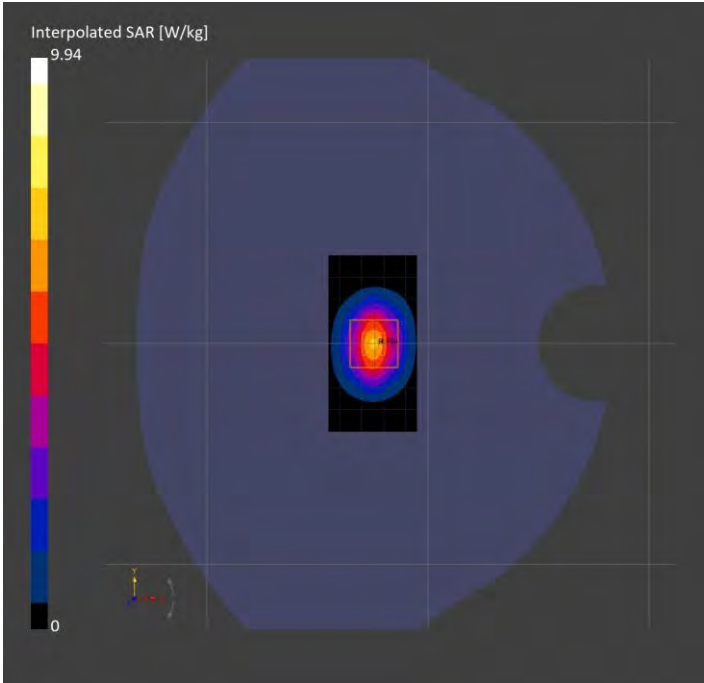

System Performance Check Report for D5GHzV2 - SN1168

Exposure Conditions

Frequency [MHz] Channel Number	5250.000 0	TSL Permittivity	34.5
Group UID	CW 0-	TSL Conductivity [S/m]	4.35
Conversion Factor	5.78	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7914 2025-11-07	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1893 2025-11-12	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		65.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	8.13	8.54
psSAR10g [W/Kg]	2.34	2.52
Power Drift [±0.2 dB]	N/A	0.04

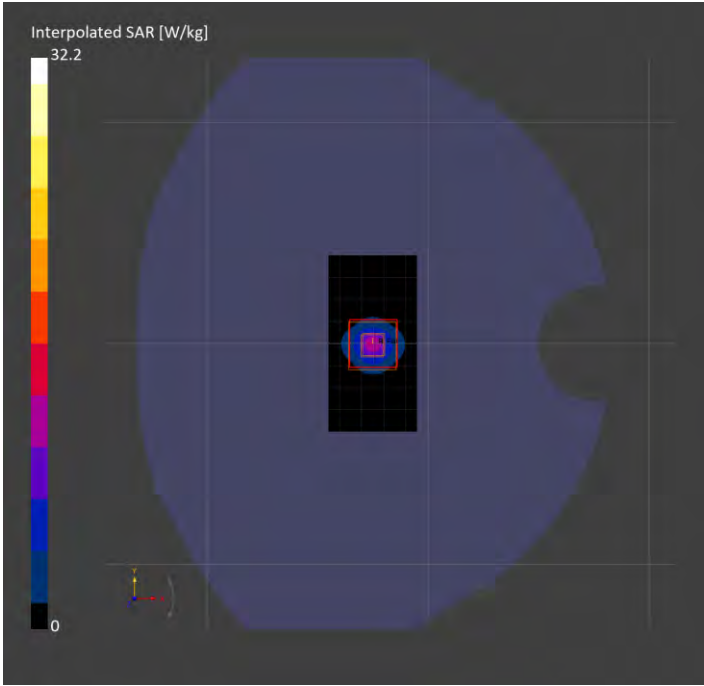

System Performance Check Report for D5GHzV2 - SN1003

Exposure Conditions

Frequency [MHz] Channel Number	5600.000 0	TSL Permittivity	35.9
Group UID	CW 0-	TSL Conductivity [S/m]	4.85
Conversion Factor	5.65	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3989 2026-01-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1472 2026-01-08	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	36.0 x 32.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		61.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.2

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.82	4.21
psSAR10g [W/Kg]	1.08	1.20
Power Drift [±0.2 dB]	N/A	0.05

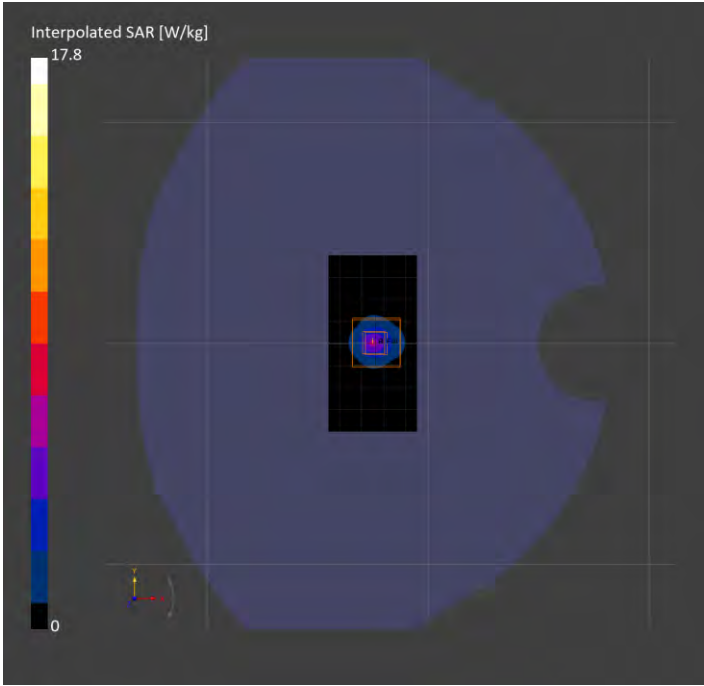

System Performance Check Report for D5GHzV2 - SN1003

Exposure Conditions

Frequency [MHz] Channel Number	5750.000 0	TSL Permittivity	35.6
Group UID	CW 0-	TSL Conductivity [S/m]	5.00
Conversion Factor	5.73	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3989 2026-01-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1472 2026-01-08	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	32.0 x 32.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		58.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.24	3.67
psSAR10g [W/Kg]	0.911	1.04
Power Drift [±0.2 dB]	N/A	0.06

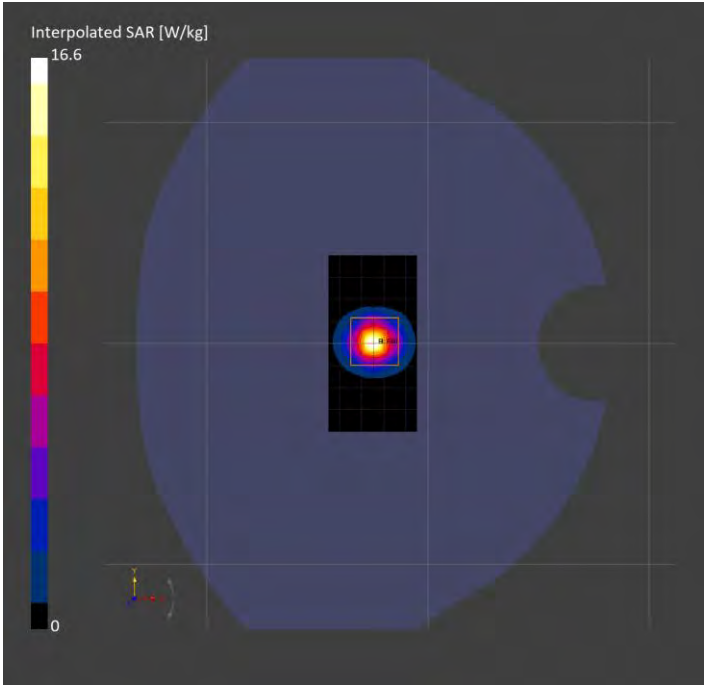

System Performance Check Report for D5GHzV2 - SN1168

Exposure Conditions

Frequency [MHz] Channel Number	5600.000 0	TSL Permittivity	36.9
Group UID	CW 0-	TSL Conductivity [S/m]	4.75
Conversion Factor	5.65	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3989 2026-01-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1472 2026-01-08	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		60.7
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.2

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	7.11	7.77
psSAR10g [W/Kg]	2.02	2.21
Power Drift [±0.2 dB]	N/A	0.03

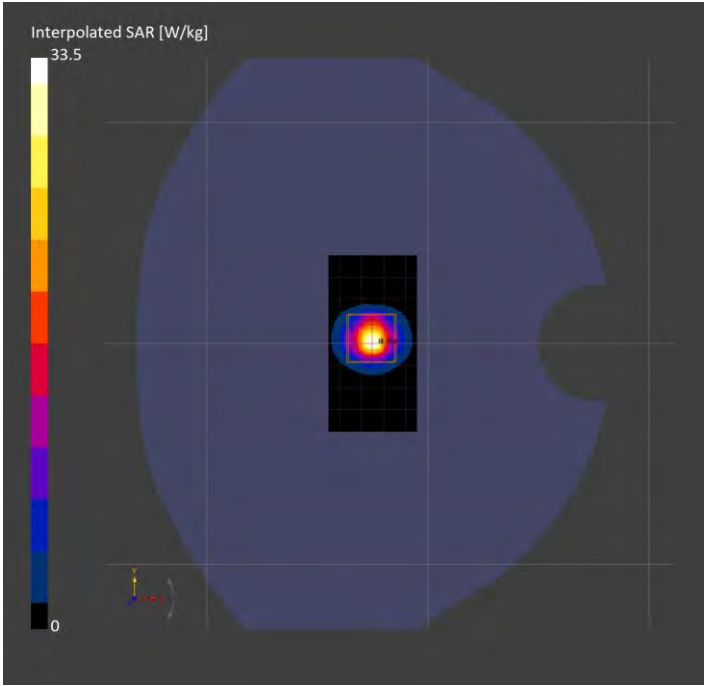

System Performance Check Report for D5GHzV2 - SN1168

Exposure Conditions

Frequency [MHz] Channel Number	5750.000 0	TSL Permittivity	36.9
Group UID	CW 0-	TSL Conductivity [S/m]	4.92
Conversion Factor	5.73	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3989 2026-01-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1472 2026-01-08	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		58.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.2

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.56	7.15
psSAR10g [W/Kg]	1.86	2.04
Power Drift [±0.2 dB]	N/A	0.04

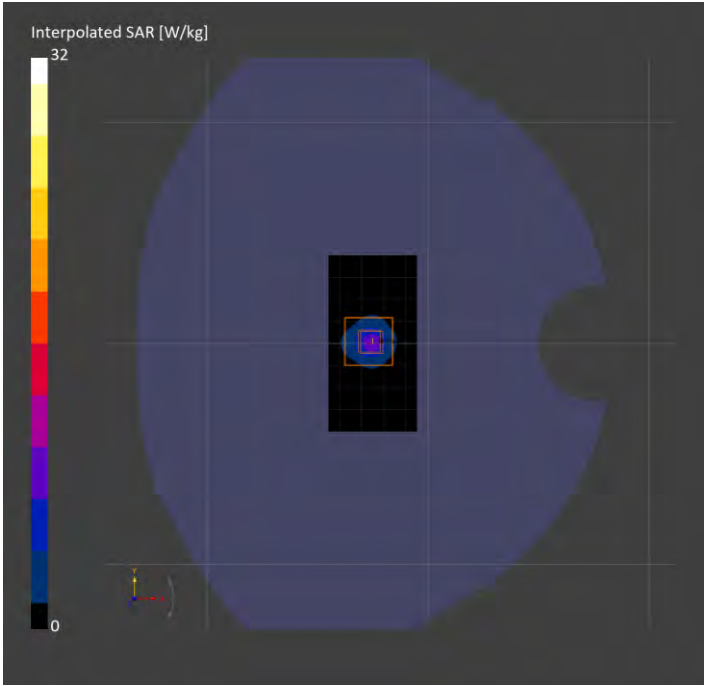

System Performance Check Report for D2450V2 - SN706

Exposure Conditions

Frequency [MHz] Channel Number	2450.000 0	TSL Permittivity	37.5
Group UID	CW 0-	TSL Conductivity [S/m]	1.81
Conversion Factor	7.3	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7808 2026-03-12	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1546 2026-03-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		82.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.80	2.82
psSAR10g [W/Kg]	1.33	1.34
Power Drift [±0.2 dB]	0.01	-0.00

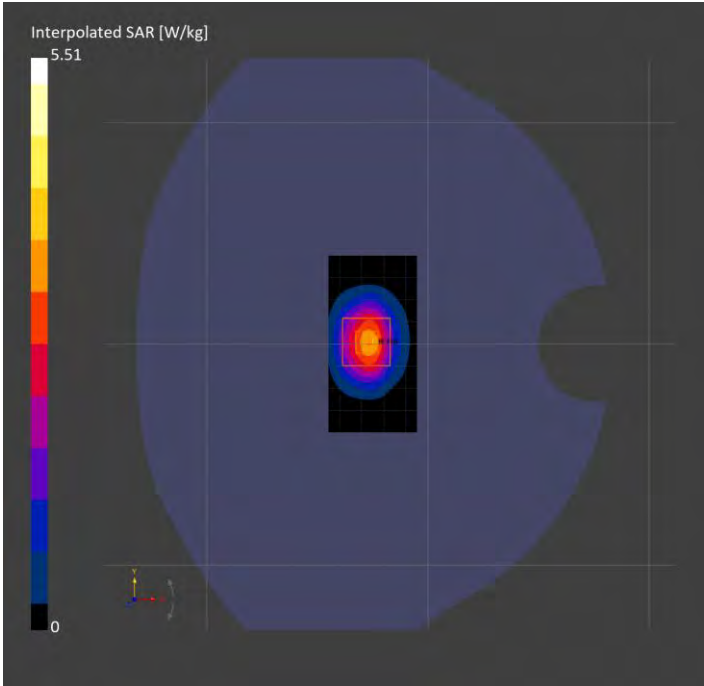

System Performance Check Report for D2450V2 - SN706

Exposure Conditions

Frequency [MHz] Channel Number	2450.000 0	TSL Permittivity	39.8
Group UID	CW 0-	TSL Conductivity [S/m]	1.81
Conversion Factor	8.17	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7501 2026-04-23	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1675 2026-04-28	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		81.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.37	2.40
psSAR10g [W/Kg]	1.13	1.13
Power Drift [±0.2 dB]	N/A	-0.00

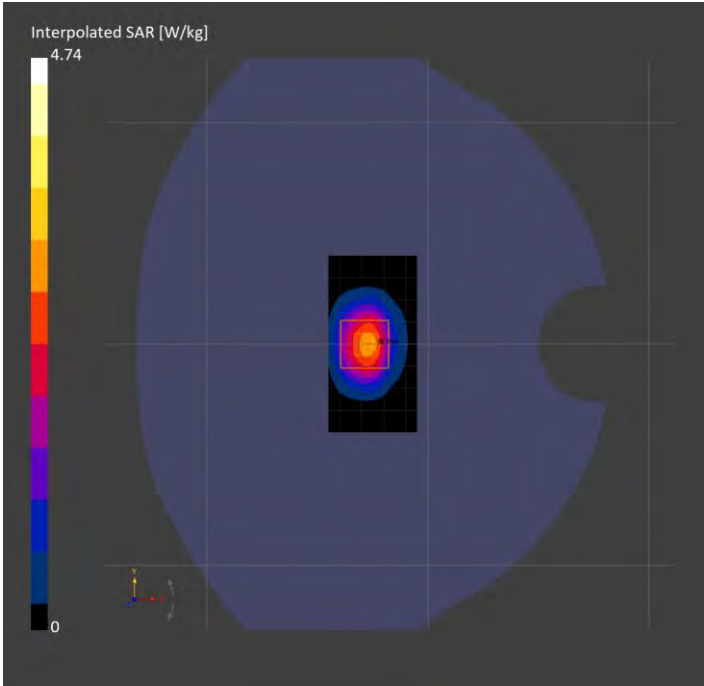

System Performance Check Report for D2450V2 - SN748

Exposure Conditions

Frequency [MHz] Channel Number	2450.000 0	TSL Permittivity	39.5
Group UID	CW 0-	TSL Conductivity [S/m]	1.83
Conversion Factor	8.17	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7501 2026-04-23	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1675 2026-04-28	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		82.4
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.73	2.72
psSAR10g [W/Kg]	1.28	1.30
Power Drift [±0.2 dB]	N/A	-0.01

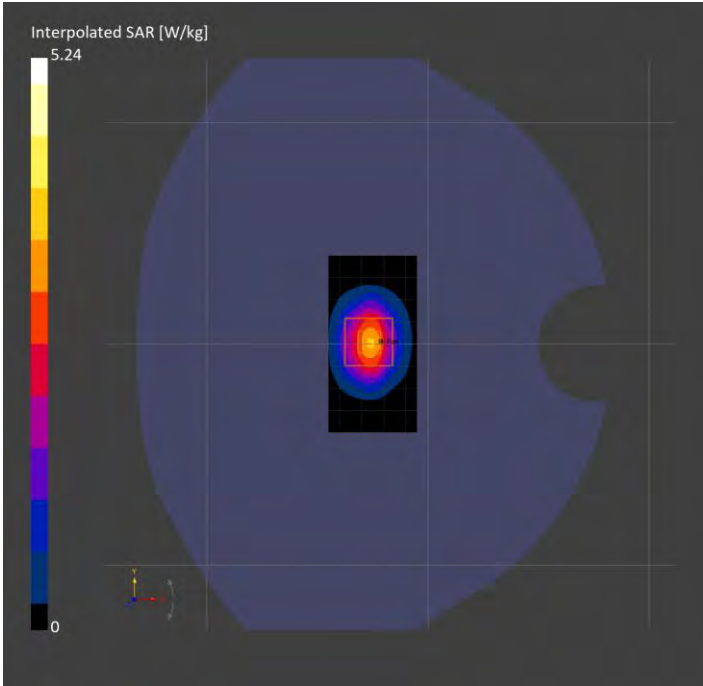

System Performance Check Report for D5GHzV2 - SN1168

Exposure Conditions

Frequency [MHz] Channel Number	5600.000 0	TSL Permittivity	33.8
Group UID	CW 0-	TSL Conductivity [S/m]	4.80
Conversion Factor	5.15	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3772 2026-02-13	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1881 2026-02-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	32.0 x 32.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		60.6
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.2

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	4.18	4.45
psSAR10g [W/Kg]	1.17	1.27
Power Drift [±0.2 dB]	N/A	-0.04

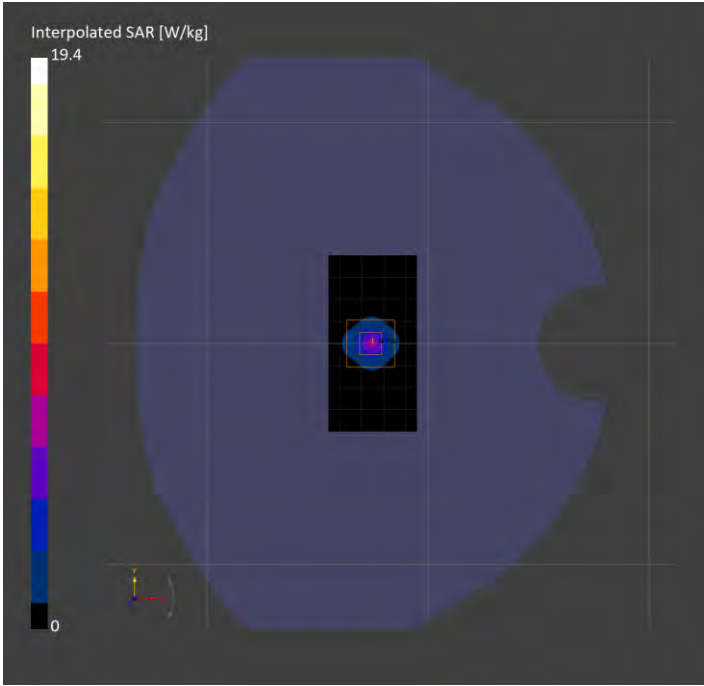

System Performance Check Report for D5GHzV2 - SN1003

Exposure Conditions

Frequency [MHz] Channel Number	5750.000 0	TSL Permittivity	35.0
Group UID	CW 0-	TSL Conductivity [S/m]	5.38
Conversion Factor	5.34	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3772 2026-02-13	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1881 2026-02-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		59.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.93	4.17
psSAR10g [W/Kg]	1.12	1.21
Power Drift [±0.2 dB]	N/A	-0.14

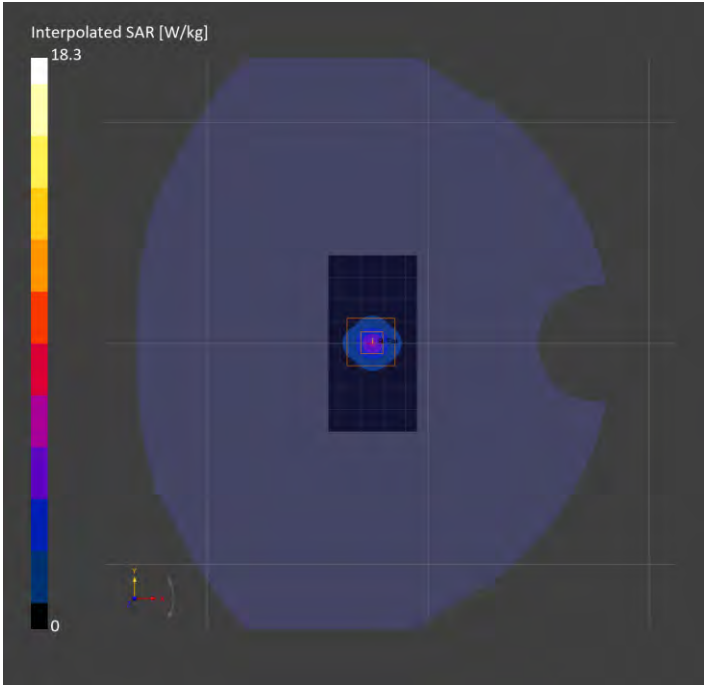

System Performance Check Report for D5GHzV2 - SN1168

Exposure Conditions

Frequency [MHz] Channel Number	5750.000 0	TSL Permittivity	34.2
Group UID	CW 0-	TSL Conductivity [S/m]	4.87
Conversion Factor	5.34	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3772 2026-02-13	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1881 2026-02-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		57.6
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.20	3.63
psSAR10g [W/Kg]	0.905	1.04
Power Drift [±0.2 dB]	N/A	-0.01

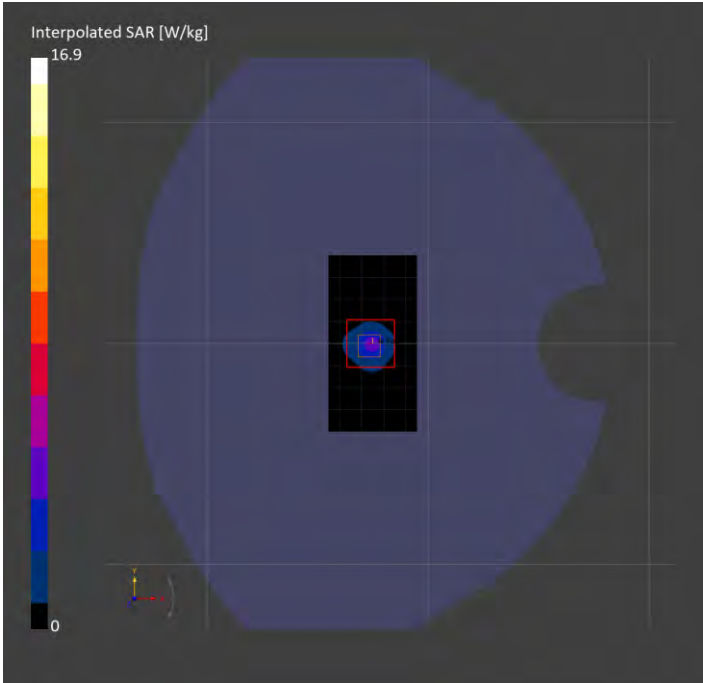

System Performance Check Report for D5GHzV2 - SN1003

Exposure Conditions

Frequency [MHz] Channel Number	5750.000 0	TSL Permittivity	35.4
Group UID	CW 0-	TSL Conductivity [S/m]	4.89
Conversion Factor	5.11	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3991 2025-10-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1258 2026-03-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	32.0 x 32.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		61.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.86	7.41
psSAR10g [W/Kg]	1.99	2.17
Power Drift [±0.2 dB]	N/A	-0.02

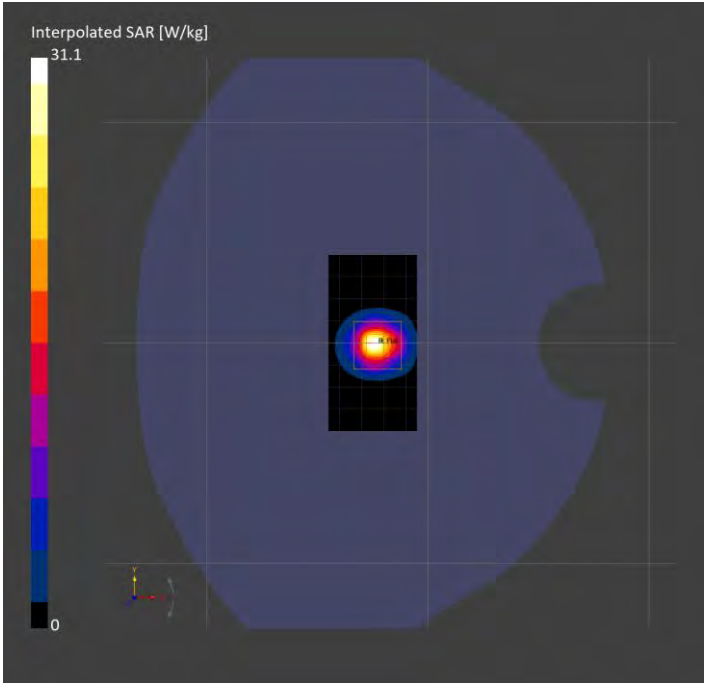

System Performance Check Report for D5GHzV2 - SN1003

Exposure Conditions

Frequency [MHz] Channel Number	5600.000 0	TSL Permittivity	35.8
Group UID	CW 0-	TSL Conductivity [S/m]	4.72
Conversion Factor	5.1	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3991 2025-10-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1258 2026-03-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	28.0 x 24.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		62.7
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	7.33	8.03
psSAR10g [W/Kg]	2.13	2.33
Power Drift [±0.2 dB]	N/A	-0.04

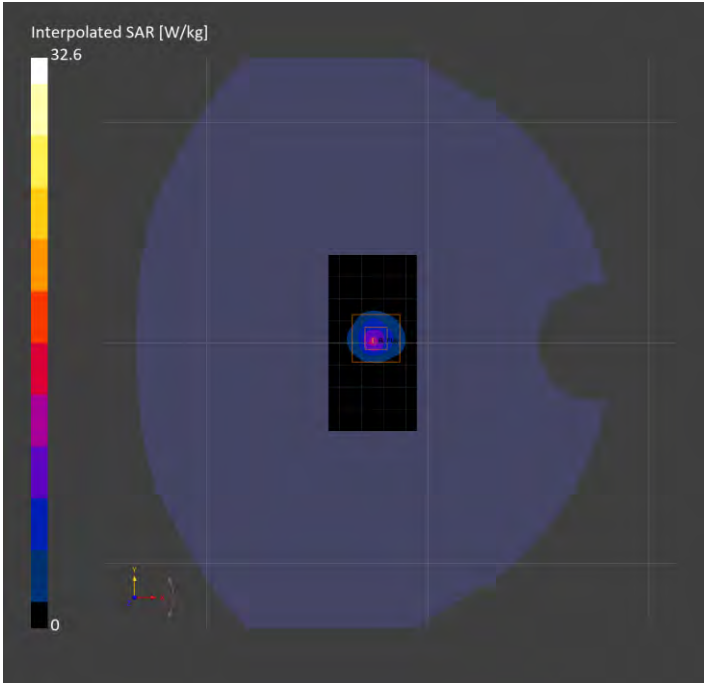

System Performance Check Report for D5GHzV2 - SN1168

Exposure Conditions

Frequency [MHz] Channel Number	5600.000 0	TSL Permittivity	36.9
Group UID	CW 0-	TSL Conductivity [S/m]	4.74
Conversion Factor	5.1	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3991 2025-10-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1258 2026-03-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	32.0 x 32.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		63.0
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.2

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	4.22	4.54
psSAR10g [W/Kg]	1.21	1.30
Power Drift [±0.2 dB]	N/A	-0.01

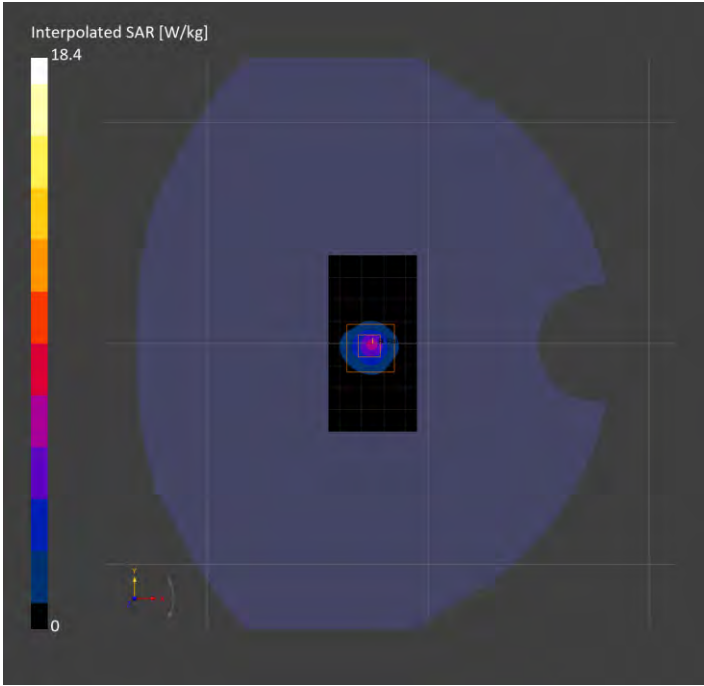

System Performance Check Report for D5GHzV2 - SN1168

Exposure Conditions

Frequency [MHz] Channel Number	5750.000 0	TSL Permittivity	36.6
Group UID	CW 0-	TSL Conductivity [S/m]	4.91
Conversion Factor	5.11	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3991 2025-10-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1258 2026-03-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 28.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		61.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.2

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	7.20	8.06
psSAR10g [W/Kg]	2.15	2.36
Power Drift [±0.2 dB]	N/A	0.05

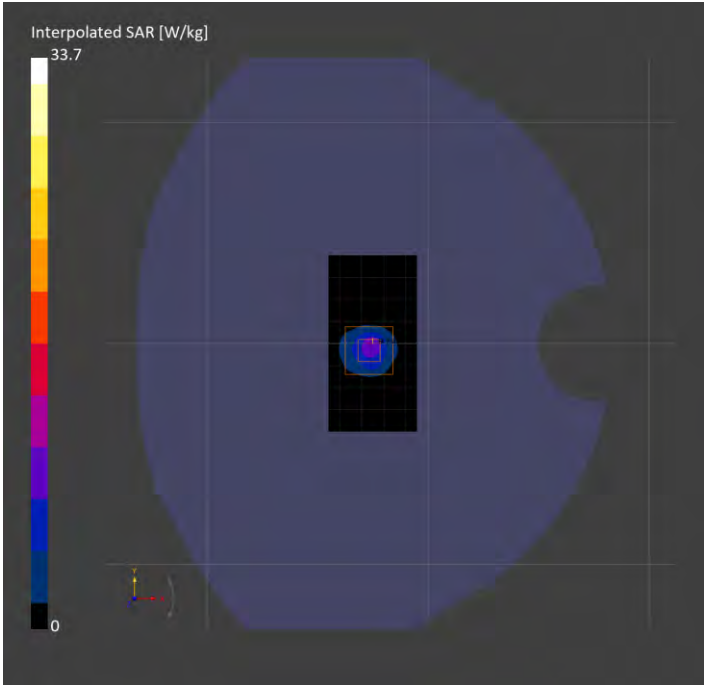

System Performance Check Report for D5GHzV2 - SN1138

Exposure Conditions

Frequency [MHz] Channel Number	5750.000 0	TSL Permittivity	37.3
Group UID	CW 0-	TSL Conductivity [S/m]	5.39
Conversion Factor	5.11	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3991 2025-10-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1258 2026-03-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	32.0 x 32.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		61.0
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.94	4.25
psSAR10g [W/Kg]	1.14	1.26
Power Drift [±0.2 dB]	N/A	0.09

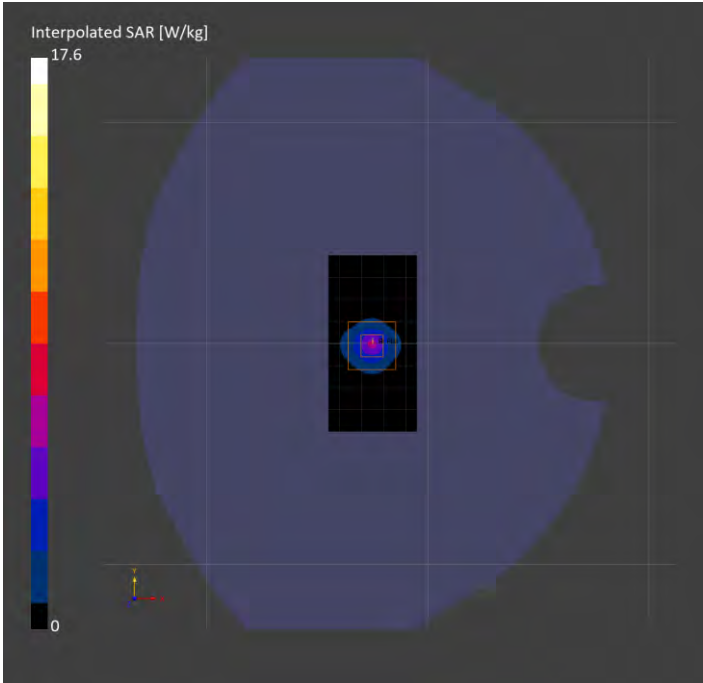

System Performance Check Report for D5GHzV2 - SN1138

Exposure Conditions

Frequency [MHz] Channel Number	5750.000 0	TSL Permittivity	33.6
Group UID	CW 0-	TSL Conductivity [S/m]	4.92
Conversion Factor	5.11	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3991 2025-10-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1258 2026-03-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	32.0 x 32.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		63.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.56	3.96
psSAR10g [W/Kg]	1.08	1.18
Power Drift [±0.2 dB]	N/A	0.05

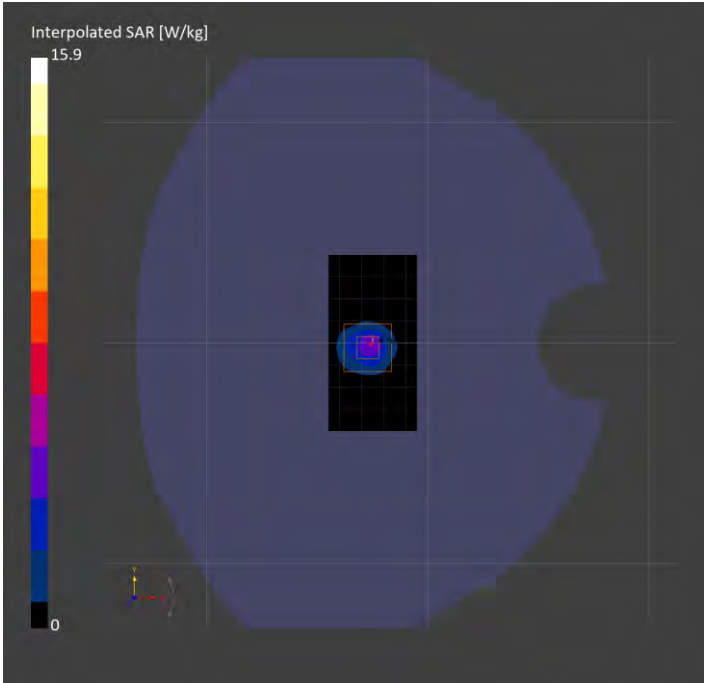

System Performance Check Report for D750V3 - SN1019

Exposure Conditions

Frequency [MHz] Channel Number	750.000 0	TSL Permittivity	40.6
Group UID	CW 0-	TSL Conductivity [S/m]	0.856
Conversion Factor	10.08	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7335 2026-01-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1715 2026-01-12	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		87.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		> 15.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.402	0.404
psSAR10g [W/Kg]	0.268	0.269
Power Drift [±0.2 dB]	0.00	-0.00

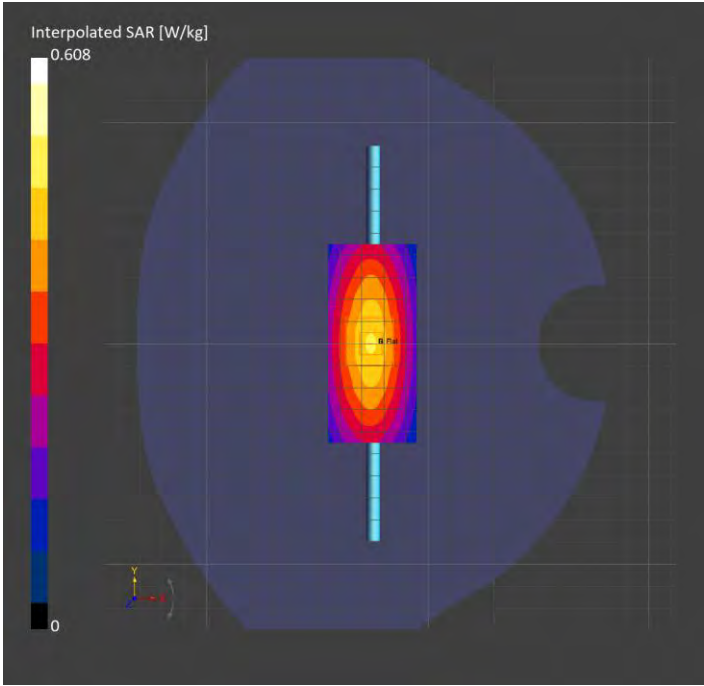

System Performance Check Report for D900V2 - SN1d143

Exposure Conditions

Frequency [MHz] Channel Number	900.000 0	TSL Permittivity	40.1
Group UID	CW 0-	TSL Conductivity [S/m]	0.915
Conversion Factor	9.59	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7335 2026-01-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1715 2026-01-12	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		87.4
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		15.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.487	0.494
psSAR10g [W/Kg]	0.319	0.324
Power Drift [±0.2 dB]	0.02	0.00

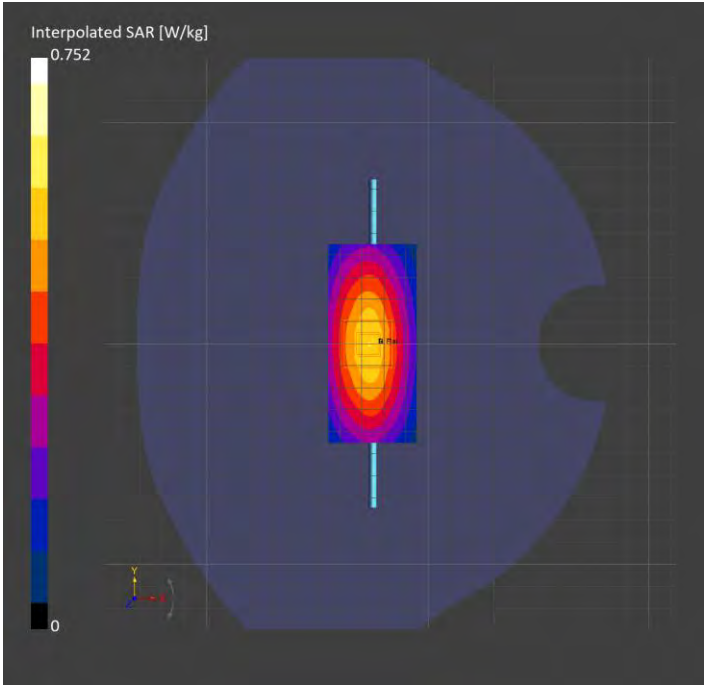

System Performance Check Report for D1900V2 - SN5d163

Exposure Conditions

Frequency [MHz] Channel Number	1900.000 0	TSL Permittivity	37.8
Group UID	CW 0-	TSL Conductivity [S/m]	1.45
Conversion Factor	7.85	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7335 2026-01-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1715 2026-01-12	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		83.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.06	2.08
psSAR10g [W/Kg]	1.07	1.09
Power Drift [±0.2 dB]	0.01	0.01

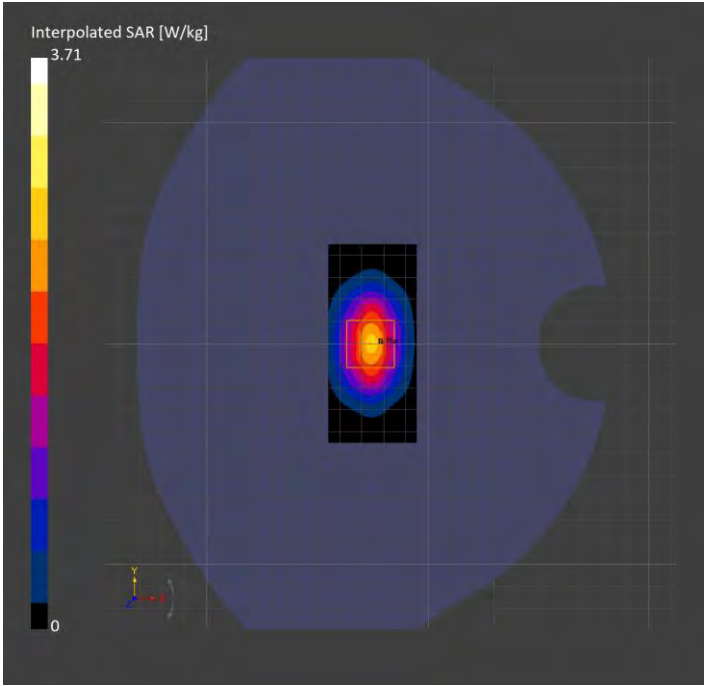

System Performance Check Report for D1900V2 - SN5d140

Exposure Conditions

Frequency [MHz] Channel Number	1900.000 0	TSL Permittivity	39.1
Group UID	CW 0-	TSL Conductivity [S/m]	1.39
Conversion Factor	7.85	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7335 2026-01-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1715 2026-01-12	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		85.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		10.8

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.95	1.97
psSAR10g [W/Kg]	1.01	1.04
Power Drift [±0.2 dB]	N/A	-0.00

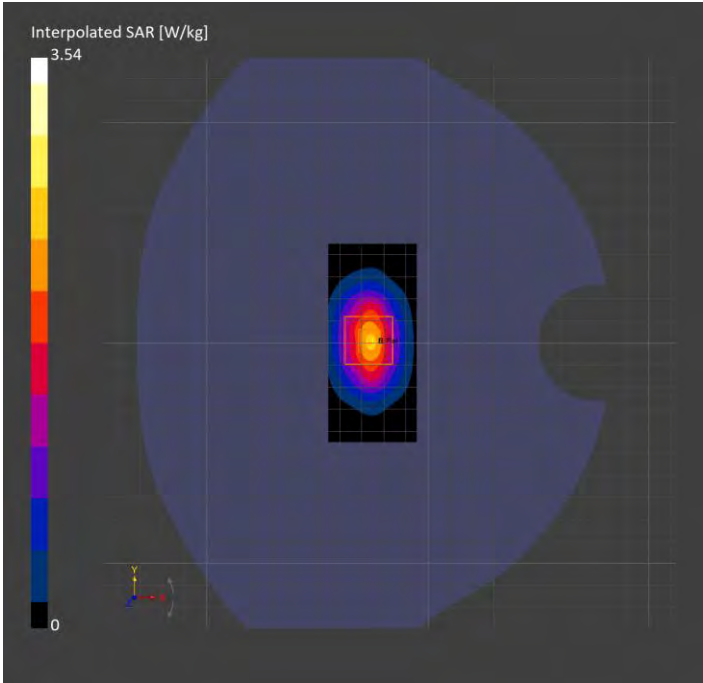

System Performance Check Report for D1750V2 - SN1220

Exposure Conditions

Frequency [MHz] Channel Number	1750.000 0	TSL Permittivity	38.2
Group UID	CW 0-	TSL Conductivity [S/m]	1.28
Conversion Factor	8.15	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7335 2026-01-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1715 2026-01-12	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		85.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		10.8

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.73	1.72
psSAR10g [W/Kg]	0.926	0.933
Power Drift [±0.2 dB]	N/A	-0.05

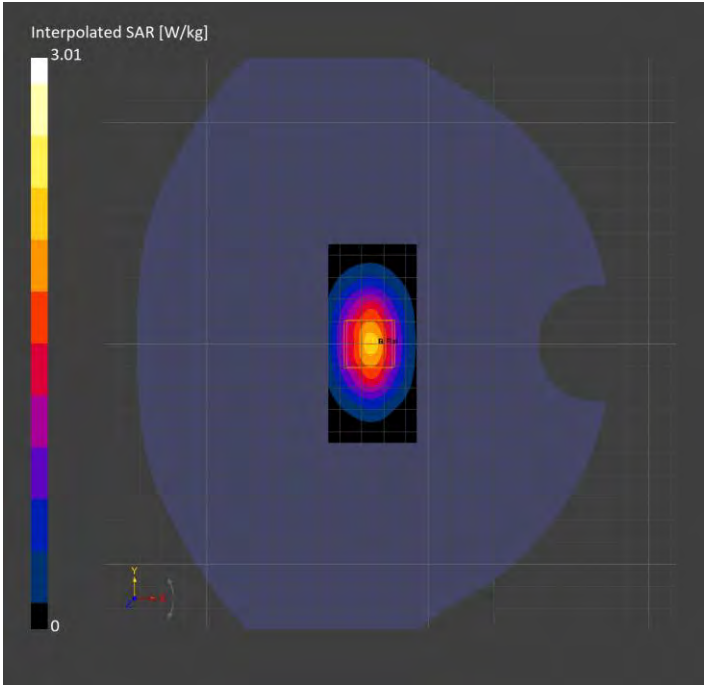

System Performance Check Report for D1900V2 - SN5d260

Exposure Conditions

Frequency [MHz] Channel Number	1900.000 0	TSL Permittivity	37.9
Group UID	CW 0-	TSL Conductivity [S/m]	1.35
Conversion Factor	7.85	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7335 2026-01-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1715 2026-01-12	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		84.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.9

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.91	1.95
psSAR10g [W/Kg]	1.00	1.03
Power Drift [±0.2 dB]	N/A	0.00

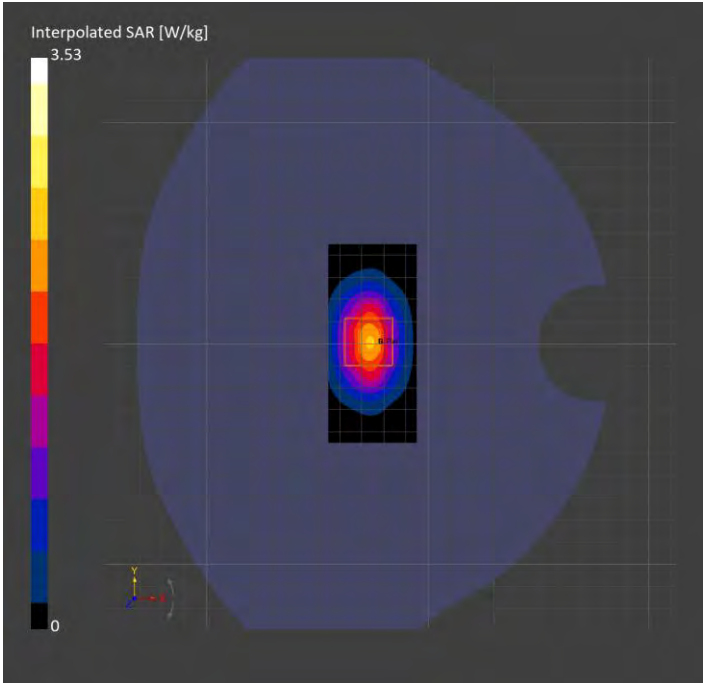

System Performance Check Report for D1750V2 - SN1053

Exposure Conditions

Frequency [MHz] Channel Number	1750.000 0	TSL Permittivity	39.3
Group UID	CW 0-	TSL Conductivity [S/m]	1.29
Conversion Factor	8.15	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7335 2026-01-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1715 2026-01-12	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		84.6
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		10.8

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.84	1.79
psSAR10g [W/Kg]	0.979	0.973
Power Drift [±0.2 dB]	N/A	-0.02

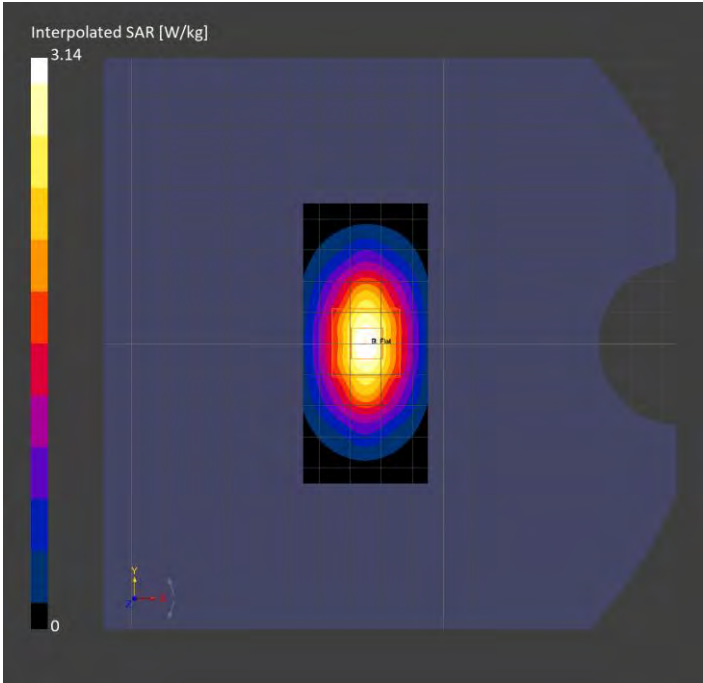

System Performance Check Report for D1750V2 - SN1050

Exposure Conditions

Frequency [MHz] Channel Number	1750.000 0	TSL Permittivity	42.5
Group UID	CW 0-	TSL Conductivity [S/m]	1.28
Conversion Factor	8.48	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7626 2026-05-05	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1799 2026-04-27	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		83.4
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		10.8

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.77	1.76
psSAR10g [W/Kg]	0.943	0.954
Power Drift [±0.2 dB]	N/A	-0.01

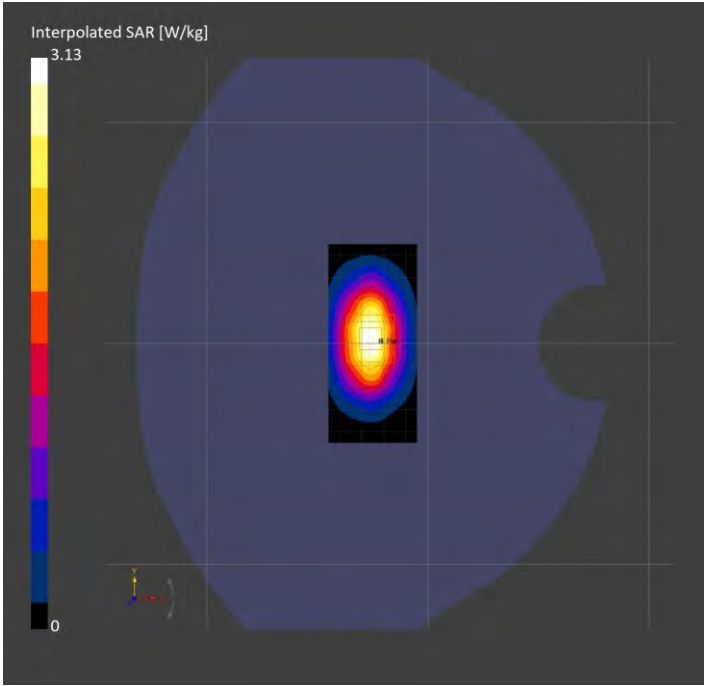

System Performance Check Report for D1750V2 - SN1053

Exposure Conditions

Frequency [MHz] Channel Number	1750.000 0	TSL Permittivity	39.8
Group UID	CW 0-	TSL Conductivity [S/m]	1.27
Conversion Factor	8.48	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7626 2026-05-05	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1799 2026-04-27	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		84.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		10.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.74	1.73
psSAR10g [W/Kg]	0.927	0.940
Power Drift [±0.2 dB]	N/A	0.00

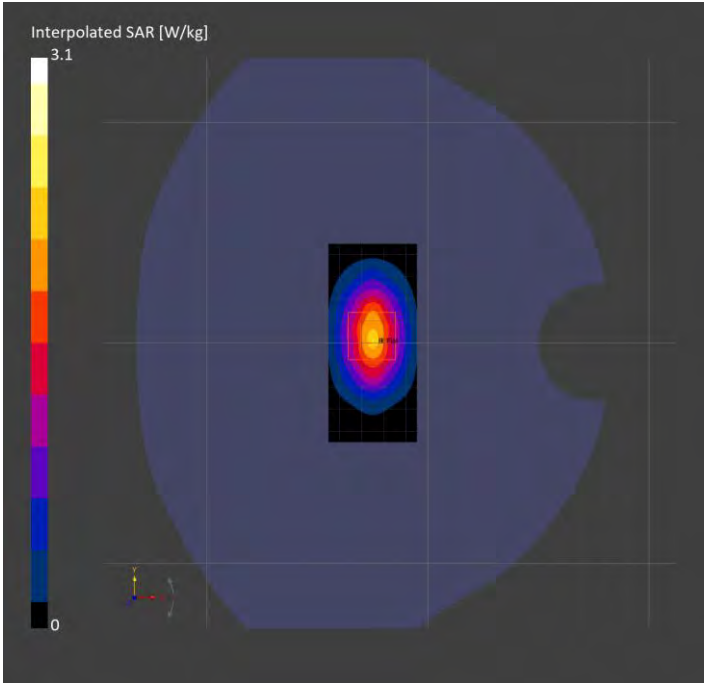

System Performance Check Report for D1900V2 - SN5d140

Exposure Conditions

Frequency [MHz] Channel Number	1900.000 0	TSL Permittivity	39.5
Group UID	CW 0-	TSL Conductivity [S/m]	1.34
Conversion Factor	8.35	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7626 2026-05-05	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1799 2026-04-27	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		83.7
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.90	1.88
psSAR10g [W/Kg]	0.979	0.994
Power Drift [±0.2 dB]	N/A	-0.00

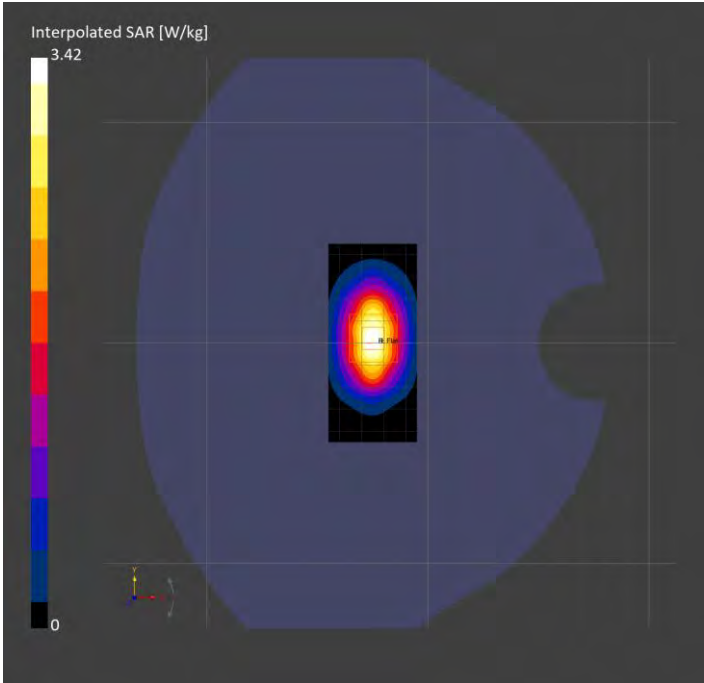

System Performance Check Report for D1900V2 - SN5d163

Exposure Conditions

Frequency [MHz] Channel Number	1900.000 0	TSL Permittivity	42.4
Group UID	CW 0-	TSL Conductivity [S/m]	1.36
Conversion Factor	7.63	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7807 2026-05-06	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1257 2025-09-09	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		84.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.87	1.87
psSAR10g [W/Kg]	0.982	1.00
Power Drift [±0.2 dB]	N/A	0.06

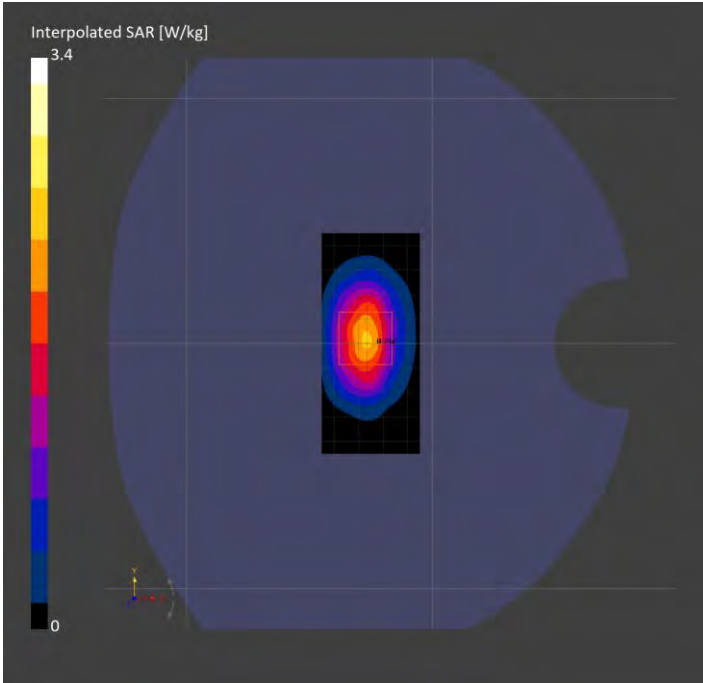

System Performance Check Report for D1900V2 - SN5d163

Exposure Conditions

Frequency [MHz] Channel Number	1900.000 0	TSL Permittivity	43.1
Group UID	CW 0-	TSL Conductivity [S/m]	1.35
Conversion Factor	7.63	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7807 2026-05-06	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1257 2025-09-09	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		85.4
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.90	1.84
psSAR10g [W/Kg]	0.991	0.978
Power Drift [±0.2 dB]	N/A	0.01

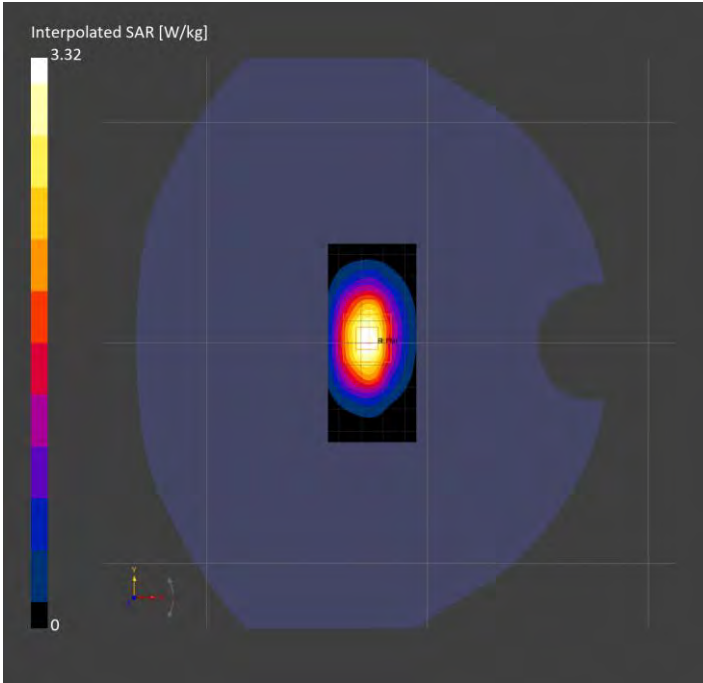

System Performance Check Report for D1750V2 - SN1050

Exposure Conditions

Frequency [MHz] Channel Number	1750.000 0	TSL Permittivity	42.1
Group UID	CW 0-	TSL Conductivity [S/m]	1.25
Conversion Factor	7.73	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7807 2026-05-06	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1257 2025-09-09	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		85.6
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.7

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.70	1.69
psSAR10g [W/Kg]	0.916	0.923
Power Drift [±0.2 dB]	N/A	0.02

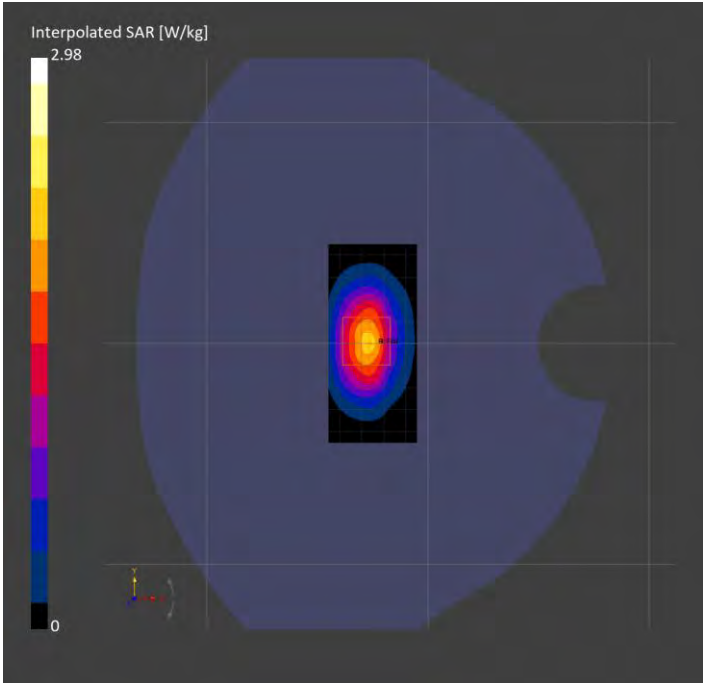

System Performance Check Report for D1900V2 - SN5d140

Exposure Conditions

Frequency [MHz] Channel Number	1900.000 0	TSL Permittivity	42.0
Group UID	CW 0-	TSL Conductivity [S/m]	1.34
Conversion Factor	7.63	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7807 2026-05-06	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1257 2025-09-09	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		85.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.88	1.87
psSAR10g [W/Kg]	0.987	0.999
Power Drift [±0.2 dB]	N/A	0.02

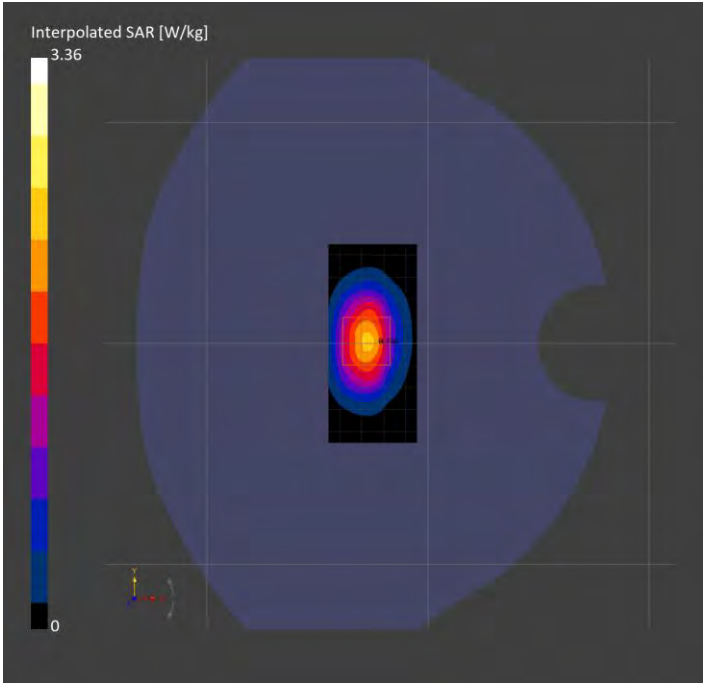

System Performance Check Report for D1750V2 - SN1220

Exposure Conditions

Frequency [MHz] Channel Number	1750.000 0	TSL Permittivity	42.7
Group UID	CW 0-	TSL Conductivity [S/m]	1.26
Conversion Factor	7.73	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7807 2026-05-06	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1257 2025-09-09	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		85.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.68	1.65
psSAR10g [W/Kg]	0.891	0.894
Power Drift [±0.2 dB]	N/A	-0.12

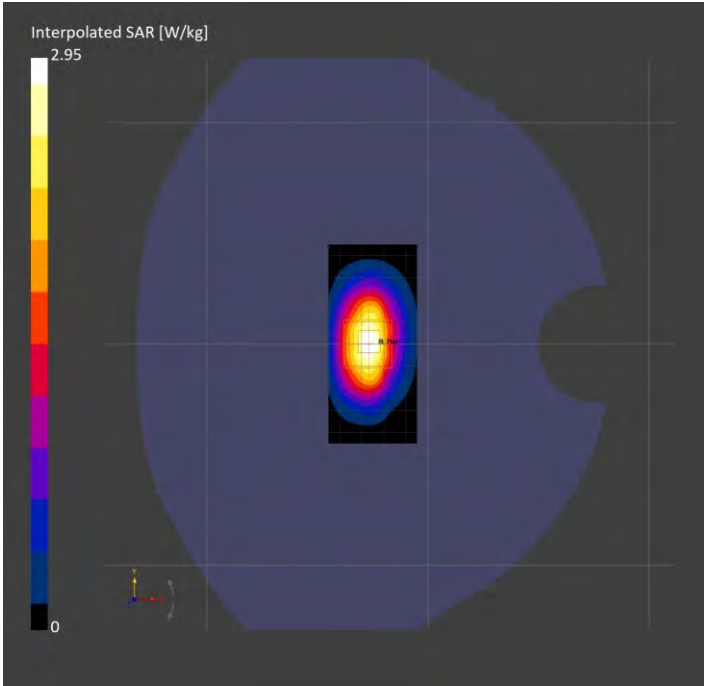

System Performance Check Report for D1640V2 - SN360

Exposure Conditions

Frequency [MHz] Channel Number	1640.000 0	TSL Permittivity	41.7
Group UID	CW 0-	TSL Conductivity [S/m]	1.20
Conversion Factor	7.81	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7807 2026-05-06	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1257 2025-09-09	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		85.7
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.58	1.56
psSAR10g [W/Kg]	0.873	0.869
Power Drift [±0.2 dB]	N/A	-0.02

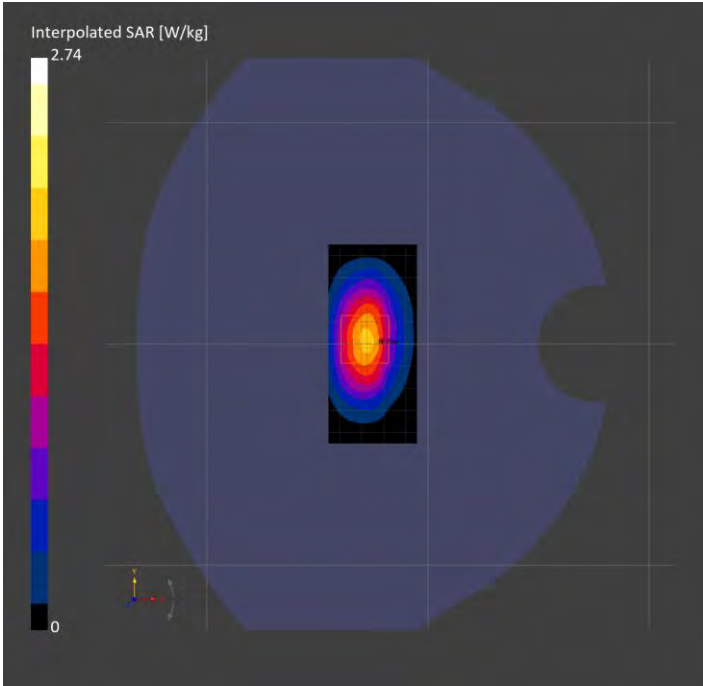

System Performance Check Report for D1640V2 - SN360

Exposure Conditions

Frequency [MHz] Channel Number	1640.000 0	TSL Permittivity	43.1
Group UID	CW 0-	TSL Conductivity [S/m]	1.30
Conversion Factor	8.47	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7356 2026-03-11	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1938 2026-02-18	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		84.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		10.8

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.66	1.65
psSAR10g [W/Kg]	0.901	0.911
Power Drift [±0.2 dB]	-0.04	0.02

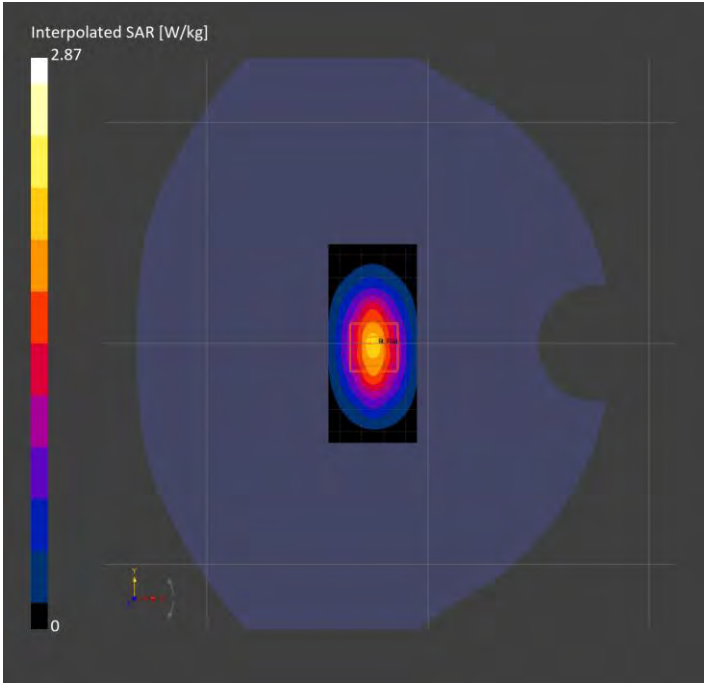

System Performance Check Report for D1750V2 - SN1053

Exposure Conditions

Frequency [MHz] Channel Number	1750.000 0	TSL Permittivity	37.0
Group UID	CW 0-	TSL Conductivity [S/m]	1.27
Conversion Factor	8.36	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7356 2026-03-11	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1938 2026-02-18	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		84.6
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		10.8

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.72	1.72
psSAR10g [W/Kg]	0.919	0.931
Power Drift [±0.2 dB]	0.00	0.02

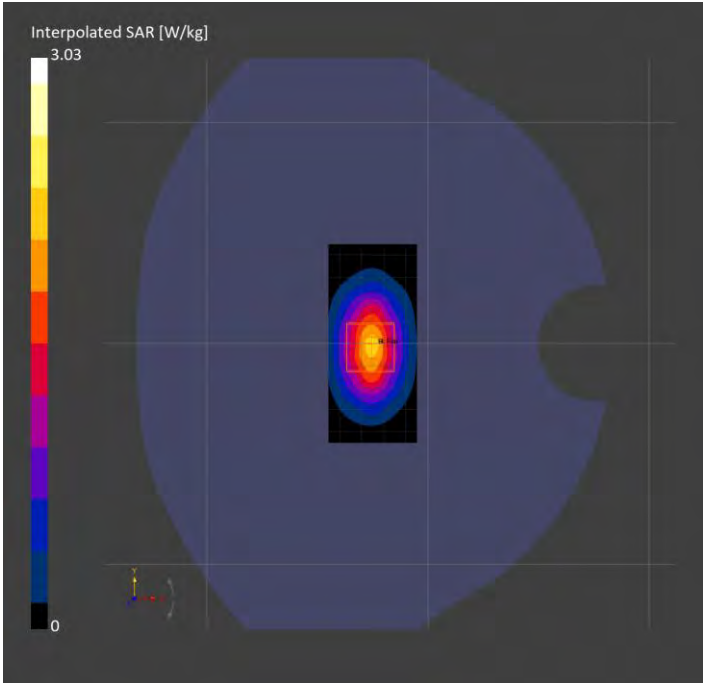

System Performance Check Report for D1900V2 - SN5d163

Exposure Conditions

Frequency [MHz] Channel Number	1900.000 0	TSL Permittivity	36.8
Group UID	CW 0-	TSL Conductivity [S/m]	1.35
Conversion Factor	8.05	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7356 2026-03-11	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1938 2026-02-18	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		83.7
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.7

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.86	1.85
psSAR10g [W/Kg]	0.969	0.975
Power Drift [±0.2 dB]	-0.11	-0.03

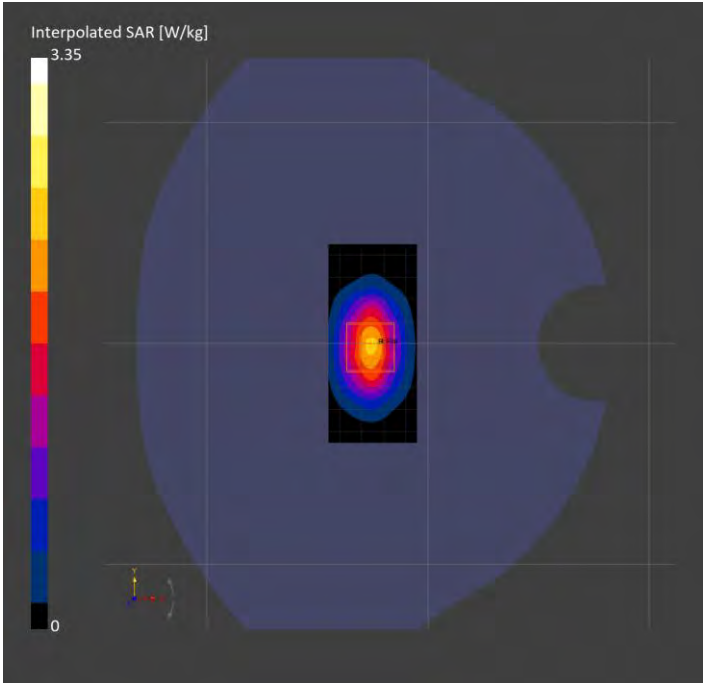

System Performance Check Report for D1640V2 - SN324

Exposure Conditions

Frequency [MHz] Channel Number	1640.000 0	TSL Permittivity	39.2
Group UID	CW 0-	TSL Conductivity [S/m]	1.21
Conversion Factor	8.47	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7356 2026-03-11	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1938 2026-02-18	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		84.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		10.8

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.55	1.54
psSAR10g [W/Kg]	0.843	0.851
Power Drift [±0.2 dB]	N/A	-0.01

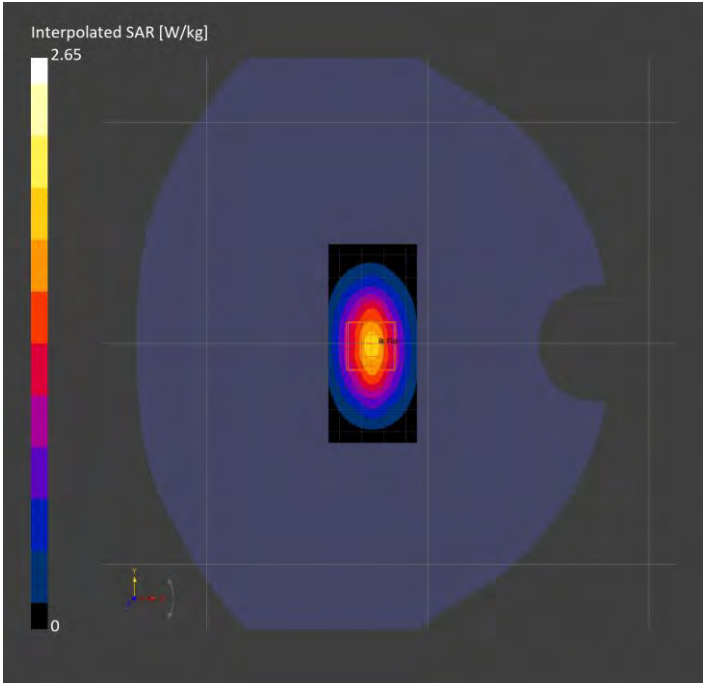

System Performance Check Report for D1750V2 - SN1050

Exposure Conditions

Frequency [MHz] Channel Number	1750.000 0	TSL Permittivity	38.9
Group UID	CW 0-	TSL Conductivity [S/m]	1.27
Conversion Factor	8.36	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7356 2026-03-11	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1938 2026-02-18	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		84.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		10.8

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.72	1.73
psSAR10g [W/Kg]	0.928	0.936
Power Drift [±0.2 dB]	N/A	0.01

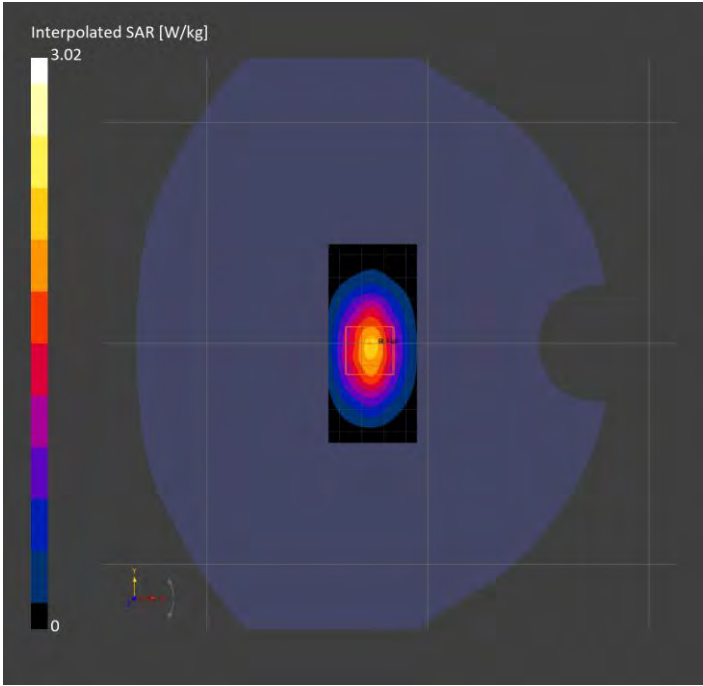

System Performance Check Report for D1750V2 - SN1053

Exposure Conditions

Frequency [MHz] Channel Number	1750.000 0	TSL Permittivity	41.9
Group UID	CW 0-	TSL Conductivity [S/m]	1.26
Conversion Factor	7.94	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7909 2025-10-14	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1433 2026-02-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		85.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		10.8

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.75	1.74
psSAR10g [W/Kg]	0.932	0.954
Power Drift [±0.2 dB]	N/A	0.01

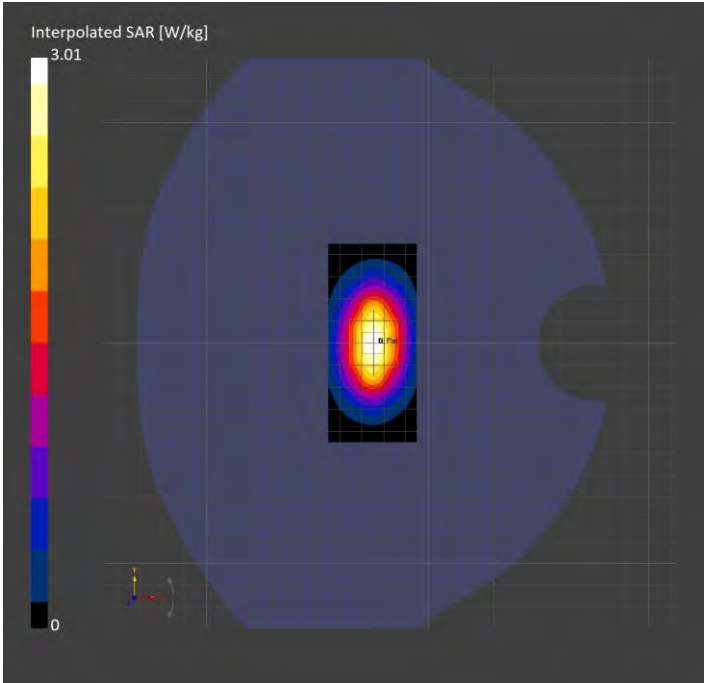

System Performance Check Report for D1900V2 - SN5d163

Exposure Conditions

Frequency [MHz] Channel Number	1900.000 0	TSL Permittivity	41.8
Group UID	CW 0-	TSL Conductivity [S/m]	1.35
Conversion Factor	7.74	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7909 2025-10-14	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1433 2026-02-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		85.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.7

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.92	1.91
psSAR10g [W/Kg]	0.995	1.02
Power Drift [±0.2 dB]	N/A	-0.01

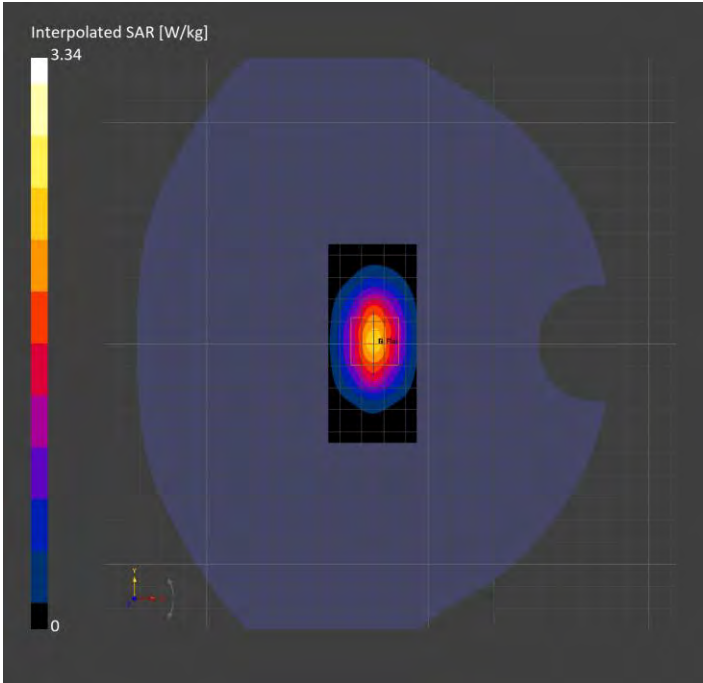

System Performance Check Report for D1750V2 - SN1220

Exposure Conditions

Frequency [MHz] Channel Number	1750.000 0	TSL Permittivity	41.5
Group UID	CW 0-	TSL Conductivity [S/m]	1.27
Conversion Factor	7.94	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7909 2025-10-14	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1433 2026-02-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		85.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		10.8

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.67	1.65
psSAR10g [W/Kg]	0.893	0.903
Power Drift [±0.2 dB]	N/A	-0.10

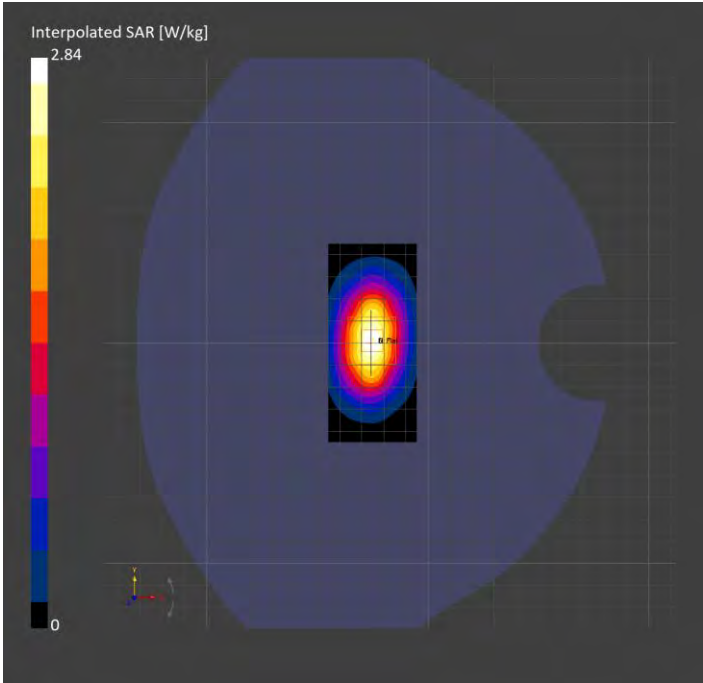

System Performance Check Report for D1750V2 - SN1050

Exposure Conditions

Frequency [MHz] Channel Number	1750.000 0	TSL Permittivity	42.7
Group UID	CW 0-	TSL Conductivity [S/m]	1.28
Conversion Factor	8.36	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7908 2026-02-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1894 2025-11-12	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		83.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		10.8

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.74	1.78
psSAR10g [W/Kg]	0.946	0.970
Power Drift [±0.2 dB]	N/A	-0.01

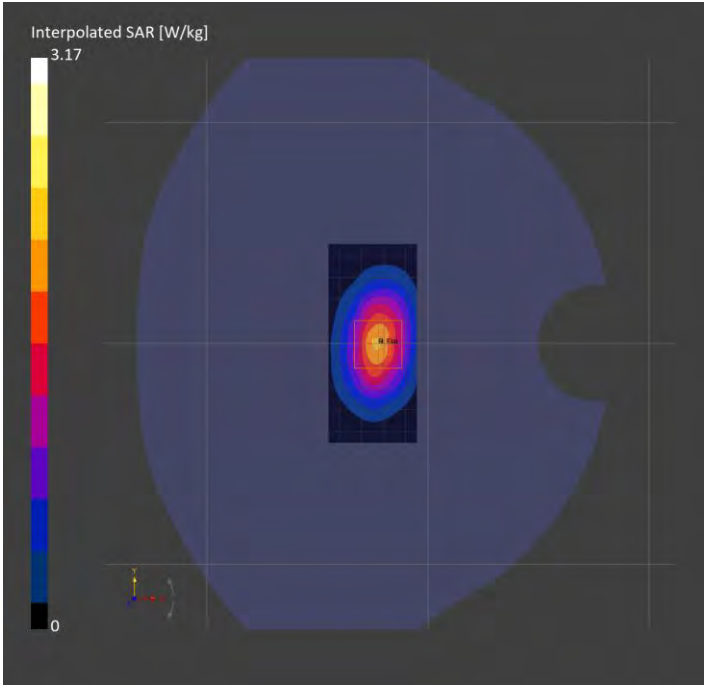

System Performance Check Report for D1750V2 - SN1053

Exposure Conditions

Frequency [MHz] Channel Number	1750.000 0	TSL Permittivity	41.3
Group UID	CW 0-	TSL Conductivity [S/m]	1.26
Conversion Factor	8.36	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7908 2026-02-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1894 2025-11-12	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		83.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.70	1.71
psSAR10g [W/Kg]	0.899	0.932
Power Drift [±0.2 dB]	N/A	-0.08

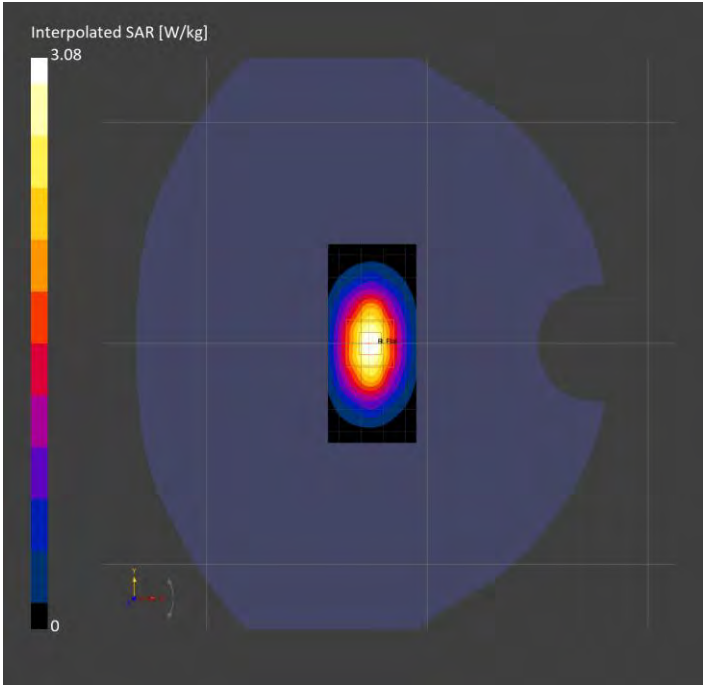

System Performance Check Report for D1900V2 - SN5d140

Exposure Conditions

Frequency [MHz] Channel Number	1900.000 0	TSL Permittivity	42.2
Group UID	CW 0-	TSL Conductivity [S/m]	1.35
Conversion Factor	8.16	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7908 2026-02-16	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1894 2025-11-12	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		81.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.7

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.80	1.86
psSAR10g [W/Kg]	0.931	0.981
Power Drift [±0.2 dB]	N/A	-0.07

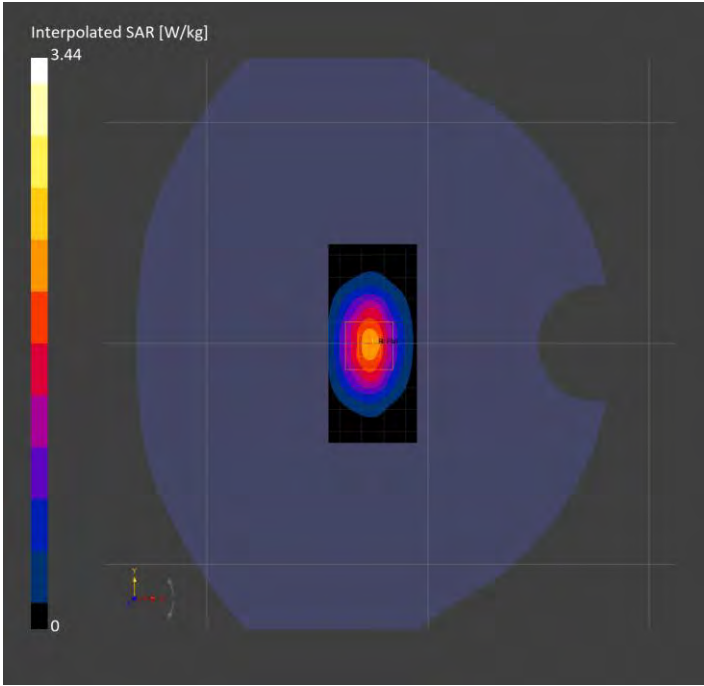

System Performance Check Report for D1750V2 - SN1220

Exposure Conditions

Frequency [MHz] Channel Number	1750.000 0	TSL Permittivity	39.6
Group UID	CW 0-	TSL Conductivity [S/m]	1.27
Conversion Factor	7.89	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7910 2025-10-14	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1239 2026-03-06	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		85.4
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		10.8

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.71	1.69
psSAR10g [W/Kg]	0.916	0.922
Power Drift [±0.2 dB]	N/A	-0.01

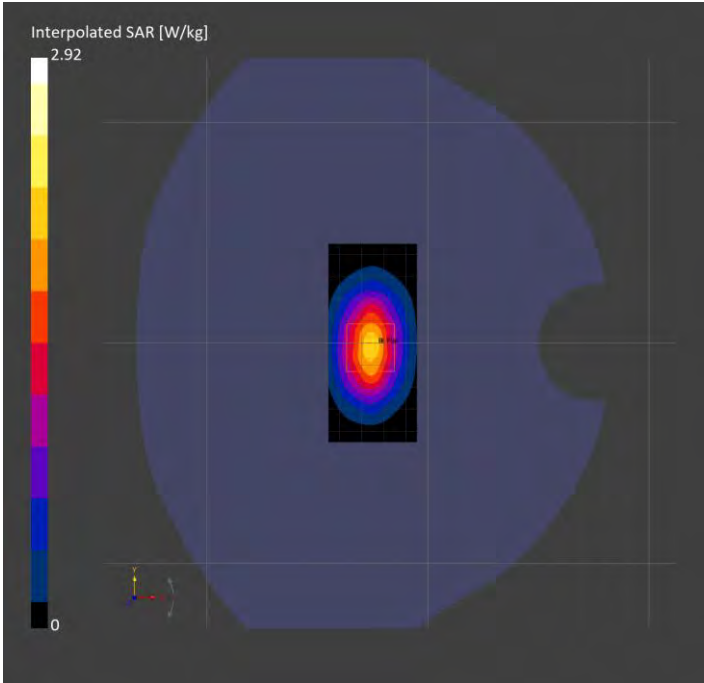

System Performance Check Report for D1750V2 - SN1050

Exposure Conditions

Frequency [MHz] Channel Number	1750.000 0	TSL Permittivity	40.2
Group UID	CW 0-	TSL Conductivity [S/m]	1.28
Conversion Factor	7.89	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7910 2025-10-14	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1239 2026-03-06	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		87.0
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		10.8

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.73	1.74
psSAR10g [W/Kg]	0.927	0.958
Power Drift [±0.2 dB]	N/A	0.01

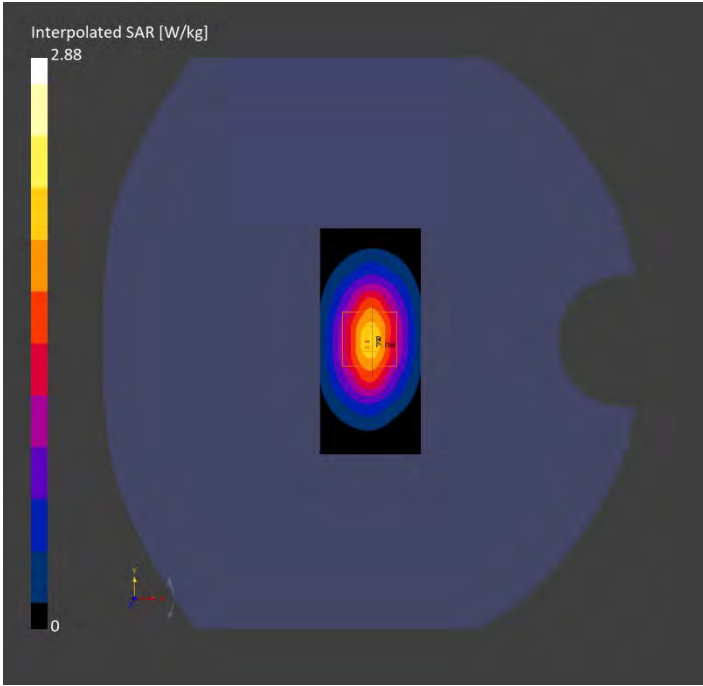

System Performance Check Report for D1900V2 - SN5d140

Exposure Conditions

Frequency [MHz] Channel Number	1900.000 0	TSL Permittivity	40.9
Group UID	CW 0-	TSL Conductivity [S/m]	1.32
Conversion Factor	7.74	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7910 2025-10-14	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1239 2026-03-06	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		82.7
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		10.8

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.84	1.86
psSAR10g [W/Kg]	0.957	0.995
Power Drift [±0.2 dB]	N/A	0.00

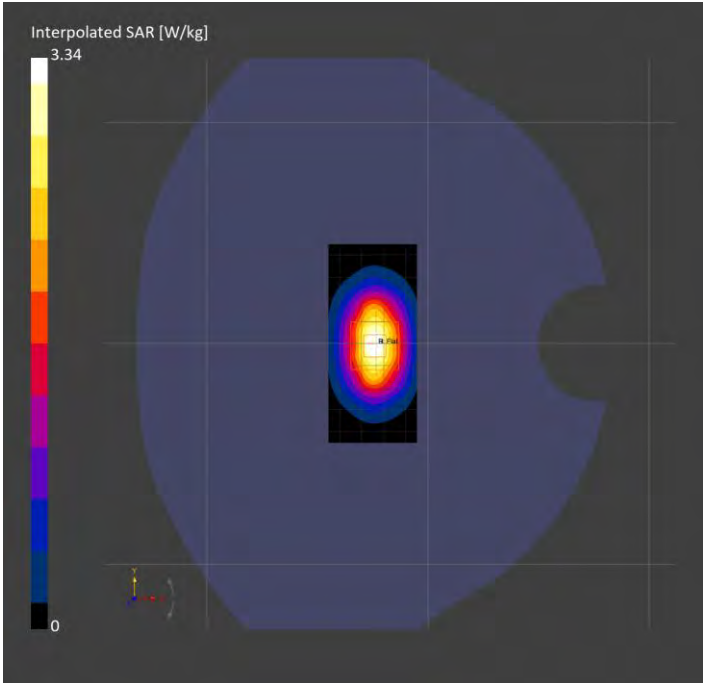

System Performance Check Report for D1750V2 - SN1053

Exposure Conditions

Frequency [MHz] Channel Number	1750.000 0	TSL Permittivity	41.5
Group UID	CW 0-	TSL Conductivity [S/m]	1.28
Conversion Factor	7.89	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7910 2025-10-14	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1239 2026-03-06	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		85.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		10.8

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.68	1.70
psSAR10g [W/Kg]	0.891	0.929
Power Drift [±0.2 dB]	N/A	-0.05

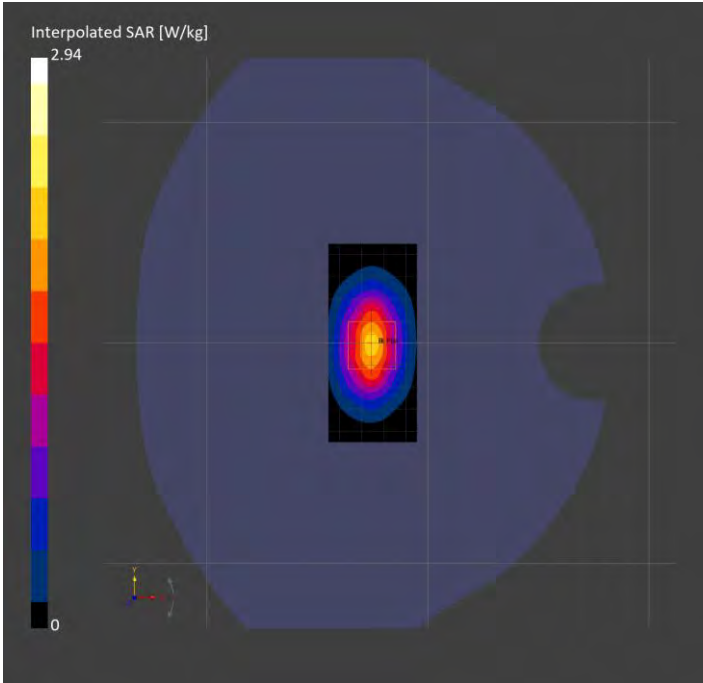

System Performance Check Report for D1900V2 - SN5d163

Exposure Conditions

Frequency [MHz] Channel Number	1900.000 0	TSL Permittivity	41.3
Group UID	CW 0-	TSL Conductivity [S/m]	1.36
Conversion Factor	7.74	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7910 2025-10-14	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1239 2026-03-06	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		83.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.82	1.86
psSAR10g [W/Kg]	0.935	0.989
Power Drift [±0.2 dB]	N/A	-0.07

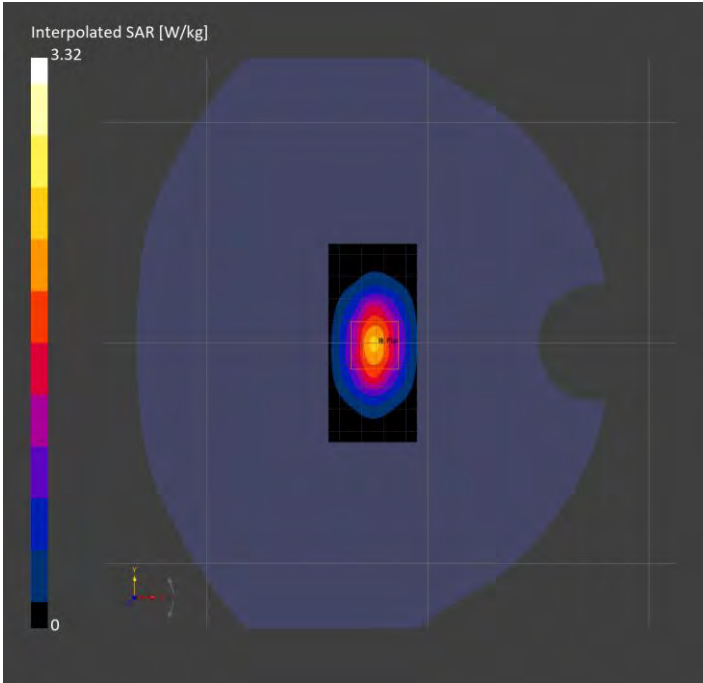

System Performance Check Report for D750V3 - SN1071

Exposure Conditions

Frequency [MHz] Channel Number	750.000 0	TSL Permittivity	43.5
Group UID	CW 0-	TSL Conductivity [S/m]	0.888
Conversion Factor	9.59	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7976 2026-02-18	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1359 2026-01-07	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		88.4
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		21.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.416	0.414
psSAR10g [W/Kg]	0.277	0.276
Power Drift [±0.2 dB]	N/A	0.00

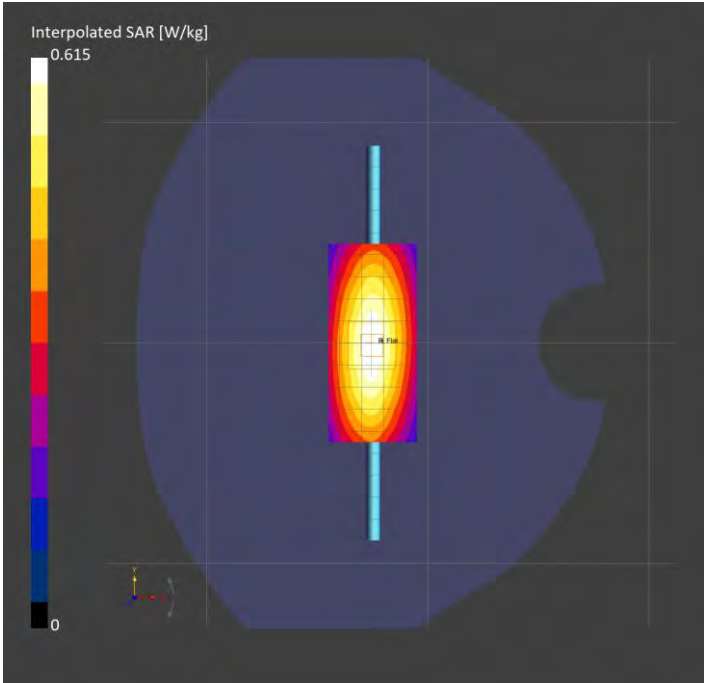

System Performance Check Report for D1750V2 - SN1053

Exposure Conditions

Frequency [MHz] Channel Number	1750.000 0	TSL Permittivity	41.3
Group UID	CW 0-	TSL Conductivity [S/m]	1.36
Conversion Factor	7.95	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7976 2026-02-18	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1359 2026-01-07	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		84.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		10.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.87	1.85
psSAR10g [W/Kg]	0.996	0.993
Power Drift [±0.2 dB]	N/A	0.01

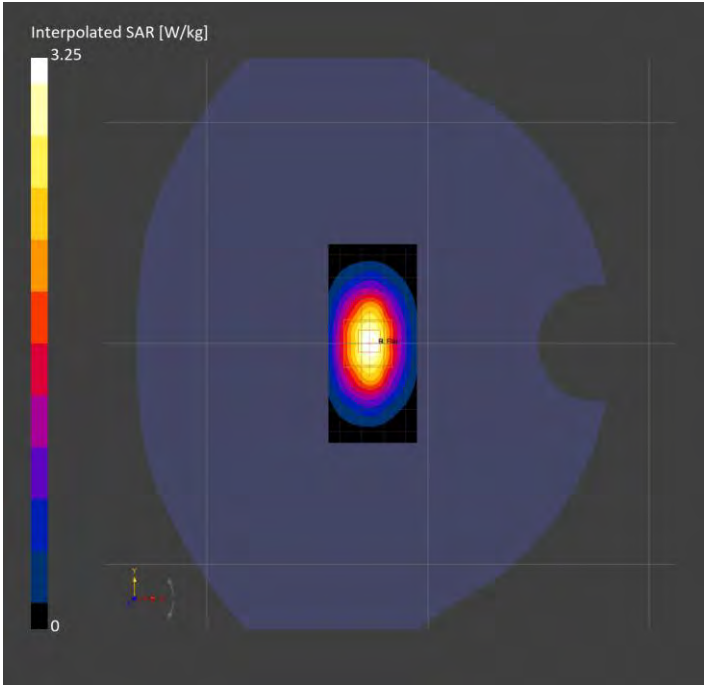

System Performance Check Report for D1900V2 - SN5d163

Exposure Conditions

Frequency [MHz] Channel Number	1900.000 0	TSL Permittivity	41.0
Group UID	CW 0-	TSL Conductivity [S/m]	1.45
Conversion Factor	7.71	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7976 2026-02-18	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1359 2026-01-07	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		84.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.9

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.05	2.01
psSAR10g [W/Kg]	1.05	1.05
Power Drift [±0.2 dB]	N/A	0.01

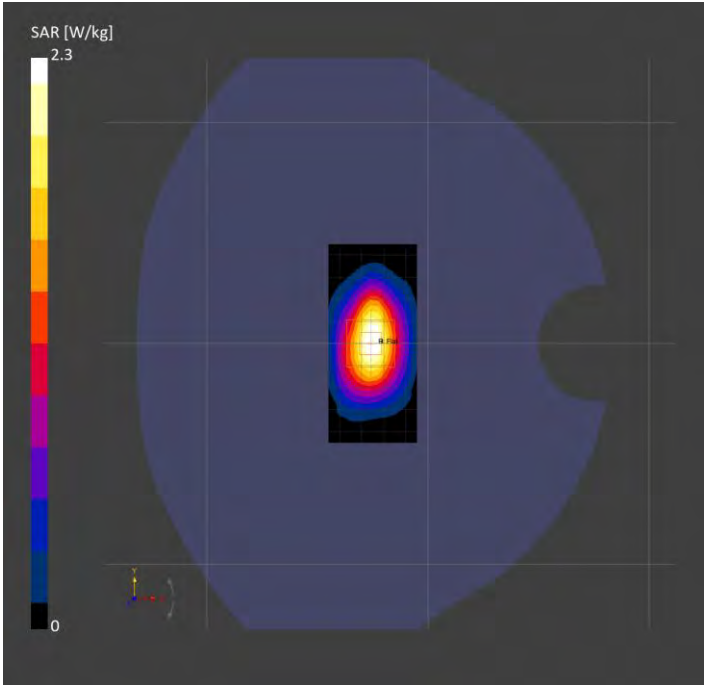

System Performance Check Report for D900V2 - SN1d143

Exposure Conditions

Frequency [MHz] Channel Number	900.000 0	TSL Permittivity	41.3
Group UID	CW 0-	TSL Conductivity [S/m]	0.943
Conversion Factor	9.22	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7976 2026-02-18	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1359 2026-01-07	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		87.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		15.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.506	0.501
psSAR10g [W/Kg]	0.331	0.326
Power Drift [±0.2 dB]	N/A	-0.01

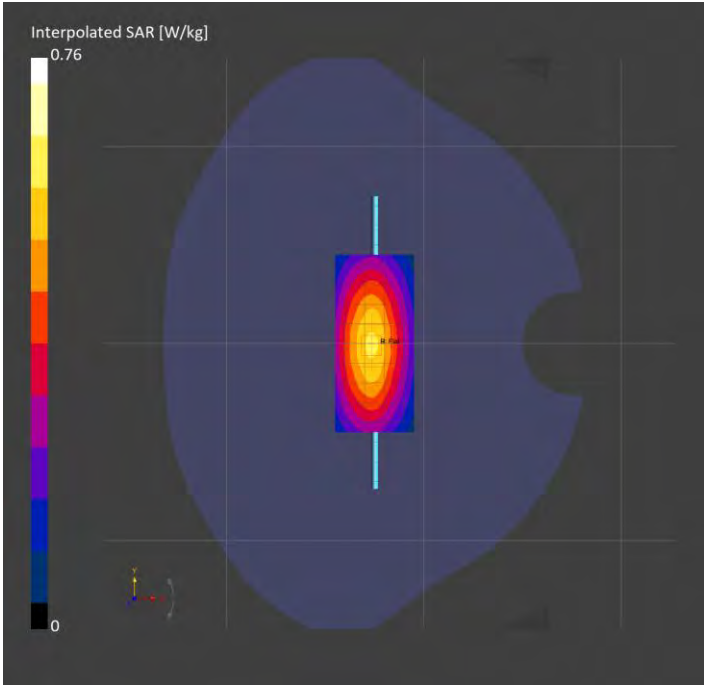

System Performance Check Report for D835V2 - SN4d002

Exposure Conditions

Frequency [MHz] Channel Number	835.000 0	TSL Permittivity	39.7
Group UID	CW 0-	TSL Conductivity [S/m]	0.907
Conversion Factor	9.22	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7976 2026-02-18	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1359 2026-01-07	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		88.0
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		19.7

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.01	1.00
psSAR10g [W/Kg]	0.664	0.655
Power Drift [±0.2 dB]	N/A	-0.01

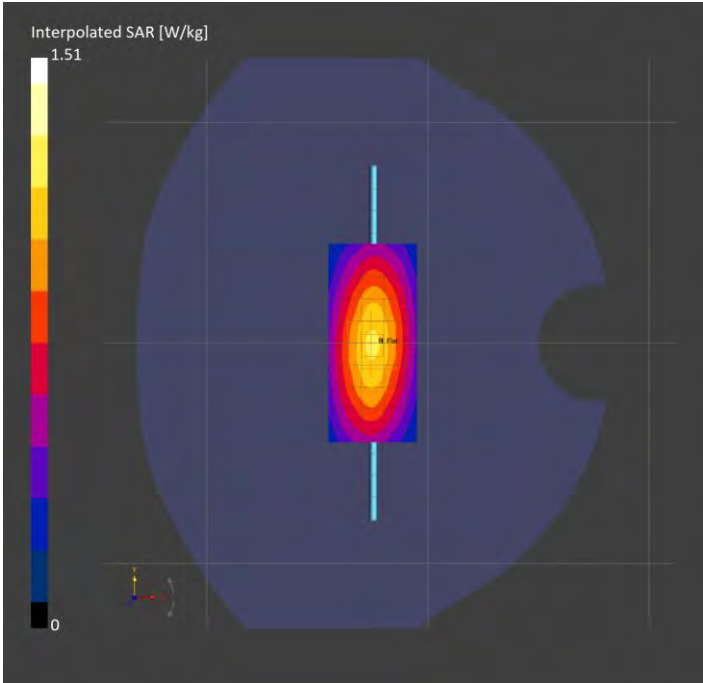

System Performance Check Report for D750V3 - SN1257

Exposure Conditions

Frequency [MHz] Channel Number	750.000 0	TSL Permittivity	43.7
Group UID	CW 0-	TSL Conductivity [S/m]	0.858
Conversion Factor	9.59	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7976 2026-02-18	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1359 2026-01-07	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		87.4
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		19.7

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.402	0.397
psSAR10g [W/Kg]	0.267	0.261
Power Drift [±0.2 dB]	N/A	0.02

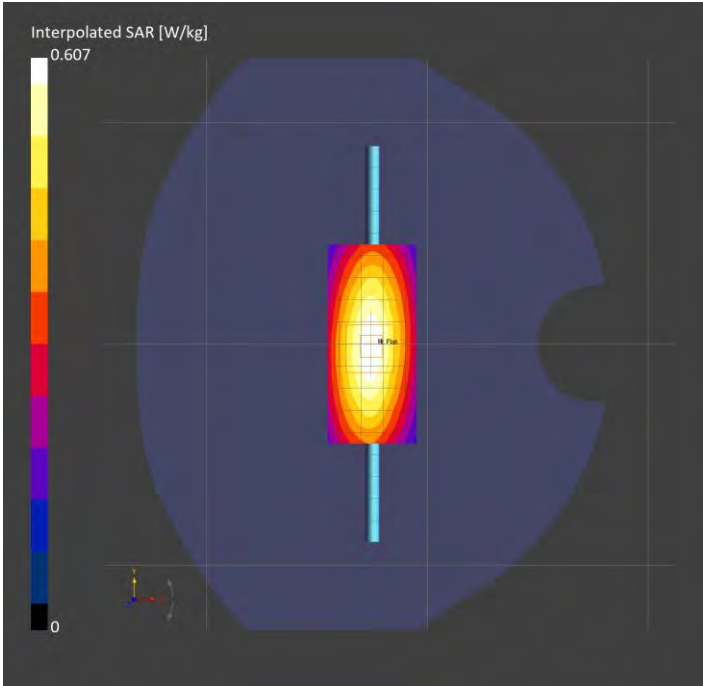

System Performance Check Report for D835V2 - SN4d117

Exposure Conditions

Frequency [MHz] Channel Number	835.000 0	TSL Permittivity	44.1
Group UID	CW 0-	TSL Conductivity [S/m]	0.893
Conversion Factor	9.22	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7976 2026-02-18	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1359 2026-01-07	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		84.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		16.8

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.507	0.513
psSAR10g [W/Kg]	0.334	0.331
Power Drift [±0.2 dB]	N/A	0.05

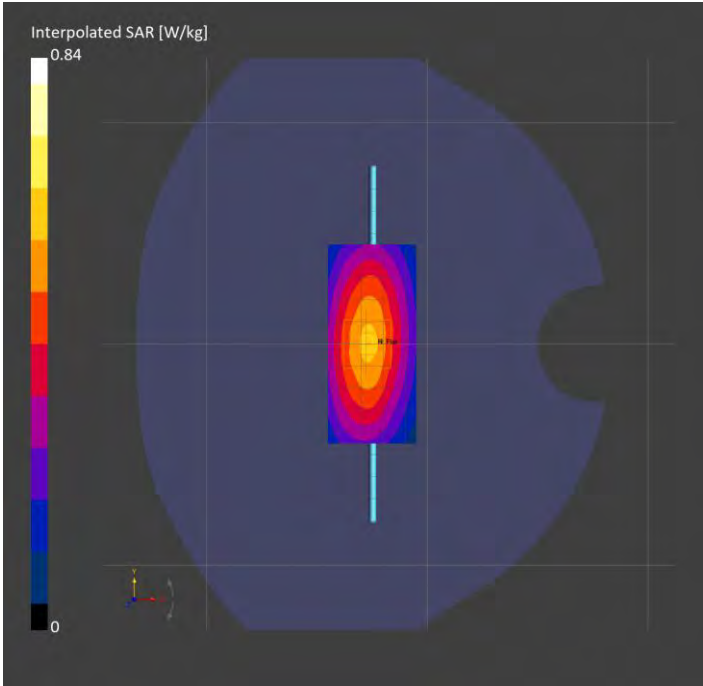

System Performance Check Report for D900V2 - SN1d143

Exposure Conditions

Frequency [MHz] Channel Number	900.000 0	TSL Permittivity	40.2
Group UID	CW 0-	TSL Conductivity [S/m]	0.892
Conversion Factor	9.52	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7589 2026-04-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1619 2026-04-10	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		87.4
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		17.8

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.495	0.493
psSAR10g [W/Kg]	0.323	0.324
Power Drift [±0.2 dB]	-0.07	-0.00

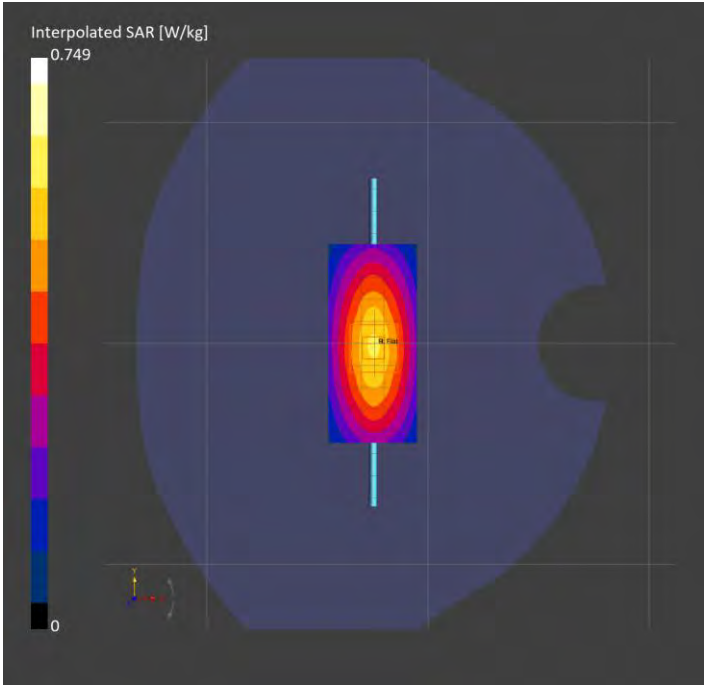

System Performance Check Report for D750V3 - SN1071

Exposure Conditions

Frequency [MHz] Channel Number	750.000 0	TSL Permittivity	39.4
Group UID	CW 0-	TSL Conductivity [S/m]	0.860
Conversion Factor	10.32	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7589 2026-04-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1619 2026-04-10	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		87.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		> 15.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.394	0.393
psSAR10g [W/Kg]	0.263	0.262
Power Drift [±0.2 dB]	-0.01	0.00

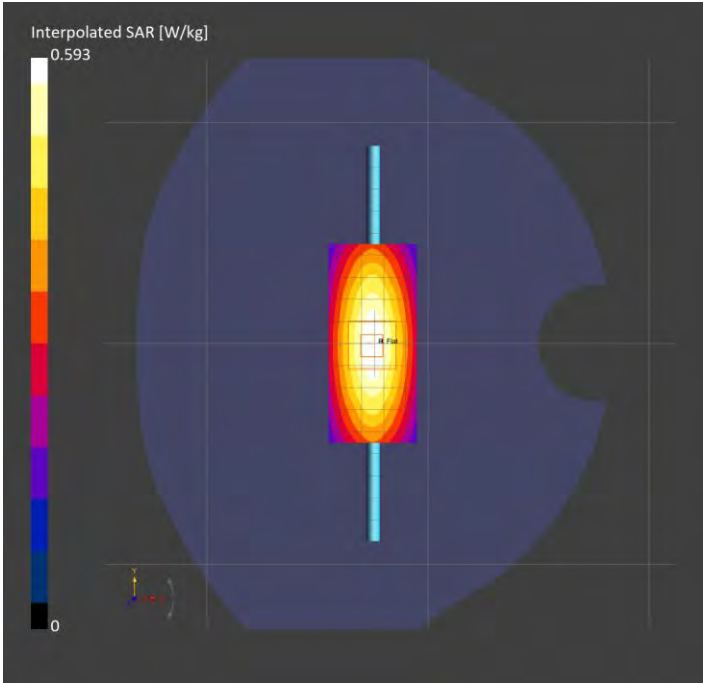

System Performance Check Report for D835V2 - SN4d002

Exposure Conditions

Frequency [MHz] Channel Number	835.000 0	TSL Permittivity	42.1
Group UID	CW 0-	TSL Conductivity [S/m]	0.905
Conversion Factor	9.52	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7589 2026-04-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1619 2026-04-10	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		87.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		19.7

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.500	0.502
psSAR10g [W/Kg]	0.331	0.333
Power Drift [±0.2 dB]	-0.00	-0.00

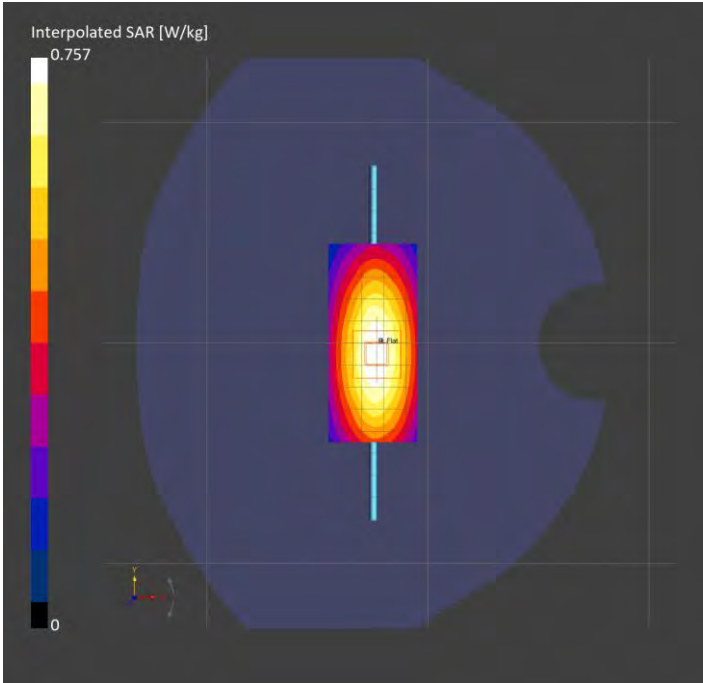

System Performance Check Report for D835V2 - SN4d117

Exposure Conditions

Frequency [MHz] Channel Number	835.000 0	TSL Permittivity	40.9
Group UID	CW 0-	TSL Conductivity [S/m]	0.889
Conversion Factor	9.52	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7589 2026-04-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1619 2026-04-10	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		87.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		> 15.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.515	0.517
psSAR10g [W/Kg]	0.341	0.340
Power Drift [±0.2 dB]	-0.12	-0.00

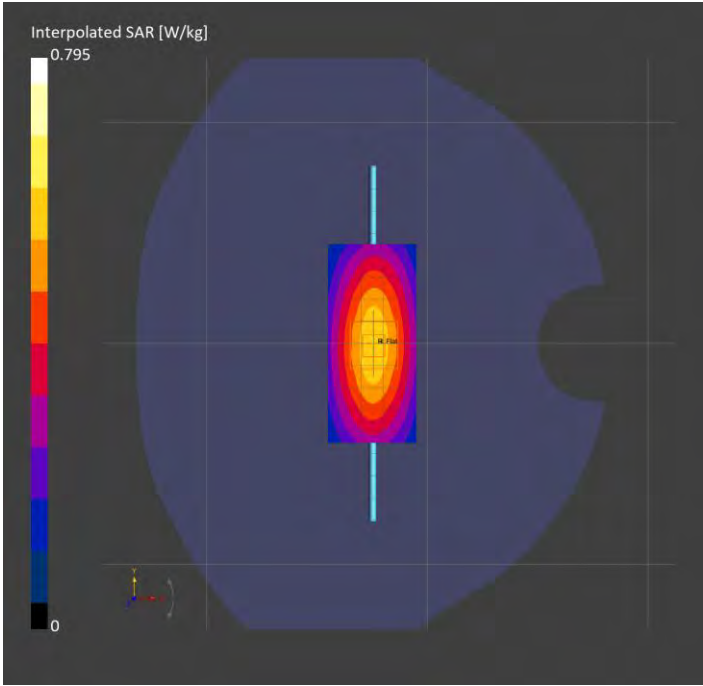

System Performance Check Report for D900V2 - SN1d143

Exposure Conditions

Frequency [MHz] Channel Number	900.000 0	TSL Permittivity	41.5
Group UID	CW 0-	TSL Conductivity [S/m]	0.958
Conversion Factor	9.03	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7975 2026-02-03	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1941 2026-02-03	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		89.0
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		19.7

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.498	0.499
psSAR10g [W/Kg]	0.325	0.324
Power Drift [±0.2 dB]	0.00	0.00

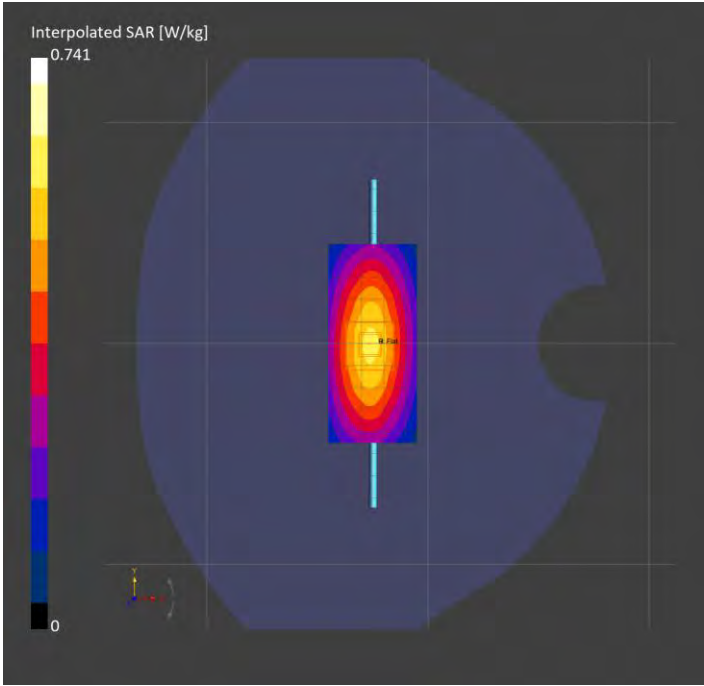

System Performance Check Report for D750V3 - SN1257

Exposure Conditions

Frequency [MHz] Channel Number	750.000 0	TSL Permittivity	39.0
Group UID	CW 0-	TSL Conductivity [S/m]	0.861
Conversion Factor	9.53	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7975 2026-02-03	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1941 2026-02-03	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		87.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		> 15.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.392	0.393
psSAR10g [W/Kg]	0.262	0.257
Power Drift [±0.2 dB]	0.03	0.03

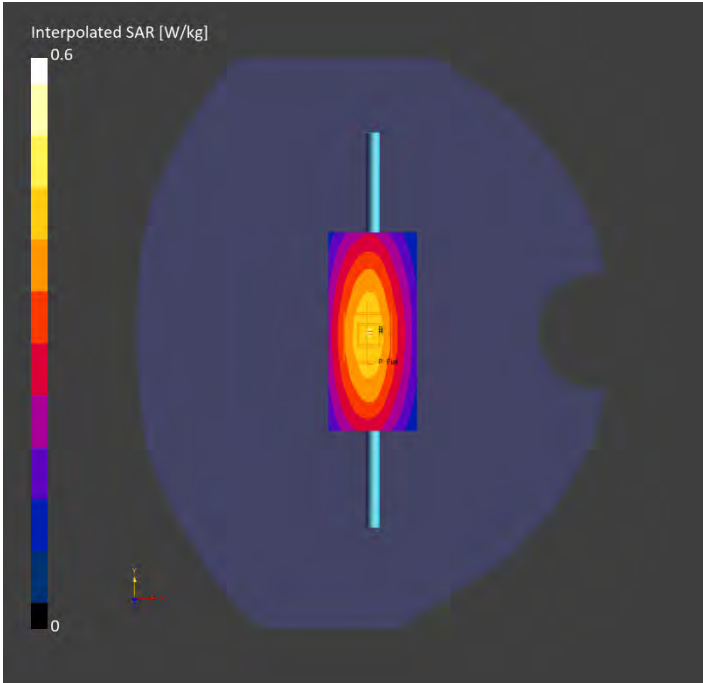

System Performance Check Report for D835V2 - SN4d002

Exposure Conditions

Frequency [MHz] Channel Number	835.000 0	TSL Permittivity	39.5
Group UID	CW 0-	TSL Conductivity [S/m]	0.883
Conversion Factor	9.03	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7975 2026-02-03	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1941 2026-02-03	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		83.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		20.5

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.514	0.520
psSAR10g [W/Kg]	0.338	0.336
Power Drift [±0.2 dB]	-0.03	0.02

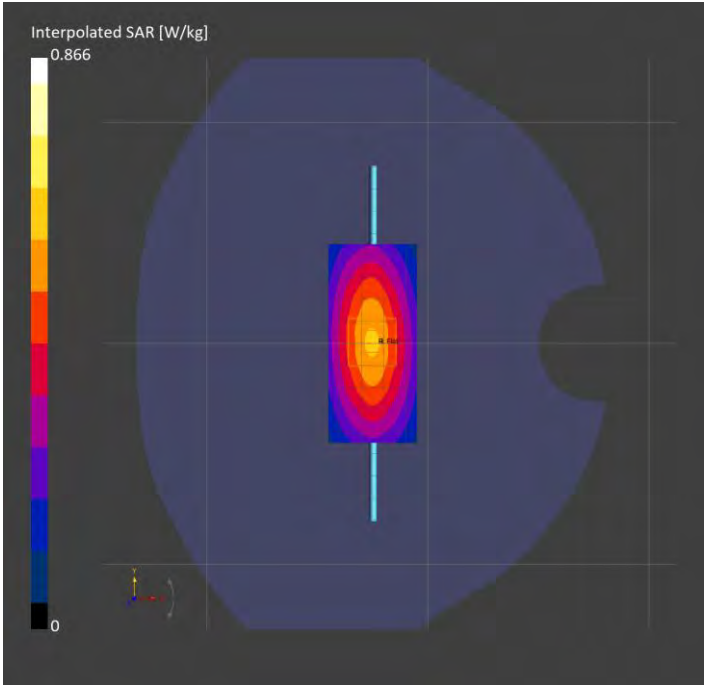

System Performance Check Report for D750V3 - SN1071

Exposure Conditions

Frequency [MHz] Channel Number	750.000 0	TSL Permittivity	39.2
Group UID	CW 0-	TSL Conductivity [S/m]	0.856
Conversion Factor	9.53	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7975 2026-02-03	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1941 2026-02-03	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		88.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		> 15.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.399	0.395
psSAR10g [W/Kg]	0.266	0.263
Power Drift [±0.2 dB]	-0.09	-0.01

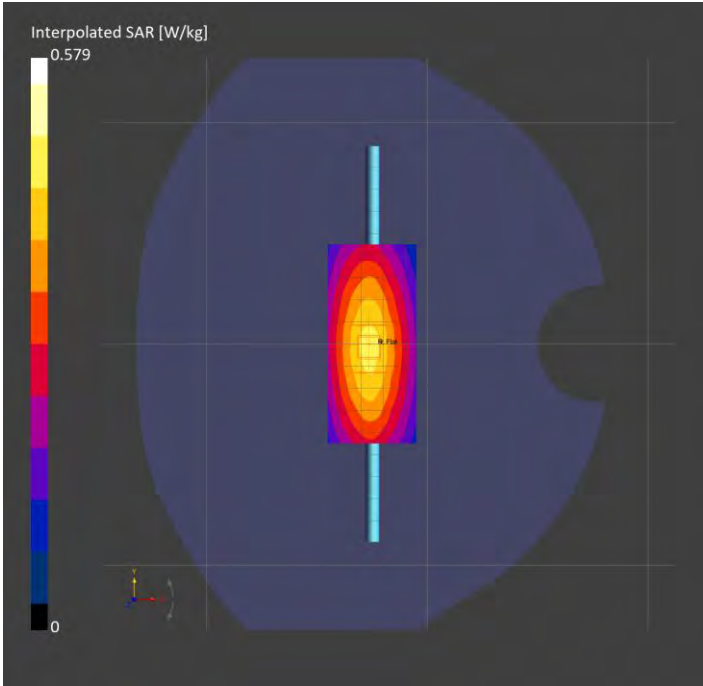

System Performance Check Report for D835V2 - SN4d117

Exposure Conditions

Frequency [MHz] Channel Number	835.000 0	TSL Permittivity	38.6
Group UID	CW 0-	TSL Conductivity [S/m]	0.927
Conversion Factor	9.03	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7975 2026-02-03	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1941 2026-02-03	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		88.7
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		20.5

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.497	0.495
psSAR10g [W/Kg]	0.328	0.323
Power Drift [±0.2 dB]	-0.03	0.00

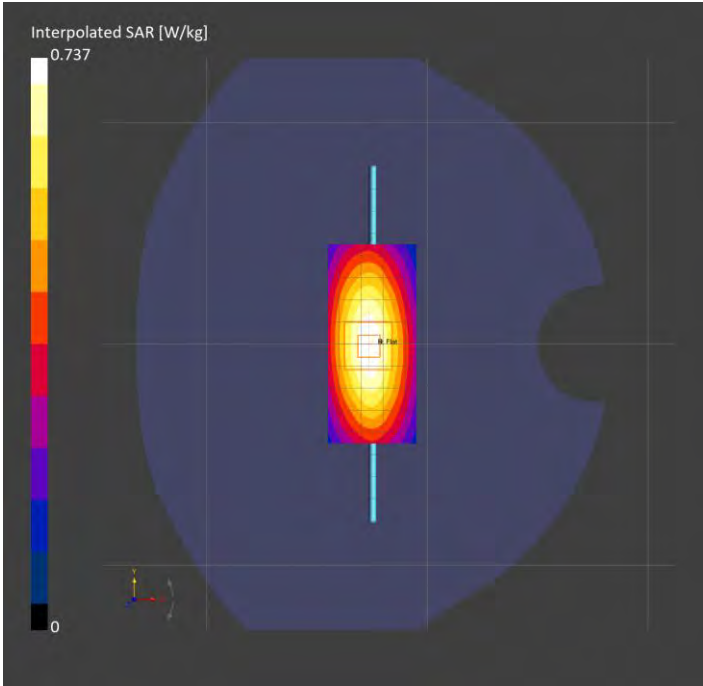

System Performance Check Report for D835V2 - SN4d002

Exposure Conditions

Frequency [MHz] Channel Number	835.000 0	TSL Permittivity	44.1
Group UID	CW 0-	TSL Conductivity [S/m]	0.921
Conversion Factor	9.13	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7974 2026-02-03	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1936 2026-02-03	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		87.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		18.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.506	0.511
psSAR10g [W/Kg]	0.332	0.339
Power Drift [±0.2 dB]	-0.00	0.01

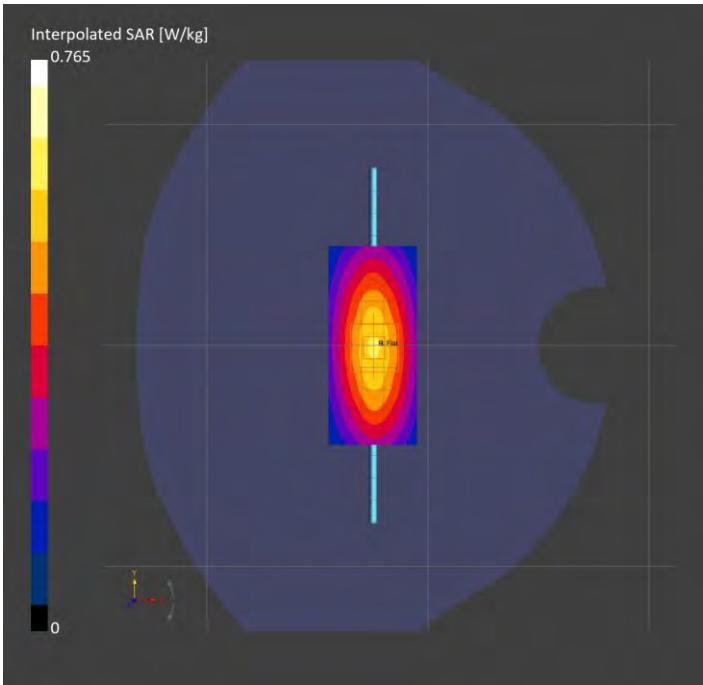

System Performance Check Report for D900V2 - SN1d143

Exposure Conditions

Frequency [MHz] Channel Number	900.000 0	TSL Permittivity	40.2
Group UID	CW 0-	TSL Conductivity [S/m]	0.920
Conversion Factor	9.13	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7974 2026-02-03	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1936 2026-02-03	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		87.7
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		17.8

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.495	0.497
psSAR10g [W/Kg]	0.324	0.323
Power Drift [±0.2 dB]	-0.05	0.01

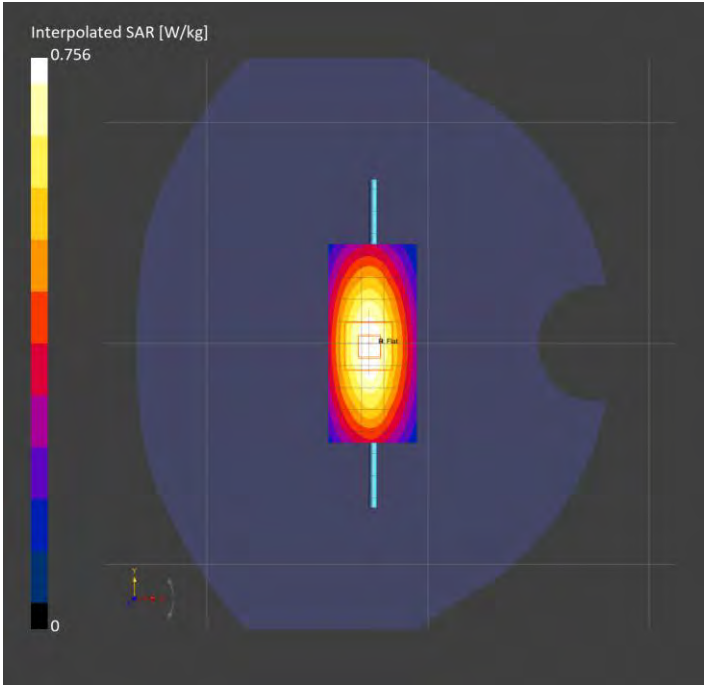

System Performance Check Report for D750V3 - SN1071

Exposure Conditions

Frequency [MHz] Channel Number	750.000 0	TSL Permittivity	40.7
Group UID	CW 0-	TSL Conductivity [S/m]	0.861
Conversion Factor	9.6	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7974 2026-02-03	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1936 2026-02-03	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		86.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		> 15.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.387	0.390
psSAR10g [W/Kg]	0.257	0.256
Power Drift [±0.2 dB]	0.00	0.02

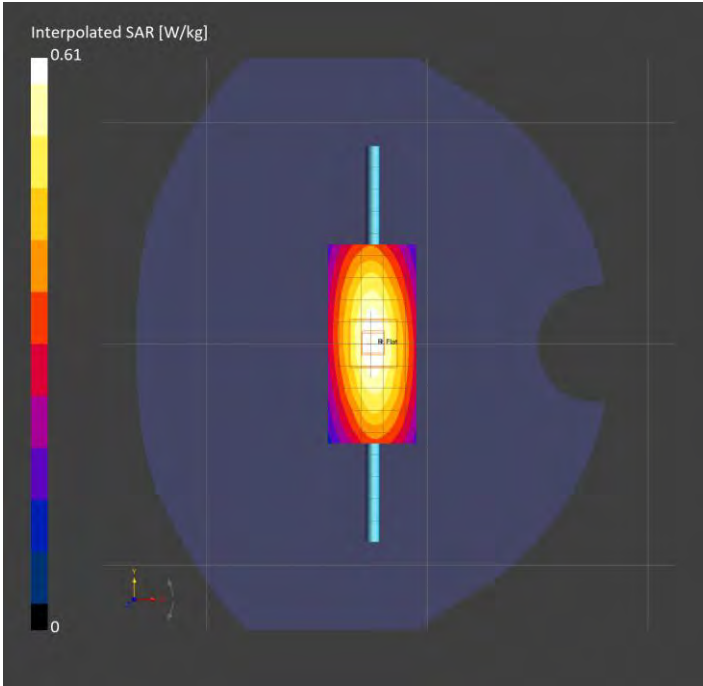

System Performance Check Report for D835V2 - SN4d117

Exposure Conditions

Frequency [MHz] Channel Number	835.000 0	TSL Permittivity	42.5
Group UID	CW 0-	TSL Conductivity [S/m]	0.904
Conversion Factor	9.13	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7974 2026-02-03	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1936 2026-02-03	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		87.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		20.5

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.508	0.508
psSAR10g [W/Kg]	0.334	0.335
Power Drift [±0.2 dB]	0.00	0.01

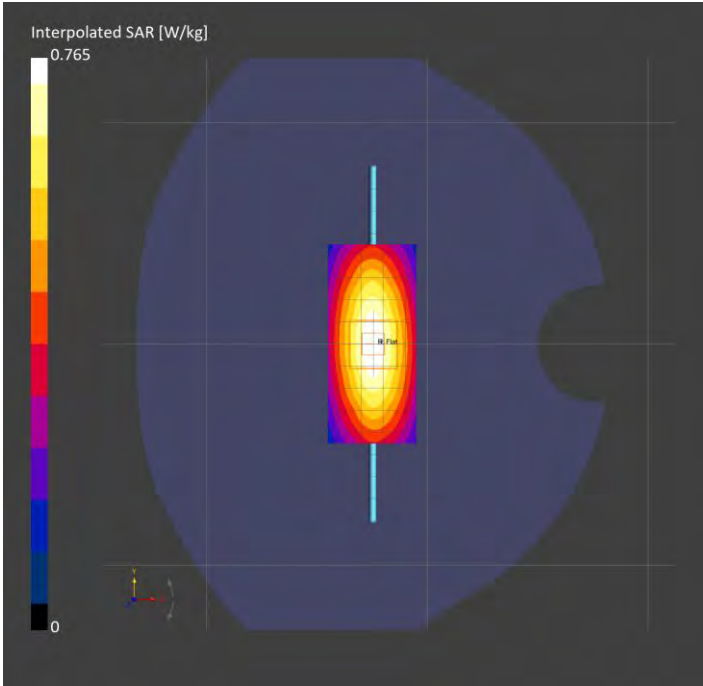

System Performance Check Report for D750V3 - SN1257

Exposure Conditions

Frequency [MHz] Channel Number	750.000 0	TSL Permittivity	39.9
Group UID	CW 0-	TSL Conductivity [S/m]	0.859
Conversion Factor	9.6	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7974 2026-02-03	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1936 2026-02-03	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		84.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		> 15.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.388	0.393
psSAR10g [W/Kg]	0.260	0.260
Power Drift [±0.2 dB]	0.01	-0.00

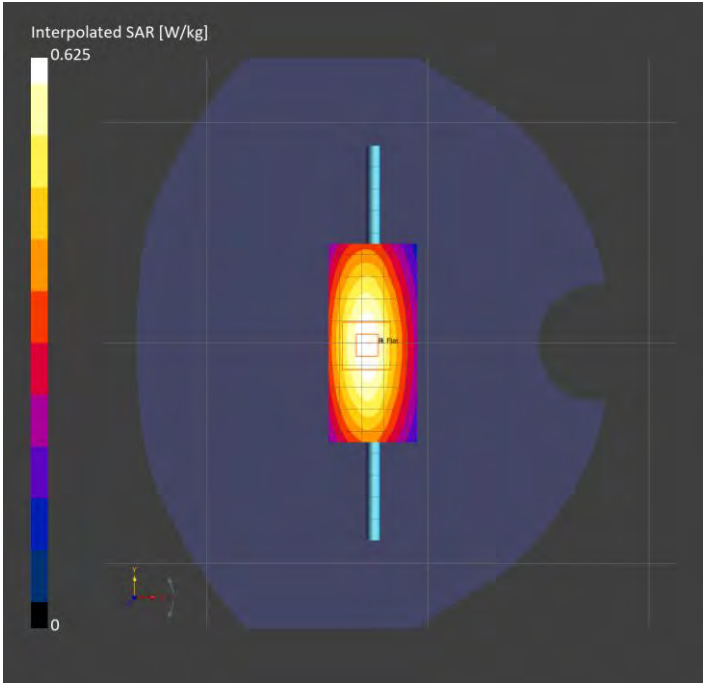

System Performance Check Report for D835V2 - SN4d002

Exposure Conditions

Frequency [MHz] Channel Number	835.000 0	TSL Permittivity	44.1
Group UID	CW 0-	TSL Conductivity [S/m]	0.918
Conversion Factor	9.54	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7913 2025-11-07	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn509 2025-08-07	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		88.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		19.6

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.487	0.488
psSAR10g [W/Kg]	0.320	0.323
Power Drift [±0.2 dB]	0.00	-0.00

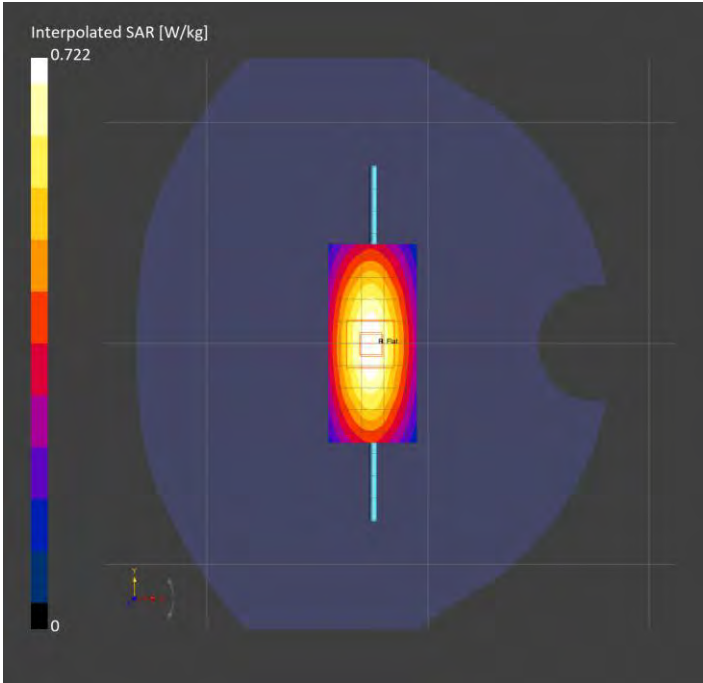

System Performance Check Report for D750V3 - SN1071

Exposure Conditions

Frequency [MHz] Channel Number	750.000 0	TSL Permittivity	43.1
Group UID	CW 0-	TSL Conductivity [S/m]	0.859
Conversion Factor	9.91	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7913 2025-11-07	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn509 2025-08-07	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		88.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		> 15.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.387	0.390
psSAR10g [W/Kg]	0.259	0.259
Power Drift [±0.2 dB]	0.00	0.01

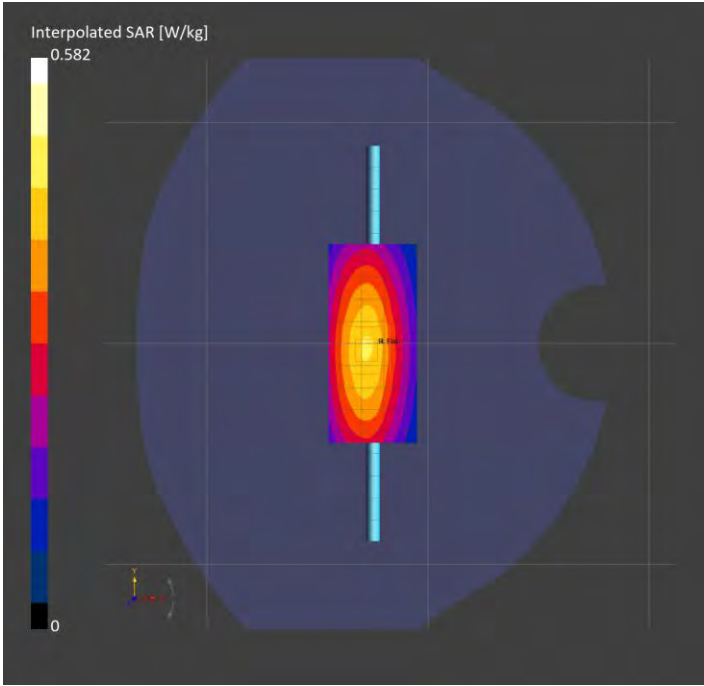

System Performance Check Report for D750V3 - SN1257

Exposure Conditions

Frequency [MHz] Channel Number	750.000 0	TSL Permittivity	40.3
Group UID	CW 0-	TSL Conductivity [S/m]	0.869
Conversion Factor	9.91	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7913 2025-11-07	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn509 2025-08-07	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		89.4
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		> 15.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.395	0.392
psSAR10g [W/Kg]	0.263	0.259
Power Drift [±0.2 dB]	-0.01	0.01

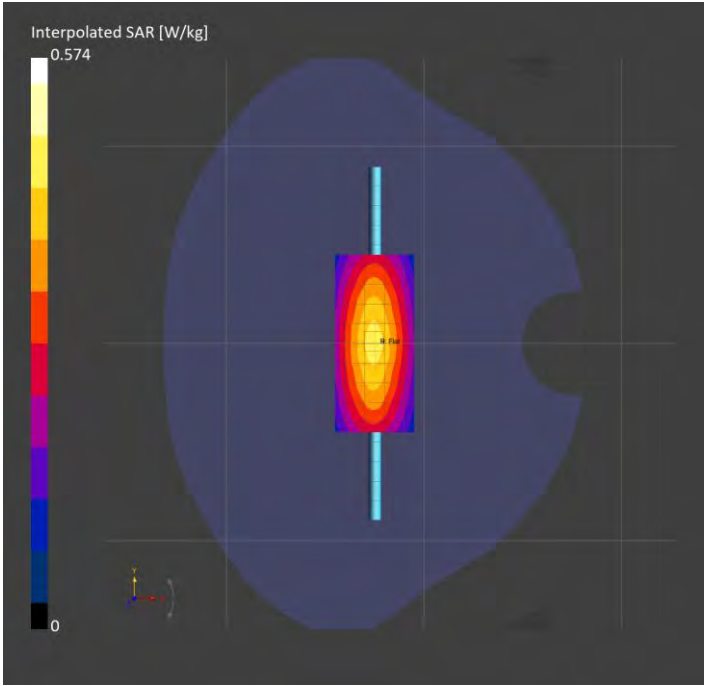

System Performance Check Report for D835V2 - SN4d117

Exposure Conditions

Frequency [MHz] Channel Number	835.000 0	TSL Permittivity	41.4
Group UID	CW 0-	TSL Conductivity [S/m]	0.893
Conversion Factor	9.54	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7913 2025-11-07	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn509 2025-08-07	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		89.0
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		20.5

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.444	0.442
psSAR10g [W/Kg]	0.293	0.290
Power Drift [±0.2 dB]	0.01	0.01

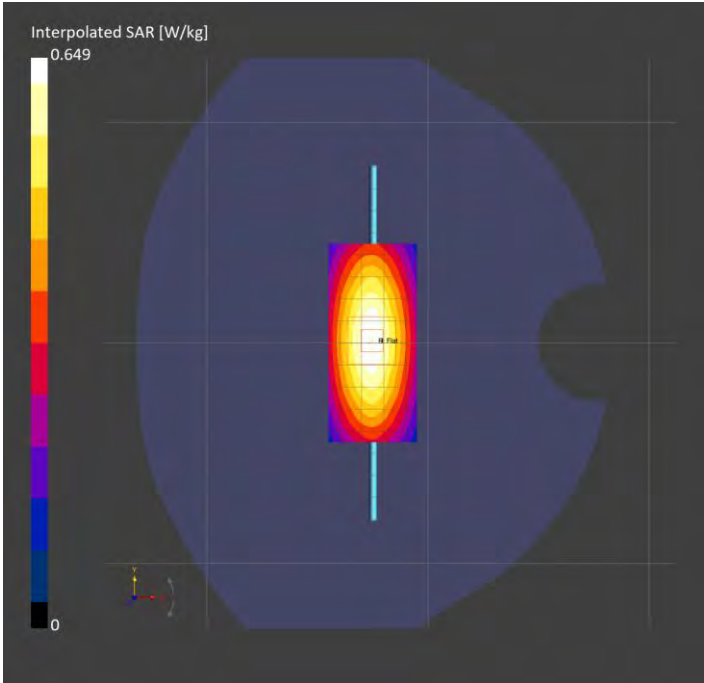

System Performance Check Report for D5GHzV2 - SN1168

Exposure Conditions

Frequency [MHz] Channel Number	5600.000 0	TSL Permittivity	33.8
Group UID	CW 0-	TSL Conductivity [S/m]	4.78
Conversion Factor	4.81	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7820 2026-05-05	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1797 2026-04-27	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	32.0 x 32.0 x 22.9
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		60.4
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.2

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.43	3.81
psSAR10g [W/Kg]	0.974	1.08
Power Drift [±0.2 dB]	-0.00	0.02

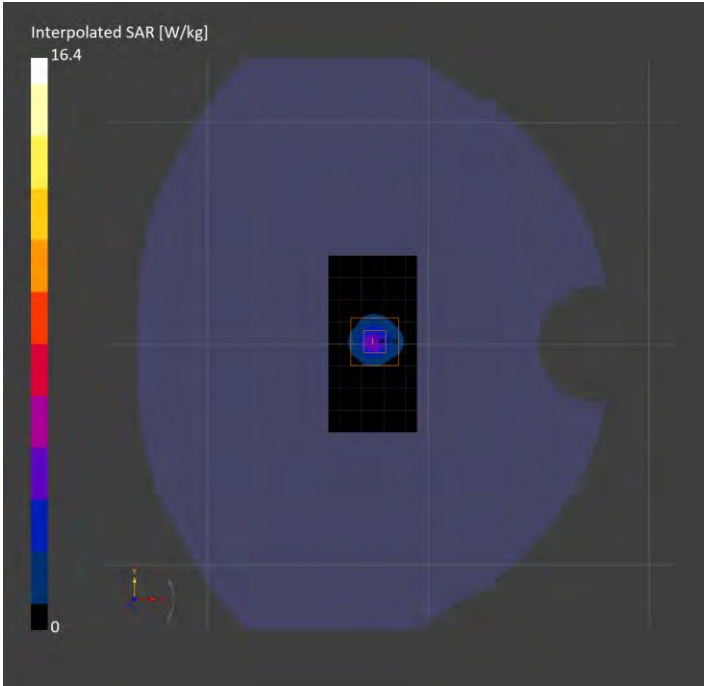

System Performance Check Report for D3700V2 - SN1099

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	39.8
Group UID	CW 0-	TSL Conductivity [S/m]	2.90
Conversion Factor	6.31	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3992 2025-09-02	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1655 2025-08-27	TSL Type	DAKS 3.5 Head 20.8 deg.C 2026-May-14 19_55_47
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		74.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		7.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.04	3.02
psSAR10g [W/Kg]	1.16	1.11
Power Drift [±0.2 dB]	0.01	-0.01

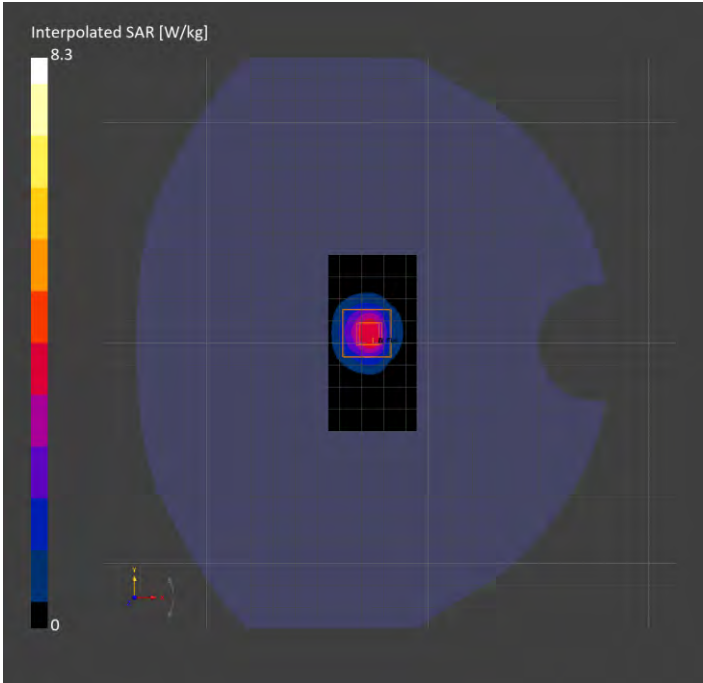

System Performance Check Report for D2300V2 - SN1051

Exposure Conditions

Frequency [MHz] Channel Number	2300.000 0	TSL Permittivity	40.8
Group UID	CW 0-	TSL Conductivity [S/m]	1.69
Conversion Factor	6.84	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3992 2025-09-02	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1655 2025-08-27	TSL Type	DAKS 3.5 Head 20.5 deg.C 2026-May-30 09_45_35
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		82.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		10.1

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	4.32	4.41
psSAR10g [W/Kg]	2.17	2.20
Power Drift [±0.2 dB]	0.01	-0.00

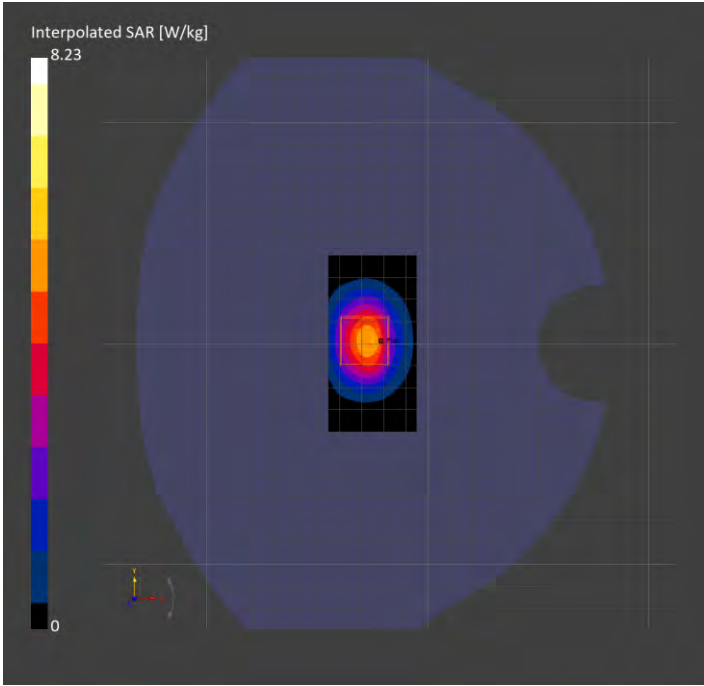

System Performance Check Report for D3500V2 - SN1038

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	38.7
Group UID	CW 0-	TSL Conductivity [S/m]	2.73
Conversion Factor	6.34	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3992 2025-09-02	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1655 2025-08-27	TSL Type	DAKS 3.5 Head 20.5 deg.C 2026-May-30 09_45_35
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		76.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.10	5.97
psSAR10g [W/Kg]	2.41	2.34
Power Drift [±0.2 dB]	-0.02	0.01

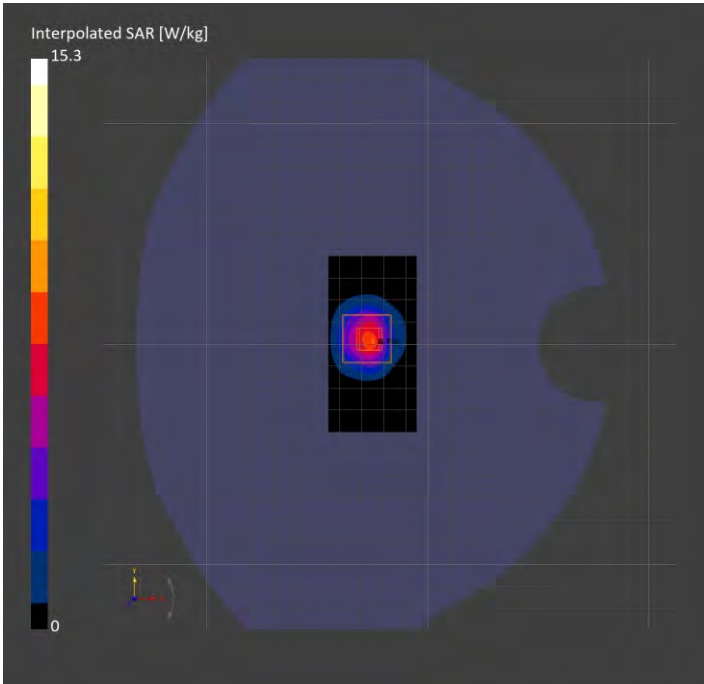

System Performance Check Report for D2600V2 - SN1183

Exposure Conditions

Frequency [MHz] Channel Number	2600.000 0	TSL Permittivity	38.5
Group UID	CW 0-	TSL Conductivity [S/m]	1.96
Conversion Factor	6.55	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3992 2025-09-02	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1655 2025-08-27	TSL Type	DAKS 3.5 Head 20.6 deg.C 2026-Jun-02 04_28_58
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		80.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	6.21	6.05
psSAR10g [W/Kg]	2.81	2.74
Power Drift [±0.2 dB]	0.01	0.03

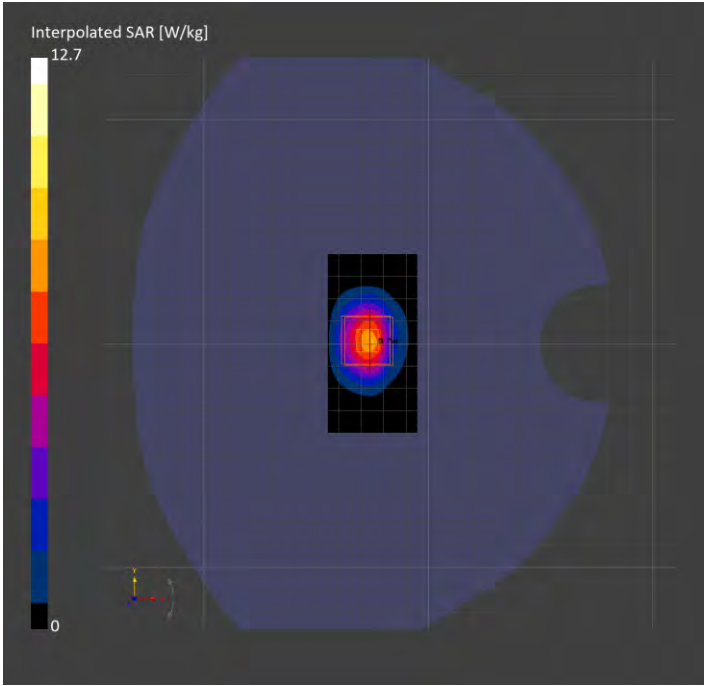

System Performance Check Report for D3900V2 - SN1053

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	36.7
Group UID	CW 0-	TSL Conductivity [S/m]	3.15
Conversion Factor	6.24	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3992 2025-09-02	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1655 2025-08-27	TSL Type	DAKS 3.5 Head 21.8 deg.C 2026-Jun-09 03_19_28
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		73.7
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	7.26	7.21
psSAR10g [W/Kg]	2.62	2.59
Power Drift [±0.2 dB]	0.01	-0.03

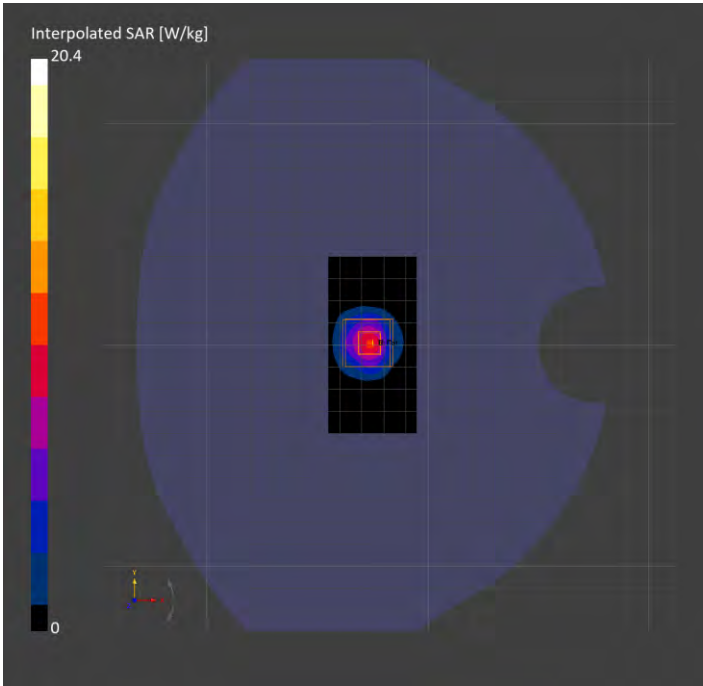

System Performance Check Report for D2600V2 - SN1183

Exposure Conditions

Frequency [MHz] Channel Number	2600.000 0	TSL Permittivity	39.6
Group UID	CW 0-	TSL Conductivity [S/m]	1.90
Conversion Factor	7.54	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3988 2025-08-29	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1765 2025-08-11	TSL Type	DAKS 3.5 Head 18.1 deg.C 2026-May-20 01_14_16
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		78.4
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.61	2.67
psSAR10g [W/Kg]	1.18	1.20
Power Drift [±0.2 dB]	-0.02	-0.01

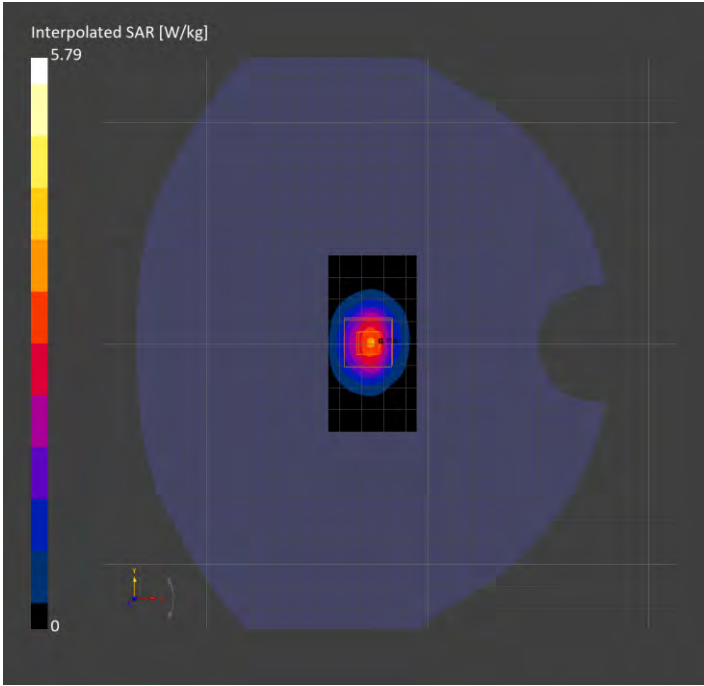

System Performance Check Report for D2300V2 - SN1051

Exposure Conditions

Frequency [MHz] Channel Number	2300.000 0	TSL Permittivity	39.3
Group UID	CW 0-	TSL Conductivity [S/m]	1.65
Conversion Factor	7.29	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3988 2025-08-29	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1765 2025-08-11	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		81.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.9

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	4.22	4.43
psSAR10g [W/Kg]	2.05	2.18
Power Drift [±0.2 dB]	-0.06	-0.02

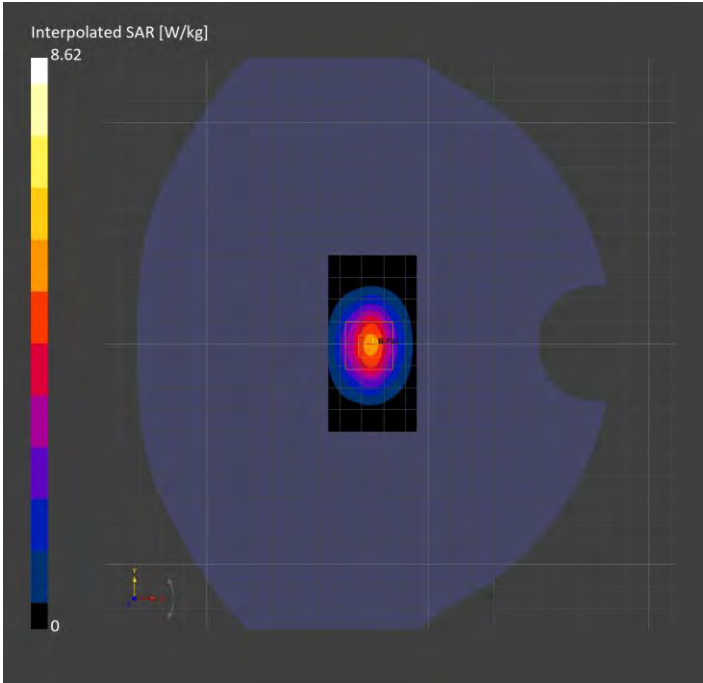

System Performance Check Report for D900V2 - SN1d083

Exposure Conditions

Frequency [MHz] Channel Number	900.000 0	TSL Permittivity	38.6
Group UID	CW 0-	TSL Conductivity [S/m]	0.880
Conversion Factor	9.2	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3988 2025-08-29	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1765 2025-08-11	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		83.6
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		13.5

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.602	0.611
psSAR10g [W/Kg]	0.387	0.384
Power Drift [±0.2 dB]	-0.00	0.01

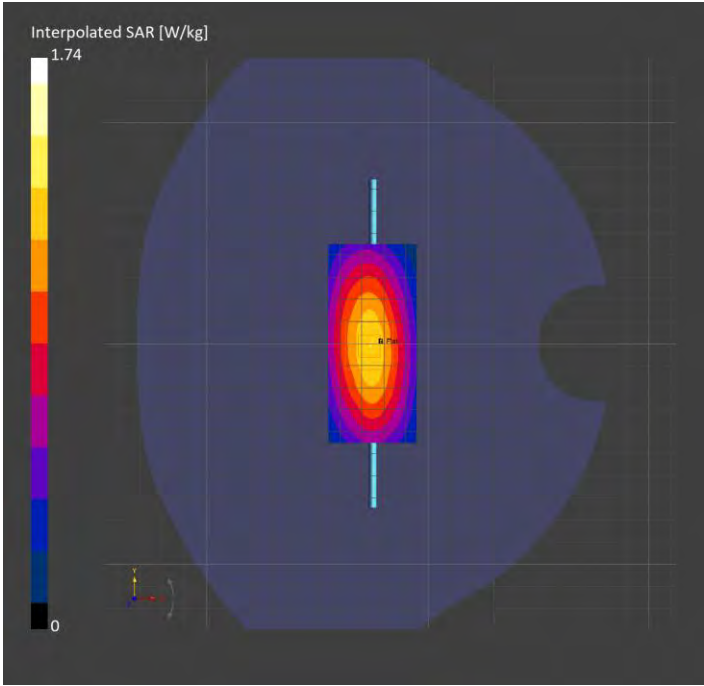

System Performance Check Report for D2600V2 - SN1183

Exposure Conditions

Frequency [MHz] Channel Number	2600.000 0	TSL Permittivity	40.2
Group UID	CW 0-	TSL Conductivity [S/m]	1.89
Conversion Factor	6.63	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3756 2025-09-02	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1608 2025-08-19	TSL Type	DAKS 3.5 Head 18.2 deg.C 2026-May-14 03_34_09
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		81.7
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.56	2.58
psSAR10g [W/Kg]	1.15	1.19
Power Drift [±0.2 dB]	0.01	-0.01

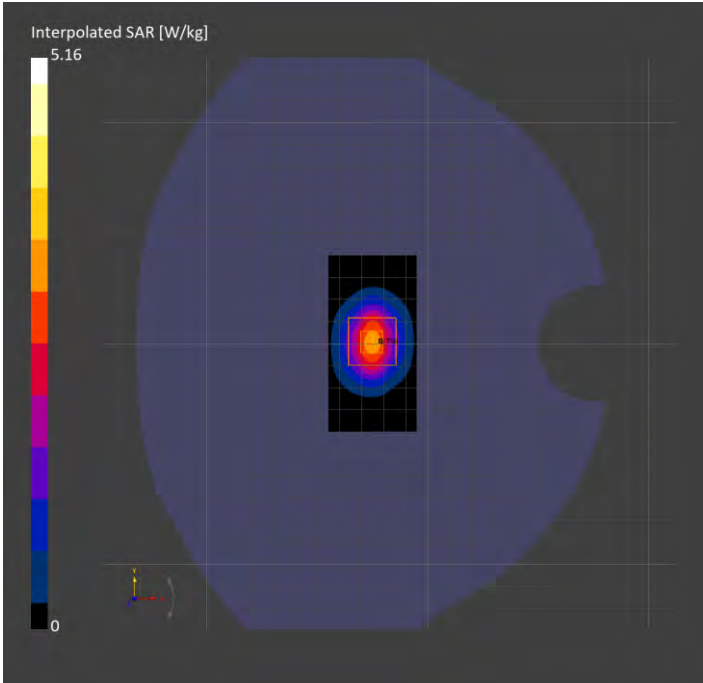

System Performance Check Report for D2300V2 - SN1051

Exposure Conditions

Frequency [MHz] Channel Number	2300.000 0	TSL Permittivity	41.0
Group UID	CW 0-	TSL Conductivity [S/m]	1.71
Conversion Factor	6.89	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3756 2025-09-02	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1608 2025-08-19	TSL Type	DAKS 3.5 Head 20.5 deg.C 2026-May-30 08_05_21
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		83.6
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.5

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	4.31	4.43
psSAR10g [W/Kg]	2.08	2.21
Power Drift [±0.2 dB]	-0.00	0.02

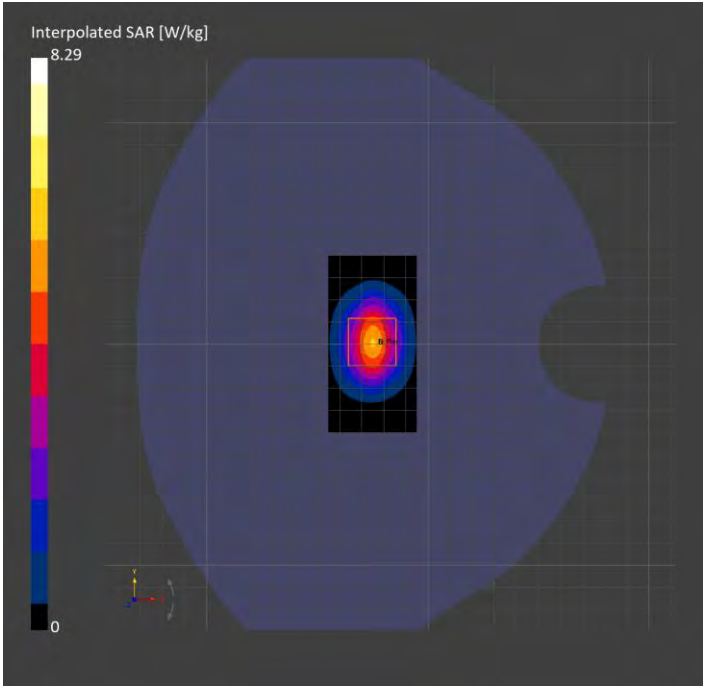

System Performance Check Report for D3500V2 - SN1038

Exposure Conditions

Frequency [MHz] Channel Number	3500.000 0	TSL Permittivity	38.9
Group UID	CW 0-	TSL Conductivity [S/m]	2.74
Conversion Factor	6.21	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3756 2025-09-02	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1608 2025-08-19	TSL Type	DAKS 3.5 Head 20.5 deg.C 2026-May-30 08_05_21
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		78.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.69	5.95
psSAR10g [W/Kg]	2.19	2.33
Power Drift [±0.2 dB]	-0.06	-0.00

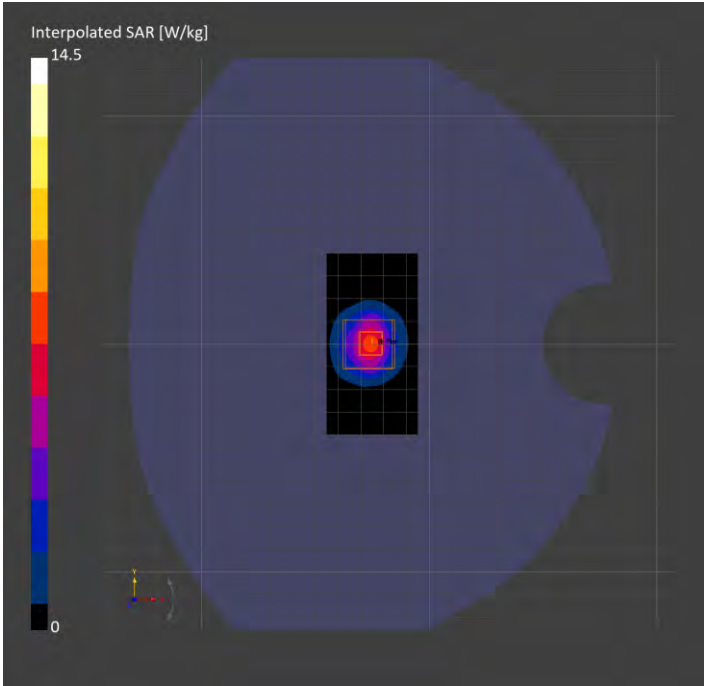

System Performance Check Report for D3700V2 - SN1099

Exposure Conditions

Frequency [MHz] Channel Number	3700.000 0	TSL Permittivity	38.6
Group UID	CW 0-	TSL Conductivity [S/m]	2.91
Conversion Factor	6.18	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3756 2025-09-02	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1608 2025-08-19	TSL Type	DAKS 3.5 Head 20.5 deg.C 2026-May-30 08_05_21
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		76.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.0

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.93	6.22
psSAR10g [W/Kg]	2.20	2.36
Power Drift [±0.2 dB]	-0.05	0.01

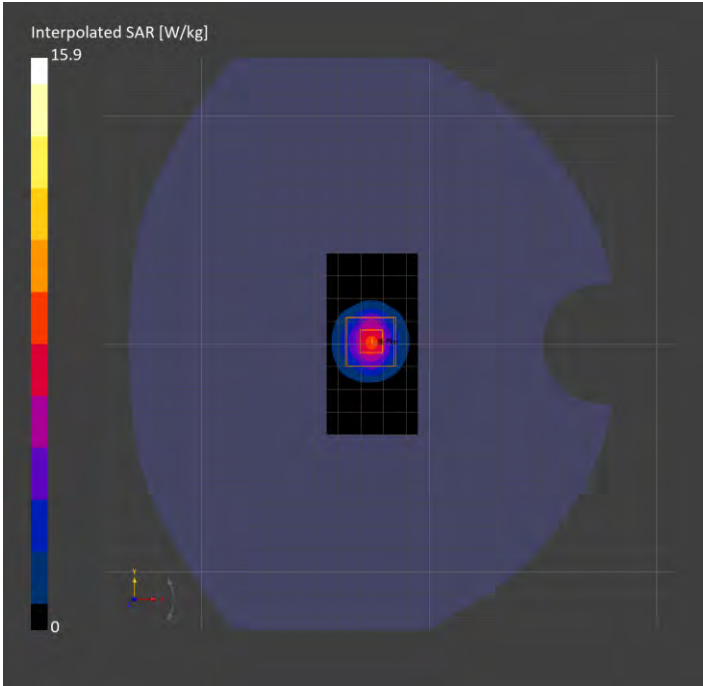

System Performance Check Report for D3900V2 - SN1053

Exposure Conditions

Frequency [MHz] Channel Number	3900.000 0	TSL Permittivity	38.4
Group UID	CW 0-	TSL Conductivity [S/m]	3.11
Conversion Factor	6.12	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3756 2025-09-02	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1608 2025-08-19	TSL Type	DAKS 3.5 Head 20.5 deg.C 2026-May-30 08_05_21
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 29.1
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		76.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		8.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.85	6.22
psSAR10g [W/Kg]	2.07	2.26
Power Drift [±0.2 dB]	-0.09	-0.03

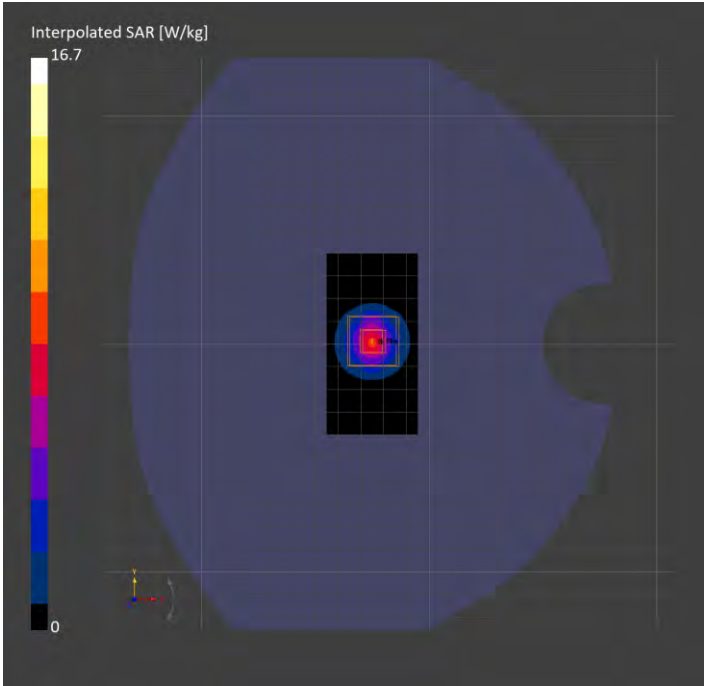

System Performance Check Report for D2300V2 - SN1051

Exposure Conditions

Frequency [MHz] Channel Number	2300.000 0	TSL Permittivity	37.3
Group UID	CW 0-	TSL Conductivity [S/m]	1.63
Conversion Factor	7.02	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7578 2025-08-29	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1767 2025-08-19	TSL Type	DAKS 3.5 Head 20.9 deg.C 2026-May-23 11_11_54
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		83.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.9

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	4.35	4.47
psSAR10g [W/Kg]	2.11	2.24
Power Drift [±0.2 dB]	-0.02	-0.03

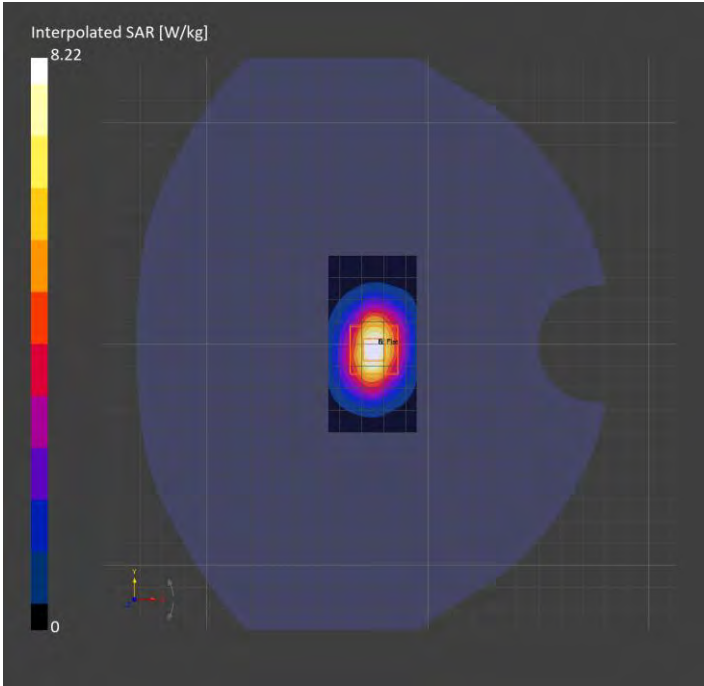

System Performance Check Report for D2600V2 - SN1183

Exposure Conditions

Frequency [MHz] Channel Number	2600.000 0	TSL Permittivity	36.0
Group UID	CW 0-	TSL Conductivity [S/m]	1.87
Conversion Factor	6.92	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7578 2025-08-29	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1767 2025-08-19	TSL Type	DAKS 3.5 Head 20.6 deg.C 2026-Jun-01 00_22_15
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		80.8
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		9.3

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.53	2.58
psSAR10g [W/Kg]	1.15	1.21
Power Drift [±0.2 dB]	0.02	-0.01

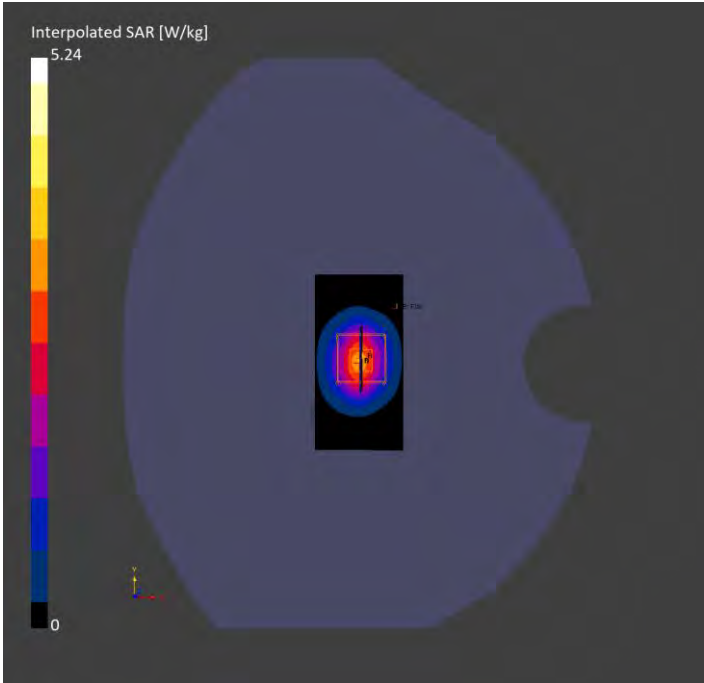

System Performance Check Report for D900V2 - SN1d083

Exposure Conditions

Frequency [MHz] Channel Number	900.000 0	TSL Permittivity	41.4
Group UID	CW 0-	TSL Conductivity [S/m]	0.912
Conversion Factor	8.94	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7578 2025-08-29	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4ip Sn1767 2025-08-19	TSL Type	DAKS 3.5 20.8 deg.C 2026-Jun-02 16_44_56
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 90.0	30.0 x 30.0 x 31.2
Grid Steps [mm]	10.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		88.7
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		17.2

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.497	0.509
psSAR10g [W/Kg]	0.324	0.341
Power Drift [±0.2 dB]	0.04	-0.05

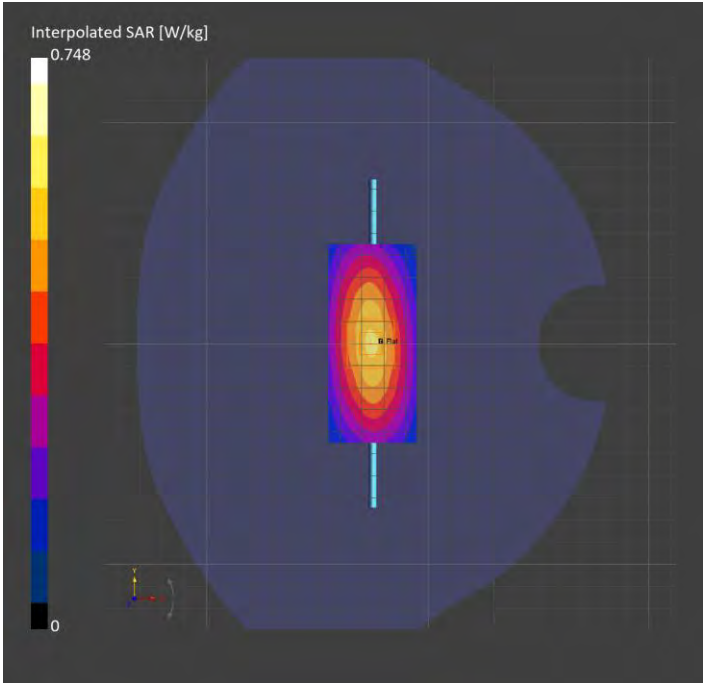

System Performance Check Report for D6.5GHzV2 - SN1032

Exposure Conditions

Frequency [MHz] Channel Number	6500.000 0	TSL Permittivity	35.8
Group UID	CW 0-	TSL Conductivity [S/m]	5.84
Conversion Factor	4.91	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7585 2026-04-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1352 2026-04-14	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	30.6 x 30.6 x 22.9
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		54.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		4.8

Measurement Results

	Area Scan	Zoom Scan	APD
psSAR1g [W/Kg]	13.0	15.0	N/A
psSAR8g [W/Kg]	3.08	3.48	N/A
psSAR10g [W/Kg]	2.55	2.87	N/A
psAPD (4.0cm², sq.) [W/m²]	N/A	N/A	69.5
Power Drift [±0.2 dB]	N/A	0.13	N/A

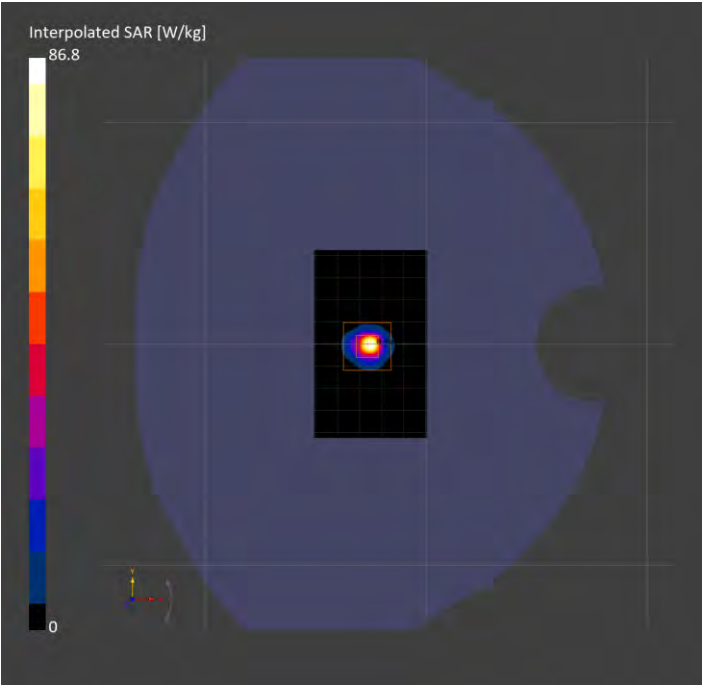

System Performance Check Report for D6.5GHzV2 - SN1033

Exposure Conditions

Frequency [MHz] Channel Number	6500.000 0	TSL Permittivity	34.0
Group UID	CW 0-	TSL Conductivity [S/m]	5.93
Conversion Factor	4.91	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7585 2026-04-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1352 2026-04-14	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	34.0 x 30.6 x 22.9
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		51.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		4.8

Measurement Results

	Area Scan	Zoom Scan	APD
psSAR1g [W/Kg]	10.5	14.0	N/A
psSAR8g [W/Kg]	2.58	3.12	N/A
psSAR10g [W/Kg]	2.14	2.57	N/A
psAPD (4.0cm², sq.) [W/m²]	N/A	N/A	62.3
Power Drift [±0.2 dB]	N/A	-0.09	N/A

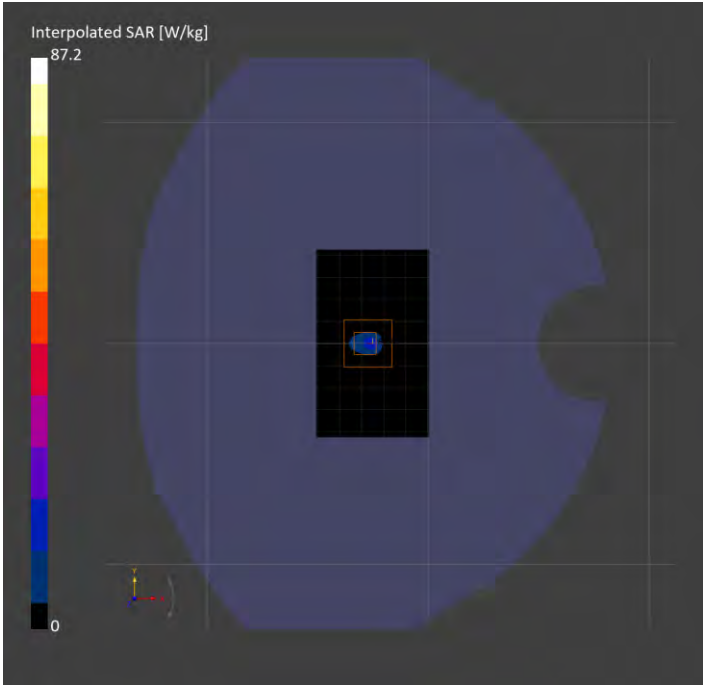

System Performance Check Report for D6.5GHzV2 - SN1033

Exposure Conditions

Frequency [MHz] Channel Number	6500.000 0	TSL Permittivity	35.7
Group UID	CW 0-	TSL Conductivity [S/m]	6.28
Conversion Factor	5.44	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3773 2026-02-13	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1544 2026-01-08	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	27.2 x 27.2 x 22.9
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		52.2
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		4.4

Measurement Results

	Area Scan	Zoom Scan	APD
psSAR1g [W/Kg]	12.7	15.9	N/A
psSAR8g [W/Kg]	3.18	3.60	N/A
psSAR10g [W/Kg]	2.64	2.97	N/A
psAPD (4.0cm², sq.) [W/m²]	N/A	N/A	72.0
Power Drift [±0.2 dB]	N/A	0.12	N/A

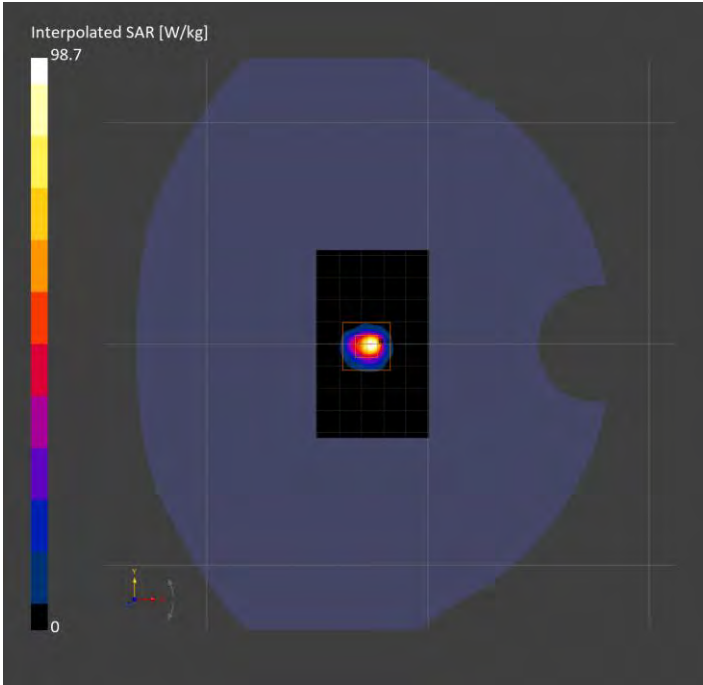

System Performance Check Report for D6.5GHzV2 - SN1032

Exposure Conditions

Frequency [MHz] Channel Number	6500.000 0	TSL Permittivity	35.6
Group UID	CW 0-	TSL Conductivity [S/m]	5.91
Conversion Factor	5.46	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3902 2026-03-11	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1259 2026-03-06	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	34.0 x 30.6 x 22.9
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		51.0
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		4.4

Measurement Results

	Area Scan	Zoom Scan	APD
psSAR1g [W/Kg]	13.1	15.3	N/A
psSAR8g [W/Kg]	3.09	3.47	N/A
psSAR10g [W/Kg]	2.56	2.87	N/A
psAPD (4.0cm², sq.) [W/m²]	N/A	N/A	69.4
Power Drift [±0.2 dB]	N/A	0.20	N/A

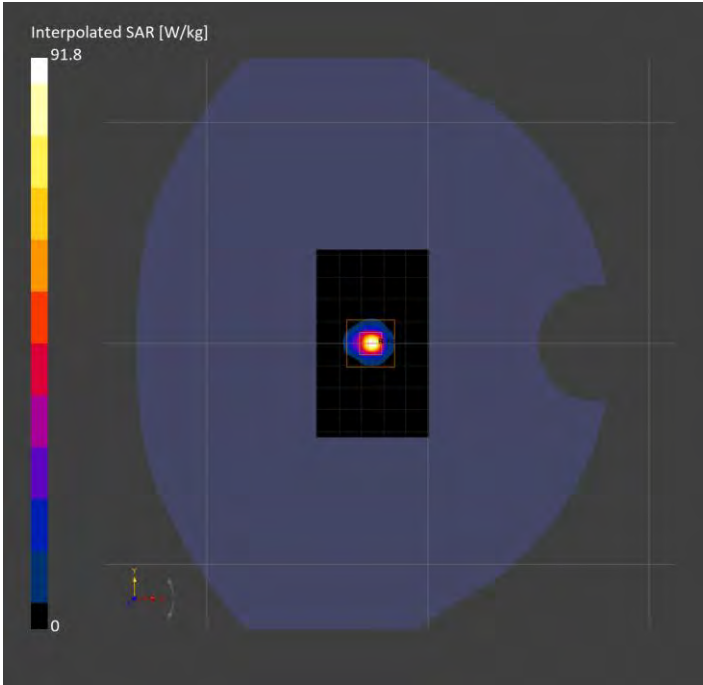

System Performance Check Report for D6.5GHzV2 - SN1033

Exposure Conditions

Frequency [MHz] Channel Number	6500.000 0	TSL Permittivity	35.5
Group UID	CW 0-	TSL Conductivity [S/m]	5.94
Conversion Factor	5.46	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3902 2026-03-11	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1259 2026-03-06	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	27.2 x 27.2 x 22.9
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		53.6
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		4.6

Measurement Results

	Area Scan	Zoom Scan	APD
psSAR1g [W/Kg]	13.1	15.7	N/A
psSAR8g [W/Kg]	3.18	3.57	N/A
psSAR10g [W/Kg]	2.64	2.95	N/A
psAPD (4.0cm², sq.) [W/m²]	N/A	N/A	71.5
Power Drift [±0.2 dB]	N/A	0.05	N/A

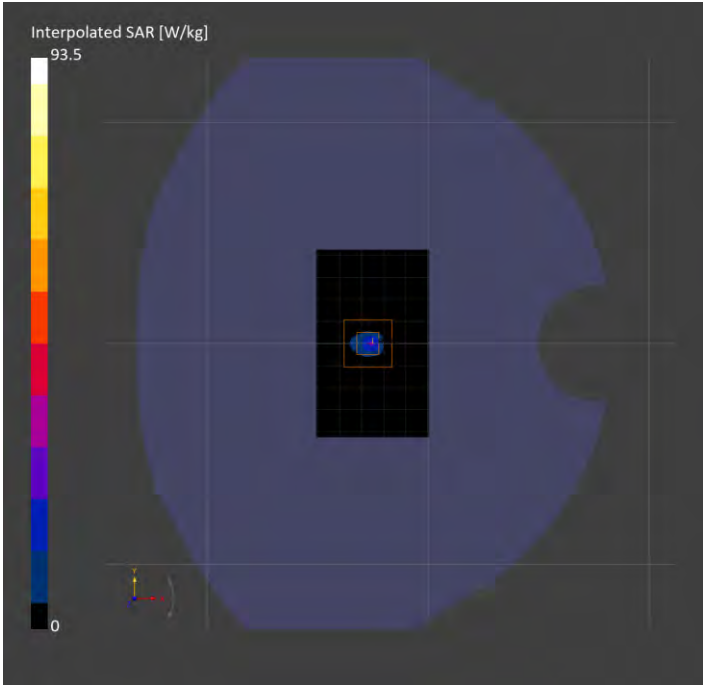

System Performance Check Report for D6.5GHzV2 - SN1032

Exposure Conditions

Frequency [MHz] Channel Number	6500.000 0	TSL Permittivity	32.7
Group UID	CW 0-	TSL Conductivity [S/m]	5.85
Conversion Factor	5.4	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7498 2026-03-11	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1439 2026-03-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	30.6 x 30.6 x 22.9
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		53.0
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		4.4

Measurement Results

	Area Scan	Zoom Scan	APD
psSAR1g [W/Kg]	25.7	29.5	N/A
psSAR8g [W/Kg]	6.06	6.67	N/A
psSAR10g [W/Kg]	5.03	5.51	N/A
psAPD (4.0cm², sq.) [W/m²]	N/A	N/A	133
Power Drift [±0.2 dB]	N/A	0.12	N/A

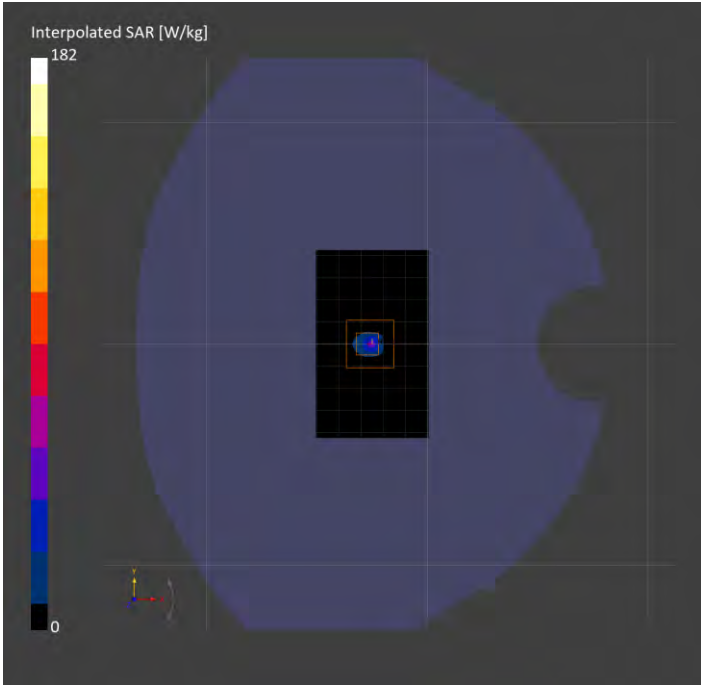

System Performance Check Report for D6.5GHzV2 - SN1033

Exposure Conditions

Frequency [MHz] Channel Number	6500.000 0	TSL Permittivity	35.8
Group UID	CW 0-	TSL Conductivity [S/m]	6.01
Conversion Factor	5.4	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7498 2026-03-11	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1439 2026-03-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	27.2 x 27.2 x 22.9
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		56.1
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		4.9

Measurement Results

	Area Scan	Zoom Scan	APD
psSAR1g [W/Kg]	13.3	15.3	N/A
psSAR8g [W/Kg]	3.26	3.53	N/A
psSAR10g [W/Kg]	2.71	2.92	N/A
psAPD (4.0cm², sq.) [W/m²]	N/A	N/A	70.5
Power Drift [±0.2 dB]	0.06	-0.02	N/A

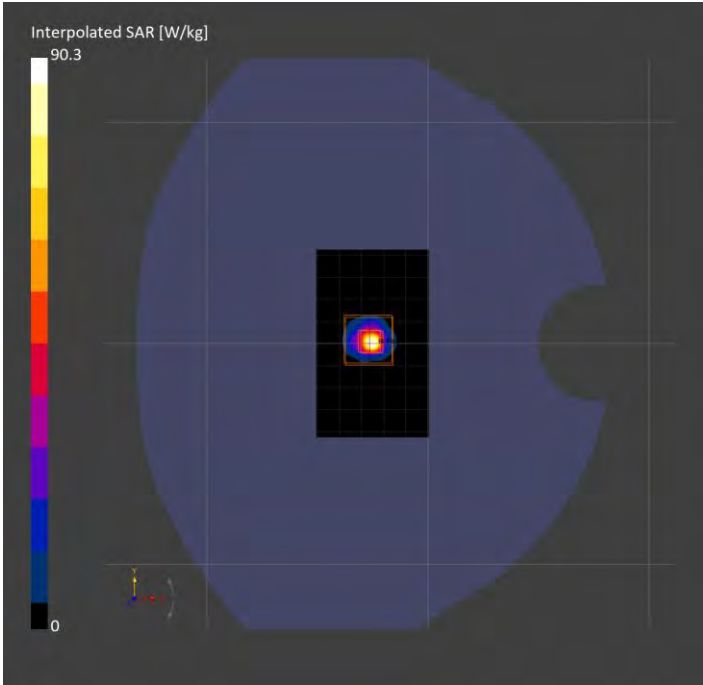

Validation band: CW, FRONT

Exposure Conditions

Band	Validation band	Phantom Section	5G
Frequency [MHz] Channel Number	10000.0 10000	Conversion Factor	1.0
Group UID	CW, 0--	Position Test Distance [mm]	FRONT 10.00

Hardware Setup


Probe Calibration Date	EUmmWV4 - SN9619_F1-55GHz 2026-03-17	Phantom	mmWave xxxx
DAE Calibration Date	DAE4 Sn1716 2026-03-06	Medium	Air -
Software Version	3.2.2.2358		

Scan Setup

Scan Type	5G Scan	Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.125 x 0.125	Sensor Surface [mm]	10.0

Measurement Results

Avg. Area [cm²]	4.00
psPDn+ [W/m²]	31.6
psPDtot+ [W/m²]	31.8
psPDmod+ [W/m²]	31.9
E _{max} [V/m]	115
Power Drift [dB]	-0.02

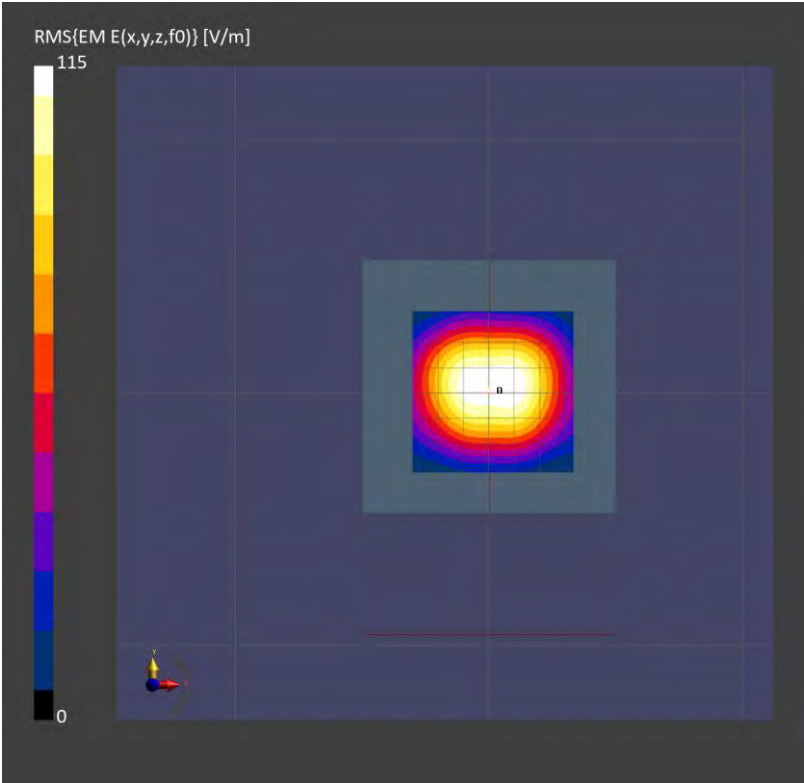

Custom Band: CW, FRONT

Exposure Conditions

Band	Custom Band	Phantom Section	5G
Frequency [MHz] Channel Number	10000.0 10000000	Conversion Factor	1.0
Group UID	CW, 0--	Position Test Distance [mm]	FRONT 10.00

Hardware Setup


Probe Calibration Date	EUmmWV4 - SN9617_F1-55GHz 2026-01-15	Phantom	mmWave xxxx
DAE Calibration Date	DAE4 Sn1548 2026-02-10	Medium	Air -
Software Version	3.2.2.2358		

Scan Setup

Scan Type	5G Scan	Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.125 x 0.125	Sensor Surface [mm]	10.0

Measurement Results

Avg. Area [cm²]	4.00
psPDn+ [W/m²]	30.7
psPDtot+ [W/m²]	30.9
psPDmod+ [W/m²]	31.0
E _{max} [V/m]	112
H _{max} [A/m]	0.313
Power Drift [dB]	-0.02

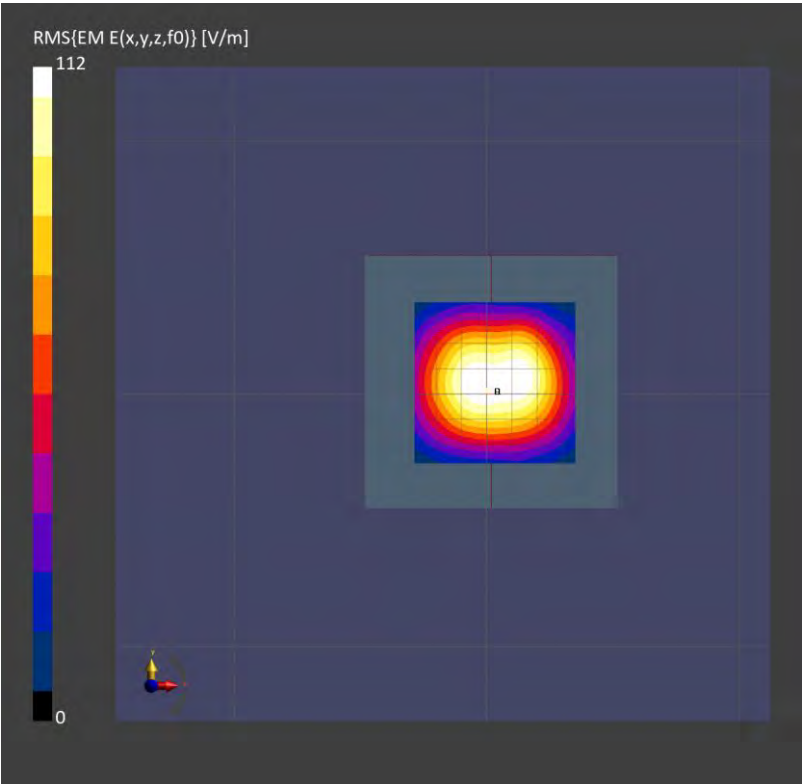

Custom Band: CW, FRONT

Exposure Conditions

Band	Custom Band	Phantom Section	5G
Frequency [MHz] Channel Number	10000.0 10000000	Conversion Factor	1.0
Group UID	CW, 0--	Position Test Distance [mm]	FRONT 10.00

Hardware Setup


Probe Calibration Date	EUmmWV4 - SN9479_F1-55GHz 2026-02-03	Phantom	mmWave xxxx
DAE Calibration Date	DAE4 Sn1673 2026-04-27	Medium	Air -
Software Version	3.2.2.2358		

Scan Setup

Scan Type	5G Scan	Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.125 x 0.125	Sensor Surface [mm]	10.0

Measurement Results

Avg. Area [cm²]	4.00
psPDn+ [W/m²]	31.9
psPDtot+ [W/m²]	32.3
psPDmod+ [W/m²]	32.5
E _{max} [V/m]	119
H _{max} [A/m]	0.324
Power Drift [dB]	0.00

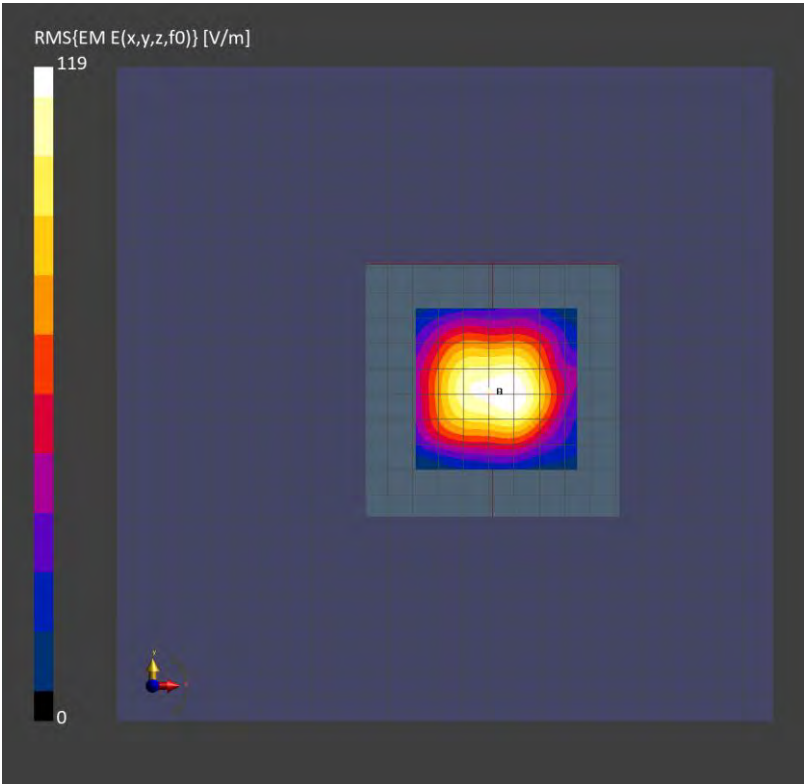

Validation band: CW, FRONT

Exposure Conditions

Band	Validation band	Phantom Section	5G
Frequency [MHz] Channel Number	30000.0 30000	Conversion Factor	1.0
Group UID	CW, 0--	Position Test Distance [mm]	FRONT 5.55

Hardware Setup


Probe Calibration Date	EUmmWV4 - SN9619_F1-55GHz 2026-03-17	Phantom	mmWave xxxx
DAE Calibration Date	DAE4 Sn1716 2026-03-06	Medium	Air -
Software Version	3.2.2.2358		

Scan Setup

Scan Type	5G Scan	Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25	Sensor Surface [mm]	5.55

Measurement Results

Avg. Area [cm²]	4.00
psPDn+ [W/m²]	118
psPDtot+ [W/m²]	122
psPDmod+ [W/m²]	122
E _{max} [V/m]	243
Power Drift [dB]	0.01

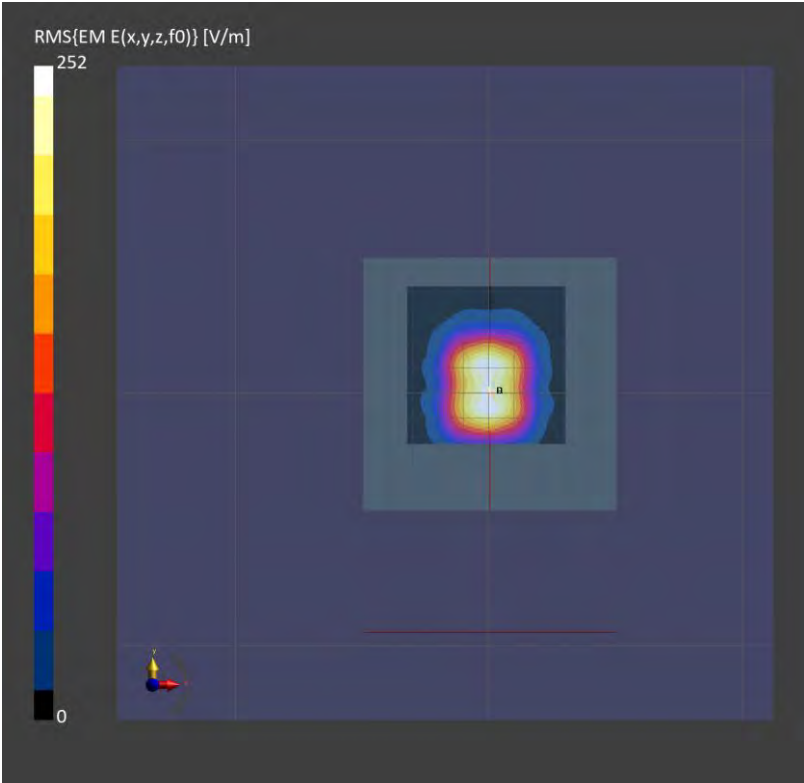

Validation band: CW, FRONT

Exposure Conditions

Band	Validation band	Phantom Section	5G
Frequency [MHz] Channel Number	30000.0 30000	Conversion Factor	1.0
Group UID	CW, 0--	Position Test Distance [mm]	FRONT 5.55

Hardware Setup


Probe Calibration Date	EUmmWV4 - SN9617_F1-55GHz 2026-01-15	Phantom	mmWave xxxx
DAE Calibration Date	DAE4 Sn1548 2026-02-10	Medium	Air -
Software Version	3.2.2.2358		

Scan Setup

Scan Type	5G Scan	Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25	Sensor Surface [mm]	5.55

Measurement Results

Avg. Area [cm²]	4.00
psPDn+ [W/m²]	88.5
psPDtot+ [W/m²]	90.5
psPDmod+ [W/m²]	90.9
E _{max} [V/m]	217
Power Drift [dB]	-0.35

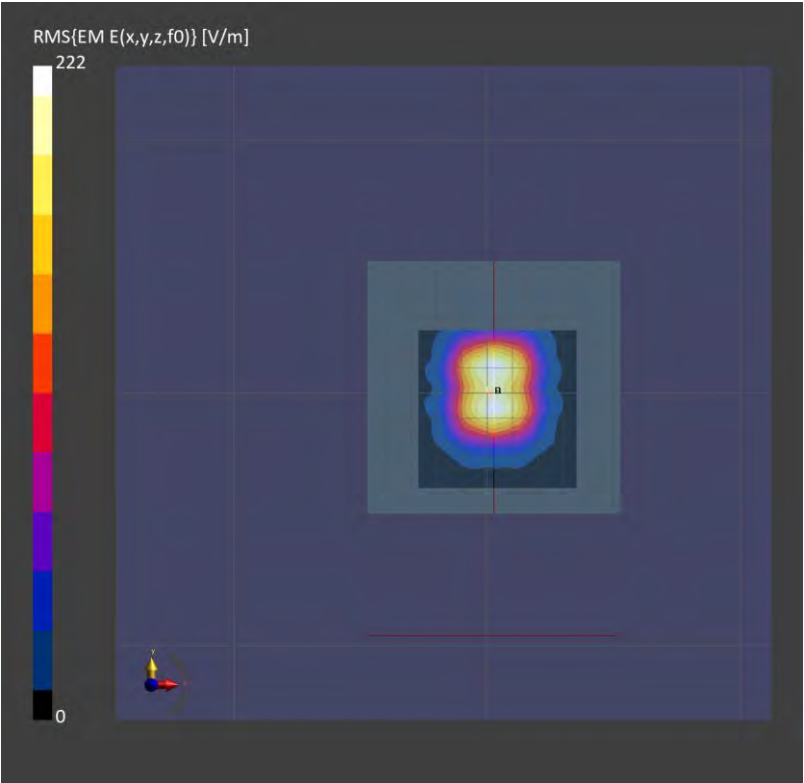

Validation band: CW, FRONT

Exposure Conditions

Band	Validation band	Phantom Section	5G
Frequency [MHz] Channel Number	30000.0 30000	Conversion Factor	1.0
Group UID	CW, 0--	Position Test Distance [mm]	FRONT 5.55

Hardware Setup


Probe Calibration Date	EUmmWV4 - SN9479_F1-55GHz 2026-02-03	Phantom	mmWave xxxx
DAE Calibration Date	DAE4 Sn1673 2026-04-27	Medium	Air -
Software Version	3.2.2.2358		

Scan Setup

Scan Type	5G Scan	Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25	Sensor Surface [mm]	5.55

Measurement Results

Avg. Area [cm²]	4.00
psPDn+ [W/m²]	106
psPDtot+ [W/m²]	107
psPDmod+ [W/m²]	108
E _{max} [V/m]	244
H _{max} [A/m]	0.631
Power Drift [dB]	-0.04

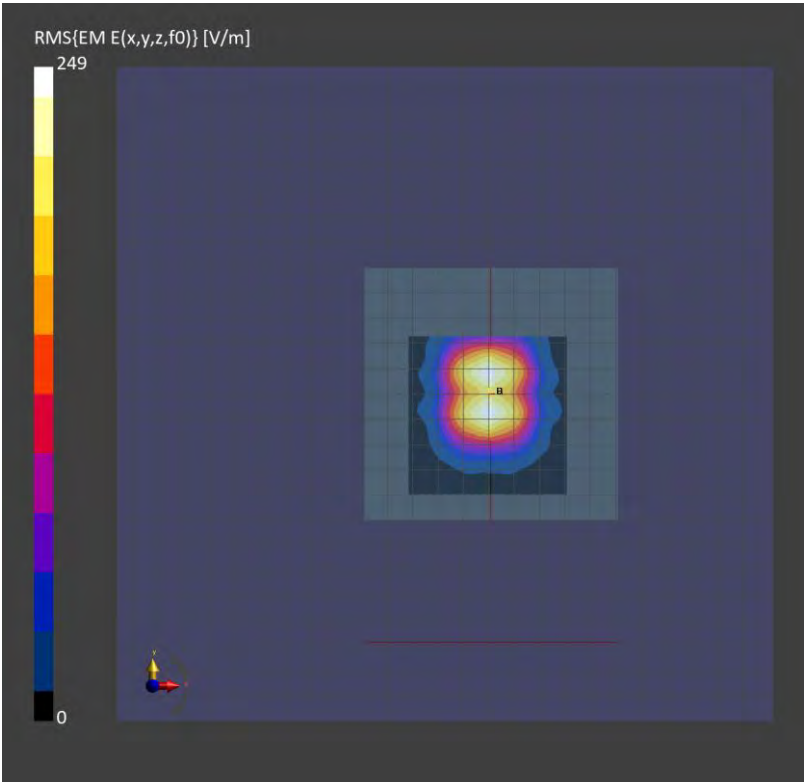

System Performance Check Report for D6.5GHzV2 - SN1033

Exposure Conditions

Frequency [MHz] Channel Number	6500.000 0	TSL Permittivity	35.1
Group UID	CW 0-	TSL Conductivity [S/m]	6.03
Conversion Factor	4.91	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN7585 2026-04-15	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1352 2026-04-14	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	23.8 x 23.8 x 22.9
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		53.9
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		4.6

Measurement Results

	Area Scan	Zoom Scan	APD
psSAR1g [W/Kg]	13.1	15.5	N/A
psSAR8g [W/Kg]	3.16	3.60	N/A
psSAR10g [W/Kg]	2.62	2.98	N/A
psAPD (4.0cm², sq.) [W/m²]	N/A	N/A	72.0
Power Drift [±0.2 dB]	N/A	0.03	N/A

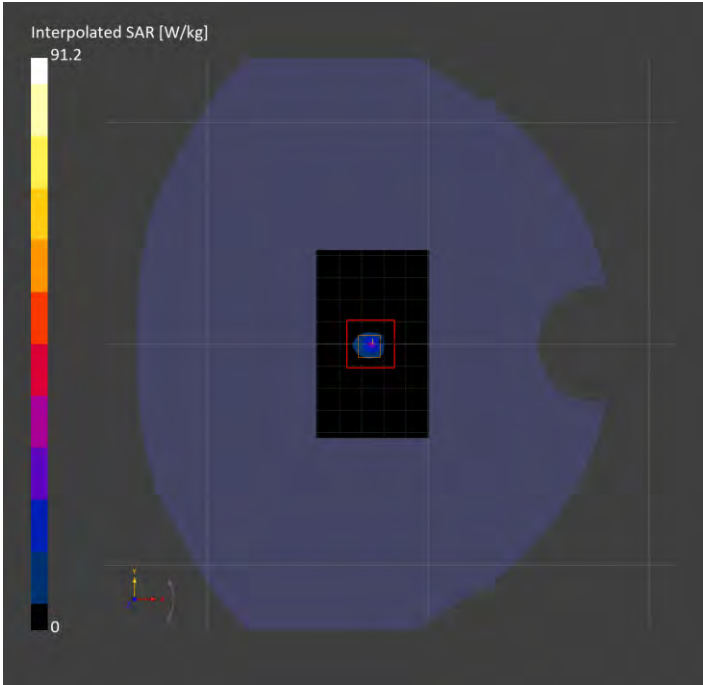

System Performance Check Report for D6.5GHzV2 - SN1033

Exposure Conditions

Frequency [MHz] Channel Number	6500.000 0	TSL Permittivity	35.8
Group UID	CW 0-	TSL Conductivity [S/m]	6.36
Conversion Factor	5.44	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3773 2026-02-13	Phantom	Twin-SAM V8.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1544 2026-01-08	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	30.6 x 30.6 x 22.9
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		51.3
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		4.8

Measurement Results

	Area Scan	Zoom Scan	APD
psSAR1g [W/Kg]	13.0	15.8	N/A
psSAR8g [W/Kg]	3.11	3.54	N/A
psSAR10g [W/Kg]	2.58	2.93	N/A
psAPD (4.0cm², sq.) [W/m²]	N/A	N/A	70.9
Power Drift [±0.2 dB]	N/A	0.06	N/A

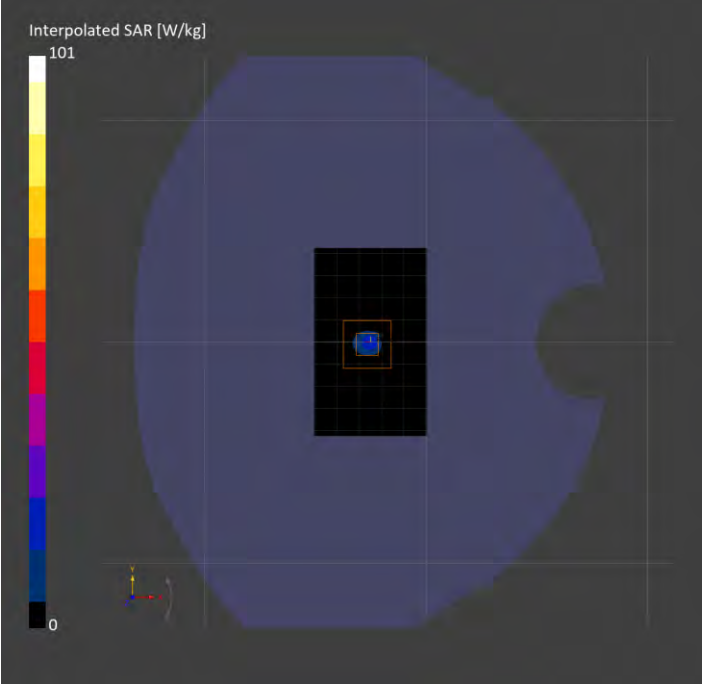

System Performance Check Report for D6.5GHzV2 - SN1033

Exposure Conditions

Frequency [MHz] Channel Number	6500.000 0	TSL Permittivity	32.5
Group UID	CW 0-	TSL Conductivity [S/m]	5.57
Conversion Factor	5.46	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup


Probe Calibration Date	EX3DV4 - SN3902 2026-03-11	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1259 2026-03-06	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	23.8 x 23.8 x 22.9
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		52.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		4.6

Measurement Results

	Area Scan	Zoom Scan	APD
psSAR1g [W/Kg]	13.1	14.7	N/A
psSAR8g [W/Kg]	2.98	3.33	N/A
psSAR10g [W/Kg]	2.47	2.75	N/A
psAPD (4.0cm², sq.) [W/m²]	N/A	N/A	66.6
Power Drift [±0.2 dB]	N/A	0.07	N/A

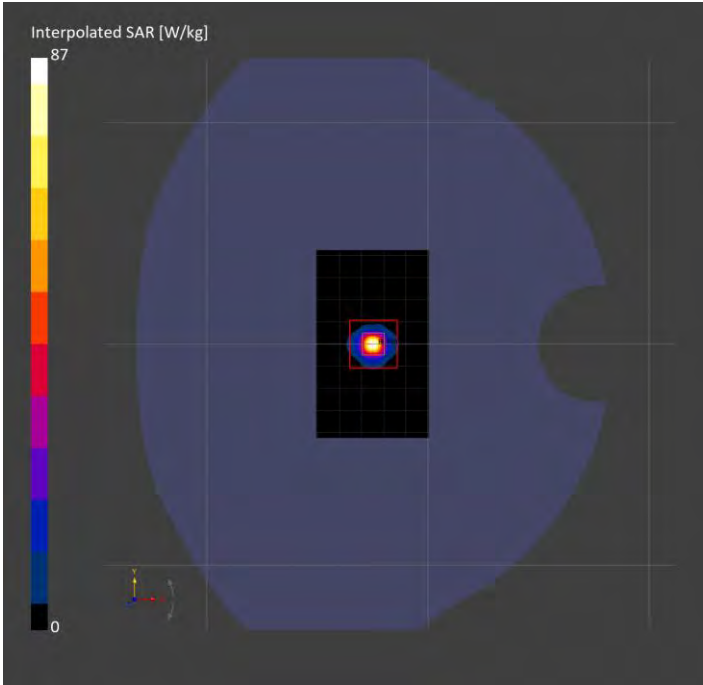

System Performance Check Report for D6.5GHzV2 - SN1033

Exposure Conditions

Frequency [MHz] Channel Number	6500.000 0	TSL Permittivity	36.1
Group UID	CW 0-	TSL Conductivity [S/m]	6.26
Conversion Factor	5.4	Phantom Section TSL	Flat Head Simulating Liquid

Hardware Setup

Probe Calibration Date	EX3DV4 - SN7498 2026-03-11	Phantom	Twin-SAM V5.0 (30deg probe tilt)
DAE Calibration Date	DAE4 Sn1439 2026-03-05	TSL Type	HBBL-600-10000
Software Version	17.0.4.7034		

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 85.0	27.2 x 23.8 x 22.9
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
M2/M1 [> 30%]		52.5
Dist 3dB Peak [> Grid Steps Δx, Δy mm]		4.9

Measurement Results

	Area Scan	Zoom Scan	APD
psSAR1g [W/Kg]	13.5	15.2	N/A
psSAR8g [W/Kg]	3.09	3.40	N/A
psSAR10g [W/Kg]	2.56	2.81	N/A
psAPD (4.0cm², sq.) [W/m²]	N/A	N/A	68.0
Power Drift [±0.2 dB]	N/A	0.05	N/A

