

MEASUREMENT REPORT

FCC PART 15.519 / ISCED RSS-220 Ultra-Wideband

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

08/05/2025 - 10/15/2025

Test Report Issue Date:

12/19/2025

Test Site/Location:

Element Materials Technology Morgan Hill, CA, USA

Test Report Serial No.:

1C2504170045-02-R6.BCG

FCC ID:

BCGA2937

IC:

579C-A2937

APPLICANT:

Apple Inc.

Application Type:

Certification

Model/HVIN:

A2937

EUT Type:

Location Tracking Tag

Operational Frequency:

7987.2MHz (Ch 9)

FCC Classification:

Ultra-Wideband Transmitter (UWB)

FCC Rule Part(s):

Part 15 Subpart F (15.519)

ISCED Specification:

RSS-220 Issue 1 and RSS-Gen Issue 5

RSS 220 Subclass:

Hand-held Communication Devices


Test Procedures:

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to
C63.10a:2024, KDB 393764 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 393764 D01 v02r01. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N:1C2504170045-02-R6.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez

Executive Vice President



FCC ID: BCGA2937 IC: 579C-A2937	 MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025 EUT Type: Location Tracking Tag	Page 1 of 42

V 10.6 08/28/2023

Revision Summary

Revision	Description	Issue Date	Revised By
-	Released to client & TCB	11/11/2025	WKR007077
R1	Addressed initial TCB review updates and minor formatting corrections	11/17/2025	WKR007077
R2	Addressed additional TCB feedback minor formatting	11/18/2025	WKR007077
R3	Addressed additional TCB comments in 2.4, 7.3, 7.6, and 7.7	12/5/2025	WKR016622
R4	Addressed additional TCB comments in 2.2 and 7.4.2	12/10/2025	WKR007077
R5	Addressed additional TCB comments in sections 1.2 and 7.4.2 and minor formatting	12/15/2025	WKR016622

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 2 of 42

V 10.6 08/28/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	Element Materials Technology Test Location	4
1.3	Test Facility / Accreditations	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities	5
2.3	Antenna Description	7
2.4	Test Support Equipment	7
2.5	Test Configuration	7
2.6	Software and Firmware	7
2.7	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	Radiated Emissions	8
3.3	AC Line Conducted Emissions	8
3.4	Environmental Conditions	9
4.0	ANTENNA REQUIREMENTS	10
5.0	MEASUREMENT UNCERTAINTY	11
6.0	TEST EQUIPMENT CALIBRATION DATA	12
7.0	TEST RESULTS	13
7.1	Summary	13
7.2	10dBc Bandwidth Measurement	14
7.3	Bandwidth Measurement	17
7.4	Maximum Peak and Average Radiated Power (EIRP)	20
7.4.1	Peak Radiated Power Measurement	22
7.4.2	Average Radiated Power Measurement	23
7.5	Cease Transmission Time	24
7.6	Radiated Spurious Emissions Measurements – Above 960MHz	27
7.7	Radiated Spurious Emissions Measurements – Below 960MHz	38
8.0	CONCLUSION	42

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 3 of 42

V 10.6 08/28/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology Morgan Hill facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology Morgan Hill is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology Morgan Hill facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 4 of 42

V 10.6 08/28/2023

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Location Tracking Tag FCC ID: BCGA2937** and **IC: 579C-A2937**. The test data contained in this report pertains only to the emissions due to the EUT's Ultra-Wideband (UWB) transmitter.

Test Device Serial No.: HG9HKD0000800014W6, JLG0VM4JHX, FWMQFY99HG, K62JR2TLCX

2.2 Device Capabilities

This device contains the following capabilities:

802.15.4ab-NB, Bluetooth LE, UWB

For ISSED, this device is under subclass 5.3 Hand-held Communication Devices of RSS-220

Data Port UWB Radio Terminal Access: No

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 5 of 42

V 10.6 08/28/2023

Ch.	Frequency (MHz)	Config	Payload
9	8000	0	125B
		1	125B
		4	0B
		10	125B
		11	125B
		12	0B
		501	0B
		503	0B
		601	0B
		605	0B
		607	0B
		701	0B
		702	0B
		703	0B
		704	0B
		705	0B
		706	0B
		801	0B (GAP 0)
			0B (GAP 64)
		802	0B
		803	0B
		804	0B (GAP 0)
			0B (GAP 64)
		805	0B
		806	0B
		807	0B (GAP 0)
			0B (GAP 64)
		808	0B
		809	0B
		810	0B (GAP 0)
			0B (GAP 64)
		811	0B
		812	0B

Table 2-1. UWB Frequency / Channel Operations

Notes:

1. All the above configurations from Table 2-1 were tested and only the worst-case configurations were reported. For all possible packet types on the device, please refer to Technical Description Document.

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 6 of 42

V 10.6 08/28/2023

2.3 Antenna Description

The following antenna gain provided by manufacturer was used for testing.

Frequency [GHz]	Antenna Gain (dBi)
7750-8250	0.04

Table 2-2. Highest Antenna Gain

2.4 Test Support Equipment

1	Apple Macbook Pro	Model:	A2141	S/N:	C02H604EQ05D
	w/AC/DC Adapter	Model:	A2166	S/N:	C4H042705ZNPM0WA6
2	USB-C Cable	Model:	A246C	S/N:	N/A
	w/ AC Adapter	Model:	A2305	S/N:	N/A
3	Apple iPhone	Model:	A3257	S/N:	MN7G0H27MD
4	Transmission Board V3.1	Model:	V2.13-Beta2	S/N:	9000TTF1608508

Table 2-3. Test Support Equipment Used

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 and KDB 558074 D01 v05r02. ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 was used to reference the appropriate EUT setup for radiated spurious emissions testing. See Sections 3.3 for radiated emissions test setups.

For emissions from 960MHz – 18GHz, channel 9 was tested with highest power and worst case configuration. The emissions below 960MHz and above 18GHz were tested with the highest transmitting power and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

2.6 Software and Firmware

The test was conducted with firmware version ChillyFactory2A105_3A10 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 7 of 42

V 10.6 08/28/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024) and the guidance provided in KDB 393764 D01 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

FCC ID: BCGA2937 IC: 579C-A2937	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 8 of 42

V 10.6 08/28/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was rotated about its vertical axis while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA2937 IC: 579C-A2937	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 9 of 42

V 10.6 08/28/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna(s) of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 10 of 42

V 10.6 08/28/2023

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	2.07
Line Conducted Disturbance	1.91
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (<1GHz)	4.85
Radiated Disturbance (>1GHz)	5.08
Radiated Disturbance (>18GHz)	4.59

Parameter	Expanded Uncertainty
Time	$\pm 1.06\%$

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 11 of 42

V 10.6 08/28/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance with the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-26.5GHz PXA Signal Analyzer	10/31/2024	Annual	10/31/2025	MY55330128
Anritsu	ML2495A	Power Meter	2/10/2025	Annual	2/10/2026	1306009
Anritsu	MA2411B	Pulse Power Sensor	2/10/2025	Annual	2/10/2026	1315051
Anritsu	MA2411B	Pulse Power Sensor	2/10/2025	Annual	2/10/2026	1339027
ATM	180-442-KF	20dB Nominal Gain Horn Antenna	3/24/2025	Annual	3/24/2026	T058601-2
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	4/16/2025	Annual	4/16/2026	00218555
Keysight Technology	N9040B	UXA Signal Analyzer	6/9/2025	Annual	6/9/2026	MY57212015
Mini-Circuits	FLC-1.5FT-SMSM+	30MHz-27GHz Conducted Cable *	6/17/2025	Annual	6/17/2026	16113316
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/14/2024	Annual	8/14/2025	101648
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/20/2025	Annual	5/20/2026	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	5/13/2025	Annual	5/13/2026	101867
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	11/15/2024	Annual	11/15/2025	102326
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/3/2025	Annual	6/3/2026	100052
Rohde & Schwarz	ENV216	Two-Line V-Network	4/25/2025	Annual	4/25/2026	101364
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	5/7/2025	Annual	5/7/2026	00304

Table 6-1. Test Equipment List

Note:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- * denotes passive equipment that have been internally verified/calibrated.

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 12 of 42

V 10.6 08/28/2023

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCGA2937
 IC: 579C-A2937
 FCC Classification: Ultra-Wideband Transmitter

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
§15.503, §15.519 (b)	RSS-220 [2]	10dBc Bandwidth	≥ 500MHz	RADIATED	PASS	Section 7.2, 7.3
§ 2.1049	RSS-Gen [6.7]	Occupied Bandwidth	N/A		N/A	Section 7.3
§15.519 (e)	RSS-220 [5.3.1(g)]	Maximum Peak Power Spectral Density (Peak EIRP)	< 0 dBm/50MHz EIRP		PASS	Sections 7.4.1
§15.519 (c)	RSS-220 [5.3.1(d)]	Maximum Average Emission (Average EIRP)	< -41.3 dBm/MHz EIRP		PASS	Section 7.4.2
§15.519 (a)(1)	RSS-220 [5.3.1(b)]	Cease Transmission Time	See §15.519 (a)(1) and RSS-220 [5.3.1(b)] for details		PASS	Section 7.5
§15.519 (c)	RSS-220 [5.3.1(d)]	Radiated Emissions Above 960MHz	See table in §15.519 (c) and RSS-220[5.3.1(d)] for details		PASS	Sections 7.6
§15.519 (d)	RSS-220 [5.3.1(e)]	Radiated Emissions in the 1164 – 1240Mhz and 1559 – 1610MHz GPS Bands	See §15.519 (d) and RSS-220 [5.3.1 (e)] for details		PASS	Sections 7.6
§15.519 (c), §15.209	RSS-220 [3.4] RSS-Gen [8.9]	Radiate Emissions Below 960MHz	Emissions in restricted bands must meet the radiated limits detailed in §15.209 (RSS-Gen [8.9])		PASS	Section 7.7
§15.207	RSS-Gen [8.8]	AC Line Conducted Emissions 150kHz – 30MHz	N/A	AC LINE CONDUCTED	N/A	N/A

Table 7-1. Summary of Test Results

Notes:

- All modes of operation were investigated. The test results shown in the following sections represent the worst case emissions.
- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation”, Version 3.4.2.
- The EUT is powered by a disposable coin battery. AC Line conducted results are not applicable.

FCC ID: BCGA2937 IC: 579C-A2937	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 13 of 42

V 10.6 08/28/2023

7.2 10dBc Bandwidth Measurement

§15.503 §15.519 (b)

Test Overview and Limit

The UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna. The upper boundary is designated F_H and the lower boundary is designated F_L . The frequency at which the highest radiated emission occurs is designated F_M .

- The center frequency, F_C , equals $(F_H + F_L)/2$
- The fractional bandwidth equals $2(F_H - F_L) / (F_H + F_L)$

The UWB bandwidth of a device operating under the provisions of this section must be contained between 3100MHz and 10,600MHz.

- a) *The minimum permissible 10dBc Bandwidth is 500 MHz*
- b) *Fractional bandwidth is equal or greater than 0.20*

Test Procedure Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Section 10.1
KDB 393764 D01 v02r01

Test Settings

1. RBW = 1MHz
2. VBW = 3MHz
3. Detector = Peak
4. Trace mode = max hold
5. Sweep = auto couple
6. The trace was allowed to stabilize

FCC ID: BCGA2937 IC: 579C-A2937	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 14 of 42

V 10.6 08/28/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

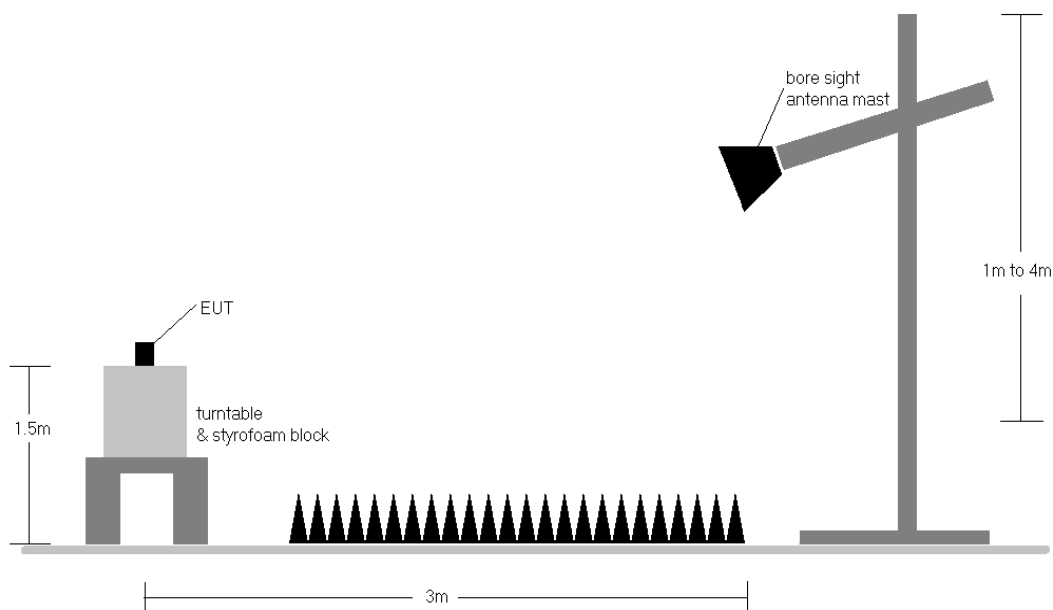


Figure 7-1. Test Setup

Test Notes


1. In those cases where the measured emission spectrum contains multiple (more than two) -10dBc points, the outermost points define the UWB bandwidth (i.e., the widest bandwidth is reported).
2. All modes of operation were investigated, and the worst-case emissions are reported.

FCC ID: BCGA2937 IC: 579C-A2937	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 15 of 42

V 10.6 08/28/2023

Frequency [GHz]	Channel	Config	Payload	F _M [GHz]	F _L [GHz]	F _H [GHz]	F _C [GHz]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
8	9	1	125B	7.75	7.72	8.25	7.99	528.00	500	Pass

Table 7-2. 10dBc Bandwidth Measurements (UWB, Ch.9, 8GHz)

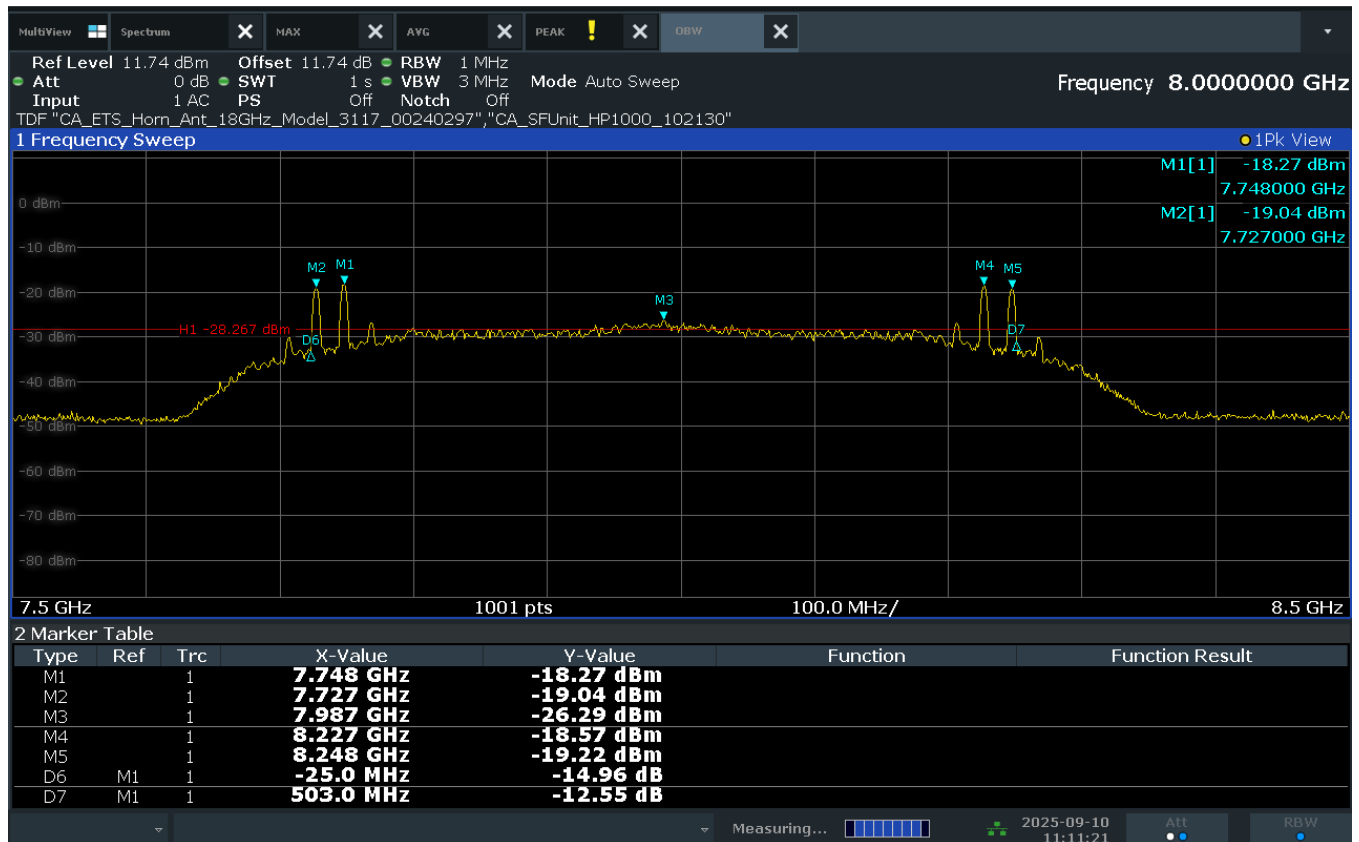

Plot 7-1. 10dBc Bandwidth (Ch. 9, Config 1/Payload 125B)

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 16 of 42

V 10.6 08/28/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3 Bandwidth Measurement

RSS-220 [2], RSS-Gen [6.7]

Test Overview and Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Section 6.9
RSS-Gen [6.7]

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 10dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 17 of 42

V 10.6 08/28/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

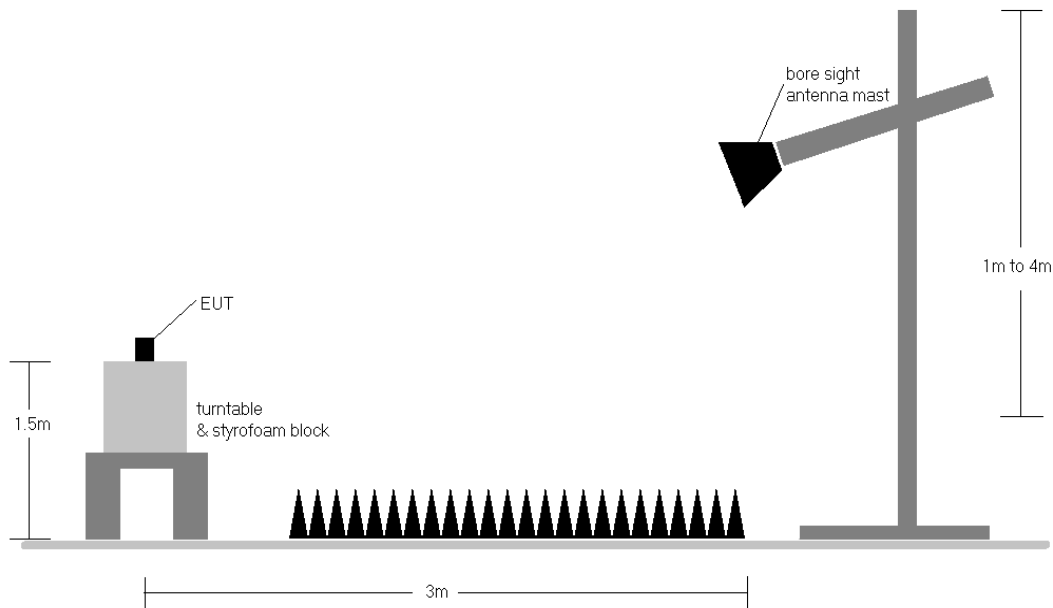


Figure 7-2. Test Instrument & Measurement Setup

Test Notes


1. All modes of operation were investigated and the worst-case emissions are reported.

FCC ID: BCGA2937 IC: 579C-A2937	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 18 of 42

V 10.6 08/28/2023

Frequency [GHz]	Channel	Config	Payload	Measured OBW [MHz]	Measured dBc Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
8	9	1	125B	603.59	530.80	500	Pass

Table 7-3. ISED 10dBc Bandwidth & 99% OBW Measurements (UWB, Ch.9, 8GHz)

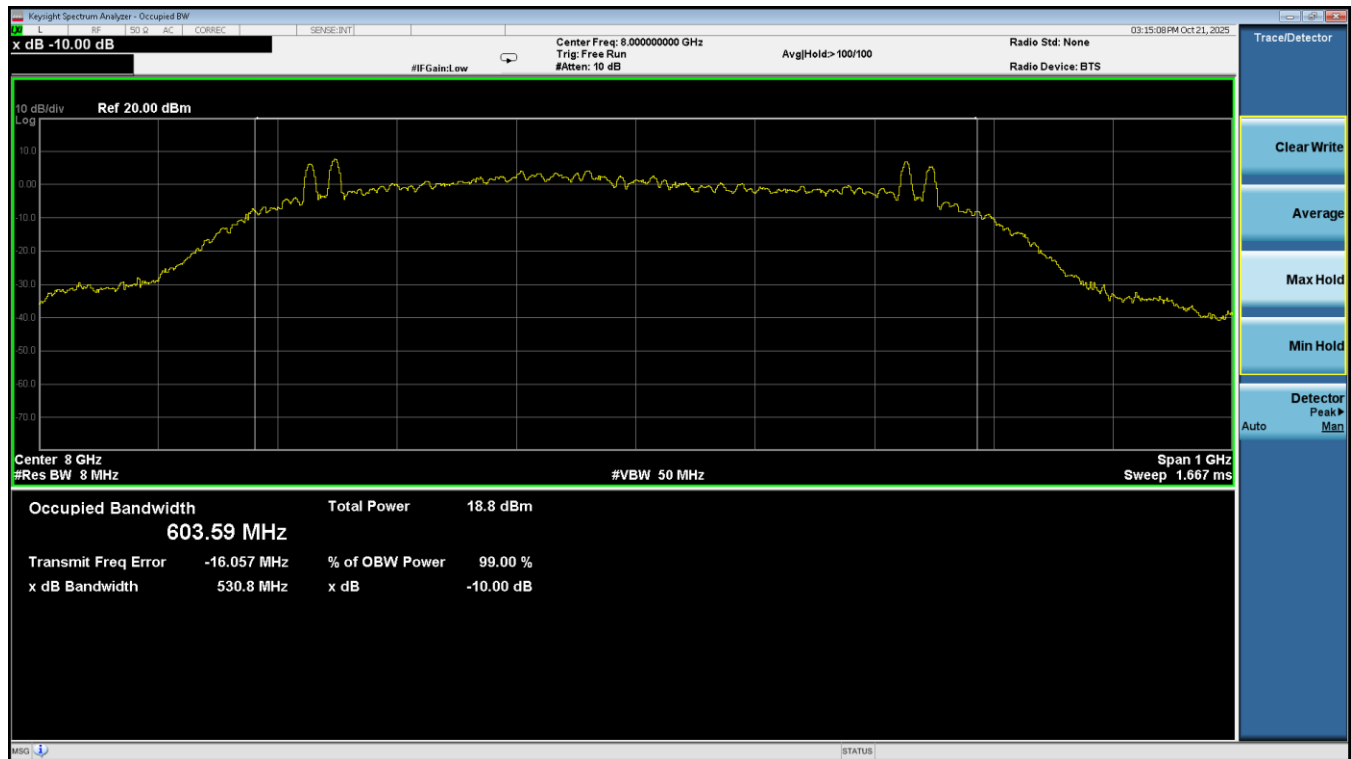

Plot 7-2. ISED 10dBc Occupied Bandwidth & 99% OBW (Ch. 9, Config 1/Payload125B)

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 19 of 42

V 10.6 08/28/2023

7.4 Maximum Peak and Average Radiated Power (EIRP)

§15.519 (c) §15.519 (e); RSS-220 [5.3.1(d)] RSS-220 [5.3.1(g)]

Test Overview and Limits

15.519 (e) There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, F_M . That limit is 0 dBm for Peak EIRP.

15.519 (c) The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency [MHz]	EIRP [dBm]
3100-10600	-41.3

Table 7-4. FCC 15.519 Average EIRP limit

Frequency [MHz]	EIRP [dBm]
4750-10600	-41.3

Table 7-5. RSS-220 Average EIRP limit

Test Procedure Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Section 10.3.5 and 10.3.7
KDB 393764 D01 v02r01

Test Settings

Average EIRP Measurements

1. RBW = 1MHz
2. VBW = 3MHz
3. Detector = Average (RMS)
4. Sweep time = No more than a 1 ms integration period over each measurement bin
5. Trace mode = Max hold
6. Trace was allowed to stabilize

Peak EIRP Measurements

1. RBW = 50MHz
2. VBW = 50MHz
3. Detector = Peak
4. Sweep time = auto couple
5. Trace mode = Max hold
6. Trace was allowed to stabilize

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 20 of 42

V 10.6 08/28/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

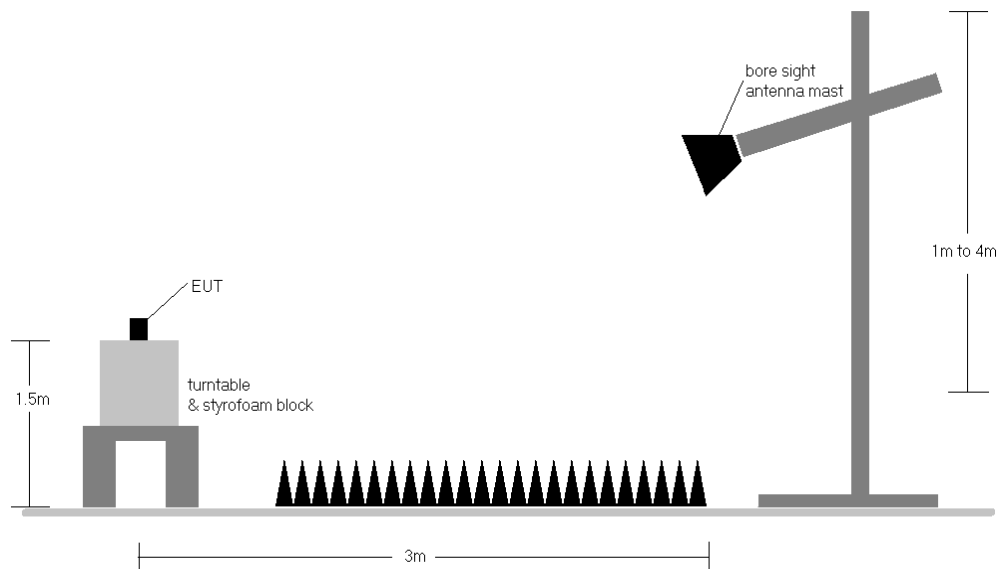


Figure 7-3. Test Instrument & Measurement Setup

Test Notes

1. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
2. All modes of operation were investigated, and the worst-case emissions are reported.

FCC ID: BCGA2937 IC: 579C-A2937	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 21 of 42


V 10.6 08/28/2023

7.4.1 Peak Radiated Power Measurement

§15.519(e); RSS-220 [5.3.1(g)]

Frequency [GHz]	Channel	Config	Payload	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	F _M [GHz]	Peak EIRP [dBm/50MHz]	Peak EIRP Limit [dBm/50MHz]	Margin [dB]
8.0	9	1	125B	H	101	316	7.9868	-3.00	0.00	-3.00

Table 7-6. Peak EIRP Measurements (Channel 9)

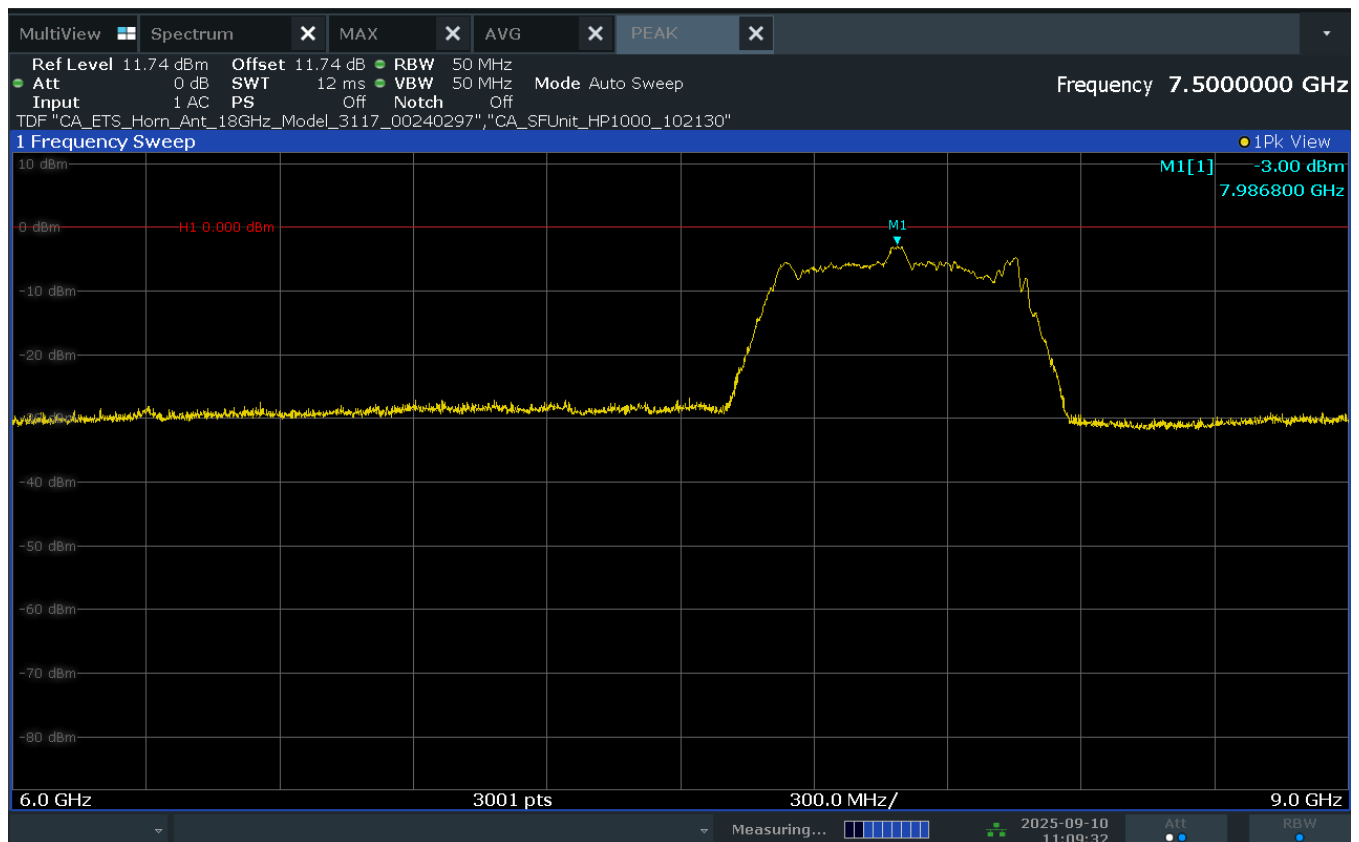

Plot 7-3. Peak Radiated Power (Ch. 9, Config 1 /Payload 125B)

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 22 of 42


V 10.6 08/28/2023

7.4.2 Average Radiated Power Measurement

§15.519(c); RSS-220 [5.3.1(d)]

Frequency [GHz]	Channel	Config	Payload	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	F _M [GHz]	Average EIRP [dBm/MHz]	Average EIRP Limit [dBm/MHz]	Margin [dB]
8.0	9	1	125B	H	101	316	7.9558	-42.09	-41.30	-0.73

Table 7-7. Average EIRP Measurements (Channel 9)

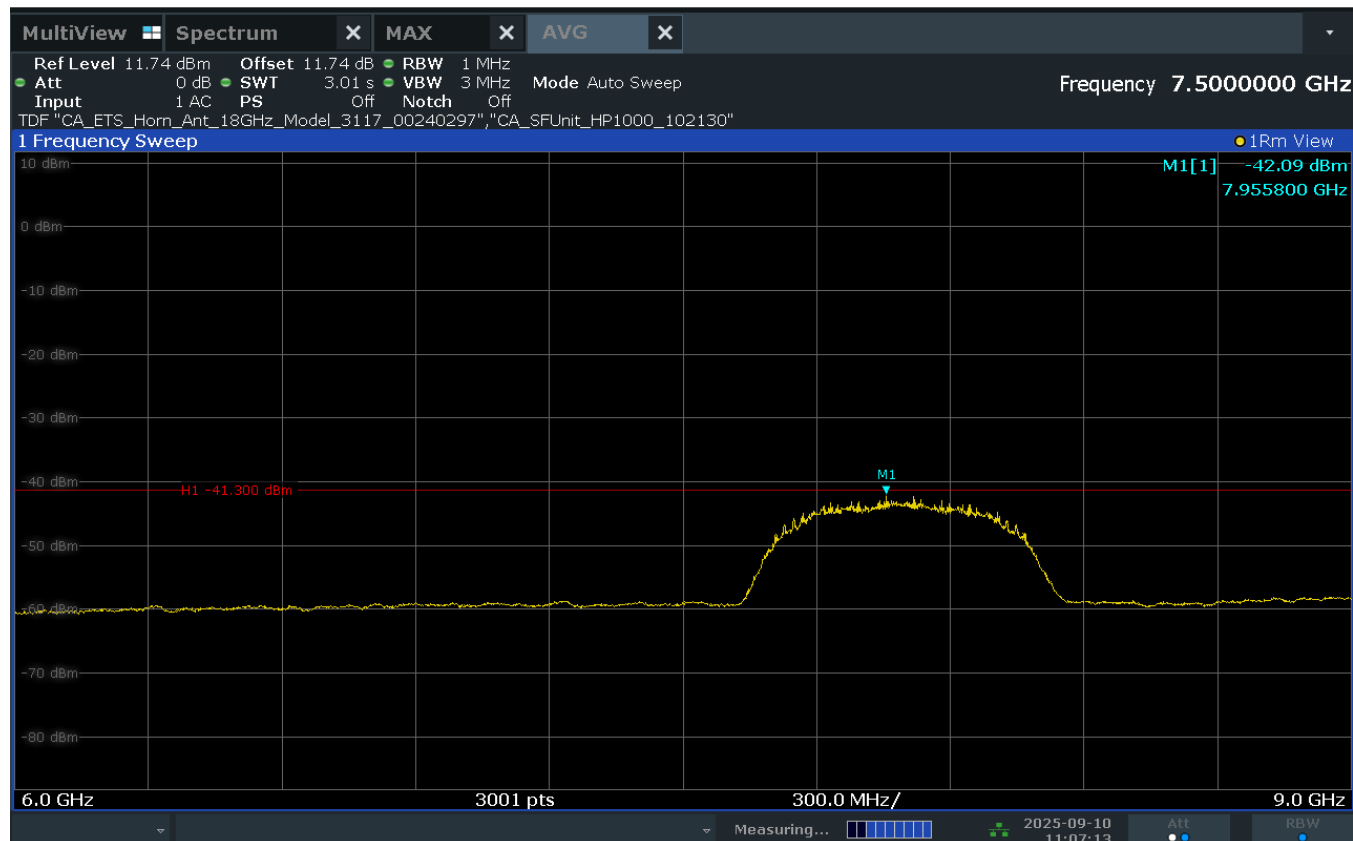

Plot 7-4. Average Radiated Power (Ch. 9, Config 1 /Payload 125B)

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 23 of 42

V 10.6 08/28/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.5 Cease Transmission Time

§15.519(a)(1); RSS-220 [5.3.1(b)]

Test Overview and Limit

A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

Test Procedures Used

KDB 393764 D01 v02r01

Test Settings

1. RBW = 1MHz
2. VBW = 3MHz
3. Span = Zero Span Mode
4. Sweep time shall be sufficient to demonstrate EUTs compliance with the rule part.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

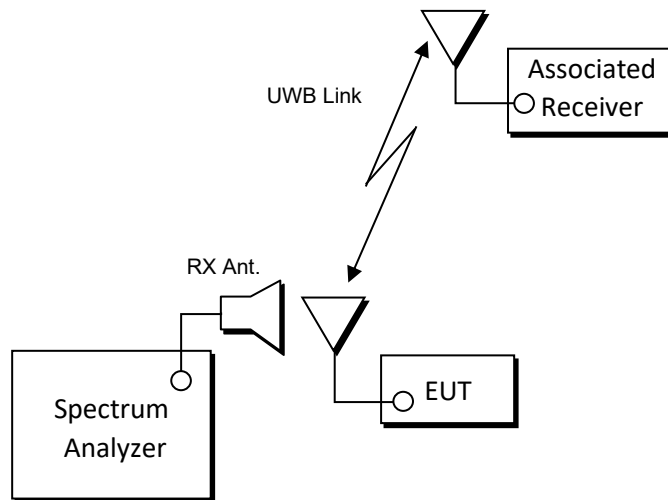


Figure 7-4. Test Setup

FCC ID: BCGA2937 IC: 579C-A2937	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 24 of 42

V 10.6 08/28/2023

Test Configurations

The EUT was monitored under the following test configurations:

- Mode 1: EUT initiates the UWB link to the associated receiver (phone),
 - Associated receiver ends the link, and EUT ceases transmission of any information other than periodic signals (polling) for use in the establishment or re-establishment of a communications link with an associated receiver

Result


Parameter	Limit	Result
Cessation Time - Mode1	1) The UWB intentional radiator shall cease transmission within 10 seconds 2) An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.	Pass

Plots Description

- Cessation Time - Mode1 plot:
 - Marker 1 shows stop time of sending acknowledgement from the associated receiver. UWB Transmission ceases promptly.
 - Marker 2 is placed to show that UWB Cease Tx has stopped before the maximum 10 s limit.
- Zoom in Cessation Time - Mode1 plot:
 - Marker 1 and Marker 3 show EUT polling traffic level
 - Marker 2 shows Associated receiver (Phone) acknowledgement traffic level


FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 25 of 42

V 10.6 08/28/2023

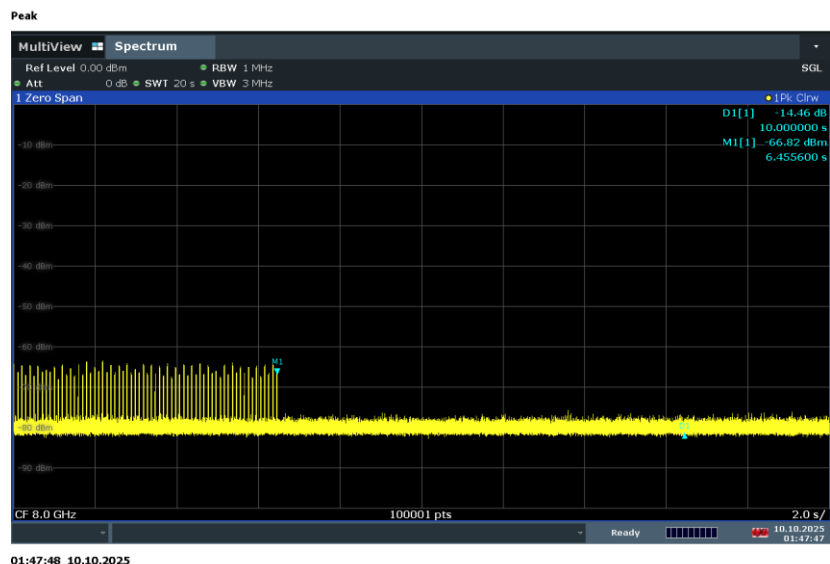

01:47:48 10.10.2025

Plot 7-5. Cessation Time – Mode1 (Ch. 9, 8 GHz)

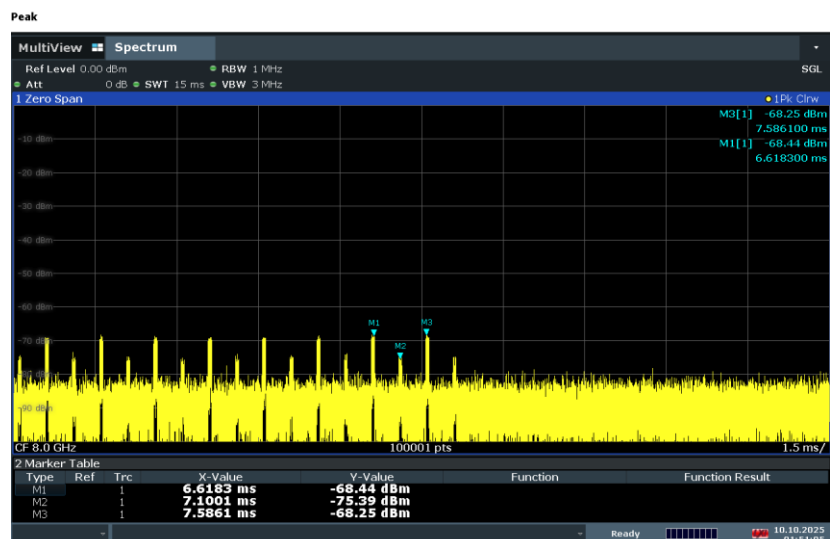

01:51:05 10.10.2025

Plot 7-6. Zoom in Cessation Time – Mode1 (Ch. 9, 8 GHz)

FCC ID: BCGA2937 IC: 579C-A2937	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 26 of 42

V 10.6 08/28/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.6 Radiated Spurious Emissions Measurements – Above 960MHz

§15.519 (c) §15.519 (d); RSS-220 [5.3.1(d)] RSS-220 [5.3.1(e)]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions must not exceed the average limits shown in Table 7-8 and Table 7-9 per Section 15.519 (C) and RSS-220[5.3.1(d)] when measured using a resolution bandwidth of 1 MHz:

Frequency [MHz]	EIRP [dBm]
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
Above 10600	-61.3

Table 7-8. FCC 15.519 Radiated Spurious Emissions Limits

Frequency [MHz]	EIRP [dBm]
960-1610	-75.3
1610-4750	-70.0
4750-10600	-41.3
Above 10600	-61.3

Table 7-9. RSS-220 Radiated Spurious Emissions Limits

All out of band emissions must not exceed the average limits shown in Table 7-10 per Section 15.519 (d) and RSS-220(5.3.1)(e) when measured using a resolution bandwidth greater than or equal to 1 kHz. The measurements shall demonstrate compliance with the stated limits at whatever resolution bandwidth is used.

Frequency [MHz]	EIRP [dBm]
1164-1240	-85.3
1559-1610	-85.3

Table 7-10. FCC 15.519/RSS-220 Radiated Spurious Emissions Limits for GPS frequency bands

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024 – Section 10.3
KDB 393764 D01 v02r01

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 27 of 42

V 10.6 08/28/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Settings

Average RSE Measurements

1. RBW = 1MHz (30kHz for emissions in the GPS band)
2. VBW = 3MHz (100kHz for emissions in the GPS band)
3. Detector = Average (RMS)
4. Sweep time = No more than a 1 ms integration period over each measurement bin
5. Trace mode = Max hold
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

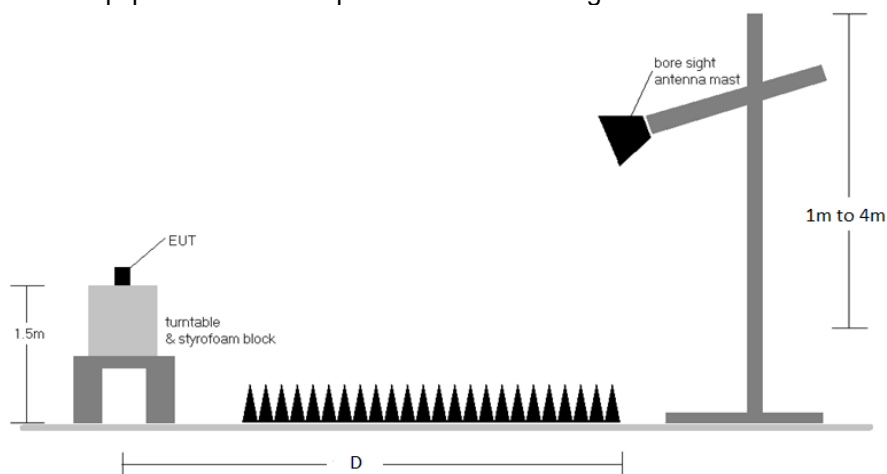


Figure 7-5. Radiated Test Setup - Above 960MHz

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported.
2. This unit was tested with a disposable battery.
3. The RBW for measurements in the GPS Bands were reduced to 30kHz in order to show compliance.
4. D is the measurement test distance and emissions from 960MHz - 18GHz were measured at 0.6 meter test distance while emissions above 18GHz were measured at 0.5 meter test distance with the application of a distance correction factor.
5. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
6. 6GHz - 9GHz RSE is covered in EIRP section (Section 7.4).

FCC ID: BCGA2937 IC: 579C-A2937	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 28 of 42

V 10.6 08/28/2023

Sample Calculations

Determining Spurious Emissions Levels


- $E_{[\text{dB}\mu\text{V/m}]} = \text{Analyzer level}_{[\text{dBm}]} + 107 + \text{AFCL}_{[\text{dB/m}]}$
- $\text{Spurious Emission Level}_{[\text{dBm}]} = E_{[\text{dB}\mu\text{V/m}]} + 20 \log(D_{\text{Meas}}) - 104.8$
- $\text{Spurious Emission Level}_{[\text{dBm}]} = \text{Analyzer Level}_{[\text{dBm}]} + \text{AFCL}_{[\text{dB/m}]} + \text{Conversion Factor}_{[\text{dB}]}$
- $\text{AFCL}_{[\text{dB/m}]} = (\text{Antenna Factor}_{[\text{dB/m}]} + \text{Cable Loss}_{[\text{dB}]} + \text{Attenuator}_{[\text{dB}]} - \text{Preamplifier Gain}_{[\text{dB}]})$
- $\text{Conversion Factor}_{[\text{dB}]} = 107 - 104.8 + 20 \log(D_{\text{Meas}})$
- $\text{Margin}_{[\text{dB}]} = \text{Spurious Emission Level}_{[\text{dBm}]} - \text{Limit}_{[\text{dBm}]}$

FCC ID: BCGA2937 IC: 579C-A2937	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 29 of 42

V 10.6 08/28/2023


Radiated Spurious Emission Measurements (960MHz – 18GHz)

§15.519(c); RSS-220 [5.3.1(d)]

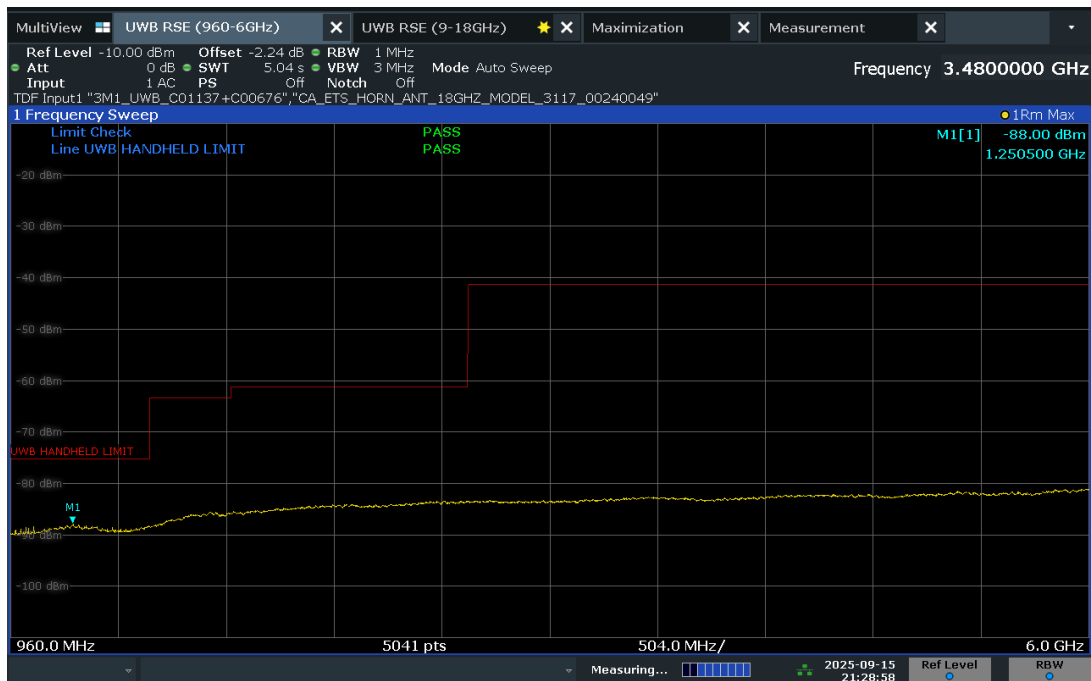

09:28:59 PM 09/15/2025

Plot 7-7. FCC Radiated Spurious Emission 960-6000MHz (Ch. 9, Config 1, Payload 125B Ant. Pol. H)

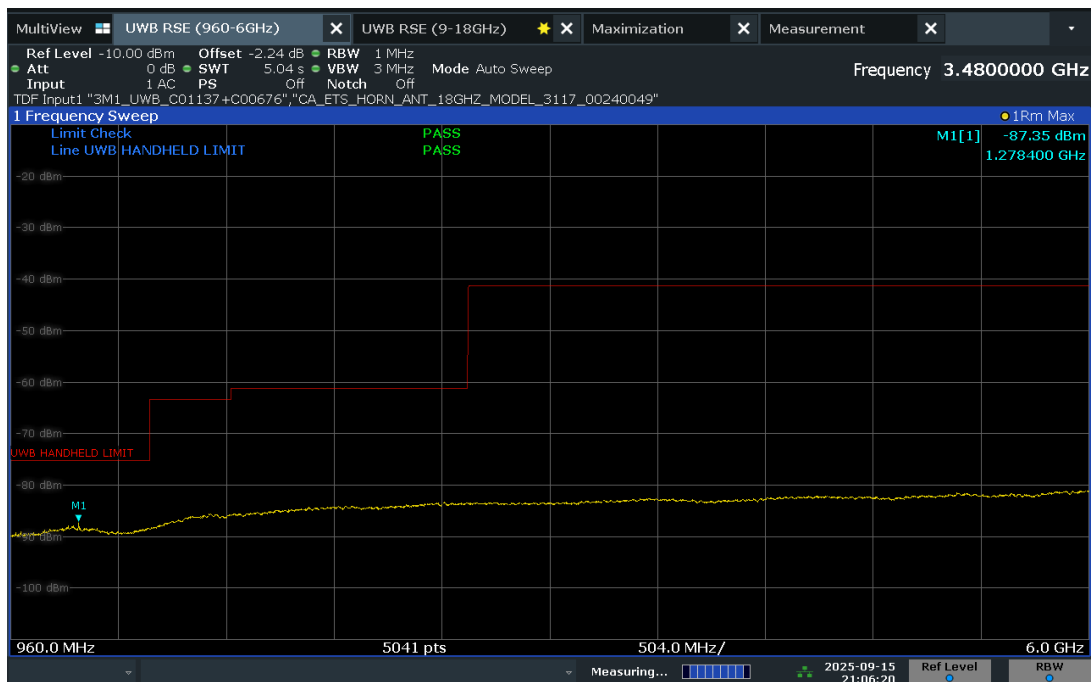


09:06:21 PM 09/15/2025

Plot 7-8. FCC Radiated Spurious Emission 960-6000MHz (Ch.9, Config 1, Payload 125B Ant. Pol. V)

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 30 of 42


V 10.6 08/28/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

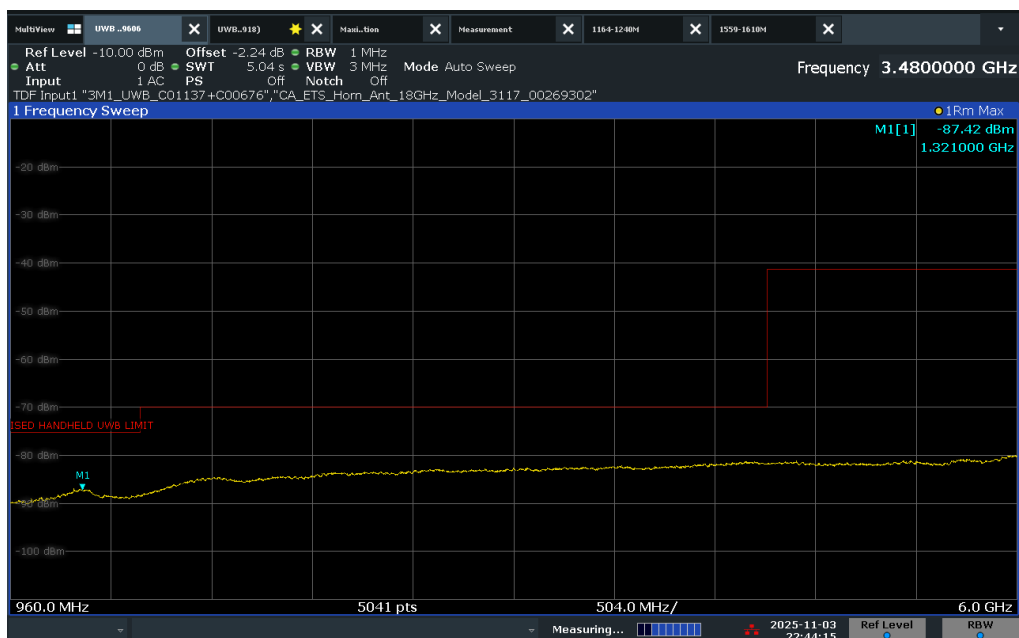

10:44:15 PM 11/03/2025

Plot 7-9. ISD Radiated Spurious Emission 960-6000MHz (Ch. 9, Config 1, Payload 125B Ant. Pol. H)

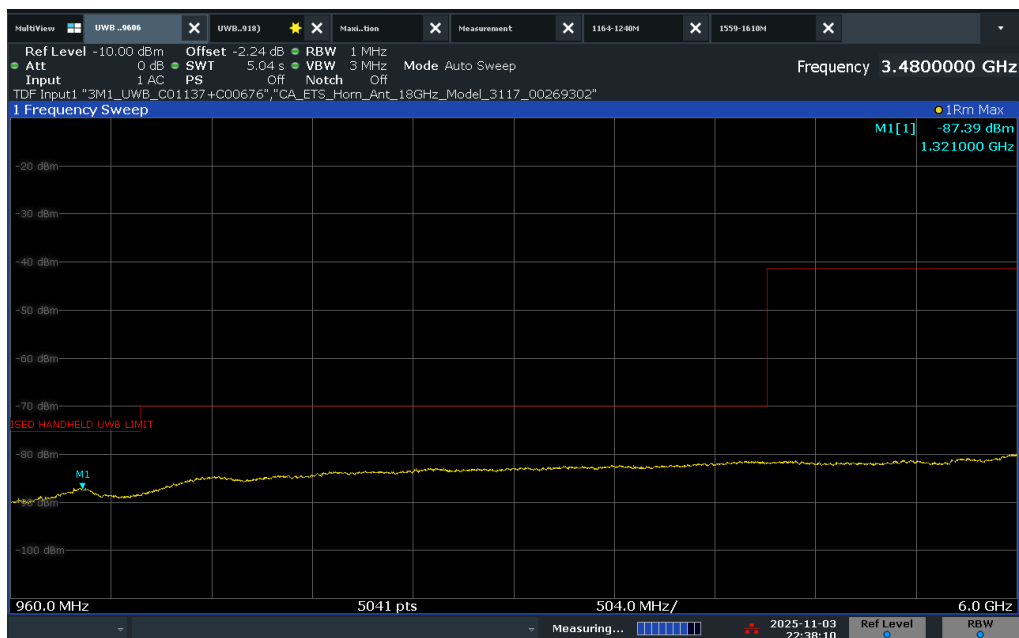


10:38:10 PM 11/03/2025

Plot 7-10. ISD Radiated Spurious Emission 960-6000MHz (Ch.9, Config 1, Payload 125B Ant. Pol. V)

FCC ID: BCGA2937 IC: 579C-A2937	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 31 of 42


V 10.6 08/28/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

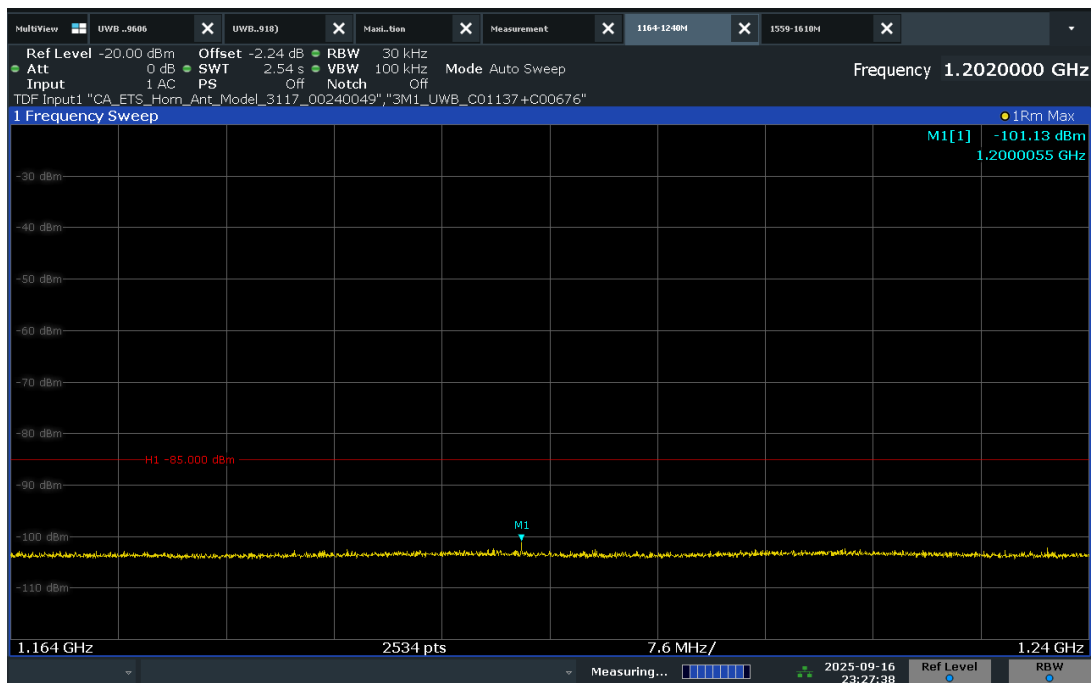

11:27:39 PM 09/16/2025

Plot 7-11. Radiated Spurious Emission 1164-1240MHz (Ch. 9, Config 1, Payload 125B Ant. Pol. H)

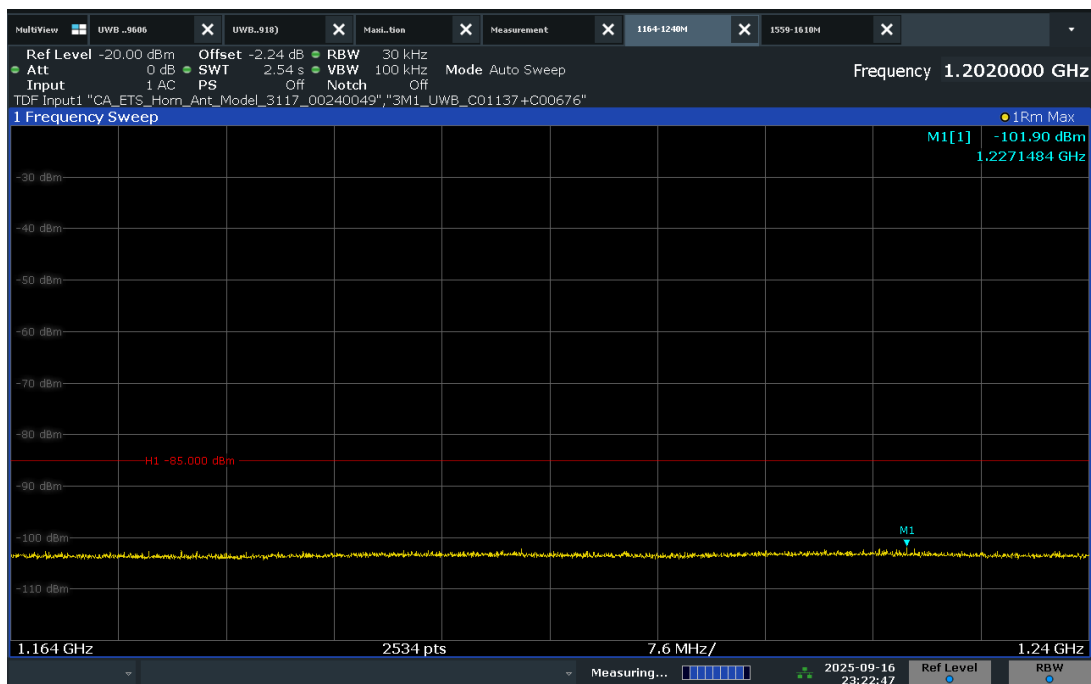

11:22:48 PM 09/16/2025

Plot 7-12. Radiated Spurious Emission 1164-1240MHz (Ch. 9, Config 1, Payload 125B Ant. Pol. V)


FCC ID: BCGA2937 IC: 579C-A2937	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 32 of 42

V 10.6 08/28/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



Plot 7-13. Radiated Spurious Emission 1559-1610MHz (Ch. 9, Config 1, Payload 125B Ant. Pol. H)

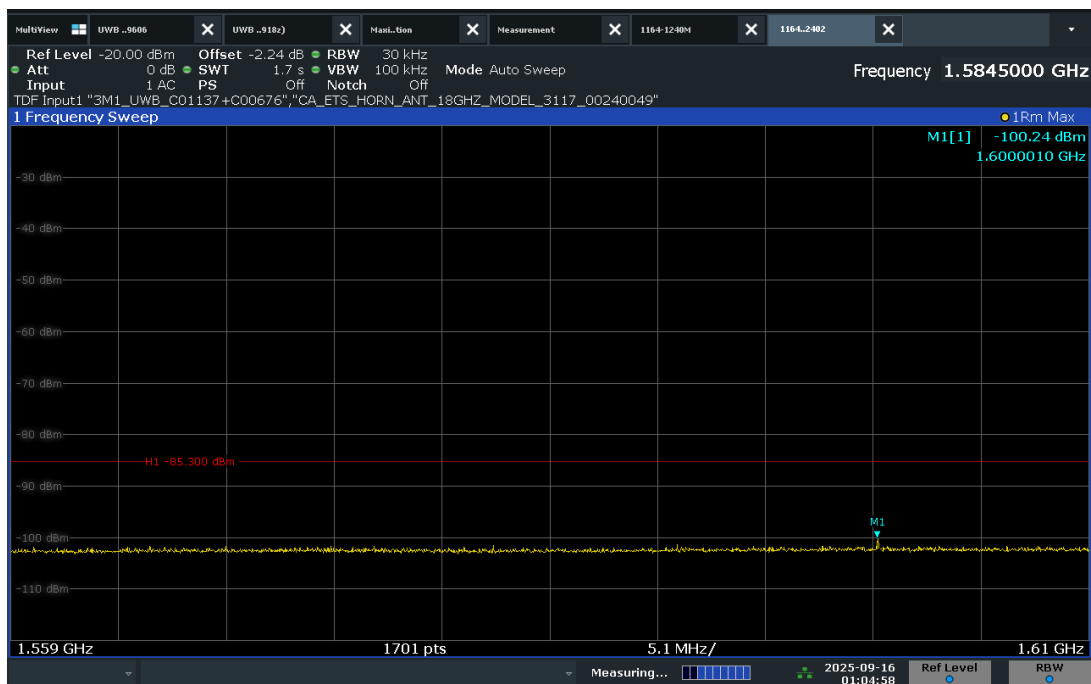


Plot 7-14. Radiated Spurious Emission 1559-1610MHz (Ch. 9, Config 1, Payload 125B Ant. Pol. V)

FCC ID: BCGA2937 IC: 579C-A2937	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 33 of 42


V 10.6 08/28/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

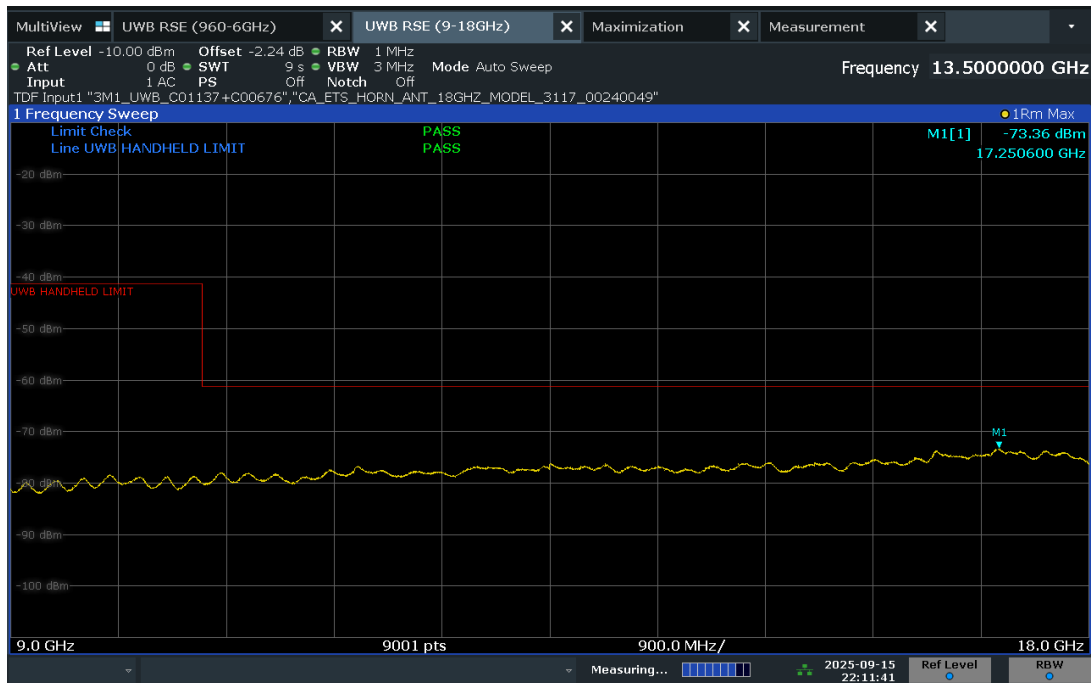

10:11:41 PM 09/15/2025

Plot 7-15. Radiated Spurious Emission 9-18GHz (Ch. 9, Config 1, Payload 125B Ant. Pol. H)

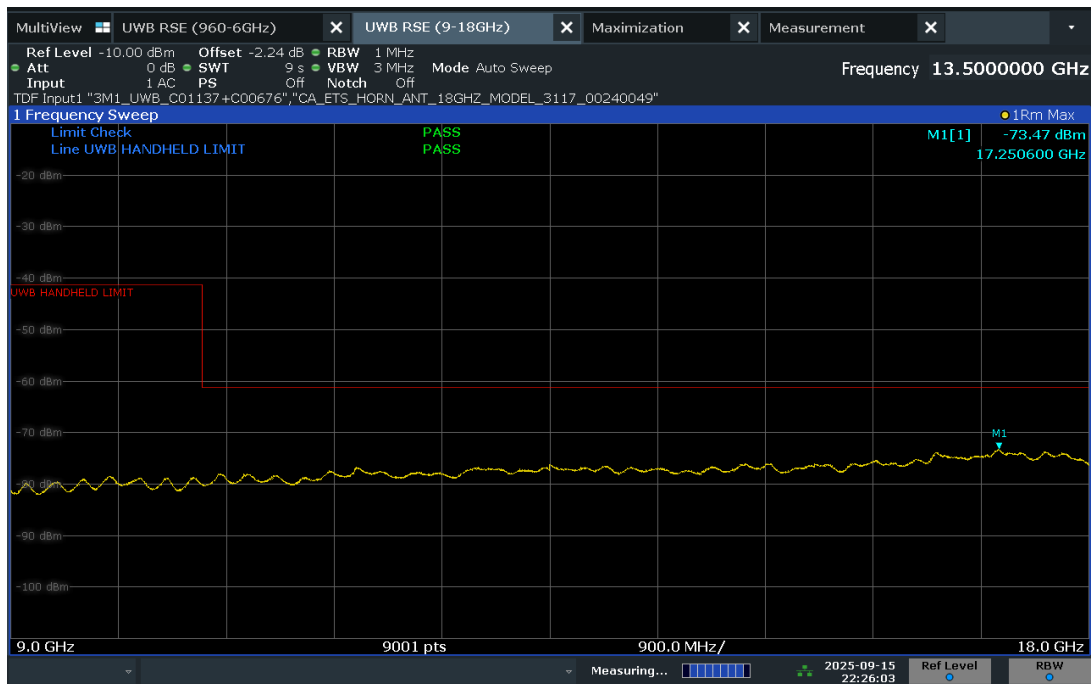

10:26:04 PM 09/15/2025

Plot 7-16. Radiated Spurious Emission 9-18GHz (Ch. 9, Config 1, Payload 125B Ant. Pol. V)


FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 34 of 42

V 10.6 08/28/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Radiated Spurious Emissions (Above 18GHz)

§15.519 (c); RSS-220 [5.3.1(d)]

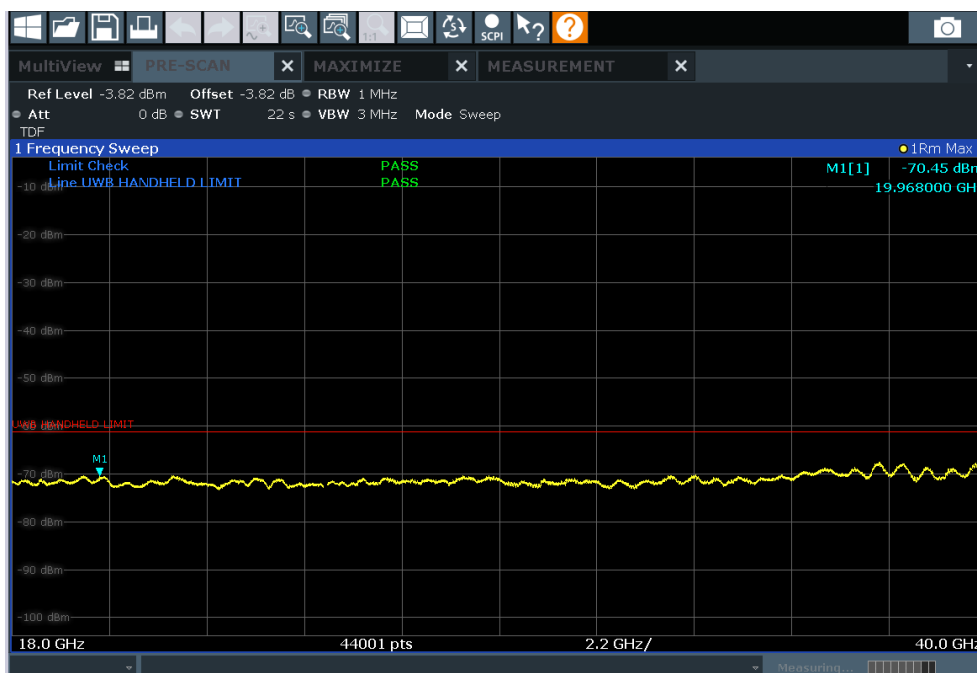

Plot 7-17. Radiated Spurious Emission 18-40GHz (Ch. 9, Config 1, Payload 125B Ant. Pol. H)

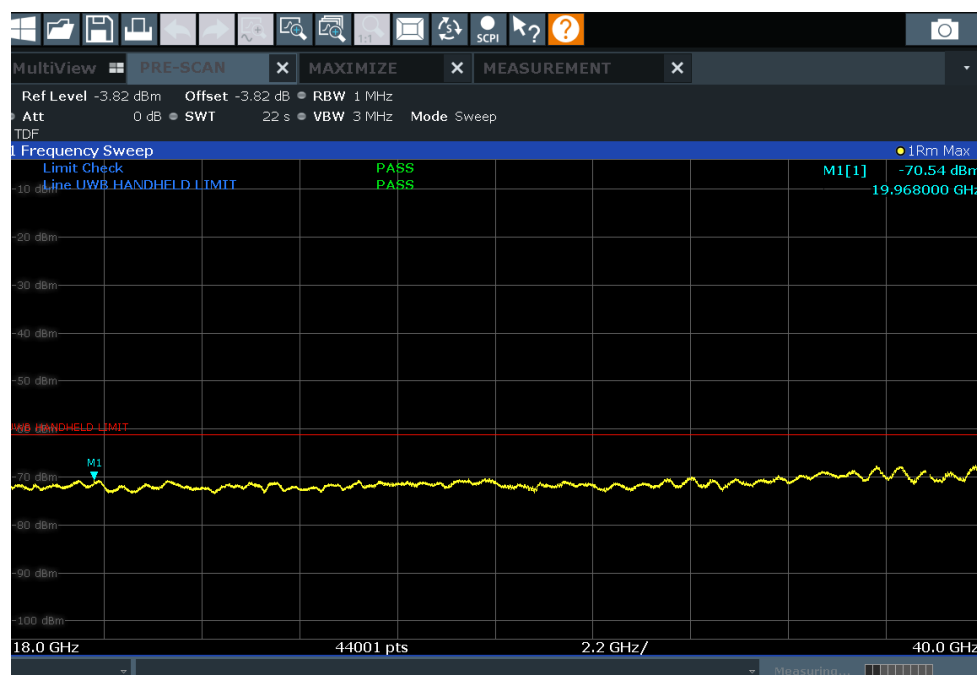

Plot 7-18. Radiated Spurious Emission 18-40GHz (Ch. 9, Config 1, Payload 125B Ant. Pol. V)

FCC ID: BCGA2937 IC: 579C-A2937	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 35 of 42

V 10.6 08/28/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Radiated Spurious Emission Measurements (960MHz-18GHz)

§15.519(c); RSS-220 [5.3.1(d)]

Distance of Measurements: 0.6 Meters
 Operating Frequency: 8000 MHz
 Channel: 9
 Config: 1
 Payload: 125B

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Conversion Factor [dB]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1250	Avg	H	-	-	-79.70	-6.06	-2.24	-88.00	-75.30	-12.70
1997	Avg	H	-	-	-80.44	-3.02	-2.24	-85.70	-61.30	-24.40
2027	Avg	H	-	-	-80.71	-2.81	-2.24	-85.76	-61.30	-24.46
10401	Avg	H	-	-	-83.83	4.94	-2.24	-81.13	-41.30	-39.83
14202	Avg	H	-	-	-85.14	8.33	-2.24	-79.05	-61.30	-17.75
17375	Avg	H	-	-	-85.50	13.54	-2.24	-74.20	-61.30	-12.90

Table 7-11. Radiated Spurious Emission Measurements 960MHz-18GHz (FCC)

Distance of Measurements: 0.6 Meters
 Operating Frequency: 8000 MHz
 Channel: 9
 Config: 1
 Payload: 125B

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Conversion Factor [dB]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1256	Avg	H	-	-	-80.06	-6.01	-2.24	-88.31	-75.30	-13.01
2001	Avg	H	-	-	-80.37	-2.99	-2.24	-85.59	-70.00	-15.59
2049	Avg	H	-	-	-81.09	-2.71	-2.24	-86.04	-70.00	-16.04
10376	Avg	H	-	-	-83.80	5.02	-2.24	-81.02	-41.30	-39.72
14104	Avg	H	-	-	-83.31	7.80	-2.24	-77.75	-61.30	-16.45
16855	Avg	H	-	-	-86.02	13.38	-2.24	-74.88	-61.30	-13.58

Table 7-12. Radiated Spurious Emission Measurements 960MHz-18GHz (ISED)

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 36 of 42

V 10.6 08/28/2023

Radiated Spurious Emission Measurements (Above 18GHz)

§15.519 (c); RSS-220 [5.3.1(d)]

Distance of Measurements: 0.5 Meters
 Operating Frequency: 8000 MHz
 Channel: 9
 Config: 1
 Payload: 125B

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Conversion Factor [dB]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
19968	Avg	H	150	168	-57.95	-8.01	-3.82	-69.78	-61.30	-8.48
23196	Avg	H	-	-	-61.97	-6.08	-3.82	-71.87	-61.30	-10.57
28350	Avg	H	-	-	-64.99	-3.11	-3.82	-71.92	-61.30	-10.62
31988	Avg	H	-	-	-64.63	-3.39	-3.82	-71.84	-61.30	-10.54
37010	Avg	H	-	-	-59.42	-4.60	-3.82	-67.84	-61.30	-6.54

Table 7-13. Radiated Spurious Emission Measurements 18-40GHz

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 37 of 42

V 10.6 08/28/2023

7.7 Radiated Spurious Emissions Measurements – Below 960MHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-14 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-14. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 + Cor. 1:2023 + C63.10a:2024 + Errata to C63.10a:2024

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 38 of 42

V 10.6 08/28/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

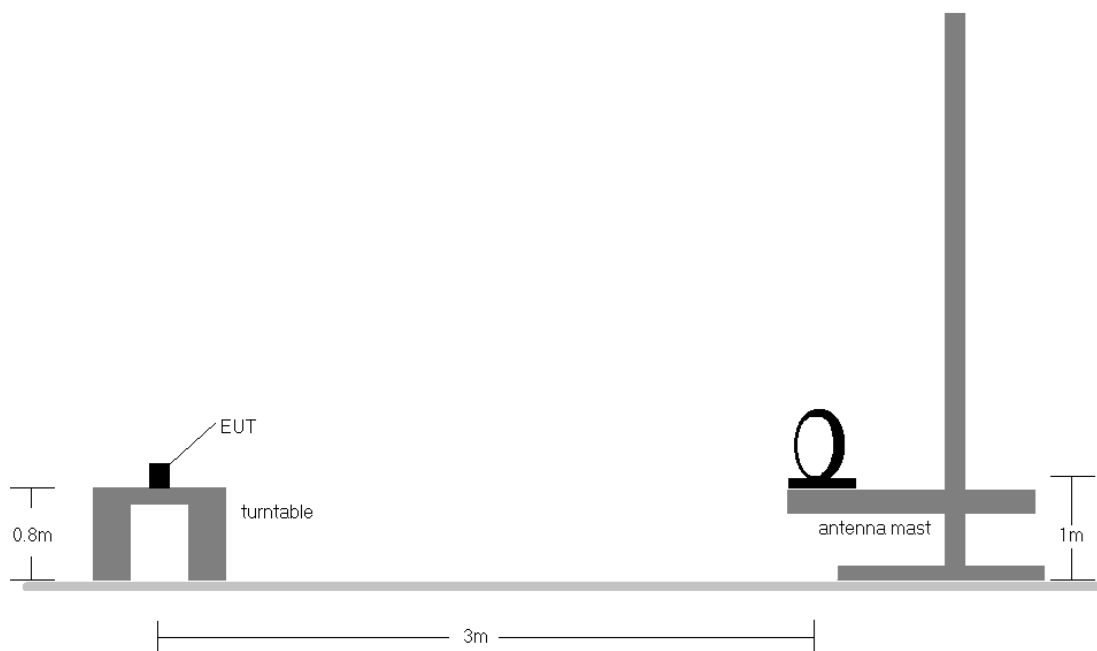


Figure 7-6. Radiated Test Setup < 30Mhz

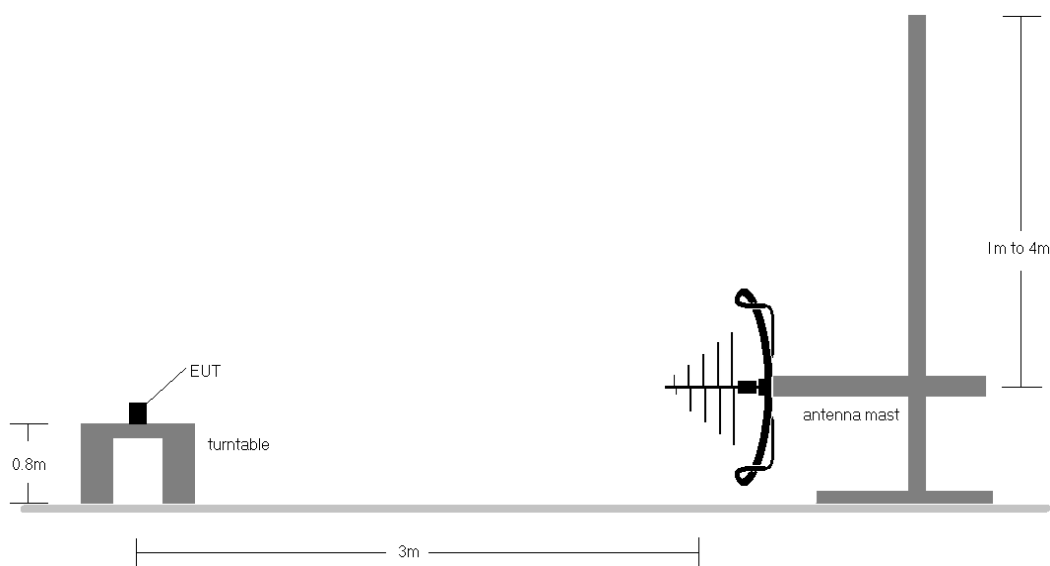


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCGA2937 IC: 579C-A2937	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 39 of 42

V 10.6 08/28/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-14.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with a disposable battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All modes of operation were investigated and the worst-case emissions are reported.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level $_{[dB_{\mu V/m}]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = (\text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} + \text{Attenuator }_{[dB]}) - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB_{\mu V/m}]} - \text{Limit }_{[dB_{\mu V/m}]}$

FCC ID: BCGA2937 IC: 579C-A2937	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 40 of 42

V 10.6 08/28/2023

Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

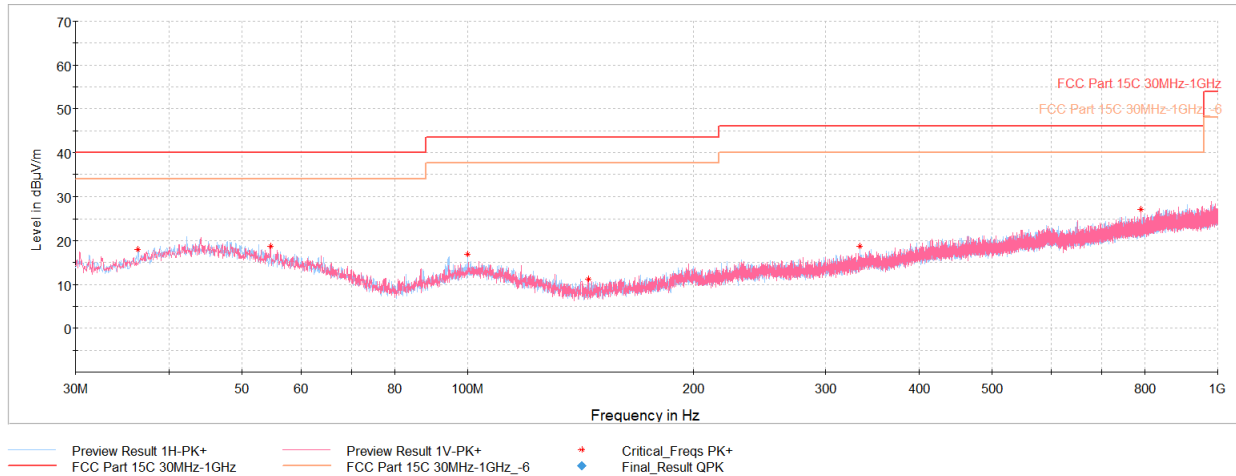

Plot 7-19. Radiated Spurious Emission 30-960MHz (Ch. 9, Config 1, Payload 125B with disposable battery)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV]	Margin [dB]
36.35	Max Peak	H	100	323	-77.64	-11.28	18.08	40.00	-21.92
54.64	Max Peak	V	300	251	-77.61	-10.57	18.82	40.00	-21.18
99.99	Max Peak	H	300	144	-76.34	-13.75	16.91	43.52	-26.61
144.61	Max Peak	V	100	357	-78.02	-17.83	11.15	43.52	-32.37
332.79	Max Peak	H	300	29	-77.26	-11.04	18.70	46.02	-27.32
788.88	Max Peak	V	100	175	-77.17	-2.78	27.05	46.02	-18.97

Table 7-15. Radiated Spurious Emission 30-960MHz (Ch. 9, Config 1, Payload 125B with disposable battery)

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 41 of 42

V 10.6 08/28/2023

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Location Tracking Tag FCC ID: BCGA2937 and IC: 579C-A2937** is in compliance with Part 15 Subpart C (15.519) of the FCC Rules and RSS-220 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA2937 IC: 579C-A2937		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170045-02-R6.BCG	Test Dates: 08/05/2025 - 10/15/2025	EUT Type: Location Tracking Tag	Page 42 of 42

V 10.6 08/28/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.