



7.6.21 CDD Diversity Radiated Band Edge Measurements (80MHz BW)


RU26

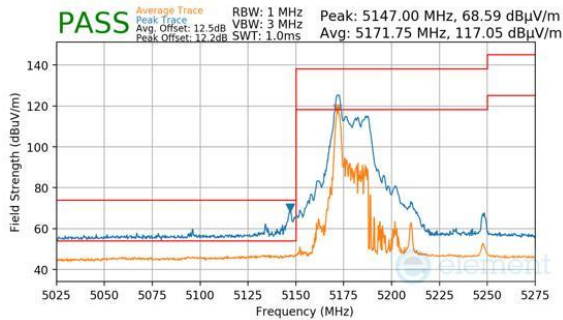


Plot 7-1066. CDD Diversity (Peak & Average, RU26, Index 0, Ch.42, MCS11)

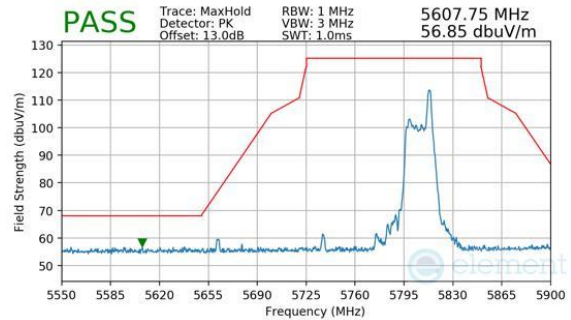


Plot 7-1069. CDD Diversity (Peak, RU26, Index 36, Ch.155, MCS11)

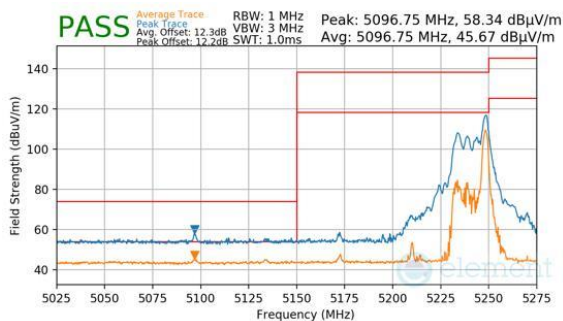


Plot 7-1067. CDD Diversity (Peak & Average, RU26, Index 36, Ch.42, MCS11)

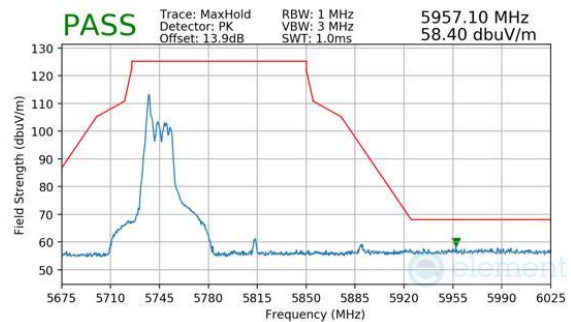

Plot 7-1070. CDD Diversity (Peak, RU26, Index 0, Ch.155, MCS11)

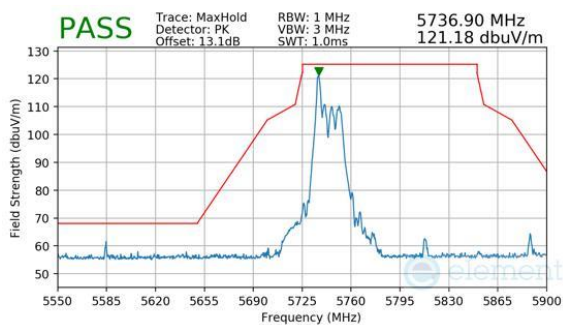


Plot 7-1068. CDD Diversity (Peak, RU26, Index 0, Ch.155, MCS11)

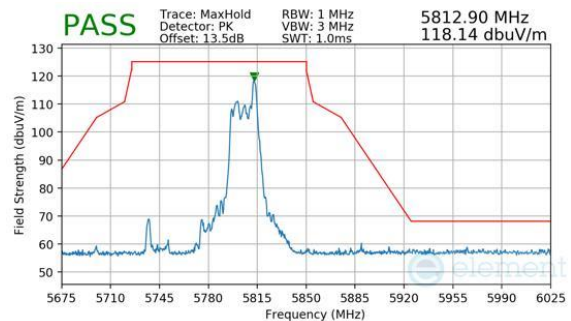


Plot 7-1071. CDD Diversity (Peak, RU26, Index 36, Ch.155, MCS11)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 333 of 375


RU52

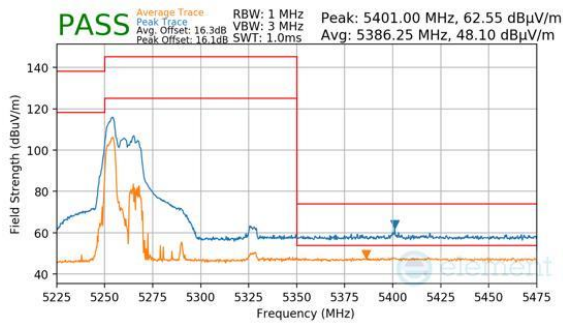


Plot 7-1072. CDD Diversity (Peak & Average, RU52, Index 37, Ch.58, MCS11)

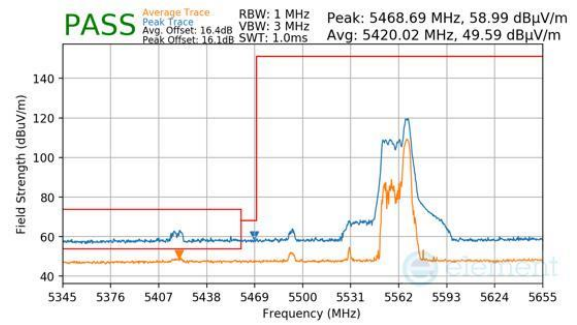


Plot 7-1075. CDD Diversity (Peak & Average, RU52, Index 52, Ch.106, MCS11)

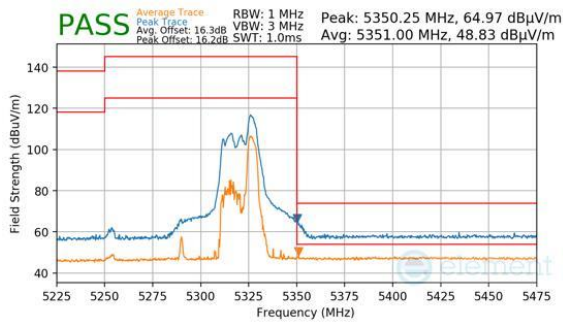


Plot 7-1073. CDD Diversity (Peak & Average, RU52, Index 52, Ch.58, MCS11)

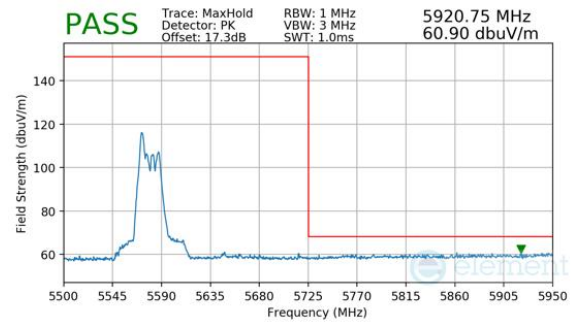

Plot 7-1076. (FCC Only) CDD Diversity (Peak, RU52, Index 37, Ch.122, MCS11)

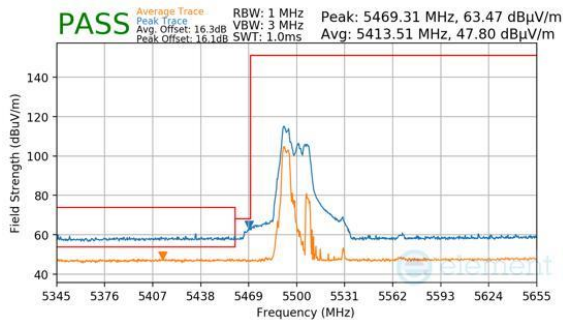


Plot 7-1074. CDD Diversity (Peak & Average, RU52, Index 37, Ch.106, MCS11)

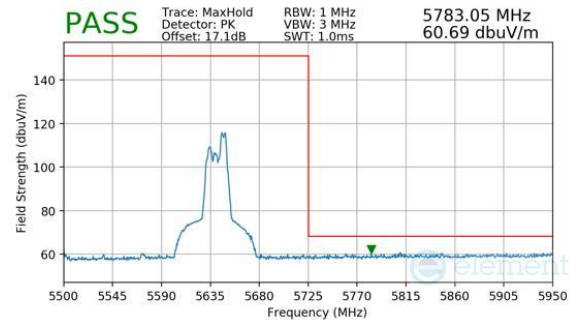


Plot 7-1077. (FCC Only) CDD Diversity (Peak, RU52, Index 52, Ch.122, MCS11)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 334 of 375


MRU

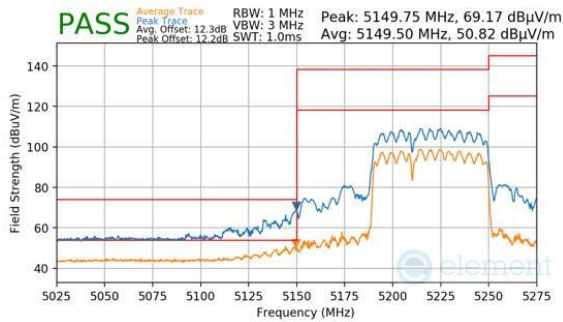


Plot 7-1078. CDD Diversity (Peak & Average, RU484+242, Index 90, Ch.42, MCS11)

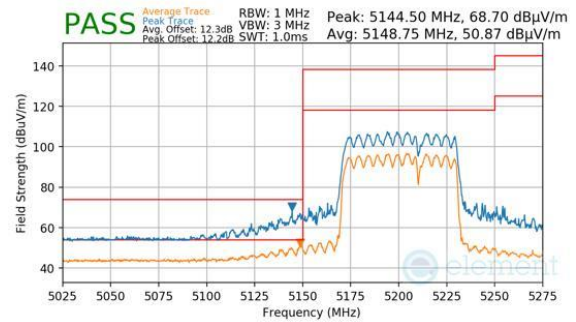


Plot 7-1081. CDD Diversity (Peak & Average, RU484+242, Index 93, Ch.42, MCS11)

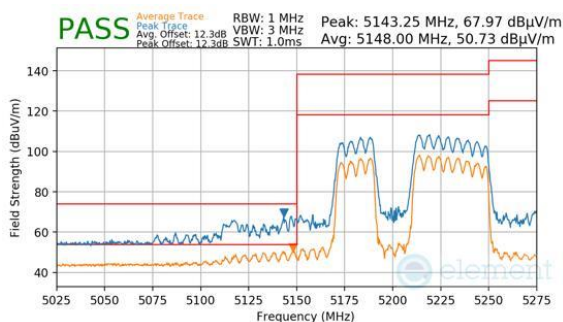


Plot 7-1079. CDD Diversity (Peak & Average, RU484+242, Index 91, Ch.42, MCS11)

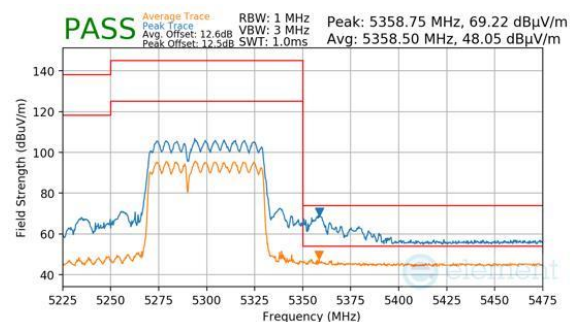

Plot 7-1082. CDD Diversity (Peak & Average, RU484+242, Index 90, Ch.58, MCS11)

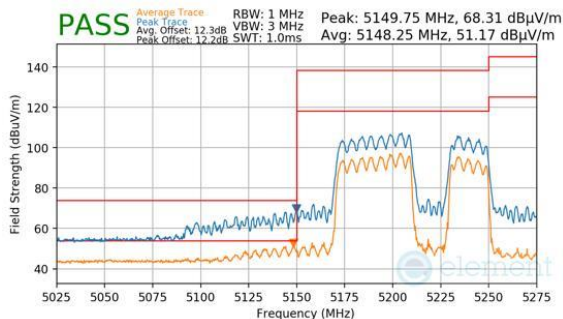


Plot 7-1080. CDD Diversity (Peak & Average, RU484+242, Index 92, Ch.42, MCS11)

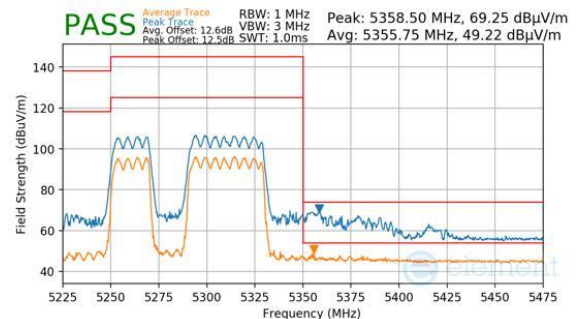


Plot 7-1083. CDD Diversity (Peak & Average, RU484+242, Index 91, Ch.58, MCS11)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 335 of 375

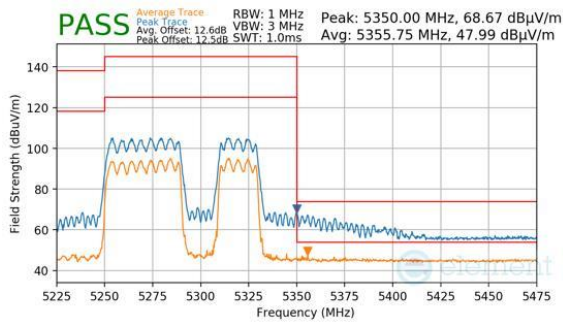


Plot 7-1084. CDD Diversity (Peak & Average, RU484+242, Index 92, Ch.58, MCS11)

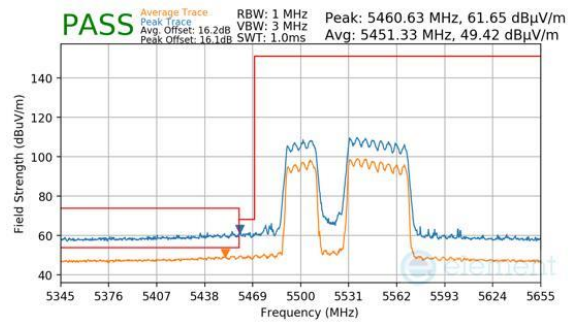


Plot 7-1087. CDD Diversity (Peak & Average, RU484+242, Index 91, Ch.106, MCS11)

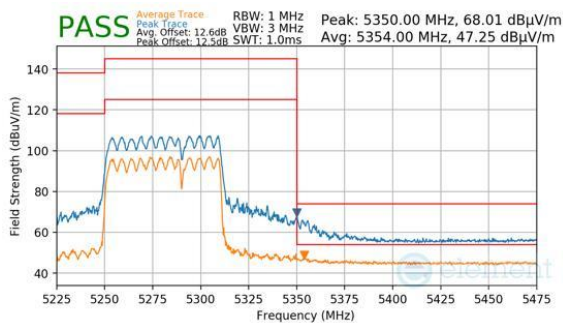


Plot 7-1085. CDD Diversity (Peak & Average, RU484+242, Index 93, Ch.58, MCS11)

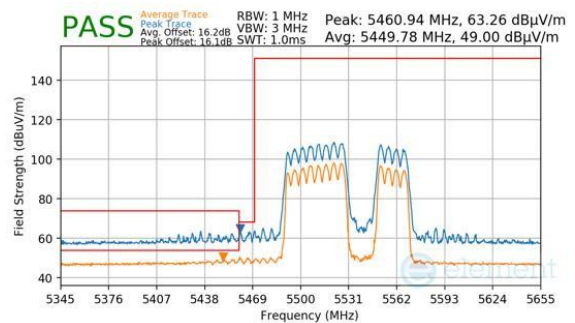

Plot 7-1088. CDD Diversity (Peak & Average, RU484+242, Index 92, Ch.106, MCS11)

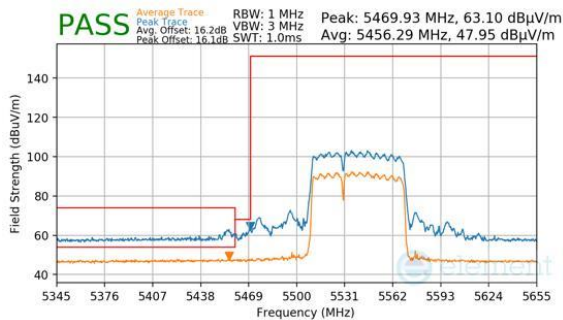


Plot 7-1086. CDD Diversity (Peak & Average, RU484+242, Index 90, Ch.106, MCS11)

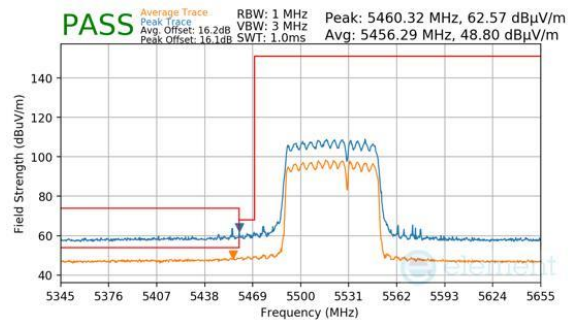


Plot 7-1089. CDD Diversity (Peak & Average, RU484+242, Index 93, Ch.106, MCS11)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 336 of 375

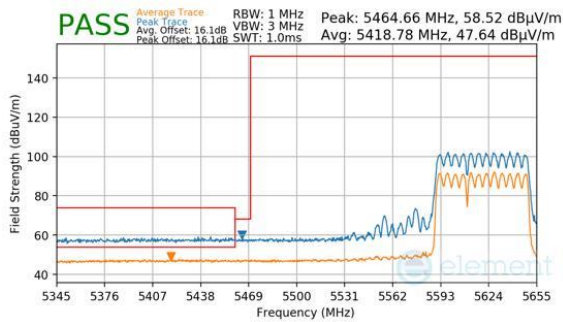


Plot 7-1090. (FCC Only) CDD Diversity (Peak & Average, RU484+242, Index 90, Ch.122, MCS11)

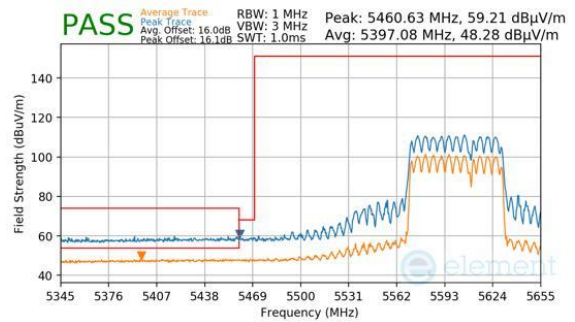


Plot 7-1093. (FCC Only) CDD Diversity (Peak & Average, RU484+242, Index 93, Ch.122, MCS11)

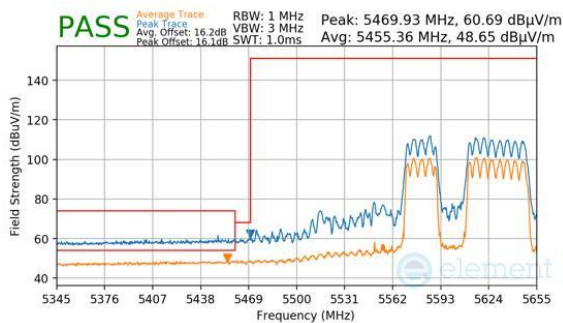


Plot 7-1091. (FCC Only) CDD Diversity (Peak & Average, RU484+242, Index 91, Ch.122, MCS11)

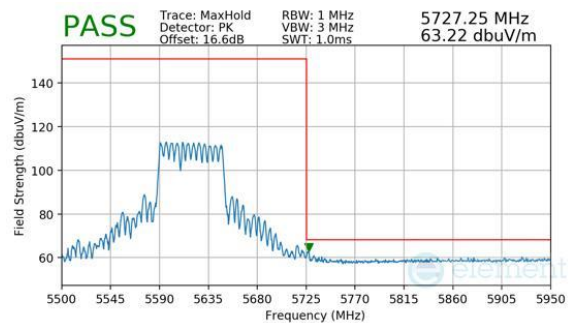

Plot 7-1094. (FCC Only) CDD Diversity (Peak, RU484+242, Index 90, Ch.122, MCS11)

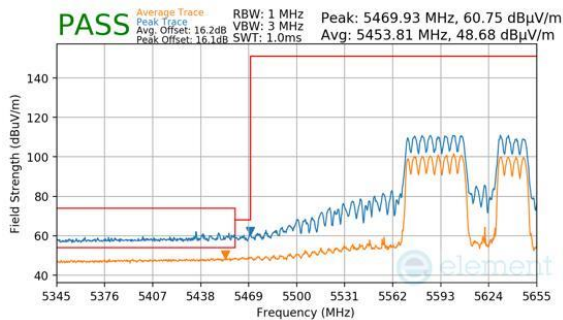


Plot 7-1092. (FCC Only) CDD Diversity (Peak & Average, RU484+242, Index 92, Ch.122, MCS11)

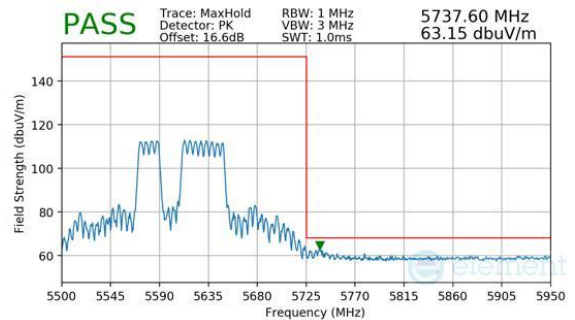


Plot 7-1095. (FCC Only) CDD Diversity (Peak, RU484+242, Index 91, Ch.122, MCS11)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 337 of 375

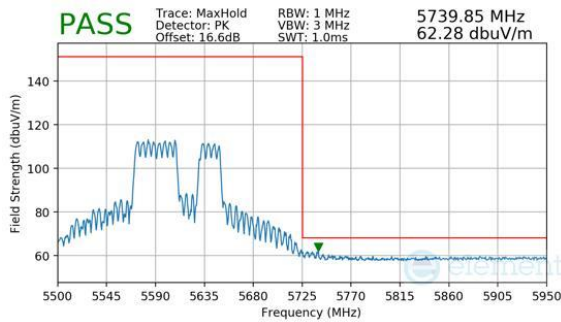


Plot 7-1096. (FCC Only) CDD Diversity (Peak, RU484+242, Index 92, Ch.122, MCS11)

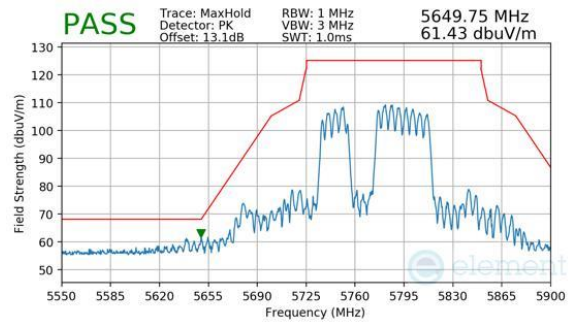


Plot 7-1099. CDD Diversity (Peak, RU484+242, Index 91, Ch.155, MCS11)

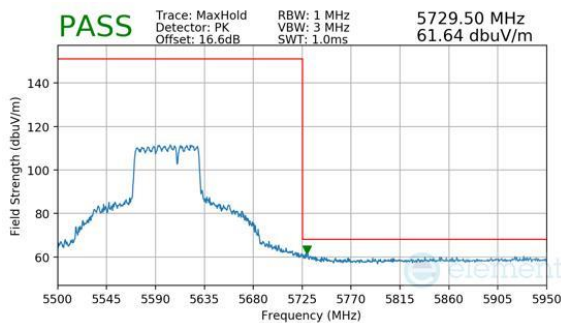


Plot 7-1097. (FCC Only) CDD Diversity (Peak, RU484+242, Index 93, Ch.122, MCS11)

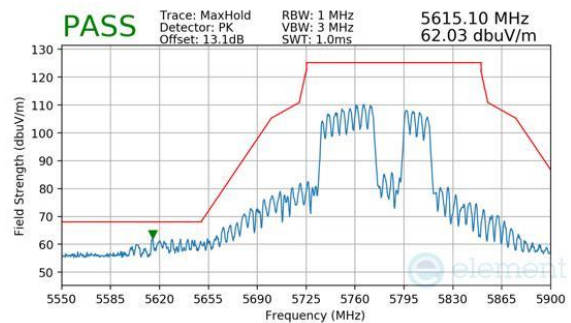

Plot 7-1100. CDD Diversity (Peak, RU484+242, Index 92, Ch.155, MCS11)

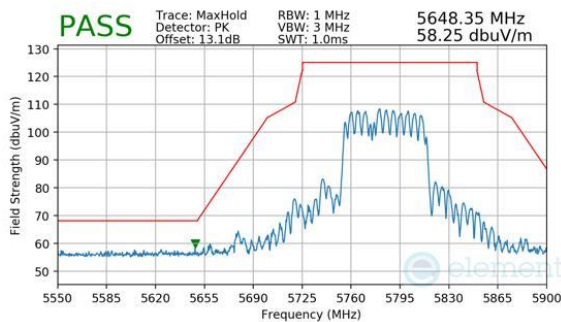


Plot 7-1098. CDD Diversity (Peak, RU484+242, Index 90, Ch.155, MCS11)

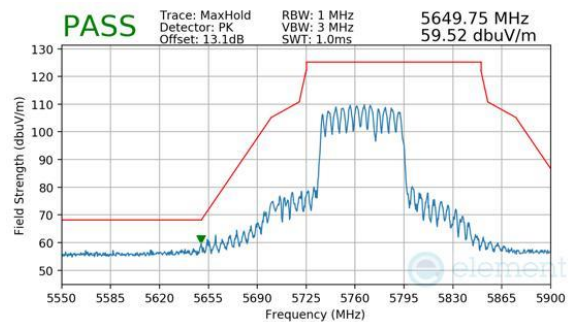


Plot 7-1101. CDD Diversity (Peak, RU484+242, Index 93, Ch.155, MCS11)


FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device		

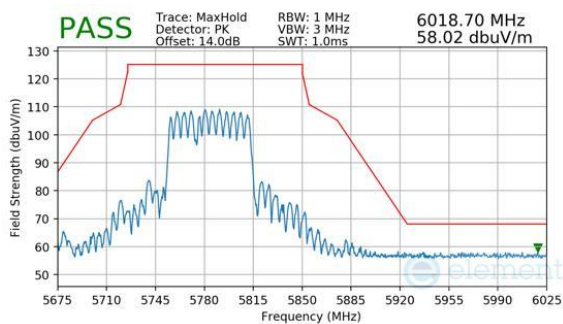


Plot 7-1102. CDD Diversity (Peak, RU484+242, Index 90, Ch.155, MCS11)

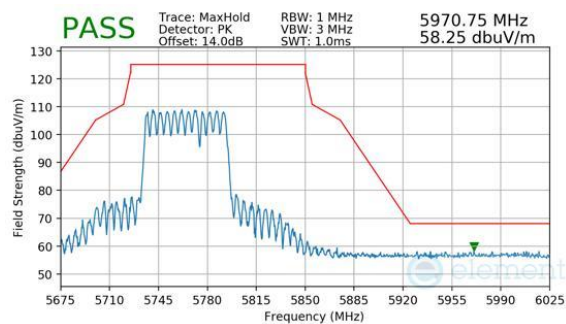

Plot 7-1105. CDD Diversity (Peak, RU484+242, Index 93, Ch.155, MCS11)

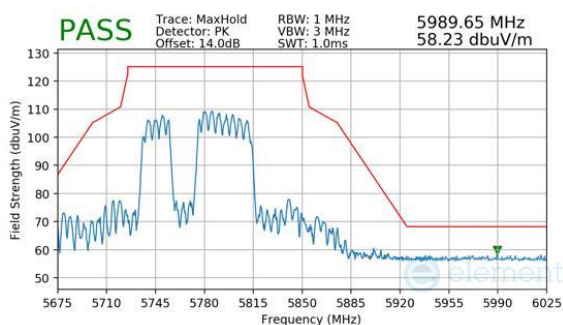


Plot 7-1103. CDD Diversity (Peak, RU484+242, Index 91, Ch.155, MCS11)

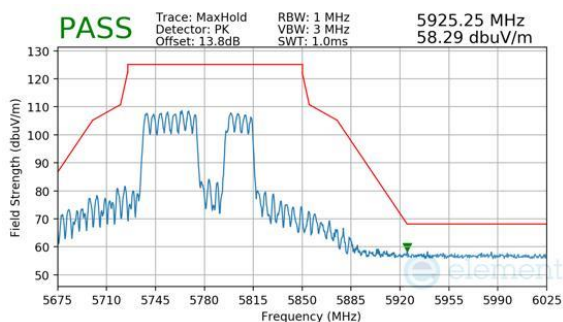


Plot 7-1104. CDD Diversity (Peak, RU484+242, Index 92, Ch.155, MCS11)

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 339 of 375


RU996

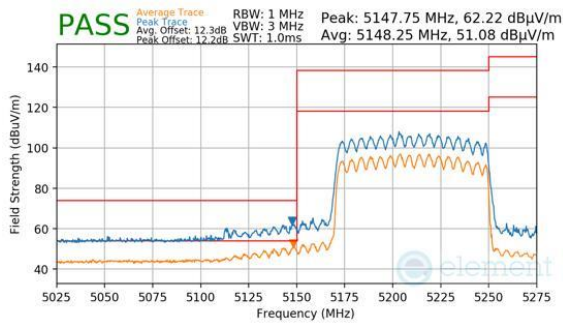


Plot 7-1106. CDD Diversity (Peak & Average, RU996, Index 67, Ch.42, MCS11)

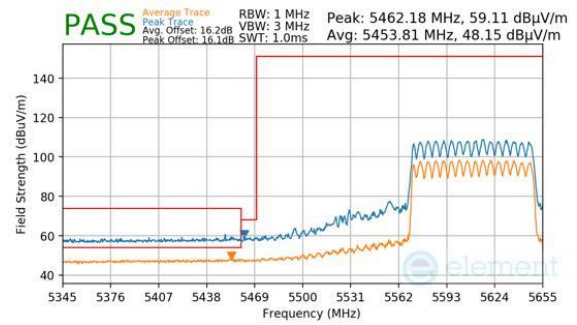


Plot 7-1109. (FCC Only) CDD Diversity (Peak & Average, RU996, Index 67, Ch.122, MCS11)

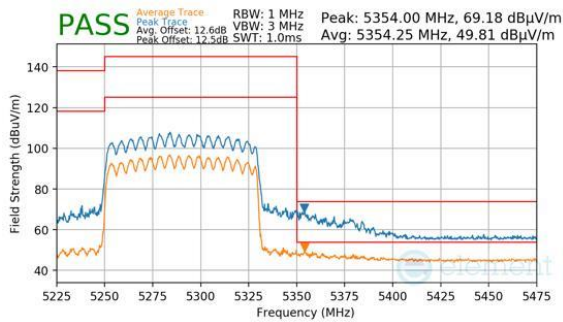


Plot 7-1107. CDD Diversity (Peak & Average, RU996, Index 67, Ch.58, MCS11)

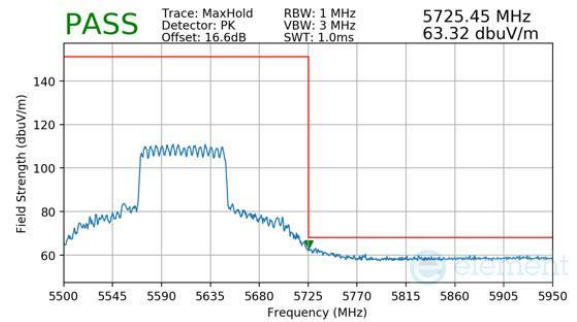

Plot 7-1110. (FCC Only) CDD Diversity (Peak, RU996, Index 67, Ch.122, MCS11)

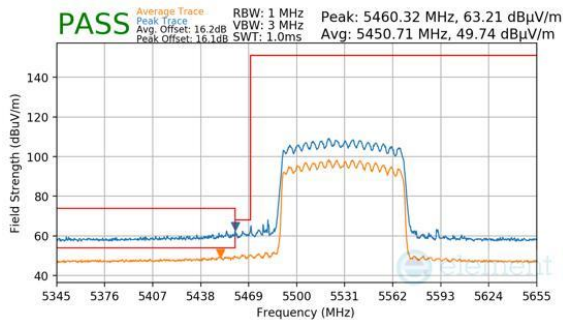


Plot 7-1108. CDD Diversity (Peak & Average, RU996, Index 67, Ch.106, MCS11)

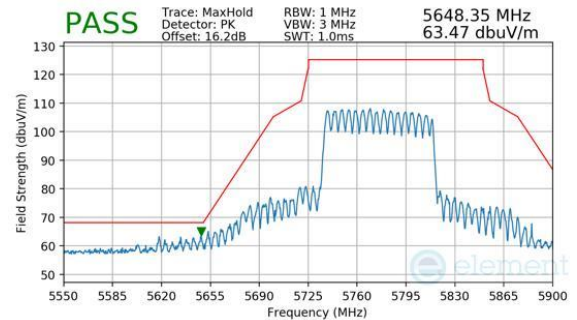

Plot 7-1111. CDD Diversity (Peak, RU996, Index 67, Ch.155, MCS11)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 340 of 375

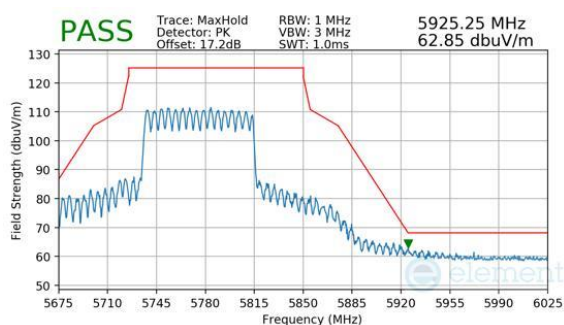


Plot 7-1112. CDD Diversity (Peak, RU996, Index 67, Ch.155, MCS11)


FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device		Page 341 of 375

7.6.22 CDD Diversity Radiated Band Edge Measurements (160MHz BW)


RU52

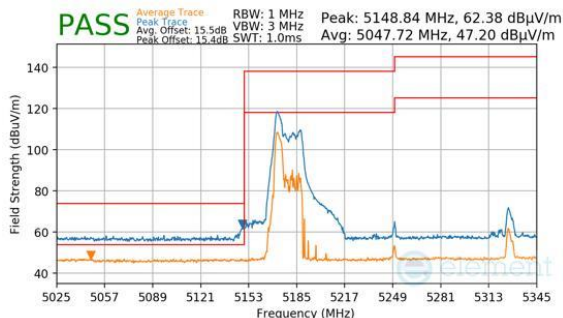


Plot 7-1113. CDD Diversity (Peak & Average, RU52, Index 37, Ch.50, MCS11)

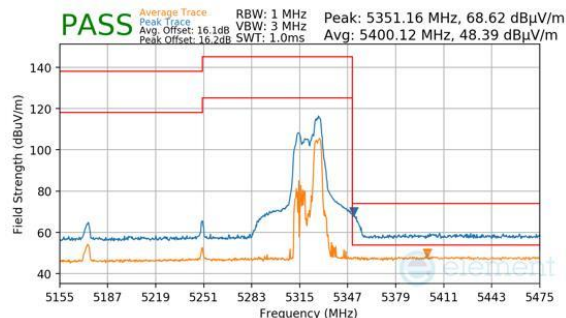


Plot 7-1116. CDD Diversity (Peak & Average, RU52, Index 52 (H), Ch.50, MCS11)

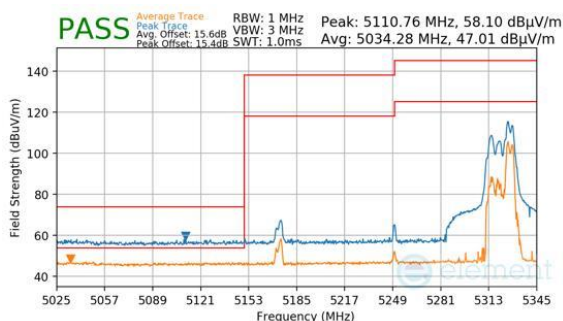


Plot 7-1114. CDD Diversity (Peak & Average, RU52, Index 52 (H), Ch.50, MCS11)

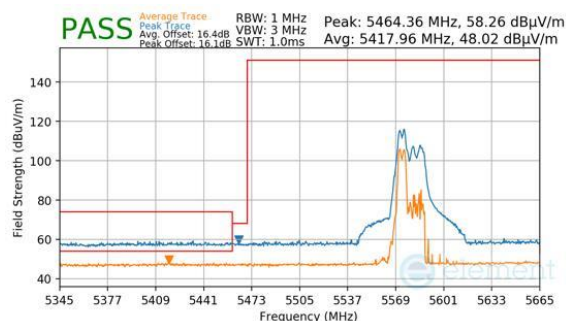

Plot 7-1117. (FCC Only) CDD Diversity (Peak & Average, RU52, Index 37, Ch.114, MCS11)

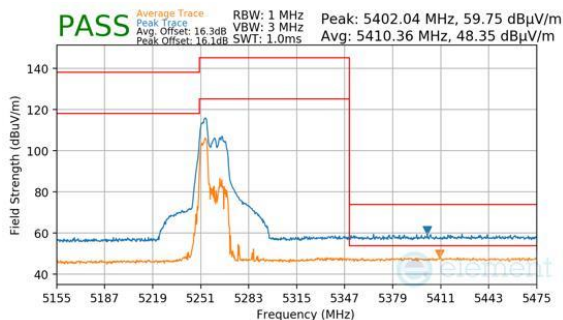


Plot 7-1115. CDD Diversity (Peak & Average, RU52, Index 37, Ch.50, MCS11)

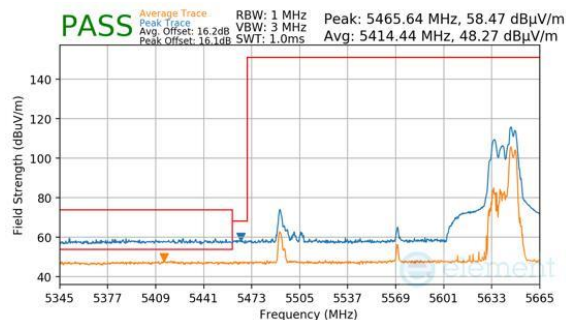


Plot 7-1118. (FCC Only) CDD Diversity (Peak & Average, RU52, Index 52 (H), Ch.114, MCS11)

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 342 of 375

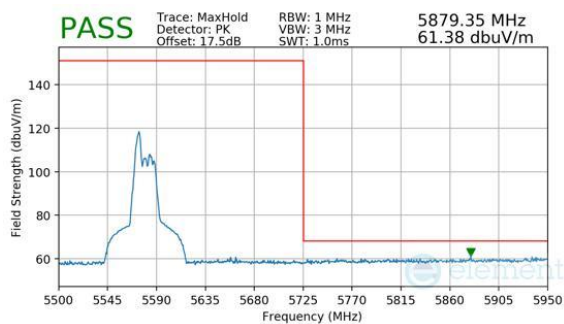

Plot 7-1119. (FCC Only) CDD Diversity (Peak, RU52, Index 37, Ch.114, MCS11)

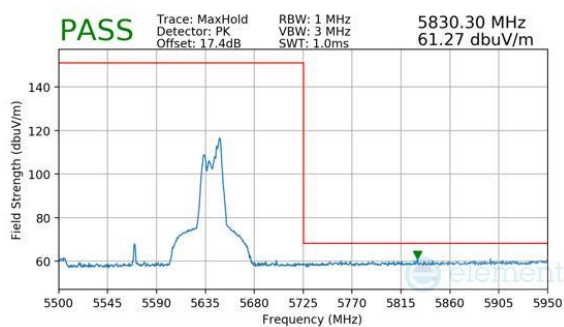


Plot 7-1120. (FCC Only) CDD Diversity (Peak, RU52, Index 52 (H), Ch.114, MCS11)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 343 of 375

V 10.6 10/27/2023


MRU

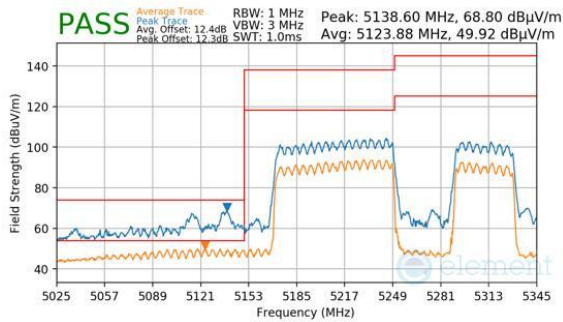


Plot 7-1121. CDD Diversity (Peak & Average, RU996+484, Index 94, Ch.50, MCS11)

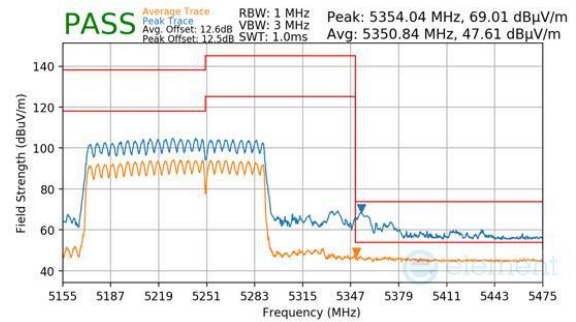


Plot 7-1124. CDD Diversity (Peak & Average, RU996+484, Index 95, Ch.50, MCS11)

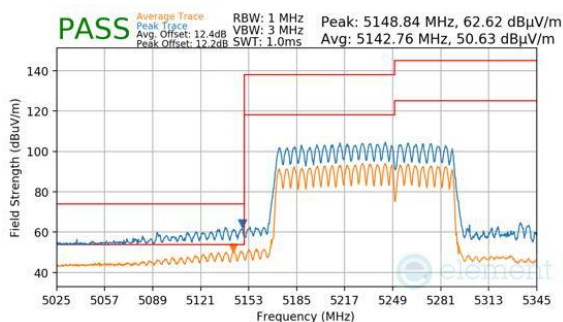


Plot 7-1122. CDD Diversity (Peak & Average, RU996+484, Index 95, Ch.50, MCS11)

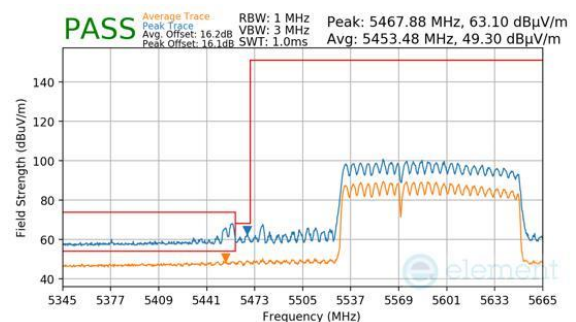

Plot 7-1125. (FCC Only) CDD Diversity (Peak & Average, RU996+484, Index 94 (L), Ch.114, MCS11)

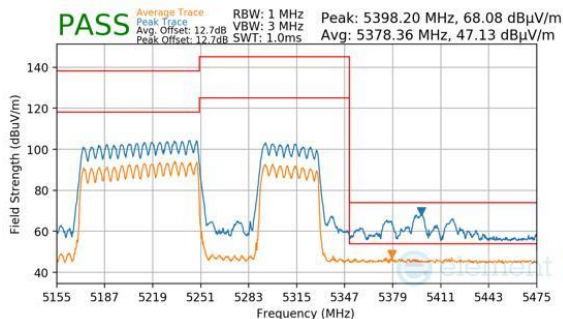


Plot 7-1123. CDD Diversity (Peak & Average, RU996+484, Index 94, Ch.50, MCS11)

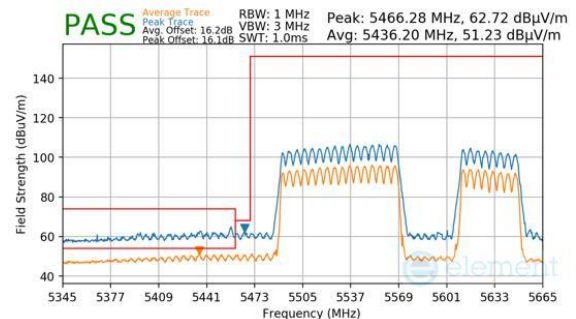


Plot 7-1126. (FCC Only) CDD Diversity (Peak & Average, RU996+484, Index 94 (H), Ch.114, MCS11)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 344 of 375

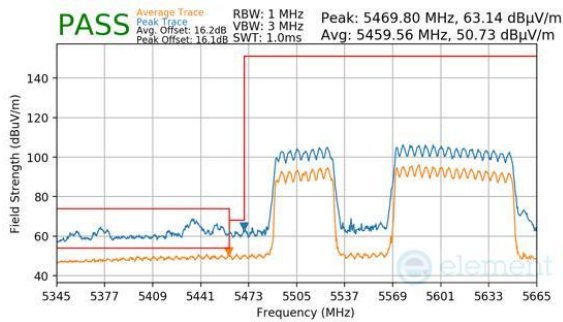


Plot 7-1127. (FCC Only) CDD Diversity (Peak & Average, RU996+484, Index 95 (L), Ch.114, MCS11)

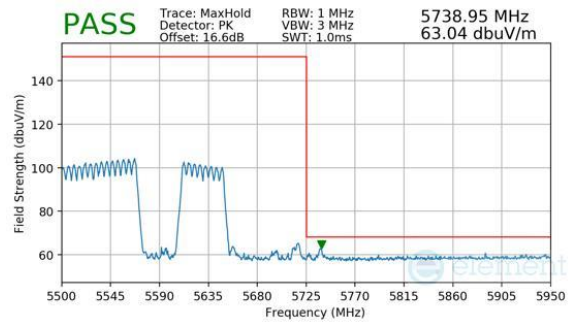


Plot 7-1130. (FCC Only) CDD Diversity (Peak, RU996+484, Index 94 (H), Ch.114, MCS11)

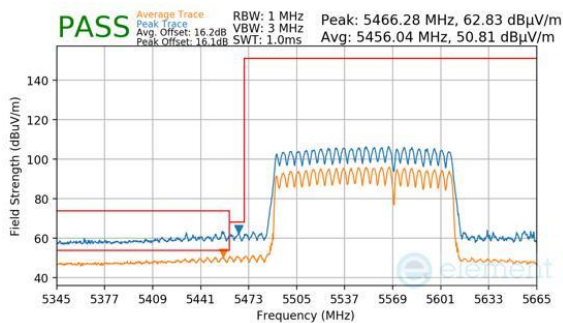


Plot 7-1128. (FCC Only) CDD Diversity (Peak & Average, RU996+484, Index 95 (H), Ch.114, MCS11)

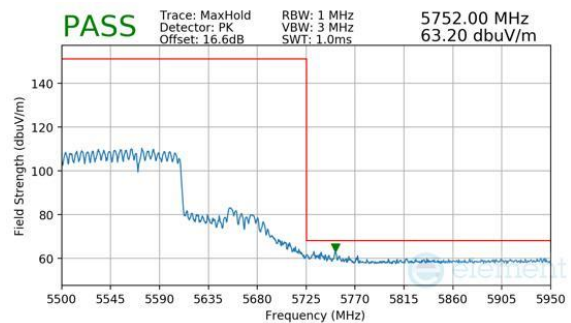

Plot 7-1131. (FCC Only) CDD Diversity (Peak, RU996+484, Index 95 (H), Ch.114, MCS11)

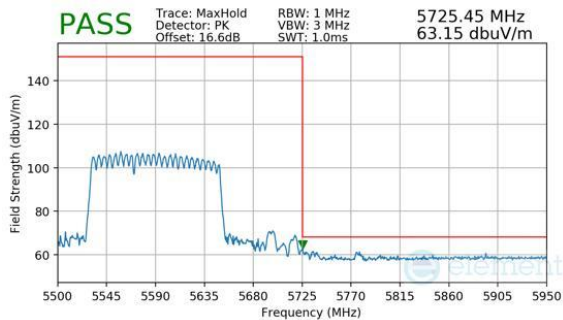


Plot 7-1129. (FCC Only) CDD Diversity (Peak, RU996+484, Index 94 (L), Ch.114, MCS11)

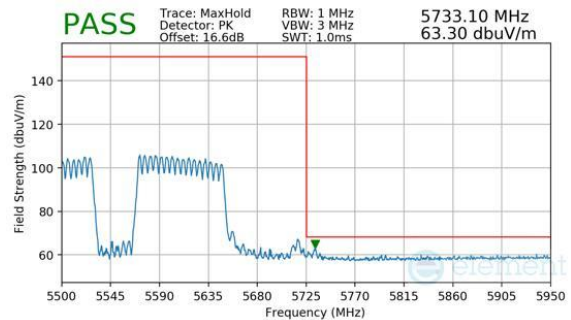


Plot 7-1132. (FCC Only) CDD Diversity (Peak, RU996+484, Index 95 (L), Ch.114, MCS11)


FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device		Page 345 of 375

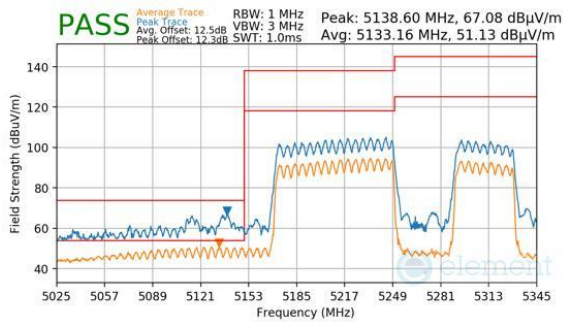


Plot 7-1133. CDD Diversity (Peak & Average, RU996+484+242, Index 94, Ch.50, MCS11)

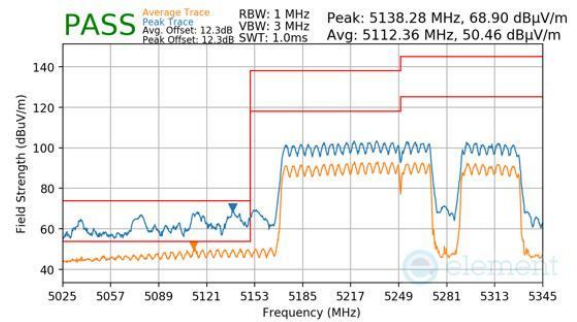


Plot 7-1136. CDD Diversity (Peak & Average, RU996+484+242, Index 97, Ch.50, MCS11)

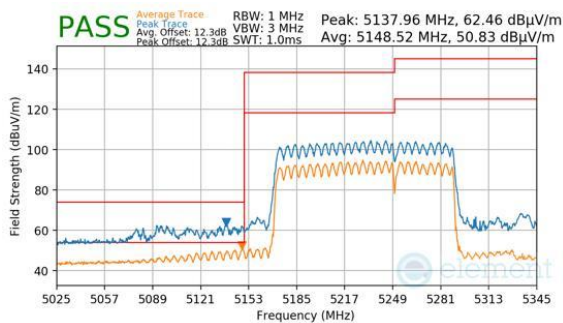


Plot 7-1134. CDD Diversity (Peak & Average, RU996+484+242, Index 95, Ch.50, MCS11)

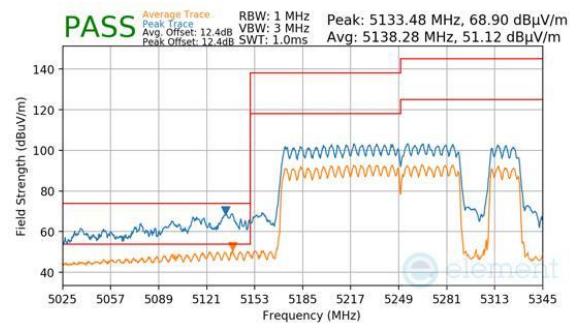

Plot 7-1137. CDD Diversity (Peak & Average, RU996+484+242, Index 98, Ch.50, MCS11)

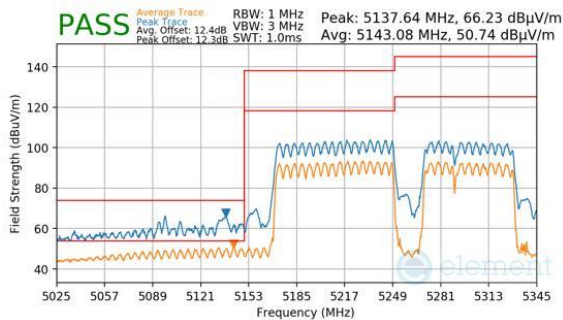


Plot 7-1135. CDD Diversity (Peak & Average, RU996+484+242, Index 96, Ch.50, MCS11)

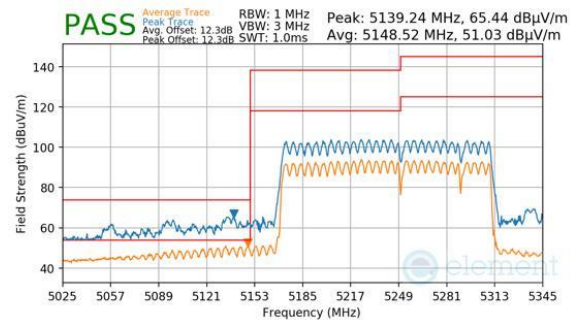


Plot 7-1138. CDD Diversity (Peak & Average, RU996+484+242, Index 99, Ch.50, MCS11)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 346 of 375

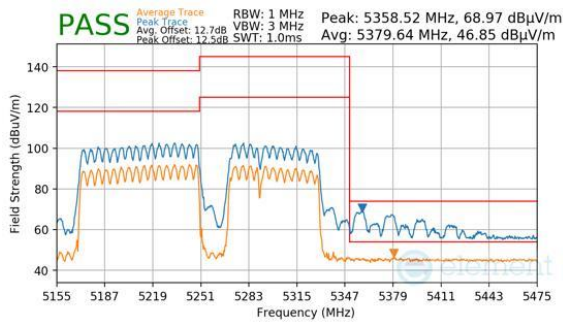


Plot 7-1139. CDD Diversity (Peak & Average, RU996+484+242, Index 96, Ch.50, MCS11)

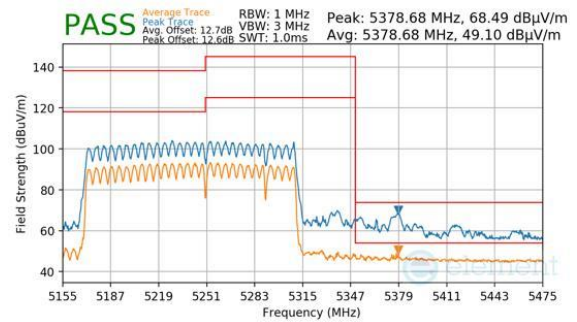


Plot 7-1142. CDD Diversity (Peak & Average, RU996+484+242, Index 99, Ch.50, MCS11)

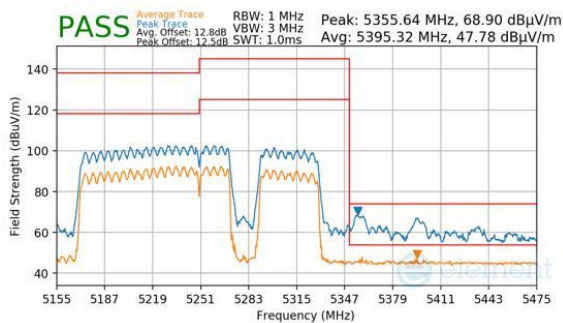


Plot 7-1140. CDD Diversity (Peak & Average, RU996+484+242, Index 97, Ch.50, MCS11)

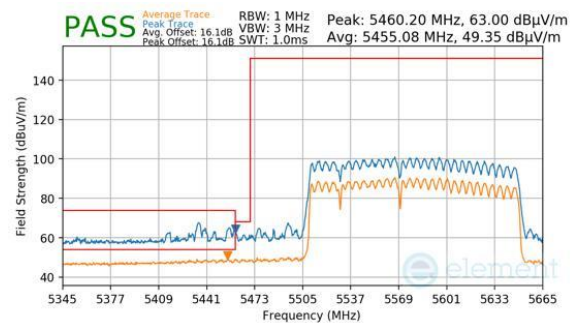

Plot 7-1143. (FCC Only) CDD Diversity (Peak & Average, RU996+484+242, Index 96 (L), Ch.114, MCS11)

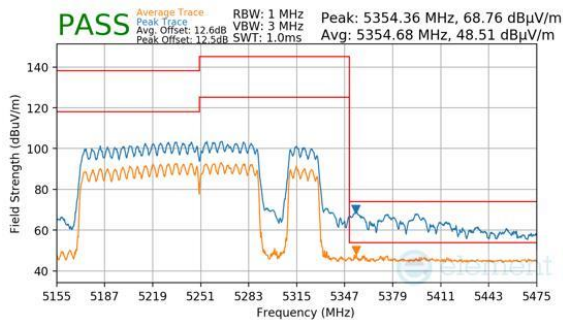


Plot 7-1141. CDD Diversity (Peak & Average, RU996+484+242, Index 98, Ch.50, MCS11)

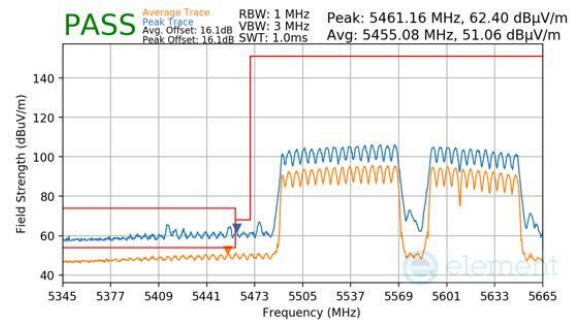


Plot 7-1144. (FCC Only) CDD Diversity (Peak & Average, RU996+484+242, Index 96 (H), Ch.114, MCS11)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 347 of 375

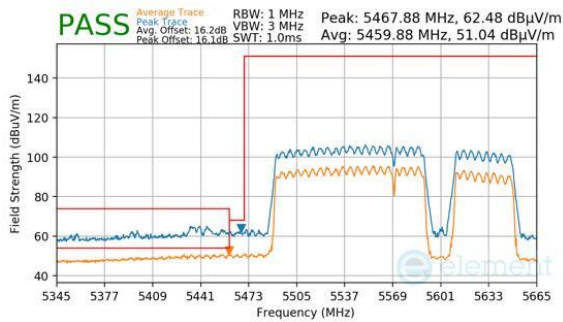


Plot 7-1145. (FCC Only) CDD Diversity (Peak & Average, RU996+484+242, Index 97 (H), Ch.114, MCS11)

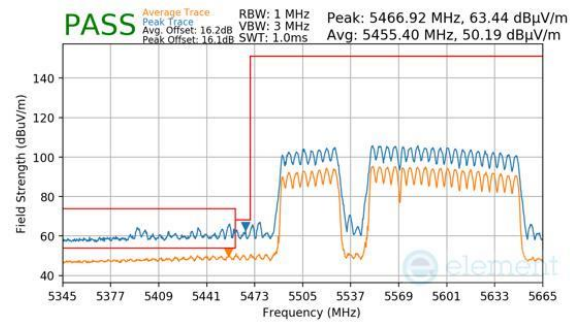


Plot 7-1148. (FCC Only) CDD Diversity (Peak & Average, RU996+484+242, Index 98 (L), Ch.114, MCS11)

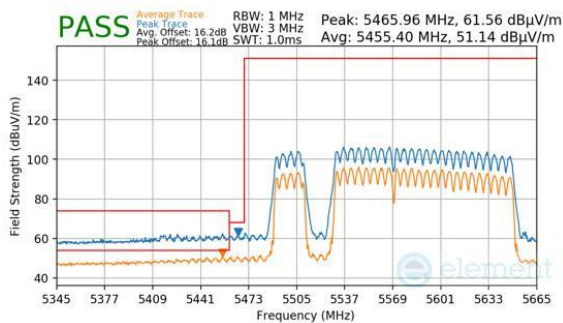


Plot 7-1146. (FCC Only) CDD Diversity (Peak & Average, RU996+484+242, Index 97 (L), Ch.114, MCS11)

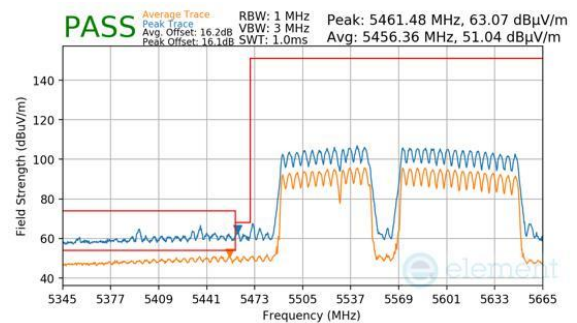

Plot 7-1149. (FCC Only) CDD Diversity (Peak & Average, RU996+484+242, Index 99 (L), Ch.114, MCS11)

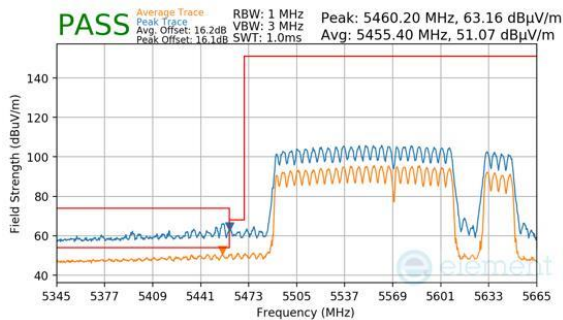


Plot 7-1147. (FCC Only) CDD Diversity (Peak & Average, RU996+484+242, Index 98 (H), Ch.114, MCS11)

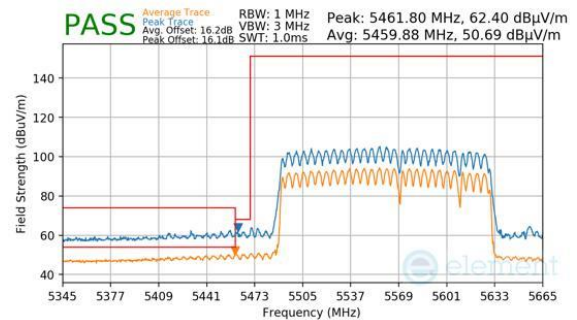


Plot 7-1150. (FCC Only) CDD Diversity (Peak & Average, RU996+484+242, Index 99 (H), Ch.114, MCS11)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 348 of 375

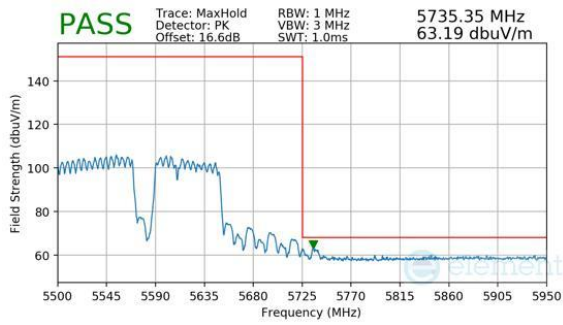


Plot 7-1151. (FCC Only) CDD Diversity (Peak, RU996+484+242, Index 96 (H), Ch.114, MCS11)

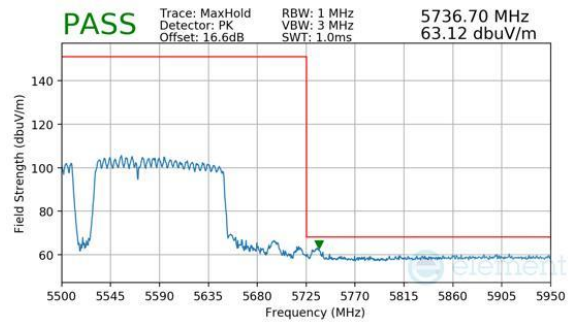


Plot 7-1154. (FCC Only) CDD Diversity (Peak, RU996+484+242, Index 97 (L), Ch.114, MCS11)

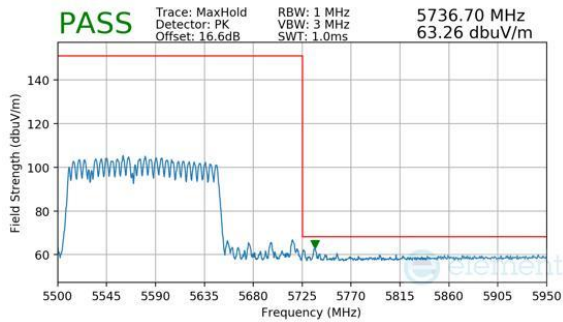


Plot 7-1152. (FCC Only) CDD Diversity (Peak, RU996+484+242, Index 96 (L), Ch.114, MCS11)

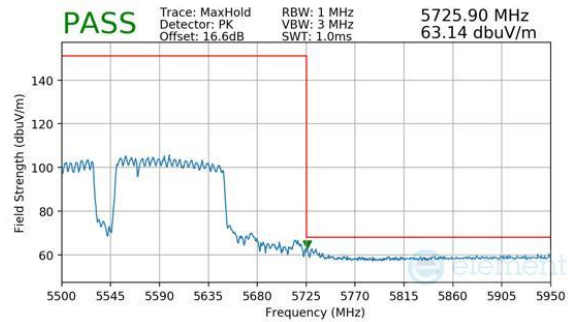

Plot 7-1155. (FCC Only) CDD Diversity (Peak, RU996+484+242, Index 98 (L), Ch.114, MCS11)

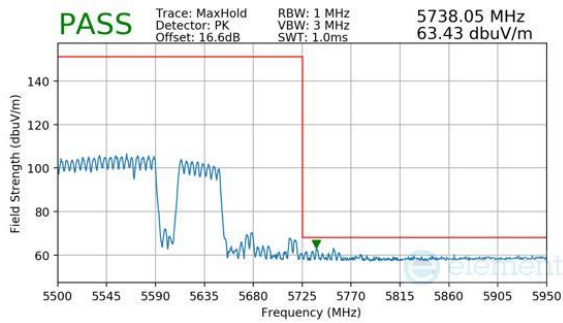


Plot 7-1153. (FCC Only) CDD Diversity (Peak, RU996+484+242, Index 97 (H), Ch.114, MCS11)

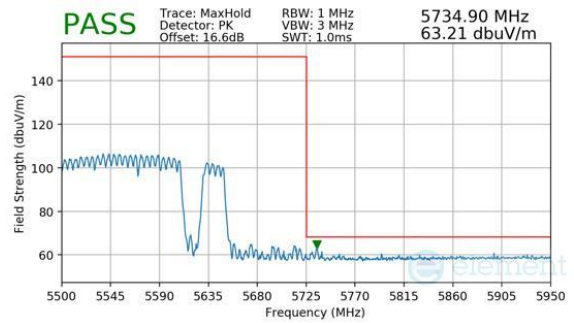


Plot 7-1156. (FCC Only) CDD Diversity (Peak, RU996+484+242, Index 98 (H), Ch.114, MCS11)

FCC ID: BCGA3357 IC: 579C-A3357			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device		Page 349 of 375

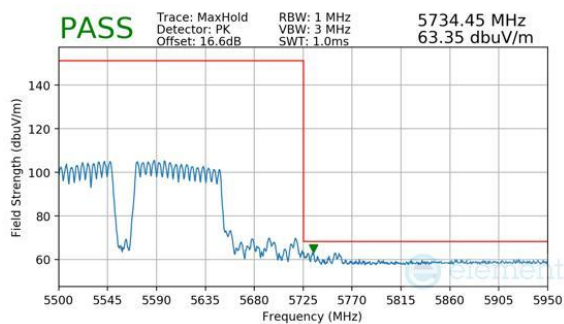

Plot 7-1157. (FCC Only) CDD Diversity (Peak, RU996+484+242, Index 99 (L), Ch.114, MCS11)

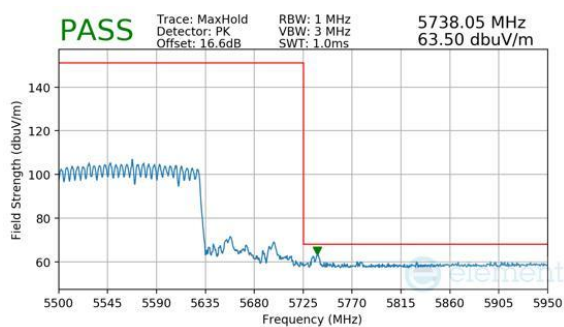


Plot 7-1158. (FCC Only) CDD Diversity (Peak, RU996+484+242, Index 99 (H), Ch.114, MCS11)


FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device		Page 350 of 375

V 10.6 10/27/2023


RU996X2

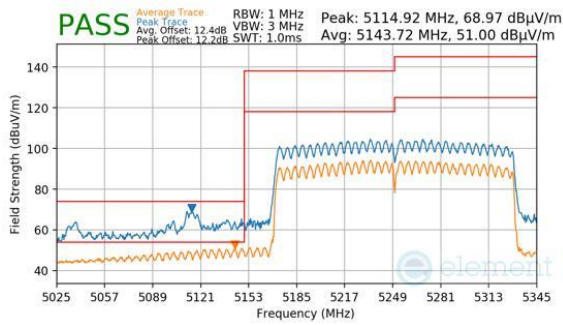


Plot 7-1159. CDD Diversity (Peak & Average, RU996X2, Index 68, Ch.50, MCS11)

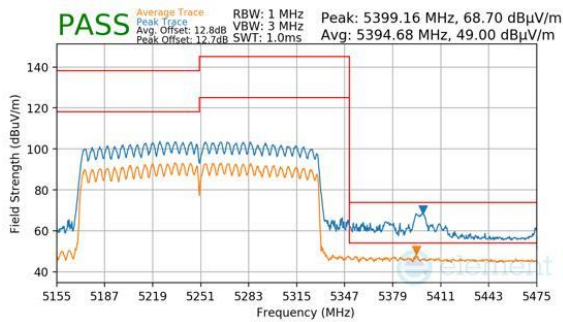

Plot 7-1160. CDD Diversity (Peak & Average, RU996X2, Index 68, Ch.50, MCS11)

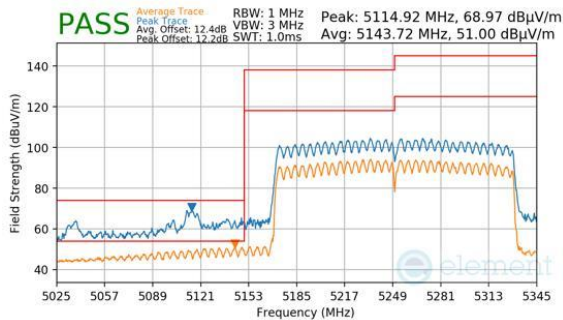

Plot 7-1161. CDD Diversity (Peak & Average, RU996X2, Index 68, Ch.114, MCS11)

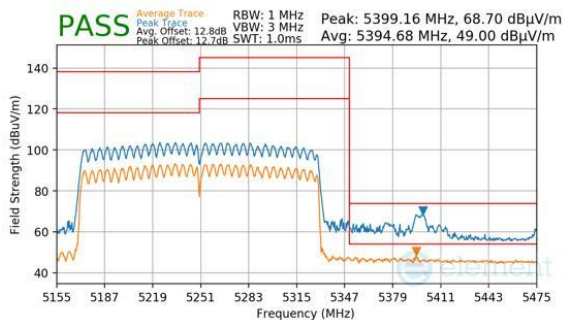

Plot 7-1162. CDD Diversity (Peak & Average, RU996X2, Index 68, Ch.114, MCS11)

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 351 of 375

7.7 Radiated Spurious Emissions – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-234 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-234. Radiated Limits

Test Procedures Used

ANSI C63.10-2020

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 352 of 375

V 10.6 10/27/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

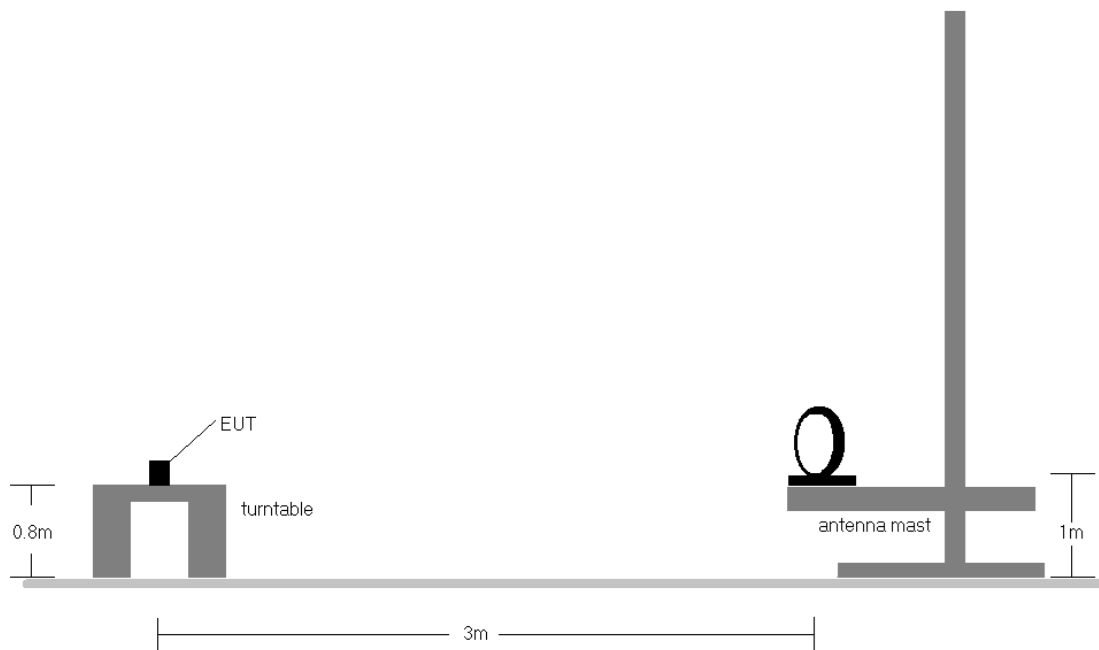


Figure 7-6. Radiated Test Setup < 30MHz

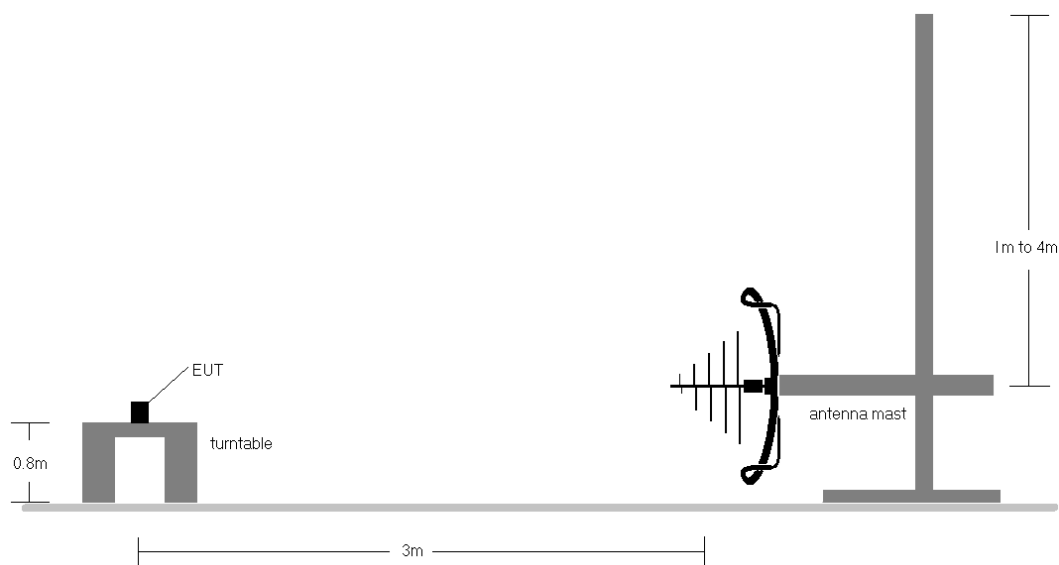


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 353 of 375

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-234.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. All antenna configurations and data rates were investigated and only the worst case are reported.
10. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger


Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]} - \text{Preamplifier Gain}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 354 of 375

7.7.1 CDD Primary Radiated Spurious Emissions (Below 1GHz)

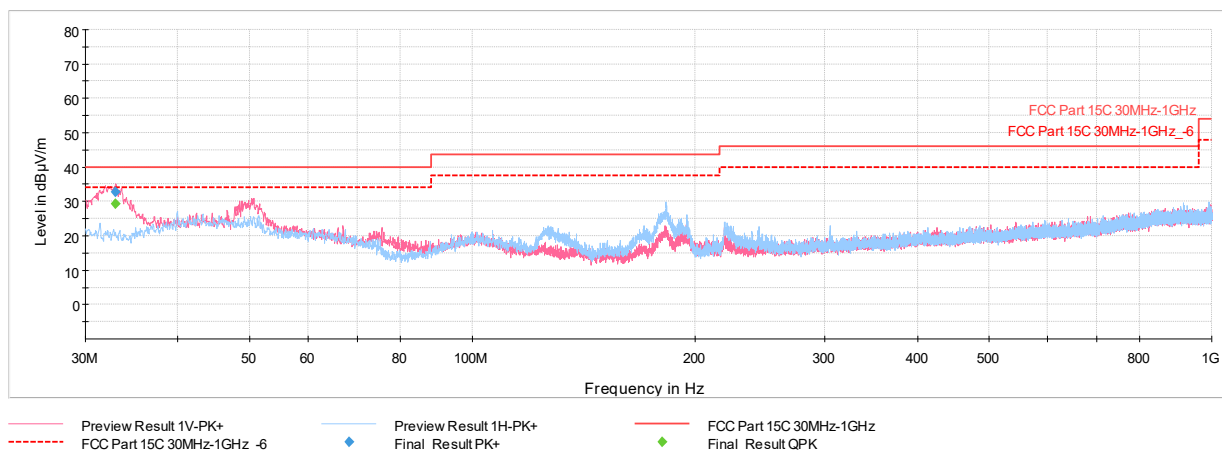


Plot 7-1163. RSE below 1GHz CDD Primary (RU26 – Ch.40), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
32.91	QuasiPeak	V	100	230	-59.28	-18.45	29.27	40.00	-10.73
50.66	Max Peak	V	100	2	-61.80	-14.22	30.98	40.00	-9.02
75.49	Max Peak	V	100	200	-63.68	-21.03	22.29	40.00	-17.71
126.56	Max Peak	H	200	165	-64.81	-19.33	22.86	43.52	-20.66
182.97	Max Peak	H	100	234	-59.57	-17.62	29.81	43.52	-13.71
219.59	Max Peak	H	100	81	-67.15	-15.78	24.07	46.02	-21.95

Table 7-235. RSE below 1GHz CDD Primary (RU26 – Ch.40), with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 355 of 375

V 10.6 10/27/2023

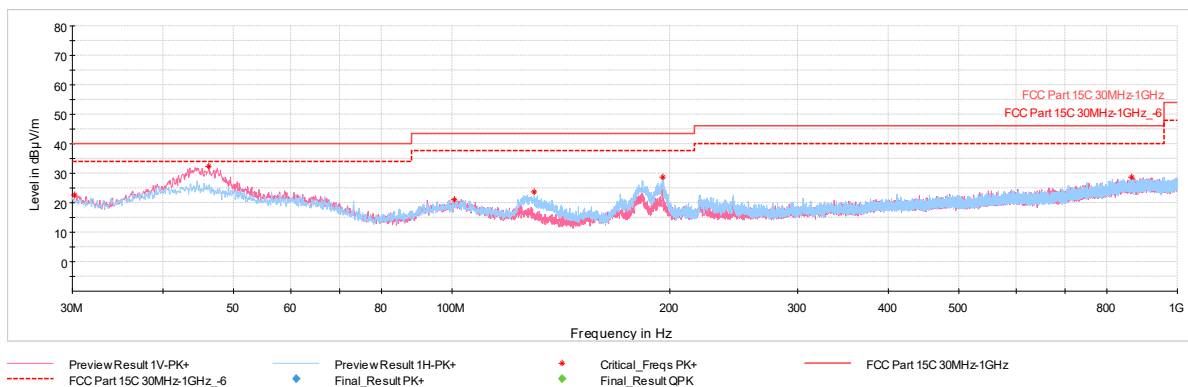


Plot 7-1164. RSE below 1GHz CDD Primary (RU78 – Ch.40), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
30.19	Max Peak	V	200	329	-66.05	-18.35	22.60	40.00	-17.40
46.30	Max Peak	V	100	9	-60.11	-14.44	32.45	40.00	-7.55
100.81	Max Peak	V	300	174	-69.45	-16.51	21.04	43.52	-22.48
129.96	Max Peak	H	200	180	-63.68	-19.58	23.74	43.52	-19.78
195.24	Max Peak	H	100	254	-62.56	-15.81	28.63	43.52	-14.89
865.90	Max Peak	H	100	220	-76.17	-2.04	28.79	46.02	-17.23

Table 7-236. RSE below 1GHz CDD Primary (RU78 – Ch.40), with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 356 of 375

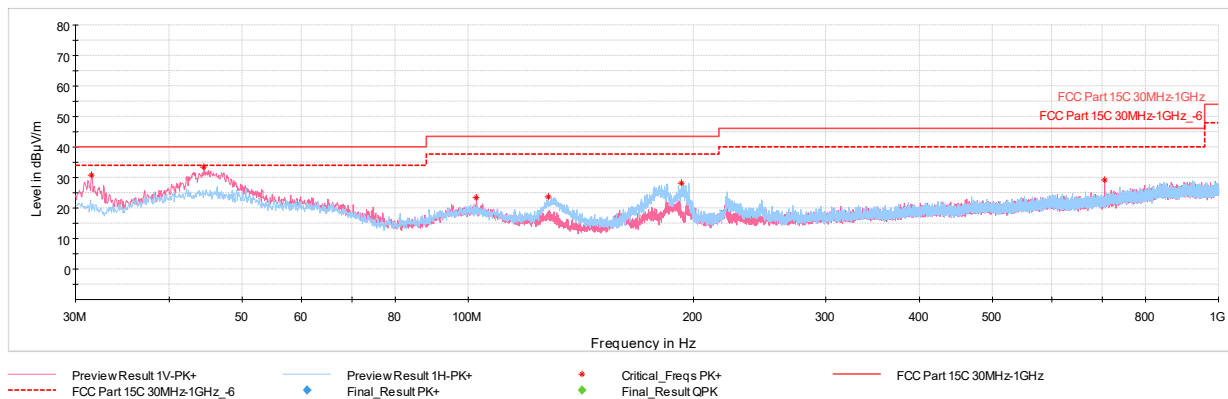


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
31.50	Max Peak	V	300	237	-57.53	-18.60	30.87	40.00	-9.13
44.50	Max Peak	V	100	336	-59.09	-14.60	33.31	40.00	-6.69
102.65	Max Peak	V	100	311	-67.31	-16.40	23.29	43.52	-20.23
127.97	Max Peak	H	300	350	-63.97	-19.40	23.63	43.52	-19.89
192.48	Max Peak	H	100	251	-62.64	-16.20	28.16	43.52	-15.36
705.75	Max Peak	V	200	15	-72.68	-5.00	29.32	46.02	-16.70

Table 7-237. RSE below 1GHz CDD Primary (RU242– Ch.40), with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 357 of 375

7.7.2 CDD Diversity Radiated Spurious Emissions (Below 1GHz)

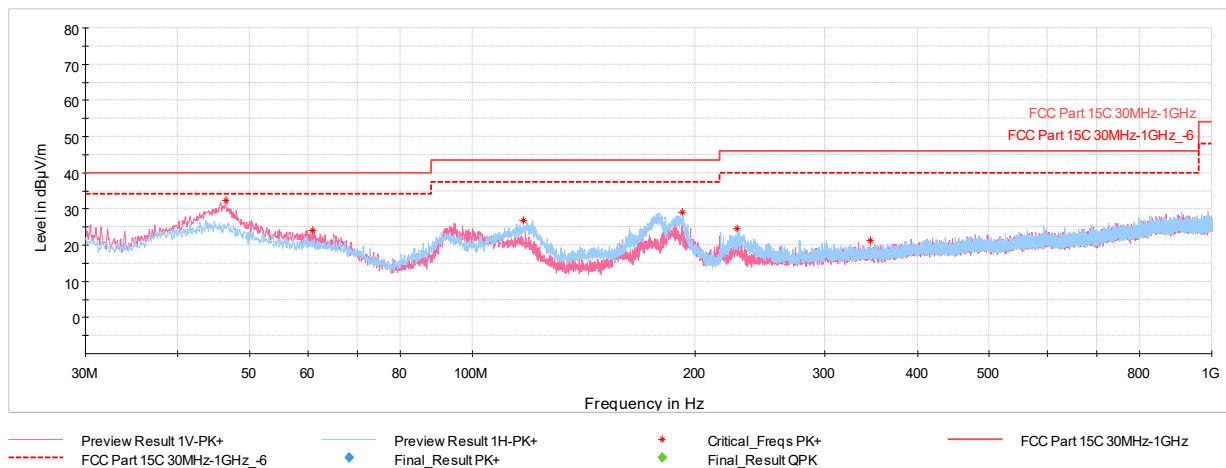


Plot 7-1166. RSE below 1GHz CDD Diversity (RU26 – Ch.40), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
46.49	Max Peak	V	100	327	-60.13	-14.42	32.45	40.00	-7.55
60.85	Max Peak	V	100	34	-66.86	-16.03	24.11	40.00	-15.89
117.30	Max Peak	H	200	168	-62.23	-17.96	26.81	43.52	-16.71
192.43	Max Peak	H	100	82	-61.61	-16.23	29.16	43.52	-14.36
228.41	Max Peak	H	100	82	-67.33	-15.21	24.46	46.02	-21.56
345.69	Max Peak	V	300	195	-74.04	-11.61	21.35	46.02	-24.67

Table 7-238. RSE below 1GHz CDD Diversity (RU26 – Ch.40), with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 358 of 375

V 10.6 10/27/2023

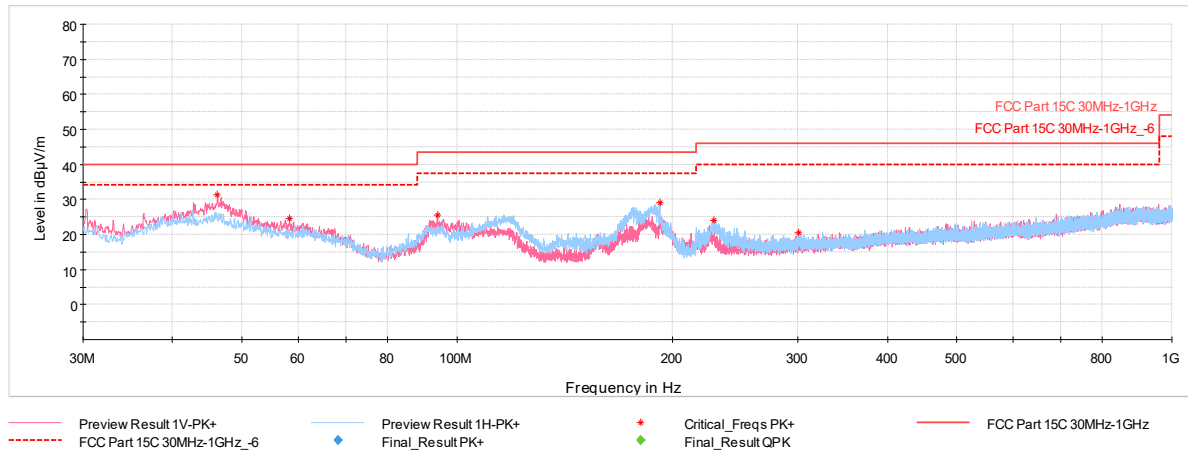


Plot 7-1167. RSE below 1GHz CDD Diversity (RU78 – Ch.40), with AC/DC Adapter

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
46.25	Max Peak	V	100	62	-61.21	-14.44	31.35	40.00	-8.65
58.32	Max Peak	V	100	114	-67.24	-15.32	24.44	40.00	-15.56
93.92	Max Peak	V	100	102	-63.96	-17.59	25.45	43.52	-18.07
192.23	Max Peak	H	200	248	-61.80	-16.25	28.95	43.52	-14.57
228.61	Max Peak	H	100	85	-67.74	-15.21	24.05	46.02	-21.97
300.63	Max Peak	H	100	122	-73.05	-13.34	20.61	46.02	-25.41

Table 7-239. RSE below 1GHz CDD Diversity (RU78– Ch.40), with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 359 of 375

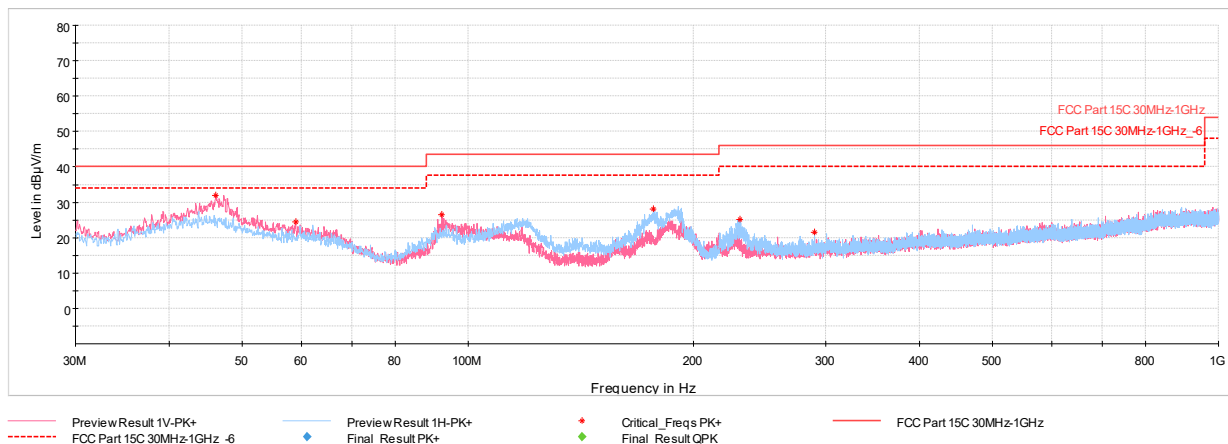

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
46.15	Max Peak	V	100	5	-60.58	-14.45	31.97	40.00	-8.03
58.96	Max Peak	V	100	20	-67.07	-15.45	24.48	40.00	-15.52
92.27	Max Peak	V	100	91	-62.67	-17.77	26.56	43.52	-16.96
176.81	Max Peak	H	100	107	-60.68	-18.16	28.16	43.52	-15.36
230.31	Max Peak	H	100	96	-66.81	-15.11	25.08	46.02	-20.94
289.48	Max Peak	H	100	119	-71.93	-13.56	21.51	46.02	-24.51

Table 7-240. RSE below 1GHz CDD Diversity (RU242– Ch.40), with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 360 of 375

7.8 AC Line Conducted Emissions Measurement

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. All data rates and modes were investigated for AC Line conducted spurious emissions.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-241. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2020, Subclause 6.2

Test Settings

Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 361 of 375

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

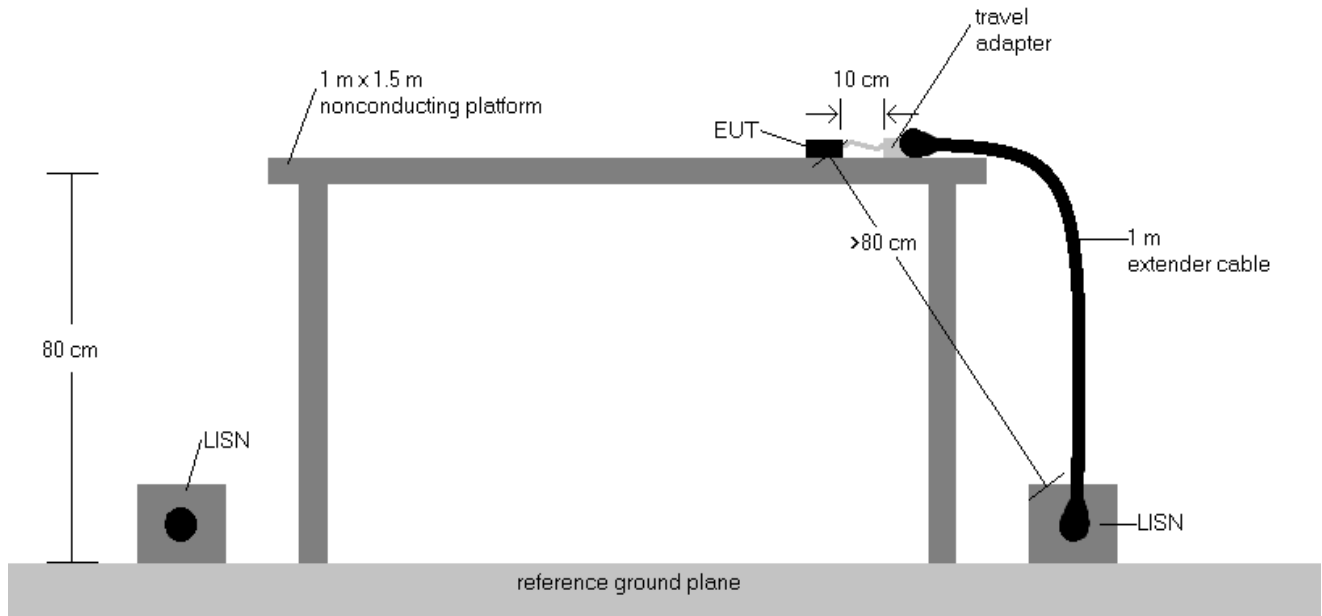



Figure 7-8. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. Both configurations below were investigated, and the worst case has been reported.
 - a. EUT powered by AC/DC adaptor via USB-C cable with wire charger
 - b. EUT powered by host PC via USB-C cable with wire charger
3. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
4. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
5. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Correction Factor (dB)}$
6. $\text{Margin (dB)} = \text{QP/AV Level (dB}\mu\text{V)} - \text{QP/AV Limit (dB}\mu\text{V)}$
7. Traces shown in plots are made using quasi-peak and average detectors.
8. Deviations to the Specifications: None.

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 362 of 375

7.8.1 CDD Primary AC Line Conducted Emissions Measurement

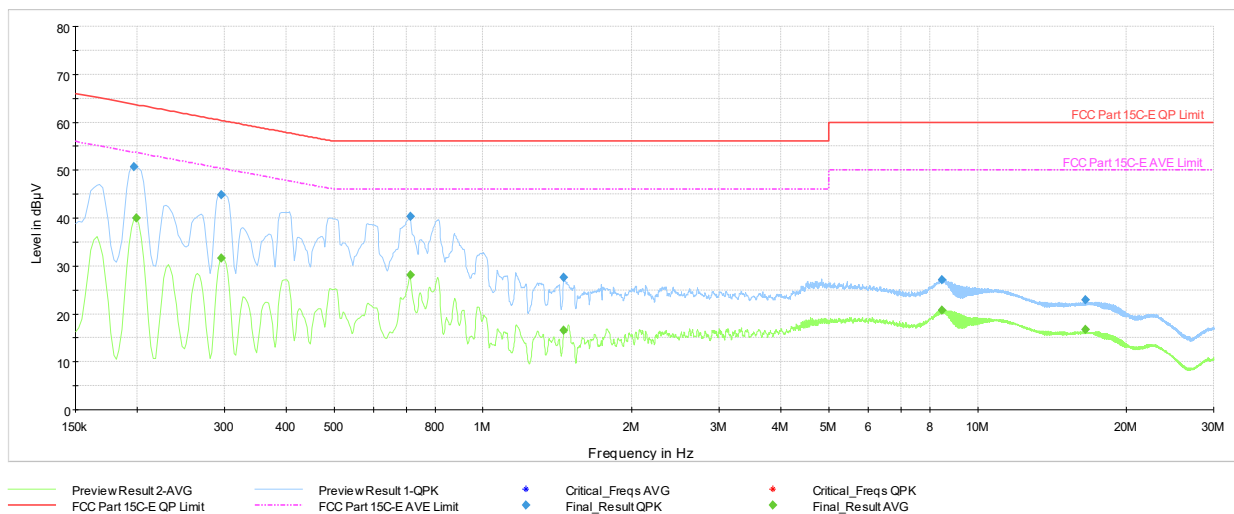


Plot 7-1169. AC Line Conducted Plot with 11be CDD Primary – RU26 – Ch.40 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.20	FINAL	50.72	---	63.73	-13.01	L1	GND
0.20	FINAL	---	40.00	53.63	-13.63	L1	GND
0.30	FINAL	---	31.65	50.35	-18.70	L1	GND
0.30	FINAL	44.92	---	60.35	-15.43	L1	GND
0.71	FINAL	---	28.10	46.00	-17.90	L1	GND
0.71	FINAL	40.37	---	56.00	-15.63	L1	GND
1.46	FINAL	27.54	---	56.00	-28.46	L1	GND
1.46	FINAL	---	16.56	46.00	-29.44	L1	GND
8.48	FINAL	27.20	---	60.00	-32.80	L1	GND
8.48	FINAL	---	20.81	50.00	-29.19	L1	GND
16.53	FINAL	---	16.77	50.00	-33.23	L1	GND
16.54	FINAL	22.91	---	60.00	-37.09	L1	GND

Table 7-242. AC Line Conducted with 11be CDD Primary – RU26 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 363 of 375

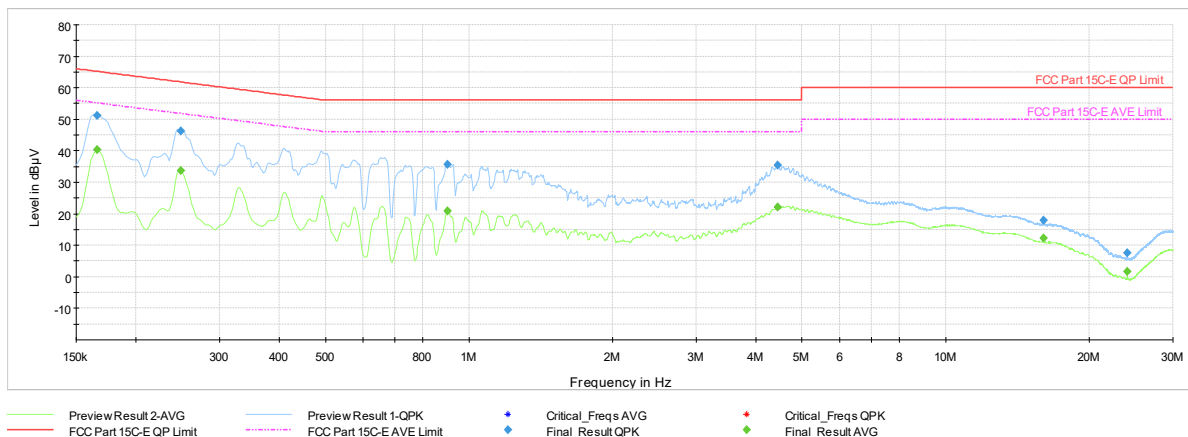


Plot 7-1170. AC Line Conducted Plot with 11be CDD Primary – RU26 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	40.26	55.17	-14.91	N	GND
0.17	FINAL	51.23	---	65.17	-13.94	N	GND
0.25	FINAL	---	33.62	51.79	-18.17	N	GND
0.25	FINAL	46.24	---	61.79	-15.55	N	GND
0.90	FINAL	---	20.88	46.00	-25.12	N	GND
0.90	FINAL	35.67	---	56.00	-20.33	N	GND
4.45	FINAL	35.39	---	56.00	-20.61	N	GND
4.45	FINAL	---	22.12	46.00	-23.88	N	GND
16.03	FINAL	17.94	---	60.00	-42.06	N	GND
16.03	FINAL	---	12.20	50.00	-37.80	N	GND
24.04	FINAL	---	1.56	50.00	-48.44	N	GND
24.04	FINAL	7.53	---	60.00	-52.47	N	GND

Table 7-243. AC Line Conducted with 11be CDD Primary – RU26 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 364 of 375

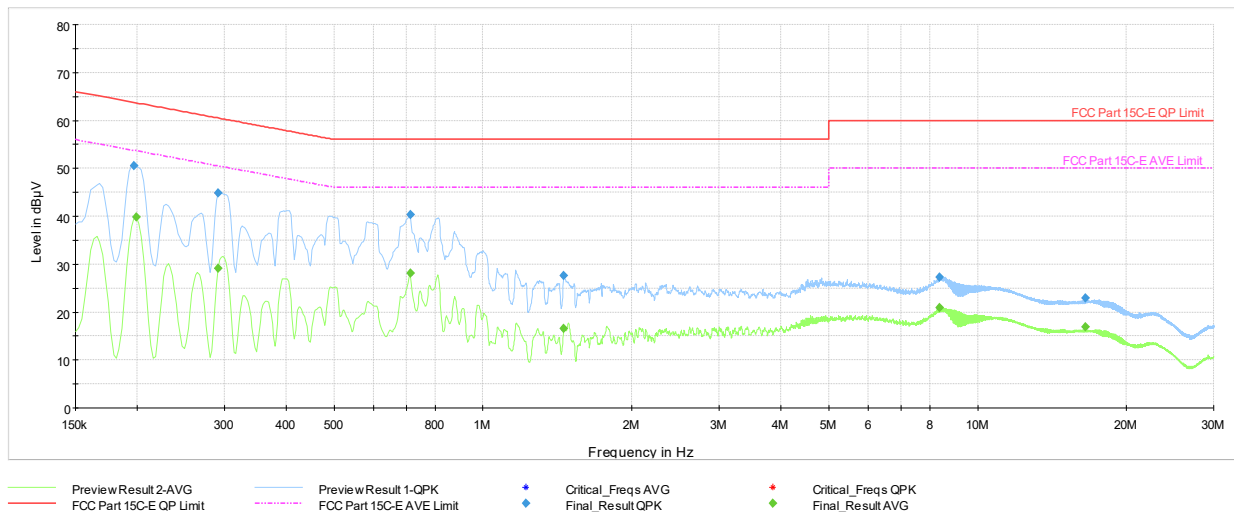


Plot 7-1171. AC Line Conducted Plot with 11be CDD Primary – RU78 – Ch.40 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.20	FINAL	50.48	---	63.73	-13.25	L1	GND
0.20	FINAL	---	39.78	53.63	-13.85	L1	GND
0.29	FINAL	---	29.12	50.47	-21.35	L1	GND
0.29	FINAL	44.80	---	60.47	-15.67	L1	GND
0.71	FINAL	---	28.12	46.00	-17.88	L1	GND
0.71	FINAL	40.41	---	56.00	-15.59	L1	GND
1.46	FINAL	27.60	---	56.00	-28.40	L1	GND
1.46	FINAL	---	16.54	46.00	-29.46	L1	GND
8.38	FINAL	---	21.00	50.00	-29.00	L1	GND
8.38	FINAL	27.35	---	60.00	-32.65	L1	GND
16.53	FINAL	22.95	---	60.00	-37.05	L1	GND
16.53	FINAL	---	16.85	50.00	-33.15	L1	GND

Table 7-244. AC Line Conducted with 11be CDD Primary – RU78 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 365 of 375

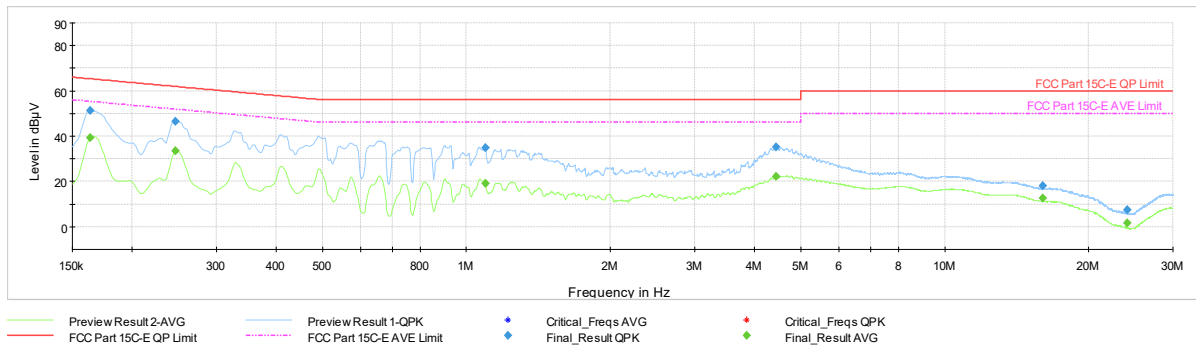


Plot 7-1172. AC Line Conducted Plot with 11be CDD Primary – RU78 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.16	FINAL	---	39.22	55.28	-16.06	N	GND
0.16	FINAL	51.37	---	65.28	-13.91	N	GND
0.25	FINAL	---	33.65	51.87	-18.22	N	GND
0.25	FINAL	46.63	---	61.87	-15.24	N	GND
1.10	FINAL	---	19.23	46.00	-26.77	N	GND
1.10	FINAL	34.87	---	56.00	-21.13	N	GND
4.45	FINAL	35.24	---	56.00	-20.76	N	GND
4.45	FINAL	---	22.15	46.00	-23.85	N	GND
16.02	FINAL	18.11	---	60.00	-41.89	N	GND
16.02	FINAL	---	12.48	50.00	-37.52	N	GND
24.03	FINAL	---	1.67	50.00	-48.33	N	GND
24.03	FINAL	7.52	---	60.00	-52.48	N	GND

Table 7-245. AC Line Conducted with 11be CDD Primary – RU78 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 366 of 375

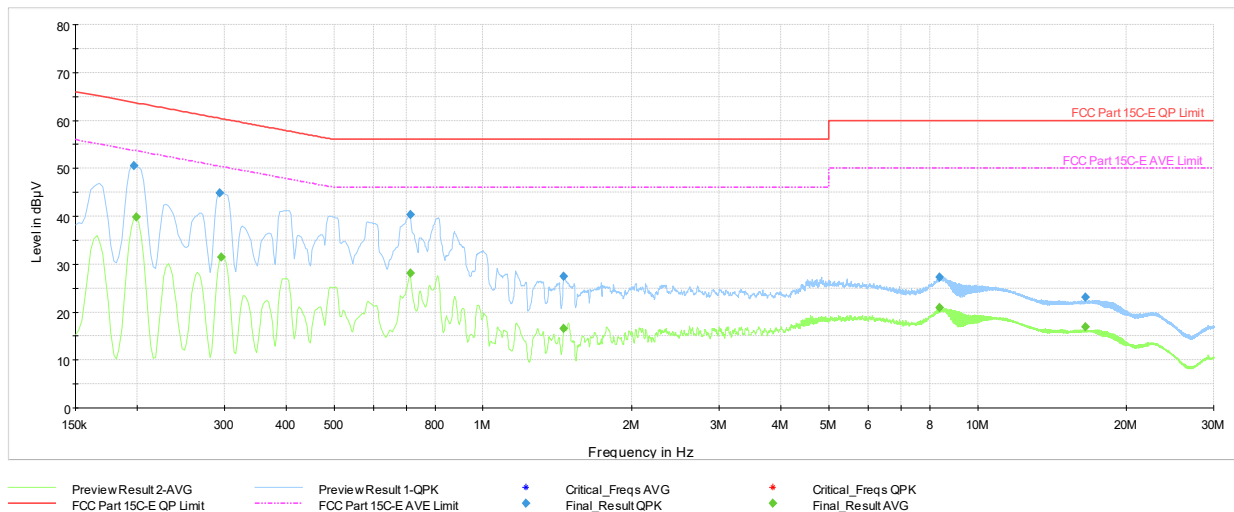


Plot 7-1173. AC Line Conducted Plot with 11be CDD Primary – RU242 – Ch.40 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.20	FINAL	50.53	---	63.73	-13.20	L1	GND
0.20	FINAL	---	39.83	53.63	-13.80	L1	GND
0.29	FINAL	44.84	---	60.41	-15.57	L1	GND
0.30	FINAL	---	31.55	50.35	-18.80	L1	GND
0.71	FINAL	---	28.11	46.00	-17.89	L1	GND
0.71	FINAL	40.41	---	56.00	-15.59	L1	GND
1.46	FINAL	27.52	---	56.00	-28.48	L1	GND
1.46	FINAL	---	16.54	46.00	-29.46	L1	GND
8.38	FINAL	27.22	---	60.00	-32.78	L1	GND
8.38	FINAL	---	20.91	50.00	-29.09	L1	GND
16.53	FINAL	---	16.82	50.00	-33.18	L1	GND
16.53	FINAL	23.03	---	60.00	-36.97	L1	GND

Table 7-246. AC Line Conducted with 11be CDD Primary – RU242 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 367 of 375

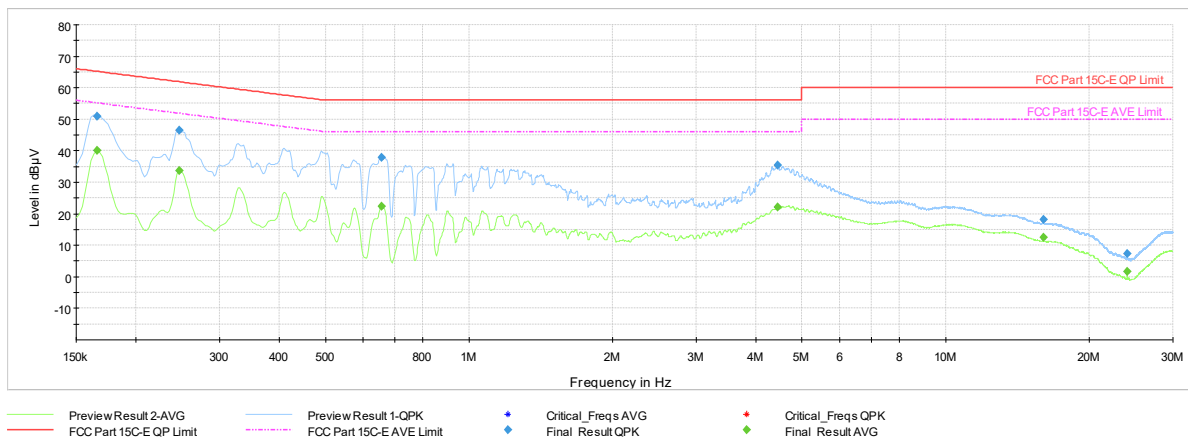


Plot 7-1174. AC Line Conducted Plot with 11be CDD Primary – RU242 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.17	FINAL	---	40.17	55.17	-15.00	N	GND
0.17	FINAL	51.02	---	65.17	-14.15	N	GND
0.25	FINAL	---	33.66	51.87	-18.21	N	GND
0.25	FINAL	46.62	---	61.87	-15.25	N	GND
0.66	FINAL	---	22.30	46.00	-23.70	N	GND
0.66	FINAL	37.80	---	56.00	-18.20	N	GND
4.44	FINAL	35.40	---	56.00	-20.60	N	GND
4.44	FINAL	---	22.16	46.00	-23.84	N	GND
16.02	FINAL	18.18	---	60.00	-41.82	N	GND
16.02	FINAL	---	12.48	50.00	-37.52	N	GND
24.03	FINAL	---	1.55	50.00	-48.45	N	GND
24.03	FINAL	7.38	---	60.00	-52.62	N	GND

Table 7-247. AC Line Conducted with 11be CDD Primary – RU242 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 368 of 375

7.8.2 CDD Diversity AC Line Conducted Emissions Measurement

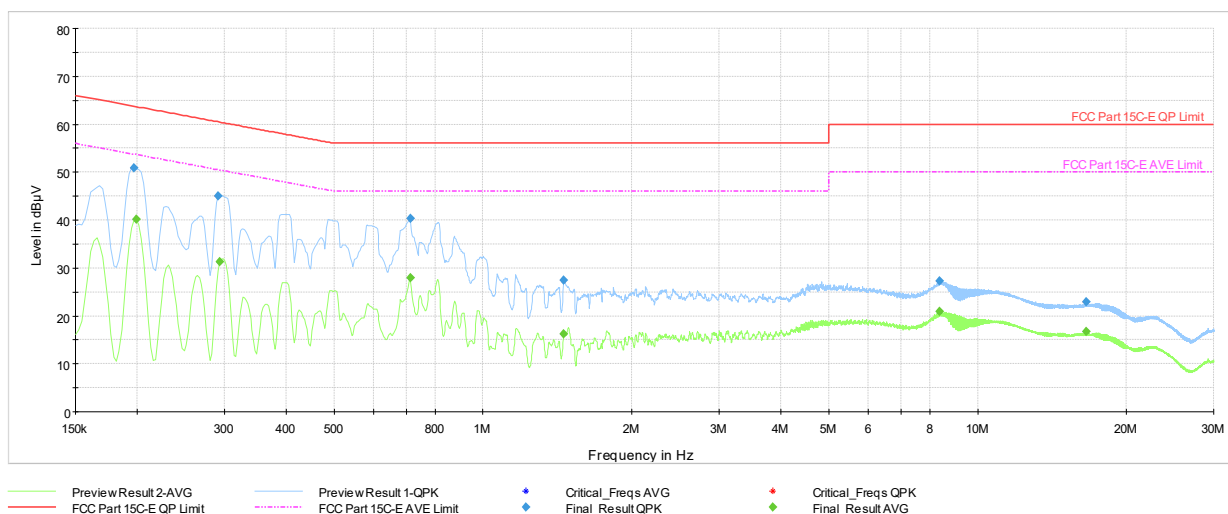

Plot 7-1175. AC Line Conducted Plot with 11be CDD Diversity – RU26 – Ch.40 (L1) with AC/DC Adapter


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.20	FINAL	50.91	---	63.73	-12.82	L1	GND
0.20	FINAL	---	40.21	53.63	-13.42	L1	GND
0.29	FINAL	45.06	---	60.47	-15.41	L1	GND
0.29	FINAL	---	31.23	50.41	-19.18	L1	GND
0.71	FINAL	---	27.97	46.00	-18.03	L1	GND
0.71	FINAL	40.32	---	56.00	-15.68	L1	GND
1.46	FINAL	27.39	---	56.00	-28.61	L1	GND
1.46	FINAL	---	16.31	46.00	-29.69	L1	GND
8.38	FINAL	---	20.95	50.00	-29.05	L1	GND
8.38	FINAL	27.23	---	60.00	-32.77	L1	GND
16.56	FINAL	---	16.77	50.00	-33.23	L1	GND
16.56	FINAL	22.87	---	60.00	-37.13	L1	GND

Table 7-248. AC Line Conducted with 11be CDD Diversity – RU26 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 369 of 375

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

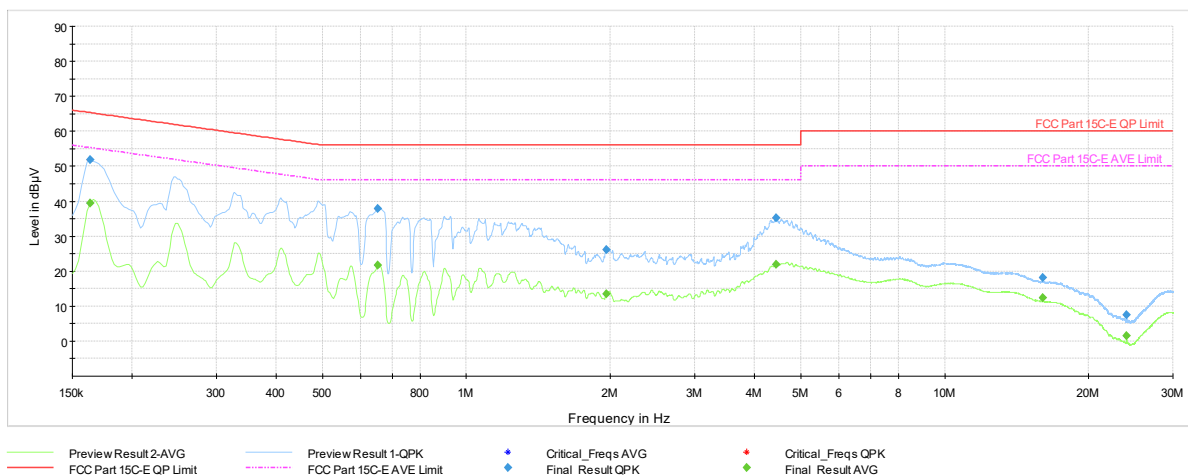


Plot 7-1176. AC Line Conducted Plot with 11be CDD Diversity – RU26 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.16	FINAL	---	39.48	55.28	-15.80	N	GND
0.16	FINAL	51.79	---	65.28	-13.49	N	GND
0.65	FINAL	---	21.69	46.00	-24.31	N	GND
0.65	FINAL	37.87	---	56.00	-18.13	N	GND
1.96	FINAL	---	13.46	46.00	-32.54	N	GND
1.96	FINAL	26.15	---	56.00	-29.85	N	GND
4.43	FINAL	35.20	---	56.00	-20.80	N	GND
4.43	FINAL	---	21.84	46.00	-24.16	N	GND
16.02	FINAL	18.06	---	60.00	-41.94	N	GND
16.02	FINAL	---	12.47	50.00	-37.53	N	GND
24.02	FINAL	---	1.59	50.00	-48.41	N	GND
24.02	FINAL	7.49	---	60.00	-52.51	N	GND

Table 7-249. AC Line Conducted with 11be CDD Diversity – RU26 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 370 of 375

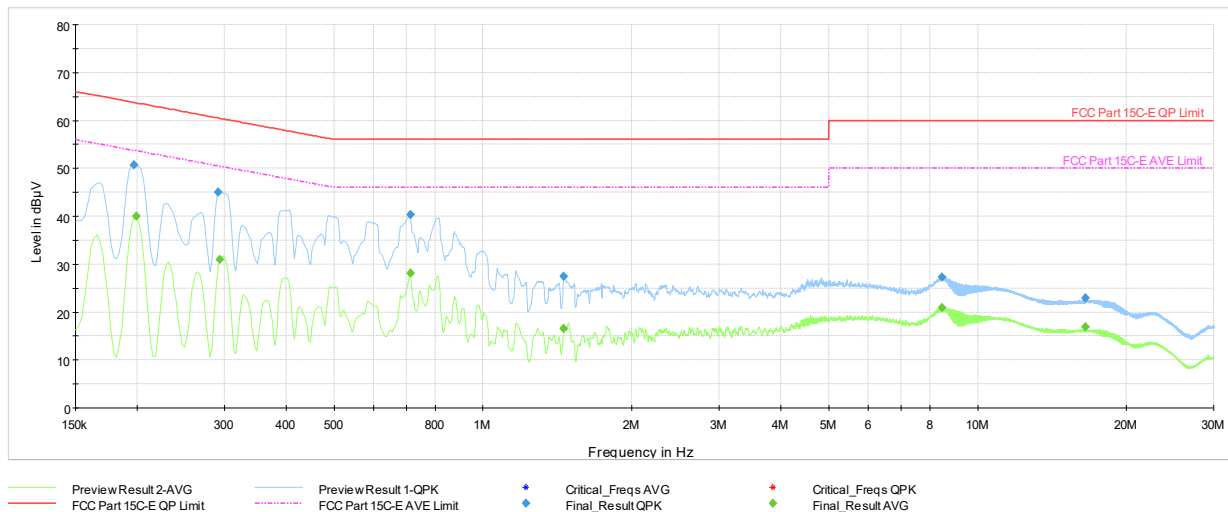


Plot 7-1177. AC Line Conducted Plot with 11be CDD Diversity – RU78 – Ch.40 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.20	FINAL	50.77	---	63.73	-12.96	L1	GND
0.20	FINAL	---	40.07	53.63	-13.56	L1	GND
0.29	FINAL	44.96	---	60.47	-15.51	L1	GND
0.29	FINAL	---	31.02	50.41	-19.39	L1	GND
0.71	FINAL	---	28.09	46.00	-17.91	L1	GND
0.71	FINAL	40.39	---	56.00	-15.61	L1	GND
1.46	FINAL	27.47	---	56.00	-28.53	L1	GND
1.46	FINAL	---	16.56	46.00	-29.44	L1	GND
8.48	FINAL	---	20.88	50.00	-29.12	L1	GND
8.48	FINAL	27.29	---	60.00	-32.71	L1	GND
16.53	FINAL	---	16.90	50.00	-33.10	L1	GND
16.53	FINAL	22.98	---	60.00	-37.02	L1	GND

Table 7-250. AC Line Conducted with 11be CDD Diversity – RU78 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 371 of 375

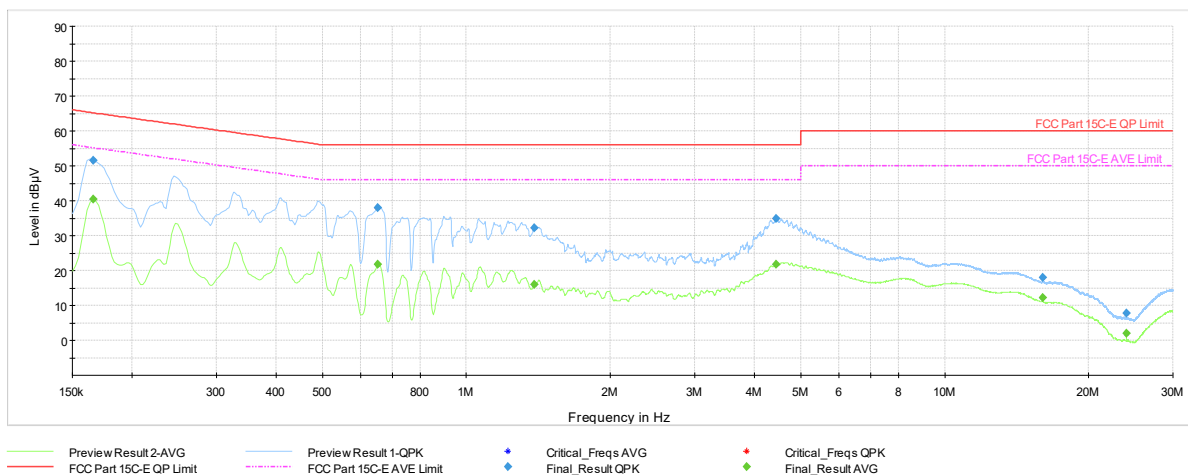


Plot 7-1178. AC Line Conducted Plot with 11be CDD Diversity – RU78 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.17	FINAL	---	40.34	55.17	-14.83	N	GND
0.17	FINAL	51.56	---	65.17	-13.61	N	GND
0.65	FINAL	---	21.76	46.00	-24.24	N	GND
0.65	FINAL	37.93	---	56.00	-18.07	N	GND
1.39	FINAL	---	15.99	46.00	-30.01	N	GND
1.39	FINAL	32.25	---	56.00	-23.75	N	GND
4.45	FINAL	34.92	---	56.00	-21.08	N	GND
4.45	FINAL	---	21.81	46.00	-24.19	N	GND
16.01	FINAL	17.90	---	60.00	-42.10	N	GND
16.01	FINAL	---	12.21	50.00	-37.79	N	GND
24.02	FINAL	---	1.96	50.00	-48.04	N	GND
24.02	FINAL	7.85	---	60.00	-52.15	N	GND

Table 7-251. AC Line Conducted with 11be CDD Diversity – RU78 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 372 of 375

V 10.6 10/27/2023

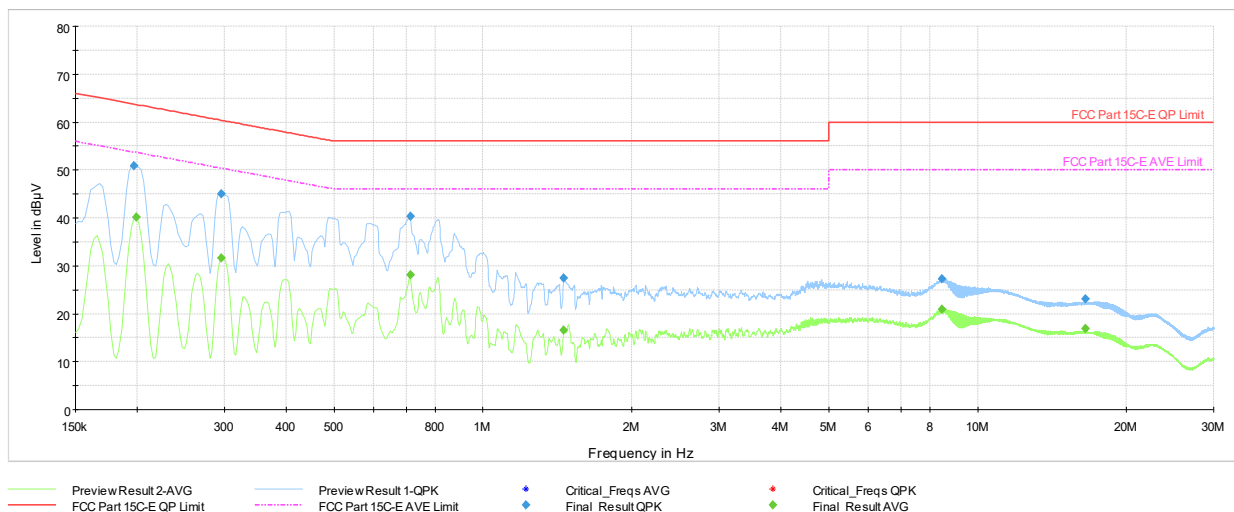


Plot 7-1179. AC Line Conducted Plot with 11be CDD Diversity – RU242 – Ch.40 (L1) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.20	FINAL	50.85	---	63.73	-12.88	L1	GND
0.20	FINAL	---	40.14	53.63	-13.49	L1	GND
0.30	FINAL	---	31.70	50.35	-18.65	L1	GND
0.30	FINAL	44.99	---	60.35	-15.36	L1	GND
0.71	FINAL	40.40	---	56.00	-15.60	L1	GND
0.71	FINAL	---	28.09	46.00	-17.91	L1	GND
1.46	FINAL	27.42	---	56.00	-28.58	L1	GND
1.46	FINAL	---	16.59	46.00	-29.41	L1	GND
8.48	FINAL	---	20.87	50.00	-29.13	L1	GND
8.48	FINAL	27.24	---	60.00	-32.76	L1	GND
16.53	FINAL	---	16.87	50.00	-33.13	L1	GND
16.53	FINAL	23.04	---	60.00	-36.96	L1	GND

Table 7-252. AC Line Conducted with 11be CDD Diversity – RU242 – Ch.40 (L1) with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 373 of 375

V 10.6 10/27/2023

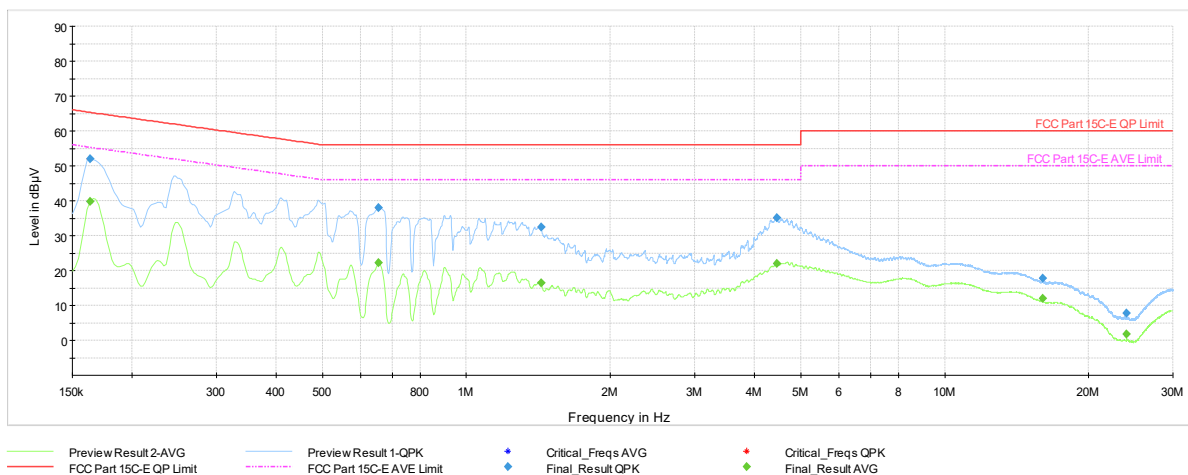

Plot 7-1180. AC Line Conducted Plot with 11be CDD Diversity – RU242 – Ch.40 (N) with AC/DC Adapter

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.16	FINAL	---	39.77	55.28	-15.51	N	GND
0.16	FINAL	52.00	---	65.28	-13.28	N	GND
0.65	FINAL	---	22.18	46.00	-23.82	N	GND
0.65	FINAL	38.02	---	56.00	-17.98	N	GND
1.43	FINAL	---	16.42	46.00	-29.58	N	GND
1.43	FINAL	32.35	---	56.00	-23.65	N	GND
4.45	FINAL	35.21	---	56.00	-20.79	N	GND
4.45	FINAL	---	21.96	46.00	-24.04	N	GND
16.02	FINAL	17.78	---	60.00	-42.22	N	GND
16.02	FINAL	---	12.11	50.00	-37.89	N	GND
24.02	FINAL	---	1.76	50.00	-48.24	N	GND
24.02	FINAL	7.85	---	60.00	-52.15	N	GND

Table 7-253. AC Line Conducted with 11be CDD Diversity – RU242 – Ch.40 (N) with AC/DC Adapter

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 374 of 375

V 10.6 10/27/2023

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Tablet Device FCC ID: BCGA3357** and **IC: 579C-A3357** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

FCC ID: BCGA3357 IC: 579C-A3357		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2504170038-14-R1.BCG	Test Dates: 05/12/2025 - 07/04/2025	EUT Type: Tablet Device	Page 375 of 375

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.