

Prüfbericht-Nr.: <i>Test Report No.:</i>	CN26ABLF 001	Auftrags-Nr.: <i>Order No.:</i>	326184614	Seite 1 von 20 <i>Page 1 of 20</i>
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	1288983	Auftragsdatum: <i>Order date.:</i>	2026-04-30	
Auftraggeber: <i>Client:</i>	IKEA of Sweden AB Box 702, SE-343 81, Älmhult, Sweden			
Prüfgegenstand: <i>Test item:</i>	Door Window Sensor			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	E2705			
Auftrags-Inhalt: <i>Order content:</i>	TÜV Rheinland EMC service			
Prüfgrundlage: <i>Test specification:</i>	FCC 47 CFR Part 15, Subpart B:2024 Class B ICES-003:2020			
Wareneingangsdatum: <i>Date of receipt:</i>	2026-05-06	Refer to the EUT photos file		
Prüfmuster-Nr.: <i>Test sample No.:</i>	A004270071-001~002			
Prüfzeitraum: <i>Testing period:</i>	2026-05-13			
Ort der Prüfung: <i>Place of testing:</i>	Refer to clause 1.1			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shanghai) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: / tested by:  Jiuyu Huang		genehmigt von: / authorized by:  JiaYi Zhou		
Datum: / Date: 2026-06-17		Ausstellungsdatum: / Issue date: 2026-06-17		
Stellung: / Position: Project engineer		Stellung: / Position: Authorizer		
Sonstiges / Other:	FCC ID: FHO-E2705 IC: 10912A-E2705 Test Firm Name: TUV Rheinland (Shanghai) Co., Ltd. Designation Number: CN1396 Test Firm Registration Number: 930979			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: P(ass) = passed a.m. test specifications(s) F(ail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht - Nr.: CN26ABLF 001

Test Report No.:

Seite 2 von 20

Page 2 of 20

Anmerkungen
Remarks

- | | |
|----------|--|
| 1 | <p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</p> <p>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system.</i></p> <p><i>Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p> |
| 2 | <p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature</p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i></p> |
| 3 | <p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.</p> <p>Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i></p> <p><i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p> |
| 4 | <p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p> |

Prüfbericht - Nr.: CN26ABLF 001

Test Report No.:

Seite 3 von 20

Page 3 of 20

Revision history of test report:

Report number	Issue date	Contents and reason for change if appropriate
CN26ABLF 001	2026-06-17	Initial release.

Contents

1	TEST SITES	5
1.1	TEST FACILITIES.....	5
2	GENERAL PRODUCT INFORMATION	6
2.1	PRODUCT FUNCTION AND INTENDED USE	6
2.2	RATINGS AND SYSTEM DETAILS.....	6
2.3	INDEPENDENT OPERATION MODESS	6
2.4	DESCRIPTION OF INTERCONNECTING CABLES	6
2.5	NOISE GENERATING AND NOISE SUPPRESSING PARTS	6
2.6	HIGHEST FREQUENCY GENERATED OR USED IN THE DEVICE OR ON WHICH THE DEVICE OPERATES OR TUNES	6
2.7	SUBMITTED DOCUMENTS.....	6
3	TEST SET-UP AND OPERATION MODES.....	7
3.1	PRINCIPLE OF CONFIGURATION SELECTION	7
3.2	EQUIPMENT AND CABLE ARRANGEMENT.....	7
3.3	TEST SOFTWARE	8
3.4	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	8
3.5	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	8
4	CONFORMITY DECISION RULE.....	9
5	TEST RESULTS EMISSION	10
5.1	EMISSION IN THE FREQUENCY RANGE ABOVE 30 MHz.....	10
5.1.1	Radiated emission (30 MHz - 1 GHz)	10
5.1.2	Radiated emission (Above 1 GHz)	14
6	PHOTOGRAPHS OF THE TEST SET-UP.....	18
7	LIST OF TEST AND MEASUREMENT INSTRUMENTS	19
8	LIST OF FIGURES.....	20

Prüfbericht - Nr.: CN26ABLF 001
Test Report No.:

Seite 5 von 20
Page 5 of 20

1 Test Sites

1.1 Test Facilities

Laboratory: TÜV Rheinland (Shanghai) Co., Ltd.

Address: Workshop 14, North Half of Workshop 10 and Workshop 16, Pingqian (Taicang) Modern Industrial Park, No.525, Yuewang Lingang South Road, Shaxi, Taicang, Jiangsu, China

The used test equipment is in accordance with CISPR 16-1 series standards for measurement of radio interference.

Refer to Clause 6 for test and measurement instruments.

2 General Product Information

2.1 Product Function and Intended Use

The EUT (equipment under test) is a door window sensor. For the further information, refer to the user's manual.

2.2 Ratings and System Details

Rated input : 1*AAA

2.3 Independent Operation Modess

The basic operation mode is on by 2.4 GHz wireless connection.

2.4 Description of interconnecting cables

None.

2.5 Noise Generating and Noise Suppressing Parts

Refer to the circuit diagram for further information.

2.6 Highest frequency generated or used in the device or on which the device operates or tunes

The highest frequency used in the EUT is 2.4 GHz.

2.7 Submitted Documents

Circuit diagram, user's manual and rating label.

3 Test Set-up and Operation Modes

3.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible emission level. The test conditions were adapted accordingly in reference to the instructions for use.


Refer to the related paragraph of this report.

The sequence of testing:

1. Radiated emission tests were performed on 2026-05-13.

3.2 Equipment and cable arrangement

Block diagram for radiated emission test is as follows:

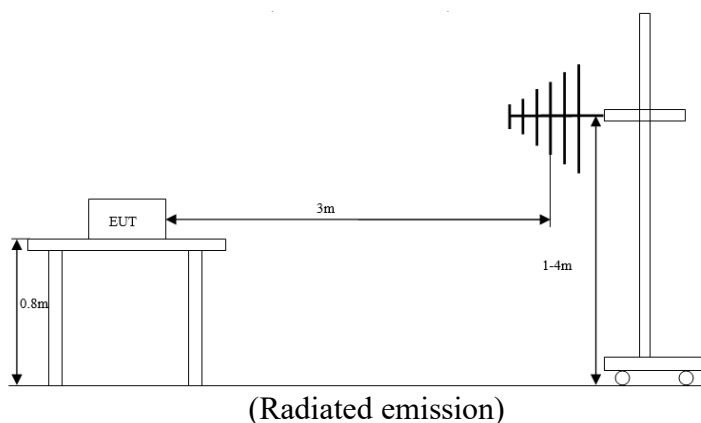

Prüfbericht - Nr.: CN26ABLF 001
Test Report No.:

Seite 8 von 20
Page 8 of 20

3.3 Test Software

No special test software was used during the tests.

3.4 Special Accessories and Auxiliary Equipment

During the tests, the below equipment were used.

No.	Equipment	Model	Manufacturer
1	Lamp	KR722	-

3.5 Countermeasures to achieve EMC Compliance

No other special measure is employed to achieve the requirement.

4 Conformity Decision Rule

For all EMI tests included in this report, as measurement uncertainties are less than the values U_{CISPR} given in CISPR 16-4-2, compliance with the limits is determined by comparing measurement results directly with corresponding limits without taking into consideration of measurement uncertainties.

5 Test Results EMISSION

5.1 Emission in the Frequency Range above 30 MHz

5.1.1 Radiated emission (30 MHz - 1 GHz)

Result:		Passed
Date of testing	: 2026-05-13	
Test procedure	: FCC 47 CFR Part 15, Subpart B:2024, ICES-003:2020, ANSI C63.4-2014 and CISPR 16-2-3	
Frequency range	: 30 – 1000 MHz	
Limits	: Quasi-peak limits (3 m distance): 30 – 88 MHz, 40 dB μ V/m; 88 – 216 MHz, 43.5 dB μ V/m; 216 – 960 MHz, 46 dB μ V/m; Above 960 MHz, 54 dB μ V/m (see Note 1)	
Bandwidth of EMI receiver for final measurement	: 120 kHz	
Measurement time for final measurement	: 1 s	
Kind of test site	: Semi-anechoic chamber	
Operational mode	: Mode as defined in clause 2.3	
Input voltage	: 1*AAA	
Ambient condition	: Temperature: 23.5 °C; Relative humidity: 57.3 %	
Expanded measurement uncertainty ($k=2$)	: 5.40 dB The minimum margin to the limit is 18.7 dB at 30.606250 MHz. The margin is higher than expanded measurement uncertainty.	
Test setup photo	: Photograph 2 of Attachment 1	

The radiated disturbance test was carried out in a semi-anechoic chamber. The test distance from the receiving antenna to the EUT is 3 m. The normalized site attenuation of the semi-anechoic chamber is regularly calibrated to ensure the radiated disturbance test results are valid. During the test, the EUT was placed on a 0.8 m high wooden table above the reference ground plane. The wooden table was rotated 360° around and the height of the antenna was varied from 1 m to 4 m to find the maximum disturbance. The test was performed with the antenna both in its horizontal and vertical polarizations.

The following figures and tables were those measured by an automatic measurement system.

Prüfbericht - Nr.: CN26ABLF 001
Test Report No.:

Seite 11 von 20
Page 11 of 20

A preview test was firstly performed with peak detector. The final test was performed with quasi-peak at those critical frequencies during the preview test. In the following spectral diagram, “×” means quasi-peak test results.

Note 1: The class B limits of FCC 47 CFR Part 15, Subpart B:2024 is stricter than those ICES-003:2020 for 3 m test distance. Therefore, the former limits are used in following figures and tables.

Notes on following tables of radiated emission results and conversions:

QuasiPeak (dB μ V/m): final measurement results by using quasi-peak detector


Corr. (dB): correction factor including: antenna factor, cable loss, and gain of pre-amplifier (if used)

Margin: Limit (dB μ V/m) - QuasiPeak (dB μ V/m)

Prüfbericht - Nr.: CN26ABLF 001
Test Report No.:

Seite 12 von 20
Page 12 of 20

Figure 1: Spectral Diagrams and measurement results, horizontal polarization (30 MHz to 1 GHz)

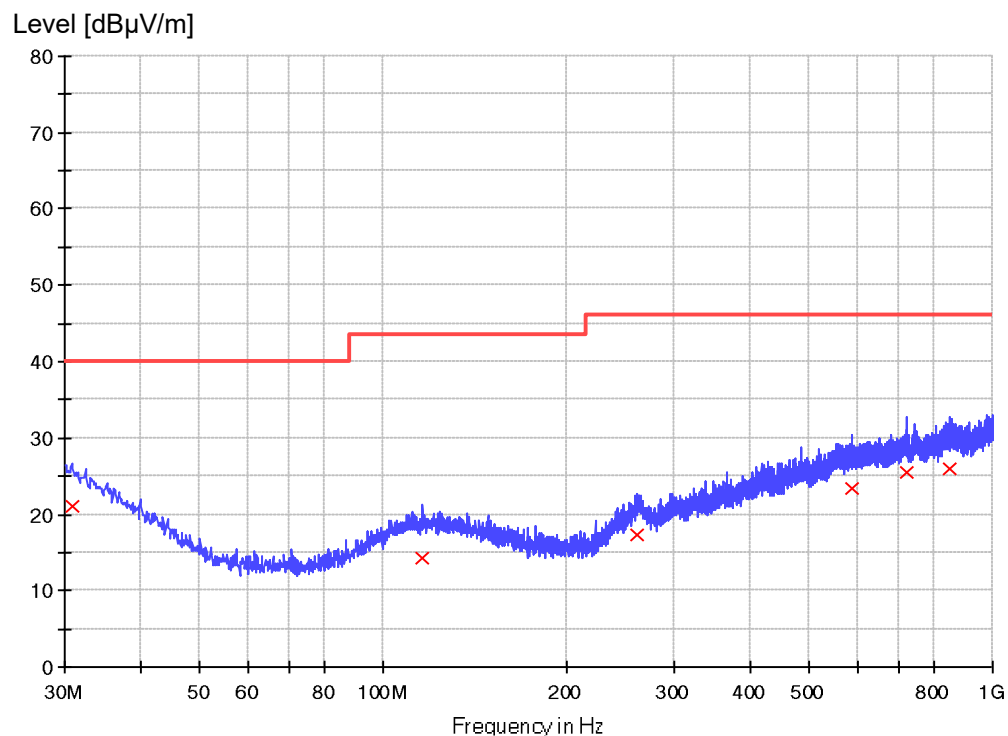


Final Quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
30.848750	21.1	120.000	124.0	H	98.0	25.0	18.9	40.0
116.208750	14.3	120.000	144.0	H	-28.0	18.8	29.2	43.5
261.466250	17.3	120.000	123.0	H	-180.0	21.7	28.7	46.0
588.598750	23.3	120.000	112.0	H	38.0	26.5	22.7	46.0
722.216250	25.4	120.000	137.0	H	-68.0	28.5	20.6	46.0
847.346250	26.0	120.000	104.0	H	120.0	29.0	20.0	46.0

Prüfbericht - Nr.: CN26ABLF 001
Test Report No.:

Seite 13 von 20
Page 13 of 20

Figure 2: Spectral Diagrams and measurement results, vertical polarization (30 MHz to 1 GHz)

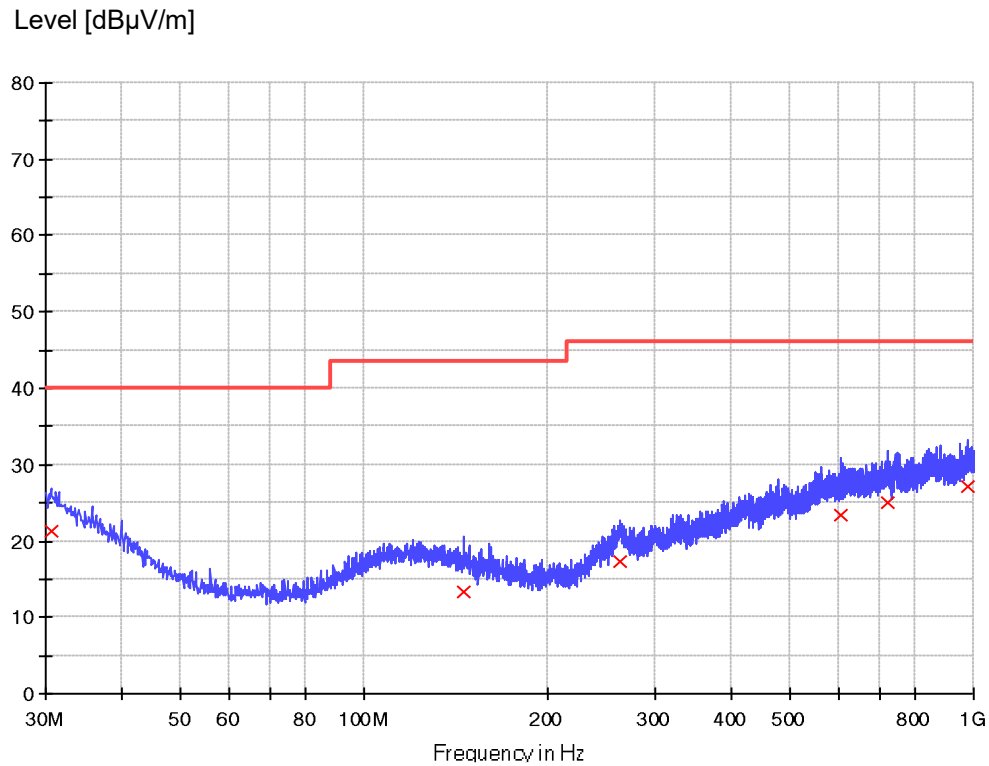

Final Quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
30.606250	21.3	120.000	158.0	V	-75.0	25.1	18.7	40.0
145.430000	13.3	120.000	161.0	V	40.0	17.5	30.2	43.5
262.193750	17.3	120.000	200.0	V	-83.0	21.7	28.7	46.0
606.058750	23.3	120.000	128.0	V	-104.0	26.4	22.7	46.0
720.397500	25.1	120.000	175.0	V	-14.0	28.3	20.9	46.0
975.992500	27.2	120.000	130.0	V	87.0	30.3	18.9	46.0

Prüfbericht - Nr.: CN26ABLF 001
Test Report No.:

Seite 14 von 20
Page 14 of 20

5.1.2 Radiated emission (Above 1 GHz)

Result:	Passed
----------------	---------------

Date of testing	: 2026-05-13
Port	: Enclosure
Test procedure	: FCC 47 CFR Part 15, Subpart B:2024, ANSI C63.4-2014 and CISPR 16-2-3 ICES-003:2020
Limit	: Above 1 GHz, Peak limit: 74 dB μ V/m; Average limit: 54 dB μ V/m
Frequency range	: 1-18 GHz Note: The highest frequency in the EUT is 2.4 GHz. According to FCC Part 15 subpart B §15.33 (b) (1), the upper frequency for radiated emission measurement is 12 GHz. The actual test frequency is up to 18 GHz.
Bandwidth of EMI receiver for final measurement	: 1000 kHz
Measurement time for final measurement	: 1 s
Test distance	: 3 m
Kind of test site	: Semi-anechoic chamber
Operational mode	: Mode as defined in clause 2.3
Input voltage	: 1*AAA
Earthing	: No earthing
Ambient condition	: Temperature: 23.5 °C; Relative humidity: 57.3 %
Expanded measurement uncertainty ($k=2$)	: 5.08 dB The minimum margin to the limit is 6.3 dB at 17989.375000 MHz. The margin is higher than expanded measurement uncertainty.
Test setup photo	: Photograph 2 of Attachment 1

The radiated disturbance test was carried out in a semi-anechoic chamber. The test distance from the receiving antenna to the EUT is 3 m. The normalized site attenuation of the semi-anechoic chamber is regularly calibrated to ensure the radiated disturbance test results are valid. During the test, the EUT was placed on a poly table, which is 0.8 m high. The wooden table was rotated 360° around and the antenna was varied from 1 m to 4 m to find the maximum disturbance. The test was performed with the antenna both in its horizontal and vertical polarizations.

The following figures and tables were those measured by an automatic measurement system. The final test was performed with peak detector and average detector at those critical frequencies during the preview test. In the following figure, “ $\times$ ” means measurement results with peak detector and “ $+$ ” means measurement results with average detector.

Notes on following tables of radiated emission results and conversions:

Peak (dB μ V/m): final measurement results by using peak detector

Average (dB μ V/m): final measurement results by using average detector

Prüfbericht - Nr.: CN26ABLF 001

Test Report No.:

Seite 15 von 20

Page 15 of 20

Corr. (dB): correction factor including: antenna factor, cable loss, and gain of pre-amplifier (if used)


Margin: Limit PK (dB μ V/m) - Peak (dB μ V/m)

Limit CAV (dB μ V/m) – Average (dB μ V/m)

Prüfbericht - Nr.: CN26ABLF 001
Test Report No.:

Seite 16 von 20
Page 16 of 20

Figure 3: Spectral Diagrams and measurement results, 1-18 GHz, horizontal polarization

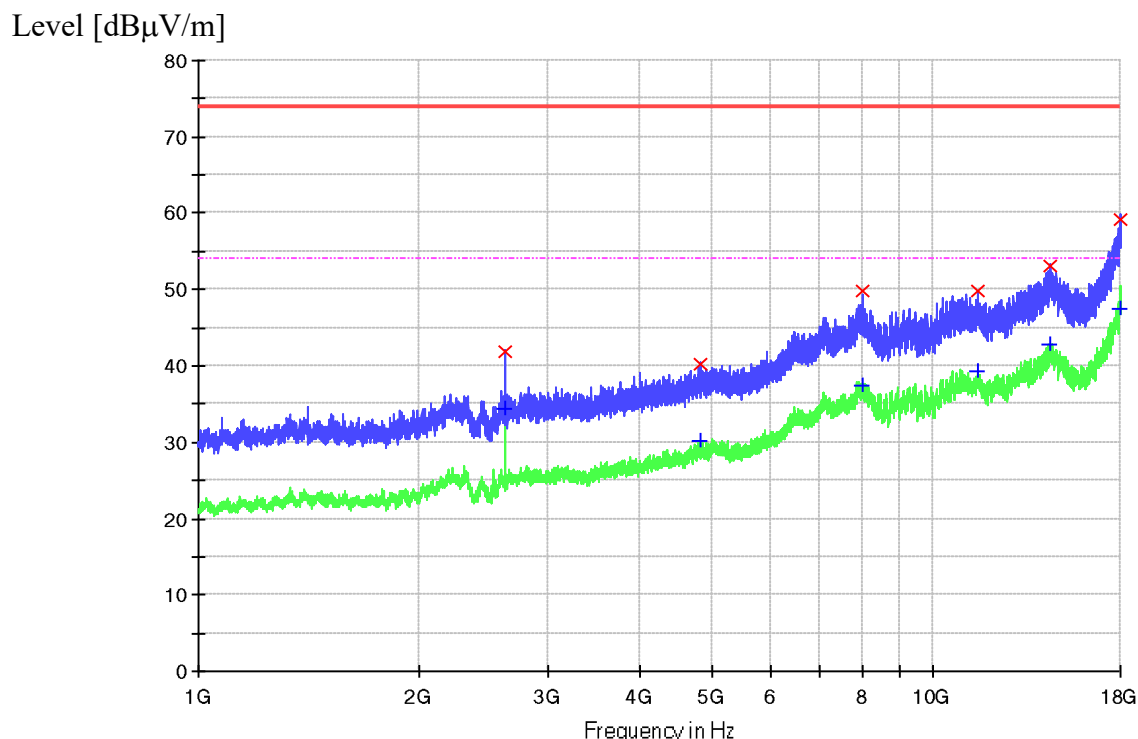

Final Peak measurement results:

Frequency (MHz)	MaxPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dB μ V/)
2613.937500	41.9	1000.0	1000.000	117.0	H	35.0	-15.7	32.1	74.0
4834.562500	40.2	1000.0	1000.000	188.0	H	-4.0	-11.2	33.8	74.0
8035.343750	49.8	1000.0	1000.000	115.0	H	77.0	-3.4	24.2	74.0
11520.343750	49.8	1000.0	1000.000	125.0	H	-73.0	-1.4	24.2	74.0
14477.812500	53.0	1000.0	1000.000	186.0	H	129.0	2.7	21.0	74.0
17980.875000	59.1	1000.0	1000.000	155.0	H	-38.0	11.8	14.9	74.0

Final Average measurement results:


Frequency (MHz)	Average (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dB μ V/)
2613.937500	34.3	1000.0	1000.000	117.0	H	35.0	-15.7	19.7	54.0
4834.562500	30.2	1000.0	1000.000	188.0	H	-4.0	-11.2	23.8	54.0
8035.343750	37.4	1000.0	1000.000	115.0	H	77.0	-3.4	16.6	54.0
11520.343750	39.3	1000.0	1000.000	125.0	H	-73.0	-1.4	14.7	54.0
14477.812500	42.9	1000.0	1000.000	186.0	H	129.0	2.7	11.1	54.0
17980.875000	47.5	1000.0	1000.000	155.0	H	-38.0	11.8	6.5	54.0

Prüfbericht - Nr.: CN26ABLF 001
Test Report No.:

Seite 17 von 20
Page 17 of 20

Figure 4: Spectral Diagrams and measurement results, 1-18 GHz, vertical polarization

Level [dBμV/m]

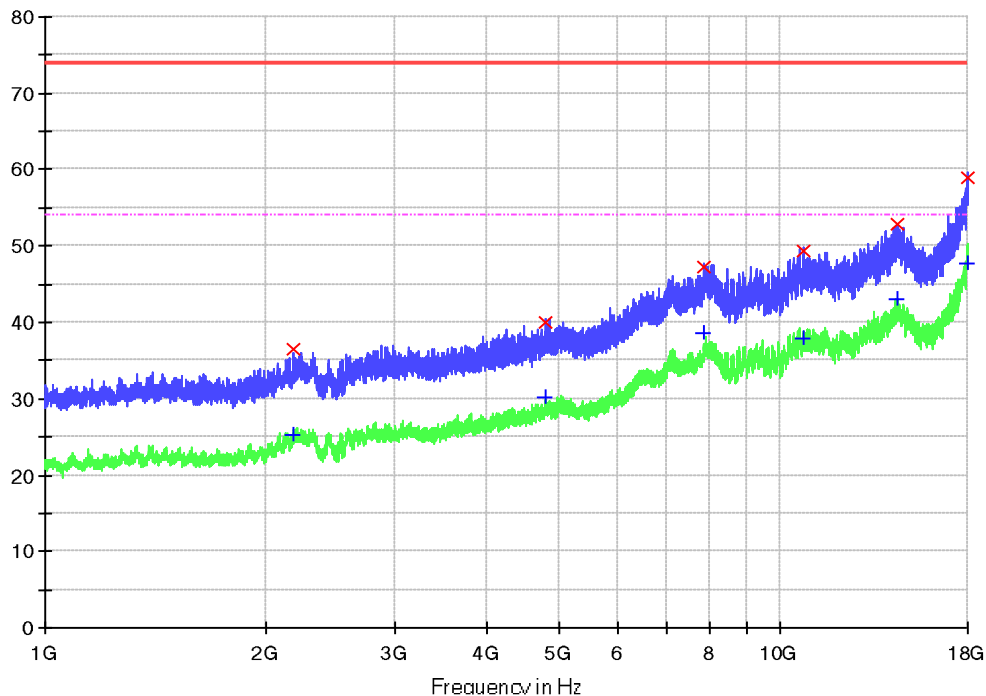

Final Peak measurement results:

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/)
2173.000000	36.5	1000.0	1000.000	199.0	V	139.0	-16.0	37.5	74.0
4787.812500	40.0	1000.0	1000.000	196.0	V	61.0	-11.2	34.0	74.0
7897.750000	47.3	1000.0	1000.000	145.0	V	17.0	-3.8	26.7	74.0
10792.000000	49.5	1000.0	1000.000	129.0	V	-152.0	-2.2	24.5	74.0
14475.687500	53.0	1000.0	1000.000	147.0	V	64.0	2.7	21.1	74.0
17989.375000	58.9	1000.0	1000.000	166.0	V	102.0	11.9	15.1	74.0

Final Average measurement results:

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/)
2173.000000	25.3	1000.0	1000.000	199.0	V	139.0	-16.0	28.7	54.0
4787.812500	30.3	1000.0	1000.000	196.0	V	61.0	-11.2	23.7	54.0
7897.750000	38.6	1000.0	1000.000	145.0	V	17.0	-3.8	15.4	54.0
10792.000000	38.0	1000.0	1000.000	129.0	V	-152.0	-2.2	16.1	54.0
14475.687500	43.0	1000.0	1000.000	147.0	V	64.0	2.7	11.0	54.0
17989.375000	47.7	1000.0	1000.000	166.0	V	102.0	11.9	6.3	54.0

Prüfbericht - Nr.: CN26ABLF 001
Test Report No.:

Seite 18 von 20
Page 18 of 20

6 Photographs of the Test Set-Up

Refer to the test setup file.

Prüfbericht - Nr.: CN26ABLF 001
Test Report No.:

Seite 19 von 20
Page 19 of 20

7 List of Test and Measurement Instruments

Equip. no.	Equipment name	Model	Serial no.	Manufacturer	Cal. date	Due date
EMC-S-032	EMI measurement software	EMC32-MEB (10.60.20)	100697	Rohde & Schwarz	N/A	N/A
EMC-C-155	BiLog antenna	CBL 6112D	40530	Teseq	2025-03-24	2026-09-24
EMC-C-121	Thermohygrometer	608-H1	1241320265	testo	2025-06-05	2026-06-05
EMC-C-066	EMI test receiver	ESCI	100280	Rohde & Schwarz	2025-09-28	2026-09-28
EMC-C-001	3 m semi-anechoic chamber	SAC3	FJ129002	Frankonia	2023-12-03	2026-12-03
EMC-C-175	Preamplifier	EMC051845SE	980612	EMCI Taiwan	2025-07-11	2026-07-11
EMC-C-161	Spectrum analyser	FSV40	101258	Rohde & Schwarz	2025-07-11	2026-07-11
EMC-C-019	Double ridged horn antenna	BBHA 9120 D	9120D-433	Schwarzbeck	2025-02-28	2026-08-28

Prüfbericht - Nr.: CN26ABLF 001
Test Report No.:

Seite 20 von 20
Page 20 of 20

8 List of Figures

Figure 1: Spectral Diagrams and measurement results, horizontal polarization (30 MHz to 1 GHz)	12
Figure 2: Spectral Diagrams and measurement results, vertical polarization (30 MHz to 1 GHz)	13
Figure 3: Spectral Diagrams and measurement results, 1-18 GHz, horizontal polarization	16
Figure 4: Spectral Diagrams and measurement results, 1-18 GHz, vertical polarization	17

End of test report