

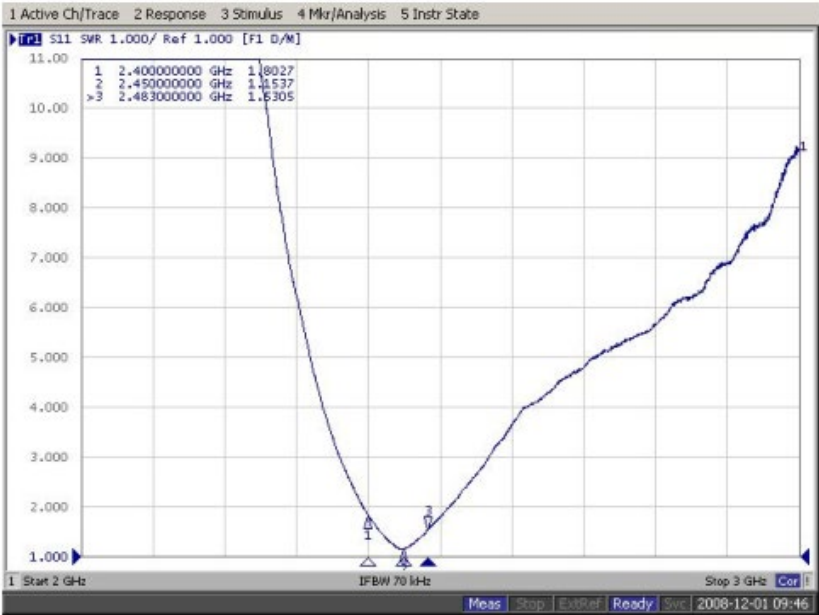


Model name: X-2-3 2. 4G-NF17

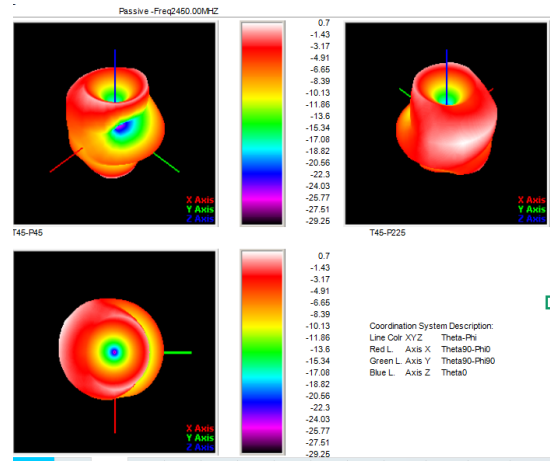

电气参数	ELECTRICAL SPECIFICATIONS	机械特性	MECHANICAL SPECIFICATIONS
频率范围	2402-2480MHz	高度	10± mm
Frequency Range		Height	
输入阻抗	50 Ω	Antenna Type	PCB Antenna
Impedance			
驻波比	≤5	天线重量	1±0.2g
VSWR		Antenna Weight	
增益	1 dBi		
Gain			
极化方式	垂直 Vertical		
Polarization			
辐射方向	全向 Omni		
Radiation			
功率容量	0.5W		
Maximum Power Input-watts			

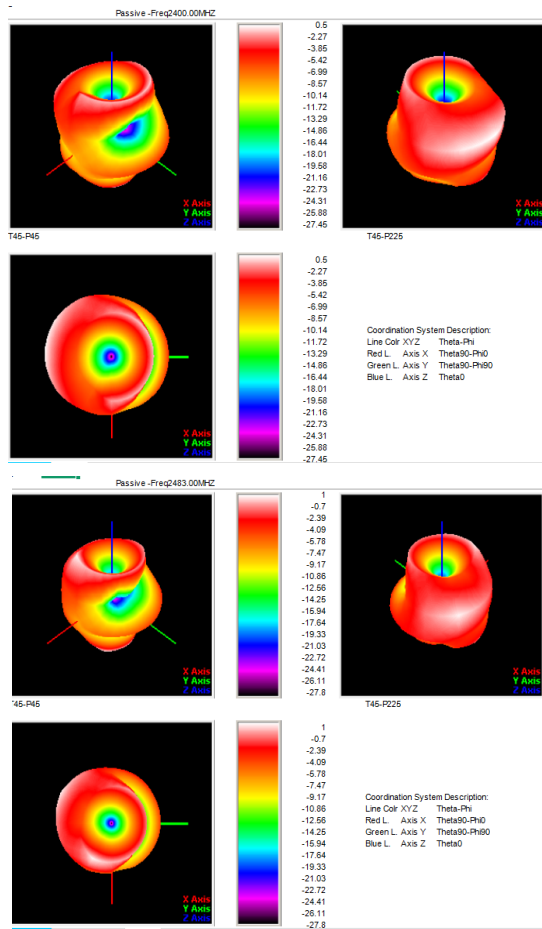

Test Point ID	Freq. (MHz)	TRP (dBm)	Gain (dBi)	Directivity (dB)	Efficiency (%)	Efficiency (dB)	Max (dBm)	Theta of Max	Phi of Max	Min (dBm)	Theta of Min	Phi of Min	AVG (dBm)	Max/Min (dB)	Max/AVG (dB)	Min/AVG (dB)
1	2400.0	2400.00	0.50	4.37	31.1%	-5.07	-0.70	60	270	-27.45	60	90	-5.33	26.76	4.64	-22.12
2	2450.0	2450.00	0.70	4.44	38.6%	-4.14	0.30	60	240	-29.25	60	60	-4.40	29.55	4.71	-24.85
3	2483.0	2483.00	1.00	4.54	44.3%	-3.54	1.00	150	30	-27.80	60	60	-3.79	28.80	4.79	-24.01