

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No...... : **MTEB26010198-R2**

FCC ID..... : **O89AOCX**

Compiled by

(position+printed name+signature)..: File administrators Alisa Luo




Supervised by

(position+printed name+signature)..: Test Engineer Sunny Deng



Approved by

(position+printed name+signature)..: Manager Yvette Zhou



Date of issue..... : **Jan.23,2026**

Representative Laboratory Name. : **Shenzhen Most Technology Service Co., Ltd.**

Address..... : No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park,
Nanshan, Shenzhen, Guangdong, China.

Applicant's name..... : **Xiamen Pinnacle Electrical Co.,Ltd.**

Address..... : 4F, Guang Xia Building, Torch High-Tech Zone, Xiamen, China

Test specification..... :

Standard..... : **FCC Part 15.247**

TRF Originator..... : Shenzhen Most Technology Service Co., Ltd.

Shenzhen Most Technology Service Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Most Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Most Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description..... : All-in-one Touch POS

Trade Mark..... : ACLAS

Model/Type reference..... : AOCX

Listed Models : AODX

Modulation Type..... : b: DSSS
g/n/ax:OFDM

Operation Frequency..... : From 2412MHz~2462MHz

Hardware Version..... : EPAOX6IMB

Software Version..... : /

Rating..... : DC 13.8V by Adapter
DC 7.4V by Battery

Result..... : **PASS**

TEST REPORT

Equipment under Test : All-in-one Touch POS

Model /Type : AOCX

Listed Models : AODX

Remark : Their electrical circuit design, layout, components used, and internal wiring are identical.Only the model names are different.

Applicant : Xiamen Pinnacle Electrical Co.,Ltd.

Address : 4F, Guang Xia Building, Torch High-Tech Zone, Xiamen, China

Manufacturer : Xiamen Pinnacle Electrical Co.,Ltd.

Address : 4F, Guang Xia Building, Torch High-Tech Zone, Xiamen, China

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1 REVISION HISTORY	4
2 TEST STANDARDS	5
3 SUMMARY	6
3.1 General Remarks	6
3.2 Product Description	6
3.3 Equipment Under Test	6
3.4 Short description of the Equipment under Test (EUT)	6
3.5 EUT operation mode	6
3.6 Block Diagram of Test Setup	7
3.7 Test Item (Equipment Under Test) Description*	7
3.8 Auxiliary Equipment (AE) Description	7
3.9 Antenna Information*	7
3.10 Related Submittal(s) / Grant (s)	8
3.11 Modifications	8
3.12 EUT configuration	8
4 TEST ENVIRONMENT	9
4.1 Address of the test laboratory	9
4.2 Test Facility	9
4.3 Environmental conditions	9
4.4 Test Description	10
4.5 Statement of the measurement uncertainty	10
4.6 Equipments Used during the Test	11
5 TEST CONDITIONS AND RESULTS	12
5.1 AC Power Conducted Emission	12
5.2 Radiated Emission	17
5.3 Maximum Conducted Output Power	27
5.4 Power Spectral Density	28
5.5 6dB Bandwidth	29
5.6 Out-of-band Emissions	30
5.7 Duty Cycle Information	31
5.8 Antenna Requirement	32
6 TEST SETUP PHOTOS OF THE EUT	33
7 PHOTOS OF THE EUT	35
APPENDIX I. Conducted Output Power	36
APPENDIX II. 99% Bandwidth	37
APPENDIX III. 6dB Bandwidth	40
APPENDIX IV. Conducted Spurious & Band Edge Emission	43
APPENDIX V. Duty Cycle	51
APPENDIX VI. Power Spectral Density	54

1 Revision History

Revision	Issue Date	Revisions	Revised By
00	2026.01.23	Initial Issue	Alisa Luo

2 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2020](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 v05r02](#): Guidance for Compliance Measurements on Digital Transmission Systems (DTS) ,Frequency Hopping Spread Spectrum System(HFSS), and Hybrid System Devices Operating Under §15.247 of The FCC rules.

3 SUMMARY

3.1 General Remarks

Date of receipt of test sample	:	2026.01.03
Testing commenced on	:	2026.01.04
Testing concluded on	:	2026.01.23

3.2 Product Description

Product Name:	All-in-one Touch POS
Model/Type reference:	AOCX
Power Supply:	DC 13.8V by Adapter DC 7.4V by Battery
Testing sample ID:	MTYP11669/11670
WIFI :	
Supported type:	802.11b/802.11g/802.11n(H20)/802.11n(H40)/802.11ax(H20) /802.11ax(H40)
Modulation:	b: DSSS g/n/ax: OFDM
Operation frequency:	802.11b/802.11g/802.11n(H20)/802.11ax(H20): 2412MHz~2462MHz 802.11n(H40)/802.11ax(H40): 2422MHz~2452MHz
Channel number:	802.11b/802.11g/802.11n(H20)/802.11ax(H20): 11 802.11n(H40)/802.11ax(H40): 7
Channel separation:	5MHz
Antenna type:	FPC Antenna
Antenna gain:	4.11dBi

3.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 13.8V by Adapter
DC 7.4V by Battery

3.4 Short description of the Equipment under Test (EUT)

This is a All-in-one Touch POS For more details, refer to the user's manual of the EUT.


3.5 EUT operation mode

The application provider specific test software(AT command) to control sample in continuous TX and RX (Duty Cycle >98%) for testing meet KDB558074 test requirement.

IEEE 802.11b/g/n: Thirteen channels are provided to the EUT.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

3.6 Block Diagram of Test Setup

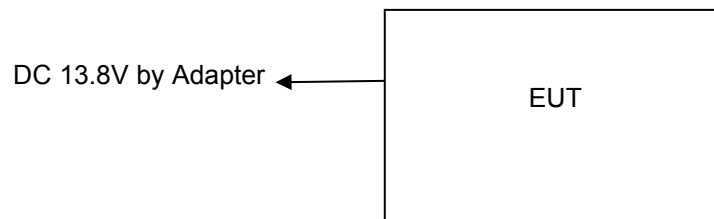

3.7 Test Item (Equipment Under Test) Description*

Short designation	EUT Name	EUT Description	Serial number	Hardware status	Software status
EUT A	Adapter	65W138250	/	/	/
EUT B	/	/	/	/	/

*: declared by the applicant. According to customers information EUTs A and B are the same devices.

3.8 Auxiliary Equipment (AE) Description

AE short designation	EUT Name (if available)	EUT Description	Serial number (if available)	Software (if used)
AE 1	/	/	/	/
AE 2	/	/	/	/

3.9 Antenna Information*

Short designation	Antenna Name	Antenna Type	Frequency Range	Serial number	Antenna Peak Gain
Antenna 1	---	FPC Antenna	2.4 – 2.5 GHz	---	4.11dBi
Antenna 2					

*: declared by the applicant.

3.10 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: O89AOCX** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

3.11 Modifications

No modifications were implemented to meet testing criteria.

3.12 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - Supplied by the lab

●	ADAPTER	M/N:	65W138250
		Manufacturer:	Xiamen Junhao Technology Co.,Ltd

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

Shenzhen Most Technology Service Co., Ltd.

No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.
The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

4.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 0031192610

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

A2LA-Lab Cert. No.: 6343.01

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

4.3 Environmental conditions

Radiated Emission:

Temperature:	24 ° C
Humidity:	48 %
Atmospheric pressure:	950-1050mbar

AC Main Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

4.4 Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission Radiated Emission 9KHz~1GHz& Radiated Emission 1GHz~10 th Harmonic	11b/DSSS	1 Mbps	1/6/11
	11g/OFDM	6 Mbps	1/6/11
	11n(20MHz)/OFDM 11ax(20MHz)/OFDM	6.5Mbps	1/6/11
	11n(20MHz)/OFDM 11ax(20MHz)/OFDM	6.5Mbps	3/6/9
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n(20MHz)/OFDM 11ax(20MHz)/OFDM	6.5Mbps	1/11
	11n(20MHz)/OFDM 11ax(20MHz)/OFDM	6.5Mbps	3/9

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Most Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Most Technology Service Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)
6dB Bandwidth	/	5%	(1)
Maximum Conducted Output Power	/	0.80dB	(1)
Spurious RF Conducted Emission	/	1.6dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.6 Equipments Used during the Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware versions	Last Cal.
1.	L.I.S.N.	R&S	ENV216	100093	/	2025/03/04
2	Three-phase artificial power network	Schwarzback Mess	NNLK8129	8129178	/	2025/03/04
3.	Receiver	R&S	ESCI	100492	V3.0-10-2	2025/03/04
4	Receiver	R&S	ESPI	101202	V3.0-10-2	2025/03/04
5	Spectrum analyzer	Agilent	9020A	MT-E306	A14.16	2025/03/04
6	Bilong Antenna	Sunol Sciences	JB3	A121206	/	2025/11/22
7	Horn antenna	HF Antenna	HF Antenna	MT-E158	/	2025/03/16
8	Loop antenna	Beijing Daze	ZN30900B	/	/	2025/03/04
9	Horn antenna	R&S	OBH100400	26999002	/	2025/03/16
10	Wireless Communication Test Set	R&S	CMW500	/	CMW-BASE-3.7.21	2025/03/04
11	Spectrum analyzer	R&S	FSP	100019	V4.40 SP2	2025/03/04
12	High gain antenna	Schwarzbeck	LB-180400KF	MT-E389	/	2025/03/04
13	Preamplifier	Schwarzbeck	BBV 9743	MT-E390	/	2025/03/04
14	Pre-amplifier	EMCI	EMC051845S E	MT-E391	/	2025/03/04
15	Pre-amplifier	Agilent	83051A	MT-E392	/	2025/03/04
16	High pass filter unit	Tonscend	JS0806-F	MT-E393	/	2025/03/04
17	RF Cable(below1GHz)	Times	9kHz-1GHz	MT-E394	/	2025/03/04
18	RF Cable(above 1GHz)	Times	1-40G	MT-E395	/	2025/03/04
19	RF Cable (9KHz-40GHz)	Tonscend	170660	N/A	/	2025/03/04
20	Power meter	R&S	NRVS	100444	/	2025/03/04

Note: The Cal.Interval was one year.

5 TEST CONDITIONS AND RESULTS

5.1 AC Power Conducted Emission

TEST CONFIGURATION

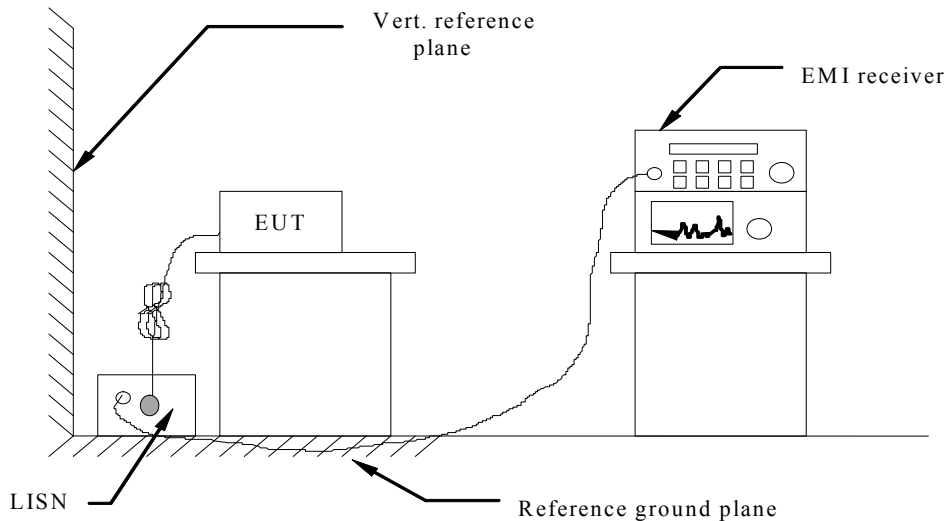

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2020.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2020
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2020
- 4 The EUT received DC 13.8V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

Remark:


1.WIFI modes were test at 802.11b/802.11g/802.11n (H20) /802.11n (H40)/802.11ax(H20) /802.11ax(H40) (Low, Middle, and High channel); only the worst result of 802.11b Middle Channel was reported as below:

Power supply:

DC 13.8V by Adapter

Polarization

L (model: AOCX)

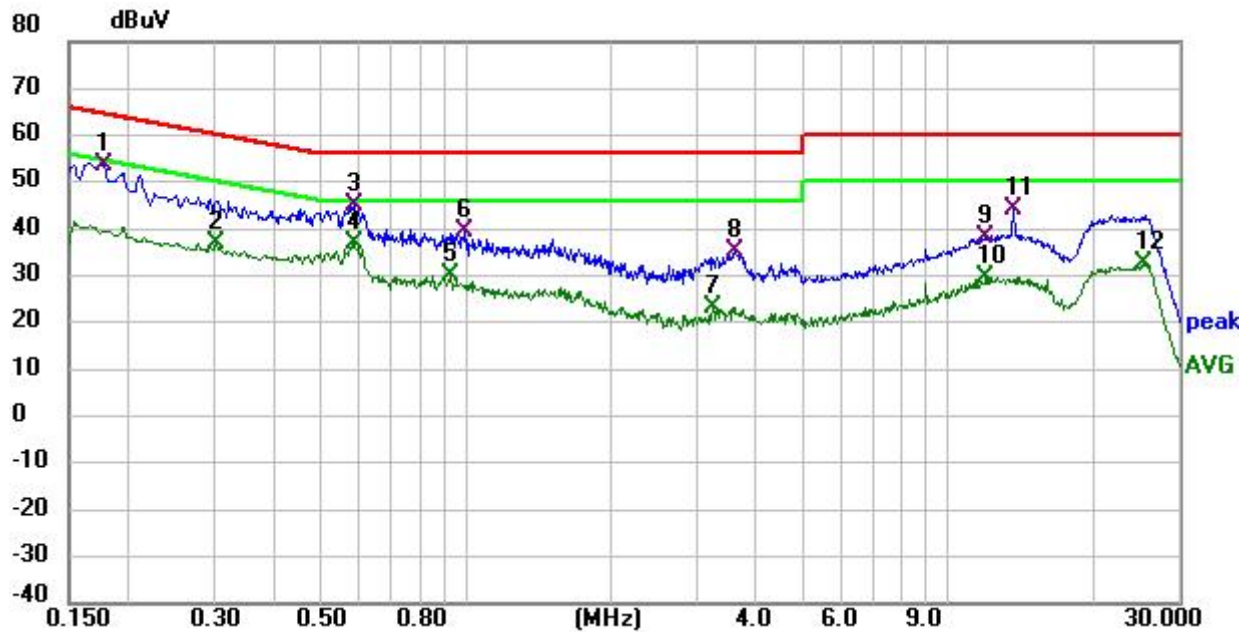

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1780	44.23	9.61	53.84	64.58	-10.74	QP	P	
2	0.3020	27.41	9.59	37.00	50.19	-13.19	AVG	P	
3	0.5860	35.36	9.59	44.95	56.00	-11.05	QP	P	
4 *	0.5860	27.42	9.59	37.01	46.00	-8.99	AVG	P	
5	0.9260	20.31	9.60	29.91	46.00	-16.09	AVG	P	
6	0.9980	29.87	9.60	39.47	56.00	-16.53	QP	P	
7	3.2659	13.78	9.61	23.39	46.00	-22.61	AVG	P	
8	3.6140	25.47	9.62	35.09	56.00	-20.91	QP	P	
9	11.9500	28.39	9.69	38.08	60.00	-21.92	QP	P	
10	11.9500	19.91	9.69	29.60	50.00	-20.40	AVG	P	
11	13.6580	34.70	9.70	44.40	60.00	-15.60	QP	P	
12	25.3860	22.68	9.75	32.43	50.00	-17.57	AVG	P	


*:Maximum data x:Over limit !:over margin

Power supply:

DC 13.8V by Adapter

Polarization

N (model: AOCX)

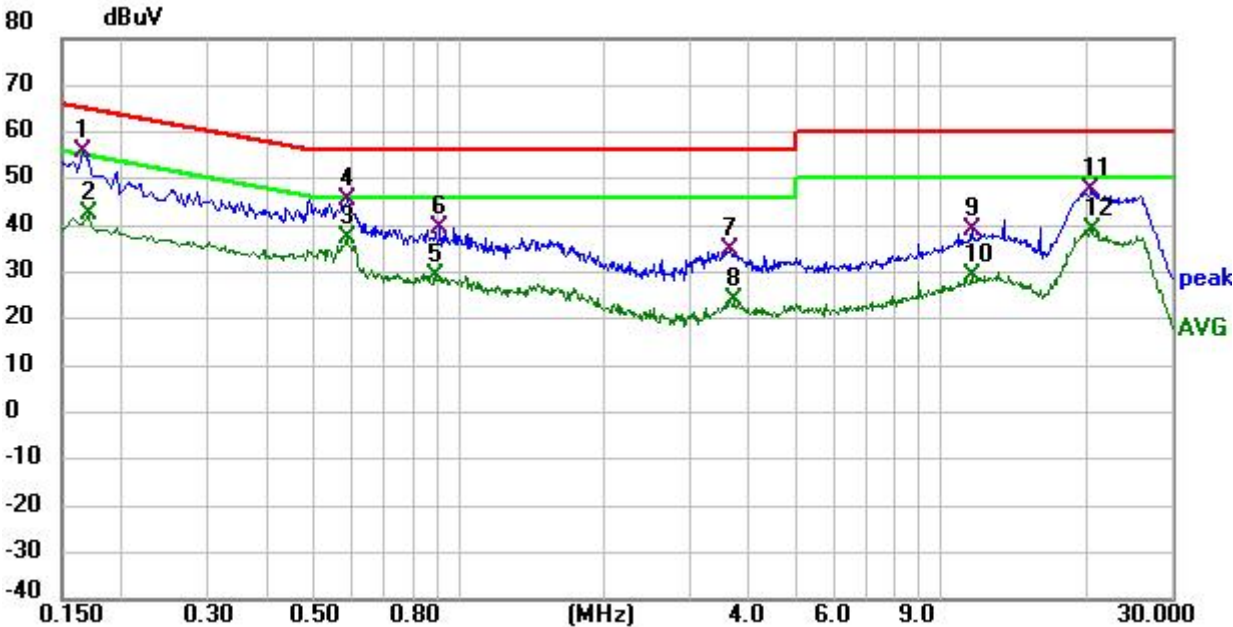

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1660	46.11	9.61	55.72	65.16	-9.44	QP	P	
2	0.1700	32.87	9.61	42.48	54.96	-12.48	AVG	P	
3 *	0.5860	27.85	9.59	37.44	46.00	-8.56	AVG	P	
4	0.5899	36.05	9.59	45.64	56.00	-10.36	QP	P	
5	0.8940	19.48	9.60	29.08	46.00	-16.92	AVG	P	
6	0.9180	29.91	9.60	39.51	56.00	-16.49	QP	P	
7	3.6540	25.37	9.62	34.99	56.00	-21.01	QP	P	
8	3.7060	14.62	9.62	24.24	46.00	-21.76	AVG	P	
9	11.6020	29.48	9.69	39.17	60.00	-20.83	QP	P	
10	11.6020	19.54	9.69	29.23	50.00	-20.77	AVG	P	
11	20.4820	37.80	9.73	47.53	60.00	-12.47	QP	P	
12	20.4900	29.42	9.73	39.15	50.00	-10.85	AVG	P	


*:Maximum data x:Over limit !:over margin

Power supply:

DC 13.8V by Adapter

Polarization

L (model: AODX)

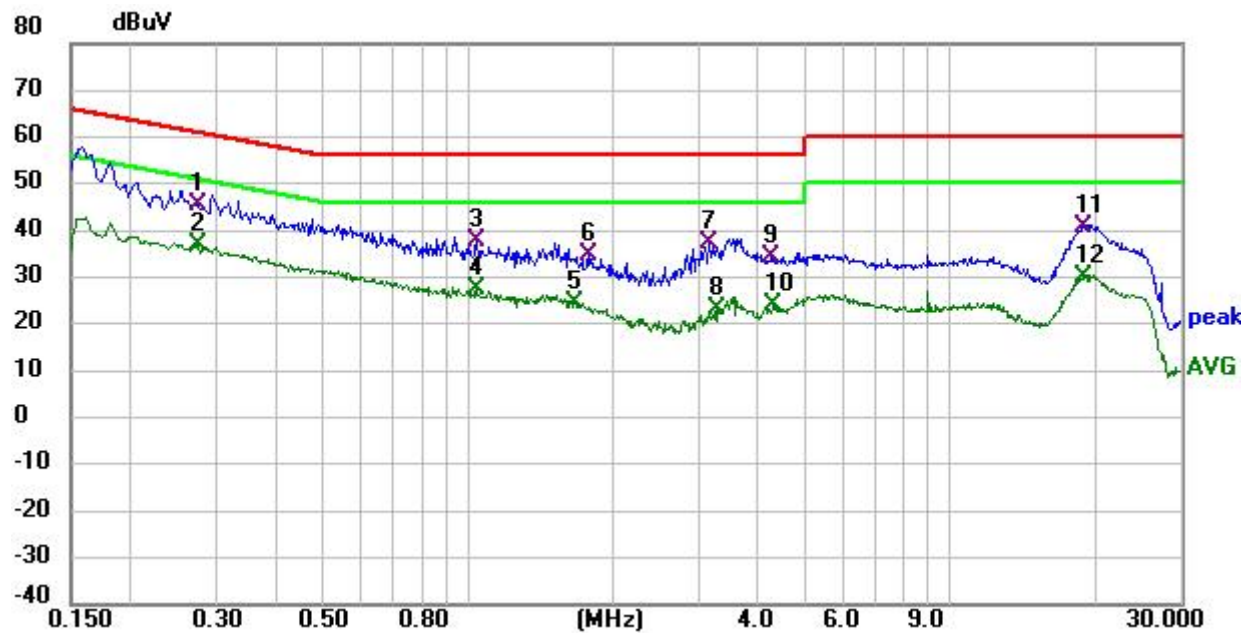

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2740	35.87	9.60	45.47	61.00	-15.53	QP	P	
2 *	0.2740	27.41	9.60	37.01	51.00	-13.99	AVG	P	
3	1.0380	28.20	9.60	37.80	56.00	-18.20	QP	P	
4	1.0380	18.10	9.60	27.70	46.00	-18.30	AVG	P	
5	1.6660	14.99	9.60	24.59	46.00	-21.41	AVG	P	
6	1.7740	25.35	9.60	34.95	56.00	-21.05	QP	P	
7	3.1700	27.80	9.61	37.41	56.00	-18.59	QP	P	
8	3.2900	13.43	9.61	23.04	46.00	-22.96	AVG	P	
9	4.2619	24.67	9.62	34.29	56.00	-21.71	QP	P	
10	4.3100	14.62	9.62	24.24	46.00	-21.76	AVG	P	
11	18.8980	31.01	9.72	40.73	60.00	-19.27	QP	P	
12	18.9700	20.51	9.72	30.23	50.00	-19.77	AVG	P	


*:Maximum data x:Over limit !:over margin

Power supply:

DC 13.8V by Adapter

Polarization

N (model: AODX)

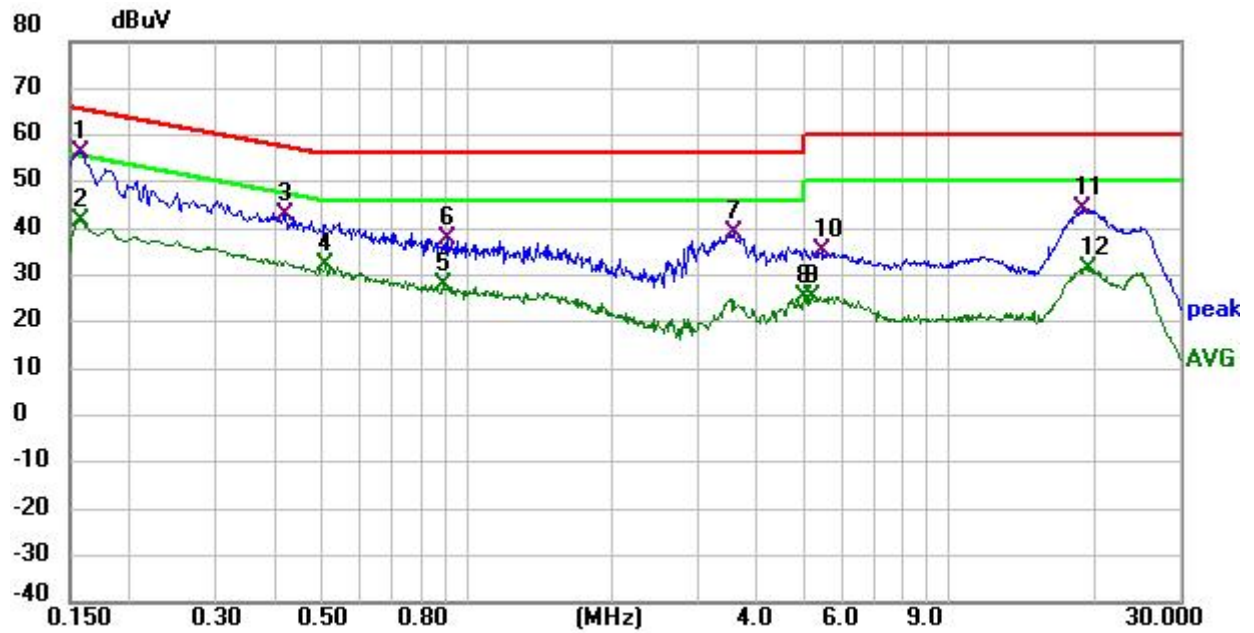

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1580	46.67	9.60	56.27	65.57	-9.30	QP	P	
2	0.1580	31.92	9.60	41.52	55.57	-14.05	AVG	P	
3	0.4180	33.51	9.59	43.10	57.49	-14.39	QP	P	
4	0.5100	22.59	9.59	32.18	46.00	-13.82	AVG	P	
5	0.8940	18.24	9.60	27.84	46.00	-18.16	AVG	P	
6	0.9180	28.06	9.60	37.66	56.00	-18.34	QP	P	
7	3.5660	29.55	9.62	39.17	56.00	-16.83	QP	P	
8	4.9980	15.67	9.63	25.30	46.00	-20.70	AVG	P	
9	5.1979	15.86	9.63	25.49	50.00	-24.51	AVG	P	
10	5.4380	25.78	9.63	35.41	60.00	-24.59	QP	P	
11	18.9500	34.49	9.72	44.21	60.00	-15.79	QP	P	
12	19.5060	21.80	9.73	31.53	50.00	-18.47	AVG	P	

*:Maximum data x:Over limit !:over margin

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

$$\text{Transd}=AF +CL-AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. All three channels (lowest/middle/highest) of each mode were measured below 1GHz and recorded worst case at 802.11b low channel.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
4. Remark: Result=Reading value+Factor


For 30MHz-1GHz

Horizontal (model: AOCX)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	172.6400	6.35	16.88	23.23	43.50	-20.27	QP	200	50	P	
2	212.4400	3.48	15.10	18.58	43.50	-24.92	QP	200	100	P	
3	381.2800	15.63	18.04	33.67	46.00	-12.33	QP	200	150	P	
4	510.0400	3.16	22.81	25.97	46.00	-20.03	QP	200	200	P	
5	533.0000	3.58	23.06	26.64	46.00	-19.36	QP	200	250	P	
6 *	957.0000	5.82	29.57	35.39	46.00	-10.61	QP	200	300	P	

*:Maximum data x:Over limit !:over margin

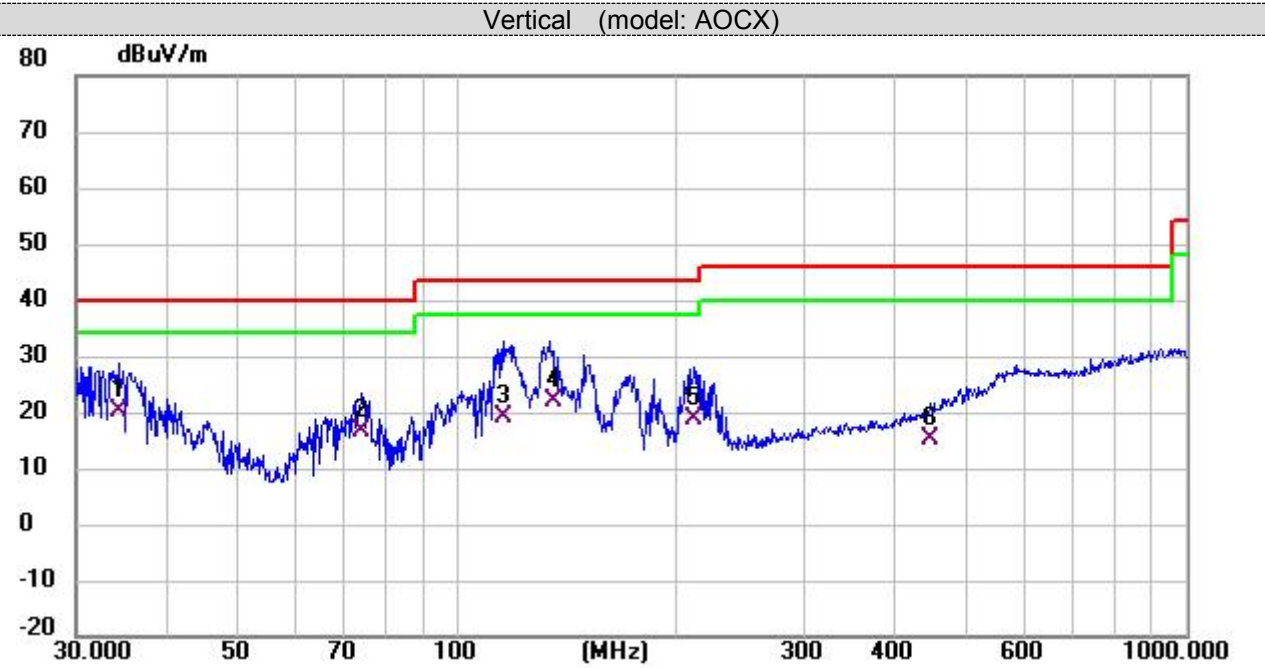

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	34.3600	2.35	17.94	20.29	40.00	-19.71	QP	100	50	P	
2	74.1600	6.83	9.63	16.46	40.00	-23.54	QP	100	100	P	
3	116.2400	3.74	15.39	19.13	43.50	-24.37	QP	100	150	P	
4	135.8000	5.82	16.29	22.11	43.50	-21.39	QP	100	200	P	
5	211.6000	3.65	15.11	18.76	43.50	-24.74	QP	100	250	P	
6	447.2800	-5.27	20.43	15.16	46.00	-30.84	QP	100	300	P	


*:Maximum data x:Over limit !:over margin

For 30MHz-1GHz



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	75.6000	3.62	10.22	13.84	40.00	-26.16	QP	200	50	P	
2	107.2400	2.14	14.40	16.54	43.50	-26.96	QP	200	100	P	
3	171.0399	13.69	16.93	30.62	43.50	-12.88	QP	200	150	P	
4	207.1200	15.82	15.14	30.96	43.50	-12.54	QP	200	200	P	
5	550.5600	3.99	23.26	27.25	46.00	-18.75	QP	200	250	P	
6 *	837.9200	5.49	28.32	33.81	46.00	-12.19	QP	200	300	P	

*:Maximum data x:Over limit !:over margin

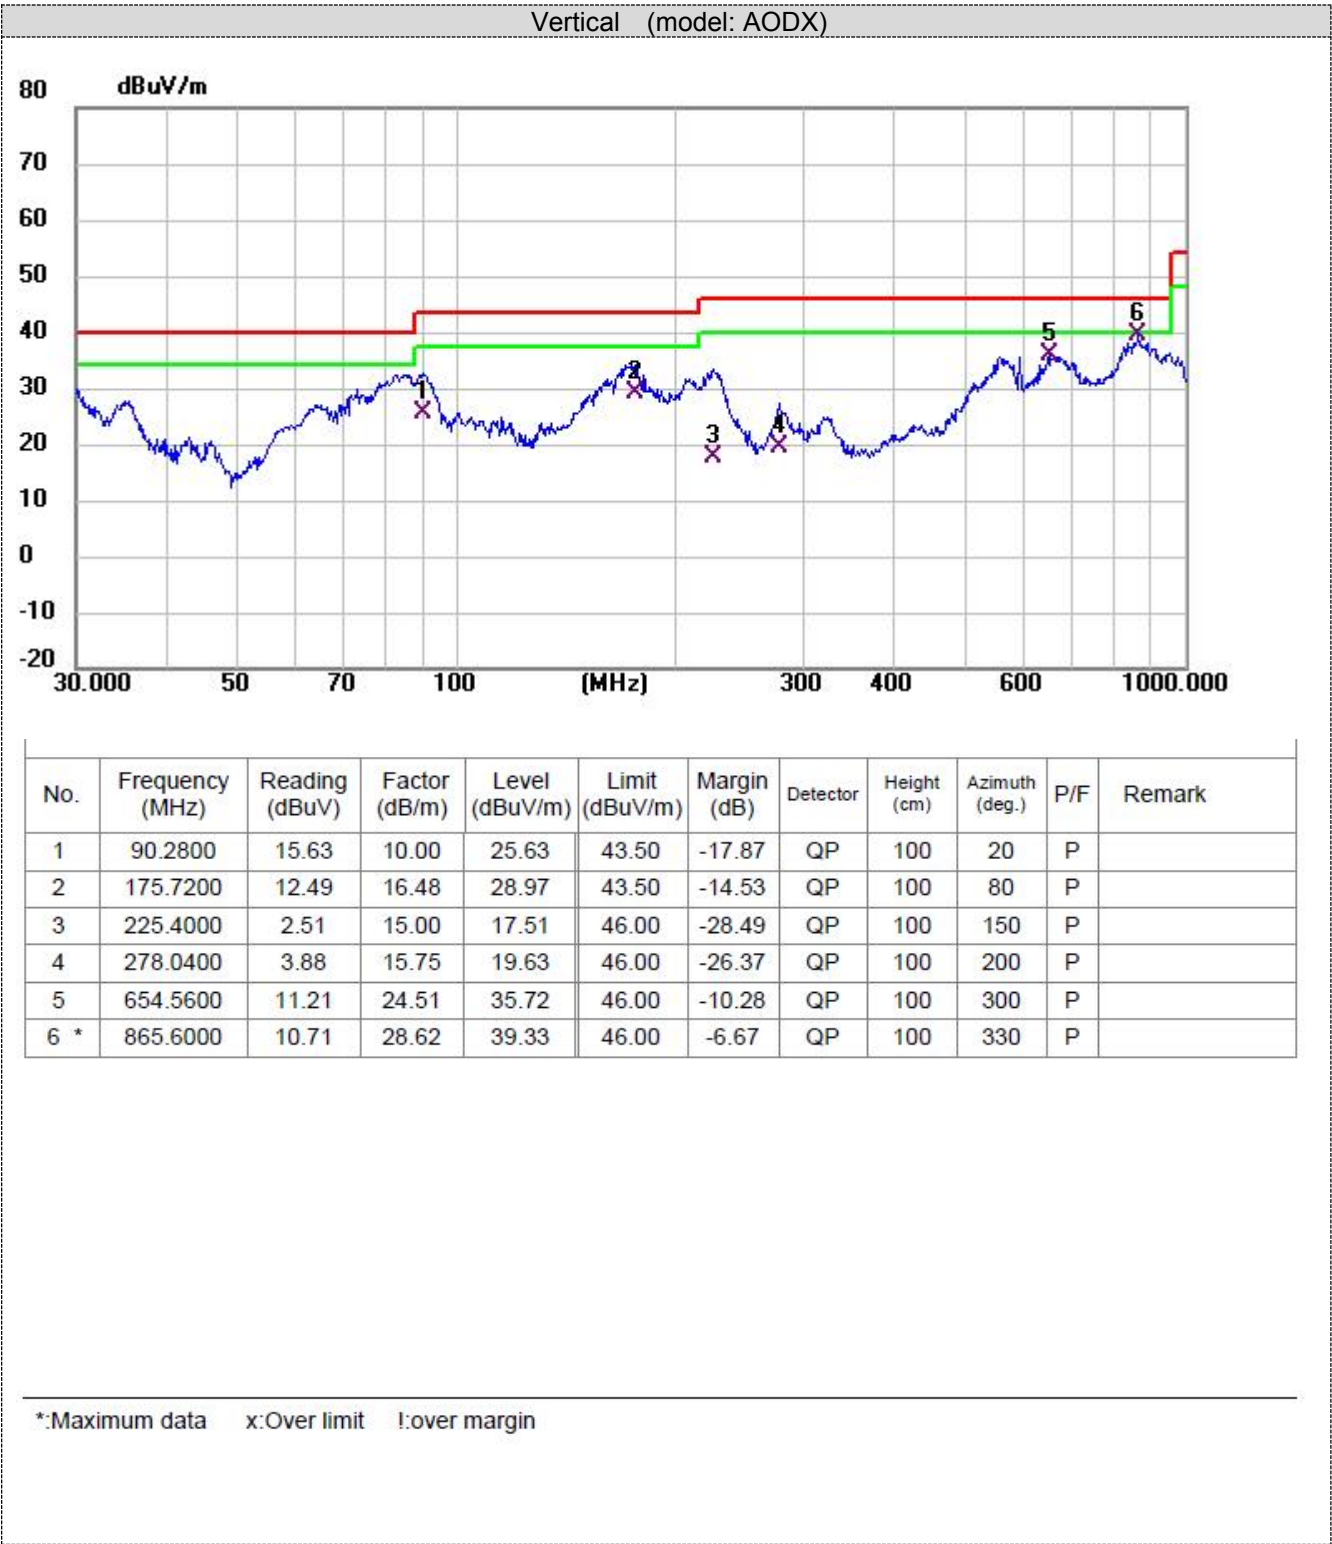

For 1GHz to 25GHz

Note: 802.11b/802.11g/802.11n (H20) /802.11n (H40)/802.11ax(H20) /802.11ax(H40) all have been tested, only worse case 802.11b mode is reported

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
802.11b-2412MHz									
V	4824	55.94	30.28	7.01	36.5	56.73	74	17.27	PK
V	4824	40.16	30.28	7.01	36.5	40.95	54	13.05	AV
H	4824	55.16	30.28	7.01	36.5	55.95	74	18.05	PK
H	4824	41.31	30.28	7.01	36.5	42.1	54	11.9	AV
V	7236	42.71	36.59	8.91	35.3	52.91	74	21.09	PK
V	7236	29.16	36.59	8.91	35.3	39.36	54	14.64	AV
H	7236	41.45	36.59	8.91	35.3	51.65	74	22.35	PK
H	7236	29.15	36.59	8.91	35.3	39.35	54	14.65	AV
802.11b -2437MHz									
V	4874	56.29	30.36	7.62	36.5	57.77	74	16.23	PK
V	4874	43.13	30.36	7.62	36.5	44.61	54	9.39	AV
H	4874	54.78	30.36	7.62	36.5	56.26	74	17.74	PK
H	4874	41.7	30.36	7.62	36.5	43.18	54	10.82	AV
V	7311	42.91	36.61	8.84	35.3	53.06	74	20.94	PK
V	7311	30.63	36.61	8.84	35.3	40.78	54	13.22	AV
H	7311	43.29	36.61	8.84	35.3	53.44	74	20.56	PK
H	7311	31.14	36.61	8.84	35.3	41.29	54	12.71	AV
802.11b -2462MHz									
V	4924	55.94	30.43	7.94	36.2	58.11	74	15.89	PK
V	4924	41.7	30.43	7.94	36.2	43.87	54	10.13	AV
H	4924	53.1	30.43	7.94	36.2	55.27	74	18.73	PK
H	4924	41.68	30.43	7.94	36.2	43.85	54	10.15	AV
V	7386	39.9	36.78	8.45	35.3	49.83	74	24.17	PK
V	7386	31.01	36.78	8.45	35.3	40.94	54	13.06	AV
H	7386	41.97	36.78	8.45	35.3	51.9	74	22.1	PK
H	7386	30.37	36.78	8.45	35.3	40.3	54	13.7	AV

Note:

- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) -- Mean the PK detector measured value is below average limit.
- 4) The other emission levels were very low against the limit.
- 5) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Results of Band Edges Test (Radiated)

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
802.11b -2412MHz									
V	2390	58	27.49	3.32	36.22	52.59	74	21.41	PK
V	2390	43.89	27.49	3.32	36.22	38.48	54	15.52	AV
H	2390	56.81	27.49	3.32	36.22	51.4	74	22.6	PK
H	2390	44.07	27.49	3.32	36.22	38.66	54	15.34	AV
V	2400	55.31	27.55	3.41	36.22	50.05	74	23.95	PK
V	2400	47.98	27.55	3.41	36.22	42.72	54	11.28	AV
H	2400	55.27	27.55	3.41	36.22	50.01	74	23.99	PK
H	2400	46.04	27.55	3.41	36.22	40.78	54	13.22	AV
802.11b -2462MHz									
V	2483.5	56.15	27.45	3.38	36.34	50.64	74	23.36	PK
V	2483.5	46.31	27.45	3.38	36.34	40.8	54	13.2	AV
H	2483.5	59.45	27.45	3.38	36.34	53.94	74	20.06	PK
H	2483.5	46.62	27.45	3.38	36.34	41.11	54	12.89	AV
V	2500	58.32	27.41	3.47	36.35	52.85	74	21.15	PK
V	2500	45.93	27.41	3.47	36.35	40.46	54	13.54	AV
H	2500	55.46	27.41	3.47	36.35	49.99	74	24.01	PK
H	2500	45.31	27.41	3.47	36.35	39.84	54	14.16	AV

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
802.11g -2412MHz									
V	2390	59.98	27.49	3.32	36.22	54.57	74	19.43	PK
V	2390	44.38	27.49	3.32	36.22	38.97	54	15.03	AV
H	2390	57.43	27.49	3.32	36.22	52.02	74	21.98	PK
H	2390	43.12	27.49	3.32	36.22	37.71	54	16.29	AV
V	2400	58.86	27.55	3.41	36.22	53.6	74	20.4	PK
V	2400	46.79	27.55	3.41	36.22	41.53	54	12.47	AV
H	2400	55.92	27.55	3.41	36.22	50.66	74	23.34	PK
H	2400	43.25	27.55	3.41	36.22	37.99	54	16.01	AV
802.11g -2462MHz									
V	2483.5	58.27	27.45	3.38	36.34	52.76	74	21.24	PK
V	2483.5	46.11	27.45	3.38	36.34	40.6	54	13.4	AV
H	2483.5	55.77	27.45	3.38	36.34	50.26	74	23.74	PK
H	2483.5	44.22	27.45	3.38	36.34	38.71	54	15.29	AV
V	2500	56.91	27.41	3.47	36.35	51.44	74	22.56	PK
V	2500	43.77	27.41	3.47	36.35	38.3	54	15.7	AV
H	2500	59.63	27.41	3.47	36.35	54.16	74	19.84	PK
H	2500	47.46	27.41	3.47	36.35	41.99	54	12.01	AV

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
802.11n(HT20) -2412MHz									
V	2390	57.06	27.49	3.32	36.22	51.65	74	22.35	PK
V	2390	47.94	27.49	3.32	36.22	42.53	54	11.47	AV
H	2390	59.04	27.49	3.32	36.22	53.63	74	20.37	PK
H	2390	46	27.49	3.32	36.22	40.59	54	13.41	AV
V	2400	56.61	27.55	3.41	36.22	51.35	74	22.65	PK
V	2400	46.7	27.55	3.41	36.22	41.44	54	12.56	AV
H	2400	58.74	27.55	3.41	36.22	53.48	74	20.52	PK
H	2400	45.32	27.55	3.41	36.22	40.06	54	13.94	AV
802.11n(HT20) -2462MHz									
V	2483.5	56.75	27.45	3.38	36.34	51.24	74	22.76	PK
V	2483.5	46.76	27.45	3.38	36.34	41.25	54	12.75	AV
H	2483.5	60	27.45	3.38	36.34	54.49	74	19.51	PK
H	2483.5	43.95	27.45	3.38	36.34	38.44	54	15.56	AV
V	2500	56.02	27.41	3.47	36.35	50.55	74	23.45	PK
V	2500	46.92	27.41	3.47	36.35	41.45	54	12.55	AV
H	2500	58.29	27.41	3.47	36.35	52.82	74	21.18	PK
H	2500	44.08	27.41	3.47	36.35	38.61	54	15.39	AV

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
802.11n(HT40) -2422MHz									
V	2390	55.64	27.49	3.32	36.22	50.23	74	23.77	PK
V	2390	43.56	27.49	3.32	36.22	38.15	54	15.85	AV
H	2390	57.24	27.49	3.32	36.22	51.83	74	22.17	PK
H	2390	44.74	27.49	3.32	36.22	39.33	54	14.67	AV
V	2400	56	27.55	3.41	36.22	50.74	74	23.26	PK
V	2400	44.4	27.55	3.41	36.22	39.14	54	14.86	AV
H	2400	57.82	27.55	3.41	36.22	52.56	74	21.44	PK
H	2400	46.18	27.55	3.41	36.22	40.92	54	13.08	AV
802.11n(HT40) -2452MHz									
V	2483.5	57.39	27.45	3.38	36.34	51.88	74	22.12	PK
V	2483.5	43.64	27.45	3.38	36.34	38.13	54	15.87	AV
H	2483.5	59.11	27.45	3.38	36.34	53.6	74	20.4	PK
H	2483.5	46.44	27.45	3.38	36.34	40.93	54	13.07	AV
V	2500	56.9	27.41	3.47	36.35	51.43	74	22.57	PK
V	2500	43.46	27.41	3.47	36.35	37.99	54	16.01	AV
H	2500	58.34	27.41	3.47	36.35	52.87	74	21.13	PK
H	2500	47.4	27.41	3.47	36.35	41.93	54	12.07	AV

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
802.11ax(HT20) -2412MHz									
V	2390	56.93	27.49	3.32	36.22	51.52	74	22.48	PK
V	2390	47.15	27.49	3.32	36.22	41.74	54	12.26	AV
H	2390	56.52	27.49	3.32	36.22	51.11	74	22.89	PK
H	2390	46.75	27.49	3.32	36.22	41.34	54	12.66	AV
V	2400	55.11	27.55	3.41	36.22	49.85	74	24.15	PK
V	2400	45.3	27.55	3.41	36.22	40.04	54	13.96	AV
H	2400	58.31	27.55	3.41	36.22	53.05	74	20.95	PK
H	2400	46.7	27.55	3.41	36.22	41.44	54	12.56	AV
802.11ax(HT20) -2462MHz									
V	2483.5	57.93	27.45	3.38	36.34	52.42	74	21.58	PK
V	2483.5	45.13	27.45	3.38	36.34	39.62	54	14.38	AV
H	2483.5	59.05	27.45	3.38	36.34	53.54	74	20.46	PK
H	2483.5	45.58	27.45	3.38	36.34	40.07	54	13.93	AV
V	2500	58.1	27.41	3.47	36.35	52.63	74	21.37	PK
V	2500	47.7	27.41	3.47	36.35	42.23	54	11.77	AV
H	2500	59.34	27.41	3.47	36.35	53.87	74	20.13	PK
H	2500	46.52	27.41	3.47	36.35	41.05	54	12.95	AV

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
802.11ax(HT40) -2422MHz									
V	2390	55.52	27.49	3.32	36.22	50.11	74	23.89	PK
V	2390	47.94	27.49	3.32	36.22	42.53	54	11.47	AV
H	2390	56.12	27.49	3.32	36.22	50.71	74	23.29	PK
H	2390	47.44	27.49	3.32	36.22	42.03	54	11.97	AV
V	2400	56.66	27.55	3.41	36.22	51.4	74	22.6	PK
V	2400	47.53	27.55	3.41	36.22	42.27	54	11.73	AV
H	2400	59.06	27.55	3.41	36.22	53.8	74	20.2	PK
H	2400	45.66	27.55	3.41	36.22	40.4	54	13.6	AV
802.11ax(HT40) -2452MHz									
V	2483.5	55.29	27.45	3.38	36.34	49.78	74	24.22	PK
V	2483.5	47.08	27.45	3.38	36.34	41.57	54	12.43	AV
H	2483.5	58.64	27.45	3.38	36.34	53.13	74	20.87	PK
H	2483.5	47.5	27.45	3.38	36.34	41.99	54	12.01	AV
V	2500	56.33	27.41	3.47	36.35	50.86	74	23.14	PK
V	2500	47.27	27.41	3.47	36.35	41.8	54	12.2	AV
H	2500	59.17	27.41	3.47	36.35	53.7	74	20.3	PK
H	2500	44.82	27.41	3.47	36.35	39.35	54	14.65	AV

Note:

- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) -- Mean the PK detector measured value is below average limit.
- 4) The other emission levels were very low against the limit.
- 5) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

5.3 Maximum Conducted Output Power


Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

See Appendix I

5.4 Power Spectral Density

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW ≥ 3 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

Test Configuration



Test Results

See Appendix VI

5.5 6dB Bandwidth


Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

Test Configuration



Test Results

See Appendix III

5.6 Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

Test Configuration



Test Results

See Appendix IV

5.7 Duty Cycle Information

See Appendix V

5.8 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.




Test Result:

The directional gains of antenna used for transmitting is 4.11dBi, and the antenna is and FPC Antenna and no consideration of replacement. Please see EUT photo for details.



Results: Compliance.

6 Test Setup Photos of the EUT

AOCX

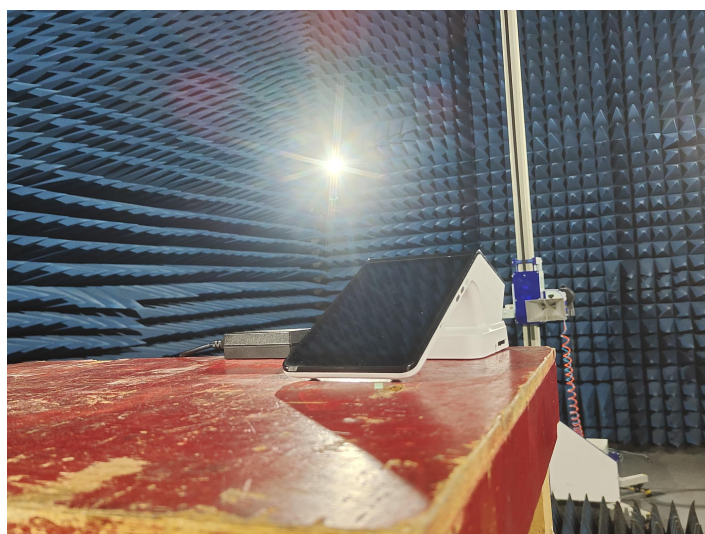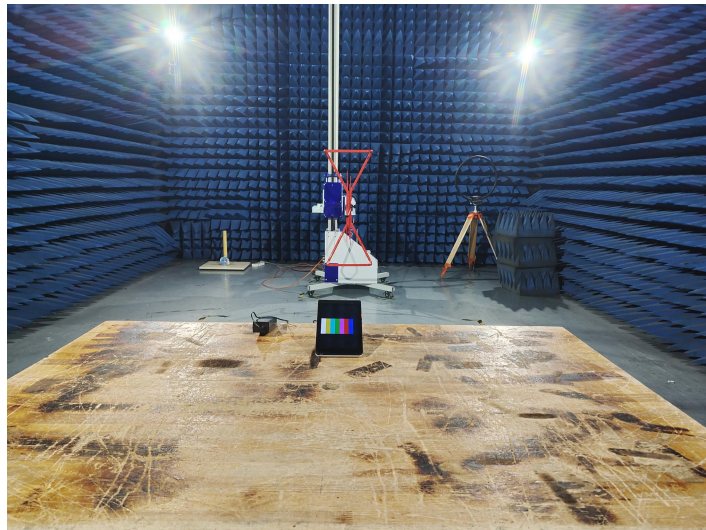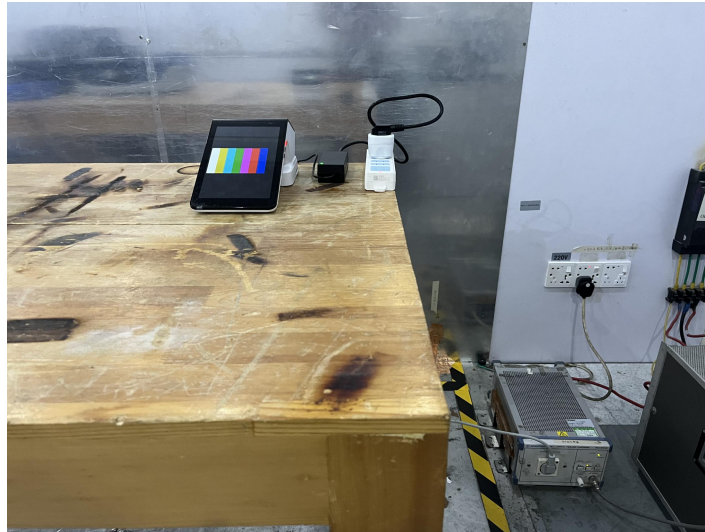

AODX

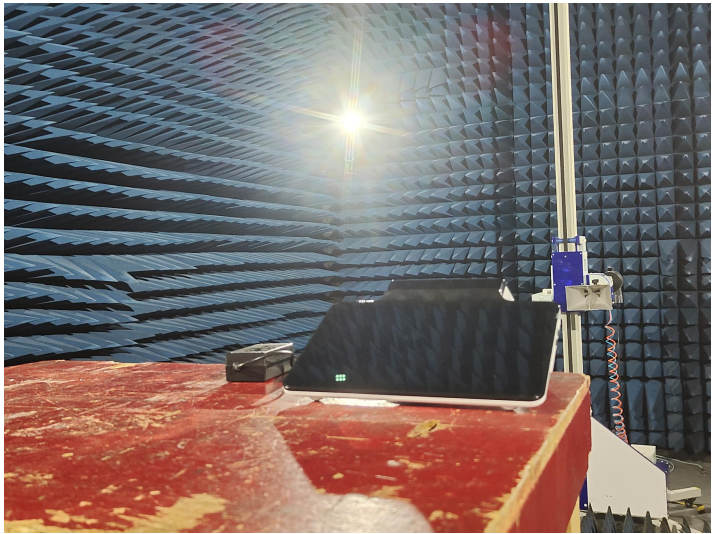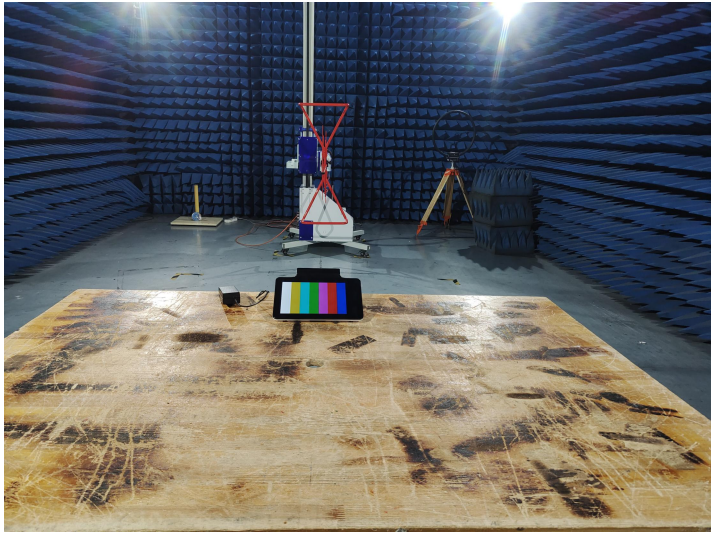

7 Photos of the EUT

See related photo report.

APPENDIX I. Conducted Output Power

Test Result


Conducted Output Power



Mode	Channel	RU & Index	Ant. 0 (dBm)	Ant. 1 (dBm)	Ant. 2 (dBm)	Ant. 3 (dBm)	Total (dBm)	Limit (dBm)	Result
IEEE 802.11b	1	N/A	16.93				16.93	≤30	PASS
	6		18.12				18.12	≤30	PASS
	11		18.87				18.87	≤30	PASS
IEEE 802.11g	1		15.77				15.77	≤30	PASS
	6		16.79				16.79	≤30	PASS
	11		17.46				17.46	≤30	PASS
IEEE 802.11n_20	1		14.50				14.5	≤30	PASS
	6		15.57				15.57	≤30	PASS
	11		16.18				16.18	≤30	PASS
IEEE 802.11n_40	3		15.80				15.8	≤30	PASS
	6		16.39				16.39	≤30	PASS
	9		16.81				16.81	≤30	PASS
IEEE 802.11ax_20	1	SU	17.38				17.38	≤30	PASS
	6		17.12				17.12	≤30	PASS
	11		17.74				17.74	≤30	PASS
IEEE 802.11ax_40	3		15.45				15.45	≤30	PASS
	6		16.22				16.22	≤30	PASS
	9		16.54				16.54	≤30	PASS

APPENDIX II. 99% Bandwidth Test Result

Mode	Channel	RU & Index	Ant.	Center Frequency (MHz)	99% BW (MHz)
IEEE 802.11b	1	N/A	0	2412	12.748
	6			2437	12.779
	11			2462	12.815
IEEE 802.11g	1			2412	16.481
	6			2437	16.476
	11			2462	16.487
IEEE 802.11n_20	1			2412	17.536
	6			2437	17.537
	11			2462	17.529
IEEE 802.11n_40	3			2422	32.917
	6			2437	32.898
	9			2452	32.810
IEEE 802.11ax_20	1	SU		2412	18.435
	6			2437	18.448
	11			2462	18.433
IEEE 802.11ax_40	3			2422	32.955
	6			2437	32.909
	9			2452	32.749



Test Graphs

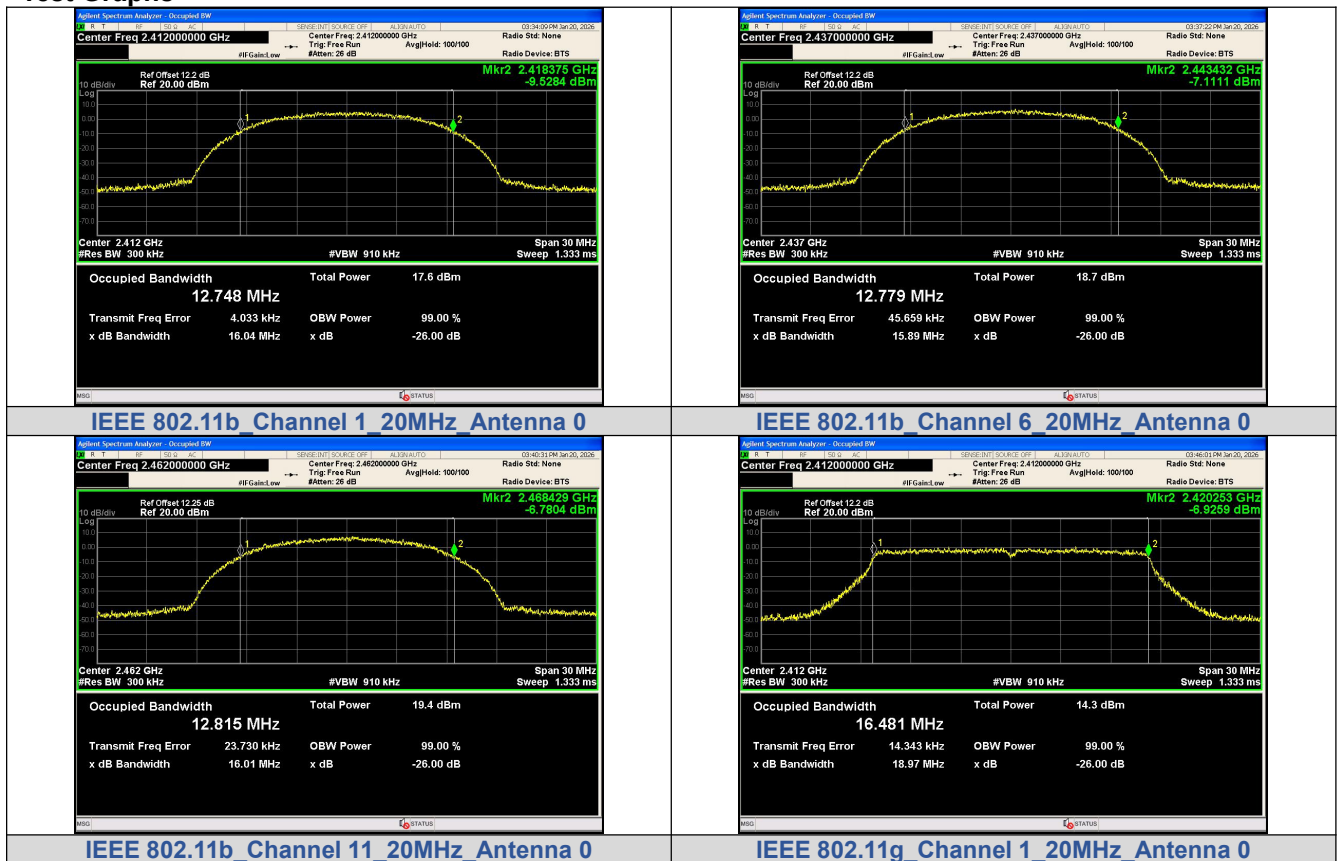

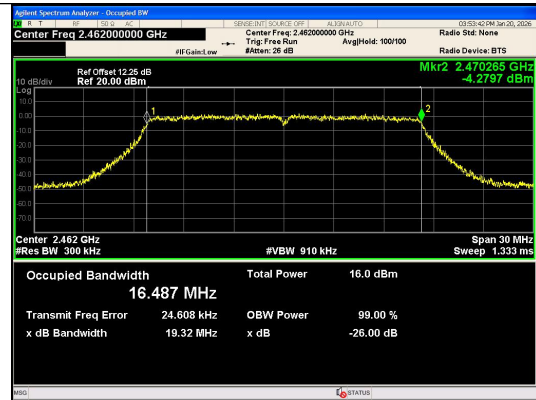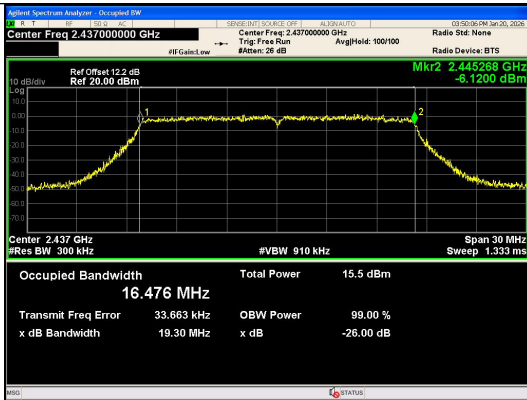



IEEE 802.11g Channel 6 20MHz Antenna 0

IEEE 802.11g Channel 11 20MHz Antenna 0

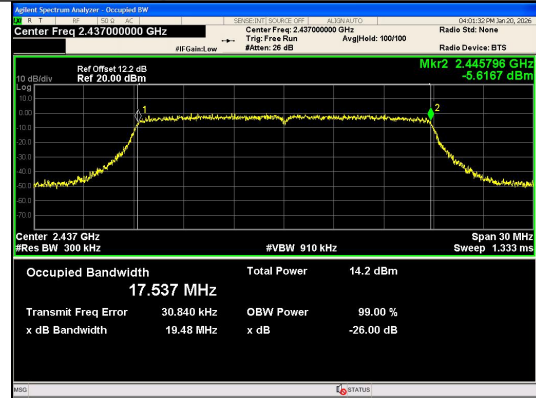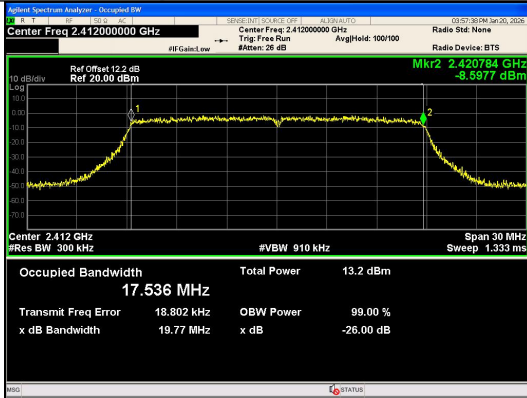



IEEE 802.11n Channel 1 20MHz Antenna 0

IEEE 802.11n Channel 6 20MHz Antenna 0

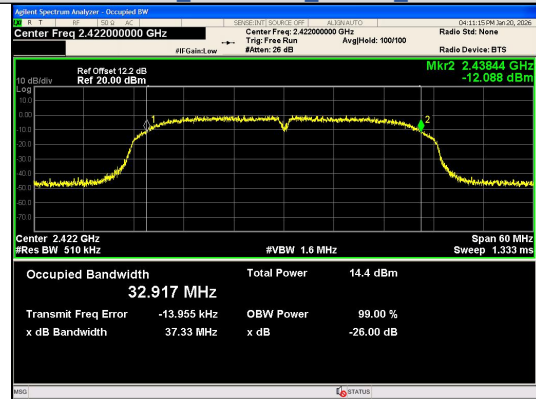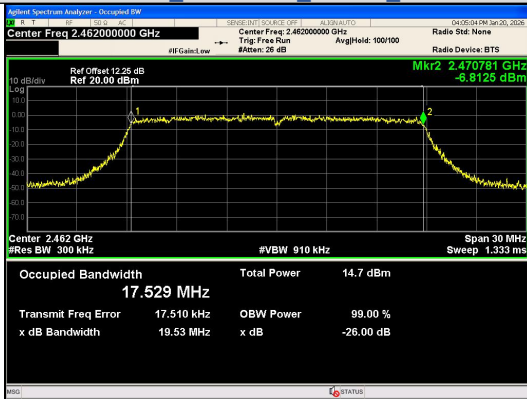

IEEE 802.11n Channel 11 20MHz Antenna 0

IEEE 802.11n Channel 3 40MHz Antenna 0

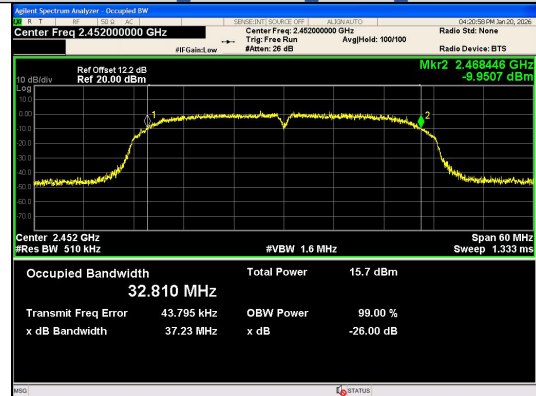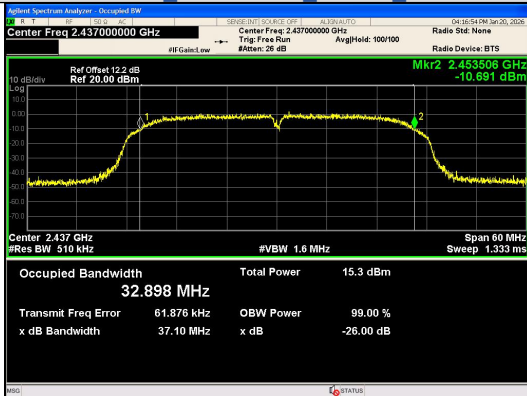

IEEE 802.11n Channel 6 40MHz Antenna 0

IEEE 802.11n Channel 9 40MHz Antenna 0