

TEST REPORT



TL-964



2/F., Garment Centre,
576 Castle Peak Road, Kowloon,
Hong Kong SAR, China.

Telephone: (852) 2173 8888
Facsimile: (852) 2785 5487
www.intertek.com

Report No.: 25020523HKG-002R1

Dyson Inc.

Application for Original Grant of 47 CFR Part 15 Certification

Desk Fan

This report contains the data of 5GHz WLAN (Wi-Fi) portion only.

FCC ID: QVHAM12001

This report supersedes previous report with report number 25020523HKG-002 dated March 27, 2025.

Prepared and Checked by:

Approved by:

Signed on File
Leung Chun Ning, Peter
Engineer

Hosea Chan
Assistant Supervisor
Date: February 13, 2026

TEST REPORT

TL-964

GENERAL INFORMATION

Grantee:	Dyson Inc.
Grantee Address:	1330 W Fulton St, 5th Floor, Chicago IL 60607, United States
FCC Specification Standard:	FCC Part 15, October 1, 2024 Edition
FCC ID:	QVHAM12001
FCC Model(s):	AM12
Type of EUT:	Unlicensed National Information Infrastructure Transmitter
Description of EUT:	Desk Fan
Brand Name:	dyson
Sample Receipt Date:	February 18, 2025
Date of Test:	February 18, 2025 to March 06, 2025
Report Date:	March 27, 2025
Environmental Conditions:	Temperature: +10 to 40°C Relative Humidity: 10 to 90%
Conclusion:	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 Certification.
Remark:	This report contains the data of 5GHz Wi-Fi portion only

AMENDMENT HISTORY

Report No.	Issue Date	Content
25020523HKG-002	March 27, 2025	Original Report
25020523HKG-002R1	February 13, 2026	Standard Update

TEST REPORT



TL-964



Dyson Inc.
Intertek Report No:
25020523HKG-002R1

SUMMARY OF TEST RESULT

Test Items	FCC Part 15 Section	Results
Antenna Requirement	15.407(a)	Complied
Max. Conducted Output Power (Peak)	15.407(a)	Complied
Transmit Power Control (TPC)	15.407(h)	Not Applicable
Min. 6dB RF Bandwidth	15.407(e)	Complied
26 dB emission bandwidth	15.407(a)	Complied
Occupied Bandwidth	N/A	Complied
Max. Power Density (Average)	15.407(a)	Complied
Out of Band Antenna Conducted Emission	15.407(b)	Not Applicable
Radiated Emission in Restricted Bands and Spurious Emissions	15.407(b), 15.209 & 15.109	Complied
AC Power Line Conducted Emission	15.207 & 15.107	Complied
Dynamic Frequency Selection (DFS)	15.407	Complied

Remark: Not Applicable (If the EUT is <500mW (27dBm))

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2024 Edition

TEST REPORT

TABLE OF CONTENTS

EXHIBIT 1	GENERAL DESCRIPTION	5
1.1	Product Description	5
1.2	Test Methodology	6
1.4	Test Facility.....	6
1.5	Related Submittal(s) Grants	6
EXHIBIT 2	SYSTEM TEST CONFIGURATION	7
2.1	Justification	7
2.2	EUT Exercising Software.....	8
2.3	Description of Accessories	8
2.4	Measurement Uncertainty.....	8
EXHIBIT 3	TEST RESULTS.....	9
3.1	Maximum Conducted (Peak) Output Power at Antenna Terminals.....	9
3.2	26dB Bandwidth and Occupied Bandwidth	12
3.3	Maximum Power Spectral Density.....	13
3.4	Field Strength Calculation	16
3.5	Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions	17
3.6	AC Power Line Conducted Emission	32
3.7	Frequency Stability Requirement	36
3.8	U-NII-1 99% Bandwidth Requirement	36
3.9	Dynamic Frequency Selection (DFS)	37
EXHIBIT 4	EQUIPMENT LIST	48

TEST REPORT

EXHIBIT 1 GENERAL DESCRIPTION

1.1 Product Description

The Equipment Under Test (EUT) is a 2.4GHz Wi-Fi, 5GHz Wi-Fi and 2.4GHz Bluetooth BLE (1Mbps) Transceiver for a Desk Fan.

For 5.15GHz to 5.25GHz Band:

The module operates at Frequency range of 5.18GHz to 5.24GHz.

For IEEE 802.11a mode, it operates at frequency range of 5.18GHz to 5.24GHz with 4 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK modulation. Maximum bit rate can be up to 54Mbps.

For IEEE 802.11n (with 20 MHz Bandwidth) mode, it operates at frequency range of 5.18GHz to 5.24GHz with 4 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK modulation. Maximum bit rate can support up to MCS7 65Mbps.

For 5.25GHz to 5.35GHz Band:

The module operates at Frequency range of 5.26GHz to 5.32GHz.

For IEEE 802.11a mode, it operates at frequency range of 5.26GHz to 5.32GHz with 4 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK modulation. Maximum bit rate can be up to 54Mbps.

For IEEE 802.11n (with 20 MHz Bandwidth) mode, it operates at frequency range of 5.26GHz to 5.32GHz with 4 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK modulation. Maximum bit rate can support up to MCS7 65Mbps.

For 5.47GHz to 5.725GHz Band:

The module operates at Frequency range of 5.5GHz to 5.7GHz.

For IEEE 802.11a mode, it operates at frequency range of 5.5GHz to 5.7GHz with 11 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK modulation. Maximum bit rate can be up to 54Mbps.

For IEEE 802.11n (with 20 MHz Bandwidth) mode, it operates at frequency range of 5.5GHz to 5.7GHz with 11 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK modulation. Maximum bit rate can support up to MCS7 65Mbps.

For 5.725GHz to 5.85GHz Band:

The module operates at Frequency range of 5.745GHz to 5.825GHz.

For IEEE 802.11a mode, it operates at frequency range of 5.745GHz to 5.825GHz with 5 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK modulation. Maximum bit rate can be up to 54Mbps.

For IEEE 802.11n (with 20 MHz Bandwidth) mode, it operates at frequency range of 5.745GHz to 5.825GHz with 5 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK modulation. Maximum bit rate can support up to MCS7 65Mbps.

TEST REPORT

TL-964

1.1 Product Description (Cont'd)

Antenna Information:

- PCB Antenna
- WLAN IEEE 802.11 a/b/g/n
- For operating frequency of 2.4GHz , antenna has maximum gain of 3.09 dBi
- For operating frequency of 5GHz , antenna has maximum gain of 4.41 dBi

The EUT is powered by 120VAC.

The antenna(s) used in the EUT is integral, and the test sample is a prototype.

The circuit description is saved with filename: descri.pdf.

1.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024. Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

Antenna port conducted measurements were performed according to ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 and KDB Publication No. 558074 D01 v05r02 (April 02, 2019) All other measurements were made in accordance with the procedures in 47 CFR Part 2 and RSS-Gen Issue 5 Amendment 2, February 2021.

1.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been fully placed on file with the FCC and Industry Canada No.: 2042H, CABID is "HKAP01".

1.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver (5G WiFi Portion only).

EXHIBIT 2 SYSTEM TEST CONFIGURATION

2.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by 120VAC during test.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209 / RSS-247 Section 2.5. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109 / RSS-247 Section 5.5 Limits.

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC power line-conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring

TEST REPORT

TL-964

instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

Different data rates have been tested. Worst case is reported only.

All relevant operation modes have been tested, and the worst case data is included in this report.

All data rates were tested under normal mode of WiFi. Only the worst-case data is shown in the report for OFDM.

For simultaneous transmission, both Wi-Fi and BLE portions are also switched on when taking radiated emission for determining worst-case spurious emission.

2.2 EUT Exercising Software

The EUT exercise program (AmebaD_mptool_4V0) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

2.3 Description of Accessories

Not Applicable.

2.4 Measurement Uncertainty


Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044.

EXHIBIT 3 TEST RESULTS

3.1 Maximum Conducted (RMS) Output Power at Antenna Terminals

RF Conduct Measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.



The antenna port of the EUT was connected to the input of a spectrum analyzer.

- ☒ The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals. The measurement procedure E.3.A (789033 D02 General UNII Test Procedures New Rules v02r01) was used.
- ☐ The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

For Maximum EIRP (Peak Antenna Gain = 4.41 dBi)

IEEE 802.11a (20MHz) (OFDM, 6 Mbps)

Frequency (MHz)	Conducted Output Power in dBm	Conducted Output Power in mWatt	EIRP in dBm	EIRP in mWatt
5180	14.847	30.53	19.257	84.28
5200	12.159	16.44	16.569	45.38
5240	14.372	27.37	18.782	75.54
5260	12.613	18.25	17.023	50.38
5300	13.144	20.63	17.554	56.94
5320	13.091	20.38	17.501	56.25
5500	14.510	28.25	18.920	77.98
5580	12.099	16.21	16.509	44.76
5700	11.940	15.63	16.350	43.15
5745	15.718	37.31	N/A	N/A
5785	14.175	26.15	N/A	N/A
5825	13.295	21.36	N/A	N/A

IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	Conducted Output Power in dBm	Conducted Output Power in mWatt	EIRP in dBm	EIRP in mWatt
5180	15.195	33.08	19.605	91.31
5200	11.822	15.21	16.232	42.00
5240	13.913	24.62	18.323	67.97
5260	12.536	17.93	16.946	49.50
5300	13.049	20.18	17.459	55.71
5320	12.886	19.44	17.296	53.65
5500	14.479	28.05	18.889	77.43
5580	12.078	16.14	16.488	44.55
5700	11.885	15.43	16.295	42.61
5745	15.883	38.75	N/A	N/A
5785	14.190	26.24	N/A	N/A
5825	13.320	21.48	N/A	N/A

Cable loss:

5180MHz	5200MHz	5240MHz	5260MHz	5300MHz	5320MHz	5500MHz	5580MHz	5700MHz
1.25	1.30	1.30	1.30	1.30	1.30	1.28	1.30	1.30
5745MHz	5785MHz	5825MHz						
1.36	1.36	1.36						

External Attenuation: 0dB

Cable loss, external attenuation:

- ☒ included in OFFSET function
☐ added to SA raw reading

IEEE 802.11a (20MHz) (OFDM, 6 Mbps)

Maximum Conducted (RMS) Output Level = 15.718dBm

IEEE 802.11n (20MHz) (OFDM, MCS0)

Maximum Conducted (RMS) Output Level = 15.883dBm

Remark:

1. Maximum e.i.r.p = Maximum Conducted Output Power + Duty Cycle Factor + Antenna Gain
2. Maximum Conducted Output Power = Conducted Output Power + Duty Cycle Factor
3. Duty Cycle = On Time/ Period
Duty Cycle Factor = $10 * \log (1/ \text{Duty cycle})$
Average factor = $20 \log 10 \text{ Duty Cycle}$.

Limits for FCC:

5150 - 5250MHz: 250mW (24dBm) for antennas with gains of 6dBi or less. (Client Device)

5250 - 5350MHz: 250mW (24dBm)

5470 - 5725MHz: 250mW (24dBm)


5725 - 5850MHz: 1W (30dBm) for antennas with gains of 6dBi or less.

TEST REPORT

TL-964

3.2 Minimum 6dB RF Bandwidth

The figure below shows the test setup, which is utilized to make these measurements.



The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11a (20MHz) (OFDM, 6 Mbps) (Refer to Test Data4.pdf)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5745	16.400 (P.41)	17.079 (P.42)
5785	16.350 (P.44)	16.929 (P.45)
5825	16.400 (P.47)	16.929 (P.48)

IEEE 802.11n (20MHz) (OFDM, MCS0) (Refer to Test Data5.pdf)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5745	17.150 (P.41)	18.277 (P.42)
5785	17.400 (P.44)	17.978 (P.45)
5825	17.400 (P.47)	17.978 (P.48)

Limits:


6dB bandwidth shall be at least 500kHz.

TEST REPORT

TL-964

3.3 26dB Bandwidth and Occupied Bandwidth

The figure below shows the test setup, which is utilized to make these measurements.

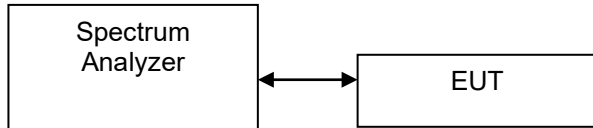

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 26dB lower than PEAK level. The 26dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11a (20MHz) (OFDM, 6 Mbps) (Refer to Test Data4.pdf)

Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
5180	22.172 (P.4)	16.929 (P.7)
5200	21.423 (P.8)	16.929 (P.11)
5240	21.423 (P.12)	16.929 (P.15)
5260	21.423 (P.16)	16.929 (P.19)
5300	25.019 (P.20)	17.079 (P.23)
5320	23.970 (P.24)	17.079 (P.27)
5500	22.172 (P.28)	16.929 (P.31)
5580	21.873 (P.32)	16.929 (P.35)
5700	21.423 (P.36)	16.929 (P.39)

IEEE 802.11n (20MHz) (OFDM, MCS0) (Refer to Test Data5.pdf)


Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
5180	22.622 (P.4)	17.978 (P.7)
5200	22.322 (P.8)	18.127 (P.11)
5240	22.472 (P.12)	17.978 (P.15)
5260	22.921 (P.16)	18.277 (P.19)
5300	27.715 (P.20)	18.277 (P.23)
5320	22.472 (P.24)	18.127 (P.27)
5500	22.322 (P.28)	17.978 (P.31)
5580	22.322 (P.32)	17.978 (P.35)
5700	22.622 (P.36)	17.828 (P.39)

Limits:

26dB bandwidth shall be at least 500kHz.

3.4 Maximum Power Spectral Density

The figure below shows the test setup, which is utilized to make these measurements.



The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer.

Spectrum analyser according to the following Settings:

For U-NII-1, U-NII-2A, U-NII-2C Band:

Using Method SA-2

- a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b) Set RBW = 1 MHz, Set VBW $\geq$ 3 RBW, Detector = RMS
- c) Sweep time = auto, trigger set to "free run".
- d) Trace average at least 100 traces in power averaging mode.
- e) Record the max value and add 10 log (1/duty cycle)

For U-NII-3 Band:

- a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b) Set RBW = 500 kHz, Set VBW $\geq$ 3 RBW, Detector = RMS
- c) Use the peak marker function to determine the maximum power level in any 500 kHz band segment within the fundamental EBW.
- d) Sweep time = auto, trigger set to "free run".
- e) Trace average at least 100 traces in power averaging mode.
- f) Record the max value and add 10 log (1/duty cycle)

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

TEST REPORT

TL-964

For Maximum EIRP (Peak Antenna Gain = 4.41 dBi)

IEEE 802.11a (20MHz) (OFDM, 6 Mbps) (Refer to Test Data4.pdf)

Frequency (MHz)	PSD in 1MHz (dBm)	EIRP PSD in 1MHz (dBm)	PSD in 500kHz (dBm)
5180 (P.5)	4.065	8.475	N/A
5200 (P.9)	2.321	6.731	N/A
5240 (P.13)	3.138	7.548	N/A
5260 (P.17)	2.203	6.613	N/A
5300 (P.21)	3.677	8.087	N/A
5320 (P.25)	4.294	8.704	N/A
5500 (P.29)	4.093	8.503	N/A
5580 (P.33)	3.075	7.485	N/A
5700 (P.37)	2.333	6.743	N/A
5745 (P.40)	N/A	N/A	3.596
5785 (P.43)	N/A	N/A	2.563
5825 (P.46)	N/A	N/A	1.330

IEEE 802.11n (20MHz) (OFDM, MCS0) (Refer to Test Data5.pdf)

Frequency (MHz)	PSD in 1MHz (dBm)	EIRP PSD in 1MHz (dBm)	PSD in 500kHz (dBm)
5180 (P.5)	4.378	8.788	N/A
5200 (P.9)	2.722	7.132	N/A
5240 (P.13)	4.662	9.072	N/A
5260 (P.17)	1.624	6.034	N/A
5300 (P.21)	2.729	7.139	N/A
5320 (P.25)	2.622	7.032	N/A
5500 (P.29)	3.925	8.335	N/A
5580 (P.33)	2.047	6.457	N/A
5700 (P.37)	1.819	6.229	N/A
5745 (P.40)	N/A	N/A	2.910
5785 (P.43)	N/A	N/A	2.366
5825 (P.46)	N/A	N/A	0.959

TEST REPORT

TL-964

Remark:

1. Cable Loss:

5180MHz	5200MHz	5240MHz	5260MHz	5300MHz	5320MHz	5500MHz	5580MHz	5700MHz
1.25	1.30	1.30	1.30	1.30	1.30	1.28	1.30	1.30
5745MHz	5785MHz	5825MHz						
1.36	1.36	1.36						

2. e.i.r.p = Power Spectral Density + Duty Cycle Factor + Antenna Gain
3. Power Spectral Density = Power Spectral Density + Duty Cycle Factor
4. Duty Cycle = On Time/ Period
 Duty Cycle Factor = $10 * \log (1/ \text{Duty Cycle})$
 Average factor = $20 \log 10 \text{ Duty Cycle.}$

Limits for FCC:

For U-NII-1: 11dBm/MHz for mobile/portable device
 For U-NII-2: 11dBm/MHz
 For U-NII-3 in 3kHz: 30dBm/500kHz

TEST REPORT

TL-964

3.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where	FS	=	Field Strength in dBμV/m
	RA	=	Receiver Amplitude (including preamplifier) in dBμV
	CF	=	Cable Attenuation Factor in dB
	AF	=	Antenna Factor in dB
	AG	=	Amplifier Gain in dB
	PD	=	Pulse Desensitization in dB
	AV	=	Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example:

Assume a receiver reading of 62.0 dBμV is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dBμV/m. This value in dBμV/m is converted to its corresponding level in μV/m.

$$\begin{aligned} RA &= 62.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB} \\ CF &= 1.6 \text{ dB} \\ AG &= 29.0 \text{ dB} \\ PD &= 0.0 \text{ dB} \\ AV &= -10.0 \text{ dB} \\ FS &= 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \text{ } \mu\text{V/m}$$

TEST REPORT

TL-964

3.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

3.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission at 5150 MHz.

The worst case radiated emission configuration photographs are saved with filename:
config photos.pdf


3.6.2 Radiated Emission Data

The data in below tables list the significant emission frequencies, the limit and the margin of compliance.


Judgement – Passed by 3.4 dB margin

3.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

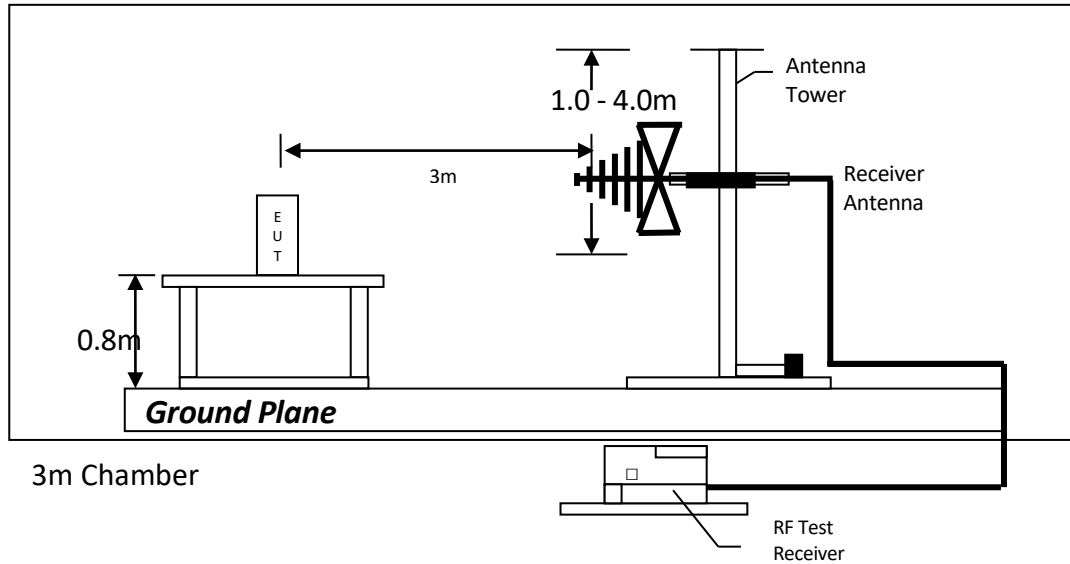

Test setup of radiated emissions up to 1GHz

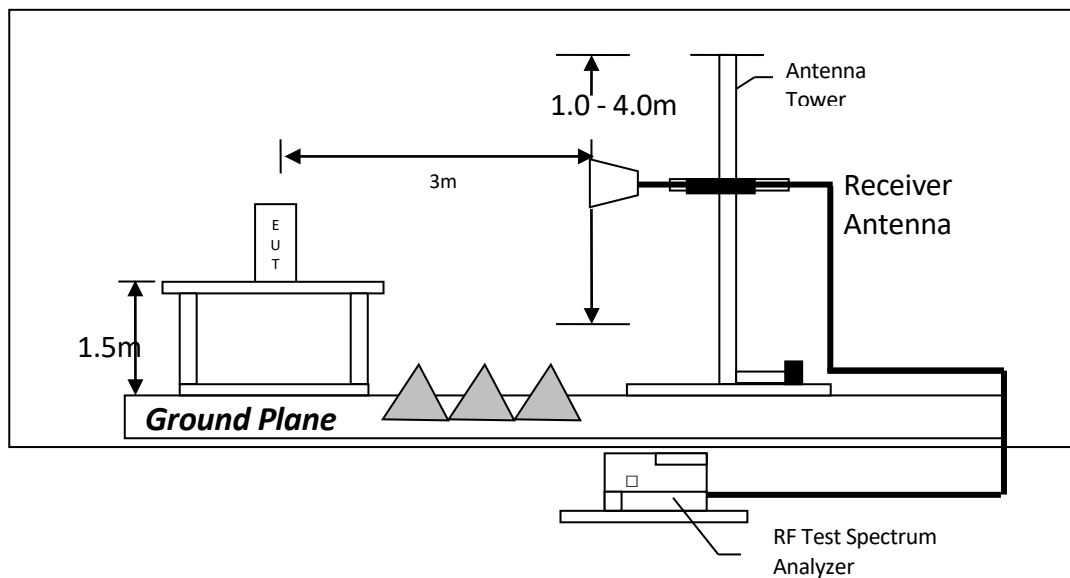

Test setup of radiated emissions above 1GHz

TEST REPORT

TL-964

RADIATED EMISSION DATA

IEEE 802.11a (20MHz) (OFDM,6MBs)

5180MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	5150.000	47.6	33	35.7	50.3	0	50.3	54.0	-3.7
H	10360.000	38.0	33	40.5	45.5	0	45.5	54.0	-8.5
V	15540.000	41.1	33	37.7	45.8	0	45.8	54.0	-8.2
H	20720.000	42.1	33	37.7	46.8	0	46.8	54.0	-7.2
V	25900.000	40.0	33	39.3	46.3	0	46.3	54.0	-7.7
V	31080.000	37.0	33	42.1	46.1	0	46.1	54.0	-7.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	5150.000	58.4	33	35.7	61.1	74.0	-12.9
H	10360.000	51.2	33	40.5	58.7	68.0	-9.3
V	15540.000	54.4	33	37.7	59.1	68.0	-8.9
H	20720.000	55.1	33	37.7	59.8	74.0	-14.2
V	25900.000	53.1	33	39.3	59.4	68.0	-8.6
V	31080.000	50.3	33	42.1	59.4	68.0	-8.6

5200MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	10400.000	41.8	33	40.5	49.3	0	49.3	54.0	-4.7
H	15600.000	41.7	33	37.7	46.4	0	46.4	54.0	-7.6
H	20800.000	42.8	33	37.7	47.5	0	47.5	54.0	-6.5
V	26000.000	43.4	33	39.2	49.6	0	49.6	54.0	-4.4
H	31200.000	38.2	33	42.1	47.3	0	47.3	54.0	-6.7

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	10400.000	55.3	33	40.5	62.8	68.0	-5.2
H	15600.000	55.2	33	37.7	59.9	74.0	-14.1
H	20800.000	55.4	33	37.7	60.1	74.0	-13.9
V	26000.000	56.2	33	39.2	62.4	68.0	-5.6
H	31200.000	52.4	33	42.1	61.5	74.0	-12.5

TEST REPORT

TL-964

RADIATED EMISSION DATA

IEEE 802.11a (20MHz) (OFDM,6MBs)

5240MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	10480.000	40.0	33	40.5	47.5	0	47.5	54.0	-6.5
V	15720.000	42.1	33	37.7	46.8	0	46.8	54.0	-7.2
V	20960.000	43.1	33	37.7	47.8	0	47.8	54.0	-6.2
H	26200.000	41.6	33	39.2	47.8	0	47.8	54.0	-6.2
H	31440.000	38.6	33	42.1	47.7	0	47.7	54.0	-6.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	10480.000	54.9	33	40.5	62.4	68.0	-5.6
V	15720.000	55.8	33	37.7	60.5	74.0	-13.5
V	20960.000	58.2	33	37.7	62.9	74.0	-11.1
H	26200.000	55.3	33	39.2	61.5	68.0	-6.5
H	31440.000	52.9	33	42.1	62.0	74.0	-12.0

5260MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	10520.000	36.2	33	40.4	43.6	0	43.6	54.0	-10.4
V	15780.000	42.9	33	37.7	47.6	0	47.6	54.0	-6.4
H	21040.000	43.0	33	37.9	47.9	0	47.9	54.0	-6.1
H	26300.000	38.5	33	39.2	44.7	0	44.7	54.0	-9.3
V	31560.000	40.2	33	40.4	47.6	0	47.6	54.0	-6.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	10520.000	50.5	33	40.4	57.9	68.0	-10.1
V	15780.000	56.7	33	37.7	61.4	74.0	-12.6
H	21040.000	53.7	33	37.9	58.6	74.0	-15.4
H	26300.000	53.2	33	39.2	59.4	68.0	-8.6
V	31560.000	52.9	33	40.4	60.3	74.0	-13.7

TEST REPORT

TL-964

RADIATED EMISSION DATA

IEEE 802.11a (20MHz) (OFDM,6MBs)

5300MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	10600.000	36.7	33	40.4	44.1	0	44.1	54.0	-9.9
H	15900.000	42.2	33	37.7	46.9	0	46.9	54.0	-7.1
H	21200.000	40.5	33	37.9	45.4	0	45.4	54.0	-8.6
V	26500.000	40.0	33	39.9	46.9	0	46.9	54.0	-7.1
H	31800.000	39.1	33	40.4	46.5	0	46.5	54.0	-7.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	10600.000	50.6	33	40.4	58.0	74.0	-16.0
H	15900.000	55.6	33	37.7	60.3	74.0	-13.7
H	21200.000	55.5	33	37.9	60.4	74.0	-13.6
V	26500.000	51.2	33	39.9	58.1	68.0	-9.9
H	31800.000	51.5	33	40.4	58.9	74.0	-15.1

5320MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	5350.000	47.3	33	35.7	50.0	0	50.0	54.0	-4.0
H	10640.000	35.8	33	40.4	43.2	0	43.2	54.0	-10.8
V	15960.000	42.4	33	37.7	47.1	0	47.1	54.0	-6.9
H	21280.000	40.4	33	37.9	45.3	0	45.3	54.0	-8.7
V	26600.000	39.8	33	39.9	46.7	0	46.7	54.0	-7.3
V	31920.000	39.8	33	40.4	47.2	0	47.2	54.0	-6.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	5350.000	57.9	33	35.7	60.6	74.0	-13.4
H	10640.000	49.1	33	40.4	56.5	74.0	-17.5
V	15960.000	55.7	33	37.7	60.4	74.0	-13.6
H	21280.000	52.1	33	37.9	57.0	74.0	-17.0
V	26600.000	53.9	33	39.9	60.8	68.0	-7.2
V	31920.000	53.3	33	40.4	60.7	68.0	-7.3

TEST REPORT

TL-964

RADIATED EMISSION DATA

IEEE 802.11a (20MHz) (OFDM,6MBs)

5500MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	5470.000	47.3	33	35.7	50.0	0	50.0	54.0	-4.0
H	11000.000	37.4	33	40.8	45.2	0	45.2	54.0	-8.8
V	16500.000	40.7	33	37.6	45.3	0	45.3	54.0	-8.7
V	22000.000	41.7	33	38.2	46.9	0	46.9	54.0	-7.1
V	27500.000	39.7	33	40.0	46.7	0	46.7	54.0	-7.3
H	33000.000	38.9	33	40.8	46.7	0	46.7	54.0	-7.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	5470.000	57.6	33	35.7	60.3	68.0	-7.7
H	11000.000	50.6	33	40.8	58.4	74.0	-15.6
V	16500.000	53.9	33	37.6	58.5	68.0	-9.5
V	22000.000	54.3	33	38.2	59.5	68.0	-8.5
V	27500.000	52.9	33	40.0	59.9	68.0	-8.1
H	33000.000	51.2	33	40.8	59.0	68.0	-9.0

5580MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	11160.000	37.4	33	40.8	45.2	0	45.2	54.0	-8.8
H	16740.000	41.4	33	37.6	46.0	0	46.0	54.0	-8.0
V	22320.000	41.0	33	38.2	46.2	0	46.2	54.0	-7.8
H	27900.000	39.7	33	40.0	46.7	0	46.7	54.0	-7.3
V	33480.000	38.4	33	40.8	46.2	0	46.2	54.0	-7.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	11160.000	50.8	33	40.8	58.6	74.0	-15.4
H	16740.000	54.9	33	37.6	59.5	68.0	-8.5
V	22320.000	53.9	33	38.2	59.1	74.0	-14.9
H	27900.000	52.4	33	40.0	59.4	68.0	-8.6
V	33480.000	52.0	33	40.8	59.8	68.0	-8.2

TEST REPORT

TL-964

RADIATED EMISSION DATA

IEEE 802.11a (20MHz) (OFDM,6MBs)

5700MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	11400.000	36.6	33	40.8	44.4	0	44.4	54.0	-9.6
V	17100.000	42.3	33	37.6	46.9	0	46.9	54.0	-7.1
H	22800.000	40.3	33	38.3	45.6	0	45.6	54.0	-8.4
V	28500.000	38.6	33	40.1	45.7	0	45.7	54.0	-8.3
V	34200.000	38.0	33	41.1	46.1	0	46.1	54.0	-7.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	11400.000	49.8	33	40.8	57.6	74.0	-16.4
V	17100.000	55.4	33	37.6	60.0	68.0	-8.0
H	22800.000	54.7	33	38.3	60.0	74.0	-14.0
V	28500.000	53.0	33	40.1	60.1	68.0	-7.9
V	34200.000	50.0	33	41.1	58.1	68.0	-9.9

5745MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	11490.000	37.4	33	40.8	45.2	0	45.2	54.0	-8.8
V	17235.000	42.1	33	37.6	46.7	0	46.7	54.0	-7.3
V	22980.000	41.5	33	38.3	46.8	0	46.8	54.0	-7.2
H	28725.000	39.5	33	40.1	46.6	0	46.6	54.0	-7.4
H	34470.000	38.5	33	41.1	46.6	0	46.6	54.0	-7.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	11490.000	50.8	33	40.8	58.6	74.0	-15.4
V	17235.000	55.6	33	37.6	60.2	68.0	-7.8
V	22980.000	54.8	33	38.3	60.1	74.0	-13.9
H	28725.000	52.4	33	40.1	59.5	68.0	-8.5
H	34470.000	51.5	33	41.1	59.6	68.0	-8.4

TEST REPORT

RADIATED EMISSION DATA

IEEE 802.11a (20MHz) (OFDM,6MBs)

5785MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	11570.000	38.6	33	40.5	46.1	0	46.1	54.0	-7.9
V	17355.000	43.9	33	37.6	48.5	0	48.5	54.0	-5.5
V	23140.000	41.7	33	38.6	47.3	0	47.3	54.0	-6.7
H	28925.000	41.4	33	40.1	48.5	0	48.5	54.0	-5.5
V	34710.000	40.0	33	41.3	48.3	0	48.3	54.0	-5.7

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	11570.000	51.6	33	40.5	59.1	74.0	-14.9
V	17355.000	57.5	33	37.6	62.1	68.0	-5.9
V	23140.000	57.3	33	38.6	62.9	68.0	-5.1
H	28925.000	54.6	33	40.1	61.7	68.0	-6.3
V	34710.000	54.4	33	41.3	62.7	68.0	-5.3

5825MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	11650.000	39.0	33	40.5	46.5	0	46.5	54.0	-7.5
V	17475.000	42.3	33	37.6	46.9	0	46.9	54.0	-7.1
H	23300.000	41.8	33	38.6	47.4	0	47.4	54.0	-6.6
V	29125.000	40.3	33	40.0	47.3	0	47.3	54.0	-6.7
H	34950.000	39.4	33	41.3	47.7	0	47.7	54.0	-6.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	11650.000	52.4	33	40.5	59.9	74.0	-14.1
V	17475.000	55.7	33	37.6	60.3	68.0	-7.7
H	23300.000	55.0	33	38.6	60.6	68.0	-7.4
V	29125.000	53.8	33	40.0	60.8	68.0	-7.2
H	34950.000	52.6	33	41.3	60.9	68.0	-7.1

- Notes:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.
 7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.
 9. Average detector is used according to ANSI C63.10 for average measurement.

TEST REPORT

TL-964

RADIATED EMISSION DATA

IEEE 802.11n (HT20MHz) (MCS0)

5180MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	5150.000	47.9	33	35.7	50.6	0	50.6	54.0	-3.4
V	10360.000	38.2	33	40.5	45.7	0	45.7	54.0	-8.3
H	15540.000	40.6	33	37.7	45.3	0	45.3	54.0	-8.7
V	20720.000	41.8	33	37.7	46.5	0	46.5	54.0	-7.5
H	25900.000	40.3	33	39.3	46.6	0	46.6	54.0	-7.4
V	31080.000	37.4	33	42.1	46.5	0	46.5	54.0	-7.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	5150.000	58.5	33	35.7	61.2	74.0	-12.8
V	10360.000	52.2	33	40.5	59.7	68.0	-8.3
H	15540.000	53.8	33	37.7	58.5	68.0	-9.5
V	20720.000	54.5	33	37.7	59.2	74.0	-14.8
H	25900.000	53.5	33	39.3	59.8	68.0	-8.2
V	31080.000	50.5	33	42.1	59.6	68.0	-8.4

5200MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	10400.000	40.2	33	40.5	47.7	0	47.7	54.0	-6.3
V	15600.000	41.8	33	37.7	46.5	0	46.5	54.0	-7.5
V	20800.000	43.0	33	37.7	47.7	0	47.7	54.0	-6.3
H	26000.000	40.9	33	39.2	47.1	0	47.1	54.0	-6.9
H	31200.000	38.8	33	42.1	47.9	0	47.9	54.0	-6.1

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	10400.000	54.0	33	40.5	61.5	68.0	-6.5
V	15600.000	55.2	33	37.7	59.9	74.0	-14.1
V	20800.000	55.5	33	37.7	60.2	74.0	-13.8
H	26000.000	55.4	33	39.2	61.6	68.0	-6.4
H	31200.000	52.3	33	42.1	61.4	74.0	-12.6

TEST REPORT

TL-964

RADIATED EMISSION DATA

IEEE 802.11n (HT20MHz) (MCS0)

5240MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	10480.000	41.2	33	40.5	48.7	0	48.7	54.0	-5.3
V	15720.000	42.3	33	37.7	47.0	0	47.0	54.0	-7.0
H	20960.000	43.4	33	37.7	48.1	0	48.1	54.0	-5.9
V	26200.000	41.8	33	39.2	48.0	0	48.0	54.0	-6.0
V	31440.000	37.9	33	42.1	47.0	0	47.0	54.0	-7.0

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	10480.000	54.7	33	40.5	62.2	68.0	-5.8
V	15720.000	55.4	33	37.7	60.1	74.0	-13.9
H	20960.000	57.1	33	37.7	61.8	74.0	-12.2
V	26200.000	56.7	33	39.2	62.9	68.0	-5.1
V	31440.000	53.7	33	42.1	62.8	74.0	-11.2

5260MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	10520.000	37.2	33	40.4	44.6	0	44.6	54.0	-9.4
V	15780.000	43.1	33	37.7	47.8	0	47.8	54.0	-6.2
H	21040.000	40.5	33	37.9	45.4	0	45.4	54.0	-8.6
H	26300.000	40.4	33	39.2	46.6	0	46.6	54.0	-7.4
V	31560.000	39.9	33	40.4	47.3	0	47.3	54.0	-6.7

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	10520.000	51.4	33	40.4	58.8	68.0	-9.2
V	15780.000	56.5	33	37.7	61.2	74.0	-12.8
H	21040.000	55.0	33	37.9	59.9	74.0	-14.1
H	26300.000	53.6	33	39.2	59.8	68.0	-8.2
V	31560.000	52.9	33	40.4	60.3	74.0	-13.7

TEST REPORT

TL-964

RADIATED EMISSION DATA

IEEE 802.11n (HT20MHz) (MCS0)

5300MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	10600.000	35.0	33	40.4	42.4	0	42.4	54.0	-11.6
V	15900.000	42.4	33	37.7	47.1	0	47.1	54.0	-6.9
H	21200.000	42.9	33	37.9	47.8	0	47.8	54.0	-6.2
V	26500.000	39.5	33	39.9	46.4	0	46.4	54.0	-7.6
H	31800.000	38.2	33	40.4	45.6	0	45.6	54.0	-8.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	10600.000	48.6	33	40.4	56.0	74.0	-18.0
V	15900.000	55.7	33	37.7	60.4	74.0	-13.6
H	21200.000	52.3	33	37.9	57.2	74.0	-16.8
V	26500.000	53.3	33	39.9	60.2	68.0	-7.8
H	31800.000	49.6	33	40.4	57.0	74.0	-17.0

5320MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	5350.000	47.3	33	35.7	50.0	0	50.0	54.0	-4.0
V	10640.000	34.7	33	40.4	42.1	0	42.1	54.0	-11.9
H	15960.000	42.4	33	37.7	47.1	0	47.1	54.0	-6.9
V	21280.000	42.7	33	37.9	47.6	0	47.6	54.0	-6.4
H	26600.000	38.3	33	39.9	45.2	0	45.2	54.0	-8.8
H	31920.000	37.3	33	40.4	44.7	0	44.7	54.0	-9.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	5350.000	57.9	33	35.7	60.6	74.0	-13.4
V	10640.000	48.1	33	40.4	55.5	74.0	-18.5
H	15960.000	55.4	33	37.7	60.1	74.0	-13.9
V	21280.000	53.6	33	37.9	58.5	74.0	-15.5
H	26600.000	49.6	33	39.9	56.5	68.0	-11.5
H	31920.000	51.0	33	40.4	58.4	68.0	-9.6

TEST REPORT

TL-964

RADIATED EMISSION DATA

IEEE 802.11n (HT20MHz) (MCS0)

5500MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	5470.000	47.4	33	35.7	50.1	0	50.1	54.0	-3.9
V	11000.000	37.4	33	40.8	45.2	0	45.2	54.0	-8.8
H	16500.000	40.7	33	37.6	45.3	0	45.3	54.0	-8.7
H	22000.000	41.7	33	38.2	46.9	0	46.9	54.0	-7.1
V	27500.000	39.2	33	40.0	46.2	0	46.2	54.0	-7.8
V	33000.000	38.3	33	40.8	46.1	0	46.1	54.0	-7.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	5470.000	57.5	33	35.7	60.2	68.0	-7.8
V	11000.000	52.1	33	40.8	59.9	74.0	-14.1
H	16500.000	54.2	33	37.6	58.8	68.0	-9.2
H	22000.000	54.1	33	38.2	59.3	68.0	-8.7
V	27500.000	52.5	33	40.0	59.5	68.0	-8.5
V	33000.000	51.2	33	40.8	59.0	68.0	-9.0

5580MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	11160.000	36.8	33	40.8	44.6	0	44.6	54.0	-9.4
H	16740.000	41.5	33	37.6	46.1	0	46.1	54.0	-7.9
H	22320.000	40.4	33	38.2	45.6	0	45.6	54.0	-8.4
H	27900.000	39.5	33	40.0	46.5	0	46.5	54.0	-7.5
V	33480.000	37.2	33	40.8	45.0	0	45.0	54.0	-9.0

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	11160.000	50.4	33	40.8	58.2	74.0	-15.8
H	16740.000	56.6	33	37.6	61.2	68.0	-6.8
H	22320.000	54.4	33	38.2	59.6	74.0	-14.4
H	27900.000	54.2	33	40.0	61.2	68.0	-6.8
V	33480.000	53.3	33	40.8	61.1	68.0	-6.9

TEST REPORT

RADIATED EMISSION DATA

IEEE 802.11n (HT20MHz) (MCS0)

5700MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	11400.000	36.6	33	40.8	44.4	0	44.4	54.0	-9.6
V	17100.000	42.3	33	37.6	46.9	0	46.9	54.0	-7.1
V	22800.000	40.2	33	38.3	45.5	0	45.5	54.0	-8.5
H	28500.000	39.7	33	40.1	46.8	0	46.8	54.0	-7.2
H	34200.000	38.5	33	41.1	46.6	0	46.6	54.0	-7.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	11400.000	49.9	33	40.8	57.7	74.0	-16.3
V	17100.000	55.9	33	37.6	60.5	68.0	-7.5
V	22800.000	53.3	33	38.3	58.6	74.0	-15.4
H	28500.000	51.7	33	40.1	58.8	68.0	-9.2
H	34200.000	50.8	33	41.1	58.9	68.0	-9.1

5745MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	11490.000	37.6	33	40.8	45.4	0	45.4	54.0	-8.6
V	17235.000	41.8	33	37.6	46.4	0	46.4	54.0	-7.6
H	22980.000	41.1	33	38.3	46.4	0	46.4	54.0	-7.6
H	28725.000	39.6	33	40.1	46.7	0	46.7	54.0	-7.3
V	34470.000	38.0	33	41.1	46.1	0	46.1	54.0	-7.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	11490.000	50.9	33	40.8	58.7	74.0	-15.3
V	17235.000	54.9	33	37.6	59.5	68.0	-8.5
H	22980.000	53.9	33	38.3	59.2	74.0	-14.8
H	28725.000	52.3	33	40.1	59.4	68.0	-8.6
V	34470.000	51.5	33	41.1	59.6	68.0	-8.4

TEST REPORT

TL-964

RADIATED EMISSION DATA

IEEE 802.11n (HT20MHz) (MCS0)

5785MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	11570.000	38.3	33	40.5	45.8	0	45.8	54.0	-8.2
H	17355.000	43.9	33	37.6	48.5	0	48.5	54.0	-5.5
H	23140.000	41.3	33	38.6	46.9	0	46.9	54.0	-7.1
V	28925.000	40.9	33	40.1	48.0	0	48.0	54.0	-6.0
H	34710.000	39.2	33	41.3	47.5	0	47.5	54.0	-6.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	11570.000	51.7	33	40.5	59.2	74.0	-14.8
H	17355.000	57.3	33	37.6	61.9	68.0	-6.1
H	23140.000	55.6	33	38.6	61.2	68.0	-6.8
V	28925.000	53.2	33	40.1	60.3	68.0	-7.7
H	34710.000	51.8	33	41.3	60.1	68.0	-7.9

5825MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	11650.000	39.0	33	40.5	46.5	0	46.5	54.0	-7.5
H	17475.000	42.4	33	37.6	47.0	0	47.0	54.0	-7.0
V	23300.000	42.3	33	38.6	47.9	0	47.9	54.0	-6.1
V	29125.000	40.0	33	40.0	47.0	0	47.0	54.0	-7.0
H	34950.000	39.4	33	41.3	47.7	0	47.7	54.0	-6.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	11650.000	52.6	33	40.5	60.1	74.0	-13.9
H	17475.000	55.7	33	37.6	60.3	68.0	-7.7
V	23300.000	55.7	33	38.6	61.3	68.0	-6.7
V	29125.000	54.5	33	40.0	61.5	68.0	-6.5
H	34950.000	52.8	33	41.3	61.1	68.0	-6.9

- Notes:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.
 7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.
 9. Average detector is used according to ANSI C63.10 for average measurement.

TEST REPORT

TL-964

RADIATED EMISSION DATA

Mode: 5GHz Wi-Fi and BLE Operating

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
H	337.490	18.9	16	24.0	26.9	46.0	-19.1
H	362.468	15.4	16	24.0	23.4	46.0	-22.6
V	437.521	18.6	16	26.0	28.6	46.0	-17.4
H	512.454	17.2	16	27.0	28.2	46.0	-17.8
V	587.508	16.8	16	29.0	29.8	46.0	-16.2
H	937.556	12.9	16	33.0	29.9	46.0	-16.1

- Notes:
1. Quasi-Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 5. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

TL-964

3.7 AC Power Line Conducted Emission

- ☐ Not Applicable – EUT is only powered by battery for operation.
- ☒ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

3.7.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration at 1.266 MHz.


The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: Setup Photos.pdf.

3.7.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 8.65 dB margin.

3.7.3 Conducted Emission Test Setup

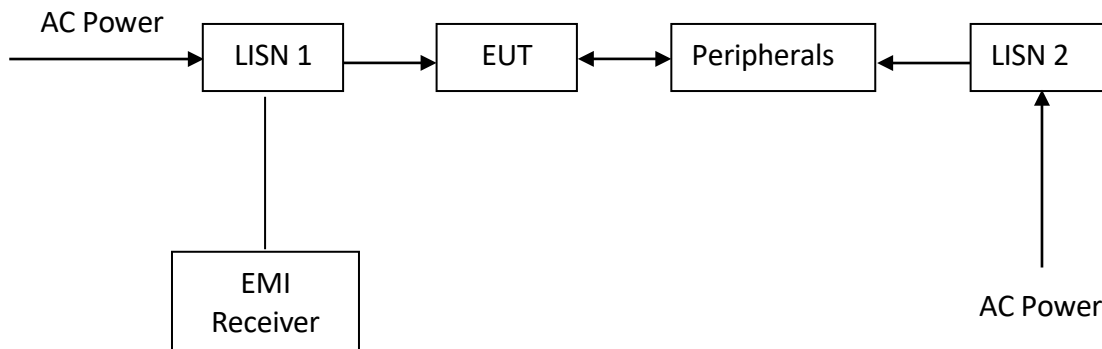


The EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

AC POWER LINE CONDUCTED EMISSION

Worst Case Operating Mode: 5GHz Wi-Fi and BLE Operating

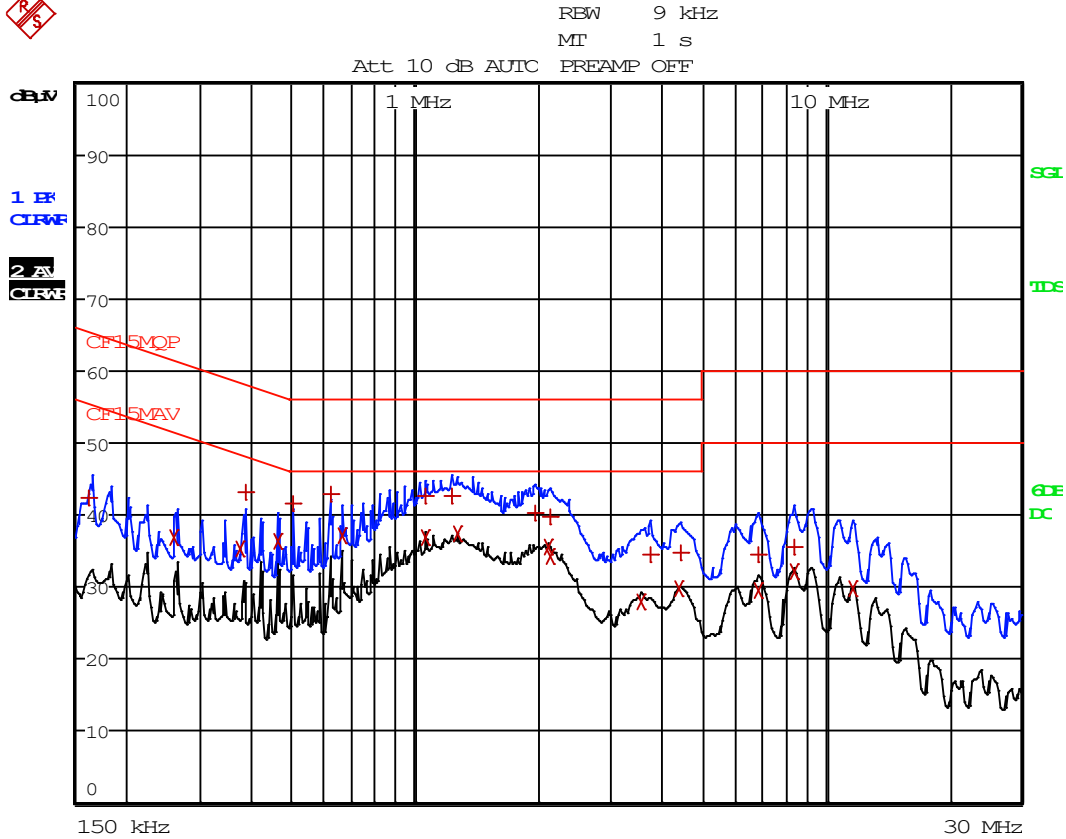

TEST REPORT

TL-964

AC POWER LINE CONDUCTED EMISSION

Worst Case Operating Mode: 5GHz Wi-Fi and BLE Operating

EDIT PEAK LIST (Final Measurement Results)

Trace1: CF15MQP

Trace2: CF15MAV

Trace3: ---

	TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
1	Quasi Peak	163.5 kHz	42.46 L1	-22.81
2	CISPR Average	262.5 kHz	36.78 L1	-14.57
2	CISPR Average	379.5 kHz	35.37 N	-12.91
1	Quasi Peak	384 kHz	43.10 N	-15.09
2	CISPR Average	460.5 kHz	36.35 L1	-10.32
1	Quasi Peak	501 kHz	41.66 L1	-14.33
1	Quasi Peak	622.5 kHz	42.96 L1	-13.03
2	CISPR Average	663 kHz	37.13 N	-8.86
1	Quasi Peak	1.0635 MHz	42.67 L1	-13.32
2	CISPR Average	1.0635 MHz	36.75 L1	-9.24
1	Quasi Peak	1.2255 MHz	42.55 L1	-13.44
2	CISPR Average	1.266 MHz	37.34 L1	-8.65
1	Quasi Peak	1.968 MHz	40.30 N	-15.69
2	CISPR Average	2.1075 MHz	35.44 L1	-10.56
1	Quasi Peak	2.13 MHz	39.78 L1	-16.21
2	CISPR Average	2.148 MHz	34.35 L1	-11.64
2	CISPR Average	3.5745 MHz	28.04 N	-17.95
1	Quasi Peak	3.7365 MHz	34.59 N	-21.40
2	CISPR Average	4.4205 MHz	29.84 L1	-16.15
1	Quasi Peak	4.461 MHz	34.65 L1	-21.34

TEST REPORT



TL-964

Dyson Inc.
Intertek Report No:
25020523HKG-002R1

AC POWER LINE CONDUCTED EMISSION

Worst Case Operating Mode: 5GHz Wi-Fi and BLE Operating

EDIT PEAK LIST (Final Measurement Results)

Trace1: CF15MQP

Trace2: CF15MAV

Trace3: ---

	TRACE	FREQUENCY	LEVEL dB μ V	DELTA LIMIT dB
1	Quasi Peak	6.864 MHz	34.64 N	-25.35
2	CISPR Average	6.909 MHz	29.41 L1	-20.58
1	Quasi Peak	8.403 MHz	35.59 N	-24.40
2	CISPR Average	8.4075 MHz	32.04 L1	-17.95
2	CISPR Average	11.688 MHz	29.69 L1	-20.30

TEST REPORT

TL-964

3.8 Frequency Stability Requirement

Frequency (MHz)	Mode	Measured Value (ppm) (0°C)	Measured Value (ppm) (10°C)	Measured Value (ppm) (20°C)	Measured Value (ppm) (30°C)	Measured Value (ppm) (40°C)	Measured Value (ppm) (50°C)
5180	A	0.827	0.963	4.062	4.126	3.910	3.706
5260		0.803	0.867	4.056	4.207	3.763	3.657
5500		0.764	0.841	4.043	4.271	3.636	3.672
5745		0.734	0.852	4.098	4.879	3.850	4.145

Temperature (°C)	Frequency (MHz)	Mode	Measured Value (ppm) 120VAC	Measured Value (ppm) 138VAC	Measured Value (ppm) 102VAC
25	5180	A	4.101	4.785	3.907
25	5260		3.955	4.585	3.552
25	5500		3.908	4.871	3.555
25	5745		4.115	3.573	4.501

The Maximum value is +4.879 ppm.

It is proved that the frequency stability such that an emission is maintained within the band of operation under all condition.

3.9 U-NII-1 99% Bandwidth Requirement

For the case if a channel operating in U-NII-1 band has a 26-dB bandwidth that straddles into U-NII-2A band but its 99% occupied power bandwidth does not. For this rare case, DFS requirement does not apply.

The plots of U-NII-1 99% bandwidth is saved with filename:
Test Data4.pdf and Test Data5.pdf proved that no further test for DFS.

TEST REPORT

3.10 Dynamic Frequency Selection (DFS)

According to standard 905462 DO2 UNII DFS Compliance Procedures New Rules v02 Section 5.1.1 and 5.1.2.

3.10.1 Master Devices

- a) The Master Device will use DFS in order to detect Radar Waveforms with received signal strength above the DFS Detection Threshold in the 5250 - 5350 MHz and 5470- 5725 MHz bands. DFS is not required in the 5150 - 5250 MHz or 5725 - 5825 MHz bands.
- b) Before initiating a network on a Channel, the Master Device will perform a Channel Availability Check for a specified time duration (Channel Availability Check Time) to ensure that there is no radar system operating on the Channel, using DFS described under subsection a) above.
- c) The Master Device initiates a U-NII network by transmitting control signals that will enable other U-NII devices to Associate with the Master Device.
- d) During normal operation, the Master Device will monitor the Channel (In-Service Monitoring) to ensure that there is no radar system operating on the Channel, using DFS described under a).
- e) If the Master Device has detected a Radar Waveform during In-Service Monitoring as described under d), the Operating Channel of the U-NII network is no longer an Available Channel. The Master Device will instruct all associated Client Device(s) to stop transmitting on this Channel within the Channel Move Time. The transmissions during the Channel Move Time will be limited to the Channel Closing Transmission Time.
- f) Once the Master Device has detected a Radar Waveform it will not utilize the Channel for the duration of the Non-Occupancy Period.
- g) If the Master Device delegates the In-Service Monitoring to a Client Device, then the combination will be tested to the requirements described under d) through f) above.

3.10.2 Client Devices

- a) A Client Device will not transmit before having received appropriate control signals from a Master Device.
- b) A Client Device will stop all its transmissions whenever instructed by a Master Device to which it is associated and will meet the Channel Move Time and Channel Closing Transmission Time requirements. The Client Device will not resume any transmissions until it has again received control signals from a Master Device.
- c) If a Client Device is performing In-Service Monitoring and detects a Radar Waveform above the DFS Detection Threshold, it will inform the Master Device. This is equivalent to the Master Device detecting the Radar Waveform and d) through f) of section 5.1.1 apply.
- d) Irrespective of Client Device or Master Device detection the Channel Move Time and Channel Closing Transmission Time requirements remain the same.
- e) The client test frequency must be monitored to ensure no transmission of any type has occurred for 30 minutes. Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear.

TEST REPORT

TL-964

Applicability of DFS Requirement During Normal Operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>DFS Detection Threshold</i>	Yes	Not required
<i>Channel Closing Transmission Time</i>	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>U-NII Detection Bandwidth and Statistical Performance Check</i>	All BW modes must be tested	Not required
<i>Channel Move Time and Channel Closing Transmission Time</i>	Test using widest BW mode available	Test using the widest BW mode available for the link
<i>All other tests</i>	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

The operational behavior and individual DFS requirements that are associated with these modes are as follows:

TEST REPORT

TL-964

Response Requirements

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
Note 1: <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel move</i> (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

TEST REPORT

TL-964

3.11 Short Pulse Radar Test Waveforms


Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

3.12 Calibration Setup and DFS Test Results

3.12.1 Calibration Procedure of Radar Waveform:


The Interference Radar Detection Threshold Level is $-62\text{dBm} + 0\text{dBi} + 1\text{ dB} = -61\text{dBm}$ that had been taken into account the output power range and antenna gain. The following equipment setup was used to calibrate the conducted Radar Waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the Master or client device. The Spectrum analyzer was switched was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 1MHz or 3MHz respectively to measure the type 0 radar waveform. The spectrum analyzer had offset to compensate and RF cable loss. The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was - 61dBm. Capture the spectrum analyzer plots on short pulse radar waveform.

3.12.2 Conducted Setup

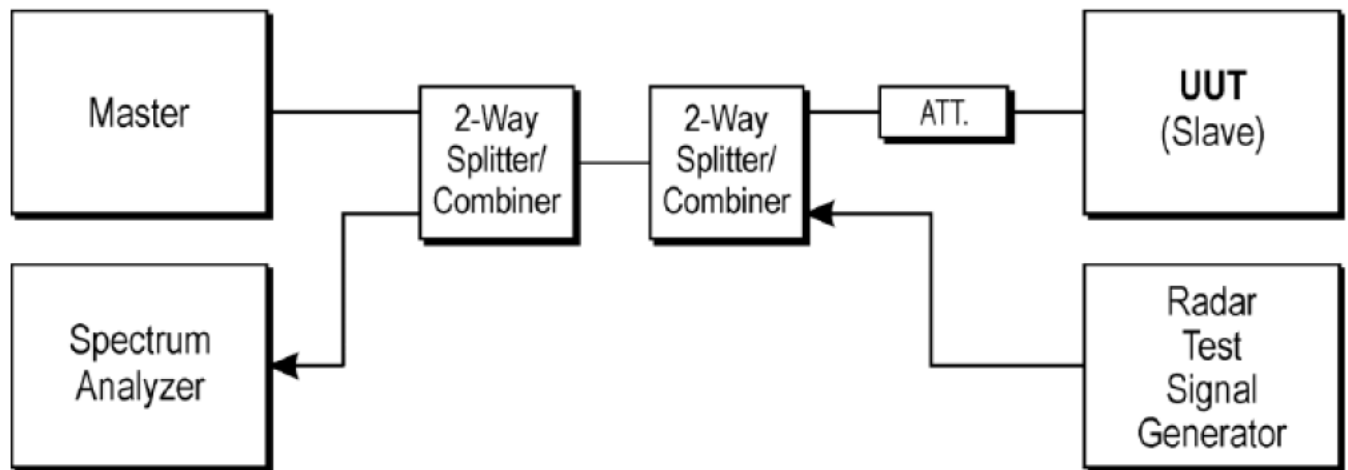

TEST REPORT

3.12.3 Radar Waveform Calibration Result

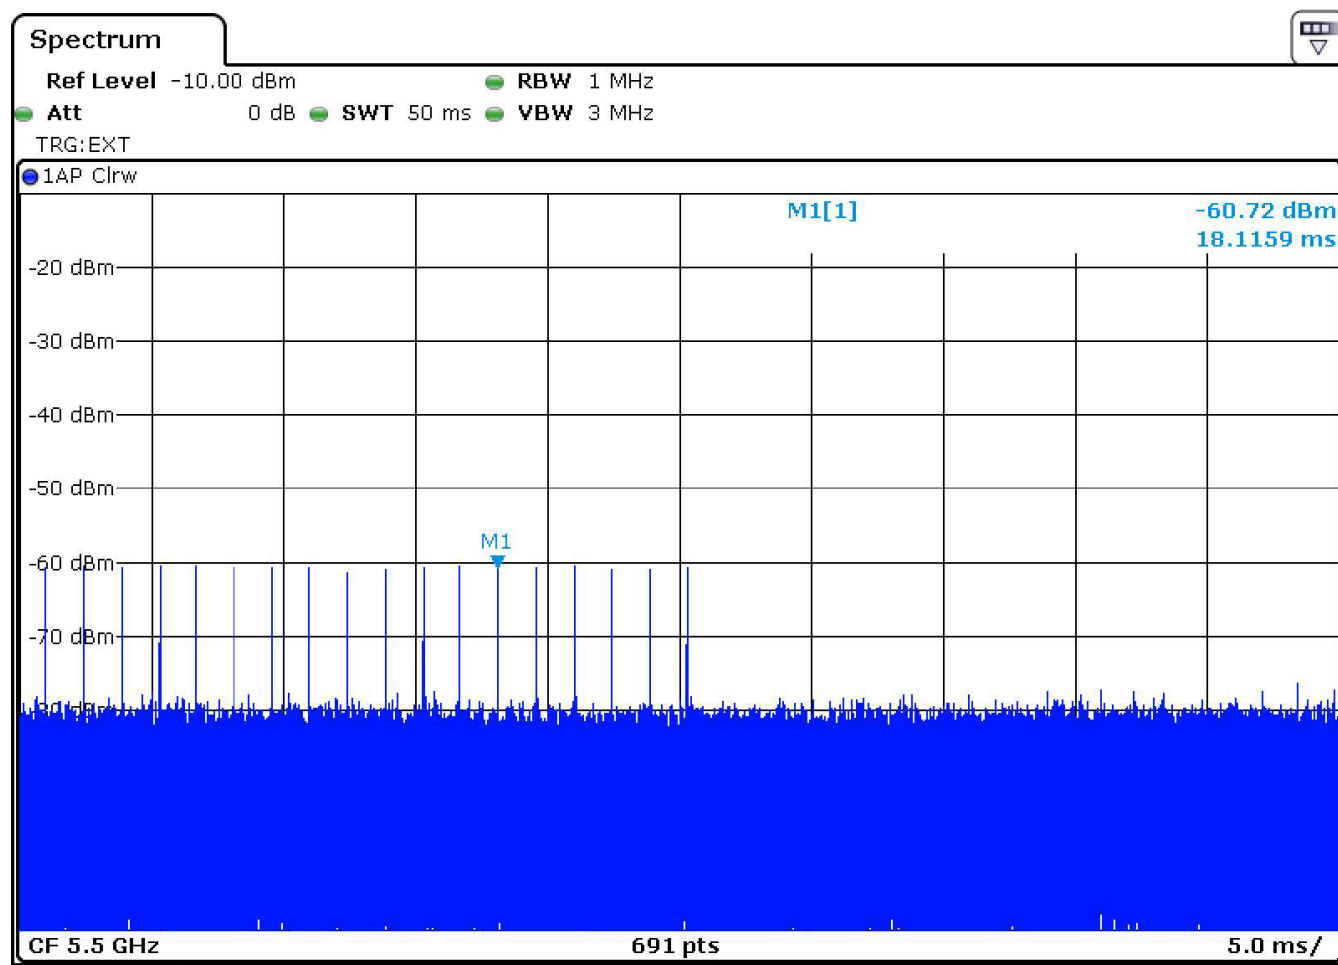

3.12.4 Test Deviation

There is no deviation with the original standard.


TEST REPORT

TL-964

3.13.1 Test Procedures

1. The radar pulse generator is setup to provide a pulse at frequency that the Master and Client are operating. A type 0 radar pulse with a 1us pulse width and a 1428 us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at a level approximately -62dBm at the antenna of the Master device.
3. An external trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. A U-NII device operating as a Client Device (EUT) will associate with the Master at same channel. The MPEG file "TestFile.mpg" specified by the FCC is streamed from the "file computer" through the master to the client device (EUT).
5. When a radar burst with a level equal to the DFS Detection Threshold + 1dB is generated on the operating Channel of the U-NII device. At time T0 the Radar Waveform generator sends a Burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmission of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the EUT during the observation time. One 20seconds plot is reported for the short pulse Radar Type 0. The plot for the short pulse radar types start at the end of the radar burst.
7. Measurement of the aggregate duration of the Channel Closing Transmission Time method:
Center Frequency: operating frequency
Span: Zero
RBW: 1MHz
VBW: 3MHz
Sweep Time: 32Sec
Detector: Max Peak
Sweep: Single.
8. Measure the EUT for more than 30minutes following the Channel move time to verify the no transmission or beacons occur on this Channel.

3.13.2 Test Setup

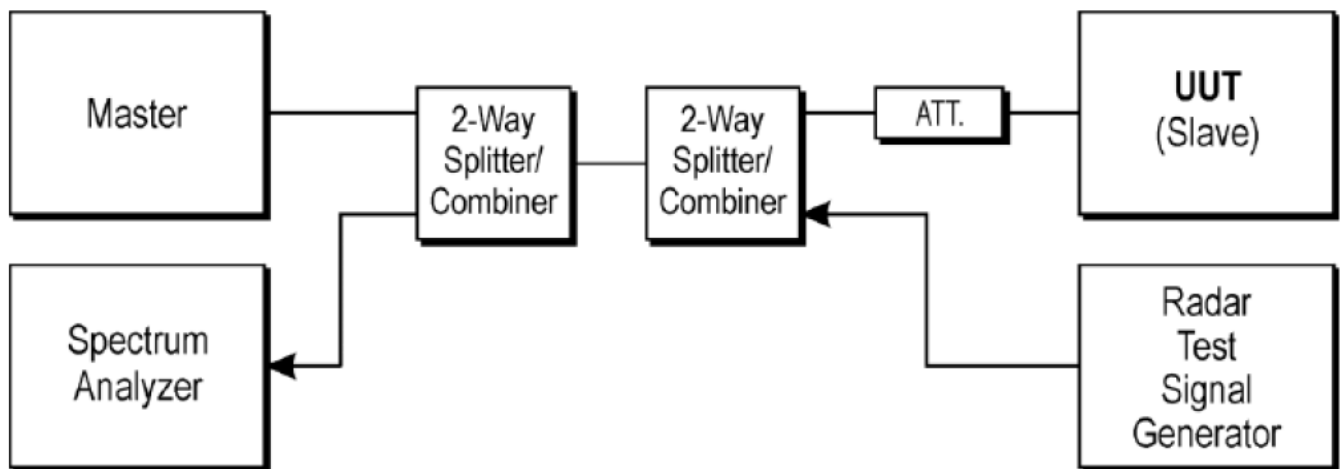

3.13.3 Test Deviation

There is no deviation with the original standard.

TEST REPORT

3.13.4 Test Result

Mode: 802.11a

Measurement Summary

DUT Frequency (MHz)	Radar Type No.	Type of Measurement value	Overall Result
5500.000000	0	Channel Move Time	PASS
5500.000000	0	Channel Closing Transmission Time	PASS

Channel Move Time Detailed Results

DUT Frequency (MHz)	Radar Type No.	CMT Tx Time (s)	CMT Limit (s)	CMT Result
5500.000000	0	5.156	10.000	PASS


Channel Closing Transmission Time Detailed Results

DUT Frequency (MHz)	Radar Type No.	CCTT Type of Value	CCTT No. of Pulses found	CCTT Tx Time (ms)
5500.000000	0	first 200 ms	7	0.496
5500.000000	0	remaining 10.0 second(s) period	15	0.876

(continuation of the "Channel Closing Transmission Time Detailed Results" table from column 5 ...)


DUT Frequency (MHz)	CCTT Tx Time Limit (ms)	CCTT Result
5500.000000	200.000	PASS
5500.000000	60.000	PASS

Channel Move Time

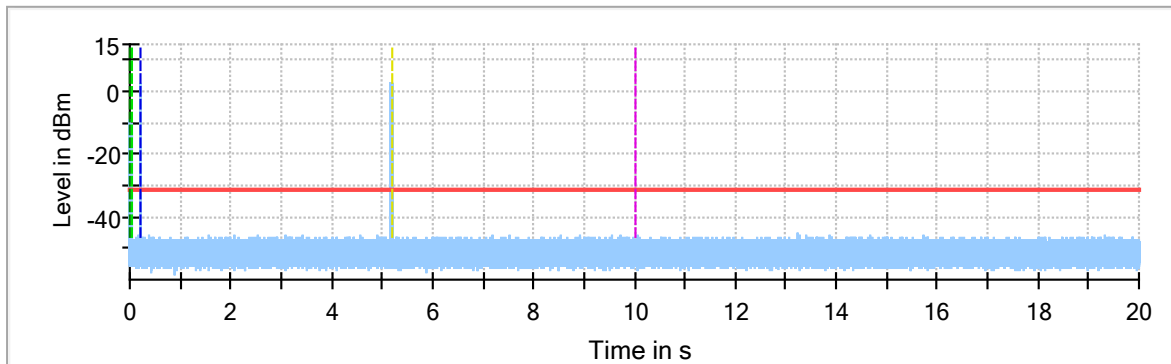

- Channel Move Time
- Threshold
- - - Start of Radar
- - - Trigger at end of Radar
- - - First 200ms of Channel Closing Tx Time
- - - 10sec Channel Move Time Limit
- - - Last measured edge of Channel Closing Tx Time

Channel Move Time first 200ms

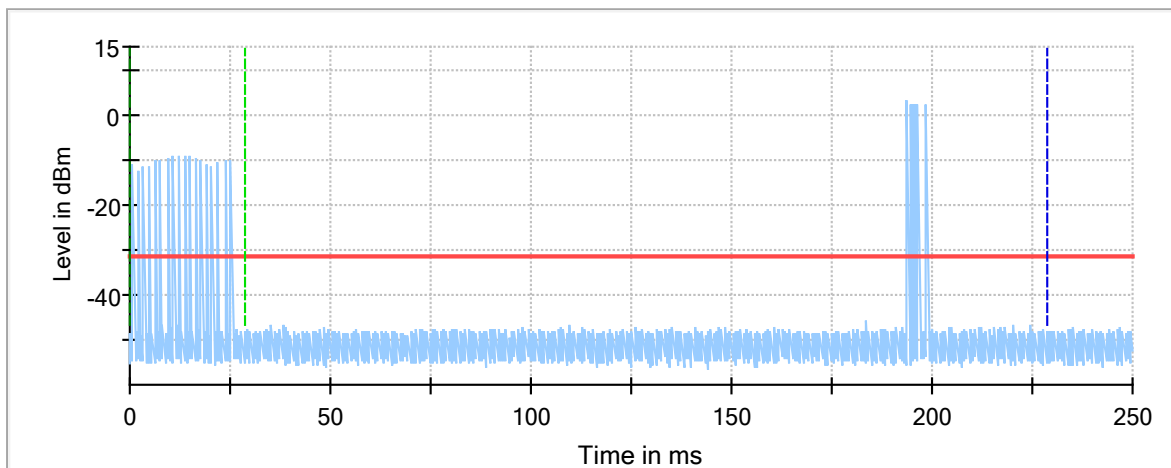

- Channel Move Time first 200ms
- Threshold
- - - Start of Radar
- - - Trigger at end of Radar
- - - First 200ms of Channel Closing Tx Time

TEST REPORT

TL-964

Mode: 802.11n (HT20MHz)

Measurement Summary

DUT Frequency (MHz)	Radar Type No.	Type of Measurement value	Overall Result
5500.000000	0	Channel Move Time	PASS
5500.000000	0	Channel Closing Transmission Time	PASS

Channel Move Time Detailed Results

DUT Frequency (MHz)	Radar Type No.	CMT Tx Time (s)	CMT Limit (s)	CMT Result
5500.000000	0	4.301	10.000	PASS


Channel Closing Transmission Time Detailed Results

DUT Frequency (MHz)	Radar Type No.	CCTT Type of Value	CCTT No. of Pulses found	CCTT Tx Time (ms)
5500.000000	0	first 200 ms	0	0.000
5500.000000	0	remaining 10.0 second(s) period	2	0.108

(continuation of the "Channel Closing Transmission Time Detailed Results" table from column 5 ...)


DUT Frequency (MHz)	CCTT Tx Time Limit (ms)	CCTT Result
5500.000000	200.000	PASS
5500.000000	60.000	PASS

Channel Move Time

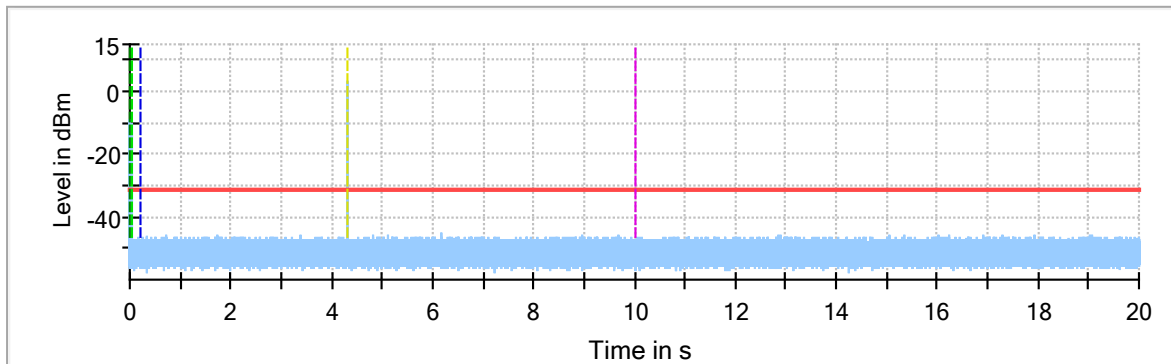

- Channel Move Time
- Threshold
- - - Start of Radar
- - - Trigger at end of Radar
- - - First 200ms of Channel Closing Tx Time
- - - 10sec Channel Move Time Limit
- - - Last measured edge of Channel Closing Tx Time

Channel Move Time first 200ms

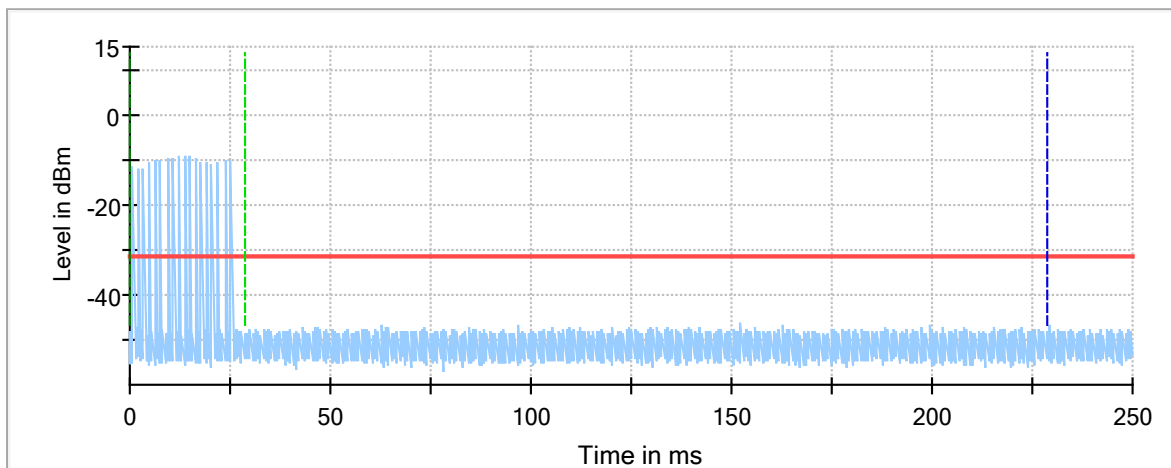

- Channel Move Time first 200ms
- Threshold
- - - Start of Radar
- - - Trigger at end of Radar
- - - First 200ms of Channel Closing Tx Time

TEST REPORT



TL-964



Dyson Inc.
Intertek Report No:
25020523HKG-002R1

EXHIBIT 4 EQUIPMENT LIST

1) Radiated Emissions Test

Equipment	EMI Test Receiver (9kHz to 26.5GHz)	Biconical Antenna (30MHz to 300MHz)	Log Periodic Antenna
Registration No.	EW-3156	EW-3242	EW-3243
Manufacturer	ROHDESCHWARZ	EMCO	EMCO
Model No.	ESR26	3110C	3148B
Calibration Date	January 31, 2024	July 30, 2024	July 30, 2024
Calibration Due Date	May 01, 2025	July 30, 2026	January 30, 2026

Equipment	Double Ridged Guide Antenna (1GHz - 18GHz)	Active Loop Antenna (H-field) (9kHz to 30MHz)	RF Preamplifier (9kHz to 6000MHz)
Registration No.	EW-0194	EW-3326	EW-3006b
Manufacturer	EMCO	EMCO	SCHWARZBECK
Model No.	3115	6502	BBV9718
Calibration Date	May 10, 2023	January 05, 2024	October 20, 2023
Calibration Due Date	May 10, 2025	July 05, 2025	April 20, 2025

Equipment	5GHz Notch Filter	14m Double Shield RF Cable (9kHz - 6GHz)	RF Cable 14m (1GHz to 26.5GHz)
Registration No.	EW-3437	EW-2376	EW-2781
Manufacturer	MICROWAVE	RADIALL	GREATBILLION
Model No.	N1255031	n m/br56/bnc m 14m	SMA m/SHF5MPU /SMA m ra14m,26G
Calibration Date	December 25, 2024	September 19, 2023	January 16, 2024
Calibration Due Date	December 25, 2025	March 19, 2025	April 16, 2025

Equipment	12 metre RF Cable (1-40)GHz	Pyramidal Horn Antenna
Registration No.	EW-2774	EW-0905
Manufacturer	GREATBILLION	EMCO
Model No.	SMA m-m ra 12m 40G outdoor	3160-09
Calibration Date	January 16, 2024	December 15, 2023
Calibration Due Date	April 16, 2025	June 15, 2025

TEST REPORT

TL-964

EXHIBIT4 EQUIPMENT LIST (CONT'D)

2) Conducted Emissions Test

Equipment	RF Cable 240cm (RG142) - (9kHz to 30MHz)	Artificial Mains Network	EMI Test Receiver (9kHz to 3GHz)
Registration No.	EW-2454	EW-3360	EW-3095
Manufacturer	RADIALL	ROHDESCHWARZ	ROHDESCHWARZ
Model No.	bnc m st / 142 /bnc m ra 240cm	ENV-216	ESCI
Calibration Date	June 20, 2024	April 07, 2024	January 18, 2024
Calibration Due Date	June 20, 2025	April 07, 2025	April 18, 2025

3) Conductive Measurement Test

Equipment	RF Power Meter with Power Sensor (N1921A)	EMI Test Receiver (9kHz to 26.5GHz)
Registration No.	EW-3309	EW-3156
Manufacturer	ROHDESCHWARZ	ROHDESCHWARZ
Model No.	NRP-Z81	ESR26
Calibration Date	January 23, 2024	January 31, 2024
Calibration Due Date	April 23, 2025	May 01, 2025

4) Control Software for Radiated Emission

Software Information	
Software Name	EMC32
Manufacturer	ROHDESCHWARZ
Software version	10.50.40

END OF TEST REPORT