



RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3813.84	45.88 PK	74	-28.12	-54.3	4.92	-49.38
2	3813.84	35.42 AV	54	-18.58	-64.76	4.92	-59.84
3	14477.16	42.35 PK	74	-31.65	-57.83	4.92	-52.91
4	14477.16	35.01 AV	54	-18.99	-65.17	4.92	-60.25
5	19046.1	49 PK	74	-25	-51.18	4.92	-46.26
6	19046.1	35.79 AV	54	-18.21	-64.39	4.92	-59.47
7	23676.5	50.49 PK	74	-23.51	-49.69	4.92	-44.77
8	23676.5	37 AV	54	-17	-63.18	4.92	-58.26
9	38636.62	42.33 PK	74	-31.67	-57.85	4.92	-52.93
10	38636.62	32.53 AV	54	-21.47	-67.65	4.92	-62.73

Note: Margin value = Emission Level - Limit value

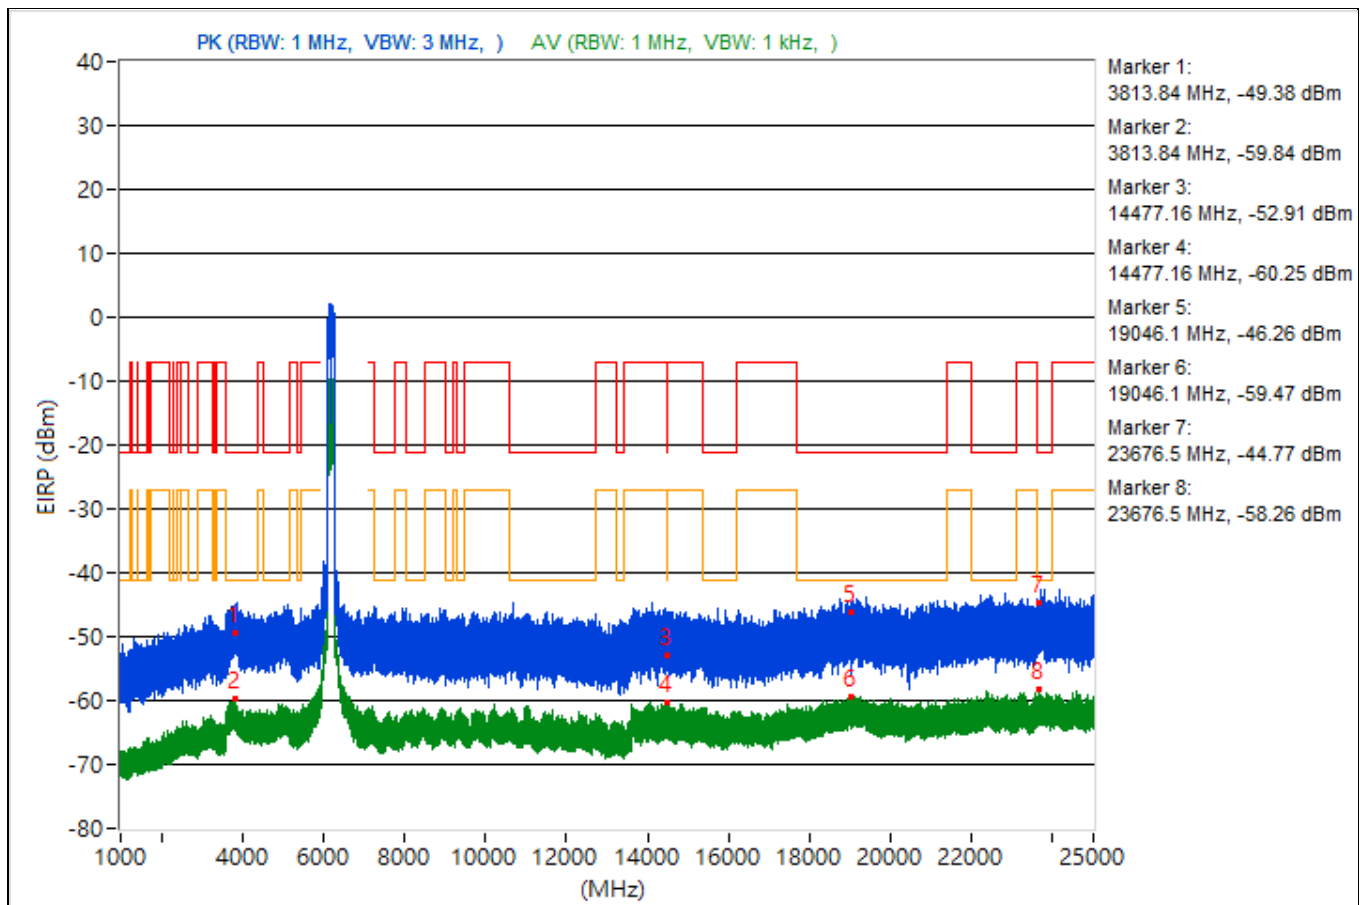


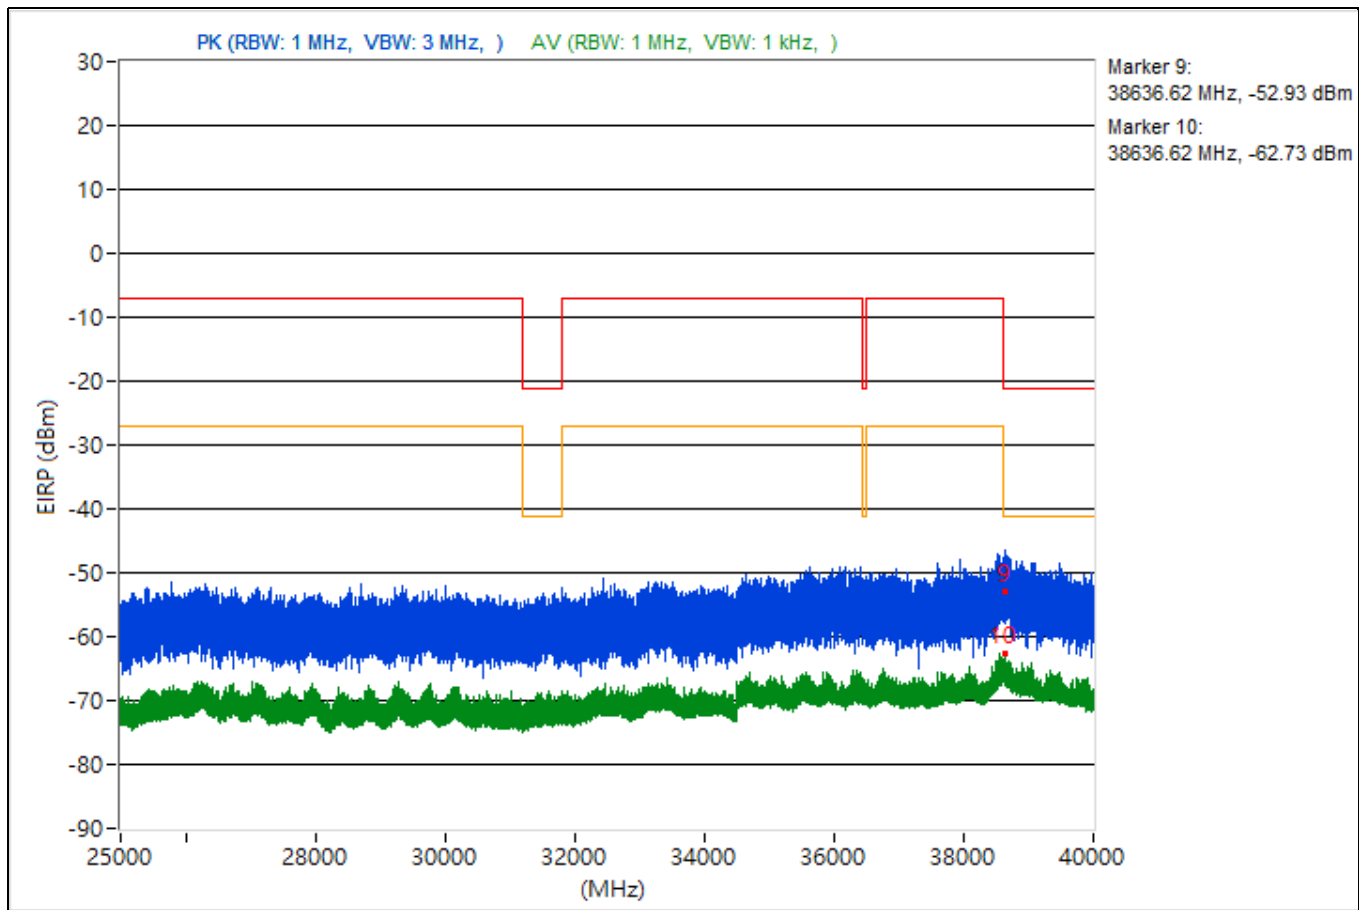


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3753.1	47.34 PK	74	-26.66	-52.84	4.92	-47.92
2	3753.1	35.35 AV	54	-18.65	-64.83	4.92	-59.91
3	14490.58	43.19 PK	74	-30.81	-56.99	4.92	-52.07
4	14490.58	35.26 AV	54	-18.74	-64.92	4.92	-60
5	19134.4	45.33 PK	74	-28.67	-54.85	4.92	-49.93
6	19134.4	36.14 AV	54	-17.86	-64.04	4.92	-59.12
7	23603	46.47 PK	74	-27.53	-53.71	4.92	-48.79
8	23603	36.85 AV	54	-17.15	-63.33	4.92	-58.41
9	38627.91	42.96 PK	74	-31.04	-57.22	4.92	-52.3
10	38627.91	32.39 AV	54	-21.61	-67.79	4.92	-62.87

Note: Margin value = Emission Level - Limit value

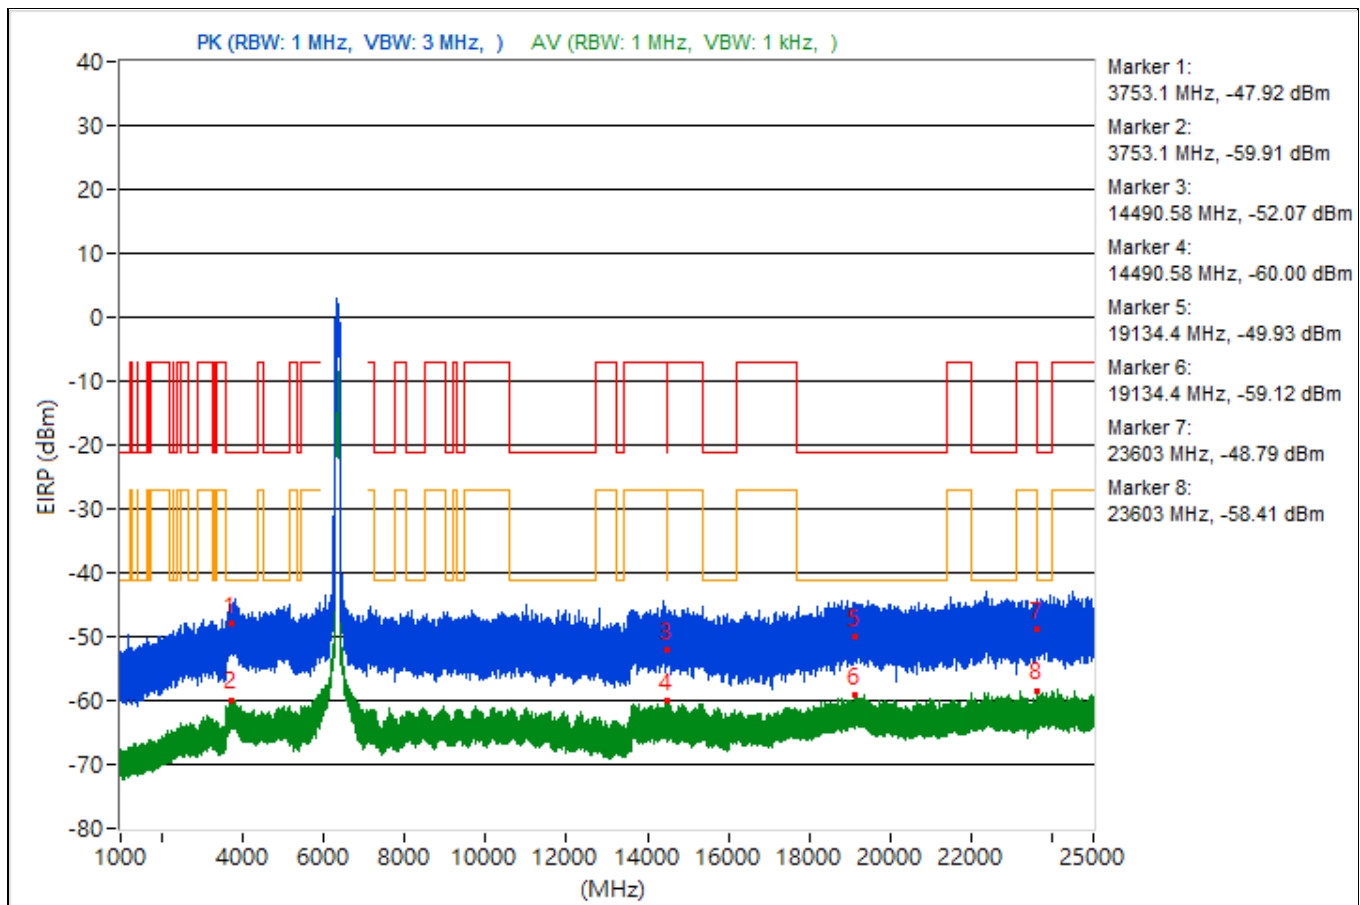


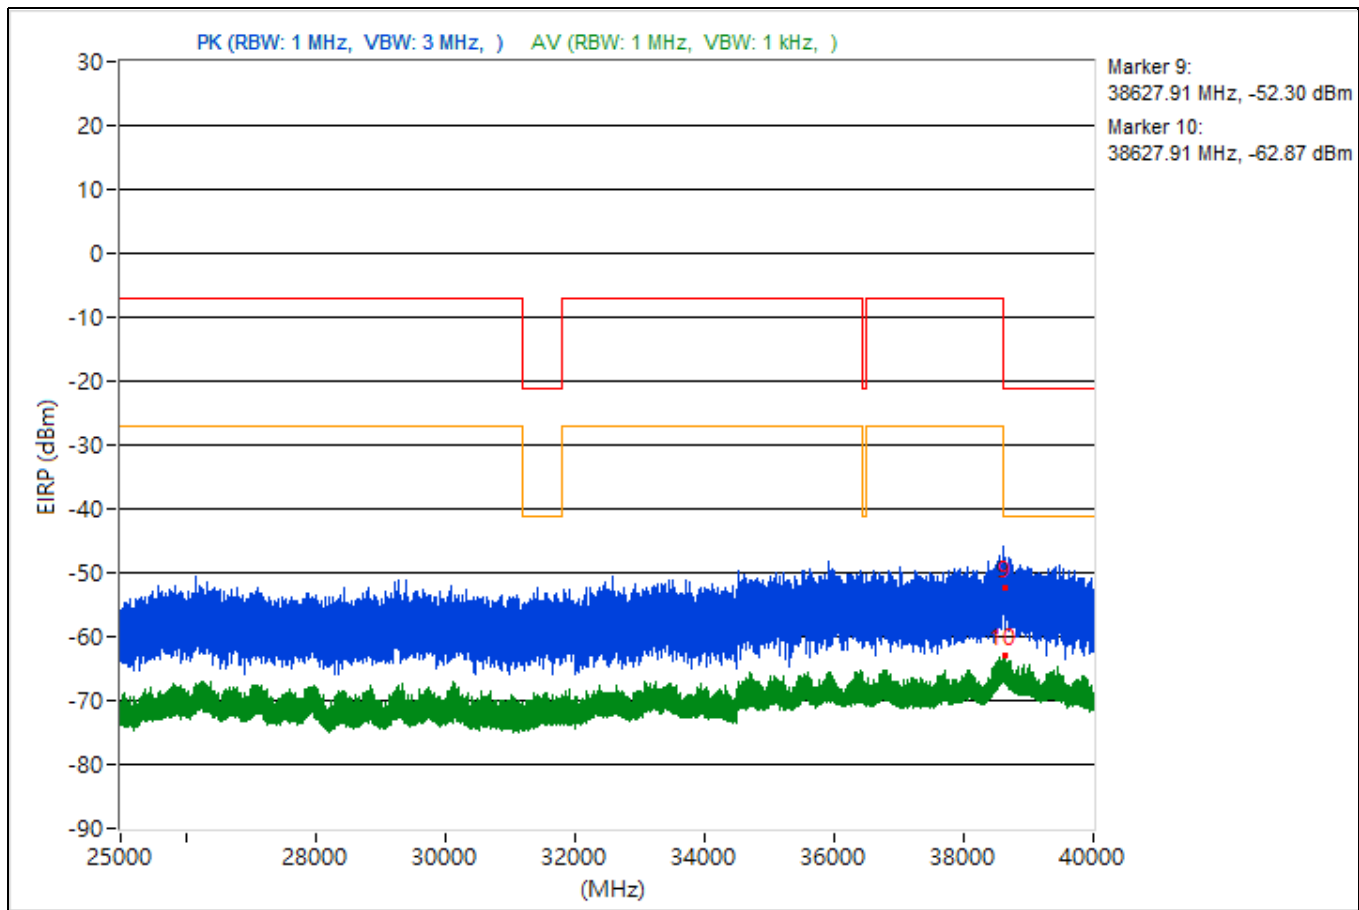


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3837.8	46.69 PK	74	-27.31	-53.49	4.92	-48.57
2	3837.8	35.69 AV	54	-18.31	-64.49	4.92	-59.57
3	11007.11	46.2 PK	74	-27.8	-53.98	4.92	-49.06
4	11007.11	35.04 AV	54	-18.96	-65.14	4.92	-60.22
5	19998.3	46.93 PK	74	-27.07	-53.25	4.92	-48.33
6	19998.3	36.25 AV	54	-17.75	-63.93	4.92	-59.01
7	22908.3	44.95 PK	74	-29.05	-55.23	4.92	-50.31
8	22908.3	36.39 AV	54	-17.61	-63.79	4.92	-58.87
9	38611.38	43.1 PK	74	-30.9	-57.08	4.92	-52.16
10	38611.38	32.11 AV	54	-21.89	-68.07	4.92	-63.15

Note: Margin value = Emission Level - Limit value

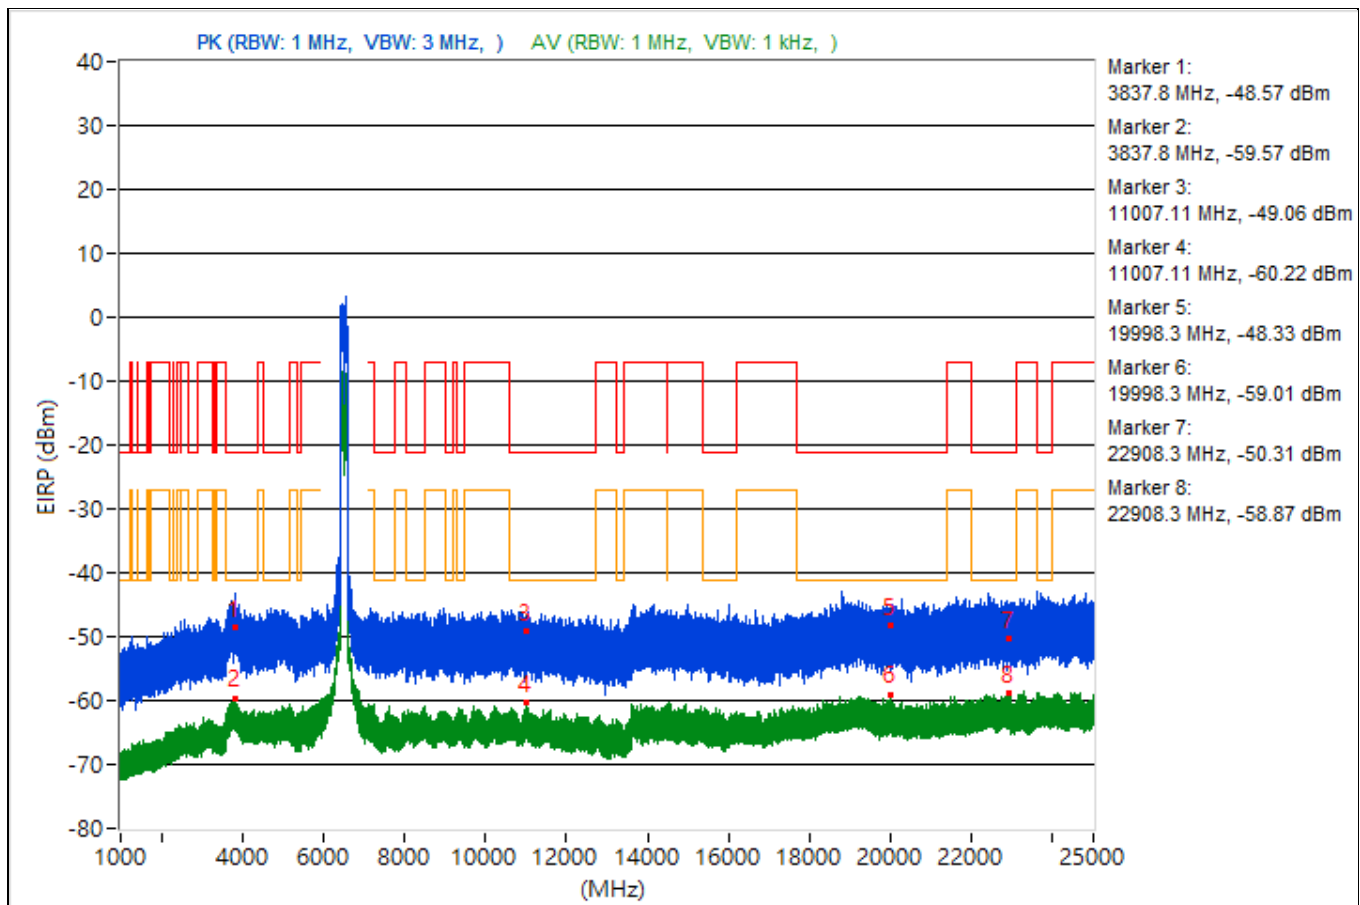


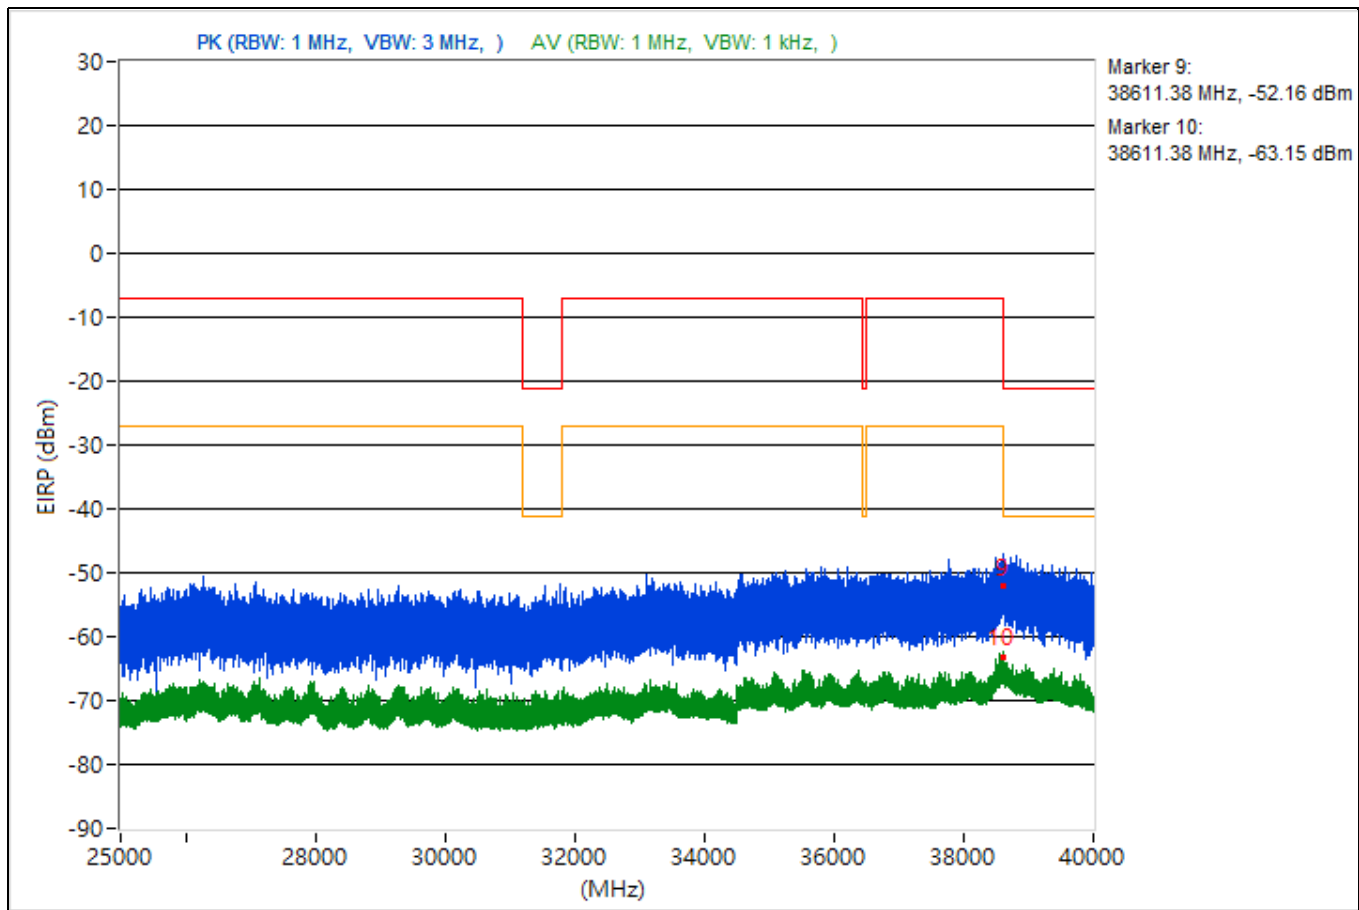


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3774.1	45.94 PK	74	-28.06	-54.24	4.92	-49.32
2	3774.1	36.47 AV	54	-17.53	-63.71	4.92	-58.79
3	15362.84	43.17 PK	74	-30.83	-57.01	4.92	-52.09
4	15362.84	34.51 AV	54	-19.49	-65.67	4.92	-60.75
5	19127.2	47.38 PK	74	-26.62	-52.8	4.92	-47.88
6	19127.2	36.11 AV	54	-17.89	-64.07	4.92	-59.15
7	22325.9	50.18 PK	74	-23.82	-50	4.92	-45.08
8	22325.9	36.84 AV	54	-17.16	-63.34	4.92	-58.42
9	38602.76	46.01 PK	74	-27.99	-54.17	4.92	-49.25
10	38602.76	33.11 AV	54	-20.89	-67.07	4.92	-62.15

Note: Margin value = Emission Level - Limit value

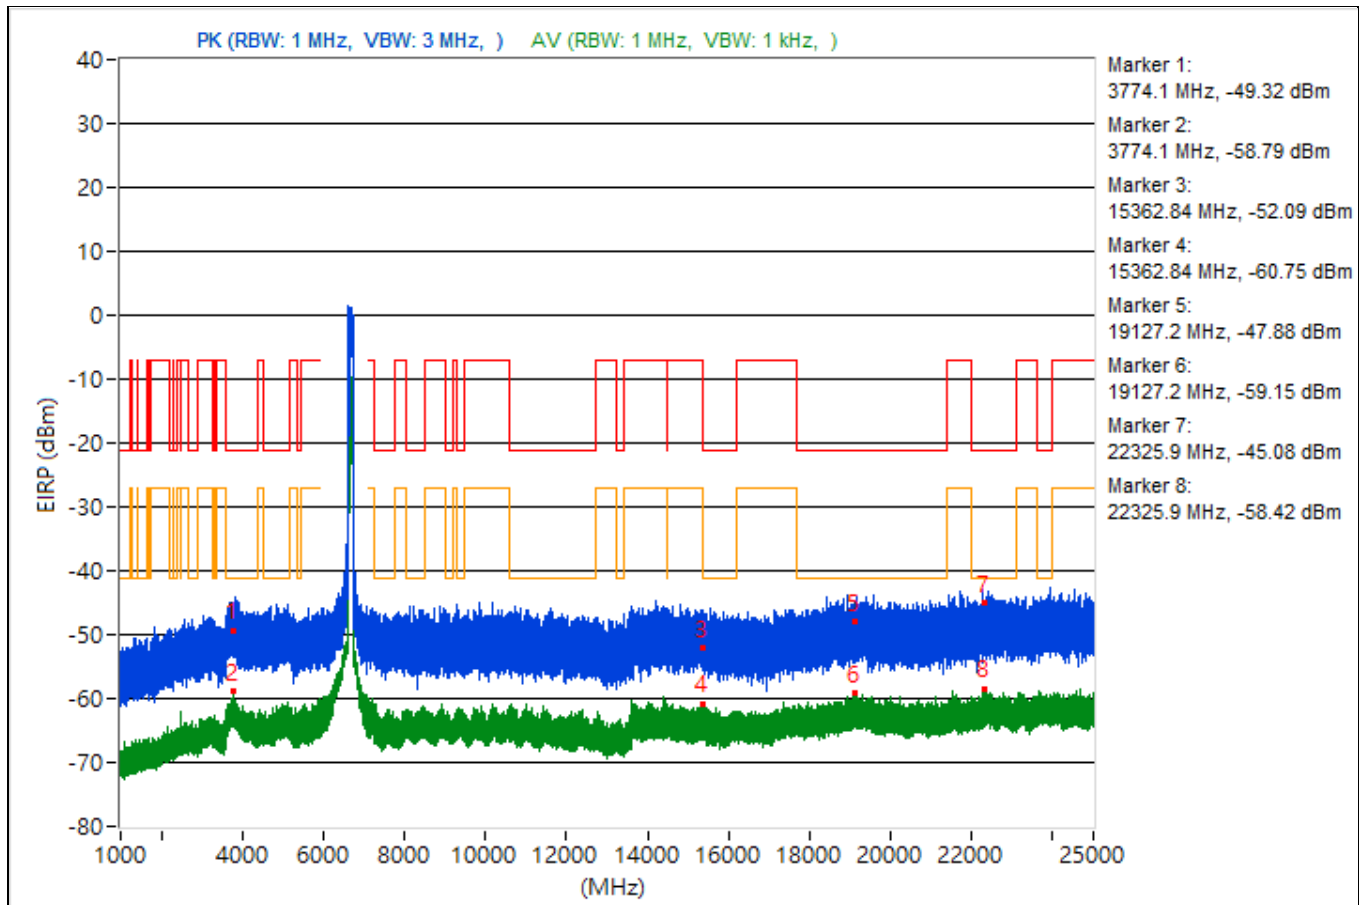


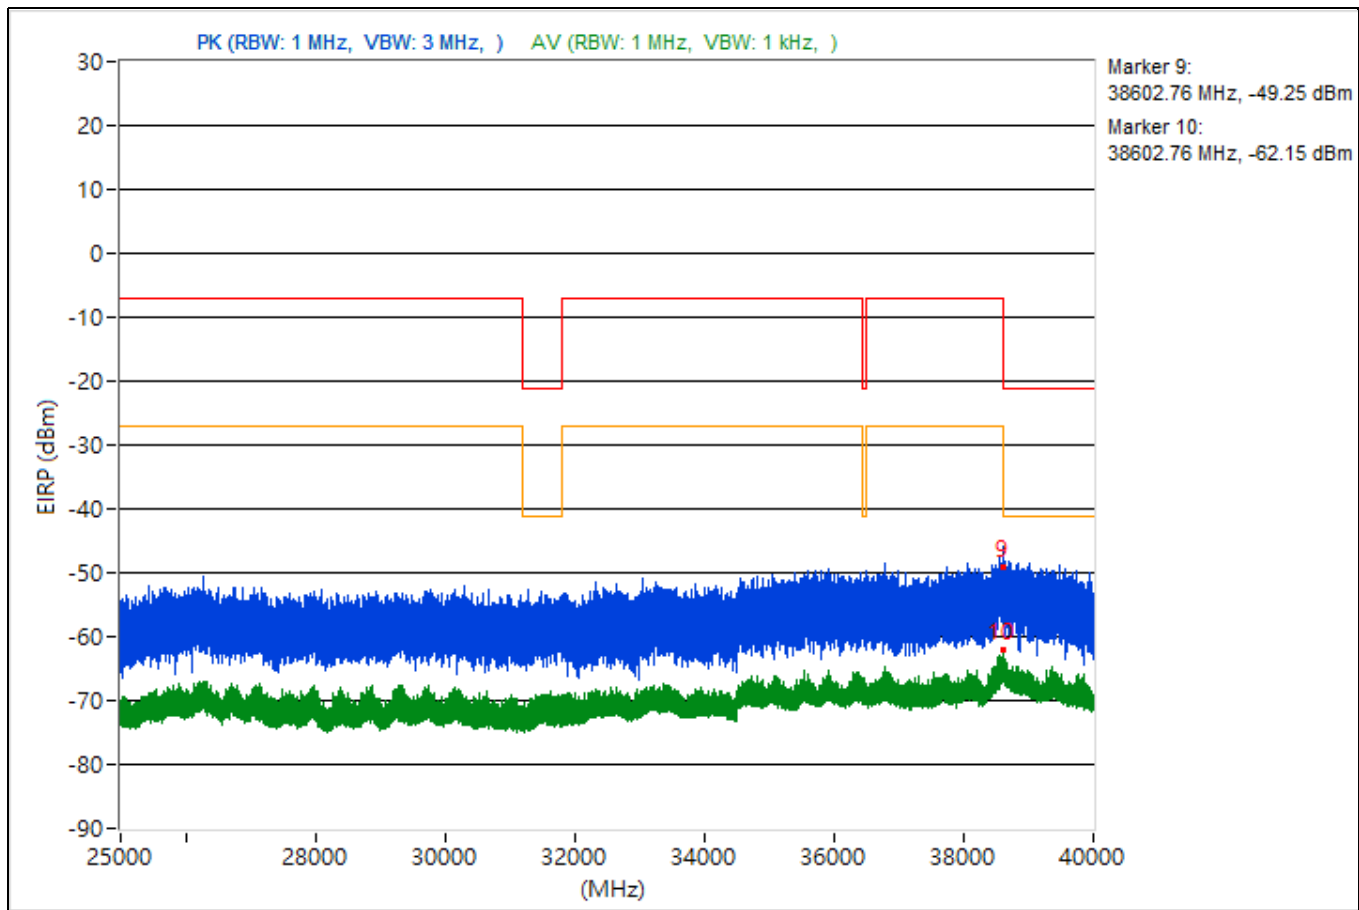


RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3759.79	43.35 PK	74	-30.65	-56.83	4.92	-51.91
2	3759.79	35.77 AV	54	-18.23	-64.41	4.92	-59.49
3	14498.58	45.57 PK	74	-28.43	-54.61	4.92	-49.69
4	14498.58	35.1 AV	54	-18.9	-65.08	4.92	-60.16
5	19410.8	45.3 PK	74	-28.7	-54.88	4.92	-49.96
6	19410.8	36.21 AV	54	-17.79	-63.97	4.92	-59.05
7	23692.5	43.91 PK	74	-30.09	-56.27	4.92	-51.35
8	23692.5	36.71 AV	54	-17.29	-63.47	4.92	-58.55
9	38612.36	41.02 PK	74	-32.98	-59.16	4.92	-54.24
10	38612.36	32.28 AV	54	-21.72	-67.9	4.92	-62.98

Note: Margin value = Emission Level - Limit value

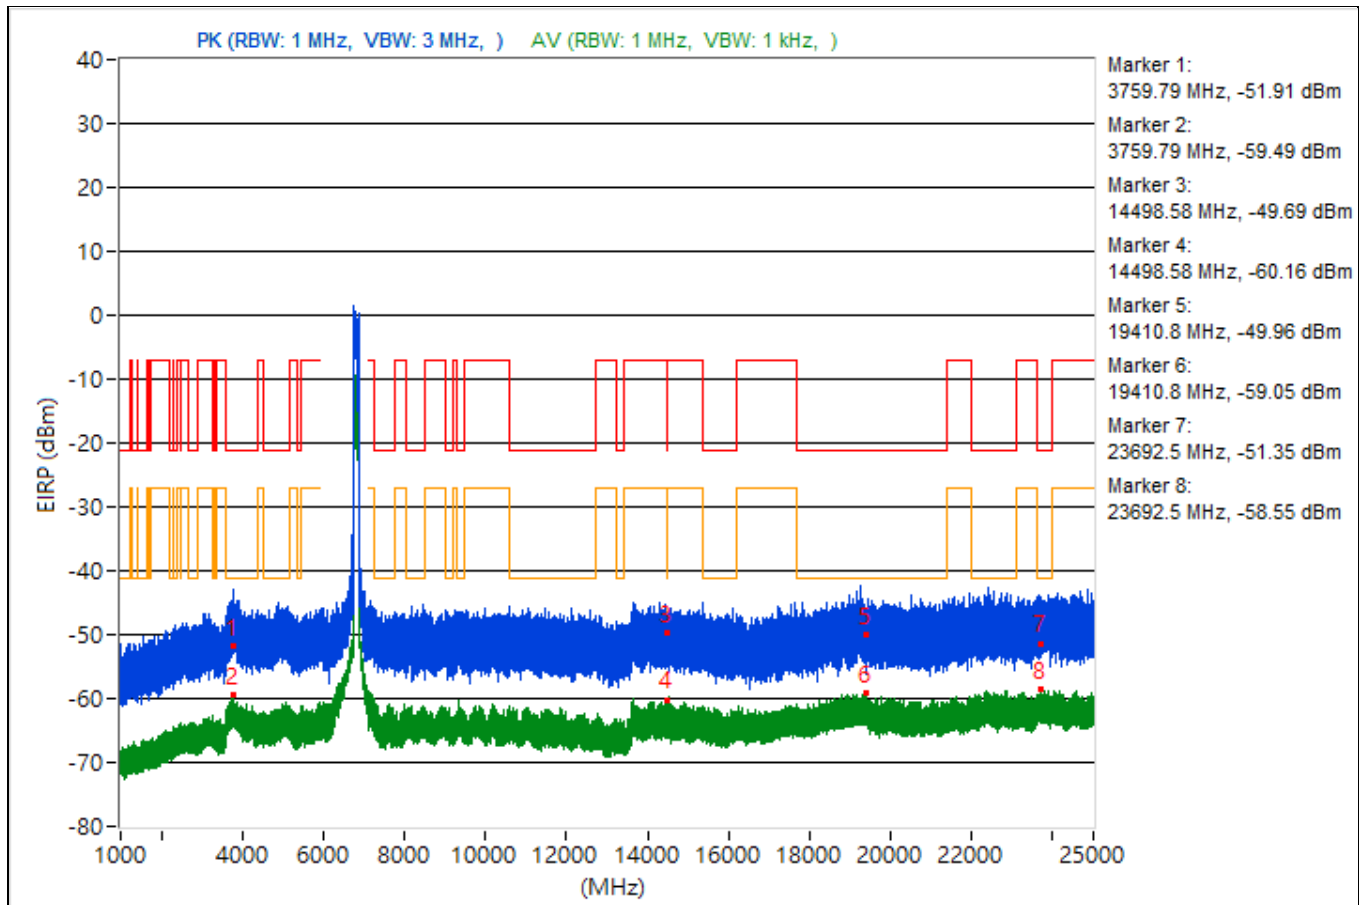


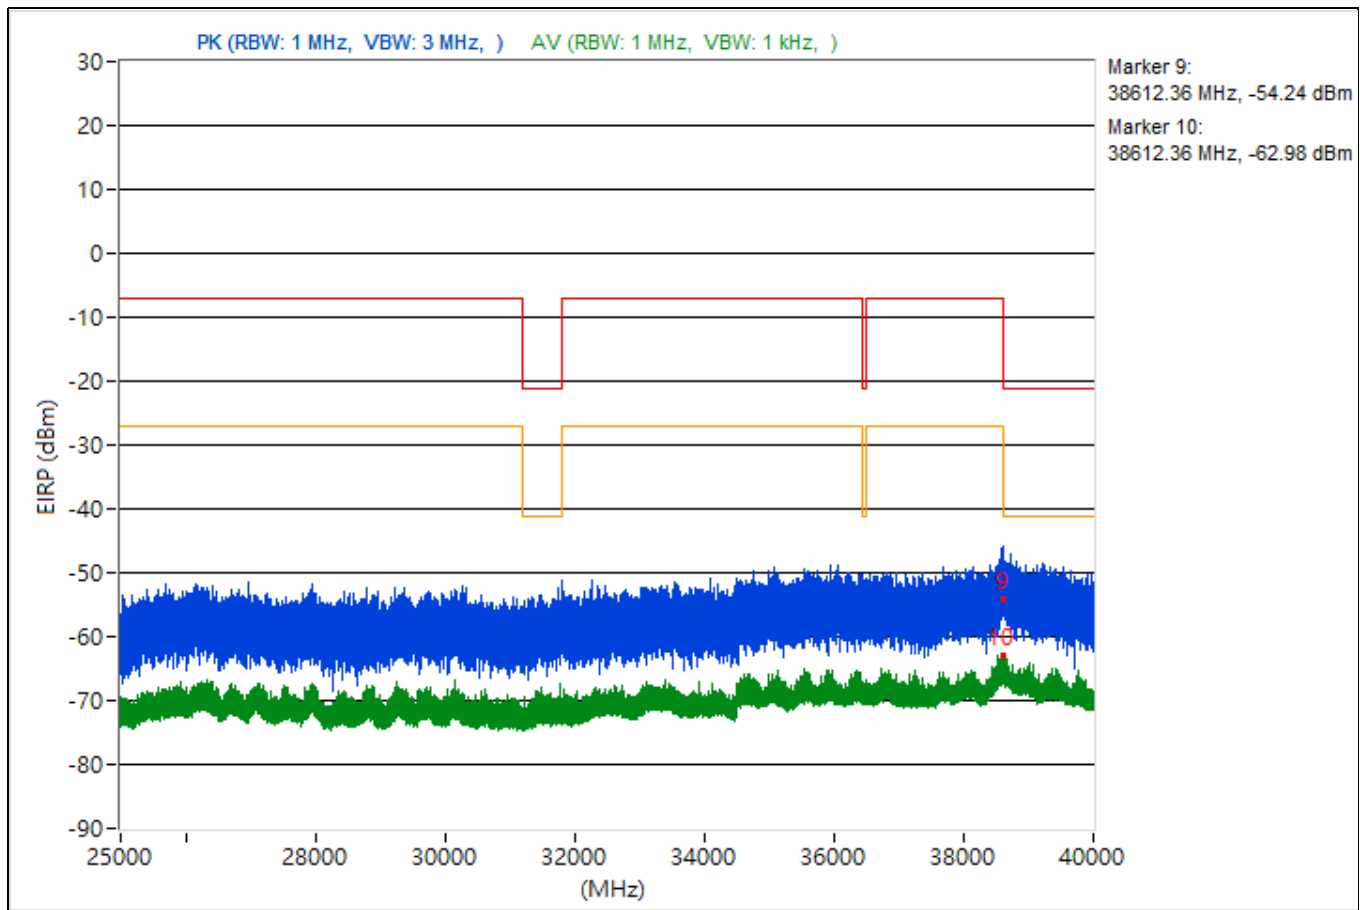


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3713.36	45.45 PK	74	-28.55	-54.73	4.92	-49.81
2	3713.36	35.25 AV	54	-18.75	-64.93	4.92	-60.01
3	7253.64	44.54 PK	74	-29.46	-55.64	4.92	-50.72
4	7253.64	36.07 AV	54	-17.93	-64.11	4.92	-59.19
5	19024.8	45.62 PK	74	-28.38	-54.56	4.92	-49.64
6	19024.8	35.85 AV	54	-18.15	-64.33	4.92	-59.41
7	22789.4	45.13 PK	74	-28.87	-55.05	4.92	-50.13
8	22789.4	36.96 AV	54	-17.04	-63.22	4.92	-58.3
9	38606.4	44.39 PK	74	-29.61	-55.79	4.92	-50.87
10	38606.4	32.41 AV	54	-21.59	-67.77	4.92	-62.85

Note: Margin value = Emission Level - Limit value

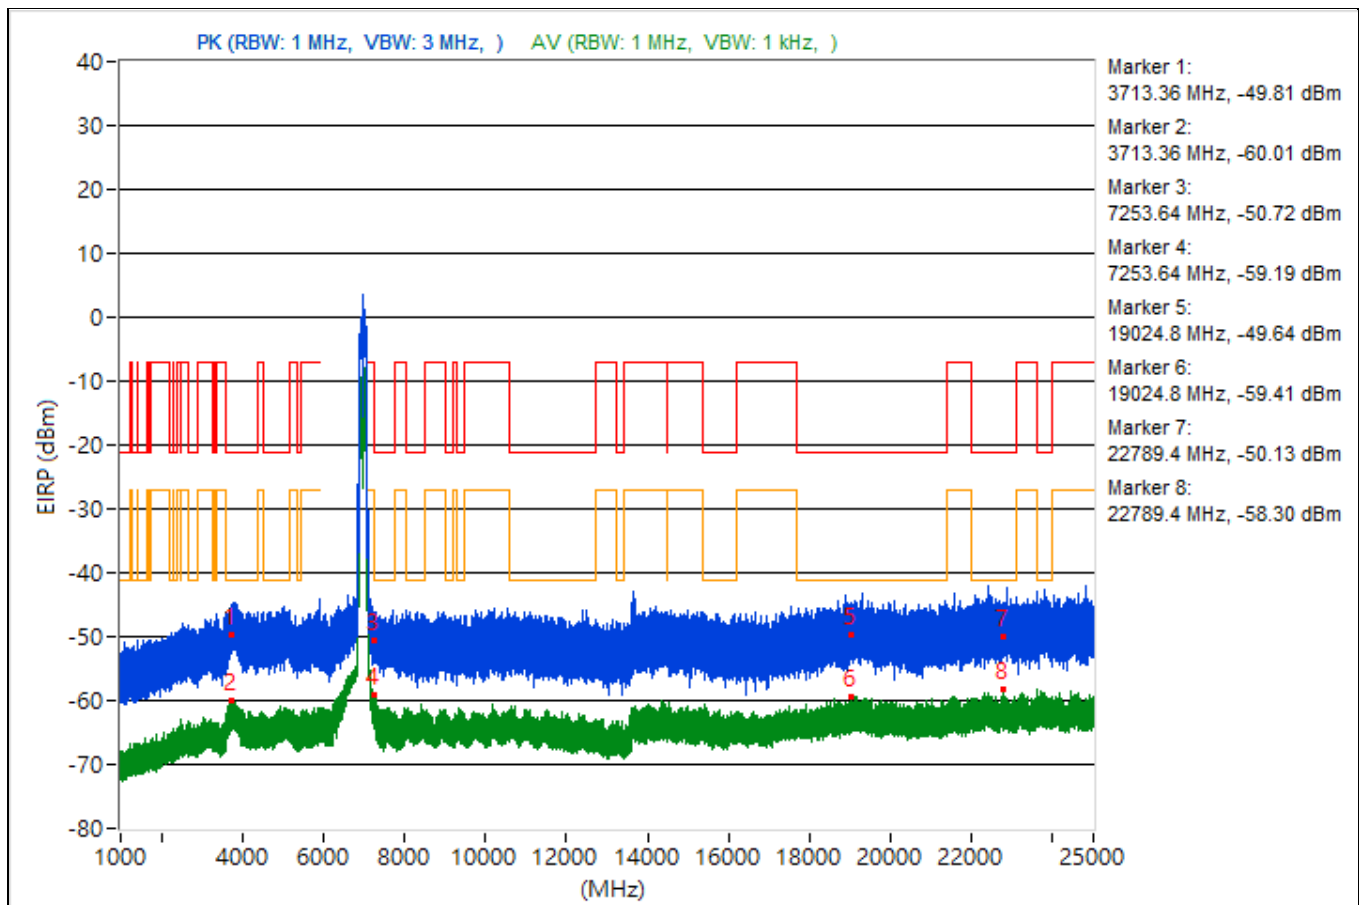


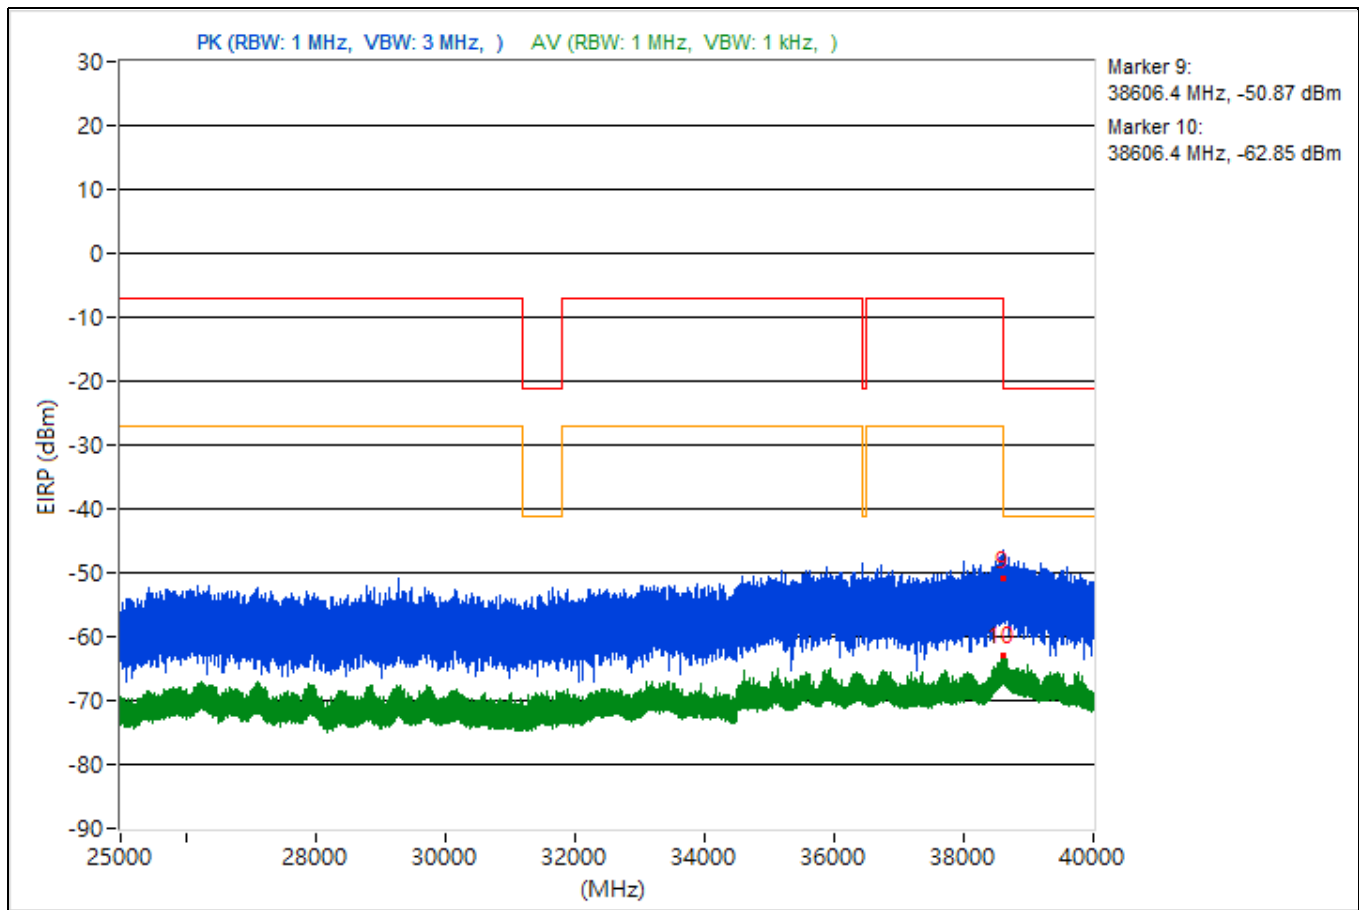


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3831.34	49.22 PK	74	-24.78	-50.96	4.92	-46.04
2	3831.34	36.34 AV	54	-17.66	-63.84	4.92	-58.92
3	14497.16	42.79 PK	74	-31.21	-57.39	4.92	-52.47
4	14497.16	35.12 AV	54	-18.88	-65.06	4.92	-60.14
5	19103.7	48.93 PK	74	-25.07	-51.25	4.92	-46.33
6	19103.7	36.56 AV	54	-17.44	-63.62	4.92	-58.7
7	22451.7	46.64 PK	74	-27.36	-53.54	4.92	-48.62
8	22451.7	37.51 AV	54	-16.49	-62.67	4.92	-57.75
9	38603.47	45.07 PK	74	-28.93	-55.11	4.92	-50.19
10	38603.47	33.91 AV	54	-20.09	-66.27	4.92	-61.35

Note: Margin value = Emission Level - Limit value

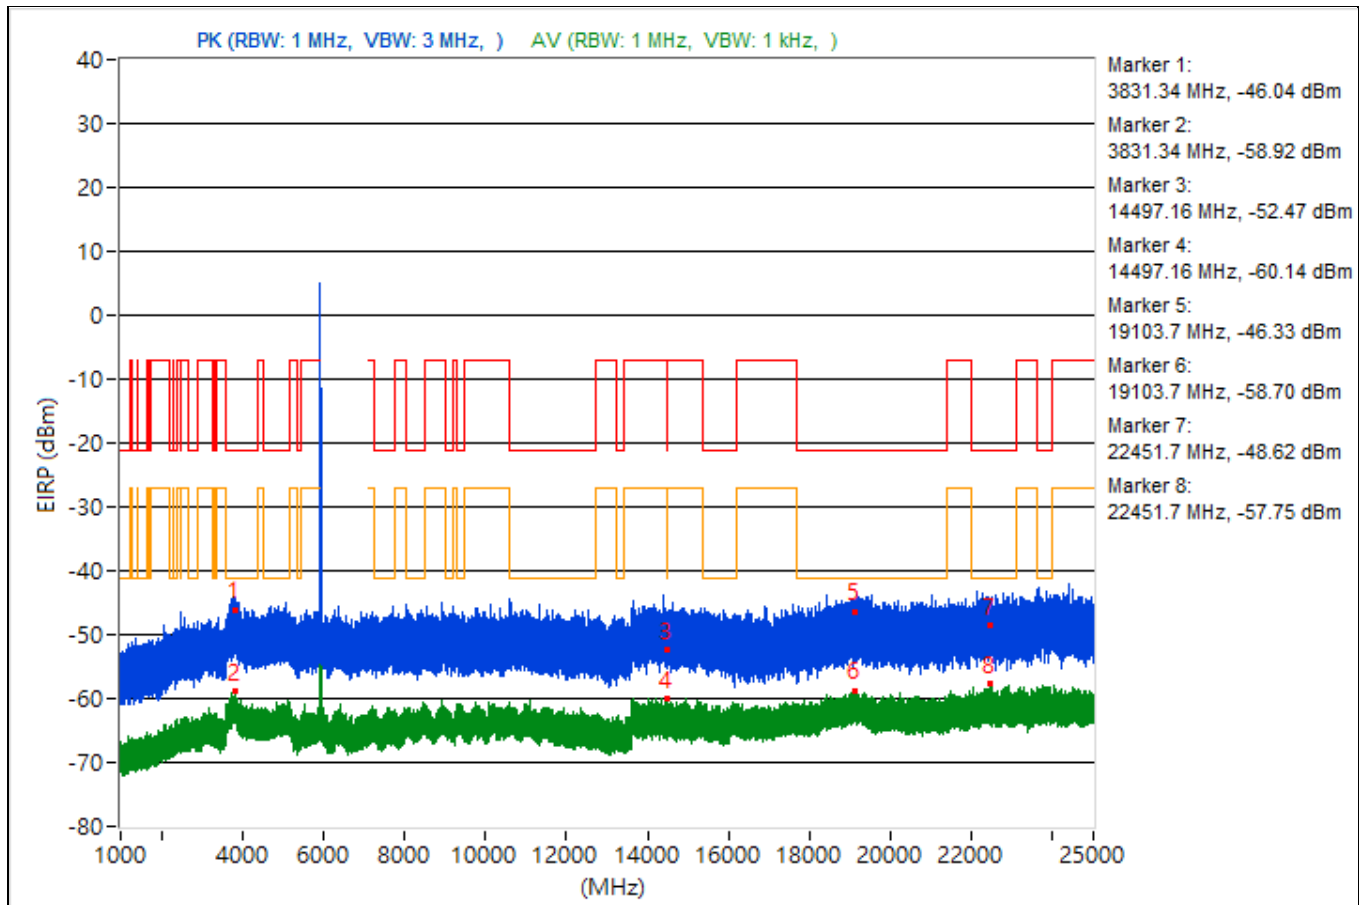


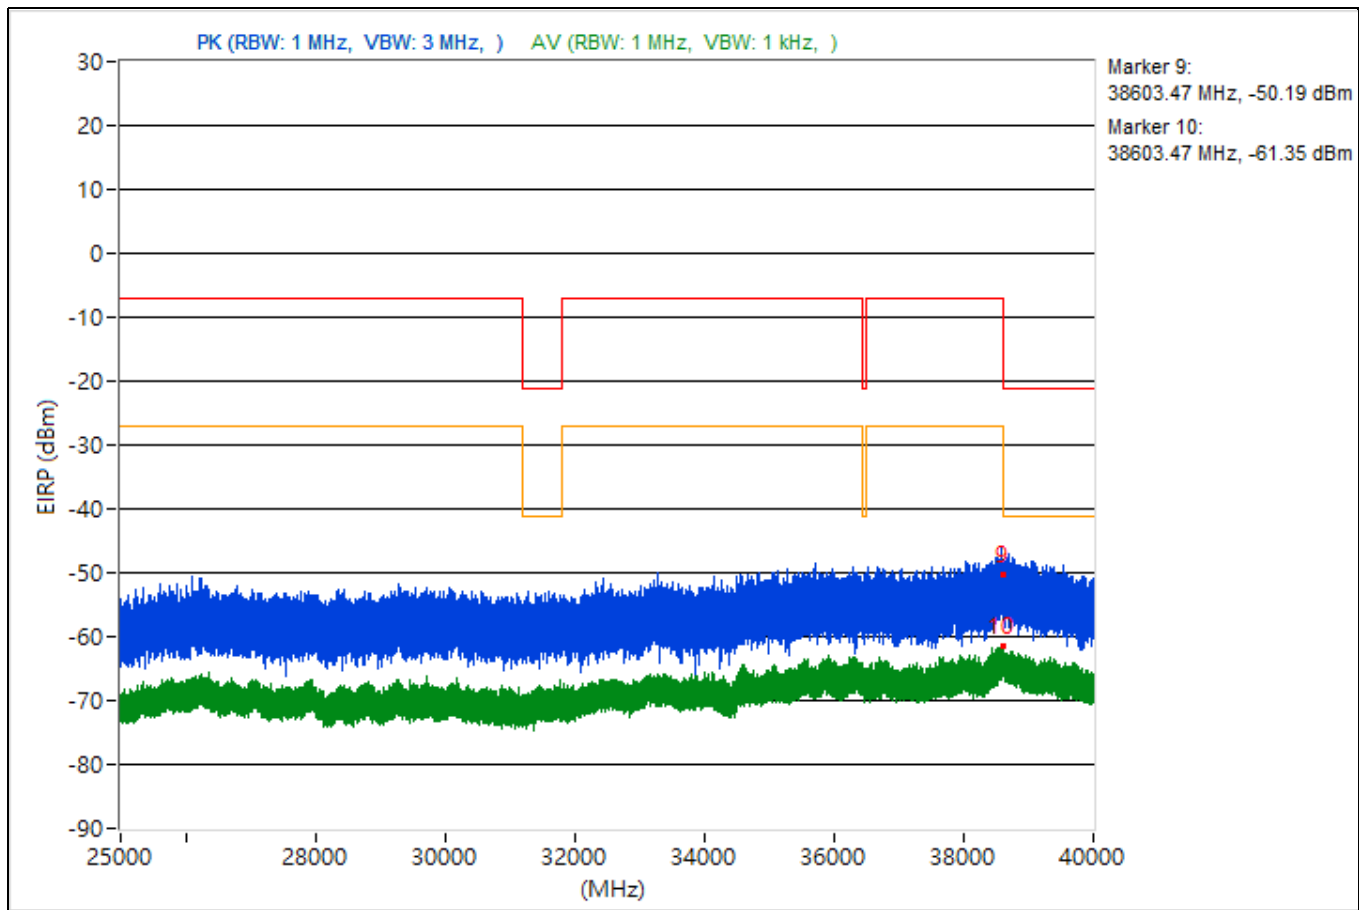


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3841.07	46.95 PK	74	-27.05	-53.23	4.92	-48.31
2	3841.07	36.72 AV	54	-17.28	-63.46	4.92	-58.54
3	14476.71	44.96 PK	74	-29.04	-55.22	4.92	-50.3
4	14476.71	35.42 AV	54	-18.58	-64.76	4.92	-59.84
5	21320.6	41.22 PK	74	-32.78	-58.96	4.92	-54.04
6	21320.6	36.46 AV	54	-17.54	-63.72	4.92	-58.8
7	23918.4	43.09 PK	74	-30.91	-57.09	4.92	-52.17
8	23918.4	37.2 AV	54	-16.8	-62.98	4.92	-58.06
9	38622.76	42.43 PK	74	-31.57	-57.75	4.92	-52.83
10	38622.76	33.45 AV	54	-20.55	-66.73	4.92	-61.81

Note: Margin value = Emission Level - Limit value

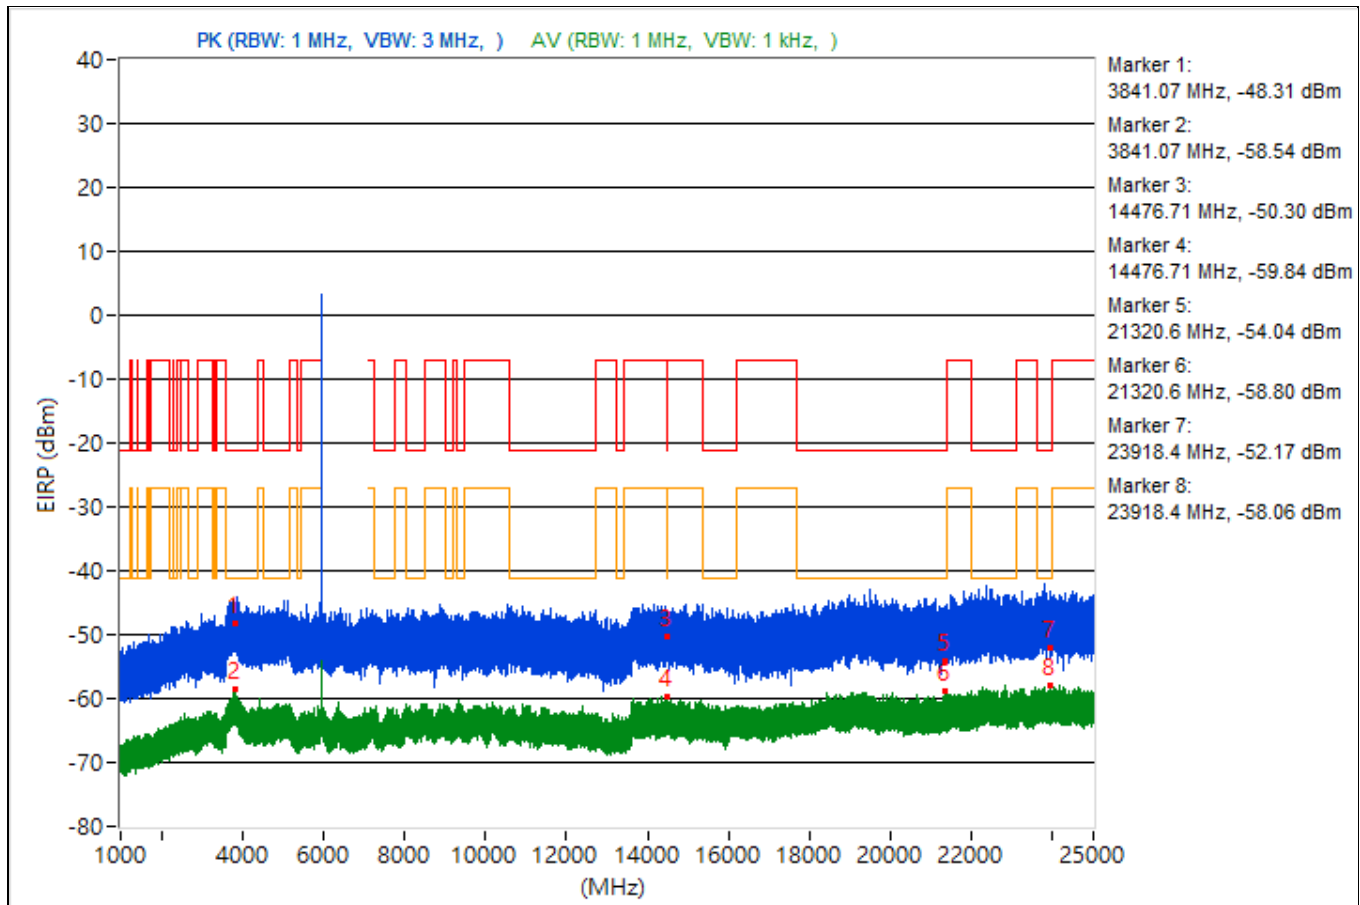


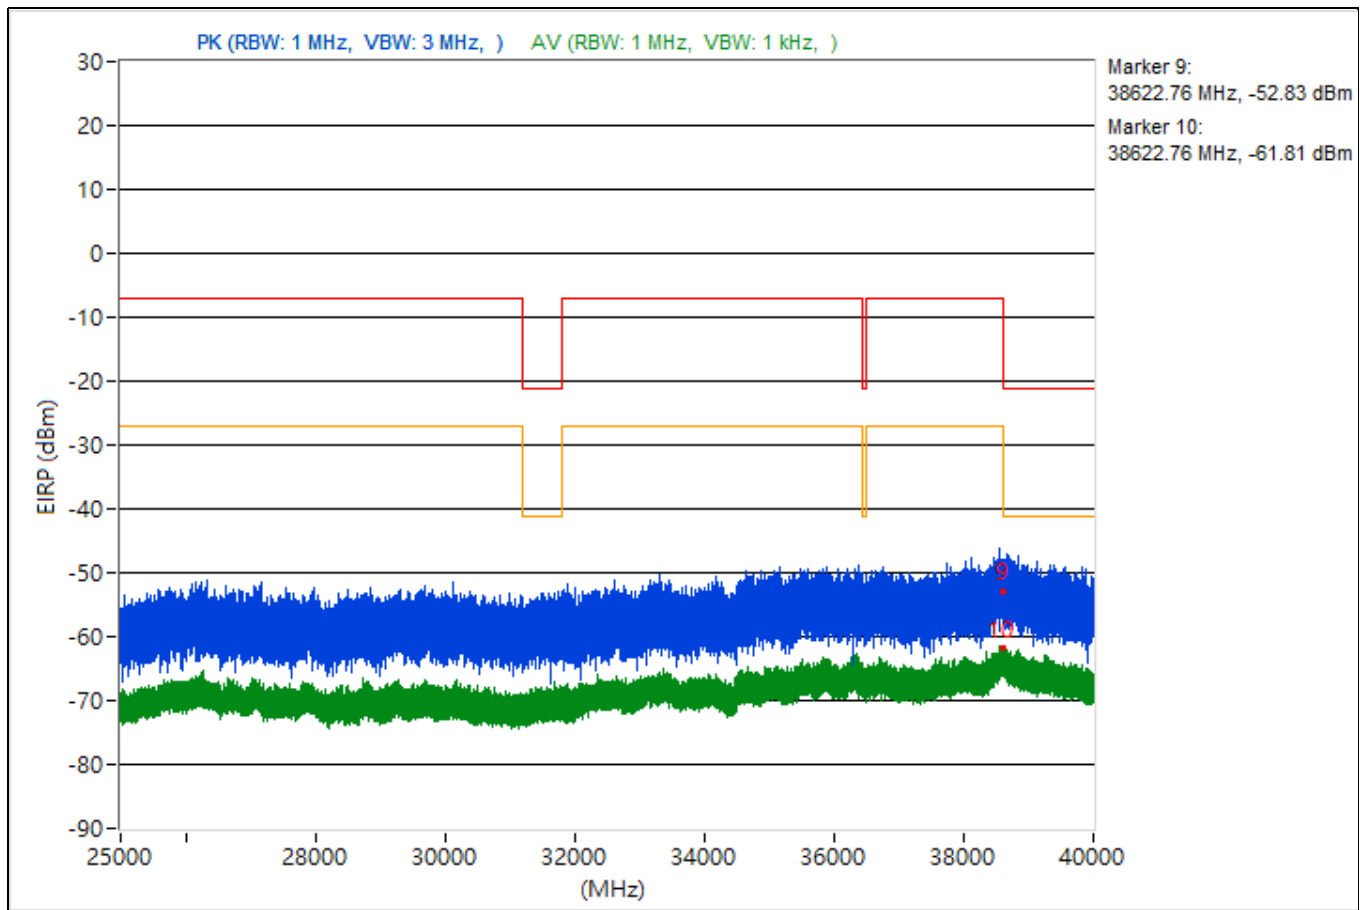


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3761.34	44.24 PK	74	-29.76	-55.94	4.92	-51.02
2	3761.34	35.94 AV	54	-18.06	-64.24	4.92	-59.32
3	15358.22	43.01 PK	74	-30.99	-57.17	4.92	-52.25
4	15358.22	34.96 AV	54	-19.04	-65.22	4.92	-60.3
5	19406	47.41 PK	74	-26.59	-52.77	4.92	-47.85
6	19406	36.75 AV	54	-17.25	-63.43	4.92	-58.51
7	23648.6	47.07 PK	74	-26.93	-53.11	4.92	-48.19
8	23648.6	37.57 AV	54	-16.43	-62.61	4.92	-57.69
9	38608.71	43.24 PK	74	-30.76	-56.94	4.92	-52.02
10	38608.71	33.95 AV	54	-20.05	-66.23	4.92	-61.31

Note: Margin value = Emission Level - Limit value

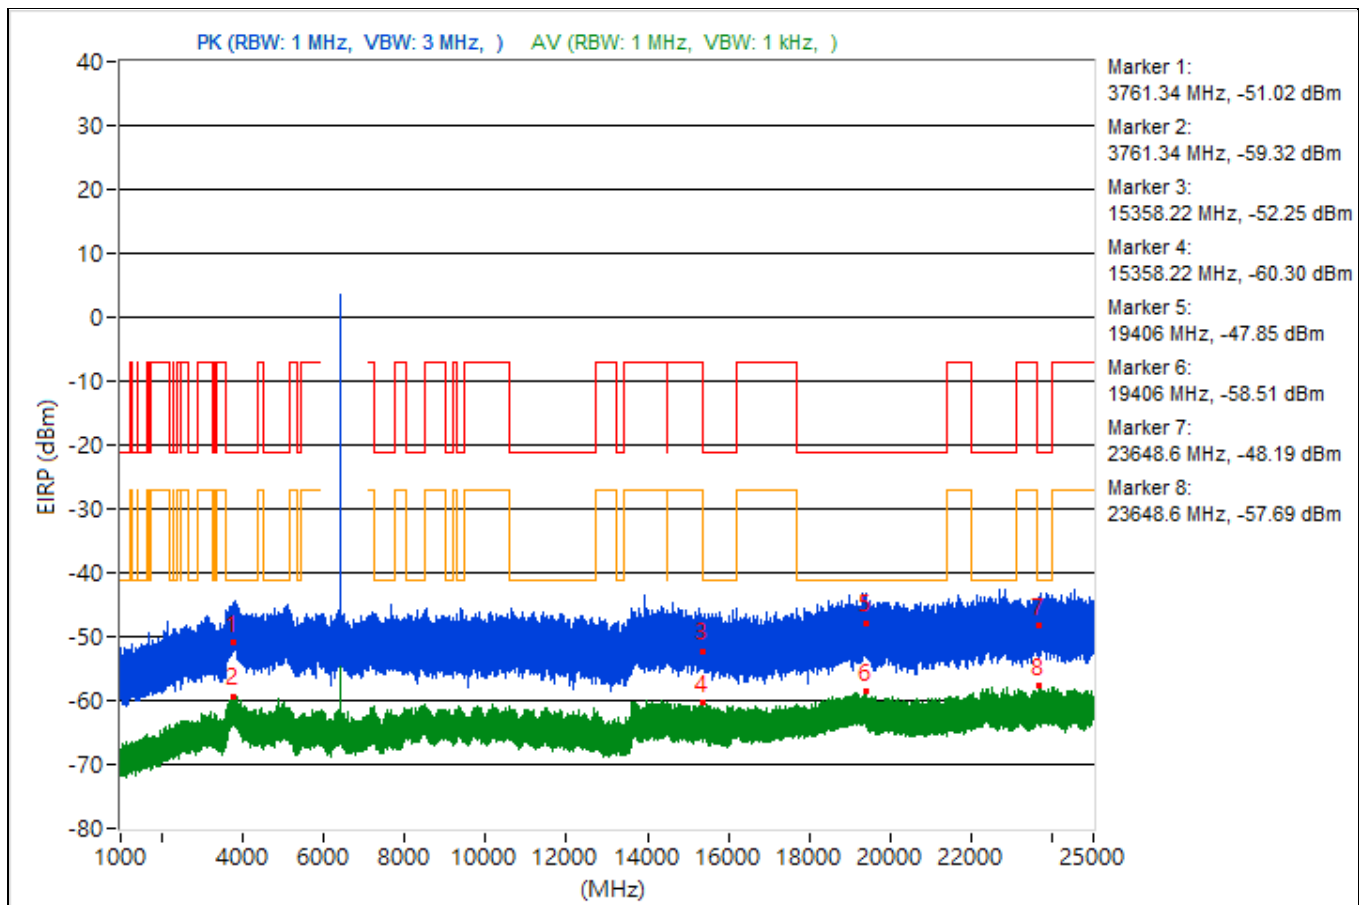


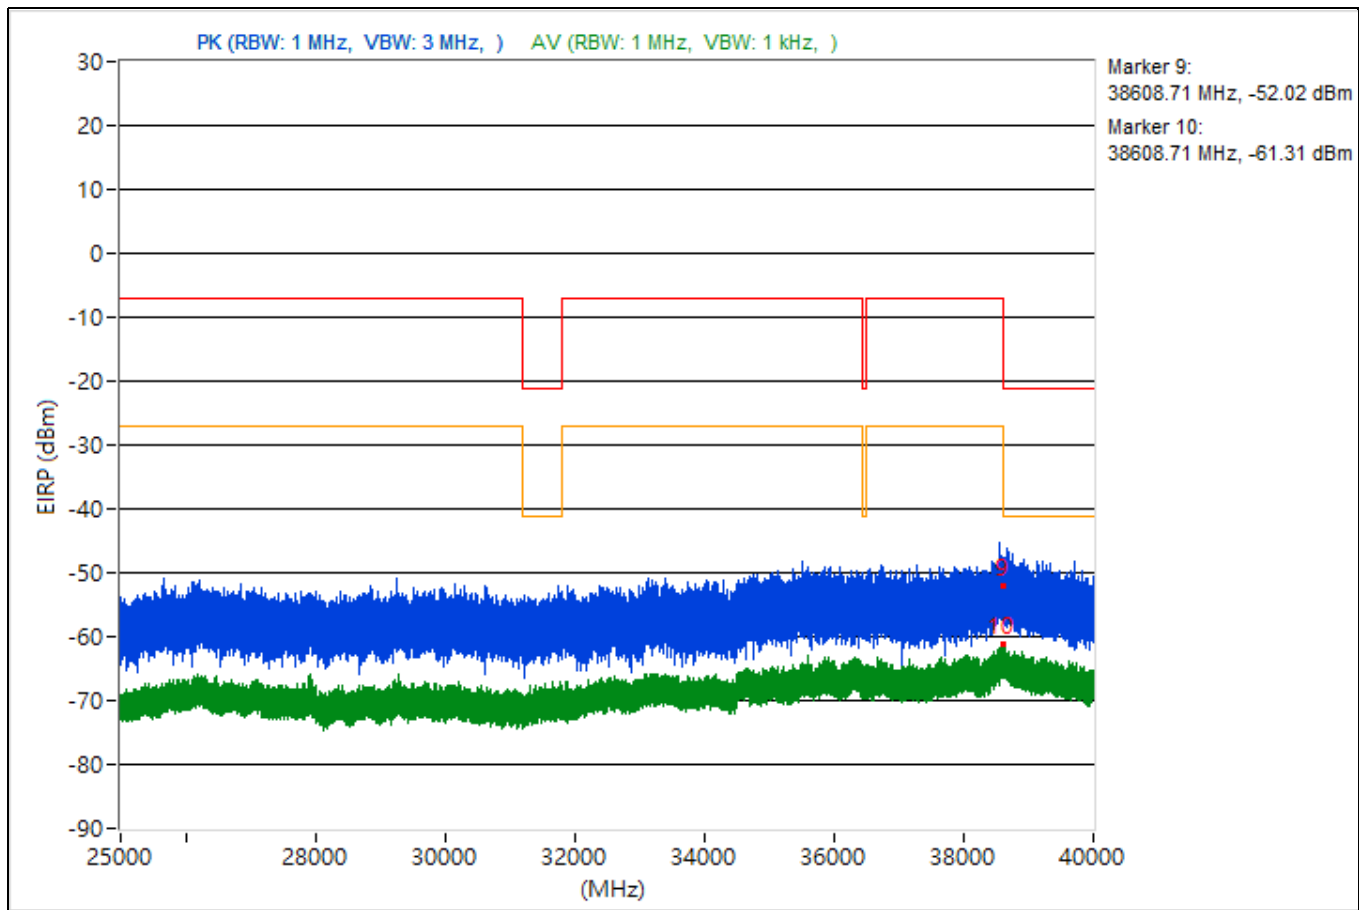


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3813.92	45.64 PK	74	-28.36	-54.54	4.92	-49.62
2	3813.92	35.69 AV	54	-18.31	-64.49	4.92	-59.57
3	14477.42	45.91 PK	74	-28.09	-54.27	4.92	-49.35
4	14477.42	35.15 AV	54	-18.85	-65.03	4.92	-60.11
5	19292.8	43.99 PK	74	-30.01	-56.19	4.92	-51.27
6	19292.8	36.47 AV	54	-17.53	-63.71	4.92	-58.79
7	23711.1	47.86 PK	74	-26.14	-52.32	4.92	-47.4
8	23711.1	37.37 AV	54	-16.63	-62.81	4.92	-57.89
9	38654.67	41.75 PK	74	-32.25	-58.43	4.92	-53.51
10	38654.67	34.41 AV	54	-19.59	-65.77	4.92	-60.85

Note: Margin value = Emission Level - Limit value

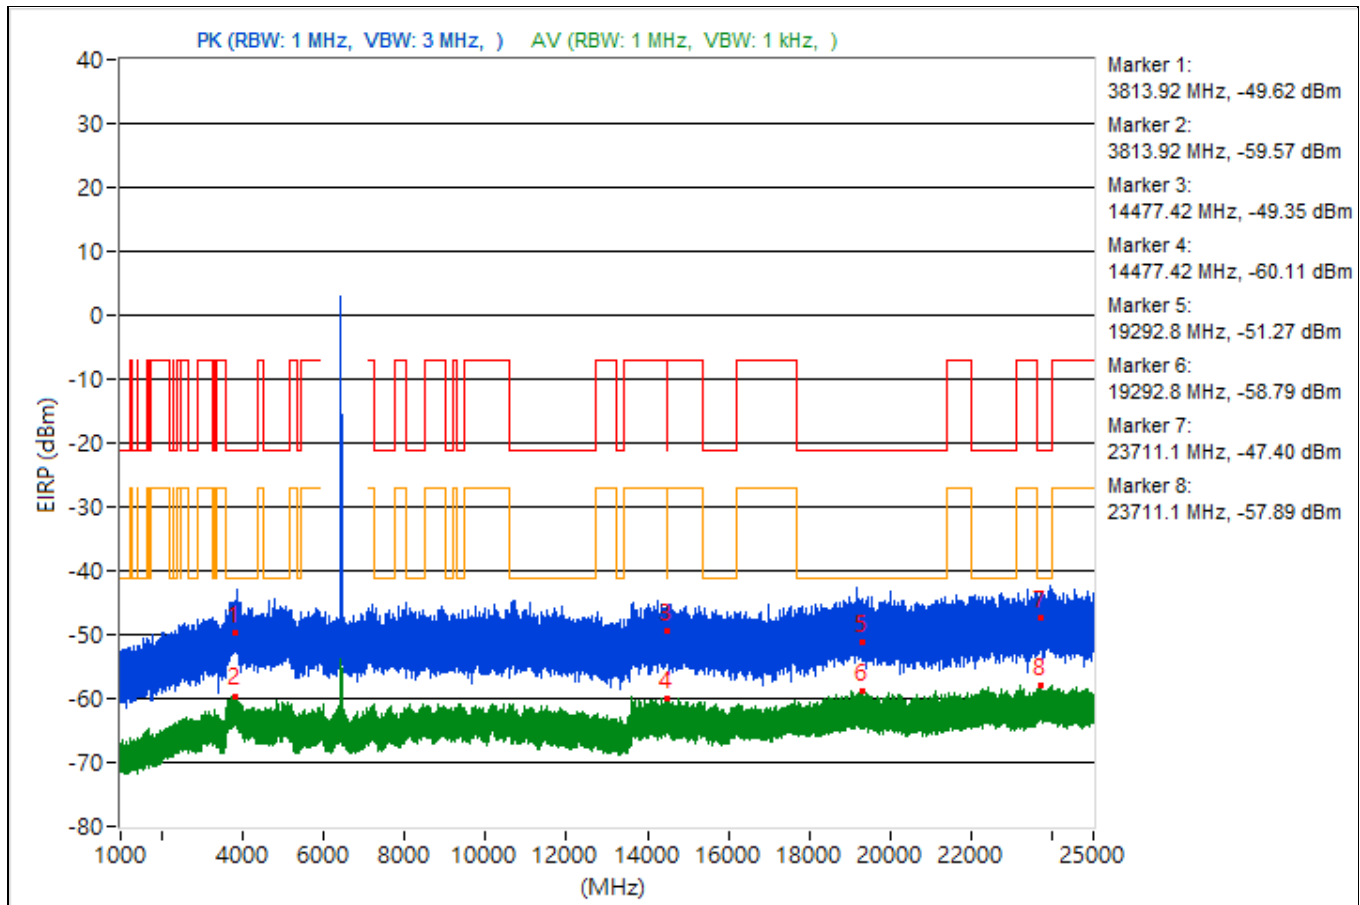


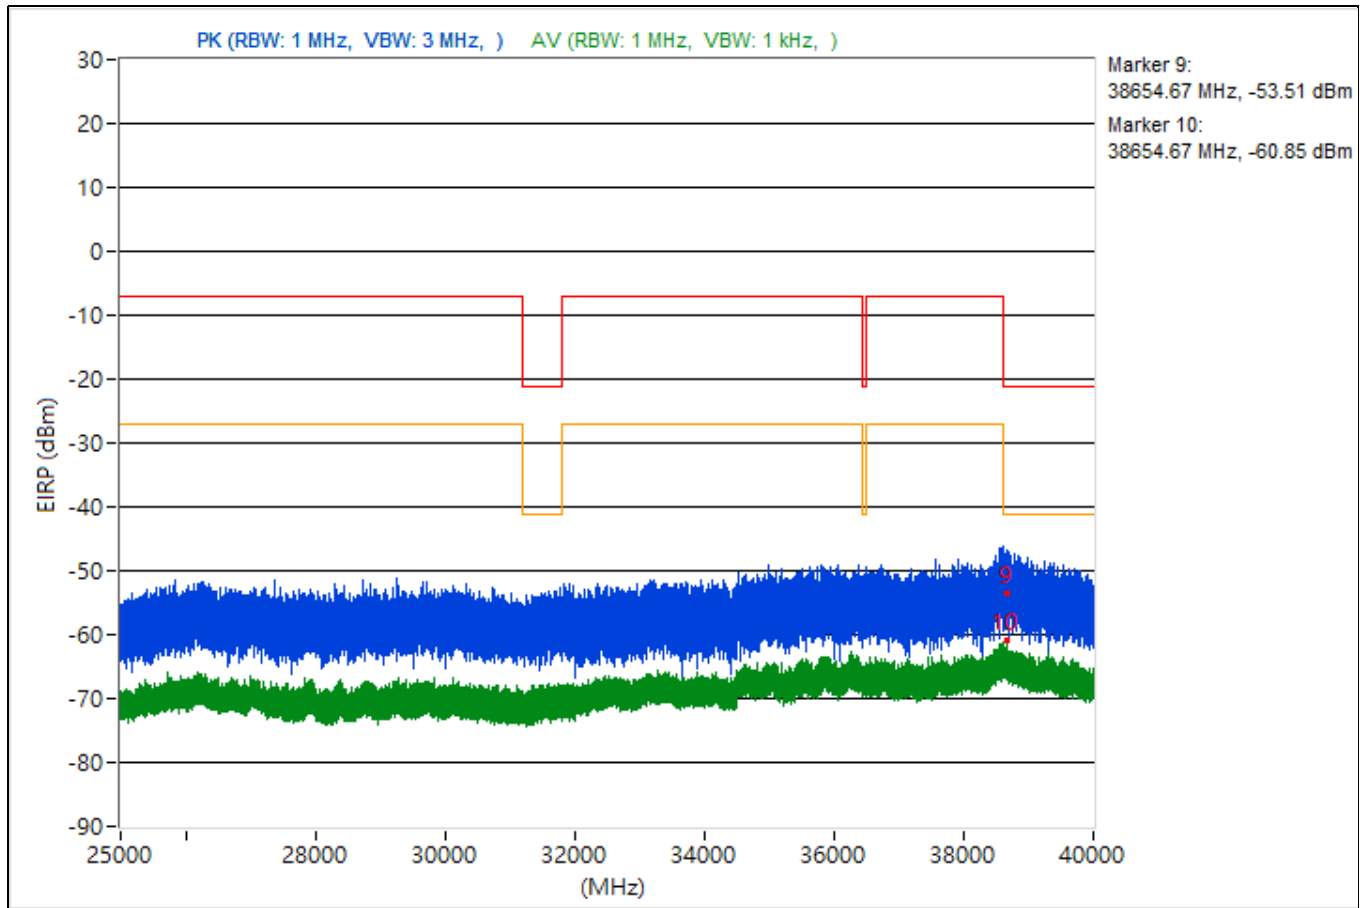


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3720.43	46.22 PK	74	-27.78	-53.96	4.92	-49.04
2	3720.43	36.63 AV	54	-17.37	-63.55	4.92	-58.63
3	14476.09	44.93 PK	74	-29.07	-55.25	4.92	-50.33
4	14476.09	34.8 AV	54	-19.2	-65.38	4.92	-60.46
5	19405.3	46.12 PK	74	-27.88	-54.06	4.92	-49.14
6	19405.3	36.45 AV	54	-17.55	-63.73	4.92	-58.81
7	22195.4	48.45 PK	74	-25.55	-51.73	4.92	-46.81
8	22195.4	37.49 AV	54	-16.51	-62.69	4.92	-57.77
9	38642.67	45.82 PK	74	-28.18	-54.36	4.92	-49.44
10	38642.67	33.78 AV	54	-20.22	-66.4	4.92	-61.48

Note: Margin value = Emission Level - Limit value

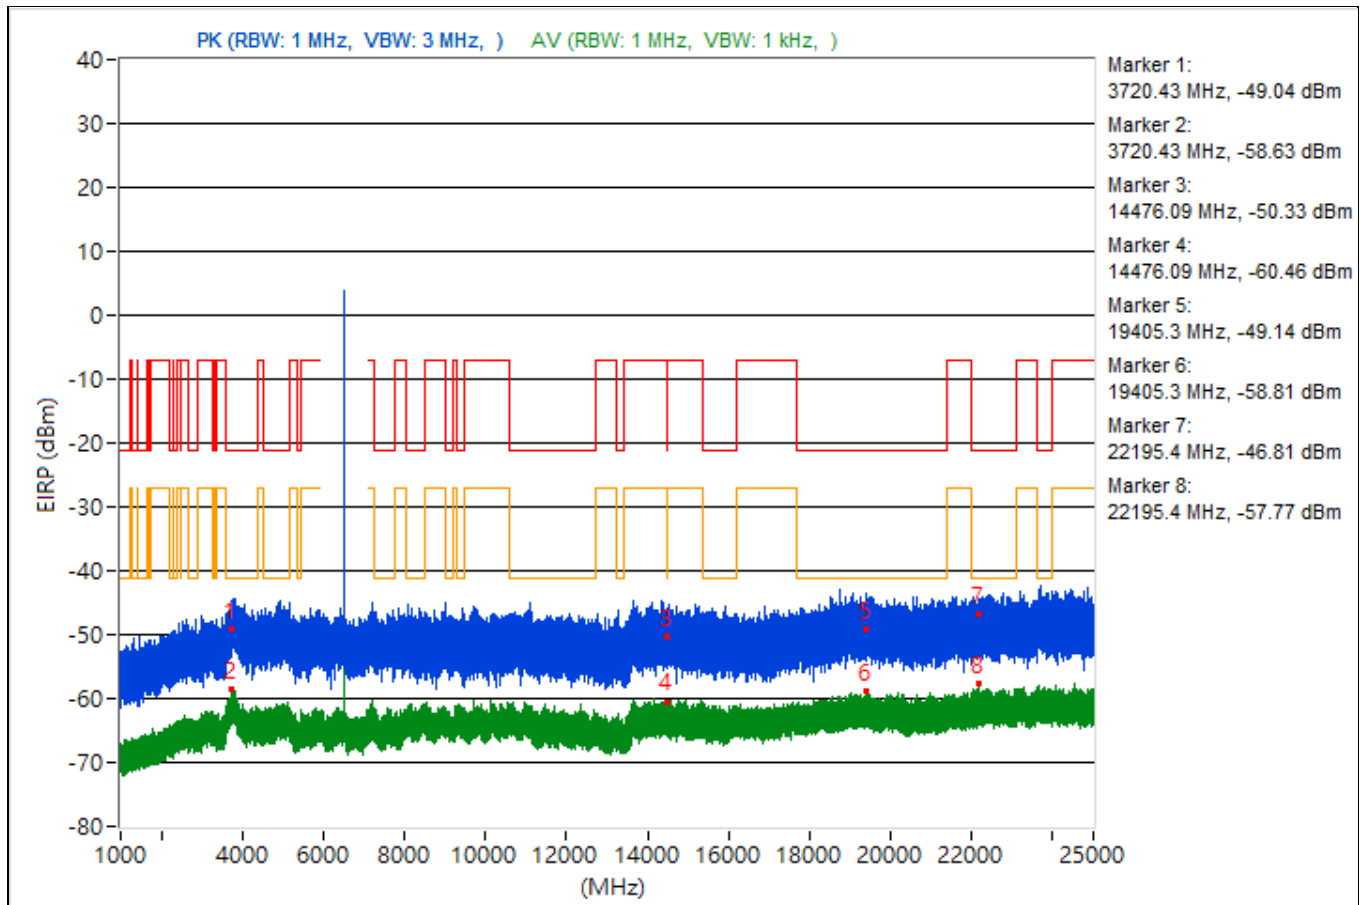


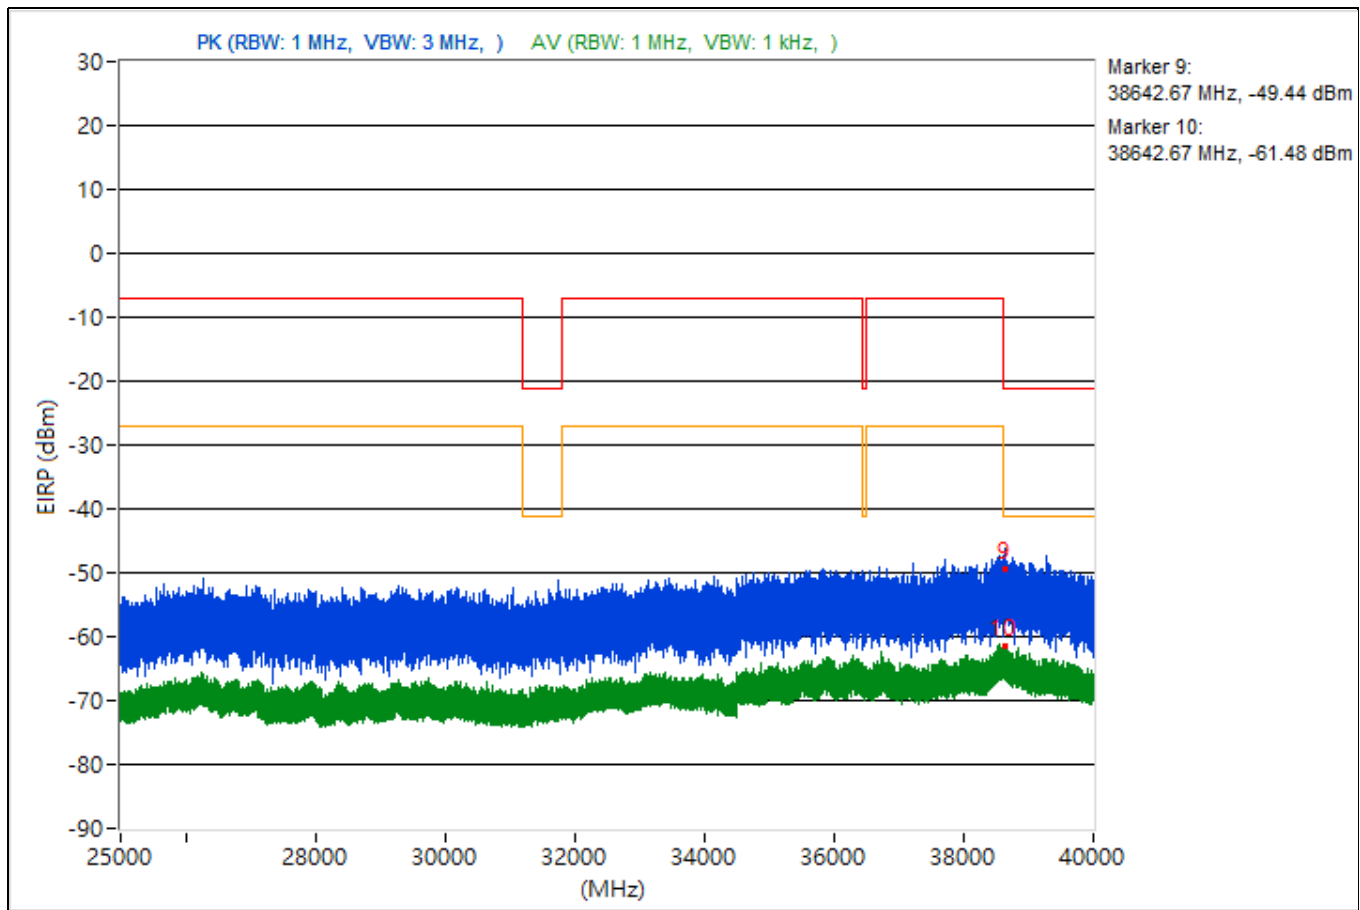


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3849.62	44.72 PK	74	-29.28	-55.46	4.92	-50.54
2	3849.62	36.3 AV	54	-17.7	-63.88	4.92	-58.96
3	14476.8	41.57 PK	74	-32.43	-58.61	4.92	-53.69
4	14476.8	35.27 AV	54	-18.73	-64.91	4.92	-59.99
5	19222.8	45.94 PK	74	-28.06	-54.24	4.92	-49.32
6	19222.8	36.6 AV	54	-17.4	-63.58	4.92	-58.66
7	23758.8	45.67 PK	74	-28.33	-54.51	4.92	-49.59
8	23758.8	37.17 AV	54	-16.83	-63.01	4.92	-58.09
9	38626.67	41.01 PK	74	-32.99	-59.17	4.92	-54.25
10	38626.67	34.18 AV	54	-19.82	-66	4.92	-61.08

Note: Margin value = Emission Level - Limit value

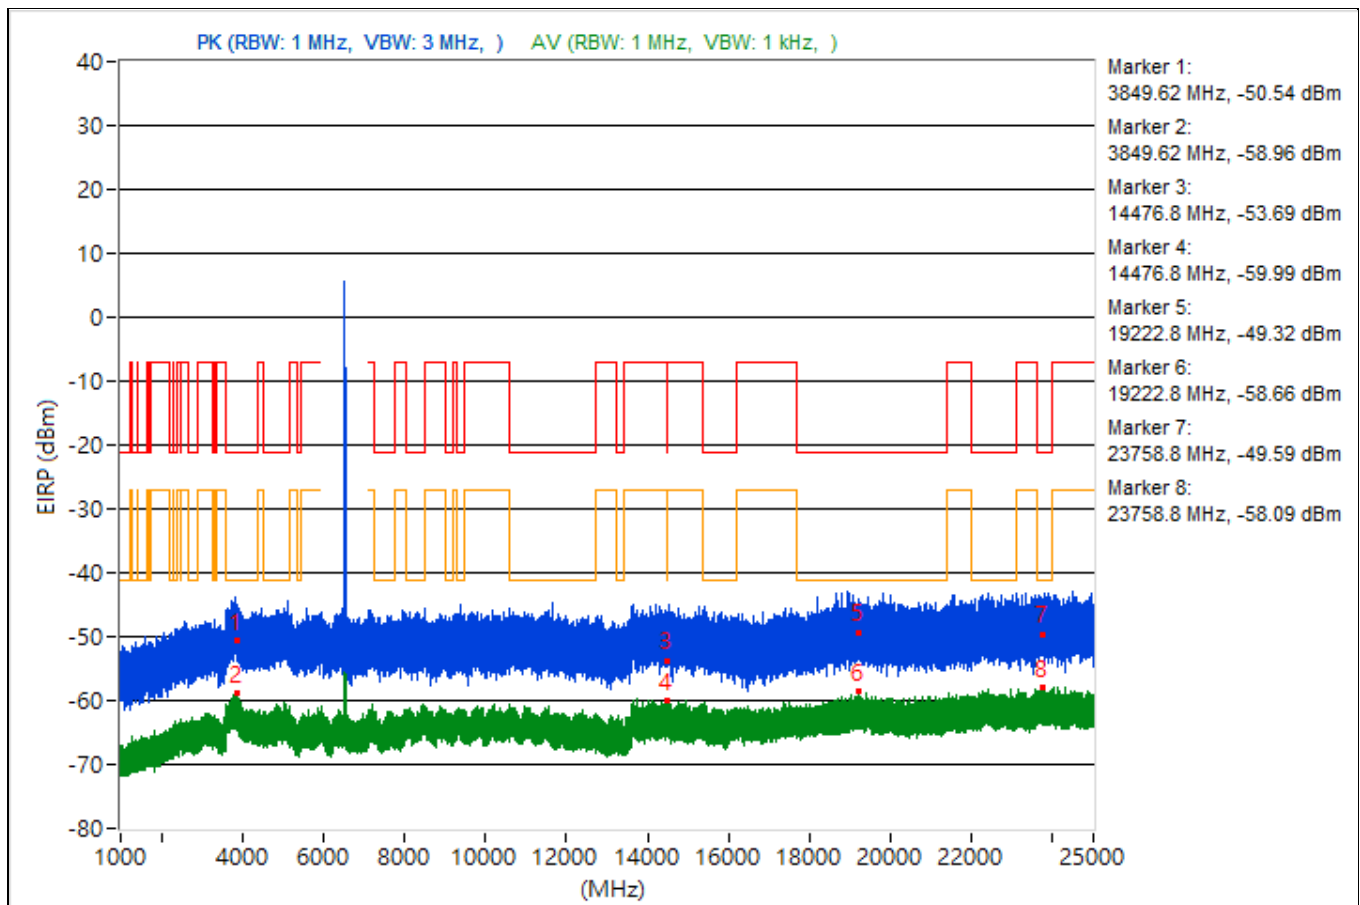


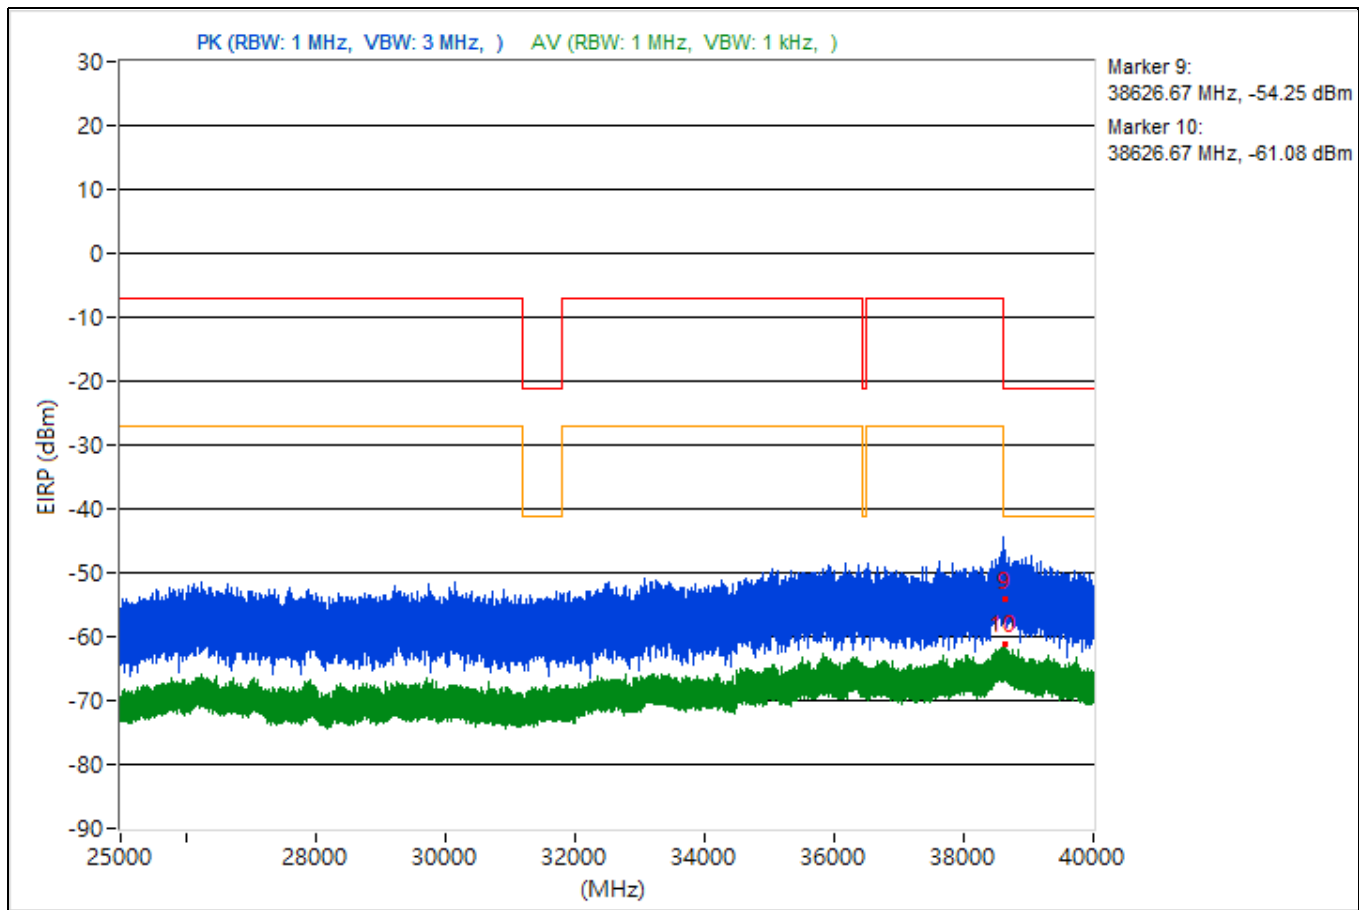


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3715.69	44.4 PK	74	-29.6	-55.78	4.92	-50.86
2	3715.69	35.66 AV	54	-18.34	-64.52	4.92	-59.6
3	14487.47	46.89 PK	74	-27.11	-53.29	4.92	-48.37
4	14487.47	35.35 AV	54	-18.65	-64.83	4.92	-59.91
5	19640.7	43.13 PK	74	-30.87	-57.05	4.92	-52.13
6	19640.7	36.78 AV	54	-17.22	-63.4	4.92	-58.48
7	22424.9	48.38 PK	74	-25.62	-51.8	4.92	-46.88
8	22424.9	37.28 AV	54	-16.72	-62.9	4.92	-57.98
9	38611.11	40.87 PK	74	-33.13	-59.31	4.92	-54.39
10	38611.11	33.39 AV	54	-20.61	-66.79	4.92	-61.87

Note: Margin value = Emission Level - Limit value

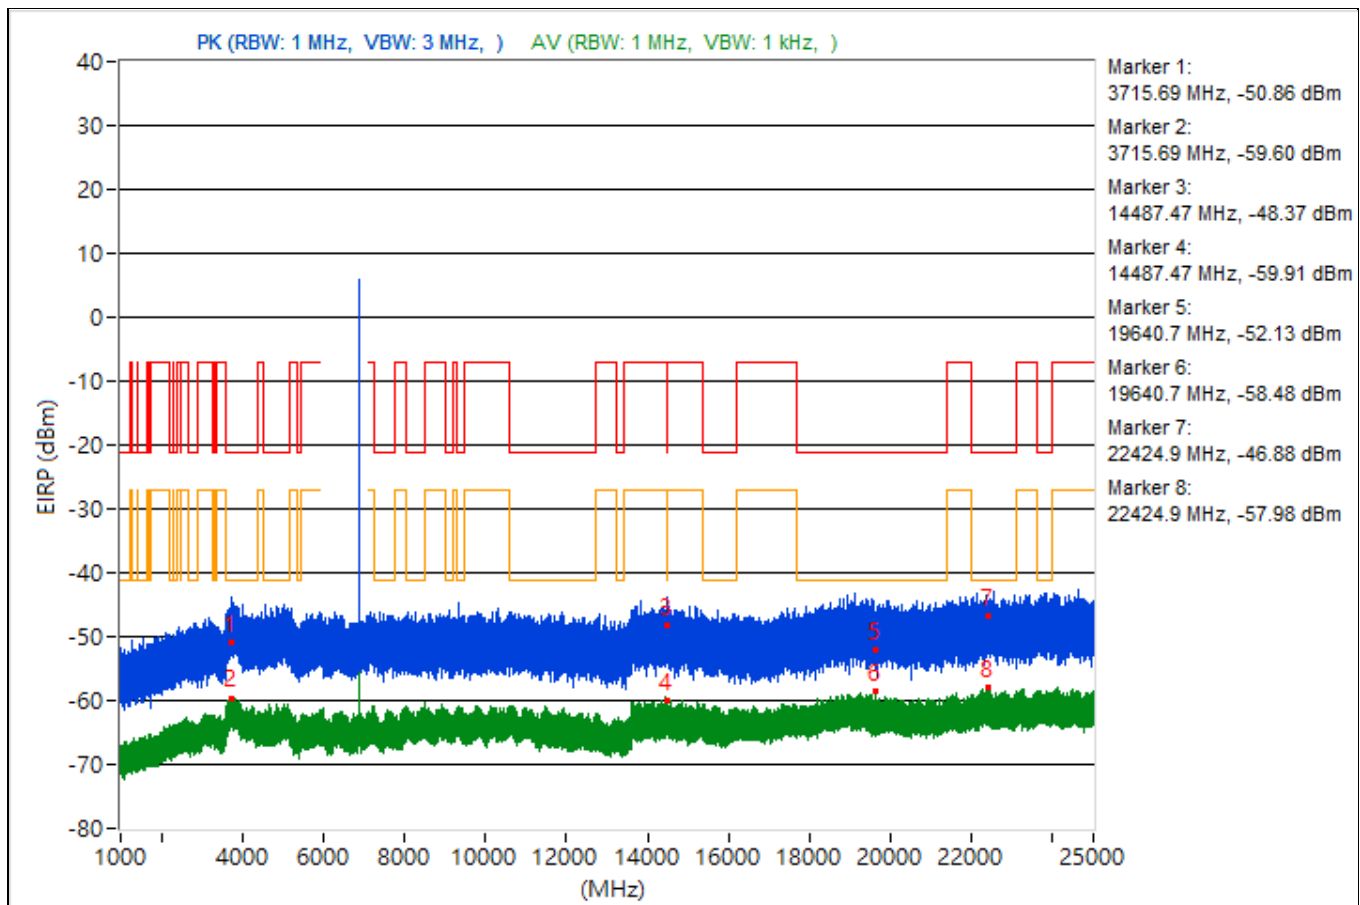


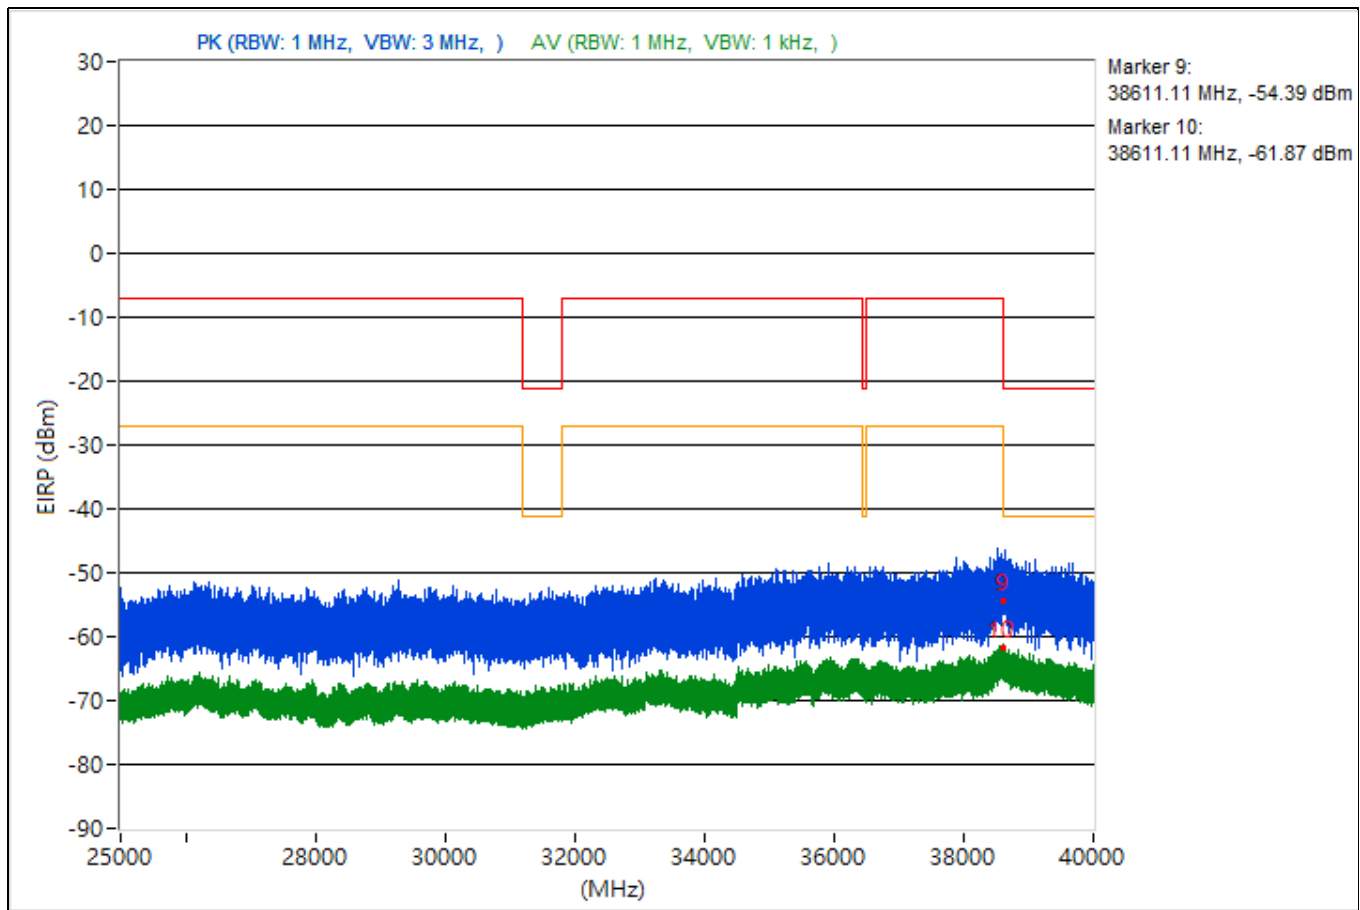


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3802.96	47.39 PK	74	-26.61	-52.79	4.92	-47.87
2	3802.96	35.92 AV	54	-18.08	-64.26	4.92	-59.34
3	7258.16	44.78 PK	74	-29.22	-55.4	4.92	-50.48
4	7258.16	34.96 AV	54	-19.04	-65.22	4.92	-60.3
5	19391.1	46.42 PK	74	-27.58	-53.76	4.92	-48.84
6	19391.1	36.38 AV	54	-17.62	-63.8	4.92	-58.88
7	23673.2	48.93 PK	74	-25.07	-51.25	4.92	-46.33
8	23673.2	37.83 AV	54	-16.17	-62.35	4.92	-57.43
9	38621.16	44.64 PK	74	-29.36	-55.54	4.92	-50.62
10	38621.16	33.77 AV	54	-20.23	-66.41	4.92	-61.49

Note: Margin value = Emission Level - Limit value

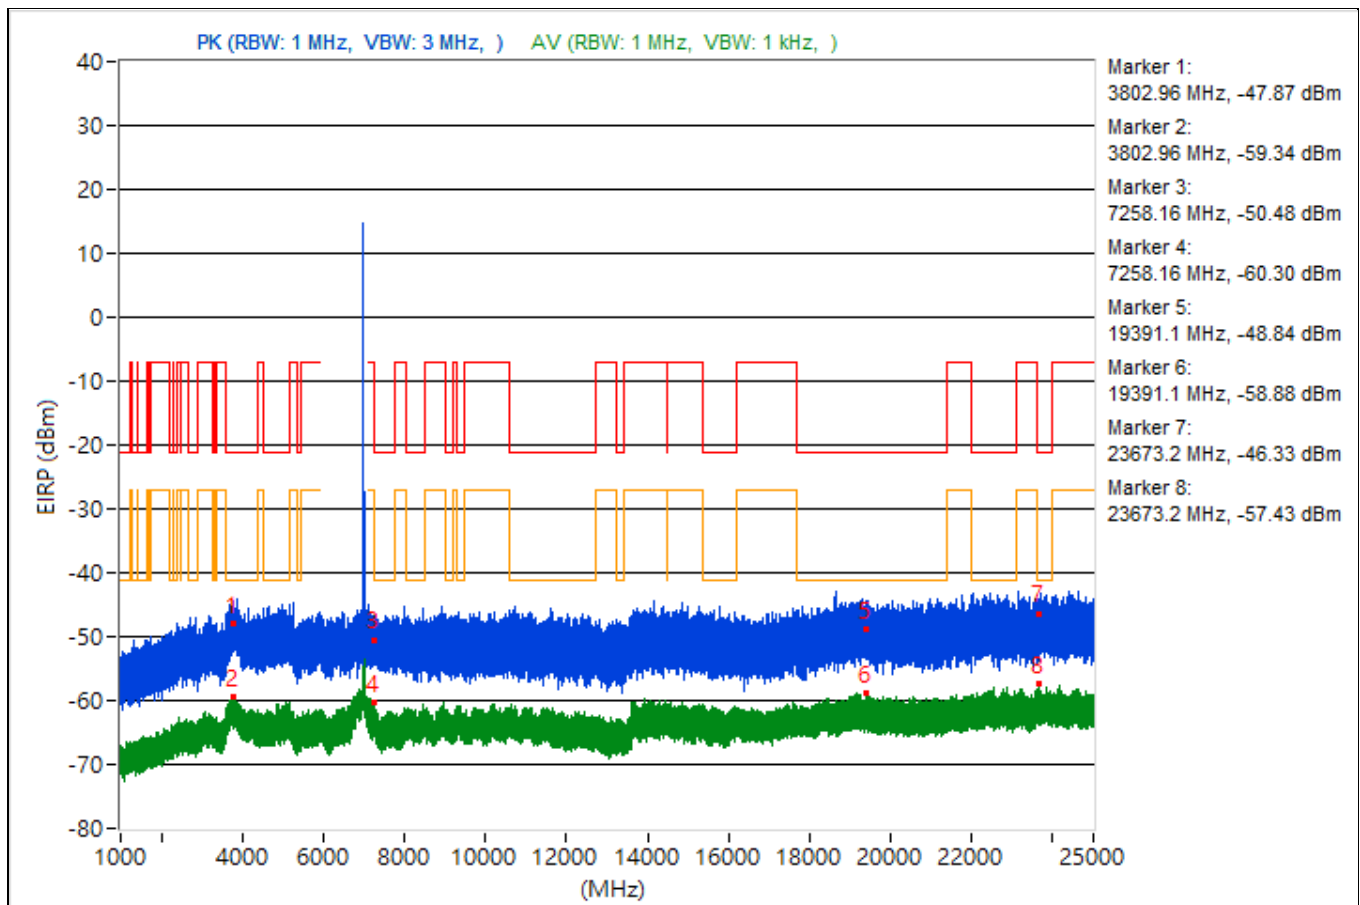


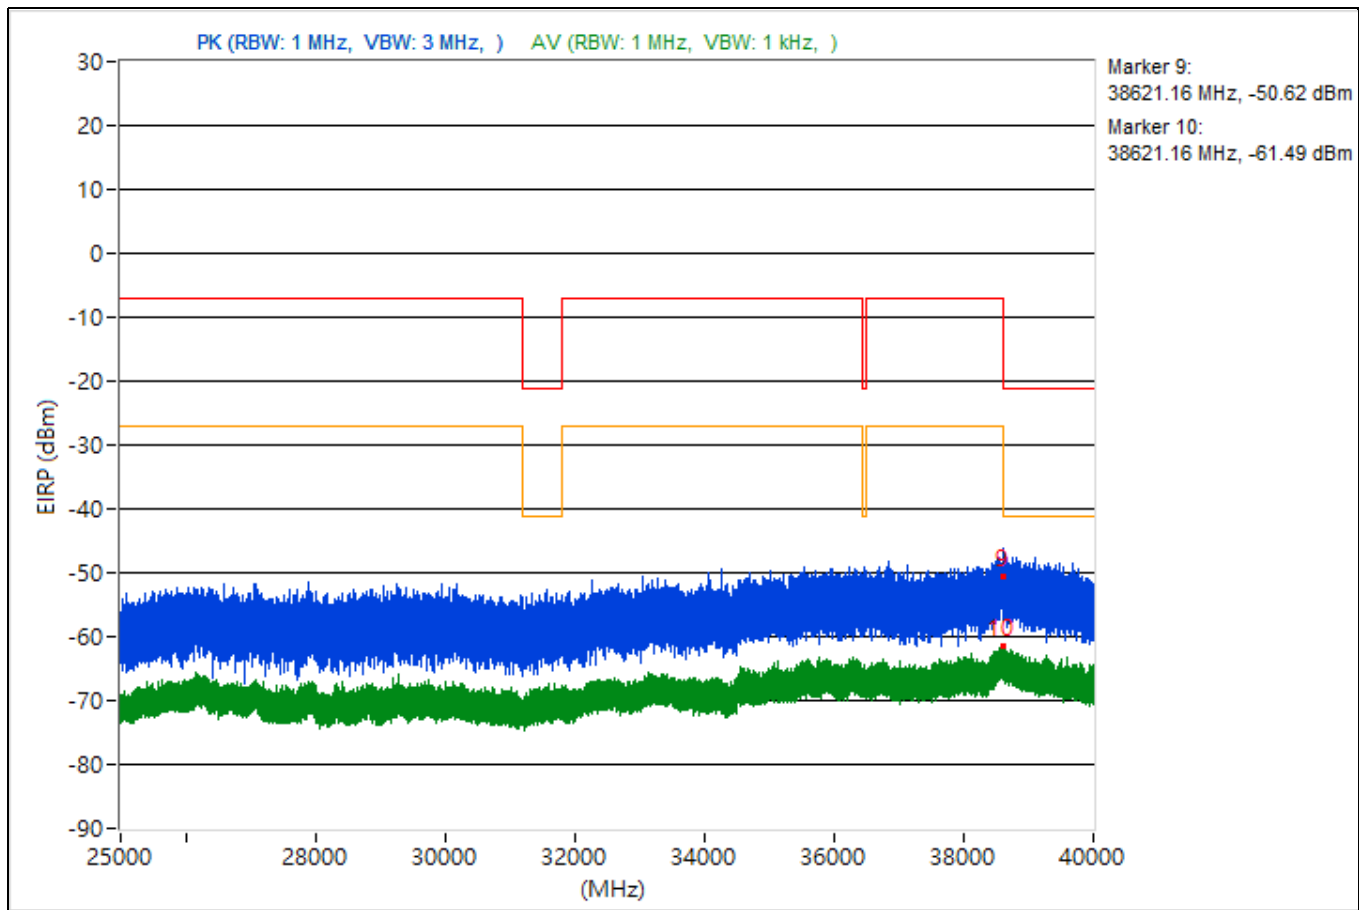


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3847.83	48.98 PK	74	-25.02	-51.2	4.92	-46.28
2	3847.83	36.32 AV	54	-17.68	-63.86	4.92	-58.94
3	9343.64	46.16 PK	74	-27.84	-54.02	4.92	-49.1
4	9343.64	35.14 AV	54	-18.86	-65.04	4.92	-60.12
5	19192.9	46.96 PK	74	-27.04	-53.22	4.92	-48.3
6	19192.9	36.72 AV	54	-17.28	-63.46	4.92	-58.54
7	22780.3	46.75 PK	74	-27.25	-53.43	4.92	-48.51
8	22780.3	37.42 AV	54	-16.58	-62.76	4.92	-57.84
9	38611.56	38.32 PK	74	-35.68	-61.86	4.92	-56.94
10	38611.56	33.79 AV	54	-20.21	-66.39	4.92	-61.47

Note: Margin value = Emission Level - Limit value

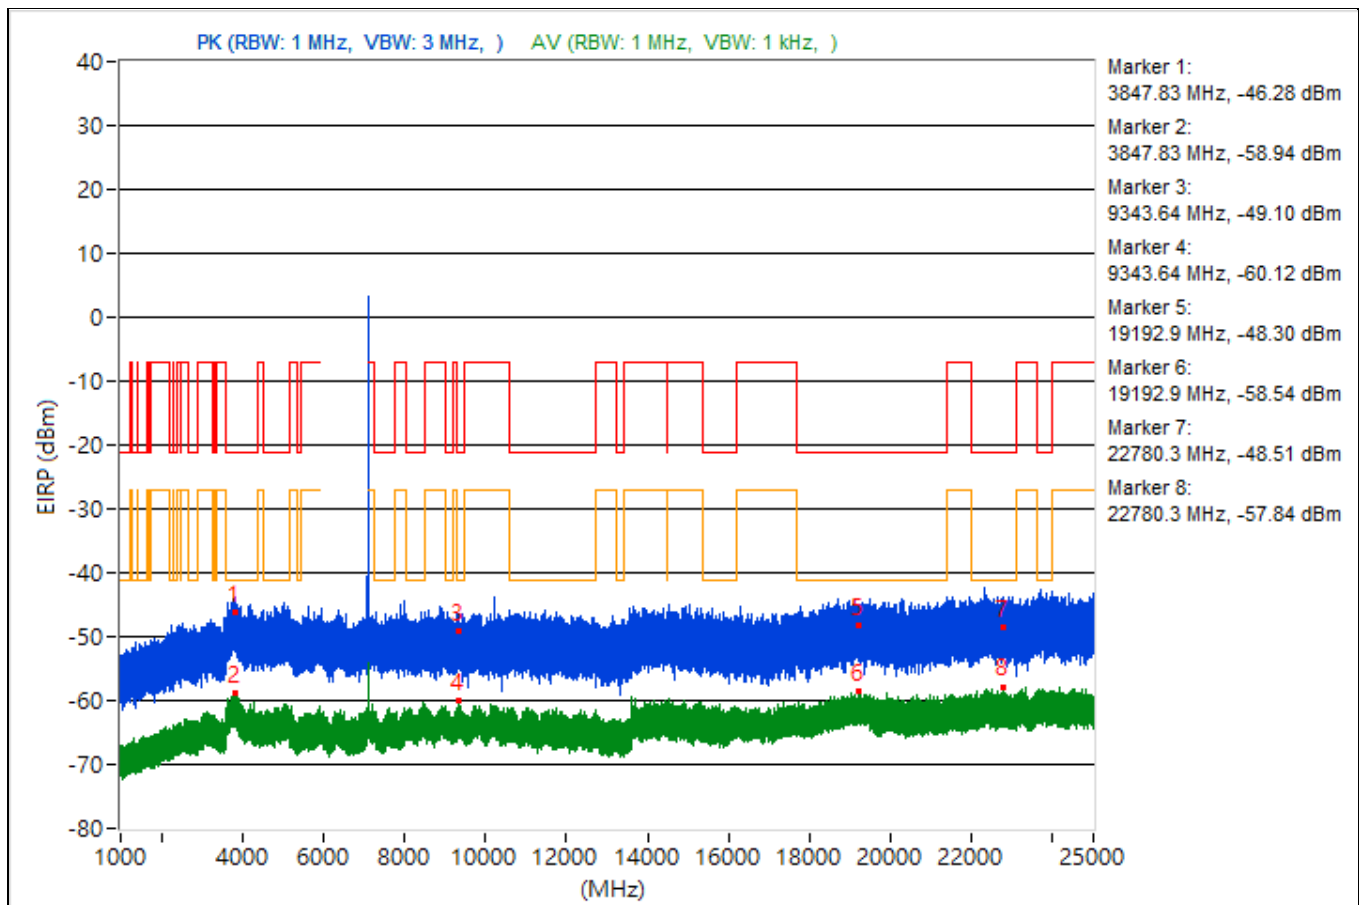


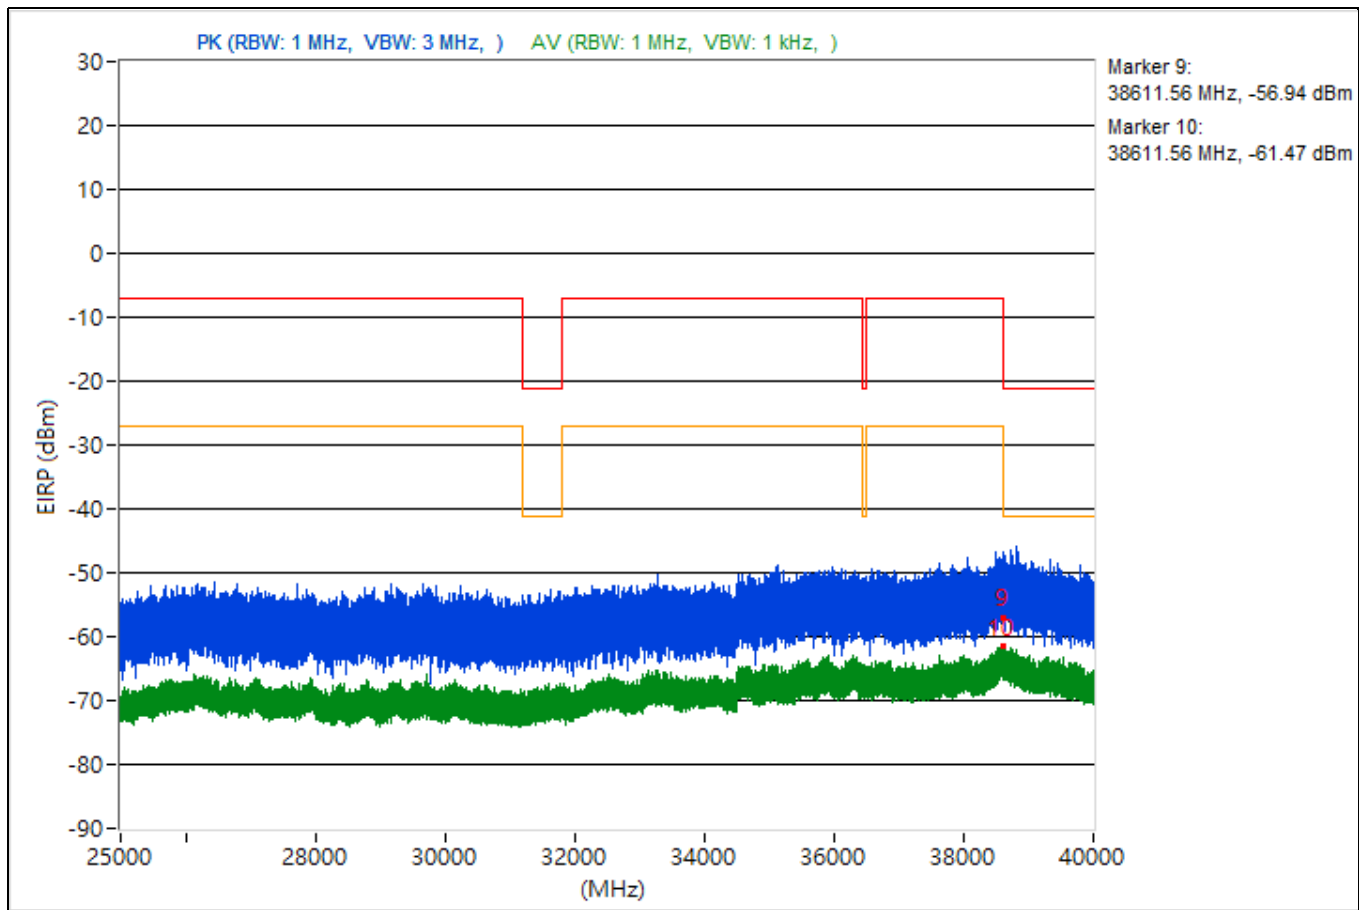


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3835.93	44.07 PK	74	-29.93	-56.11	4.92	-51.19
2	3835.93	36.09 AV	54	-17.91	-64.09	4.92	-59.17
3	15359.2	42.89 PK	74	-31.11	-57.29	4.92	-52.37
4	15359.2	34.66 AV	54	-19.34	-65.52	4.92	-60.6
5	19994.2	45.23 PK	74	-28.77	-54.95	4.92	-50.03
6	19994.2	36.29 AV	54	-17.71	-63.89	4.92	-58.97
7	23852.4	48.06 PK	74	-25.94	-52.12	4.92	-47.2
8	23852.4	37.24 AV	54	-16.76	-62.94	4.92	-58.02
9	38628.8	40.43 PK	74	-33.57	-59.75	4.92	-54.83
10	38628.8	33.47 AV	54	-20.53	-66.71	4.92	-61.79

Note: Margin value = Emission Level - Limit value

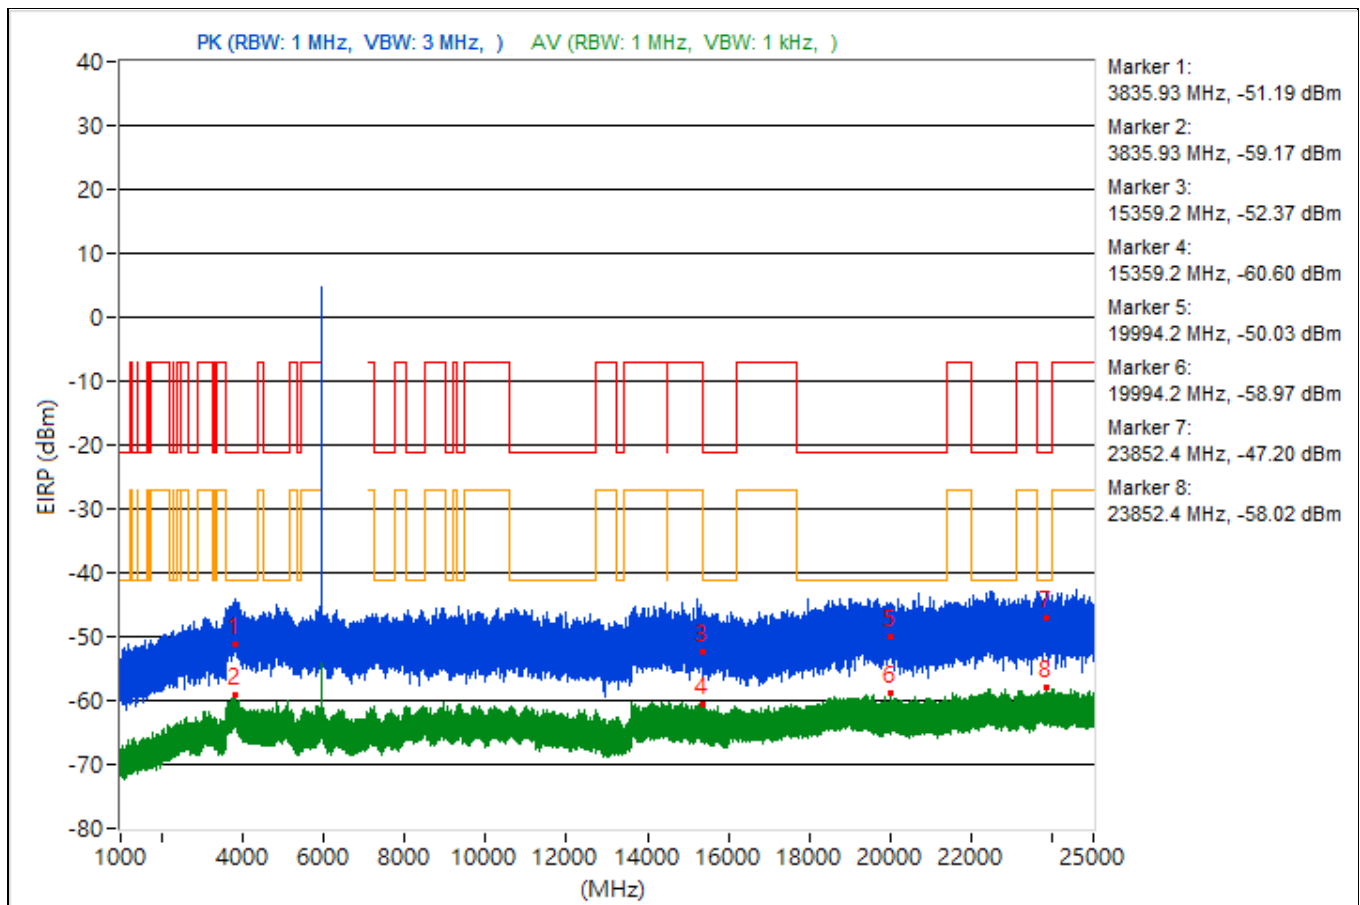


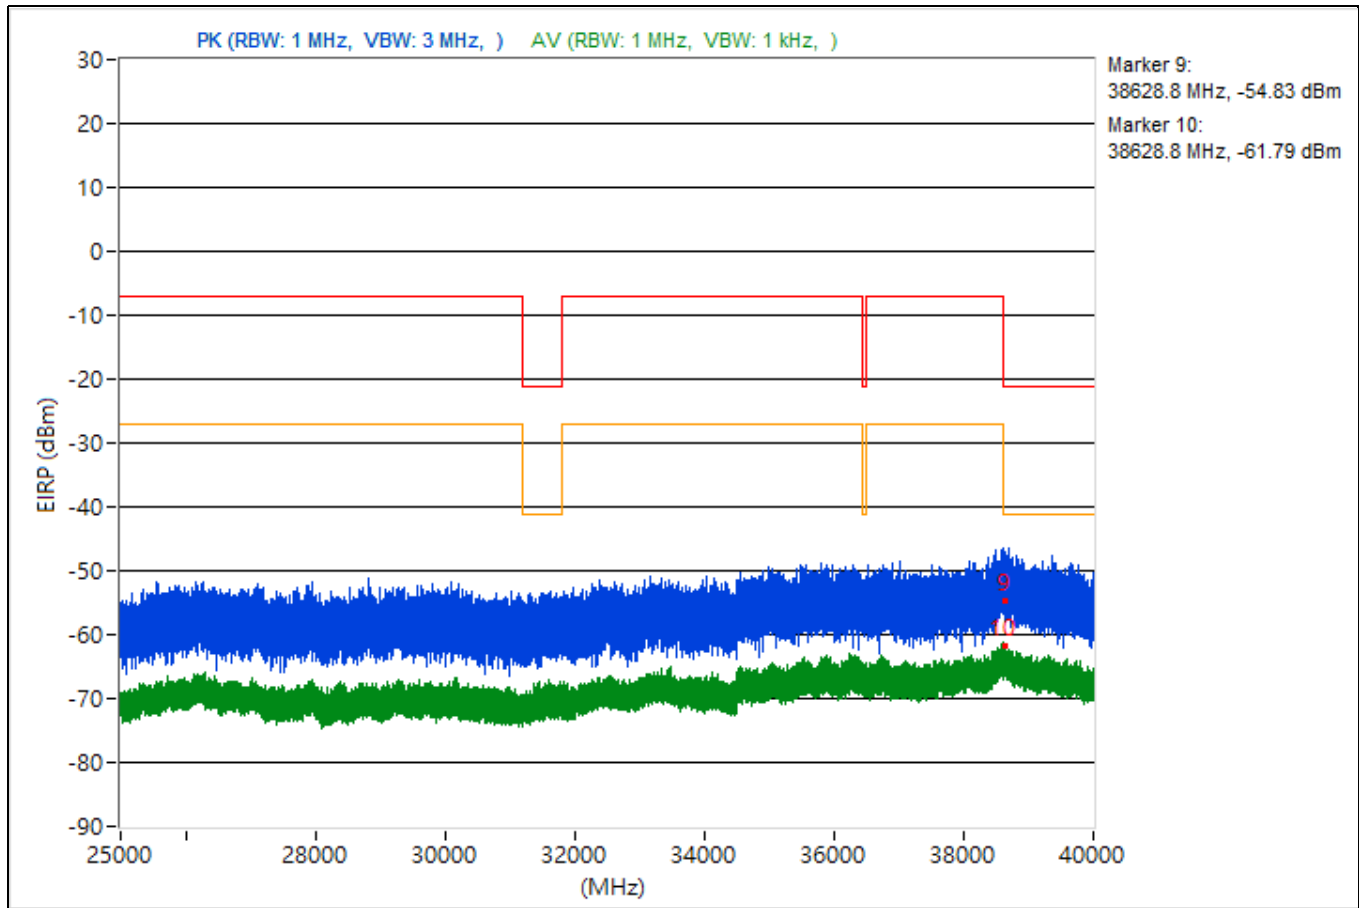


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3742.29	46.34 PK	74	-27.66	-53.84	4.92	-48.92
2	3742.29	36.29 AV	54	-17.71	-63.89	4.92	-58.97
3	9036	44.74 PK	74	-29.26	-55.44	4.92	-50.52
4	9036	34.54 AV	54	-19.46	-65.64	4.92	-60.72
5	19097.6	47.51 PK	74	-26.49	-52.67	4.92	-47.75
6	19097.6	36.42 AV	54	-17.58	-63.76	4.92	-58.84
7	22705.8	46.21 PK	74	-27.79	-53.97	4.92	-49.05
8	22705.8	37.63 AV	54	-16.37	-62.55	4.92	-57.63
9	38607.47	40.49 PK	74	-33.51	-59.69	4.92	-54.77
10	38607.47	33.64 AV	54	-20.36	-66.54	4.92	-61.62

Note: Margin value = Emission Level - Limit value

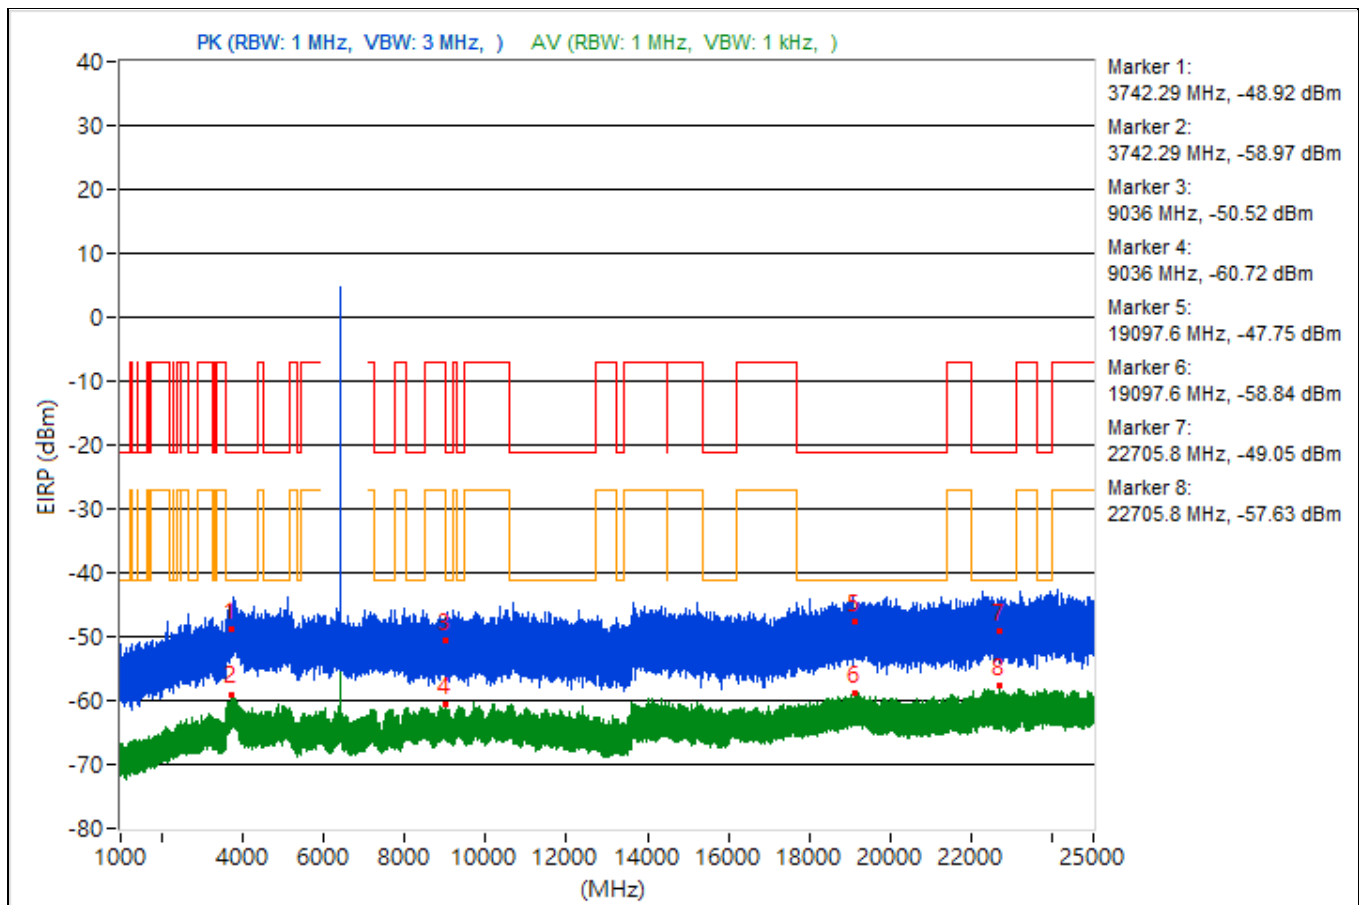


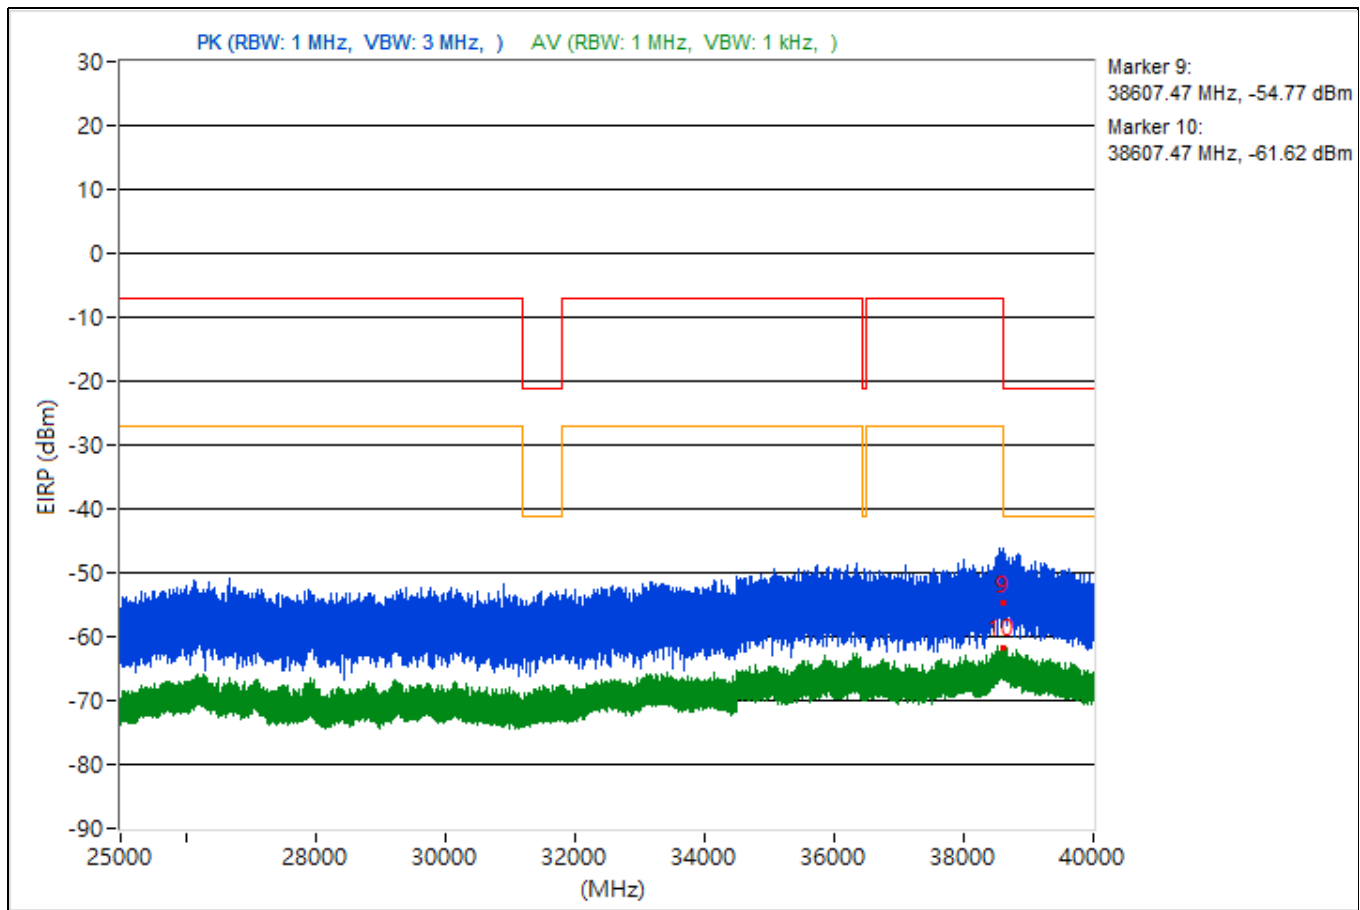


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3745.32	45.07 PK	74	-28.93	-55.11	4.92	-50.19
2	3745.32	35.53 AV	54	-18.47	-64.65	4.92	-59.73
3	14498.76	43.42 PK	74	-30.58	-56.76	4.92	-51.84
4	14498.76	34.85 AV	54	-19.15	-65.33	4.92	-60.41
5	19339.4	44.02 PK	74	-29.98	-56.16	4.92	-51.24
6	19339.4	36.55 AV	54	-17.45	-63.63	4.92	-58.71
7	23637.2	47.81 PK	74	-26.19	-52.37	4.92	-47.45
8	23637.2	37.06 AV	54	-16.94	-63.12	4.92	-58.2
9	38609.96	38.51 PK	74	-35.49	-61.67	4.92	-56.75
10	38609.96	34.34 AV	54	-19.66	-65.84	4.92	-60.92

Note: Margin value = Emission Level - Limit value

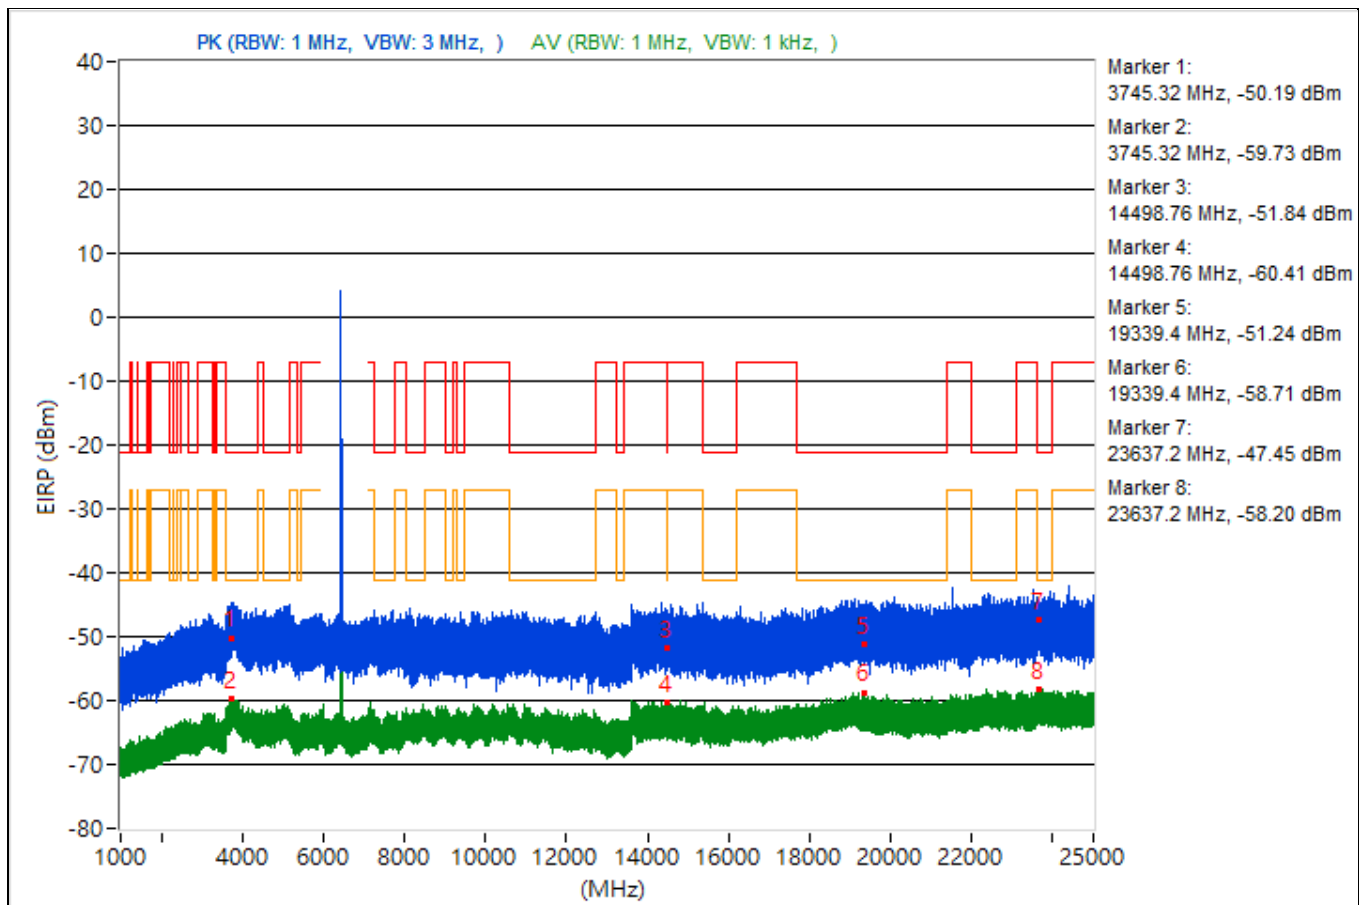


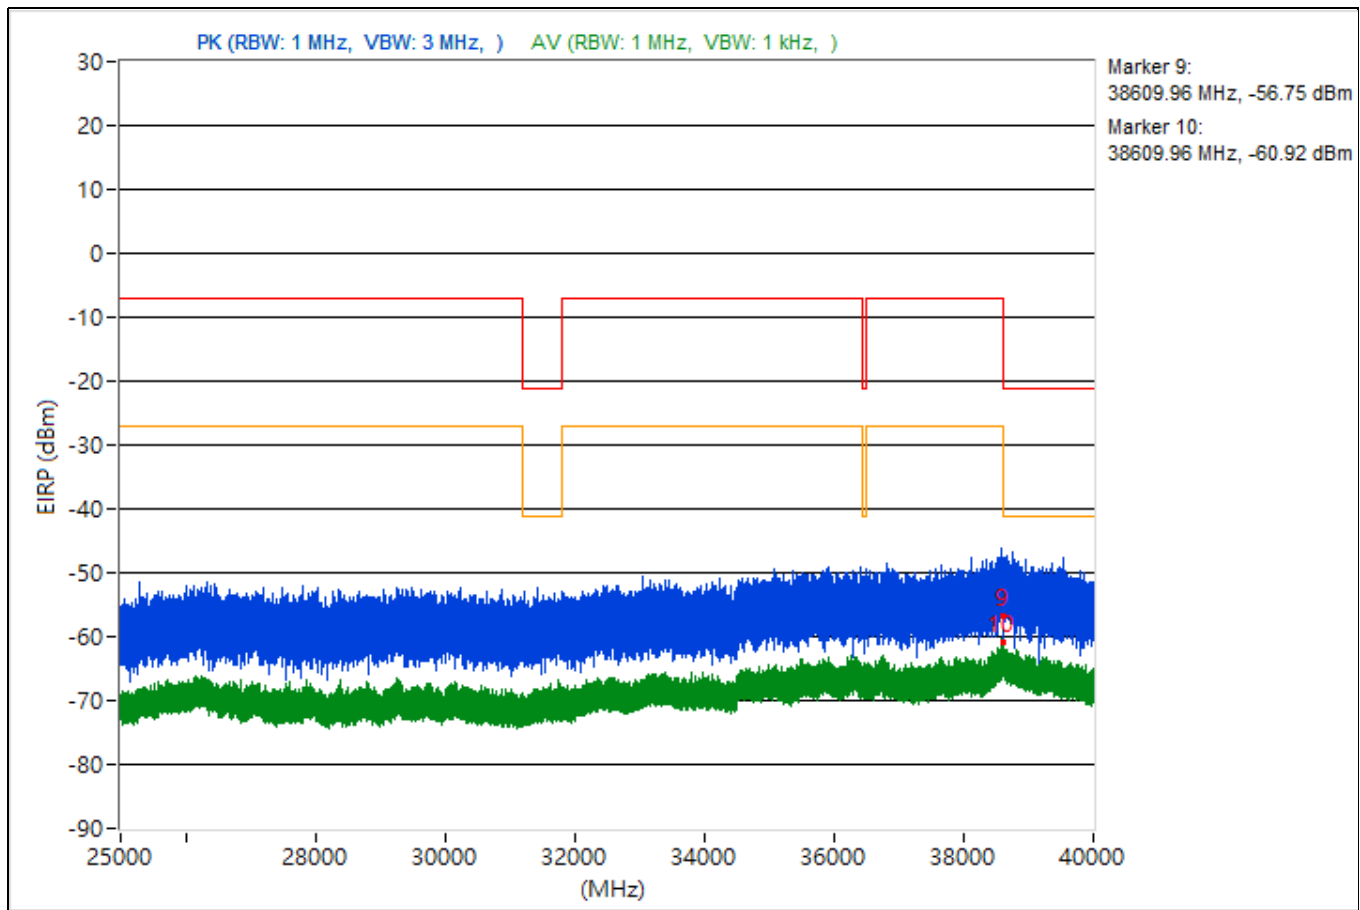


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3810.03	47.39 PK	74	-26.61	-52.79	4.92	-47.87
2	3810.03	35.72 AV	54	-18.28	-64.46	4.92	-59.54
3	8475.2	44.64 PK	74	-29.36	-55.54	4.92	-50.62
4	8475.2	34.89 AV	54	-19.11	-65.29	4.92	-60.37
5	19205.2	43.32 PK	74	-30.68	-56.86	4.92	-51.94
6	19205.2	36.82 AV	54	-17.18	-63.36	4.92	-58.44
7	23710.2	46.89 PK	74	-27.11	-53.29	4.92	-48.37
8	23710.2	36.9 AV	54	-17.1	-63.28	4.92	-58.36
9	38647.29	41.46 PK	74	-32.54	-58.72	4.92	-53.8
10	38647.29	33.2 AV	54	-20.8	-66.98	4.92	-62.06

Note: Margin value = Emission Level - Limit value

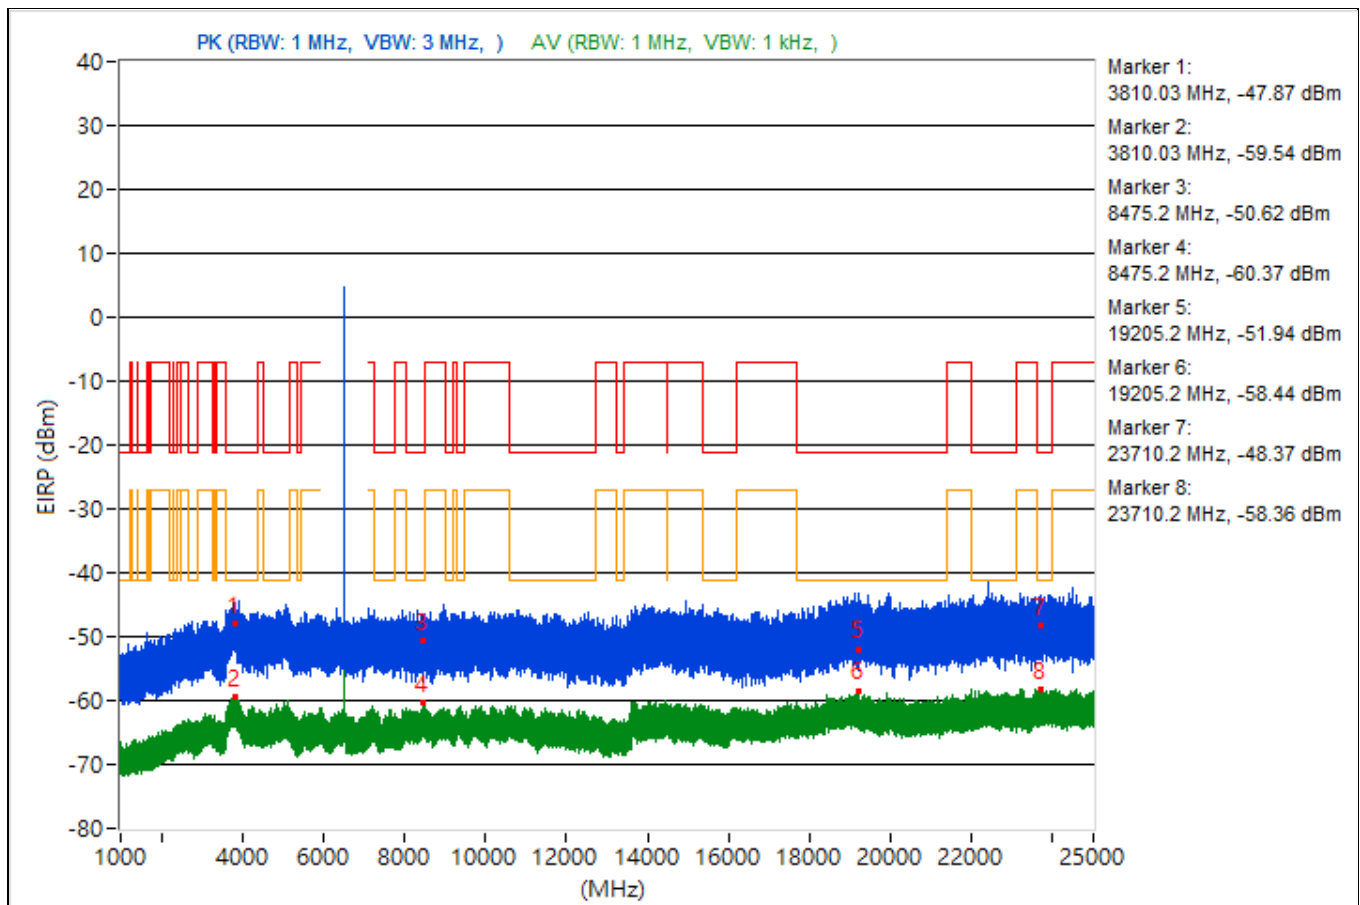


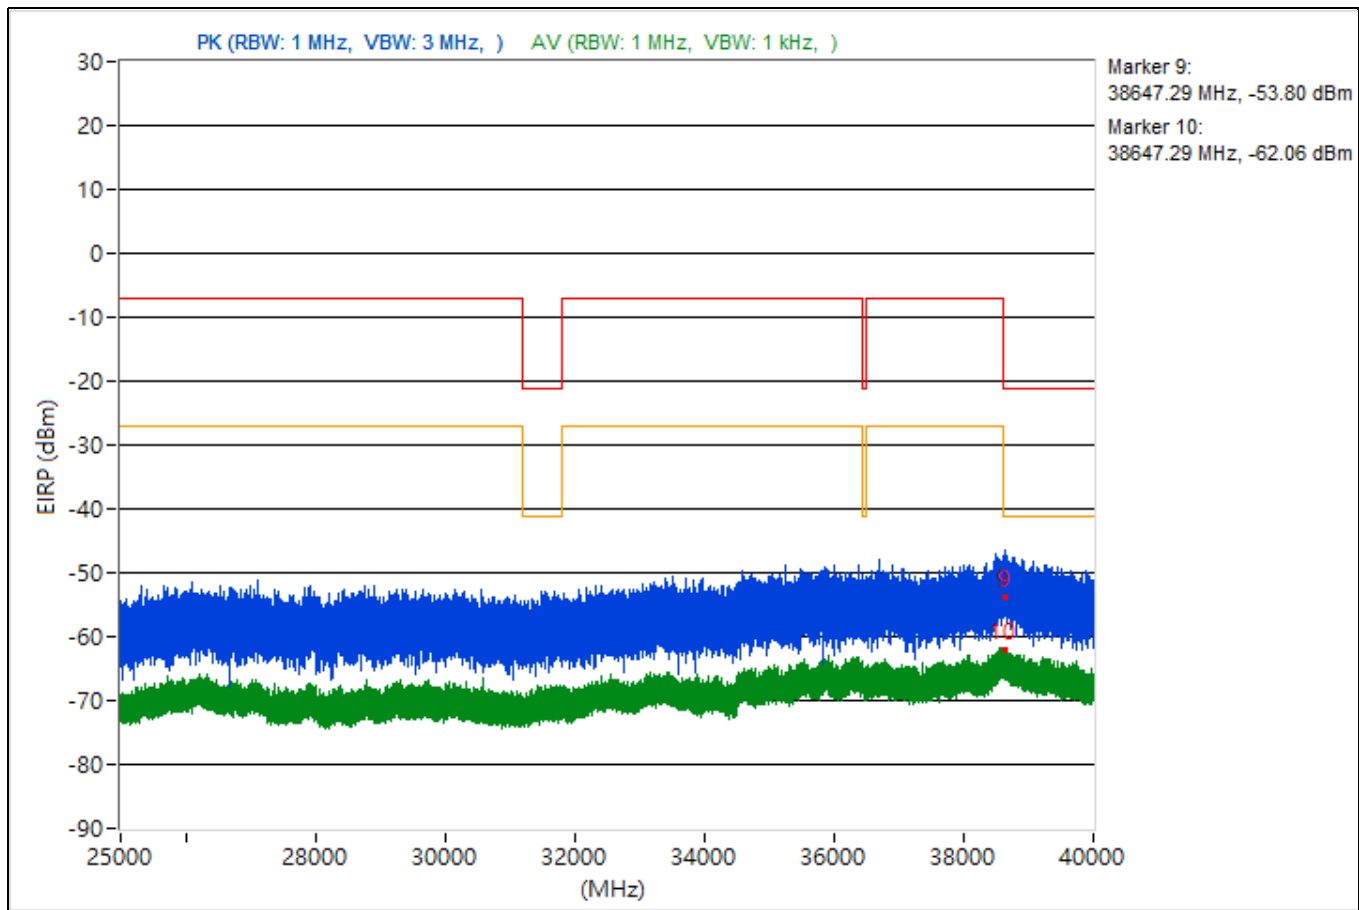


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3865.57	46.44 PK	74	-27.56	-53.74	4.92	-48.82
2	3865.57	36.06 AV	54	-17.94	-64.12	4.92	-59.2
3	8454.67	44.74 PK	74	-29.26	-55.44	4.92	-50.52
4	8454.67	34.89 AV	54	-19.11	-65.29	4.92	-60.37
5	18969.6	44.28 PK	74	-29.72	-55.9	4.92	-50.98
6	18969.6	36.41 AV	54	-17.59	-63.77	4.92	-58.85
7	23686.7	47.44 PK	74	-26.56	-52.74	4.92	-47.82
8	23686.7	37.26 AV	54	-16.74	-62.92	4.92	-58
9	38607.73	44.15 PK	74	-29.85	-56.03	4.92	-51.11
10	38607.73	33.48 AV	54	-20.52	-66.7	4.92	-61.78

Note: Margin value = Emission Level - Limit value

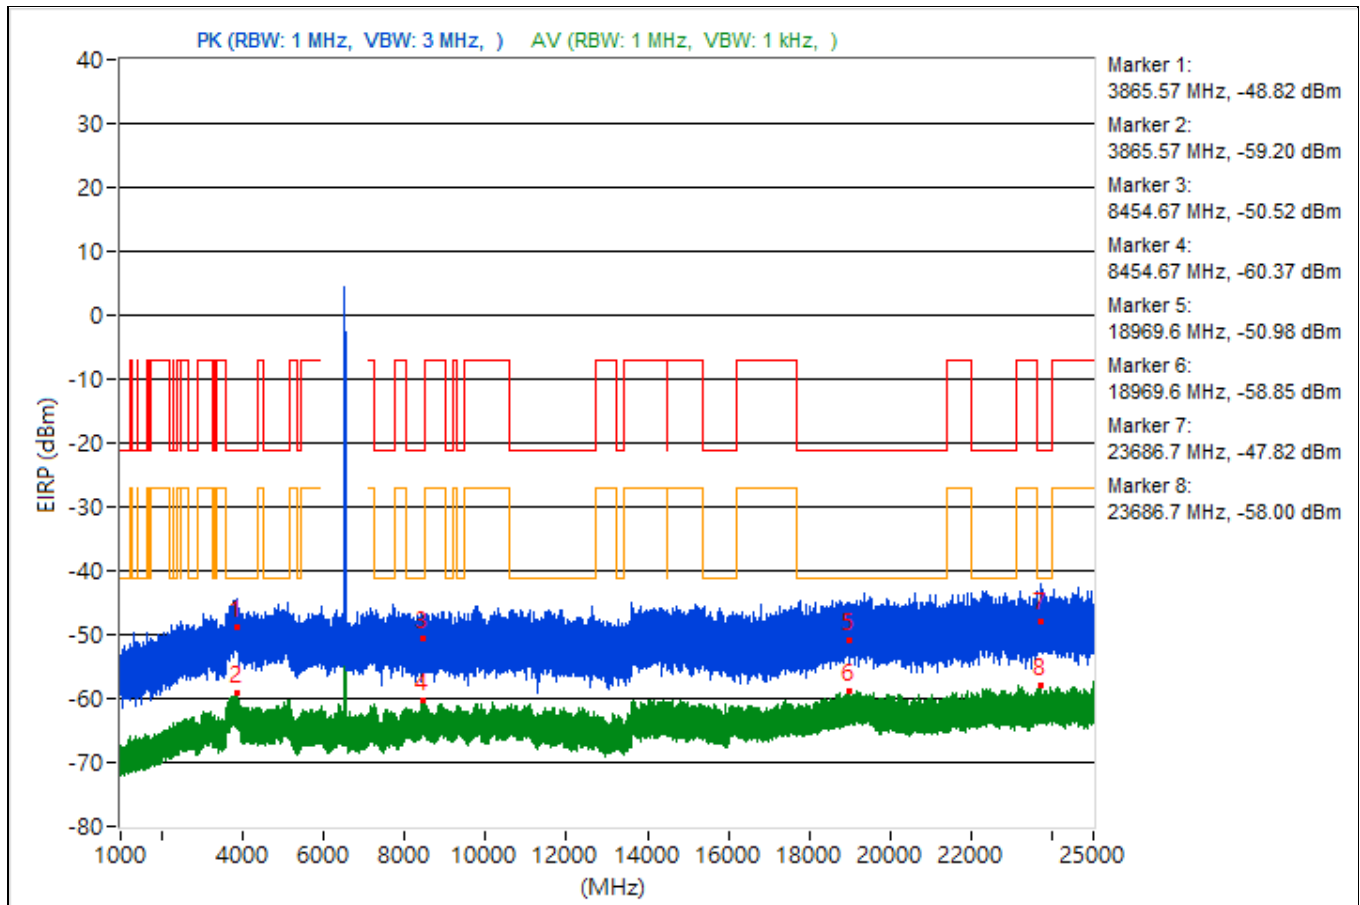


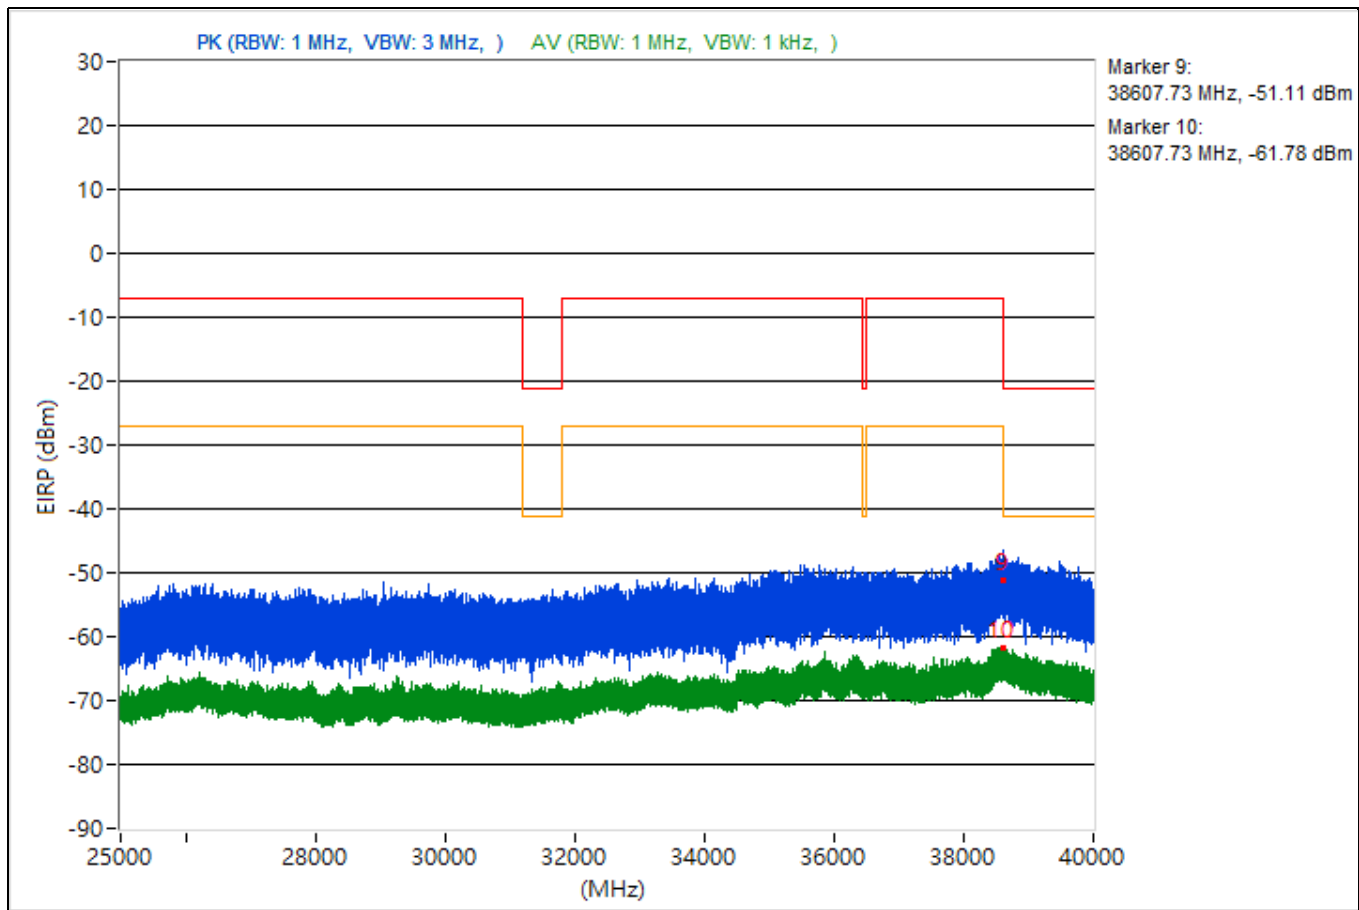


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3823.96	46.54 PK	74	-27.46	-53.64	4.92	-48.72
2	3823.96	35.9 AV	54	-18.1	-64.28	4.92	-59.36
3	9369.69	43.44 PK	74	-30.56	-56.74	4.92	-51.82
4	9369.69	34.87 AV	54	-19.13	-65.31	4.92	-60.39
5	19148	46.72 PK	74	-27.28	-53.46	4.92	-48.54
6	19148	36.24 AV	54	-17.76	-63.94	4.92	-59.02
7	23638	43.9 PK	74	-30.1	-56.28	4.92	-51.36
8	23638	37.24 AV	54	-16.76	-62.94	4.92	-58.02
9	38664.27	41.69 PK	74	-32.31	-58.49	4.92	-53.57
10	38664.27	33.4 AV	54	-20.6	-66.78	4.92	-61.86

Note: Margin value = Emission Level - Limit value

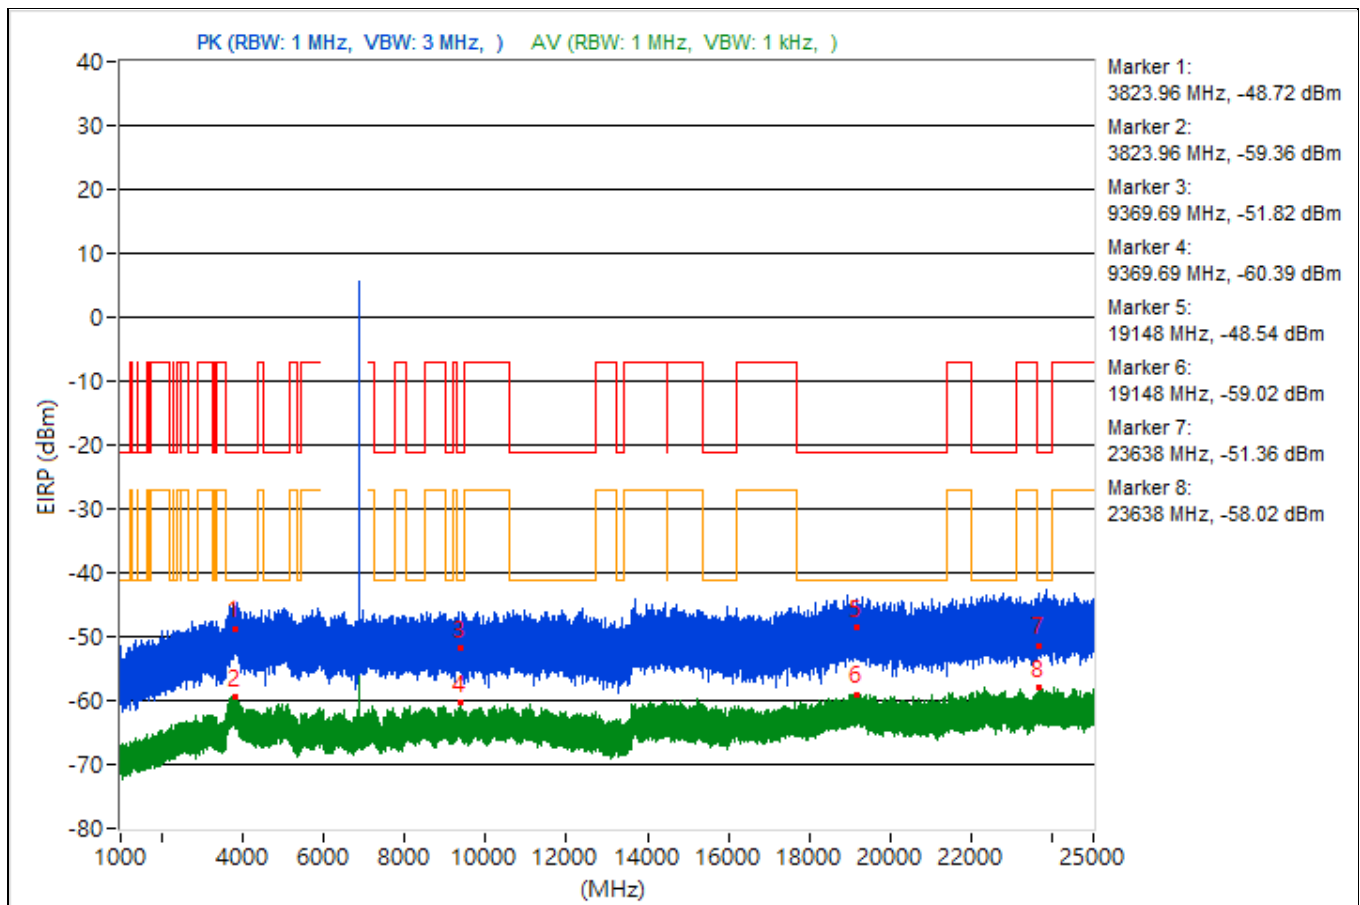


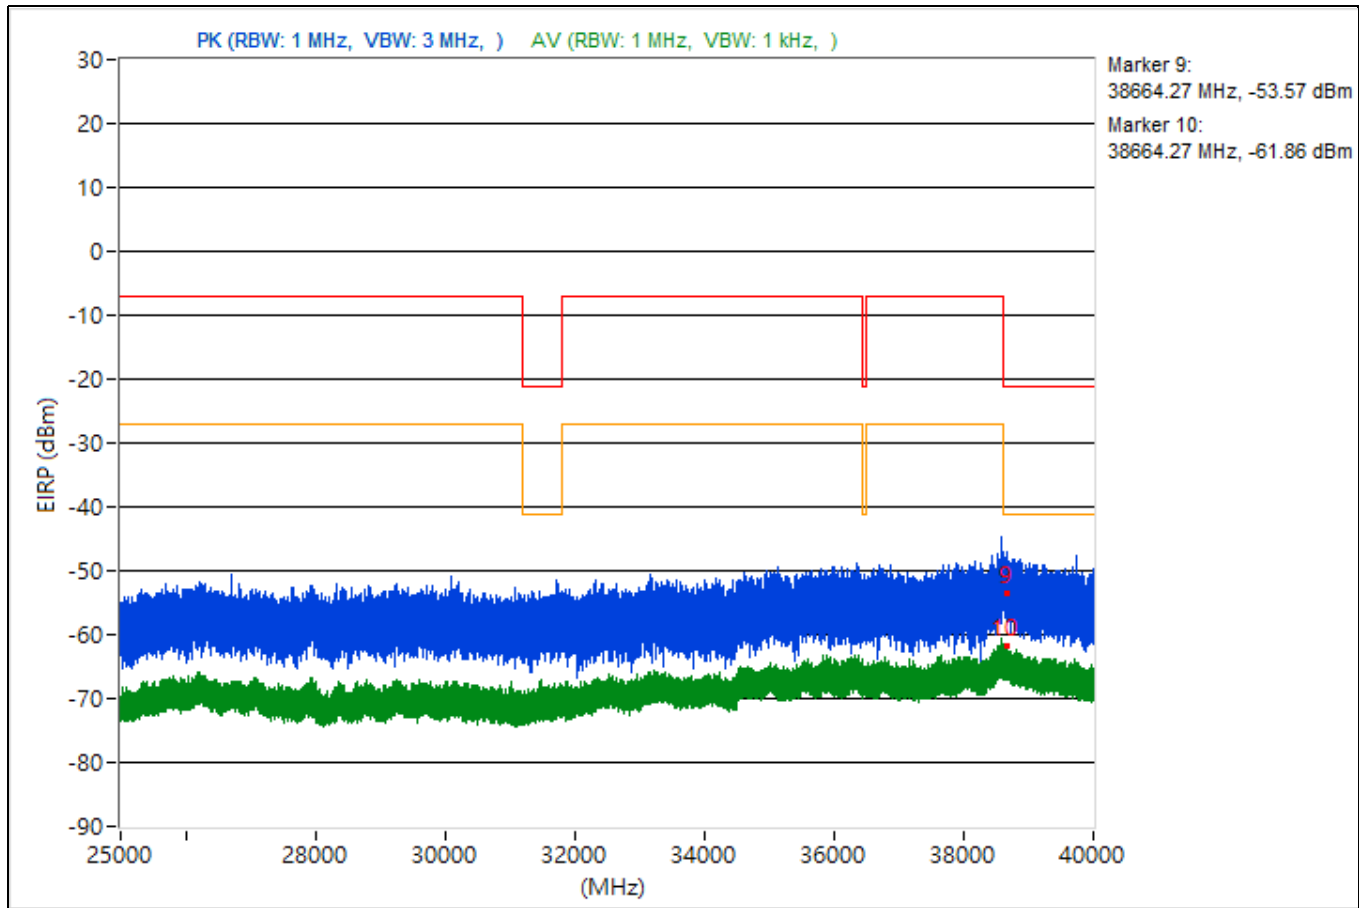


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3801.48	47.49 PK	74	-26.51	-52.69	4.92	-47.77
2	3801.48	35.89 AV	54	-18.11	-64.29	4.92	-59.37
3	14483.47	47.28 PK	74	-26.72	-52.9	4.92	-47.98
4	14483.47	34.77 AV	54	-19.23	-65.41	4.92	-60.49
5	19103.7	47.18 PK	74	-26.82	-53	4.92	-48.08
6	19103.7	37.47 AV	54	-16.53	-62.71	4.92	-57.79
7	22407.7	45.75 PK	74	-28.25	-54.43	4.92	-49.51
8	22407.7	37.09 AV	54	-16.91	-63.09	4.92	-58.17
9	38634.93	44.38 PK	74	-29.62	-55.8	4.92	-50.88
10	38634.93	33.86 AV	54	-20.14	-66.32	4.92	-61.4

Note: Margin value = Emission Level - Limit value

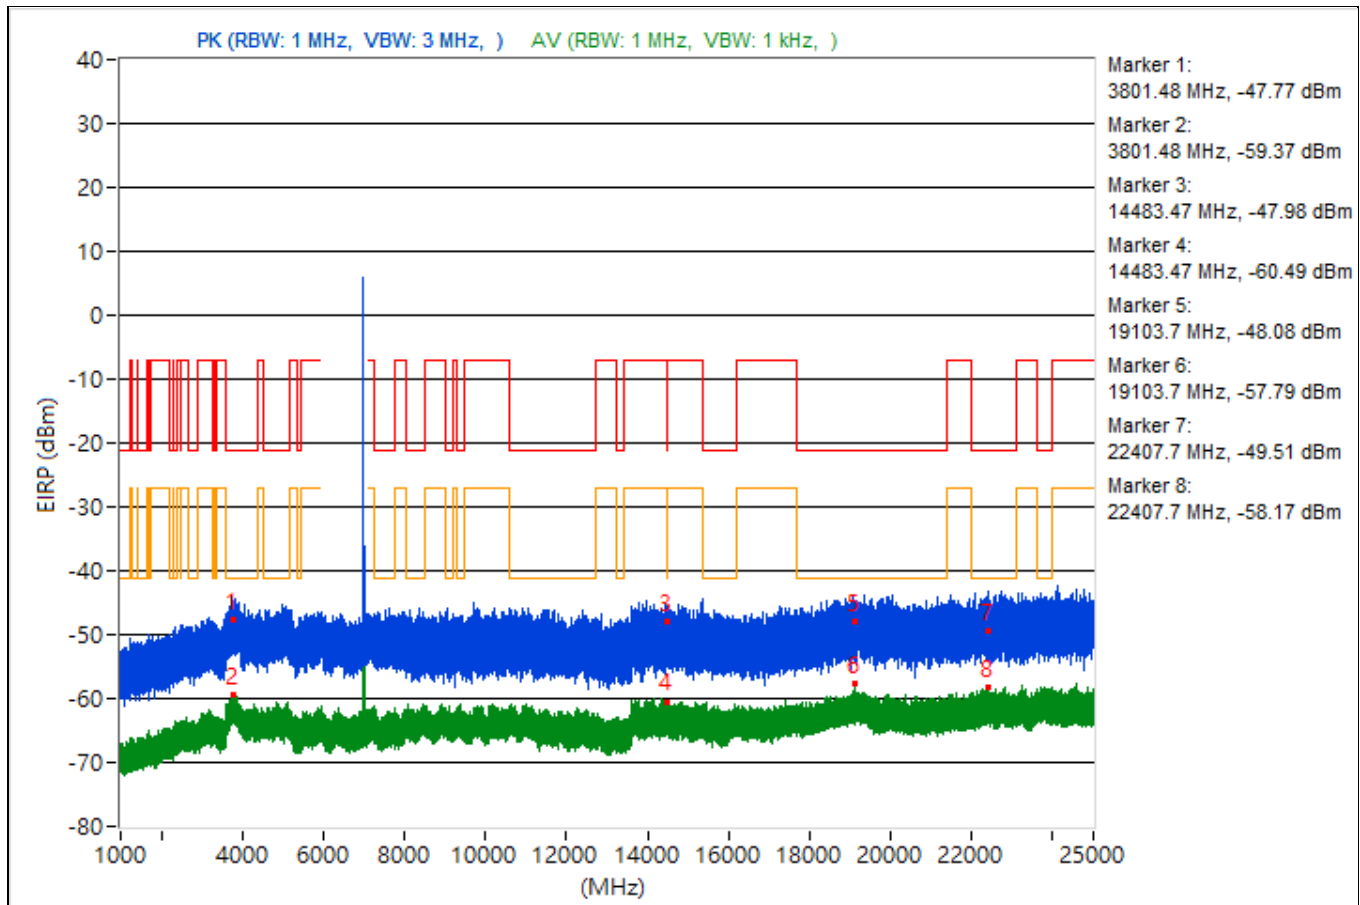


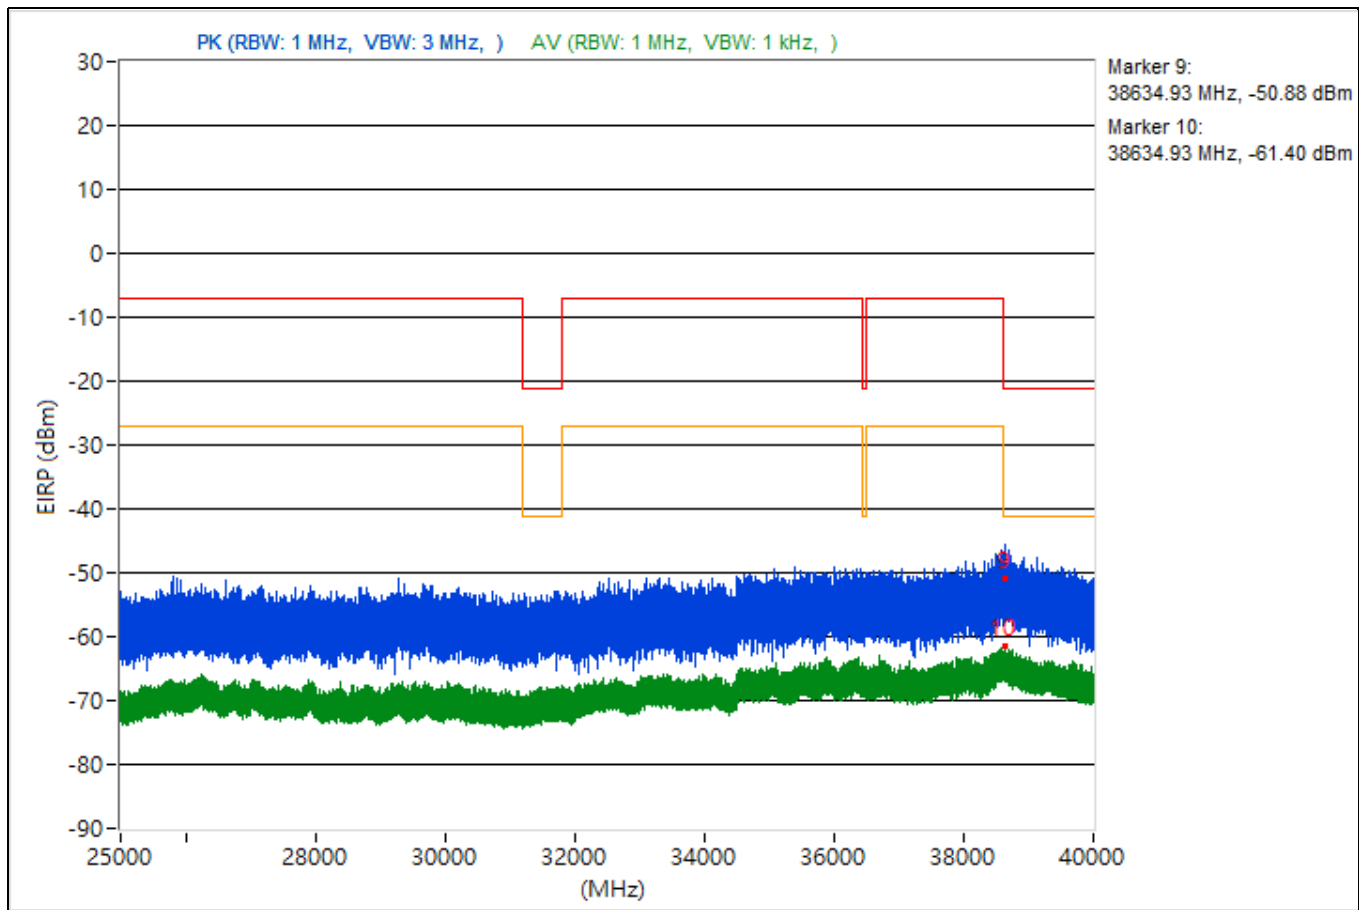


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3684.03	46.32 PK	74	-27.68	-53.86	4.92	-48.94
2	3684.03	35.94 AV	54	-18.06	-64.24	4.92	-59.32
3	14479.38	44.69 PK	74	-29.31	-55.49	4.92	-50.57
4	14479.38	35 AV	54	-19	-65.18	4.92	-60.26
5	19464.5	47.25 PK	74	-26.75	-52.93	4.92	-48.01
6	19464.5	36.52 AV	54	-17.48	-63.66	4.92	-58.74
7	22844.4	47.46 PK	74	-26.54	-52.72	4.92	-47.8
8	22844.4	37.2 AV	54	-16.8	-62.98	4.92	-58.06
9	38652.98	43.73 PK	74	-30.27	-56.45	4.92	-51.53
10	38652.98	33.2 AV	54	-20.8	-66.98	4.92	-62.06

Note: Margin value = Emission Level - Limit value

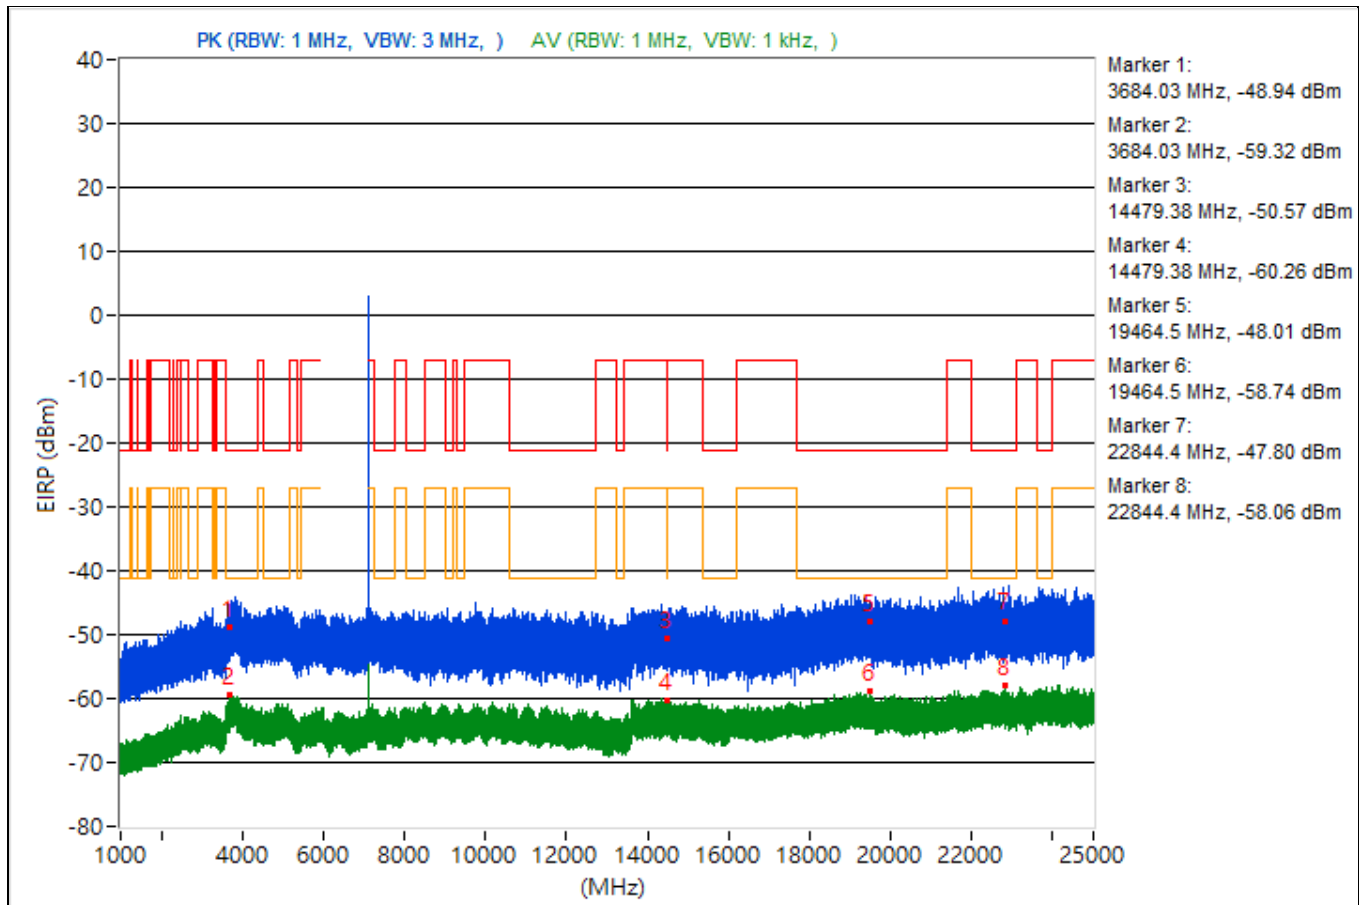


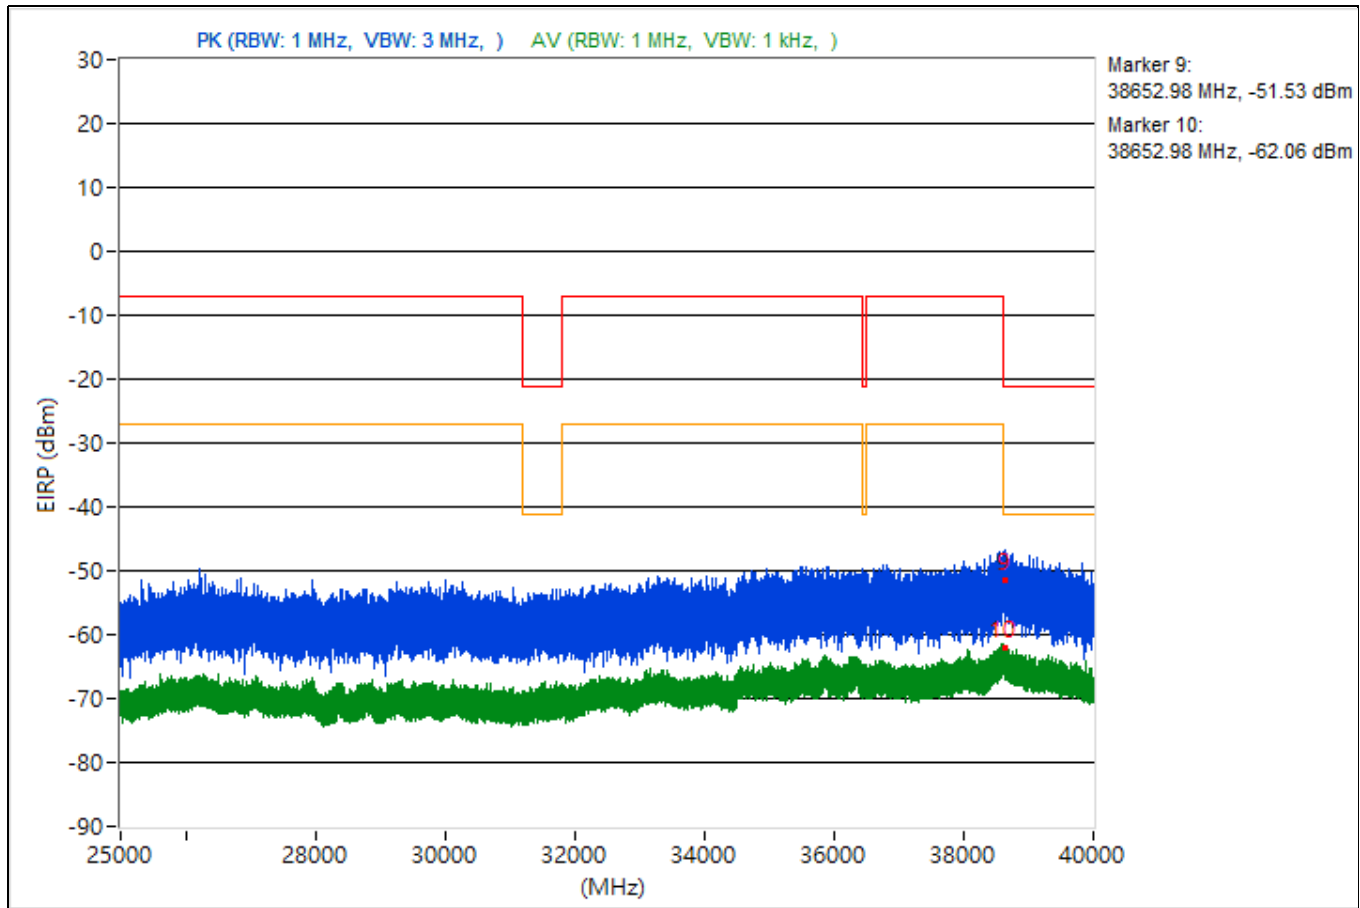


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3756.21	47.35 PK	74	-26.65	-52.83	4.92	-47.91
2	3756.21	35.83 AV	54	-18.17	-64.35	4.92	-59.43
3	14476.8	44.31 PK	74	-29.69	-55.87	4.92	-50.95
4	14476.8	34.94 AV	54	-19.06	-65.24	4.92	-60.32
5	19168.9	47.2 PK	74	-26.8	-52.98	4.92	-48.06
6	19168.9	36.68 AV	54	-17.32	-63.5	4.92	-58.58
7	22811.4	44.89 PK	74	-29.11	-55.29	4.92	-50.37
8	22811.4	36.96 AV	54	-17.04	-63.22	4.92	-58.3
9	38603.2	43.64 PK	74	-30.36	-56.54	4.92	-51.62
10	38603.2	33.37 AV	54	-20.63	-66.81	4.92	-61.89

Note: Margin value = Emission Level - Limit value

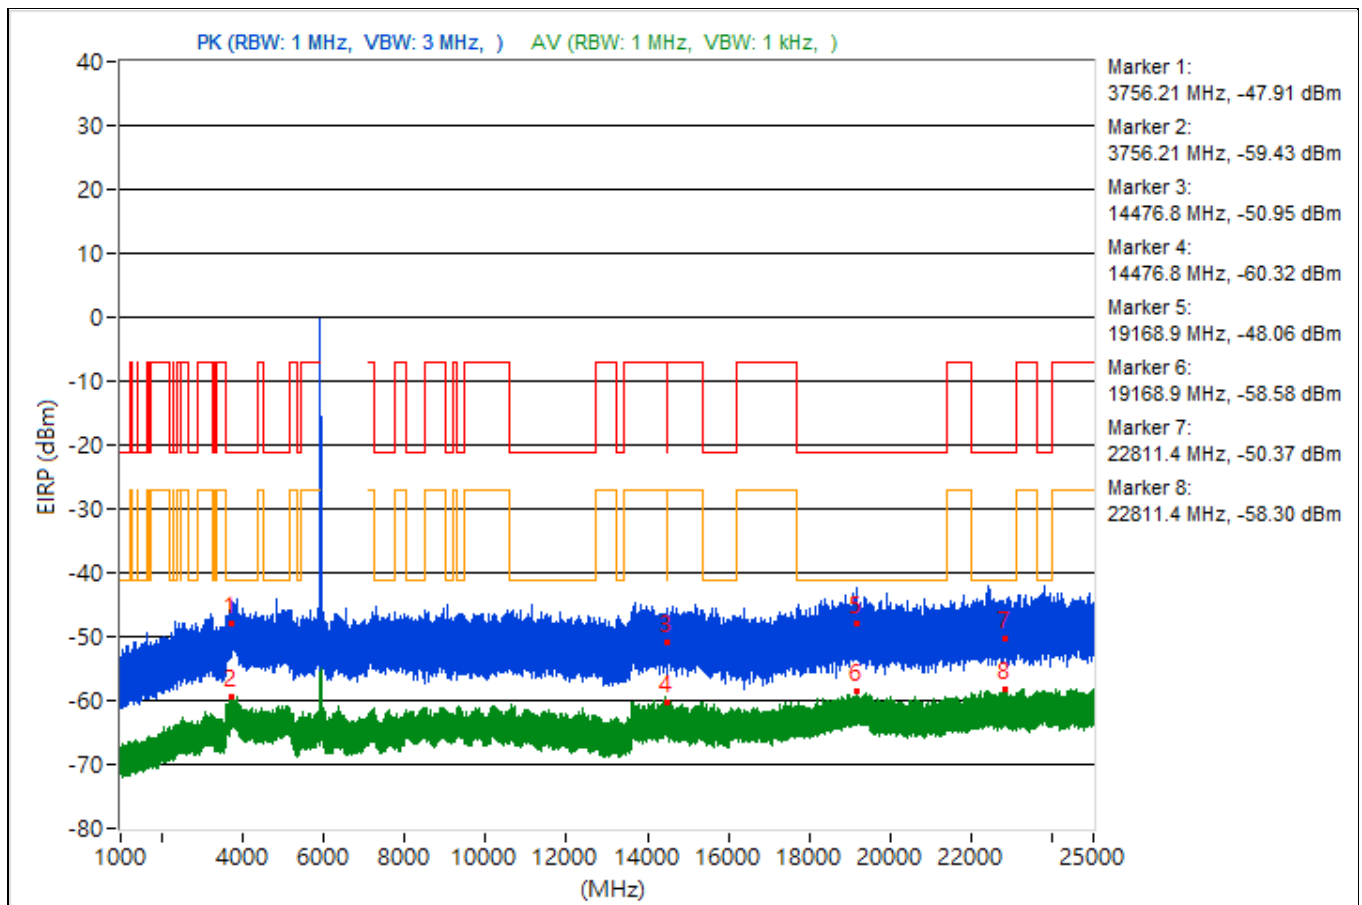


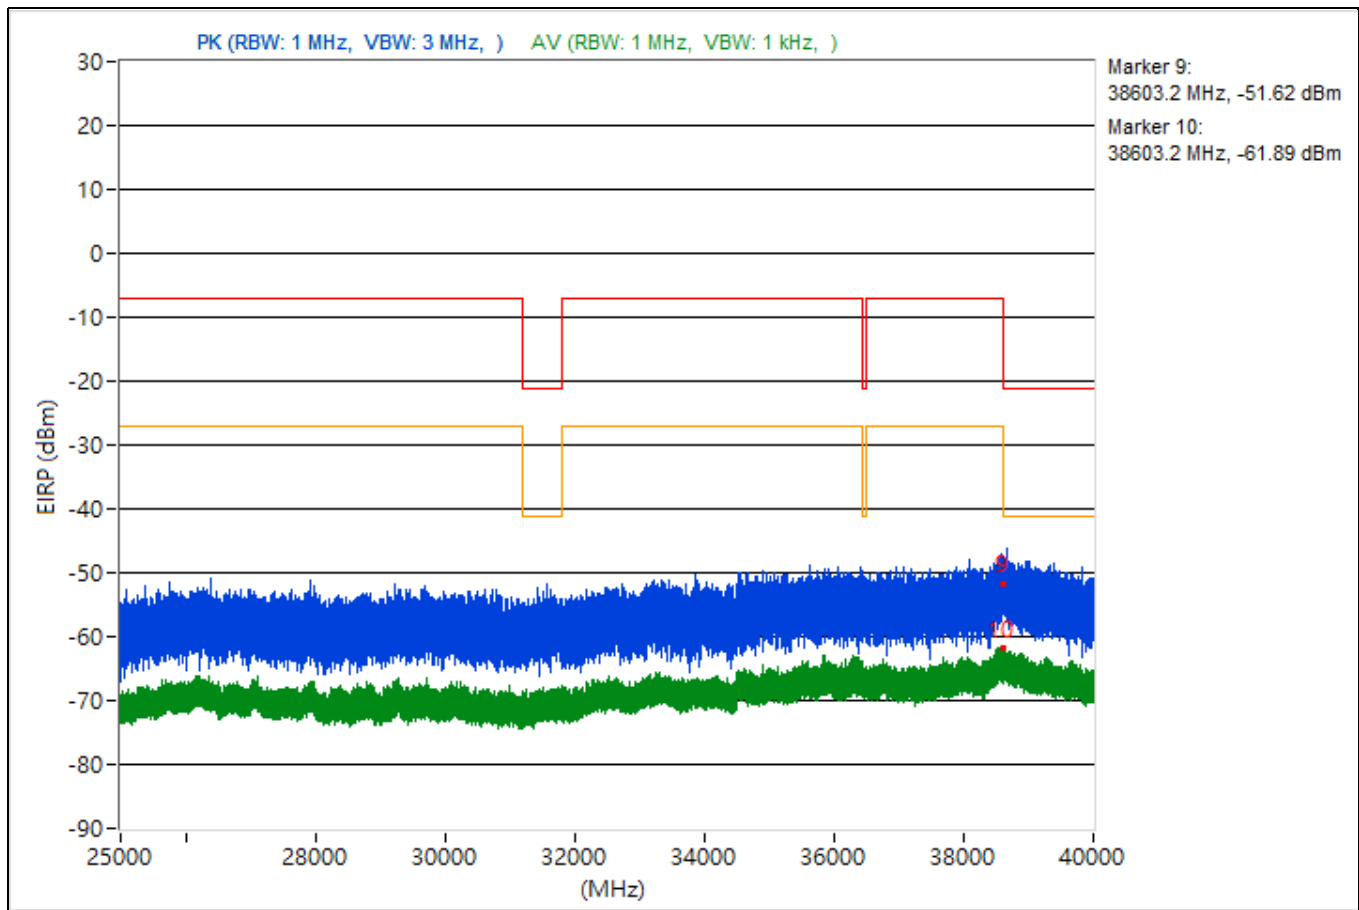


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3803.97	43.38 PK	74	-30.62	-56.8	4.92	-51.88
2	3803.97	35.74 AV	54	-18.26	-64.44	4.92	-59.52
3	8435.73	45.2 PK	74	-28.8	-54.98	4.92	-50.06
4	8435.73	35.06 AV	54	-18.94	-65.12	4.92	-60.2
5	19149.5	46.4 PK	74	-27.6	-53.78	4.92	-48.86
6	19149.5	37.1 AV	54	-16.9	-63.08	4.92	-58.16
7	23765.4	48.49 PK	74	-25.51	-51.69	4.92	-46.77
8	23765.4	36.99 AV	54	-17.01	-63.19	4.92	-58.27
9	38617.69	43.67 PK	74	-30.33	-56.51	4.92	-51.59
10	38617.69	34 AV	54	-20	-66.18	4.92	-61.26

Note: Margin value = Emission Level - Limit value

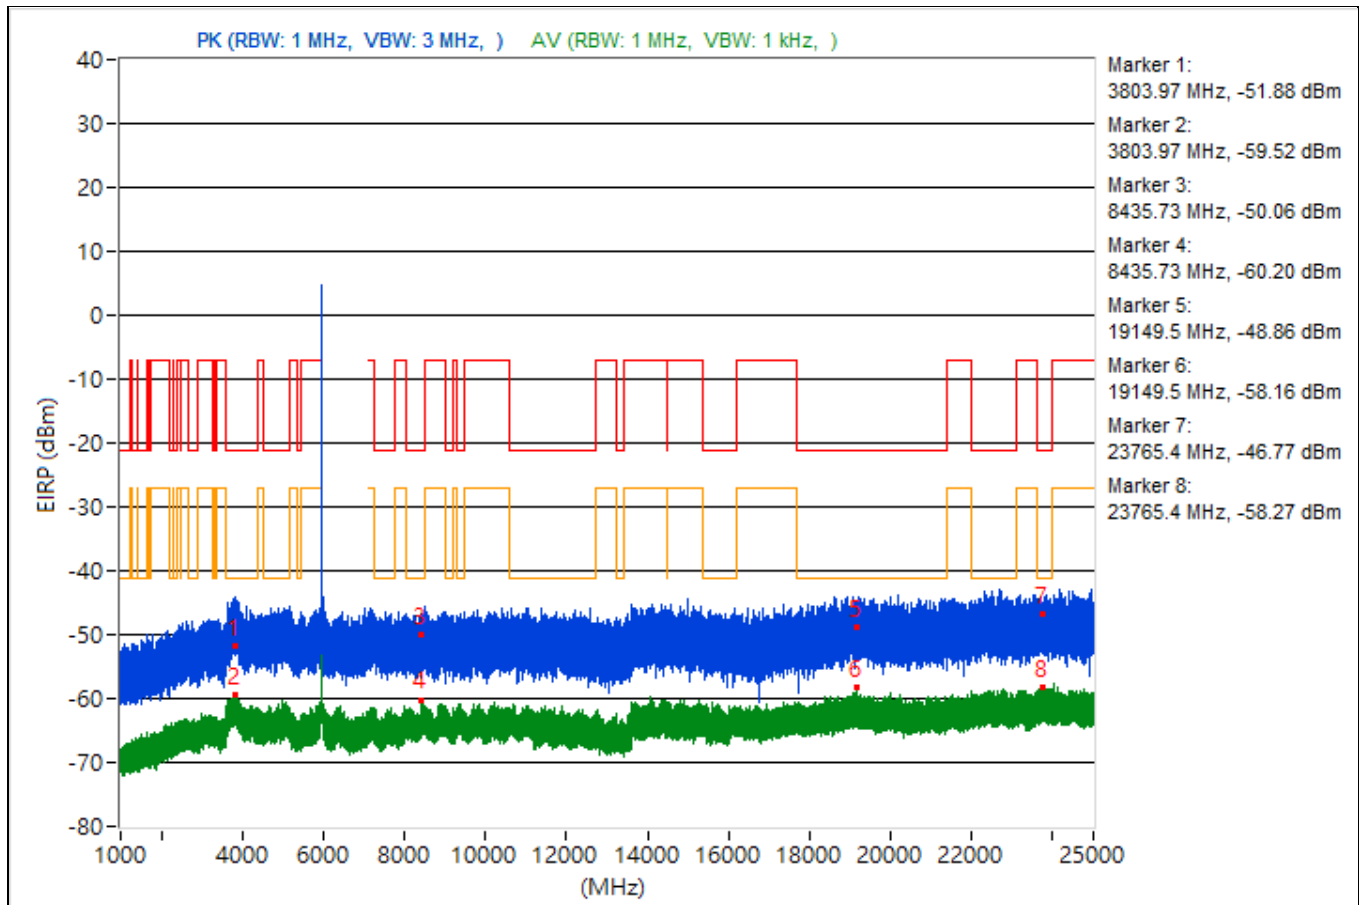


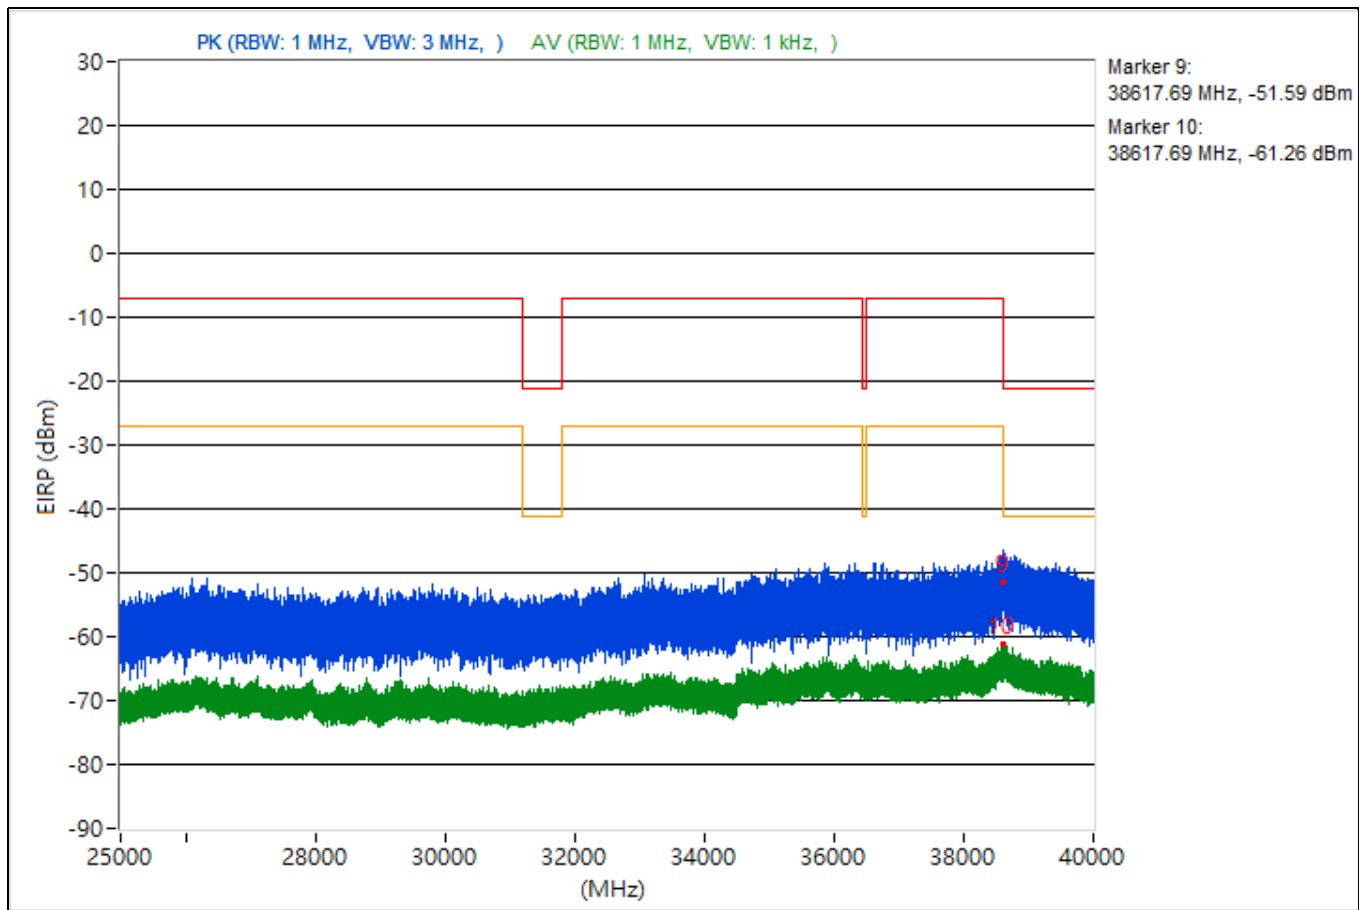


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3769.43	44.26 PK	74	-29.74	-55.92	4.92	-51
2	3769.43	36.2 AV	54	-17.8	-63.98	4.92	-59.06
3	9384.89	43.77 PK	74	-30.23	-56.41	4.92	-51.49
4	9384.89	35.22 AV	54	-18.78	-64.96	4.92	-60.04
5	18690.6	44.76 PK	74	-29.24	-55.42	4.92	-50.5
6	18690.6	36.4 AV	54	-17.6	-63.78	4.92	-58.86
7	23644.9	42.07 PK	74	-31.93	-58.11	4.92	-53.19
8	23644.9	37.29 AV	54	-16.71	-62.89	4.92	-57.97
9	38611.02	42.82 PK	74	-31.18	-57.36	4.92	-52.44
10	38611.02	33.55 AV	54	-20.45	-66.63	4.92	-61.71

Note: Margin value = Emission Level - Limit value

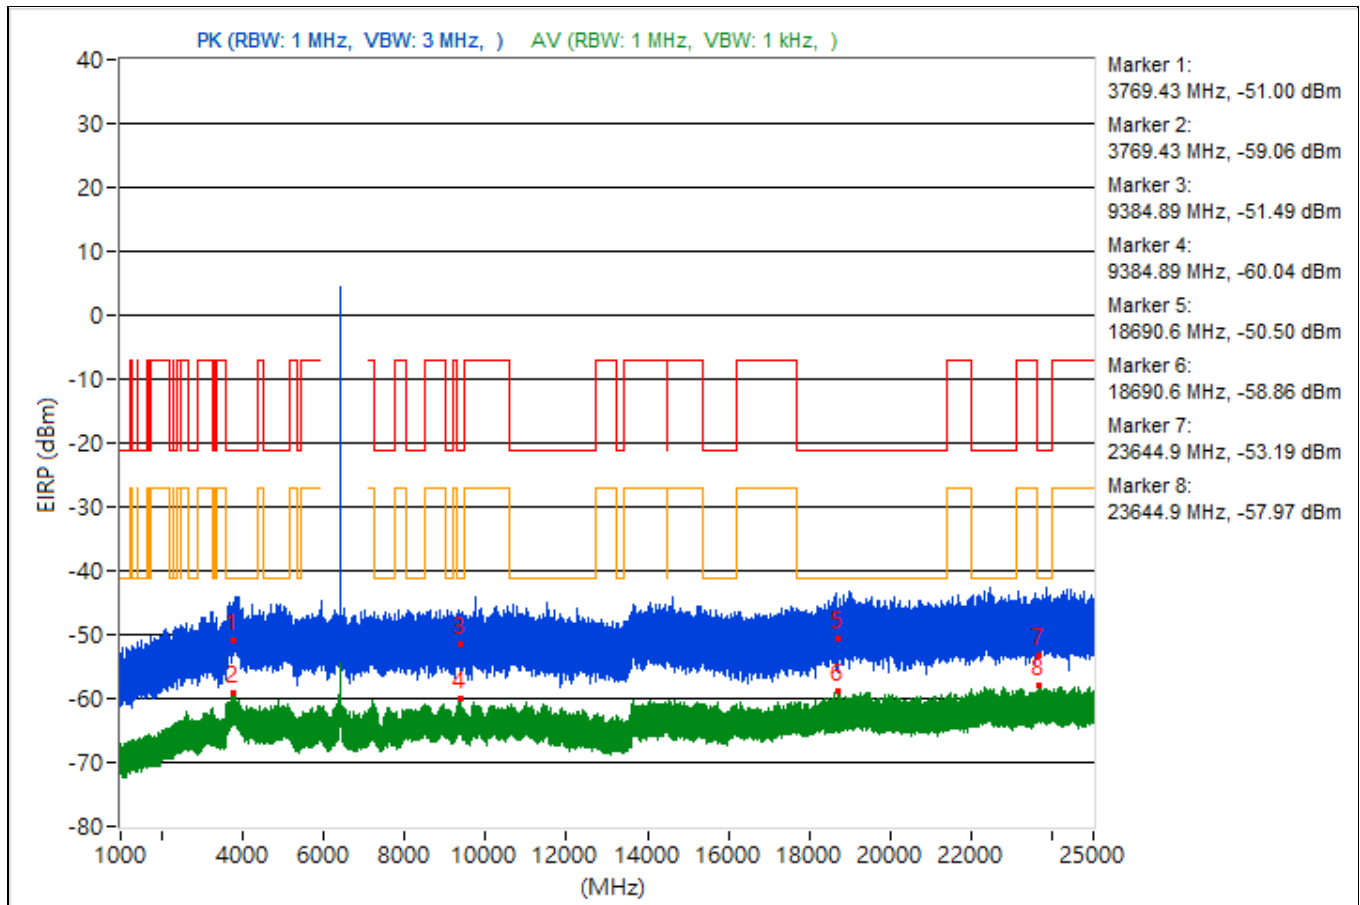


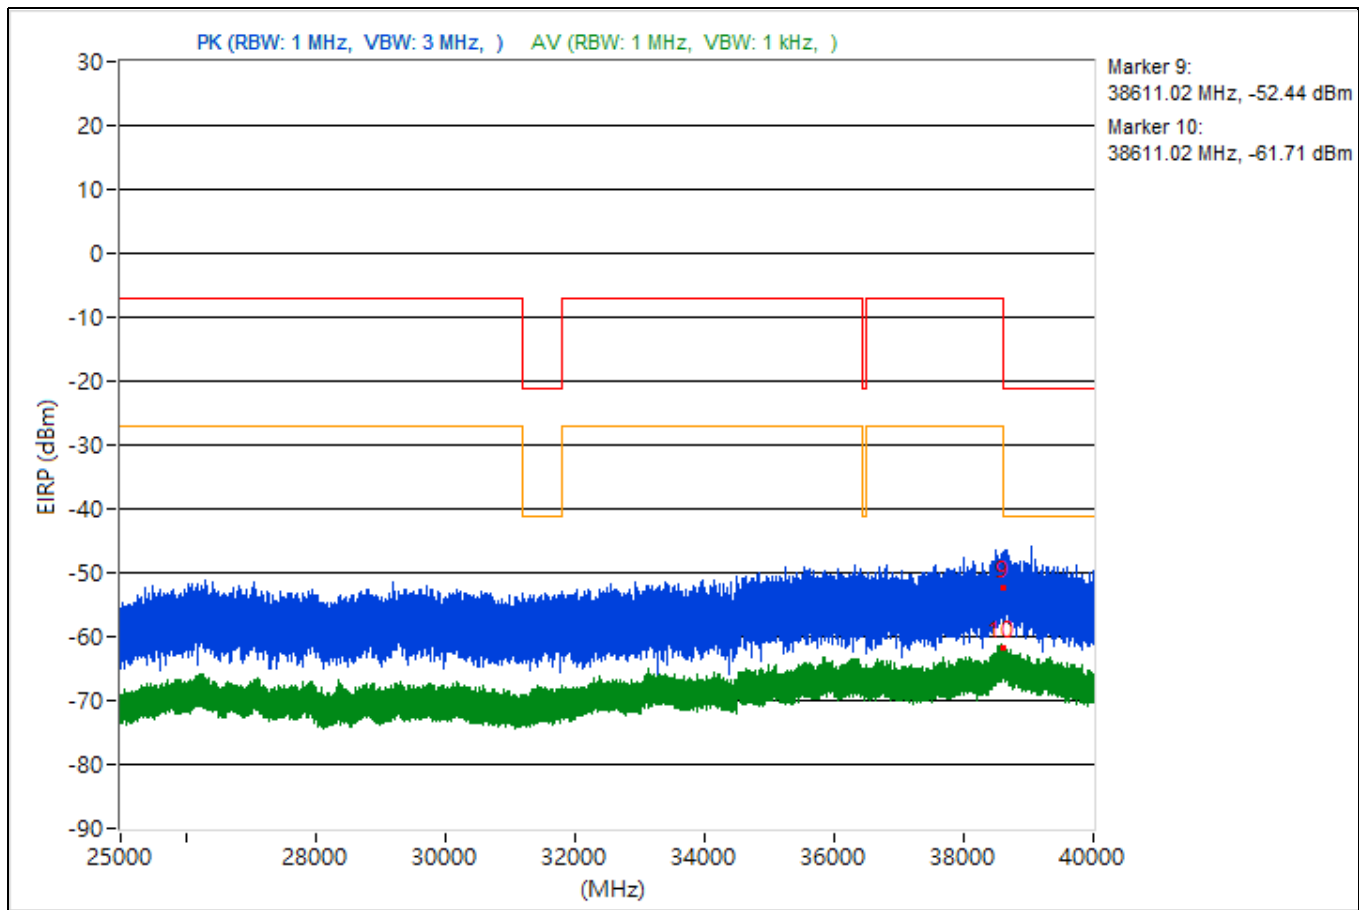


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3717.56	44.56 PK	74	-29.44	-55.62	4.92	-50.7
2	3717.56	36.26 AV	54	-17.74	-63.92	4.92	-59
3	14490.22	42.65 PK	74	-31.35	-57.53	4.92	-52.61
4	14490.22	35 AV	54	-19	-65.18	4.92	-60.26
5	19121.9	43.63 PK	74	-30.37	-56.55	4.92	-51.63
6	19121.9	36.6 AV	54	-17.4	-63.58	4.92	-58.66
7	23988.8	49.69 PK	74	-24.31	-50.49	4.92	-45.57
8	23988.8	37.52 AV	54	-16.48	-62.66	4.92	-57.74
9	38649.24	40.94 PK	74	-33.06	-59.24	4.92	-54.32
10	38649.24	33.7 AV	54	-20.3	-66.48	4.92	-61.56

Note: Margin value = Emission Level - Limit value

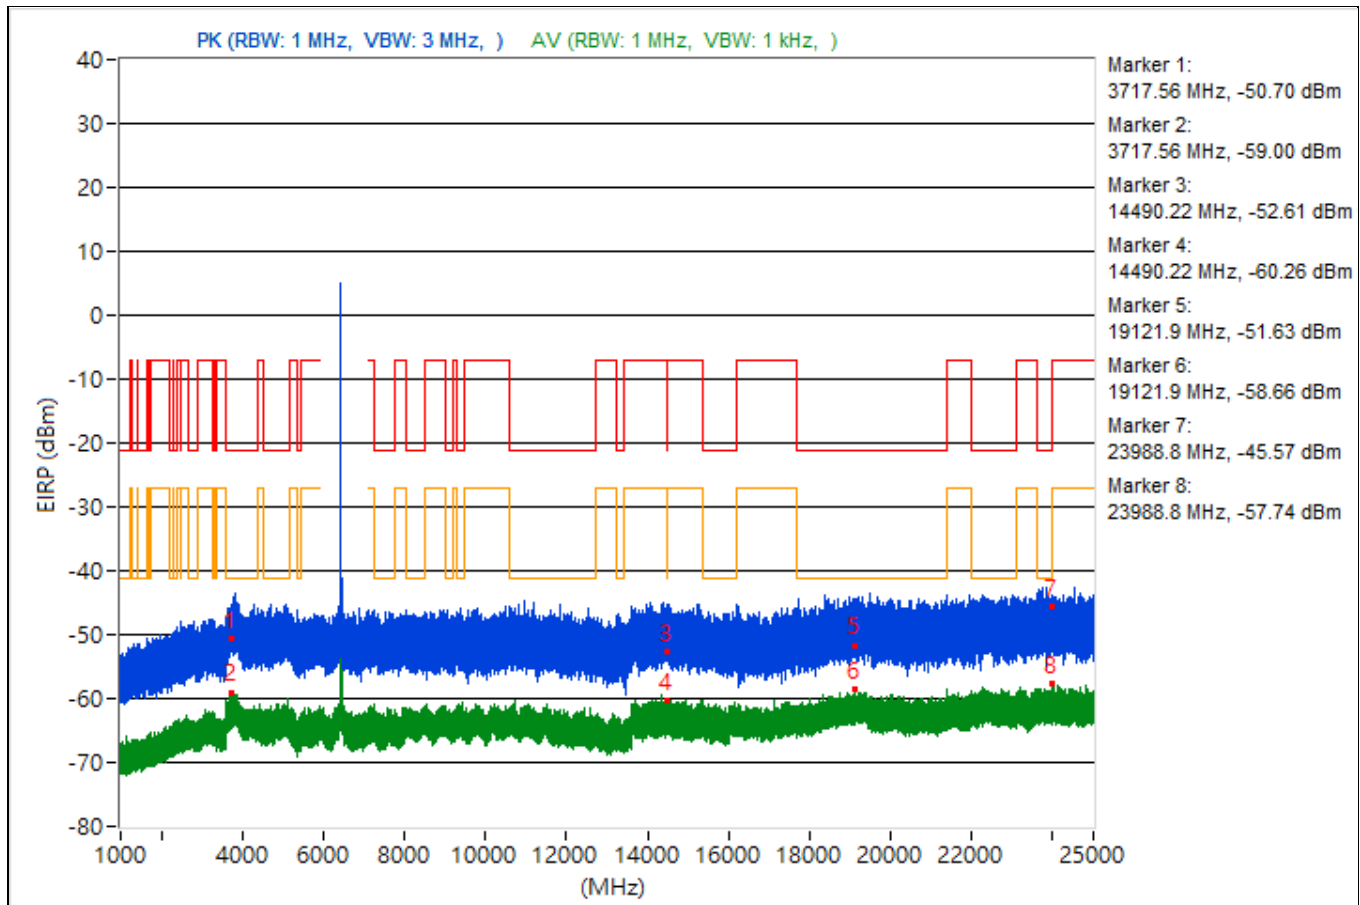


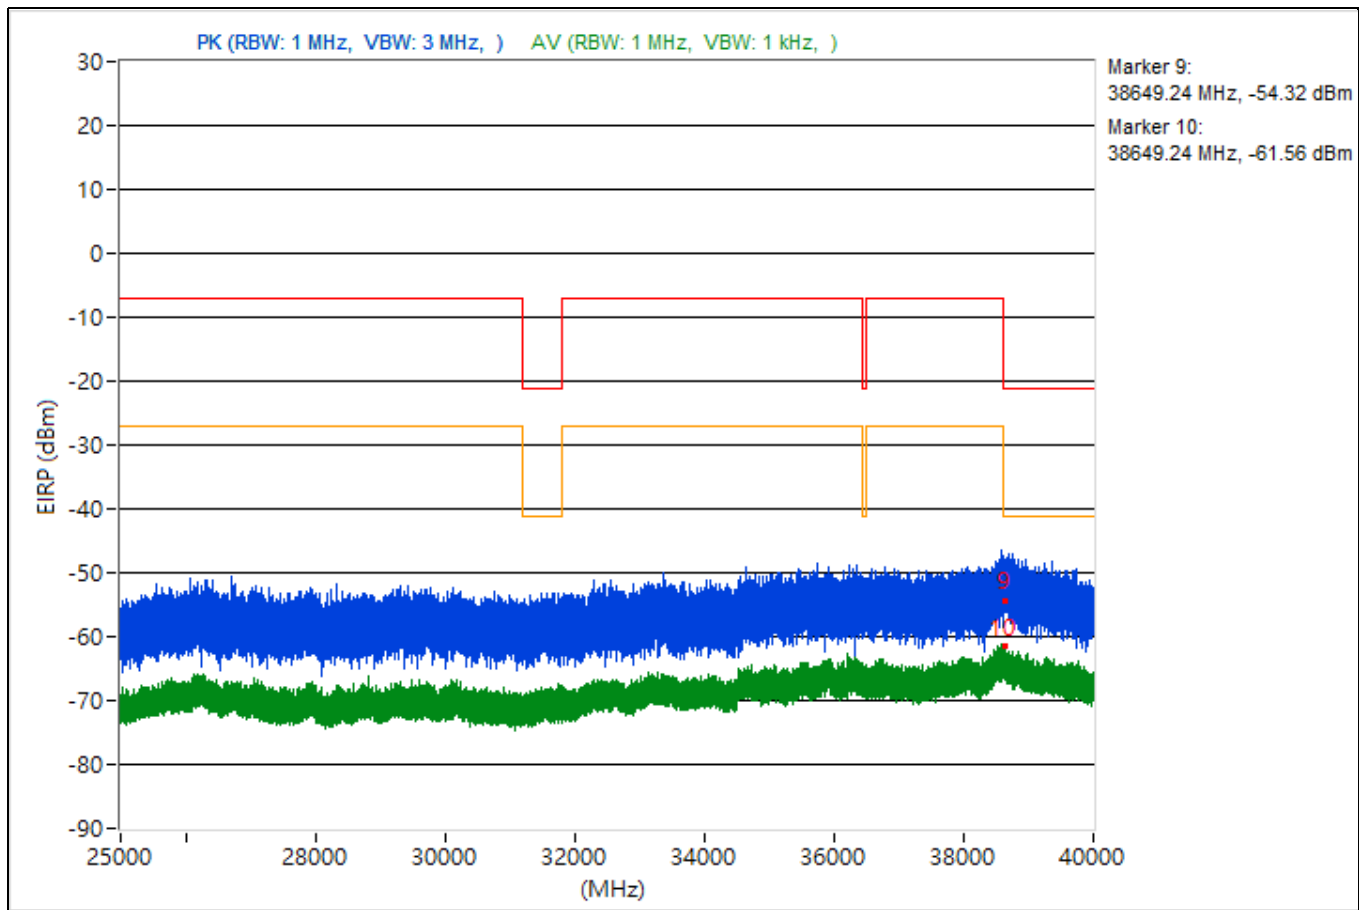


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3735.83	47.15 PK	74	-26.85	-53.03	4.92	-48.11
2	3735.83	36.3 AV	54	-17.7	-63.88	4.92	-58.96
3	9391.02	43.47 PK	74	-30.53	-56.71	4.92	-51.79
4	9391.02	34.62 AV	54	-19.38	-65.56	4.92	-60.64
5	19372	47.56 PK	74	-26.44	-52.62	4.92	-47.7
6	19372	37.07 AV	54	-16.93	-63.11	4.92	-58.19
7	23975.1	48.26 PK	74	-25.74	-51.92	4.92	-47
8	23975.1	37.31 AV	54	-16.69	-62.87	4.92	-57.95
9	38604.44	43.24 PK	74	-30.76	-56.94	4.92	-52.02
10	38604.44	33.59 AV	54	-20.41	-66.59	4.92	-61.67

Note: Margin value = Emission Level - Limit value

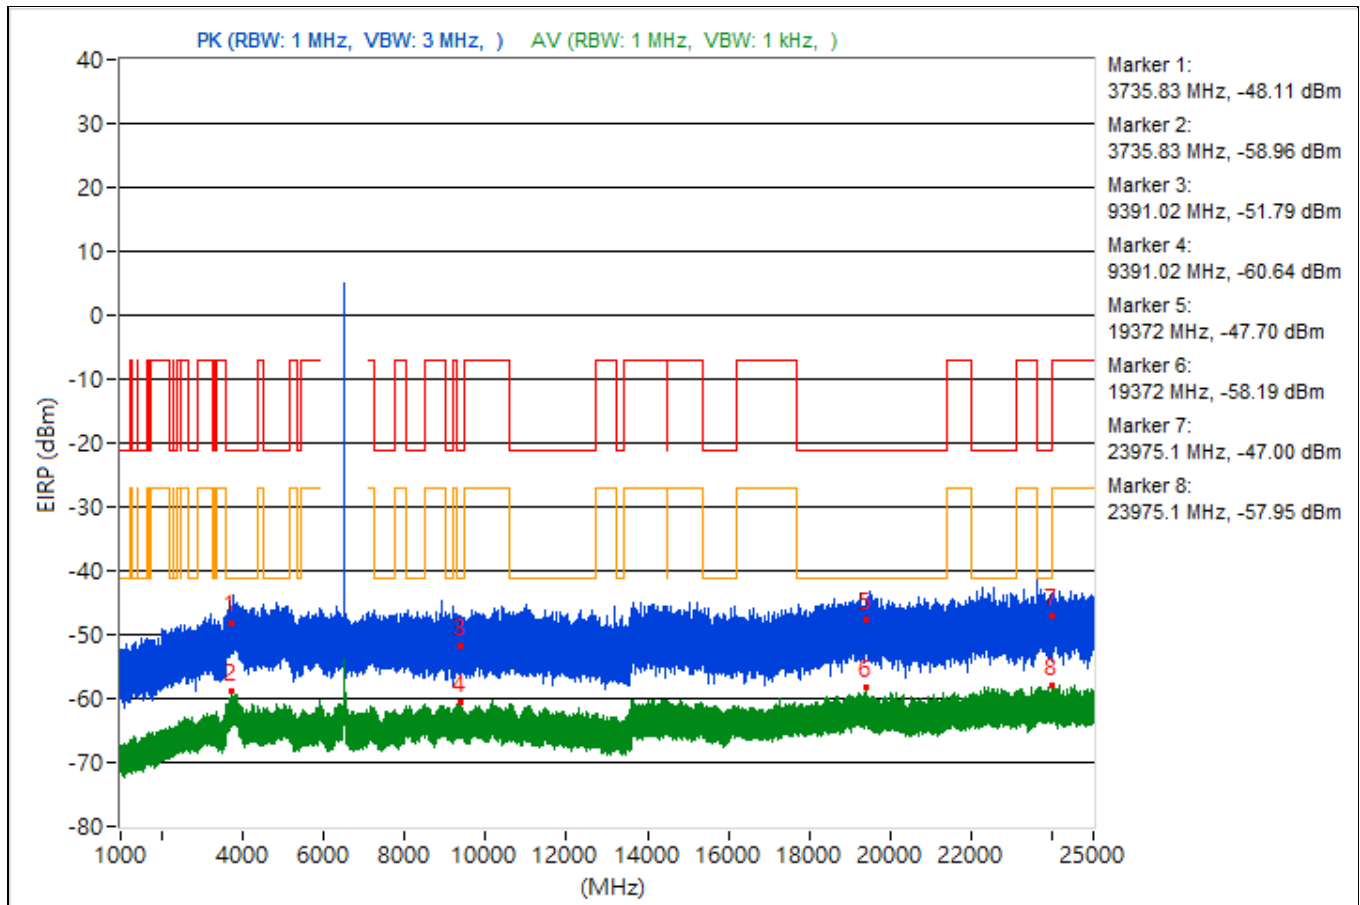


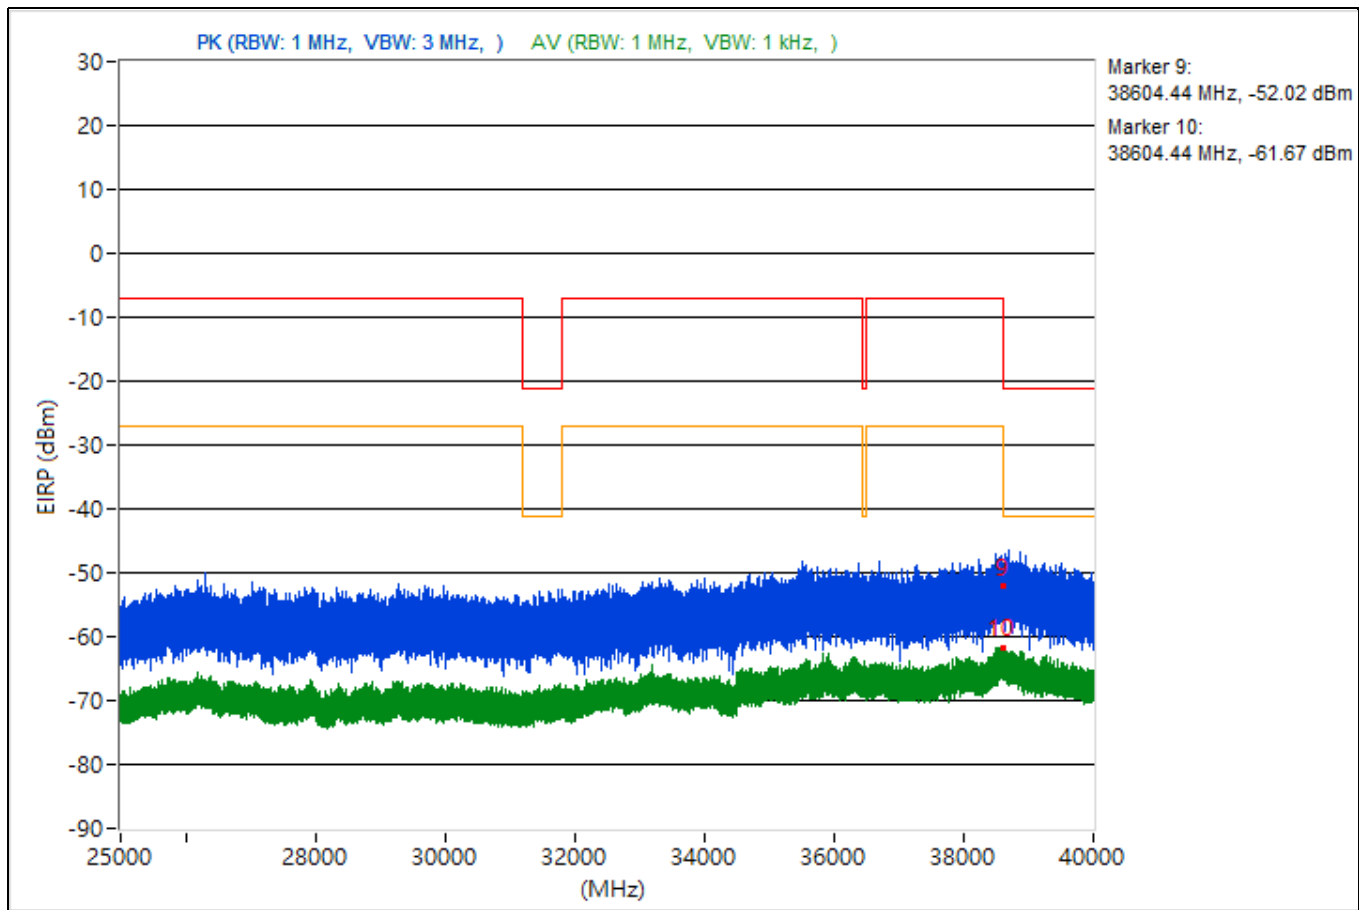


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3833.91	47.36 PK	74	-26.64	-52.82	4.92	-47.9
2	3833.91	35.99 AV	54	-18.01	-64.19	4.92	-59.27
3	14477.33	45.95 PK	74	-28.05	-54.23	4.92	-49.31
4	14477.33	35.49 AV	54	-18.51	-64.69	4.92	-59.77
5	19175.1	47.39 PK	74	-26.61	-52.79	4.92	-47.87
6	19175.1	36.02 AV	54	-17.98	-64.16	4.92	-59.24
7	23665.8	47.11 PK	74	-26.89	-53.07	4.92	-48.15
8	23665.8	37.33 AV	54	-16.67	-62.85	4.92	-57.93
9	38617.42	42.14 PK	74	-31.86	-58.04	4.92	-53.12
10	38617.42	33.32 AV	54	-20.68	-66.86	4.92	-61.94

Note: Margin value = Emission Level - Limit value

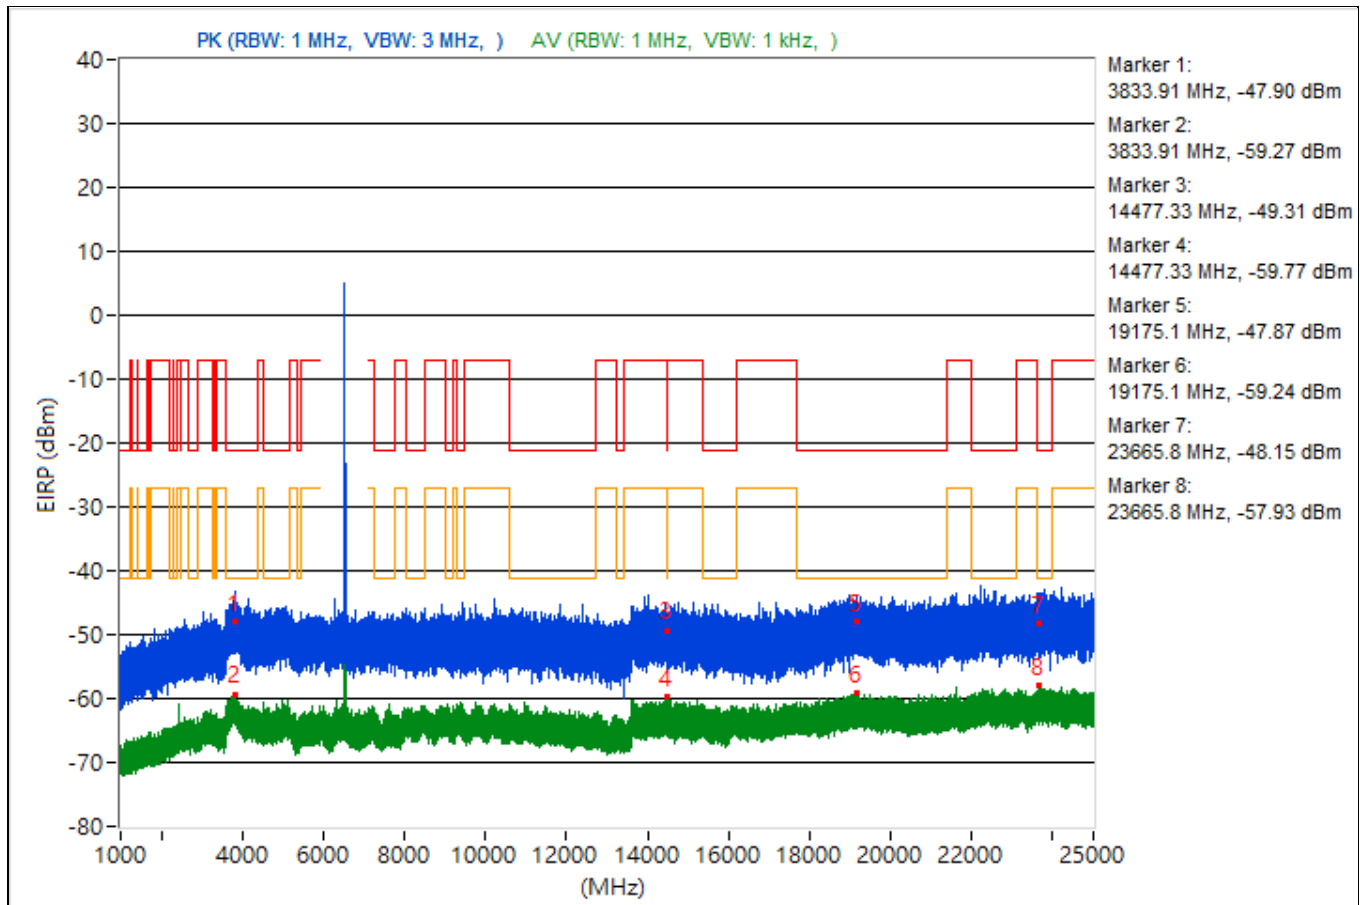


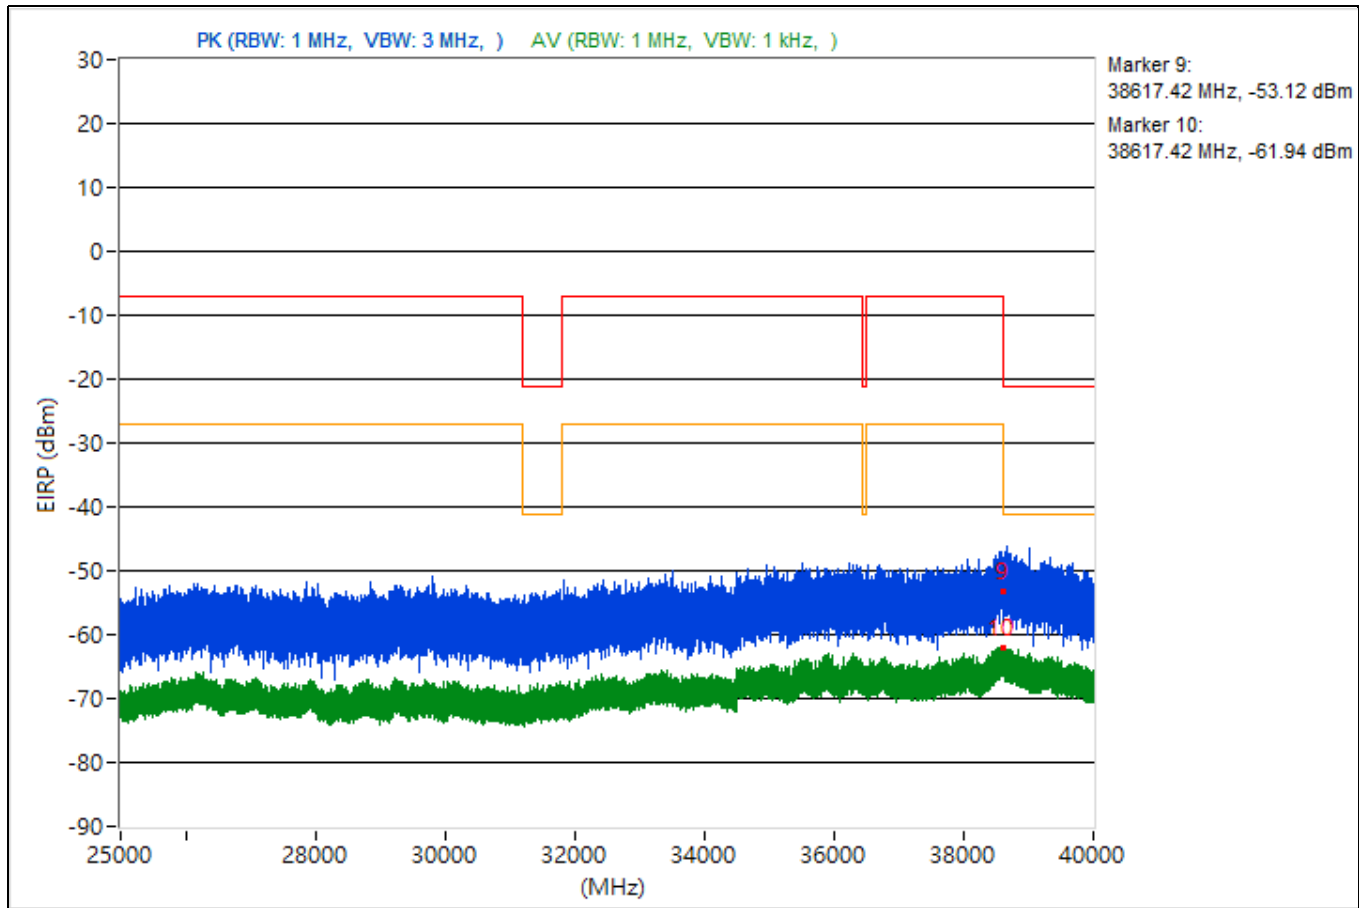


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.76	47.22 PK	74	-26.78	-52.96	4.92	-48.04
2	3798.76	36.68 AV	54	-17.32	-63.5	4.92	-58.58
3	14497.87	45.27 PK	74	-28.73	-54.91	4.92	-49.99
4	14497.87	34.88 AV	54	-19.12	-65.3	4.92	-60.38
5	19164.2	46.56 PK	74	-27.44	-53.62	4.92	-48.7
6	19164.2	36.32 AV	54	-17.68	-63.86	4.92	-58.94
7	22392.7	45.51 PK	74	-28.49	-54.67	4.92	-49.75
8	22392.7	37.64 AV	54	-16.36	-62.54	4.92	-57.62
9	38852.98	43.51 PK	74	-30.49	-56.67	4.92	-51.75
10	38852.98	33.62 AV	54	-20.38	-66.56	4.92	-61.64

Note: Margin value = Emission Level - Limit value

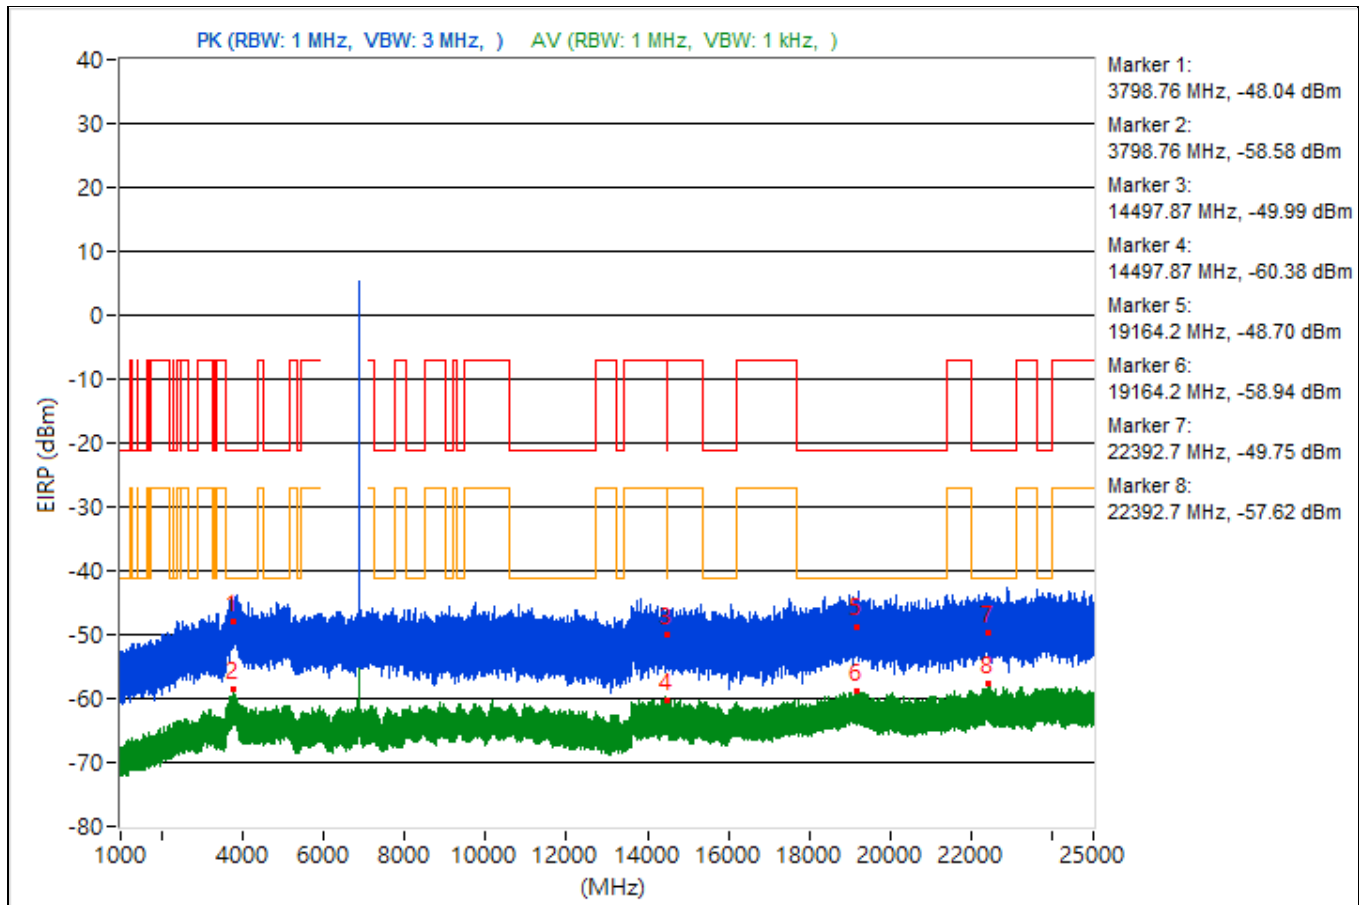


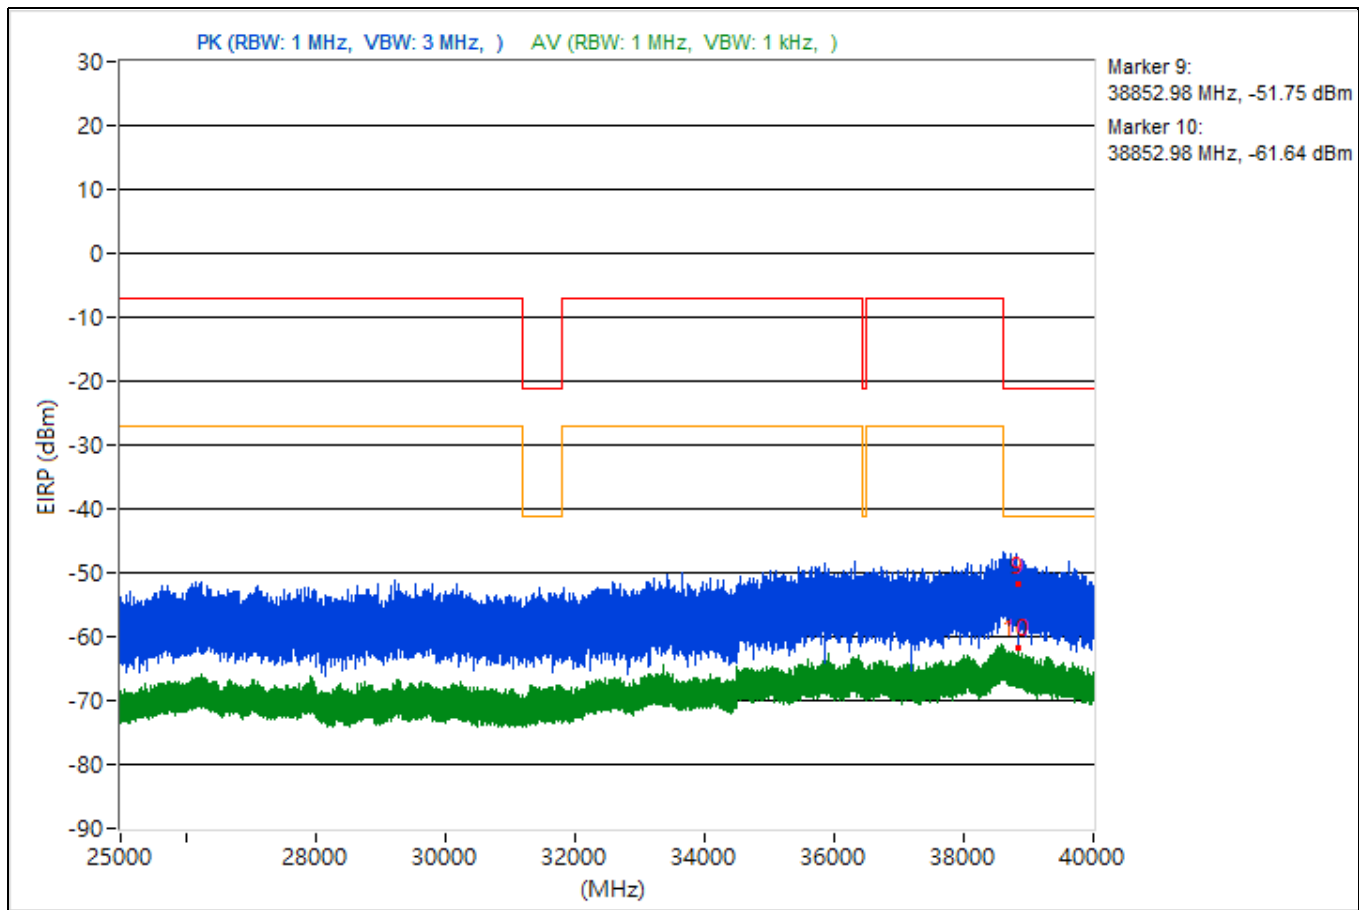


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3782.19	49.03 PK	74	-24.97	-51.15	4.92	-46.23
2	3782.19	36.26 AV	54	-17.74	-63.92	4.92	-59
3	8433.42	41.08 PK	74	-32.92	-59.1	4.92	-54.18
4	8433.42	34.97 AV	54	-19.03	-65.21	4.92	-60.29
5	19389.7	46.55 PK	74	-27.45	-53.63	4.92	-48.71
6	19389.7	36.91 AV	54	-17.09	-63.27	4.92	-58.35
7	23796.4	48.11 PK	74	-25.89	-52.07	4.92	-47.15
8	23796.4	37.48 AV	54	-16.52	-62.7	4.92	-57.78
9	38651.2	45.58 PK	74	-28.42	-54.6	4.92	-49.68
10	38651.2	33.99 AV	54	-20.01	-66.19	4.92	-61.27

Note: Margin value = Emission Level - Limit value

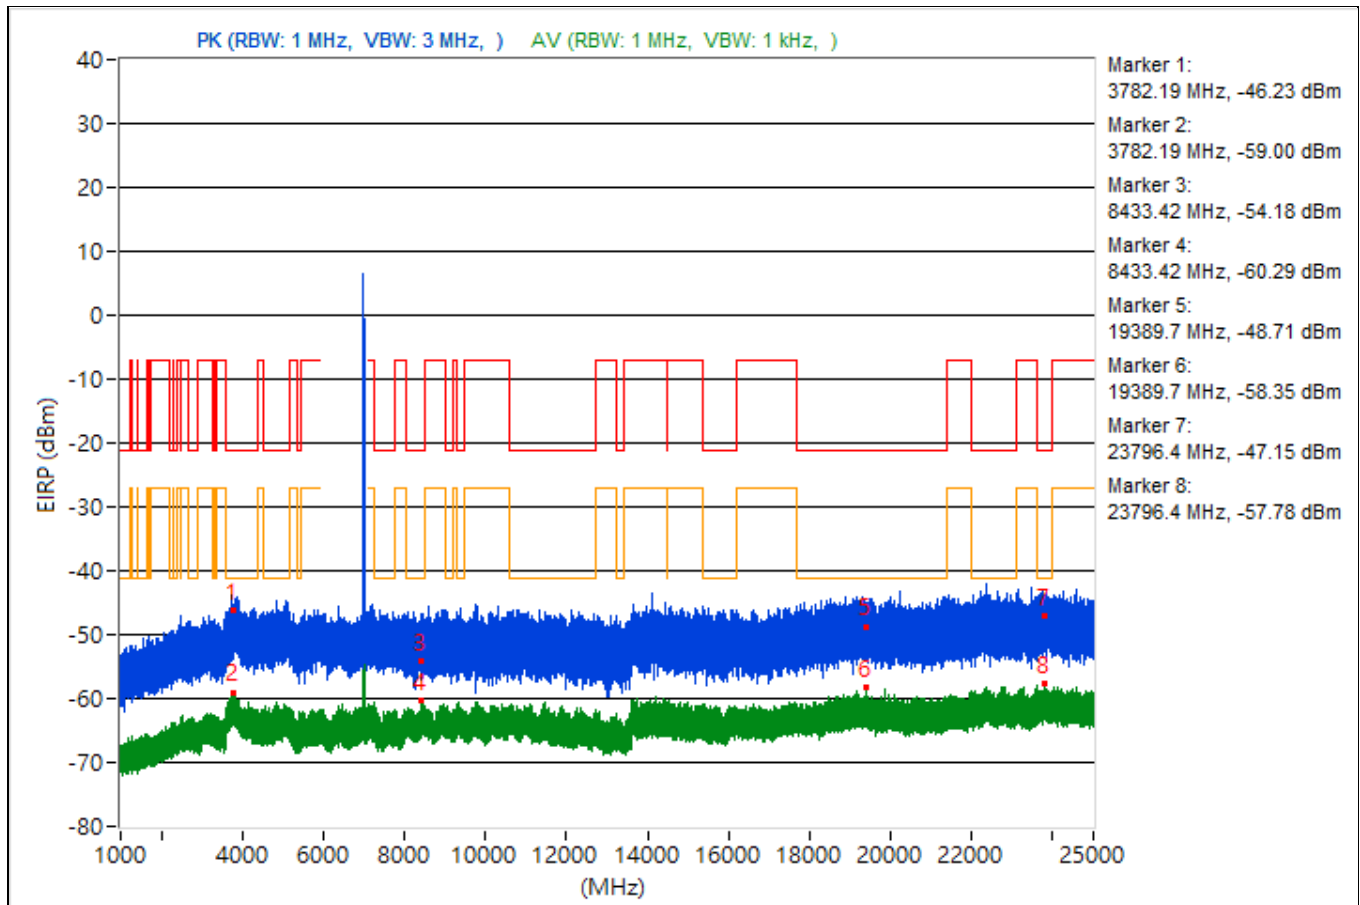


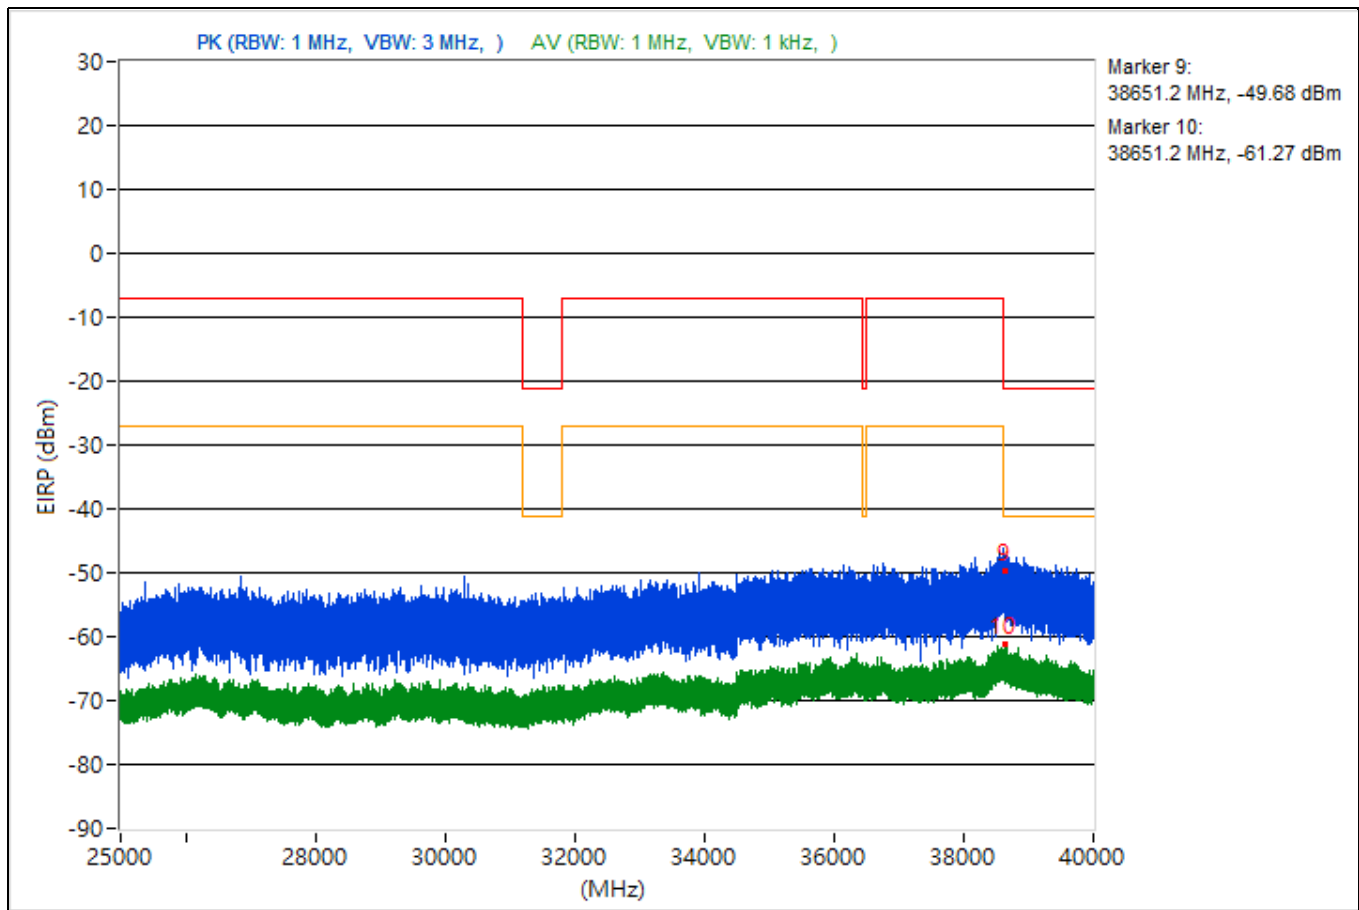


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3826.99	47.88 PK	74	-26.12	-52.3	4.92	-47.38
2	3826.99	35.96 AV	54	-18.04	-64.22	4.92	-59.3
3	14497.51	45.97 PK	74	-28.03	-54.21	4.92	-49.29
4	14497.51	35.32 AV	54	-18.68	-64.86	4.92	-59.94
5	19103.8	48.03 PK	74	-25.97	-52.15	4.92	-47.23
6	19103.8	36.31 AV	54	-17.69	-63.87	4.92	-58.95
7	23710.1	46.9 PK	74	-27.1	-53.28	4.92	-48.36
8	23710.1	38.14 AV	54	-15.86	-62.04	4.92	-57.12
9	38610.84	42.52 PK	74	-31.48	-57.66	4.92	-52.74
10	38610.84	33.7 AV	54	-20.3	-66.48	4.92	-61.56

Note: Margin value = Emission Level - Limit value

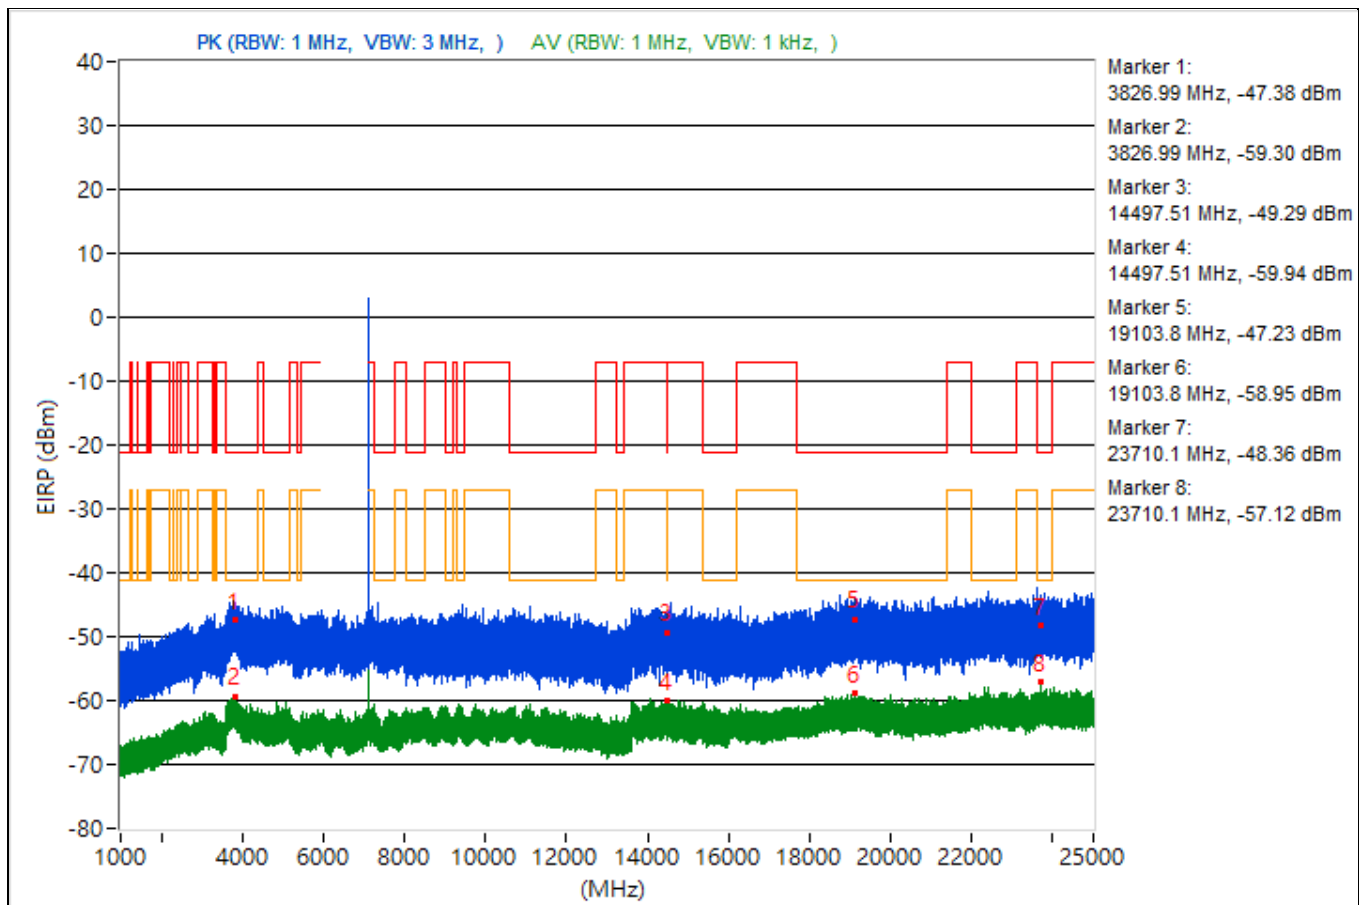


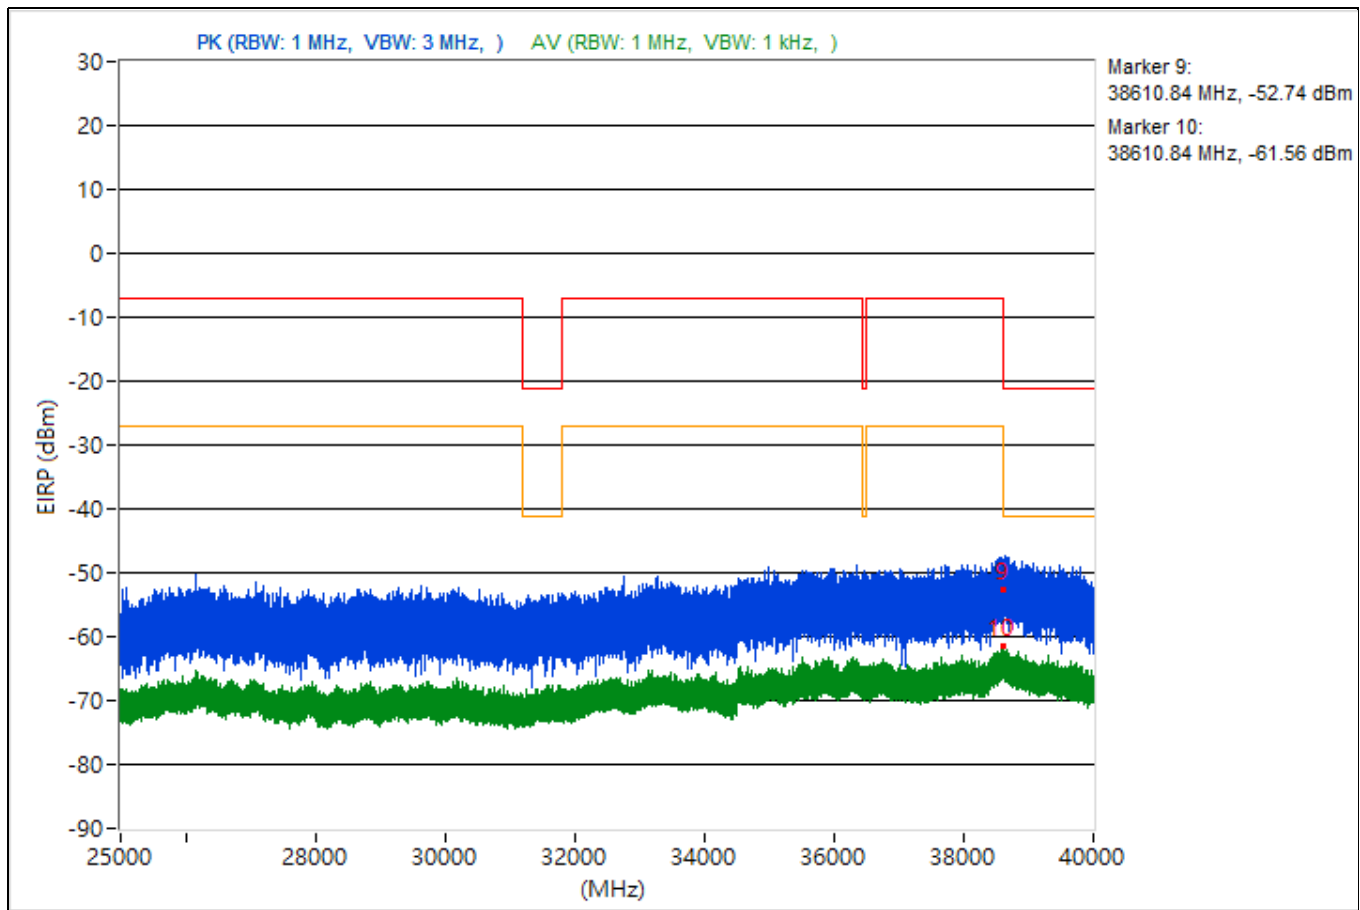


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3858.64	47.51 PK	74	-26.49	-52.67	4.92	-47.75
2	3858.64	36.38 AV	54	-17.62	-63.8	4.92	-58.88
3	14484.36	45.49 PK	74	-28.51	-54.69	4.92	-49.77
4	14484.36	34.8 AV	54	-19.2	-65.38	4.92	-60.46
5	19009.1	45.91 PK	74	-28.09	-54.27	4.92	-49.35
6	19009.1	36.84 AV	54	-17.16	-63.34	4.92	-58.42
7	23657.3	47.45 PK	74	-26.55	-52.73	4.92	-47.81
8	23657.3	37 AV	54	-17	-63.18	4.92	-58.26
9	38603.11	42.17 PK	74	-31.83	-58.01	4.92	-53.09
10	38603.11	33.29 AV	54	-20.71	-66.89	4.92	-61.97

Note: Margin value = Emission Level - Limit value

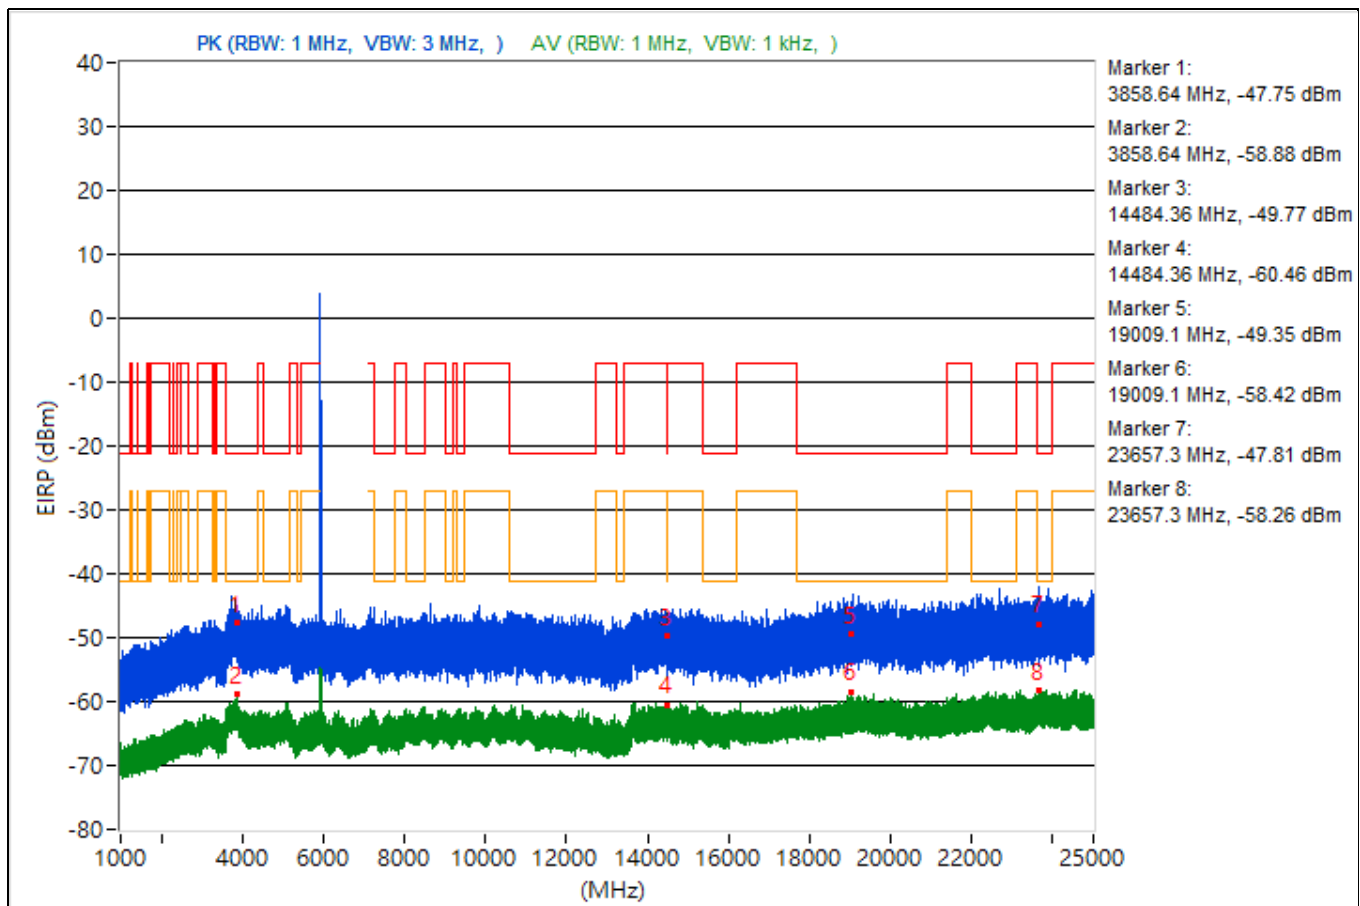


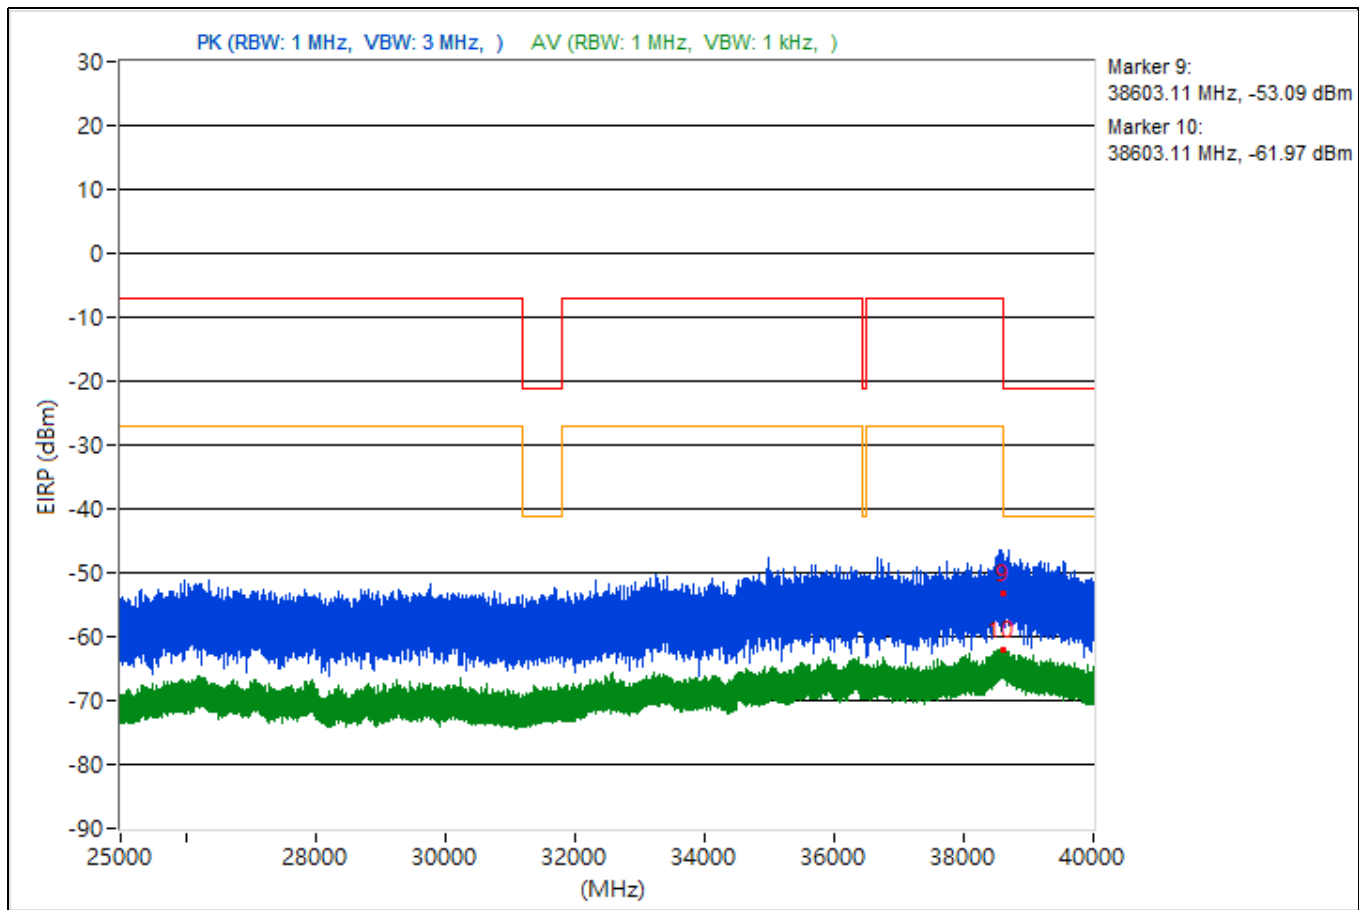


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3739.8	47.67 PK	74	-26.33	-52.51	4.92	-47.59
2	3739.8	35.69 AV	54	-18.31	-64.49	4.92	-59.57
3	15359.2	42.14 PK	74	-31.86	-58.04	4.92	-53.12
4	15359.2	34.73 AV	54	-19.27	-65.45	4.92	-60.53
5	19113.4	47.43 PK	74	-26.57	-52.75	4.92	-47.83
6	19113.4	36.93 AV	54	-17.07	-63.25	4.92	-58.33
7	23647.3	49.99 PK	74	-24.01	-50.19	4.92	-45.27
8	23647.3	37.59 AV	54	-16.41	-62.59	4.92	-57.67
9	38613.78	37.89 PK	74	-36.11	-62.29	4.92	-57.37
10	38613.78	33.88 AV	54	-20.12	-66.3	4.92	-61.38

Note: Margin value = Emission Level - Limit value

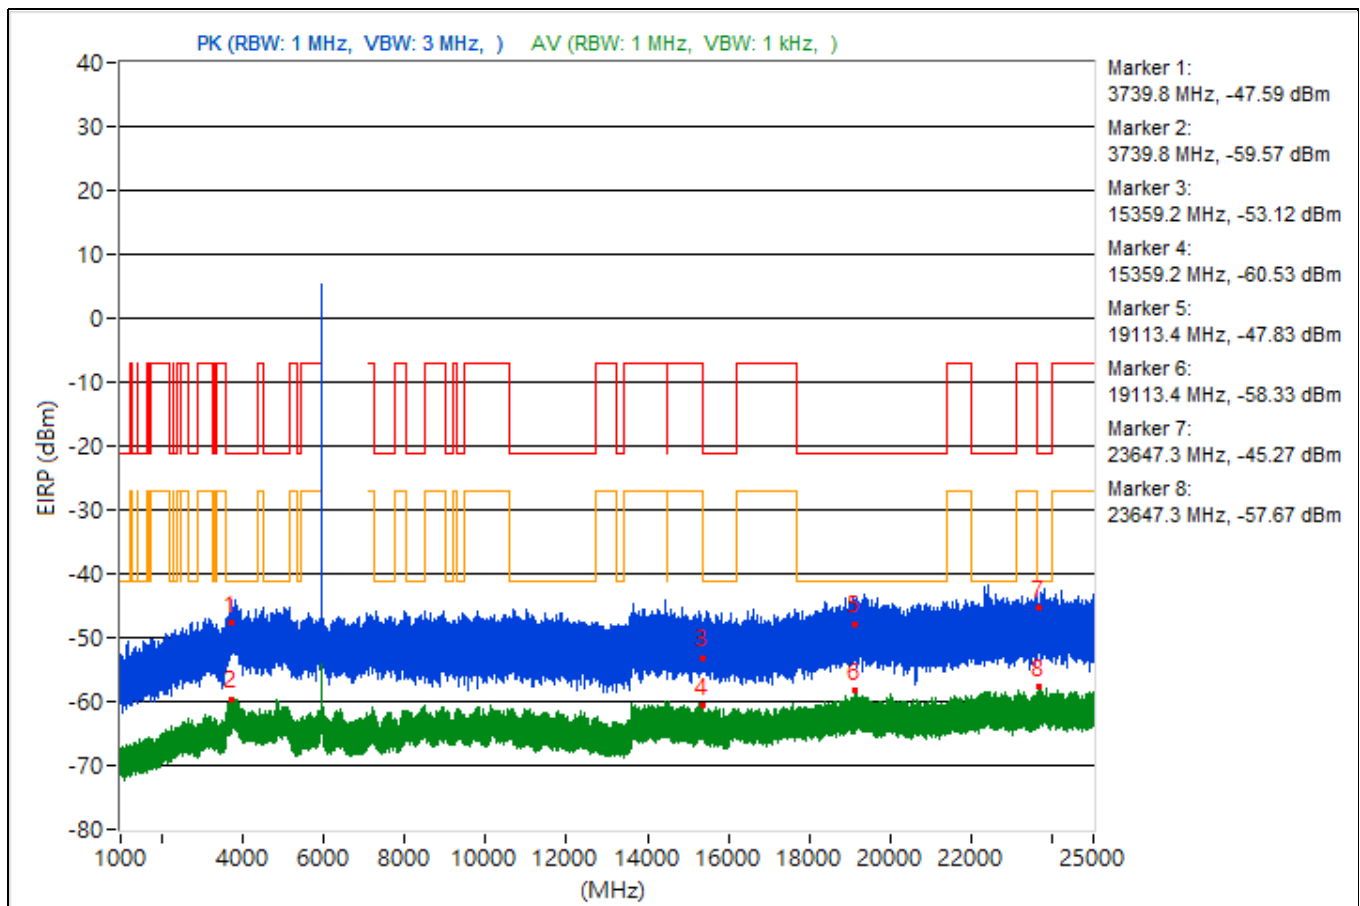


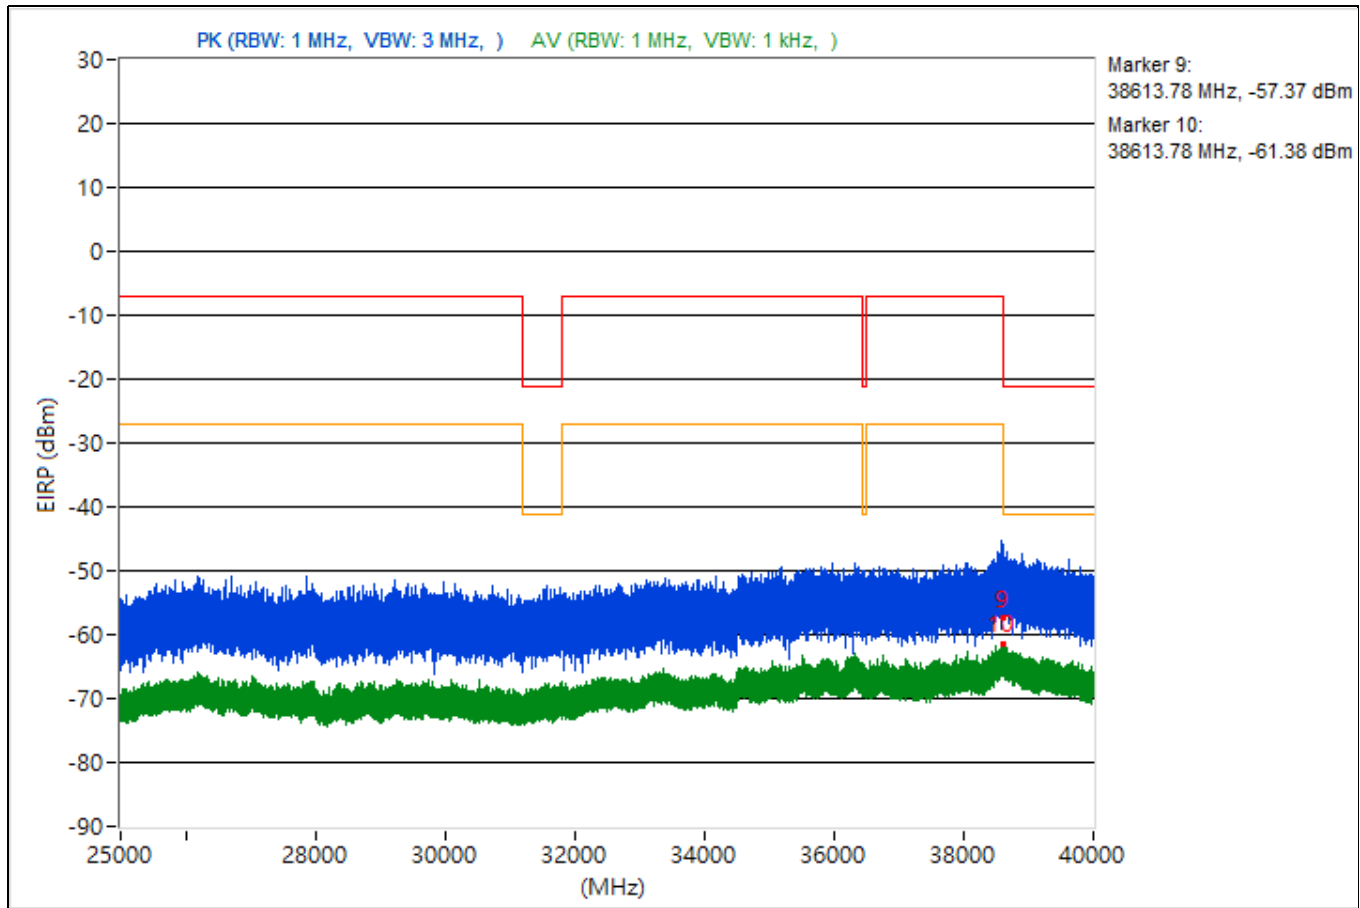


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3788.57	44.08 PK	74	-29.92	-56.1	4.92	-51.18
2	3788.57	36.06 AV	54	-17.94	-64.12	4.92	-59.2
3	9079.91	42.18 PK	74	-31.82	-58	4.92	-53.08
4	9079.91	34.88 AV	54	-19.12	-65.3	4.92	-60.38
5	19318.3	47.62 PK	74	-26.38	-52.56	4.92	-47.64
6	19318.3	36.63 AV	54	-17.37	-63.55	4.92	-58.63
7	23671.3	45.03 PK	74	-28.97	-55.15	4.92	-50.23
8	23671.3	38.19 AV	54	-15.81	-61.99	4.92	-57.07
9	38611.64	41.16 PK	74	-32.84	-59.02	4.92	-54.1
10	38611.64	34.09 AV	54	-19.91	-66.09	4.92	-61.17

Note: Margin value = Emission Level - Limit value

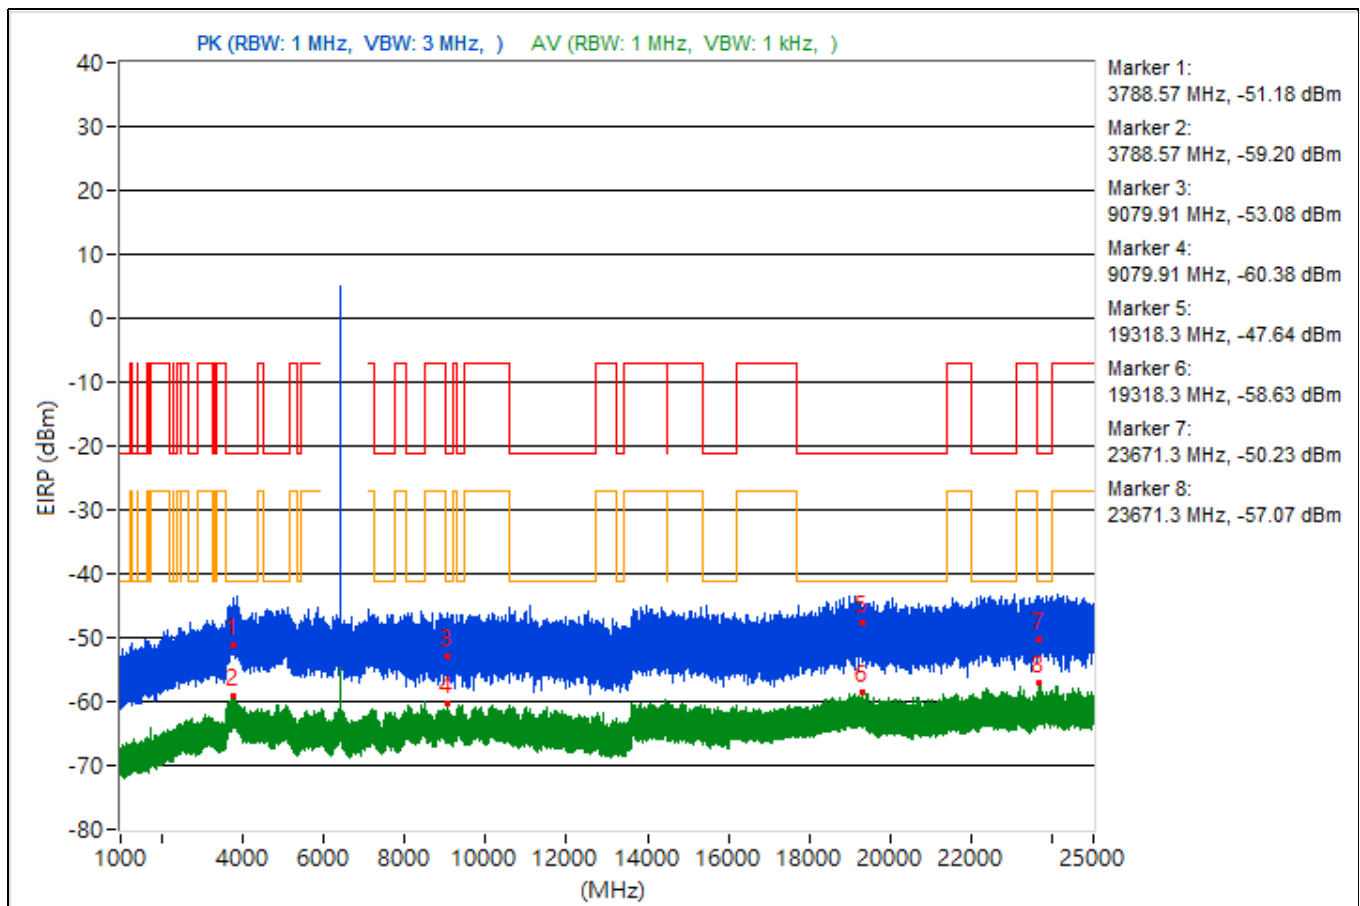


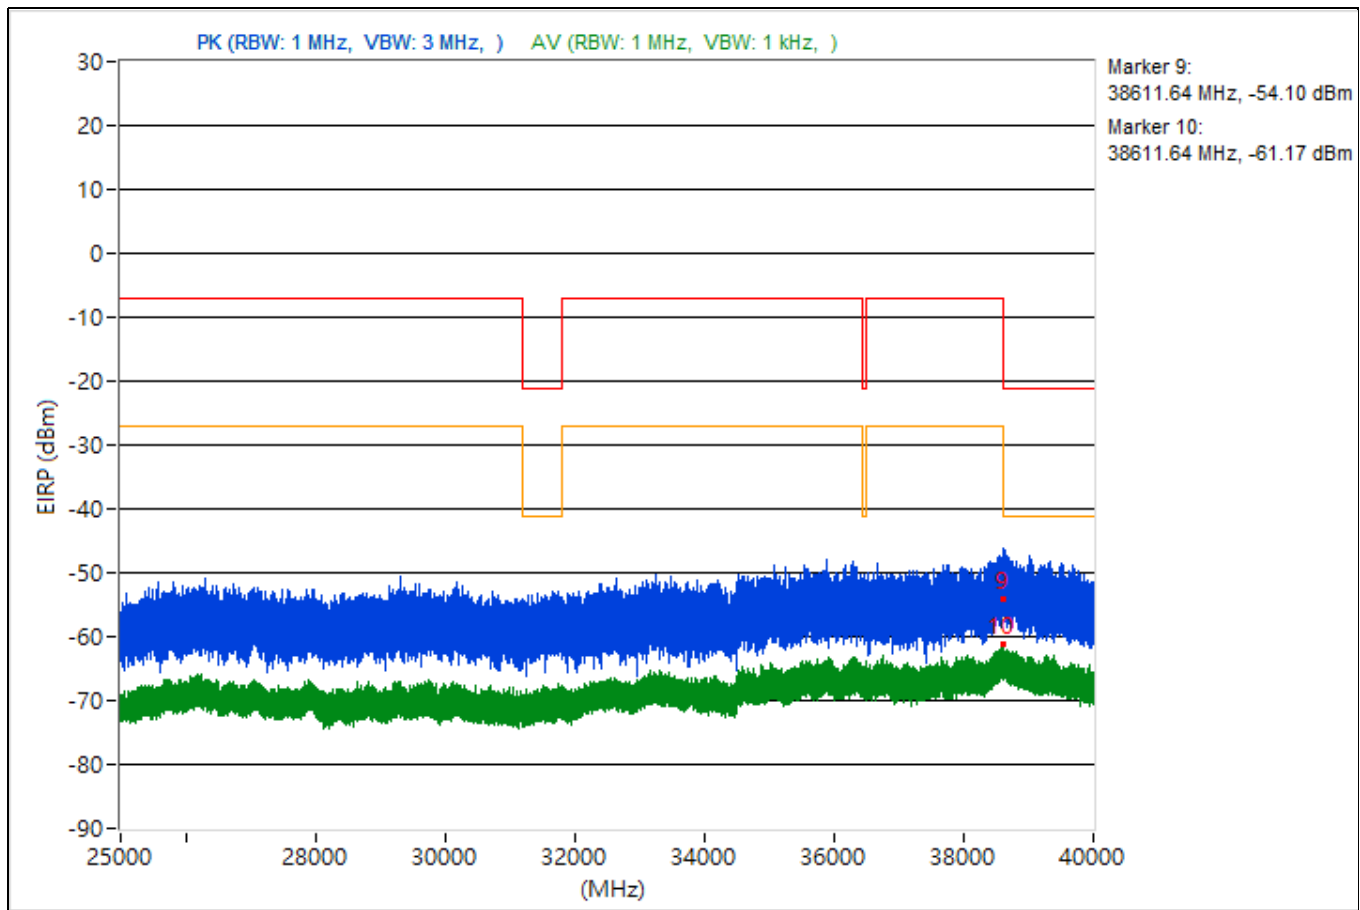


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3748.2	48.59 PK	74	-25.41	-51.59	4.92	-46.67
2	3748.2	35.93 AV	54	-18.07	-64.25	4.92	-59.33
3	14479.11	46.71 PK	74	-27.29	-53.47	4.92	-48.55
4	14479.11	34.81 AV	54	-19.19	-65.37	4.92	-60.45
5	19153.8	48.23 PK	74	-25.77	-51.95	4.92	-47.03
6	19153.8	36.37 AV	54	-17.63	-63.81	4.92	-58.89
7	22402.2	45.08 PK	74	-28.92	-55.1	4.92	-50.18
8	22402.2	37.19 AV	54	-16.81	-62.99	4.92	-58.07
9	38606.84	46.88 PK	74	-27.12	-53.3	4.92	-48.38
10	38606.84	33.76 AV	54	-20.24	-66.42	4.92	-61.5

Note: Margin value = Emission Level - Limit value

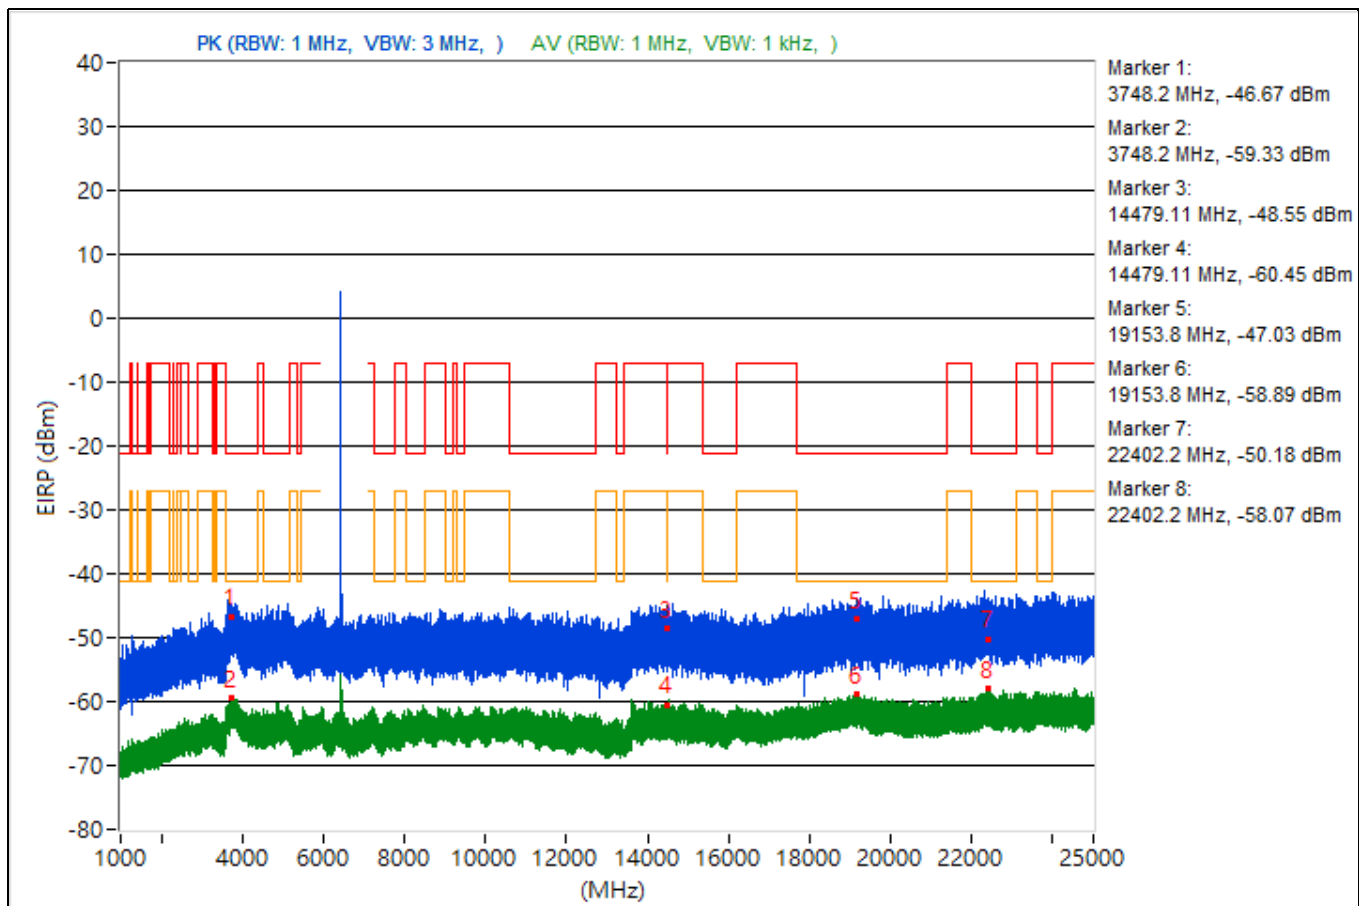


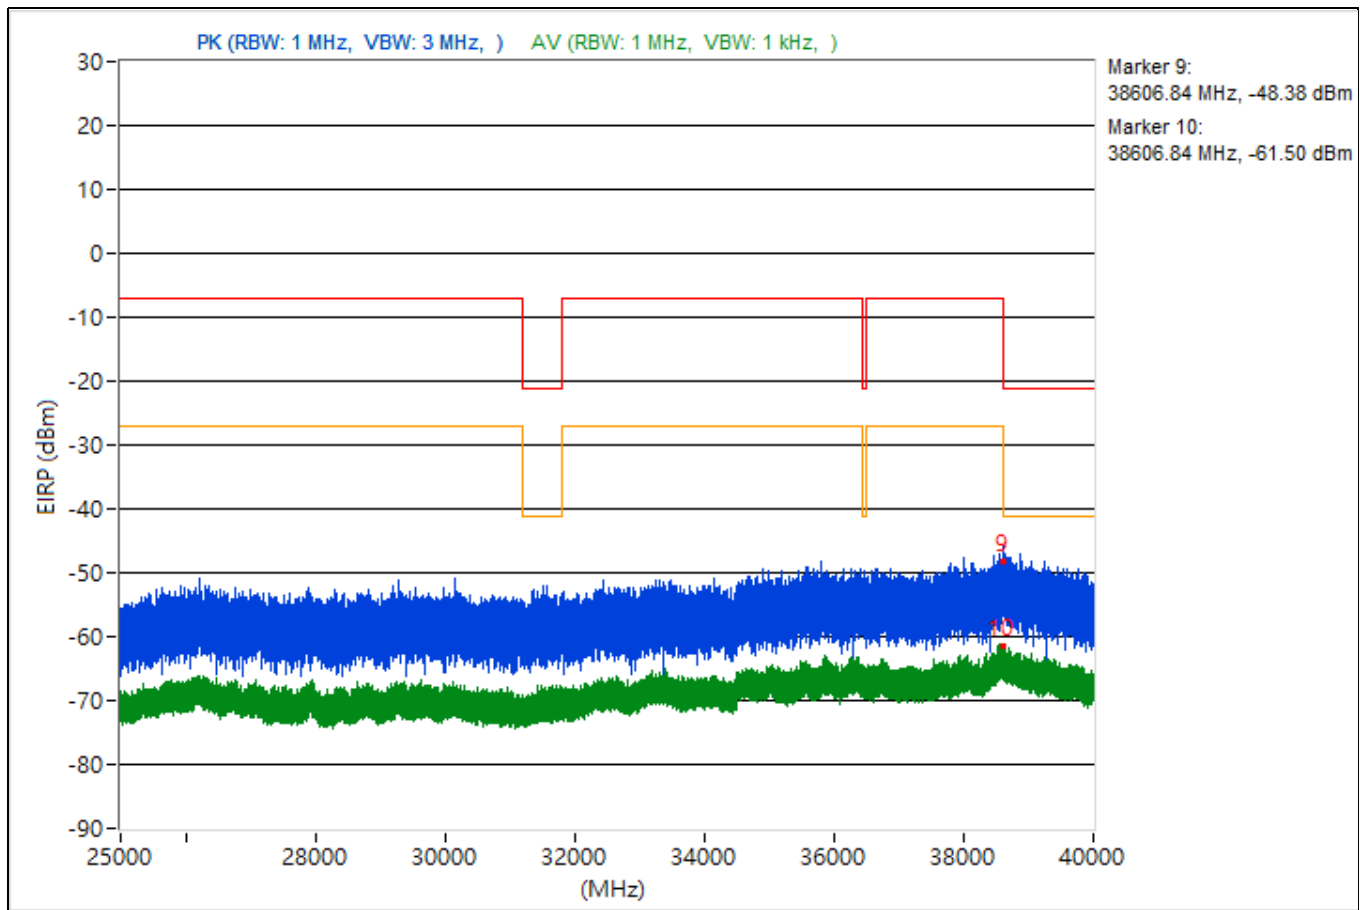


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3804.51	45.55 PK	74	-28.45	-54.63	4.92	-49.71
2	3804.51	35.53 AV	54	-18.47	-64.65	4.92	-59.73
3	14482.84	45.63 PK	74	-28.37	-54.55	4.92	-49.63
4	14482.84	34.93 AV	54	-19.07	-65.25	4.92	-60.33
5	19388.4	50.28 PK	74	-23.72	-49.9	4.92	-44.98
6	19388.4	36.37 AV	54	-17.63	-63.81	4.92	-58.89
7	22414.5	48.67 PK	74	-25.33	-51.51	4.92	-46.59
8	22414.5	37.68 AV	54	-16.32	-62.5	4.92	-57.58
9	38604.27	44.49 PK	74	-29.51	-55.69	4.92	-50.77
10	38604.27	33.44 AV	54	-20.56	-66.74	4.92	-61.82

Note: Margin value = Emission Level - Limit value

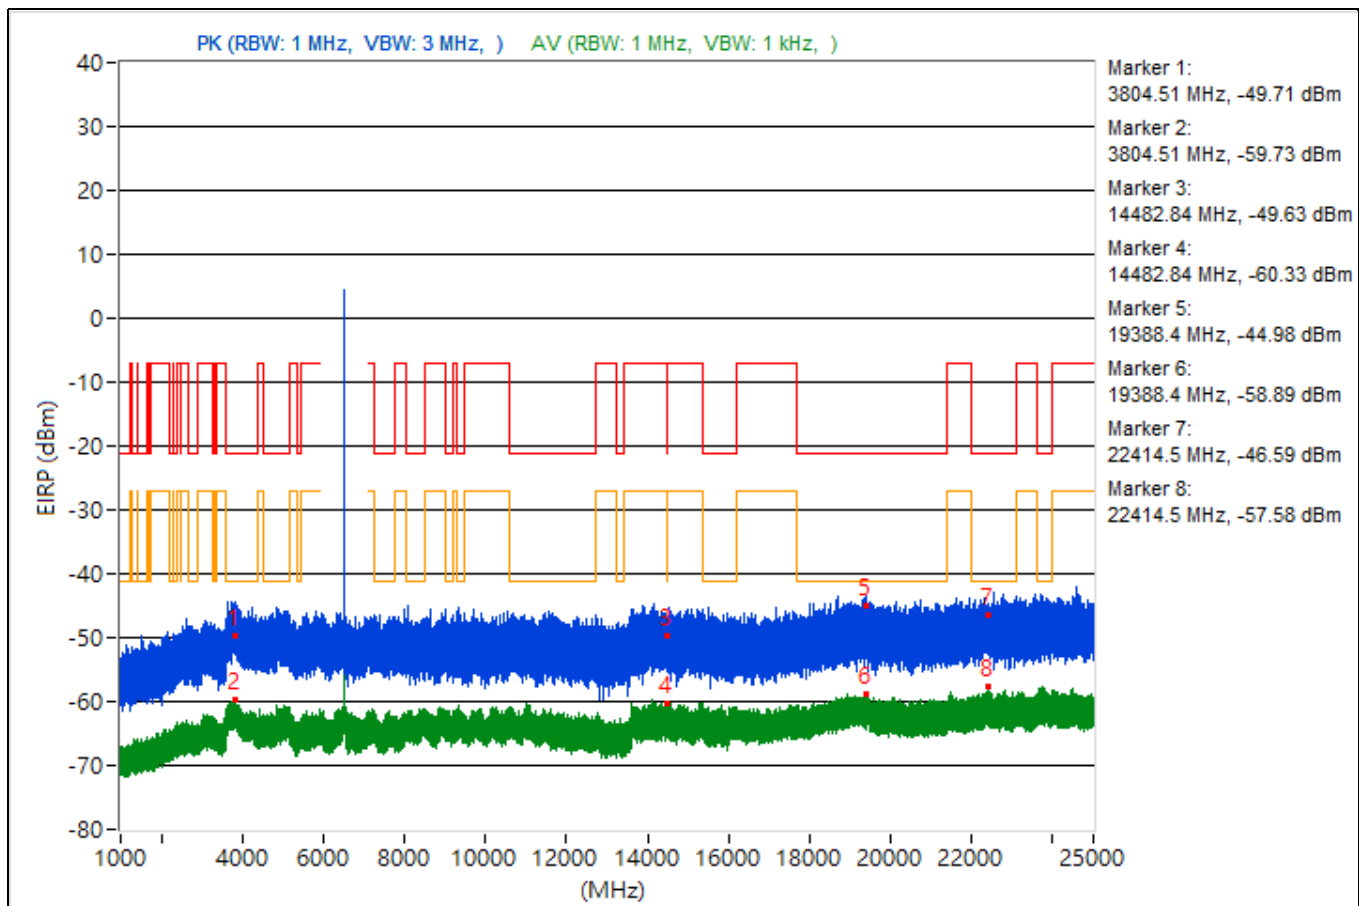


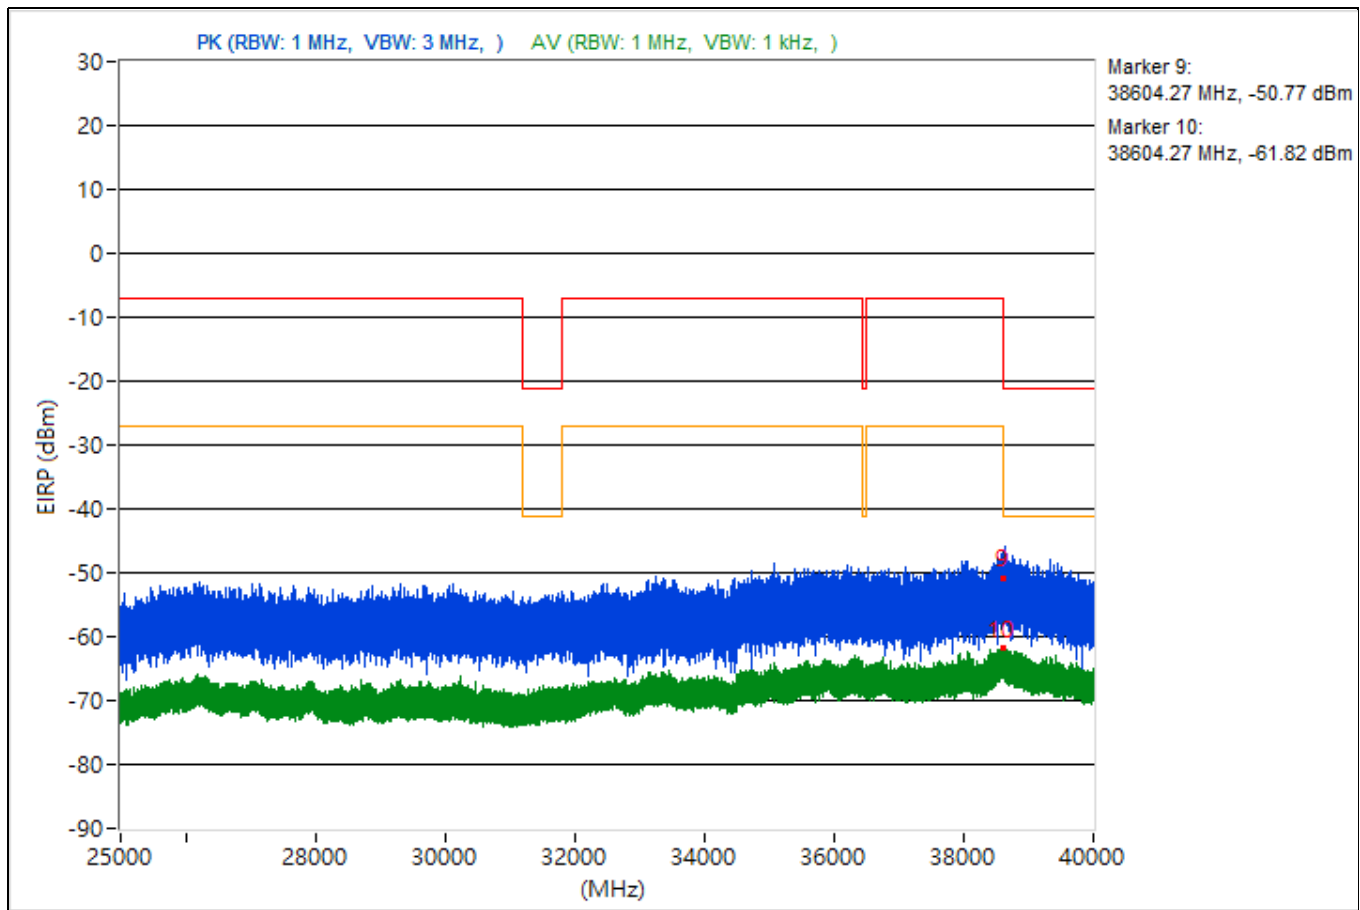


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3768.89	45.01 PK	74	-28.99	-55.17	4.92	-50.25
2	3768.89	36.31 AV	54	-17.69	-63.87	4.92	-58.95
3	14484.71	45.01 PK	74	-28.99	-55.17	4.92	-50.25
4	14484.71	35.5 AV	54	-18.5	-64.68	4.92	-59.76
5	19137	45.94 PK	74	-28.06	-54.24	4.92	-49.32
6	19137	36.69 AV	54	-17.31	-63.49	4.92	-58.57
7	23630.9	49.81 PK	74	-24.19	-50.37	4.92	-45.45
8	23630.9	37.13 AV	54	-16.87	-63.05	4.92	-58.13
9	38602.93	43.69 PK	74	-30.31	-56.49	4.92	-51.57
10	38602.93	34.36 AV	54	-19.64	-65.82	4.92	-60.9

Note: Margin value = Emission Level - Limit value

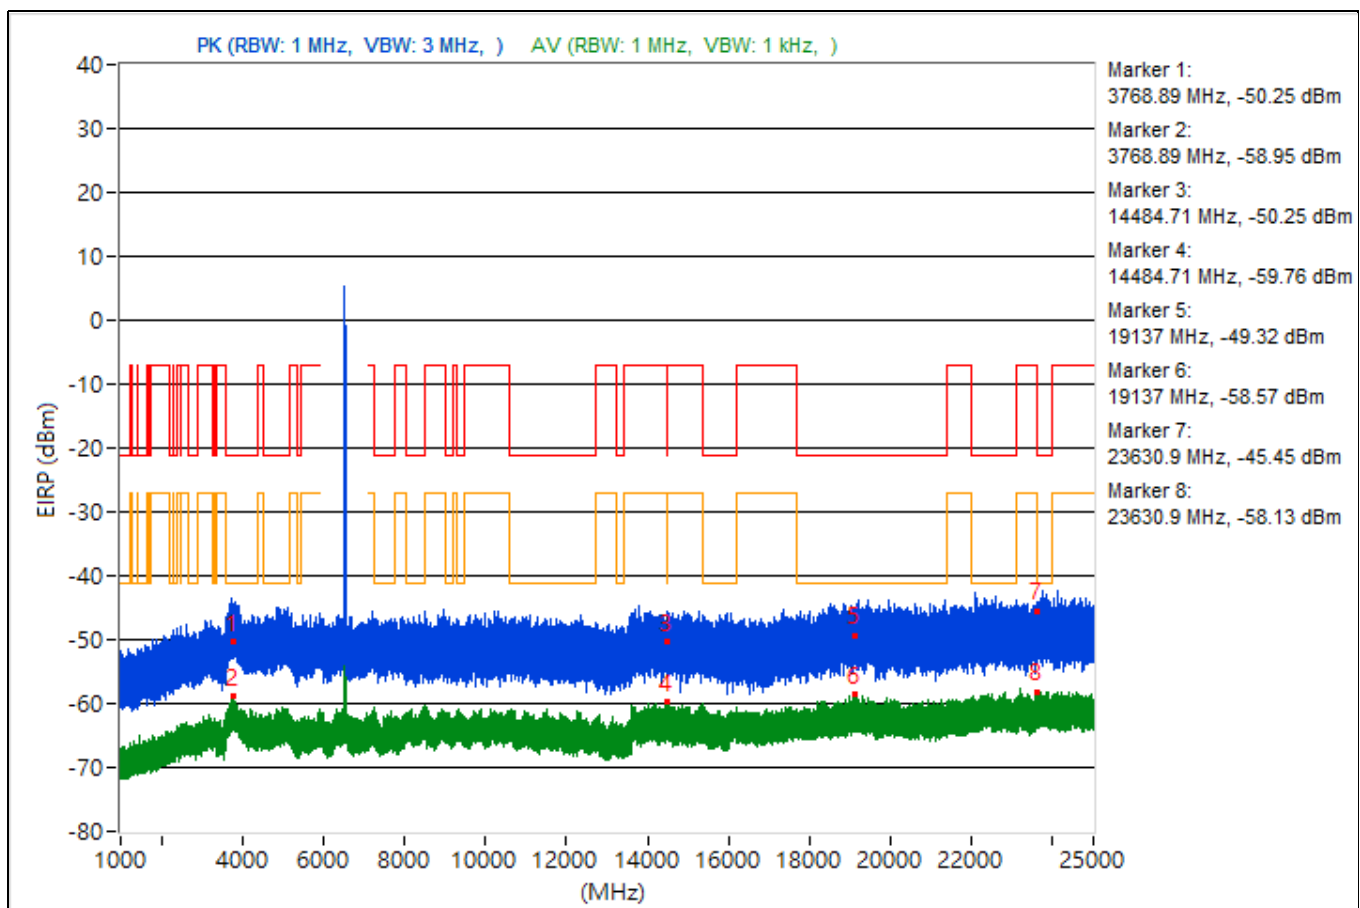


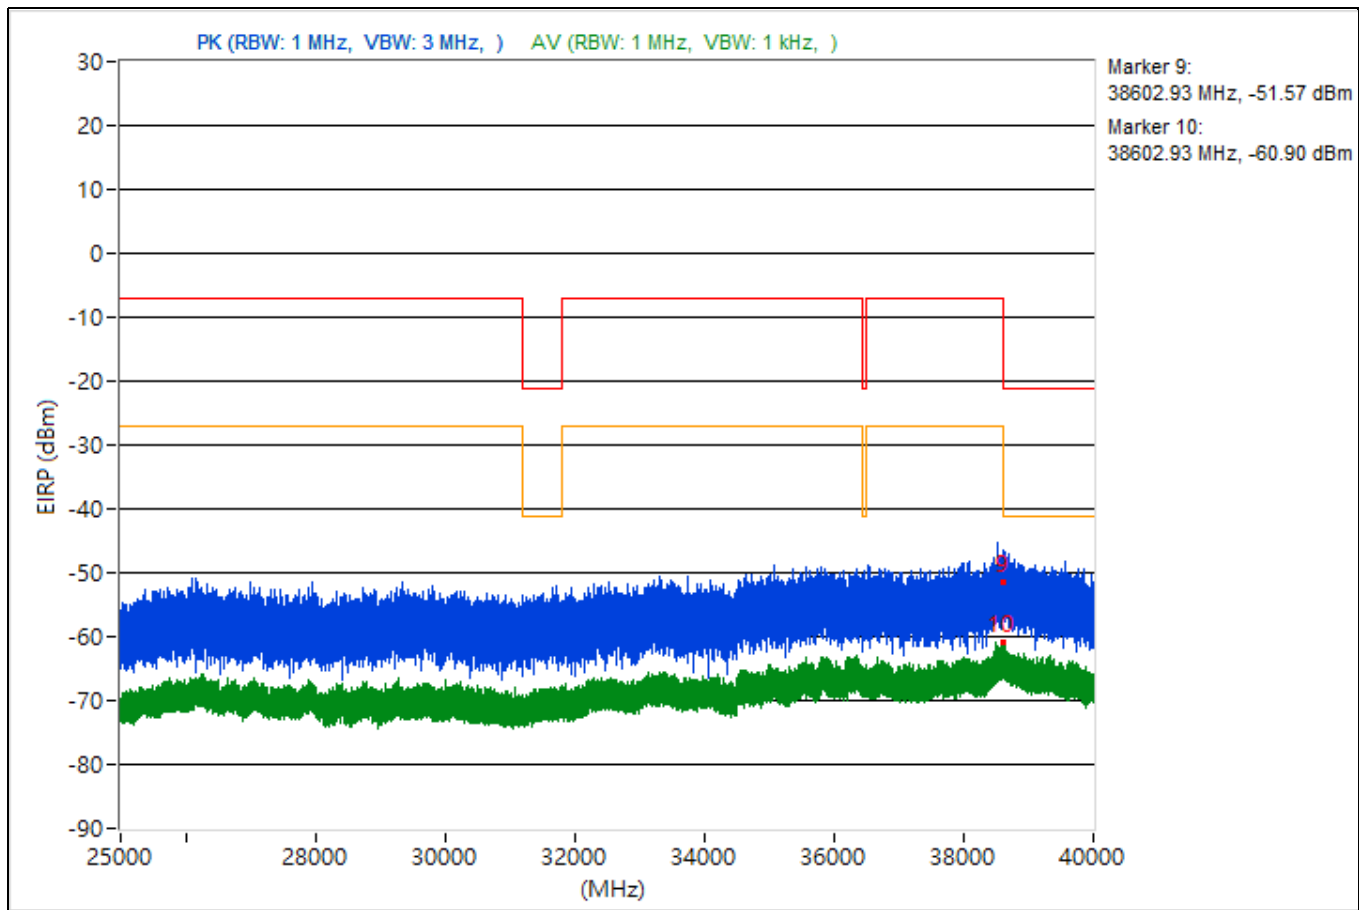


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3802.41	43.33 PK	74	-30.67	-56.85	4.92	-51.93
2	3802.41	36.93 AV	54	-17.07	-63.25	4.92	-58.33
3	14485.24	44.9 PK	74	-29.1	-55.28	4.92	-50.36
4	14485.24	35.19 AV	54	-18.81	-64.99	4.92	-60.07
5	19090.3	46.93 PK	74	-27.07	-53.25	4.92	-48.33
6	19090.3	36.34 AV	54	-17.66	-63.84	4.92	-58.92
7	23715.5	48.07 PK	74	-25.93	-52.11	4.92	-47.19
8	23715.5	37.13 AV	54	-16.87	-63.05	4.92	-58.13
9	38605.24	44.64 PK	74	-29.36	-55.54	4.92	-50.62
10	38605.24	33.71 AV	54	-20.29	-66.47	4.92	-61.55

Note: Margin value = Emission Level - Limit value

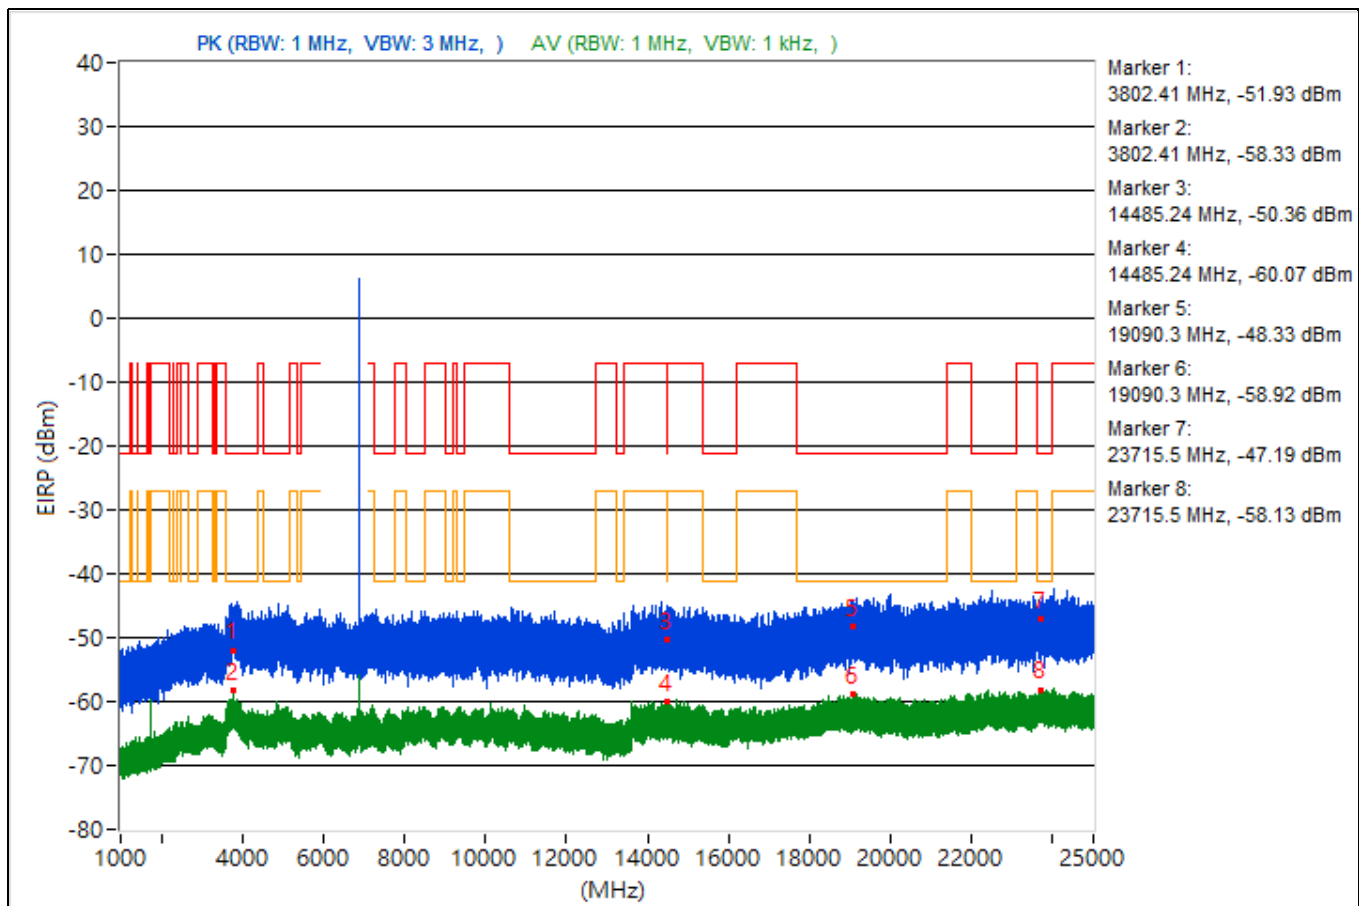


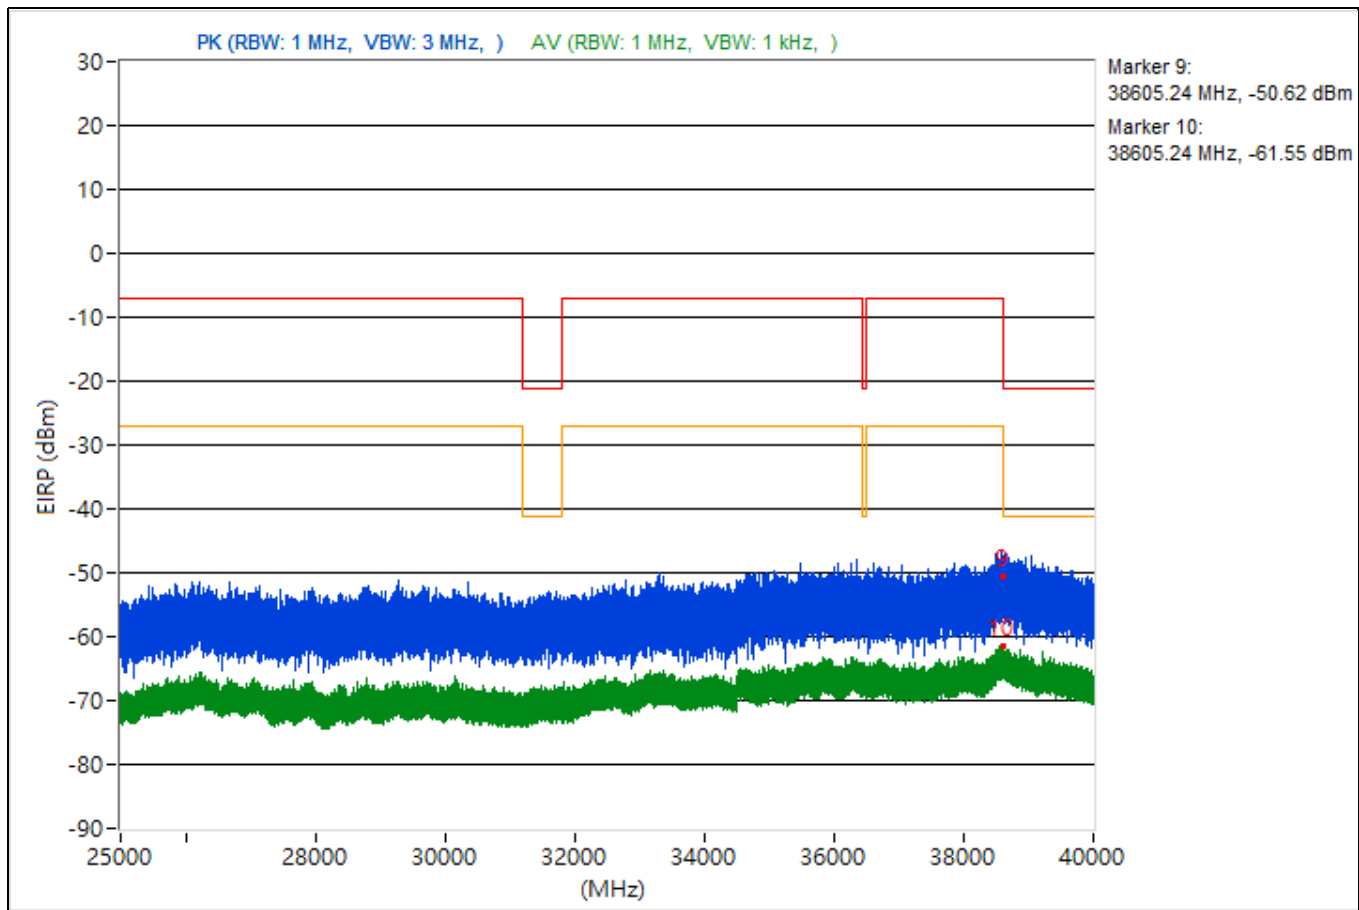


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3808.94	46.11 PK	74	-27.89	-54.07	4.92	-49.15
2	3808.94	36.28 AV	54	-17.72	-63.9	4.92	-58.98
3	15388.89	46.21 PK	74	-27.79	-53.97	4.92	-49.05
4	15388.89	34.76 AV	54	-19.24	-65.42	4.92	-60.5
5	19125.8	47.66 PK	74	-26.34	-52.52	4.92	-47.6
6	19125.8	36.76 AV	54	-17.24	-63.42	4.92	-58.5
7	23728.7	48.36 PK	74	-25.64	-51.82	4.92	-46.9
8	23728.7	37.79 AV	54	-16.21	-62.39	4.92	-57.47
9	38600.44	43.59 PK	74	-30.41	-56.59	4.92	-51.67
10	38600.44	34.13 AV	54	-19.87	-66.05	4.92	-61.13

Note: Margin value = Emission Level - Limit value

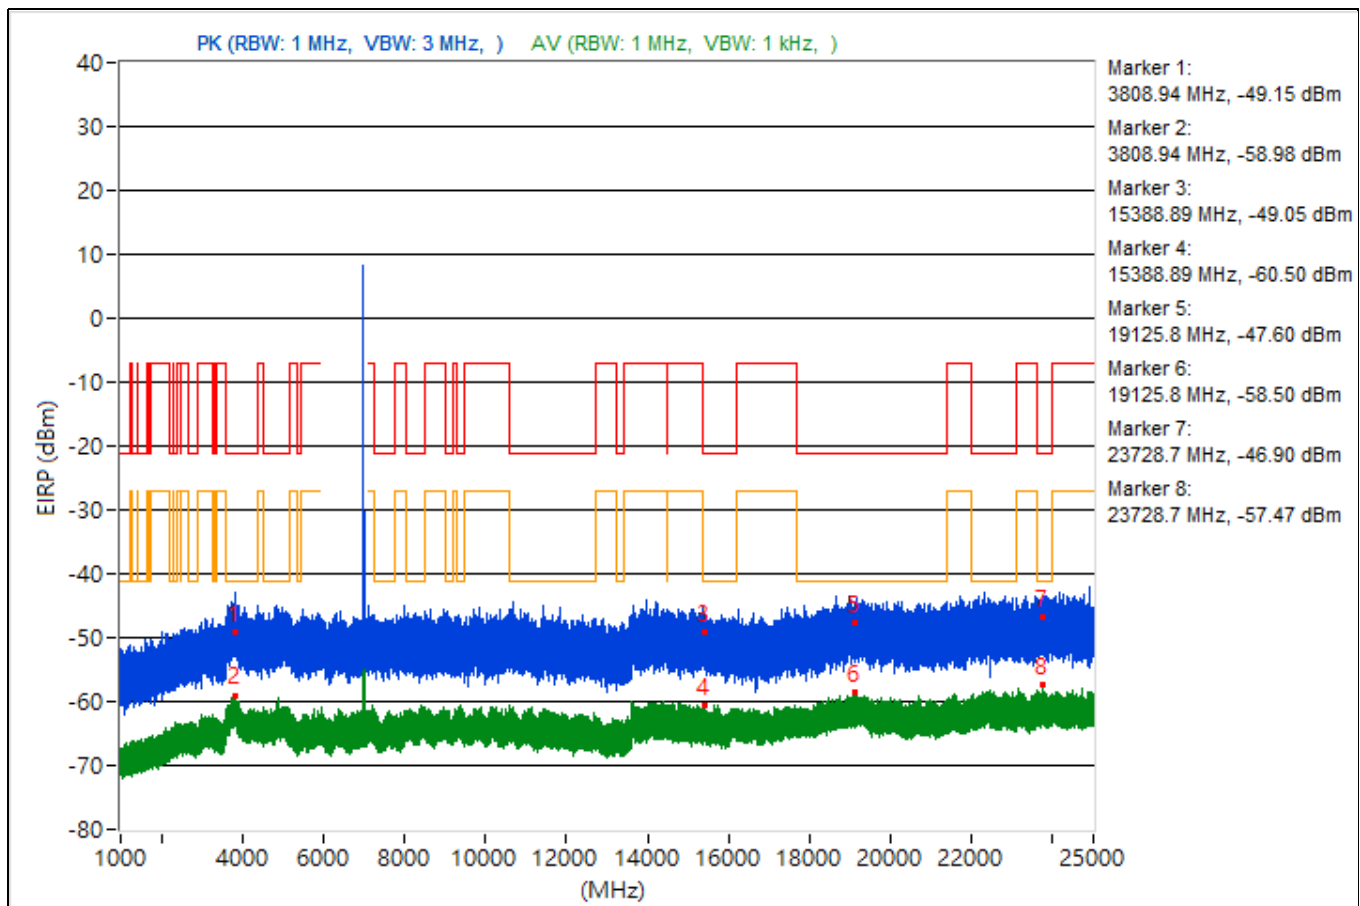


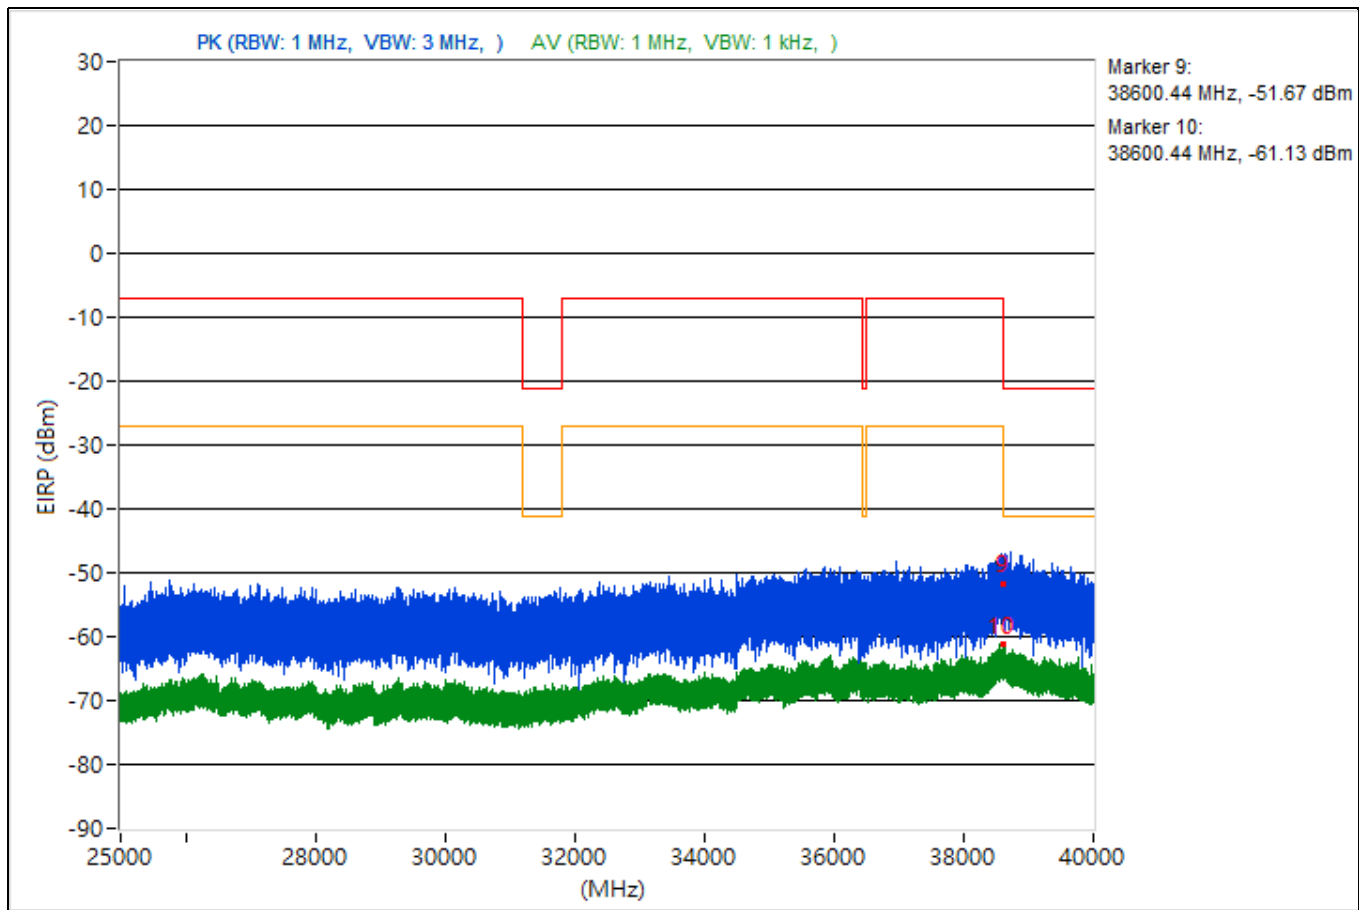


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3702.54	43.66 PK	74	-30.34	-56.52	4.92	-51.6
2	3702.54	35.69 AV	54	-18.31	-64.49	4.92	-59.57
3	10670.76	44.2 PK	74	-29.8	-55.98	4.92	-51.06
4	10670.76	34.89 AV	54	-19.11	-65.29	4.92	-60.37
5	19160.8	45.63 PK	74	-28.37	-54.55	4.92	-49.63
6	19160.8	37.21 AV	54	-16.79	-62.97	4.92	-58.05
7	22764.5	47.97 PK	74	-26.03	-52.21	4.92	-47.29
8	22764.5	37.35 AV	54	-16.65	-62.83	4.92	-57.91
9	38623.73	44.98 PK	74	-29.02	-55.2	4.92	-50.28
10	38623.73	34.07 AV	54	-19.93	-66.11	4.92	-61.19

Note: Margin value = Emission Level - Limit value

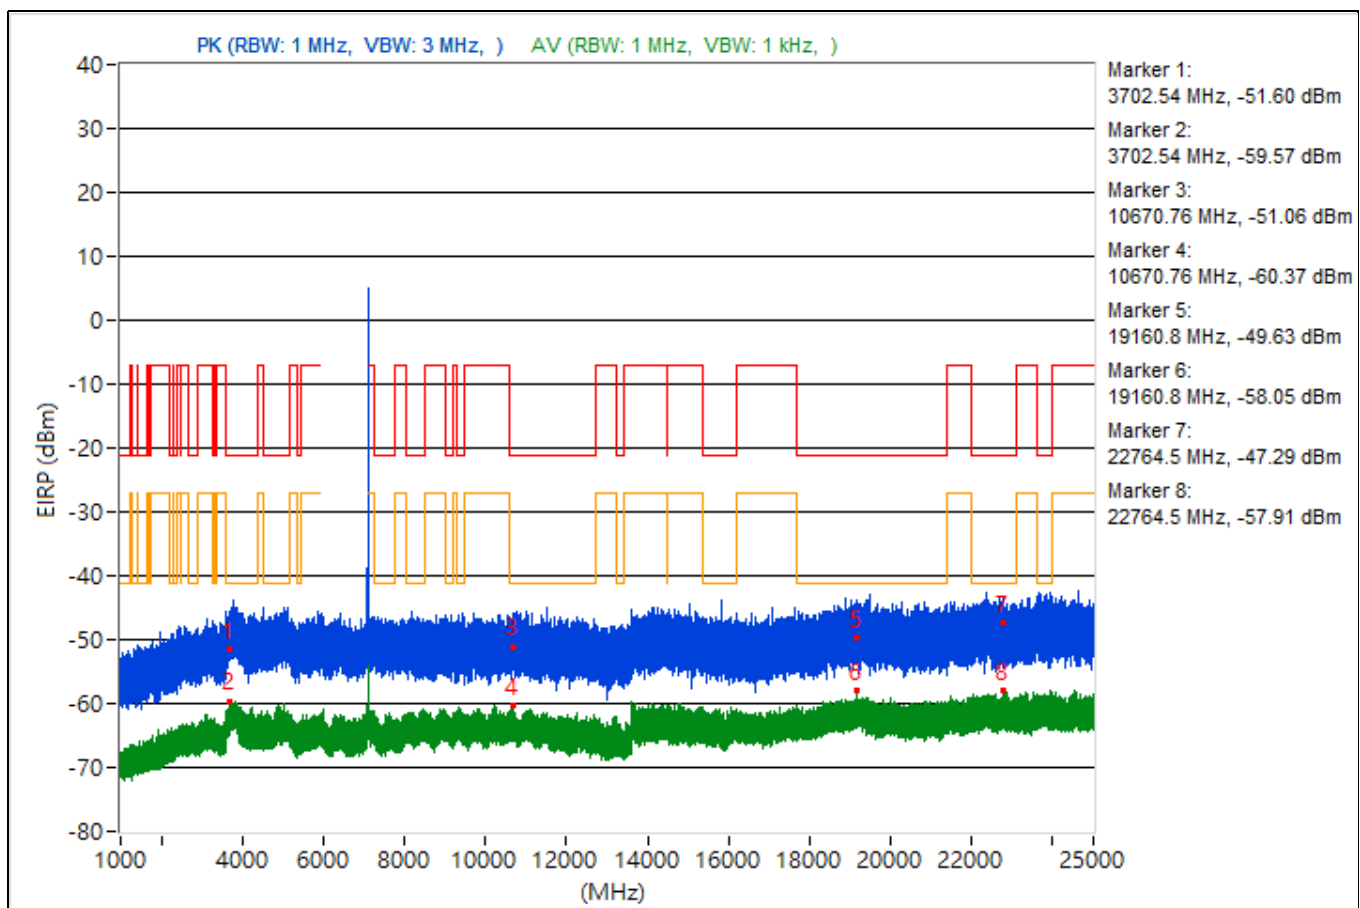


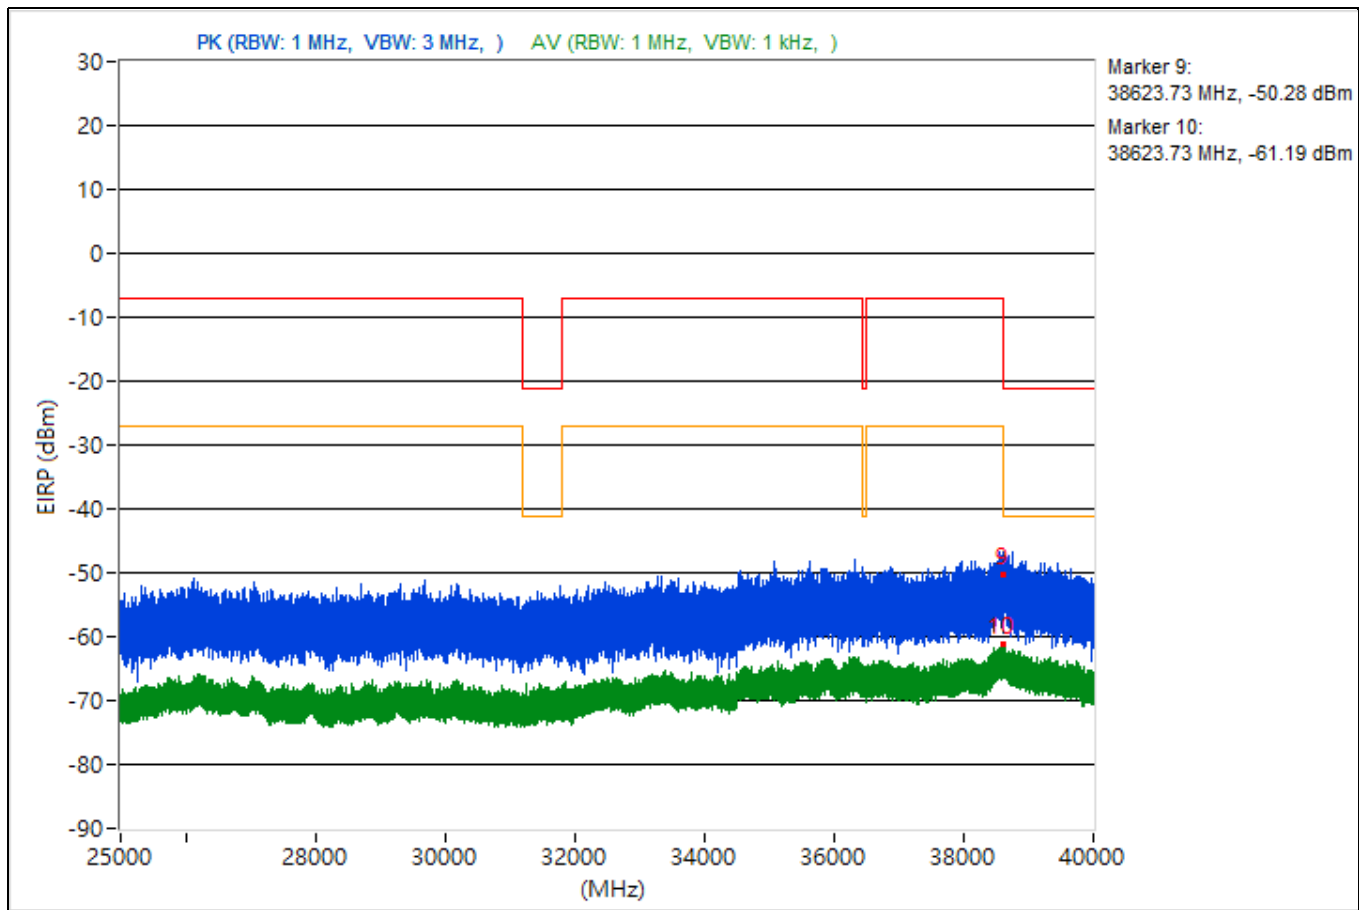


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3810.19	45.75 PK	74	-28.25	-54.43	4.92	-49.51
2	3810.19	36.54 AV	54	-17.46	-63.64	4.92	-58.72
3	8420.09	41.68 PK	74	-32.32	-58.5	4.92	-53.58
4	8420.09	34.89 AV	54	-19.11	-65.29	4.92	-60.37
5	19419.8	46.15 PK	74	-27.85	-54.03	4.92	-49.11
6	19419.8	36.45 AV	54	-17.55	-63.73	4.92	-58.81
7	22540.2	46.23 PK	74	-27.77	-53.95	4.92	-49.03
8	22540.2	37.45 AV	54	-16.55	-62.73	4.92	-57.81
9	38641.07	48.44 PK	74	-25.56	-51.74	4.92	-46.82
10	38641.07	34.05 AV	54	-19.95	-66.13	4.92	-61.21

Note: Margin value = Emission Level - Limit value

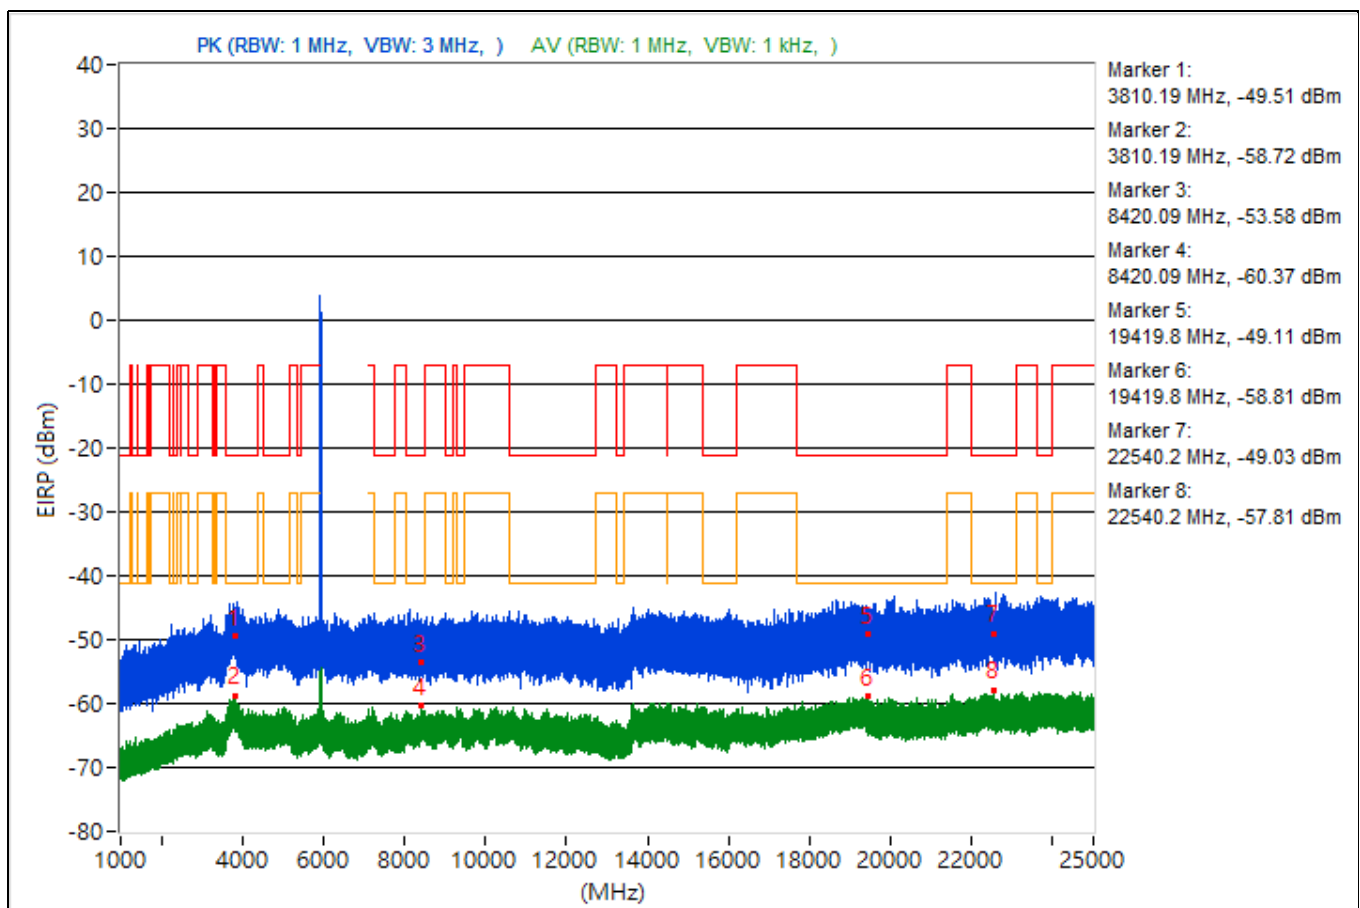


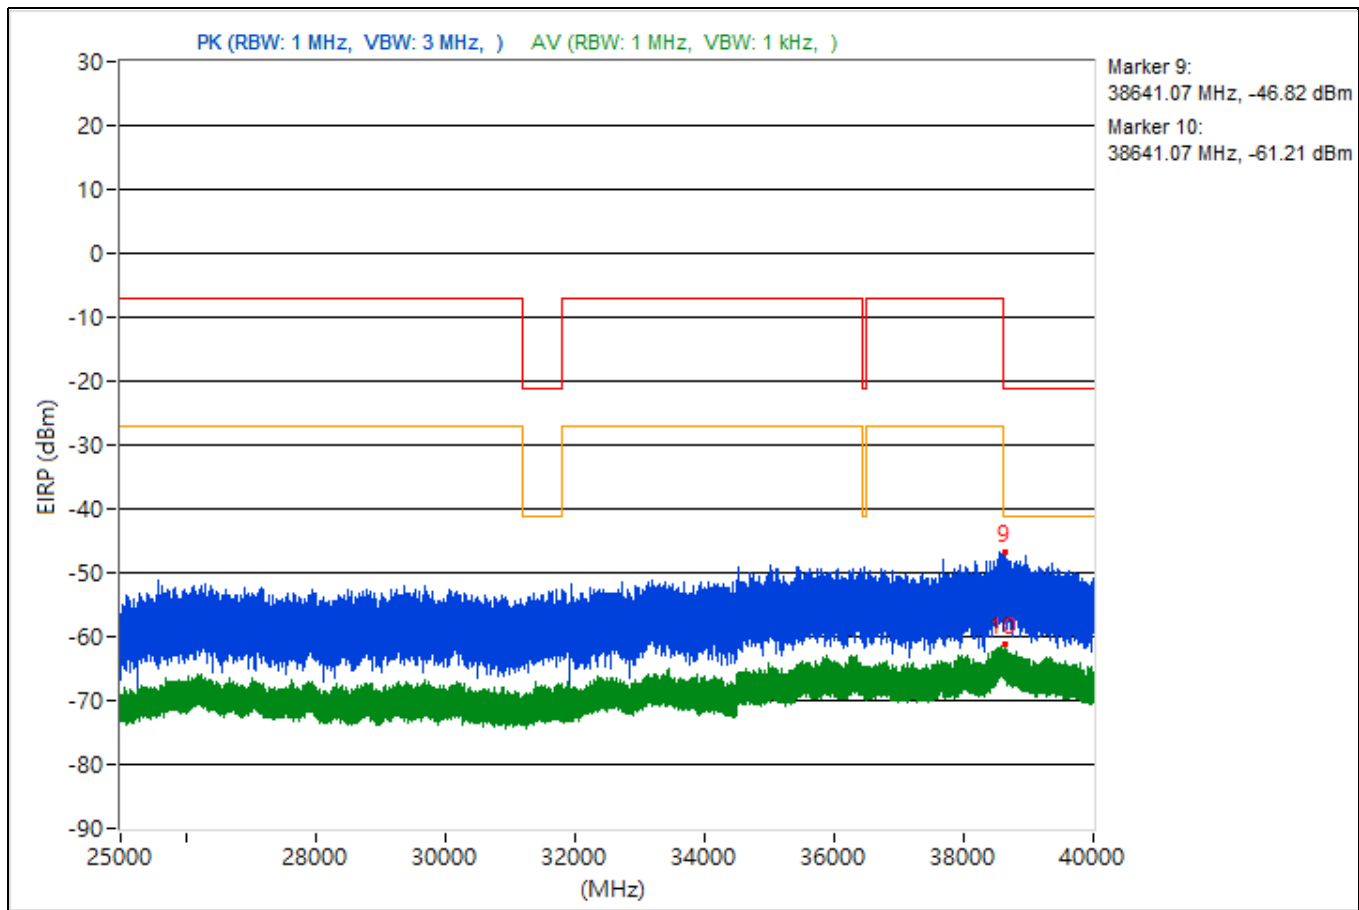


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3741.74	45.63 PK	74	-28.37	-54.55	4.92	-49.63
2	3741.74	36.31 AV	54	-17.69	-63.87	4.92	-58.95
3	15367.82	44.94 PK	74	-29.06	-55.24	4.92	-50.32
4	15367.82	34.89 AV	54	-19.11	-65.29	4.92	-60.37
5	19212.3	46.53 PK	74	-27.47	-53.65	4.92	-48.73
6	19212.3	36.51 AV	54	-17.49	-63.67	4.92	-58.75
7	23606.4	45.5 PK	74	-28.5	-54.68	4.92	-49.76
8	23606.4	37.43 AV	54	-16.57	-62.75	4.92	-57.83
9	38605.96	41.44 PK	74	-32.56	-58.74	4.92	-53.82
10	38605.96	33.91 AV	54	-20.09	-66.27	4.92	-61.35

Note: Margin value = Emission Level - Limit value

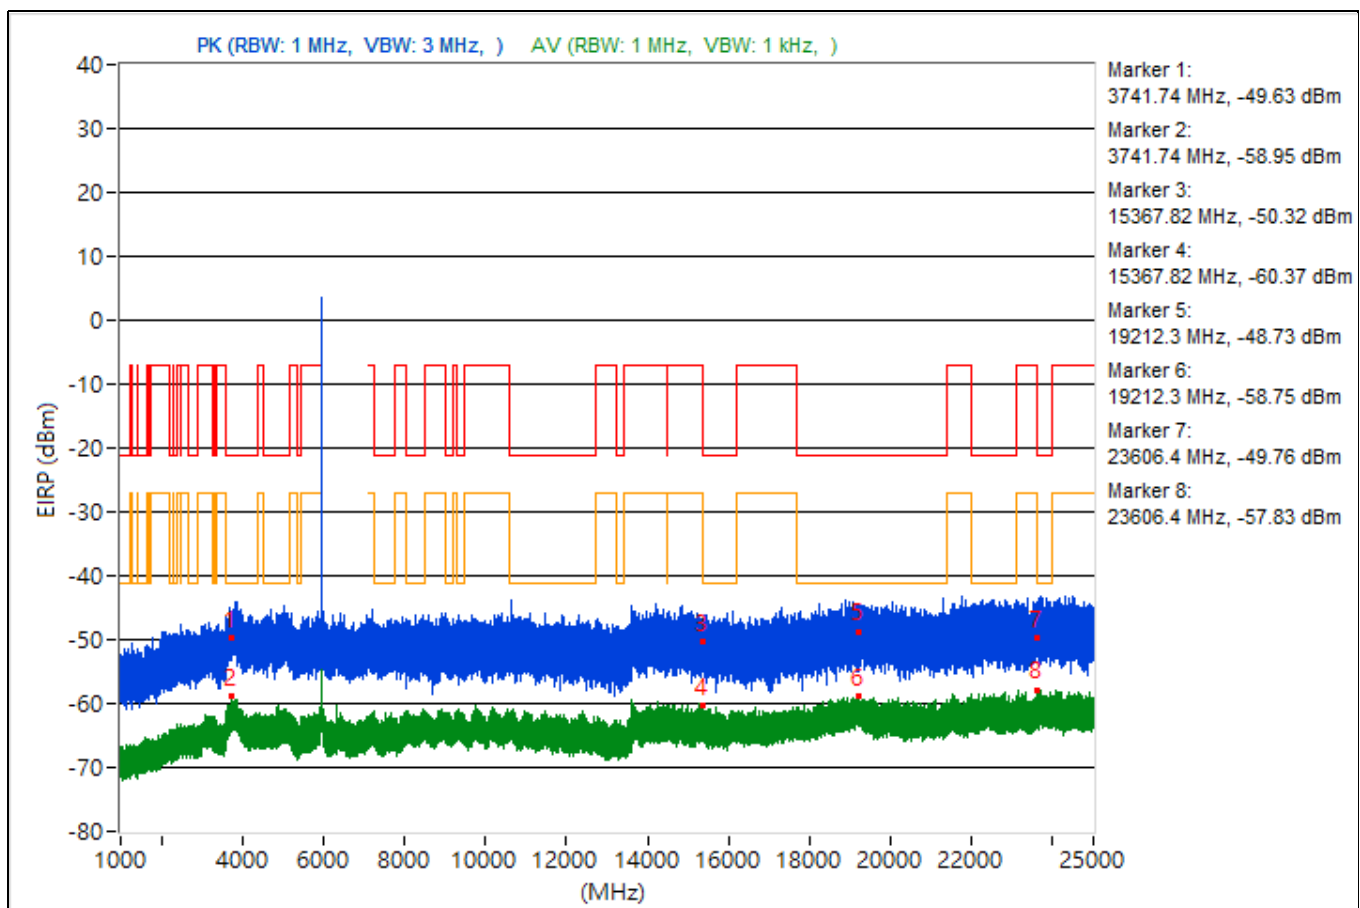


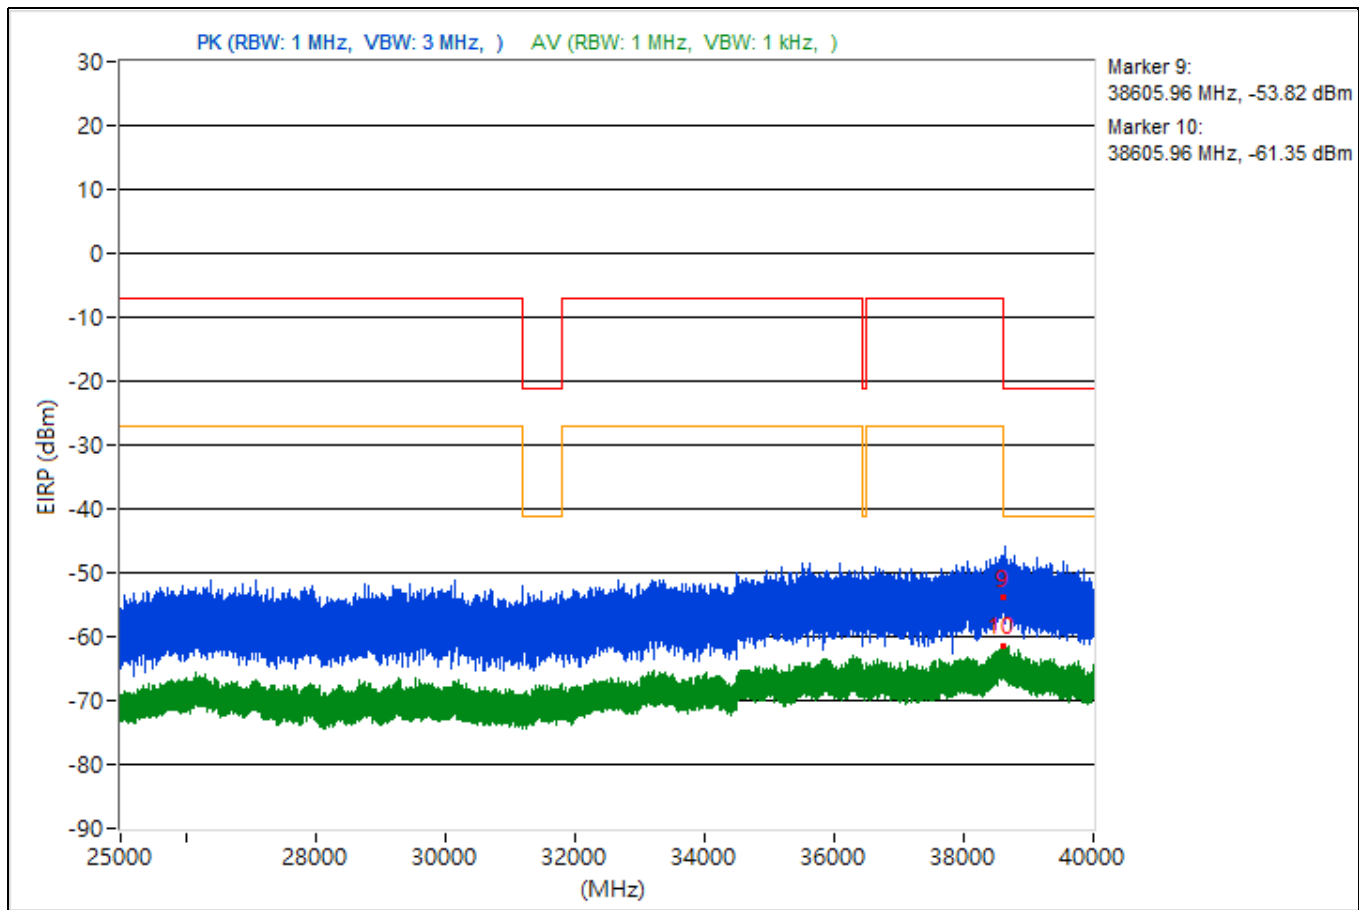


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3738.87	47.06 PK	74	-26.94	-53.12	4.92	-48.2
2	3738.87	36.3 AV	54	-17.7	-63.88	4.92	-58.96
3	14499.91	46.46 PK	74	-27.54	-53.72	4.92	-48.8
4	14499.91	35.04 AV	54	-18.96	-65.14	4.92	-60.22
5	19188.5	43.67 PK	74	-30.33	-56.51	4.92	-51.59
6	19188.5	36.97 AV	54	-17.03	-63.21	4.92	-58.29
7	23680.8	45.08 PK	74	-28.92	-55.1	4.92	-50.18
8	23680.8	37.5 AV	54	-16.5	-62.68	4.92	-57.76
9	38608.09	41.9 PK	74	-32.1	-58.28	4.92	-53.36
10	38608.09	34.42 AV	54	-19.58	-65.76	4.92	-60.84

Note: Margin value = Emission Level - Limit value

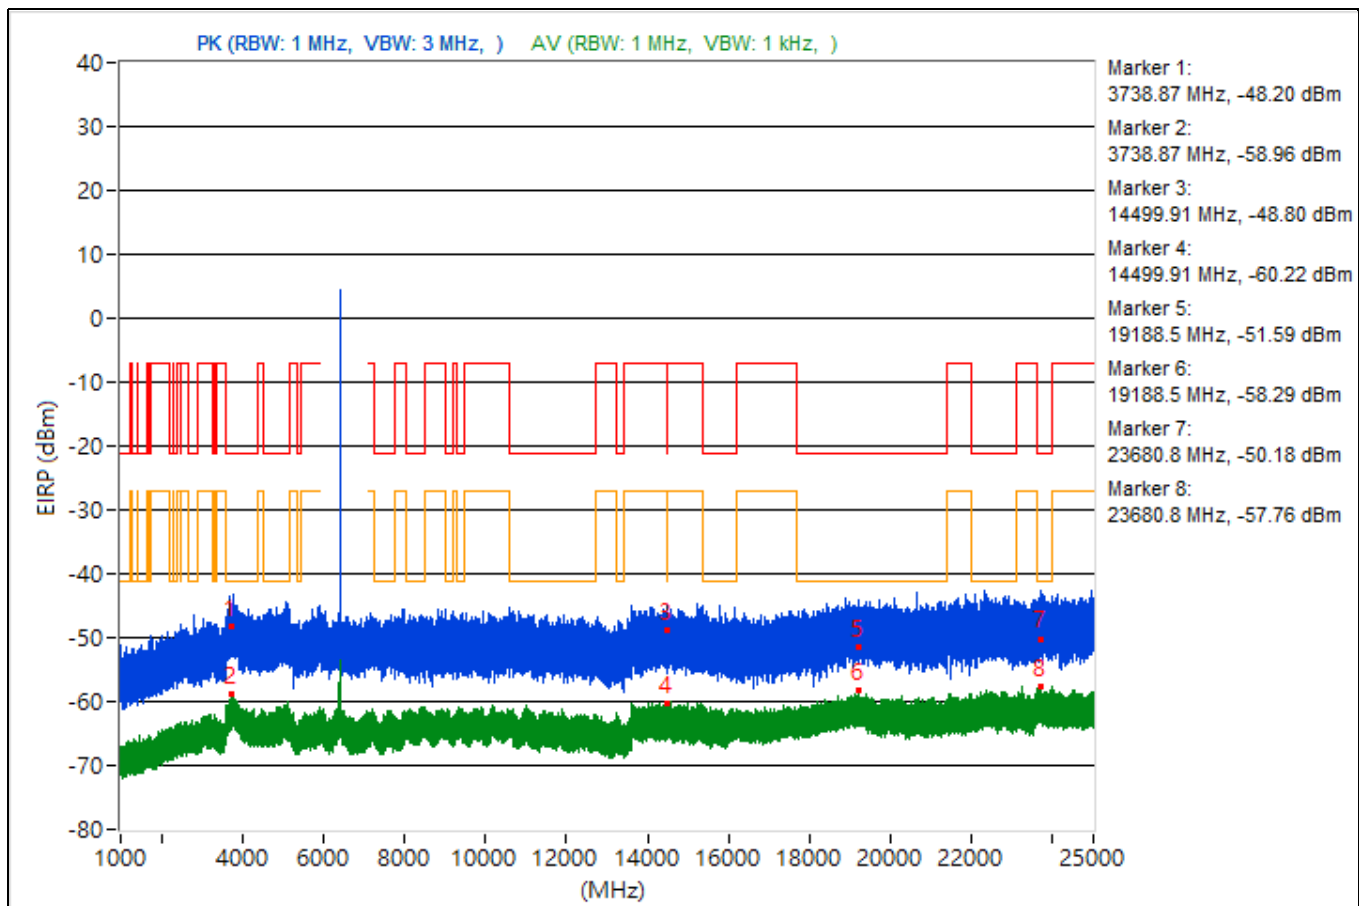


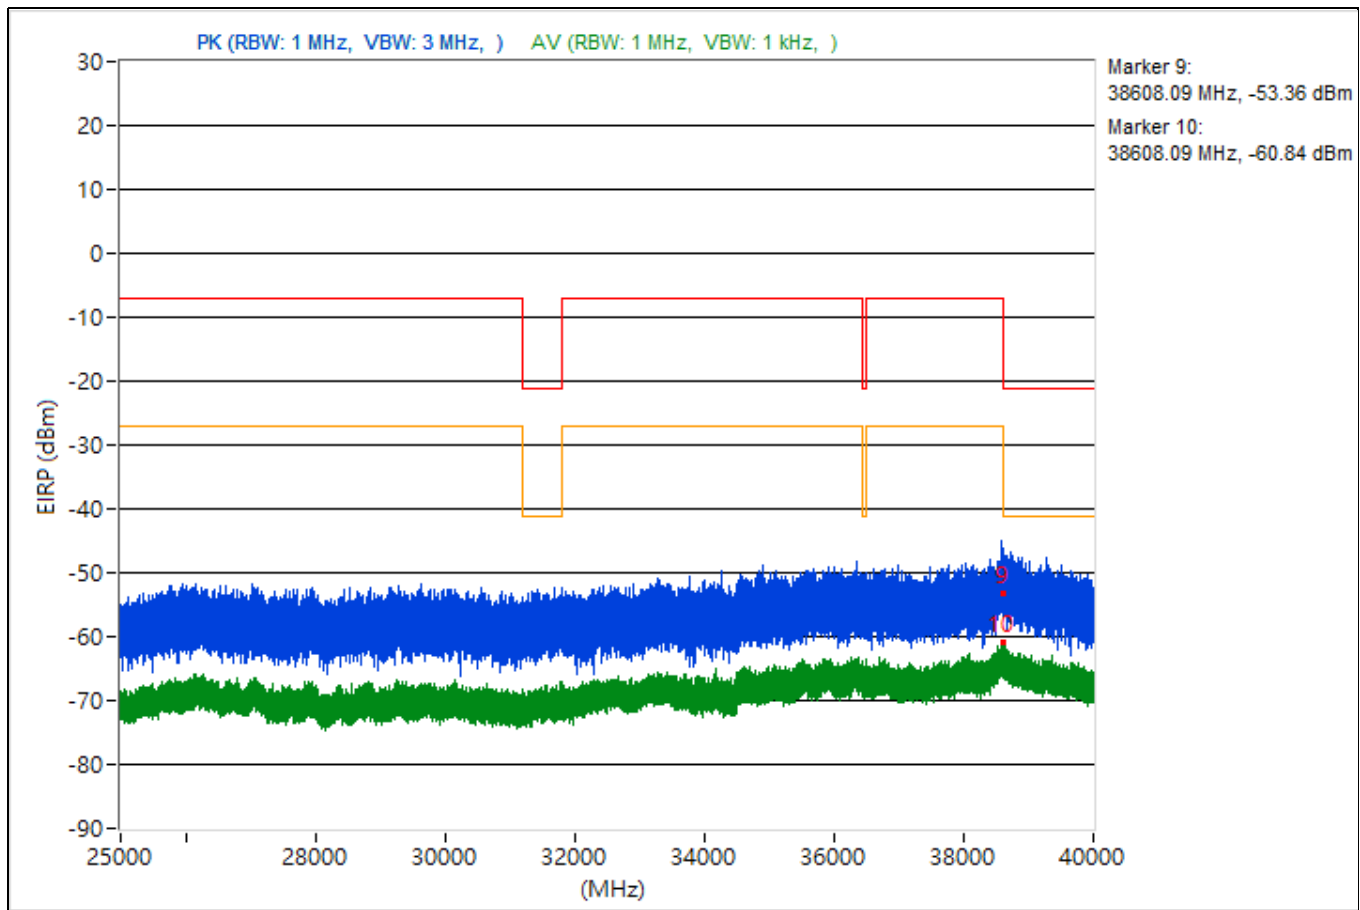


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3828.7	43.44 PK	74	-30.56	-56.74	4.92	-51.82
2	3828.7	35.81 AV	54	-18.19	-64.37	4.92	-59.45
3	14490.76	44.27 PK	74	-29.73	-55.91	4.92	-50.99
4	14490.76	35.31 AV	54	-18.69	-64.87	4.92	-59.95
5	19381.8	46.21 PK	74	-27.79	-53.97	4.92	-49.05
6	19381.8	36.41 AV	54	-17.59	-63.77	4.92	-58.85
7	22415.5	46.55 PK	74	-27.45	-53.63	4.92	-48.71
8	22415.5	37.24 AV	54	-16.76	-62.94	4.92	-58.02
9	38614.04	43.96 PK	74	-30.04	-56.22	4.92	-51.3
10	38614.04	34.64 AV	54	-19.36	-65.54	4.92	-60.62

Note: Margin value = Emission Level - Limit value

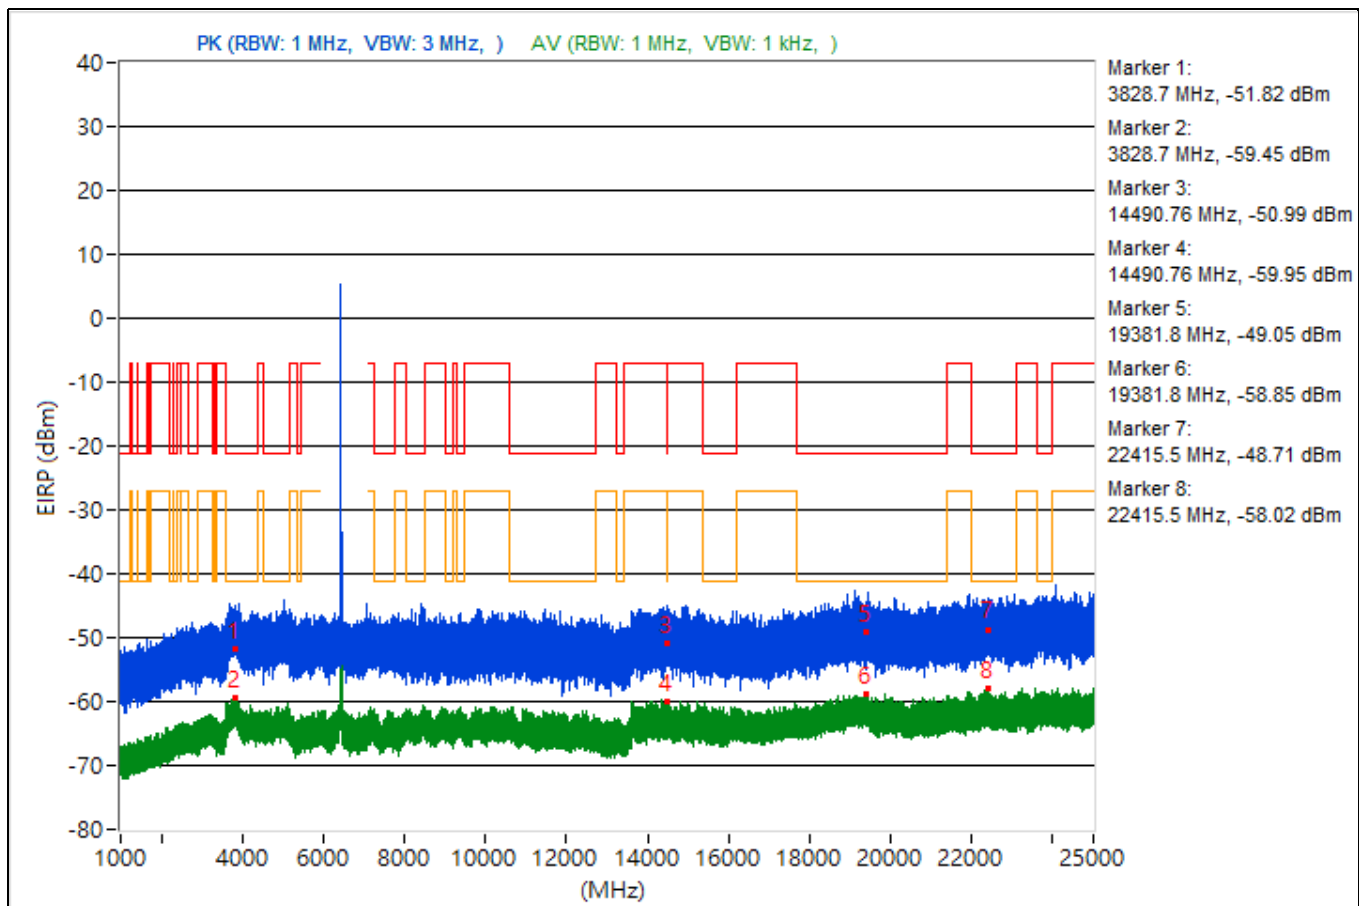


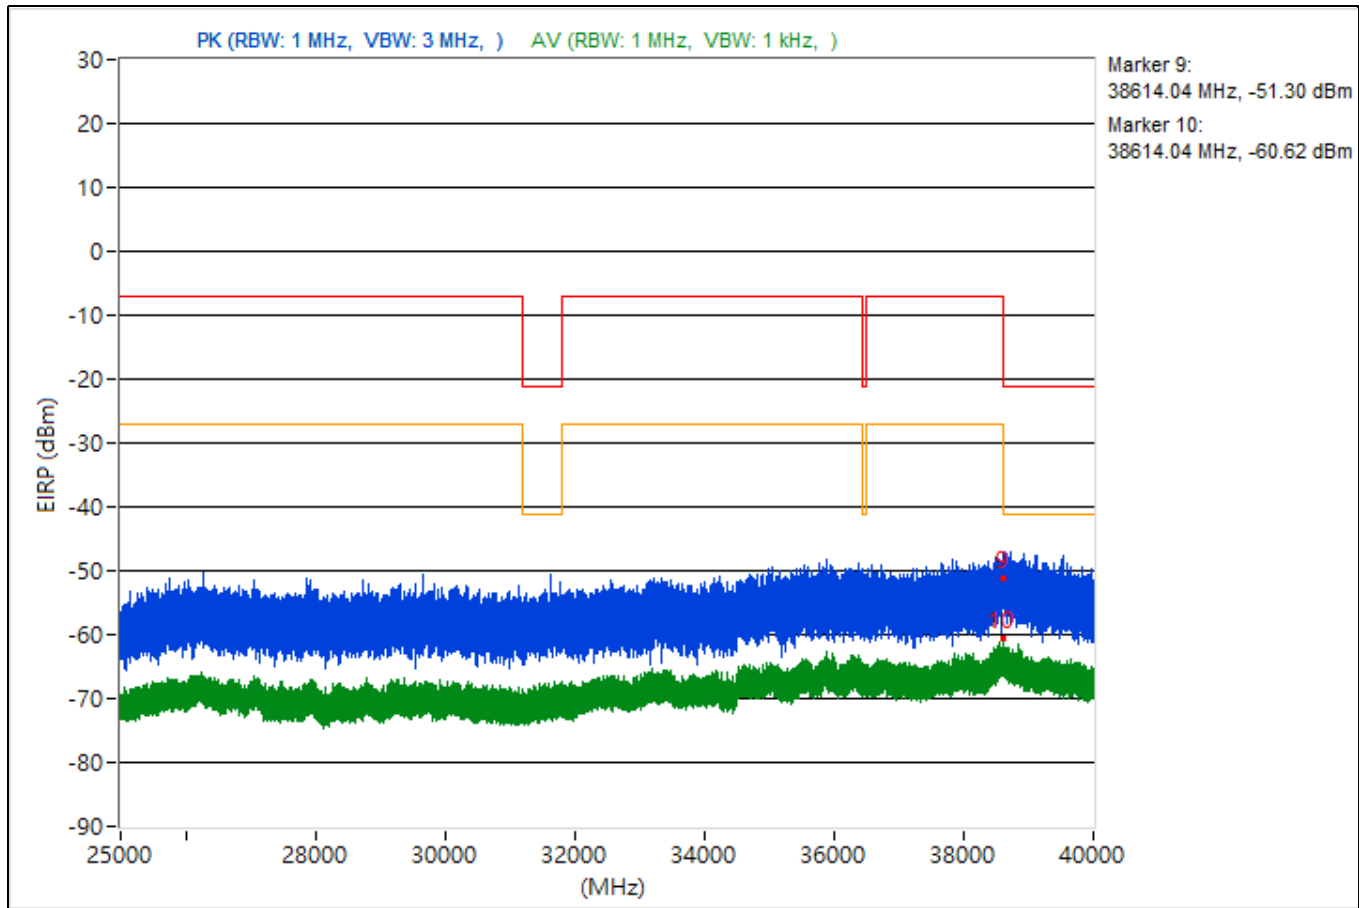


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3869.53	46.77 PK	74	-27.23	-53.41	4.92	-48.49
2	3869.53	36.38 AV	54	-17.62	-63.8	4.92	-58.88
3	14494.76	44.65 PK	74	-29.35	-55.53	4.92	-50.61
4	14494.76	34.7 AV	54	-19.3	-65.48	4.92	-60.56
5	19392.1	43.67 PK	74	-30.33	-56.51	4.92	-51.59
6	19392.1	37.03 AV	54	-16.97	-63.15	4.92	-58.23
7	22442.9	48.83 PK	74	-25.17	-51.35	4.92	-46.43
8	22442.9	37.87 AV	54	-16.13	-62.31	4.92	-57.39
9	38600.98	44.99 PK	74	-29.01	-55.19	4.92	-50.27
10	38600.98	34.29 AV	54	-19.71	-65.89	4.92	-60.97

Note: Margin value = Emission Level - Limit value

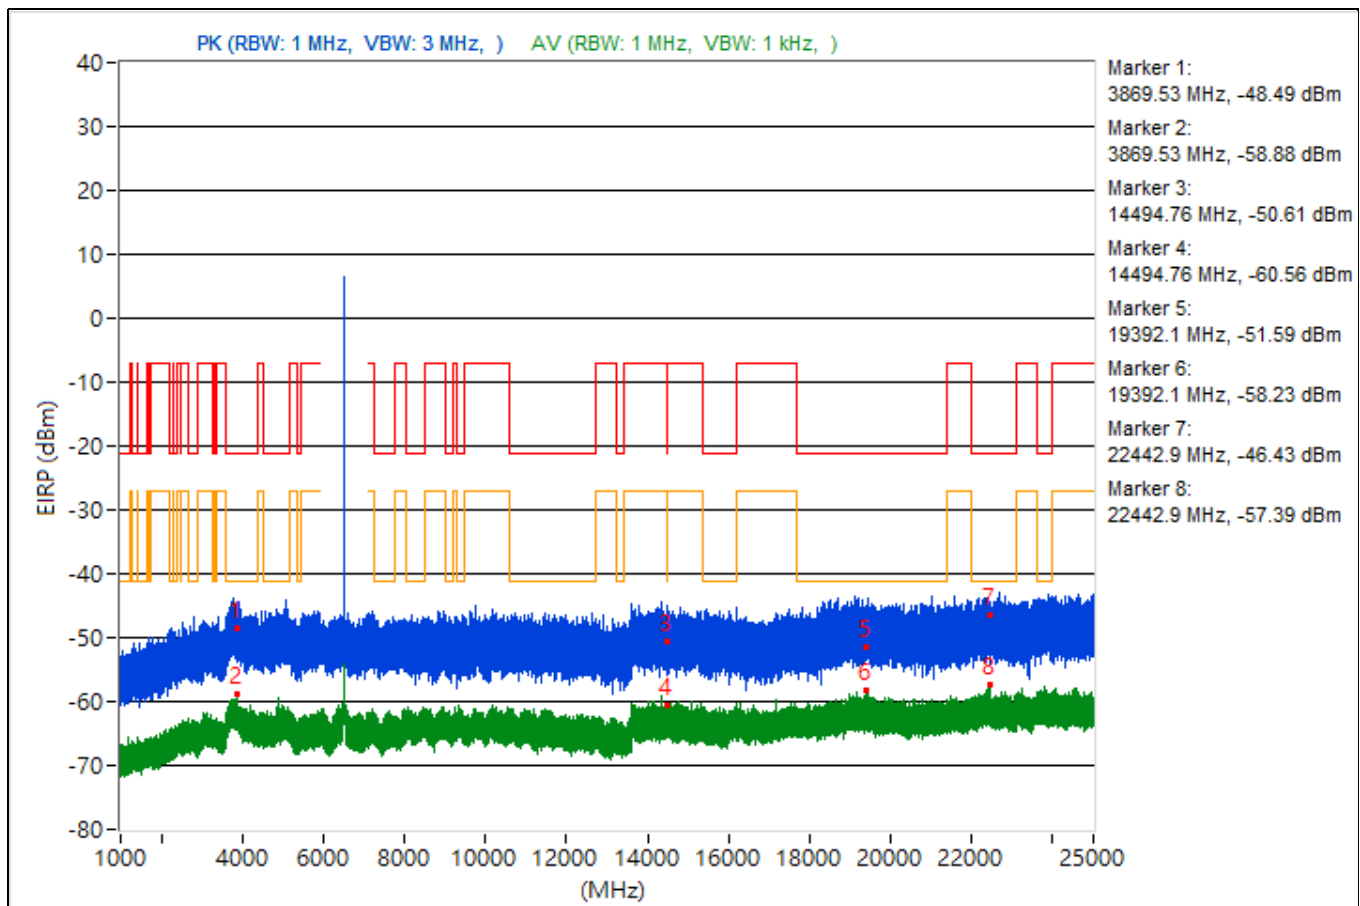


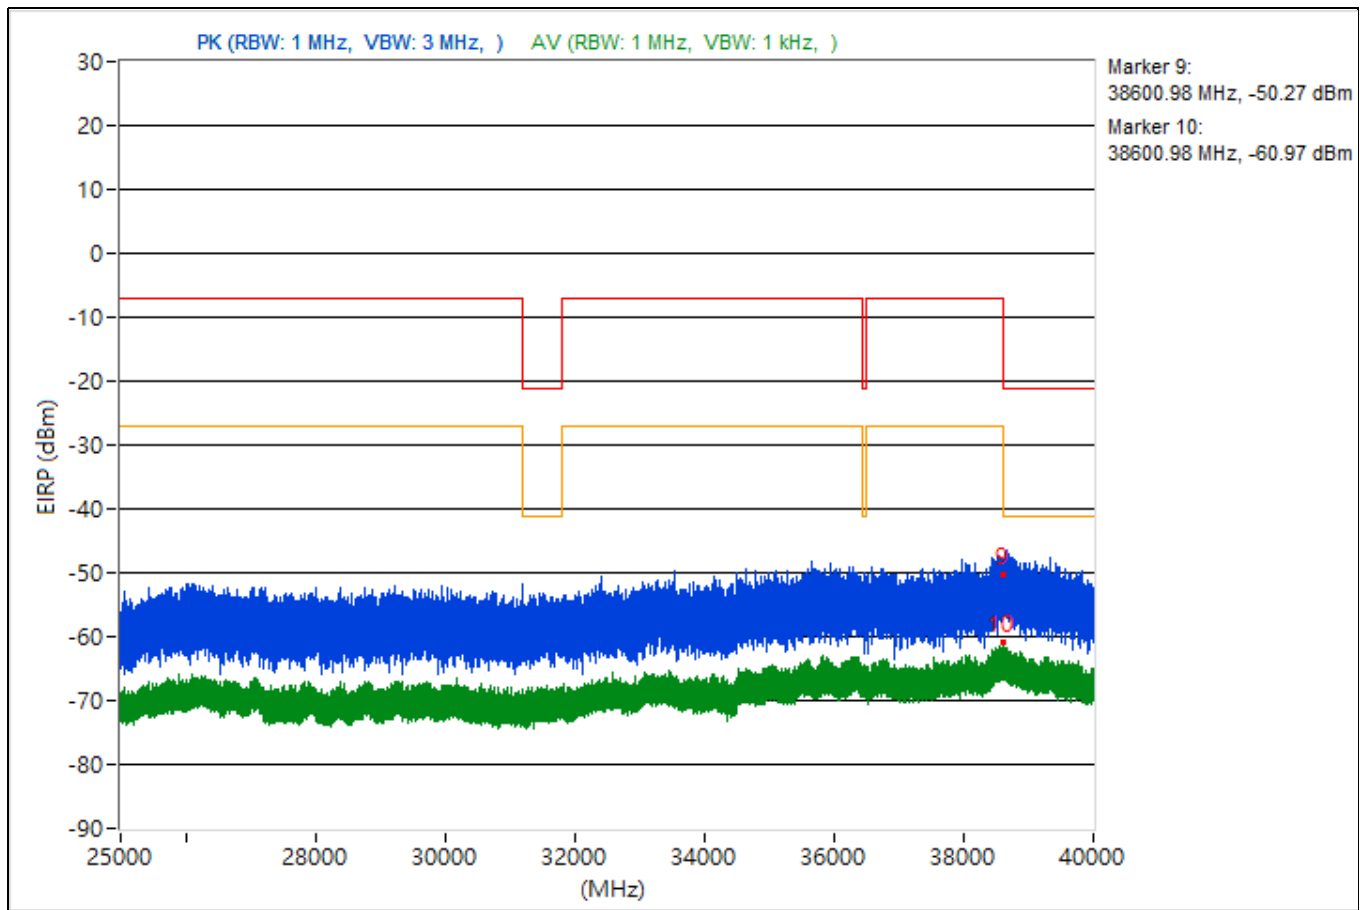


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3815.48	48.2 PK	74	-25.8	-51.98	4.92	-47.06
2	3815.48	36.13 AV	54	-17.87	-64.05	4.92	-59.13
3	8463.73	45.16 PK	74	-28.84	-55.02	4.92	-50.1
4	8463.73	34.88 AV	54	-19.12	-65.3	4.92	-60.38
5	19010.7	44.65 PK	74	-29.35	-55.53	4.92	-50.61
6	19010.7	36.5 AV	54	-17.5	-63.68	4.92	-58.76
7	23843.3	45.63 PK	74	-28.37	-54.55	4.92	-49.63
8	23843.3	38.1 AV	54	-15.9	-62.08	4.92	-57.16
9	38614.31	47.42 PK	74	-26.58	-52.76	4.92	-47.84
10	38614.31	34.07 AV	54	-19.93	-66.11	4.92	-61.19

Note: Margin value = Emission Level - Limit value

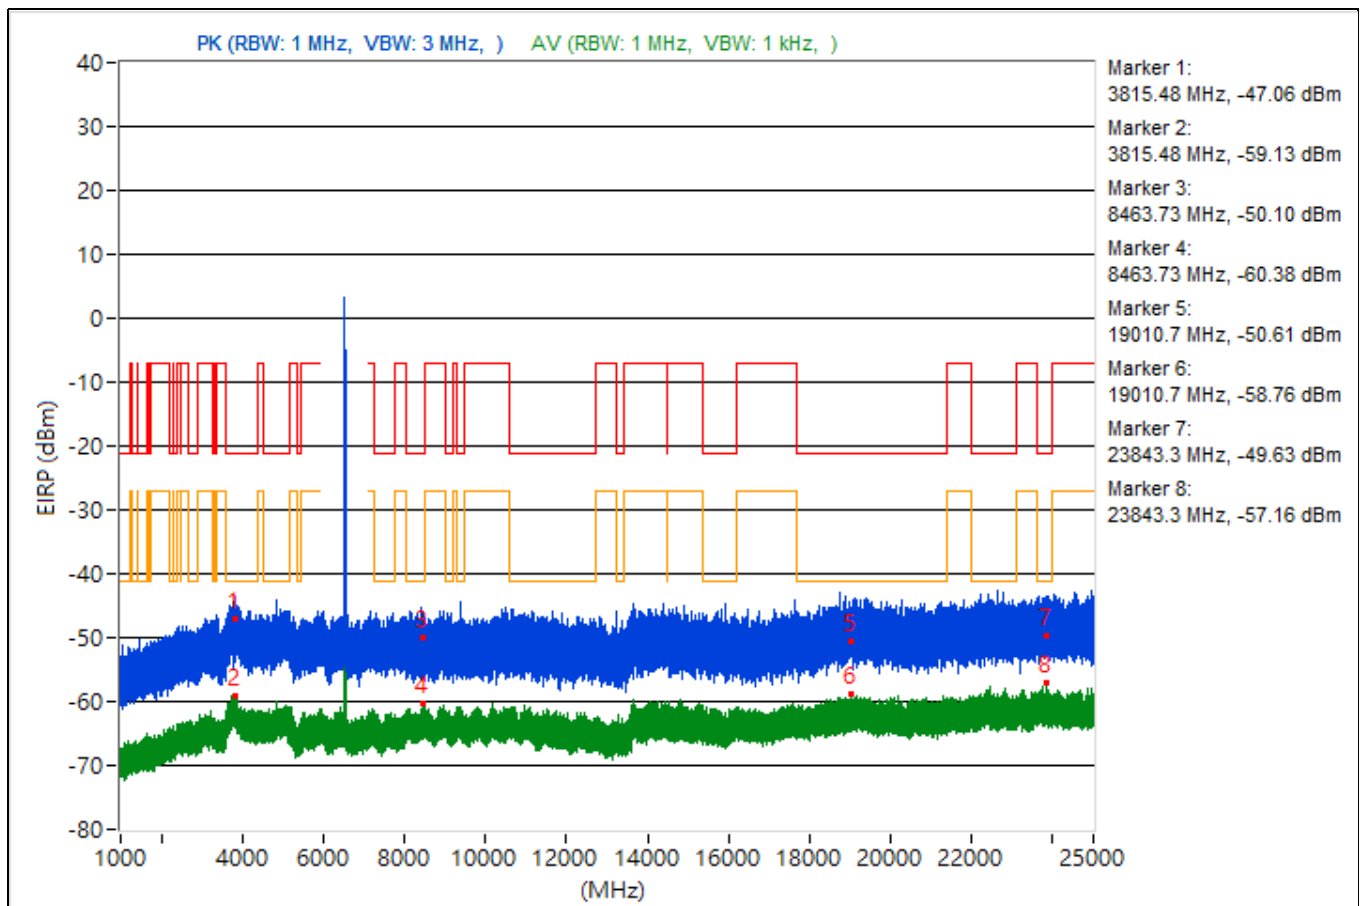


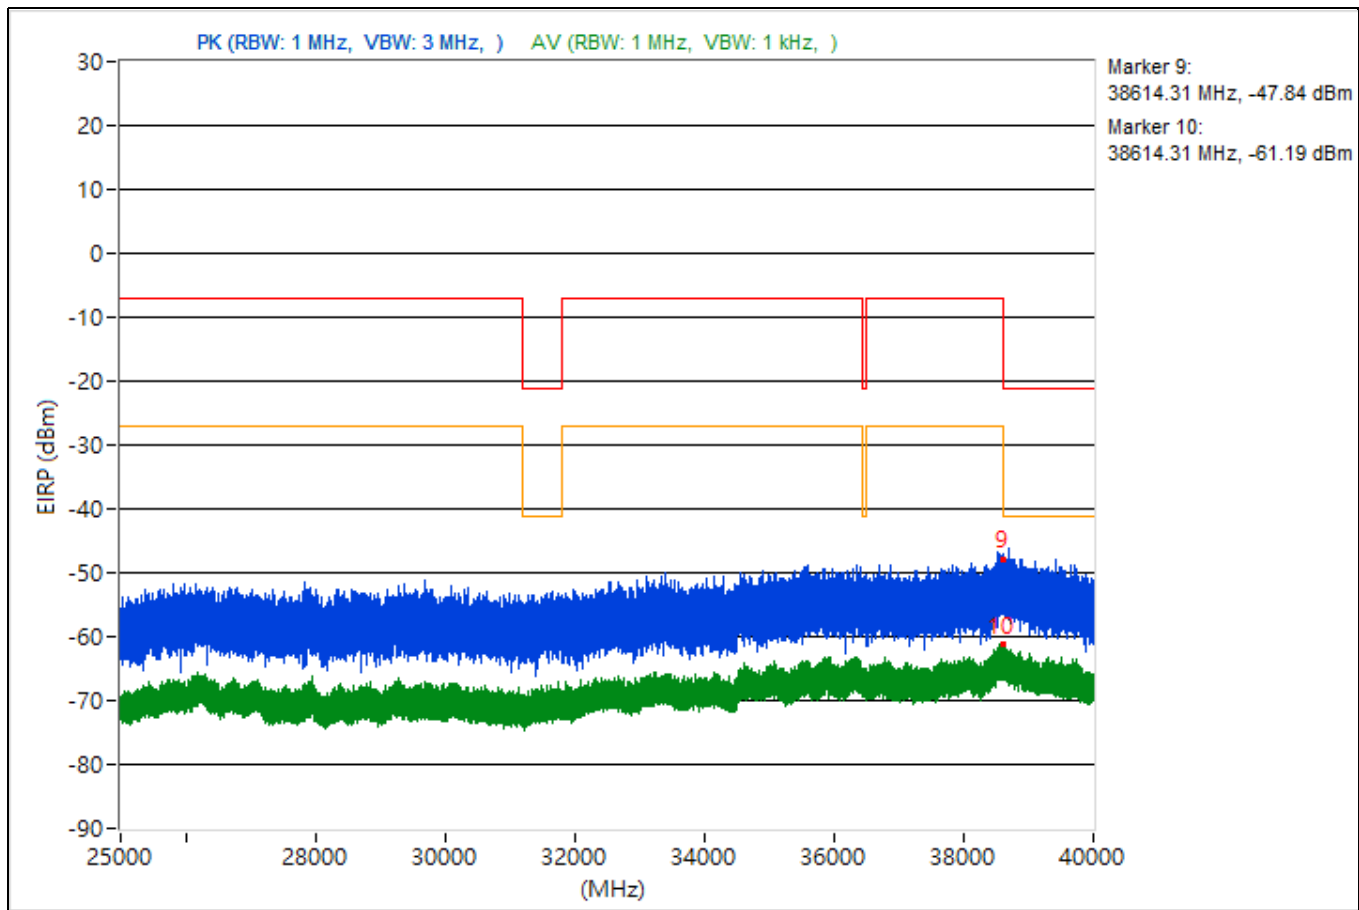


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3782.19	46.73 PK	74	-27.27	-53.45	4.92	-48.53
2	3782.19	35.92 AV	54	-18.08	-64.26	4.92	-59.34
3	14473.6	44.36 PK	74	-29.64	-55.82	4.92	-50.9
4	14473.6	35.39 AV	54	-18.61	-64.79	4.92	-59.87
5	18980.3	41.4 PK	74	-32.6	-58.78	4.92	-53.86
6	18980.3	36.35 AV	54	-17.65	-63.83	4.92	-58.91
7	23608.8	48.27 PK	74	-25.73	-51.91	4.92	-46.99
8	23608.8	37.53 AV	54	-16.47	-62.65	4.92	-57.73
9	38607.02	41.81 PK	74	-32.19	-58.37	4.92	-53.45
10	38607.02	33.6 AV	54	-20.4	-66.58	4.92	-61.66

Note: Margin value = Emission Level - Limit value

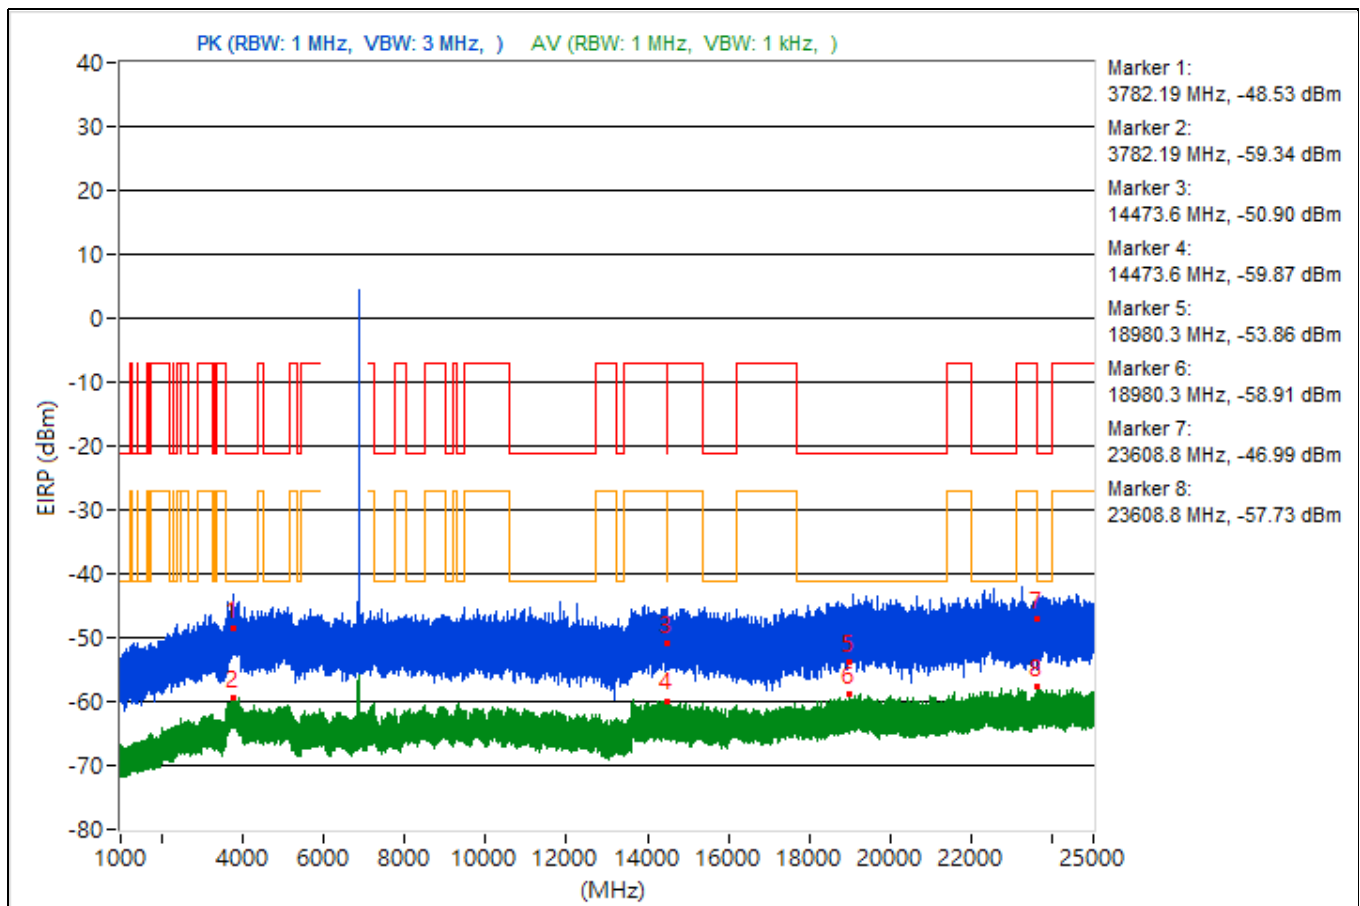


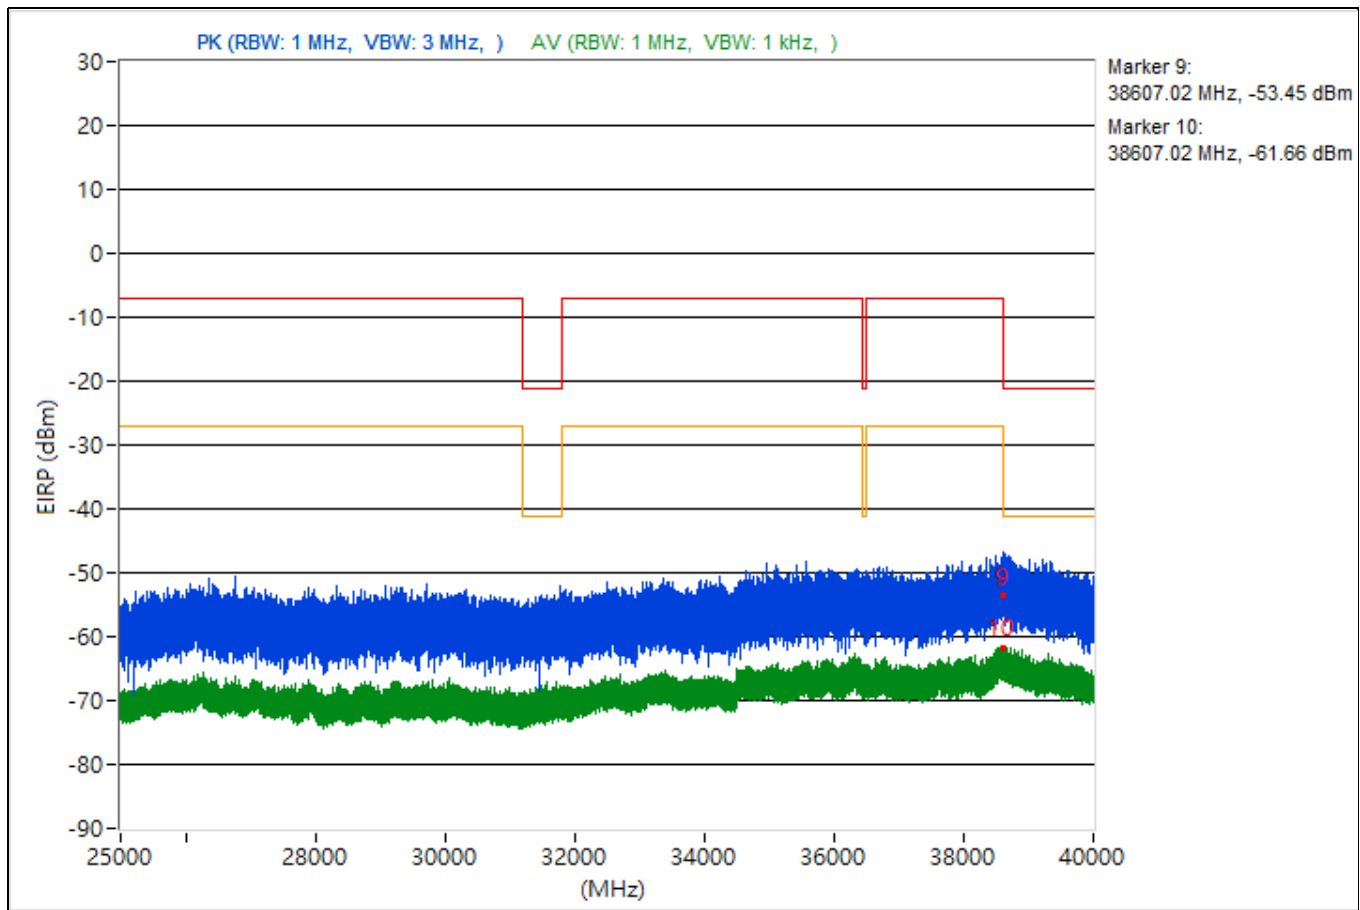


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3735.68	44.64 PK	74	-29.36	-55.54	4.92	-50.62
2	3735.68	36.5 AV	54	-17.5	-63.68	4.92	-58.76
3	14475.2	42.58 PK	74	-31.42	-57.6	4.92	-52.68
4	14475.2	34.75 AV	54	-19.25	-65.43	4.92	-60.51
5	19163.9	46.01 PK	74	-27.99	-54.17	4.92	-49.25
6	19163.9	36.64 AV	54	-17.36	-63.54	4.92	-58.62
7	22421.5	44.09 PK	74	-29.91	-56.09	4.92	-51.17
8	22421.5	37.2 AV	54	-16.8	-62.98	4.92	-58.06
9	38690.67	43.89 PK	74	-30.11	-56.29	4.92	-51.37
10	38690.67	33.69 AV	54	-20.31	-66.49	4.92	-61.57

Note: Margin value = Emission Level - Limit value

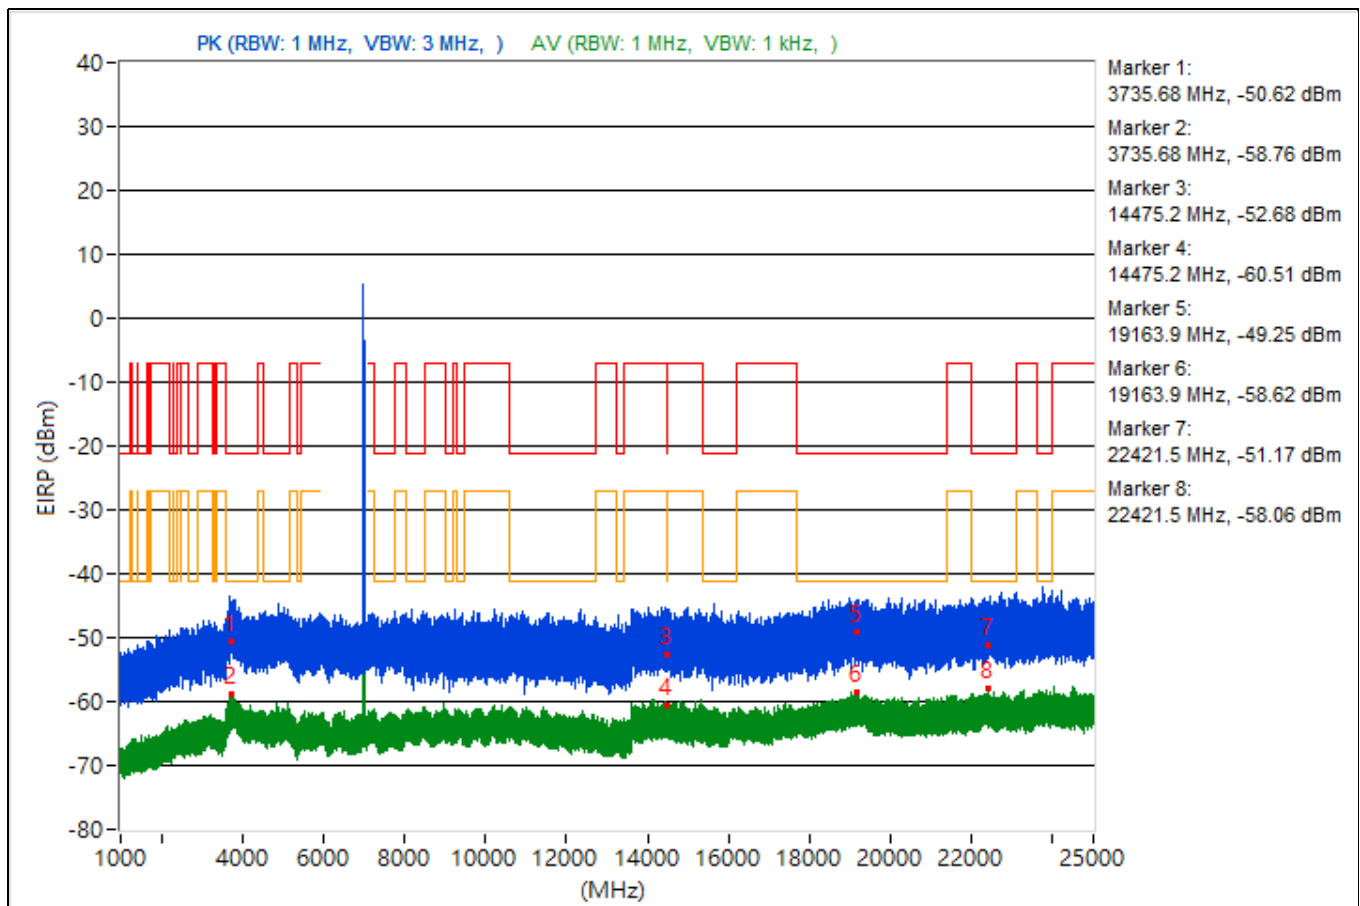


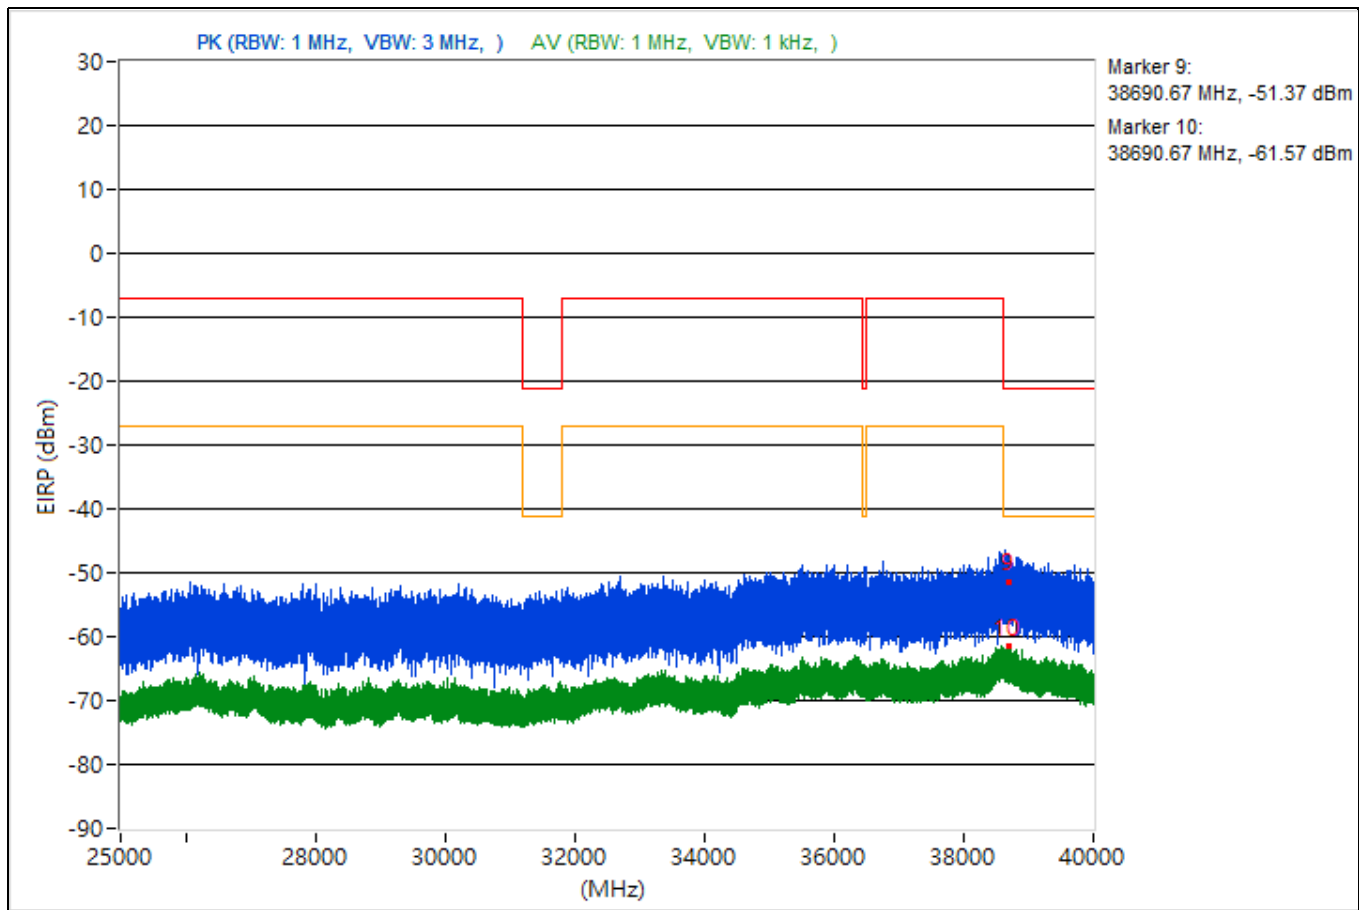


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3785.38	47.31 PK	74	-26.69	-52.87	4.92	-47.95
2	3785.38	36.22 AV	54	-17.78	-63.96	4.92	-59.04
3	14494.22	44.73 PK	74	-29.27	-55.45	4.92	-50.53
4	14494.22	34.84 AV	54	-19.16	-65.34	4.92	-60.42
5	19333.2	46.85 PK	74	-27.15	-53.33	4.92	-48.41
6	19333.2	36.89 AV	54	-17.11	-63.29	4.92	-58.37
7	23818.4	47.07 PK	74	-26.93	-53.11	4.92	-48.19
8	23818.4	37.55 AV	54	-16.45	-62.63	4.92	-57.71
9	38626.4	45.1 PK	74	-28.9	-55.08	4.92	-50.16
10	38626.4	34.58 AV	54	-19.42	-65.6	4.92	-60.68

Note: Margin value = Emission Level - Limit value

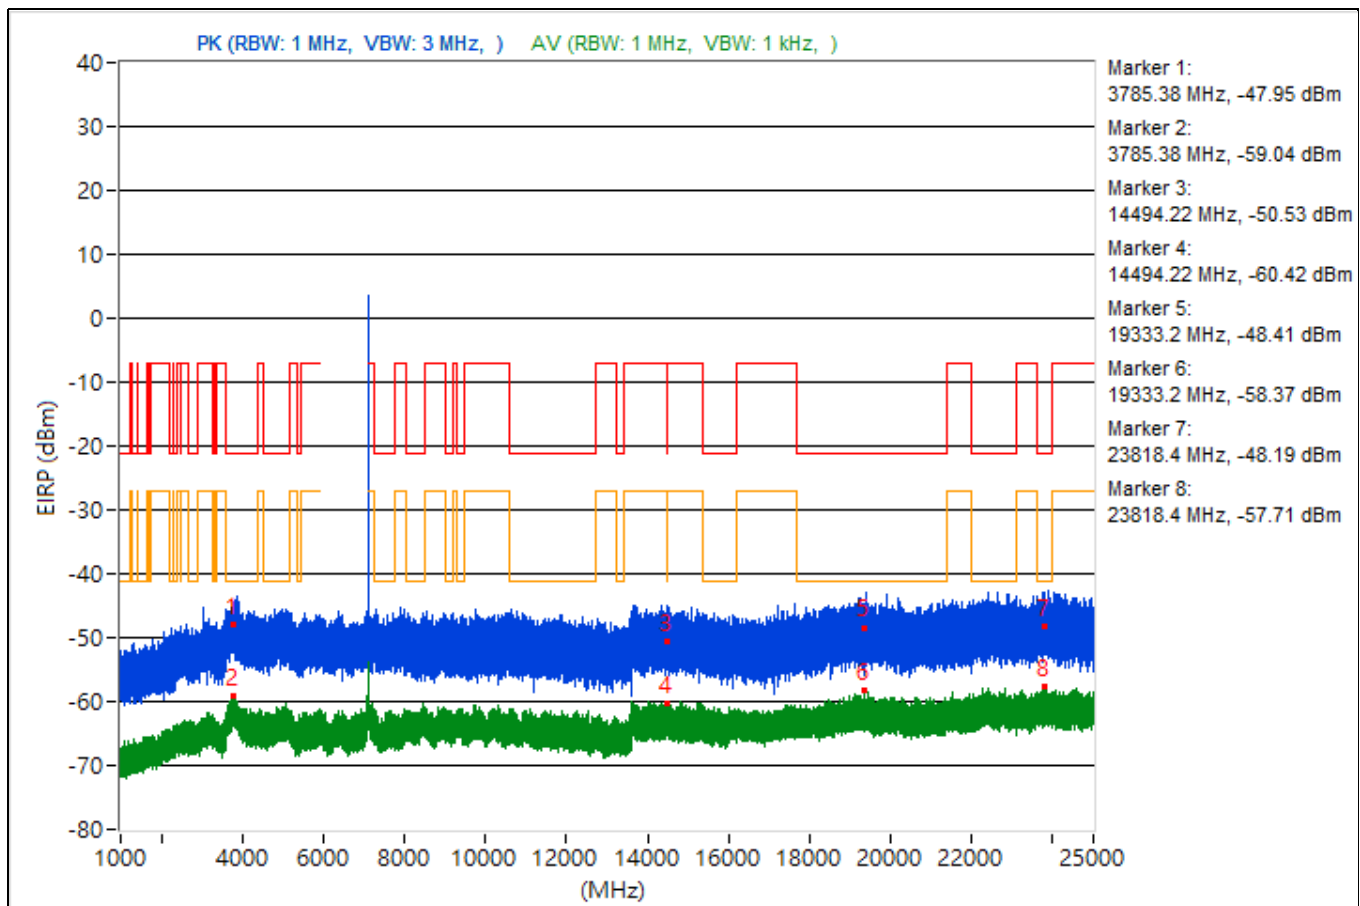


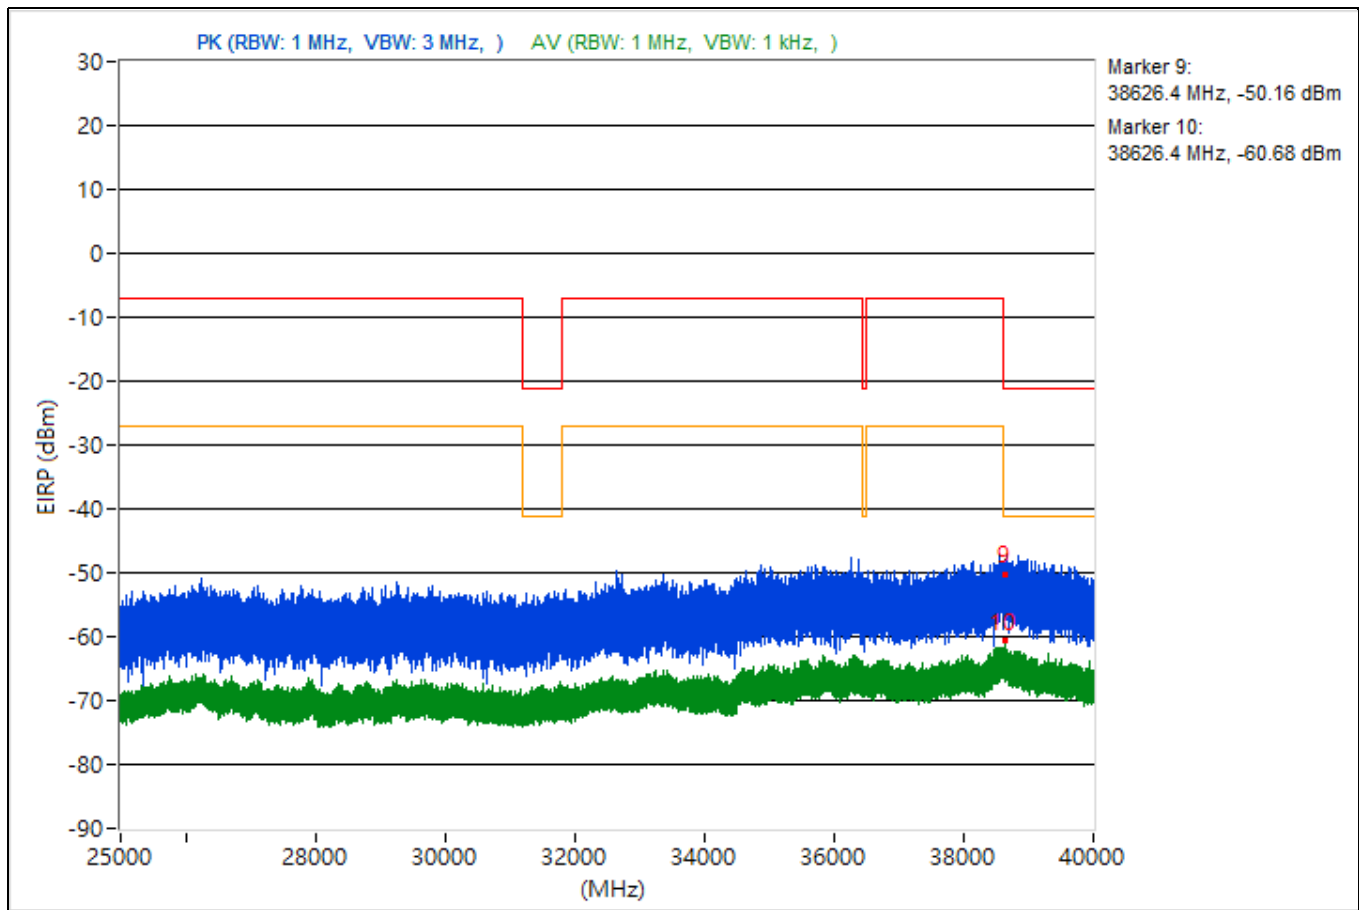


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3811.9	49.75 PK	74	-24.25	-50.43	4.92	-45.51
2	3811.9	36.22 AV	54	-17.78	-63.96	4.92	-59.04
3	14486.4	44.97 PK	74	-29.03	-55.21	4.92	-50.29
4	14486.4	35.01 AV	54	-18.99	-65.17	4.92	-60.25
5	19184.8	44.7 PK	74	-29.3	-55.48	4.92	-50.56
6	19184.8	36.62 AV	54	-17.38	-63.56	4.92	-58.64
7	22416.2	48.71 PK	74	-25.29	-51.47	4.92	-46.55
8	22416.2	37.73 AV	54	-16.27	-62.45	4.92	-57.53
9	38616.44	42.12 PK	74	-31.88	-58.06	4.92	-53.14
10	38616.44	33.83 AV	54	-20.17	-66.35	4.92	-61.43

Note: Margin value = Emission Level - Limit value

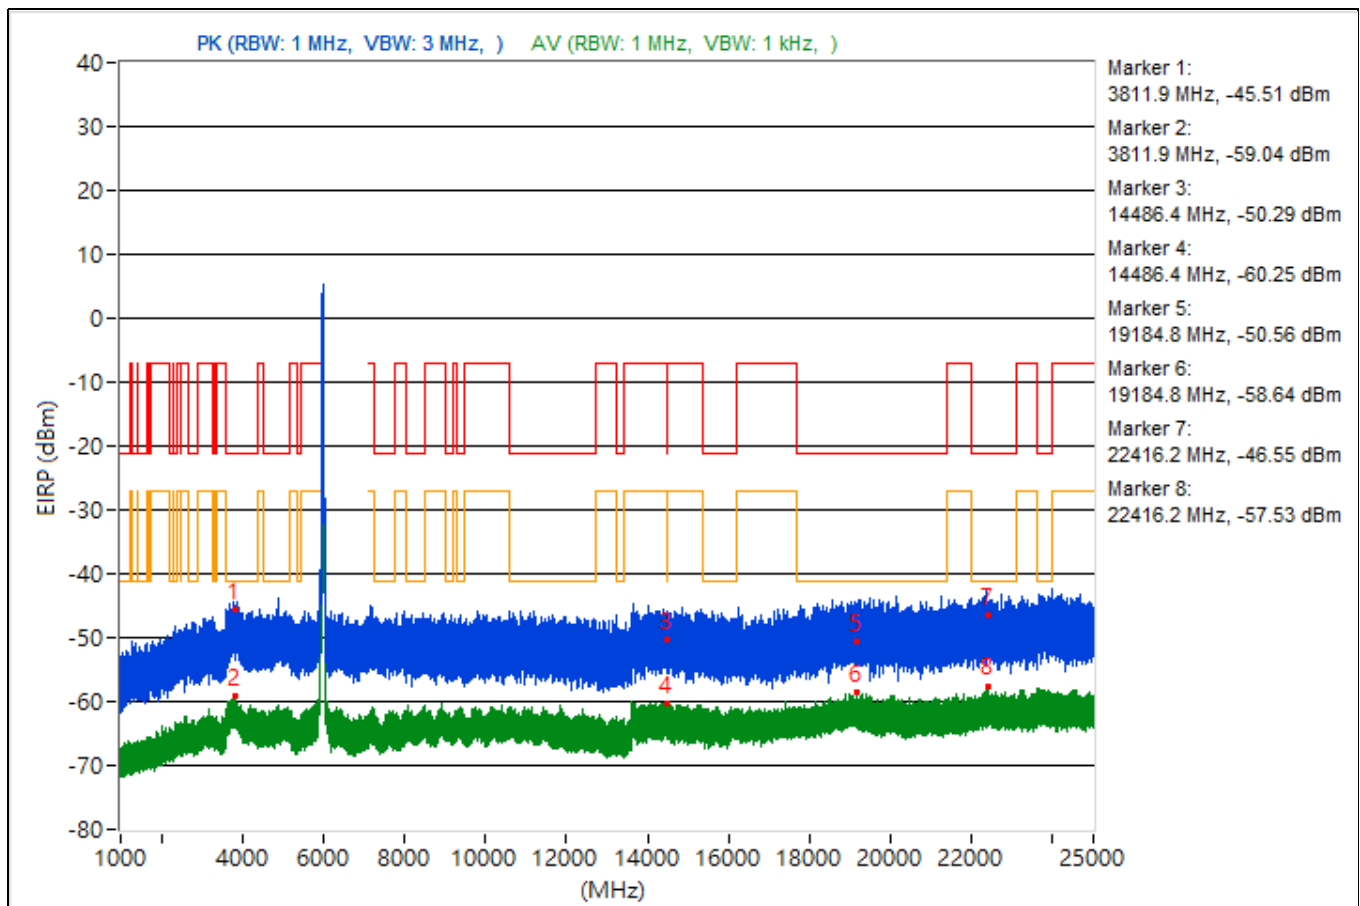


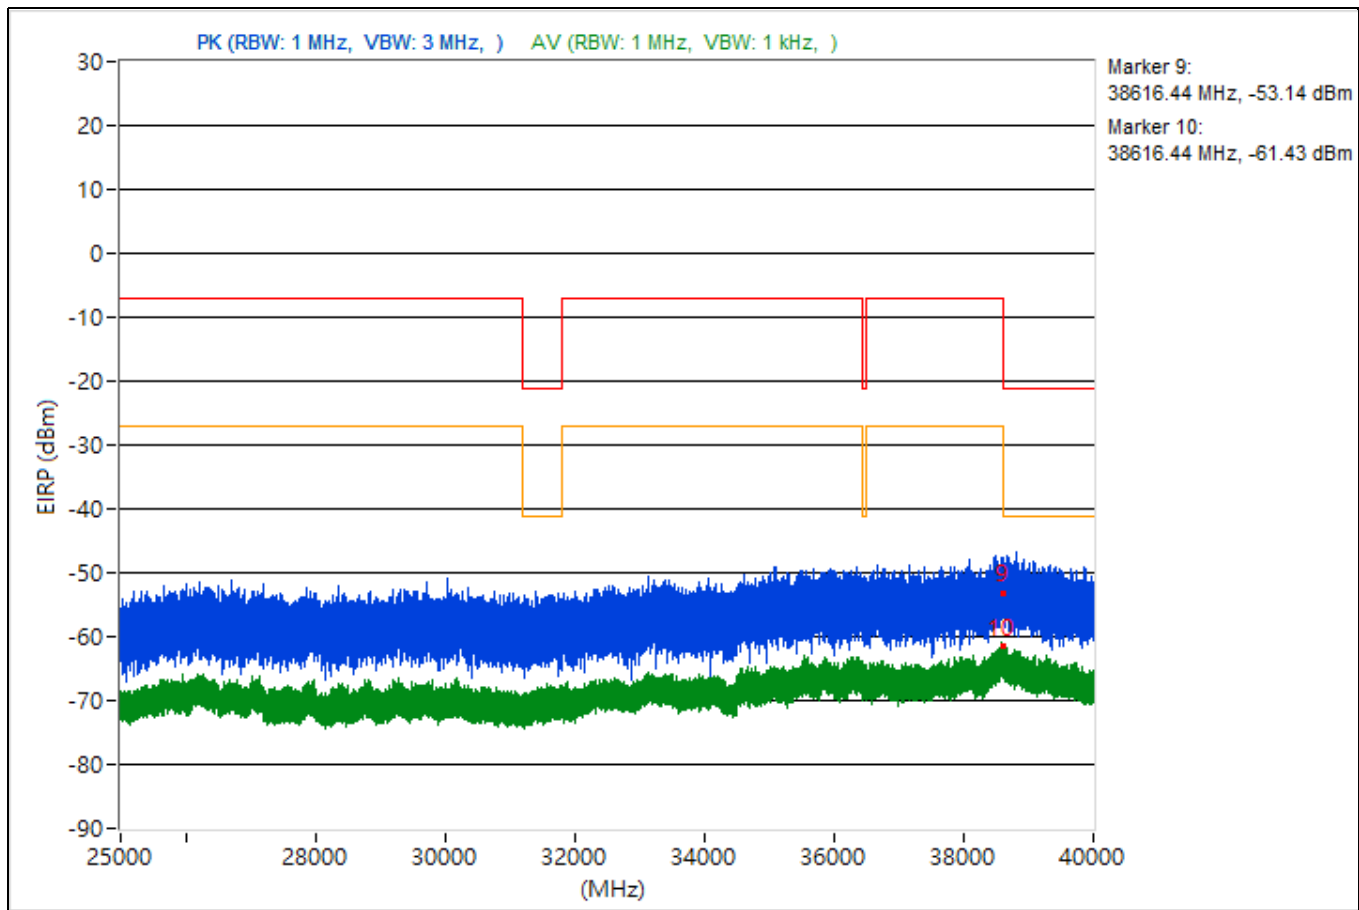


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3814.62	45.54 PK	74	-28.46	-54.64	4.92	-49.72
2	3814.62	36.12 AV	54	-17.88	-64.06	4.92	-59.14
3	9330.67	44.72 PK	74	-29.28	-55.46	4.92	-50.54
4	9330.67	34.85 AV	54	-19.15	-65.33	4.92	-60.41
5	19131.9	46.63 PK	74	-27.37	-53.55	4.92	-48.63
6	19131.9	36.78 AV	54	-17.22	-63.4	4.92	-58.48
7	23638	47.46 PK	74	-26.54	-52.72	4.92	-47.8
8	23638	37.71 AV	54	-16.29	-62.47	4.92	-57.55
9	38618.31	40.77 PK	74	-33.23	-59.41	4.92	-54.49
10	38618.31	34.19 AV	54	-19.81	-65.99	4.92	-61.07

Note: Margin value = Emission Level - Limit value

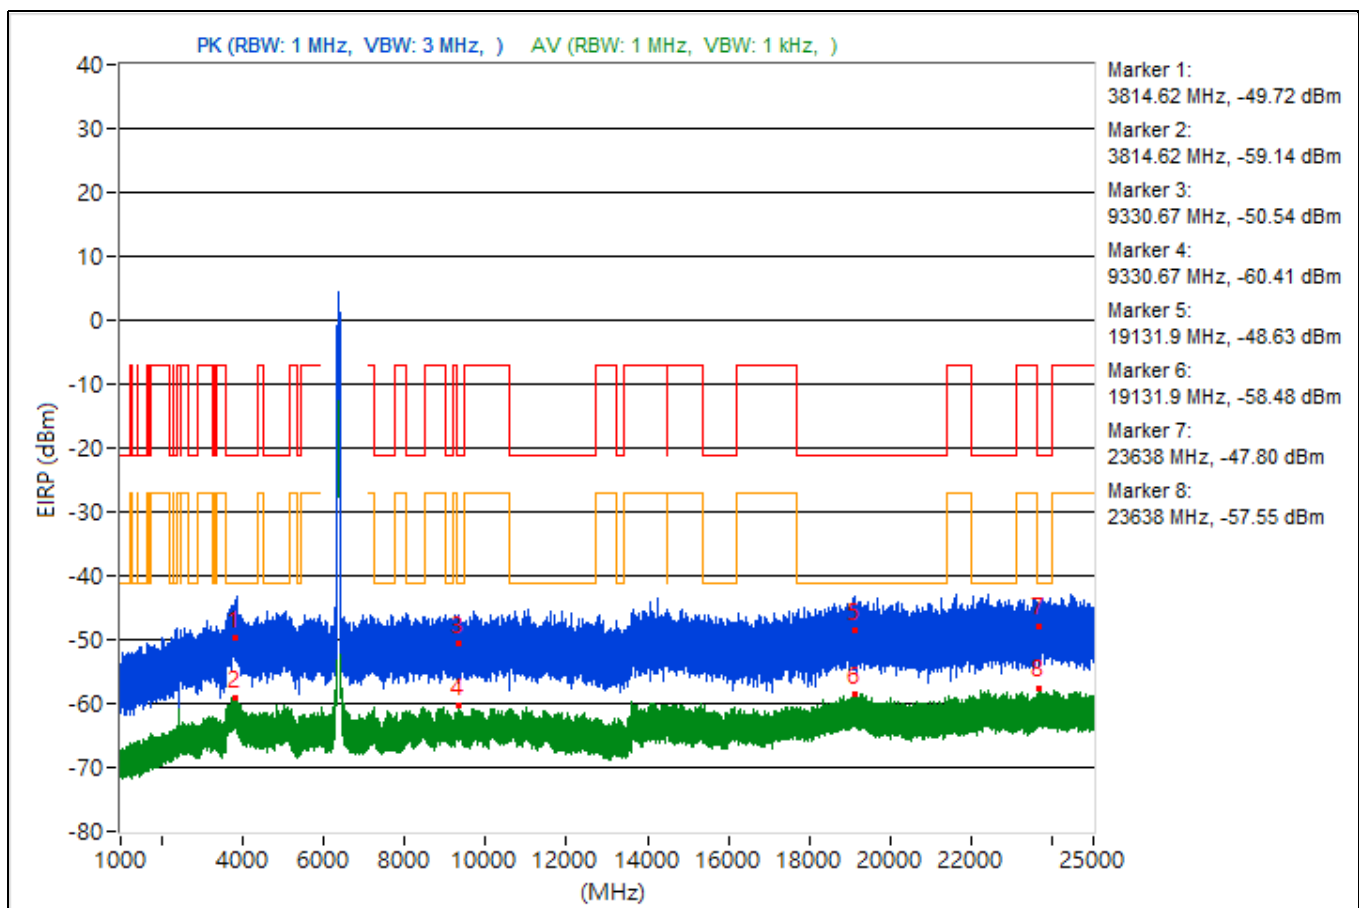


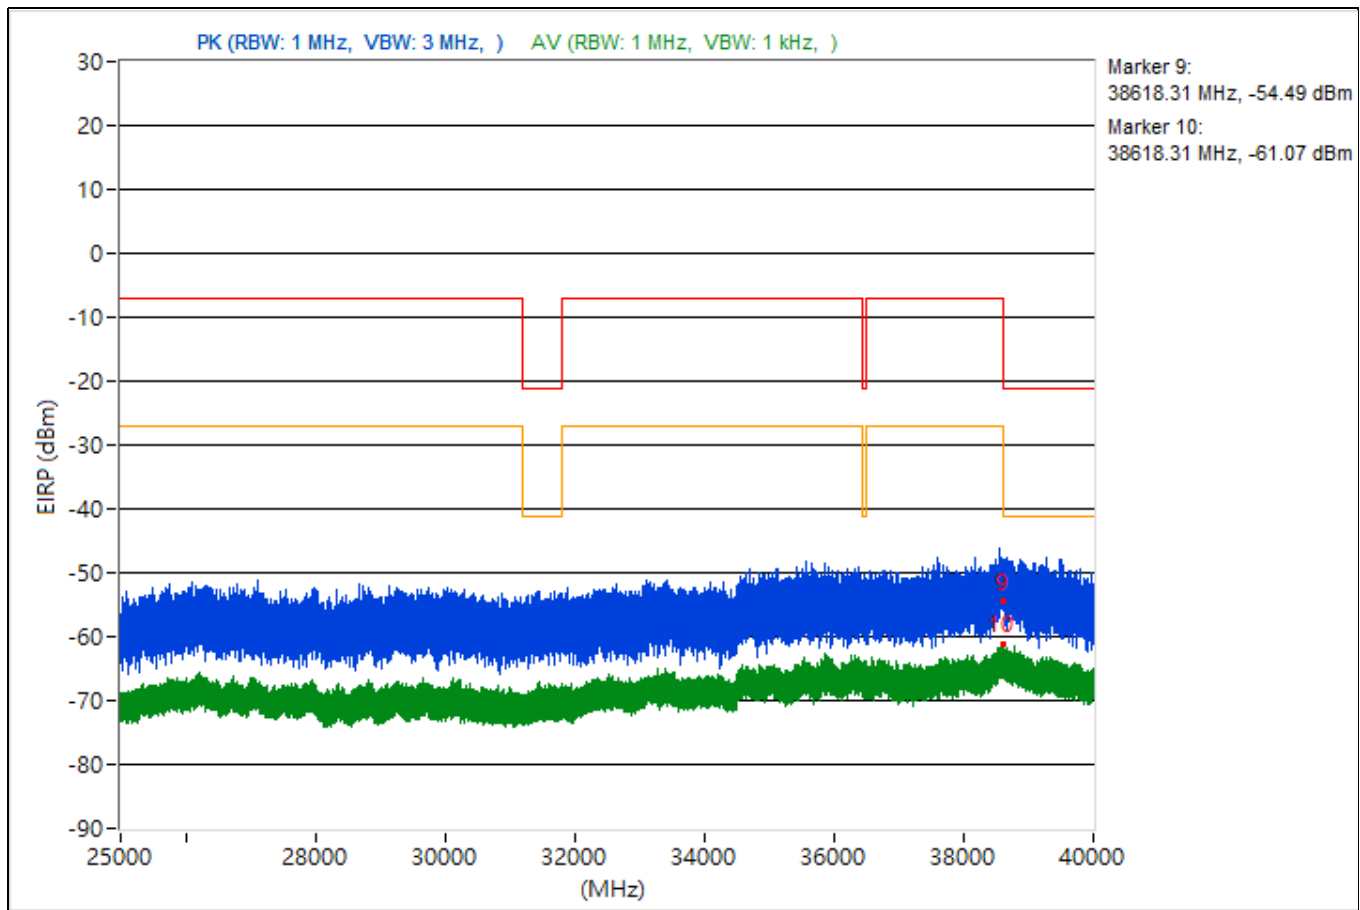


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3834.61	45.42 PK	74	-28.58	-54.76	4.92	-49.84
2	3834.61	36.11 AV	54	-17.89	-64.07	4.92	-59.15
3	14492.62	44.33 PK	74	-29.67	-55.85	4.92	-50.93
4	14492.62	35.18 AV	54	-18.82	-65	4.92	-60.08
5	19401.2	44.45 PK	74	-29.55	-55.73	4.92	-50.81
6	19401.2	36.52 AV	54	-17.48	-63.66	4.92	-58.74
7	22451.7	45.92 PK	74	-28.08	-54.26	4.92	-49.34
8	22451.7	37.48 AV	54	-16.52	-62.7	4.92	-57.78
9	38609.16	40.99 PK	74	-33.01	-59.19	4.92	-54.27
10	38609.16	33.95 AV	54	-20.05	-66.23	4.92	-61.31

Note: Margin value = Emission Level - Limit value

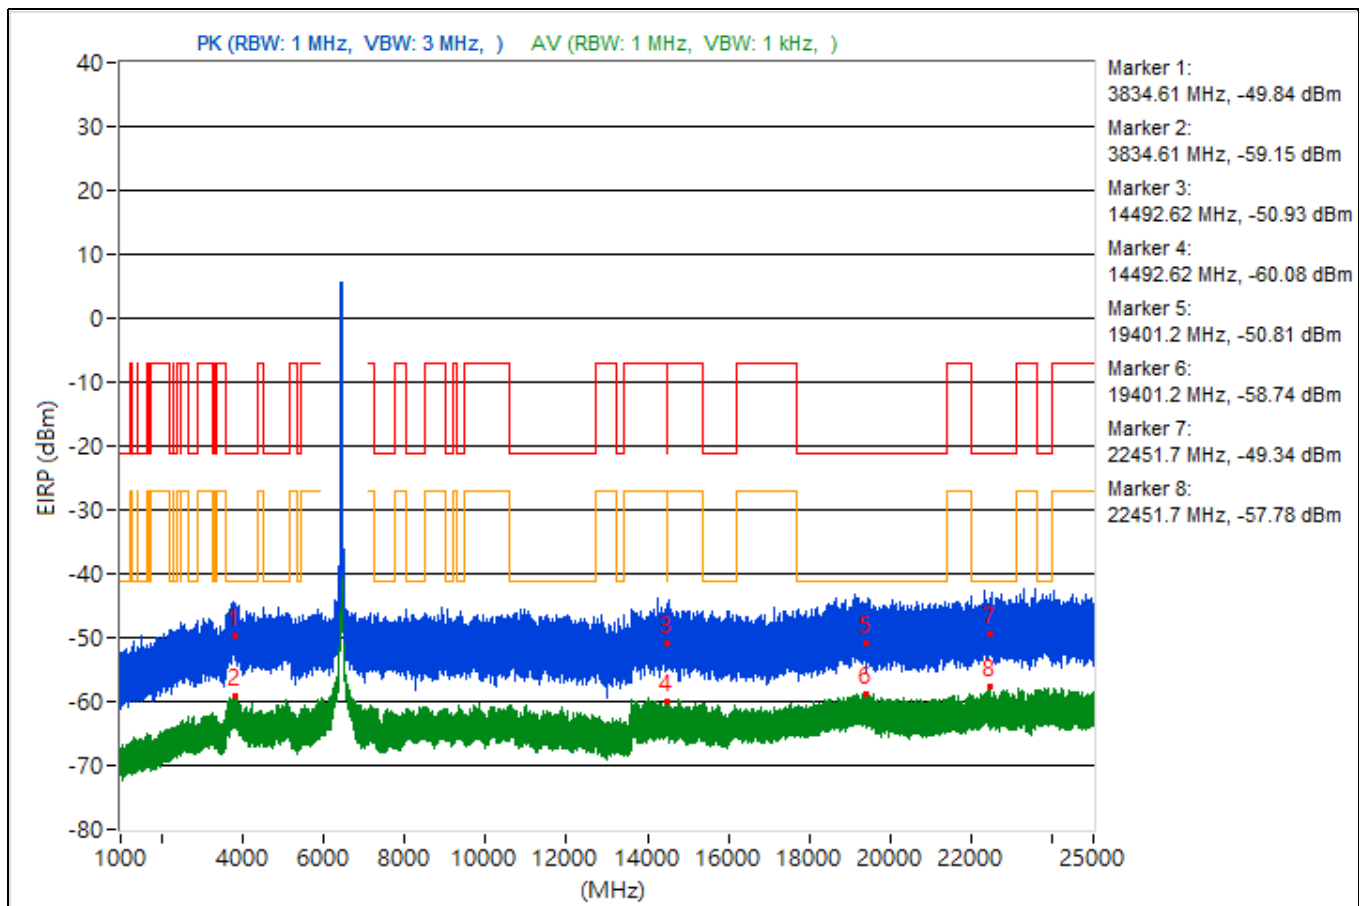


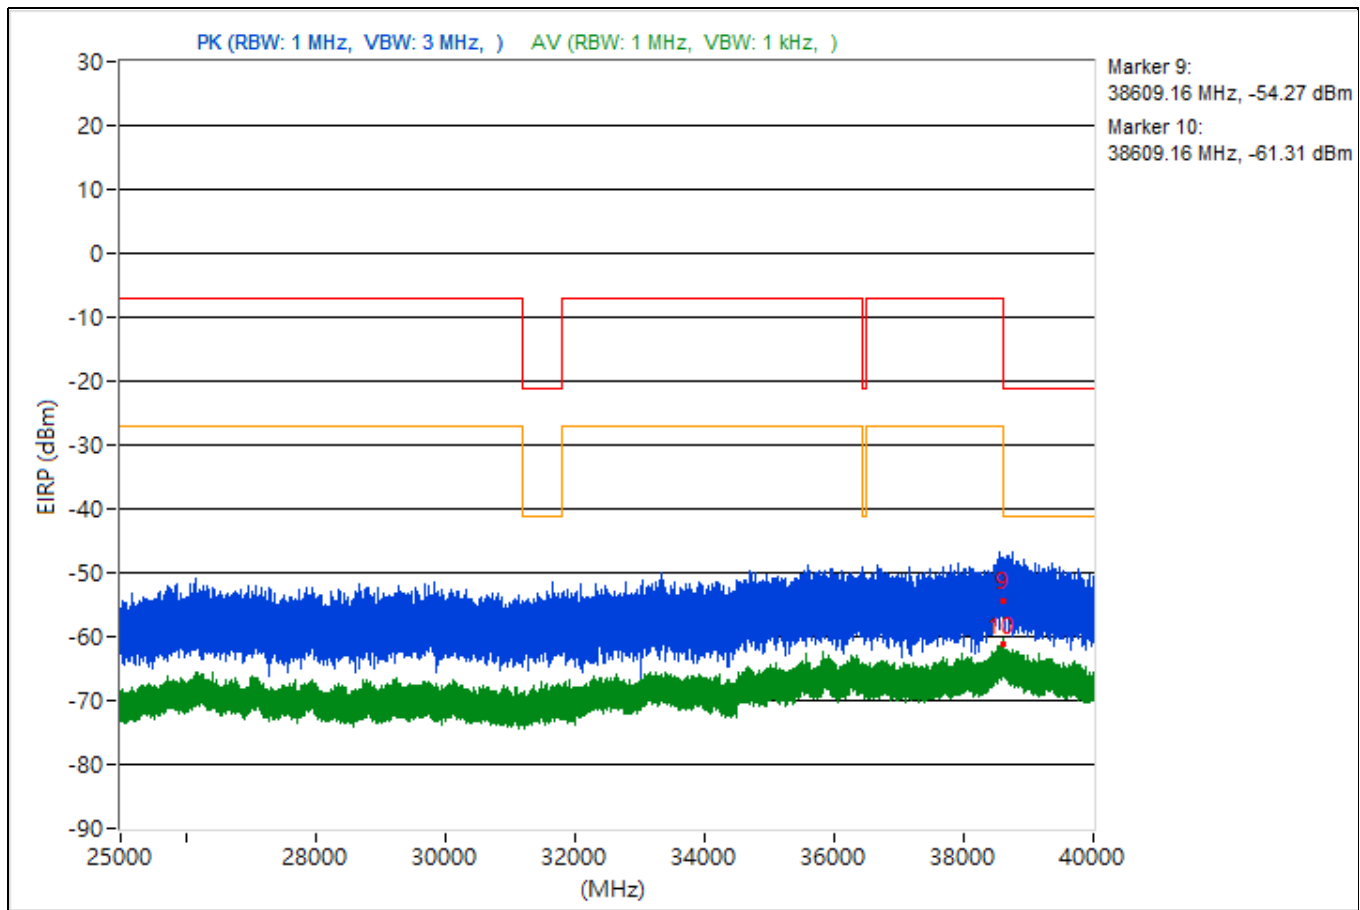


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3796.73	46.79 PK	74	-27.21	-53.39	4.92	-48.47
2	3796.73	35.84 AV	54	-18.16	-64.34	4.92	-59.42
3	9104.18	40.71 PK	74	-33.29	-59.47	4.92	-54.55
4	9104.18	35.08 AV	54	-18.92	-65.1	4.92	-60.18
5	19321.8	48.61 PK	74	-25.39	-51.57	4.92	-46.65
6	19321.8	36.61 AV	54	-17.39	-63.57	4.92	-58.65
7	23951.1	46.2 PK	74	-27.8	-53.98	4.92	-49.06
8	23951.1	37.41 AV	54	-16.59	-62.77	4.92	-57.85
9	38601.33	42.26 PK	74	-31.74	-57.92	4.92	-53
10	38601.33	33.9 AV	54	-20.1	-66.28	4.92	-61.36

Note: Margin value = Emission Level - Limit value

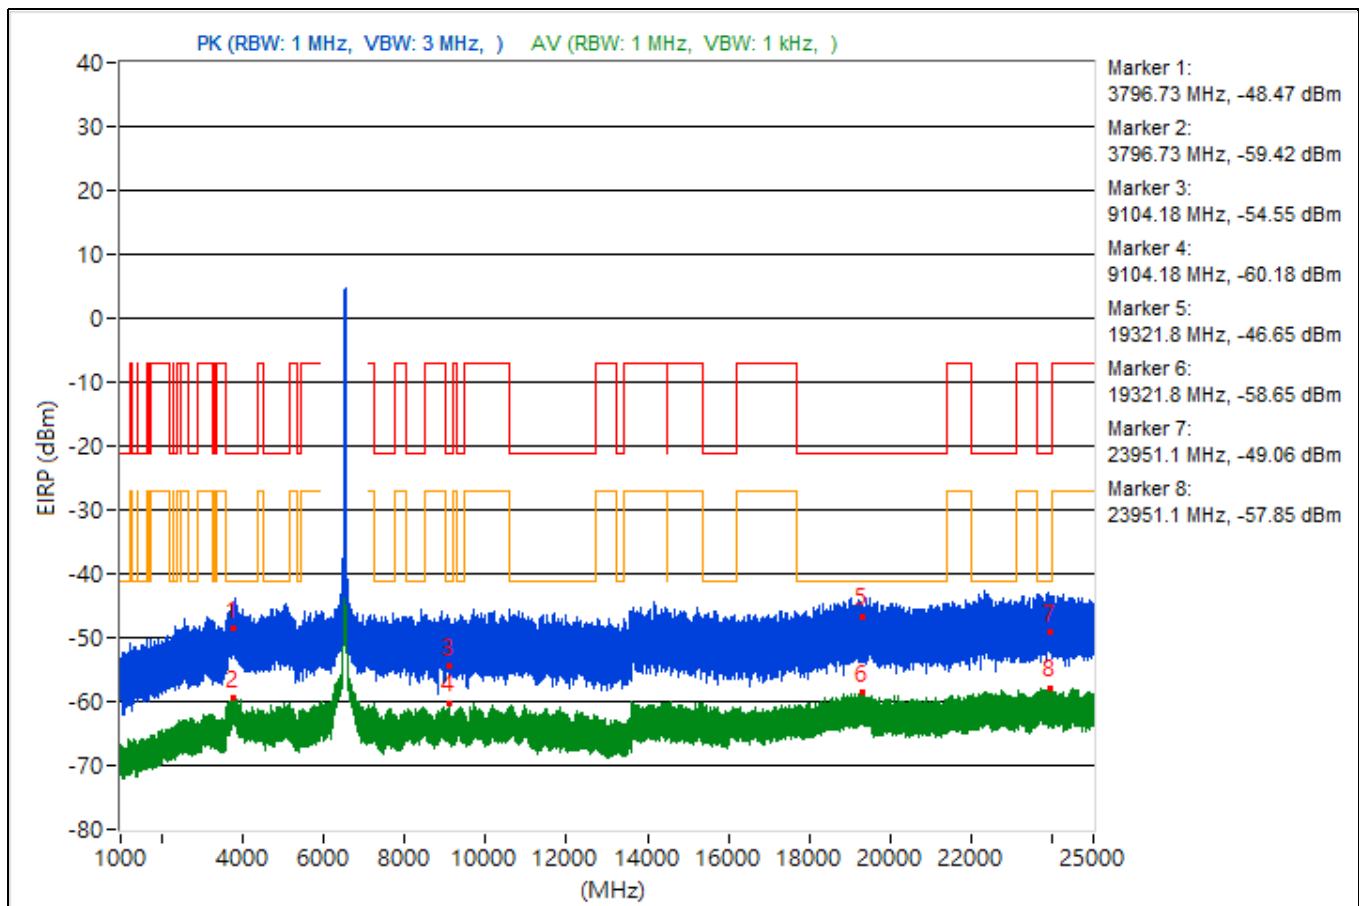


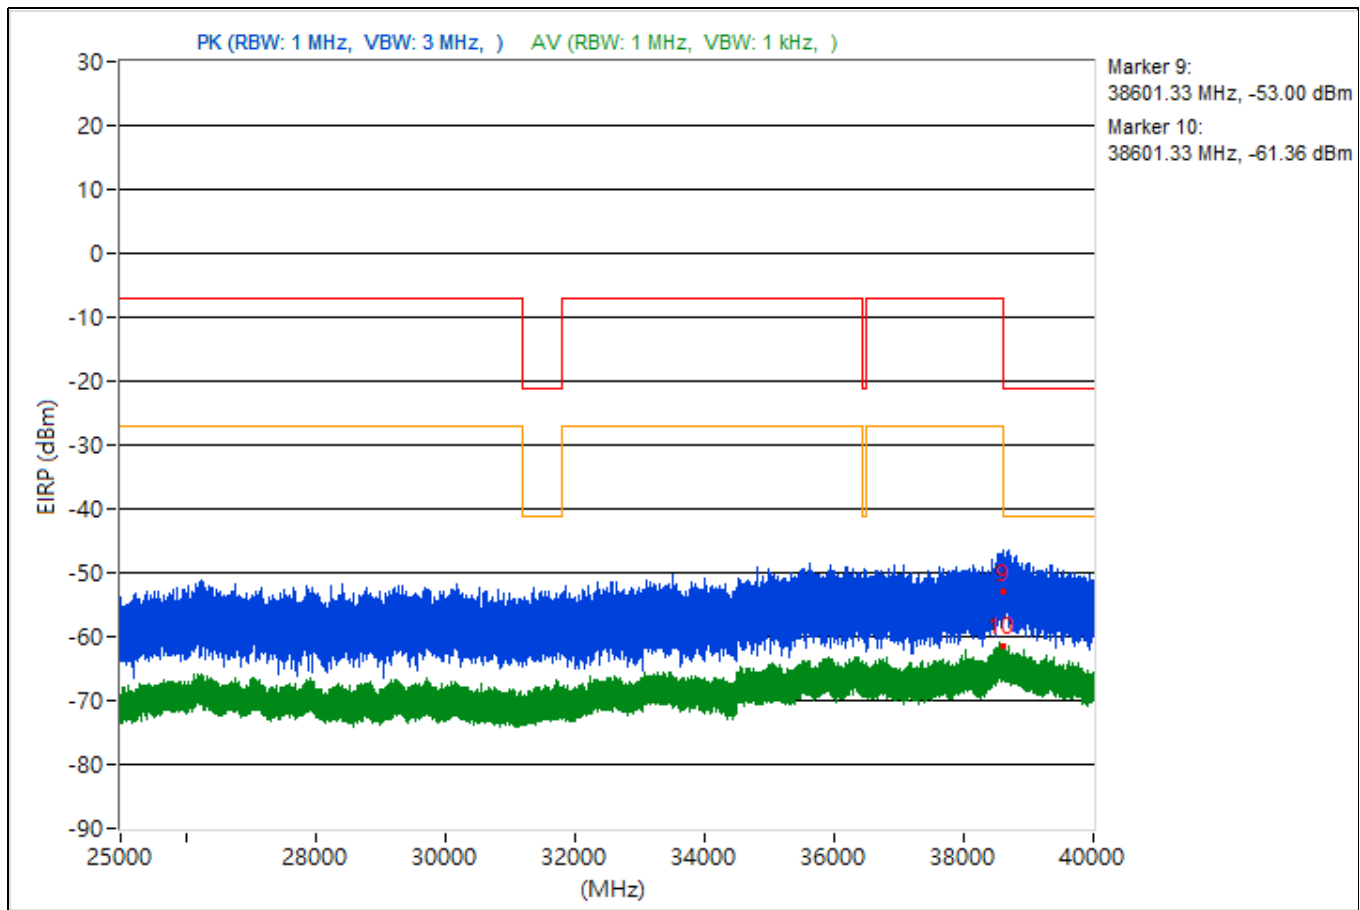


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3791.91	46.42 PK	74	-27.58	-53.76	4.92	-48.84
2	3791.91	35.88 AV	54	-18.12	-64.3	4.92	-59.38
3	14477.78	47.73 PK	74	-26.27	-52.45	4.92	-47.53
4	14477.78	34.98 AV	54	-19.02	-65.2	4.92	-60.28
5	19103.5	47.71 PK	74	-26.29	-52.47	4.92	-47.55
6	19103.5	36.5 AV	54	-17.5	-63.68	4.92	-58.76
7	22357.4	45.87 PK	74	-28.13	-54.31	4.92	-49.39
8	22357.4	37.94 AV	54	-16.06	-62.24	4.92	-57.32
9	38658.76	39.52 PK	74	-34.48	-60.66	4.92	-55.74
10	38658.76	34.06 AV	54	-19.94	-66.12	4.92	-61.2

Note: Margin value = Emission Level - Limit value

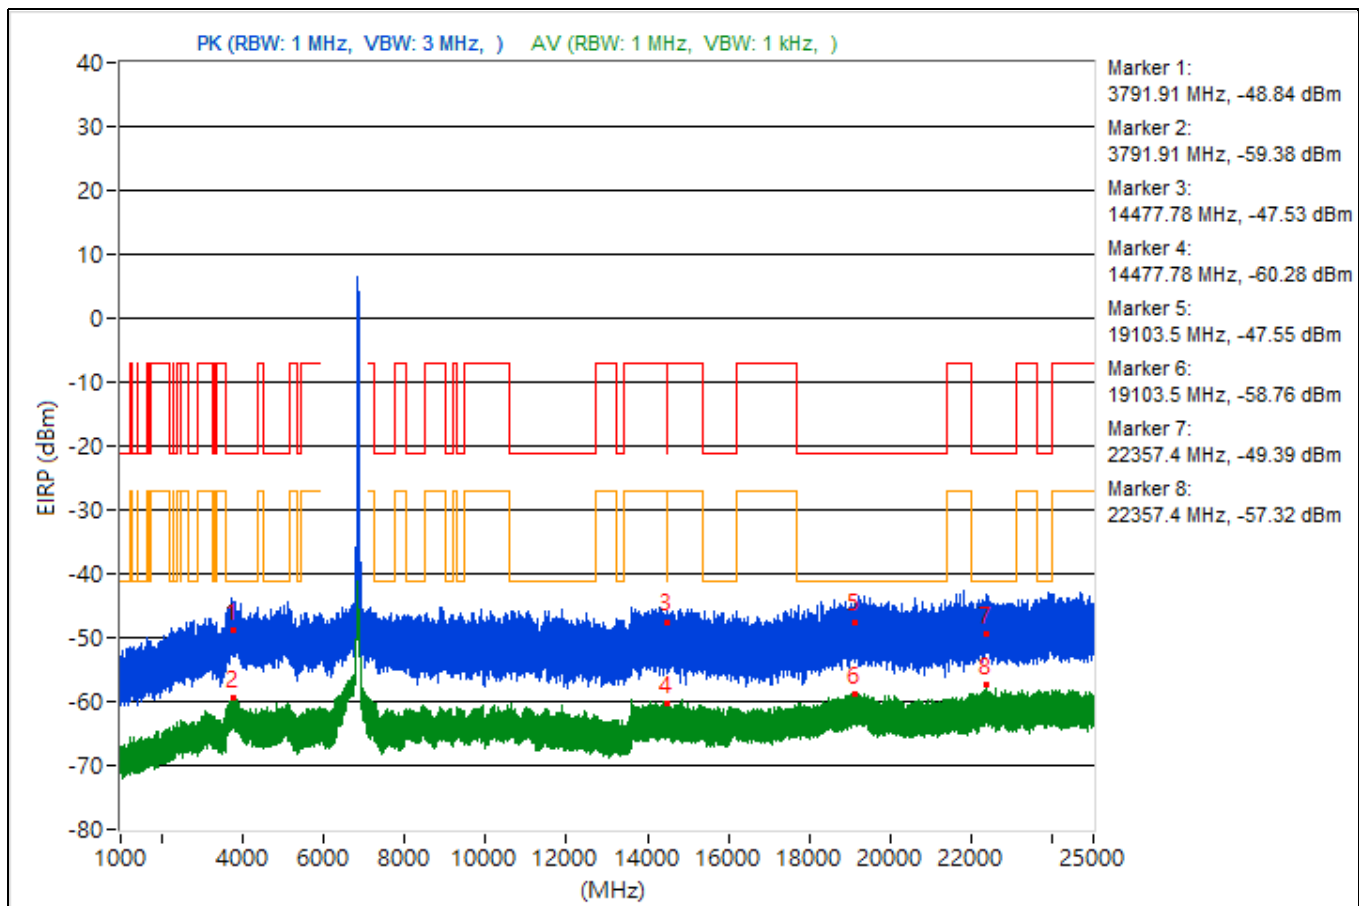


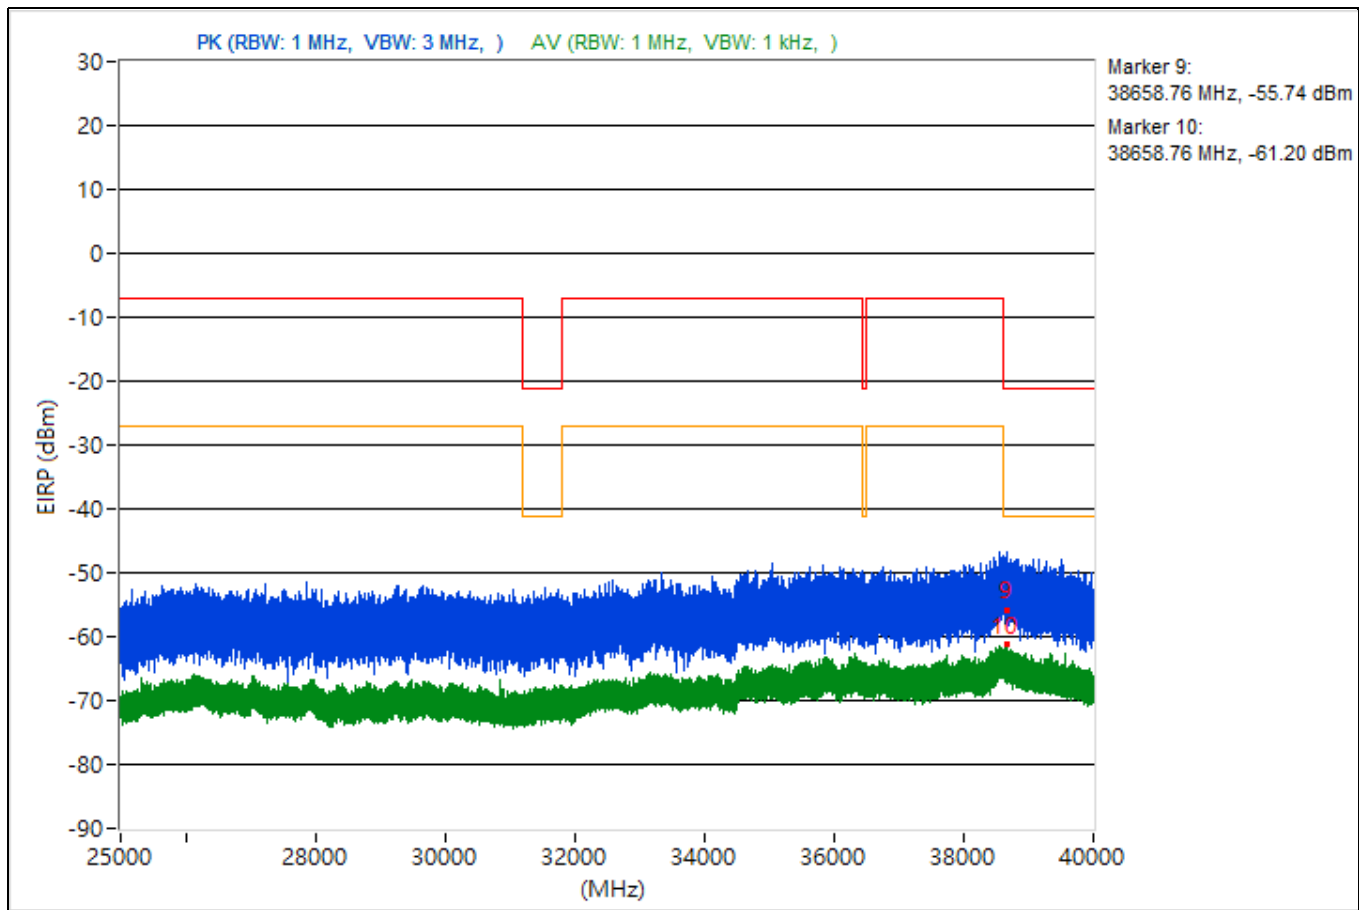


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3828.62	47.36 PK	74	-26.64	-52.82	4.92	-47.9
2	3828.62	35.91 AV	54	-18.09	-64.27	4.92	-59.35
3	8472	44.64 PK	74	-29.36	-55.54	4.92	-50.62
4	8472	35.14 AV	54	-18.86	-65.04	4.92	-60.12
5	19324.2	47.32 PK	74	-26.68	-52.86	4.92	-47.94
6	19324.2	36.78 AV	54	-17.22	-63.4	4.92	-58.48
7	23857.1	45.42 PK	74	-28.58	-54.76	4.92	-49.84
8	23857.1	37.33 AV	54	-16.67	-62.85	4.92	-57.93
9	38733.78	43.26 PK	74	-30.74	-56.92	4.92	-52
10	38733.78	34.07 AV	54	-19.93	-66.11	4.92	-61.19

Note: Margin value = Emission Level - Limit value

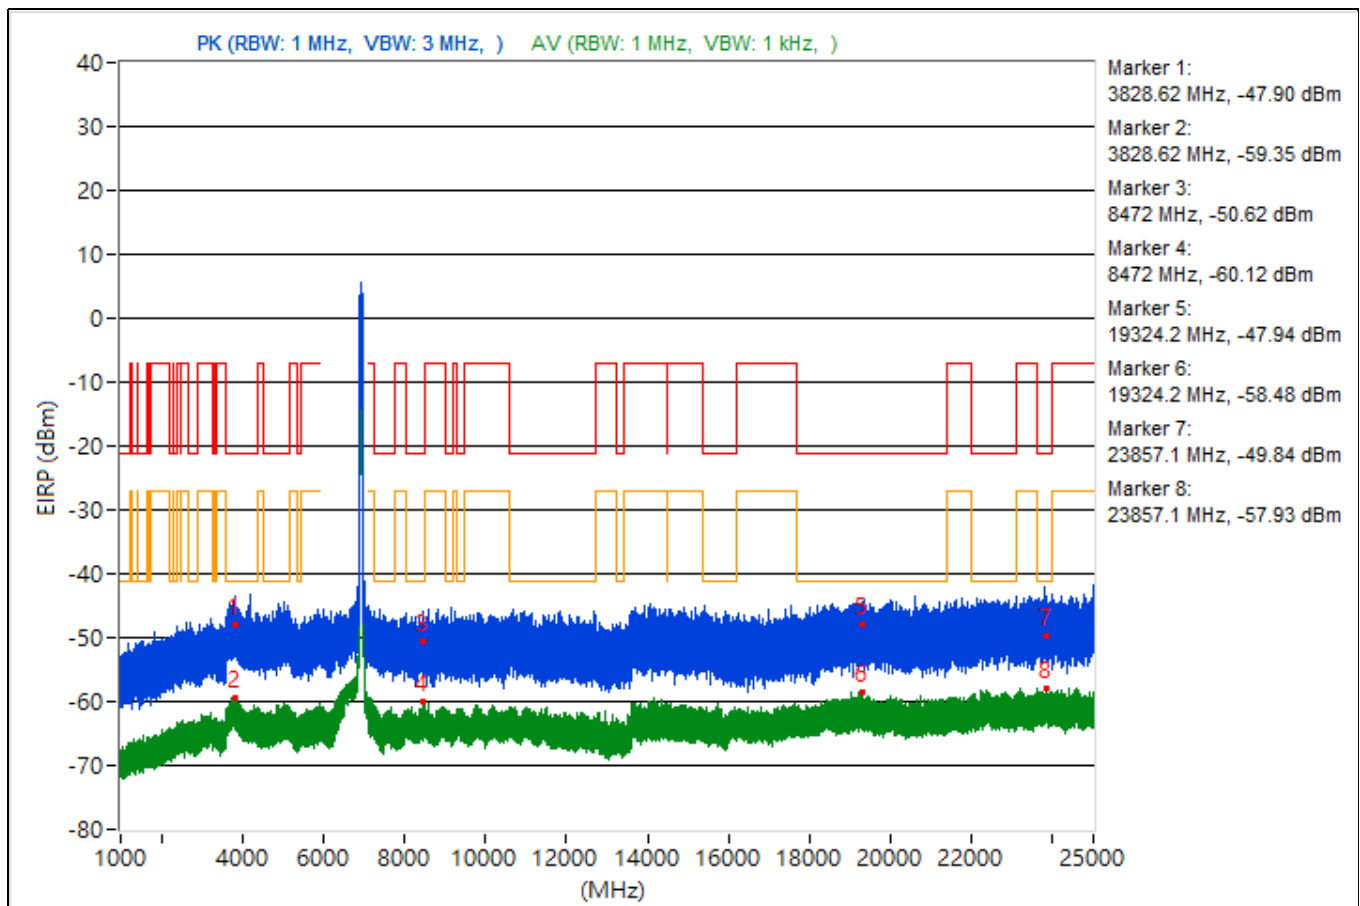


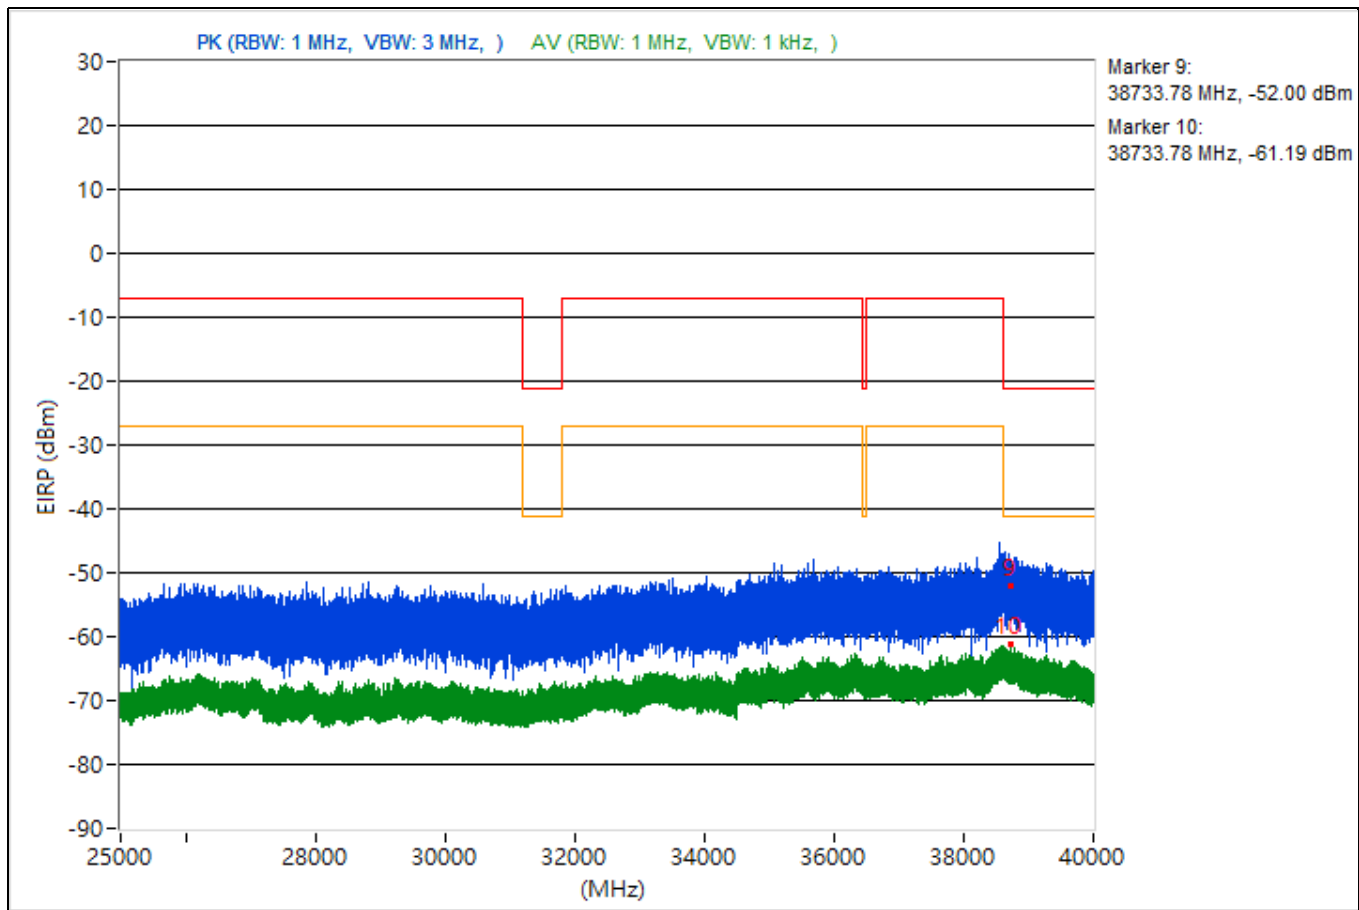


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3704.49	43.63 PK	74	-30.37	-56.55	4.92	-51.63
2	3704.49	35.9 AV	54	-18.1	-64.28	4.92	-59.36
3	7260.64	48.08 PK	74	-25.92	-52.1	4.92	-47.18
4	7260.64	35.25 AV	54	-18.75	-64.93	4.92	-60.01
5	19391.6	43.25 PK	74	-30.75	-56.93	4.92	-52.01
6	19391.6	36.51 AV	54	-17.49	-63.67	4.92	-58.75
7	23675.3	46.09 PK	74	-27.91	-54.09	4.92	-49.17
8	23675.3	37.31 AV	54	-16.69	-62.87	4.92	-57.95
9	38611.38	45.55 PK	74	-28.45	-54.63	4.92	-49.71
10	38611.38	34.23 AV	54	-19.77	-65.95	4.92	-61.03

Note: Margin value = Emission Level - Limit value

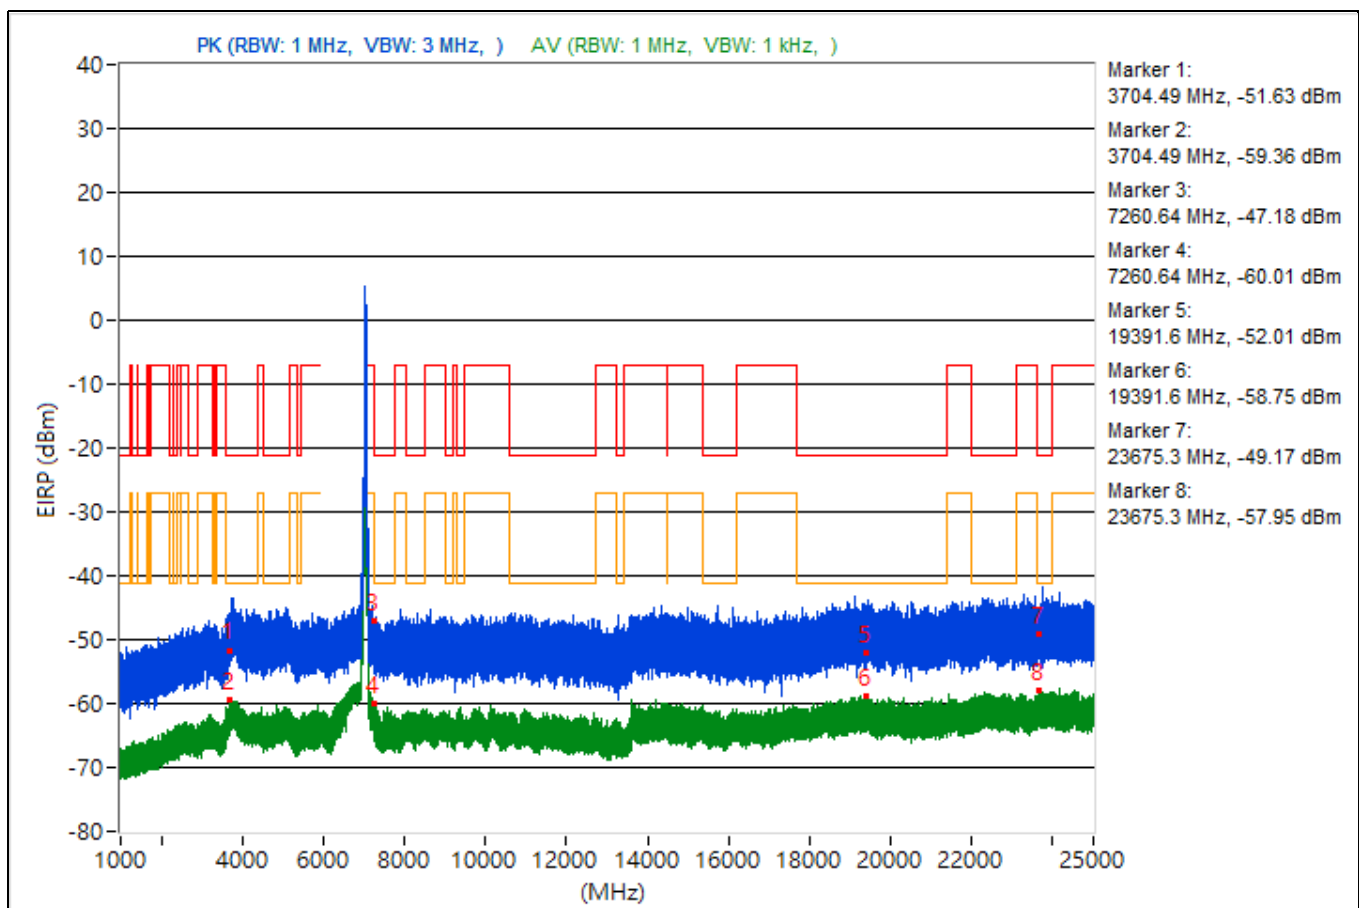


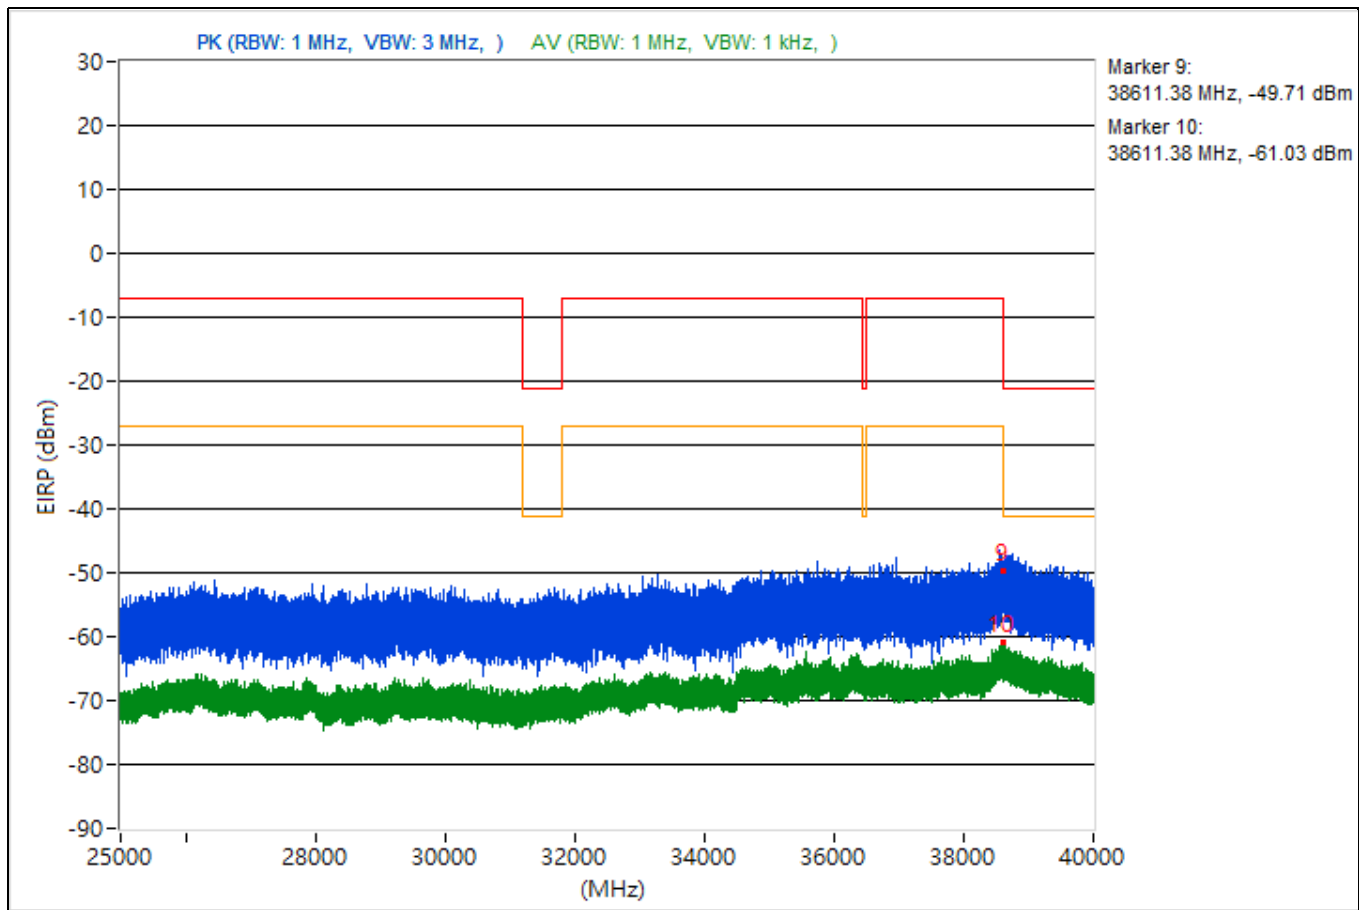


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3771.69	49.33 PK	74	-24.67	-50.85	4.92	-45.93
2	3771.69	35.53 AV	54	-18.47	-64.65	4.92	-59.73
3	14470.49	46.53 PK	74	-27.47	-53.65	4.92	-48.73
4	14470.49	35.09 AV	54	-18.91	-65.09	4.92	-60.17
5	20635.8	45.79 PK	74	-28.21	-54.39	4.92	-49.47
6	20635.8	36.84 AV	54	-17.16	-63.34	4.92	-58.42
7	23980.3	49.85 PK	74	-24.15	-50.33	4.92	-45.41
8	23980.3	37.8 AV	54	-16.2	-62.38	4.92	-57.46
9	38626.76	43.16 PK	74	-30.84	-57.02	4.92	-52.1
10	38626.76	33.6 AV	54	-20.4	-66.58	4.92	-61.66

Note: Margin value = Emission Level - Limit value

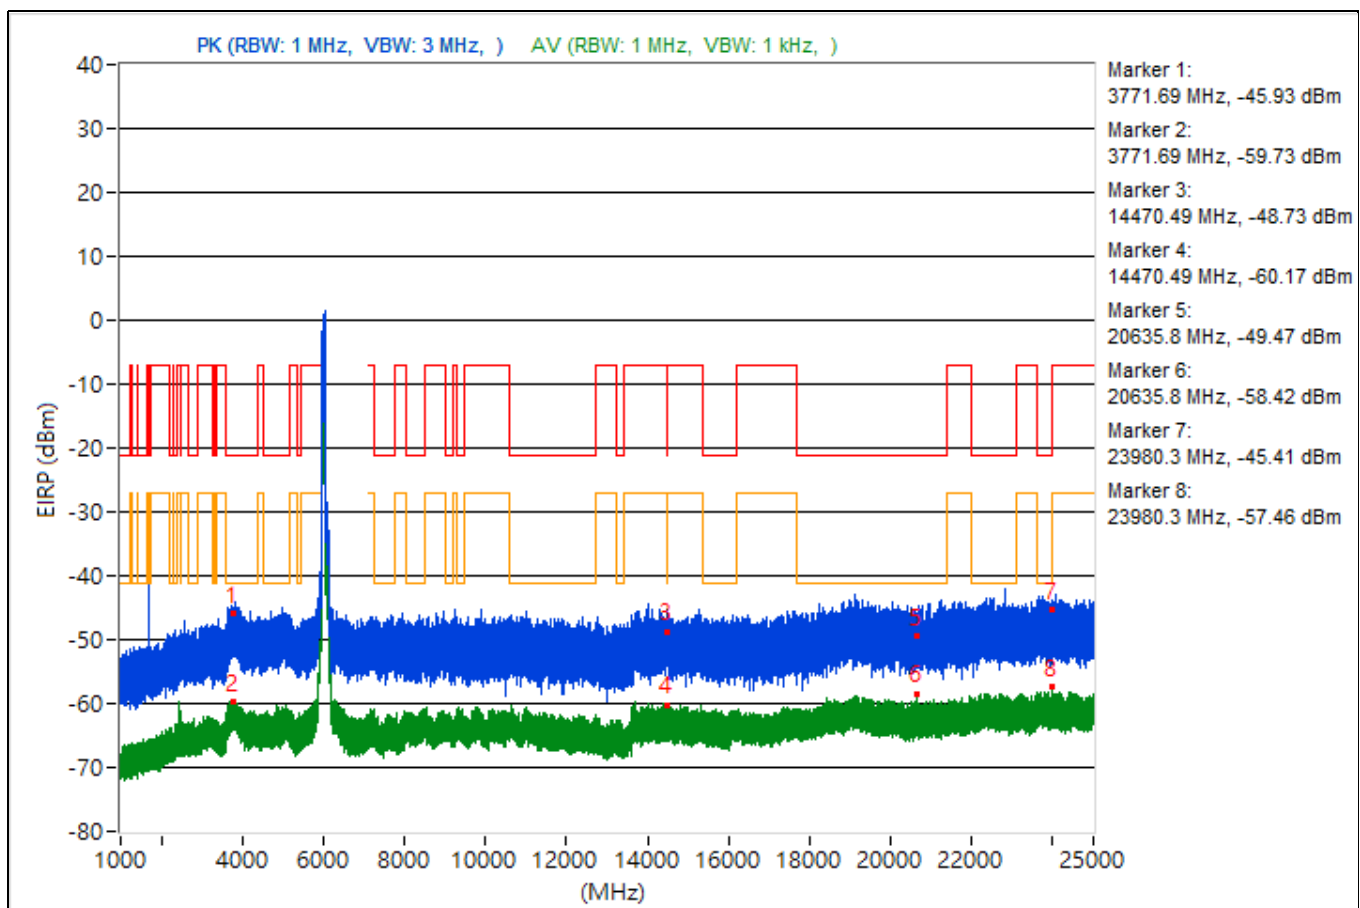


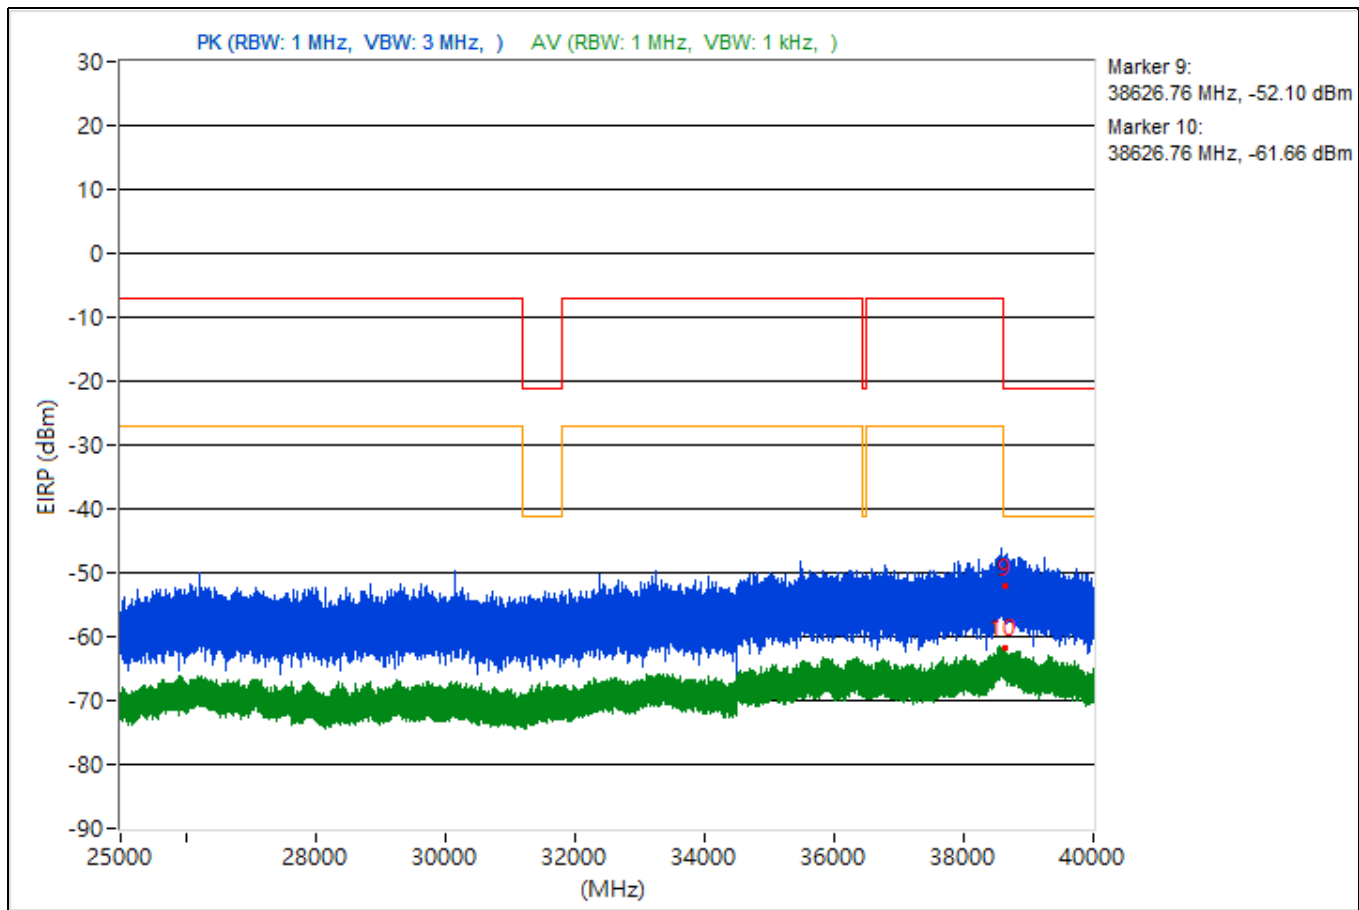


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3748.43	47.35 PK	74	-26.65	-52.83	4.92	-47.91
2	3748.43	36.33 AV	54	-17.67	-63.85	4.92	-58.93
3	15411.38	42.17 PK	74	-31.83	-58.01	4.92	-53.09
4	15411.38	34.89 AV	54	-19.11	-65.29	4.92	-60.37
5	19180.8	48.36 PK	74	-25.64	-51.82	4.92	-46.9
6	19180.8	36.7 AV	54	-17.3	-63.48	4.92	-58.56
7	22790.4	46.3 PK	74	-27.7	-53.88	4.92	-48.96
8	22790.4	37.86 AV	54	-16.14	-62.32	4.92	-57.4
9	38629.33	44.13 PK	74	-29.87	-56.05	4.92	-51.13
10	38629.33	33.56 AV	54	-20.44	-66.62	4.92	-61.7

Note: Margin value = Emission Level - Limit value

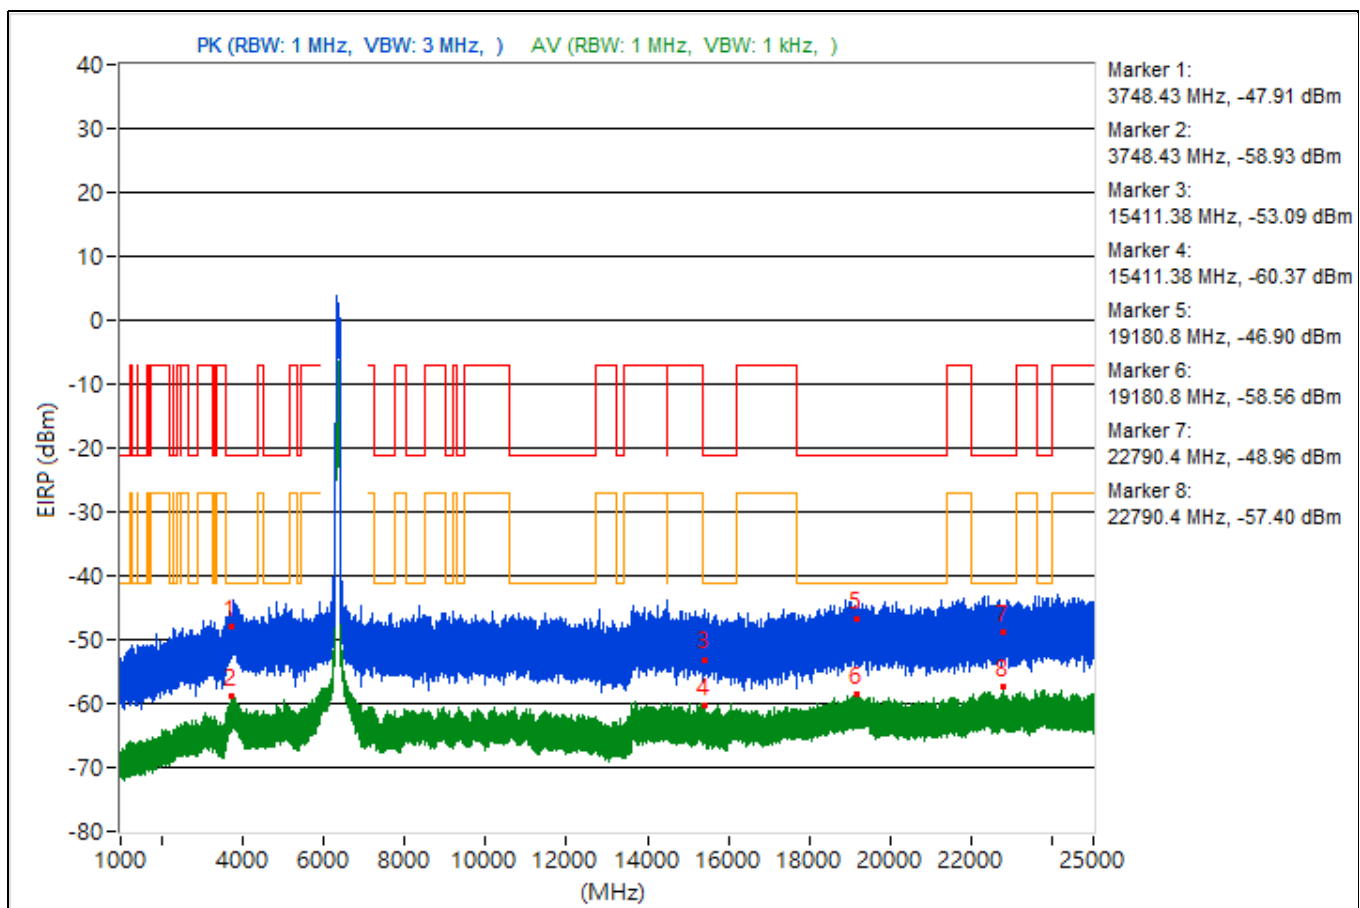


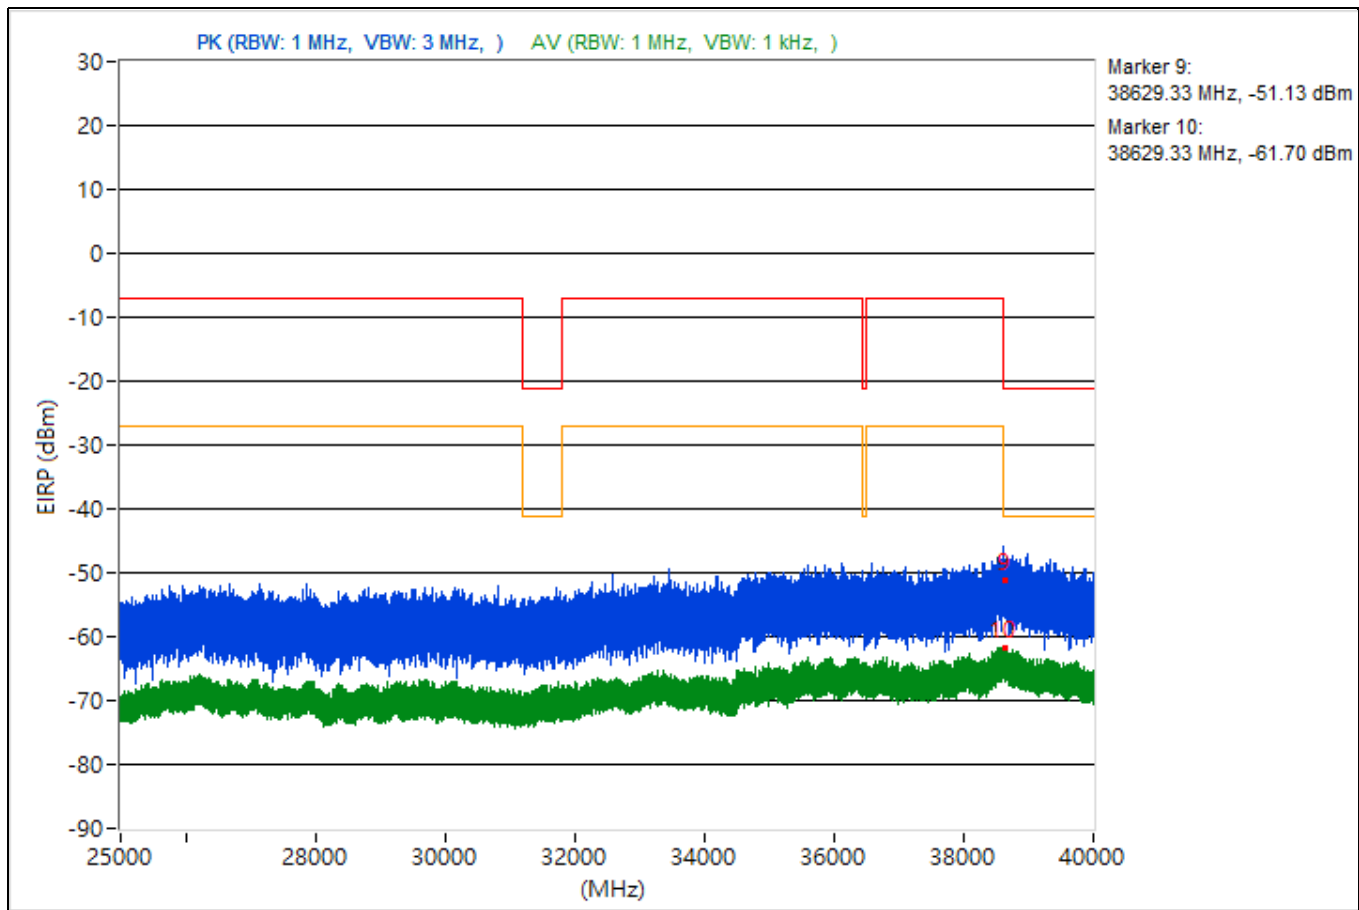


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3776.04	46.99 PK	74	-27.01	-53.19	4.92	-48.27
2	3776.04	36.29 AV	54	-17.71	-63.89	4.92	-58.97
3	9331.82	41.1 PK	74	-32.9	-59.08	4.92	-54.16
4	9331.82	34.92 AV	54	-19.08	-65.26	4.92	-60.34
5	19113.2	48.26 PK	74	-25.74	-51.92	4.92	-47
6	19113.2	36.56 AV	54	-17.44	-63.62	4.92	-58.7
7	23750.1	50.12 PK	74	-23.88	-50.06	4.92	-45.14
8	23750.1	37.67 AV	54	-16.33	-62.51	4.92	-57.59
9	38677.69	41.06 PK	74	-32.94	-59.12	4.92	-54.2
10	38677.69	34 AV	54	-20	-66.18	4.92	-61.26

Note: Margin value = Emission Level - Limit value

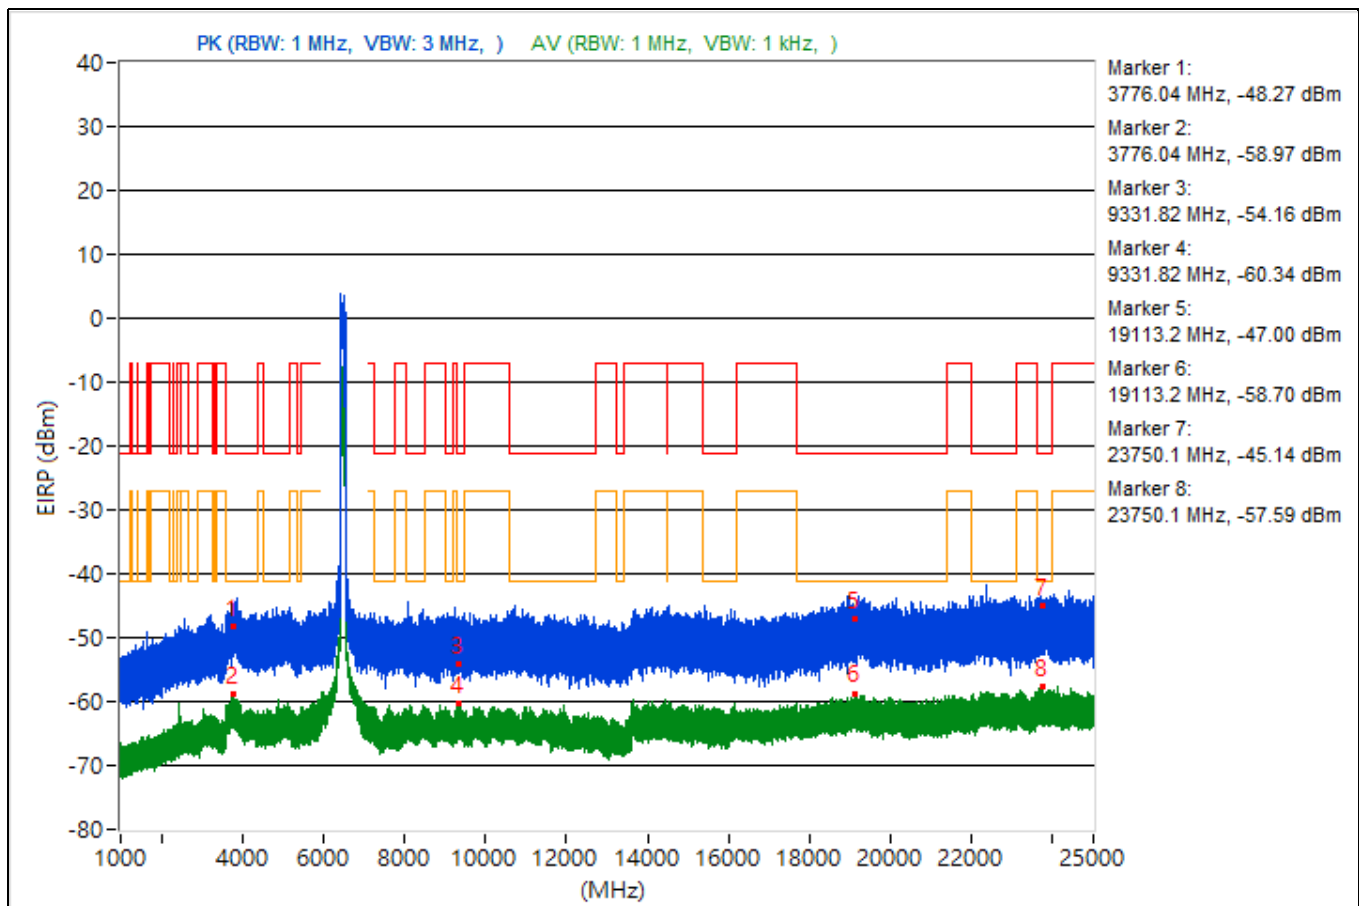


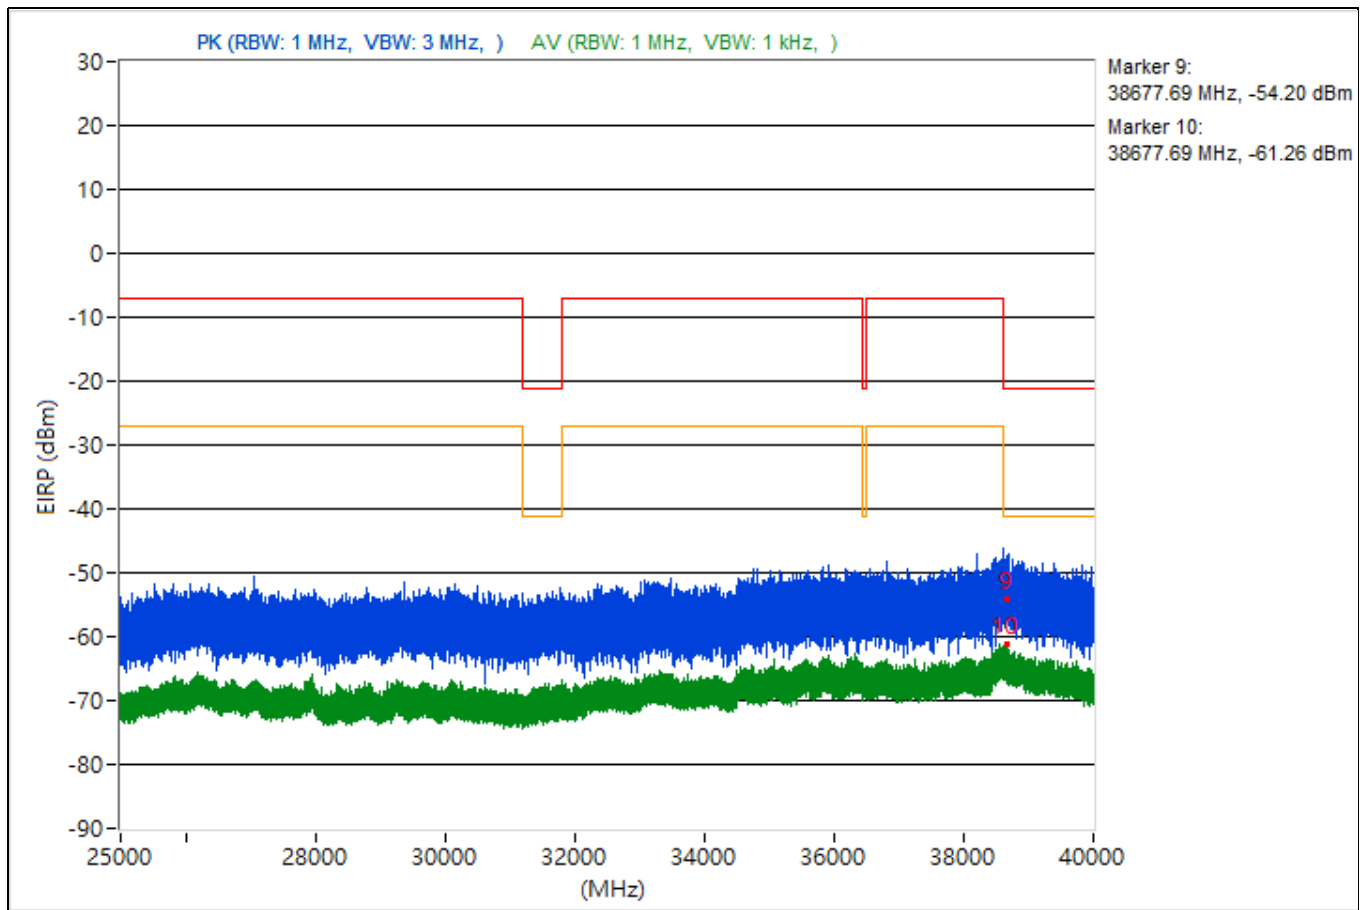


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3768.11	47.61 PK	74	-26.39	-52.57	4.92	-47.65
2	3768.11	36.17 AV	54	-17.83	-64.01	4.92	-59.09
3	14473.51	45.45 PK	74	-28.55	-54.73	4.92	-49.81
4	14473.51	35.32 AV	54	-18.68	-64.86	4.92	-59.94
5	19278.1	46.37 PK	74	-27.63	-53.81	4.92	-48.89
6	19278.1	36.77 AV	54	-17.23	-63.41	4.92	-58.49
7	23654.6	45.28 PK	74	-28.72	-54.9	4.92	-49.98
8	23654.6	37.86 AV	54	-16.14	-62.32	4.92	-57.4
9	38646.04	41.61 PK	74	-32.39	-58.57	4.92	-53.65
10	38646.04	33.93 AV	54	-20.07	-66.25	4.92	-61.33

Note: Margin value = Emission Level - Limit value

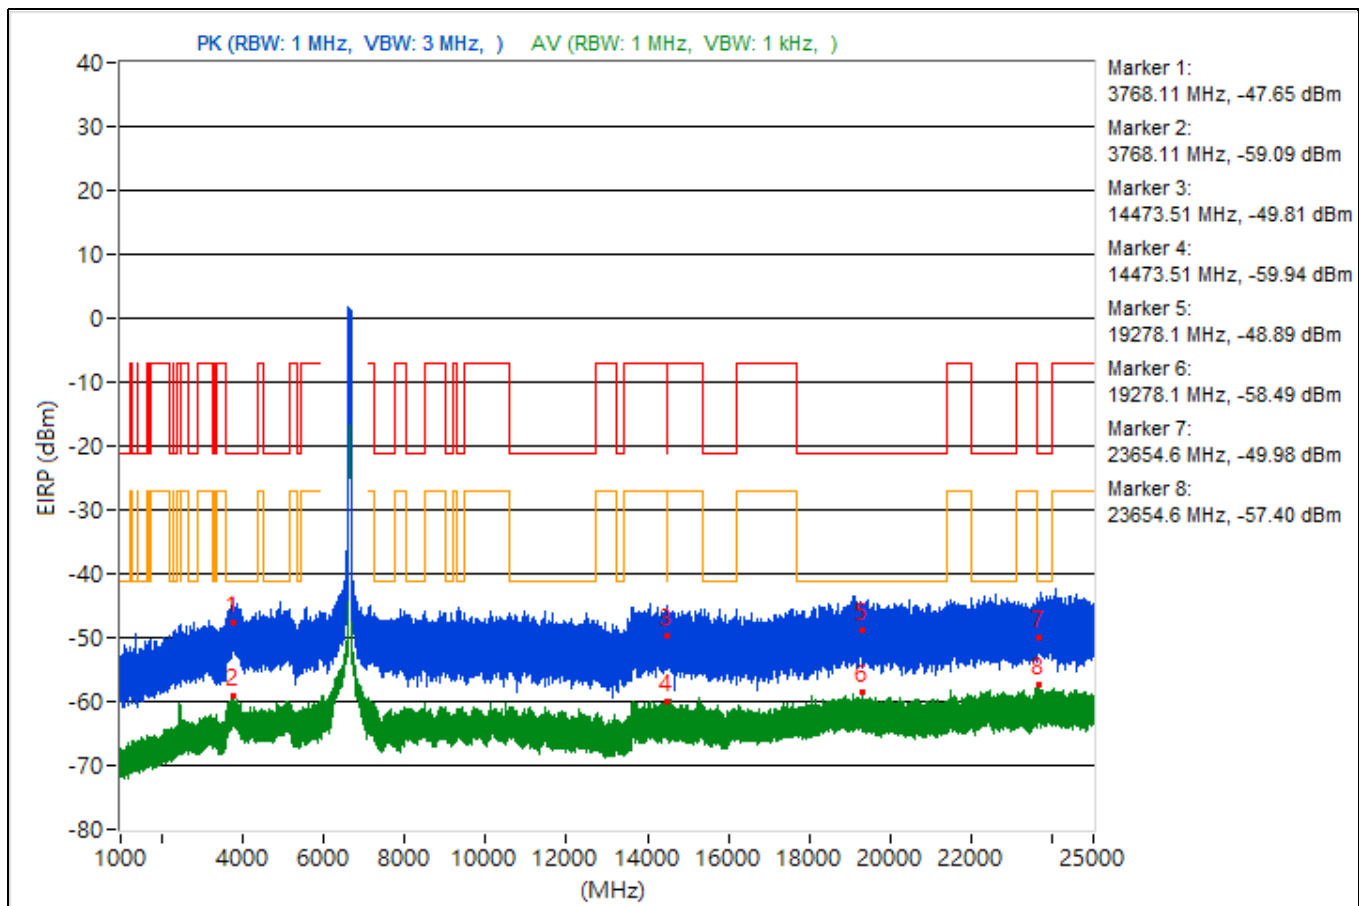


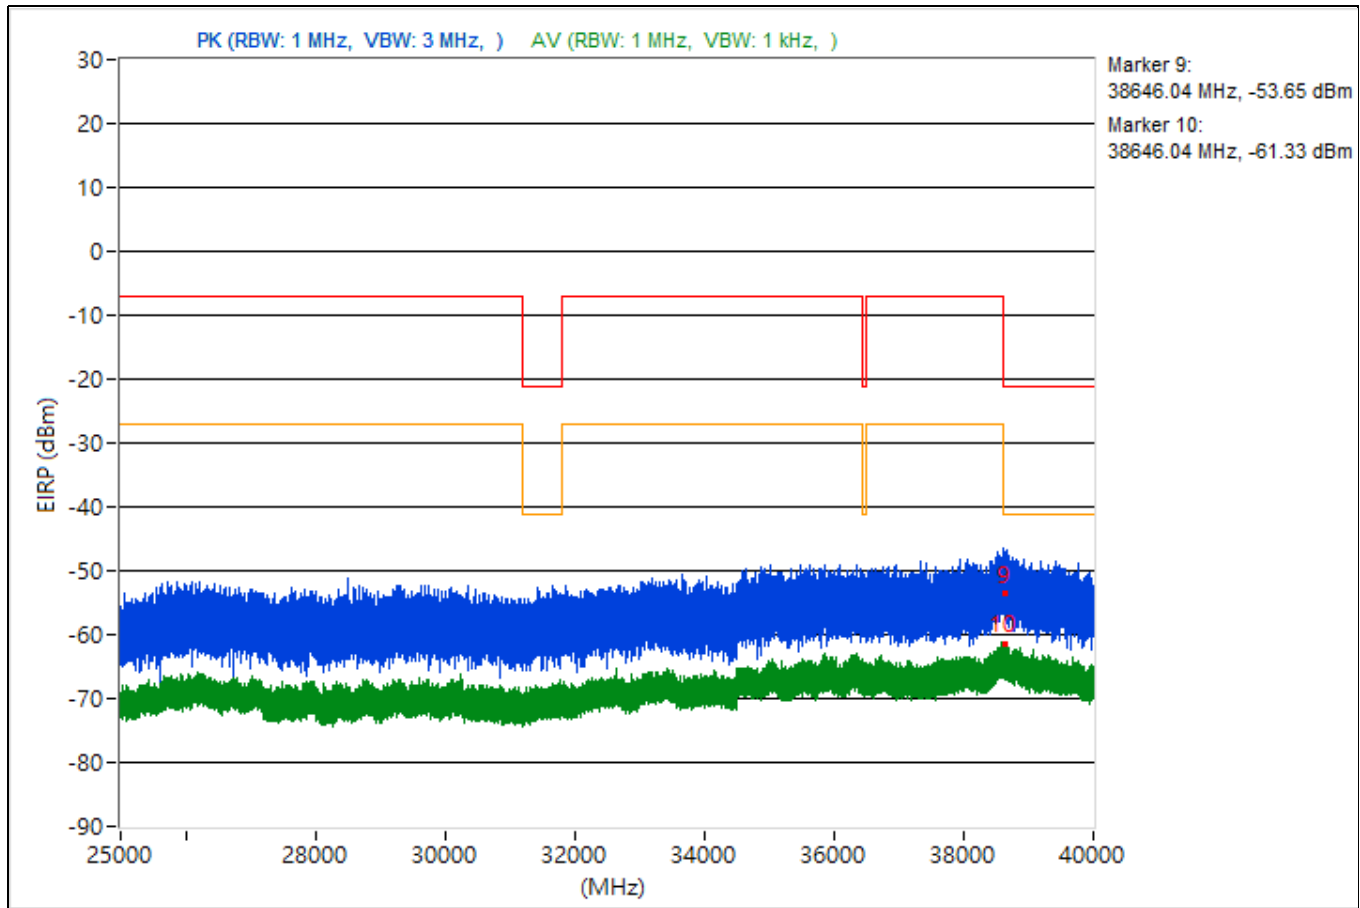


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3846.82	45.87 PK	74	-28.13	-54.31	4.92	-49.39
2	3846.82	36.12 AV	54	-17.88	-64.06	4.92	-59.14
3	7253.64	46.36 PK	74	-27.64	-53.82	4.92	-48.9
4	7253.64	35.08 AV	54	-18.92	-65.1	4.92	-60.18
5	19571.2	44.96 PK	74	-29.04	-55.22	4.92	-50.3
6	19571.2	36.48 AV	54	-17.52	-63.7	4.92	-58.78
7	23701.3	45.08 PK	74	-28.92	-55.1	4.92	-50.18
8	23701.3	37.48 AV	54	-16.52	-62.7	4.92	-57.78
9	38630.93	42.24 PK	74	-31.76	-57.94	4.92	-53.02
10	38630.93	33.34 AV	54	-20.66	-66.84	4.92	-61.92

Note: Margin value = Emission Level - Limit value

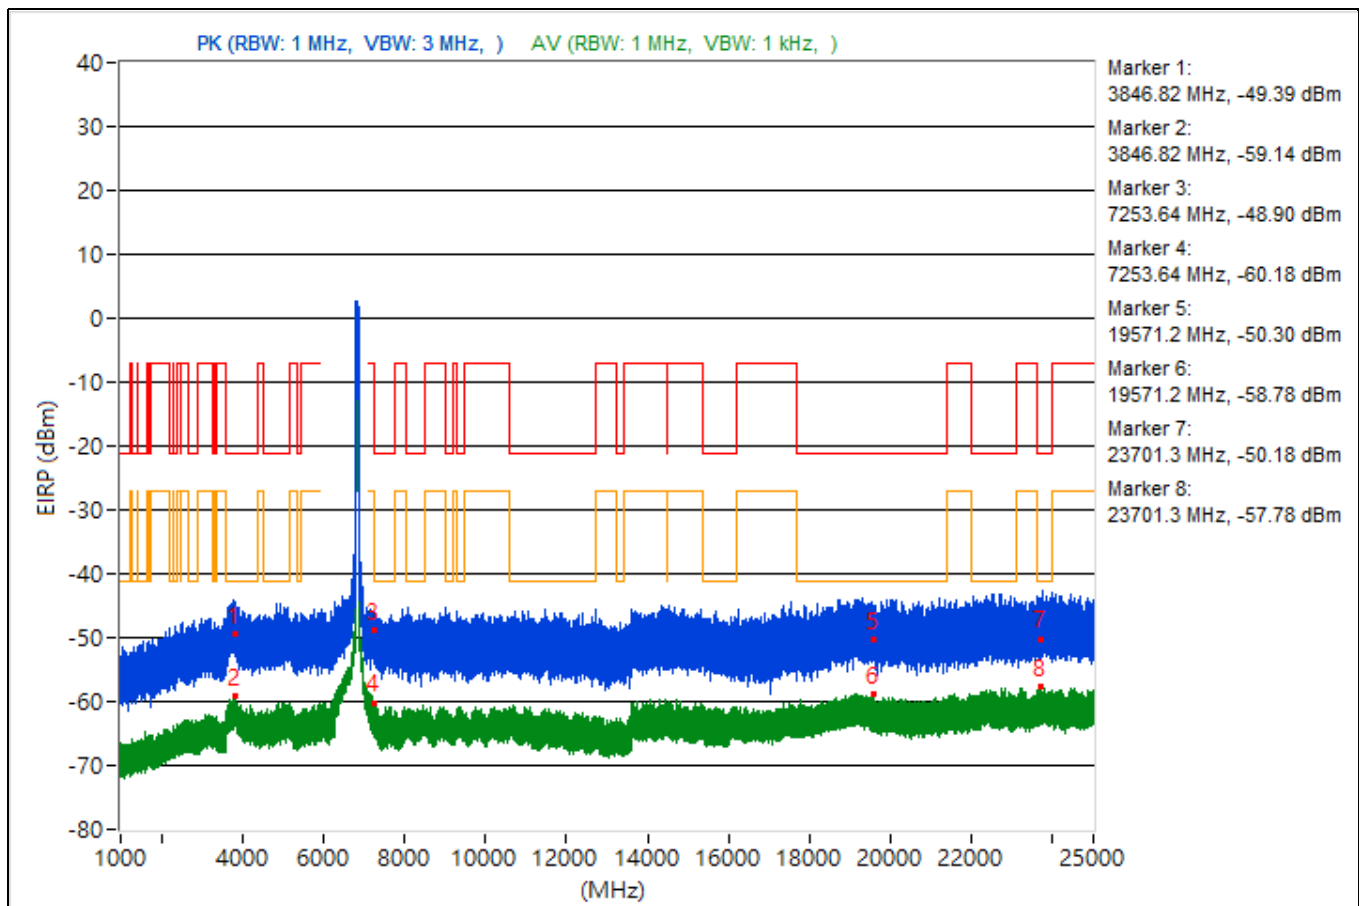


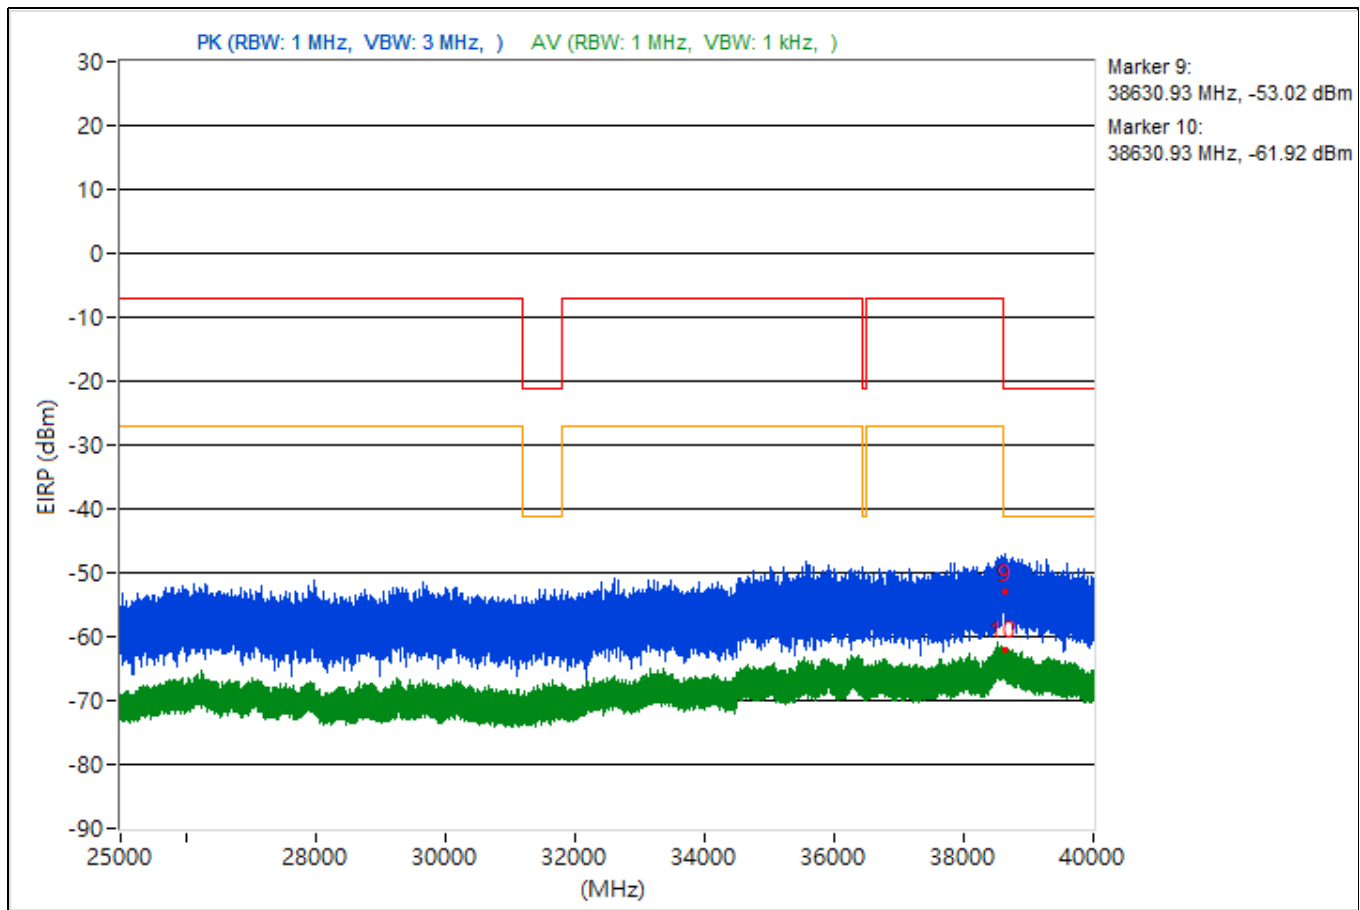


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3796.81	49.06 PK	74	-24.94	-51.12	4.92	-46.2
2	3796.81	36.77 AV	54	-17.23	-63.41	4.92	-58.49
3	7255.51	47.39 PK	74	-26.61	-52.79	4.92	-47.87
4	7255.51	36.01 AV	54	-17.99	-64.17	4.92	-59.25
5	19068.4	45.44 PK	74	-28.56	-54.74	4.92	-49.82
6	19068.4	36.91 AV	54	-17.09	-63.27	4.92	-58.35
7	22438.3	47.57 PK	74	-26.43	-52.61	4.92	-47.69
8	22438.3	37.57 AV	54	-16.43	-62.61	4.92	-57.69
9	38601.87	47.36 PK	74	-26.64	-52.82	4.92	-47.9
10	38601.87	34.08 AV	54	-19.92	-66.1	4.92	-61.18

Note: Margin value = Emission Level - Limit value

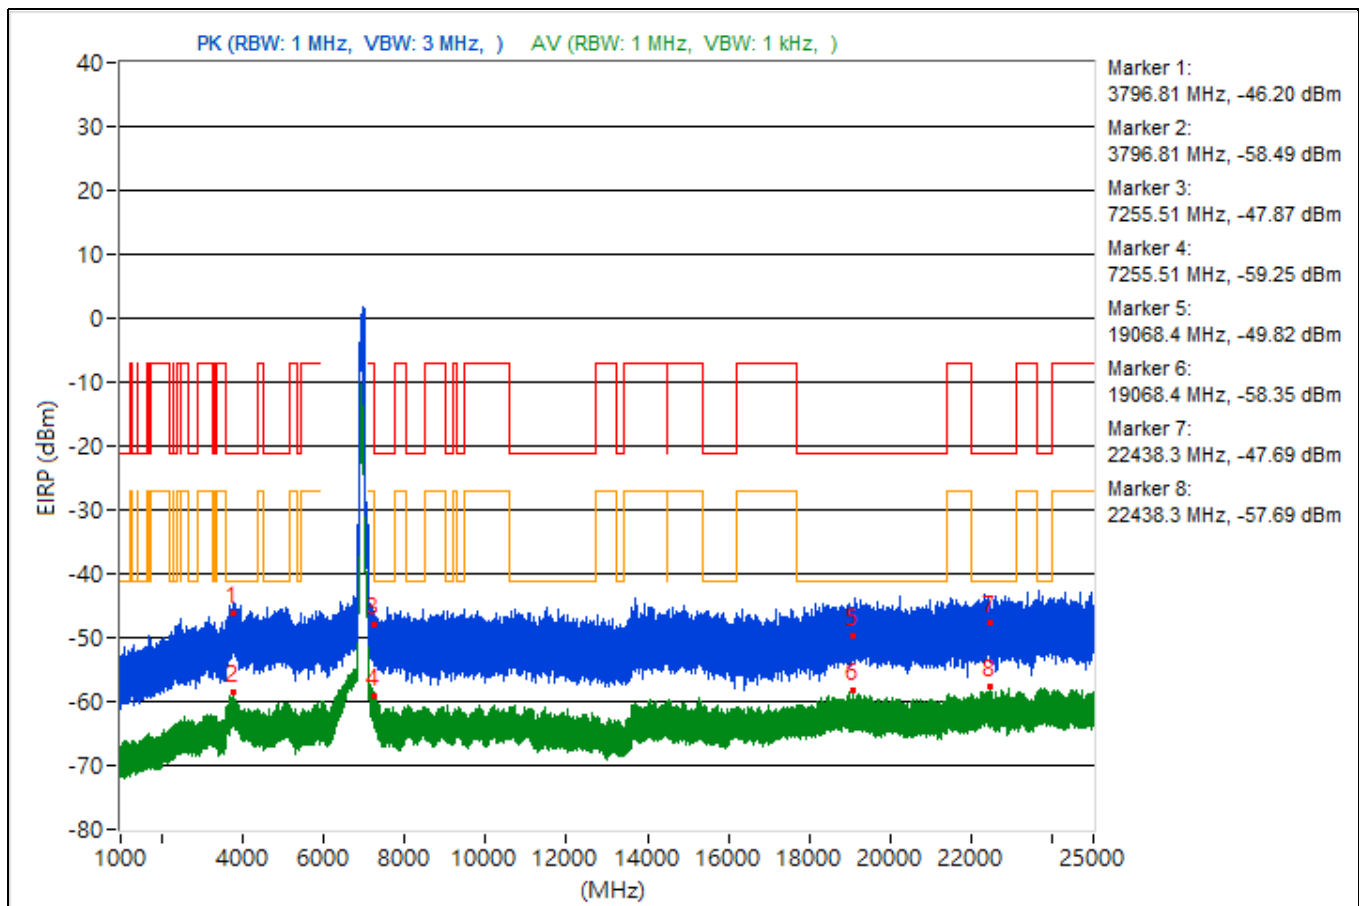


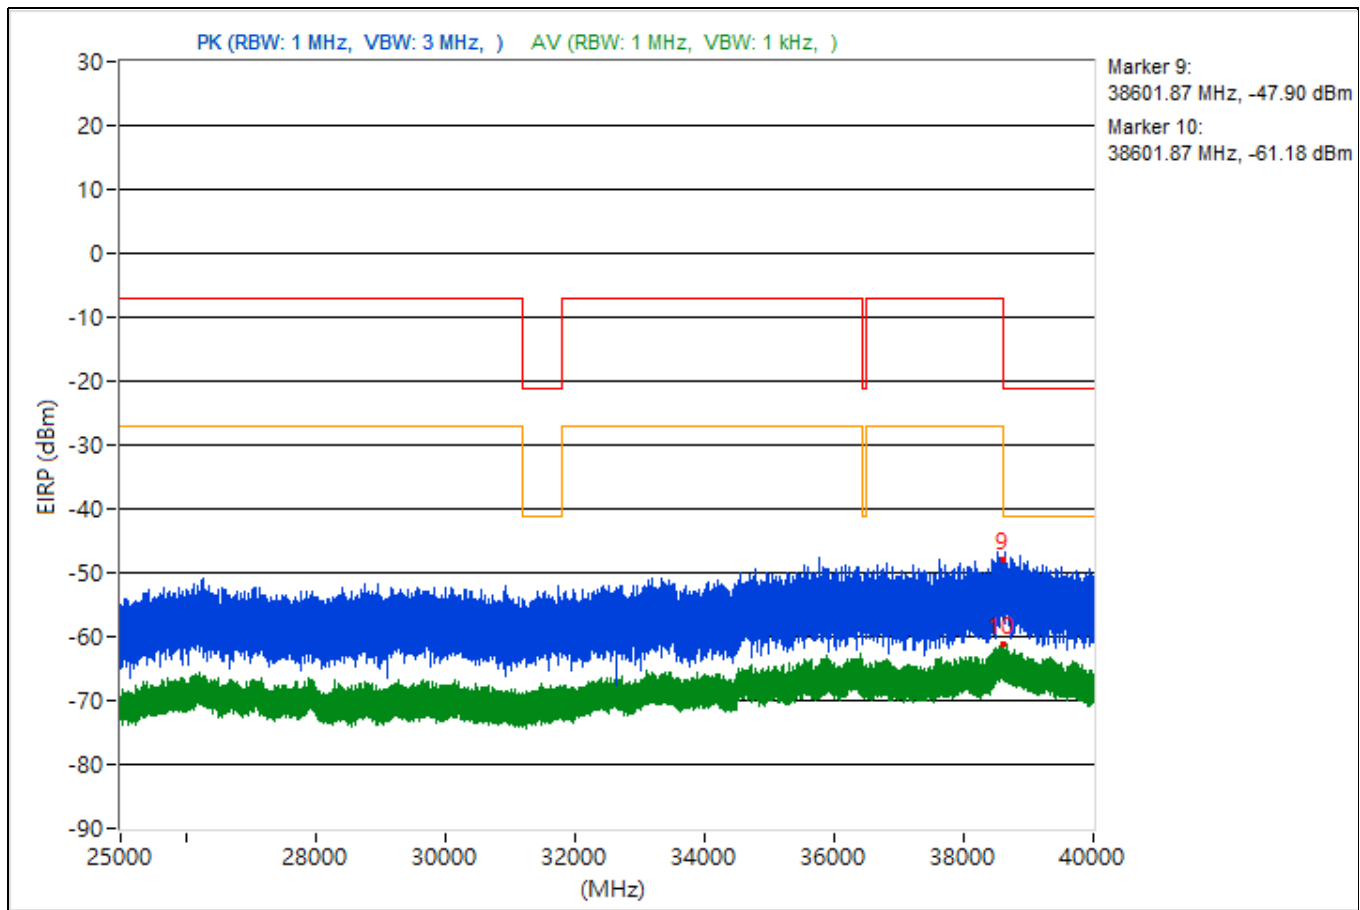


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3837.1	46.95 PK	74	-27.05	-53.23	4.92	-48.31
2	3837.1	36.18 AV	54	-17.82	-64	4.92	-59.08
3	14495.11	46.4 PK	74	-27.6	-53.78	4.92	-48.86
4	14495.11	34.73 AV	54	-19.27	-65.45	4.92	-60.53
5	19086.8	45.65 PK	74	-28.35	-54.53	4.92	-49.61
6	19086.8	36.45 AV	54	-17.55	-63.73	4.92	-58.81
7	23935.4	48.02 PK	74	-25.98	-52.16	4.92	-47.24
8	23935.4	37.34 AV	54	-16.66	-62.84	4.92	-57.92
9	38605.33	44.43 PK	74	-29.57	-55.75	4.92	-50.83
10	38605.33	33.09 AV	54	-20.91	-67.09	4.92	-62.17

Note: Margin value = Emission Level - Limit value

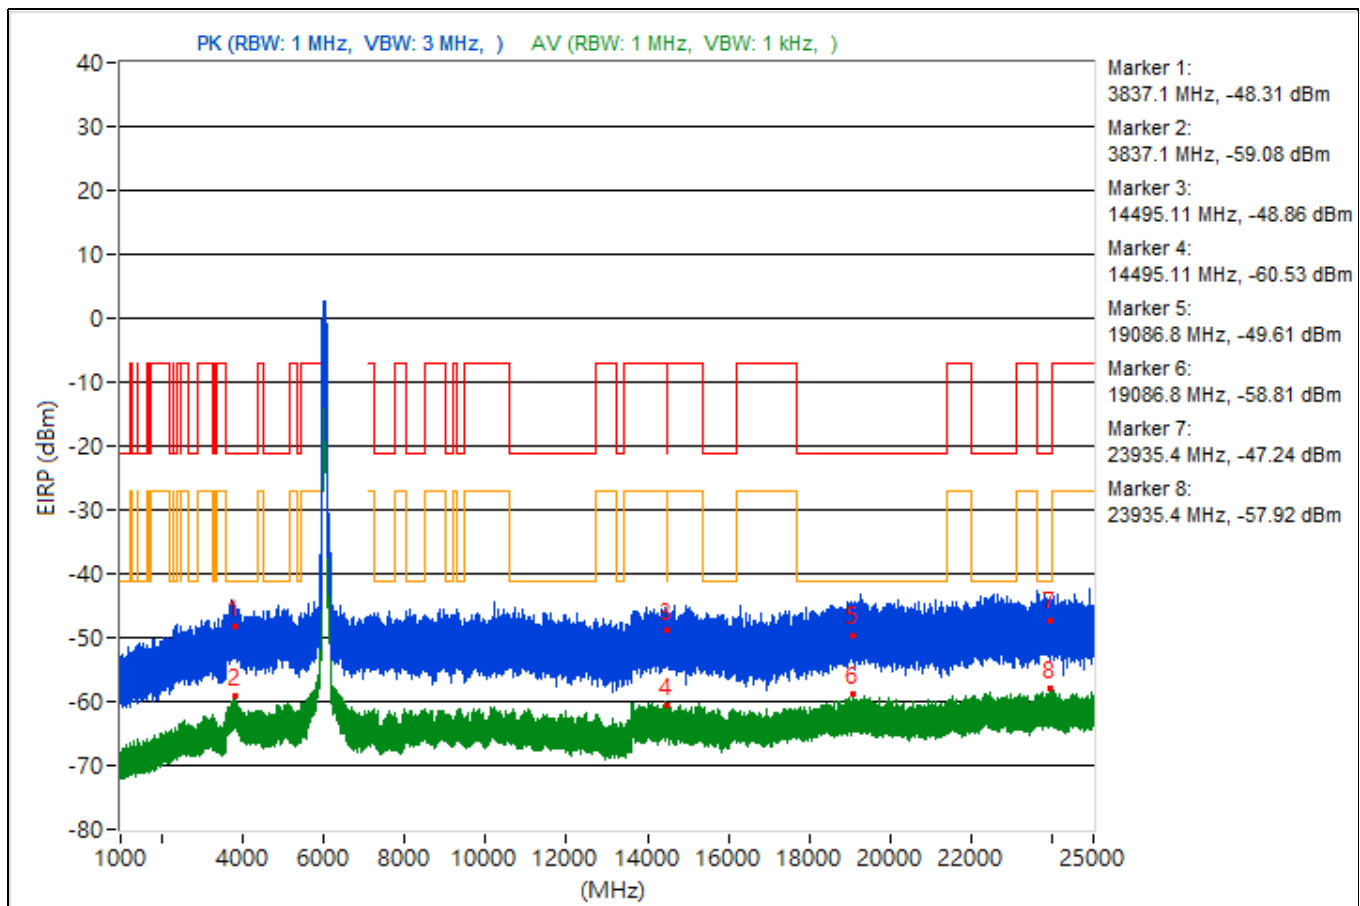


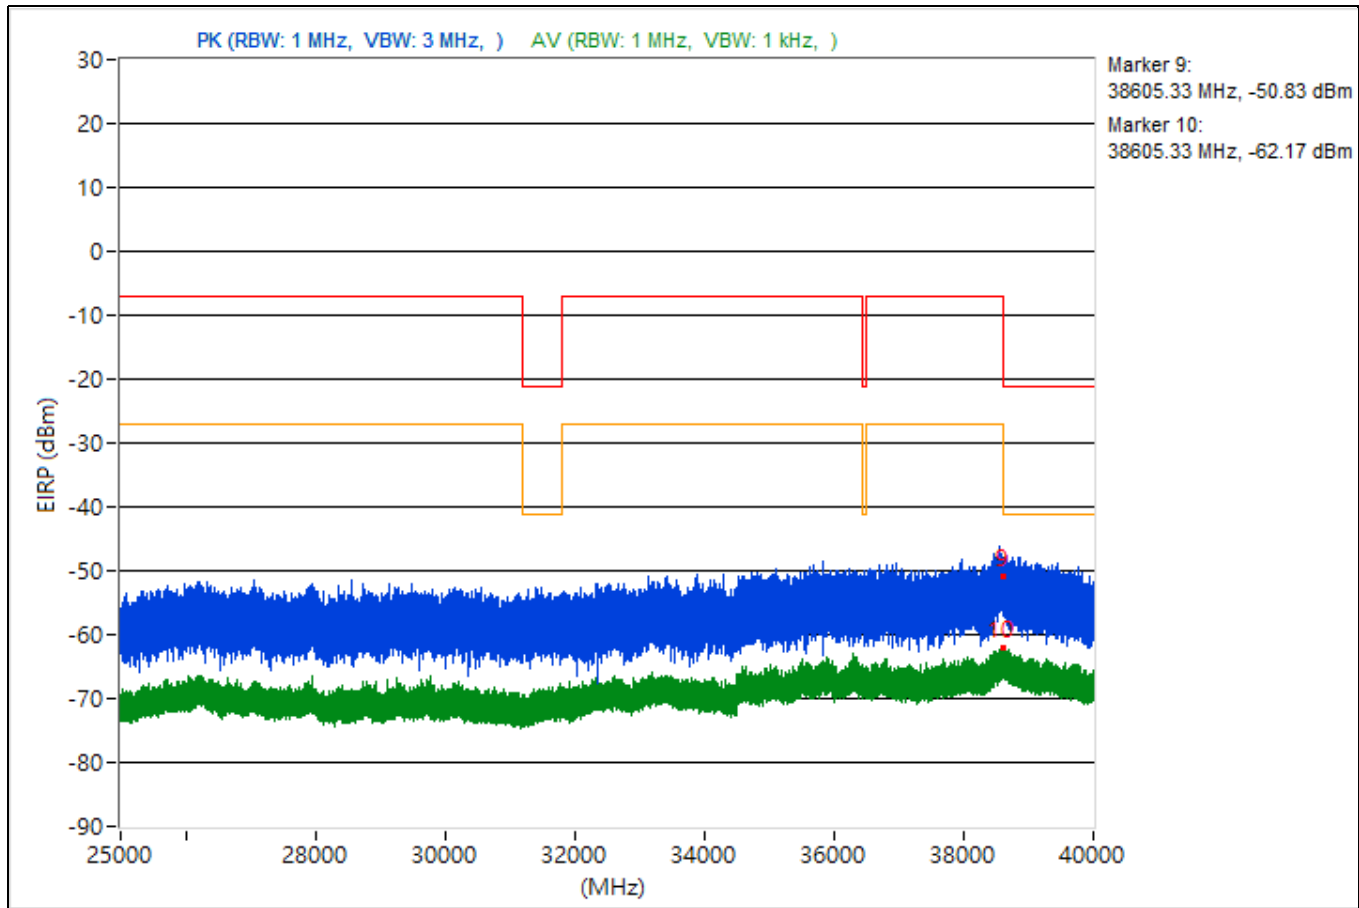


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.31	43.68 PK	74	-30.32	-56.5	4.92	-51.58
2	3807.31	35.92 AV	54	-18.08	-64.26	4.92	-59.34
3	14488.44	44.1 PK	74	-29.9	-56.08	4.92	-51.16
4	14488.44	35.12 AV	54	-18.88	-65.06	4.92	-60.14
5	19107.7	44.83 PK	74	-29.17	-55.35	4.92	-50.43
6	19107.7	36.42 AV	54	-17.58	-63.76	4.92	-58.84
7	23794.5	47.23 PK	74	-26.77	-52.95	4.92	-48.03
8	23794.5	37.07 AV	54	-16.93	-63.11	4.92	-58.19
9	38705.42	41.12 PK	74	-32.88	-59.06	4.92	-54.14
10	38705.42	32.92 AV	54	-21.08	-67.26	4.92	-62.34

Note: Margin value = Emission Level - Limit value

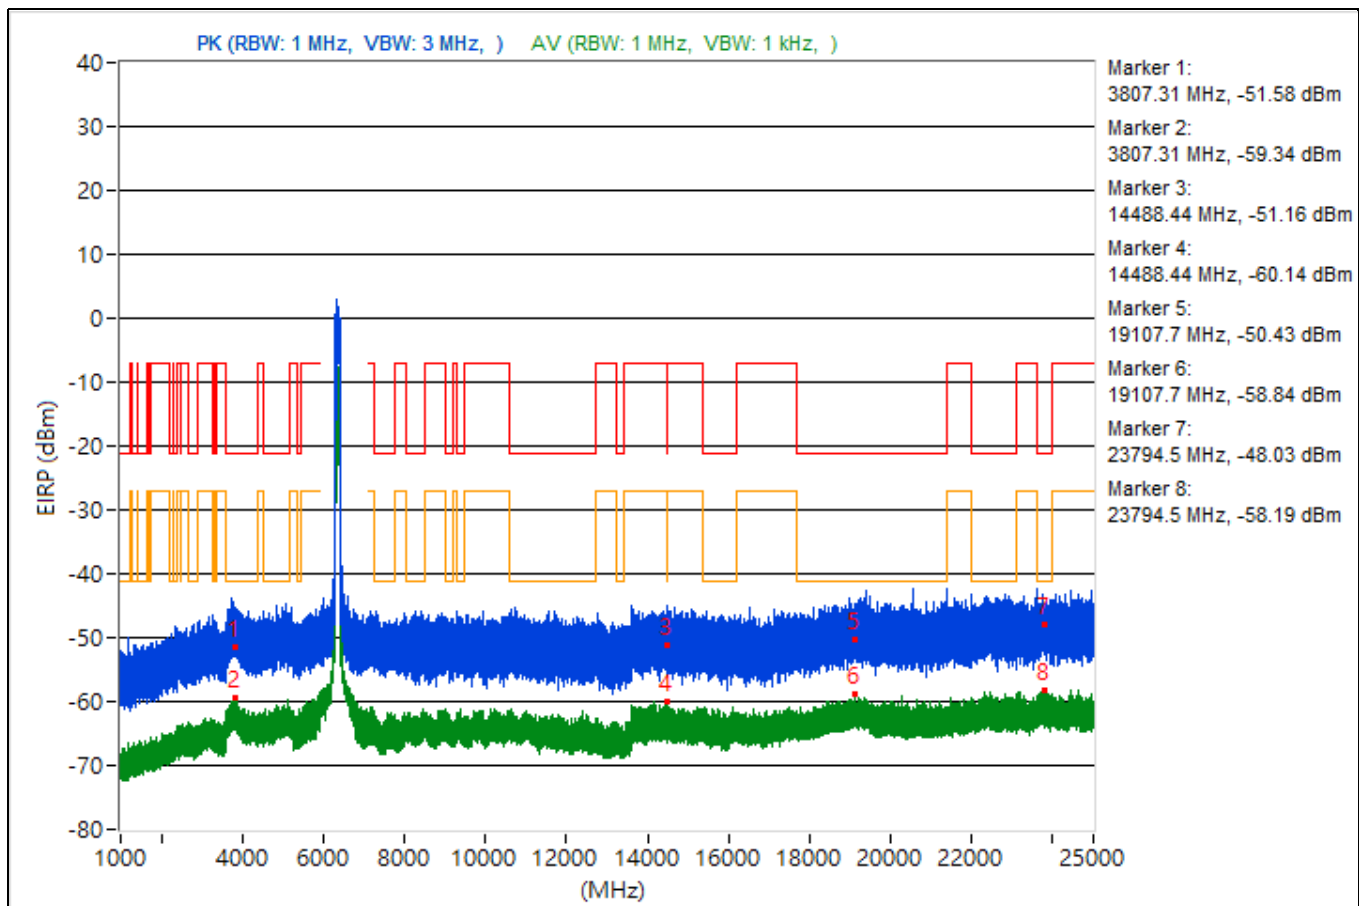


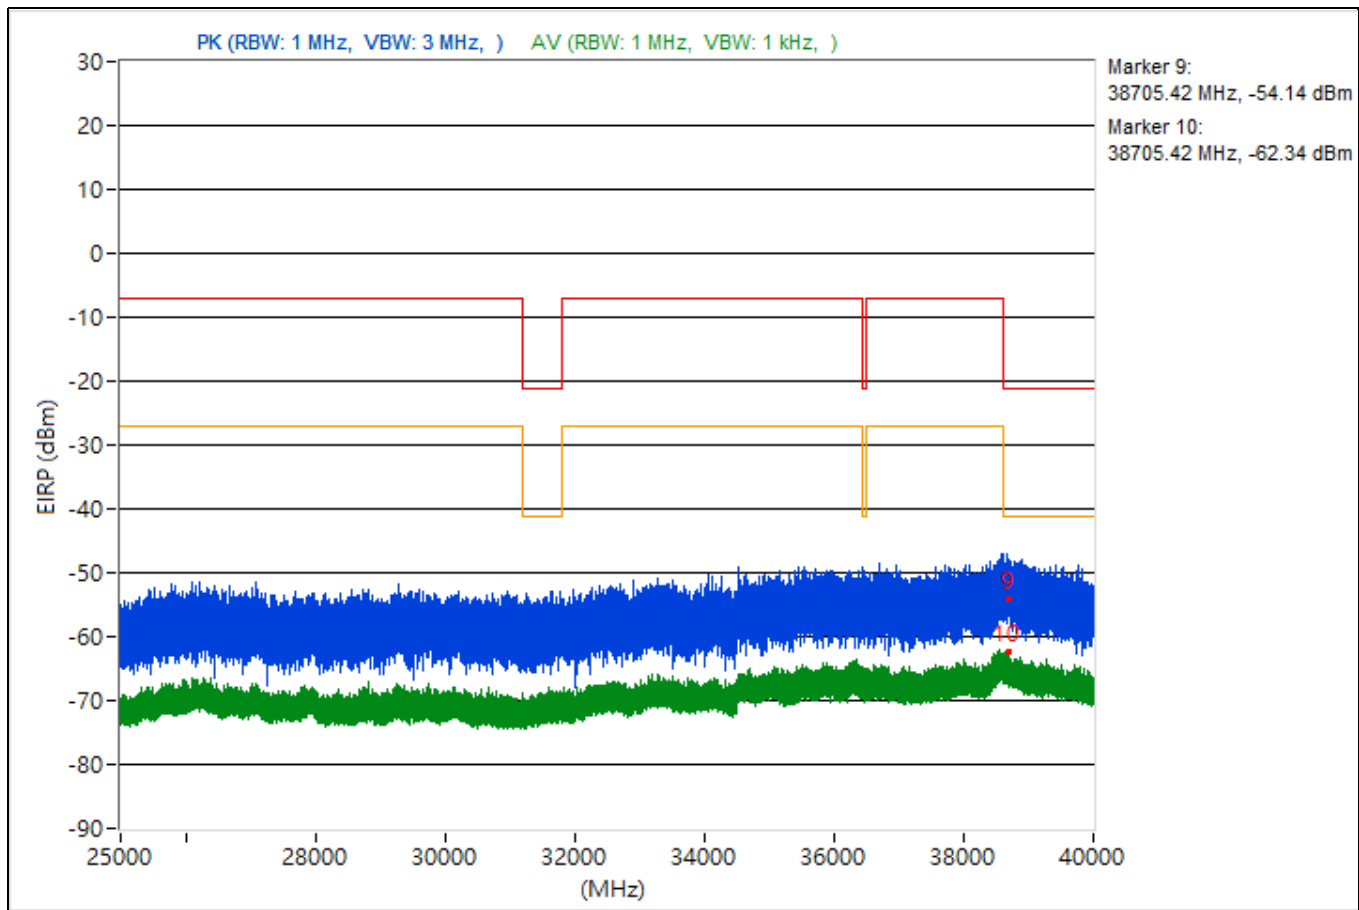


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3842.78	47.45 PK	74	-26.55	-52.73	4.92	-47.81
2	3842.78	35.95 AV	54	-18.05	-64.23	4.92	-59.31
3	14477.07	47.03 PK	74	-26.97	-53.15	4.92	-48.23
4	14477.07	35.53 AV	54	-18.47	-64.65	4.92	-59.73
5	19971	46.26 PK	74	-27.74	-53.92	4.92	-49
6	19971	36.23 AV	54	-17.77	-63.95	4.92	-59.03
7	23711.9	48.22 PK	74	-25.78	-51.96	4.92	-47.04
8	23711.9	37.06 AV	54	-16.94	-63.12	4.92	-58.2
9	38612.98	41.94 PK	74	-32.06	-58.24	4.92	-53.32
10	38612.98	32.92 AV	54	-21.08	-67.26	4.92	-62.34

Note: Margin value = Emission Level - Limit value

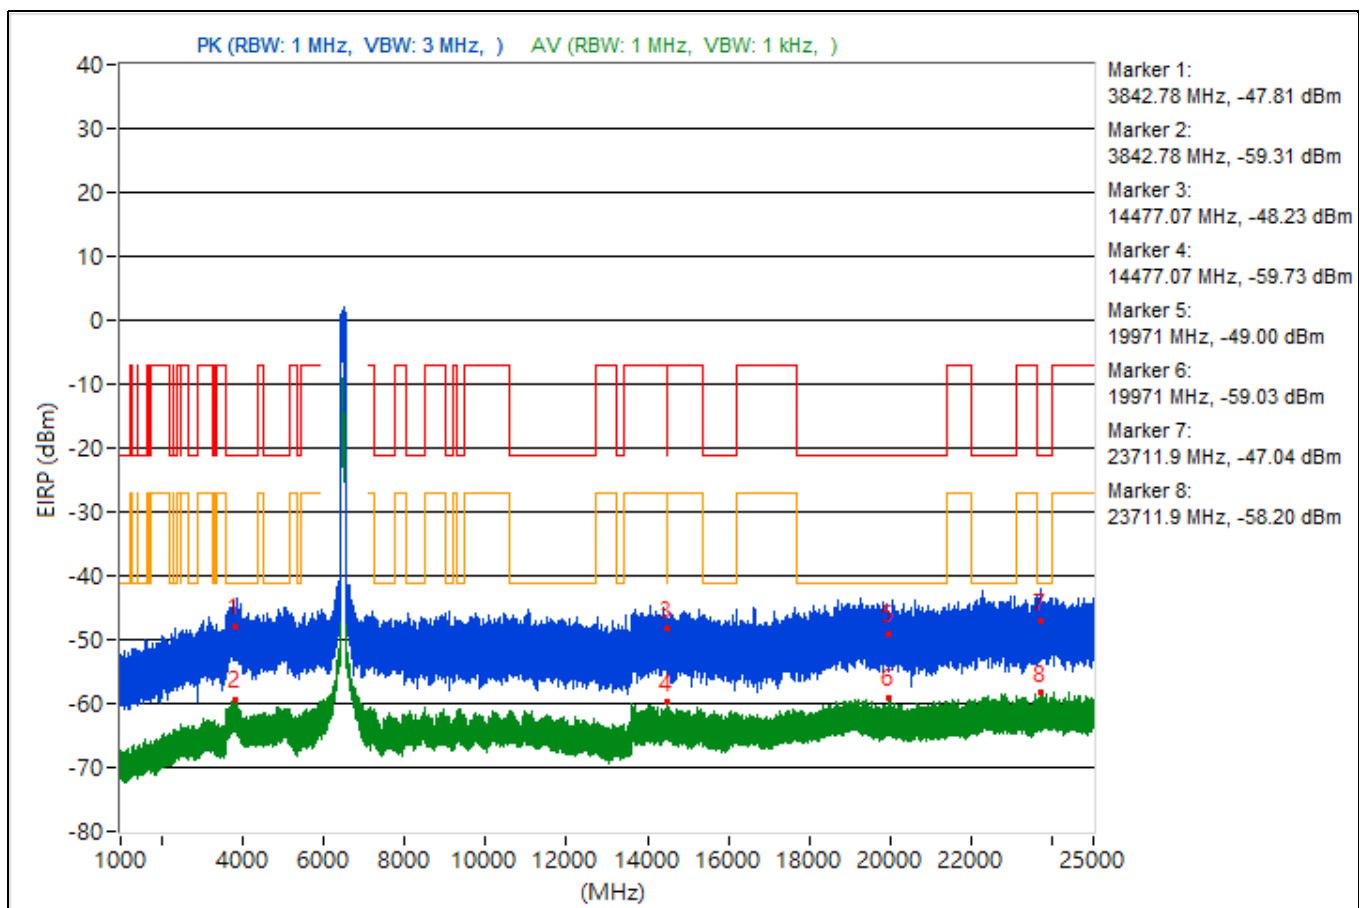


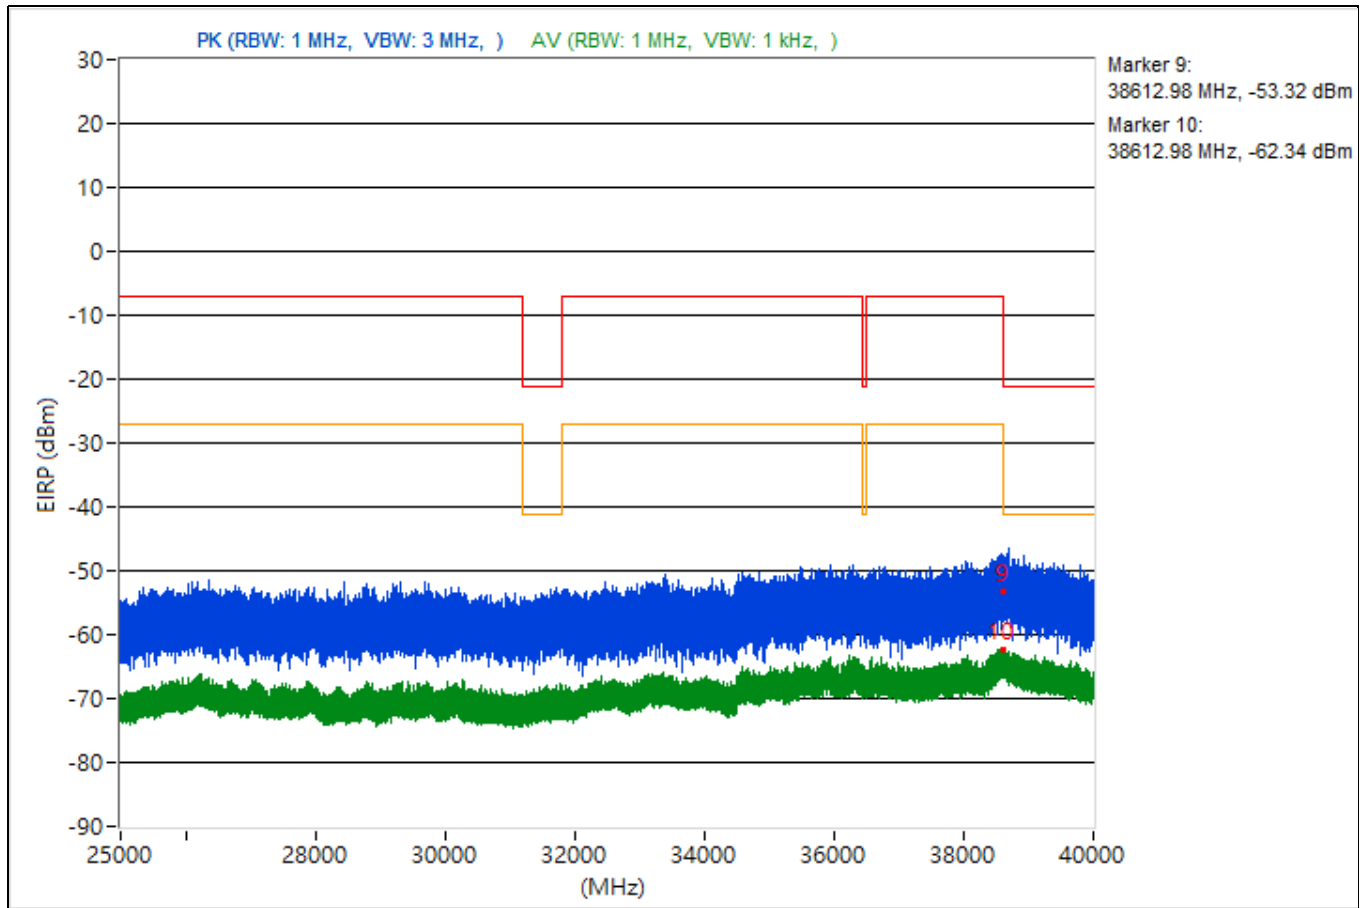


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3829.09	48.93 PK	74	-25.07	-51.25	4.92	-46.33
2	3829.09	35.81 AV	54	-18.19	-64.37	4.92	-59.45
3	14471.2	44.13 PK	74	-29.87	-56.05	4.92	-51.13
4	14471.2	34.55 AV	54	-19.45	-65.63	4.92	-60.71
5	19062.5	49.14 PK	74	-24.86	-51.04	4.92	-46.12
6	19062.5	36.11 AV	54	-17.89	-64.07	4.92	-59.15
7	23661	43.31 PK	74	-30.69	-56.87	4.92	-51.95
8	23661	36.74 AV	54	-17.26	-63.44	4.92	-58.52
9	38639.02	45.96 PK	74	-28.04	-54.22	4.92	-49.3
10	38639.02	33.17 AV	54	-20.83	-67.01	4.92	-62.09

Note: Margin value = Emission Level - Limit value

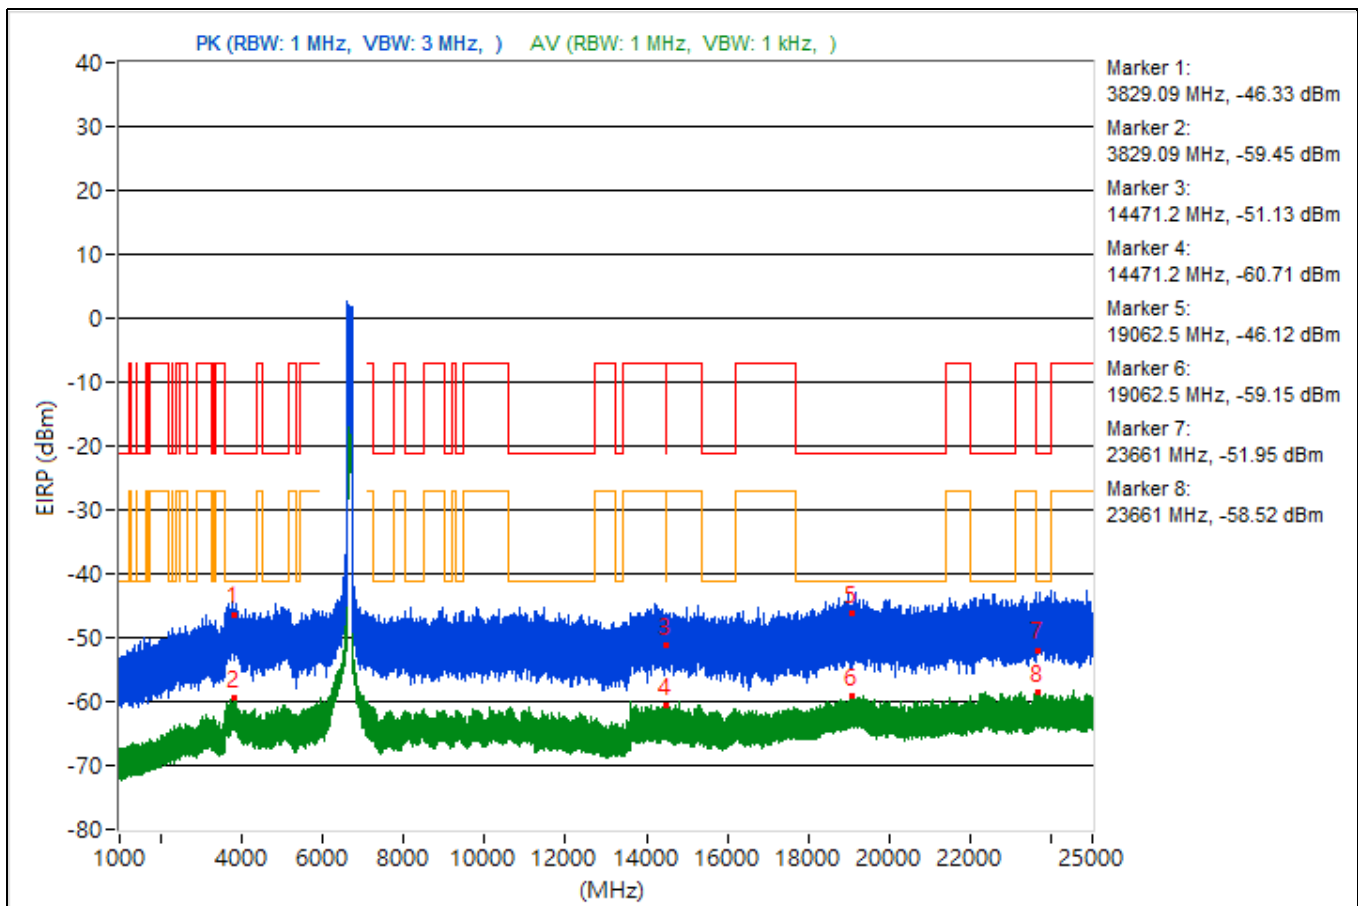


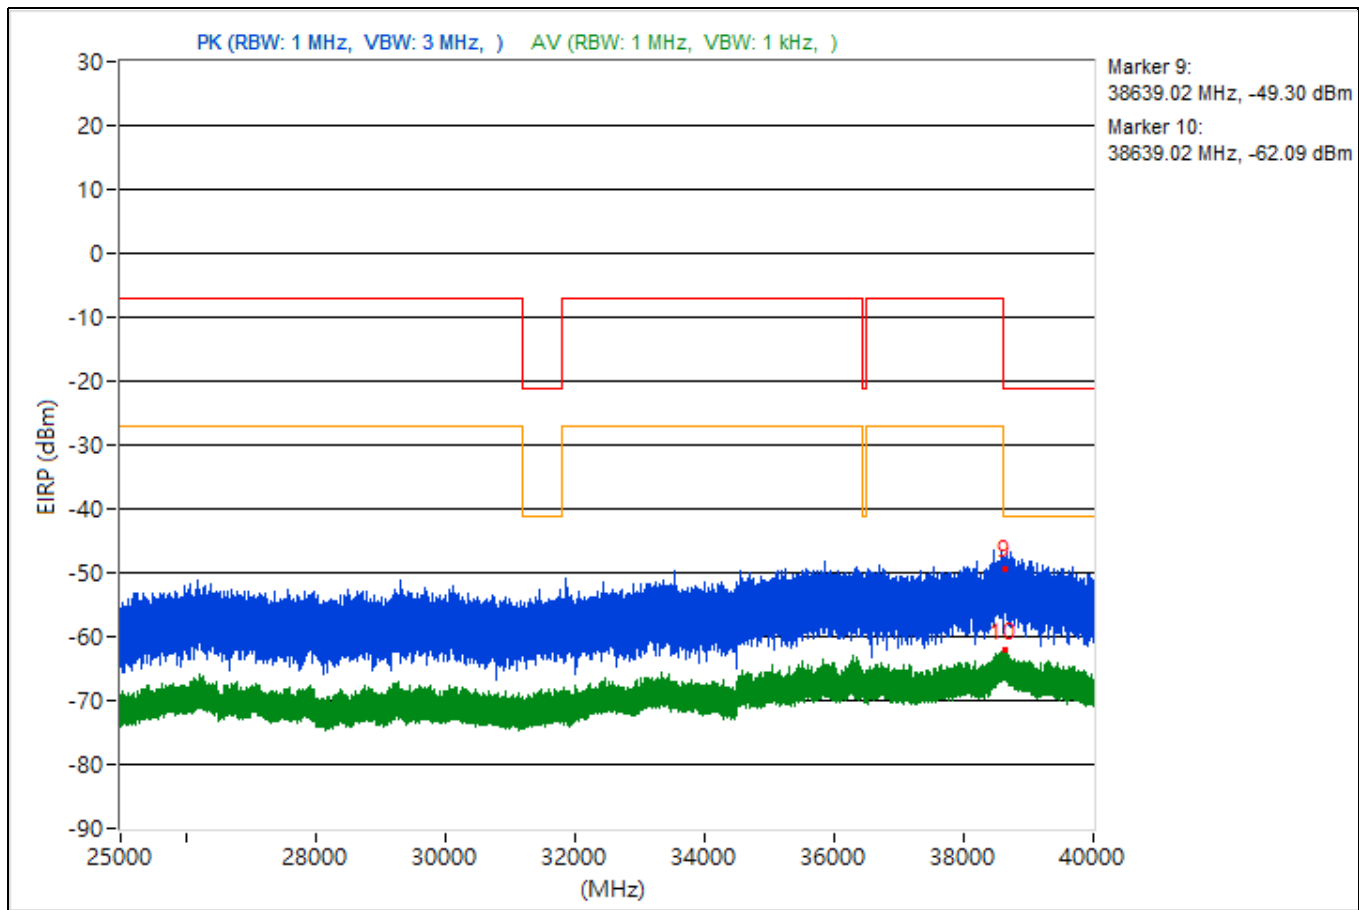


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3805.21	47.66 PK	74	-26.34	-52.52	4.92	-47.6
2	3805.21	35.26 AV	54	-18.74	-64.92	4.92	-60
3	14473.69	44.48 PK	74	-29.52	-55.7	4.92	-50.78
4	14473.69	34.87 AV	54	-19.13	-65.31	4.92	-60.39
5	18987.3	43.31 PK	74	-30.69	-56.87	4.92	-51.95
6	18987.3	37.06 AV	54	-16.94	-63.12	4.92	-58.2
7	23717.9	46.3 PK	74	-27.7	-53.88	4.92	-48.96
8	23717.9	37.11 AV	54	-16.89	-63.07	4.92	-58.15
9	38626.93	42.1 PK	74	-31.9	-58.08	4.92	-53.16
10	38626.93	33.52 AV	54	-20.48	-66.66	4.92	-61.74

Note: Margin value = Emission Level - Limit value

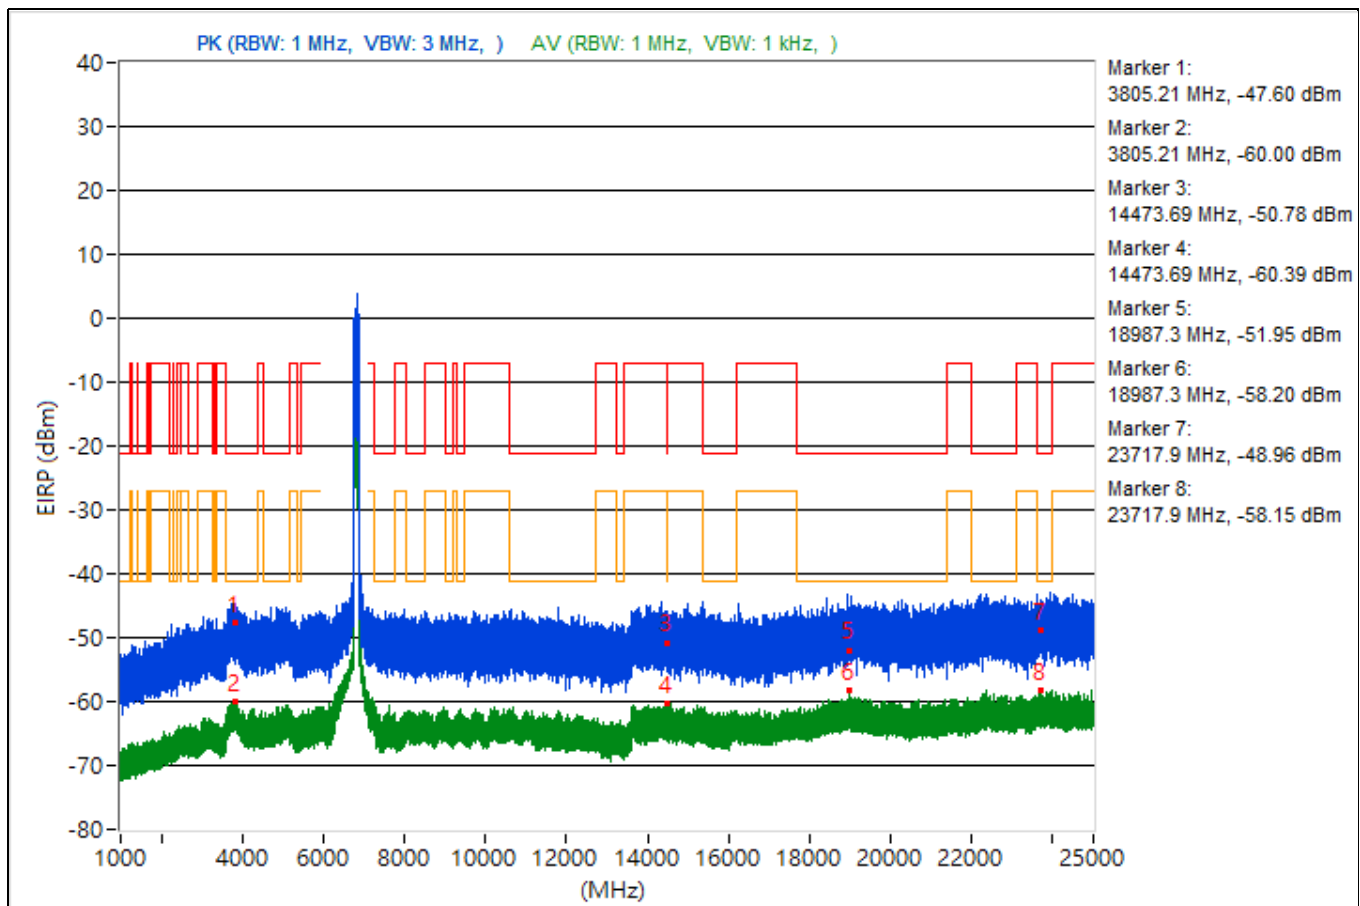


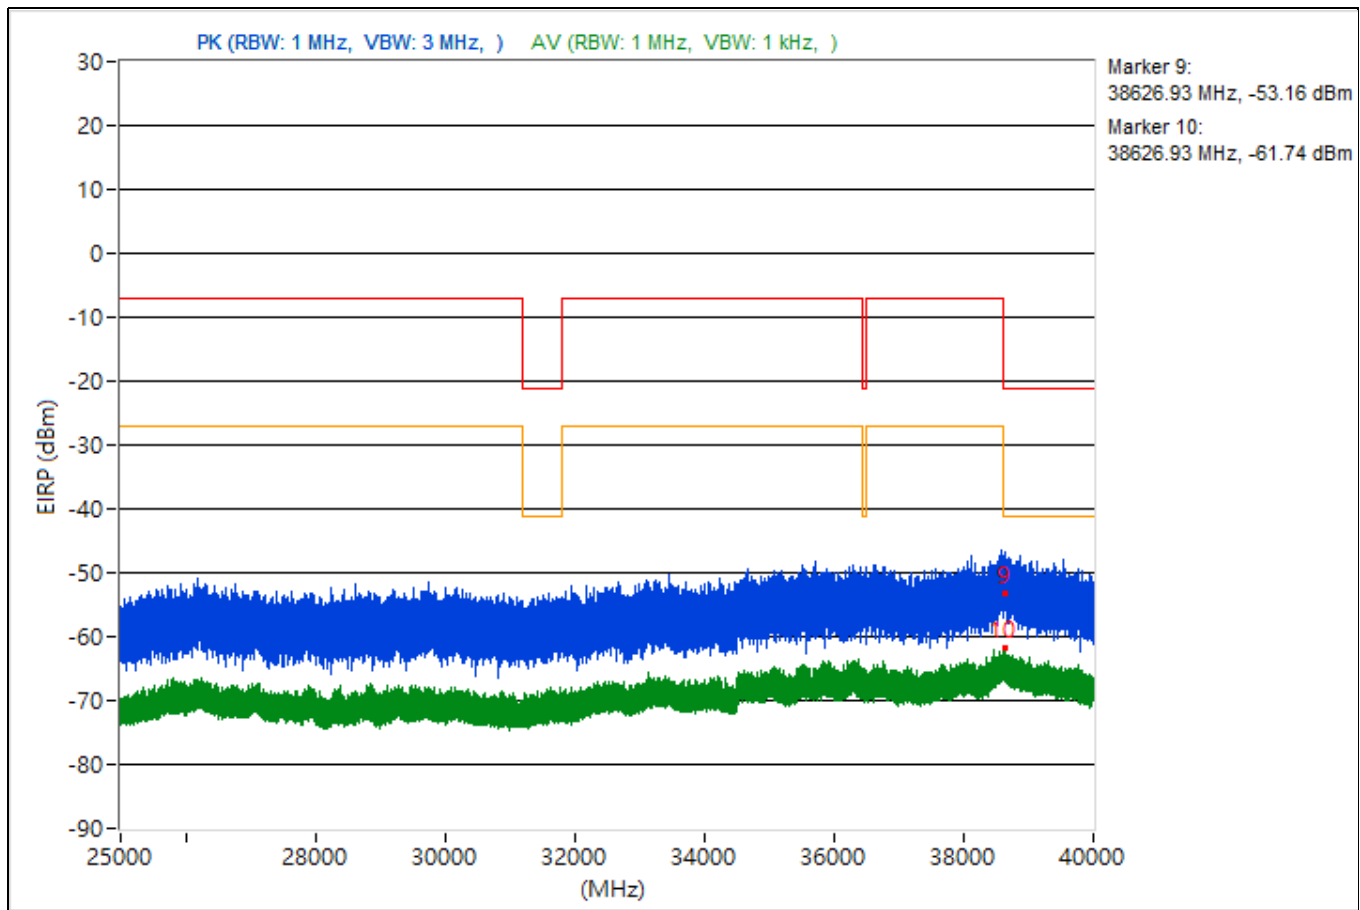


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3785.07	46.63 PK	74	-27.37	-53.55	4.92	-48.63
2	3785.07	35.39 AV	54	-18.61	-64.79	4.92	-59.87
3	7251	44.54 PK	74	-29.46	-55.64	4.92	-50.72
4	7251	36.3 AV	54	-17.7	-63.88	4.92	-58.96
5	19112.9	43.97 PK	74	-30.03	-56.21	4.92	-51.29
6	19112.9	36.06 AV	54	-17.94	-64.12	4.92	-59.2
7	23612.9	48.47 PK	74	-25.53	-51.71	4.92	-46.79
8	23612.9	36.96 AV	54	-17.04	-63.22	4.92	-58.3
9	38633.42	42.82 PK	74	-31.18	-57.36	4.92	-52.44
10	38633.42	32.73 AV	54	-21.27	-67.45	4.92	-62.53

Note: Margin value = Emission Level - Limit value

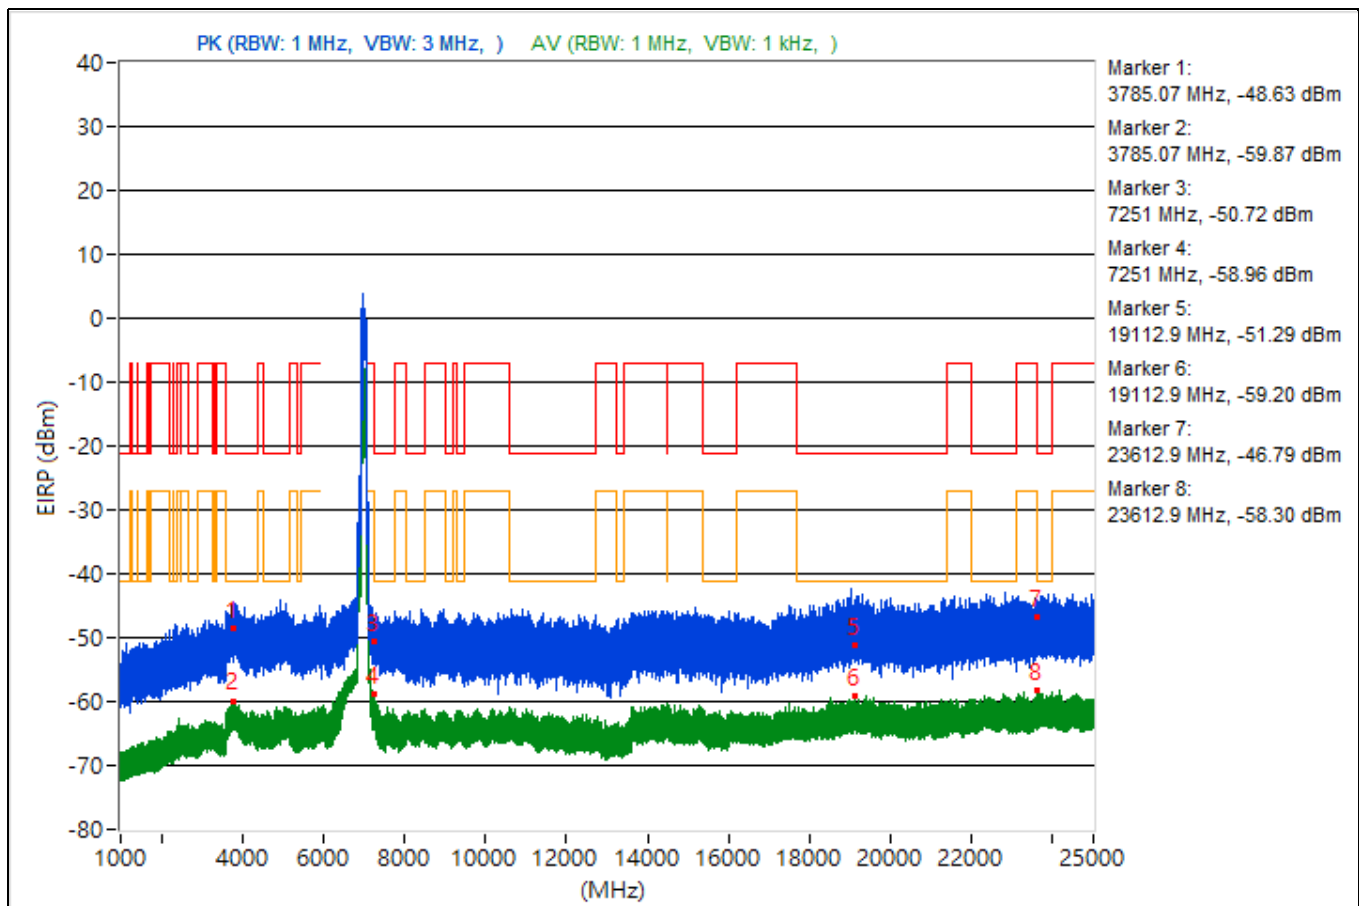

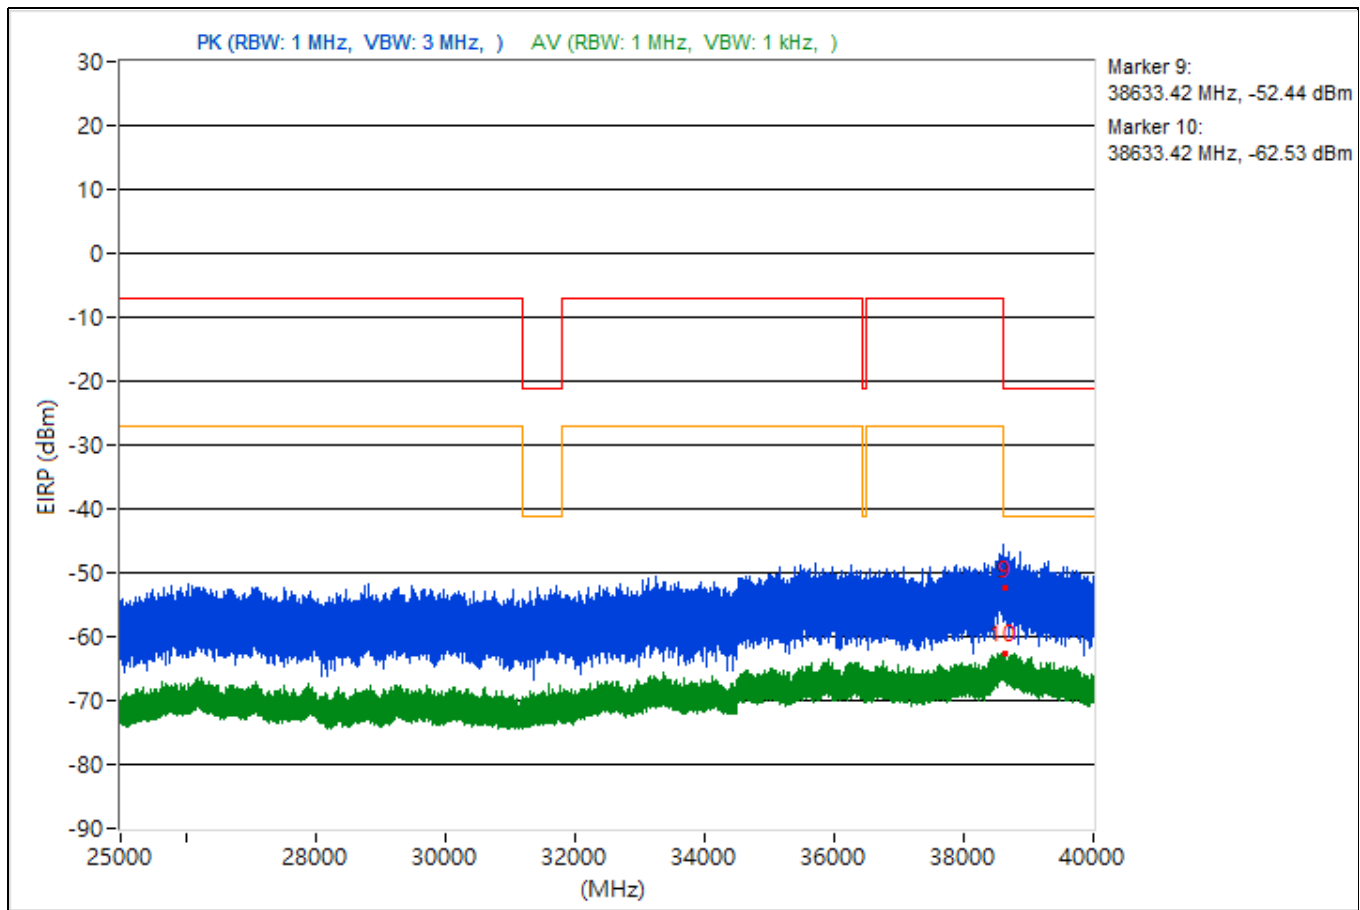


Conducted Band Edges

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5935.8	97.95 PK			-2.07	4.76	2.69
2	*5935.8	89.9 AV			-10.12	4.76	-5.36
3	#5924.98	67.39 PK	88.26	-20.87	-32.63	4.76	-27.87
4	#5924.98	48.09 AV	68.26	-20.17	-51.93	4.76	-47.17

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

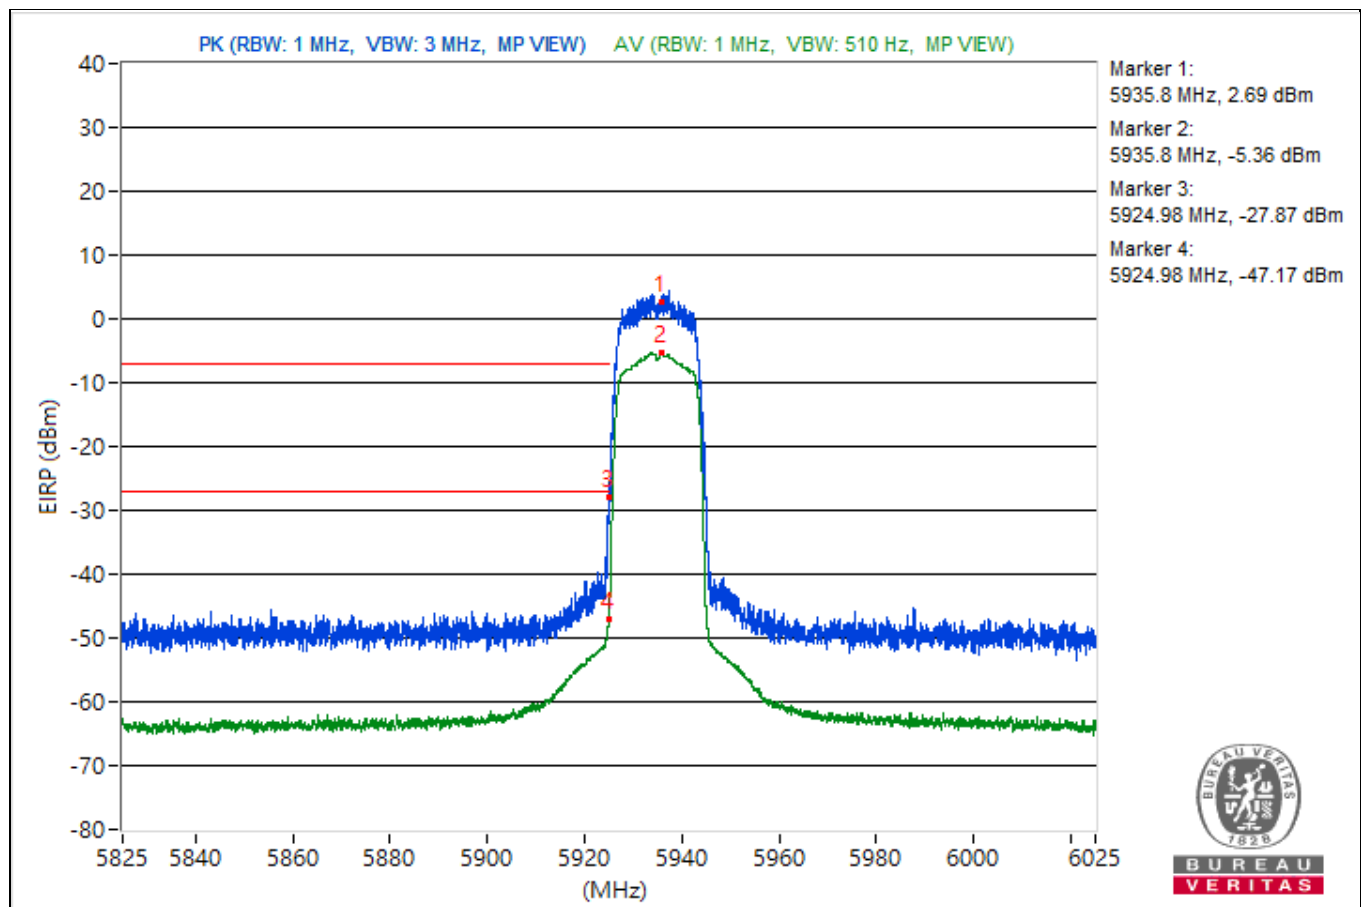


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	1

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5955.77	99.71 PK			-0.31	4.76	4.45
2	*5955.77	91.7 AV			-8.32	4.76	-3.56
3	#5901.12	56.74 PK	88.26	-31.52	-43.28	4.76	-38.52
4	#5901.12	48.54 AV	68.26	-19.72	-51.48	4.76	-46.72

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

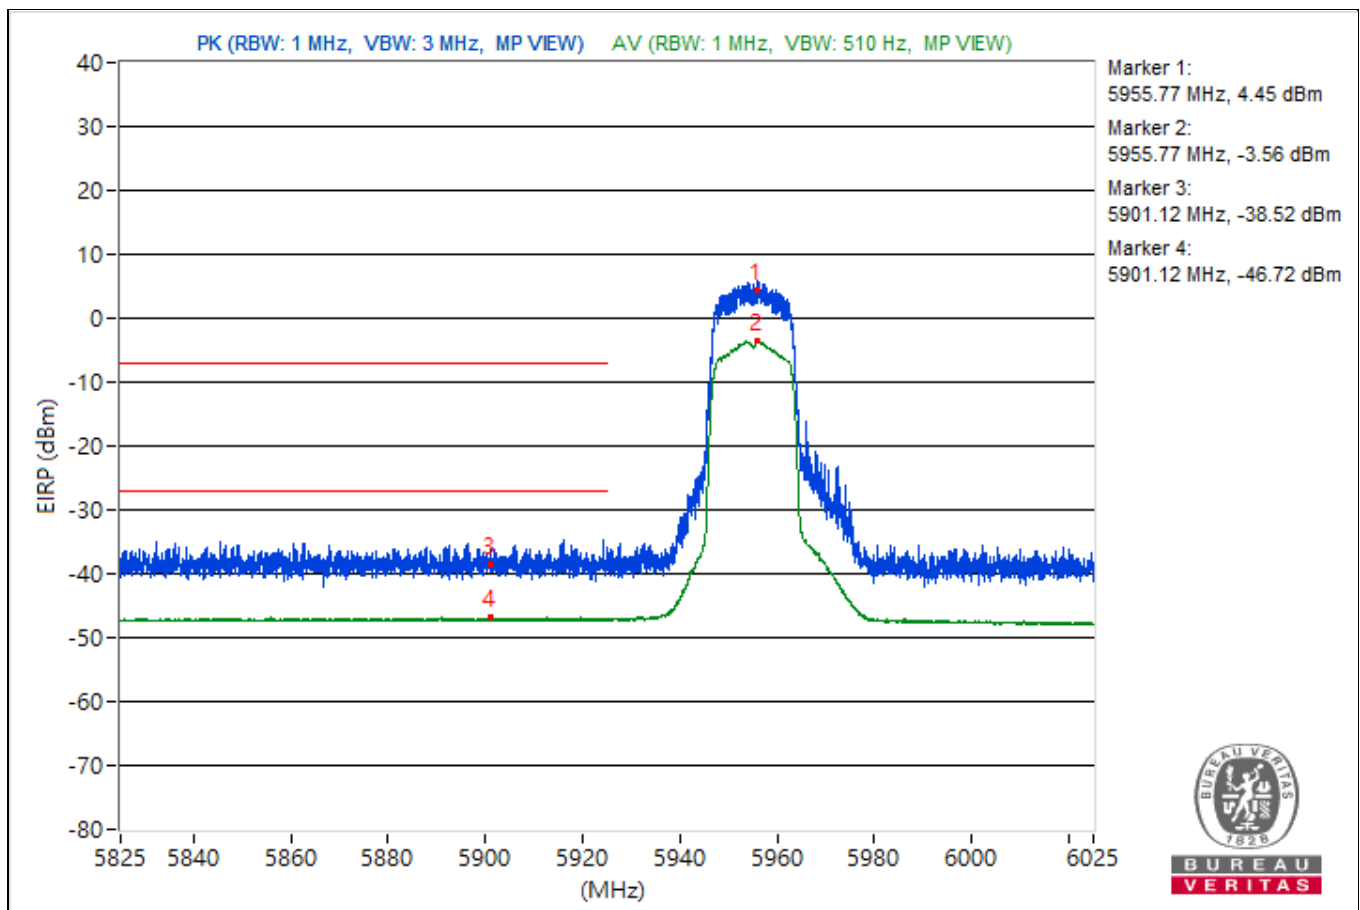


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	1

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7113.75	99.82 PK			0.47	4.09	4.56
2	*7113.75	93.24 AV			-6.11	4.09	-2.02
3	#7125	66.79 PK	88.26	-21.47	-32.56	4.09	-28.47
4	#7125	54.35 AV	68.26	-13.91	-45	4.09	-40.91

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

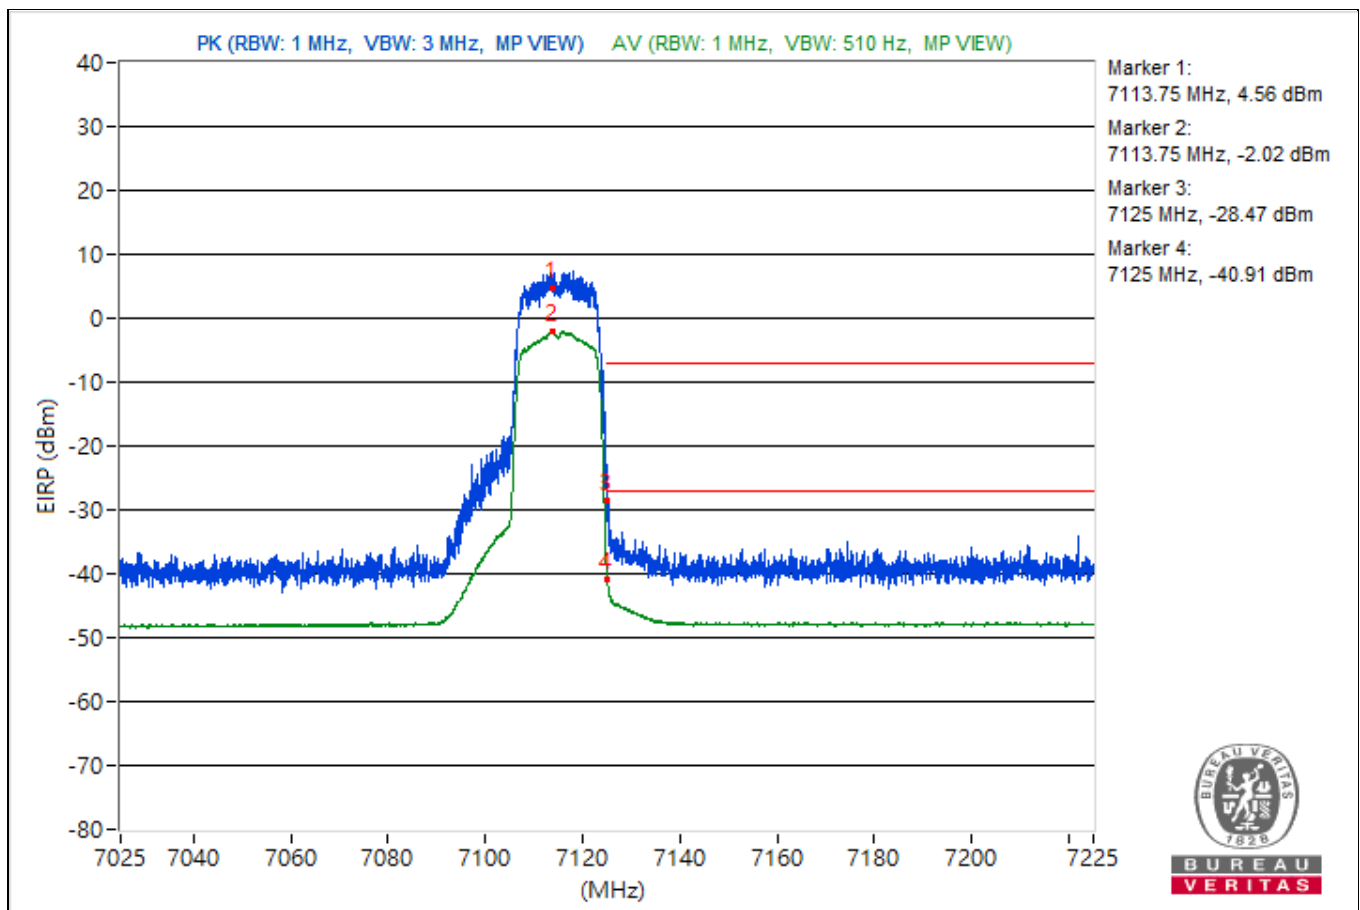


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	20°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5935.82	88.14 PK			-11.88	4.76	-7.12
2	*5935.82	80.91 AV			-19.11	4.76	-14.35
3	#5924.98	77.45 PK	88.26	-10.81	-22.57	4.76	-17.81
4	#5924.98	67.84 AV	68.26	-0.42	-32.18	4.76	-27.42

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

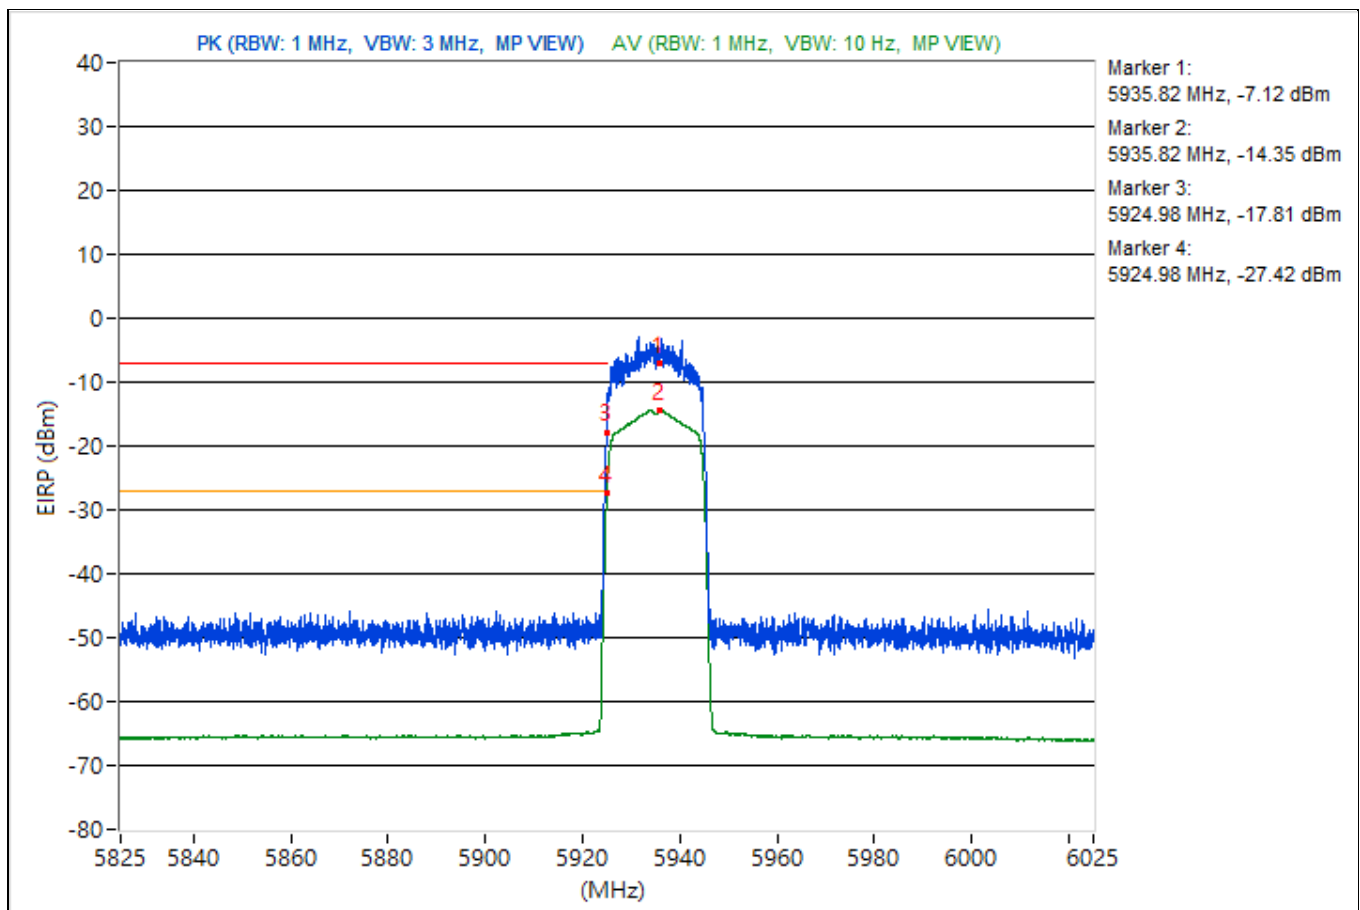


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	1

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5954.18	99.92 PK			-0.1	4.76	4.66
2	*5954.18	90.79 AV			-9.23	4.76	-4.47
3	#5924.93	57.08 PK	88.26	-31.18	-42.94	4.76	-38.18
4	#5924.93	47.82 AV	68.26	-20.44	-52.2	4.76	-47.44

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

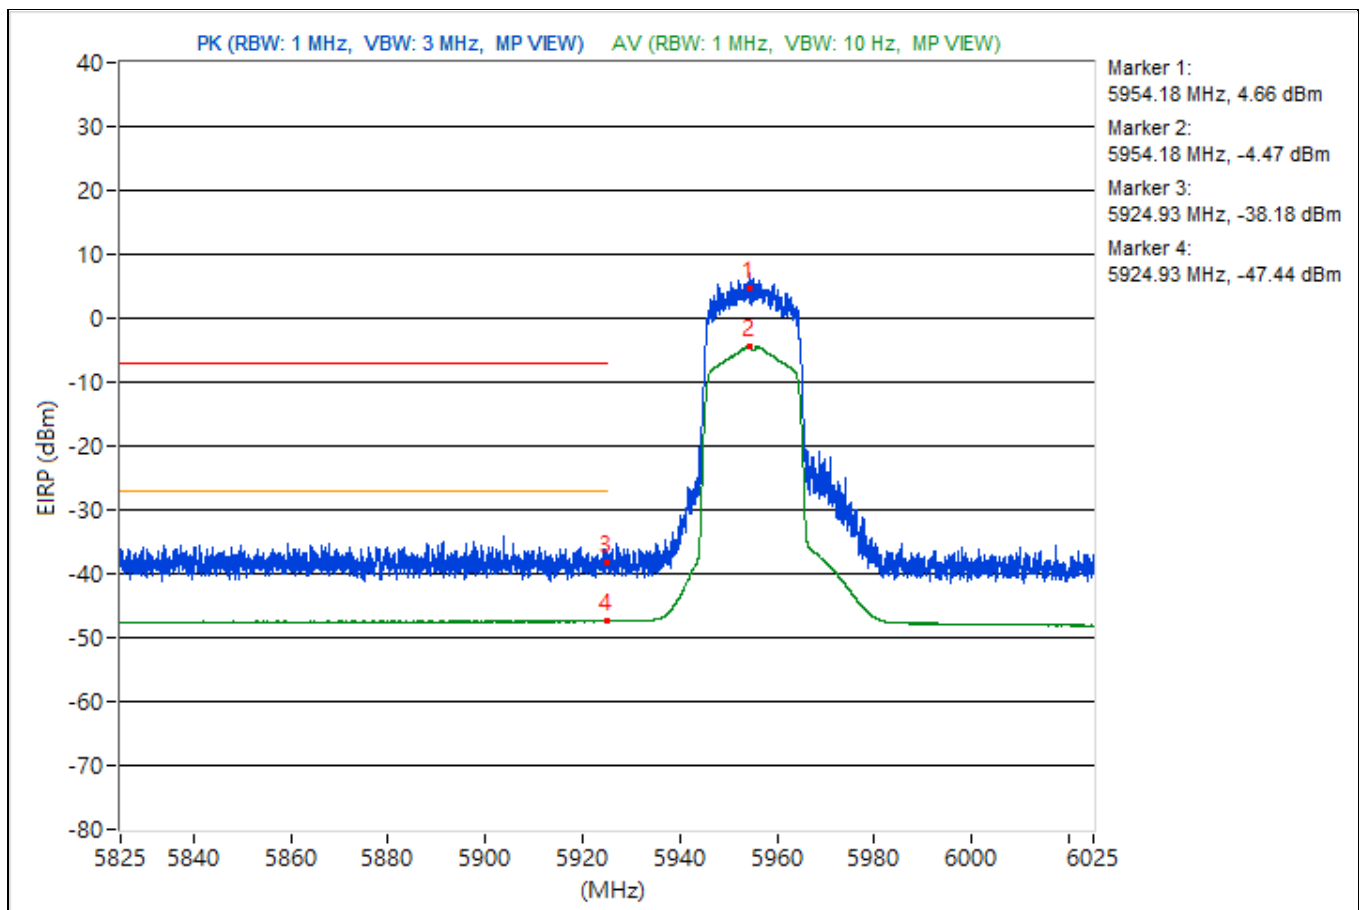


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	22°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7115.98	97.99 PK			-1.36	4.09	2.73
2	*7115.98	88.13 AV			-11.22	4.09	-7.13
3	#7125	85.57 PK	88.26	-2.69	-13.78	4.09	-9.69
4	!#7125	75.51 AV	68.26	7.25	-23.84	4.09	-19.75

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

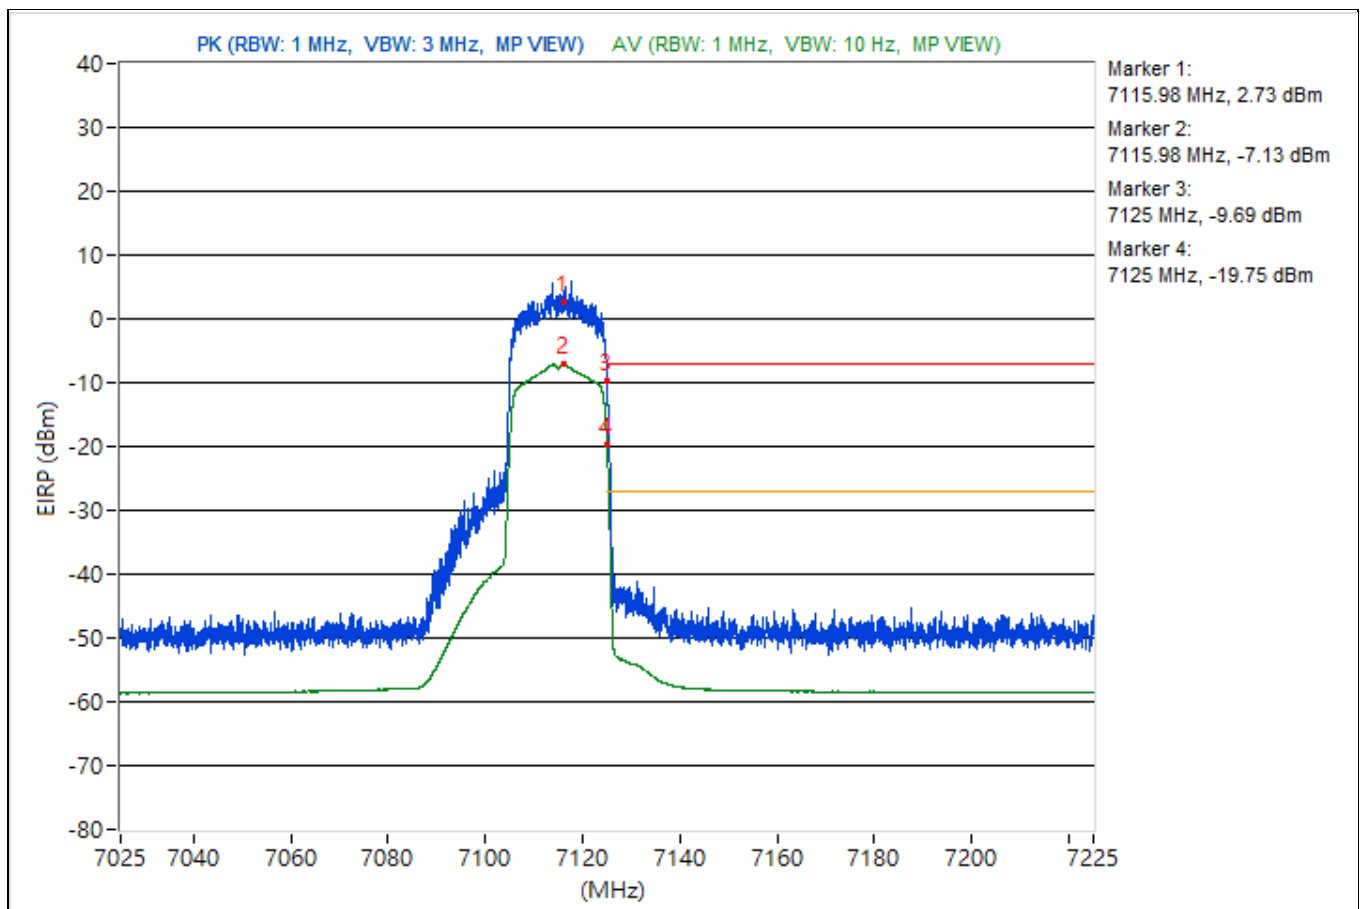


For Integration method:

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	46.08 AV	68.2	-22.12	-53.27	4.09	-49.18

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

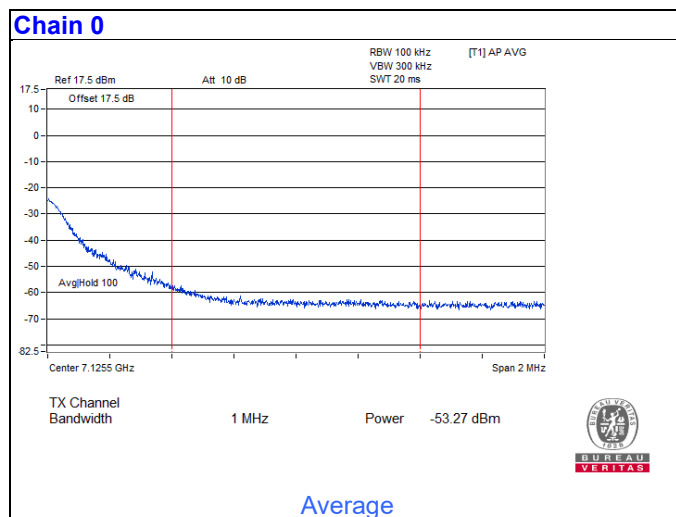


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5966.18	101.75 PK			1.73	4.76	6.49
2	*5966.18	91.05 AV			-8.97	4.76	-4.21
3	#5924.8	57.43 PK	88.26	-30.83	-42.59	4.76	-37.83
4	#5924.8	48.43 AV	68.26	-19.83	-51.59	4.76	-46.83

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

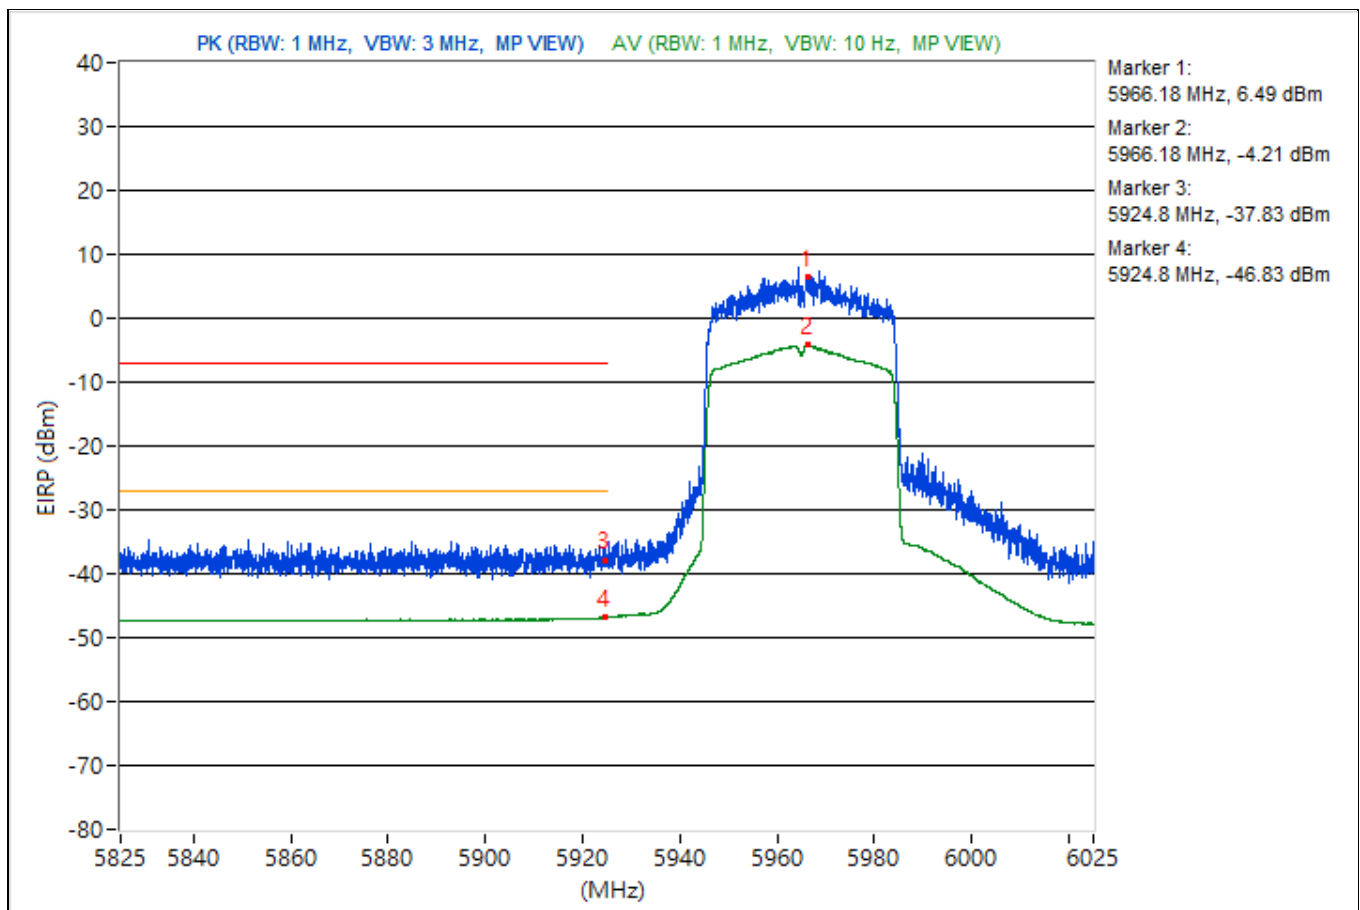


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7086.48	100.92 PK			1.57	4.09	5.66
2	*7086.48	92.76 AV			-6.59	4.09	-2.5
3	#7125.05	56.3 PK	88.26	-31.96	-43.05	4.09	-38.96
4	#7125.05	47.36 AV	68.26	-20.9	-51.99	4.09	-47.9

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

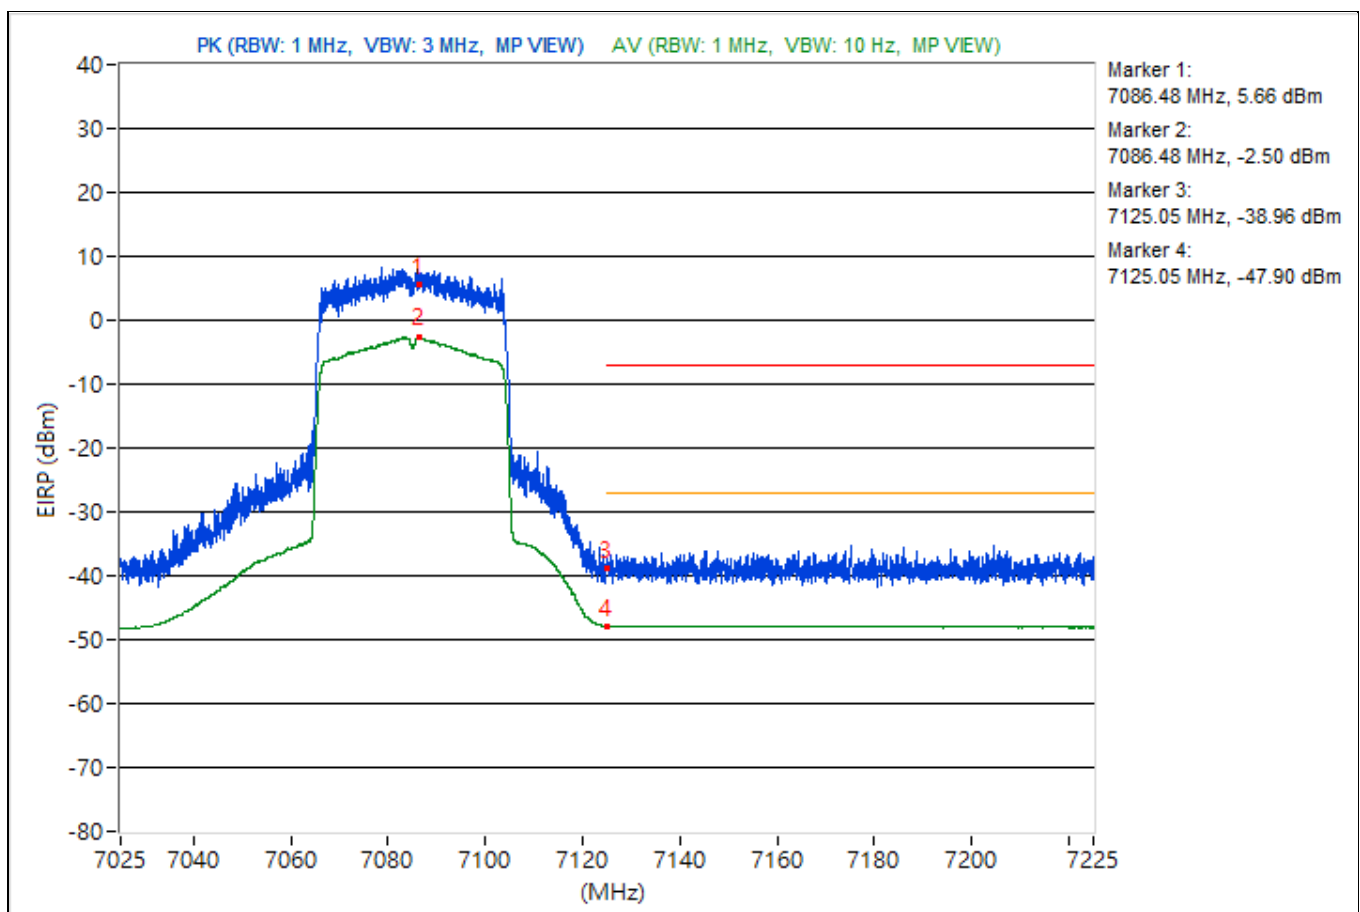


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5982.45	100.02 PK			0	4.76	4.76
2	*5982.45	92.26 AV			-7.76	4.76	-3
3	#5919.37	58.52 PK	88.26	-29.74	-41.5	4.76	-36.74
4	#5919.37	49.53 AV	68.26	-18.73	-50.49	4.76	-45.73

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

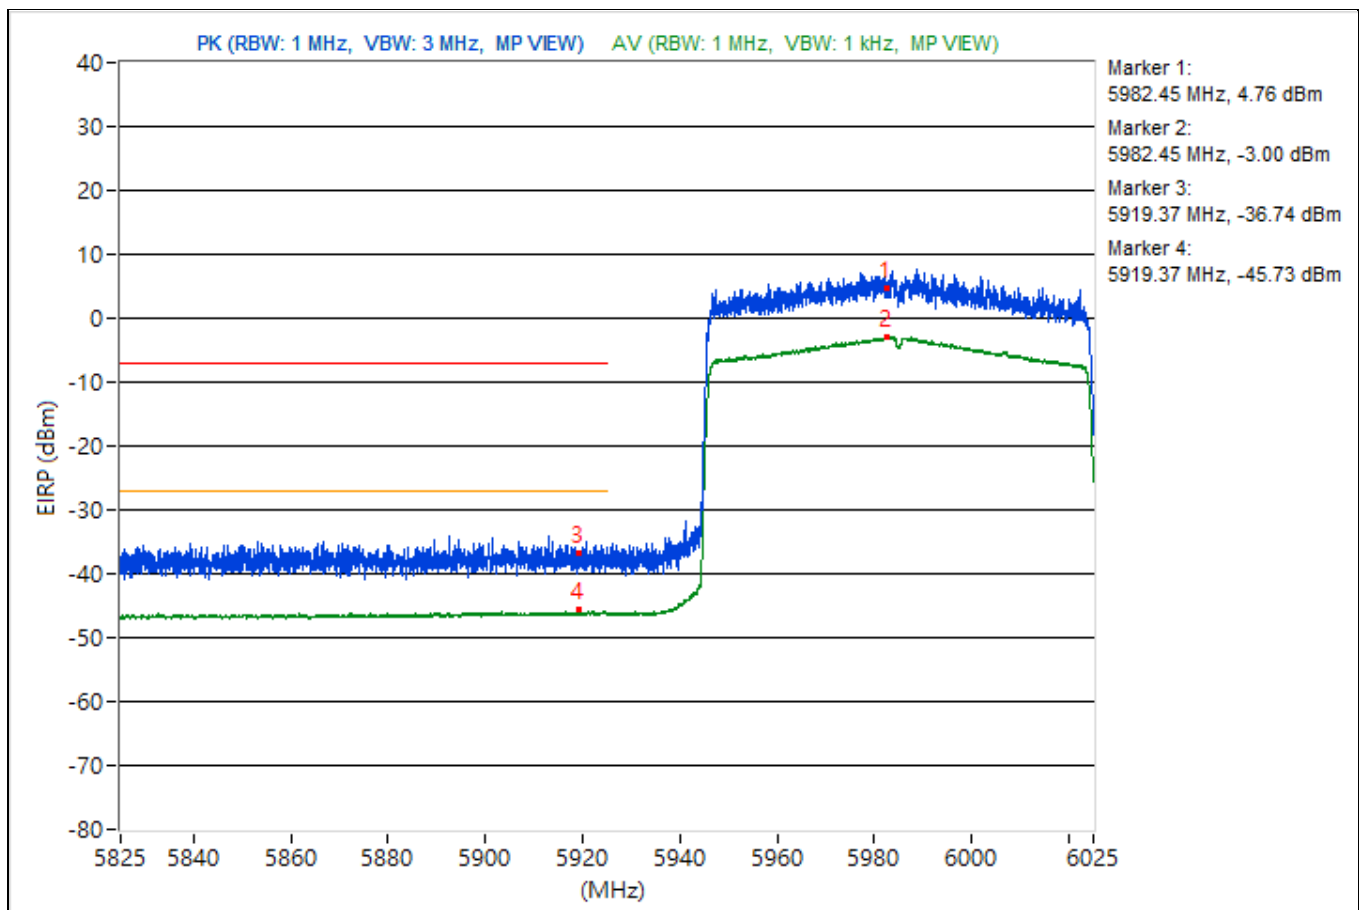


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7027.06	98.51 PK			-0.84	4.09	3.25
2	*7027.06	90.54 AV			-8.81	4.09	-4.72
3	#7129.62	54.88 PK	88.26	-33.38	-44.47	4.09	-40.38
4	#7129.62	43.78 AV	68.26	-24.48	-55.57	4.09	-51.48

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

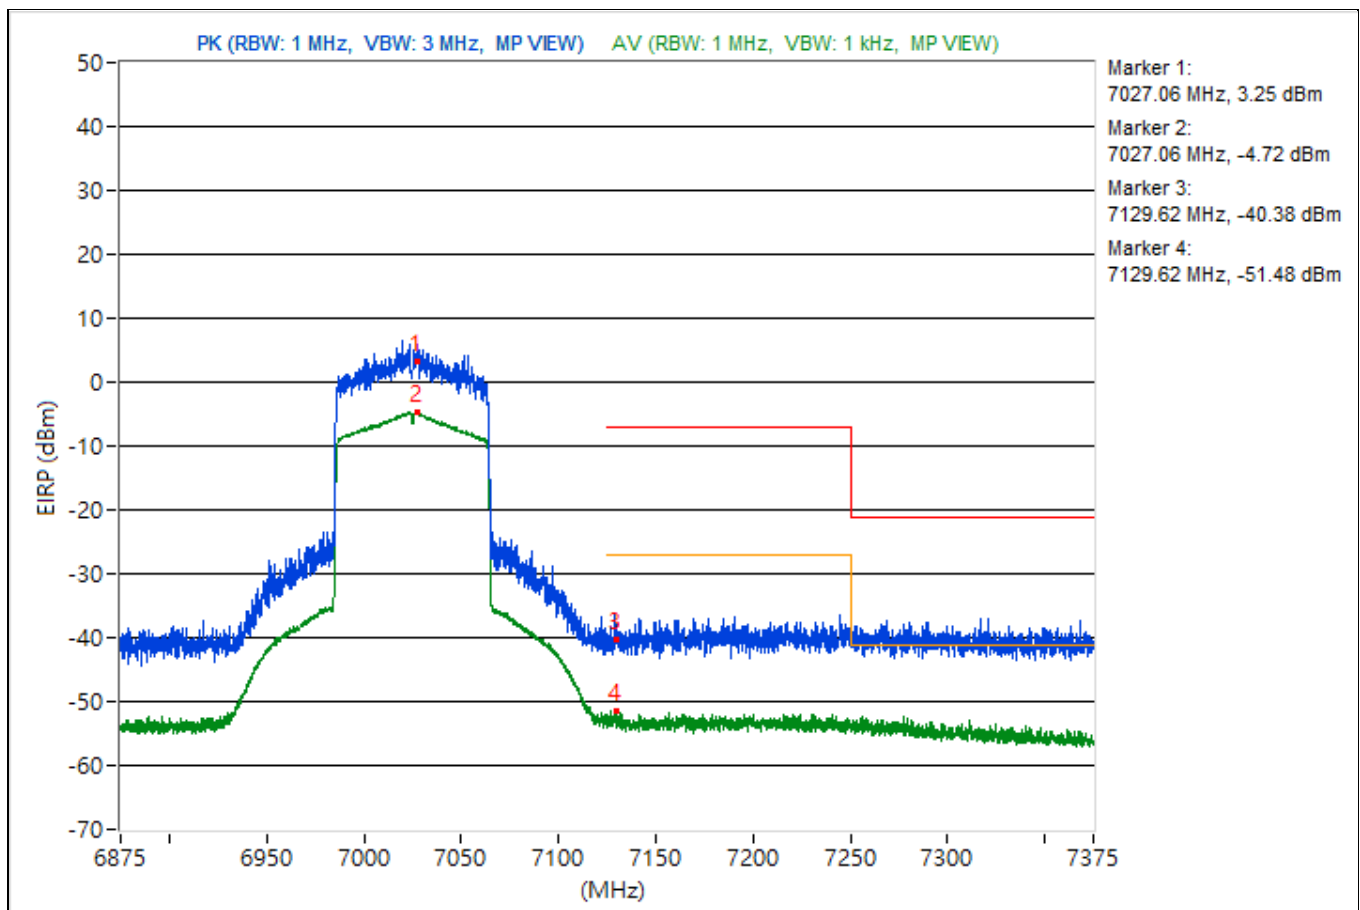


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6021.82	104.58 PK			4.56	4.76	9.32
2	*6021.82	96.04 AV			-3.98	4.76	0.78
3	#5922.37	60.77 PK	88.26	-27.49	-39.25	4.76	-34.49
4	#5922.37	51.38 AV	68.26	-16.88	-48.64	4.76	-43.88

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

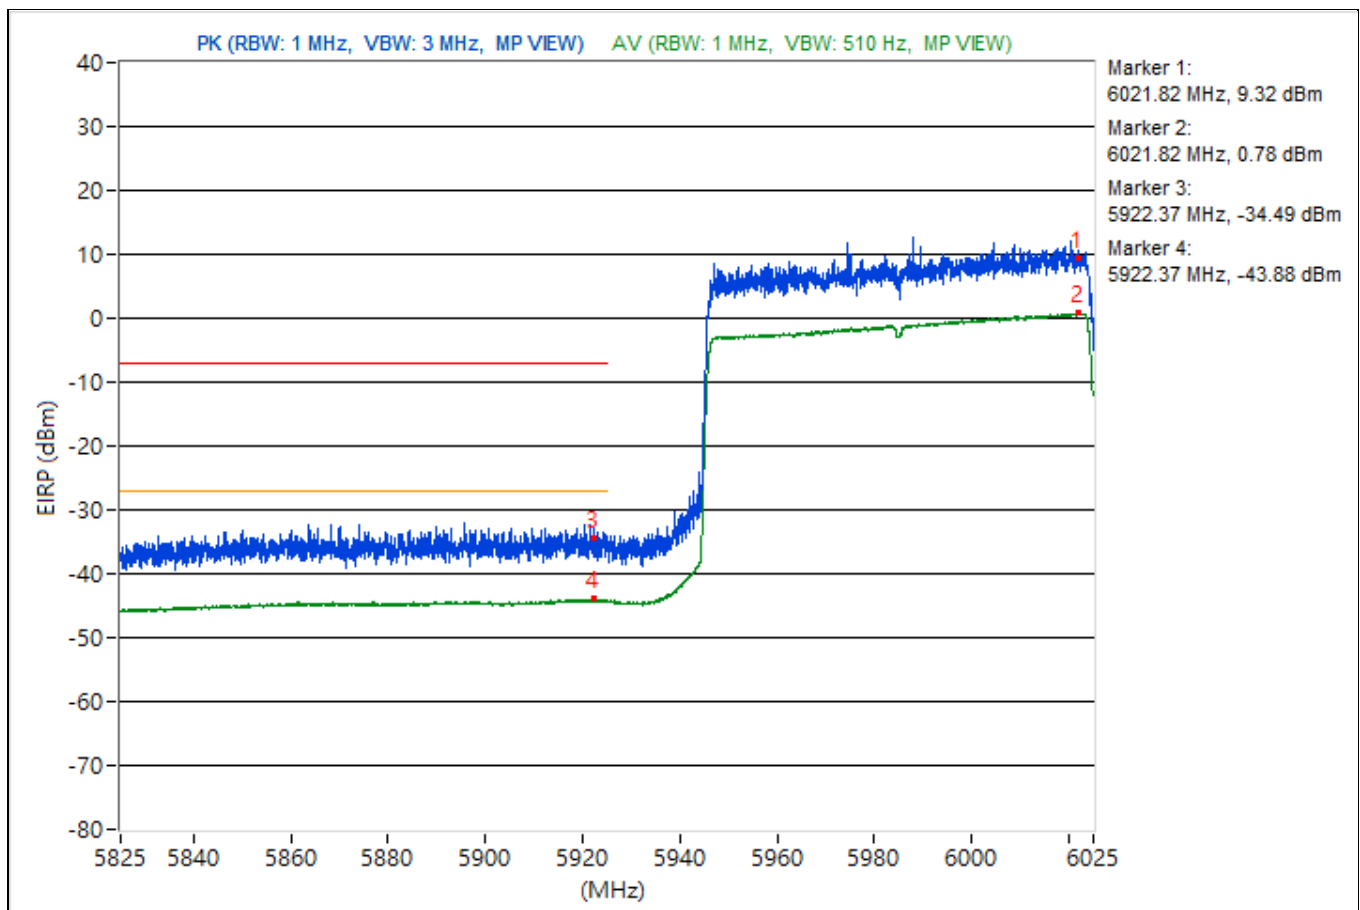


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	7.025 GHz ~ 7.225 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6987.81	97.09 PK			-2.26	4.09	1.83
2	*6987.81	88.86 AV			-10.49	4.09	-6.4
3	#7125.31	59.41 PK	88.26	-28.85	-39.94	4.09	-35.85
4	#7125.31	50.34 AV	68.26	-17.92	-49.01	4.09	-44.92

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

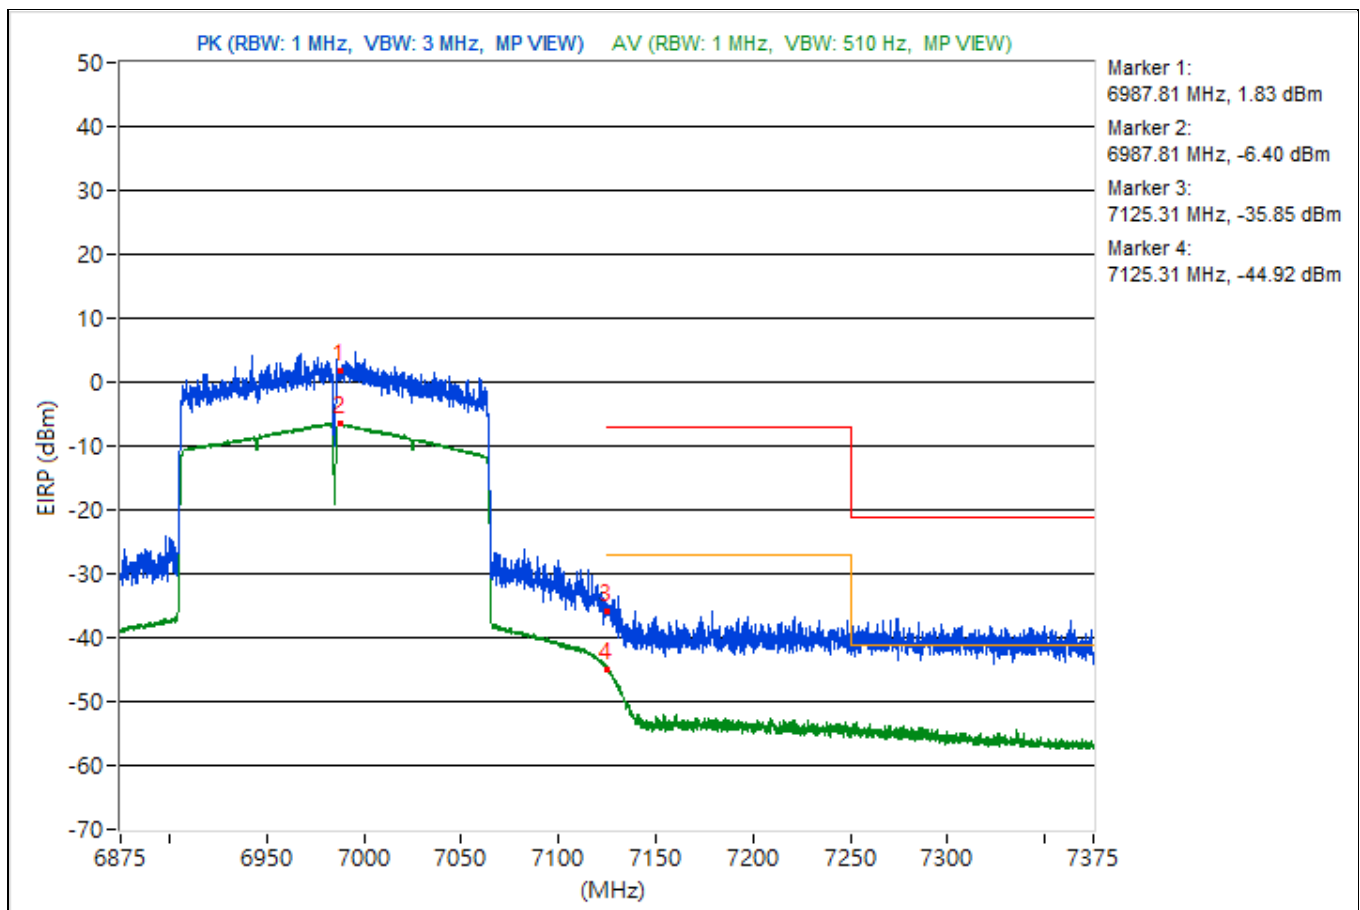


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5926.45	98.27 PK			-1.75	4.76	3.01
2	*5926.45	90.29 AV			-9.73	4.76	-4.97
3	#5924.98	87.95 PK	88.26	-0.31	-12.07	4.76	-7.31
4	!#5924.98	80.51 AV	68.26	12.25	-19.51	4.76	-14.75

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

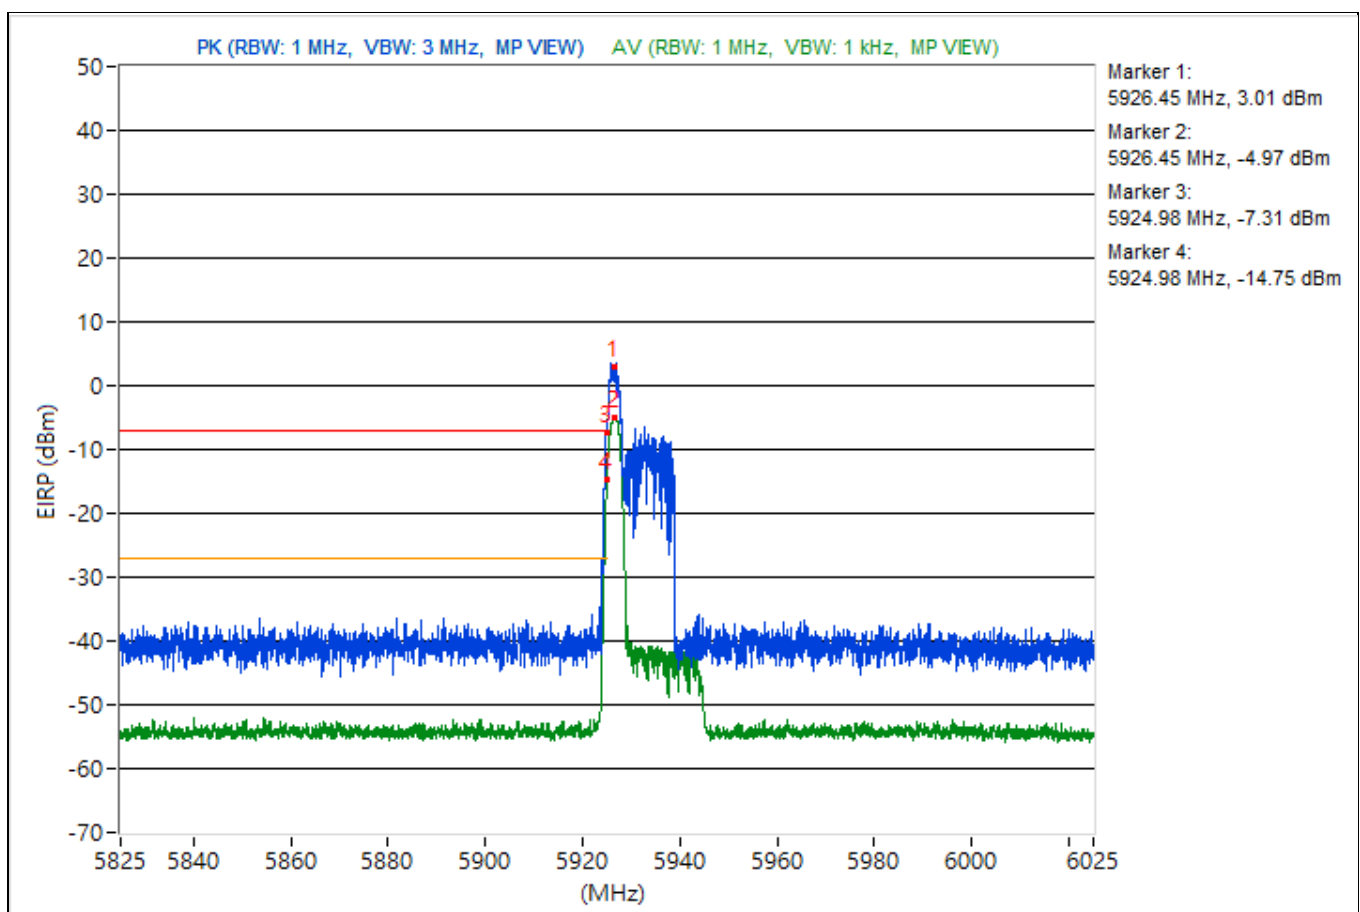


For Integration method:

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5935	57.99 AV	68.2	-10.21	-42.03	4.76	-37.27

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

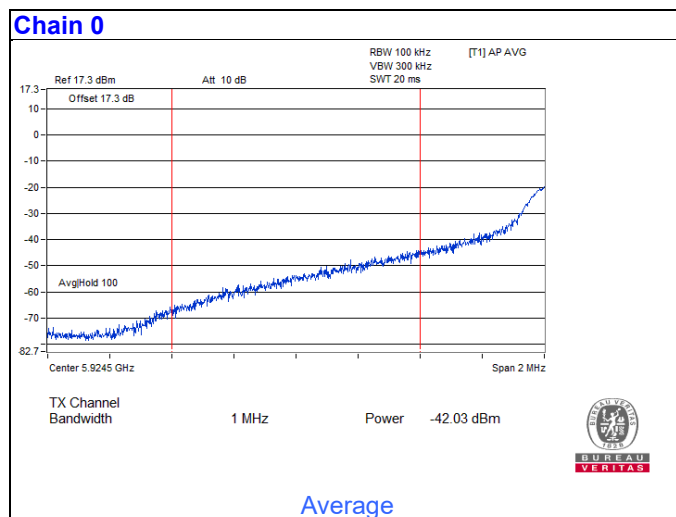


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5946.7	98.6 PK			-1.42	4.76	3.34
2	*5946.7	91.11 AV			-8.91	4.76	-4.15
3	#5911.4	45.49 PK	88.26	-42.77	-54.53	4.76	-49.77
4	#5911.4	34.71 AV	68.26	-33.55	-65.31	4.76	-60.55

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

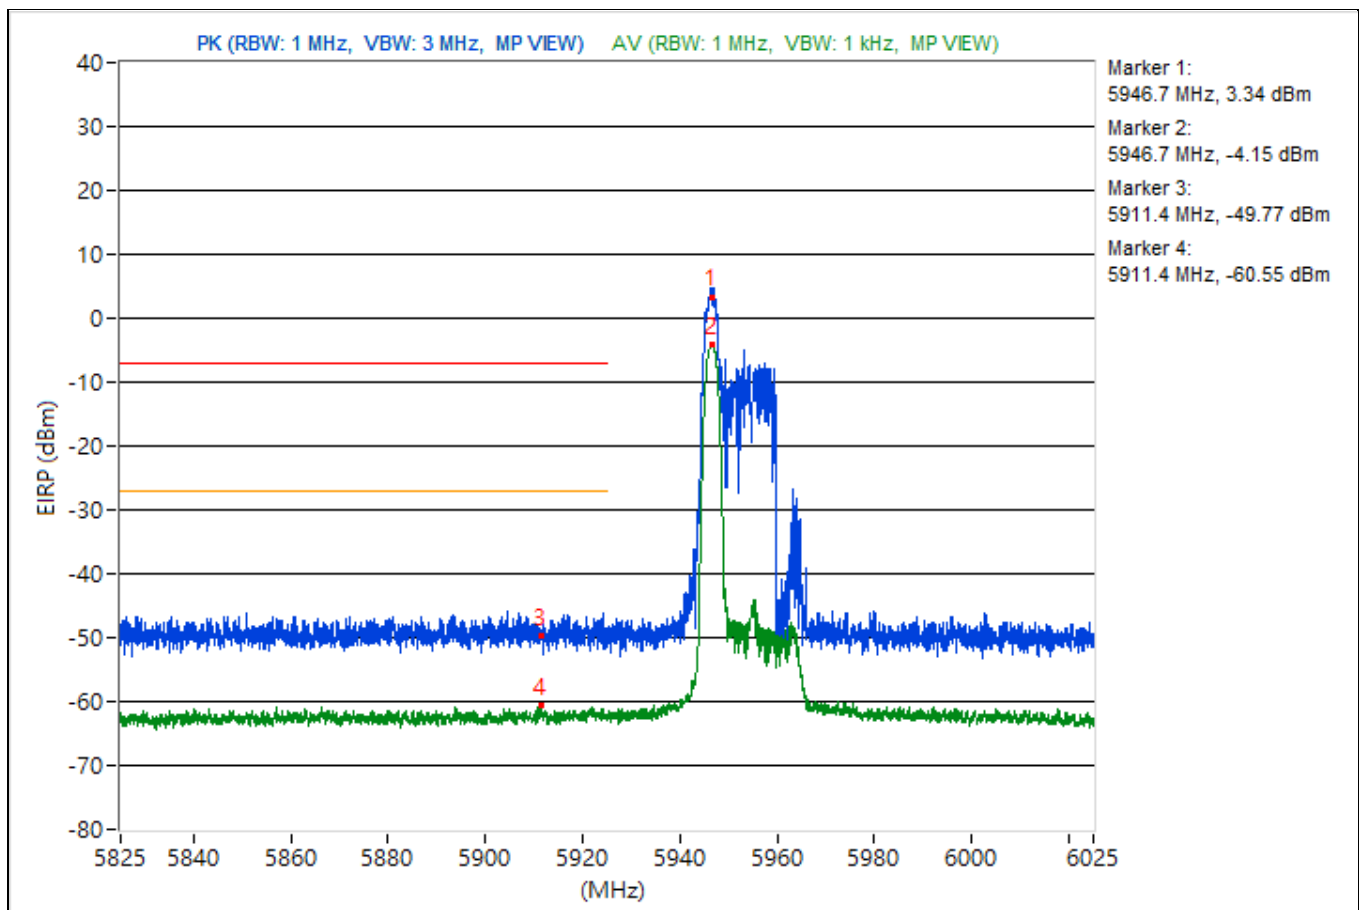


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7123.31	97.69 PK			-1.66	4.09	2.43
2	*7123.31	89.68 AV			-9.67	4.09	-5.58
3	#7125	87.86 PK	88.26	-0.4	-11.49	4.09	-7.4
4	!#7125	80.34 AV	68.26	12.08	-19.01	4.09	-14.92

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

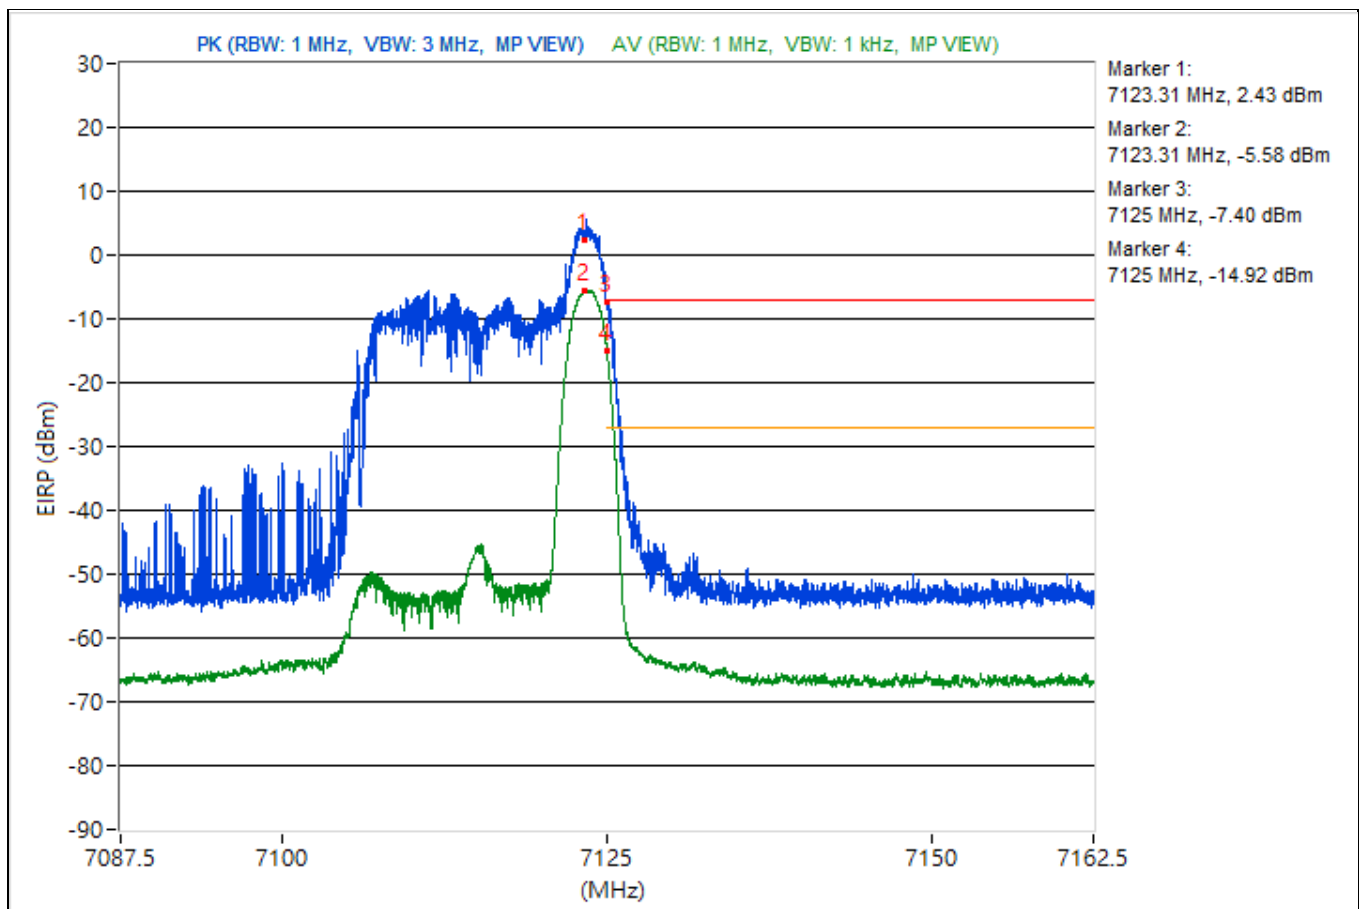


For Integration method:

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	55.69 AV	68.2	-12.51	-43.66	4.09	-39.57

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

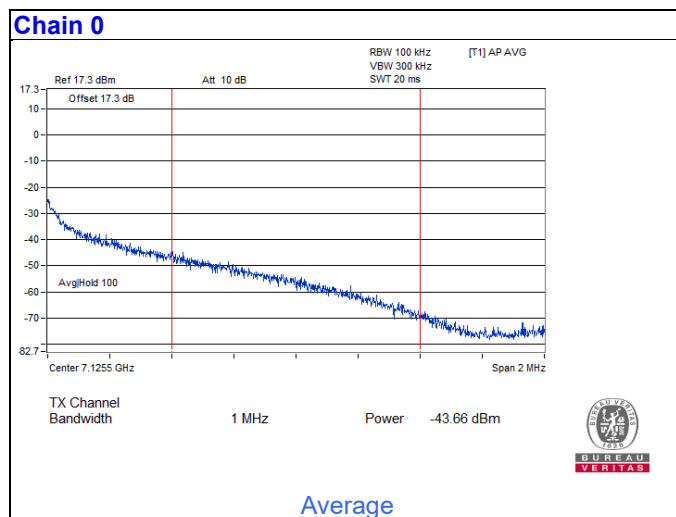


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5926.77	98.2 PK			-1.82	4.76	2.94
2	*5926.77	89.79 AV			-10.23	4.76	-5.47
3	#5924.98	87.49 PK	88.26	-0.77	-12.53	4.76	-7.77
4	!#5924.98	79.82 AV	68.26	11.56	-20.2	4.76	-15.44

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

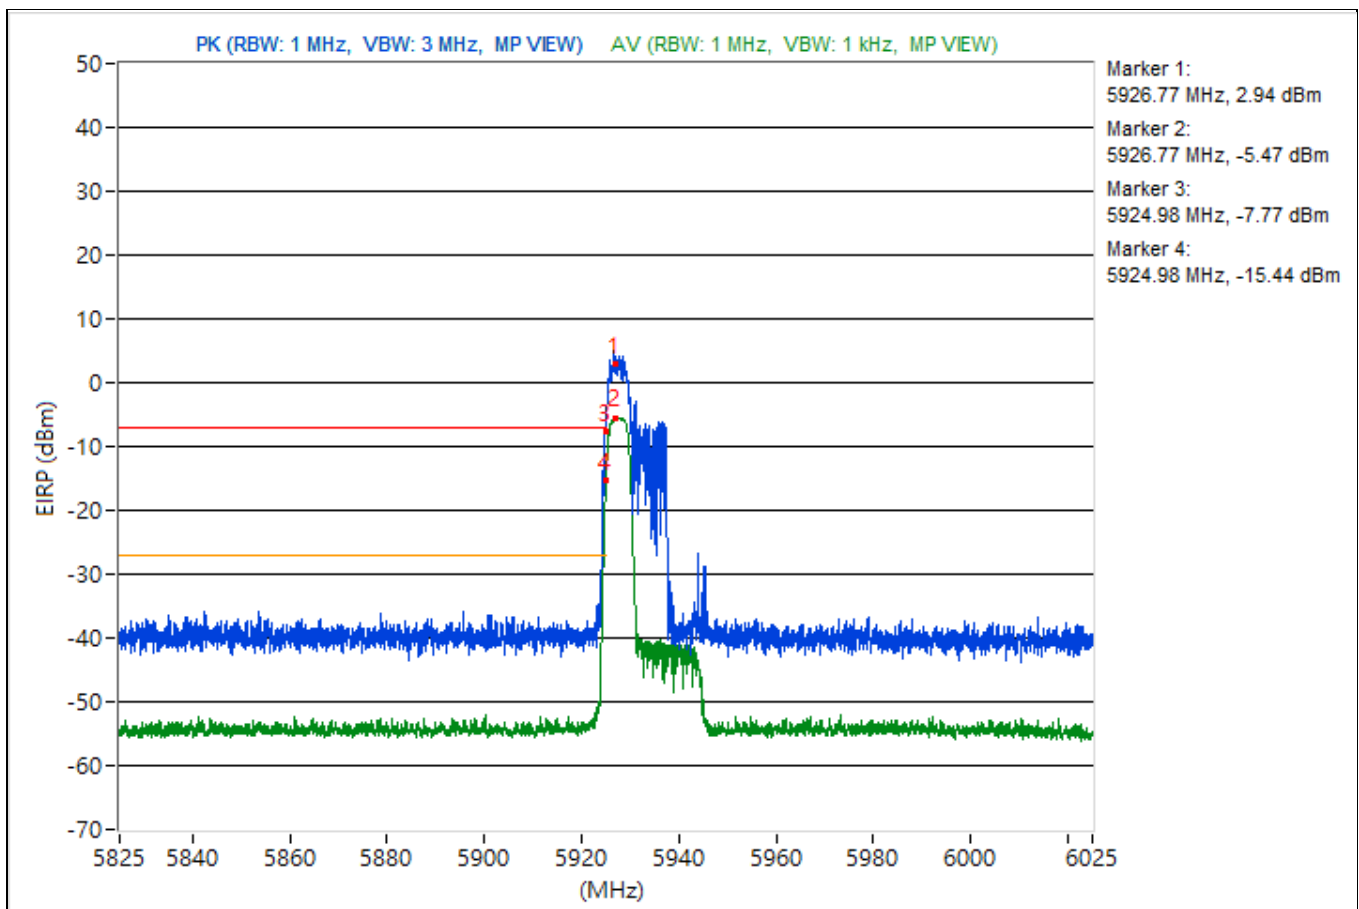


For Integration method:

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5935	57.51 AV	68.2	-10.69	-42.51	4.76	-37.75

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

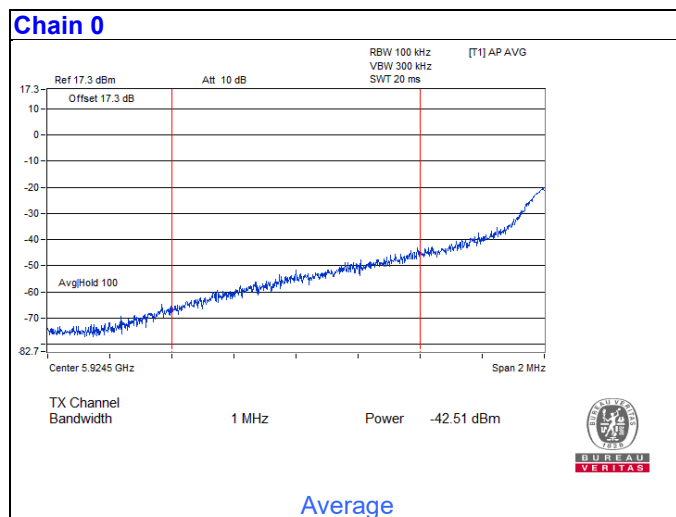


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5948.37	99.21 PK			-0.81	4.76	3.95
2	*5948.37	91.13 AV			-8.89	4.76	-4.13
3	#5881.25	46.04 PK	88.26	-42.22	-53.98	4.76	-49.22
4	#5881.25	34.53 AV	68.26	-33.73	-65.49	4.76	-60.73

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

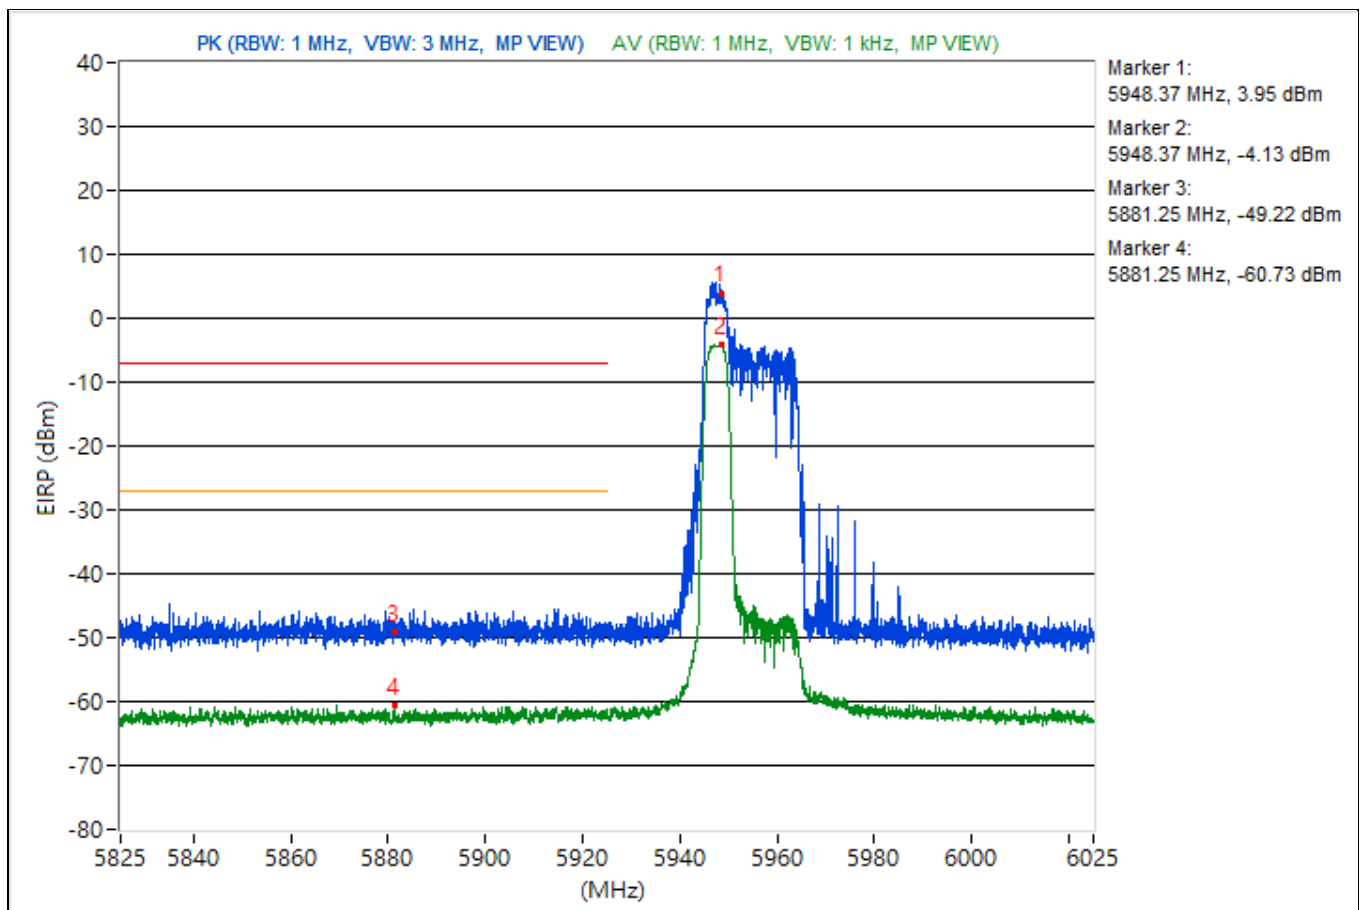


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7122.98	98.84 PK			-0.51	4.09	3.58
2	*7122.98	88.98 AV			-10.37	4.09	-6.28
3	#7125	88.19 PK	88.26	-0.07	-11.16	4.09	-7.07
4	!#7125	79.15 AV	68.26	10.89	-20.2	4.09	-16.11

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

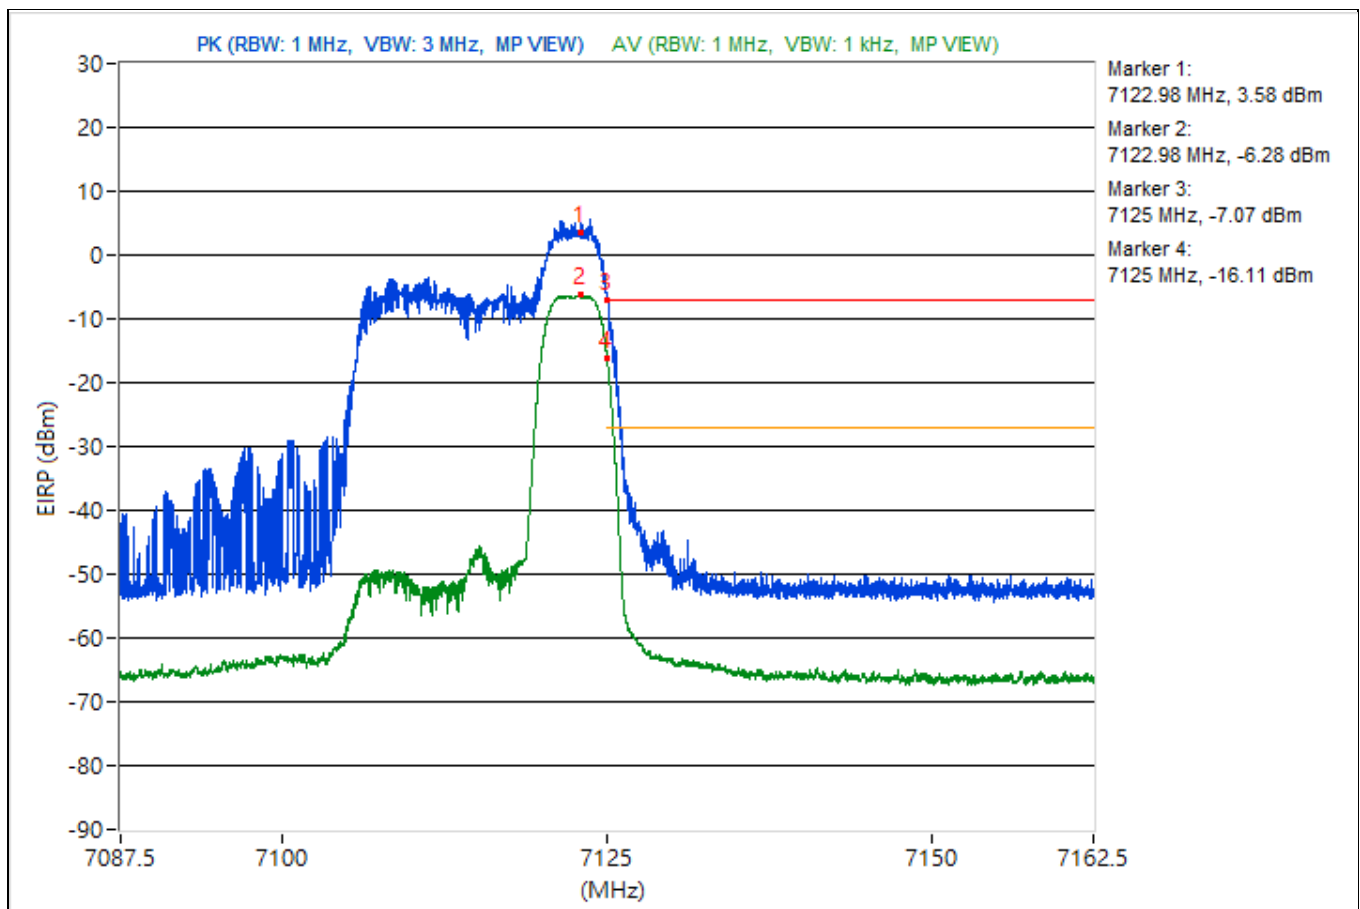


For Integration method:

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	55.11 AV	68.2	-13.09	-44.24	4.09	-40.15

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

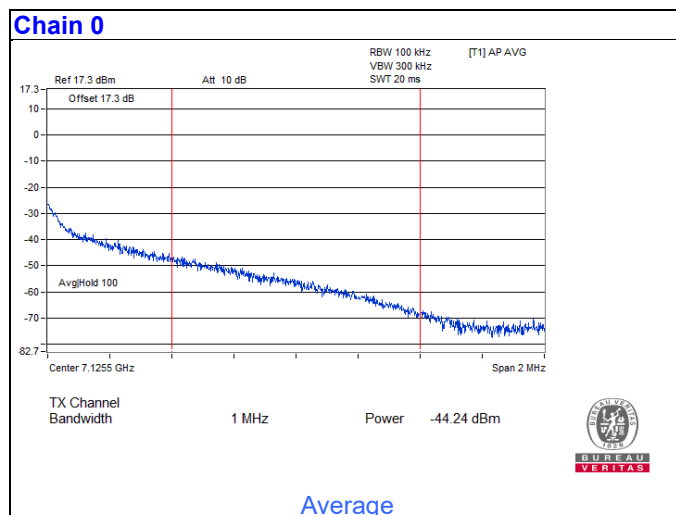


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5930.87	95.61 PK			-4.41	4.76	0.35
2	*5930.87	87.7 AV			-12.32	4.76	-7.56
3	#5924.98	88.19 PK	88.26	-0.07	-11.83	4.76	-7.07
4	!#5924.98	79.14 AV	68.26	10.88	-20.88	4.76	-16.12

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

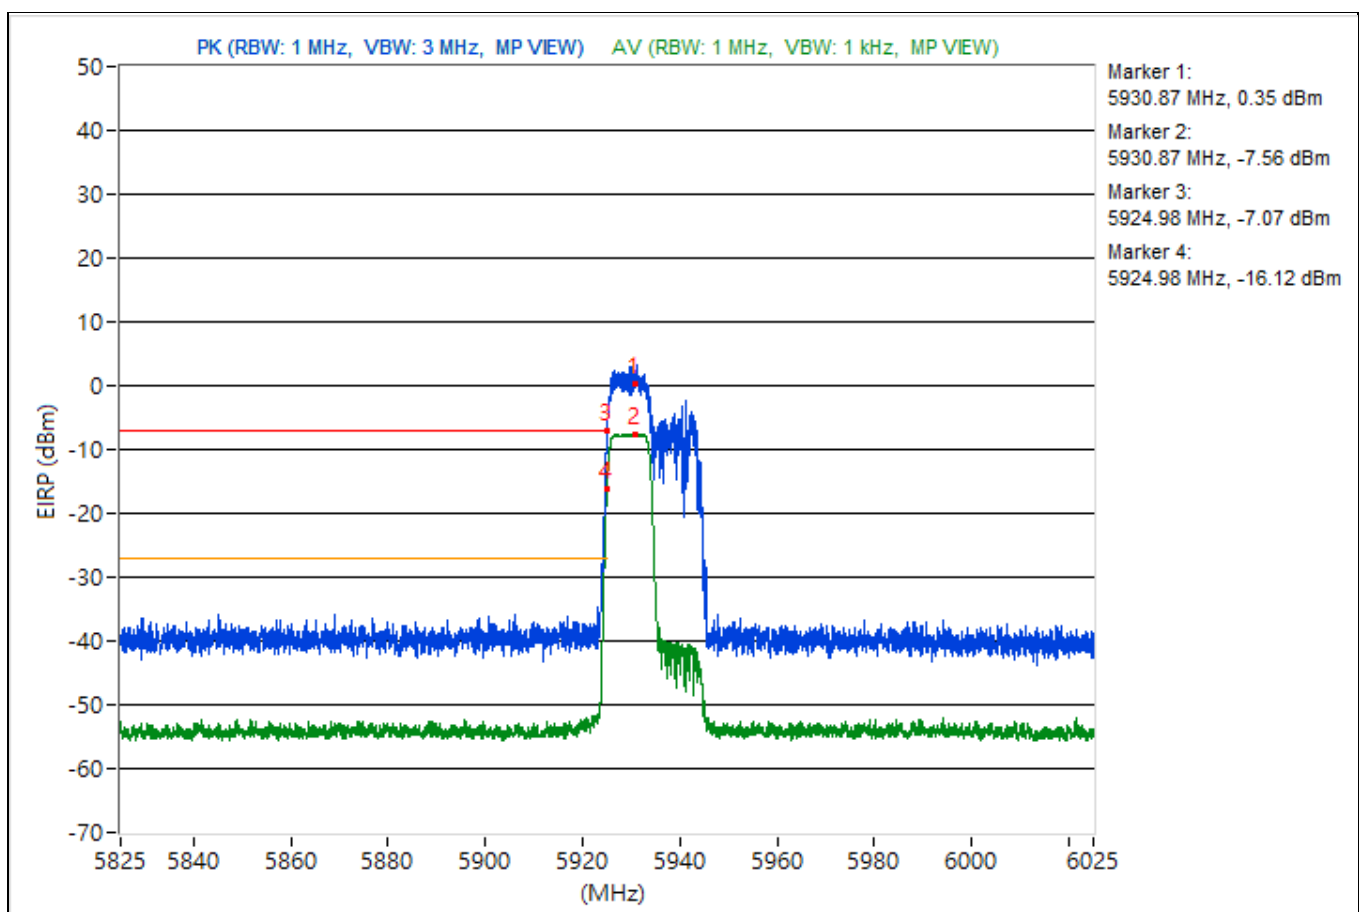


For Integration method:

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5935	56.54 AV	68.2	-11.66	-43.48	4.76	-38.72

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

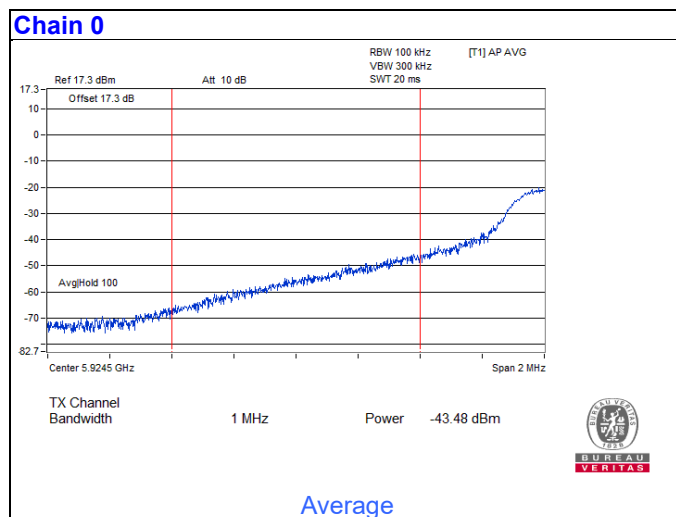


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5948.77	98.52 PK			-1.5	4.76	3.26
2	*5948.77	91.14 AV			-8.88	4.76	-4.12
3	#5921.1	45.12 PK	88.26	-43.14	-54.9	4.76	-50.14
4	#5921.1	35.65 AV	68.26	-32.61	-64.37	4.76	-59.61

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

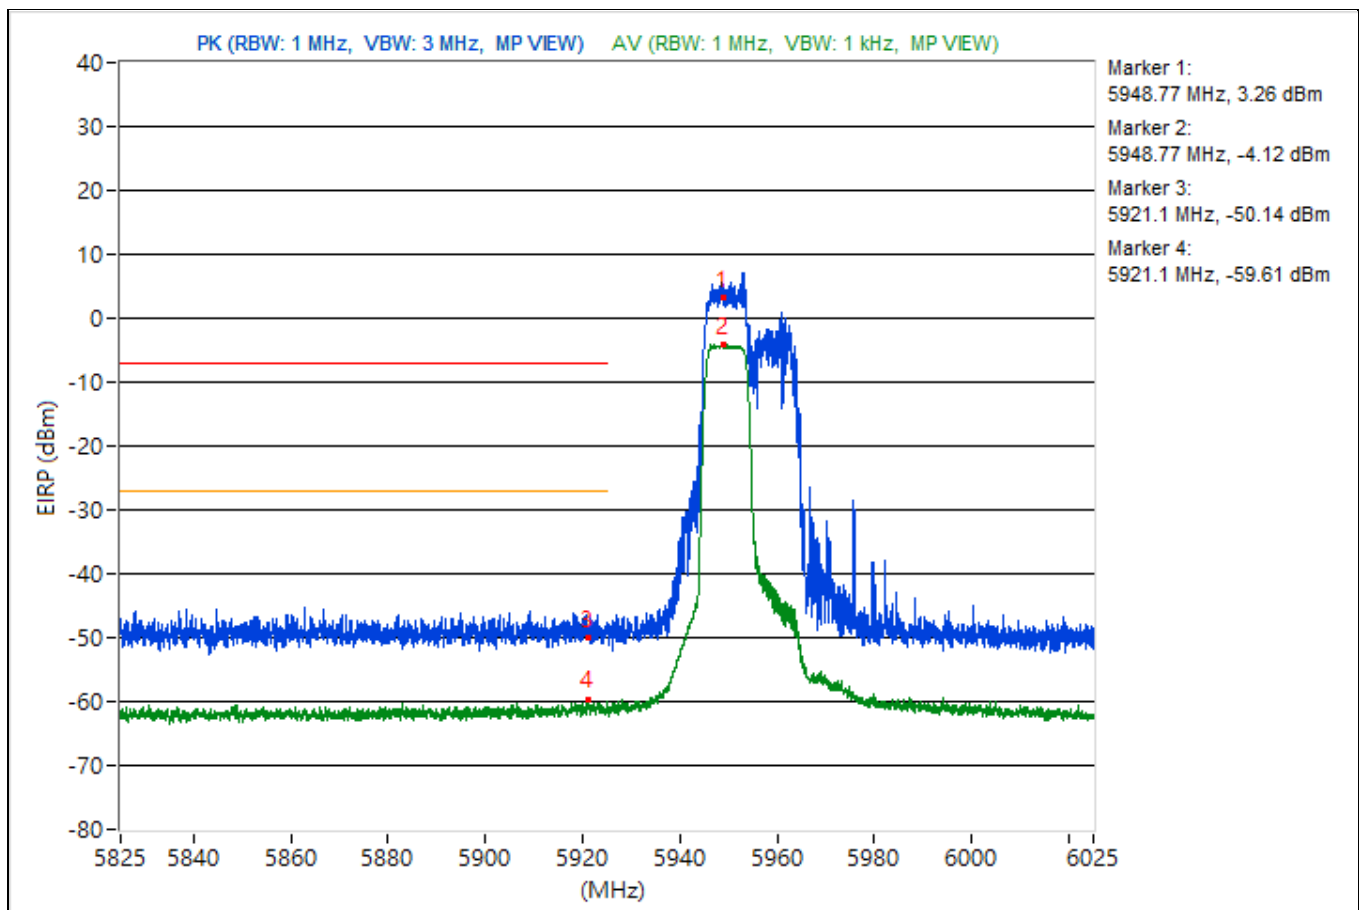


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7118.54	96.85 PK			-2.5	4.09	1.59
2	*7118.54	87.67 AV			-11.68	4.09	-7.59
3	#7125	88.21 PK	88.26	-0.05	-11.14	4.09	-7.05
4	!#7125	78.87 AV	68.26	10.61	-20.48	4.09	-16.39

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

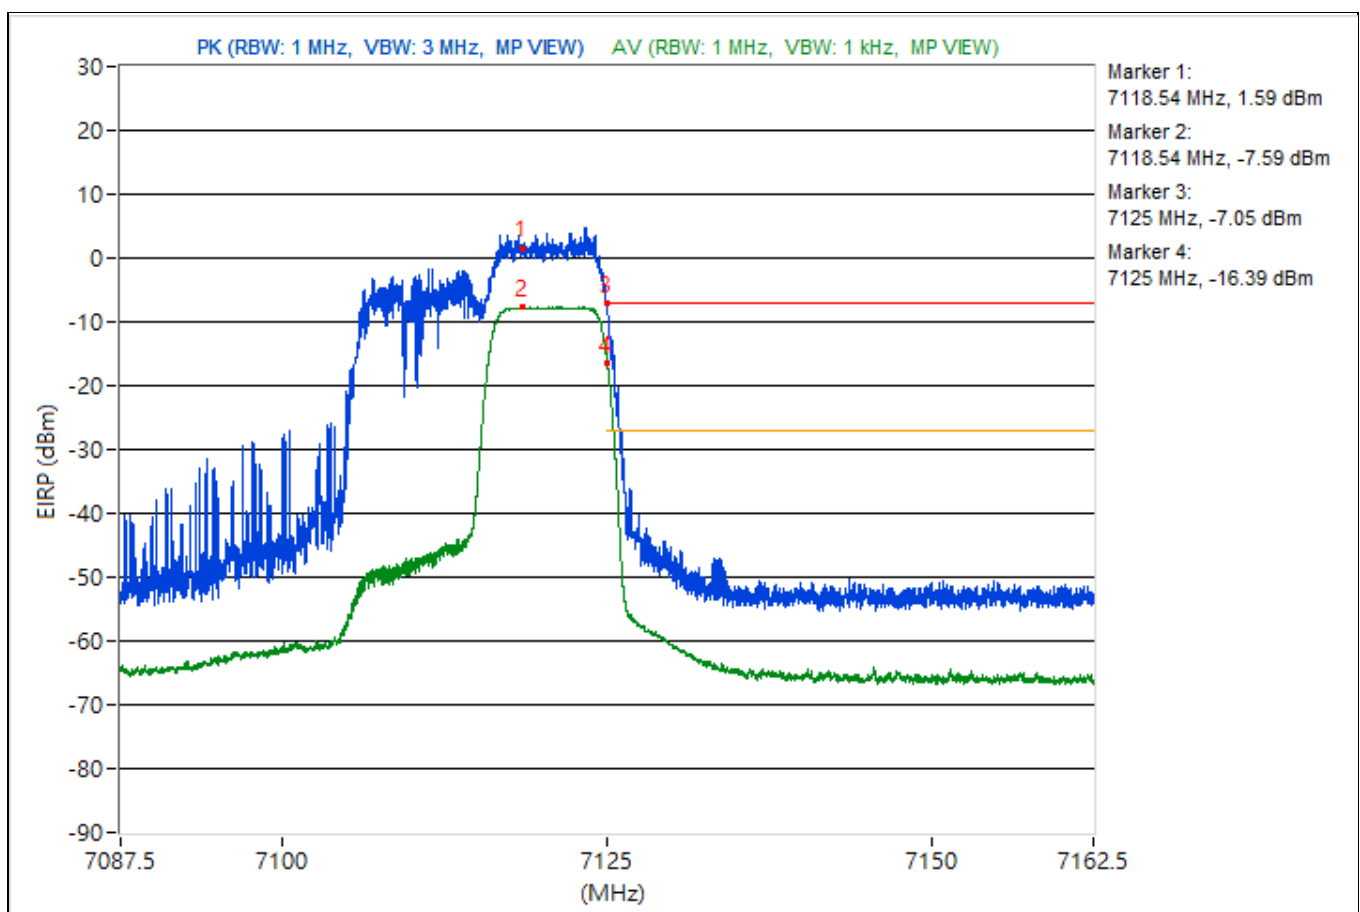


For Integration method:

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	55.09 AV	68.2	-13.11	-44.26	4.09	-40.17

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

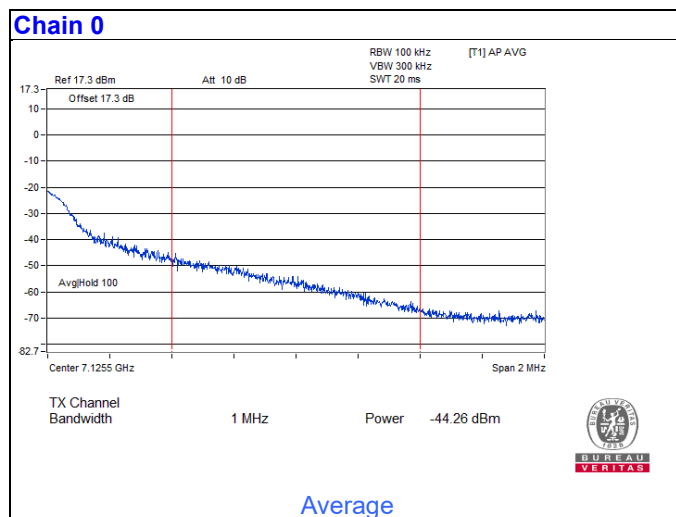


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5926.85	98.01 PK			-2.01	4.76	2.75
2	*5926.85	88.81 AV			-11.21	4.76	-6.45
3	#5924.98	87.42 PK	88.26	-0.84	-12.6	4.76	-7.84
4	!#5924.98	78.82 AV	68.26	10.56	-21.2	4.76	-16.44

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

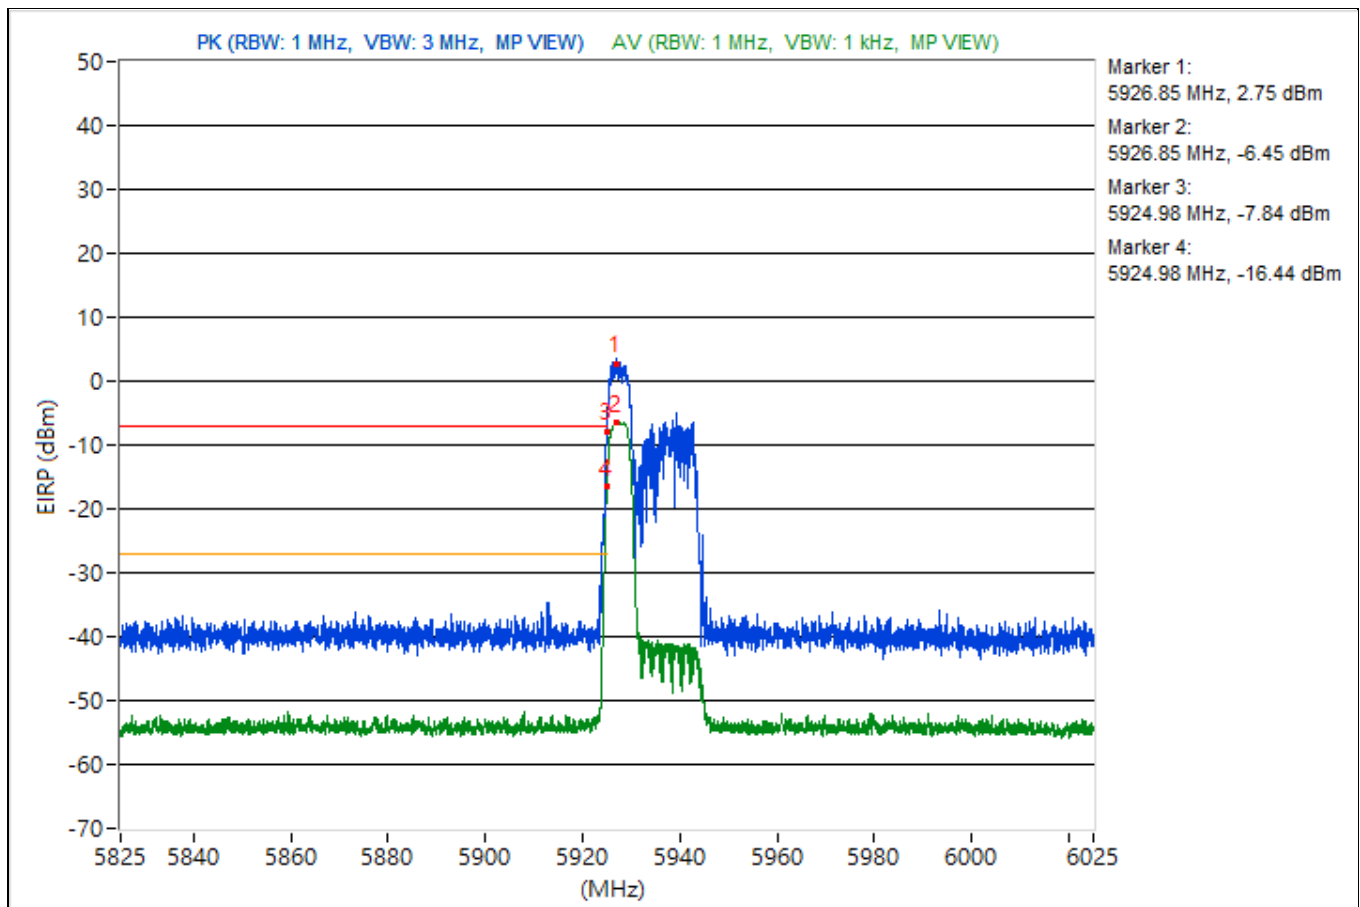


For Integration method:

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5935	56.49 AV	68.2	-11.71	-43.53	4.76	-38.77

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

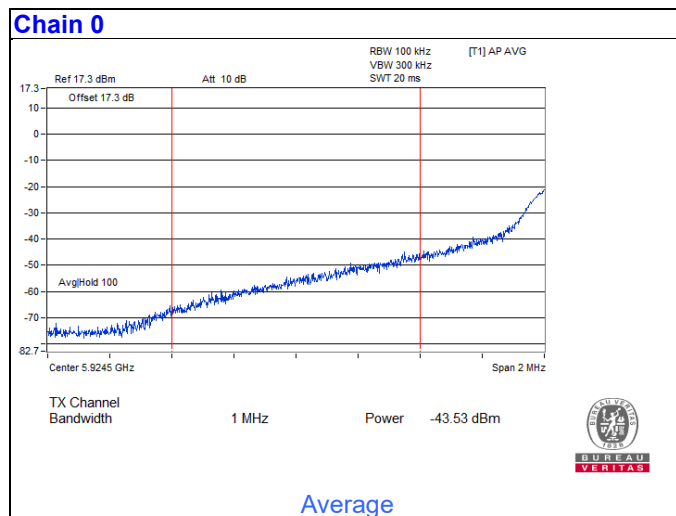


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5952.48	97.29 PK			-2.73	4.76	2.03
2	*5952.48	90.84 AV			-9.18	4.76	-4.42
3	#5892.1	45.92 PK	88.26	-42.34	-54.1	4.76	-49.34
4	#5892.1	34.87 AV	68.26	-33.39	-65.15	4.76	-60.39

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

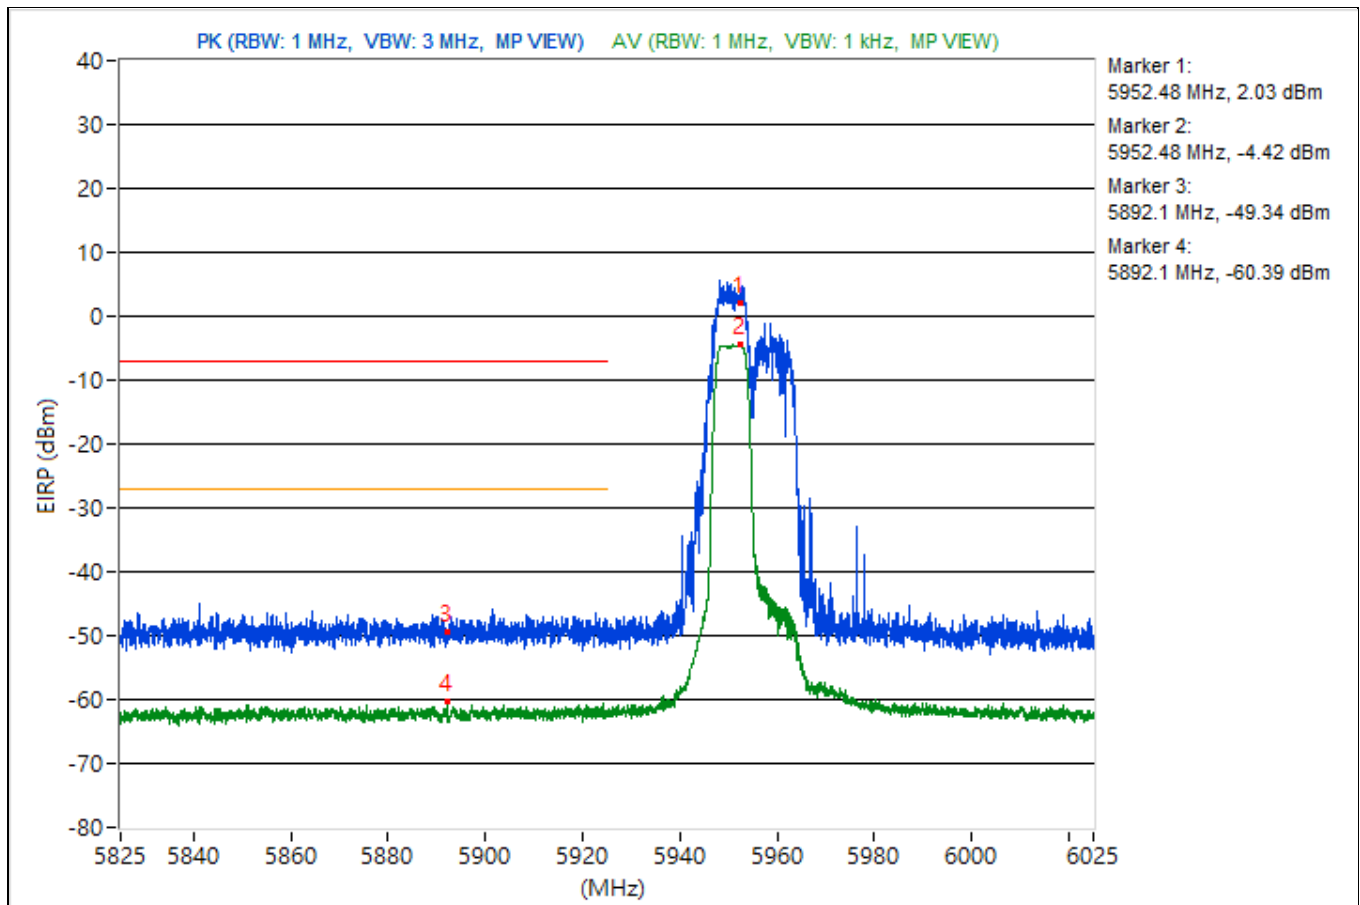


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7120.15	99.46 PK			0.11	4.09	4.2
2	*7120.15	90.09 AV			-9.26	4.09	-5.17
3	#7125	73.48 PK	88.26	-14.78	-25.87	4.09	-21.78
4	#7125	41.92 AV	68.26	-26.34	-57.43	4.09	-53.34

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

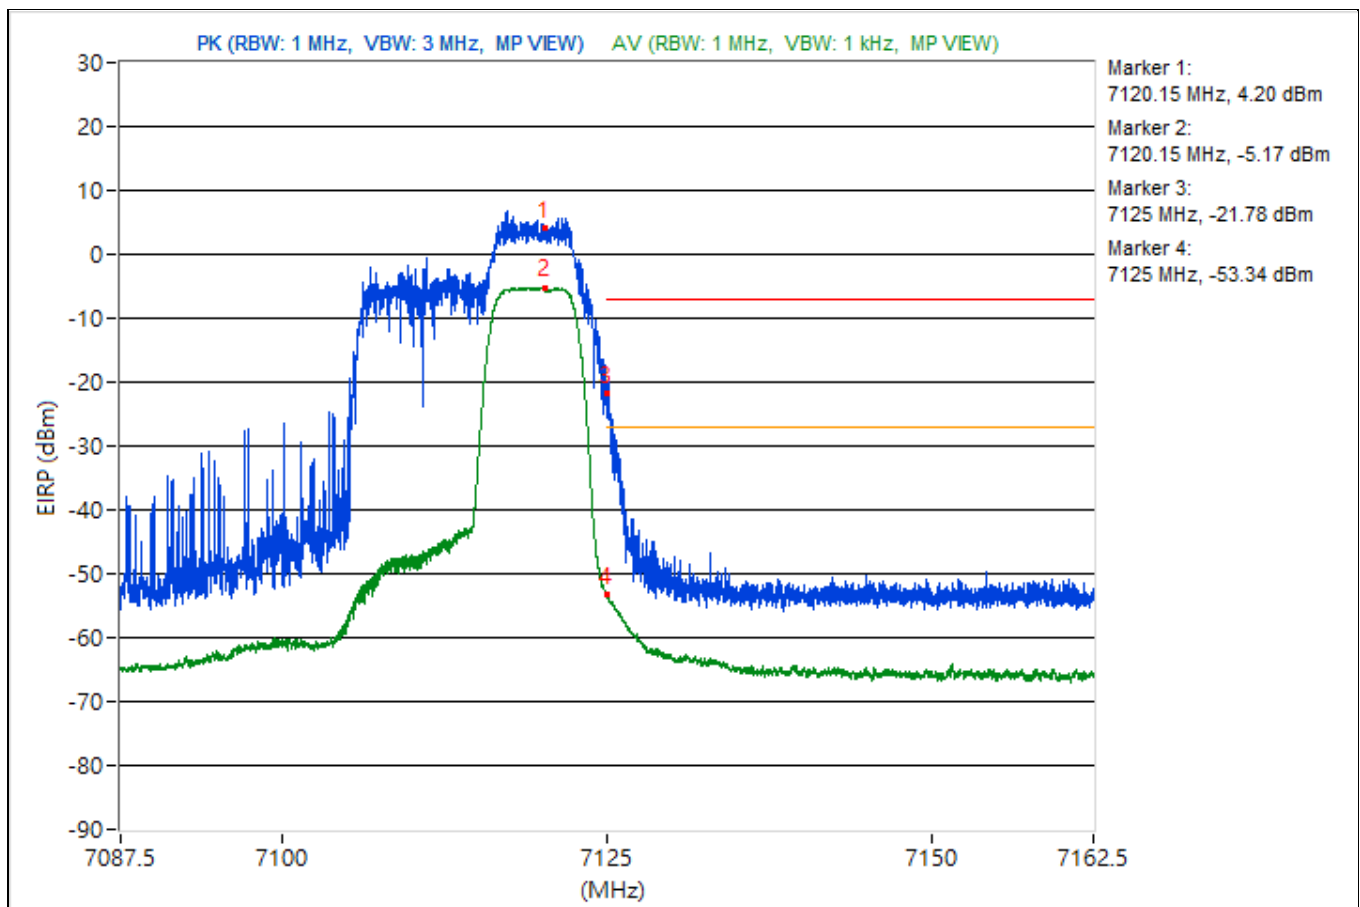


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	25°C, 66% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5934.1	97.43 PK			-2.59	4.76	2.17
2	*5934.1	90.34 AV			-9.68	4.76	-4.92
3	#5924.98	87.47 PK	88.26	-0.79	-12.55	4.76	-7.79
4	!#5924.98	78.01 AV	68.26	9.75	-22.01	4.76	-17.25

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

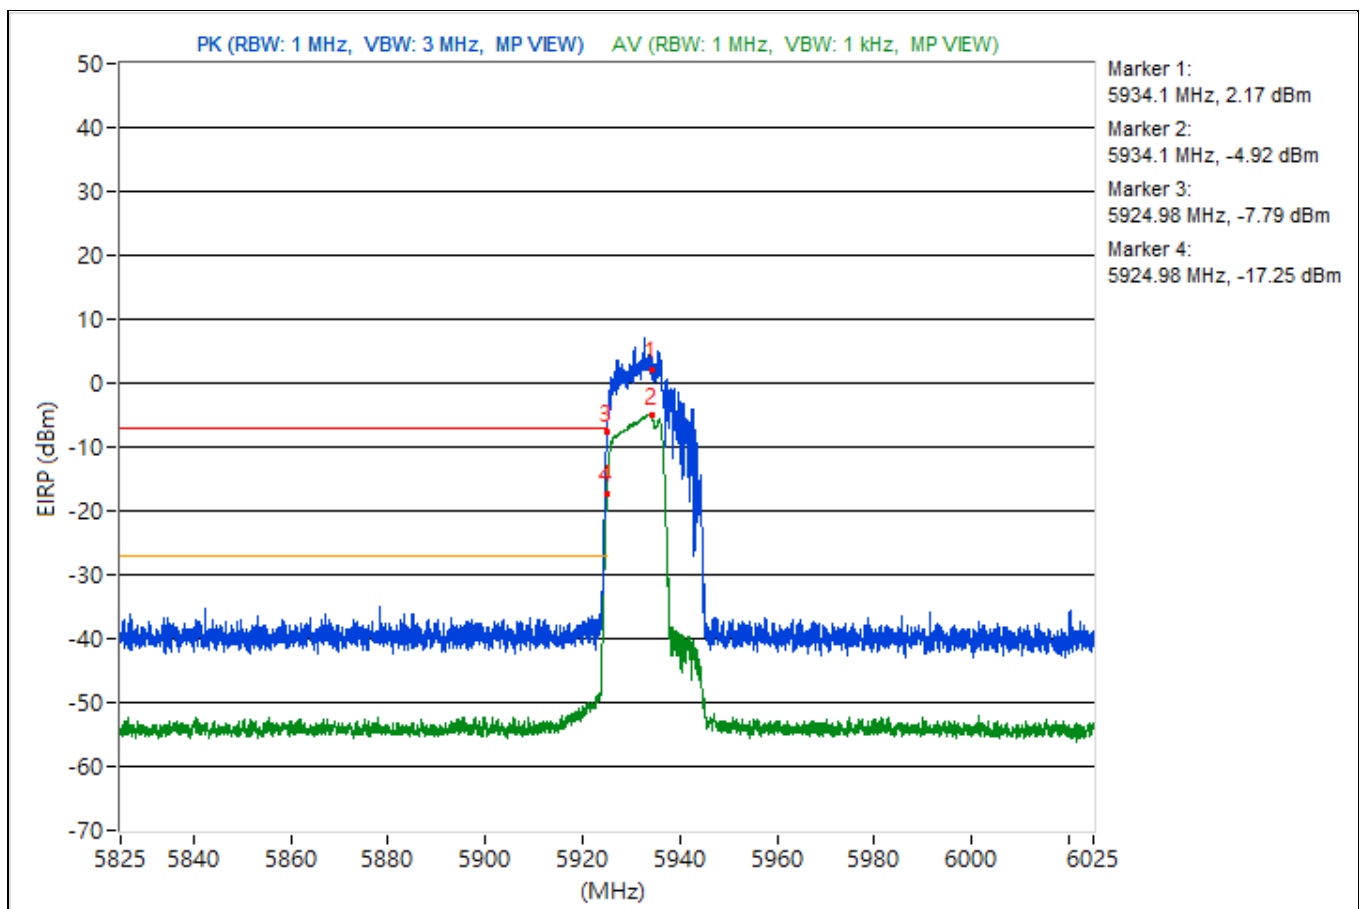


For Integration method:

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#5935	47.26 AV	68.2	-20.94	-52.76	4.76	-48.00

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

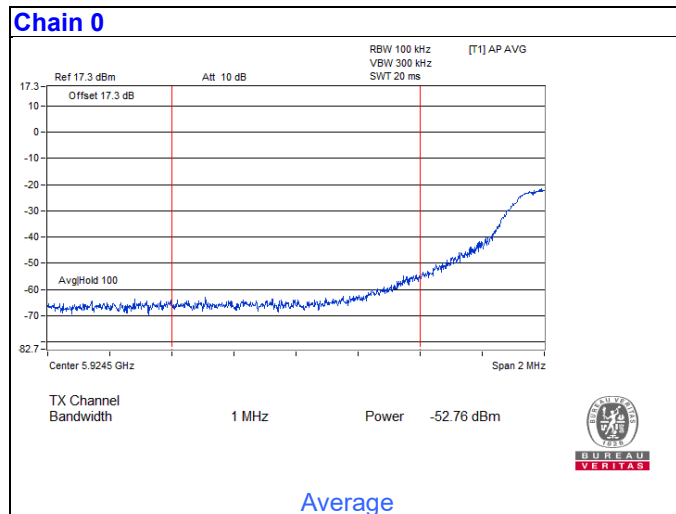


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5954	98.37 PK			-1.65	4.76	3.11
2	*5954	90.75 AV			-9.27	4.76	-4.51
3	#5922.75	46.85 PK	88.26	-41.41	-53.17	4.76	-48.41
4	#5922.75	35.16 AV	68.26	-33.1	-64.86	4.76	-60.1

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

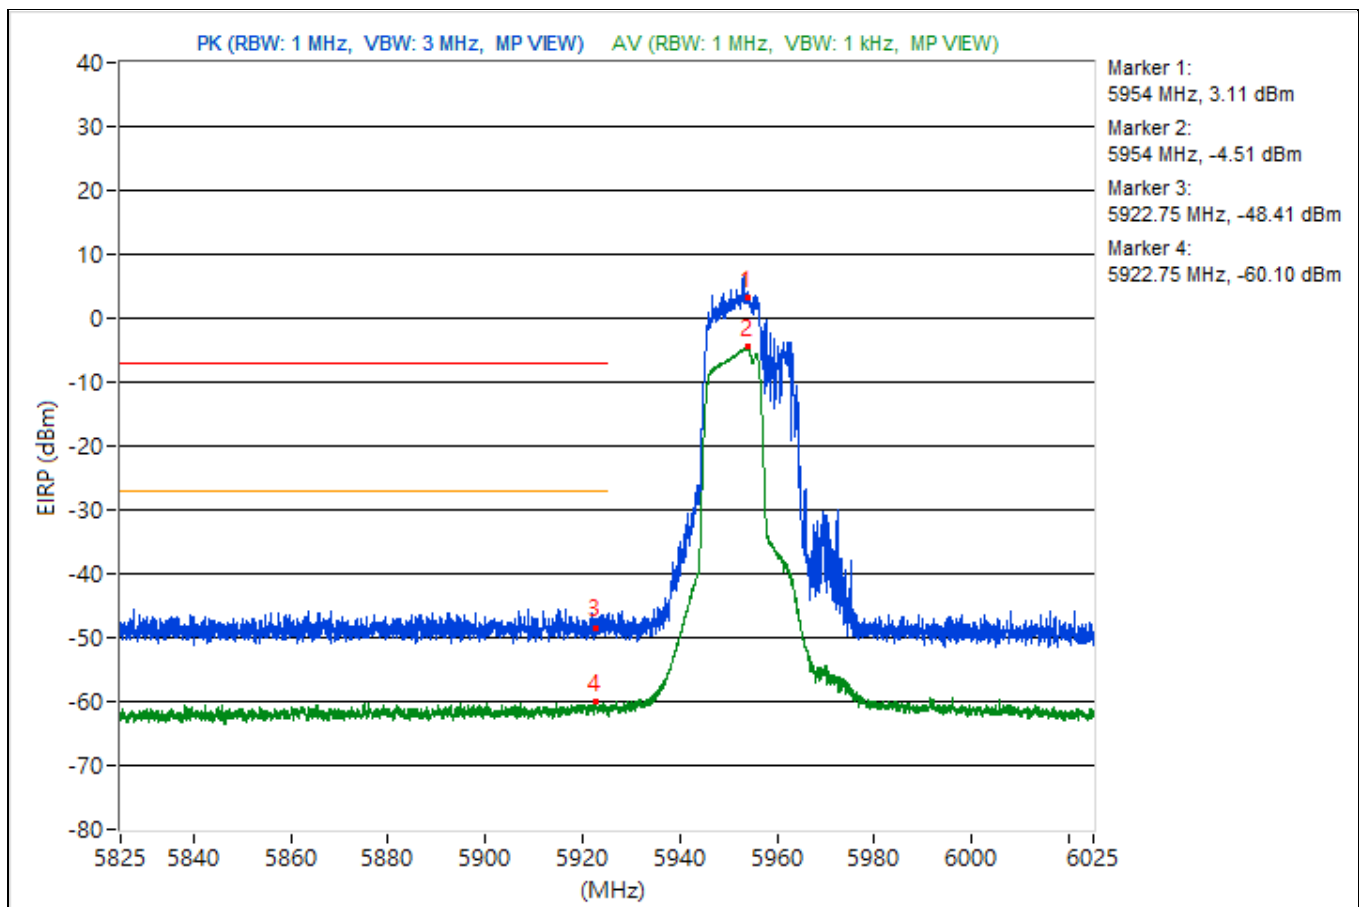


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	7.088 GHz ~ 7.162 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7116.11	102.47 PK			3.12	4.09	7.21
2	*7116.11	91.65 AV			-7.7	4.09	-3.61
3	#7125	88.12 PK	88.26	-0.14	-11.23	4.09	-7.14
4	!#7125	79.63 AV	68.26	11.37	-19.72	4.09	-15.63

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.
4. " ! ": The unwanted emission was verified and the test result was passed. (Please refer to the integration method test results below)

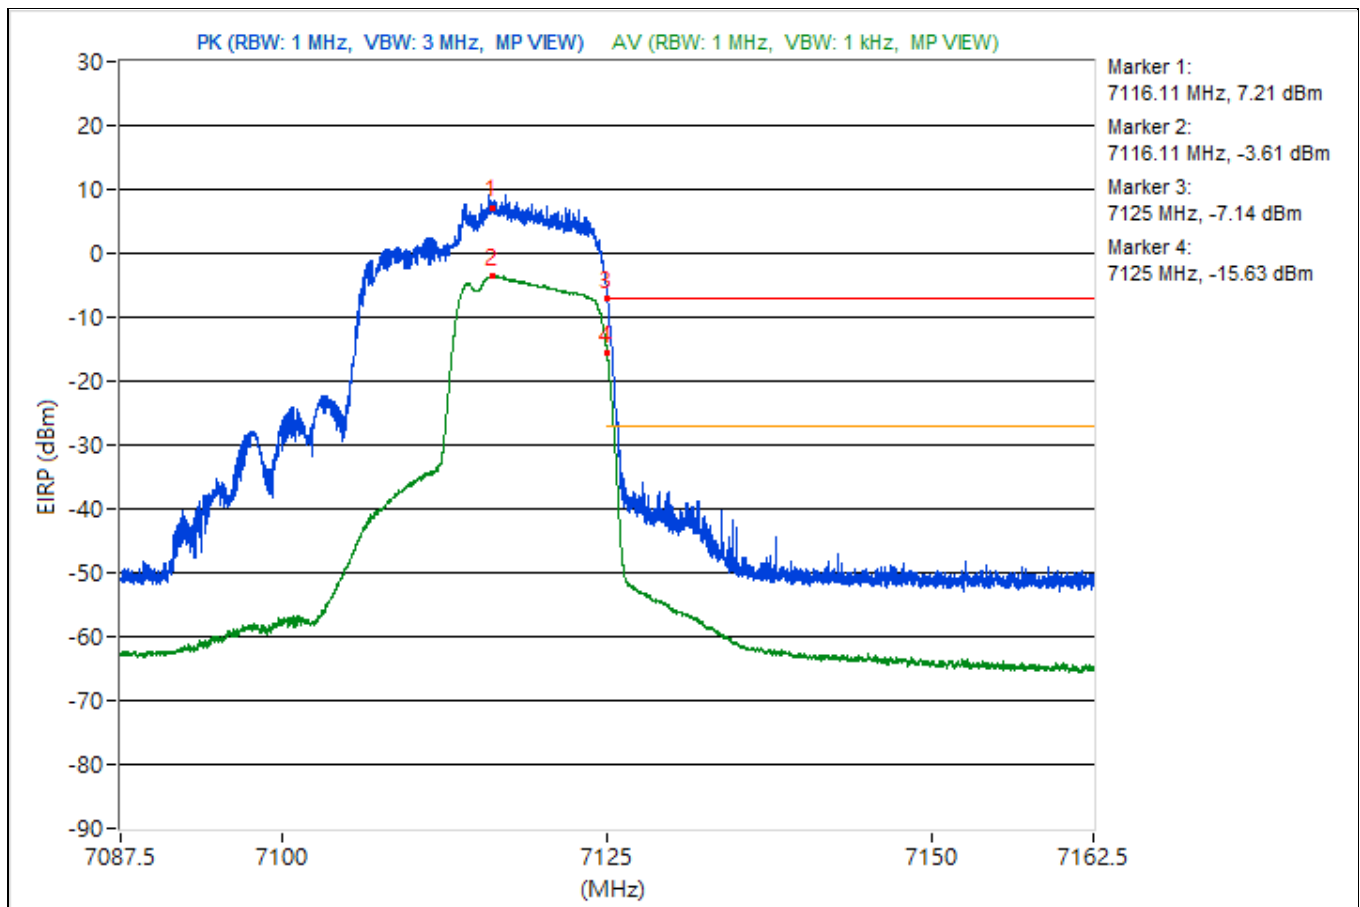


For Integration method:

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Environmental Conditions	25°C, 54% RH	Tested By	Henry Hsu

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	#7125	47.23 AV	68.2	-20.97	-52.12	4.09	-48.03

Notes:

1. Margin value = Emission Level - Limit value
2. " # ": The radiated frequency is out of the restricted band.
3. Follow ANSI C63.10 section 11.12.3.2 Integration method.

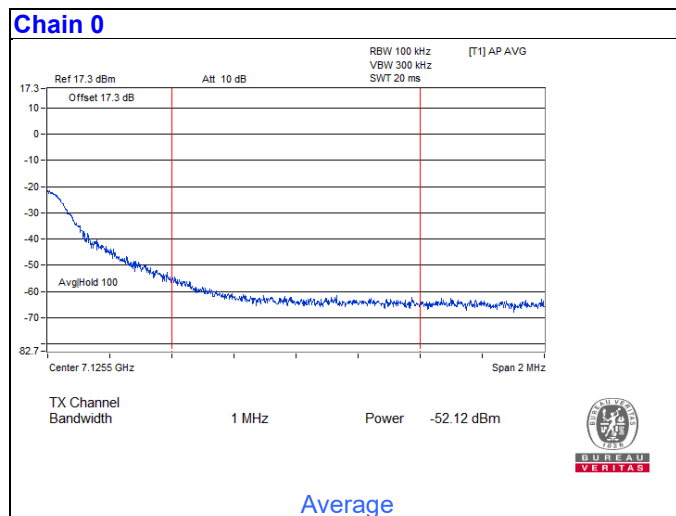


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	5.825 GHz ~ 6.025 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*5982.5	97.88 PK			-2.14	4.76	2.62
2	*5982.5	88.46 AV			-11.56	4.76	-6.8
3	#5924.4	49.86 PK	88.26	-38.4	-50.16	4.76	-45.4
4	#5924.4	41.33 AV	68.26	-26.93	-58.69	4.76	-53.93

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

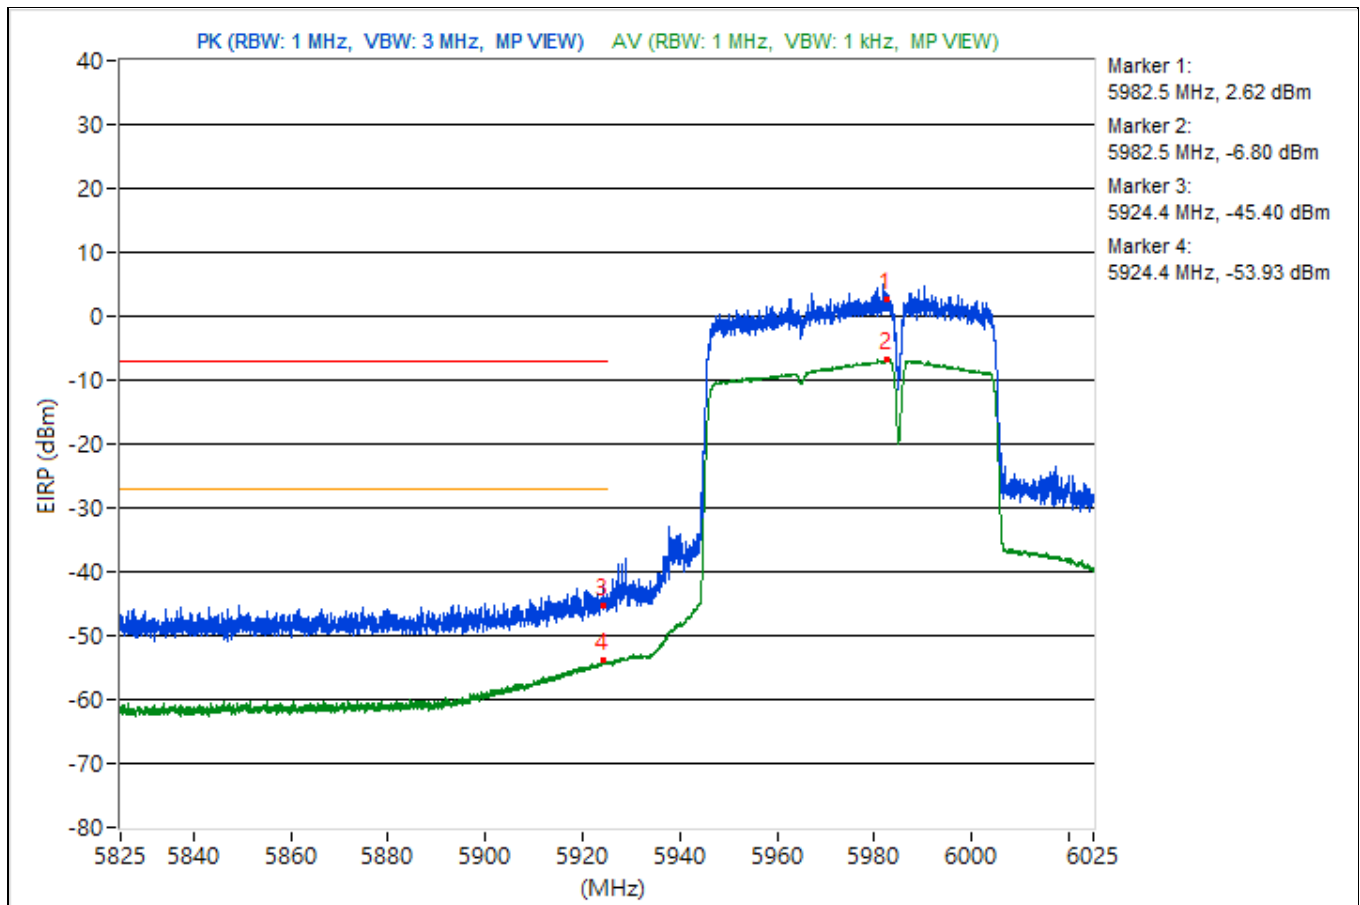


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	6.975 GHz ~ 7.275 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*7022.89	99.52 PK			0.17	4.09	4.26
2	*7022.89	91.46 AV			-7.89	4.09	-3.8
3	#7125.37	43.38 PK	88.26	-44.88	-55.97	4.09	-51.88
4	#7125.37	35.05 AV	68.26	-33.21	-64.3	4.09	-60.21

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

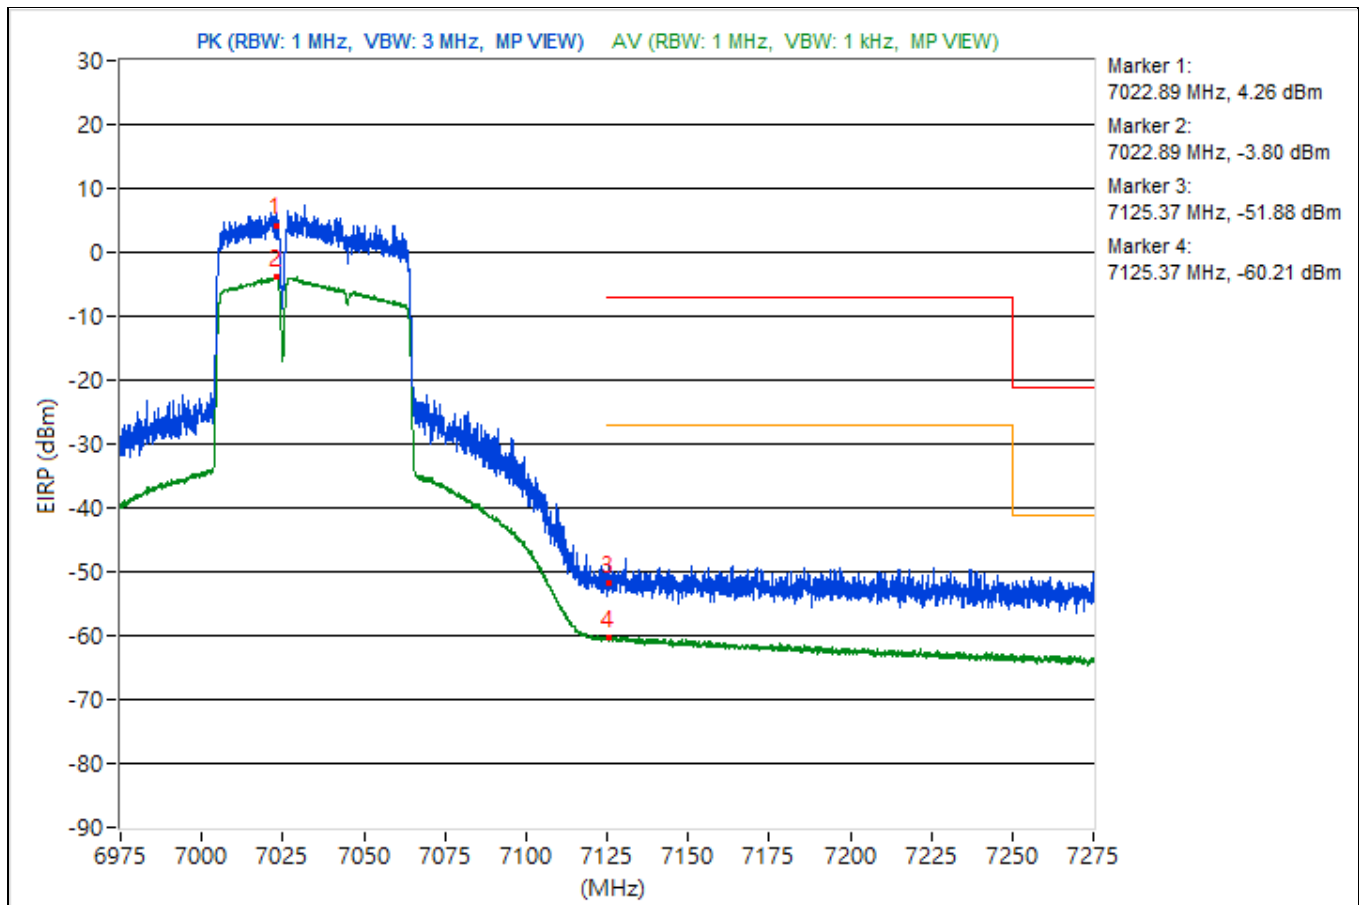


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.725 GHz ~ 6.125 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6023.1	98.94 PK			-1.08	4.76	3.68
2	*6023.1	88.45 AV			-11.57	4.76	-6.81
3	#5917.4	51.7 PK	88.26	-36.56	-48.32	4.76	-43.56
4	#5917.4	41.88 AV	68.26	-26.38	-58.14	4.76	-53.38

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

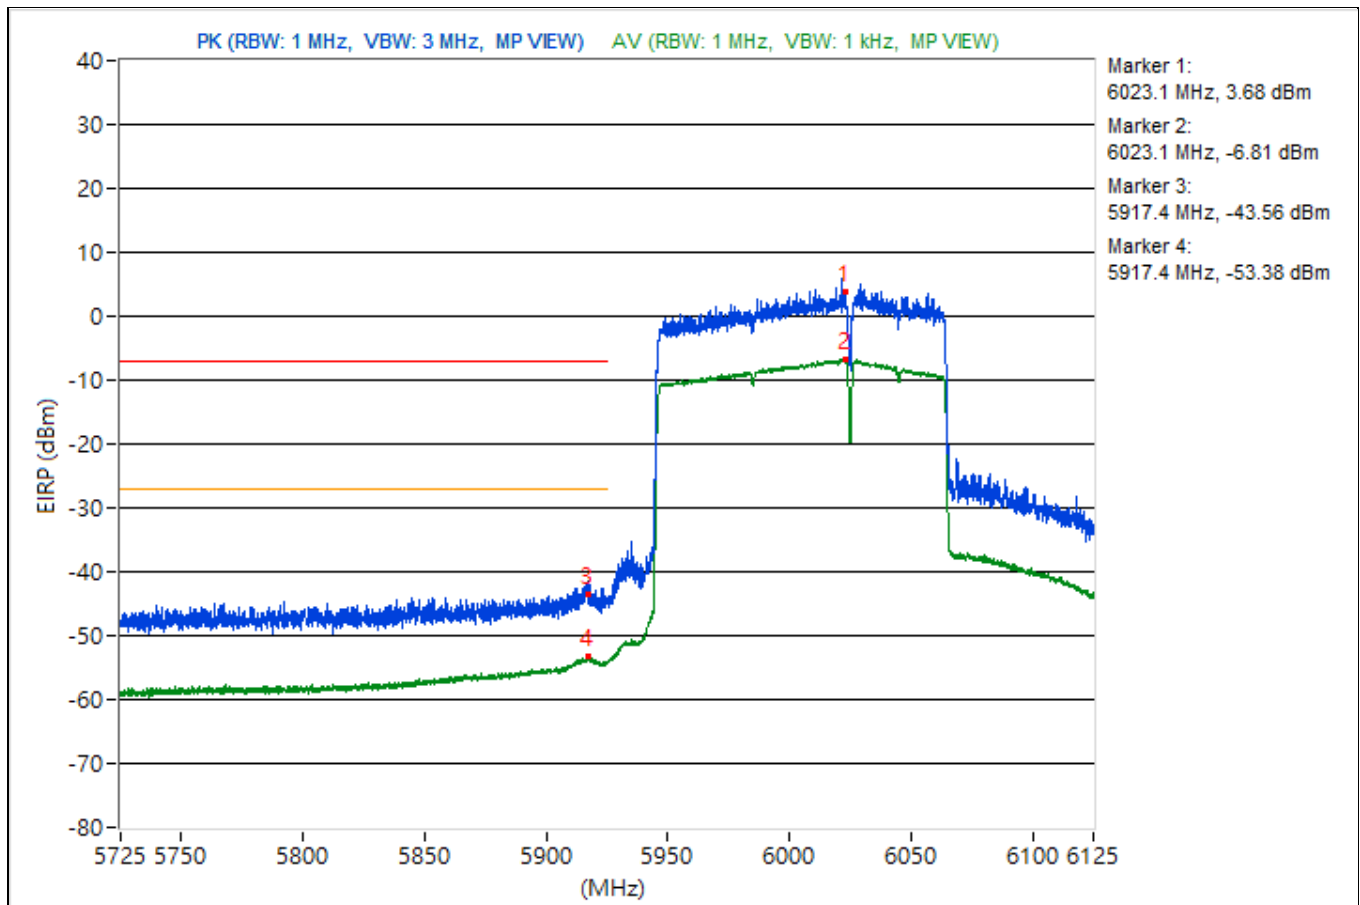


RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	6.875 GHz ~ 7.375 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6983.31	95.26 PK			-4.09	4.09	0
2	*6983.31	88.49 AV			-10.86	4.09	-6.77
3	#7125.12	54.11 PK	88.26	-34.15	-45.24	4.09	-41.15
4	#7125.12	46.83 AV	68.26	-21.43	-52.52	4.09	-48.43

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

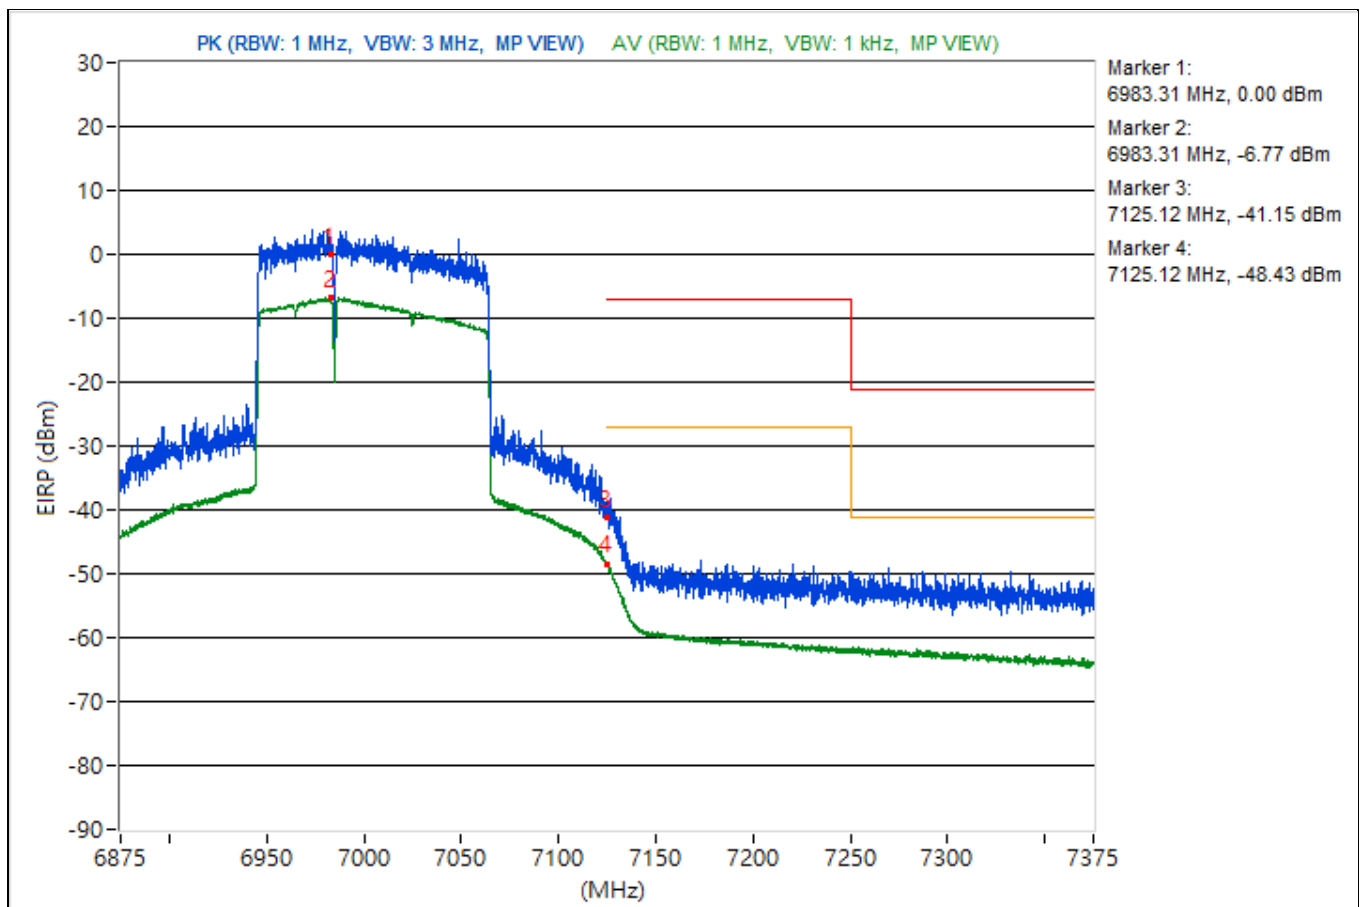


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	5.725 GHz ~ 6.125 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6021.5	95.64 PK			-4.38	4.76	0.38
2	*6021.5	87.95 AV			-12.07	4.76	-7.31
3	#5924.55	53.05 PK	88.26	-35.21	-46.97	4.76	-42.21
4	#5924.55	45.57 AV	68.26	-22.69	-54.45	4.76	-49.69

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

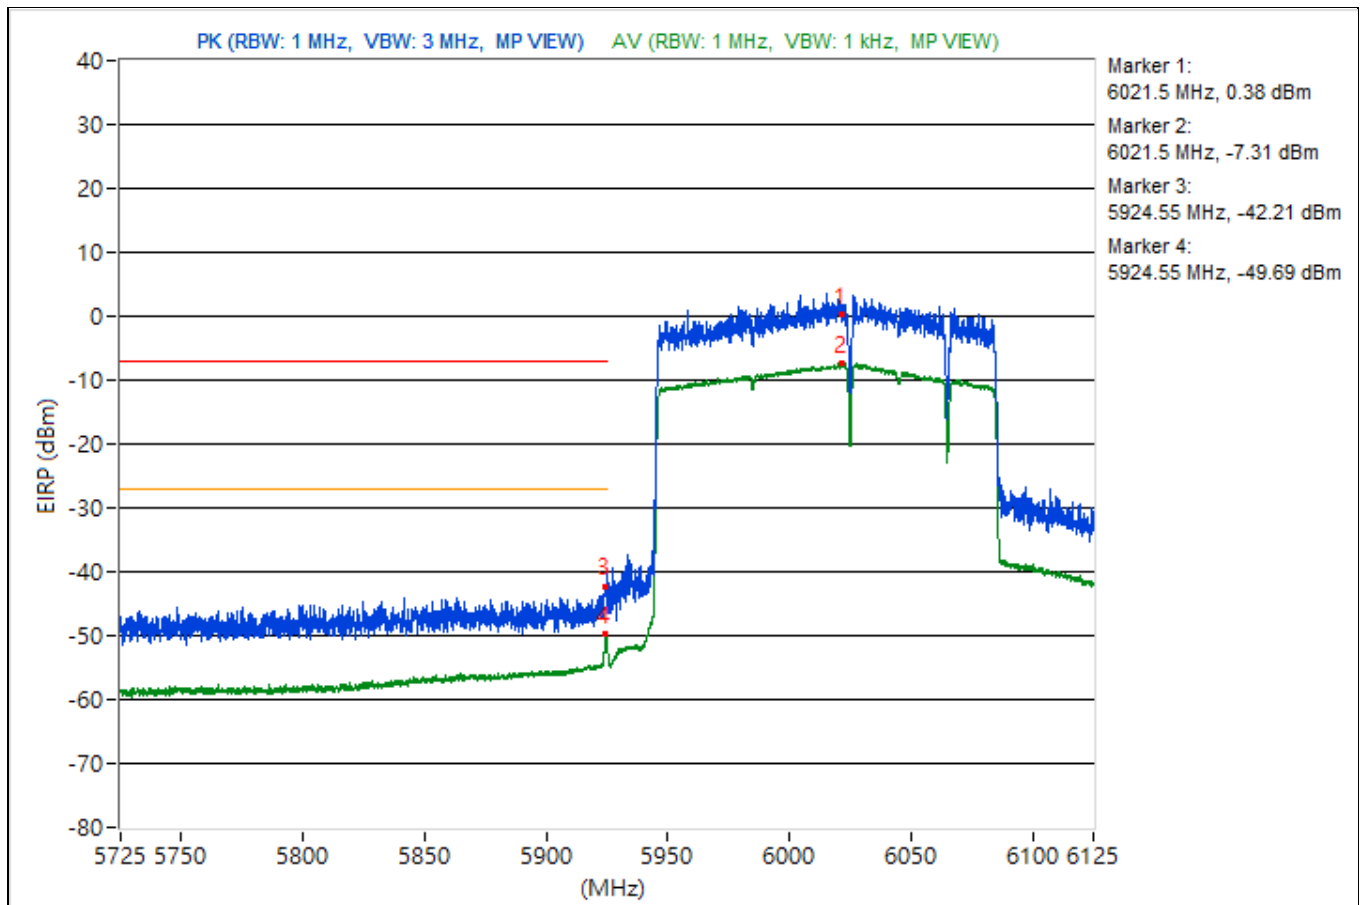


RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	6.875 GHz ~ 7.375 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Band Edge							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	*6987	96.26 PK			-3.09	4.09	1
2	*6987	87.93 AV			-11.42	4.09	-7.33
3	#7125.12	57.14 PK	88.26	-31.12	-42.21	4.09	-38.12
4	#7125.12	47.82 AV	68.26	-20.44	-51.53	4.09	-47.44

Notes:

1. Margin value = Emission Level - Limit value
2. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
3. " # ": The radiated frequency is out of the restricted band.

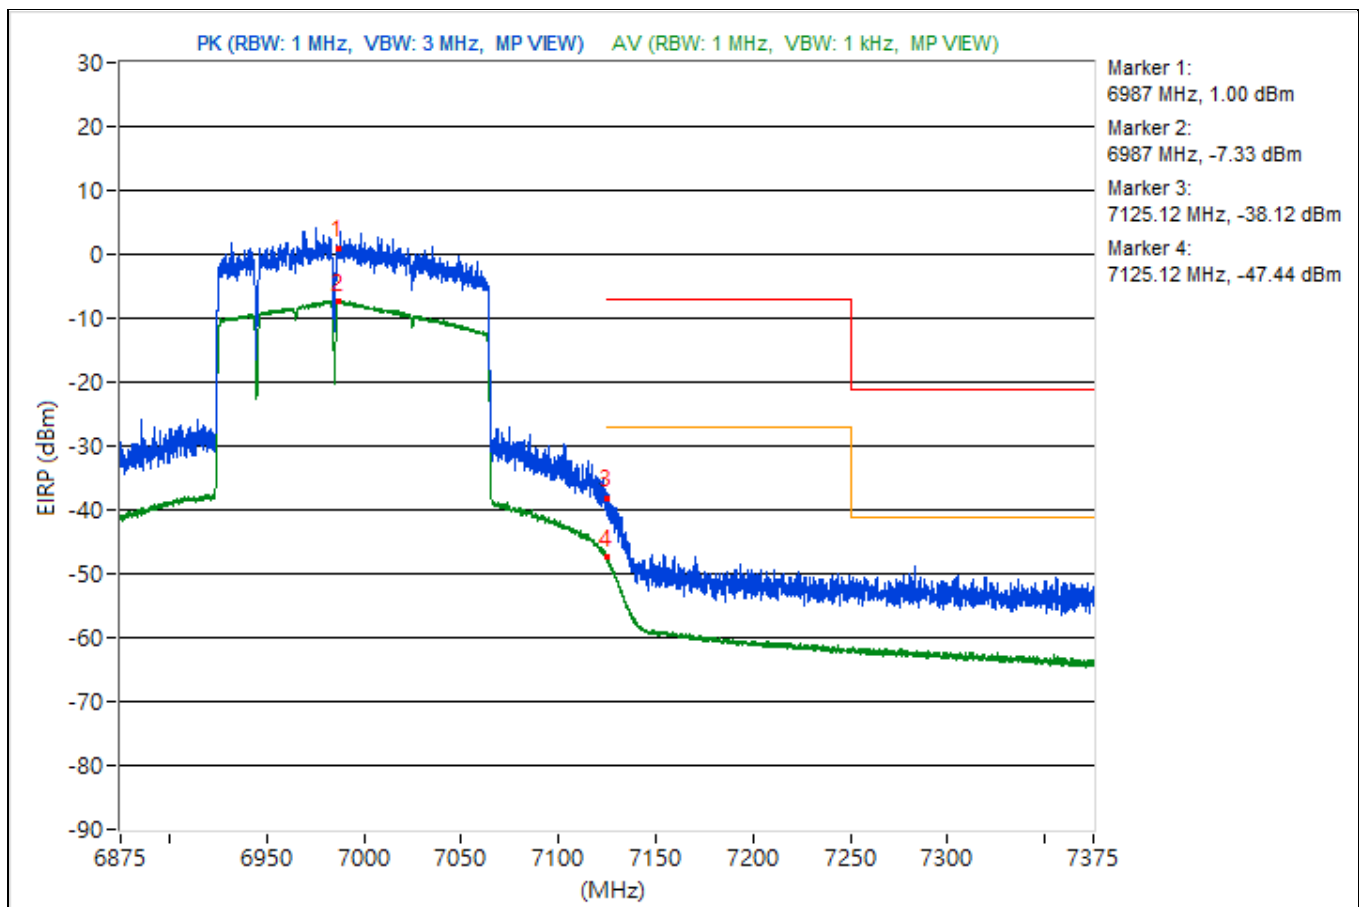


2TX


Conducted Unwanted Emissions

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3827.38	54.08 PK	74	-19.92	-51.71	-52.58	7.93	-41.18
2	3827.38	40.41 AV	54	-13.59	-67.87	-64.39	7.93	-54.85
3	14484.27	49.89 PK	74	-24.11	-55.44	-57.41	7.93	-45.37
4	14484.27	39.73 AV	54	-14.27	-67.89	-65.4	7.93	-55.53
5	18950.6	52.94 PK	74	-21.06	-52.82	-53.76	7.93	-42.32
6	18950.6	41.67 AV	54	-12.33	-63.79	-65.42	7.93	-53.59
7	23736.7	55.35 PK	74	-18.65	-52.37	-49.73	7.93	-39.91
8	23736.7	41.93 AV	54	-12.07	-63.08	-65.9	7.93	-53.33
9	38644.8	46.96 PK	74	-27.04	-59.1	-59.39	7.93	-48.3
10	38644.8	37.83 AV	54	-16.17	-70.02	-67.17	7.93	-57.43

Note: Margin value = Emission Level - Limit value

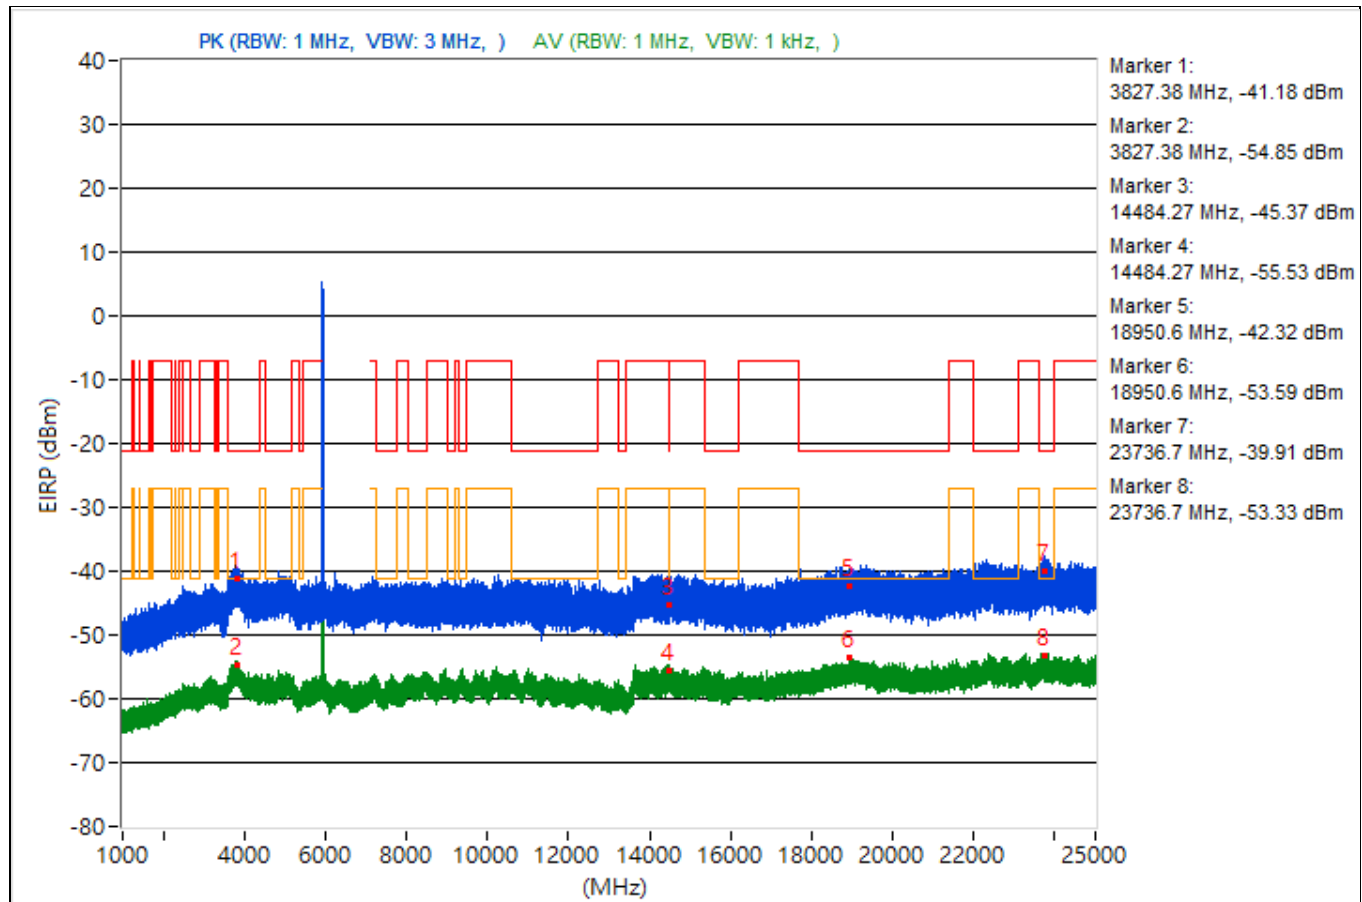


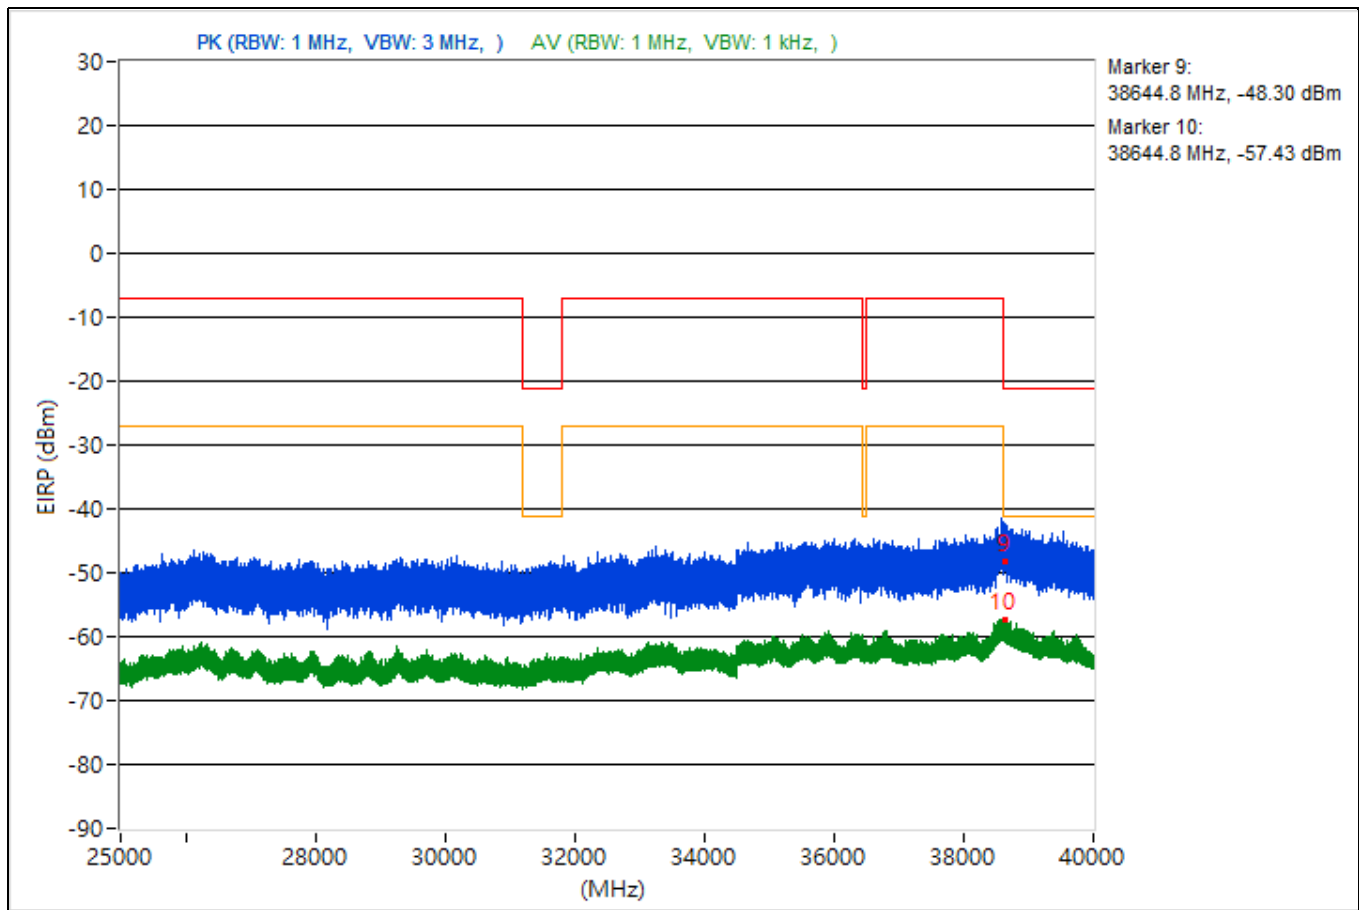


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3851.49	50.77 PK	74	-23.23	-57.01	-54.28	7.93	-44.49
2	3851.49	41.31 AV	54	-12.69	-64.22	-65.67	7.93	-53.95
3	14482.84	49.41 PK	74	-24.59	-56.63	-56.95	7.93	-45.85
4	14482.84	40.24 AV	54	-13.76	-65.08	-67.06	7.93	-55.02
5	19321.2	53.45 PK	74	-20.55	-52.62	-52.9	7.93	-41.81
6	19321.2	41.17 AV	54	-12.83	-66.75	-63.81	7.93	-54.09
7	23693.7	53.27 PK	74	-20.73	-52.75	-53.13	7.93	-41.99
8	23693.7	42.44 AV	54	-11.56	-62.83	-64.95	7.93	-52.82
9	38610.93	45.19 PK	74	-28.81	-62.43	-59.95	7.93	-50.07
10	38610.93	37.74 AV	54	-16.26	-67.48	-69.72	7.93	-57.52

Note: Margin value = Emission Level - Limit value

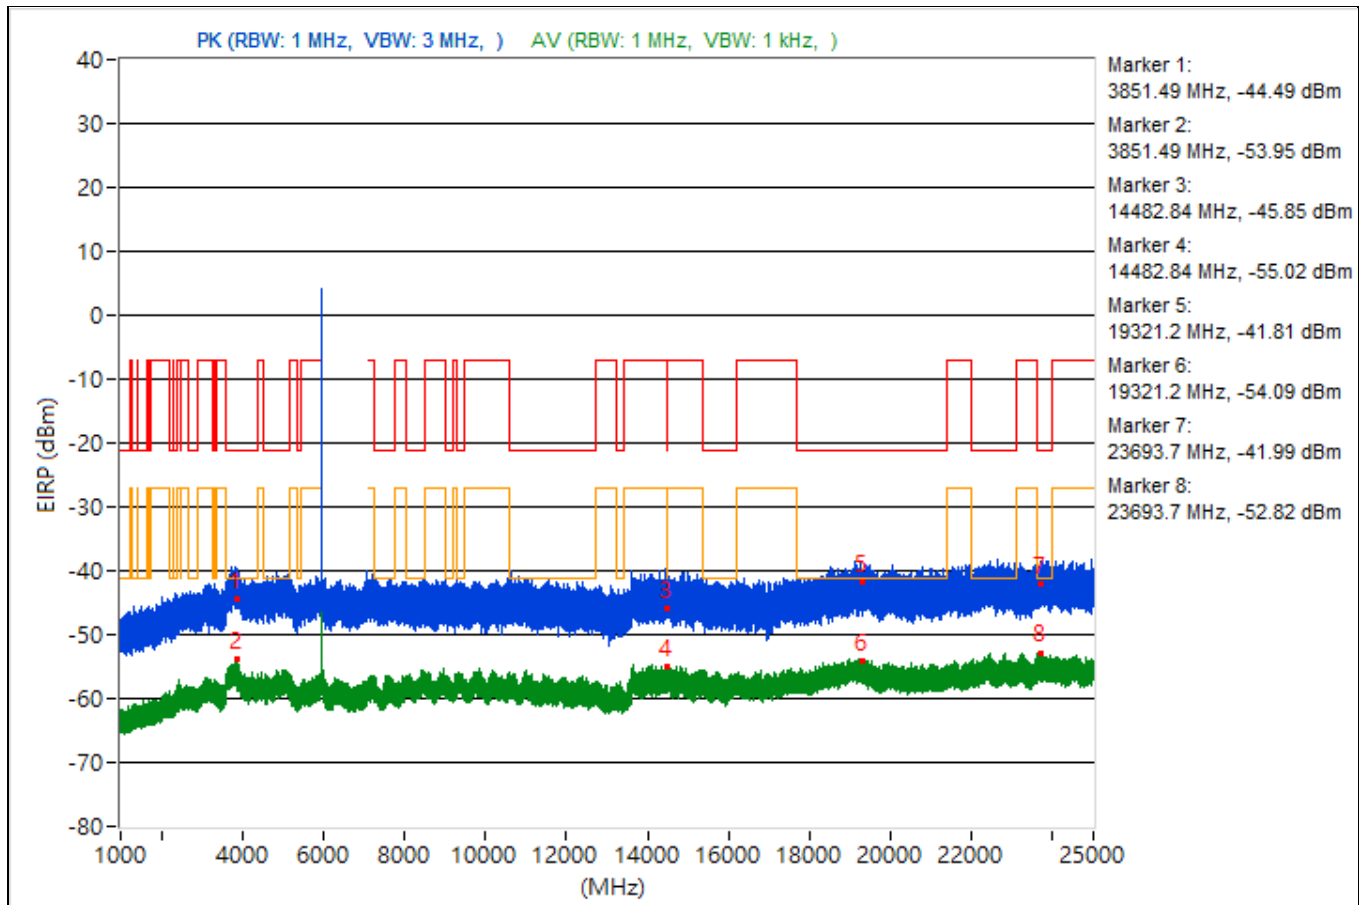


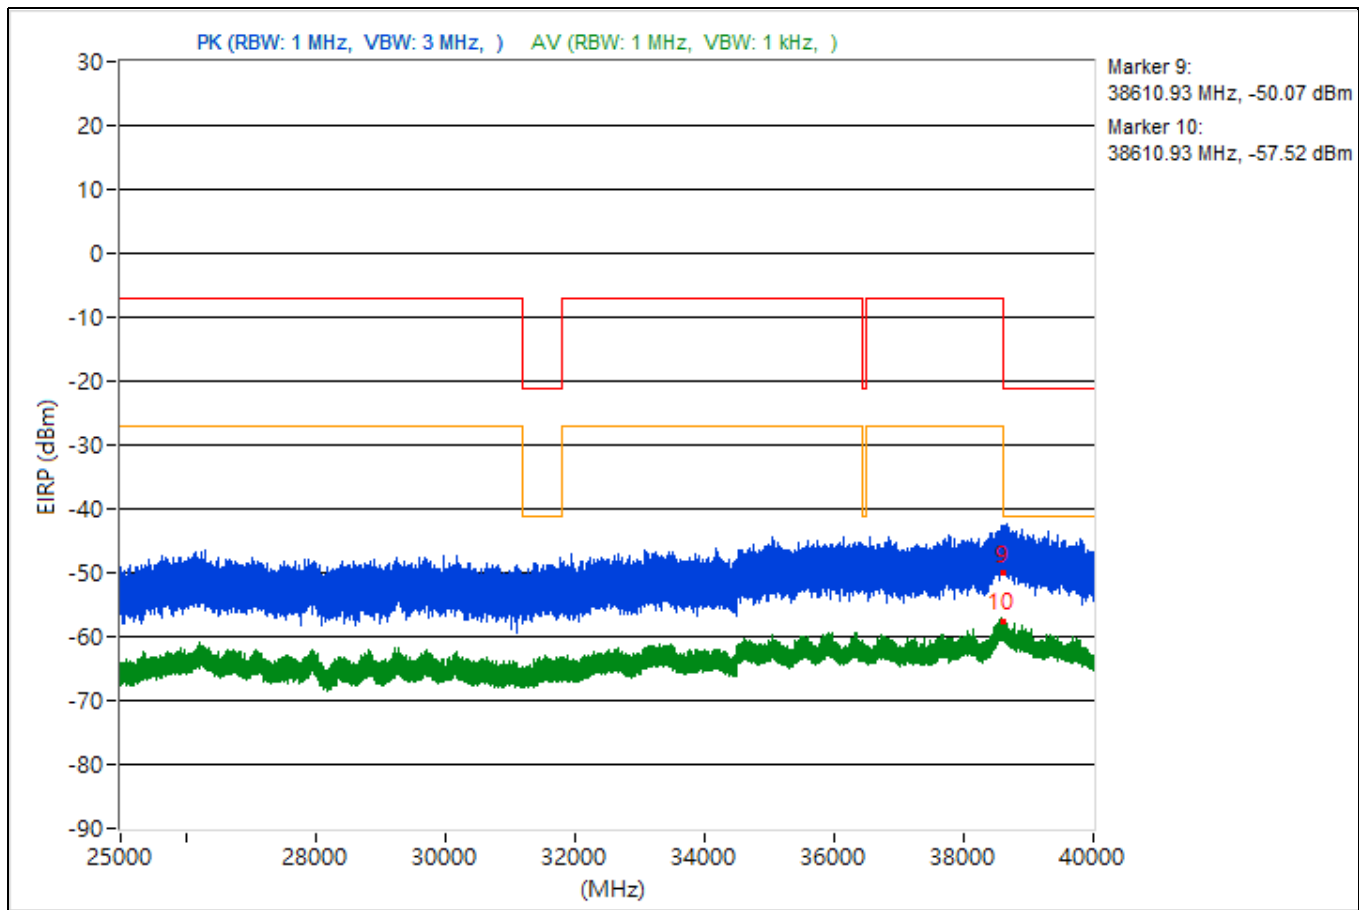


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3791.52	53.59 PK	74	-20.41	-52.89	-52.35	7.93	-41.67
2	3791.52	41.15 AV	54	-12.85	-65.6	-64.57	7.93	-54.11
3	14491.2	50.02 PK	74	-23.98	-57.31	-55.29	7.93	-45.24
4	14491.2	40.34 AV	54	-13.66	-65.25	-66.57	7.93	-54.92
5	19123.6	51.41 PK	74	-22.59	-53.2	-57.32	7.93	-43.85
6	19123.6	41.29 AV	54	-12.71	-65.73	-64.23	7.93	-53.97
7	22412.9	53 PK	74	-21	-52.25	-54.42	7.93	-42.26
8	22412.9	41.77 AV	54	-12.23	-62.72	-67.29	7.93	-53.49
9	38621.42	47.08 PK	74	-26.92	-61.71	-57.51	7.93	-48.18
10	38621.42	37.46 AV	54	-16.54	-67.44	-70.59	7.93	-57.8

Note: Margin value = Emission Level - Limit value

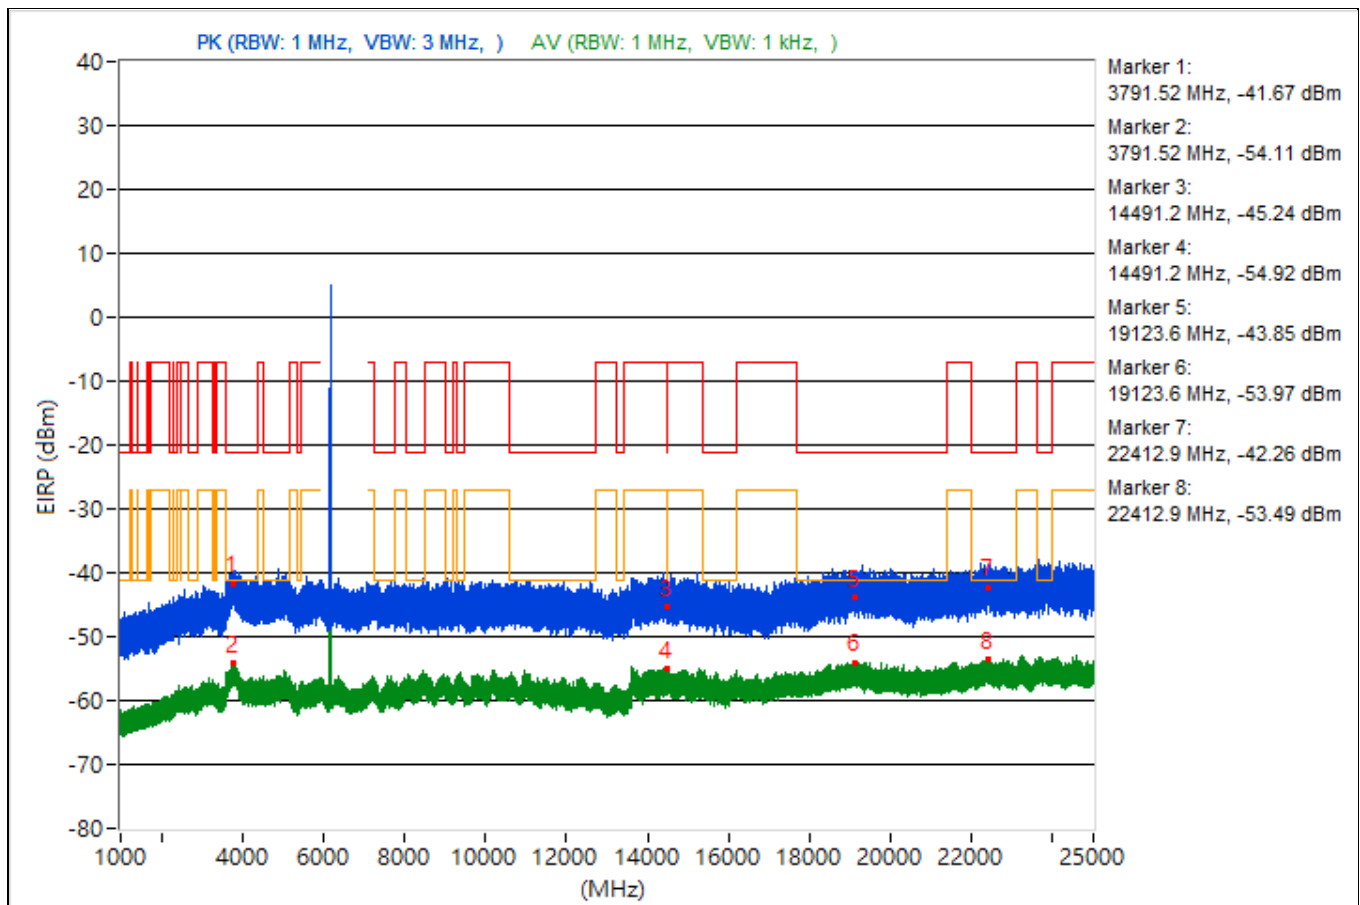


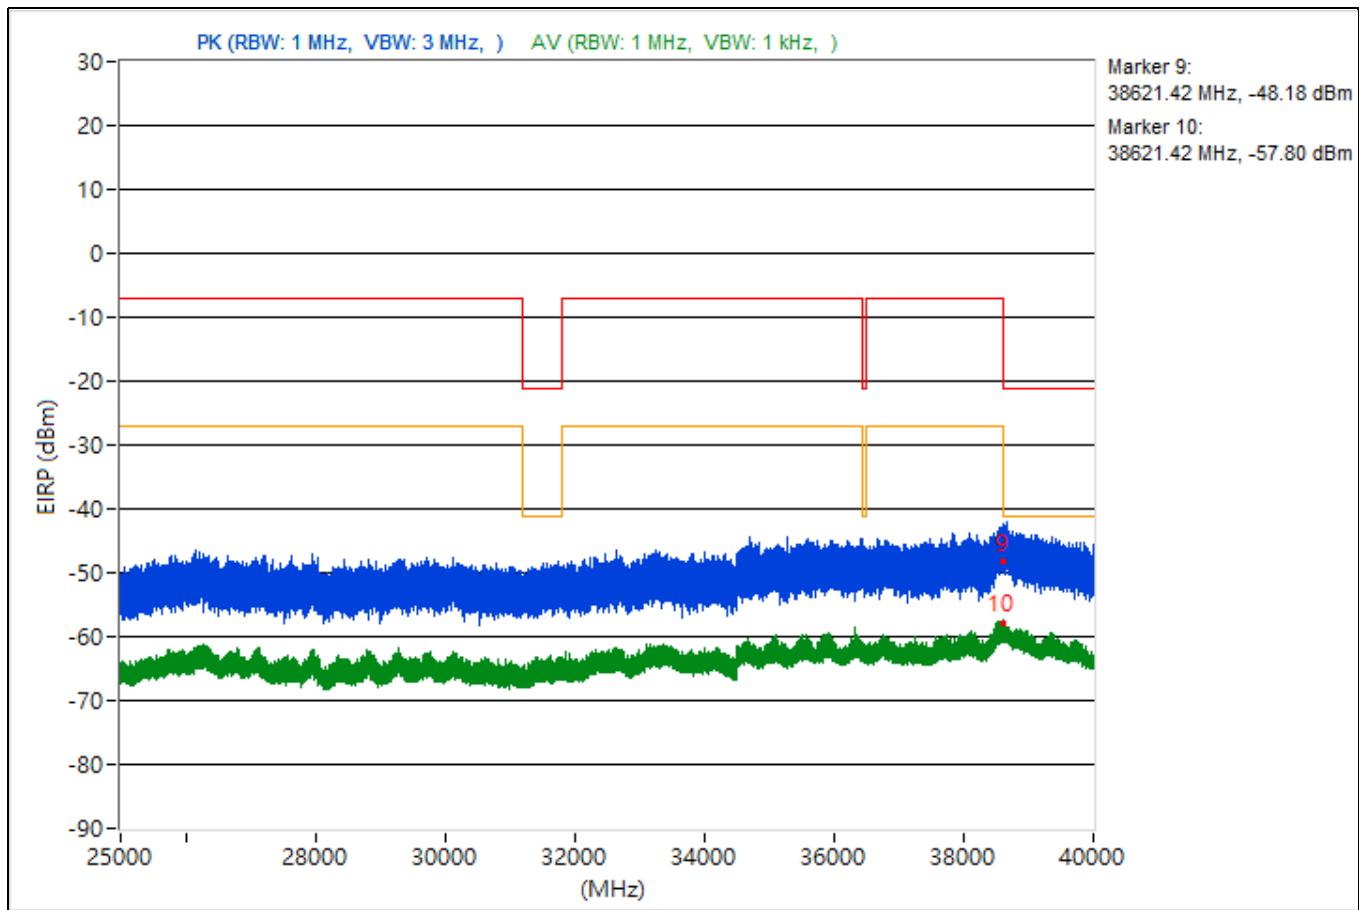


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3749.29	51.68 PK	74	-22.32	-54.05	-55.04	7.93	-43.58
2	3749.29	40.47 AV	54	-13.53	-64.26	-67.98	7.93	-54.79
3	14483.38	53.14 PK	74	-20.86	-51.49	-55.54	7.93	-42.12
4	14483.38	40.26 AV	54	-13.74	-67.53	-64.78	7.93	-55
5	19170	52.17 PK	74	-21.83	-54.72	-53.44	7.93	-43.09
6	19170	40.88 AV	54	-13.12	-67.76	-63.77	7.93	-54.38
7	22395	51.88 PK	74	-22.12	-53.03	-56.17	7.93	-43.38
8	22395	42.44 AV	54	-11.56	-62.75	-65.08	7.93	-52.82
9	38648.44	48.8 PK	74	-25.2	-57.47	-57.34	7.93	-46.46
10	38648.44	37.37 AV	54	-16.63	-67.68	-70.4	7.93	-57.89

Note: Margin value = Emission Level - Limit value

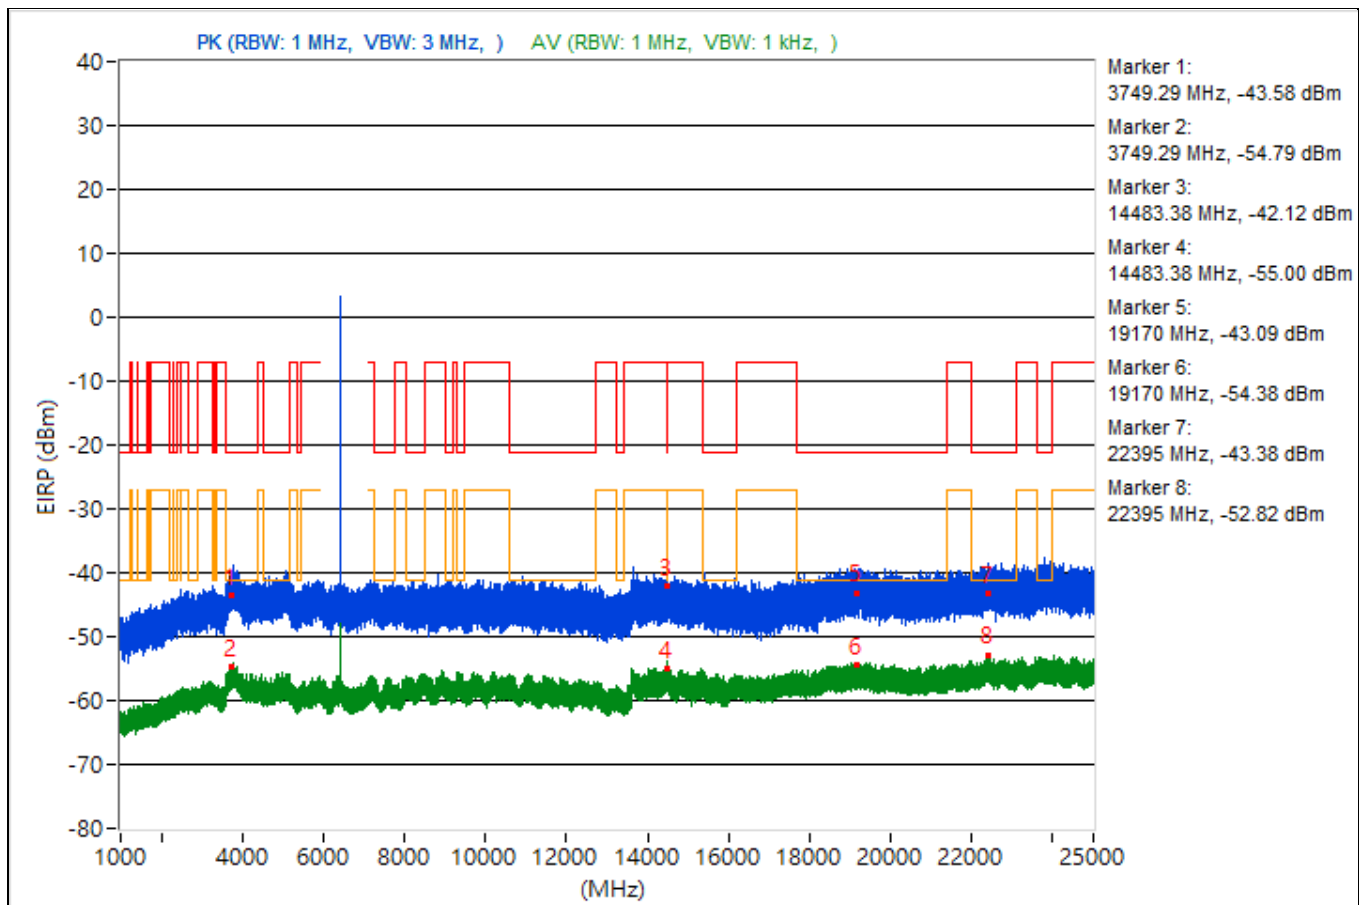


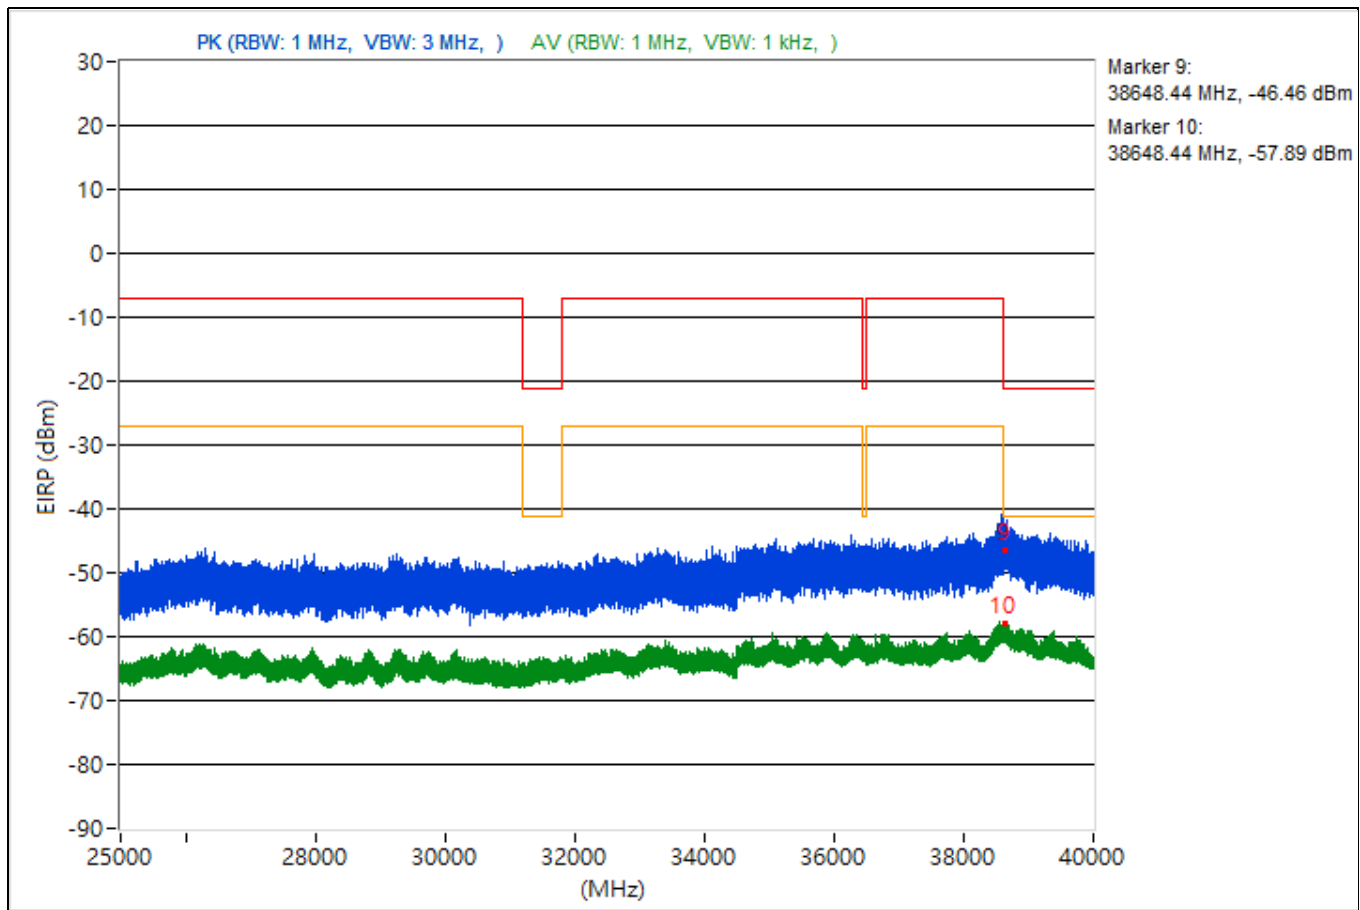


RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3843.63	53.55 PK	74	-20.45	-51.84	-53.66	7.93	-41.71
2	3843.63	40.79 AV	54	-13.21	-64.26	-66.98	7.93	-54.47
3	15401.78	51.81 PK	74	-22.19	-53.06	-56.31	7.93	-43.45
4	15401.78	39.53 AV	54	-14.47	-65.38	-68.52	7.93	-55.73
5	19151.8	54.05 PK	74	-19.95	-55.2	-50.38	7.93	-41.21
6	19151.8	41.59 AV	54	-12.41	-63.76	-65.67	7.93	-53.67
7	22440.3	52.84 PK	74	-21.16	-52.95	-53.81	7.93	-42.42
8	22440.3	41.75 AV	54	-12.25	-63.05	-66.56	7.93	-53.51
9	38600.36	48.8 PK	74	-25.2	-56.8	-58.08	7.93	-46.46
10	38600.36	37.62 AV	54	-16.38	-70.66	-67.17	7.93	-57.64

Note: Margin value = Emission Level - Limit value

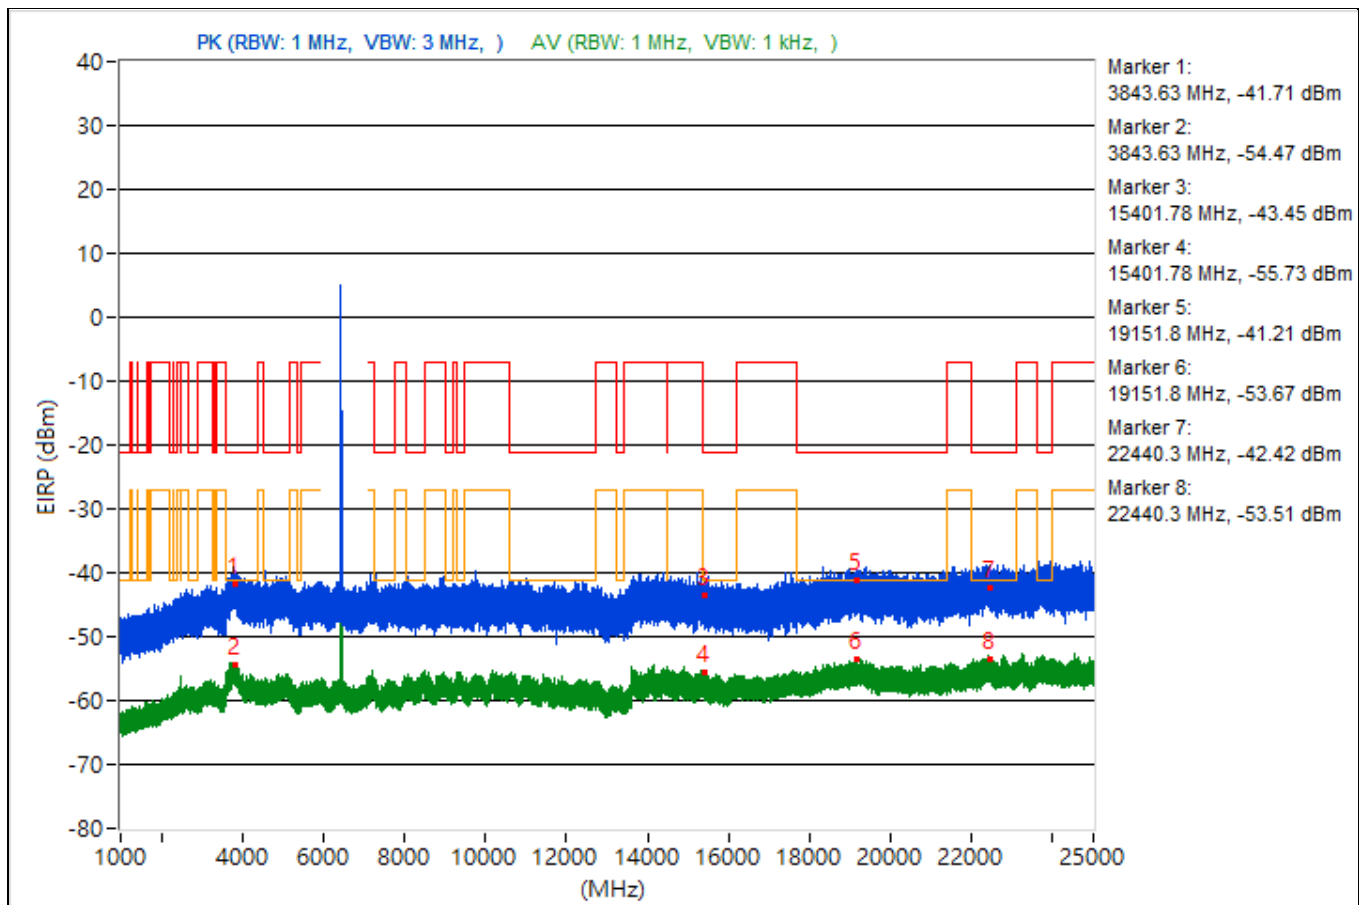


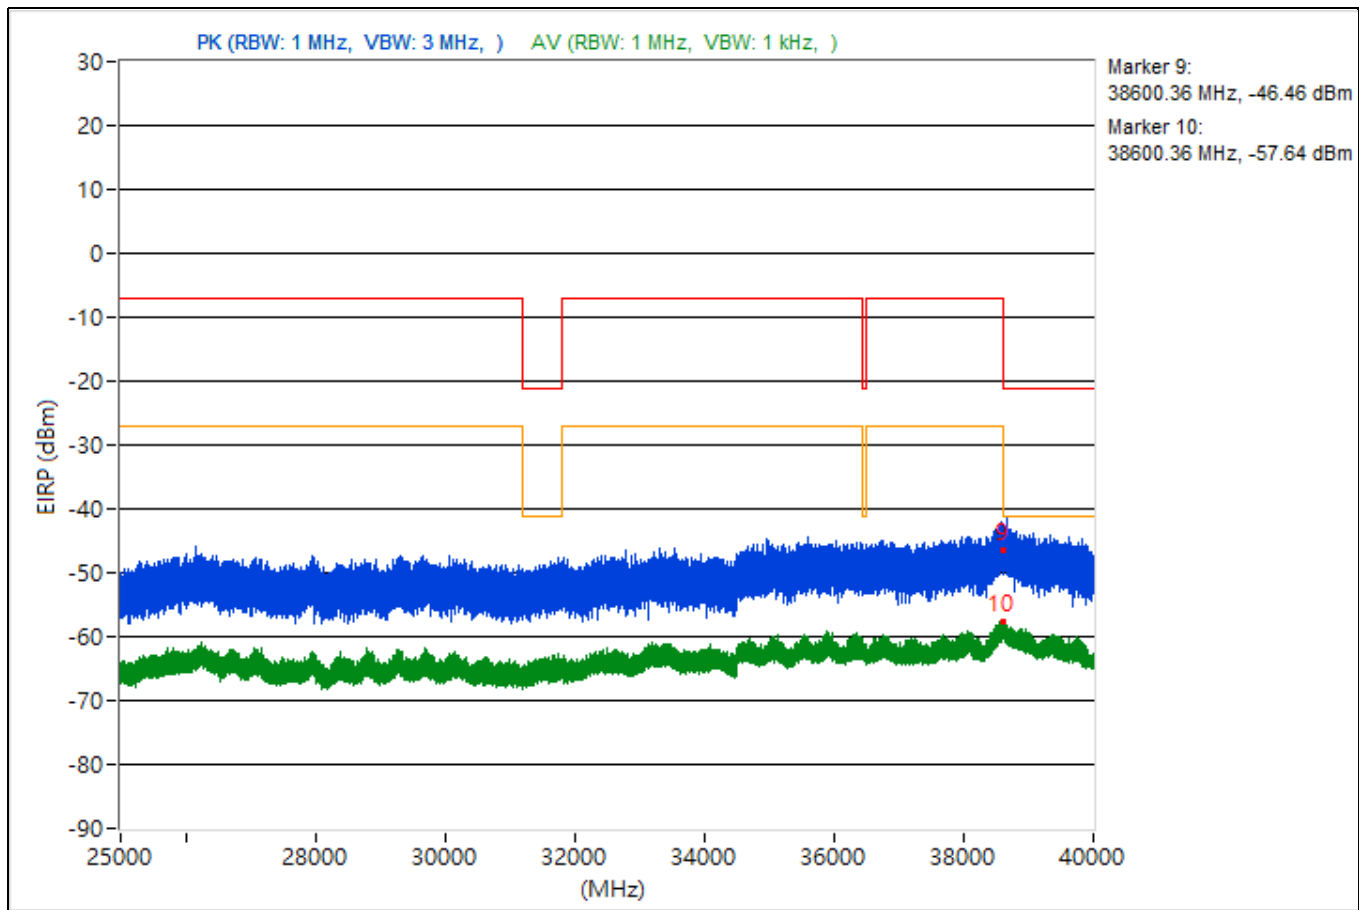


RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3787.4	51.3 PK	74	-22.7	-54.28	-55.64	7.93	-43.96
2	3787.4	41.19 AV	54	-12.81	-66.54	-63.89	7.93	-54.07
3	9357.42	51.89 PK	74	-22.11	-52.95	-56.31	7.93	-43.37
4	9357.42	39.69 AV	54	-14.31	-65.34	-68.11	7.93	-55.57
5	19166.1	52.4 PK	74	-21.6	-52.98	-54.82	7.93	-42.86
6	19166.1	41.51 AV	54	-12.49	-63.5	-66.32	7.93	-53.75
7	22385.4	53.9 PK	74	-20.1	-55.12	-50.61	7.93	-41.36
8	22385.4	42.02 AV	54	-11.98	-62.26	-67.7	7.93	-53.24
9	38608.53	48.33 PK	74	-25.67	-57.98	-57.76	7.93	-46.93
10	38608.53	36.78 AV	54	-17.22	-68.23	-71.06	7.93	-58.48

Note: Margin value = Emission Level - Limit value

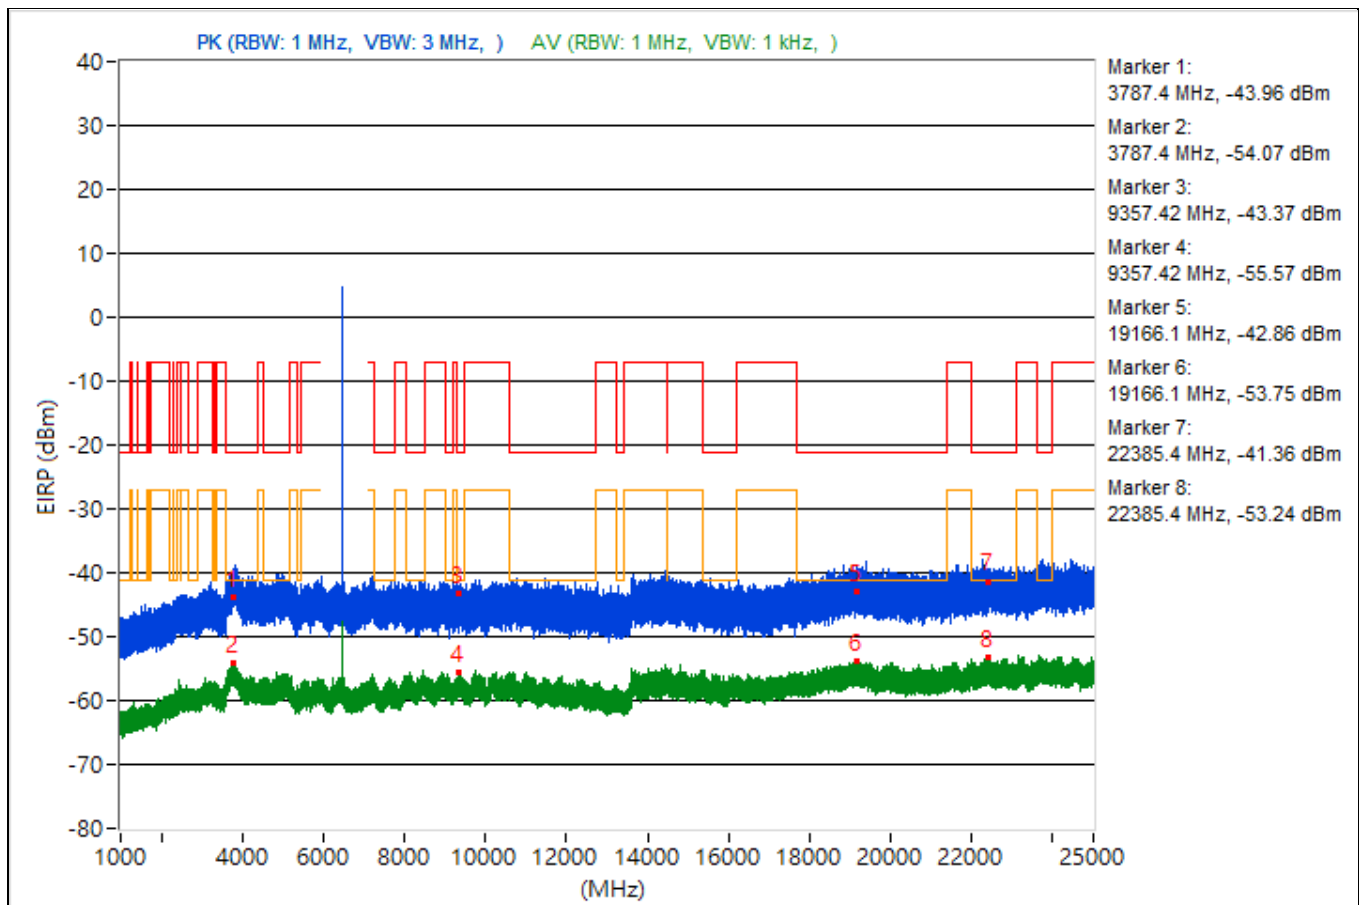


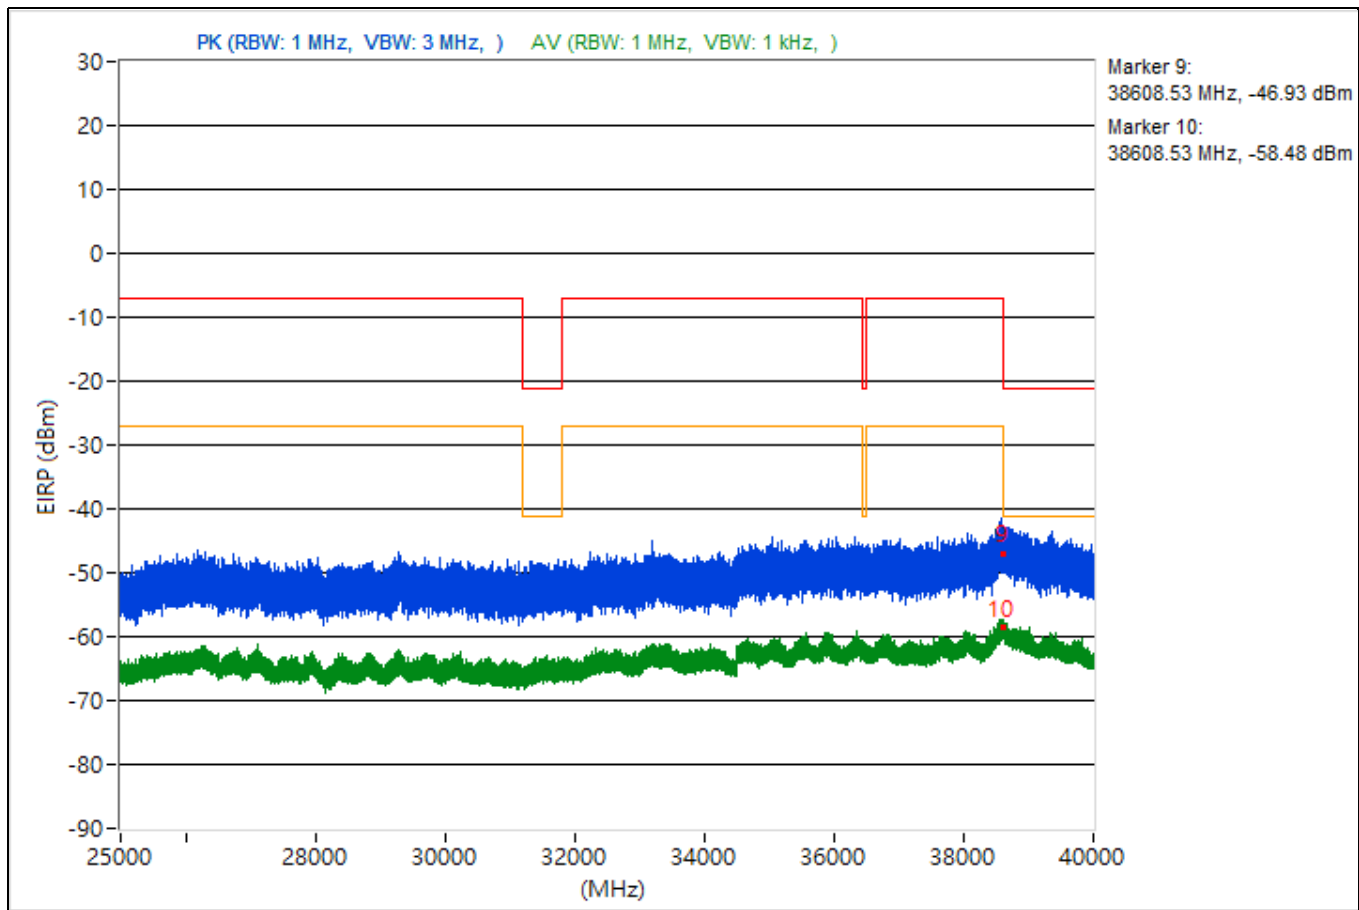


RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3730.86	53.34 PK	74	-20.66	-51.61	-54.63	7.93	-41.92
2	3730.86	40.86 AV	54	-13.14	-64.51	-66.36	7.93	-54.4
3	14472.44	52.61 PK	74	-21.39	-53.08	-54.16	7.93	-42.65
4	14472.44	40.48 AV	54	-13.52	-66.34	-65.19	7.93	-54.78
5	18981.1	53.57 PK	74	-20.43	-55.71	-50.85	7.93	-41.69
6	18981.1	40.94 AV	54	-13.06	-63.89	-67.26	7.93	-54.32
7	23627.7	54.2 PK	74	-19.8	-53.74	-50.76	7.93	-41.06
8	23627.7	42.2 AV	54	-11.8	-62.41	-66.54	7.93	-53.06
9	38606.84	48.49 PK	74	-25.51	-56.51	-59.4	7.93	-46.77
10	38606.84	37.94 AV	54	-16.06	-67.02	-70	7.93	-57.32

Note: Margin value = Emission Level - Limit value

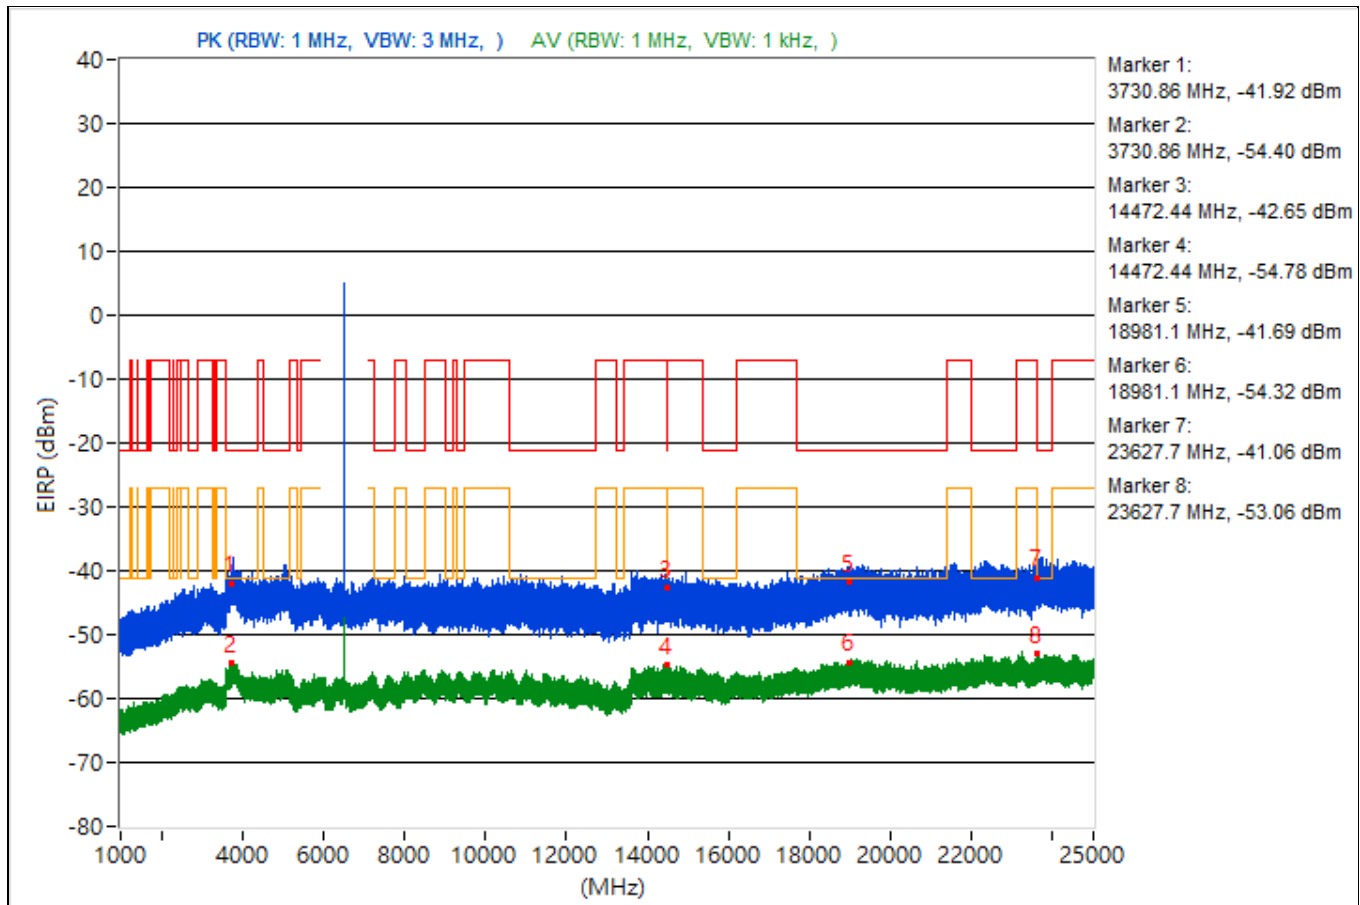


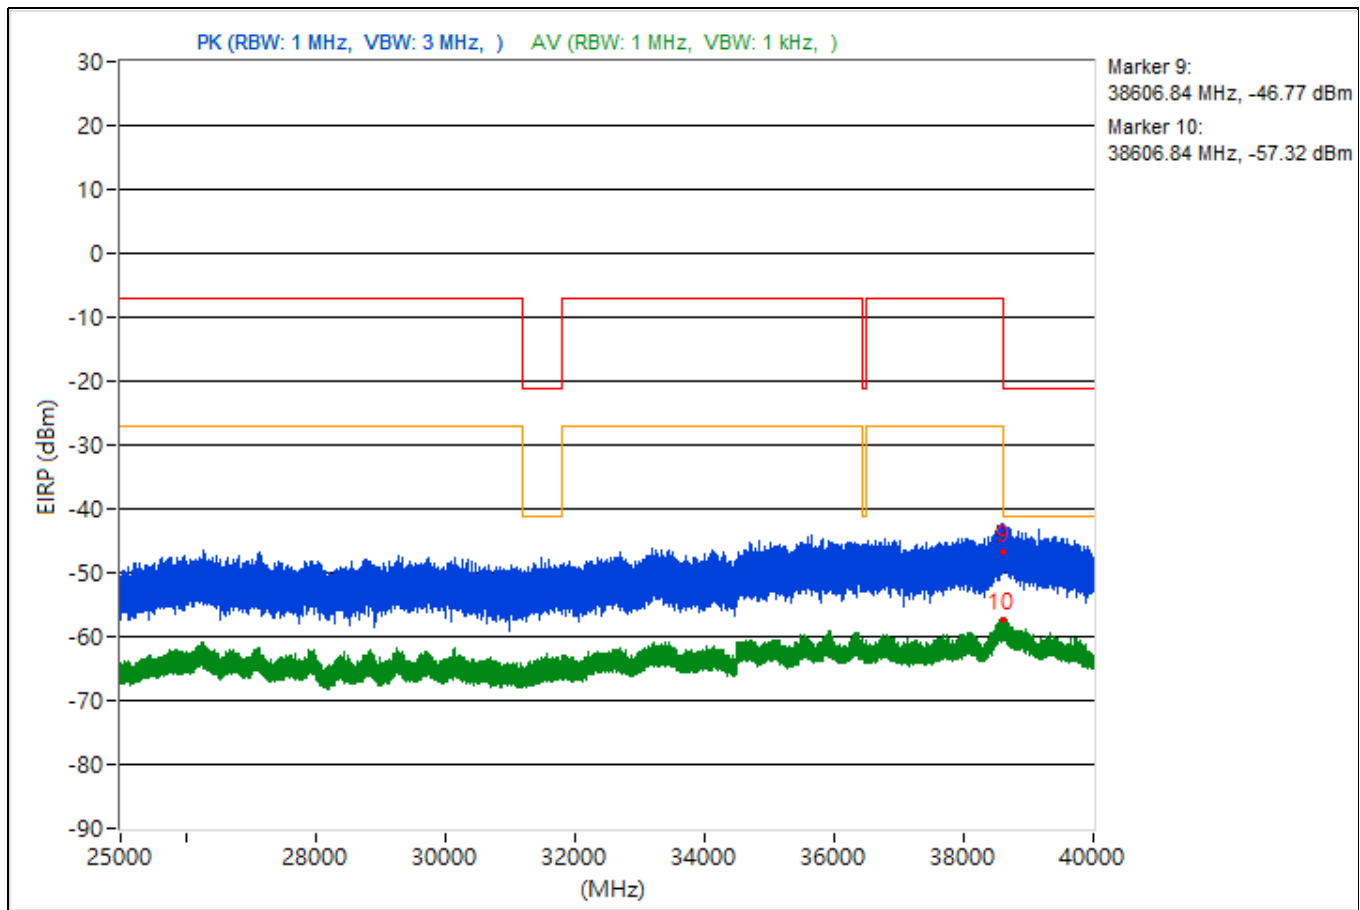


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3830.41	52.84 PK	74	-21.16	-54.73	-52.32	7.93	-42.42
2	3830.41	41.36 AV	54	-12.64	-64.21	-65.58	7.93	-53.9
3	9359.11	51.8 PK	74	-22.2	-56.14	-53.16	7.93	-43.46
4	9359.11	39.85 AV	54	-14.15	-68.03	-65.14	7.93	-55.41
5	18972	50.95 PK	74	-23.05	-54.01	-56.99	7.93	-44.31
6	18972	41.37 AV	54	-12.63	-65.92	-63.97	7.93	-53.89
7	23720.1	53.07 PK	74	-20.93	-51.69	-55.3	7.93	-42.19
8	23720.1	42.33 AV	54	-11.67	-62.81	-65.27	7.93	-52.93
9	38603.38	49 PK	74	-25	-56.19	-58.5	7.93	-46.26
10	38603.38	37.28 AV	54	-16.72	-67.58	-70.87	7.93	-57.98

Note: Margin value = Emission Level - Limit value

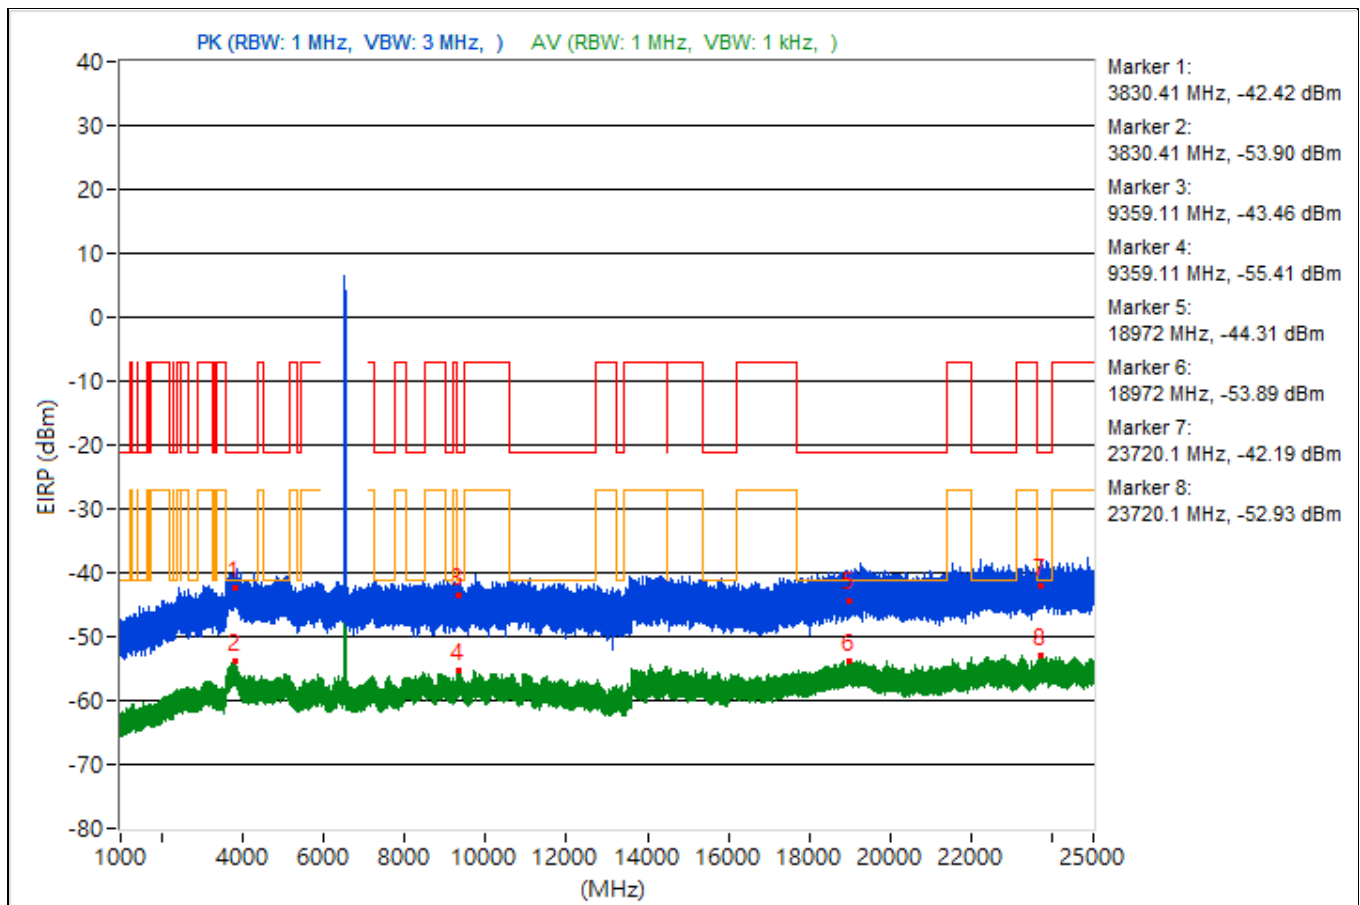


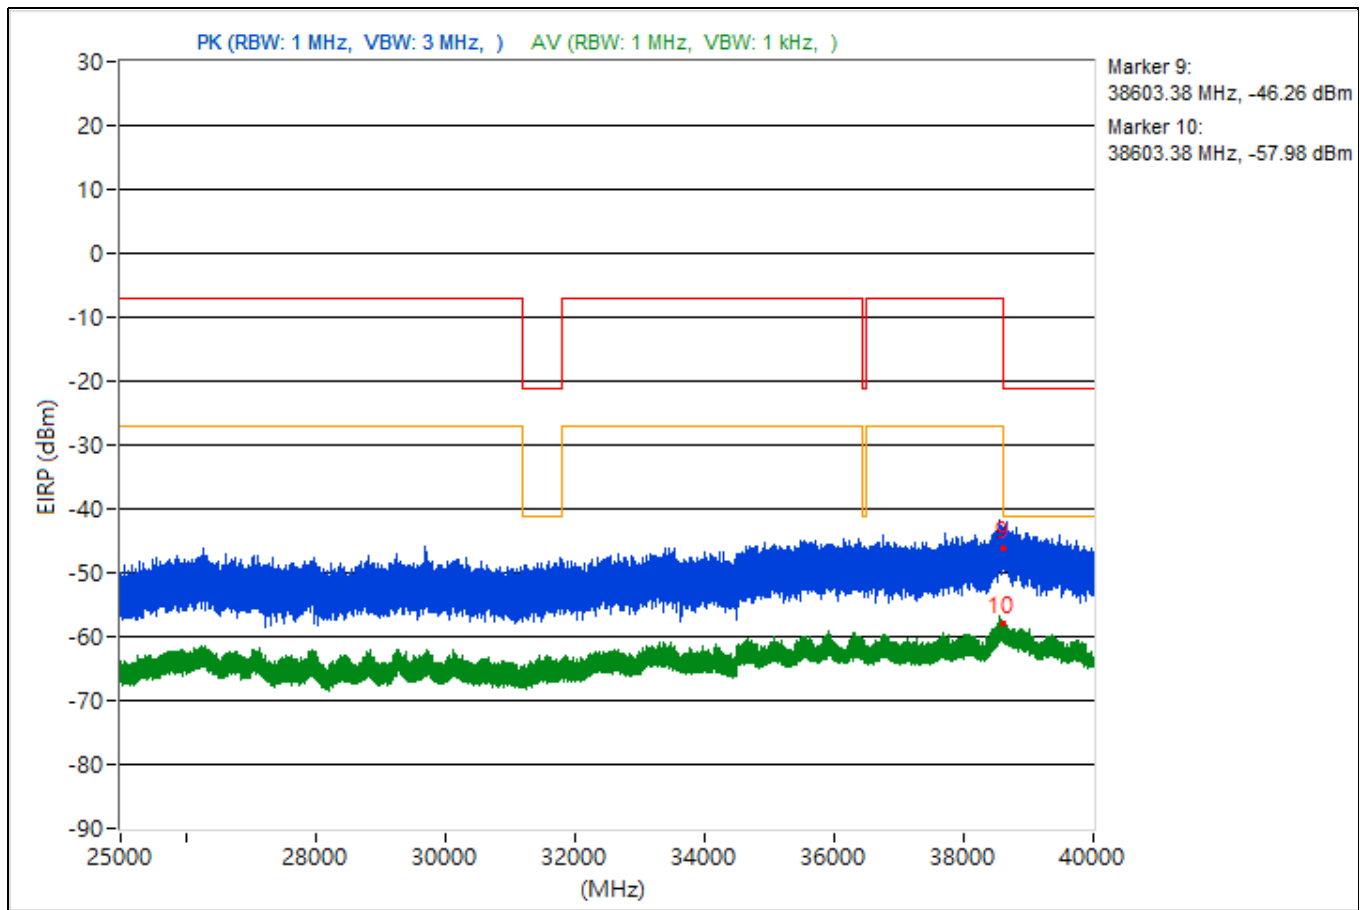


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3723.39	54.18 PK	74	-19.82	-51.28	-52.92	7.93	-41.08
2	3723.39	40.59 AV	54	-13.41	-64.1	-67.96	7.93	-54.67
3	14497.6	51.8 PK	74	-22.2	-54.59	-54.21	7.93	-43.46
4	14497.6	39.66 AV	54	-14.34	-69.19	-64.9	7.93	-55.6
5	19076.1	52.72 PK	74	-21.28	-55.19	-52.26	7.93	-42.54
6	19076.1	41.03 AV	54	-12.97	-63.59	-67.66	7.93	-54.23
7	23836.4	53.45 PK	74	-20.55	-51.82	-53.92	7.93	-41.81
8	23836.4	42.61 AV	54	-11.39	-62.35	-65.33	7.93	-52.65
9	38611.82	47.75 PK	74	-26.25	-59.69	-57.49	7.93	-47.51
10	38611.82	37.79 AV	54	-16.21	-70.83	-66.87	7.93	-57.47

Note: Margin value = Emission Level - Limit value

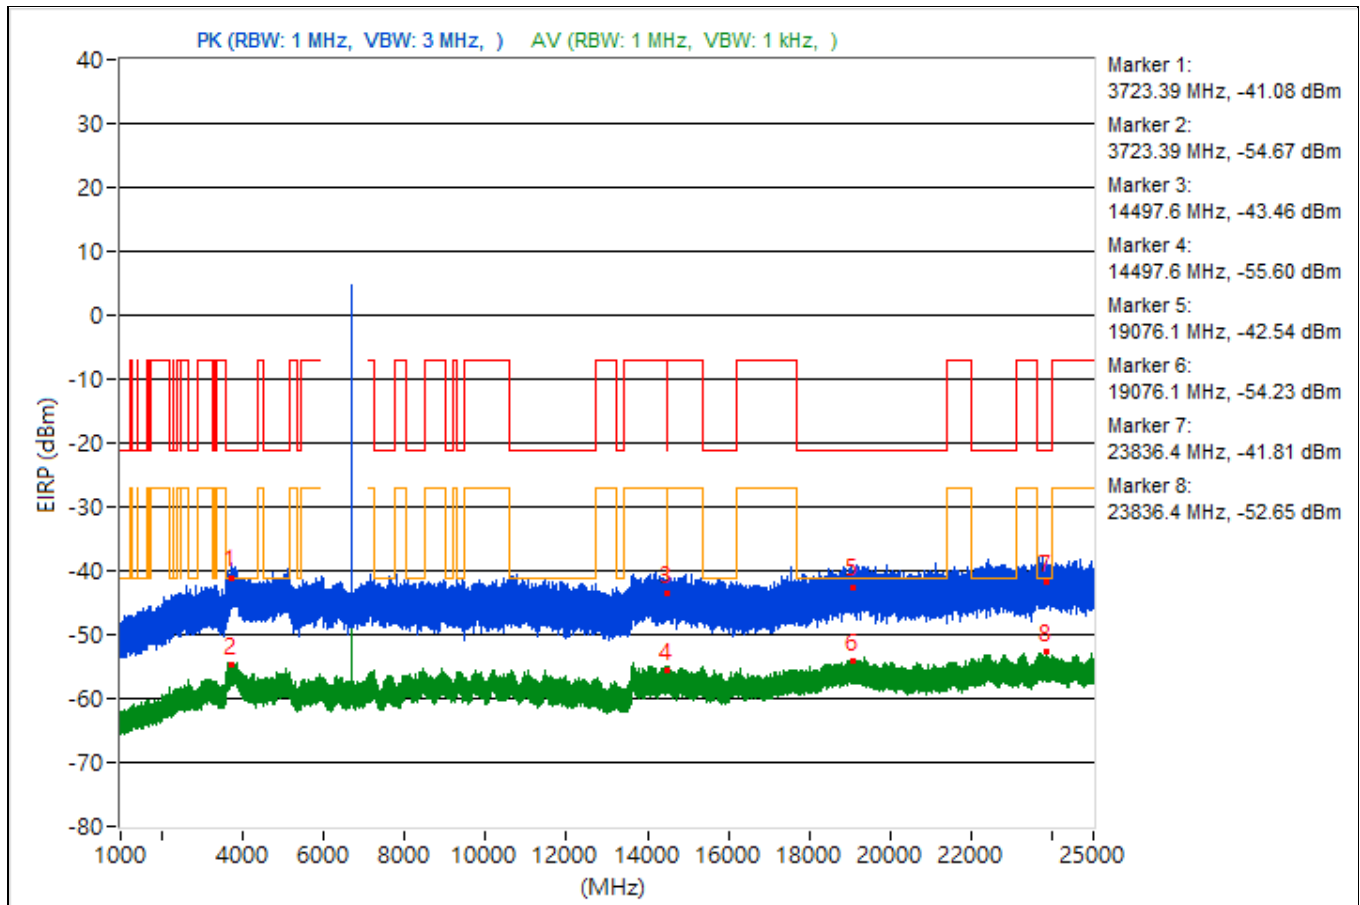


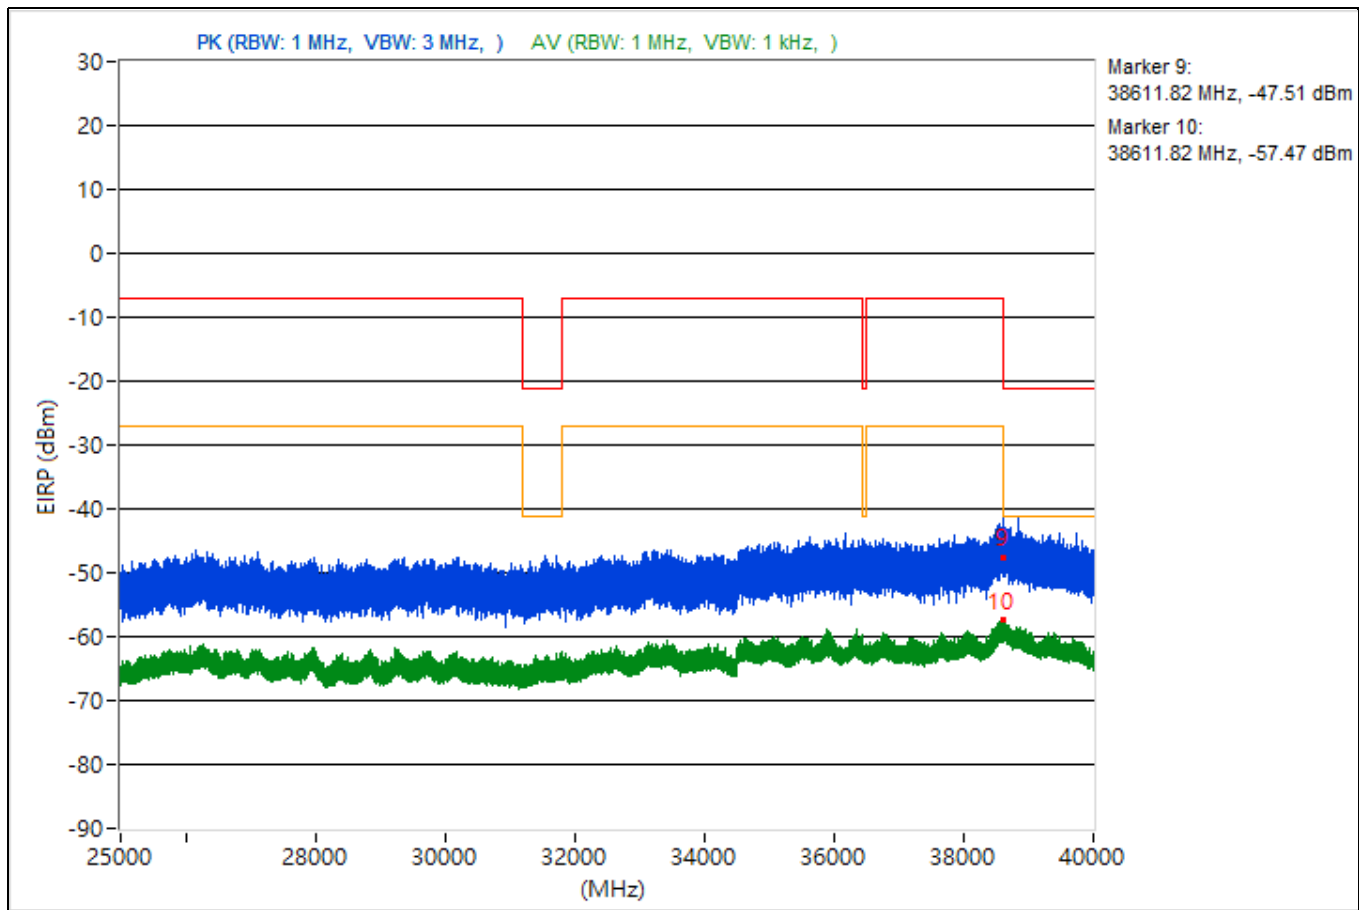


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3835.62	55.22 PK	74	-18.78	-52.02	-50.14	7.93	-40.04
2	3835.62	41.8 AV	54	-12.2	-64.94	-63.92	7.93	-53.46
3	14487.11	50.86 PK	74	-23.14	-54.47	-56.43	7.93	-44.4
4	14487.11	40.26 AV	54	-13.74	-66.87	-65.18	7.93	-55
5	19366	51.38 PK	74	-22.62	-55	-54.64	7.93	-43.88
6	19366	41.72 AV	54	-12.28	-65.33	-63.77	7.93	-53.54
7	22311.5	51.39 PK	74	-22.61	-53.47	-56.78	7.93	-43.87
8	22311.5	41.81 AV	54	-12.19	-65.94	-63.25	7.93	-53.45
9	38658.13	48.61 PK	74	-25.39	-59.23	-56.41	7.93	-46.65
10	38658.13	37.51 AV	54	-16.49	-67.49	-70.35	7.93	-57.75

Note: Margin value = Emission Level - Limit value

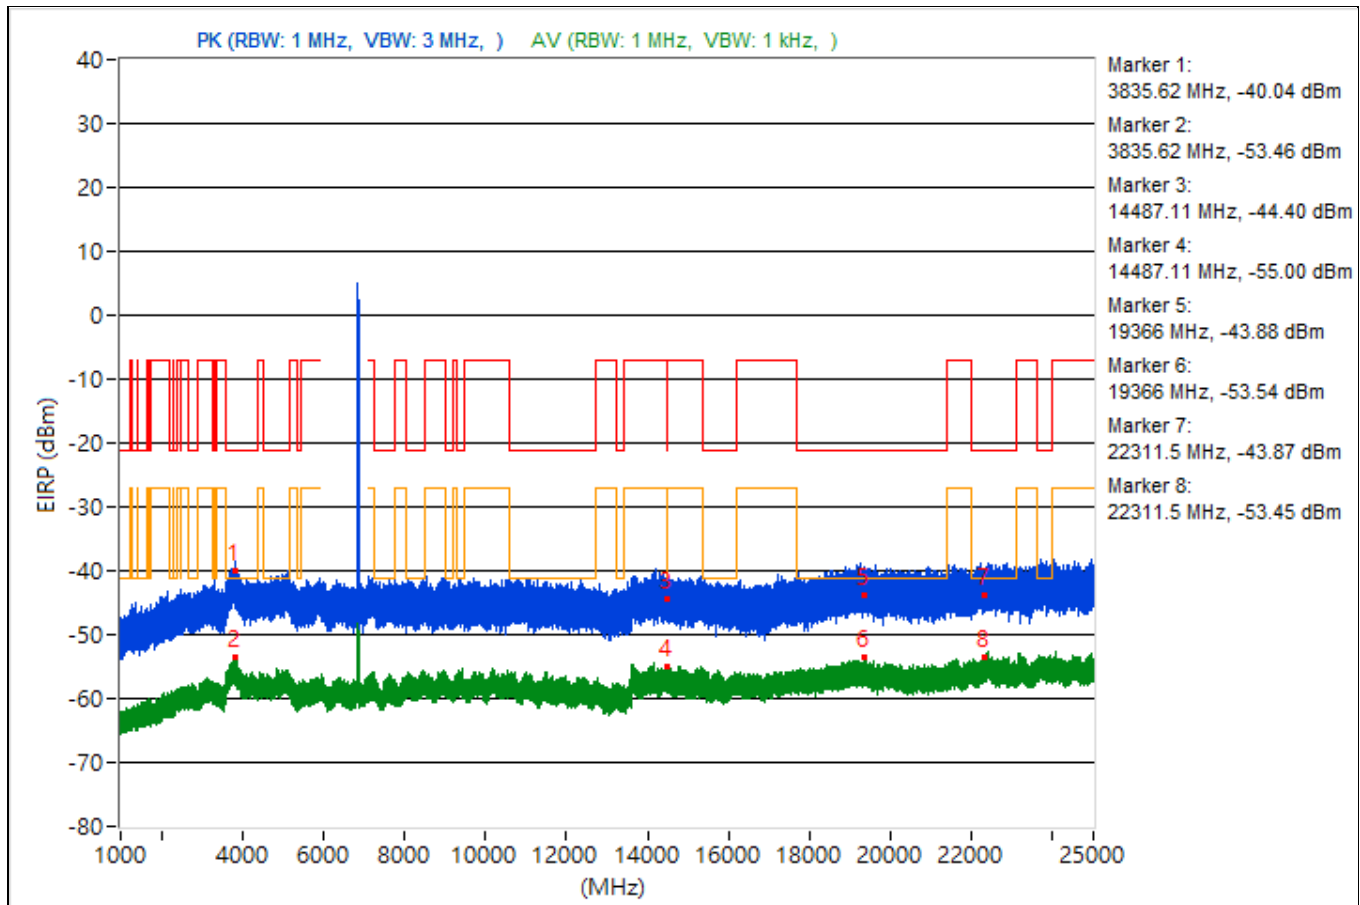


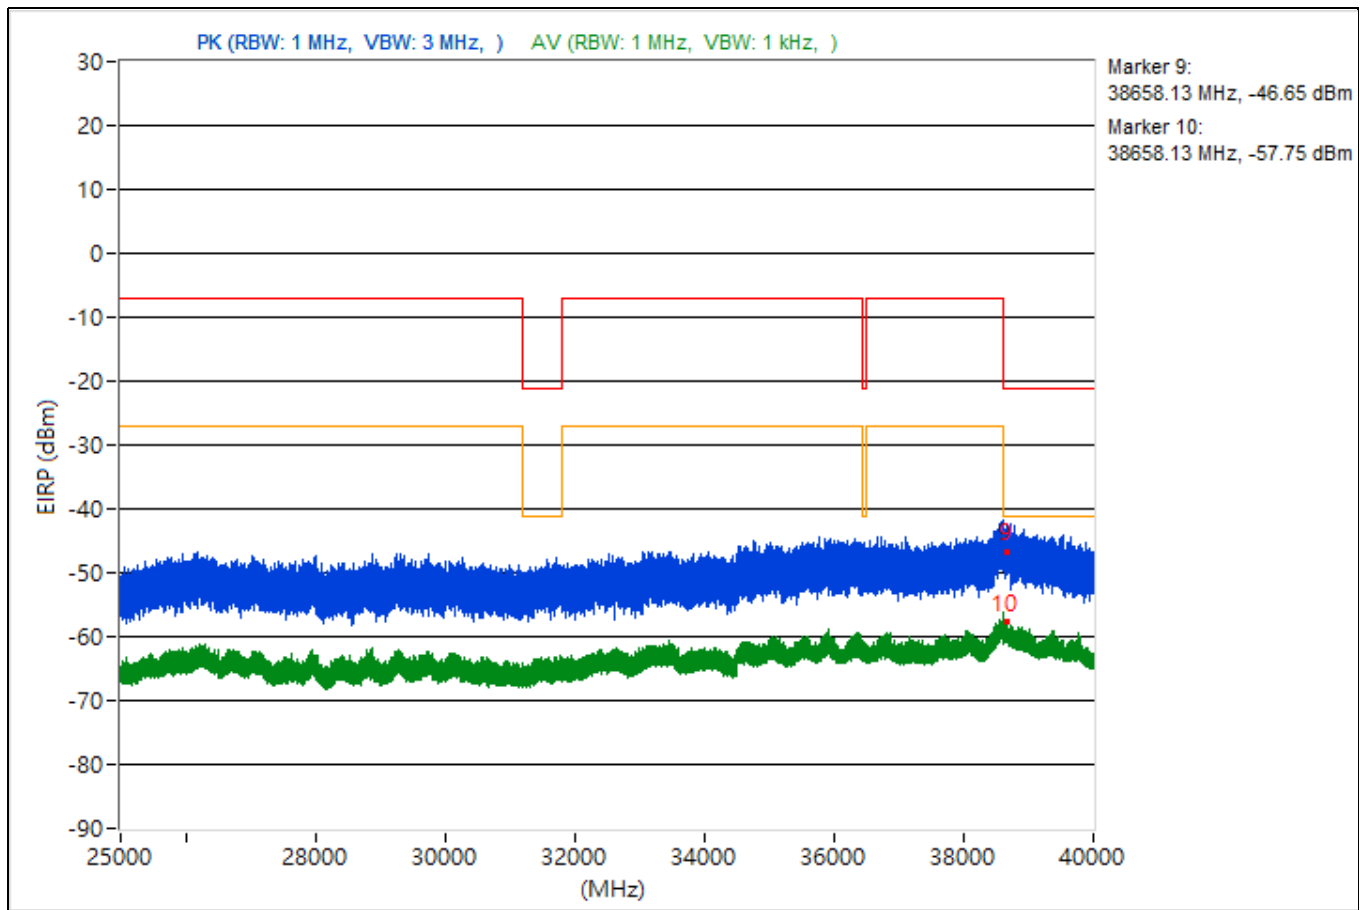


RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3750.61	53.96 PK	74	-20.04	-53.46	-51.28	7.93	-41.3
2	3750.61	40.97 AV	54	-13.03	-64.62	-65.93	7.93	-54.29
3	11038.31	49.41 PK	74	-24.59	-56.27	-57.37	7.93	-45.85
4	11038.31	39.08 AV	54	-14.92	-70.4	-65.27	7.93	-56.18
5	18767.5	49.66 PK	74	-24.34	-56.39	-56.69	7.93	-45.6
6	18767.5	41.18 AV	54	-12.82	-67.05	-63.64	7.93	-54.08
7	22404.4	54.04 PK	74	-19.96	-50.76	-54.23	7.93	-41.22
8	22404.4	42 AV	54	-12	-65.72	-63.08	7.93	-53.26
9	38611.82	50.48 PK	74	-23.52	-54.08	-58.41	7.93	-44.78
10	38611.82	37.55 AV	54	-16.45	-70.27	-67.47	7.93	-57.71

Note: Margin value = Emission Level - Limit value

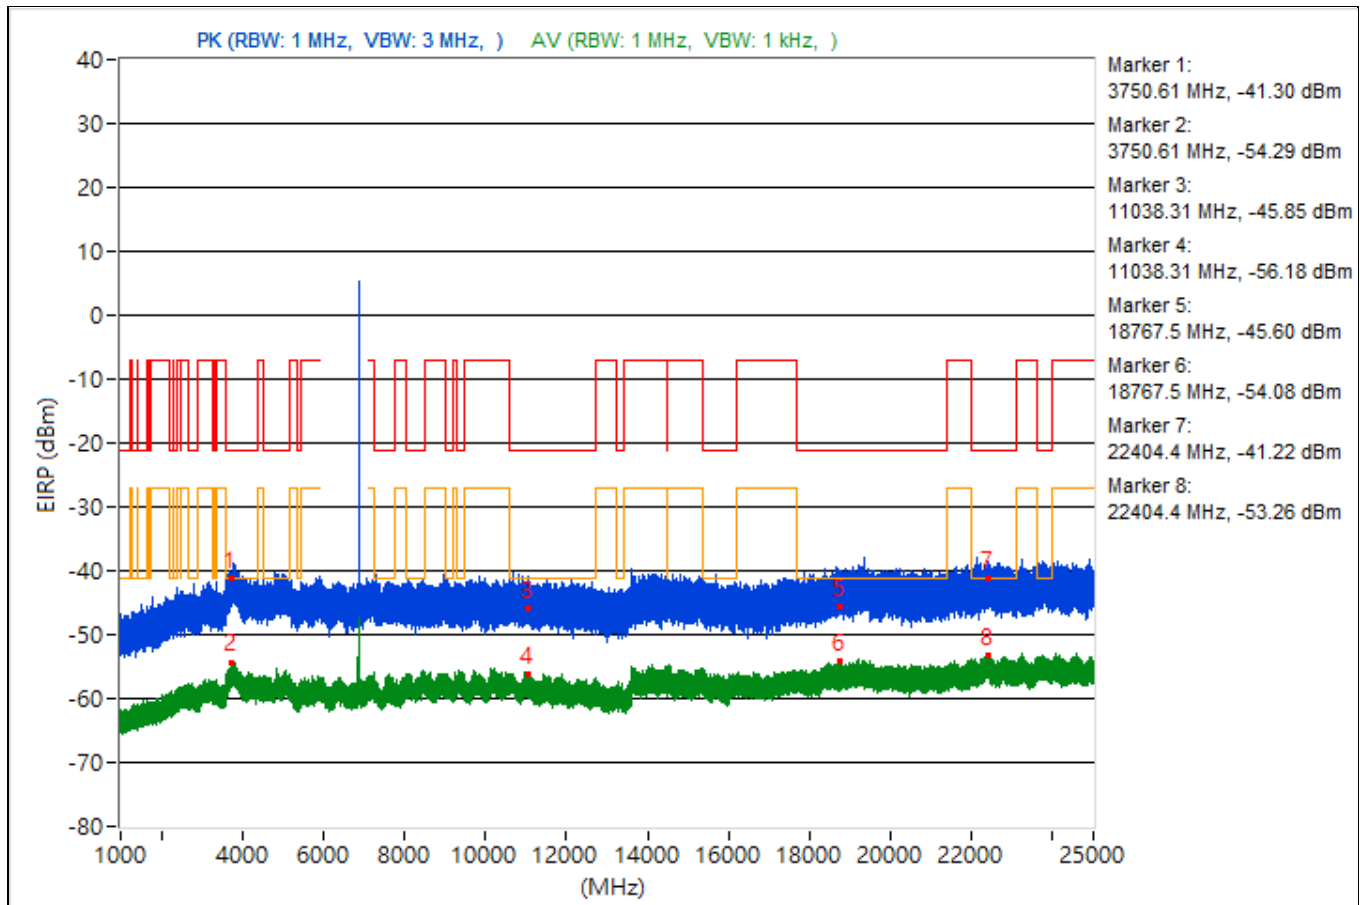


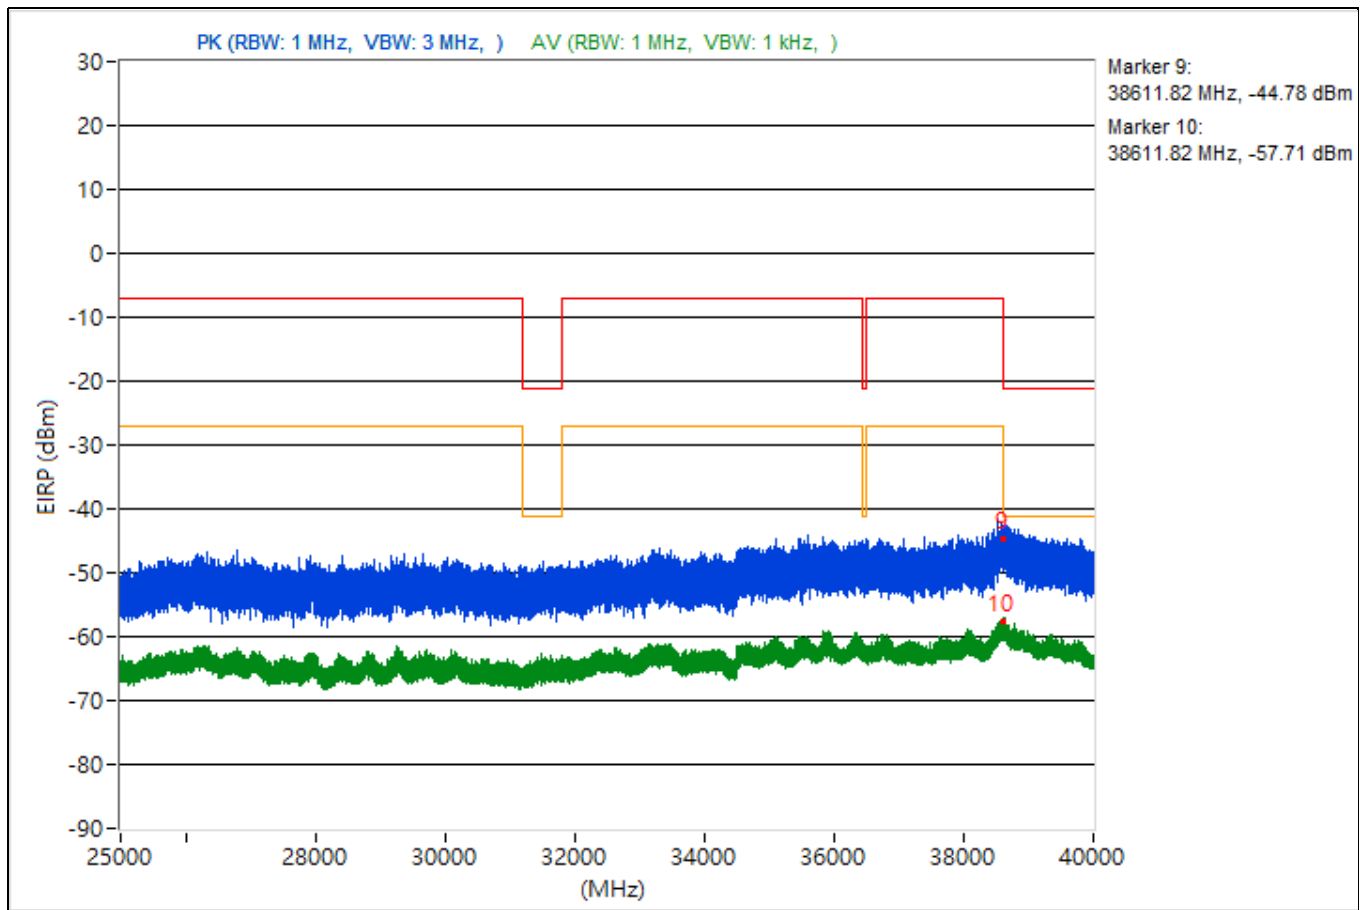


RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3742.52	51.32 PK	74	-22.68	-53.68	-56.54	7.93	-43.94
2	3742.52	40.54 AV	54	-13.46	-63.74	-69.19	7.93	-54.72
3	9343.91	50.11 PK	74	-23.89	-54.73	-58.07	7.93	-45.15
4	9343.91	39.82 AV	54	-14.18	-65.33	-67.77	7.93	-55.44
5	18933.6	54.55 PK	74	-19.45	-50.36	-53.5	7.93	-40.71
6	18933.6	41.19 AV	54	-12.81	-63.86	-66.57	7.93	-54.07
7	22445	54.7 PK	74	-19.3	-50.89	-52.21	7.93	-40.56
8	22445	41.95 AV	54	-12.05	-63.22	-65.6	7.93	-53.31
9	38615.29	49.67 PK	74	-24.33	-55.72	-57.52	7.93	-45.59
10	38615.29	38.19 AV	54	-15.81	-67.07	-69.21	7.93	-57.07

Note: Margin value = Emission Level - Limit value

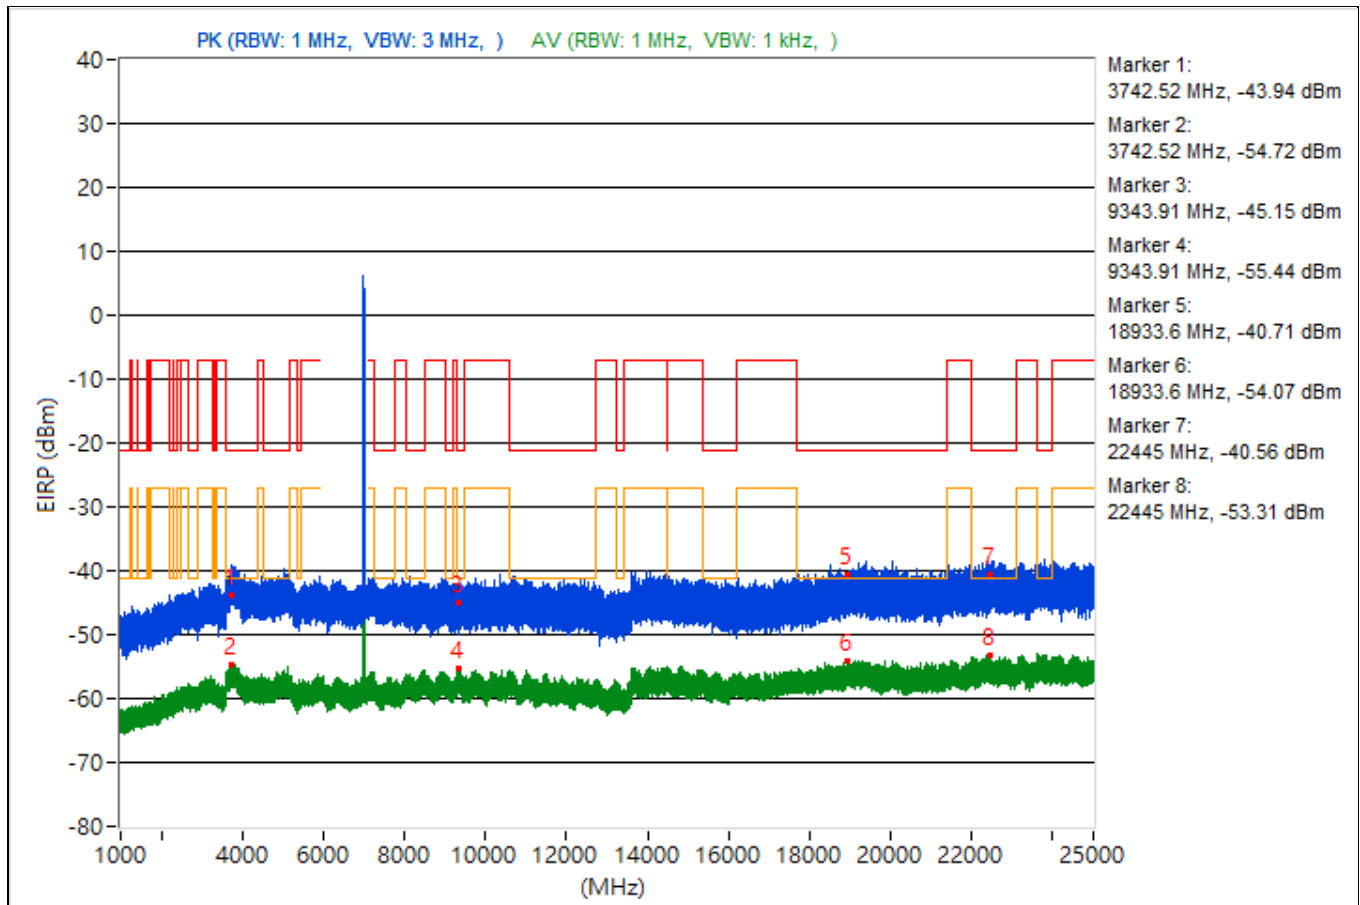


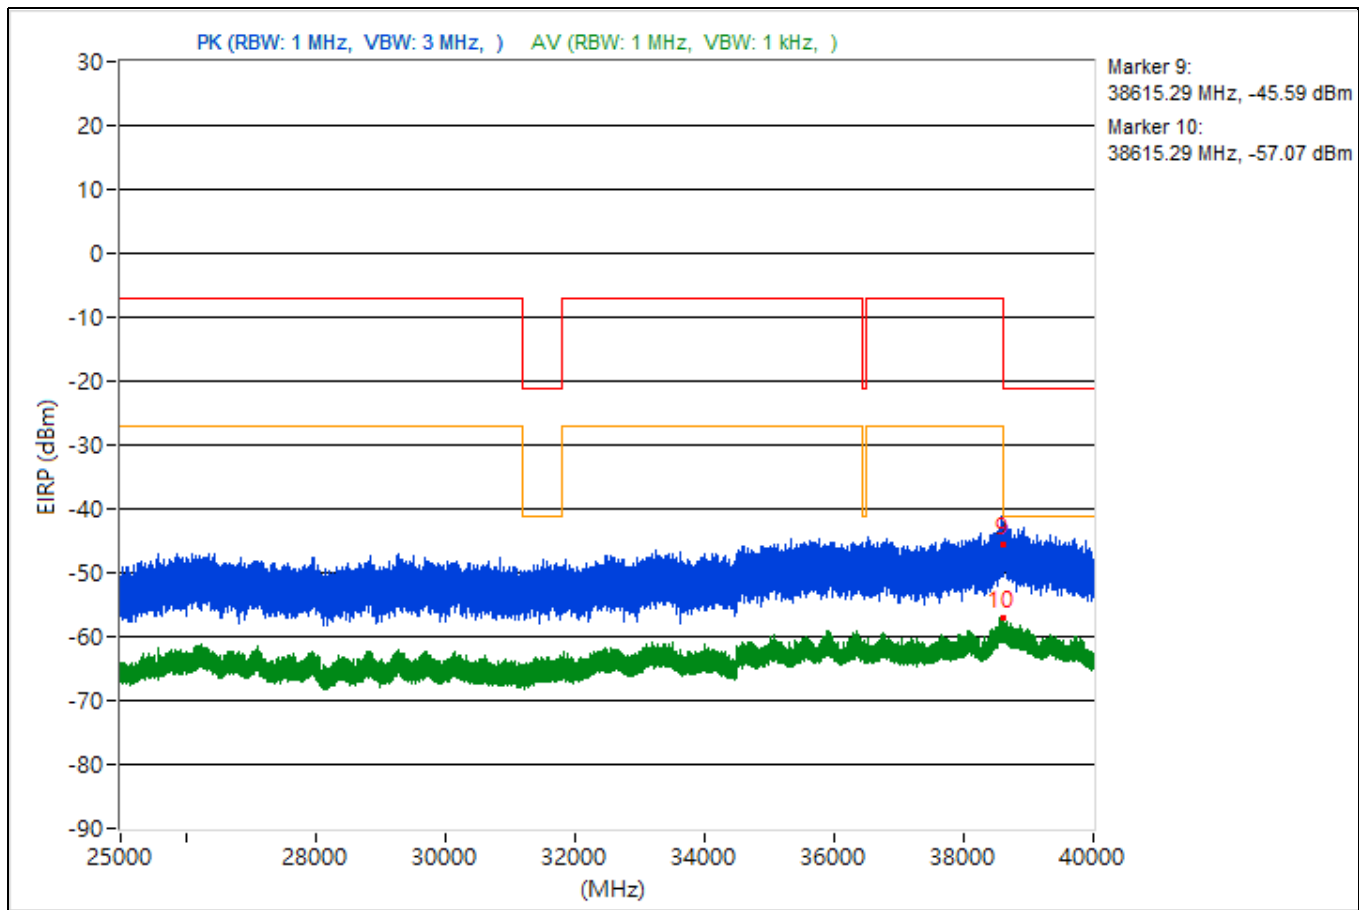


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3820.53	53.32 PK	74	-20.68	-52.92	-52.83	7.93	-41.94
2	3820.53	41.13 AV	54	-12.87	-65.94	-64.34	7.93	-54.13
3	14476.36	50.63 PK	74	-23.37	-55.52	-55.61	7.93	-44.63
4	14476.36	39.56 AV	54	-14.44	-65.15	-68.93	7.93	-55.7
5	19120.5	51.49 PK	74	-22.51	-55.3	-54.19	7.93	-43.77
6	19120.5	40.56 AV	54	-13.44	-64.03	-68.24	7.93	-54.7
7	23791.4	53.44 PK	74	-20.56	-52.27	-53.31	7.93	-41.82
8	23791.4	41.91 AV	54	-12.09	-66.27	-62.93	7.93	-53.35
9	38602.58	48.43 PK	74	-25.57	-57.69	-57.85	7.93	-46.83
10	38602.58	37.18 AV	54	-16.82	-71.39	-67.49	7.93	-58.08

Note: Margin value = Emission Level - Limit value

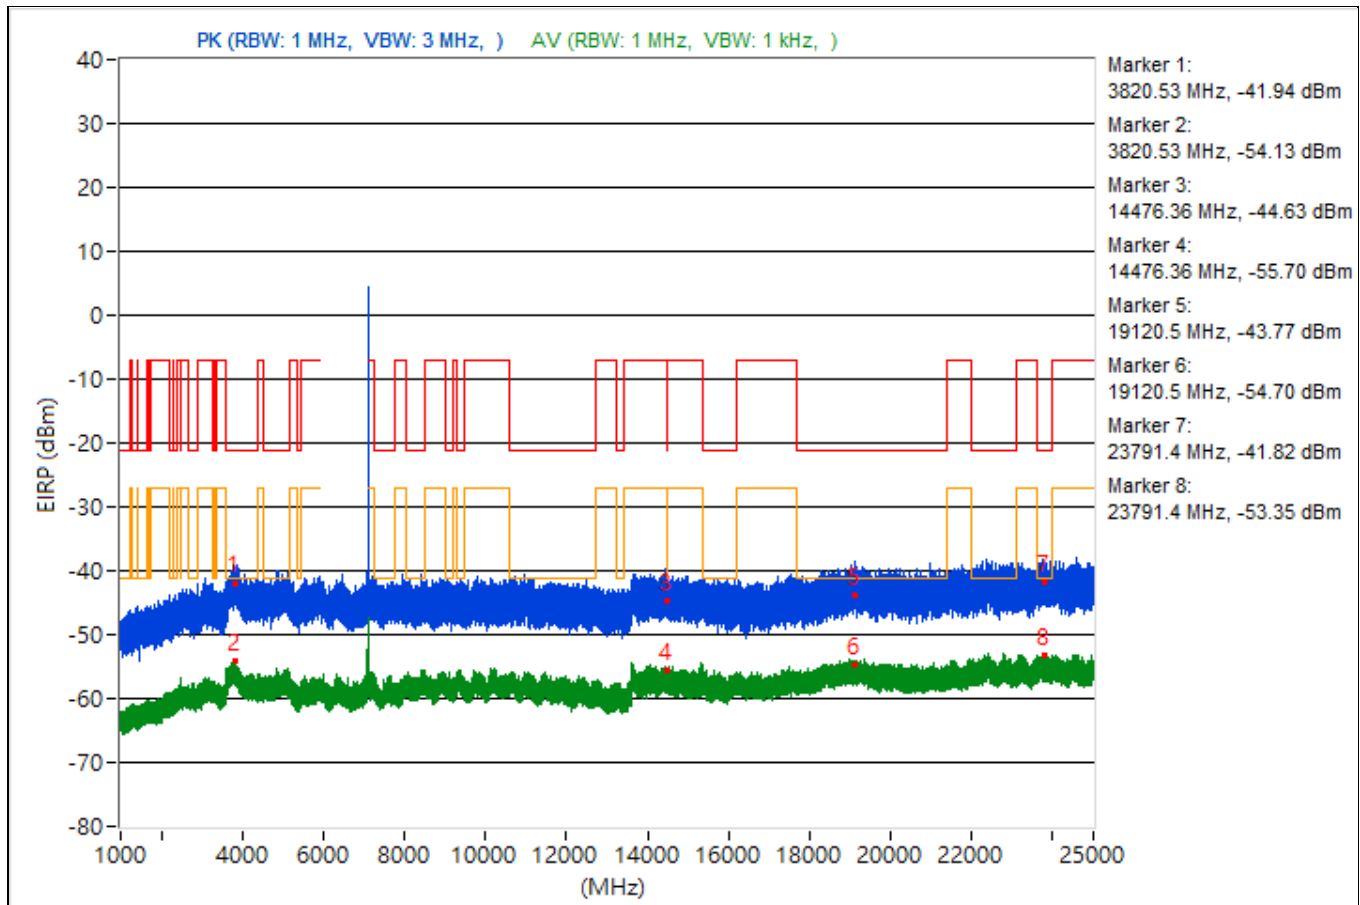


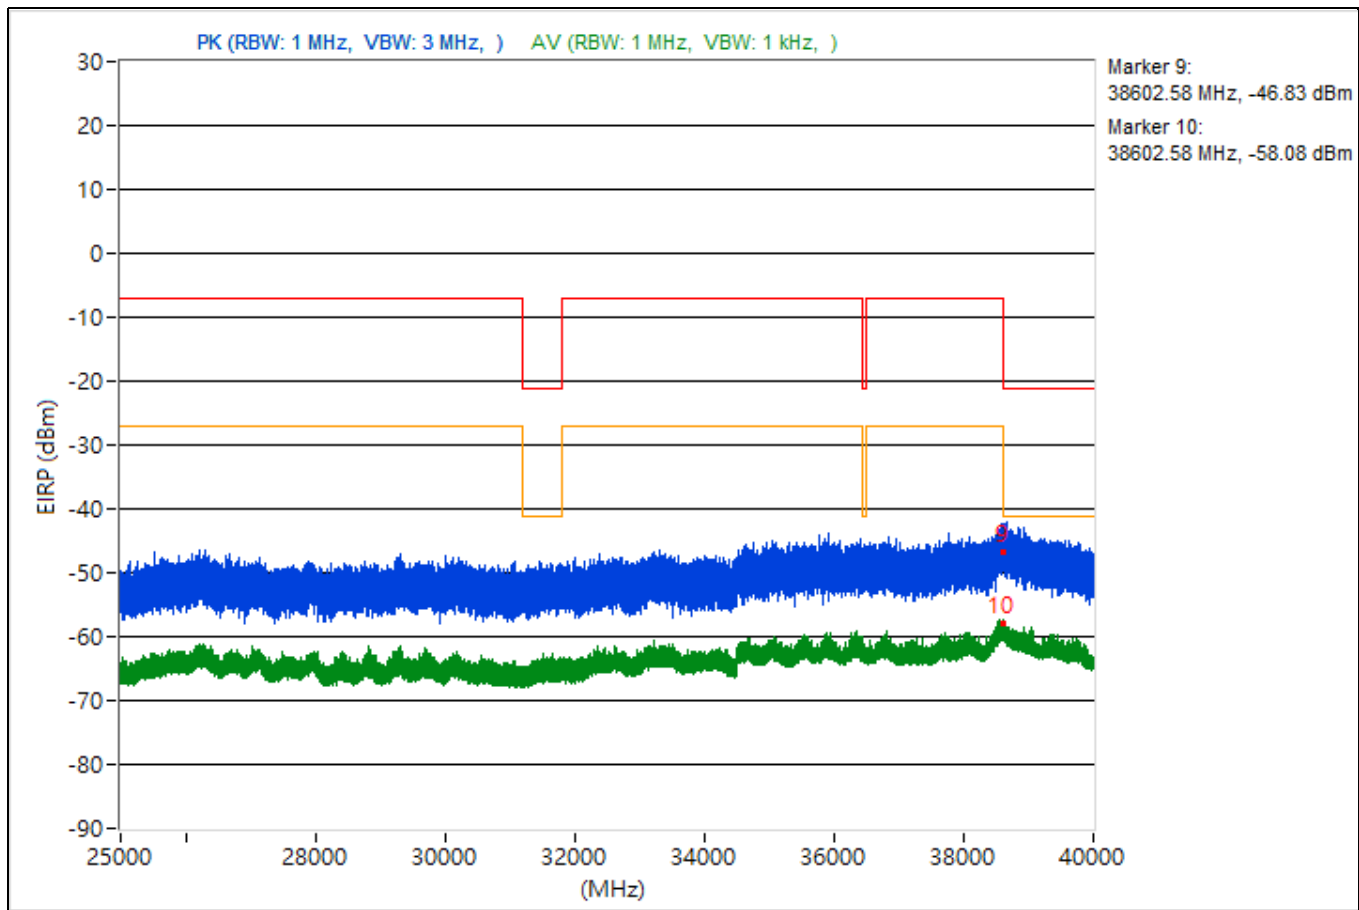


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3732.49	48.25 PK	74	-25.75	-55.16	-54.73	4.92	-47.01
2	3732.49	37.73 AV	54	-16.27	-67.34	-64.15	4.92	-57.53
3	8455.64	48.02 PK	74	-25.98	-55.1	-55.24	4.92	-47.24
4	8455.64	36.68 AV	54	-17.32	-65.46	-67.89	4.92	-58.58
5	19378	48.92 PK	74	-25.08	-56.62	-52.76	4.92	-46.34
6	19378	38.04 AV	54	-15.96	-63.42	-68.06	4.92	-57.22
7	23722.9	48.45 PK	74	-25.55	-54.32	-55.21	4.92	-46.81
8	23722.9	38.79 AV	54	-15.21	-62.88	-66.77	4.92	-56.47
9	38620.36	46.68 PK	74	-27.32	-56.86	-56.18	4.92	-48.58
10	38620.36	34.48 AV	54	-19.52	-70.64	-67.38	4.92	-60.78

Note: Margin value = Emission Level - Limit value

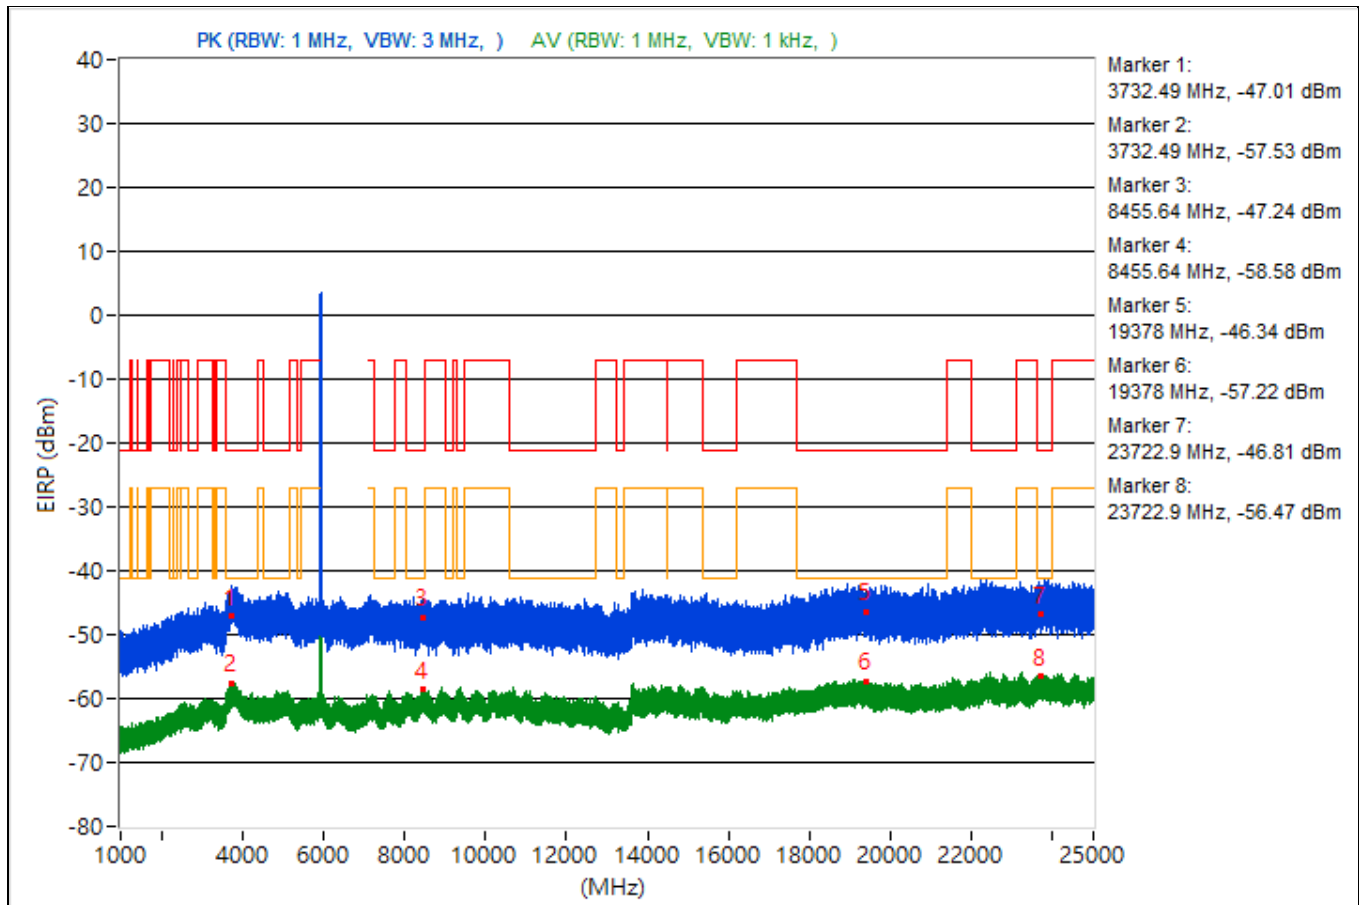


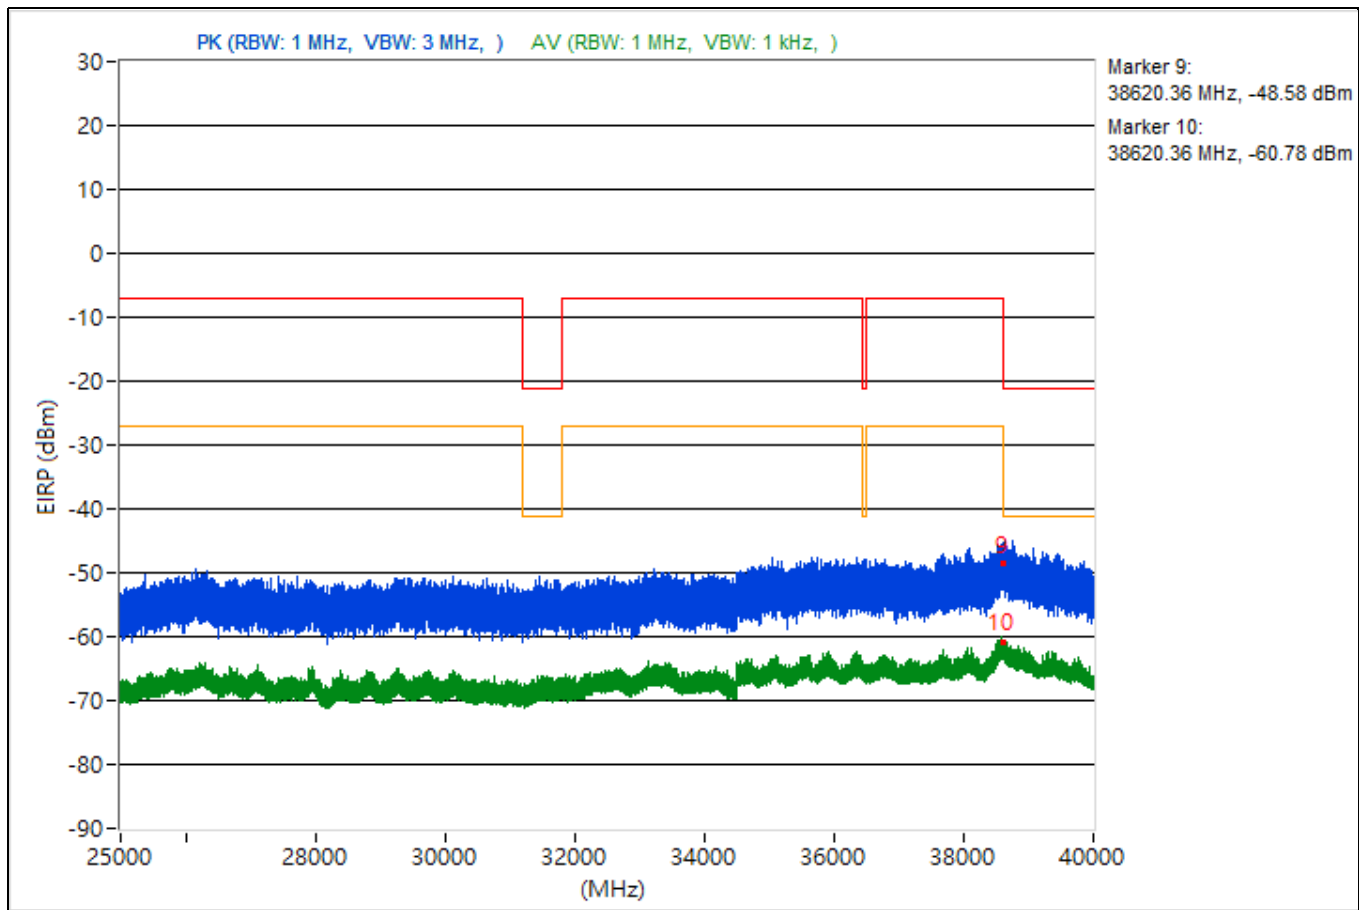


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3786.54	50.87 PK	74	-23.13	-51.95	-52.72	4.92	-44.39
2	3786.54	37.7 AV	54	-16.3	-68.04	-63.89	4.92	-57.56
3	14496.18	46.91 PK	74	-27.09	-58.37	-54.88	4.92	-48.35
4	14496.18	37.07 AV	54	-16.93	-64.76	-68.1	4.92	-58.19
5	19198.4	48.16 PK	74	-25.84	-55.58	-54.54	4.92	-47.1
6	19198.4	37.94 AV	54	-16.06	-63.87	-67.3	4.92	-57.32
7	23779.9	46.8 PK	74	-27.2	-55.95	-56.89	4.92	-48.46
8	23779.9	39.62 AV	54	-14.38	-62.37	-65.23	4.92	-55.64
9	38626.84	44.95 PK	74	-29.05	-59.89	-57.05	4.92	-50.31
10	38626.84	34.94 AV	54	-19.06	-66.81	-70.4	4.92	-60.32

Note: Margin value = Emission Level - Limit value

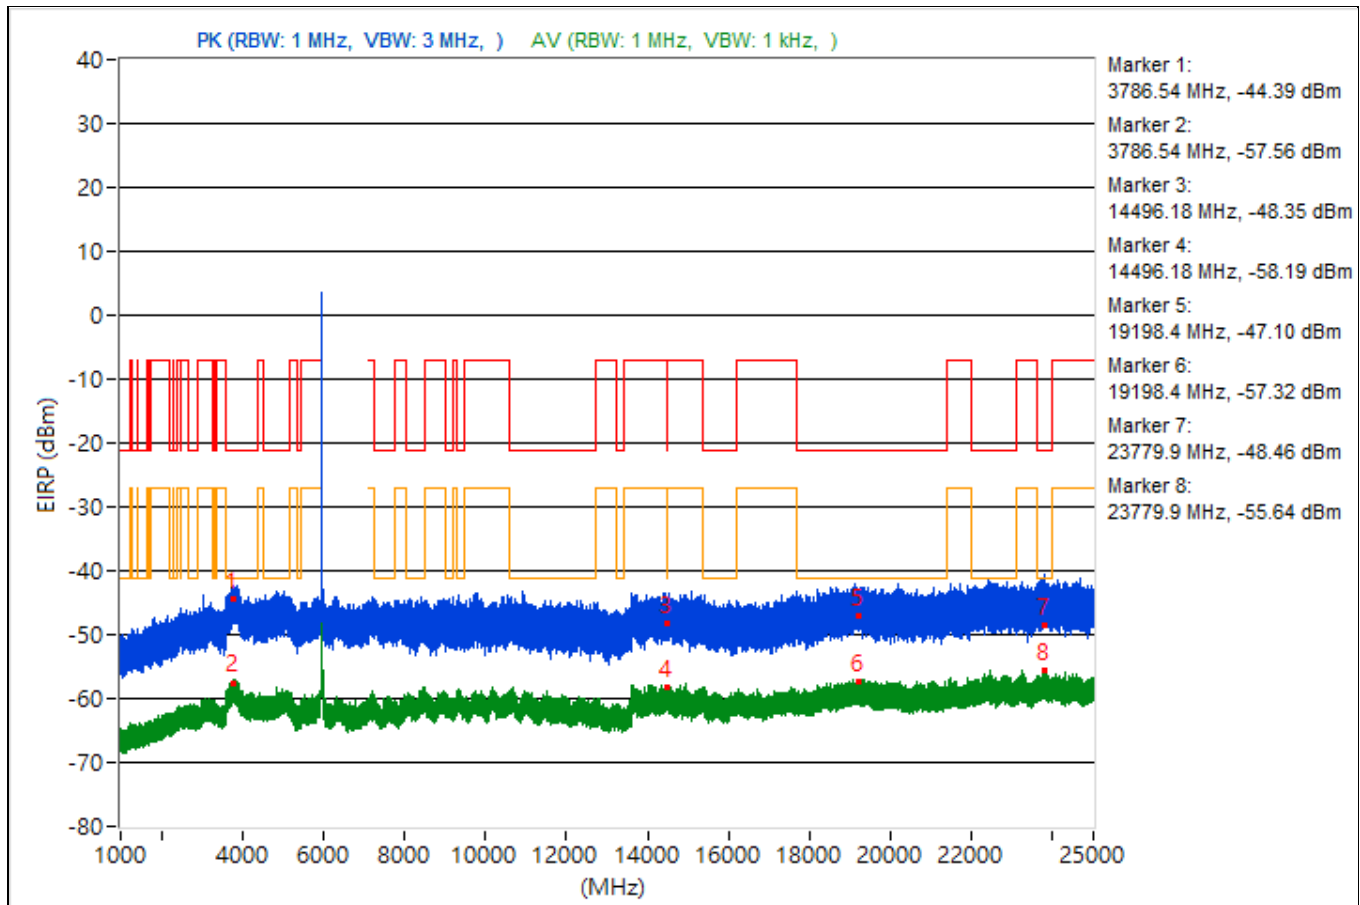


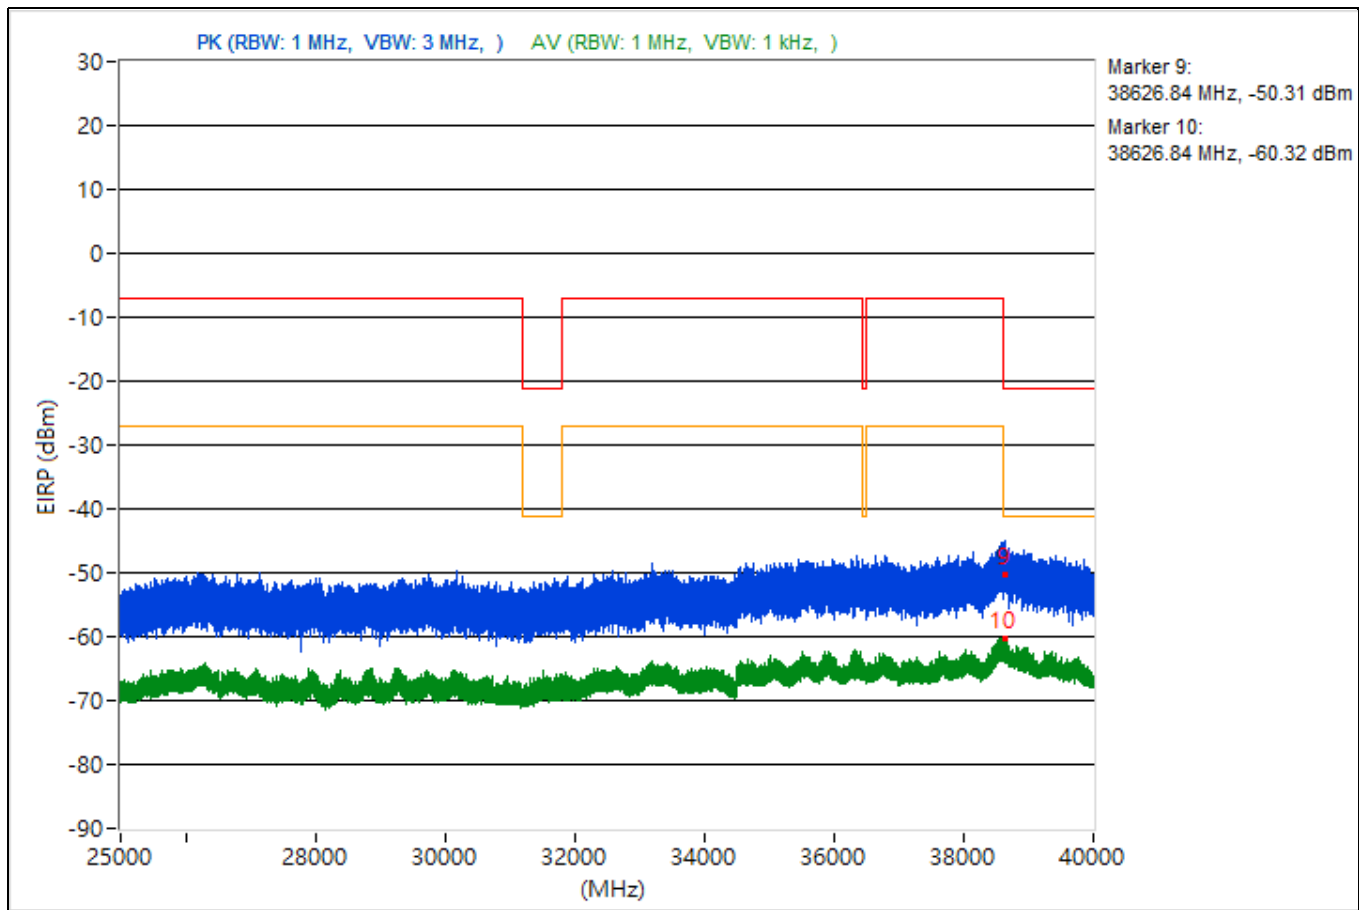


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3754.73	48.94 PK	74	-25.06	-54.07	-54.44	4.92	-46.32
2	3754.73	38.33 AV	54	-15.67	-64.09	-65.8	4.92	-56.93
3	8458.22	45.81 PK	74	-28.19	-58.9	-56.25	4.92	-49.45
4	8458.22	36.38 AV	54	-17.62	-68.1	-65.82	4.92	-58.88
5	19194.9	47.6 PK	74	-26.4	-56.3	-54.98	4.92	-47.66
6	19194.9	37.94 AV	54	-16.06	-67.26	-63.89	4.92	-57.32
7	23920.3	46.93 PK	74	-27.07	-55.33	-57.43	4.92	-48.33
8	23920.3	39.09 AV	54	-14.91	-63	-65.57	4.92	-56.17
9	38624	47.73 PK	74	-26.27	-54.94	-56.07	4.92	-47.53
10	38624	35.11 AV	54	-18.89	-67.8	-68.37	4.92	-60.15

Note: Margin value = Emission Level - Limit value

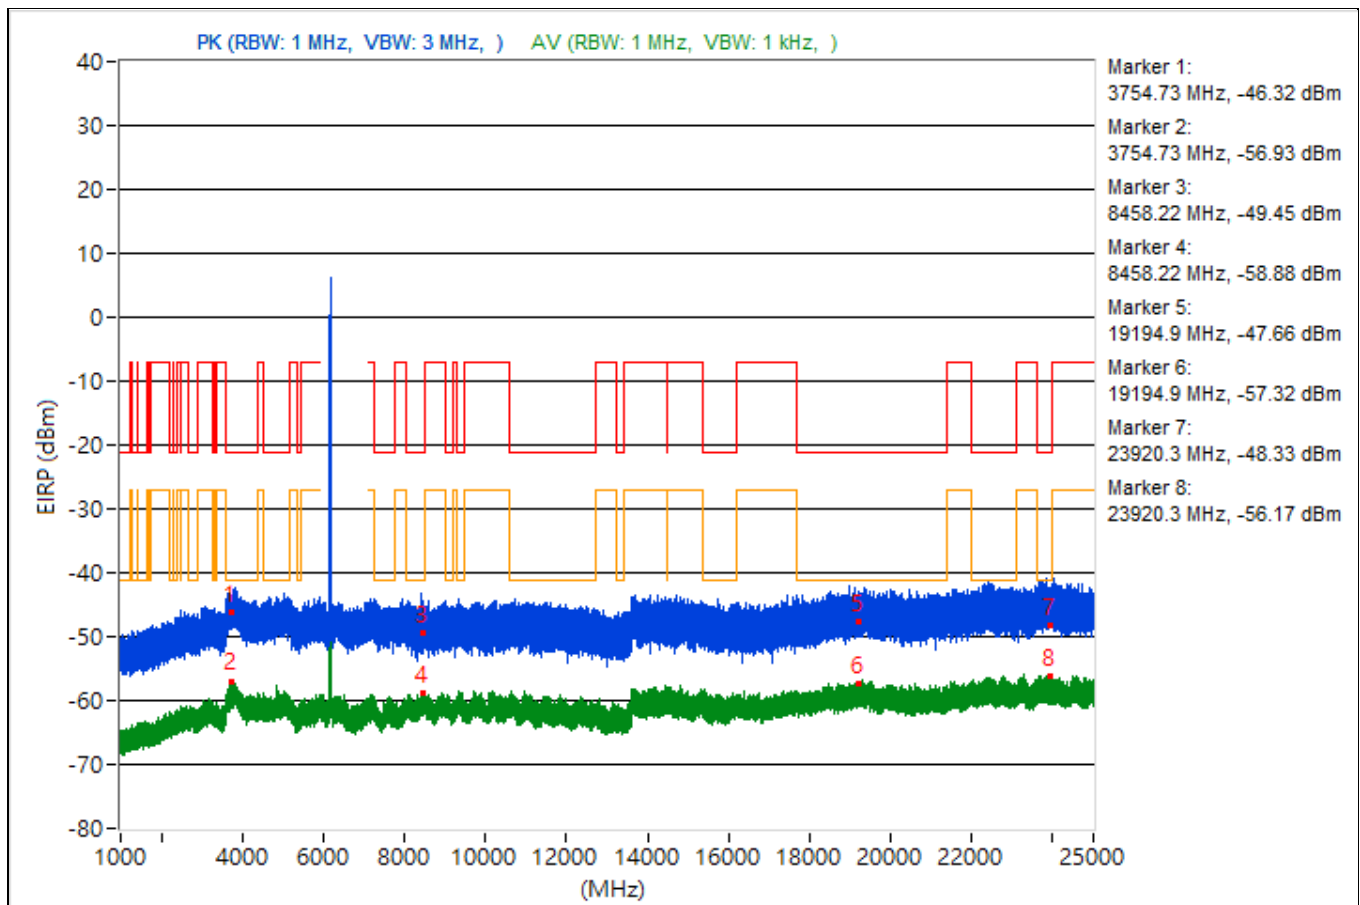


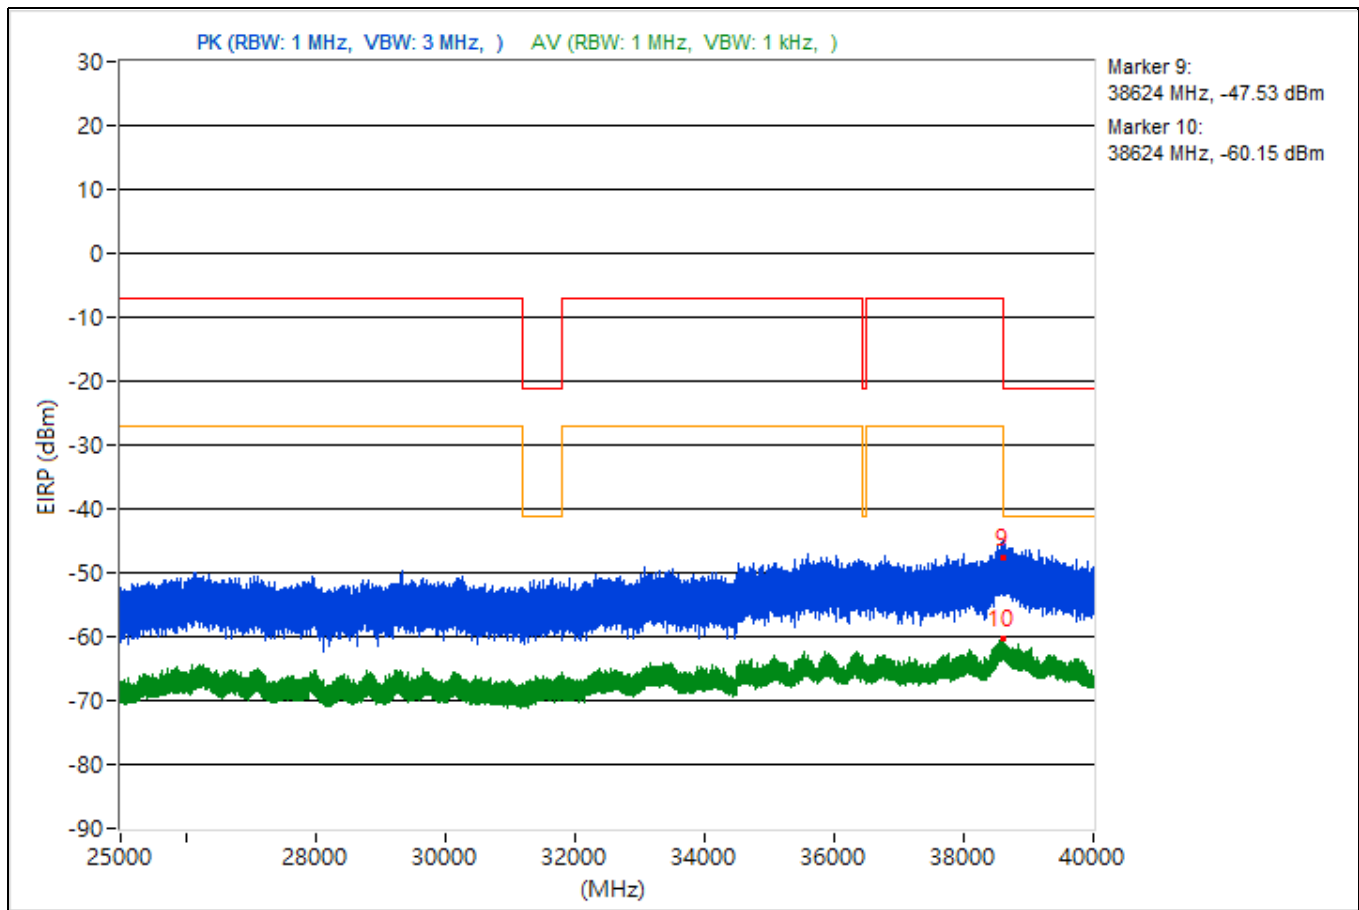


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3710.24	50.04 PK	74	-23.96	-52.47	-53.95	4.92	-45.22
2	3710.24	37.42 AV	54	-16.58	-64.47	-67.62	4.92	-57.84
3	14484.8	48.74 PK	74	-25.26	-54.4	-54.5	4.92	-46.52
4	14484.8	36.96 AV	54	-17.04	-67.52	-65.23	4.92	-58.3
5	19389.6	50.95 PK	74	-23.05	-53.99	-50.99	4.92	-44.31
6	19389.6	38.12 AV	54	-15.88	-63.84	-66.8	4.92	-57.14
7	22430	50.16 PK	74	-23.84	-52.77	-53.31	4.92	-45.1
8	22430	38.81 AV	54	-15.19	-66.22	-63.09	4.92	-56.45
9	38625.42	47.42 PK	74	-26.58	-58.2	-54.22	4.92	-47.84
10	38625.42	34.2 AV	54	-19.8	-67.7	-70.82	4.92	-61.06

Note: Margin value = Emission Level - Limit value

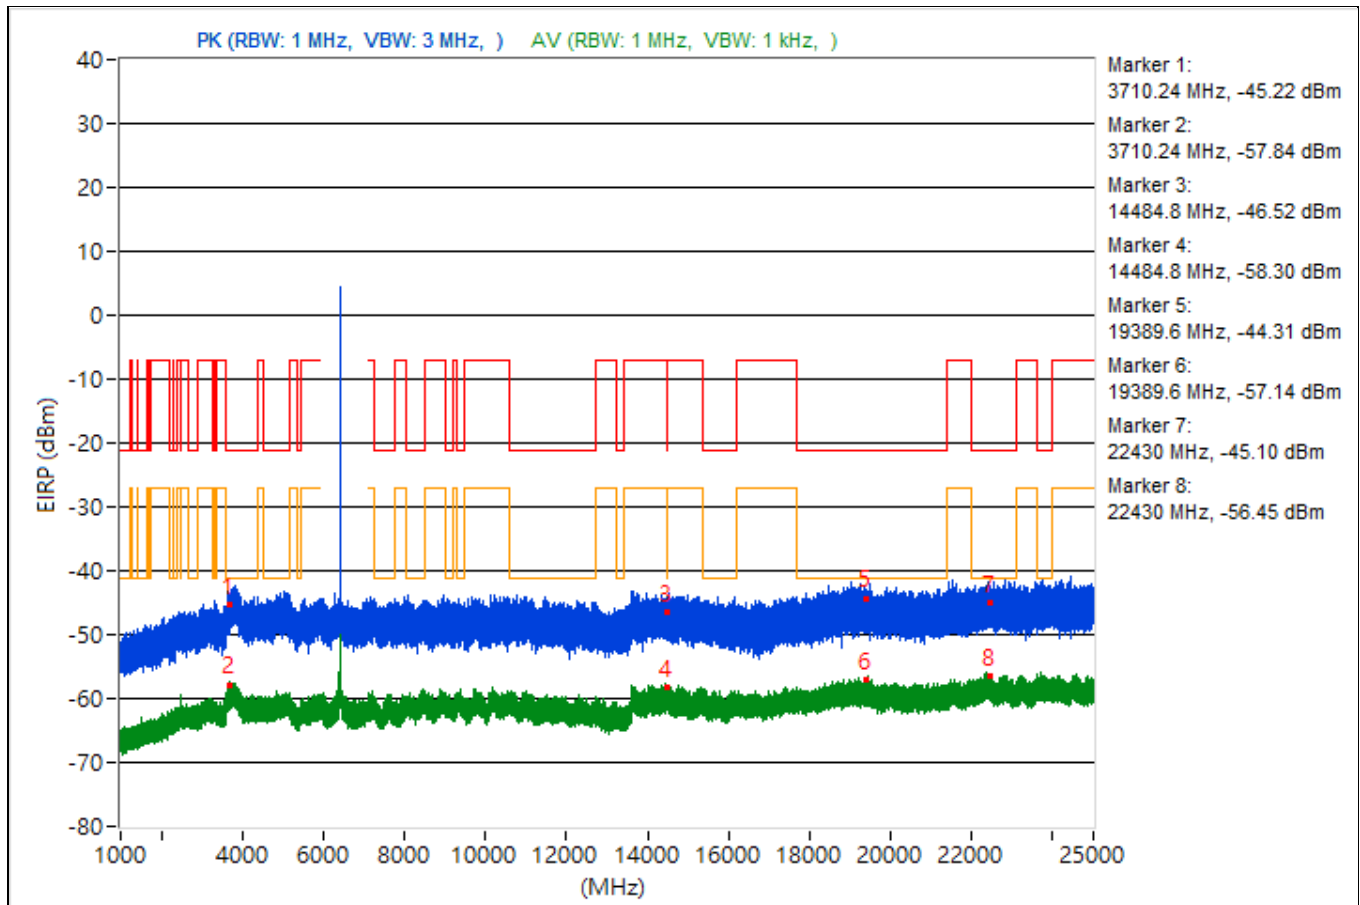


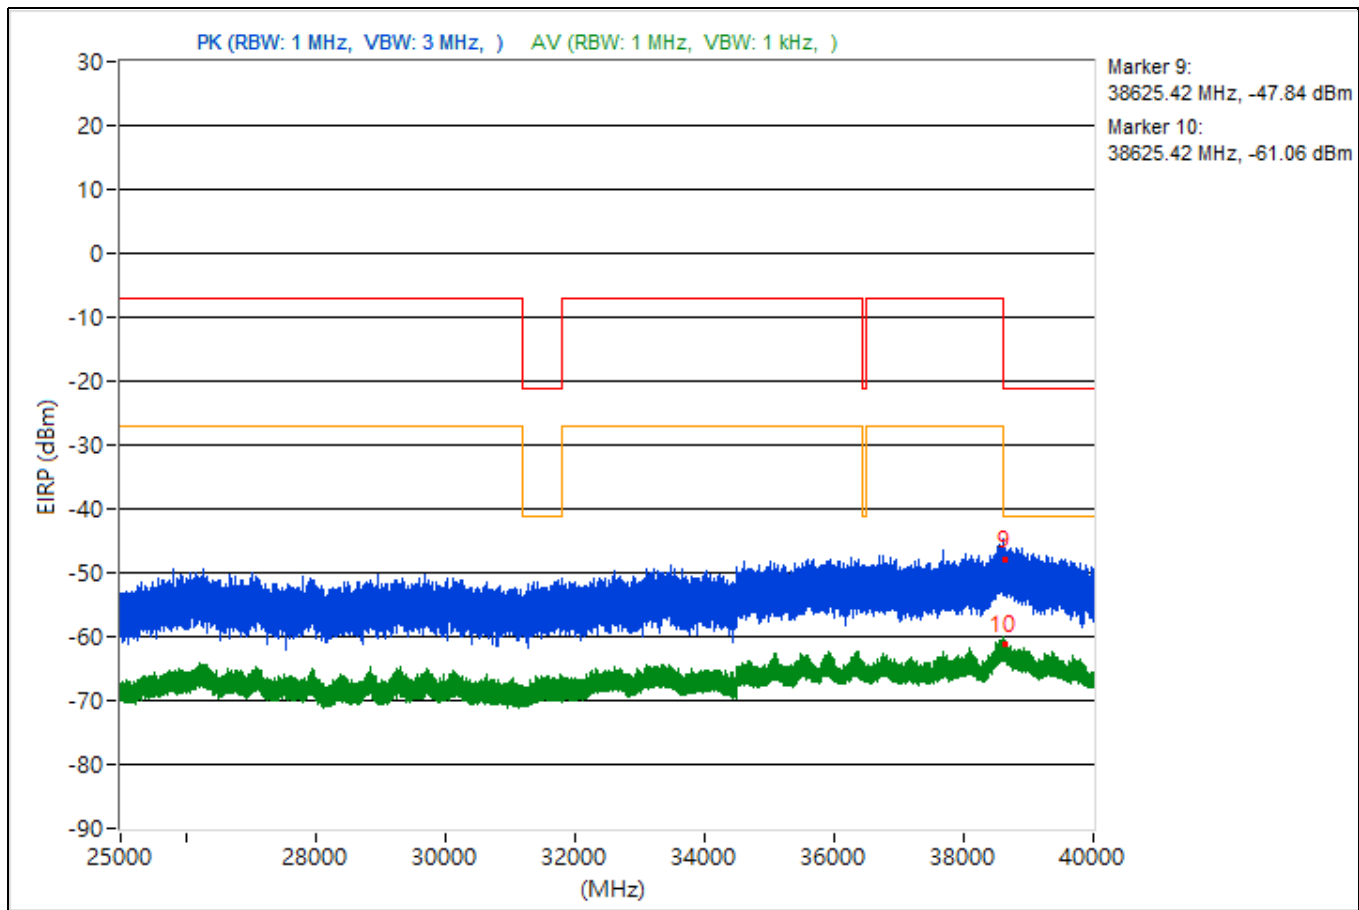


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3797.67	50.13 PK	74	-23.87	-52.97	-53.15	4.92	-45.13
2	3797.67	37.45 AV	54	-16.55	-67.69	-64.4	4.92	-57.81
3	14478.04	48.31 PK	74	-25.69	-54.62	-55.17	4.92	-46.95
4	14478.04	36.87 AV	54	-17.13	-65.35	-67.58	4.92	-58.39
5	20263.4	47.89 PK	74	-26.11	-54.2	-56.78	4.92	-47.37
6	20263.4	37.89 AV	54	-16.11	-68.81	-63.39	4.92	-57.37
7	22396.6	51.36 PK	74	-22.64	-53.08	-50.86	4.92	-43.9
8	22396.6	38.53 AV	54	-15.47	-66.8	-63.23	4.92	-56.73
9	38625.96	46.99 PK	74	-27.01	-56.36	-56.05	4.92	-48.27
10	38625.96	35.06 AV	54	-18.94	-68.89	-67.48	4.92	-60.2

Note: Margin value = Emission Level - Limit value

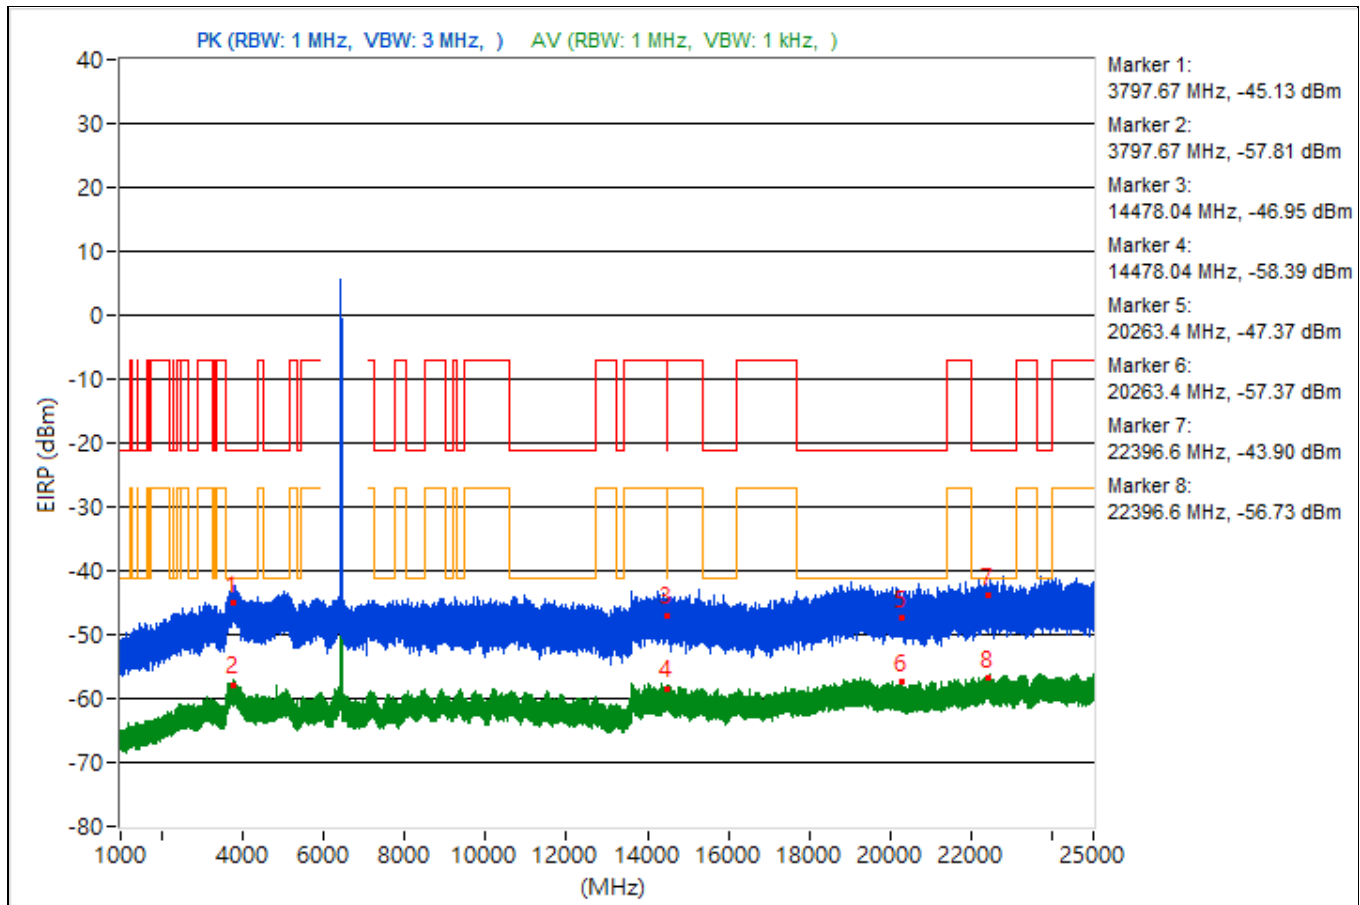


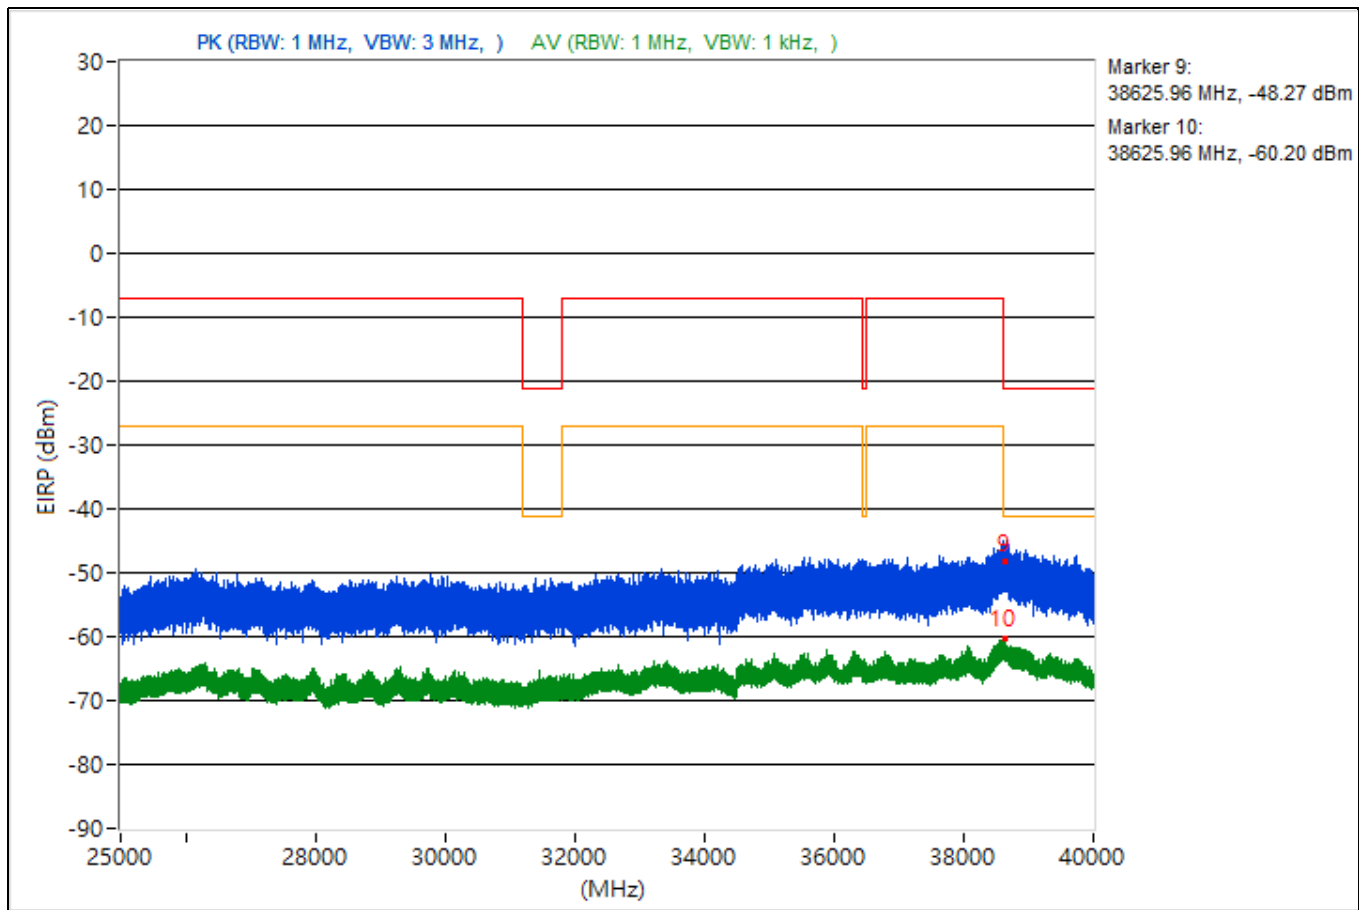


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3802.57	50.46 PK	74	-23.54	-53.24	-52.27	4.92	-44.8
2	3802.57	37.71 AV	54	-16.29	-64.59	-66.59	4.92	-57.55
3	14480.98	48.86 PK	74	-25.14	-54.66	-54.02	4.92	-46.4
4	14480.98	37.42 AV	54	-16.58	-65.13	-66.53	4.92	-57.84
5	19155.2	48.57 PK	74	-25.43	-53.22	-56.71	4.92	-46.69
6	19155.2	38.9 AV	54	-15.1	-63.27	-65.62	4.92	-56.36
7	22351.8	50.68 PK	74	-23.32	-51.93	-53.19	4.92	-44.58
8	22351.8	38.88 AV	54	-15.12	-67.41	-62.52	4.92	-56.38
9	38616.27	44.08 PK	74	-29.92	-59.69	-58.6	4.92	-51.18
10	38616.27	34.95 AV	54	-19.05	-69.2	-67.47	4.92	-60.31

Note: Margin value = Emission Level - Limit value

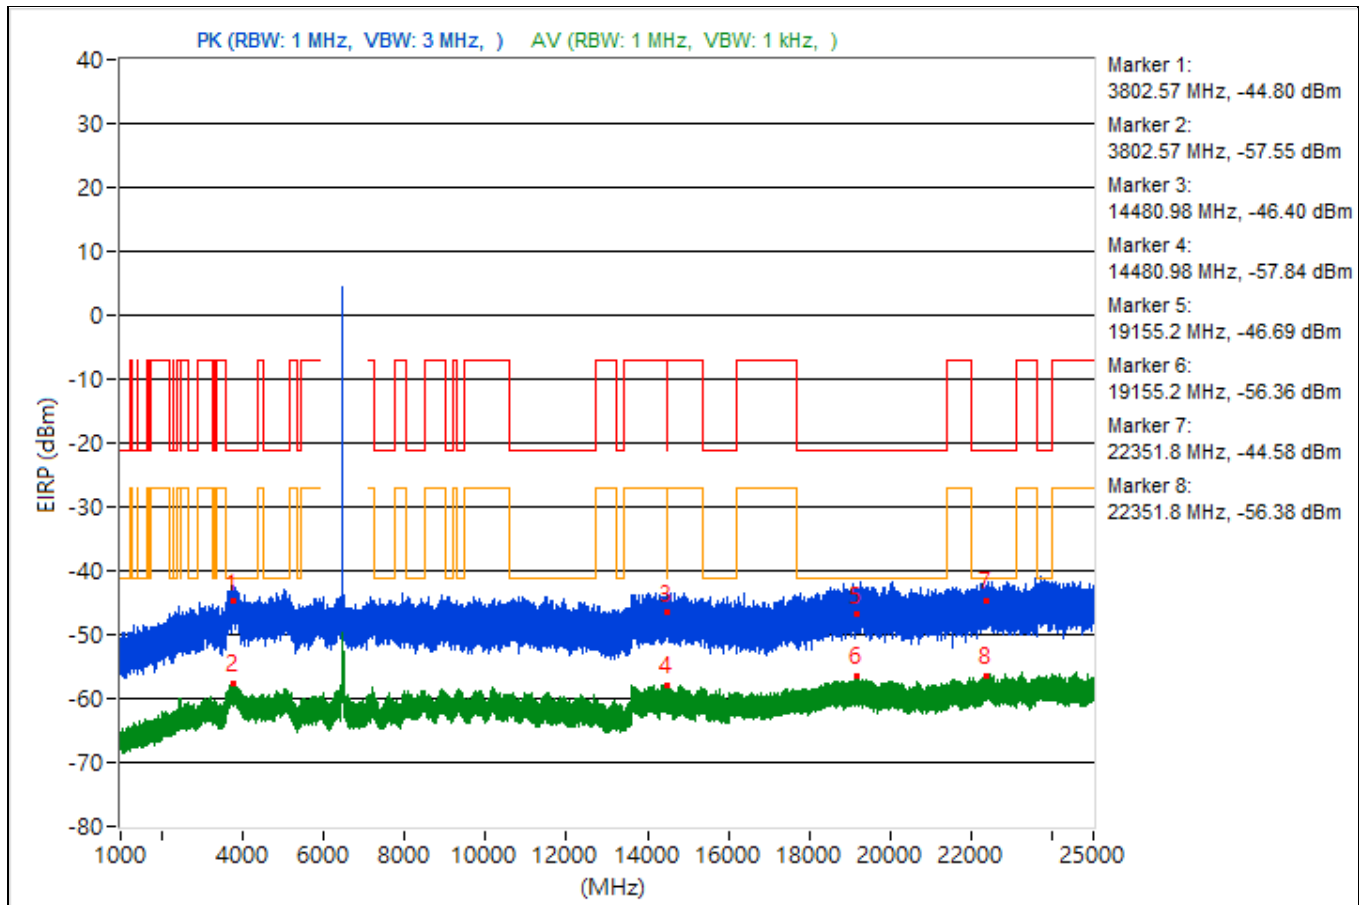


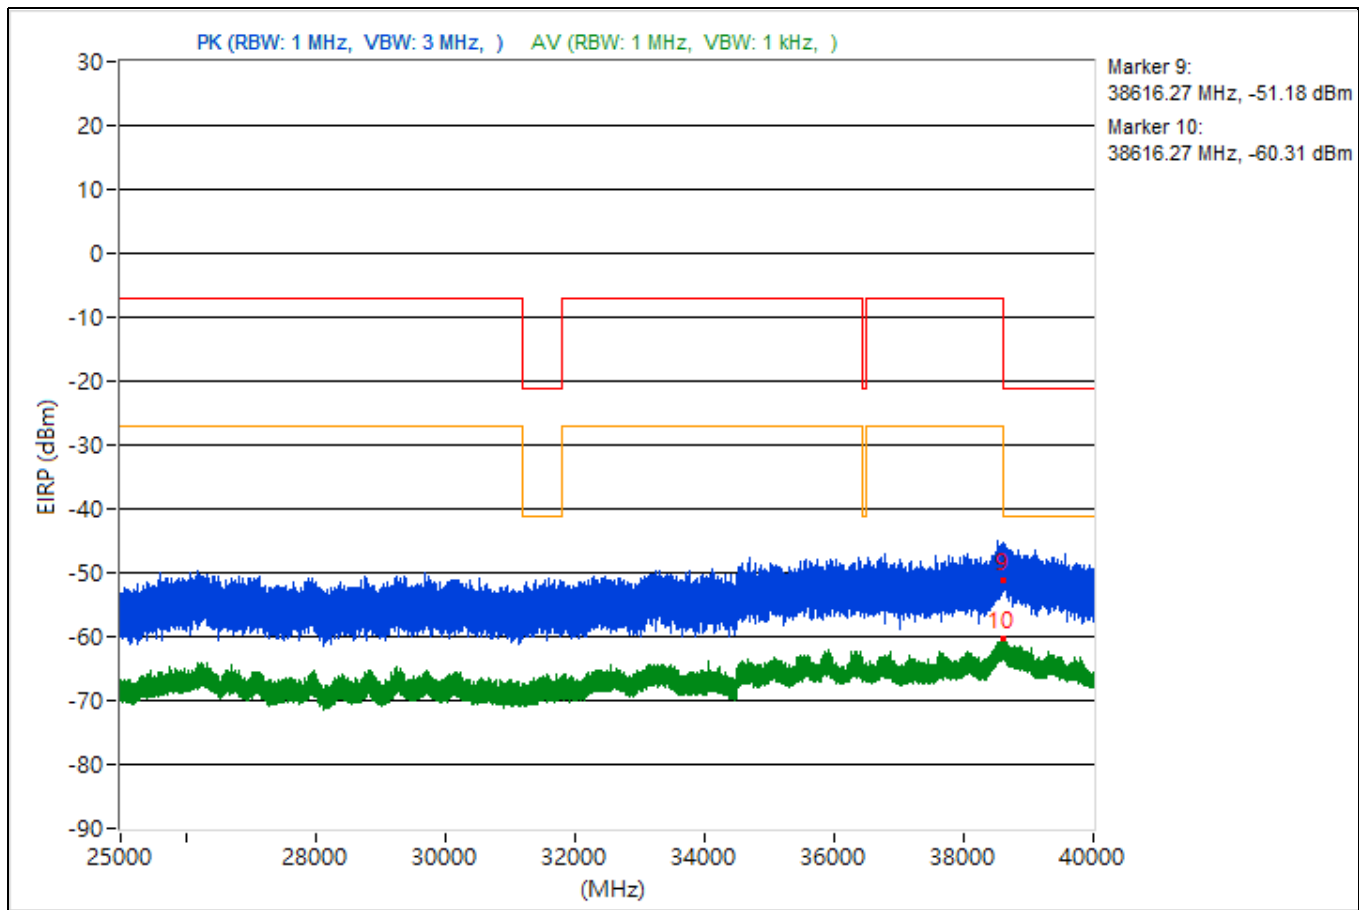


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3802.64	50.87 PK	74	-23.13	-52.01	-52.64	4.92	-44.39
2	3802.64	37.8 AV	54	-16.2	-64.12	-67.19	4.92	-57.46
3	14475.82	47.95 PK	74	-26.05	-56.73	-54.12	4.92	-47.31
4	14475.82	37.03 AV	54	-16.97	-65.1	-67.58	4.92	-58.23
5	19203.6	48.21 PK	74	-25.79	-54.52	-55.49	4.92	-47.05
6	19203.6	38.4 AV	54	-15.6	-63.55	-66.52	4.92	-56.86
7	23693.3	51.3 PK	74	-22.7	-55.12	-50.06	4.92	-43.96
8	23693.3	39.13 AV	54	-14.87	-66.23	-62.62	4.92	-56.13
9	38639.64	45.27 PK	74	-28.73	-57.11	-58.92	4.92	-49.99
10	38639.64	34.36 AV	54	-19.64	-67.46	-70.84	4.92	-60.9

Note: Margin value = Emission Level - Limit value

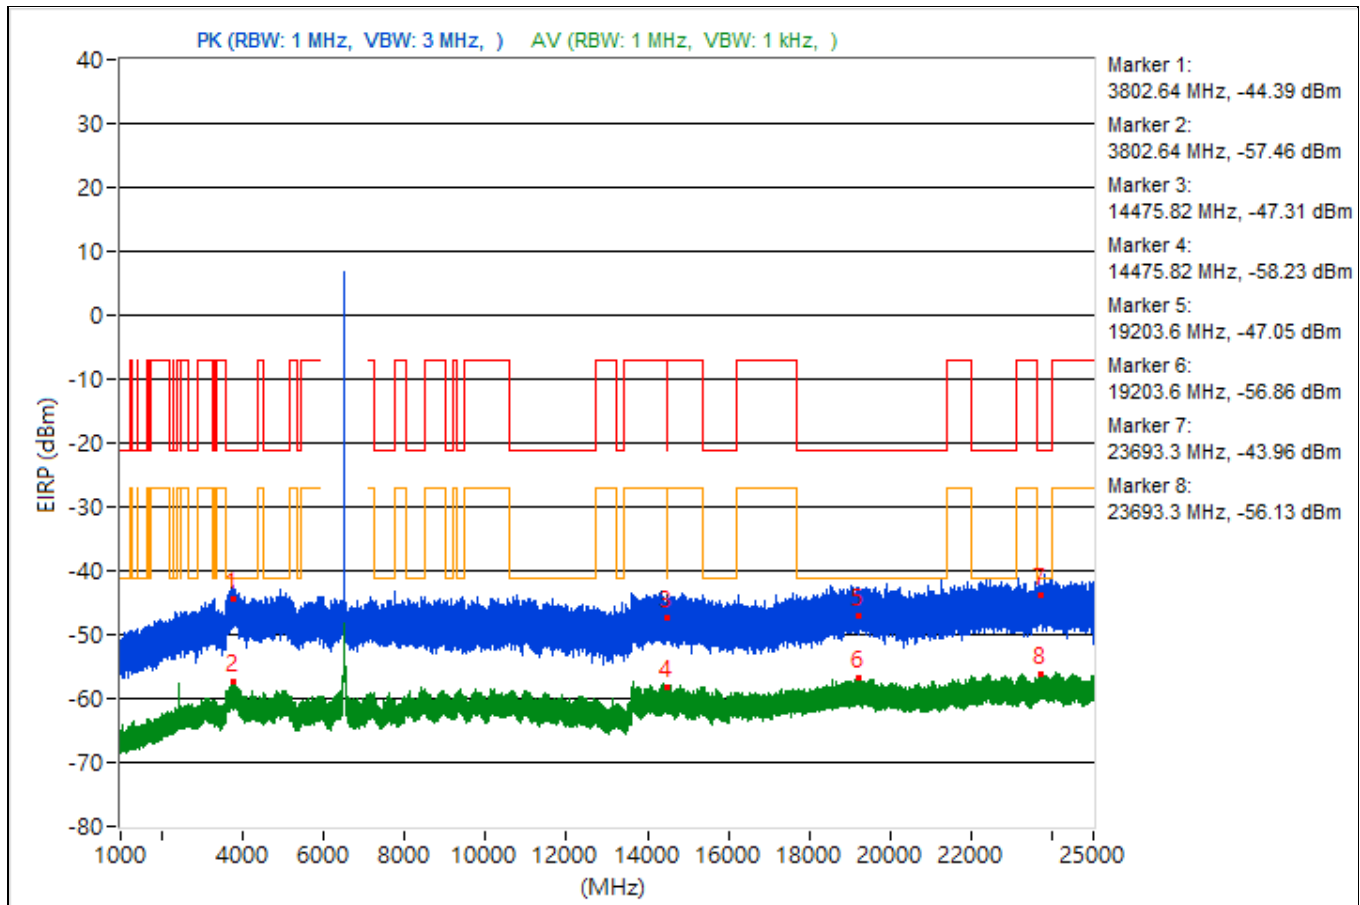


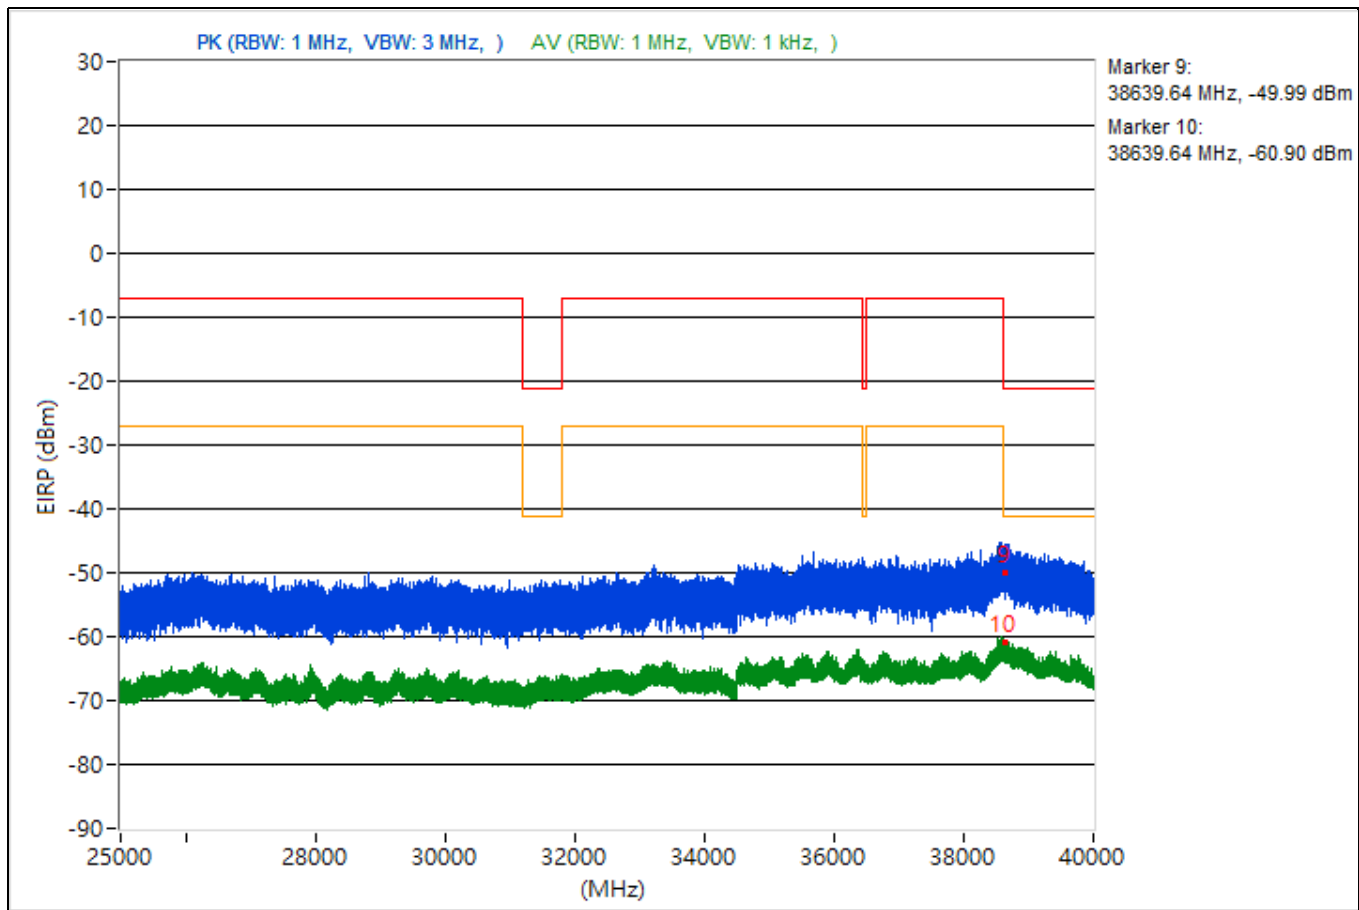


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3814.47	48.79 PK	74	-25.21	-54.31	-54.5	4.92	-46.47
2	3814.47	37.69 AV	54	-16.31	-63.82	-68.3	4.92	-57.57
3	14470.58	48.88 PK	74	-25.12	-54.98	-53.72	4.92	-46.38
4	14470.58	36.44 AV	54	-17.56	-69.18	-65.2	4.92	-58.82
5	19420.2	49 PK	74	-25	-55.47	-53.2	4.92	-46.26
6	19420.2	37.77 AV	54	-16.23	-63.67	-68.37	4.92	-57.49
7	22391.3	48.78 PK	74	-25.22	-54.19	-54.64	4.92	-46.48
8	22391.3	39.48 AV	54	-14.52	-65.42	-62.48	4.92	-55.78
9	38623.29	46.03 PK	74	-27.97	-56.1	-58.58	4.92	-49.23
10	38623.29	34.8 AV	54	-19.2	-69.04	-67.83	4.92	-60.46

Note: Margin value = Emission Level - Limit value

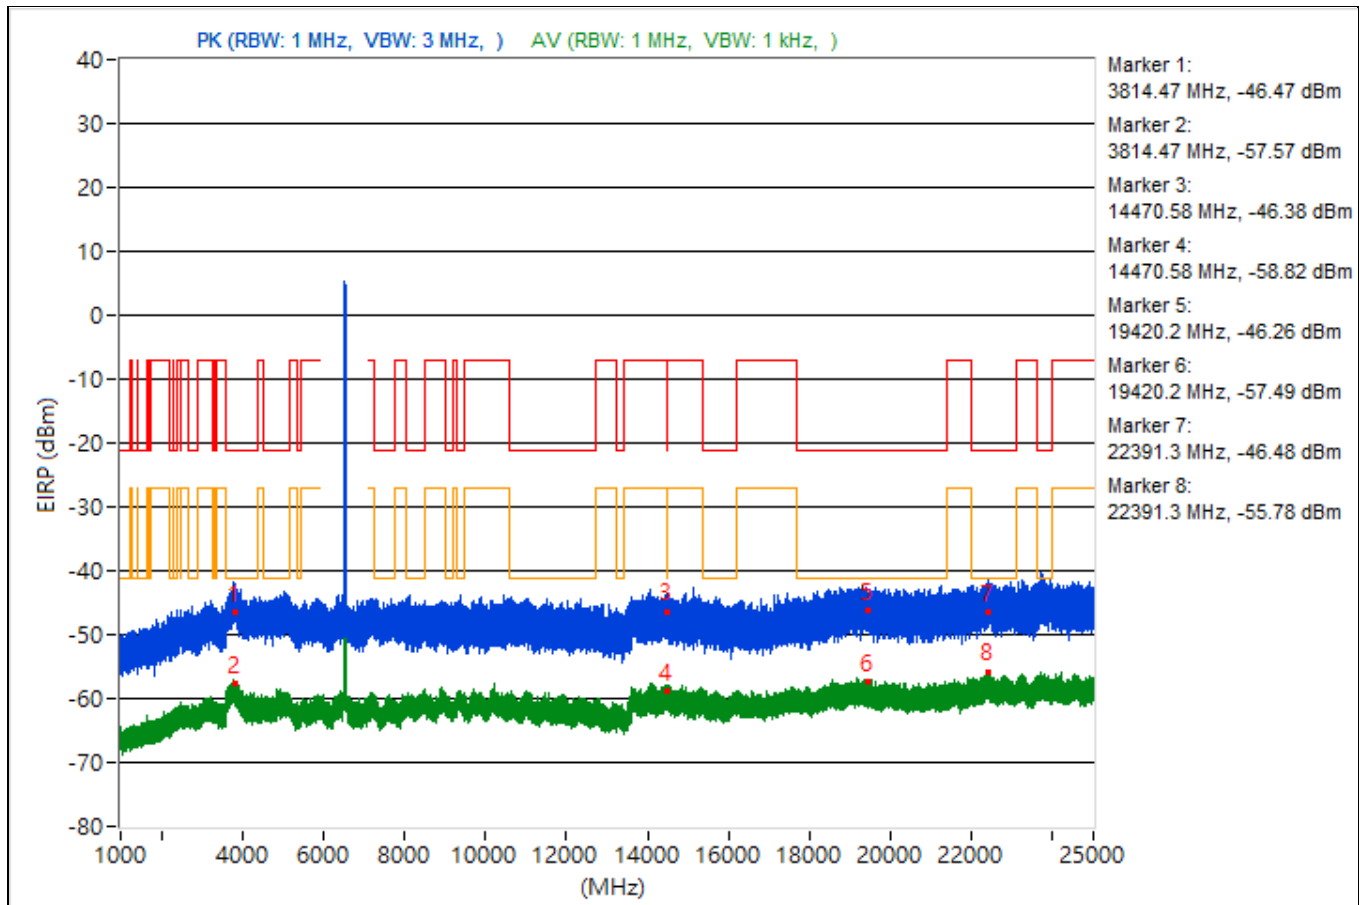


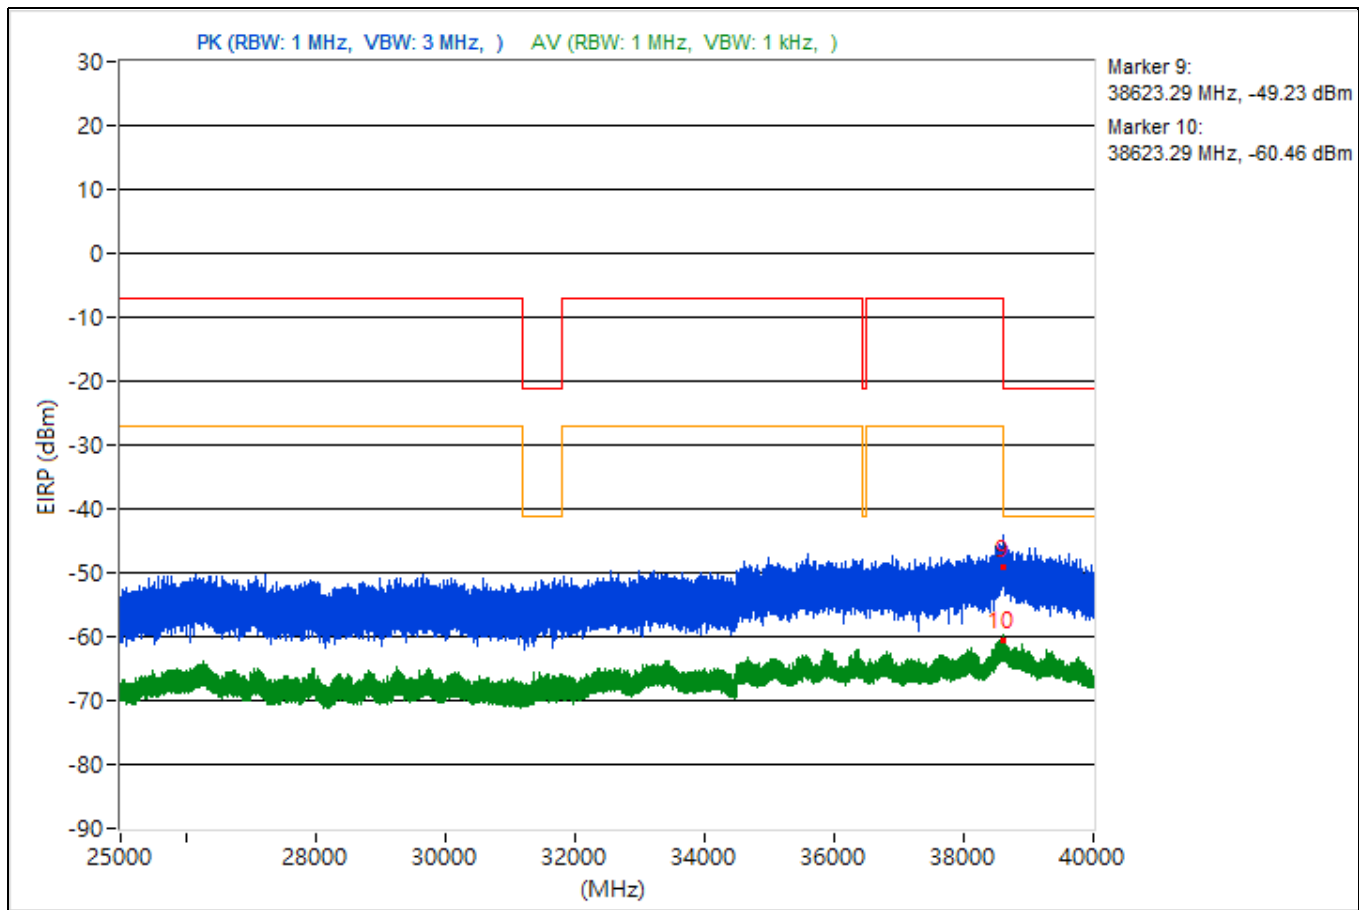


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3763.76	49.46 PK	74	-24.54	-54.35	-53.19	4.92	-45.8
2	3763.76	38.29 AV	54	-15.71	-65.56	-64.33	4.92	-56.97
3	9352	47.55 PK	74	-26.45	-56.21	-55.14	4.92	-47.71
4	9352	36.21 AV	54	-17.79	-65.44	-69.39	4.92	-59.05
5	18987.4	49.06 PK	74	-24.94	-52.93	-55.8	4.92	-46.2
6	18987.4	38.42 AV	54	-15.58	-63.14	-67.4	4.92	-56.84
7	23703.9	48.65 PK	74	-25.35	-54.42	-54.65	4.92	-46.61
8	23703.9	39.75 AV	54	-14.25	-62.64	-64.42	4.92	-55.51
9	38626.22	45.05 PK	74	-28.95	-58.45	-57.86	4.92	-50.21
10	38626.22	34.52 AV	54	-19.48	-67.45	-70.39	4.92	-60.74

Note: Margin value = Emission Level - Limit value

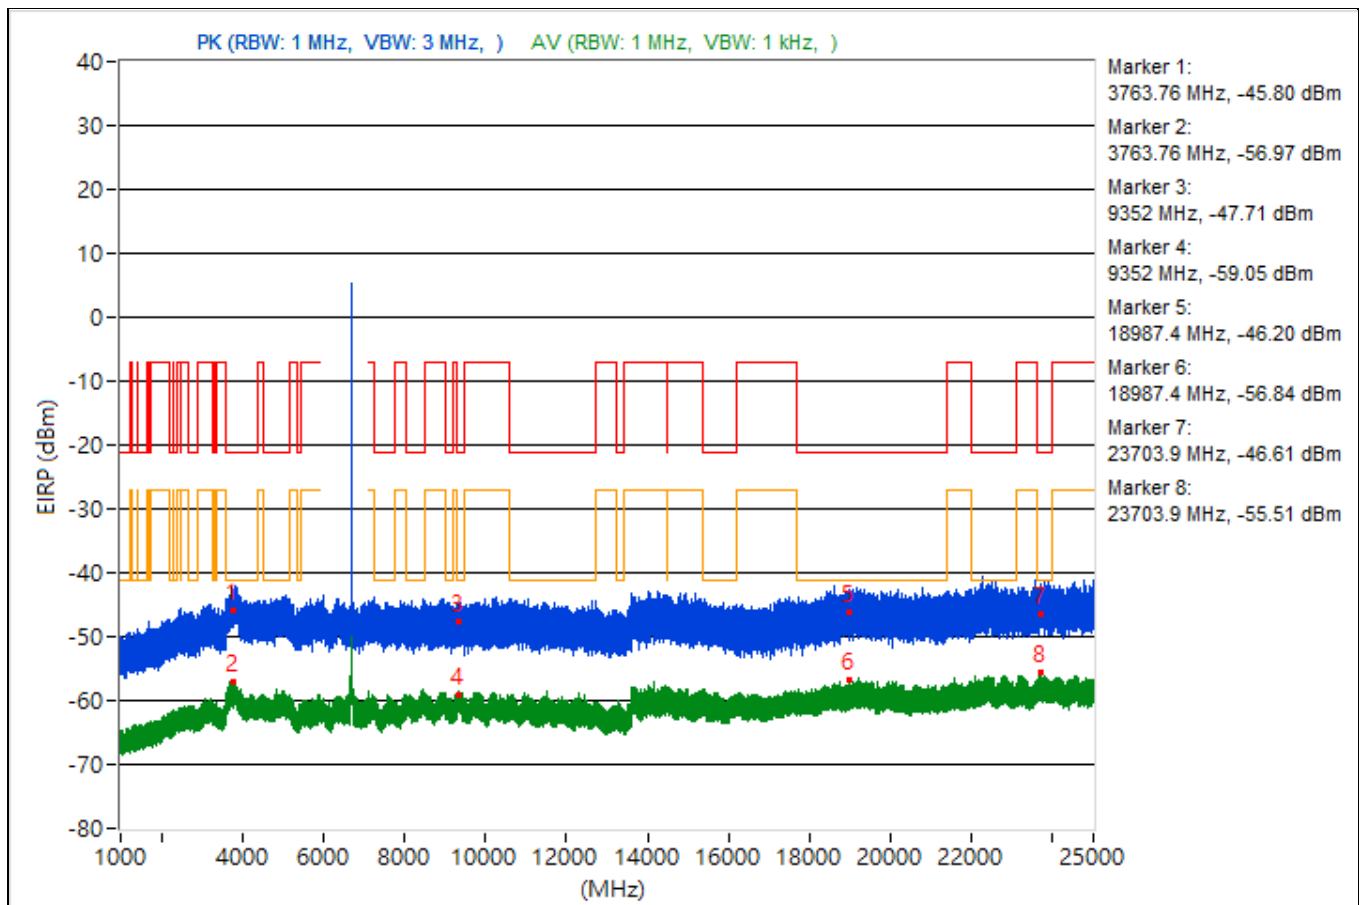


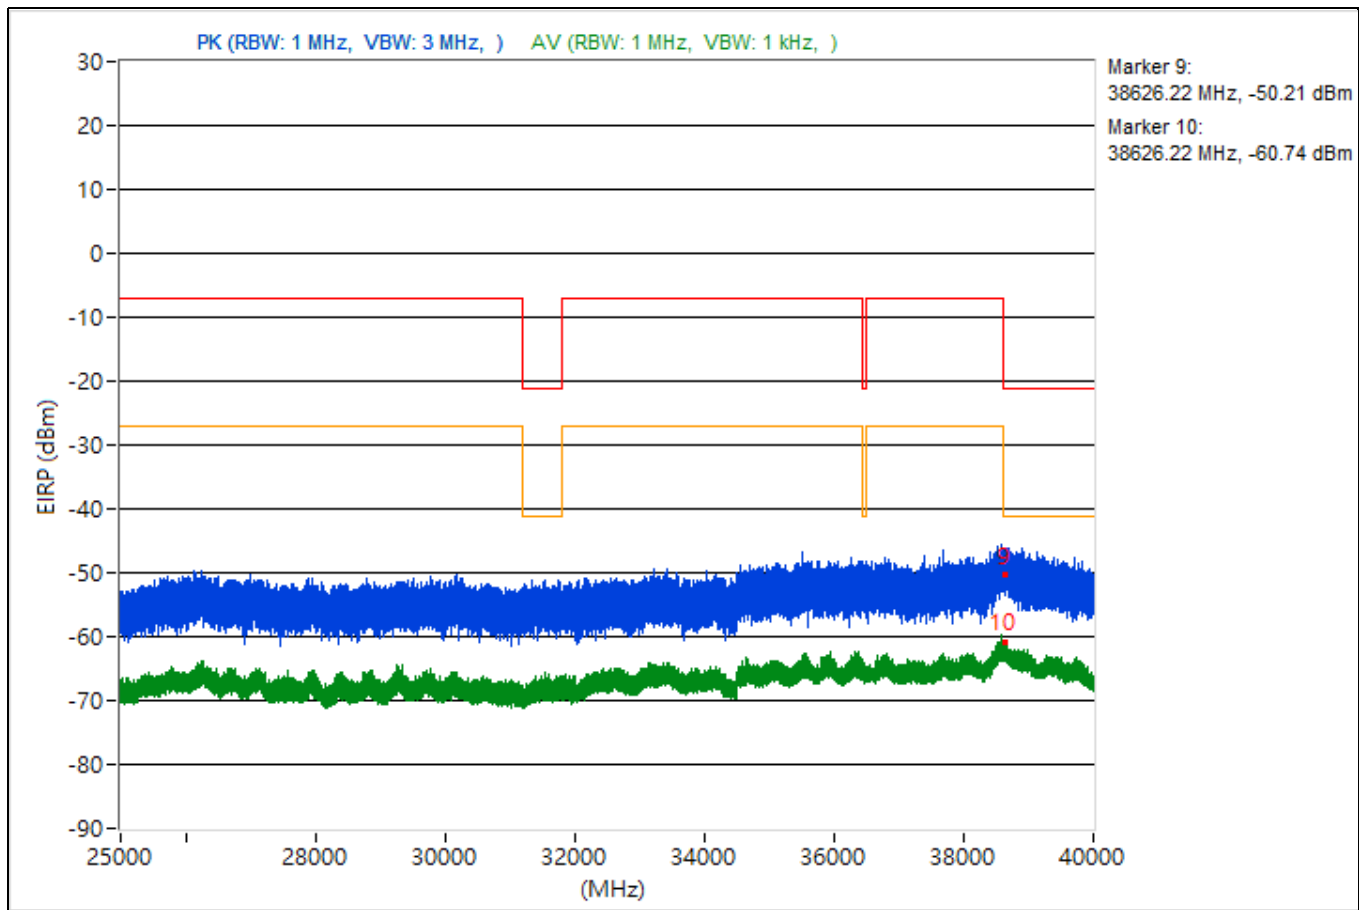


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3873.27	50.49 PK	74	-23.51	-53.82	-51.82	4.92	-44.77
2	3873.27	38.16 AV	54	-15.84	-66.4	-64	4.92	-57.1
3	15384.8	48.82 PK	74	-25.18	-53.77	-55.06	4.92	-46.44
4	15384.8	37.08 AV	54	-16.92	-66.83	-65.49	4.92	-58.18
5	19175.2	49.81 PK	74	-24.19	-53.31	-53.45	4.92	-45.45
6	19175.2	38.24 AV	54	-15.76	-66.89	-63.61	4.92	-57.02
7	23789.6	51.04 PK	74	-22.96	-50.41	-55.07	4.92	-44.22
8	23789.6	39.22 AV	54	-14.78	-64.65	-63.38	4.92	-56.04
9	38623.29	45.08 PK	74	-28.92	-61.19	-56.32	4.92	-50.18
10	38623.29	35 AV	54	-19	-67.02	-69.81	4.92	-60.26

Note: Margin value = Emission Level - Limit value

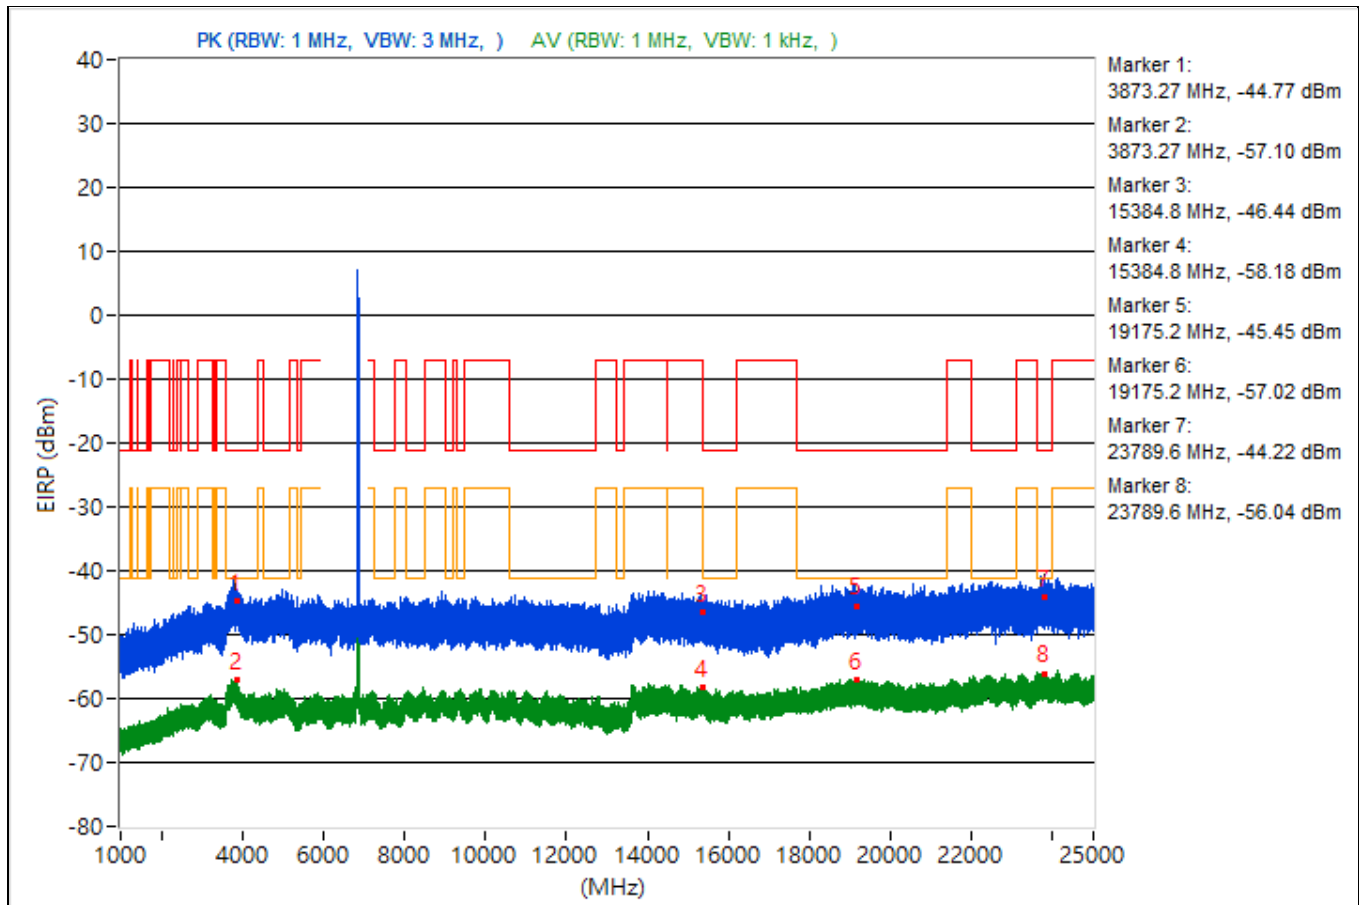


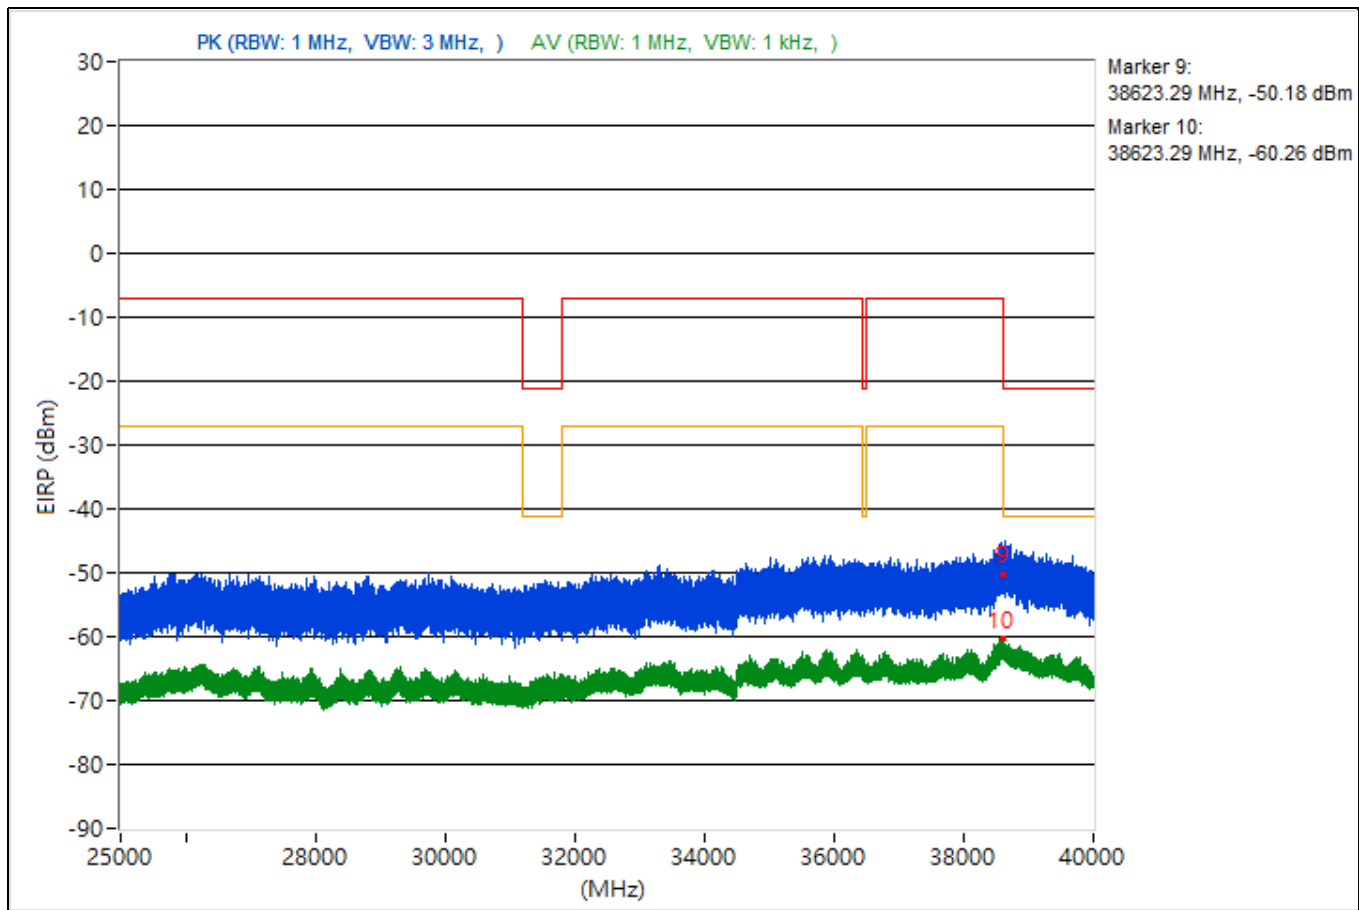


RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3839.04	48.21 PK	74	-25.79	-55.14	-54.82	4.92	-47.05
2	3839.04	37.96 AV	54	-16.04	-64.07	-66.81	4.92	-57.3
3	14473.33	45.05 PK	74	-28.95	-59.64	-57.03	4.92	-50.21
4	14473.33	36.82 AV	54	-17.18	-65.19	-68.01	4.92	-58.44
5	19133.8	48.6 PK	74	-25.4	-54.26	-54.95	4.92	-46.66
6	19133.8	38.05 AV	54	-15.95	-67	-63.85	4.92	-57.21
7	23651.7	49.6 PK	74	-24.4	-53.4	-53.79	4.92	-45.66
8	23651.7	39.4 AV	54	-14.6	-62.67	-65.3	4.92	-55.86
9	38604.89	45.24 PK	74	-28.76	-56.92	-59.29	4.92	-50.02
10	38604.89	34.26 AV	54	-19.74	-71.07	-67.51	4.92	-61

Note: Margin value = Emission Level - Limit value

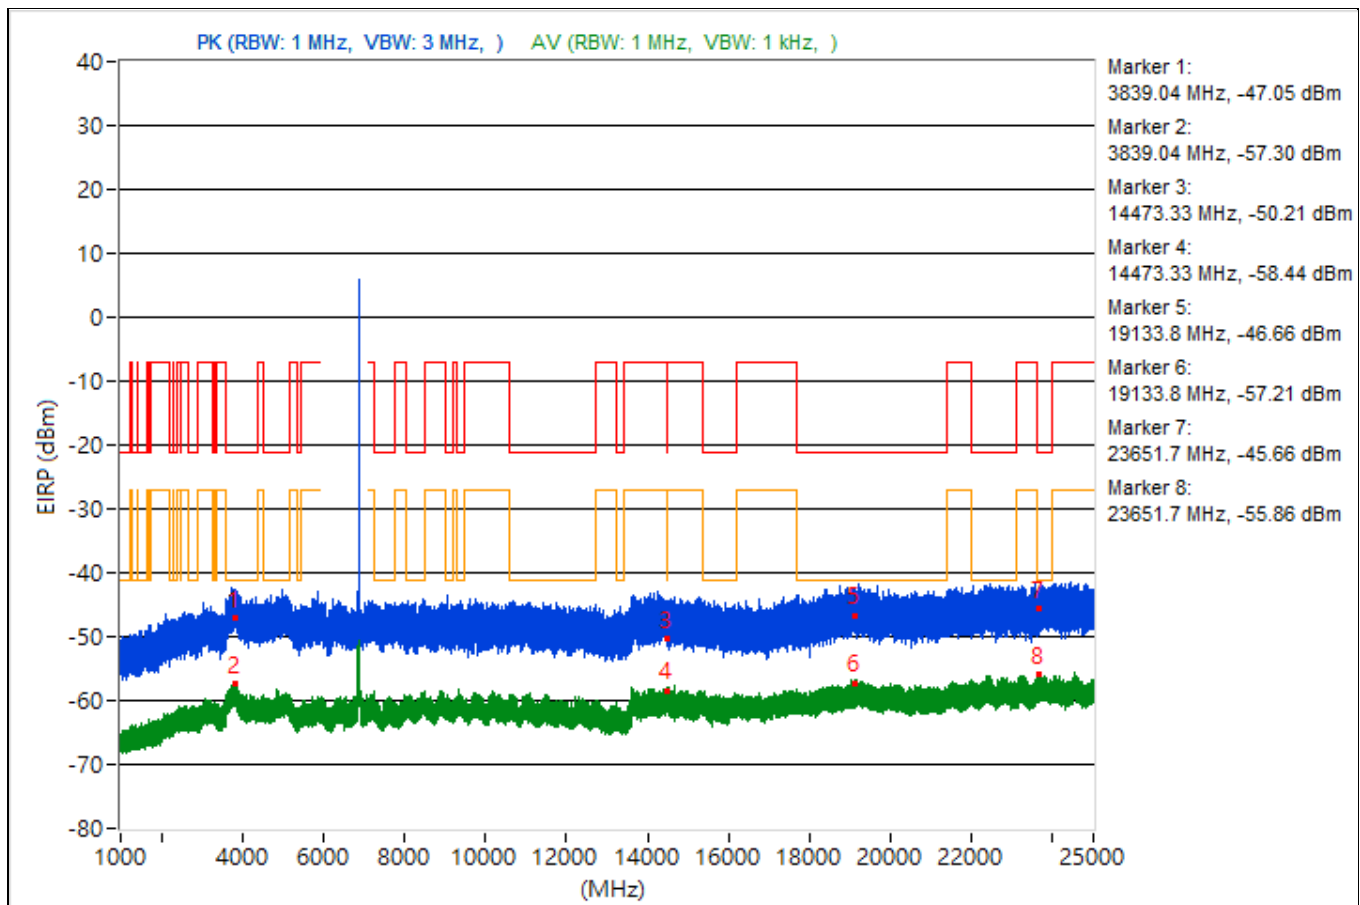


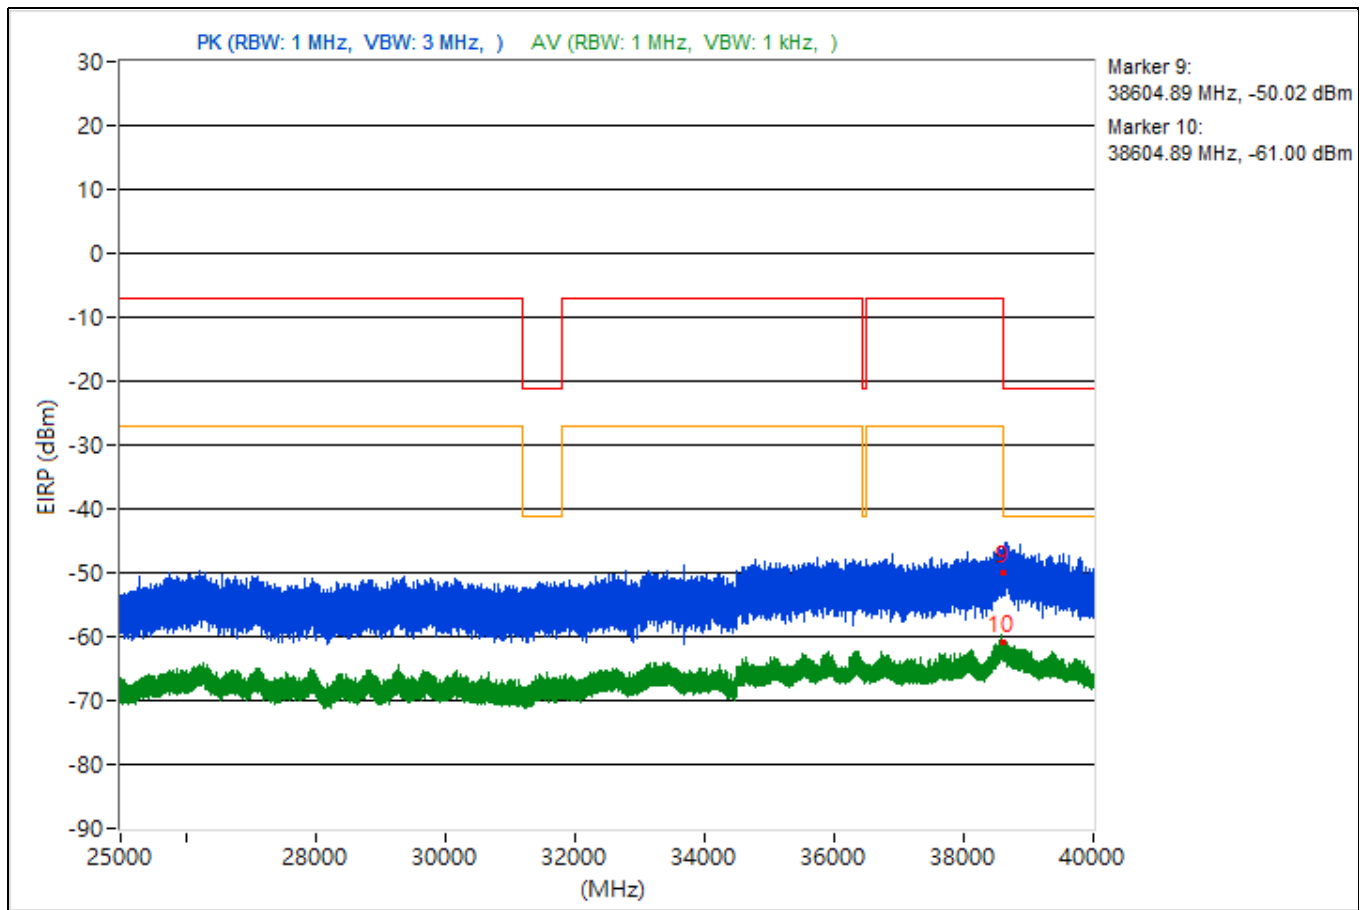


RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3833.21	49.05 PK	74	-24.95	-56.37	-52.68	4.92	-46.21
2	3833.21	37.34 AV	54	-16.66	-68.12	-64.37	4.92	-57.92
3	15376.8	47.48 PK	74	-26.52	-56.87	-54.8	4.92	-47.78
4	15376.8	36.85 AV	54	-17.15	-65.09	-68.1	4.92	-58.41
5	19244.4	49.86 PK	74	-24.14	-53.62	-53.07	4.92	-45.4
6	19244.4	37.63 AV	54	-16.37	-63.81	-68.53	4.92	-57.63
7	23816.2	49.75 PK	74	-24.25	-53.15	-53.75	4.92	-45.51
8	23816.2	39.03 AV	54	-14.97	-62.59	-66.64	4.92	-56.23
9	38637.69	47.78 PK	74	-26.22	-55.29	-55.53	4.92	-47.48
10	38637.69	34.69 AV	54	-19.31	-67.12	-70.53	4.92	-60.57

Note: Margin value = Emission Level - Limit value

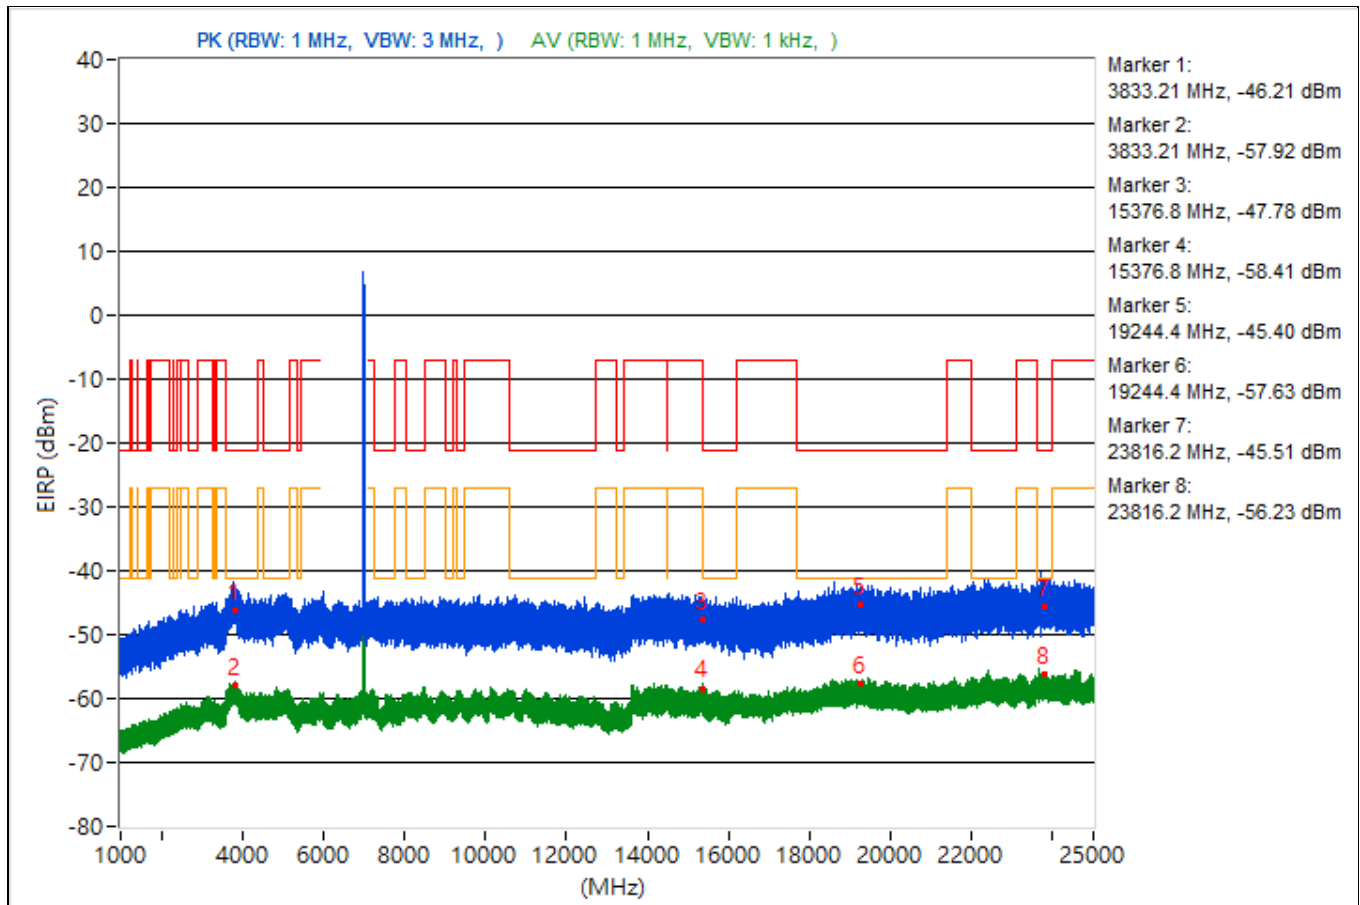


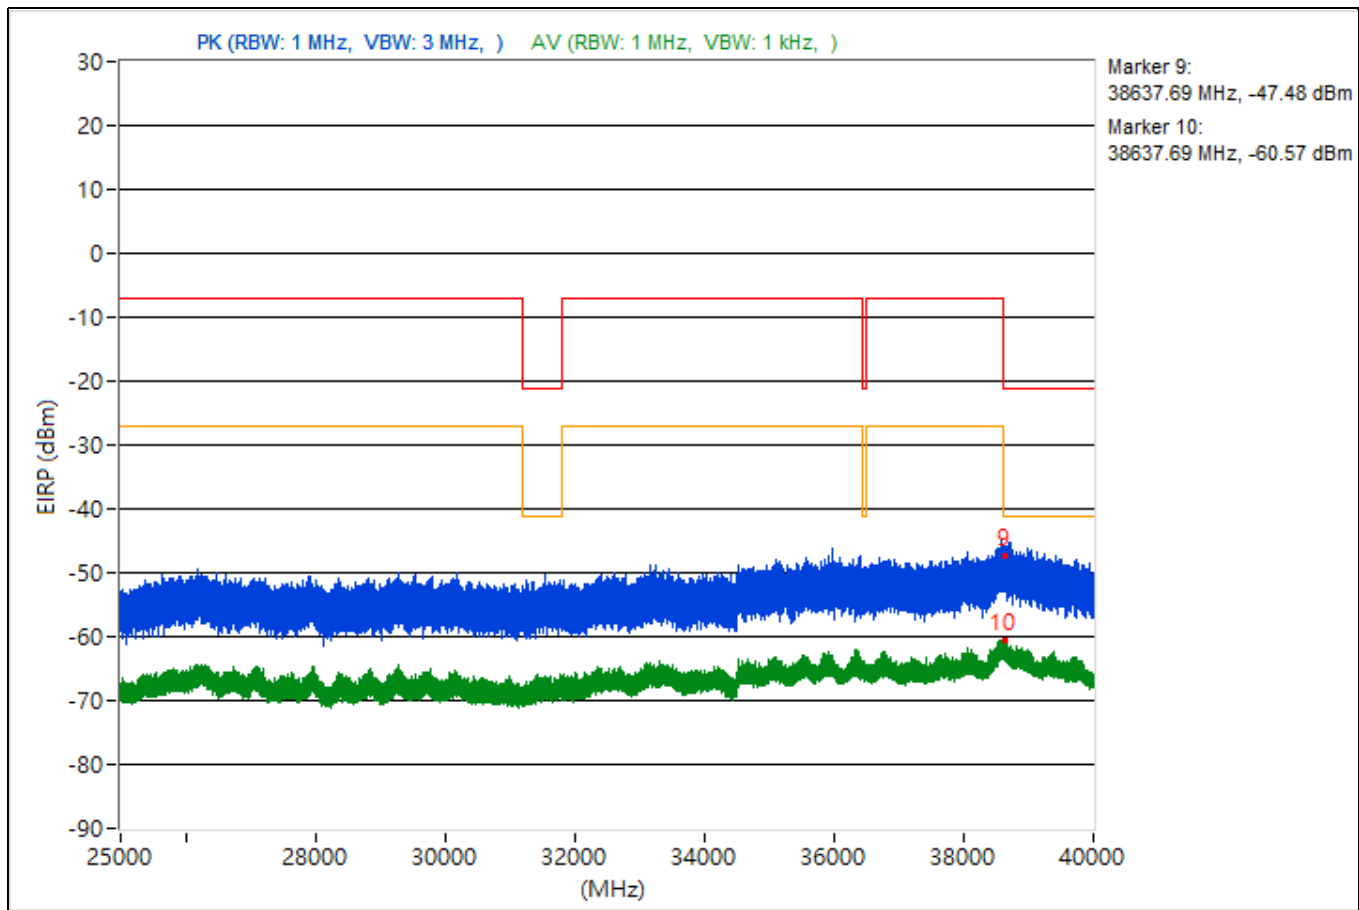


RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3836.56	49.09 PK	74	-24.91	-55.91	-52.82	4.92	-46.17
2	3836.56	37.43 AV	54	-16.57	-64.54	-67.46	4.92	-57.83
3	14489.16	47.08 PK	74	-26.92	-56.61	-55.67	4.92	-48.18
4	14489.16	37.2 AV	54	-16.8	-65.15	-67.04	4.92	-58.06
5	19045	50.76 PK	74	-23.24	-52.36	-52.49	4.92	-44.5
6	19045	38.3 AV	54	-15.7	-63.43	-67.11	4.92	-56.96
7	22435.3	50.2 PK	74	-23.8	-53.86	-52.27	4.92	-45.06
8	22435.3	38.93 AV	54	-15.07	-67.89	-62.31	4.92	-56.33
9	38617.07	44.67 PK	74	-29.33	-58	-59.11	4.92	-50.59
10	38617.07	35.03 AV	54	-18.97	-66.7	-70.37	4.92	-60.23

Note: Margin value = Emission Level - Limit value

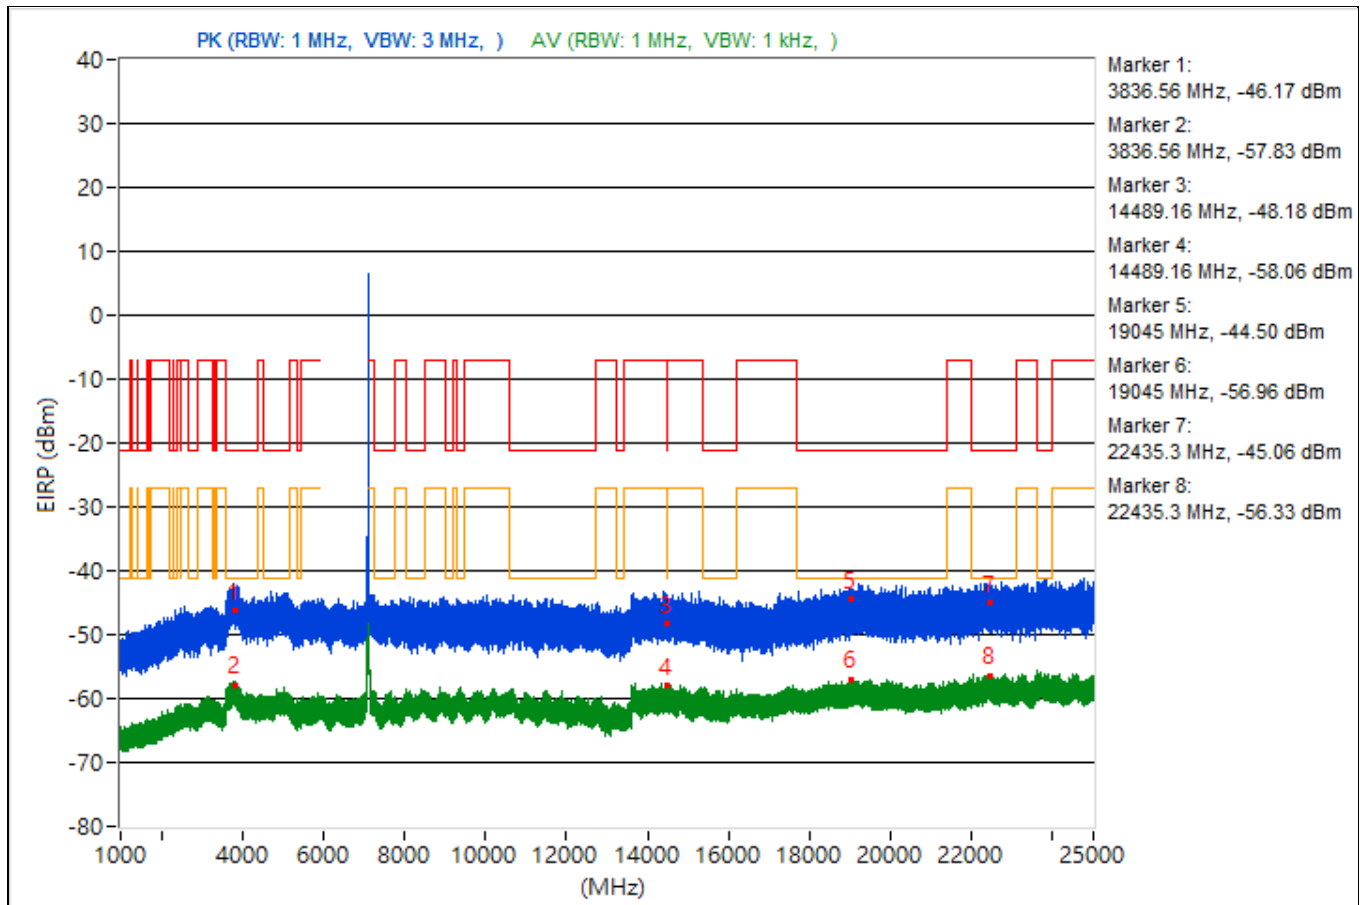


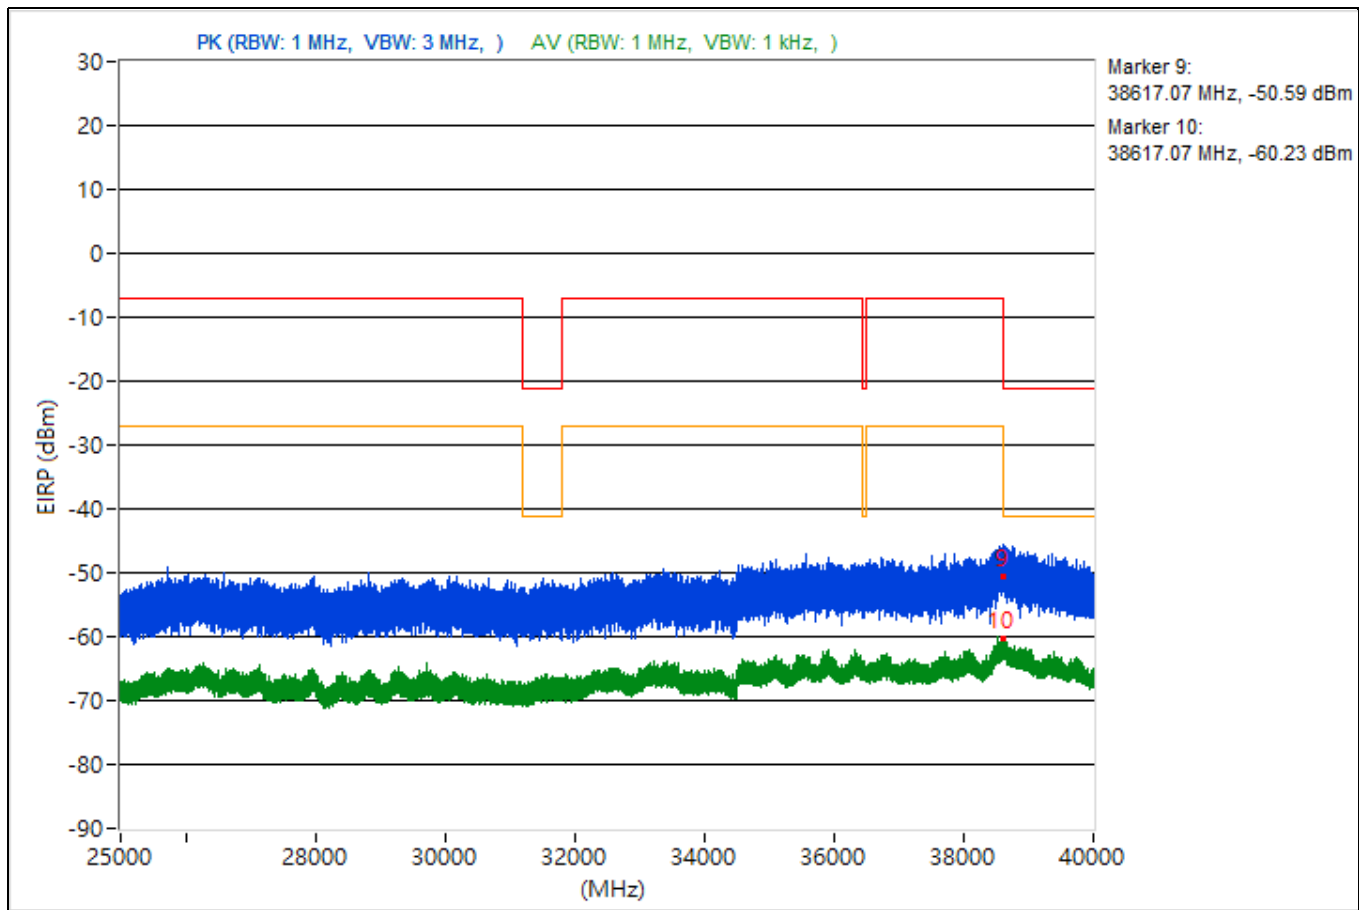


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3780.09	51.19 PK	74	-22.81	-55.07	-50.22	4.92	-44.07
2	3780.09	37.98 AV	54	-16.02	-64.37	-66.25	4.92	-57.28
3	14474.13	48.39 PK	74	-25.61	-54.52	-55.09	4.92	-46.87
4	14474.13	37.2 AV	54	-16.8	-64.92	-67.41	4.92	-58.06
5	18885.2	50.12 PK	74	-23.88	-55.23	-51.64	4.92	-45.14
6	18885.2	38.05 AV	54	-15.95	-63.7	-67.31	4.92	-57.21
7	23645.2	50.99 PK	74	-23.01	-51.1	-53.68	4.92	-44.27
8	23645.2	39.08 AV	54	-14.92	-66.41	-62.61	4.92	-56.18
9	38600.44	44.66 PK	74	-29.34	-59.01	-58.1	4.92	-50.6
10	38600.44	35.03 AV	54	-18.97	-67.59	-68.82	4.92	-60.23

Note: Margin value = Emission Level - Limit value

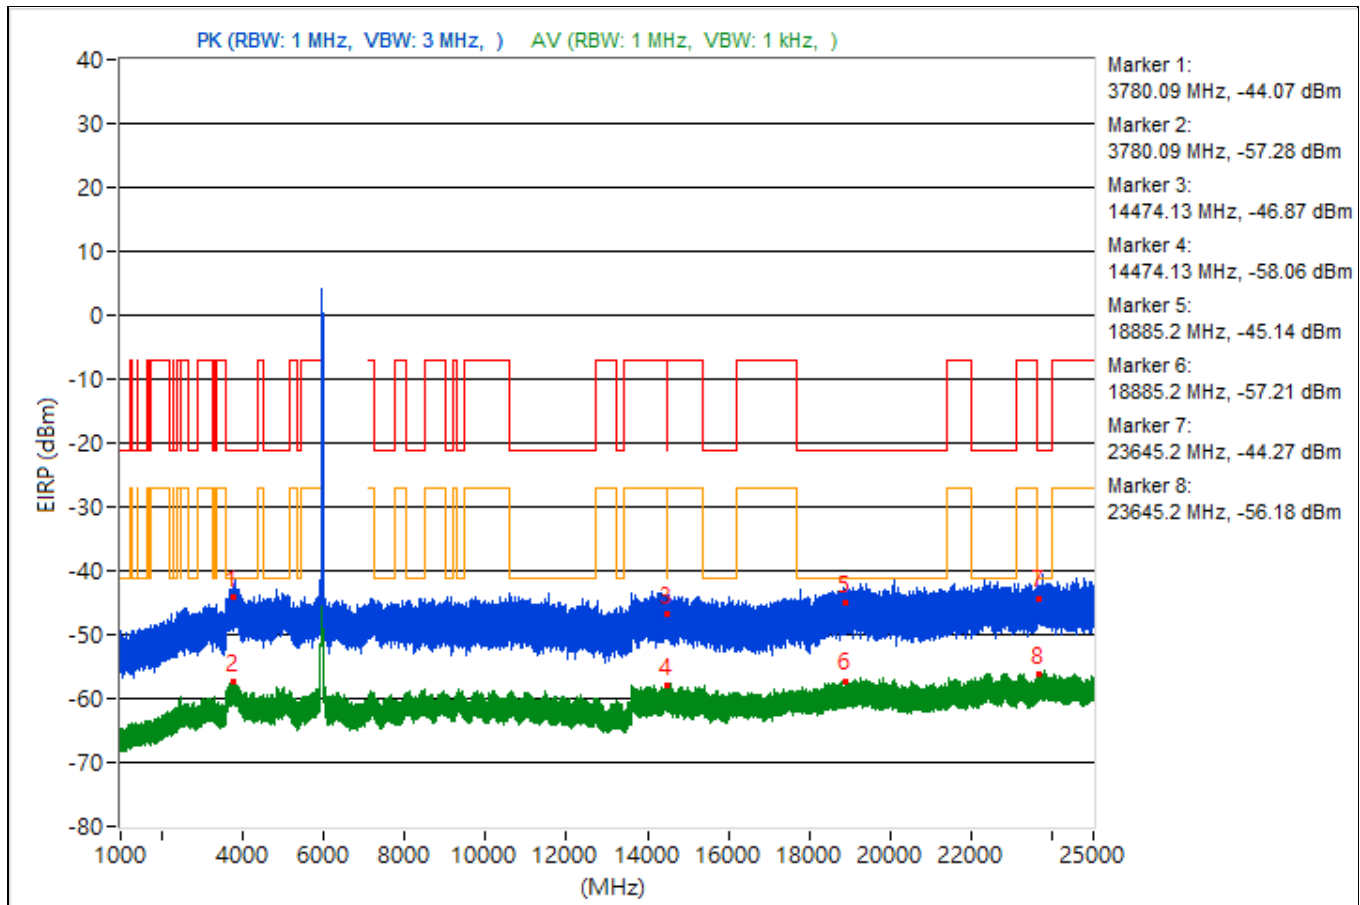


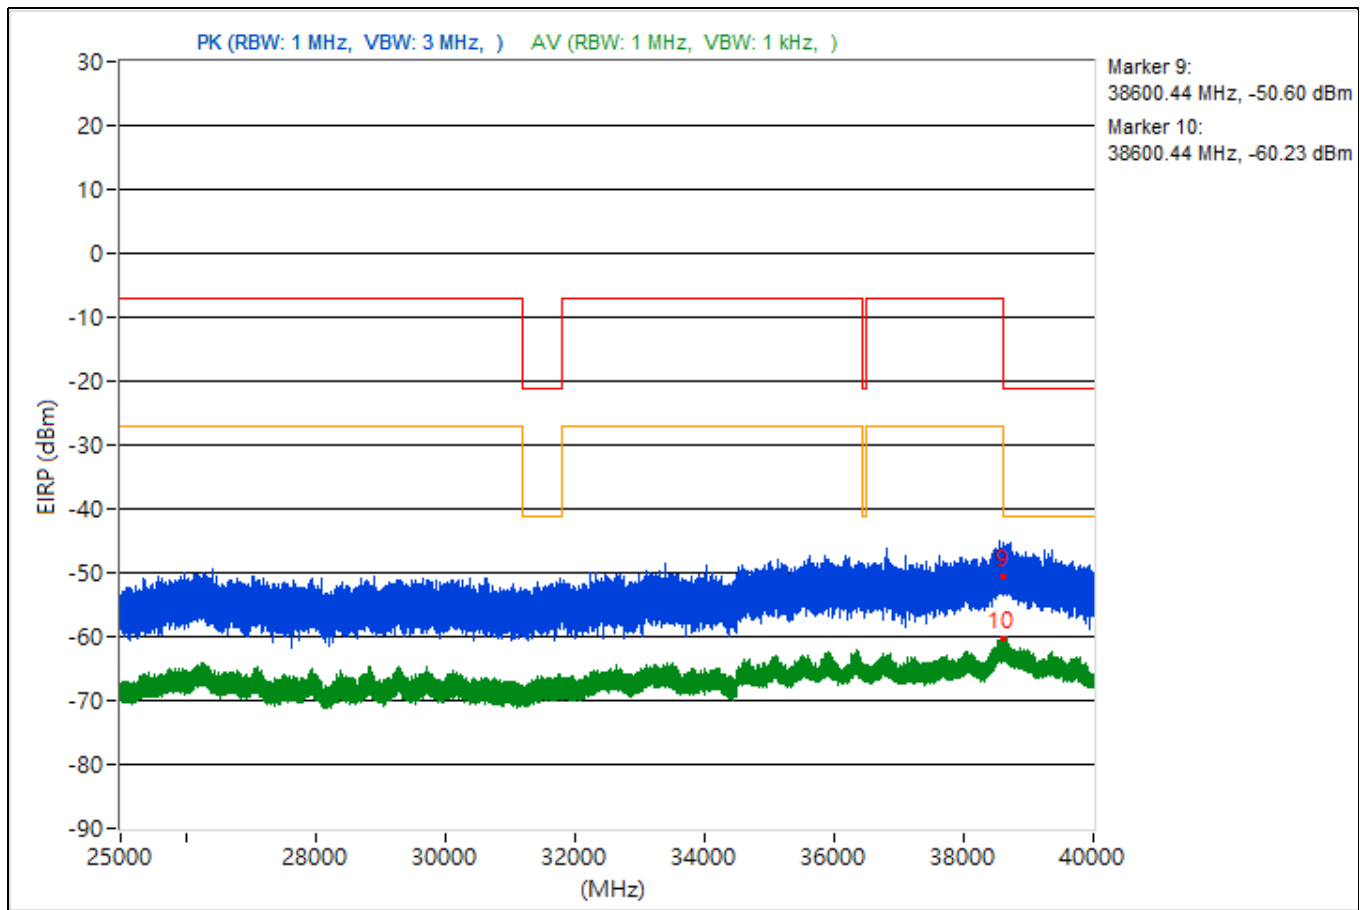


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3863.23	49.47 PK	74	-24.53	-53.89	-53.55	4.92	-45.79
2	3863.23	37.53 AV	54	-16.47	-67.54	-64.35	4.92	-57.73
3	14493.6	48.88 PK	74	-25.12	-54.89	-53.79	4.92	-46.38
4	14493.6	36.75 AV	54	-17.25	-65.38	-67.83	4.92	-58.51
5	20003.7	46.31 PK	74	-27.69	-58.87	-55.52	4.92	-48.95
6	20003.7	38.61 AV	54	-15.39	-63.52	-65.98	4.92	-56.65
7	23775.2	51.67 PK	74	-22.33	-50.75	-52.46	4.92	-43.59
8	23775.2	39.51 AV	54	-14.49	-63.17	-64.24	4.92	-55.75
9	38603.56	44.67 PK	74	-29.33	-59.5	-57.72	4.92	-50.59
10	38603.56	35.31 AV	54	-18.69	-68.26	-67.54	4.92	-59.95

Note: Margin value = Emission Level - Limit value

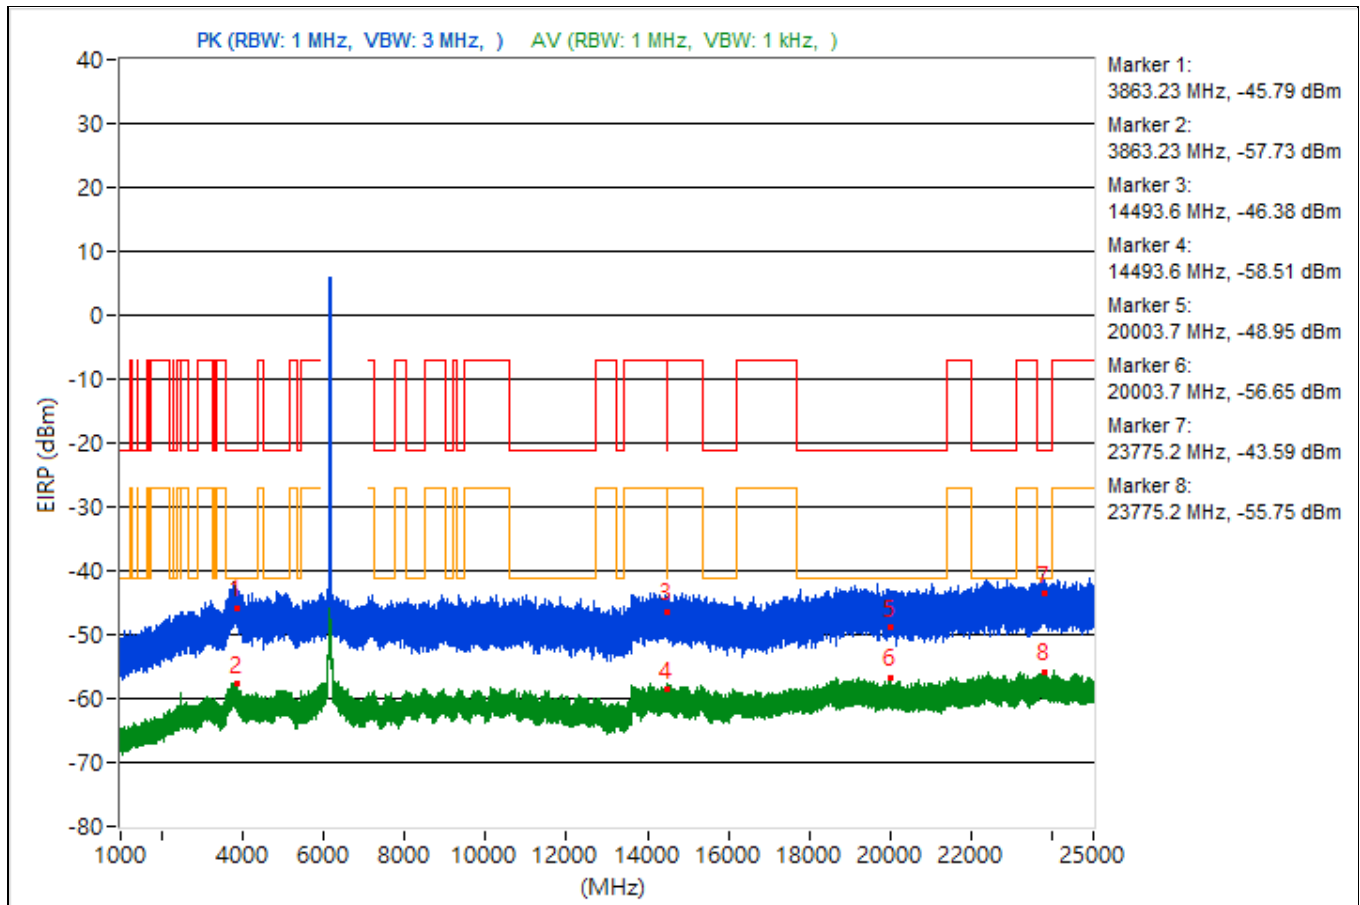


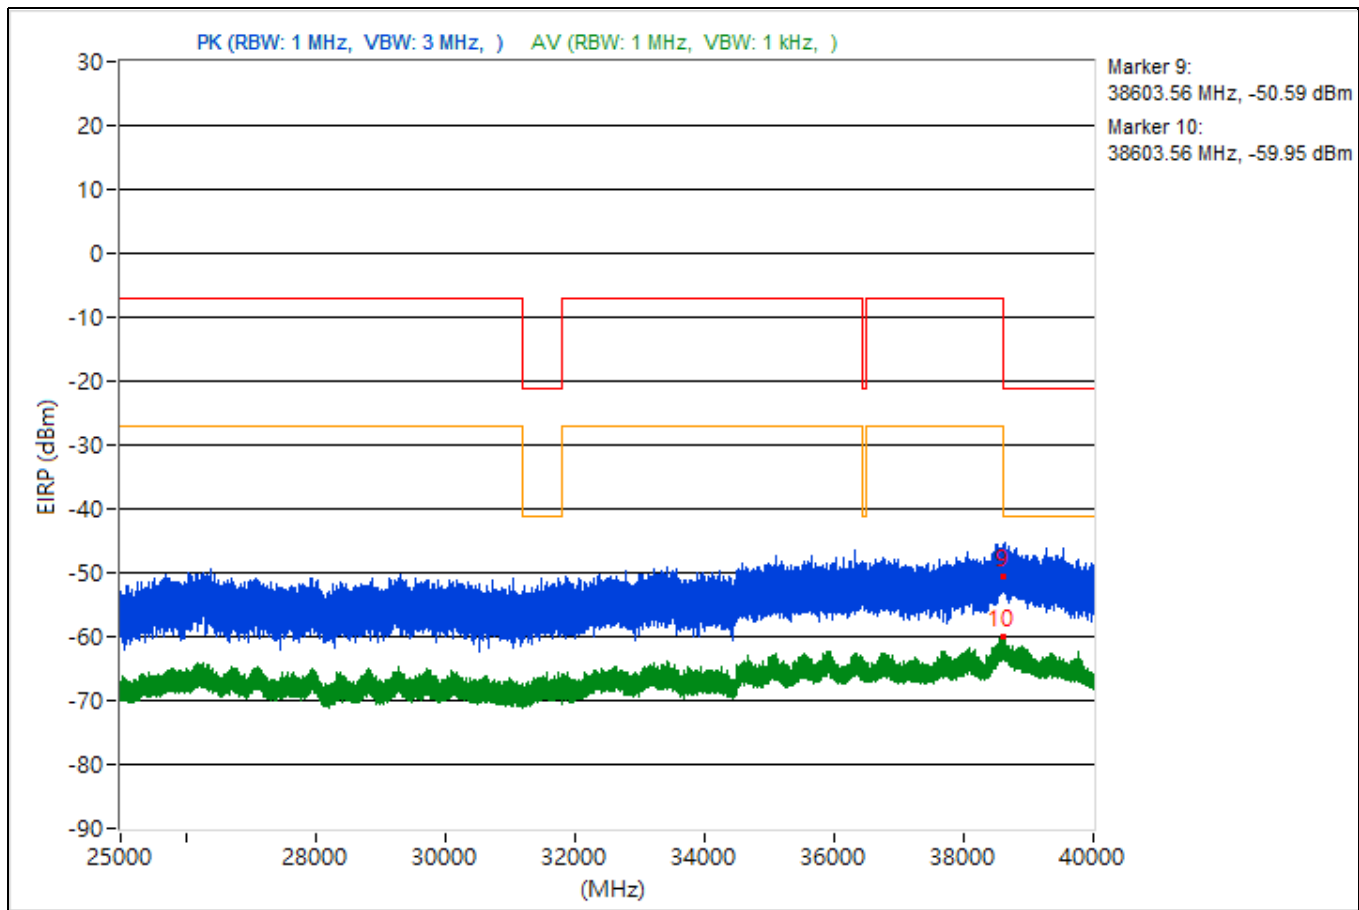


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3835.54	48.77 PK	74	-25.23	-54.71	-54.14	4.92	-46.49
2	3835.54	37.64 AV	54	-16.36	-64.72	-66.57	4.92	-57.62
3	9331.64	45.33 PK	74	-28.67	-56.33	-60.26	4.92	-49.93
4	9331.64	36.99 AV	54	-17.01	-67.87	-64.99	4.92	-58.27
5	19235.4	48 PK	74	-26	-56.25	-54.34	4.92	-47.26
6	19235.4	38.21 AV	54	-15.79	-67.77	-63.29	4.92	-57.05
7	22417.1	48.92 PK	74	-25.08	-53.04	-56.02	4.92	-46.34
8	22417.1	38.91 AV	54	-15.09	-62.57	-67.15	4.92	-56.35
9	38649.78	47.55 PK	74	-26.45	-57.93	-54.15	4.92	-47.71
10	38649.78	34.87 AV	54	-19.13	-69.72	-67.26	4.92	-60.39

Note: Margin value = Emission Level - Limit value

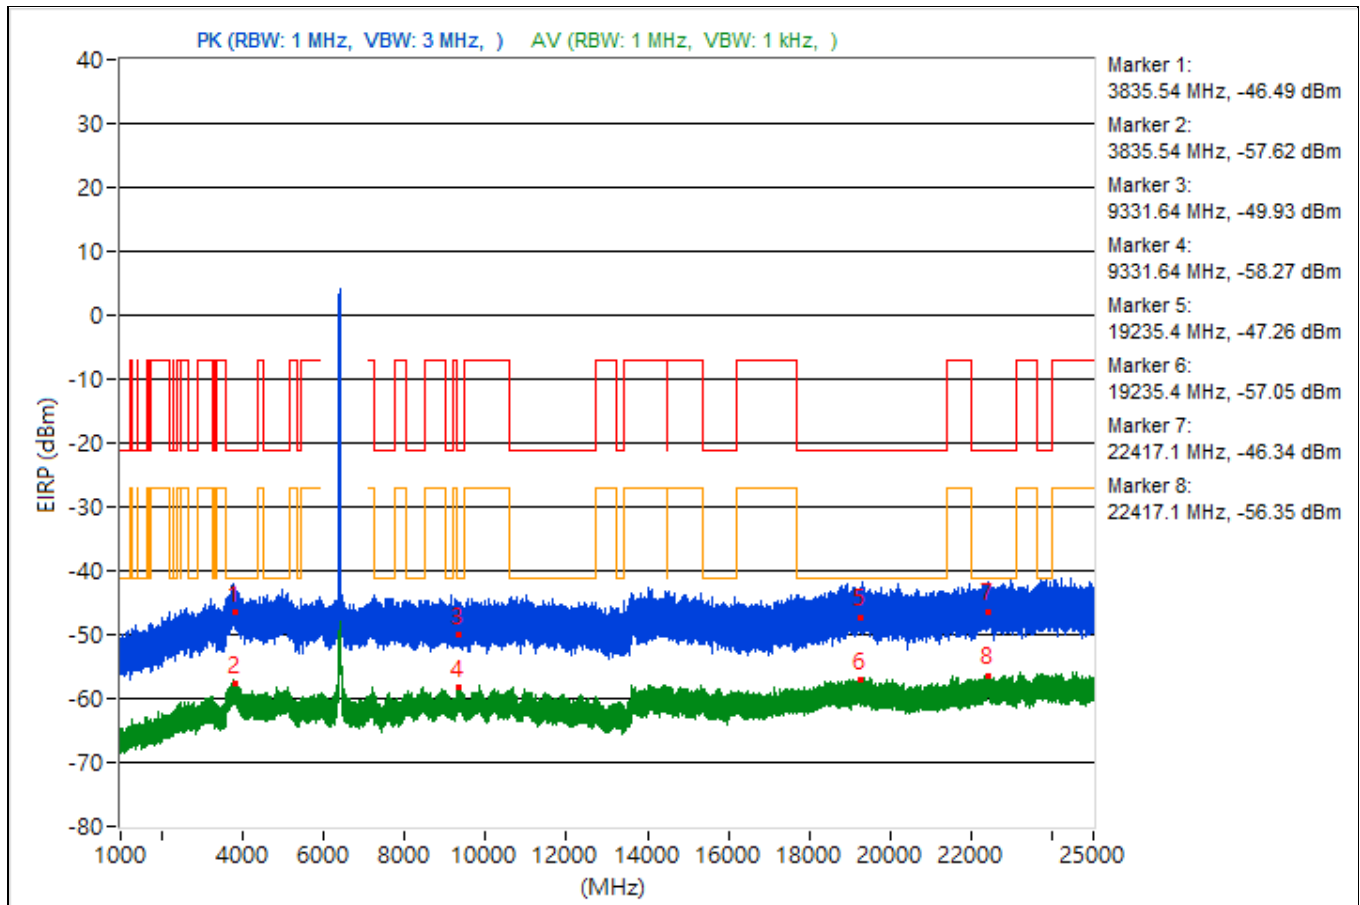


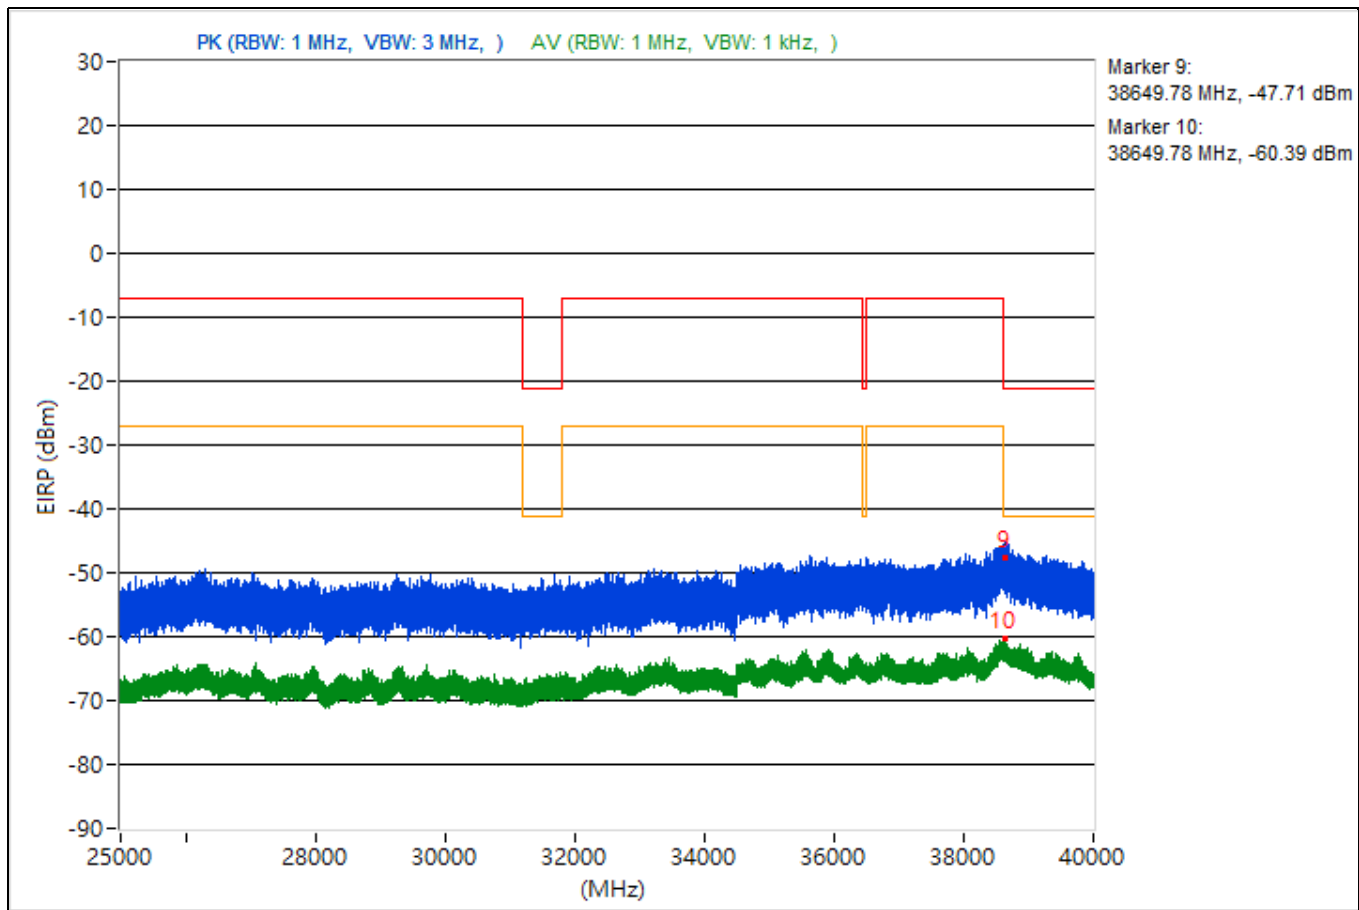


RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3815.56	51.25 PK	74	-22.75	-50.3	-54.61	4.92	-44.01
2	3815.56	37.5 AV	54	-16.5	-68.19	-64.12	4.92	-57.76
3	14475.29	47.58 PK	74	-26.42	-54.61	-56.91	4.92	-47.68
4	14475.29	37.45 AV	54	-16.55	-67.01	-64.76	4.92	-57.81
5	19046.2	50.9 PK	74	-23.1	-53.8	-51.17	4.92	-44.36
6	19046.2	38.21 AV	54	-15.79	-63.72	-66.76	4.92	-57.05
7	22350.7	48.3 PK	74	-25.7	-53.42	-57.14	4.92	-46.96
8	22350.7	39.51 AV	54	-14.49	-62.93	-64.59	4.92	-55.75
9	38601.42	45.16 PK	74	-28.84	-57.86	-58.21	4.92	-50.1
10	38601.42	34.99 AV	54	-19.01	-66.59	-70.78	4.92	-60.27

Note: Margin value = Emission Level - Limit value

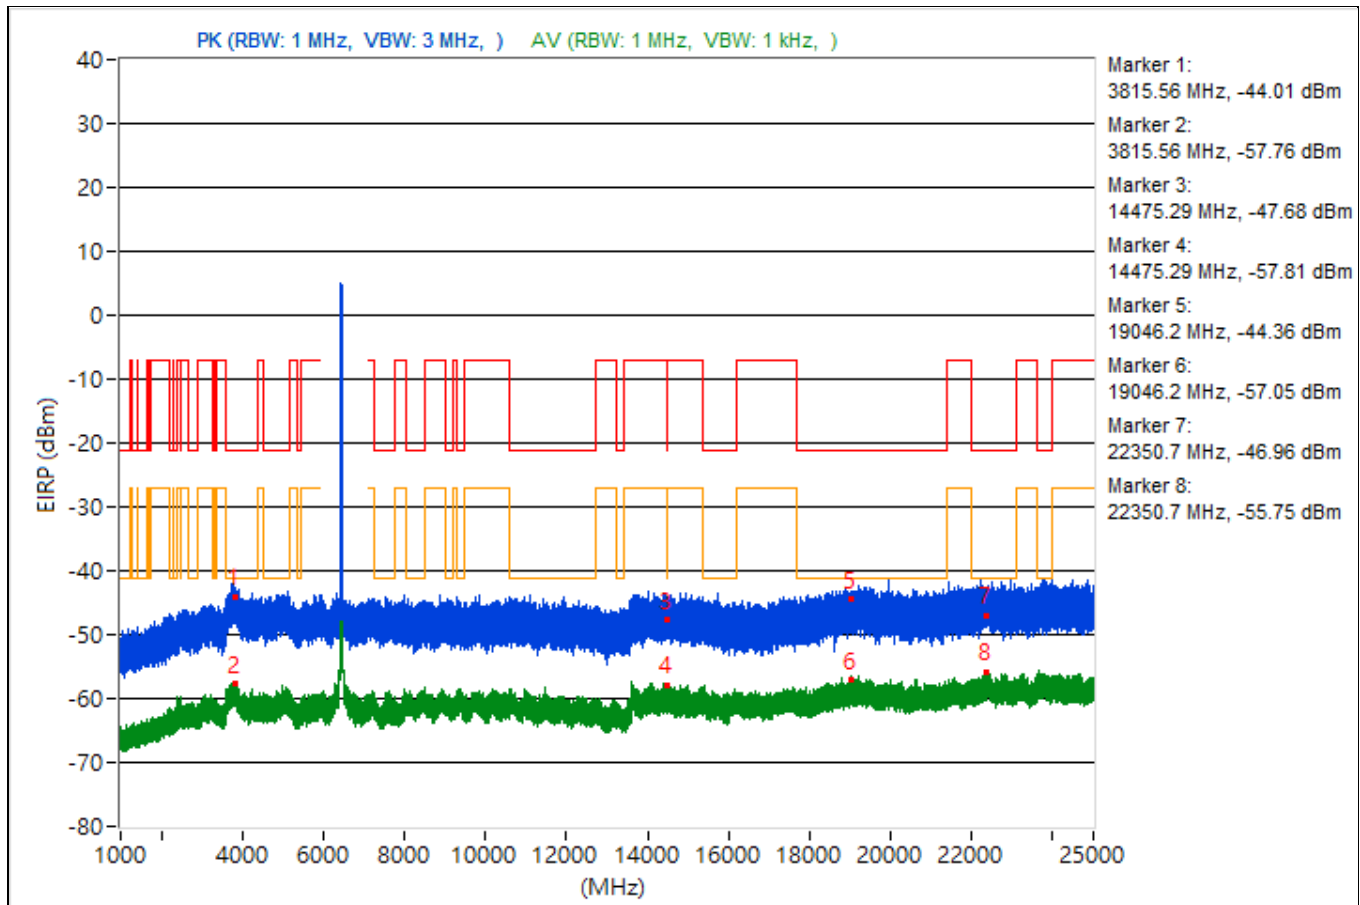


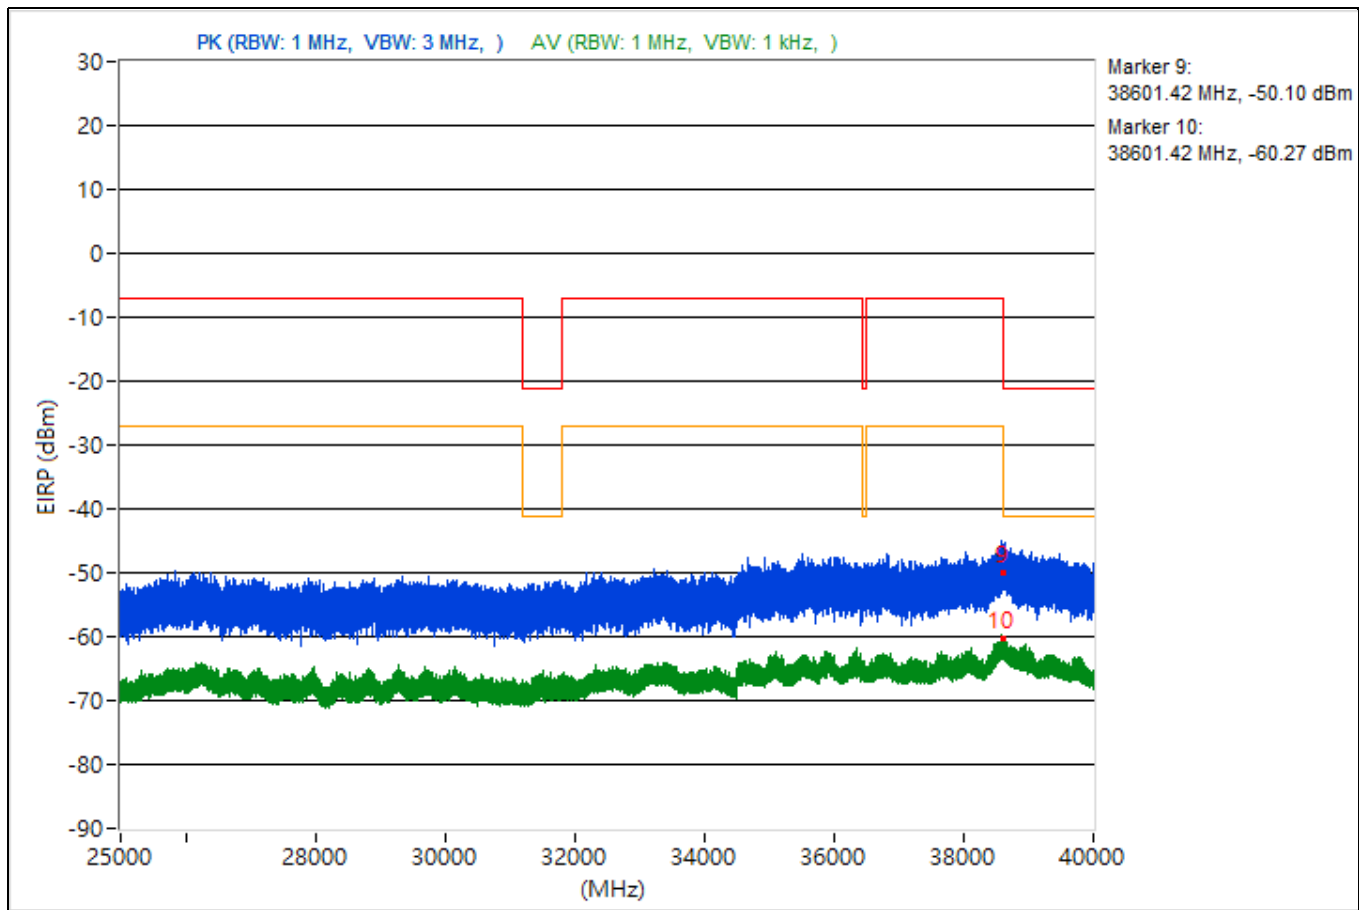


RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3770.44	50.75 PK	74	-23.25	-52.35	-52.52	4.92	-44.51
2	3770.44	37.65 AV	54	-16.35	-67.67	-64.12	4.92	-57.61
3	14474.22	46.17 PK	74	-27.83	-58.03	-56.21	4.92	-49.09
4	14474.22	37.31 AV	54	-16.69	-64.61	-67.7	4.92	-57.95
5	19107.2	46.09 PK	74	-27.91	-56.74	-57.48	4.92	-49.17
6	19107.2	38.65 AV	54	-15.35	-65.69	-63.63	4.92	-56.61
7	23749.3	49.39 PK	74	-24.61	-53.03	-54.75	4.92	-45.87
8	23749.3	39.33 AV	54	-14.67	-62.85	-65.18	4.92	-55.93
9	38612.27	47.37 PK	74	-26.63	-54.8	-57.15	4.92	-47.89
10	38612.27	34.76 AV	54	-19.24	-69.49	-67.57	4.92	-60.5

Note: Margin value = Emission Level - Limit value

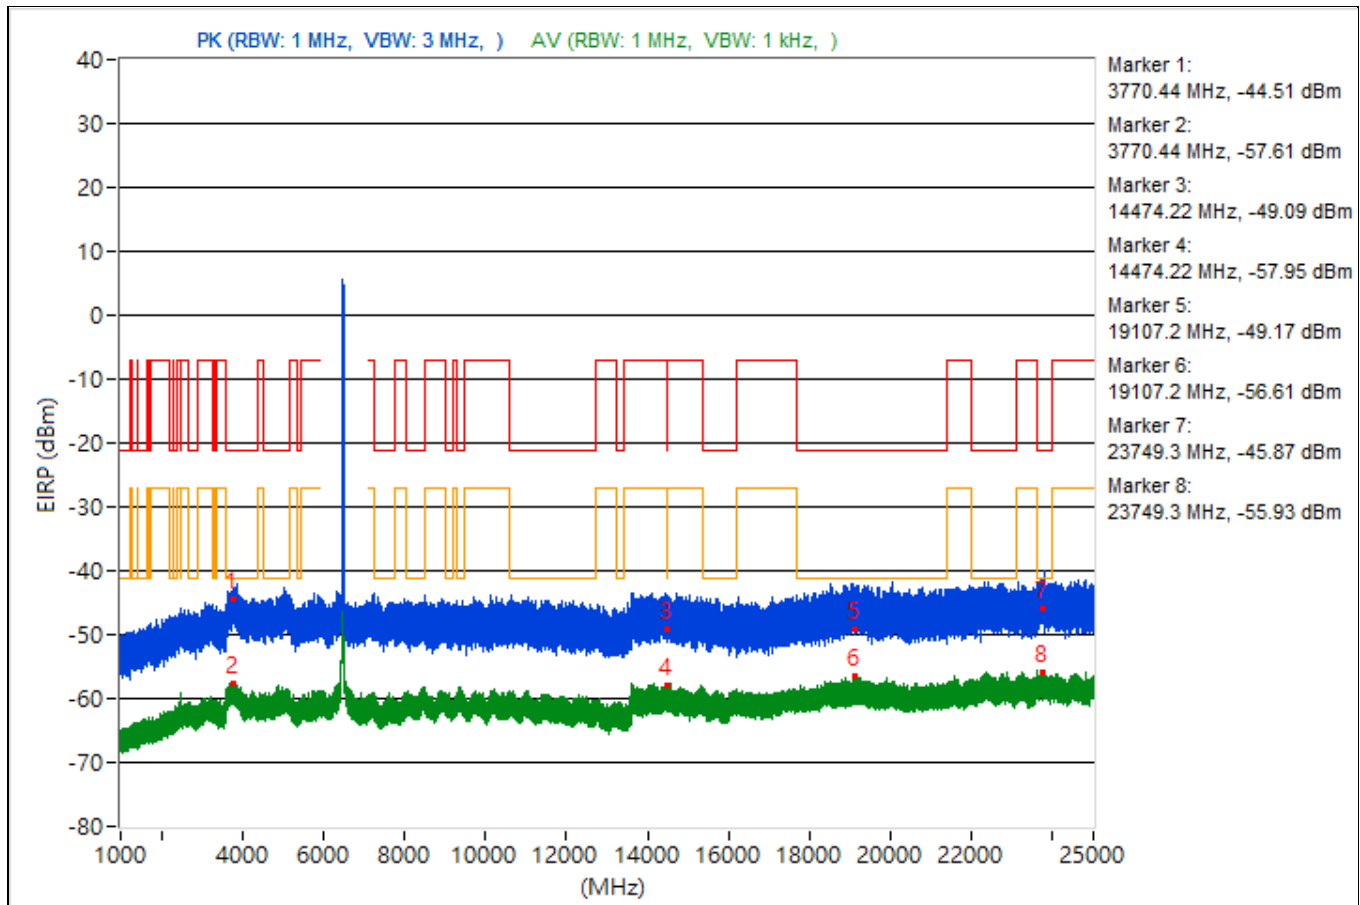


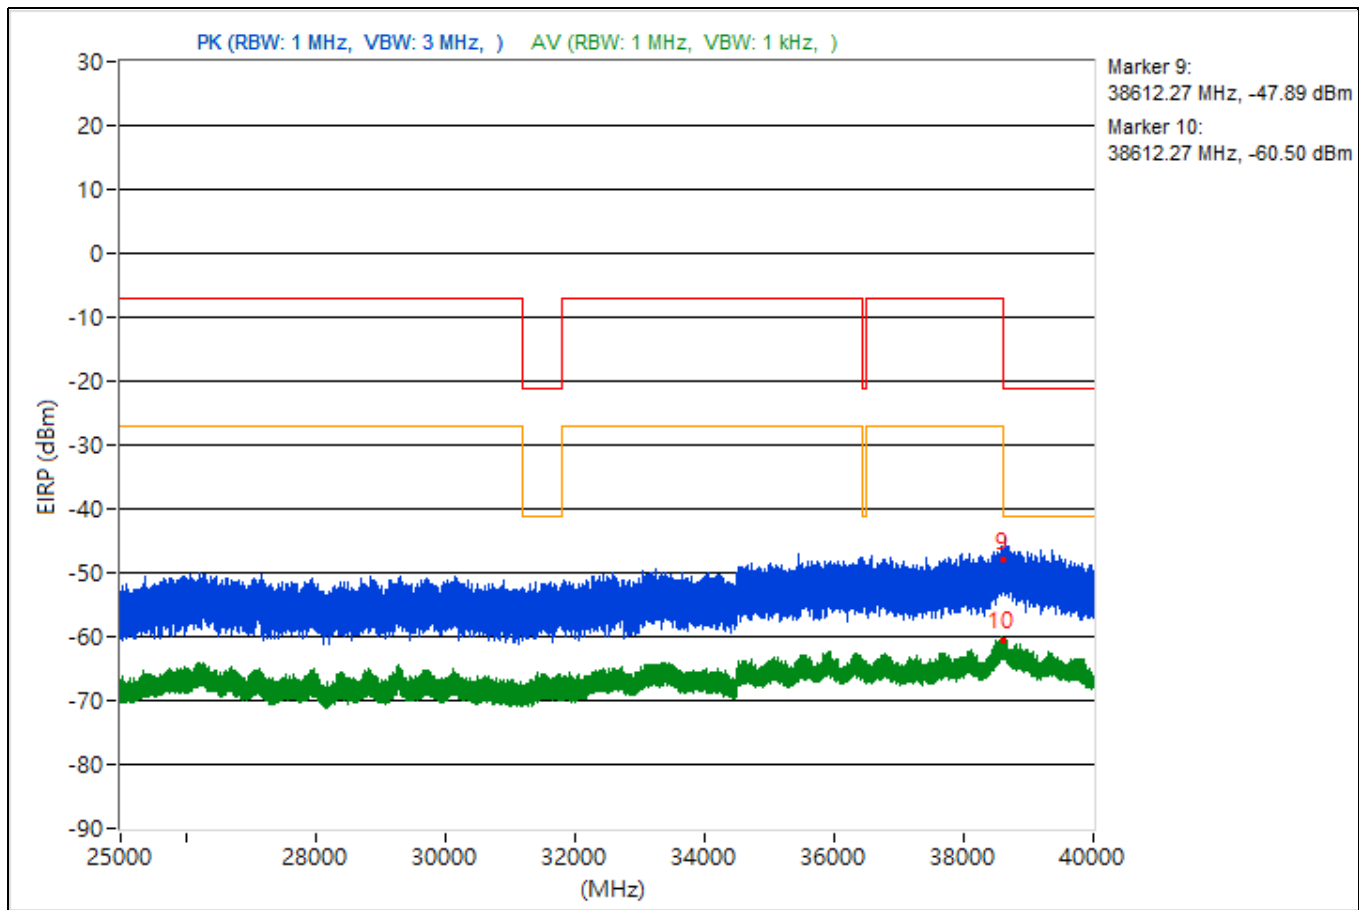


RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3700.68	49.27 PK	74	-24.73	-52.69	-55.66	4.92	-45.99
2	3700.68	37.51 AV	54	-16.49	-67.16	-64.58	4.92	-57.75
3	15370.49	46.64 PK	74	-27.36	-55.13	-58.66	4.92	-48.62
4	15370.49	37 AV	54	-17	-67.65	-65.1	4.92	-58.26
5	18976.6	47.29 PK	74	-26.71	-56.49	-55.39	4.92	-47.97
6	18976.6	38.11 AV	54	-15.89	-68.2	-63.28	4.92	-57.15
7	23759.1	48.9 PK	74	-25.1	-55.83	-53.15	4.92	-46.36
8	23759.1	39.09 AV	54	-14.91	-63.23	-65.19	4.92	-56.17
9	38637.78	46.76 PK	74	-27.24	-57.85	-55.36	4.92	-48.5
10	38637.78	34.62 AV	54	-19.38	-70.16	-67.41	4.92	-60.64

Note: Margin value = Emission Level - Limit value

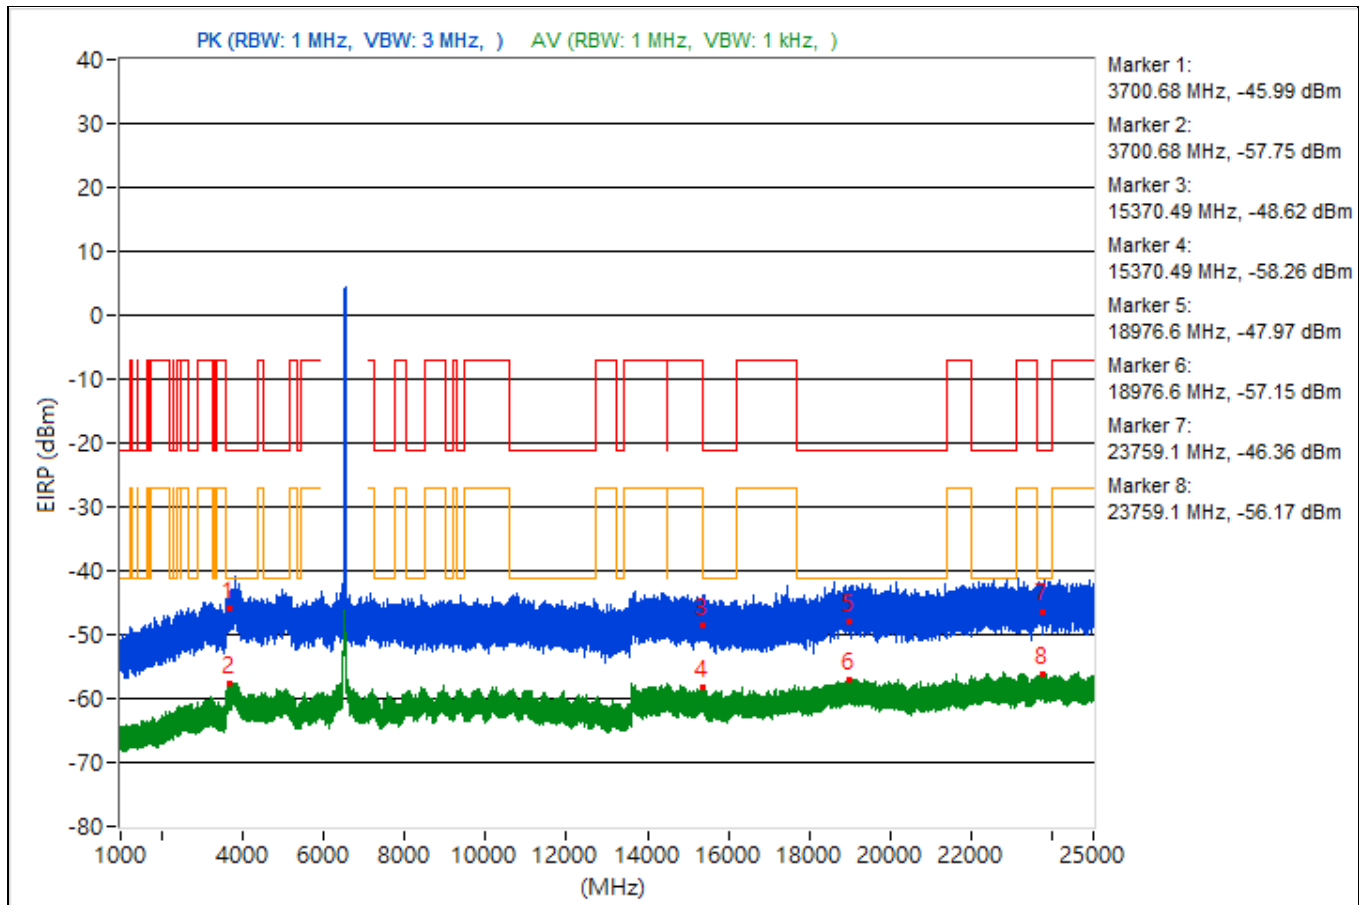


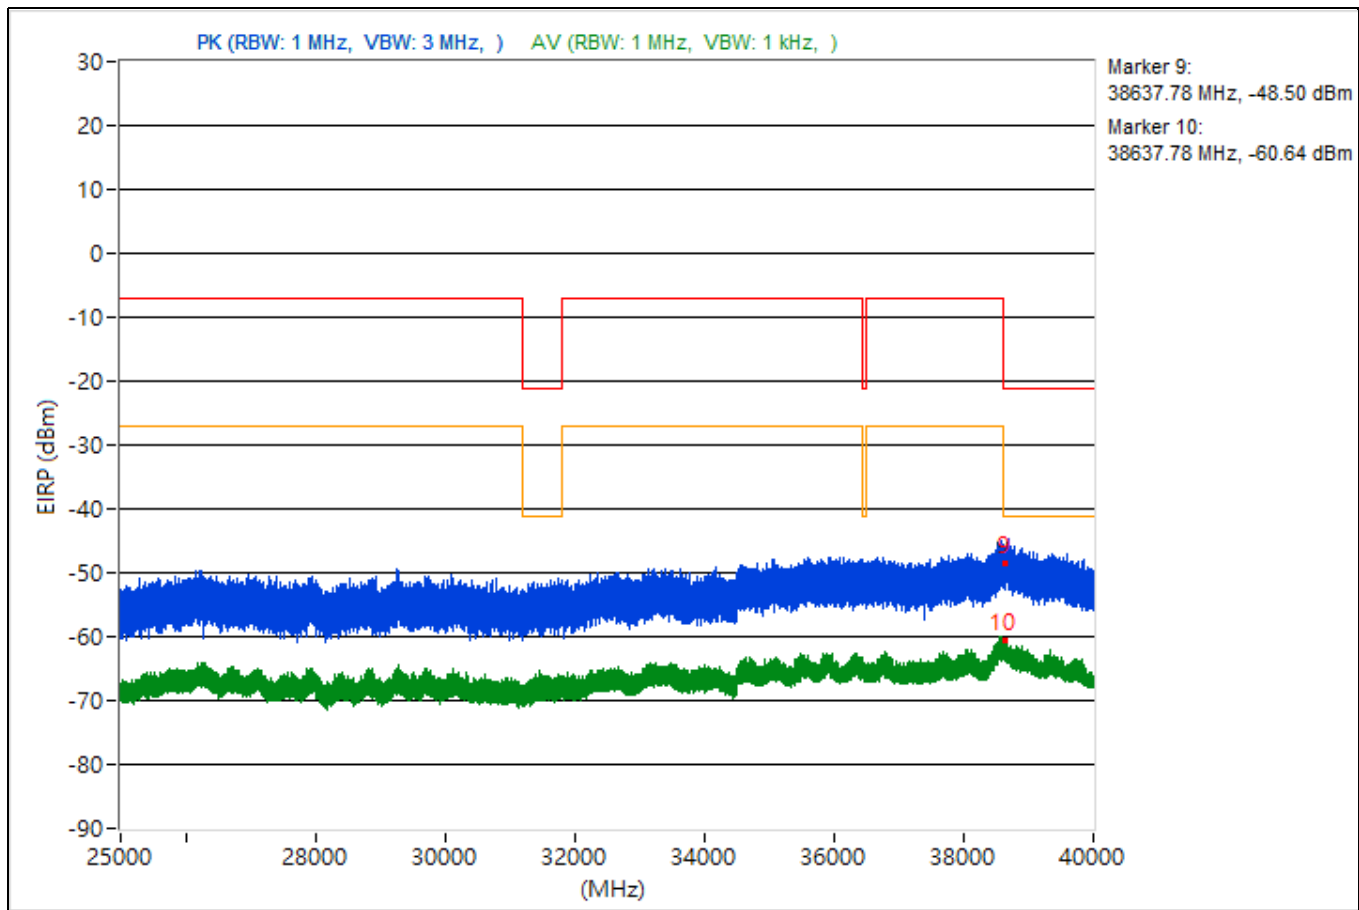


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3802.49	50.6 PK	74	-23.4	-54.02	-51.52	4.92	-44.66
2	3802.49	38.64 AV	54	-15.36	-65.87	-63.54	4.92	-56.62
3	9398.84	46.06 PK	74	-27.94	-56.57	-57.78	4.92	-49.2
4	9398.84	37.38 AV	54	-16.62	-64.98	-66.83	4.92	-57.88
5	19341.4	50.68 PK	74	-23.32	-52.37	-52.65	4.92	-44.58
6	19341.4	38.14 AV	54	-15.86	-63.68	-67.05	4.92	-57.12
7	23792.2	50.96 PK	74	-23.04	-55.11	-50.51	4.92	-44.3
8	23792.2	39.23 AV	54	-14.77	-62.58	-66	4.92	-56.03
9	38662.76	44.46 PK	74	-29.54	-58.42	-59.07	4.92	-50.8
10	38662.76	35.22 AV	54	-18.78	-69.02	-67.13	4.92	-60.04

Note: Margin value = Emission Level - Limit value

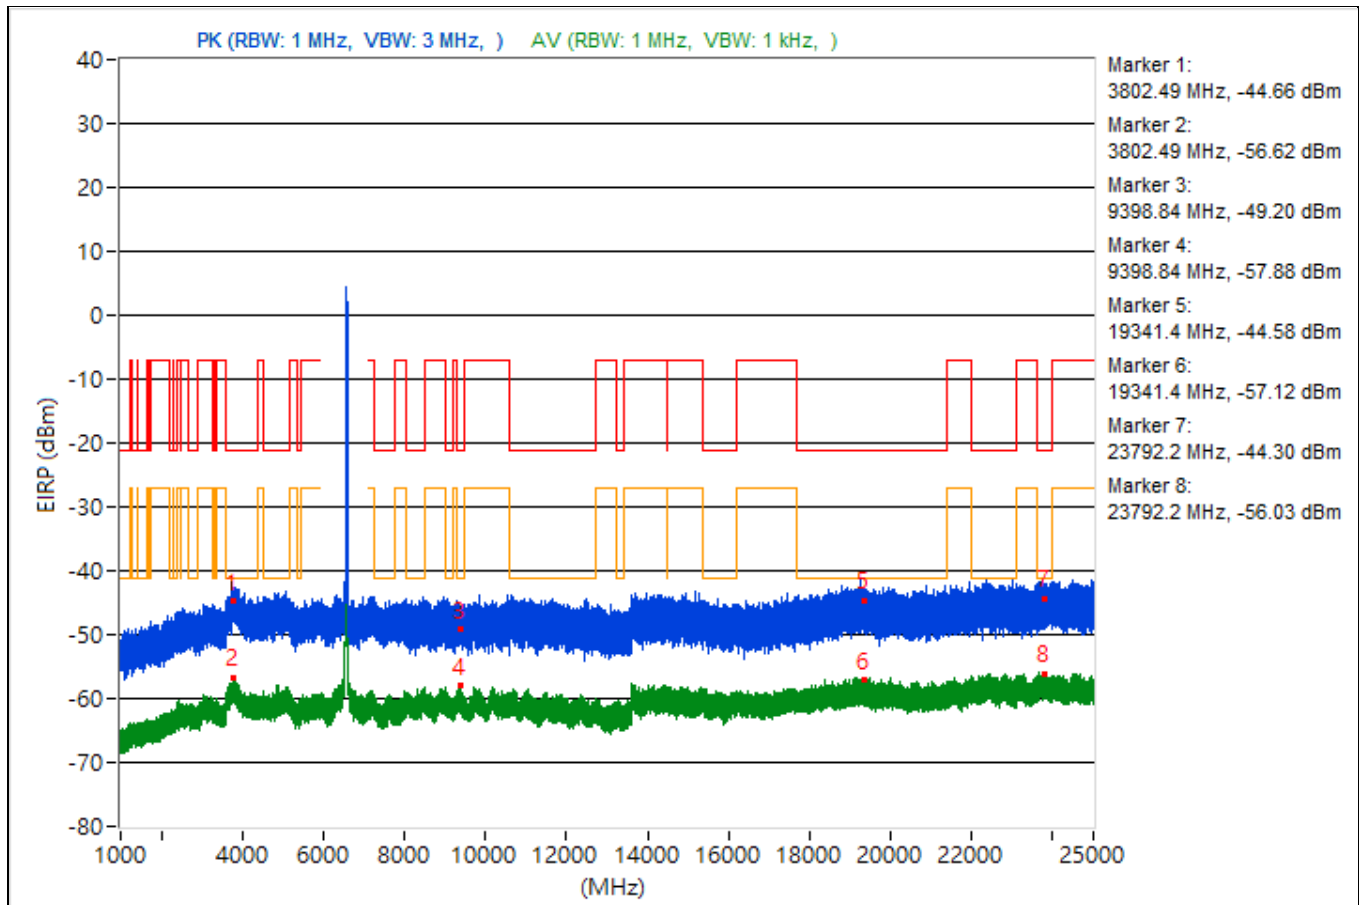


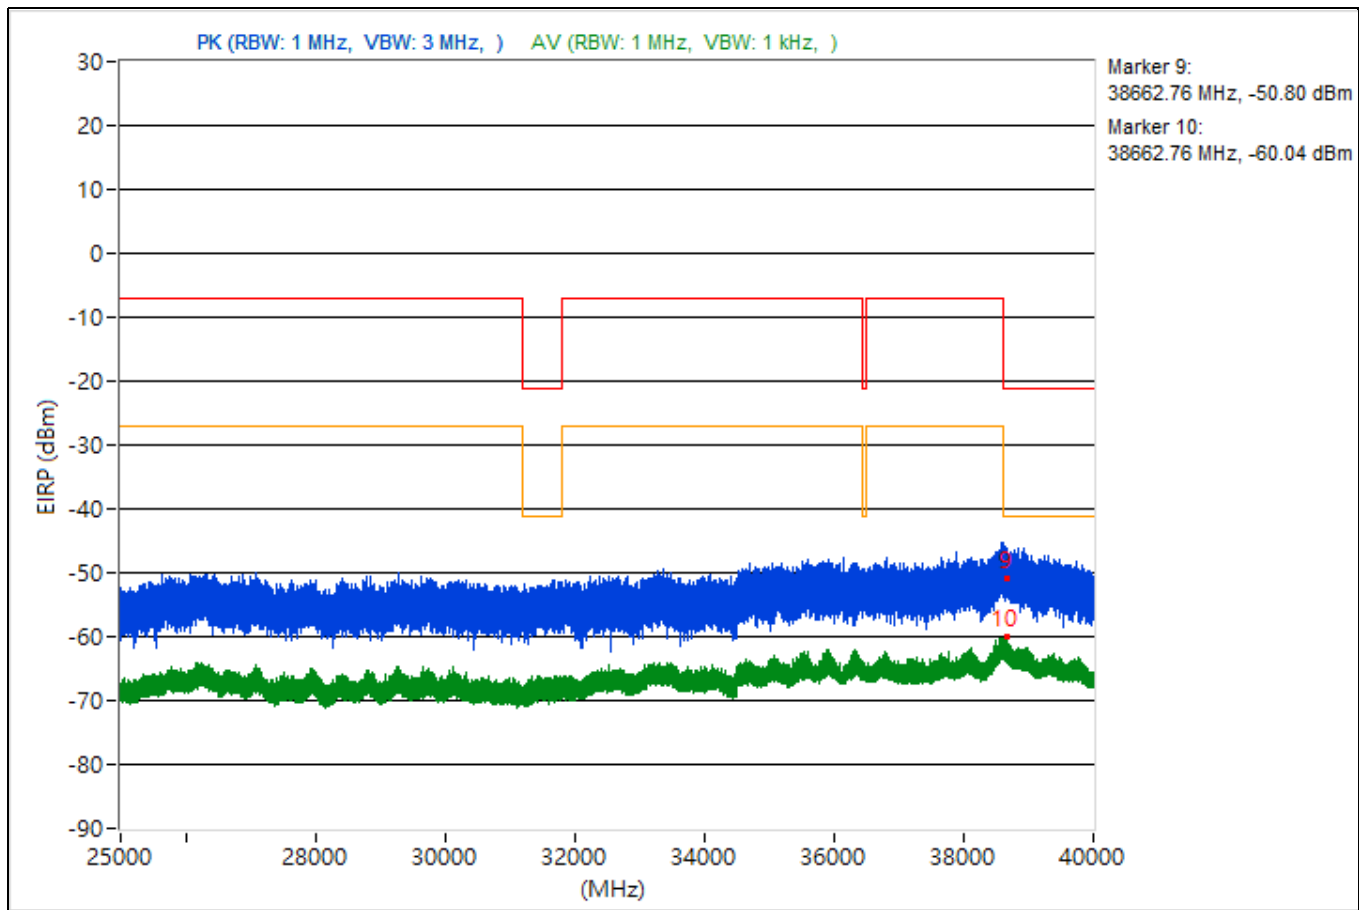


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3786.23	50.02 PK	74	-23.98	-54.09	-52.41	4.92	-45.24
2	3786.23	37.6 AV	54	-16.4	-64.21	-67.61	4.92	-57.66
3	15409.6	45.82 PK	74	-28.18	-57.42	-57.32	4.92	-49.44
4	15409.6	37.15 AV	54	-16.85	-65.12	-67.21	4.92	-58.11
5	20227.4	48.43 PK	74	-25.57	-53.92	-55.81	4.92	-46.83
6	20227.4	38.44 AV	54	-15.56	-66.1	-63.72	4.92	-56.82
7	23675	50.76 PK	74	-23.24	-52.65	-52.22	4.92	-44.5
8	23675	39.61 AV	54	-14.39	-62.87	-64.44	4.92	-55.65
9	38656.27	45.68 PK	74	-28.32	-58.78	-56.54	4.92	-49.58
10	38656.27	35.6 AV	54	-18.4	-67.25	-67.95	4.92	-59.66

Note: Margin value = Emission Level - Limit value

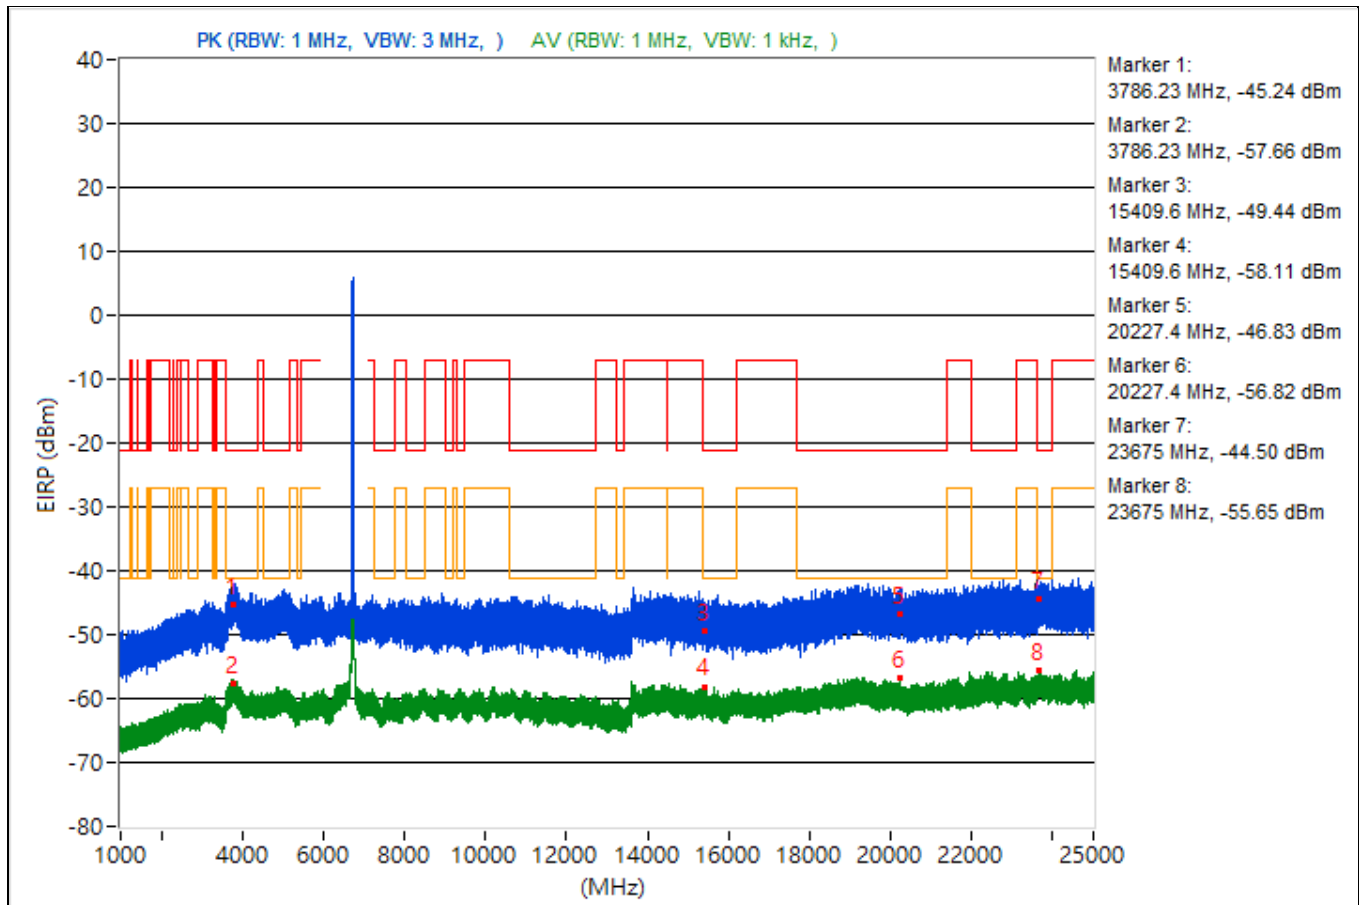


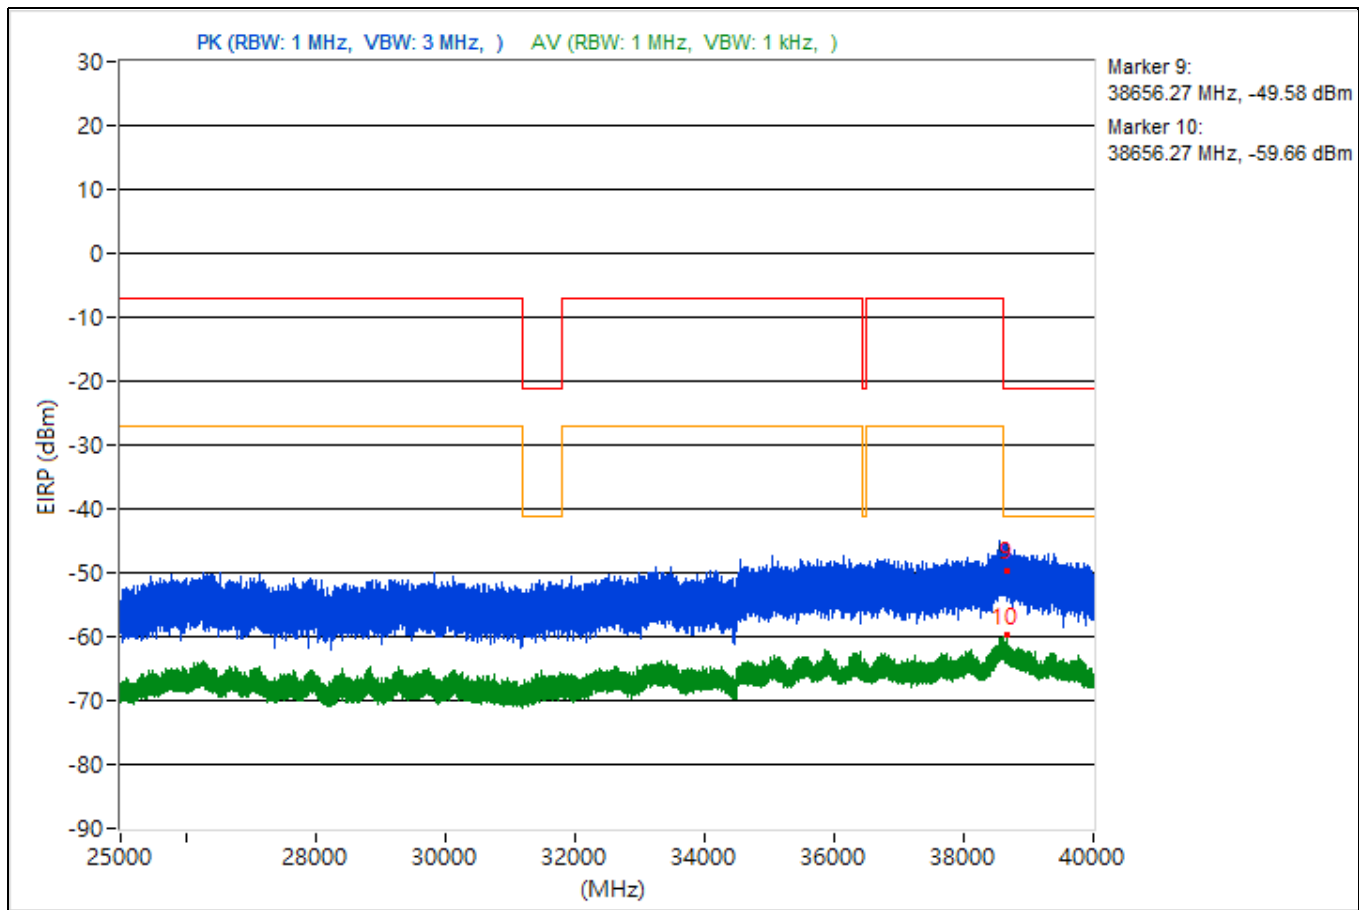


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3790.59	49.57 PK	74	-24.43	-51.78	-56.84	4.92	-45.69
2	3790.59	37.69 AV	54	-16.31	-66.87	-64.46	4.92	-57.57
3	14484.62	47.63 PK	74	-26.37	-57.3	-54.32	4.92	-47.63
4	14484.62	36.58 AV	54	-17.42	-65.13	-68.89	4.92	-58.68
5	19203.4	49.33 PK	74	-24.67	-55.25	-52.81	4.92	-45.93
6	19203.4	38.04 AV	54	-15.96	-63.44	-68	4.92	-57.22
7	22357.4	49.67 PK	74	-24.33	-55.22	-52.29	4.92	-45.59
8	22357.4	39.41 AV	54	-14.59	-62.67	-65.28	4.92	-55.85
9	38604.44	46.32 PK	74	-27.68	-62.57	-54.48	4.92	-48.94
10	38604.44	35.03 AV	54	-18.97	-70.42	-66.68	4.92	-60.23

Note: Margin value = Emission Level - Limit value

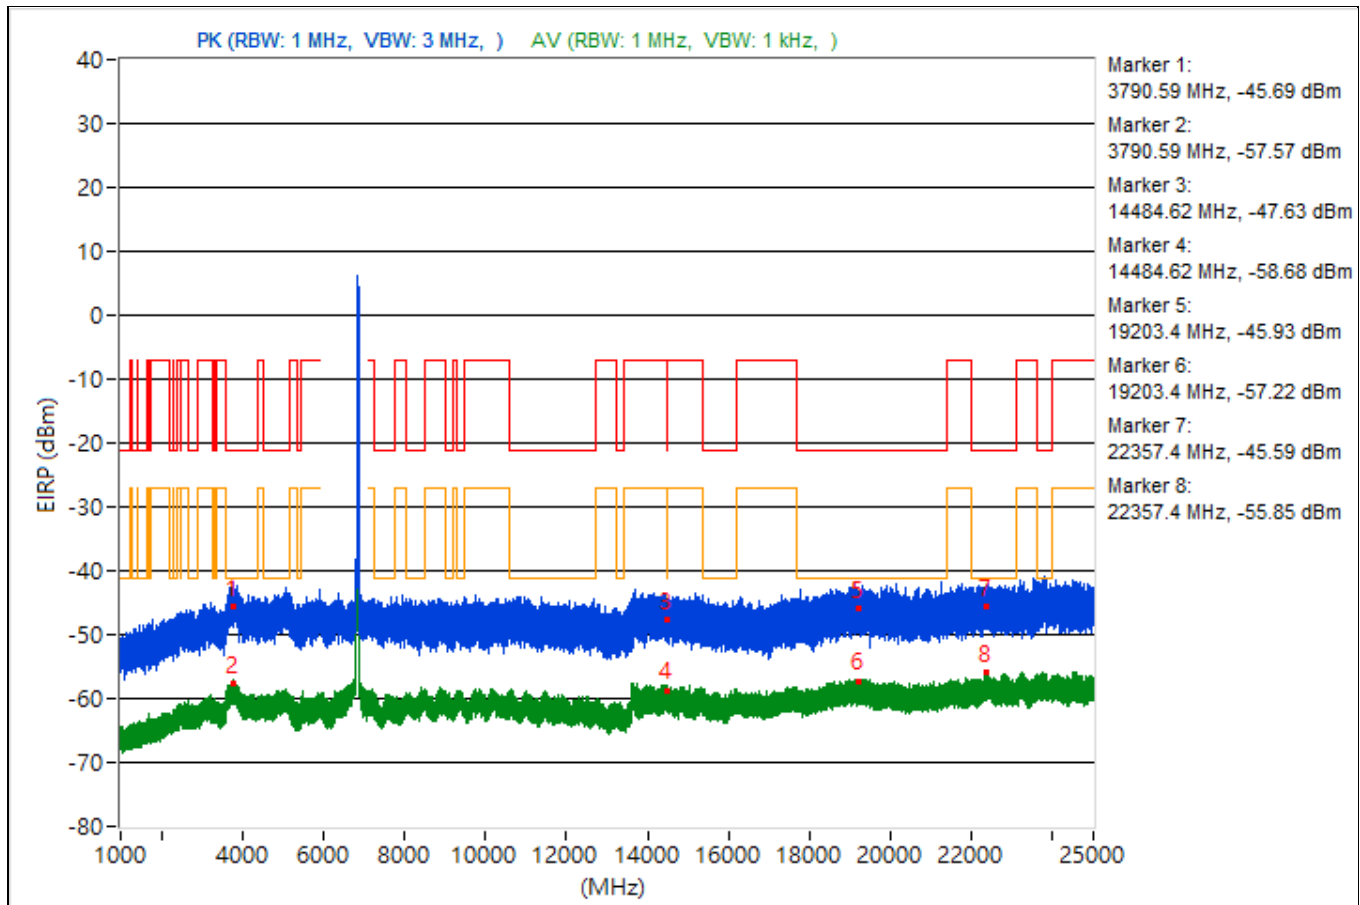


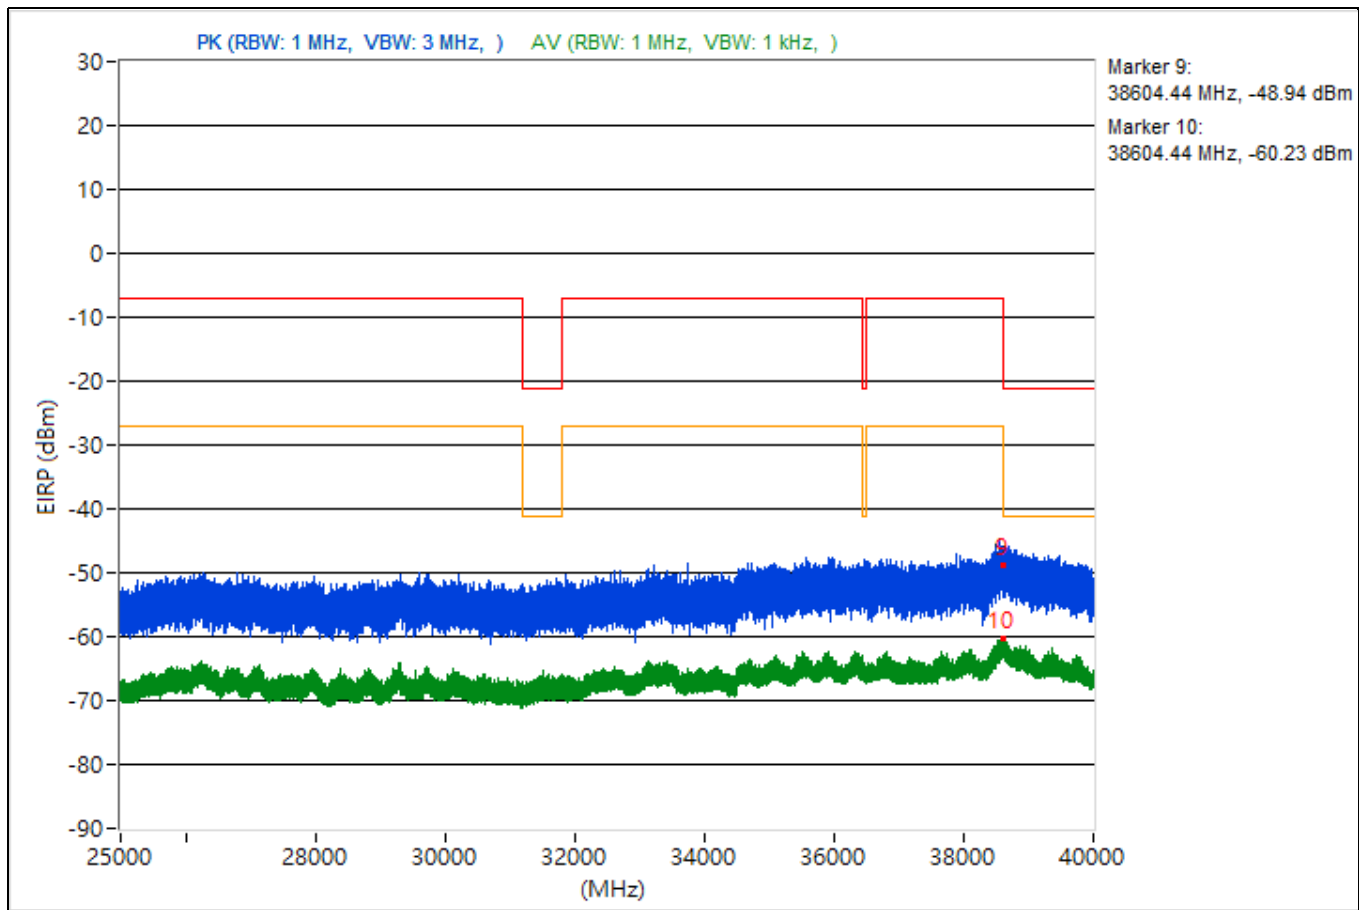


RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3758.16	49.78 PK	74	-24.22	-54.51	-52.53	4.92	-45.48
2	3758.16	37.91 AV	54	-16.09	-66.99	-64.06	4.92	-57.35
3	14499.02	46.26 PK	74	-27.74	-57.85	-56.17	4.92	-49
4	14499.02	36.95 AV	54	-17.05	-65.1	-67.79	4.92	-58.31
5	19157.1	49.85 PK	74	-24.15	-52.45	-54.44	4.92	-45.41
6	19157.1	38.15 AV	54	-15.85	-63.57	-67.29	4.92	-57.11
7	23748.2	50.67 PK	74	-23.33	-52.65	-52.38	4.92	-44.59
8	23748.2	39.41 AV	54	-14.59	-62.19	-66.3	4.92	-55.85
9	38608.8	47.59 PK	74	-26.41	-55.09	-56.17	4.92	-47.67
10	38608.8	34.97 AV	54	-19.03	-66.76	-70.45	4.92	-60.29

Note: Margin value = Emission Level - Limit value

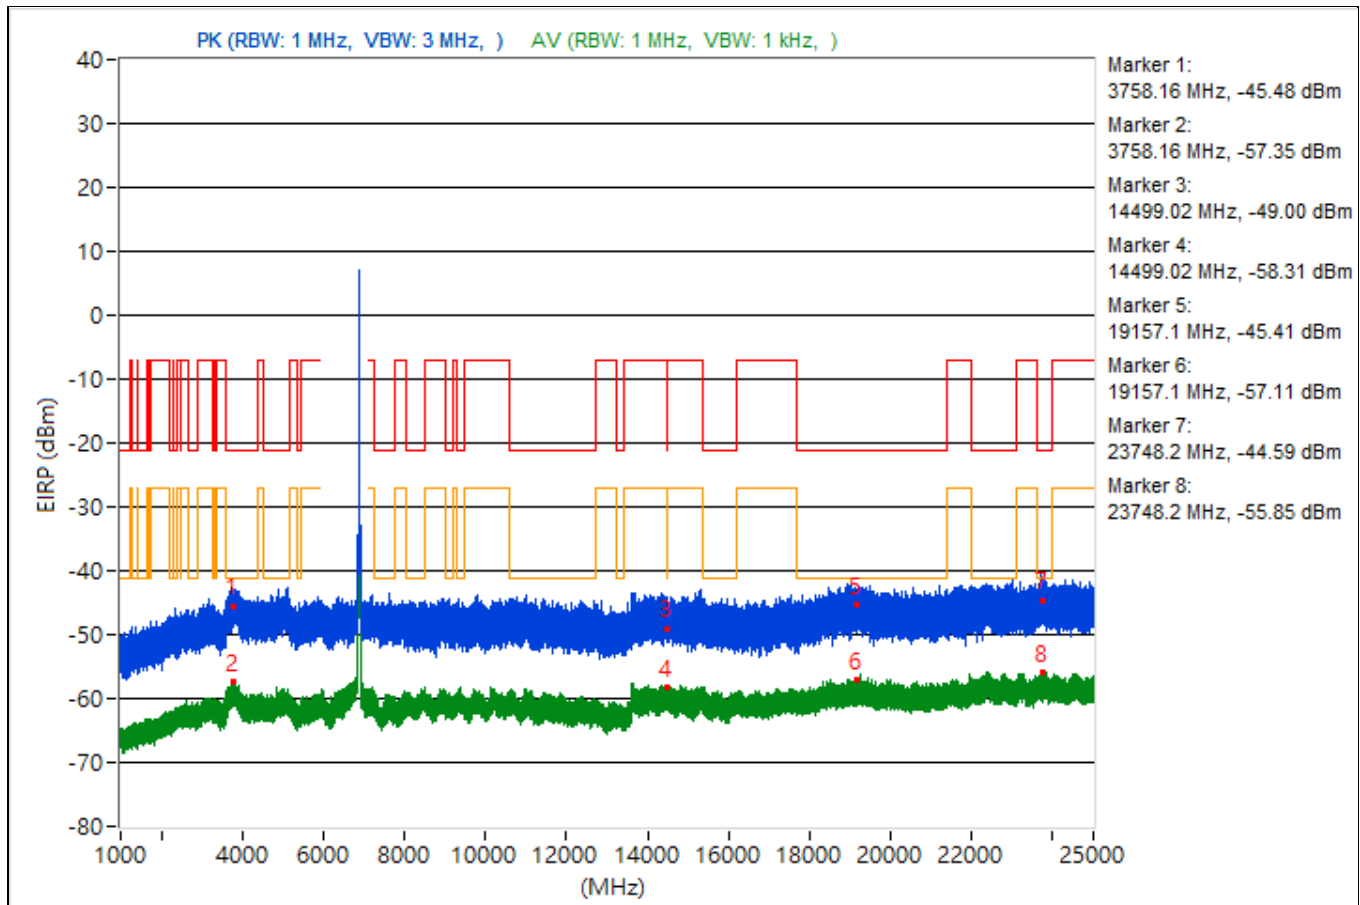


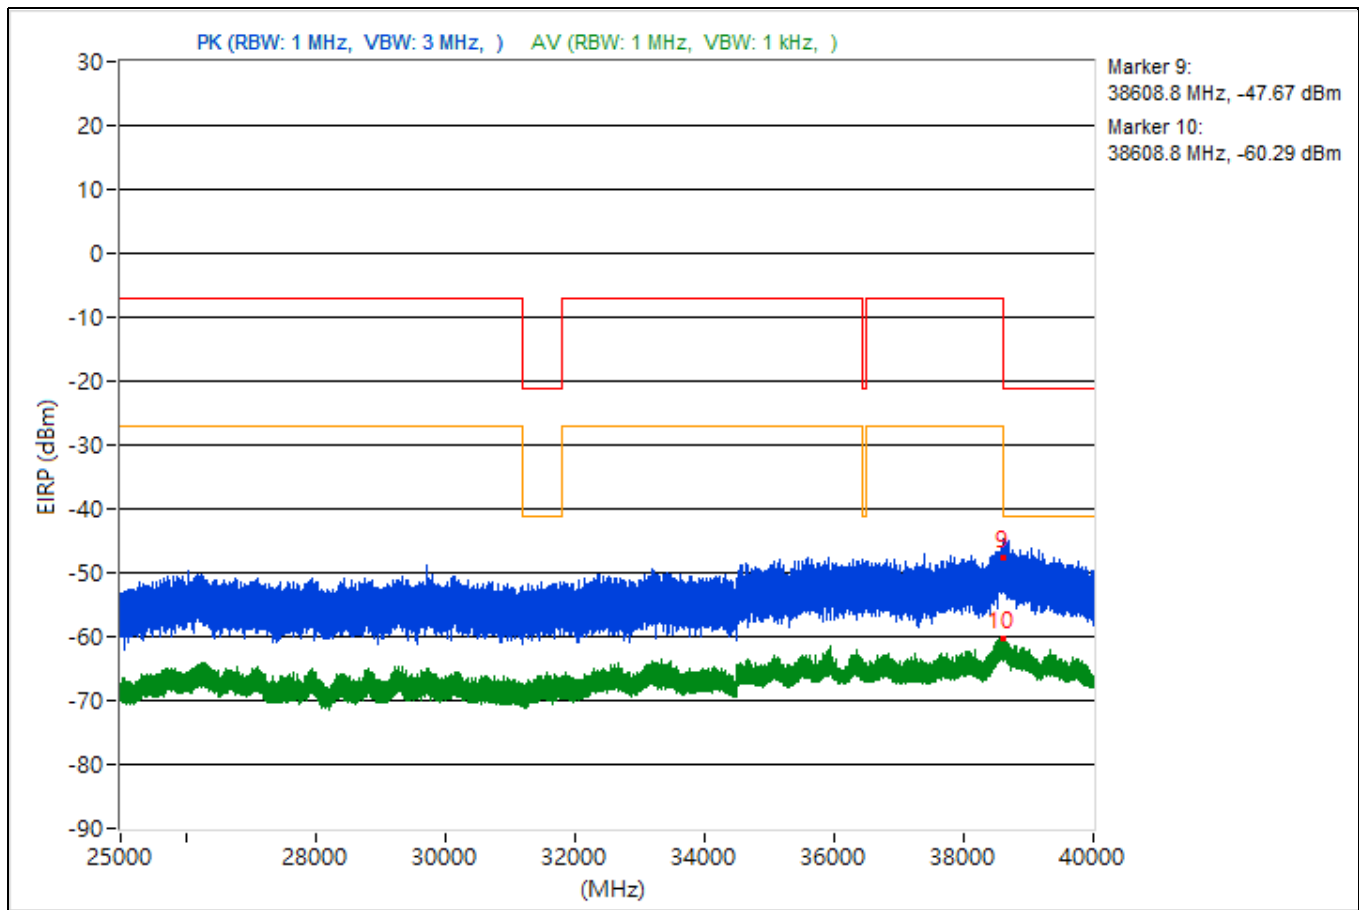


RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3700.91	51.12 PK	74	-22.88	-54.32	-50.59	4.92	-44.14
2	3700.91	37.47 AV	54	-16.53	-64.06	-68.42	4.92	-57.79
3	8434.58	47.3 PK	74	-26.7	-54.05	-59.15	4.92	-47.96
4	8434.58	36.99 AV	54	-17.01	-64.91	-68.07	4.92	-58.27
5	19039.3	48.43 PK	74	-25.57	-55.01	-54.52	4.92	-46.83
6	19039.3	38.95 AV	54	-15.05	-64.89	-63.67	4.92	-56.31
7	22826.8	48.75 PK	74	-25.25	-55.9	-53.35	4.92	-46.51
8	22826.8	39.47 AV	54	-14.53	-62.88	-64.75	4.92	-55.79
9	38642.67	46.96 PK	74	-27.04	-56.12	-56.34	4.92	-48.3
10	38642.67	35.04 AV	54	-18.96	-66.44	-70.99	4.92	-60.22

Note: Margin value = Emission Level - Limit value

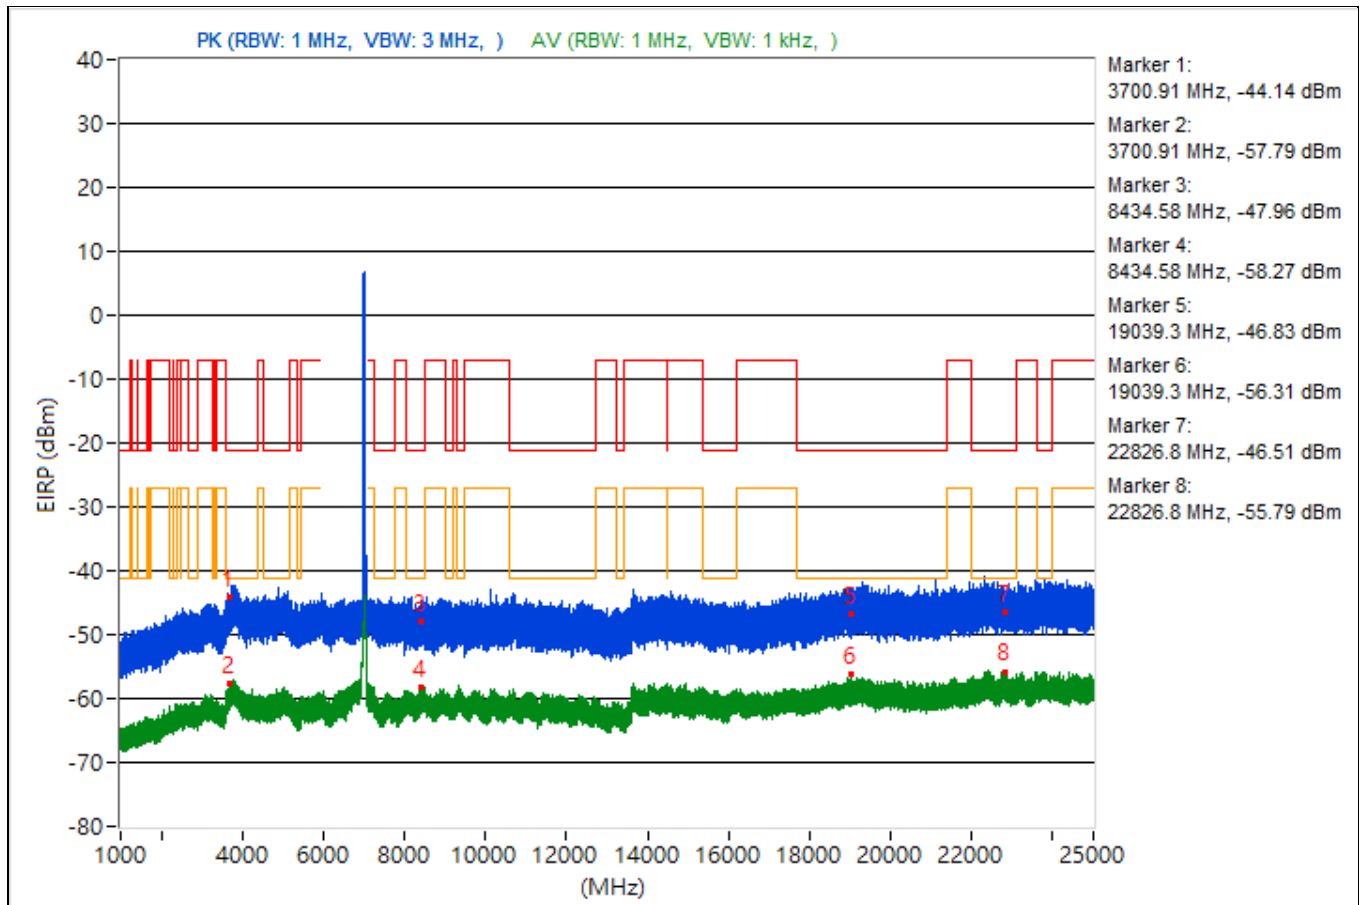


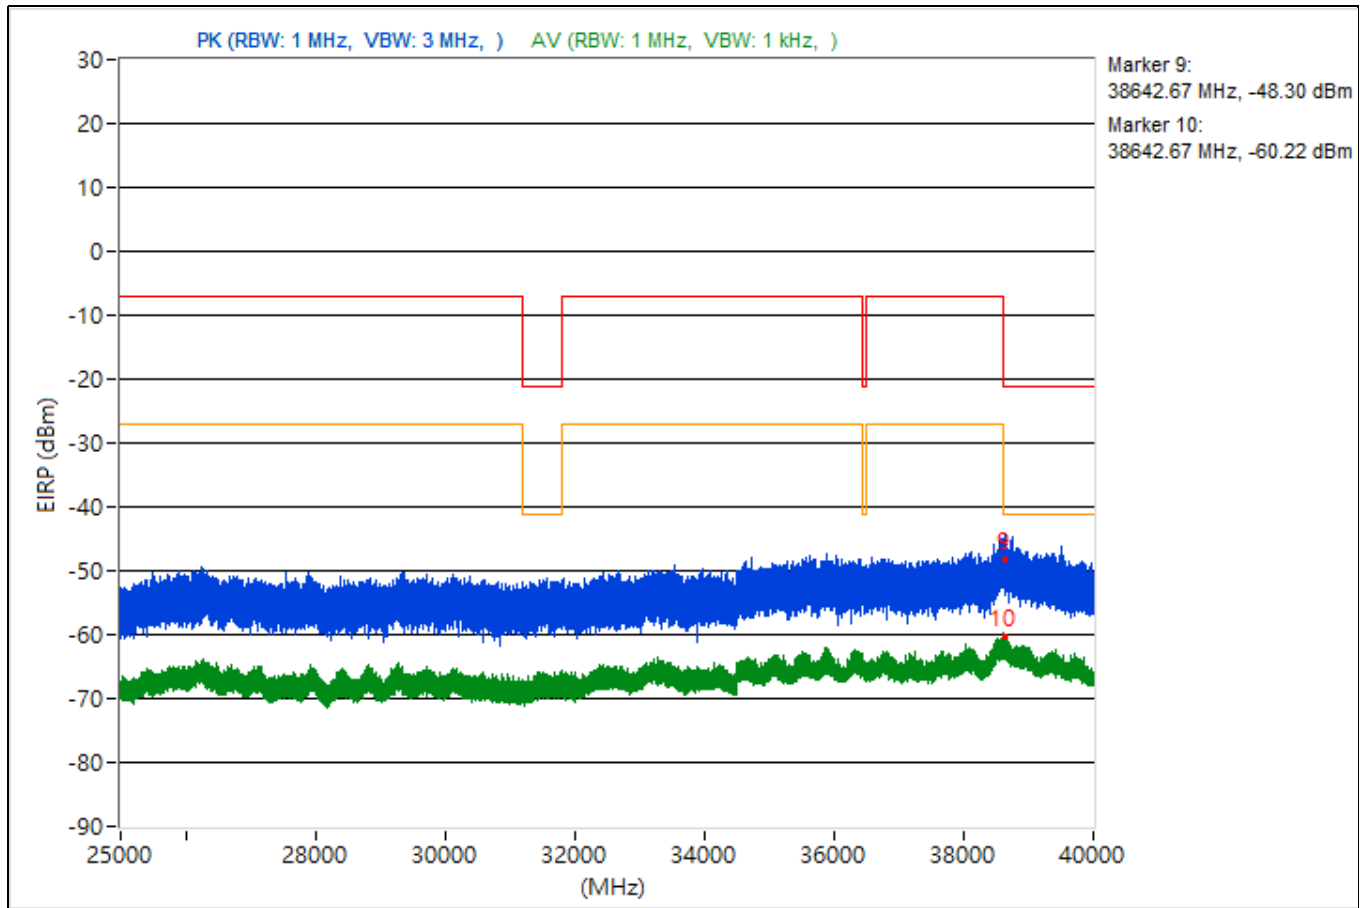


RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3837.33	47.2 PK	74	-26.8	-56.35	-55.65	4.92	-48.06
2	3837.33	37.91 AV	54	-16.09	-64.31	-66.53	4.92	-57.35
3	14490.67	48.27 PK	74	-25.73	-53.88	-56.28	4.92	-46.99
4	14490.67	37.83 AV	54	-16.17	-66	-64.81	4.92	-57.43
5	19405	47.07 PK	74	-26.93	-56.58	-55.69	4.92	-48.19
6	19405	38.28 AV	54	-15.72	-66.63	-63.69	4.92	-56.98
7	23802	50.81 PK	74	-23.19	-53.67	-51.39	4.92	-44.45
8	23802	39.04 AV	54	-14.96	-65.79	-62.96	4.92	-56.22
9	38621.42	46.64 PK	74	-27.36	-57.33	-55.88	4.92	-48.62
10	38621.42	34.32 AV	54	-19.68	-71.64	-67.19	4.92	-60.94

Note: Margin value = Emission Level - Limit value

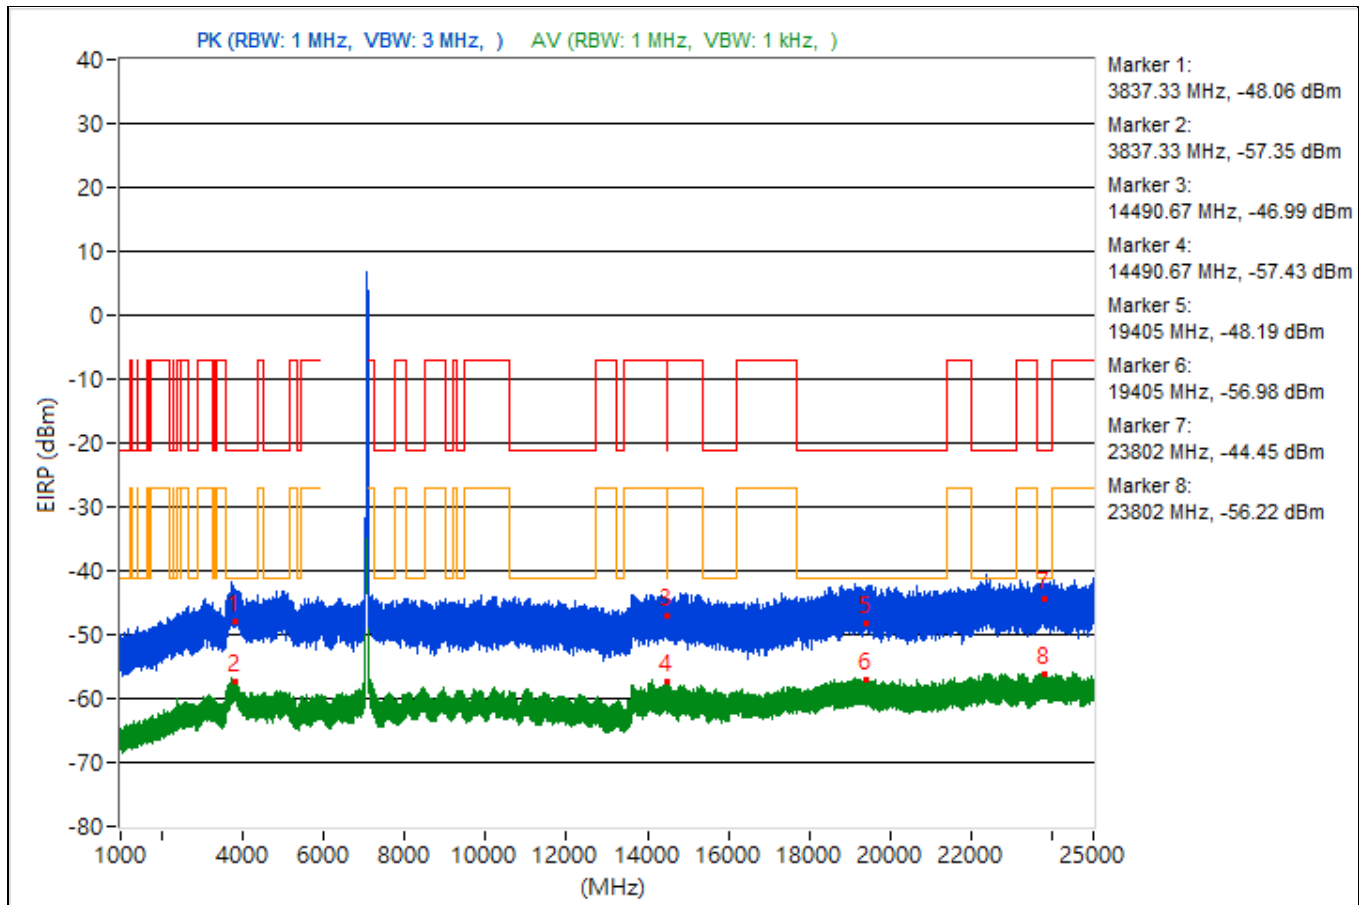


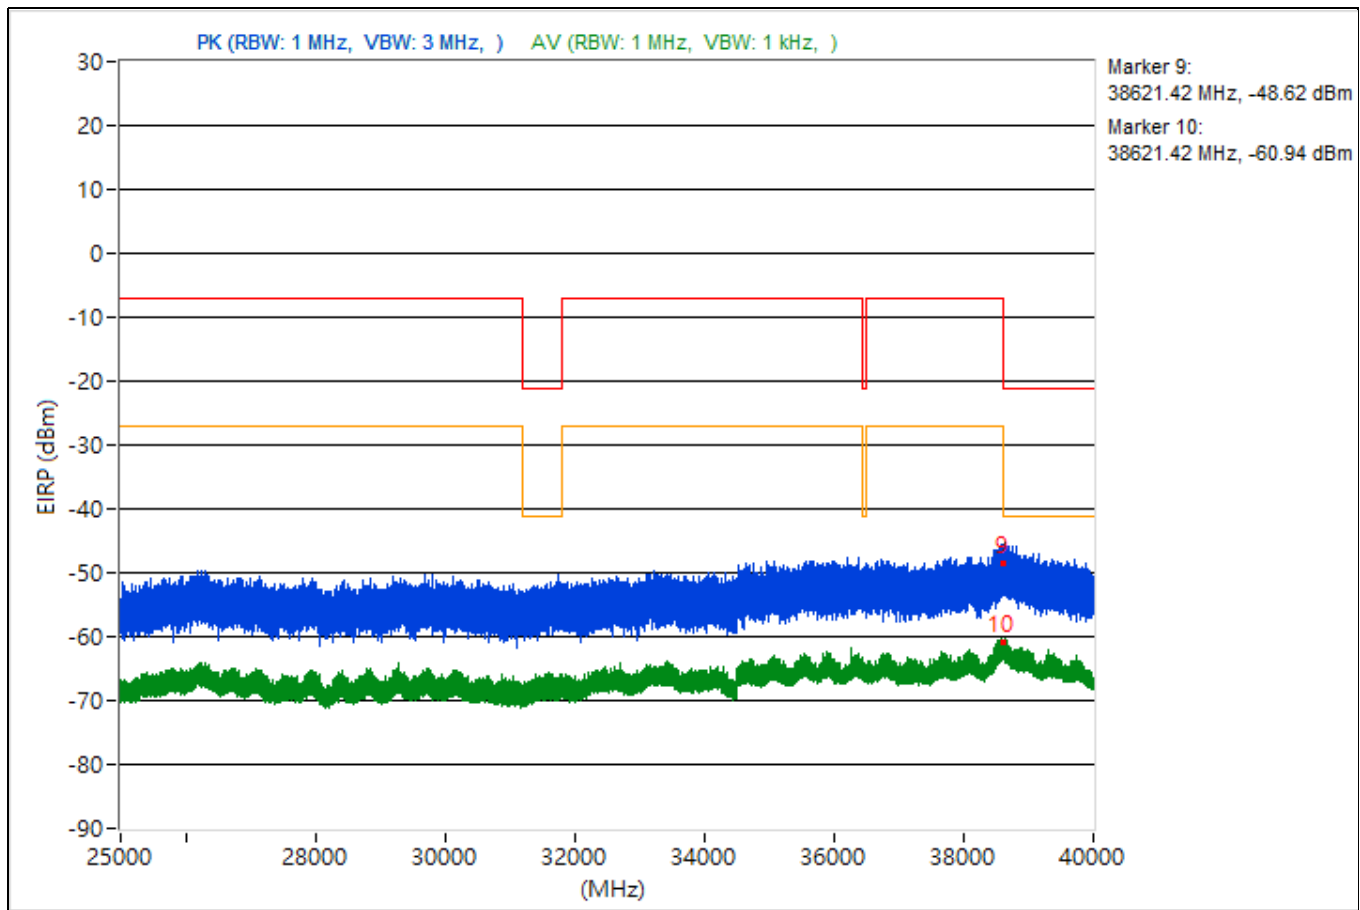


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3774.1	49.38 PK	74	-24.62	-54.06	-53.56	4.92	-45.88
2	3774.1	36.51 AV	54	-17.49	-68.35	-65.48	4.92	-58.75
3	14480.53	47.32 PK	74	-26.68	-55.1	-56.8	4.92	-47.94
4	14480.53	35.98 AV	54	-18.02	-69.53	-65.7	4.92	-59.28
5	19164.3	49.74 PK	74	-24.26	-55.68	-51.99	4.92	-45.52
6	19164.3	37.18 AV	54	-16.82	-65.52	-66.57	4.92	-58.08
7	23835.6	50.67 PK	74	-23.33	-52.15	-52.91	4.92	-44.59
8	23835.6	37.58 AV	54	-16.42	-68.41	-63.92	4.92	-57.68
9	38630.84	46.44 PK	74	-27.56	-60.42	-54.79	4.92	-48.82
10	38630.84	33.89 AV	54	-20.11	-72.31	-67.53	4.92	-61.37

Note: Margin value = Emission Level - Limit value

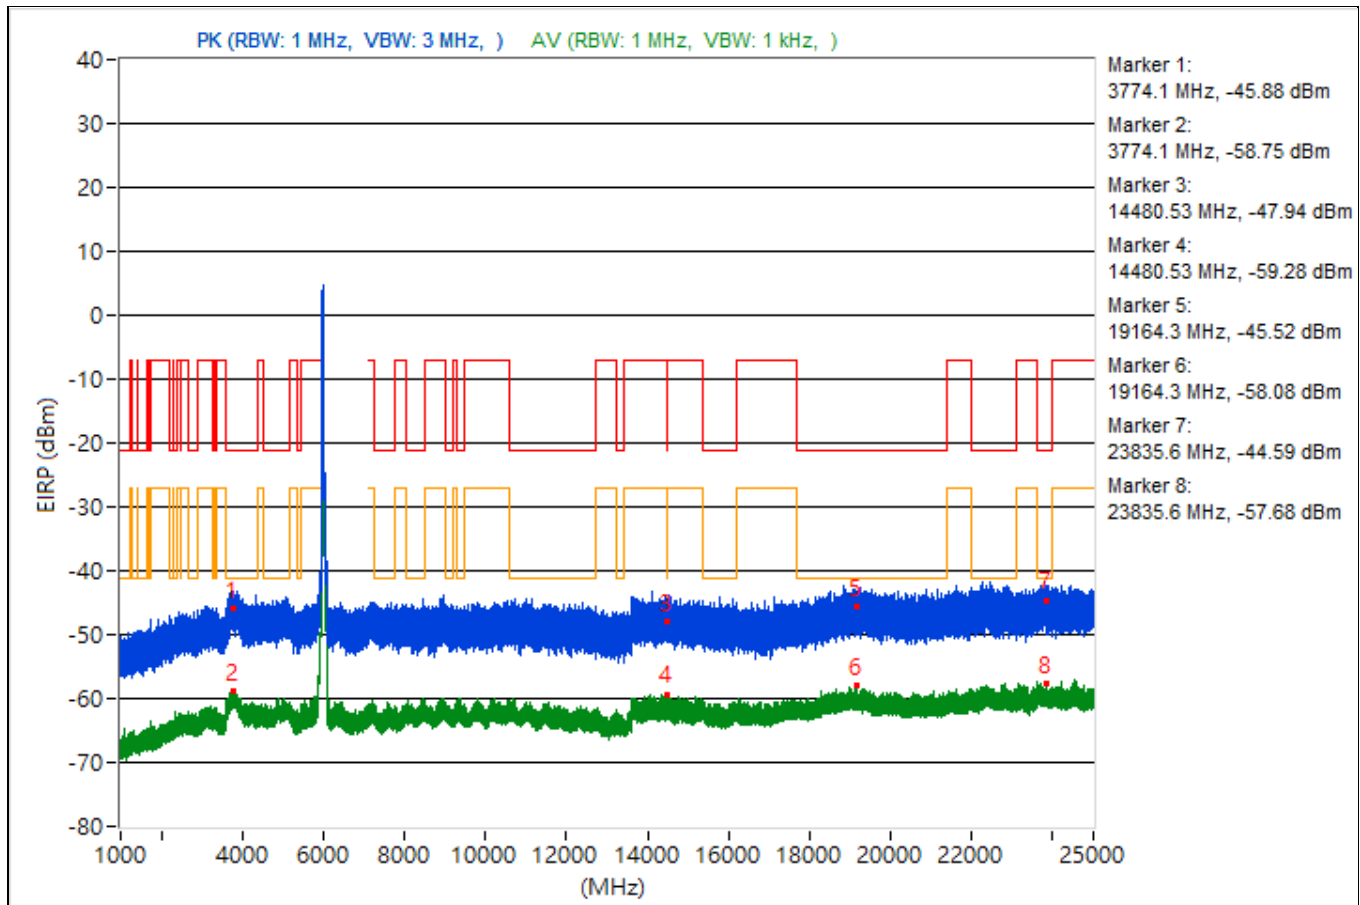


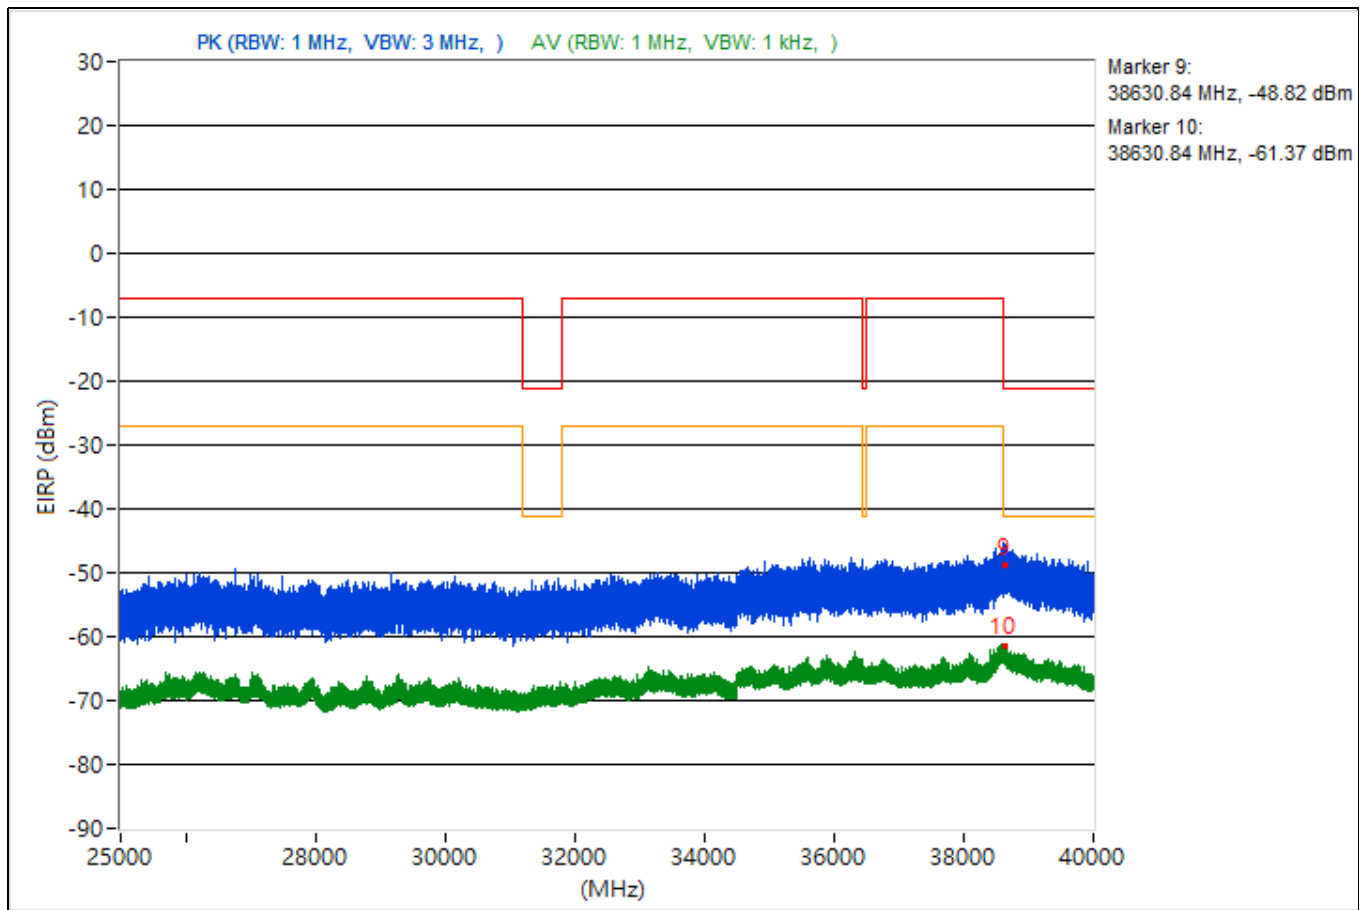


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3750.53	49.21 PK	74	-24.79	-53.23	-54.89	4.92	-46.05
2	3750.53	37.24 AV	54	-16.76	-65.79	-66.12	4.92	-58.02
3	14474.76	46.43 PK	74	-27.57	-57.98	-55.8	4.92	-48.83
4	14474.76	36.03 AV	54	-17.97	-65.85	-69.04	4.92	-59.23
5	19176.3	48.38 PK	74	-25.62	-56.9	-53.4	4.92	-46.88
6	19176.3	37.17 AV	54	-16.83	-68.9	-64.31	4.92	-58.09
7	22410.7	51.25 PK	74	-22.75	-52.45	-51.48	4.92	-44.01
8	22410.7	37.19 AV	54	-16.81	-67.76	-64.75	4.92	-58.07
9	38609.16	45.61 PK	74	-28.39	-57.47	-57.69	4.92	-49.65
10	38609.16	34.99 AV	54	-19.01	-68.07	-68.33	4.92	-60.27

Note: Margin value = Emission Level - Limit value

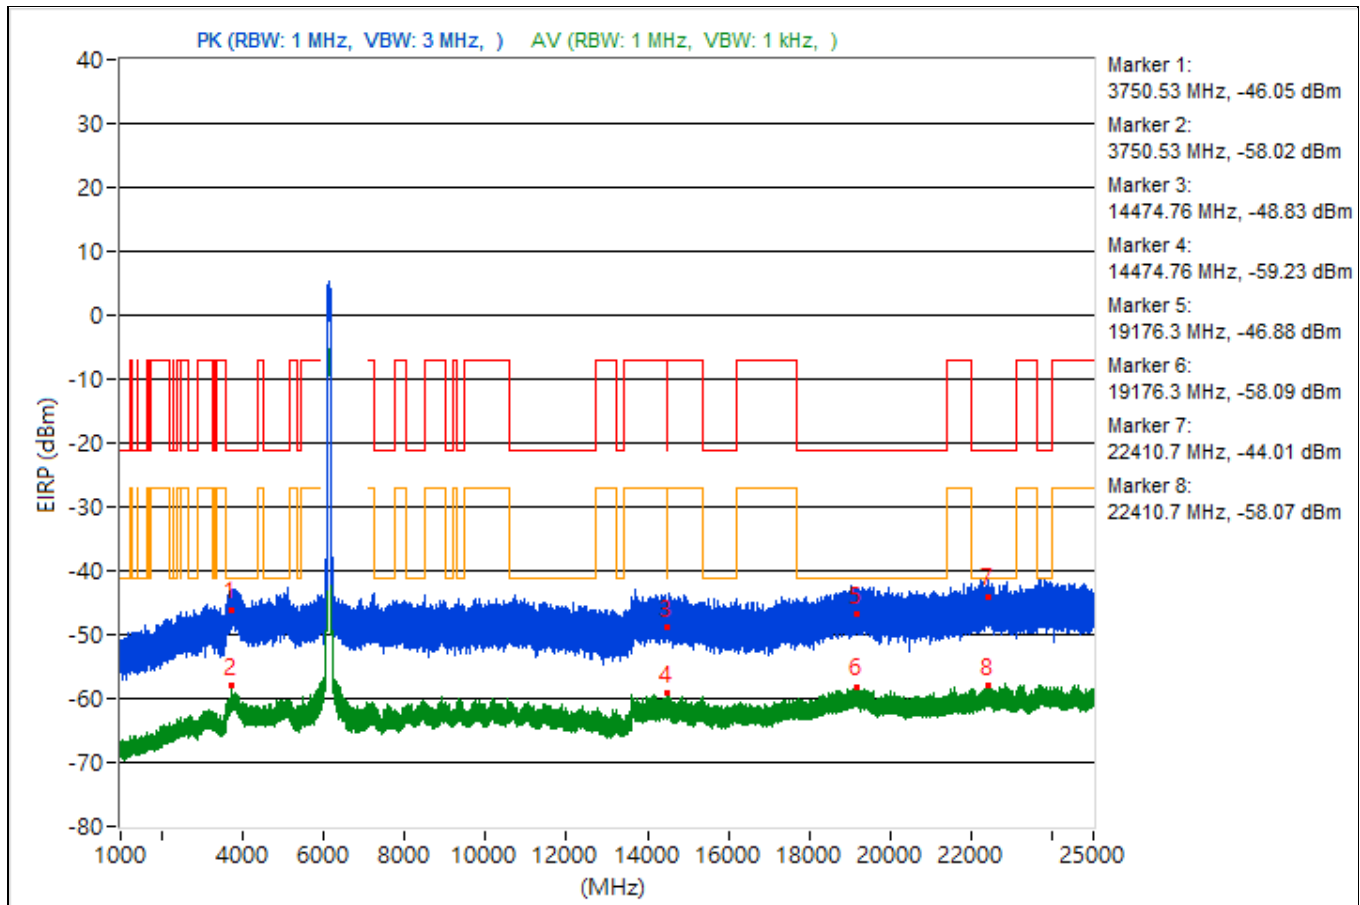


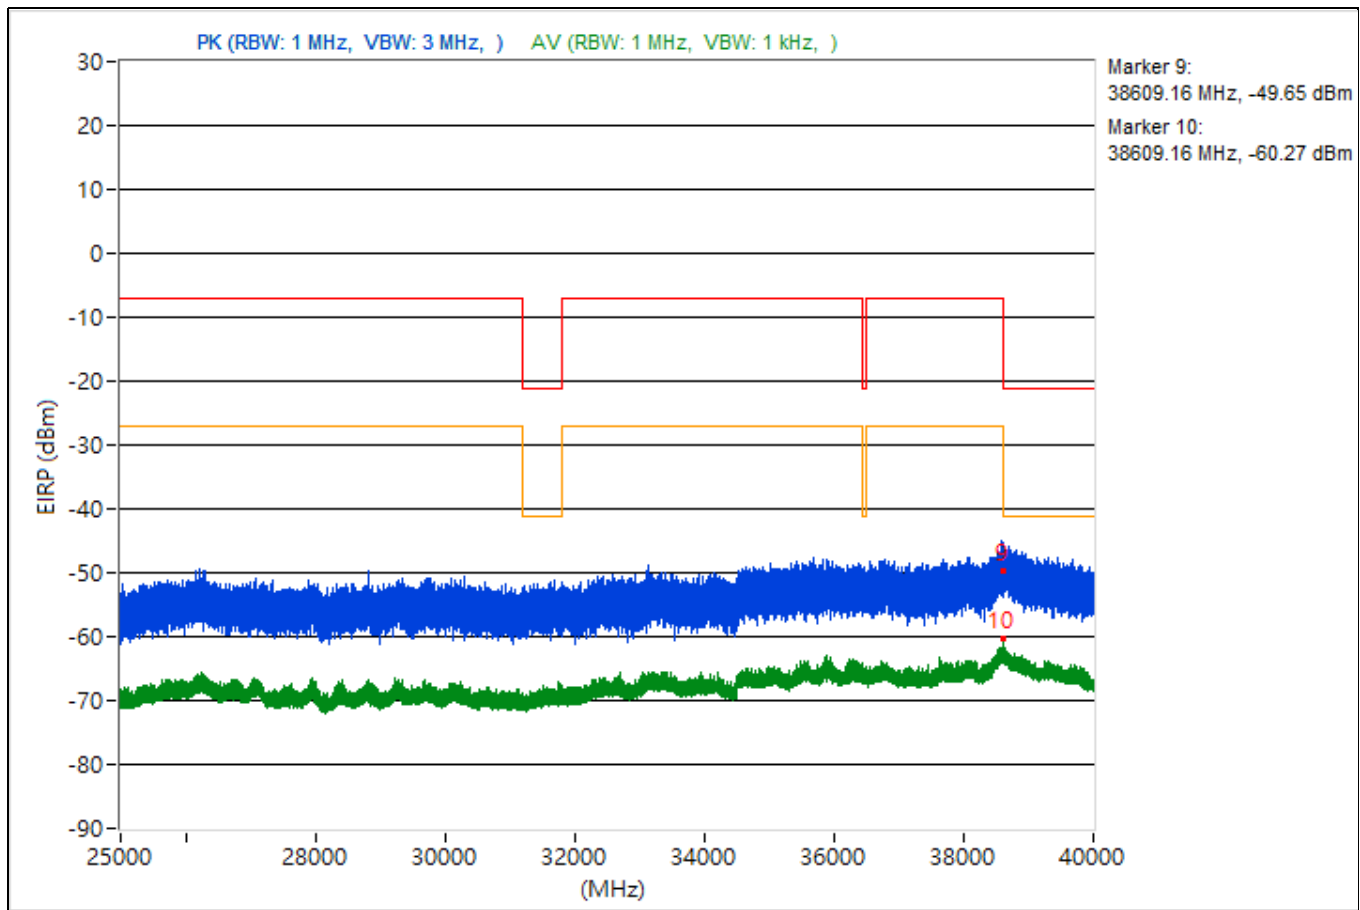


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3814.62	48.61 PK	74	-25.39	-57.92	-52.71	4.92	-46.65
2	3814.62	36.61 AV	54	-17.39	-68.49	-65.26	4.92	-58.65
3	14480.62	44.32 PK	74	-29.68	-59.15	-58.6	4.92	-50.94
4	14480.62	35.86 AV	54	-18.14	-66.58	-68.24	4.92	-59.4
5	19111.4	50.73 PK	74	-23.27	-50.5	-56.15	4.92	-44.53
6	19111.4	37.61 AV	54	-16.39	-63.84	-68.52	4.92	-57.65
7	22384.2	47.72 PK	74	-26.28	-55.18	-55.78	4.92	-47.54
8	22384.2	37.93 AV	54	-16.07	-68.3	-63.49	4.92	-57.33
9	38662.76	46.8 PK	74	-27.2	-56.89	-55.94	4.92	-48.46
10	38662.76	33.59 AV	54	-20.41	-68.18	-71.73	4.92	-61.67

Note: Margin value = Emission Level - Limit value

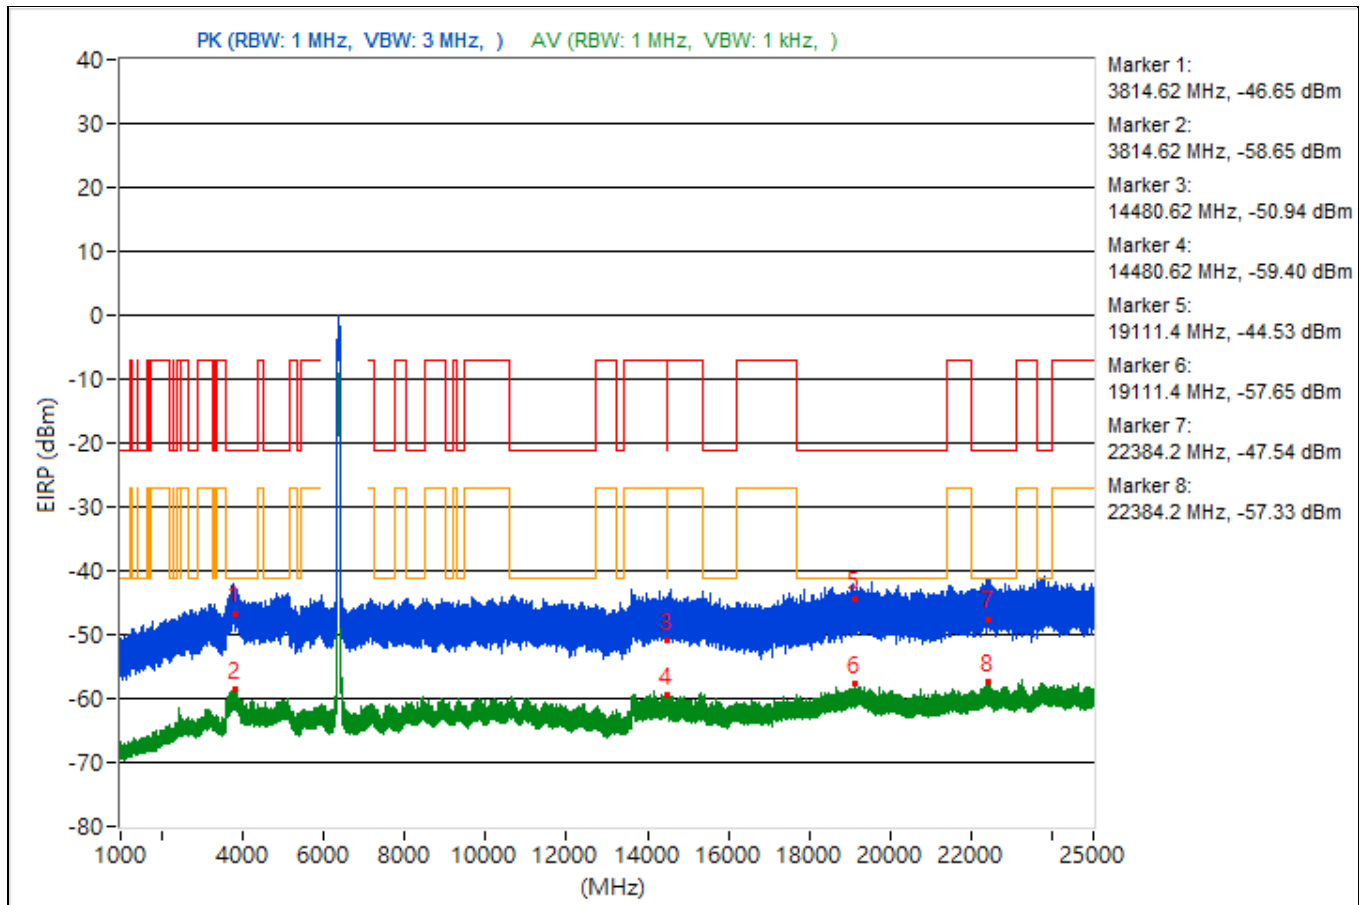


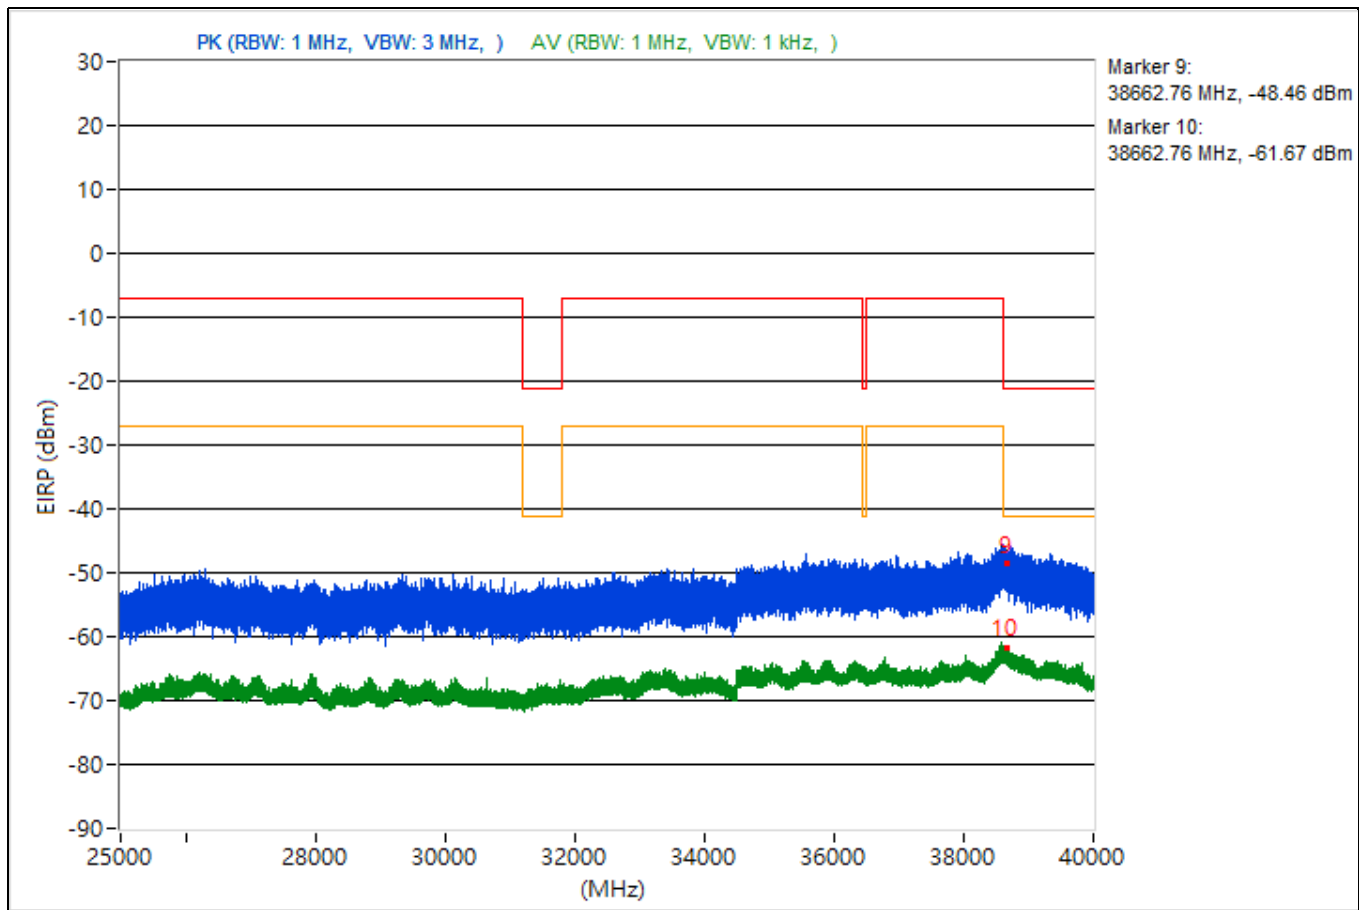


RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3744.47	50.62 PK	74	-23.38	-52.08	-53.14	4.92	-44.64
2	3744.47	36.24 AV	54	-17.76	-65.83	-68.45	4.92	-59.02
3	15366.76	46.34 PK	74	-27.66	-57.39	-56.37	4.92	-48.92
4	15366.76	36.02 AV	54	-17.98	-66.6	-67.83	4.92	-59.24
5	19084.3	50.02 PK	74	-23.98	-56.19	-51.41	4.92	-45.24
6	19084.3	37.22 AV	54	-16.78	-64.81	-67.57	4.92	-58.04
7	22423.3	47.04 PK	74	-26.96	-56.06	-56.25	4.92	-48.22
8	22423.3	38.27 AV	54	-15.73	-63.36	-67.4	4.92	-56.99
9	38601.33	46.57 PK	74	-27.43	-55.58	-57.99	4.92	-48.69
10	38601.33	33.46 AV	54	-20.54	-71.34	-68.57	4.92	-61.8

Note: Margin value = Emission Level - Limit value

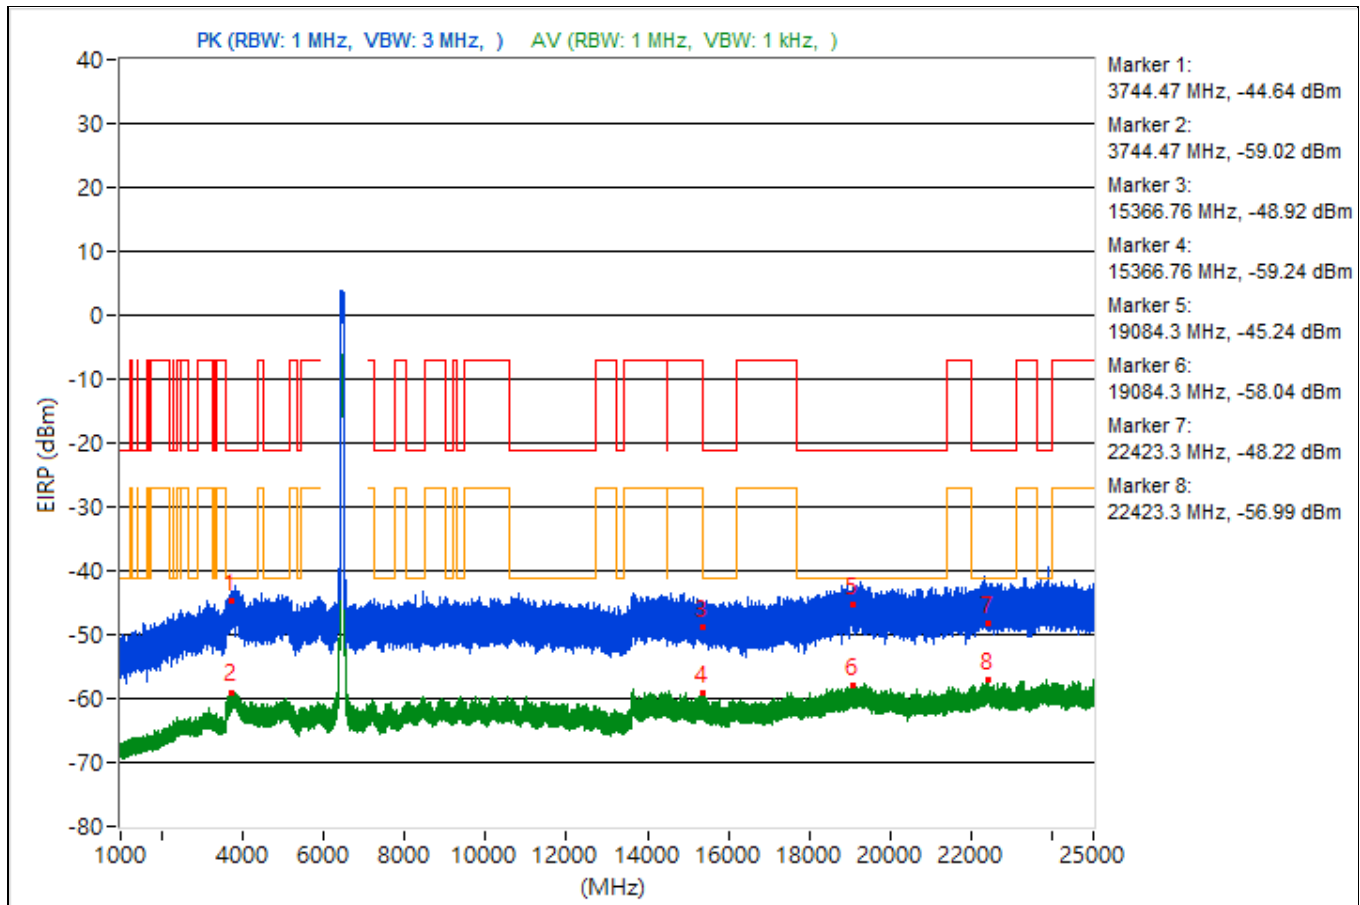


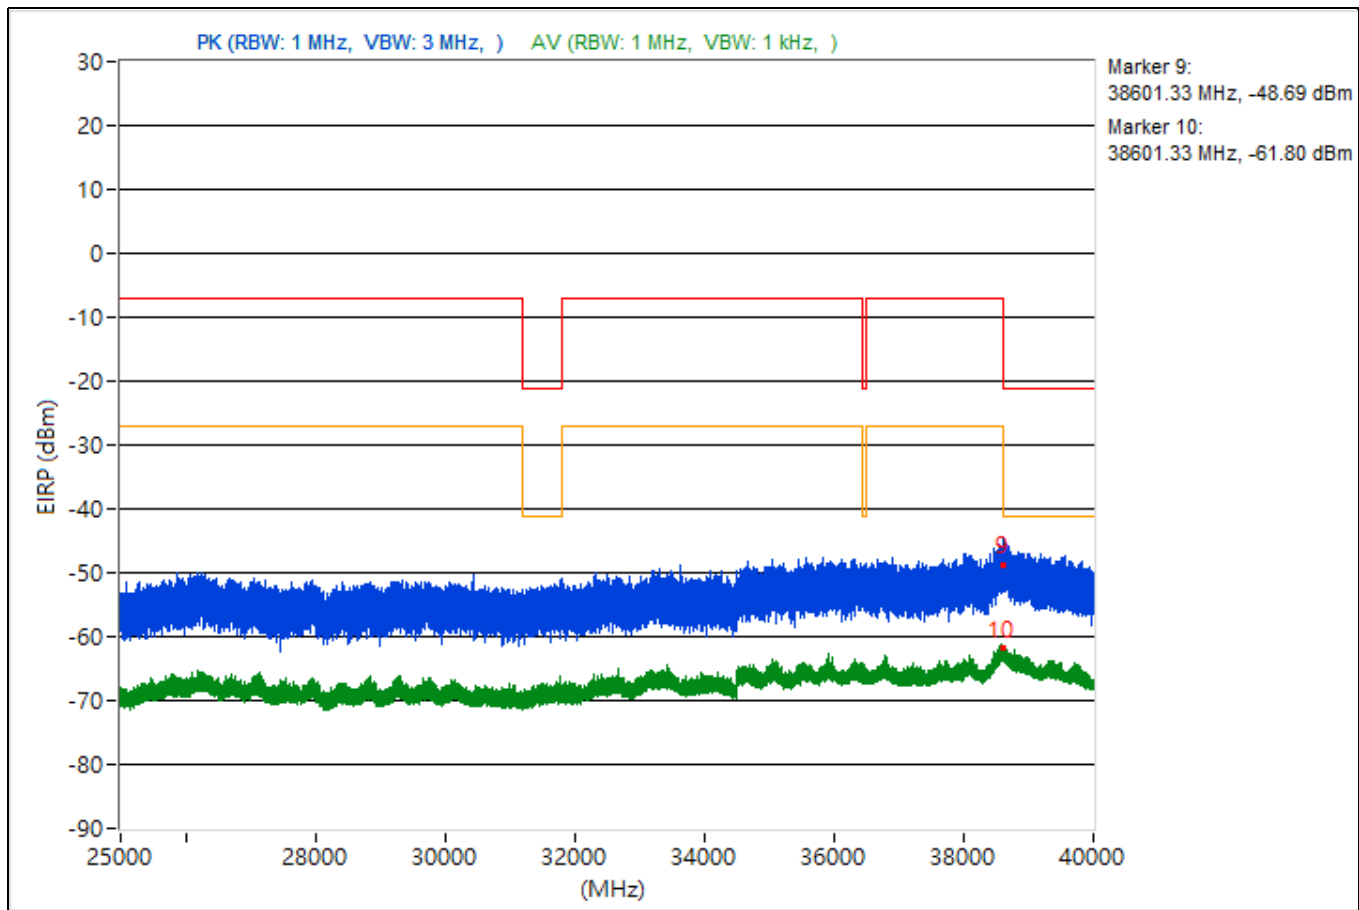


RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3836.24	48.9 PK	74	-25.1	-53.94	-54.67	4.92	-46.36
2	3836.24	37.23 AV	54	-16.77	-65.19	-66.9	4.92	-58.03
3	8453.33	50.1 PK	74	-23.9	-54.85	-51.84	4.92	-45.16
4	8453.33	36.68 AV	54	-17.32	-65.48	-67.88	4.92	-58.58
5	19004.2	49.97 PK	74	-24.03	-52.64	-53.9	4.92	-45.29
6	19004.2	37.77 AV	54	-16.23	-67.31	-64.12	4.92	-57.49
7	23700.9	48.85 PK	74	-25.15	-54.02	-54.69	4.92	-46.41
8	23700.9	38.48 AV	54	-15.52	-63.73	-65.97	4.92	-56.78
9	38606.49	46.58 PK	74	-27.42	-60.51	-54.59	4.92	-48.68
10	38606.49	33.9 AV	54	-20.1	-70.92	-68.11	4.92	-61.36

Note: Margin value = Emission Level - Limit value

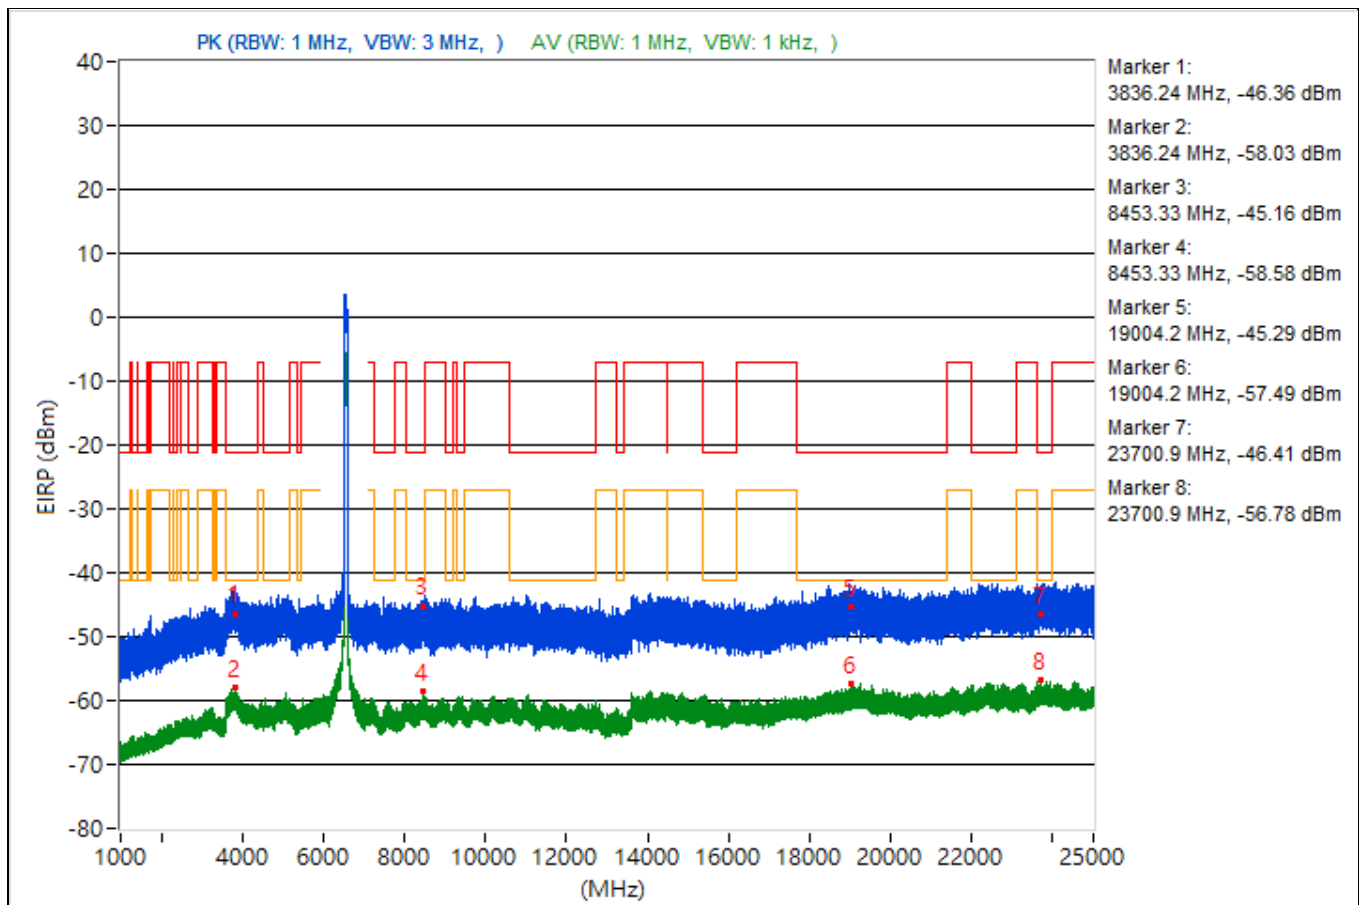


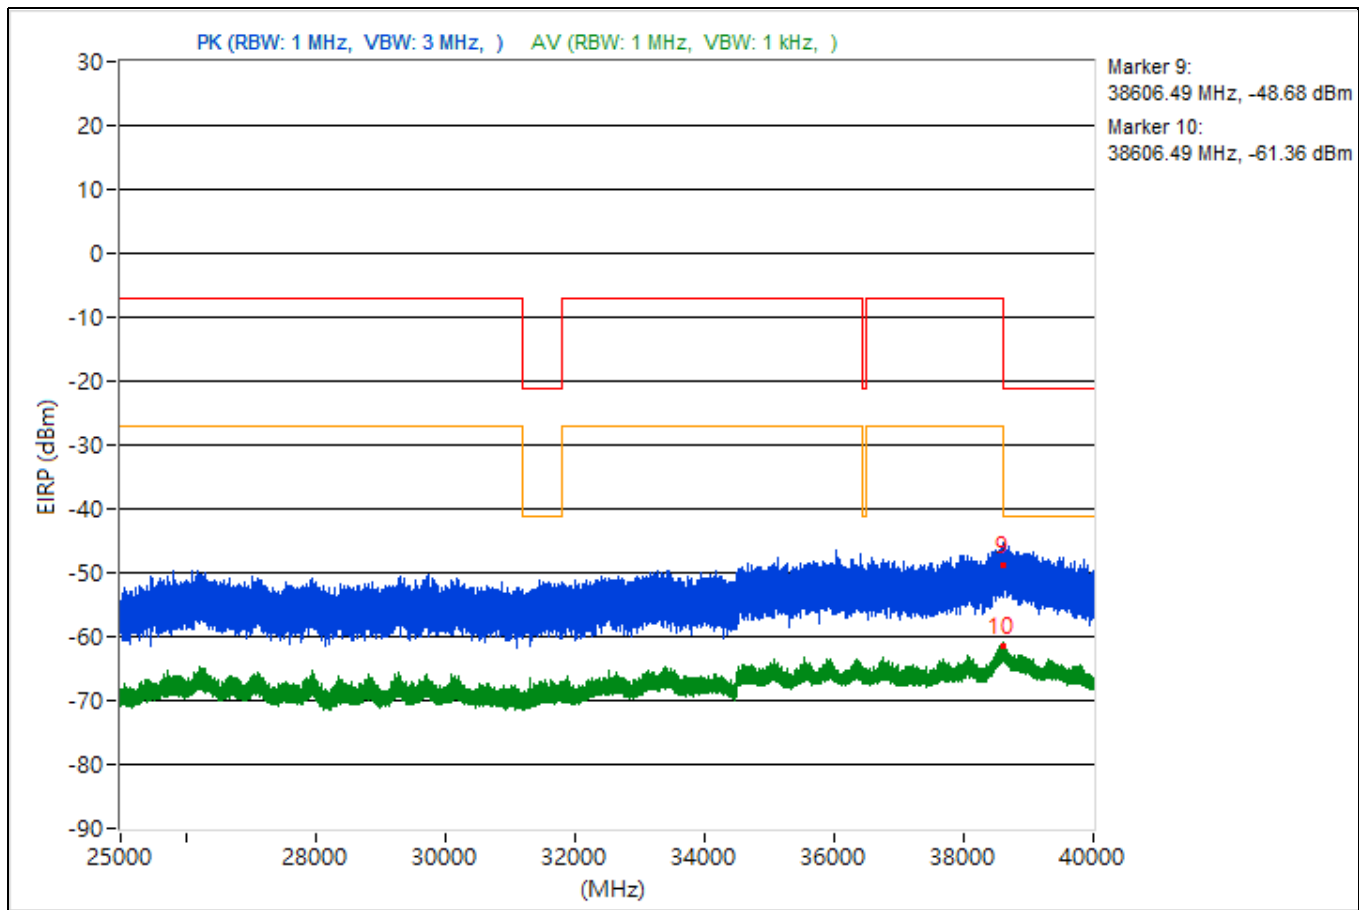


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3787.24	50.51 PK	74	-23.49	-52.83	-52.53	4.92	-44.75
2	3787.24	36.89 AV	54	-17.11	-67.61	-65.3	4.92	-58.37
3	8490.13	47.52 PK	74	-26.48	-55.99	-55.37	4.92	-47.74
4	8490.13	36.02 AV	54	-17.98	-65.83	-69.12	4.92	-59.24
5	19449.1	48.68 PK	74	-25.32	-53.37	-56.04	4.92	-46.58
6	19449.1	38 AV	54	-16	-65.82	-64.64	4.92	-57.26
7	23640.9	49.49 PK	74	-24.51	-51.76	-57.29	4.92	-45.77
8	23640.9	37.94 AV	54	-16.06	-67.57	-63.75	4.92	-57.32
9	38611.47	45.41 PK	74	-28.59	-56.06	-60.67	4.92	-49.85
10	38611.47	33.66 AV	54	-20.34	-68.44	-70.99	4.92	-61.6

Note: Margin value = Emission Level - Limit value

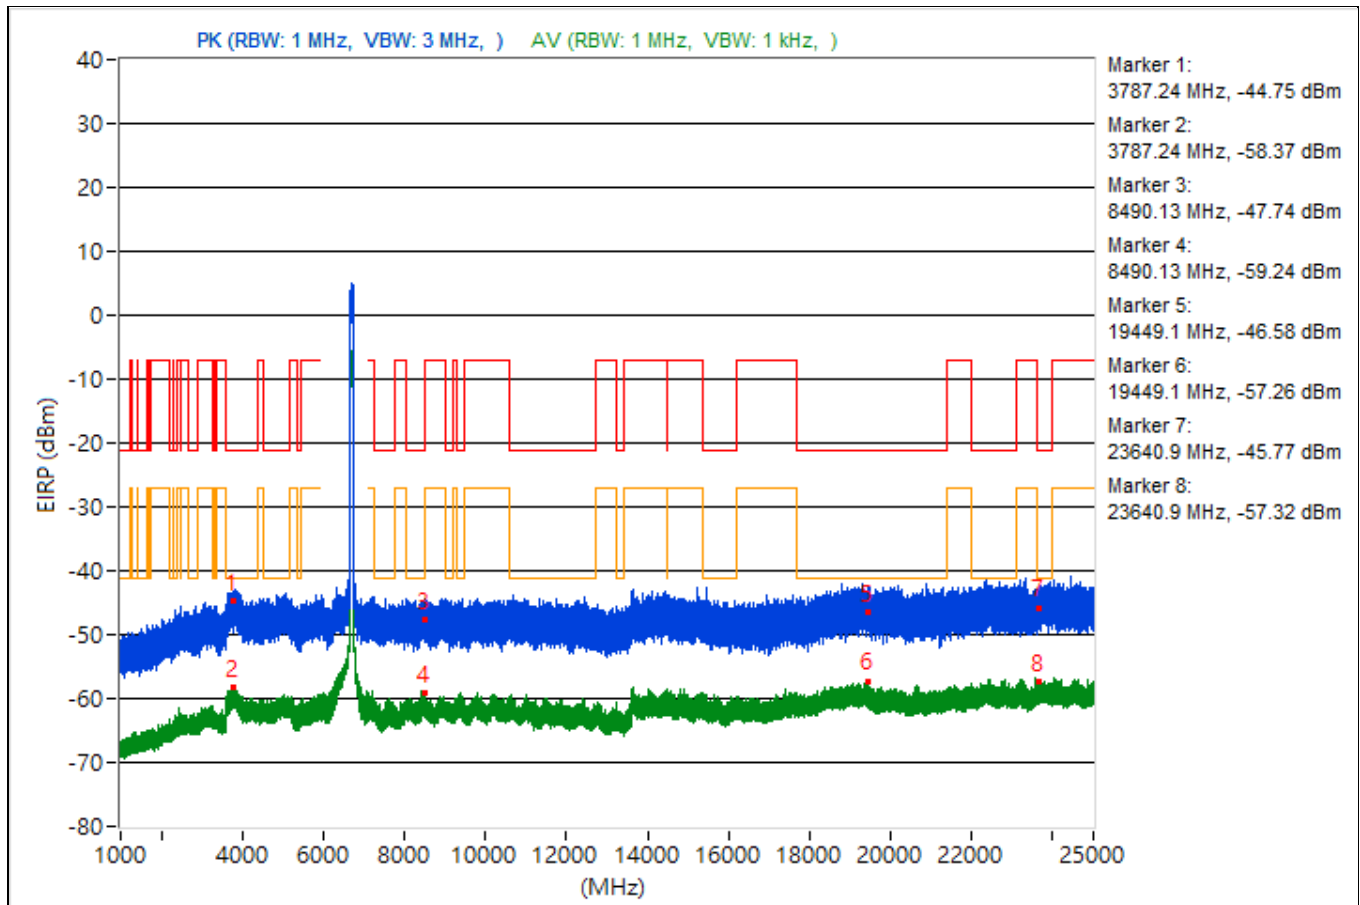


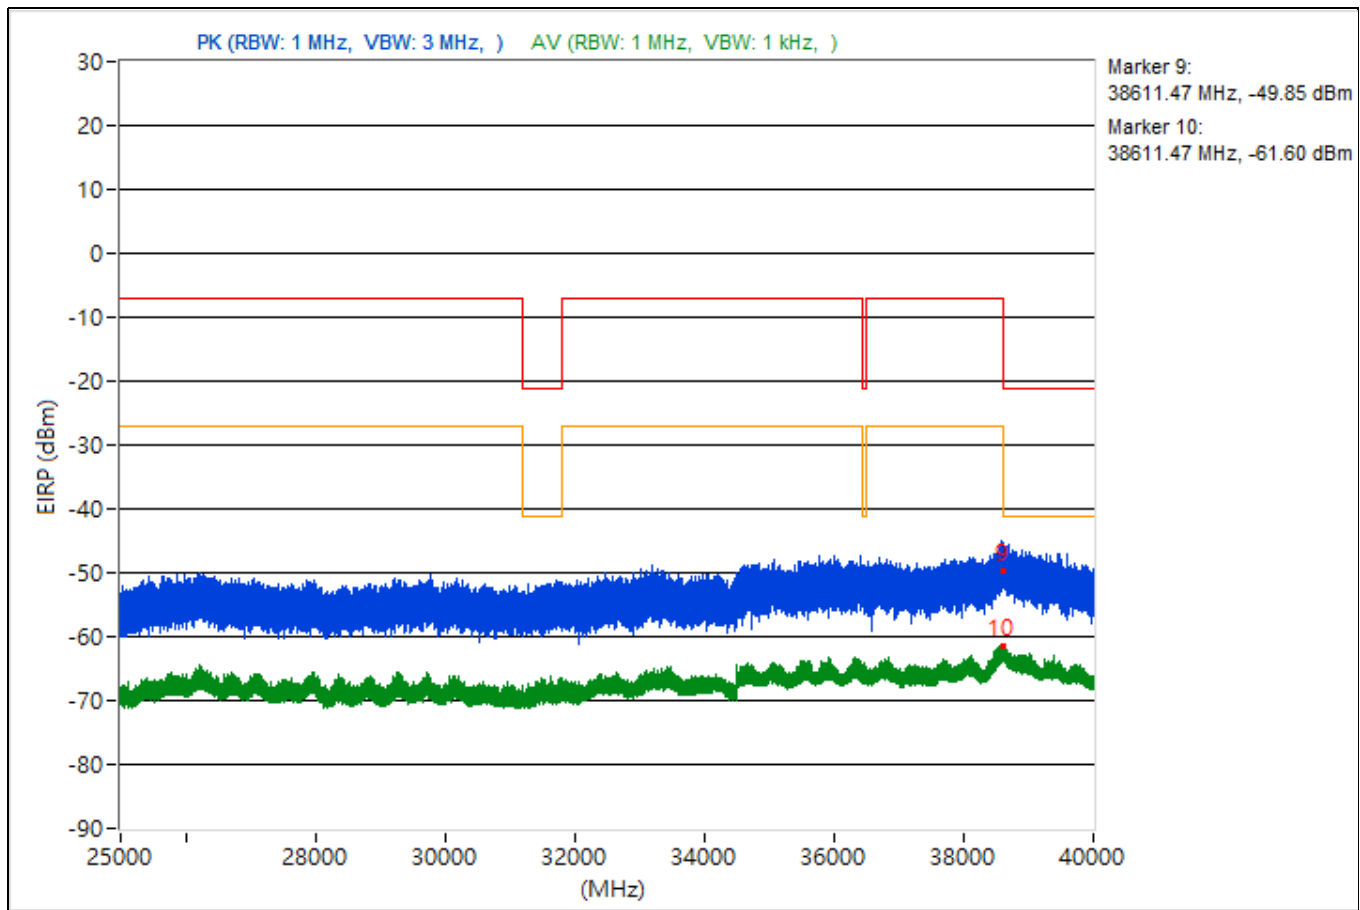


RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3724.48	49.02 PK	74	-24.98	-53.29	-55.29	4.92	-46.24
2	3724.48	36.99 AV	54	-17.01	-67.91	-64.97	4.92	-58.27
3	14485.78	47.55 PK	74	-26.45	-54.65	-56.93	4.92	-47.71
4	14485.78	36.88 AV	54	-17.12	-65.75	-66.95	4.92	-58.38
5	19326.4	50.03 PK	74	-23.97	-51.81	-55.12	4.92	-45.23
6	19326.4	37.92 AV	54	-16.08	-66.21	-64.5	4.92	-57.34
7	22428.4	48.89 PK	74	-25.11	-56.28	-52.95	4.92	-46.37
8	22428.4	38.16 AV	54	-15.84	-63.73	-66.88	4.92	-57.1
9	38614.4	44.68 PK	74	-29.32	-58.31	-58.72	4.92	-50.58
10	38614.4	33.7 AV	54	-20.3	-68.42	-70.91	4.92	-61.56

Note: Margin value = Emission Level - Limit value

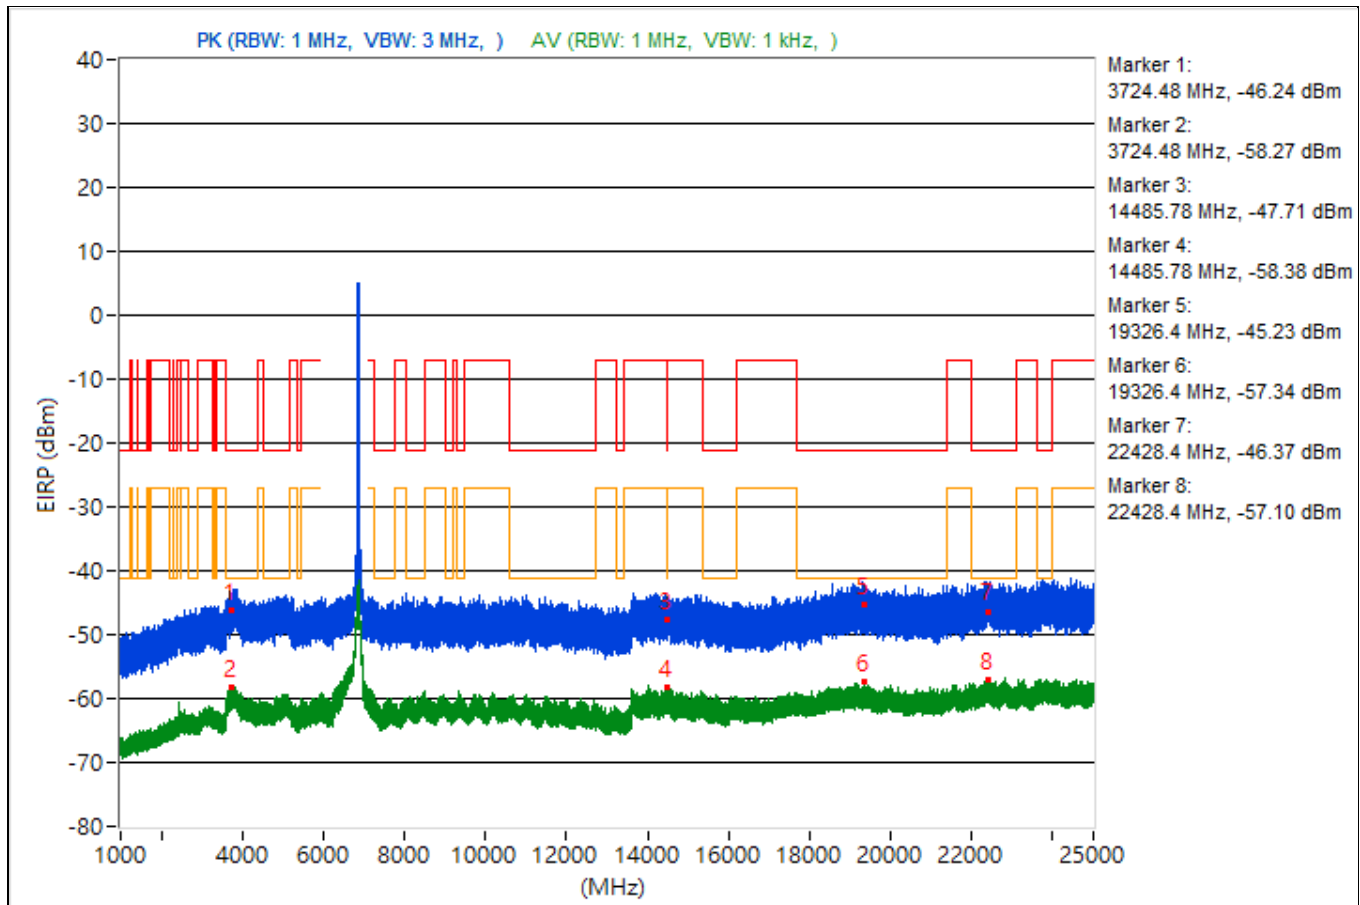


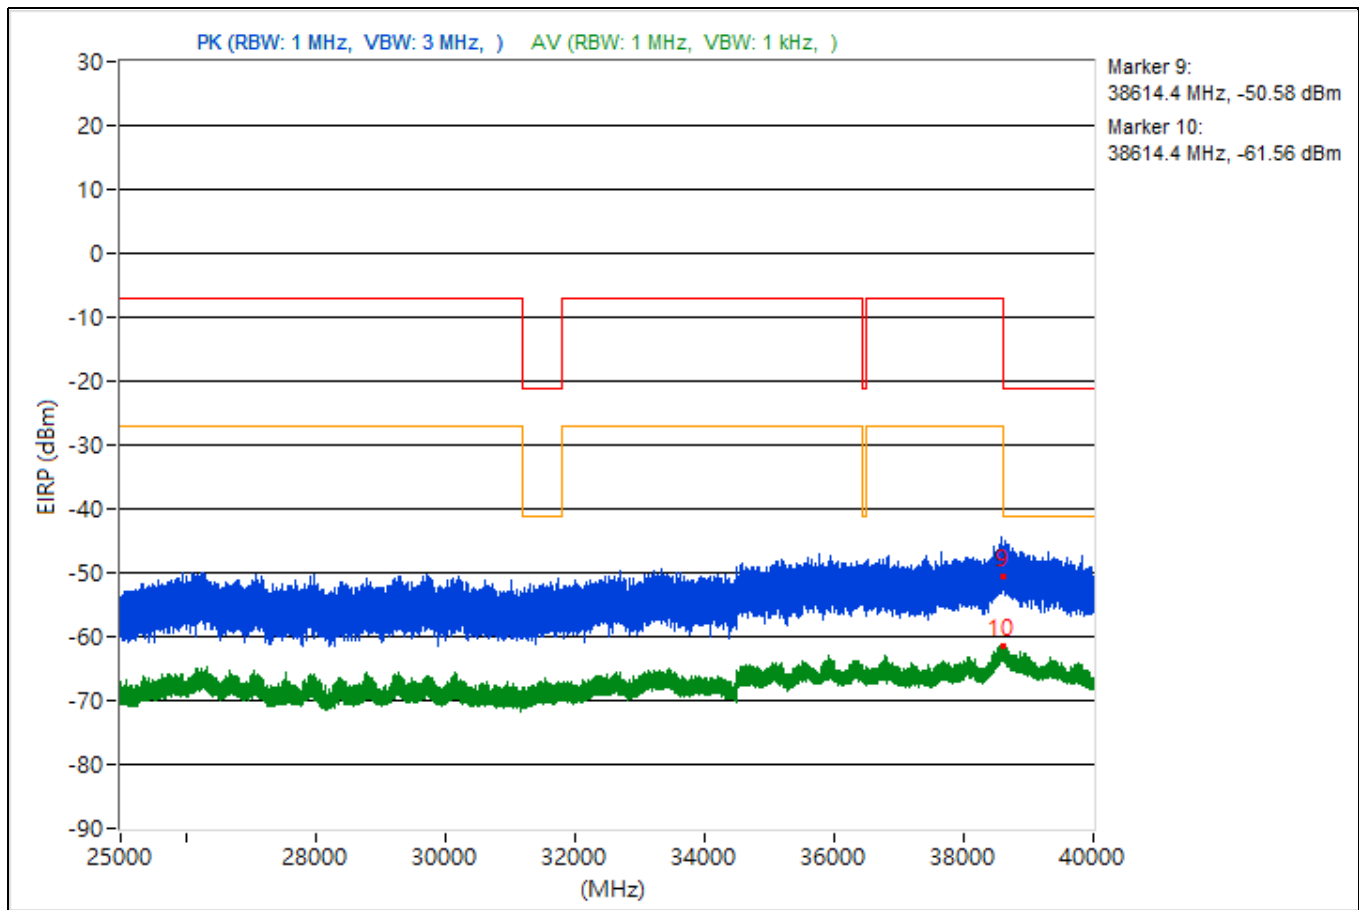


RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3767.64	48.98 PK	74	-25.02	-53.1	-55.69	4.92	-46.28
2	3767.64	37.21 AV	54	-16.79	-67.5	-64.85	4.92	-58.05
3	8192	47.52 PK	74	-26.48	-54.71	-56.91	4.92	-47.74
4	8192	36.25 AV	54	-17.75	-68.69	-65.69	4.92	-59.01
5	19358.3	49.59 PK	74	-24.41	-53.94	-53.28	4.92	-45.67
6	19358.3	38.02 AV	54	-15.98	-67.14	-63.82	4.92	-57.24
7	23705.8	51.75 PK	74	-22.25	-52.75	-50.43	4.92	-43.51
8	23705.8	38.2 AV	54	-15.8	-67.31	-63.48	4.92	-57.06
9	38658.93	47.3 PK	74	-26.7	-54.62	-57.69	4.92	-47.96
10	38658.93	34.79 AV	54	-19.21	-67.47	-69.58	4.92	-60.47

Note: Margin value = Emission Level - Limit value

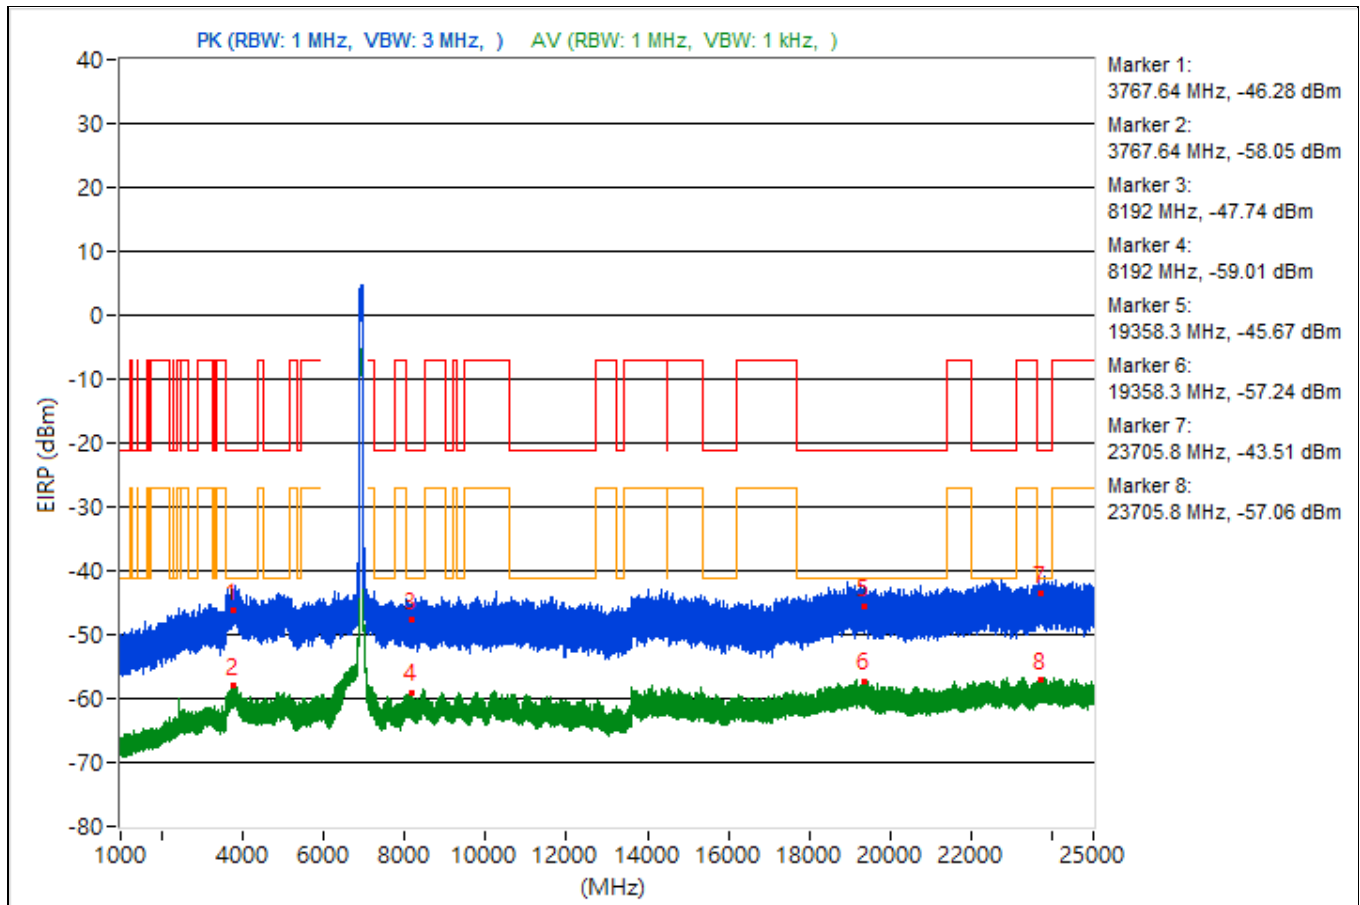


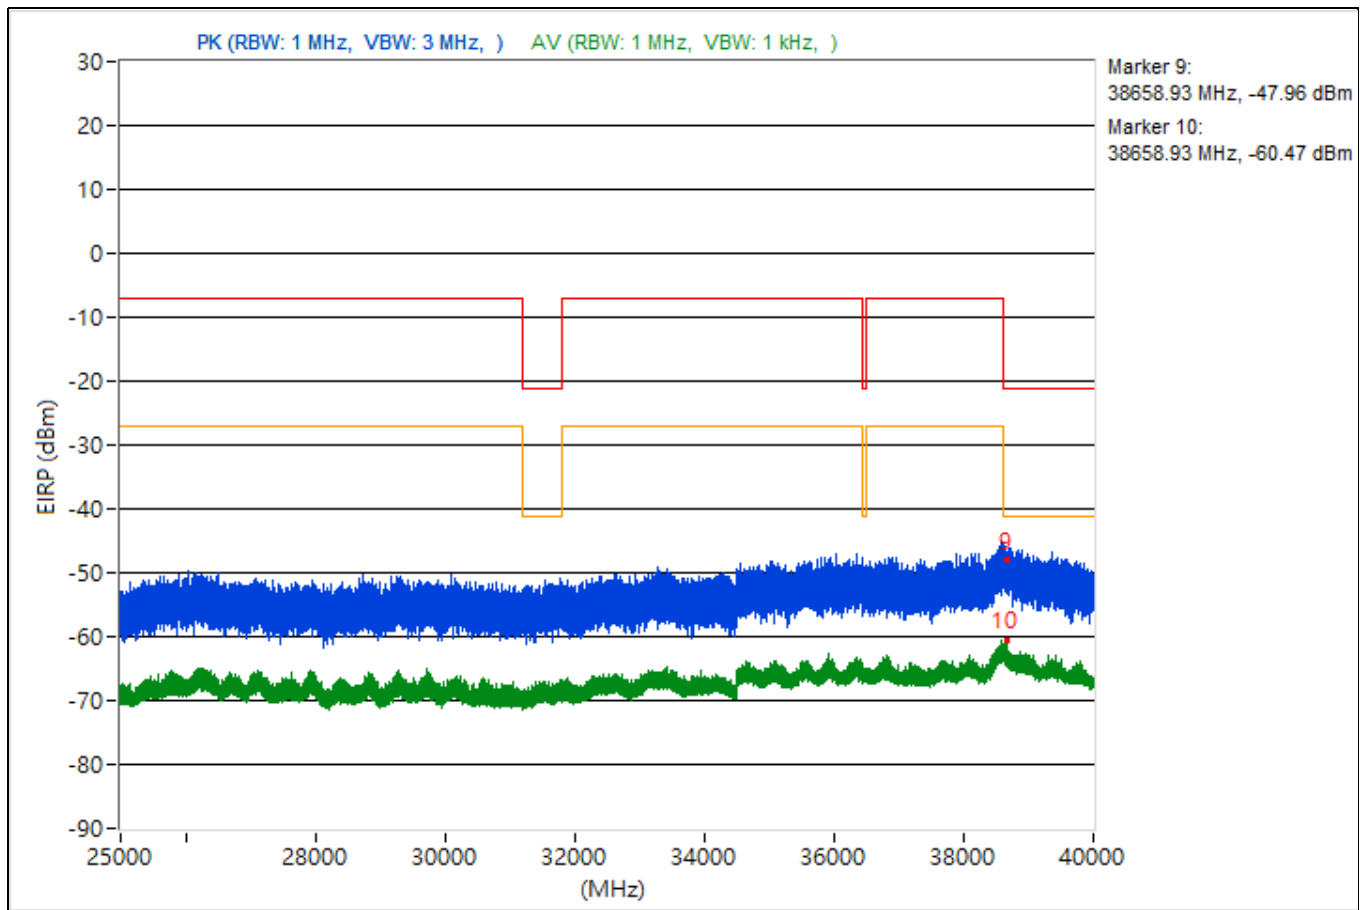


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3773.87	50.9 PK	74	-23.1	-53.39	-51.42	4.92	-44.36
2	3773.87	37.33 AV	54	-16.67	-66.42	-65.37	4.92	-57.93
3	15351.2	47.29 PK	74	-26.71	-55.21	-56.73	4.92	-47.97
4	15351.2	36.53 AV	54	-17.47	-65.33	-68.59	4.92	-58.73
5	19046.9	50.47 PK	74	-23.53	-51.51	-54.41	4.92	-44.79
6	19046.9	37.55 AV	54	-16.45	-67.92	-64.16	4.92	-57.71
7	22354.7	50.03 PK	74	-23.97	-52.32	-54.21	4.92	-45.23
8	22354.7	38.43 AV	54	-15.57	-63.23	-67.14	4.92	-56.83
9	38650.31	45.53 PK	74	-28.47	-55.71	-61.31	4.92	-49.73
10	38650.31	34.47 AV	54	-19.53	-71.23	-67.14	4.92	-60.79

Note: Margin value = Emission Level - Limit value

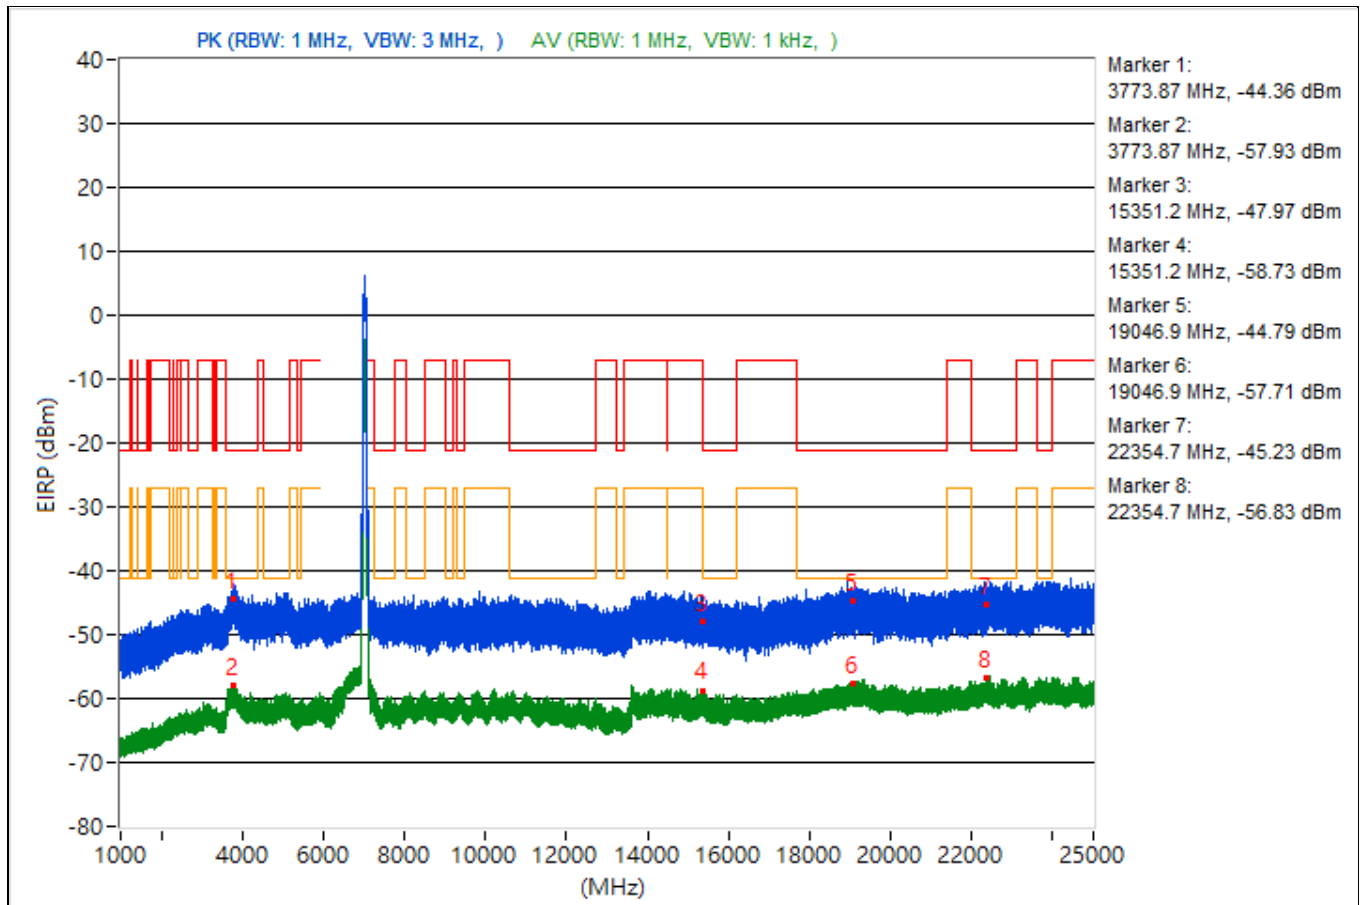


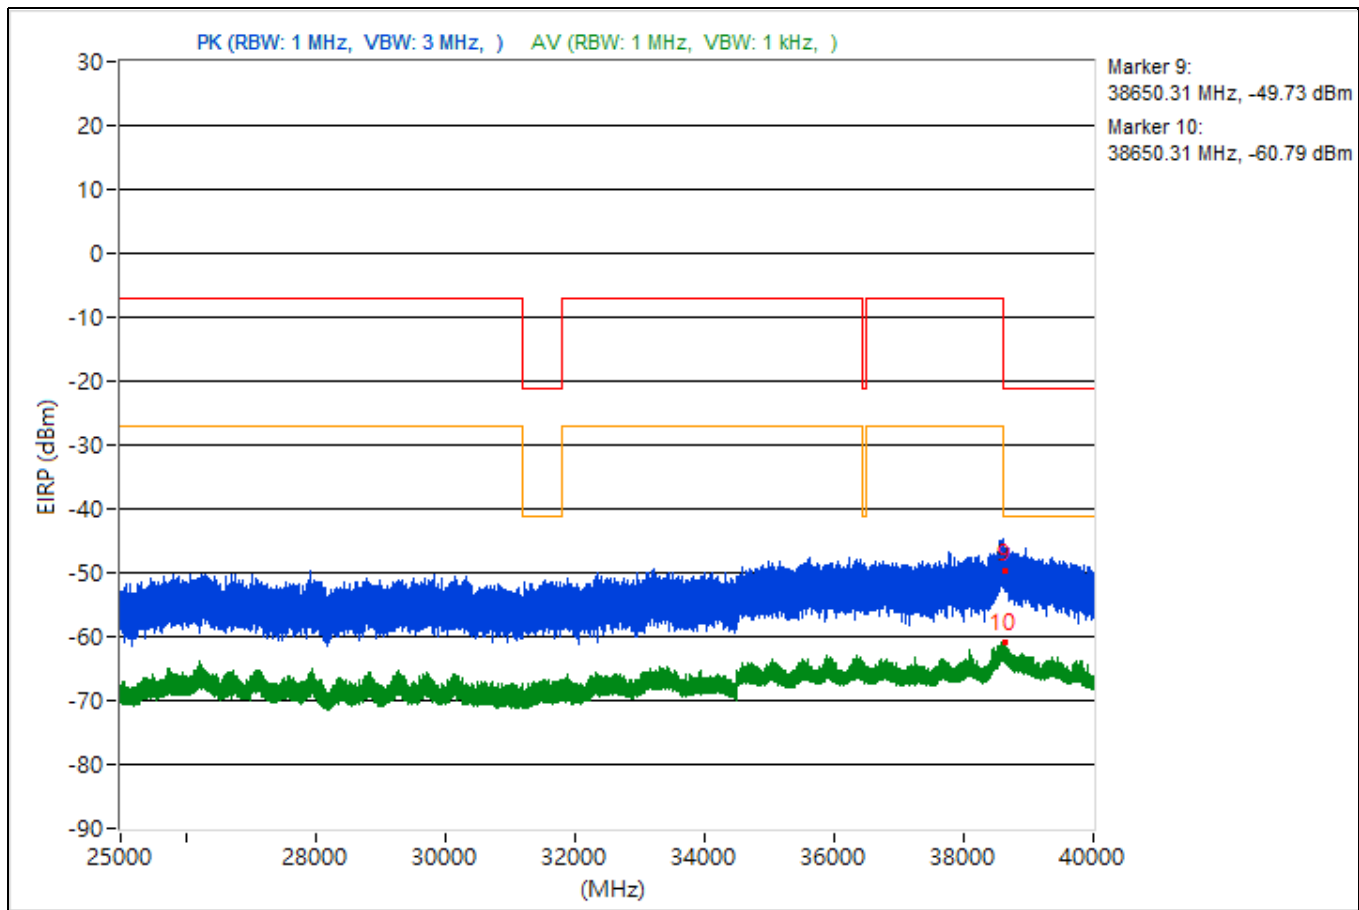


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3754.5	49.7 PK	74	-24.3	-52.15	-55.44	4.92	-45.56
2	3754.5	38 AV	54	-16	-64.21	-66.46	4.92	-57.26
3	14492.89	48.83 PK	74	-25.17	-57.07	-52.7	4.92	-46.43
4	14492.89	37.05 AV	54	-16.95	-65.57	-66.79	4.92	-58.21
5	19325.7	49.81 PK	74	-24.19	-54	-52.83	4.92	-45.45
6	19325.7	37.89 AV	54	-16.11	-67.44	-63.87	4.92	-57.37
7	22426	48.58 PK	74	-25.42	-54.81	-54.43	4.92	-46.68
8	22426	38.5 AV	54	-15.5	-66.27	-63.53	4.92	-56.76
9	38607.02	44.99 PK	74	-29.01	-59.61	-57.14	4.92	-50.27
10	38607.02	34.04 AV	54	-19.96	-71.08	-67.82	4.92	-61.22

Note: Margin value = Emission Level - Limit value

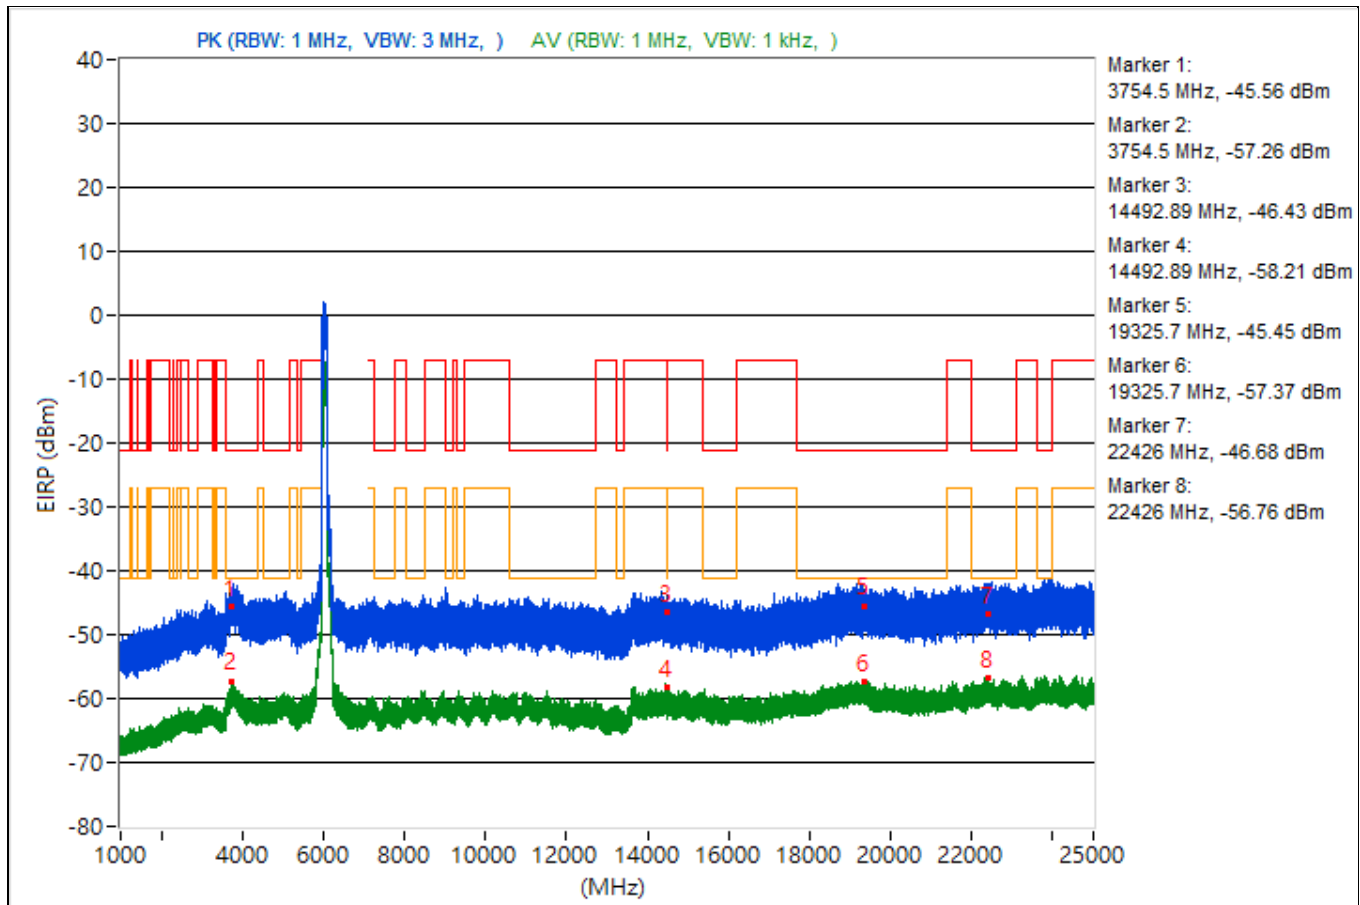


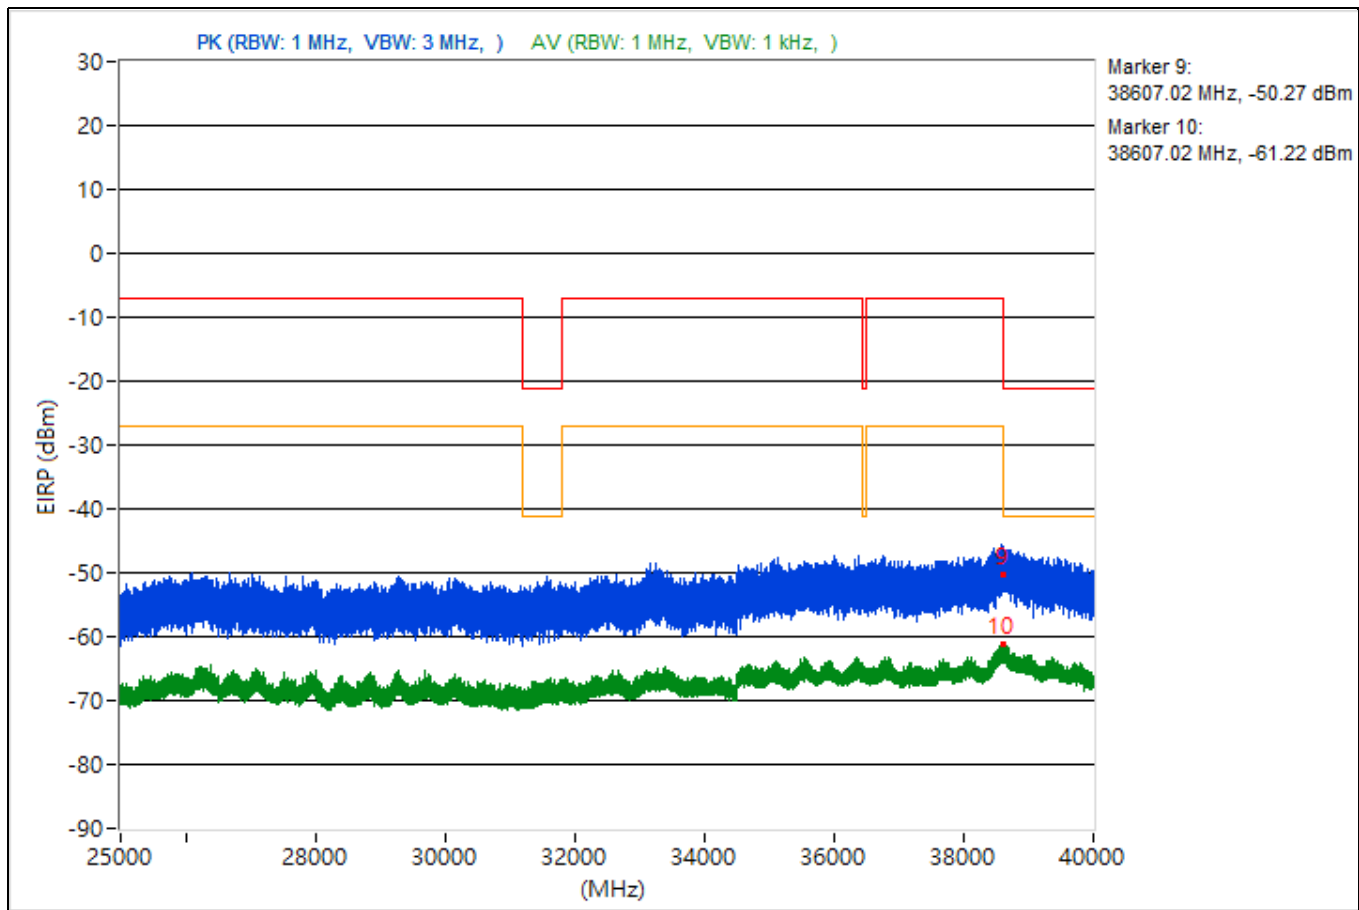


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.6	50.24 PK	74	-23.76	-53.01	-52.88	4.92	-45.02
2	3798.6	37.11 AV	54	-16.89	-68.24	-64.65	4.92	-58.15
3	15392.09	46.3 PK	74	-27.7	-57.07	-56.72	4.92	-48.96
4	15392.09	36.62 AV	54	-17.38	-67.79	-65.62	4.92	-58.64
5	18981.8	48 PK	74	-26	-55.92	-54.57	4.92	-47.26
6	18981.8	38.06 AV	54	-15.94	-66.33	-64.2	4.92	-57.2
7	23636.7	49.93 PK	74	-24.07	-53.21	-53.31	4.92	-45.33
8	23636.7	38.74 AV	54	-15.26	-65.93	-63.35	4.92	-56.52
9	38625.16	45.25 PK	74	-28.75	-59.79	-56.65	4.92	-50.01
10	38625.16	34.13 AV	54	-19.87	-67.51	-71.49	4.92	-61.13

Note: Margin value = Emission Level - Limit value

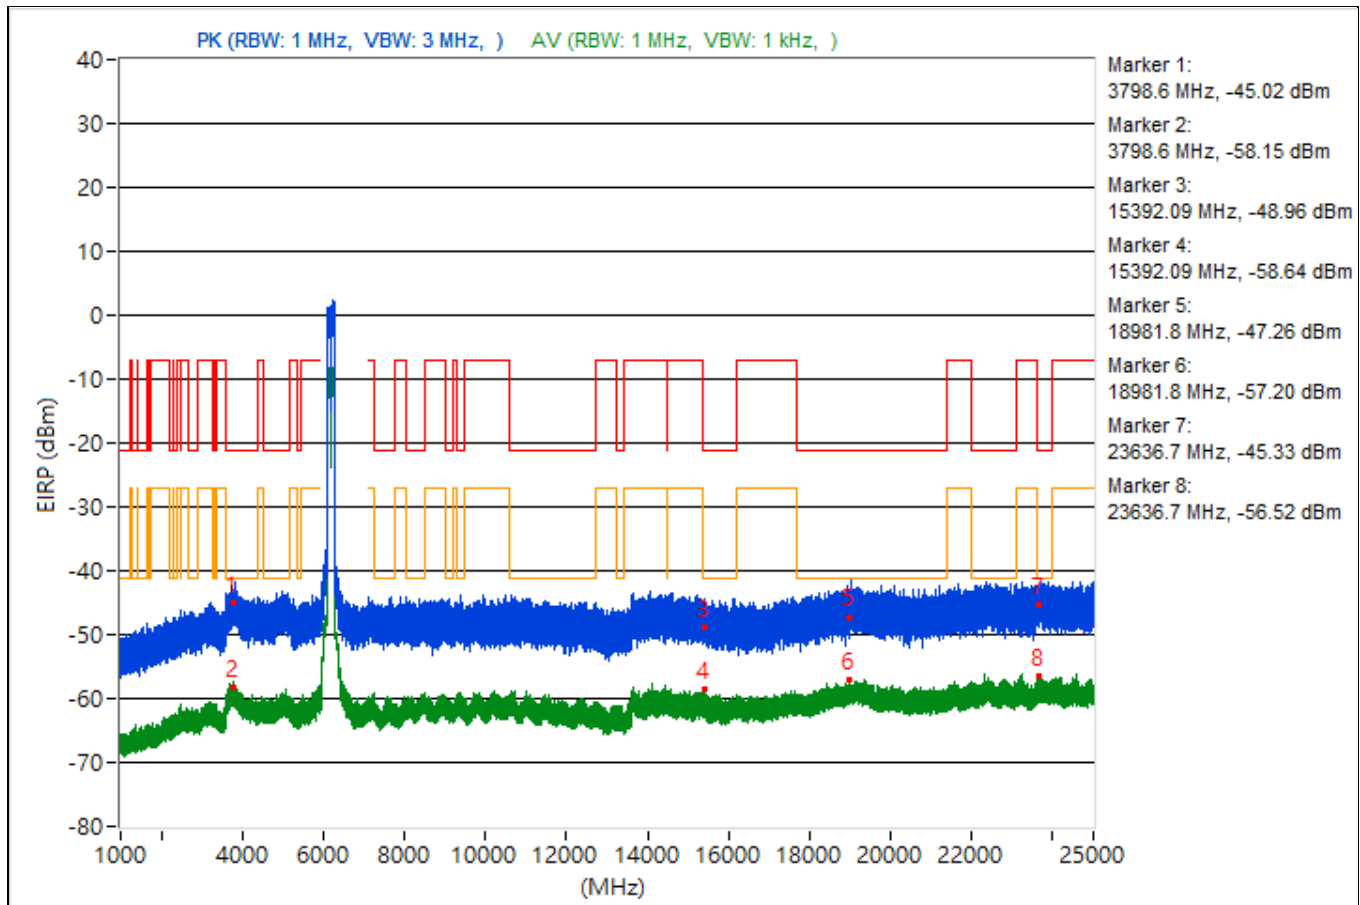


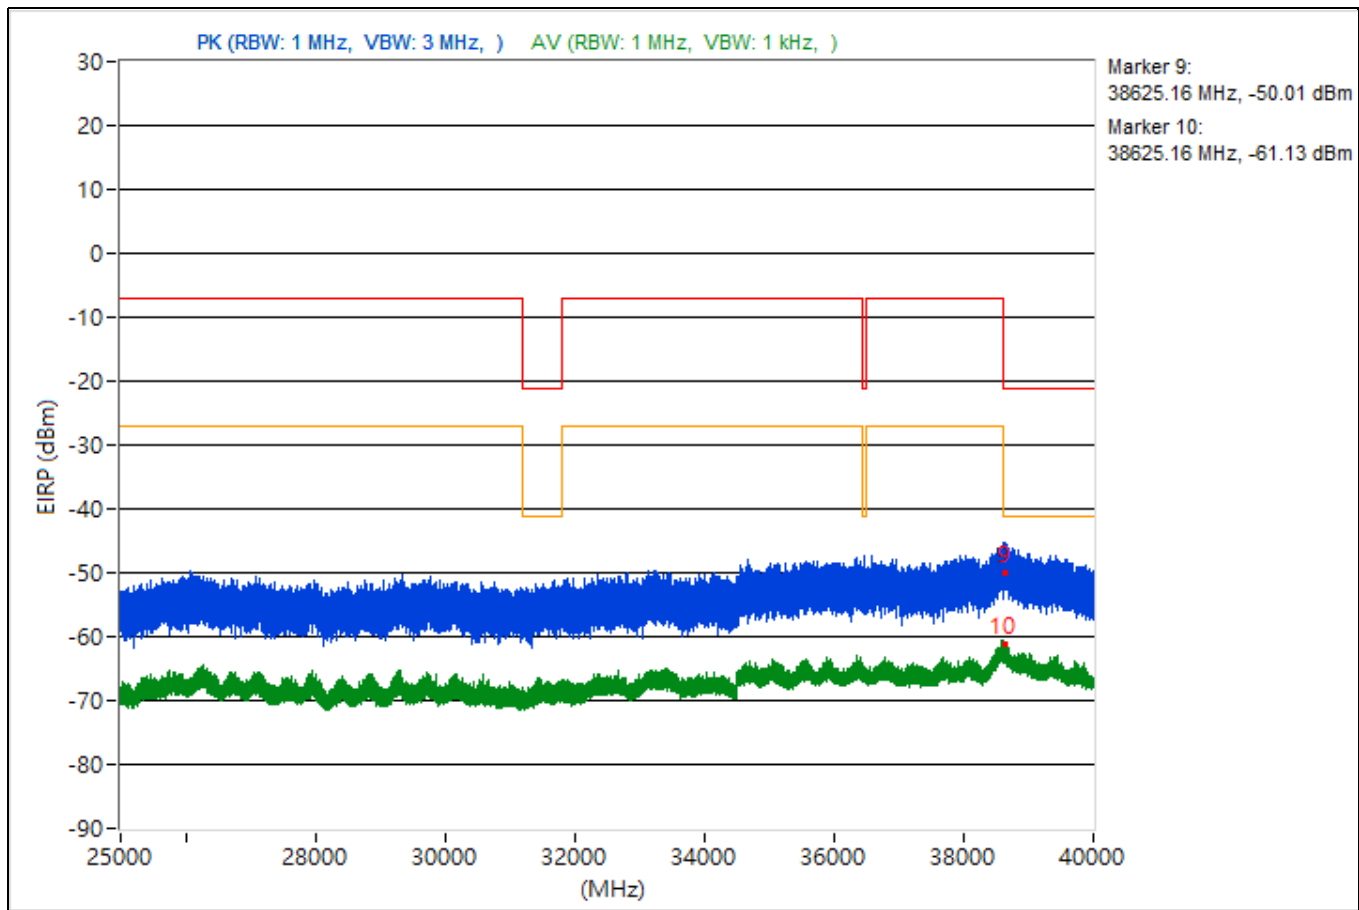


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3743.14	49.2 PK	74	-24.8	-54.5	-53.54	4.92	-46.06
2	3743.14	38.05 AV	54	-15.95	-65.94	-64.47	4.92	-57.21
3	14480.36	48.84 PK	74	-25.16	-53.87	-54.9	4.92	-46.42
4	14480.36	36.51 AV	54	-17.49	-68.12	-65.61	4.92	-58.75
5	19424.4	51.68 PK	74	-22.32	-50.12	-53.58	4.92	-43.58
6	19424.4	38.01 AV	54	-15.99	-63.35	-68.41	4.92	-57.25
7	22414.4	49.4 PK	74	-24.6	-54.82	-52.95	4.92	-45.86
8	22414.4	38.32 AV	54	-15.68	-68.09	-63.05	4.92	-56.94
9	38621.16	46.77 PK	74	-27.23	-56.05	-56.83	4.92	-48.49
10	38621.16	33.96 AV	54	-20.04	-67.97	-71.01	4.92	-61.3

Note: Margin value = Emission Level - Limit value

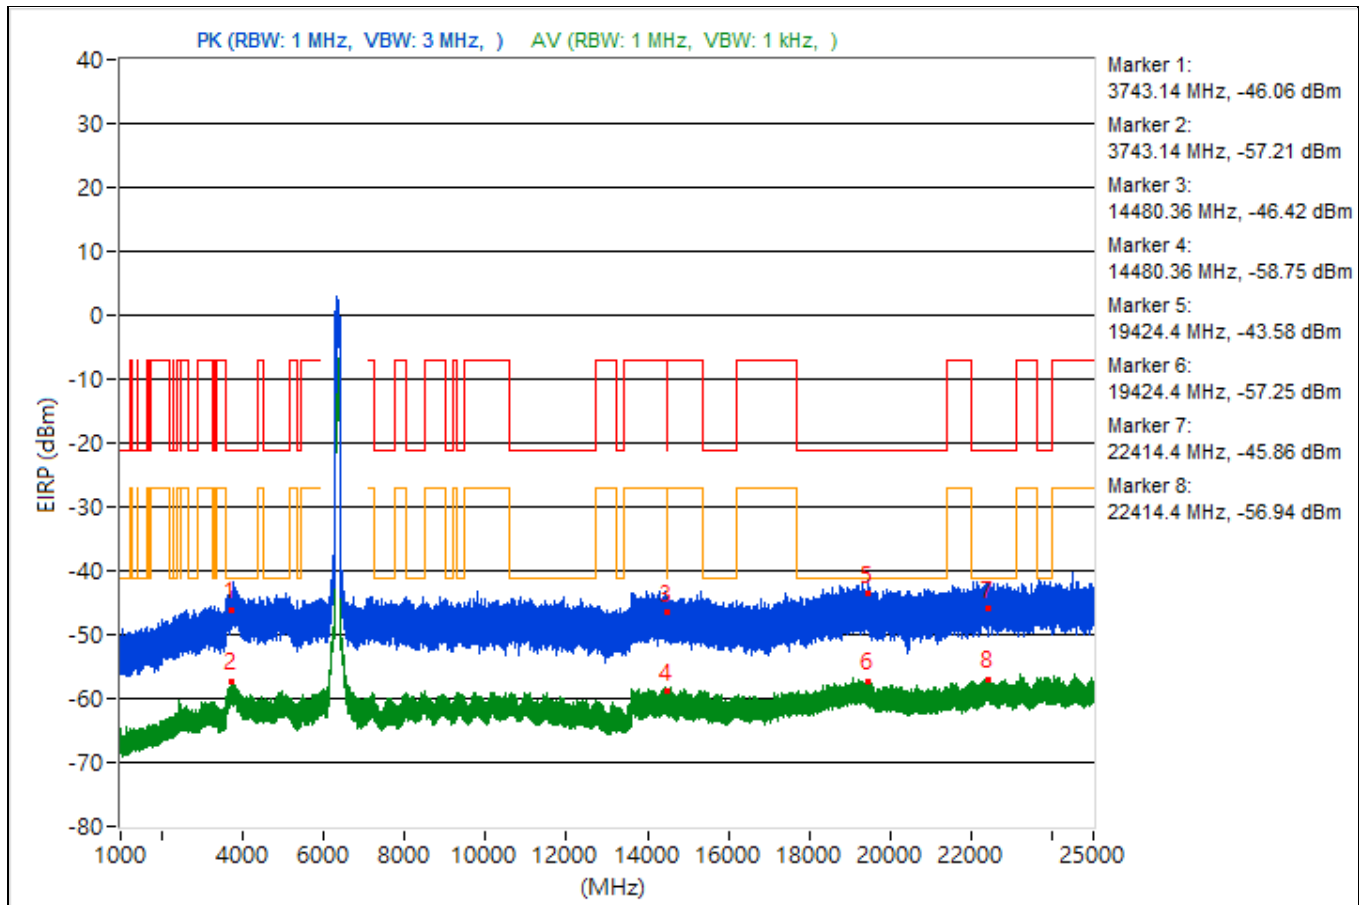


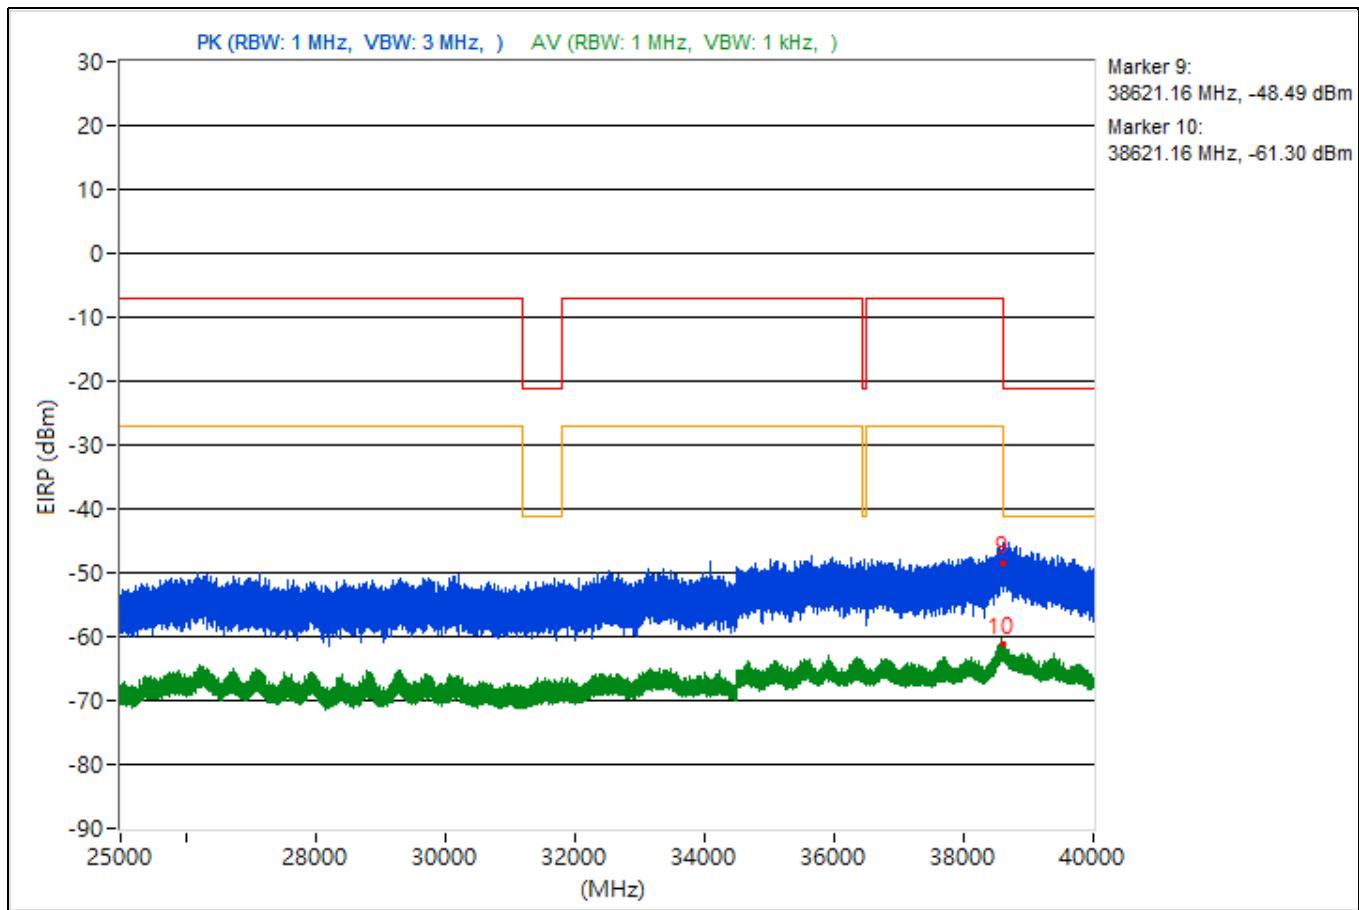


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3785.46	50.93 PK	74	-23.07	-51.98	-52.57	4.92	-44.33
2	3785.46	37.07 AV	54	-16.93	-64.68	-68.27	4.92	-58.19
3	10960.09	47.69 PK	74	-26.31	-55.18	-55.85	4.92	-47.57
4	10960.09	36.04 AV	54	-17.96	-69.43	-65.67	4.92	-59.22
5	18966.3	47.47 PK	74	-26.53	-55.16	-56.37	4.92	-47.79
6	18966.3	37.82 AV	54	-16.18	-64.51	-66.46	4.92	-57.44
7	22416.3	51.56 PK	74	-22.44	-51.14	-52.19	4.92	-43.7
8	22416.3	38.18 AV	54	-15.82	-67.36	-63.5	4.92	-57.08
9	38614.93	46.85 PK	74	-27.15	-55.28	-57.75	4.92	-48.41
10	38614.93	34.45 AV	54	-19.55	-70.83	-67.34	4.92	-60.81

Note: Margin value = Emission Level - Limit value

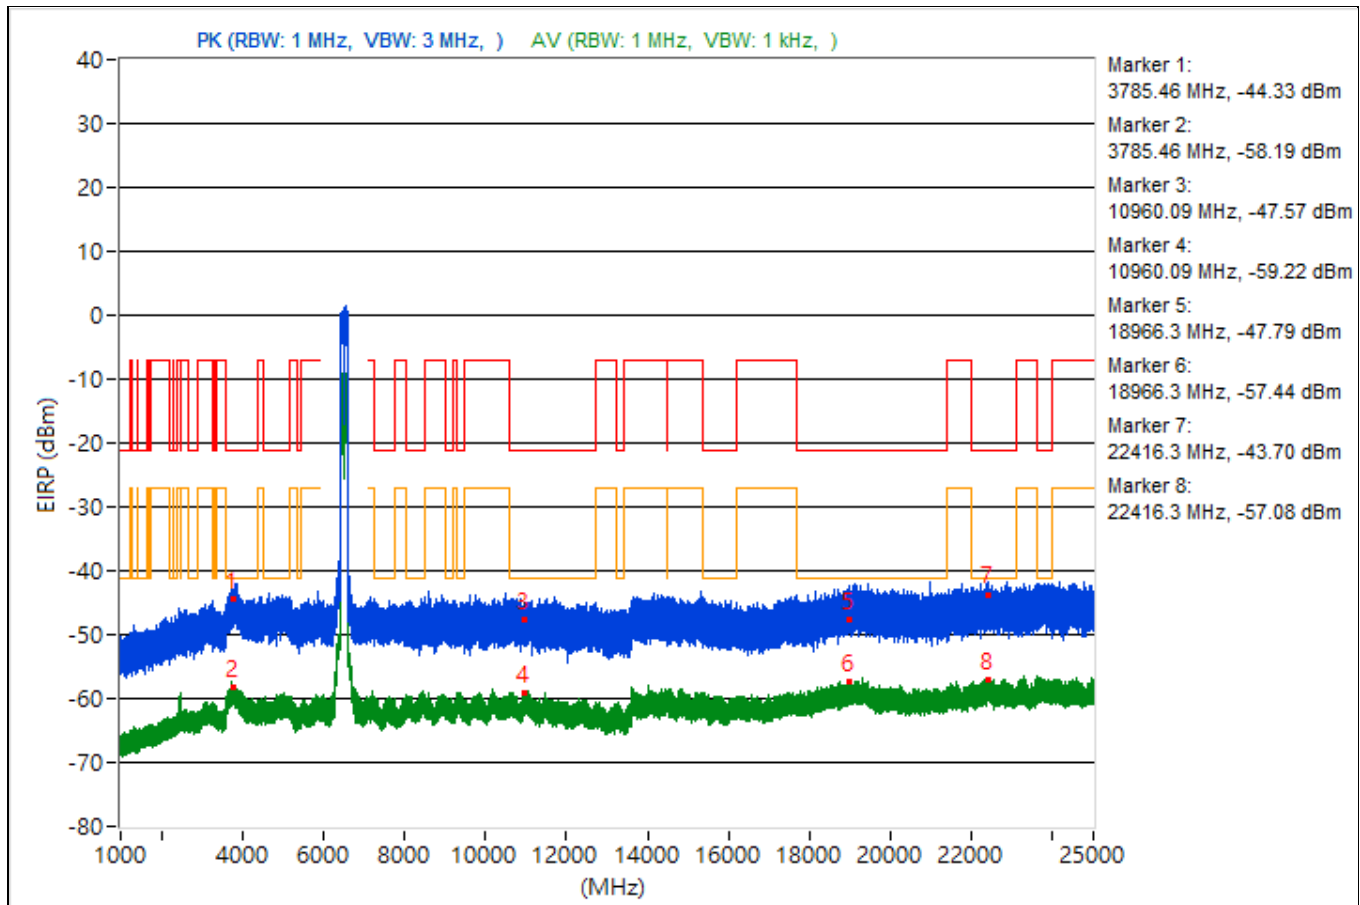


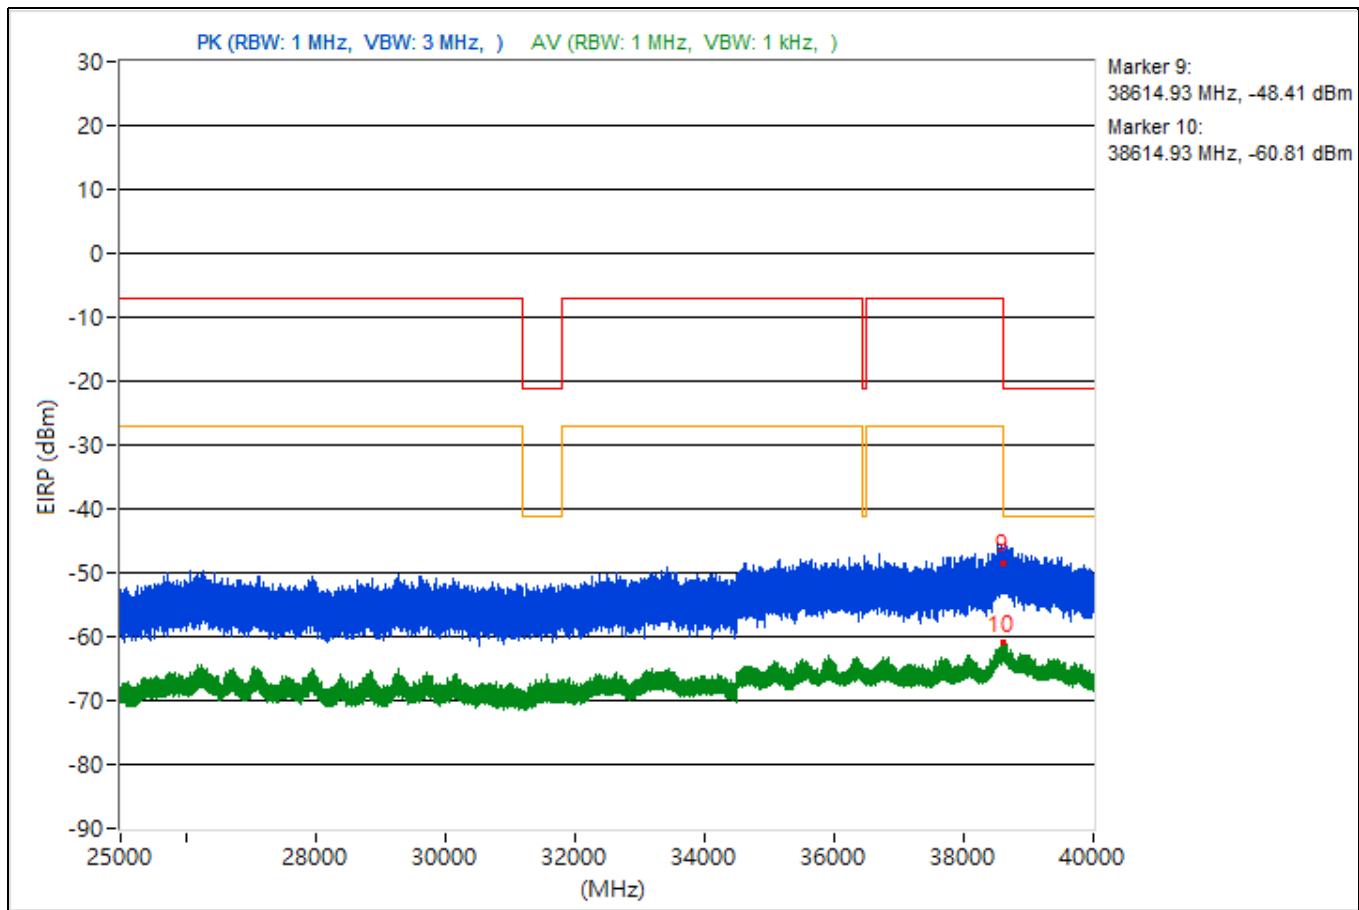


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3775.81	51.29 PK	74	-22.71	-52.31	-51.52	4.92	-43.97
2	3775.81	37.64 AV	54	-16.36	-67.37	-64.27	4.92	-57.62
3	14474.49	46.46 PK	74	-27.54	-57.11	-56.38	4.92	-48.8
4	14474.49	36.49 AV	54	-17.51	-65.27	-68.85	4.92	-58.77
5	19120.6	49.87 PK	74	-24.13	-51.41	-56.81	4.92	-45.39
6	19120.6	38.1 AV	54	-15.9	-64.22	-66.17	4.92	-57.16
7	22343.1	48.65 PK	74	-25.35	-56.59	-53.15	4.92	-46.61
8	22343.1	38.74 AV	54	-15.26	-65.97	-63.32	4.92	-56.52
9	38616.18	46.58 PK	74	-27.42	-55.95	-57.39	4.92	-48.68
10	38616.18	34.02 AV	54	-19.98	-68.14	-70.52	4.92	-61.24

Note: Margin value = Emission Level - Limit value

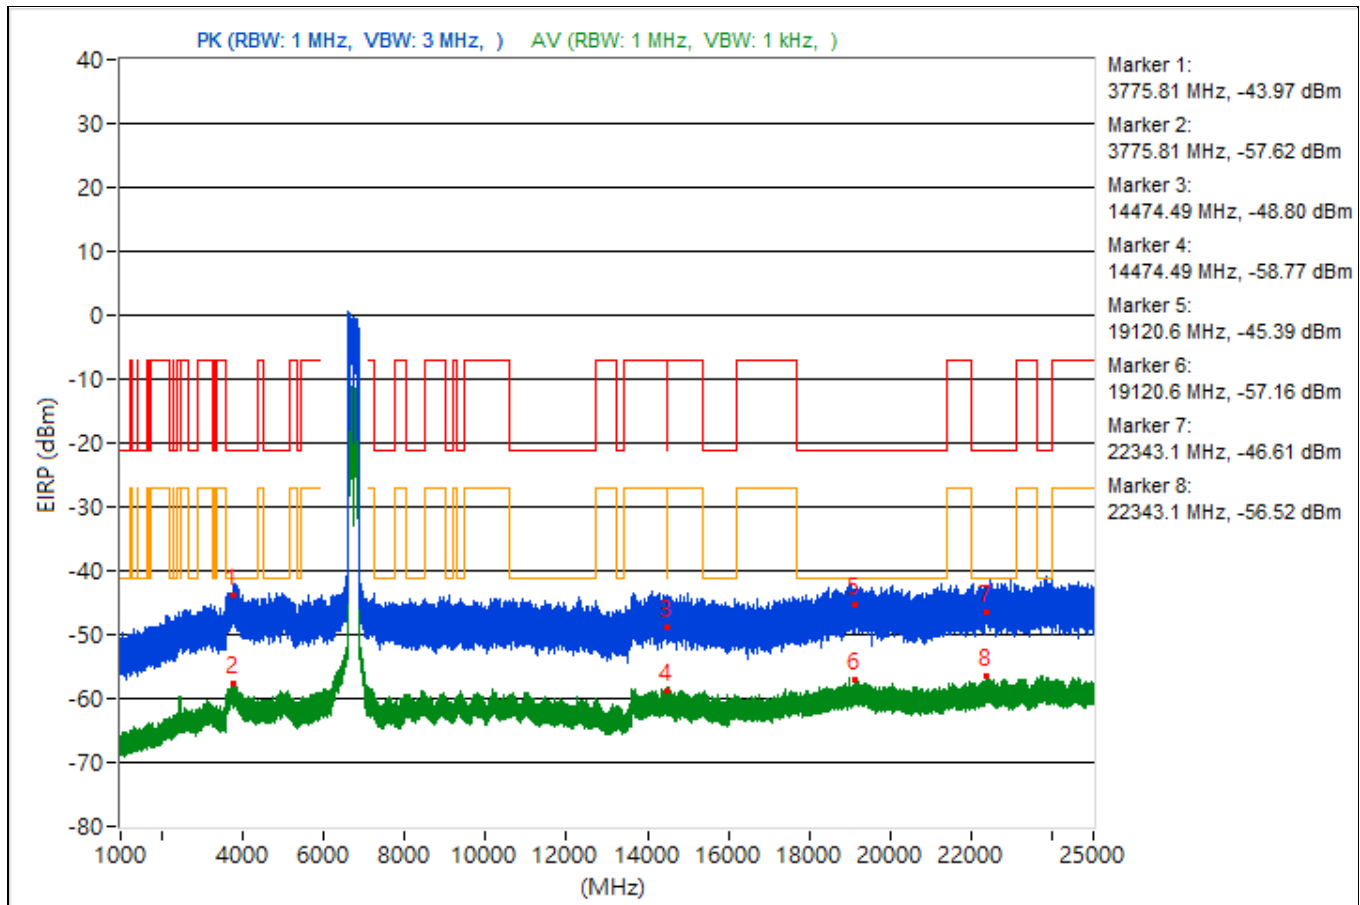


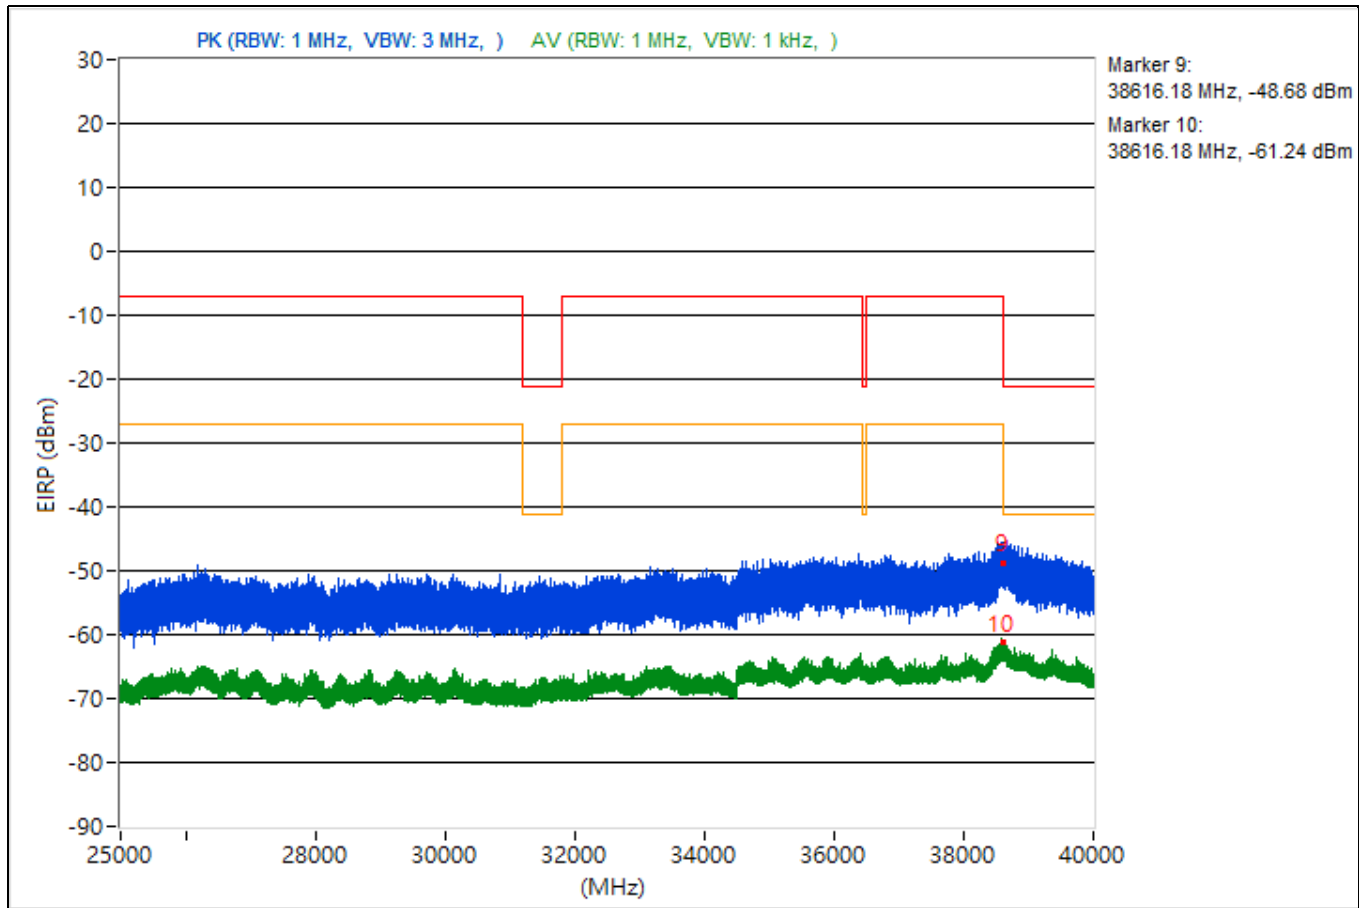


RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3787.24	49.53 PK	74	-24.47	-52.16	-55.97	4.92	-45.73
2	3787.24	37.17 AV	54	-16.83	-68.02	-64.66	4.92	-58.09
3	14481.69	47.83 PK	74	-26.17	-54.01	-57.34	4.92	-47.43
4	14481.69	36 AV	54	-18	-69.1	-65.87	4.92	-59.26
5	19311.9	49.53 PK	74	-24.47	-53.62	-53.7	4.92	-45.73
6	19311.9	37.67 AV	54	-16.33	-67.82	-64.03	4.92	-57.59
7	22405.8	49.37 PK	74	-24.63	-53.42	-54.25	4.92	-45.89
8	22405.8	38.8 AV	54	-15.2	-62.87	-66.77	4.92	-56.46
9	38610.04	46.26 PK	74	-27.74	-56.26	-57.72	4.92	-49
10	38610.04	34.36 AV	54	-19.64	-70.05	-67.88	4.92	-60.9

Note: Margin value = Emission Level - Limit value

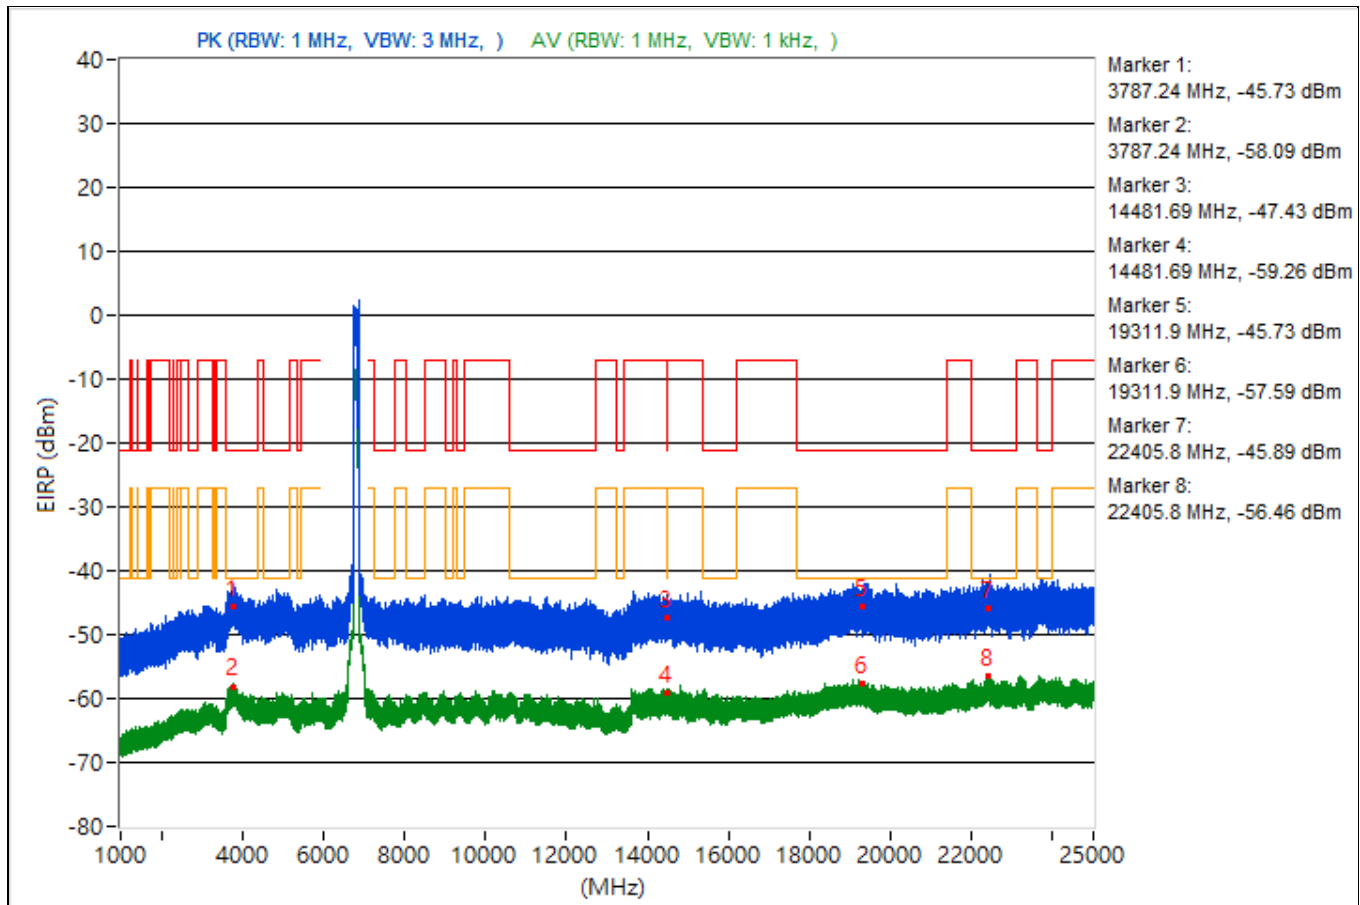


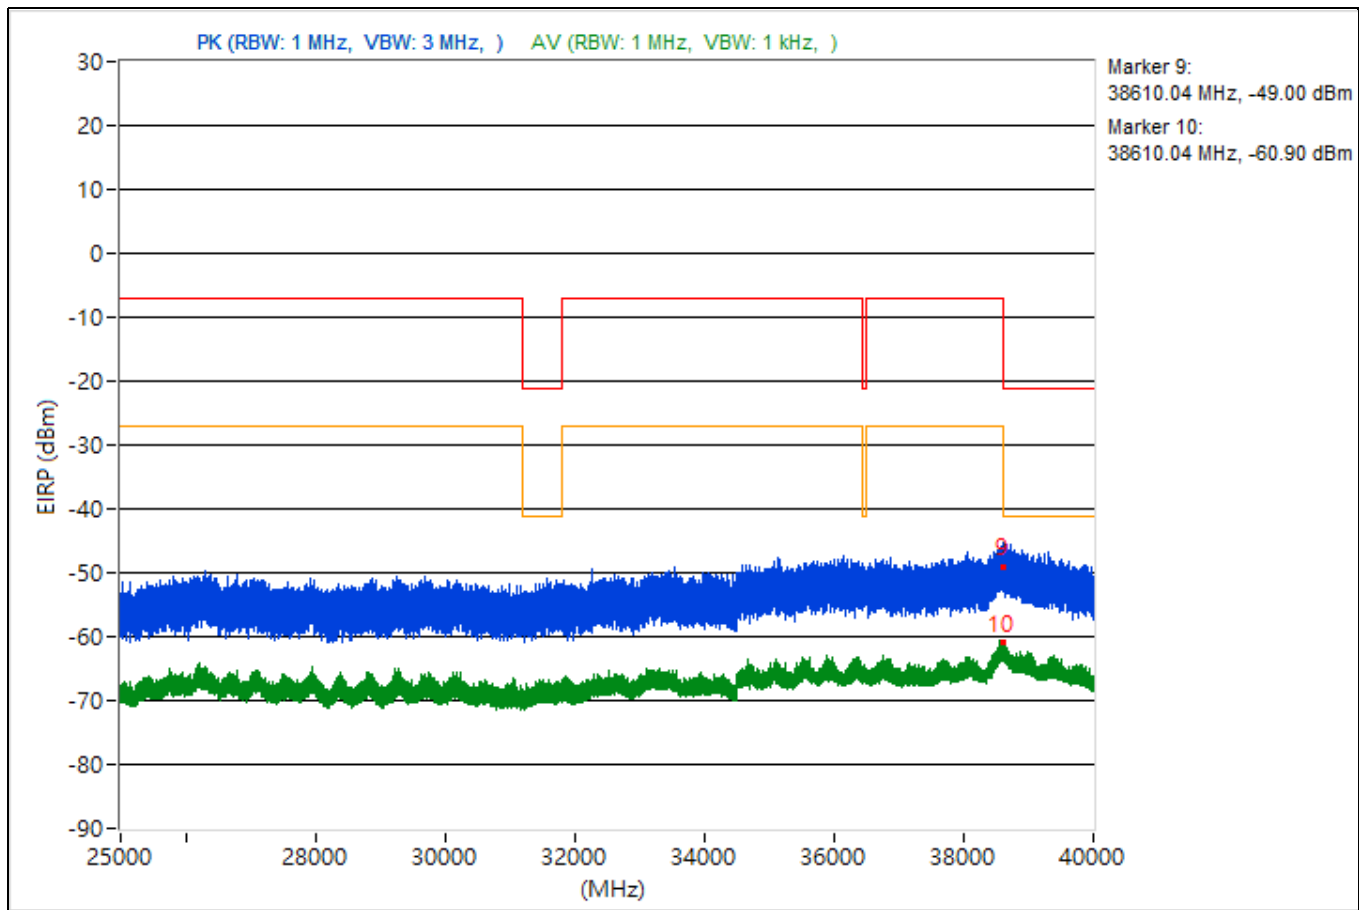


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	26°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3752.4	48.3 PK	74	-25.7	-56.65	-53.64	4.92	-46.96
2	3752.4	37.81 AV	54	-16.19	-66.12	-64.75	4.92	-57.45
3	14476.98	49.37 PK	74	-24.63	-53.61	-54.04	4.92	-45.89
4	14476.98	36.77 AV	54	-17.23	-65.07	-68.39	4.92	-58.49
5	19245.4	49.38 PK	74	-24.62	-54.02	-53.61	4.92	-45.88
6	19245.4	37.74 AV	54	-16.26	-67.21	-64.21	4.92	-57.52
7	22465.5	51.03 PK	74	-22.97	-53.58	-51.09	4.92	-44.23
8	22465.5	38.75 AV	54	-15.25	-63.48	-65.69	4.92	-56.51
9	38600.44	45.18 PK	74	-28.82	-58.18	-57.83	4.92	-50.08
10	38600.44	34.53 AV	54	-19.47	-67.58	-70.12	4.92	-60.73

Note: Margin value = Emission Level - Limit value

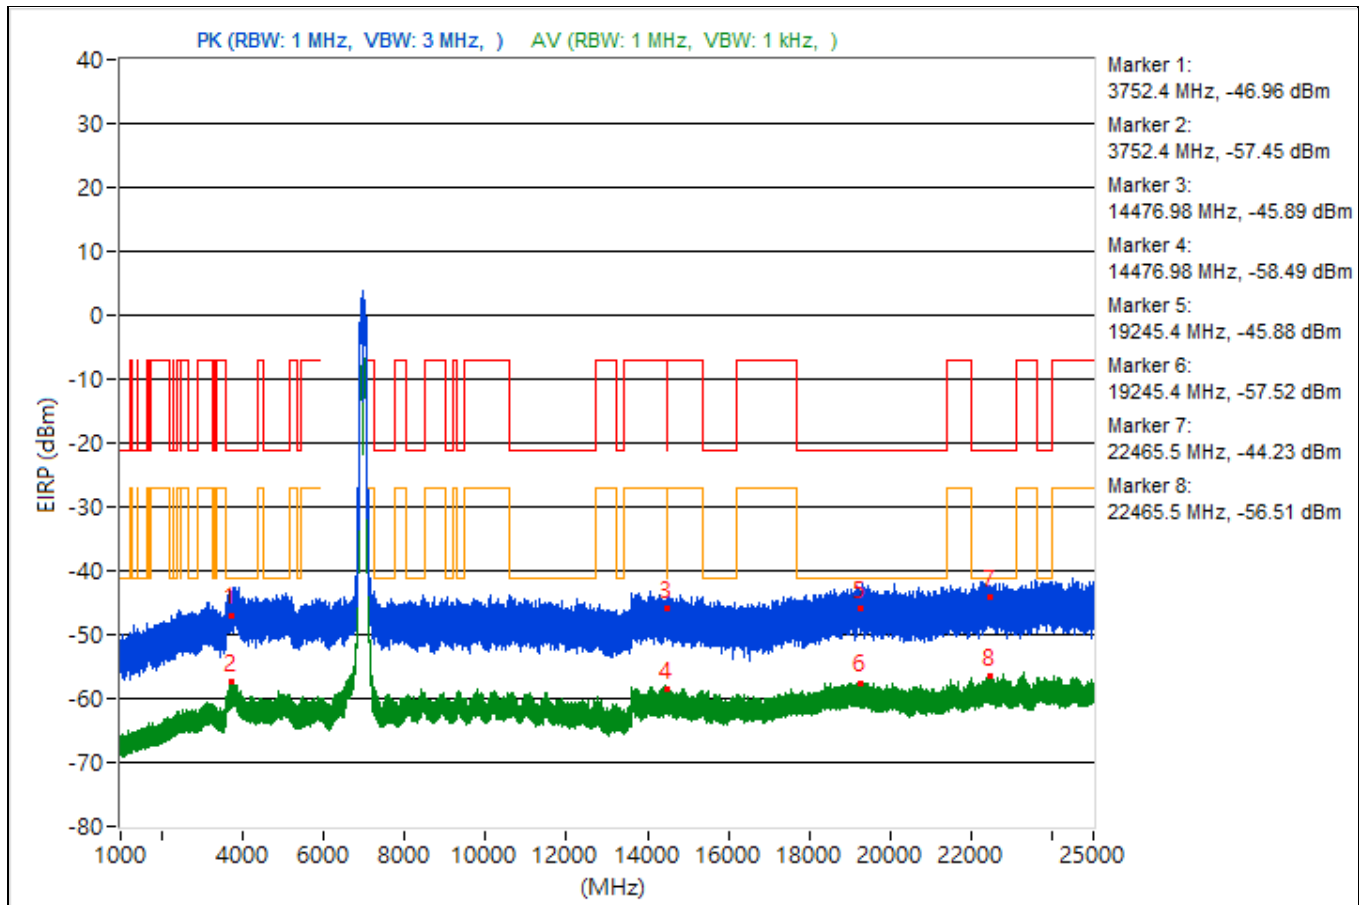


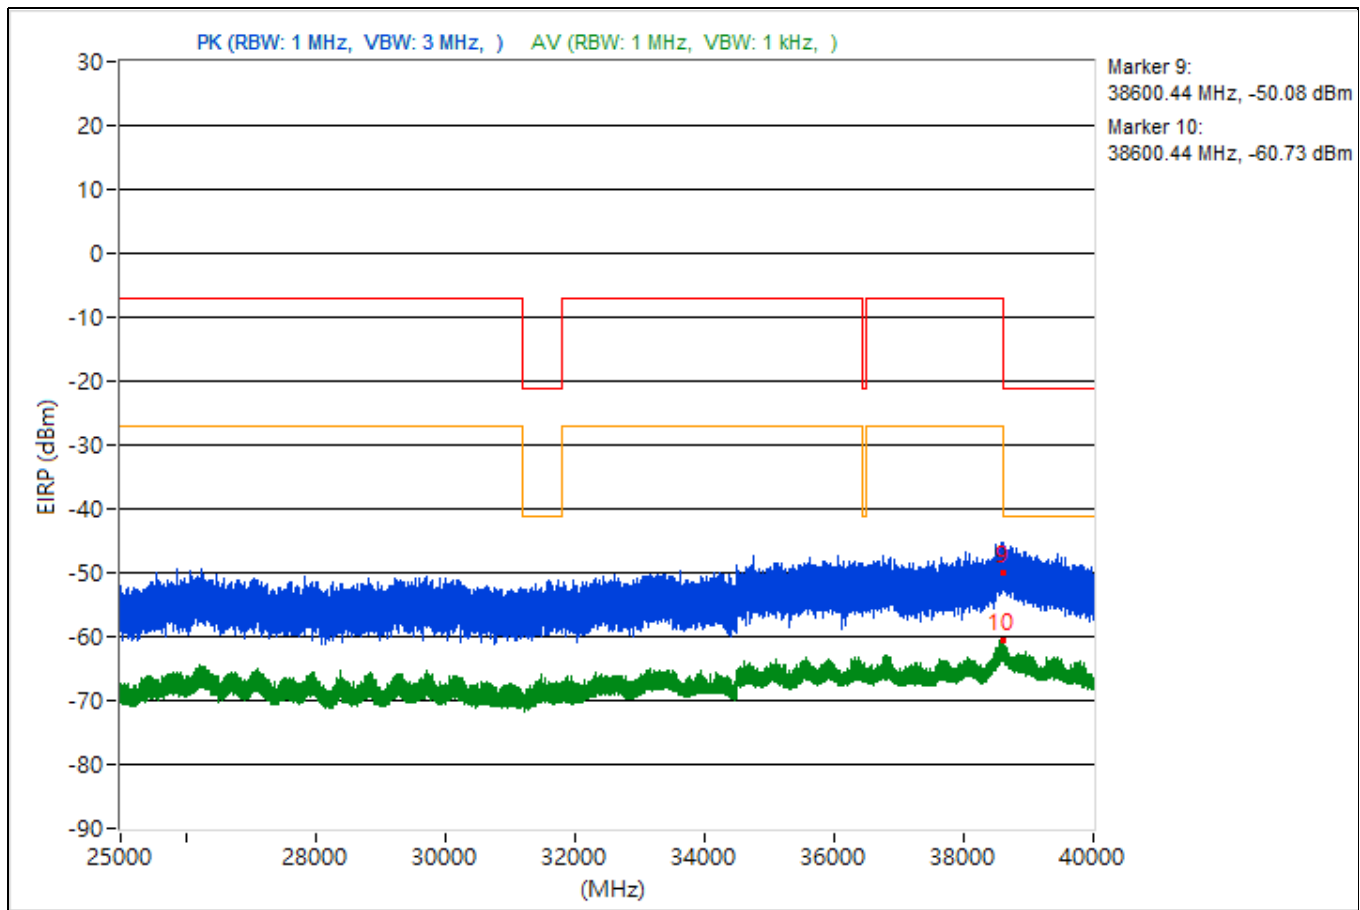


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3878.48	47.83 PK	74	-26.17	-54.88	-55.89	4.92	-47.43
2	3878.48	38.8 AV	54	-15.2	-66	-63.22	4.92	-56.46
3	14470.22	48.93 PK	74	-25.07	-53.54	-55.11	4.92	-46.33
4	14470.22	37.4 AV	54	-16.6	-67	-64.84	4.92	-57.86
5	19941.2	48.39 PK	74	-25.61	-53.87	-55.97	4.92	-46.87
6	19941.2	38.49 AV	54	-15.51	-66.45	-63.46	4.92	-56.77
7	22414.8	49.83 PK	74	-24.17	-55.86	-51.78	4.92	-45.43
8	22414.8	39.06 AV	54	-14.94	-63.09	-65.5	4.92	-56.2
9	38669.24	47.65 PK	74	-26.35	-54.47	-56.96	4.92	-47.61
10	38669.24	35.63 AV	54	-18.37	-69.33	-66.31	4.92	-59.63

Note: Margin value = Emission Level - Limit value

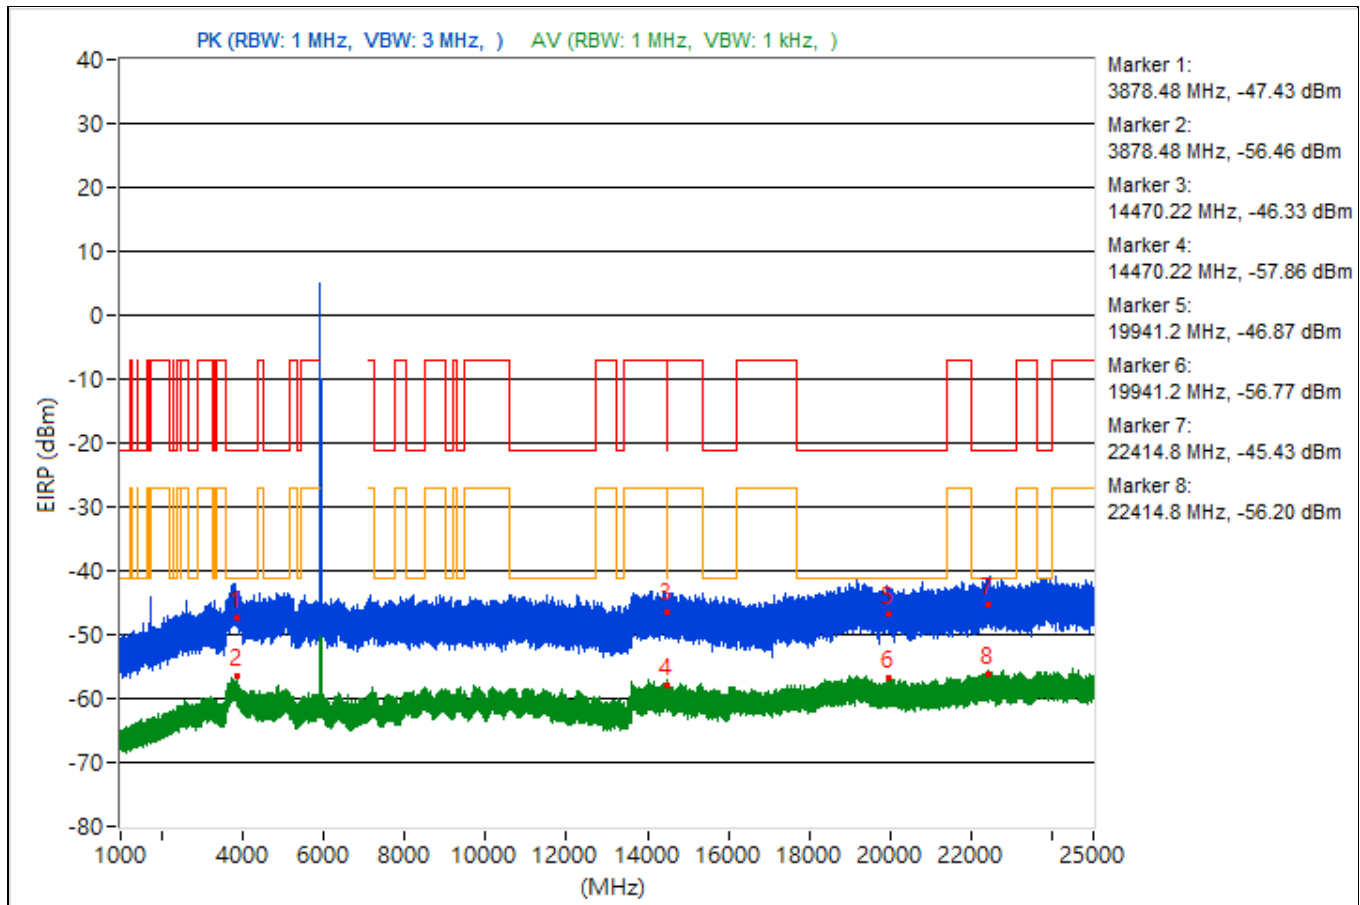


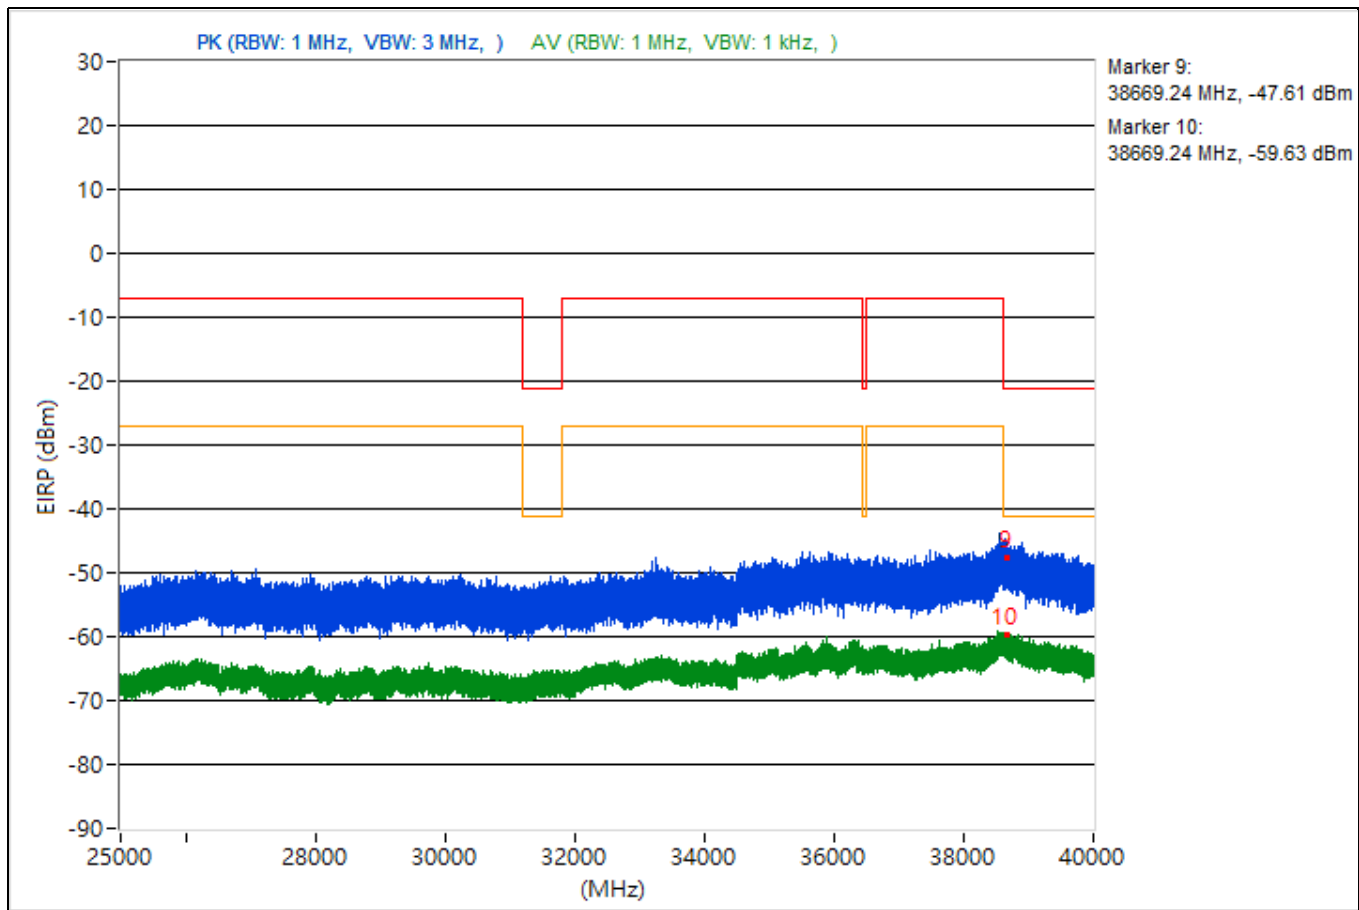


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3766.94	51.07 PK	74	-22.93	-52.75	-51.56	4.92	-44.19
2	3766.94	38.21 AV	54	-15.79	-63.88	-66.46	4.92	-57.05
3	14487.11	47.89 PK	74	-26.11	-55.75	-54.9	4.92	-47.37
4	14487.11	36.99 AV	54	-17.01	-67.92	-64.98	4.92	-58.27
5	19337.1	50.29 PK	74	-23.71	-52.42	-53.45	4.92	-44.97
6	19337.1	38.49 AV	54	-15.51	-63.6	-66.18	4.92	-56.77
7	22402.6	51.65 PK	74	-22.35	-51.31	-51.78	4.92	-43.61
8	22402.6	39.29 AV	54	-14.71	-62.38	-66.26	4.92	-55.97
9	38603.91	47.22 PK	74	-26.78	-54.09	-59.38	4.92	-48.04
10	38603.91	36.73 AV	54	-17.27	-68.3	-65.18	4.92	-58.53

Note: Margin value = Emission Level - Limit value

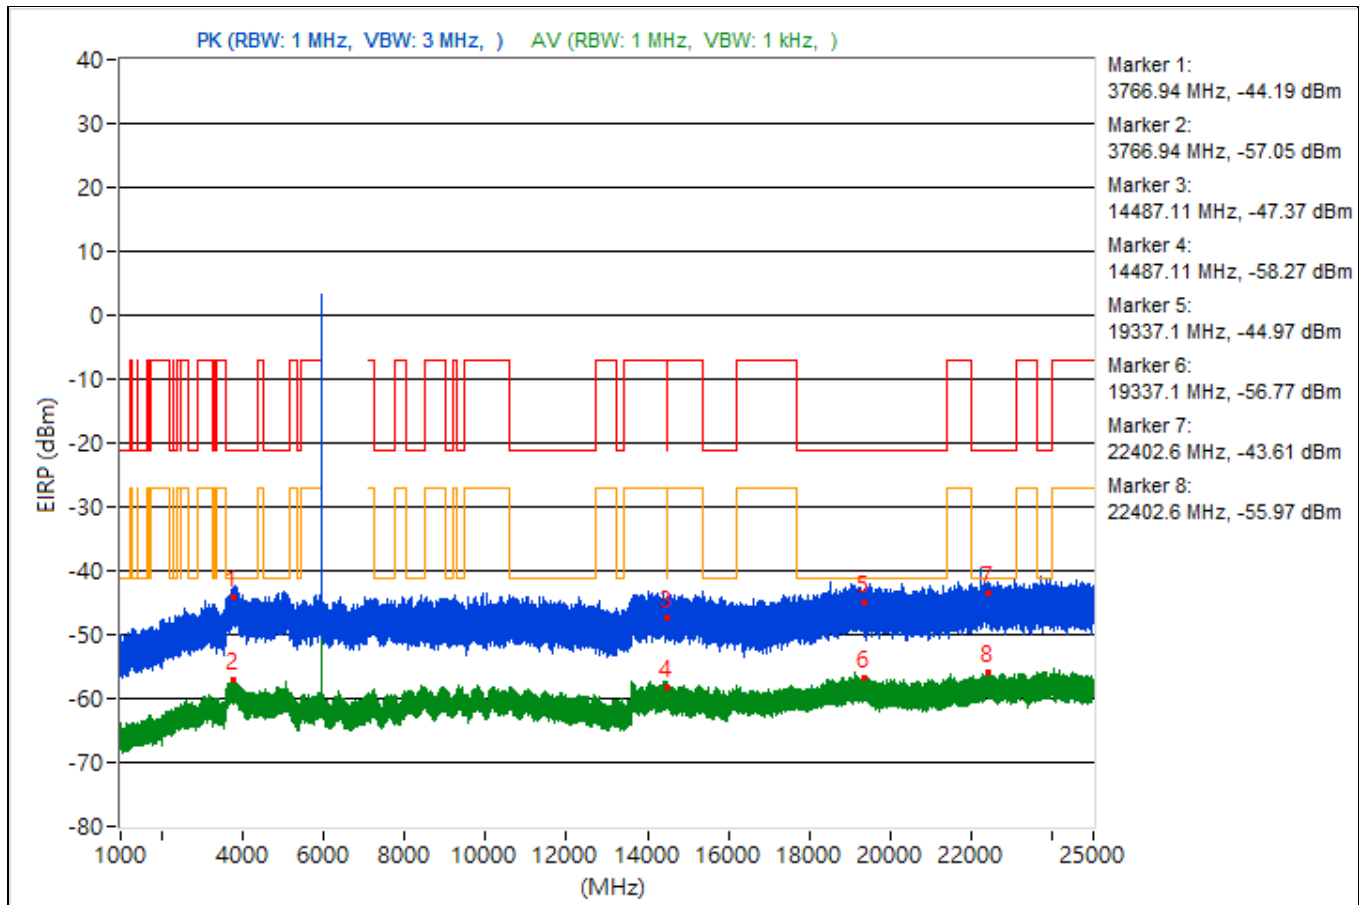


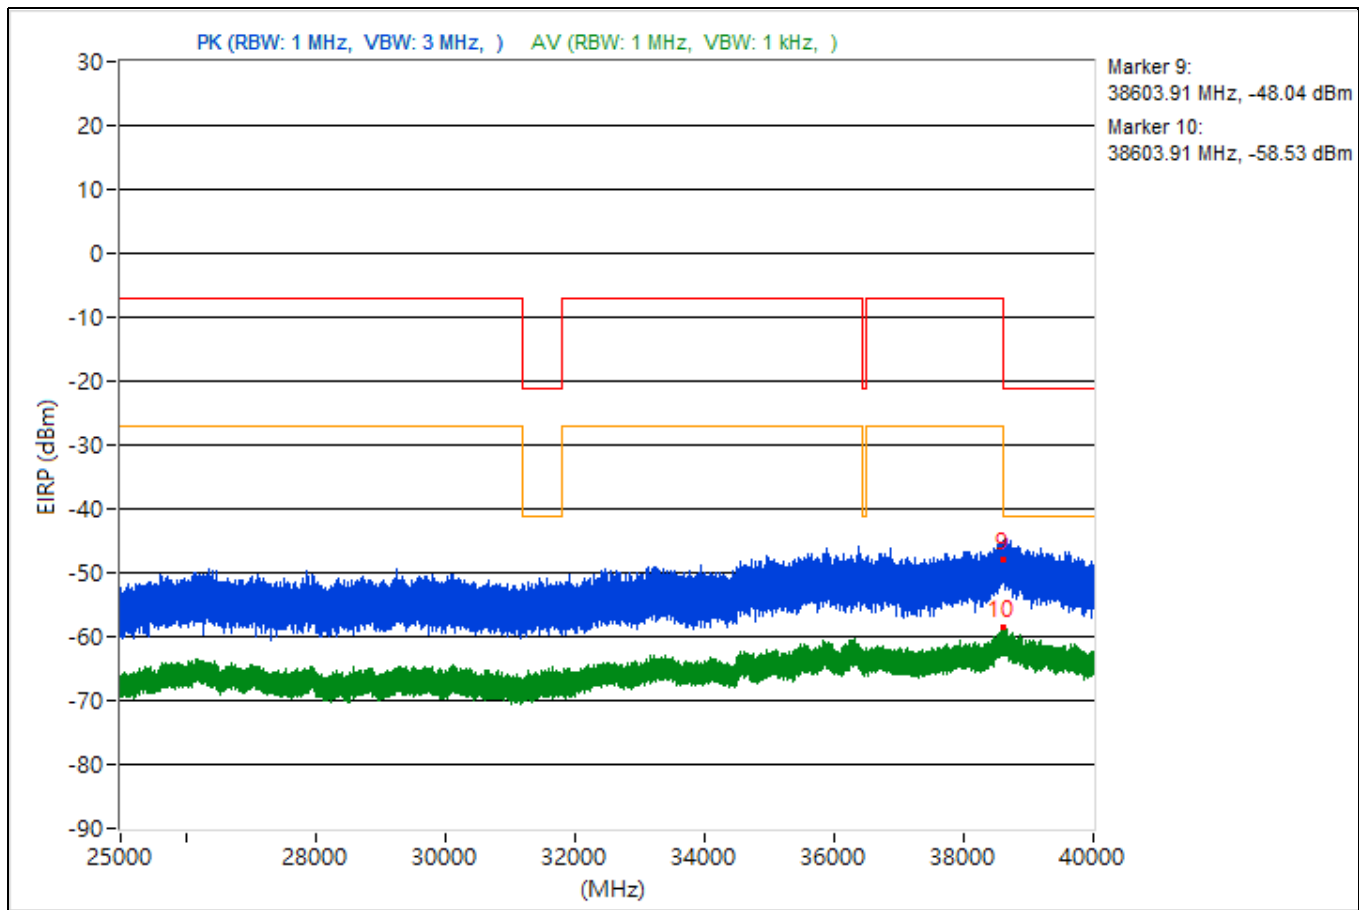


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3804.51	51.34 PK	74	-22.66	-50.13	-54.74	4.92	-43.92
2	3804.51	38.5 AV	54	-15.5	-65.58	-63.95	4.92	-56.76
3	14476.09	49.57 PK	74	-24.43	-54.49	-52.9	4.92	-45.69
4	14476.09	37.2 AV	54	-16.8	-67.18	-65.06	4.92	-58.06
5	19403.6	48.28 PK	74	-25.72	-55.12	-54.72	4.92	-46.98
6	19403.6	38.92 AV	54	-15.08	-65.04	-63.61	4.92	-56.34
7	23806.8	50.04 PK	74	-23.96	-52.1	-54.54	4.92	-45.22
8	23806.8	39.8 AV	54	-14.2	-64.43	-62.55	4.92	-55.46
9	38625.69	47.43 PK	74	-26.57	-56.77	-54.93	4.92	-47.83
10	38625.69	35.96 AV	54	-18.04	-65.9	-69.16	4.92	-59.3

Note: Margin value = Emission Level - Limit value

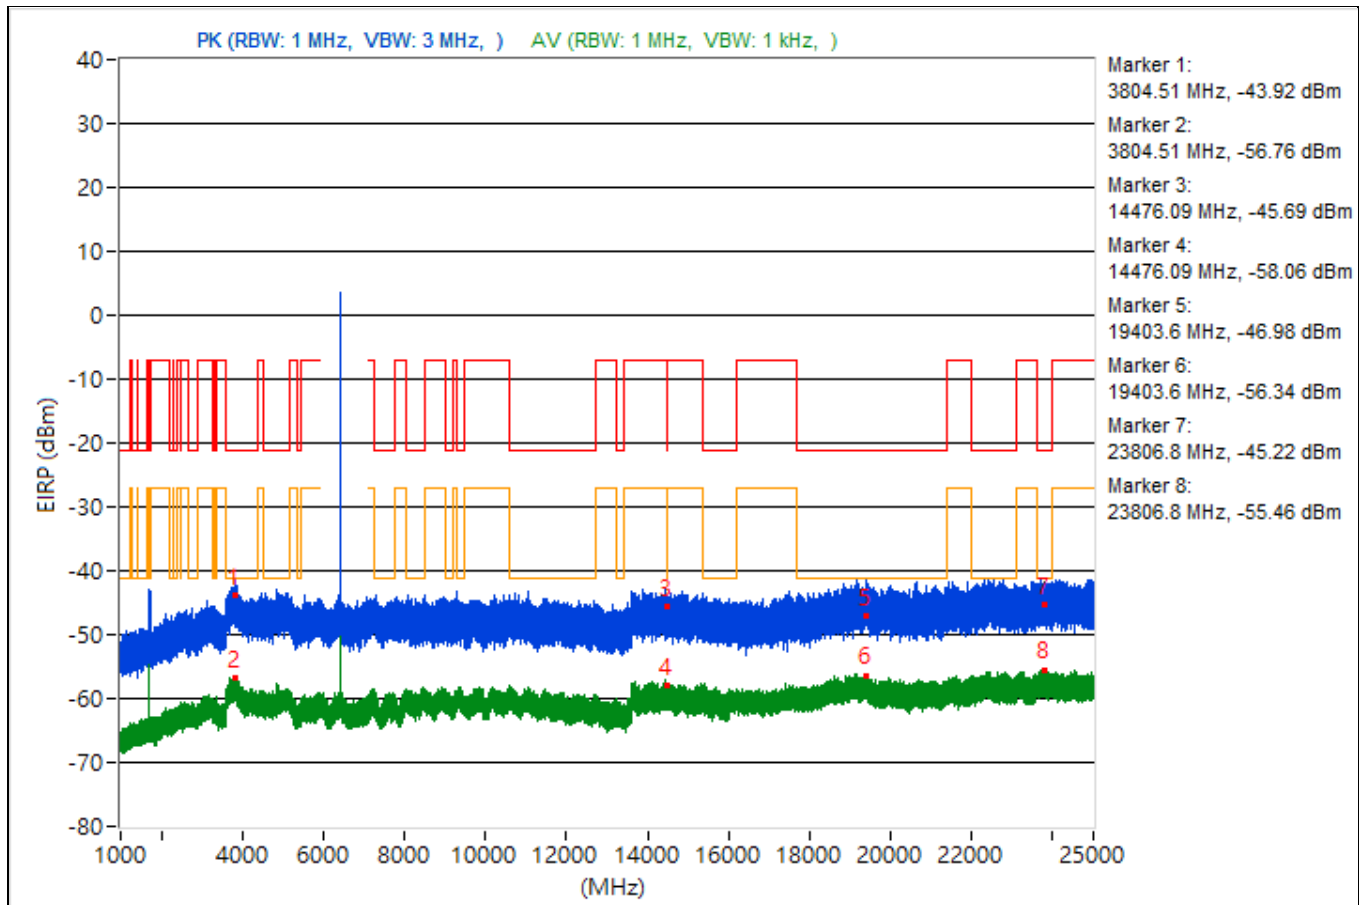


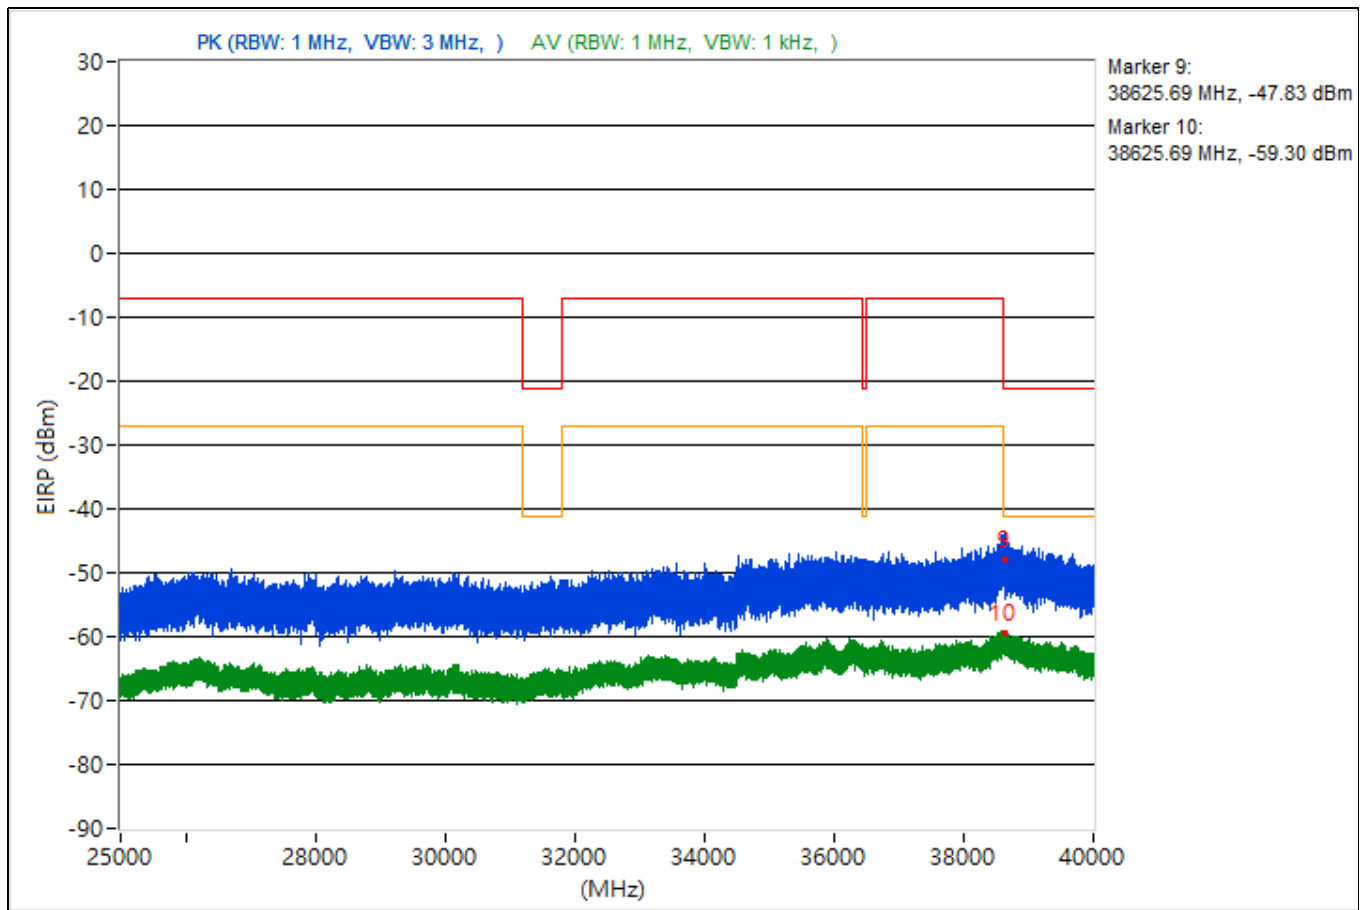


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3858.1	49.45 PK	74	-24.55	-52.97	-54.68	4.92	-45.81
2	3858.1	38.48 AV	54	-15.52	-66.76	-63.33	4.92	-56.78
3	15716.71	46.17 PK	74	-27.83	-56.93	-57.12	4.92	-49.09
4	15716.71	36.97 AV	54	-17.03	-68.67	-64.66	4.92	-58.29
5	19344.3	48.75 PK	74	-25.25	-54.75	-54.16	4.92	-46.51
6	19344.3	38.88 AV	54	-15.12	-63.32	-65.61	4.92	-56.38
7	23796.6	51.29 PK	74	-22.71	-53.36	-50.81	4.92	-43.97
8	23796.6	39.41 AV	54	-14.59	-62.91	-64.86	4.92	-55.85
9	38625.07	43.29 PK	74	-30.71	-58.95	-61.11	4.92	-51.97
10	38625.07	35.74 AV	54	-18.26	-69.89	-65.9	4.92	-59.52

Note: Margin value = Emission Level - Limit value

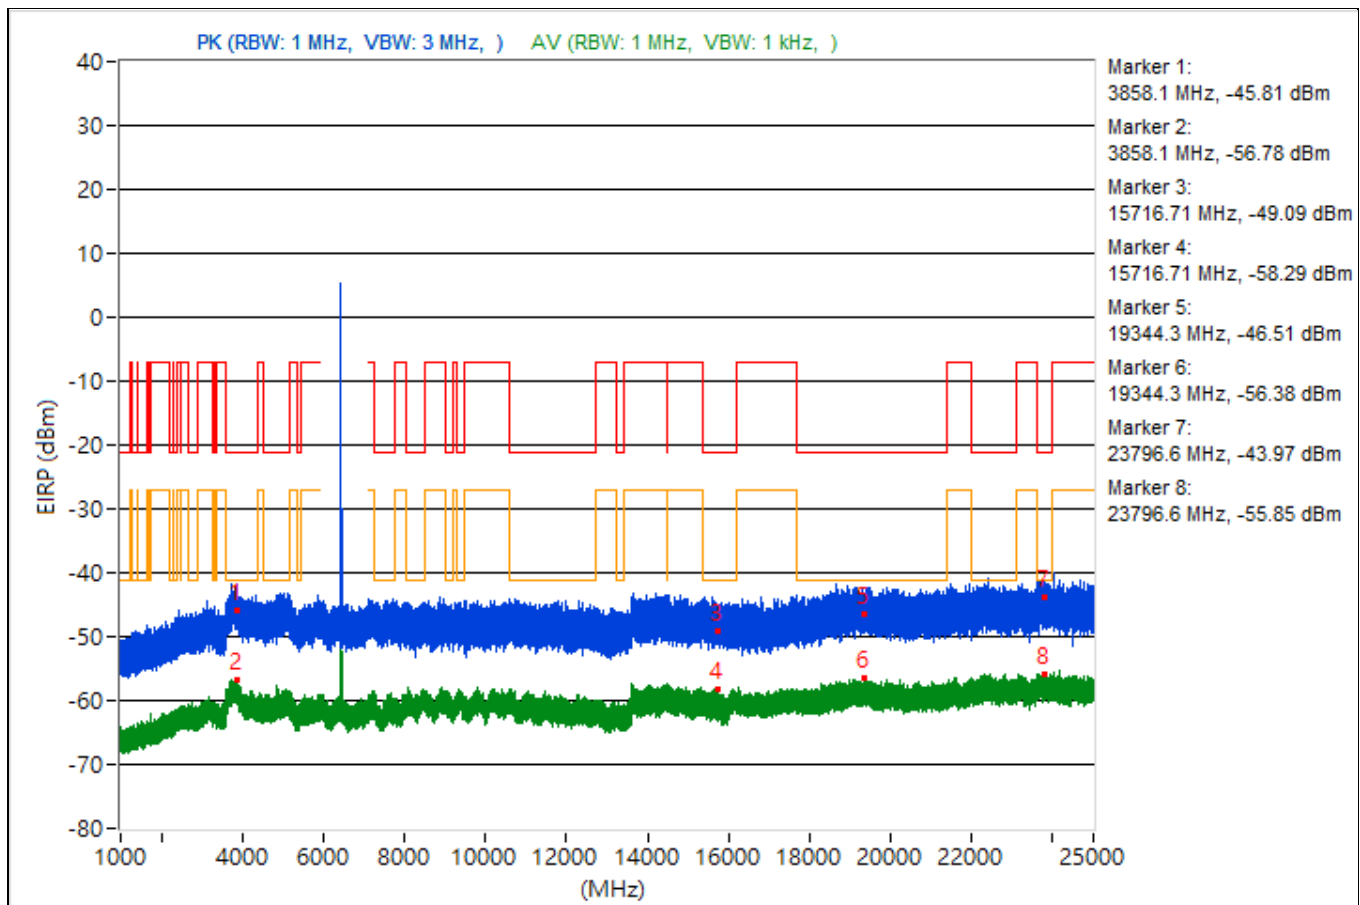


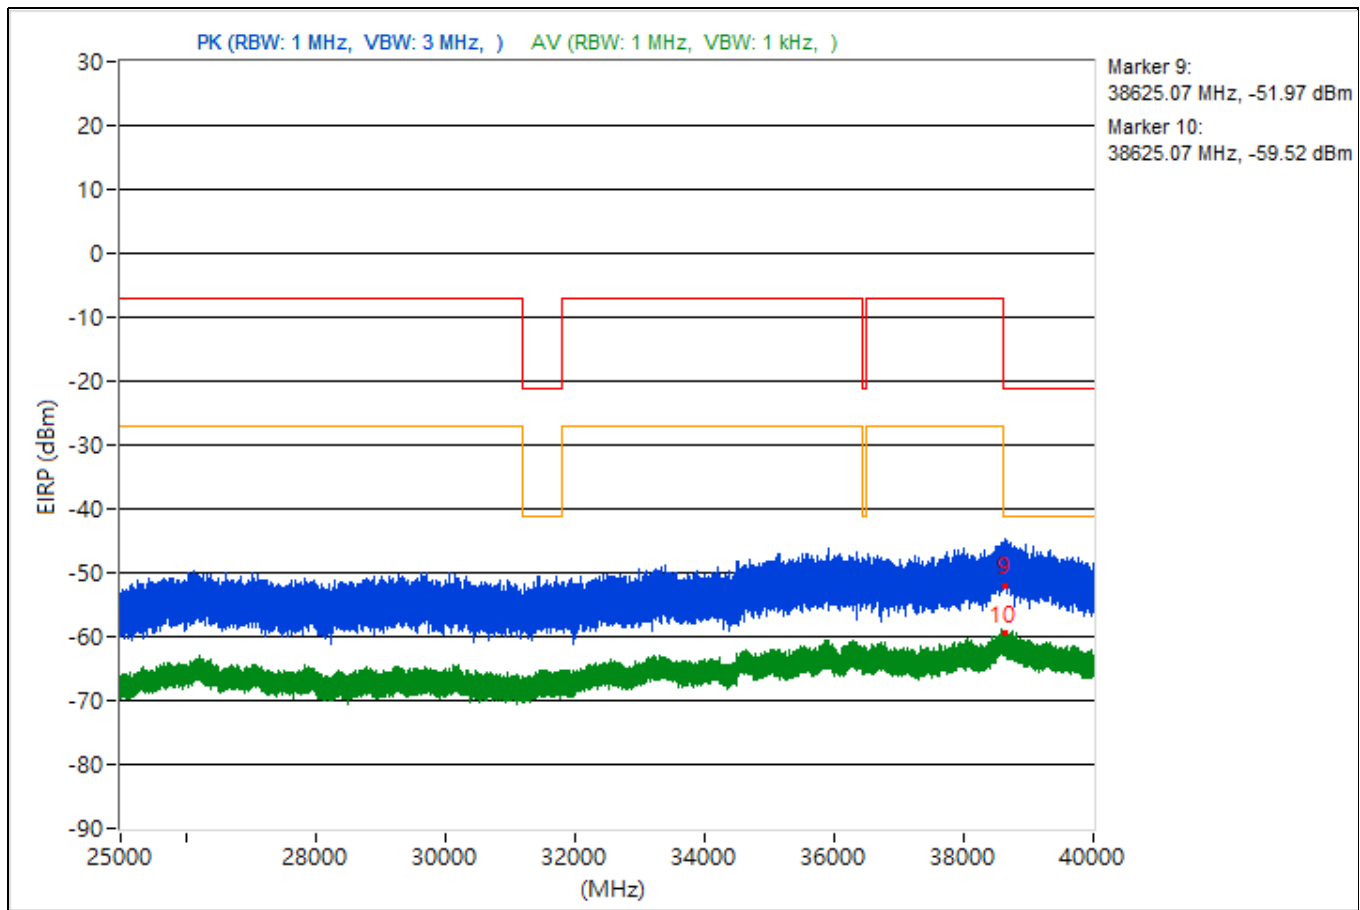


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3771.84	49.88 PK	74	-24.12	-52.98	-53.67	4.92	-45.38
2	3771.84	38.05 AV	54	-15.95	-66.61	-64.05	4.92	-57.21
3	14485.69	49.26 PK	74	-24.74	-55.4	-52.84	4.92	-46
4	14485.69	36.85 AV	54	-17.15	-64.98	-68.33	4.92	-58.41
5	19348.6	47.38 PK	74	-26.62	-56.77	-55.02	4.92	-47.88
6	19348.6	38.24 AV	54	-15.76	-67.6	-63.32	4.92	-57.02
7	23996.3	49.14 PK	74	-24.86	-52.84	-55.72	4.92	-46.12
8	23996.3	40.08 AV	54	-13.92	-64.07	-62.33	4.92	-55.18
9	38669.33	46.74 PK	74	-27.26	-54.65	-59.58	4.92	-48.52
10	38669.33	35.8 AV	54	-18.2	-69.08	-66.18	4.92	-59.46

Note: Margin value = Emission Level - Limit value

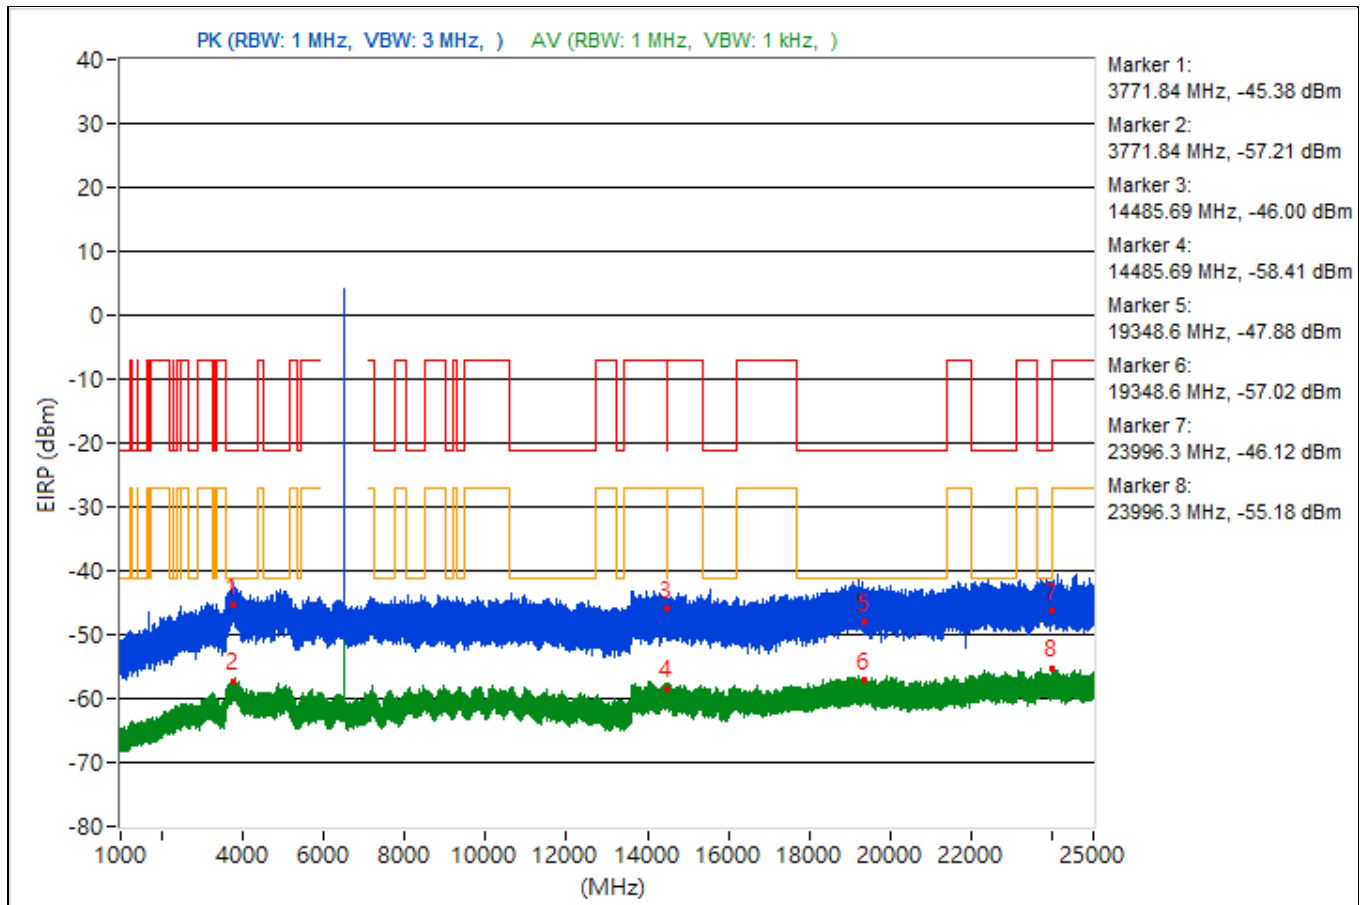


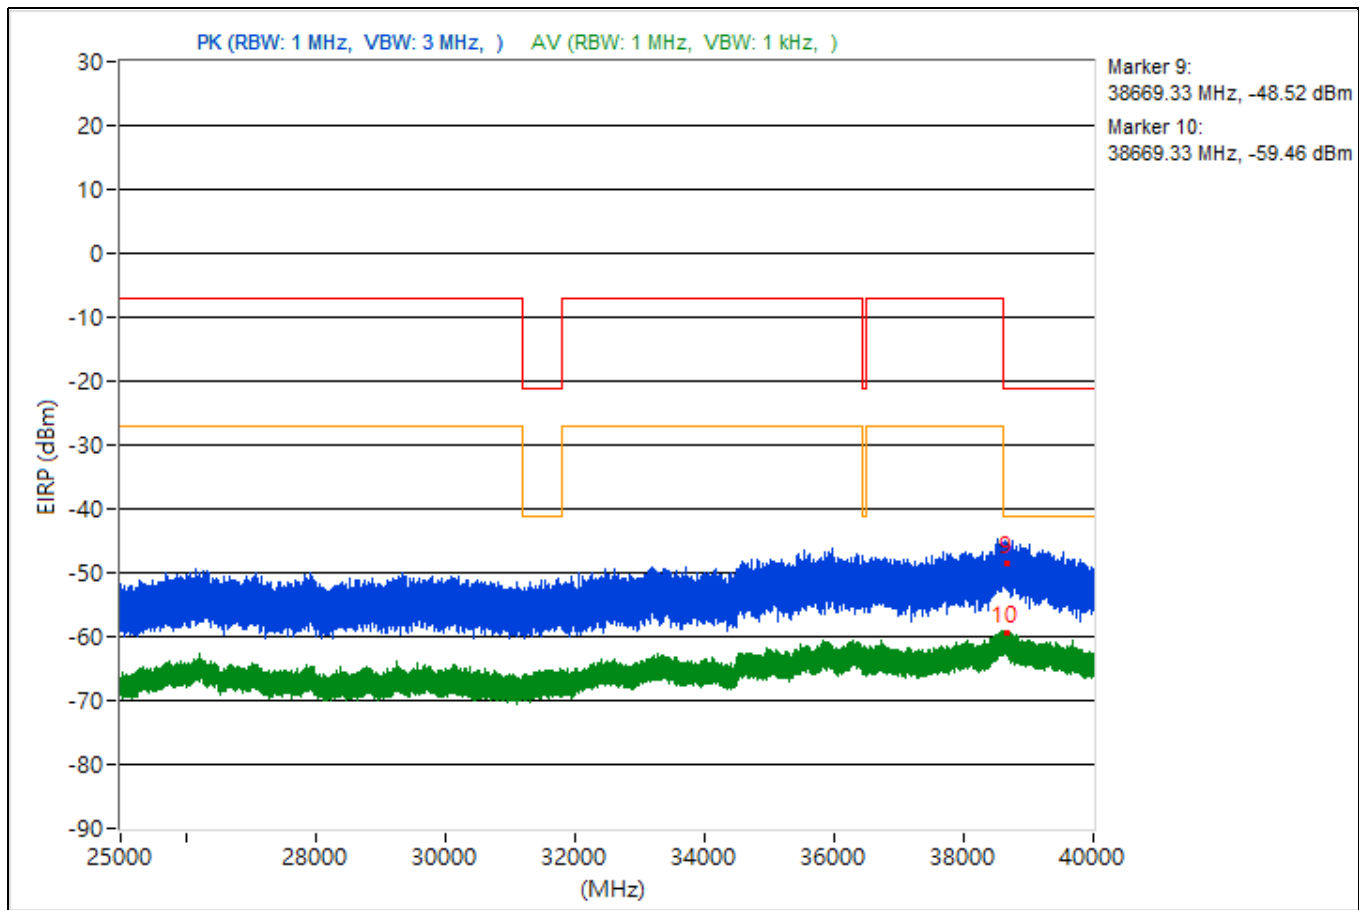


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3763.29	49.68 PK	74	-24.32	-55.47	-52.17	4.92	-45.58
2	3763.29	38.24 AV	54	-15.76	-63.92	-66.31	4.92	-57.02
3	14490.58	47.99 PK	74	-26.01	-53.68	-57.56	4.92	-47.27
4	14490.58	37.09 AV	54	-16.91	-65.27	-67.12	4.92	-58.17
5	18992	48.91 PK	74	-25.09	-53.07	-55.95	4.92	-46.35
6	18992	38.95 AV	54	-15.05	-63.4	-65.28	4.92	-56.31
7	23606.1	48.18 PK	74	-25.82	-55.59	-54.51	4.92	-47.08
8	23606.1	39.15 AV	54	-14.85	-66.04	-62.68	4.92	-56.11
9	38623.38	50.18 PK	74	-23.82	-54.86	-51.72	4.92	-45.08
10	38623.38	35.94 AV	54	-18.06	-68.7	-66.16	4.92	-59.32

Note: Margin value = Emission Level - Limit value

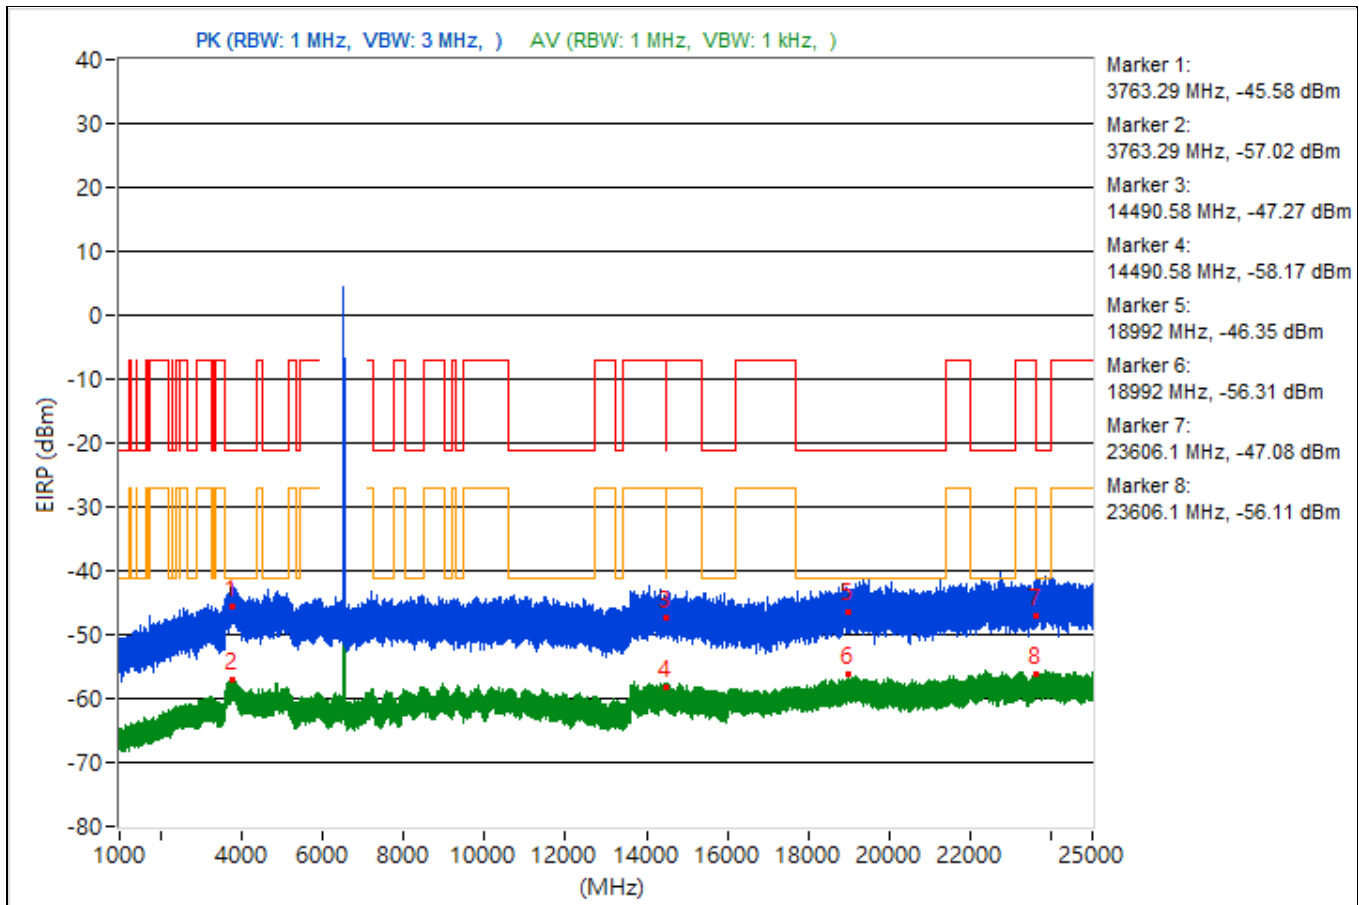


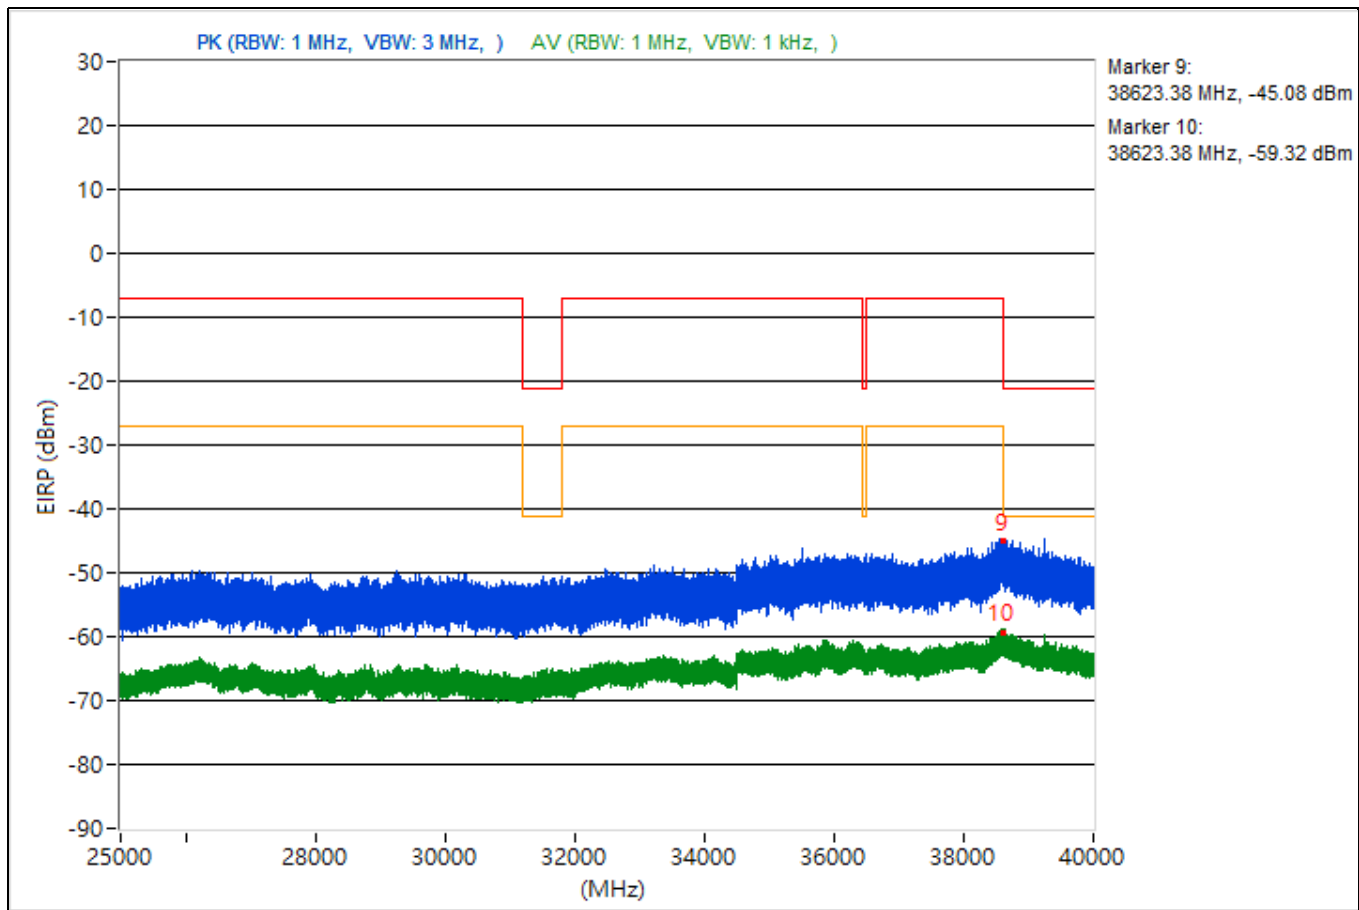


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3772	49.19 PK	74	-24.81	-52.59	-56.11	4.92	-46.07
2	3772	38.37 AV	54	-15.63	-66.4	-63.67	4.92	-56.89
3	10636.36	48.08 PK	74	-25.92	-54.71	-55.55	4.92	-47.18
4	10636.36	36.98 AV	54	-17.02	-67.84	-65.03	4.92	-58.28
5	19380.2	49.4 PK	74	-24.6	-53.42	-54.19	4.92	-45.86
6	19380.2	38.87 AV	54	-15.13	-63.12	-65.98	4.92	-56.39
7	22411.5	50.08 PK	74	-23.92	-52.87	-53.36	4.92	-45.18
8	22411.5	39.34 AV	54	-14.66	-62.53	-65.77	4.92	-55.92
9	38636	47.46 PK	74	-26.54	-56.48	-55.09	4.92	-47.8
10	38636	37.29 AV	54	-16.71	-66.05	-65.75	4.92	-57.97

Note: Margin value = Emission Level - Limit value

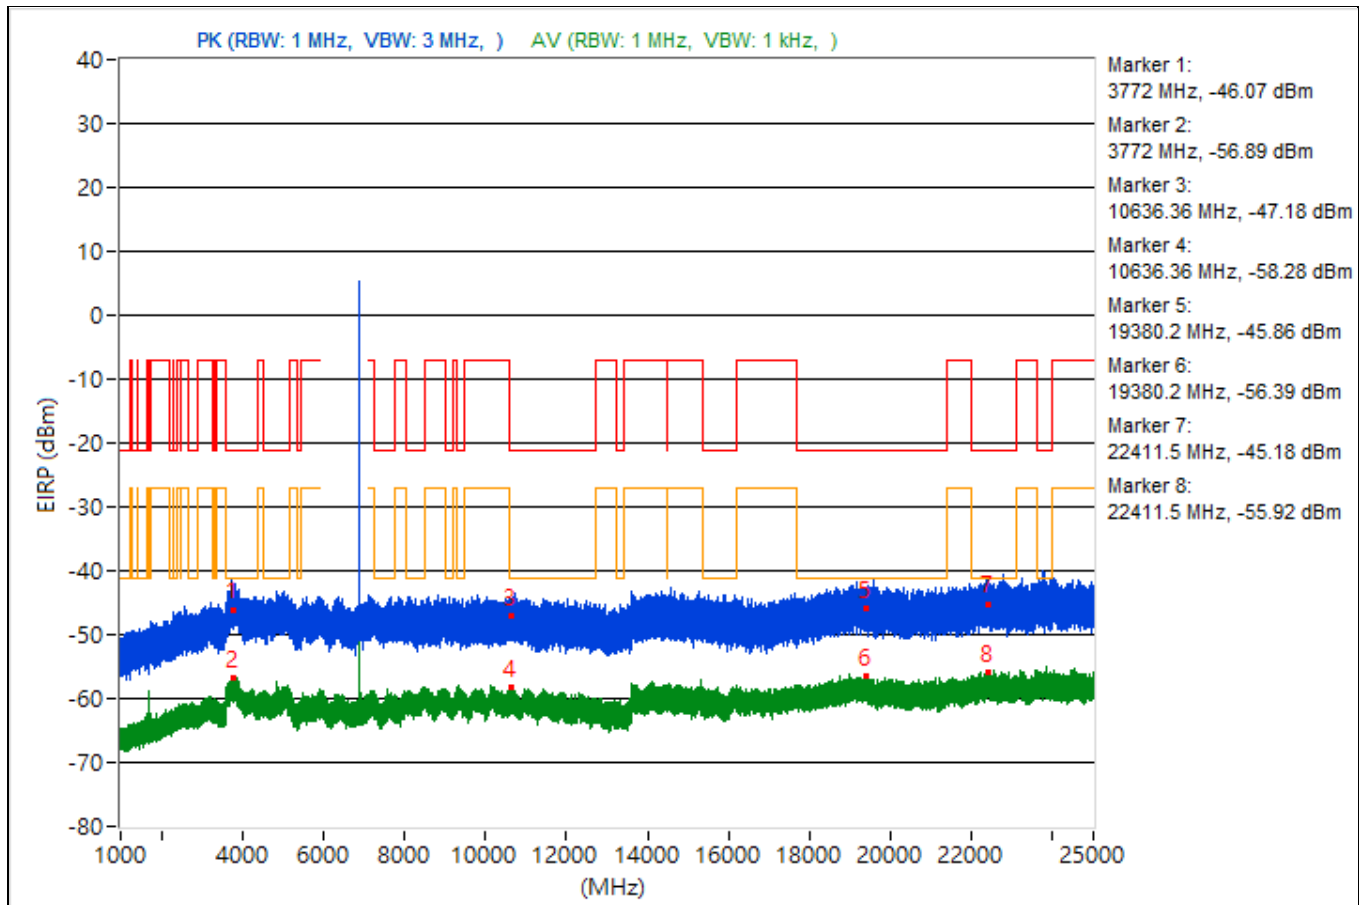


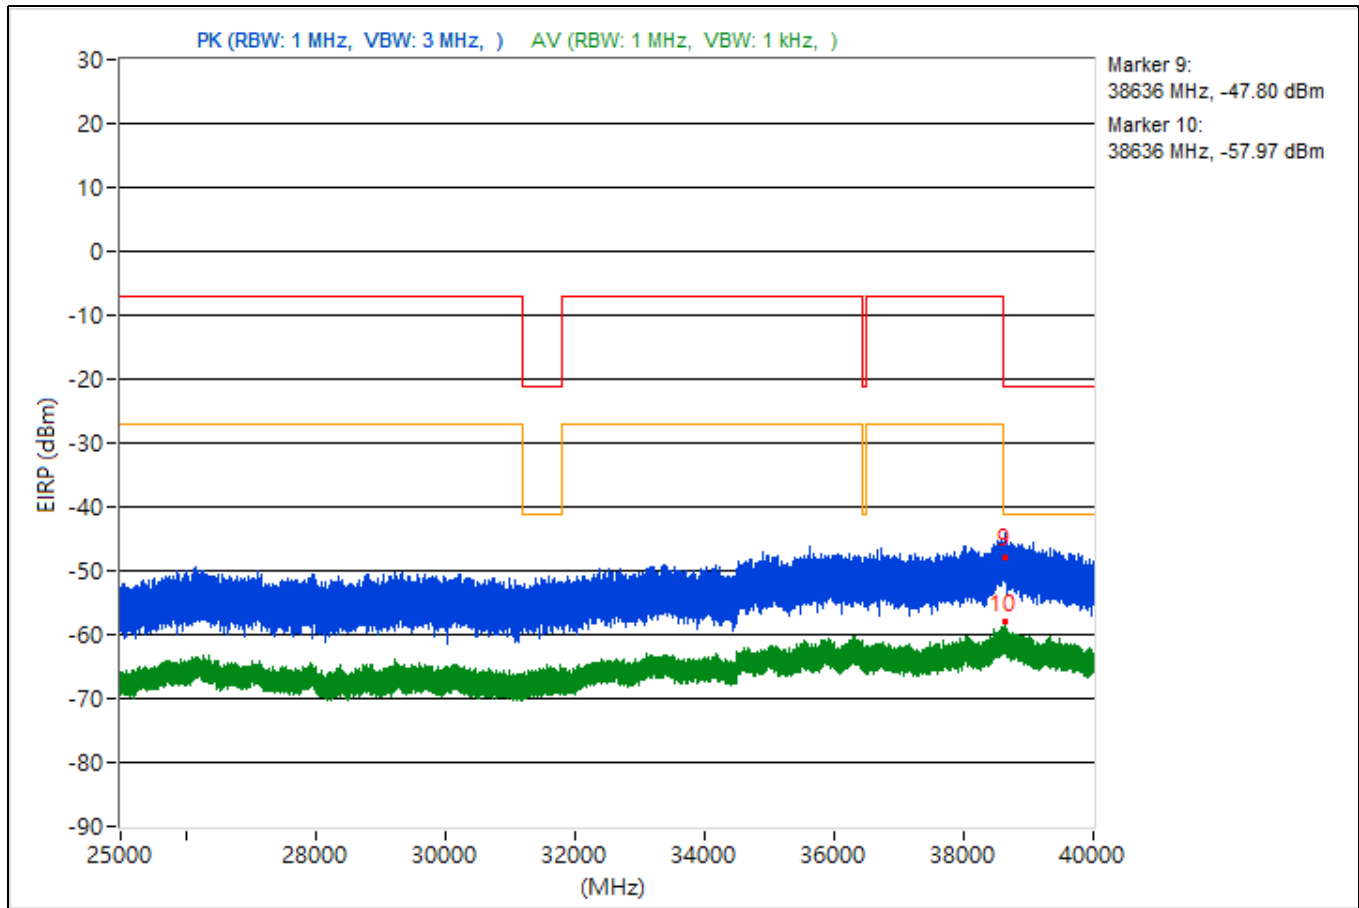


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3789.58	49.08 PK	74	-24.92	-55.92	-52.84	4.92	-46.18
2	3789.58	38.24 AV	54	-15.76	-65.95	-64.14	4.92	-57.02
3	9331.73	47.32 PK	74	-26.68	-56.67	-55.2	4.92	-47.94
4	9331.73	37.62 AV	54	-16.38	-66.22	-65	4.92	-57.64
5	19235.7	49.56 PK	74	-24.44	-53.75	-53.52	4.92	-45.7
6	19235.7	38.58 AV	54	-15.42	-67.92	-62.75	4.92	-56.68
7	23950.3	49.57 PK	74	-24.43	-55.37	-52.38	4.92	-45.69
8	23950.3	39.97 AV	54	-14.03	-61.99	-64.94	4.92	-55.29
9	38625.42	47.95 PK	74	-26.05	-55.87	-54.68	4.92	-47.31
10	38625.42	36.05 AV	54	-17.95	-69.2	-65.75	4.92	-59.21

Note: Margin value = Emission Level - Limit value

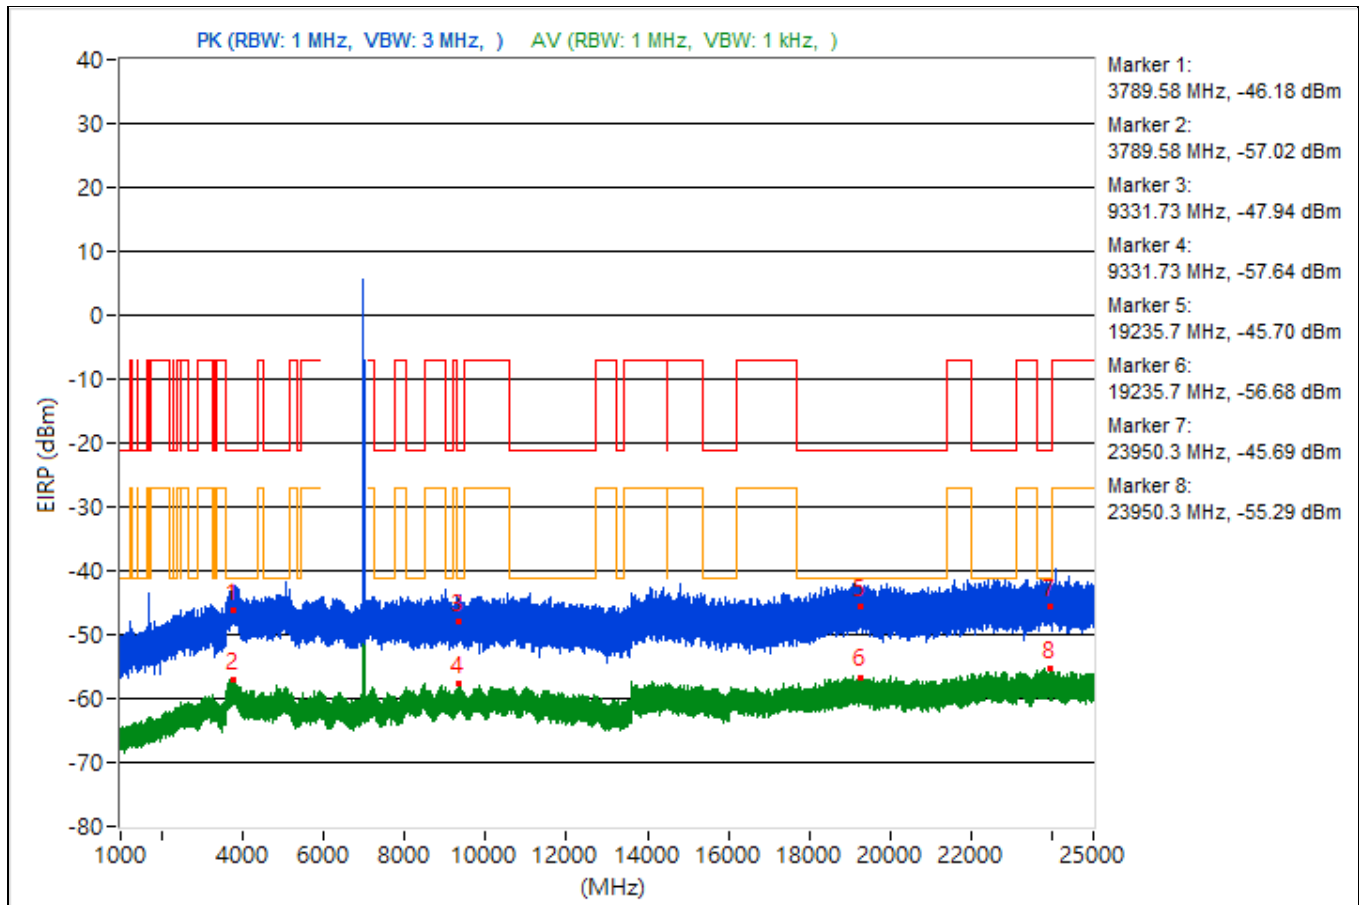


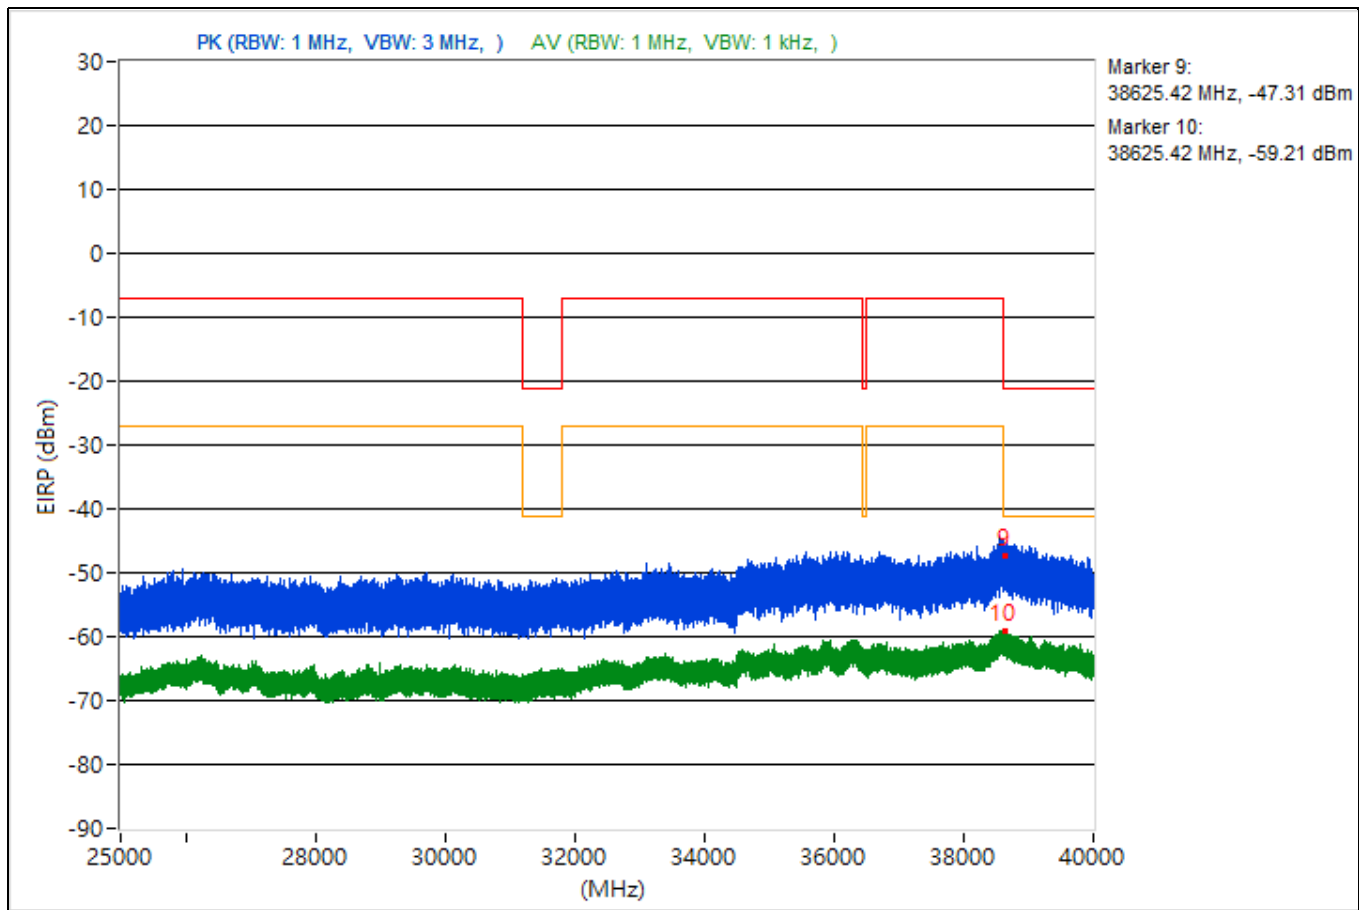


RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3792.92	50.96 PK	74	-23.04	-51.43	-53.21	4.92	-44.3
2	3792.92	38.92 AV	54	-15.08	-66.75	-62.7	4.92	-56.34
3	14473.33	44.79 PK	74	-29.21	-58.3	-58.51	4.92	-50.47
4	14473.33	37.11 AV	54	-16.89	-64.75	-68	4.92	-58.15
5	19111.3	50.4 PK	74	-23.6	-52.88	-52.7	4.92	-44.86
6	19111.3	38.67 AV	54	-15.33	-66.85	-63.01	4.92	-56.59
7	23658.3	50.88 PK	74	-23.12	-54.68	-50.79	4.92	-44.38
8	23658.3	39.57 AV	54	-14.43	-64.71	-62.75	4.92	-55.69
9	38610.67	49 PK	74	-25	-52.83	-56.18	4.92	-46.26
10	38610.67	36.1 AV	54	-17.9	-68.3	-66.15	4.92	-59.16

Note: Margin value = Emission Level - Limit value

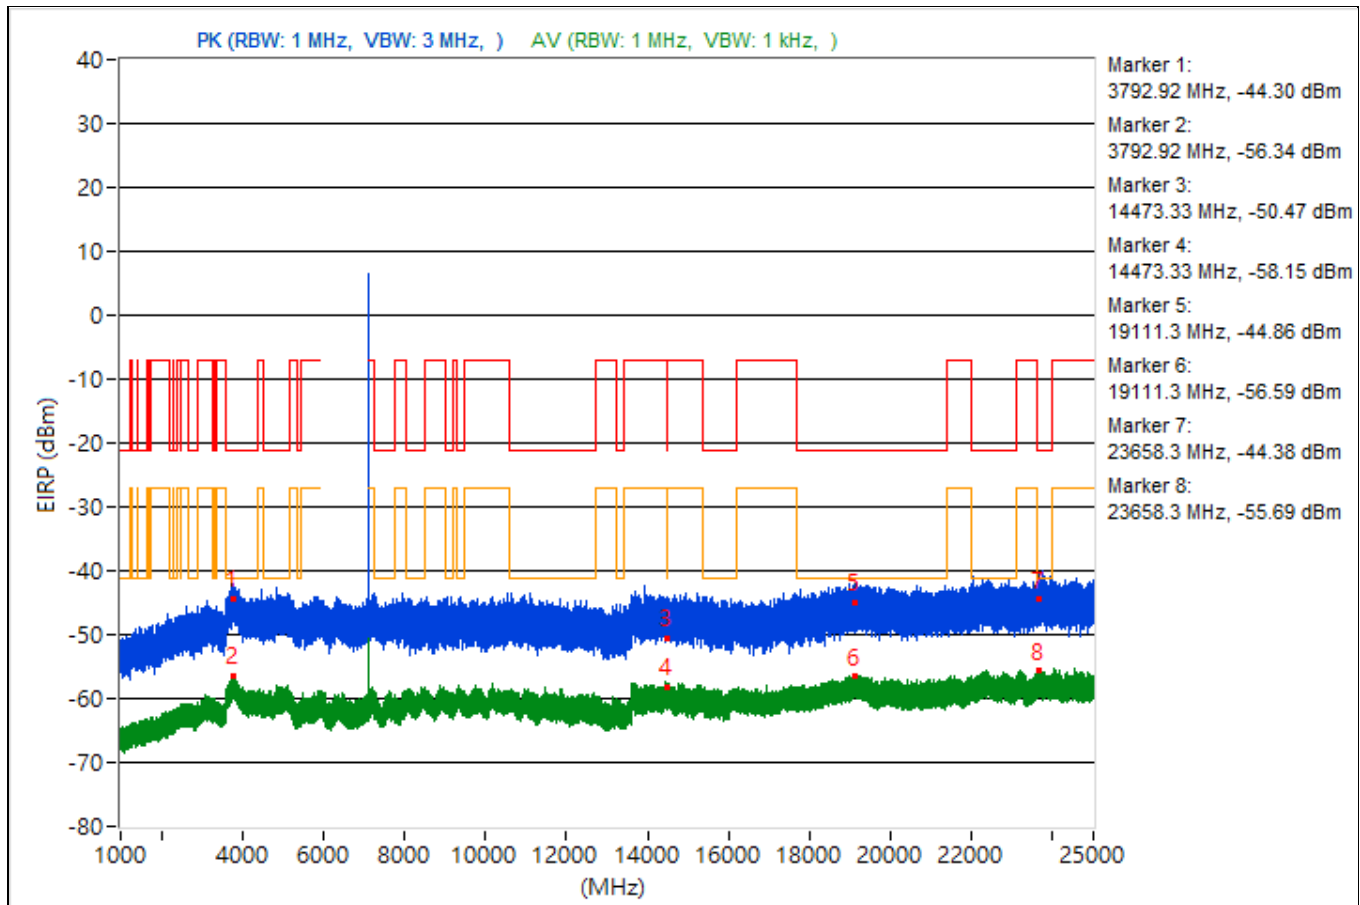


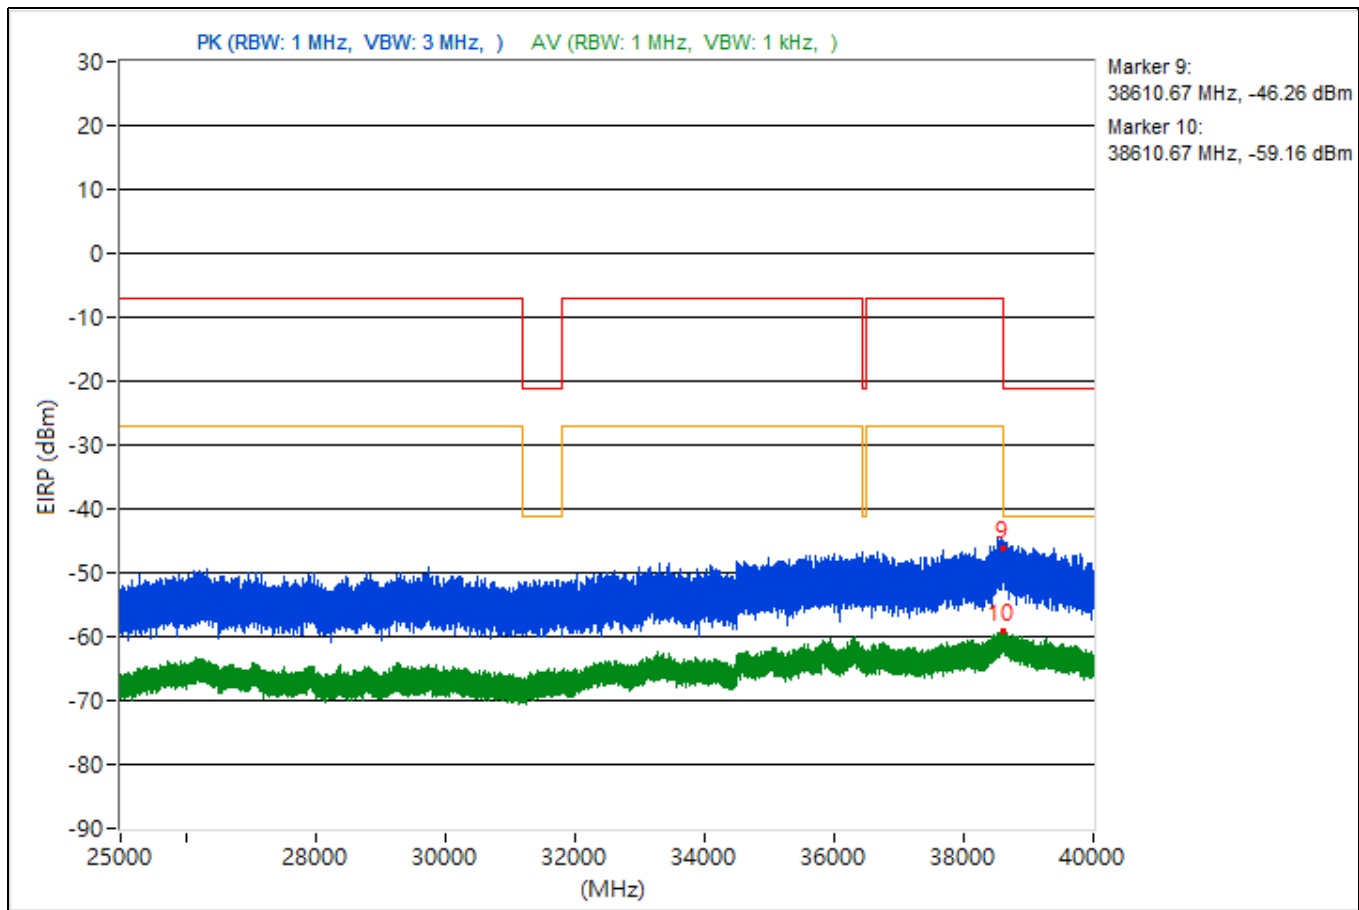


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3746.02	50.07 PK	74	-23.93	-54.66	-51.99	4.92	-45.19
2	3746.02	38.65 AV	54	-15.35	-65.17	-63.99	4.92	-56.61
3	14476.36	49.29 PK	74	-24.71	-53.12	-54.86	4.92	-45.97
4	14476.36	37.04 AV	54	-16.96	-65.42	-67.03	4.92	-58.22
5	19504.6	49.55 PK	74	-24.45	-53.28	-54.03	4.92	-45.71
6	19504.6	38.88 AV	54	-15.12	-66.26	-62.97	4.92	-56.38
7	23838.2	50.67 PK	74	-23.33	-52.85	-52.21	4.92	-44.59
8	23838.2	39.24 AV	54	-14.76	-65.96	-62.58	4.92	-56.02
9	38644	46.4 PK	74	-27.6	-57.73	-56.01	4.92	-48.86
10	38644	36.05 AV	54	-17.95	-68.57	-66.07	4.92	-59.21

Note: Margin value = Emission Level - Limit value

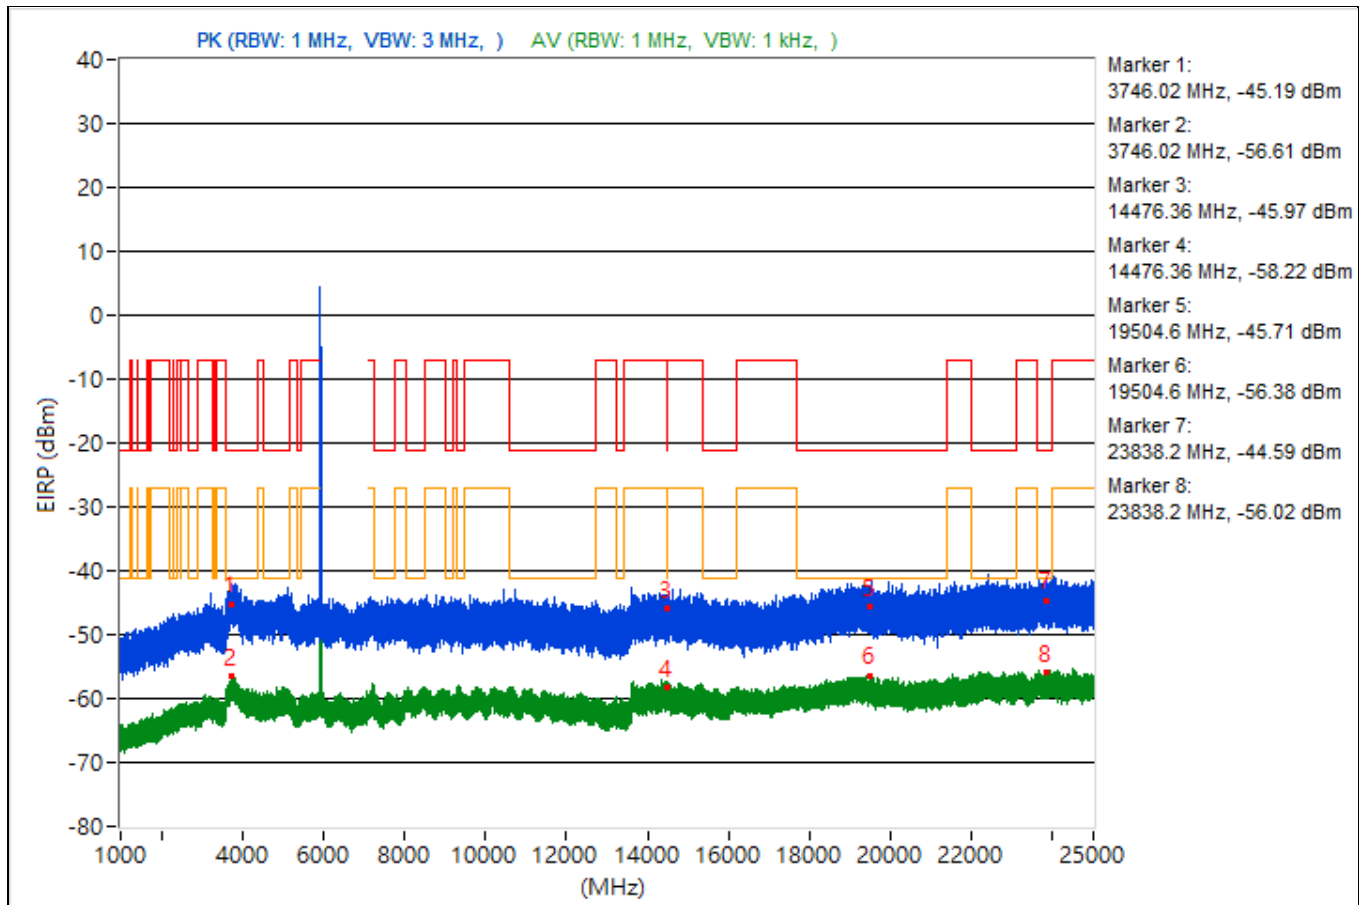


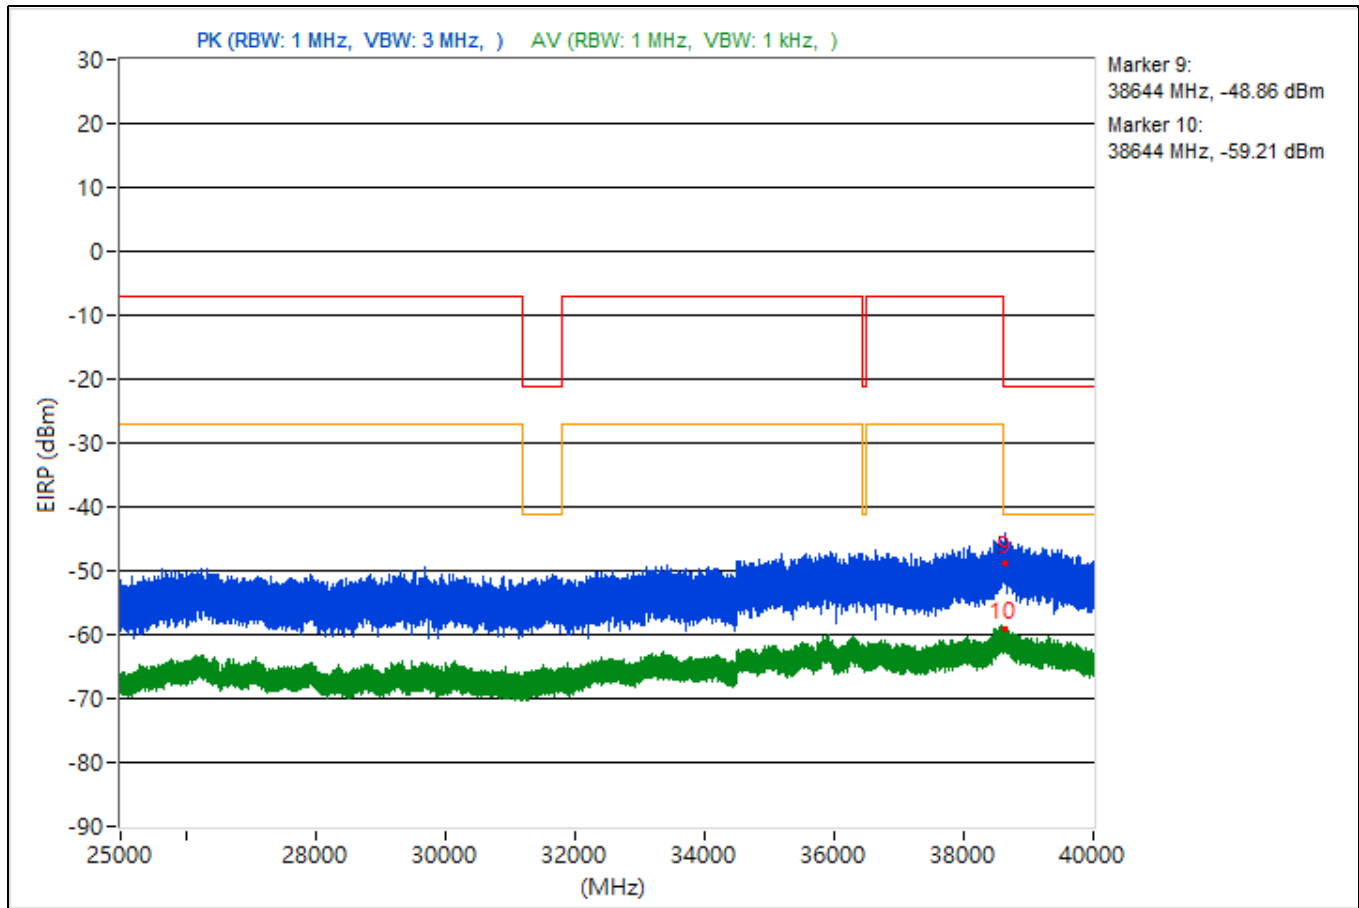


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3766.87	49.21 PK	74	-24.79	-53.32	-54.75	4.92	-46.05
2	3766.87	38.47 AV	54	-15.53	-65.91	-63.78	4.92	-56.79
3	14486.22	46.55 PK	74	-27.45	-55.07	-59.14	4.92	-48.71
4	14486.22	37.13 AV	54	-16.87	-64.75	-67.96	4.92	-58.13
5	18933.5	50.56 PK	74	-23.44	-52.94	-52.35	4.92	-44.7
6	18933.5	38.41 AV	54	-15.59	-67.06	-63.29	4.92	-56.85
7	22814.9	50.82 PK	74	-23.18	-55.34	-50.62	4.92	-44.44
8	22814.9	39.56 AV	54	-14.44	-64.98	-62.6	4.92	-55.7
9	38645.87	46.77 PK	74	-27.23	-60.38	-54.38	4.92	-48.49
10	38645.87	35.84 AV	54	-18.16	-65.64	-70.21	4.92	-59.42

Note: Margin value = Emission Level - Limit value

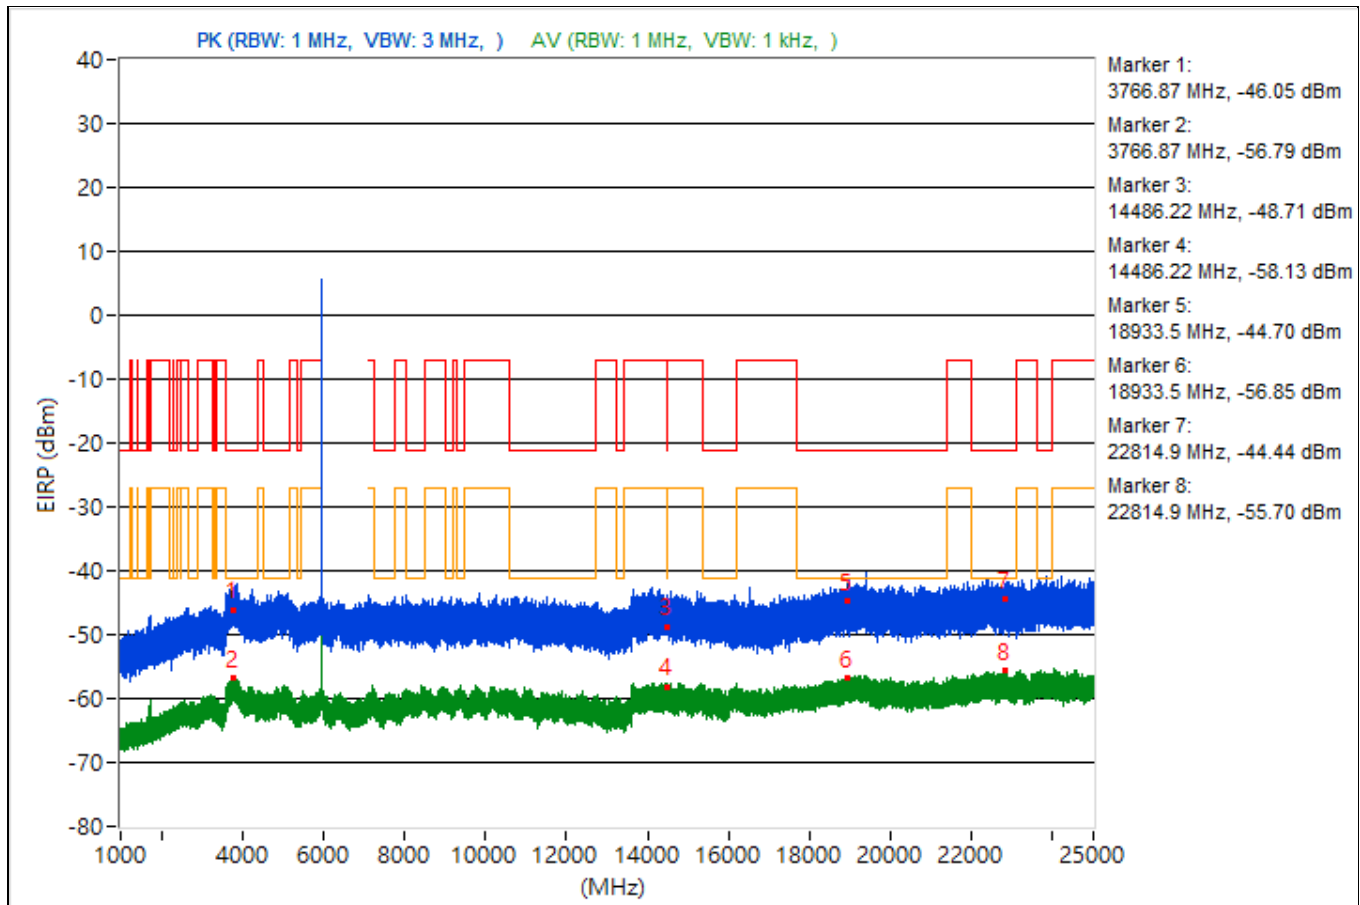


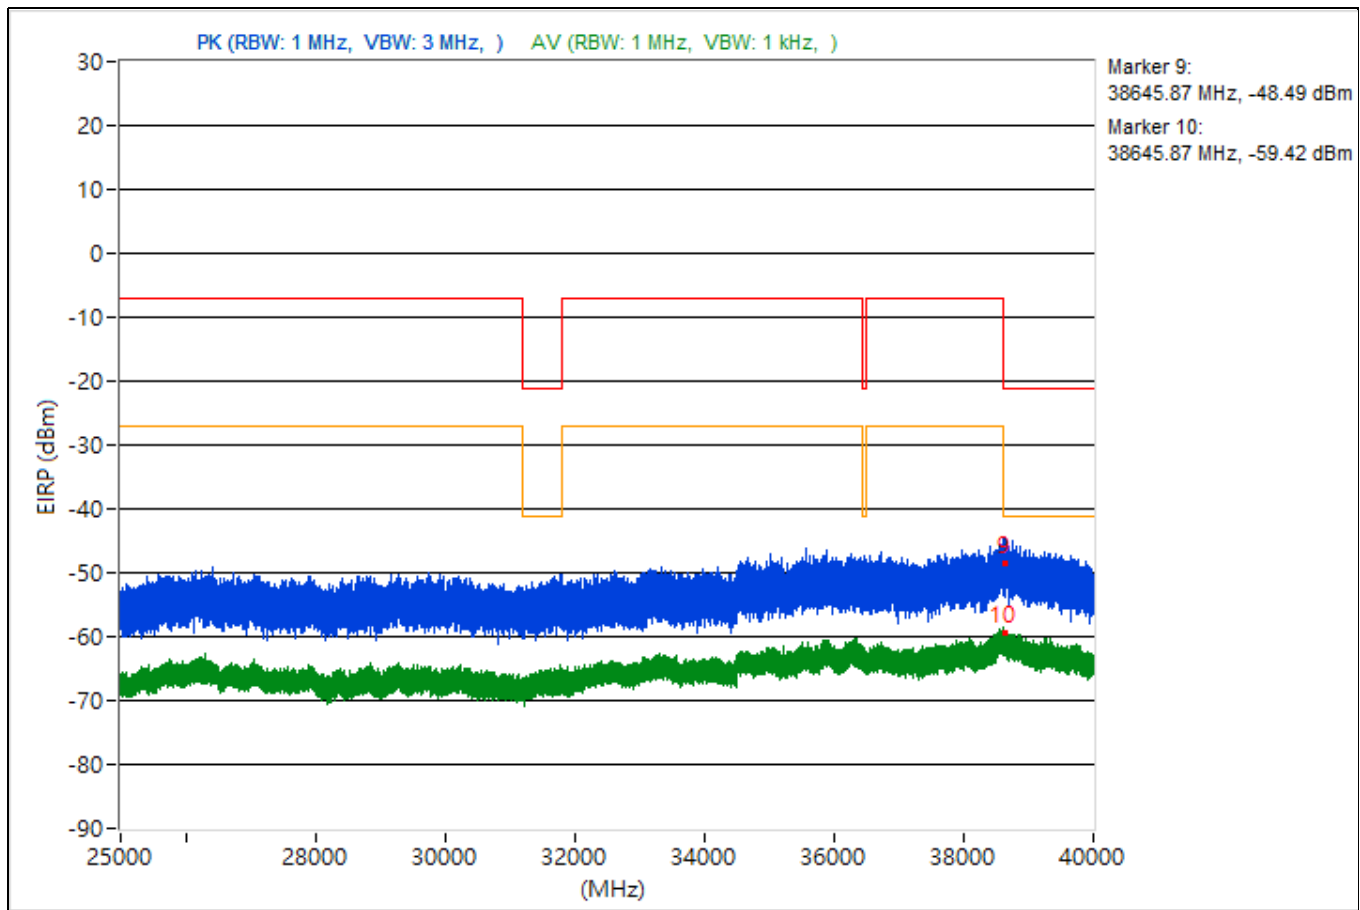


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3718.26	50.17 PK	74	-23.83	-52.84	-53.21	4.92	-45.09
2	3718.26	37.9 AV	54	-16.1	-66.59	-64.29	4.92	-57.36
3	14485.07	47.21 PK	74	-26.79	-58.11	-54.55	4.92	-48.05
4	14485.07	37.29 AV	54	-16.71	-67.33	-64.83	4.92	-57.97
5	18960.6	49.06 PK	74	-24.94	-55.12	-53.32	4.92	-46.2
6	18960.6	39.42 AV	54	-14.58	-63.35	-64.23	4.92	-55.84
7	22821.9	48.82 PK	74	-25.18	-55.12	-53.73	4.92	-46.44
8	22821.9	39.94 AV	54	-14.06	-65.19	-61.92	4.92	-55.32
9	38609.69	43.84 PK	74	-30.16	-58.76	-60.02	4.92	-51.42
10	38609.69	36.15 AV	54	-17.85	-68.58	-65.9	4.92	-59.11

Note: Margin value = Emission Level - Limit value

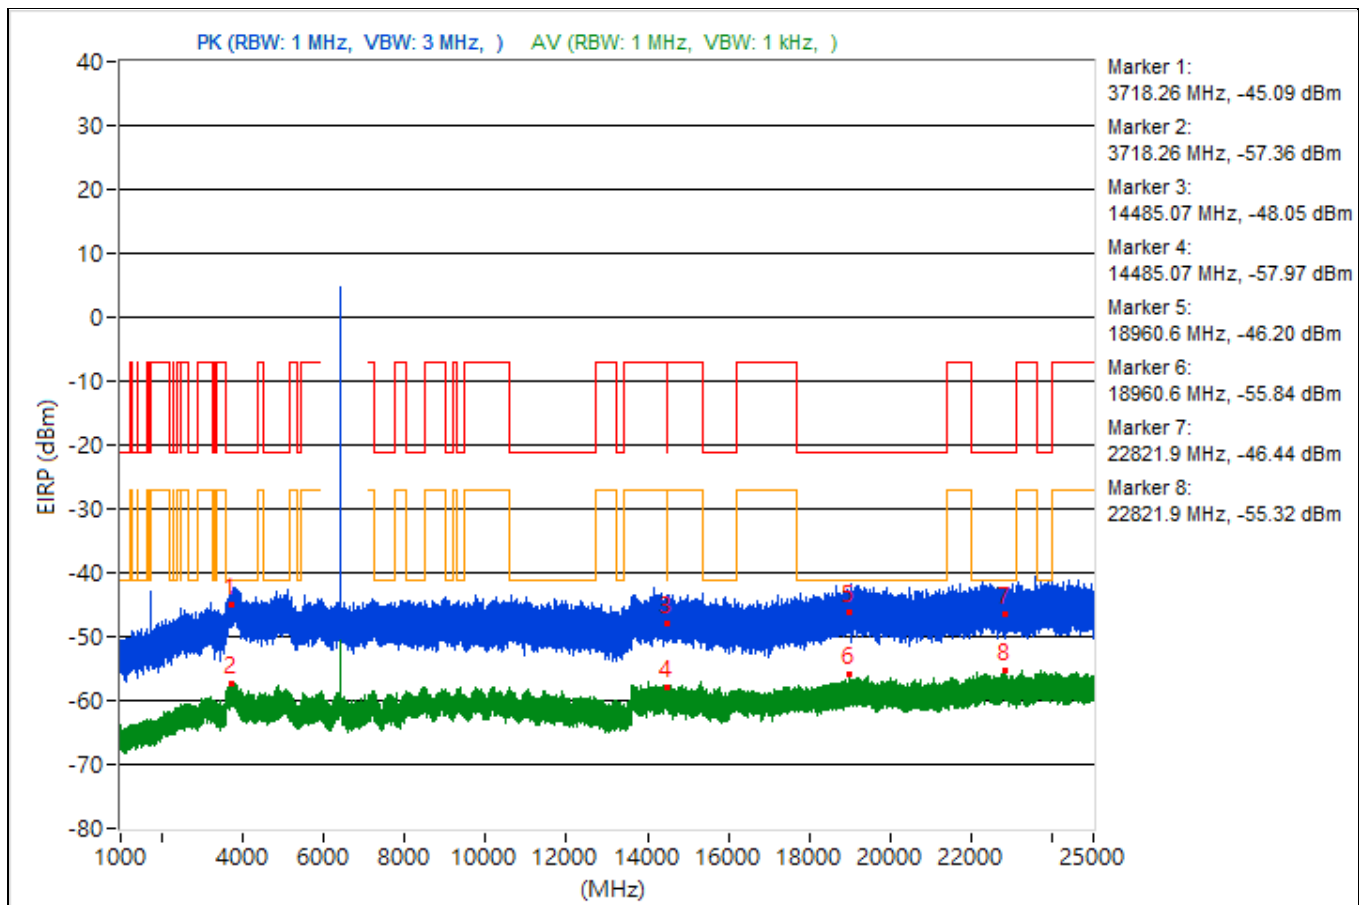


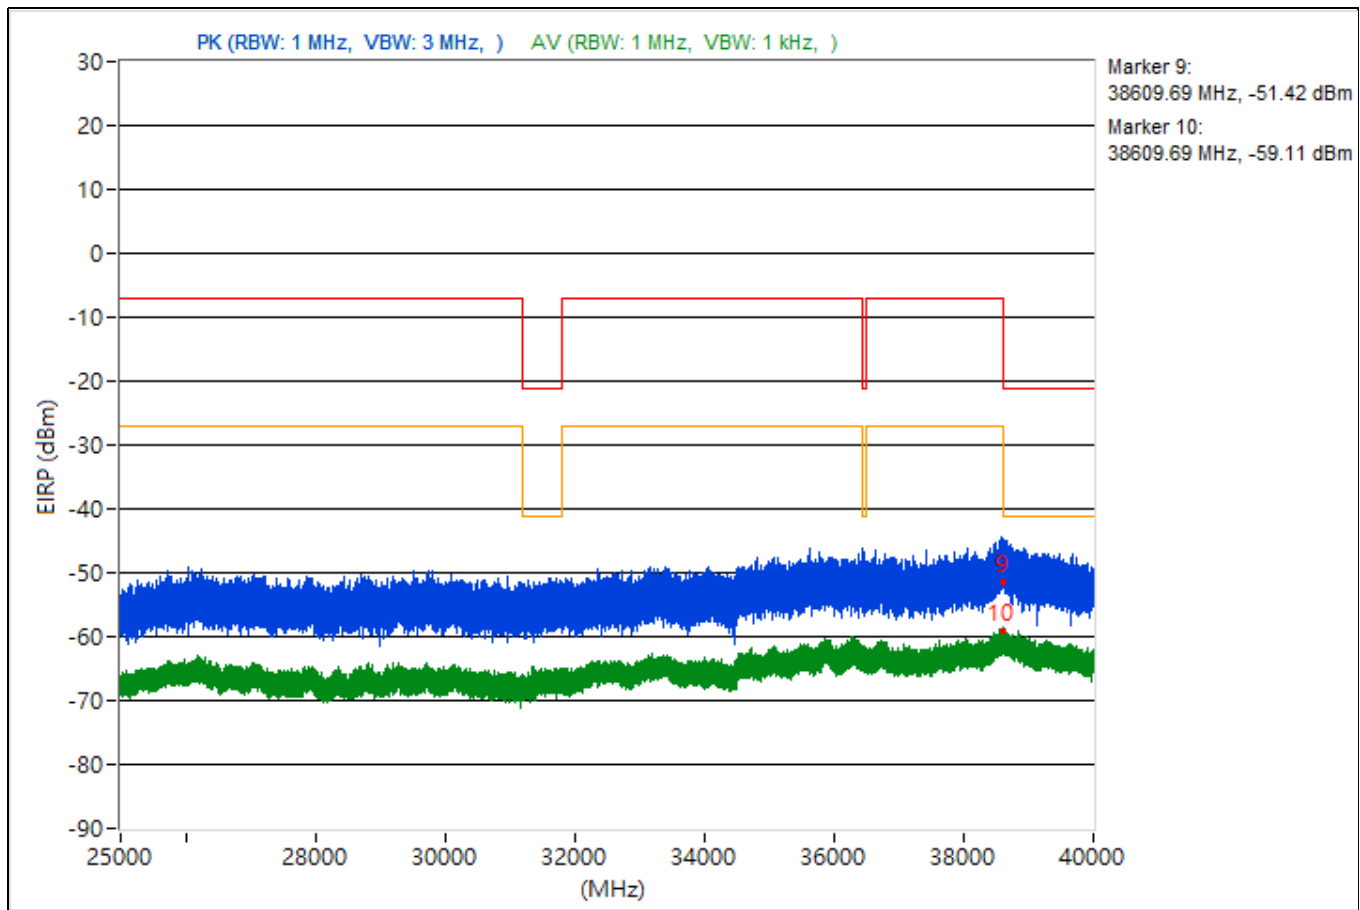


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3743.14	51.29 PK	74	-22.71	-51.5	-52.34	4.92	-43.97
2	3743.14	38.92 AV	54	-15.08	-65.44	-63.34	4.92	-56.34
3	14481.42	49.72 PK	74	-24.28	-52.87	-54.16	4.92	-45.54
4	14481.42	37.43 AV	54	-16.57	-64.87	-66.88	4.92	-57.83
5	19036.5	47.46 PK	74	-26.54	-55.2	-56.33	4.92	-47.8
6	19036.5	38.8 AV	54	-15.2	-66.81	-62.85	4.92	-56.46
7	22332.4	51.01 PK	74	-22.99	-50.72	-54.41	4.92	-44.25
8	22332.4	39.48 AV	54	-14.52	-65.66	-62.37	4.92	-55.78
9	38627.64	47.07 PK	74	-26.93	-57.62	-55.01	4.92	-48.19
10	38627.64	36.37 AV	54	-17.63	-67.98	-65.9	4.92	-58.89

Note: Margin value = Emission Level - Limit value

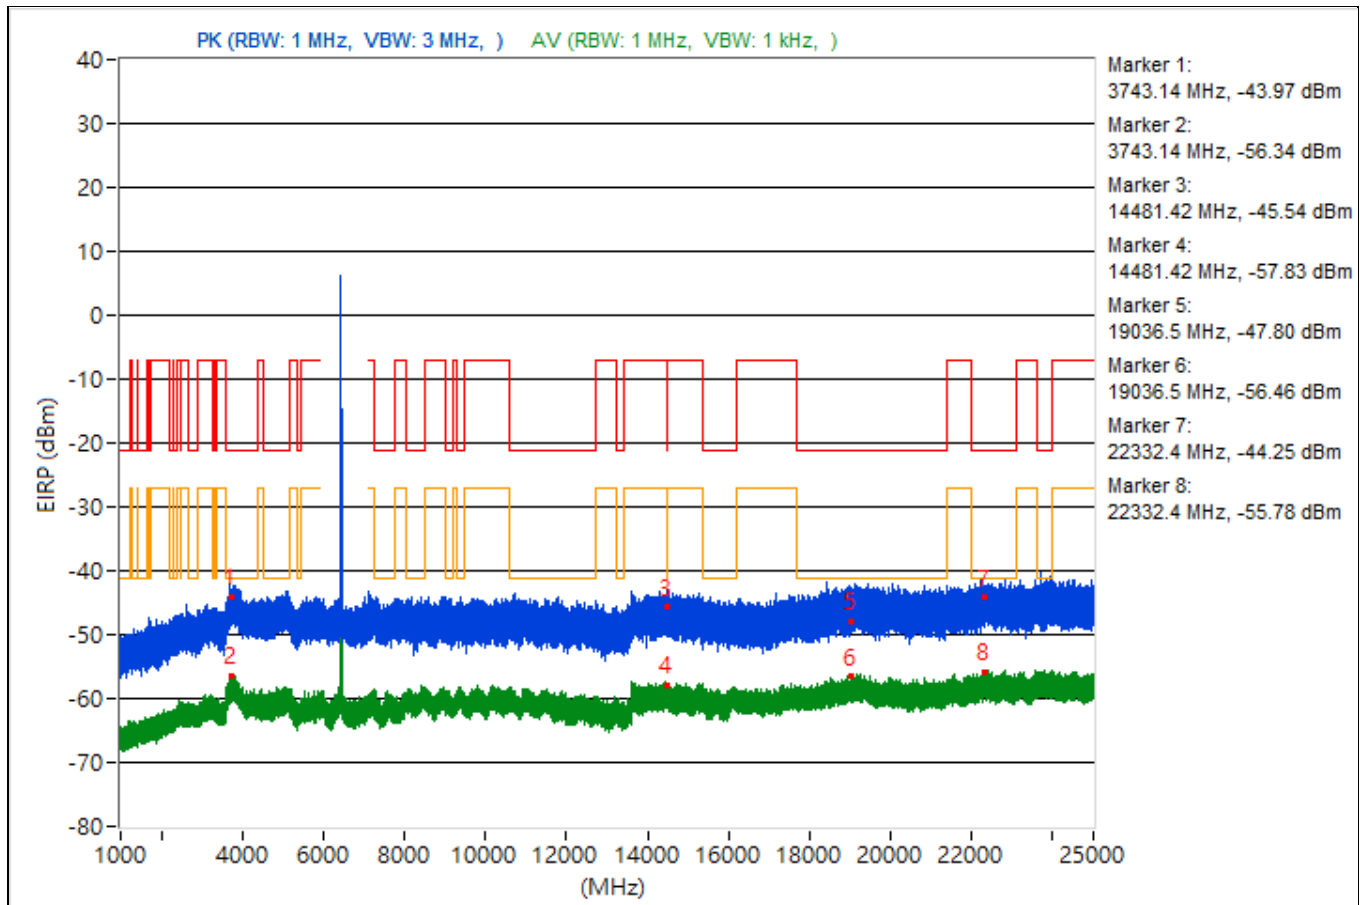


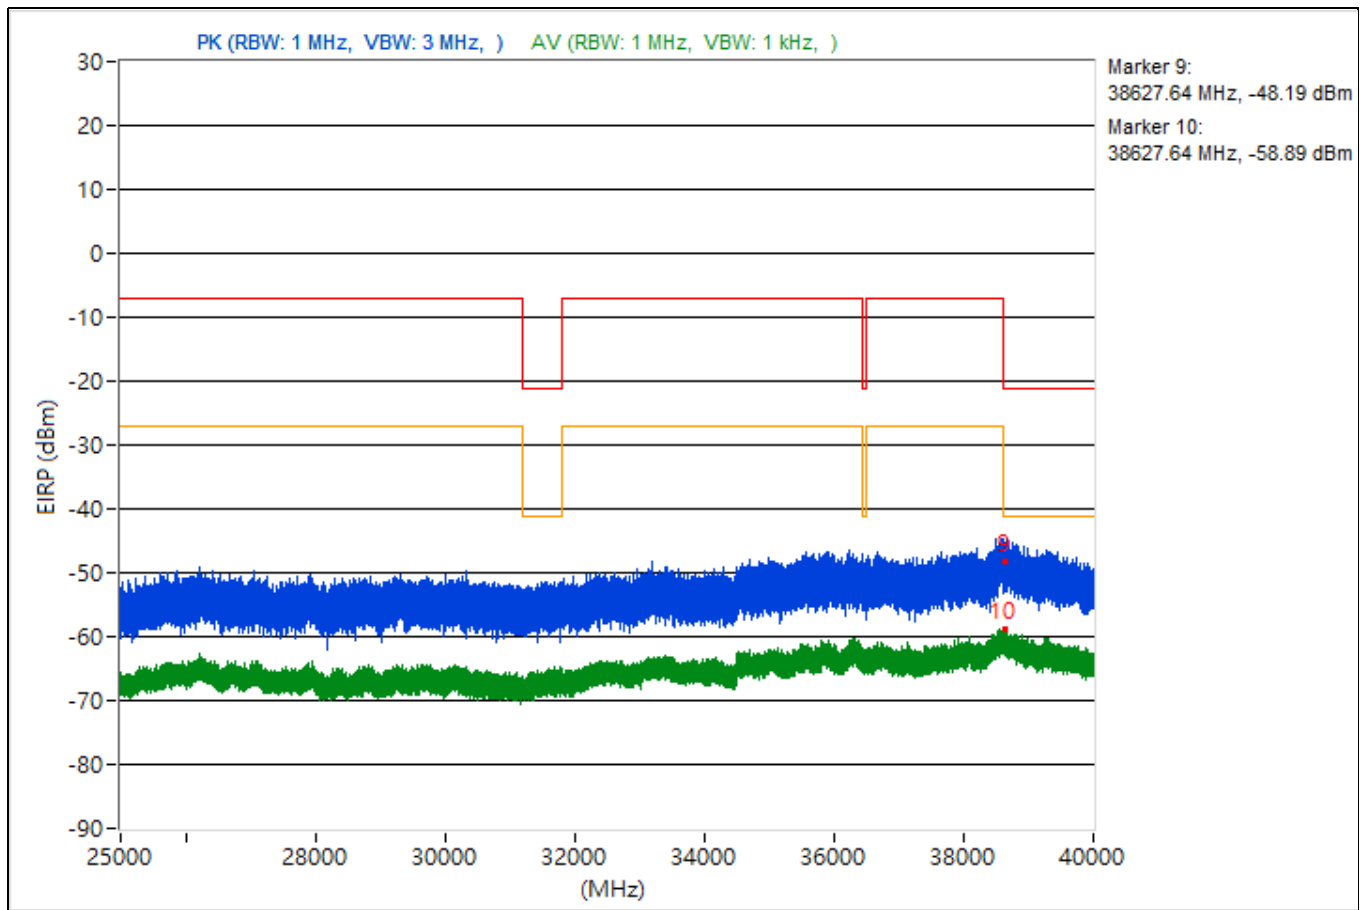


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.37	51.46 PK	74	-22.54	-50.83	-52.87	4.92	-43.8
2	3798.37	38.5 AV	54	-15.5	-63.64	-66.08	4.92	-56.76
3	14486.67	47.55 PK	74	-26.45	-54.12	-57.99	4.92	-47.71
4	14486.67	37.04 AV	54	-16.96	-67.93	-64.9	4.92	-58.22
5	19198.7	51.4 PK	74	-22.6	-51.67	-51.9	4.92	-43.86
6	19198.7	38.91 AV	54	-15.09	-65.73	-63.2	4.92	-56.35
7	23652.1	50.37 PK	74	-23.63	-52.53	-53.13	4.92	-44.89
8	23652.1	40.02 AV	54	-13.98	-62.56	-63.87	4.92	-55.24
9	38609.33	47.68 PK	74	-26.32	-55.37	-55.66	4.92	-47.58
10	38609.33	36.09 AV	54	-17.91	-68.75	-65.91	4.92	-59.17

Note: Margin value = Emission Level - Limit value

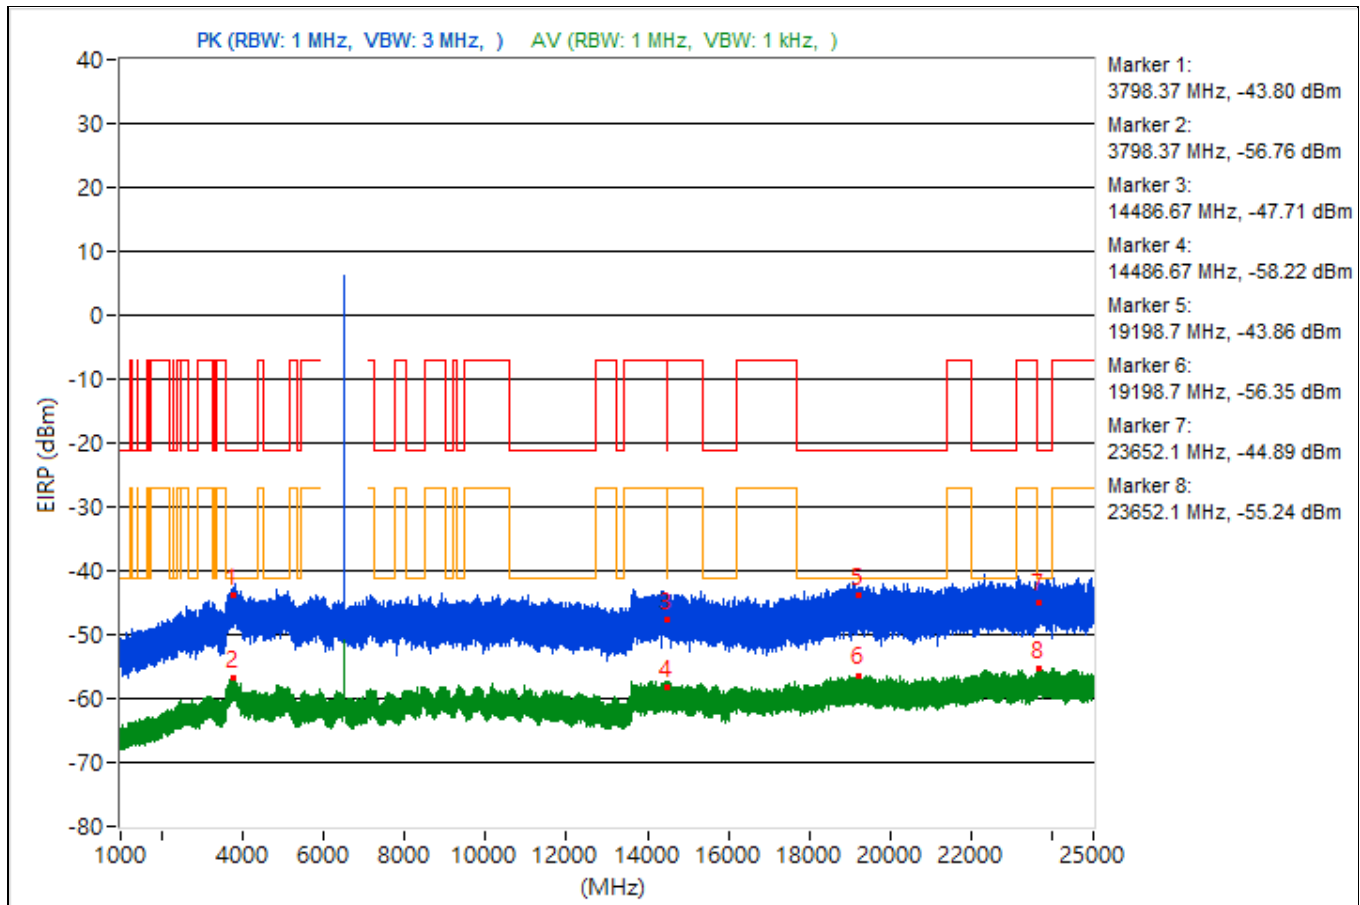


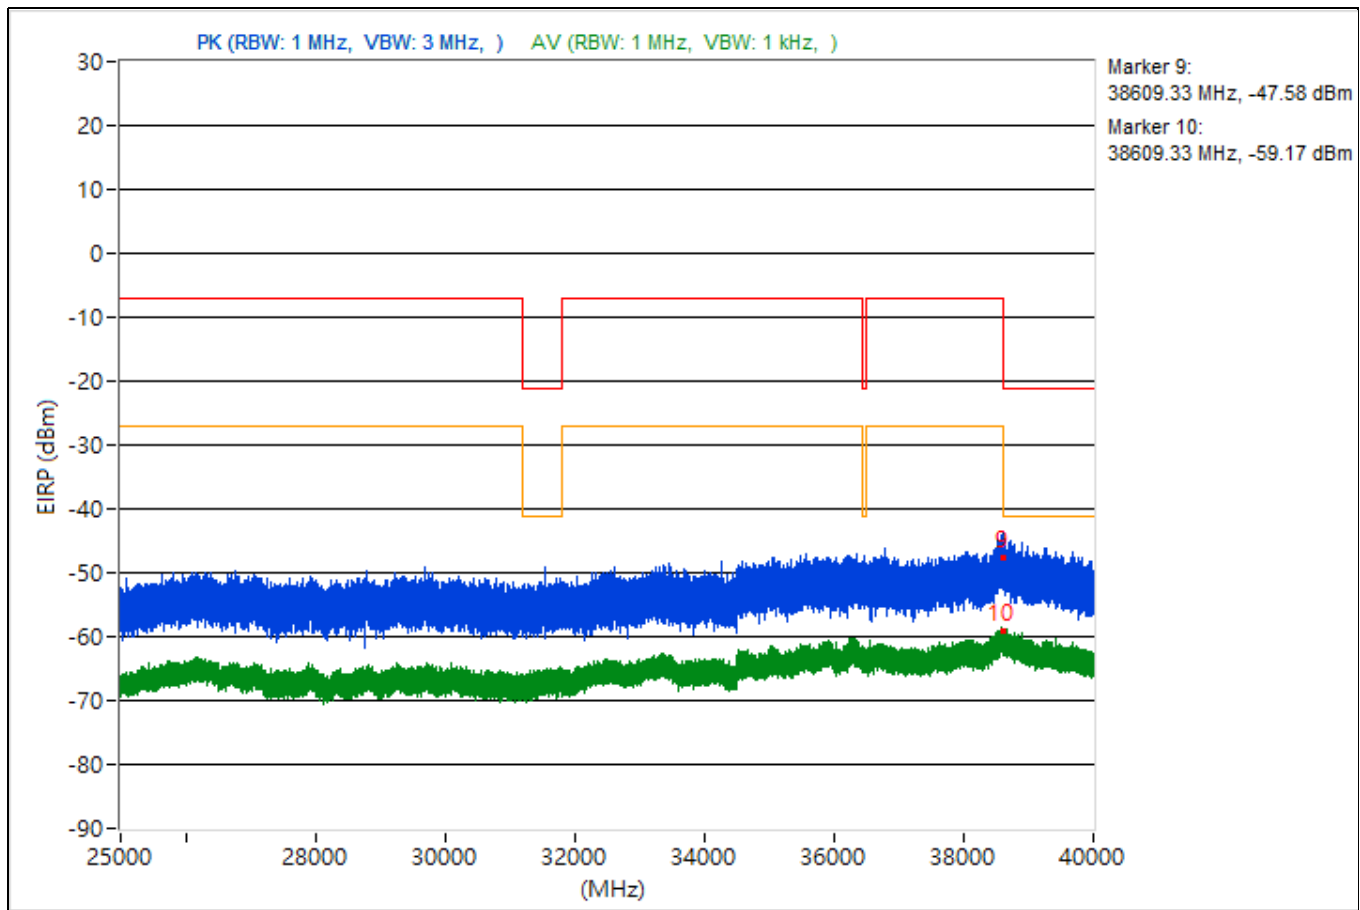


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3838.19	49.73 PK	74	-24.27	-54.4	-52.68	4.92	-45.53
2	3838.19	38.49 AV	54	-15.51	-65.62	-63.95	4.92	-56.77
3	15377.51	47.48 PK	74	-26.52	-57.46	-54.46	4.92	-47.78
4	15377.51	37.52 AV	54	-16.48	-67.19	-64.55	4.92	-57.74
5	19174.2	49.36 PK	74	-24.64	-54.72	-53.09	4.92	-45.9
6	19174.2	38.6 AV	54	-15.4	-63.02	-67.06	4.92	-56.66
7	23608.7	51.01 PK	74	-22.99	-52.19	-52.16	4.92	-44.25
8	23608.7	39.74 AV	54	-14.26	-62.25	-65.1	4.92	-55.52
9	38617.69	48.14 PK	74	-25.86	-55.48	-54.66	4.92	-47.12
10	38617.69	36.63 AV	54	-17.37	-66.94	-66.21	4.92	-58.63

Note: Margin value = Emission Level - Limit value

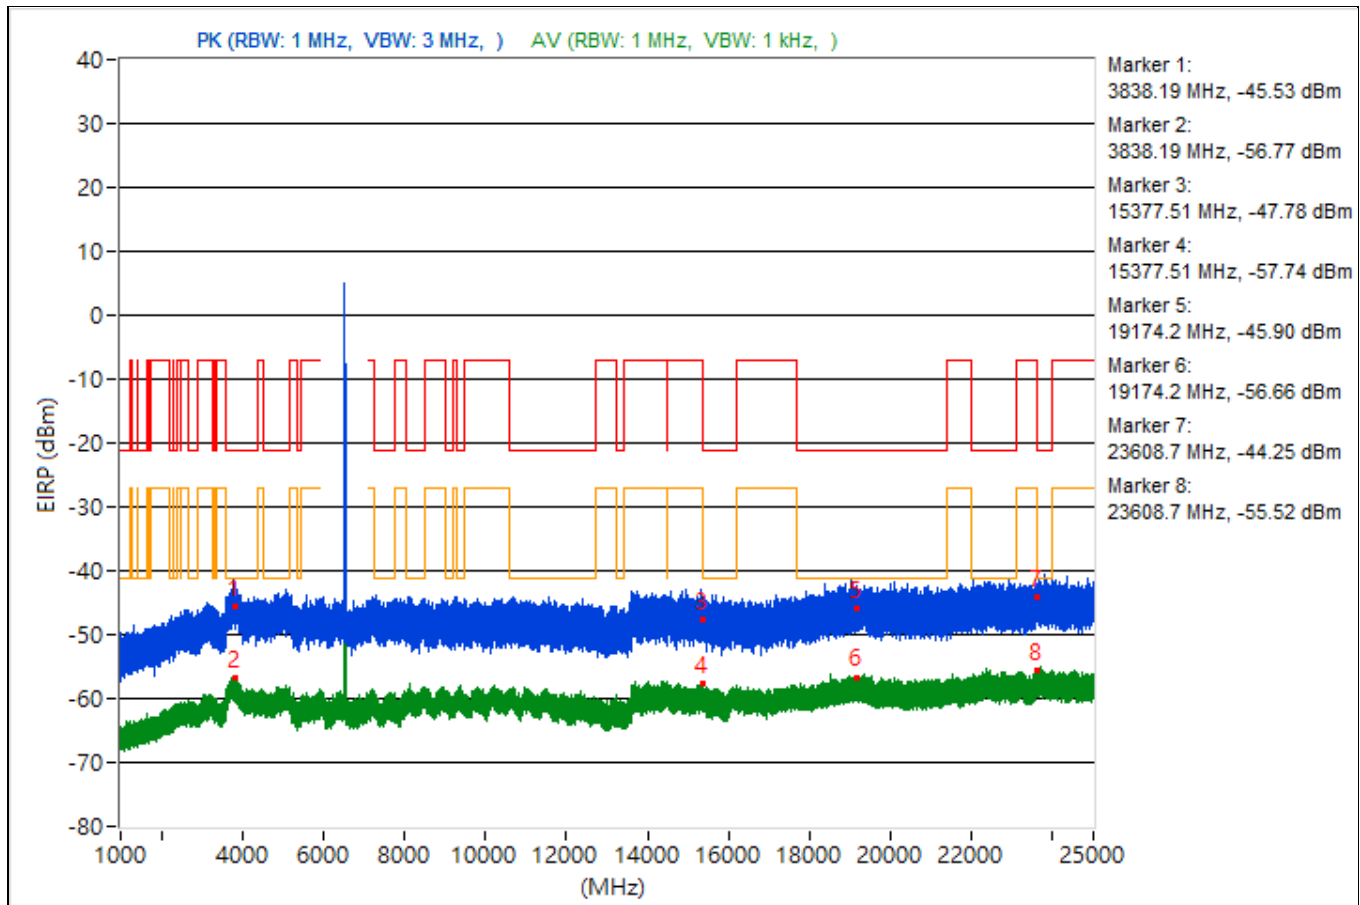


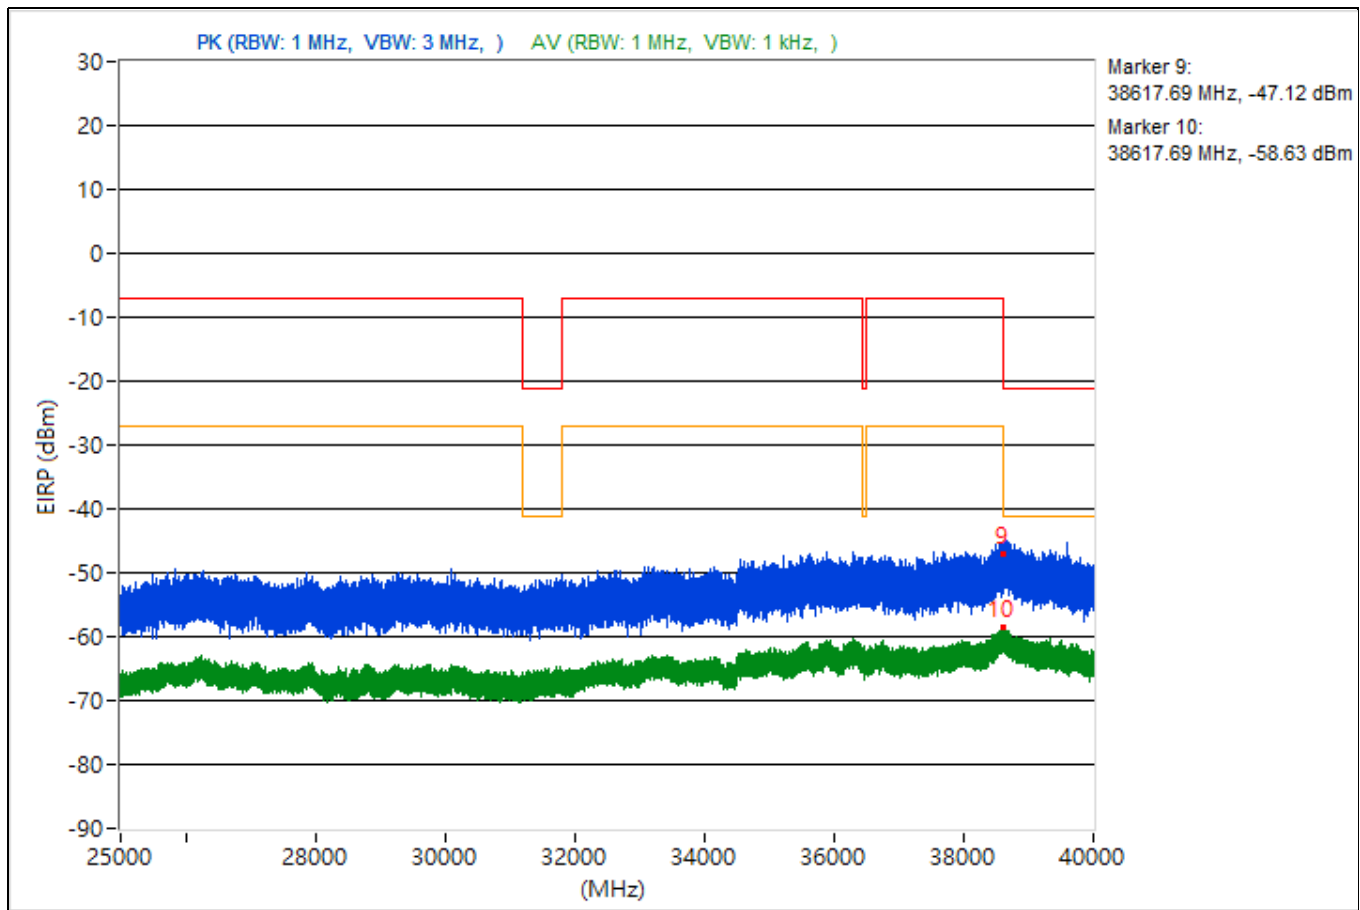


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3756.13	48.54 PK	74	-25.46	-56.44	-53.38	4.92	-46.72
2	3756.13	39.06 AV	54	-14.94	-64.39	-63.88	4.92	-56.2
3	14480.89	47.61 PK	74	-26.39	-55.13	-56.07	4.92	-47.65
4	14480.89	37.52 AV	54	-16.48	-64.85	-66.68	4.92	-57.74
5	18879.1	48.1 PK	74	-25.9	-57.82	-53.42	4.92	-47.16
6	18879.1	38.23 AV	54	-15.77	-63.52	-67.15	4.92	-57.03
7	22425.6	49.76 PK	74	-24.24	-52.14	-55.27	4.92	-45.5
8	22425.6	39.83 AV	54	-14.17	-62.49	-64.46	4.92	-55.43
9	38671.56	44.84 PK	74	-29.16	-58.52	-58.19	4.92	-50.42
10	38671.56	36.27 AV	54	-17.73	-68.34	-65.85	4.92	-58.99

Note: Margin value = Emission Level - Limit value

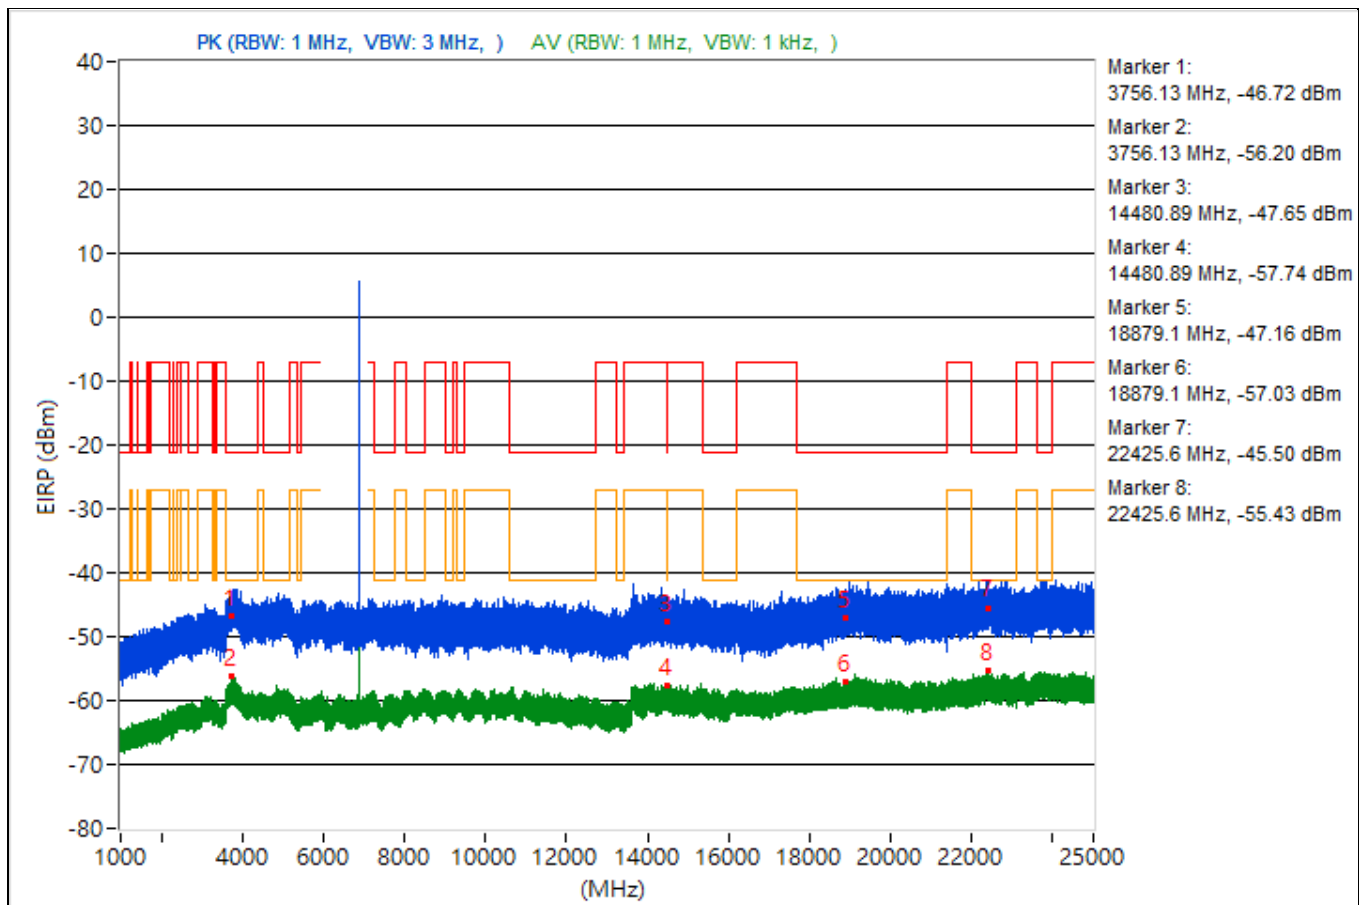


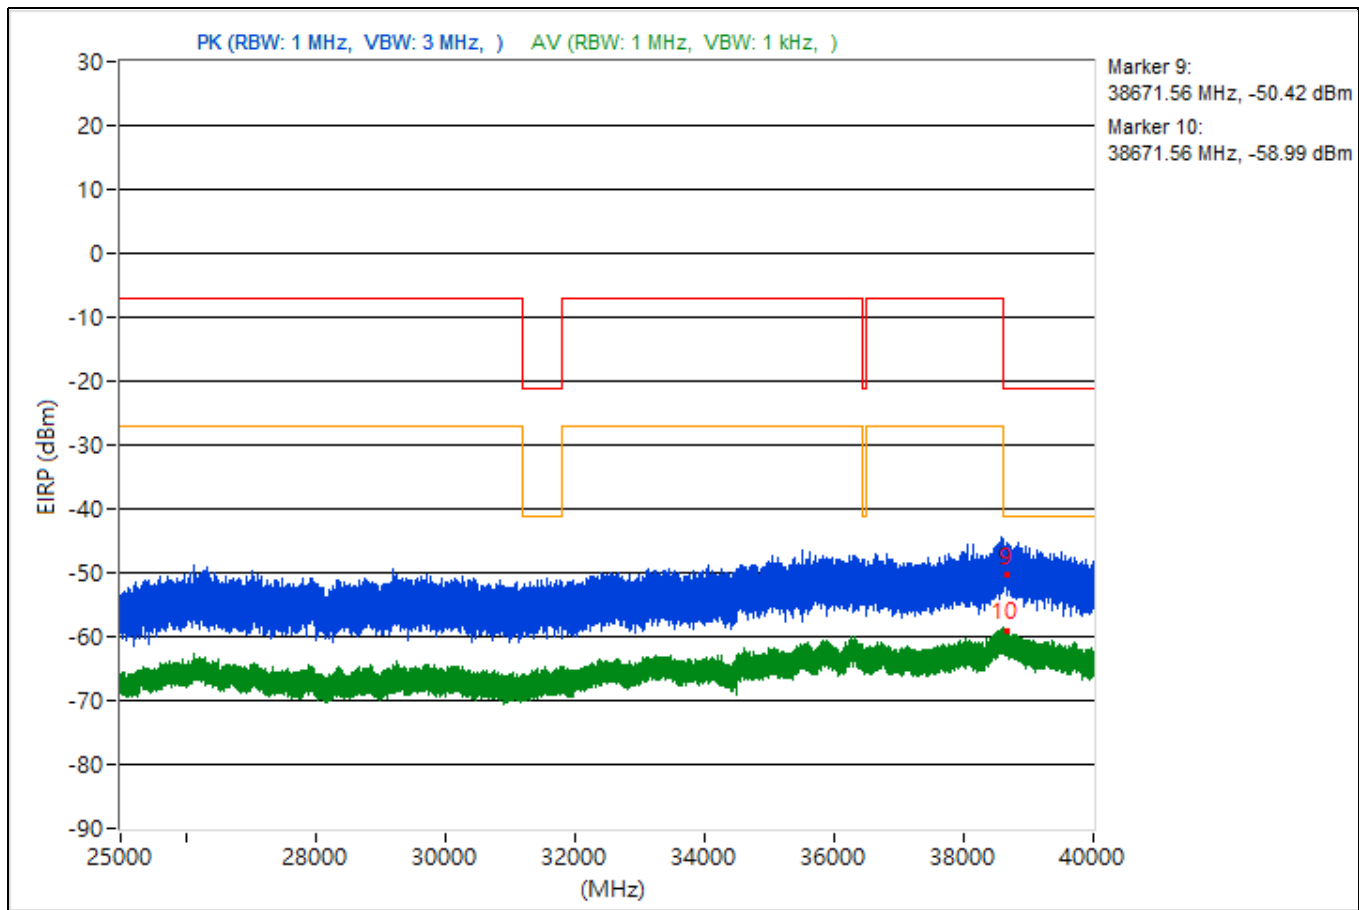


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3843.56	50.38 PK	74	-23.62	-51.6	-54.51	4.92	-44.88
2	3843.56	38.1 AV	54	-15.9	-67.18	-63.68	4.92	-57.16
3	14480.62	49.04 PK	74	-24.96	-54.1	-54.2	4.92	-46.22
4	14480.62	37.17 AV	54	-16.83	-64.96	-67.43	4.92	-58.09
5	19015.1	48.77 PK	74	-25.23	-53.59	-55.46	4.92	-46.49
6	19015.1	38.89 AV	54	-15.11	-63.02	-66.13	4.92	-56.37
7	23607.7	48.17 PK	74	-25.83	-54.97	-55.08	4.92	-47.09
8	23607.7	39.61 AV	54	-14.39	-65.17	-62.43	4.92	-55.65
9	38640.18	46.03 PK	74	-27.97	-55.91	-58.91	4.92	-49.23
10	38640.18	35.73 AV	54	-18.27	-70.06	-65.85	4.92	-59.53

Note: Margin value = Emission Level - Limit value

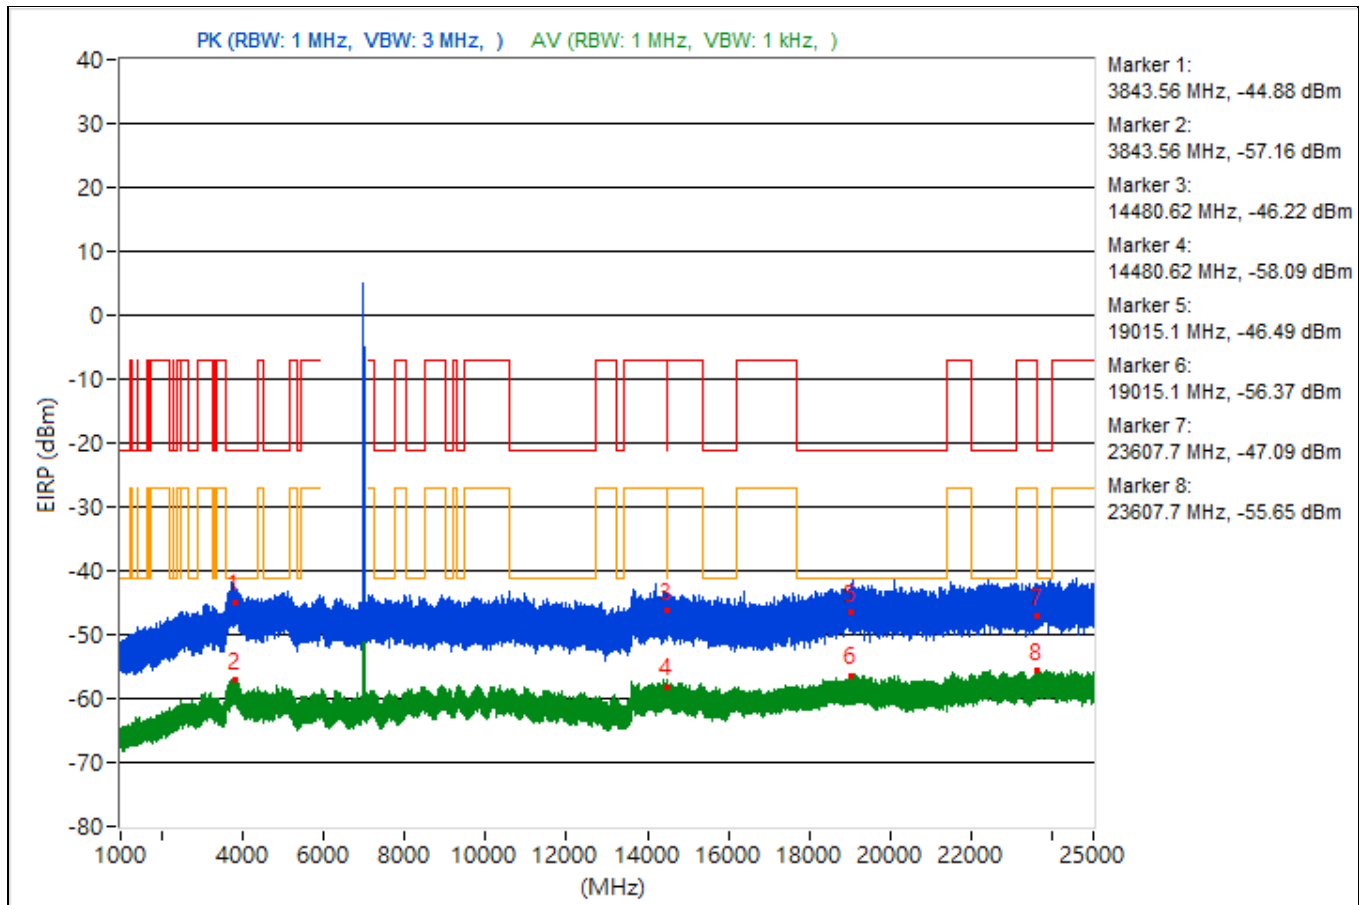


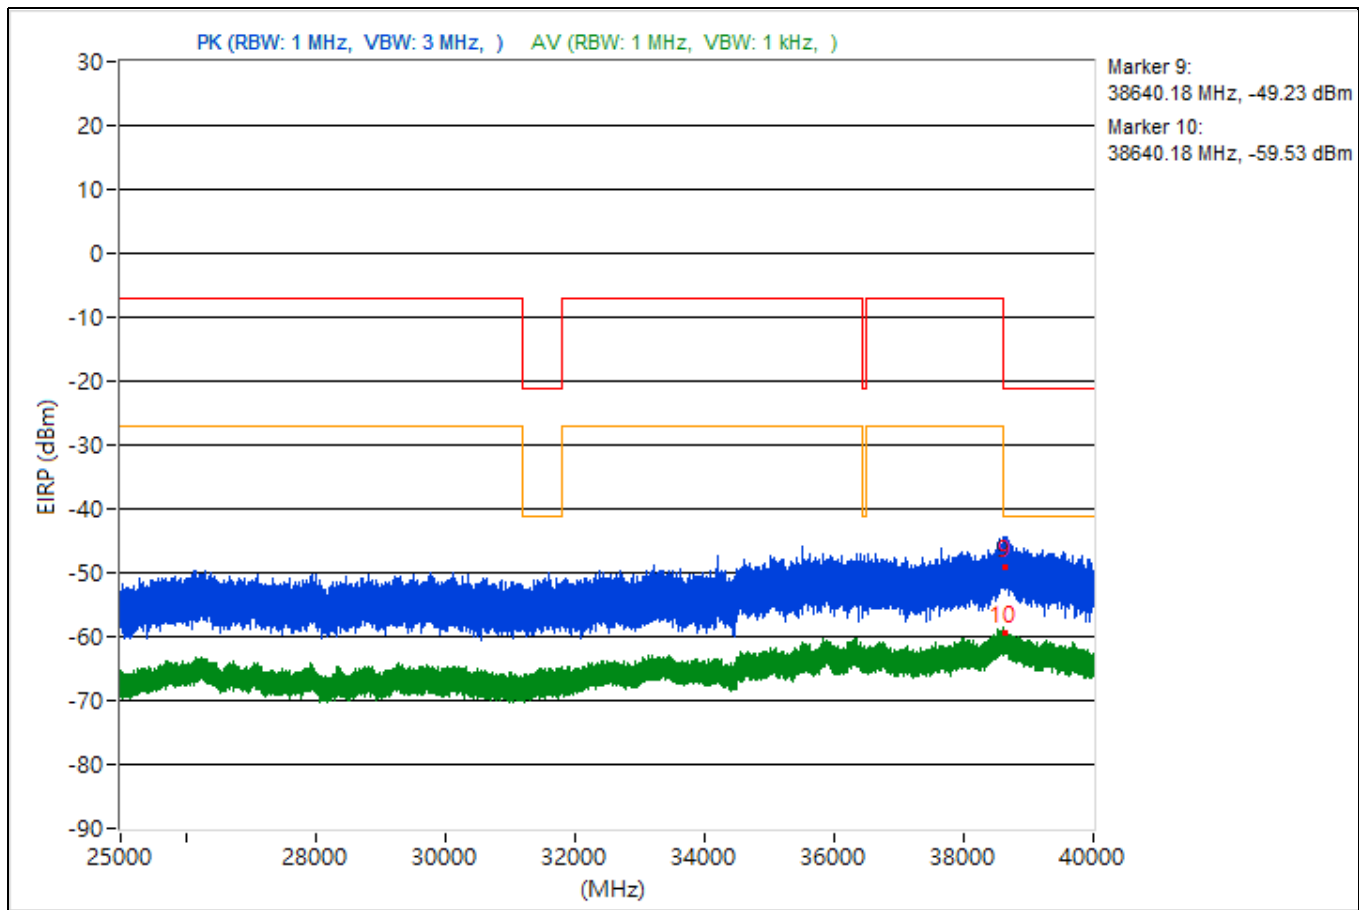


RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3715.14	50.27 PK	74	-23.73	-52.66	-53.2	4.92	-44.99
2	3715.14	38.23 AV	54	-15.77	-65.75	-64.3	4.92	-57.03
3	14484.62	48.81 PK	74	-25.19	-54.4	-54.37	4.92	-46.45
4	14484.62	37.34 AV	54	-16.66	-66.9	-65.01	4.92	-57.92
5	19102.9	47.87 PK	74	-26.13	-54.08	-57.06	4.92	-47.39
6	19102.9	38.55 AV	54	-15.45	-65.85	-63.69	4.92	-56.71
7	23715.9	49.7 PK	74	-24.3	-52.96	-54.08	4.92	-45.56
8	23715.9	39.39 AV	54	-14.61	-65.56	-62.55	4.92	-55.87
9	38627.91	48.01 PK	74	-25.99	-56.77	-54.02	4.92	-47.25
10	38627.91	36.94 AV	54	-17.06	-66.78	-65.78	4.92	-58.32

Note: Margin value = Emission Level - Limit value

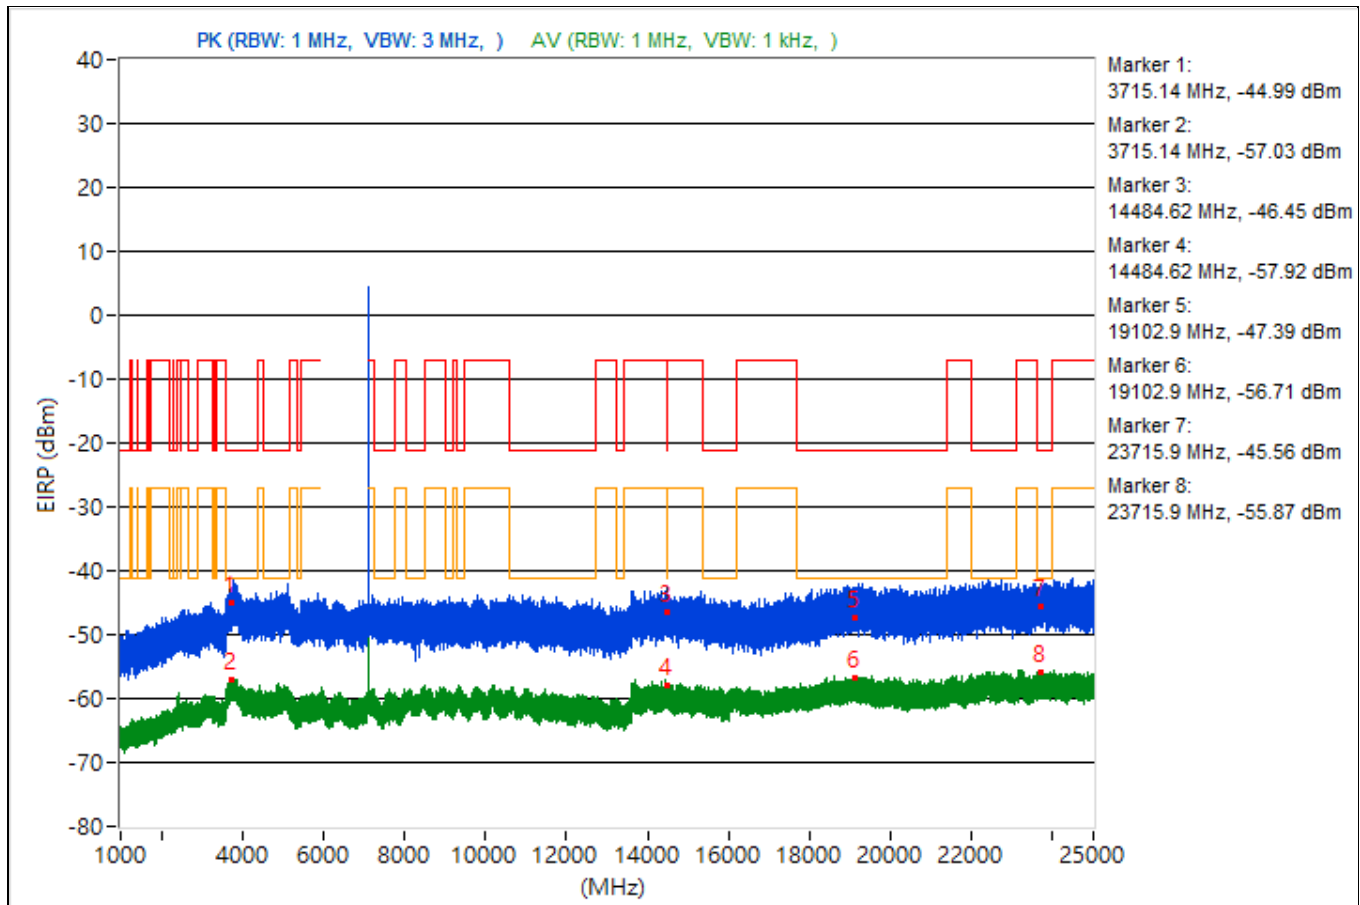


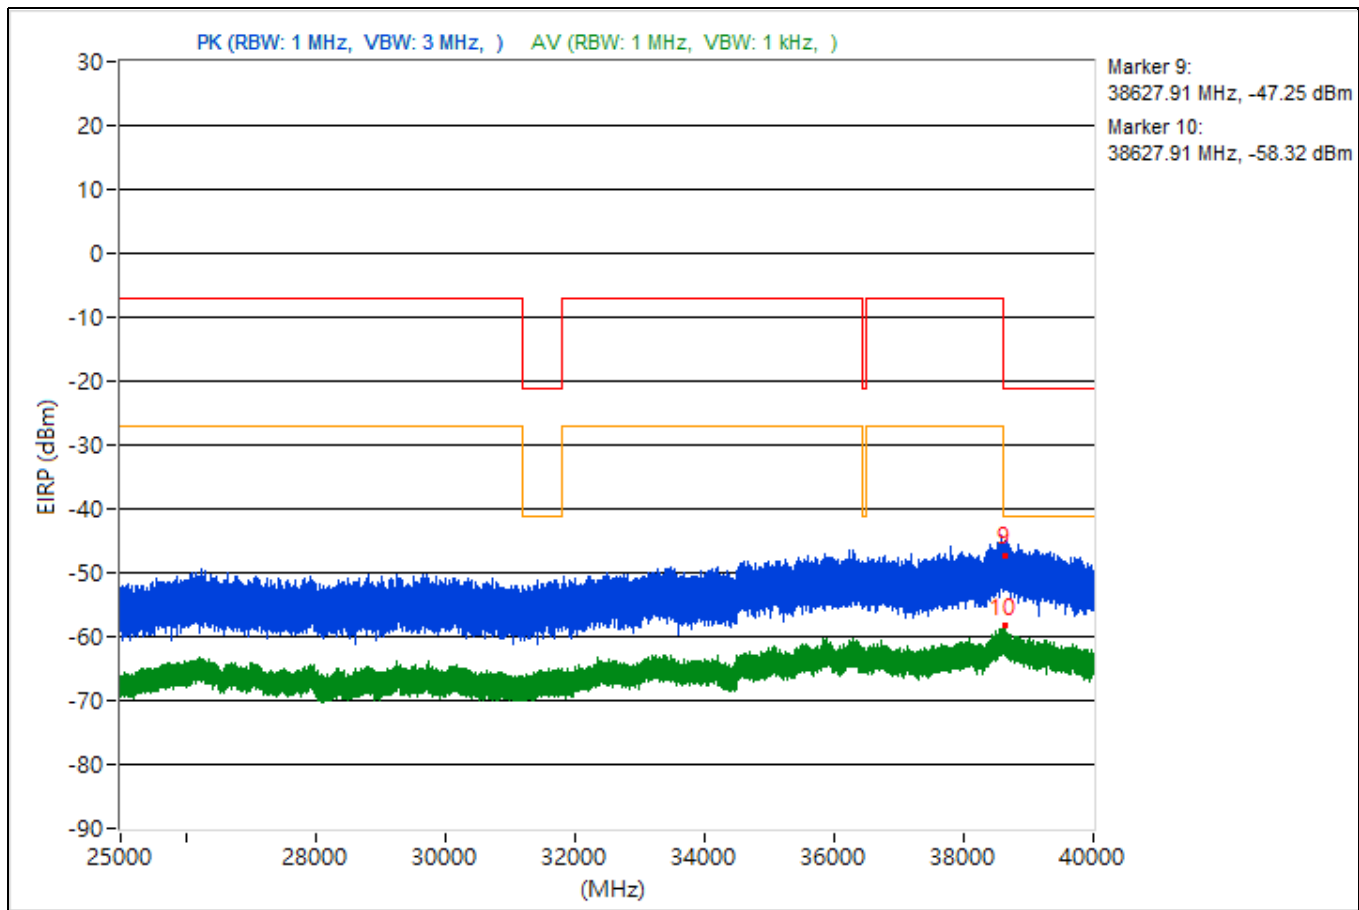


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3759.24	50.87 PK	74	-23.13	-53.47	-51.41	4.92	-44.39
2	3759.24	38.48 AV	54	-15.52	-63.92	-65.68	4.92	-56.78
3	15534.84	47.74 PK	74	-26.26	-56.36	-54.71	4.92	-47.52
4	15534.84	37.33 AV	54	-16.67	-64.77	-67.31	4.92	-57.93
5	19208.9	50.57 PK	74	-23.43	-53.17	-52.14	4.92	-44.69
6	19208.9	38.53 AV	54	-15.47	-66.38	-63.42	4.92	-56.73
7	23635.6	48.94 PK	74	-25.06	-55	-53.61	4.92	-46.32
8	23635.6	39.5 AV	54	-14.5	-65.25	-62.54	4.92	-55.76
9	38600.62	47.5 PK	74	-26.5	-54.82	-56.77	4.92	-47.76
10	38600.62	35.96 AV	54	-18.04	-66.11	-68.75	4.92	-59.3

Note: Margin value = Emission Level - Limit value

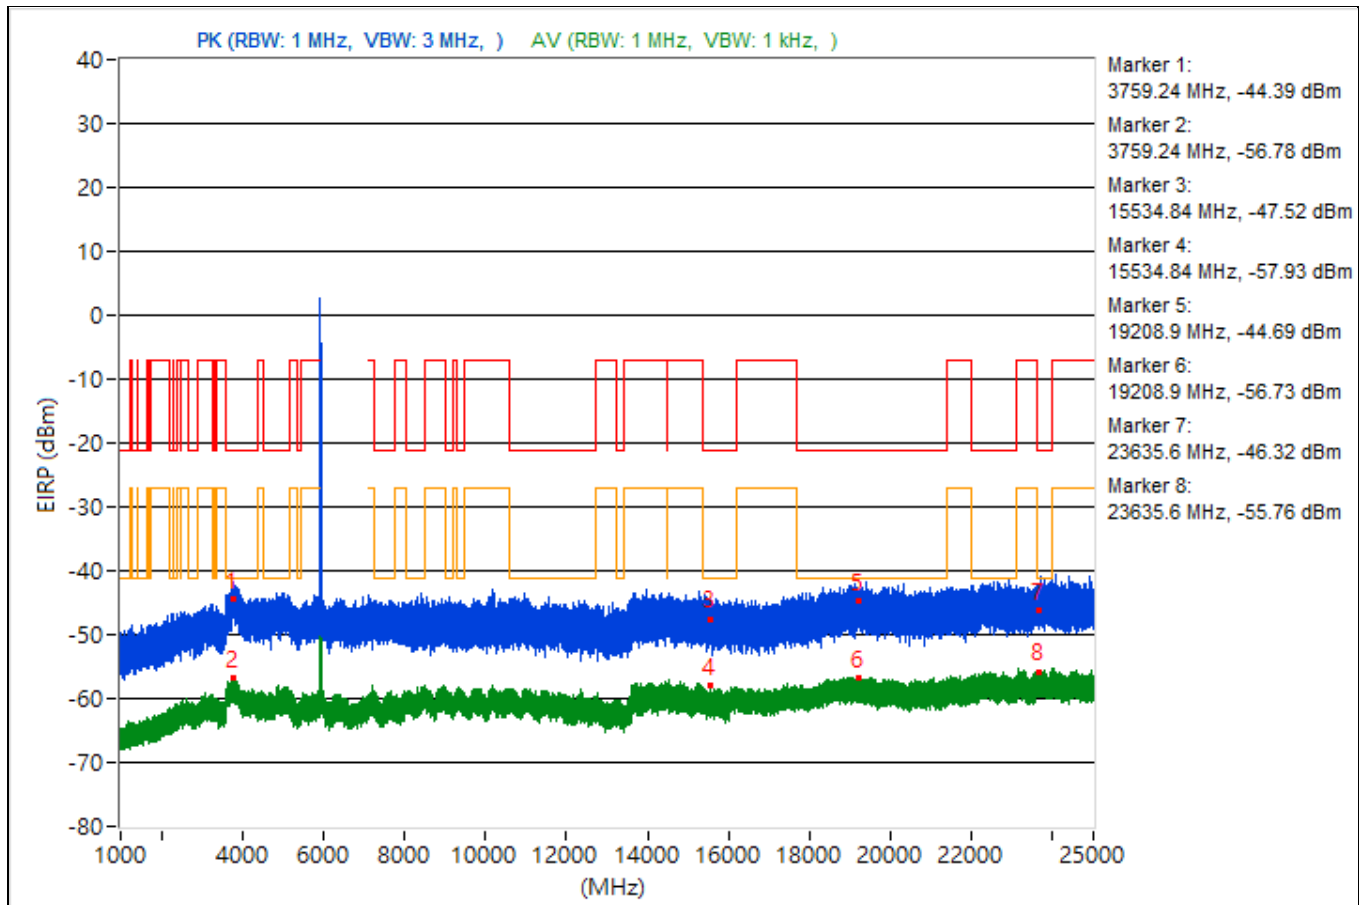


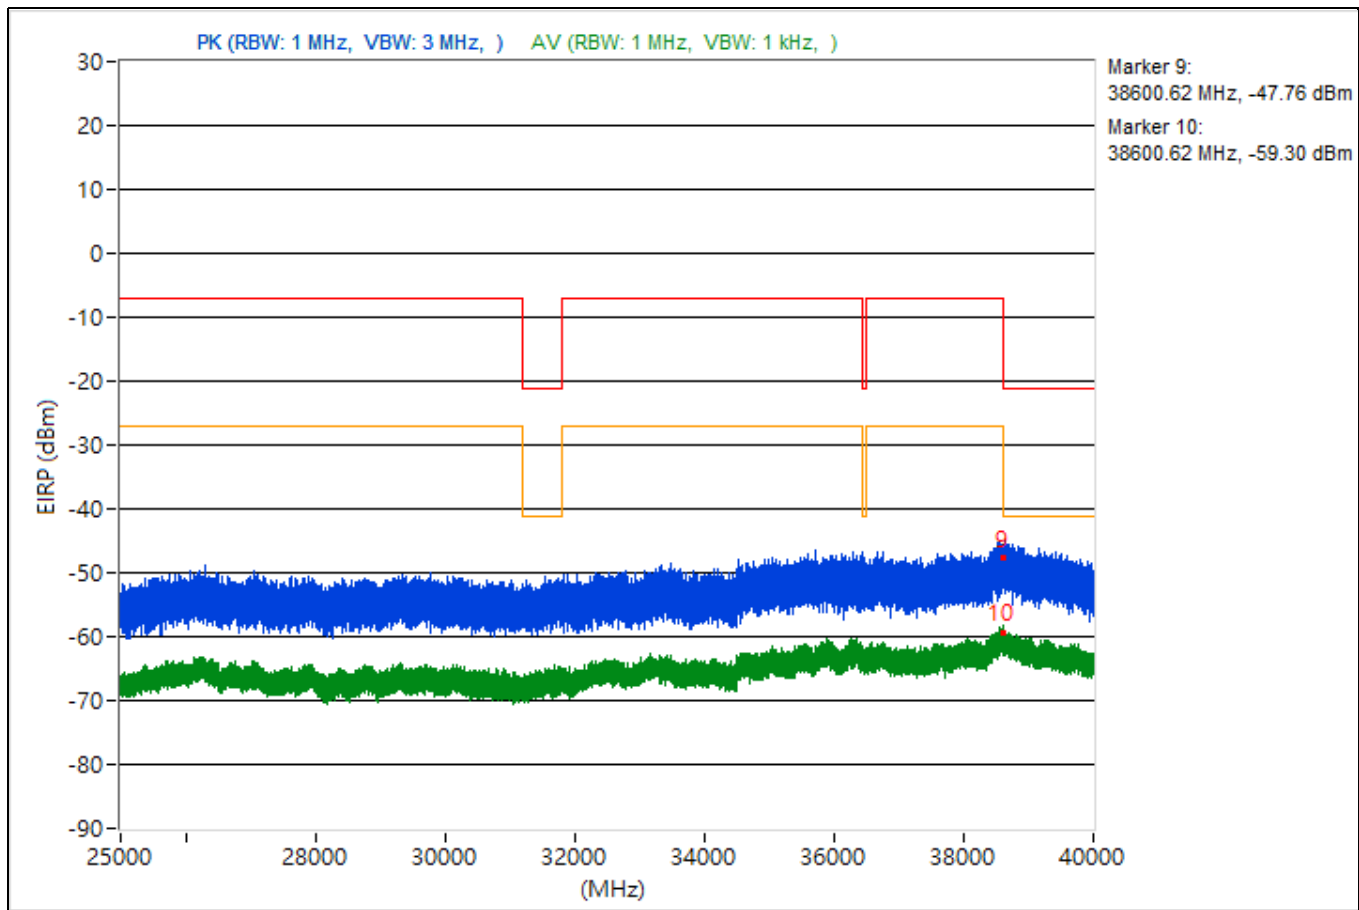


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3765.47	49.6 PK	74	-24.4	-54.73	-52.68	4.92	-45.66
2	3765.47	38.67 AV	54	-15.33	-63.83	-65.34	4.92	-56.59
3	14474.84	48.58 PK	74	-25.42	-54.29	-54.95	4.92	-46.68
4	14474.84	37.54 AV	54	-16.46	-67.17	-64.52	4.92	-57.72
5	19330.1	48.11 PK	74	-25.89	-55.36	-54.81	4.92	-47.15
6	19330.1	38.7 AV	54	-15.3	-63.28	-66.17	4.92	-56.56
7	22774.5	49.23 PK	74	-24.77	-53.94	-53.99	4.92	-46.03
8	22774.5	39.35 AV	54	-14.65	-65.56	-62.6	4.92	-55.91
9	38631.56	46.38 PK	74	-27.62	-58.06	-55.84	4.92	-48.88
10	38631.56	36.57 AV	54	-17.43	-68.15	-65.5	4.92	-58.69

Note: Margin value = Emission Level - Limit value

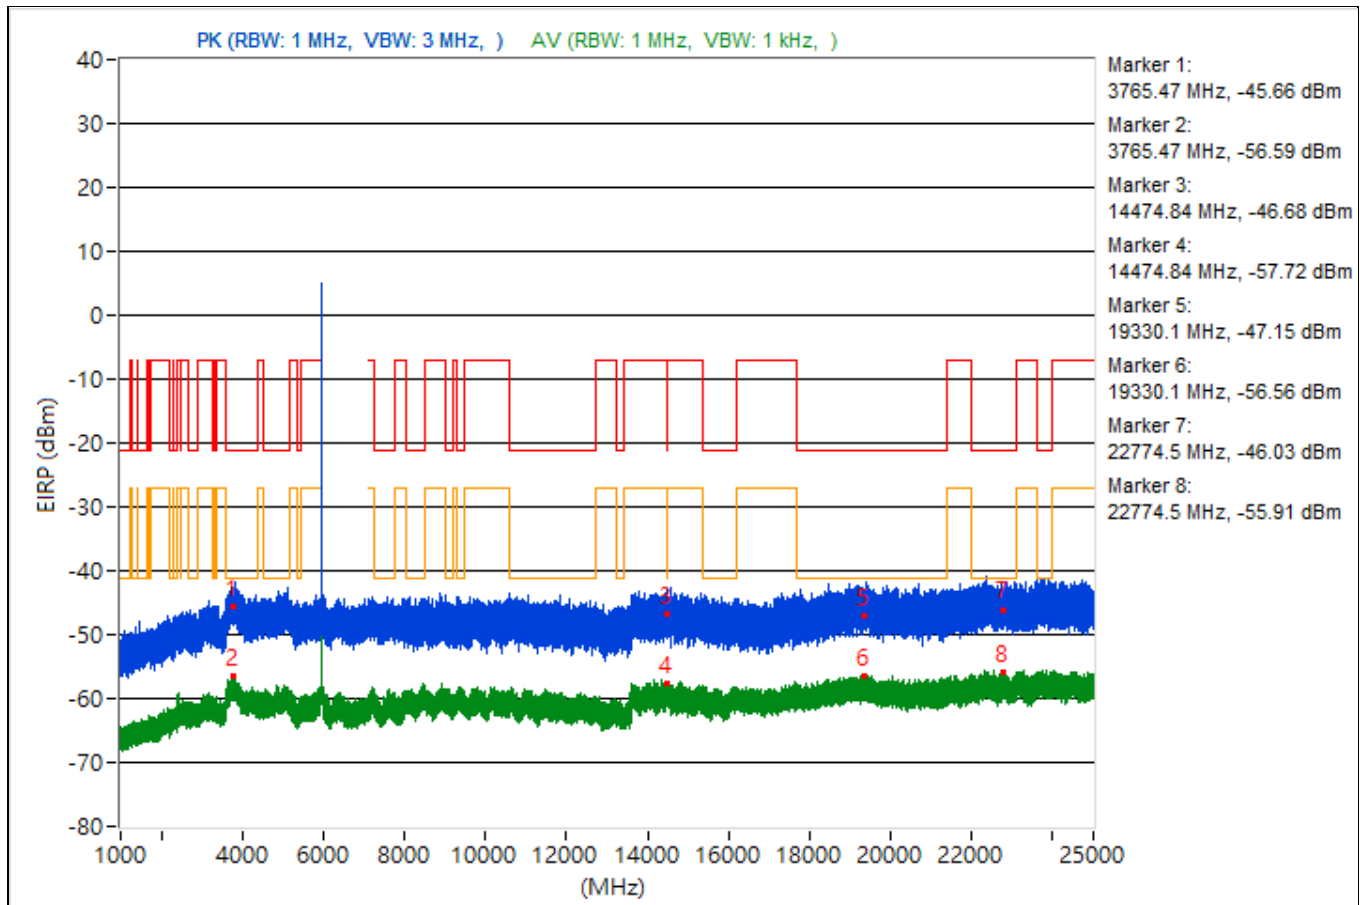


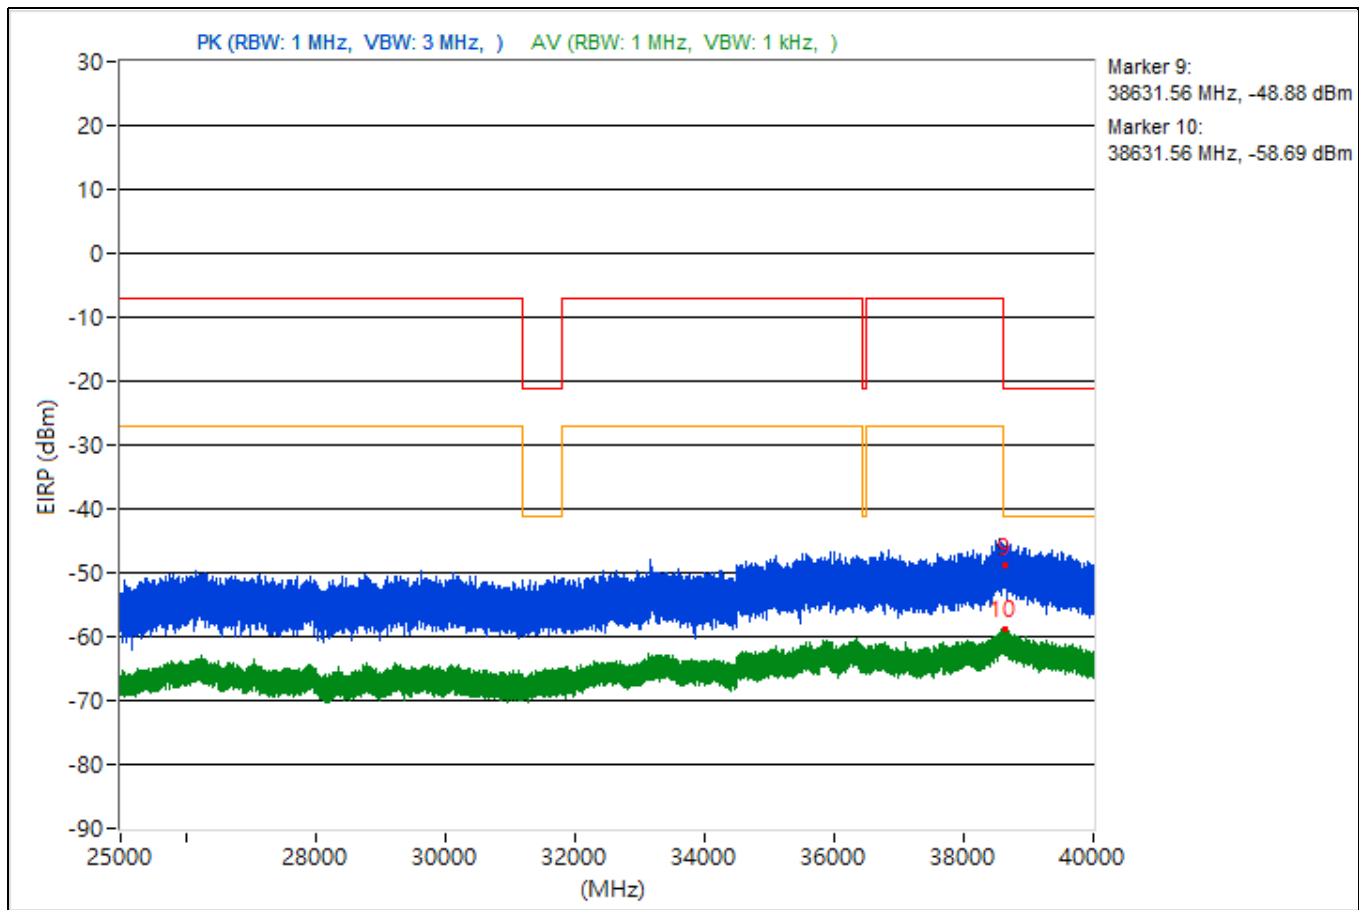


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3823.26	49.27 PK	74	-24.73	-54.59	-53.33	4.92	-45.99
2	3823.26	38.9 AV	54	-15.1	-64.94	-63.73	4.92	-56.36
3	14488.8	47.4 PK	74	-26.6	-57.32	-54.66	4.92	-47.86
4	14488.8	37.54 AV	54	-16.46	-64.93	-66.52	4.92	-57.72
5	19523.8	49.74 PK	74	-24.26	-53.84	-53.09	4.92	-45.52
6	19523.8	38.55 AV	54	-15.45	-63.53	-66.14	4.92	-56.71
7	23685.5	48.84 PK	74	-25.16	-53.4	-55.56	4.92	-46.42
8	23685.5	39.28 AV	54	-14.72	-65.59	-62.7	4.92	-55.98
9	38606.93	45.23 PK	74	-28.77	-56.21	-60.93	4.92	-50.03
10	38606.93	36.71 AV	54	-17.29	-66.03	-66.97	4.92	-58.55

Note: Margin value = Emission Level - Limit value

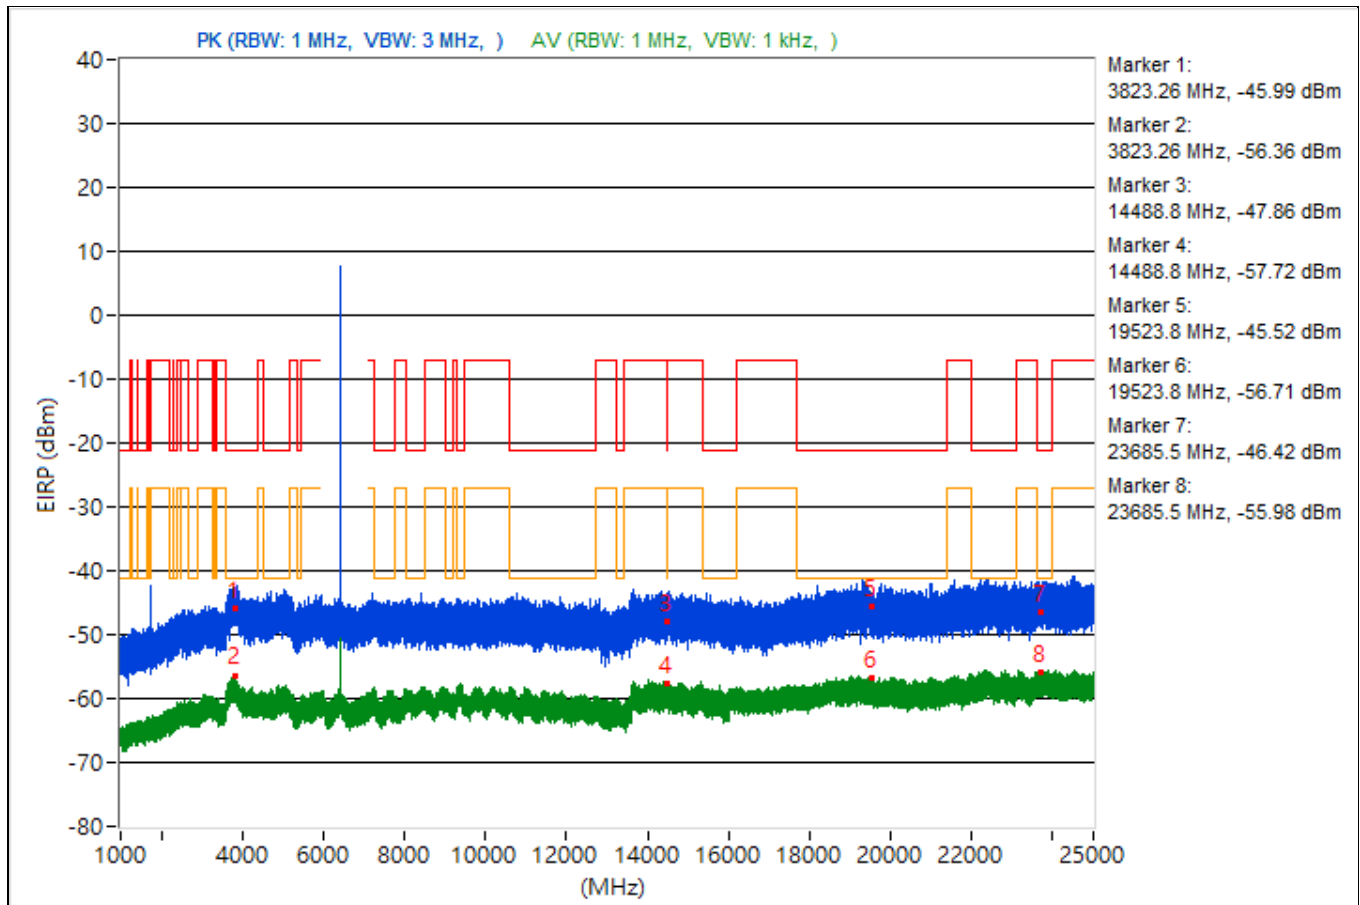


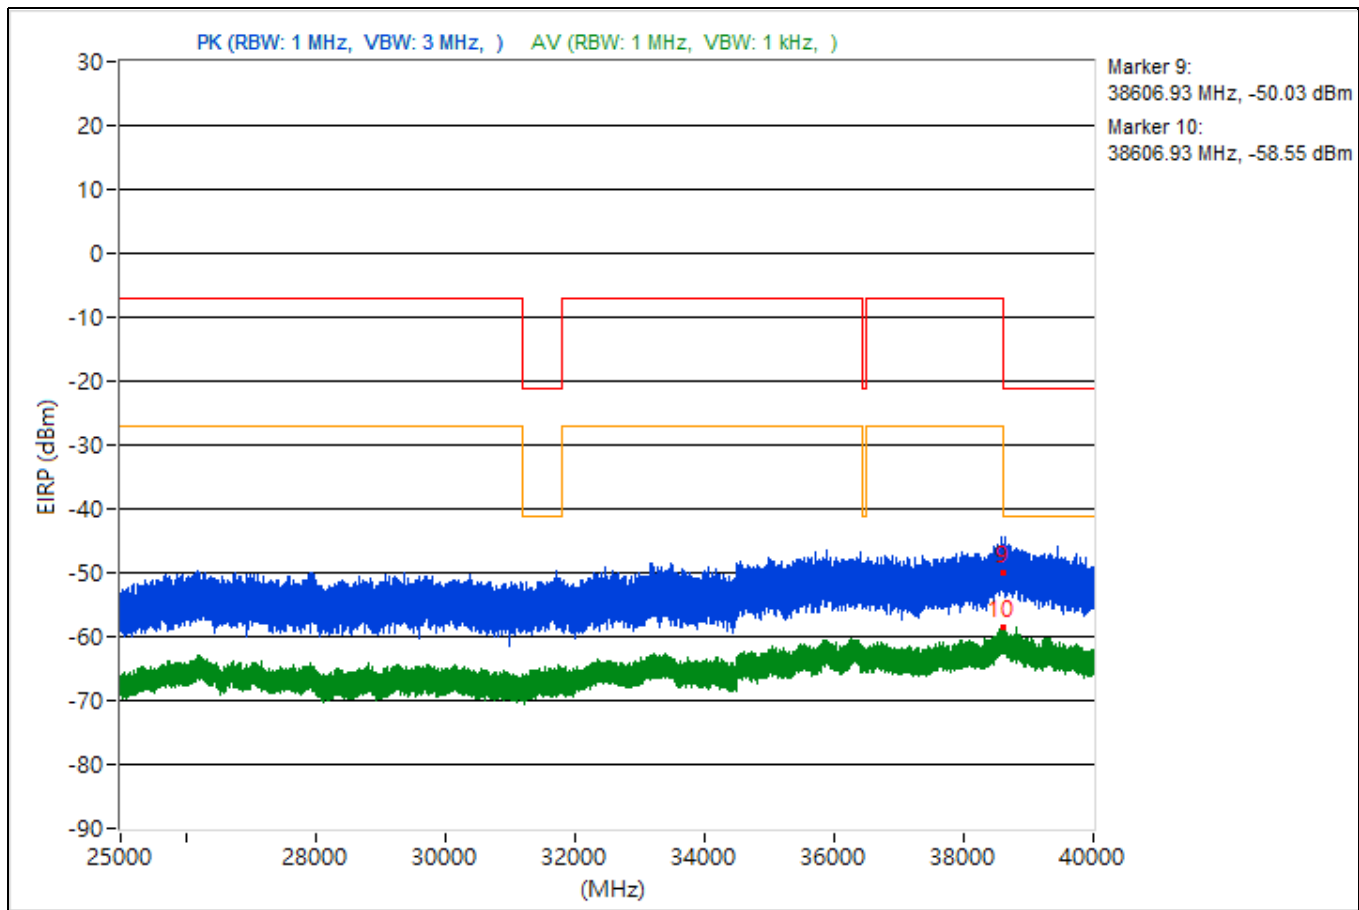


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3751.08	49.37 PK	74	-24.63	-53.71	-53.93	4.92	-45.89
2	3751.08	38.57 AV	54	-15.43	-65.3	-64.04	4.92	-56.69
3	14470.22	49.15 PK	74	-24.85	-54.6	-53.55	4.92	-46.11
4	14470.22	37.36 AV	54	-16.64	-66.68	-65.12	4.92	-57.9
5	19118.4	47.54 PK	74	-26.46	-56.11	-55.23	4.92	-47.72
6	19118.4	38.86 AV	54	-15.14	-63.59	-65.21	4.92	-56.4
7	23782.5	50.98 PK	74	-23.02	-53.13	-51.45	4.92	-44.28
8	23782.5	39.67 AV	54	-14.33	-65.22	-62.31	4.92	-55.59
9	38651.29	45.9 PK	74	-28.1	-57.21	-57.37	4.92	-49.36
10	38651.29	36.61 AV	54	-17.39	-65.72	-67.66	4.92	-58.65

Note: Margin value = Emission Level - Limit value

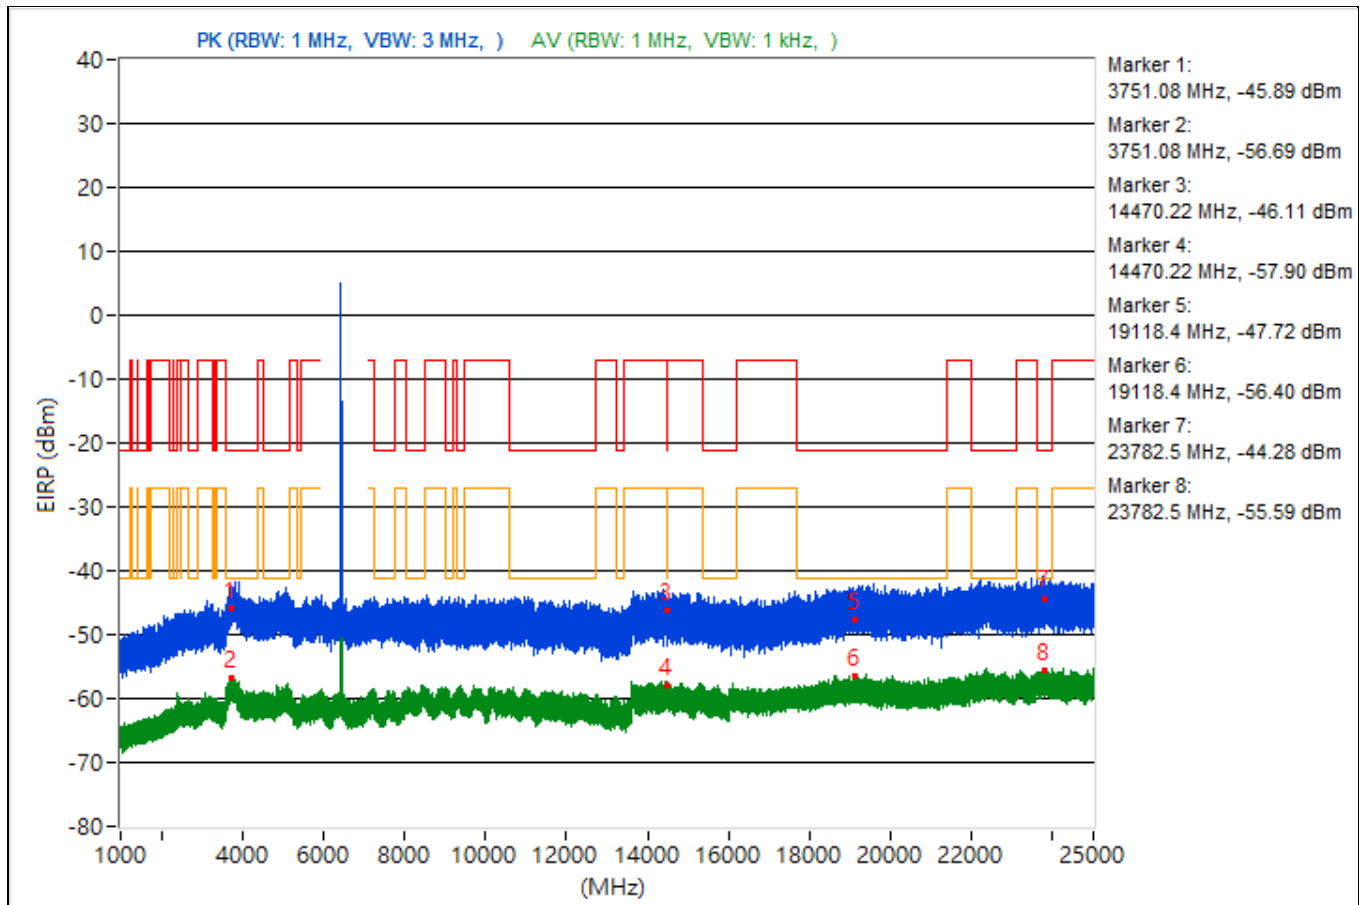


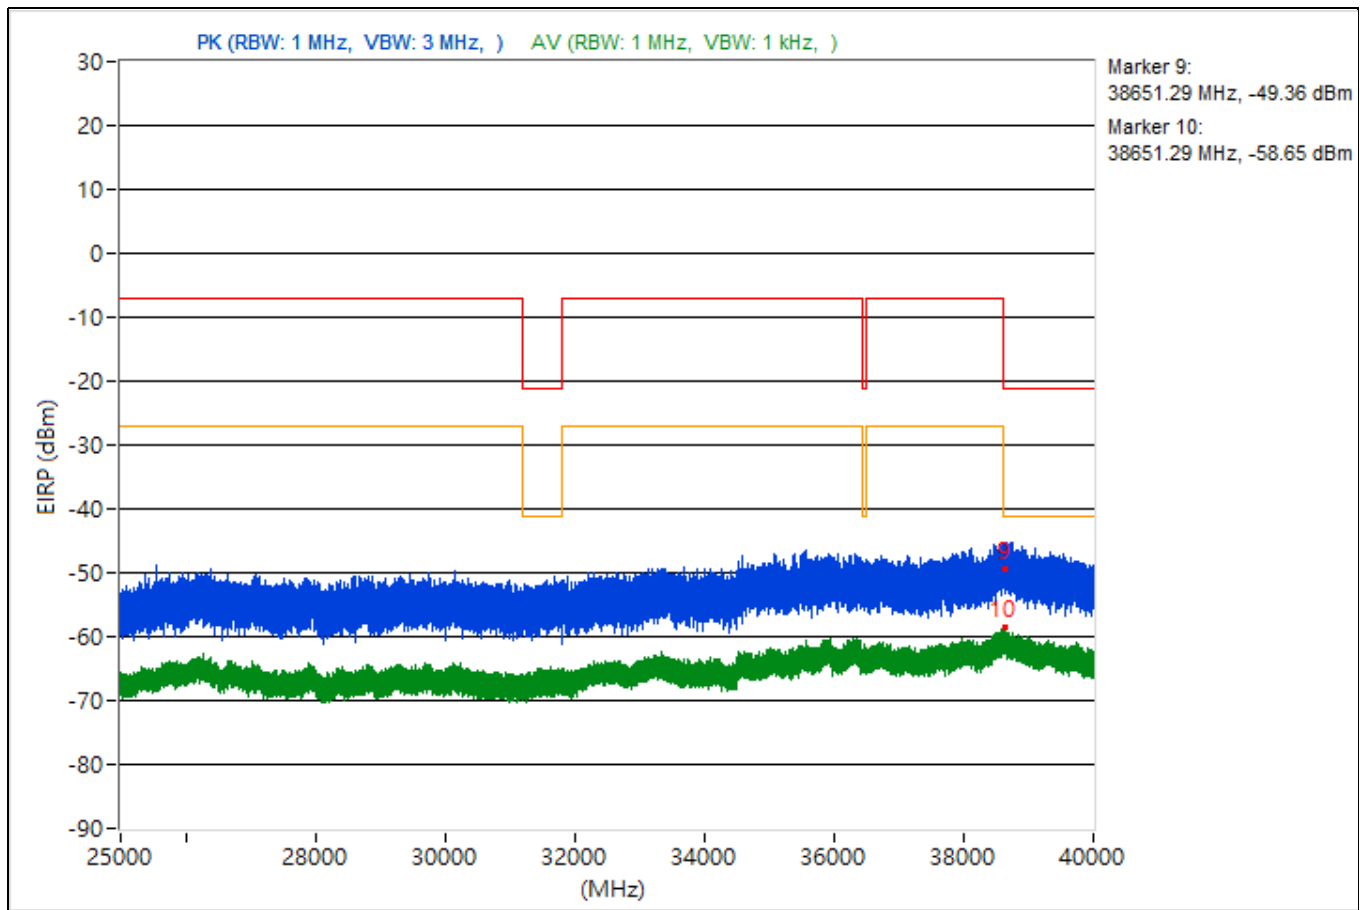


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3771.07	49.28 PK	74	-24.72	-53.66	-54.17	4.92	-45.98
2	3771.07	38.87 AV	54	-15.13	-65.28	-63.53	4.92	-56.39
3	14490.49	47.62 PK	74	-26.38	-55.75	-55.4	4.92	-47.64
4	14490.49	37.03 AV	54	-16.97	-68.4	-64.68	4.92	-58.23
5	19230.4	50.03 PK	74	-23.97	-54.16	-52.35	4.92	-45.23
6	19230.4	38.96 AV	54	-15.04	-63.01	-65.93	4.92	-56.3
7	23820.3	50.19 PK	74	-23.81	-51.47	-55.4	4.92	-45.07
8	23820.3	39.31 AV	54	-14.69	-62.29	-66.4	4.92	-55.95
9	38652.8	47.4 PK	74	-26.6	-56.9	-54.91	4.92	-47.86
10	38652.8	36.06 AV	54	-17.94	-65.56	-69.62	4.92	-59.2

Note: Margin value = Emission Level - Limit value

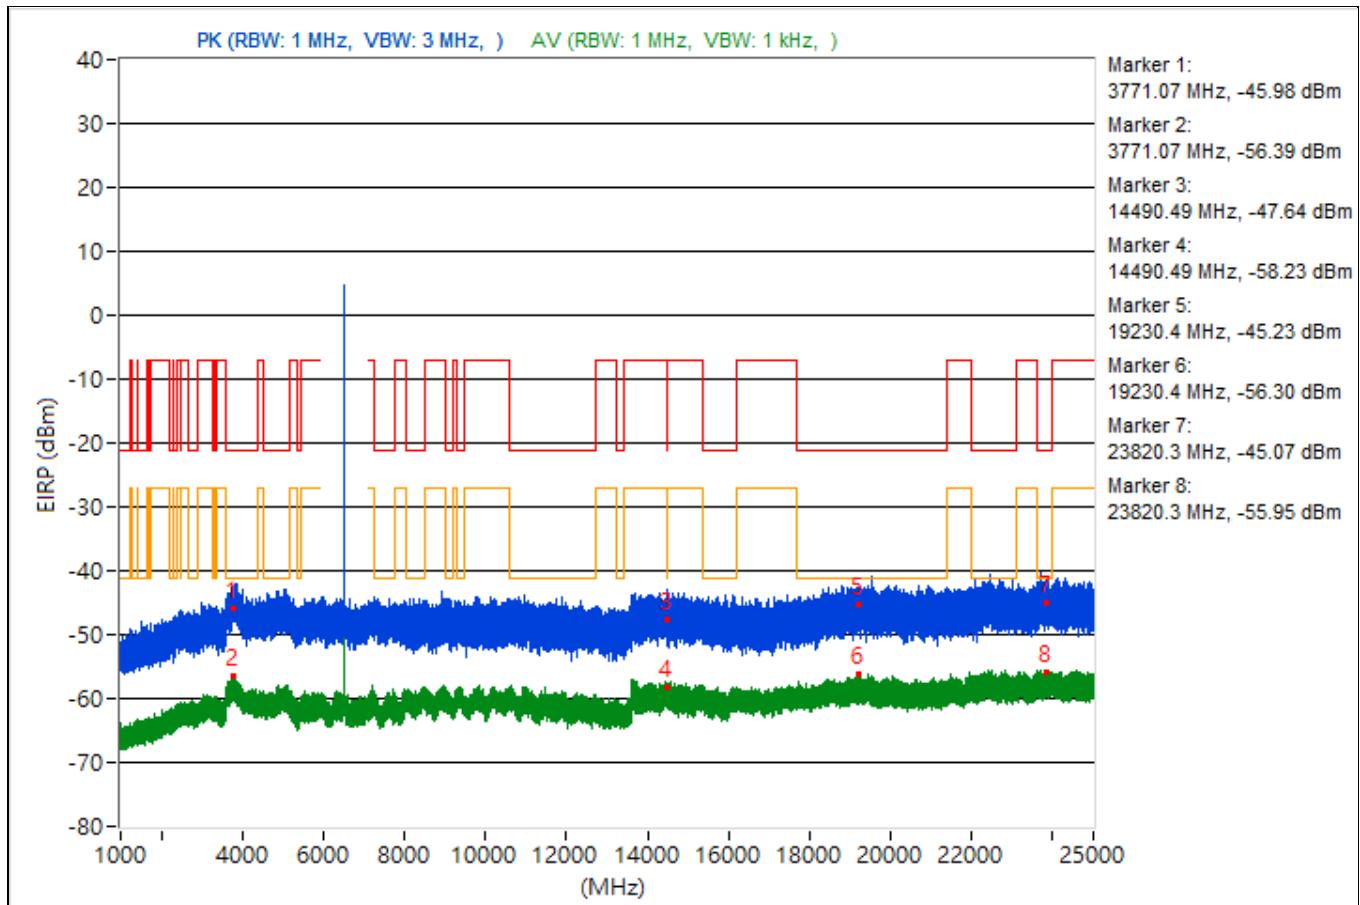


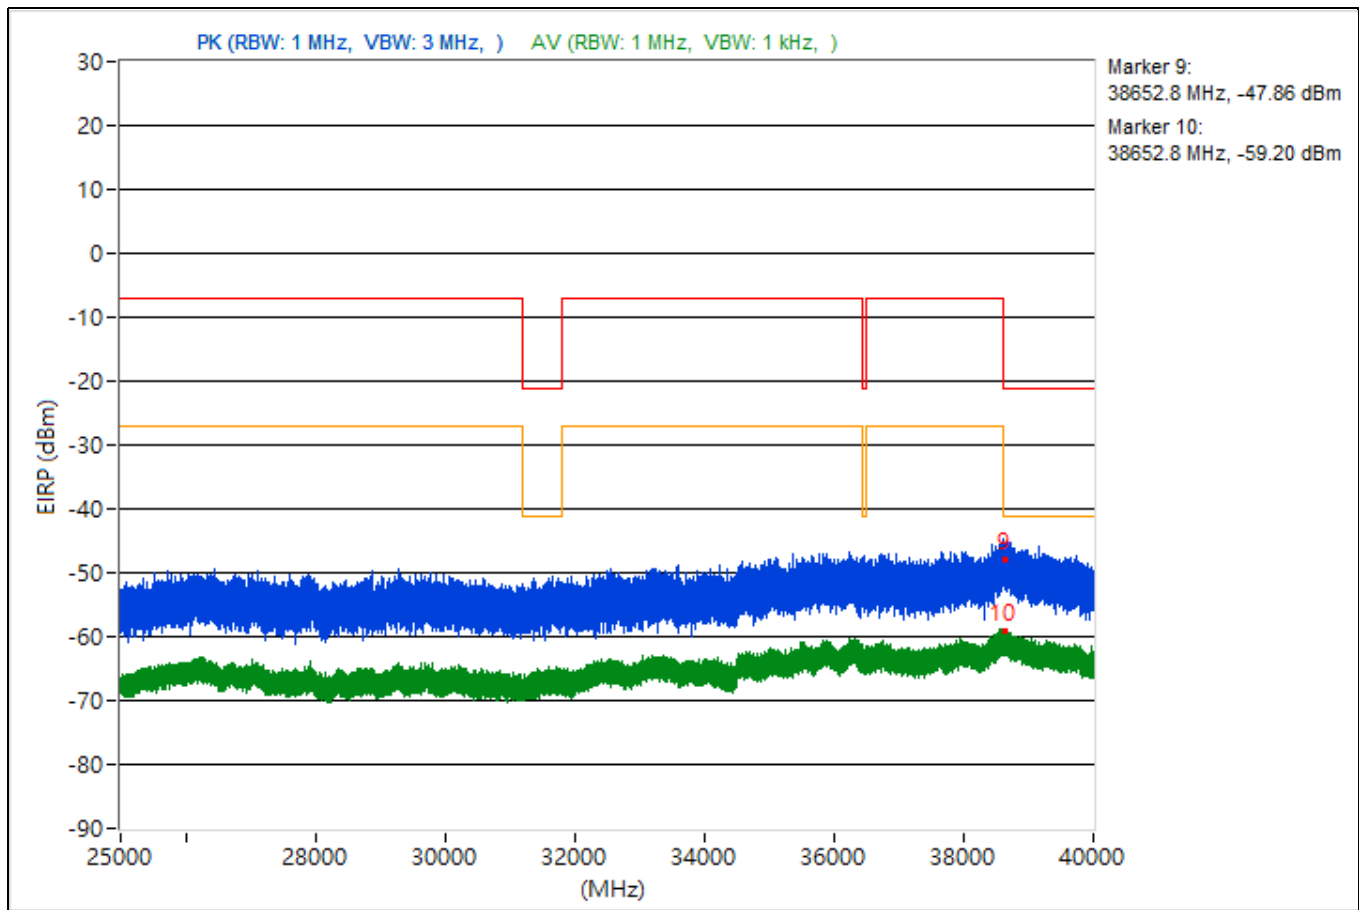


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3805.21	52.32 PK	74	-21.68	-51.32	-50.47	4.92	-42.94
2	3805.21	38.64 AV	54	-15.36	-65.7	-63.64	4.92	-56.62
3	8474.4	47.57 PK	74	-26.43	-56.85	-54.67	4.92	-47.69
4	8474.4	37.35 AV	54	-16.65	-64.69	-67.4	4.92	-57.91
5	19245	49.43 PK	74	-24.57	-53.38	-54.18	4.92	-45.83
6	19245	38.36 AV	54	-15.64	-63.71	-66.34	4.92	-56.9
7	23910	50.15 PK	74	-23.85	-52.04	-54.36	4.92	-45.11
8	23910	39.56 AV	54	-14.44	-62.54	-65.09	4.92	-55.7
9	38632.8	48.11 PK	74	-25.89	-54.15	-56.29	4.92	-47.15
10	38632.8	36.32 AV	54	-17.68	-66.06	-67.86	4.92	-58.94

Note: Margin value = Emission Level - Limit value

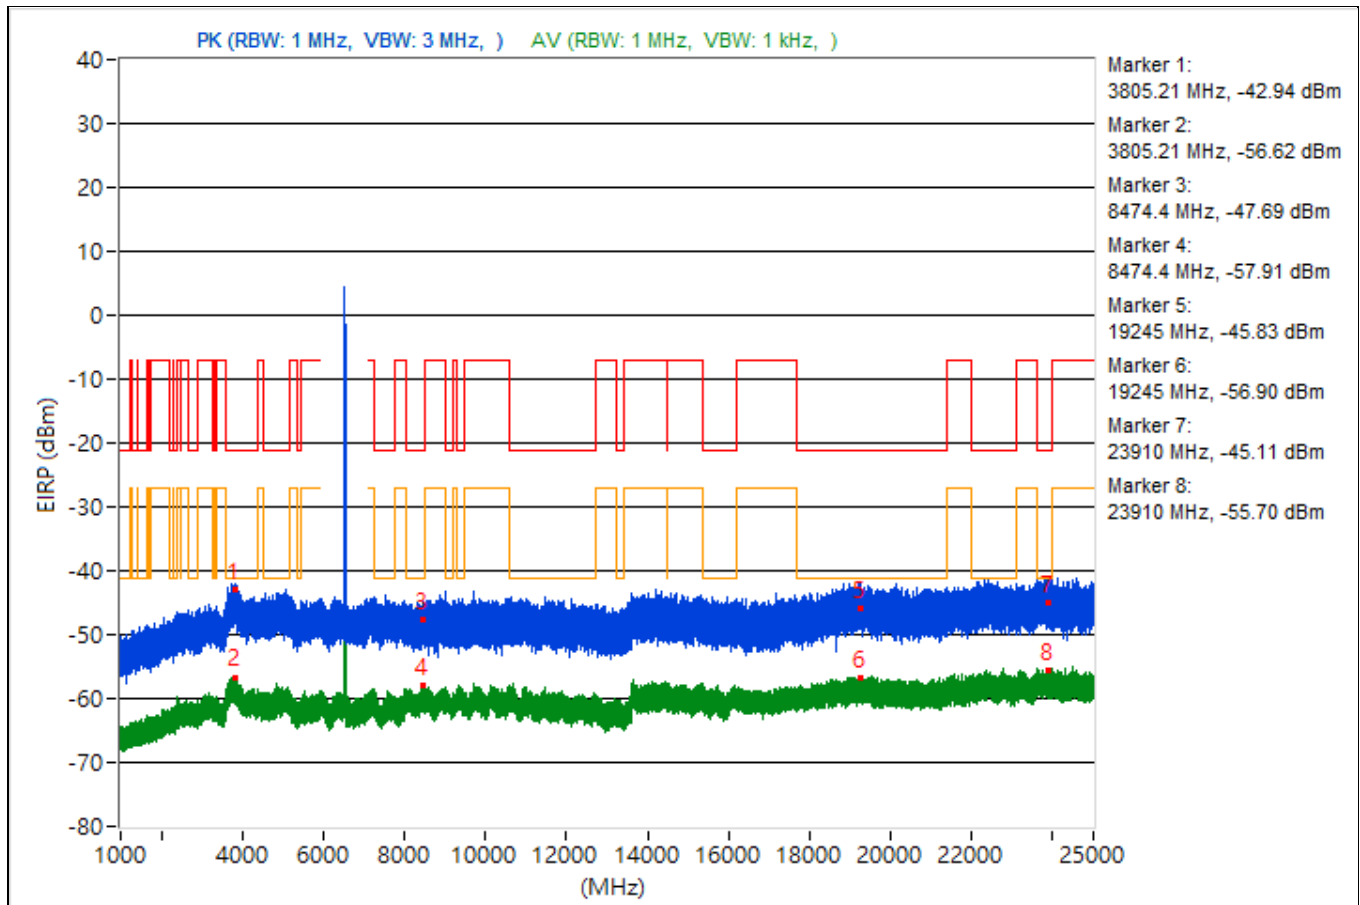


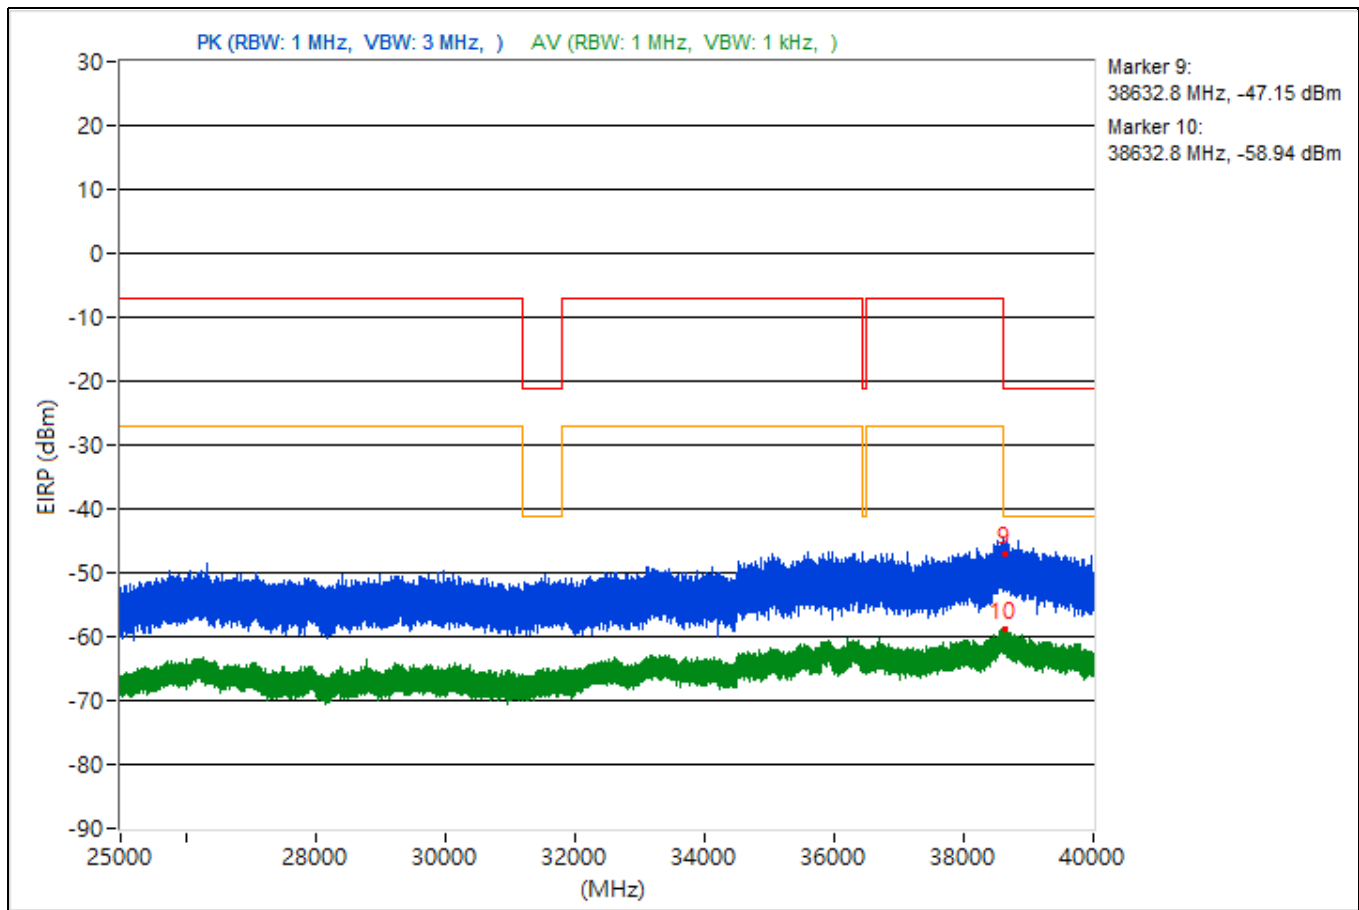


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3776.59	50.24 PK	74	-23.76	-53.32	-52.6	4.92	-45.02
2	3776.59	38.55 AV	54	-15.45	-65.93	-63.64	4.92	-56.71
3	15380.27	50.34 PK	74	-23.66	-54.95	-51.44	4.92	-44.92
4	15380.27	37.17 AV	54	-16.83	-68.25	-64.55	4.92	-58.09
5	19392.1	50.58 PK	74	-23.42	-51.39	-54.32	4.92	-44.68
6	19392.1	38.77 AV	54	-15.23	-63.69	-65.29	4.92	-56.49
7	23849	49.16 PK	74	-24.84	-54.08	-53.98	4.92	-46.1
8	23849	39.34 AV	54	-14.66	-65.41	-62.7	4.92	-55.92
9	38624.36	45.49 PK	74	-28.51	-58.25	-57.21	4.92	-49.77
10	38624.36	36.49 AV	54	-17.51	-65.92	-67.66	4.92	-58.77

Note: Margin value = Emission Level - Limit value

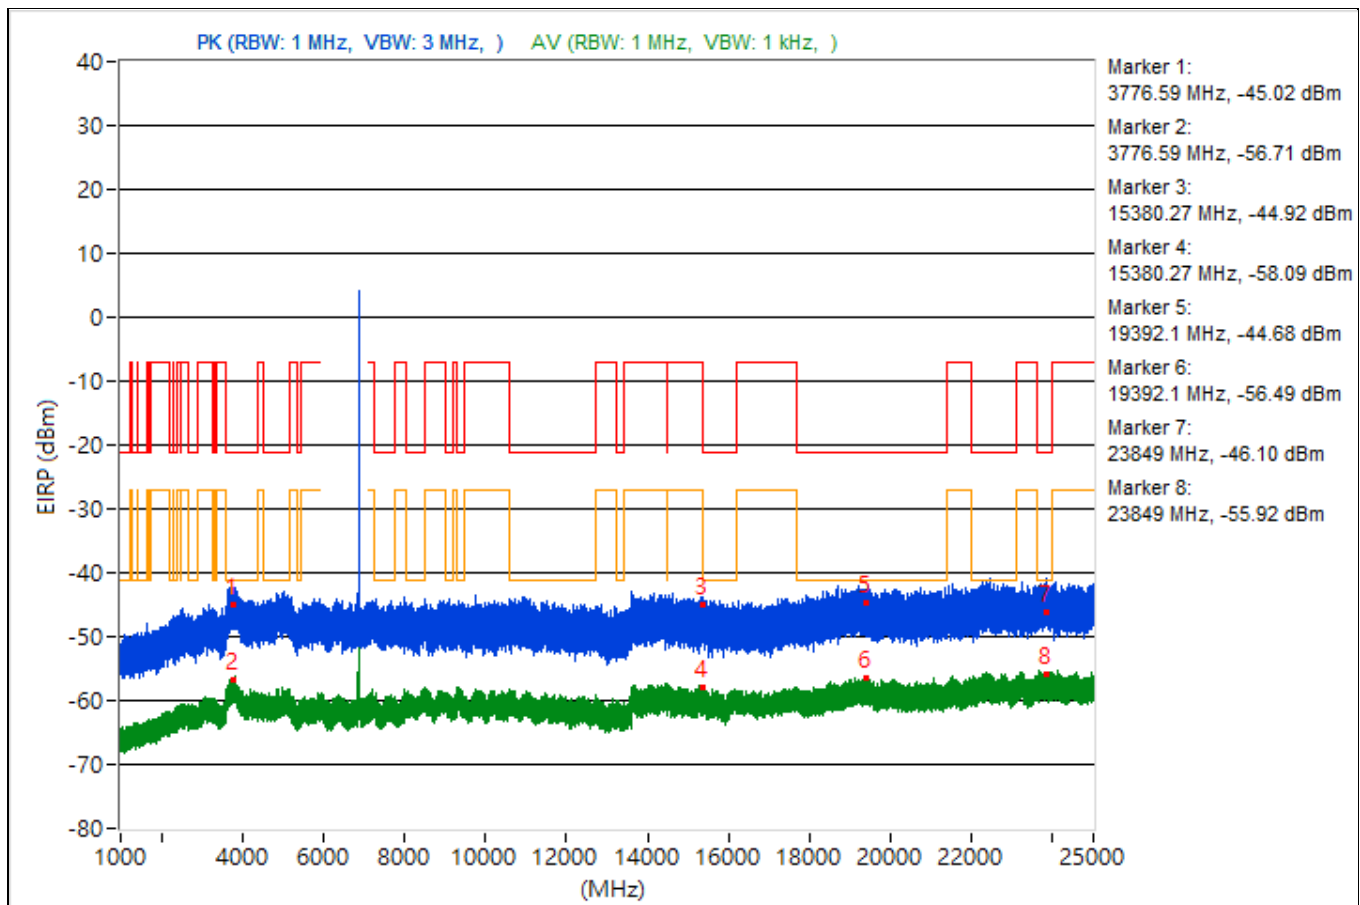


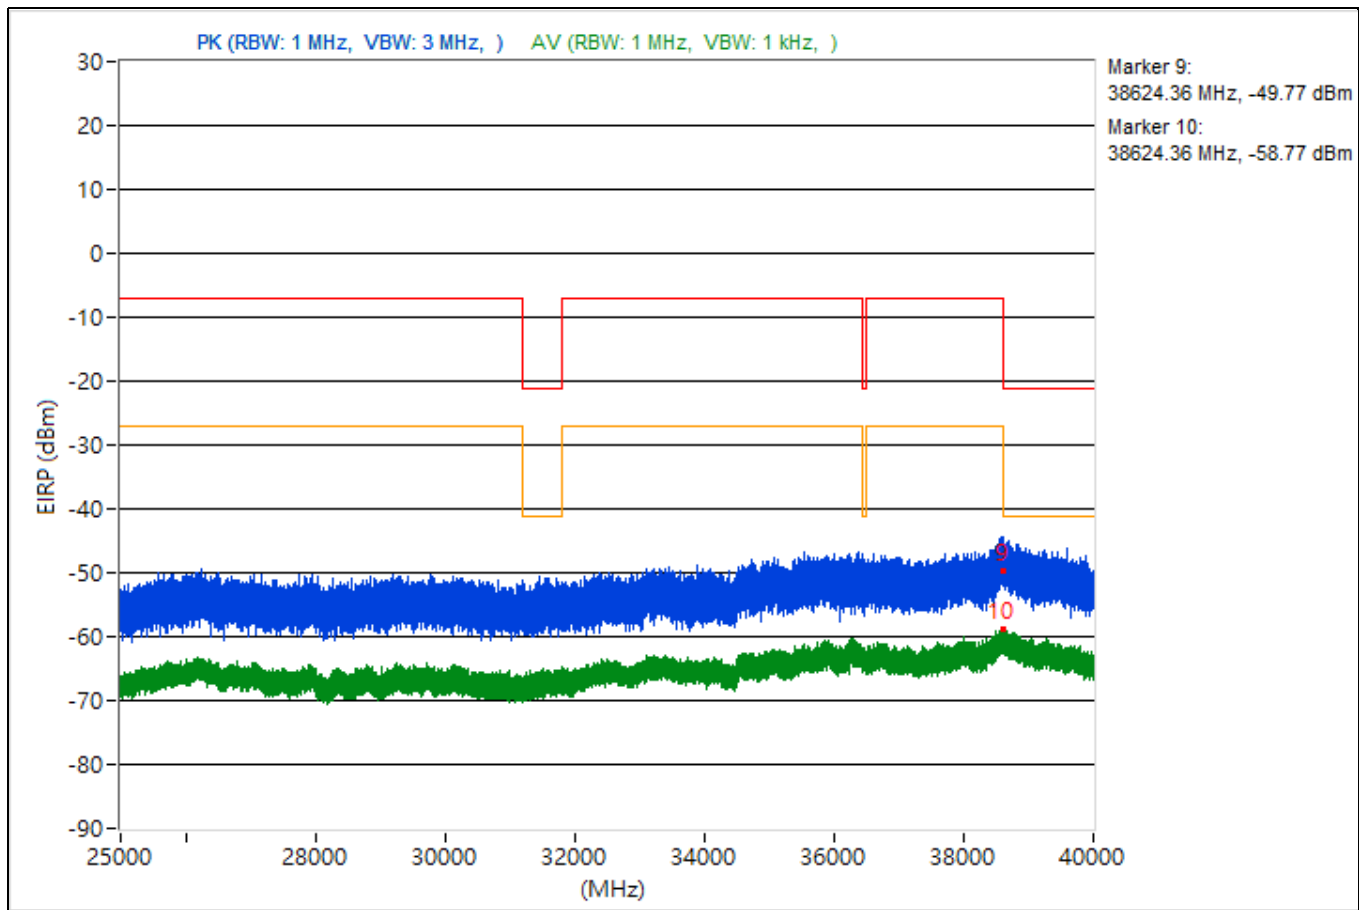


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3839.9	49.07 PK	74	-24.93	-52.95	-55.73	4.92	-46.19
2	3839.9	38.67 AV	54	-15.33	-63.21	-66.41	4.92	-56.59
3	8481.6	46.56 PK	74	-27.44	-56.92	-56.35	4.92	-48.7
4	8481.6	37.42 AV	54	-16.58	-64.99	-66.72	4.92	-57.84
5	19016.8	48.18 PK	74	-25.82	-54.67	-55.37	4.92	-47.08
6	19016.8	38.23 AV	54	-15.77	-63.51	-67.15	4.92	-57.03
7	23672.9	49.12 PK	74	-24.88	-53.11	-55.29	4.92	-46.14
8	23672.9	39.17 AV	54	-14.83	-66.14	-62.61	4.92	-56.09
9	38619.47	45.6 PK	74	-28.4	-55.97	-60.21	4.92	-49.66
10	38619.47	36.43 AV	54	-17.57	-65.42	-68.7	4.92	-58.83

Note: Margin value = Emission Level - Limit value

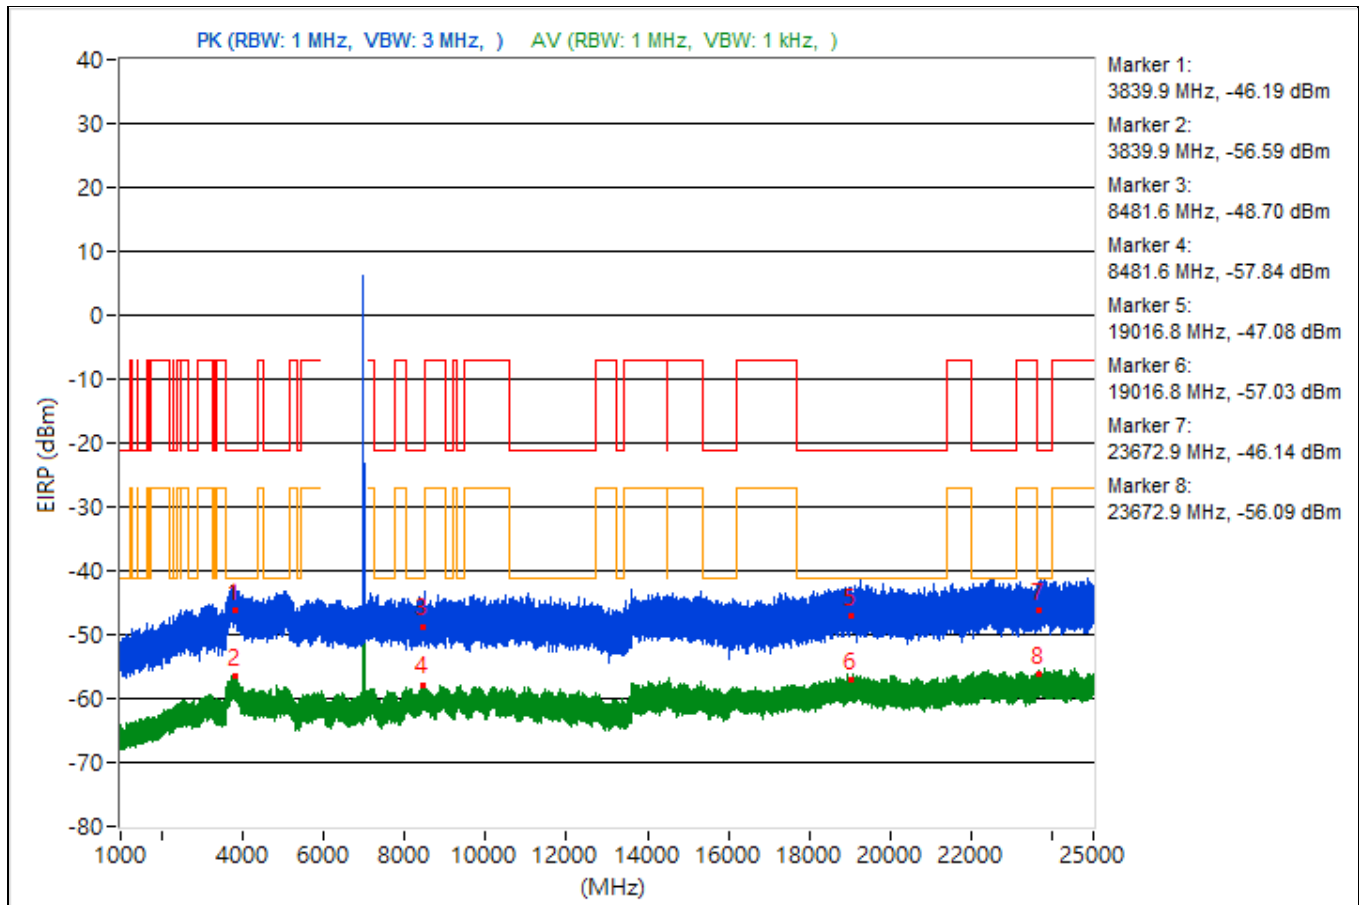


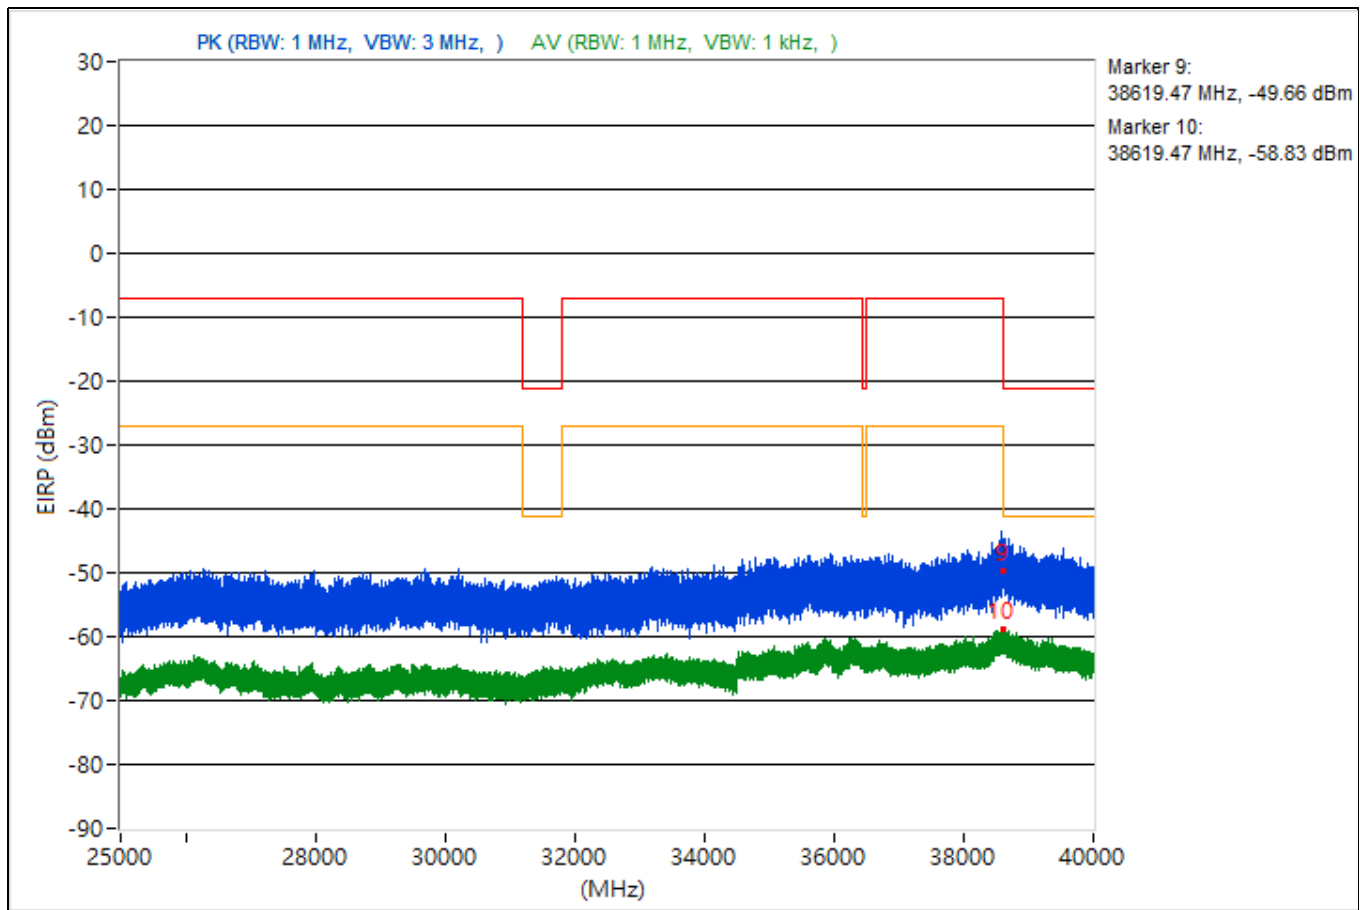


RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3756.83	50.32 PK	74	-23.68	-53.39	-52.41	4.92	-44.94
2	3756.83	38.6 AV	54	-15.4	-66.38	-63.33	4.92	-56.66
3	14475.29	47.08 PK	74	-26.92	-57.83	-54.88	4.92	-48.18
4	14475.29	37.29 AV	54	-16.71	-64.76	-67.44	4.92	-57.97
5	19482.2	49.8 PK	74	-24.2	-52.1	-55.24	4.92	-45.46
6	19482.2	38.31 AV	54	-15.69	-63.17	-67.73	4.92	-56.95
7	23616.6	48.4 PK	74	-25.6	-54.82	-54.76	4.92	-46.86
8	23616.6	39.54 AV	54	-14.46	-65.91	-62.17	4.92	-55.72
9	38605.07	45.02 PK	74	-28.98	-58.32	-58.03	4.92	-50.24
10	38605.07	36.55 AV	54	-17.45	-67.56	-65.89	4.92	-58.71

Note: Margin value = Emission Level - Limit value

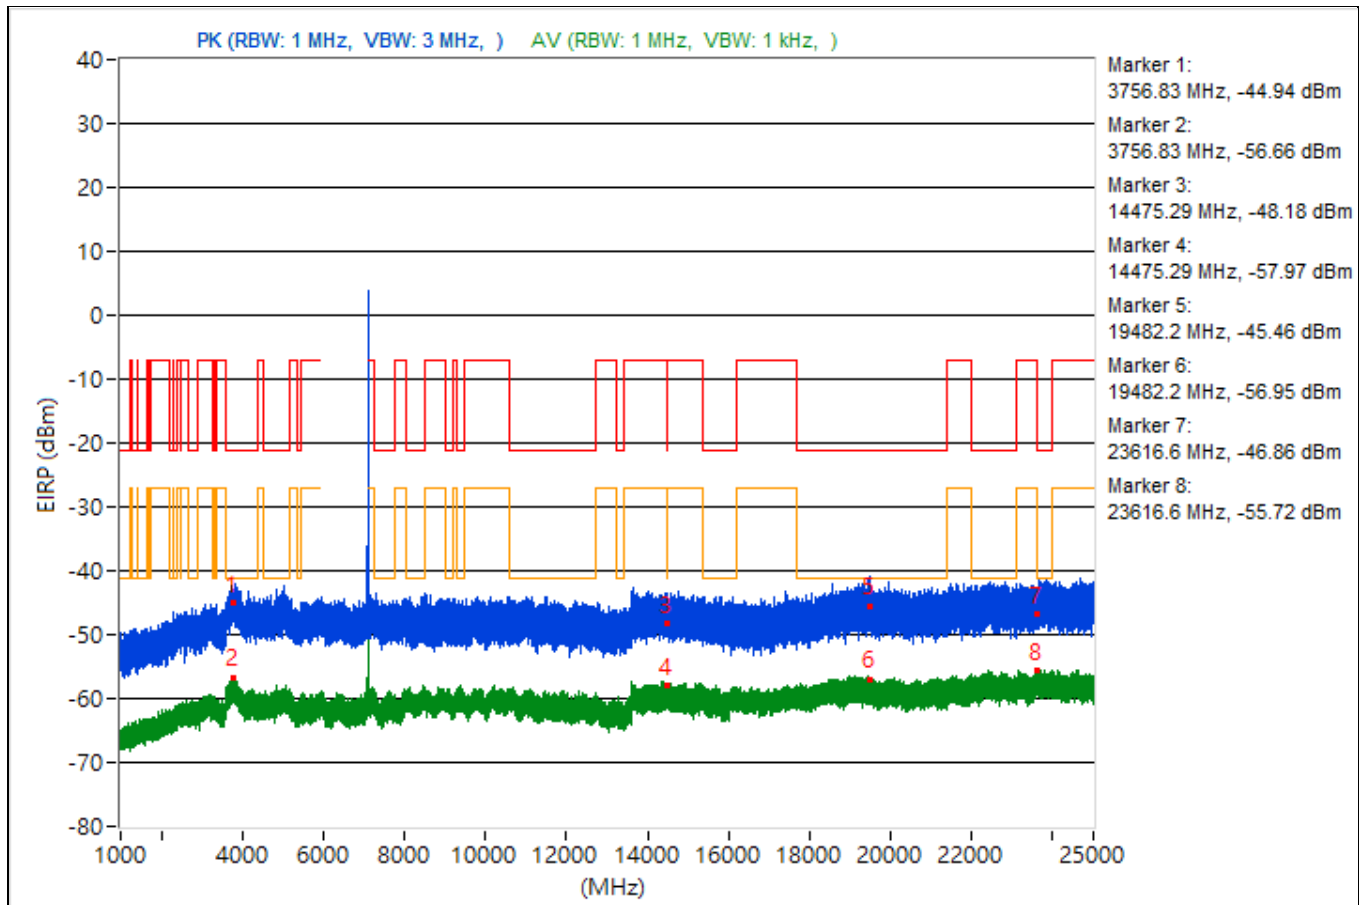


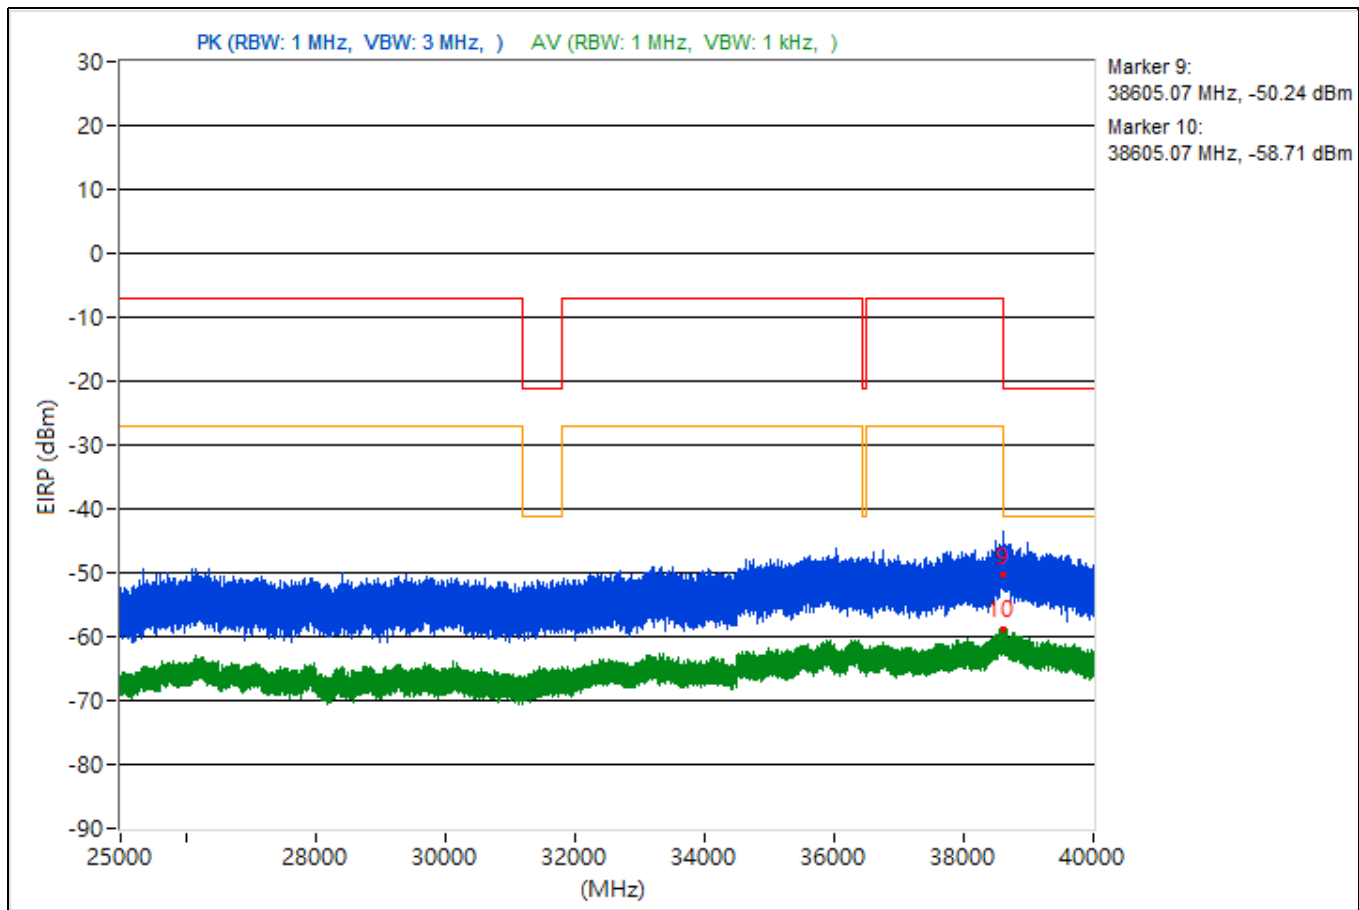


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3730.54	50.14 PK	74	-23.86	-54.57	-51.93	4.92	-45.12
2	3730.54	38.43 AV	54	-15.57	-63.74	-66.1	4.92	-56.83
3	14489.51	48.94 PK	74	-25.06	-53.6	-55.02	4.92	-46.32
4	14489.51	37.02 AV	54	-16.98	-68.52	-64.66	4.92	-58.24
5	19065.6	48.73 PK	74	-25.27	-54.81	-54.14	4.92	-46.53
6	19065.6	38.72 AV	54	-15.28	-63.17	-66.33	4.92	-56.54
7	23634	50.33 PK	74	-23.67	-51.41	-55.04	4.92	-44.93
8	23634	39.02 AV	54	-14.98	-66.97	-62.48	4.92	-56.24
9	38609.96	47.57 PK	74	-26.43	-59.4	-53.63	4.92	-47.69
10	38609.96	36.16 AV	54	-17.84	-69.39	-65.51	4.92	-59.1

Note: Margin value = Emission Level - Limit value

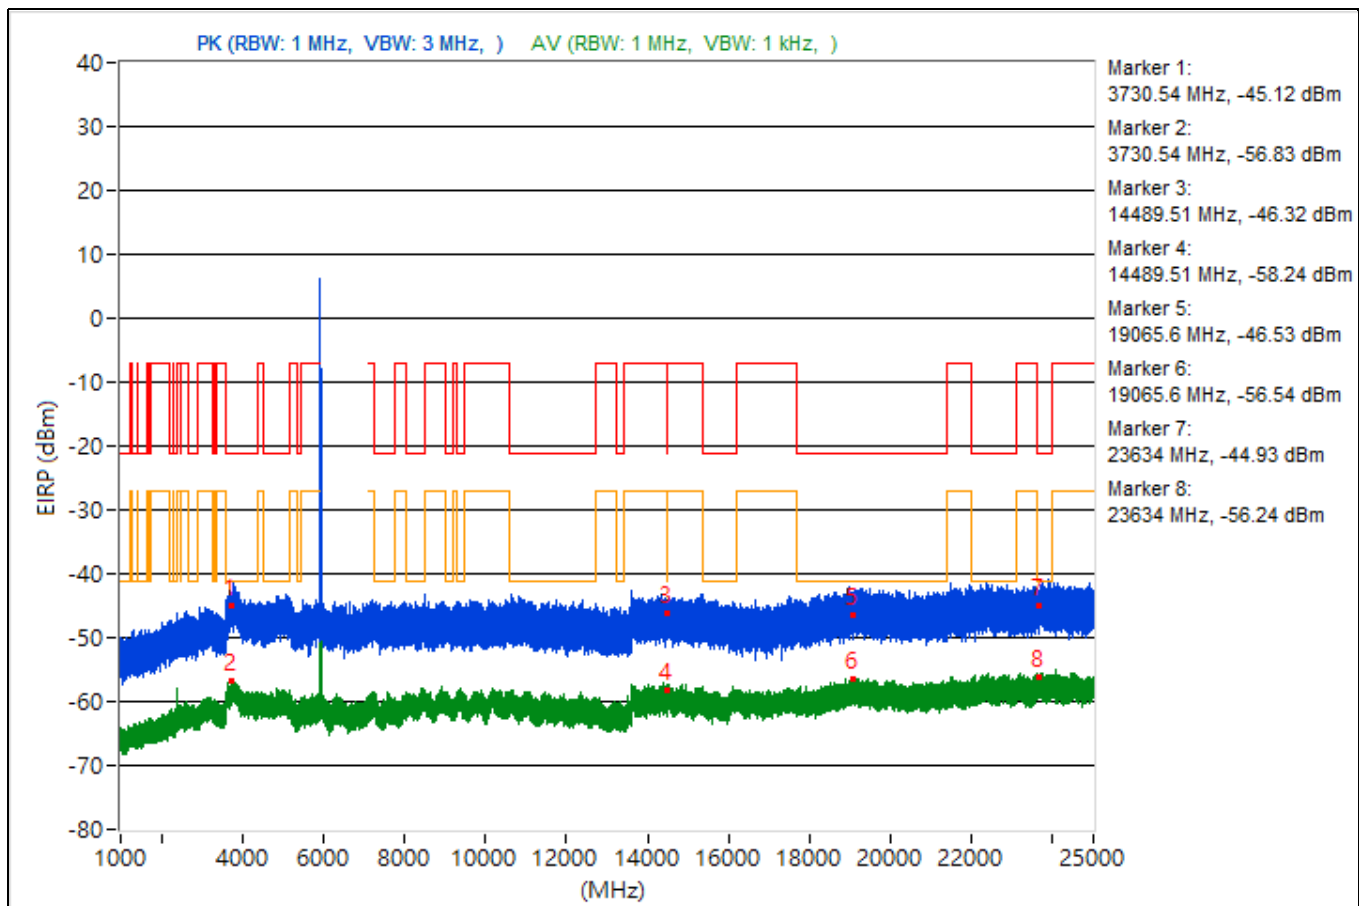


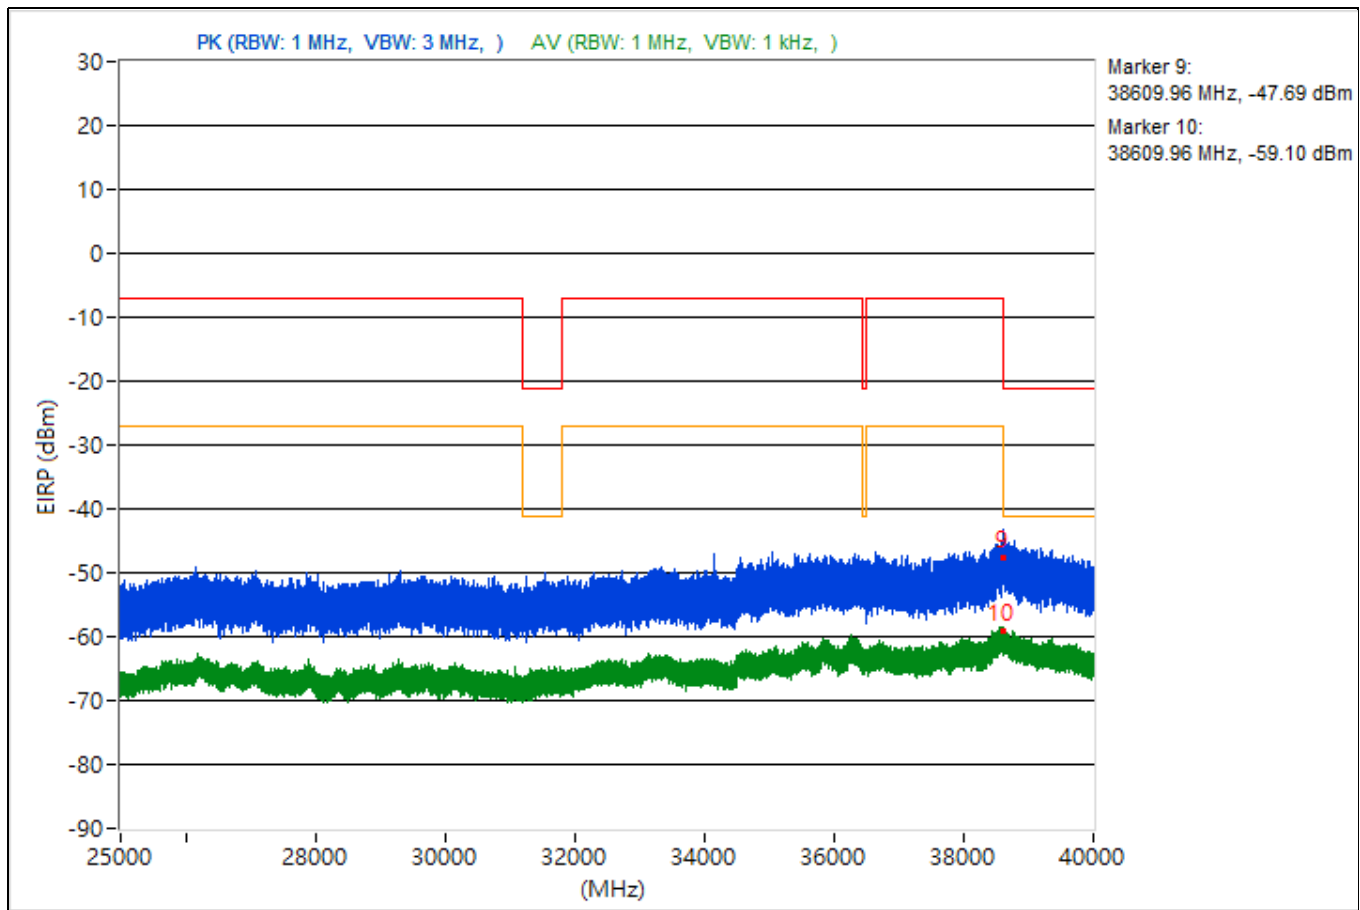


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3785.84	49.43 PK	74	-24.57	-54.54	-53.1	4.92	-45.83
2	3785.84	38.31 AV	54	-15.69	-63.63	-66.66	4.92	-56.95
3	14487.73	48.5 PK	74	-25.5	-54.59	-54.8	4.92	-46.76
4	14487.73	37.3 AV	54	-16.7	-64.58	-67.8	4.92	-57.96
5	21387.5	47.68 PK	74	-26.32	-55.71	-55.32	4.92	-47.58
6	21387.5	38.46 AV	54	-15.54	-63.01	-67.62	4.92	-56.8
7	23776	50.96 PK	74	-23.04	-52.88	-51.67	4.92	-44.3
8	23776	39.41 AV	54	-14.59	-66.72	-62.04	4.92	-55.85
9	38601.33	47.76 PK	74	-26.24	-56.2	-54.77	4.92	-47.5
10	38601.33	36.3 AV	54	-17.7	-65.15	-69.83	4.92	-58.96

Note: Margin value = Emission Level - Limit value

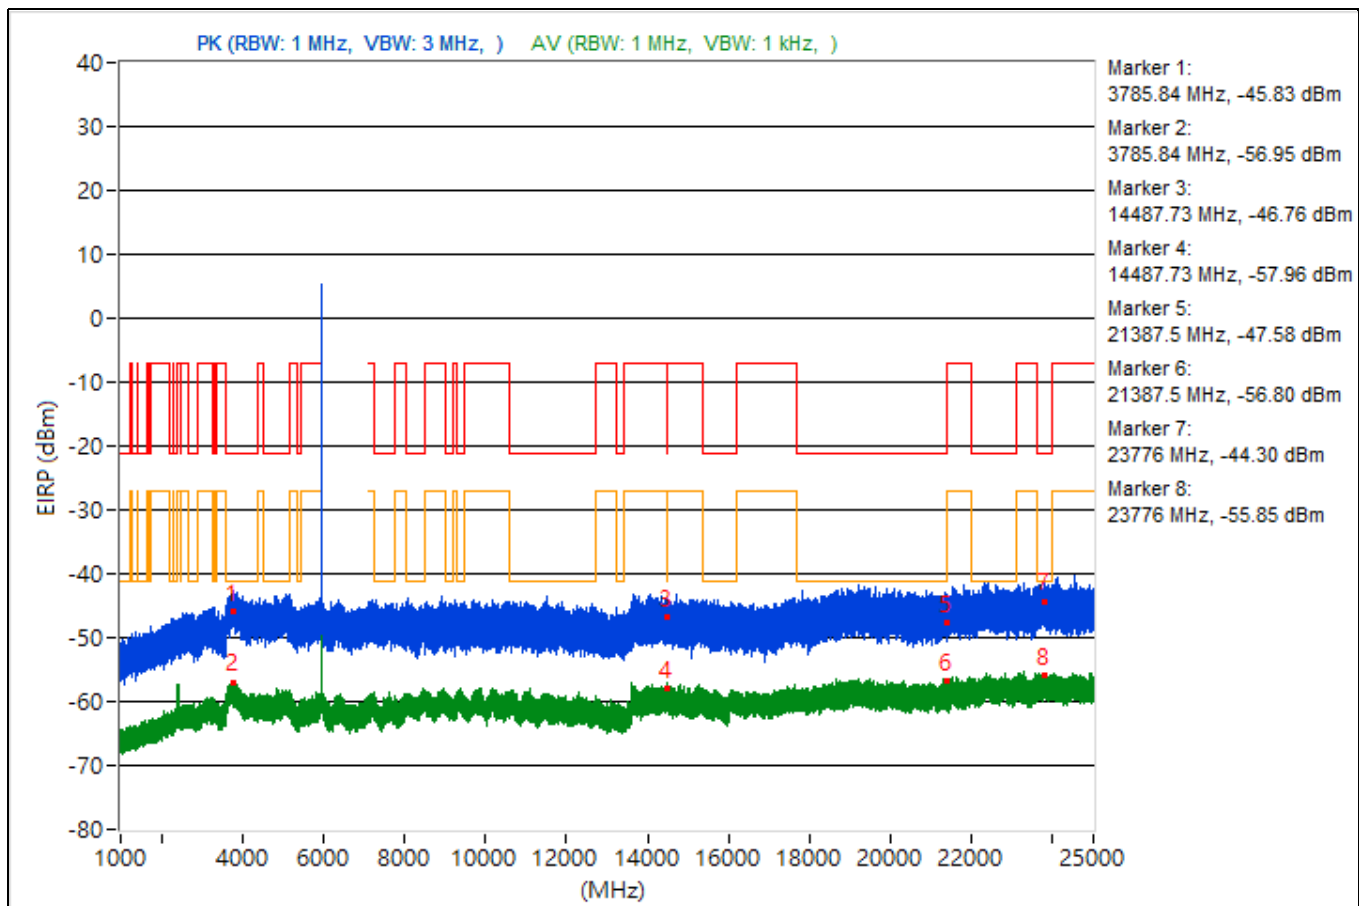


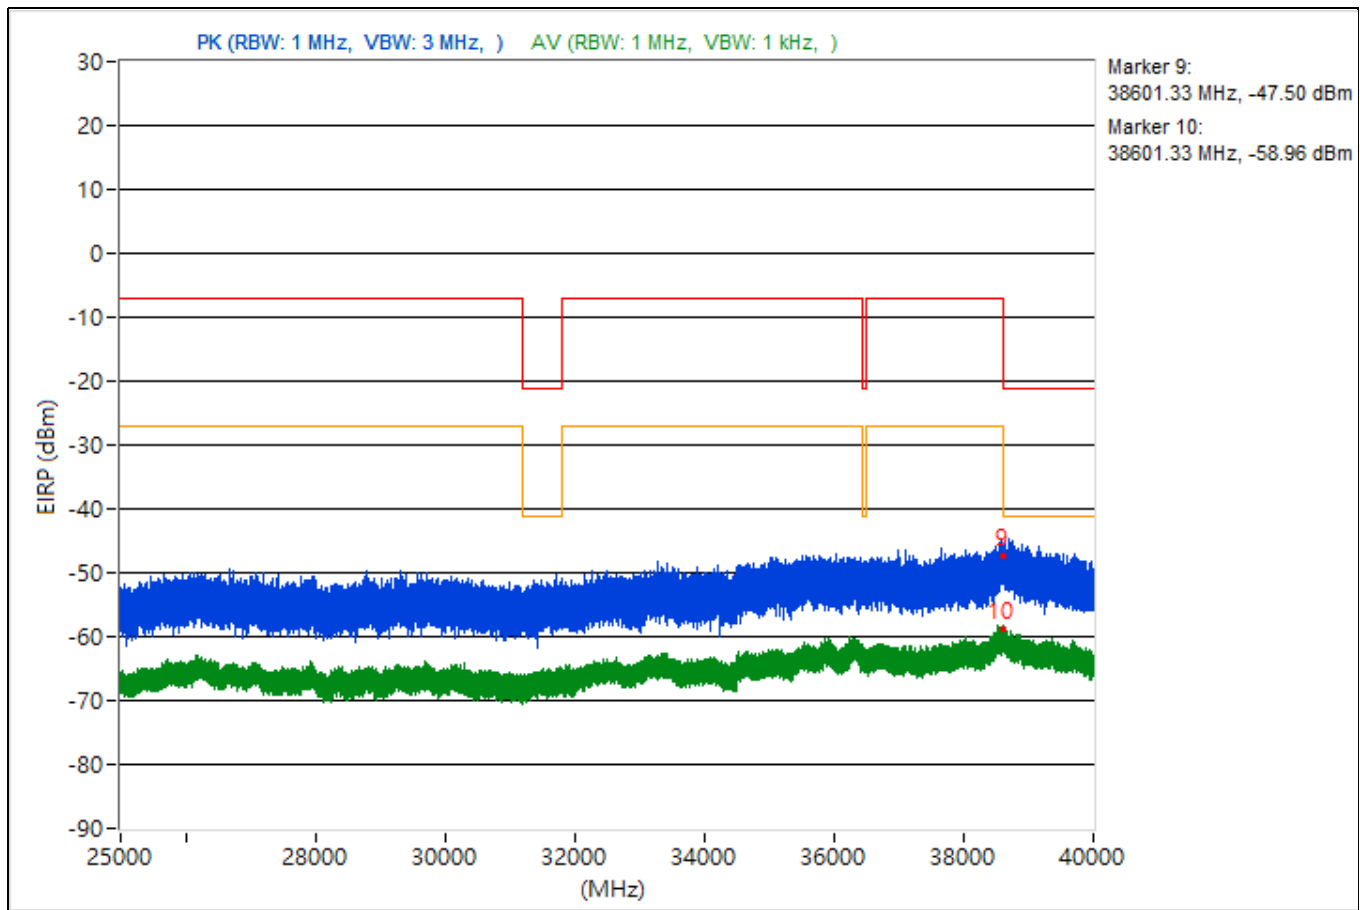


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3807.47	50.85 PK	74	-23.15	-52.84	-51.9	4.92	-44.41
2	3807.47	38.4 AV	54	-15.6	-63.82	-66.04	4.92	-56.86
3	14485.6	47.67 PK	74	-26.33	-54.11	-57.61	4.92	-47.59
4	14485.6	37.87 AV	54	-16.13	-66.93	-64.15	4.92	-57.39
5	19072.1	50.71 PK	74	-23.29	-51.8	-53.29	4.92	-44.55
6	19072.1	38.91 AV	54	-15.09	-63.45	-65.3	4.92	-56.35
7	23687.5	48.17 PK	74	-25.83	-55.67	-54.45	4.92	-47.09
8	23687.5	39.98 AV	54	-14.02	-64.54	-62.19	4.92	-55.28
9	38607.73	46.86 PK	74	-27.14	-56.35	-56.32	4.92	-48.4
10	38607.73	36.23 AV	54	-17.77	-65.79	-68.56	4.92	-59.03

Note: Margin value = Emission Level - Limit value

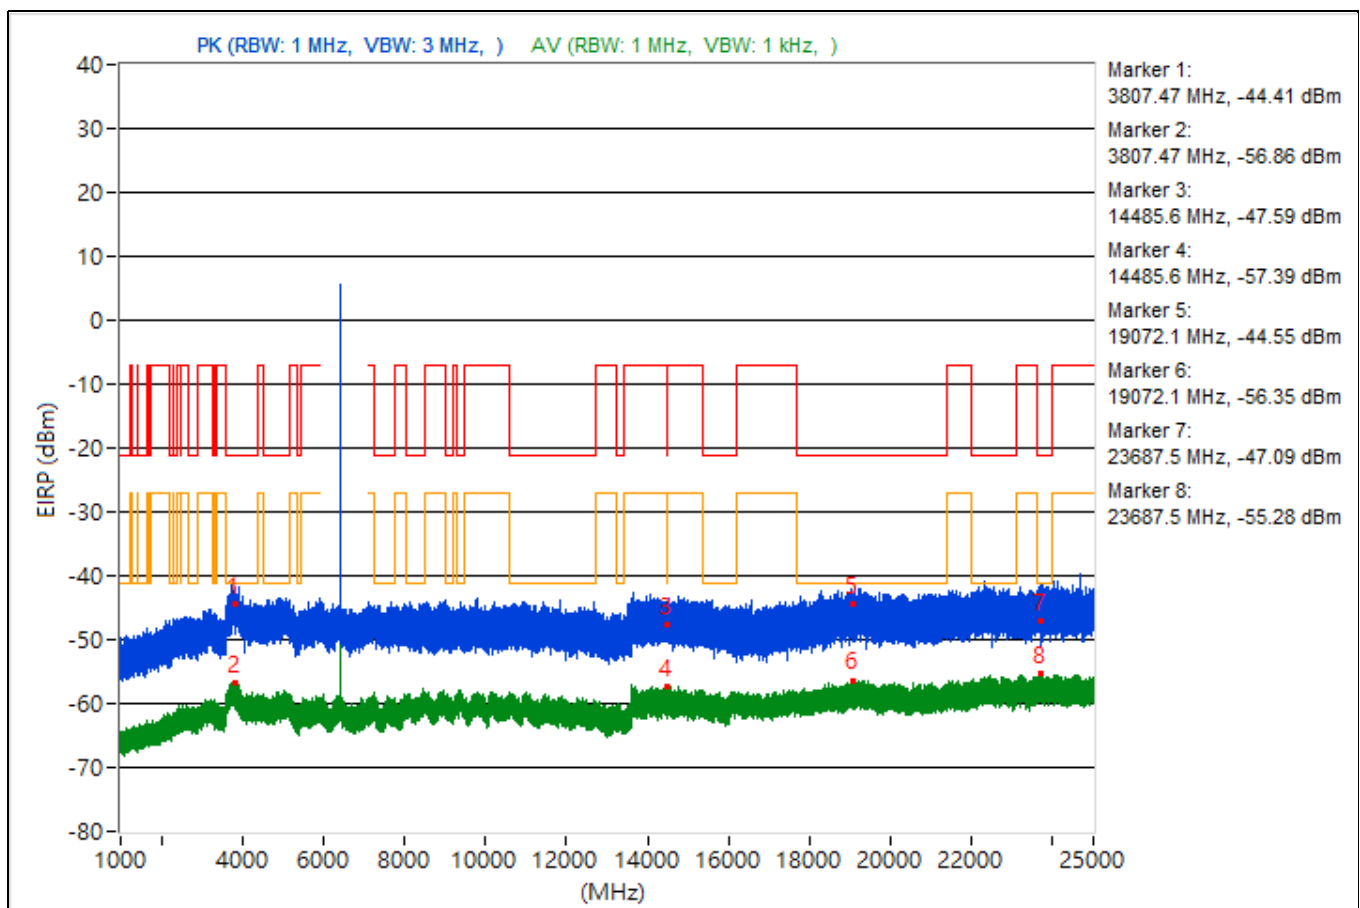


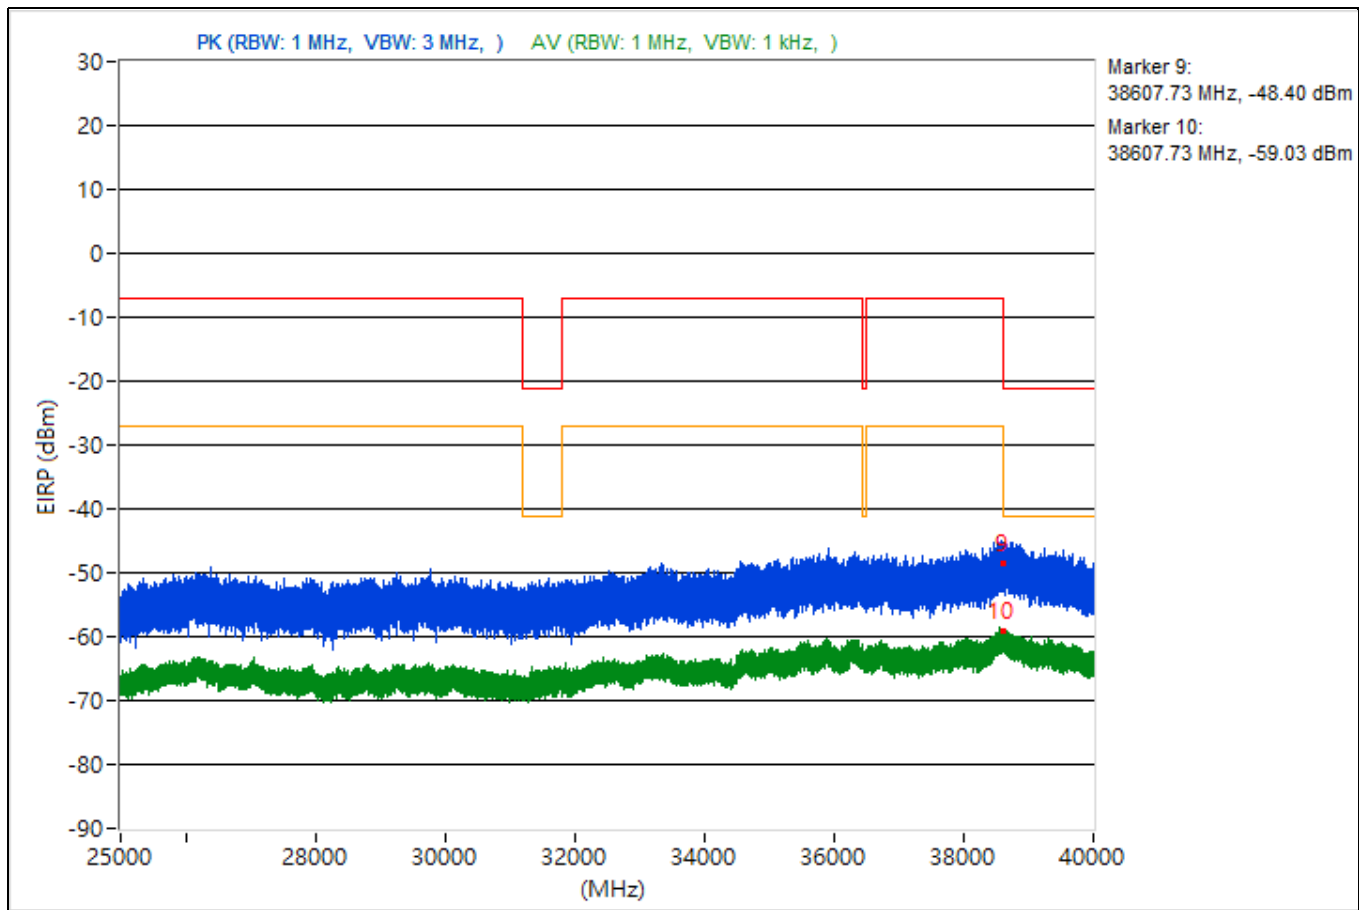


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3758.86	50.71 PK	74	-23.29	-52.19	-52.78	4.92	-44.55
2	3758.86	38.75 AV	54	-15.25	-66.16	-63.2	4.92	-56.51
3	14499.11	49.53 PK	74	-24.47	-54.31	-53.09	4.92	-45.73
4	14499.11	37.8 AV	54	-16.2	-64.08	-67.27	4.92	-57.46
5	18989.7	47.52 PK	74	-26.48	-55.9	-55.45	4.92	-47.74
6	18989.7	38.33 AV	54	-15.67	-63.52	-66.8	4.92	-56.93
7	23794.6	49.43 PK	74	-24.57	-53.06	-54.6	4.92	-45.83
8	23794.6	39.76 AV	54	-14.24	-65.17	-62.2	4.92	-55.5
9	38651.11	45.74 PK	74	-28.26	-56.41	-58.82	4.92	-49.52
10	38651.11	35.83 AV	54	-18.17	-69.36	-65.99	4.92	-59.43

Note: Margin value = Emission Level - Limit value

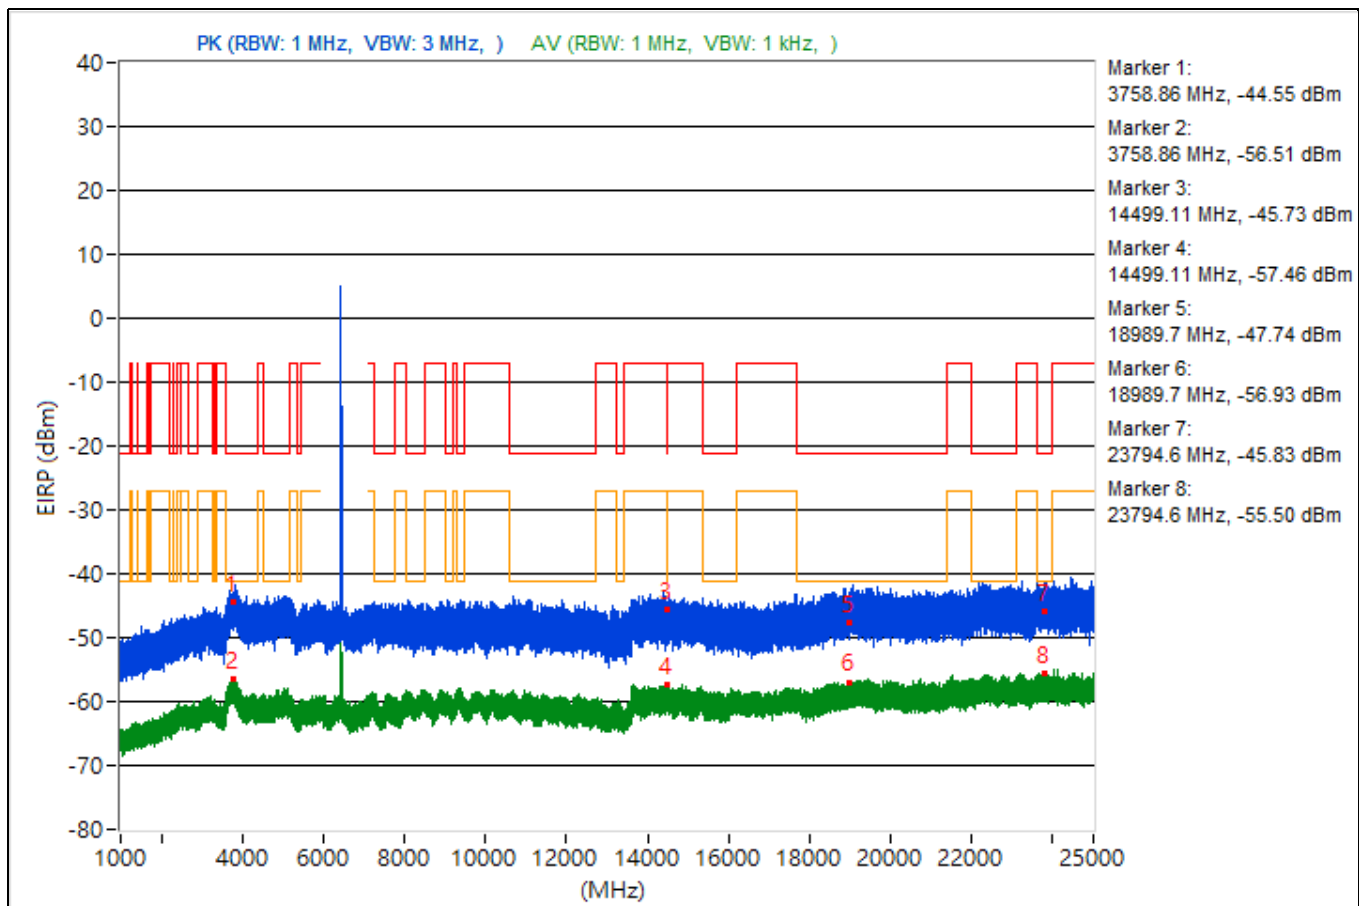


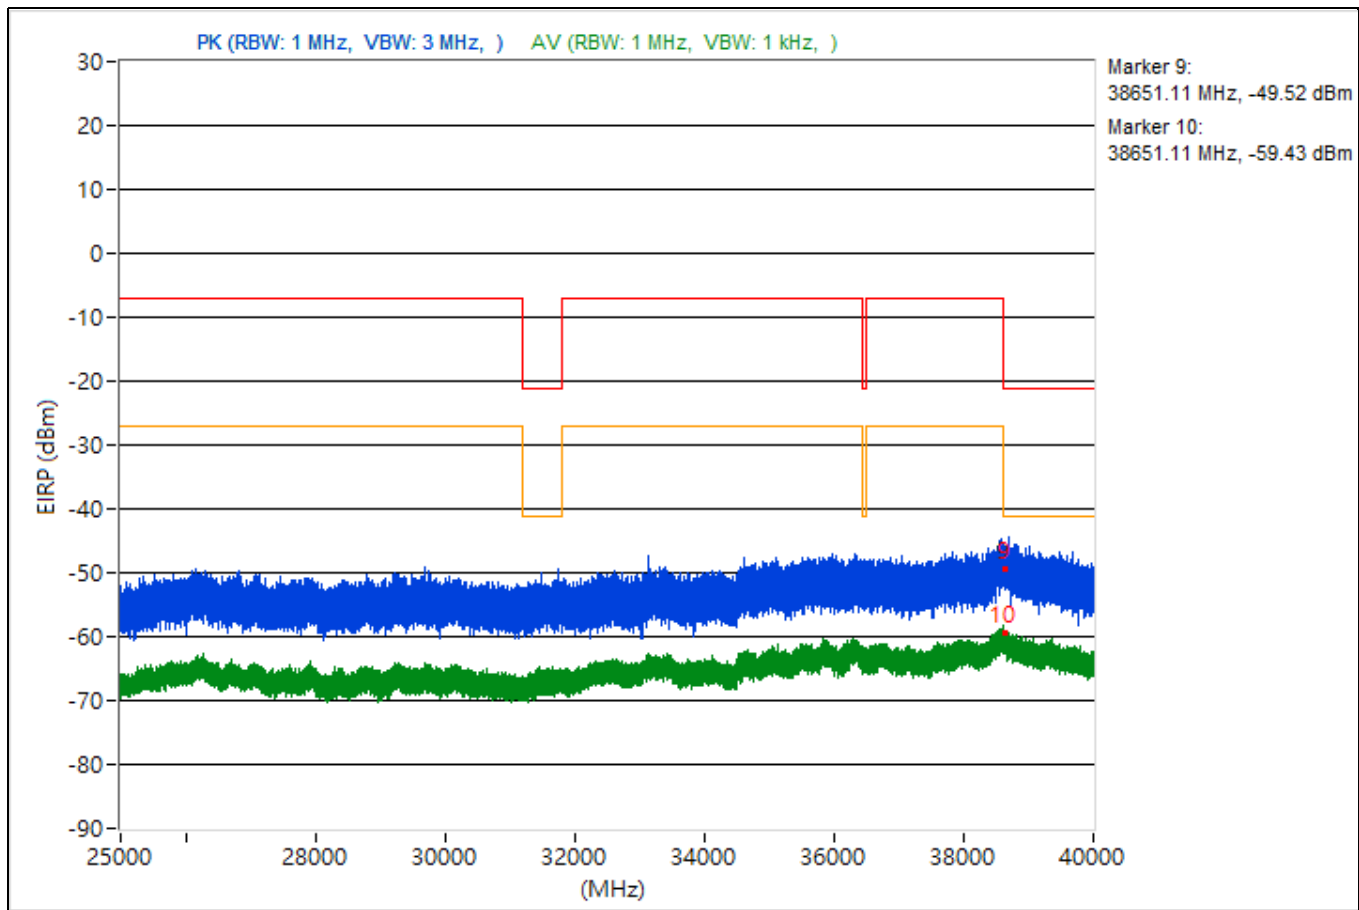


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3804.98	49.27 PK	74	-24.73	-53.9	-53.94	4.92	-45.99
2	3804.98	38.49 AV	54	-15.51	-66.46	-63.46	4.92	-56.77
3	15592.53	45.57 PK	74	-28.43	-57.1	-58.22	4.92	-49.69
4	15592.53	37.12 AV	54	-16.88	-64.93	-67.64	4.92	-58.14
5	19061.7	50.48 PK	74	-23.52	-51.07	-55.38	4.92	-44.78
6	19061.7	38.61 AV	54	-15.39	-67.12	-63	4.92	-56.65
7	22340.3	49.68 PK	74	-24.32	-52.37	-55.07	4.92	-45.58
8	22340.3	39.68 AV	54	-14.32	-62.64	-64.61	4.92	-55.58
9	38629.69	45.85 PK	74	-28.15	-59.52	-55.89	4.92	-49.41
10	38629.69	36.07 AV	54	-17.93	-66.02	-68.59	4.92	-59.19

Note: Margin value = Emission Level - Limit value

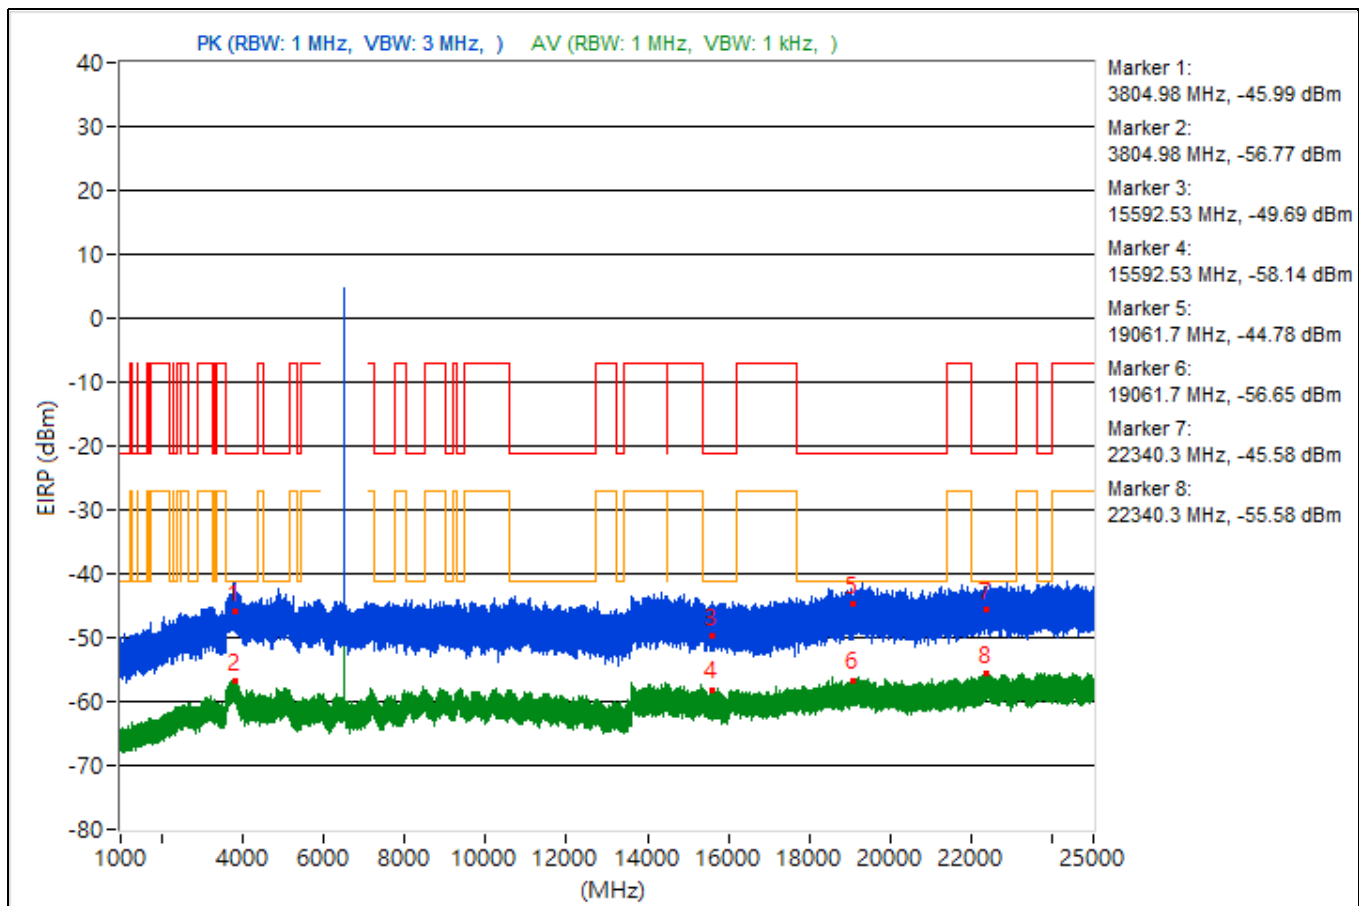


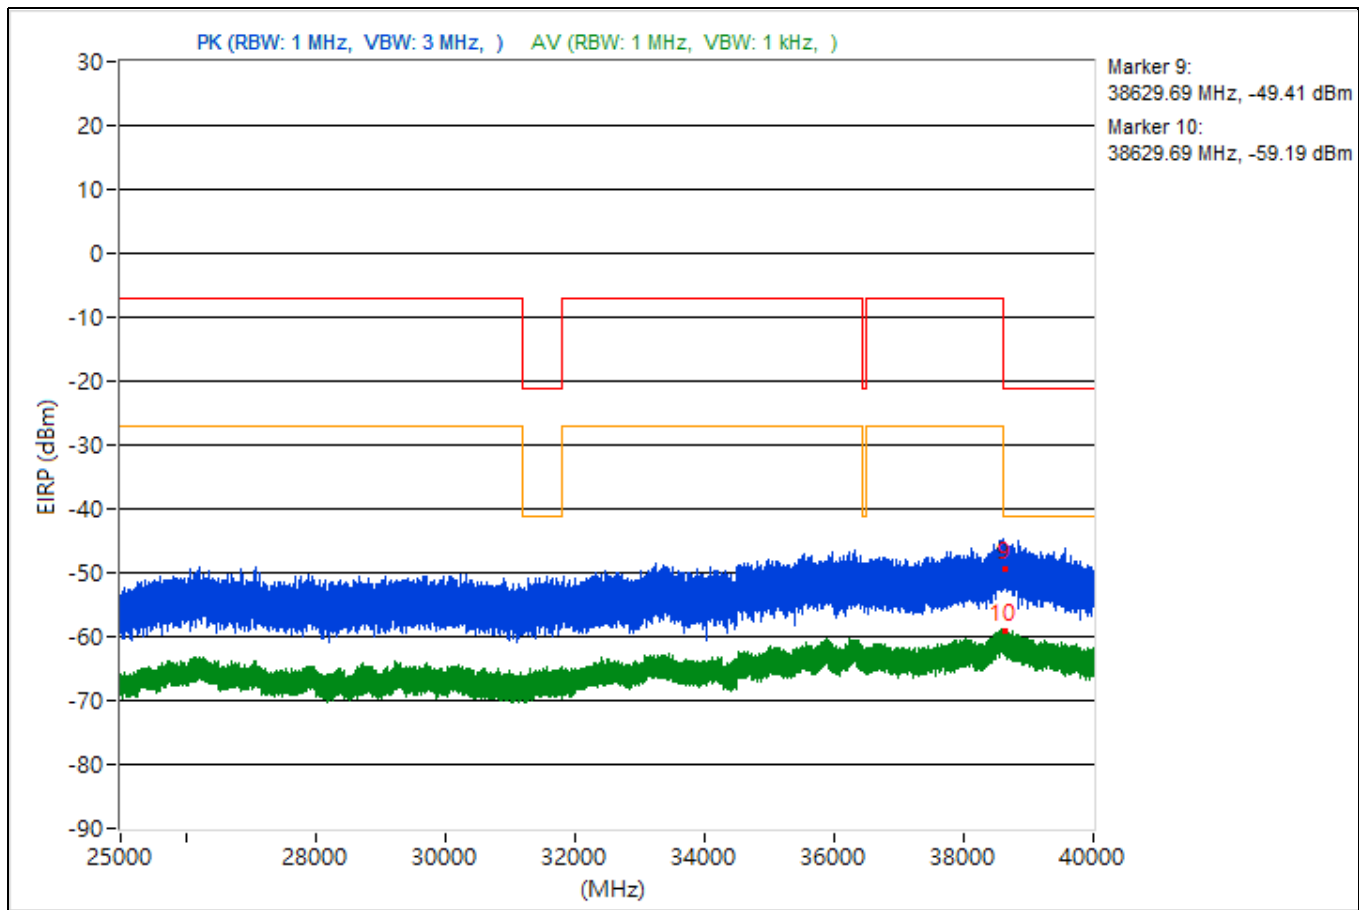


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3783.9	49.27 PK	74	-24.73	-52.9	-55.26	4.92	-45.99
2	3783.9	38.42 AV	54	-15.58	-63.22	-67.19	4.92	-56.84
3	14473.33	47.4 PK	74	-26.6	-54.34	-57.96	4.92	-47.86
4	14473.33	37.4 AV	54	-16.6	-65.08	-66.63	4.92	-57.86
5	19199.5	48.2 PK	74	-25.8	-53.69	-56.84	4.92	-47.06
6	19199.5	38.58 AV	54	-15.42	-66.4	-63.35	4.92	-56.68
7	23679.6	50.59 PK	74	-23.41	-53.33	-51.98	4.92	-44.67
8	23679.6	39.49 AV	54	-14.51	-62.42	-65.53	4.92	-55.77
9	38644.44	49.63 PK	74	-24.37	-57.92	-51.43	4.92	-45.63
10	38644.44	36.08 AV	54	-17.92	-70.35	-65.28	4.92	-59.18

Note: Margin value = Emission Level - Limit value

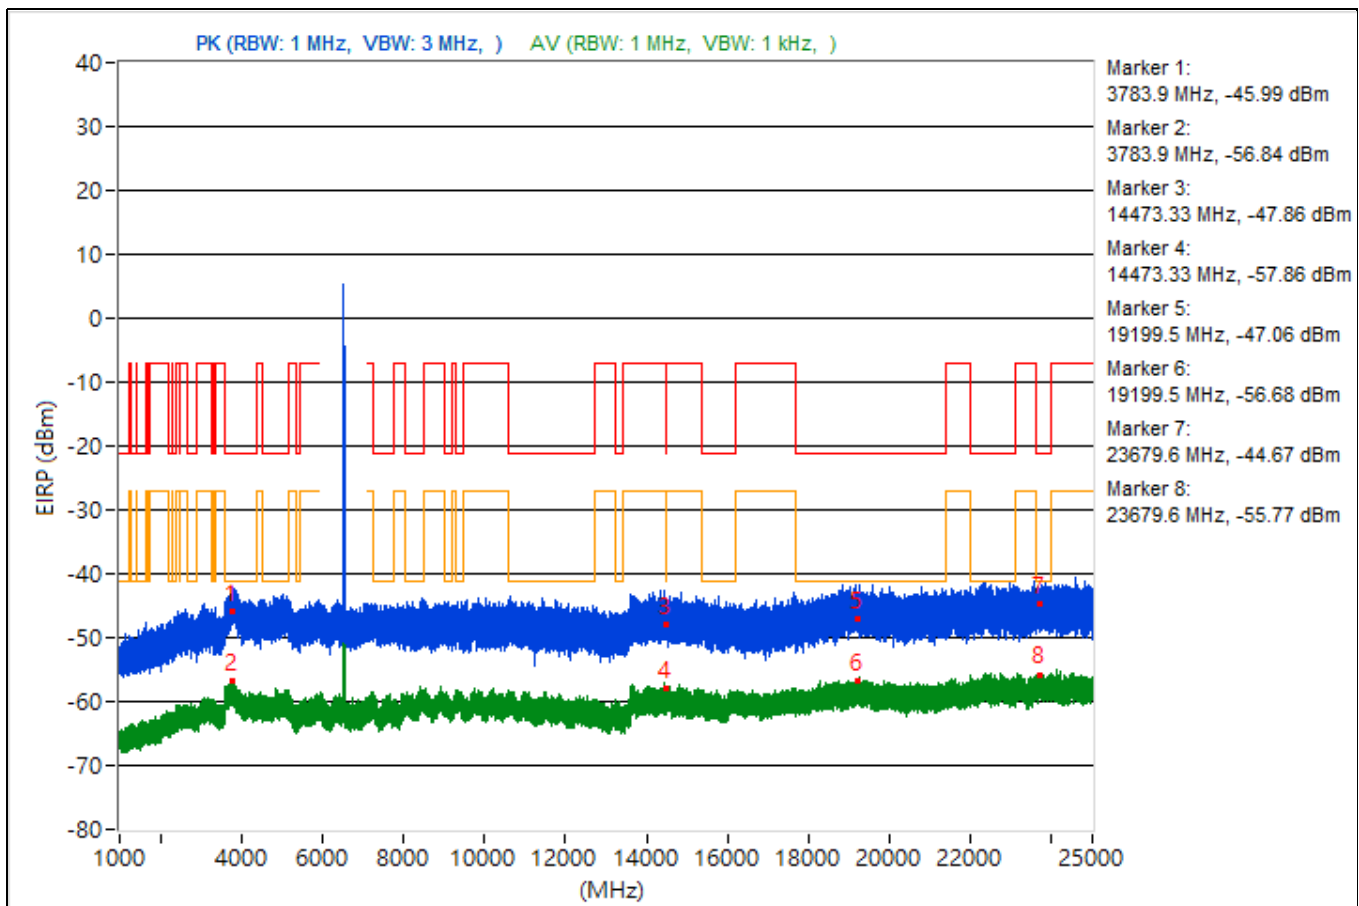


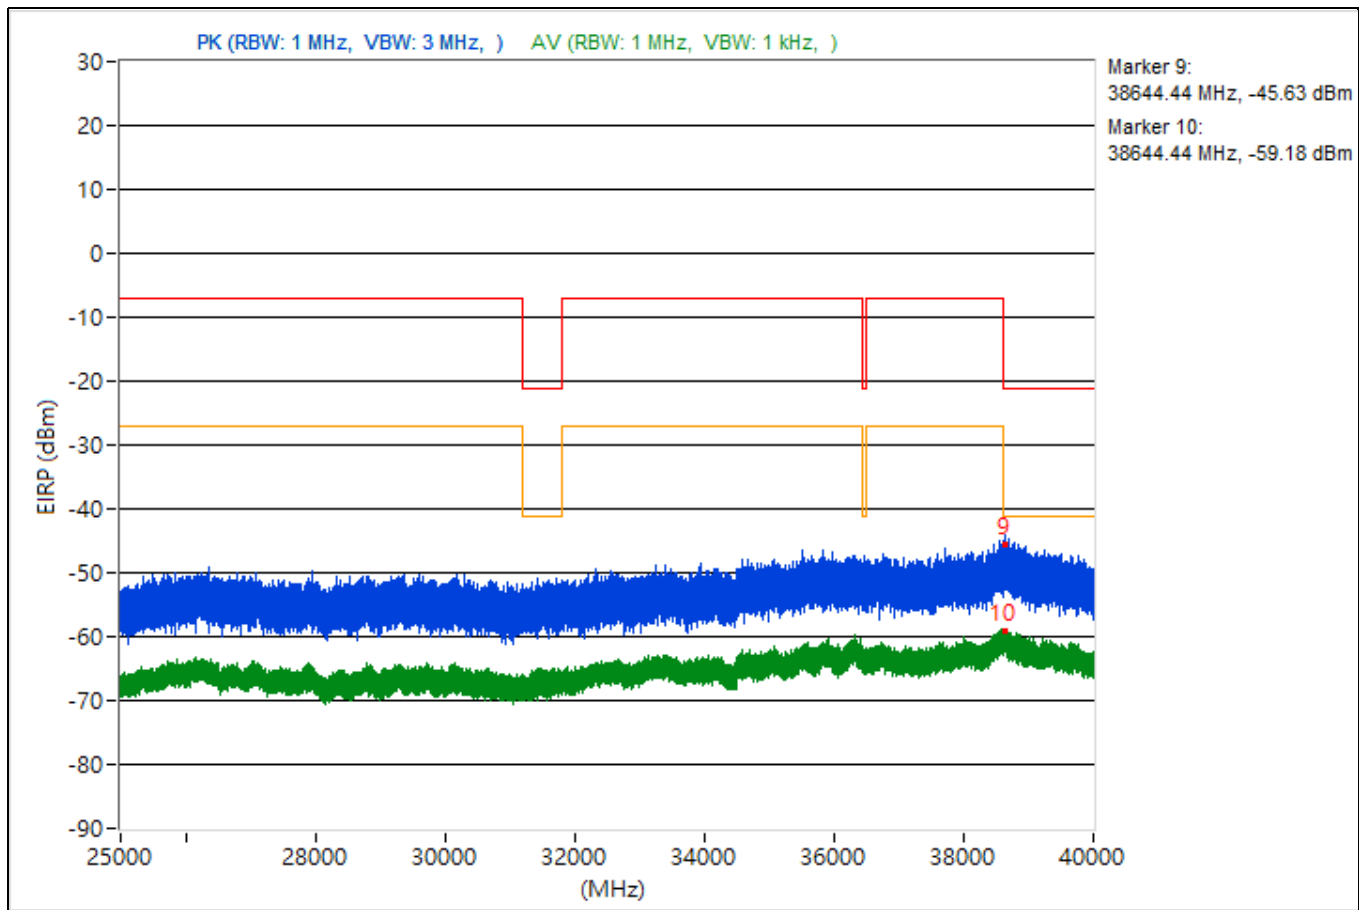


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3786.93	49.05 PK	74	-24.95	-54.17	-54.11	4.92	-46.21
2	3786.93	38.15 AV	54	-15.85	-67.46	-63.49	4.92	-57.11
3	14473.78	49.89 PK	74	-24.11	-52.79	-53.87	4.92	-45.37
4	14473.78	37.23 AV	54	-16.77	-67.48	-64.83	4.92	-58.03
5	19223.6	48.55 PK	74	-25.45	-57.39	-52.97	4.92	-46.71
6	19223.6	38.65 AV	54	-15.35	-63.16	-66.56	4.92	-56.61
7	22304.9	50.8 PK	74	-23.2	-52.62	-52.17	4.92	-44.46
8	22304.9	39.72 AV	54	-14.28	-65.75	-61.99	4.92	-55.54
9	38607.2	47.08 PK	74	-26.92	-54.88	-57.85	4.92	-48.18
10	38607.2	35.7 AV	54	-18.3	-66.03	-69.71	4.92	-59.56

Note: Margin value = Emission Level - Limit value

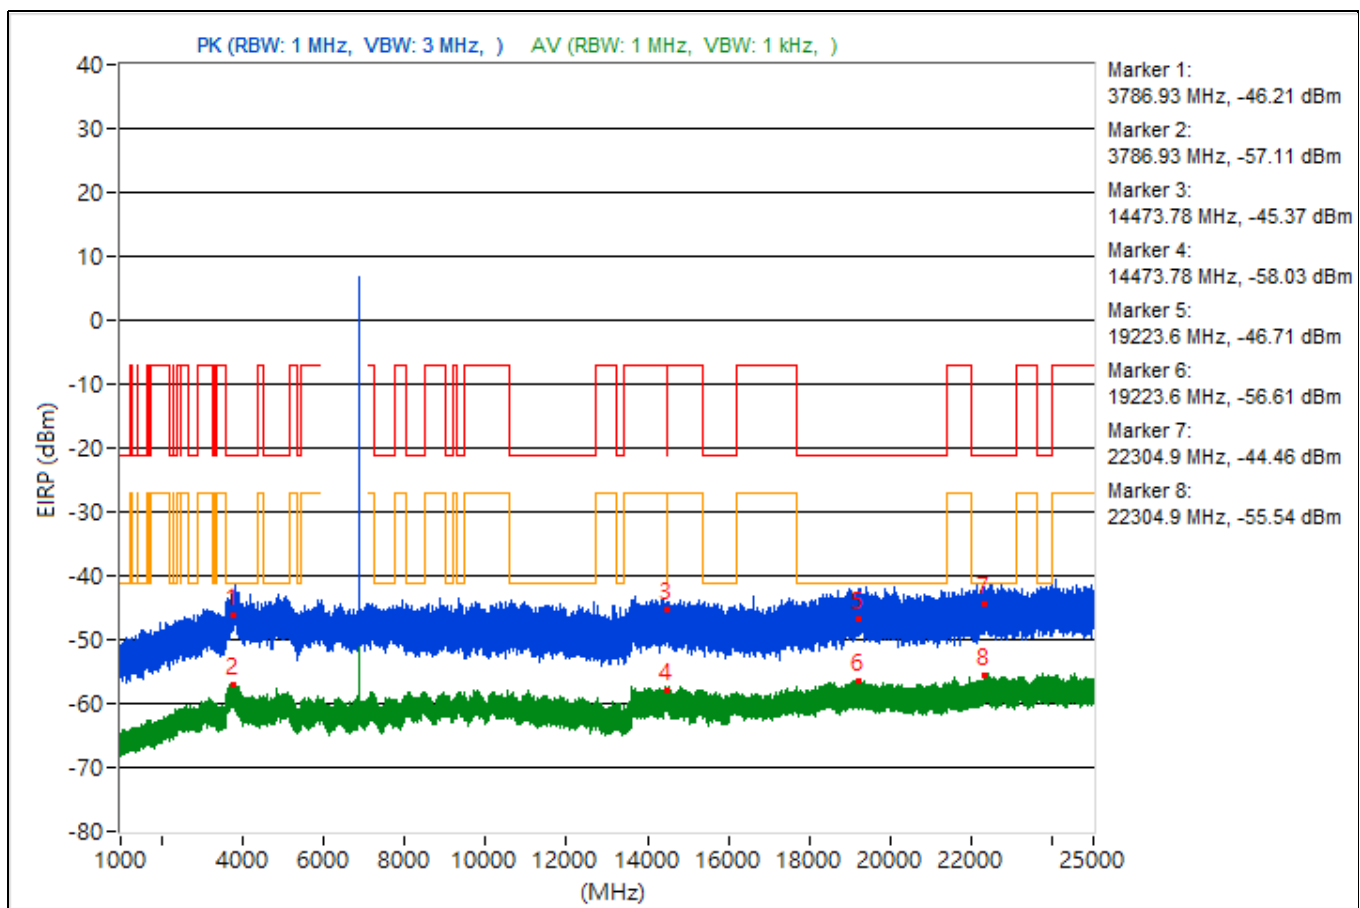


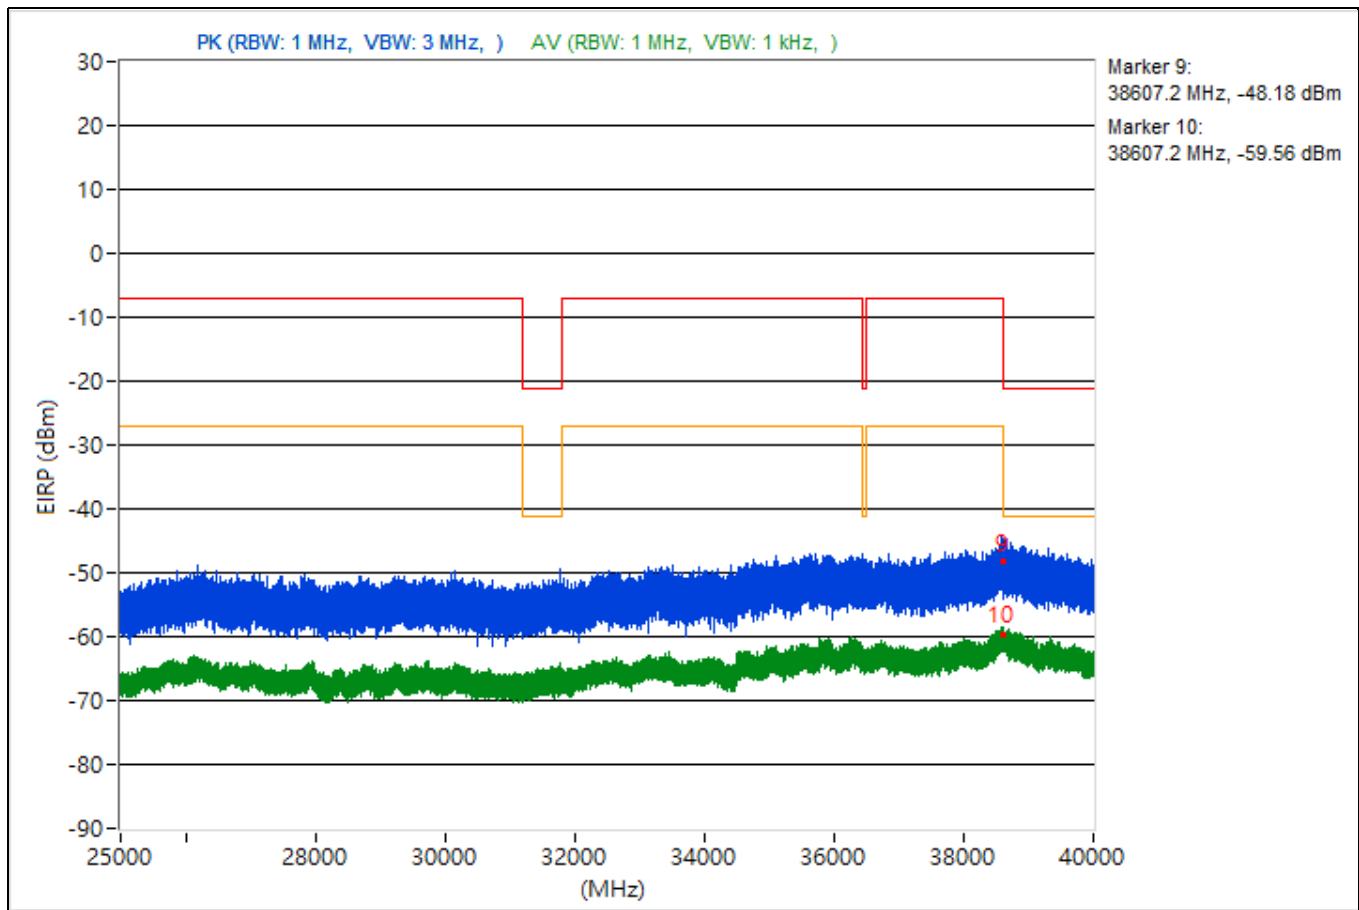


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3765.39	50.03 PK	74	-23.97	-53.5	-52.84	4.92	-45.23
2	3765.39	38.17 AV	54	-15.83	-66.2	-64.09	4.92	-57.09
3	14484.18	47.1 PK	74	-26.9	-55.23	-57.15	4.92	-48.16
4	14484.18	37.62 AV	54	-16.38	-64.67	-66.71	4.92	-57.64
5	19111.5	51.36 PK	74	-22.64	-53.67	-50.55	4.92	-43.9
6	19111.5	38.37 AV	54	-15.63	-63.22	-67.4	4.92	-56.89
7	23825.9	51.89 PK	74	-22.11	-53.31	-49.93	4.92	-43.37
8	23825.9	39.38 AV	54	-14.62	-66.07	-62.33	4.92	-55.88
9	38645.51	46.69 PK	74	-27.31	-55.8	-57.34	4.92	-48.57
10	38645.51	36.27 AV	54	-17.73	-66.1	-67.93	4.92	-58.99

Note: Margin value = Emission Level - Limit value

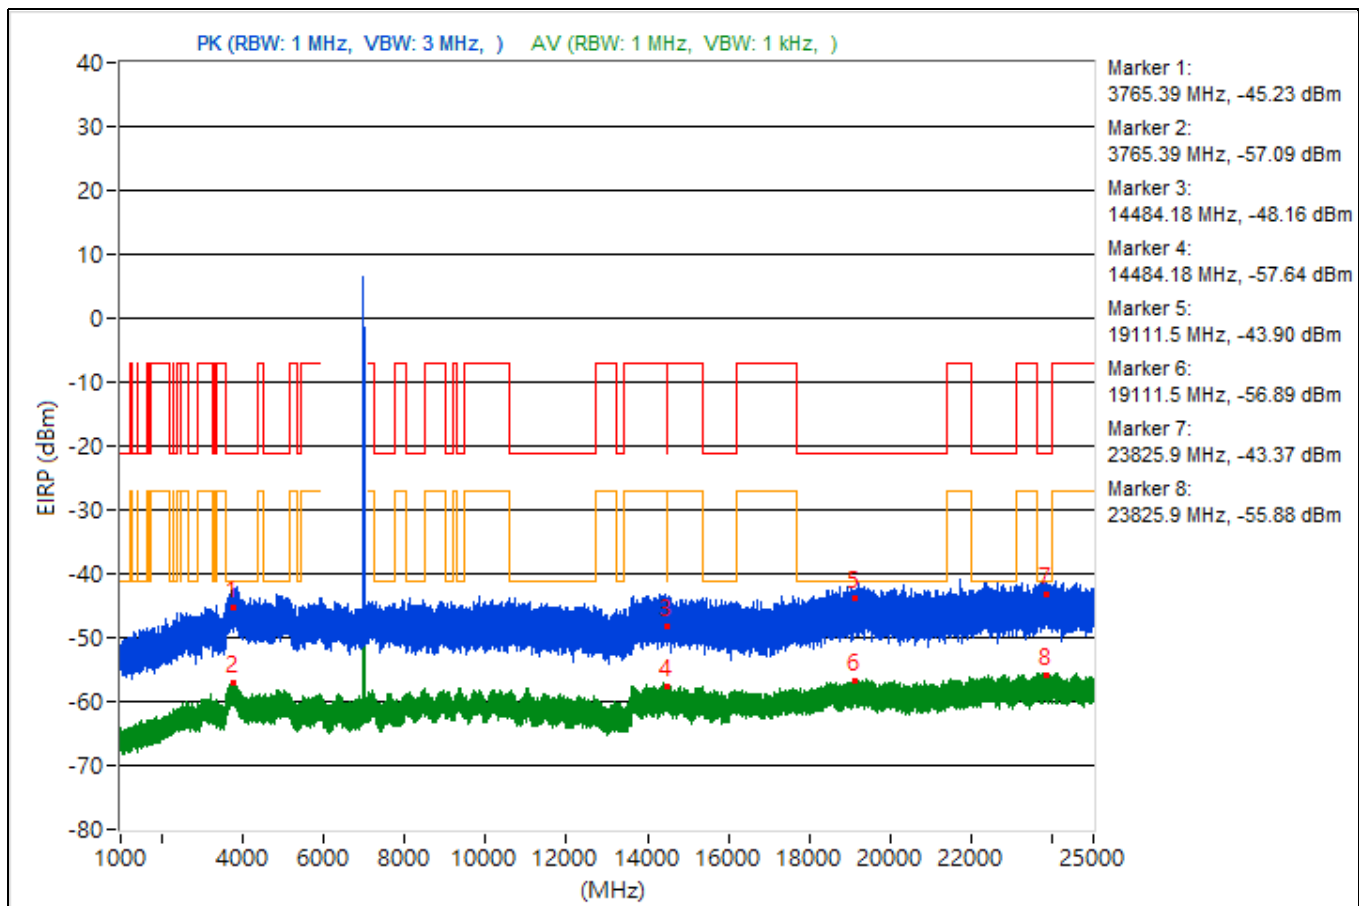


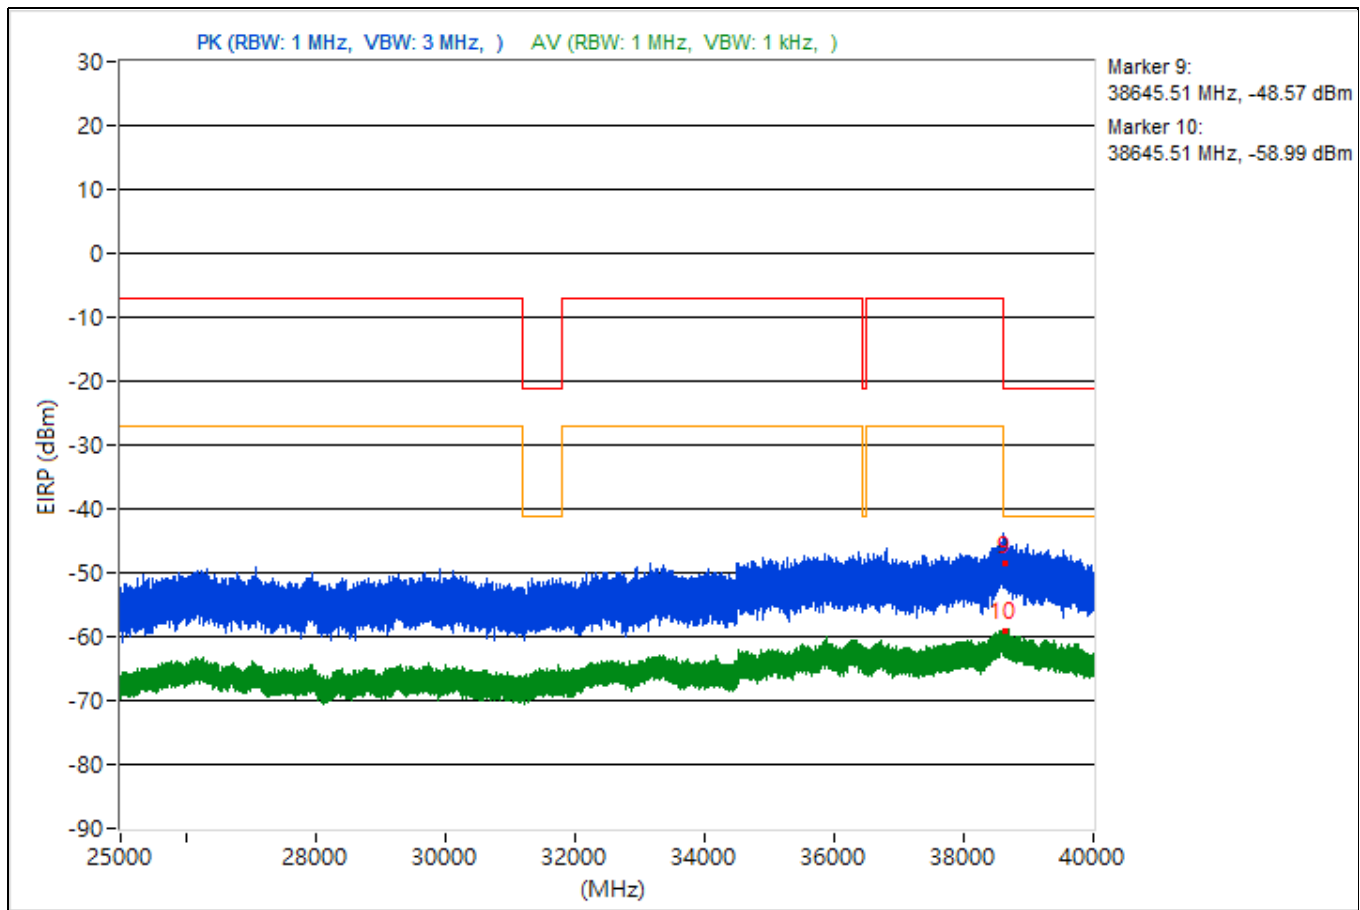


RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3771.77	50.97 PK	74	-23.03	-50.86	-54.21	4.92	-44.29
2	3771.77	38.16 AV	54	-15.84	-64.26	-65.98	4.92	-57.1
3	14482.76	48.74 PK	74	-25.26	-53.02	-56.59	4.92	-46.52
4	14482.76	37.41 AV	54	-16.59	-67.33	-64.64	4.92	-57.85
5	21326.3	47.3 PK	74	-26.7	-58.47	-54.29	4.92	-47.96
6	21326.3	38.8 AV	54	-15.2	-65.74	-63.36	4.92	-56.46
7	23715.8	52.17 PK	74	-21.83	-54.59	-49.09	4.92	-43.09
8	23715.8	39.46 AV	54	-14.54	-62.27	-65.95	4.92	-55.8
9	38682.67	44.7 PK	74	-29.3	-60.99	-56.92	4.92	-50.56
10	38682.67	35.85 AV	54	-18.15	-68.88	-66.21	4.92	-59.41

Note: Margin value = Emission Level - Limit value

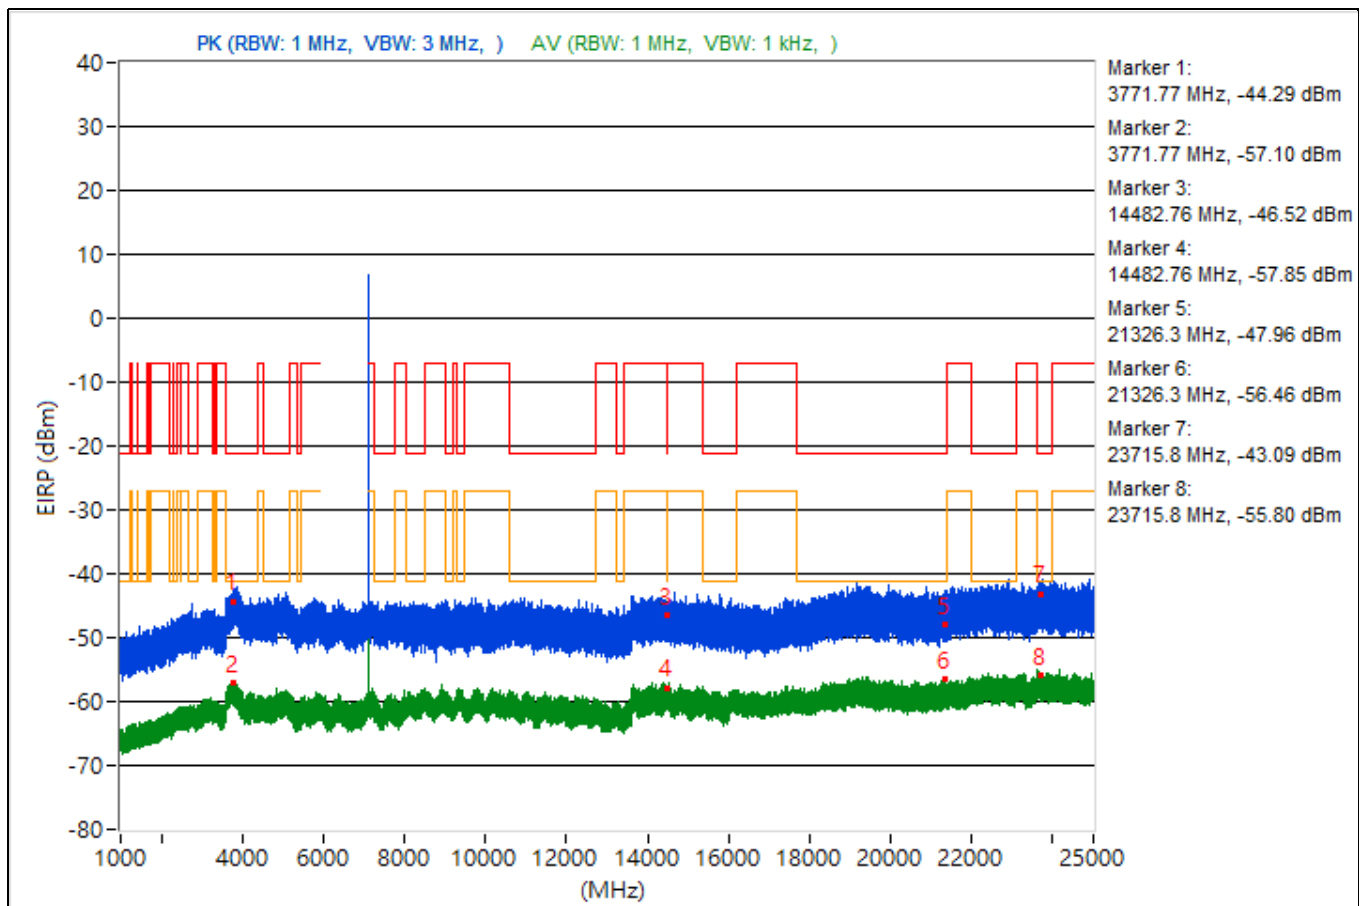


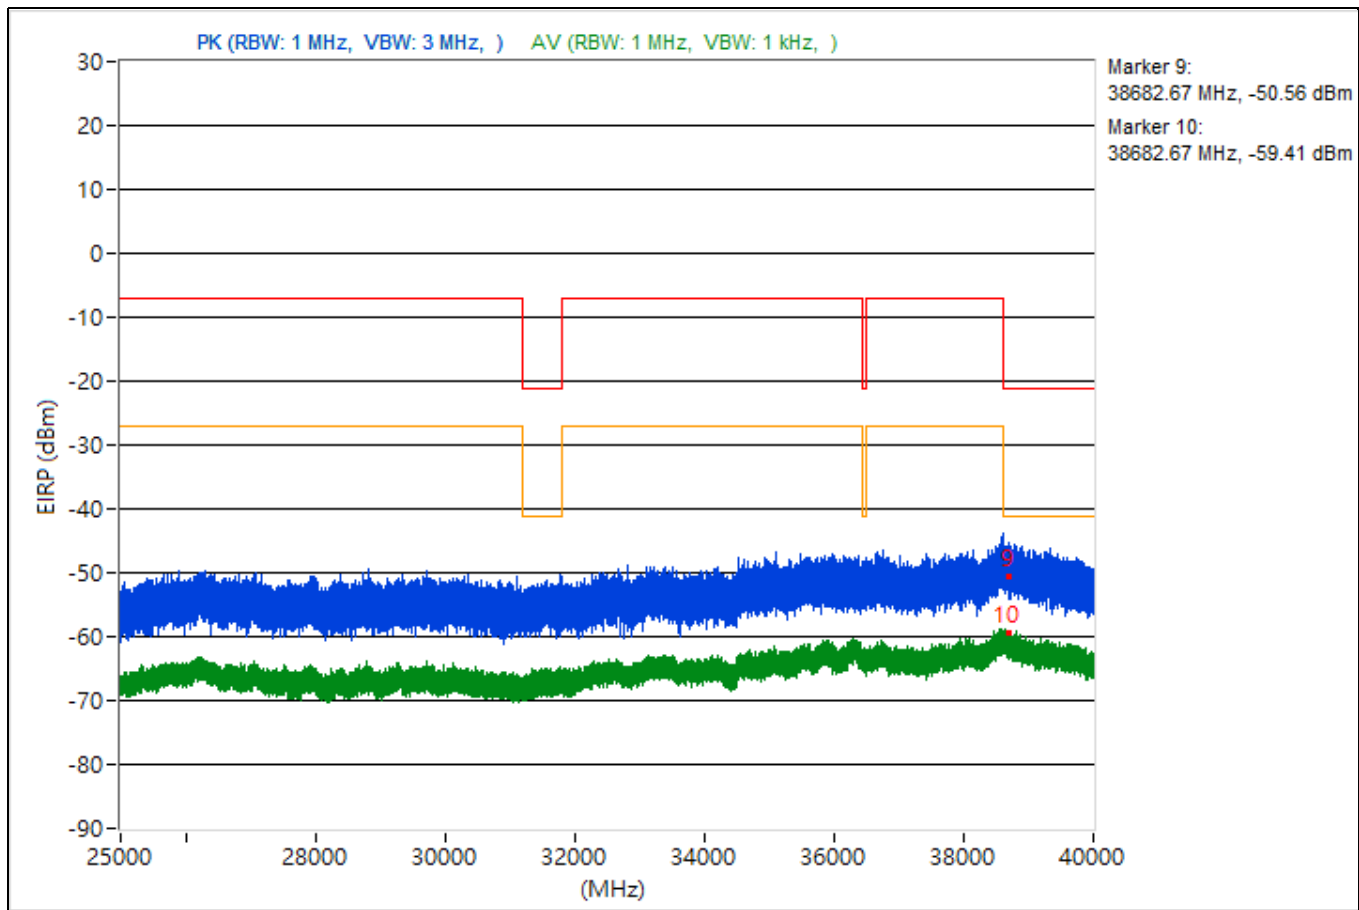


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3756.13	50.11 PK	74	-23.89	-52.51	-53.73	4.92	-45.15
2	3756.13	38.66 AV	54	-15.34	-63.85	-65.33	4.92	-56.6
3	14476.98	48.21 PK	74	-25.79	-55.03	-54.92	4.92	-47.05
4	14476.98	37.83 AV	54	-16.17	-64.41	-66.58	4.92	-57.43
5	19193.2	48.42 PK	74	-25.58	-54.07	-55.6	4.92	-46.84
6	19193.2	38.94 AV	54	-15.06	-62.76	-66.55	4.92	-56.32
7	22372.1	50.46 PK	74	-23.54	-53.83	-51.86	4.92	-44.8
8	22372.1	39.74 AV	54	-14.26	-64.65	-62.51	4.92	-55.52
9	38602.49	45.37 PK	74	-28.63	-57.06	-58.74	4.92	-49.89
10	38602.49	35.98 AV	54	-18.02	-69.95	-65.54	4.92	-59.28

Note: Margin value = Emission Level - Limit value

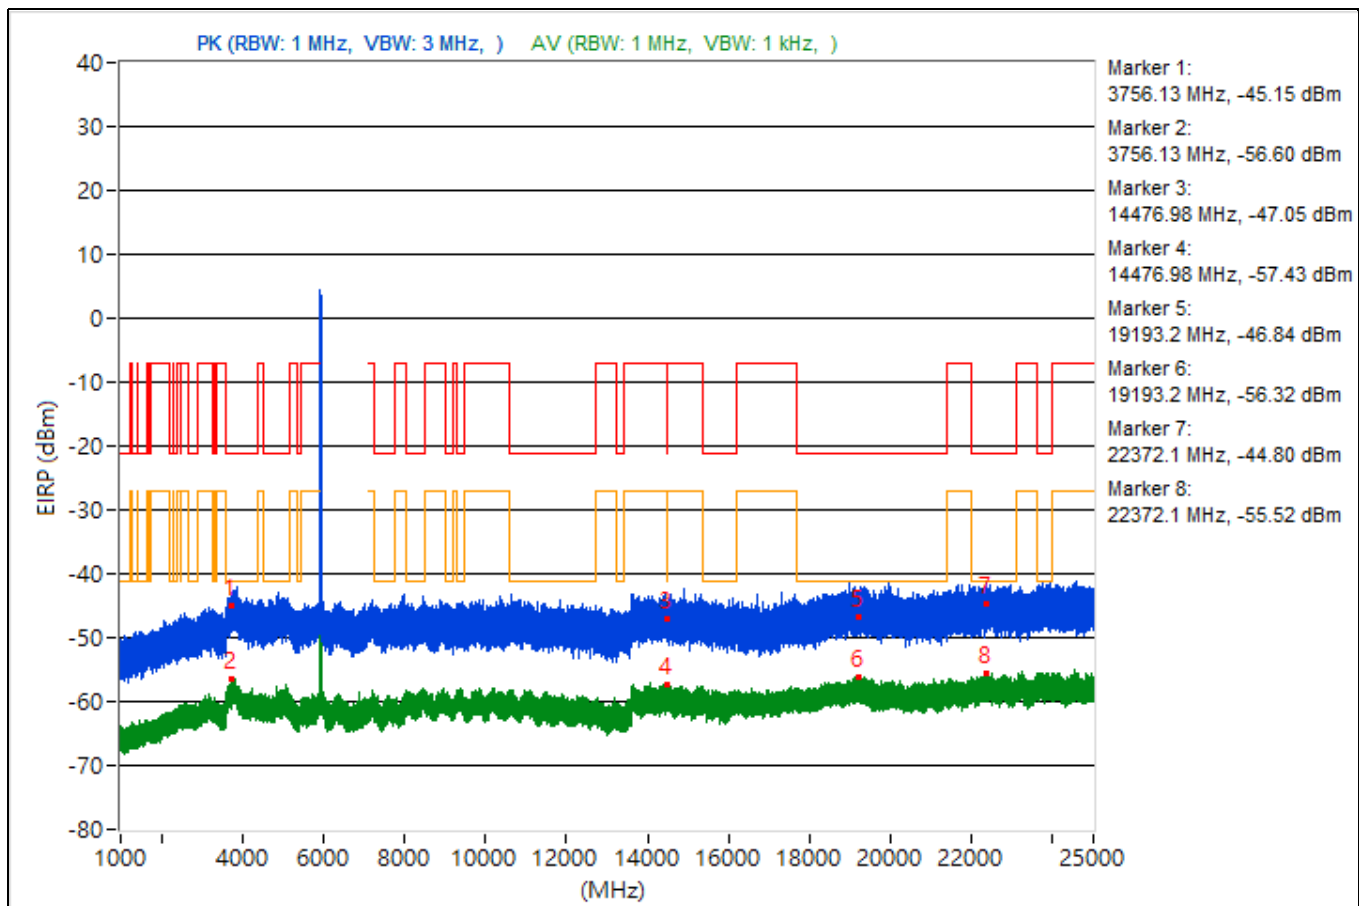


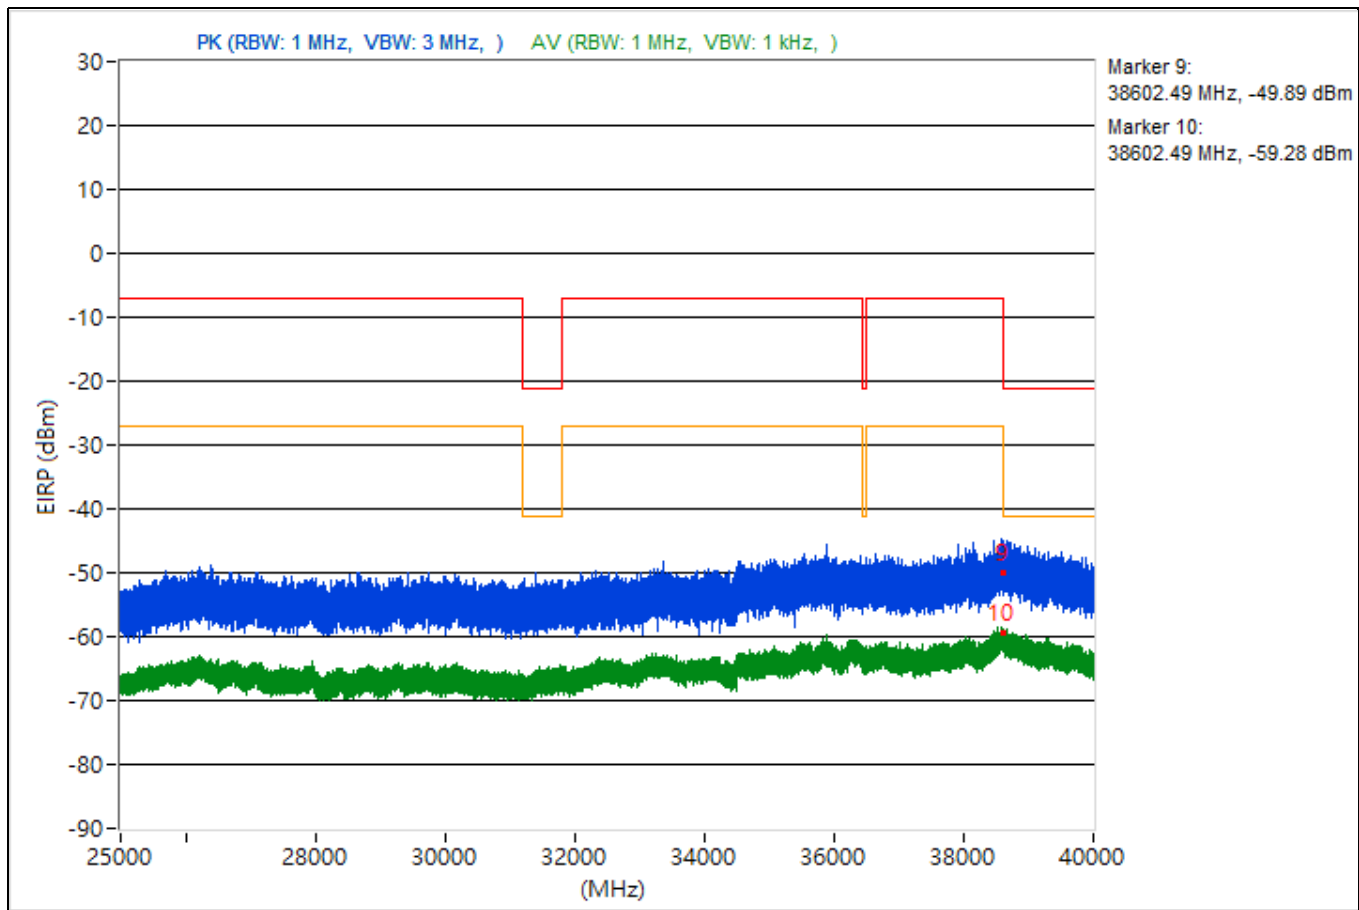


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3858.64	47.68 PK	74	-26.32	-55.53	-55.49	4.92	-47.58
2	3858.64	37.94 AV	54	-16.06	-63.44	-68.39	4.92	-57.32
3	14495.56	50.37 PK	74	-23.63	-53.26	-52.41	4.92	-44.89
4	14495.56	38.16 AV	54	-15.84	-64.98	-65.09	4.92	-57.1
5	18967.3	49.45 PK	74	-24.55	-54.71	-52.96	4.92	-45.81
6	18967.3	38.58 AV	54	-15.42	-66.7	-63.21	4.92	-56.68
7	22419.9	48.37 PK	74	-25.63	-56.44	-53.64	4.92	-46.89
8	22419.9	39.56 AV	54	-14.44	-65.41	-62.37	4.92	-55.7
9	38635.82	45.44 PK	74	-28.56	-60.96	-55.93	4.92	-49.82
10	38635.82	36.72 AV	54	-17.28	-67.07	-65.95	4.92	-58.54

Note: Margin value = Emission Level - Limit value

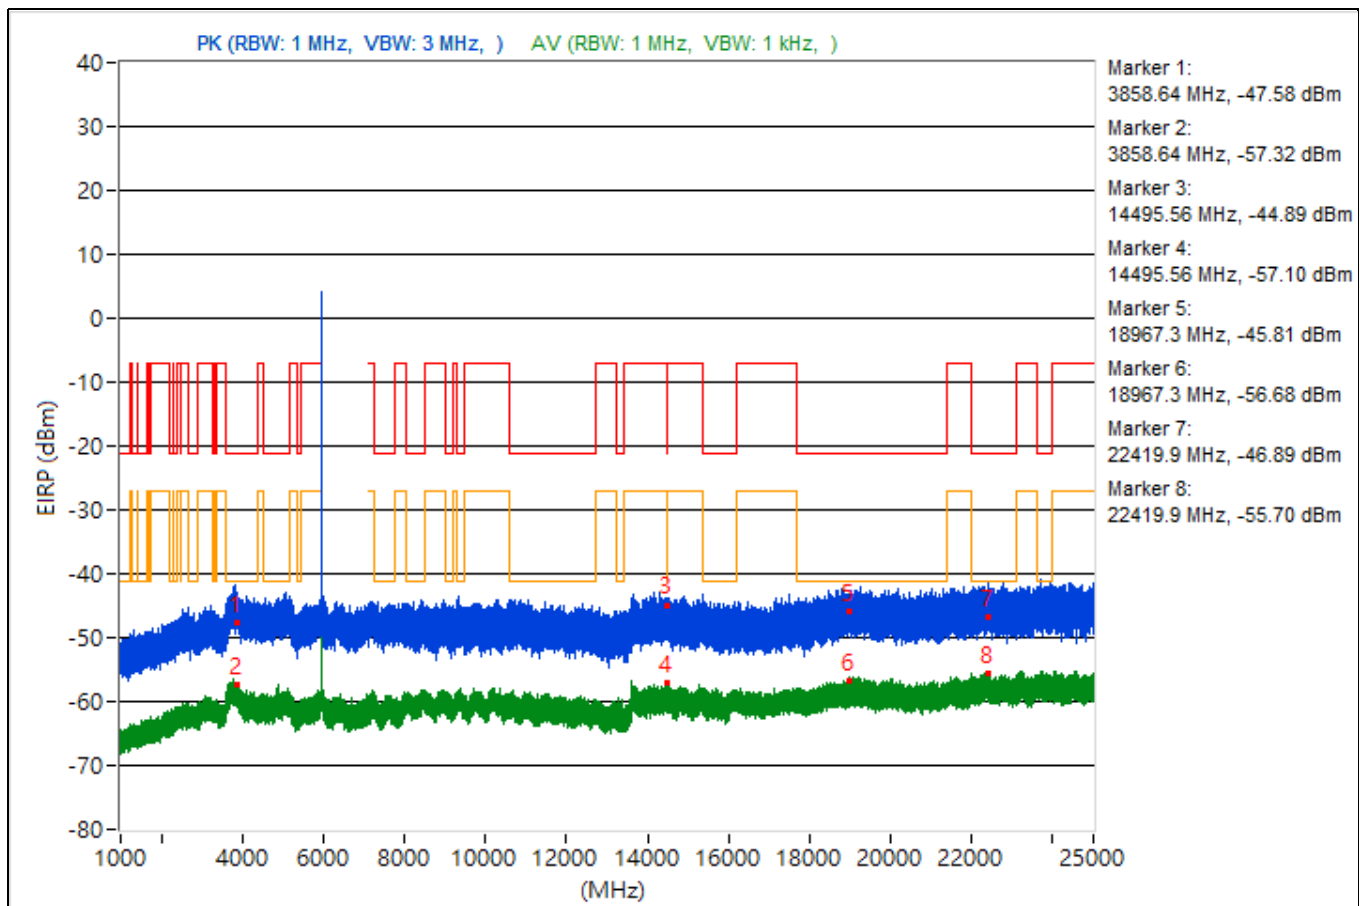


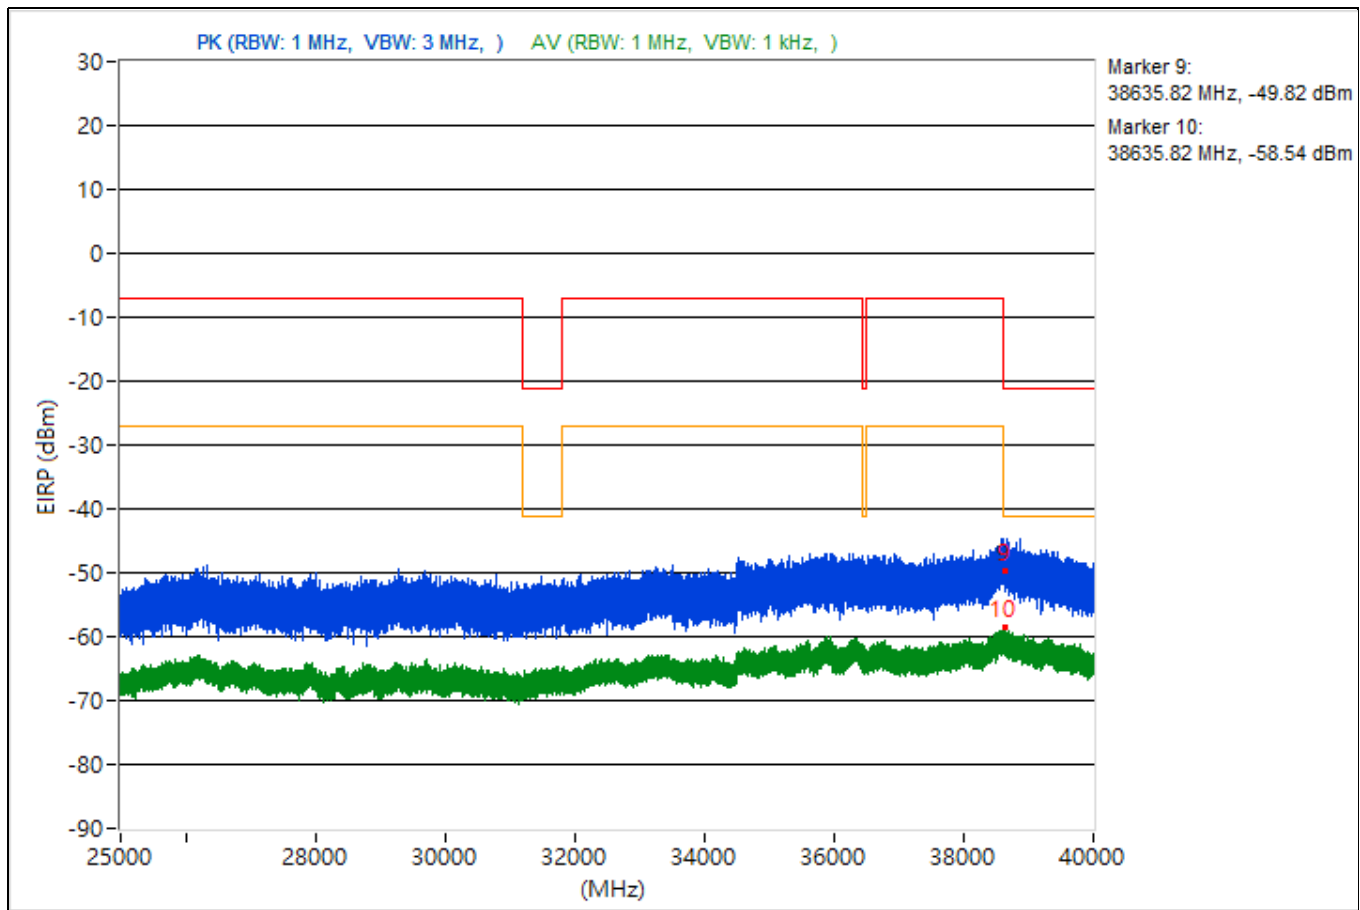


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	1709.96	43.41 PK	74	-30.59	-60.64	-59.07	4.92	-51.85
2	1709.96	38.6 AV	54	-15.4	-62.87	-67.51	4.92	-56.66
3	15362.4	47.38 PK	74	-26.62	-55.6	-56.04	4.92	-47.88
4	15362.4	36.74 AV	54	-17.26	-64.91	-68.85	4.92	-58.52
5	19131.6	52.45 PK	74	-21.55	-51.63	-50	4.92	-42.81
6	19131.6	38.77 AV	54	-15.23	-66.42	-63.05	4.92	-56.49
7	23642.3	50.42 PK	74	-23.58	-52.13	-53.51	4.92	-44.84
8	23642.3	39.63 AV	54	-14.37	-62.28	-65.38	4.92	-55.63
9	38616.27	46.76 PK	74	-27.24	-56.4	-56.46	4.92	-48.5
10	38616.27	36.68 AV	54	-17.32	-67.67	-65.59	4.92	-58.58

Note: Margin value = Emission Level - Limit value

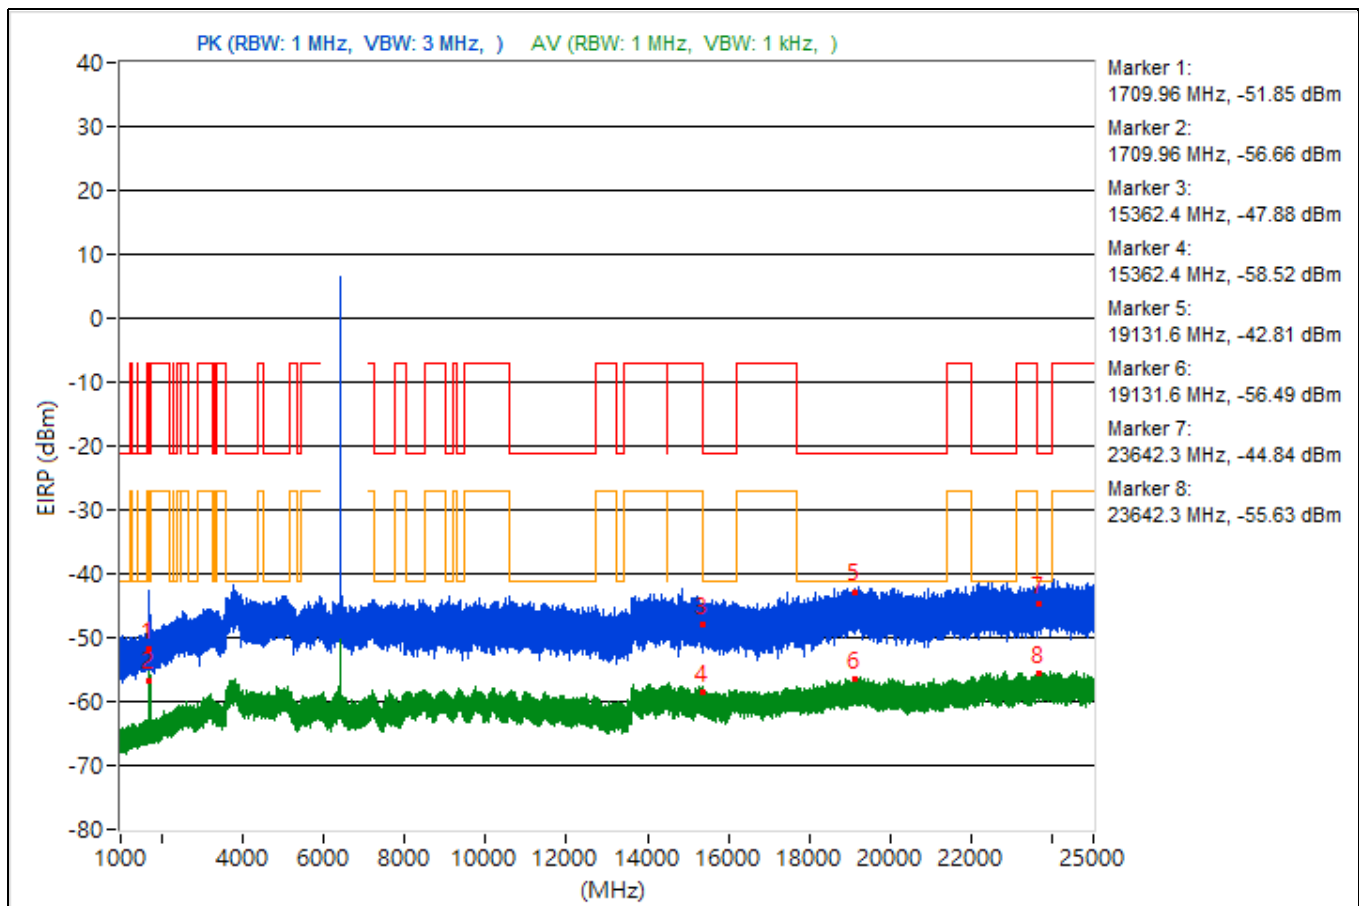


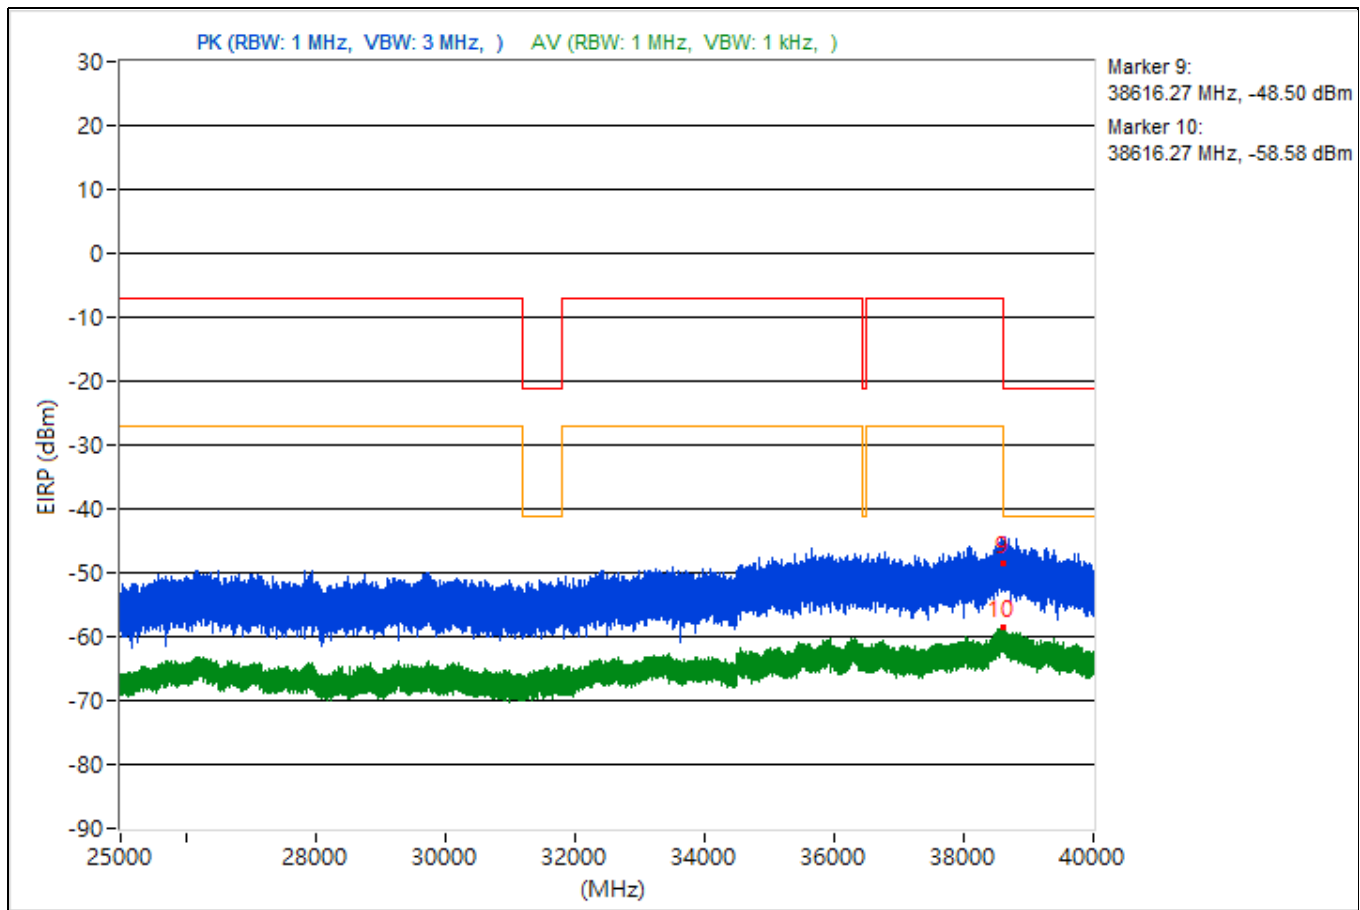


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3797.2	49.63 PK	74	-24.37	-52.99	-54.22	4.92	-45.63
2	3797.2	38.41 AV	54	-15.59	-65.78	-63.97	4.92	-56.85
3	14499.2	49.59 PK	74	-24.41	-54.03	-53.2	4.92	-45.67
4	14499.2	36.92 AV	54	-17.08	-68.79	-64.69	4.92	-58.34
5	19052	47.59 PK	74	-26.41	-53.86	-58.54	4.92	-47.67
6	19052	38.06 AV	54	-15.94	-68.17	-63.36	4.92	-57.2
7	22789.5	52.03 PK	74	-21.97	-53.95	-49.48	4.92	-43.23
8	22789.5	39.79 AV	54	-14.21	-62.37	-64.75	4.92	-55.47
9	38622.4	47.68 PK	74	-26.32	-56.31	-54.84	4.92	-47.58
10	38622.4	36.35 AV	54	-17.65	-64.93	-70.32	4.92	-58.91

Note: Margin value = Emission Level - Limit value

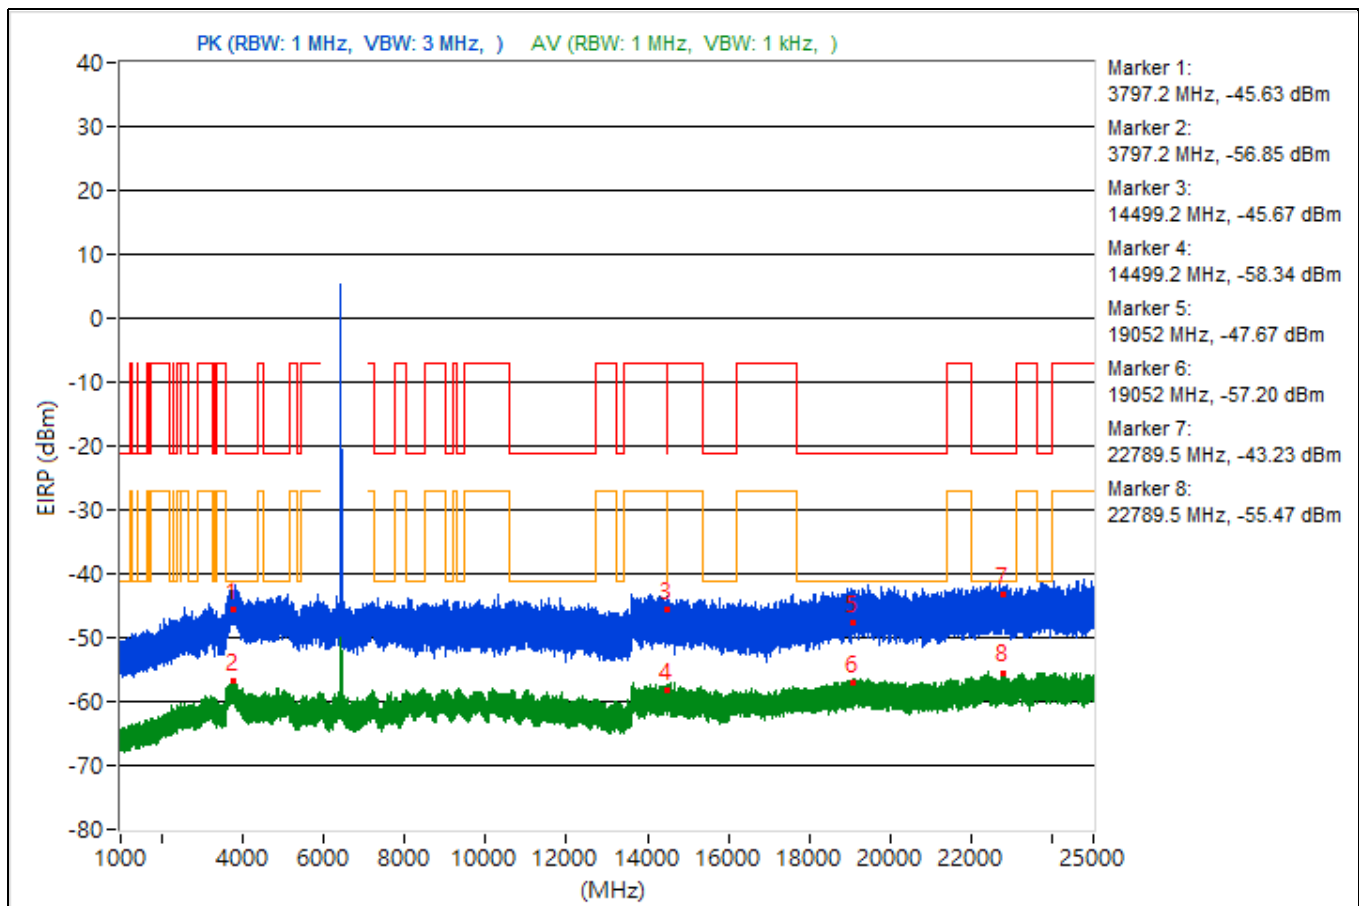


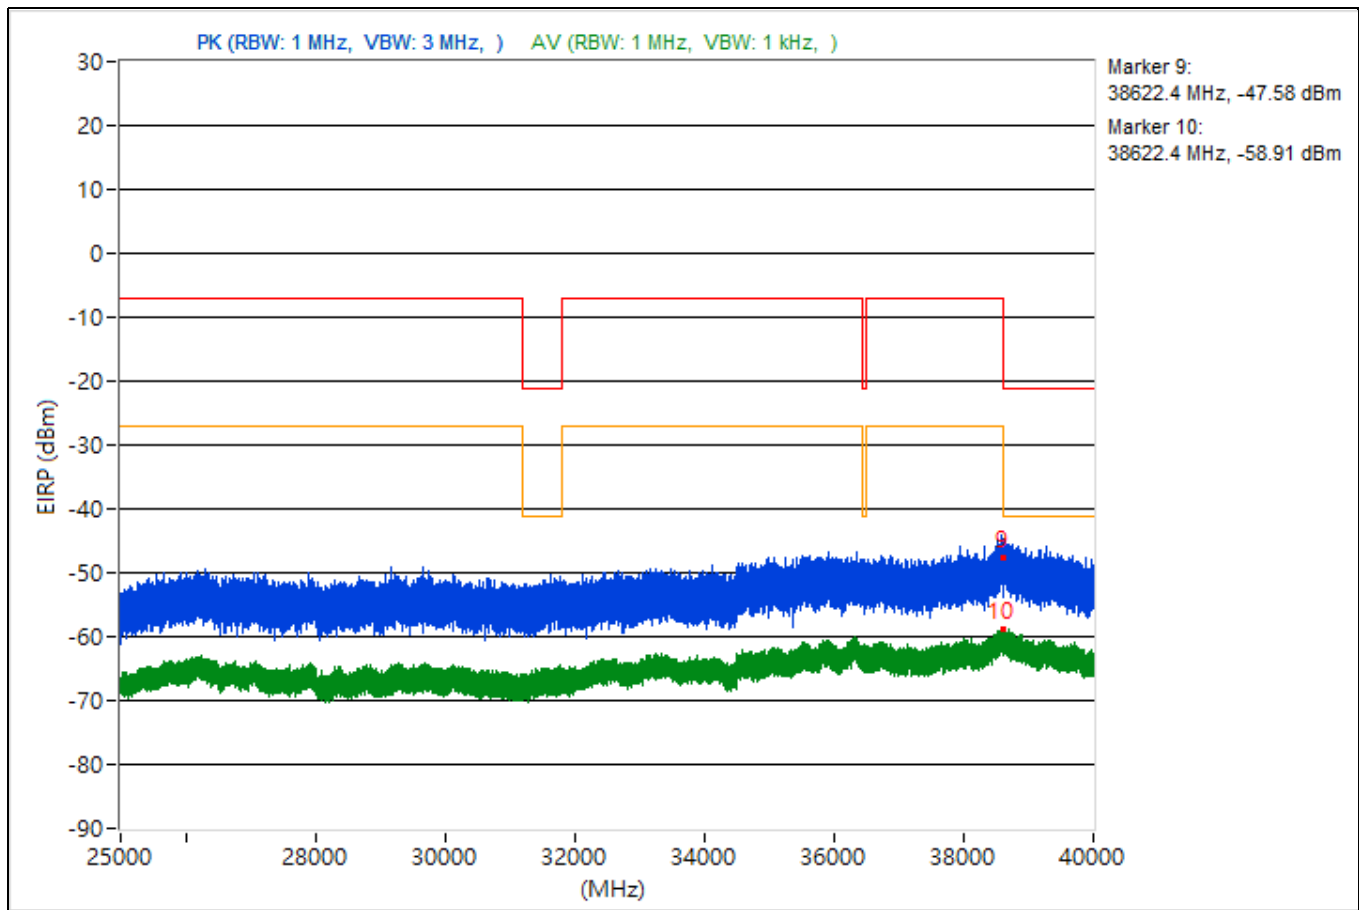


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3799.53	48.35 PK	74	-25.65	-53.75	-56.3	4.92	-46.91
2	3799.53	38.57 AV	54	-15.43	-63.39	-66.34	4.92	-56.69
3	14486.49	48.02 PK	74	-25.98	-56.14	-54.38	4.92	-47.24
4	14486.49	37.97 AV	54	-16.03	-66.52	-64.21	4.92	-57.29
5	19105.1	49.08 PK	74	-24.92	-53.97	-54.25	4.92	-46.18
6	19105.1	39.09 AV	54	-14.91	-63.52	-64.78	4.92	-56.17
7	23640.6	51.25 PK	74	-22.75	-50.85	-53.4	4.92	-44.01
8	23640.6	39.22 AV	54	-14.78	-62.49	-66.22	4.92	-56.04
9	38671.38	46.81 PK	74	-27.19	-58.15	-55.13	4.92	-48.45
10	38671.38	36.1 AV	54	-17.9	-70.1	-65.33	4.92	-59.16

Note: Margin value = Emission Level - Limit value

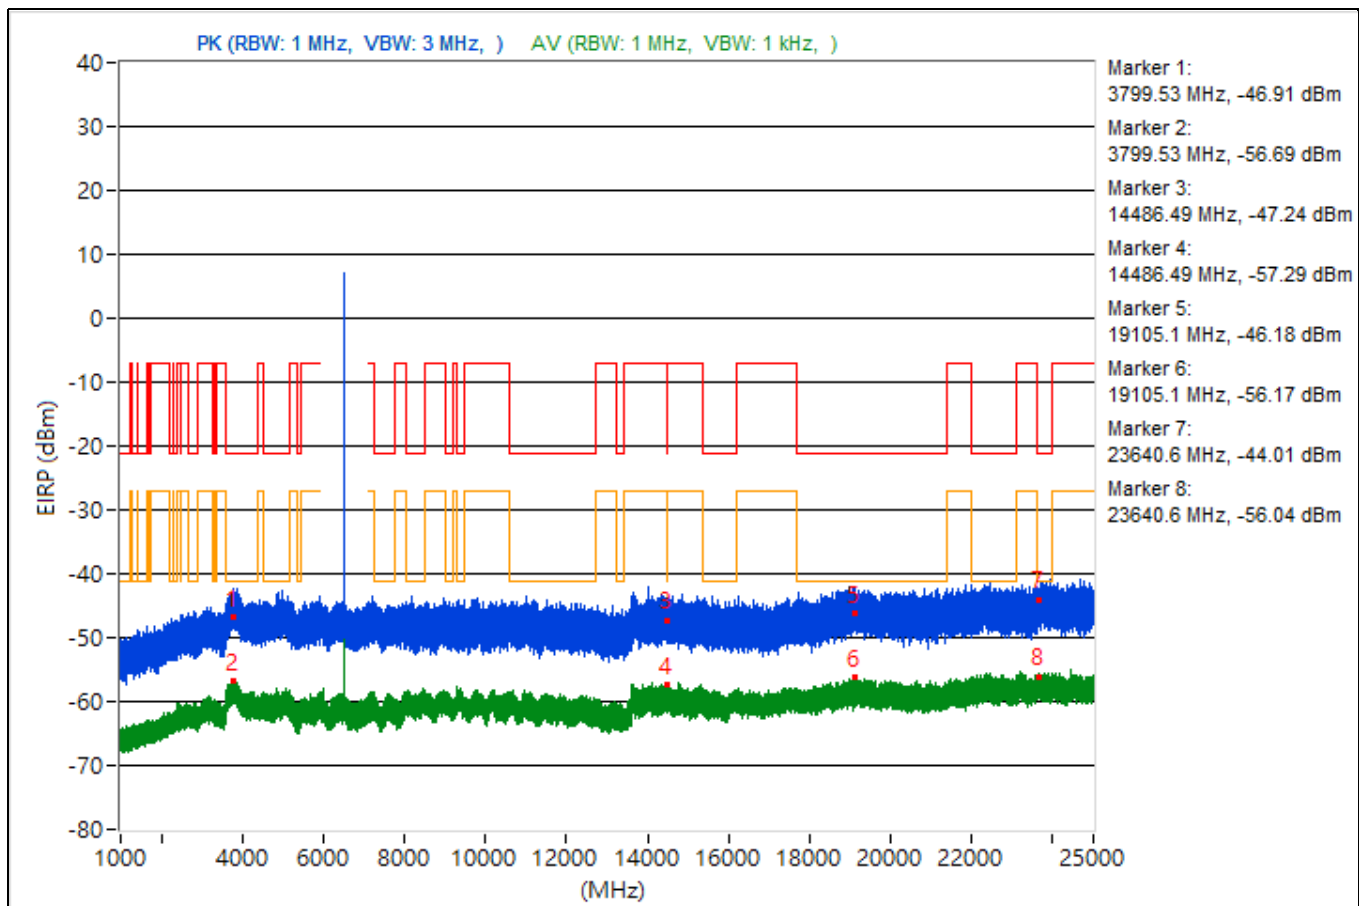


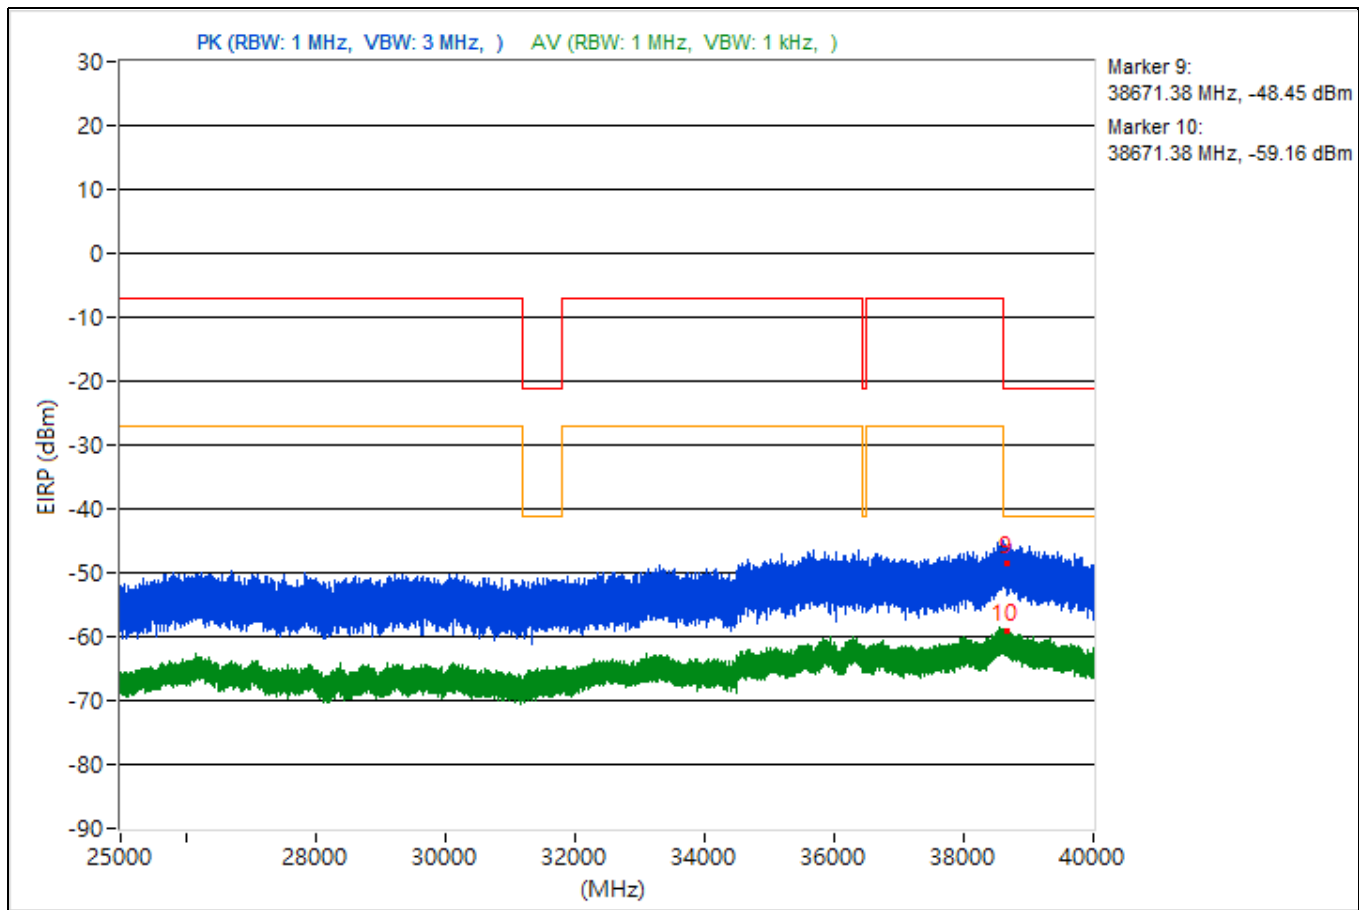


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3754.11	50.26 PK	74	-23.74	-54.7	-51.67	4.92	-45
2	3754.11	38.9 AV	54	-15.1	-63.9	-64.73	4.92	-56.36
3	14471.82	47.43 PK	74	-26.57	-57.76	-54.39	4.92	-47.83
4	14471.82	37.98 AV	54	-16.02	-64.61	-65.91	4.92	-57.28
5	19005.5	48.76 PK	74	-25.24	-54.91	-54	4.92	-46.5
6	19005.5	39.31 AV	54	-14.69	-64.77	-63.14	4.92	-55.95
7	22352.4	47.46 PK	74	-26.54	-57.49	-54.48	4.92	-47.8
8	22352.4	39.66 AV	54	-14.34	-61.94	-66.06	4.92	-55.6
9	38666.58	45.67 PK	74	-28.33	-58.72	-56.58	4.92	-49.59
10	38666.58	36.04 AV	54	-17.96	-69.48	-65.64	4.92	-59.22

Note: Margin value = Emission Level - Limit value

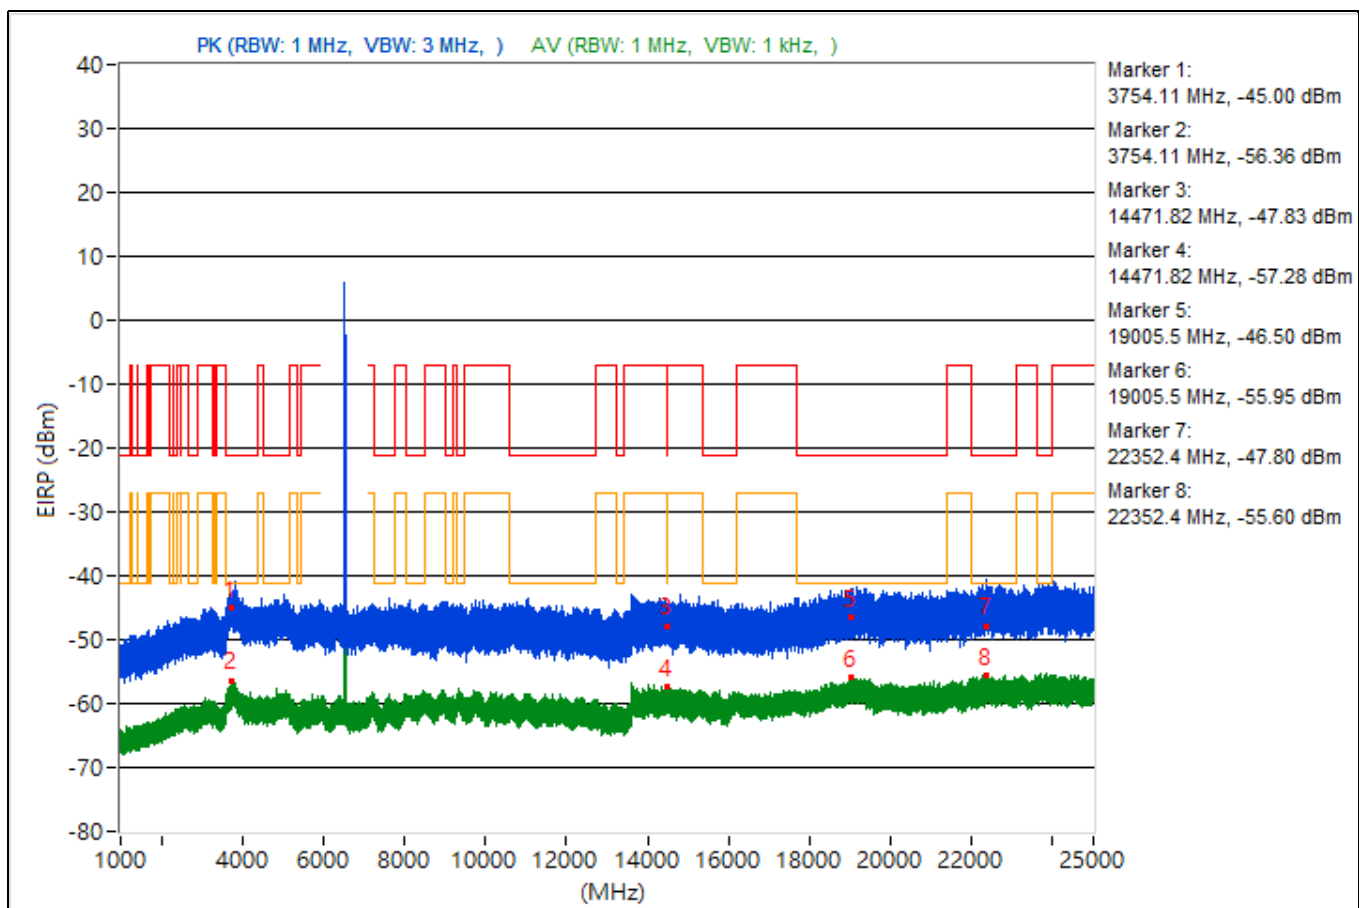


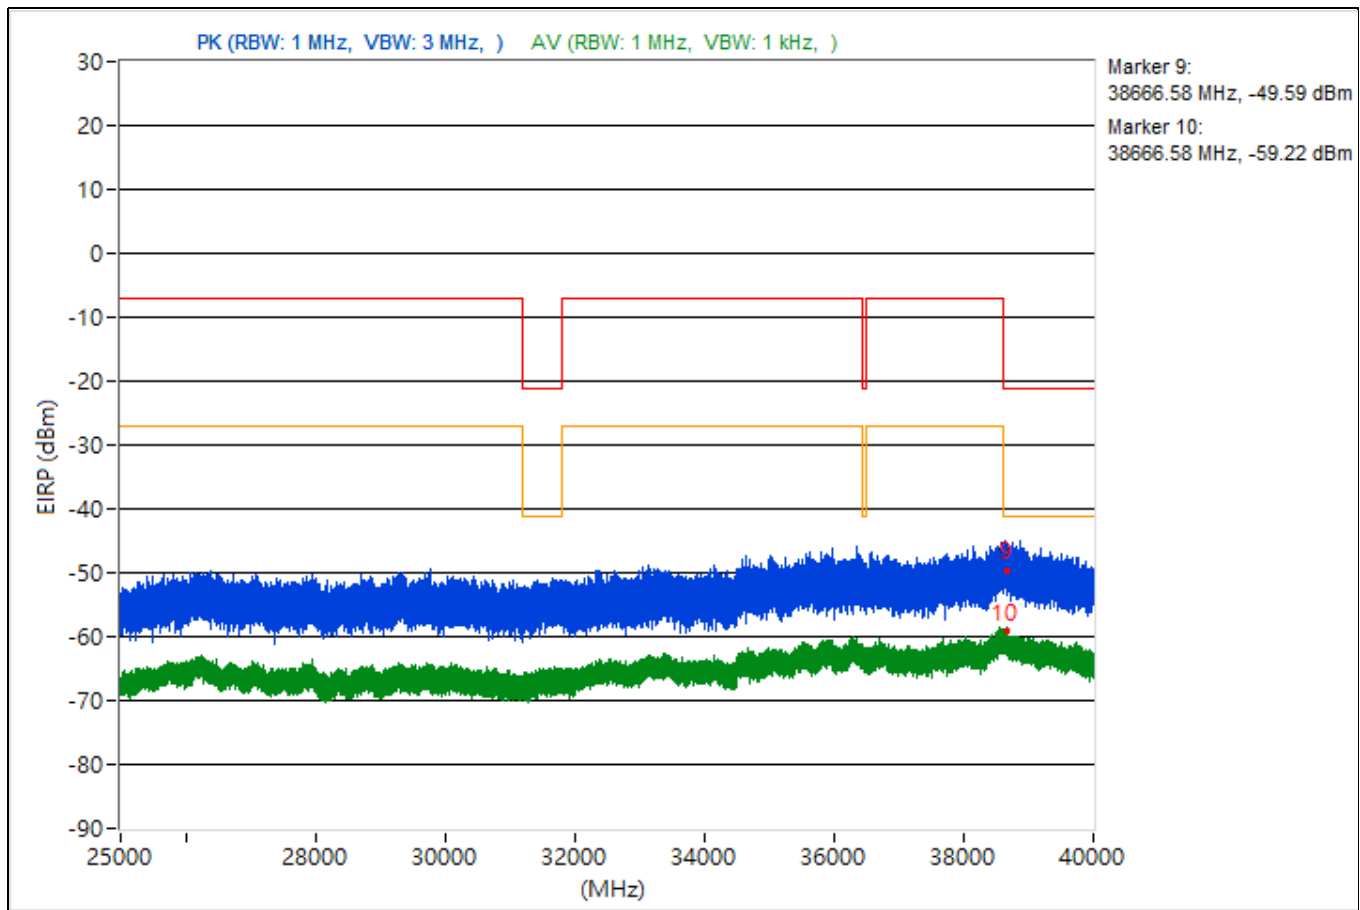


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3798.44	48.81 PK	74	-25.19	-53.83	-55.02	4.92	-46.45
2	3798.44	38.36 AV	54	-15.64	-66.66	-63.55	4.92	-56.9
3	14476.71	48.05 PK	74	-25.95	-54.34	-56.11	4.92	-47.21
4	14476.71	37.92 AV	54	-16.08	-66.53	-64.3	4.92	-57.34
5	19221.9	49.52 PK	74	-24.48	-53.59	-53.75	4.92	-45.74
6	19221.9	38.93 AV	54	-15.07	-63.37	-65.38	4.92	-56.33
7	23702.6	47.63 PK	74	-26.37	-54.85	-56.42	4.92	-47.63
8	23702.6	39.39 AV	54	-14.61	-65.59	-62.53	4.92	-55.87
9	38632.36	45.44 PK	74	-28.56	-57.37	-58.17	4.92	-49.82
10	38632.36	35.86 AV	54	-18.14	-66.56	-68.28	4.92	-59.4

Note: Margin value = Emission Level - Limit value

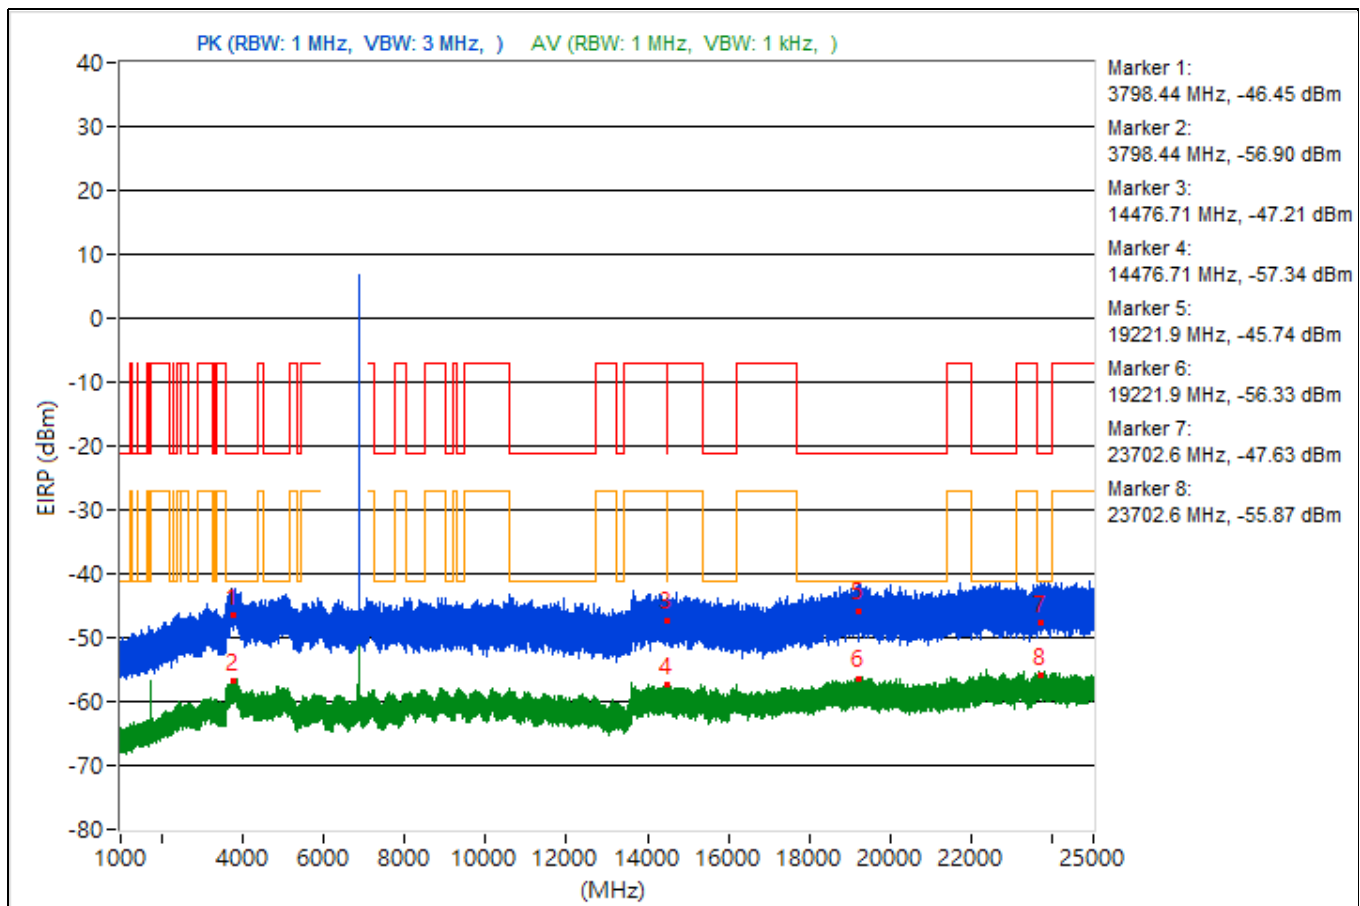


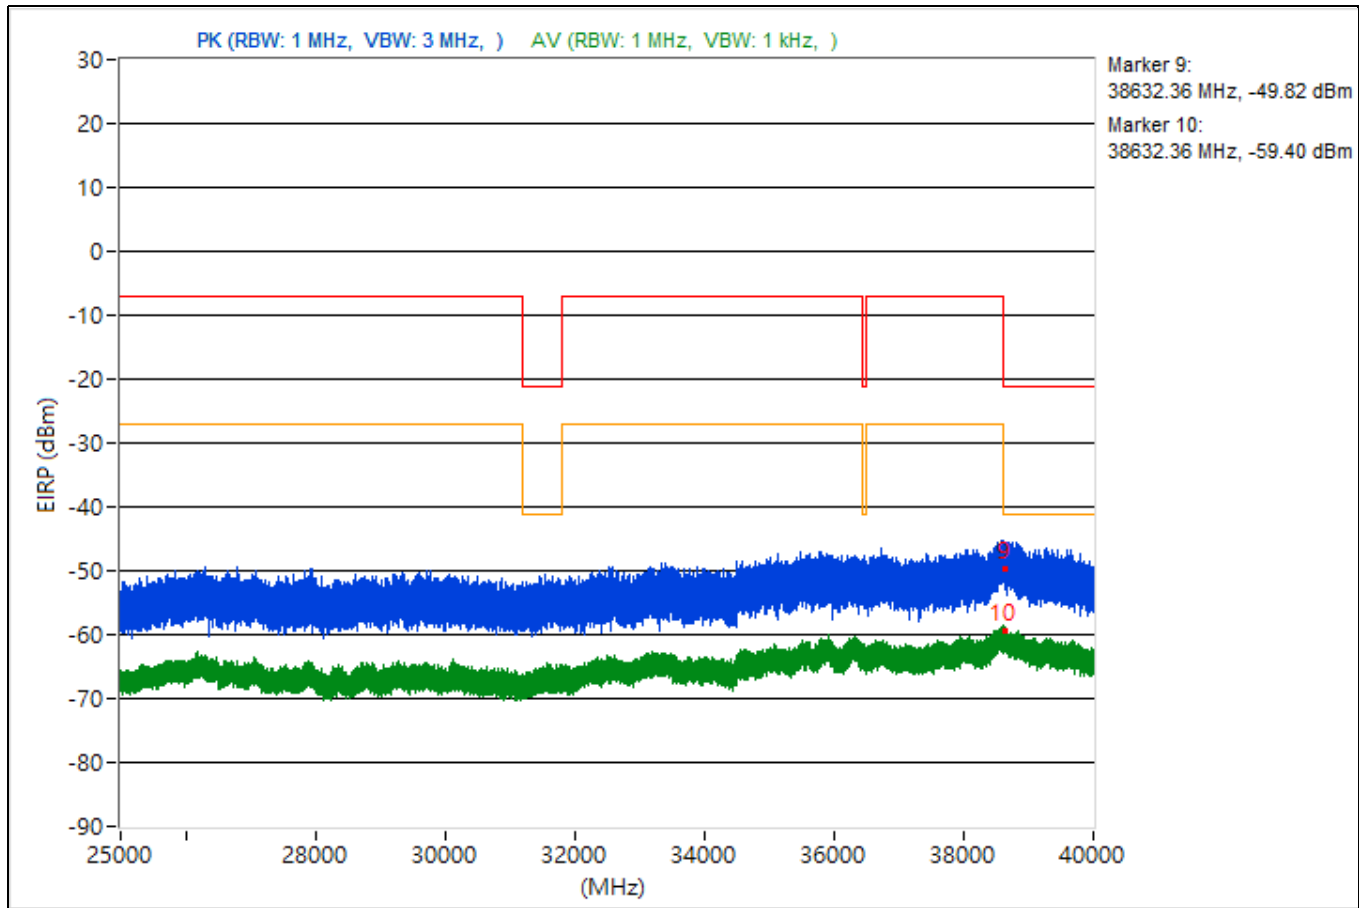


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3756.99	51.24 PK	74	-22.76	-53.07	-51.07	4.92	-44.02
2	3756.99	38.4 AV	54	-15.6	-66.39	-63.62	4.92	-56.86
3	14483.64	47.72 PK	74	-26.28	-55.71	-55.24	4.92	-47.54
4	14483.64	37.79 AV	54	-16.21	-64.34	-66.81	4.92	-57.47
5	19140.7	49.79 PK	74	-24.21	-53.7	-53.12	4.92	-45.47
6	19140.7	39.33 AV	54	-14.67	-65.19	-62.85	4.92	-55.93
7	23691.7	50.72 PK	74	-23.28	-51.43	-53.84	4.92	-44.54
8	23691.7	39.36 AV	54	-14.64	-62.38	-66.04	4.92	-55.9
9	38633.78	44.87 PK	74	-29.13	-57.15	-59.93	4.92	-50.39
10	38633.78	36.02 AV	54	-17.98	-65.42	-70.16	4.92	-59.24

Note: Margin value = Emission Level - Limit value

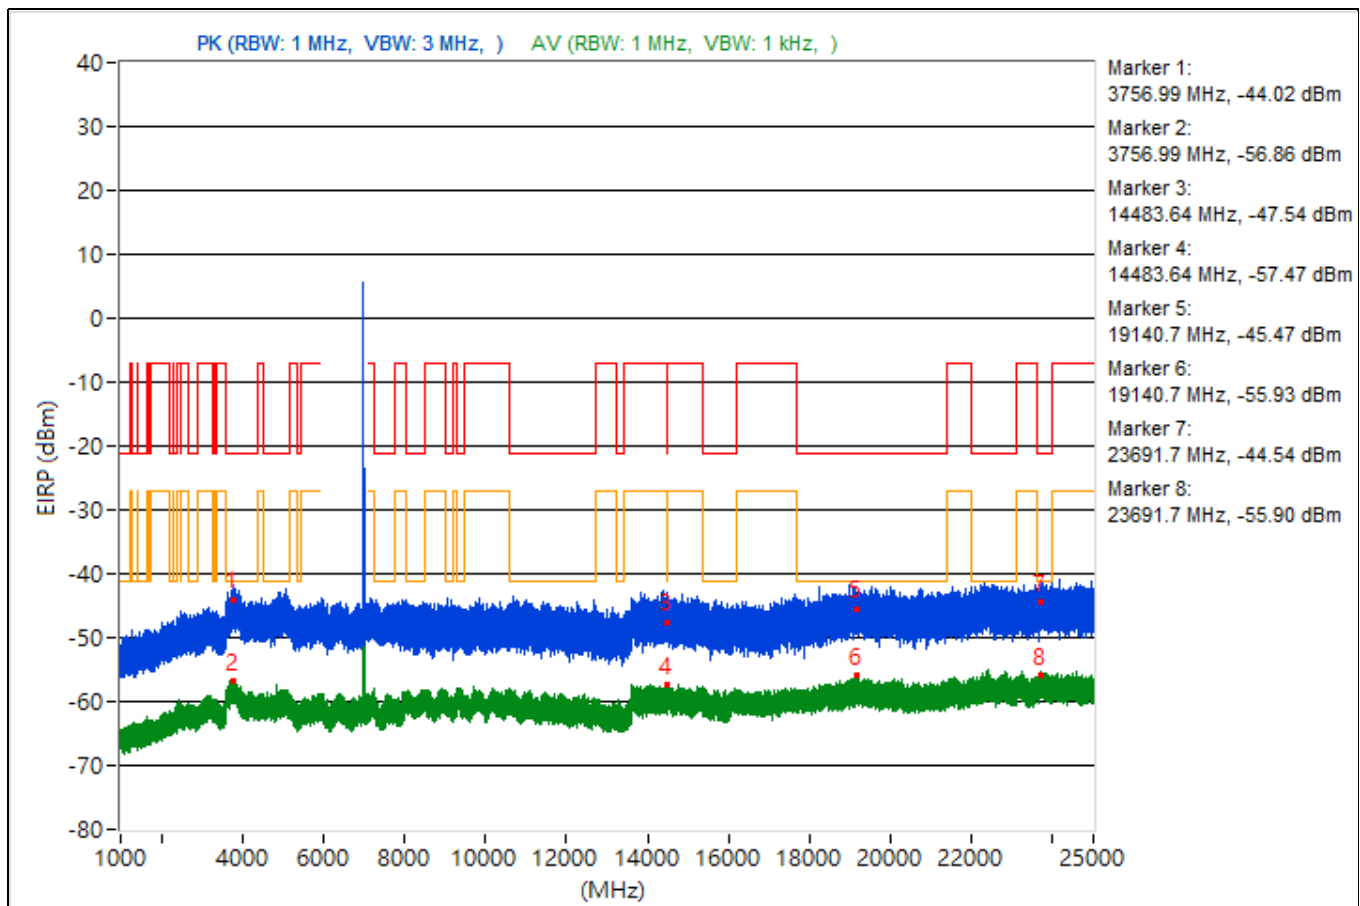


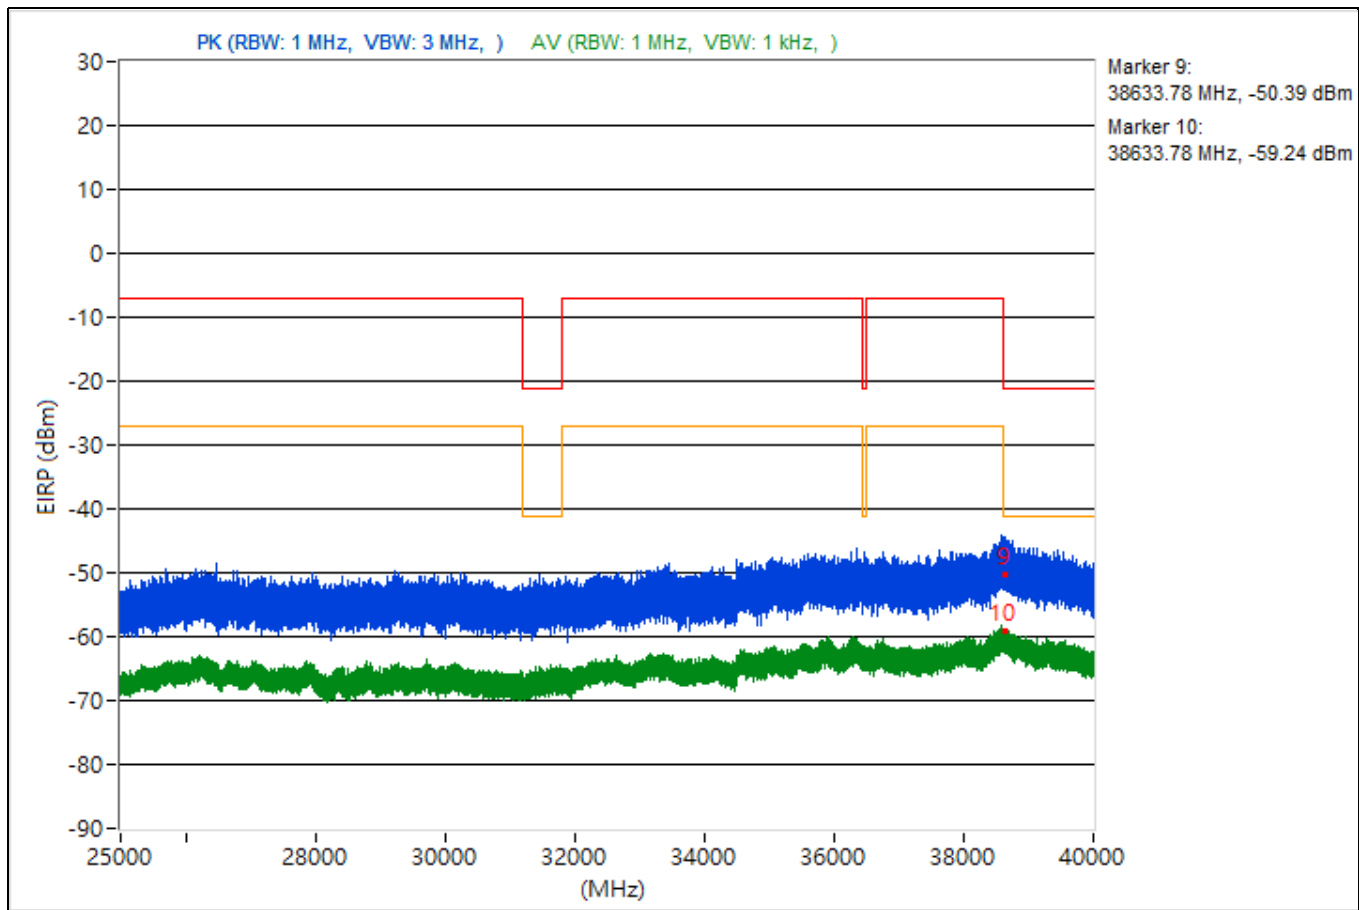


RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3773.48	48.23 PK	74	-25.77	-54.51	-55.47	4.92	-47.03
2	3773.48	38.65 AV	54	-15.35	-65.57	-63.72	4.92	-56.61
3	14492.36	48.99 PK	74	-25.01	-55.68	-53.1	4.92	-46.27
4	14492.36	38.29 AV	54	-15.71	-65.04	-64.77	4.92	-56.97
5	19989.6	49.68 PK	74	-24.32	-51.44	-57.58	4.92	-45.58
6	19989.6	39.12 AV	54	-14.88	-63.12	-65.3	4.92	-56.14
7	22748.8	48.77 PK	74	-25.23	-54.34	-54.5	4.92	-46.49
8	22748.8	39.73 AV	54	-14.27	-64.9	-62.38	4.92	-55.53
9	38602.49	45.83 PK	74	-28.17	-61.05	-55.39	4.92	-49.43
10	38602.49	36.29 AV	54	-17.71	-66.09	-67.9	4.92	-58.97

Note: Margin value = Emission Level - Limit value

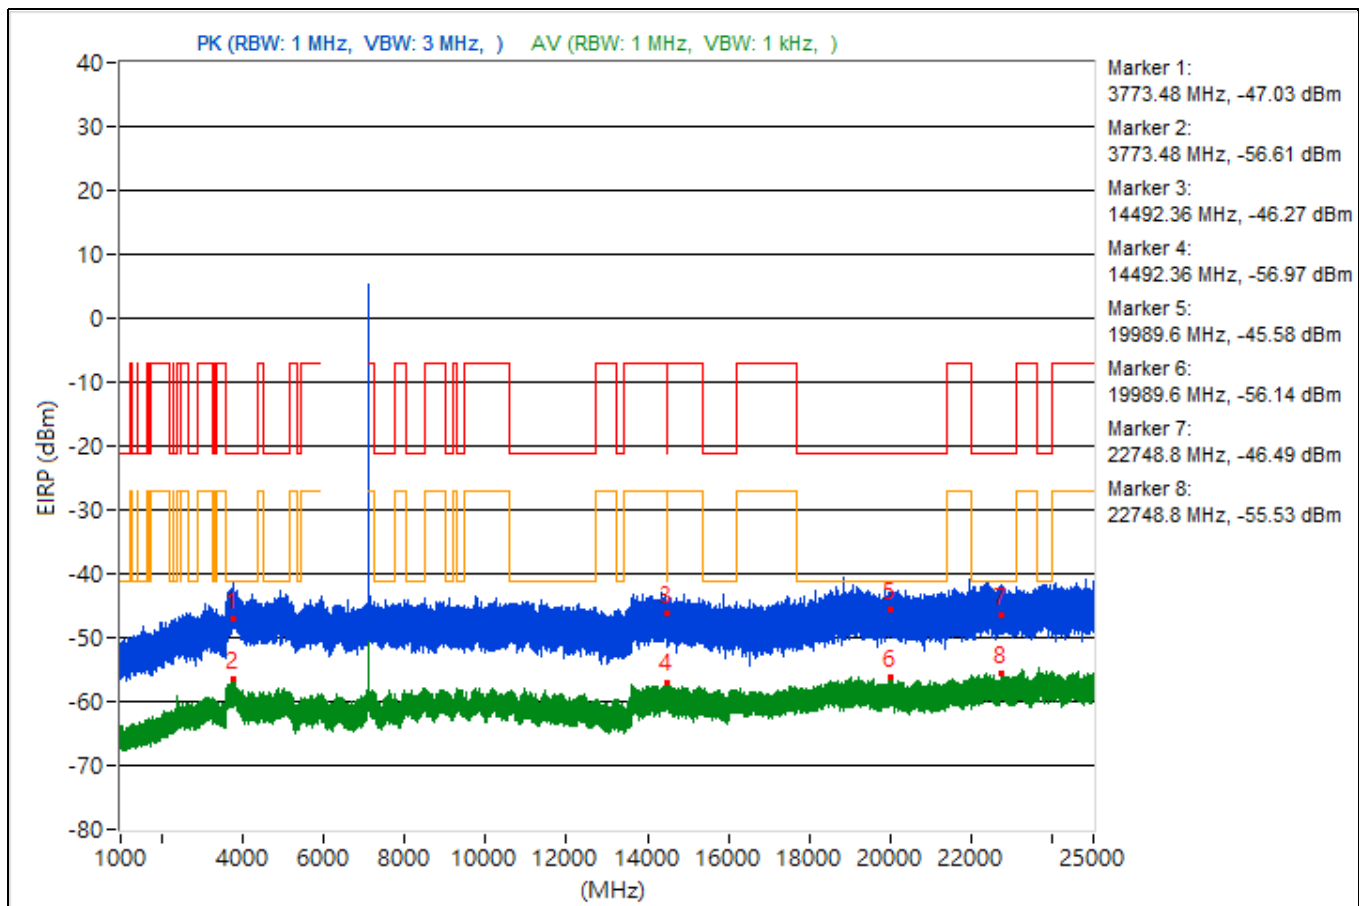


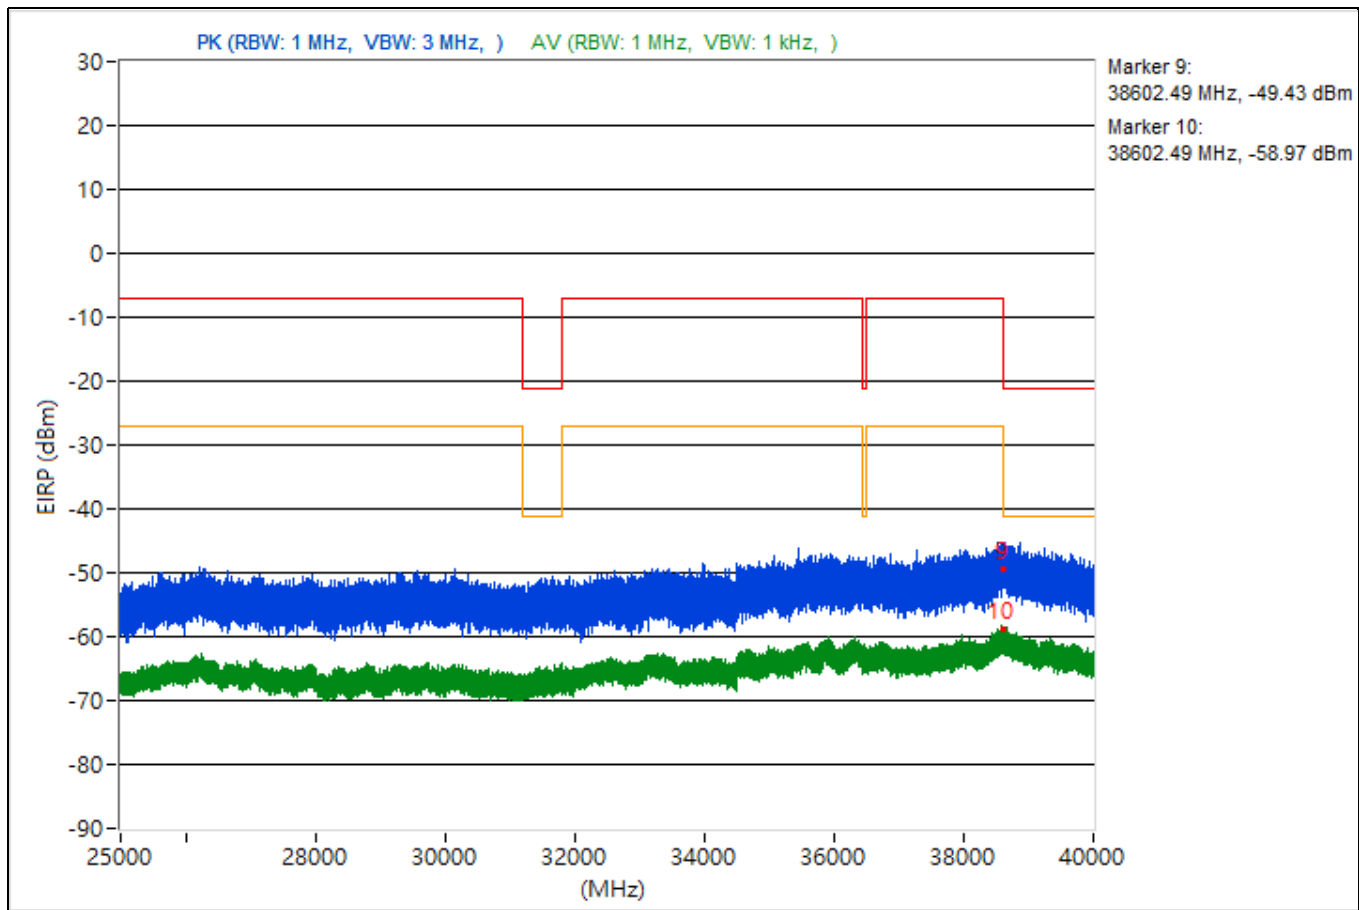


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3848.46	50.41 PK	74	-23.59	-51.72	-54.19	4.92	-44.85
2	3848.46	38.11 AV	54	-15.89	-64.1	-66.36	4.92	-57.15
3	8479.2	48.71 PK	74	-25.29	-54.31	-54.66	4.92	-46.55
4	8479.2	37.42 AV	54	-16.58	-65.15	-66.5	4.92	-57.84
5	19392.7	47.3 PK	74	-26.7	-56.22	-55.59	4.92	-47.96
6	19392.7	38.4 AV	54	-15.6	-63.56	-66.51	4.92	-56.86
7	22771.7	49.33 PK	74	-24.67	-53.23	-54.6	4.92	-45.93
8	22771.7	39.36 AV	54	-14.64	-62.55	-65.63	4.92	-55.9
9	38624	46.38 PK	74	-27.62	-55.6	-58.49	4.92	-48.88
10	38624	36.04 AV	54	-17.96	-65.93	-68.87	4.92	-59.22

Note: Margin value = Emission Level - Limit value

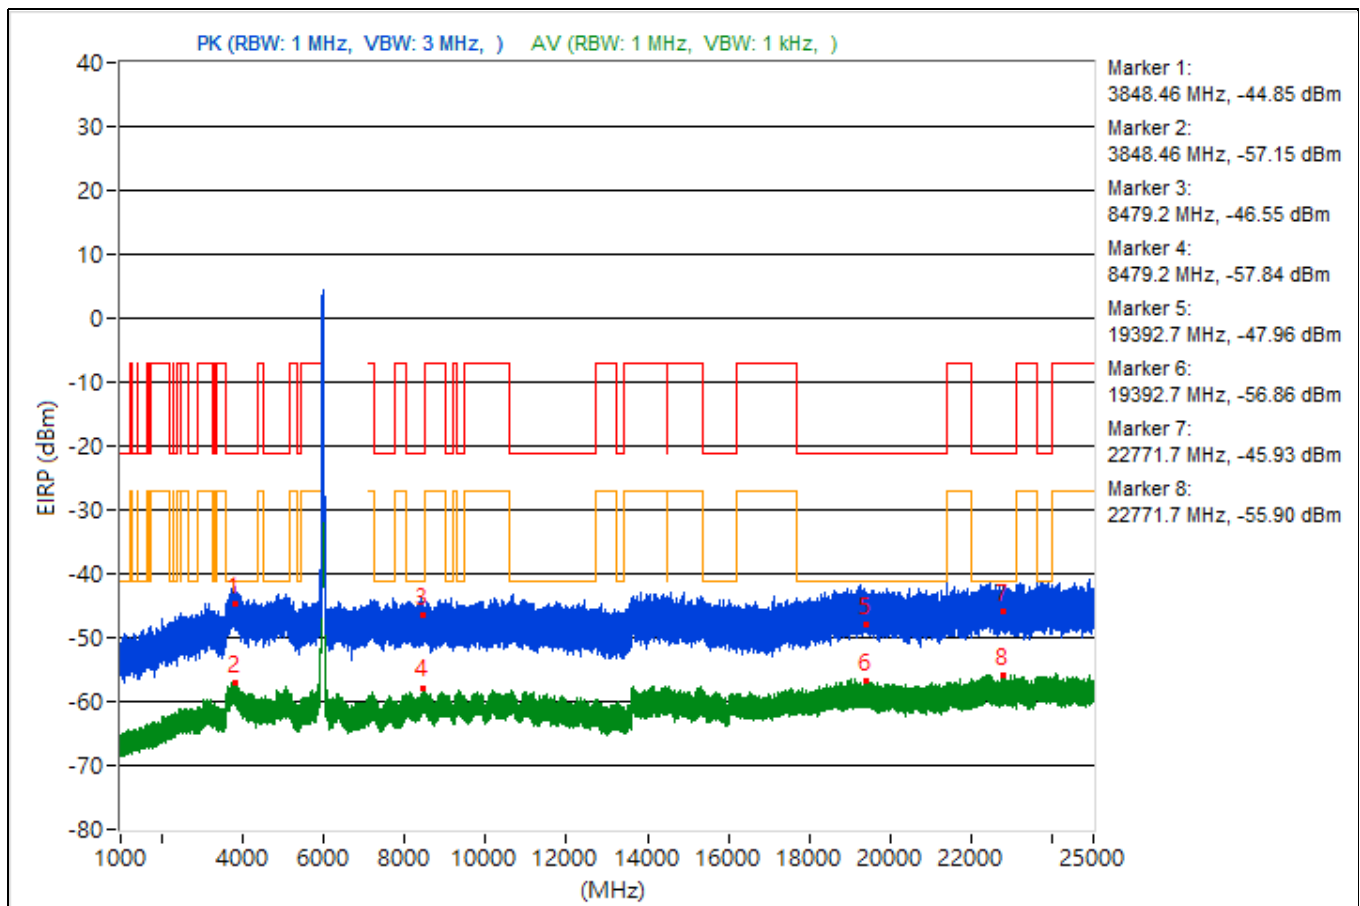


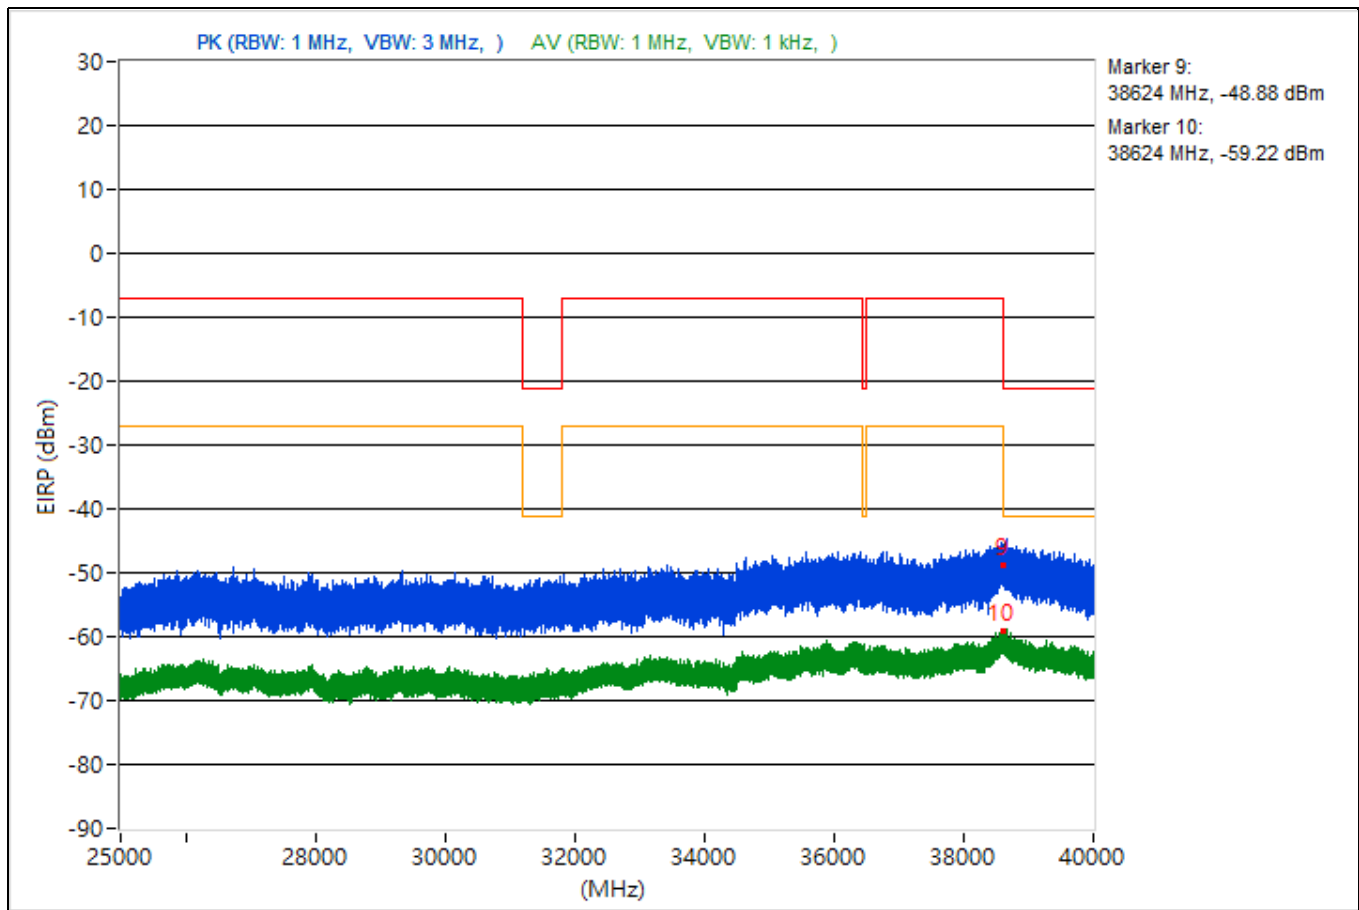


RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	1718.82	45.12 PK	74	-28.88	-56.85	-59.79	4.92	-50.14
2	1718.82	39.19 AV	54	-14.81	-72.6	-61.3	4.92	-56.07
3	14475.29	47.17 PK	74	-26.83	-56.23	-55.82	4.92	-48.09
4	14475.29	37.38 AV	54	-16.62	-65.08	-66.7	4.92	-57.88
5	19107.2	48.35 PK	74	-25.65	-54.36	-55.38	4.92	-46.91
6	19107.2	38.67 AV	54	-15.33	-63.6	-65.7	4.92	-56.59
7	23711.9	51.14 PK	74	-22.86	-52.09	-52.01	4.92	-44.12
8	23711.9	39.73 AV	54	-14.27	-64.39	-62.7	4.92	-55.53
9	38630.67	47.78 PK	74	-26.22	-55.61	-55.22	4.92	-47.48
10	38630.67	35.97 AV	54	-18.03	-68.25	-66.39	4.92	-59.29

Note: Margin value = Emission Level - Limit value

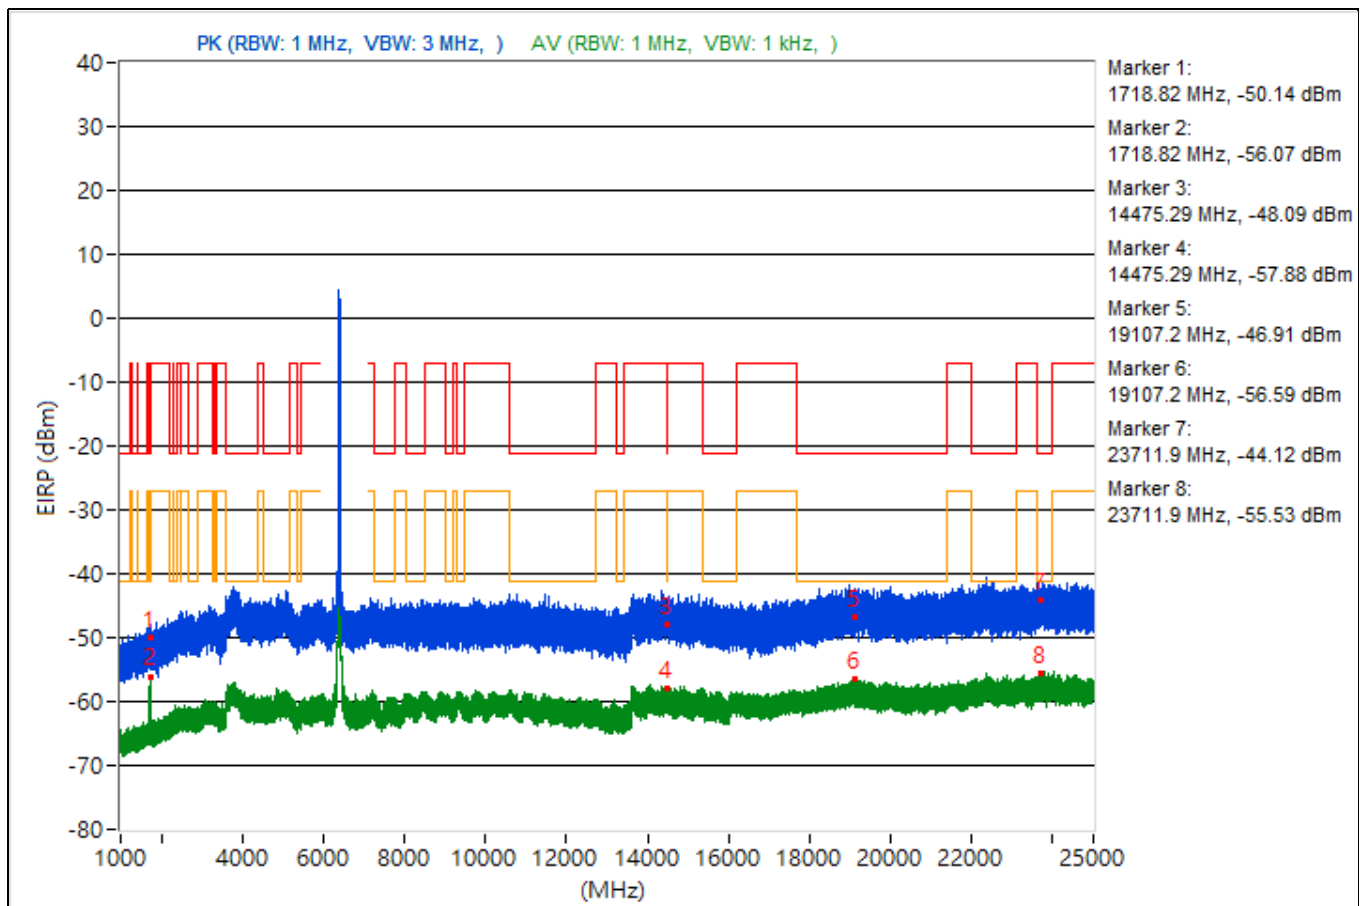

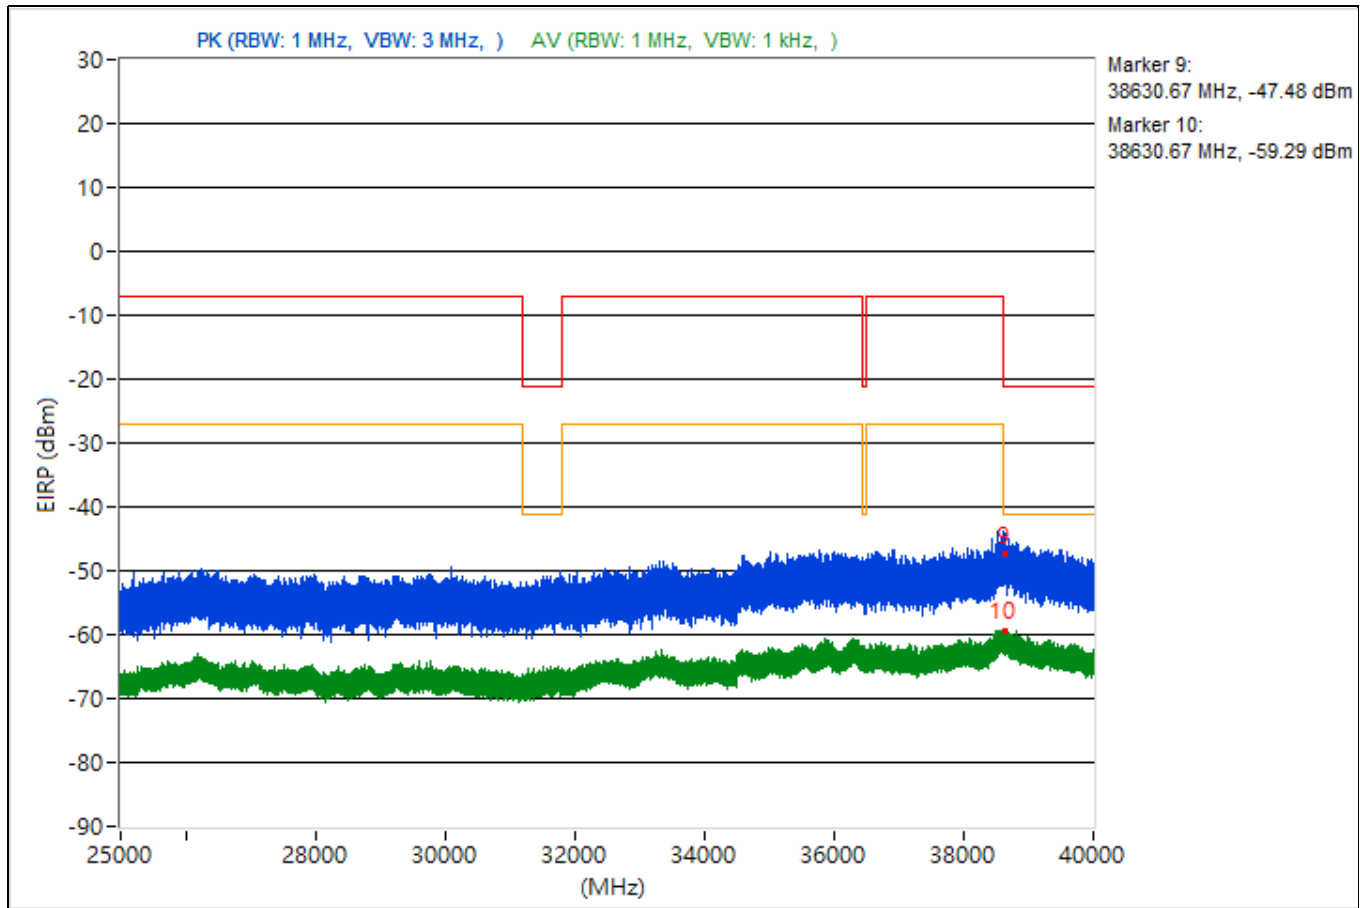

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Input Power	3.3 Vdc
Environmental Conditions	24°C, 55% RH	Tested By	Henry Hsu

Conducted Unwanted Emissions								
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value Chain 0 (dBm)	Raw Value Chain 1 (dBm)	Correction Factor (dB)	EIRP Level (dBm)
1	3777.06	49.91 PK	74	-24.09	-52.27	-54.6	4.92	-45.35
2	3777.06	38.09 AV	54	-15.91	-64.26	-66.15	4.92	-57.17
3	14489.78	48.52 PK	74	-25.48	-53.79	-55.79	4.92	-46.74
4	14489.78	37.23 AV	54	-16.77	-64.62	-67.91	4.92	-58.03
5	19300.9	51.36 PK	74	-22.64	-51.08	-52.74	4.92	-43.9
6	19300.9	38.66 AV	54	-15.34	-63.22	-66.41	4.92	-56.6
7	23617.3	49.94 PK	74	-24.06	-53.55	-52.97	4.92	-45.32
8	23617.3	39.6 AV	54	-14.4	-64.67	-62.73	4.92	-55.66
9	38609.6	46.61 PK	74	-27.39	-57.13	-56.1	4.92	-48.65
10	38609.6	36.33 AV	54	-17.67	-67.61	-66.22	4.92	-58.93

Note: Margin value = Emission Level - Limit value

