

RAE Systems, Inc

RF TEST REPORT

Report Type:

FCC Part 15.247 & ISSED RSS-247 RF report

Model:

RM6800

REPORT NUMBER:

2604B0422SHA-001

ISSUE DATE:

June 11, 2026

DOCUMENT CONTROL NUMBER:

TTRF15.247-02_V1 © 2018 Intertek



Applicant: RAE Systems, Inc
12220 Rojas Drive, El Paso, Texas, 79936. United states

Manufacturer: RAE Systems, Inc
12220 Rojas Drive, El Paso, Texas, 79936. United states

Manufacturing site: Honeywell Sensing and Control (China) Co Ltd.
No. 1668 Tianyin Road Nanjing Science Park Jiangning District
Nanjing 211100 China

Product Name (PMN): ModRAE LoRa
Type/Model (HVIN): RM6800
FCC ID: SU3RM6800
IC: 20969-RM6800

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2024): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2020) +Cor.1(2023) +C63.10a (2024) +Errata to C63.10a(2024): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-247 Issue 4 (July 2025): Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 5 (February 2021) Amendment 2: General Requirements for Compliance of Radio Apparatus

PREPARED BY:**REVIEWED BY:**

Project Engineer
Alexander Li

Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY.....	5
MEASUREMENT RESULT SUMMARY	6
1 GENERAL INFORMATION	7
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	7
1.2 TECHNICAL SPECIFICATION.....	7
1.3 DESCRIPTION OF TEST FACILITY.....	8
2 TEST SPECIFICATIONS.....	9
2.1 STANDARDS OR SPECIFICATION	9
2.2 MODE OF OPERATION DURING THE TEST	9
2.3 TEST SOFTWARE LIST	10
2.4 TEST PERIPHERALS LIST.....	10
2.5 TEST ENVIRONMENT CONDITION:.....	10
2.6 INSTRUMENT LIST	11
2.7 MEASUREMENT UNCERTAINTY.....	12
3 MINIMUM 6DB BANDWIDTH.....	13
3.1 LIMIT	13
3.2 MEASUREMENT PROCEDURE	13
3.3 TEST CONFIGURATION	13
3.4 TEST RESULTS OF MINIMUM 6DB BANDWIDTH.....	13
4 MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P.....	14
4.1 LIMIT	14
4.2 MEASUREMENT PROCEDURE	14
4.3 TEST CONFIGURATION	14
4.4 TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER.....	14
5 POWER SPECTRUM DENSITY	15
5.1 LIMIT	15
5.2 MEASUREMENT PROCEDURE	15
5.3 TEST CONFIGURATION	15
5.4 TEST RESULTS OF POWER SPECTRUM DENSITY	15
6 EMISSION OUTSIDE THE FREQUENCY BAND	16
6.1 LIMIT	16
6.2 MEASUREMENT PROCEDURE	16
6.3 TEST CONFIGURATION	17
6.4 THE RESULTS OF EMISSION OUTSIDE THE FREQUENCY BAND.....	17
7 RADIATED EMISSIONS IN RESTRICTED FREQUENCY BANDS.....	18
7.1 LIMIT	18
7.2 MEASUREMENT PROCEDURE	18
7.3 TEST CONFIGURATION	20
7.4 TEST RESULTS OF RADIATED EMISSIONS	22
8 POWER LINE CONDUCTED EMISSION.....	26
8.1 LIMIT	26
8.2 TEST CONFIGURATION	26
8.3 MEASUREMENT PROCEDURE	27

TEST REPORT

8.4	TEST RESULTS OF POWER LINE CONDUCTED EMISSION.....	28
9	OCCUPIED BANDWIDTH	30
9.1	LIMIT	30
9.2	MEASUREMENT PROCEDURE	30
9.3	TEST CONFIGURATION	30
9.4	THE RESULTS OF OCCUPIED BANDWIDTH	30
10	ANTENNA REQUIREMENT.....	31

Revision History

Report No.	Version	Description	Issued Date
2604B0422SHA-001	Rev. 01	Initial issue of report	June 11, 2026

Measurement result summary

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	RSS-247 Issue 4 Clause 5.2	Pass
Maximum conducted output power and e.i.r.p.	15.247(b)(3)	RSS-247 Issue 4 Clause 5.4	Pass
Power spectrum density	15.247(e)	RSS-247 Issue 4 Clause 5.2	Pass
Emission outside the frequency band	15.247(d)	RSS-247 Issue 4 Clause 5.5	Pass
Radiated Emissions in restricted frequency bands	15.247(d), 15.205&15.209	RSS-Gen Issue 5 Clause 8.9&8.10	Pass
Power line conducted emission	15.207(a)	RSS-Gen Issue 5 Clause 8.8	NA
Occupied bandwidth	-	RSS-Gen Issue 5 Clause 6.6	Tested
Antenna requirement	15.203	-	Pass

Notes:

- 1: NA =Not Applicable
- 2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.
- 3: Additions, Deviations and Exclusions from Standards: None.

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	ModRAE LoRa
Type/Model:	RM6800
Brand Name:	Honeywell
Description of EUT:	The product covered by this report is ModRAE LoRa, which is equipped with LoRa module and GNSS module.
Rating:	DC3.3V
Category of EUT:	Class A
EUT type:	☒ Table top ☐ Floor standing
Software Version:	/
Hardware Version:	/
Sample identification number:	A269523-24-001
Sample received date:	May 23, 2026
Date of test:	May 23, 2026 to June 11, 2026

1.2 Technical Specification

Frequency Range:	906MHz ~ 924MHz
Support Standards:	LoRa
Type of Modulation:	BPSK
Channel Number:	10
Channel Separation:	2MHz
Antenna Information:	PIFA Antenna, 0.89dBi

1.3 Description of Test Facility

Name:	Intertek Testing Services (Shanghai FTZ) Co., Ltd.
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L21189
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2024)

ANSI C63.10 (2020) +Cor.1(2023) +C63.10a (2024) +Errata to C63.10a(2024)

KDB 558074 D01(v05r02)

RSS-247 Issue 4 (July 2025)

RSS-Gen Issue 5 (February 2021) Amendment 2

2.2 Mode of operation during the test

Three axes (X, Y, Z) were observed while the test receiver worked as “max hold” continuously and the highest reading among the whole test procedure was recorded. Compare with the test results that X axis is the worst case.

The lowest, middle and highest channel were tested as representatives.

Frequency Band (MHz)		906MHz ~ 924MHz	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	906	6	916
2	908	7	918
3	910	8	920
4	912	9	922
5	914	10	924

Data rate VS Power:

The test setting software is offered by the manufactory. The pre-scan for the conducted power with all rates in each modulation and bands was used, and the worst case was found and used in all test cases.

Test software and Power Setting parameter			
Test Software	SSCOM V5.13.1		
Working Mode	906MHz ~ 924MHz		
Test Channel	906MHz	916MHz	924MHz
Power setting	18	18	18

TEST REPORT

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

Radiated test mode: EUT transmitted signal with antenna;

Conducted test mode: EUT transmitted signal from RF port connected to SPA directly;

2.3 Test software list

Test Items	Software	Manufacturer	Version
Radiated emission	SKET Auto EMC Test Software	Keleto	V1.5.0.4
Conducted emission	SKET Auto EMC Test Software	Keleto	V1.5.0.4

2.4 Test peripherals list

Item No.	Name	Brand and Model	Description
1	Laptop computer	DELL	-

2.5 Test environment condition:

Test items	Temperature	Humidity
Minimum 6dB Bandwidth	24°C	55% RH
Maximum conducted output power and e.i.r.p.		
Power spectrum density		
Emission outside the frequency band		
Occupied bandwidth		
Radiated Emissions in restricted frequency bands	23°C	57% RH
Power line conducted emission	22°C	56% RH

2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Test Receiver	R&S	ESR7	EC 6194	2027-02-17
☒	Attenuator	Hua Xiang	Ts5-10db-6g	EC 6194-1	2026-12-06
☒	A.M.N.	R&S	ENV4200	EC 3558	2026-06-04
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Test Receiver	R&S	ESIB 26	EC 3045	2026-08-18
☒	Test Receiver	R&S	ESR	EC6501	2026-09-10
☒	TRILOG broadband Antenna	Schwarzbeck	VULB9168	EC 6402	2027-04-07
☒	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2026-08-24
☒	Pre-amplifier	Tonscend	tap01018050	EC 6432-1	2026-12-07
☒	Horn antenna	Tonscend	bha9120d	EC 6432-2	2027-02-15
☒	Horn antenna	ETS	3117	EC 4792-1	2026-09-15
☒	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2026-09-12
☒	Horn antenna	ETS	3116c	EC 5955	2026-08-14
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2027-05-25
Tet Site					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Shielded room	Zhongyu	-	EC 2838	2027-01-09
☒	Shielded room	Zhongyu	-	EC 2839	2027-01-09
☒	Semi-anechoic chamber	Albatross project	-	EC 3048	2026-07-11
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Thermo-Hygrograph	Testo	175h1	EC 6640	2026-08-03
☒	Thermo-Hygrograph	Testo	175h1	EC6642	2026-08-03
☒	Thermo-Hygrograph	Testo	175h1	EC 6643	2026-08-03

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	$\pm 0.74\text{dB}$
Power spectrum density	$\pm 0.74\text{dB}$
Radiated Emissions in restricted frequency bands below 1GHz	$\pm 4.90\text{dB}$
Radiated Emissions in restricted frequency bands above 1GHz	$\pm 5.02\text{dB}$
Emission outside the frequency band	$\pm 2.89\text{dB}$
Power line conducted emission	$\pm 3.19\text{dB}$
Occupied bandwidth	$\pm 0.84 \times 10^{-7}$
Occupied bandwidth	$\pm 0.84 \times 10^{-7}$

3 Minimum 6dB bandwidth

Test result: Pass

3.1 Limit


For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2 Measurement Procedure

The minimum 6dB bandwidth is measured using the Spectrum Analyzer according to DTS test procedure of "KDB558074 D01 DTS Meas Guidance" (clause 8.2) for compliance requirements.

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3 Test Configuration

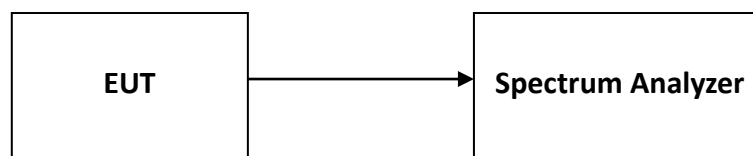

3.4 Test Results of Minimum 6dB bandwidth

Please refer to Appendix.

4 Maximum conducted output power and e.i.r.p.

Test result: Pass

4.1 Limit

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands:
1 W. (The e.i.r.p. shall not exceed 4 W)


If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 30dBm and 30+ (6 –antenna gain-beam forming gain).

4.2 Measurement Procedure

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 9.1.1) for compliance requirements.

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

4.3 Test Configuration

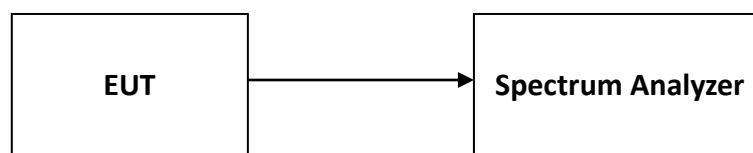

4.4 Test Results of Maximum conducted output power

Please refer to Appendix.

5 Power spectrum density

Test result: Pass

5.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.


If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 8dBm/MHz and $8 + (6 - \text{antenna gain} - \text{beam forming gain})$.

5.2 Measurement Procedure

The power output was tested according to DTS test procedure of "KDB558074 D01 DTS Meas Guidance" (clause 10.2) for compliance requirements.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 Test Configuration

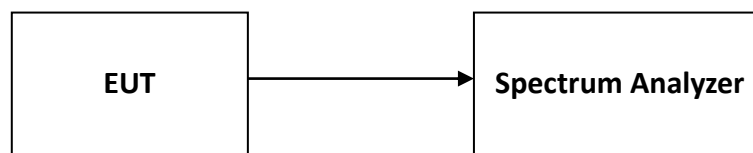

5.4 Test Results of Power spectrum density

Please refer to Appendix.

TEST REPORT

6 Emission outside the frequency band

Test result: Pass

6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

6.2 Measurement Procedure

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 11.0) for compliance requirements.

Reference level measurement

Establish a reference level by using the following procedure:


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Emission level measurement

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

6.3 Test Configuration

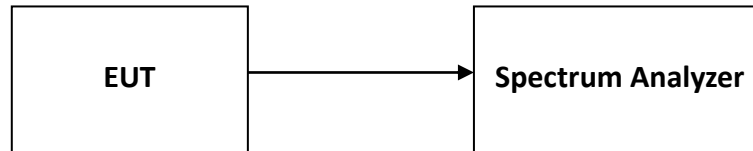

6.4 The results of Emission outside the frequency band

Please refer to Appendix.

7 Radiated Emissions in restricted frequency bands

Test result: Pass

7.1 Limit

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.2 Measurement Procedure

For Radiated emission below 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for

TEST REPORT

above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.


- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- 3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 3 x RBW (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
- 4. All modes of operation were investigated and the worst-case emissions are reported

7.3 Test Configuration


For Radiated emission below 30MHz:

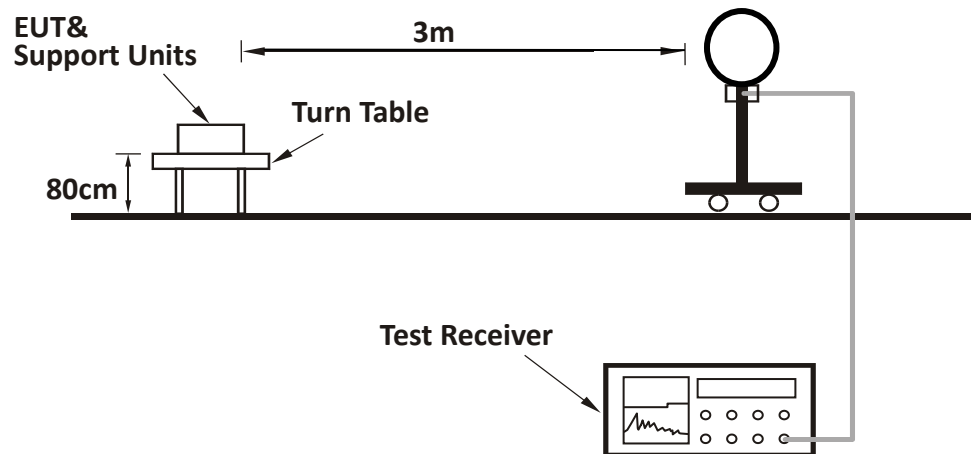

For Radiated emission 30MHz to 1GHz:

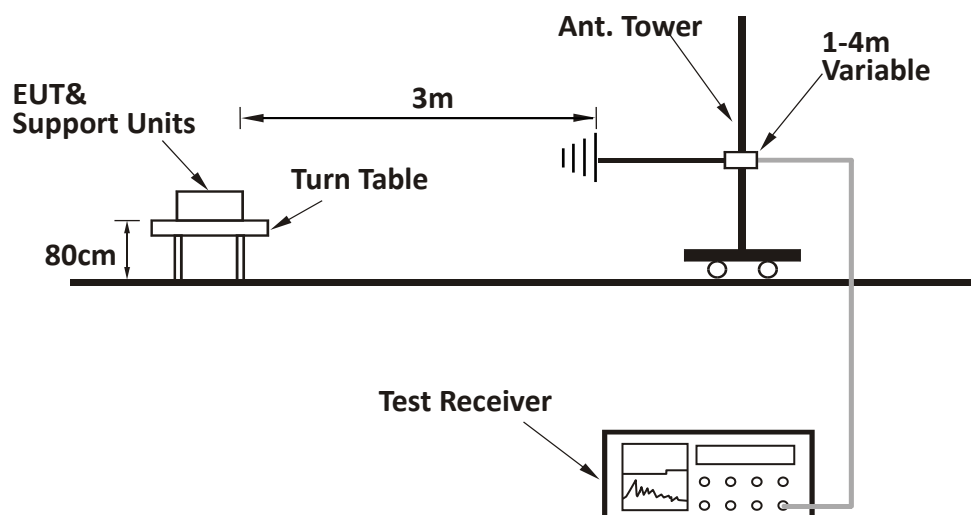

For Radiated emission above 1GHz:

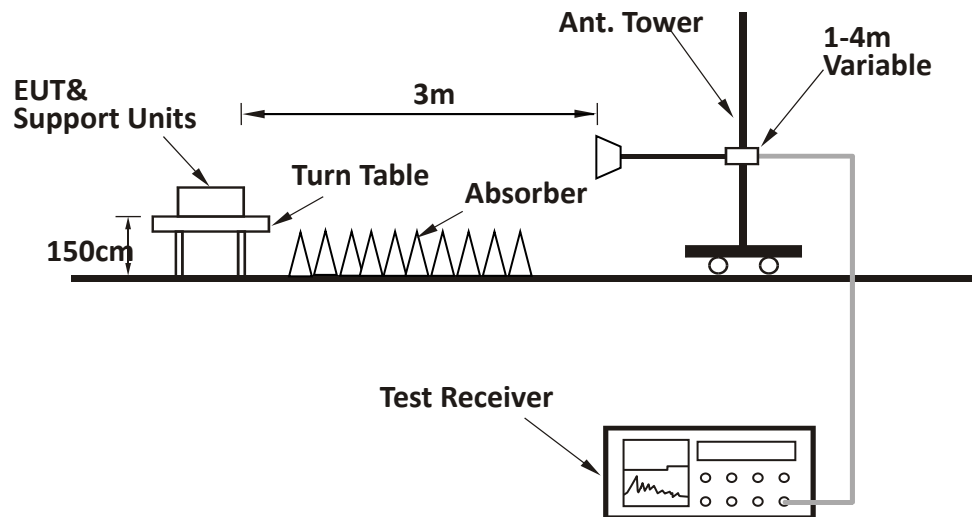


7.4 Test Results of Radiated Emissions

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Test data below 1GHz:

Note: the high channel as the worst case were recorded.

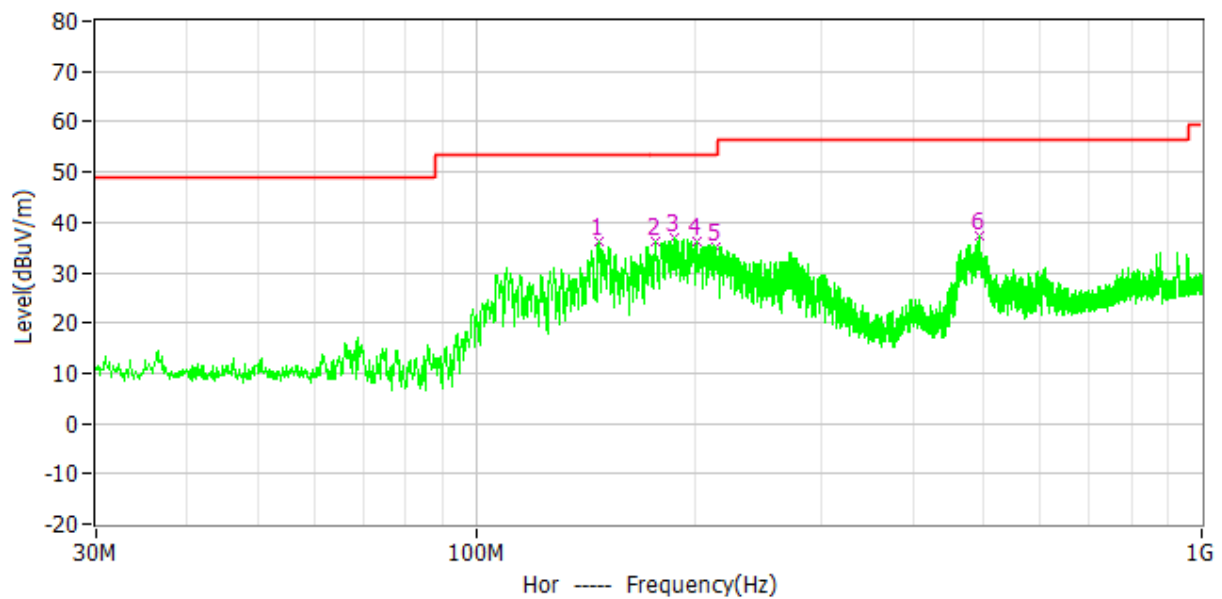


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1*	147.564MHz	53.5	36.0	-17.5	21.5	14.5	QP	Hor
2*	176.761MHz	53.5	36.0	-17.5	22.5	13.5	QP	Hor
3*	188.207MHz	53.5	36.9	-16.6	24.2	12.7	QP	Hor
4*	201.302MHz	53.5	36.3	-17.2	24.4	11.9	QP	Hor
5*	214.106MHz	53.5	35.2	-18.3	22.8	12.4	QP	Hor
6*	493.369MHz	56.5	37.2	-19.3	16.3	20.9	QP	Hor

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor

3. Delta = Level - Limit

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

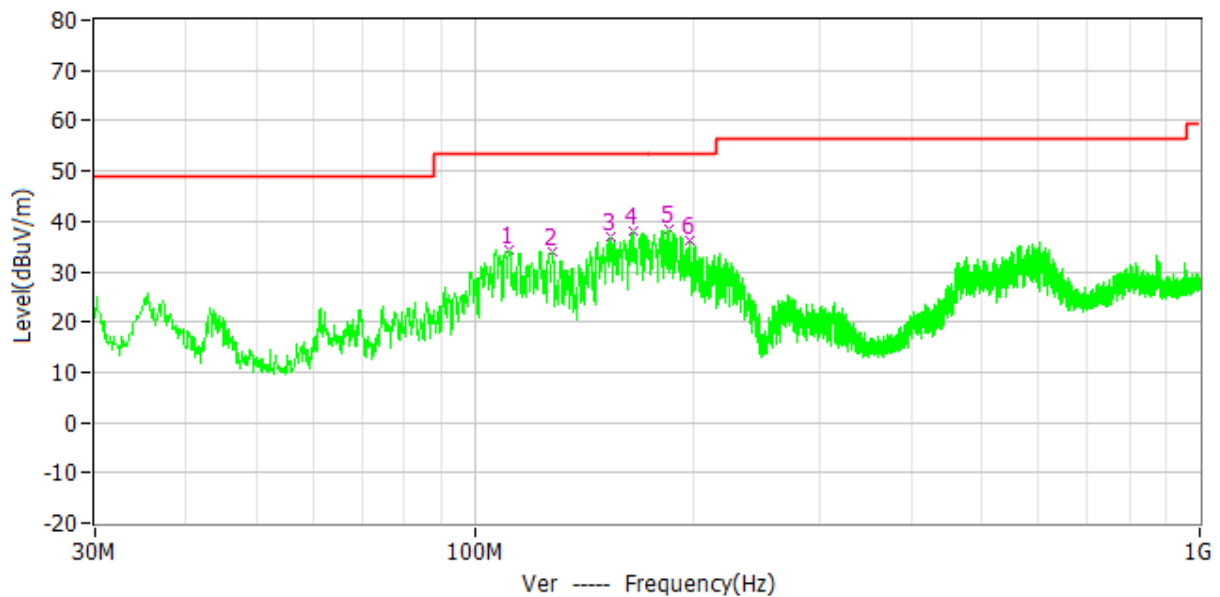

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar
1*	111.674MHz	53.5	34.4	-19.1	23.3	11.1	PK	Ver
2*	128.067MHz	53.5	34.0	-19.5	21.2	12.8	PK	Ver
3*	153.869MHz	53.5	36.9	-16.6	22.3	14.6	PK	Ver
4*	165.218MHz	53.5	37.9	-15.6	23.5	14.4	PK	Ver
5*	185.006MHz	53.5	38.3	-15.2	25.4	12.9	PK	Ver
6*	197.810MHz	53.5	36.0	-17.5	24.1	11.9	PK	Ver

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor

3. Delta = Level - Limit



4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

TEST REPORT

Test result above 1GHz:

The emission was conducted from 1GHz to 25GHz:

The test plots of the high channel as the worst case were recorded.

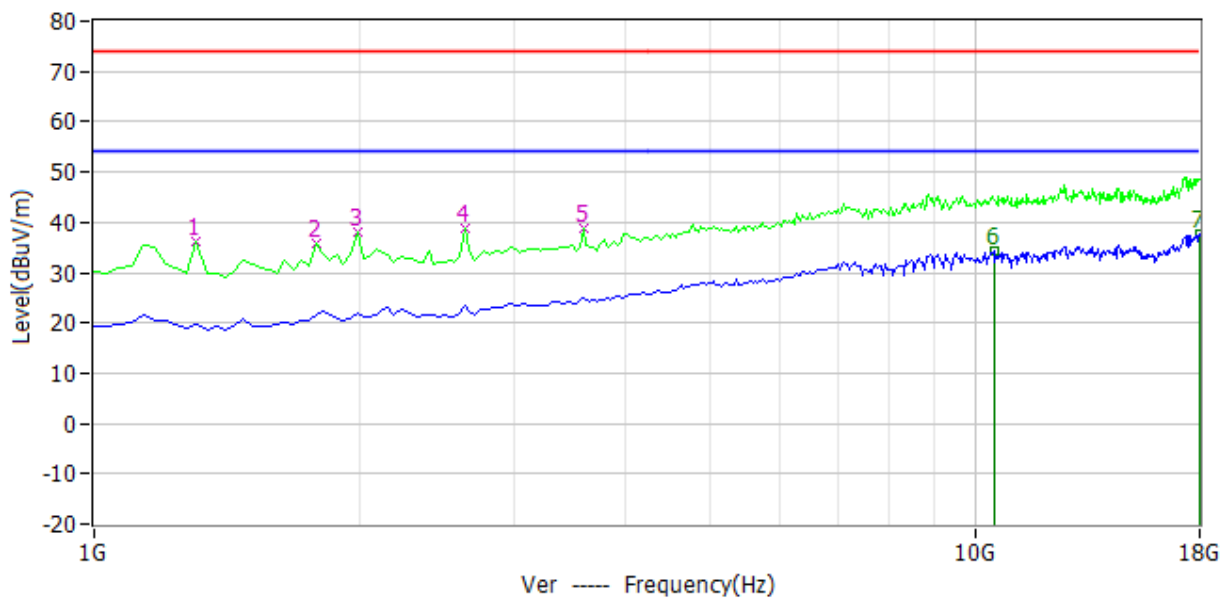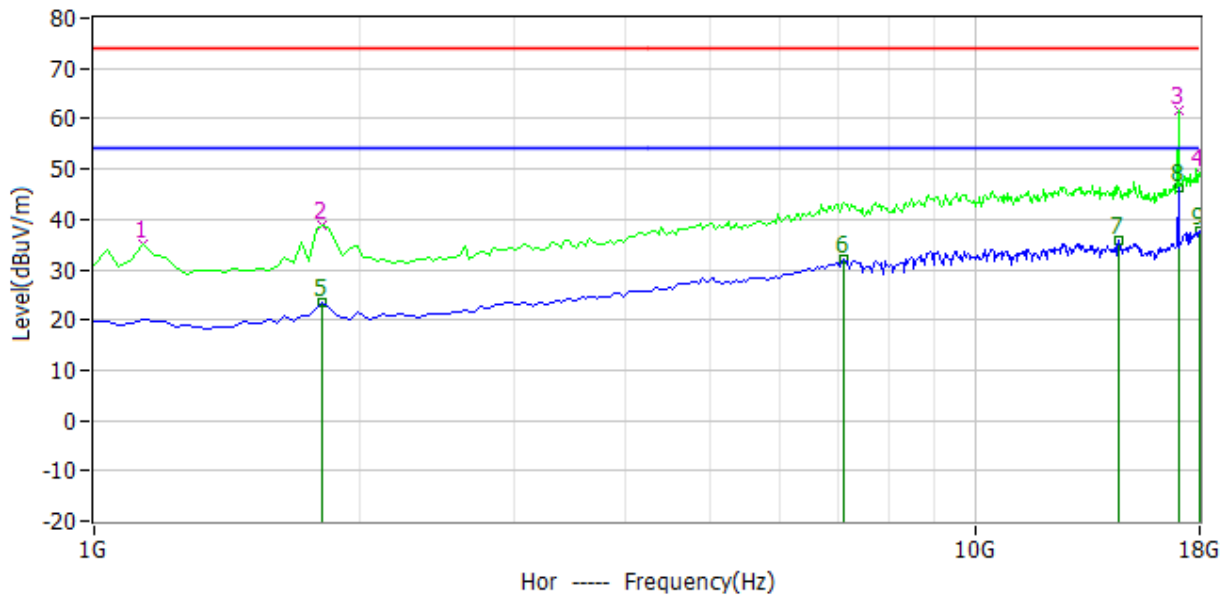

TEST REPORT

CH	Antenna	Frequency	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	1.812GHz	39.84	-22.39	74.00	34.16	PK
	H	2.635GHz	39.49	-19.07	74.00	34.51	PK
	H	17.830GHz	49.32	5.93	74.00	24.68	PK
	V	1.988GHz	39.04	-22.09	74.00	34.96	PK
	V	2.635GHz	40.54	-19.07	74.00	33.46	PK
	V	3.589GHz	39.35	-16.49	74.00	34.65	PK
	V	4.782GHz	43.32	-12.01	74.00	30.68	PK
	V	17.319GHz	50.01	4.96	74.00	23.99	PK
M	H	1.818GHz	38.69	-22.39	74.00	35.31	PK
	H	12.208GHz	51.84	-0.73	74.00	22.16	PK
	H	17.932GHz	49.20	6.31	74.00	24.8	PK
	V	1.170GHz	36.16	-24.00	74.00	37.84	PK
	V	1.818GHz	36.18	-22.39	74.00	37.82	PK
	V	1.988GHz	40.50	-22.09	74.00	33.5	PK
	V	2.635GHz	41.69	-19.07	74.00	32.31	PK
	V	17.966GHz	50.07	6.55	74.00	23.93	PK
H	H	1.136GHz	35.23	-24.06	74.00	38.77	PK
	H	1.818GHz	38.73	-22.39	74.00	35.27	PK
	H	17.012GHz	61.49	3.34	74.00	12.51	PK
	H	17.966GHz	49.17	6.55	74.00	24.83	PK
	H	17.012GHz	46.21	3.34	54.00	7.79	AV
	V	1.307GHz	36.09	-23.89	74.00	37.91	PK
	V	1.784GHz	35.98	-22.51	74.00	38.02	PK
	V	1.988GHz	37.94	-22.09	74.00	36.06	PK
	V	2.635GHz	38.81	-19.07	74.00	35.19	PK
	V	3.589GHz	38.91	-16.49	74.00	35.09	PK

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.


8 Power line conducted emission

Test result: Pass

8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	79	66
0.5-30	73	60
* Decreases with the logarithm of the frequency.		

8.2 Test Configuration

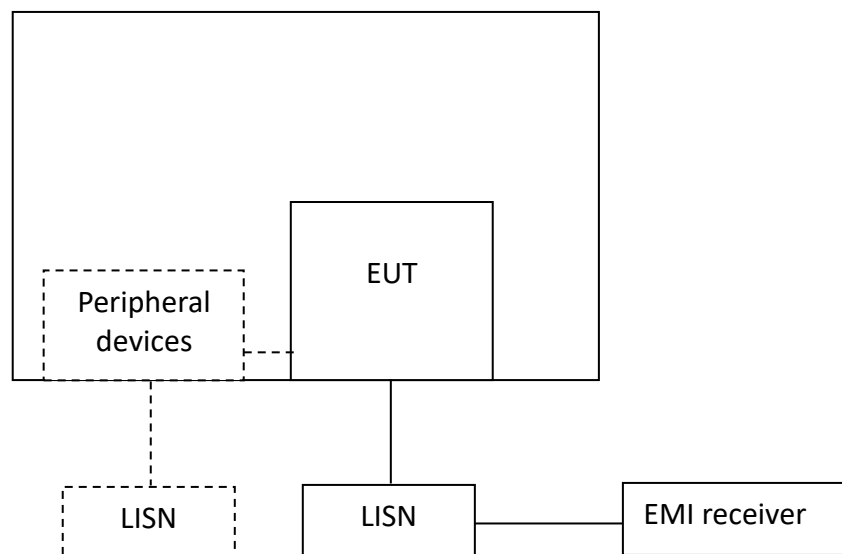

8.3 Measurement Procedure



Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

8.4 Test Results of Power line conducted emission

Test Curve:

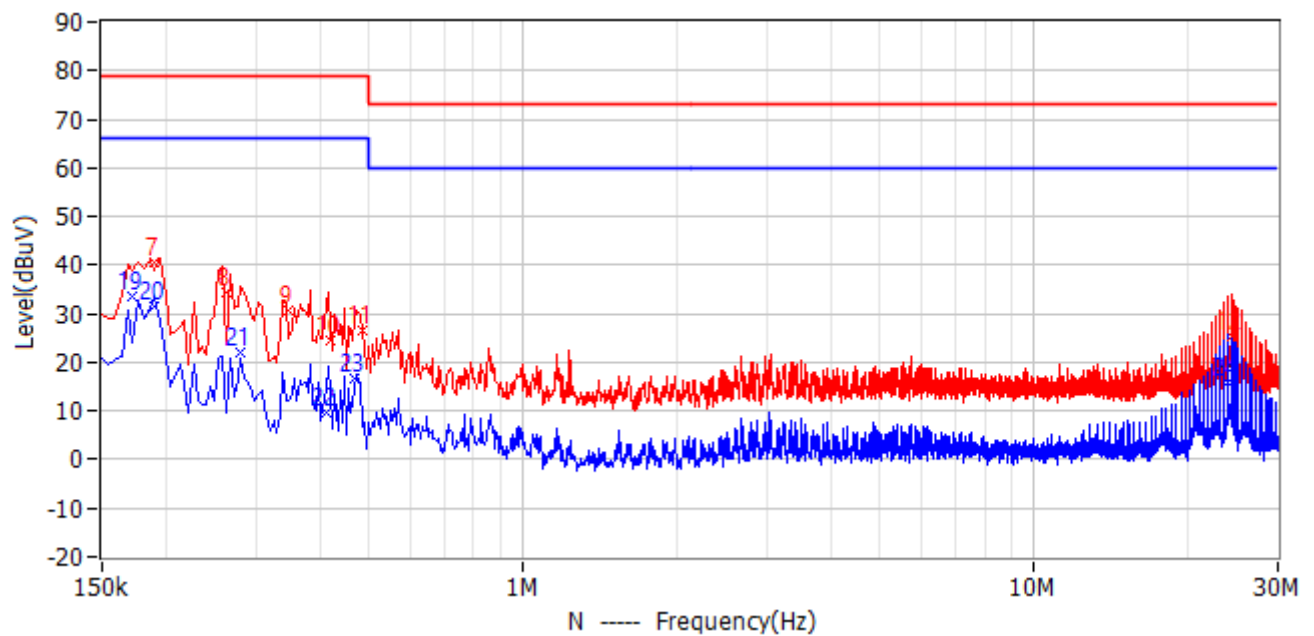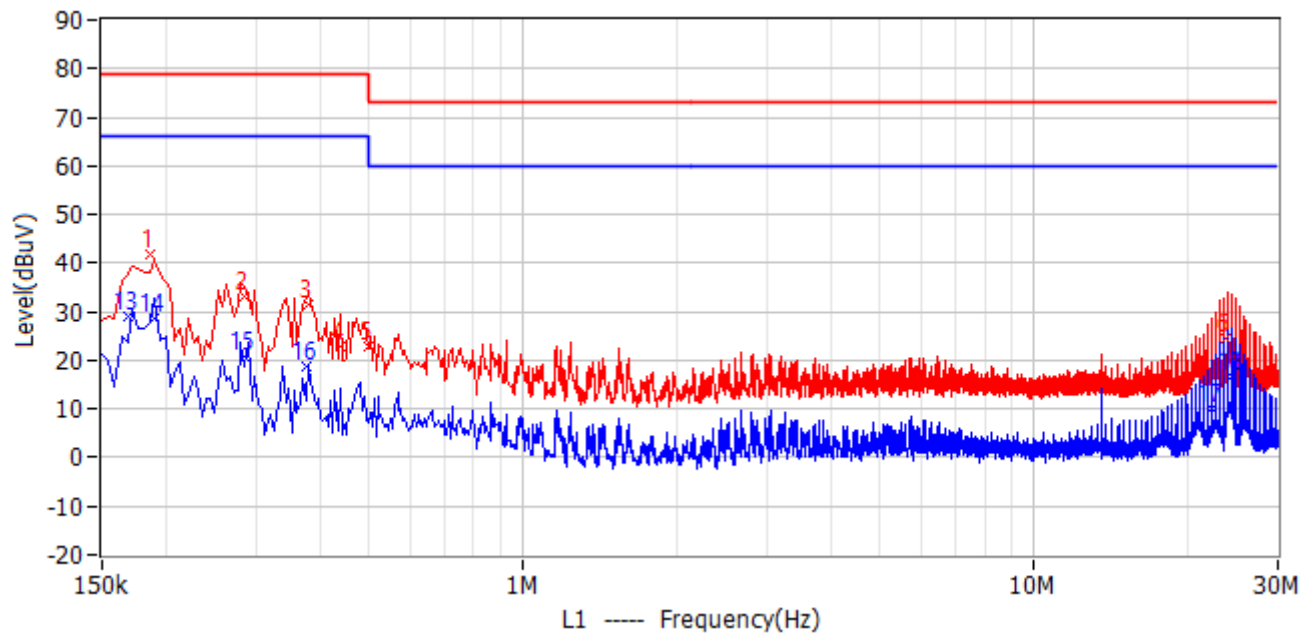

TEST REPORT

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
1	186.000kHz	79.00	41.75	-37.25	31.55	10.20	QP	L1
2	285.000kHz	79.00	32.95	-46.05	22.75	10.20	QP	L1
3	379.500kHz	79.00	31.40	-47.60	21.20	10.20	QP	L1
4	438.000kHz	79.00	22.68	-56.32	12.48	10.20	QP	L1
5	496.500kHz	79.00	23.02	-55.98	12.82	10.20	QP	L1
6	23.753MHz	73.00	24.54	-48.46	12.84	11.70	QP	L1
7	190.500kHz	79.00	40.47	-38.53	30.37	10.10	QP	N
8	262.500kHz	79.00	34.49	-44.51	24.39	10.10	QP	N
9	348.000kHz	79.00	30.75	-48.25	20.55	10.20	QP	N
10	420.000kHz	79.00	24.35	-54.65	14.15	10.20	QP	N
11	483.000kHz	79.00	26.64	-52.36	16.44	10.20	QP	N
12	24.324MHz	73.00	25.26	-47.74	13.66	11.60	QP	N
13	168.000kHz	66.00	28.83	-37.17	18.63	10.20	CAV	L1
14	190.500kHz	66.00	28.82	-37.18	18.62	10.20	CAV	L1
15	285.000kHz	66.00	20.92	-45.08	10.72	10.20	CAV	L1
16	375.000kHz	66.00	18.91	-47.09	8.71	10.20	CAV	L1
17	22.218MHz	60.00	10.24	-49.76	-1.46	11.70	CAV	L1
18	24.329MHz	60.00	16.51	-43.49	4.81	11.70	CAV	L1
19	172.500kHz	66.00	33.55	-32.45	23.45	10.10	CAV	N
20	190.500kHz	66.00	31.36	-34.64	21.26	10.10	CAV	N
21	280.500kHz	66.00	21.96	-44.04	11.86	10.10	CAV	N
22	411.000kHz	66.00	9.73	-56.27	-0.47	10.20	CAV	N
23	469.500kHz	66.00	16.70	-49.30	6.50	10.20	CAV	N
24	23.906MHz	60.00	15.85	-44.15	4.25	11.60	CAV	N

- Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
2. Level = Original Receiver Reading + Correct Factor
3. Delta = Level - Limit
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

9 Occupied Bandwidth

Test result: Tested

9.1 Limit

None


9.2 Measurement Procedure

The occupied bandwidth per RSS-Gen was measured using the Spectrum Analyzer.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

9.3 Test Configuration

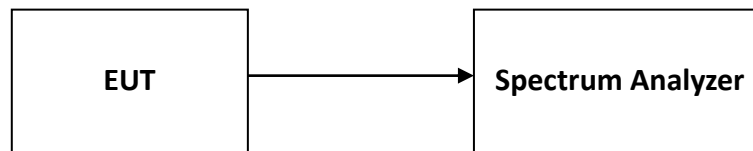

9.4 The results of Occupied Bandwidth

Please refer to Appendix.

10 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

***** END *****