

TEST REPORT

Applicant Name: SHENZHEN TENDA TECHNOLOGY CO., LTD.
Address: 6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road,
Nanshan District, Shenzhen, China. 518052
Report Number: 2601S56424E-RF-00B
FCC ID: V7TCH9V2

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: 6MP Dual-lens Linkage Wi-Fi Pan/Tilt Camera
Model No.: CH9-WCA
Multiple Model(s) No.: CH9-WCAV2
Trade Mark: Tenda
Date Received: 2026/05/06
Issue Date: 2026/07/08

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Wills Yu

Wills Yu
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked * is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.
This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
REQUIREMENTS AND TEST PROCEDURES	13
AC LINE CONDUCTED EMISSIONS	13
UNWANTED EMISSION FREQUENCIES AND RESTRICTED BANDS	15
6 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	18
PEAK OUTPUT POWER MEASUREMENT	20
POWER SPECTRAL DENSITY	21
100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	22
CONDUCTED SPURIOUS EMISSION	23
DUTY CYCLE	24
RF EXPOSURE EVALUATION	25
ANTENNA REQUIREMENT	27
TEST DATA AND RESULTS	28
AC LINE CONDUCTED EMISSIONS	28
UNWANTED EMISSION FREQUENCIES AND RESTRICTED BANDS	33
RF CONDUCTED DATA	116
6dB Emission Bandwidth	117
99% Occupied Bandwidth	120
Maximum Conducted Output Power	123
Power Spectral Density	126
100 kHz Bandwidth of Frequency Band Edge	129
Conducted Spurious Emission	131
Duty Cycle	133
EUT PHOTOGRAPHS	135
TEST SETUP PHOTOGRAPHS	136

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2601S56424E-RF-00B	Original Report	2026/07/08

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	6MP Dual-lens Linkage Wi-Fi Pan/Tilt Camera
Tested Model	CH9-WCA
Multiple Model(s)	CH9-WCAV2
Frequency Range	2402~2480MHz
Maximum Conducted Output Peak Power	6.19dBm
Modulation Technique	GFSK
Antenna Specification[#]	1.98dBi (provided by the applicant)
Voltage Range	DC 12V from adapter or DC 48-54V from POE
Sample serial number	3L8Z-9 for AC Line Conducted Emissions and Radiated Emissions Test 3L8Z-2 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Model: BN073-A12012U Input:100-240V~50/60Hz 0.4A Output:12V = 1A
Note: The Multiple models are electrically identical with the test model except for model name various distribution channels. Please refer to the declaration letter [#] for more detail, which was provided by manufacturer.	

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.207, 15.205, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		52.29kHz(k=1.96, 95% level of confidence)
RF output power, conducted		1.57dB(k=1.96, 95% level of confidence)
Power Spectral Density		2.09dB(k=1.96, 95% level of confidence)
Conducted Spurious Emission		2.48dB(k=1.96, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.46dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.72dB(k=2, 95% level of confidence)
Radiated Emissions	0.009MHz~30MHz	3.66dB(k=2, 95% level of confidence)
	30MHz~1000MHz (Horizontal)	5.10dB(k=2, 95% level of confidence)
	30MHz~1000MHz (Vertical)	6.28dB(k=2, 95% level of confidence)
	1GHz - 6GHz	6.18dB(k=2, 95% level of confidence)
	6GHz - 18GHz	6.62dB(k=2, 95% level of confidence)
	18GHz - 40GHz	6.66dB(k=2, 95% level of confidence)
Temperature		$\pm 0.4^{\circ}\text{C}$
Humidity		$\pm 2\%$
Supply voltages		DC $\pm 0.4\%$; AC $\pm 1\%$

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, test firm registration No.: 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

EUT Exercise Software

Exercise Software [#]	SecureCRT		
Power Level [#]			
Mode	Low Channel	Middle Channel	High Channel
BLE 1M	0x68	0x68	0x68
BLE 2M	0x68	0x68	0x68
BLE 125K(LE S8)	0x68	0x68	0x68
BLE 500K(LE S2)	0x68	0x68	0x68

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
PHILIPS	MicroSD Card	Unknown	Unknown
DELL	PC	DESKTOP-JPLK16R	5WBFD32
Yealink	PoE	YLPOE30	/


External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Un-detachable DC Cable	1.5	Adapter	EUT
Unshielded Un-detachable AC Cable	1.2	Socket	AC Mains/LISN
Unshielded Detachable AC Cable	1.2	POE	AC Mains/LISN
Unshielded Detachable RJ45 Cable	10.0	EUT	PC
Unshielded Detachable RJ45 Cable	1.5	EUT	PoE
Unshielded Detachable RJ45 Cable	10.0	PC	PoE


Block Diagram of Test Setup

For AC Line Conducted Emissions:

From adapter

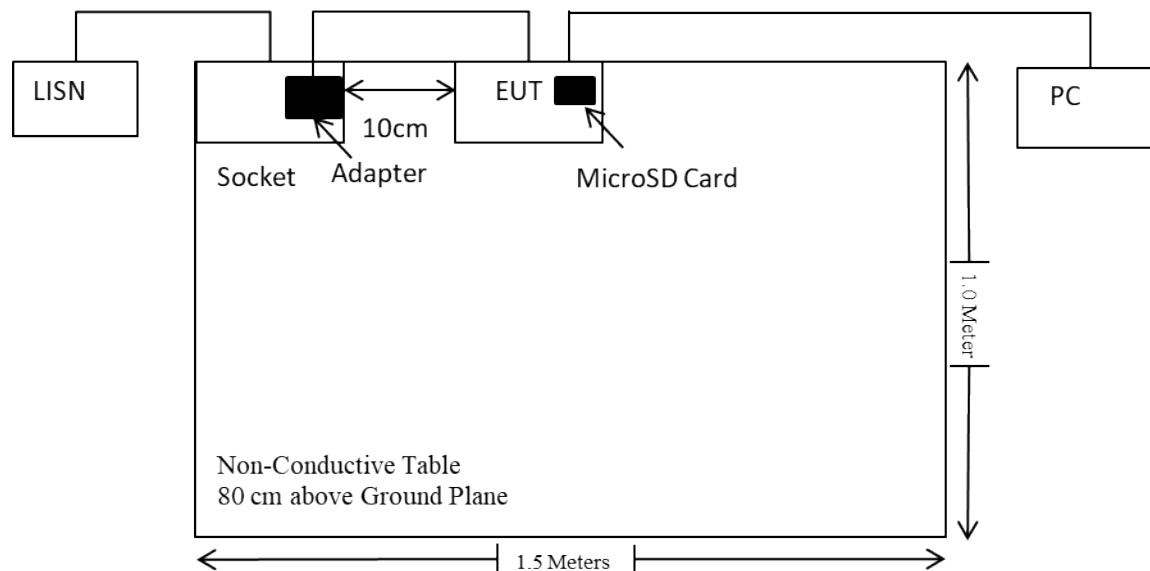


From PoE

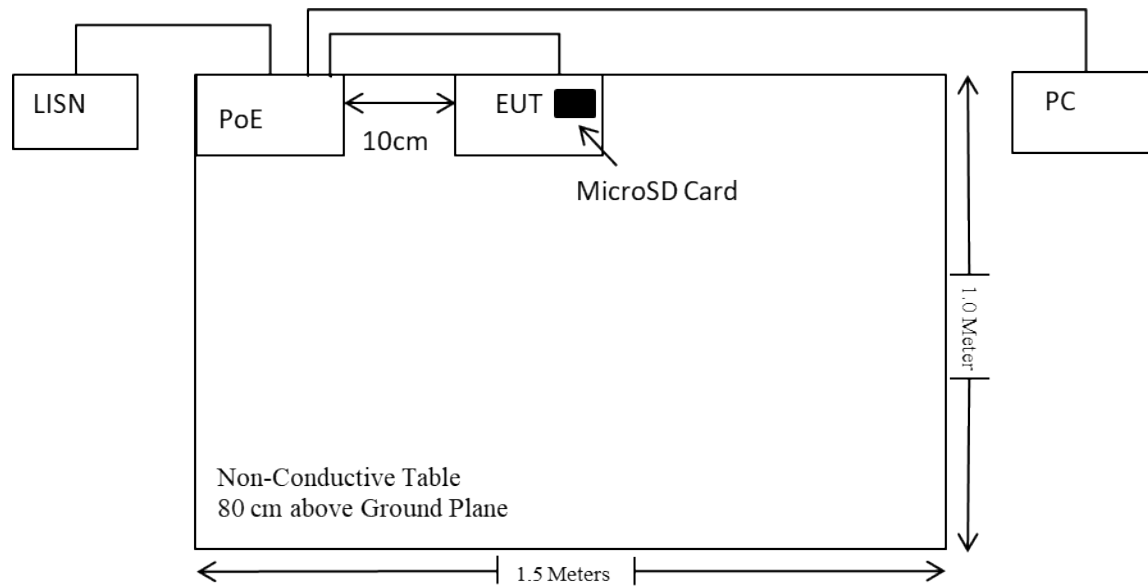


For Radiated Emissions below 1GHz:


From adapter

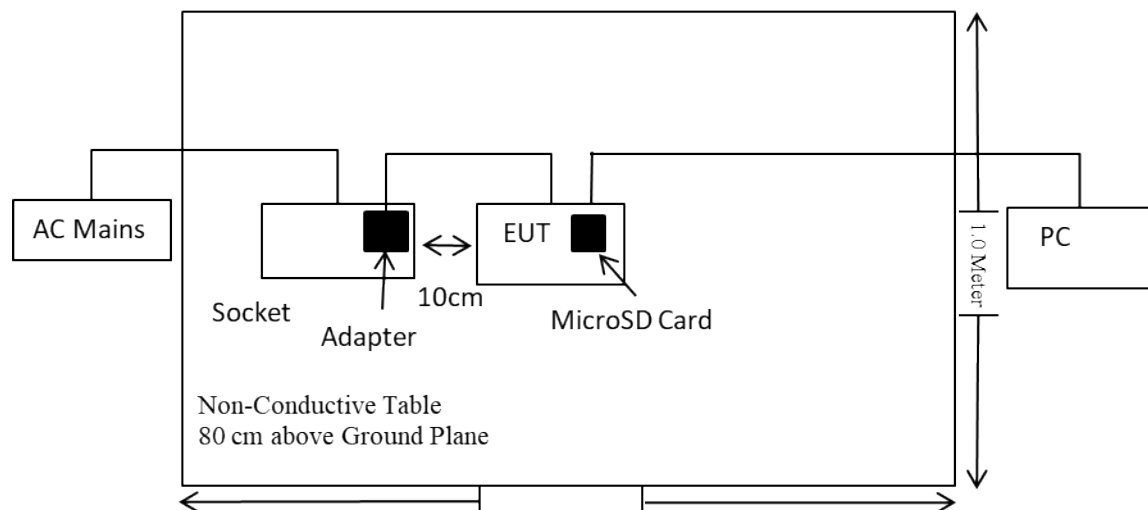

From PoE

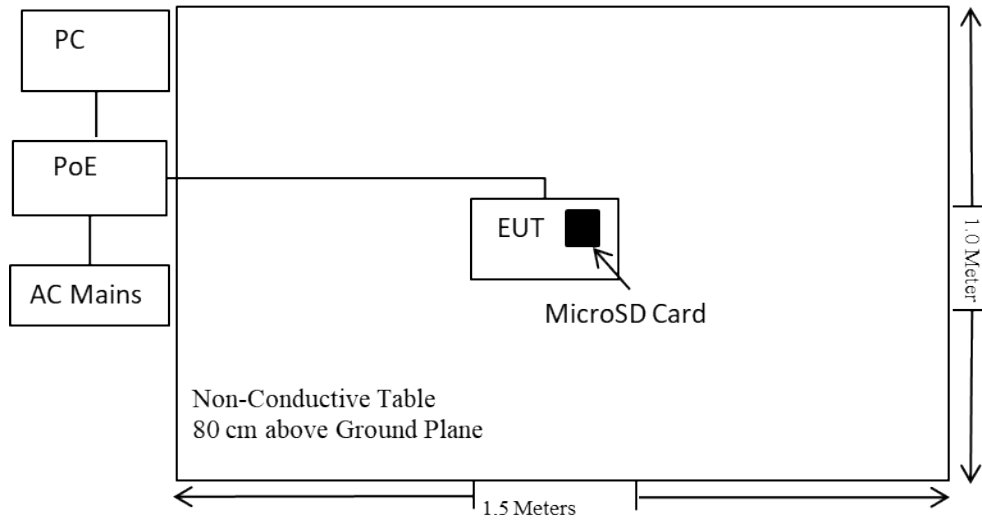

For Radiated Emissions above 1GHz:

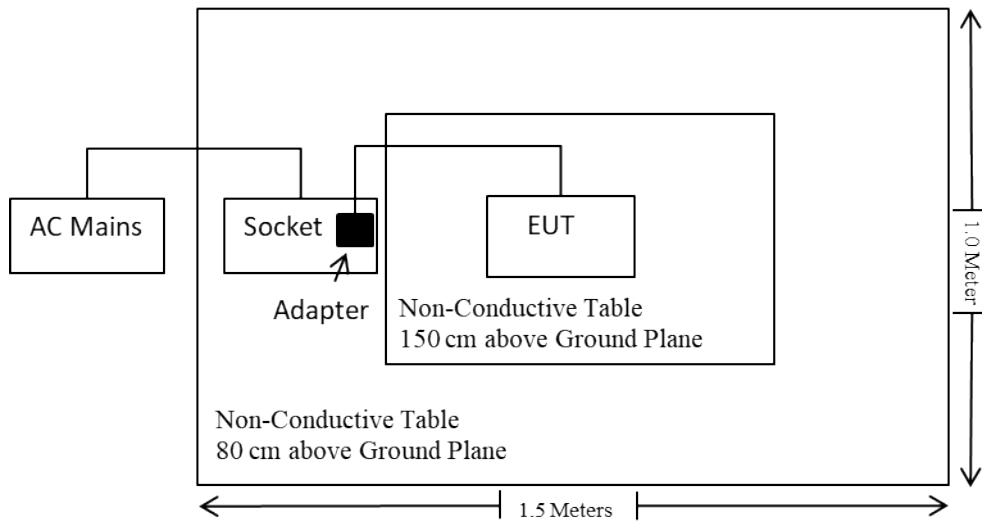

SUMMARY OF TEST RESULTS

Test Rules	Description of Test	Result
§1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(d)	Conducted Spurious Emission	Compliant
C63.10 §11.6	Duty Cycle	/

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2025/09/01	2026/08/31
Rohde & Schwarz	LISN	ENV216	101613	2025/09/18	2026/09/17
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2025/09/18	2026/09/17
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2025/09/18	2026/09/17
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
Radiated Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2025/09/01	2026/08/31
Sonoma instrument	Pre-amplifier	310 N	186238	2025/09/08	2026/09/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Chamber A Cable	Cable A1	Cable A1	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A2	Cable A2	2025/09/08	2026/09/07
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Chamber A Cable	Cable A3	Cable A3	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A4	Cable A4	2025/09/08	2026/09/07
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
TDK	Chamber	Chamber A	2#	2023/07/12	2026/07/11
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2025/09/01	2026/08/31
A.H.System	Preamplifier	PAM-0118P	489	2025/09/08	2026/09/07
Schwarzbeck	Horn Antenna	BBHA9120D (1201)	1143	2023/07/26	2026/07/25
Unknown	Chamber B Cable	Cable B1	Cable B1	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B2	Cable B2	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B3	Cable B3	2025/09/08	2026/09/07
JD	Filter Switch Unit	DT7220FSU	DS79906	2025/08/12	2026/08/11
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2025/08/12	2026/08/11
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
TDK	Chamber	Chamber B	1#	2023/07/14	2026/07/13
A.H.System	Pre-amplifier	PAM-1840VH	190	2025/09/08	2026/09/07
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
Unknown	Chamber B Cable	Cable B4	Cable B4	2025/09/17	2026/09/16

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Chamber B Cable	Cable B5	Cable B5	2025/09/17	2026/09/16
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101942	2025/09/01	2026/08/31
JD	JD Auto Test software	NA	1.0.0.3769	NCR	NCR
Unknown	10dB Attenuator	Unknown	F-03-EM224	2025/06/26	2026/06/25

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).


REQUIREMENTS AND TEST PROCEDURES

AC Line Conducted Emissions

Applicable Standard

FCC§15.207

EUT Setup

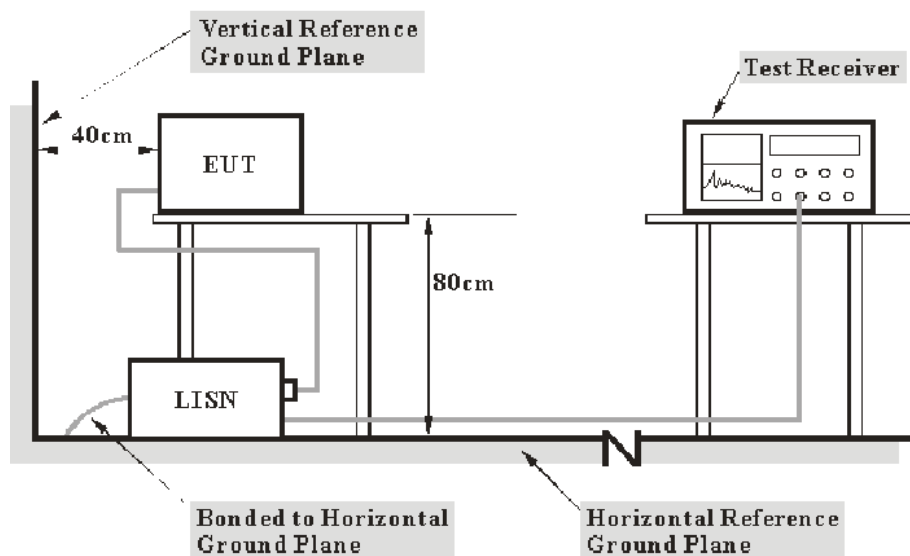

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).


Unwanted Emission Frequencies and Restricted Bands

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;


EUT Setup

9 kHz-30MHz:

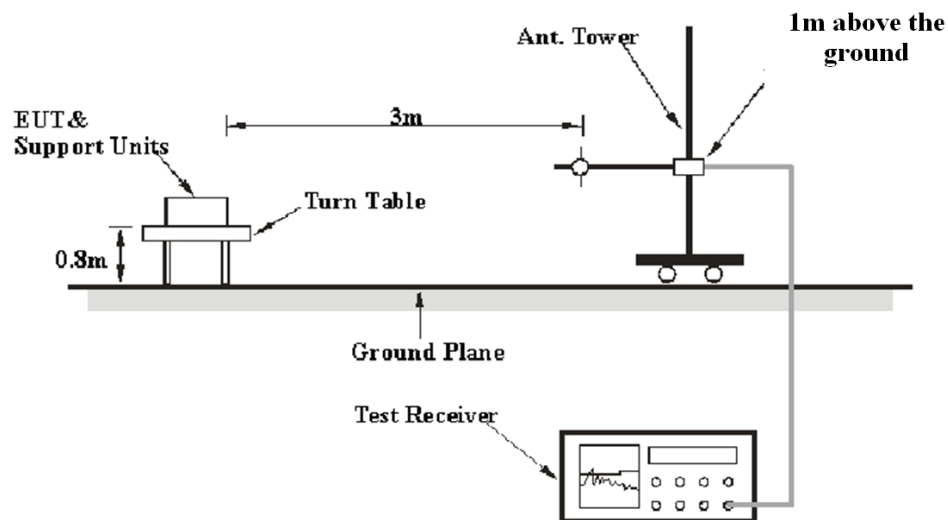

30MHz-1GHz:

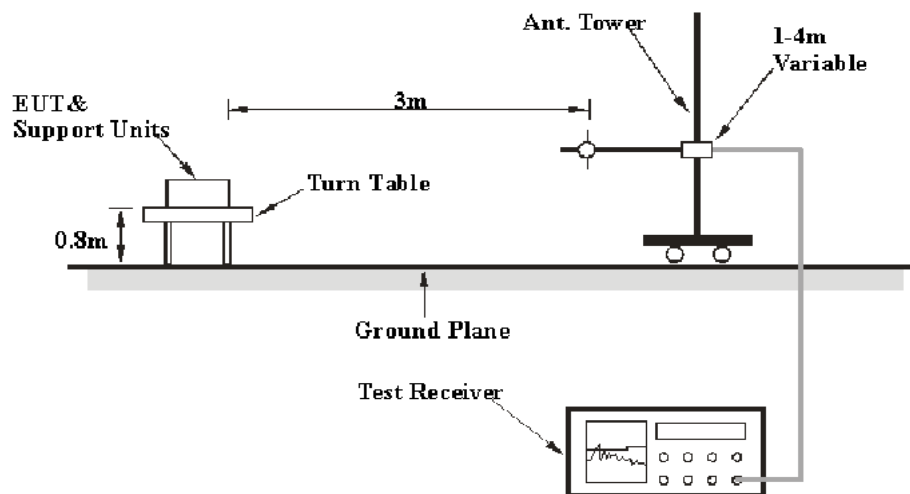

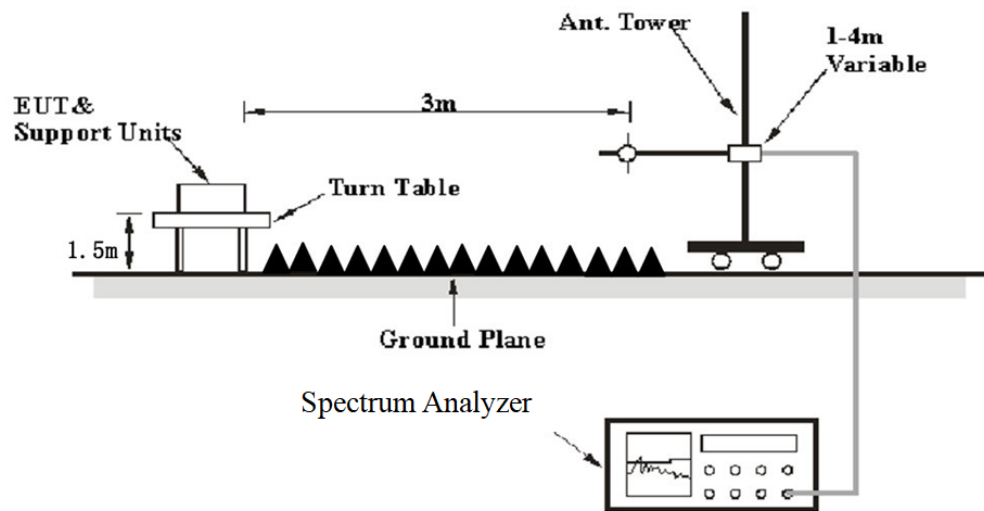Above 1GHz:

The radiated emission tests were performed in the 3meters test site, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.205, FCC 15.209, FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	Peak
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	Peak
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	120 kHz	500 kHz	/	PK	Peak

1-25GHz:**Pre-scan**

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	1 kHz	Peak
	<98%	1MHz	>1/Ton, not less than 1kHz	Peak

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	10 Hz	Peak
	<98%	1MHz	≥1/Ton	Peak

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level / Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

6 dB Emission Bandwidth & 99% Occupied Bandwidth

Standard Applicable

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

Test Method: ANSI C63.10-2020 Clause 11.8.1 & Clause 6.9.3

The steps for the first option are as follows:


- a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “–6 dB down amplitude”. If a marker is below this “–6 dB down amplitude” value, then it shall be as close as possible to this value.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

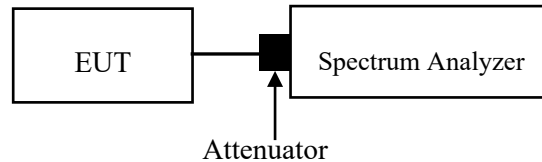

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Peak Output Power Measurement

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.


Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

Test Method: ANSI C63.10-2020 Clause 11.9.1.1

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the $RBW \geq DTS$ bandwidth.
- b) Set $VBW \geq [3 \times RBW]$.
- c) Set $span \geq [3 \times RBW]$.
- d) Sweep time = No faster than coupled (auto) time.
- e) Detector = peak.
- f) Trace mode = max-hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

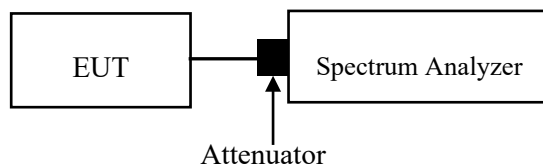

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable loss

Note 2: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Power Spectral Density

Applicable Standard

According to FCC §15.247(e):


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

Test Method: ANSI C63.10-2020 Clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span >1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = No faster than coupled (auto) time.
- g) Trace mode = max-hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

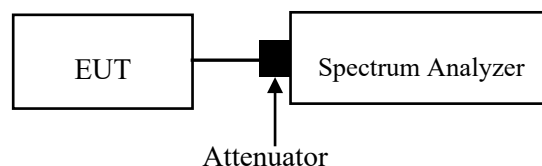

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable loss

Note 2: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

100 kHz Bandwidth of Frequency Band Edge

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2020 Clause 11.11.3


Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.

NOTE—the number of points can also be increased for large spans to retain frequency resolution

- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = No faster than coupled (auto) time.
- f) Trace mode = max-hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

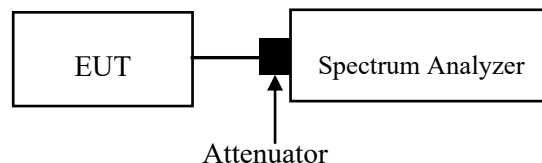

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Conducted Spurious Emission

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2020 Clause 11.11.3


Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.

NOTE—the number of points can also be increased for large spans to retain frequency resolution

- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = No faster than coupled (auto) time.
- f) Trace mode = max-hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

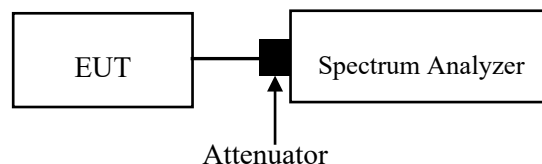

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the worst case cable loss was add with offset into test equipment, the total offset consists of attenuator and RF cable.

Note: The worst cable loss among the test frequency range was added into plots.


Duty Cycle

Test Procedure

According to ANSI C63.10-2020 Section 11.6

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

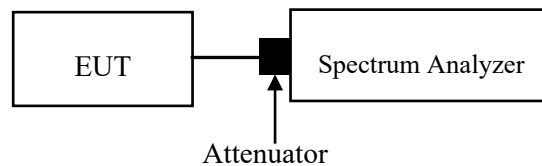

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

RF EXPOSURE EVALUATION

MPE-Based Exemption

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 v01 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(3)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Result

Mode	Frequency (MHz)	Tune up conducted power [#] (dBm)	Antenna Gain#		ERP		Evaluation Distance (m)	ERP Limit (W)
			(dBi)	(dBd)	(dBm)	(W)		
BLE	2402-2480	7	1.98	-0.17	6.83	0.005	0.2	0.768
2.4G WIFI	2412-2462	23	1.98	-0.17	22.83	0.192	0.2	0.768

Note: The tune up conducted power and antenna gain was declared by the applicant.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached, the antenna gain[#] is 1.98dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant


TEST DATA AND RESULTS

AC Line Conducted Emissions

Environmental Conditions

Temperature (°C)	24.2	Relative Humidity (%)	59
ATM Pressure (kPa)	100.1	Test engineer	Macy Shi
Test date	2026.5.20		
EUT operation mode	Transmitting(Maximum output power mode, BLE 500kbps Low Channel)		

AC 120V 60 Hz, Line-Adapter

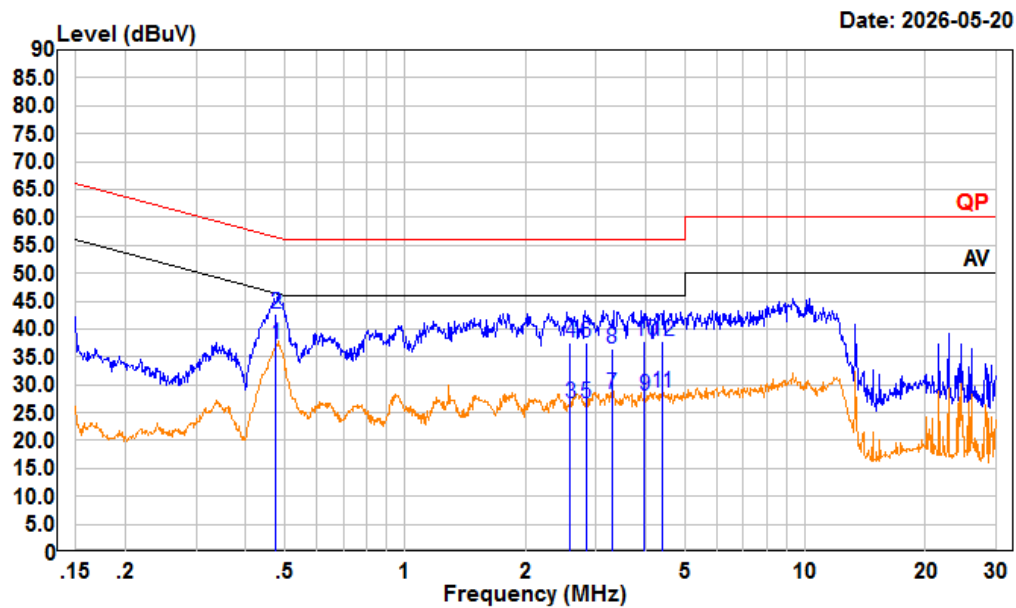

Condition: Line


Project : 2601S56424E-RF

tester : Macy.shi Note: BLE Transmitting

Setting : RBW:9kHz

	Freq	Read Level	LISN Level	Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.476	17.42	37.15	9.70	10.03	46.41	-9.26	Average
2	0.476	23.06	42.79	9.70	10.03	56.41	-13.62	QP
3	2.581	6.55	26.65	9.90	10.20	46.00	-19.35	Average
4	2.581	17.33	37.43	9.90	10.20	56.00	-18.57	QP
5	2.839	6.47	26.57	9.90	10.20	46.00	-19.43	Average
6	2.839	17.44	37.54	9.90	10.20	56.00	-18.46	QP
7	3.284	8.22	28.33	9.90	10.21	46.00	-17.67	Average
8	3.284	16.22	36.33	9.90	10.21	56.00	-19.67	QP
9	3.975	7.84	27.95	9.90	10.21	46.00	-18.05	Average
10	3.975	17.57	37.68	9.90	10.21	56.00	-18.32	QP
11	4.383	8.40	28.52	9.90	10.22	46.00	-17.48	Average
12	4.383	17.76	37.88	9.90	10.22	56.00	-18.12	QP

AC 120V 60 Hz, Neutral-Adapter

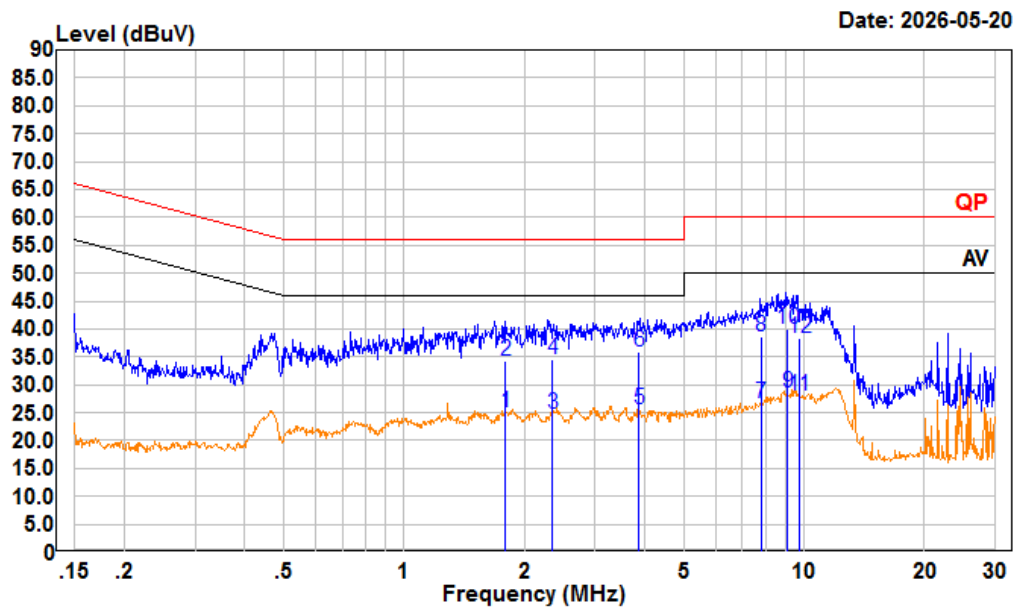

Condition: neutral


Project : 2601S56424E-RF

tester : Macy.shi Note: BLE Transmitting

Setting : RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	1.794	5.11	24.91	9.60	10.20	46.00	-21.09	Average
2	1.794	14.43	34.23	9.60	10.20	56.00	-21.77	QP
3	2.351	4.95	24.75	9.60	10.20	46.00	-21.25	Average
4	2.351	14.72	34.52	9.60	10.20	56.00	-21.48	QP
5	3.867	5.79	25.60	9.60	10.21	46.00	-20.40	Average
6	3.867	16.06	35.87	9.60	10.21	56.00	-20.13	QP
7	7.815	6.62	26.61	9.70	10.29	50.00	-23.39	Average
8	7.815	18.73	38.72	9.70	10.29	60.00	-21.28	QP
9	9.099	8.51	28.52	9.70	10.31	50.00	-21.48	Average
10	9.099	20.03	40.04	9.70	10.31	60.00	-19.96	QP
11	9.723	7.99	28.02	9.70	10.33	50.00	-21.98	Average
12	9.723	18.37	38.40	9.70	10.33	60.00	-21.60	QP

AC 120V 60 Hz, Line-POE

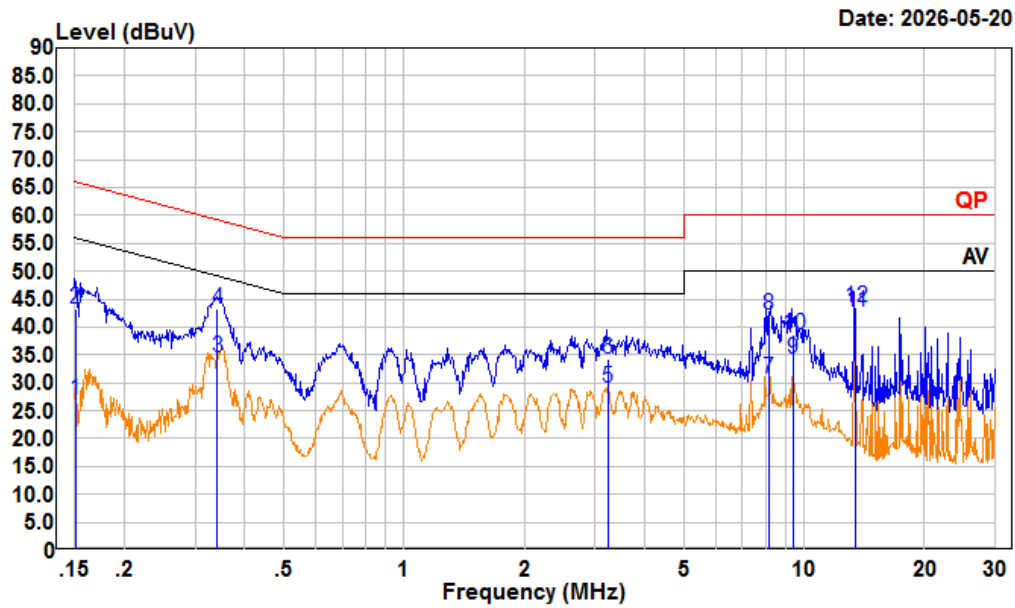

Condition: Line


Project : 2601S56424E-RF

tester : Macy.shi Note: BLE Transmitting

Setting : RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.151	7.11	26.83	9.70	10.02	55.94	-29.11	Average
2	0.151	23.53	43.25	9.70	10.02	65.94	-22.69	QP
3	0.341	14.77	34.56	9.76	10.03	49.18	-14.62	Average
4	0.341	23.42	43.21	9.76	10.03	59.18	-15.97	QP
5	3.228	8.90	29.01	9.90	10.21	46.00	-16.99	Average
6	3.228	14.07	34.18	9.90	10.21	56.00	-21.82	QP
7	8.164	10.46	30.66	9.90	10.30	50.00	-19.34	Average
8	8.164	21.90	42.10	9.90	10.30	60.00	-17.90	QP
9	9.389	14.13	34.35	9.90	10.32	50.00	-15.65	Average
10	9.389	18.54	38.76	9.90	10.32	60.00	-21.24	QP
11	13.480	22.36	42.62	9.90	10.36	50.00	-7.38	Average
12	13.480	23.39	43.65	9.90	10.36	60.00	-16.35	QP

AC 120V 60 Hz, Neutral-POE

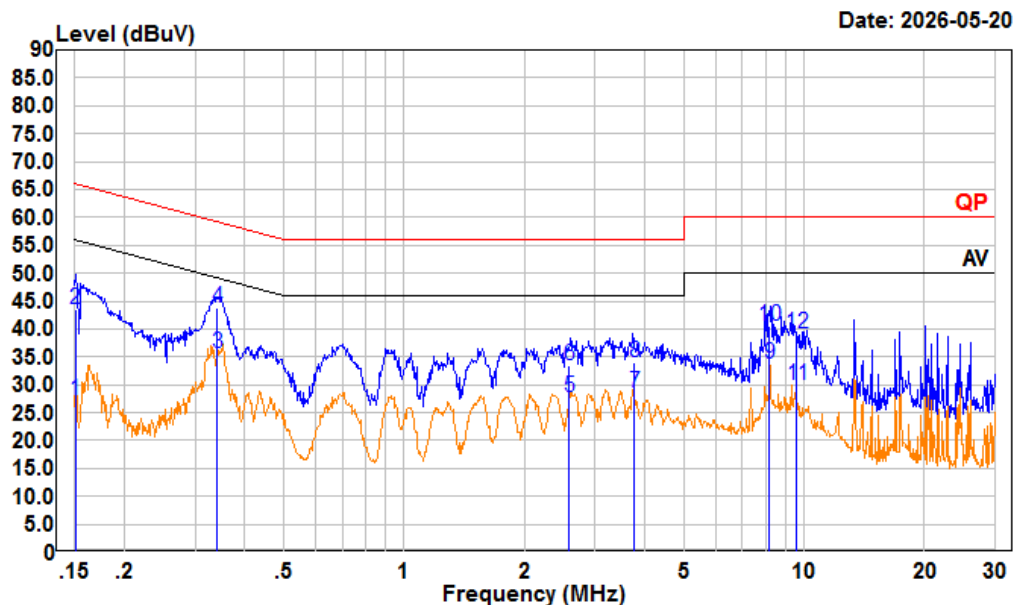

Condition: neutral

Project : 2601S56424E-RF


tester : Macy.shi Note:BLE Transmitting

Setting : RBW:9kHz

	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.151	7.54	27.16	9.60	10.02	55.94	-28.78	Average
2	0.151	23.80	43.42	9.60	10.02	65.94	-22.52	QP
3	0.341	16.00	35.63	9.60	10.03	49.17	-13.54	Average
4	0.341	24.18	43.81	9.60	10.03	59.17	-15.36	QP
5	2.583	7.88	27.68	9.60	10.20	46.00	-18.32	Average
6	2.583	13.70	33.50	9.60	10.20	56.00	-22.50	QP
7	3.760	8.79	28.60	9.60	10.21	46.00	-17.40	Average
8	3.760	14.26	34.07	9.60	10.21	56.00	-21.93	QP
9	8.172	13.83	33.83	9.70	10.30	50.00	-16.17	Average
10	8.172	20.53	40.53	9.70	10.30	60.00	-19.47	QP
11	9.580	10.00	30.02	9.70	10.32	50.00	-19.98	Average
12	9.580	19.13	39.15	9.70	10.32	60.00	-20.85	QP

Unwanted Emission Frequencies and Restricted Bands**Environmental Conditions**


Temperature (°C)	23.4~24.7&24.7	Relative Humidity (%)	50~55&55
ATM Pressure (kPa):	100.3~101.5&101.5	Test engineer:	Anson Su & Alex Yan & Zenos Qiao
Test date:	2026.05.20~2026.06.25&2026.06.25		
EUT operation mode:	Below 1GHz: Transmitting(Maximum output power mode, BLE 500kbps Low Channel) Above 1GHz: Transmitting		
Note:	1. For the radiated spurious emission below 30MHz, only the worst case (parallel) was recorded. 2. For the radiated spurious emission below 1GHz, When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded. 3. The orientation of the EUT has been pre adjusted to allow for measuring the maximum emission of the EUT.		

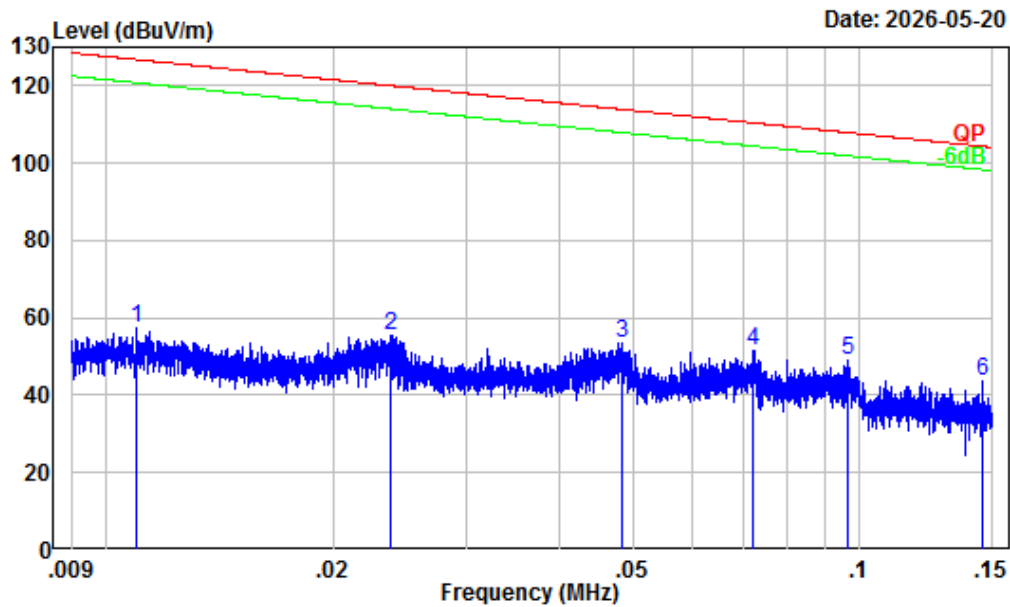Below 1GHz:**9kHz-150kHz-Adapter**

Site : Chamber A
Condition : 3m
Project Number : 2601S56424E-RF
Test Mode : BLE Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	0.011	32.12	25.13	57.25	126.80	-69.55	Peak
2	0.024	29.66	25.84	55.50	120.04	-64.54	Peak
3	0.048	26.58	27.13	53.71	113.93	-60.22	Peak
4	0.072	24.18	27.57	51.75	110.43	-58.68	Peak
5	0.096	22.26	26.65	48.91	107.94	-59.03	Peak
6	0.145	19.32	24.16	43.48	104.35	-60.87	Peak


150kHz-30MHz-Adapter

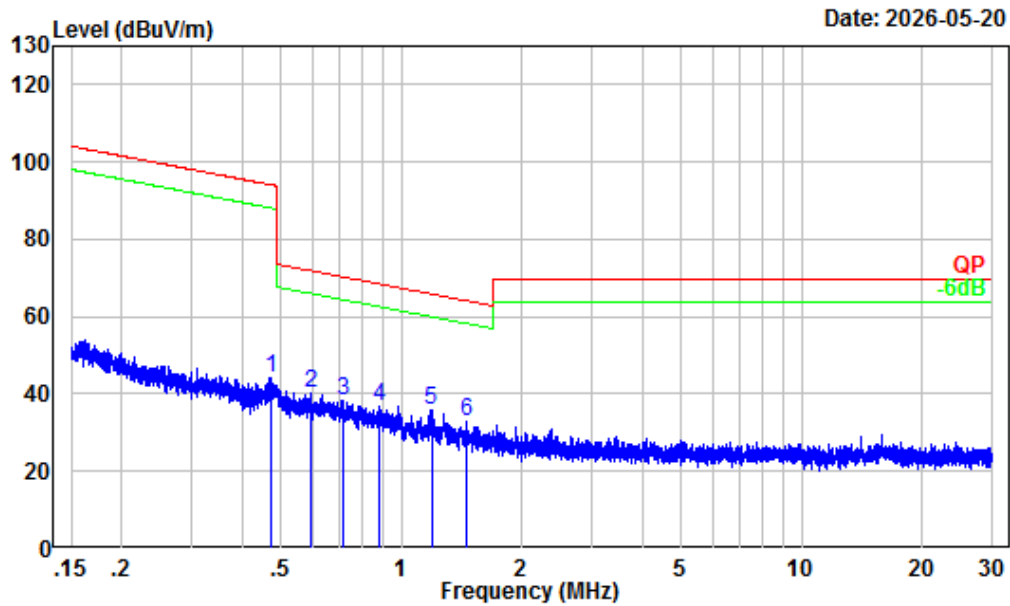

Site : Chamber A
Condition : 3m
Project Number : 2601S56424E-RF
Test Mode : BLE Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.472	6.93	37.38	44.31	94.12	-49.81	Peak
2	0.592	5.26	35.01	40.27	72.12	-31.85	Peak
3	0.717	3.72	34.49	38.21	70.42	-32.21	Peak
4	0.881	2.09	34.79	36.88	68.59	-31.71	Peak
5	1.190	0.67	35.22	35.89	65.93	-30.04	Peak
6	1.462	-0.09	32.77	32.68	64.10	-31.42	Peak


30MHz-1GHz_Horizontal-Adapter

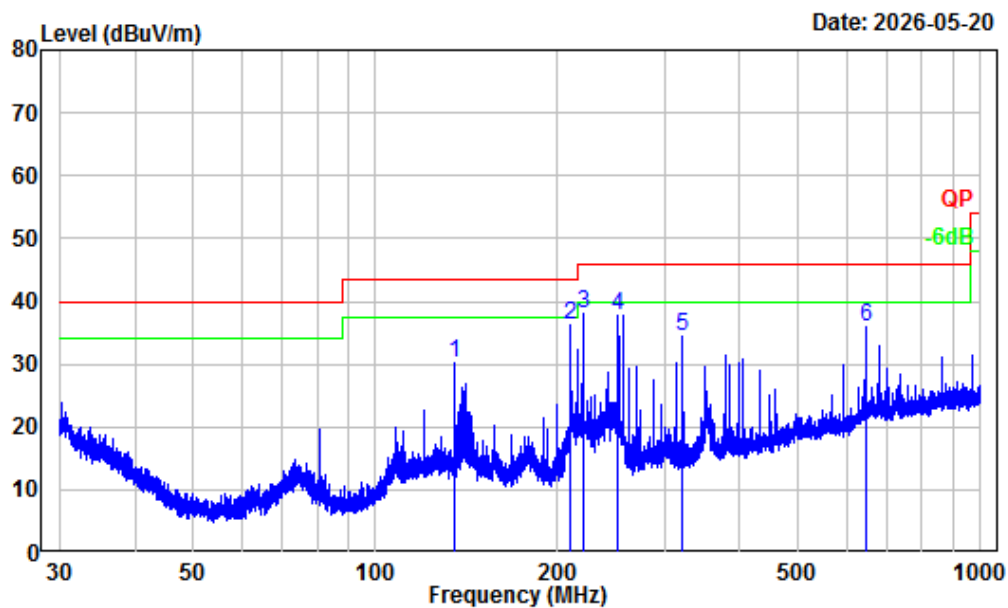

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601S56424E-RF
Test Mode : BLE Transmitting
Detector: Peak RBW/VBW: 120/500kHz
Tester : Anson Su

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	134.97	-11.86	42.03	30.17	43.50	-13.33	Peak
2	209.96	-14.35	50.51	36.16	43.50	-7.34	Peak
3	220.52	-14.54	52.60	38.06	46.00	-7.94	Peak
4	251.95	-13.52	51.34	37.82	46.00	-8.18	Peak
5	320.78	-11.18	45.44	34.26	46.00	-11.74	Peak
6	648.24	-3.69	39.75	36.06	46.00	-9.94	Peak


30MHz-1GHz_Vertical-Adapter

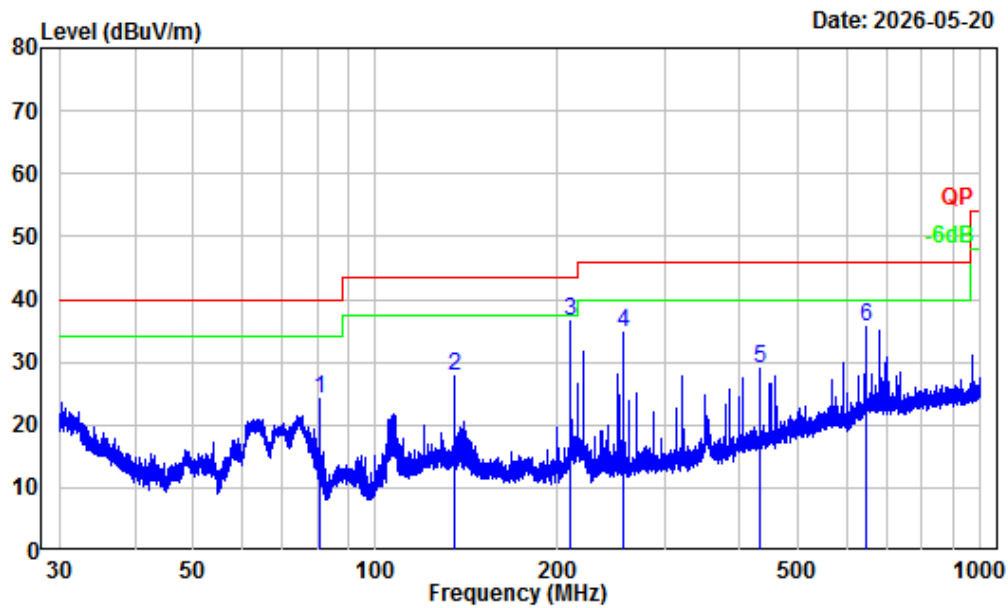

Site : Chamber A
Condition : 3m Vertical
Project Number : 2601S56424E-RF
Test Mode : BLE Transmitting
Detector: Peak RBW/VBW: 120/500kHz
Tester : Anson Su

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	81.00	-18.14	42.42	24.28	40.00	-15.72	Peak
2	134.97	-11.86	39.50	27.64	43.50	-15.86	Peak
3	210.05	-14.36	50.80	36.44	43.50	-7.06	Peak
4	256.63	-13.42	48.00	34.58	46.00	-11.42	Peak
5	431.98	-8.31	37.29	28.98	46.00	-17.02	Peak
6	648.24	-3.69	39.33	35.64	46.00	-10.36	Peak


9kHz-150kHz-POE

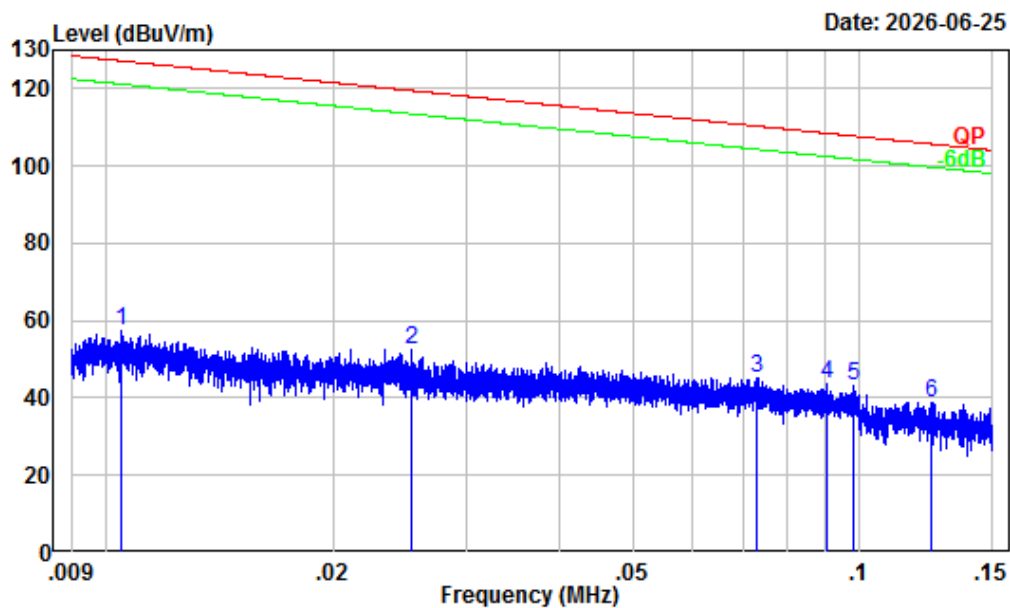

Site : Chamber A
Condition : 3m
Project Number : 2601S56424E-RF
Test Mode : BLE Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Alex Yan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.010	32.21	25.07	57.28	127.22	-69.94	Peak
2	0.025	29.37	23.29	52.66	119.50	-66.84	Peak
3	0.073	24.08	21.14	45.22	110.31	-65.09	Peak
4	0.091	22.65	21.16	43.81	108.45	-64.64	Peak
5	0.098	22.15	21.10	43.25	107.79	-64.54	Peak
6	0.124	20.56	18.40	38.96	105.70	-66.74	Peak


150kHz-30MHz-POE

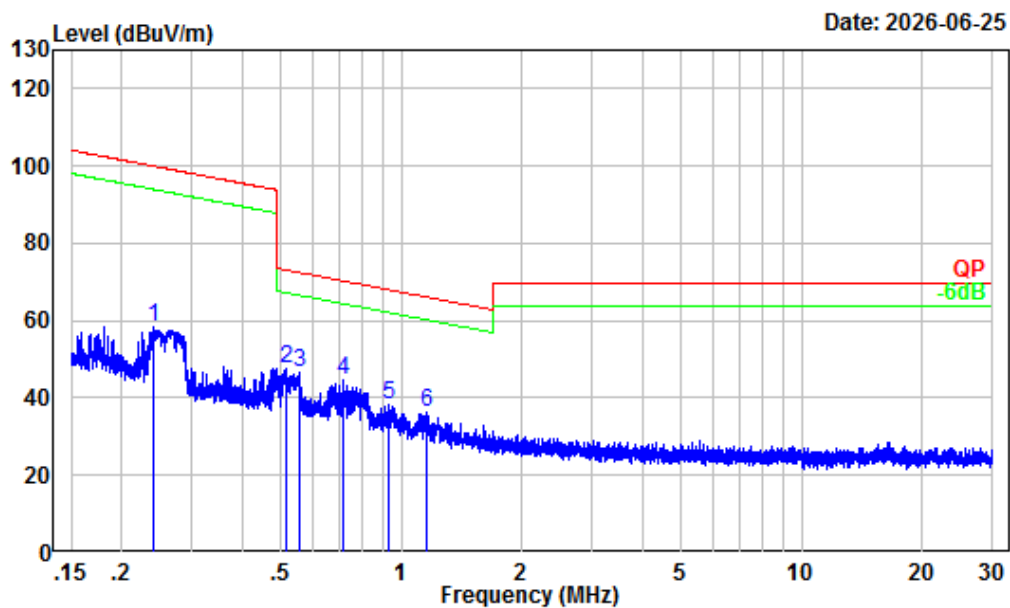

Site : Chamber A
Condition : 3m
Project Number : 2601S56424E-RF
Test Mode : BLE Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Alex Yan

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.241	13.69	44.49	58.18	99.97	-41.79	Peak
2	0.514	6.23	41.17	47.40	73.38	-25.98	Peak
3	0.556	5.71	41.07	46.78	72.69	-25.91	Peak
4	0.719	3.70	41.08	44.78	70.40	-25.62	Peak
5	0.930	1.72	36.35	38.07	68.12	-30.05	Peak
6	1.163	0.74	35.78	36.52	66.14	-29.62	Peak


30MHz-1GHz_Horizontal-POE

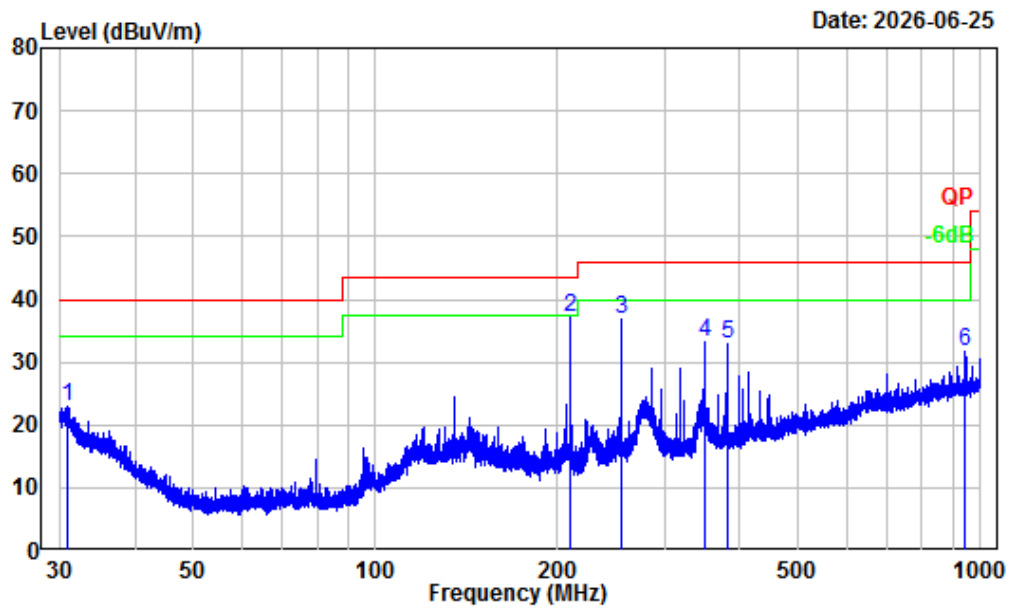

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601S56424E-RF
Test Mode : BLE Transmitting
Detector: Peak RBW/VBW: 120/500kHz
Tester : Alex Yan

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	31.016	-6.26	29.23	22.97	40.00	-17.03	Peak
2	209.956	-13.91	51.15	37.24	43.50	-6.26	Peak
3	254.952	-13.03	50.00	36.97	46.00	-9.03	Peak
4	351.092	-10.04	43.32	33.28	46.00	-12.72	Peak
5	382.588	-9.11	41.98	32.87	46.00	-13.13	Peak
6	945.026	-0.43	32.25	31.82	46.00	-14.18	Peak

30MHz-1GHz_Vertical-POE

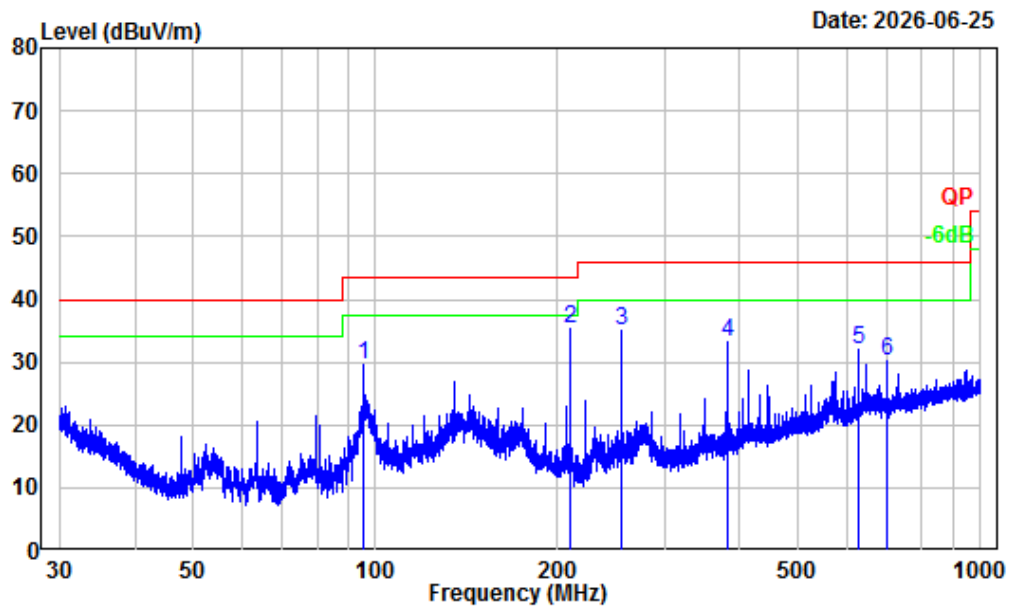

Site : Chamber A
Condition : 3m Vertical
Project Number : 2601S56424E-RF
Test Mode : BLE Transmitting
Detector: Peak RBW/VBW: 120/500kHz
Tester : Alex Yan

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	Limit	
			dBuV	dBuV/m	dBuV/m	dB	
1	95.469	-17.06	46.63	29.57	43.50	-13.93	Peak
2	209.956	-13.91	49.28	35.37	43.50	-8.13	Peak
3	254.840	-13.03	48.00	34.97	46.00	-11.03	Peak
4	382.085	-9.12	42.34	33.22	46.00	-12.78	Peak
5	630.029	-3.84	35.70	31.86	46.00	-14.14	Peak
6	702.069	-3.51	33.66	30.15	46.00	-15.85	Peak

Above 1GHz:

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
BLE 1M							
Low Channel							
4804.00	53.05	PK	H	-7.83	45.22	74	-28.78
4804.00	51.81	PK	V	-7.83	43.98	74	-30.02
Middle Channel							
4880.00	52.09	PK	H	-7.67	44.42	74	-29.58
4880.00	52.76	PK	V	-7.67	45.09	74	-28.91
High Channel							
4960.00	52.17	PK	H	-7.57	44.60	74	-29.40
4960.00	51.90	PK	V	-7.57	44.33	74	-29.67
BLE 2M							
Low Channel							
4804.00	51.93	PK	H	-7.83	44.10	74	-29.90
4804.00	51.53	PK	V	-7.83	43.70	74	-30.30
Middle Channel							
4880.00	52.45	PK	H	-7.67	44.78	74	-29.22
4880.00	52.23	PK	V	-7.67	44.56	74	-29.44
High Channel							
4960.00	51.68	PK	H	-7.57	44.11	74	-29.89
4960.00	51.58	PK	V	-7.57	44.01	74	-29.99
LE S2							
Low Channel							
4804.00	51.86	PK	H	-7.83	44.03	74	-29.97
4804.00	51.38	PK	V	-7.83	43.55	74	-30.45
Middle Channel							
4880.00	52.52	PK	H	-7.67	44.85	74	-29.15
4880.00	51.87	PK	V	-7.67	44.20	74	-29.80
High Channel							
4960.00	51.78	PK	H	-7.57	44.21	74	-29.79
4960.00	51.45	PK	V	-7.57	43.88	74	-30.12

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
LE S8							
Low Channel							
4804.00	51.58	PK	H	-7.83	43.75	74	-30.25
4804.00	51.25	PK	V	-7.83	43.42	74	-30.58
Middle Channel							
4880.00	52.03	PK	H	-7.67	44.36	74	-29.64
4880.00	51.69	PK	V	-7.67	44.02	74	-29.98
High Channel							
4960.00	51.46	PK	H	-7.57	43.89	74	-30.11
4960.00	51.07	PK	V	-7.57	43.50	74	-30.50

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak values were recorded.

Test plots**1-25GHz (Listed with the worst case test plot)**


1-4GHz_Horizontal_BLE 1M_2402MHz

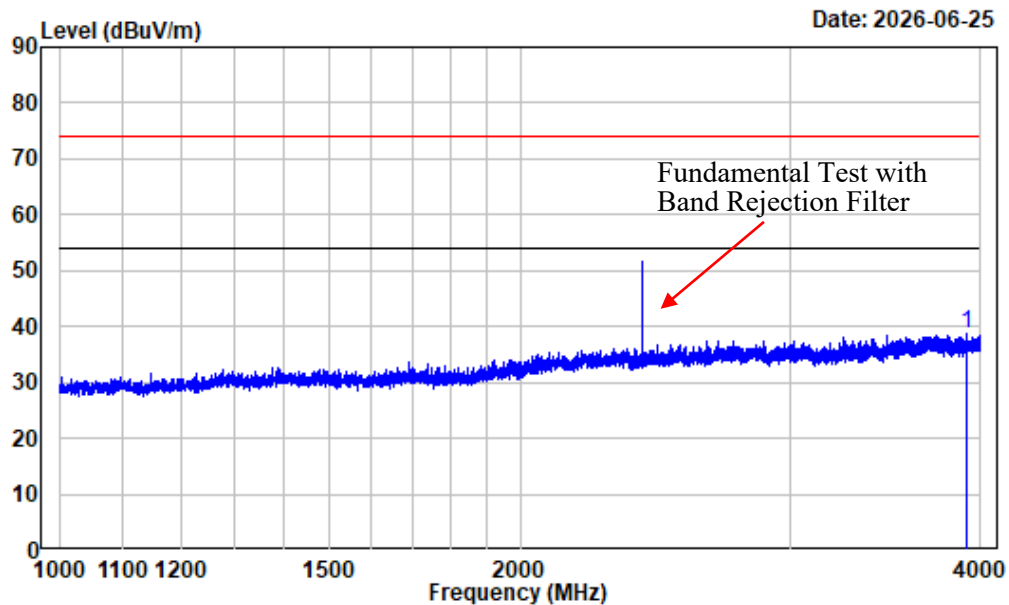

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE1M-2402

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3915.625	-8.68	47.27	38.59	74.00	-35.41 Peak


1-4GHz_Vertical_BLE 1M_2402MHz

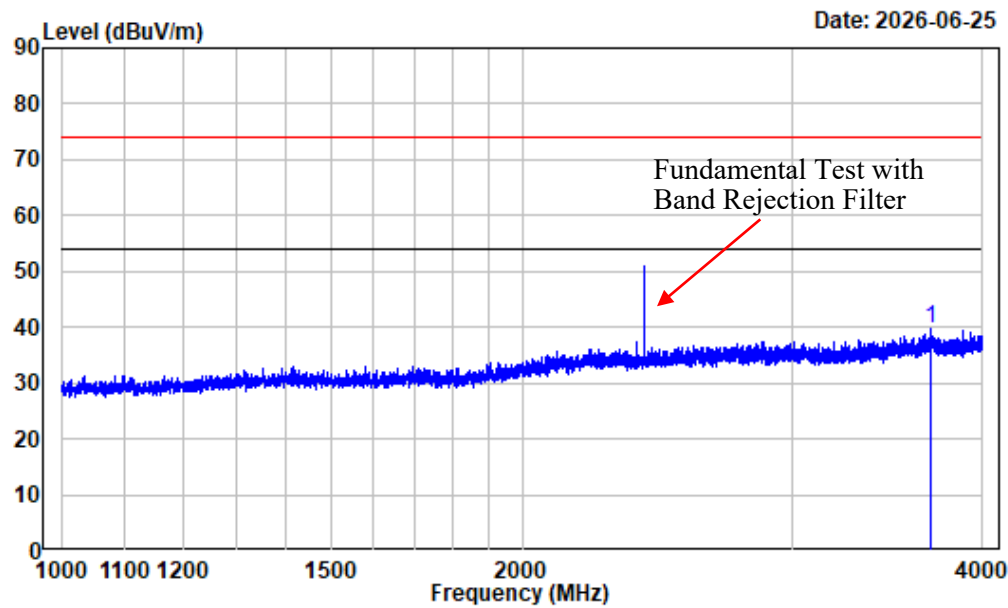

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE1M-2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3702.625	-8.51	48.15	39.64	74.00	-34.36	Peak


4-18GHz_Horizontal_Peak_BLE 1M_2402MHz

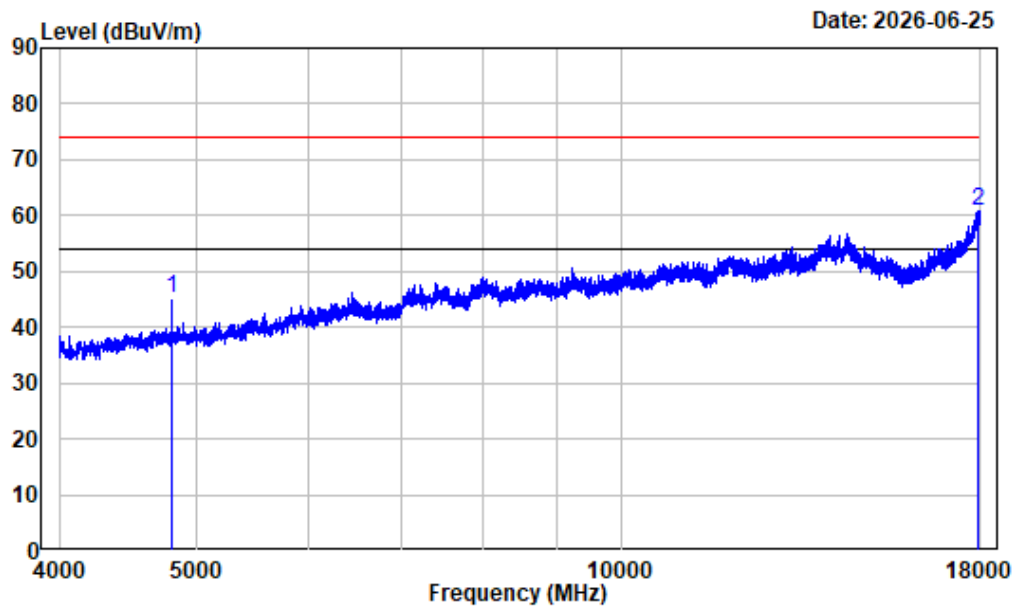

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE1M-2402

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 4804.000	-7.83	53.05	45.22	74.00	-28.78 Peak
2 17930.000	12.91	47.84	60.75	74.00	-13.25 Peak


4-18GHz_Horizontal_Average_BLE 1M_2402MHz

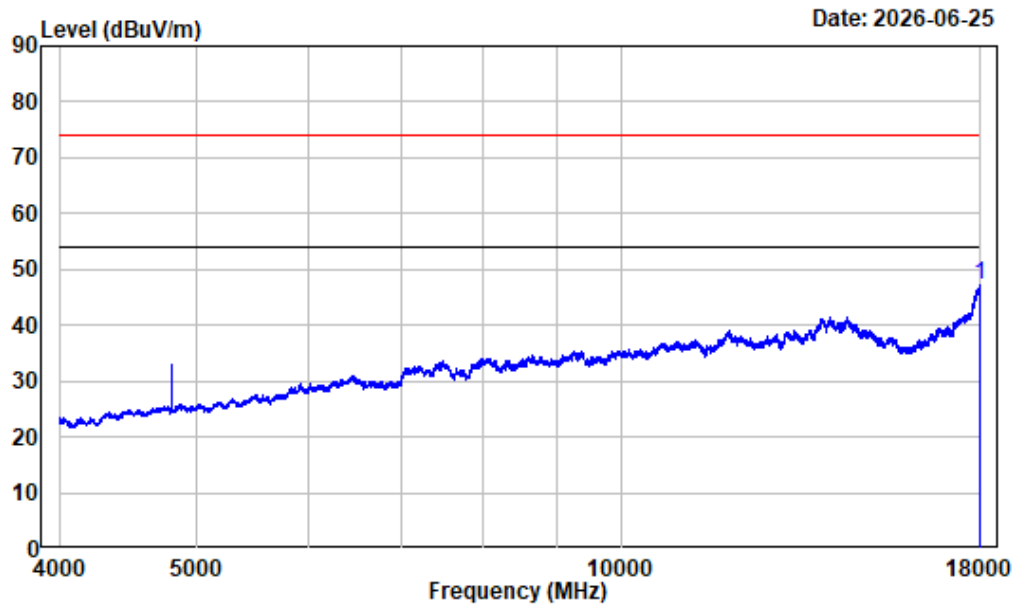

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : BLE1M-2402

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17994.750	13.23	33.86	47.09	54.00	-6.91	Average


4-18GHz_Vertical_Peak_BLE 1M_2402MHz

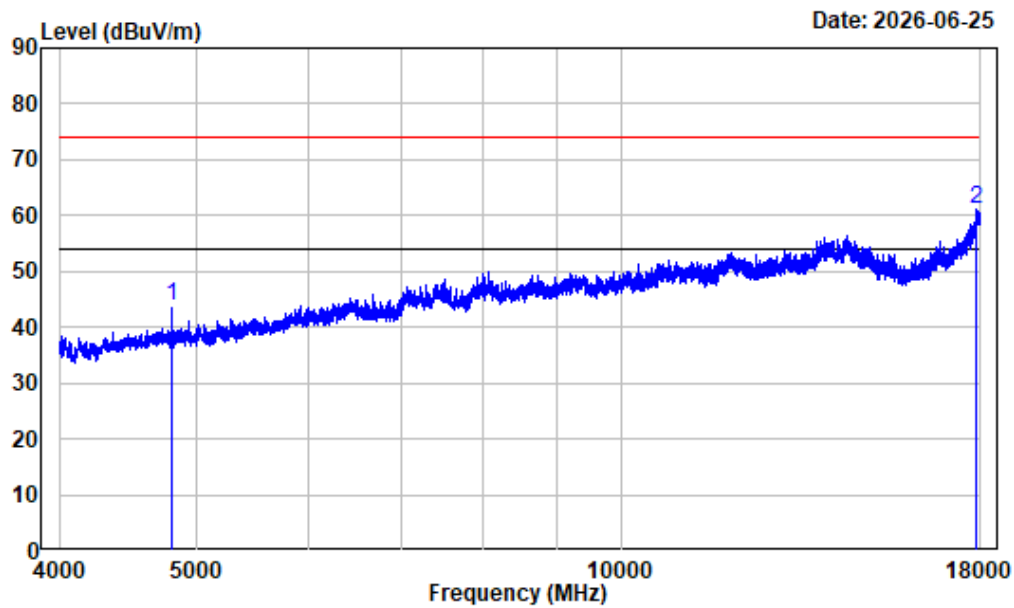

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE1M-2402

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 4804.000	-7.83	51.81	43.98	74.00	-30.02 Peak
2 17870.500	12.20	49.00	61.20	74.00	-12.80 Peak


4-18GHz_Vertical_Average_BLE 1M_2402MHz

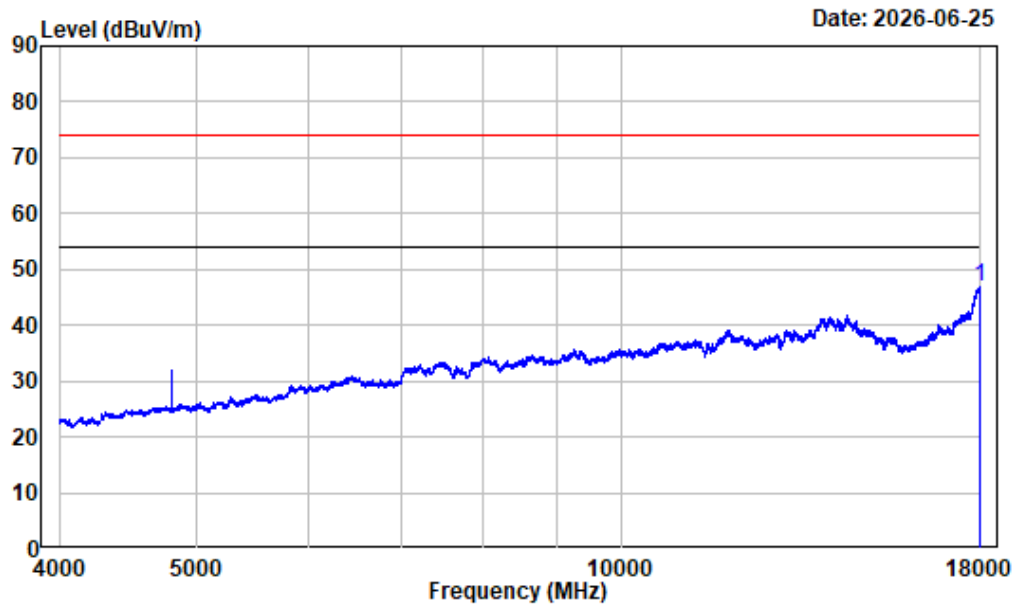

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : BLE1M-2402

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17975.500	13.14	33.64	46.78	54.00	-7.22	Average


18-25GHz_Horizontal_BLE 1M_2402MHz

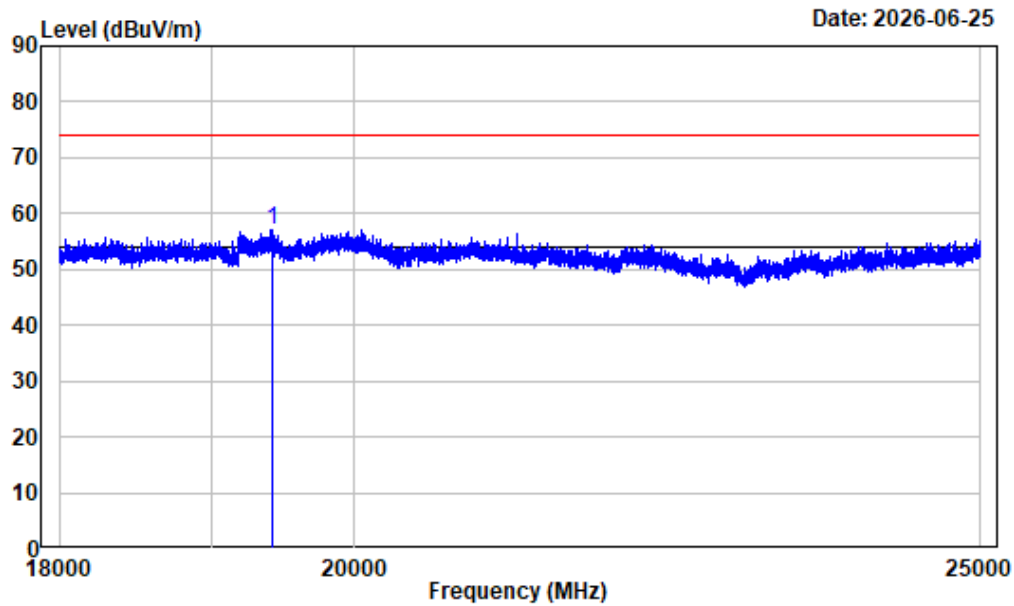

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE1M-2402

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 19425.380	17.32	39.83	57.15	74.00	-16.85 Peak


18-25GHz_Horizontal_Average_BLE 1M_2402MHz

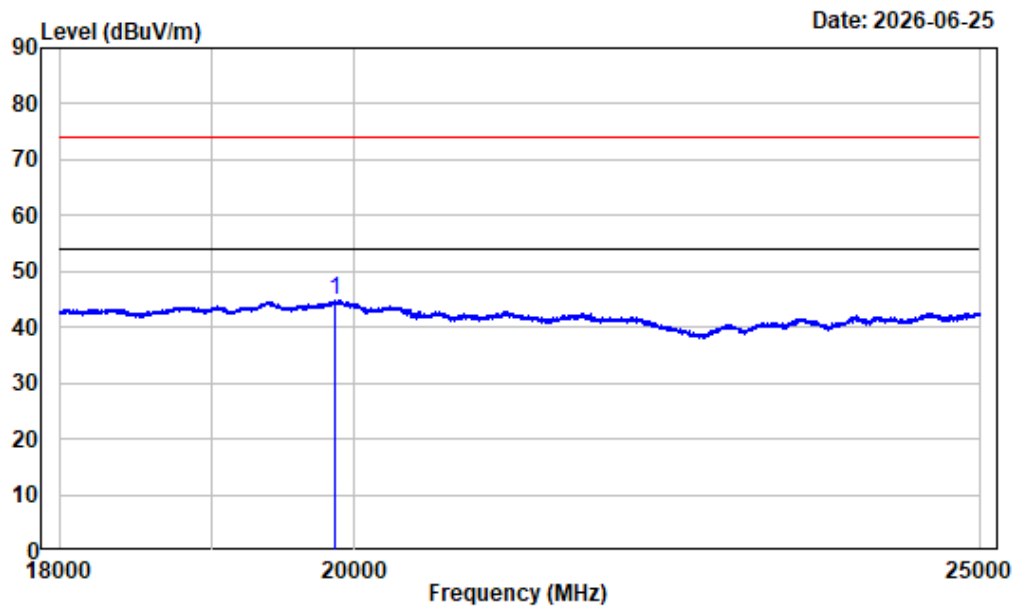

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : BLE1M-2402

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 19856.750	17.77	27.02	44.79	54.00	-9.21 Average


18-25GHz_Vertical_Peak_BLE 1M_2402MHz

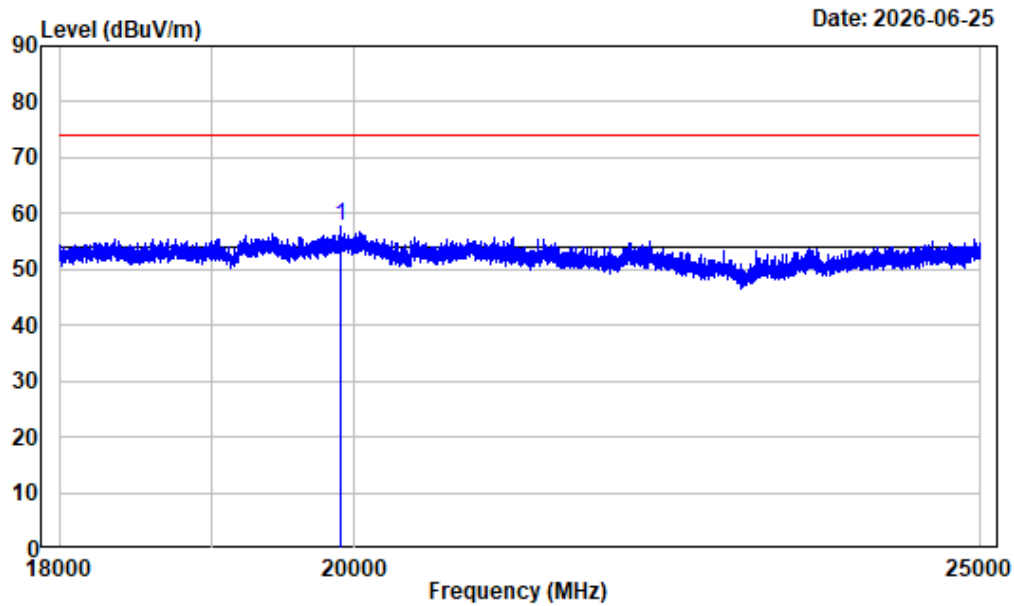

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE1M-2402

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 19904.000	17.79	39.99	57.78	74.00	-16.22 Peak


18-25GHz_Vertical_Average_BLE 1M_2402MHz

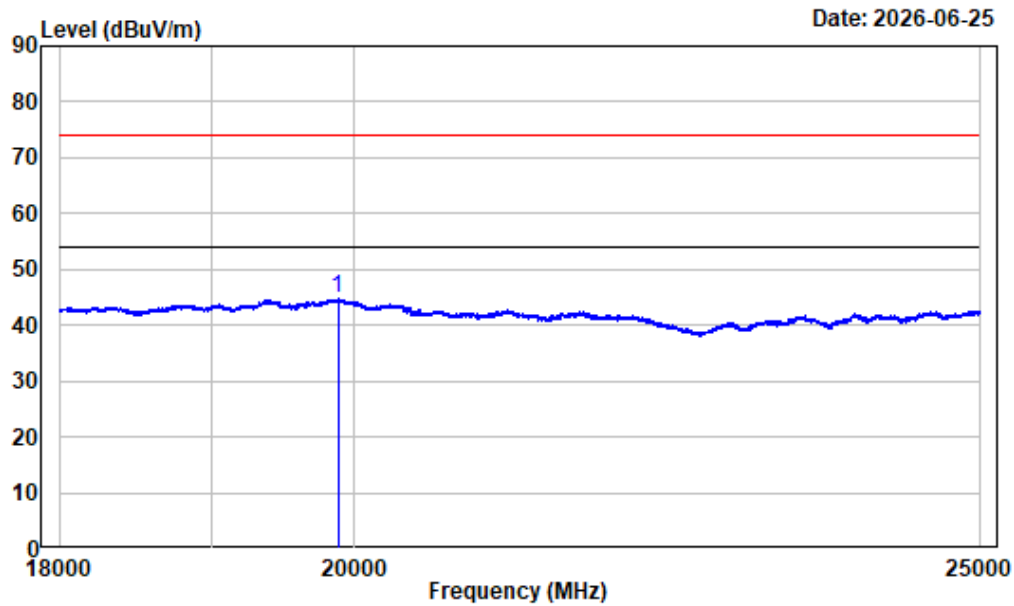

Condition : Vertical
 Project No. : 2601S56424E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
 Note : BLE1M-2402

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19879.500	17.78	26.91	44.69	54.00	-9.31	Average


1-4GHz_Horizontal_BLE 2M_2440MHz

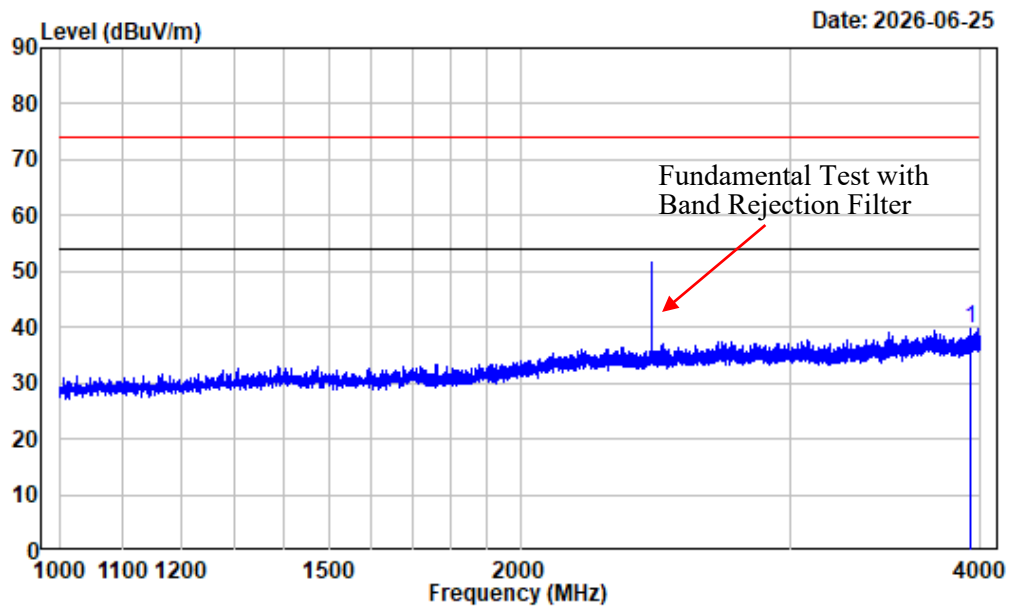

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE2M-2440

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3941.125	-8.39	48.18	39.79	74.00	-34.21	Peak


1-4GHz_Vertical_BLE 2M_2440MHz

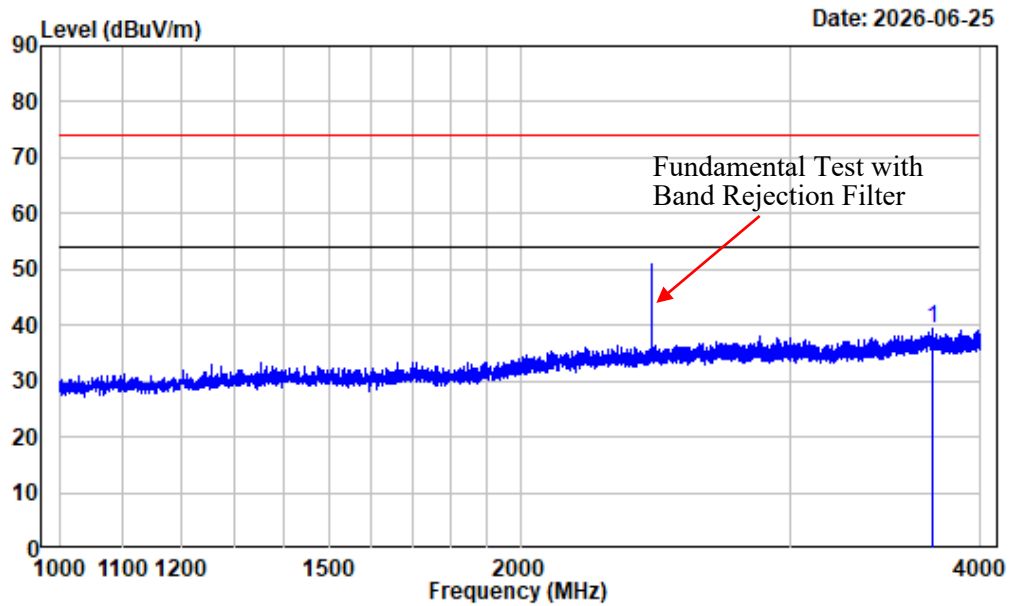

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE2M-2440

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3722.125	-8.61	47.92	39.31	74.00	-34.69 Peak


4-18GHz_Horizontal_Peak_BLE 2M_2440MHz

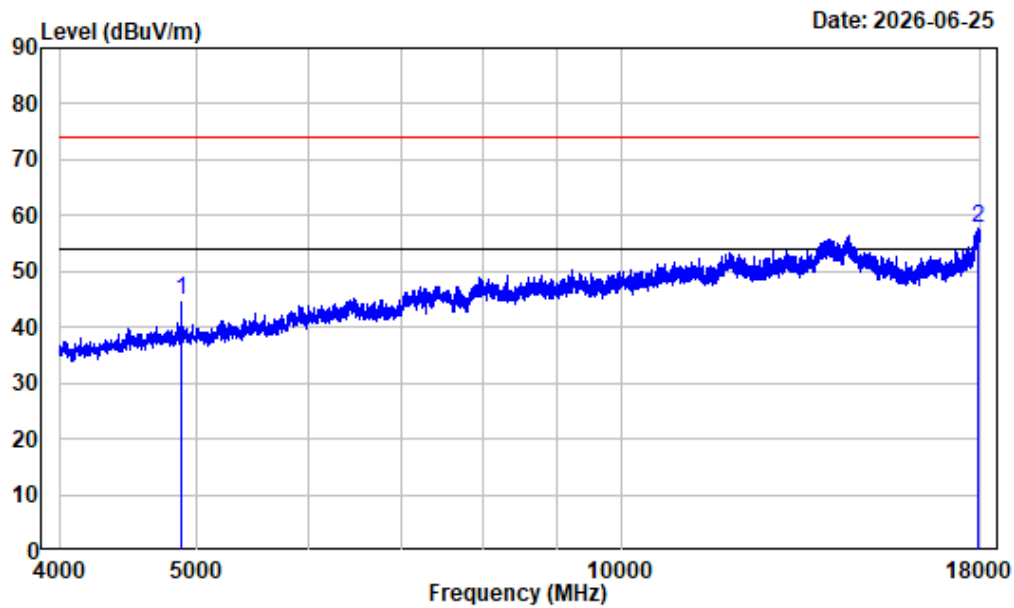

Condition : Horizontal
 Project No. : 2601S56424E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : BLE2M-2440

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4880.000	-7.67	52.45	44.78	74.00	-29.22	Peak
2 17910.750	9.14	48.63	57.77	74.00	-16.23	Peak


4-18GHz_Horizontal_Average_BLE 2M_2440MHz

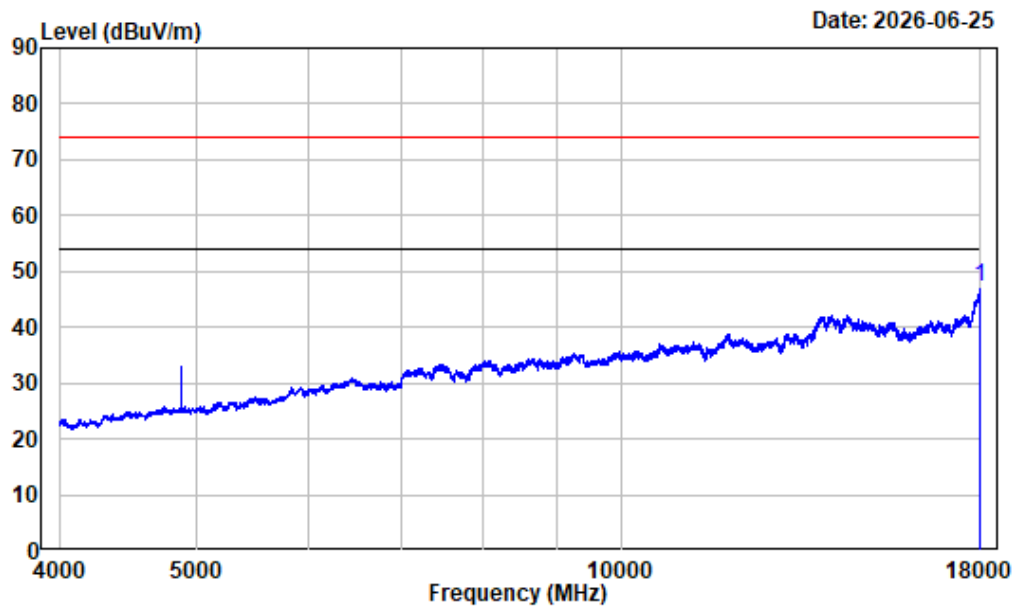

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : BLE2M-2440

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17993.000	9.53	37.55	47.08	54.00	-6.92	Average


4-18GHz_Vertical_Peak_BLE 2M_2440MHz

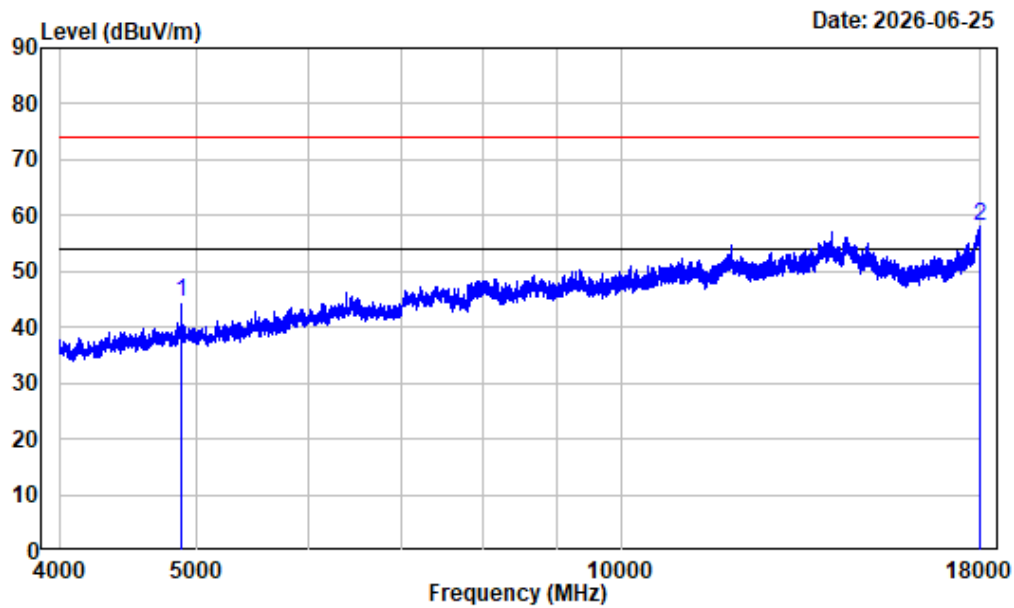

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE2M-2440

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 4880.000	-7.67	52.23	44.56	74.00	-29.44 Peak
2 17993.000	9.53	48.45	57.98	74.00	-16.02 Peak


4-18GHz_Vertical_Average_BLE 2M_2440MHz

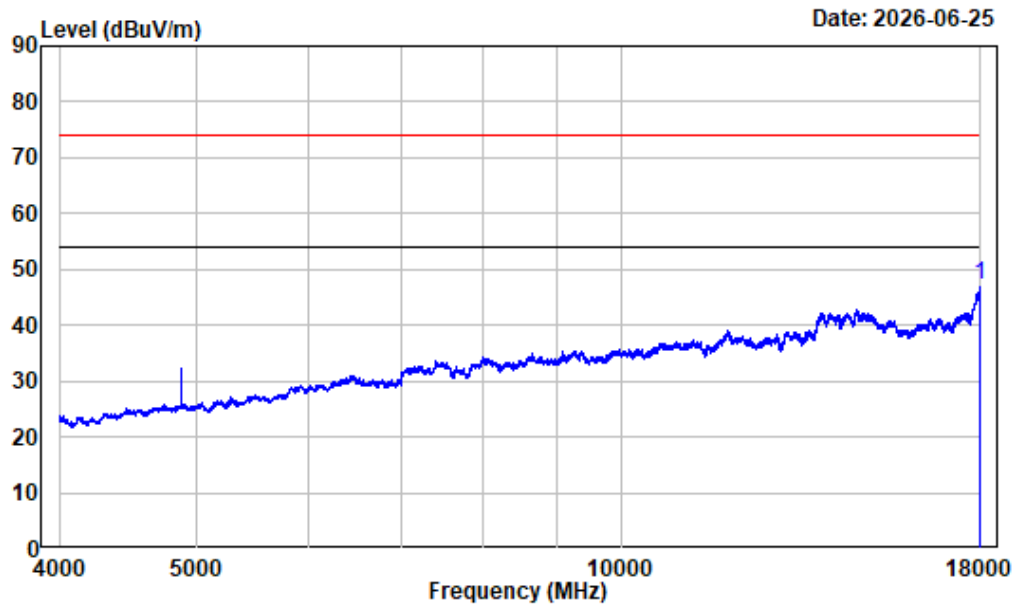

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : BLE2M-2440

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17982.500	9.48	37.61	47.09	54.00	-6.91	Average


18-25GHz_Horizontal_Peak_BLE 2M_2440MHz

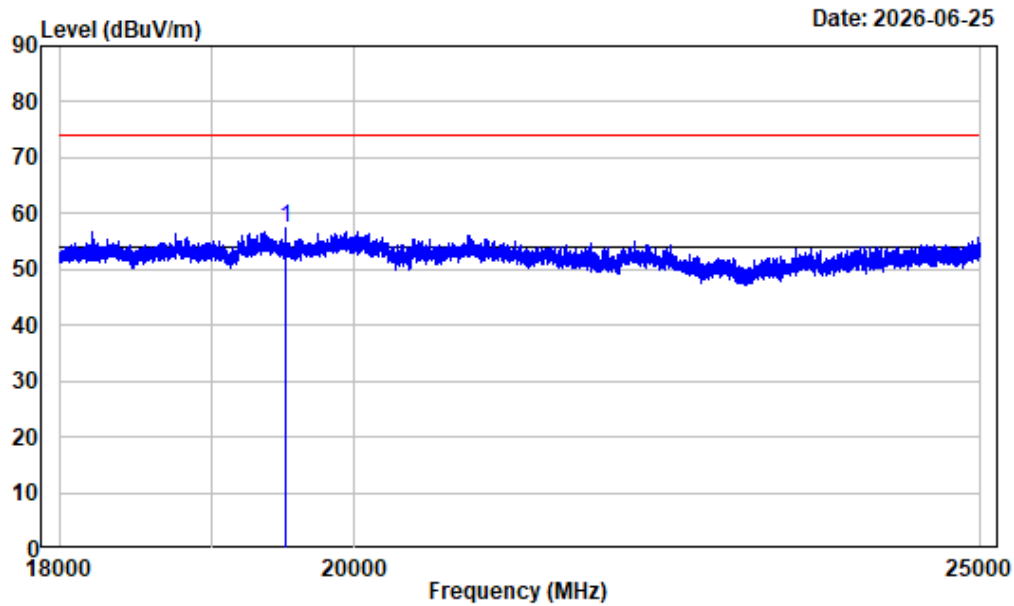

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE2M-2440

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 19515.500	17.38	39.97	57.35	74.00	-16.65 Peak


18-25GHz_Horizontal_Average_BLE 2M_2440MHz

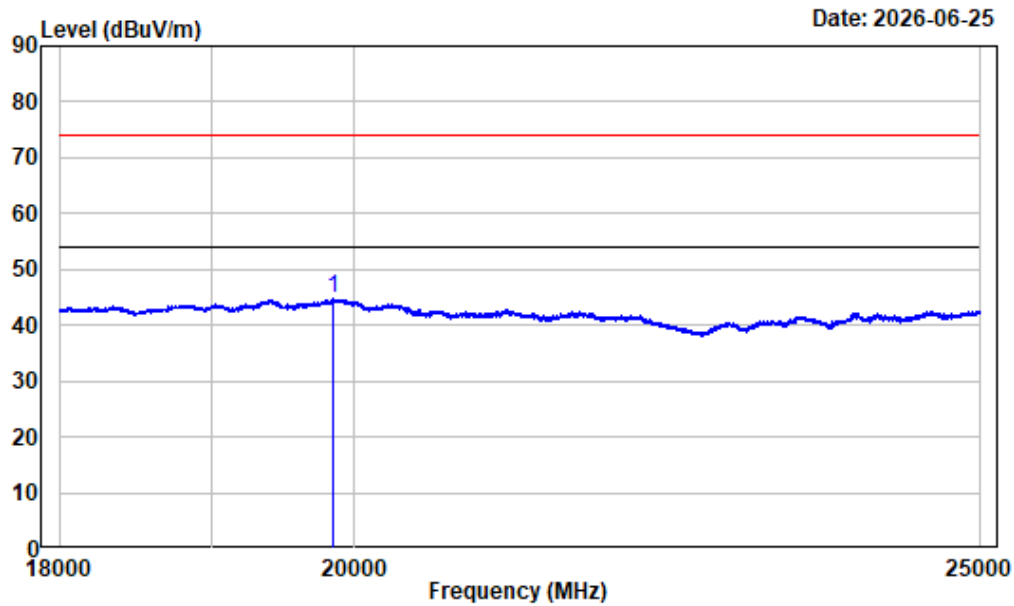

Condition : Horizontal
 Project No. : 2601S56424E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
 Note : BLE2M-2440

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19841.880	17.76	27.00	44.76	54.00	-9.24	Average


18-25GHz_Vertical_Peak_BLE 2M_2440MHz

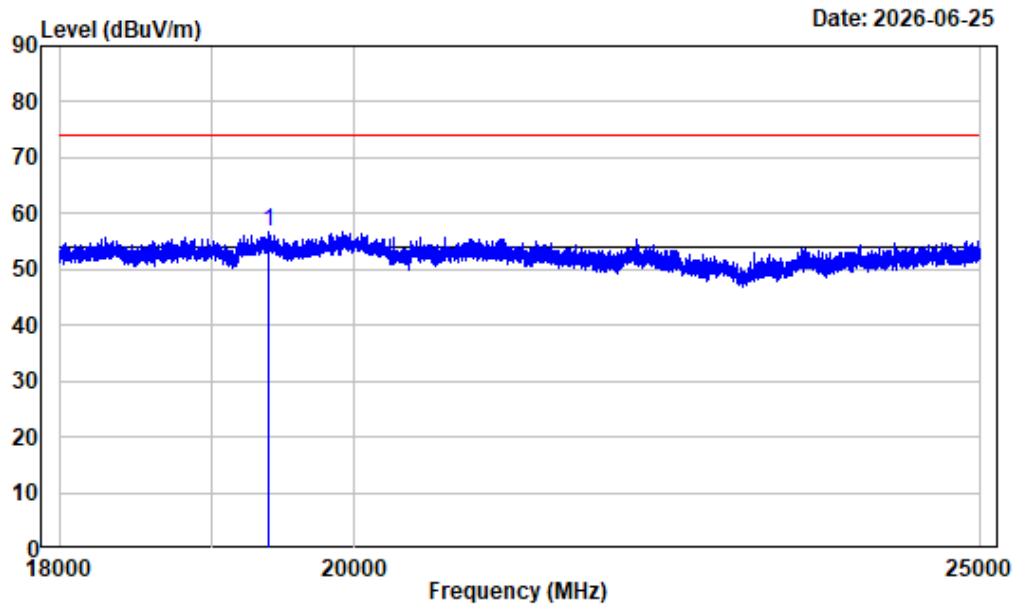

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE2M-2440

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 19395.630	17.31	39.51	56.82	74.00	-17.18 Peak


18-25GHz_Vertical_Average_BLE 2M_2440MHz

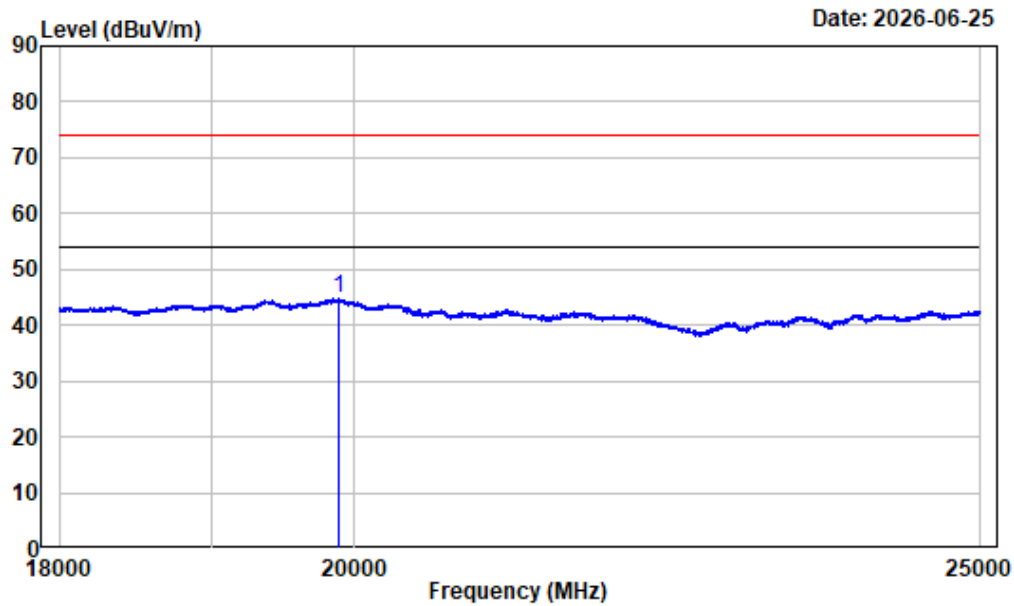

Condition : Vertical
 Project No. : 2601S56424E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
 Note : BLE2M-2440

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19883.000	17.78	26.91	44.69	54.00	-9.31	Average


1-4GHz_Horizontal_LE S2_2440MHz

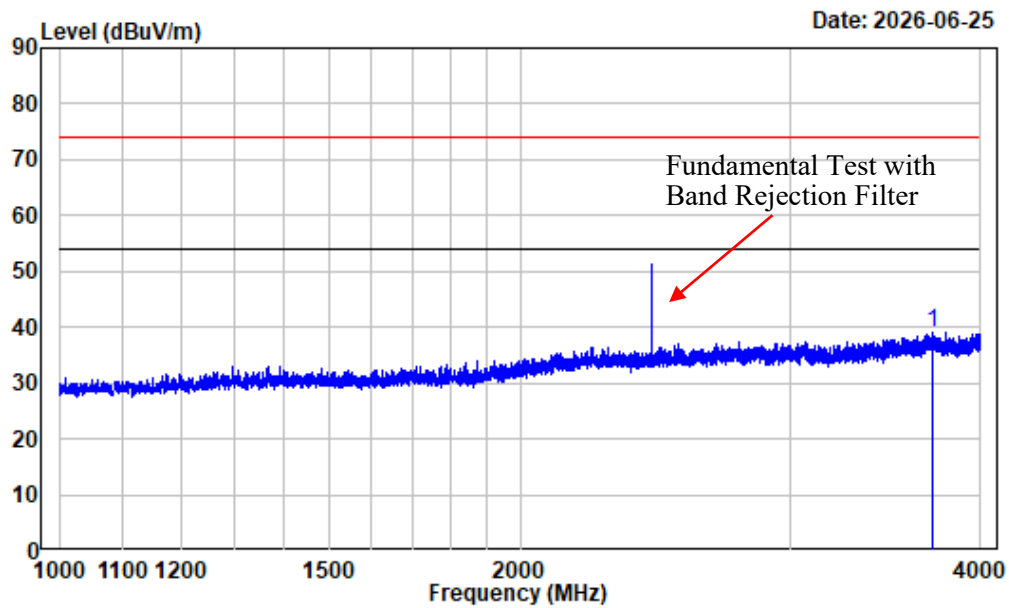

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : LE S2-2440

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 3720.250	-8.59	47.70	39.11	74.00	-34.89 Peak


1-4GHz_Vertical_LE S2_2440MHz

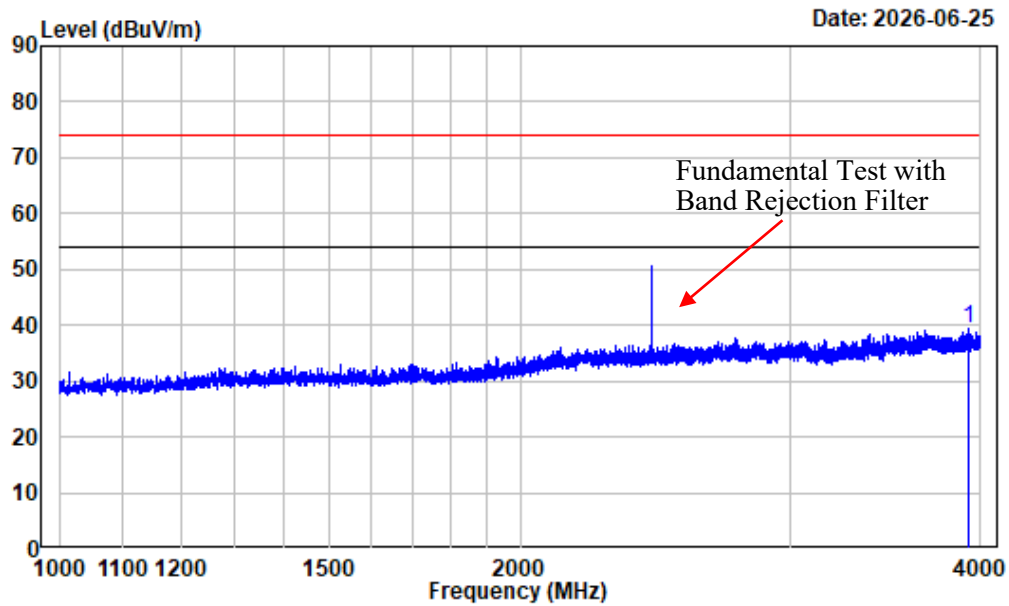

Condition : Vertical
 Project No. : 2601S56424E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : LE S2-2440

Freq Factor		Read	Limit	Over	Remark
Level	Level	Line	Limit	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 3934.375	-8.46	47.85	39.39	74.00	-34.61 Peak


4-18GHz_Horizontal_Peak_LE S2_2440MHz

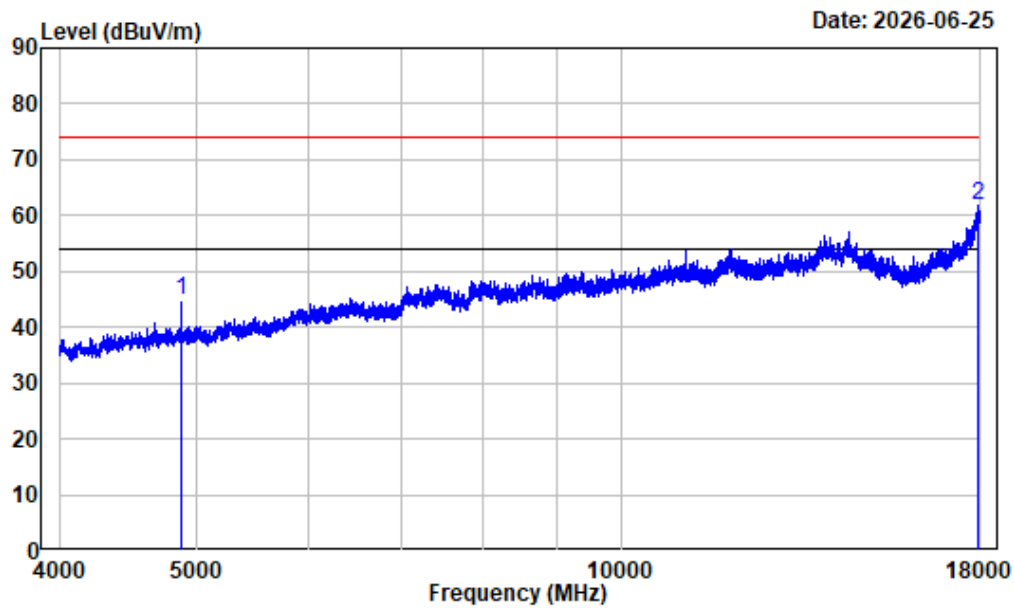

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : LE S2-2440

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4880.000	-7.67	52.52	44.85	74.00	-29.15	Peak
2 17905.500	12.79	48.86	61.65	74.00	-12.35	Peak


4-18GHz_Horizontal_Average_LE S2_2440MHz

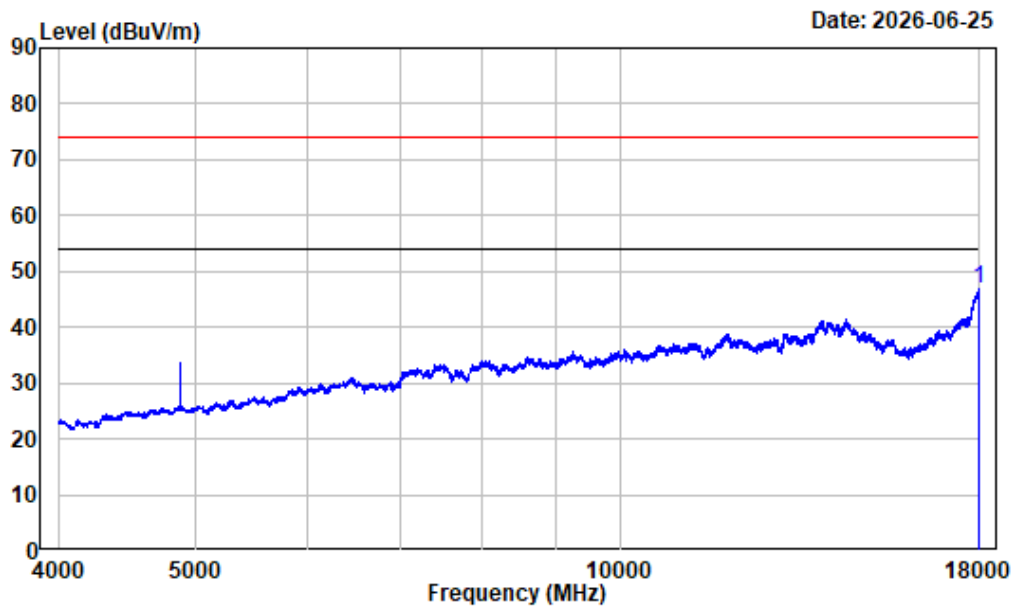

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : LE S2-2440

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17998.250	13.25	33.45	46.70	54.00	-7.30	Average


4-18GHz_Vertical_Peak_LE S2_2440MHz

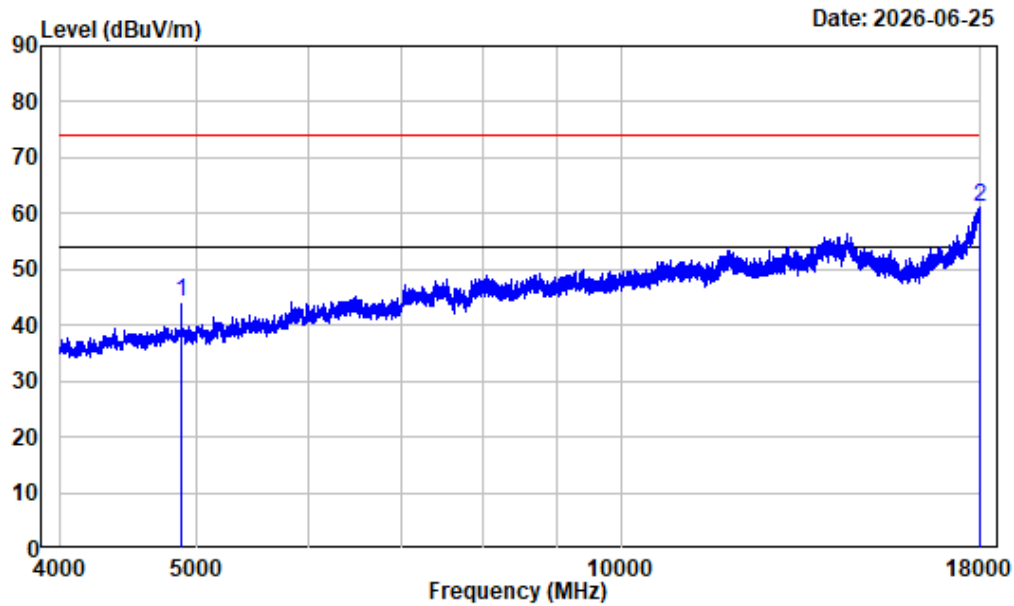

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : LE S2-2440

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1 4880.000	-7.67	51.87	44.20	74.00	-29.80	Peak
2 17993.000	13.23	47.75	60.98	74.00	-13.02	Peak


4-18GHz_Vertical_Average_LE S2_2440MHz

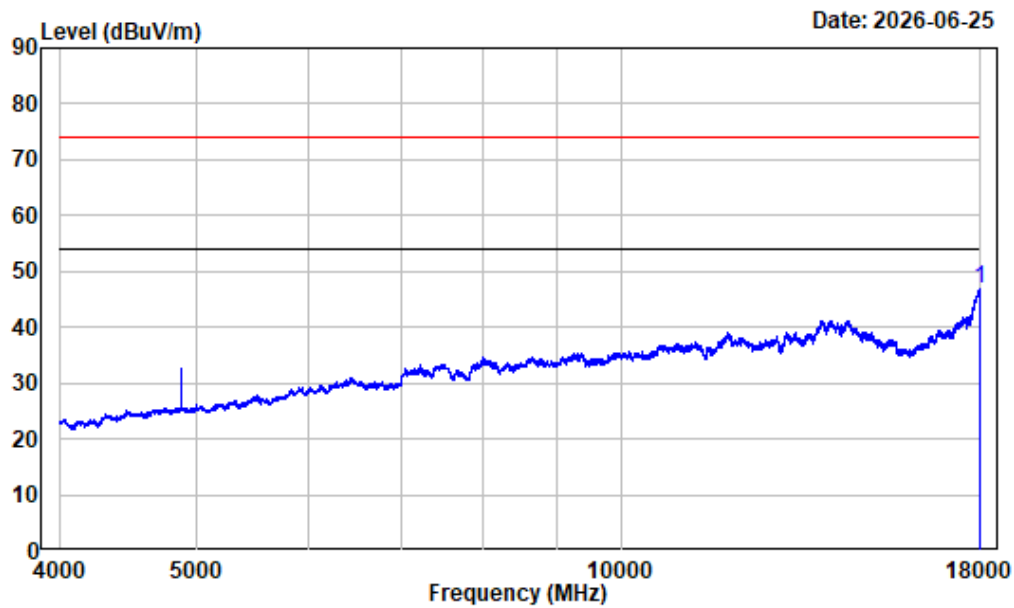

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : LE S2-2440

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 17975.500	13.14	33.85	46.99	54.00	-7.01 Average


18-25GHz_Horizontal_Peak_LE S2_2440MHz

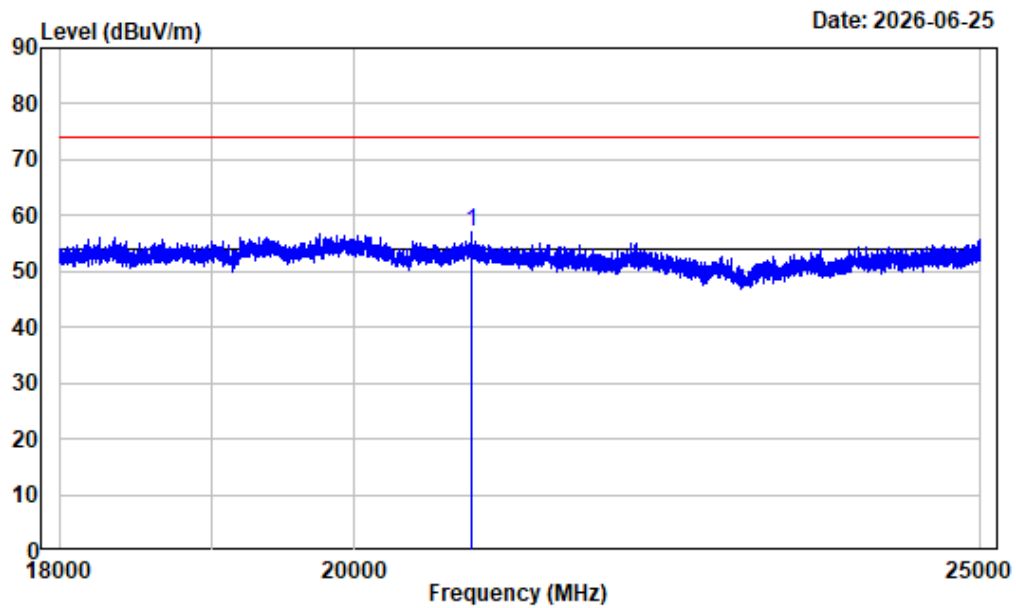

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : LE S2-2440

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	20855.130	17.95	39.08	57.03	74.00	-16.97	Peak


18-25GHz_Horizontal_Average_LE S2_2440MHz

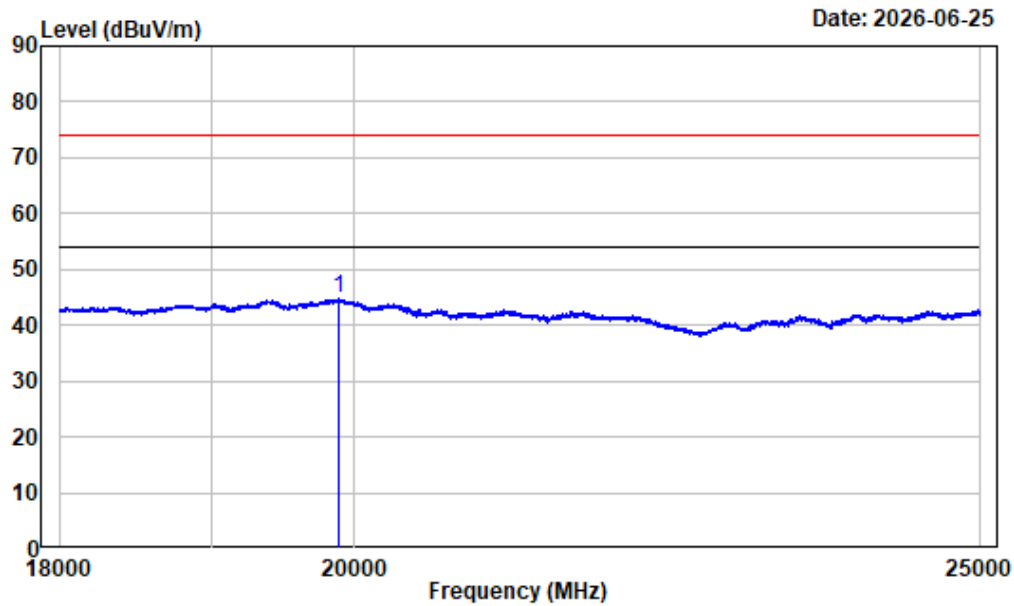

Condition : Horizontal
 Project No. : 2601S56424E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
 Note : LE S2-2440

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19891.750	17.79	26.92	44.71	54.00	-9.29	Average


18-25GHz_Vertical_Peak_LE S2_2440MHz

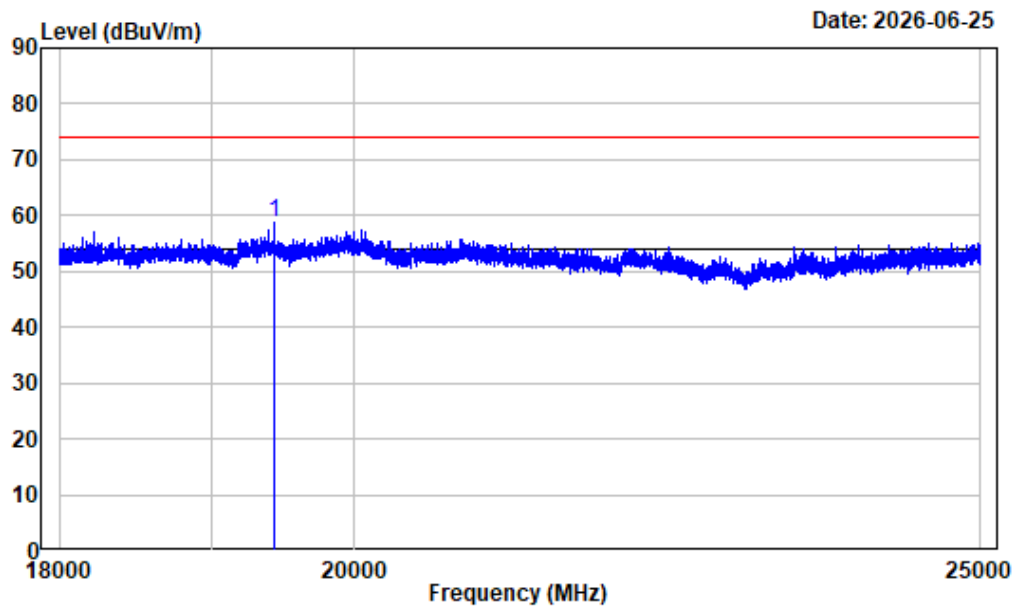

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : LE S2-2440

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 19430.630	17.32	41.35	58.67	74.00	-15.33 Peak


18-25GHz_Vertical_Average_LE S2_2440MHz

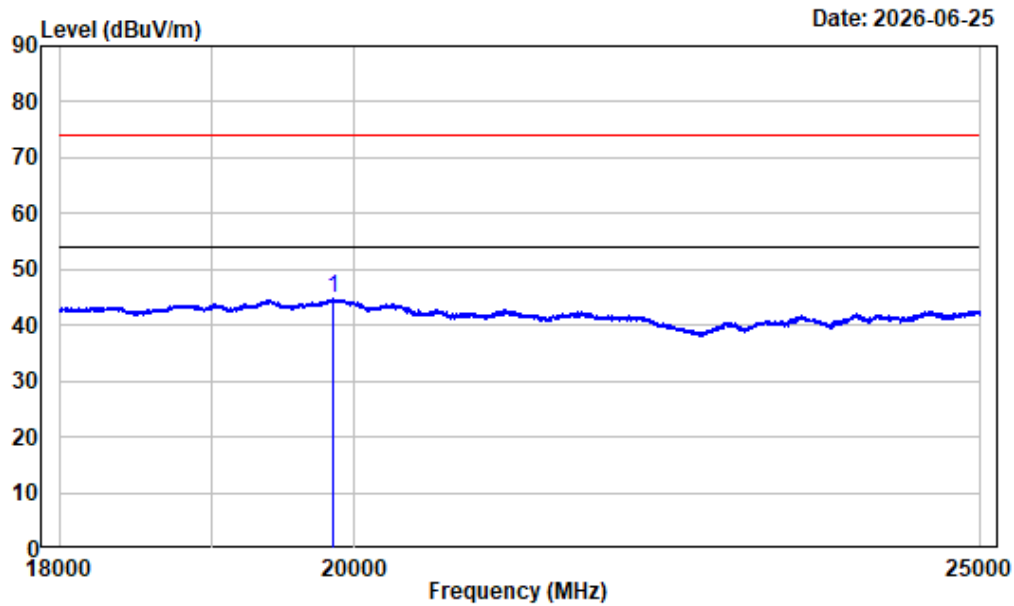

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : LE S2-2440

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 19847.130	17.77	26.96	44.73	54.00	-9.27 Average


1-4GHz_Horizontal_LE S8_2440MHz

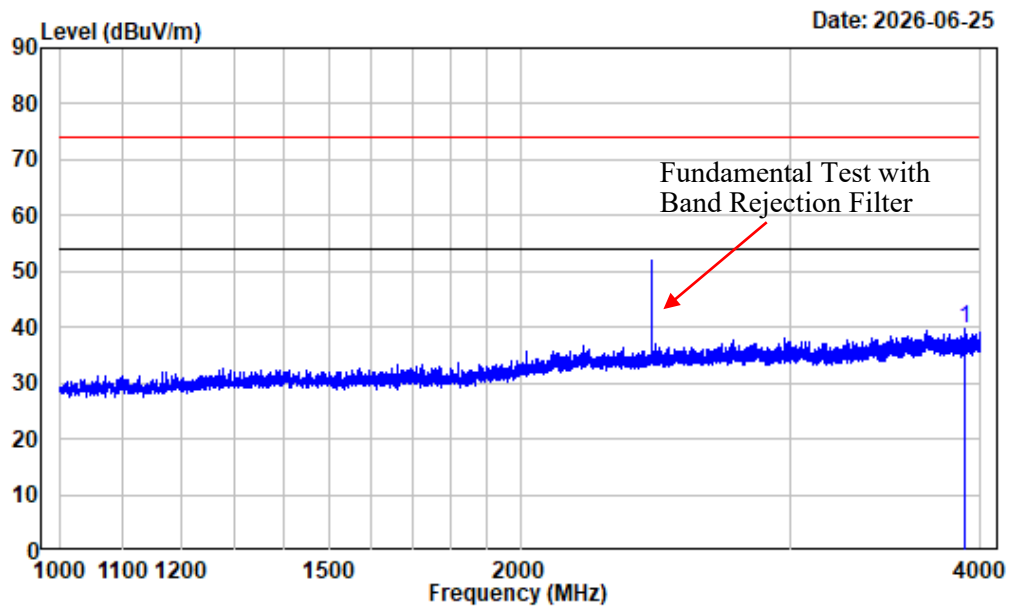

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : LE S8-2440

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3901.750	-8.82	48.65	39.83	74.00	-34.17	Peak


1-4GHz_Vertical_LE S8_2440MHz

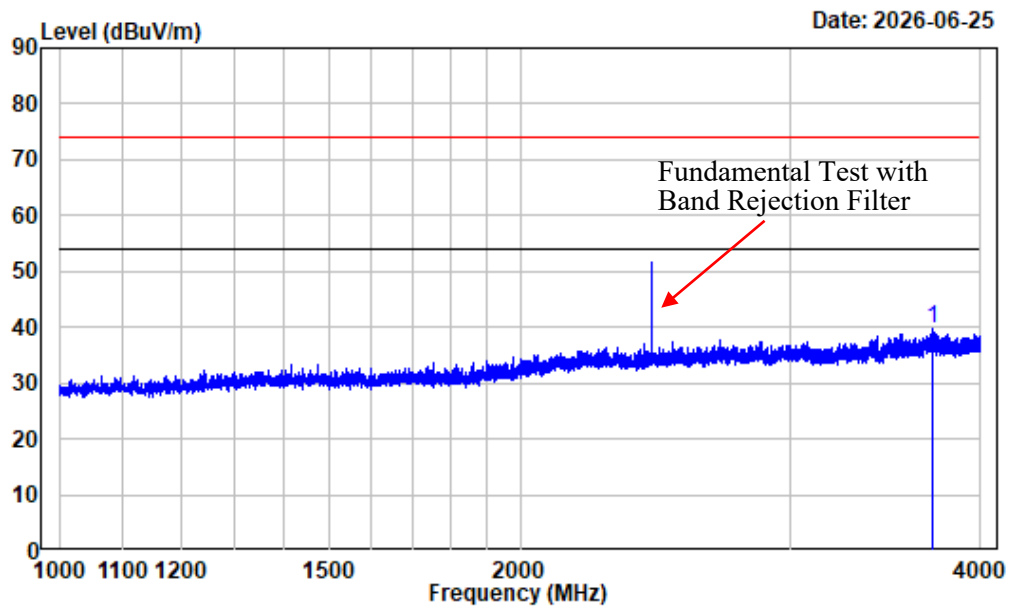

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : LE S8-2440

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3725.500	-8.63	48.25	39.62	74.00	-34.38 Peak


4-18GHz_Horizontal_Peak_LE S8_2440MHz

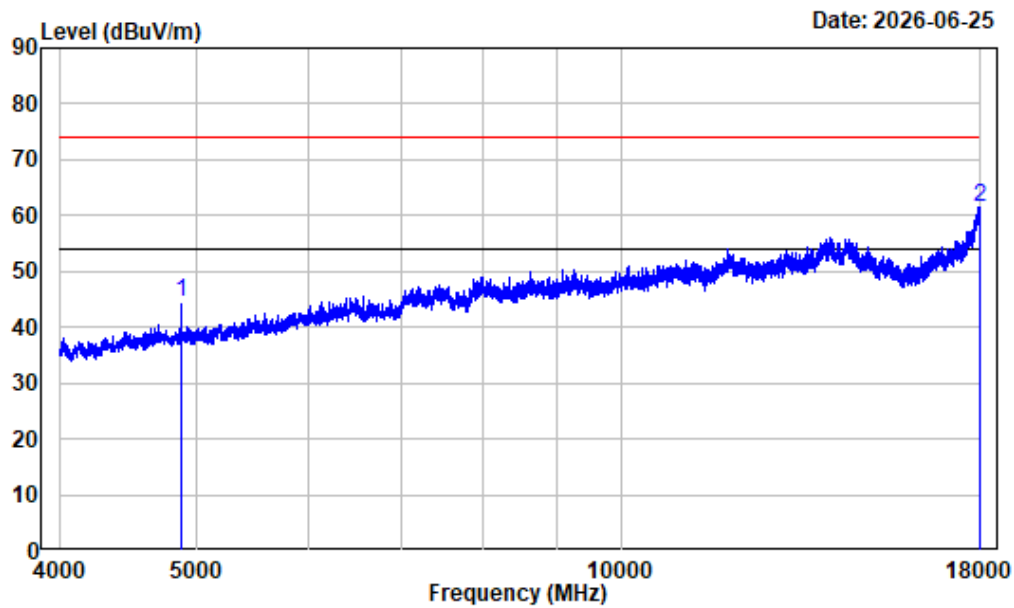

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : LE S8-2440

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4880.000	-7.67	52.03	44.36	74.00	-29.64	Peak
2 17977.250	13.14	48.30	61.44	74.00	-12.56	Peak


4-18GHz_Horizontal_Average_LE S8_2440MHz

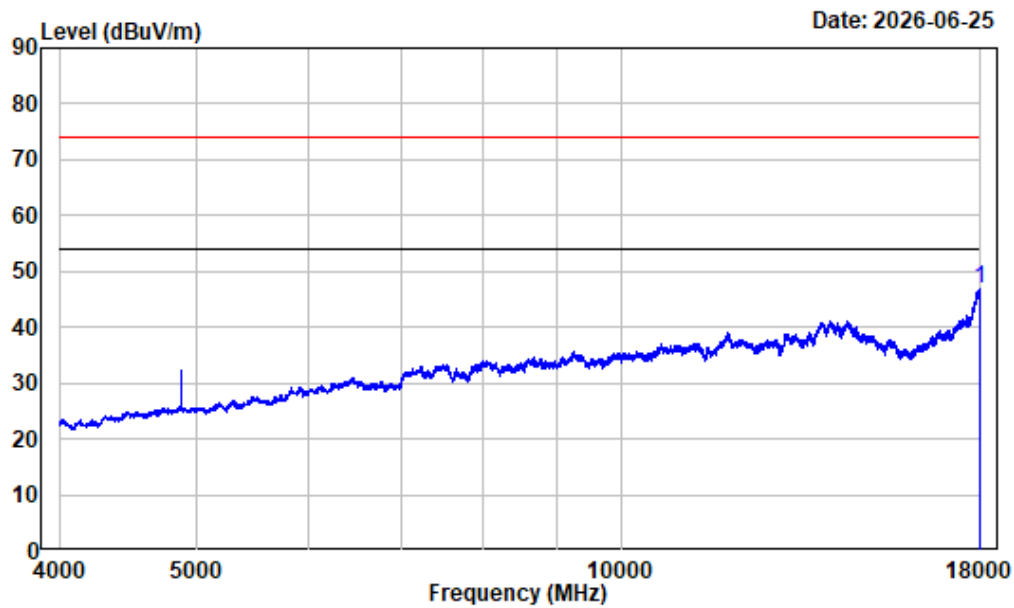

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : LE S8-2440

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17989.500	13.22	33.67	46.89	54.00	-7.11	Average


4-18GHz_Vertical_Peak_LE S8_2440MHz

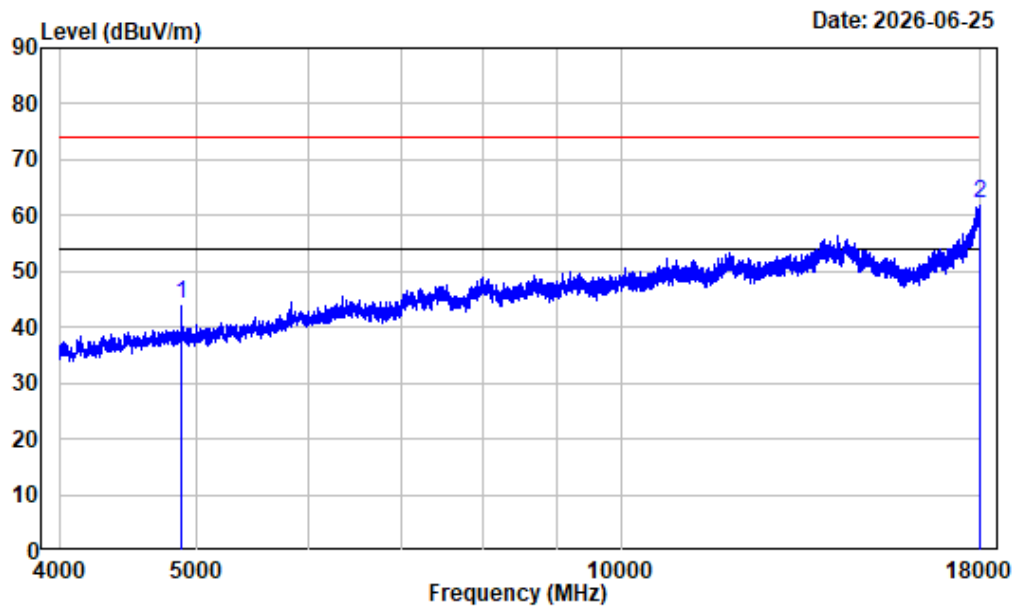

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : LE S8-2440

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 4880.000	-7.67	51.69	44.02	74.00	-29.98 Peak
2 17998.250	13.26	48.89	62.15	74.00	-11.85 Peak


4-18GHz_Vertical_Average_LE S8_2440MHz

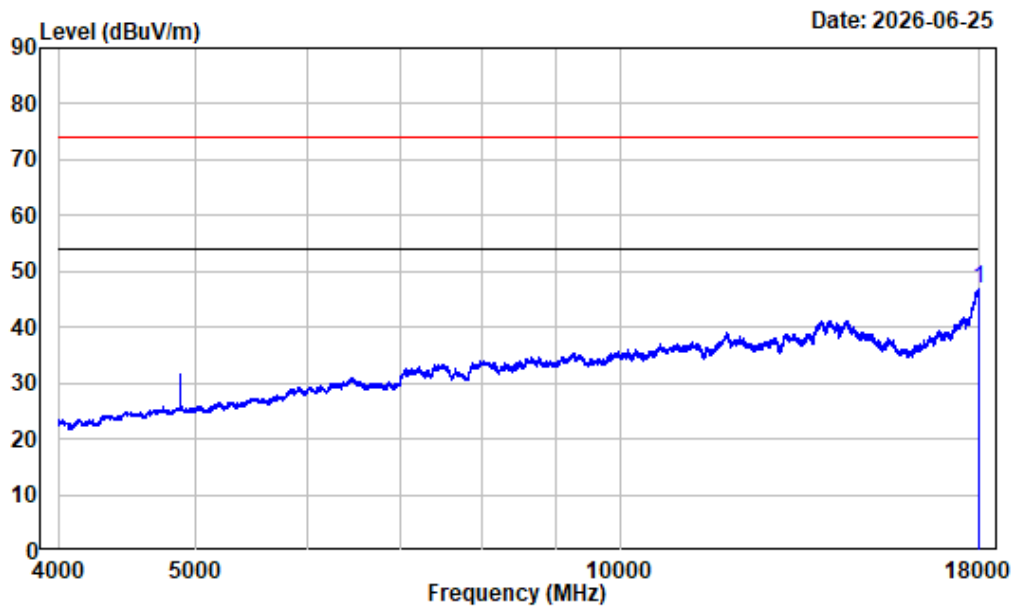

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : LE S8-2440

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17998.630	13.26	33.57	46.83	54.00	-7.17	Average


18-25GHz_Horizontal_Peak_LE S8_2440MHz

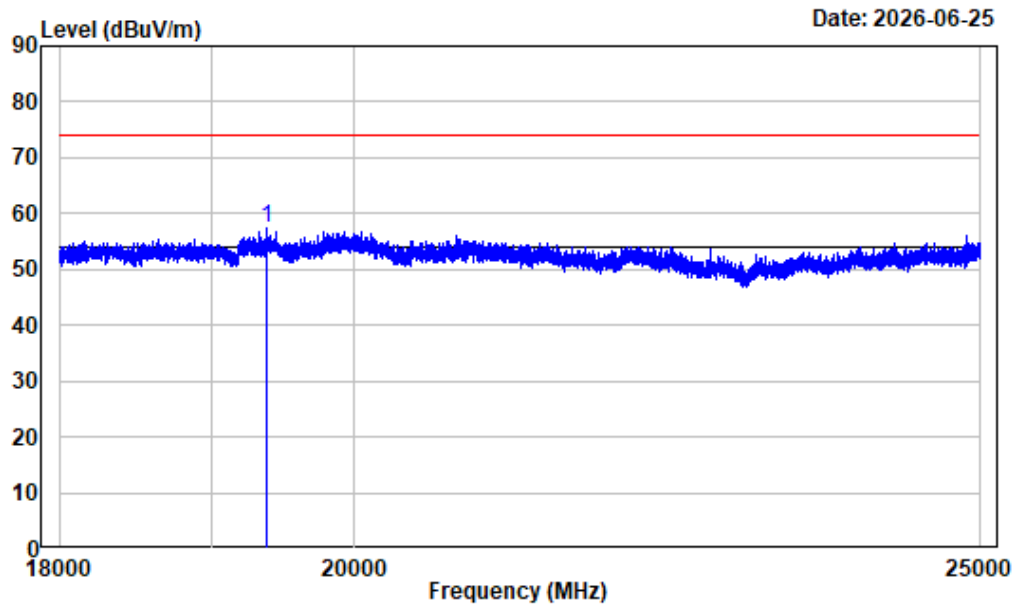

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : LE S8-2440

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 19378.130	17.30	40.05	57.35	74.00	-16.65 Peak


18-25GHz_Horizontal_Average_LE S8_2440MHz

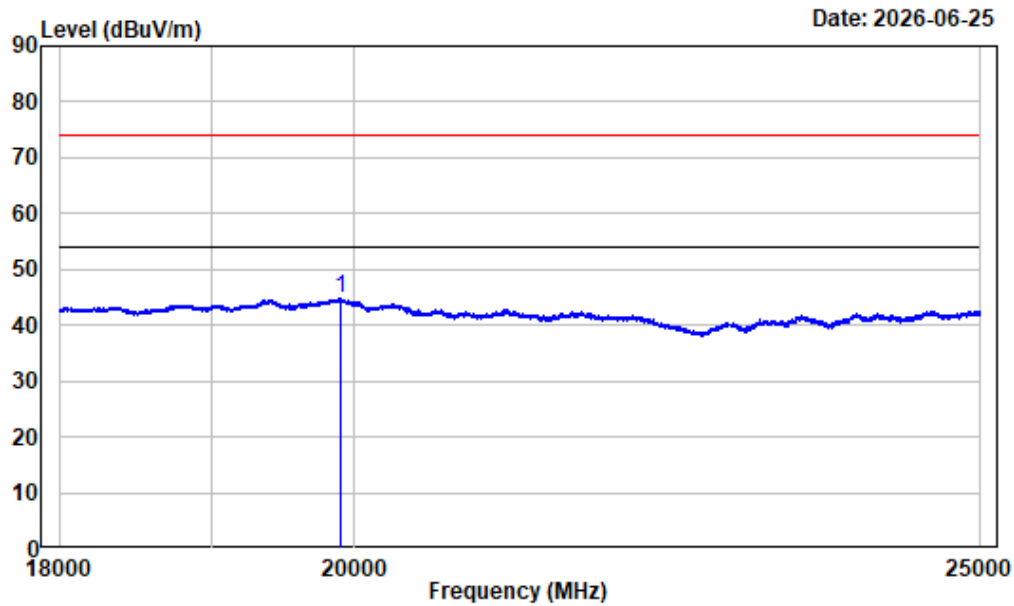

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : LE S8-2440

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 19898.750	17.79	26.94	44.73	54.00	-9.27 Average


18-25GHz_Vertical_Peak_LE S8_2440MHz

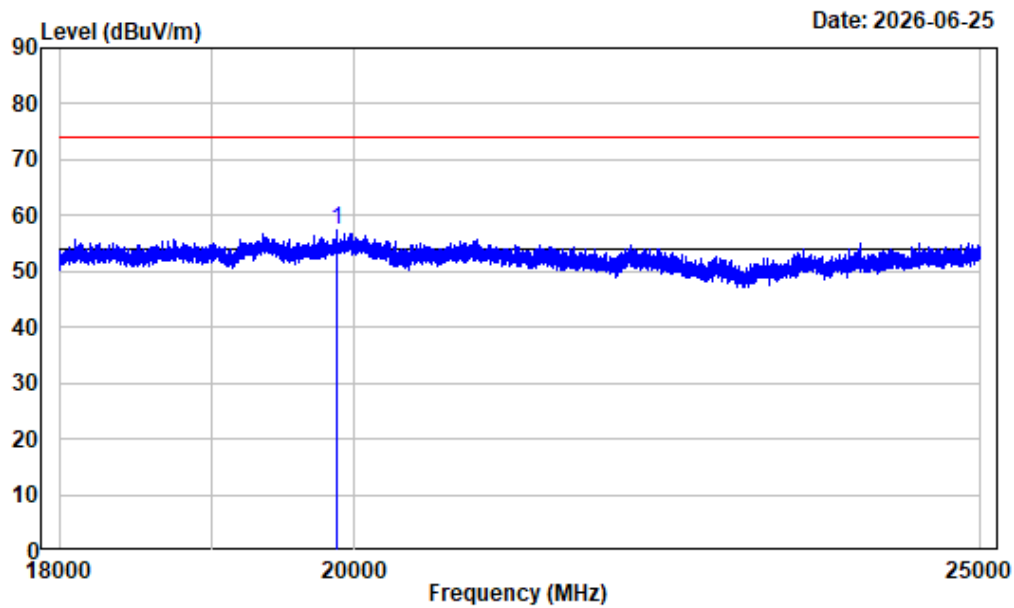

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : LE S8-2440

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 19868.130	17.77	39.49	57.26	74.00	-16.74 Peak

18-25GHz_Vertical_Average_LE S8_2440MHz

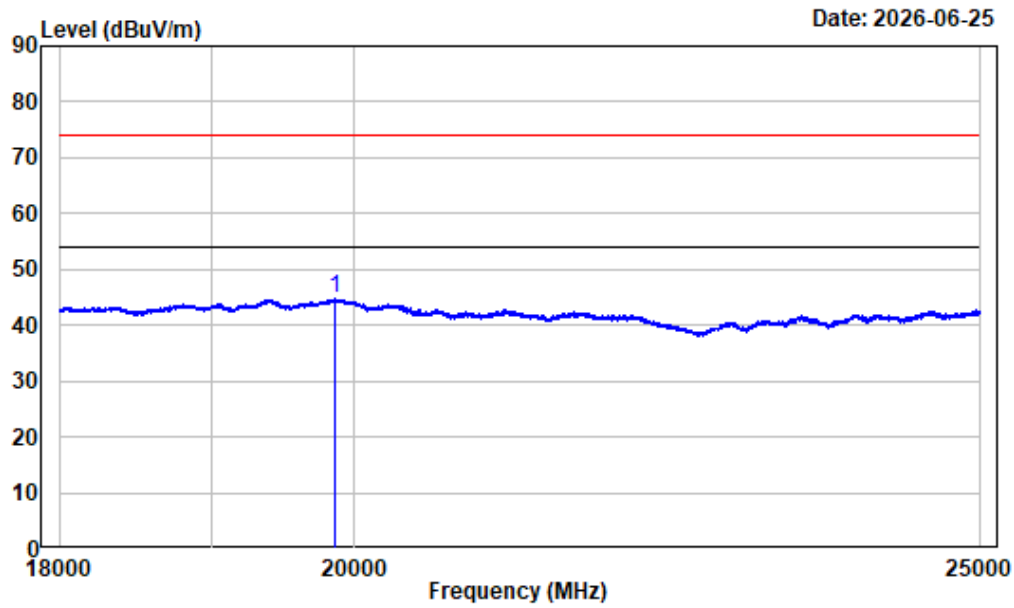


Condition : Vertical
 Project No. : 2601S56424E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
 Note : LE S8-2440

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19862.880	17.78	26.94	44.72	54.00	-9.28	Average

Band Edge


Left Band edge_Horizontal_Peak_BLE 1M

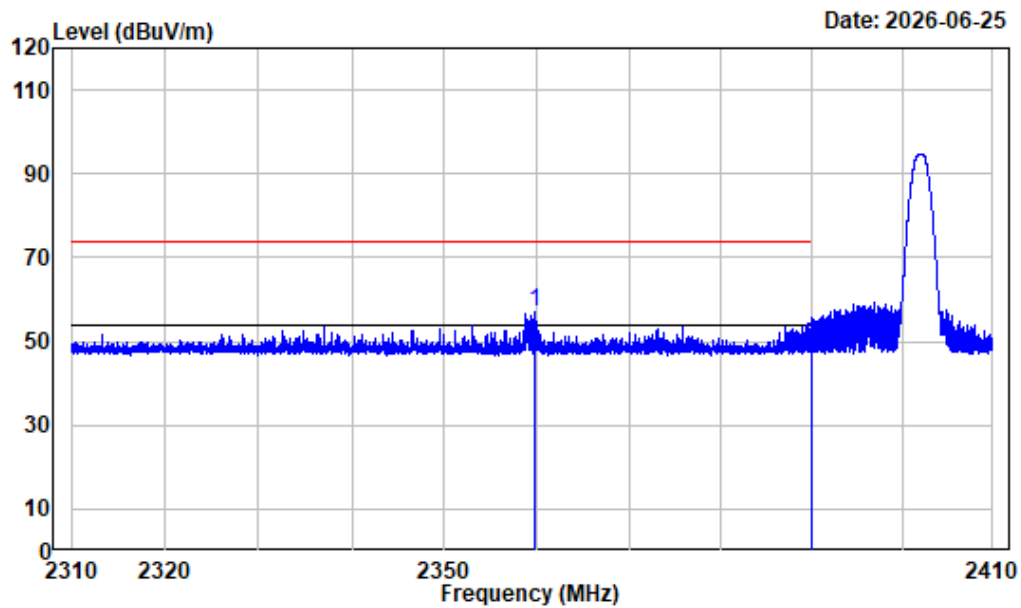

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE1M-2402

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	2359.774	-10.90	68.03	57.13	74.00	-16.87	Peak
2	2390.000	-10.97	59.75	48.78	74.00	-25.22	Peak

Left Band edge_Horizontal_Average_BLE 1M

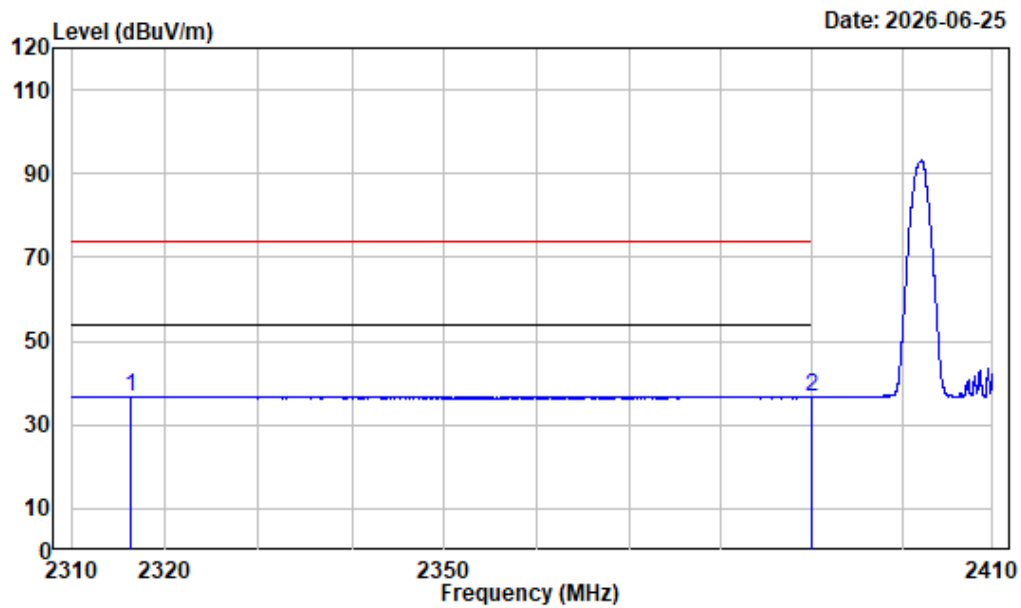

Condition : Horizontal

Project No. : 2601S56424E-RF


Tester : Zenos Qiao

Spectrum setting: Average reading:RBW:1MHz VBW:500Hz Detector:Peak

Note : BLE1M-2402

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	2316.403	-10.80	47.63	36.83	54.00	-17.17	Average
2	2390.000	-10.97	47.61	36.64	54.00	-17.36	Average


Left Band edge_Vertical_Peak_BLE 1M

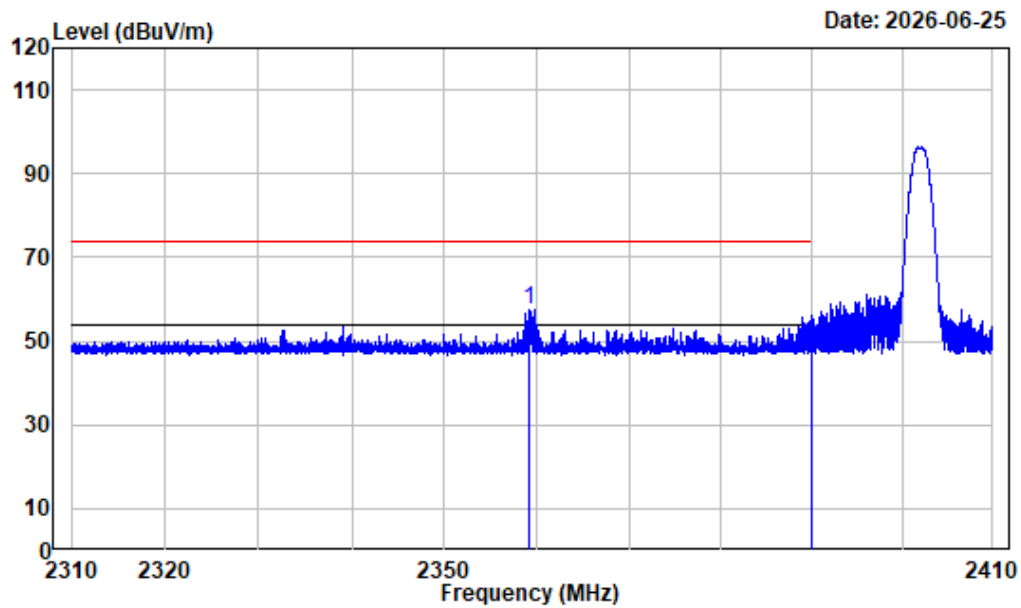

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE1M-2402

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2359.238	-10.90	68.53	57.63	74.00	-16.37	Peak
2 2390.000	-10.97	59.63	48.66	74.00	-25.34	Peak


Left Band edge_Vertical_Average_BLE 1M

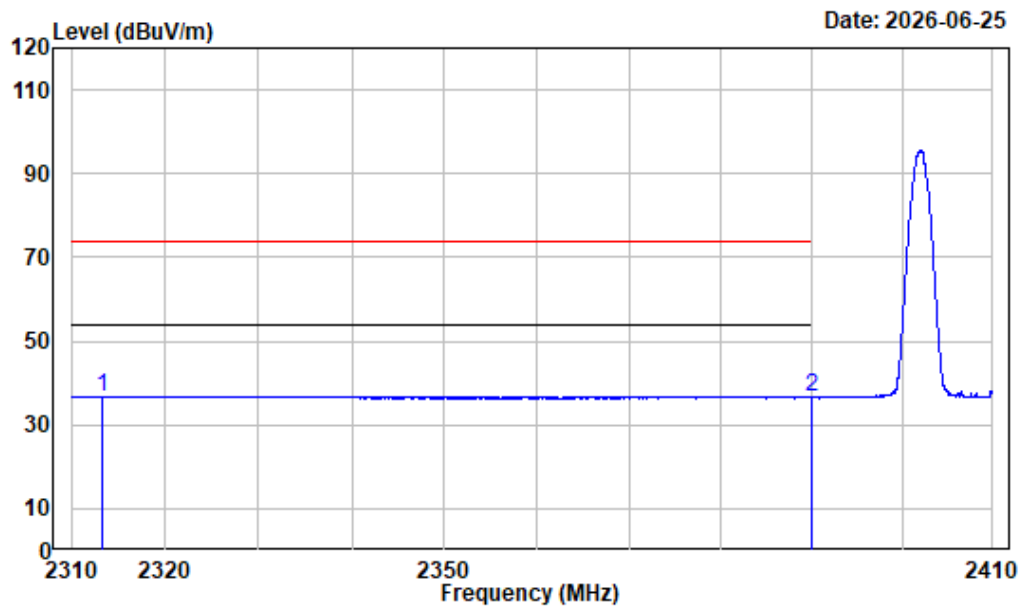

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:500Hz Detector:Peak
Note : BLE1M-2402

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	2313.364	-10.79	47.65	36.86	54.00	-17.14 Average
2	2390.000	-10.97	47.55	36.58	54.00	-17.42 Average


Right Band edge_Horizontal_Peak_BLE 1M

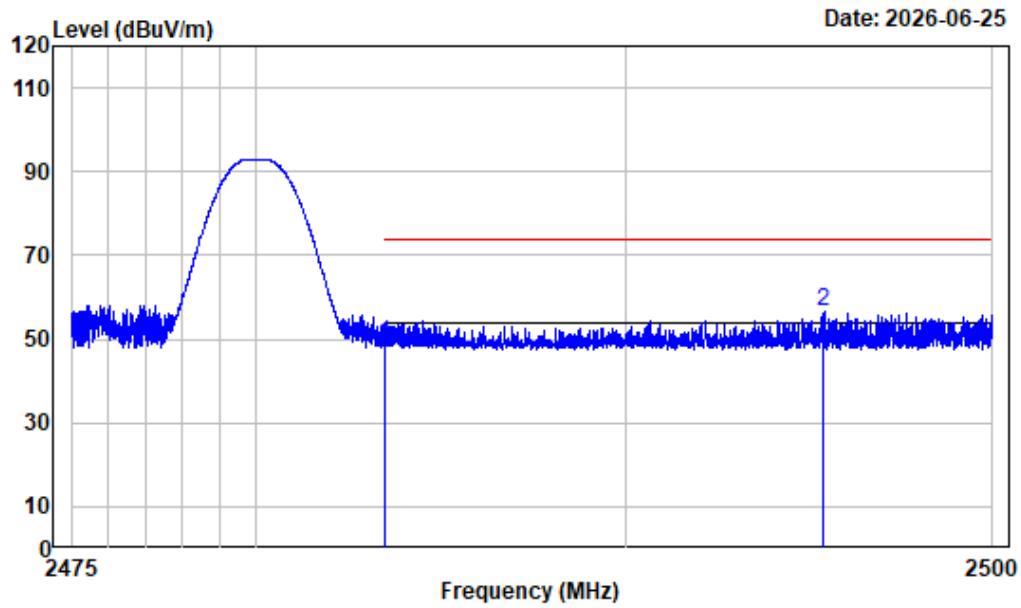

Condition : Horizontal
 Project No. : 2601S56424E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : BLE1M-2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	59.75	48.82	74.00	-25.18	Peak
2	2495.410	-10.95	67.45	56.50	74.00	-17.50	Peak


Right Band edge_Horizontal_Average_BLE 1M

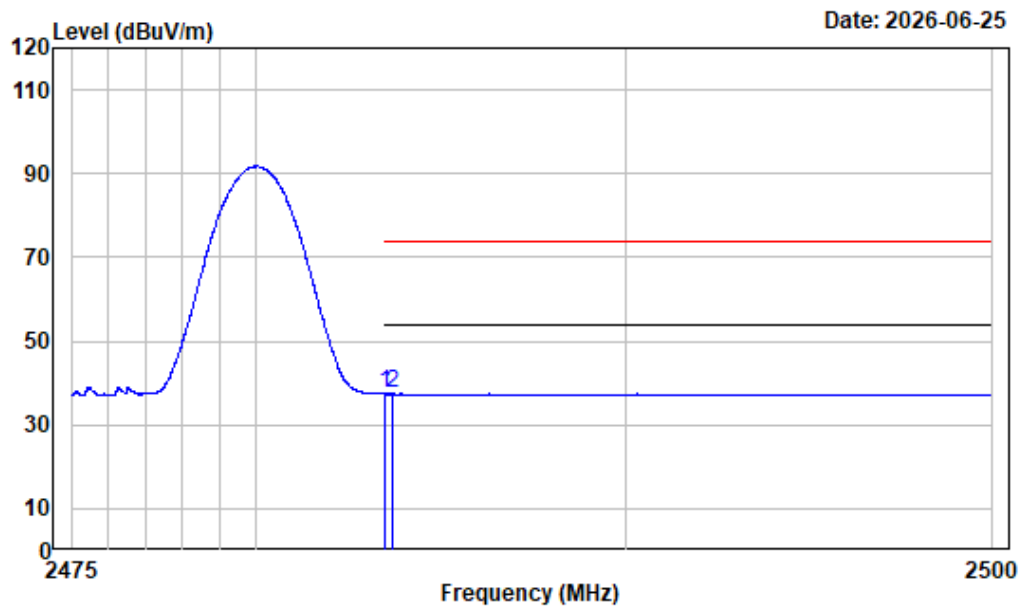

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:500Hz Detector:Peak
Note : BLE1M-2480

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 2483.500	-10.93	48.37	37.44	54.00	-16.56 Average
2 2483.673	-10.93	48.40	37.47	54.00	-16.53 Average


Right Band edge_Vertical_Peak_BLE 1M

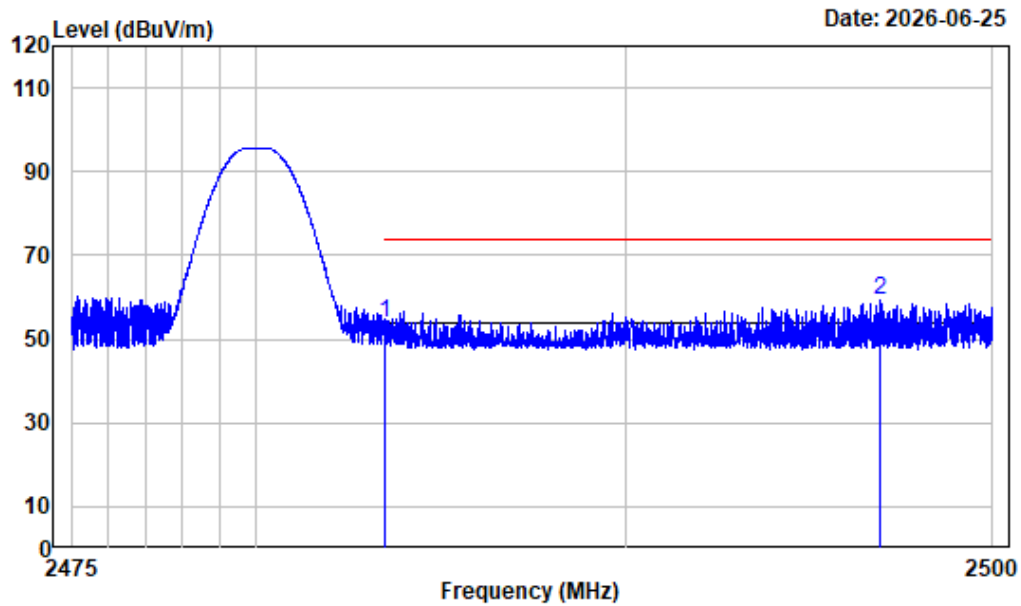

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE1M-2480

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 2483.500	-10.93	64.82	53.89	74.00	-20.11 Peak
2 2496.917	-10.94	70.46	59.52	74.00	-14.48 Peak


Right Band edge_Vertical_Average_BLE 1M

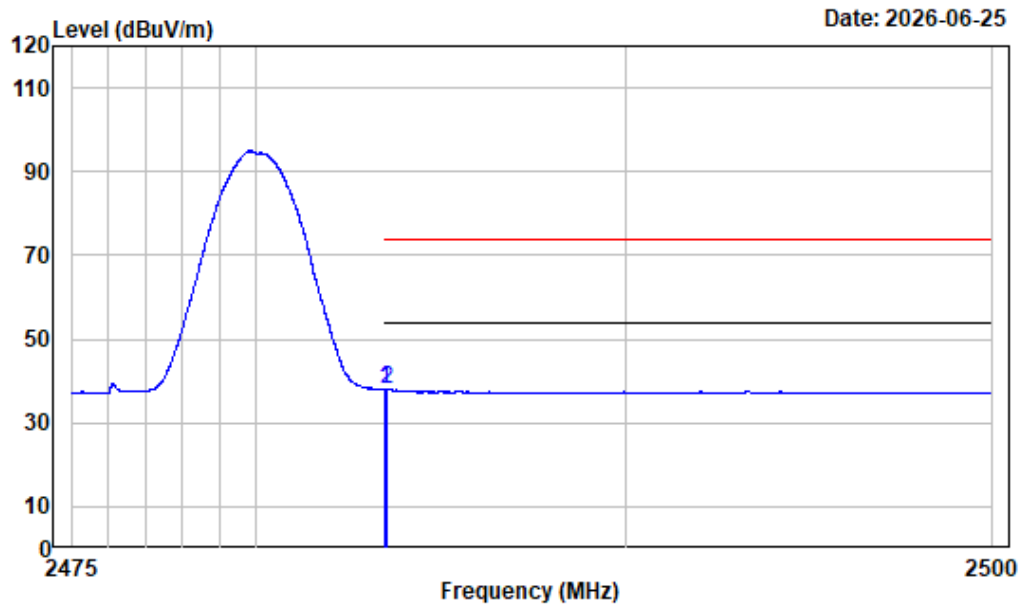

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:500Hz Detector:Peak
Note : BLE1M-2480

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	48.89	37.96	54.00	-16.04 Average
2	2483.515	-10.93	48.93	38.00	54.00	-16.00 Average


Left Band edge_Horizontal_Peak_BLE 2M

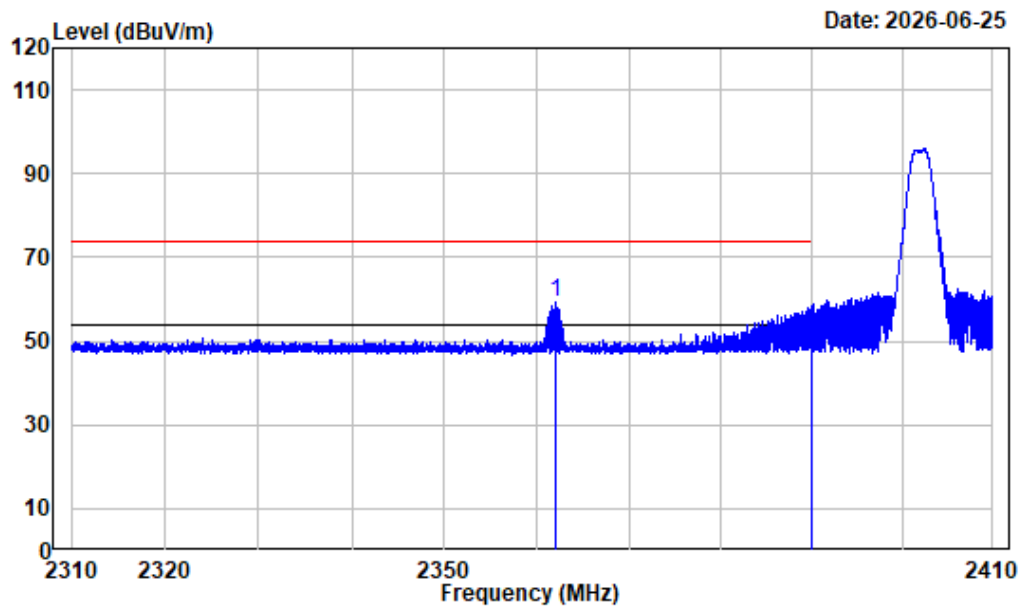

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE2M-2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2362.146	-10.91	70.45	59.54	74.00	-14.46	Peak
2	2390.000	-10.97	59.53	48.56	74.00	-25.44	Peak


Left Band edge_Horizontal_Average_BLE 2M

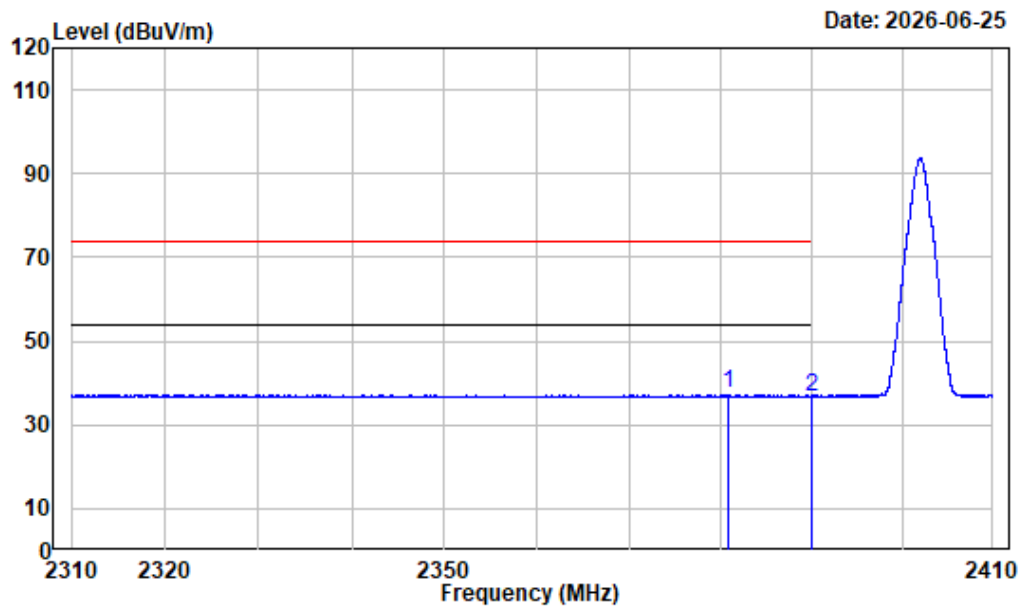

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : BLE2M-2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2380.801	-10.95	48.31	37.36	54.00	-16.64	Average
2	2390.000	-10.97	47.84	36.87	54.00	-17.13	Average


Left Band edge_Vertical_Peak_BLE 2M

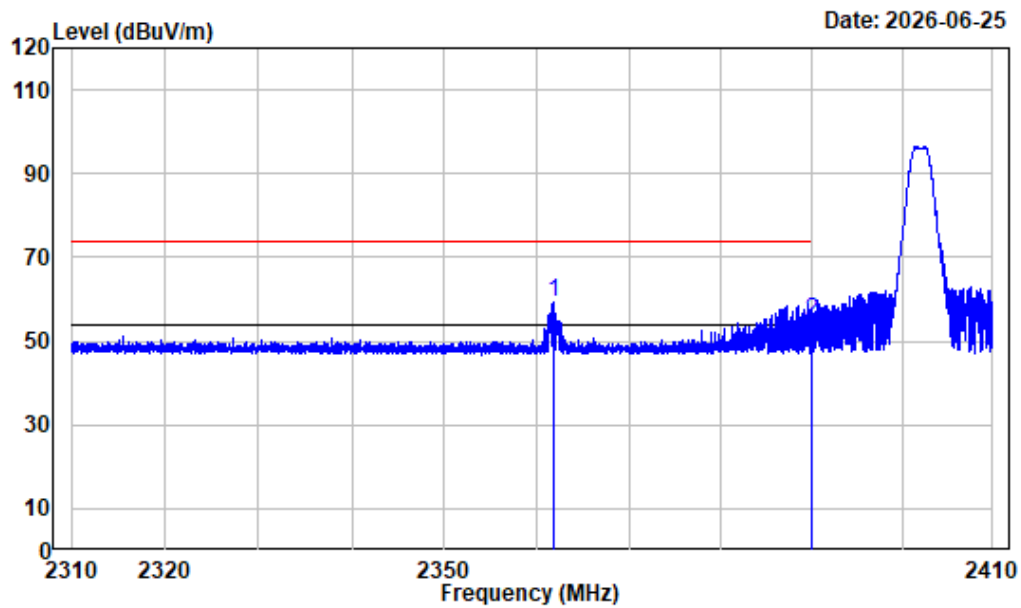

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE2M-2402

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2361.903	-10.91	70.30	59.39	74.00	-14.61	Peak
2	2390.000	-10.97	65.89	54.92	74.00	-19.08	Peak


Left Band edge_Vertical_Average_BLE 2M

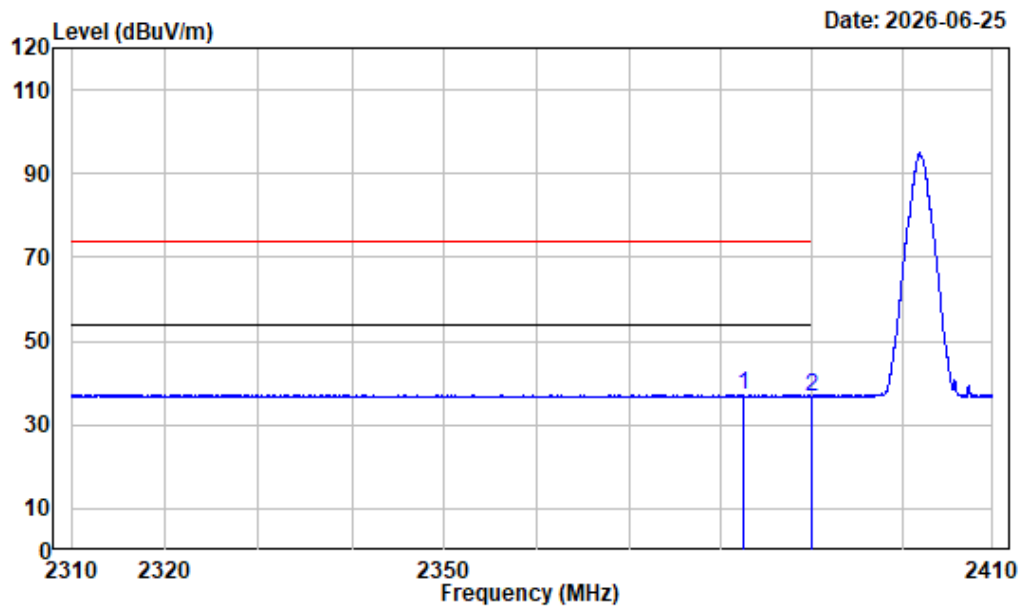

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : BLE2M-2402

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2382.508	-10.96	48.24	37.28	54.00	-16.72	Average
2	2390.000	-10.97	47.57	36.60	54.00	-17.40	Average


Right Band edge_Horizontal_Peak_BLE 2M

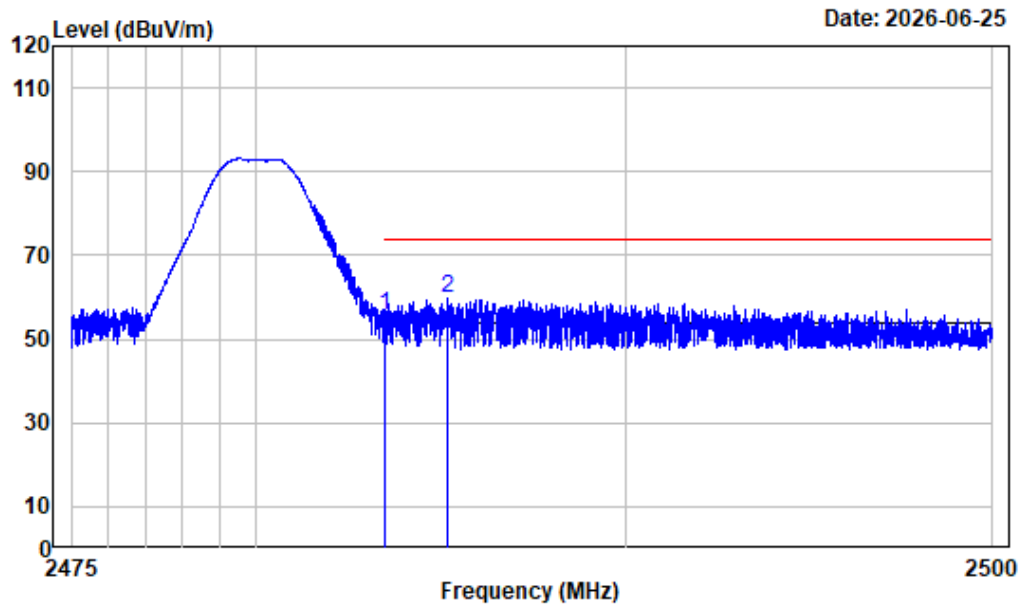

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE2M-2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	66.40	55.47	74.00	-18.53	Peak
2	2485.188	-10.93	70.63	59.70	74.00	-14.30	Peak


Right Band edge_Horizontal_Average_BLE 2M

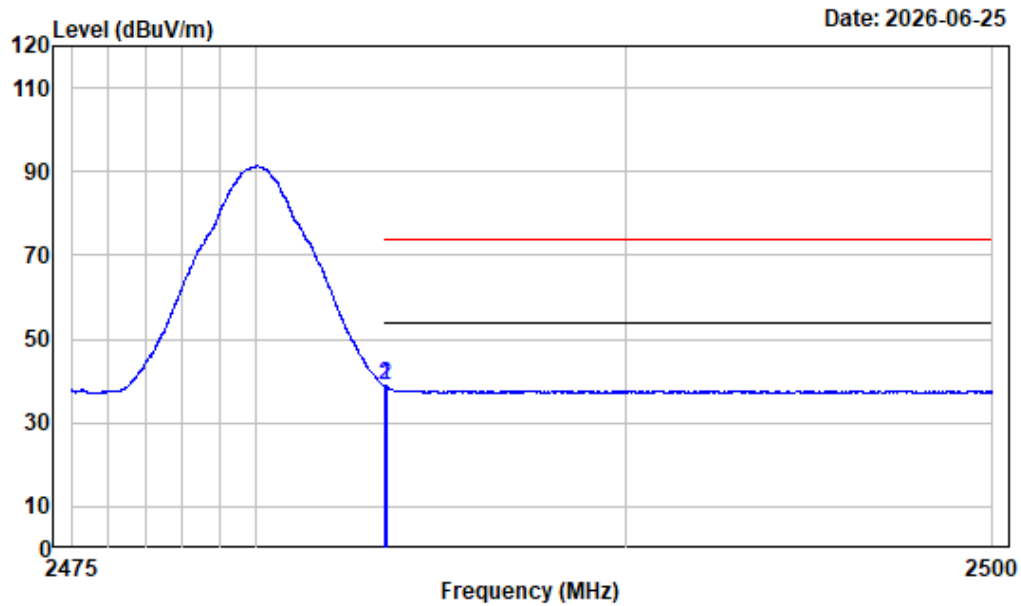

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : BLE2M-2480

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 2483.500	-10.93	49.80	38.87	54.00	-15.13 Average
2 2483.508	-10.93	49.82	38.89	54.00	-15.11 Average


Right Band edge_Vertical_Peak_BLE 2M

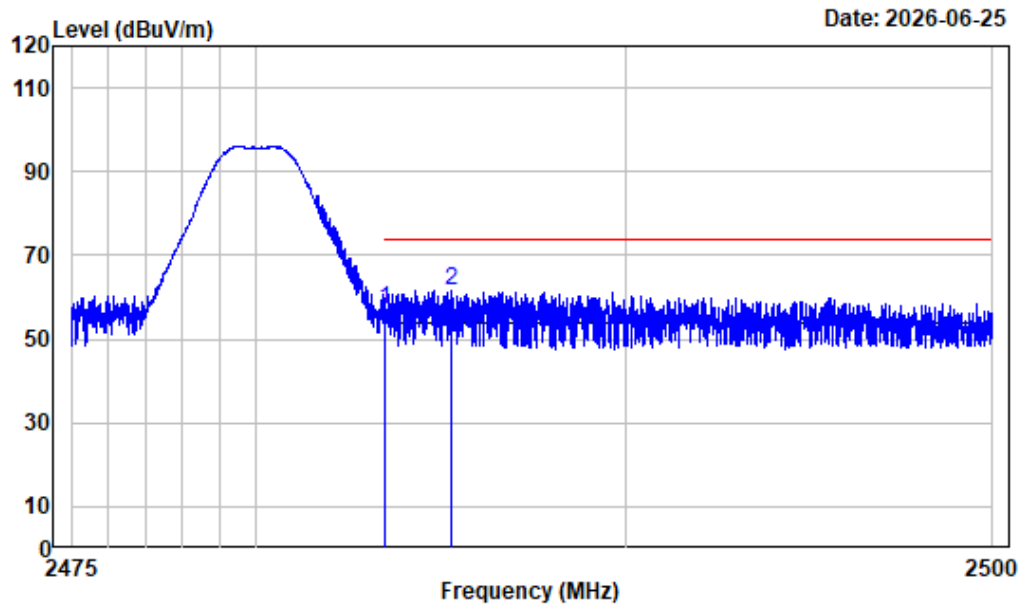

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE2M-2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	68.16	57.23	74.00	-16.77	Peak
2	2485.262	-10.93	72.55	61.62	74.00	-12.38	Peak


Right Band edge_Vertical_Average_BLE 2M

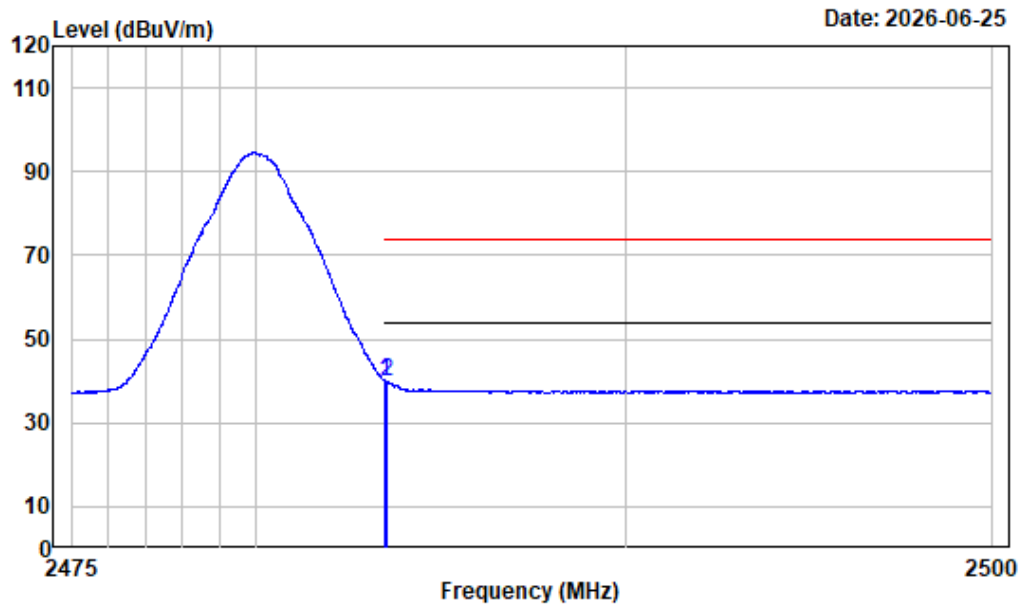

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : BLE2M-2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	50.76	39.83	54.00	-14.17	Average
2	2483.513	-10.93	50.83	39.90	54.00	-14.10	Average


Left Band edge_Horizontal_Peak_LE S2

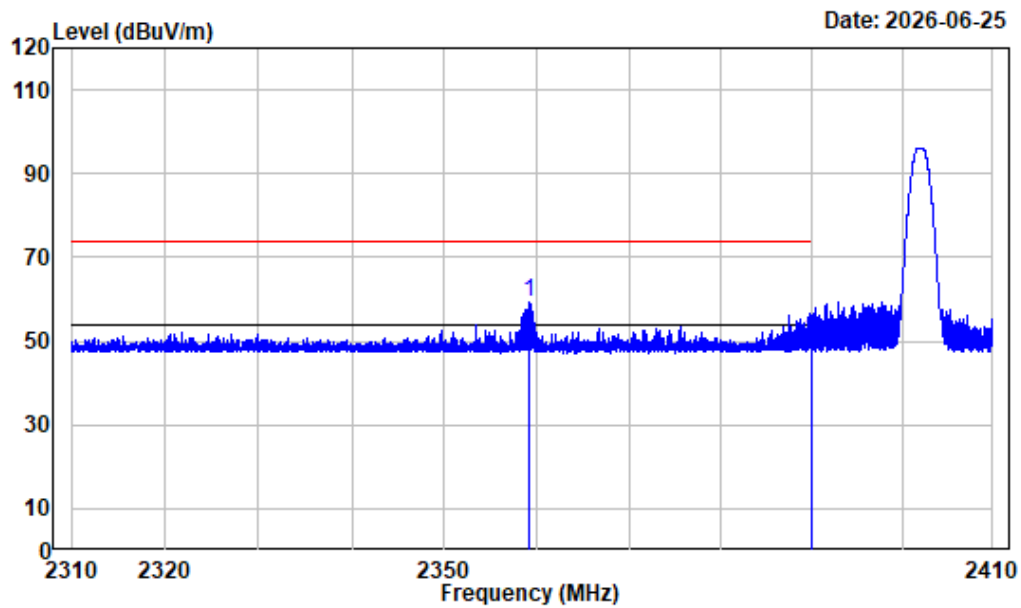

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : LE S2-2402

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2359.100	-10.90	70.40	59.50	74.00	-14.50	Peak
2	2390.000	-10.97	61.31	50.34	74.00	-23.66	Peak


Left Band edge_Horizontal_Average_LE S2

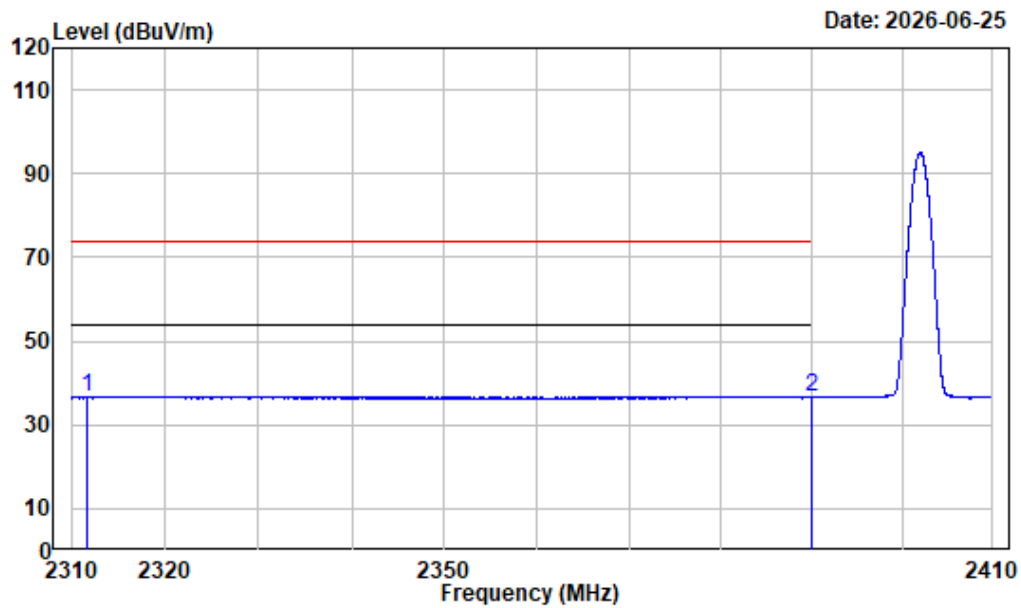

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : LE S2-2402

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 2311.688	-10.79	47.59	36.80	54.00	-17.20 Average
2 2390.000	-10.97	47.58	36.61	54.00	-17.39 Average


Left Band edge_Vertical_Peak_LE S2

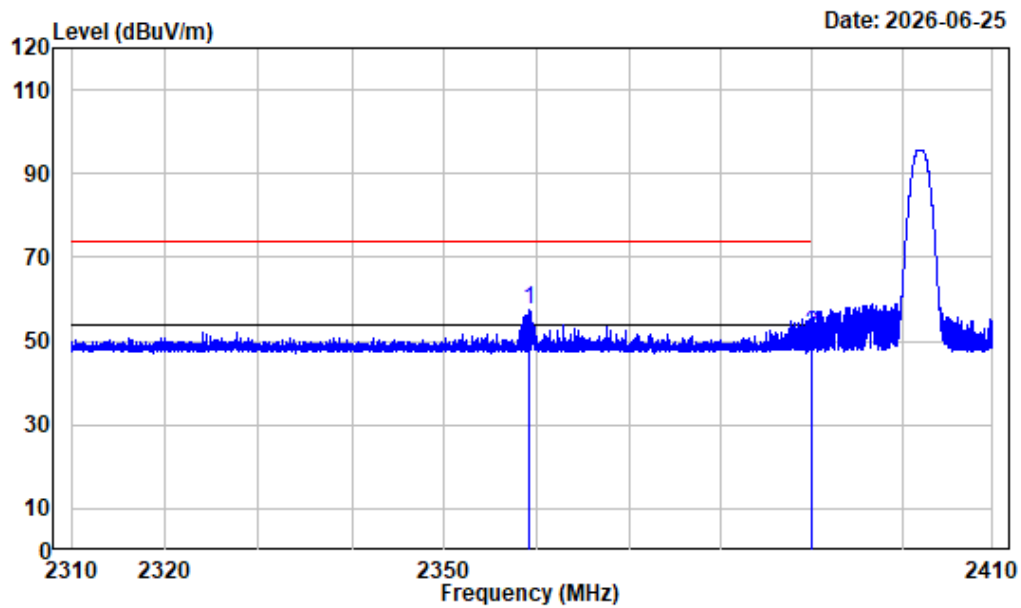

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : LE S2-2402

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2359.100	-10.90	68.25	57.35	74.00	-16.65 Peak
2	2390.000	-10.97	62.64	51.67	74.00	-22.33 Peak


Left Band edge_Vertical_Average_LE S2

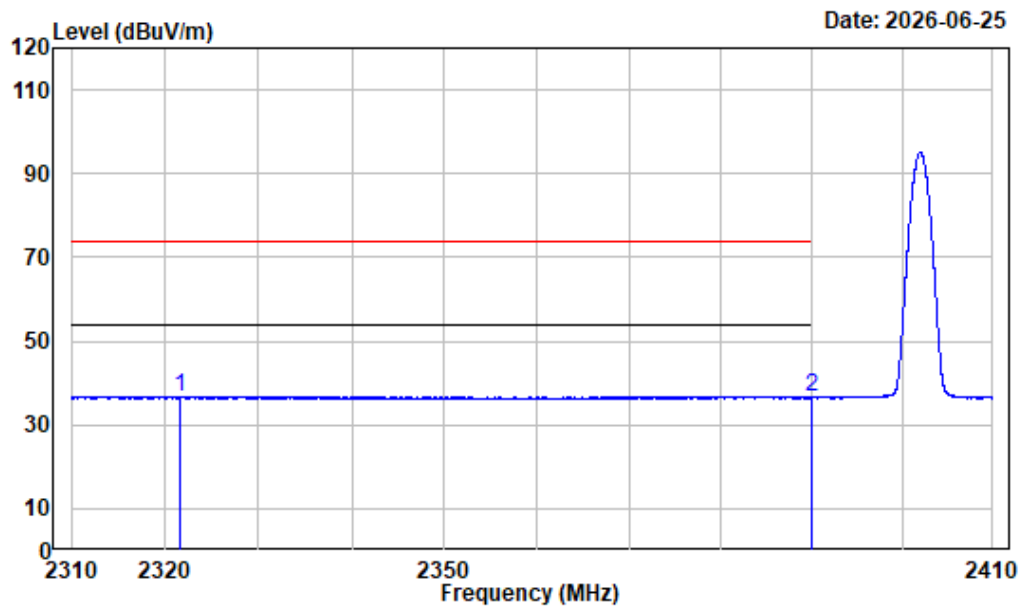

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : LE S2-2402

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2321.613	-10.81	47.54	36.73	54.00	-17.27	Average
2 2390.000	-10.97	47.46	36.49	54.00	-17.51	Average


Right Band edge_Horizontal_Peak_LE S2

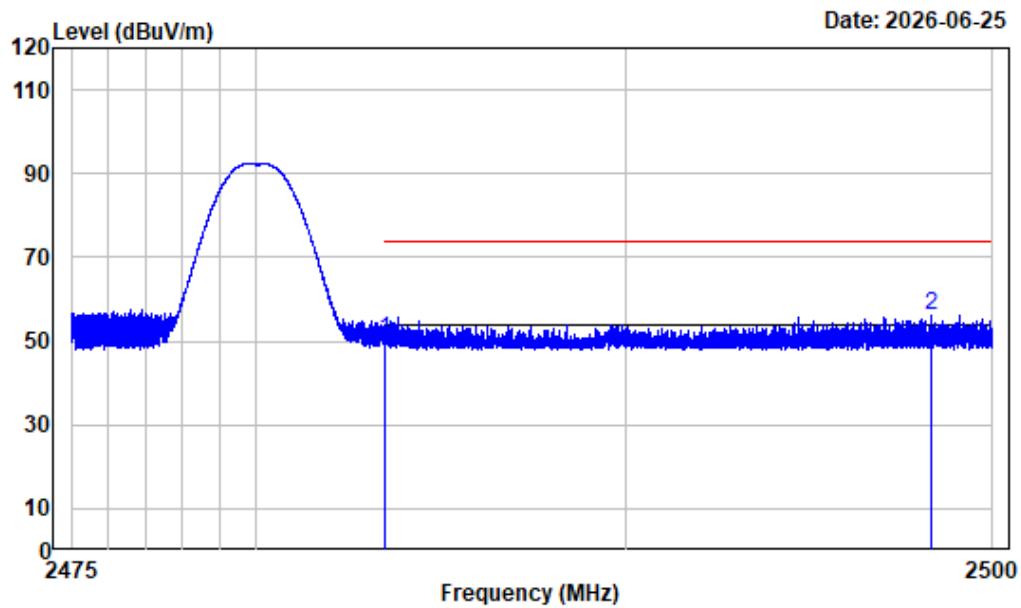

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : LE S2-2480

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 2483.500	-10.93	61.19	50.26	74.00	-23.74 Peak
2 2498.341	-10.95	67.16	56.21	74.00	-17.79 Peak


Right Band edge_Horizontal_Average_LE S2

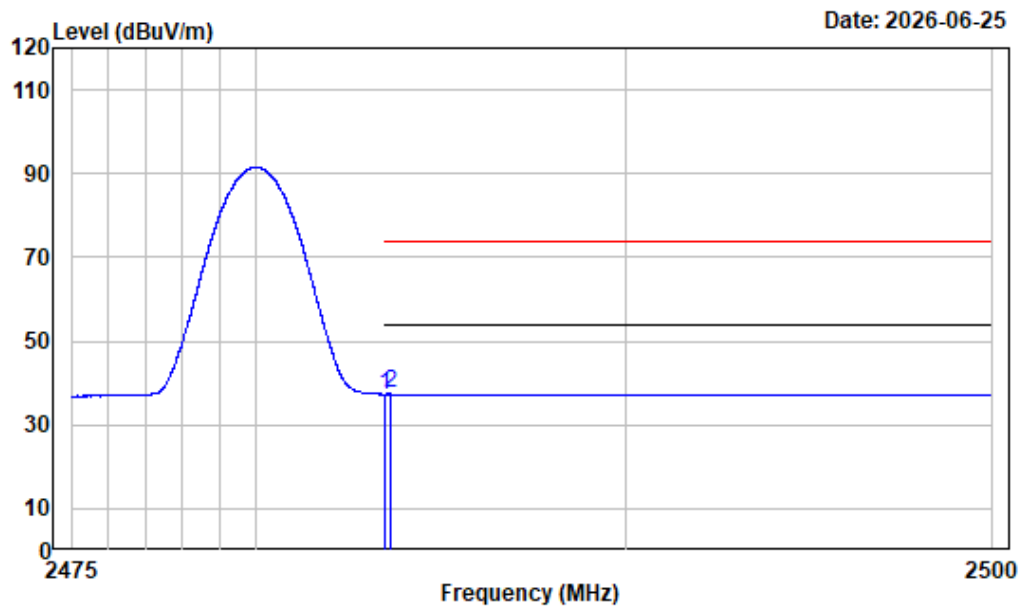

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : LE S2-2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	48.23	37.30	54.00	-16.70	Average
2	2483.647	-10.93	48.32	37.39	54.00	-16.61	Average


Right Band edge_Vertical_Peak_LE S2

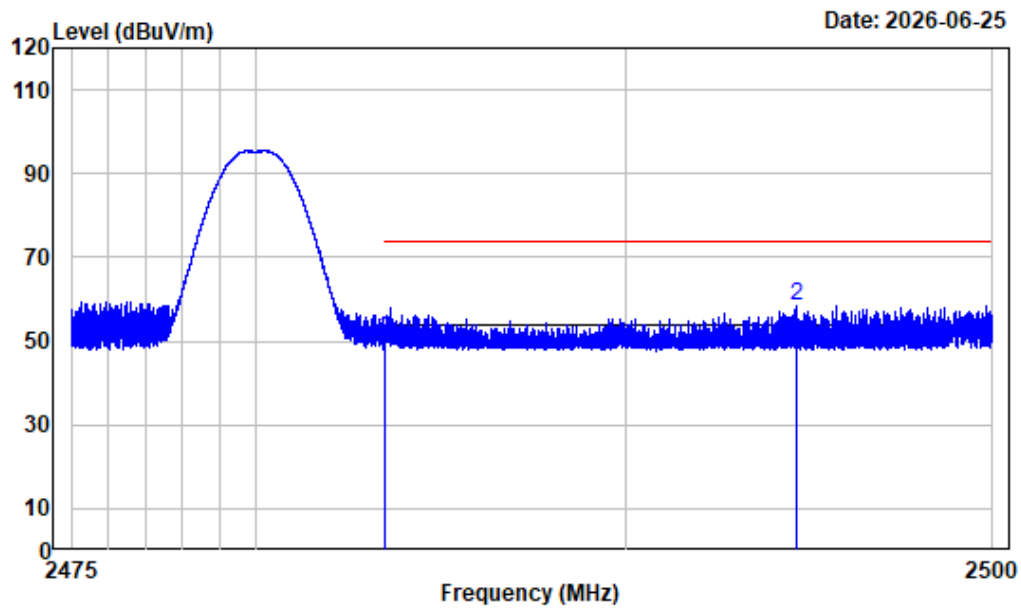

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : LE S2-2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	61.69	50.76	74.00	-23.24	Peak
2	2494.647	-10.95	69.45	58.50	74.00	-15.50	Peak


Right Band edge_Vertical_Average_LE S2

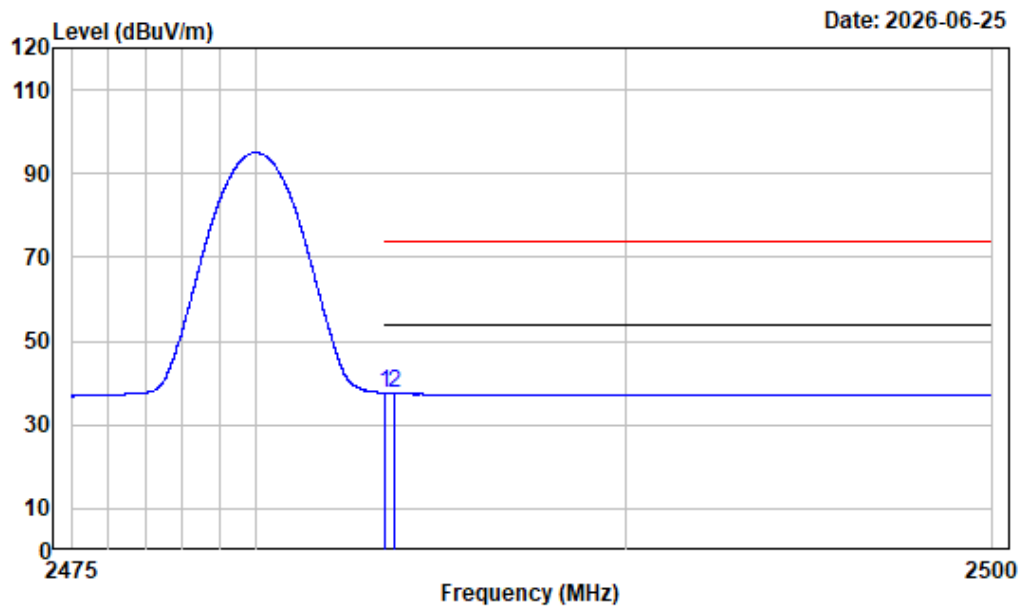

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:300Hz Detector:Peak
Note : LE S2-2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	48.50	37.57	54.00	-16.43	Average
2	2483.747	-10.93	48.58	37.65	54.00	-16.35	Average


Left Band edge_Horizontal_Peak_LE S8

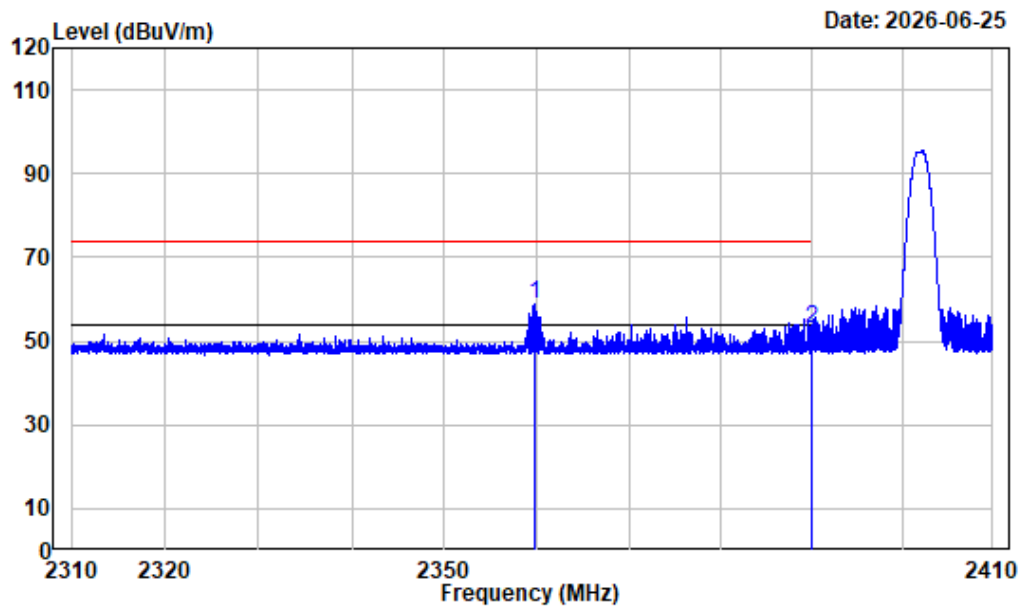

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : LE S8-2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2359.855	-10.90	69.72	58.82	74.00	-15.18	Peak
2	2390.000	-10.97	63.91	52.94	74.00	-21.06	Peak


Left Band edge_Horizontal_Average_LE S8

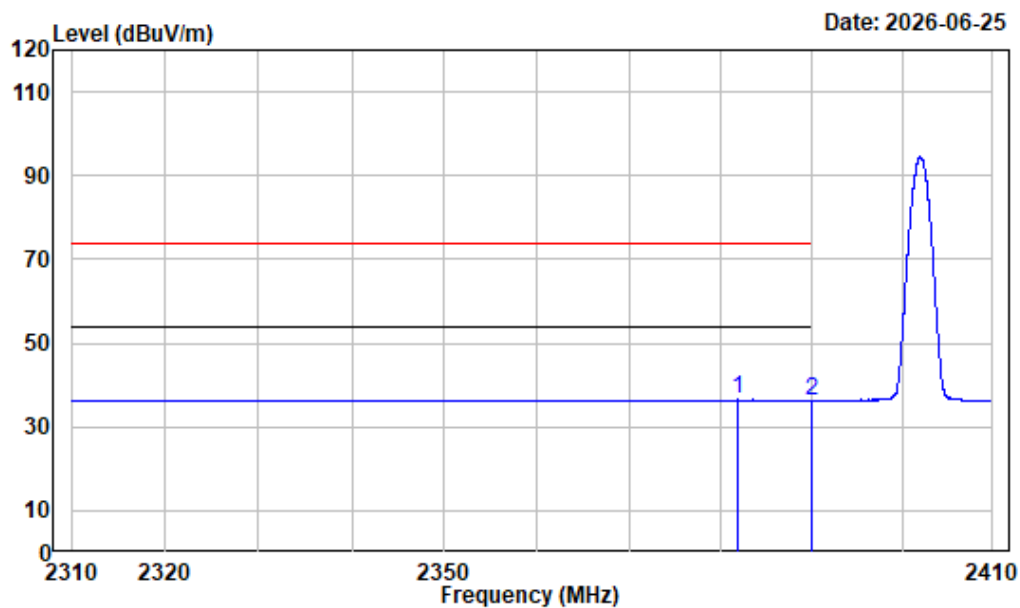

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:100Hz Detector:Peak
Note : LE S8-2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2381.925	-10.95	47.46	36.51	54.00	-17.49	Average
2	2390.000	-10.97	47.24	36.27	54.00	-17.73	Average


Left Band edge_Vertical_Peak_LE S8

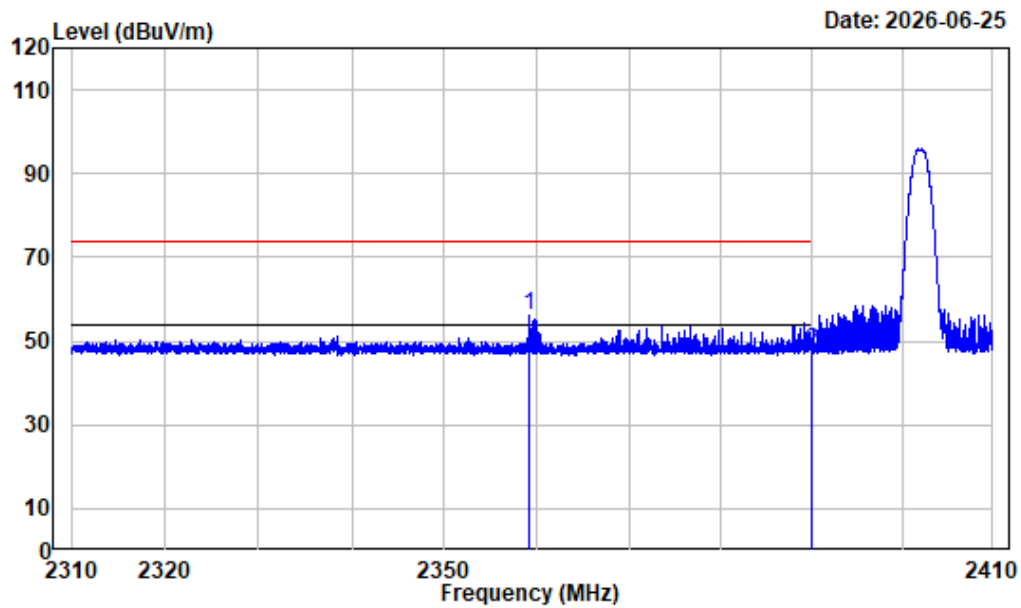

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : LE S8-2402

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2359.205	-10.90	66.86	55.96	74.00	-18.04	Peak
2	2390.000	-10.97	58.44	47.47	74.00	-26.53	Peak


Left Band edge_Vertical_Average_LE S8

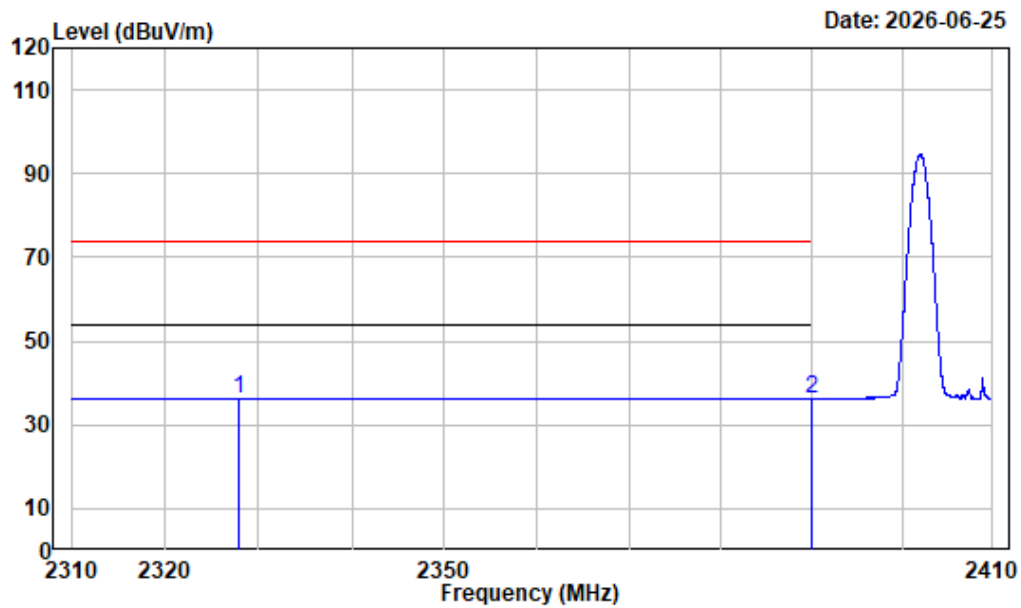

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:100Hz Detector:Peak
Note : LE S8-2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2327.925	-10.83	47.24	36.41	54.00	-17.59	Average
2	2390.000	-10.97	47.29	36.32	54.00	-17.68	Average


Right Band edge_Horizontal_Peak_LE S8

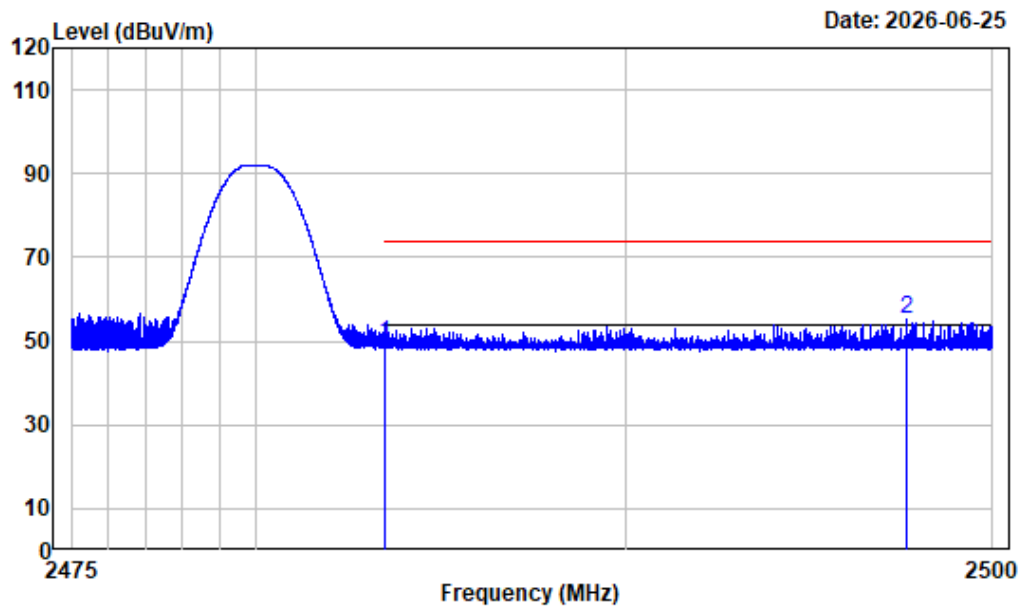

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : LE S8-2480

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 2483.500	-10.93	60.34	49.41	74.00	-24.59 Peak
2 2497.672	-10.95	66.39	55.44	74.00	-18.56 Peak


Right Band edge_Horizontal_Average_LE S8

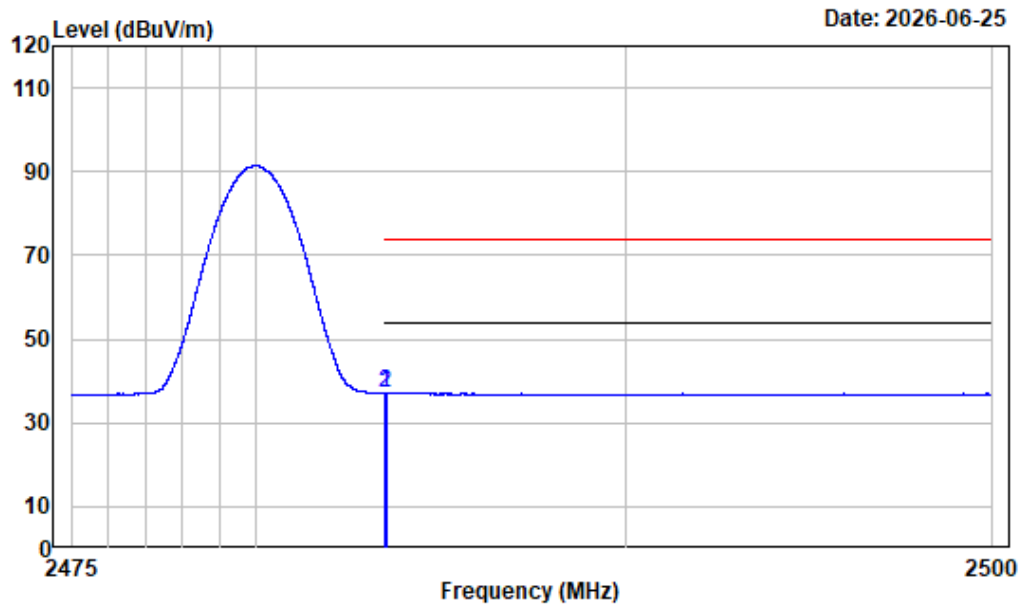

Condition : Horizontal
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:100Hz Detector:Peak
Note : LE S8-2480

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 2483.500	-10.93	48.06	37.13	54.00	-16.87 Average
2 2483.508	-10.93	48.12	37.19	54.00	-16.81 Average


Right Band edge_Vertical_Peak_LE S8

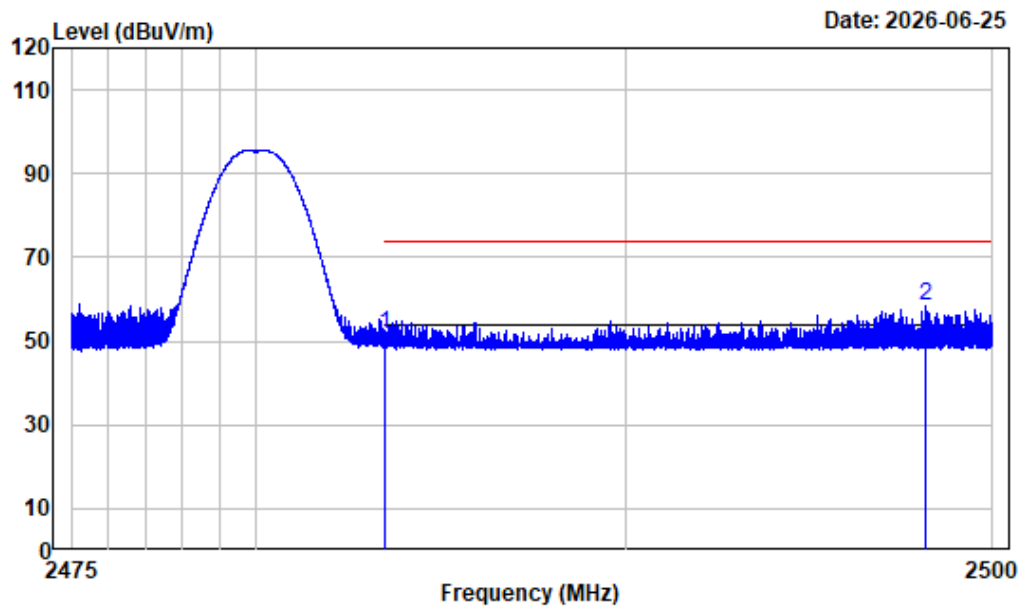

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : LE S8-2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.93	62.61	51.68	74.00	-22.32	Peak
2	2498.181	-10.95	69.36	58.41	74.00	-15.59	Peak

Right Band edge_Vertical_Average_LE S8

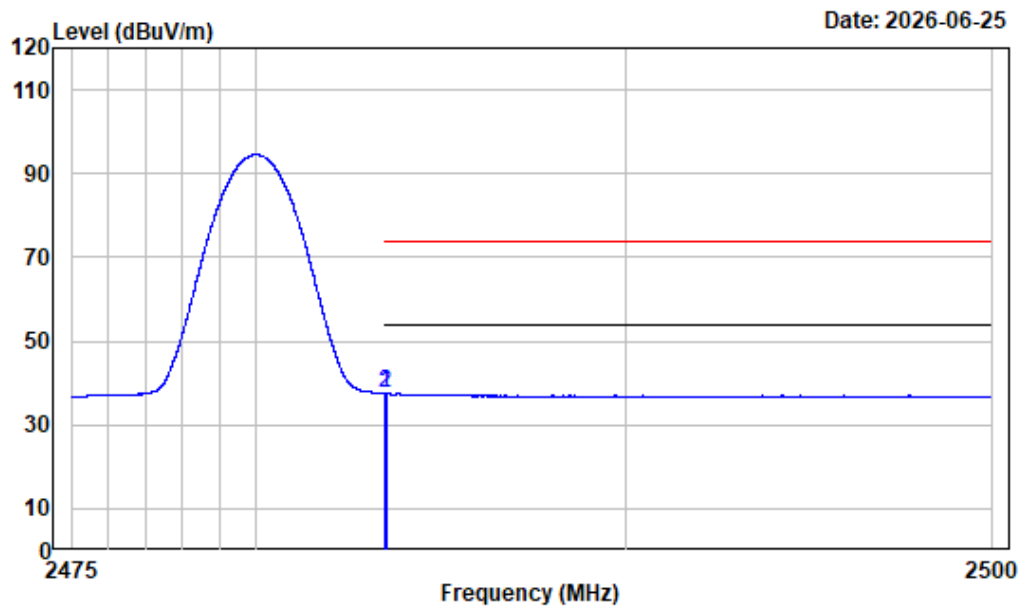

Condition : Vertical
Project No. : 2601S56424E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:100Hz Detector:Peak
Note : LE S8-2480

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 2483.500	-10.93	48.37	37.44	54.00	-16.56 Average
2 2483.509	-10.93	48.41	37.48	54.00	-16.52 Average

RF Conducted data**Test Information:**

Serial No.:	3L8Z-2	Test Date:	2026/06/08
Test Site:	RF	Test Mode:	Transmitting
Tester:	Ethan Bu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.1	Relative Humidity: (%)	69	ATM Pressure: (kPa)	99.7
----------------------	------	------------------------------	----	------------------------	------

6dB Emission Bandwidth**BLE 1M**

Channel	Result (MHz)	Limit (MHz)	Verdict
BLE 1Mbps Low	0.672	≥ 0.5	Pass
BLE 1Mbps Middle	0.671	≥ 0.5	Pass
BLE 1Mbps High	0.673	≥ 0.5	Pass

BLE 2M

Channel	Result (MHz)	Limit (MHz)	Verdict
BLE 2Mbps Low	1.262	≥ 0.5	Pass
BLE 2Mbps Middle	1.249	≥ 0.5	Pass
BLE 2Mbps High	1.255	≥ 0.5	Pass


BLE 125kbps

Channel	Result (MHz)	Limit (MHz)	Verdict
BLE 125kbps Low	0.652	≥ 0.5	Pass
BLE 125kbps Middle	0.644	≥ 0.5	Pass
BLE 125kbps High	0.651	≥ 0.5	Pass

BLE 500kbps


Channel	Result (MHz)	Limit (MHz)	Verdict
BLE 500kbps Low	0.680	≥ 0.5	Pass
BLE 500kbps Middle	0.669	≥ 0.5	Pass
BLE 500kbps High	0.667	≥ 0.5	Pass

BLE_1M_Low_Channel

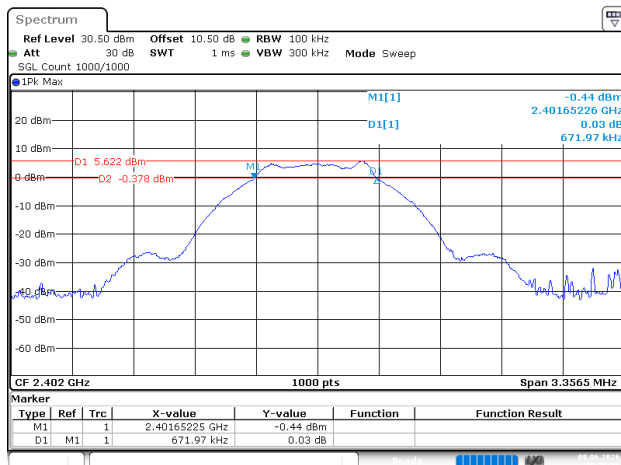


ProjectNo.:2601S56424E-RF Tester:Bthan Bu
Date: 8 JUN.2026 09:35:16

BLE_1M_Middle_Channel

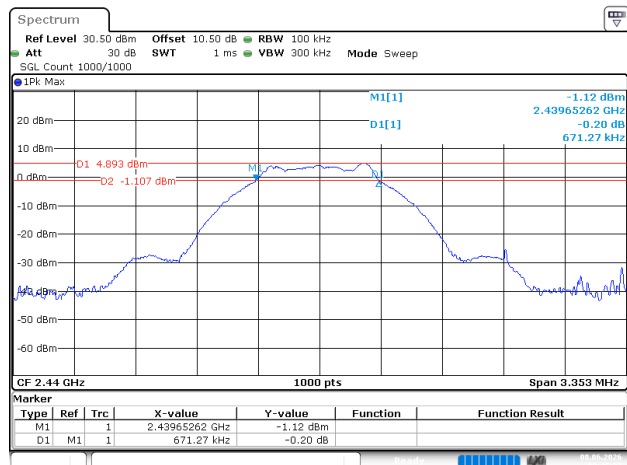


ProjectNo.:2601S56424E-RF Tester:Bthan Bu
Date: 8 JUN.2026 09:46:24

BLE_1M_High_Channel

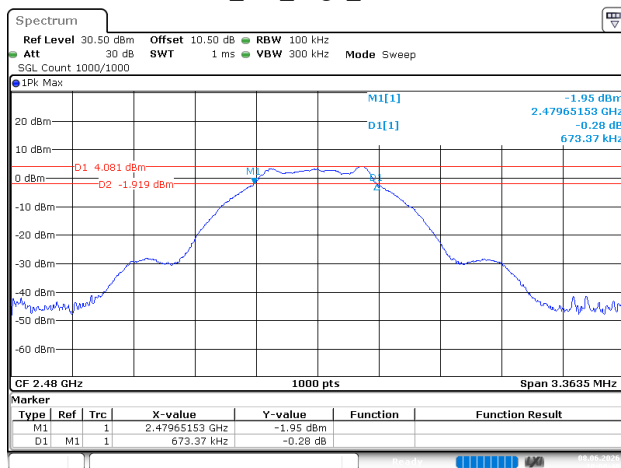


ProjectNo.:2601S56424E-RF Tester:Bthan Bu
Date: 8 JUN.2026 10:00:49

BLE_2M_Low_Channel

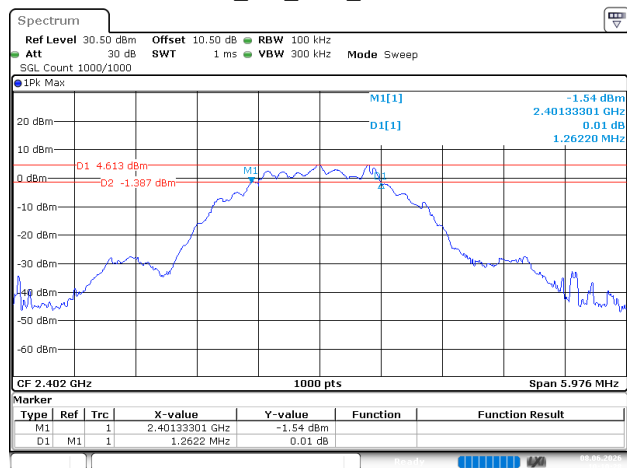


ProjectNo.:2601S56424E-RF Tester:Bthan Bu
Date: 8 JUN.2026 10:10:28

BLE_2M_Middle_Channel

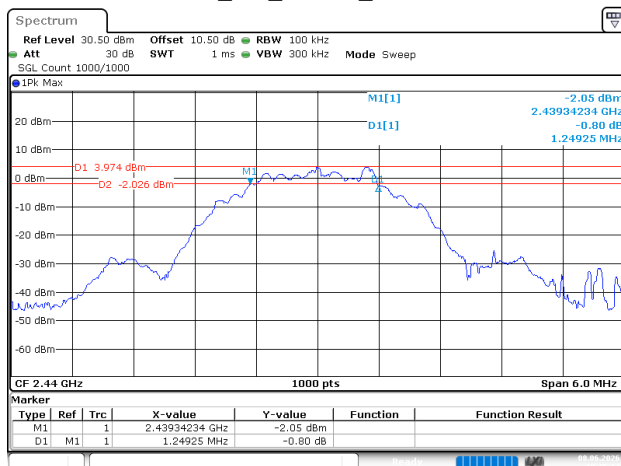


ProjectNo.:2601S56424E-RF Tester:Bthan Bu
Date: 8 JUN.2026 10:15:15

BLE_2M_High_Channel

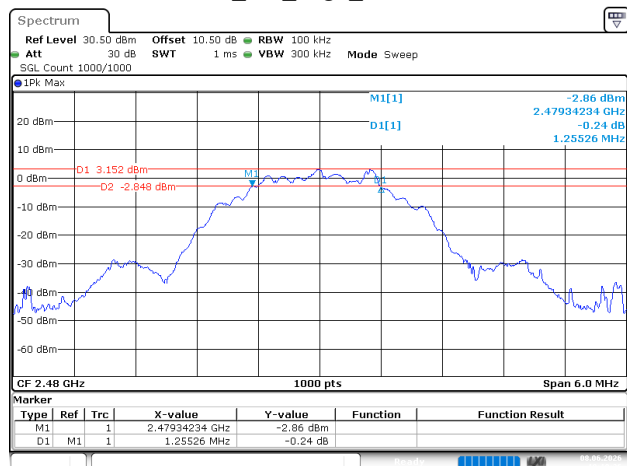


ProjectNo.:2601S56424E-RF Tester:Bthan Bu
Date: 8 JUN.2026 10:18:36

BLE_125kbps_Low_Channel

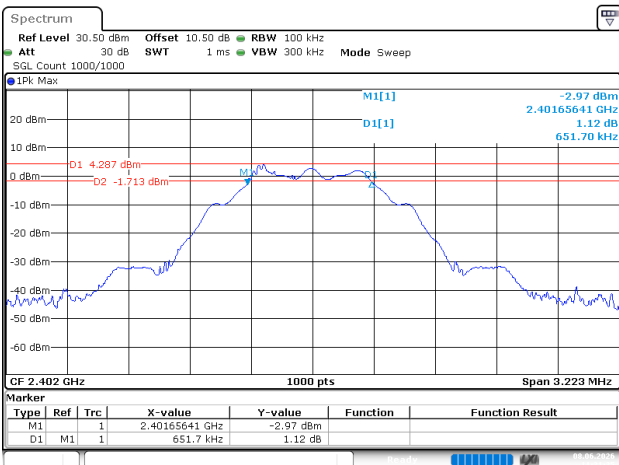


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 11:13:35

BLE_125kbps_Middle_Channel

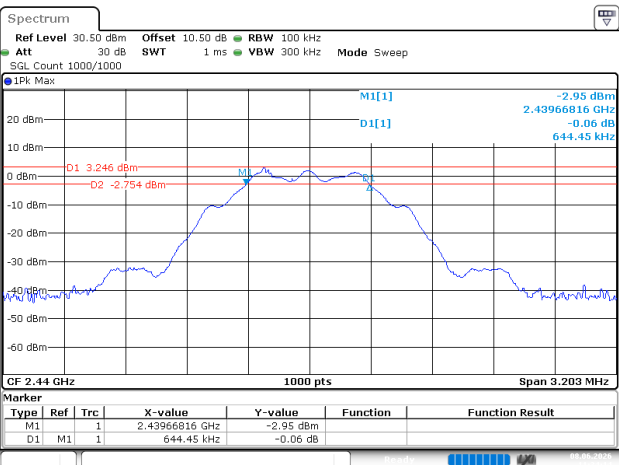


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 11:34:14

BLE_125kbps_High_Channel

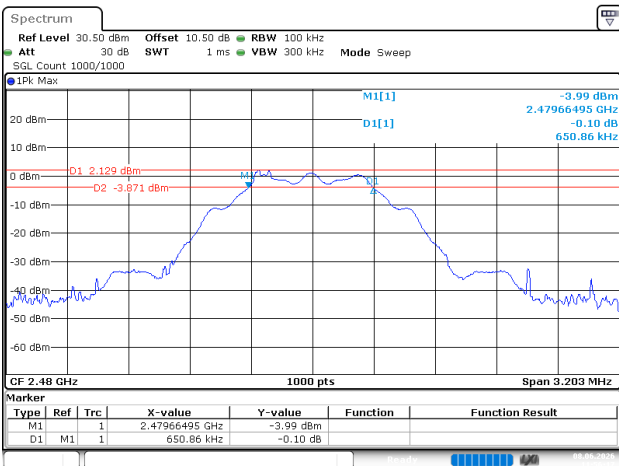


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 11:56:18

BLE_500kbps_Low_Channel

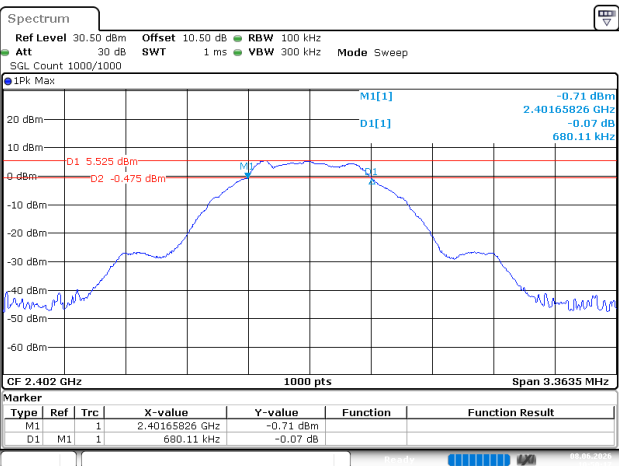


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 10:50:17

BLE_500kbps_Middle_Channel

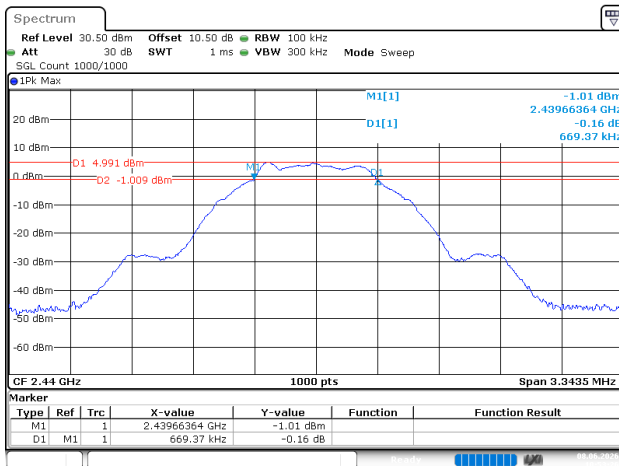

ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 10:53:27

BLE_500kbps_High_Channel

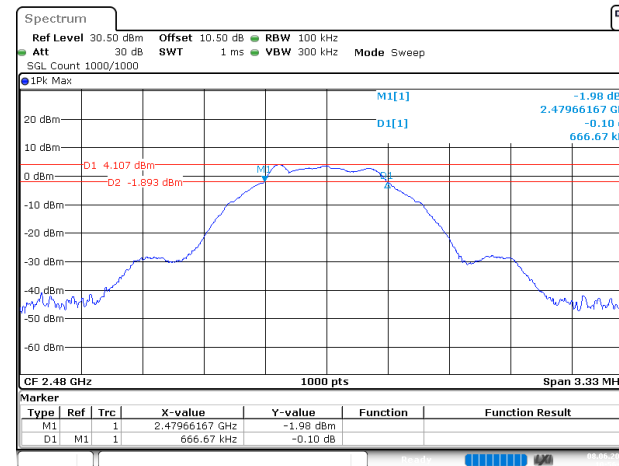

ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 10:56:39

99% Occupied Bandwidth**BLE 1M**

Channel	99% OBW (MHz)
BLE 1Mbps Low	1.028
BLE 1Mbps Middle	1.024
BLE 1Mbps High	1.016

BLE 2M

Channel	99% OBW (MHz)
BLE 2Mbps Low	2.046
BLE 2Mbps Middle	2.040
BLE 2Mbps High	2.046


BLE 125kbps

Channel	99% OBW (MHz)
BLE 125kbps Low	1.040
BLE 125kbps Middle	1.048
BLE 125kbps High	1.044

BLE 500kbps


Channel	99% OBW (MHz)
BLE 500kbps Low	1.016
BLE 500kbps Middle	1.016
BLE 500kbps High	1.012

BLE_1M_Low_Channel

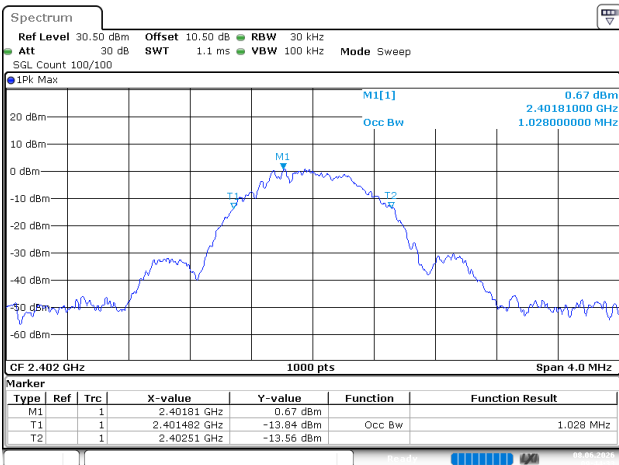


ProjectNo.:2601S56424E-RF Tester:Ethian Bu
 Date: 8 JUN.2026 09:44:34

BLE_1M_Middle_Channel

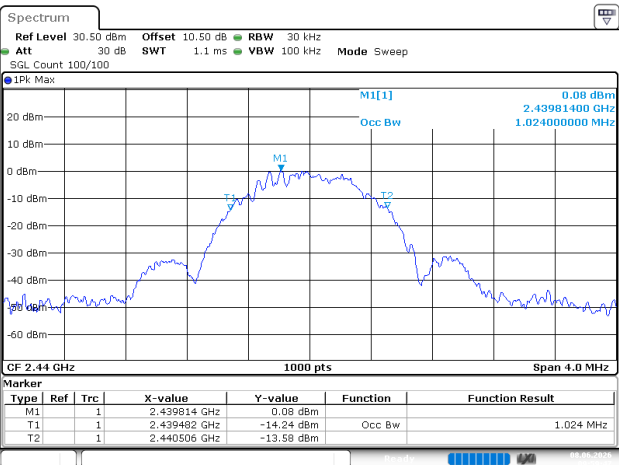


ProjectNo.:2601S56424E-RF Tester:Ethian Bu
 Date: 8 JUN.2026 09:59:47

BLE_1M_High_Channel

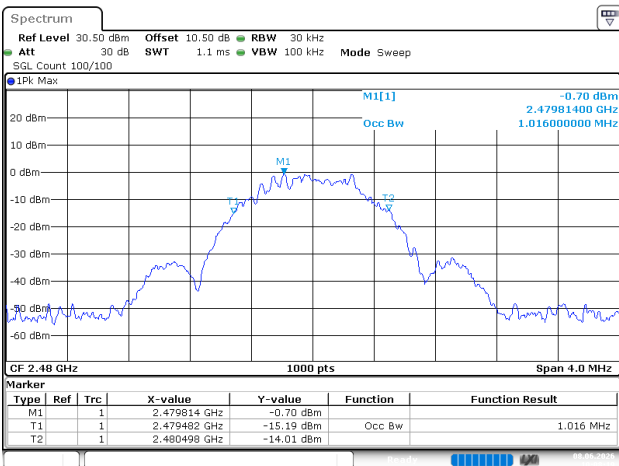


ProjectNo.:2601S56424E-RF Tester:Ethian Bu
 Date: 8 JUN.2026 10:08:19

BLE_2M_Low_Channel

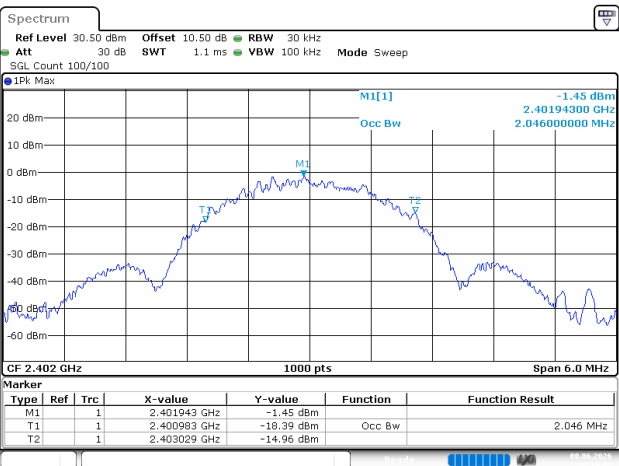


ProjectNo.:2601S56424E-RF Tester:Ethian Bu
 Date: 8 JUN.2026 10:14:07

BLE_2M_Middle_Channel

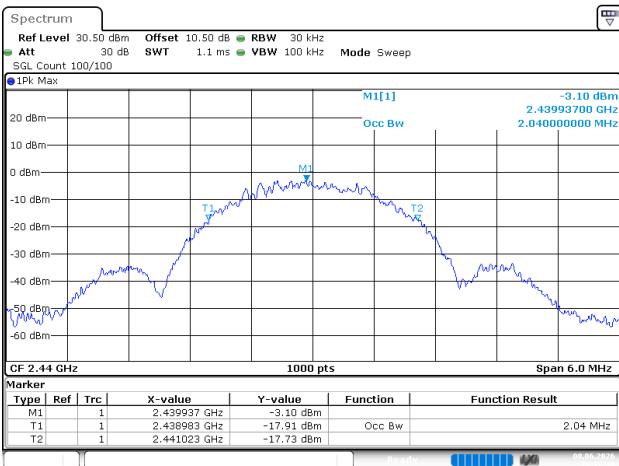


ProjectNo.:2601S56424E-RF Tester:Ethian Bu
 Date: 8 JUN.2026 10:17:10

BLE_2M_High_Channel

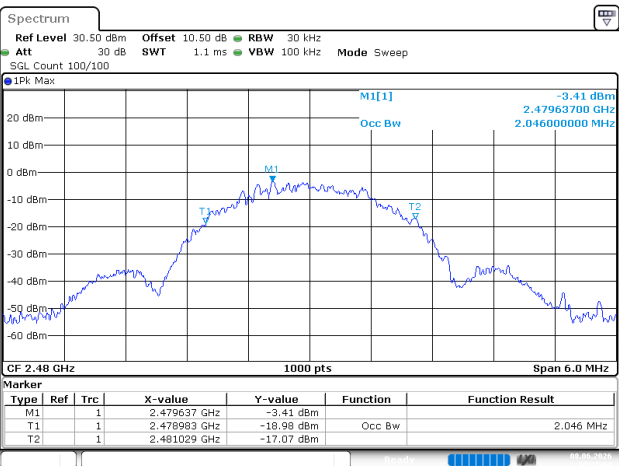


ProjectNo.:2601S56424E-RF Tester:Ethian Bu
 Date: 8 JUN.2026 10:21:04


BLE_125kbps_Low_Channel

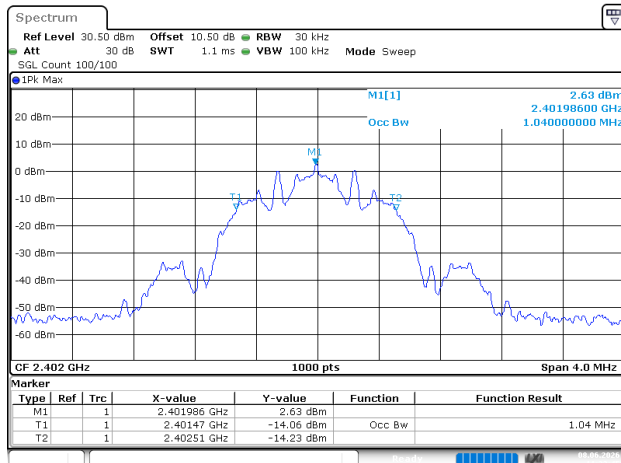


BLE_125kbps_Middle_Channel

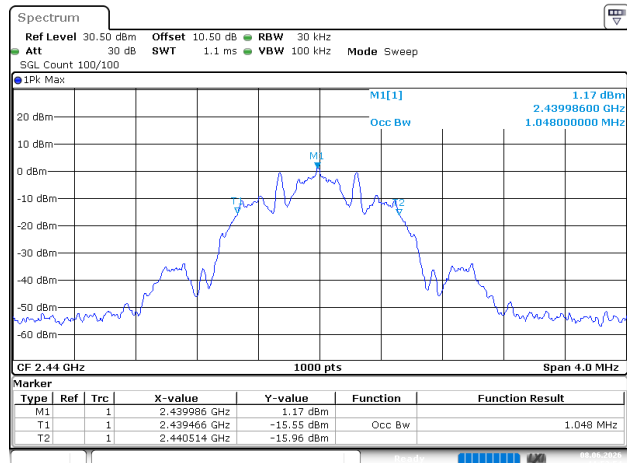


BLE_125kbps_High_Channel

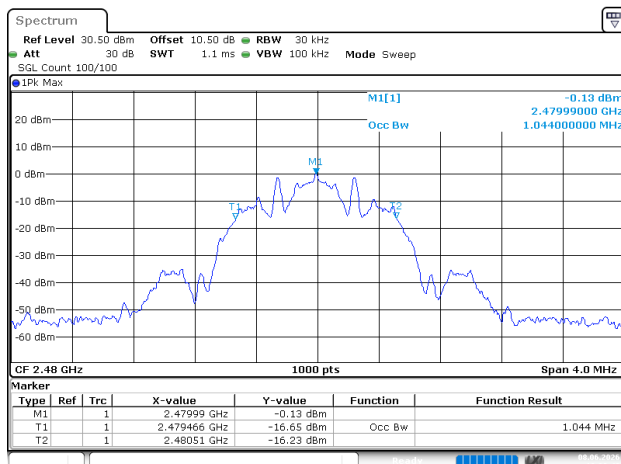


BLE_500kbps_Low_Channel

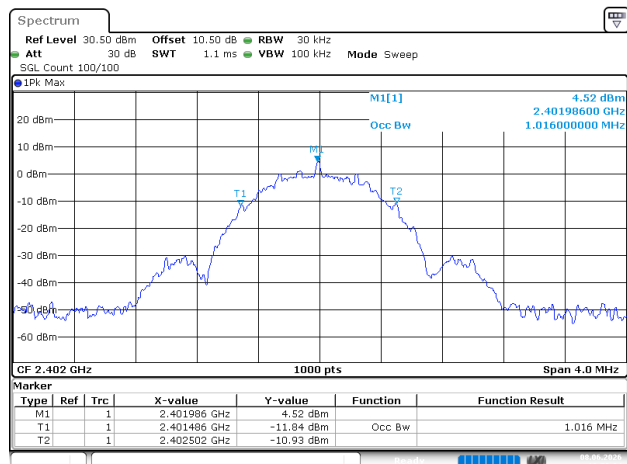

BLE_500kbps_Middle_Channel

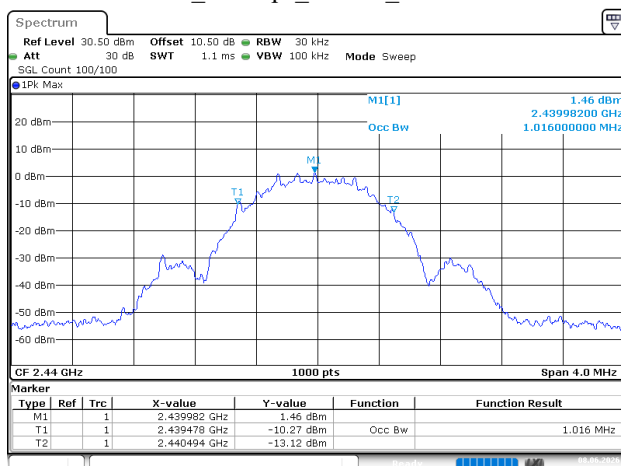

BLE_500kbps_High_Channel

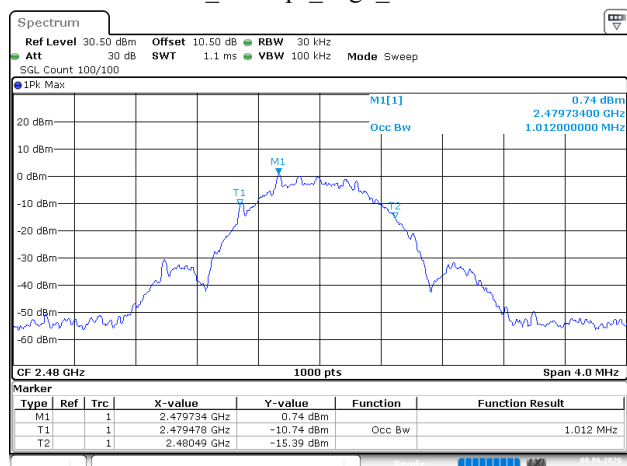

Maximum Conducted Output Power**BLE 1M**

Channel	Peak Output Power (dBm)	Limit (dBm)	Verdict
BLE 1Mbps Low	6.02	30.00	Pass
BLE 1Mbps Middle	5.29	30.00	Pass
BLE 1Mbps High	4.46	30.00	Pass

BLE 2M

Channel	Peak Output Power (dBm)	Limit (dBm)	Verdict
BLE 2Mbps Low	6.06	30.00	Pass
BLE 2Mbps Middle	5.32	30.00	Pass
BLE 2Mbps High	4.51	30.00	Pass


BLE 125kbps

Channel	Peak Output Power (dBm)	Limit (dBm)	Verdict
BLE 125kbps Low	6.14	30.00	Pass
BLE 125kbps Middle	5.37	30.00	Pass
BLE 125kbps High	4.46	30.00	Pass

BLE 500kbps


Channel	Peak Output Power (dBm)	Limit (dBm)	Verdict
BLE 500kbps Low	6.19	30.00	Pass
BLE 500kbps Middle	5.39	30.00	Pass
BLE 500kbps High	4.57	30.00	Pass

BLE_1M_Low_Channel

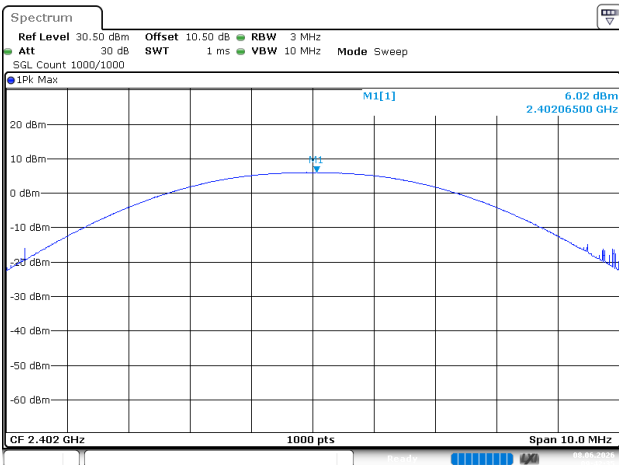


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8 JUN,2026 09:42:35

BLE_1M_Middle_Channel

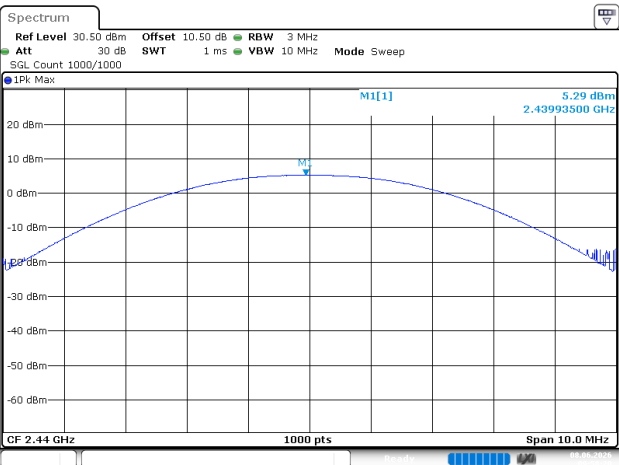


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8 JUN,2026 09:58:20

BLE_1M_High_Channel

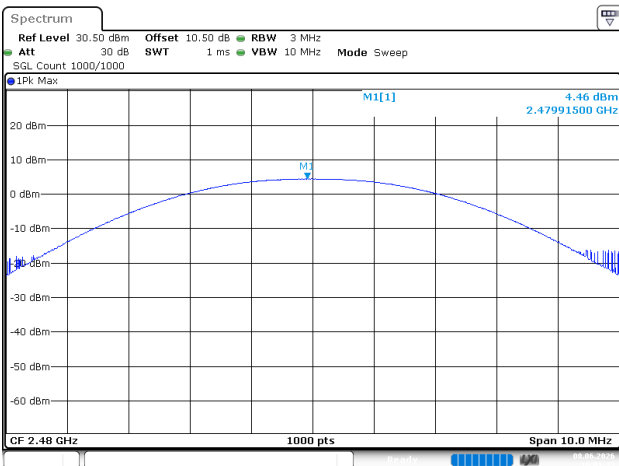


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8 JUN,2026 10:01:33

BLE_2M_Low_Channel

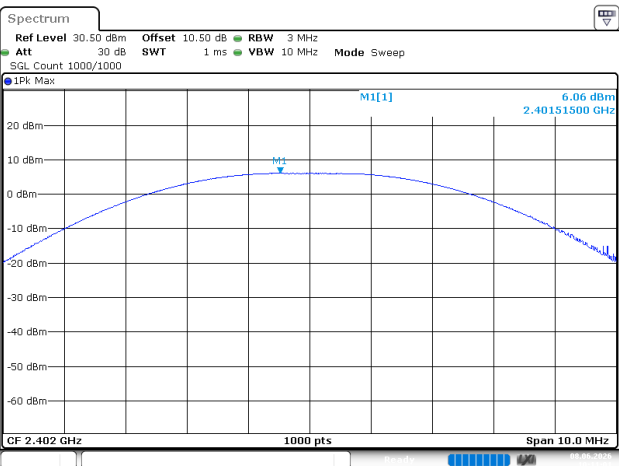


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8 JUN,2026 10:11:01

BLE_2M_Middle_Channel

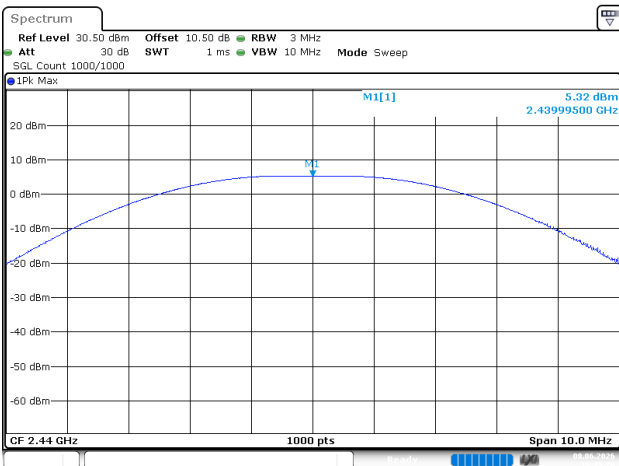


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8 JUN,2026 10:15:26

BLE_2M_High_Channel

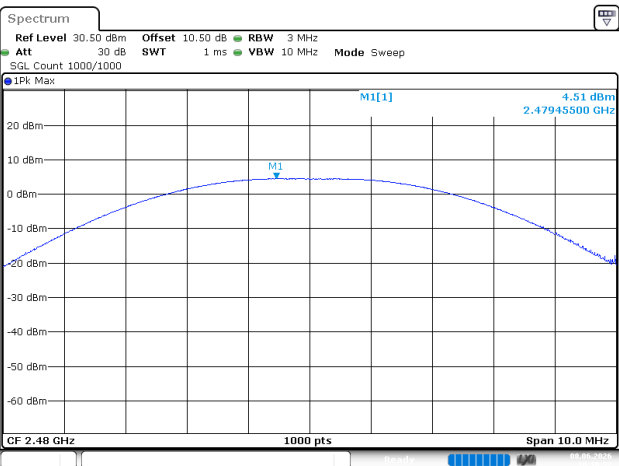


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8 JUN,2026 10:18:52

BLE_125kbps_Low_Channel

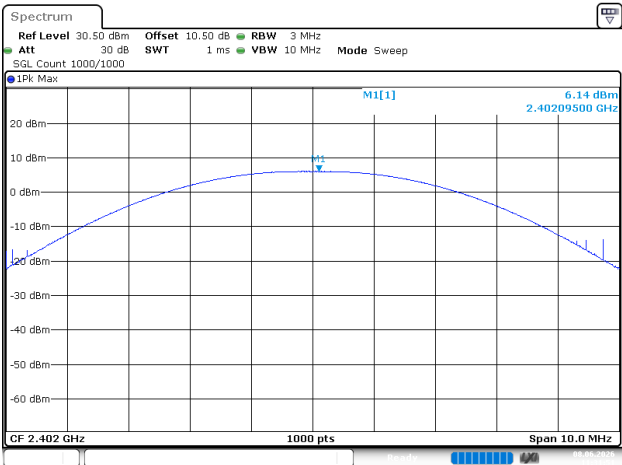


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 11:31:51

BLE_125kbps_Middle_Channel

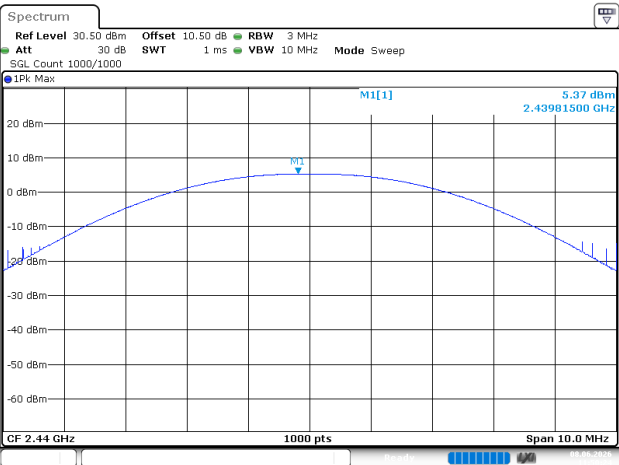


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 11:50:24

BLE_125kbps_High_Channel

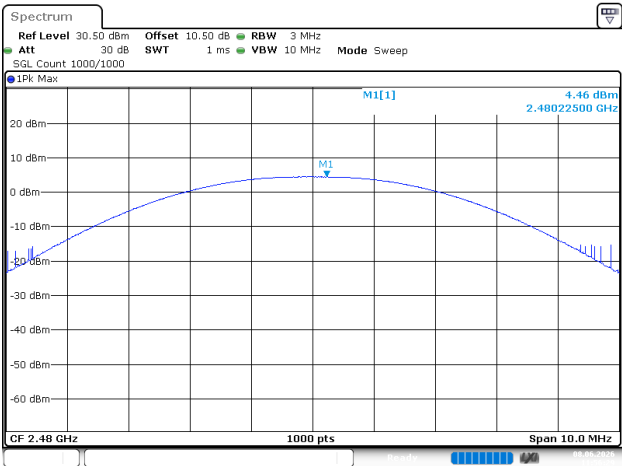


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 11:56:29

BLE_500kbps_Low_Channel

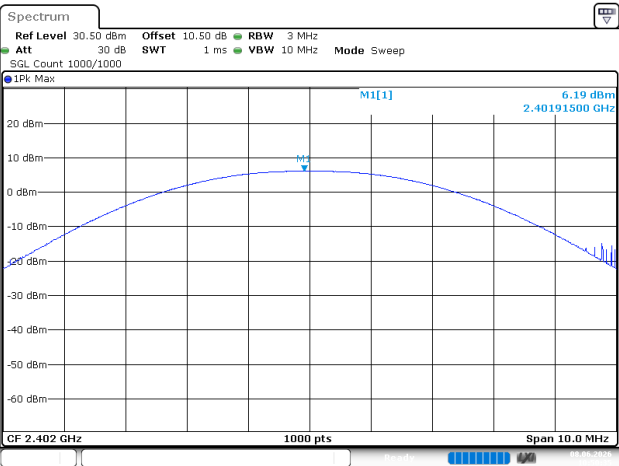


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 10:50:35

BLE_500kbps_Middle_Channel

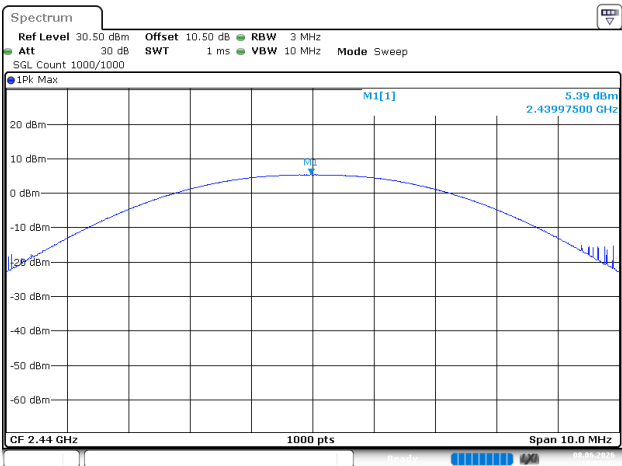

ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 10:53:40

BLE_500kbps_High_Channel

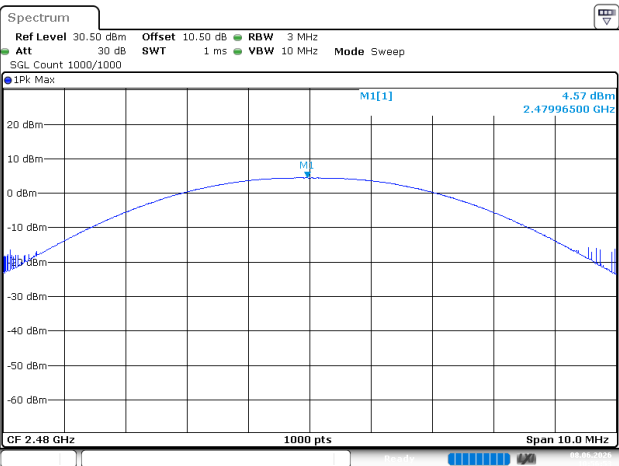

ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 10:56:54

Power Spectral Density**BLE 1M**

Channel	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
BLE 1Mbps Low	-10.91	8	Pass
BLE 1Mbps Middle	-11.65	8	Pass
BLE 1Mbps High	-12.49	8	Pass

BLE 2M

Channel	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
BLE 2Mbps Low	-13.47	8	Pass
BLE 2Mbps Middle	-14.22	8	Pass
BLE 2Mbps High	-15.02	8	Pass


BLE 125kbps

Channel	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
BLE 125kbps Low	-0.29	8	Pass
BLE 125kbps Middle	-1.02	8	Pass
BLE 125kbps High	-1.86	8	Pass

BLE 500kbps


Channel	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
BLE 500kbps Low	-0.45	8	Pass
BLE 500kbps Middle	-1.26	8	Pass
BLE 500kbps High	-2.09	8	Pass

BLE_1M_Low_Channel

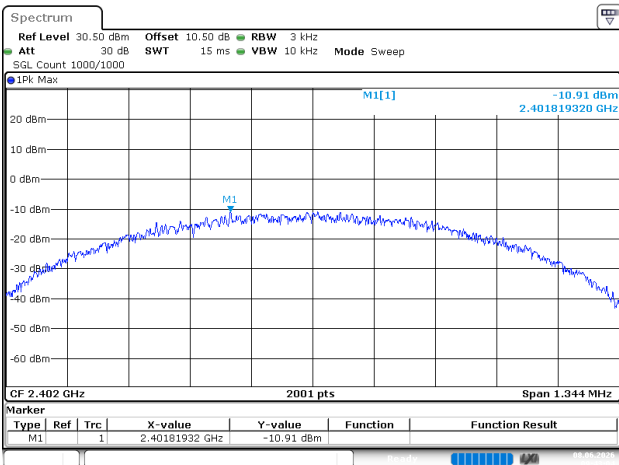


ProjectNo.:2601S56424E-RF Tester:Bthau Bu
Date: 8 JUN 2026 09:43:04

BLE_1M_Middle_Channel

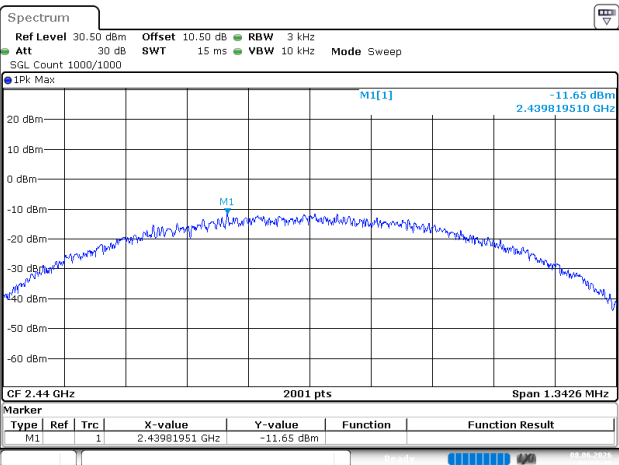


ProjectNo.:2601S56424E-RF Tester:Bthau Bu
Date: 8 JUN 2026 09:58:48

BLE_1M_High_Channel

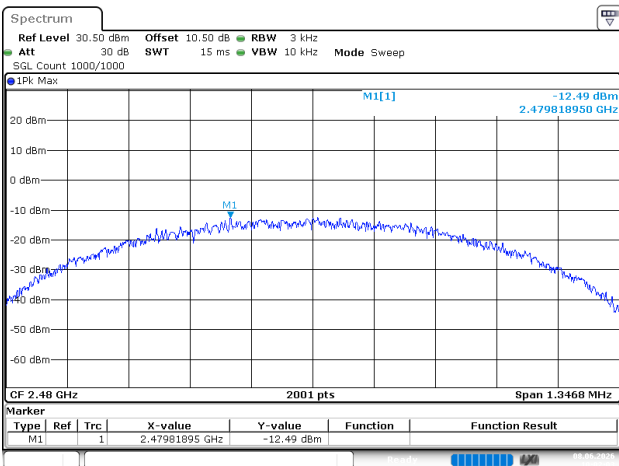


ProjectNo.:2601S56424E-RF Tester:Bthau Bu
Date: 8 JUN 2026 10:02:04

BLE_2M_Low_Channel

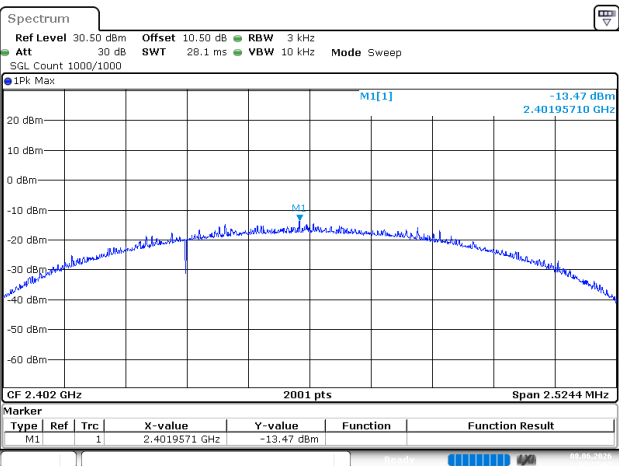


ProjectNo.:2601S56424E-RF Tester:Bthau Bu
Date: 8 JUN 2026 10:12:08

BLE_2M_Middle_Channel

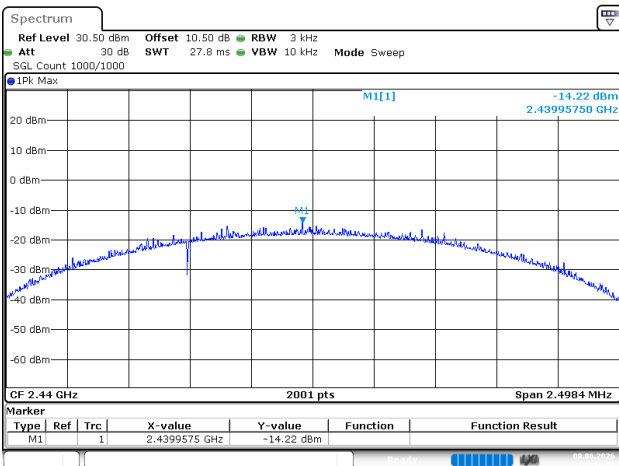


ProjectNo.:2601S56424E-RF Tester:Bthau Bu
Date: 8 JUN 2026 10:16:10

BLE_2M_High_Channel

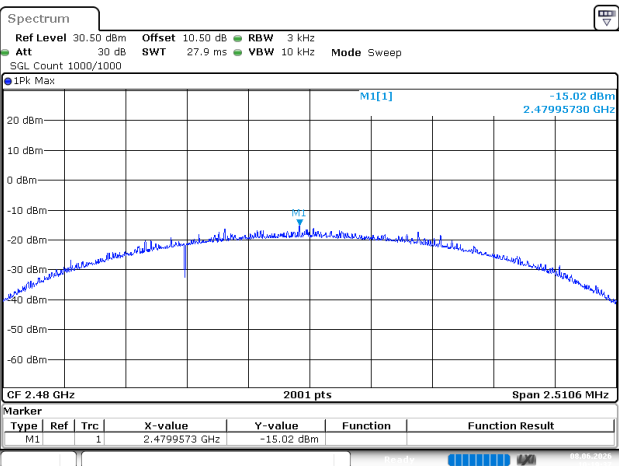


ProjectNo.:2601S56424E-RF Tester:Bthau Bu
Date: 8 JUN 2026 10:19:38


BLE_125kbps_Low_Channel

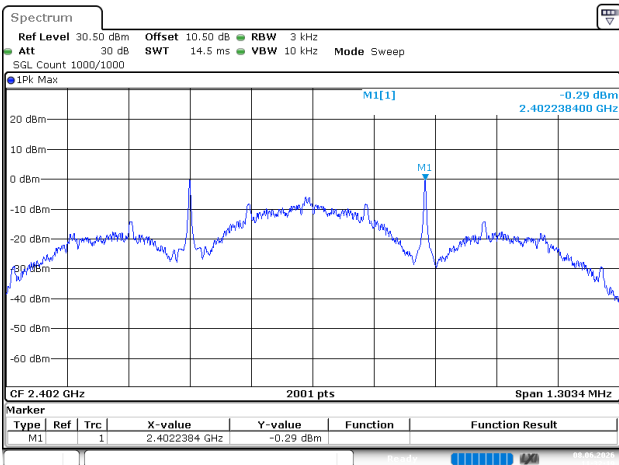


BLE_125kbps_Middle_Channel

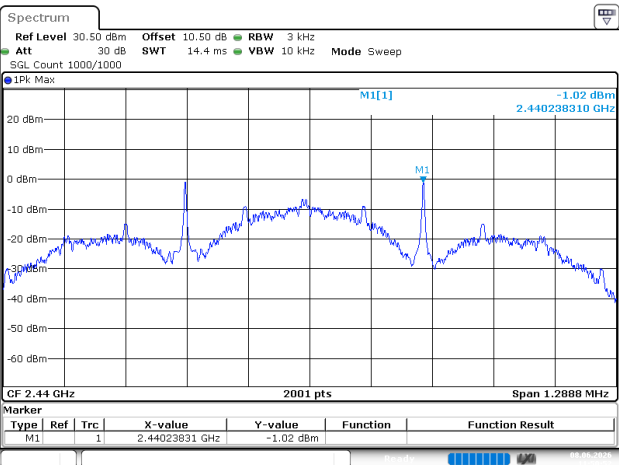


BLE_125kbps_High_Channel

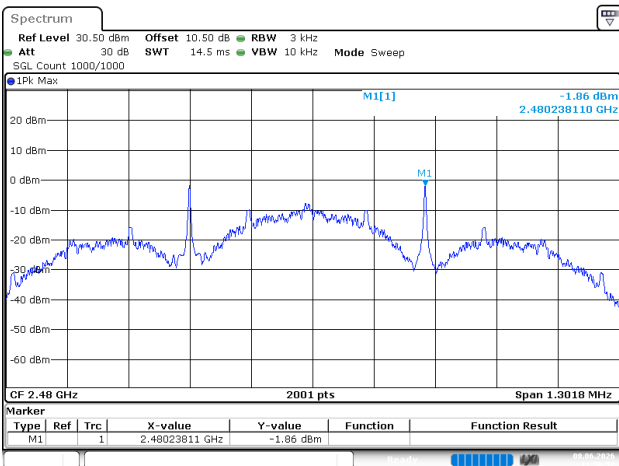


BLE_500kbps_Low_Channel

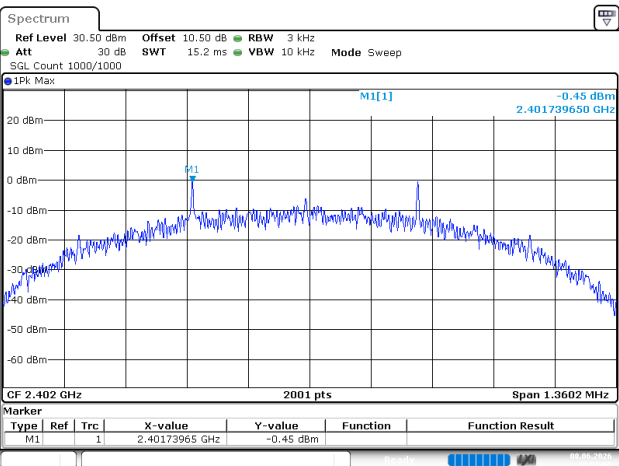

BLE_500kbps_Middle_Channel

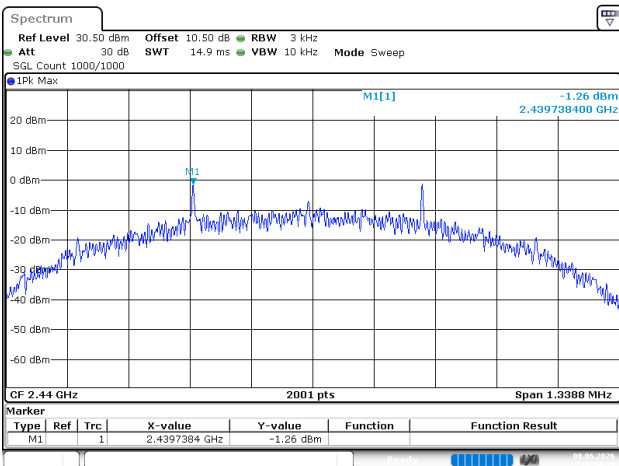


BLE_500kbps_High_Channel

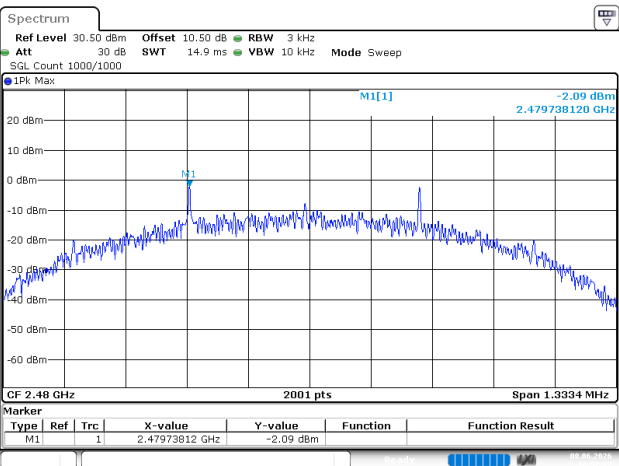


100 kHz Bandwidth of Frequency Band Edge

BLE_1M_Low_Channel

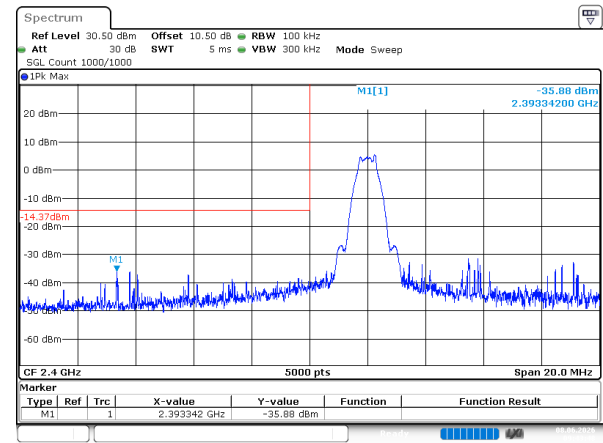


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 09:43:48

BLE_1M_High_Channel

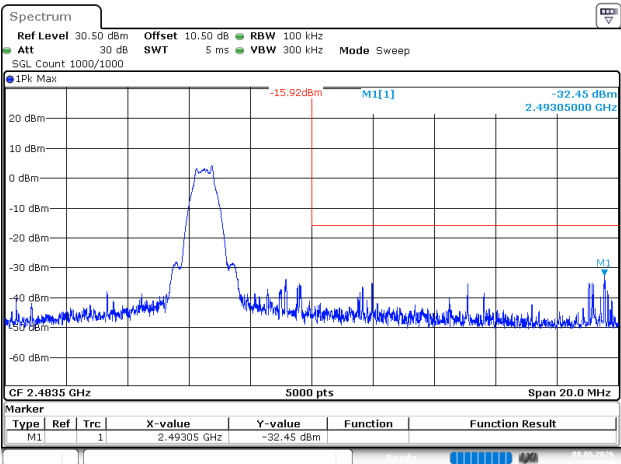


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 10:02:44

BLE_2M_Low_Channel

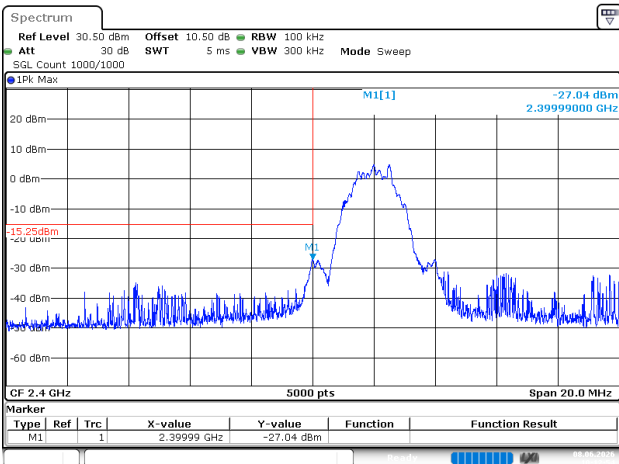


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 10:12:54

BLE_2M_High_Channel

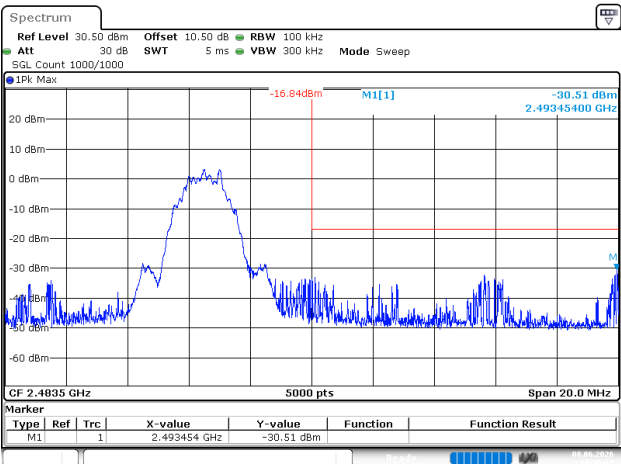


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 10:20:17

BLE_125kbps_Low_Channel

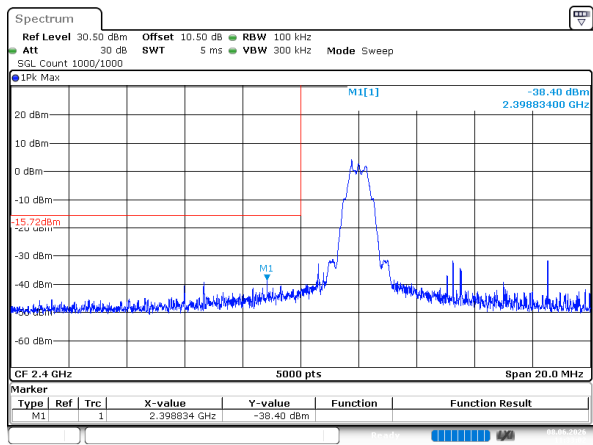


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 11:33:03

BLE_125kbps_High_Channel

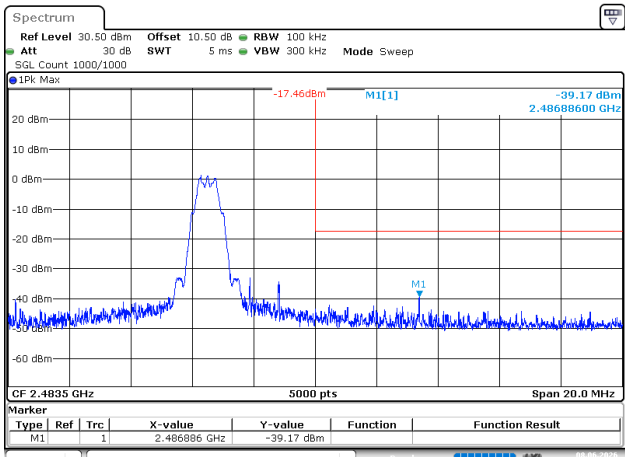


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 11:57:37

BLE_500kbps_Low_Channel

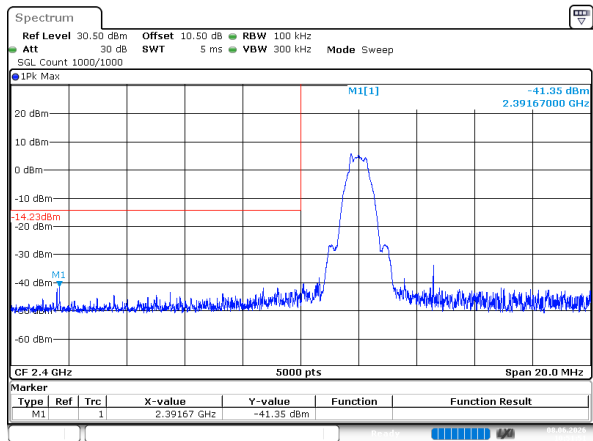

ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 10:51:51


BLE_500kbps_High_Channel

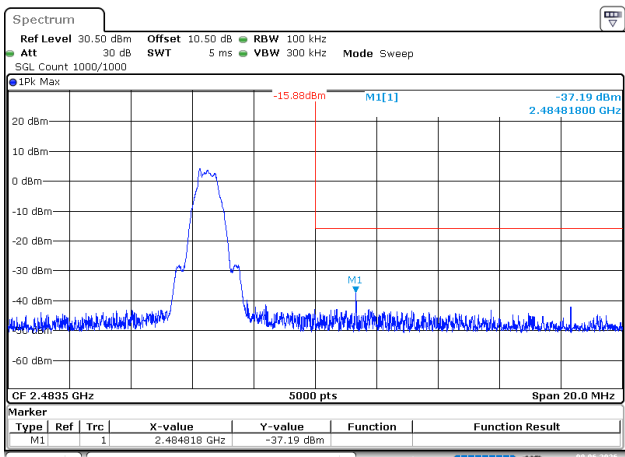

ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 10:58:03


Conducted Spurious Emission

BLE_1M_Low_Channel

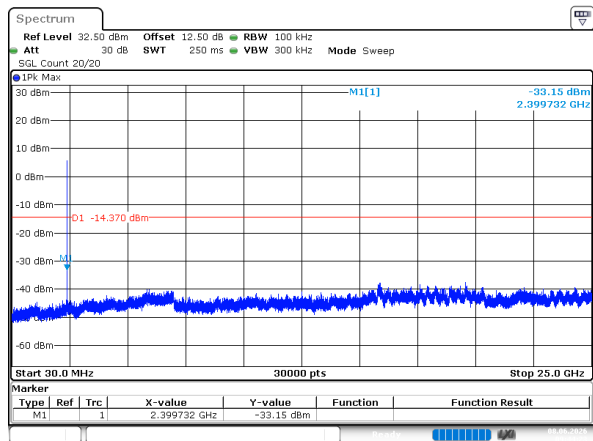


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 09:44:23

BLE_1M_Middle_Channel

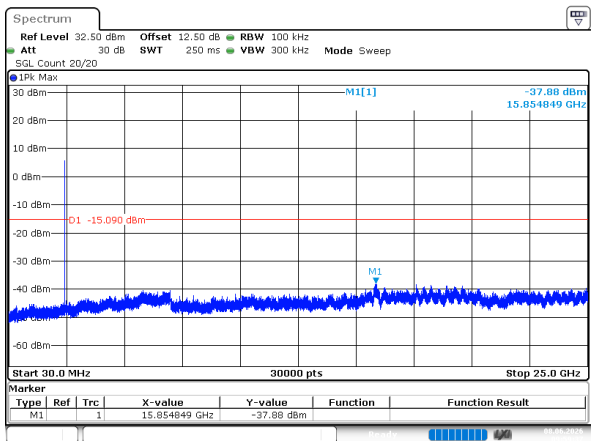


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 09:59:38

BLE_1M_High_Channel

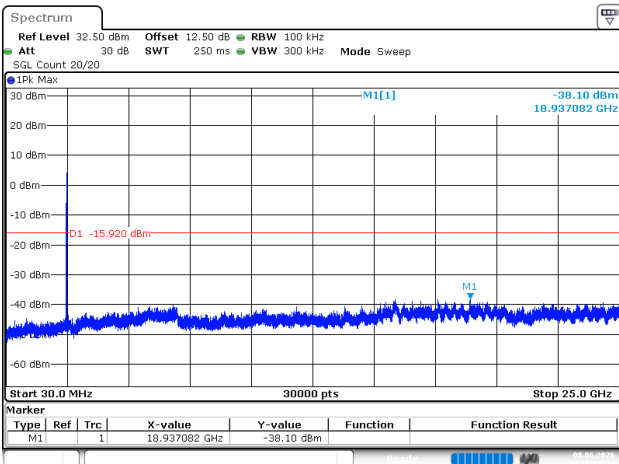


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 10:08:10

BLE_2M_Low_Channel

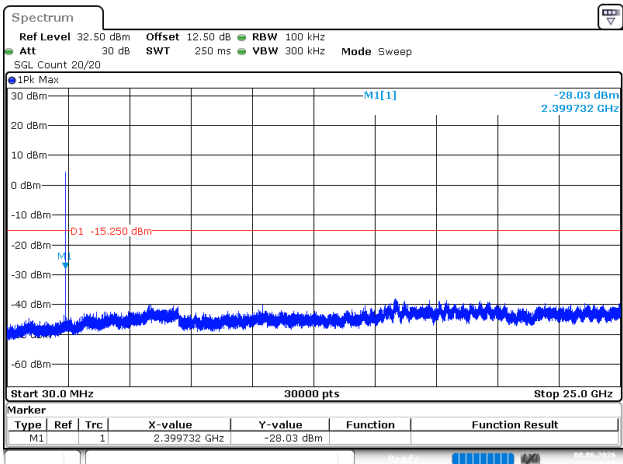


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 10:13:58

BLE_2M_Middle_Channel

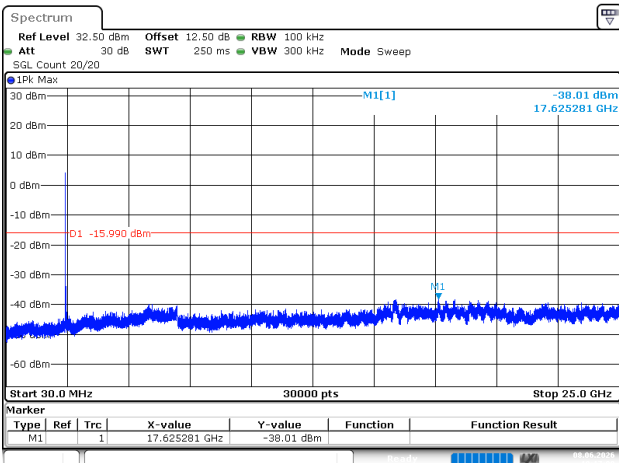


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 10:17:00

BLE_2M_High_Channel

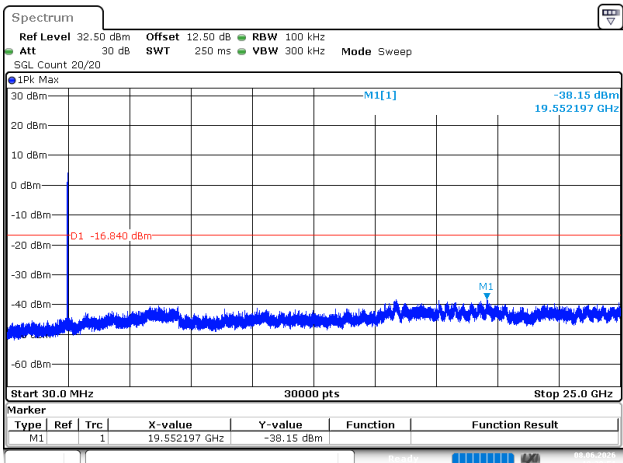


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 10:20:51

BLE_125kbps_Low_Channel

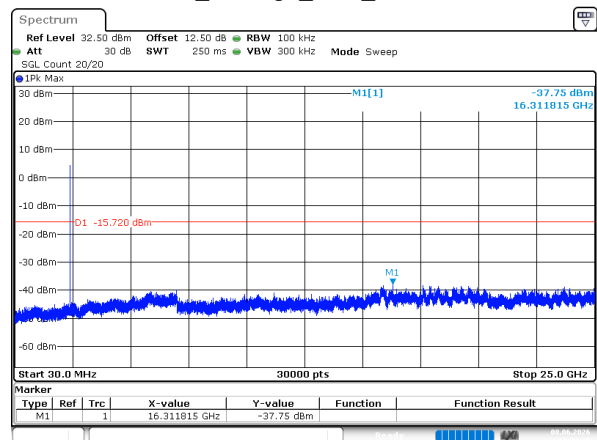


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 11:33:36

BLE_125kbps_Middle_Channel

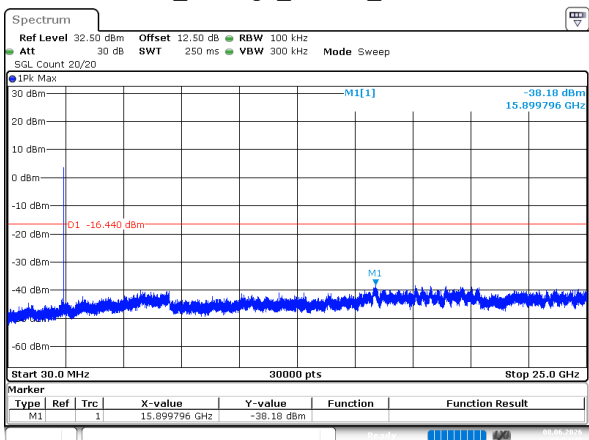


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 11:52:45

BLE_125kbps_High_Channel

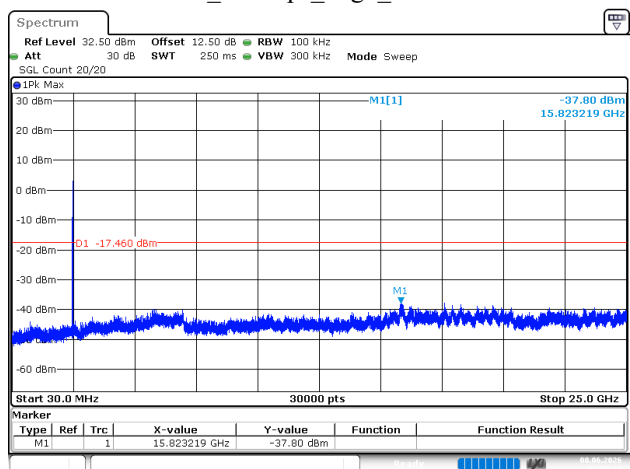


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 13:00:34

BLE_500kbps_Low_Channel

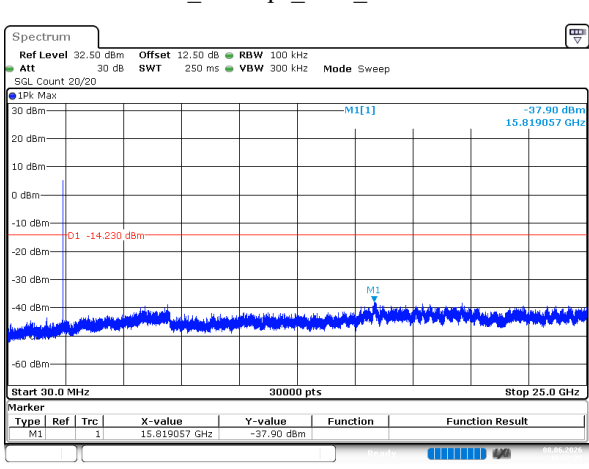


ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 10:52:25

BLE_500kbps_Middle_Channel

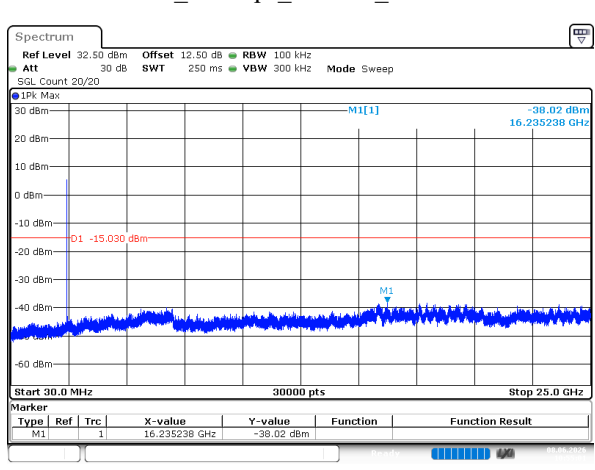

ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 10:55:01

BLE_500kbps_High_Channel

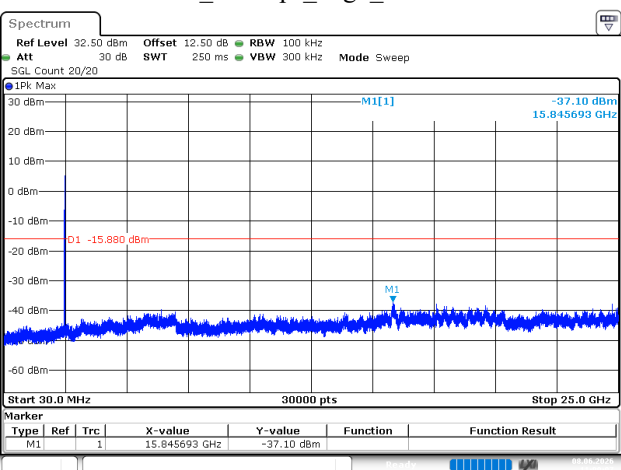

ProjectNo.:2601S56424E-RF Tester:Ethan Bu
Date: 8.JUN.2026 11:00:07

Duty Cycle**BLE 1M**

Channel	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
BLE 1Mbps Middle	2.130	2.501	85.17	0.70	469	0.500

BLE 2M

Channel	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
BLE 2Mbps Middle	1.064	1.875	56.75	2.46	940	1


BLE 125kbps

Channel	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
BLE 125kbps Middle	17.031	17.504	97.30	0.12	59	0.1


BLE 500kbps

Channel	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
BLE 500kbps Middle	4.551	5.001	91.00	0.41	220	0.3


BLE_1M_Middle_Channel

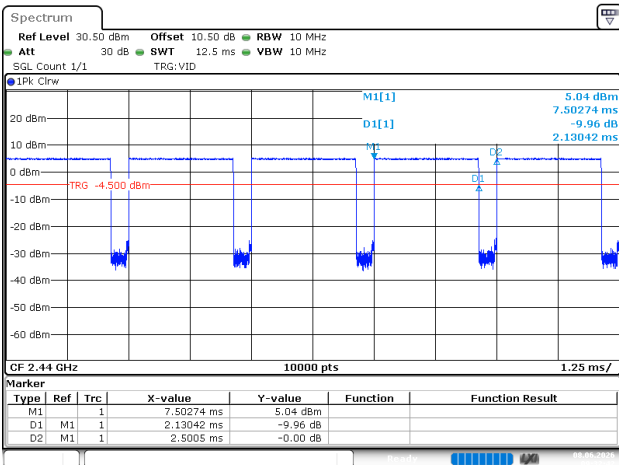


BLE_2M_Middle_Channel

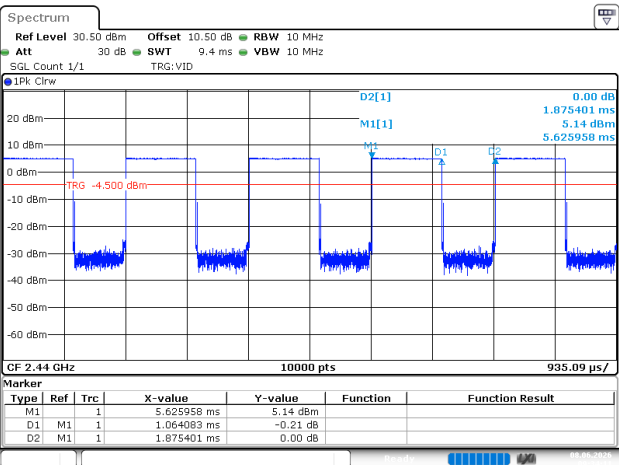

BLE_125kbps_Middle_Channel

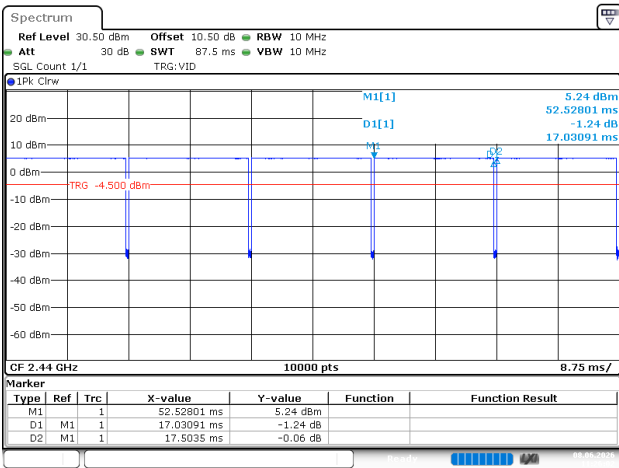

BLE_500kbps_Middle_Channel

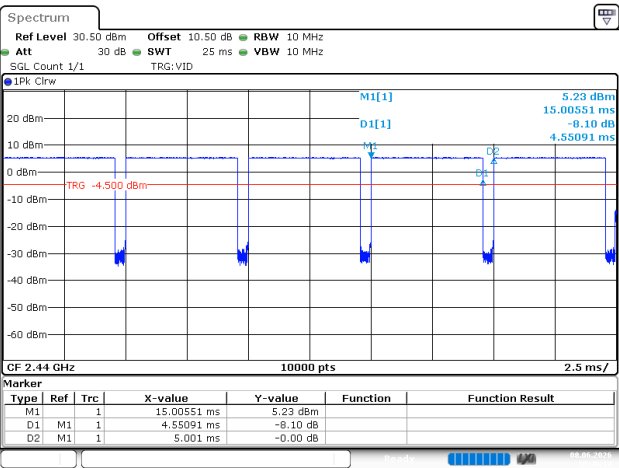

EUT PHOTOGRAPHS

Please refer to the attachment 2601S56424E-RF-EXP External photo and 2601S56424E-RF-INP Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2601S56424E-RF-00B-TSP Test Setup photo.

***** END OF REPORT *****