Mode	28	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_52/38 RU_5300MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	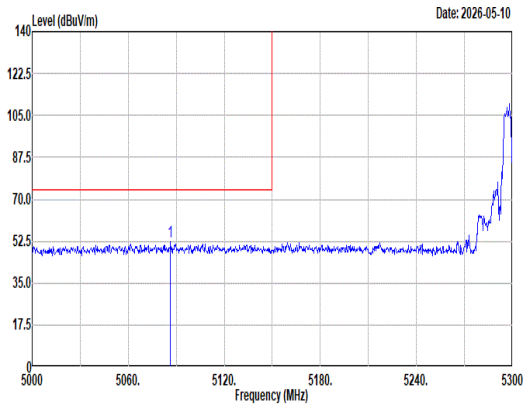 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5086.40 52.19 74.00 -21.81 42.47 33.28 10.09 33.65 0.00 400 175 Peak	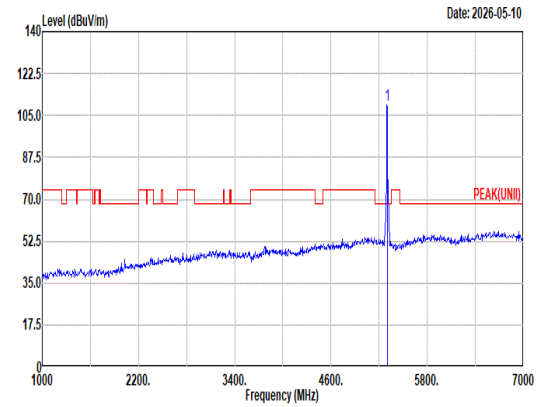 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 109.55 ------ ------ 99.74 33.12 10.29 33.60 0.00 400 175 Peak
Avg	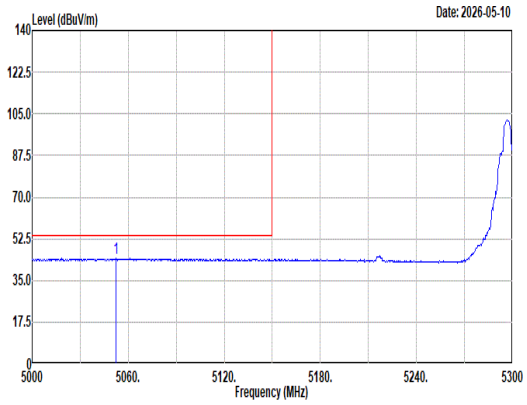 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5052.20 44.17 54.00 -9.83 34.29 33.49 10.05 33.66 0.00 400 175 Average	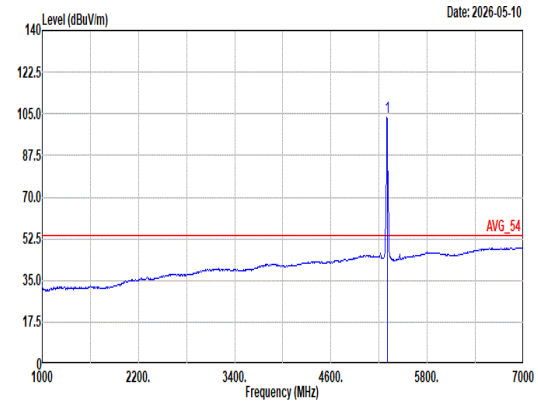 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 103.70 ------ ------ 93.89 33.12 10.29 33.60 0.00 400 175 Average

Mode	28	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_52/38 RU_5300MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	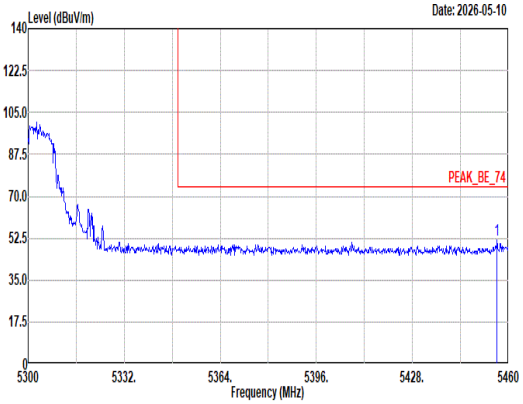 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5456.16 51.69 74.00 -22.31 41.60 33.20 10.46 33.57 0.00 400 175 Peak	Blank
Avg	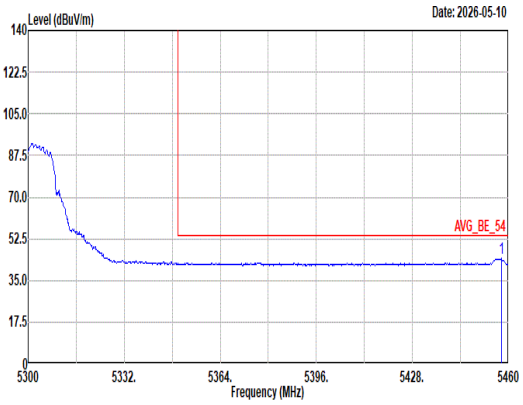 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.76 44.31 54.00 -9.69 34.22 33.20 10.46 33.57 0.00 400 175 Average	Blank

Mode	28	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_52/38 RU_5300MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	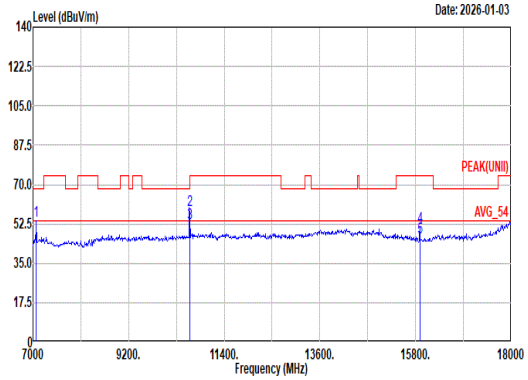 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7067.00 53.65 68.20 -14.55 59.51 36.51 13.14 56.36 0.85 -- -- Peak 2 10600.00 58.51 74.00 -15.49 58.73 39.20 16.07 55.67 0.18 154 173 Peak 3 10600.00 52.97 54.00 -1.03 53.19 39.20 16.07 55.67 0.18 154 173 Average 4 15900.00 51.46 74.00 -22.54 49.19 38.10 19.26 55.19 0.10 217 177 Peak 5 15900.00 46.64 54.00 -7.36 44.37 38.10 19.26 55.19 0.10 217 177 Average	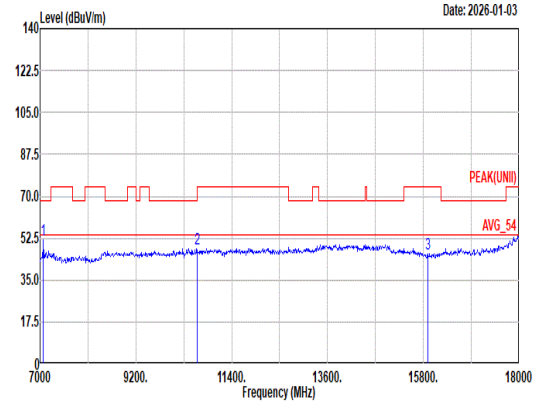 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7067.00 51.95 68.20 -16.25 57.81 36.51 13.14 56.36 0.85 -- -- Peak 2 10600.00 47.83 74.00 -26.17 48.05 39.20 16.07 55.67 0.18 -- -- Peak 3 15900.00 45.92 74.00 -28.08 43.65 38.10 19.26 55.19 0.10 -- -- Peak

Mode	28	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_52/38 RU_5300MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	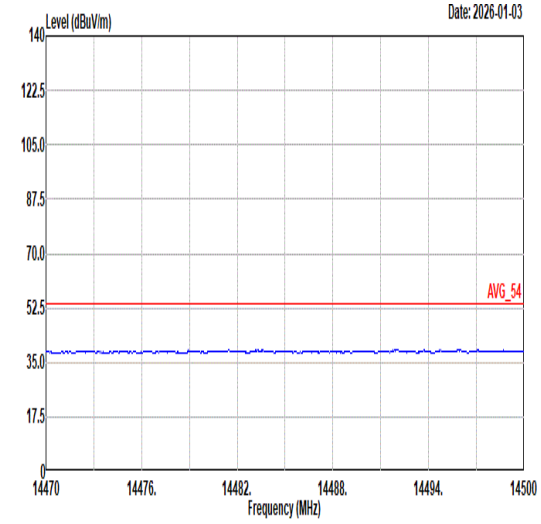 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	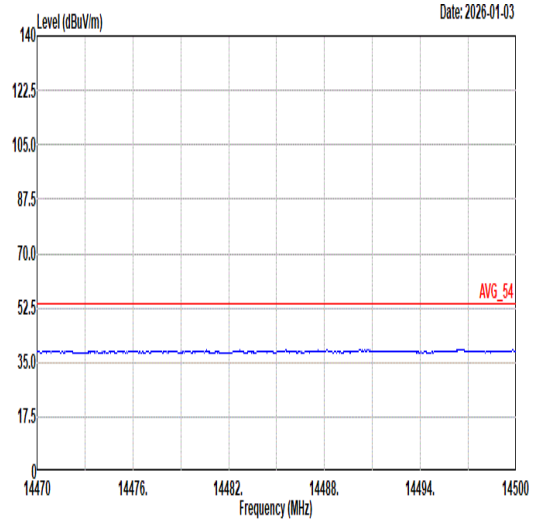 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	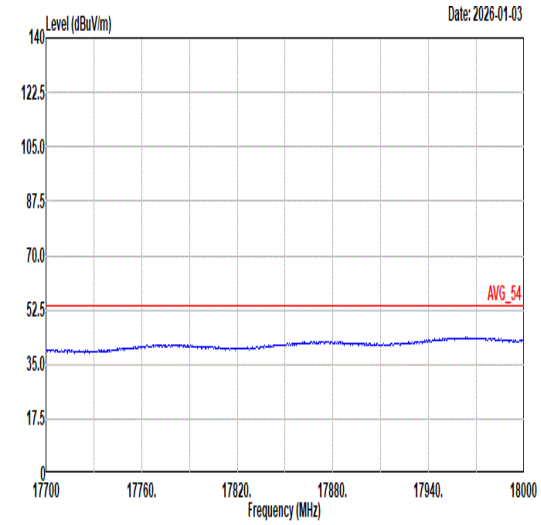 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	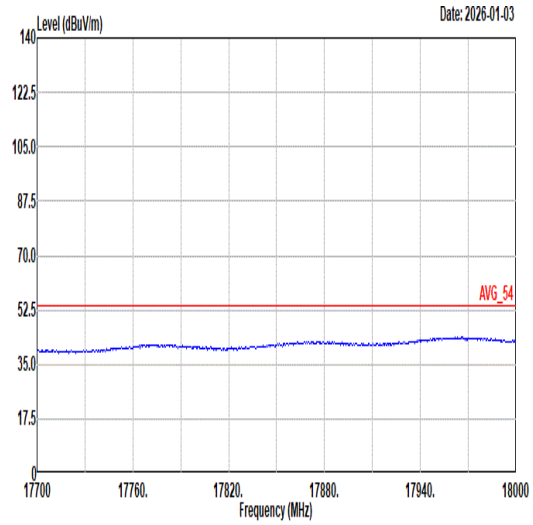 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	29	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_52/40 RU_5320MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	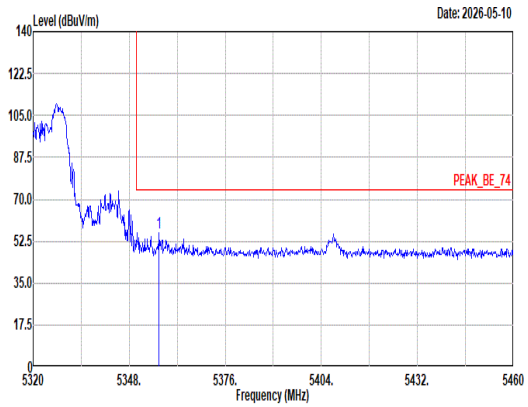 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5356.68 56.00 74.00 -18.00 46.14 33.11 10.34 33.59 0.00 100 224 Peak	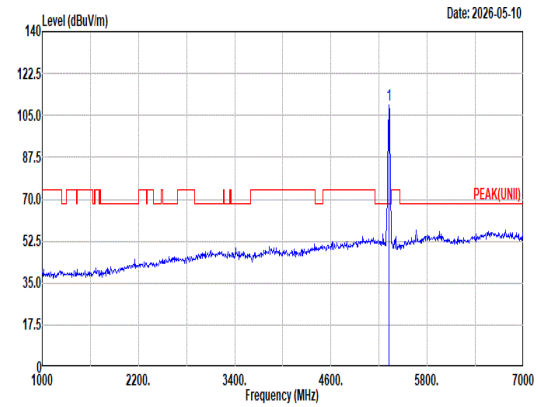 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 109.32 ------ ------ 99.51 33.10 10.31 33.60 0.00 100 224 Peak
Avg	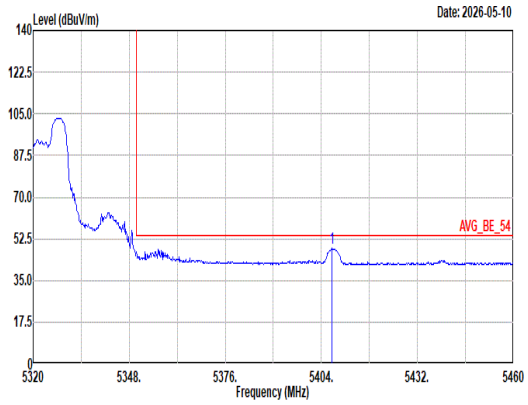 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5407.08 48.35 54.00 -5.65 38.35 33.20 10.38 33.58 0.00 100 224 Average	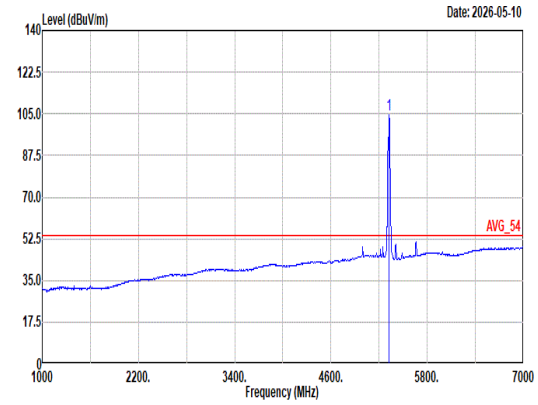 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 104.86 ------ ------ 95.05 33.10 10.31 33.60 0.00 100 224 Average

Mode	29	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_52/40 RU_5320MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	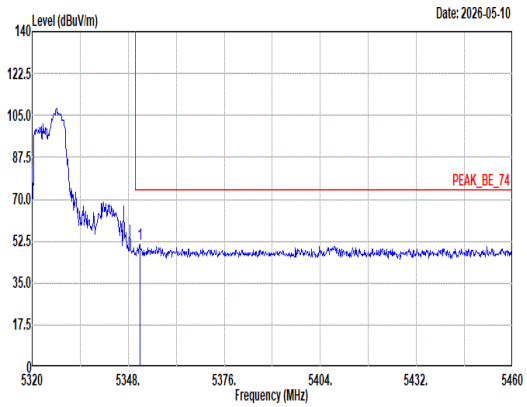 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.36 51.14 74.00 -22.86 41.30 33.10 10.33 33.59 0.00 400 174 Peak	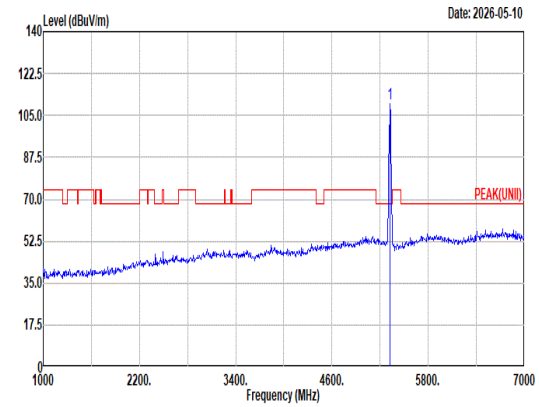 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 109.83 ------ ------ 100.02 33.10 10.31 33.60 0.00 400 174 Peak
Avg	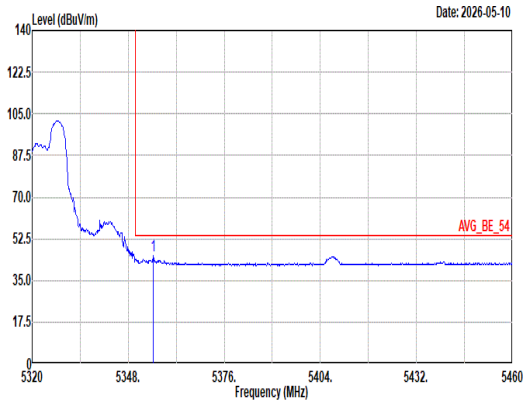 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5355.28 45.23 54.00 -8.77 35.38 33.11 10.33 33.59 0.00 400 174 Average	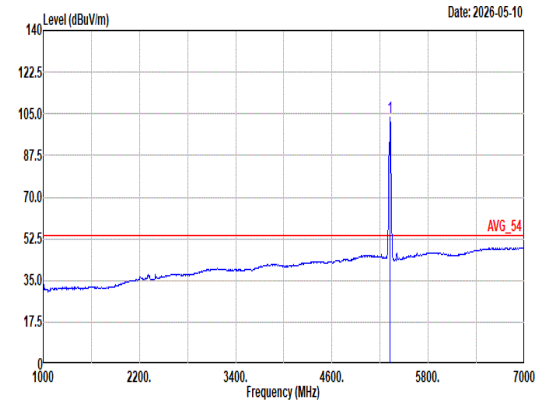 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 103.50 ------ ------ 93.69 33.10 10.31 33.60 0.00 400 174 Average

Mode	29	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_52/40 RU_5320MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	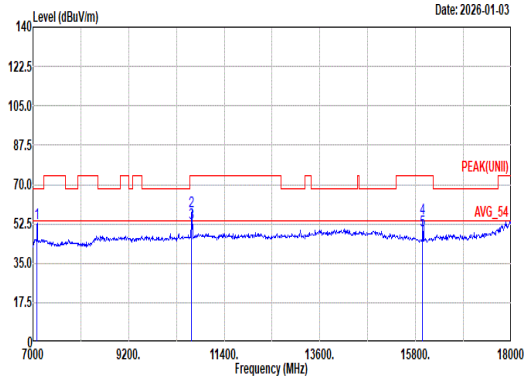 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL 		Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
---	---	---	---	---	---	---	---	---	---	---	---	---
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	7093.00	52.96	68.20	-15.24	58.75	36.60	13.16	56.37	0.82	--	--	Peak
2	10640.00	57.91	74.00	-16.09	58.04	39.20	16.11	55.62	0.18	144	172	Peak
3	10640.00	52.99	54.00	-1.01	53.12	39.20	16.11	55.62	0.18	144	172	Average
4	15960.00	55.02	74.00	-18.98	52.69	38.13	19.26	55.16	0.10	213	182	Peak
5	15960.00	49.65	54.00	-4.35	47.32	38.13	19.26	55.16	0.10	213	182	Average | |	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
---	---	---	---	---	---	---	---	---	---	---	---	---
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	7093.00	50.63	68.20	-17.57	56.42	36.60	13.16	56.37	0.82	--	--	Peak
2	10640.00	47.64	74.00	-26.36	47.77	39.20	16.11	55.62	0.18	--	--	Peak
3	15960.00	44.86	74.00	-29.14	42.49	38.18	19.26	55.17	0.10	--	--	Peak	 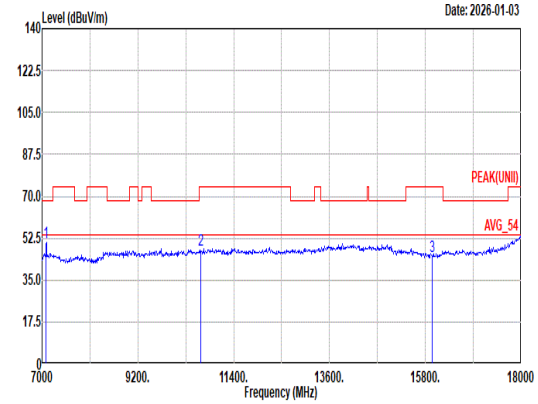 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL	

Mode	29	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_52/40 RU_5320MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	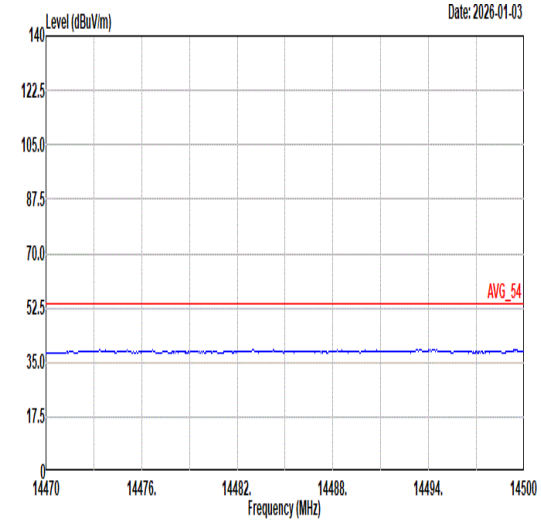 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	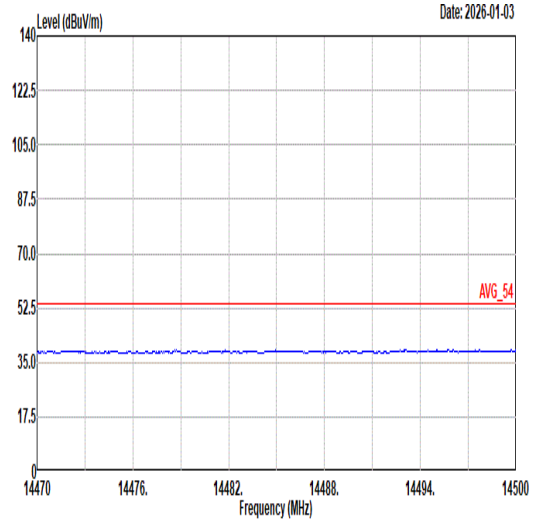 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	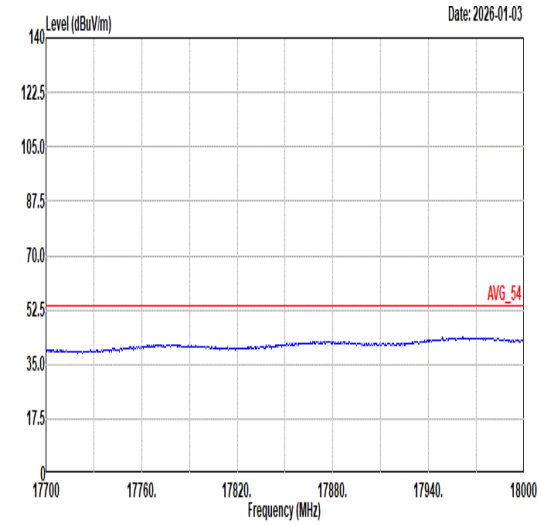 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	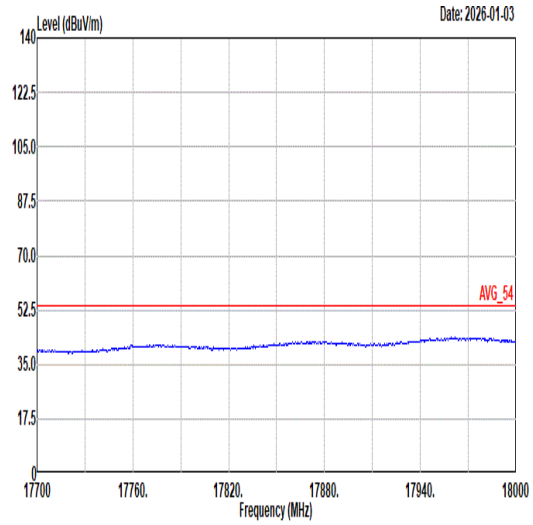 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	30	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_106/53 RU_5260MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	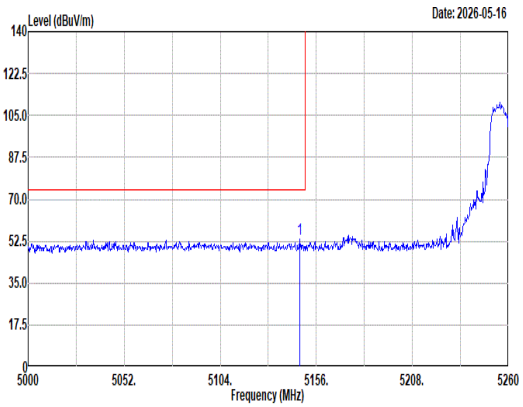 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5147.16 53.21 74.00 -20.79 43.41 33.29 10.15 33.64 0.00 101 64 Peak	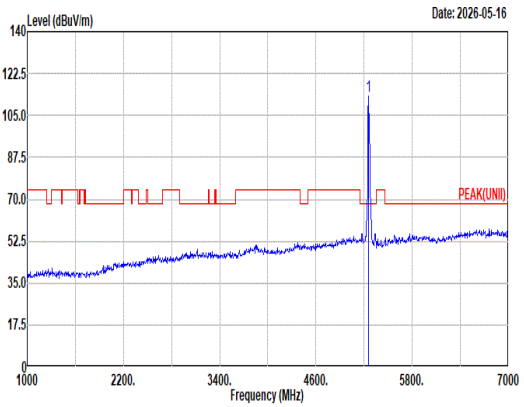 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5260.00 112.82 ------ ------ 102.90 33.28 10.25 33.61 0.00 101 64 Peak
Avg	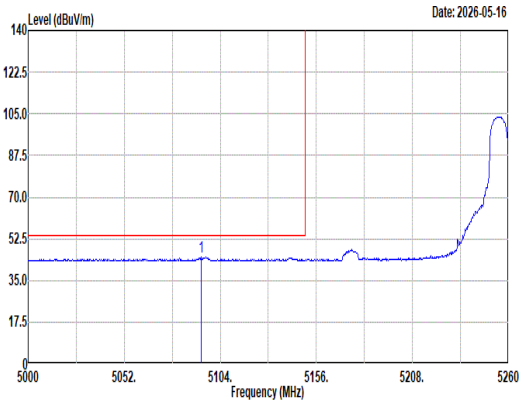 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto 1 5093.86 44.69 54.00 -9.31 35.00 33.24 10.10 33.65 0.00 101 64 Average	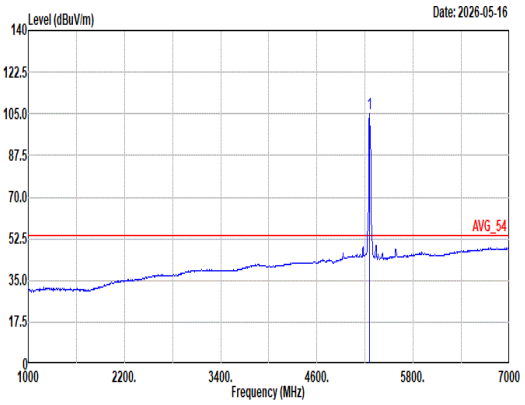 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto 1 5260.00 105.16 ------ ------ 95.24 33.28 10.25 33.61 0.00 101 64 Average

Mode	30	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_106/53 RU_5260MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	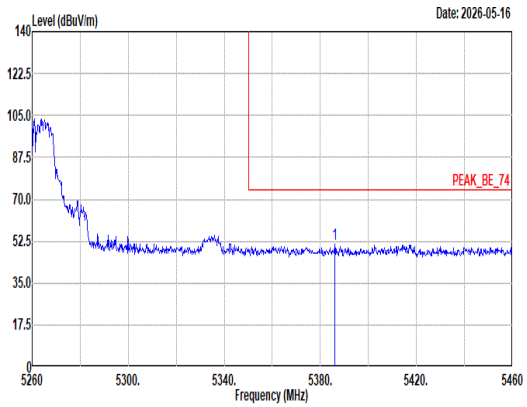 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5386.00 51.44 74.00 -22.56 41.50 33.17 10.36 33.59 0.00 101 64 Peak	Blank
Avg	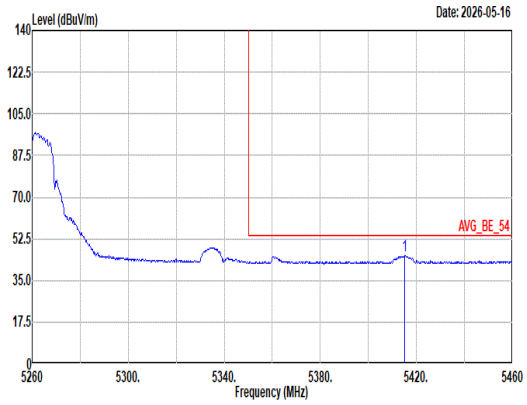 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5415.20 45.26 54.00 -8.74 35.25 33.20 10.39 33.58 0.00 101 64 Average	Blank

Mode	30	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_106/53 RU_5260MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	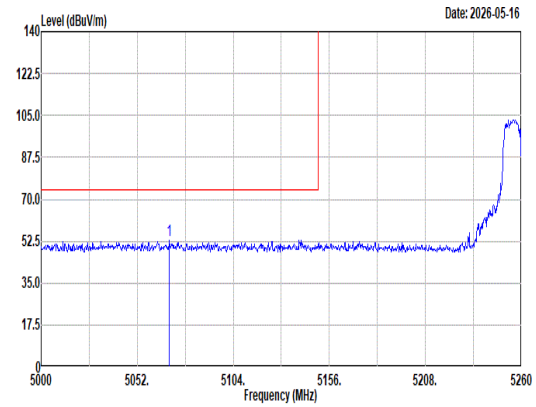 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5069.42 52.72 74.00 -21.28 42.92 33.38 10.07 33.65 0.00 388 0 Peak	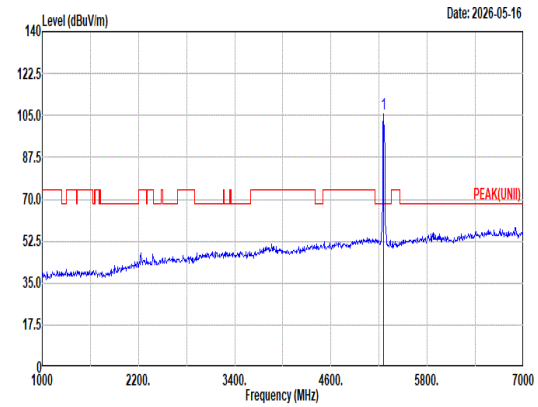 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5260.00 105.46 ------ ------ 95.54 33.28 10.25 33.61 0.00 388 0 Peak
Avg	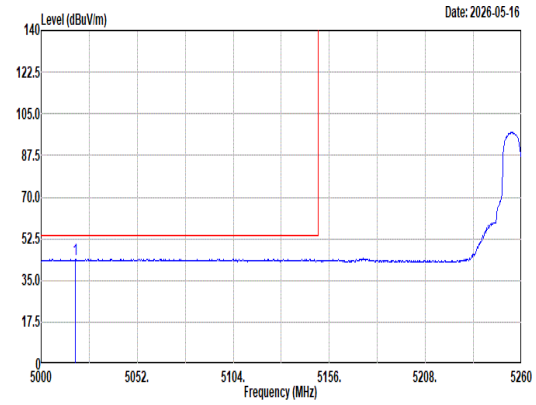 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5018.46 43.96 54.00 -10.04 34.05 33.56 10.02 33.67 0.00 388 0 Average	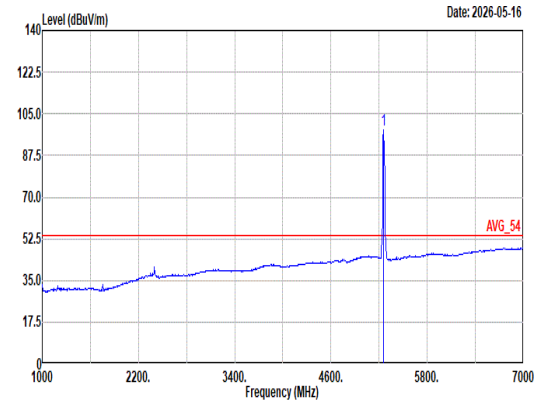 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5260.00 98.48 ------ ------ 88.56 33.28 10.25 33.61 0.00 388 0 Average

Mode	30	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_106/53 RU_5260MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	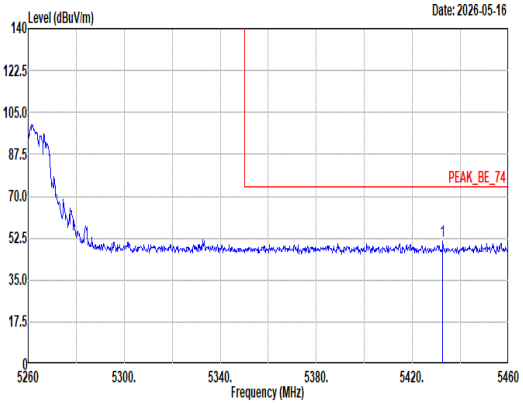 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5432.60 51.19 74.00 -22.81 41.14 33.20 10.42 33.57 0.00 388 0 Peak	Blank
Avg	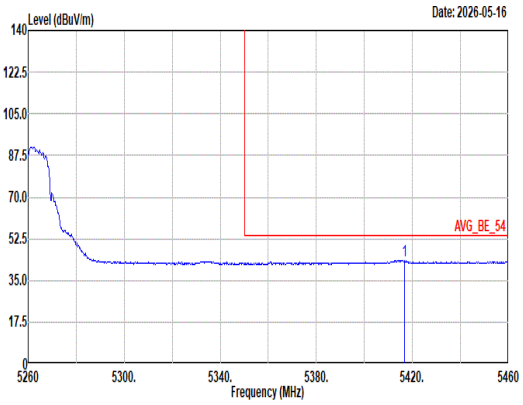 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5416.80 43.53 54.00 -10.47 33.51 33.20 10.40 33.58 0.00 388 0 Average	Blank

Mode	30	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_106/53 RU_5260MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	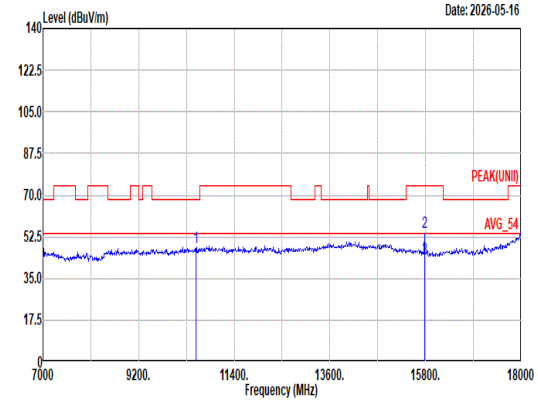 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10520.00 47.98 68.20 -20.22 48.34 38.84 15.99 55.78 0.59 -- -- Peak 2 15780.00 54.63 74.00 -19.37 52.23 38.04 19.25 55.22 0.33 100 160 Peak 3 15780.00 43.06 54.00 -10.94 40.66 38.04 19.25 55.22 0.33 100 160 Average	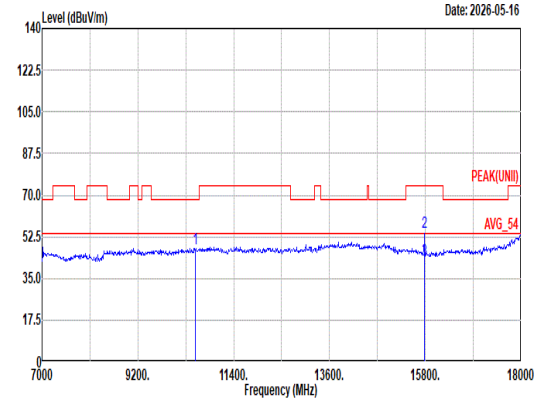 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10520.00 47.68 68.20 -20.52 48.04 38.84 15.99 55.78 0.59 -- -- Peak 2 15780.00 54.60 74.00 -19.40 52.20 38.04 19.25 55.22 0.33 115 120 Peak 3 15780.00 42.68 54.00 -11.32 40.28 38.04 19.25 55.22 0.33 115 120 Average

Mode	30	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_106/53 RU_5260MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	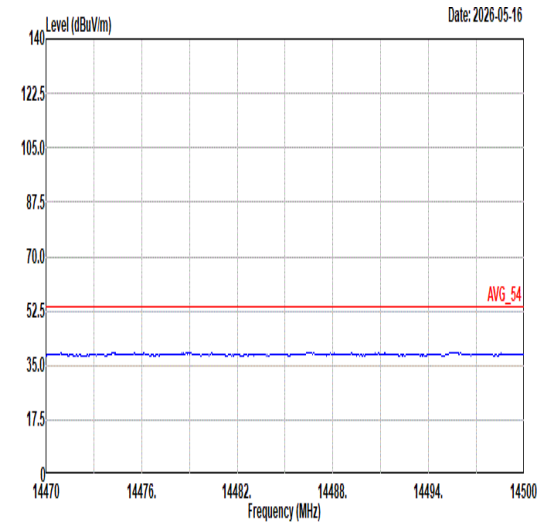 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	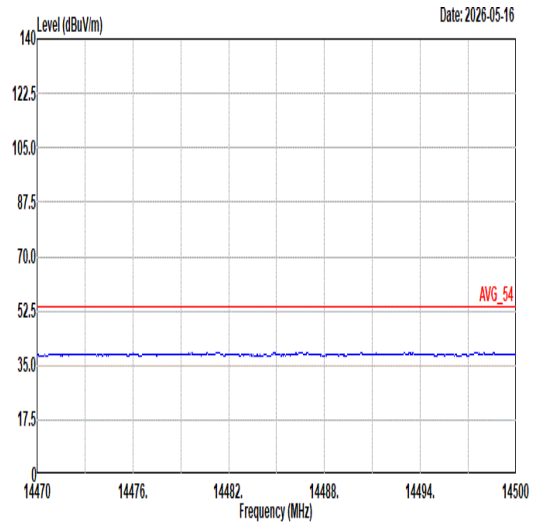 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	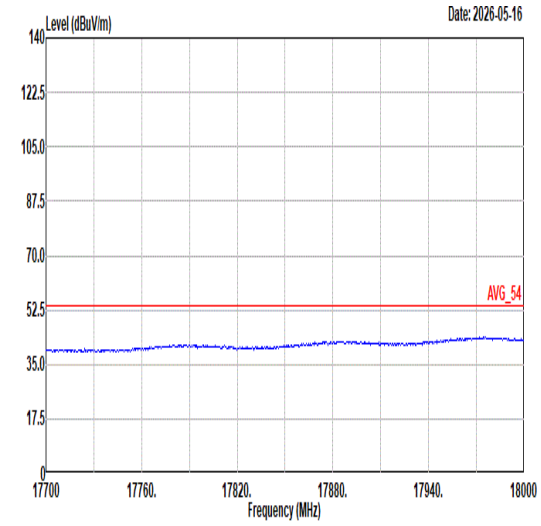 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	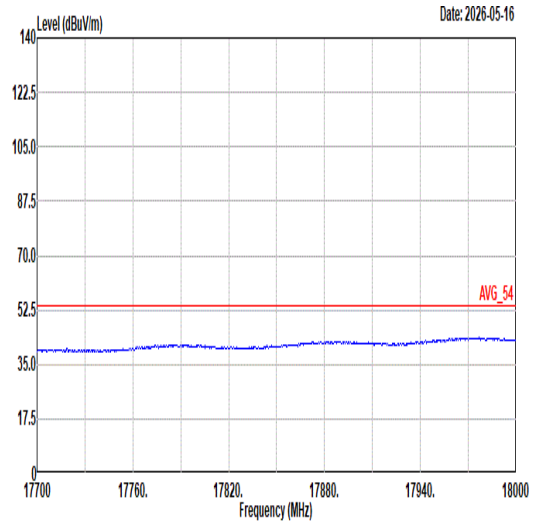 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	31	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	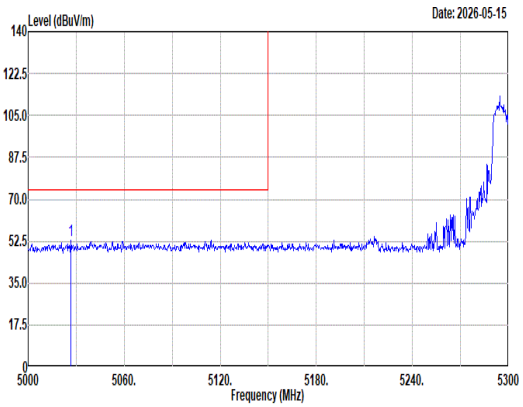 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5026.70 52.90 74.00 -21.10 42.98 33.55 10.03 33.66 0.00 100 259 Peak	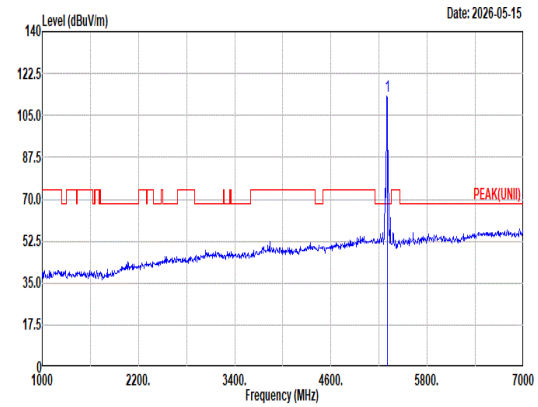 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 112.82 ------ ------ 103.01 33.12 10.29 33.60 0.00 100 259 Peak
Avg	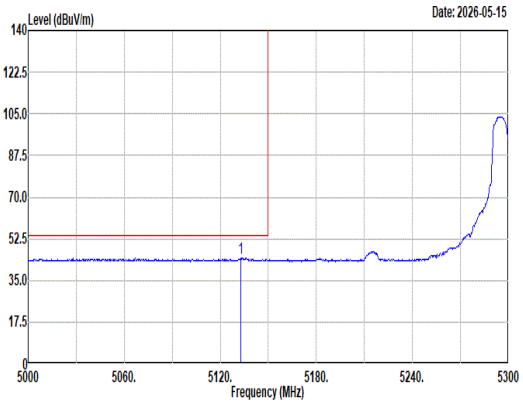 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5132.60 44.37 54.00 -9.63 34.60 33.27 10.14 33.64 0.00 100 259 Average	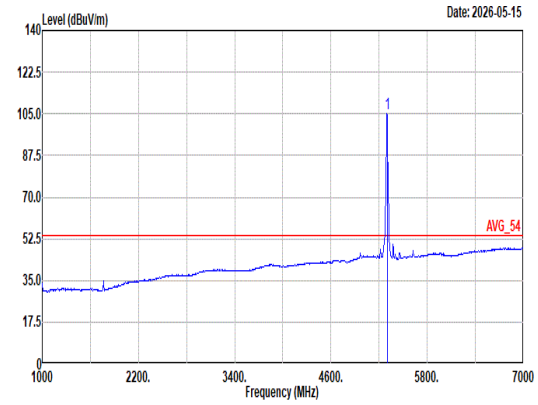 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 105.05 ------ ------ 95.24 33.12 10.29 33.60 0.00 100 259 Average

Mode	31	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	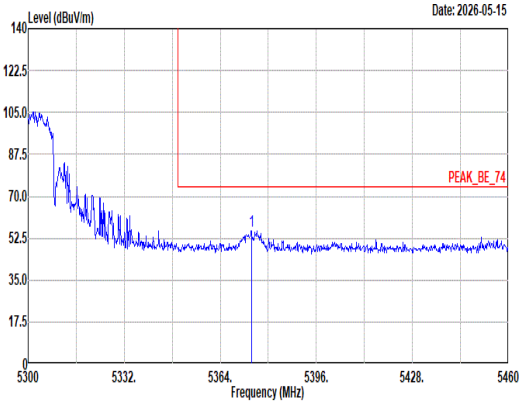 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5374.40 55.71 74.00 -18.29 45.80 33.15 10.35 33.59 0.00 100 259 Peak	Blank
Avg	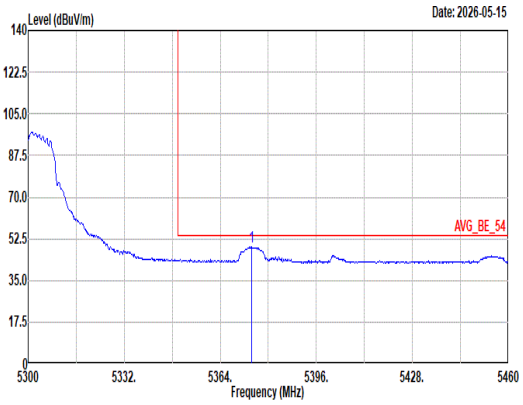 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5374.40 49.07 54.00 -4.93 39.16 33.15 10.35 33.59 0.00 100 259 Average	Blank

Mode	31	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	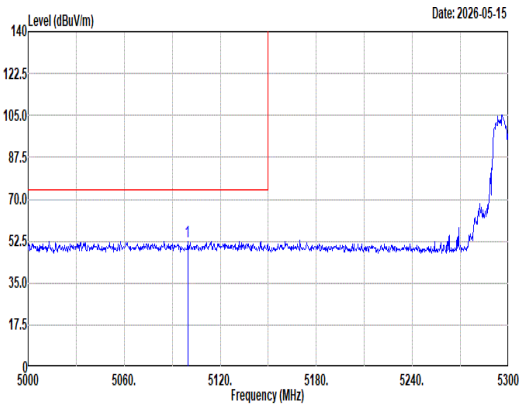 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5099.60 52.47 74.00 -21.53 42.82 33.20 10.10 33.65 0.00 400 182 Peak	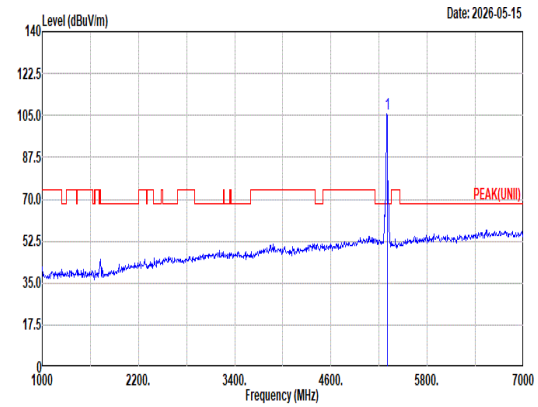 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 105.62 ------ ------ 95.81 33.12 10.29 33.60 0.00 400 182 Peak
Avg	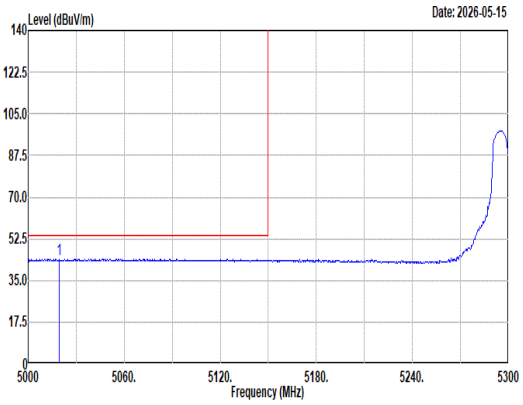 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5019.20 43.96 54.00 -10.04 34.05 33.56 10.02 33.67 0.00 400 182 Average	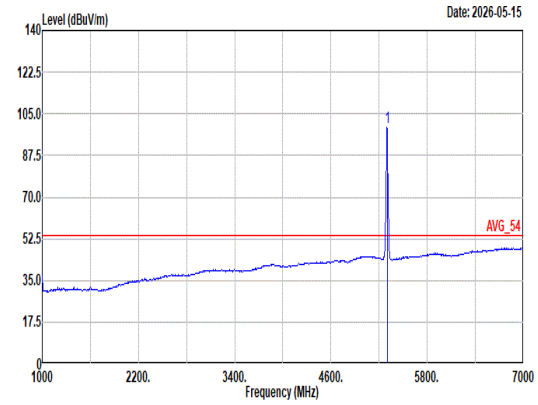 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 99.24 ------ ------ 89.43 33.12 10.29 33.60 0.00 400 182 Average

Mode	31	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	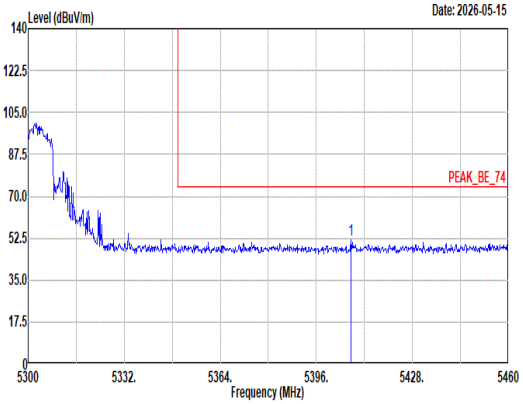 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5407.52 51.98 74.00 -22.02 41.98 33.20 10.38 33.58 0.00 400 182 Peak	Blank
Avg	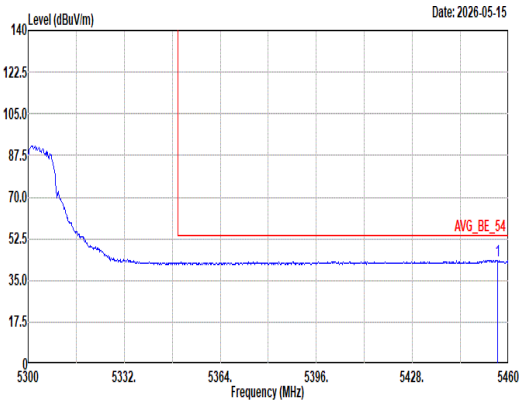 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5456.32 43.53 54.00 -10.47 33.44 33.20 10.46 33.57 0.00 400 182 Average	Blank

Mode	31	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	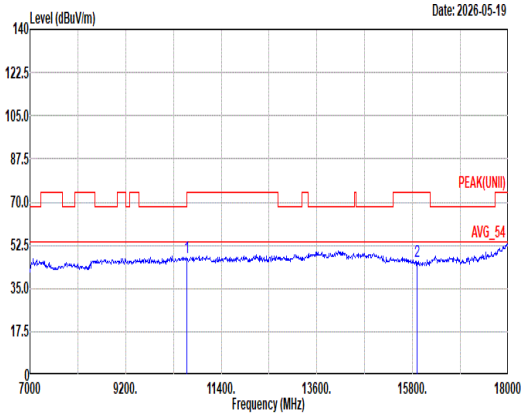 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL 1 10600.00 47.56 74.00 -26.44 47.37 39.20 16.07 55.67 0.59 -- -- Peak 2 15900.00 45.78 74.00 -28.22 43.29 38.10 19.26 55.19 0.32 -- -- Peak	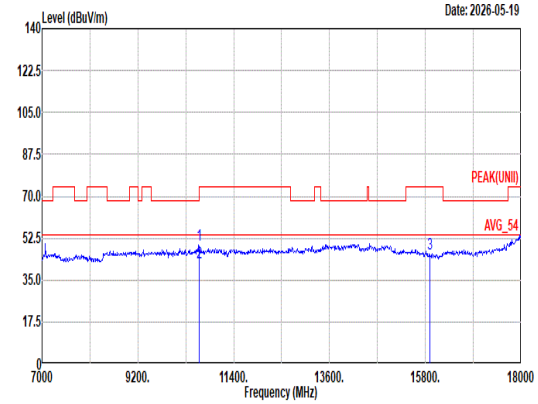 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL 1 10600.00 49.44 74.00 -24.56 49.25 39.20 16.07 55.67 0.59 100 48 Peak 2 10600.00 42.44 54.00 -11.56 42.25 39.20 16.07 55.67 0.59 100 48 Average 3 15900.00 45.94 74.00 -28.06 43.45 38.10 19.26 55.19 0.32 -- -- Peak

Mode	31	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_106/53 RU_5300MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	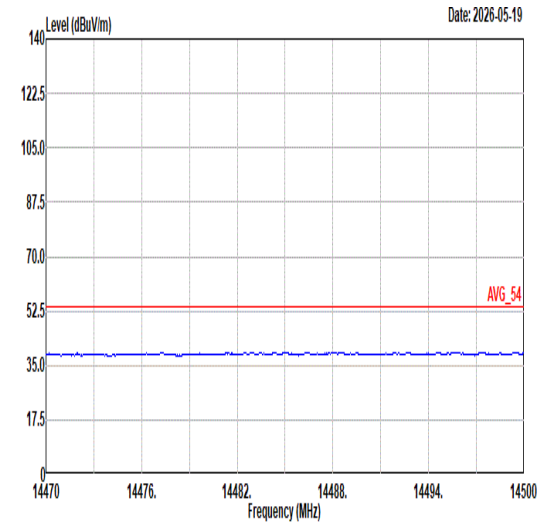 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	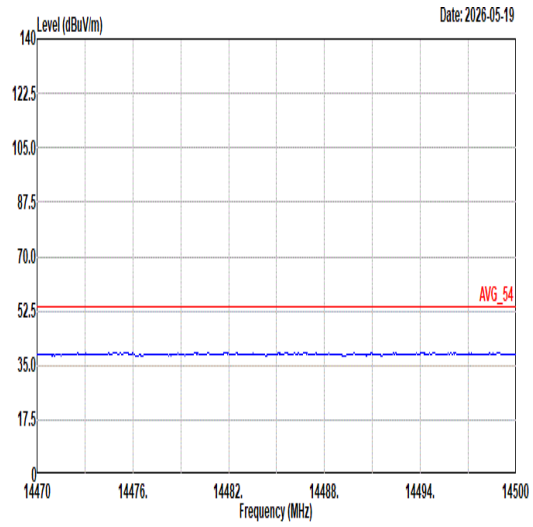 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	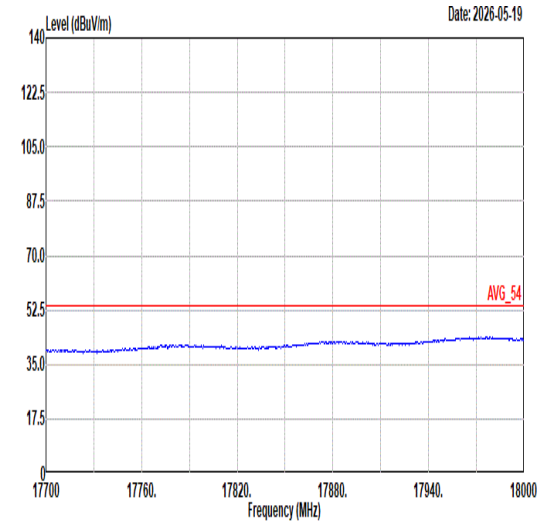 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	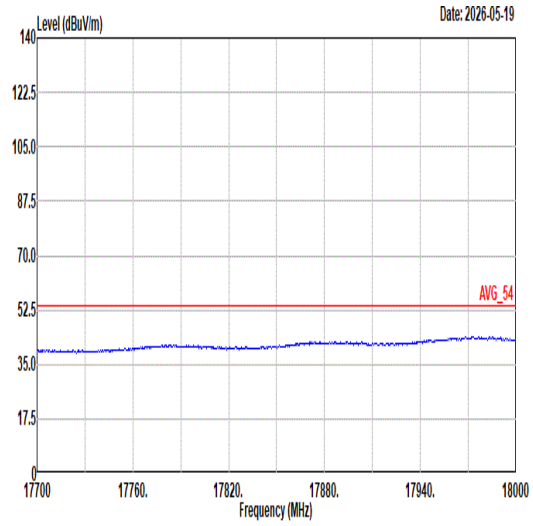 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	32	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_106/54 RU_5320MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	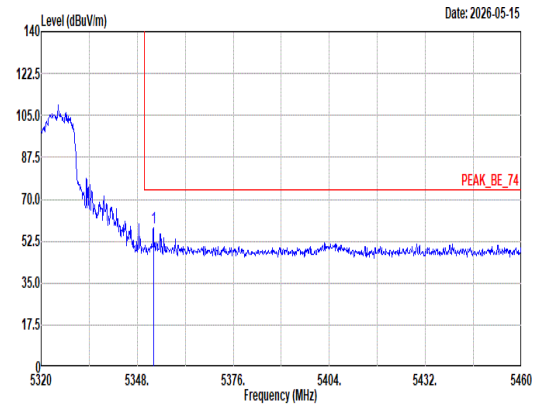 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.76 57.94 74.00 -16.06 48.09 33.11 10.33 33.59 0.00 300 225 Peak	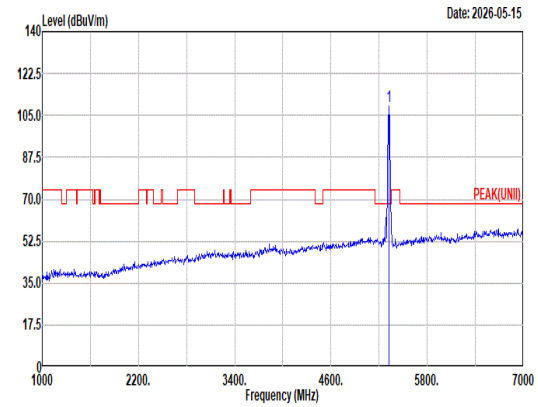 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 109.02 ------ ------ 99.21 33.10 10.31 33.60 0.00 300 225 Peak
Avg	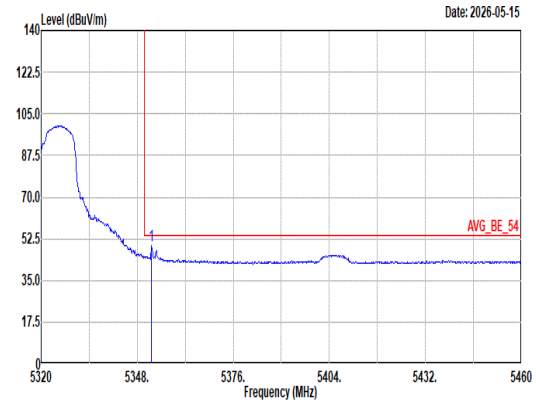 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.06 49.86 54.00 -4.14 40.02 33.10 10.33 33.59 0.00 300 225 Average	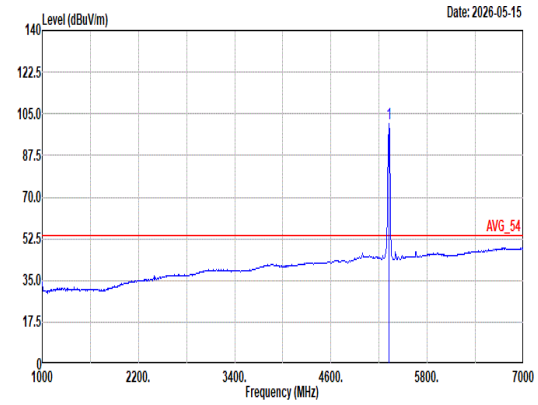 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 101.05 ------ ------ 91.24 33.10 10.31 33.60 0.00 300 225 Average

Mode	32	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_106/54 RU_5320MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	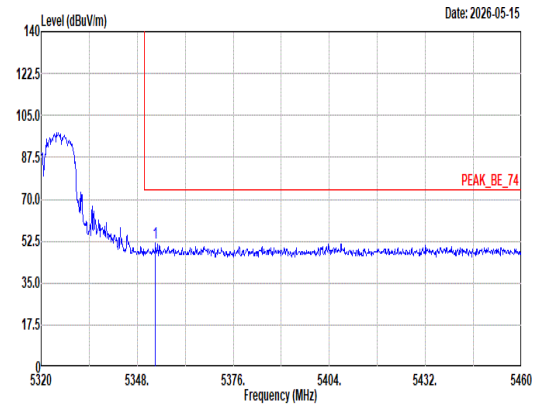 Site : 03CH12-HY Condition: PEAK_BE_74 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.32 51.98 74.00 -22.02 42.13 33.11 10.33 33.59 0.00 300 137 Peak	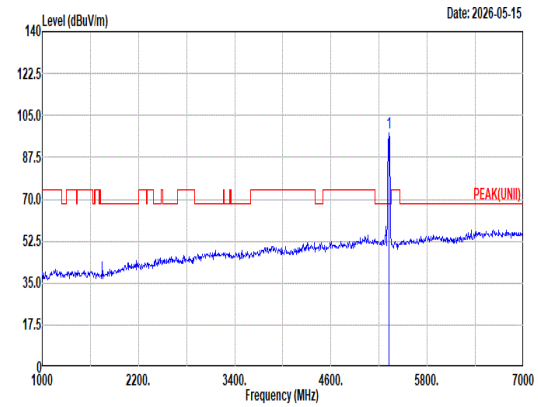 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 97.79 ------ ------ 87.98 33.10 10.31 33.60 0.00 300 137 Peak
Avg	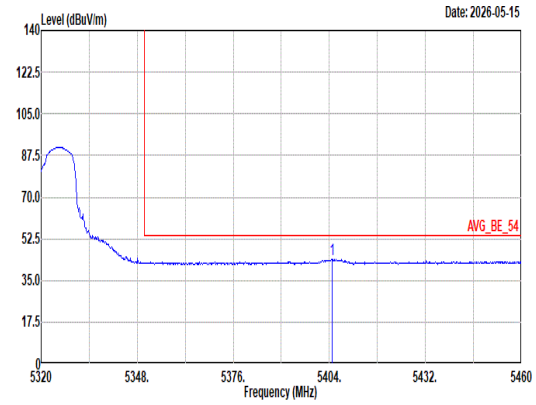 Site : 03CH12-HY Condition: AVG_BE_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5404.84 43.84 54.00 -10.16 33.84 33.20 10.38 33.58 0.00 300 137 Average	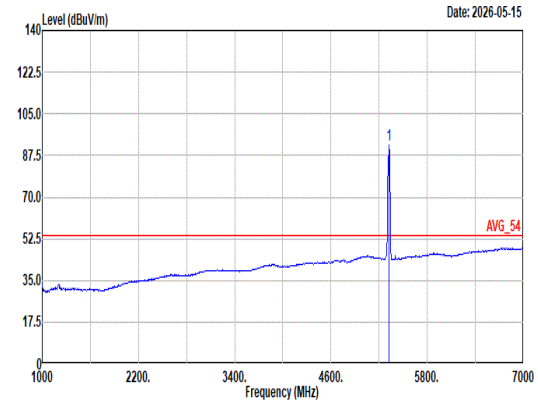 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 92.15 ------ ------ 82.34 33.10 10.31 33.60 0.00 300 137 Average

Mode	32	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_106/54 RU_5320MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	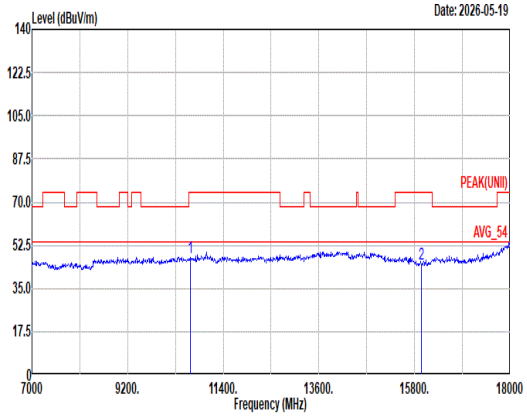 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10640.00 47.38 74.00 -26.62 47.10 39.20 16.11 55.62 0.59 -- -- Peak 2 15960.00 45.13 74.00 -28.87 42.55 38.18 19.26 55.17 0.31 -- -- Peak	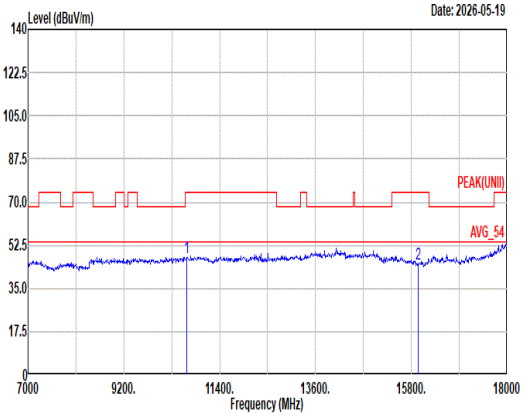 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10640.00 47.70 74.00 -26.30 47.42 39.20 16.11 55.62 0.59 -- -- Peak 2 15960.00 45.05 74.00 -28.95 42.47 38.18 19.26 55.17 0.31 -- -- Peak

Mode	32	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_106/54 RU_5320MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	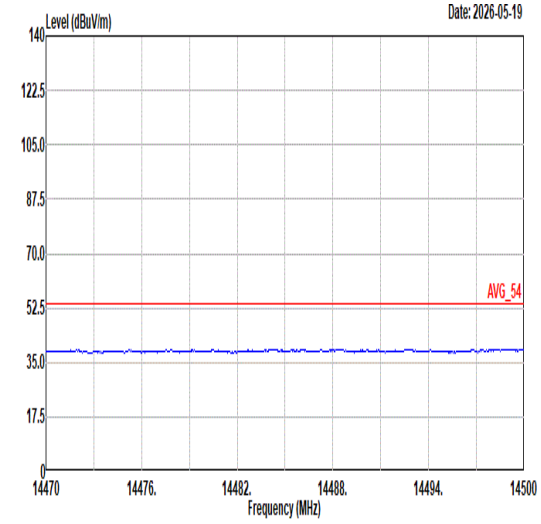 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	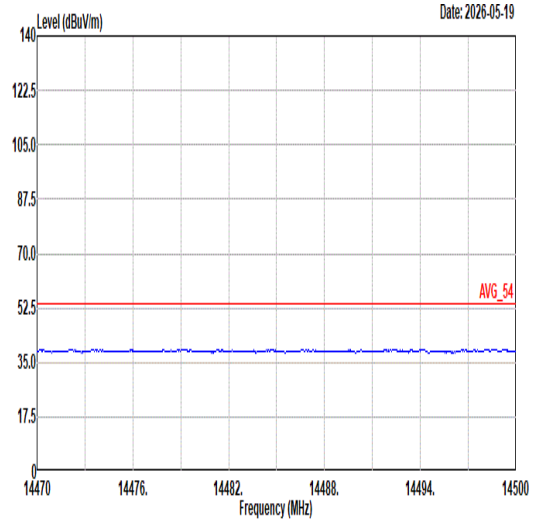 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	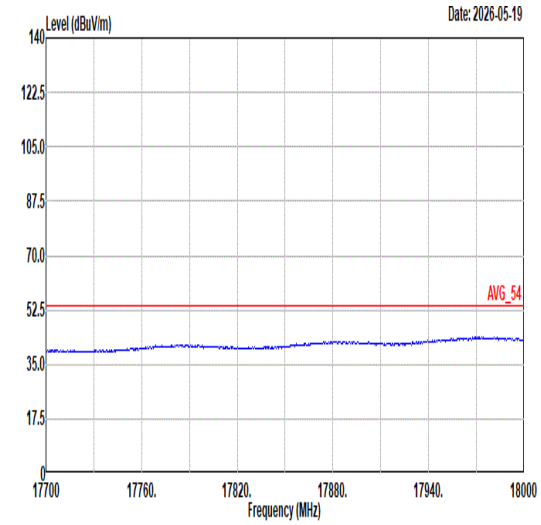 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	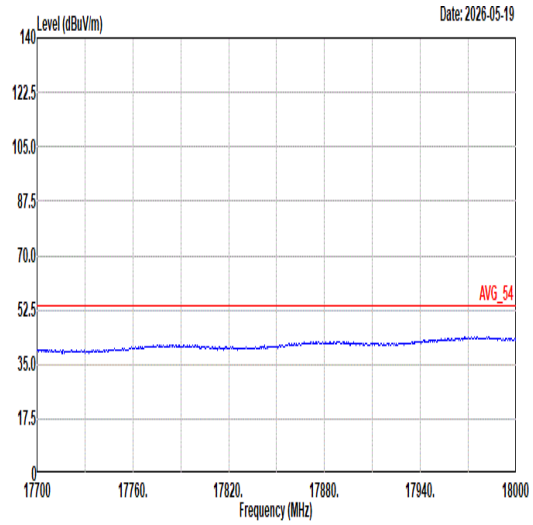 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	33	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	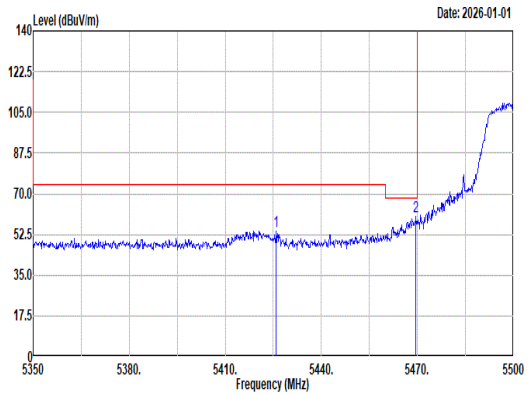 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5425.90 54.05 74.00 -19.95 44.42 33.20 10.41 33.98 0.00 387 148 Peak 2 5469.55 60.45 68.20 -7.75 50.75 33.20 10.48 33.98 0.00 387 148 Peak	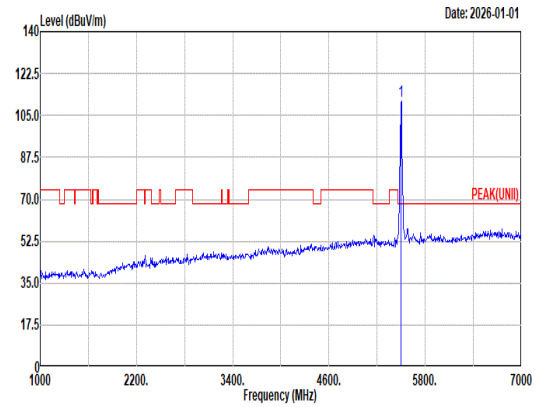 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 110.80 ------ ------ 101.03 33.21 10.54 33.98 0.00 387 148 Peak
Avg	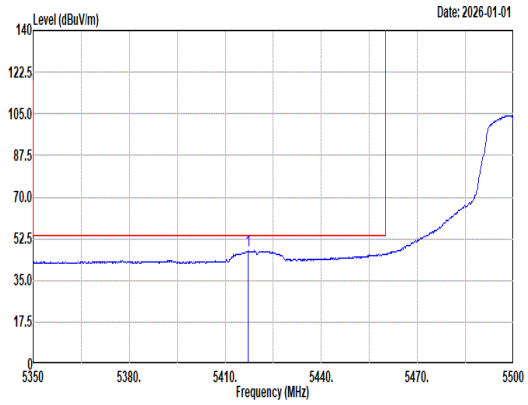 Site : 03CH23-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5417.20 47.37 54.00 -6.63 37.75 33.20 10.40 33.98 0.00 387 148 Average	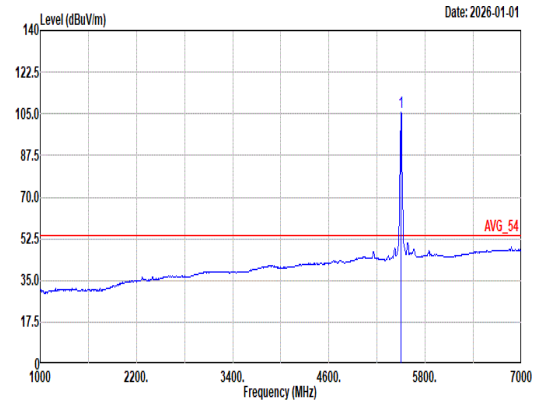 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 105.90 ------ ------ 96.15 33.20 10.53 33.98 0.00 387 148 Average

Mode	33	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	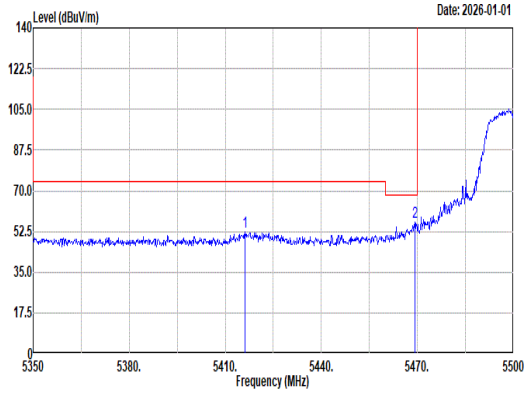 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5416.15 52.05 74.00 -21.95 42.43 33.20 10.40 33.98 0.00 392 67 Peak 2 5469.25 56.46 68.20 -11.74 46.76 33.20 10.48 33.98 0.00 392 67 Peak	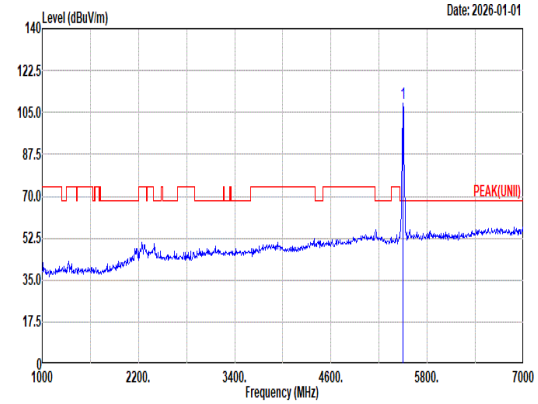 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 108.65 ------ ------ 98.90 33.20 10.53 33.98 0.00 392 67 Peak
Avg	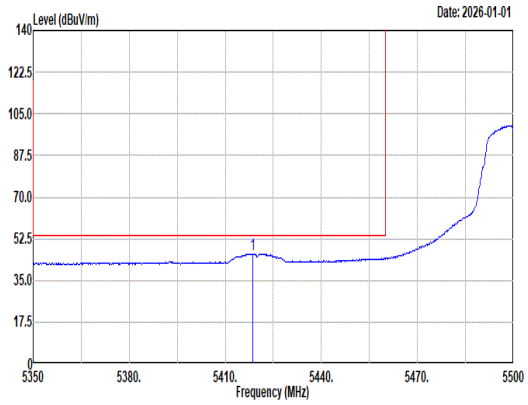 Site : 03CH23-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5418.55 46.20 54.00 -7.80 36.58 33.20 10.40 33.98 0.00 392 67 Average	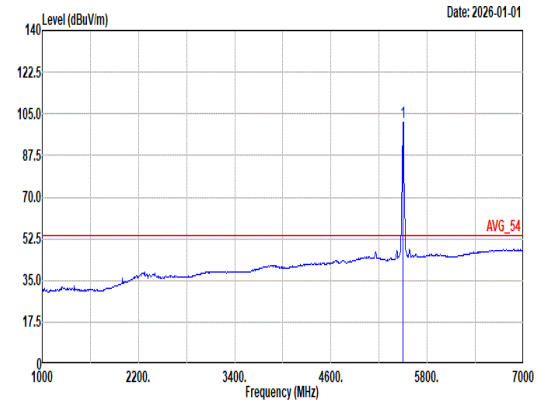 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 101.50 ------ ------ 91.75 33.20 10.53 33.98 0.00 392 67 Average

Mode	33	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	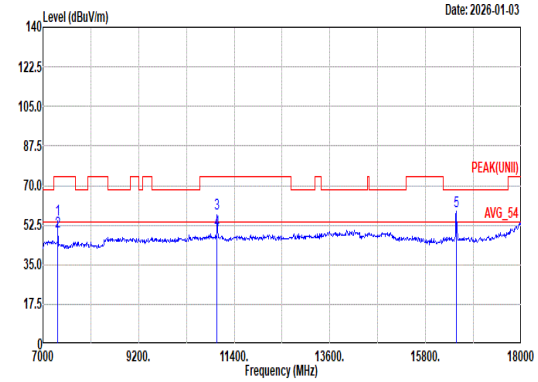 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7333.00 54.85 74.00 -19.15 60.32 37.10 13.42 56.45 0.46 400 152 Peak 2 7333.00 49.86 54.00 -4.14 55.33 37.10 13.42 56.45 0.46 400 152 Average 3 11000.00 57.66 74.00 -16.34 57.20 38.90 16.47 55.13 0.22 200 188 Peak 4 11000.00 50.44 54.00 -3.56 49.98 38.90 16.47 55.13 0.22 200 188 Average 5 16500.00 58.42 68.20 -9.78 55.47 38.30 19.78 55.27 0.14 -- -- Peak	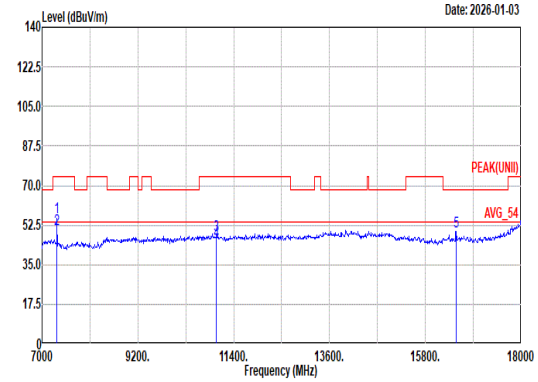 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7333.00 55.76 74.00 -18.24 61.23 37.10 13.42 56.45 0.46 100 169 Peak 2 7333.00 50.87 54.00 -3.13 56.34 37.10 13.42 56.45 0.46 100 169 Average 3 11000.00 48.24 74.00 -25.76 47.78 38.90 16.47 55.13 0.22 172 211 Peak 4 11000.00 45.24 54.00 -8.76 44.78 38.90 16.47 55.13 0.22 172 211 Average 5 16500.00 49.86 68.20 -18.34 46.91 38.30 19.78 55.27 0.14 -- -- Peak

Mode	33	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	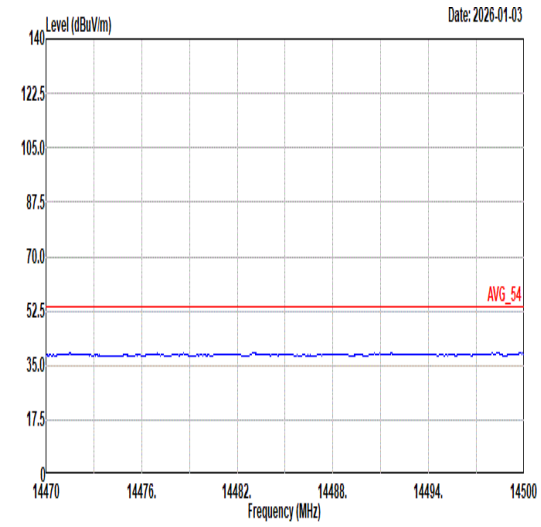 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	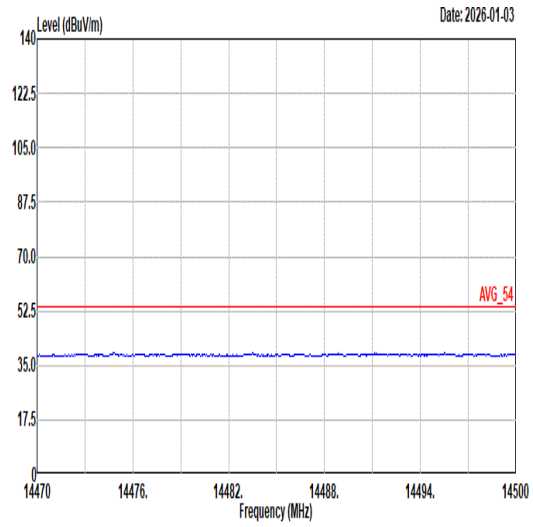 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	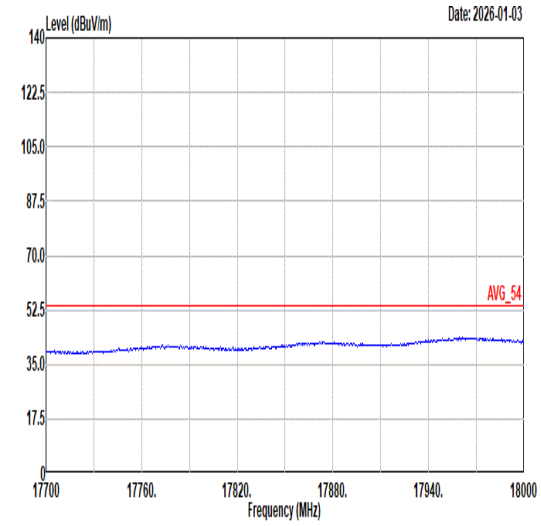 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	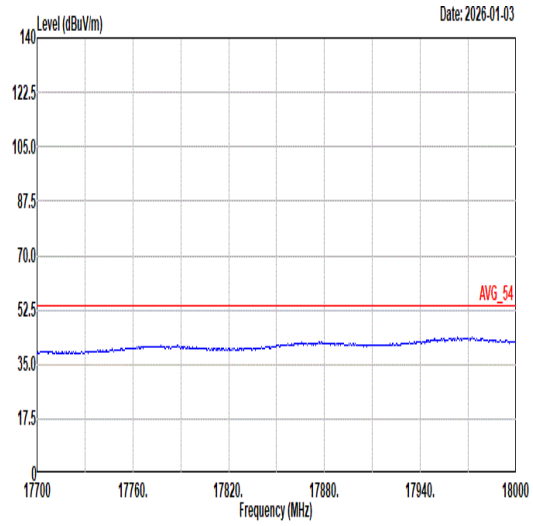 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	34	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	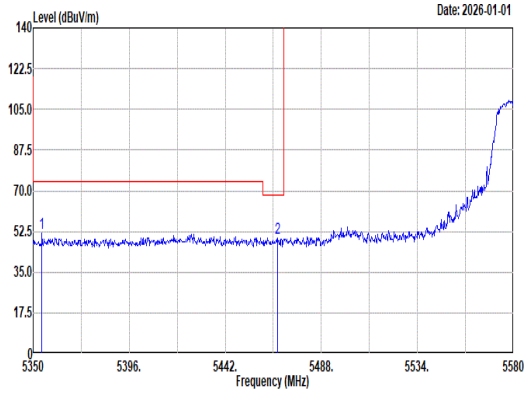 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5354.14 51.92 74.00 -22.08 42.46 33.11 10.33 33.98 0.00 176 164 Peak 2 5467.07 49.87 68.20 -18.33 40.17 33.20 10.48 33.98 0.00 176 164 Peak	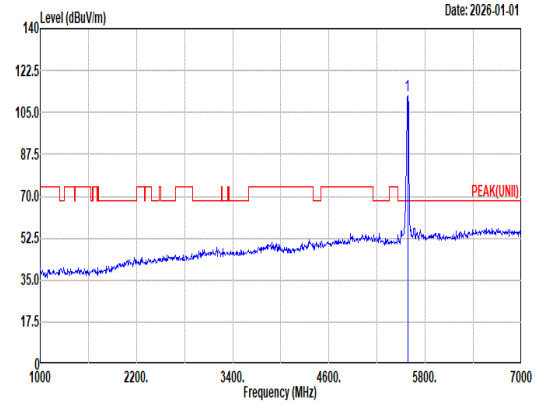 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 111.98 ------ ------ 102.01 33.30 10.66 33.99 0.00 176 164 Peak
Avg	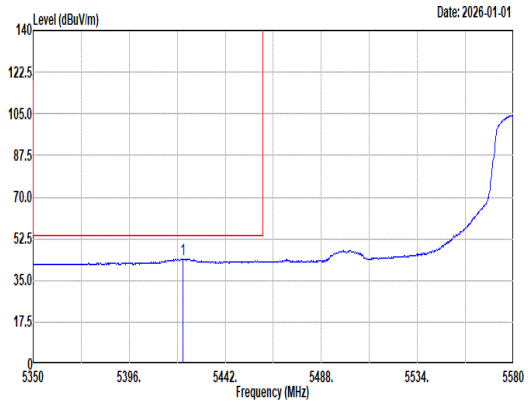 Site : 03CH23-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5421.76 44.01 54.00 -9.99 34.39 33.20 10.40 33.98 0.00 176 164 Average	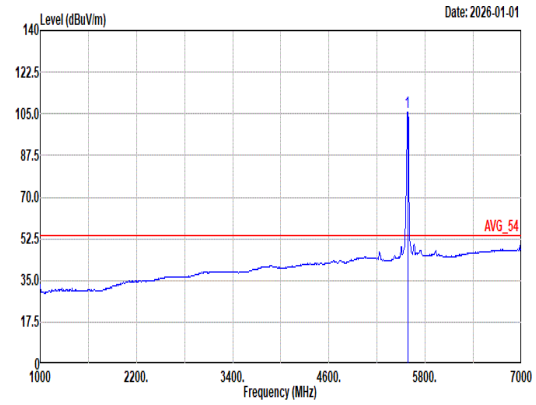 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 105.59 ------ ------ 95.63 33.30 10.65 33.99 0.00 176 164 Average

Mode	34	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	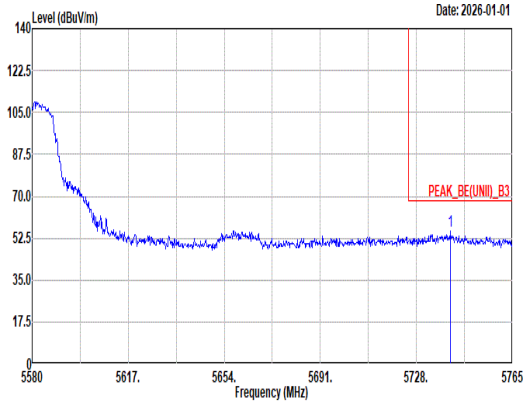 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5741.14 55.41 68.20 -12.79 44.81 33.86 10.75 34.01 0.00 176 164 Peak	Blank

Mode	34
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz
ANT	1

Pol.	Vertical	Fundamental
Peak	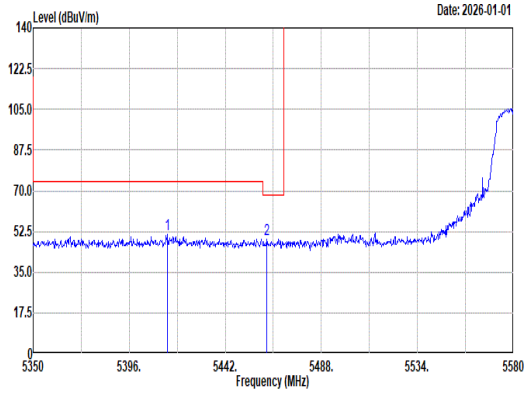 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5414.40 51.03 74.00 -22.97 41.42 33.20 10.39 33.98 0.00 300 102 Peak 2 5462.01 49.06 68.20 -19.14 39.37 33.20 10.47 33.98 0.00 300 102 Peak	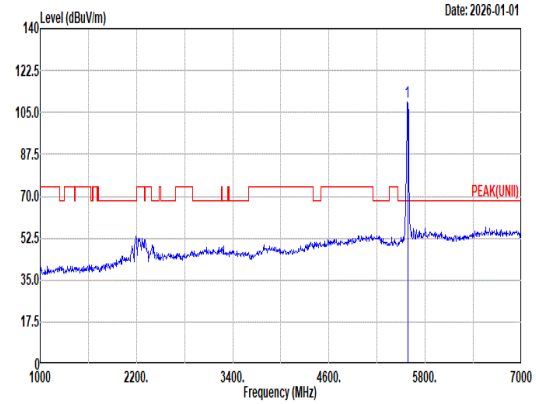 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 109.56 ------ ------ 99.60 33.30 10.65 33.99 0.00 300 102 Peak
Avg	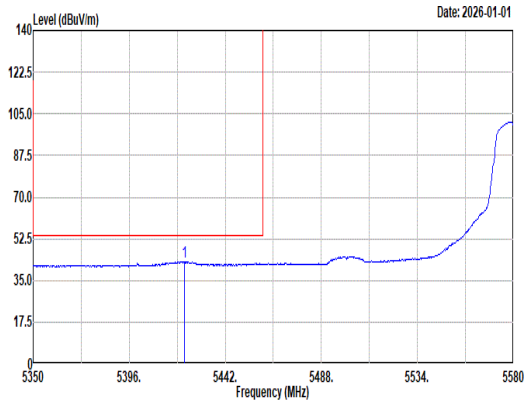 Site : 03CH23-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5422.45 42.77 54.00 -11.23 33.14 33.20 10.41 33.98 0.00 300 102 Average	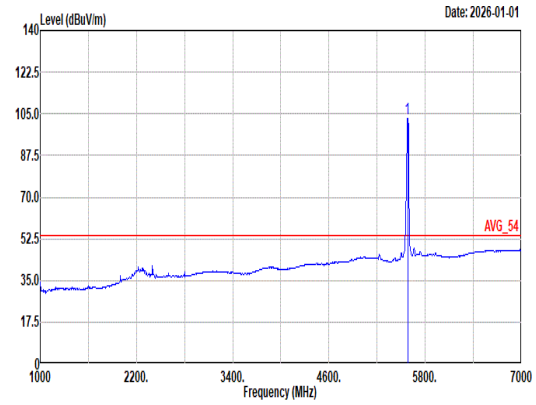 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 103.22 ------ ------ 93.25 33.30 10.66 33.99 0.00 300 102 Average

Mode	34	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	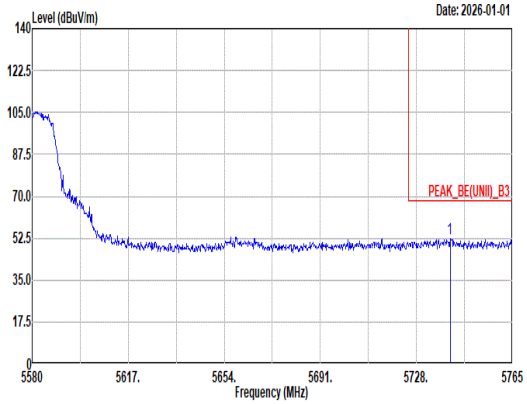 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5740.95 52.54 68.20 -15.66 41.94 33.86 10.75 34.01 0.00 300 102 Peak	Blank

Mode	34	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	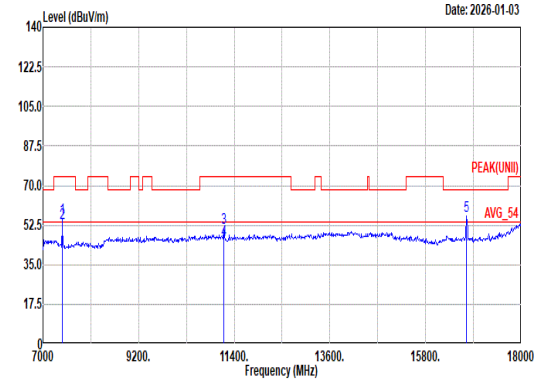 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 55.37 74.00 -18.63 61.21 36.74 13.51 56.49 0.40 300 191 Peak 2 7440.00 53.37 54.00 -0.63 59.21 36.74 13.51 56.49 0.40 300 191 Average 3 11160.00 51.22 74.00 -22.78 50.35 39.08 16.58 55.03 0.24 211 123 Peak 4 11160.00 46.14 54.00 -7.86 45.27 39.08 16.58 55.03 0.24 211 123 Average 5 16740.00 56.48 68.20 -11.72 53.89 38.24 20.04 55.85 0.16 -- -- Peak	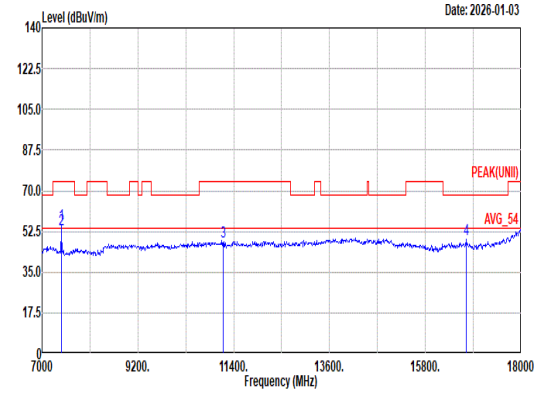 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7440.00 55.40 74.00 -18.60 61.24 36.74 13.51 56.49 0.40 400 132 Peak 2 7440.00 53.48 54.00 -0.52 59.32 36.74 13.51 56.49 0.40 400 132 Average 3 11160.00 47.89 74.00 -26.11 47.02 39.08 16.58 55.03 0.24 -- -- Peak 4 16740.00 48.89 68.20 -19.31 46.30 38.24 20.04 55.85 0.16 -- -- Peak

Mode	34	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	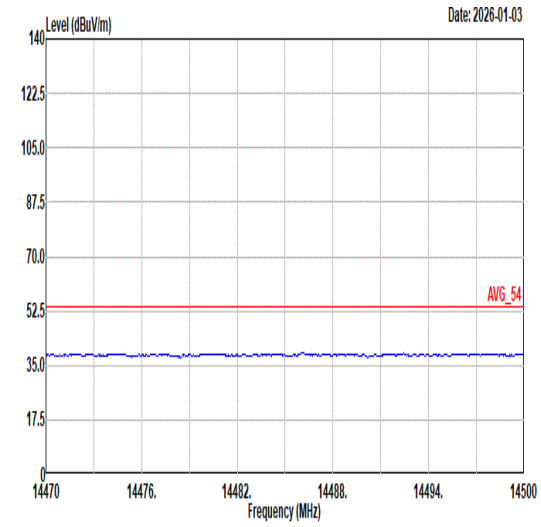 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	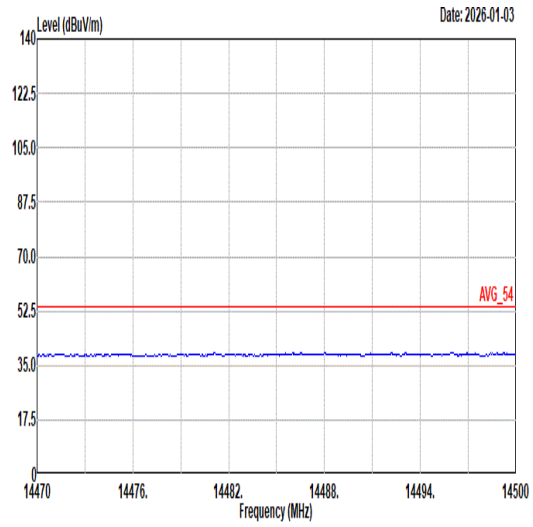 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	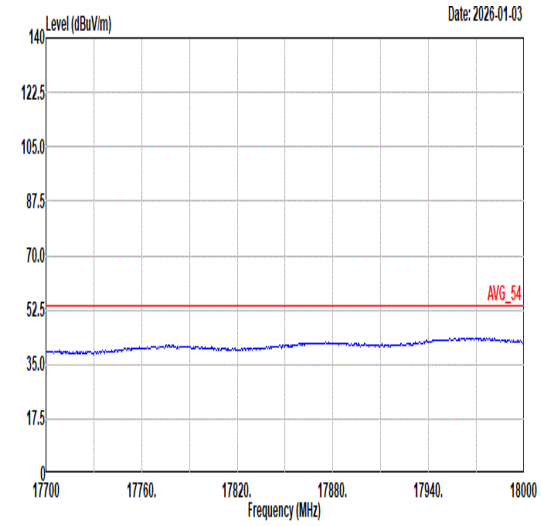 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	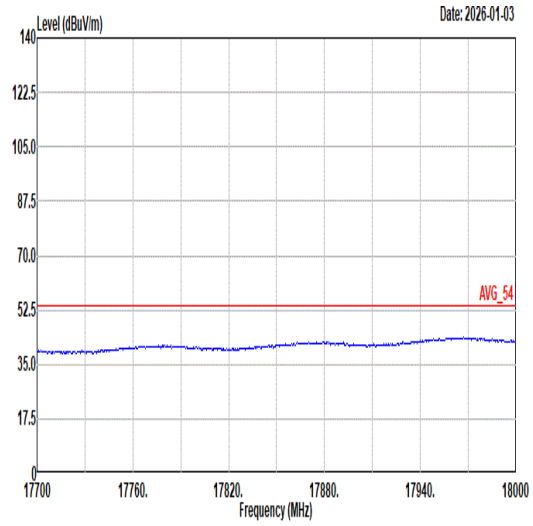 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	35	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	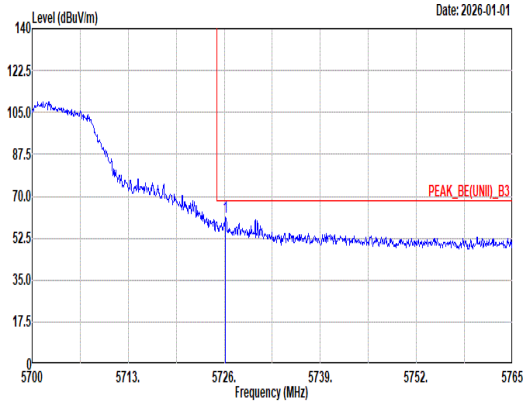 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.20 61.13 68.20 -7.07 50.60 33.80 10.74 34.01 0.00 200 160 Peak	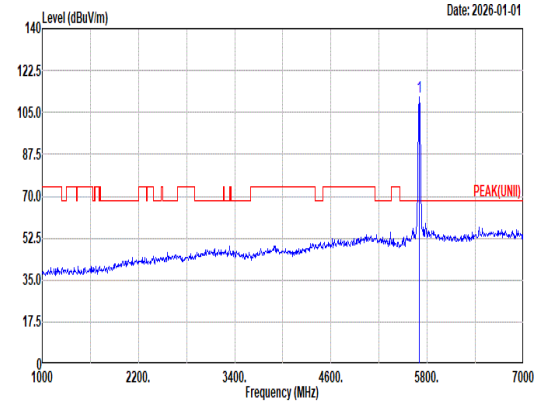 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 111.30 ------ ------ 100.86 33.72 10.73 34.01 0.00 200 160 Peak
Avg	Blank	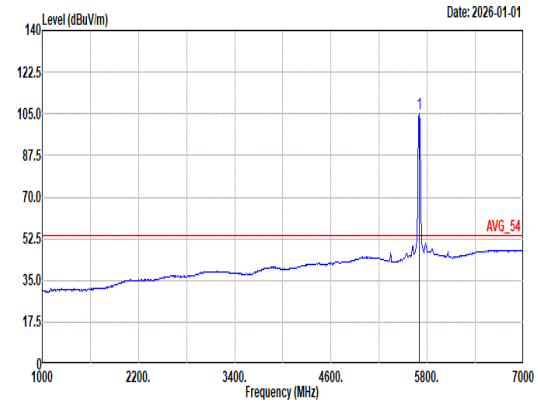 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 105.00 ------ ------ 94.59 33.69 10.73 34.01 0.00 200 160 Average

Mode	35	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	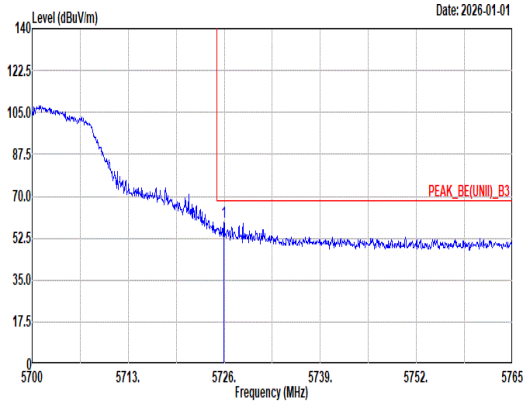 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5725.94 58.93 68.20 -9.27 48.40 33.80 10.74 34.01 0.00 316 97 Peak	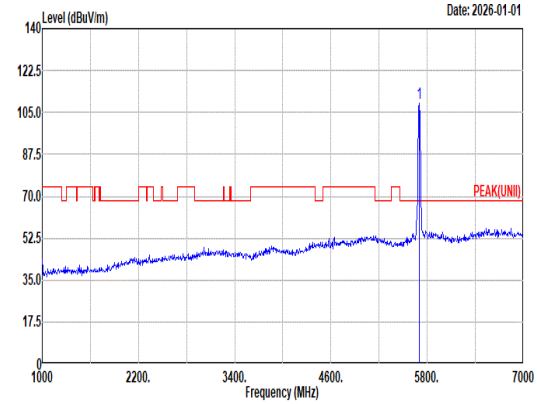 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 108.58 ------ ------ 98.14 33.72 10.73 34.01 0.00 316 97 Peak
Avg	Blank	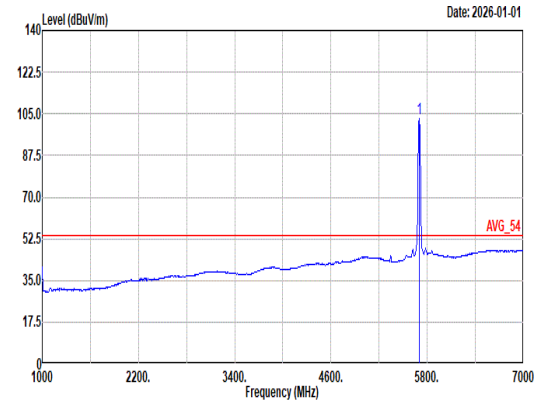 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 103.27 ------ ------ 92.83 33.72 10.73 34.01 0.00 316 97 Average

Mode	35	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	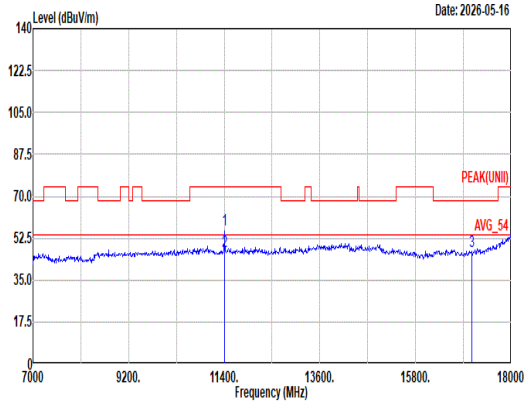 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL 1 11400.00 56.00 74.00 -18.00 54.32 39.20 16.75 54.87 0.60 101 56 Peak 2 11400.00 46.80 54.00 -7.20 45.12 39.20 16.75 54.87 0.60 101 56 Average 3 17100.00 46.83 68.20 -21.37 44.67 38.00 20.39 56.59 0.36 -- -- Peak	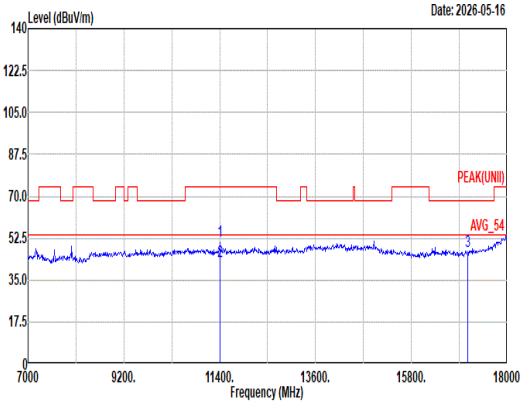 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL 1 11400.00 51.41 74.00 -22.59 49.73 39.20 16.75 54.87 0.60 107 99 Peak 2 11400.00 42.81 54.00 -11.19 41.13 39.20 16.75 54.87 0.60 107 99 Average 3 17100.00 47.11 68.20 -21.09 44.95 38.00 20.39 56.59 0.36 -- -- Peak

Mode	35	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	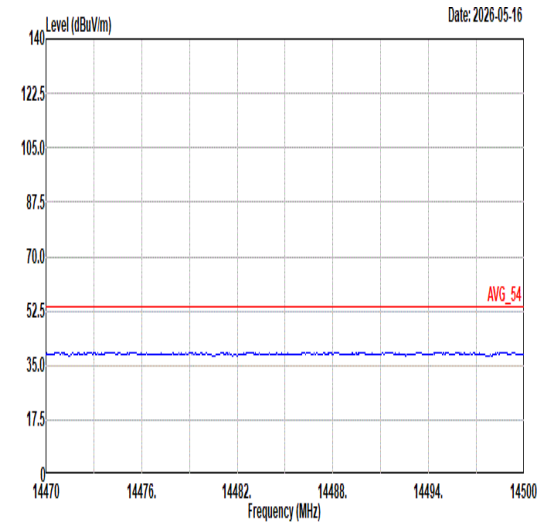 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	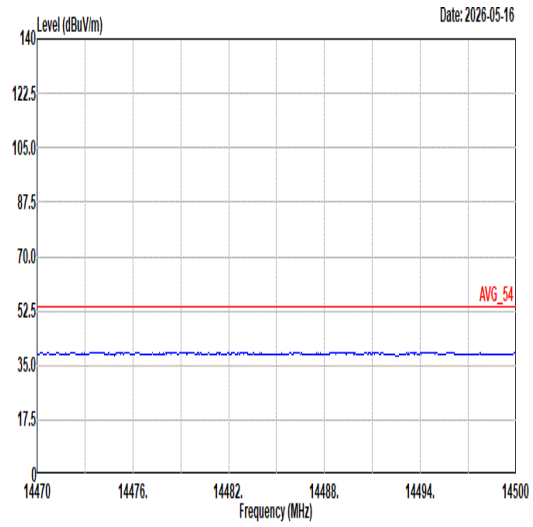 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	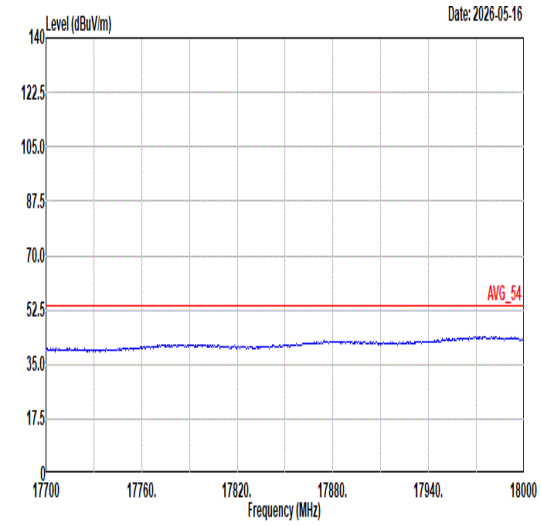 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	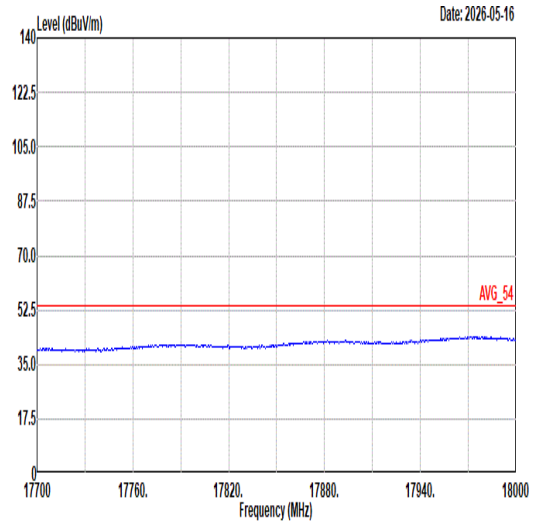 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	36	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	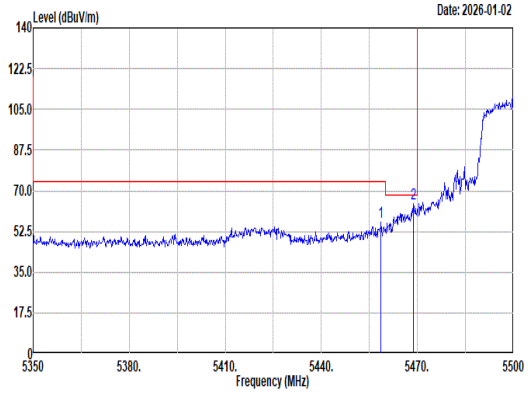 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5458.60 56.41 74.00 -17.59 46.73 33.20 10.46 33.98 0.00 200 165 Peak 2 5468.65 64.42 68.20 -3.78 54.72 33.20 10.48 33.98 0.00 200 165 Peak	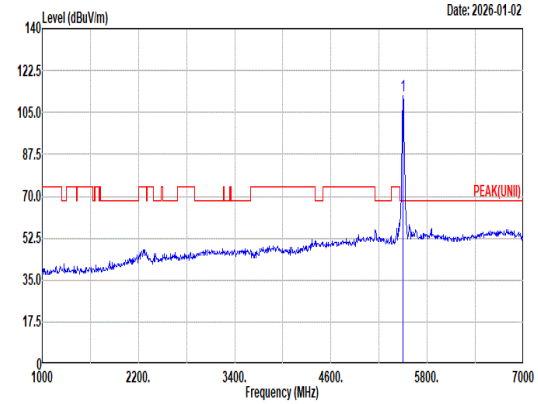 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5500.00 111.76 ------ ------ 102.01 33.20 10.53 33.98 0.00 200 165 Peak
Avg	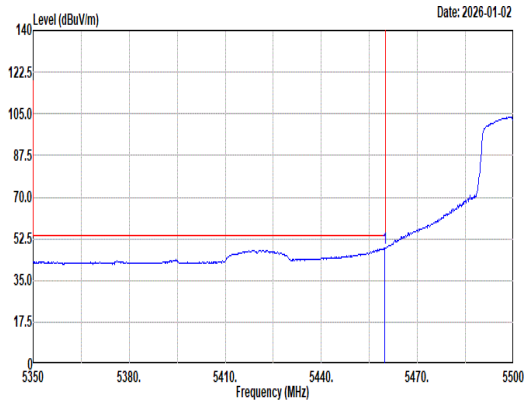 Site : 03CH23-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto 1 5459.80 48.78 54.00 -5.22 39.09 33.20 10.47 33.98 0.00 200 165 Average	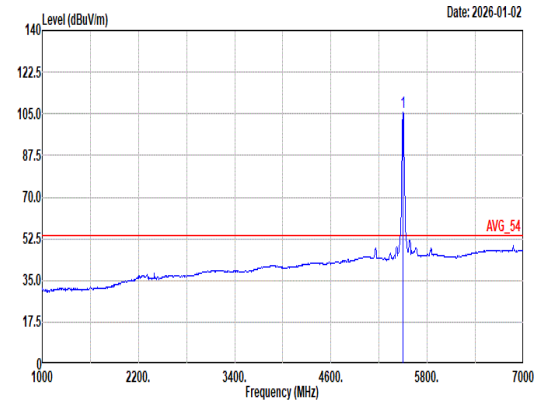 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto 1 5500.00 105.45 ------ ------ 95.70 33.20 10.53 33.98 0.00 200 165 Average

Mode	36	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	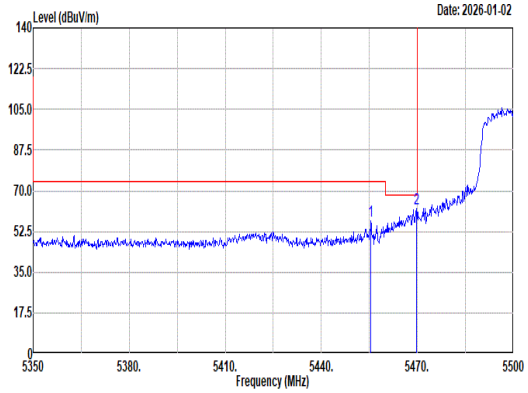 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5455.45 56.97 74.00 -17.03 47.29 33.20 10.46 33.98 0.00 300 88 Peak 2 5469.70 62.21 68.20 -5.99 52.51 33.20 10.48 33.98 0.00 300 88 Peak	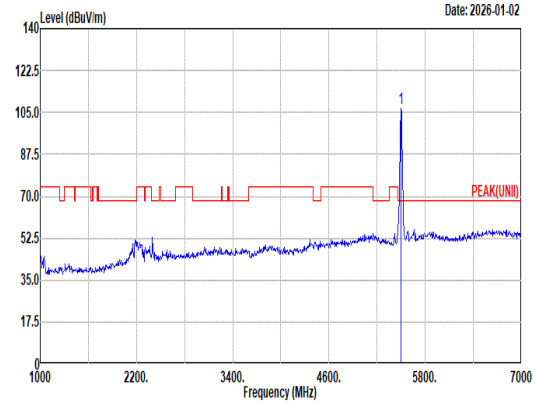 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 106.93 ------ ------ 97.18 33.20 10.53 33.98 0.00 300 88 Peak
Avg	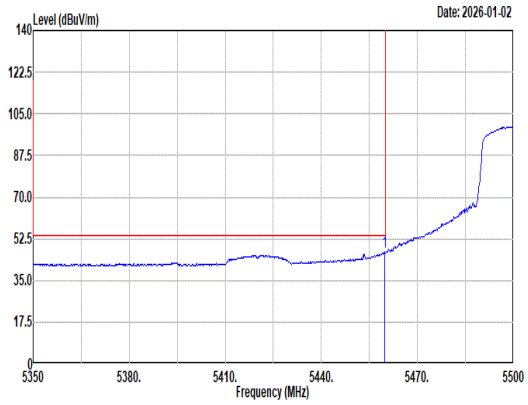 Site : 03CH23-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.80 46.85 54.00 -7.15 37.16 33.20 10.47 33.98 0.00 300 88 Average	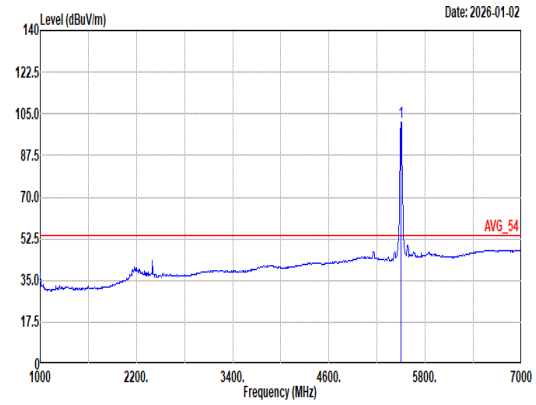 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 101.63 ------ ------ 91.88 33.20 10.53 33.98 0.00 300 88 Average

Mode	36	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	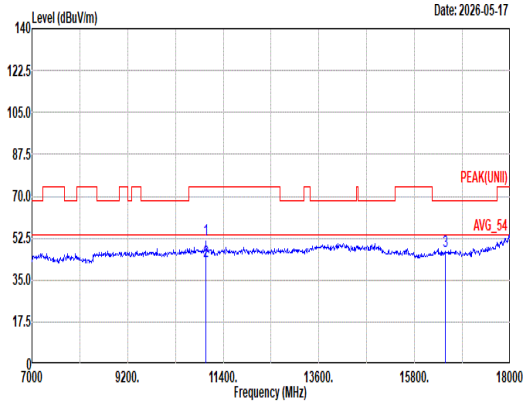 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11000.00 51.63 74.00 -22.37 50.79 38.90 16.47 55.13 0.60 100 58 Peak 2 11000.00 42.63 54.00 -11.37 41.79 38.90 16.47 55.13 0.60 100 58 Average 3 16500.00 47.10 68.20 -21.10 43.96 38.30 19.78 55.27 0.33 -- -- Peak	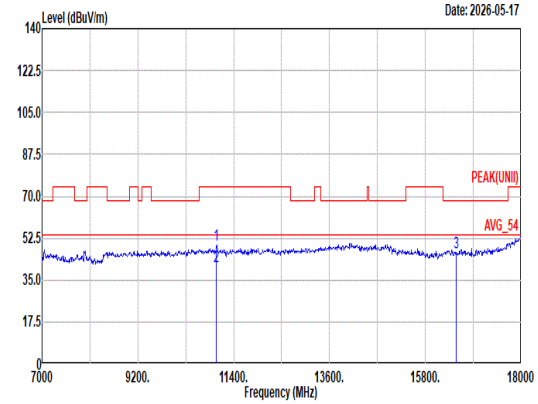 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11000.00 49.54 74.00 -24.46 48.70 38.90 16.47 55.13 0.60 112 103 Peak 2 11000.00 40.54 54.00 -13.46 39.70 38.90 16.47 55.13 0.60 112 103 Average 3 16500.00 46.75 68.20 -21.45 43.61 38.30 19.78 55.27 0.33 -- -- Peak

Mode	36	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	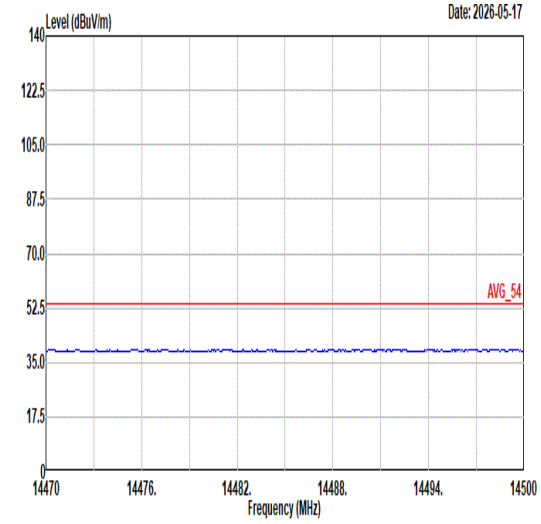 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	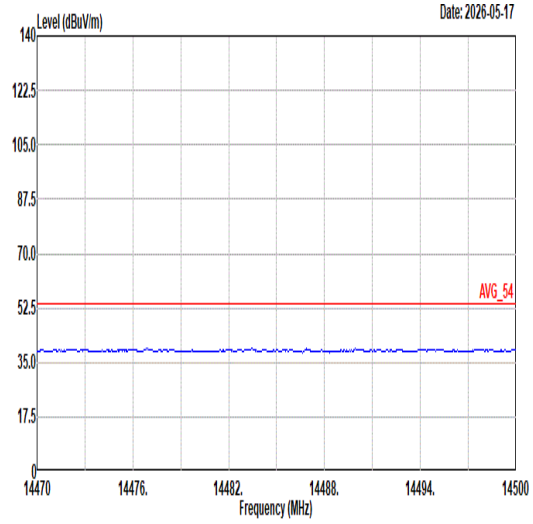 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	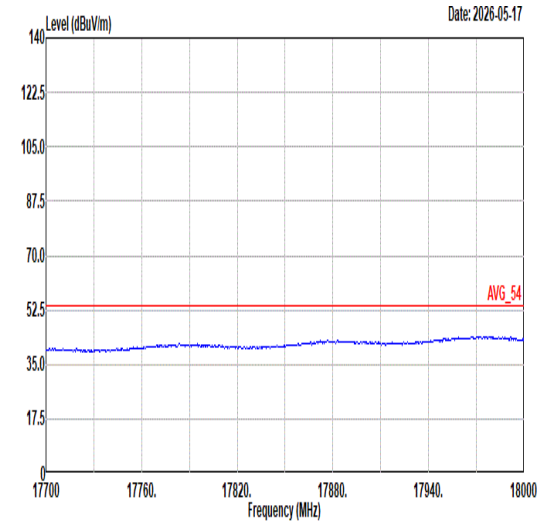 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	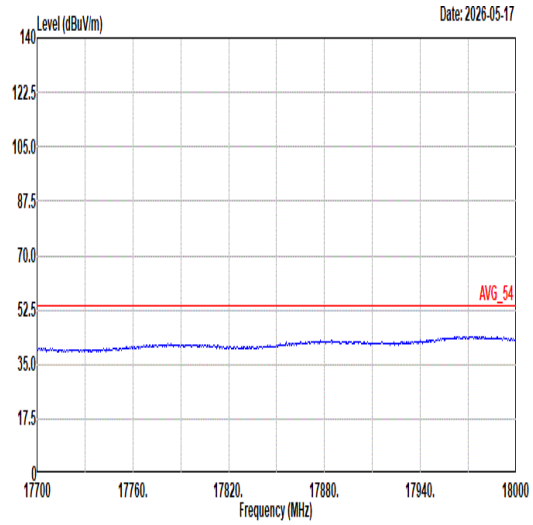 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	37	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_Full RU_5600MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	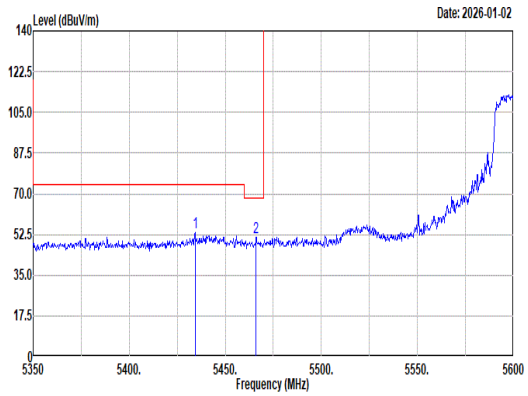 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5434.25 53.46 74.00 -20.54 43.82 33.20 10.42 33.98 0.00 191 147 Peak 2 5466.00 51.32 68.20 -16.88 41.62 33.20 10.48 33.98 0.00 191 147 Peak	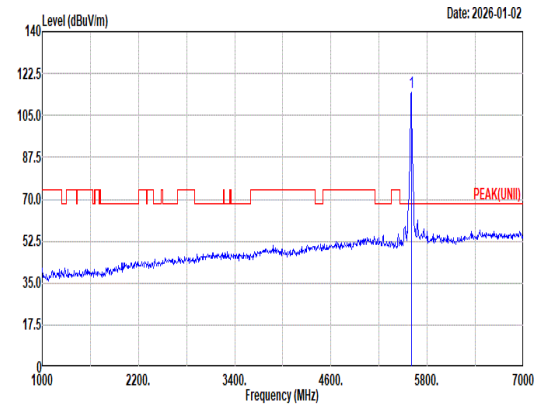 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5600.00 114.43 ------ ------ 104.43 33.30 10.69 33.99 0.00 191 147 Peak
Avg	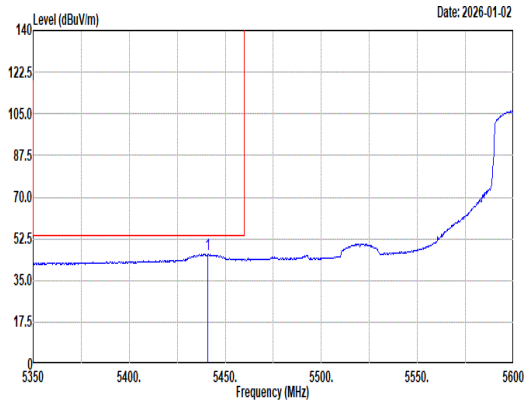 Site : 03CH23-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5441.00 45.87 54.00 -8.13 36.21 33.20 10.44 33.98 0.00 191 147 Average	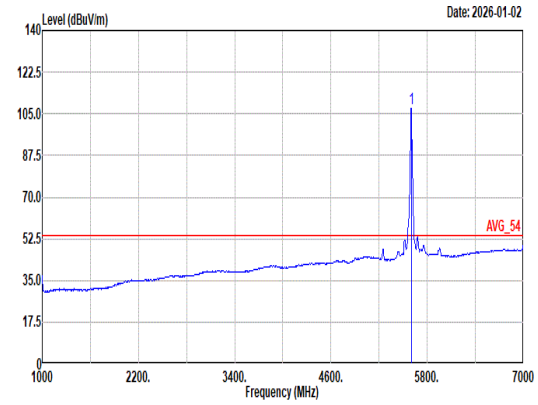 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5600.00 107.48 ------ ------ 97.48 33.30 10.69 33.99 0.00 191 147 Average

Mode	37	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_Full RU_5600MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	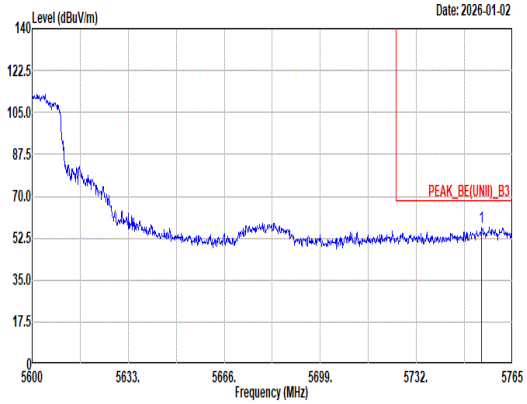 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5754.44 57.01 68.20 -11.19 46.35 33.93 10.75 34.02 0.00 191 147 Peak	Blank

Mode	37	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_Full RU_5600MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	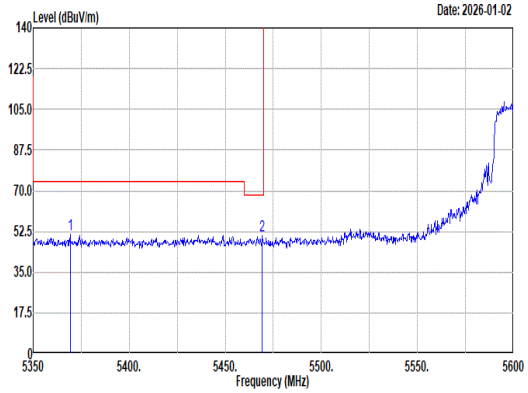 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5369.25 51.43 74.00 -22.57 41.92 33.14 10.35 33.98 0.00 300 101 Peak 2 5469.25 50.56 68.20 -17.64 40.86 33.20 10.48 33.98 0.00 300 101 Peak	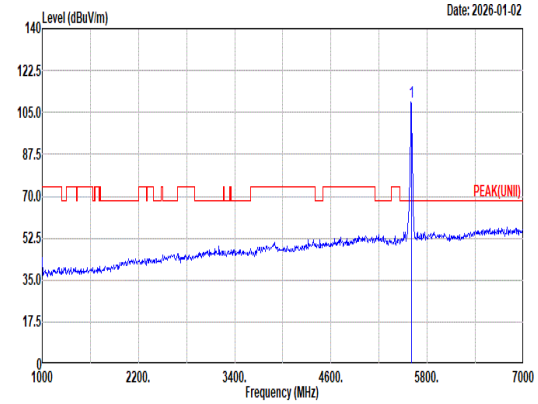 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5600.00 109.12 ------ ------ 99.13 33.30 10.68 33.99 0.00 300 101 Peak
Avg	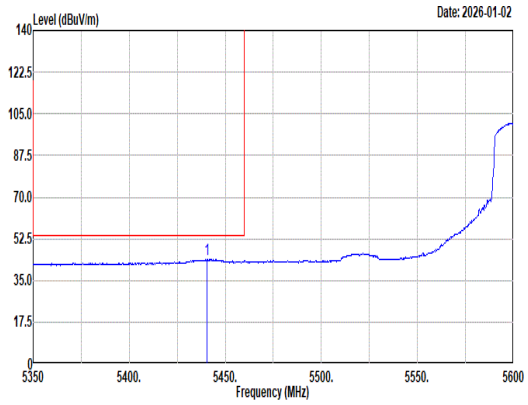 Site : 03CH23-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5440.50 43.82 54.00 -10.18 34.17 33.20 10.43 33.98 0.00 300 101 Average	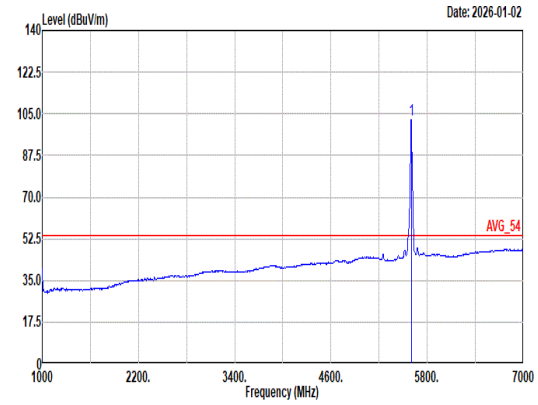 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5600.00 102.39 ------ ------ 92.40 33.30 10.68 33.99 0.00 300 101 Average

Mode	37	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_Full RU_5600MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	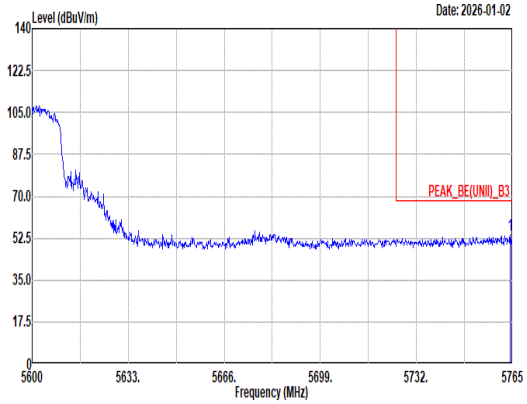 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5764.18 53.65 68.20 -14.55 42.92 33.99 10.76 34.02 0.00 300 101 Peak	Blank

Mode	37	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_Full RU_5600MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	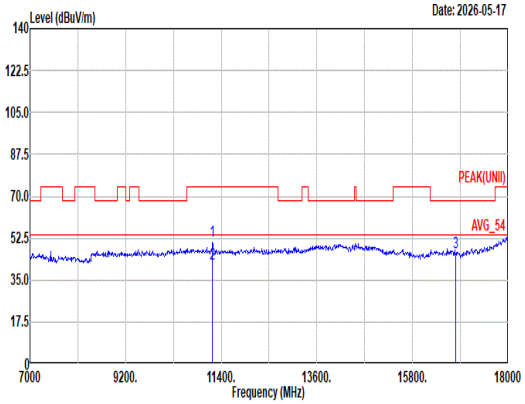 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11200.00 51.12 74.00 -22.88 49.91 39.00 16.61 55.00 0.60 100 52 Peak 2 11200.00 41.73 54.00 -12.27 40.52 39.00 16.61 55.00 0.60 100 52 Average 3 16800.00 46.53 68.20 -21.67 44.08 38.00 20.10 56.00 0.35 -- -- Peak	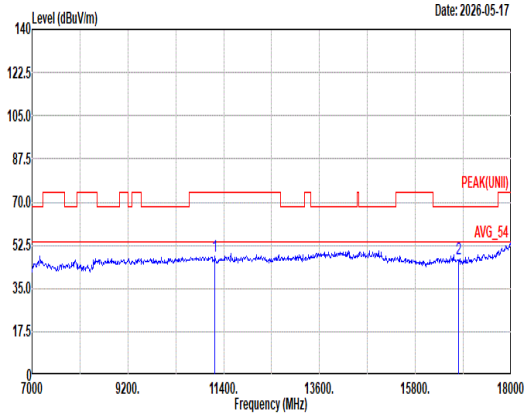 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11200.00 47.92 74.00 -26.08 46.71 39.00 16.61 55.00 0.60 -- -- Peak 2 16800.00 46.93 68.20 -21.27 44.48 38.00 20.10 56.00 0.35 -- -- Peak

Mode	37	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_Full RU_5600MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	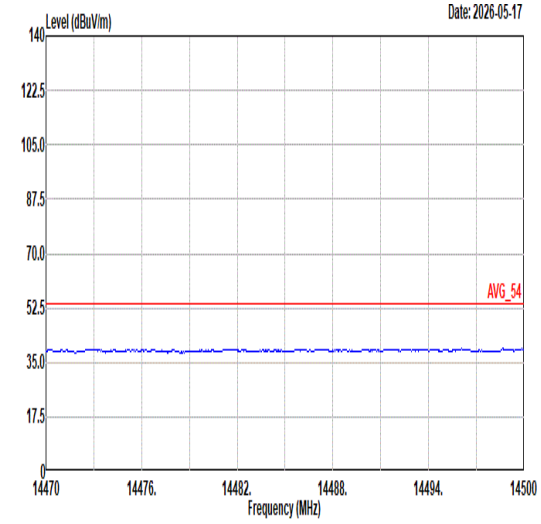 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	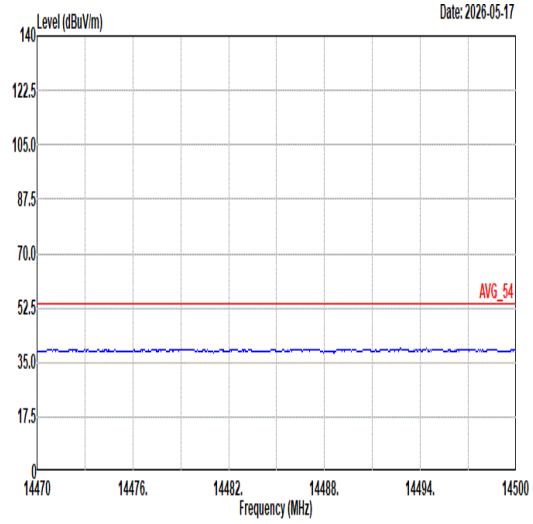 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	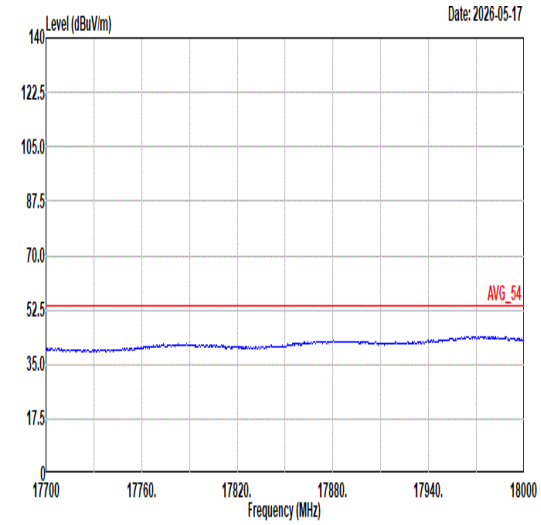 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	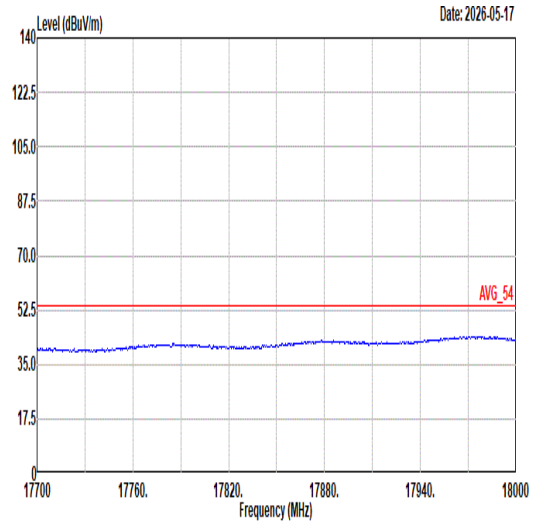 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	38	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	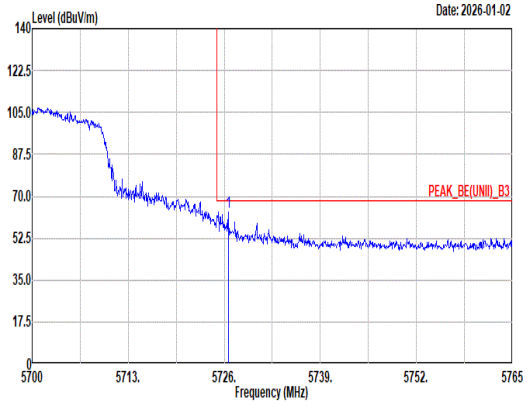 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.52 63.55 68.20 -4.65 53.01 33.81 10.74 34.01 0.00 400 147 Peak	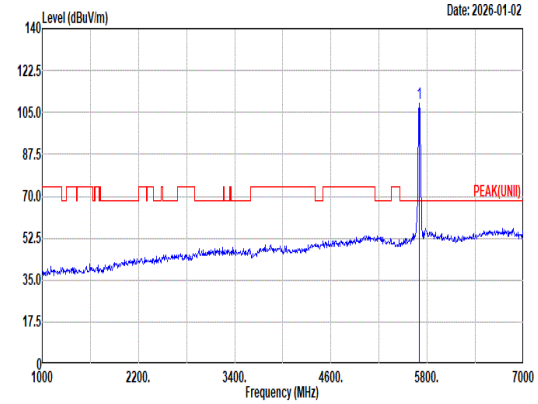 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 109.04 ------ ------ 98.60 33.72 10.73 34.01 0.00 400 147 Peak
Avg	Blank	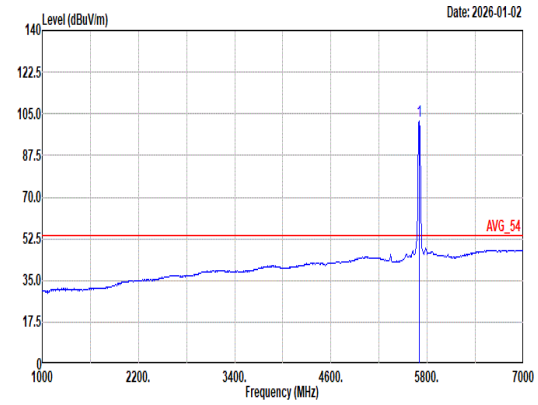 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 102.15 ------ ------ 91.74 33.69 10.73 34.01 0.00 400 147 Average

Mode	38	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	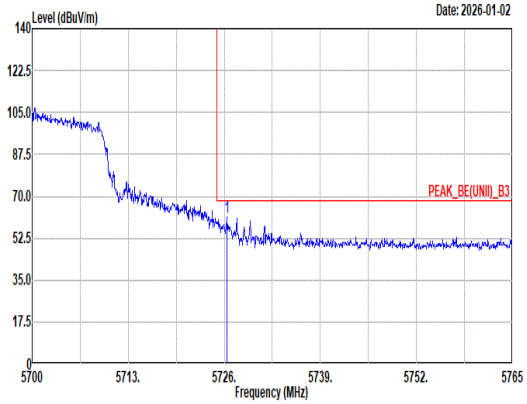 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.39 61.02 68.20 -7.18 50.48 33.81 10.74 34.01 0.00 307 91 Peak	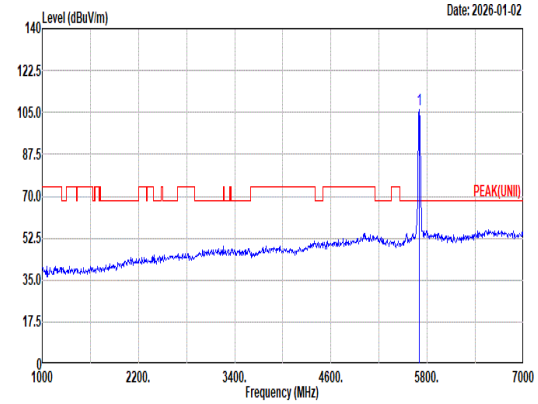 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 106.25 ------ ------ 95.84 33.69 10.73 34.01 0.00 307 91 Peak
Avg	Blank	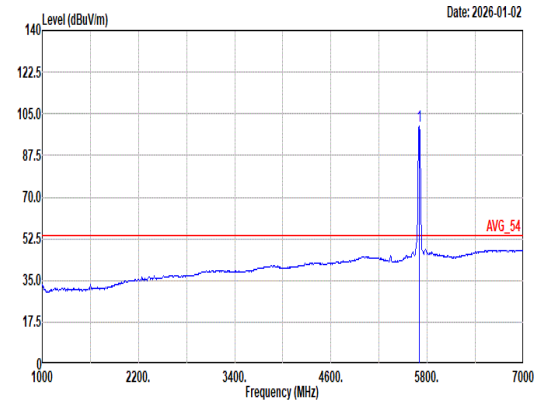 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 100.11 ------ ------ 89.70 33.69 10.73 34.01 0.00 307 91 Average

Mode	38	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	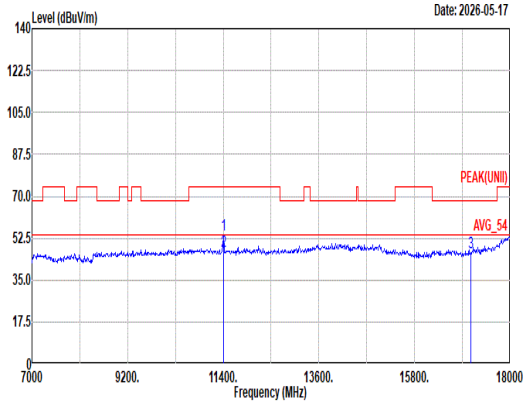 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL 1 11400.00 53.80 74.00 -20.20 52.12 39.20 16.75 54.87 0.60 100 35 Peak 2 11400.00 46.83 54.00 -7.17 45.15 39.20 16.75 54.87 0.60 100 35 Average 3 17100.00 46.54 68.20 -21.66 44.38 38.00 20.39 56.59 0.36 -- -- Peak	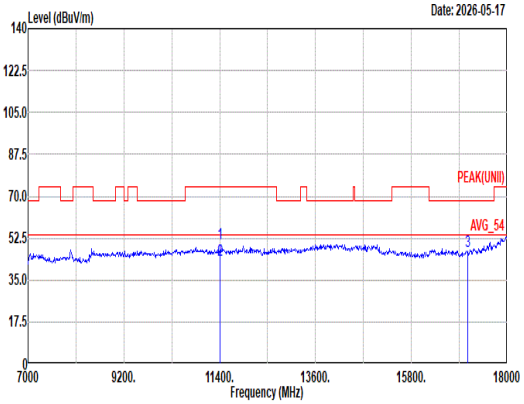 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL 1 11400.00 50.33 74.00 -23.67 48.65 39.20 16.75 54.87 0.60 100 93 Peak 2 11400.00 43.33 54.00 -10.67 41.65 39.20 16.75 54.87 0.60 100 93 Average 3 17100.00 46.81 68.20 -21.39 44.65 38.00 20.39 56.59 0.36 -- -- Peak

Mode	38	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	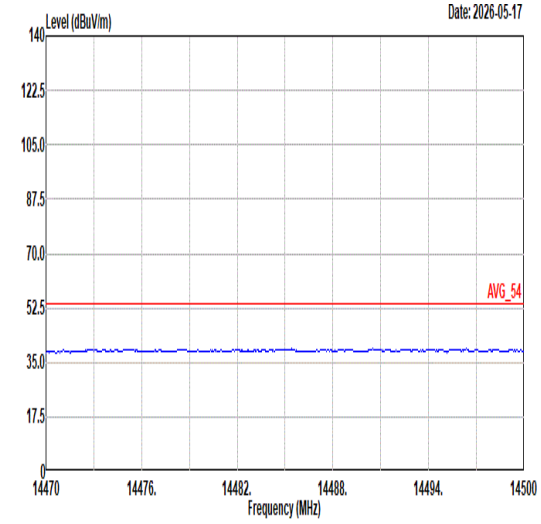 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	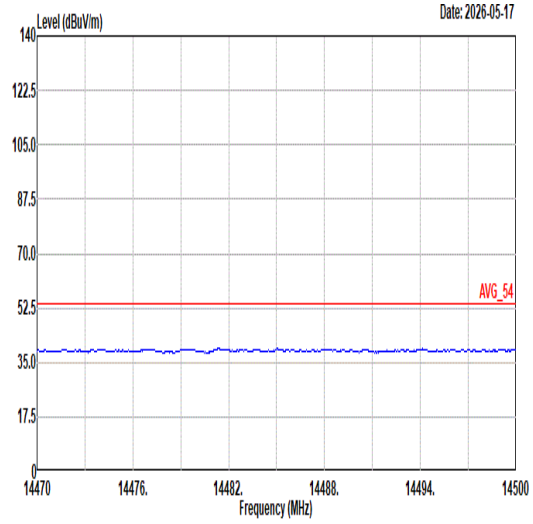 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	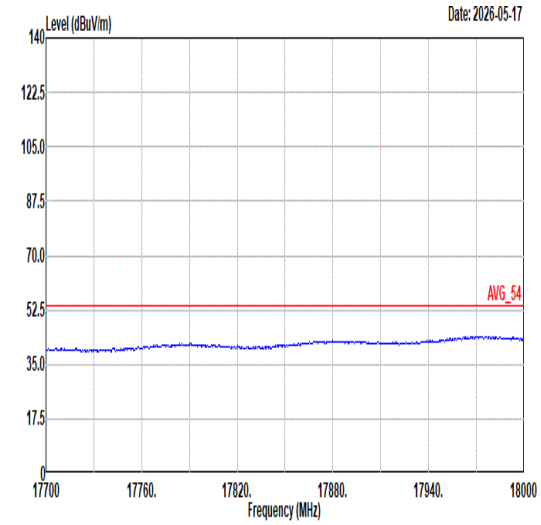 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	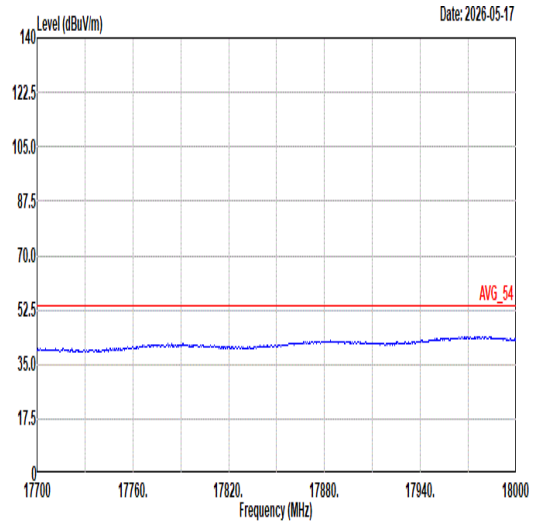 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	39	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	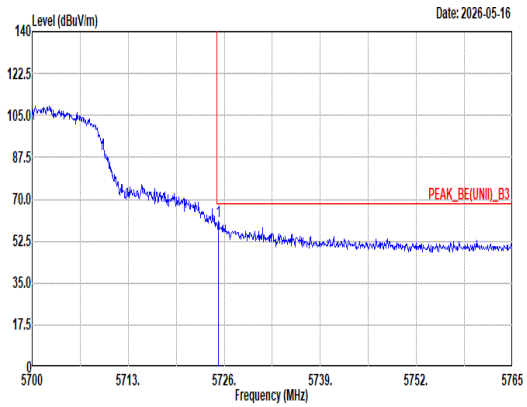 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5725.22 61.02 68.20 -7.18 50.08 33.80 10.74 33.60 0.00 400 61 Peak	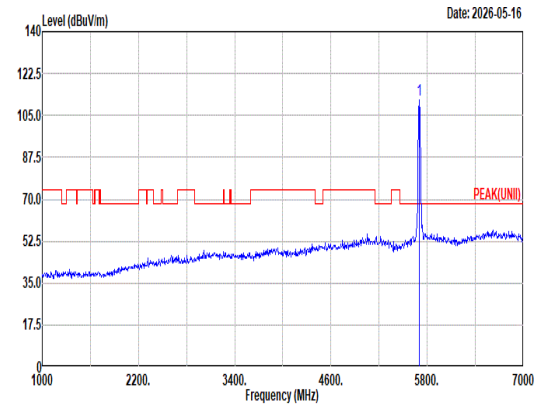 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5700.00 111.51 ------ ------ 100.65 33.72 10.73 33.59 0.00 400 61 Peak
Avg	Blank	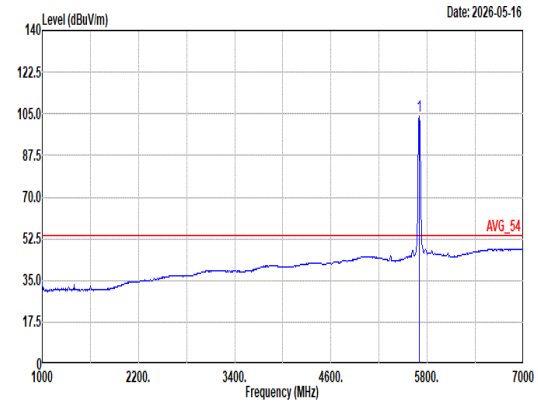 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto 1 5700.00 104.20 ------ ------ 93.34 33.72 10.73 33.59 0.00 400 61 Average

Mode	39	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	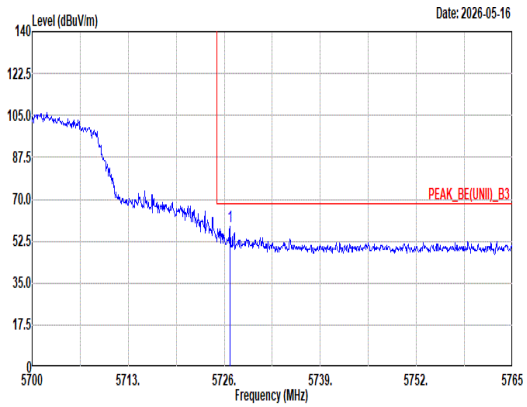 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.78 58.63 68.20 -9.57 47.68 33.81 10.74 33.60 0.00 385 360 Peak	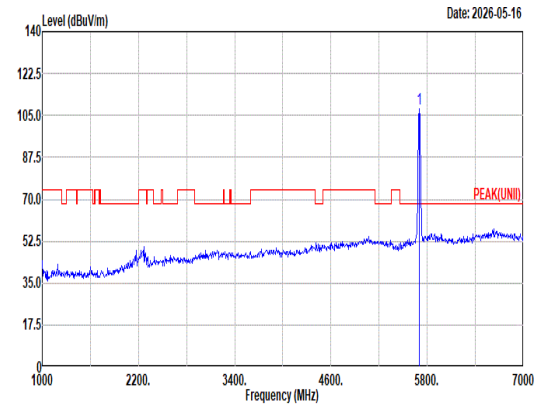 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 107.58 ------ ------ 96.72 33.72 10.73 33.59 0.00 385 360 Peak
Avg	Blank	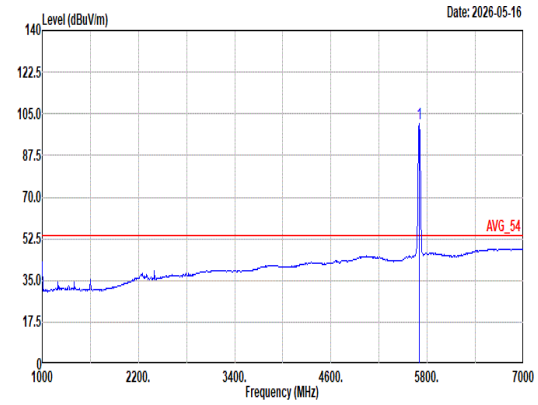 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 101.17 ------ ------ 90.31 33.72 10.73 33.59 0.00 385 360 Average

Mode	39	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	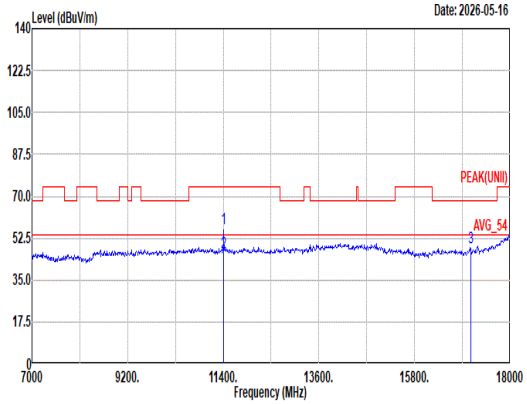 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11400.00 56.60 74.00 -17.40 54.92 39.20 16.75 54.87 0.60 100 22 Peak 2 11400.00 46.46 54.00 -7.54 44.78 39.20 16.75 54.87 0.60 100 22 Average 3 17100.00 48.35 68.20 -19.85 46.19 38.00 20.39 56.59 0.36 -- -- Peak	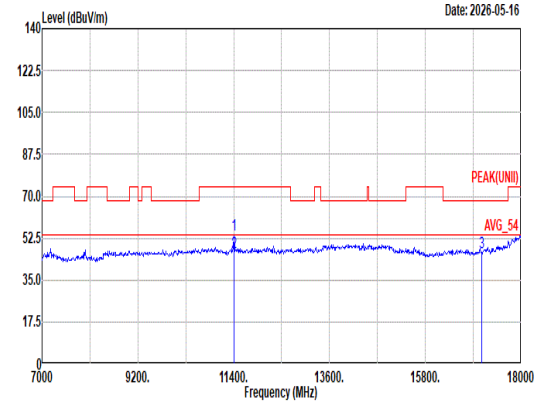 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11400.00 53.72 74.00 -20.28 52.04 39.20 16.75 54.87 0.60 193 58 Peak 2 11400.00 46.72 54.00 -7.28 45.04 39.20 16.75 54.87 0.60 193 58 Average 3 17100.00 46.74 68.20 -21.46 44.58 38.00 20.39 56.59 0.36 -- -- Peak

Mode	39	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	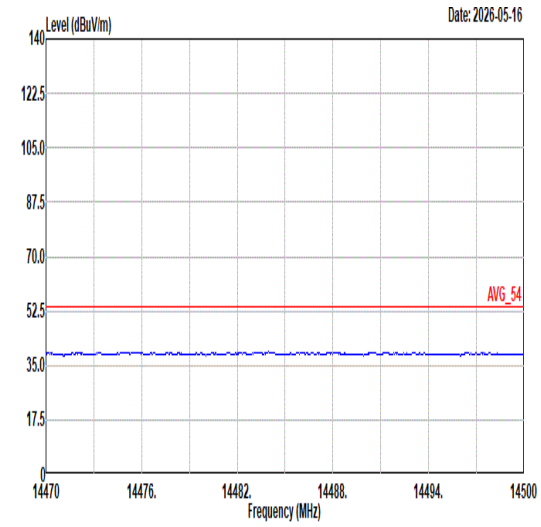 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	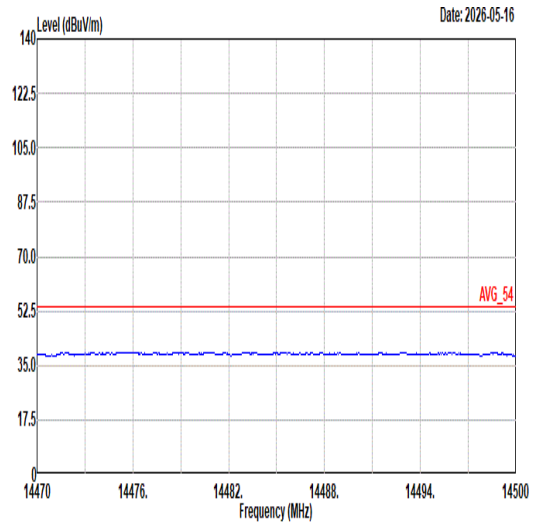 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	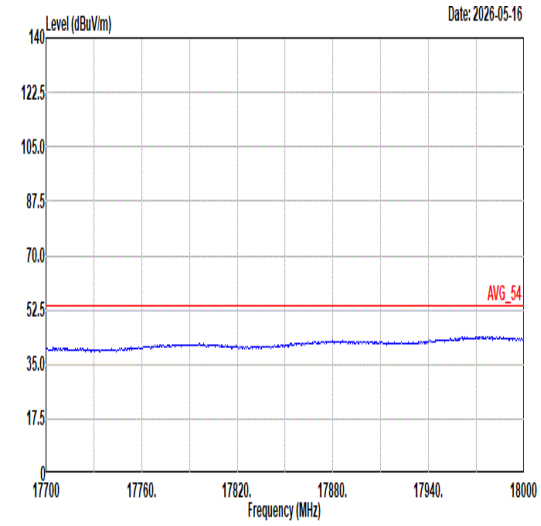 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	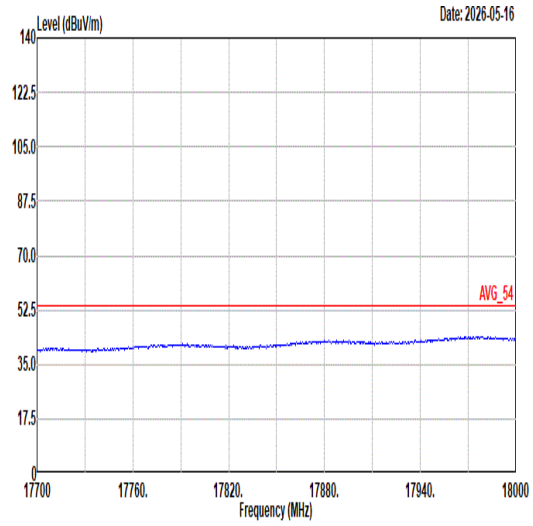 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	40	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_26/0 RU_5500MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	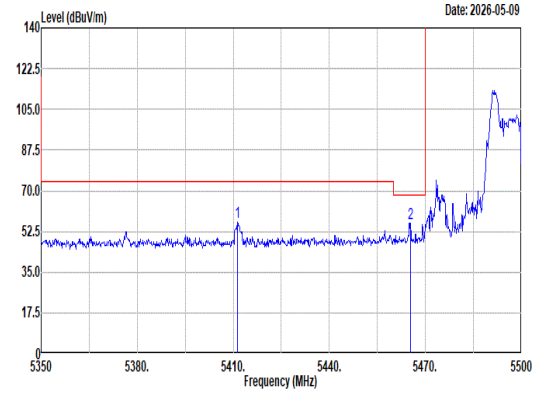 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5411.20 56.69 74.00 -17.31 46.68 33.20 10.39 33.58 0.00 100 253 Peak 2 5465.35 56.06 68.20 -12.14 45.96 33.20 10.47 33.57 0.00 100 253 Peak	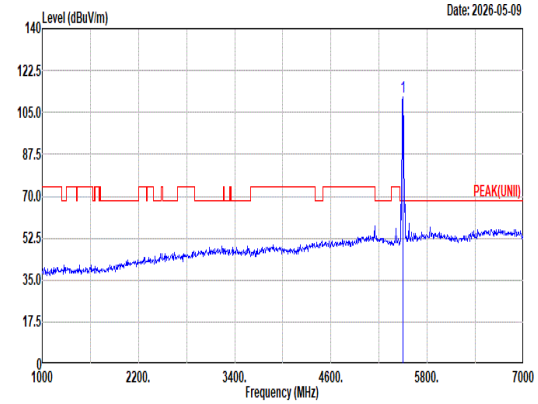 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 111.62 ------ ------ 101.46 33.20 10.52 33.56 0.00 100 253 Peak
Avg	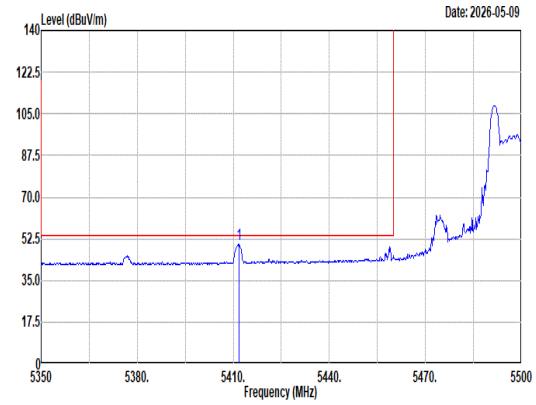 Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5411.80 49.98 54.00 -4.02 39.97 33.20 10.39 33.58 0.00 100 253 Average	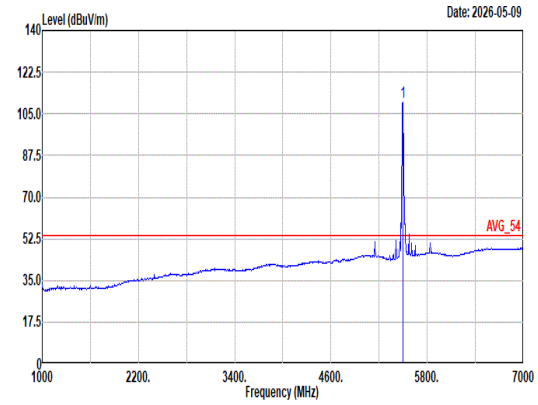 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 110.00 ------ ------ 99.84 33.20 10.52 33.56 0.00 100 253 Average

Mode	40	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_26/0 RU_5500MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	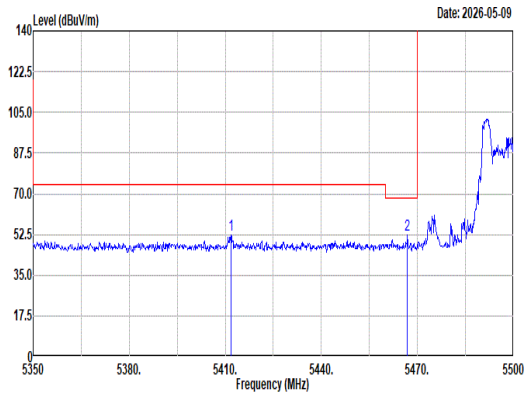 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5411.80 52.56 74.00 -21.44 42.55 33.20 10.39 33.58 0.00 384 160 Peak 2 5466.85 52.32 68.20 -15.88 42.21 33.20 10.48 33.57 0.00 384 160 Peak	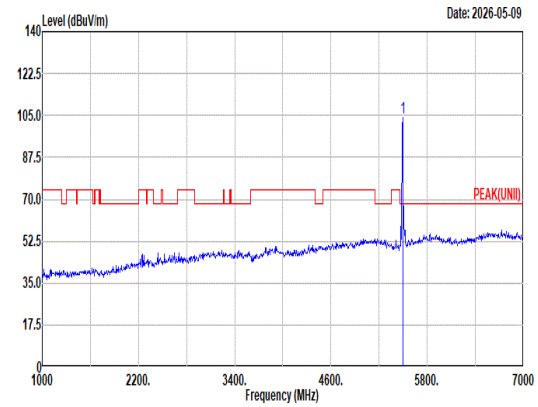 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 104.17 ------ ------ 94.01 33.20 10.52 33.56 0.00 384 160 Peak
Avg	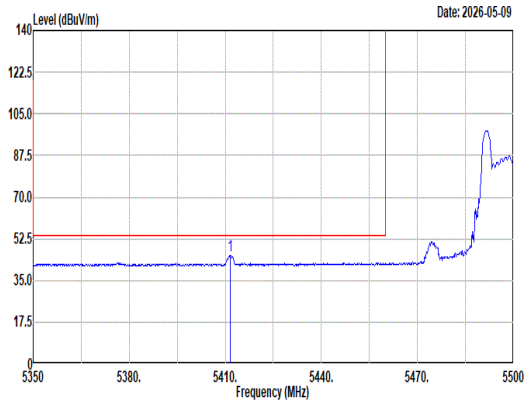 Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5411.65 45.54 54.00 -8.46 35.53 33.20 10.39 33.58 0.00 384 160 Average	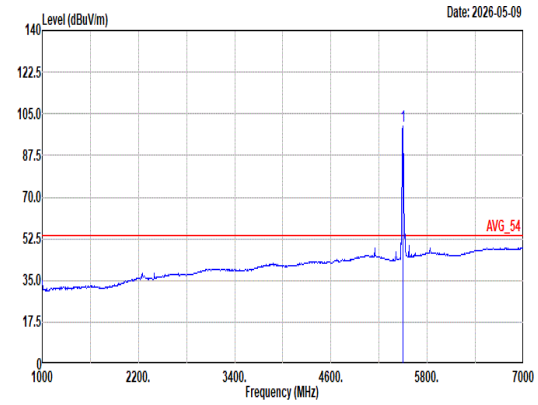 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 99.78 ------ ------ 89.62 33.20 10.52 33.56 0.00 384 160 Average

Mode	40	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_26/0 RU_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	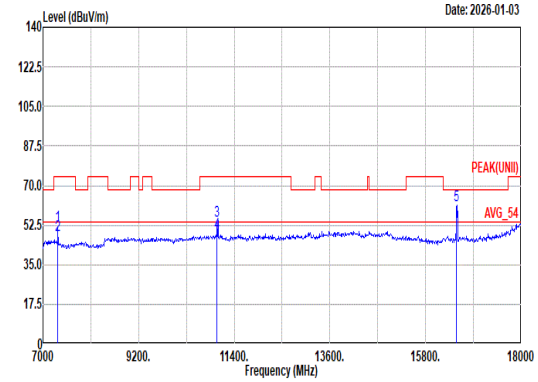 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7333.00 52.17 74.00 -21.83 57.64 37.10 13.42 56.45 0.46 400 152 Peak 2 7333.00 48.18 54.00 -5.82 53.65 37.10 13.42 56.45 0.46 400 152 Average 3 11000.00 54.34 74.00 -19.66 53.79 38.95 16.49 55.11 0.22 300 166 Peak 4 11000.00 49.26 54.00 -4.74 48.71 38.95 16.49 55.11 0.22 300 166 Average 5 16500.00 61.49 68.20 -6.71 58.57 38.30 19.81 55.33 0.14 -- -- Peak	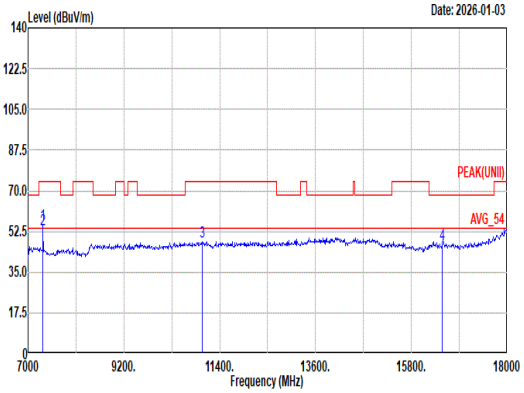 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7341.00 55.57 74.00 -18.43 61.04 37.10 13.42 56.45 0.46 100 172 Peak 2 7341.00 53.32 54.00 -0.68 58.79 37.10 13.42 56.45 0.46 100 172 Average 3 11000.00 47.92 74.00 -26.08 47.46 38.90 16.47 55.13 0.22 -- -- Peak 4 16500.00 46.80 68.20 -21.40 43.85 38.30 19.78 55.27 0.14 -- -- Peak

Mode	40	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_26/0 RU_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	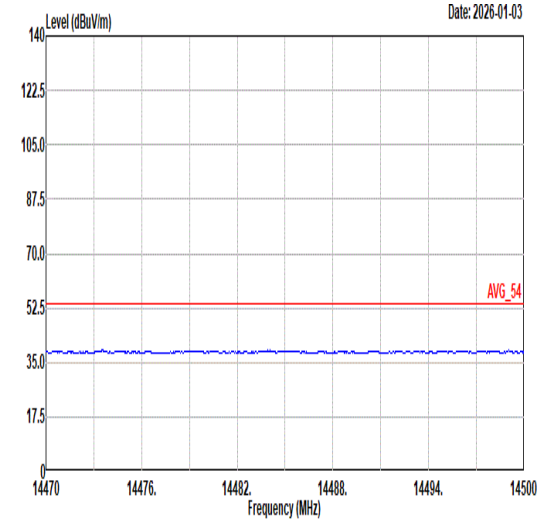 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	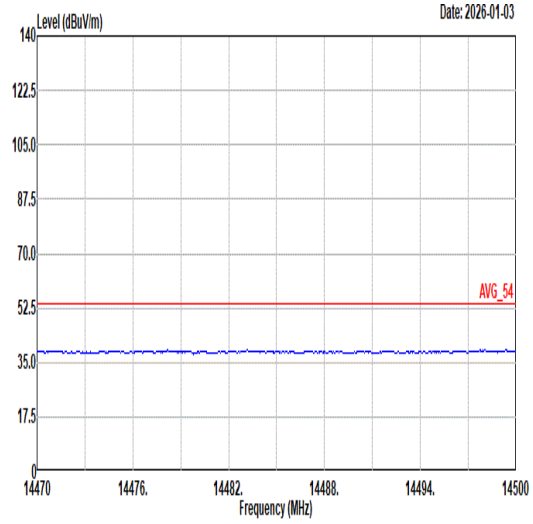 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	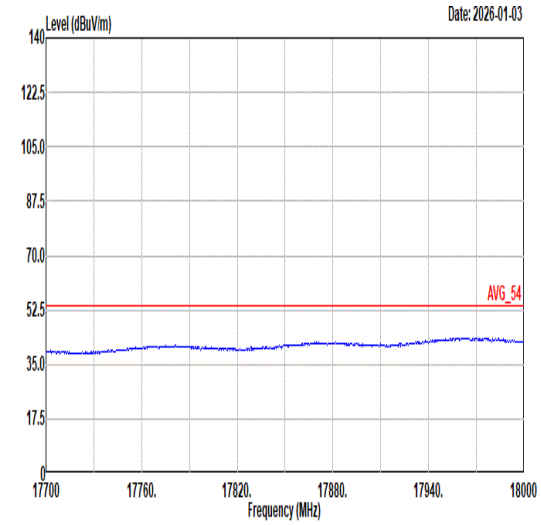 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	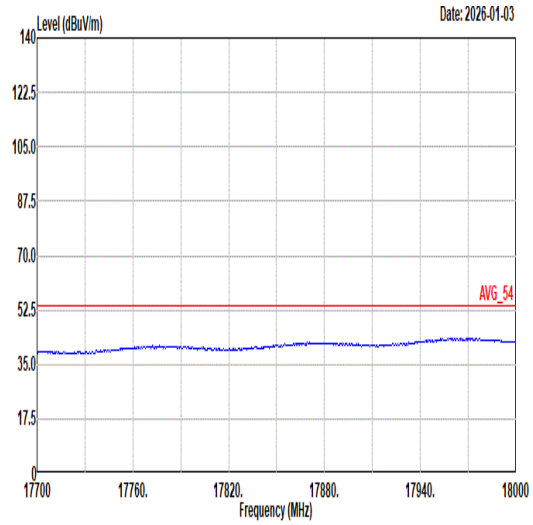 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	41	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_26/4 RU_5600MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	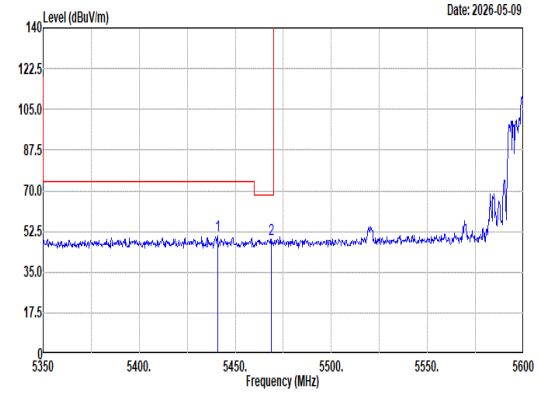 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5440.75 50.84 74.00 -23.16 40.77 33.20 10.44 33.57 0.00 102 251 Peak 2 5468.75 49.32 68.20 -18.88 39.21 33.20 10.48 33.57 0.00 102 251 Peak	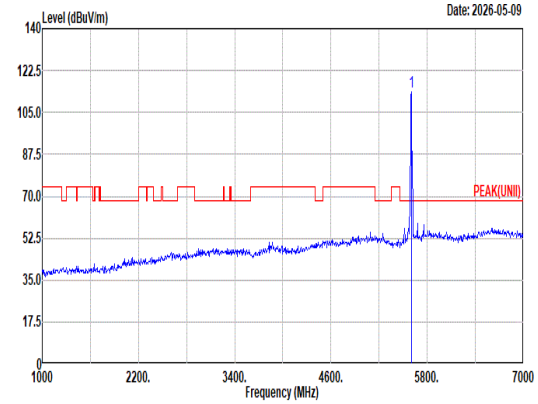 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5600.00 113.48 ------ ------ 103.07 33.30 10.69 33.58 0.00 102 251 Peak
Avg	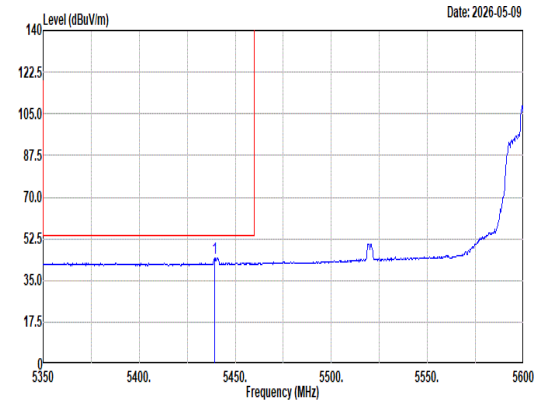 Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5439.25 44.28 54.00 -9.72 34.22 33.20 10.43 33.57 0.00 102 251 Average	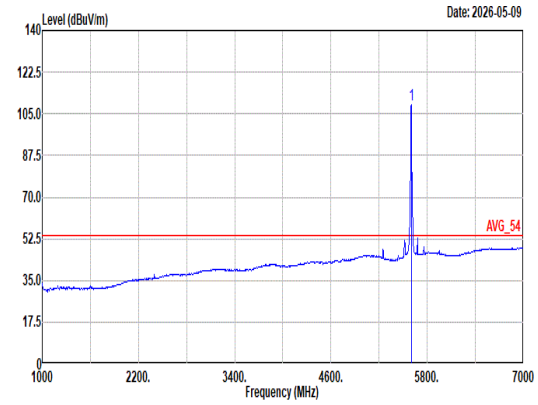 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5600.00 109.05 ------ ------ 98.64 33.30 10.69 33.58 0.00 102 251 Average

Mode	41	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_26/4 RU_5600MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	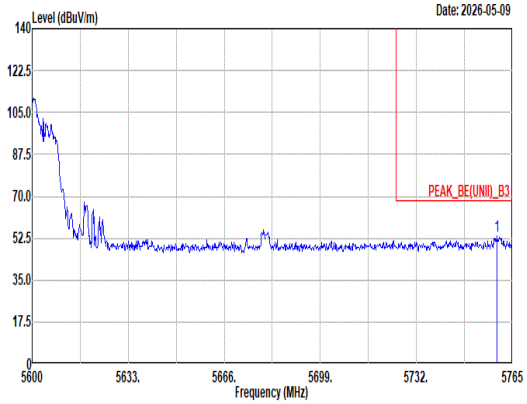 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5759.72 53.56 68.20 -14.64 42.45 33.96 10.75 33.60 0.00 102 251 Peak	Blank

Mode	41
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_26/4 RU_5600MHz
ANT	1

Pol.	Vertical	Fundamental
Peak	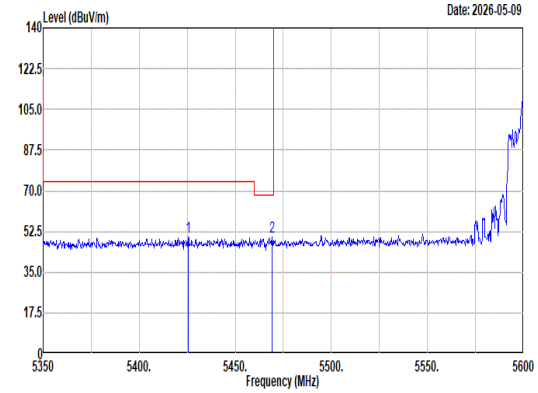 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5425.50 50.05 74.00 -23.95 40.02 33.20 10.41 33.58 0.00 397 146 Peak 2 5469.00 50.19 68.20 -18.01 40.08 33.20 10.48 33.57 0.00 397 146 Peak	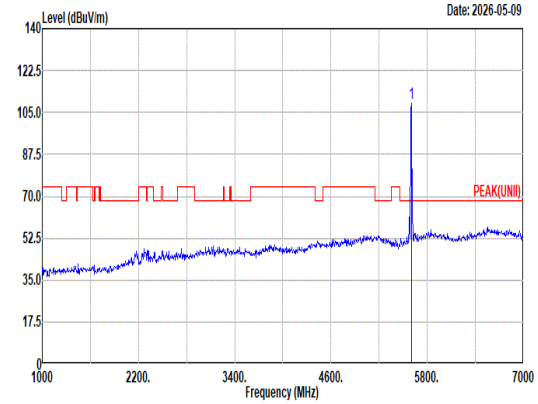 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5600.00 109.04 ------ ------ 98.63 33.30 10.69 33.58 0.00 397 146 Peak
Avg	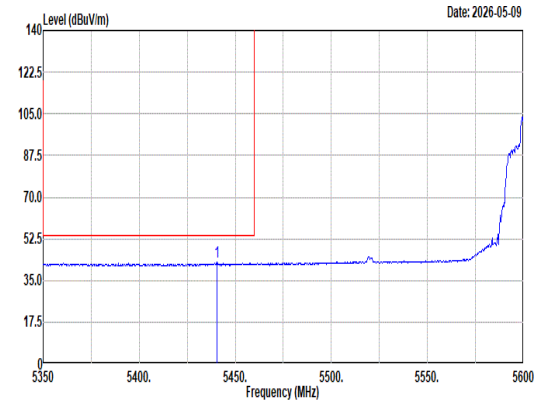 Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5440.50 42.67 54.00 -11.33 32.61 33.20 10.43 33.57 0.00 397 146 Average	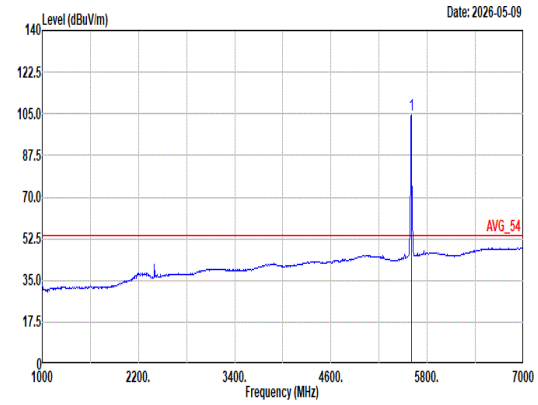 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5600.00 104.53 ------ ------ 94.12 33.30 10.69 33.58 0.00 397 146 Average

Mode	41	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_26/4 RU_5600MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	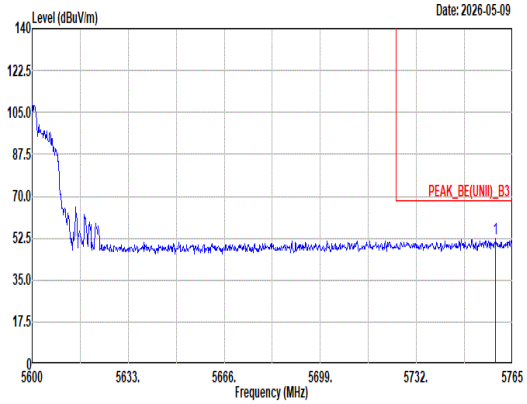 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5759.23 52.07 68.20 -16.13 40.96 33.96 10.75 33.60 0.00 397 146 Peak	Blank

Mode	41	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_26/4 RU_5600MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	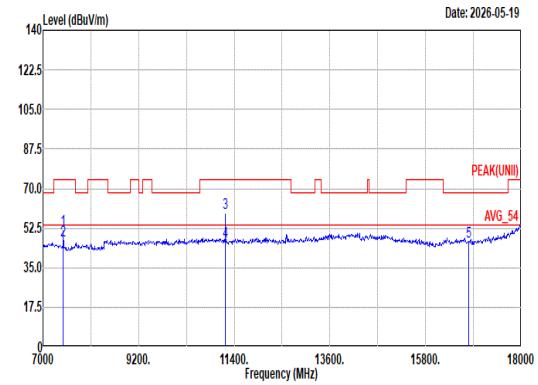 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7467.00 51.71 74.00 -22.29 57.11 36.67 13.54 56.50 0.89 400 37 Peak 2 7467.00 47.00 54.00 -7.00 52.40 36.67 13.54 56.50 0.89 400 37 Average 3 11200.00 59.07 74.00 -14.93 57.86 39.00 16.61 55.00 0.60 100 60 Peak 4 11200.00 46.74 54.00 -7.26 45.53 39.00 16.61 55.00 0.60 100 60 Average 5 16800.00 46.68 68.20 -21.52 44.23 38.00 20.10 56.00 0.35 -- -- Peak	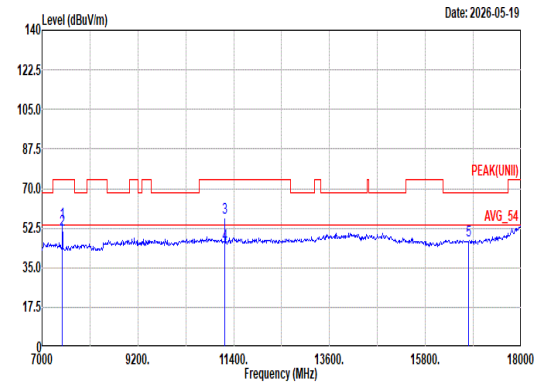 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7467.00 54.97 74.00 -19.03 60.37 36.67 13.54 56.50 0.89 339 174 Peak 2 7467.00 51.53 54.00 -2.47 56.93 36.67 13.54 56.50 0.89 339 174 Average 3 11200.00 57.08 74.00 -16.92 55.87 39.00 16.61 55.00 0.60 359 316 Peak 4 11200.00 45.24 54.00 -8.76 44.03 39.00 16.61 55.00 0.60 359 316 Average 5 16800.00 47.17 68.20 -21.03 44.72 38.00 20.10 56.00 0.35 -- -- Peak

Mode	41	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_26/4 RU_5600MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	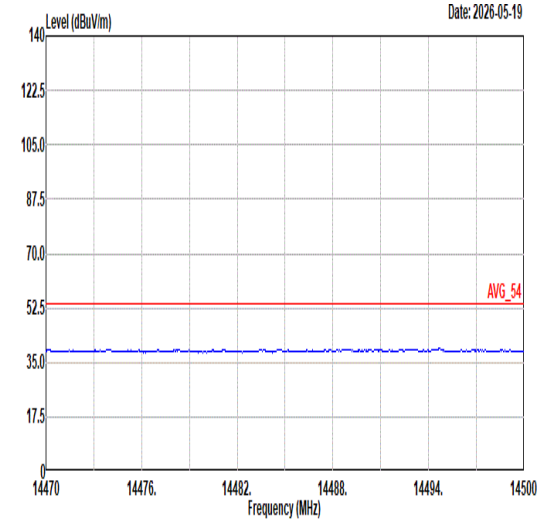 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	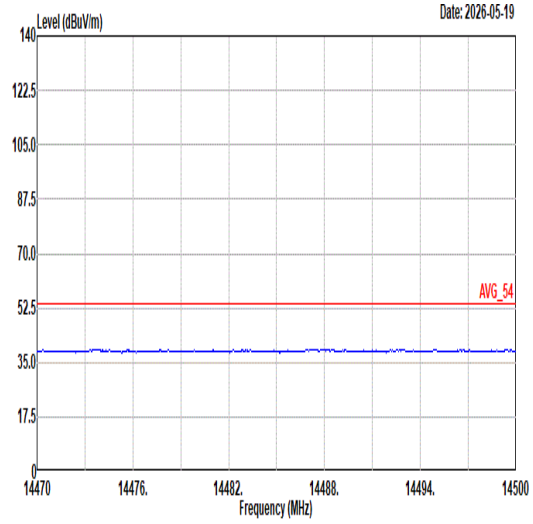 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	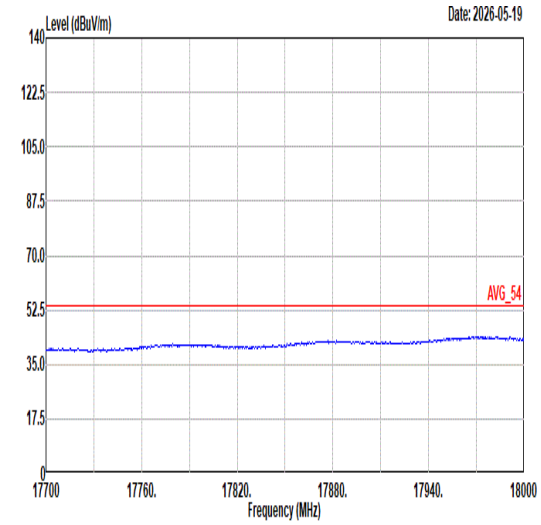 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	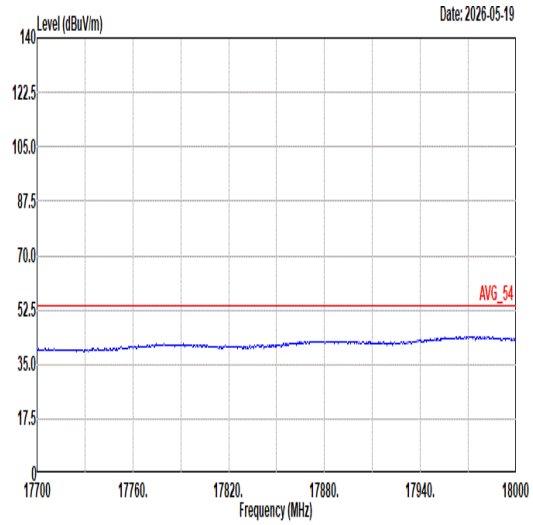 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	42	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_26/8 RU_5700MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	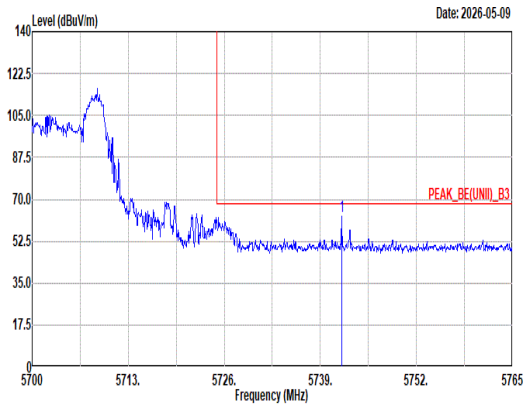 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5741.86 62.99 68.20 -5.21 51.97 33.87 10.75 33.60 0.00 100 264 Peak	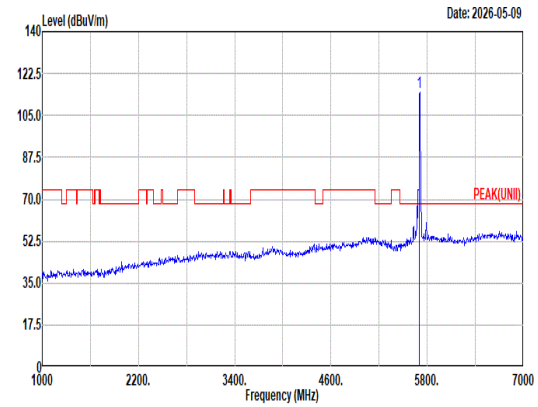 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 114.49 ------ ------ 103.61 33.74 10.73 33.59 0.00 100 264 Peak
Avg	Blank	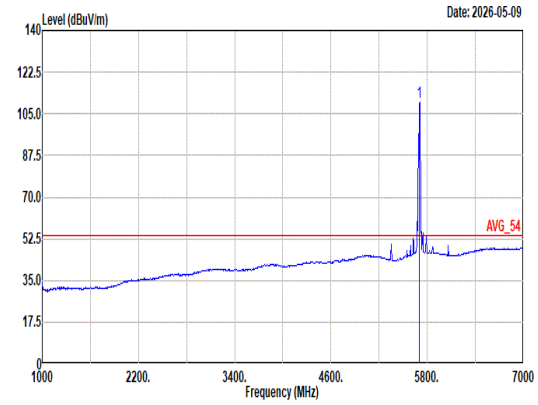 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 110.12 ------ ------ 99.24 33.74 10.73 33.59 0.00 100 264 Average

Mode	42	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_26/8 RU_5700MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	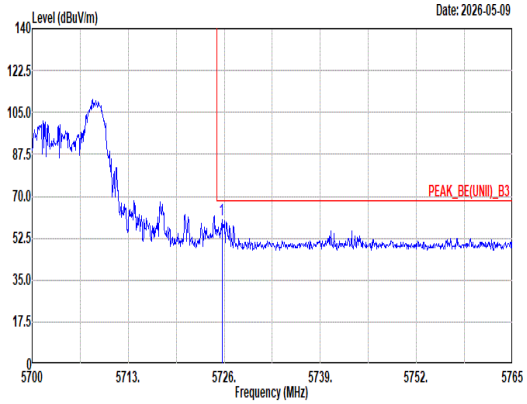 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5725.68 60.12 68.20 -8.08 49.18 33.80 10.74 33.60 0.00 400 159 Peak	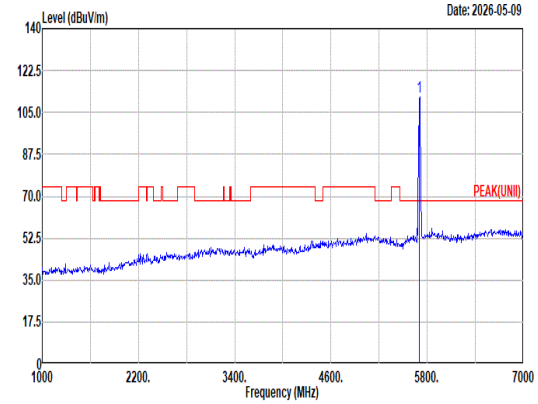 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 111.46 ------ ------ 100.58 33.74 10.73 33.59 0.00 400 159 Peak
Avg	Blank	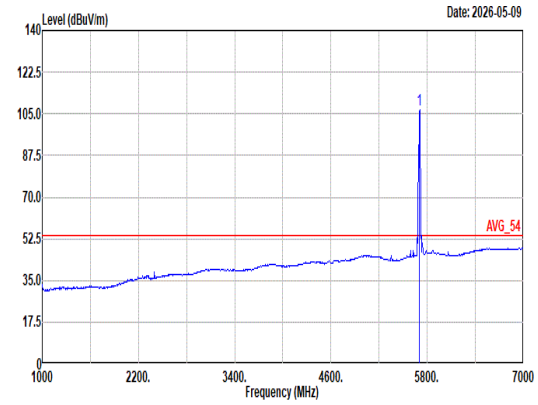 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 106.93 ------ ------ 96.05 33.74 10.73 33.59 0.00 400 159 Average

Mode	42	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_26/8 RU_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	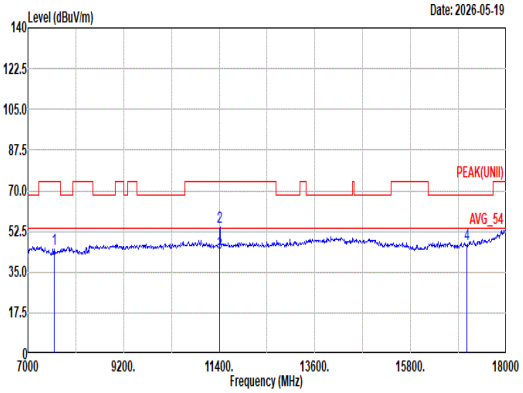 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL 1 7600.00 45.13 74.00 -28.87 50.64 36.42 13.65 56.48 0.90 -- -- Peak 2 11400.00 54.52 74.00 -19.48 52.84 39.20 16.75 54.87 0.60 100 58 Peak 3 11400.00 43.24 54.00 -10.76 41.56 39.20 16.75 54.87 0.60 100 58 Average 4 17100.00 47.06 68.20 -21.14 44.90 38.00 20.39 56.59 0.36 -- -- Peak	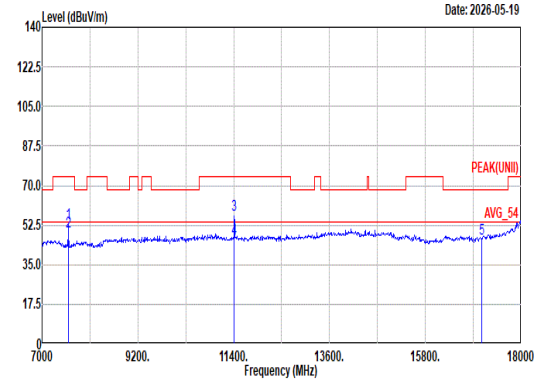 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL 1 7600.00 53.35 74.00 -20.65 58.89 36.40 13.65 56.49 0.90 400 179 Peak 2 7600.00 49.56 54.00 -4.44 55.10 36.40 13.65 56.49 0.90 400 179 Average 3 11400.00 56.94 74.00 -17.06 55.26 39.20 16.75 54.87 0.60 400 315 Peak 4 11400.00 46.65 54.00 -7.35 44.97 39.20 16.75 54.87 0.60 400 315 Average 5 17100.00 46.62 68.20 -21.58 44.46 38.00 20.39 56.59 0.36 -- -- Peak

Mode	42	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_26/8 RU_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	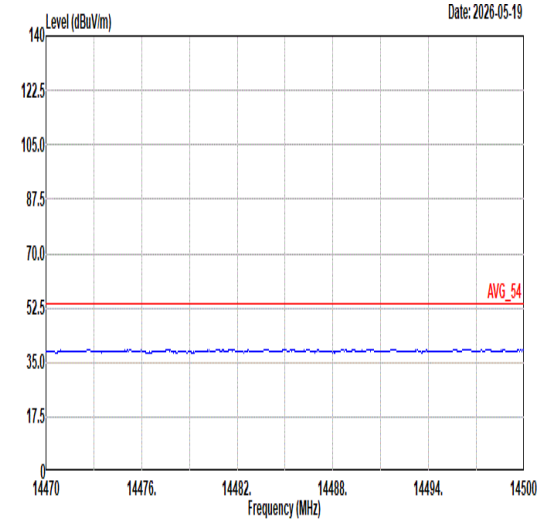 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	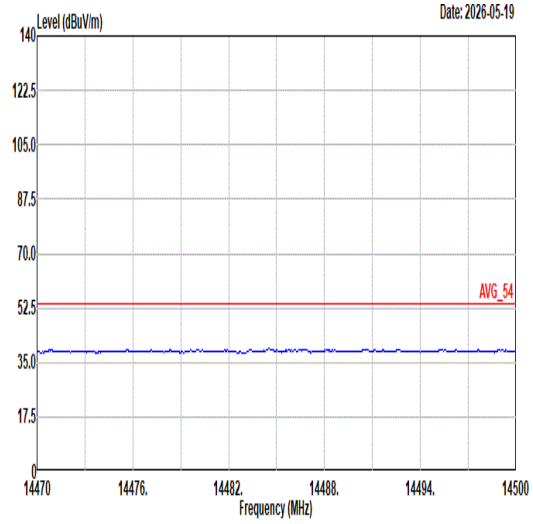 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	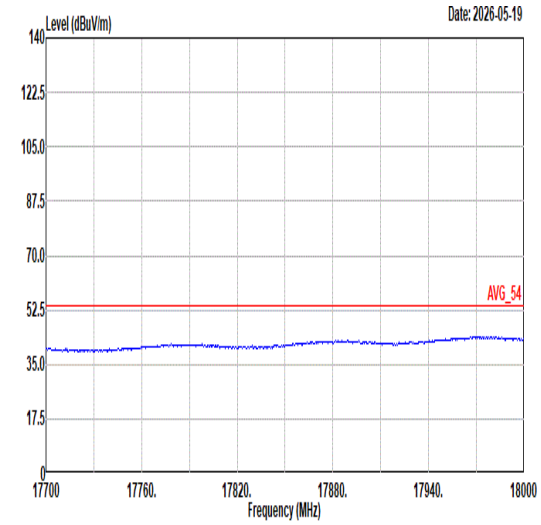 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	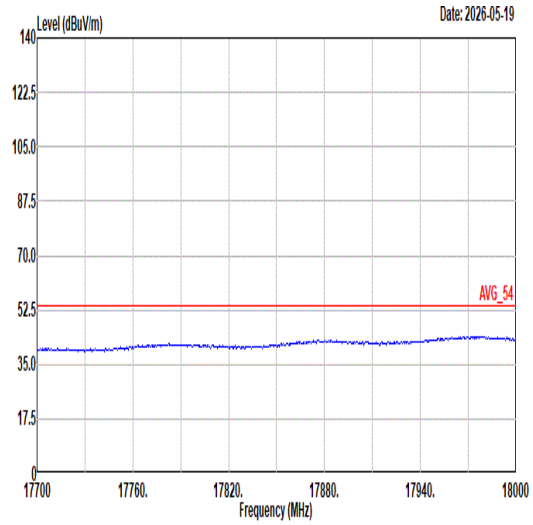 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	43	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_52/37 RU_5500MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	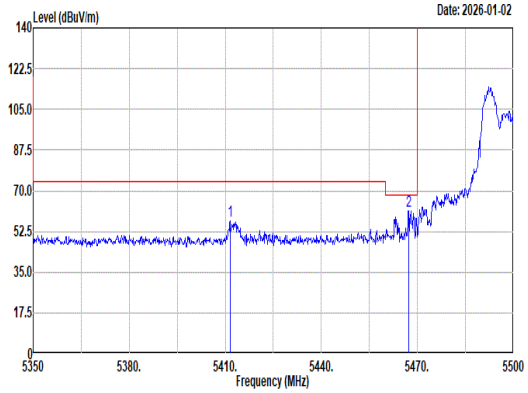 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5411.50 56.89 74.00 -17.11 47.28 33.20 10.39 33.98 0.00 195 149 Peak 2 5467.30 61.19 68.20 -7.01 51.49 33.20 10.48 33.98 0.00 195 149 Peak	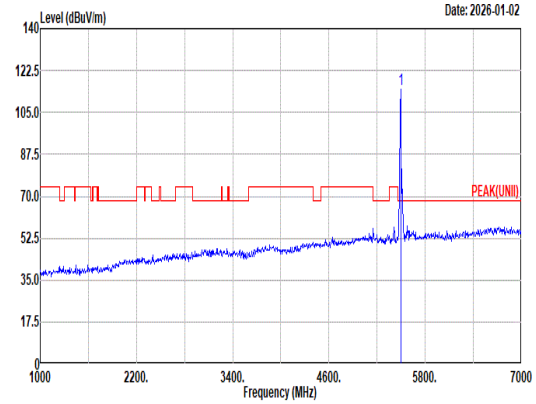 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 114.70 ------ ------ 104.96 33.20 10.52 33.98 0.00 195 149 Peak
Avg	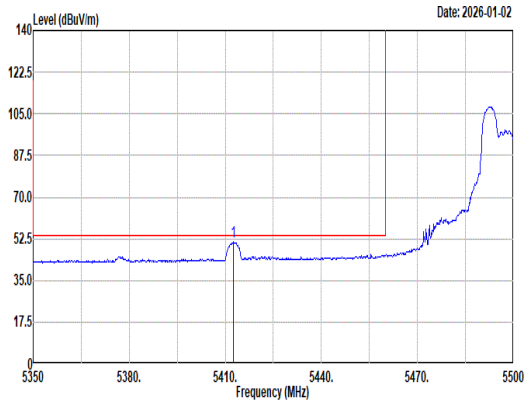 Site : 03CH23-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5412.55 51.13 54.00 -2.87 41.52 33.20 10.39 33.98 0.00 195 149 Average	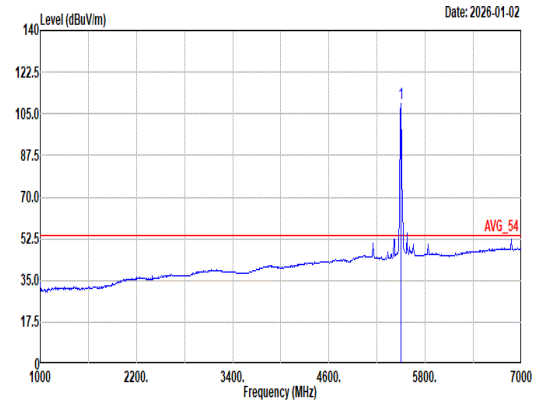 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 109.20 ------ ------ 99.46 33.20 10.52 33.98 0.00 195 149 Average

Mode	43	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_52/37 RU_5500MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	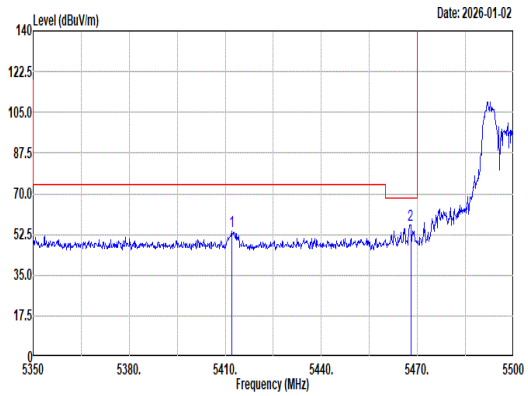 Site : 03CH23-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5411.95 53.83 74.00 -20.17 44.22 33.20 10.39 33.98 0.00 387 90 Peak 2 5467.90 56.68 68.20 -11.52 46.98 33.20 10.48 33.98 0.00 387 90 Peak	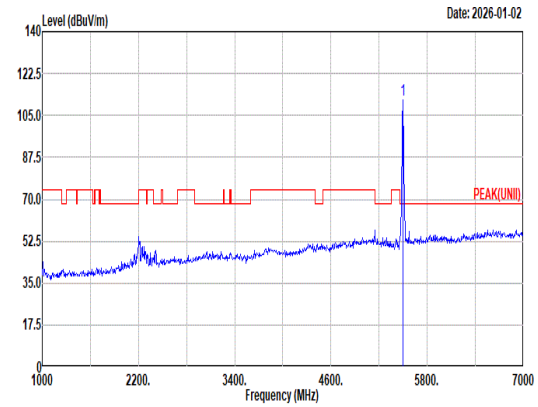 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 111.43 ------ ------ 101.69 33.20 10.52 33.98 0.00 387 90 Peak
Avg	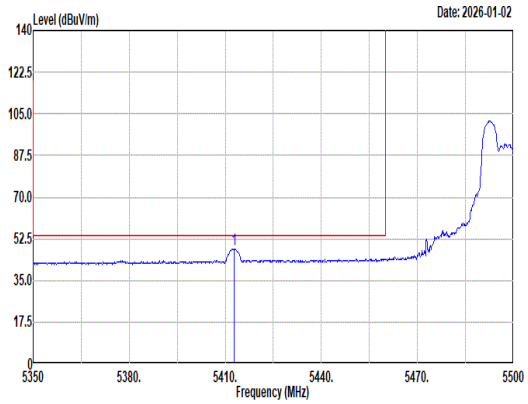 Site : 03CH23-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5412.70 48.24 54.00 -5.76 38.63 33.20 10.39 33.98 0.00 387 90 Average	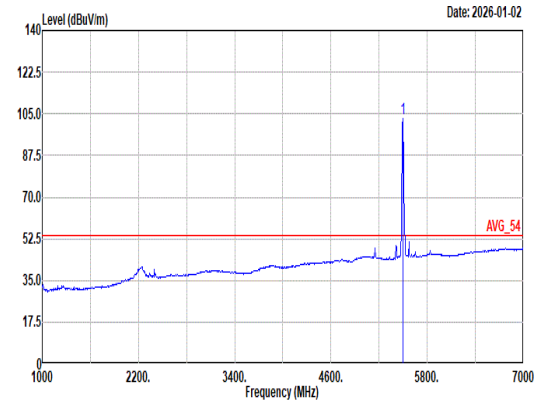 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 103.20 ------ ------ 93.46 33.20 10.52 33.98 0.00 387 90 Average

Mode	43	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_52/37 RU_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	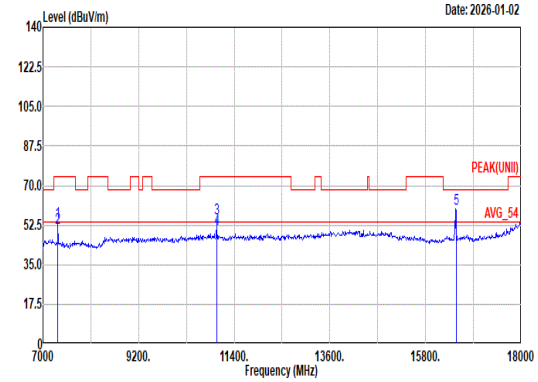 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7333.00 53.77 74.00 -20.23 59.24 37.10 13.42 56.45 0.46 382 123 Peak 2 7333.00 51.12 54.00 -2.88 56.59 37.10 13.42 56.45 0.46 382 123 Average 3 11000.00 55.58 74.00 -18.42 55.12 38.90 16.47 55.13 0.22 249 179 Peak 4 11000.00 50.70 54.00 -3.30 50.24 38.90 16.47 55.13 0.22 249 179 Average 5 16500.00 59.82 68.20 -8.38 56.88 38.30 19.77 55.27 0.14 -- -- Peak	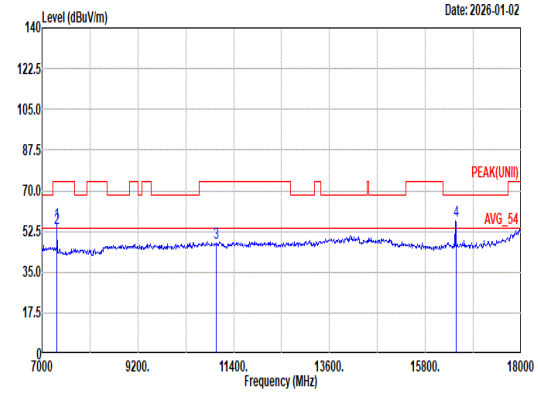 Site : 03CH23-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7333.00 56.13 74.00 -17.87 61.60 37.10 13.42 56.45 0.46 100 176 Peak 2 7333.00 53.92 54.00 -0.08 59.39 37.10 13.42 56.45 0.46 100 176 Average 3 11000.00 47.39 74.00 -26.61 46.93 38.90 16.47 55.13 0.22 -- -- Peak 4 16500.00 56.98 68.20 -11.22 54.03 38.30 19.78 55.27 0.14 -- -- Peak

Mode	43	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_52/37 RU_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	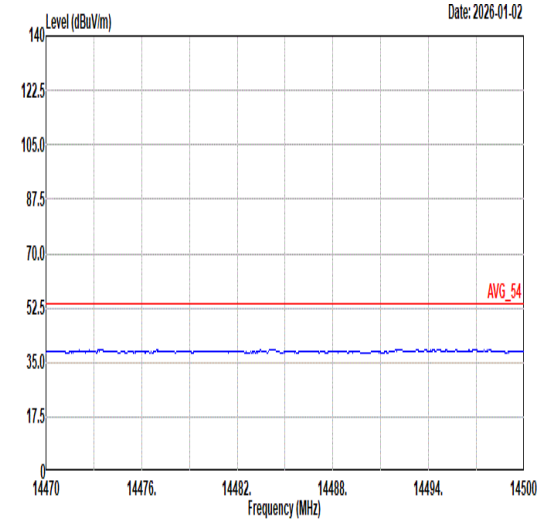 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	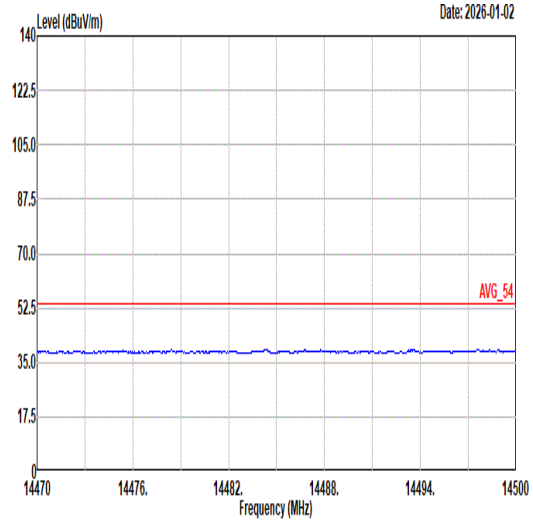 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	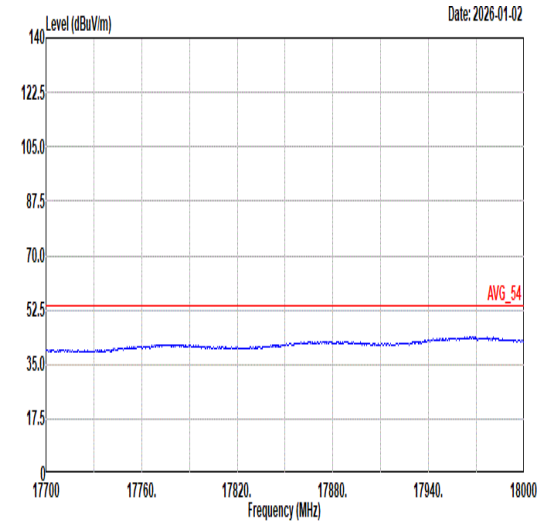 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	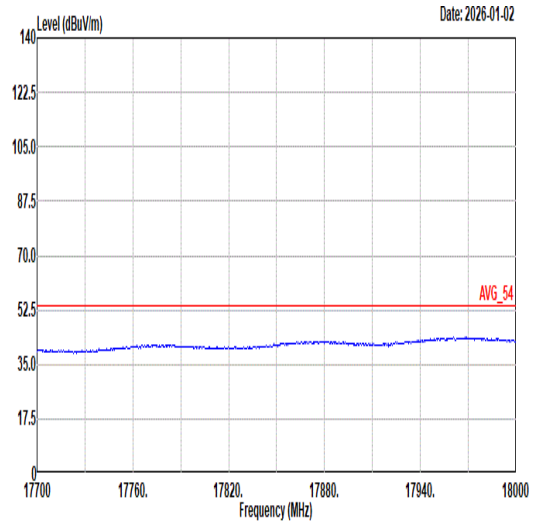 Site : 03CH23-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	44
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_52/38 RU_5600MHz
ANT	1

Pol.	Horizontal	Fundamental
Peak	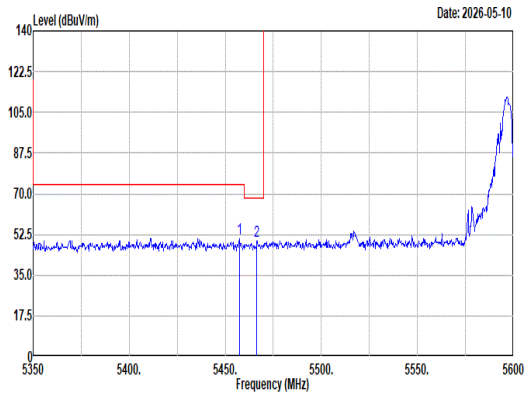 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.50 50.91 74.00 -23.09 40.82 33.20 10.46 33.57 0.00 100 271 Peak 2 5466.50 49.63 68.20 -18.57 39.52 33.20 10.48 33.57 0.00 100 271 Peak	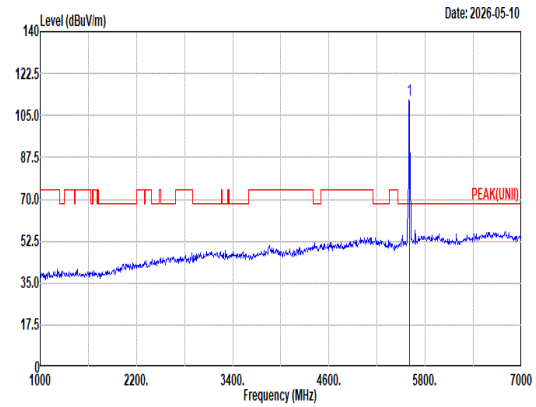 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5600.00 111.22 ------ ------ 100.82 33.30 10.68 33.58 0.00 100 271 Peak
Avg	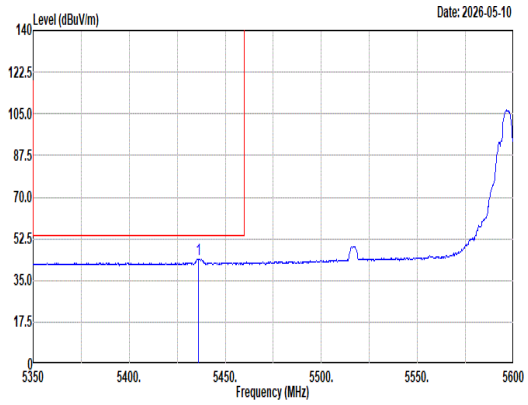 Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5436.00 44.03 54.00 -9.97 33.97 33.20 10.43 33.57 0.00 100 271 Average	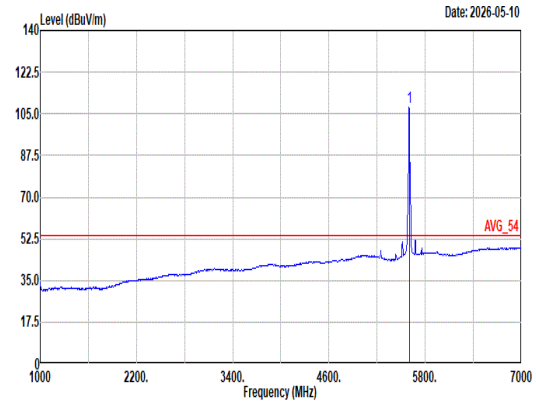 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5600.00 108.02 ------ ------ 97.62 33.30 10.68 33.58 0.00 100 271 Average

Mode	44	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_52/38 RU_5600MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	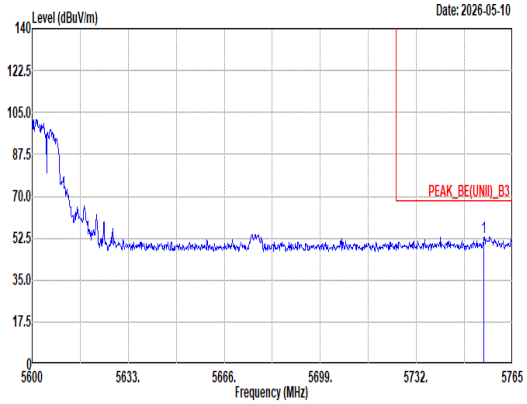 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.27 52.81 68.20 -15.39 41.73 33.93 10.75 33.60 0.00 100 271 Peak	Blank

Mode	44
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_52/38 RU_5600MHz
ANT	1

Pol.	Vertical	Fundamental
Peak	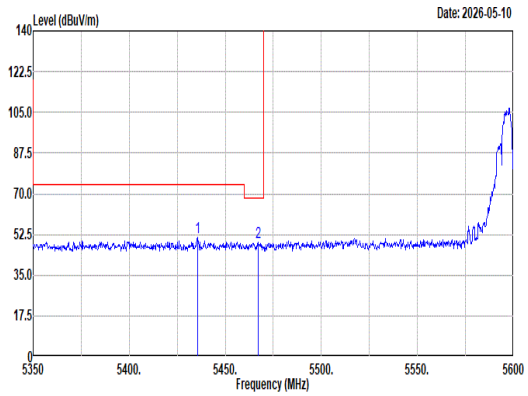 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5435.50 51.13 74.00 -22.87 41.07 33.20 10.43 33.57 0.00 394 168 Peak 2 5467.00 49.00 68.20 -19.20 38.89 33.20 10.48 33.57 0.00 394 168 Peak	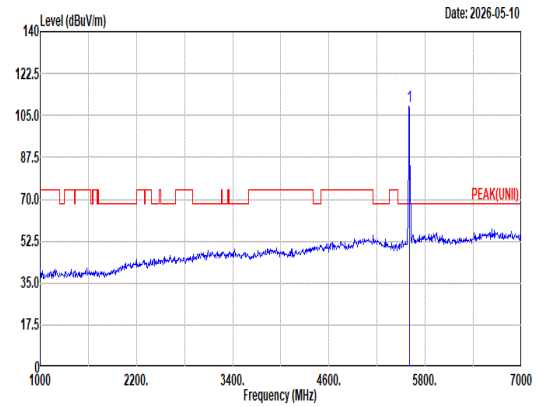 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5600.00 108.61 ------ ------ 98.21 33.30 10.68 33.58 0.00 394 168 Peak
Avg	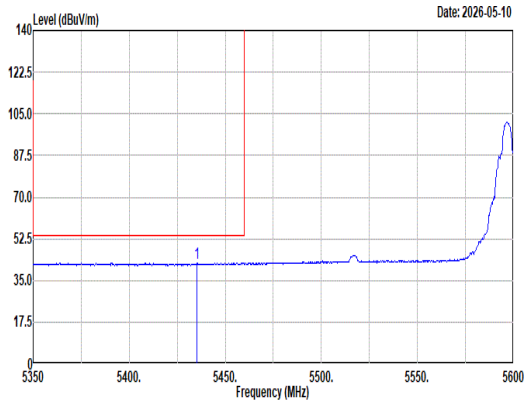 Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5435.25 42.37 54.00 -11.63 32.31 33.20 10.43 33.57 0.00 394 168 Average	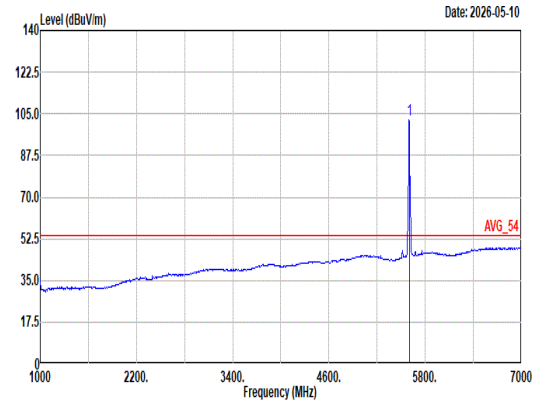 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5600.00 102.75 ------ ------ 92.35 33.30 10.68 33.58 0.00 394 168 Average

Mode	44	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_52/38 RU_5600MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	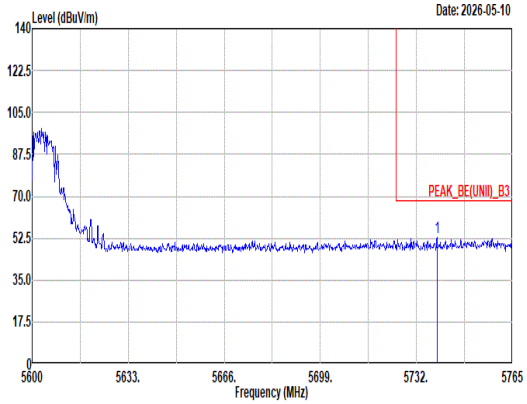 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5739.10 52.80 68.20 -15.40 41.79 33.86 10.75 33.60 0.00 394 168 Peak	Blank

Mode	44	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_52/38 RU_5600MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	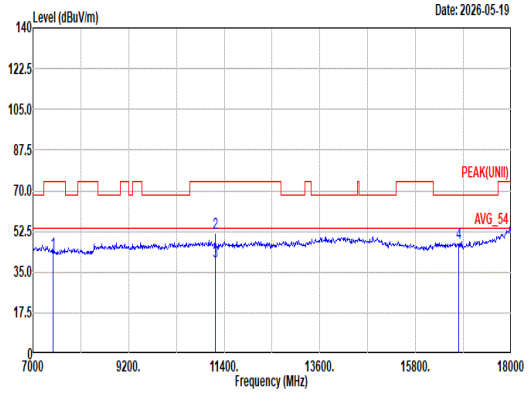 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7467.00 43.50 74.00 -30.50 48.90 36.68 13.53 56.50 0.89 -- -- Peak 2 11200.00 51.52 74.00 -22.48 50.31 39.00 16.61 55.00 0.60 100 61 Peak 3 11200.00 39.50 54.00 -14.50 38.29 39.00 16.61 55.00 0.60 100 61 Average 4 16800.00 47.35 68.20 -20.85 44.90 38.00 20.10 56.00 0.35 -- -- Peak	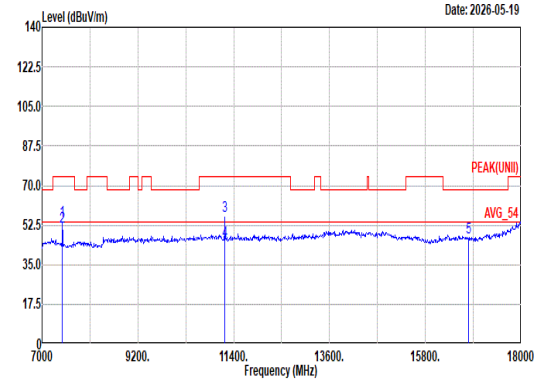 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7467.00 54.66 74.00 -19.34 60.06 36.67 13.54 56.50 0.89 355 179 Peak 2 7467.00 51.62 54.00 -2.38 57.02 36.67 13.54 56.50 0.89 355 179 Average 3 11200.00 56.28 74.00 -17.72 55.07 39.00 16.61 55.00 0.60 394 311 Peak 4 11200.00 45.29 54.00 -8.71 44.08 39.00 16.61 55.00 0.60 394 311 Average 5 16800.00 47.08 68.20 -21.12 44.63 38.00 20.10 56.00 0.35 -- -- Peak

Mode	44	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_52/38 RU_5600MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	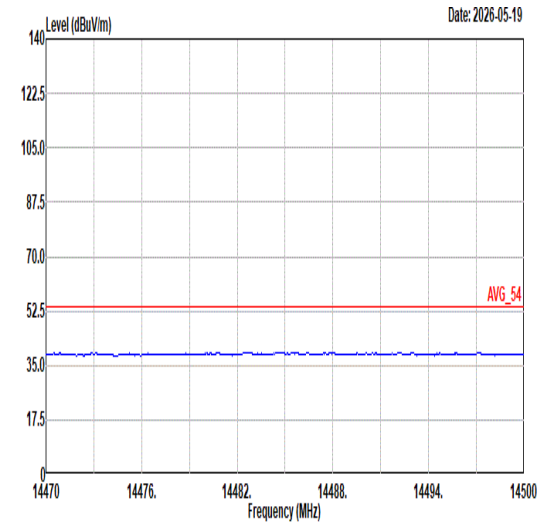 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	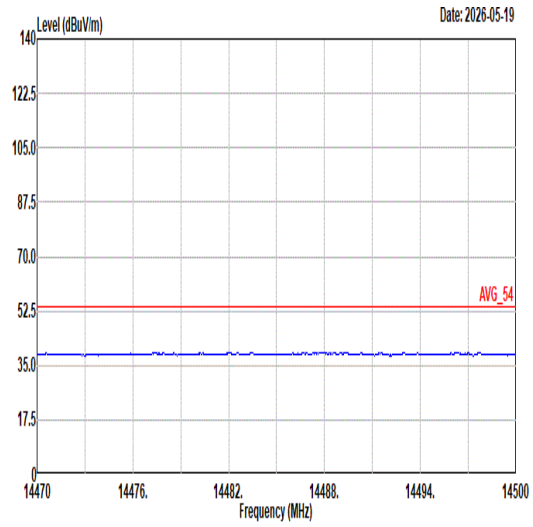 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	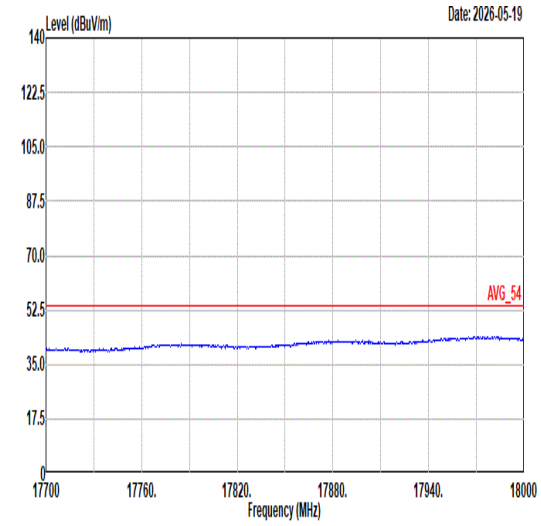 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	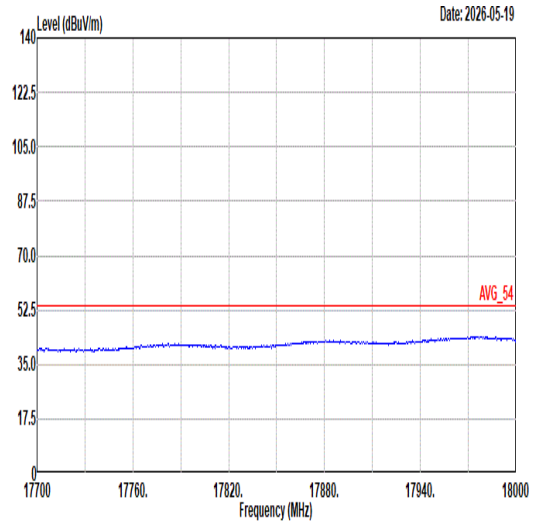 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	45	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_52/40 RU_5700MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	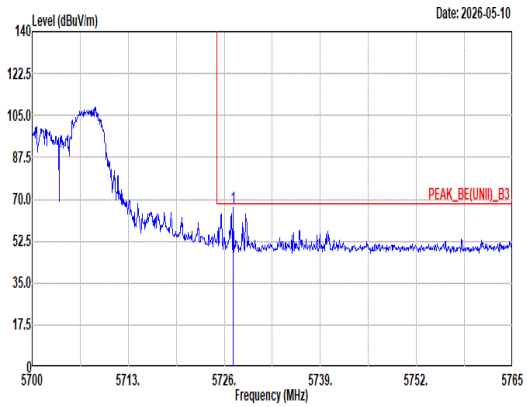 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5727.17 66.55 68.20 -1.65 55.60 33.81 10.74 33.60 0.00 100 202 Peak	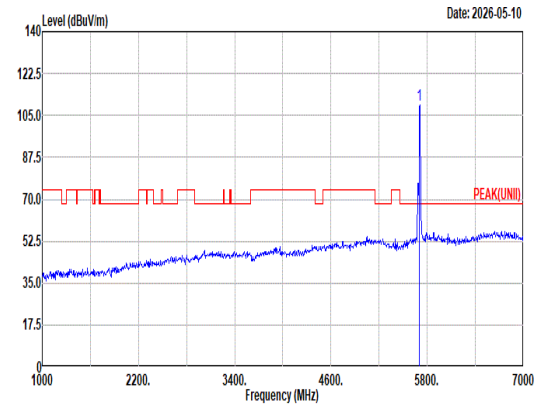 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 109.43 ------ ------ 98.55 33.74 10.73 33.59 0.00 100 202 Peak
Avg	Blank	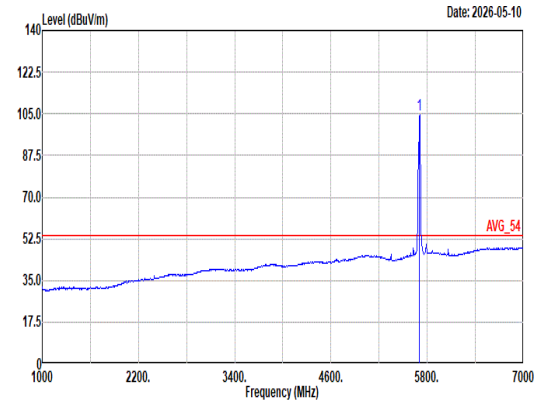 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 104.45 ------ ------ 93.57 33.74 10.73 33.59 0.00 100 202 Average

Mode	45	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_52/40 RU_5700MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	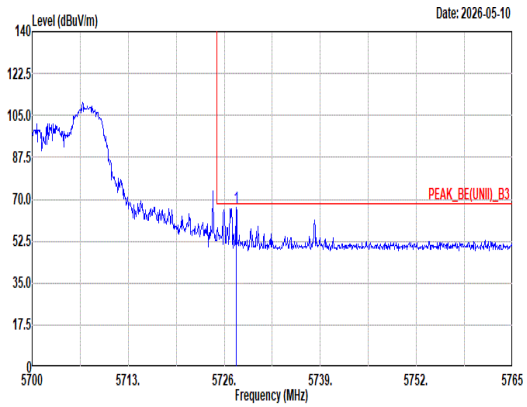 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5727.63 66.72 68.20 -1.48 55.77 33.81 10.74 33.60 0.00 400 157 Peak	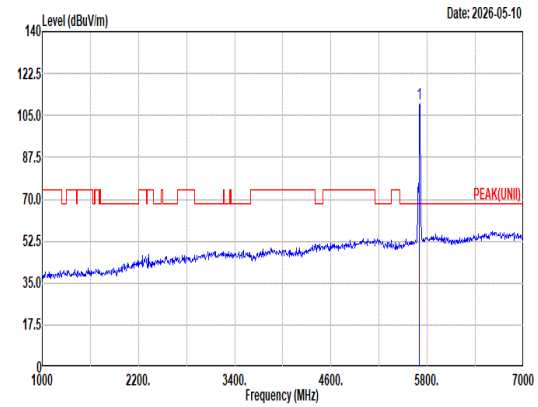 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 110.09 ------ ------ 99.21 33.74 10.73 33.59 0.00 400 157 Peak
Avg	Blank	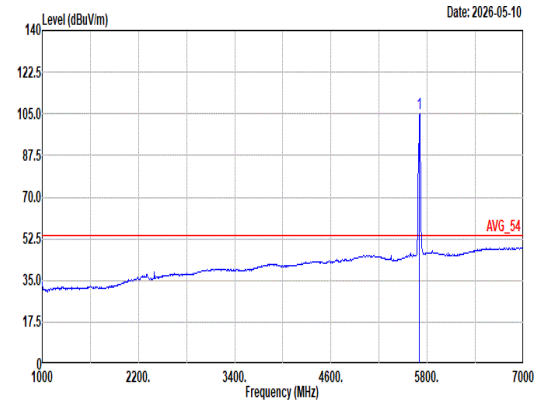 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.400kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 105.00 ------ ------ 94.12 33.74 10.73 33.59 0.00 400 157 Average

Mode	45	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_52/40 RU_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	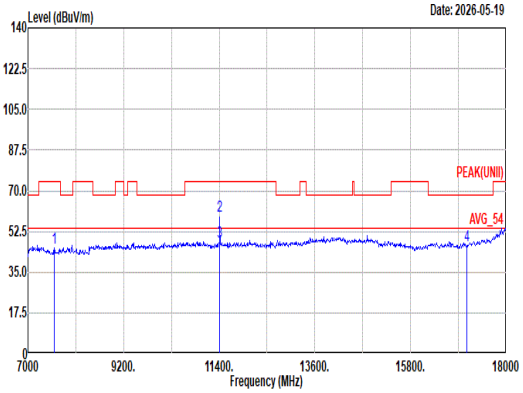 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL 1 7600.00 45.41 74.00 -28.59 50.92 36.42 13.65 56.48 0.90 -- -- Peak 2 11400.00 59.31 74.00 -14.69 57.63 39.20 16.75 54.87 0.60 100 57 Peak 3 11400.00 47.95 54.00 -6.05 46.27 39.20 16.75 54.87 0.60 100 57 Average 4 17100.00 46.63 68.20 -21.57 44.47 38.00 20.39 56.59 0.36 -- -- Peak	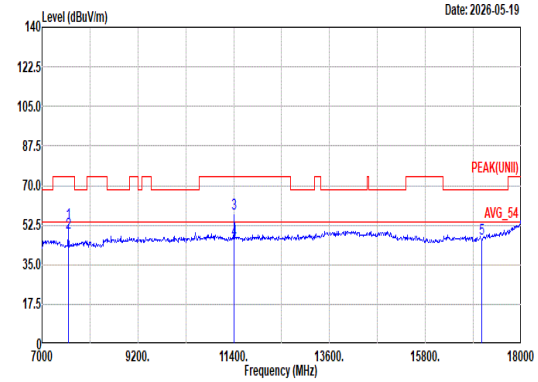 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL 1 7600.00 53.34 74.00 -20.66 58.88 36.40 13.65 56.49 0.90 400 195 Peak 2 7600.00 49.35 54.00 -4.65 54.89 36.40 13.65 56.49 0.90 400 195 Average 3 11400.00 57.47 74.00 -16.53 55.79 39.20 16.75 54.87 0.60 400 314 Peak 4 11400.00 46.13 54.00 -7.87 44.45 39.20 16.75 54.87 0.60 400 314 Average 5 17100.00 46.52 68.20 -21.68 44.36 38.00 20.39 56.59 0.36 -- -- Peak

Mode	45	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_52/40 RU_5700MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	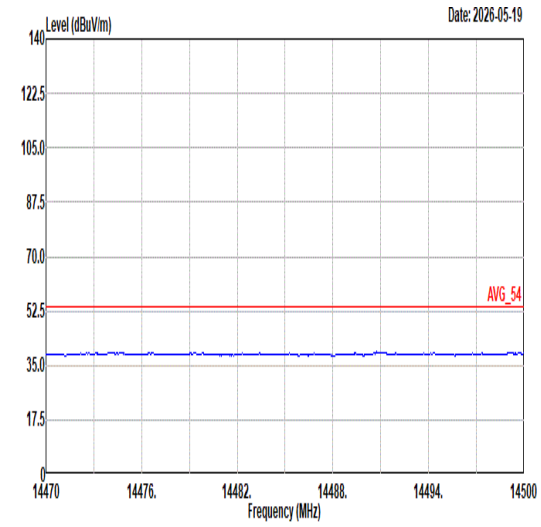 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	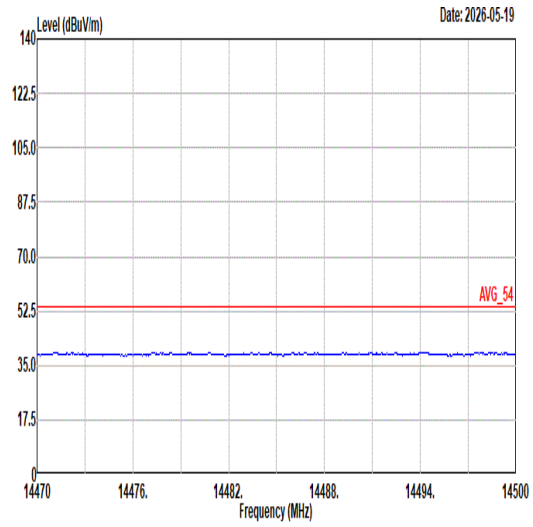 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	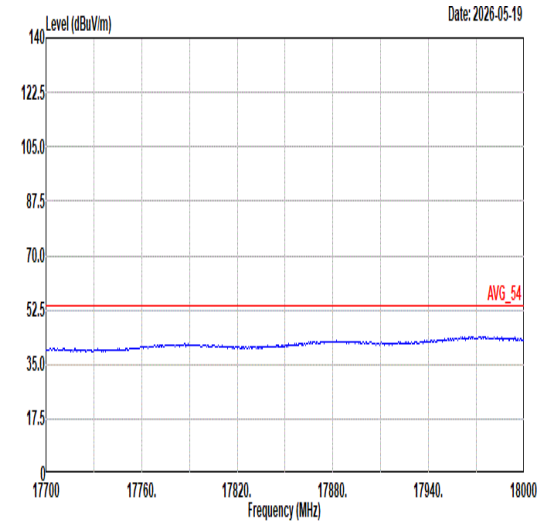 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	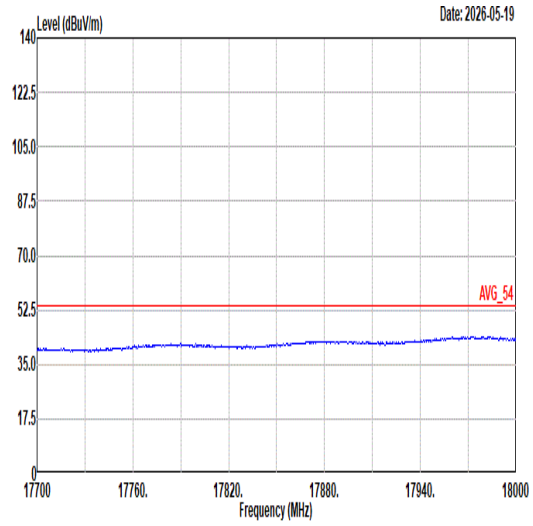 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	46	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_106/53 RU_5500MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	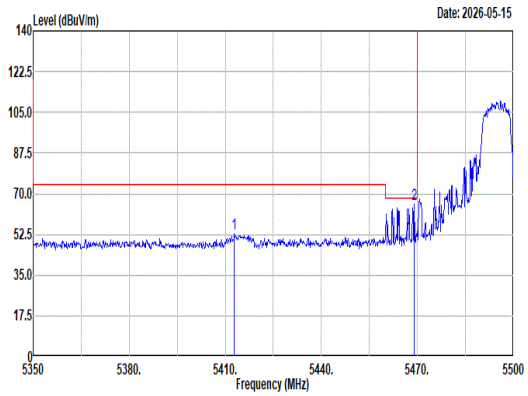 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5412.85 52.67 74.00 -21.33 42.66 33.20 10.39 33.58 0.00 108 261 Peak 2 5469.10 65.35 68.20 -2.85 55.24 33.20 10.48 33.57 0.00 108 261 Peak	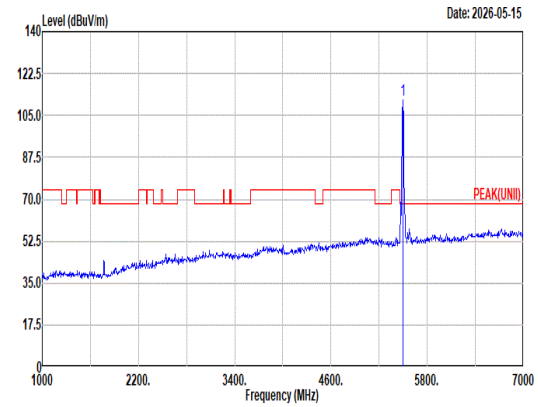 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5500.00 111.63 ------ ------ 101.47 33.20 10.52 33.56 0.00 108 261 Peak
Avg	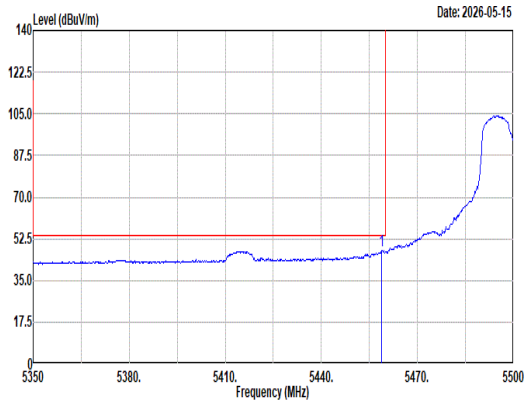 Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto 1 5458.90 47.69 54.00 -6.31 37.60 33.20 10.46 33.57 0.00 108 261 Average	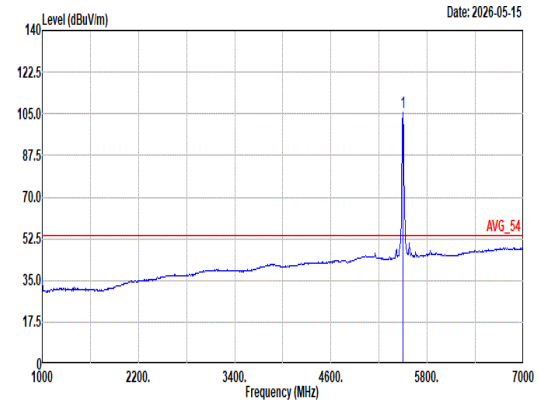 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto 1 5500.00 105.47 ------ ------ 95.31 33.20 10.52 33.56 0.00 108 261 Average

Mode	46	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_106/53 RU_5500MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	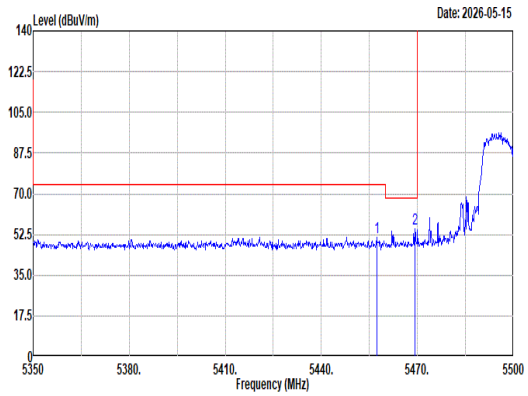 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.25 51.45 74.00 -22.55 41.36 33.20 10.46 33.57 0.00 384 174 Peak 2 5469.25 54.71 68.20 -13.49 44.60 33.20 10.48 33.57 0.00 384 174 Peak	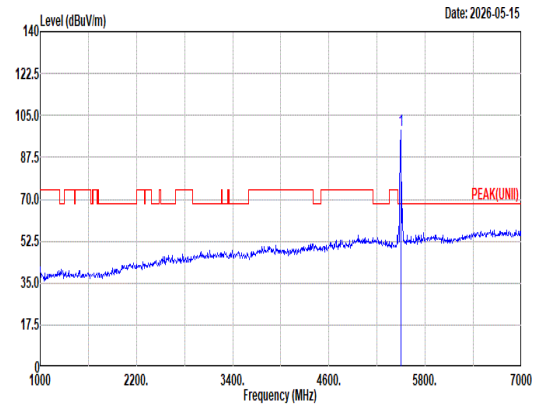 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 98.53 ------ ------ 88.37 33.20 10.52 33.56 0.00 384 174 Peak
Avg	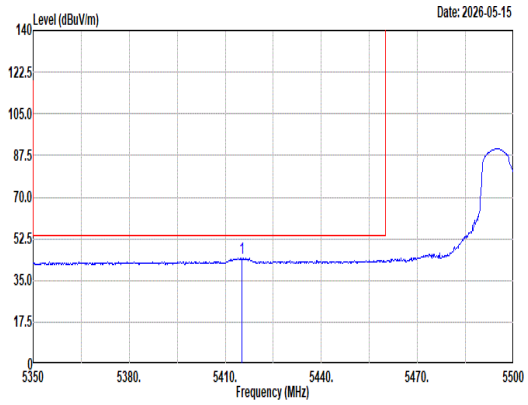 Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5415.10 44.28 54.00 -9.72 34.27 33.20 10.39 33.58 0.00 384 174 Average	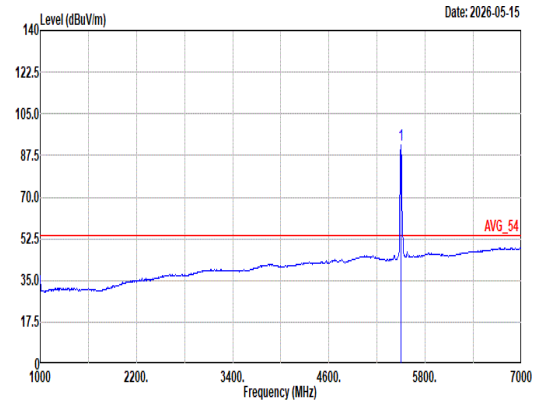 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 91.75 ------ ------ 81.59 33.20 10.52 33.56 0.00 384 174 Average

Mode	46	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_106/53 RU_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	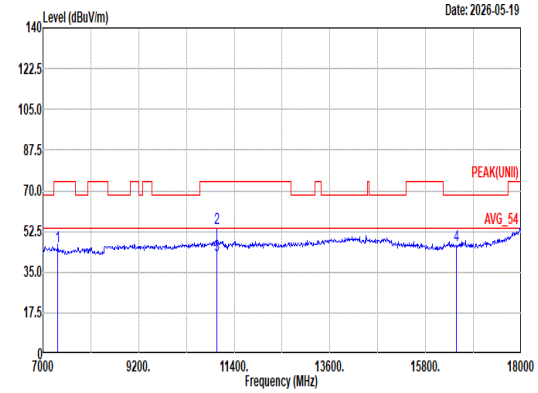 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7333.00 45.79 74.00 -28.21 50.82 37.10 13.40 56.45 0.92 -- -- Peak 2 11000.00 53.85 74.00 -20.15 53.01 38.90 16.47 55.13 0.60 100 62 Peak 3 11000.00 42.47 54.00 -11.53 41.63 38.90 16.47 55.13 0.60 100 62 Average 4 16500.00 46.59 68.20 -21.61 43.45 38.30 19.78 55.27 0.33 -- -- Peak	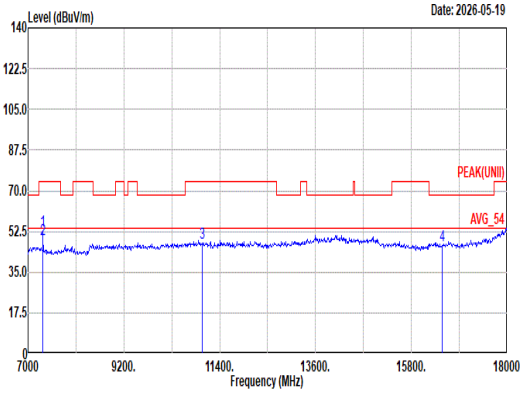 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7333.00 52.81 74.00 -21.19 57.84 37.10 13.41 56.45 0.91 381 178 Peak 2 7333.00 49.18 54.00 -4.82 54.21 37.10 13.41 56.45 0.91 381 178 Average 3 11000.00 47.76 74.00 -26.24 46.92 38.90 16.47 55.13 0.60 -- -- Peak 4 16500.00 46.70 68.20 -21.50 43.56 38.30 19.78 55.27 0.33 -- -- Peak

Mode	46	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_106/53 RU_5500MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	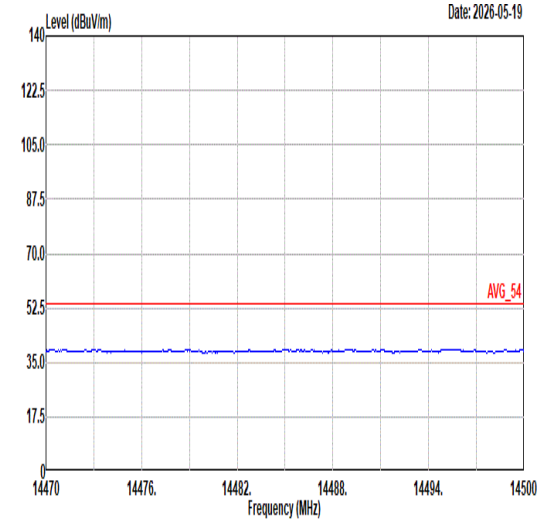 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	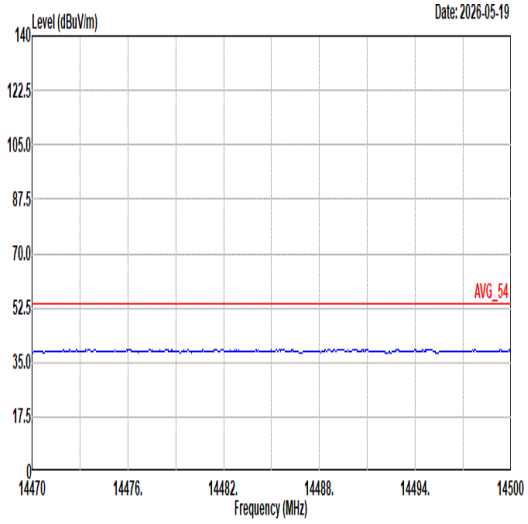 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	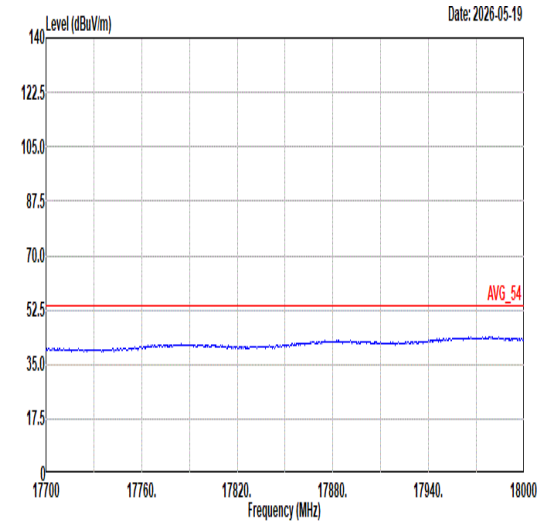 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL	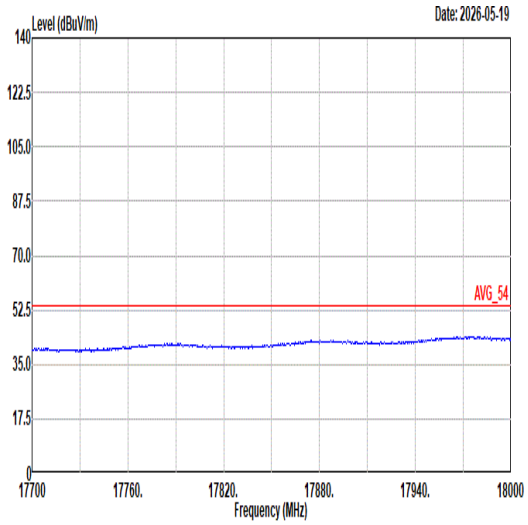 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL

Mode	47
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_106/53 RU_5600MHz
ANT	1

Pol.	Horizontal	Fundamental
Peak	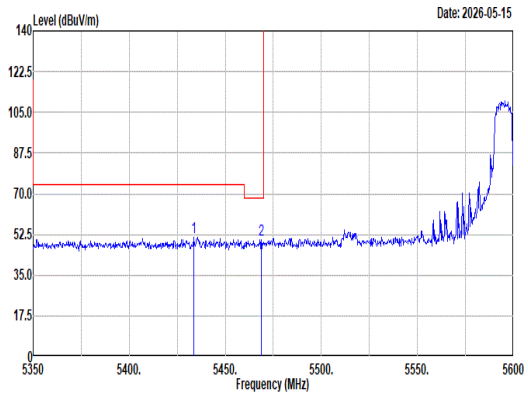 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5433.50 51.43 74.00 -22.57 41.38 33.20 10.42 33.57 0.00 100 269 Peak 2 5468.75 50.30 68.20 -17.90 40.19 33.20 10.48 33.57 0.00 100 269 Peak	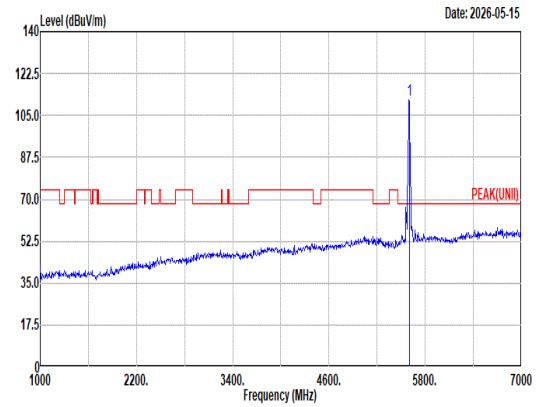 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5600.00 111.21 ------ ------ 100.81 33.30 10.68 33.58 0.00 100 269 Peak
Avg	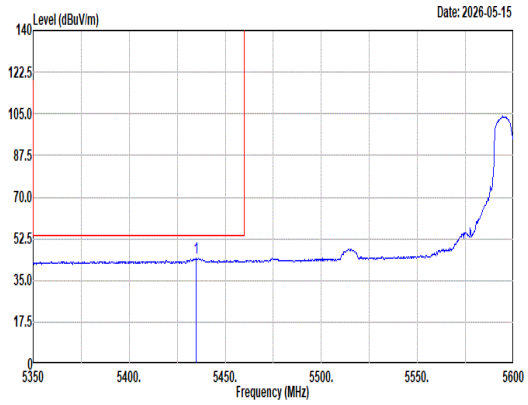 Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5435.00 44.31 54.00 -9.69 34.25 33.20 10.43 33.57 0.00 100 269 Average	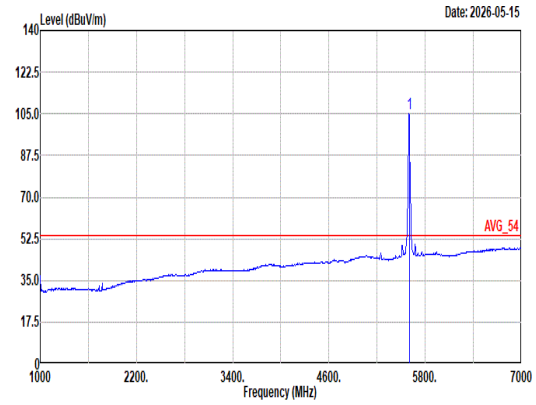 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5600.00 105.06 ------ ------ 94.66 33.30 10.68 33.58 0.00 100 269 Average

Mode	47	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_106/53 RU_5600MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	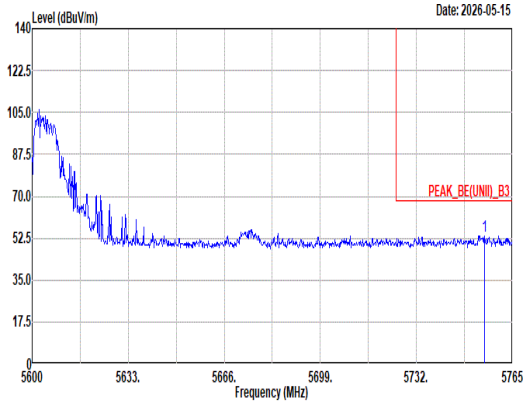 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.43 53.58 68.20 -14.62 42.50 33.93 10.75 33.60 0.00 100 269 Peak	Blank

Mode	47
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_106/53 RU_5600MHz
ANT	1

Pol.	Vertical	Fundamental
Peak	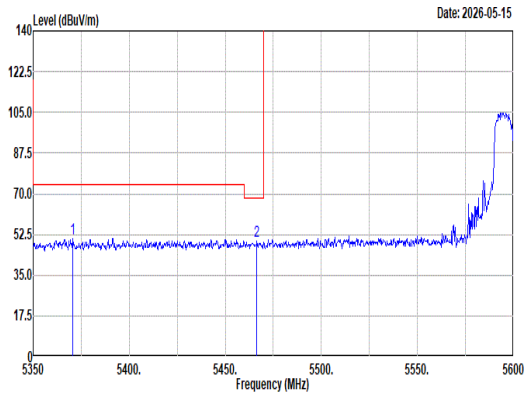 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5370.75 50.96 74.00 -23.04 41.06 33.14 10.35 33.59 0.00 400 152 Peak 2 5466.50 49.73 68.20 -18.47 39.62 33.20 10.48 33.57 0.00 400 152 Peak	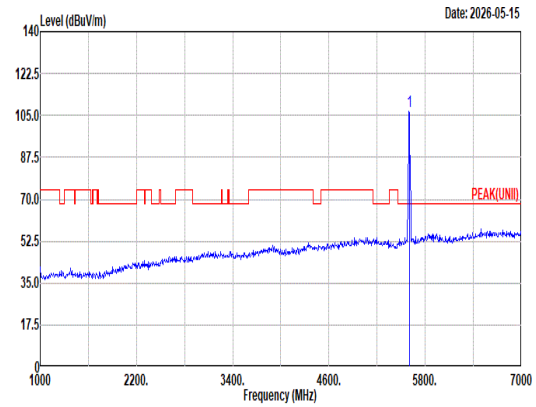 Site : 03CH12-HY Condition: PEAK(UNII) 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5600.00 106.88 ------ ------ 96.48 33.30 10.68 33.58 0.00 400 152 Peak
Avg	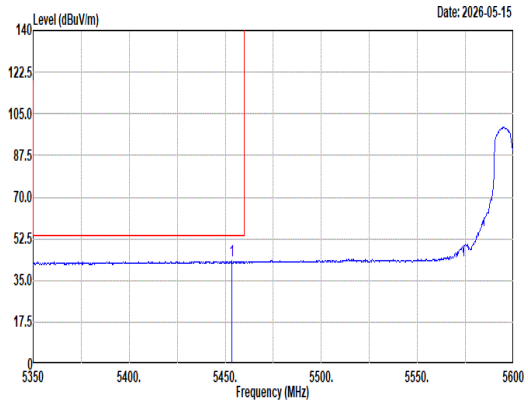 Site : 03CH12-HY Condition: AVG_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5453.25 43.19 54.00 -10.81 33.10 33.20 10.46 33.57 0.00 400 152 Average	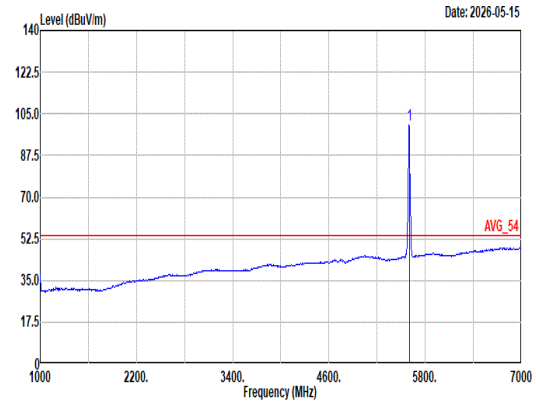 Site : 03CH12-HY Condition: AVG_54 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5600.00 100.45 ------ ------ 90.05 33.30 10.68 33.58 0.00 400 152 Average

Mode	47	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH120_106/53 RU_5600MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	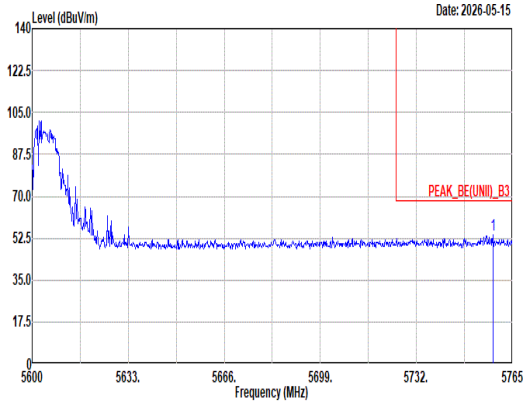 Site : 03CH12-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5758.24 53.92 68.20 -14.28 42.82 33.95 10.75 33.60 0.00 400 152 Peak	Blank