

1#.Measurement Report for Go 6 (Gen II), BACK, WLAN 2.4GHz, UID 10012 CAB, Channel 6 (2437.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Go 6 (Gen II),	150.0 x 110.0 x 8.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 5.00	WLAN 2.4GHz	WLAN, 10012-CAB	2437.000, 6	6.95	1.79	40.0

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2124	HBBL600-10000V6220406-1, 2026-Apr-24	EX3DV4 - SN7783, 2026-04-20	DAE4 Sn1724, 2026-04-17

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-04-24, 21:43	2026-04-24, 22:00
psSAR1g [W/kg]	0.538	0.584
psSAR10g [W/kg]	0.266	0.316
Power Drift [dB]	-0.07	0.14
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		83.1
Dist 3dB Peak [mm]		10.2

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

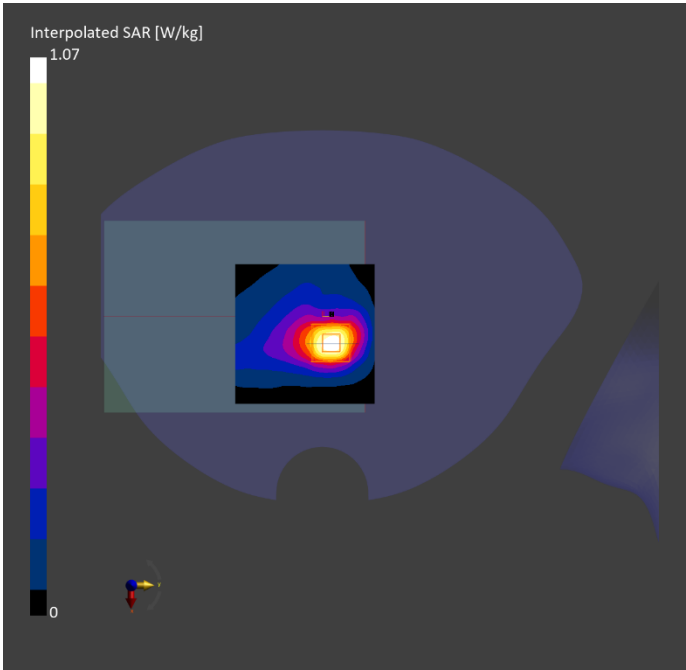

2#.Measurement Report for Go 6 (Gen II), BACK, WLAN 5GHz, UID 10062 CAE, Channel 36 (5180.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Go 6 (Gen II),	150.0 x 110.0 x 8.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 5.00	WLAN 5GHz	WLAN, 10062-CAE	5180.000, 36	4.91	4.61	37.6

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2124	HBBL600-10000V6220406-1, 2026-Apr-25	EX3DV4 - SN7783, 2026-04-20	DAE4 Sn1724, 2026-04-17

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-04-25, 02:53	2026-04-25, 03:11
psSAR1g [W/kg]	0.567	0.680
psSAR10g [W/kg]	0.190	0.298
Power Drift [dB]	-0.08	-0.12
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		77.6
Dist 3dB Peak [mm]		7.2

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

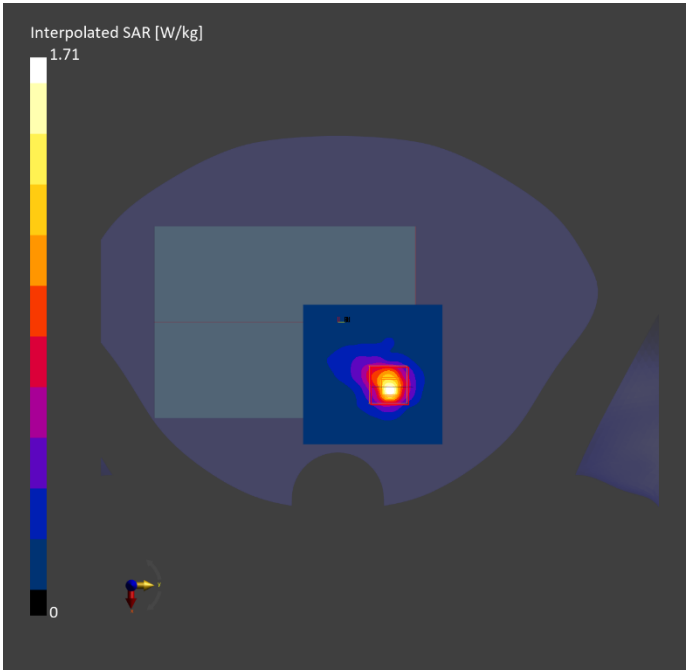

3#.Measurement Report for Go 6 (Gen II), BACK, WLAN 5GHz, UID 10062 CAE, Channel 52 (5260.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Go 6 (Gen II),	150.0 x 110.0 x 8.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 5.00	WLAN 5GHz	WLAN, 10062-CAE	5260.000, 52	4.91	4.78	37.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2124	HBBL600-10000V6220406-1, 2026-Apr-25	EX3DV4 - SN7783, 2026-04-20	DAE4 Sn1724, 2026-04-17

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-04-25, 07:36	2026-04-25, 07:45
psSAR1g [W/kg]	0.519	0.608
psSAR10g [W/kg]	0.183	0.276
Power Drift [dB]	0.16	-0.13
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		79.8
Dist 3dB Peak [mm]		5.6

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

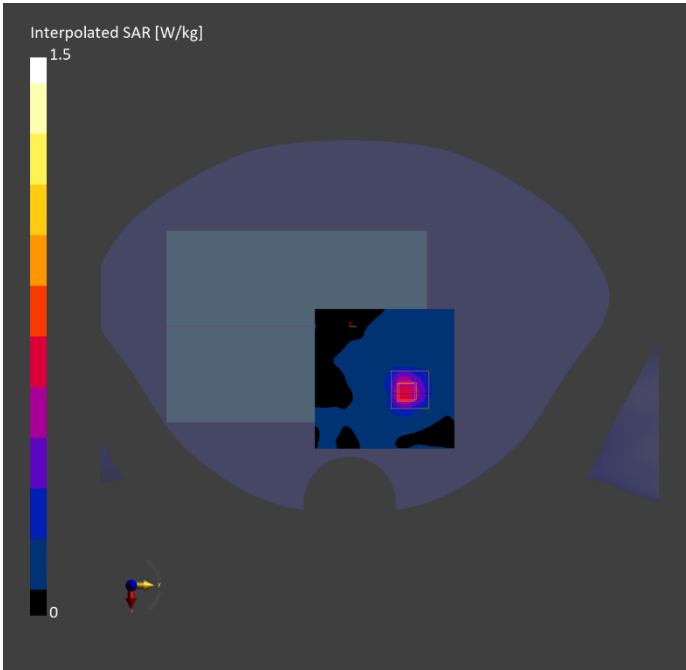

4#.Measurement Report for Go 6 (Gen II), BACK, U-NII-2C Standalone, UID 10062 CAE, Channel 120 (5600.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Go 6 (Gen II),	150.0 x 110.0 x 8.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 5.00	U-NII-2C Standalone	WLAN, 10062-CAE	5600.000, 120	4.3	5.03	35.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2124	HBBL600-10000V6220406-1, 2026-Apr-26	EX3DV4 - SN7783, 2026-04-20	DAE4 Sn1724, 2026-04-17

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-04-26, 09:49	2026-04-26, 10:06
psSAR1g [W/kg]	0.394	0.440
psSAR10g [W/kg]	0.146	0.237
Power Drift [dB]	0.04	-0.13
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		78.8
Dist 3dB Peak [mm]		8.0

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

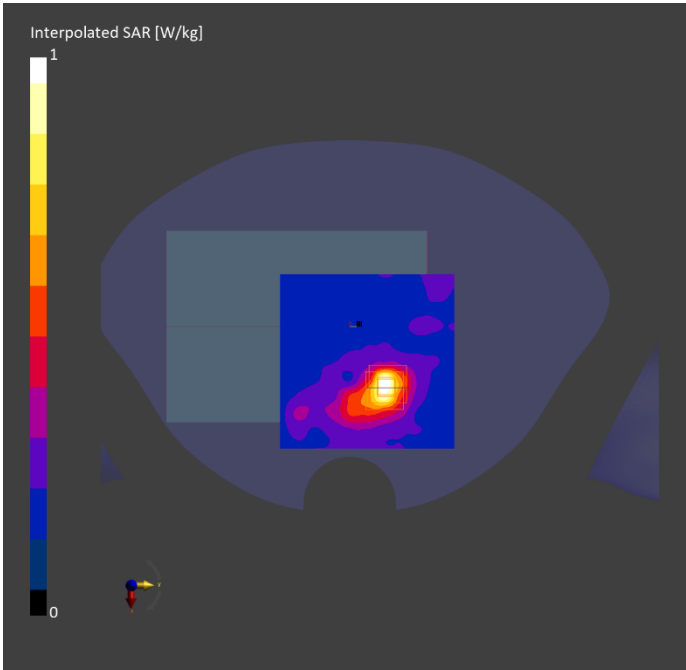

5#.Measurement Report for Go 6 (Gen II), BACK, WLAN 5GHz, UID 10062 CAE, Channel 165 (5825.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Go 6 (Gen II),	150.0 x 110.0 x 8.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 5.00	WLAN 5GHz	WLAN, 10062-CAE	5825.000, 165	4.4	5.30	35.6

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2124	HBBL600-10000V6220406-1, 2026-Apr-26	EX3DV4 - SN7783, 2026-04-20	DAE4 Sn1724, 2026-04-17

Scan Setup


	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-04-26, 18:45	2026-04-26, 19:02
psSAR1g [W/kg]	0.510	0.560
psSAR10g [W/kg]	0.191	0.294
Power Drift [dB]	0.09	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		73.4
Dist 3dB Peak [mm]		7.6

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

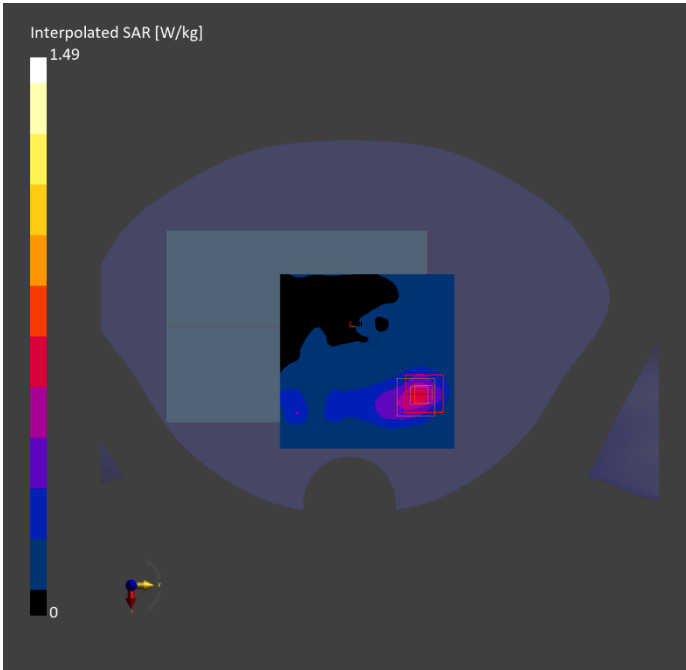

6#.Measurement Report for Go 6 (Gen II), BACK, ISM 2.4 GHz Band, UID 10032 CAA, Channel 39 (2441.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Go 6 (Gen II),	150.0 x 110.0 x 8.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 5.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2441.000, 39	6.95	1.80	40.0

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2124	HBBL600-10000V6220406-1, 2026-Apr-24	EX3DV4 - SN7783, 2026-04-20	DAE4 Sn1724, 2026-04-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	140.0 x 180.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-04-24, 17:39	2026-04-24, 17:56
psSAR1g [W/kg]	0.065	0.068
psSAR10g [W/kg]	0.034	0.043
Power Drift [dB]	-0.02	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		88.0
Dist 3dB Peak [mm]		11.1

Warning(s) / Error(s)

Details	Area Scan	Zoom Scan
Warning(s)		
Error(s)		

