



Product specification

客 户: Shenzhen Fibocom Wireless Co., Ltd.

客户编码: _____

产品编码: 5G external rubber sleeve antenna

制造商编码: GHT-019A (RA version)

产品制造商: Shenzhen Bogesi Communication Technology Co., Ltd.

承认日期: 2026/4/8

Supplier signature	Customer signature
	

Note: 1. After the electronic file or paper file that has been stamped by Bogesi is provided to the demander, the demander shall sign the paper or electronic file back to Bogesi before placing the formal order to Bogesi. If there is no formal change or change notification, Bogesi defaults to the demander's approval and acceptance of the product described in the specification.

2. The related intellectual property rights of this product belong to Shenzhen Bogesi Communication Technology Co., Ltd. Without our permission, please do not apply for patent rights for this product in other names, and please do not disclose this product and related information to others or provide third party reading and use.



深圳市博格斯通信技术有限公司

shenzhen bogesi communication technology co., ltd

Use range:

Applicable to Shenzhen Fibocom Wireless Co., Ltd. 5G antenna solution.

Antenna Model Name:GHT-019A

Antenna Type: Dipole

Antenna Gain: 2.4GHz: 1.83dBi, 5.2GHz: 4.29dBi, 5.3GHz: 4.43dBi, 5.6GHz: 3.68dBi
5.8GHz : 1.47dBi

Antenna Type	Dipole
Band	Antenna Gain (dBi)
FDD 2: US	3.1
FDD 4: US	3.1
FDD 5: US	1.17
FDD 7: EU	2.56
FDD 12: US	1.17
FDD 13: US	1.17
FDD 14: US	1.17
FDD 17: US	1.17
FDD 25: US	3.1
FDD 26: US	1.17
FDD 66:	3.1
FDD 71: US	1.17
TDD 41: US, JP	2.56
n2: US	3.1
n5: US	1.17
n7: EU	2.56
n12: US	1.17
n25: US	3.1
n41: US	2.56
n66: US	3.1
n71: US	1.17
n77	2.99
n78	2.99
BT	1.83
WLAN2.4G	1.83
WLAN5G B1	4.29
WLAN5G B2	4.43
WLAN5G B3	3.68
WLAN5G B4	1.47

Electrical Specifications:

Electrical Specifications	700-1000MHz;1400-6000MHz	Material	ABS
input resistance	50 Ω	Plastic material	Rubber cap:ABS
Standing wave ratio	≤ 3.0		Adapter 1: ABS
Polarization mode	Linear polarization		Adapter 2:ABS
Operating temperature	- 40 $^{\circ}\text{C}$ ~ + 65 $^{\circ}\text{C}$	RF cable specifications	RG-178
Storage temperature	- 40 $^{\circ}\text{C}$ ~ + 80 $^{\circ}\text{C}$	Connector specifications	SMA Male J
Connector torque test	200 ~ 1000 g.cm	Joint tension test	SMA $\geq$ 3 Kg



深圳市博格斯通信技术有限公司

shenzhen bogesi communication technology co.,ltd

Test data:

BGS-036(700-1000)_30du	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
	700	4.06	-4.12	38.75	-0.06
	710	4.27	-4.09	39.04	0.19
	720	4.40	-3.87	41.02	0.53
	730	4.42	-3.71	42.52	0.71
	740	4.49	-3.75	42.14	0.74
	750	4.52	-3.91	40.62	0.60
	760	4.60	-3.93	40.44	0.66
	770	4.65	-3.90	40.76	0.76
	780	4.57	-3.65	43.11	0.92
	790	4.29	-3.34	46.32	0.94
	800	3.85	-3.12	48.71	0.72
	810	3.38	-2.97	50.49	0.41
	820	2.98	-2.82	52.19	1.42
	830	2.64	-2.65	54.28	1.55
	840	2.33	-2.35	58.15	1.61
	850	2.03	-1.91	64.47	1.66
	860	1.72	-1.46	71.43	1.61
	870	1.85	-1.13	77.15	1.55
	880	2.20	-1.02	79.03	1.17
	890	2.30	-1.21	75.66	1.91
	900	2.24	-1.58	69.49	0.66
	910	2.08	-1.83	65.60	0.25
	920	1.94	-2.10	61.70	-0.16
	930	2.01	-2.33	58.51	-0.32
	940	2.29	-2.63	54.60	-0.34
	950	2.63	-3.17	48.21	-0.54
	960	2.84	-4.02	39.59	-1.19
	970	2.86	-5.11	30.86	-2.25
	980	2.83	-6.14	24.34	-3.31
	990	2.96	-7.09	19.55	-4.13
	1000	3.30	-7.55	17.57	-4.26

BGS-036(1400-1690)_30du	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
	1400	3.67	-0.82	82.77	1.85
	1410	3.49	-0.88	81.60	1.61
	1420	3.34	-0.92	80.85	1.42
	1430	3.35	-0.76	83.95	1.59
	1440	3.51	-0.57	87.70	1.94
	1450	3.71	-0.49	89.24	1.22
	1460	3.88	-0.51	88.83	1.36
	1470	3.90	-0.74	84.33	1.16
	1480	3.81	-0.89	81.41	1.92
	1490	3.68	-0.98	79.86	1.70
	1500	3.63	-0.85	82.17	1.78
	1510	3.70	-0.76	84.04	2.94
	1520	3.84	-0.73	84.47	3.10
	1530	3.92	-0.71	84.83	3.21
	1540	3.91	-1.01	79.19	2.90
	1550	3.87	-1.21	75.68	2.66
	1560	3.81	-1.33	73.68	2.48
	1570	3.80	-1.28	74.45	2.52
	1580	3.87	-1.10	77.67	2.77
	1590	3.99	-0.96	80.24	3.04
	1600	4.09	-0.99	79.62	3.10
	1610	4.13	-1.14	76.92	2.99
	1620	4.13	-1.32	73.76	2.81
	1630	4.12	-1.53	70.25	2.59
	1640	4.16	-1.56	69.82	2.60
	1650	4.31	-1.43	71.93	2.88
	1660	4.46	-1.27	74.63	2.19
	1670	4.60	-1.10	77.58	2.50
	1680	4.72	-1.09	77.74	2.62
	1690	4.79	-1.16	76.54	2.63

BGS-036(1700-2000)_30du	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
	1700	4.84	-0.99	79.71	1.81
	1710	4.87	-1.13	77.05	1.88
	1720	4.89	-1.03	78.81	1.86
	1730	4.88	-1.00	79.47	1.89
	1740	4.86	-0.92	80.92	1.94
	1750	4.80	-0.98	79.75	1.82
	1760	4.70	-1.12	77.25	1.58
	1770	4.64	-1.35	73.33	1.29
	1780	4.59	-1.48	71.12	1.11
	1790	4.58	-1.48	71.06	2.10
	1800	4.59	-1.51	70.55	3.08
	1810	4.60	-1.50	70.86	3.10
	1820	4.60	-1.61	68.98	2.99
	1830	4.59	-1.78	66.43	2.81
	1840	4.56	-1.92	64.24	2.64
	1850	4.57	-2.07	62.06	2.50
	1860	4.59	-2.09	61.82	2.50
	1870	4.63	-2.03	62.66	2.63
	1880	4.66	-1.89	64.75	1.77
	1890	4.64	-1.79	66.19	1.85
	1900	4.58	-1.84	65.45	1.74
	1910	4.50	-1.92	64.22	1.80
	1920	4.41	-2.13	61.20	1.33
	1930	4.31	-2.25	59.50	1.44
	1940	4.23	-2.36	58.01	1.42
	1950	4.18	-2.23	59.88	1.33
	1960	4.10	-2.27	59.32	1.33
	1970	3.97	-2.35	58.17	1.42
	1980	3.89	-2.49	56.35	1.40
	1990	3.85	-2.70	53.71	1.15
	2000	3.89	-2.82	52.24	1.07

BGS-036(2010-2480)_30du	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
	2010	3.96	-2.82	52.22	1.14
	2020	4.09	-2.69	53.82	1.40
	2030	4.18	-2.53	55.84	1.65
	2040	4.19	-2.45	56.95	1.75
	2050	4.17	-2.46	56.74	1.71
	2060	4.14	-2.49	56.37	1.65
	2070	4.16	-2.60	54.96	1.56
	2080	4.21	-2.67	54.13	1.54
	2090	4.29	-2.74	53.26	1.55
	2100	4.35	-2.68	53.90	1.67
	2110	4.36	-2.83	52.08	1.53
	2120	4.30	-3.00	50.09	1.30
	2130	4.23	-3.16	48.29	1.07
	2140	4.20	-3.32	46.54	0.88
	2150	4.25	-3.33	46.42	0.92
	2160	4.36	-3.30	46.80	1.07
	2170	4.47	-3.16	48.33	1.31
	2180	4.52	-2.98	50.40	1.54
	2190	4.50	-2.84	52.00	1.66
	2200	4.46	-2.70	53.68	1.76
	2210	4.43	-2.66	54.21	1.77
	2220	4.50	-2.51	56.17	2.00
	2230	4.60	-2.22	60.04	2.39
	2240	4.69	-1.81	65.86	2.88
	2250	4.66	-1.39	72.60	3.27
	2260	4.53	-1.17	76.43	3.36
	2270	4.34	-1.06	78.36	3.28
	2280	4.19	-1.18	76.19	3.01
	2290	4.14	-1.23	75.29	2.91
	2300	4.13	-1.38	72.78	2.75
	2310	4.15	-1.45	71.54	2.70
	2320	4.12	-1.47	71.23	2.65
	2330	3.96	-1.55	69.94	2.40
	2340	3.74	-1.59	69.41	2.15
	2350	3.57	-1.76	66.70	1.81
	2360	3.47	-1.87	65.07	1.60
	2370	3.48	-1.89	64.71	1.59
	2380	3.51	-1.89	64.65	1.62
	2390	3.55	-1.84	65.49	1.71
	2400	3.50	-1.87	65.04	1.63
	2410	3.37	-1.87	65.08	1.51
	2420	3.30	-1.96	63.67	1.34
	2430	3.26	-2.10	61.64	1.16
	2440	3.28	-2.08	61.89	1.20
	2450	3.39	-2.03	62.62	1.35
	2460	3.48	-1.86	65.23	1.62
	2470	3.49	-1.66	68.19	1.83
	2480	3.47	-1.43	71.97	1.04

	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
BGS- 036(2490- 2750,3350- 3570)_30du	2490	3.36	-1.27	74.58	1.08
	2500	3.34	-1.24	75.22	1.10
	2510	3.40	-1.25	74.91	1.14
	2520	3.42	-1.30	74.20	1.13
	2530	3.44	-1.30	74.18	1.52
	2540	3.47	-1.20	75.86	1.27
	2550	3.56	-1.16	76.53	0.98
	2560	3.61	-1.17	76.46	1.07
	2570	3.64	-1.29	74.23	1.35
	2580	3.64	-1.36	73.06	1.28
	2590	3.52	-1.48	71.18	1.04
	2600	3.40	-1.56	69.79	1.83
	2610	3.34	-1.69	67.81	1.66
	2620	3.31	-1.79	66.17	1.52
	2630	3.38	-1.84	65.48	1.54
	2640	3.43	-1.98	63.45	1.46
	2650	3.42	-2.09	61.79	1.33
	2660	3.37	-2.13	61.27	1.24
	2670	3.30	-2.23	59.78	1.06
	2680	3.25	-2.22	60.02	1.04
	2690	3.27	-2.18	60.47	1.09
	2700	3.30	-2.17	60.62	1.12
	2710	3.36	-2.07	62.04	1.29
	2720	3.37	-2.07	62.06	1.30
	2730	3.34	-2.12	61.36	1.22
	2740	3.30	-2.19	60.42	1.12
	2750	3.45	-2.13	61.18	1.32
	3350	3.25	-1.77	66.50	1.48
	3360	3.27	-1.70	67.67	1.57
	3370	3.26	-1.68	67.85	1.58
	3380	3.19	-1.72	67.31	1.47
	3390	3.11	-1.65	68.38	1.46
	3400	3.02	-1.61	68.98	1.41
	3410	2.98	-1.57	69.71	1.41
	3420	2.90	-1.51	70.65	1.39
	3430	2.80	-1.53	70.38	1.27
	3440	2.88	-1.53	70.26	1.35
	3450	3.03	-1.50	70.84	1.54
	3460	3.26	-1.45	71.60	1.81
	3470	3.59	-1.39	72.61	2.25
	3480	3.91	-1.35	73.33	2.56
	3490	4.12	-1.37	73.01	1.75
	3500	4.32	-1.40	72.46	1.93
	3510	4.44	-1.51	70.69	1.94
	3520	4.53	-1.64	68.60	1.89
	3530	4.71	-1.63	68.66	1.07
	3540	4.87	-1.63	68.76	1.24
	3550	5.01	-1.50	70.78	1.51
	3560	5.15	-1.34	73.44	1.81
	3570	5.20	-1.22	75.57	1.99

	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
BGS- 036(3580- 3850)_30du	3580	5.21	-1.17	76.38	2.04
	3590	5.08	-1.24	75.16	1.84
	3600	5.02	-1.28	74.56	1.74
	3610	4.92	-1.36	73.07	1.56
	3620	4.90	-1.40	72.47	1.50
	3630	4.85	-1.45	71.69	1.41
	3640	4.86	-1.51	70.57	1.35
	3650	4.79	-1.60	69.23	1.19
	3660	4.76	-1.64	68.51	1.12
	3670	4.76	-1.70	67.68	1.07
	3680	4.76	-1.67	68.15	1.09
	3690	4.86	-1.65	68.36	1.21
	3700	4.86	-1.70	67.53	1.16
	3710	4.75	-1.85	65.26	1.90
	3720	4.65	-1.88	64.90	1.77
	3730	4.56	-1.97	63.58	1.99
	3740	4.58	-1.95	63.80	2.33
	3750	4.58	-1.90	64.59	2.55
	3760	4.76	-1.80	66.04	2.99
	3770	4.89	-1.66	68.18	2.88
	3780	4.88	-1.60	69.21	2.21
	3790	4.75	-1.59	69.31	1.99
	3800	4.71	-1.61	69.07	1.10
	3810	4.49	-1.70	67.61	2.79
	3820	4.41	-1.69	67.72	2.72
	3830	4.40	-1.72	67.30	2.68
	3840	4.44	-2.01	62.88	2.43
	3850	4.41	-1.70	67.58	2.70

	Frequency	Directivi	Avg	Efficienc	Peak
	(MHz)	ty (dBi)	Gain(dBi)	y (%)	Gain(dBi)
BCS-036 (5000-5490)_30da	5000	6.12	-1.81	65.87	4.31
	5010	6.15	-1.83	65.59	4.32
	5020	6.13	-1.80	66.05	4.32
	5030	6.12	-1.89	64.65	4.23
	5040	6.14	-2.09	61.78	4.05
	5050	6.09	-2.09	61.74	3.99
	5060	6.09	-2.09	61.74	4.00
	5070	6.02	-2.04	62.56	3.98
	5080	6.11	-2.07	62.13	4.04
	5090	6.12	-2.07	62.07	4.05
	5100	6.13	-2.04	62.55	4.09
	5110	6.17	-2.00	63.11	4.17
	5120	6.17	-2.08	61.96	4.09
	5130	6.21	-2.08	61.90	4.13
	5140	6.26	-2.14	61.05	4.12
	5150	6.32	-2.26	59.39	4.06
	5160	6.31	-2.13	61.26	4.18
	5170	6.34	-2.20	60.31	4.15
	5180	6.29	-2.20	60.32	4.09
	5190	6.39	-2.20	60.28	4.19
	5200	6.41	-2.23	59.77	4.17
	5210	6.40	-2.244	59.67	4.15
	5220	6.40	-2.12	61.40	4.29
	5230	6.42	-2.20	60.32	4.22
	5240	6.45	-2.22	59.91	4.22
	5250	6.49	-2.28	59.18	4.21
	5260	6.47	-2.33	58.45	4.14
	5270	6.45	-2.37	57.99	4.08
	5280	6.52	-2.31	58.73	4.21
	5290	6.60	-2.34	58.33	4.25
	5300	6.66	-2.36	58.13	4.30
	5310	6.68	-2.37	57.89	4.31
	5320	6.68	-2.31	58.70	4.36
	5330	6.69	-2.26	59.47	4.43
	5340	6.71	-2.28	59.10	4.43
	5350	6.70	-2.29	58.97	4.40
	5360	6.73	-2.26	59.37	4.46
	5370	6.74	-2.25	59.59	4.49
	5380	6.77	-2.31	58.79	4.47
	5390	6.78	-2.35	58.26	4.44
	5400	6.79	-2.45	56.87	4.34
	5410	6.79	-2.50	56.20	4.29
	5420	6.74	-2.58	55.27	4.17
	5430	6.70	-2.61	54.81	4.09
	5440	6.70	-2.73	53.32	3.97
	5450	6.61	-2.72	53.49	3.89
	5460	6.57	-2.80	52.53	3.77
	5470	6.51	-2.83	52.14	3.68
	5480	6.49	-2.83	52.08	3.66
	5490	6.36	-2.88	51.49	3.47


	Frequency	Directivi	Avg	Efficienc	Peak
	(MHz)	ty (dBi)	Gain(dBi)	y (%)	Gain(dBi)
BCS-036 (5500-6000)_30da	5500	6.30	-2.98	50.41	3.32
	5510	6.24	-3.07	49.35	3.17
	5520	6.17	-3.15	48.37	3.02
	5530	6.07	-3.18	48.14	2.89
	5540	5.97	-3.19	48.00	2.78
	5550	5.83	-3.18	48.05	2.65
	5560	5.75	-3.18	48.05	2.56
	5570	5.61	-3.25	47.30	2.36
	5580	5.56	-3.26	47.21	2.30
	5590	5.42	-3.30	46.82	2.12
	5600	5.26	-3.32	46.61	1.94
	5620	4.85	-3.19	47.96	1.66
	5630	4.65	-3.19	47.94	1.45
	5640	4.55	-3.20	47.84	1.34
	5650	4.48	-3.27	47.15	1.21
	5660	4.33	-3.21	47.72	1.12
	5670	4.25	-3.10	48.94	1.15
	5680	3.97	-2.98	50.33	0.99
	5690	3.90	-2.93	50.99	0.98
	5700	3.90	-2.89	51.42	1.01
	5710	4.11	-2.94	50.81	1.17
	5720	4.10	-2.97	50.42	1.13
	5730	4.02	-3.00	50.08	1.01
	5740	4.03	-2.89	51.42	1.14
	5750	4.03	-2.86	51.74	1.17
	5760	4.14	-2.83	52.08	1.31
	5770	4.02	-2.84	52.04	1.19
	5780	4.01	-2.88	51.54	1.13
	5790	4.05	-2.92	51.07	1.14
	5800	4.11	-2.92	51.01	1.19
	5810	4.09	-2.93	50.94	1.16
	5820	4.12	-2.90	51.27	1.22
	5830	4.17	-2.90	51.32	1.28
	5840	4.05	-2.83	52.12	1.22
	5850	4.18	-2.71	53.63	1.47
	5860	4.22	-2.78	52.69	1.44
	5870	4.27	-2.80	52.43	1.46
	5880	4.17	-2.83	52.15	1.34
	5890	4.07	-2.76	52.93	1.30
	5900	4.03	-2.70	53.67	1.33
	5910	3.97	-2.65	54.27	1.31
	5920	3.92	-2.71	53.52	1.21
	5930	3.92	-2.85	51.93	1.08
	5940	3.84	-2.91	51.14	0.92
	5950	3.71	-2.95	50.66	0.76
	5960	3.80	-2.90	51.24	0.90
	5970	3.83	-2.81	52.36	1.02
	5980	3.81	-2.78	52.76	1.04
	5990	3.77	-2.81	52.31	0.96
	6000	3.80	-2.83	52.07	0.96




深圳市博格斯通信技术有限公司


shenzhen bogesi communication technology co.,ltd

Direction map:

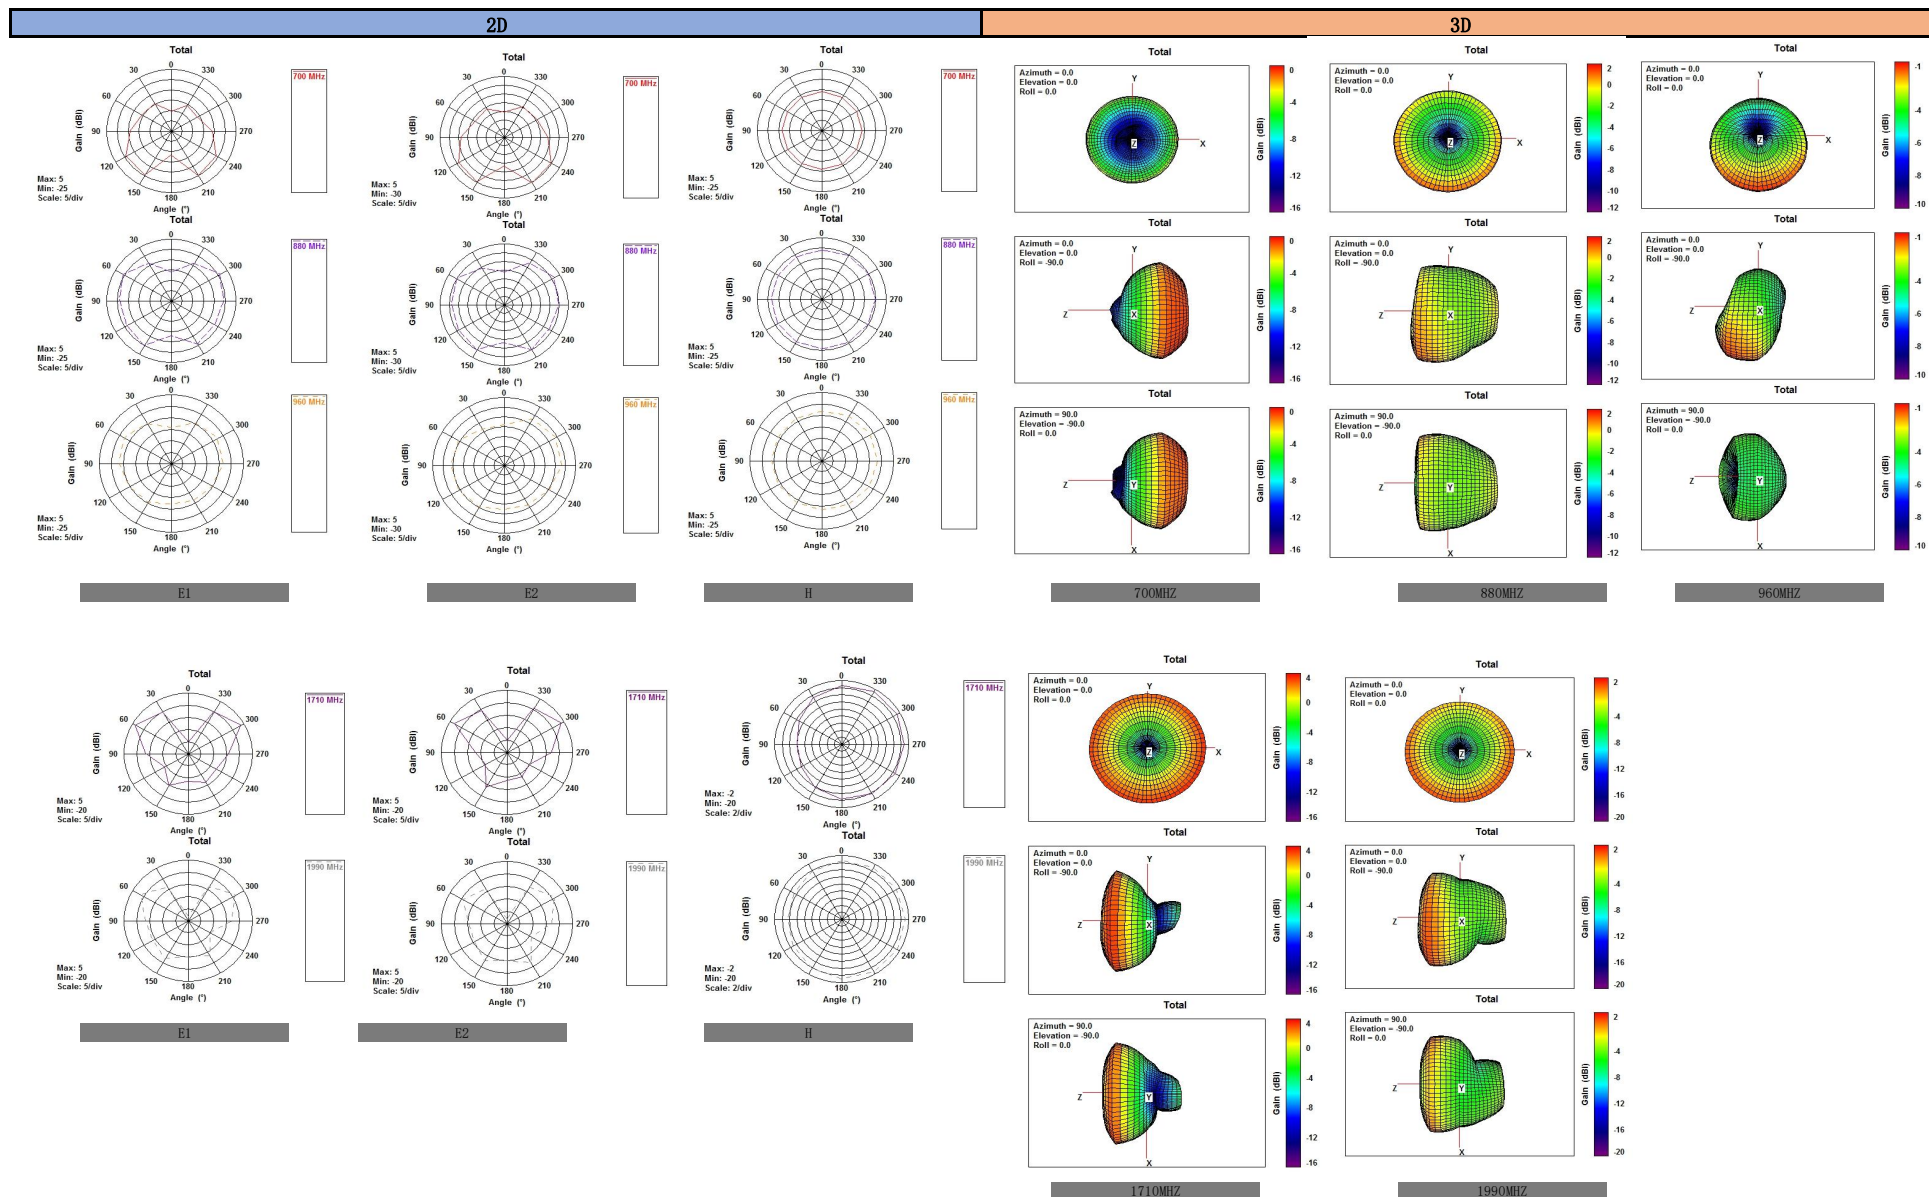







2170 MHz




2170 MHz




2170 MHz




2170MHZ






2690 MHz






2690 MHz




2690 MHz




2690MHZ




3350MHZ









3350 MHz




3350 MHz




3350 MHz







E1




E2




H

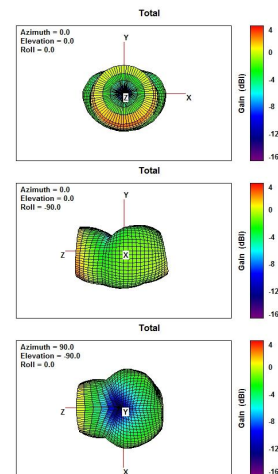


3800MHZ




E1




E2



H

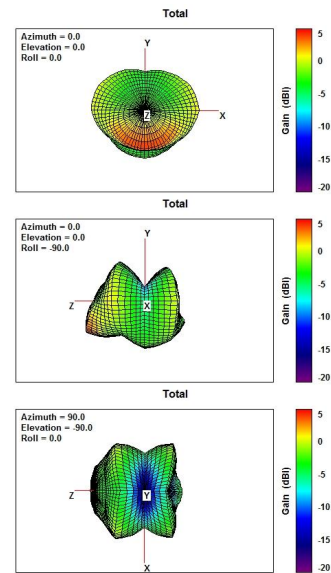


5370MHZ




E1

6000 MHz




E2

6000 MHz



H

6000 MHz

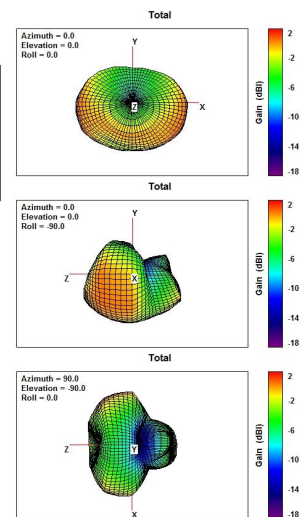

6000MHZ

广屏ETS3D微波暗室 (5x3x3)



Agilent 8753E




Agilent E5071B



SP9500

测试系统	测试环境	有源测试	无源测试
ETS	温度：22℃±3℃ 湿度：50%±15%	支持2G/3G/4G/5G 支持BT/WIFI/GPS	400MHZ——6G

Agilent E5071B
Calibration date : 2026.01.28
Due date : 2027.01.27

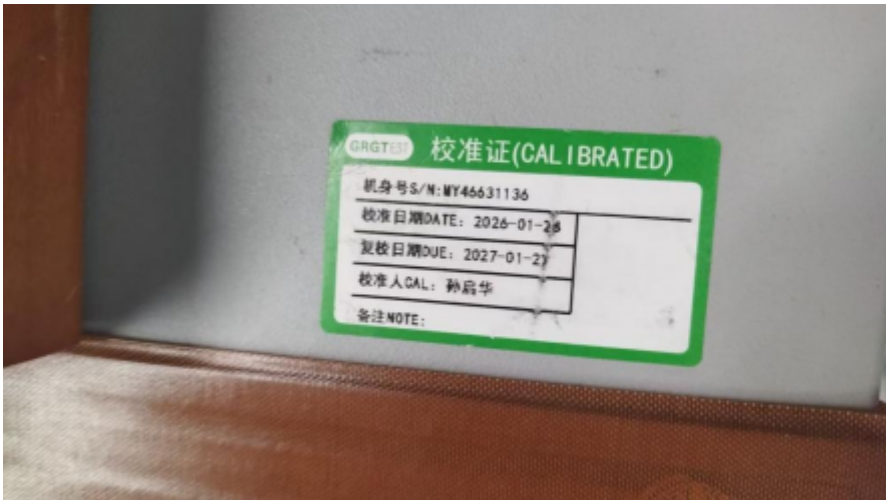




SP9500 :
Calibration date : 2025.12.01
Due date : 2026.11.30








Direction map:




700

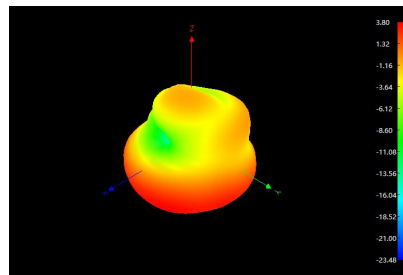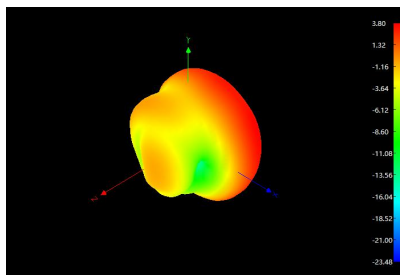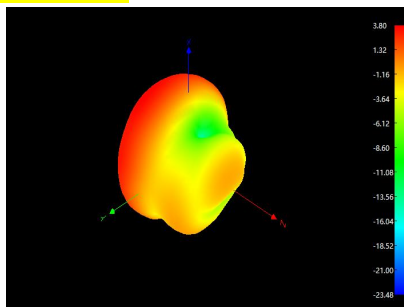




750

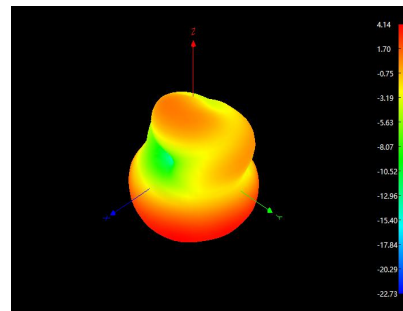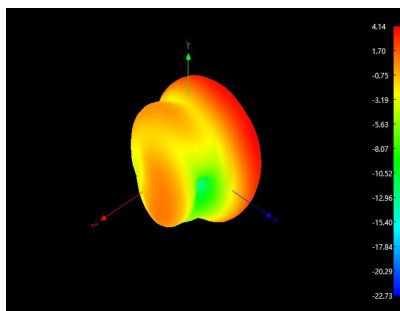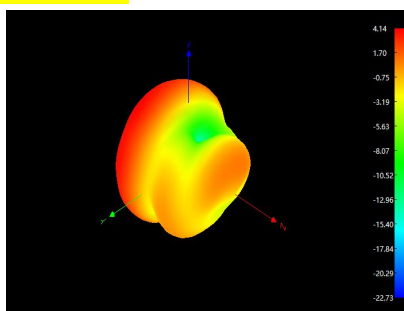




800

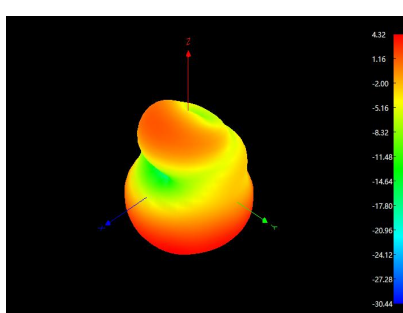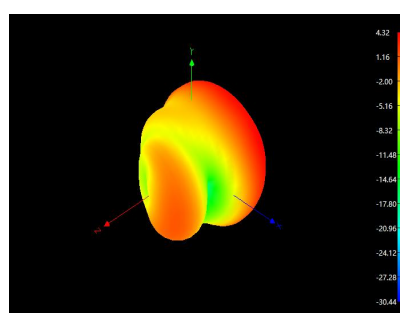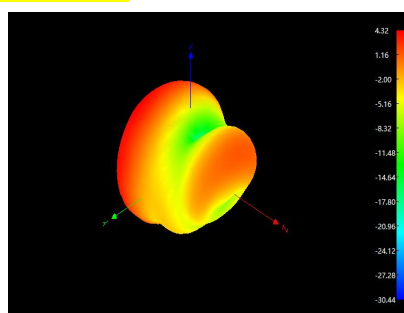




850

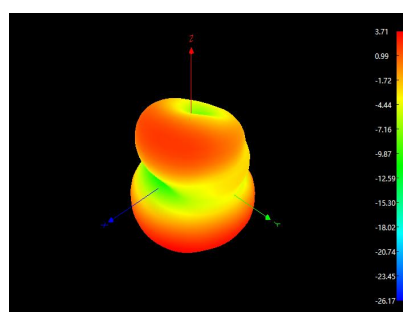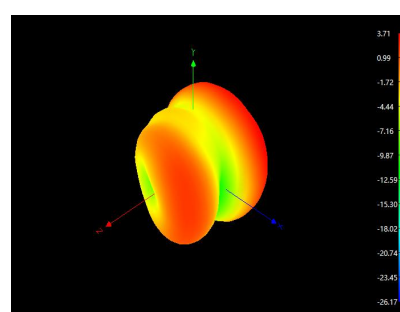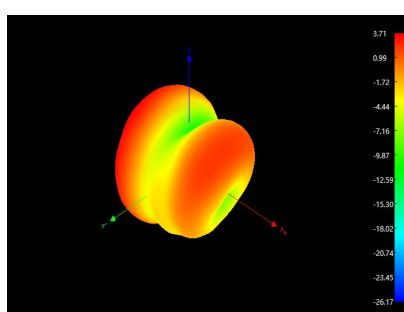




1570

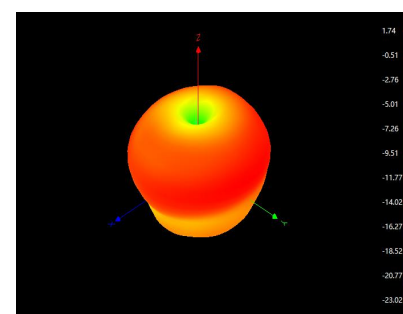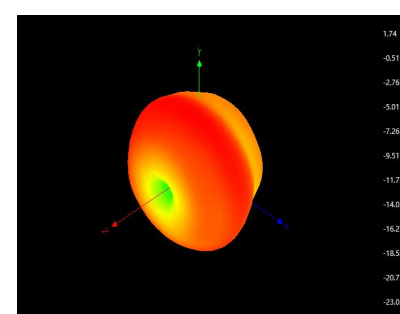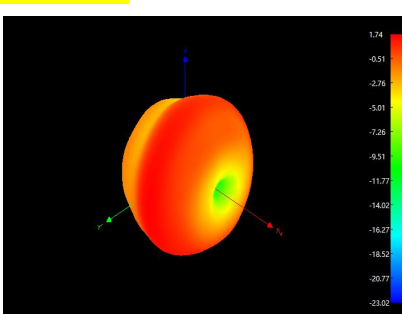




2170

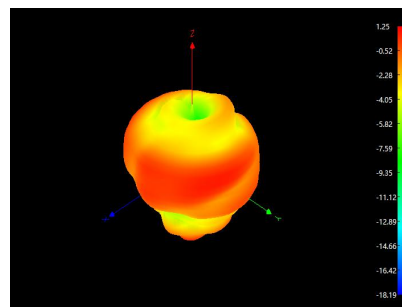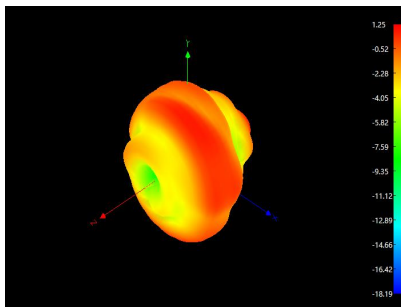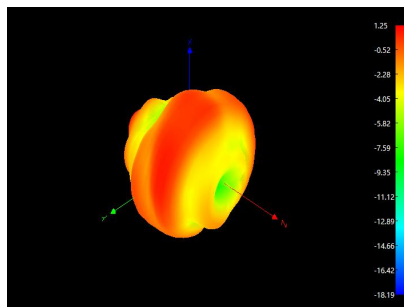




2400

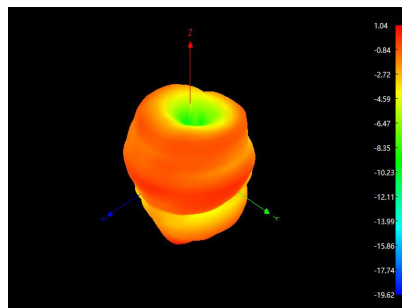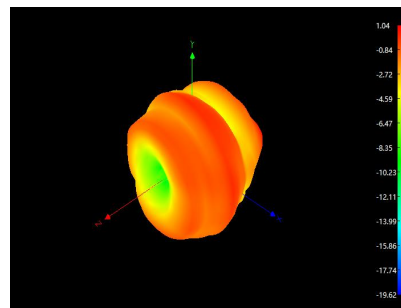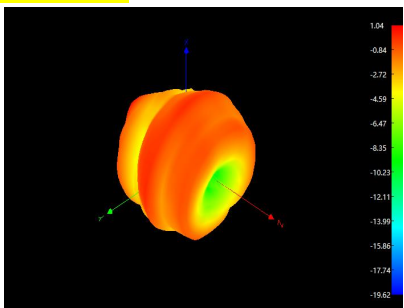




2500

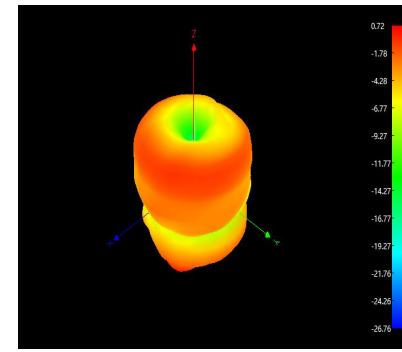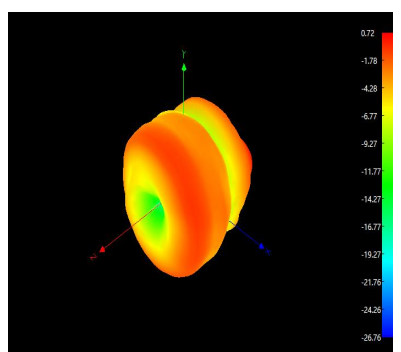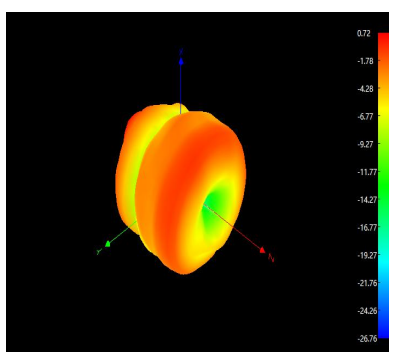




3000

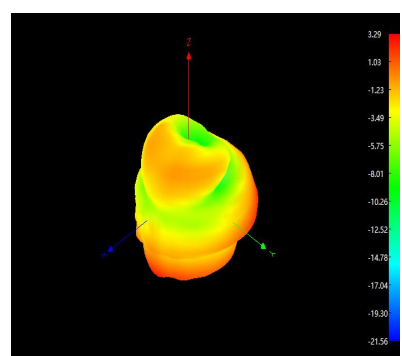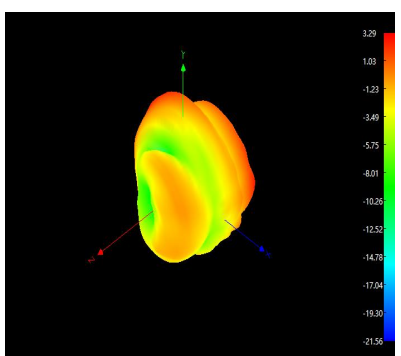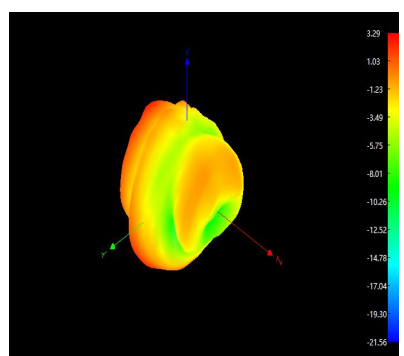




3500

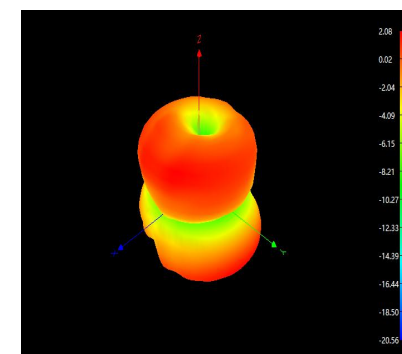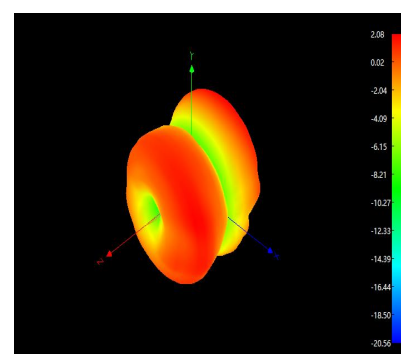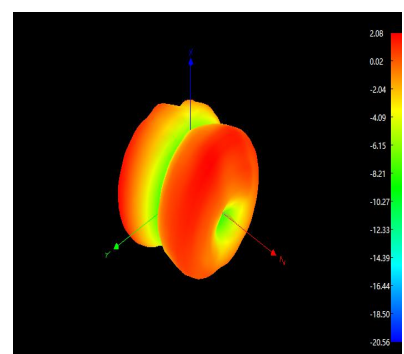




4000

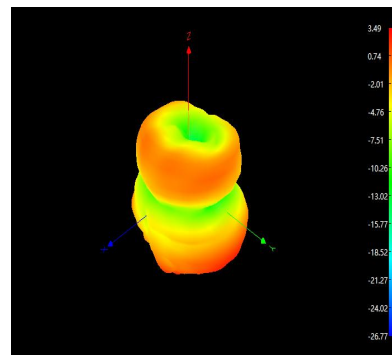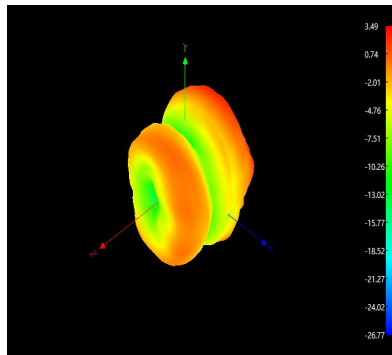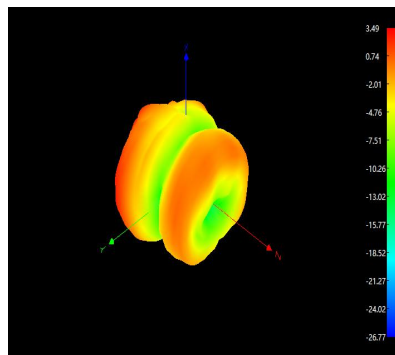




4500

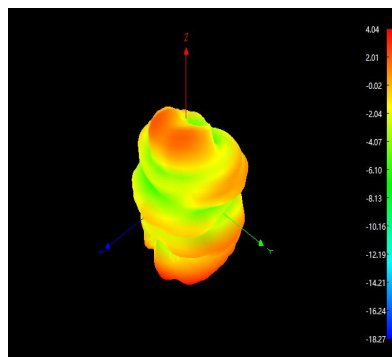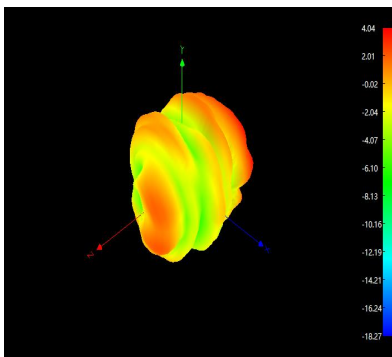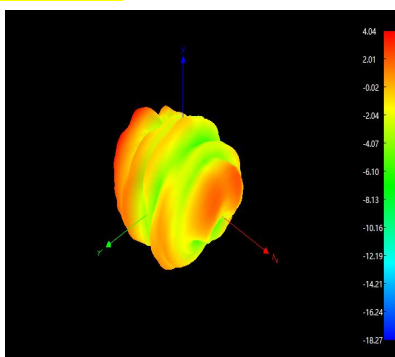

5000

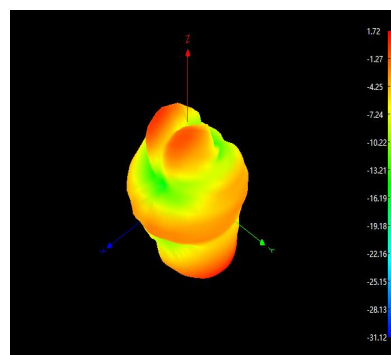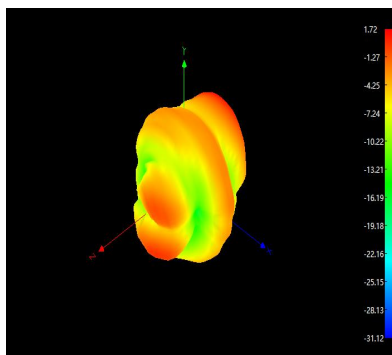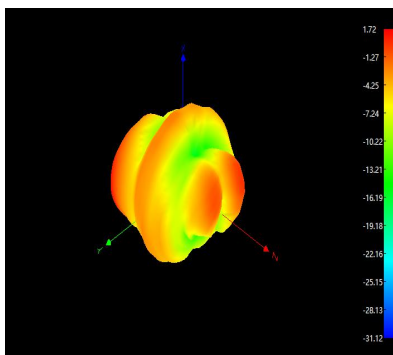

5500

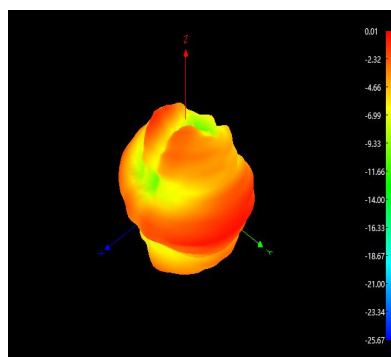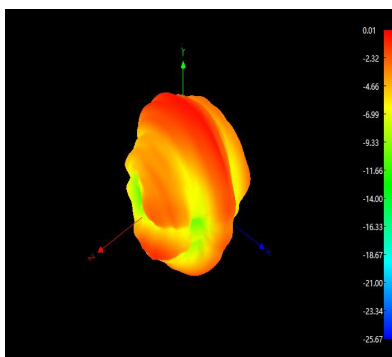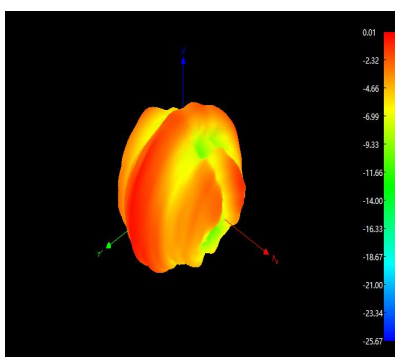

6000

