

Appendix B

Highest Test Plots

Table of Contents

1. 2.4G Body-worn 0mm SAR 3

1. 2.4G Body-worn 0mm SAR

Date: 2.04.2026

Test Laboratory: Guangdong Dongdian Testing Service Co., Ltd.

Q26030330

Serial: S26031615

Communication System: UID 0, SRD (0); Communication System Band: MIC; Frequency: 925.1 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used: $f = 926 \text{ MHz}$; $\sigma = 0.949 \text{ S/m}$; $\epsilon_r = 40.881$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)


DASY Configuration:

- Probe: EX3DV4 - SN3906; ConvF(10.22, 10.22, 10.22) @ 925.1 MHz; Calibrated: 28.05.2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1366; Calibrated: 28.05.2025
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1197
- DASYS2 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/top side 925.1 MHz 3/Area Scan (16x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.272 W/kg

Configuration/top side 925.1 MHz 3/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 13.31 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 1.15 W/kg
SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.052 W/kg
Smallest distance from peaks to all points 3 dB below = 5.8 mm
Ratio of SAR at M2 to SAR at M1 = 45.8%

Maximum value of SAR (measured) = 0.281 W/kg

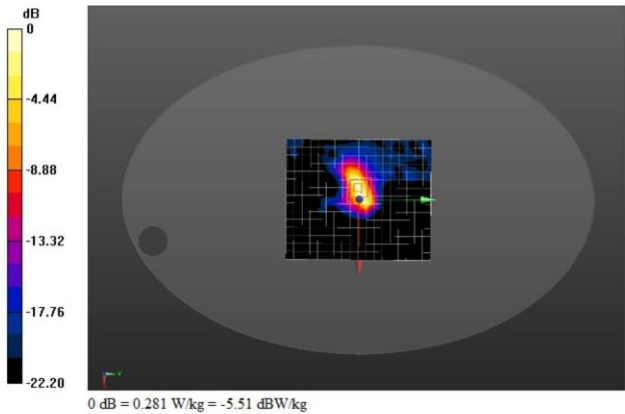

Date: 8.04.2026

Test Laboratory: Guangdong Dongdian Testing Service Co., Ltd.

Q26030330 2.4G

Serial: S26031615

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth; Frequency: 2480 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 2480\text{ MHz}$; $\sigma = 1.788\text{ S/m}$; $\epsilon_r = 38.615$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3906; ComF(7.9, 7.9, 7.9) @ 2480 MHz; Calibrated: 28.05.2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1366; Calibrated: 28.05.2025
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1197
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/top side 2480 ANT1 MHz 11 /Area Scan (16x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.182 W/kg

Configuration/top side 2480 ANT1 MHz 11 /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 10.09 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 0.334 W/kg
SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.059 W/kg
Smallest distance from peaks to all points 3 dB below = 5.4 mm
Ratio of SAR at M2 to SAR at M1 = 38.5%
Maximum value of SAR (measured) = 0.263 W/kg

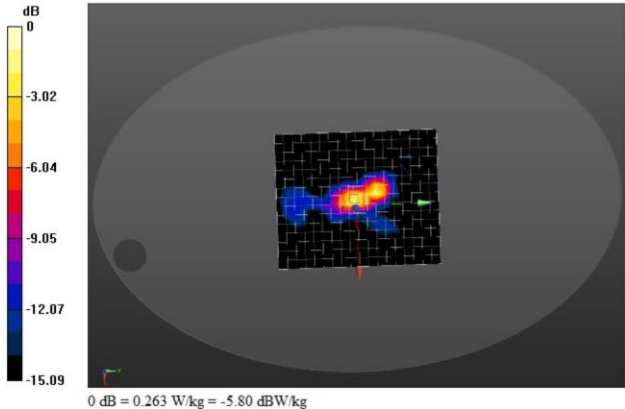

Date: 8.04.2026

Test Laboratory: Guangdong Dongdian Testing Service Co., Ltd.

Q26030330 2.4G

Serial: S26031615

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth; Frequency: 2480 MHz;Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 2480\text{ MHz}$; $\sigma = 1.788\text{ S/m}$; $\epsilon_r = 38.615$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3906; ComF(7.9, 7.9, 7.9) @ 2480 MHz; Calibrated: 28.05.2025
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1366; Calibrated: 28.05.2025
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1197
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/top side 2480 ANT2 MHz 11 /Area Scan (16x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.334 W/kg

Configuration/top side 2480 ANT2 MHz 11 /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.631 V/m; Power Drift = -0.09dB

Peak SAR (extrapolated) = 0.471 W/kg

SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.092 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 41.3%

Maximum value of SAR (measured) = 0.369 W/kg

