



Antenna Passive Measurements in Chamber

Manufacturer	VERO GLOBAL COMMUNICATION CO.,LTD		Antenna type.	PCB Antenna	
Model No	A1	Temperature	24 °C	Humidity	50%


Frequency (MHz)	Efficiency (dB)	Efficiency (%)	Gain (dBi)
2400	-2.0	63.6	1.3
2410	-1.8	65.8	1.5
2420	-1.7	66.9	1.6
2430	-1.9	65.3	1.6
2440	-2.0	63.2	1.5
2450	-2.0	63.2	1.5
2460	-1.9	65.2	1.6
2470	-1.9	64.7	1.5
2480	-1.8	66.3	1.4
2490	-1.6	68.6	1.4
2500	-1.8	66.8	1.1




3D

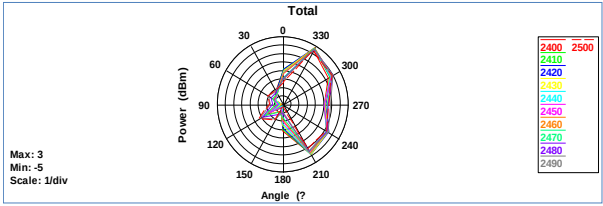


H面




V极化




H极化

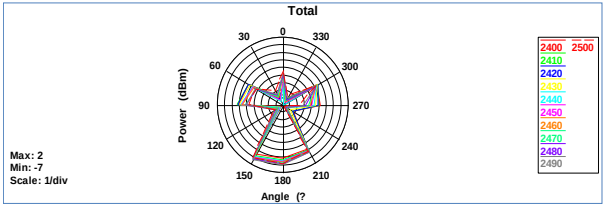


E1面




V极化




H极化

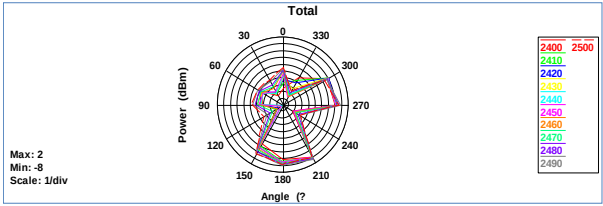


E2面



V极化



H极化

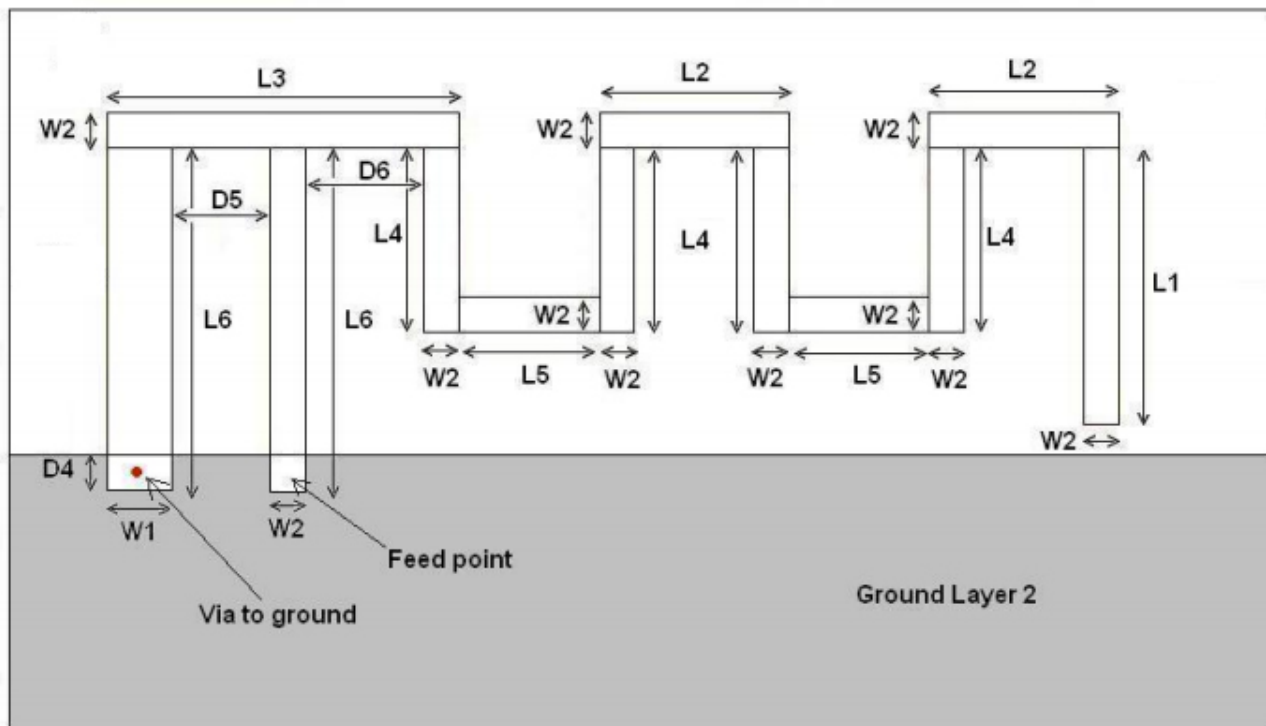

Antenna Dimensions

$L1$	3.94 mm
$L2$	2.70 mm
$L3$	5.00 mm
$L4$	2.64 mm
$L5$	2.00 mm
$L6$	4.90 mm
$W1$	0.90 mm
$W2$	0.50 mm
$D4$	0.50 mm
$D5$	1.40mm
$D6$	1.70 mm