

200W SMART TRANSFORMER

Model No:52625

Input:120VAC 60Hz 1.86A max

Output:12VAC/15VAC 200VA max

3 Channels,Up to 200W per Channel

Caution-Use only with maximum 200 watt lamp load

EFFICIENCY LEVEL VI



WARNING


Risk of fire if installation involves running wire through a building structure, special wiring methods are needed. Consult a qualified electrician.

SUITABLE FOR INDOOR
OR OUTDOOR USE

FCC ID:RGB-MS412W

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)This device may not cause harmful interference,and(2)This device must accept any interference received,including interference that may cause undesired operation.

- For use only with low voltage landscape luminaires and fittings.
- Not for use with dimmers.
- Read Installation Instructions Before Wiring.
- Suitable for wet locations(Do not immerse in water).
- Do not install unit in locations where it may become immersed in water.
- Minimum installation height 1ft (.305m) above ground.
- Keep enclosure cover closed.
- Suitable for Use with Submersible Luminaires or Submersible Pumps.
- This end up.↑

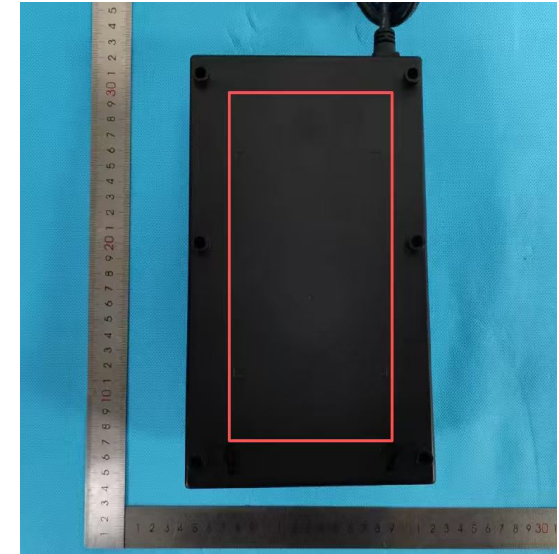

白色不干胶：123X87MM