



## MEASUREMENT REPORT

## FCC PART 15.247 / IC RSS-210 WLAN 802.11a/b/g/n

**Applicant Name:**

Samsung Electronics Co., Ltd.  
416 Maetan 3-Dong, Yeongtong-gu  
Suwon-si, Gyeonggi-do  
443-742, Republic of Korea

**Date of Testing:**

10/23/12 - 12/03/12

**Test Site/Location:**

PCTEST Lab, Columbia, MD, USA

**Test Report Serial No.:**

0Y12102221539.A3L

**FCC ID:**

A3LSCHI925

**APPLICANT:**

Samsung Electronics Co., Ltd.

**Application Type:**

Certification

**Model(s):**

SCH-I925

**EUT Type:**

Portable Tablet

**FCC Classification:**

Digital Transmission System (DTS)

**FCC Rule Part(s):**

Part 15.247

**IC Specification(s):**

RSS-210 Issue 8

**Test Procedure(s):**

ANSI C63.10-2009, KDB 558074 V.01

| Mode            | Tx Frequency (MHz) | Avg Conducted   |                  | Peak Conducted  |                  |
|-----------------|--------------------|-----------------|------------------|-----------------|------------------|
|                 |                    | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) |
| 802.11b         | 2412 - 2462        | 25.823          | 14.12            | 46.666          | 16.69            |
| 802.11g         | 2412 - 2462        | 24.717          | 13.93            | 140.605         | 21.48            |
| 802.11n         | 2412 - 2462        | 23.933          | 13.79            | 115.611         | 20.63            |
| 802.11a         | 5745 - 5825        | 24.660          | 13.92            | 79.068          | 18.98            |
| 802.11n (20MHz) | 5745 - 5825        | 23.227          | 13.66            | 86.497          | 19.37            |
| 802.11n (40MHz) | 5755 - 5795        | 12.735          | 11.05            | 82.224          | 19.15            |

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2009, and KDB 558074. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.



Randy Ortanez  
President



|                                       |                                                                                     |                                                                    |                                                                                       |                                 |
|---------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSCHI925                    |  | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12                                                  | EUT Type:<br>Portable Tablet                                       |                                                                                       | Page 1 of 60                    |

## TABLE OF CONTENTS

|                                                          |    |
|----------------------------------------------------------|----|
| FCC PART 15.247 MEASUREMENT REPORT .....                 | 3  |
| 1.0 INTRODUCTION.....                                    | 4  |
| 1.1 SCOPE.....                                           | 4  |
| 1.2 PCTEST TEST LOCATION.....                            | 4  |
| 2.0 PRODUCT INFORMATION .....                            | 5  |
| 2.1 EQUIPMENT DESCRIPTION.....                           | 5  |
| 2.2 DEVICE CAPABILITIES .....                            | 5  |
| 2.3 TEST CONFIGURATION .....                             | 5  |
| 2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....         | 5  |
| 2.5 LABELING REQUIREMENTS.....                           | 5  |
| 3.0 DESCRIPTION OF TEST .....                            | 6  |
| 3.1 EVALUATION PROCEDURE.....                            | 6  |
| 3.2 AC LINE CONDUCTED EMISSIONS.....                     | 6  |
| 3.3 RADIATED EMISSIONS .....                             | 7  |
| 4.0 ANTENNA REQUIREMENTS .....                           | 8  |
| 5.0 TEST EQUIPMENT CALIBRATION DATA.....                 | 9  |
| 6.0 TEST RESULTS .....                                   | 10 |
| 6.1 SUMMARY .....                                        | 10 |
| 6.2 6DB BANDWIDTH MEASUREMENT – 802.11A/B/G/N.....       | 11 |
| 6.3 OUTPUT POWER MEASUREMENT – 802.11B/G/N (2.4GHZ)..... | 21 |
| 6.4 OUTPUT POWER MEASUREMENT – 802.11A/N (5GHZ) .....    | 22 |
| 6.5 POWER SPECTRAL DENSITY (802.11A/B/G/N).....          | 23 |
| 6.6 CONDUCTED EMISSIONS AT THE BAND EDGE.....            | 33 |
| 6.7 CONDUCTED SPURIOUS EMISSIONS.....                    | 40 |
| 6.8 RADIATED SPURIOUS EMISSION MEASUREMENTS.....         | 47 |
| 6.9 RADIATED RESTRICTED BAND EDGE MEASUREMENTS .....     | 54 |
| 6.10 LINE-CONDUCTED TEST DATA.....                       | 56 |
| 7.0 CONCLUSION .....                                     | 60 |

|                                       |                                                                                     |                                                                    |                                                                                       |                                 |
|---------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSCHI925                    |  | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12                                                  | EUT Type:<br>Portable Tablet                                       |                                                                                       | Page 2 of 60                    |



# MEASUREMENT REPORT

## FCC Part 15.247



### § 2.1033 General Information

**APPLICANT:** Samsung Electronics Co., Ltd.

**APPLICANT ADDRESS:** 416 Maetan 3-Dong, Yeongtong-gu  
Suwon-si, Gyeonggi-do, 443-742 , Republic of Korea

**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.

**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21046 USA

**FCC RULE PART(S):** Part 15.247

**IC SPECIFICATION(S):** RSS-210 Issue 8

**MODEL NAME:** SCH-I925

**FCC ID:** A3LSCHI925

**Test Device Serial No.:** FCC #H BT/WIFI ☐ Production ☒ Pre-Production ☐ Engineering  
FCC #G BT/WIFI


**FCC CLASSIFICATION:** Digital Transmission System (DTS)

**DATE(S) OF TEST:** 10/23/12 - 12/03/12

**TEST REPORT S/N:** 0Y12102221539.A3L

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

|                                              |                                                                                     |                                                                        |                                                                                       |                                        |
|----------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSCHI925                    |  | <b>FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT (CERTIFICATION)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y12102221539.A3L | <b>Test Dates:</b><br>10/23/12 - 12/03/12                                           | <b>EUT Type:</b><br>Portable Tablet                                    |                                                                                       | Page 3 of 60                           |

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

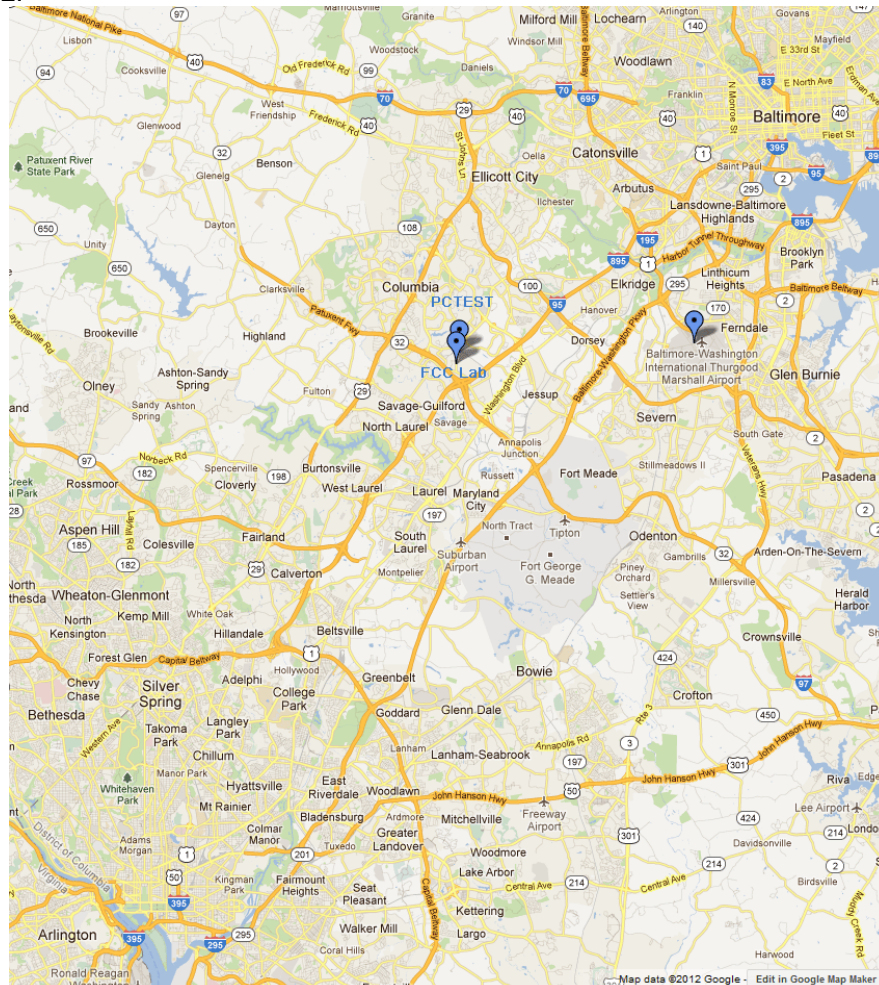


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

|                                       |                                               |                                                                    |                |                                 |
|---------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSCHI925                    | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12            | EUT Type:<br>Portable Tablet                                       |                | Page 4 of 60                    |

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Tablet FCC ID: A3LSCHI925**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN transmitter.

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A (BC0, BC1), 850/1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, Band 4 (5/10/15/20 MHz BW), Band 13 (10MHz BW) LTE, 802.11a/b/g/n WLAN (DTS/NII), Bluetooth (1x,EDR, LE)

**Note:** 5GHz WLAN (DTS/NII) operation is possible in 20MHz and 40MHz channel bandwidths.

### 2.3 Test Configuration

The Samsung Portable Tablet FCC ID: A3LSCHI925 was tested per the guidance of ANSI C63.10-2009 and KDB 558074. See Sections 3.2, 3.3, and 6.1 of this test report for a description of the AC line conducted emissions, radiated emissions, and antenna port conducted emissions test setups, respectively.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

### 2.5 Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

|                                       |                                                                                     |                                                                    |                                                                                       |                                 |
|---------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSCHI925                    |  | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12                                                  | EUT Type:<br>Portable Tablet                                       |                                                                                       | Page 5 of 60                    |

## 3.0 DESCRIPTION OF TEST

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009), and the guidance provided in KDB 558074 were used in the measurement of the **Samsung Portable Tablet FCC ID: A3LSCHI925**.

Deviation from measurement procedure.....None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 6.10. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 8.51.0.

|                                       |                                                                                     |                                                                    |                                                                                       |                                 |
|---------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSCHI925                    |  | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12                                                  | EUT Type:<br>Portable Tablet                                       |                                                                                       | Page 6 of 60                    |

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by varying: the mode of operation or resolution, clock or data rate, scrolling H pattern to the EUT and/or support equipment, and changing the polarity of the receive antenna, whichever produced the worst-case emissions. To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120kHz for frequencies below 1GHz or 1MHz for frequencies above 1GHz. For average measurements above 1GHz, measurement procedure "RBAVG1" in Section 5.4.2.2.2.1 of KDB 558074 was used.

|                                       |                                                                                     |                                                                    |                                                                                       |                                 |
|---------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSCHI925                    |  | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12                                                  | EUT Type:<br>Portable Tablet                                       | Page 7 of 60                                                                          |                                 |

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Tablet are **permanently attached**.
- There are no provisions for connection to an external antenna.

### Conclusion:

The **Samsung Portable Tablet FCC ID: A3LSCHI925** unit complies with the requirement of §15.203.

| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
|-----|-----------------|-----|-----------------|
| 1   | 2412            | 7   | 2442            |
| 2   | 2417            | 8   | 2447            |
| 3   | 2422            | 9   | 2452            |
| 4   | 2427            | 10  | 2457            |
| 5   | 2432            | 11  | 2462            |
| 6   | 2437            |     |                 |

| Ch. | BW (MHz) | Frequency (MHz) |
|-----|----------|-----------------|
| 149 | 20       | 5745            |
| 151 | 20 / 40  | 5755            |
| 153 | 20       | 5765            |
| 155 | 20       | 5775            |
| 157 | 20       | 5785            |

| Ch. | BW (MHz) | Frequency (MHz) |
|-----|----------|-----------------|
| 159 | 20 / 40  | 5795            |
| 161 | 20       | 5805            |
| 163 | 20       | 5815            |
| 165 | 20       | 5825            |
|     |          |                 |

Table 4-1. Frequency/ Channel Operations

|                                       |                                                                                     |                                                                    |                                                                                       |                                 |
|---------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSCHI925                    |  | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12                                                  | EUT Type:<br>Portable Tablet                                       |                                                                                       | Page 8 of 60                    |

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

| Manufacturer      | Model            | Description                            | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|-------------------|------------------|----------------------------------------|------------|--------------|------------|---------------|
| -                 | RE1              | Radiated Emissions Cable Set (UHF/EHF) | 7/10/2012  | Annual       | 7/10/2013  | N/A           |
| -                 | WL25-1           | Conducted Cable Set (25GHz)            | 2/13/2012  | Annual       | 2/13/2013  | N/A           |
| -                 | 40G-1R           | 40GHz Radiated Cable Set               | 2/23/2012  | Annual       | 2/23/2013  | N/A           |
| -                 | WL40-1           | Conducted Cable Set (40GHz)            | 2/24/2012  | Annual       | 2/24/2013  | N/A           |
| Agilent           | 8447D            | Broadband Amplifier                    | 5/8/2012   | Annual       | 5/8/2013   | 2443A01900    |
| Agilent           | E4448A           | PSA (3Hz-50GHz) Spectrum Analyzer      | 2/15/2012  | Annual       | 2/15/2013  | US42510244    |
| Agilent           | N9020A           | MXA Signal Analyzer                    | 10/9/2012  | Annual       | 10/9/2013  | US46470561    |
| Anritsu           | MA2411B          | Pulse Sensor                           | 9/19/2012  | Annual       | 9/19/2013  | 1027293       |
| Anritsu           | ML2495A          | Power Meter                            | 10/11/2012 | Annual       | 10/11/2013 | 1039008       |
| Com-Power         | AL-130           | 9kHz - 30MHz Loop Antenna              | 5/10/2012  | Annual       | 5/10/2013  | 121034        |
| ETS Lindgren      | 3117             | 1-18 GHz DRG Horn (Medium)             | 7/22/2011  | Biennial     | 7/22/2013  | 125518        |
| ETS Lindgren      | 3160-09          | 18-26.5 GHz Standard Gain Horn         | 5/30/2012  | Biennial     | 5/30/2014  | 135427        |
| ETS Lindgren      | 3160-10          | 26.5-40 GHz Standard Gain Horn         | 6/6/2012   | Biennial     | 6/6/2014   | 130993        |
| Mini-Circuits     | VHF-3100+        | High Pass Filter                       | 1/15/2012  | Annual       | 1/15/2013  | 30841         |
| Mini-Circuits     | VHF-8400+        | 3.4GHz - 9.9GHz High Pass Filter       | 2/28/2012  | Annual       | 2/28/2013  | 31048         |
| Rohde & Schwarz   | TS-PR18          | 1-18 GHz Pre-Amplifier                 | 6/26/2012  | Annual       | 6/26/2013  | 100071        |
| Rohde & Schwarz   | TS-PR26          | 18-26.5 GHz Pre-Amplifier              | 5/30/2012  | Annual       | 5/30/2013  | 100040        |
| Rohde & Schwarz   | ESU26            | EMI Test Receiver                      | 12/15/2011 | Annual       | 12/15/2012 | 100342        |
| Rohde & Schwarz   | TS-PR40          | 26.5-40 GHz Pre-Amplifier              | 6/6/2012   | Annual       | 6/6/2013   | 100037        |
| Solar Electronics | 8012-50-R-24-BNC | LISN                                   | 6/23/2011  | Biennial     | 6/23/2013  | 310233        |
| Sunol             | JB5              | Bi-Log Antenna (30M - 5GHz)            | 1/26/2012  | Biennial     | 1/26/2014  | A051107       |

**Table 5-1. Annual Test Equipment Calibration Schedule**

|                                       |                                                                                     |                                                                    |                                                                                       |                                 |
|---------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSCHI925                    |  | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12                                                  | EUT Type:<br>Portable Tablet                                       | Page 9 of 60                                                                          |                                 |

## 6.0 TEST RESULTS

### 6.1 Summary

Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSCHI925  
 FCC Classification: Digital Transmission System (DTS)  
 Data Rate(s) Tested: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)  
6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (a/g)  
6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps,  
52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n – 20MHz)  
13.5/15Mbps, 27/30Mbps, 40.5/45Mbps, 54/60Mbps, 81/90Mbps, 108/120Mbps,  
121.5/135Mbps, 135/150Mbps (n – 40MHz)

| FCC Part Section(s)                           | RSS Section(s)    | Test Description                                                               | Test Limit                                                                     | Test Condition                      | Test Result | Reference            |
|-----------------------------------------------|-------------------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------------|-------------------------------------|-------------|----------------------|
| <b>TRANSMITTER MODE (TX)</b>                  |                   |                                                                                |                                                                                |                                     |             |                      |
| 15.247(a)(2)                                  | RSS-210 [A8.2]    | 6dB Bandwidth                                                                  | > 500kHz                                                                       | CONDUCTED                           | PASS        | Section 6.2          |
| 15.247(b)(3)                                  | RSS-210 [A8.4]    | Transmitter Output Power                                                       | < 1 Watt                                                                       |                                     | PASS        | Sections 6.3, 6.4    |
| 15.247(e)                                     | RSS-210 [A8.2]    | Transmitter Power Spectral Density                                             | < 8dBm / 3kHz Band                                                             |                                     | PASS        | Section 6.5          |
| 15.247(d)                                     | RSS-210 [A8.5]    | Band Edge / Out-of-Band Emissions                                              | Conducted ≥ 30dBc                                                              |                                     | PASS        | Sections 6.6, 6.7    |
| 15.205<br>15.209                              | RSS-210 [A8.5]    | General Field Strength Limits (Restricted Bands and Radiated Emission Limits)  | Emissions in restricted bands must meet the radiated limits detailed in 15.209 | RADIATED                            | PASS        | Sections 6.8, 6.9    |
| 15.207                                        | RSS-Gen [7.2.2]   | AC Conducted Emissions 150kHz – 30MHz                                          | < FCC 15.207 limits                                                            | LINE CONDUCTED                      | PASS        | Section 6.10         |
| <b>RECEIVER MODE (RX) / DIGITAL EMISSIONS</b> |                   |                                                                                |                                                                                |                                     |             |                      |
| 15.107                                        | RSS-Gen [7.2.2]   | AC Conducted Emissions 150kHz – 30MHz                                          | < FCC 15.107 limits                                                            | LINE CONDUCTED                      | PASS        | Part 15B Test Report |
| 15.109                                        | RSS-Gen [7.2.3.2] | General Field Strength Limits (Restricted Bands and Radiated Emissions Limits) | < FCC 15.109 limits                                                            | RADIATED (30MHz-1GHz)<br>(1-25 GHz) | PASS        | Part 15B Test Report |

**Table 6-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

|                                       |                                                                                     |                                                                    |                                                                                       |                                 |
|---------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSCHI925                    |  | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12                                                  | EUT Type:<br>Portable Tablet                                       | Page 10 of 60                                                                         |                                 |


## 6.2 6dB Bandwidth Measurement – 802.11a/b/g/n

### §15.247(a)(2); RSS-210 [A8.2]

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies. **The minimum permissible 6dB bandwidth is 500 kHz.**


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] | Pass / Fail |
|-----------------|-------------|-------------|------------------|--------------------------|-------------------------|-------------|
| 2412            | 1           | b           | 1                | 9.115                    | 0.500                   | Pass        |
| 2437            | 6           | b           | 1                | 9.093                    | 0.500                   | Pass        |
| 2462            | 11          | b           | 1                | 9.091                    | 0.500                   | Pass        |
| 2412            | 1           | g           | 6                | 16.14                    | 0.500                   | Pass        |
| 2437            | 6           | g           | 6                | 15.73                    | 0.500                   | Pass        |
| 2462            | 11          | g           | 6                | 16.03                    | 0.500                   | Pass        |
| 2412            | 1           | n           | 6.5/7.2 (MCS0)   | 17.48                    | 0.500                   | Pass        |
| 2437            | 6           | n           | 6.5/7.2 (MCS0)   | 17.13                    | 0.500                   | Pass        |
| 2462            | 11          | n           | 6.5/7.2 (MCS0)   | 17.50                    | 0.500                   | Pass        |
| 5745            | 149         | a           | 6                | 15.52                    | 0.500                   | Pass        |
| 5785            | 157         | a           | 6                | 15.55                    | 0.500                   | Pass        |
| 5825            | 165         | a           | 6                | 15.63                    | 0.500                   | Pass        |
| 5745            | 149         | n (20MHz)   | 6.5/7.2 (MCS0)   | 17.45                    | 0.500                   | Pass        |
| 5785            | 157         | n (20MHz)   | 6.5/7.2 (MCS0)   | 17.35                    | 0.500                   | Pass        |
| 5825            | 165         | n (20MHz)   | 6.5/7.2 (MCS0)   | 17.18                    | 0.500                   | Pass        |
| 5755            | 151         | n (40MHz)   | 13.5/15 (MCS0)   | 36.62                    | 0.500                   | Pass        |
| 5795            | 159         | n (40MHz)   | 13.5/15 (MCS0)   | 36.59                    | 0.500                   | Pass        |

**Table 6-2. Conducted Bandwidth Measurements**




**Figure 6-1. Test Instrument & Measurement Setup**

|                                       |                                                                                     |                                                                    |                                                                                       |                                 |
|---------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSCHI925                    |  | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12                                                  | EUT Type:<br>Portable Tablet                                       |                                                                                       | Page 11 of 60                   |

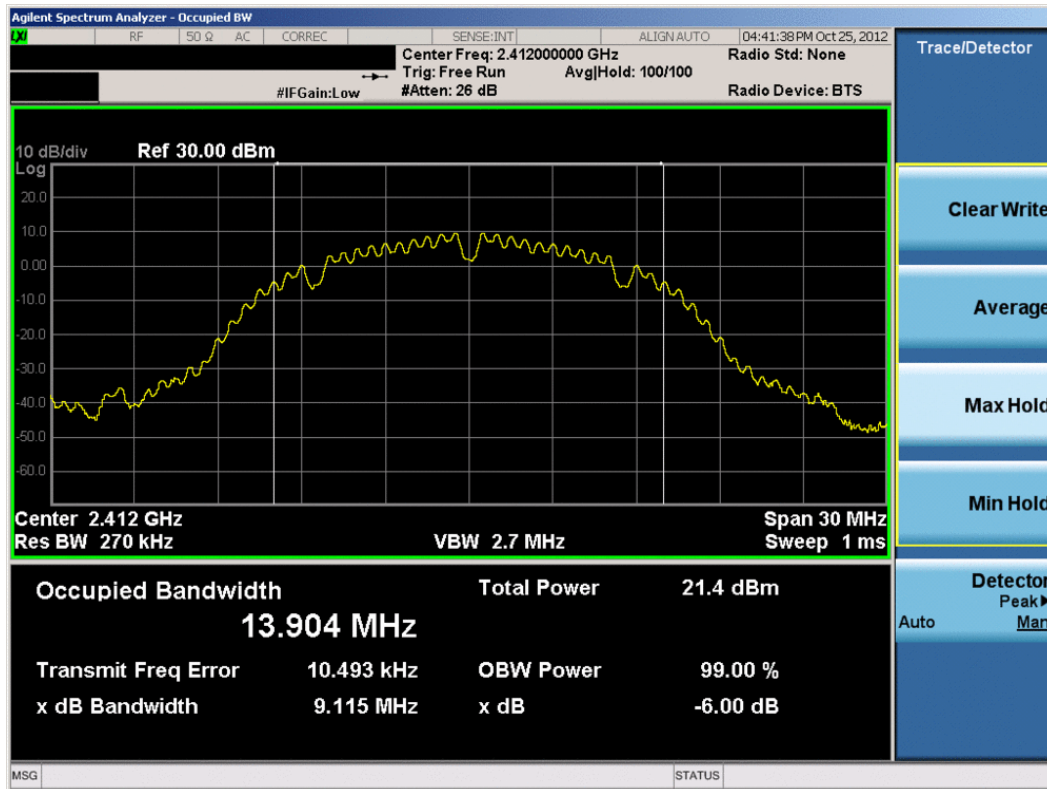


Plot 6-1. 6dB Bandwidth Plot (802.11b – Ch. 1)

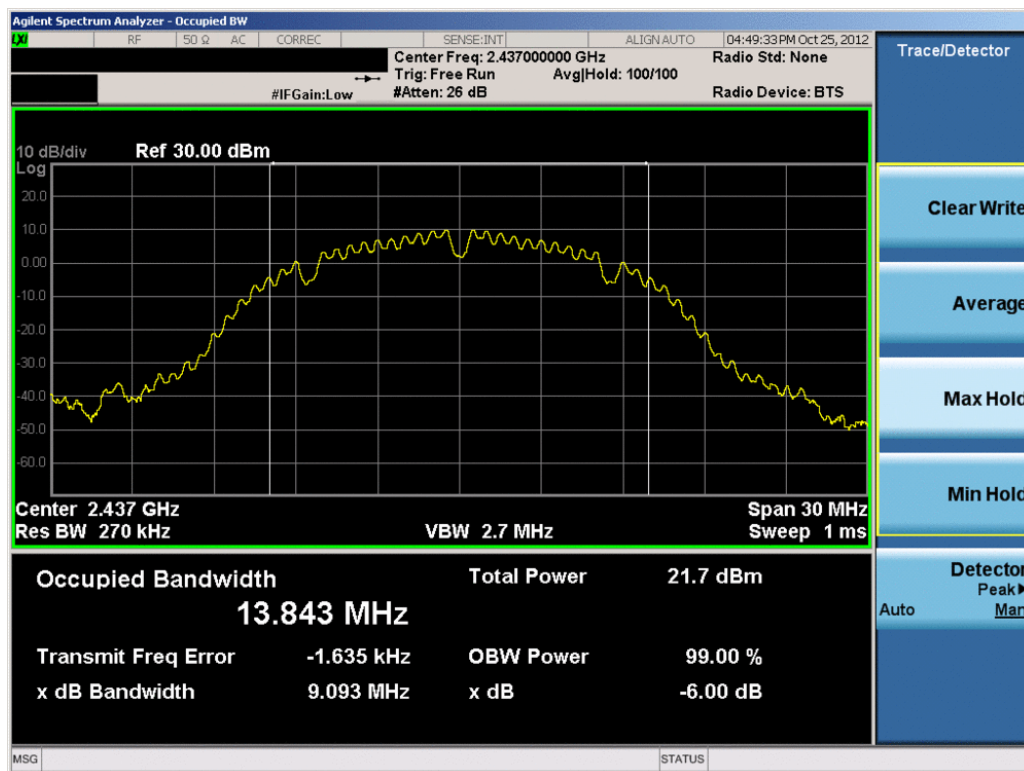


Plot 6-2. 6dB Bandwidth Plot (802.11b – Ch. 6)

|                                       |                                               |                                                                    |                |                                 |
|---------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSCHI925                    | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12            | EUT Type:<br>Portable Tablet                                       |                | Page 12 of 60                   |

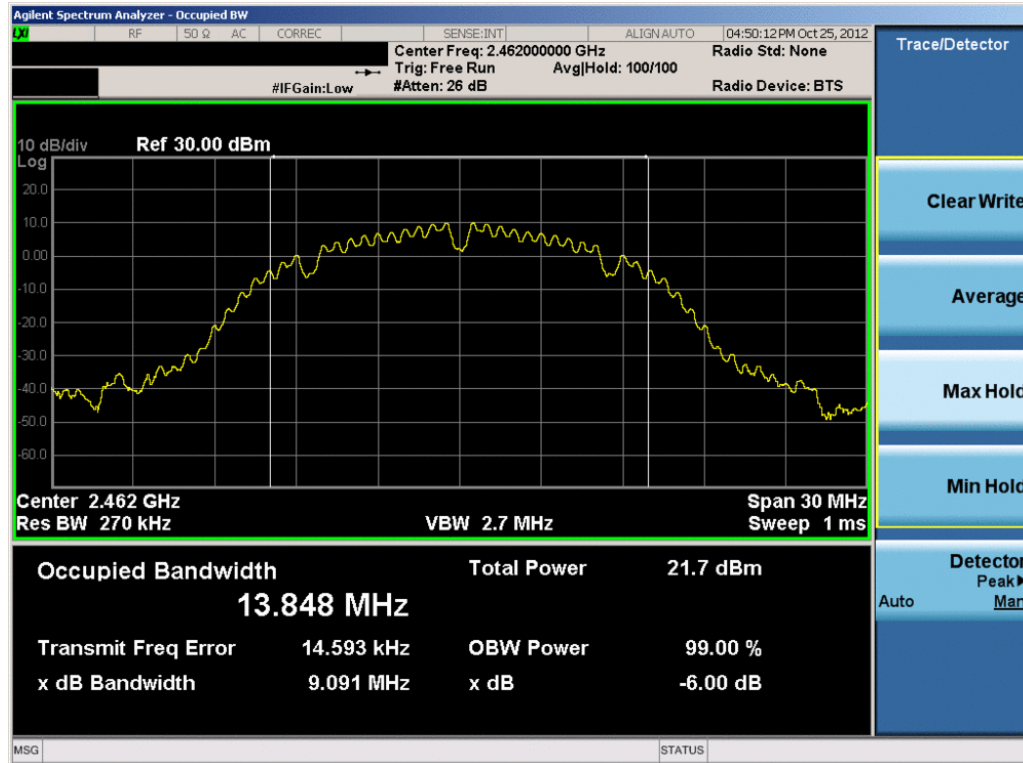


Plot 6-3. 6dB Bandwidth Plot (802.11b – Ch. 11)

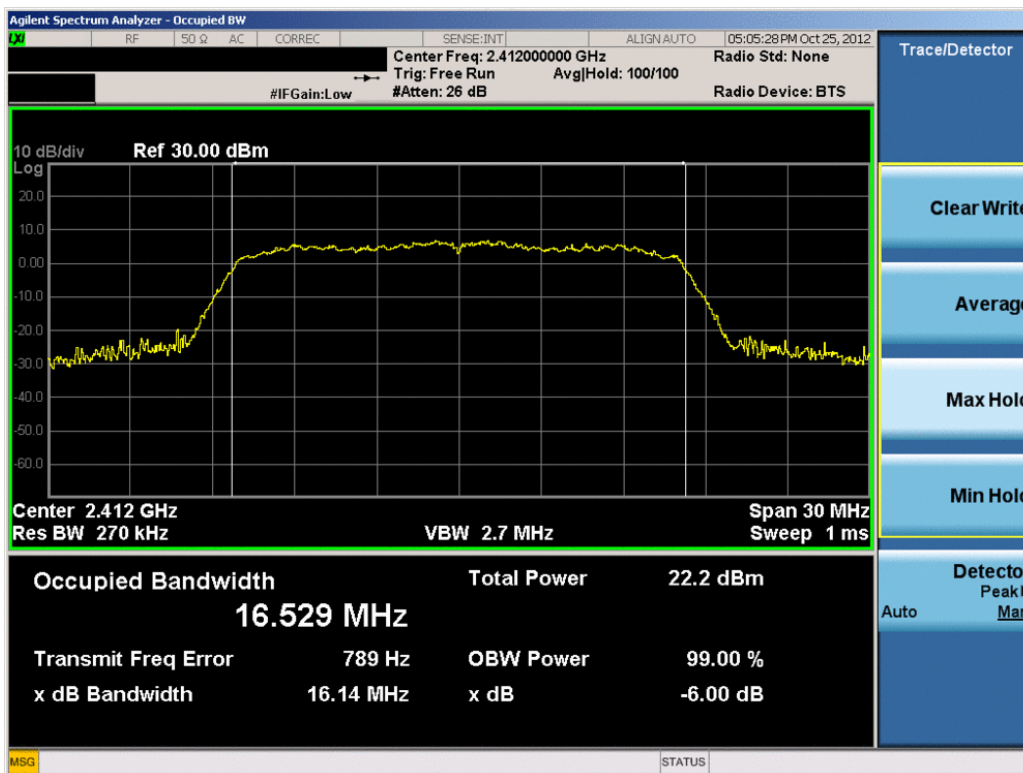


Plot 6-4. 6dB Bandwidth Plot (802.11g – Ch. 1)

|                                       |                                               |                                                                    |                |                                 |
|---------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSCHI925                    | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12            | EUT Type:<br>Portable Tablet                                       |                | Page 13 of 60                   |

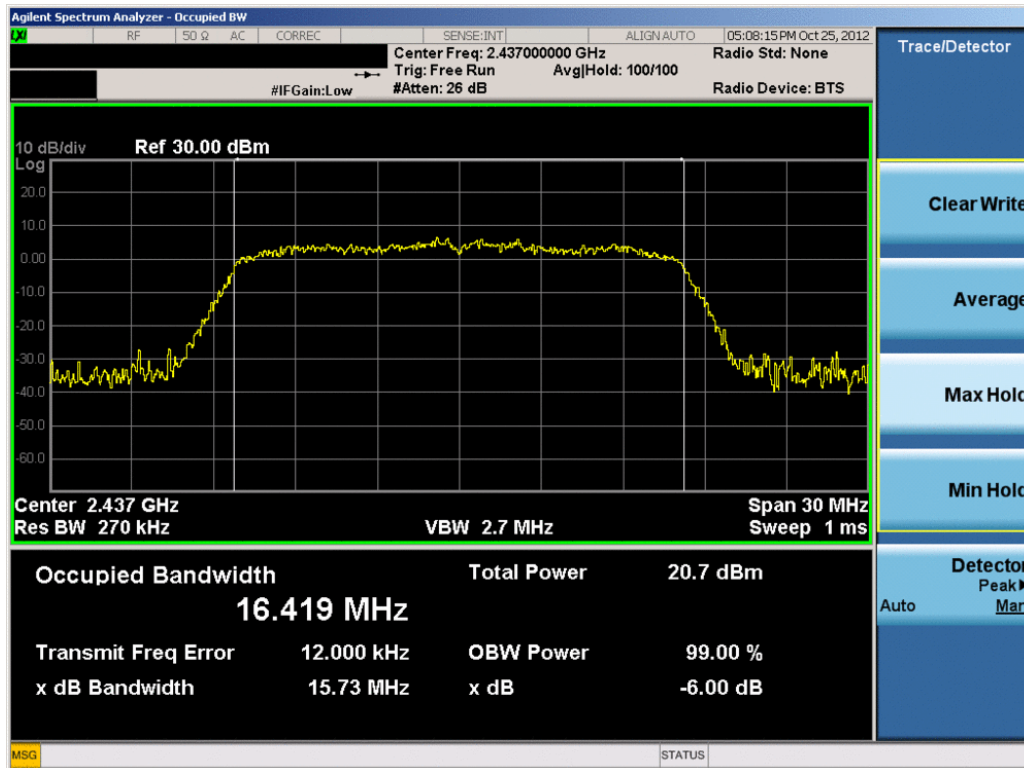


Plot 6-5. 6dB Bandwidth Plot (802.11g – Ch. 6)

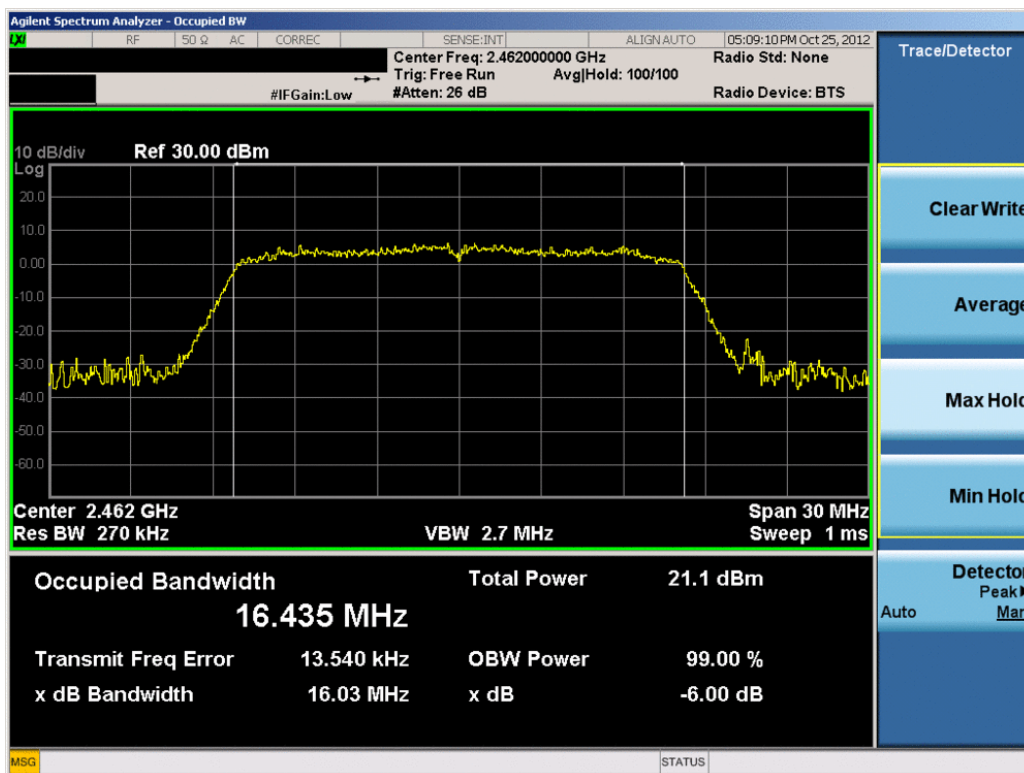


Plot 6-6. 6dB Bandwidth Plot (802.11g – Ch. 11)

|                                       |                                               |                                                                    |                |                                 |
|---------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSCHI925                    | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12            | EUT Type:<br>Portable Tablet                                       |                | Page 14 of 60                   |

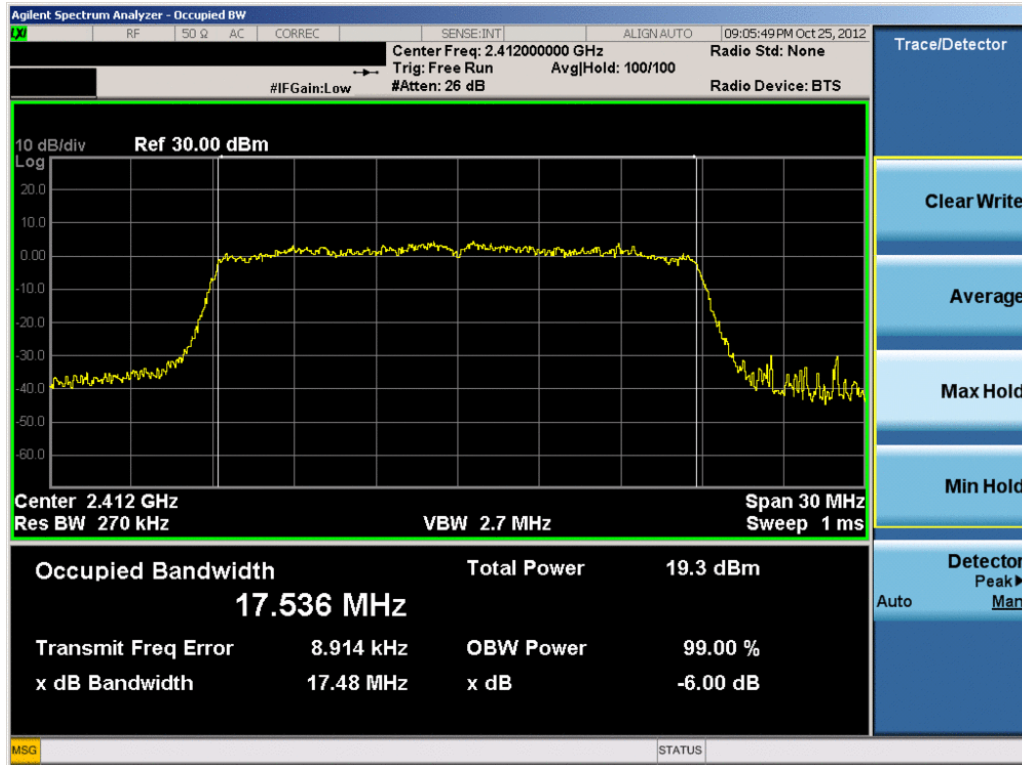


Plot 6-7. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 1)

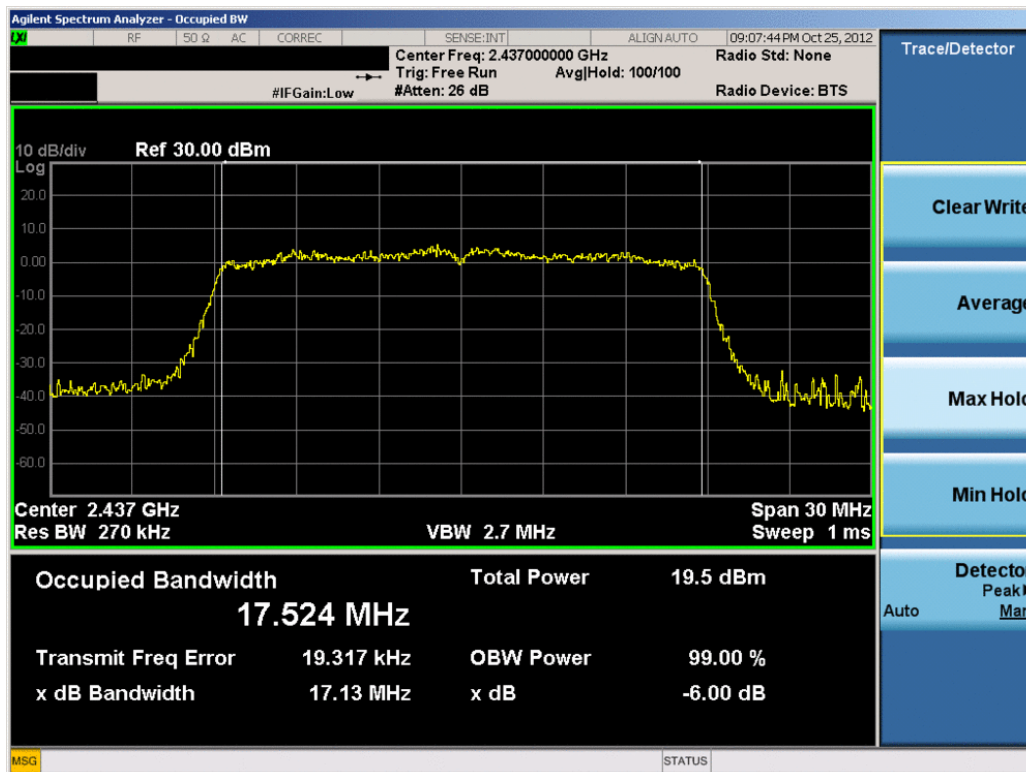


Plot 6-8. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 6)

|                                       |                                               |                                                                    |                |                                 |
|---------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSCHI925                    | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12            | EUT Type:<br>Portable Tablet                                       |                | Page 15 of 60                   |

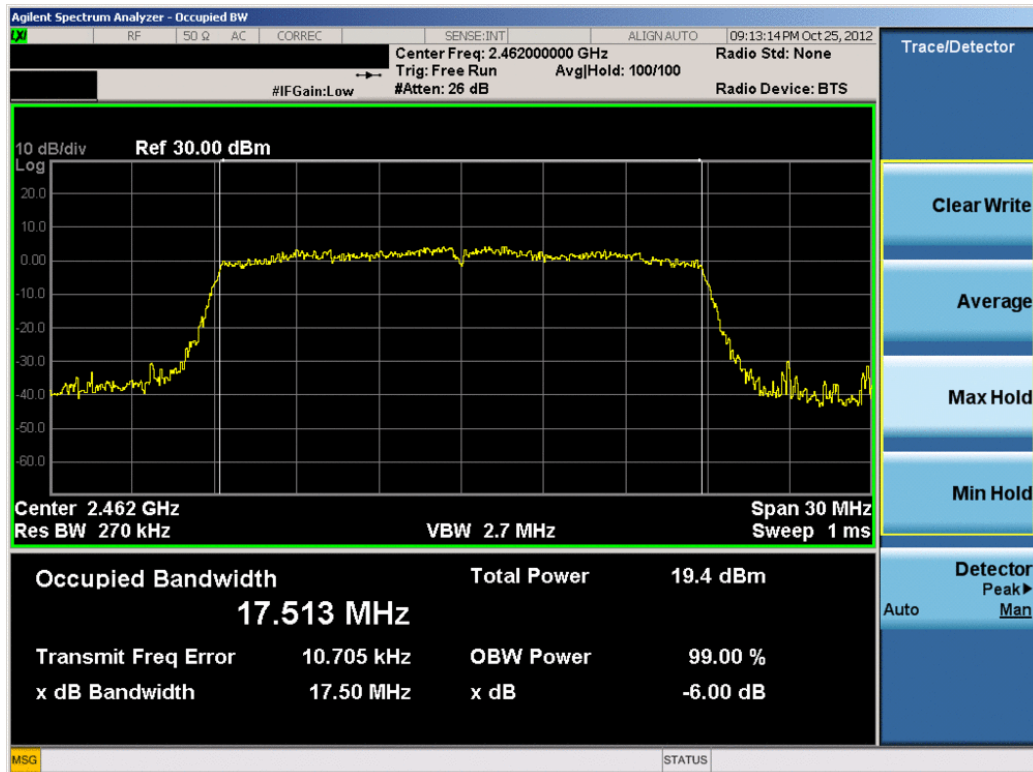


Plot 6-9. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 11)

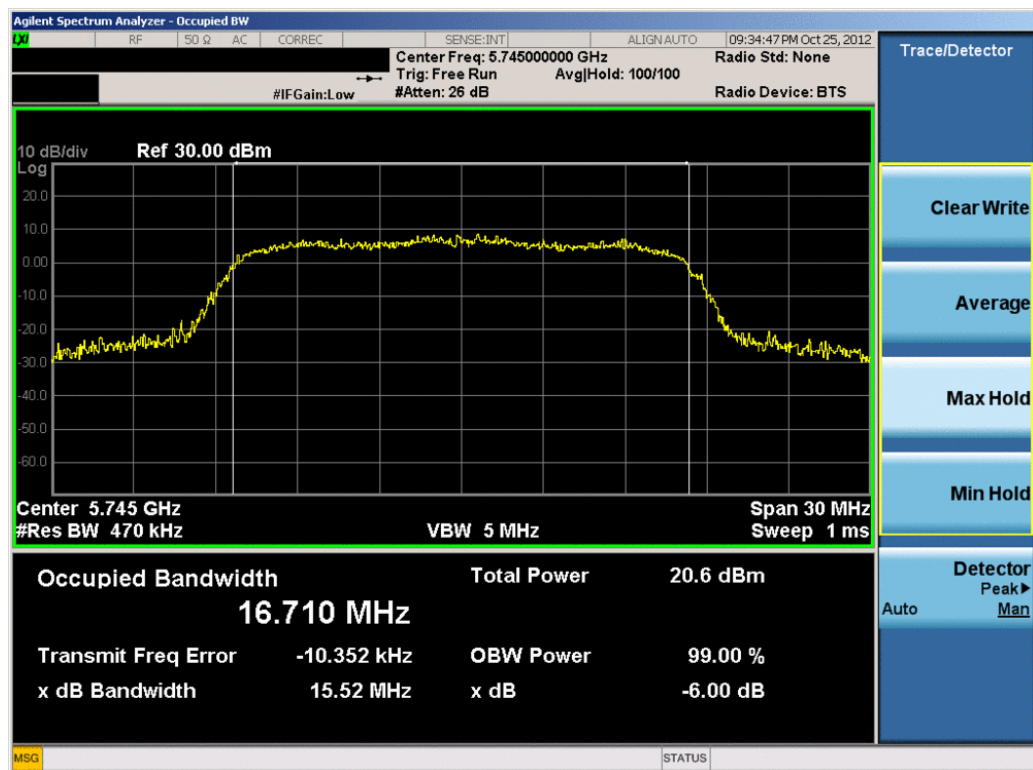


Plot 6-10. 6dB Bandwidth Plot (802.11a – Ch. 149)

|                                       |                                               |                                                                    |                |                                 |
|---------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSCHI925                    | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12            | EUT Type:<br>Portable Tablet                                       |                | Page 16 of 60                   |

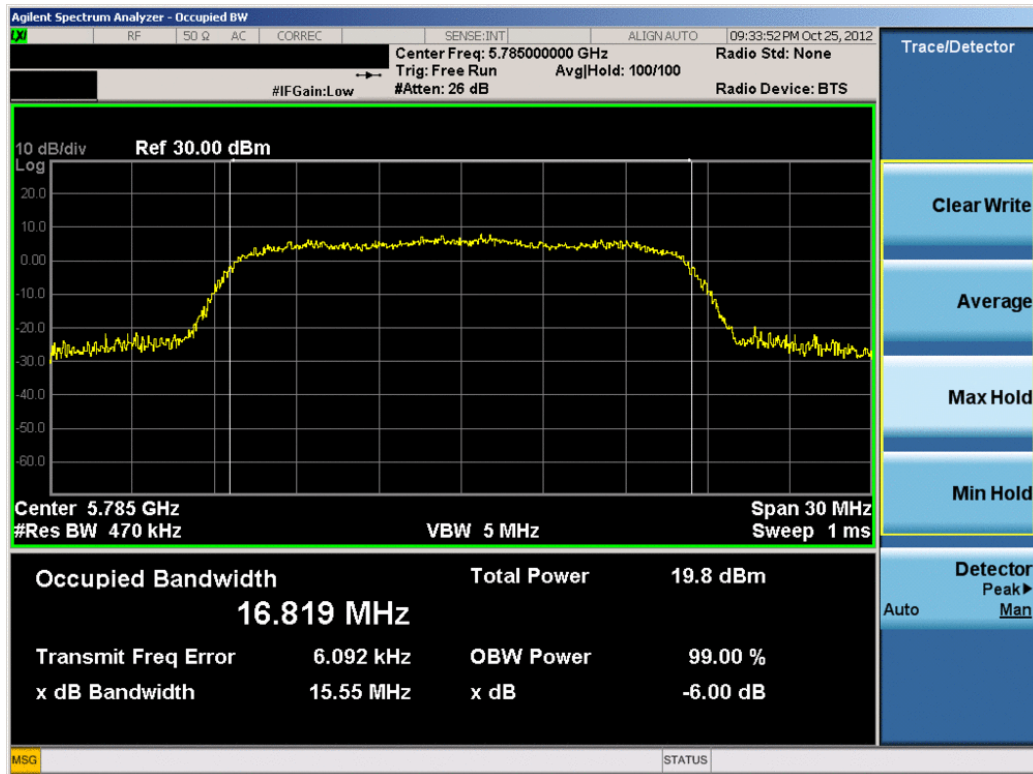


Plot 6-11. 6dB Bandwidth Plot (802.11a – Ch. 157)

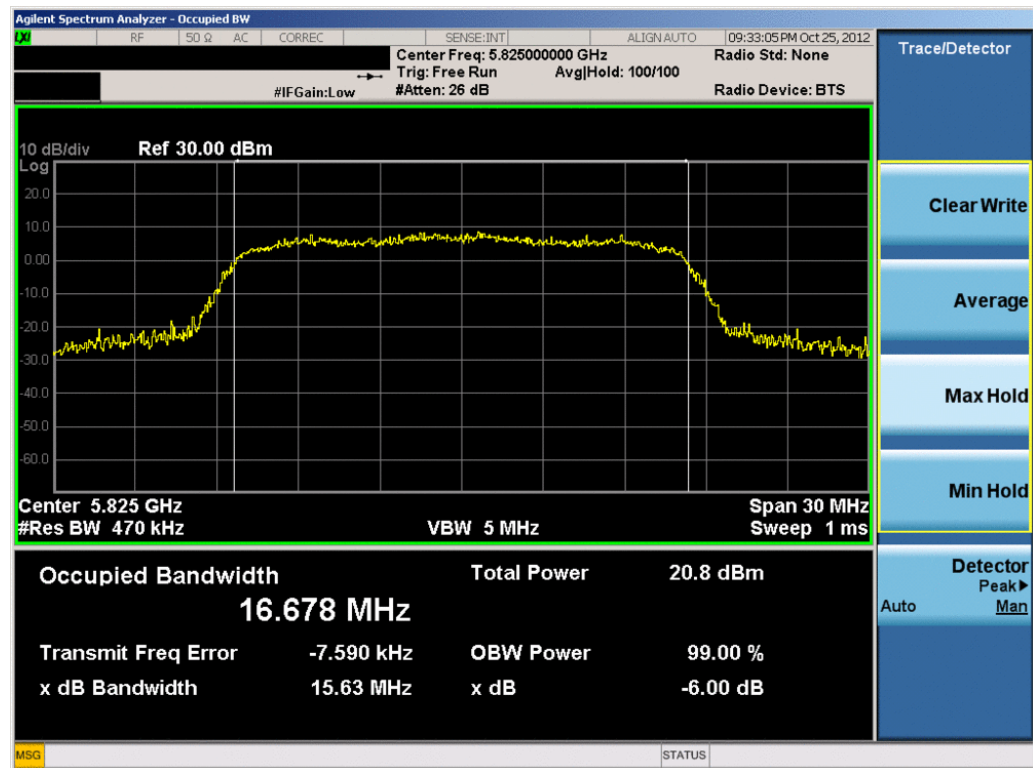


Plot 6-12. 6dB Bandwidth Plot (802.11a – Ch. 165)

|                                       |                                               |                                                                    |                |                                 |
|---------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSCHI925                    | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12            | EUT Type:<br>Portable Tablet                                       |                | Page 17 of 60                   |

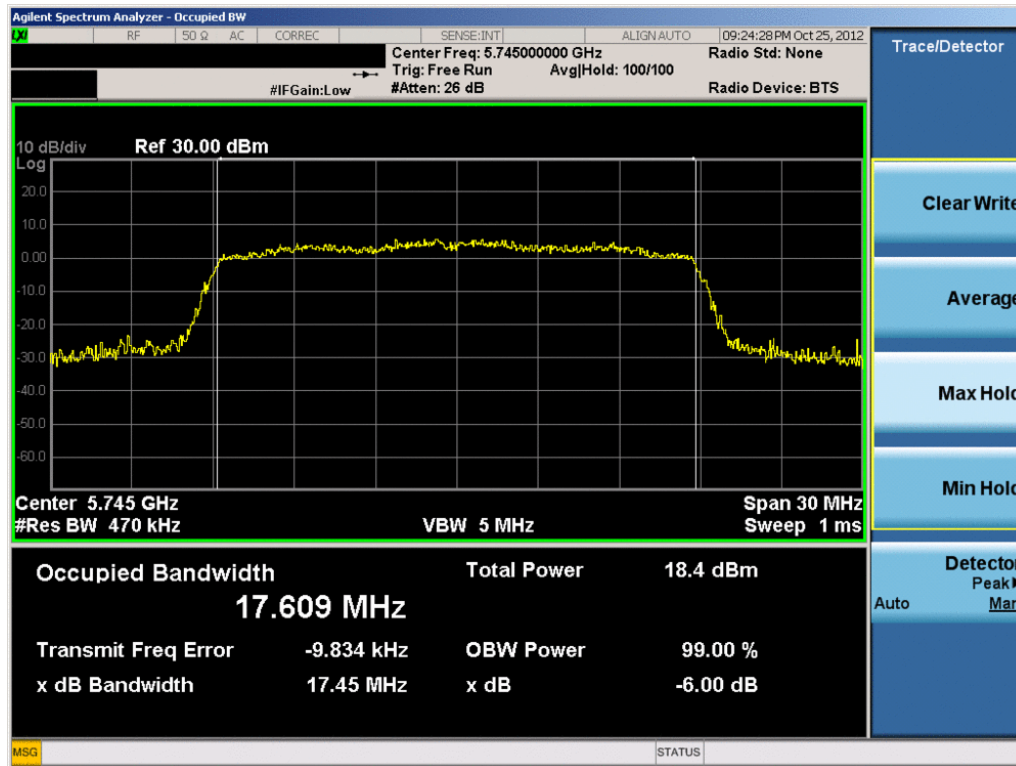


Plot 6-13. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

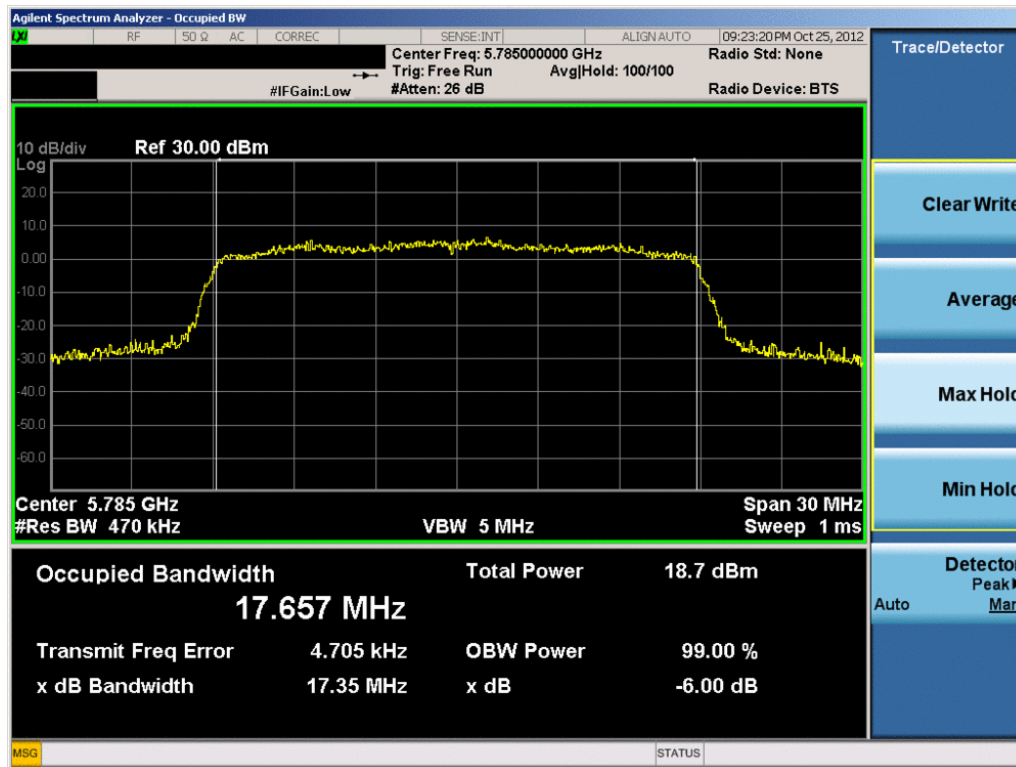


Plot 6-14. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 157)

|                                       |                                               |                                                                    |                |                                 |
|---------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSCHI925                    | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12            | EUT Type:<br>Portable Tablet                                       |                | Page 18 of 60                   |

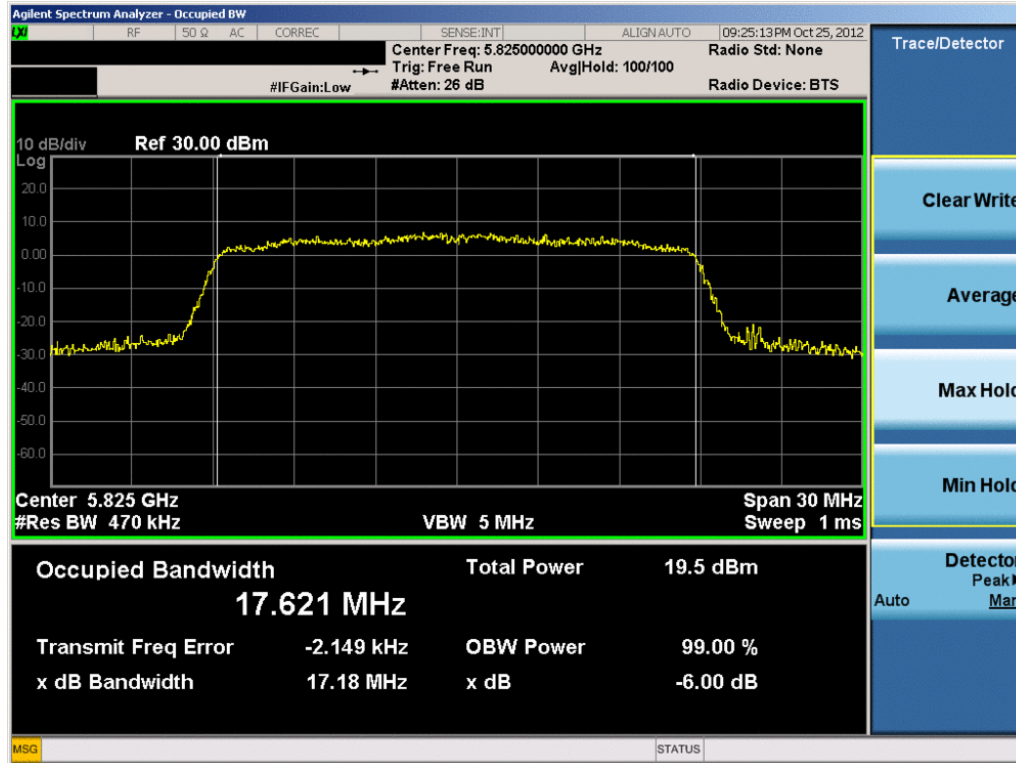


Plot 6-15. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

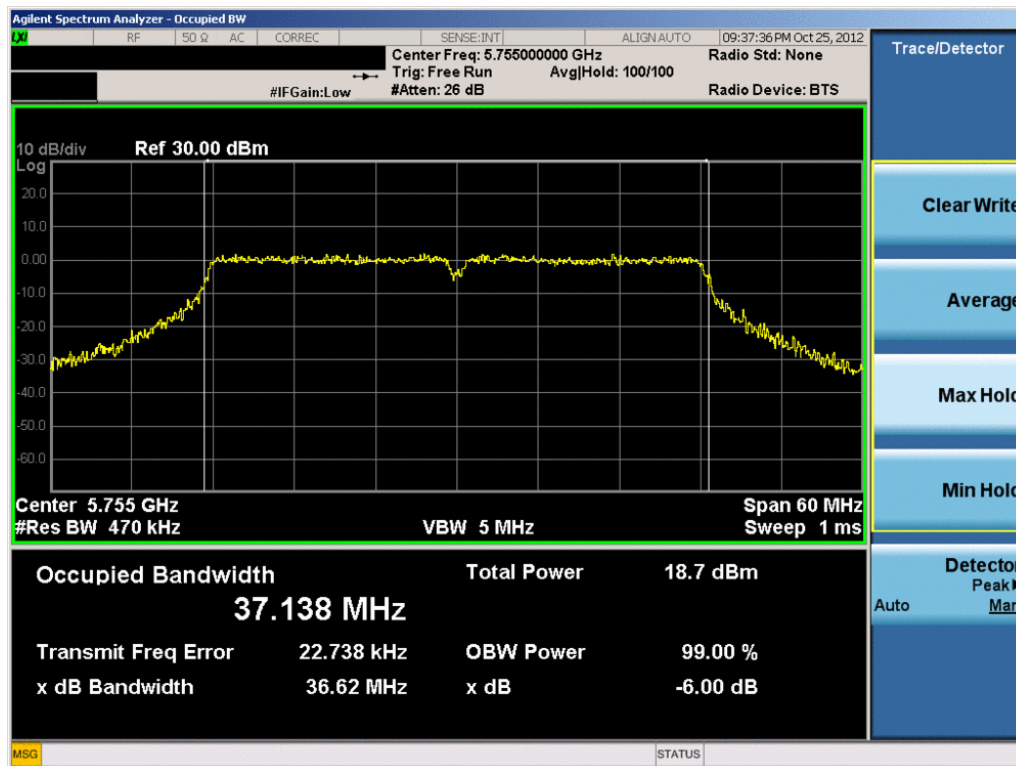

Plot 6-16. 6dB Bandwidth Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

|                                       |                                               |                                                                    |                |                                 |
|---------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSCHI925                    | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12            | EUT Type:<br>Portable Tablet                                       |                | Page 19 of 60                   |

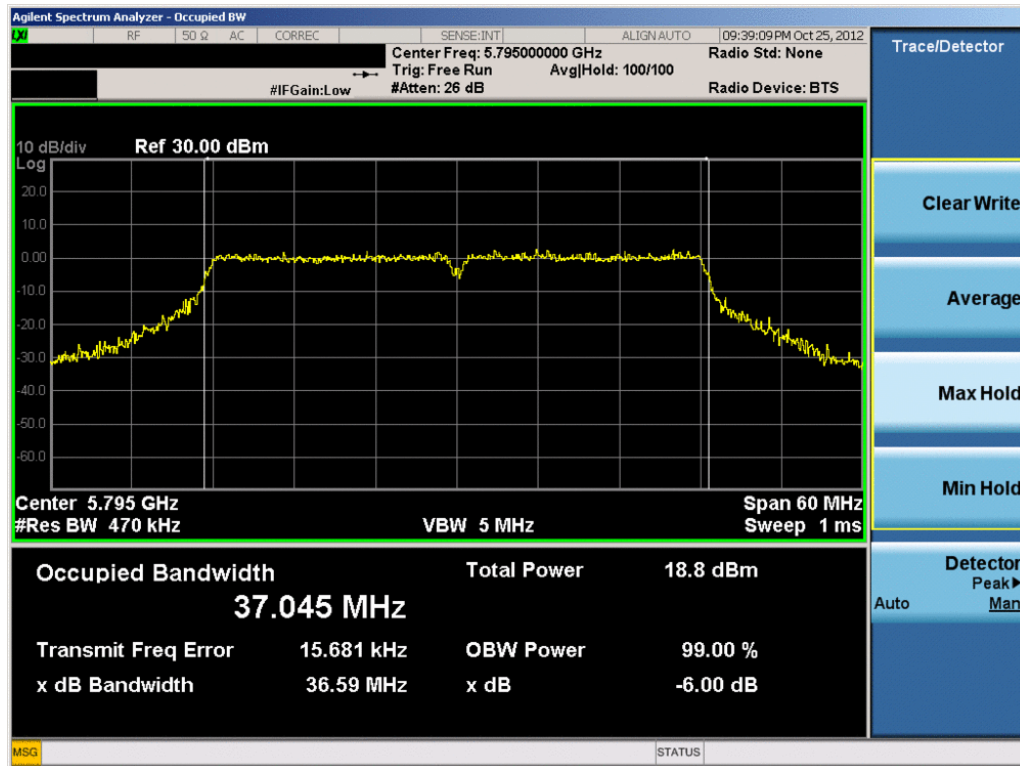

Plot 6-17. 6dB Bandwidth Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

|                                       |                                               |                                                                    |                |                                 |
|---------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSCHI925                    | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12            | EUT Type:<br>Portable Tablet                                       |                | Page 20 of 60                   |

### 6.3 Output Power Measurement – 802.11b/g/n (2.4GHz)

§15.247(b)(3); RSS-210 [A8.4]

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible conducted output power is 1 Watt.**

| Mode    | Freq<br>[MHz] | Channel | Detector | 802.11b Conducted Power [dBm] |       |       |       |
|---------|---------------|---------|----------|-------------------------------|-------|-------|-------|
|         |               |         |          | Data Rate [Mbps]              |       |       |       |
|         |               |         |          | 1                             | 2     | 5.5   | 11    |
| 802.11b | 2412          | 1       | AVG      | 13.67                         | 13.56 | 13.62 | 13.69 |
|         |               |         | PEAK     | 16.17                         | 16.10 | 16.15 | 16.20 |
| 802.11b | 2437          | 6       | AVG      | 14.11                         | 14.09 | 14.10 | 14.12 |
|         |               |         | PEAK     | 16.64                         | 16.65 | 16.67 | 16.69 |
| 802.11b | 2462          | 11      | AVG      | 13.94                         | 13.89 | 13.83 | 13.86 |
|         |               |         | PEAK     | 16.43                         | 16.46 | 16.41 | 16.40 |

Table 6-3. 802.11b Conducted Output Power Measurements

| Mode    | Freq<br>[MHz] | Channel | Detector | 802.11g Conducted Power [dBm] |       |       |       |       |       |       |       |
|---------|---------------|---------|----------|-------------------------------|-------|-------|-------|-------|-------|-------|-------|
|         |               |         |          | Data Rate [Mbps]              |       |       |       |       |       |       |       |
|         |               |         |          | 6                             | 9     | 12    | 18    | 24    | 36    | 48    | 54    |
| 802.11g | 2412          | 1       | AVG      | 13.32                         | 13.59 | 13.54 | 13.31 | 13.49 | 13.34 | 13.44 | 13.49 |
|         |               |         | PEAK     | 18.65                         | 20.49 | 21.22 | 17.67 | 19.60 | 19.12 | 19.48 | 20.35 |
| 802.11g | 2437          | 6       | AVG      | 13.66                         | 13.93 | 13.87 | 13.61 | 13.81 | 13.52 | 13.75 | 13.67 |
|         |               |         | PEAK     | 19.02                         | 20.79 | 21.48 | 18.08 | 19.86 | 19.29 | 19.72 | 20.41 |
| 802.11g | 2462          | 11      | AVG      | 13.37                         | 13.63 | 13.66 | 13.39 | 13.56 | 13.30 | 13.51 | 13.41 |
|         |               |         | PEAK     | 18.64                         | 20.30 | 21.29 | 18.06 | 19.64 | 19.25 | 19.49 | 20.16 |

Table 6-4. 802.11g Conducted Output Power Measurements

| Mode    | Freq<br>[MHz] | Channel | Detector | 802.11n (2.4GHz) Conducted Power [dBm] |         |           |         |         |         |         |         |
|---------|---------------|---------|----------|----------------------------------------|---------|-----------|---------|---------|---------|---------|---------|
|         |               |         |          | Data Rate [Mbps]                       |         |           |         |         |         |         |         |
|         |               |         |          | 6.5/7.2                                | 13/14.4 | 19.5/21.7 | 26/28.9 | 39/43.4 | 52/57.8 | 58.5/65 | 65/72.2 |
| 802.11n | 2412          | 1       | AVG      | 13.28                                  | 13.26   | 13.31     | 13.30   | 13.44   | 13.21   | 13.36   | 13.38   |
|         |               |         | PEAK     | 19.25                                  | 18.45   | 19.22     | 19.27   | 20.32   | 18.68   | 18.03   | 17.40   |
| 802.11n | 2437          | 6       | AVG      | 13.62                                  | 13.59   | 13.63     | 13.59   | 13.79   | 13.41   | 13.68   | 13.66   |
|         |               |         | PEAK     | 19.57                                  | 18.74   | 19.35     | 19.61   | 20.63   | 18.76   | 18.26   | 17.78   |
| 802.11n | 2462          | 11      | AVG      | 13.35                                  | 13.34   | 13.32     | 13.42   | 13.58   | 13.34   | 13.46   | 13.51   |
|         |               |         | PEAK     | 19.29                                  | 18.72   | 19.23     | 19.43   | 20.44   | 18.53   | 18.09   | 17.80   |

Table 6-5. 20MHz BW 802.11n (2.4GHz) Conducted Output Power Measurements

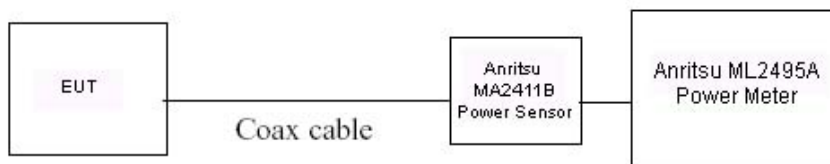


Figure 6-2. Test Instrument & Measurement Setup

|                                       |                                                                                     |                                                                    |                                                                                       |                                 |
|---------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSCHI925                    |  | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12                                                  | EUT Type:<br>Portable Tablet                                       |                                                                                       | Page 21 of 60                   |

## 6.4 Output Power Measurement – 802.11a/n (5GHz)

§15.247(b)(3); RSS-210 [A8.4]

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average power measurements while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible conducted output power is 1 Watt.**

| Mode    | Freq<br>[MHz] | Channel | Detector | 802.11a Conducted Power [dBm] |       |       |       |       |       |       |       |
|---------|---------------|---------|----------|-------------------------------|-------|-------|-------|-------|-------|-------|-------|
|         |               |         |          | Data Rate [Mbps]              |       |       |       |       |       |       |       |
|         |               |         |          | 6                             | 9     | 12    | 18    | 24    | 36    | 48    | 54    |
| 802.11a | 5745          | 149     | AVG      | 13.67                         | 13.70 | 13.72 | 13.72 | 13.84 | 13.84 | 13.92 | 13.82 |
|         |               |         | PEAK     | 18.56                         | 18.63 | 18.60 | 18.66 | 18.77 | 18.81 | 18.96 | 18.98 |
| 802.11a | 5765          | 153     | AVG      | 13.66                         | 13.76 | 13.79 | 13.78 | 13.83 | 13.85 | 13.83 | 13.79 |
|         |               |         | PEAK     | 18.56                         | 18.66 | 18.67 | 18.73 | 18.84 | 18.93 | 18.94 | 18.93 |
| 802.11a | 5785          | 157     | AVG      | 13.66                         | 13.68 | 13.66 | 13.68 | 13.73 | 13.78 | 13.86 | 13.84 |
|         |               |         | PEAK     | 18.59                         | 18.71 | 18.71 | 18.75 | 18.80 | 18.92 | 18.98 | 18.95 |
| 802.11a | 5805          | 161     | AVG      | 13.69                         | 13.65 | 13.67 | 13.75 | 13.78 | 13.85 | 13.87 | 13.86 |
|         |               |         | PEAK     | 18.56                         | 18.59 | 18.61 | 18.72 | 18.78 | 18.91 | 18.97 | 18.96 |
| 802.11a | 5825          | 165     | AVG      | 13.61                         | 13.67 | 13.72 | 13.73 | 13.78 | 13.82 | 13.84 | 13.86 |
|         |               |         | PEAK     | 18.52                         | 18.6  | 18.58 | 18.74 | 18.76 | 18.86 | 18.90 | 18.94 |

Table 6-6. 802.11a Conducted Output Power Measurements

| Mode    | Freq<br>[MHz] | Channel | Detector | 20MHz BW 802.11n (5GHz) Conducted Power [dBm] |         |           |         |         |         |         |         |
|---------|---------------|---------|----------|-----------------------------------------------|---------|-----------|---------|---------|---------|---------|---------|
|         |               |         |          | Data Rate [Mbps]                              |         |           |         |         |         |         |         |
|         |               |         |          | 6.5/7.2                                       | 13/14.4 | 19.5/21.7 | 26/28.9 | 39/43.4 | 52/57.8 | 58.5/65 | 65/72.2 |
| 802.11n | 5745          | 149     | AVG      | 13.51                                         | 13.50   | 13.49     | 13.53   | 13.52   | 13.61   | 13.59   | 13.66   |
|         |               |         | PEAK     | 19.06                                         | 19.20   | 19.22     | 19.17   | 19.31   | 19.36   | 19.37   | 19.35   |
| 802.11n | 5765          | 153     | AVG      | 13.52                                         | 13.54   | 13.47     | 13.53   | 13.57   | 13.56   | 13.54   | 13.51   |
|         |               |         | PEAK     | 19.09                                         | 19.22   | 19.21     | 19.07   | 19.28   | 19.25   | 19.24   | 19.19   |
| 802.11n | 5785          | 157     | AVG      | 13.49                                         | 13.55   | 13.51     | 13.50   | 13.53   | 13.58   | 13.60   | 13.61   |
|         |               |         | PEAK     | 19.05                                         | 19.27   | 19.21     | 19.22   | 19.35   | 19.23   | 19.26   | 19.27   |
| 802.11n | 5805          | 161     | AVG      | 13.52                                         | 13.57   | 13.53     | 13.51   | 13.56   | 13.60   | 13.58   | 13.65   |
|         |               |         | PEAK     | 19.07                                         | 19.21   | 19.24     | 19.22   | 19.37   | 19.27   | 19.25   | 19.34   |
| 802.11n | 5825          | 165     | AVG      | 13.55                                         | 13.56   | 13.63     | 13.63   | 13.58   | 13.59   | 13.60   | 13.64   |
|         |               |         | PEAK     | 19.1                                          | 19.12   | 19.17     | 19.21   | 19.20   | 19.25   | 19.25   | 19.30   |

Table 6-7. 20MHz BW 802.11n (5GHz) Conducted Output Power Measurements

| Mode    | Freq<br>[MHz] | Channel | Detector | 40MHz BW 802.11n (5GHz) Conducted Power [dBm] |       |         |       |       |         |           |         |
|---------|---------------|---------|----------|-----------------------------------------------|-------|---------|-------|-------|---------|-----------|---------|
|         |               |         |          | Data Rate [Mbps]                              |       |         |       |       |         |           |         |
|         |               |         |          | 13.5/15                                       | 27/30 | 40.5/45 | 54/60 | 81/90 | 108/120 | 121.5/135 | 135/150 |
| 802.11n | 5755          | 151     | AVG      | 10.96                                         | 10.90 | 10.94   | 10.93 | 10.96 | 10.97   | 11.04     | 10.98   |
|         |               |         | PEAK     | 19.09                                         | 18.92 | 18.72   | 19.12 | 18.93 | 18.86   | 19.10     | 18.97   |
| 802.11n | 5795          | 159     | AVG      | 11.01                                         | 11.04 | 11.05   | 10.93 | 10.90 | 10.99   | 10.98     | 10.92   |
|         |               |         | PEAK     | 19.11                                         | 18.95 | 19.01   | 19.13 | 19.11 | 19.15   | 19.11     | 18.96   |

Table 6-8. 40MHz BW 802.11n (5GHz) Conducted Output Power Measurements




Figure 6-3. Test Instrument & Measurement Setup

|                                       |                                                                                     |                                                                    |                                                                                       |                                 |
|---------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSCHI925                    |  | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12                                                  | EUT Type:<br>Portable Tablet                                       |                                                                                       | Page 22 of 60                   |

## 6.5 Power Spectral Density (802.11a/b/g/n)

### §15.247(e); RSS-210 [A8.2]


The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. **The maximum permissible power spectral density is 8 dBm in any 3 kHz band.**

Per the guidance on power spectral density measurements given in KDB 558074, the spectrum is measured with a 100kHz bandwidth using a peak detector with a max hold trace. The measured spectrum is compared to the 8dBm/3kHz limit given in 15.247(e) by applying a bandwidth correction factor equal to  $10\log(3\text{kHz}/100\text{kHz}) = -15.23\text{dB}$ .

Per the guidance of KDB 558074, section 5.4.1.1, the reference level for out of band emissions is established from the plots of this section since the emissions are measured with a RBW of 100kHz. This reference level is then used to determine the limit in subsequent plots for out of band spurious emissions.


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Power Spectral Density [dBm] | Bandwidth Correction Factor [dB] | Corrected Power Spectral Density [dBm] | Maximum Permissible Power Density [dBm / 3kHz] | Margin [dB] |
|-----------------|-------------|-------------|------------------|---------------------------------------|----------------------------------|----------------------------------------|------------------------------------------------|-------------|
| 2412            | 1           | b           | 1                | 9.395                                 | -15.23                           | -5.834                                 | 8.0                                            | -13.83      |
| 2437            | 6           | b           | 1                | 9.022                                 | -15.23                           | -6.207                                 | 8.0                                            | -14.21      |
| 2462            | 11          | b           | 1                | 9.187                                 | -15.23                           | -6.042                                 | 8.0                                            | -14.04      |
| 2412            | 1           | g           | 6                | 4.070                                 | -15.23                           | -11.159                                | 8.0                                            | -19.16      |
| 2437            | 6           | g           | 6                | 4.955                                 | -15.23                           | -10.274                                | 8.0                                            | -18.27      |
| 2462            | 11          | g           | 6                | 4.374                                 | -15.23                           | -10.855                                | 8.0                                            | -18.85      |
| 2412            | 1           | n           | 6.5/7.2 (MCS0)   | 3.240                                 | -15.23                           | -11.989                                | 8.0                                            | -19.99      |
| 2437            | 6           | n           | 6.5/7.2 (MCS0)   | 3.616                                 | -15.23                           | -11.613                                | 8.0                                            | -19.61      |
| 2462            | 11          | n           | 6.5/7.2 (MCS0)   | 3.436                                 | -15.23                           | -11.793                                | 8.0                                            | -19.79      |
| 5745            | 149         | a           | 6                | 3.558                                 | -15.23                           | -11.671                                | 8.0                                            | -19.67      |
| 5785            | 157         | a           | 6                | 2.924                                 | -15.23                           | -12.305                                | 8.0                                            | -20.30      |
| 5825            | 165         | a           | 6                | 3.650                                 | -15.23                           | -11.579                                | 8.0                                            | -19.58      |
| 5745            | 149         | n (20MHz)   | 6.5/7.2 (MCS0)   | 2.518                                 | -15.23                           | -12.711                                | 8.0                                            | -20.71      |
| 5785            | 157         | n (20MHz)   | 6.5/7.2 (MCS0)   | 2.574                                 | -15.23                           | -12.655                                | 8.0                                            | -20.65      |
| 5825            | 165         | n (20MHz)   | 6.5/7.2 (MCS0)   | 2.851                                 | -15.23                           | -12.378                                | 8.0                                            | -20.38      |
| 5755            | 151         | n (40MHz)   | 13.5/15 (MCS0)   | -2.578                                | -15.23                           | -17.807                                | 8.0                                            | -25.81      |
| 5795            | 159         | n (40MHz)   | 13.5/15 (MCS0)   | -2.780                                | -15.23                           | -18.009                                | 8.0                                            | -26.01      |

**Table 6-9. Conducted Power Density Measurements**




**Figure 6-4. Test Instrument & Measurement Setup**

|                                       |                                                                                     |                                                                    |                                                                                       |                                 |
|---------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSCHI925                    |  | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12                                                  | EUT Type:<br>Portable Tablet                                       | Page 23 of 60                                                                         |                                 |

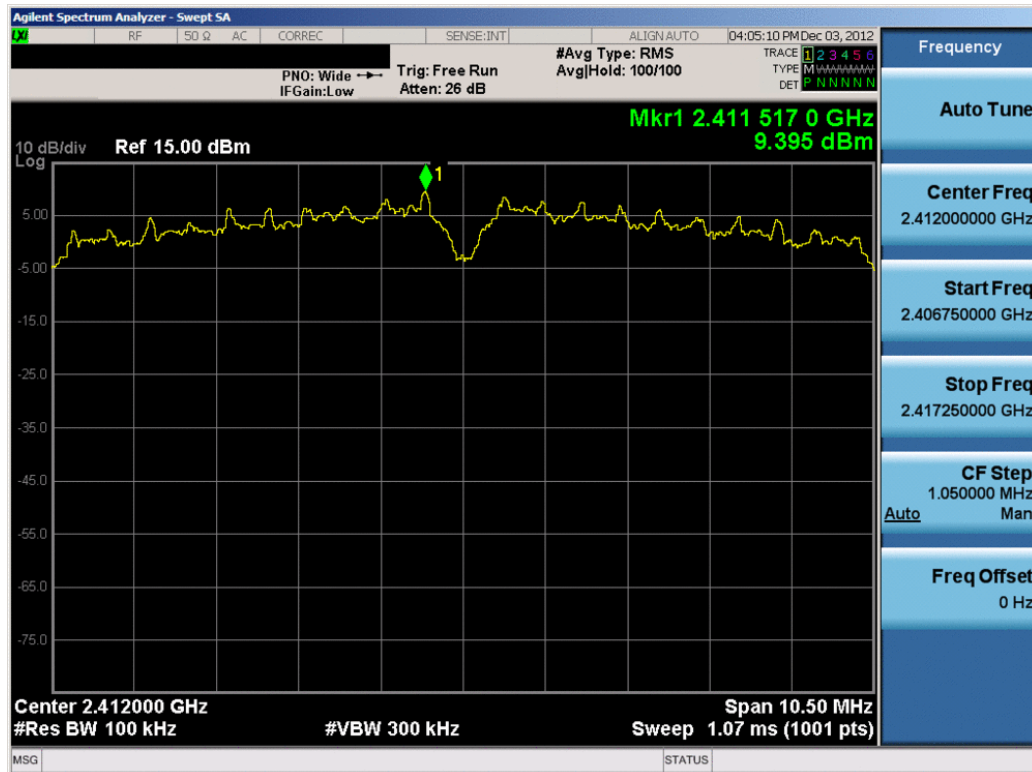


Plot 6-18. Power Spectral Density Plot (802.11b – Ch. 1)

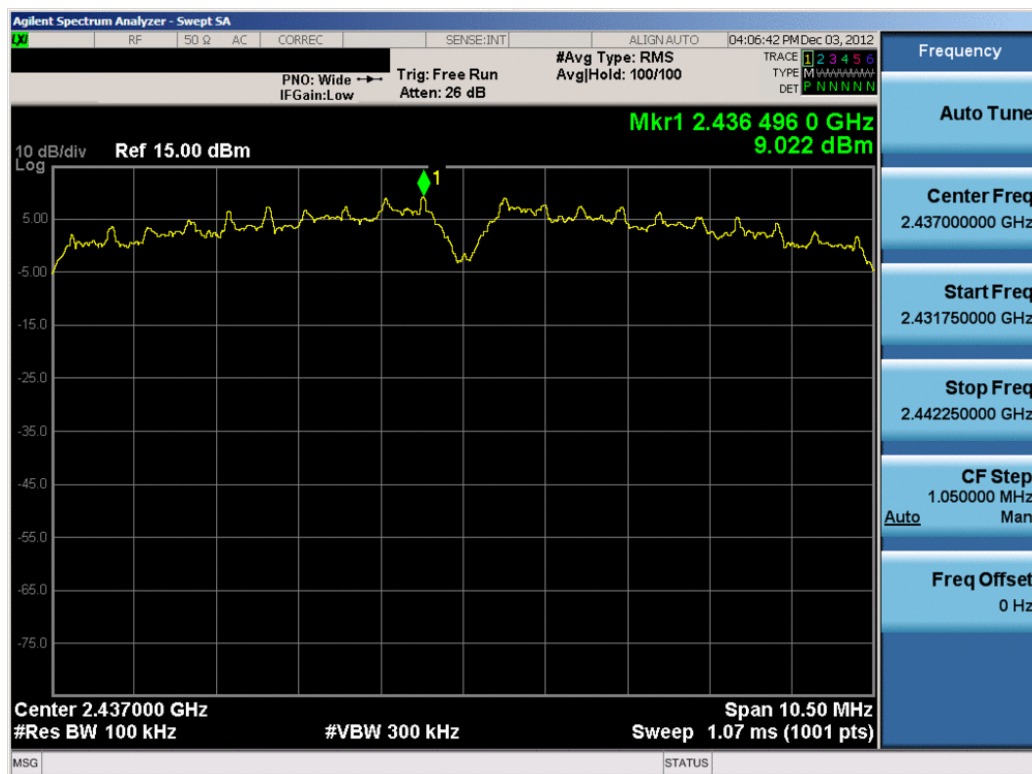


Plot 6-19. Power Spectral Density Plot (802.11b – Ch. 6)

|                                       |                                               |                                                                    |                |                                 |
|---------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSCHI925                    | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12            | EUT Type:<br>Portable Tablet                                       |                | Page 24 of 60                   |

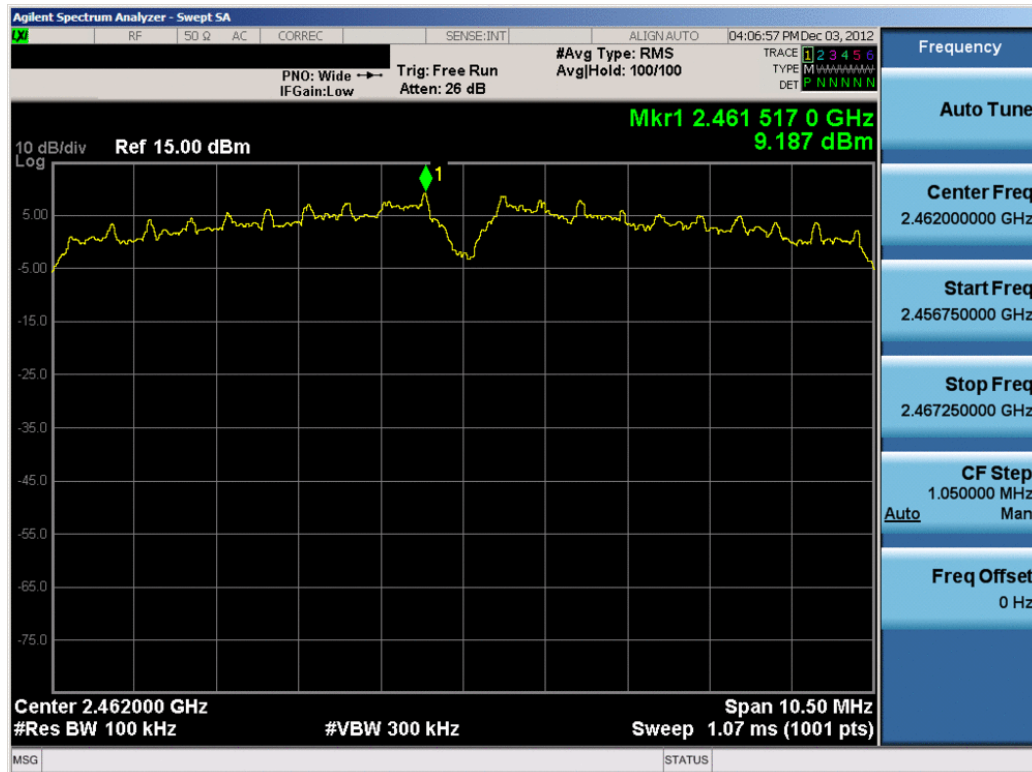


### Plot 6-20. Power Spectral Density Plot (802.11b – Ch. 11)

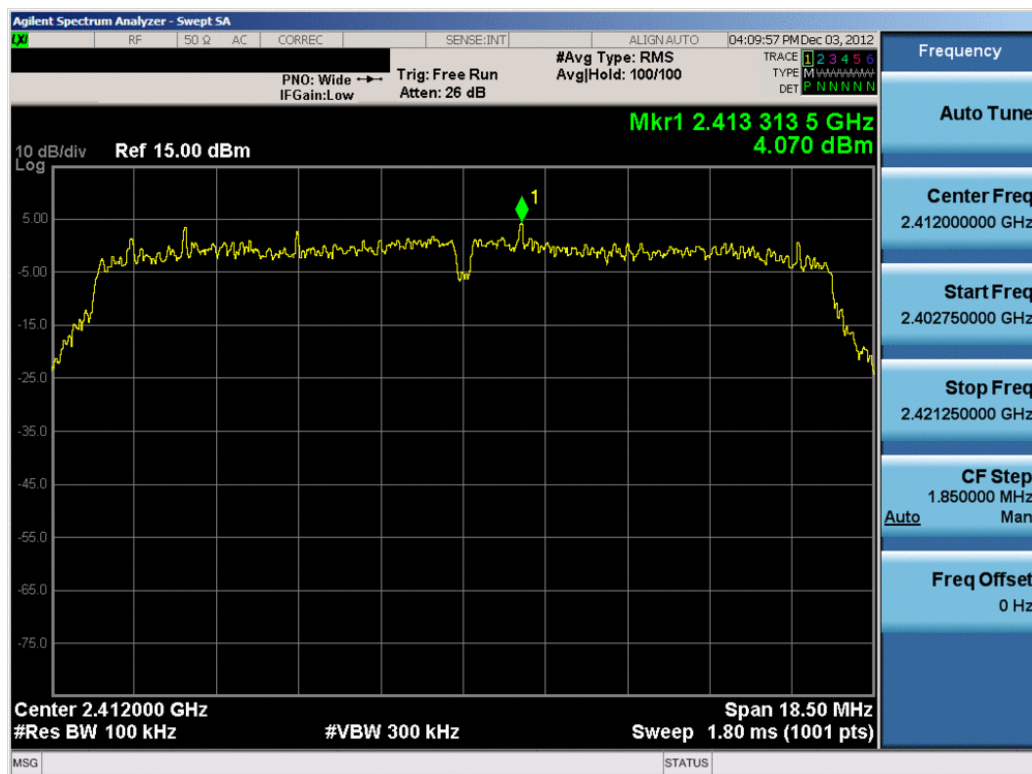


### Plot 6-21. Power Spectral Density Plot (802.11g – Ch. 1)

|                                       |                                                                                                                                                                                                                                                      |                              |                                 |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------|
| FCC ID: A3LSCHI925                    |  <b>FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br/>(CERTIFICATION)</b>  |                              | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12                                                                                                                                                                                                                   | EUT Type:<br>Portable Tablet | Page 25 of 60                   |

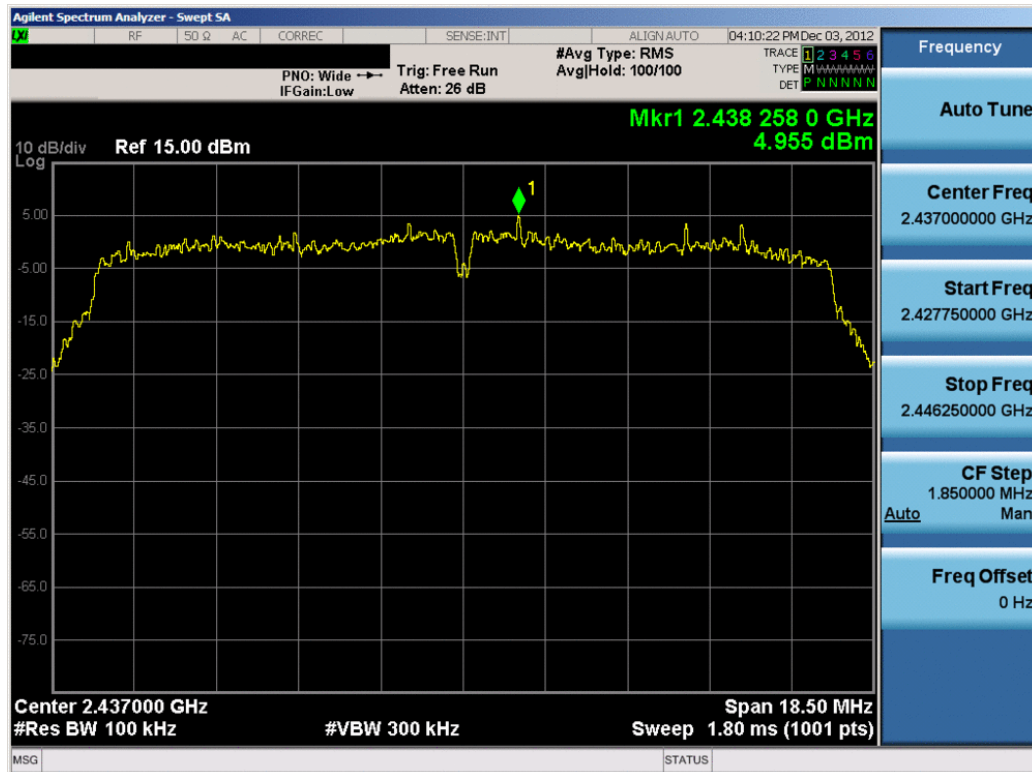


Plot 6-22. Power Spectral Density Plot (802.11g – Ch. 6)

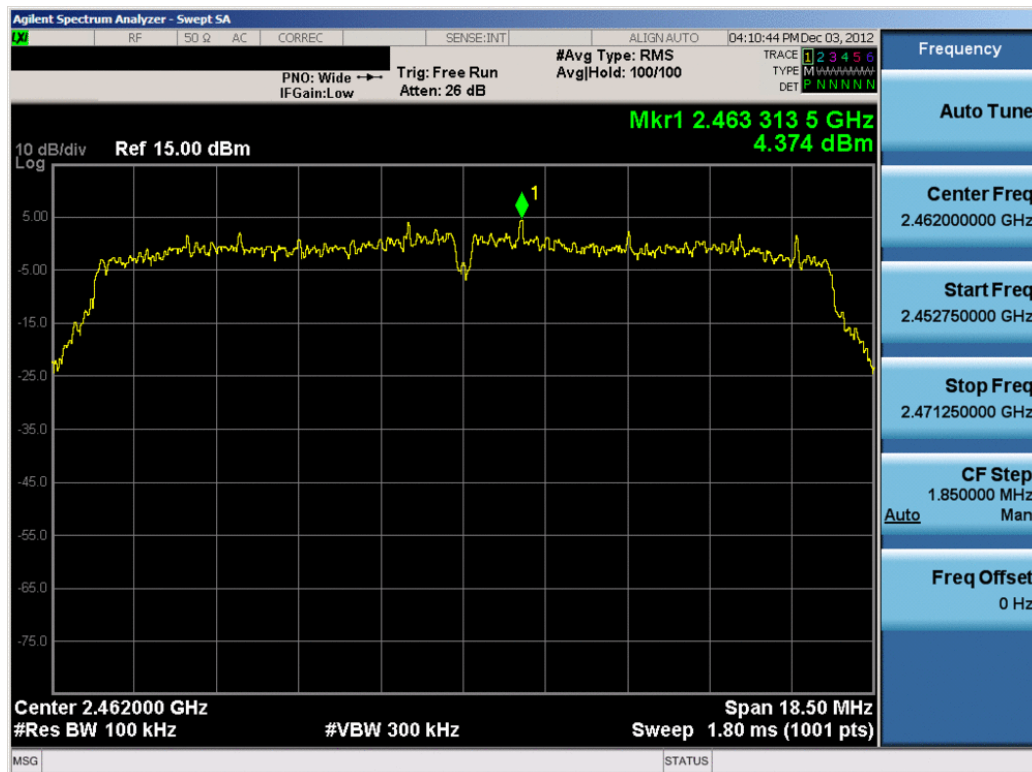


Plot 6-23. Power Spectral Density Plot (802.11g – Ch. 11)

|                                       |                                               |                                                                    |                |                                 |
|---------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSCHI925                    | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12            | EUT Type:<br>Portable Tablet                                       |                | Page 26 of 60                   |

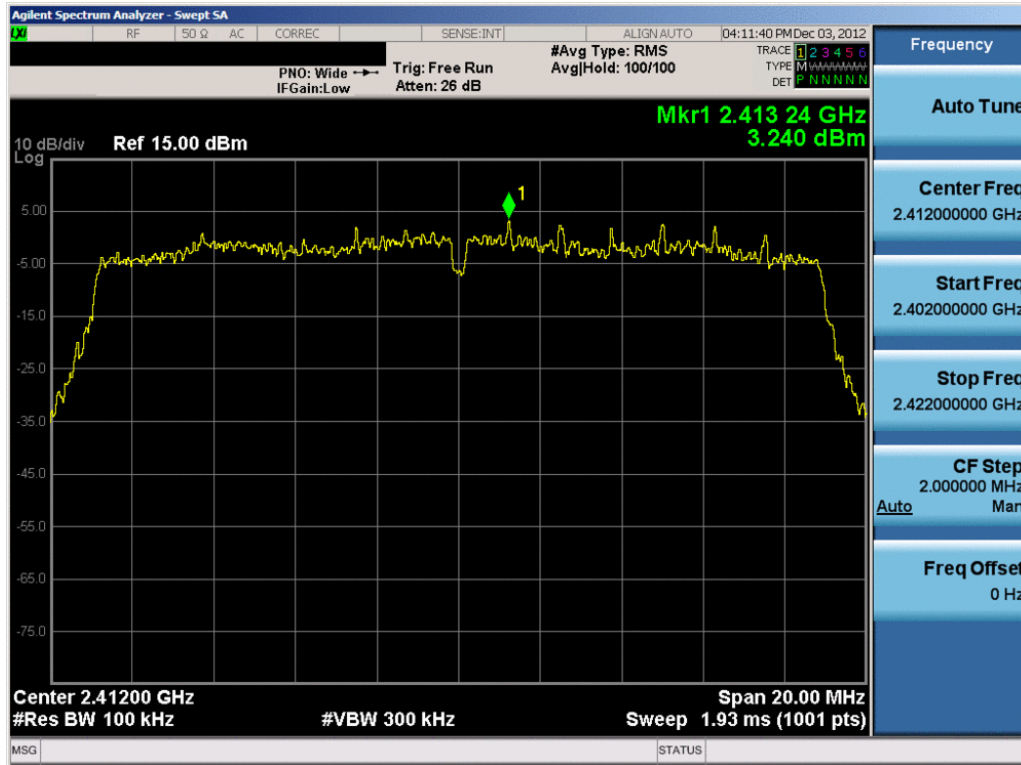


Plot 6-24. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 1)

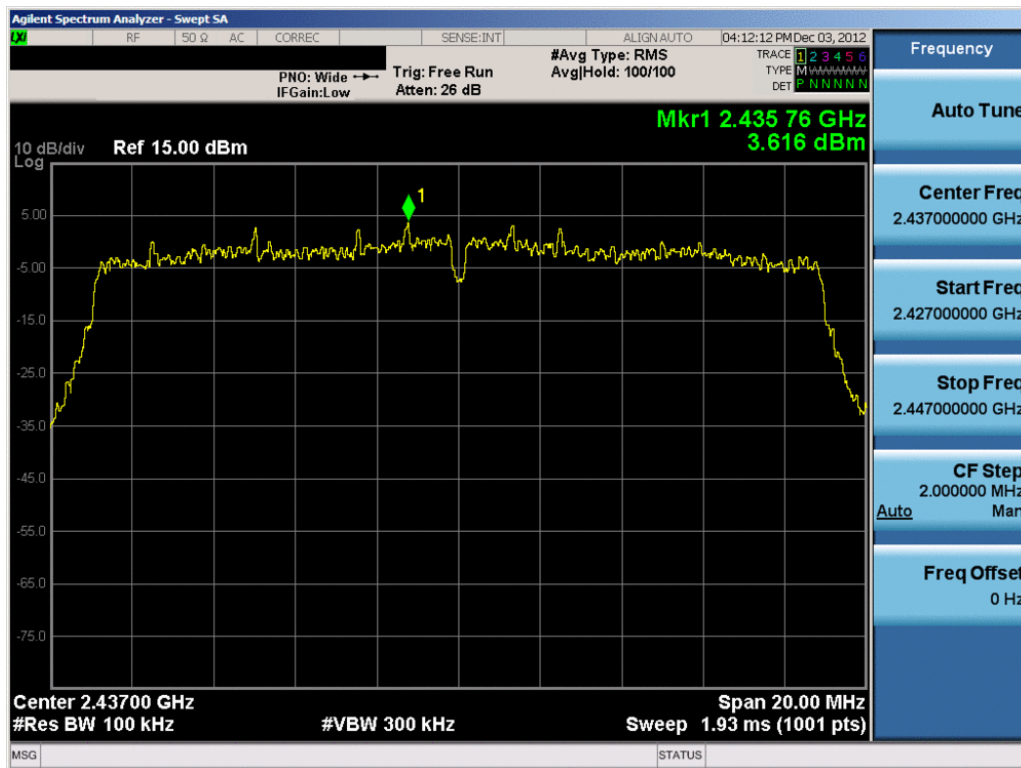


Plot 6-25. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 6)

|                                       |                                               |                                                                    |                |                                 |
|---------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSCHI925                    | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12            | EUT Type:<br>Portable Tablet                                       |                | Page 27 of 60                   |

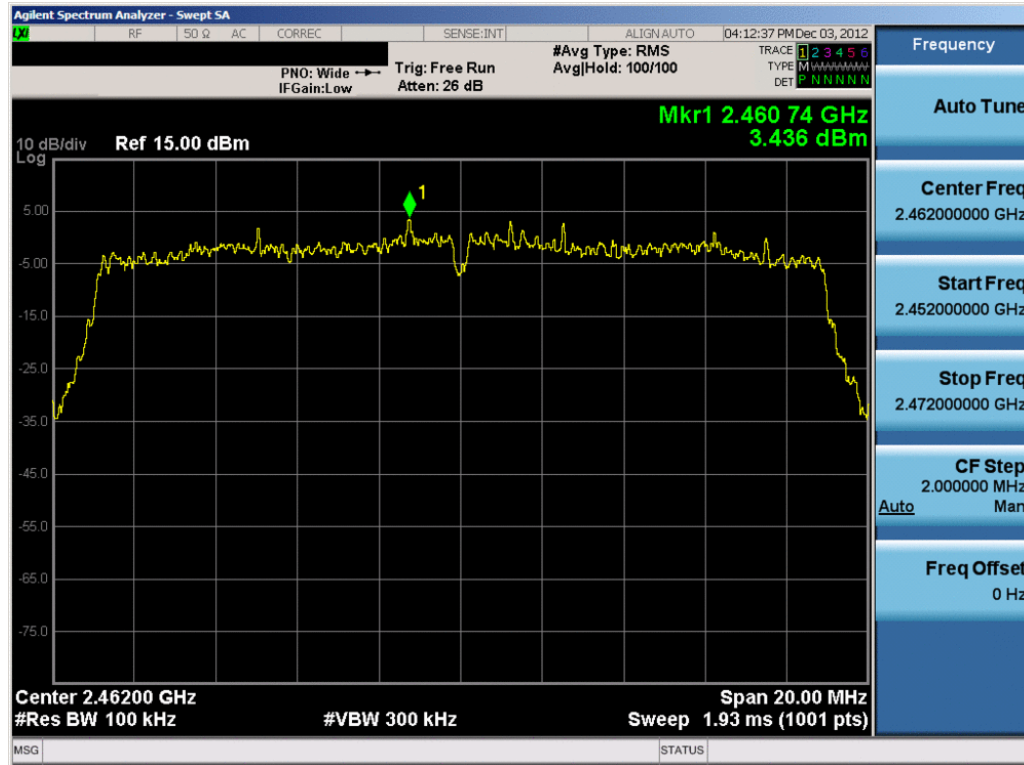


Plot 6-26. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 11)

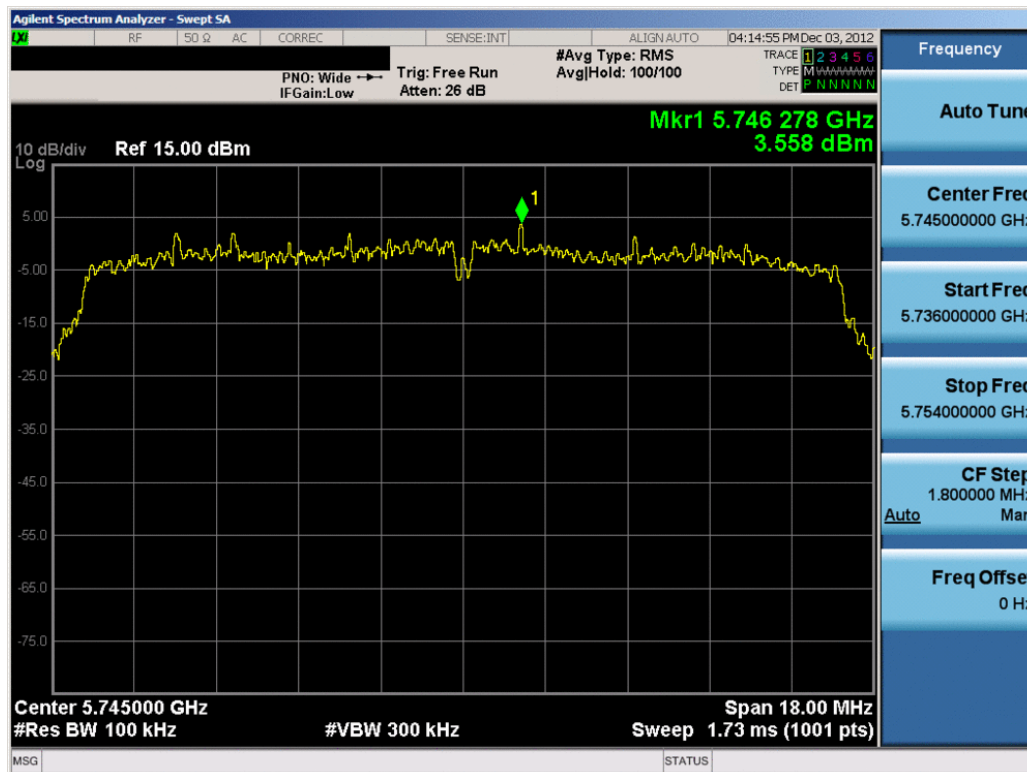


Plot 6-27. Power Spectral Density Plot (802.11a – Ch. 149)

|                                       |                                               |                                                                    |                |                                 |
|---------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSCHI925                    | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12            | EUT Type:<br>Portable Tablet                                       |                | Page 28 of 60                   |

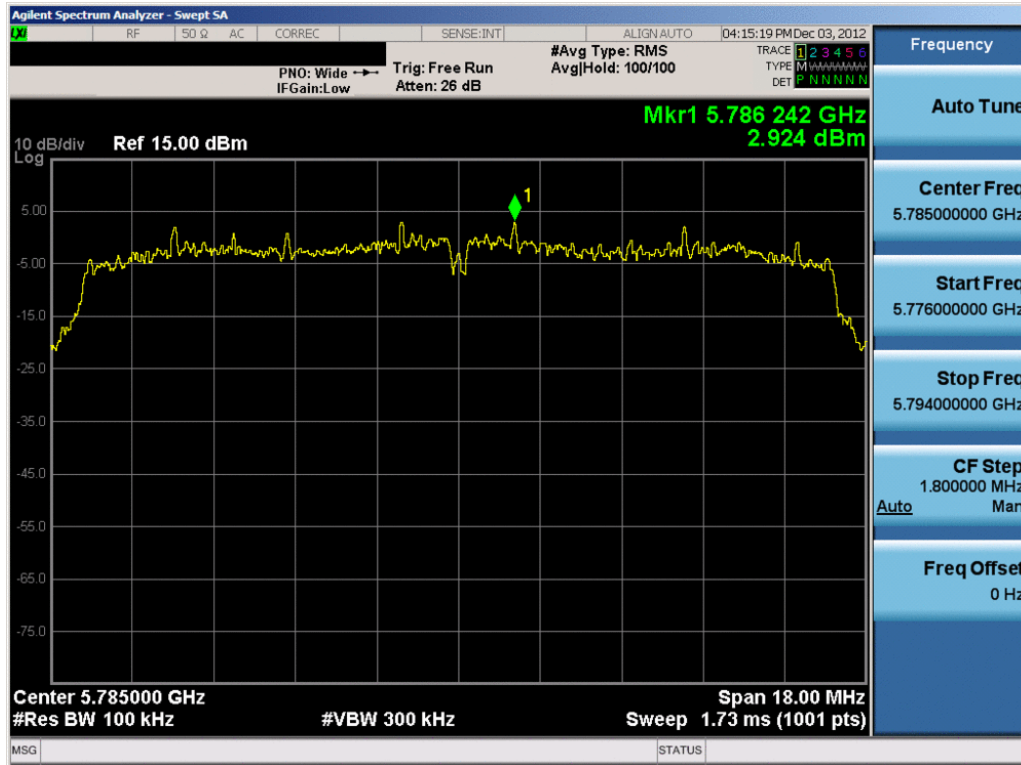


Plot 6-28. Power Spectral Density Plot (802.11a – Ch. 157)

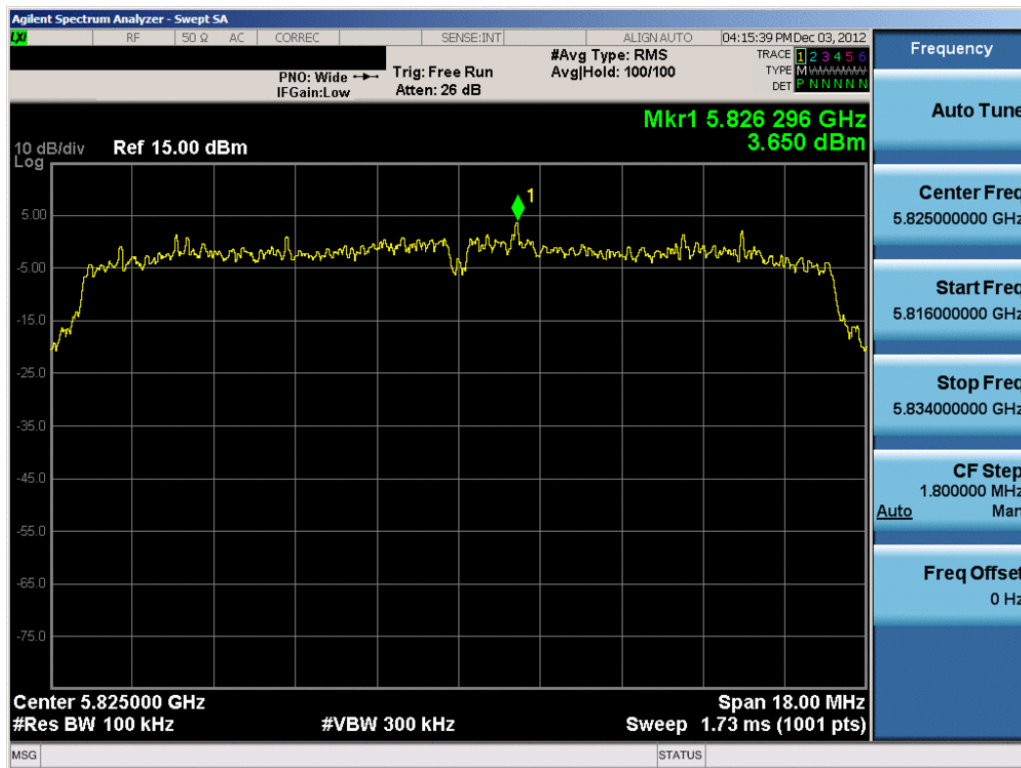


Plot 6-29. Power Spectral Density Plot (802.11a – Ch. 165)

|                                       |                                               |                                                                    |                |                                 |
|---------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSCHI925                    | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12            | EUT Type:<br>Portable Tablet                                       |                | Page 29 of 60                   |

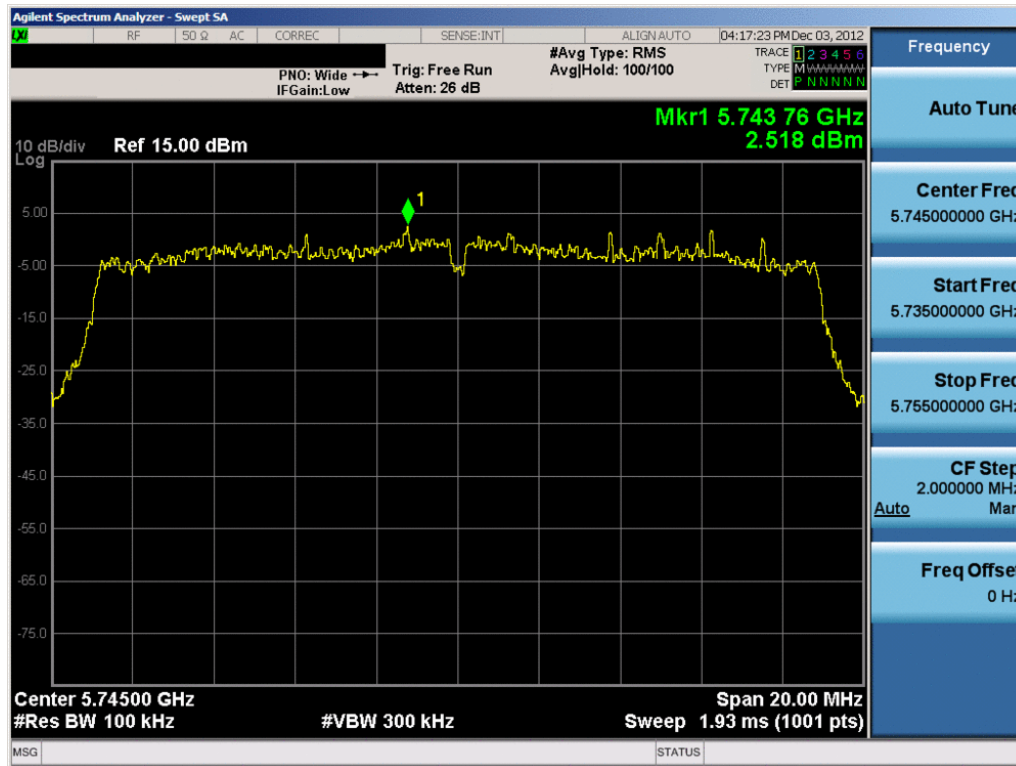


Plot 6-30. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

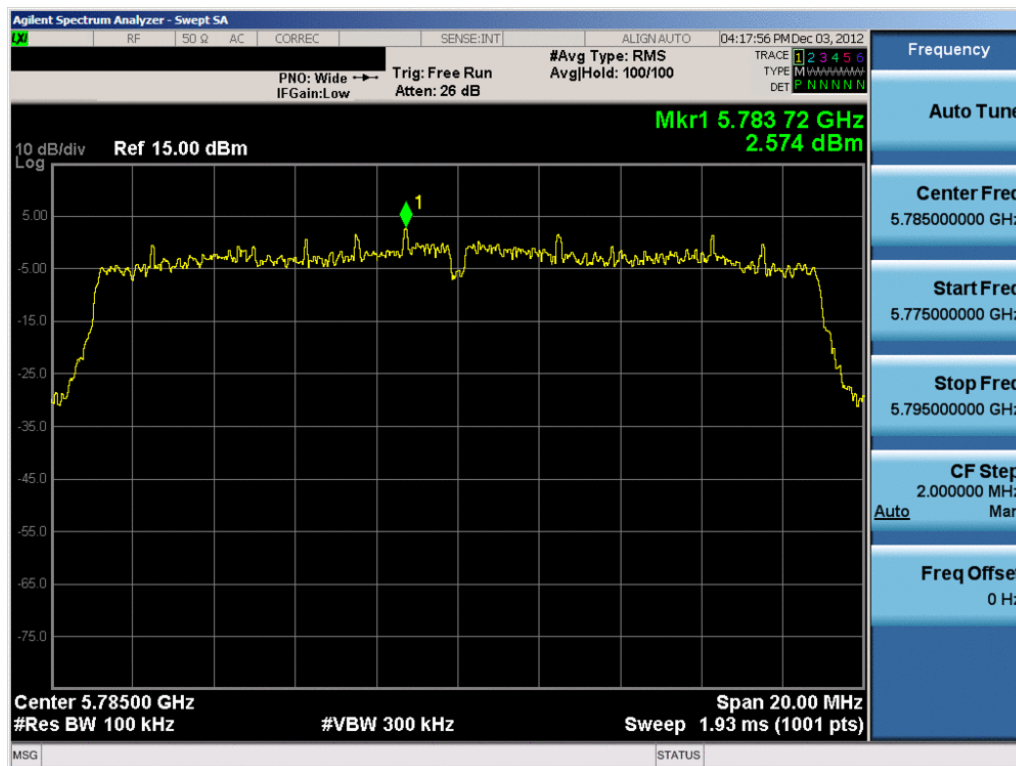


Plot 6-31. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 157)

|                                       |                                               |                                                                    |                |                                 |
|---------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSCHI925                    | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12            | EUT Type:<br>Portable Tablet                                       |                | Page 30 of 60                   |

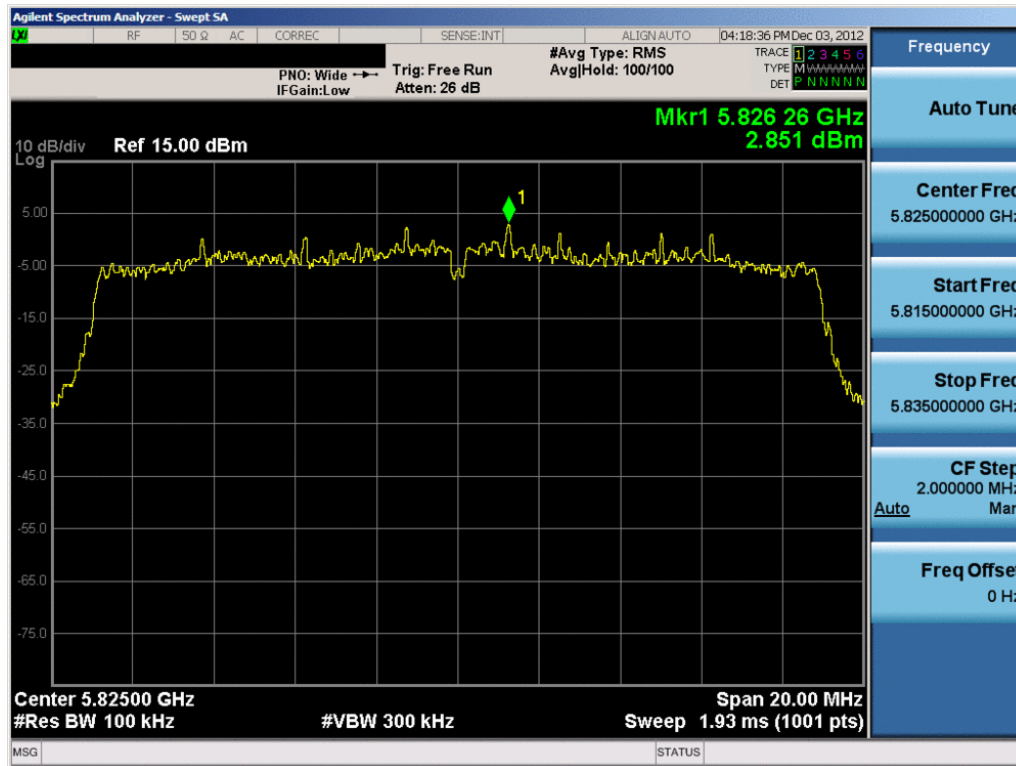


Plot 6-32. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

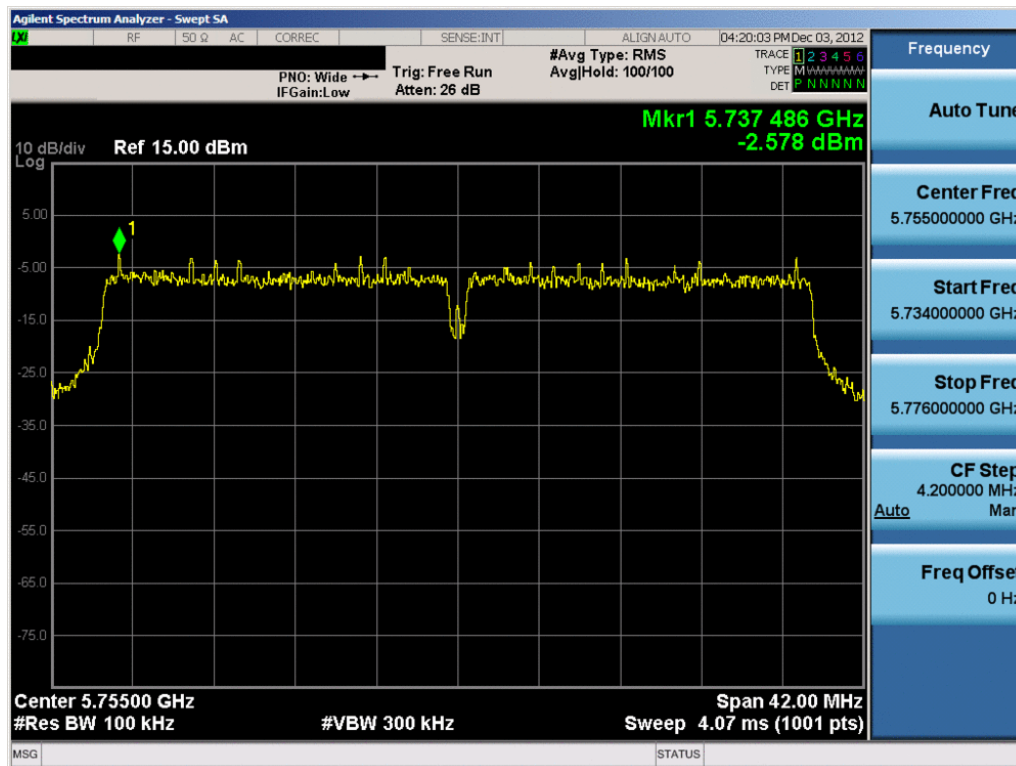

Plot 6-33. Power Spectral Density Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

|                                       |                                               |                                                                    |                |                                 |
|---------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSCHI925                    | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12            | EUT Type:<br>Portable Tablet                                       |                | Page 31 of 60                   |

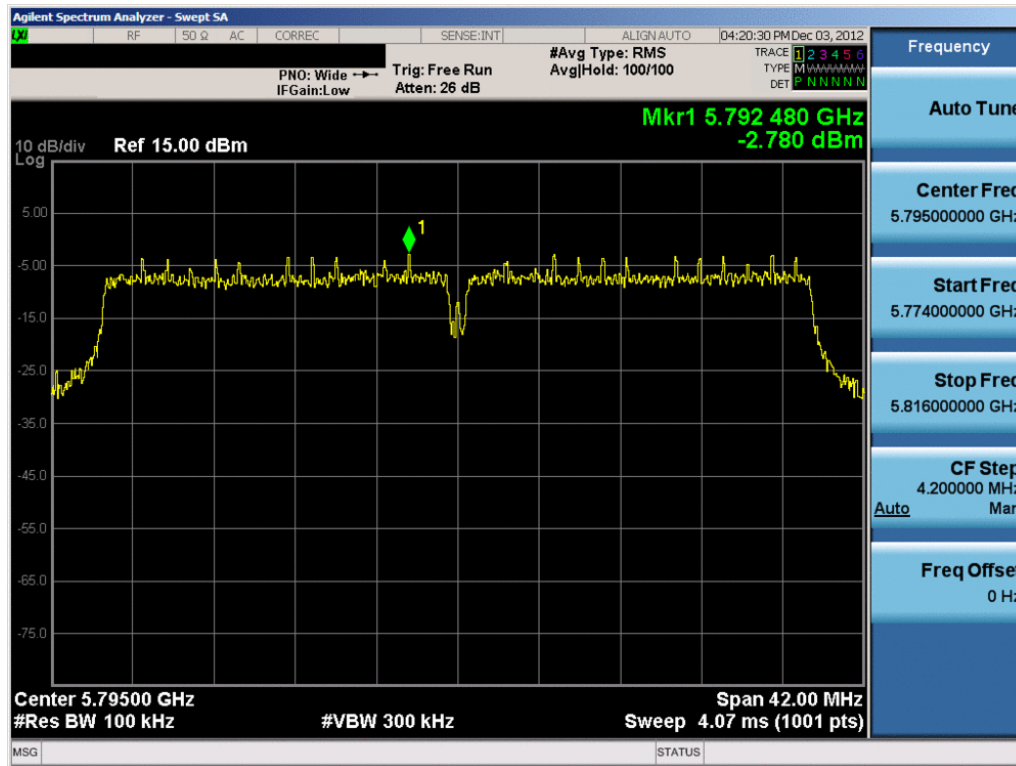

Plot 6-34. Power Spectral Density Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

|                                       |                                               |                                                                    |                |                                 |
|---------------------------------------|-----------------------------------------------|--------------------------------------------------------------------|----------------|---------------------------------|
| FCC ID: A3LSCHI925                    | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 15.247 802.11a/b/g/n MEASUREMENT REPORT<br>(CERTIFICATION) | <b>SAMSUNG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y12102221539.A3L | Test Dates:<br>10/23/12 - 12/03/12            | EUT Type:<br>Portable Tablet                                       |                | Page 32 of 60                   |