















Appendix H: Emissions in Restricted Bands

Test Result

Mode:	B-2412
-------	--------

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	2310.0000	37.72	40.84	3.12	74.00	33.16	150	187	PK	Horizontal	PASS
2	2374.9600	41.51	45.46	3.95	74.00	28.54	150	49	PK	Horizontal	PASS
3	2382.8000	42.38	46.61	4.23	74.00	27.39	150	49	PK	Horizontal	PASS
4	2386.4800	45.61	49.70	4.09	74.00	24.30	150	223	PK	Horizontal	PASS
5	2388.6400	44.74	48.95	4.21	74.00	25.05	150	230	PK	Horizontal	PASS
6	2390.0000	39.10	43.48	4.38	74.00	30.52	150	39	PK	Horizontal	PASS

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	2310.0000	37.14	40.26	3.12	74.00	33.74	150	157	PK	Vertical	PASS
2	2378.9600	40.52	44.62	4.10	74.00	29.38	150	52	PK	Vertical	PASS
3	2383.3600	41.61	45.81	4.20	74.00	28.19	150	42	PK	Vertical	PASS
4	2387.4400	41.95	46.01	4.06	74.00	27.99	150	194	PK	Vertical	PASS
5	2388.0000	41.86	45.98	4.12	74.00	28.02	150	22	PK	Vertical	PASS
6	2390.0000	38.81	43.19	4.38	74.00	30.81	150	71	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: B-2462

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	2483.5000	43.60	47.06	3.46	74.00	26.94	150	4	PK	Horizontal	PASS
2	2484.1765	49.26	52.73	3.47	74.00	21.27	150	224	PK	Horizontal	PASS
3	2484.9355	49.73	53.26	3.53	74.00	20.74	150	35	PK	Horizontal	PASS
4	2485.1170	49.69	53.22	3.53	74.00	20.78	150	51	PK	Horizontal	PASS
5	2486.2885	49.28	52.77	3.49	74.00	21.23	150	51	PK	Horizontal	PASS
6	2500.0000	39.60	43.10	3.50	74.00	30.90	150	56	PK	Horizontal	PASS

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	2483.5000	39.62	43.08	3.46	74.00	30.92	150	103	PK	Vertical	PASS
2	2483.5660	47.98	51.44	3.46	74.00	22.56	150	37	PK	Vertical	PASS
3	2485.3480	48.10	51.62	3.52	74.00	22.38	150	45	PK	Vertical	PASS
4	2486.6020	47.61	51.12	3.51	74.00	22.88	150	40	PK	Vertical	PASS
5	2487.8230	47.86	51.33	3.47	74.00	22.67	150	45	PK	Vertical	PASS
6	2500.0000	37.56	41.06	3.50	74.00	32.94	150	24	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX20-2412

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	2310.0000	38.59	41.71	3.12	74.00	32.29	150	176	PK	Horizontal	PASS
2	2378.0000	43.83	47.88	4.05	74.00	26.12	150	179	PK	Horizontal	PASS
3	2380.8000	44.93	49.12	4.19	74.00	24.88	150	166	PK	Horizontal	PASS
4	2386.4800	46.70	50.79	4.09	74.00	23.21	150	164	PK	Horizontal	PASS
5	2388.8000	46.30	50.53	4.23	74.00	23.47	150	174	PK	Horizontal	PASS
6	2390.0000	43.95	48.33	4.38	74.00	25.67	150	179	PK	Horizontal	PASS

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	2310.0000	37.93	41.05	3.12	74.00	32.95	150	148	PK	Vertical	PASS
2	2324.0000	39.05	42.36	3.31	74.00	31.64	150	148	PK	Vertical	PASS
3	2334.8800	39.46	42.73	3.27	74.00	31.27	150	161	PK	Vertical	PASS
4	2351.2000	39.55	43.08	3.53	74.00	30.92	150	337	PK	Vertical	PASS
5	2360.0000	39.51	43.03	3.52	74.00	30.97	150	235	PK	Vertical	PASS
6	2390.0000	38.18	42.56	4.38	74.00	31.44	150	19	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX20-2462

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	2483.5000	48.15	51.61	3.46	74.00	22.39	150	165	PK	Horizontal	PASS
2	2483.6155	48.06	51.52	3.46	74.00	22.48	150	170	PK	Horizontal	PASS
3	2484.1765	47.58	51.05	3.47	74.00	22.95	150	191	PK	Horizontal	PASS
4	2485.3315	47.33	50.85	3.52	74.00	23.15	150	180	PK	Horizontal	PASS
5	2486.7670	46.62	50.14	3.52	74.00	23.86	150	170	PK	Horizontal	PASS
6	2500.0000	41.23	44.73	3.50	74.00	29.27	150	162	PK	Horizontal	PASS

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	2483.5000	38.83	42.29	3.46	74.00	31.71	150	38	PK	Vertical	PASS
2	2489.3740	41.24	44.80	3.56	74.00	29.20	150	72	PK	Vertical	PASS
3	2491.6015	39.66	43.22	3.56	74.00	30.78	150	179	PK	Vertical	PASS
4	2492.0140	40.23	43.79	3.56	74.00	30.21	150	152	PK	Vertical	PASS
5	2494.8685	39.05	42.61	3.56	74.00	31.39	150	360	PK	Vertical	PASS
6	2500.0000	37.78	41.28	3.50	74.00	32.72	150	205	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX40-2422

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310.0000	3.12	38.5	41.62	74.00	32.38	36.25	39.37	54.00	14.63	150	271	Horizontal	PASS
2	2377.2800	4.02	43.22	47.24	74.00	26.76	40.91	44.93	54.00	9.07	150	164	Horizontal	PASS
3	2387.2000	4.07	48.41	52.48	74.00	21.52	43.25	47.32	54.00	6.68	150	164	Horizontal	PASS
4	2388.2400	4.15	50.18	54.33	74.00	19.67	43.78	47.93	54.00	6.07	150	166	Horizontal	PASS
5	2389.4400	4.31	50.69	55.00	74.00	19.00	44.16	48.47	54.00	5.53	150	164	Horizontal	PASS
6	2390.0000	4.38	50.84	55.22	74.00	18.78	45.07	49.45	54.00	4.55	150	166	Horizontal	PASS

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310.0000	3.12	37.97	41.09	74.00	32.91	36.22	39.34	54.00	14.66	150	84	Vertical	PASS
2	2330.4800	3.29	38.84	42.13	74.00	31.87	37.04	40.33	54.00	13.67	150	129	Vertical	PASS
3	2351.9200	3.50	39.11	42.61	74.00	31.39	36.71	40.21	54.00	13.79	150	205	Vertical	PASS
4	2363.9200	3.64	40.59	44.23	74.00	29.77	37.70	41.34	54.00	12.66	150	94	Vertical	PASS
5	2380.0800	4.16	39.73	43.89	74.00	30.11	36.86	41.02	54.00	12.98	150	40	Vertical	PASS
6	2390.0000	4.38	42.64	47.02	74.00	26.98	40.57	44.95	54.00	9.05	150	40	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX40-2452

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5000	3.46	51.24	54.70	74.00	19.30	45.92	49.38	54.00	4.62	150	184	Horizontal	PASS
2	2483.5495	3.46	54.41	57.87	74.00	16.13	44.32	47.78	54.00	6.22	150	176	Horizontal	PASS
3	2484.1105	3.47	53.27	56.74	74.00	17.26	43.83	47.30	54.00	6.70	150	163	Horizontal	PASS
4	2484.4735	3.50	54.32	57.82	74.00	16.18	43.25	46.75	54.00	7.25	150	171	Horizontal	PASS
5	2485.1005	3.53	51.95	55.48	74.00	18.52	42.31	45.84	54.00	8.16	150	166	Horizontal	PASS
6	2500.0000	3.50	39.91	43.41	74.00	30.59	37.65	41.15	54.00	12.85	150	182	Horizontal	PASS

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5000	3.46	40.84	44.30	74.00	29.70	37.67	41.13	54.00	12.87	150	151	Vertical	PASS
2	2484.2590	3.48	41.66	45.14	74.00	28.86	38.98	42.46	54.00	11.54	150	34	Vertical	PASS
3	2485.4140	3.51	40.44	43.95	74.00	30.05	38.46	41.97	54.00	12.03	150	165	Vertical	PASS
4	2488.6975	3.53	39.4	42.93	74.00	31.07	37.36	40.89	54.00	13.11	150	170	Vertical	PASS
5	2492.5585	3.57	40.06	43.63	74.00	30.37	37.15	40.72	54.00	13.28	150	224	Vertical	PASS
6	2500.0000	3.50	38.25	41.75	74.00	32.25	36.14	39.64	54.00	14.36	150	34	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Appendix I: Spurious emissions

Test Result


Note:

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels. The test data of the worst-case (B-2412MHz) condition was recorded in this report. The measurement results above 18GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz are reported.

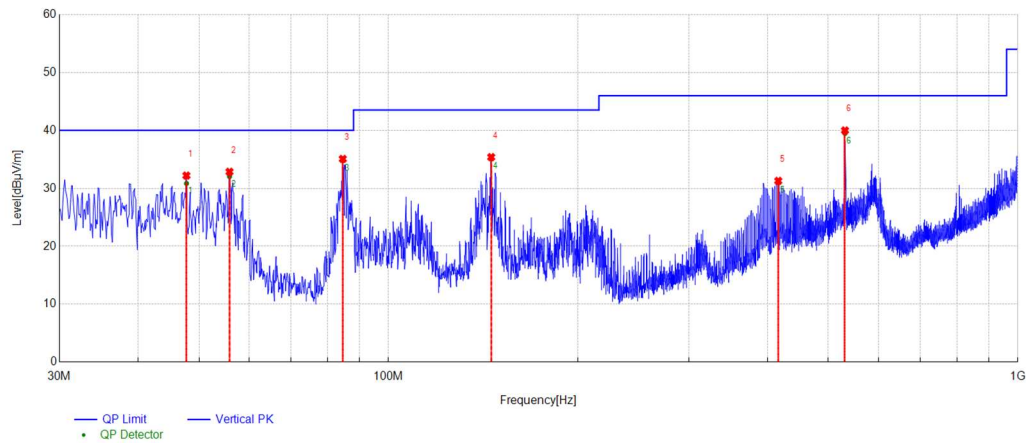

QP Final Data List									
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	47.7528	-16.05	30.84	40.00	9.16	100	273	Vertical	PASS
2	55.9016	-16.53	32.04	40.00	7.96	100	129	Vertical	PASS
3	84.6165	-20.17	34.80	40.00	5.20	100	74	Vertical	PASS
4	145.6356	-16.18	35.11	43.50	8.39	100	255	Vertical	PASS
5	416.2926	-12.93	31.01	46.00	14.99	200	266	Vertical	PASS
6	531.3461	-10.73	39.47	46.00	6.53	100	98	Vertical	PASS

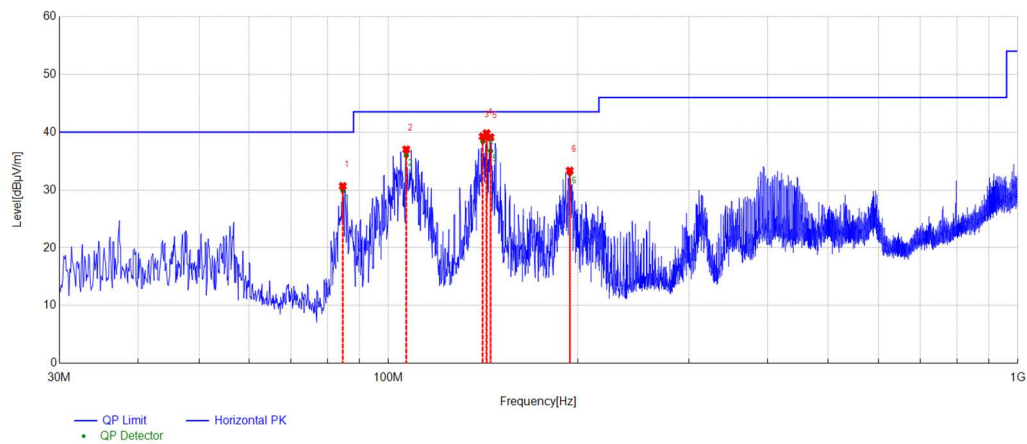

QP Final Data List									
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	84.6165	-20.17	29.87	40.00	10.13	200	282	Horizontal	PASS
2	106.7347	-18.96	35.96	43.50	7.54	200	199	Horizontal	PASS
3	141.2165	-16.46	38.39	43.50	5.11	216.5	156.4	Horizontal	PASS
4	143.2798	-16.36	39.48	43.50	4.02	221.8	176.1	Horizontal	PASS
5	145.2822	-16.17	36.75	43.50	6.75	200.8	152.5	Horizontal	PASS
6	194.1404	-18.83	32.83	43.50	10.67	200	162	Horizontal	PASS

Mode: B-2412

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1201.4000	42.34	42.07	-0.27	74.00	31.93	150	155	PK	Horizontal	PASS
2	1953.4000	44.33	45.91	1.58	74.00	28.09	150	114	PK	Horizontal	PASS
3	4824.0000	64.08	49.17	-14.91	74.00	24.83	150	2	PK	Horizontal	PASS
4	6349.5000	52.94	42.79	-10.15	74.00	31.21	150	92	PK	Horizontal	PASS
5	8442.0000	51.82	44.86	-6.96	74.00	29.14	150	152	PK	Horizontal	PASS
6	11038.0000	49.27	46.57	-2.70	74.00	27.43	150	310	PK	Horizontal	PASS

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1315.8000	39.41	39.15	-0.26	74.00	34.85	150	245	PK	Vertical	PASS
2	1858.4000	39.67	40.89	1.22	74.00	33.11	150	18	PK	Vertical	PASS
3	4823.5000	65.42	50.49	-14.93	74.00	23.51	150	348	PK	Vertical	PASS
4	6221.0000	52.90	42.34	-10.56	74.00	31.66	150	22	PK	Vertical	PASS
5	7893.5000	53.11	44.87	-8.24	74.00	29.13	150	37	PK	Vertical	PASS
6	10858.5000	50.60	47.16	-3.44	74.00	26.84	150	317	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: B-2437

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1411.2000	40.03	39.73	-0.30	74.00	34.27	150	349	PK	Horizontal	PASS
2	1853.6000	39.57	40.83	1.26	74.00	33.17	150	57	PK	Horizontal	PASS
3	4873.5000	66.68	52.47	-14.21	74.00	21.53	150	9	PK	Horizontal	PASS
4	6866.5000	52.47	42.82	-9.65	74.00	31.18	150	168	PK	Horizontal	PASS
5	9385.0000	50.52	45.28	-5.24	74.00	28.72	150	190	PK	Horizontal	PASS
6	11878.5000	48.69	47.26	-1.43	74.00	26.74	150	281	PK	Horizontal	PASS

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1483.0000	38.87	38.88	0.01	74.00	35.12	150	21	PK	Vertical	PASS
2	1685.0000	39.25	39.76	0.51	74.00	34.24	150	105	PK	Vertical	PASS
3	4874.0000	67.95	53.75	-14.20	74.00	20.25	150	340	PK	Vertical	PASS
4	6573.5000	54.85	44.76	-10.09	74.00	29.24	150	150	PK	Vertical	PASS
5	7990.5000	51.81	44.46	-7.35	74.00	29.54	150	219	PK	Vertical	PASS
6	9276.0000	51.17	45.74	-5.43	74.00	28.26	150	16	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: B-2462

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1484.0000	39.98	39.98	0.00	74.00	34.02	150	22	PK	Horizontal	PASS
2	1704.8000	39.59	40.22	0.63	74.00	33.78	150	183	PK	Horizontal	PASS
3	4923.5000	67.13	53.47	-13.66	74.00	20.53	150	7	PK	Horizontal	PASS
4	6862.5000	52.85	43.33	-9.52	74.00	30.67	150	214	PK	Horizontal	PASS
5	9636.5000	50.72	45.94	-4.78	74.00	28.06	150	243	PK	Horizontal	PASS
6	10812.0000	50.06	46.62	-3.44	74.00	27.38	150	325	PK	Horizontal	PASS

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1456.8000	39.93	39.86	-0.07	74.00	34.14	150	311	PK	Vertical	PASS
2	3951.5000	59.26	41.92	-17.34	74.00	32.08	150	65	PK	Vertical	PASS
3	4923.5000	67.83	54.17	-13.66	74.00	19.83	150	356	PK	Vertical	PASS
4	6450.0000	52.74	42.26	-10.48	74.00	31.74	150	72	PK	Vertical	PASS
5	8373.0000	51.97	44.75	-7.22	74.00	29.25	150	180	PK	Vertical	PASS
6	9929.5000	50.76	46.48	-4.28	74.00	27.52	150	356	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX20-2412

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1225.0000	41.18	40.68	-0.50	74.00	33.32	150	257	PK	Horizontal	PASS
2	1808.8000	43.87	44.87	1.00	74.00	29.13	150	197	PK	Horizontal	PASS
3	4829.5000	56.01	41.31	-14.70	74.00	32.69	150	27	PK	Horizontal	PASS
4	7104.5000	53.64	43.81	-9.83	74.00	30.19	150	311	PK	Horizontal	PASS
5	9490.5000	52.12	46.94	-5.18	74.00	27.06	150	318	PK	Horizontal	PASS
6	10410.5000	51.99	48.00	-3.99	74.00	26.00	150	325	PK	Horizontal	PASS

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1201.6000	39.64	39.37	-0.27	74.00	34.63	150	110	PK	Vertical	PASS
2	1808.8000	40.78	41.78	1.00	74.00	32.22	150	110	PK	Vertical	PASS
3	3945.0000	61.61	44.04	-17.57	74.00	29.96	150	4	PK	Vertical	PASS
4	5260.5000	59.33	46.10	-13.23	74.00	27.90	150	104	PK	Vertical	PASS
5	6570.5000	55.21	45.09	-10.12	74.00	28.91	150	142	PK	Vertical	PASS
6	9249.0000	51.71	46.98	-4.73	74.00	27.02	150	4	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX20-2437

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1240.4000	40.84	40.40	-0.44	74.00	33.60	150	158	PK	Horizontal	PASS
2	1827.6000	44.43	45.64	1.21	74.00	28.36	150	201	PK	Horizontal	PASS
3	3647.5000	57.96	38.74	-19.22	74.00	35.26	150	28	PK	Horizontal	PASS
4	4983.0000	56.49	42.67	-13.82	74.00	31.33	150	231	PK	Horizontal	PASS
5	7538.5000	53.69	44.48	-9.21	74.00	29.52	150	239	PK	Horizontal	PASS
6	9847.0000	51.53	47.19	-4.34	74.00	26.81	150	359	PK	Horizontal	PASS

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1201.6000	39.83	39.56	-0.27	74.00	34.44	150	89	PK	Vertical	PASS
2	1827.6000	40.64	41.85	1.21	74.00	32.15	150	294	PK	Vertical	PASS
3	3945.5000	63.04	45.50	-17.54	74.00	28.50	150	360	PK	Vertical	PASS
4	4882.0000	56.53	42.53	-14.00	74.00	31.47	150	4	PK	Vertical	PASS
5	7142.5000	53.86	44.11	-9.75	74.00	29.89	150	127	PK	Vertical	PASS
6	9173.5000	52.18	46.45	-5.73	74.00	27.55	150	250	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX20-2462

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1233.8000	41.90	41.43	-0.47	74.00	32.57	150	257	PK	Horizontal	PASS
2	1846.4000	45.33	46.64	1.31	74.00	27.36	150	197	PK	Horizontal	PASS
3	3686.5000	59.15	39.94	-19.21	74.00	34.06	150	19	PK	Horizontal	PASS
4	6036.5000	53.65	42.00	-11.65	74.00	32.00	150	64	PK	Horizontal	PASS
5	8011.0000	52.62	45.06	-7.56	74.00	28.94	150	233	PK	Horizontal	PASS
6	10220.0000	52.29	48.24	-4.05	74.00	25.76	150	165	PK	Horizontal	PASS

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1461.8000	40.02	39.94	-0.08	74.00	34.06	150	15	PK	Vertical	PASS
2	1846.4000	41.98	43.29	1.31	74.00	30.71	150	68	PK	Vertical	PASS
3	3945.0000	62.45	44.88	-17.57	74.00	29.12	150	264	PK	Vertical	PASS
4	5266.5000	58.54	45.04	-13.50	74.00	28.96	150	112	PK	Vertical	PASS
5	6569.0000	56.40	46.24	-10.16	74.00	27.76	150	316	PK	Vertical	PASS
6	8141.5000	53.32	45.70	-7.62	74.00	28.30	150	4	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX40-2422

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1461.6000	39.11	39.03	-0.08	74.00	34.97	150	334	PK	Horizontal	PASS
2	1816.4000	44.37	45.49	1.12	74.00	28.51	150	203	PK	Horizontal	PASS
3	4509.5000	55.47	39.71	-15.76	74.00	34.29	150	36	PK	Horizontal	PASS
4	6203.0000	54.07	43.08	-10.99	74.00	30.92	150	297	PK	Horizontal	PASS
5	9227.0000	51.58	46.65	-4.93	74.00	27.35	150	357	PK	Horizontal	PASS
6	11393.5000	50.36	47.32	-3.04	74.00	26.68	150	160	PK	Horizontal	PASS

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1315.6000	40.81	40.55	-0.26	74.00	33.45	150	338	PK	Vertical	PASS
2	1816.4000	40.89	42.01	1.12	74.00	31.99	150	77	PK	Vertical	PASS
3	3952.0000	60.14	42.77	-17.37	74.00	31.23	150	351	PK	Vertical	PASS
4	5273.0000	62.26	48.69	-13.57	74.00	25.31	150	303	PK	Vertical	PASS
5	7687.5000	53.10	44.60	-8.50	74.00	29.40	150	289	PK	Vertical	PASS
6	10150.0000	50.61	46.38	-4.23	74.00	27.62	150	98	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX40-2437

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1228.6000	41.44	40.95	-0.49	74.00	33.05	150	144	PK	Horizontal	PASS
2	1827.6000	44.75	45.96	1.21	74.00	28.04	150	216	PK	Horizontal	PASS
3	3674.0000	60.65	41.75	-18.90	74.00	32.25	150	163	PK	Horizontal	PASS
4	5136.5000	55.40	41.64	-13.76	74.00	32.36	150	12	PK	Horizontal	PASS
5	8013.5000	52.93	45.43	-7.50	74.00	28.57	150	307	PK	Horizontal	PASS
6	9122.5000	52.65	46.75	-5.90	74.00	27.25	150	232	PK	Horizontal	PASS

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1199.8000	39.99	39.71	-0.28	74.00	34.29	150	100	PK	Vertical	PASS
2	1827.8000	41.24	42.45	1.21	74.00	31.55	150	104	PK	Vertical	PASS
3	5256.5000	59.70	46.36	-13.34	74.00	27.64	150	121	PK	Vertical	PASS
4	7097.5000	57.40	47.79	-9.61	74.00	26.21	150	279	PK	Vertical	PASS
5	9841.5000	50.82	46.52	-4.30	74.00	27.48	150	287	PK	Vertical	PASS
6	11690.5000	49.96	47.73	-2.23	74.00	26.27	150	219	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX40-2452

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1501.0000	39.62	39.55	-0.07	74.00	34.45	150	56	PK	Horizontal	PASS
2	1838.8000	44.58	45.90	1.32	74.00	28.10	150	203	PK	Horizontal	PASS
3	3660.5000	60.32	40.95	-19.37	74.00	33.05	150	12	PK	Horizontal	PASS
4	4899.5000	56.01	42.47	-13.54	74.00	31.53	150	19	PK	Horizontal	PASS
5	6559.0000	54.32	43.89	-10.43	74.00	30.11	150	158	PK	Horizontal	PASS
6	10233.5000	50.53	46.56	-3.97	74.00	27.44	150	188	PK	Horizontal	PASS

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1354.2000	40.65	40.25	-0.40	74.00	33.75	150	77	PK	Vertical	PASS
2	1838.8000	41.68	43.00	1.32	74.00	31.00	150	68	PK	Vertical	PASS
3	3948.0000	61.48	44.10	-17.38	74.00	29.90	150	338	PK	Vertical	PASS
4	5910.5000	56.24	43.78	-12.46	74.00	30.22	150	346	PK	Vertical	PASS
5	6591.5000	54.68	44.64	-10.04	74.00	29.36	150	134	PK	Vertical	PASS
6	9964.0000	51.42	47.38	-4.04	74.00	26.62	150	248	PK	Vertical	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Appendix J: Conducted emission AC power port

Test Result

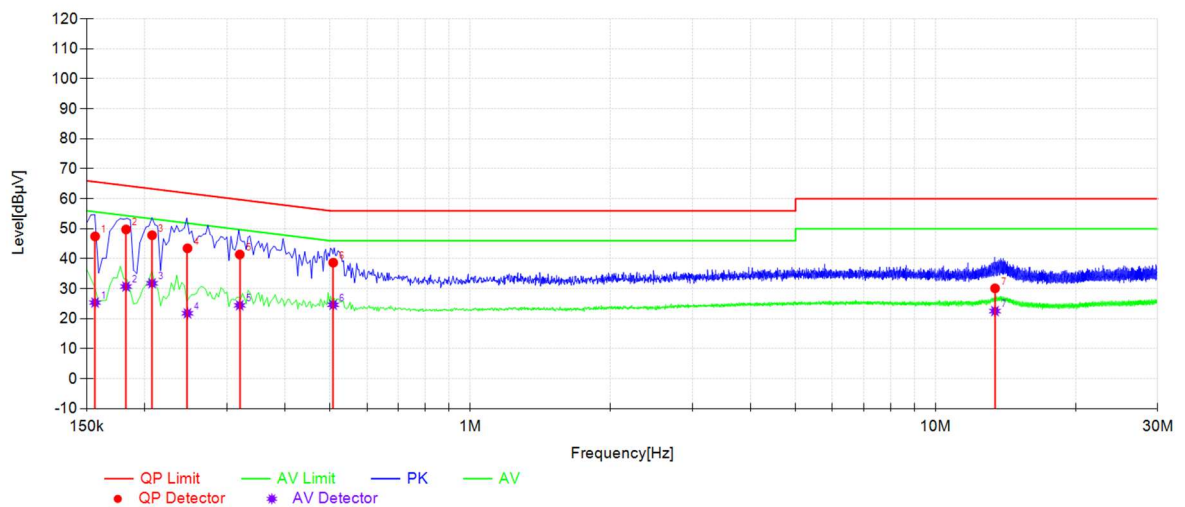

Final Data List										
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Type	Verdict
1	0.1562	10.26	47.46	65.66	18.20	25.38	55.66	30.28	L1	PASS
2	0.1821	10.31	49.79	64.39	14.60	30.74	54.39	23.65	L1	PASS
3	0.2071	10.35	47.85	63.32	15.47	31.82	53.32	21.50	L1	PASS
4	0.2468	10.33	43.50	61.86	18.36	21.81	51.86	30.05	L1	PASS
5	0.3196	10.31	41.43	59.72	18.29	24.48	49.72	25.24	L1	PASS
6	0.5075	10.25	38.71	56.00	17.29	24.66	46.00	21.34	L1	PASS
7	13.4164	10.52	30.14	60.00	29.86	22.56	50.00	27.44	L1	PASS

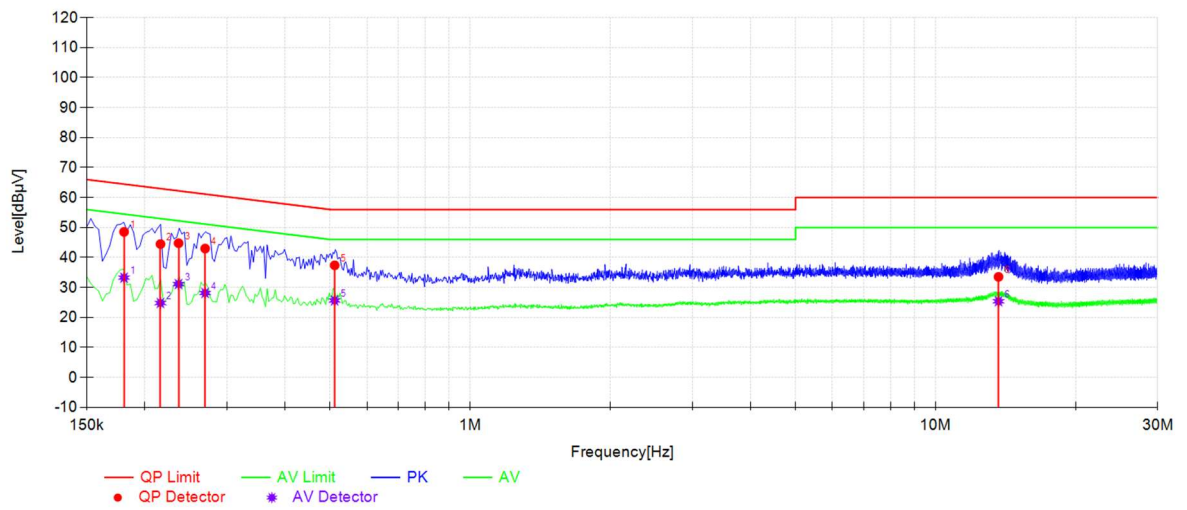

Final Data List										
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Type	Verdict
1	0.1803	10.35	48.55	64.47	15.92	33.28	54.47	21.19	N	PASS
2	0.2159	10.34	44.50	62.98	18.48	24.82	52.98	28.16	N	PASS
3	0.2361	10.34	44.79	62.23	17.44	31.14	52.23	21.09	N	PASS
4	0.2693	10.33	43.00	61.14	18.14	28.17	51.14	22.97	N	PASS
5	0.5112	10.25	37.41	56.00	18.59	25.67	46.00	20.33	N	PASS
6	13.6536	10.60	33.56	60.00	26.44	25.40	50.00	24.60	N	PASS