



**FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
CERTIFICATION TEST REPORT**

FOR

GT-C3592,GT-C3590~BT3.0 + HS +GSM 850/1900MHz Feature phone

MODEL NUMBER: GT-C3592/GT-C3590

FCC ID: A3LGTC3592

REPORT NUMBER: 13I15211-1, REVISION A

ISSUE DATE: June 27, 2013

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

Prepared by

**UL VERFICIATION SERVICES LLC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
---	6/17/13	Initial Issue	P. Kim
A	6/27/13	Updated Power values	P. Kim

TABLE OF CONTENTS

2. ATTESTATION OF TEST RESULTS	4
3. TEST METHODOLOGY	5
4. FACILITIES AND ACCREDITATION	5
5. CALIBRATION AND UNCERTAINTY	5
5.1. MEASURING INSTRUMENT CALIBRATION	5
5.2. SAMPLE CALCULATION	5
5.3. MEASUREMENT UNCERTAINTY.....	5
6. EQUIPMENT UNDER TEST	6
6.1. DESCRIPTION OF EUT	6
6.2. MAXIMUM OUTPUT POWER.....	6
6.3. SOFTWARE AND FIRMWARE.....	6
6.4. DESCRIPTION OF AVAILABLE ANTENNAS	6
6.5. WORST-CASE CONFIGURATION AND MODE.....	7
6.6. DESCRIPTION OF TEST SETUP.....	7
TEST AND MEASUREMENT EQUIPMENT	9
7. RF POWER OUTPUT VERIFICATION	10
7.1. GPRS MODE.....	10
8. CONDUCTED TEST RESULTS	12
8.1. OCCUPIED BANDWIDTH	12
████ GPRS MODE.....	13
8.2. BAND EDGE.....	17
████ GPRS MODE.....	18
8.3. OUT OF BAND EMISSIONS.....	20
████ GPRS MODE.....	21
9. FREQUENCY STABILITY	25
10. RADIATED TEST RESULTS.....	27
10.1. RADIATED POWER (ERP & EIRP).....	27
10.2. FIELD STRENGTH OF SPURIOUS RADIATION	31
11. SETUP PHOTOS.....	34

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

EUT DESCRIPTION: GSM850/1900 Phone

MODEL: GT-C3592

SERIAL NUMBER: 3598805006975301(Rad) / 35598805006978701 (Cond)

DATE TESTED: June 1, 2013 – June 12, 2013

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H AND 24E	PASS

UL CCS tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:

Tested By:



PHILIP KIM
WISE PROGRAM MANAGER
UL VERIFICATION SERVICES

STEVEN TRAN
WISE LAB TECHNICIAN
UL VERIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 2, FCC CFR 47 Part 22, and FCC CFR Part 24.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a BT3.0 + HS +GSM 850/1900MHz clam shell feature phone

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak of both conducted and ERP / EIRP output powers as follows:

Part 22/24 Band					
Frequency range (MHz)	Modulation	Conducted		ERP/EIRP	
		dBm	mW	dBm	mW
824.2 - 848.8	GSM	33.13	2055.9	26.51	447.7
1850.2-1909.8	GSM	29.89	975.0	30.61	1150.8

5.3. SOFTWARE AND FIRMWARE

The EUT was tested with SW Version C3592.001 and HW Version REV0.1.

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an integral antenna with a maximum peak gain as follow:

Frequency (MHz)	Gain (dBi)
850MHz	-5.6
1900MHz	4.7

5.5. WORST-CASE CONFIGURATION AND MODE

Based on the investigation results, the highest peak power and enhanced data rate is the worst-case scenario for all measurements.

Worst-case modes: GPRS, UMTS WCDMA and UMTS HSUPA Sub-test 3.

Since the EUT is a portable device, to determine the worst/highest emissions, the X, Y, and Z orientations of the EUT with respect to the turntable and the worst among them with headset and an AC adapter were investigated. After the investigations, Y-Orientation without AC adapter and headset was the worst case for cell bands, and Z-Orientation for PCS bands.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	ETA0U80JBE	BC06CS/A-E	NA
Headset	Samsung	NA	NA	NA

I/O CABLES (CONDUCTED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	RF	1	Antenna Port	Un-Shielded	0.2m	NA
2	RF In/Out	1	Call Box	Un-Shielded	0.5m	NA
3	RF Out	1	Spectrum Analyzer	None	None	NA


I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC	1	DC	Un-shielded	1m	NA
2	Jack	1	Earphone	Un-shielded	1.2m	NA


TEST SETUP

The EUT is a stand-alone device. A link is established between the EUT and the communications test set.

SETUP DIAGRAM FOR RF CONDUCTED TESTS

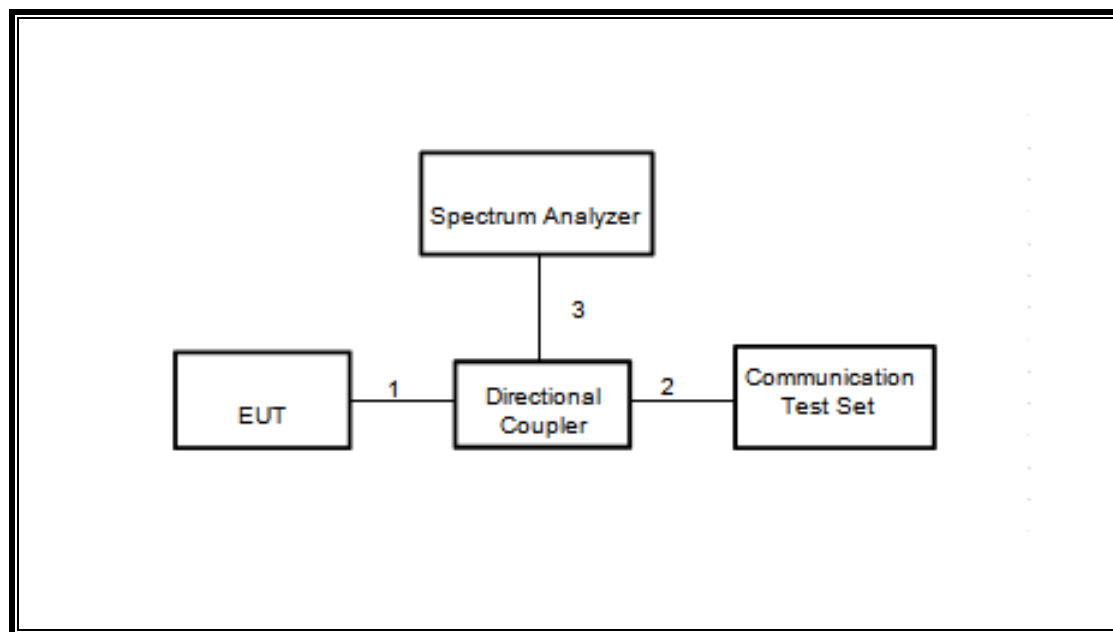

SETUP DIAGRAM FOR RF RADIATED TESTS

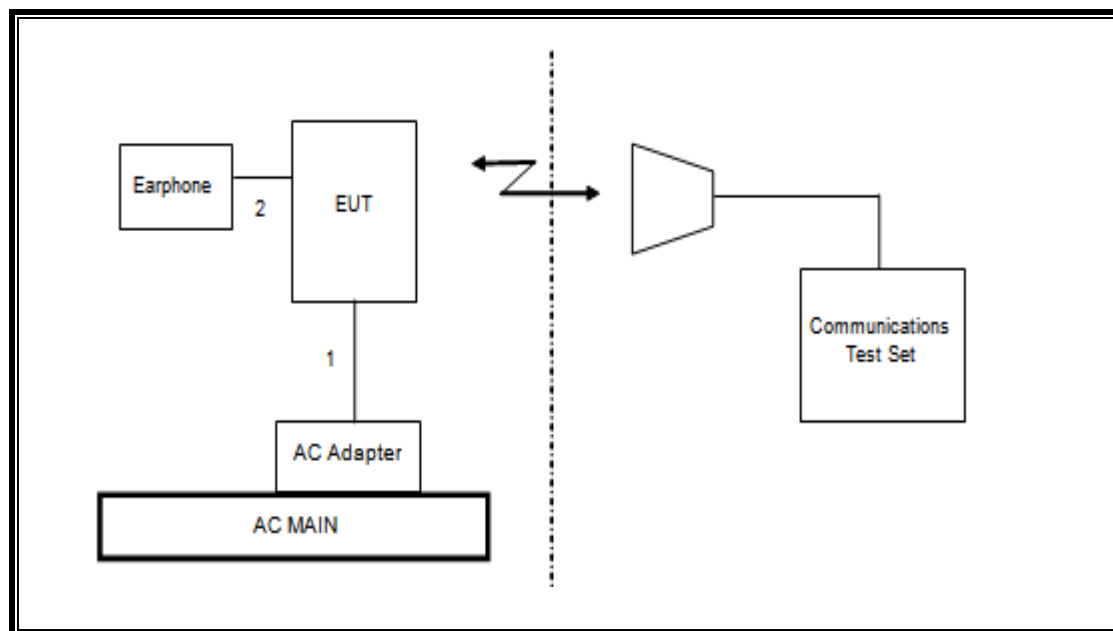

TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn, 18 GHz	EMCO	3115	C00872	10/25/13
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00885	12/11/13
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/14
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	10/22/13
Communication Test Set	Agilent / HP	E5515C	C01086	11/10/13
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/14
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02689	CNR
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01016	08/14/13
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	07/06/13
Antenna, Tuned Dipole 400~1000 MHz	ETS	3121C DB4	C00993	02/14/14

6. RF POWER OUTPUT VERIFICATION

6.1. GPRS MODE

TEST PROCEDURE

The transmitter output was connected to the input terminal of Directional Coupler via calibrated coaxial cable. The output coupling terminal of the Directional Coupler was directly connected to a spectrum analyzer while the output through terminal connected to the communication test set via calibrated coaxial cable.

The output power was measured with the spectrum analyzer at the low, middle and high channel in each band.

- Set the spectrum analyzer span wide enough or greater than the modulated signal BW.
- Set a spectrum analyzer at peak detection mode with VBW $\geq$ RBW $\geq$ 26dB BW, typically 3MHz.
- Set a marker to point the corresponding peak value.

GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press Connection control to choose the different menus

Press RESET > choose all to reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM+GPRS or GSM+EGPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850/900

> 27 dBm for EGPRS 850/900

> 30 dBm for GPRS1800/1900

> 26 dBm for EGPRS1800/1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0> 4 dB

Slot Config > Unchanged (if already set under MS Signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3 (Default)
Network Coding Scheme > CS1 (GPRS) and MCS5 (EGPRS)
Bit Stream > 2E9-1PSR Bit Pattern
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection Press Signal On to turn on the signal and change settings

RESULTS

CELL BAND

Mode	Ch.	f (MHz)	4 Down 1 Up	3 Down 2 Up	2 Down 3 Up	1 Down 4 Up
			Burst Power	Burst Power	Burst Power	Burst Power
GPRS	128	1850.2	32.81	30.62	29.59	28.55
	190	1880.0	32.85	30.94	29.93	28.93
	251	1909.8	32.82	31.11	30.21	29.22

PCS BAND

Mode	Ch.	f (MHz)	4 Down 1 Up	3 Down 2 Up	2 Down 3 Up	1 Down 4 Up
			Burst Power	Burst Power	Burst Power	Burst Power
GPRS	512	1850.2	30.00	27.85	26.8	25.77
	661	1880.0	29.85	27.69	26.61	25.58
	810	1909.8	29.96	27.81	26.75	25.68

7. CONDUCTED TEST RESULTS

7.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED



- GPRS


RESULTS

Band	Mode	Channel	f (MHz)	99% BW (kHz)	-26dB BW (kHz)
Cellular	GPRS	128	824.20	337.60	475.85
		190	836.60	336.90	469.94
		251	848.80	336.20	478.88
PCS		512	1850.2	337.07	464.17
		661	1880.0	338.26	472.56
		810	1909.8	337.97	465.90



GPRS MODE


CELL BAND

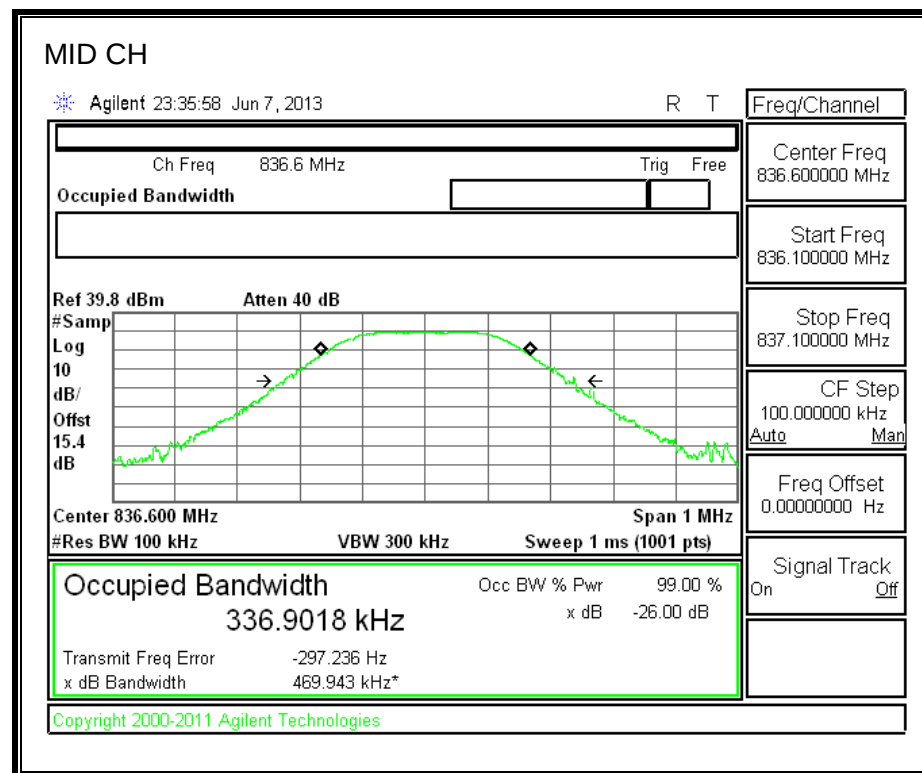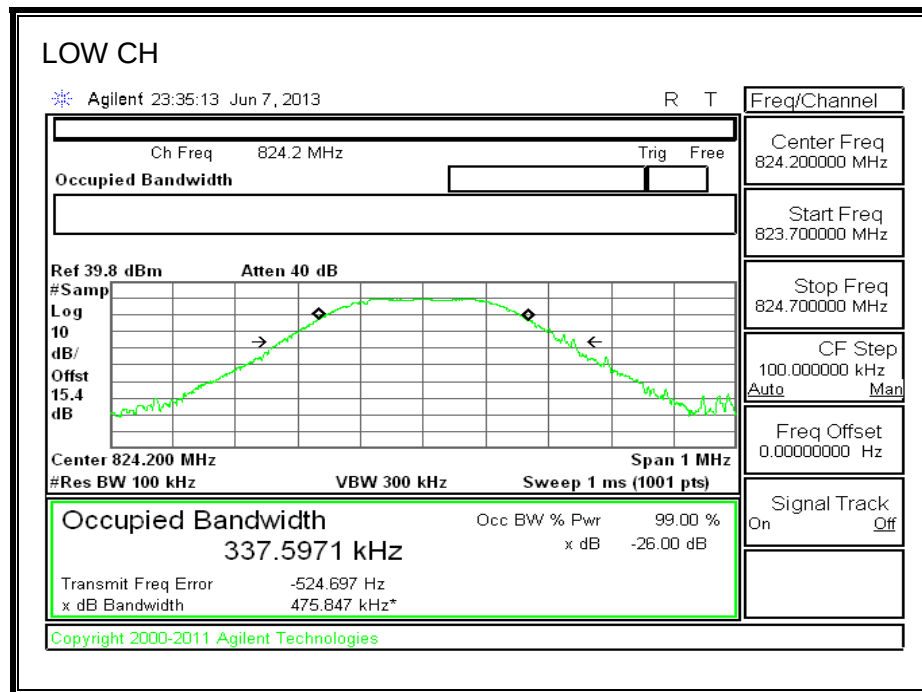

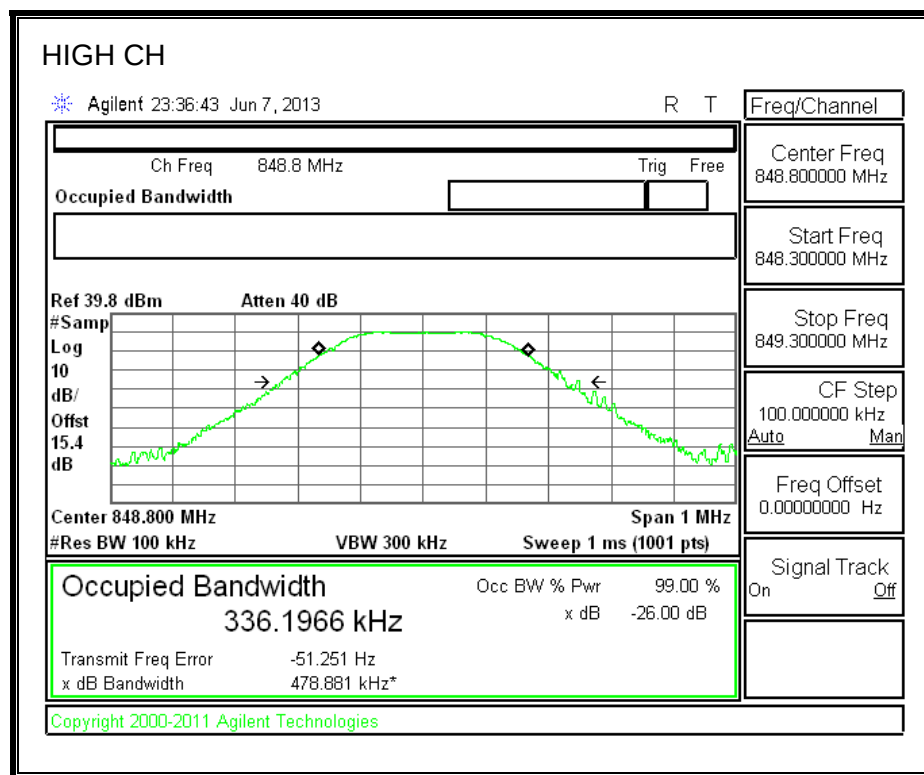

PCS Band

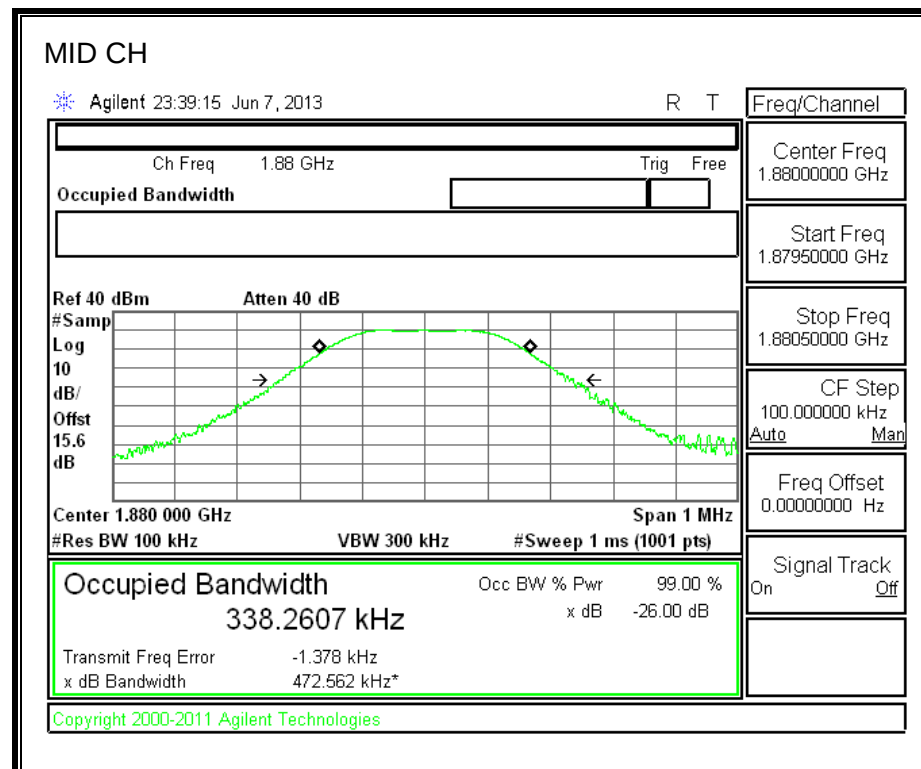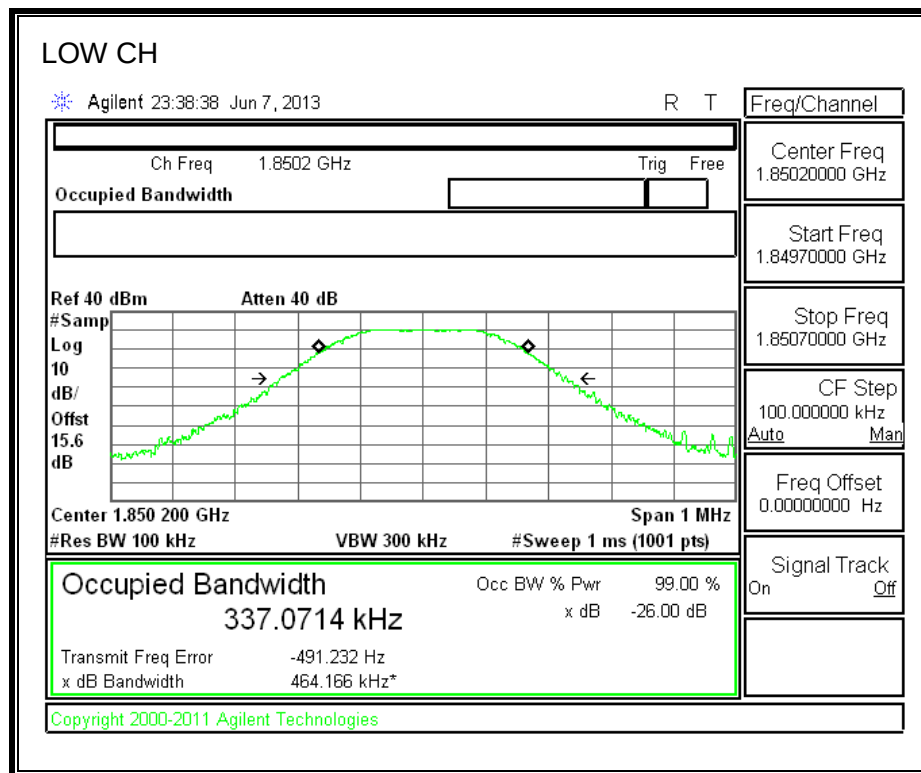

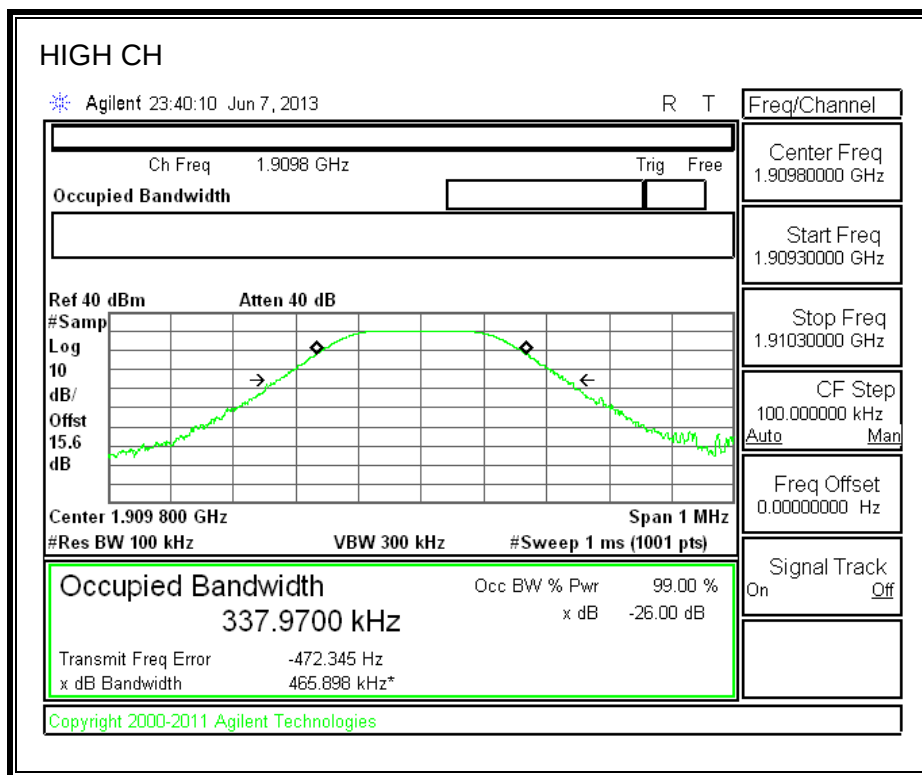

7.2. BAND EDGE

RULE PART(S)

FCC: §22.359, 24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

The transmitter output was connected to a Agilent 8960 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

- Set the spectrum analyzer span to include the block edge frequency (824, 848, 1850, 1910MHz)
- Set a marker to point the corresponding band edge frequency in each test case.
- Set display line at -13 dBm
- Set resolution bandwidth to at least 1% of emission bandwidth.



MODES TESTED

- GPRS



RESULTS

GPRS MODE

CELL BAND

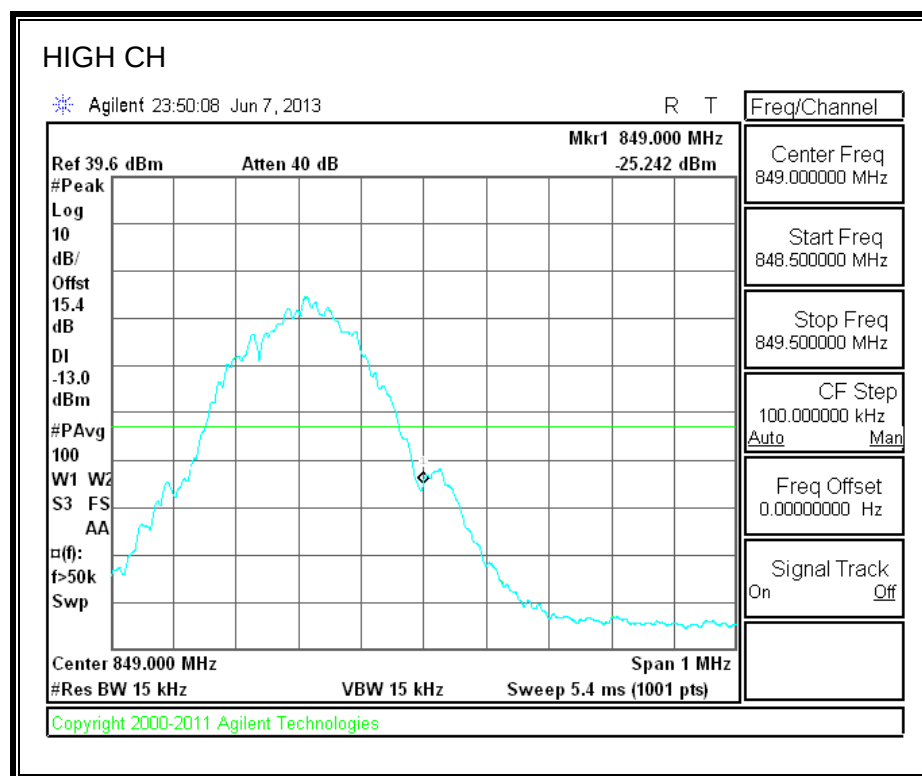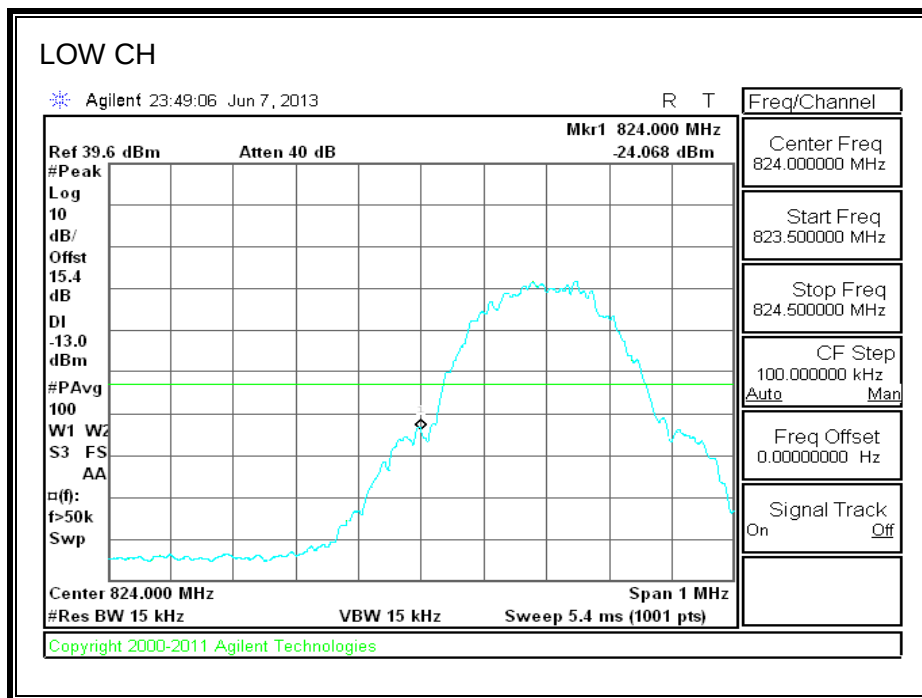

PCS BAND

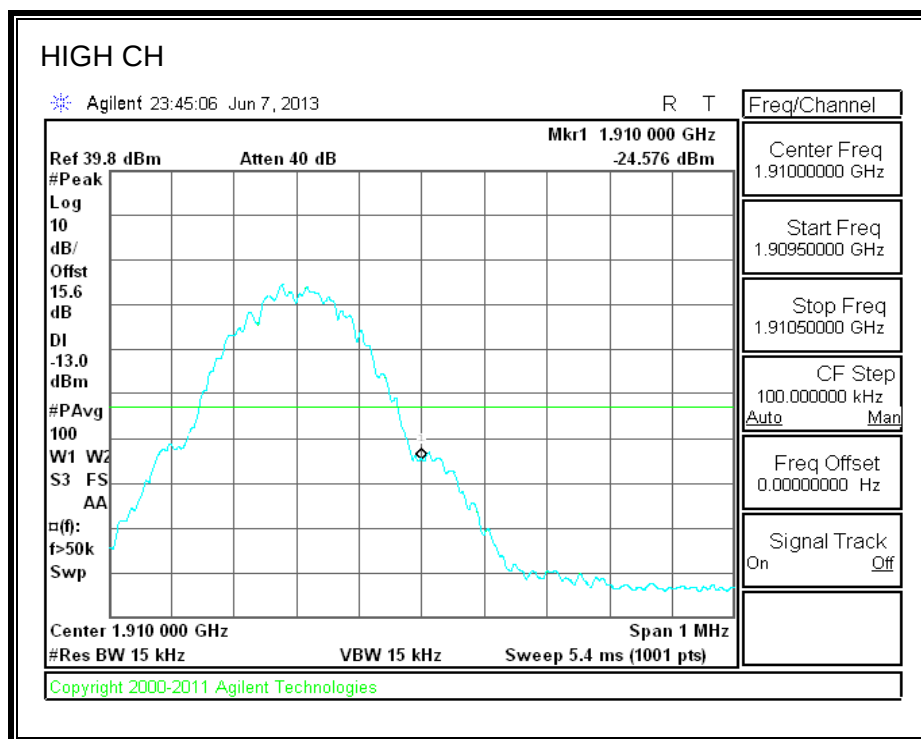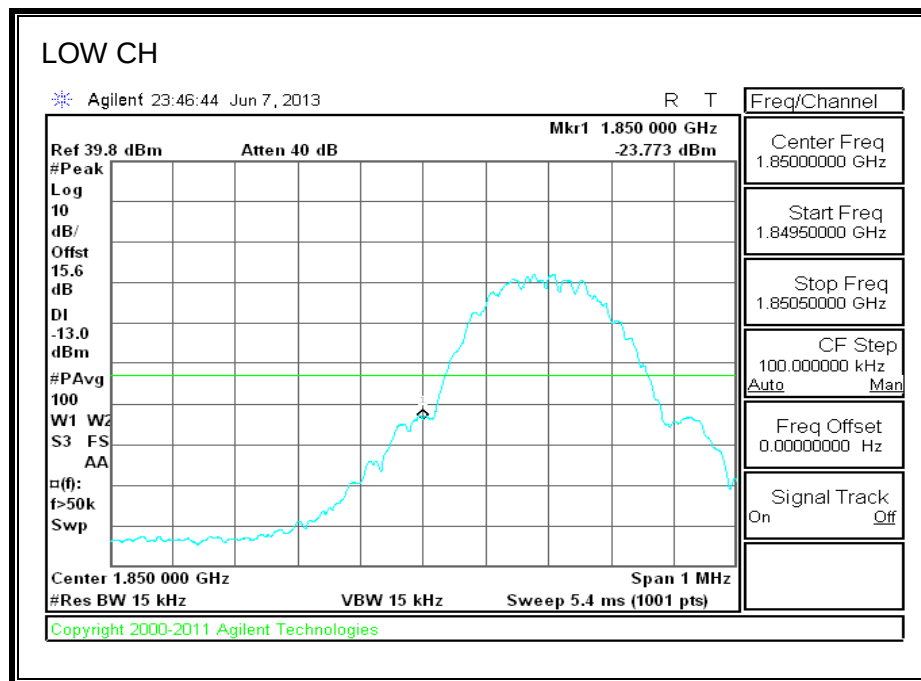

7.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- Set display line at -13 dBm
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.



MODES TESTED


- GPRS

RESULTS



GPRS MODE


CELL BAND

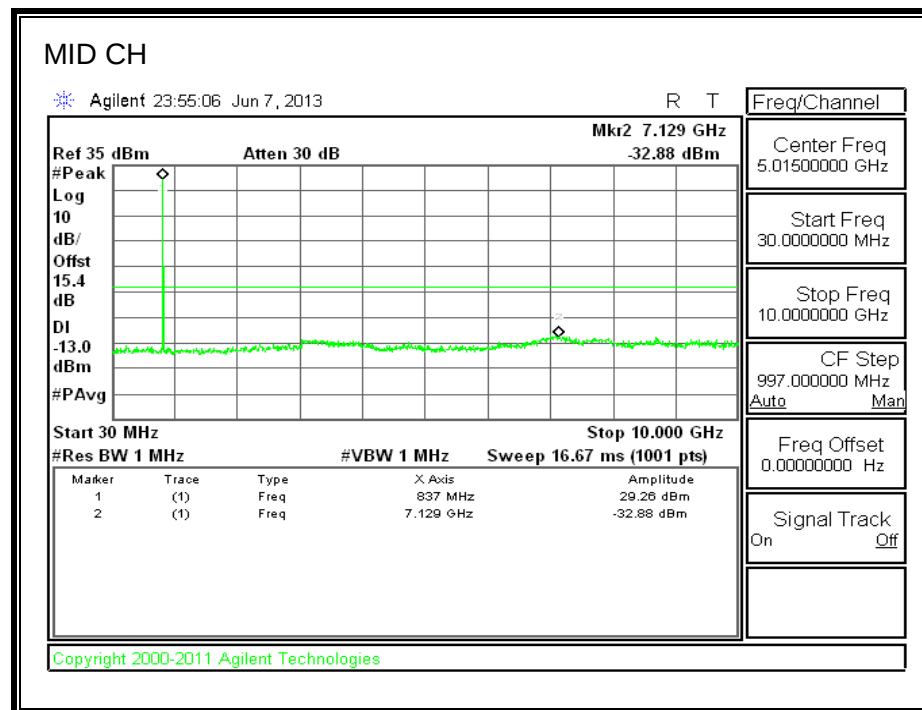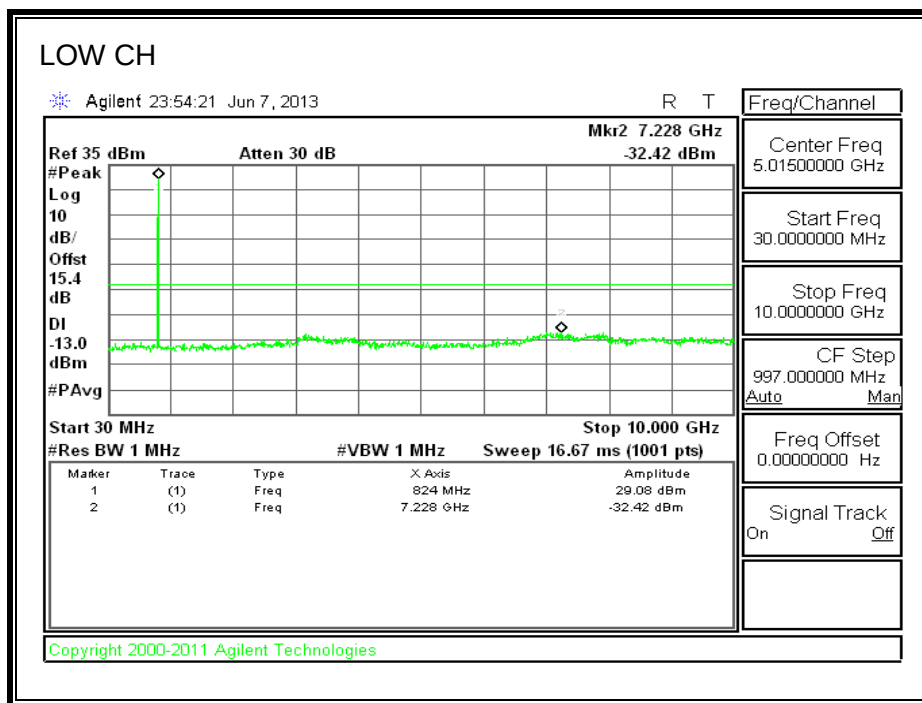

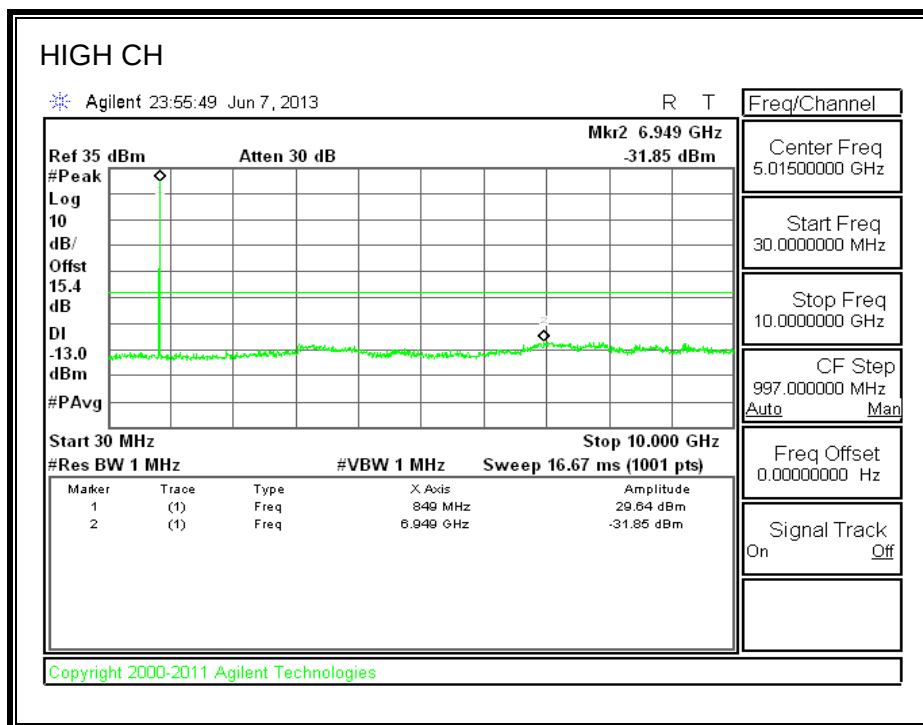

PCS BAND

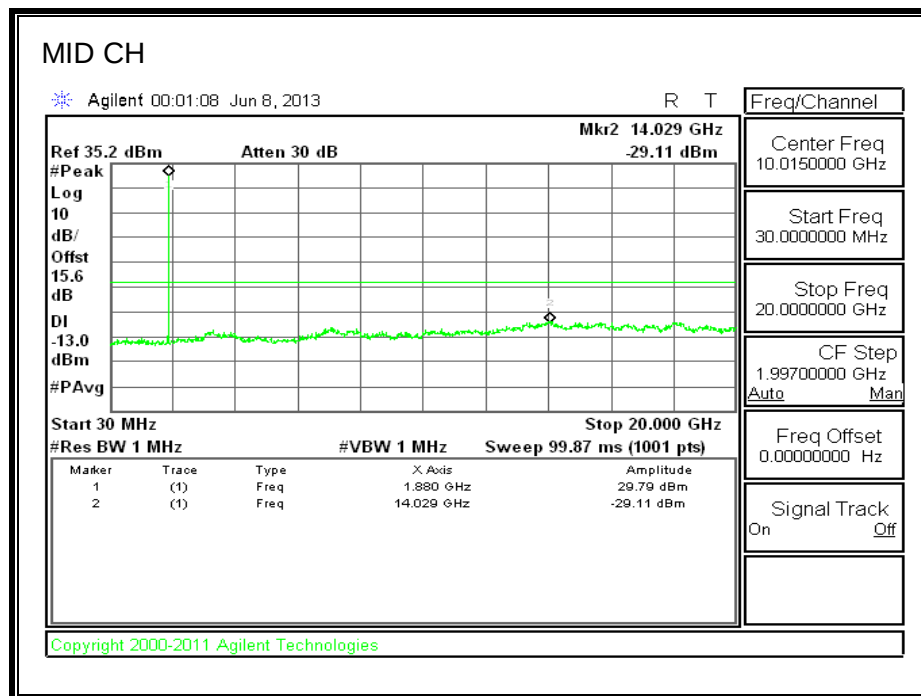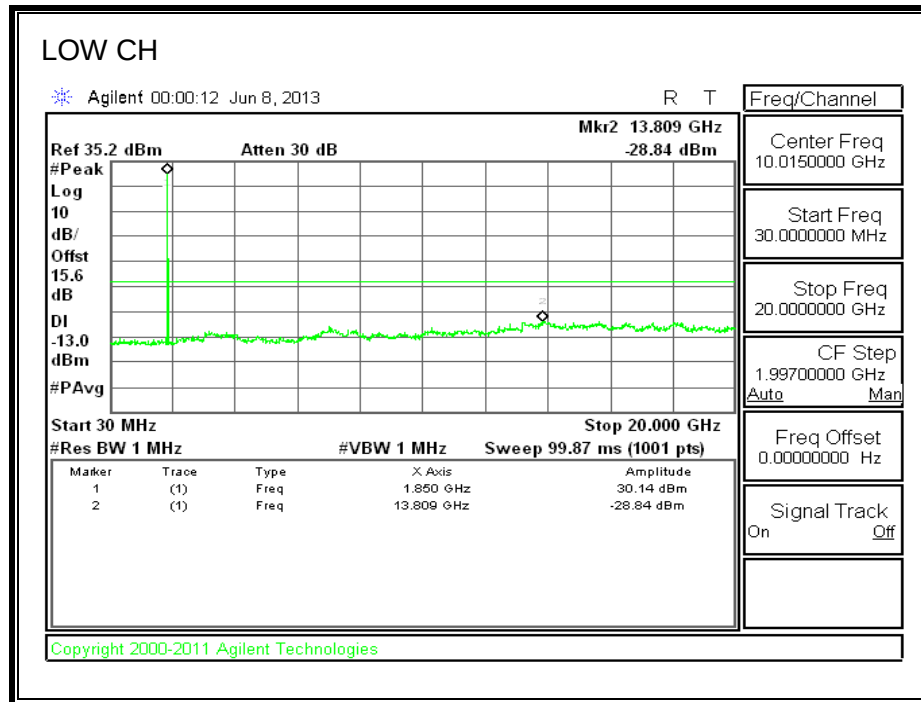

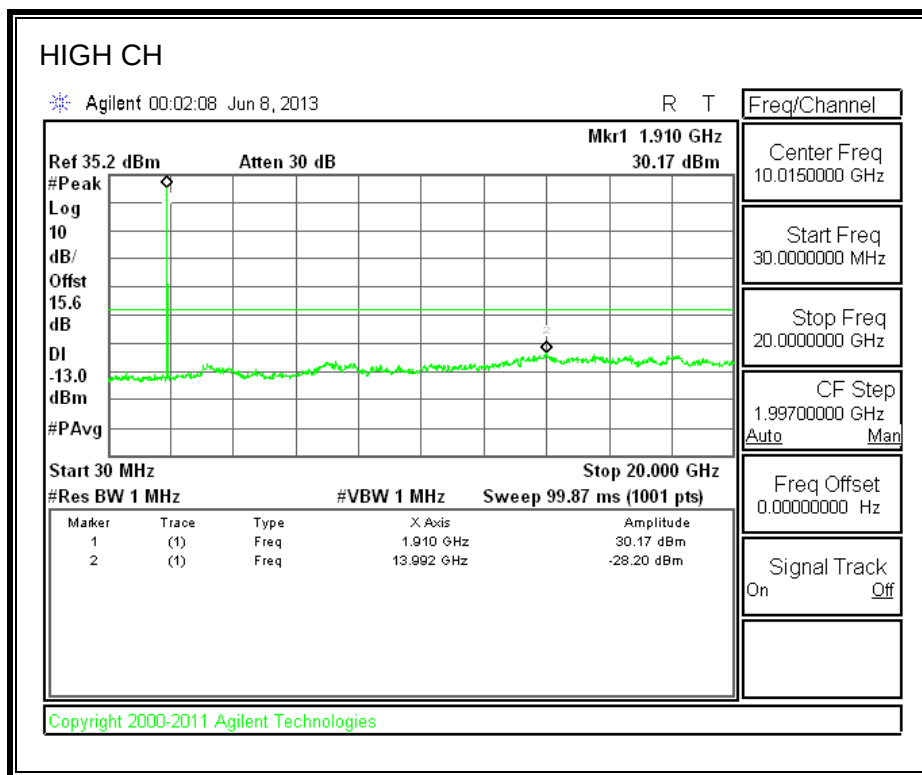

8. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235

LIMITS

- §22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.
- §24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use Agilent 8960 with Frequency Error measurement capability.

- Temp. = -30° to $+50^{\circ}\text{C}$
- Voltage = 85% - 115%

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- GPRS
- UMTS

RESULTS

See the following pages

CELL, GPRS MODULATION – MID CHANNEL

Reference Frequency: Cellular Mid Channel 836.600027MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	50	836.600005	0.002	2.5
3.70	40	836.600011	-0.005	2.5
3.70	30	836.600002	0.006	2.5
3.70	20	836.600007	0	2.5
3.70	10	836.600006	0.001	2.5
3.70	0	836.600005	0.002	2.5
3.70	-10	836.600004	0.004	2.5
3.70	-20	836.600008	-0.001	2.5
3.70	-30	836.600009	-0.002	2.5

Reference Frequency: Cellular Mid Channel 836.600027MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	20	836.600006	0	2.5
4.20	20	836.600003	0.004	2.5
3.30	20	836.600002	0.005	2.5
End Volt(3.2)	20		1000000.000	2.5

PCS, GPRS MODULATION – MID CHANNEL

Reference Frequency: PCS Mid Channel 1880.000036MHz @ 20°C Limit: within the authorized block or +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	50	1880.000006	-0.003	2.5
3.70	40	1880.000002	-0.001	2.5
3.70	30	1880.000003	-0.001	2.5
3.70	20	1880.000001	0	2.5
3.70	10	1880.000005	-0.002	2.5
3.70	0	1880.000010	-0.005	2.5
3.70	-10	1880.000004	-0.002	2.5
3.70	-20	1880.000008	-0.004	2.5
3.70	-30	1880.000007	-0.003	2.5

Reference Frequency: PCS Mid Channel 1880.000036MHz @ 20°C Limit: within the authorized block or +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	20	1880.000001	0.00000	2.5
4.20	20	1880.000004	-0.00160	2.5
3.30	20	1880.000003	-0.00106	2.5
End Volt(3.2)	20		1000000.00000	2.5

9. RADIATED TEST RESULTS

9.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

TEST PROCEDURE

ANSI / TIA / EIA 603 Clause 2.2.17

The ERP/EIRP power was measured with the spectrum analyzer which attached with receiver antenna via calibrated cable. The measurements have been taken at the low, middle and high channel in each band.

- Set the spectrum analyzer span wide enough or greater than the modulated signal BW.
- Set a spectrum analyzer at peak detection mode with VBW $\geq$ RBW $\geq$ 26dB BW, typically 3MHz for GSM and 5MHz for WCDMA modes respectively.
- Set a marker to point the corresponding peak value.

MODES TESTED

- GSM

RESULTS

Mode	Channel	f (MHz)	ERP	
			dBm	mW
GSM	128	824.20	23.12	205.12
	190	836.60	24.25	266.07
	251	848.80	26.51	447.71

Mode	Channel	f (MHz)	EIRP	
			dBm	mW
GSM	512	1850.20	25.77	377.57
	661	1880.00	30.61	1150.80
	810	1909.80	30.31	1073.99

GPRS 850 (Cellular Band)

**High Frequency Substitution Measurement
Compliance Certification Services Chamber B**

Company: Samsung
Project #: 13I15211
Date: 06/13/13
Test Engineer: Steven Tran
Configuration: EUT with AC and HS
Mode: TX,GSM 850

Test Equipment:

Receiving: Sunol T243, and Chamber B N-type Cable (Setup this one for testing EUT)

Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 208947003) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.20	23.72	V	0.6	0.0	23.12	38.5	-15.3	
824.20	22.72	H	0.6	0.0	22.12	38.5	-16.3	
836.60	23.82	V	0.6	0.0	23.22	38.5	-15.2	
836.60	24.85	H	0.6	0.0	24.25	38.5	-14.2	
848.80	23.84	V	0.6	0.0	23.24	38.5	-15.2	
848.80	27.11	H	0.6	0.0	26.51	38.5	-11.9	

Rev. 3.17.11

GSM 1900 (Cellular Band)

**High Frequency Fundamental Measurement
Compliance Certification Services Chamber A**

Company: Samsung
Project #: 13I15211
Date: 06/06/13
Test Engineer: Lieu Nguyen
Configuration: EUT with AC apdater and headset
Mode: TX, GSM 1900 band

Test Equipment:

Receiving: Horn T59, and Camber A SMA Cables
Substitution: Horn T217 Substitution, 4ft SMA Cable (244639001) Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
1.852	16.3	V	0.85	8.46	23.91	33.0	-9.1	
1.852	18.1	H	0.85	8.52	25.77	33.0	-7.2	
1.880	23.0	V	0.85	8.46	30.61	33.0	-2.4	
1.880	19.8	H	0.85	8.52	27.47	33.0	-5.5	
1.909	22.7	V	0.85	8.46	30.31	33.0	-2.7	
1.909	18.7	H	0.85	8.52	26.37	33.0	-6.6	

Rev. 3.17.11

9.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

MODES TESTED

- GPRS
- UMTS REL 99, and HSUPA

RESULTS

GPRS (Cellular Band)

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		13I15211							
Date:		06/13/13							
Test Engineer:		Steven Tran							
Configuration:		Y Position, all peripherals							
Mode:		Tx, 850MHz GPRS MODE							
Chamber		Pre-amplifier		Filter		Limit			
5m Chamber B		T34 8449B		Filter 1		Part 22			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, (824.2MHz)									
1.648	-20.5	V	3.0	37.4	1.0	-56.9	-13.0	-43.9	
2.473	-15.1	V	3.0	36.4	1.0	-50.5	-13.0	-37.5	
1.648	-23.3	H	3.0	37.4	1.0	-59.7	-13.0	-46.7	
2.473	-16.3	H	3.0	36.4	1.0	-51.7	-13.0	-38.7	
Mid Ch, (836.6MHz)									
1.673	-18.8	V	3.0	37.3	1.0	-55.2	-13.0	-42.2	
2.510	-20.5	V	3.0	36.4	1.0	-55.8	-13.0	-42.8	
1.673		H	3.0	37.3	1.0	-36.3	-13.0	-23.3	
2.510	-20.6	H	3.0	36.4	1.0	-56.0	-13.0	-43.0	
High Ch, (848.8MHz)									
1.698	-15.4	V	3.0	37.3	1.0	-51.7	-13.0	-38.7	
2.546	-21.9	V	3.0	36.3	1.0	-57.2	-13.0	-44.2	
1.698	-15.8	H	3.0	37.3	1.0	-52.1	-13.0	-39.1	
2.546	-19.5	H	3.0	36.3	1.0	-54.8	-13.0	-41.8	
Rev: 03.03.09									
Note: No other emissions were detected above the system noise floor.									

GPRS (PCS Band)

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		13I15211							
Date:		06/13/13							
Test Engineer:		Steven Tran							
Configuration:		Y position, all peripheals							
Mode:		Tx, 1900MHz GPRS MODE							
Chamber		Pre-amplifier		Filter		Limit			
5m Chamber B		T34 8449B		Filter 1		Part 24			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.2MHz									
3.700	-9.9	V	3.0	35.4	1.0	-44.3	-13.0	-31.3	
5.551	-17.8	V	3.0	34.7	1.0	-51.5	-13.0	-38.5	
3.700	-11.7	H	3.0	35.4	1.0	-46.1	-13.0	-33.1	
5.551	-18.1	H	3.0	34.7	1.0	-51.8	-13.0	-38.8	
Mid Ch, 1880MHz									
3.760	-9.5	V	3.0	35.3	1.0	-43.9	-13.0	-30.9	
5.640	-18.2	V	3.0	34.7	1.0	-51.9	-13.0	-38.9	
3.760	-10.0	H	3.0	35.3	1.0	-44.3	-13.0	-31.3	
5.640	-17.4	H	3.0	34.7	1.0	-51.1	-13.0	-38.1	
High Ch, 1909.8MHz									
3.820	-12.0	V	3.0	35.3	1.0	-46.2	-13.0	-33.2	
5.729	-15.5	V	3.0	34.7	1.0	-49.3	-13.0	-36.3	
3.820	-9.9	H	3.0	35.3	1.0	-44.2	-13.0	-31.2	
5.729	-13.5	H	3.0	34.7	1.0	-47.2	-13.0	-34.2	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									