



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 24 & 27SUBPART CERTIFICATION REPORT

Model Tested:	SGH-T589
FCC ID (Requested):	A3LSGHT589
Report No:	FI-106-R2
Job No:	FI-106
Date issued:	May 2, 2011

- Abstract -

All measurement reported here in accordance with FCC Rules, 47CFR
Part2, Part24, Part27

Prepared By

HK LEE - Test Engineer

Authorized By

WT JANG - Technical Manager

© Copyright SAMSUNG Electronics 2011

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC Certification Information.....	3
1.1 §2.1033 General Information	3
2. INTRODUCTION	4
2.1 General	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST.....	6
5. FCC 3G MEASUREMENT PROCEDURES	7
5.1 Effective Radiated Power / Equivalent Isotropic Radiated Power	8
5.2 Radiated Spurious & Harmonic Emission	9
5.3 Occupied Bandwidth	11
5.4 Peak-Average Ratio.....	11
5.5 Spurious and Harmonic Emissions at Antenna Terminal	11
5.5.1 Occupied Bandwidth Emission Limits	11
5.5.2 Conducted Spurious Emission	13
5.6 Frequency Stability / Temperature Variation.....	14
6. TEST DATA	15
6.1 Equivalent Isotropic Radiated Power(E.I.R.P.)	15
6.2 Equivalent Isotropic Radiated Power(E.I.R.P.).....	16
6.3 PCS WCDMA Radiated Spurious & Harmonic measurement	17
6.4 AWS WCDMA Radiated Spurious & Harmonic measurement.....	18
6.5 PCS WCDMA Radiated Spurious & Harmonic Conversion Table	19
6.6 AWS WCDMA Radiated Spurious & Harmonic Conversion Table	20
6.7 Frequency Stability.....	21
6.7.1 PCS WCDMA Frequency Stability Table	21
6.7.2 AWS WCDMA Frequency Stability Table.....	22
6.7.3 PCS WCDMA Frequency Stability Graph.....	23
6.7.4 AWS WCDMA Frequency Stability Graph	25
7. SAMPLE CALCULATION	27
7.1 Emission Designator	27
8. CONCLUSION.....	28
9. TEST PLOTS.....	29

MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1 §2.1033 General Information

- Applicant Name: SAMSUNG ELECTRONICS CO., LTD.
- Address: 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- FCC ID: A3LSGHT589
- Model: SGH-T589
- Quantity: Quantity production is planned
- Emission Designators: 4M20F9W(PCS WCDMA),4M17F9W(AWS WCDMA)
- Tx Freq. Range: 1852.4 - 1907.6 MHz (PCS WCDMA)
1712.4 - 1752.5 MHz (AWS WCDMA)
- Rx Freq. Range: 1932.4 - 1987.6 MHz (PCS WCDMA)
2112.4 - 2152.5 MHz (AWS WCDMA)
- Max. Power Rating: 0.124 W PCS WCDMA(20.95dBm)
0.118 W AWS WCDMA(20.72 dBm)
- FCC Classification(s): Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type: 850/1900 GSM/GPRS/EDGE and AWS/PSC WCDMA/HSPA
Phone with Bluetooth and WLAN
- Modulation(s): WCDMA
- Frequency Tolerance: $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s): §24(E), §27(H), §2.
- Dates of Test: April 22-23, 2011
- Place of Test: SAMSUNG Lab,
- Test Report S/N: FI-106-R2

2. INTRODUCTION

2.1 General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**.
 The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742
 The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on the rotating device at the same height and at a distance of 3-meters from the receive antenna. The rotating device which can rotate horizontal axis was mounted on the turn unit to facilitate rotation around a vertical axis. The measurement was made for each horizontal/vertical position combination with receive antenna horizontally polarized. This measurement was repeated with receive antenna vertically polarized. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

- End of page -

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2011-10-21
	E4440A(3Hz~26.5GHz)	MY46187454	2012-03-08
Network Analyzer	8753E	JP38160590	2011-06-18
Pre-Amplifier	8449B	3008A00691	2011-12-15
Communication test set	8960	MY47510060	2012-03-08
	8960	GB42230535	2011-12-23
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2011-09-23
	BBHA9120	9120D-637	2011-09-24
Dipole Antenna	UHA 9105	9105-2412	2011-10-06
	UHA 9105	9105-2413	2012-07-15
Receive Antenna	HL040	353255/019	2011-10-26
Power Supply	E3640A	MY40003594	2011-06-17
	E3640A	MY40003595	2011-05-17
	E3632A	MY40022438	2012-03-08
Divider	11636B	51946	2011-06-25
	11636B	51942	2011-07-09
	11636B	56918	2011-08-31
High Pass Filter	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2011-11-15
	SH-241	92000548	2011-11-15
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. FCC 3G MEASUREMENT PROCEDURES

The maximum output power is a measure of the maximum power the UE can transmit (i.e. the actual power as would be measured assuming no measurement error) in a band width of at least $(1+\alpha)$ times the chip rate of the radio access mode

The default test configuration is configure an established radio link between the UE and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. Maximum output is verified according to 3GPP TS 34.121 Section 5.2

1. Configure TCP (Transmit Power Control) set to "All 1"s.
2. RMC and AMR connections at 12.2kbps are measured under 3.4kbps SRB (signaling radio bearer)
3. Measure the mean power of the UE in a bandwidth of at least $(1+\alpha)$ times the chip rate of the radio access mode. The mean power shall be averaged over at least one timeslot.

Table1
3GPP TS 34.121 Nominal Maximum Output Power

Operating Band	Power Class3		Power Class 4	
	Power (dBm)	Tol (dB)	Power (dBm)	Tol (dB)
Band II	+24	+1/-3	+21	+2/-2
Band IV	+24	+1/-3	+21	+2/-2

5.1 Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

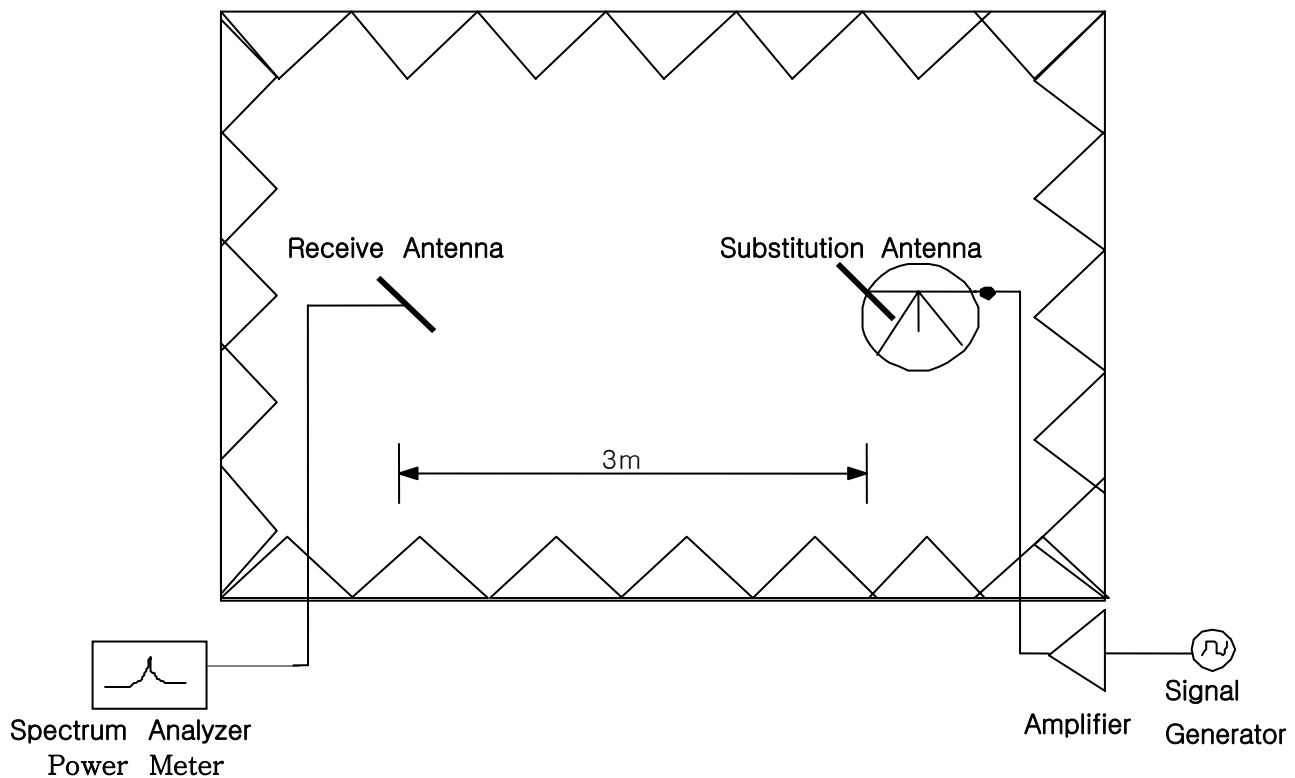


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2 Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

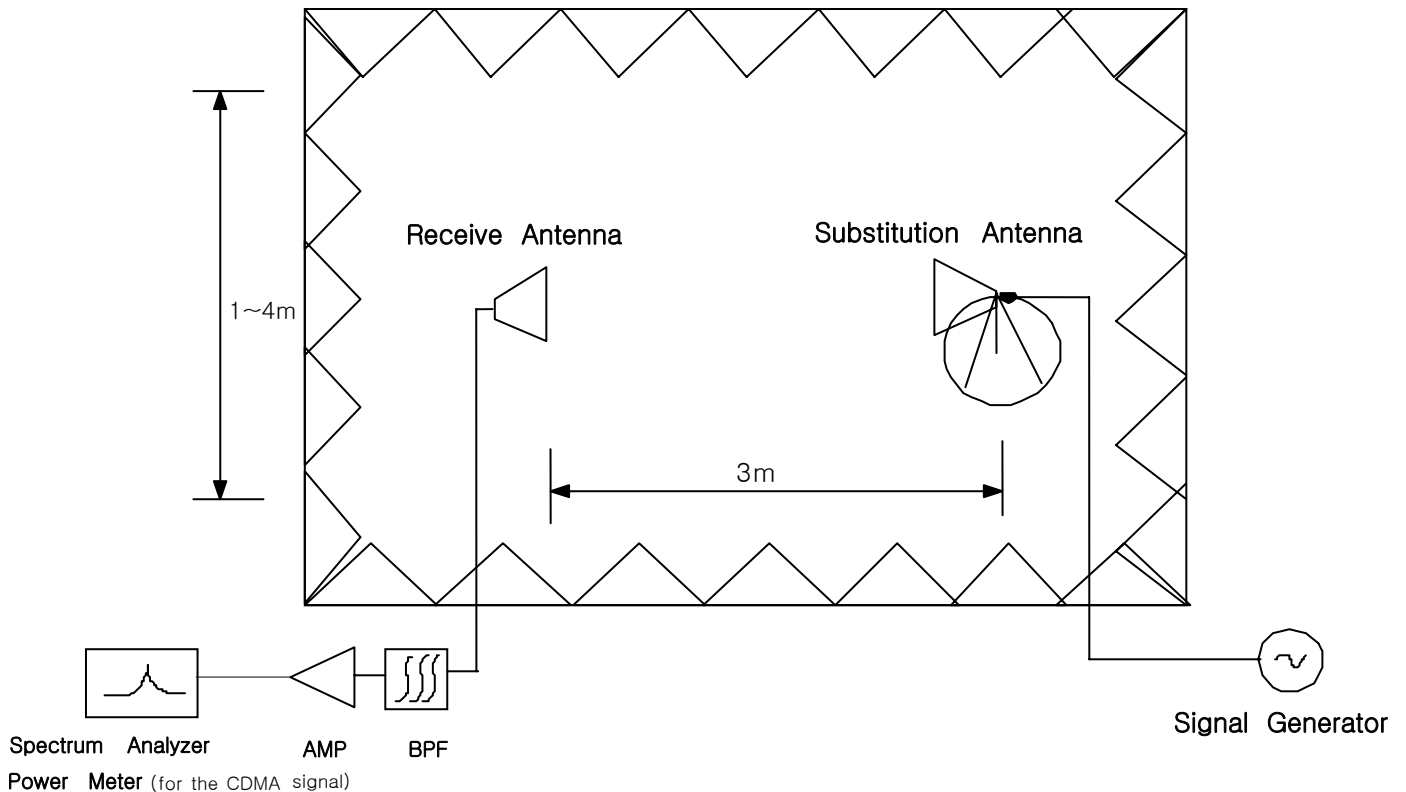


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 600 PCS Mode 2nd Harmonic(3760MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760MHz. So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

- End of page -

5.3 Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power. Plots of the EUT's occupied bandwidth are shown herein.

5.4 Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function(CCDF) measurement profile is used to determine the largest deviation between the An average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

5.5 Spurious and Harmonic Emissions at Antenna Terminal

5.5.1 Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

- End of page -

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 – 835	869 – 880
B	835 – 845	880 – 890
A* High	845 – 846.5	890 – 891.5
B*	846.5 – 849	891.5 – 894

Table 2. Cellular Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1710 – 1720	2110 – 2120
B	1720 – 1730	2120 – 2130
C	1730 – 1735	2130 – 2135
D	1735 – 1740	2135 – 2140
E	1740 – 1745	2140 – 2145
F	1745 – 1755	2145 – 2155

Table 3. Broadband AWS Service Frequency Blocks

5.5.2 Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log (P)$ dB. Limit equivalent to -13 dBm, calculation shown below.

$$43 + 10\log (0.333 \text{ W}) = 38.22\text{dB}$$

$$25.22 \text{ dBm} - 38.22 \text{ dB} = -13 \text{ dBm}$$

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13 dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (PCS Mode : 10MHz to 20GHz). A display line was placed at -13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.6 Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +50°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

- End of page -

6. TEST DATA

6.1 Equivalent Isotropic Radiated Power(E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS WCDMA

■Reference level

Frequency (MHz)	Output (dBm)	Polarization	P/M (dBm)	Ant gain (dBi)	Ref level (dBm)
1852.4	20.00	H	-19.29	9.60	-28.89
		V	-18.93	9.60	-28.53
1880.0	21.00	H	-17.93	9.60	-27.53
		V	-18.33	9.60	-27.93
1907.6	21.00	H	-18.47	9.60	-28.07
		V	-18.23	9.60	-27.83

■Result

Frequency (MHz)	From EUT Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1852.4	-28.70	V	327/80	19.83	0.096	Standard
1880.0	-27.98	V	217/90	20.95	0.124	Standard
1907.6	-28.48	H	276/10	20.59	0.115	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.2 Equivalent Isotropic Radiated Power(E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : AWS WCDMA

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization	P/M (dBm)	Ant gain (dBi)	Ref level (dBm)
1712.4	19.00	H	-18.97	9.70	-28.67
		V	-18.78	9.70	-28.48
1732.4	20.00	H	-17.95	9.60	-27.55
		V	-17.77	9.60	-27.37
1752.5	21.00	H	-16.99	9.60	-26.59
		V	-16.79	9.60	-26.39

■ Result

Frequency (MHz)	From EUT Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1712.4	-28.68	H	77/170	18.99	0.079	Standard
1732.4	-27.41	H	266/10	20.14	0.103	Standard
1752.5	-26.87	H	272/10	20.72	0.118	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.3 PCS WCDMA Radiated Spurious & Harmonic measurement

Operating Frequency : 1852.4 MHz(Low), 1880.00 MHz(Middle), 1907.60 MHz(High)

Measured Output Power : 20.95 dBm = 0.124 W

Modulation Signal : PCS

$$\text{Limit : } 43 + 10\log_{10}(P) = 33.95\text{dBc}$$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
9262	2	3704.80	-62.21	V	58.87
	3	5557.20	-67.10	V	58.54
	4	7409.60	-66.16	H	52.41
	5	9262.00	-	-	-
	6	11114.40	-	-	-
	7	12966.80	-	-	-
9400	2	3760.00	-60.61	H	56.63
	3	5640.00	-67.54	H	58.91
	4	7520.00	-64.69	V	51.42
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
9538	2	3815.20	-62.94	H	58.65
	3	5722.80	-68.69	V	59.75
	4	7630.40	-65.35	V	51.77
	5	9538.00	-	-	-
	6	11445.60	-	-	-
	7	13353.20	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.4 AWS WCDMA Radiated Spurious & Harmonic measurement

Operating Frequency : 1712.4 MHz(Low), 1732.4 MHz(Middle), 1752.5 MHz(High)

Measured Output Power : 20.72 dBm = 0.118 W

Modulation Signal : AWS

$$\text{Limit : } 43 + 10\log_{10}(P) = 33.72 \text{ dBc}$$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
1312	2	3424.80	-67.96	V	65.39
	3	5137.20	-69.98	H	61.76
	4	6849.60	-66.13	H	53.19
	5	8562.00	-	-	-
	6	10274.40	-	-	-
	7	11986.80	-	-	-
1412	2	3464.80	-66.62	H	64.68
	3	5197.20	-69.96	H	62.01
	4	6929.60	-65.83	H	53.60
	5	8662.00	-	-	-
	6	10394.40	-	-	-
	7	12126.80	-	-	-
1513	2	3505.20	-68.63	H	66.03
	3	5257.80	-69.19	V	61.29
	4	7010.40	-69.79	H	57.33
	5	8763.00	-	-	-
	6	10515.60	-	-	-
	7	12268.20	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.5 PCS WCDMA Radiated Spurious & Harmonic Conversion Table

Date : April 23, 2011.

Test Engineer : HK LEE

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = EIRP - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : V dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
9262	2	3704.80	-14.27	12.40	-11.10	-37.42	-37.29	-62.76	-62.21	59.29	58.87
	3	5557.20	-17.89	12.90	-8.00	-42.43	-42.51	-67.76	-67.10	59.28	58.54
	4	7409.60	-20.68	10.50	-2.80	-47.70	-47.31	-66.16	-66.98	52.41	53.62
	5	9262.00	-24.00	11.20	-0.20	-51.55	-50.34	-	-	-	-
	6	11114.40	-27.10	11.60	2.50	-55.14	-55.44	-	-	-	-
	7	12966.80	-29.17	12.90	3.30	-58.61	-58.58	-	-	-	-
9400	2	3760.00	-14.42	12.40	-11.00	-37.93	-37.89	-60.61	-65.40	56.63	61.46
	3	5640.00	-18.03	12.90	-7.90	-42.58	-42.73	-67.54	-68.09	58.91	59.31
	4	7520.00	-20.87	10.60	-2.70	-47.19	-47.22	-69.15	-64.69	55.91	51.42
	5	9400.00	-23.58	11.60	-1.00	-51.70	-51.98	-	-	-	-
	6	11280.00	-26.58	12.10	1.50	-55.95	-56.35	-	-	-	-
	7	13160.00	-28.58	12.80	2.80	-58.92	-59.14	-	-	-	-
9538	2	3815.20	-14.46	12.40	-10.90	-38.24	-38.04	-62.94	-63.71	58.65	59.62
	3	5722.80	-18.26	13.00	-7.70	-43.05	-42.89	-68.97	-68.69	59.87	59.75
	4	7630.40	-21.26	11.20	-2.90	-47.42	-47.53	-68.20	-65.35	54.73	51.77
	5	9538.00	-23.84	11.70	-0.90	-52.67	-51.88	-	-	-	-
	6	11445.60	-27.12	11.70	2.40	-56.20	-55.97	-	-	-	-
	7	13353.20	-28.83	12.30	3.50	-60.16	-59.86	-	-	-	-

6.6 AWS WCDMA Radiated Spurious & Harmonic Conversion Table

Date : April 23, 2011.

Test Engineer : HK LEE

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = EIRP - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : V dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
1312	2	3424.80	-13.72	12.60	-11.90	-36.36	-36.29	-68.87	-67.96	66.23	65.39
	3	5137.20	-17.26	12.60	-8.30	-41.94	-41.89	-69.98	-70.01	61.76	61.84
	4	6849.60	-19.91	11.80	-4.90	-46.66	-46.32	-66.13	-66.14	53.19	53.54
	5	8562.00	-22.52	11.40	-1.90	-49.59	-49.53	-	-	-	-
	6	10274.40	-25.81	11.30	1.50	-53.23	-53.52	-	-	-	-
	7	11986.80	-27.58	12.60	2.00	-55.89	-55.94	-	-	-	-
1412	2	3464.80	-13.85	12.40	-11.50	-35.66	-35.82	-66.62	-67.99	64.68	65.89
	3	5197.20	-17.48	12.60	-8.10	-41.67	-41.54	-69.96	-70.08	62.01	62.26
	4	6929.60	-20.12	11.00	-3.90	-45.95	-45.98	-65.83	-66.33	53.60	54.07
	5	8662.00	-22.76	11.30	-1.50	-49.87	-50.11	-	-	-	-
	6	10394.40	-25.34	11.70	0.60	-55.06	-54.47	-	-	-	-
	7	12126.80	-27.98	12.70	2.30	-56.00	-56.00	-	-	-	-
1513	2	3505.20	-13.82	12.40	-11.60	-36.32	-36.28	-68.63	-68.87	66.03	66.31
	3	5257.80	-17.39	13.10	-8.70	-41.64	-41.62	-69.91	-69.19	61.99	61.29
	4	7010.40	-19.36	11.00	-4.60	-46.44	-45.98	-70.05	-69.79	57.33	57.53
	5	8763.00	-22.76	11.30	-1.50	-50.15	-49.70	-	-	-	-
	6	10515.60	-26.01	11.10	1.90	-54.39	-54.51	-	-	-	-
	7	12268.20	-28.70	12.80	2.90	-55.92	-56.67	-	-	-	-

6.7 Frequency Stability

6.7.1 PCS WCDMA Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 9400

Reference Voltage : 3.7VDC

Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	17.40	1,880,000,017	0.000001	0.009
100%		-30	-8.80	1,879,999,991	0.000000	-0.005
100%		-20	47.60	1,880,000,048	0.000003	0.025
100%		-10	28.00	1,880,000,028	0.000001	0.015
100%		0	-41.80	1,879,999,958	-0.000002	-0.022
100%		+10	25.80	1,880,000,026	0.000001	0.014
100%		+20	17.40	1,880,000,017	0.000001	0.009
100%		+30	-49.90	1,879,999,950	-0.000003	-0.027
100%		+40	-6.20	1,879,999,994	0.000000	-0.003
100%		+50	-4.40	1,879,999,996	0.000000	-0.002
85%	3.25	+20	22.00	1,880,000,022	0.000001	0.012
115%	4.26	+20	-16.90	1,879,999,983	-0.000001	-0.009
Batt. Endpoint	3.25	+20	-27.80	1,879,999,972	-0.000001	-0.015

Note : The temperature is varied from -30 °C to +50 °C using an environmental chamber.

The EUT is tested down to the battery end point

6.7.2 AWS WCDMA Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 9400

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	21.80	1,732,400,022	0.000001	0.013
100%		-30	10.70	1,732,400,011	0.000001	0.006
100%		-20	-22.00	1,732,399,978	-0.000001	-0.013
100%		-10	36.60	1,732,400,037	0.000002	0.021
100%		0	27.00	1,732,400,027	0.000002	0.016
100%		+10	-24.60	1,732,399,975	-0.000001	-0.014
100%		+20	21.80	1,732,400,022	0.000001	0.013
100%		+30	-21.80	1,732,399,978	-0.000001	-0.013
100%		+40	-7.00	1,732,399,993	0.000000	-0.004
100%		+50	-1.20	1,732,399,999	0.000000	-0.001
85%	3.25	+20	-15.30	1,732,399,985	-0.000001	-0.009
115%	4.26	+20	-5.90	1,732,399,994	0.000000	-0.003
Batt. Endpoint	3.25	+20	-15.30	1,732,399,985	-0.000001	-0.009

Note : The temperature is varied from -30 °C to +50 °C using an environmental chamber.


The EUT is tested down to the battery end point

6.7.3 PCS WCDMA Frequency Stability Graph

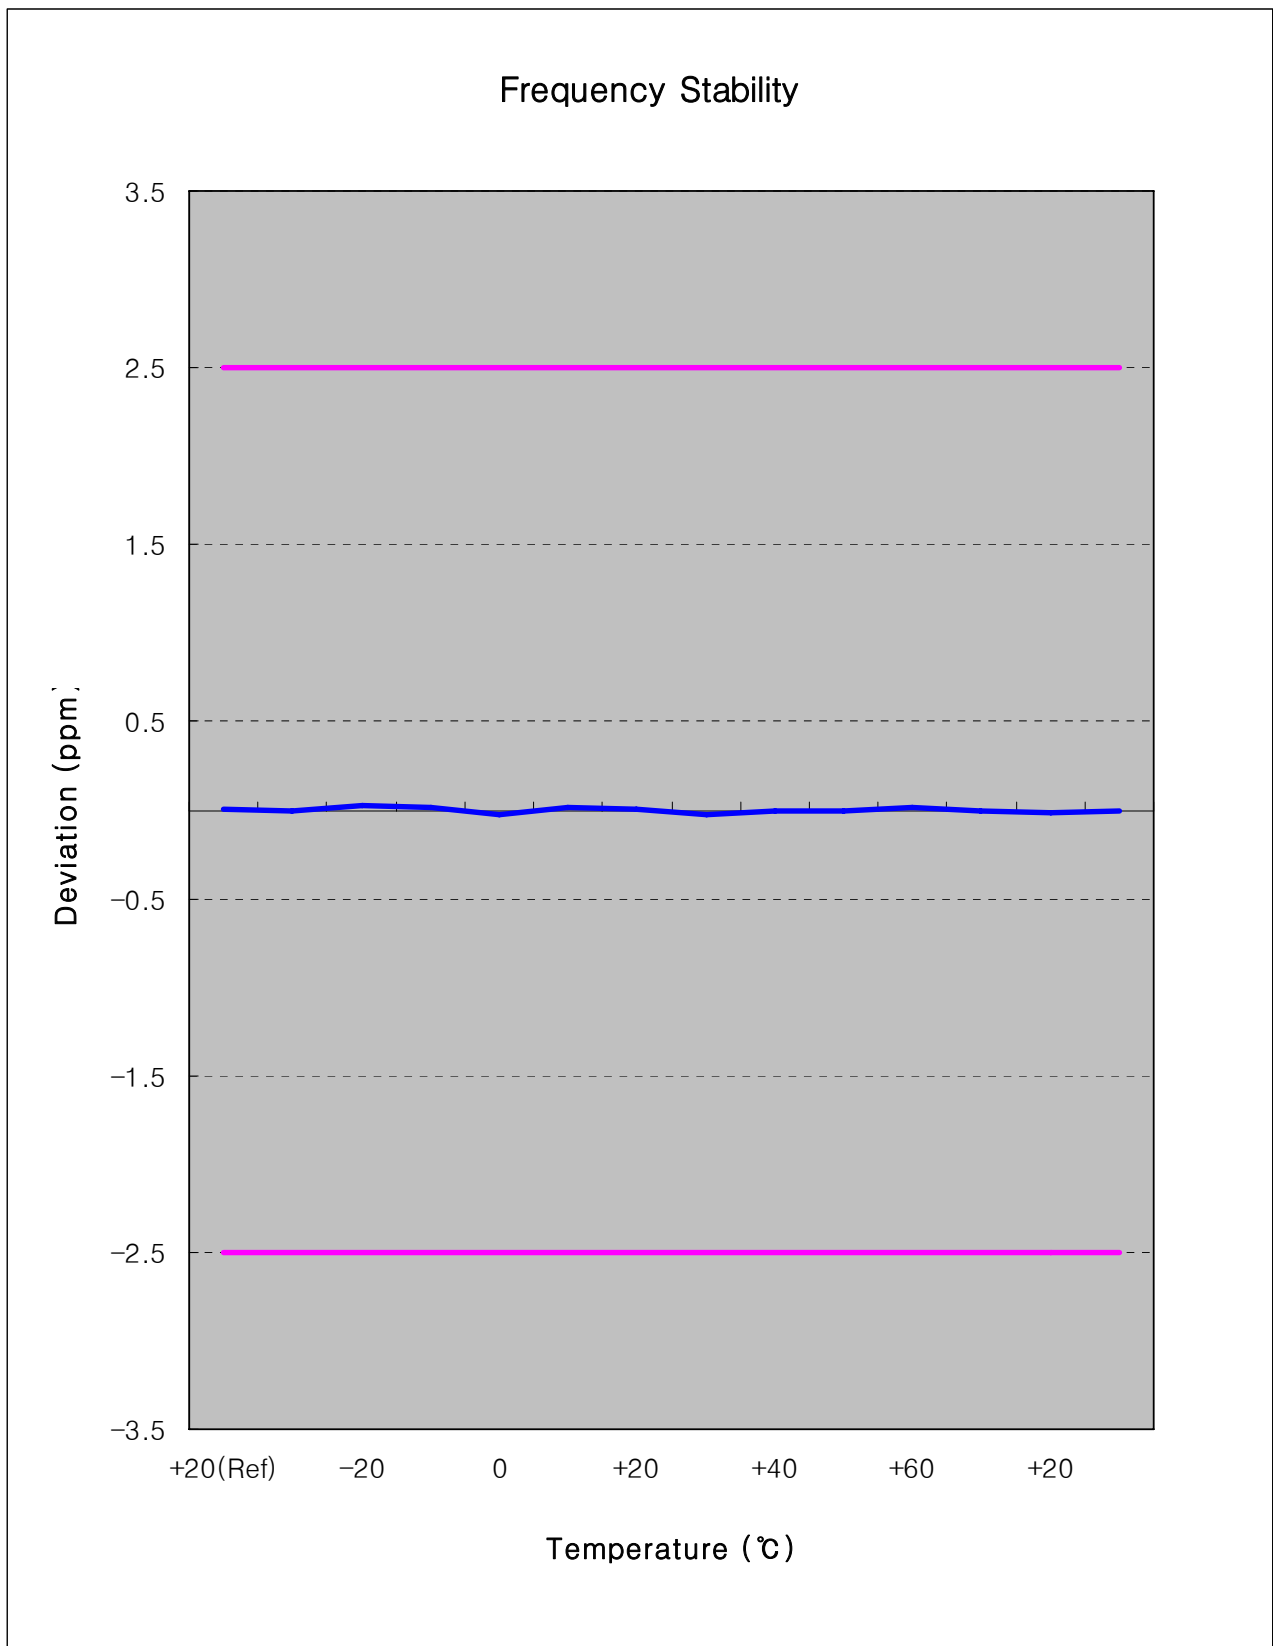


- End of page -

Zoom In

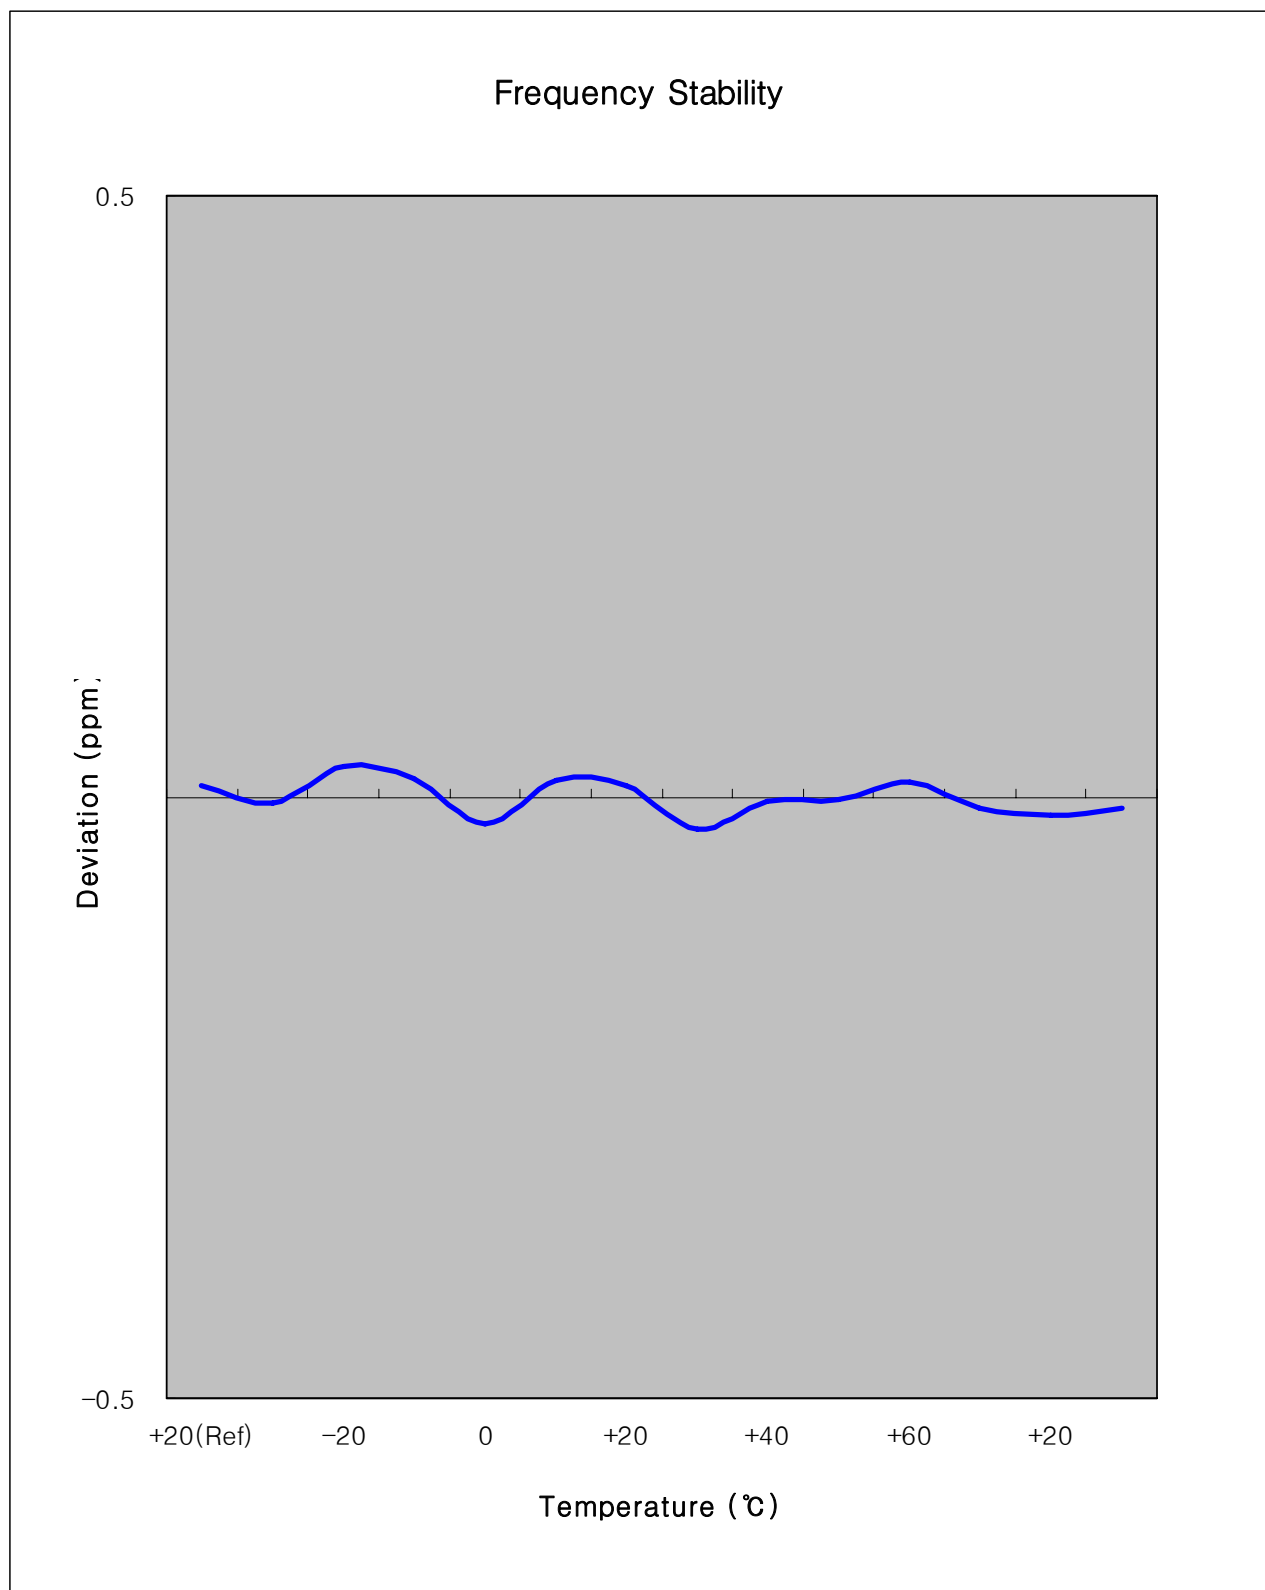


- End of page -

6.7.4 AWS WCDMA Frequency Stability Graph

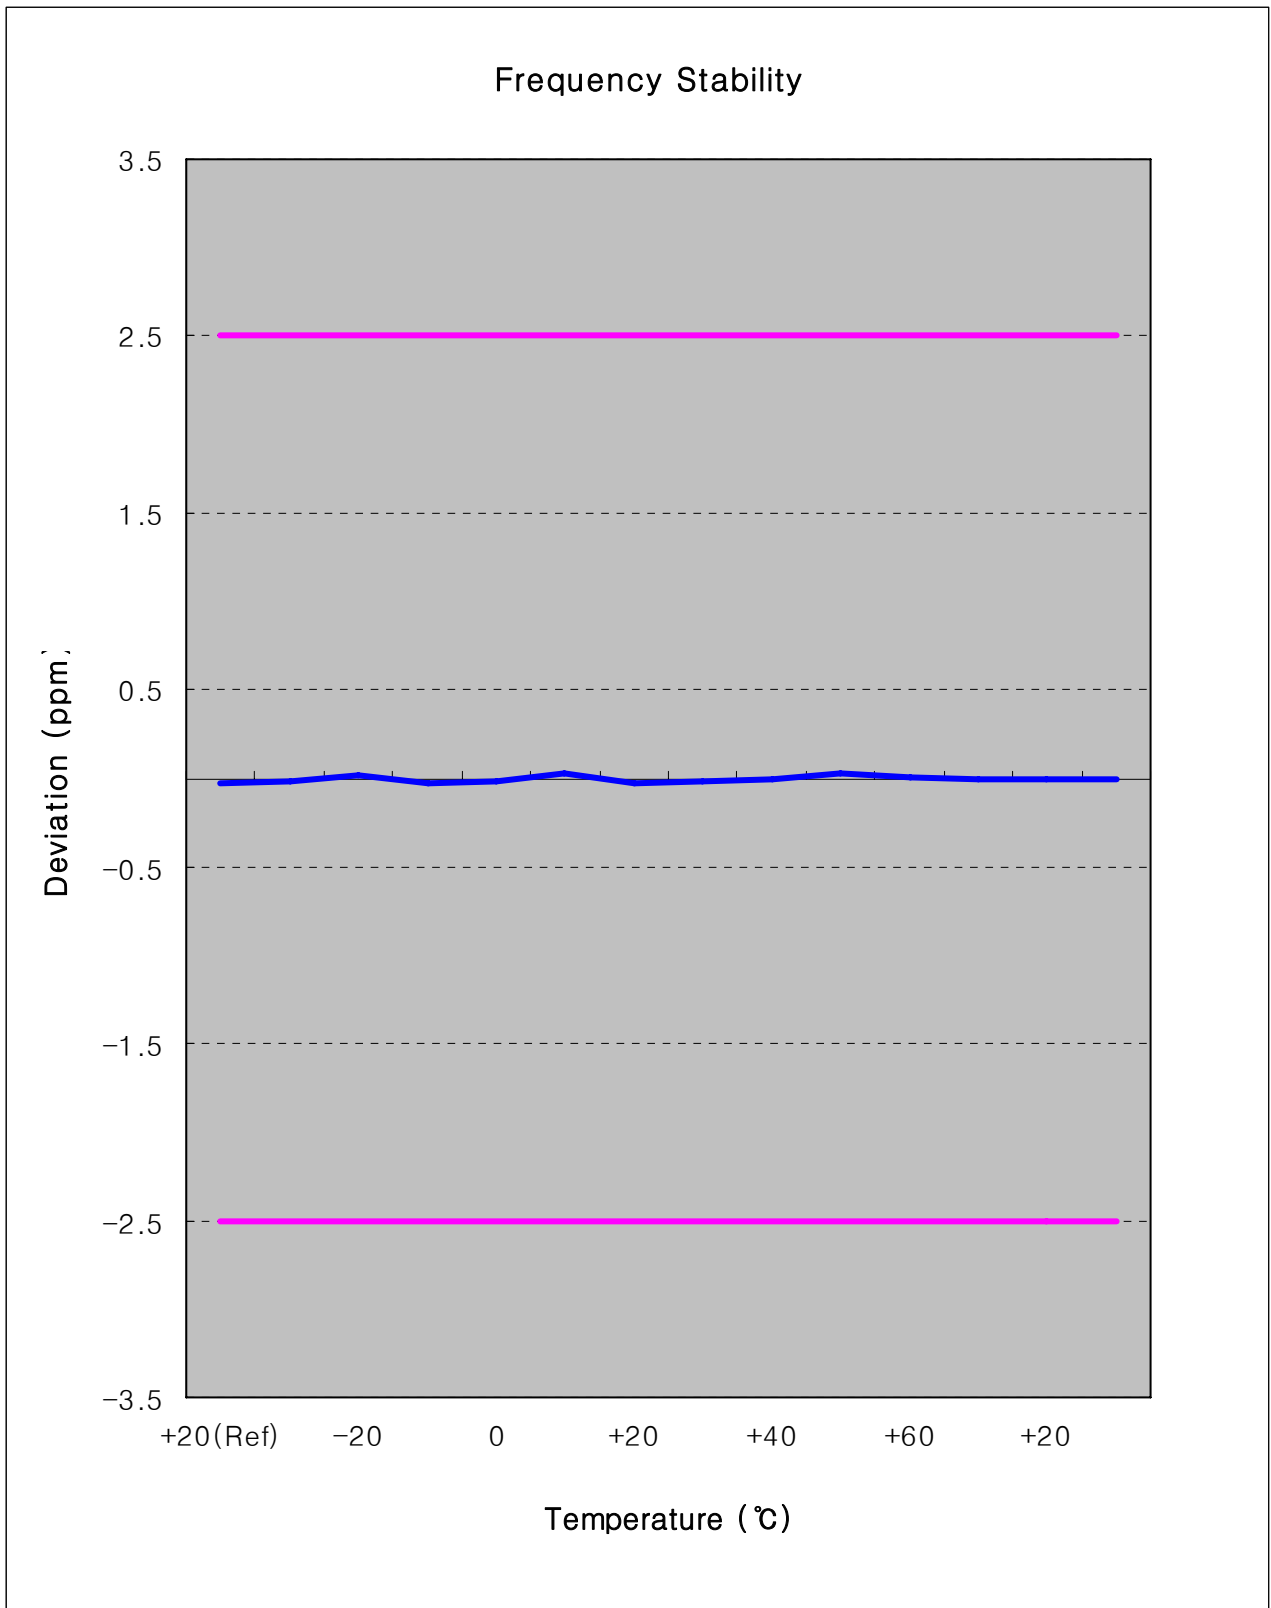

- End of page -

Zoom In

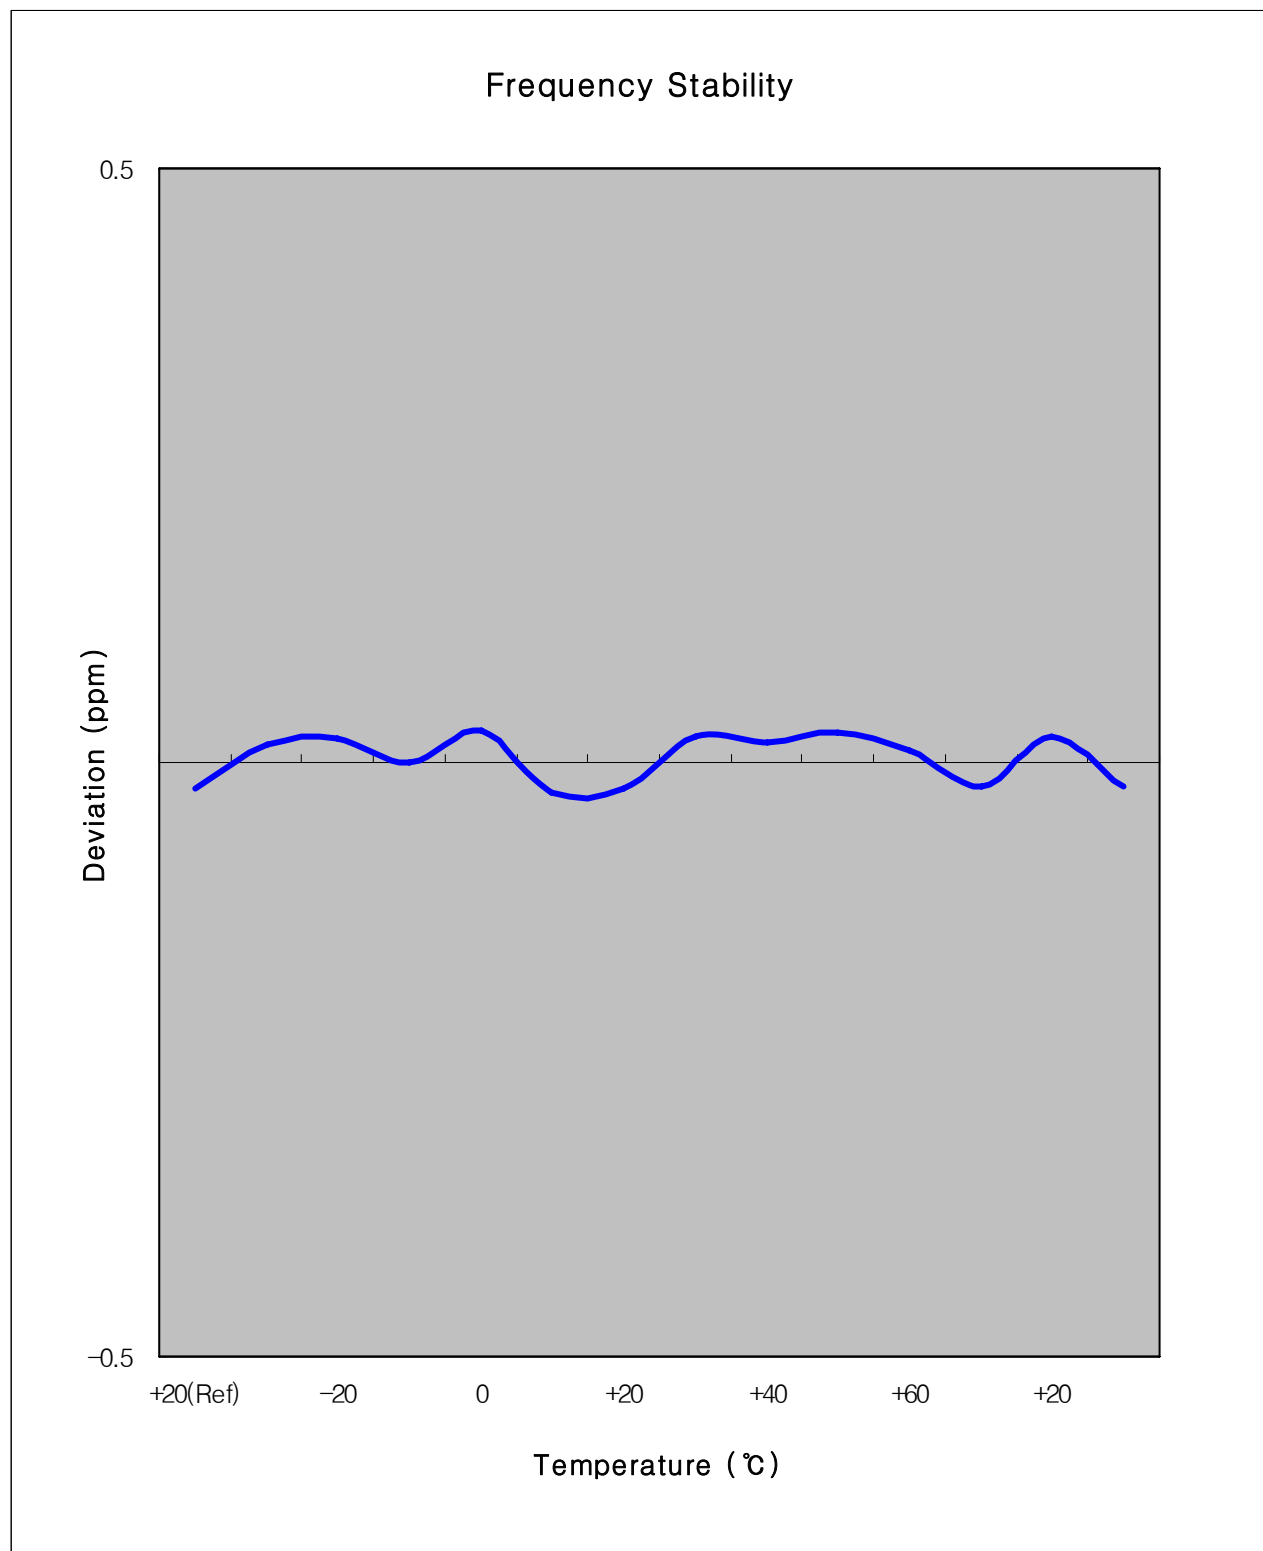

- End of page -

7. SAMPLE CALCULATION

7.1 Emission Designator

Emission Designator = 4M19F9W

CDMA BW = 4.19MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination(Audio/Data)

(Measured at the 99.75% power bandwidth)

– End of page –

8. CONCLUSION

The data collected shows that the SAMSUNG 850/1900 GSM/GPRS/EDGE and AWS/PSC WCDMA/HSPA Phone with Bluetooth and WLAN

FCC ID : A3LSGHT589 complies with all the requirements of Parts 2, 24, 27 of the FCC Rules.

- End of page -

9. TEST PLOTS

A3LSGHT589BAND 2
(UL Channel : 9262, DL Channel : 9662)

Measurement/Instrument Screen													
Control		Waveform Quality								Call Params			
Waveform Quality Setup ▾			Minimum		Maximum		Average		Cell Power				
	EVM (%):		6.34		6.85		6.64		-104.00				
	Frequency Error (Hz):		-28.24		32.97		1.56		dBm/3.84 MHz				
	Origin Offset (dB):		-28.17		-26.86		-27.35		Channel Type				
	Phase Error (°):		2.53		2.81		2.68		12.2k RMC				
	Mag Error (%):		4.53		4.94		4.71						
	Time Error (chips):		0.83		0.97		0.88		Paging Service				
	Max PCDE:		-33.91 dB		at Cch.64.16:0				RB Test Mode				
	50 /5C						Single						
	Thermal Power												
	Thermal Power 21.52 dBm								HSDPA Parameters				
Calibrate Measurements									34.121 Preset Call Configs ▾				
Swap Window Positions													
			Active Cell Connected				Sys Type: UTRA FDD			Channel (UARFCN) Params			
1 of 2					IntRef	Offset	R	T			1 of 3		

(UL Channel : 9400, DL Channel : 9800)

Measurement/Instrument Screen												
Control		Waveform Quality								Call Params		
Waveform Quality Setup ▾					Minimum		Maximum		Average		Cell Power	
	EVM (%):		7.67		10.88		9.18		-104.00			
	Frequency Error (Hz):		-59.66		3.73		-27.59		dBm/3.84 MHz			
	Origin Offset (dB):		-28.01		-26.63		-27.25		Channel Type			
	Phase Error (°):		3.92		5.87		4.87		12.2k RMC			
	Mag Error (%):		3.22		3.70		3.47					
	Time Error (chips):		0.70		0.84		0.74					
	Max PCDE:		-23.00 dB		at Cch.64.16:0						Paging Service	
50 /5C										RB Test Mode		
Calibrate Measurements		Thermal Power										
		Thermal Power								HSDPA Parameters		
		21.12 dBm										
Swap Window Positions										34.121 Preset Call Configs ▾		
										Channel (UARFCN) Params		
				Active Cell Connected				Sys Type: UTRA FDD				
1 of 2				IntRef		Offset		R T		1 of 3		

(UL Channel : 9538, DL Channel : 9938)

Measurement/Instrument Screen												
Control		Waveform Quality							Call Params			
Waveform Quality Setup ▾			Minimum		Maximum		Average			Cell Power		
	EVM (%):		6.40		7.21		6.83			-75.00		
	Frequency Error (Hz):		-40.49		23.48		0.03			dBm/3.84 MHz		
	Origin Offset (dB):		-28.51		-26.84		-27.45			Channel Type		
	Phase Error (°):		2.51		3.00		2.77			12.2k RMC		
	Mag Error (%):		4.67		4.87		4.81					
	Time Error (chips):		0.73		0.87		0.81			Paging Service		
	Max PCDE: -33.28 dB at Cch.64.16:0									RB Test Mode		
	50 / 5C											
							Single					
Calibrate Measurements		Thermal Power										
		Thermal Power										
		21.18 dBm										
Swap Window Positions												
		Single										
		Active Cell Connected				Sys Type: UTRA FDD						
1 of 2						IntRef Offset R T				1 of 3		

(UL Channel : 9262, DL Channel : 9662)


Agilent

Base

Ch Freq

1.8524 GHz

Trig Free

Occupied Bandwidth

#3GPP W-CDMA

FCC ID:A3LSGHT589 0BW Ch.9662

Ref 25 dBm Atten 30 dB

#Samp

Log


10

dB/

Offset

8.75

dB

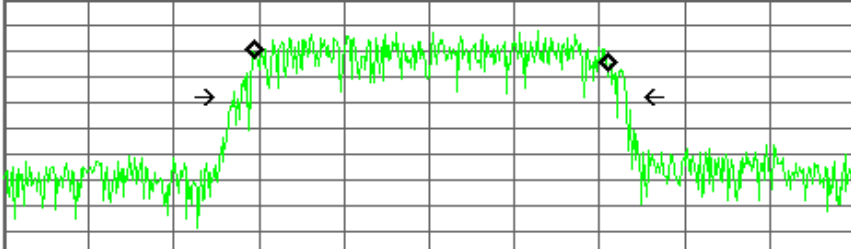

Center 1.852 40 GHz

Span 10 MHz

#Res BW 100 kHz

#VBW 1 MHz

Sweep 2.92 ms (601 pts)

Occupied Bandwidth

4.1770 MHz

Occ BW % Pwr

99.00 %

x dB

-26.00 dB

Transmit Freq Error

18.735 kHz

x dB Bandwidth

4.626 MHz*

File Operation Status, C:\TEMP.GIF file saved

Freq/Channel

Center Freq

1.85240000 GHz

Start Freq

1.84740000 GHz

Stop Freq

1.85740000 GHz

CF Step

1.00000000 MHz

Auto

Man

Freq Offset


0.00000000 Hz

Signal Track


On

Off


(UL Channel : 9400, DL Channel : 9800)

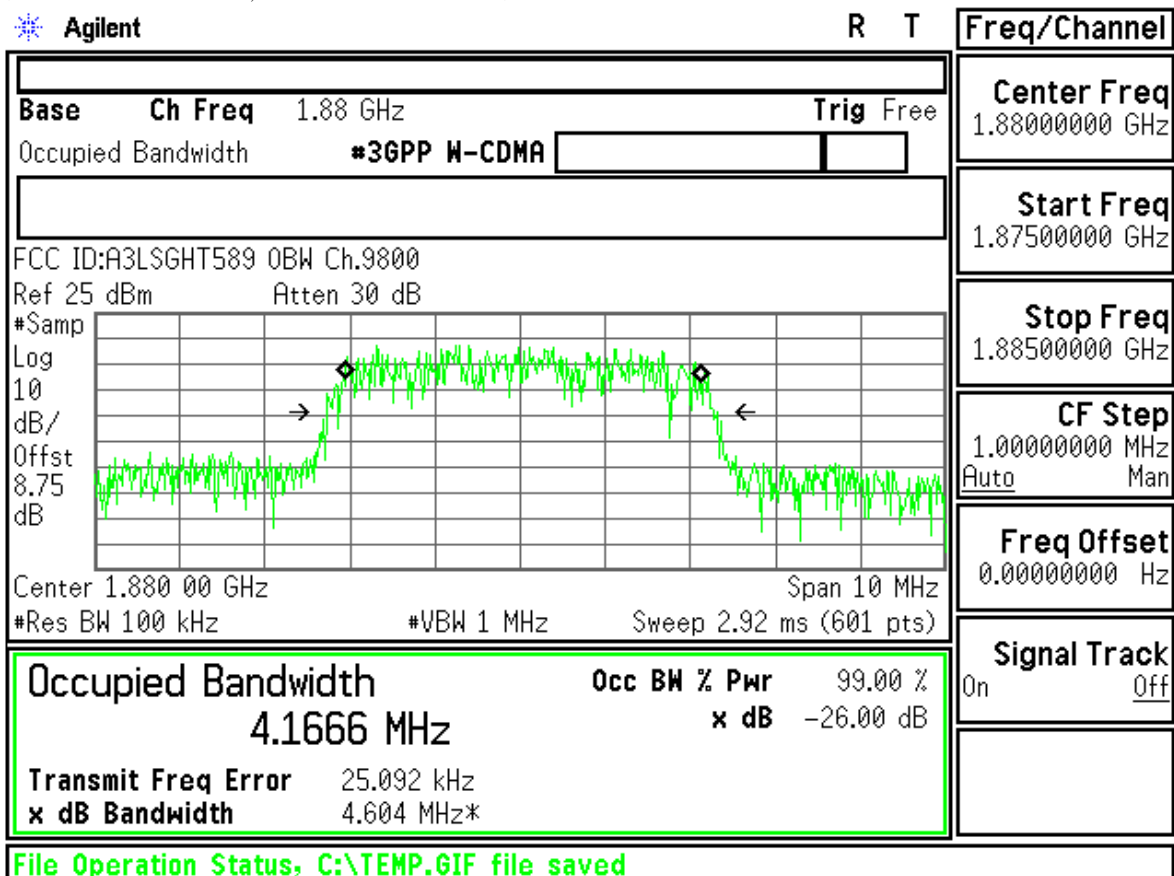


(UL Channel : 9538, DL Channel : 9938)

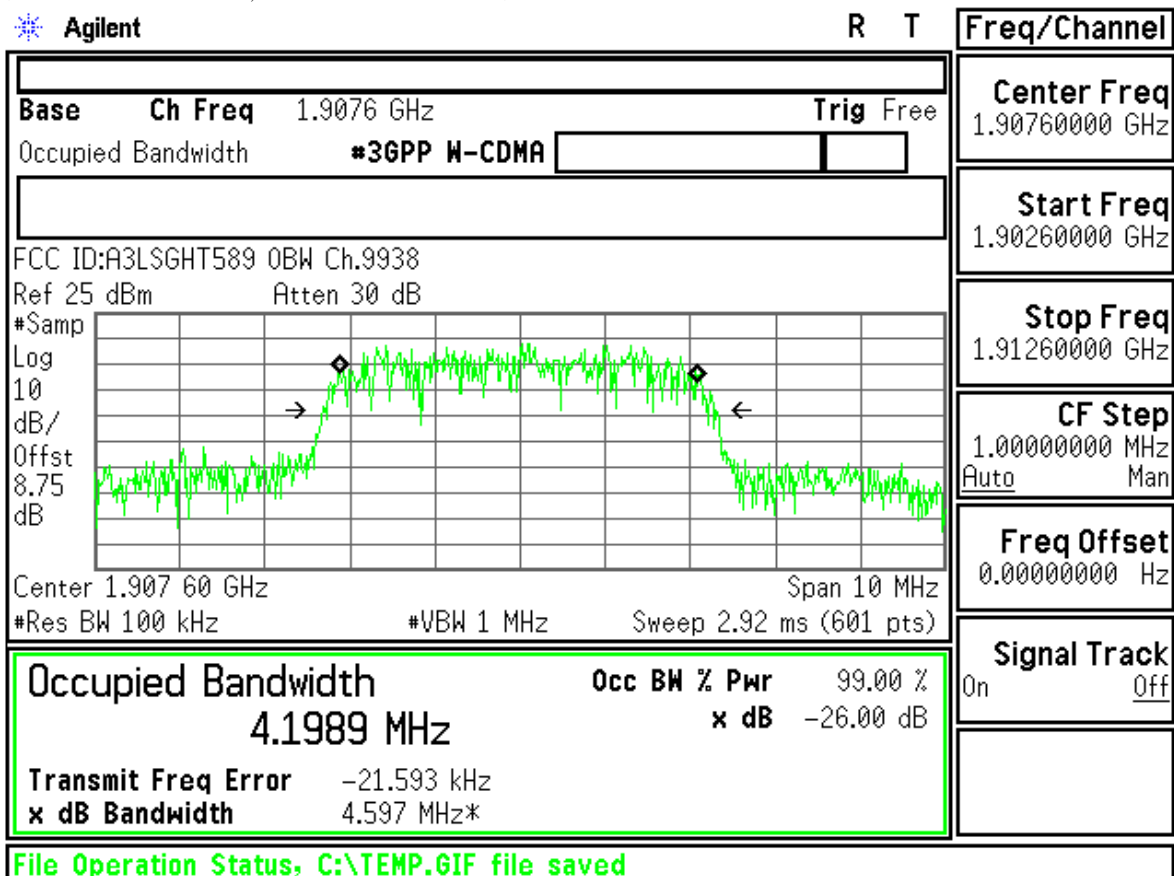


(UL Channel : 9262, DL Channel : 9662)

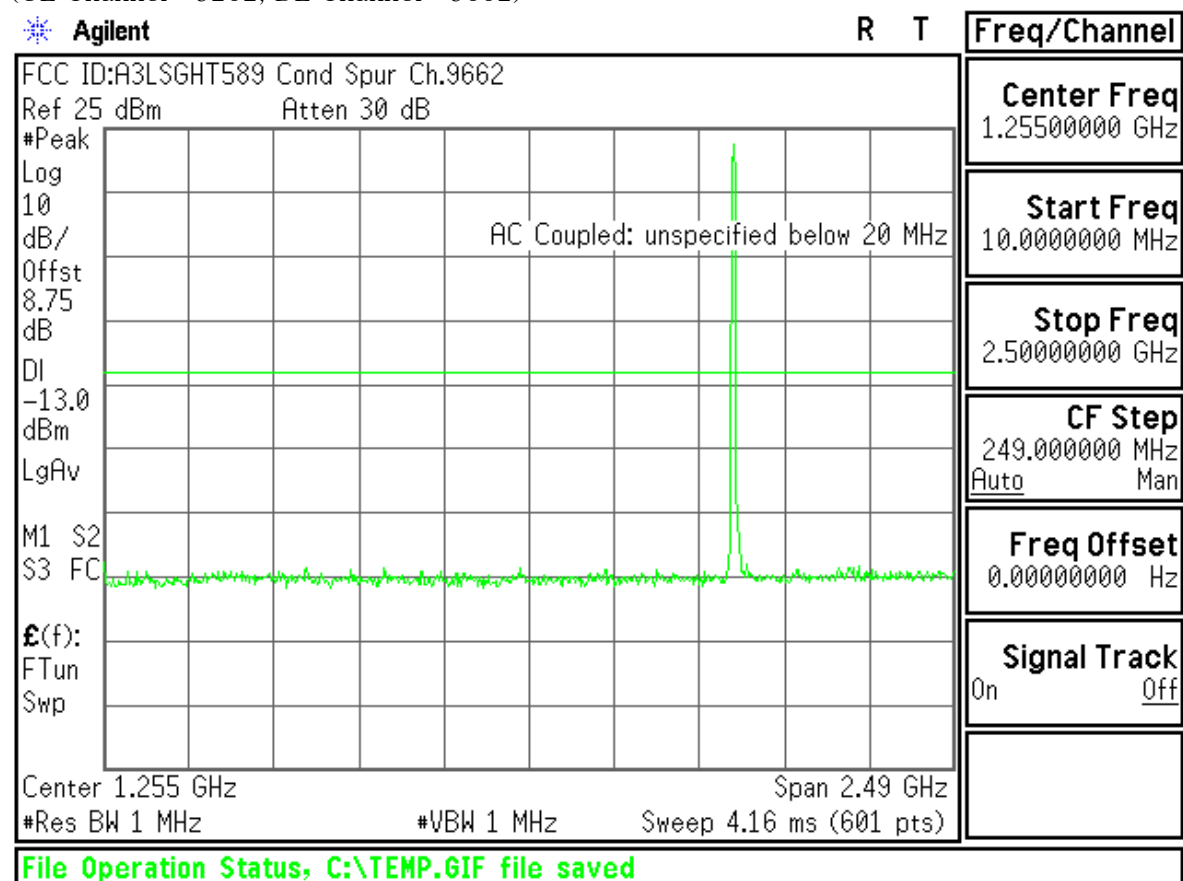


(UL Channel : 9262, DL Channel : 9662)

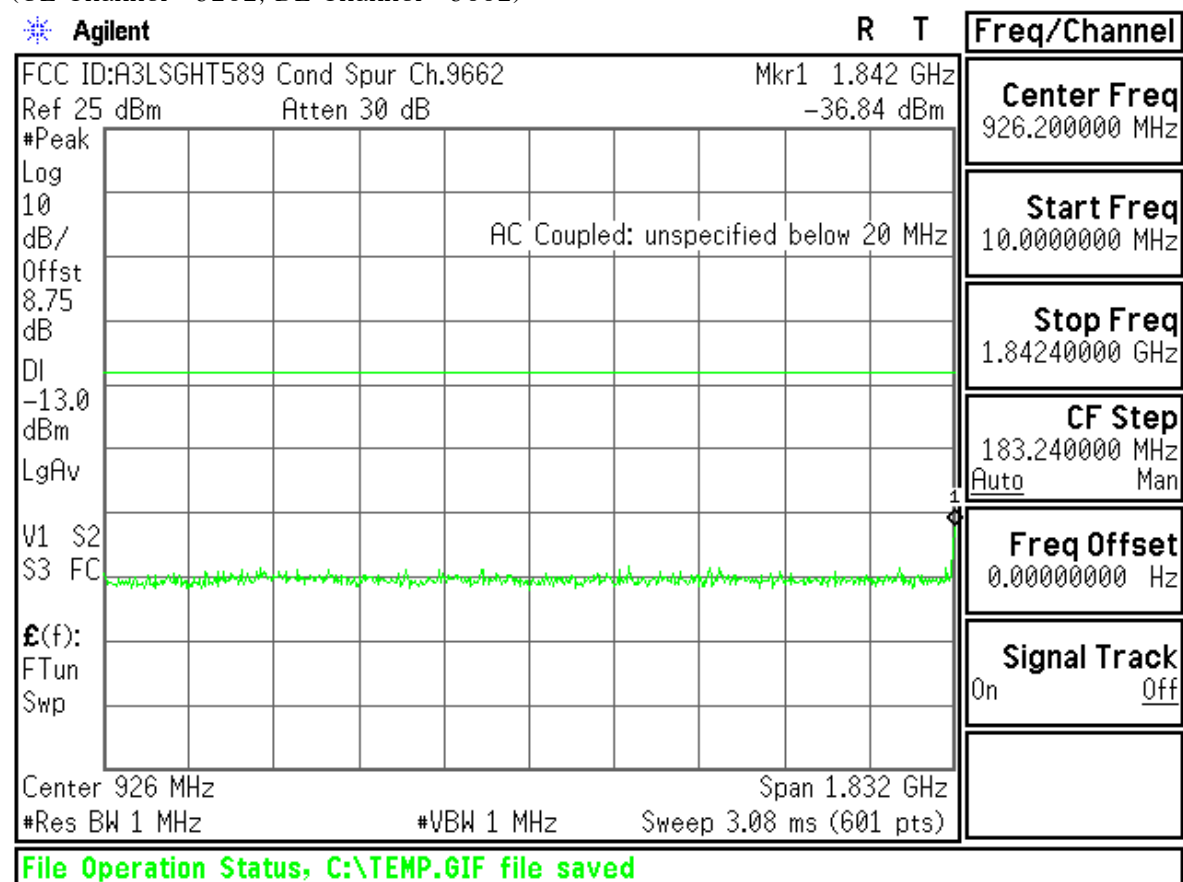


(UL Channel : 9262, DL Channel : 9662)

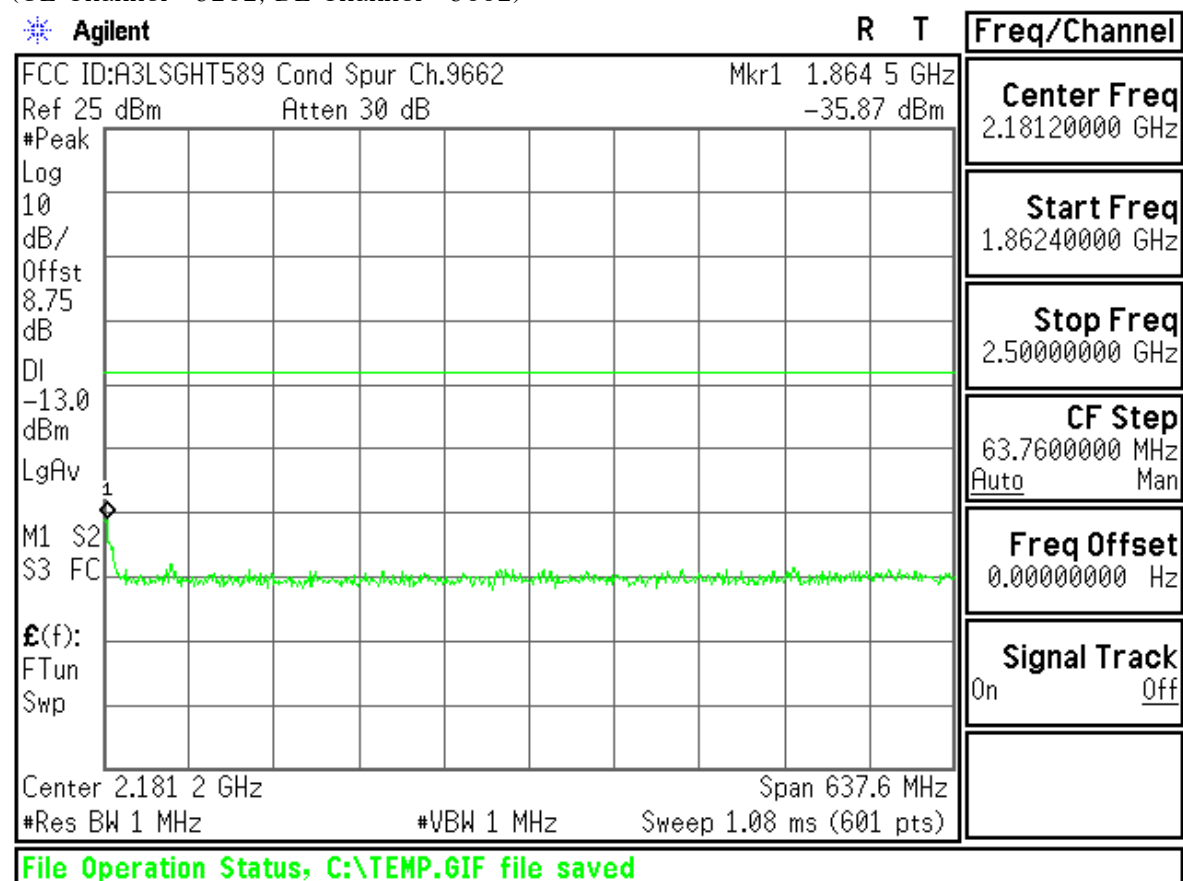


(UL Channel : 9262, DL Channel : 9662)

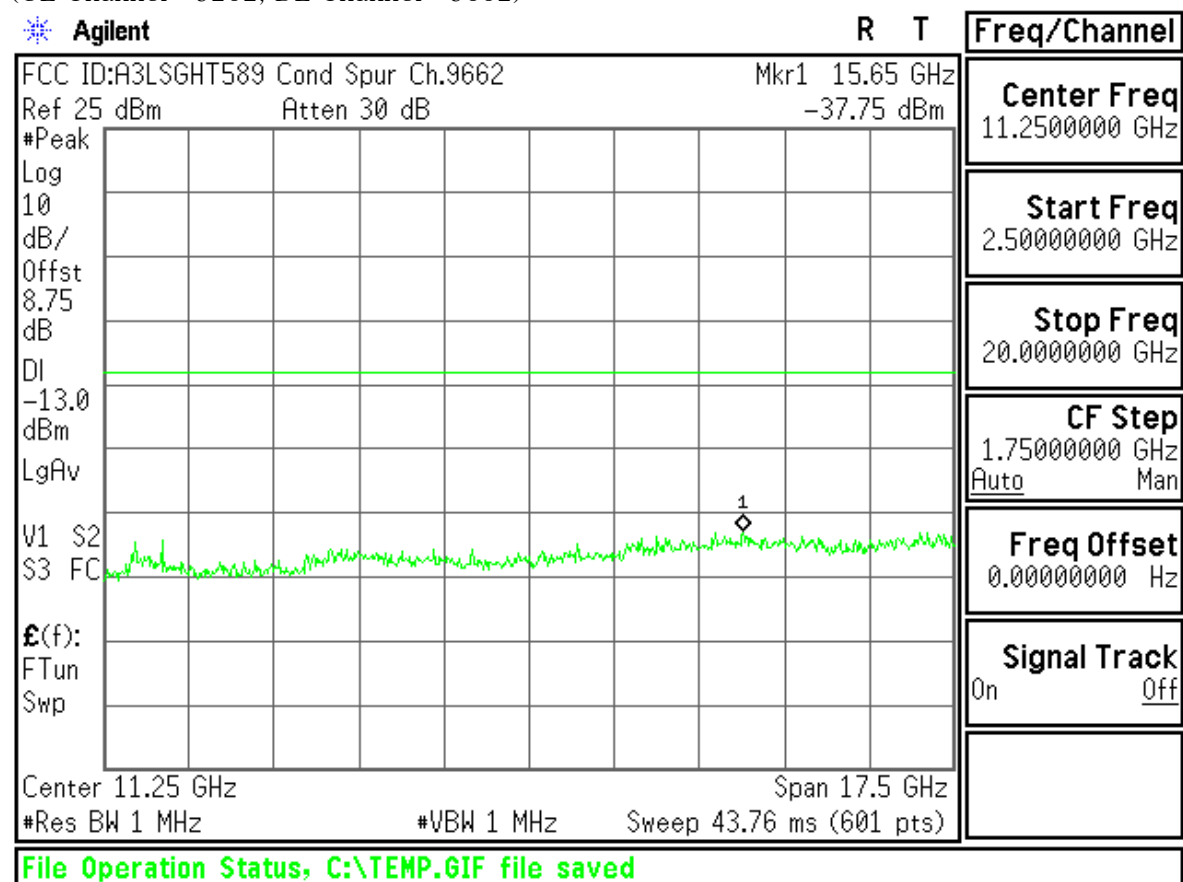


(UL Channel : 9400, DL Channel : 9800)

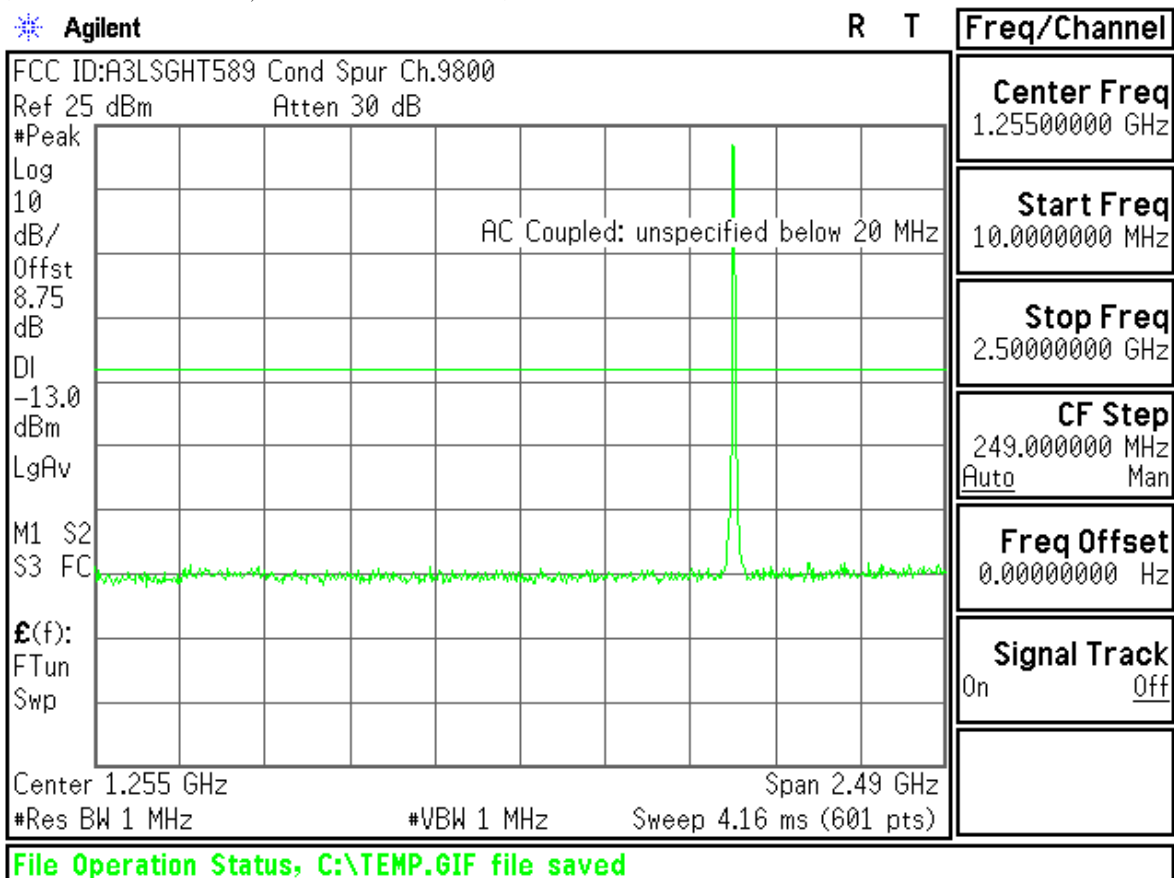


(UL Channel : 9400, DL Channel : 9800)

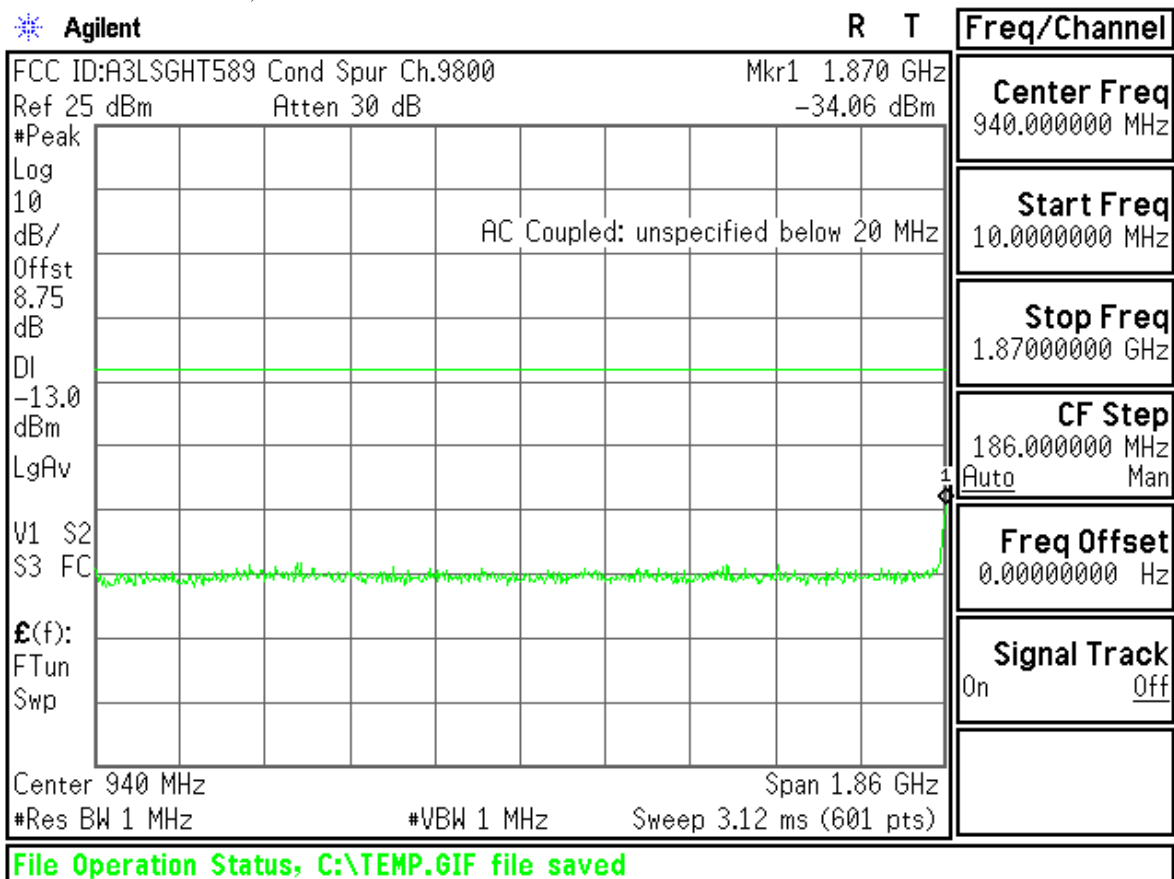


(UL Channel : 9400, DL Channel : 9800)

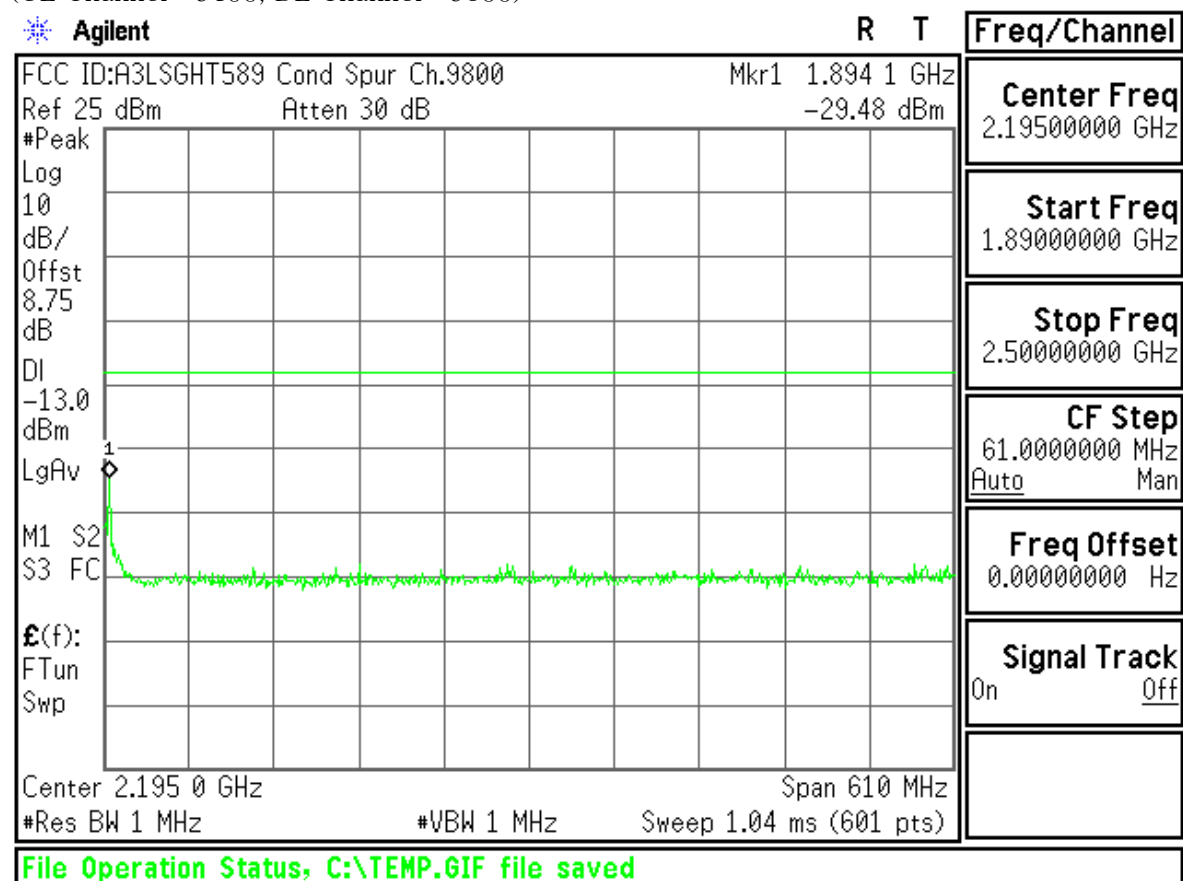


(UL Channel : 9400, DL Channel : 9800)

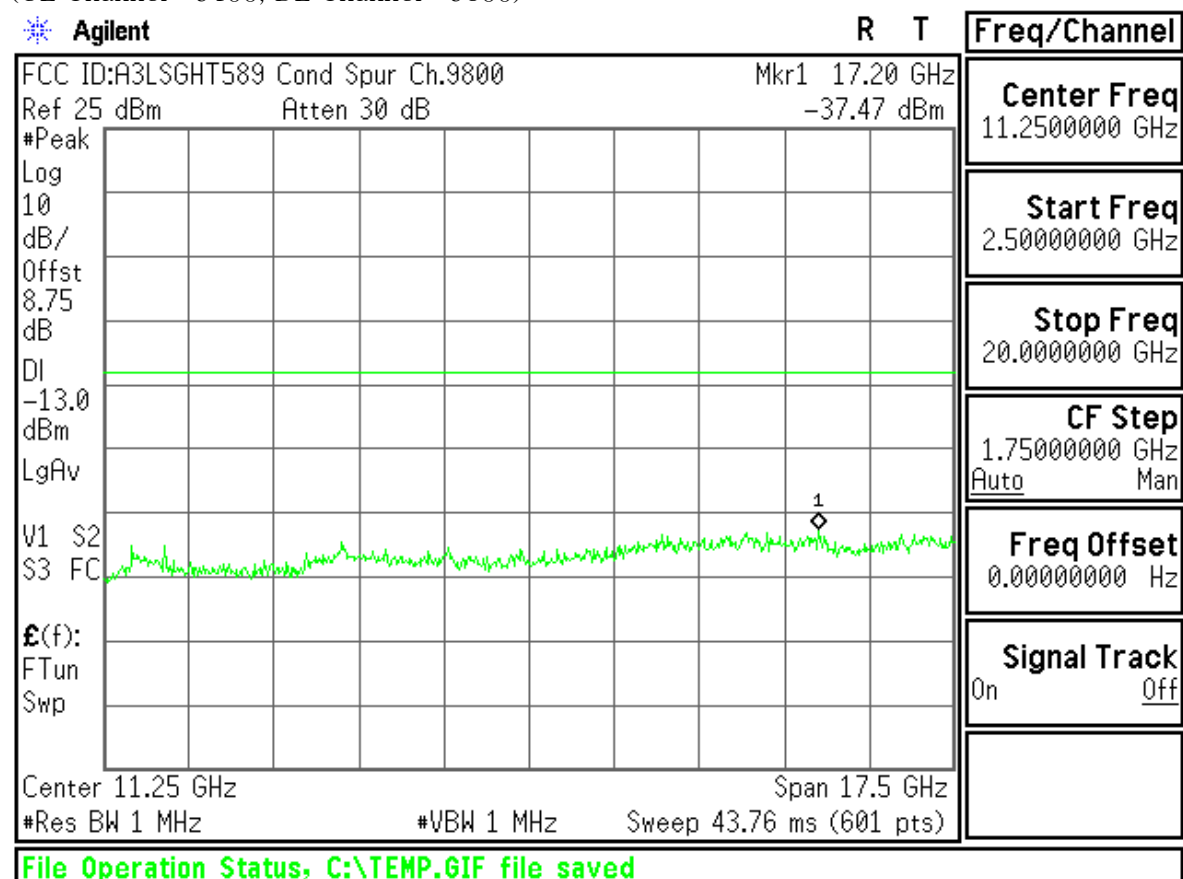


(UL Channel : 9538, DL Channel : 9938)

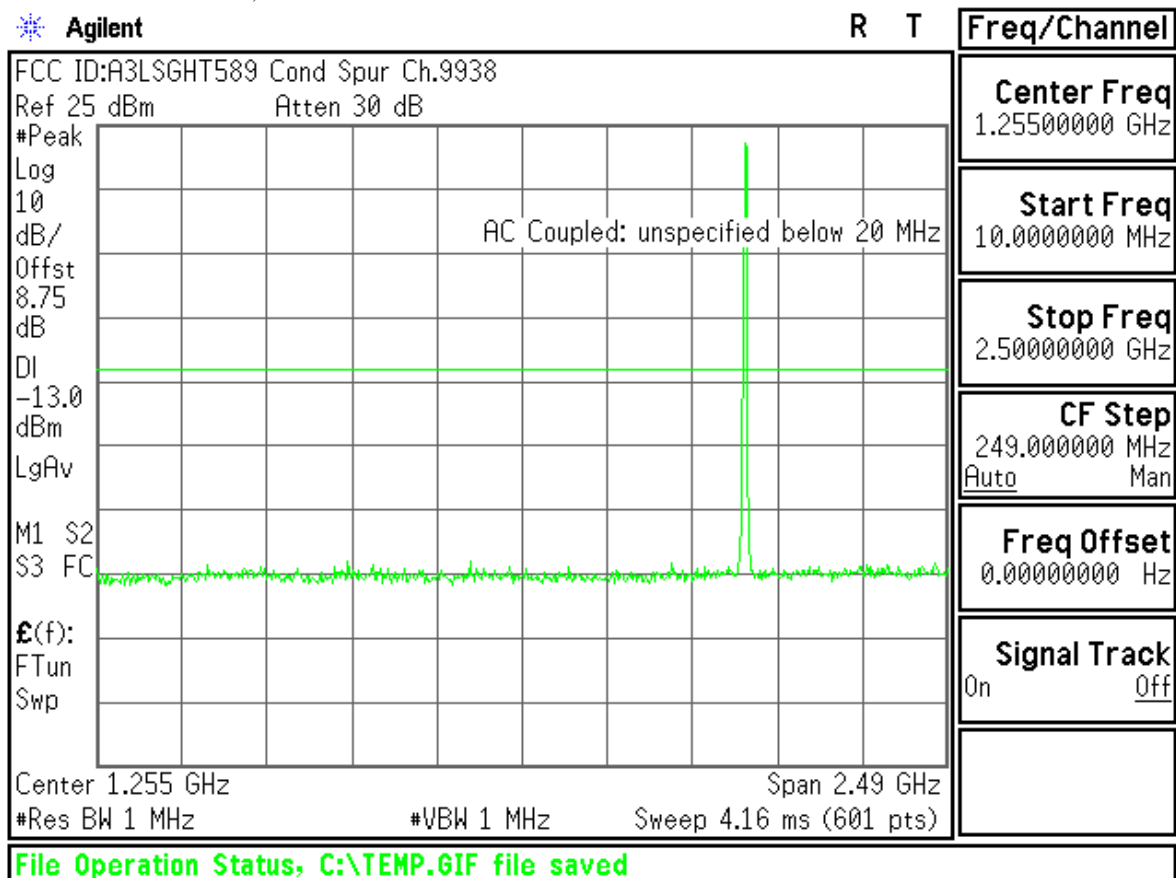


(UL Channel : 9538, DL Channel : 9938)

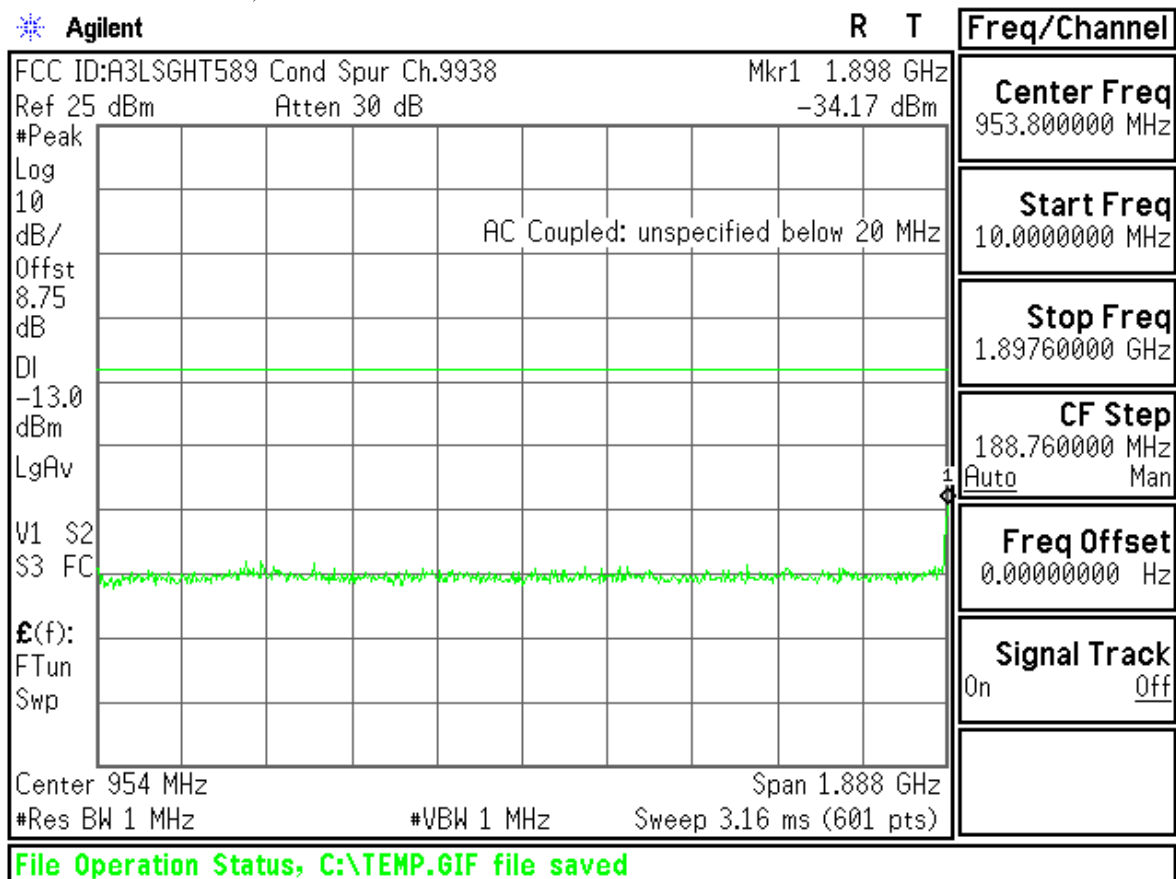


(UL Channel : 9538, DL Channel : 9938)

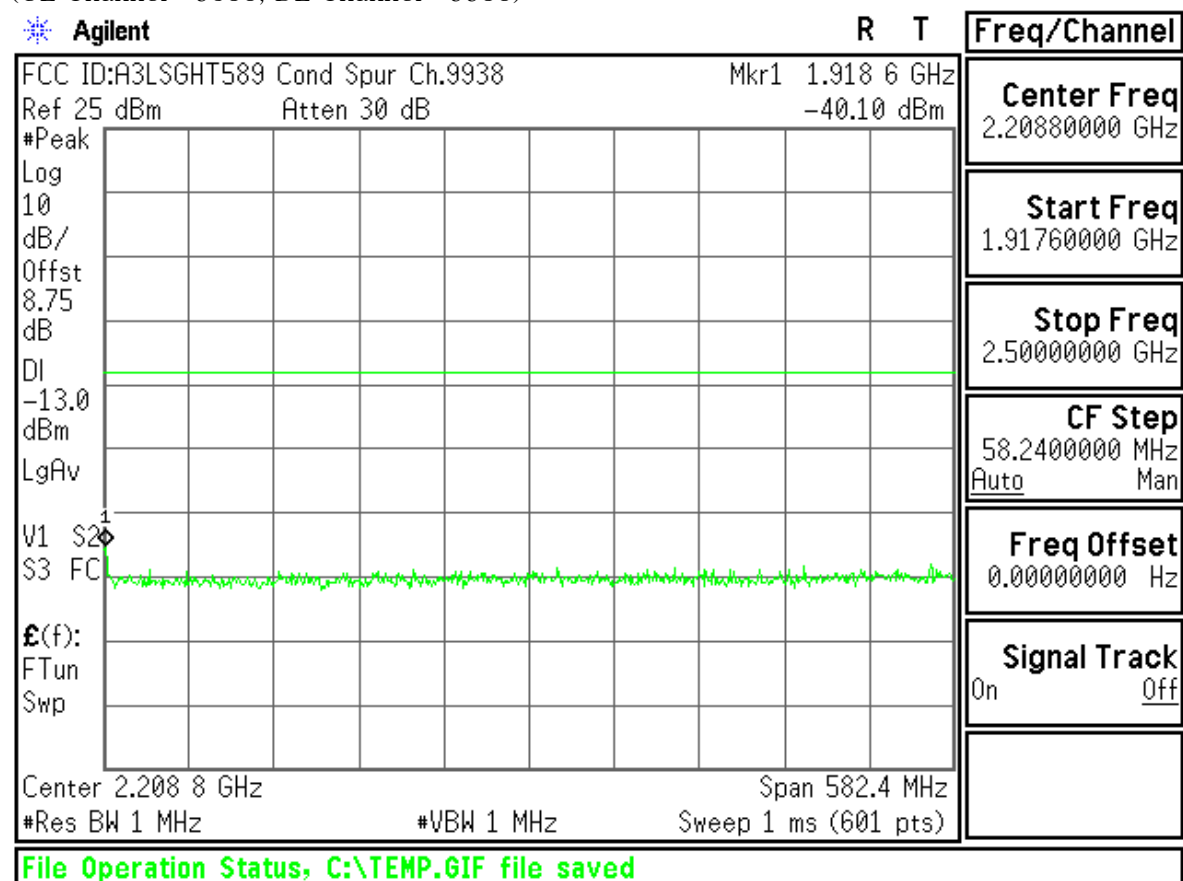


(UL Channel : 9538, DL Channel : 9938)

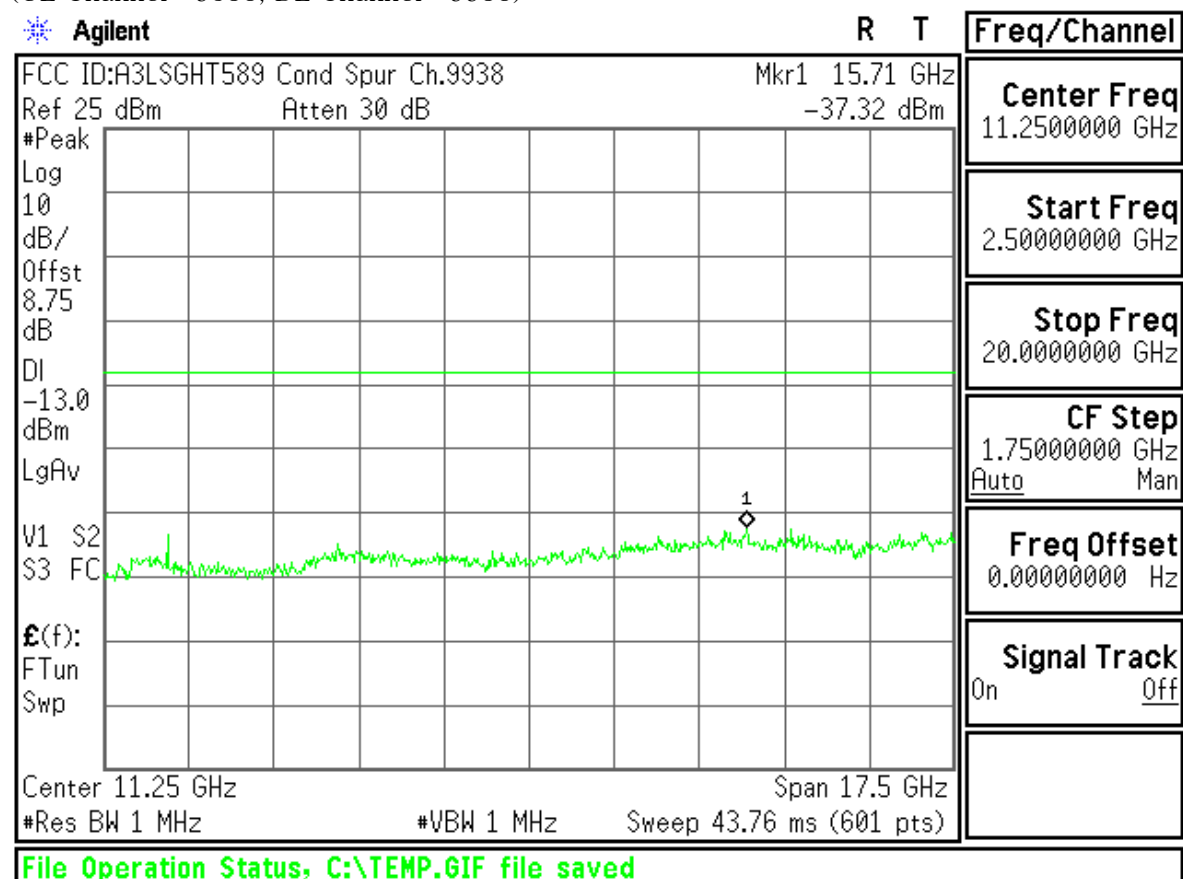


(UL Channel : 9262, DL Channel : 9662)

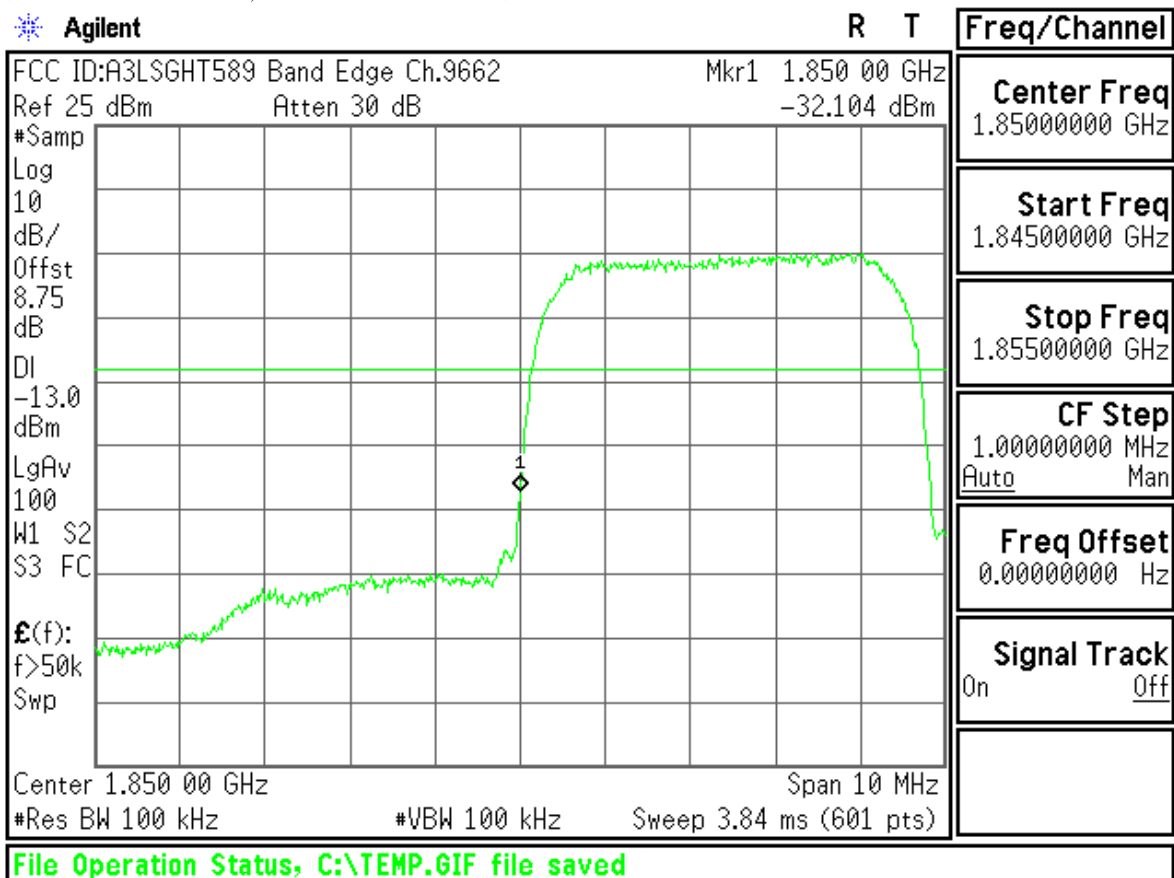


(UL Channel : 9538, DL Channel : 9938)

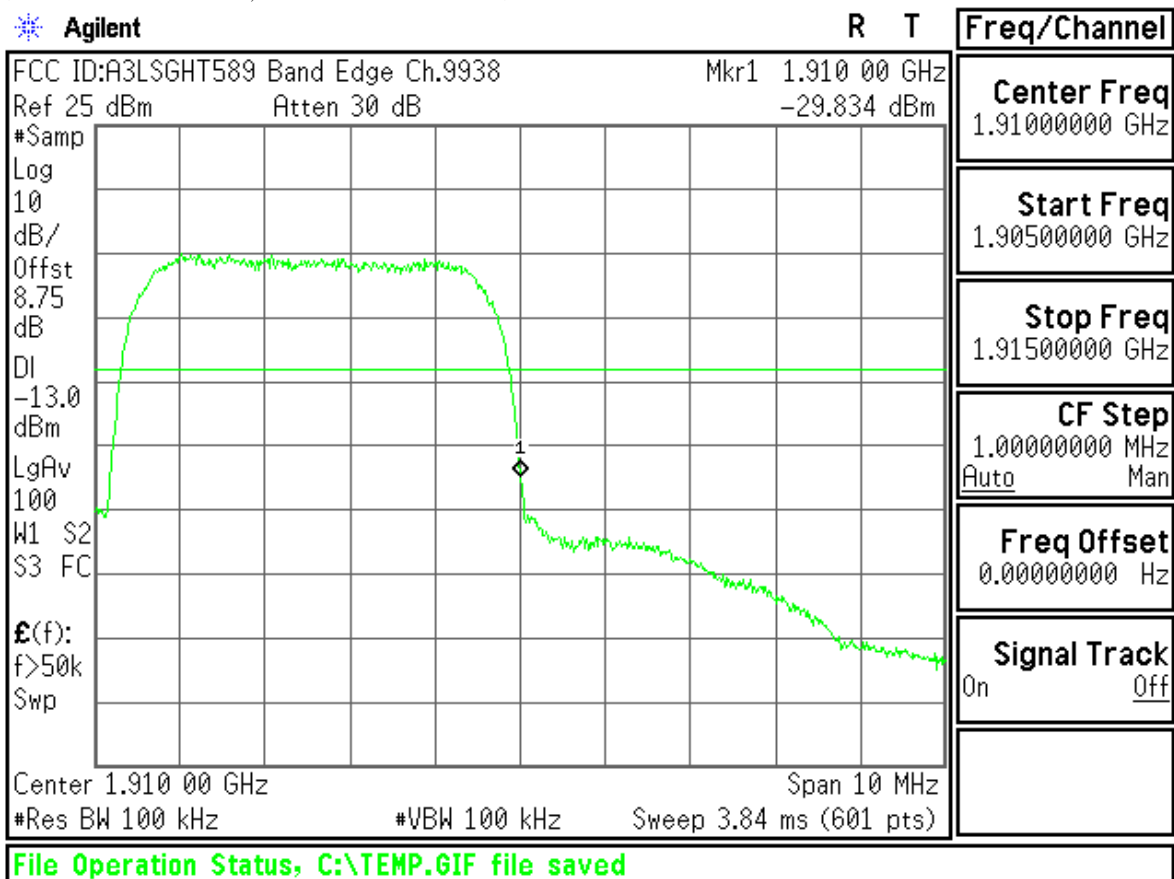

(UL Channel : 9262, DL Channel : 9662)

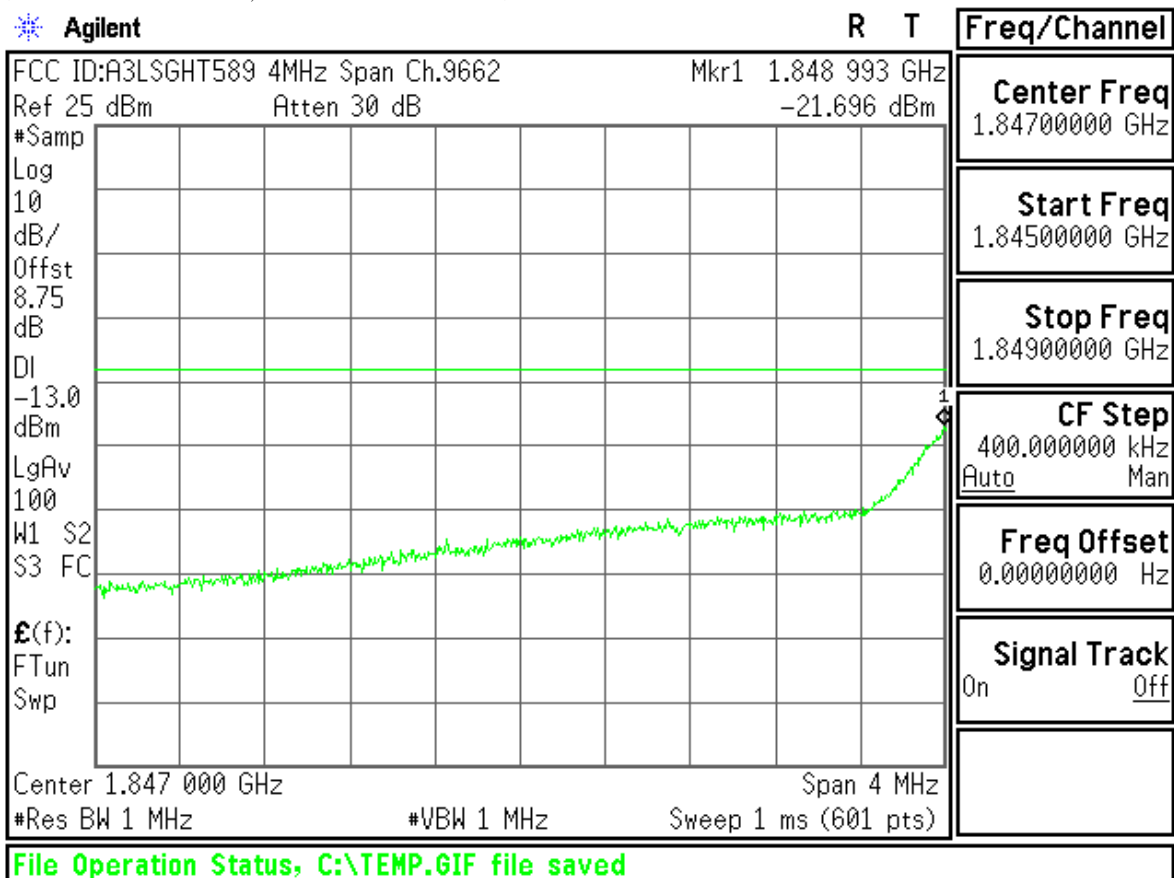


(UL Channel : 9538, DL Channel : 9938)

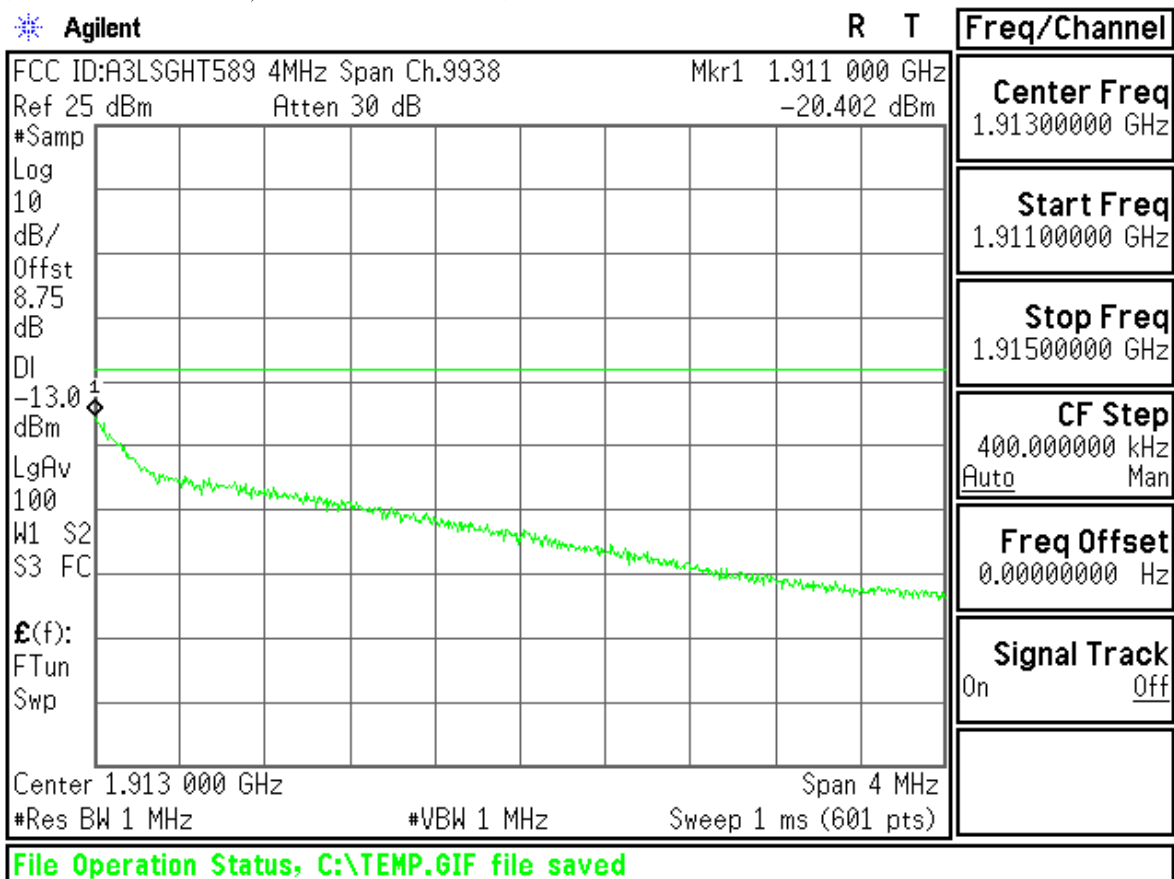

(UL Channel : 9400, DL Channel : 9800)

Agilent

R T

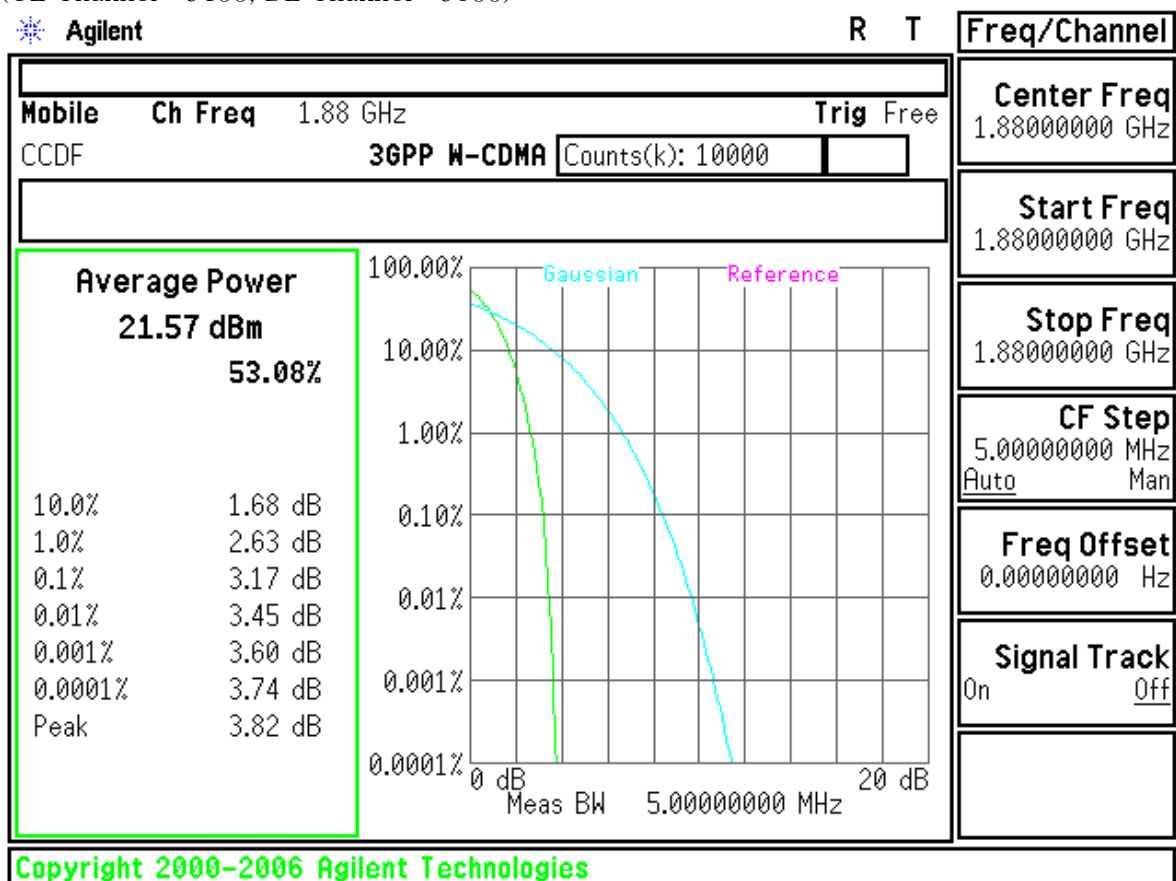

A3LSGHT589BAND 4
(UL Channel : 1312, DL Channel : 1537)

Measurement/Instrument Screen													
Control		Waveform Quality								Call Parms			
Waveform Quality Setup ▾			Minimum		Maximum		Average		Cell Power				
	EVM (%):		6.74		9.45		8.15		-104.00				
	Frequency Error (Hz):		-57.92		21.65		-23.58		dBm/3.84 MHz				
	Origin Offset (dB):		-28.70		-27.20		-27.84		Channel Type				
	Phase Error (°):		3.37		5.06		4.26		12.2k RMC				
	Mag Error (%):		3.14		3.43		3.33		Paging Service				
	Time Error (chips):		0.51		0.65		0.60						
Max PCDE:		-23.87 dB		at Cch.64.16:0				50 /5C		Single		RB Test Mode	
Calibrate Measurements		Thermal Power								HSDPA Parameters			
Swap Window Positions		Thermal Power 22.32 dBm								34.121 Preset Call Configs ▾			
		Single								Channel (UARFCN) Parms			
				Active Cell Connected				Sys Type: UTRA FDD					
1 of 2						IntRef		Offset		R T			
												1 of 3	

(UL Channel : 1412, DL Channel : 1637)

Measurement/Instrument Screen													
Control		Waveform Quality								Call Parms			
Waveform Quality Setup ▾			Minimum		Maximum		Average		Cell Power				
	EVM (%):		6.55		9.33		7.99		-104.00				
	Frequency Error (Hz):		-71.35		3.43		-31.02		dBm/3.84 MHz				
	Origin Offset (dB):		-28.95		-26.97		-27.77		Channel Type				
	Phase Error (°):		3.41		5.05		4.24		12.2k RMC				
	Mag Error (%):		2.76		3.26		3.03		Paging Service				
Time Error (chips):		0.46		0.69		0.58							
		Max PCDE: -23.88 dB at Cch.64.16:0								RB Test Mode			
		50 /5C								Single			
Calibrate Measurements		Thermal Power											
		Thermal Power											
		22.00 dBm											
Swap Window Positions		Single											
						Active Cell Connected				Sys Type: UTRA FDD			
1 of 2						IntRef		Offset		R T		1 of 3	

(UL Channel : 1862, DL Channel : 2087)

Measurement/Instrument Screen										
Control		Waveform Quality							Call Parms	
Waveform Quality Setup ▾			Minimum		Maximum		Average		Cell Power	
	EVM (%):		4.71		5.61		5.19		-75.00	
	Frequency Error (Hz):		-20.12		23.38		-1.00		dBm/3.84 MHz	
	Origin Offset (dB):		-27.99		-25.89		-26.69		Channel Type	
	Phase Error (°):		2.13		2.44		2.27		12.2k RMC	
	Mag Error (%):		2.88		3.63		3.34		Paging Service	
	Time Error (chips):		0.58		0.71		0.63		RB Test Mode	
	Max PCDE: -34.20 dB at Cch.64.16:0									
50 / 5C								Single		
Calibrate Measurements		Thermal Power								
		Thermal Power								
		21.85 dBm								
Swap Window Positions		Single								
		Active Cell Connected				Sys Type: UTRA FDD				
1 of 2						IntRef Offset R T			1 of 3	

(UL Channel : 1312, DL Channel : 1537)

Agilent

R T

Freq/Channel

Base Ch Freq 1.7125 GHz

Occupied Bandwidth #3GPP W-CDMA

Trig Free

FCC ID:A3LSGHT589 0BW Ch.1537

Ref 25 dBm Atten 30 dB

#Samp Log 10 dB/ Offst 8.78 dB

Center 1.712 50 GHz Span 10 MHz

#Res BW 100 kHz #VBW 1 MHz Sweep 2.92 ms (601 pts)

Occupied Bandwidth 4.1335 MHz

Occ BW % Pwr 99.00 %

x dB -26.00 dB

Transmit Freq Error -116.566 kHz

x dB Bandwidth 4.585 MHz*

File Operation Status, C:\TEMP.GIF file saved

Center Freq 1.71250000 GHz

Start Freq 1.70750000 GHz

Stop Freq 1.71750000 GHz


CF Step 1.00000000 MHz

Auto Man


Freq Offset 0.00000000 Hz

Signal Track On Off


(UL Channel : 1412, DL Channel : 1637)

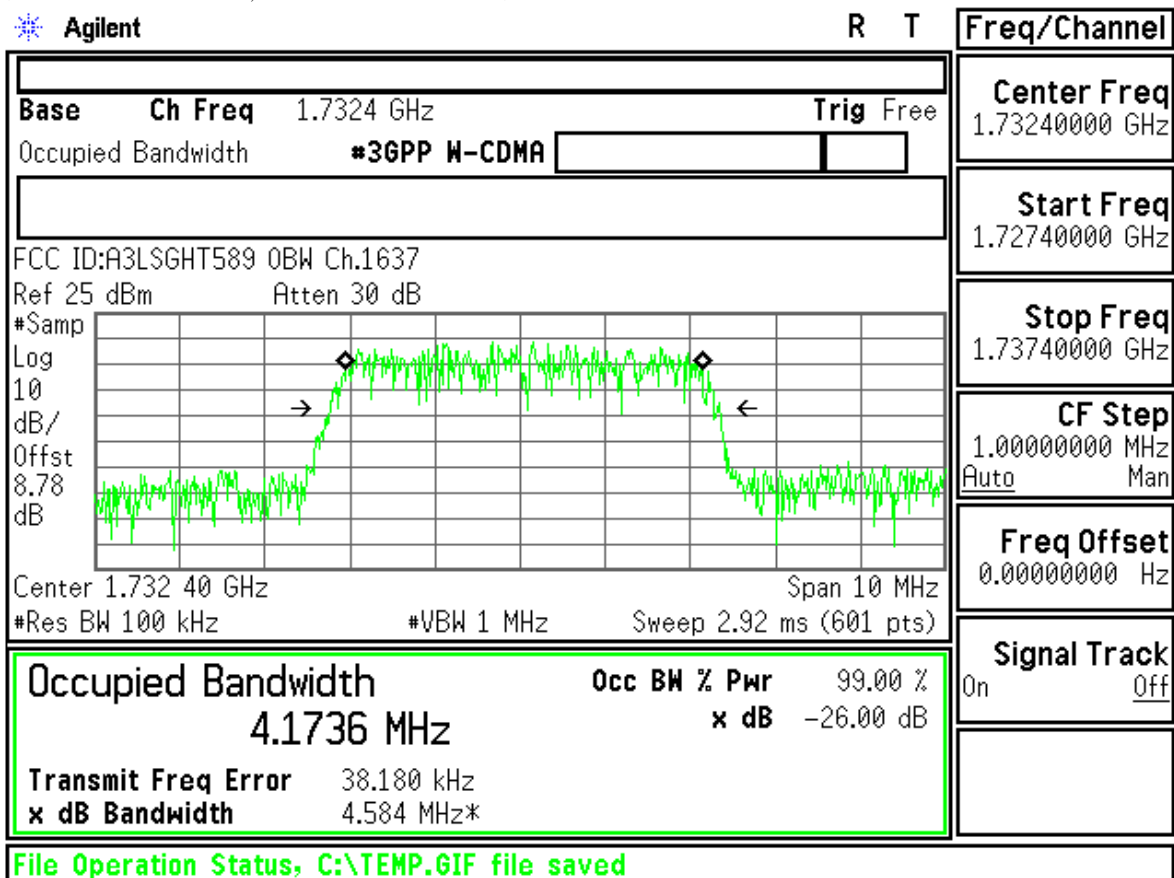


(UL Channel : 1862, DL Channel : 2087)

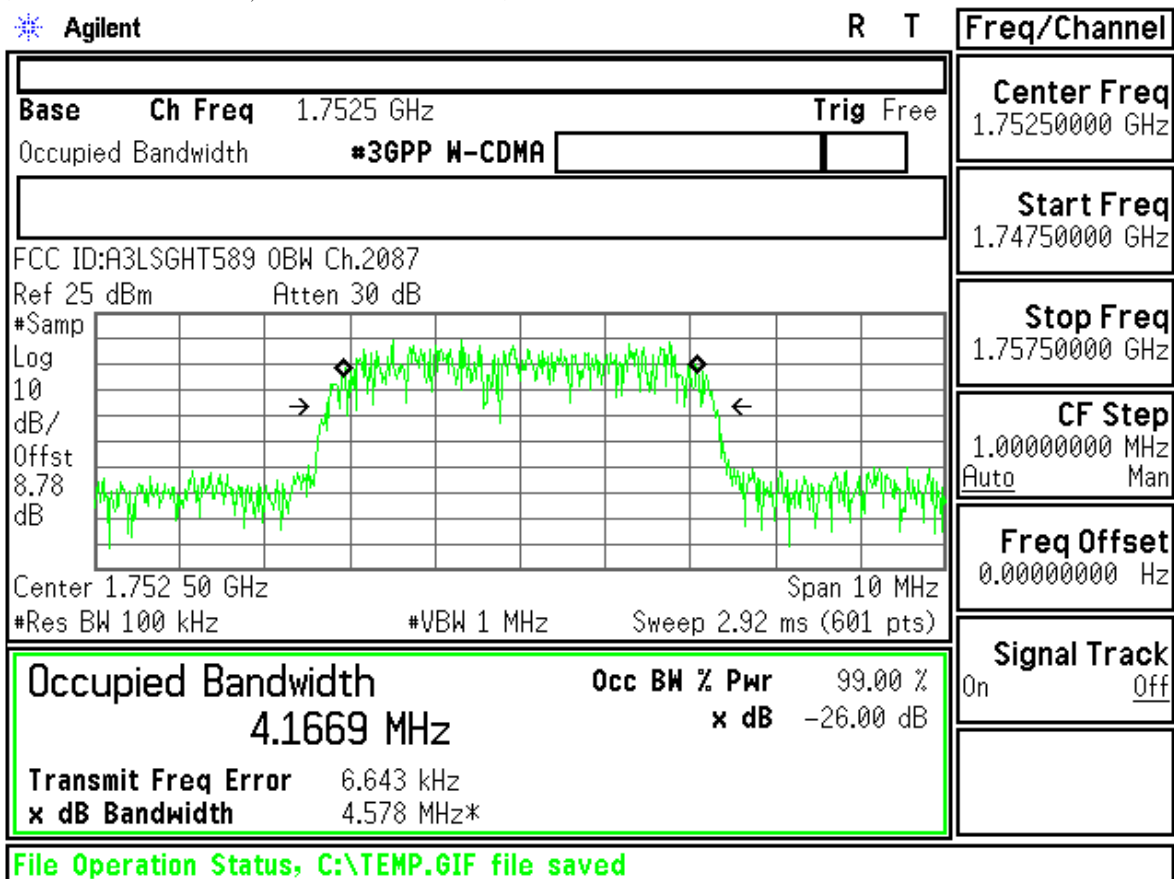


(UL Channel : 1312, DL Channel : 1537)

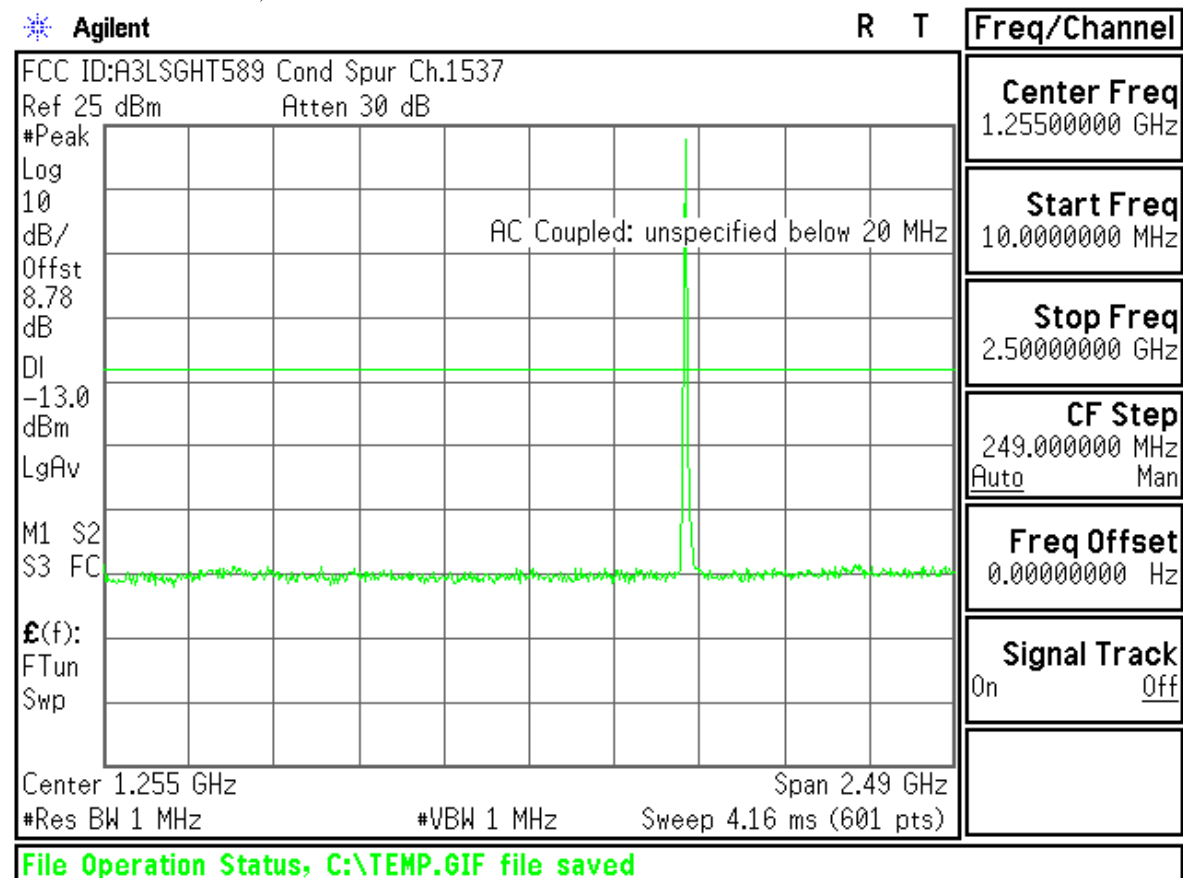


(UL Channel : 1312, DL Channel : 1537)

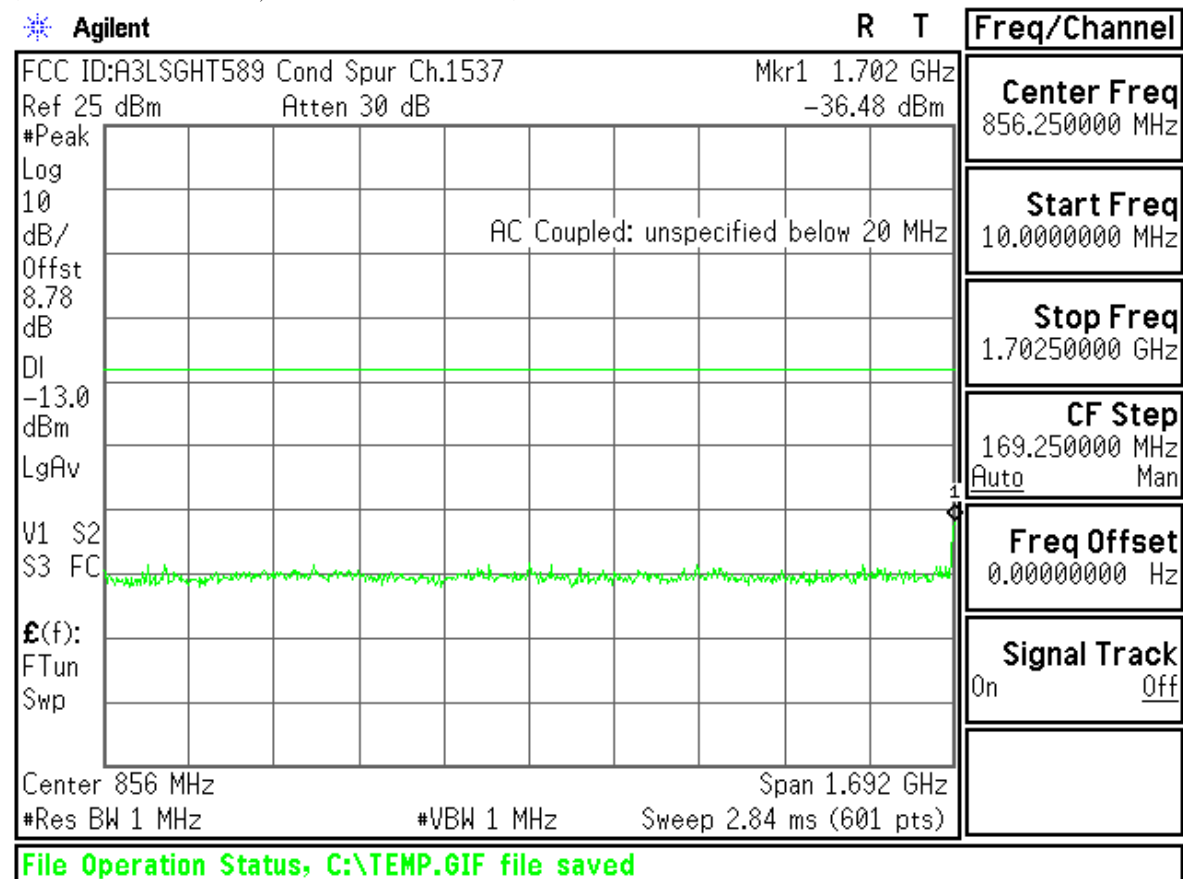


(UL Channel : 1312, DL Channel : 1537)

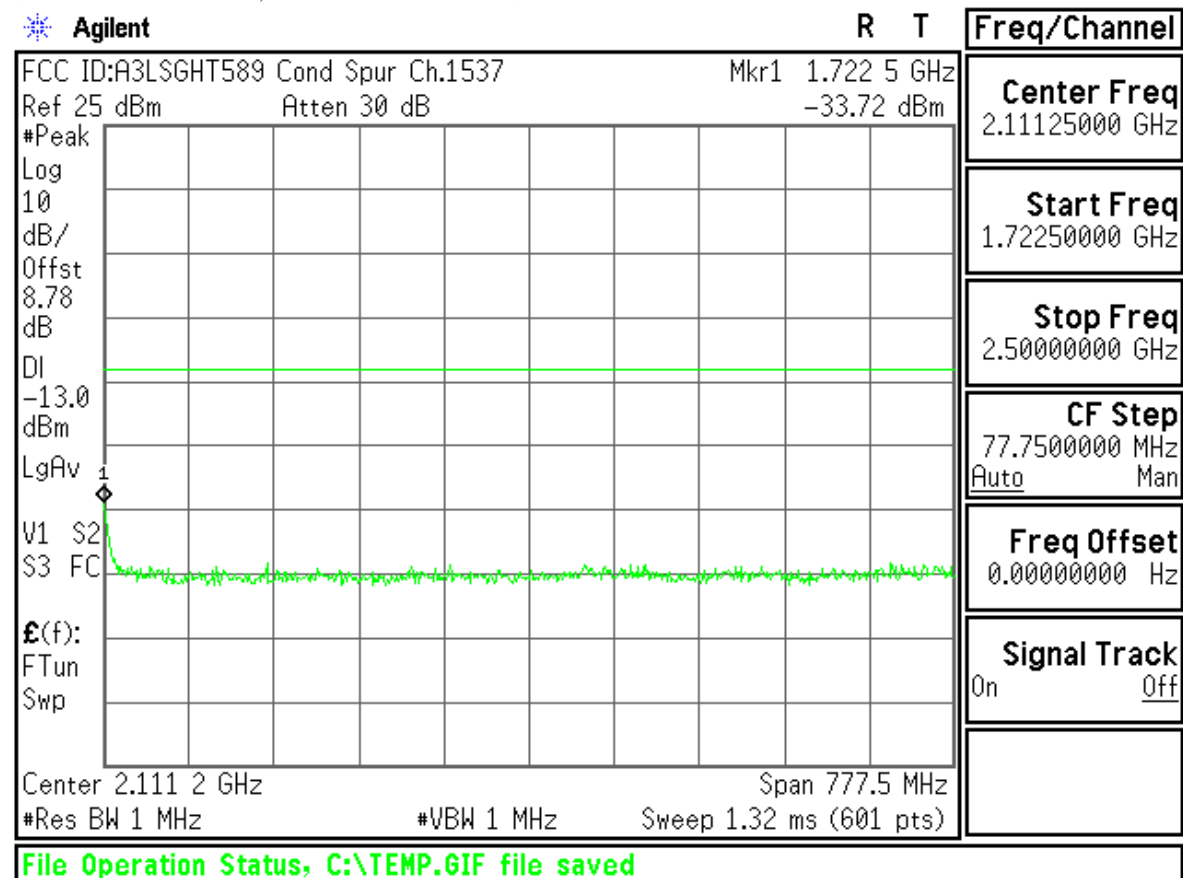


(UL Channel : 1312, DL Channel : 1537)

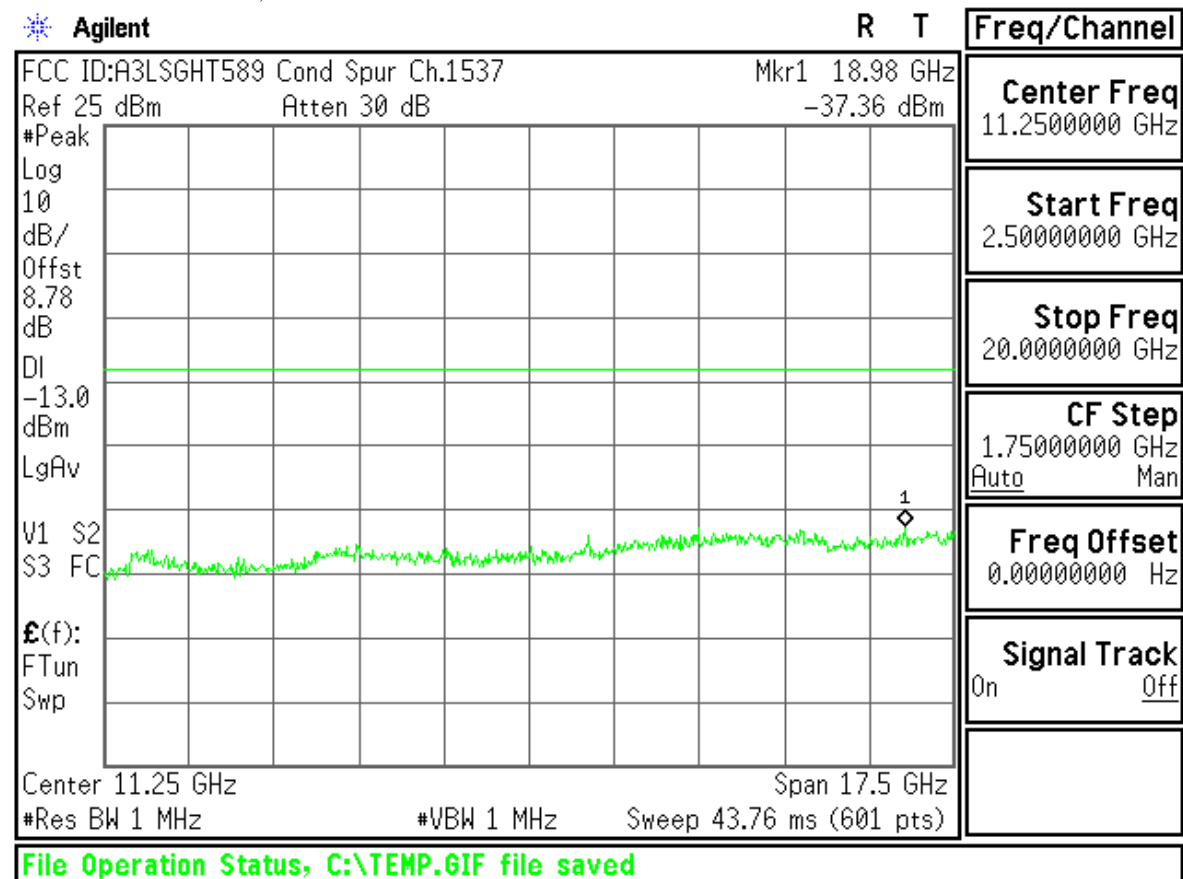


(UL Channel : 1412, DL Channel : 1637)

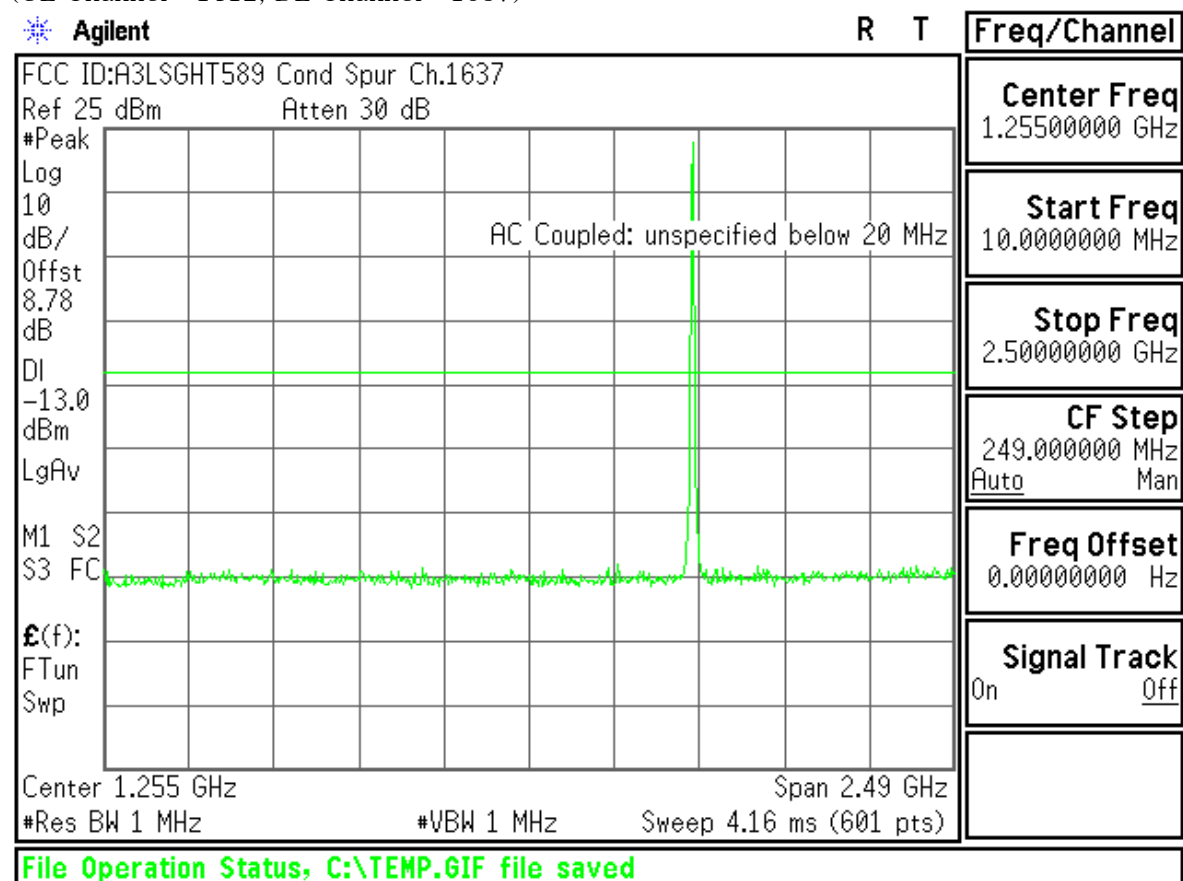


(UL Channel : 1412, DL Channel : 1637)

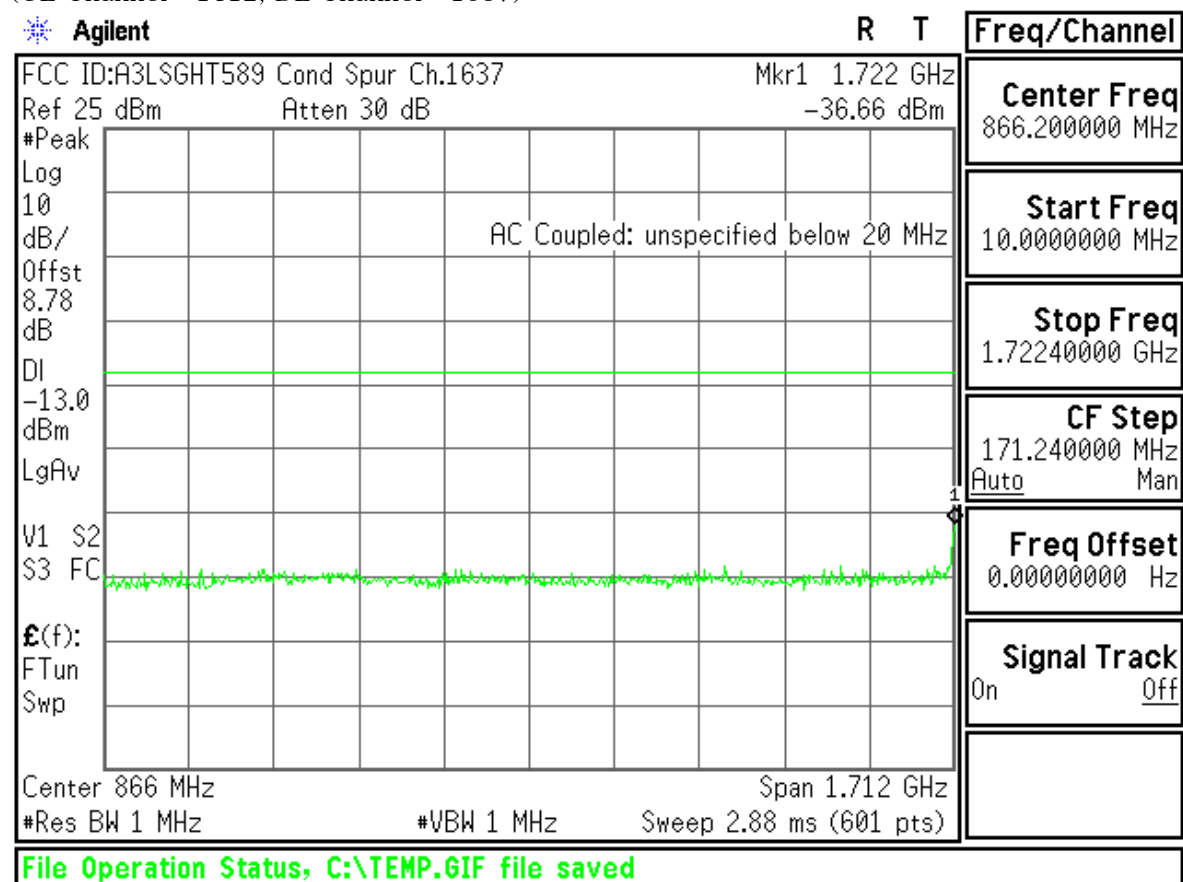


(UL Channel : 1412, DL Channel : 1637)

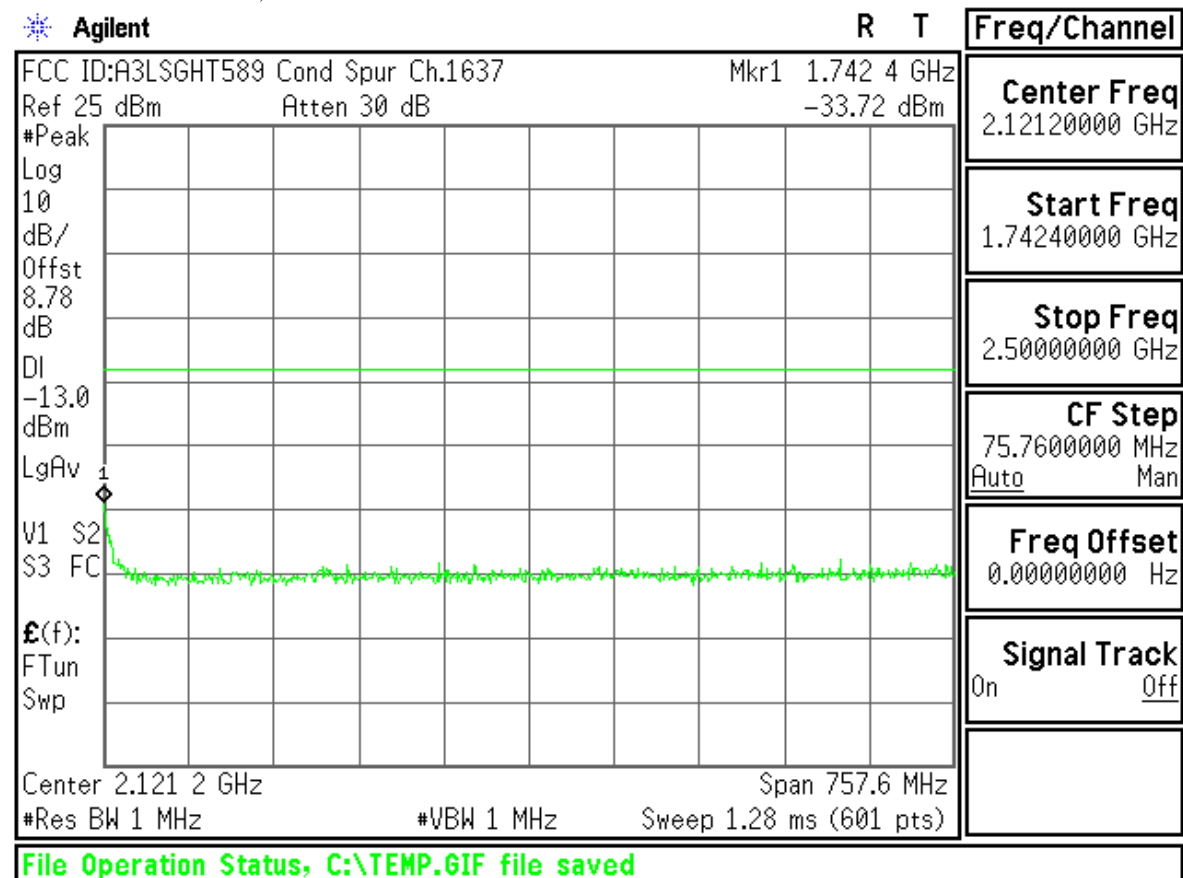


(UL Channel : 1412, DL Channel : 1637)

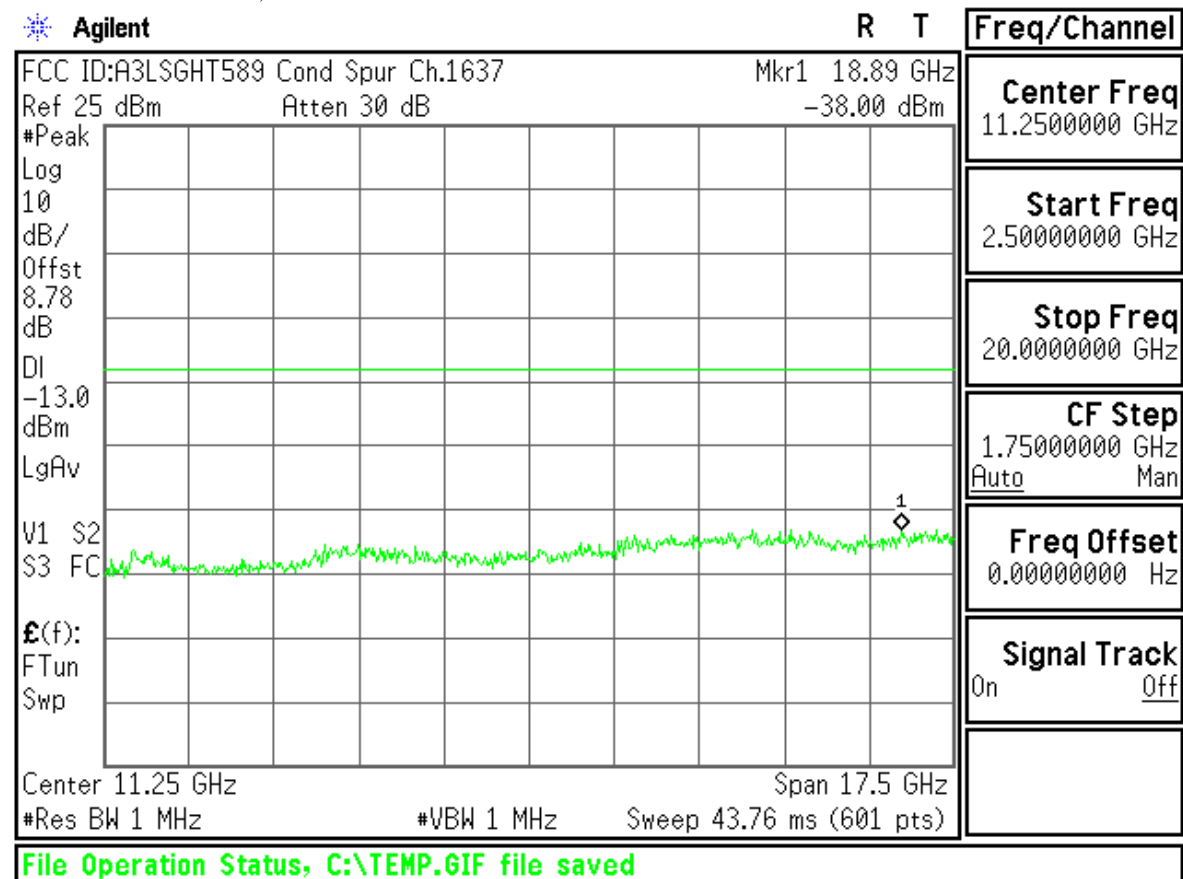


(UL Channel : 1862, DL Channel : 2087)

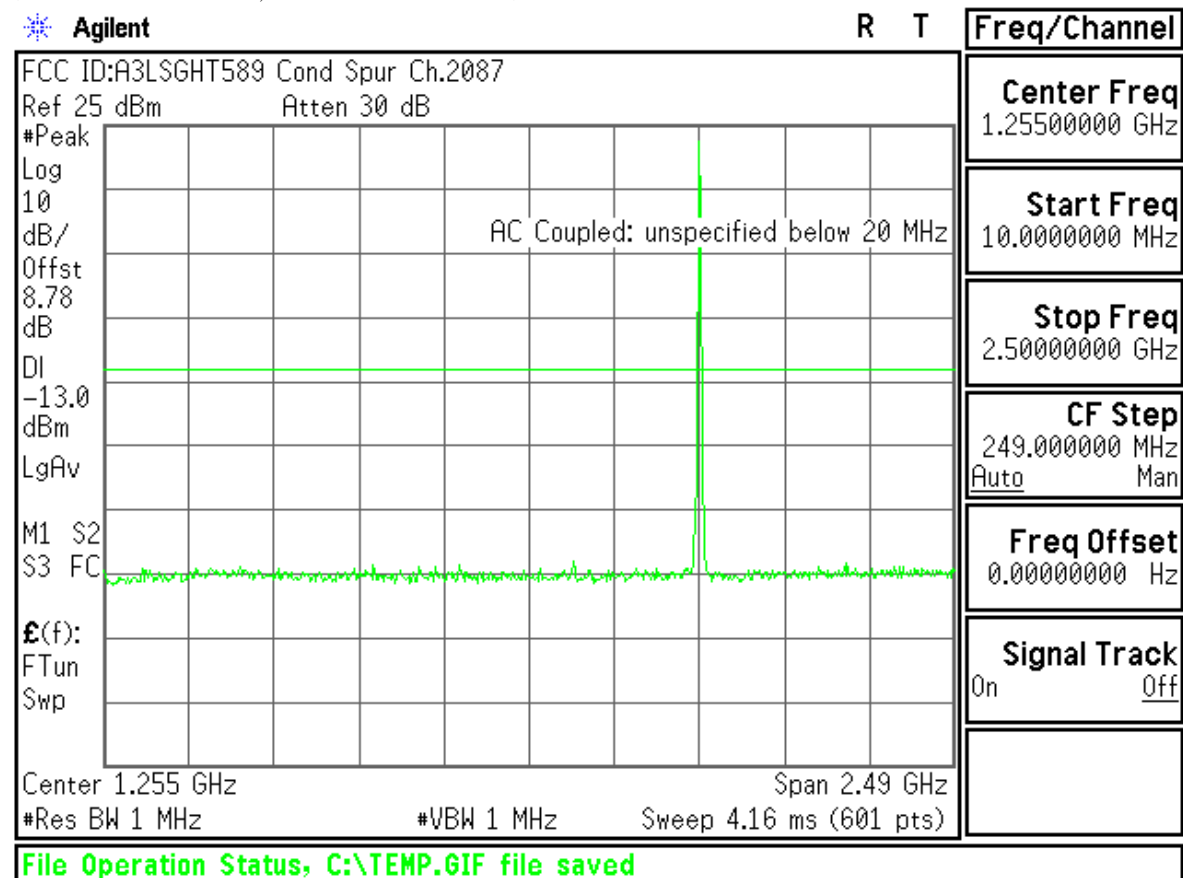


(UL Channel : 1862, DL Channel : 2087)

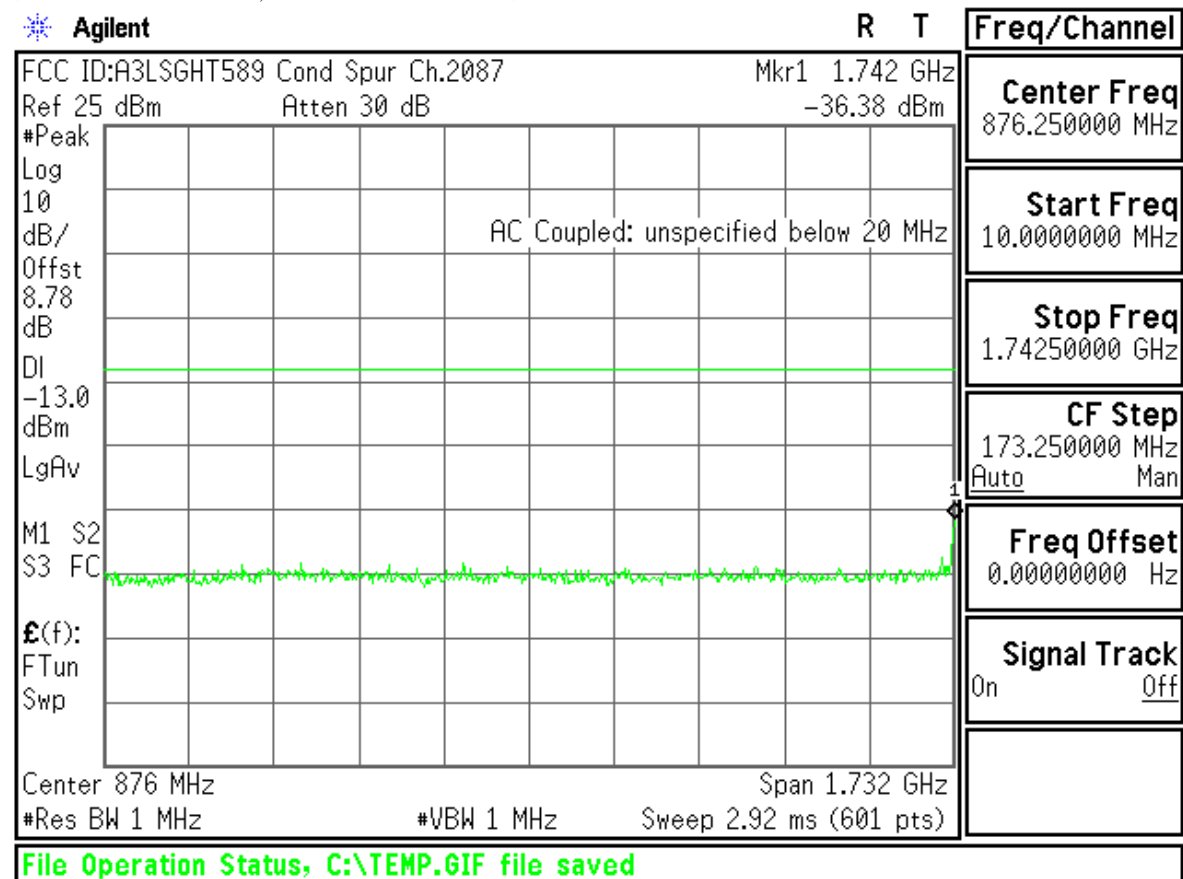


(UL Channel : 1862, DL Channel : 2087)

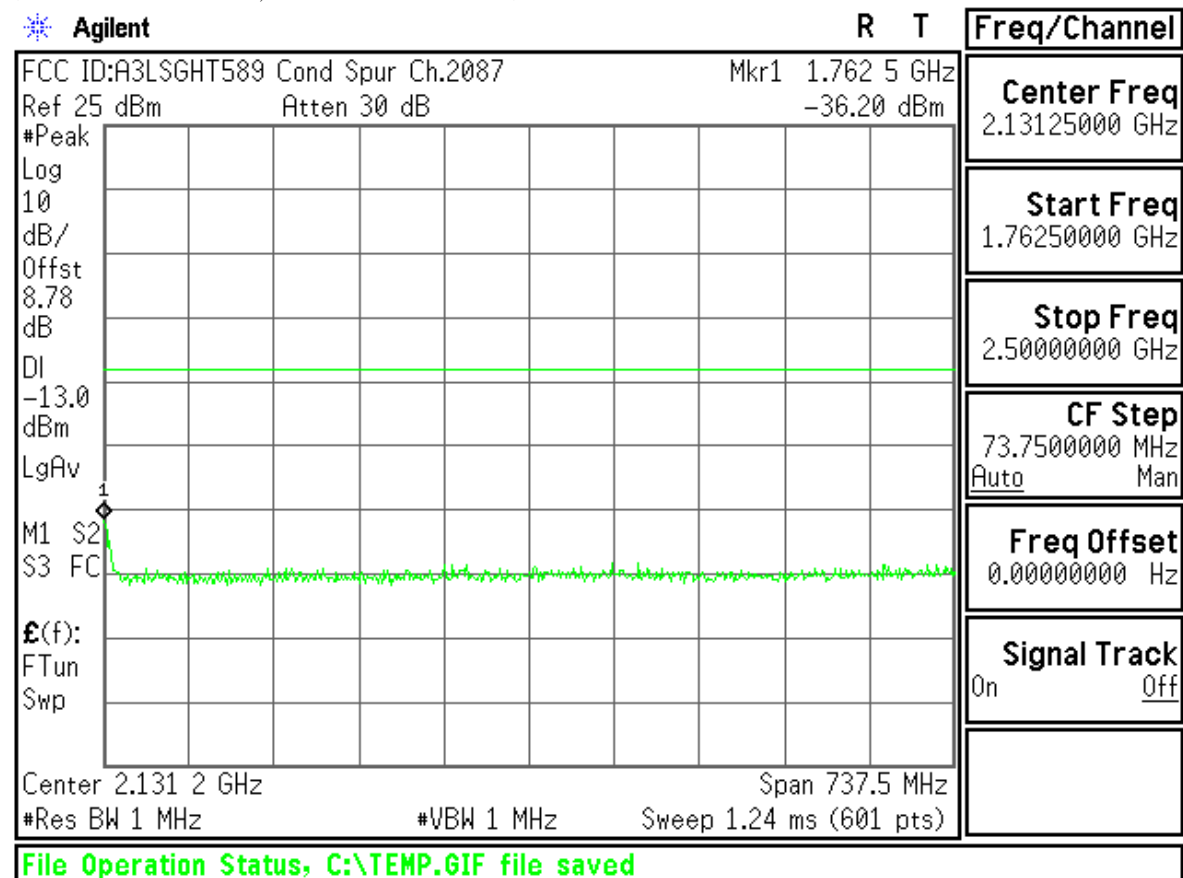


(UL Channel : 1862, DL Channel : 2087)

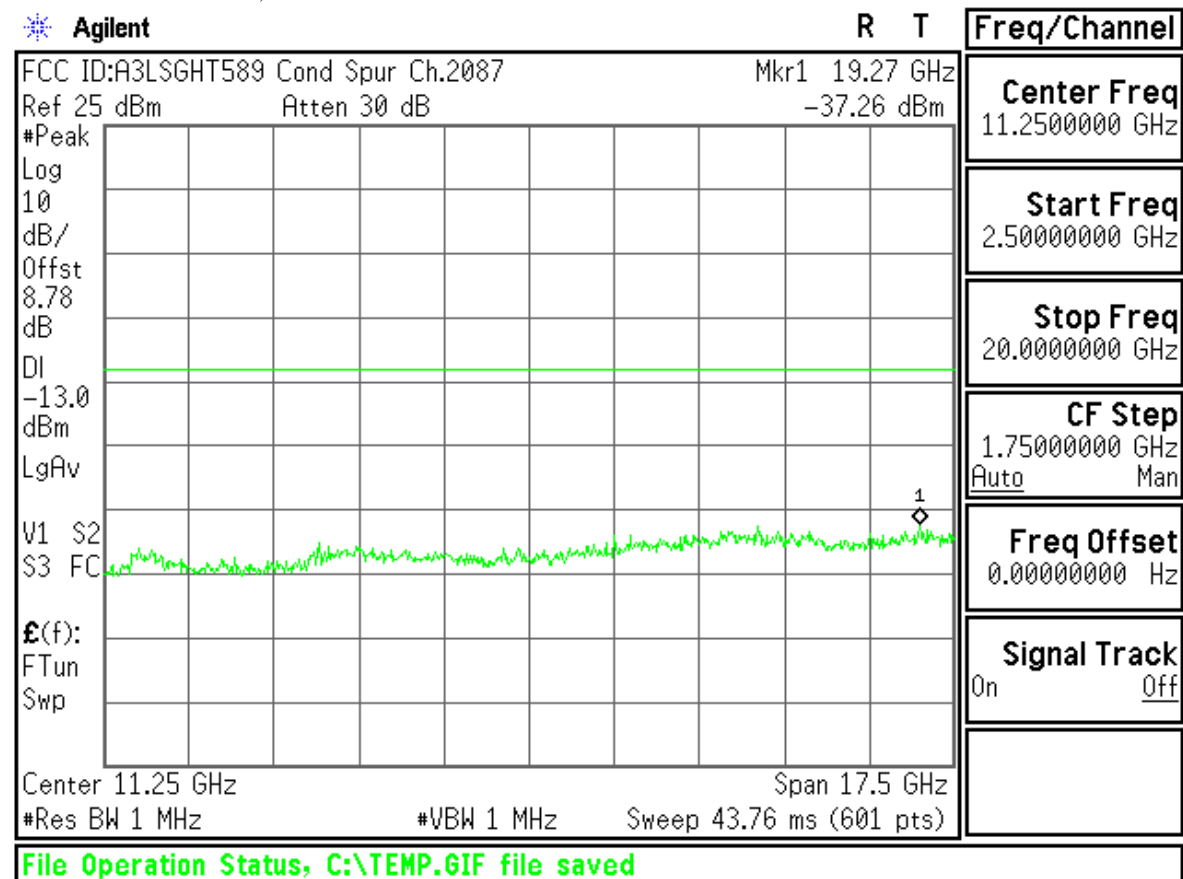


(UL Channel : 1312, DL Channel : 1537)

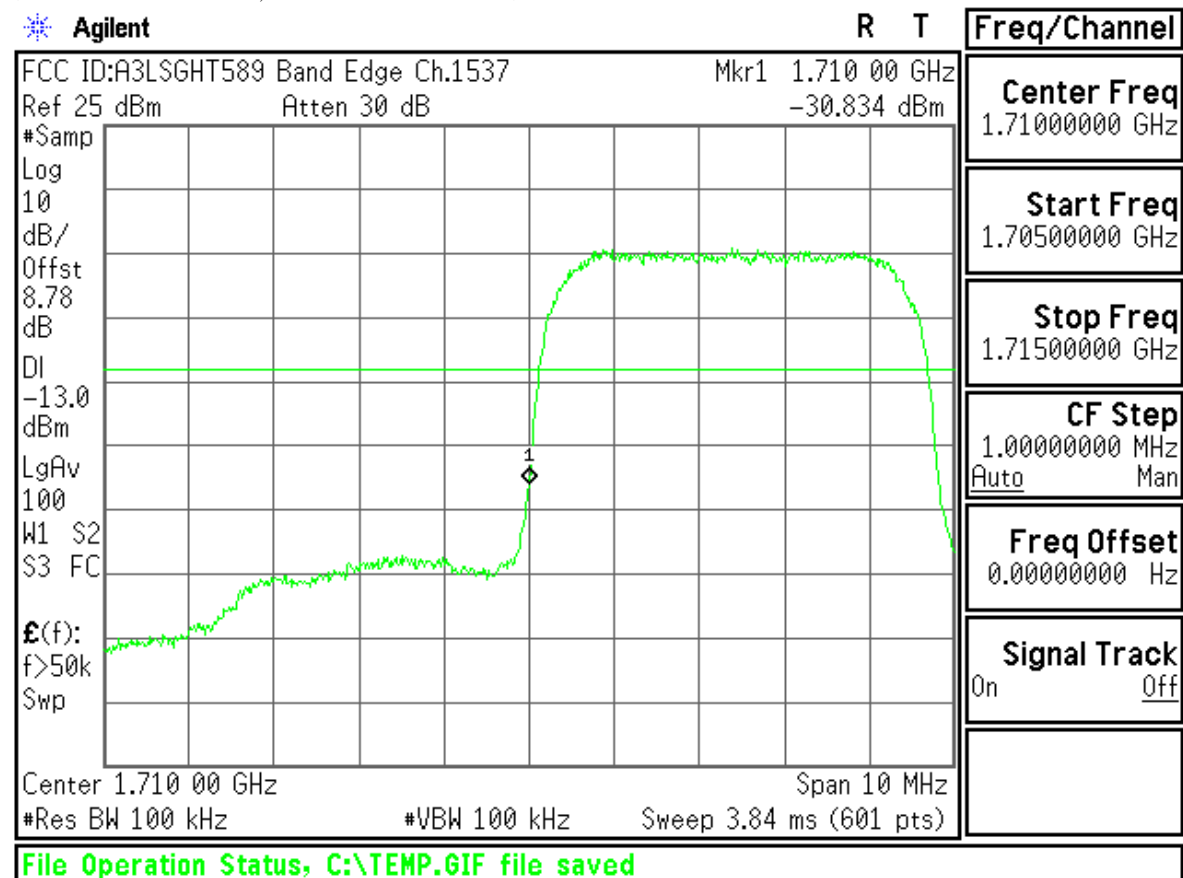


(UL Channel : 1862, DL Channel : 2087)

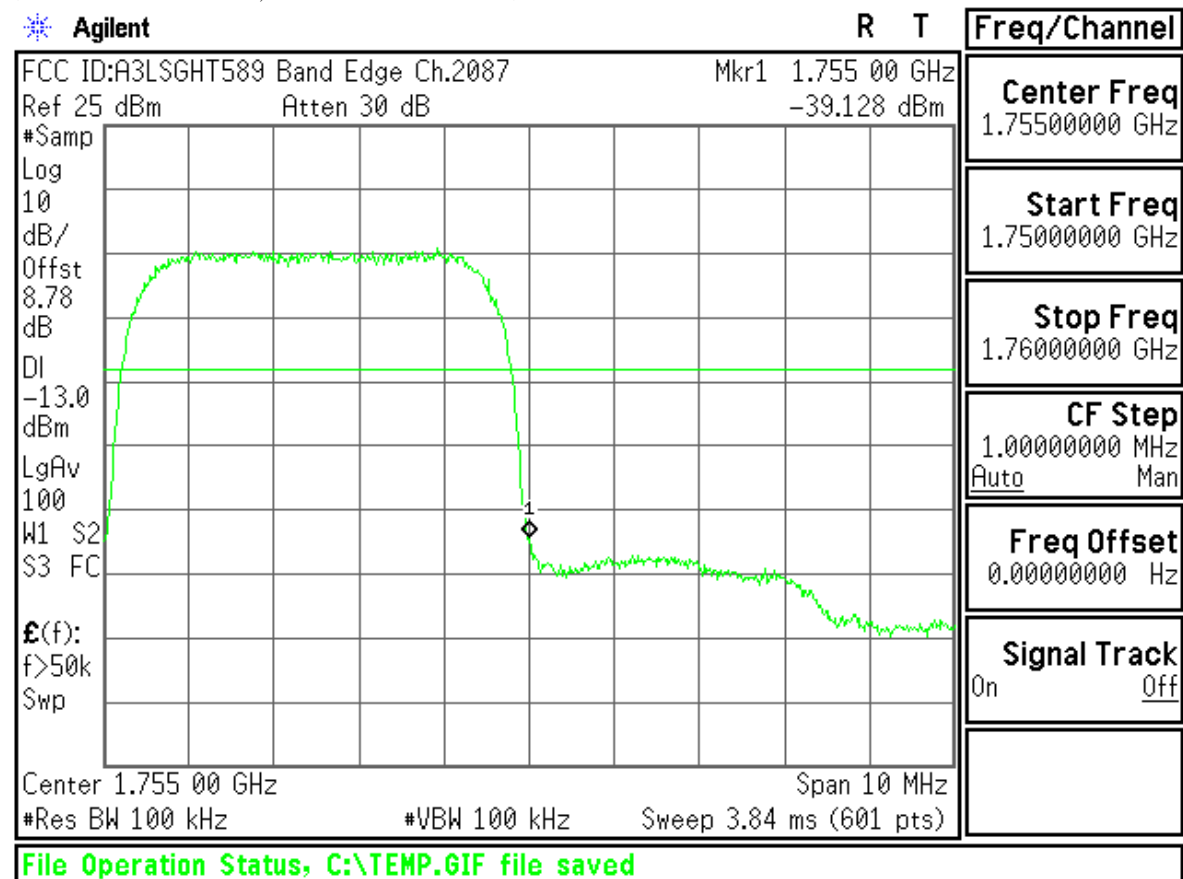

(UL Channel : 1312, DL Channel : 1537)

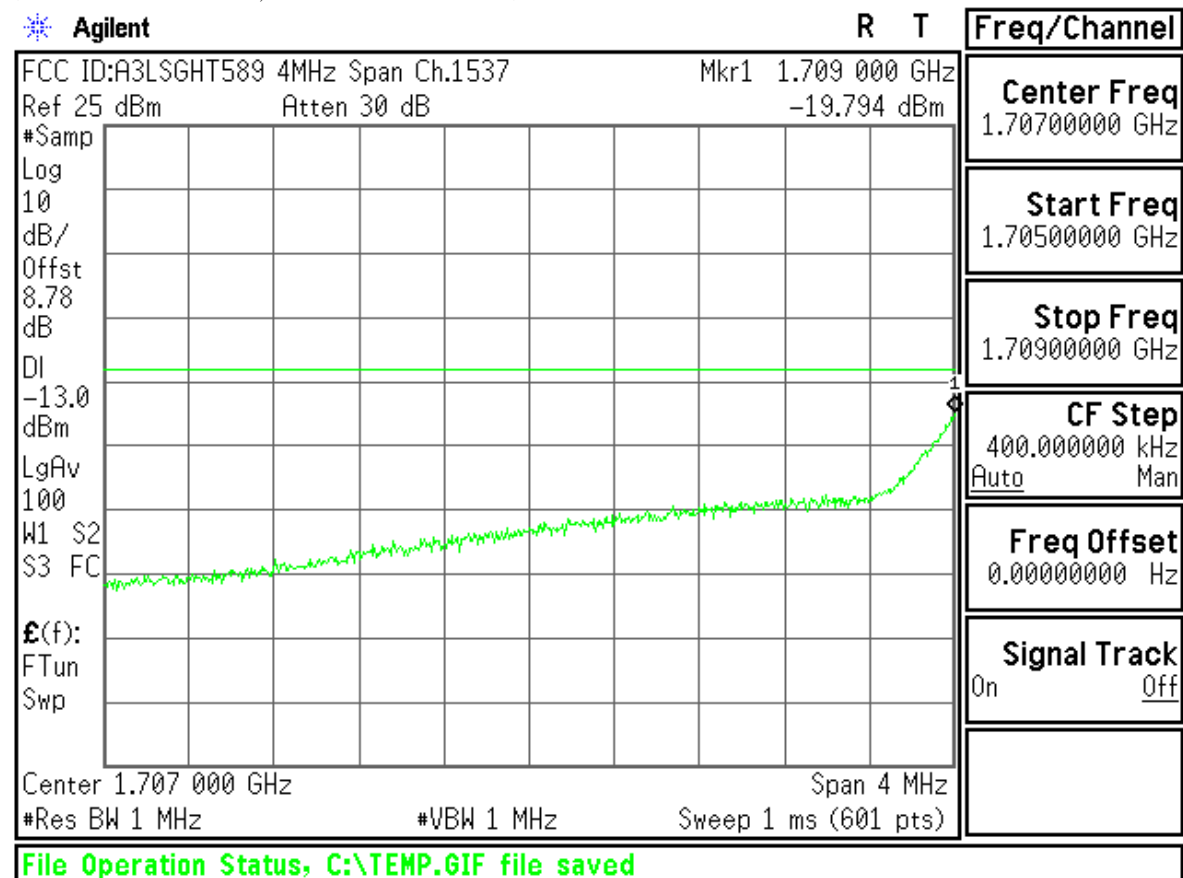

(UL Channel : 1862, DL Channel : 2087)

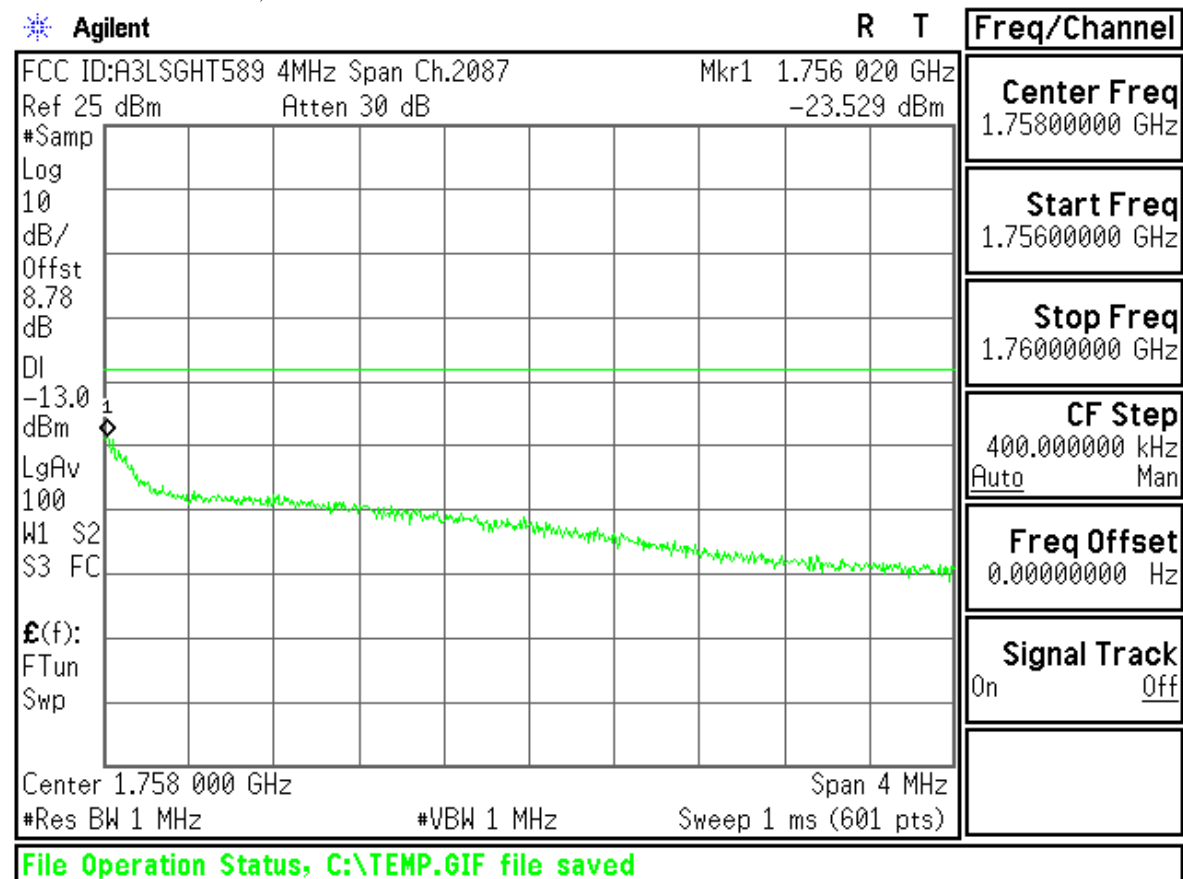

(UL Channel : 1412, DL Channel : 1637)

Agilent

R T

