



TEST REPORT

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0003 Page (1) of (323)	KCTL
--	---	---

- 1. Client**
 - Name : Samsung Electronics Co., Ltd.
 - Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677
Rep. of Korea
 - Date of Receipt : 2022-12-05
- 2. Use of Report** : Certification
- 3. Name of Product and Model** : Mobile Phone
 - Model Name : SM-A245M/DSN
 - Manufacturer and Country of Origin : Samsung Electronics Co., Ltd. / VIETNAM
- 4. FCC ID** : A3LSMA245M
- 5. Date of Test** : 2023-01-05 ~ 2023-01-16
- 6. Location of Test** : ☒ Permanent Testing Lab ☐ On Site Testing
 (Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)
- 7. Test Standards** : IEEE 1528-2013, ANSI/IEEE C95.1, KDB Publication
- 8. Test Results** : Refer to the test result in the test report

Affirmation	Tested by Name : Mungi Jeong (Signature)	Technical Manager Name : Jongwon Ma (Signature)
	2023-01-19	

Eurofins KCTL Co.,Ltd.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0003 Page (2) of (323)	
--	---	---

REPORT REVISION HISTORY

Date	Revision	Page No
2023-01-19	Originally issued	-

This report shall not be reproduced except in full, without the written approval of Eurofins KCTL Co.,Ltd. This document may be altered or revised by Eurofins KCTL Co.,Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Eurofins KCTL Co.,Ltd. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

☒ Statement not required by the standard or client used for type testing

1. Identification when information is provided by the customer: Information marked " #" is provided by the customer. - Disclaimer: This information is provided by the customer and can affect the validity of results.

CONTENTS

1. General information.....	4
2. Device information	5
3. #LTE Information	15
4. Specific Absorption Rate	17
5. SAR Measurement Procedures.....	18
6. SAR Measurement Configurations.....	19
7. RF Exposure Limits	23
8. SAR General Measurement Procedures	24
9. RF Average Conducted Output Power.....	31
10. System Verification	67
11. SAR Test Results	70
12. Simultaneous Transmission	88
13. SAR Measurement Variability.....	108
14. Measurement Uncertainty.....	109
15. Test Equipment Information	110
16. Test System Verification Results	112
17. Test Results	130
Appendixes List.....	182
Appendix A. Calibration certificate	183
Appendix B. SAR Tissue Specification.....	302
Appendix C. Power Reduction Verification	303
Appendix D. #Antenna Location & Distance	309
Appendix E. EUT Photo	312
Appendix F. Test Setup Photo.....	315
End of test report	323

1. General information

Client : Samsung Electronics Co., Ltd.
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
 Manufacturer : Samsung Electronics Co., Ltd.
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
 Factory : Samsung Electronics Vietnam Thai Nguyen Co., Ltd
 Address : Yen Binh Industrial Park, Dong Tien Ward, Pho Yen Town, Thai Nguyen Province, Vietnam
 Laboratory : Eurofins KCTL Co.,Ltd.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-3327, G-198, C-3706, T-1849
 CAB Identifier: KR0040, ISED Number: 8035A
 KOLAS No.: KT231

1.1 Report Overview

This report details the results of testing carried out on the samples listed in section 2, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this test report is used in any configuration other than that detailed in the test report, the manufacturer must ensure the new configuration complies with all relevant standards and certification requirements. Any mention of Eurofins KCTL Co.,Ltd. Wireless lab or testing done by Eurofins KCTL Co.,Ltd. Wireless lab made in connection with the distribution or use of the tested product must be approved in writing by Eurofins KCTL Co.,Ltd. Wireless lab.

2. Device information

2.1 Basic description

Product Name		Mobile Phone		
Product Model Name		SM-A245M/DSN		
Derivative Model		SM-A245M/N		
Product Manufacturer		Samsung Electronics Co., Ltd.		
Product Serial Number	Radiation	67E3172086337ECE, 67E3172167337ECE		
		67E31720C5337ECE, R38TB005M6K		
	Conduction	R38TB005L6E, R38TB005MCL		
		67E3172142337ECE		
Device Overview		Band & Mode	Operating Modes	Tx Frequency (MHz)
		GSM/GPRS/EDGE 850	Voice/Data	824.2 ~ 848.8
		GSM/GPRS/EDGE 1900	Voice/Data	1 850.2 ~ 1 909.8
		WCDMA Band II	Voice/Data	1 852.4 ~ 1 907.6
		WCDMA Band IV	Voice/Data	1 712.4 ~ 1 752.6
		WCDMA Band V	Voice/Data	826.4 ~ 846.6
		LTE Band 2	Voice/Data	1 850.7 ~ 1 909.3
		LTE Band 4	Voice/Data	1 710.7 ~ 1 754.3
		LTE Band 5	Voice/Data	824.7 ~ 848.3
		LTE Band 12	Voice/Data	699.7 ~ 715.3
		LTE Band 13	Voice/Data	779.5 ~ 784.5
		LTE Band 17	Voice/Data	706.5 ~ 713.5
		LTE Band 26	Voice/Data	814.7 ~ 848.3
		LTE Band 41	Voice/Data	2 498.5 ~ 2 687.5
		LTE Band 66	Voice/Data	1 710.7 ~ 1 779.3
		2.4 GHz WLAN	Voice/Data	2 412.0 ~ 2 472.0
		U-NII-1	Voice/Data	5 180.0 ~ 5 240.0
		U-NII-2A	Voice/Data	5 260.0 ~ 5 320.0
		U-NII-2C	Voice/Data	5 500.0 ~ 5 720.0
		U-NII-3	Voice/Data	5 745.0 ~ 5 825.0
		Bluetooth	Data	2 402.0 ~ 2 480.0
		NFC	Data	13.56
		TDWR Information		5.60 GHz~ 5.65 GHz band (TDWR) is supported by the device.

2.2 Summary of SAR Test Results

Band	Equipment Class	Highest Reported			
		1g SAR (W/kg)			10g SAR (W/kg)
		Head	Body-Worn	Hotspot	Phablet
GSM/GPRS/EDGE 850	PCE	0.40	0.49	0.96	N/A
GSM/GPRS/EDGE 1900	PCE	0.25	0.27	0.46	N/A
WCDMA Band II	PCE	0.29	0.39	0.43	N/A
WCDMA Band IV	PCE	0.23	0.33	0.38	N/A
WCDMA Band V	PCE	0.34	0.40	0.96	N/A
LTE Band 2	PCE	0.28	0.41	0.48	N/A
LTE Band 4	PCE	N/A	N/A	N/A	N/A
LTE Band 5	PCE	0.30	0.37	0.77	N/A
LTE Band 12	PCE	0.25	0.37	0.44	N/A
LTE Band 13	PCE	0.24	0.37	0.47	N/A
LTE Band 17	PCE	N/A	N/A	N/A	N/A
LTE Band 26	PCE	0.18	0.28	0.62	N/A
LTE Band 41	PCE	0.30	0.25	0.44	N/A
LTE Band 66	PCE	0.23	0.35	0.42	N/A
2.4 GHz WLAN	DTS	0.26	0.26	0.62	N/A
U-NII-1	NII	N/A	N/A	N/A	N/A
U-NII-2A	NII	0.46	0.24	N/A	1.08
U-NII-2C	NII	0.53	0.38	N/A	1.25
U-NII-3	NII	0.62	0.44	0.83	N/A
Bluetooth	DSS	0.38	0.12	0.29	N/A
NFC	DXX	N/A	N/A	N/A	< 0.10
Simultaneous SAR per KDB 690783 D01v01r03		1.33	1.05	1.58	1.26

2.3 #Antenna information

Antenna Type		PIFA Antenna											
Band		GSM		WCDMA			LTE						
		850	1900	II	IV	V	2	5	12	13	26	41	66
Peak gain (dBi)	Main 1	-1.0	-	-	-	-1.0	-	-1.0	-2.3	-2.3	-1.0	-	-
	Main 2	-	3.5	3.5	-0.2		3.5	-	-	-	--	1.2	-0.2

Antenna Type		Monopole Antenna			
Band		WLAN 2.4 GHz / Bluetooth	UNII-2A	UNII-2C	UNII-3
Peak gain (dBi)		-2.1	-2.0	-2.0	-2.1

2.4 Measurement date and environment

Shield room	Date	Environment	
		Temperature (°C)	Humidity (%)
8F - 2	2023-01-14	20.8 ~ 21.4	41.5
8F - 3	2023-01-05	20.5 ~ 20.9	46.1
	2023-01-06	20.4 ~ 20.5	45.2
	2023-01-09	20.3 ~ 20.5	45.0
	2023-01-10	20.4 ~ 20.7	45.1
	2023-01-11	20.7 ~ 20.9	45.7
	2023-01-12	20.8 ~ 21.1	47.2
	2023-01-13	20.9 ~ 21.2	47.1
	2023-01-14	20.7 ~ 20.8	47.4
	2023-01-16	20.7 ~ 20.9	46.7
8F - 4	2023-01-09	21.1 ~ 21.3	48.0
	2023-01-10	21.0 ~ 21.2	49.0
	2023-01-11	20.7 ~ 21.2	47.5
	2023-01-12	20.7 ~ 20.9	47.2
	2023-01-13	21.3 ~ 21.6	48.9
	2023-01-14	21.1 ~ 21.2	48.6

2.5 Power Reduction for SAR

This device utilizes a power reduction mechanism for some wireless modes and bands for SAR compliance under portable hotspot conditions. All hotspot SAR evaluations for this device were performed at the maximum allowed output power when hotspot is enabled.

This device uses an independent fixed level power reduction mechanism for WLAN operations during VoWiFi held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the Head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

2.6 #Maximum Tune-up power

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D04v01.

Band	Mode	Output Power(dBm)			
		Normal		Back-off (Grip Sensor, Hotspot, Ear-jack)	
		Target	Max. Allowed	Target	Max. Allowed
GSM 850	GSM Voice	32.80	33.80	Not Supported	
	GPRS 1 TX	32.80	33.80		
	GPRS 2 TX	31.50	32.50		
	GPRS 3 TX	29.50	30.50		
	GPRS 4 TX	28.50	29.50		
	EGPRS 1 TX	26.00	27.00		
	EGPRS 2 TX	25.00	26.00		
	EGPRS 3 TX	23.00	24.00		
	EGPRS 4 TX	21.50	22.50		
GSM 1900	GSM Voice	30.00	31.00	Not Supported	
	GPRS 1 TX	30.00	31.00	28.00	29.00
	GPRS 2 TX	29.00	30.00	27.00	28.00
	GPRS 3 TX	27.00	28.00	25.00	26.00
	GPRS 4 TX	26.00	27.00	24.00	25.00
	EGPRS 1 TX	25.00	26.00	23.00	24.00
	EGPRS 2 TX	24.00	25.00	22.00	23.00
	EGPRS 3 TX	21.50	22.50	19.50	20.50
	EGPRS 4 TX	20.50	21.50	18.50	19.50

Band	Mode	Output Power(dBm)			
		Normal		Back-off (Grip Sensor, Hotspot, Ear-jack)	
		Target	Max. Allowed	Target	Max. Allowed
WCDMA Band II					
RMC		23.50	24.50	20.50	21.50
AMR		23.50	24.50	Not Supported	
HSDPA	Subtest 1	22.50	23.50	19.50	20.50
	Subtest 2	22.50	23.50	19.50	20.50
	Subtest 3	22.00	23.00	19.00	20.00
	Subtest 4	22.00	23.00	19.00	20.00
HSUPA	Subtest 1	22.00	23.00	18.50	19.50
	Subtest 2	20.00	21.00	16.50	17.50
	Subtest 3	21.00	22.00	17.50	18.50
	Subtest 4	20.00	21.00	16.50	17.50
	Subtest 5	22.00	23.00	18.50	19.50
DC-HSDPA	Subtest 1	22.50	23.50	19.50	20.50
	Subtest 2	22.50	23.50	19.50	20.50
	Subtest 3	22.00	23.00	19.00	20.00
	Subtest 4	22.00	23.00	19.00	20.00
WCDMA Band IV					
RMC		23.50	24.50	20.50	21.50
AMR		23.50	24.50	Not Supported	
HSDPA	Subtest 1	22.50	23.50	19.50	20.50
	Subtest 2	22.50	23.50	19.50	20.50
	Subtest 3	22.00	23.00	19.00	20.00
	Subtest 4	22.00	23.00	19.00	20.00
HSUPA	Subtest 1	22.00	23.00	18.50	19.50
	Subtest 2	20.00	21.00	16.50	17.50
	Subtest 3	21.00	22.00	17.50	18.50
	Subtest 4	20.00	21.00	16.50	17.50
	Subtest 5	22.00	23.00	18.50	19.50
DC-HSDPA	Subtest 1	22.50	23.50	19.50	20.50
	Subtest 2	22.50	23.50	19.50	20.50
	Subtest 3	22.00	23.00	19.00	20.00
	Subtest 4	22.00	23.00	19.00	20.00
WCDMA Band V					
RMC		24.50	25.50	Not Supported	
AMR		24.50	25.50		
HSDPA	Subtest 1	23.50	24.50		
	Subtest 2	23.50	24.50		
	Subtest 3	23.00	24.00		
	Subtest 4	23.00	24.00		
HSUPA	Subtest 1	23.00	24.00		
	Subtest 2	21.00	22.00		
	Subtest 3	22.00	23.00		
	Subtest 4	21.00	22.00		
	Subtest 5	23.00	24.00		
DC-HSDPA	Subtest 1	23.50	24.50		
	Subtest 2	23.50	24.50		
	Subtest 3	23.00	24.00		
	Subtest 4	23.00	24.00		

Band	Output Power(dBm)									
	Normal		Back-off							
			Grip Sensor		Ear-jack		Hotspot		RCV	
	Target	Max. Allowed	Target	Max. Allowed	Target	Max. Allowed	Target	Max. Allowed	Target	Max. Allowed
LTE Band 2	23.50	24.50	20.50	21.50	20.50	21.50	20.50	21.50	Not Supported	
*LTE Band 4	24.00	25.00	20.50	21.50	20.50	21.50	20.50	21.50	Not Supported	
LTE Band 5	24.00	25.00	20.00	21.00	Not Supported					
LTE Band 12	24.00	25.00	Not Supported							
LTE Band 13	24.00	25.00	Not Supported							
*LTE Band 17	24.00	25.00	Not Supported							
LTE Band 26	23.50	24.50	Not Supported							
LTE Band 41	23.00	24.00	22.00	23.00	22.00	23.00	22.00	23.00	Not Supported	
LTE Band 66	24.00	25.00	20.50	21.50	20.50	21.50	20.50	21.50	Not Supported	

Notes:

***LTE Band 4 Measured Results**

SAR for LTE Band 4 (Frequency range: 1 710.7 ~ 1 754.3 MHz) is covered by LTE Band 66 (Frequency range: 1 710.7 ~ 1 779.3 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

***LTE Band 17 Measured Results**

SAR for LTE Band 17 (Frequency range: 706.5 ~ 713.5 MHz) is covered by LTE Band 12 (Frequency range: 699.7 ~ 715.3 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

Band	Mode	Channel	Output Power(dBm)			
			Normal		Back-off (RCV)	
			Target	Max. Allowed	Target	Max. Allowed
WLAN 2.4 GHz	802.11b	1 – 11	18.00	19.00	13.00	14.00
		12,13	8.00	9.00	8.00	9.00
	802.11g	1 – 11	16.00	17.00	13.00	14.00
		12,13	8.00	9.00	8.00	9.00
	802.11n(HT20)	1 – 11	15.50	16.50	13.00	14.00
		12,13	8.00	9.00	8.00	9.00
U-NII	802.11a	All Channel	15.00	16.00	10.00	11.00
	802.11n(HT20)	All Channel	15.00	16.00	10.00	11.00
	802.11n(HT40)	All Channel	14.00	15.00	10.00	11.00
	802.11ac(VHT20)	All Channel	15.00	16.00	10.00	11.00
	802.11ac(VHT40)	All Channel	14.00	15.00	10.00	11.00
	802.11ac(VHT80)	All Channel	13.00	14.00	10.00	11.00

Note: When the specified maximum output power is the same for both UNII Band1 and UNII Band 2A, begins SAR measurement in UNII band 2A; and if the highest reported SAR for U NII band 2A is $\leq 1.2\text{W/kg}$, SAR is not required for U-NII-1 band for that configuration; otherwise, each band is tested independently for SAR.

Band	Mode	Channel	Output Power (dB m)	
			Target	Max. Allowed
Bluetooth	BDR(GFSK)	All Channel	14.50	15.50
	EDR ($\pi/4$ DQPSK)	All Channel	12.00	13.00
	EDR(8DPSK)	All Channel	12.00	13.00
	LE(GFSK)	All Channel	5.00	6.00

2.7 #DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in Appendix D. Since the diagonal dimension of this device is > 160 mm and < 200 mm, it is considered a “Phablet”.

Mode	Device Edge for SAR Testing (Rear View)					
	Front	Rear	Left Edge	Right Edge	Top	Bottom
GPRS 850	Yes	Yes	Yes	Yes	No	Yes
GPRS 1900	Yes	Yes	Yes	No	No	Yes
WCDMA Band II	Yes	Yes	Yes	No	No	Yes
WCDMA Band IV	Yes	Yes	Yes	No	No	Yes
WCDMA Band V	Yes	Yes	Yes	Yes	No	Yes
LTE Band 2	Yes	Yes	Yes	No	No	Yes
LTE Band 5	Yes	Yes	Yes	Yes	No	Yes
LTE Band 12	Yes	Yes	Yes	Yes	No	Yes
LTE Band 13	Yes	Yes	Yes	Yes	No	Yes
LTE Band 26	Yes	Yes	Yes	Yes	No	Yes
LTE Band 41	Yes	Yes	Yes	No	No	Yes
LTE Band 66	Yes	Yes	Yes	No	No	Yes
2.4 GHz WLAN	Yes	Yes	Yes	No	Yes	No
5 GHz WLAN	Yes	Yes	Yes	No	Yes	No
Bluetooth	Yes	Yes	Yes	No	Yes	No
NFC	Yes	Yes	Yes	Yes	Yes	Yes

Note: Particular DUT edges were not required to be evaluated for Hotspot SAR or Phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 and FCC KDB Publication 648474 D04v01r03. The antenna document shows the distances between the transmit antennas and the edges of the device. When Hotspot mode is enabled, U-NII-1, U-NII-2A, U-NII-2C operations is disabled.

2.8 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device for the model. Therefore, all SAR test were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in Appendix D.

2.9 #Simultaneous Transmission Configurations

According to FCC KDB 447498 D04v01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D04v01 4.3.2 procedures.

No	Scenario	RF Exposure Condition			
		Head	Body-Worn	Hotspot	Phablet
1	Licensed + WLAN 2.4 GHz	Yes	Yes	Yes	Yes
2	Licensed + WLAN 5 GHz	Yes	Yes	Yes	Yes
3	Licensed + Bluetooth	Yes	Yes	Yes	Yes
4	Licensed + WLAN 5 GHz + Bluetooth	Yes	Yes	Yes	Yes
5	Licensed + WLAN 2.4 GHz + NFC	No	No	No	Yes
6	Licensed + WLAN 5 GHz + NFC	No	No	No	Yes
7	Licensed + Bluetooth + NFC	No	No	No	Yes
8	Licensed + WLAN 5 GHz + Bluetooth + NFC	No	No	No	Yes
9	Licensed + WLAN 2.4 GHz + WLAN 5 GHz	No			

Notes:

- It does not transmit simultaneously the Bluetooth and 2.4 GHz WLAN.
- It is to use the Bluetooth and 2.4 GHz WLAN same antenna path.
- This device supports Bluetooth Tethering.
- This device supports VoLTE.
- This device supports VoWiFi.
- WLAN Hotspot is supported for 2.4 GHz and UNII-3 of 5 GHz WLAN.
- 5 GHz Hotspot mode is only supported for the UNII-3, therefore U-NII-1, U-NII-2A, U-NII-2C were not evaluated for Hotspot mode conditions.
- NFC operation is handheld only, simultaneous operation is considered a phablet.

2.10 SAR Test Methods and Procedures

The tests documented in this report were performed in accordance with IEEE 1528-2013 and the following published KDB procedures:

- IEEE 1528-2013
- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D04 Interim General RF Exposure Guidance v01
- 616217 D04 SAR for laptop and tablets v01r02 (Proximity Sensor)
- 648474 D04 Handset SAR v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01
- October 2014 TCB Workshop Notes (Other LTE Considerations)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- April 2019 TCB Workshop Notes (Tissue Simulation Liquids)
- Nov. 2019 TCB Workshop Notes (SPLSR Hotspot Combination)

3. #LTE Information

LTE Information					
Form Factor	Portable Handset				
Frequency Range of each LTE transmission band	LTE Band 2 (1 850.7 ~ 1 909.3) MHz LTE Band 4 (1 710.7 ~ 1 754.3) MHz LTE Band 5 (824.7 ~ 848.3) MHz LTE Band 12 (699.7 ~ 715.3) MHz LTE Band 13 (779.5 ~ 784.5) MHz LTE Band 17 (706.5 ~ 713.5) MHz LTE Band 26 (814.7 ~ 848.3) MHz LTE Band 41 (2 498.5 ~ 2 687.5) MHz LTE Band 66 (1 710.7 ~ 1 779.3) MHz				
Channel Bandwidths	LTE Band 2: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 4: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 5: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 13: 5 MHz, 10 MHz LTE Band 17: 5 MHz, 10 MHz LTE Band 26: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 66: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 2: 1.4 MHz	1 850.7 (18 607)		1 880.0 (18 900)		1 909.3 (19 193)
LTE Band 2: 3 MHz	1 851.5 (18 615)		1 880.0 (18 900)		1 908.5 (19 185)
LTE Band 2: 5 MHz	1 852.5 (18 625)		1 880.0 (18 900)		1 907.5 (19 175)
LTE Band 2: 10 MHz	1 855.0 (18 650)		1 880.0 (18 900)		1 905.0 (19 150)
LTE Band 2: 15 MHz	1 857.5 (18 675)		1 880.0 (18 900)		1 902.5 (19 125)
LTE Band 2: 20 MHz	1 860.0 (18 700)		1 880.0 (18 900)		1 900.0 (19 100)
LTE Band 4: 1.4 MHz	1 710.7 (19 957)		1 732.5 (20 175)		1 754.3 (20 393)
LTE Band 4: 3 MHz	1 711.5 (19 965)		1 732.5 (20 175)		1 753.5 (20 385)
LTE Band 4: 5 MHz	1 712.5 (19 975)		1 732.5 (20 175)		1 752.5 (20 375)
LTE Band 4: 10 MHz	1 715.0 (20 000)		1 732.5 (20 175)		1 750.0 (20 350)
LTE Band 4: 15 MHz	1 717.5 (20 025)		1 732.5 (20 175)		1 747.5 (20 325)
LTE Band 4: 20 MHz	1 720.0 (20 050)		1 732.5 (20 175)		1 745.0 (20 300)
LTE Band 5: 1.4 MHz	824.7 (20 407)		836.5 (20 525)		848.3 (20 643)
LTE Band 5: 3 MHz	825.5 (20 415)		836.5 (20 525)		847.5 (20 635)
LTE Band 5: 5 MHz	826.5 (20 425)		836.5 (20 525)		846.5 (20 625)
LTE Band 5: 10 MHz	829.0 (20 450)		836.5 (20 525)		844.0 (20 600)
LTE Band 12: 1.4 MHz	699.7 (23 017)		707.5 (23 095)		715.3 (23 173)
LTE Band 12: 3 MHz	700.5 (23 025)		707.5 (23 095)		714.5 (23 655)
LTE Band 12: 5 MHz	701.5 (23 035)		707.5 (23 095)		713.5 (23 155)
LTE Band 12: 10 MHz	704.0 (23 060)		707.5 (23 095)		711.0 (23 130)

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0003 Page (16) of (323)	
--	---	---

Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 13: 5 MHz	779.5 (23 205)		782.0 (23 230)		784.5 (23 255)
LTE Band 13: 10 MHz	-		782.0 (23 230)		-
LTE Band 17: 5 MHz	706.5 (23 755)		710.0 (23 790)		713.5 (23 825)
LTE Band 17: 10 MHz	709.0 (23 780)		710.0 (23 790)		711.0 (23 800)
LTE Band 26: 1.4 MHz	814.7 (26 697)		831.5 (26 865)		848.3 (27 033)
LTE Band 26: 3 MHz	815.5 (26 705)		831.5 (26 865)		847.5 (27 025)
LTE Band 26: 5 MHz	816.5 (26 715)		831.5 (26 865)		846.5 (27 015)
LTE Band 26: 10 MHz	819.0 (26 740)		831.5 (26 865)		844.0 (26 990)
LTE Band 26: 15 MHz	821.5 (26 765)		831.5 (26 865)		841.5 (26 965)
LTE Band 41: 5 MHz	2 506.0 (39 750)	2 549.5 (40 185)	2 593.0 (40 620)	2 636.5 (41 055)	2 680.0 (41 490)
LTE Band 41: 10 MHz	2 506.0 (39 750)	2 549.5 (40 185)	2 593.0 (40 620)	2 636.5 (41 055)	2 680.0 (41 490)
LTE Band 41: 15 MHz	2 506.0 (39 750)	2 549.5 (40 185)	2 593.0 (40 620)	2 636.5 (41 055)	2 680.0 (41 490)
LTE Band 41: 20 MHz	2 506.0 (39 750)	2 549.5 (40 185)	2 593.0 (40 620)	2 636.5 (41 055)	2 680.0 (41 490)
LTE Band 66: 1.4 MHz	1 710.7 (131 979)		1 745.0 (132 322)		1 779.3 (132 665)
LTE Band 66: 3 MHz	1 711.5 (131 987)		1 745.0 (132 322)		1 778.5 (132 657)
LTE Band 66: 5 MHz	1 712.5 (131 997)		1 745.0 (132 322)		1 777.5 (132 647)
LTE Band 66: 10 MHz	1 715.0 (132 022)		1 745.0 (132 322)		1 775.0 (132 622)
LTE Band 66: 15 MHz	1 717.5 (132 047)		1 745.0 (132 322)		1 772.5 (132 597)
LTE Band 66: 20 MHz	1 720.0 (132 072)		1 745.0 (132 322)		1 770.0 (132 572)
UE Category	UL:5, DL:4				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3 ~ 6.2.5?(manufacturer attestation to be provided)	YES				
A-MPR(Additional MPR) disabled for SAR Testing?	YES				
LTE Carrier Aggregation Possible Combinations	This device not supports LTE CA aggregation.				
LTE Additional Information	The following LTE Release 10 Features are not supported: Relay, HetNet, Enhanced MIMO, eICIC, WIFI Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

4. Specific Absorption Rate

4.1 Introduction

The SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational / controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5. SAR Measurement Procedures

5.1 SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan & Zoom Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot and Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly. Area Scan & Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm ± 1 mm	$\frac{1}{2} \delta \cdot \ln(2)$ mm 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx _{Area} , Δy _{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx _{Zoom} , Δy _{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz _{Zoom} (n)		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	Δz _{Zoom} (1): between 1st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		Δz _{Zoom} (n>1): between subsequent points	≤ 1.5·Δz _{Zoom} (n-1) mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

6. SAR Measurement Configurations

6.1 Ear Reference Point

Figure 1 shows the front, back and side views of the SAM phantom. The “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERPs are 15 mm posterior to the entrance to the Ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 1. The plane Passing, through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck – Front) is perpendicular to the reference plane and passing through the LE (or RE) is called the Reference Pivoting Line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.




Figure 1
Close-Up Side view of ERP

6.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 2
Front, back and side view of SAM Twin Phantom

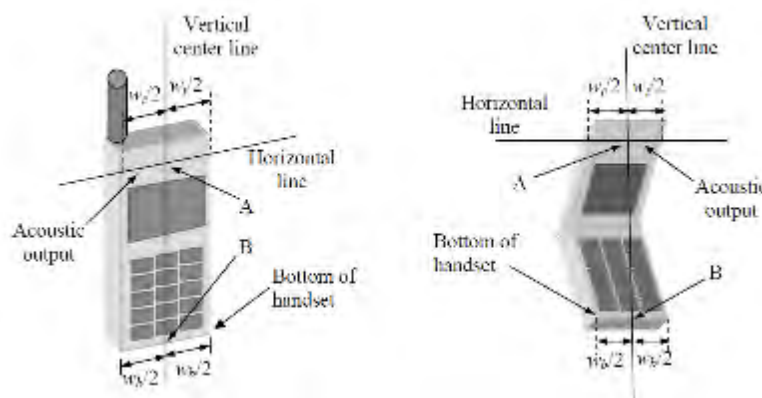


Figure 3
Handset Vertical Center & Horizontal Line Reference Points

6.3 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.4 Positioning for Cheek/Touch

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 4), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 4: Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 5).

6.5 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 5).



Figure 5: Front, Side and Top View of Ear/ 15° Tilt



Figure 6: Side view w/ relevant markings

6.6 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 7). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D04v01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.



Figure 7
Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D04v01 procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

6.8 Proximity Sensor Considerations

This device uses a power reduction mechanism to reduce output powers in certain use conditions when the device is used close to the user's body.

When the device's antenna is within a certain distance of the user, the sensor activates and reduces the maximum allowed output power. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, additional evaluation is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional test positions.

6.9 Phablet Configurations

For smart phones with a display diagonal dimension > 150 mm or an overall diagonal dimension > 160 mm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna ≤ 25 mm from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR > 1.2 W/kg.

7. RF Exposure Limits

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Partial Peak SAR ¹⁾ (Partial)	1.60 mW/g	8.00 mW/g
Partial Average SAR ²⁾ (Whole Body)	0.08 mW/g	0.40 mW/g
Partial Peak SAR ³⁾ (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

- 1) The spatial Peak value of the SAR averaged over any 1g gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- 2) The spatial Average value of the SAR averaged over the whole body.
- 3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

8. SAR General Measurement Procedures

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D04v01, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. Test highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

8.4 SAR Measurement Conditions for UMTS

8.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in sec. 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.4.2 Head SAR Measurement

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0003 Page (25) of (323)	
---	--	---

(signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

8.4.3 Body SAR measurements

SAR for body exposure configurations is measured using the 12.2kbps RMC with the TPC bits all “1s”. the 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using and applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported SAR configuration in 12.2kbps RMC.

8.4.4 SAR Measurements with Rel. 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using and FRC with H-SET 1 in Sub-test and a 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to release 6 HSPA test procedures. 8.4.5 SAR Measurement with Rel.6 HSUPA The 3G SAR test Reduction Procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, Using H-Set 1 and QPSK for FRC and a 12.2kbps RMC configured in Test Loop Mode 1 and Power Control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

8.4.5 SAR Measurements with Rel. 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

8.4.6 SAR Measurements with Rel. 8 DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable

8.5 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r05 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluation SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator

8.5.4 Required RB Size and RB offsets for SAR testing

According to FCC KDB 941225 D05v02r05

1. Per sec 4.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - a. The required channel and offset combination with the highest maximum output power is required for SAR.
 - b. When the reported SAR is $\leq 0.8 \text{ W/Kg}$, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - c. When the reported SAR for a required test channel is $> 1.45 \text{ W/kg}$, SAR is required for all RB offset configurations for that channel
2. Per Sec 4.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Sec 4.2.1.
3. Per Sec. 4.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is $< 0.8 \text{ W/kg}$.
4. Per Sec. 4.2.4 and 4.3, SAR test for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sec. 4.2.1 through 4.2.3 is less than or equal to 1/2 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is $< 1.45 \text{ W/Kg}$.

8.5.5 LTE(TDD) Considerations

According to KDB 941225 D05v02r05, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33 %) using Uplink-downlink configuration 0 and Special sub-frame configuration 6.

LTE TDD Band supports 3GPP TS 36.211 section 4.2 for Type 2 Frame and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special sub frame configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration n	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$	$7680 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$	$20480 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-
10	$13168 \cdot T_s$	$13152 \cdot T_s$	$12800 \cdot T_s$	-	-	-

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle – Extended cyclic prefix in uplink x (Ts) x # of S + # of U

Example for calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $(5120 \times [1/(15000 \times 2048)] \times 2 + 0.006)/0.01 = 63.33 \%$

Ts = $1/(15000 \times 2048)$ seconds

8.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

8.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 – 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.6.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is $> 1.2 \text{ W/kg}$. When different maximum output powers is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is $> 1.2 \text{ W/kg}$. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency point requirements.

8.6.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is $\leq 0.4 \text{ W/kg}$, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is $\leq 0.8 \text{ W/kg}$ or all test positions are measured.

8.6.5 2.4 GHz SAR Test Requirement

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following.

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM are additionally evaluated for SAR if highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

8.6.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz band, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel band width, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.6.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output power is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements.

8.6.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.



9. RF Average Conducted Output Power

9.1 GSM Average Conducted Output Power

Maximum Burst-Average Output Power (dB m)										
Band	Channel	GSM	GPRS (GMSK)				EGPRS (8-PSK)			
		Voice	1Tx	2Tx	3Tx	4Tx	1Tx	2Tx	3Tx	4Tx
GSM 850	128	32.45	32.45	31.49	29.51	28.53	25.07	24.09	22.04	20.55
	190	32.52	32.52	31.55	29.56	28.58	25.13	24.00	22.06	20.62
	251	32.79	32.79	31.81	29.84	28.87	25.21	24.30	22.17	20.73
GSM 1900	512	29.48	29.80	28.76	26.74	25.77	24.48	23.28	21.17	19.89
	661	29.91	29.91	28.85	26.83	25.86	24.48	23.29	21.18	19.89
	810	29.88	29.88	28.80	26.78	25.81	24.63	23.45	21.28	19.89

Maximum Frame-Average Output Power (dB m)										
Band	Channel	GSM	GPRS (GMSK)				EGPRS (8-PSK)			
		Voice	1Tx	2Tx	3Tx	4Tx	1Tx	2Tx	3Tx	4Tx
GSM 850	128	23.42	23.42	25.47	25.25	25.52	16.04	18.07	17.78	17.54
	190	23.49	23.49	25.53	25.30	25.57	16.10	17.98	17.80	17.61
	251	23.76	23.76	25.79	25.58	25.86	16.18	18.28	17.91	17.72
GSM 1900	512	20.45	20.77	22.74	22.48	22.76	15.45	17.26	16.91	16.88
	661	20.88	20.88	22.83	22.57	22.85	15.45	17.27	16.92	16.88
	810	20.85	20.85	22.78	22.52	22.80	15.60	17.43	17.02	16.88
GSM 850	Frame Avg, Target	24.77	24.77	26.48	26.24	26.49	17.97	19.98	19.74	19.49
GSM 1900		21.97	21.97	23.98	23.74	23.99	16.97	18.98	18.24	18.49

9.2 GSM Reduced Average Conducted Output Power (Ear-jack, Grip Sensor, Hotspot)

Maximum Burst-Average Output Power (dB m)										
Band	Channel	GSM	GPRS (GMSK)				EGPRS (8-PSK)			
		Voice	1Tx	2Tx	3Tx	4Tx	1Tx	2Tx	3Tx	4Tx
GSM 1900	512	Not Supported	27.53	26.43	24.47	23.47	22.38	21.23	19.06	17.55
	661		27.57	26.46	24.49	23.52	22.33	21.17	18.97	17.63
	810		27.55	26.43	24.43	23.48	22.42	21.27	19.09	17.76

Maximum Frame-Average Output Power (dB m)										
Band	Channel	GSM	GPRS (GMSK)				EGPRS (8-PSK)			
		Voice	1Tx	2Tx	3Tx	4Tx	1Tx	2Tx	3Tx	4Tx
GSM 1900	512	Not Supported	18.50	20.41	20.21	20.46	13.35	15.21	14.80	14.54
	661		18.54	20.44	20.23	20.51	13.30	15.15	14.71	14.62
	810		18.52	20.41	20.17	20.47	13.39	15.25	14.83	14.75
GSM 1900	Frame Avg, Target	-	19.97	21.98	21.74	21.99	14.97	16.98	16.24	16.49

9.3 WCDMA Average Conducted Output Power

Band	Mode	Average Conducted Power (dBm)			MPR [dB]
		Channel			
		9 262	9 400	9 538	
		1 852.4 MHz	1 880.0 MHz	1 907.6 MHz	
WCDMA II	RMC	23.31	23.33	23.47	-
	AMR	23.24	23.30	23.39	-
	HSDPA-Subtest 1	22.28	22.30	22.39	0
	HSDPA-Subtest 2	21.46	21.61	21.50	0
	HSDPA-Subtest 3	20.91	20.75	20.83	0.5
	HSDPA-Subtest 4	20.85	20.84	20.95	0.5
	HSUPA-Subtest 1	21.24	21.27	21.30	0
	HSUPA-Subtest 2	19.29	19.33	19.37	2
	HSUPA-Subtest 3	20.22	20.29	20.34	1
	HSUPA-Subtest 4	19.30	19.33	19.34	2
	HSUPA-Subtest 5	21.26	21.30	21.36	0
	DC-HSDPA-Subtest 1	22.23	22.33	22.40	0
	DC-HSDPA-Subtest 2	22.29	22.36	22.40	0
	DC-HSDPA-Subtest 3	21.80	21.85	21.93	0.5
	DC-HSDPA-Subtest 4	21.83	21.82	21.95	0.5

Band	Mode	Average Conducted Power (dBm)			MPR [dB]
		Channel			
		1 312	1 412	1 513	
		1 712.4 MHz	1 732.4 MHz	1 752.6 MHz	
WCDMA IV	RMC	23.43	23.24	23.31	-
	AMR	23.26	23.15	23.26	-
	HSDPA-Subtest 1	22.26	22.12	22.25	0
	HSDPA-Subtest 2	21.41	21.30	21.40	0
	HSDPA-Subtest 3	20.63	20.52	20.68	0.5
	HSDPA-Subtest 4	20.63	20.70	20.87	0.5
	HSUPA-Subtest 1	21.22	21.11	21.26	0
	HSUPA-Subtest 2	19.27	19.16	19.31	2
	HSUPA-Subtest 3	20.31	20.19	20.31	1
	HSUPA-Subtest 4	19.28	19.16	19.27	2
	HSUPA-Subtest 5	21.26	21.16	21.26	0
	DC-HSDPA-Subtest 1	22.30	22.16	22.29	0
	DC-HSDPA-Subtest 2	22.34	22.20	22.31	0
	DC-HSDPA-Subtest 3	21.81	21.72	21.80	0.5
	DC-HSDPA-Subtest 4	21.82	21.74	21.80	0.5

Band	Mode	Average Conducted Power (dBm)			MPR [dB]
		Channel			
		4 132	4 183	4 233	
		826.4 MHz	836.6 MHz	846.6 MHz	
WCDMA V	RMC	24.34	24.26	24.44	-
	AMR	24.22	24.22	24.38	-
	HSDPA-Subtest 1	23.31	23.30	23.49	0
	HSDPA-Subtest 2	22.48	22.35	22.58	0
	HSDPA-Subtest 3	21.75	21.77	22.14	0.5
	HSDPA-Subtest 4	21.57	21.60	22.06	0.5
	HSUPA-Subtest 1	22.27	22.27	22.46	0
	HSUPA-Subtest 2	20.27	20.28	20.47	2
	HSUPA-Subtest 3	21.30	21.24	21.44	1
	HSUPA-Subtest 4	20.29	20.27	20.44	2
	HSUPA-Subtest 5	22.26	22.28	22.48	0
	DC-HSDPA-Subtest 1	23.37	23.40	23.51	0
	DC-HSDPA-Subtest 2	23.33	23.35	23.55	0
	DC-HSDPA-Subtest 3	22.84	22.85	23.04	0.5
	DC-HSDPA-Subtest 4	22.85	22.84	23.02	0.5

9.4 WCDMA Reduced Average Conducted Output Power (Grip Sensor, Hotspot, Ear-jack)

Band	Mode	Average Conducted Power (dBm)			MPR [dB]
		Channel			
		9 262	9 400	9 538	
		1 852.4 MHz	1 880.0 MHz	1 907.6 MHz	
WCDMA II	RMC	20.44	20.40	20.59	-
	AMR	Not Supported			-
	HSDPA-Subtest 1	19.33	19.27	19.39	0
	HSDPA-Subtest 2	18.56	18.57	18.62	0
	HSDPA-Subtest 3	17.87	17.90	17.96	0.5
	HSDPA-Subtest 4	17.82	17.80	17.87	0.5
	HSUPA-Subtest 1	18.29	18.26	18.37	0
	HSUPA-Subtest 2	16.23	16.27	16.31	2
	HSUPA-Subtest 3	17.29	17.24	17.33	1
	HSUPA-Subtest 4	16.28	16.23	16.32	2
	HSUPA-Subtest 5	18.30	18.28	18.33	0
	DC-HSDPA-Subtest 1	19.29	19.31	19.40	0
	DC-HSDPA-Subtest 2	19.35	19.35	19.42	0
	DC-HSDPA-Subtest 3	18.83	18.80	18.88	0.5
	DC-HSDPA-Subtest 4	18.84	18.83	18.91	0.5

Band	Mode	Average Conducted Power (dBm)			MPR [dB]
		Channel			
		1 312	1 412	1 513	
		1 712.4 MHz	1 732.4 MHz	1 752.6 MHz	
WCDMA IV	RMC	20.30	20.27	20.46	-
	AMR	Not Supported			-
	HSDPA-Subtest 1	19.15	19.12	19.27	0
	HSDPA-Subtest 2	18.40	18.36	18.52	0
	HSDPA-Subtest 3	17.99	17.68	17.84	0.5
	HSDPA-Subtest 4	17.68	17.62	17.78	0.5
	HSUPA-Subtest 1	18.10	18.16	18.25	0
	HSUPA-Subtest 2	16.11	16.17	16.21	2
	HSUPA-Subtest 3	17.09	17.07	17.23	1
	HSUPA-Subtest 4	16.10	16.12	16.20	2
	HSUPA-Subtest 5	18.19	18.08	18.20	0
	DC-HSDPA-Subtest 1	19.13	19.11	19.26	0
	DC-HSDPA-Subtest 2	19.21	19.13	19.29	0
	DC-HSDPA-Subtest 3	18.71	18.64	18.76	0.5
	DC-HSDPA-Subtest 4	18.71	18.60	18.75	0.5

9.5 LTE Average Conducted Output Power

9.5.1 LTE Band 2

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 700	18 900	19 100	
				1 860.0 MHz	1 880.0 MHz	1 900.0 MHz	
20 MHz	QPSK	1	0	23.15	23.17	23.16	0
		1	49	23.39	23.40	23.35	0
		1	99	23.08	23.07	22.86	0
		50	0	21.76	22.10	21.92	1
		50	24	22.08	22.18	22.09	1
		50	50	21.96	22.32	22.13	1
		100	0	22.05	22.31	22.06	1
	16QAM	1	0	22.00	22.46	22.51	1
		1	49	22.25	22.58	22.54	1
		1	99	22.09	22.48	22.42	1
		50	0	21.02	21.31	21.17	2
		50	24	21.28	21.41	21.33	2
		50	50	21.26	21.36	21.20	2
		100	0	21.36	21.34	21.20	2
	64QAM	1	0	20.90	20.91	21.09	2
		1	49	21.10	21.14	21.28	2
		1	99	20.91	20.93	20.96	2
		50	0	19.76	19.80	19.84	3
		50	24	20.00	20.25	19.92	3
		50	50	20.15	20.26	19.79	3
		100	0	20.01	20.18	20.01	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 675	18 900	19 125	
				1 857.5 MHz	1 880.0 MHz	1 902.5 MHz	
15 MHz	QPSK	1	0	23.17	22.85	23.30	0
		1	36	22.92	22.92	23.08	0
		1	74	22.76	22.85	22.74	0
		36	0	21.64	22.16	21.83	1
		36	18	21.76	22.21	21.86	1
		36	37	21.77	22.15	21.78	1
		75	0	21.78	22.12	21.82	1
	16QAM	1	0	22.37	22.25	22.30	1
		1	36	22.48	22.33	22.40	1
		1	74	22.50	22.33	22.23	1
		36	0	20.78	21.26	21.02	2
		36	18	20.90	21.37	21.33	2
		36	37	21.01	21.31	21.23	2
		75	0	21.05	21.31	21.32	2
	64QAM	1	0	20.92	20.96	21.37	2
		1	36	21.07	21.13	21.05	2
		1	74	21.04	20.99	21.00	2
		36	0	19.80	19.86	19.85	3
		36	18	19.92	20.04	19.87	3
		36	37	20.06	20.26	19.84	3
		75	0	19.96	20.20	19.82	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 650	18 900	19 150	
				1 855.0 MHz	1 880.0 MHz	1 905.0 MHz	
10 MHz	QPSK	1	0	23.24	22.90	23.40	0
		1	25	23.31	23.04	22.91	0
		1	49	23.16	22.88	22.87	0
		25	0	21.90	21.92	21.84	1
		25	12	22.19	22.21	21.86	1
		25	25	22.16	22.16	21.80	1
		50	0	21.94	22.33	21.86	1
	16QAM	1	0	21.91	22.75	22.03	1
		1	25	21.98	22.93	22.07	1
		1	49	21.82	22.86	21.99	1
		25	0	21.03	21.34	20.98	2
		25	12	20.94	21.44	21.02	2
		25	25	21.16	21.30	20.90	2
		50	0	21.16	21.39	20.93	2
	64QAM	1	0	21.03	20.97	21.35	2
		1	25	21.01	21.13	21.07	2
		1	49	20.98	20.95	21.02	2
		25	0	19.75	19.84	19.82	3
		25	12	19.92	20.16	19.86	3
		25	25	20.04	20.15	19.81	3
		50	0	20.06	20.22	19.81	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 625	18 900	19 175	
				1 852.5 MHz	1 880.0 MHz	1 907.5 MHz	
5 MHz	QPSK	1	0	23.15	23.06	23.10	0
		1	12	22.79	23.37	23.06	0
		1	24	22.72	23.15	22.79	0
		12	0	21.77	22.08	21.80	1
		12	7	21.81	22.15	21.82	1
		12	13	21.80	22.27	21.71	1
		25	0	21.83	21.99	21.85	1
	16QAM	1	0	22.04	22.04	21.72	1
		1	12	22.19	22.42	21.83	1
		1	24	22.05	22.13	21.71	1
		12	0	20.81	21.28	20.81	2
		12	7	20.87	21.36	20.86	2
		12	13	20.84	21.23	20.78	2
		25	0	21.06	21.38	20.92	2
	64QAM	1	0	20.88	21.33	21.48	2
		1	12	21.13	21.15	21.18	2
		1	24	20.97	21.01	20.97	2
		12	0	19.98	19.90	19.88	3
		12	7	20.30	20.24	19.86	3
		12	13	20.26	20.23	19.84	3
		25	0	20.29	20.23	19.88	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 615	18 900	19 185	
				1 851.5 MHz	1 880.0 MHz	1 908.5 MHz	
3 MHz	QPSK	1	0	22.91	22.78	22.73	0
		1	8	23.00	22.69	22.54	0
		1	14	22.81	22.57	22.58	0
		8	0	21.72	21.90	21.68	1
		8	4	21.67	22.00	21.69	1
		8	7	21.70	22.07	21.62	1
		15	0	21.68	22.06	21.66	1
	16QAM	1	0	22.07	22.13	21.53	1
		1	8	22.11	22.24	21.63	1
		1	14	22.00	21.92	21.59	1
		8	0	20.82	21.01	20.81	2
		8	4	20.89	21.21	20.84	2
		8	7	20.81	21.16	20.69	2
		15	0	20.73	21.18	20.78	2
	64QAM	1	0	20.73	21.07	21.22	2
		1	8	20.84	21.05	21.11	2
		1	14	20.83	20.92	20.84	2
		8	0	19.76	20.01	19.71	3
		8	4	19.84	20.17	19.77	3
		8	7	20.05	20.16	19.84	3
		15	0	20.15	20.11	19.90	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 607	18 900	19 193	
				1 850.7 MHz	1 880.0 MHz	1 909.3 MHz	
1.4 MHz	QPSK	1	0	22.57	22.62	22.56	0
		1	3	22.69	22.62	22.59	0
		1	5	22.63	22.67	22.52	0
		3	0	22.74	22.86	22.72	0
		3	1	22.78	22.87	22.75	0
		3	3	22.74	22.87	22.73	0
		6	0	21.74	22.11	21.78	1
	16QAM	1	0	21.74	21.96	21.65	1
		1	3	21.78	21.86	21.71	1
		1	5	21.68	22.12	21.66	1
		3	0	21.73	22.27	21.96	1
		3	1	21.73	22.35	22.04	1
		3	3	21.79	22.33	22.02	1
		6	0	20.89	21.25	20.89	2
	64QAM	1	0	21.31	21.20	20.94	2
		1	3	21.54	21.18	21.05	2
		1	5	21.33	20.86	20.90	2
		3	0	21.42	21.01	20.92	2
		3	1	21.36	21.00	20.97	2
		3	3	21.18	20.92	20.96	2
		6	0	20.26	20.09	19.83	3

9.5.2 LTE Band 5

Band width	Modulation	RB Size	RB offset	Maximum Average Power	MPR
				20 525	
				836.5 MHz	
10 MHz	QPSK	1	0	24.19	0
		1	25	24.26	0
		1	49	24.32	0
		25	0	23.07	1
		25	12	23.16	1
		25	25	23.35	1
		50	0	23.30	1
	16QAM	1	0	23.27	1
		1	25	23.36	1
		1	49	23.38	1
		25	0	22.15	2
		25	12	22.26	2
		25	25	22.31	2
		50	0	22.14	2
	64QAM	1	0	22.30	2
		1	25	22.41	2
		1	49	22.37	2
		25	0	21.04	3
		25	12	21.16	3
		25	25	21.17	3
		50	0	21.08	3

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				20 425	20 525	20 625	
				826.5 MHz	836.5 MHz	846.5 MHz	
5 MHz	QPSK	1	0	24.13	24.10	24.31	0
		1	12	24.26	24.27	24.44	0
		1	24	24.09	24.11	24.37	0
		12	0	23.09	23.06	23.34	1
		12	7	23.12	23.20	23.35	1
		12	13	23.07	23.14	23.24	1
		25	0	23.08	23.09	23.34	1
	16QAM	1	0	23.00	23.33	23.27	1
		1	12	23.15	23.53	23.47	1
		1	24	23.00	23.35	23.32	1
		12	0	22.11	22.12	22.30	2
		12	7	22.12	22.28	22.33	2
		12	13	22.08	22.17	22.24	2
		25	0	22.16	22.11	22.45	2
	64QAM	1	0	22.30	22.31	22.41	2
		1	12	22.39	22.36	22.57	2
		1	24	22.29	22.31	22.45	2
		12	0	21.13	21.05	21.32	3
		12	7	21.16	21.18	21.36	3
		12	13	21.14	21.11	21.28	3
		25	0	21.15	21.09	21.37	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				20 407	20 525	20 643	
				824.7 MHz	836.5 MHz	848.3 MHz	
3 MHz	QPSK	1	0	23.84	23.73	23.99	0
		1	8	23.93	23.94	24.15	0
		1	14	23.78	23.85	24.09	0
		8	0	23.00	23.06	23.31	1
		8	4	23.02	23.07	23.31	1
		8	7	22.90	23.04	23.27	1
		15	0	22.95	23.02	23.21	1
	16QAM	1	0	22.91	22.83	23.59	1
		1	8	23.02	22.96	23.63	1
		1	14	22.91	22.90	23.52	1
		8	0	22.04	22.13	22.40	2
		8	4	22.07	22.13	22.47	2
		8	7	21.96	22.11	22.45	2
		15	0	22.02	22.04	22.27	2
	64QAM	1	0	22.11	22.11	22.27	2
		1	8	22.23	22.24	22.39	2
		1	14	22.18	22.19	22.33	2
		8	0	21.07	21.03	21.25	3
		8	4	21.12	21.10	21.32	3
		8	7	21.05	21.06	21.30	3
		15	0	21.01	20.98	21.25	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				20 407	20 525	20 643	
				824.7 MHz	836.5 MHz	848.3 MHz	
1.4 MHz	QPSK	1	0	23.91	23.98	24.11	0
		1	3	23.95	24.11	24.27	0
		1	5	23.92	24.02	24.13	0
		3	0	23.99	24.07	24.30	0
		3	1	23.99	24.09	24.32	0
		3	3	23.98	24.11	24.29	0
		6	0	23.06	23.10	23.35	1
	16QAM	1	0	22.91	23.04	23.19	1
		1	3	23.00	23.19	23.26	1
		1	5	22.95	23.11	23.21	1
		3	0	23.26	23.03	23.38	1
		3	1	23.28	23.02	23.40	1
		3	3	23.29	23.09	23.36	1
		6	0	22.14	22.21	22.32	2
	64QAM	1	0	22.20	22.19	22.41	2
		1	3	22.34	22.39	22.52	2
		1	5	22.27	22.27	22.50	2
		3	0	22.27	22.22	22.48	2
		3	1	22.25	22.32	22.52	2
		3	3	22.25	22.29	22.51	2
		6	0	21.14	21.14	21.36	3

9.5.3 LTE Band 12

Band width	Modulation	RB Size	RB offset	Maximum Average Power	MPR
				23 095	
				707.5 MHz	
10 MHz	QPSK	1	0	23.55	0
		1	25	23.67	0
		1	49	23.77	0
		25	0	22.47	1
		25	12	22.70	1
		25	25	22.79	1
		50	0	22.73	1
	16QAM	1	0	22.63	1
		1	25	22.80	1
		1	49	22.71	1
		25	0	21.63	2
		25	12	21.81	2
		25	25	21.89	2
		50	0	21.70	2
	64QAM	1	0	21.91	2
		1	25	22.05	2
		1	49	22.02	2
		25	0	20.65	3
		25	12	20.81	3
		25	25	20.90	3
		50	0	20.79	3

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				23 035	23 095	23 155	
				701.5 MHz	707.5 MHz	713.5 MHz	
5 MHz	QPSK	1	0	23.55	23.51	23.65	0
		1	12	23.67	23.71	23.84	0
		1	24	23.63	23.63	23.75	0
		12	0	22.49	22.55	22.67	1
		12	7	22.57	22.69	22.83	1
		12	13	22.54	22.71	22.69	1
		25	0	22.53	22.66	22.70	1
	16QAM	1	0	22.36	22.85	22.69	1
		1	12	22.53	23.06	22.86	1
		1	24	22.52	22.99	22.80	1
		12	0	21.51	21.64	21.68	2
		12	7	21.61	21.74	21.75	2
		12	13	21.54	21.79	21.63	2
		25	0	21.61	21.69	21.86	2
	64QAM	1	0	21.76	21.84	21.93	2
		1	12	21.93	22.02	21.98	2
		1	24	21.87	21.85	21.92	2
		12	0	20.61	20.69	20.78	3
		12	7	20.67	20.81	20.85	3
		12	13	20.58	20.84	20.75	3
		25	0	20.62	20.79	20.78	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				23 025	23 095	23 655	
				700.5 MHz	707.5 MHz	714.5 MHz	
3 MHz	QPSK	1	0	23.18	23.28	23.44	0
		1	8	23.25	23.42	23.50	0
		1	14	23.19	23.32	23.47	0
		8	0	22.44	22.55	22.70	1
		8	4	22.43	22.58	22.69	1
		8	7	22.42	22.56	22.60	1
		15	0	22.38	22.57	22.62	1
	16QAM	1	0	22.18	22.91	22.59	1
		1	8	22.31	23.00	22.68	1
		1	14	22.29	22.89	22.62	1
		8	0	21.54	21.72	21.67	2
		8	4	21.55	21.80	21.67	2
		8	7	21.50	21.77	21.63	2
		15	0	21.42	21.59	21.67	2
	64QAM	1	0	21.61	21.65	21.75	2
		1	8	21.67	21.80	21.85	2
		1	14	21.59	21.79	21.83	2
		8	0	20.53	20.62	20.74	3
		8	4	20.54	20.73	20.77	3
		8	7	20.49	20.68	20.71	3
		15	0	20.45	20.65	20.67	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				23 017	23 095	23 173	
				699.7 MHz	707.5 MHz	715.3 MHz	
1.4 MHz	QPSK	1	0	23.21	23.44	23.55	0
		1	3	23.33	23.45	23.63	0
		1	5	23.24	23.41	23.62	0
		3	0	23.38	23.55	23.66	0
		3	1	23.43	23.53	23.69	0
		3	3	23.42	23.53	23.71	0
		6	0	22.48	22.57	22.67	1
	16QAM	1	0	22.33	22.49	22.65	1
		1	3	22.41	22.53	22.77	1
		1	5	22.37	22.42	22.68	1
		3	0	22.54	22.78	22.63	1
		3	1	22.53	22.79	22.67	1
		3	3	22.53	22.85	22.65	1
		6	0	21.43	21.66	21.77	2
	64QAM	1	0	21.63	21.85	21.89	2
		1	3	21.66	21.85	21.95	2
		1	5	21.68	21.81	21.92	2
		3	0	21.64	21.84	21.90	2
		3	1	21.68	21.86	21.95	2
		3	3	21.65	21.81	21.91	2
		6	0	20.52	20.72	20.76	3

9.5.4 LTE Band 13

Band width	Modulation	RB Size	RB offset	Maximum Average Power	MPR
				23 230	
				782.0 MHz	
10 MHz	QPSK	1	0	23.45	0
		1	25	23.44	0
		1	49	23.39	0
		25	0	22.40	1
		25	12	22.49	1
		25	25	22.35	1
		50	0	22.40	1
	16QAM	1	0	22.53	1
		1	25	22.53	1
		1	49	22.45	1
		25	0	21.51	2
		25	12	21.56	2
		25	25	21.49	2
		50	0	21.49	2
	64QAM	1	0	21.68	2
		1	25	21.69	2
		1	49	21.61	2
		25	0	20.36	3
		25	12	20.46	3
		25	25	20.35	3
		50	0	20.34	3

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

Band width	Modulation	RB Size	RB offset	Maximum Average Power	MPR
				23 035	
				701.5 MHz	
5 MHz	QPSK	1	0	23.51	0
		1	12	23.58	0
		1	24	23.45	0
		12	0	22.44	1
		12	7	22.44	1
		12	13	22.39	1
		25	0	22.39	1
	16QAM	1	0	22.31	1
		1	12	22.44	1
		1	24	22.24	1
		12	0	21.38	2
		12	7	21.47	2
		12	13	21.39	2
		25	0	21.44	2
	64QAM	1	0	21.53	2
		1	12	21.61	2
		1	24	21.51	2
		12	0	20.39	3
		12	7	20.45	3
		12	13	20.37	3
		25	0	20.39	3

9.5.5 LTE Band 26

Band width	Modulation	RB Size	RB offset	Maximum Average Power	MPR
				26 865	
				831.5 MHz	
15 MHz	QPSK	1	0	23.62	0
		1	36	23.81	0
		1	74	23.67	0
		36	0	22.59	1
		36	18	22.80	1
		36	37	22.68	1
		75	0	22.68	1
	16QAM	1	0	22.74	1
		1	36	22.78	1
		1	74	22.76	1
		36	0	21.68	2
		36	18	21.65	2
		36	37	21.75	2
		75	0	21.68	2
	64QAM	1	0	21.85	2
		1	36	21.90	2
		1	74	21.86	2
		36	0	20.65	3
		36	18	20.67	3
		36	37	20.73	3
		75	0	20.68	3

15 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				26 740	26 865	26 990	
				819.0 MHz	831.5 MHz	844.0 MHz	
10 MHz	QPSK	1	0	23.59	23.63	23.68	0
		1	25	23.64	23.72	23.82	0
		1	49	23.61	23.66	23.39	0
		25	0	22.54	22.59	22.69	1
		25	12	22.64	22.68	22.79	1
		25	25	22.61	22.68	22.52	1
		50	0	22.60	22.61	22.64	1
	16QAM	1	0	23.21	22.78	22.70	1
		1	25	23.21	22.84	22.82	1
		1	49	23.17	22.77	22.50	1
		25	0	21.54	21.70	21.80	2
		25	12	21.74	21.79	21.78	2
		25	25	21.61	21.78	21.61	2
		50	0	21.58	21.68	21.71	2
	64QAM	1	0	21.88	21.89	21.90	2
		1	25	21.89	21.93	22.02	2
		1	49	21.80	21.85	21.67	2
		25	0	20.52	20.61	20.77	3
		25	12	20.68	20.67	20.82	3
		25	25	20.58	20.66	20.57	3
		50	0	20.55	20.62	20.66	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				26 715	26 865	27 015	
				816.5 MHz	831.5 MHz	846.5 MHz	
5 MHz	QPSK	1	0	23.65	23.55	23.70	0
		1	12	23.80	23.72	23.74	0
		1	24	23.63	23.58	23.43	0
		12	0	22.57	22.56	22.73	1
		12	7	22.70	22.67	22.61	1
		12	13	22.57	22.61	22.47	1
		25	0	22.62	22.65	22.60	1
	16QAM	1	0	22.53	22.85	22.79	1
		1	12	22.69	23.02	22.75	1
		1	24	22.54	22.86	22.43	1
		12	0	21.55	21.64	21.69	2
		12	7	21.66	21.67	21.63	2
		12	13	21.60	21.66	21.42	2
		25	0	21.69	21.65	21.68	2
	64QAM	1	0	21.87	21.78	21.84	2
		1	12	21.92	21.86	21.89	2
		1	24	21.67	21.76	21.61	2
		12	0	20.57	20.61	20.70	3
		12	7	20.68	20.68	20.64	3
		12	13	20.64	20.64	20.50	3
		25	0	20.61	20.61	20.60	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				26 705	26 865	27 025	
				815.5 MHz	831.5 MHz	847.5 MHz	
3 MHz	QPSK	1	0	23.28	23.35	23.33	0
		1	8	23.42	23.45	23.31	0
		1	14	23.22	23.33	23.12	0
		8	0	22.61	22.52	22.49	1
		8	4	22.60	22.55	22.48	1
		8	7	22.56	22.50	22.38	1
		15	0	22.56	22.49	22.42	1
	16QAM	1	0	23.03	22.44	22.29	1
		1	8	22.99	22.52	22.36	1
		1	14	22.81	22.44	22.20	1
		8	0	21.79	21.54	21.59	2
		8	4	21.74	21.58	21.53	2
		8	7	21.77	21.48	21.42	2
		15	0	21.55	21.58	21.44	2
	64QAM	1	0	21.61	21.61	21.56	2
		1	8	21.80	21.77	21.65	2
		1	14	21.56	21.62	21.37	2
		8	0	20.57	20.55	20.55	3
		8	4	20.63	20.58	20.52	3
		8	7	20.55	20.55	20.39	3
		15	0	20.53	20.52	20.45	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				26 697	26 865	27 033	
				814.7 MHz	831.5 MHz	848.3 MHz	
1.4 MHz	QPSK	1	0	23.40	23.47	23.27	0
		1	3	23.49	23.51	23.35	0
		1	5	23.44	23.39	23.22	0
		3	0	23.51	23.53	23.44	0
		3	1	23.55	23.54	23.44	0
		3	3	23.54	23.57	23.43	0
		6	0	22.59	22.57	22.46	1
	16QAM	1	0	22.45	22.55	22.42	1
		1	3	22.53	22.67	22.40	1
		1	5	22.48	22.57	22.29	1
		3	0	22.75	22.53	22.54	1
		3	1	22.79	22.55	22.54	1
		3	3	22.79	22.59	22.51	1
		6	0	21.66	21.70	21.40	2
	64QAM	1	0	21.74	21.80	21.58	2
		1	3	21.87	21.85	21.76	2
		1	5	21.70	21.70	21.59	2
		3	0	21.74	21.76	21.70	2
		3	1	21.79	21.82	21.72	2
		3	3	21.76	21.75	21.62	2
		6	0	20.64	20.60	20.52	3

9.5.6 LTE Band 41

Band width	Modulation	RB Size	RB offset	Maximum Average Power					MPR
				39 750	40 185	40 620	41 055	41 490	
				2 506.0 MHz	2 549.5 MHz	2 593.0 MHz	2 636.5 MHz	2 680.0 MHz	
20 MHz	QPSK	1	0	22.52	22.39	22.51	22.44	22.51	0
		1	49	22.67	22.60	22.65	22.63	22.65	0
		1	99	22.45	22.39	22.44	22.45	22.31	0
		50	0	21.54	21.40	21.46	21.54	21.61	1
		50	24	21.65	21.61	21.62	21.59	21.64	1
		50	50	21.51	21.56	21.60	21.54	21.44	1
		100	0	21.60	21.51	21.58	21.54	21.53	1
	16QAM	1	0	21.55	21.17	21.07	21.50	21.35	1
		1	49	21.72	21.35	21.16	21.67	21.35	1
		1	99	21.47	21.18	21.04	21.48	21.05	1
		50	0	20.54	20.40	20.47	20.56	20.57	2
		50	24	20.67	20.57	20.64	20.64	20.66	2
		50	50	20.52	20.53	20.65	20.60	20.43	2
		100	0	20.53	20.48	20.55	20.56	20.49	2
	64QAM	1	0	20.05	20.07	20.09	20.00	20.02	2
		1	49	20.23	20.29	20.26	20.20	20.04	2
		1	99	20.06	20.07	20.02	20.04	20.04	2
		50	0	19.48	19.40	19.41	19.36	19.45	3
		50	24	19.57	19.56	19.49	19.44	19.46	3
		50	50	19.47	19.52	19.46	19.38	19.31	3
		100	0	19.49	19.54	19.52	19.41	19.44	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power					MPR
				39 750	40 185	40 620	41 055	41 490	
				2 506.0 MHz	2 549.5 MHz	2 593.0 MHz	2 636.5 MHz	2 680.0 MHz	
15 MHz	QPSK	1	0	22.63	22.51	22.49	22.55	22.68	0
		1	36	22.69	22.61	22.57	22.65	22.67	0
		1	74	22.58	22.50	22.46	22.58	22.51	0
		36	0	21.55	21.44	21.55	21.53	21.64	1
		36	18	21.58	21.53	21.63	21.62	21.66	1
		36	37	21.53	21.52	21.55	21.55	21.56	1
		75	0	21.56	21.53	21.61	21.61	21.68	1
	16QAM	1	0	21.77	21.41	21.36	21.68	21.58	1
		1	36	21.87	21.54	21.49	21.77	21.57	1
		1	74	21.73	21.42	21.27	21.67	21.41	1
		36	0	20.58	20.48	20.49	20.53	20.64	2
		36	18	20.62	20.54	20.61	20.64	20.60	2
		36	37	20.58	20.54	20.53	20.56	20.55	2
		75	0	20.54	20.49	20.56	20.53	20.57	2
	64QAM	1	0	20.17	20.19	20.25	20.14	20.22	2
		1	36	20.23	20.27	20.36	20.21	20.30	2
		1	74	20.14	20.23	20.19	20.18	20.14	2
		36	0	19.49	19.47	19.54	19.47	19.58	3
		36	18	19.51	19.54	19.61	19.50	19.56	3
		36	37	19.45	19.54	19.53	19.42	19.51	3
		75	0	19.52	19.51	19.54	19.51	19.51	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power					MPR
				39 750	40 185	40 620	41 055	41 490	
				2 506.0 MHz	2 549.5 MHz	2 593.0 MHz	2 636.5 MHz	2 680.0 MHz	
10 MHz	QPSK	1	0	22.65	22.57	22.61	22.58	22.65	0
		1	25	22.65	22.59	22.64	22.65	22.61	0
		1	49	22.63	22.55	22.67	22.63	22.57	0
		25	0	21.55	21.46	21.51	21.53	21.63	1
		25	12	21.63	21.59	21.60	21.60	21.61	1
		25	25	21.59	21.56	21.62	21.54	21.53	1
		50	0	21.62	21.57	21.63	21.58	21.61	1
	16QAM	1	0	21.62	21.26	21.75	21.51	21.33	1
		1	25	21.61	21.27	21.77	21.55	21.36	1
		1	49	21.56	21.30	21.75	21.49	21.25	1
		25	0	20.55	20.47	20.52	20.50	20.68	2
		25	12	20.62	20.60	20.63	20.54	20.70	2
		25	25	20.55	20.58	20.63	20.52	20.53	2
		50	0	20.59	20.57	20.57	20.54	20.62	2
	64QAM	1	0	20.20	20.25	20.28	20.19	20.28	2
		1	25	20.25	20.26	20.29	20.20	20.22	2
		1	49	20.17	20.24	20.22	20.19	20.18	2
		25	0	19.55	19.57	19.56	19.52	19.61	3
		25	12	19.62	19.64	19.66	19.59	19.63	3
		25	25	19.52	19.61	19.64	19.55	19.56	3
		50	0	19.57	19.49	19.52	19.46	19.48	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power					MPR
				39 750	40 185	40 620	41 055	41 490	
				2 506.0 MHz	2 549.5 MHz	2 593.0 MHz	2 636.5 MHz	2 680.0 MHz	
5 MHz	QPSK	1	0	22.59	22.50	22.49	22.53	22.54	0
		1	12	22.74	22.58	22.65	22.73	22.63	0
		1	24	22.59	22.51	22.49	22.55	22.54	0
		12	0	21.55	21.47	21.54	21.48	21.60	1
		12	7	21.61	21.53	21.60	21.56	21.64	1
		12	13	21.56	21.53	21.56	21.55	21.57	1
		25	0	21.58	21.51	21.57	21.57	21.63	1
	16QAM	1	0	21.92	21.50	21.62	21.79	21.57	1
		1	12	22.05	21.63	21.76	21.96	21.69	1
		1	24	21.87	21.52	21.63	21.81	21.59	1
		12	0	20.53	20.44	20.54	20.49	20.57	2
		12	7	20.58	20.50	20.60	20.45	20.56	2
		12	13	20.54	20.46	20.56	20.49	20.53	2
		25	0	20.64	20.54	20.52	20.57	20.64	2
	64QAM	1	0	20.12	20.15	20.18	20.10	20.14	2
		1	12	20.22	20.18	20.32	20.24	20.30	2
		1	24	20.10	20.16	20.17	20.09	20.14	2
		12	0	19.52	19.50	19.53	19.47	19.55	3
		12	7	19.58	19.59	19.57	19.57	19.59	3
		12	13	19.52	19.54	19.57	19.50	19.53	3
		25	0	19.55	19.59	19.58	19.52	19.54	3

9.5.7 LTE Band 66

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				132 072	132 322	132 572	
				1 720.0 MHz	1 745.0 MHz	1 770.0 MHz	
20 MHz	QPSK	1	0	23.55	23.49	23.57	0
		1	49	23.80	23.72	23.81	0
		1	99	23.43	23.55	23.52	0
		50	0	22.62	22.60	22.77	1
		50	24	22.74	22.74	22.83	1
		50	50	22.69	22.75	22.74	1
		100	0	22.70	22.66	22.76	1
	16QAM	1	0	22.89	22.69	23.23	1
		1	49	23.02	22.98	23.37	1
		1	99	22.72	22.82	23.11	1
		50	0	21.58	21.54	21.76	2
		50	24	21.71	21.74	21.76	2
		50	50	21.61	21.76	21.71	2
		100	0	21.63	21.69	21.74	2
	64QAM	1	0	21.14	21.11	21.42	2
		1	49	21.46	21.56	21.57	2
		1	99	21.26	21.50	21.46	2
		50	0	20.11	20.10	20.34	3
		50	24	20.25	20.27	20.40	3
		50	50	20.26	20.37	20.35	3
		100	0	20.21	20.19	20.35	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				132 047	132 322	132 597	
				1 717.5 MHz	1 745.0 MHz	1 772.5 MHz	
15 MHz	QPSK	1	0	23.64	23.62	23.74	0
		1	36	23.73	23.76	23.78	0
		1	74	23.54	23.68	23.68	0
		36	0	22.70	22.61	22.71	1
		36	18	22.75	22.67	22.80	1
		36	37	22.63	22.71	22.73	1
		75	0	22.70	22.65	22.74	1
	16QAM	1	0	23.19	22.71	23.12	1
		1	36	23.31	22.82	23.20	1
		1	74	23.15	22.79	22.99	1
		36	0	21.61	21.61	21.71	2
		36	18	21.65	21.67	21.76	2
		36	37	21.61	21.68	21.71	2
		75	0	21.60	21.61	21.74	2
	64QAM	1	0	21.35	21.32	21.42	2
		1	36	21.43	21.48	21.66	2
		1	74	21.33	21.56	21.54	2
		36	0	20.16	20.16	20.28	3
		36	18	20.24	20.28	20.40	3
		36	37	20.23	20.38	20.36	3
		75	0	20.20	20.47	20.30	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				132 022	132 322	132 622	
				1 715.0 MHz	1 745.0 MHz	1 775.0 MHz	
10 MHz	QPSK	1	0	23.67	23.66	23.73	0
		1	25	23.64	23.78	23.75	0
		1	49	23.65	23.77	23.70	0
		25	0	22.56	22.59	22.74	1
		25	12	22.71	22.79	22.85	1
		25	25	22.67	22.71	22.69	1
		50	0	22.69	22.71	22.78	1
	16QAM	1	0	22.67	23.19	22.90	1
		1	25	22.68	23.31	22.92	1
		1	49	22.63	23.32	22.86	1
		25	0	21.68	21.66	21.83	2
		25	12	21.75	21.75	21.86	2
		25	25	21.71	21.79	21.78	2
		50	0	21.69	21.67	21.74	2
	64QAM	1	0	21.41	21.39	21.55	2
		1	25	21.43	21.55	21.57	2
		1	49	21.48	21.64	21.53	2
		25	0	20.14	20.15	20.33	3
		25	12	20.24	20.29	20.40	3
		25	25	20.24	20.30	20.35	3
		50	0	20.20	20.20	20.37	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				131 997	132 322	132 647	
				1 712.5 MHz	1 745.0 MHz	1 777.5 MHz	
5 MHz	QPSK	1	0	23.69	23.66	23.70	0
		1	12	23.79	23.77	23.80	0
		1	24	23.64	23.71	23.66	0
		12	0	22.62	22.66	22.71	1
		12	7	22.70	22.74	22.77	1
		12	13	22.64	22.67	22.70	1
		25	0	22.68	22.70	22.76	1
	16QAM	1	0	22.48	22.85	22.69	1
		1	12	22.59	23.05	22.82	1
		1	24	22.49	22.92	22.68	1
		12	0	21.52	21.65	21.67	2
		12	7	21.63	21.68	21.76	2
		12	13	21.57	21.71	21.63	2
		25	0	21.66	21.67	21.77	2
	64QAM	1	0	21.37	21.33	21.47	2
		1	12	21.47	21.52	21.53	2
		1	24	21.36	21.48	21.41	2
		12	0	20.15	20.19	20.31	3
		12	7	20.28	20.29	20.38	3
		12	13	20.22	20.31	20.32	3
		25	0	20.19	20.36	20.32	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				131 987	132 322	132 657	
				1 711.5 MHz	1 745.0 MHz	1 778.5 MHz	
3 MHz	QPSK	1	0	23.01	23.18	23.60	0
		1	8	23.14	23.32	23.37	0
		1	14	23.02	23.15	23.04	0
		8	0	22.12	22.18	22.60	1
		8	4	22.54	22.32	22.66	1
		8	7	22.16	22.48	22.62	1
		15	0	22.38	22.44	22.55	1
	16QAM	1	0	22.33	22.92	22.48	1
		1	8	22.44	22.99	22.58	1
		1	14	22.32	22.88	22.53	1
		8	0	21.61	21.70	21.60	2
		8	4	21.64	21.74	21.70	2
		8	7	21.59	21.74	21.57	2
		15	0	21.48	21.56	21.65	2
	64QAM	1	0	21.12	21.14	21.28	2
		1	8	21.23	21.35	21.42	2
		1	14	21.23	21.28	21.36	2
		8	0	20.11	20.13	20.23	3
		8	4	20.18	20.23	20.30	3
		8	7	20.14	20.20	20.23	3
		15	0	20.09	20.11	20.19	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				131 979	132 322	132 665	
				1 710.7 MHz	1 745.0 MHz	1 779.3 MHz	
1.4 MHz	QPSK	1	0	23.04	23.01	23.16	0
		1	3	23.11	23.10	23.22	0
		1	5	23.01	23.00	23.14	0
		3	0	23.07	23.08	23.15	0
		3	1	23.11	23.12	23.19	0
		3	3	23.12	23.11	23.13	0
		6	0	22.20	22.13	22.17	1
	16QAM	1	0	22.44	22.42	22.62	1
		1	3	22.54	22.49	22.64	1
		1	5	22.49	22.44	22.59	1
		3	0	22.60	22.70	22.57	1
		3	1	22.60	22.72	22.55	1
		3	3	22.63	22.80	22.64	1
		6	0	21.52	21.66	21.67	2
	64QAM	1	0	21.80	21.35	21.48	2
		1	3	21.85	21.34	21.49	2
		1	5	21.22	21.36	21.39	2
		3	0	21.28	21.31	21.36	2
		3	1	21.32	21.33	21.46	2
		3	3	21.29	21.30	21.38	2
		6	0	20.17	20.17	20.28	3

9.6 LTE Reduced Average Conducted Output Power(Grip Sensor, Hotspot, Ear-jack)

9.6.1 LTE Band 2

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 700	18 900	19 100	
				1 860.0 MHz	1 880.0 MHz	1 900.0 MHz	
20 MHz	QPSK	1	0	20.05	20.05	20.11	0
		1	49	20.31	20.29	20.33	0
		1	99	20.13	20.13	20.17	0
		50	0	20.05	20.11	20.27	0
		50	24	20.24	20.23	20.30	0
		50	50	20.26	20.23	20.23	0
		100	0	20.19	20.15	20.23	0
	16QAM	1	0	20.40	20.31	20.42	0
		1	49	20.69	20.68	20.61	0
		1	99	20.40	20.43	20.45	0
		50	0	20.13	20.13	20.29	0
		50	24	20.29	20.27	20.33	0
		50	50	20.30	20.24	20.28	0
		100	0	20.19	20.17	20.26	0
	64QAM	1	0	20.39	20.43	20.42	0
		1	49	20.54	20.63	20.58	0
		1	99	20.41	20.46	20.42	0
		50	0	20.21	20.25	20.40	0
		50	24	20.37	20.36	20.43	0
		50	50	20.41	20.37	20.35	0
		100	0	20.28	20.27	20.36	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 675	18 900	19 125	
				1 857.5 MHz	1 880.0 MHz	1 902.5 MHz	
15 MHz	QPSK	1	0	20.14	20.14	20.14	0
		1	36	20.30	20.28	20.36	0
		1	74	20.23	20.20	20.22	0
		36	0	20.12	20.12	20.23	0
		36	18	20.19	20.21	20.24	0
		36	37	20.23	20.17	20.23	0
		75	0	20.19	20.17	20.25	0
	16QAM	1	0	20.49	20.44	20.40	0
		1	36	20.53	20.65	20.64	0
		1	74	20.62	20.57	20.47	0
		36	0	20.20	20.15	20.25	0
		36	18	20.25	20.25	20.28	0
		36	37	20.27	20.22	20.28	0
		75	0	20.23	20.21	20.27	0
	64QAM	1	0	20.52	20.37	20.43	0
		1	36	20.68	20.49	20.61	0
		1	74	20.56	20.43	20.55	0
		36	0	20.30	20.28	20.40	0
		36	18	20.39	20.39	20.44	0
		36	37	20.42	20.33	20.39	0
		75	0	20.32	20.29	20.37	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 650	18 900	19 150	
				1 855.0 MHz	1 880.0 MHz	1 905.0 MHz	
10 MHz	QPSK	1	0	20.23	20.21	20.27	0
		1	25	20.29	20.29	20.35	0
		1	49	20.24	20.23	20.25	0
		25	0	20.11	20.12	20.23	0
		25	12	20.24	20.22	20.27	0
		25	25	20.23	20.15	20.20	0
		50	0	20.20	20.16	20.24	0
	16QAM	1	0	20.47	20.50	20.65	0
		1	25	20.63	20.52	20.67	0
		1	49	20.50	20.59	20.65	0
		25	0	20.17	20.15	20.29	0
		25	12	20.31	20.27	20.33	0
		25	25	20.31	20.21	20.28	0
		50	0	20.23	20.20	20.29	0
	64QAM	1	0	20.51	20.45	20.58	0
		1	25	20.68	20.57	20.62	0
		1	49	20.53	20.56	20.55	0
		25	0	20.30	20.25	20.39	0
		25	12	20.42	20.37	20.42	0
		25	25	20.41	20.31	20.38	0
		50	0	20.34	20.31	20.39	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 625	18 900	19 175	
				1 852.5 MHz	1 880.0 MHz	1 907.5 MHz	
5 MHz	QPSK	1	0	20.14	20.14	20.15	0
		1	12	20.24	20.28	20.28	0
		1	24	20.14	20.14	20.15	0
		12	0	20.16	20.16	20.21	0
		12	7	20.24	20.20	20.24	0
		12	13	20.20	20.17	20.15	0
		25	0	20.19	20.14	20.22	0
	16QAM	1	0	20.40	20.34	20.41	0
		1	12	20.66	20.63	20.65	0
		1	24	20.47	20.44	20.55	0
		12	0	20.20	20.17	20.26	0
		12	7	20.26	20.25	20.27	0
		12	13	20.24	20.20	20.19	0
		25	0	20.29	20.21	20.27	0
	64QAM	1	0	20.22	20.41	20.56	0
		1	12	20.53	20.50	20.56	0
		1	24	20.17	20.43	20.48	0
		12	0	20.19	20.31	20.41	0
		12	7	20.30	20.36	20.45	0
		12	13	20.35	20.29	20.36	0
		25	0	20.38	20.33	20.42	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 615	18 900	19 185	
				1 851.5 MHz	1 880.0 MHz	1 908.5 MHz	
3 MHz	QPSK	1	0	19.86	19.86	19.87	0
		1	8	20.00	19.99	20.01	0
		1	14	19.84	19.85	19.93	0
		8	0	20.09	20.05	20.10	0
		8	4	20.17	20.14	20.17	0
		8	7	20.09	20.08	20.11	0
		15	0	20.09	20.06	20.11	0
	16QAM	1	0	20.12	20.18	20.19	0
		1	8	20.31	20.19	20.28	0
		1	14	20.08	20.22	20.17	0
		8	0	20.22	20.11	20.19	0
		8	4	20.26	20.23	20.25	0
		8	7	20.21	20.18	20.22	0
		15	0	20.13	20.11	20.15	0
	64QAM	1	0	20.00	20.10	20.34	0
		1	8	20.05	20.35	20.39	0
		1	14	19.94	20.24	20.39	0
		8	0	19.99	20.22	20.25	0
		8	4	19.91	20.32	20.08	0
		8	7	19.96	20.26	20.07	0
		15	0	20.04	20.21	19.95	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 607	18 900	19 193	
				1 850.7 MHz	1 880.0 MHz	1 909.3 MHz	
1.4 MHz	QPSK	1	0	19.99	19.99	20.04	0
		1	3	20.10	20.12	20.14	0
		1	5	20.00	19.97	20.04	0
		3	0	20.12	20.07	20.10	0
		3	1	20.13	20.10	20.15	0
		3	3	20.13	20.09	20.11	0
		6	0	20.19	20.20	20.24	0
	16QAM	1	0	20.37	20.34	20.46	0
		1	3	20.31	20.38	20.48	0
		1	5	20.38	20.35	20.44	0
		3	0	20.17	20.07	20.17	0
		3	1	20.13	20.14	20.14	0
		3	3	20.08	20.14	20.17	0
		6	0	20.31	20.32	20.36	0
	64QAM	1	0	20.42	20.31	20.01	0
		1	3	20.61	20.30	20.13	0
		1	5	20.38	20.15	20.08	0
		3	0	20.43	20.19	20.03	0
		3	1	20.40	20.26	20.01	0
		3	3	20.27	20.22	19.97	0
		6	0	20.08	20.21	19.88	0

9.5.2 LTE Band 5(Only Grip Sensor)

Band width	Modulation	RB Size	RB offset	Maximum Average Power	MPR
				20 525	
				836.5 MHz	
10 MHz	QPSK	1	0	20.05	0
		1	25	20.15	0
		1	49	20.27	0
		25	0	19.86	1
		25	12	20.19	1
		25	25	20.03	1
		50	0	20.15	1
	16QAM	1	0	20.26	1
		1	25	20.44	1
		1	49	20.43	1
		25	0	19.93	2
		25	12	20.06	2
		25	25	20.07	2
		50	0	19.97	2
	64QAM	1	0	20.22	2
		1	25	20.33	2
		1	49	20.35	2
		25	0	19.97	3
		25	12	20.14	3
		25	25	20.13	3
		50	0	20.05	3

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				20 425	20 525	20 625	
				826.5 MHz	836.5 MHz	846.5 MHz	
5 MHz	QPSK	1	0	19.94	19.95	20.10	0
		1	12	20.05	20.10	20.25	0
		1	24	19.93	19.96	20.14	0
		12	0	19.98	19.92	20.18	1
		12	7	19.99	20.09	20.20	1
		12	13	19.94	20.03	20.16	1
		25	0	19.96	19.96	20.22	1
	16QAM	1	0	20.33	20.14	20.31	1
		1	12	20.49	20.35	20.62	1
		1	24	20.26	20.18	20.33	1
		12	0	20.01	19.93	20.21	2
		12	7	20.02	20.06	20.20	2
		12	13	19.99	20.03	20.15	2
		25	0	20.03	20.02	20.24	2
	64QAM	1	0	20.22	20.19	20.33	2
		1	12	20.31	20.30	20.55	2
		1	24	20.15	20.18	20.32	2
		12	0	20.09	20.01	20.29	3
		12	7	20.13	20.15	20.29	3
		12	13	20.06	20.10	20.25	3
		25	0	20.06	20.06	20.31	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				20 407	20 525	20 643	
				824.7 MHz	836.5 MHz	848.3 MHz	
3 MHz	QPSK	1	0	19.72	19.66	19.91	0
		1	8	19.79	19.83	20.01	0
		1	14	19.72	19.73	19.93	0
		8	0	19.92	19.90	20.15	1
		8	4	19.94	19.97	20.16	1
		8	7	19.89	19.94	20.15	1
		15	0	19.87	19.89	20.13	1
	16QAM	1	0	19.90	20.01	20.09	1
		1	8	20.13	20.17	20.22	1
		1	14	20.07	20.02	20.22	1
		8	0	19.99	19.98	20.21	2
		8	4	20.02	20.03	20.25	2
		8	7	19.95	19.99	20.20	2
		15	0	19.91	19.94	20.13	2
	64QAM	1	0	20.06	20.03	20.17	2
		1	8	20.09	20.15	20.36	2
		1	14	20.11	20.08	20.21	2
		8	0	19.97	20.00	20.19	3
		8	4	20.05	20.07	20.24	3
		8	7	19.99	20.02	20.17	3
		15	0	19.96	19.92	20.18	3

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				20 407	20 525	20 643	
				824.7 MHz	836.5 MHz	848.3 MHz	
1.4 MHz	QPSK	1	0	19.88	19.86	20.06	0
		1	3	19.92	19.96	20.14	0
		1	5	19.82	19.86	20.06	0
		3	0	19.93	19.97	20.17	0
		3	1	19.97	19.97	20.19	0
		3	3	19.92	19.99	20.17	0
		6	0	20.02	20.04	20.27	1
	16QAM	1	0	20.17	20.14	20.34	1
		1	3	20.32	20.29	20.50	1
		1	5	20.08	20.17	20.34	1
		3	0	20.00	19.99	20.24	1
		3	1	19.95	19.94	20.24	1
		3	3	20.00	20.02	20.23	1
		6	0	20.16	20.14	20.39	2
	64QAM	1	0	20.15	20.17	20.46	2
		1	3	20.19	20.19	20.41	2
		1	5	20.09	20.13	20.38	2
		3	0	20.17	20.19	20.38	2
		3	1	20.18	20.17	20.39	2
		3	3	20.18	20.21	20.43	2
		6	0	20.10	20.09	20.29	3

9.6.3 LTE Band 41

Band width	Modulation	RB Size	RB offset	Maximum Average Power					MPR
				39 750	40 185	40 620	41 055	41 490	
				2 506.0 MHz	2 549.5 MHz	2 593.0 MHz	2 636.5 MHz	2 680.0 MHz	
20 MHz	QPSK	1	0	21.54	21.49	21.59	21.48	21.61	0
		1	49	21.68	21.66	21.72	21.61	21.66	0
		1	99	21.48	21.47	21.52	21.49	21.39	0
		50	0	21.50	21.45	21.54	21.50	21.62	0
		50	24	21.60	21.60	21.67	21.60	21.63	0
		50	50	21.48	21.59	21.64	21.55	21.49	0
		100	0	21.49	21.53	21.62	21.54	21.58	0
	16QAM	1	0	21.68	21.64	21.72	21.61	21.72	0
		1	49	21.83	21.82	21.86	21.76	21.80	0
		1	99	21.62	21.65	21.65	21.63	21.52	0
		50	0	20.53	20.48	20.59	20.55	20.64	0
		50	24	20.63	20.65	20.71	20.64	20.68	0
		50	50	20.51	20.62	20.69	20.60	20.52	0
		100	0	20.50	20.55	20.63	20.54	20.58	0
	64QAM	1	0	20.17	20.16	20.21	20.16	20.30	0
		1	49	20.33	20.36	20.46	20.31	20.40	0
		1	99	20.13	20.16	20.16	20.17	20.07	0
		50	0	19.57	19.45	19.50	19.51	19.58	0
		50	24	19.69	19.63	19.64	19.56	19.60	0
		50	50	19.50	19.57	19.63	19.54	19.45	0
		100	0	19.55	19.55	19.61	19.58	19.57	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power					MPR
				39 750	40 185	40 620	41 055	41 490	
				2 506.0 MHz	2 549.5 MHz	2 593.0 MHz	2 636.5 MHz	2 680.0 MHz	
15 MHz	QPSK	1	0	21.53	21.52	21.56	21.48	21.58	0
		1	36	21.61	21.61	21.68	21.57	21.62	0
		1	74	21.54	21.55	21.56	21.50	21.48	0
		36	0	21.46	21.43	21.50	21.43	21.53	0
		36	18	21.50	21.51	21.56	21.49	21.53	0
		36	37	21.45	21.50	21.55	21.44	21.48	0
		75	0	21.48	21.49	21.56	21.47	21.49	0
	16QAM	1	0	21.72	21.68	21.74	21.62	21.74	0
		1	36	21.79	21.77	21.84	21.71	21.76	0
		1	74	21.68	21.67	21.71	21.65	21.61	0
		36	0	20.47	20.42	20.48	20.43	20.52	0
		36	18	20.53	20.51	20.56	20.47	20.53	0
		36	37	20.46	20.50	20.56	20.44	20.48	0
		75	0	20.50	20.51	20.59	20.49	20.53	0
	64QAM	1	0	20.23	20.24	20.32	20.18	20.32	0
		1	36	20.31	20.35	20.39	20.30	20.38	0
		1	74	20.26	20.27	20.28	20.22	20.24	0
		36	0	19.57	19.50	19.61	19.45	19.64	0
		36	18	19.58	19.57	19.69	19.58	19.66	0
		36	37	19.55	19.59	19.67	19.53	19.61	0
		75	0	19.58	19.55	19.61	19.52	19.54	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power					MPR
				39 750	40 185	40 620	41 055	41 490	
				2 506.0 MHz	2 549.5 MHz	2 593.0 MHz	2 636.5 MHz	2 680.0 MHz	
10 MHz	QPSK	1	0	21.58	21.58	21.63	21.54	21.63	0
		1	25	21.61	21.60	21.64	21.59	21.62	0
		1	49	21.56	21.57	21.61	21.55	21.52	0
		25	0	21.48	21.45	21.53	21.44	21.55	0
		25	12	21.50	21.53	21.60	21.51	21.56	0
		25	25	21.46	21.52	21.59	21.49	21.49	0
		50	0	21.50	21.51	21.57	21.50	21.53	0
		50	0	21.50	21.51	21.57	21.50	21.53	0
	16QAM	1	0	21.76	21.75	21.75	21.68	21.77	0
		1	25	21.78	21.75	21.81	21.74	21.76	0
		1	49	21.74	21.73	21.76	21.71	21.66	0
		25	0	20.52	20.52	20.55	20.51	20.60	0
		25	12	20.57	20.56	20.63	20.58	20.61	0
		25	25	20.51	20.56	20.64	20.52	20.52	0
		50	0	20.54	20.55	20.63	20.53	20.57	0
		50	0	20.54	20.55	20.63	20.53	20.57	0
	64QAM	1	0	20.31	20.33	20.34	20.27	20.34	0
		1	25	20.32	20.35	20.38	20.34	20.37	0
		1	49	20.30	20.30	20.31	20.29	20.27	0
		25	0	19.64	19.63	19.64	19.60	19.70	0
		25	12	19.70	19.72	19.73	19.64	19.73	0
		25	25	19.62	19.68	19.68	19.64	19.61	0
		50	0	19.62	19.60	19.60	19.56	19.54	0
		50	0	19.62	19.60	19.60	19.56	19.54	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power					MPR
				39 750	40 185	40 620	41 055	41 490	
				2 506.0 MHz	2 549.5 MHz	2 593.0 MHz	2 636.5 MHz	2 680.0 MHz	
5 MHz	QPSK	1	0	21.51	21.50	21.54	21.43	21.50	0
		1	12	21.63	21.64	21.66	21.62	21.64	0
		1	24	21.48	21.51	21.51	21.44	21.48	0
		12	0	21.48	21.47	21.51	21.42	21.49	0
		12	7	21.50	21.54	21.59	21.50	21.53	0
		12	13	21.44	21.50	21.55	21.45	21.46	0
		25	0	21.47	21.49	21.54	21.45	21.48	0
		25	0	21.47	21.49	21.54	21.45	21.48	0
	16QAM	1	0	21.65	21.63	21.67	21.56	21.62	0
		1	12	21.79	21.77	21.78	21.73	21.73	0
		1	24	21.63	21.66	21.65	21.58	21.60	0
		12	0	20.49	20.50	20.53	20.46	20.51	0
		12	7	20.53	20.55	20.60	20.54	20.55	0
		12	13	20.47	20.50	20.57	20.46	20.49	0
		25	0	20.53	20.53	20.59	20.53	20.56	0
		25	0	20.53	20.53	20.59	20.53	20.56	0
	64QAM	1	0	20.19	20.23	20.25	20.18	20.23	0
		1	12	20.31	20.35	20.38	20.34	20.38	0
		1	24	20.18	20.21	20.24	20.17	20.18	0
		12	0	19.58	19.57	19.62	19.57	19.65	0
		12	7	19.63	19.68	19.71	19.62	19.70	0
		12	13	19.62	19.63	19.66	19.61	19.61	0
		25	0	19.66	19.67	19.69	19.63	19.64	0
		25	0	19.66	19.67	19.69	19.63	19.64	0

9.6.4 LTE Band 66

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				132 072	132 322	132 572	
				1 720.0 MHz	1 745.0 MHz	1 770.0 MHz	
20 MHz	QPSK	1	0	20.04	19.90	20.20	0
		1	49	20.14	20.34	20.35	0
		1	99	20.10	20.34	20.30	0
		50	0	20.13	20.09	20.35	0
		50	24	20.27	20.27	20.39	0
		50	50	20.24	20.35	20.34	0
		100	0	19.98	20.23	20.32	0
	16QAM	1	0	20.14	20.38	20.58	0
		1	49	20.33	20.63	20.69	0
		1	99	20.07	20.64	20.57	0
		50	0	19.99	20.09	20.36	0
		50	24	20.23	20.33	20.43	0
		50	50	20.22	20.42	20.35	0
		100	0	20.17	20.23	20.17	0
	64QAM	1	0	20.16	20.21	20.47	0
		1	49	20.55	20.58	20.64	0
		1	99	20.35	20.57	20.51	0
		50	0	20.17	20.13	20.37	0
		50	24	20.29	20.33	20.42	0
		50	50	20.30	20.42	20.38	0
		100	0	20.22	20.27	20.37	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				132 047	132 322	132 597	
				1 717.5 MHz	1 745.0 MHz	1 772.5 MHz	
15 MHz	QPSK	1	0	20.19	20.11	20.28	0
		1	36	20.25	20.35	20.40	0
		1	74	20.18	20.35	20.34	0
		36	0	20.15	20.14	20.27	0
		36	18	20.21	20.25	20.39	0
		36	37	20.20	20.31	20.34	0
		75	0	20.22	20.10	20.34	0
	16QAM	1	0	20.39	20.45	20.65	0
		1	36	20.52	20.70	20.79	0
		1	74	20.45	20.71	20.65	0
		36	0	19.99	20.18	20.28	0
		36	18	20.19	20.31	20.40	0
		36	37	20.25	20.32	20.37	0
		75	0	20.24	20.21	20.38	0
	64QAM	1	0	20.29	20.27	20.50	0
		1	36	20.45	20.58	20.65	0
		1	74	20.42	20.55	20.53	0
		36	0	20.19	20.20	20.33	0
		36	18	20.29	20.34	20.41	0
		36	37	20.27	20.38	20.40	0
		75	0	20.24	20.24	20.33	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				132 022	132 322	132 622	
				1 715.0 MHz	1 745.0 MHz	1 775.0 MHz	
10 MHz	QPSK	1	0	20.20	20.19	20.35	0
		1	25	20.25	20.37	20.39	0
		1	49	20.20	20.38	20.38	0
		25	0	20.07	20.13	20.36	0
		25	12	20.25	20.26	20.39	0
		25	25	20.22	20.29	20.32	0
		50	0	20.22	20.25	20.36	0
	16QAM	1	0	20.56	20.49	20.54	0
		1	25	20.66	20.75	20.63	0
		1	49	20.51	20.74	20.66	0
		25	0	20.09	20.19	20.40	0
		25	12	20.28	20.33	20.43	0
		25	25	20.26	20.33	20.36	0
		50	0	20.15	20.26	20.33	0
	64QAM	1	0	20.41	20.37	20.48	0
		1	25	20.45	20.52	20.61	0
		1	49	20.50	20.61	20.52	0
		25	0	20.17	20.18	20.38	0
		25	12	20.30	20.32	20.45	0
		25	25	20.28	20.37	20.36	0
		50	0	20.24	20.24	20.39	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				131 997	132 322	132 647	
				1 712.5 MHz	1 745.0 MHz	1 777.5 MHz	
5 MHz	QPSK	1	0	20.14	20.05	20.25	0
		1	12	20.28	20.33	20.39	0
		1	24	20.17	20.24	20.31	0
		12	0	20.16	20.18	20.27	0
		12	7	20.25	20.25	20.37	0
		12	13	20.20	20.27	20.25	0
		25	0	20.19	20.23	20.31	0
	16QAM	1	0	20.36	20.45	20.51	0
		1	12	20.38	20.59	20.74	0
		1	24	20.05	20.50	20.47	0
		12	0	19.74	20.19	20.32	0
		12	7	19.86	20.29	20.39	0
		12	13	19.82	20.29	20.33	0
		25	0	19.98	20.28	20.36	0
	64QAM	1	0	20.36	20.36	20.45	0
		1	12	20.45	20.59	20.62	0
		1	24	20.30	20.44	20.46	0
		12	0	20.21	20.25	20.33	0
		12	7	20.29	20.31	20.41	0
		12	13	20.27	20.32	20.36	0
		25	0	20.25	20.28	20.38	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				131 987	132 322	132 657	
				1 711.5 MHz	1 745.0 MHz	1 778.5 MHz	
3 MHz	QPSK	1	0	19.90	19.88	19.99	0
		1	8	20.00	20.06	20.11	0
		1	14	19.90	19.93	20.01	0
		8	0	20.10	20.11	20.21	0
		8	4	20.18	20.17	20.29	0
		8	7	20.13	20.18	20.22	0
		15	0	20.07	20.12	20.20	0
	16QAM	1	0	20.13	20.28	20.36	0
		1	8	20.15	20.27	20.44	0
		1	14	20.06	20.28	20.30	0
		8	0	20.15	20.18	20.32	0
		8	4	20.23	20.28	20.38	0
		8	7	20.16	20.24	20.32	0
		15	0	20.10	20.18	20.24	0
	64QAM	1	0	20.15	20.20	20.32	0
		1	8	20.23	20.40	20.45	0
		1	14	20.16	20.24	20.34	0
		8	0	20.17	20.21	20.27	0
		8	4	20.22	20.29	20.34	0
		8	7	20.18	20.26	20.27	0
		15	0	20.11	20.15	20.25	0


Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				131 979	132 322	132 665	
				1 710.7 MHz	1 745.0 MHz	1 779.3 MHz	
1.4 MHz	QPSK	1	0	19.97	19.98	20.11	0
		1	3	20.00	20.11	20.13	0
		1	5	19.97	20.03	20.10	0
		3	0	20.08	20.07	20.19	0
		3	1	20.08	20.11	20.17	0
		3	3	20.09	20.13	20.21	0
		6	0	20.19	20.18	20.30	0
	16QAM	1	0	20.22	20.26	20.39	0
		1	3	20.24	20.36	20.31	0
		1	5	20.32	20.26	20.48	0
		3	0	20.06	20.08	20.16	0
		3	1	20.10	20.15	20.22	0
		3	3	20.04	20.17	19.97	0
		6	0	20.29	20.32	20.41	0
	64QAM	1	0	20.24	20.33	20.37	0
		1	3	20.32	20.39	20.50	0
		1	5	20.24	20.39	20.34	0
		3	0	20.29	20.32	20.45	0
		3	1	20.36	20.32	20.43	0
		3	3	20.32	20.41	20.41	0
		6	0	20.22	20.23	20.31	0

9.7 WLAN & Bluetooth Average Conducted Output Power

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.

Power Measurement Setup

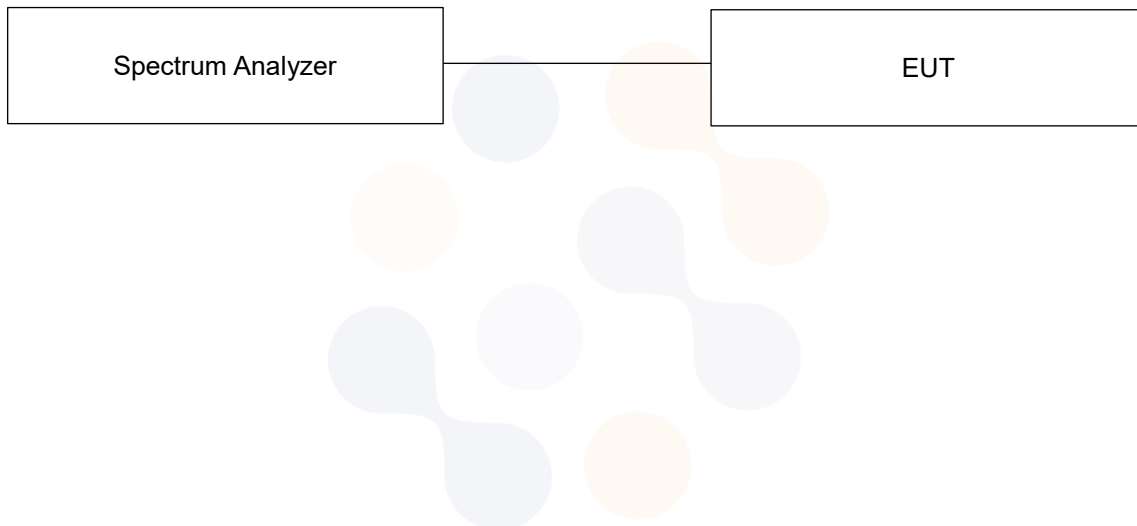

9.7.1 WLAN Average Conducted Output Power

Band	Freq. [MHz]	Channel	Mode		
			802.11b	802.11g	802.11n
WLAN 2.4 GHz	2 412.0	1	17.62	15.89	15.32
	2 437.0	6	18.21	16.26	16.13
	2 462.0	11	17.80	15.78	14.89
	2 467.0	12	7.87	7.58	7.50
	2 472.0	13	7.69	7.52	7.37
Band	Freq. [MHz]	Channel	Mode		
			802.11a	802.11n	802.11ac
NII (20 MHz)	5 180.0	36	15.01	14.51	14.35
	5 200.0	40	14.32	14.33	14.25
	5 220.0	44	14.51	14.39	14.19
	5 240.0	48	14.57	14.51	14.44
	5 260.0	52	14.75	14.62	14.51
	5 280.0	56	15.52	14.89	14.78
	5 300.0	60	15.29	15.09	14.94
	5 320.0	64	15.19	15.13	14.96
	5 500.0	100	15.08	14.95	14.81
	5 600.0	120	15.23	15.18	15.02
	5 620.0	124	15.22	15.16	15.00
	5 720.0	144	15.12	15.05	14.97
	5 745.0	149	15.00	14.66	14.54
	5 785.0	157	15.02	14.62	14.48
	5 825.0	165	14.82	14.48	14.36
Band	Freq. [MHz]	Channel	Mode		
			802.11n	802.11ac	
NII (40 MHz)	5 190.0	38	13.34	13.25	
	5 230.0	46	13.31	13.71	
	5 270.0	54	14.11	13.63	
	5 310.0	62	14.39	14.46	
	5 510.0	102	14.31	14.31	
	5 590.0	118	14.44	13.97	
	5 630.0	126	14.18	14.15	
	5 710.0	142	14.05	14.10	
	5 755.0	151	13.90	14.51	
	5 795.0	159	14.38	14.40	
Band	Freq. [MHz]	Channel	Mode		
			802.11ac		
NII (80 MHz)	5 210.0	42	12.04		
	5 290.0	58	12.72		
	5 530.0	106	12.57		
	5 610.0	122	13.09		
	5 690.0	138	12.99		
	5 775.0	155	13.43		

9.7.2 WLAN Reduced Average Conducted Output Power(RCV)

Band	Freq. [MHz]	Channel	Mode		
			802.11b	802.11g	802.11n
WLAN 2.4 GHz	2 412.0	1	12.89	12.72	12.58
	2 437.0	6	13.45	13.27	13.18
	2 462.0	11	12.84	12.80	12.69
	2 467.0	12	7.87	7.58	7.50
	2 472.0	13	7.69	7.52	7.37
Band	Freq. [MHz]	Channel	Mode		
			802.11a	802.11n	802.11ac
NII (20 MHz)	5 180.0	36	9.95	10.15	9.47
	5 200.0	40	10.21	9.38	9.45
	5 220.0	44	9.98	9.31	9.32
	5 240.0	48	10.07	10.02	10.14
	5 260.0	52	9.94	9.66	9.67
	5 280.0	56	10.67	9.98	9.97
	5 300.0	60	10.12	10.05	10.00
	5 320.0	64	10.86	10.71	10.10
	5 500.0	100	10.10	9.87	9.87
	5 600.0	120	10.20	10.56	10.02
	5 620.0	124	10.30	10.82	10.14
	5 720.0	144	10.46	10.10	10.07
	5 745.0	149	10.04	9.63	9.67
	5 785.0	157	10.16	10.34	9.59
	5 825.0	165	9.84	10.14	9.50
Band	Freq. [MHz]	Channel	Mode		
			802.11n	802.11ac	
NII (40 MHz)	5 190.0	38	9.64	9.60	
	5 230.0	46	9.61	9.71	
	5 270.0	54	9.85	10.53	
	5 310.0	62	10.29	10.26	
	5 510.0	102	10.25	10.08	
	5 590.0	118	10.79	10.16	
	5 630.0	126	10.42	10.43	
	5 710.0	142	10.88	10.25	
	5 755.0	151	10.09	10.27	
	5 795.0	159	10.82	10.07	
Band	Freq. [MHz]	Channel	Mode		
			802.11ac		
NII (80 MHz)	5 210.0	42	10.09		
	5 290.0	58	9.96		
	5 530.0	106	9.75		
	5 610.0	122	10.16		
	5 690.0	138	10.15		
	5 775.0	155	10.23		


9.8 Bluetooth Average Conducted Output Power

Mode	Freq. [MHz]	Channel	Conducted Powers (dBm)
BDR_DH5 (1 Mbps)	2 402.0	0	14.15
	2 441.0	39	15.04
	2 480.0	78	14.54
EDR_2-DH5 (2 Mbps)	2 402.0	0	11.63
	2 441.0	39	12.03
	2 480.0	78	11.57
EDR_3-DH5 (3 Mbps)	2 402.0	0	11.58
	2 441.0	39	11.99
	2 480.0	78	11.52
LE (1 Mbps 37)	2 402.0	0	4.74
	2 440.0	19	4.68
	2 480.0	39	5.37
LE (1 Mbps 255)	2 402.0	0	4.70
	2 440.0	19	4.61
	2 480.0	39	5.29
LE (2 Mbps 37)	2 402.0	0	4.77
	2 440.0	19	4.74
	2 480.0	39	5.43
LE (2 Mbps 255)	2 402.0	0	4.71
	2 440.0	19	4.64
	2 480.0	39	5.31

9.9 Wireless Band Duty Cycle

Wireless Bands	Frequency Bands	Mode	Duty Cycle (%)
GSM	850 1900	Voice, GPRS(GMSK), EGPRS(8PSK)	Voice: 12.5
			(E)GPRS 1Tx : 12.5
			(E)GPRS 2Tx : 25.0
			(E)GPRS 3Tx : 37.5
			(E)GPRS 4Tx : 50.0
WCDMA	Band II	RMC, AMR, HSDPA, HSUPA,DC-HSDPA	100
	Band IV		
	Band V		
LTE	FDD Band 2	QPSK, 16QAM, 64QAM	100
	FDD Band 5		
	FDD Band 12		
	FDD Band 13		
	FDD Band 26		
	FDD Band 66		
	TDD Band 41		63.33
WLAN	2.4 GHz	802.11b	99.5
	NII	802.11a	96.8
		802.11ac(VHT80)	88.0

Wireless Bands	Frequency Bands		Mode		Duty Cycle	
	Mode	Packet	On Time (ms)	On-Off Time (ms)	Duty Cycle (%)	Duty Cycle Compensate Factor
Bluetooth	BDR(GFSK)	DH5	2.88	3.75	76.8	1.302

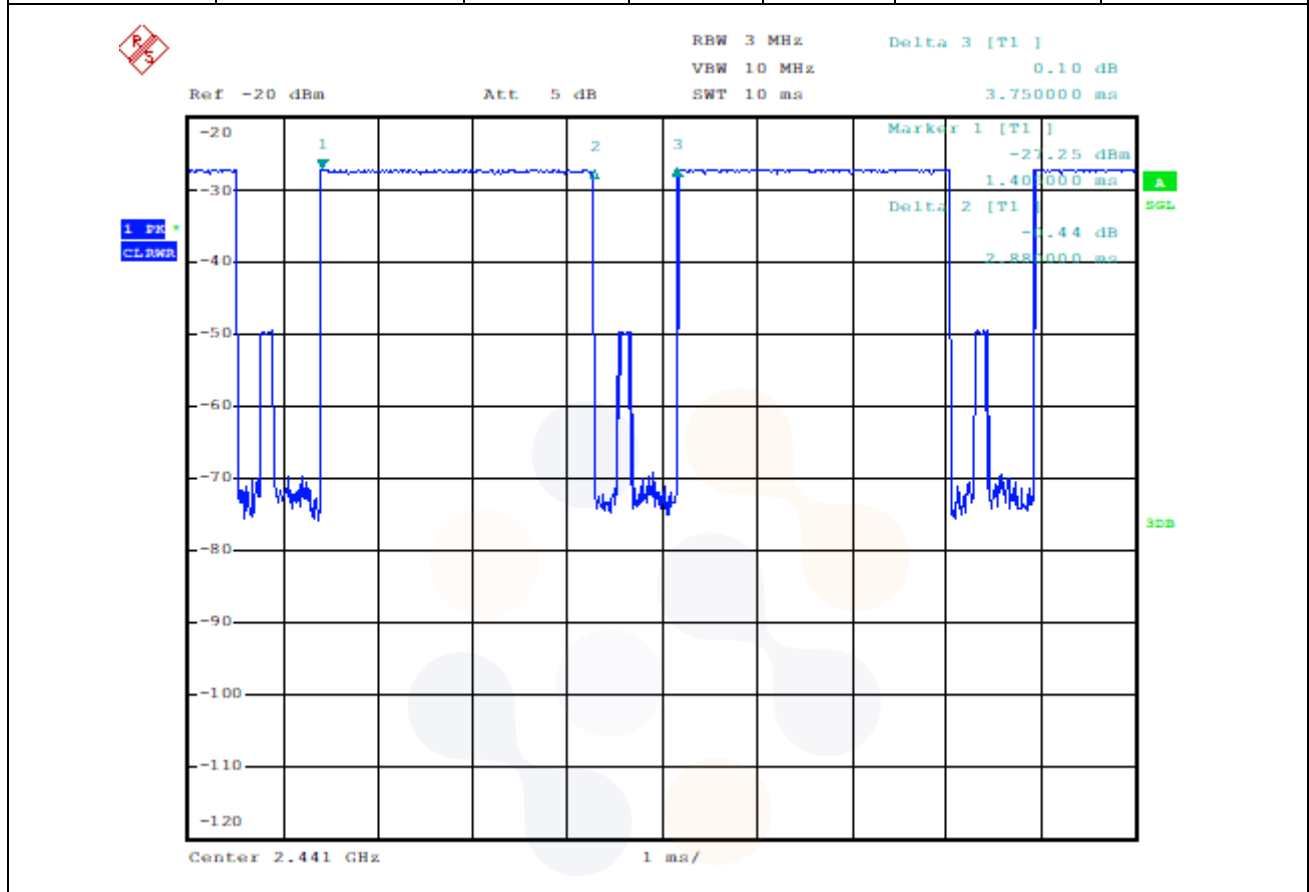

10. System Verification

10.1 Tissue Verification

The dielectric properties for this Tissue Simulant Liquids were measured by using the SPEAG Model DAK3.5 Dielectric Probe in conjunction with Agilent E5071B Network Analyzer (300 kHz – 8 500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in Table 1. For the SAR measurement given in this report. The temperature variation of the Tissue Simulant Liquids was $(22 \pm 2) ^\circ\text{C}$.


Freq. (MHz)	Limit/Measured		Permittivity (ρ)	Conductivity (σ)	Temp. ($^\circ\text{C}$)
13.0	Recommended Limit		$55.00 \pm 5 \%$ (52.25 ~ 57.75)	$0.75 \pm 5 \%$ (0.71 ~ 0.79)	22 ± 2
	Measured	2023-01-13	54.70	0.72	20.77
750.0	Recommended Limit		$41.90 \pm 5 \%$ (39.81 ~ 44.00)	$0.89 \pm 5 \%$ (0.85 ~ 0.93)	22 ± 2
	Measured	2023-01-14	42.29	0.86	20.83
		2023-01-16	42.13	0.87	20.88
850.0	Recommended Limit		$41.50 \pm 5 \%$ (39.43 ~ 43.58)	$0.92 \pm 5 \%$ (0.87 ~ 0.97)	22 ± 2
	Measured	2023-01-11	42.53	0.91	20.67
		2023-01-12	41.82	0.90	20.77
		2023-01-13	42.13	0.88	20.95
1 750.0	Recommended Limit		$40.07 \pm 5 \%$ (38.07 ~ 42.07)	$1.37 \pm 5 \%$ (1.30 ~ 1.44)	22 ± 2
	Measured	2023-01-09	38.45	1.34	20.95
		2023-01-10	38.48	1.35	20.78
1 900.0	Recommended Limit		$40.00 \pm 5 \%$ (38.00 ~ 42.00)	$1.40 \pm 5 \%$ (1.33 ~ 1.47)	22 ± 2
	Measured	2023-01-05	40.07	1.37	20.93
		2023-01-06	40.10	1.38	20.89
2 450.0	Recommended Limit		$39.20 \pm 5 \%$ (37.24 ~ 41.16)	$1.80 \pm 5 \%$ (1.71 ~ 1.89)	22 ± 2
	Measured	2023-01-09	38.11	1.80	20.93
2 600.0	Recommended Limit		$39.00 \pm 5 \%$ (37.05 ~ 40.95)	$1.96 \pm 5 \%$ (1.86 ~ 2.06)	22 ± 2
	Measured	2023-01-14	38.69	1.96	20.79
5 250.0	Recommended Limit		$35.90 \pm 5 \%$ (34.15 ~ 37.75)	$4.71 \pm 5 \%$ (4.47 ~ 4.95)	22 ± 2
	Measured	2023-01-10	35.00	4.69	20.81
		2023-01-14	36.07	4.57	20.83
5 600.0	Recommended Limit		$35.50 \pm 5 \%$ (33.73~37.28)	$5.07 \pm 5 \%$ (4.82~5.32)	22 ± 2
	Measured	2023-01-11	34.36	4.99	20.90
		2023-01-14	35.48	4.90	20.83
5 800.0	Recommended Limit		$35.30 \pm 5 \%$ (33.54~37.07)	$5.27 \pm 5 \%$ (5.01~5.53)	22 ± 2
	Measured	2023-01-12	33.84	5.18	20.97
		2023-01-14	35.14	5.10	20.83

<Table 1. Measurement result Tissue electric parameters>

10.2 Test System Verification

The microwave circuit arrangement for system verification is sketched below picture.

The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the Table 2. During the tests, the ambient temperature of the laboratory was in the range $(22 \pm 2) ^\circ\text{C}$, the relative humidity was in the range $(50 \pm 20)\%$ and the liquid depth Above the ear/grid reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

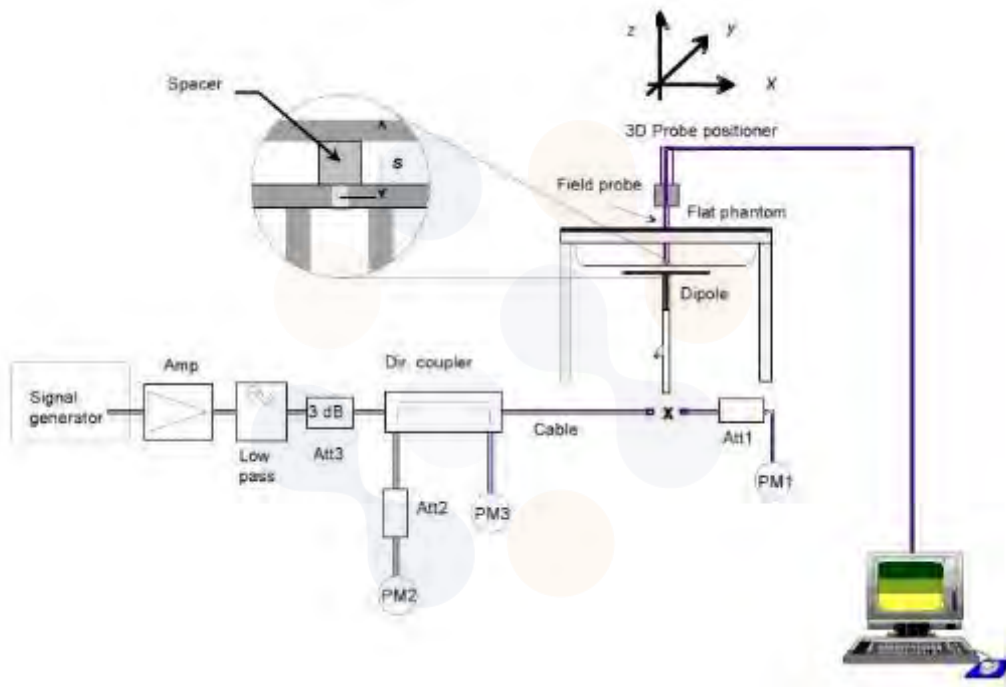

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0003 Page (69) of (323)	
--	---	---

Verification Kit	Probe S/N	Frequency (MHz)	Tissue Type	Limit/Measured (Normalized to 1 W)	
CLA13 SN: 1019	EX3DV4 SN: 3928	13.0	HSL	Recommended Limit 10g (Normalized)	0.36 ± 10 % (0.32~0.39)
				Measured 2023-01-13	0.36
D750V3 SN: 1183	EX3DV4 SN: 7540	750.0	HSL	Recommended Limit 1g (Normalized)	8.36 ± 10 % (7.52~9.20)
				Measured 2023-01-14	8.48
				Measured 2023-01-16	8.72
D850V2 SN: 1006	EX3DV4 SN: 7540	850.0	HSL	Recommended Limit 1g (Normalized)	10.10 ± 10 % (9.09~11.11)
				Measured 2023-01-11	10.44
				Measured 2023-01-12	10.12
D1750V2 SN: 1072	EX3DV4 SN: 7540	1 750.0	HSL	Recommended Limit 1g (Normalized)	36.50 ± 10 % (32.85~40.15)
				Measured 2023-01-09	36.92
				Measured 2023-01-10	38.28
D1900V2 SN: 5d160	EX3DV4 SN: 7540	1 900.0	HSL	Recommended Limit 1g (Normalized)	39.60 ± 10 % (35.64~43.56)
				Measured 2023-01-05	40.40
				Measured 2023-01-06	39.68
D2450V2 SN: 895	EX3DV4 SN: 3928	2 450.0	HSL	Recommended Limit 1g (Normalized)	52.40 ± 10 % (47.16 ~ 57.64)
				Measured 2023-01-09	53.20
D2600V2 SN: 1050	EX3DV4 SN: 7770	2 600.0	HSL	Recommended Limit 1g (Normalized)	56.70 ± 10 % (51.03 ~ 62.37)
				Measured 2023-01-14	55.70
D5GHzV2 SN: 1134	EX3DV4 SN: 3928	5 250.0	HSL	Recommended Limit 1g (Normalized)	81.40 ± 10 % (73.26~89.54)
				Measured 2023-01-10	79.00
				Measured 2023-01-14	80.30
				Recommended Limit 10g (Normalized)	23.20 ± 10 % (20.88~25.52)
		5 600.0	HSL	Measured 2023-01-10	22.50
				Measured 2023-01-14	22.80
				Recommended Limit 1g (Normalized)	84.50 ± 10 % (76.05~92.95)
				Measured 2023-01-11	85.30
				Measured 2023-01-14	84.40
				Recommended Limit 10g (Normalized)	23.90 ± 10 % (21.51~26.29)
		5 800.0	HSL	Measured 2023-01-11	24.30
				Measured 2023-01-14	24.00
				Recommended Limit 1g (Normalized)	82.60 ± 10 % (74.34~90.86)
				Measured 2023-01-12	79.30
				Measured 2023-01-14	80.70

<Table 2. System Verification Result>

11. SAR Test Results

11.1 Standalone Head SAR Test Results

GSM 850 Band									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
Voice	Right Cheek	0	836.6	32.52	33.80	1.343	0.222	0.298	
	Right Tilt	0	836.6	32.52	33.80	1.343	0.122	0.164	
	Left Cheek	0	836.6	32.52	33.80	1.343	0.194	0.261	
	Left Tilt	0	836.6	32.52	33.80	1.343	0.107	0.144	
GPRS 4Tx	Right Cheek	0	836.6	28.58	29.50	1.236	0.322	0.398	1
	Right Tilt	0	836.6	28.58	29.50	1.236	0.178	0.220	
	Left Cheek	0	836.6	28.58	29.50	1.236	0.271	0.335	
	Left Tilt	0	836.6	28.58	29.50	1.236	0.149	0.184	

GSM 1900 Band									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
Voice	Right Cheek	0	1 880.0	29.91	31.00	1.285	0.082	0.105	
	Right Tilt	0	1 880.0	29.91	31.00	1.285	0.063	0.081	
	Left Cheek	0	1 880.0	29.91	31.00	1.285	0.131	0.168	
	Left Tilt	0	1 880.0	29.91	31.00	1.285	0.075	0.096	
GPRS 4Tx	Right Cheek	0	1 880.0	25.86	27.00	1.300	0.103	0.134	
	Right Tilt	0	1 880.0	25.86	27.00	1.300	0.109	0.142	
	Left Cheek	0	1 880.0	25.86	27.00	1.300	0.192	0.250	2
	Left Tilt	0	1 880.0	25.86	27.00	1.300	0.093	0.121	

WCDMA Band II									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
RMC	Right Cheek	0	1 880.0	23.33	24.50	1.309	0.165	0.216	
	Right Tilt	0	1 880.0	23.33	24.50	1.309	0.127	0.166	
	Left Cheek	0	1 880.0	23.33	24.50	1.309	0.219	0.287	3
	Left Tilt	0	1 880.0	23.33	24.50	1.309	0.127	0.166	

WCDMA Band IV									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
RMC	Right Cheek	0	1 732.4	23.24	24.50	1.337	0.172	0.230	4
	Right Tilt	0	1 732.4	23.24	24.50	1.337	0.127	0.170	
	Left Cheek	0	1 732.4	23.24	24.50	1.337	0.145	0.194	
	Left Tilt	0	1 732.4	23.24	24.50	1.337	0.142	0.190	

WCDMA Band V									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
RMC	Right Cheek	0	836.6	24.26	25.50	1.330	0.254	0.338	5
	Right Tilt	0	836.6	24.26	25.50	1.330	0.152	0.202	
	Left Cheek	0	836.6	24.26	25.50	1.330	0.217	0.289	
	Left Tilt	0	836.6	24.26	25.50	1.330	0.154	0.205	

LTE Band 2									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 49Offset	Right Cheek	0	1 880.0	23.40	24.50	1.288	0.142	0.183	
QPSK 20M 50RB 50Offset	Right Cheek	0	1 880.0	22.32	23.50	1.312	0.112	0.147	
QPSK 20M 1RB 49Offset	Right Tilt	0	1 880.0	23.40	24.50	1.288	0.110	0.142	
QPSK 20M 50RB 50Offset	Right Tilt	0	1 880.0	22.32	23.50	1.312	0.086	0.113	
QPSK 20M 1RB 49Offset	Left Cheek	0	1 880.0	23.40	24.50	1.288	0.214	0.276	6
QPSK 20M 50RB 50Offset	Left Cheek	0	1 880.0	22.32	23.50	1.312	0.177	0.232	
QPSK 20M 1RB 49Offset	Left Tilt	0	1 880.0	23.40	24.50	1.288	0.134	0.173	
QPSK 20M 50RB 50Offset	Left Tilt	0	1 880.0	22.32	23.50	1.312	0.124	0.163	

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0003 Page (72) of (323)	
--	--	---

LTE Band 5									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 49Offset	Right Cheek	0	836.5	24.32	25.00	1.169	0.182	0.213	
QPSK 10M 25RB 25Offset	Right Cheek	0	836.5	23.35	24.00	1.161	0.215	0.250	
QPSK 10M 1RB 49Offset	Right Tilt	0	836.5	24.32	25.00	1.169	0.158	0.185	
QPSK 10M 25RB 25Offset	Right Tilt	0	836.5	23.35	24.00	1.161	0.119	0.138	
QPSK 10M 1RB 49Offset	Left Cheek	0	836.5	24.32	25.00	1.169	0.257	0.300	7
QPSK 10M 25RB 25Offset	Left Cheek	0	836.5	23.35	24.00	1.161	0.194	0.225	
QPSK 10M 1RB 49Offset	Left Tilt	0	836.5	24.32	25.00	1.169	0.162	0.189	
QPSK 10M 25RB 25Offset	Left Tilt	0	836.5	23.35	24.00	1.161	0.120	0.139	

LTE Band 12									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 49Offset	Right Cheek	0	707.5	23.77	25.00	1.327	0.190	0.252	8
QPSK 10M 25RB 25Offset	Right Cheek	0	707.5	22.79	24.00	1.321	0.147	0.194	
QPSK 10M 1RB 49Offset	Right Tilt	0	707.5	23.77	25.00	1.327	0.046	0.061	
QPSK 10M 25RB 25Offset	Right Tilt	0	707.5	22.79	24.00	1.321	0.047	0.062	
QPSK 10M 1RB 49Offset	Left Cheek	0	707.5	23.77	25.00	1.327	0.102	0.135	
QPSK 10M 25RB 25Offset	Left Cheek	0	707.5	22.79	24.00	1.321	0.099	0.131	
QPSK 10M 1RB 49Offset	Left Tilt	0	707.5	23.77	25.00	1.327	0.063	0.084	
QPSK 10M 25RB 25Offset	Left Tilt	0	707.5	22.79	24.00	1.321	0.079	0.104	

LTE Band 13									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 0Offset	Right Cheek	0	782.0	23.45	25.00	1.429	0.170	0.243	9
QPSK 10M 25RB 12Offset	Right Cheek	0	782.0	22.49	24.00	1.416	0.134	0.190	
QPSK 10M 1RB 0Offset	Right Tilt	0	782.0	23.45	25.00	1.429	0.089	0.127	
QPSK 10M 25RB 12Offset	Right Tilt	0	782.0	22.49	24.00	1.416	0.078	0.110	
QPSK 10M 1RB 0Offset	Left Cheek	0	782.0	23.45	25.00	1.429	0.136	0.194	
QPSK 10M 25RB 12Offset	Left Cheek	0	782.0	22.49	24.00	1.416	0.108	0.153	
QPSK 10M 1RB 0Offset	Left Tilt	0	782.0	23.45	25.00	1.429	0.032	0.046	
QPSK 10M 25RB 12Offset	Left Tilt	0	782.0	22.49	24.00	1.416	0.040	0.057	

LTE Band 26									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 15M 1RB 36Offset	Right Cheek	0	831.5	23.81	24.50	1.172	0.130	0.152	
QPSK 15M 36RB 18Offset	Right Cheek	0	831.5	22.80	23.50	1.175	0.113	0.133	
QPSK 15M 1RB 36Offset	Right Tilt	0	831.5	23.81	24.50	1.172	0.111	0.130	
QPSK 15M 36RB 18Offset	Right Tilt	0	831.5	22.80	23.50	1.175	0.087	0.102	
QPSK 15M 1RB 36Offset	Left Cheek	0	831.5	23.81	24.50	1.172	0.149	0.175	10
QPSK 15M 36RB 18Offset	Left Cheek	0	831.5	22.80	23.50	1.175	0.119	0.140	
QPSK 15M 1RB 36Offset	Left Tilt	0	831.5	23.81	24.50	1.172	0.100	0.117	
QPSK 15M 36RB 18Offset	Left Tilt	0	831.5	22.80	23.50	1.175	0.078	0.092	

LTE Band 41									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 49Offset	Right Cheek	0	2 506.0	22.67	24.00	1.358	0.141	0.191	
QPSK 20M 50RB 24Offset	Right Cheek	0	2 506.0	21.65	23.00	1.365	0.104	0.142	
QPSK 20M 1RB 49Offset	Right Tilt	0	2 506.0	22.67	24.00	1.358	0.106	0.144	
QPSK 20M 50RB 24Offset	Right Tilt	0	2 506.0	21.65	23.00	1.365	0.082	0.112	
QPSK 20M 1RB 49Offset	Left Cheek	0	2 506.0	22.67	24.00	1.358	0.218	0.296	11
QPSK 20M 50RB 24Offset	Left Cheek	0	2 506.0	21.65	23.00	1.365	0.170	0.232	
QPSK 20M 1RB 49Offset	Left Tilt	0	2 506.0	22.67	24.00	1.358	0.054	0.073	
QPSK 20M 50RB 24Offset	Left Tilt	0	2 506.0	21.65	23.00	1.365	0.041	0.056	

LTE Band 66									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 49Offset	Right Cheek	0	1 770.0	23.81	25.00	1.315	0.152	0.200	
QPSK 20M 50RB 24Offset	Right Cheek	0	1 770.0	22.83	24.00	1.309	0.118	0.154	
QPSK 20M 1RB 49Offset	Right Tilt	0	1 770.0	23.81	25.00	1.315	0.123	0.162	
QPSK 20M 50RB 24Offset	Right Tilt	0	1 770.0	22.83	24.00	1.309	0.095	0.124	
QPSK 20M 1RB 49Offset	Left Cheek	0	1 770.0	23.81	25.00	1.315	0.173	0.227	12
QPSK 20M 50RB 24Offset	Left Cheek	0	1 770.0	22.83	24.00	1.309	0.138	0.181	
QPSK 20M 1RB 49Offset	Left Tilt	0	1 770.0	23.81	25.00	1.315	0.152	0.200	
QPSK 20M 50RB 24Offset	Left Tilt	0	1 770.0	22.83	24.00	1.309	0.123	0.161	

2.4 GHz WLAN											
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Area Scan Max SAR (W/kg)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11b	Right Cheek	0	2 437.0	13.45	14.00	1.135	1.005	0.388	0.229	0.261	13
	Right Tilt	0	2 437.0	13.45	14.00	1.135	1.005	0.157	-	-	
	Left Cheek	0	2 437.0	13.45	14.00	1.135	1.005	0.119	-	-	
	Left Tilt	0	2 437.0	13.45	14.00	1.135	1.005	0.105	-	-	

NII											
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Area Scan Max SAR (W/kg)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11ac (VHT80)	Right Cheek	0	5 290.0	9.96	11.00	1.271	1.136	0.646	0.282	0.407	
	Right Tilt	0	5 290.0	9.96	11.00	1.271	1.136	0.618	0.316	0.456	14
	Left Cheek	0	5 290.0	9.96	11.00	1.271	1.136	0.384	-	-	
	Left Tilt	0	5 290.0	9.96	11.00	1.271	1.136	0.409	-	-	
802.11ac (VHT80)	Right Cheek	0	5 610.0	10.16	11.00	1.213	1.136	0.750	0.340	0.469	
	Right Tilt	0	5 610.0	10.16	11.00	1.213	1.136	0.760	0.387	0.533	15
	Left Cheek	0	5 610.0	10.16	11.00	1.213	1.136	0.543	-	-	
	Left Tilt	0	5 610.0	10.16	11.00	1.213	1.136	0.525	-	-	
802.11ac (VHT80)	Right Cheek	0	5 775.0	10.23	11.00	1.194	1.136	0.847	0.404	0.548	
	Right Tilt	0	5 775.0	10.23	11.00	1.194	1.136	0.845	0.459	0.623	16
	Left Cheek	0	5 775.0	10.23	11.00	1.194	1.136	0.605	-	-	
	Left Tilt	0	5 775.0	10.23	11.00	1.194	1.136	0.659	-	-	

Bluetooth										
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
BDR DH5	Right Cheek	0	2 441.0	15.04	15.50	1.112	1.302	0.264	0.382	17
	Right Tilt	0	2 441.0	15.04	15.50	1.112	1.302	0.135	0.195	
	Left Cheek	0	2 441.0	15.04	15.50	1.112	1.302	0.098	0.142	
	Left Tilt	0	2 441.0	15.04	15.50	1.112	1.302	0.086	0.125	

11.2 Standalone Body-Worn SAR Test Results

GSM 850 Band									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
Voice	Front	15	836.6	32.52	33.80	1.343	0.204	0.274	
	Rear	15	836.6	32.52	33.80	1.343	0.287	0.385	
GPRS 4Tx	Front	15	836.6	28.58	29.50	1.236	0.295	0.365	
	Rear	15	836.6	28.58	29.50	1.236	0.395	0.488	18

GSM 1900 Band									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
Voice	Front	15	1 880.0	29.91	31.00	1.285	0.143	0.184	
	Rear	15	1 880.0	29.91	31.00	1.285	0.147	0.189	
GPRS 4Tx	Front	15	1 880.0	25.86	27.00	1.300	0.201	0.261	
	Rear	15	1 880.0	25.86	27.00	1.300	0.209	0.272	19

WCDMA Band II									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
RMC	Front	15	1 880.0	23.33	24.50	1.309	0.256	0.335	
	Rear	15	1 880.0	23.33	24.50	1.309	0.301	0.394	20

WCDMA Band IV									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
RMC	Front	15	1 732.4	23.24	24.50	1.337	0.246	0.329	
	Rear	15	1 732.4	23.24	24.50	1.337	0.250	0.334	21

WCDMA Band V									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
RMC	Front	15	836.6	24.26	25.50	1.330	0.219	0.291	
	Rear	15	836.6	24.26	25.50	1.330	0.302	0.402	22

LTE Band 2									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 49Offset	Front	15	1 880.0	23.40	24.50	1.288	0.270	0.348	
QPSK 20M 50RB 50Offset	Front	15	1 880.0	22.32	23.50	1.312	0.211	0.277	
QPSK 20M 1RB 49Offset	Rear	15	1 880.0	23.40	24.50	1.288	0.316	0.407	23
QPSK 20M 50RB 50Offset	Rear	15	1 880.0	22.32	23.50	1.312	0.250	0.328	

LTE Band 5									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 49Offset	Front	15	836.5	24.32	25.00	1.169	0.211	0.247	
QPSK 10M 25RB 25Offset	Front	15	836.5	23.35	24.00	1.161	0.166	0.193	
QPSK 10M 1RB 49Offset	Rear	15	836.5	24.32	25.00	1.169	0.319	0.373	24
QPSK 10M 25RB 25Offset	Rear	15	836.5	23.35	24.00	1.161	0.241	0.280	

LTE Band 12									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 49Offset	Front	15	707.5	23.77	25.00	1.327	0.185	0.245	
QPSK 10M 25RB 25Offset	Front	15	707.5	22.79	24.00	1.321	0.153	0.202	
QPSK 10M 1RB 49Offset	Rear	15	707.5	23.77	25.00	1.327	0.278	0.369	25
QPSK 10M 25RB 25Offset	Rear	15	707.5	22.79	24.00	1.321	0.221	0.292	

LTE Band 13									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 0Offset	Front	15	782.0	23.45	25.00	1.429	0.174	0.249	
QPSK 10M 25RB 12Offset	Front	15	782.0	22.49	24.00	1.416	0.142	0.201	
QPSK 10M 1RB 0Offset	Rear	15	782.0	23.45	25.00	1.429	0.262	0.374	26
QPSK 10M 25RB 12Offset	Rear	15	782.0	22.49	24.00	1.416	0.215	0.304	

LTE Band 26									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 15M 1RB 36Offset	Front	15	831.5	23.81	24.50	1.172	0.157	0.184	
QPSK 15M 36RB 18Offset	Front	15	831.5	22.80	23.50	1.175	0.123	0.145	
QPSK 15M 1RB 36Offset	Rear	15	831.5	23.81	24.50	1.172	0.237	0.278	27
QPSK 15M 36RB 18Offset	Rear	15	831.5	22.80	23.50	1.175	0.185	0.217	

LTE Band 41									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 49Offset	Front	15	2 506.0	22.67	24.00	1.358	0.153	0.208	
QPSK 20M 50RB 24Offset	Front	15	2 506.0	21.65	23.00	1.365	0.121	0.165	
QPSK 20M 1RB 49Offset	Rear	15	2 506.0	22.67	24.00	1.358	0.187	0.254	28
QPSK 20M 50RB 24Offset	Rear	15	2 506.0	21.65	23.00	1.365	0.151	0.206	

LTE Band 66									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 49Offset	Front	15	1 770.0	23.81	25.00	1.315	0.247	0.325	
QPSK 20M 50RB 24Offset	Front	15	1 770.0	22.83	24.00	1.309	0.196	0.257	
QPSK 20M 1RB 49Offset	Rear	15	1 770.0	23.81	25.00	1.315	0.265	0.348	29
QPSK 20M 50RB 24Offset	Rear	15	1 770.0	22.83	24.00	1.309	0.209	0.274	

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0003 Page (78) of (323)	
--	---	---

2.4 GHz WLAN											
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Area Scan Max SAR (W/kg)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11b	Front	15	2 437.0	18.21	19.00	1.199	1.005	0.107	-	-	
	Rear	15	2 437.0	18.21	19.00	1.199	1.005	0.314	0.213	0.257	30

NII											
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Area Scan Max SAR (W/kg)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11a	Front	15	5 280.0	15.52	16.00	1.117	1.033	0.232	-	-	
	Rear	15	5 280.0	15.52	16.00	1.117	1.033	0.430	0.208	0.240	31
802.11a	Front	15	5 600.0	15.23	16.00	1.194	1.033	0.342	-	-	
	Rear	15	5 600.0	15.23	16.00	1.194	1.033	0.648	0.311	0.384	32
802.11a	Front	15	5 785.0	15.02	16.00	1.253	1.033	0.451	0.201	0.260	
	Rear	15	5 785.0	15.02	16.00	1.253	1.033	0.734	0.338	0.437	33

Bluetooth										
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
BDR DH5	Front	15	2 441.0	15.04	15.50	1.112	1.302	0.027	0.039	
	Rear	15	2 441.0	15.04	15.50	1.112	1.302	0.083	0.120	34

11.3 Standalone Hotspot SAR Test Results

GSM 850 Band									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
GPRS 4Tx	Front	10	836.6	28.58	29.50	1.236	0.272	0.336	
	Rear	10	836.6	28.58	29.50	1.236	0.656	0.811	
	Rear	10	824.2	28.53	29.50	1.250	0.634	0.793	
	Rear	10	848.8	28.87	29.50	1.156	0.829	0.958	35
	Left	10	836.6	28.58	29.50	1.236	0.204	0.252	
	Right	10	836.6	28.58	29.50	1.236	0.417	0.515	
	Bottom	10	836.6	28.58	29.50	1.236	0.414	0.512	
	Repeated SAR								
	Rear	10	848.8	28.87	29.50	1.156	0.823	0.951	

GSM 1900 Band									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
GPRS 4Tx	Front	10	1 880.0	23.52	25.00	1.406	0.263	0.370	
	Rear	10	1 880.0	23.52	25.00	1.406	0.313	0.440	
	Left	10	1 880.0	23.52	25.00	1.406	0.164	0.231	
	Bottom	10	1 880.0	23.52	25.00	1.406	0.324	0.456	36

WCDMA Band II									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
RMC	Front	10	1 880.0	20.40	21.50	1.288	0.259	0.334	
	Rear	10	1 880.0	20.40	21.50	1.288	0.299	0.385	
	Left	10	1 880.0	20.40	21.50	1.288	0.159	0.205	
	Bottom	10	1 880.0	20.40	21.50	1.288	0.336	0.433	37

WCDMA Band IV									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
RMC	Front	10	1 732.4	20.27	21.50	1.327	0.212	0.281	
	Rear	10	1 732.4	20.27	21.50	1.327	0.256	0.340	
	Left	10	1 732.4	20.27	21.50	1.327	0.168	0.223	
	Bottom	10	1 732.4	20.27	21.50	1.327	0.284	0.377	38

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0003 Page (80) of (323)	
--	--	---

WCDMA Band V									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
RMC	Front	10	836.6	24.26	25.50	1.330	0.192	0.255	
	Rear	10	836.6	24.26	25.50	1.330	0.654	0.870	
	Rear	10	826.4	24.34	25.50	1.306	0.625	0.816	
	Rear	10	846.6	24.44	25.50	1.276	0.749	0.956	39
	Left	10	836.6	24.26	25.50	1.330	0.147	0.196	
	Right	10	836.6	24.26	25.50	1.330	0.292	0.388	
	Bottom	10	836.6	24.26	25.50	1.330	0.361	0.480	

LTE Band 2									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 49Offset	Front	10	1 900.0	20.33	21.50	1.309	0.273	0.357	
QPSK 20M 50RB 24Offset	Front	10	1 900.0	20.30	21.50	1.318	0.272	0.358	
QPSK 20M 1RB 49Offset	Rear	10	1 900.0	20.33	21.50	1.309	0.337	0.441	
QPSK 20M 50RB 24Offset	Rear	10	1 900.0	20.30	21.50	1.318	0.336	0.443	
QPSK 20M 1RB 49Offset	Left	10	1 900.0	20.33	21.50	1.309	0.169	0.221	
QPSK 20M 50RB 24Offset	Left	10	1 900.0	20.30	21.50	1.318	0.162	0.214	
QPSK 20M 1RB 49Offset	Bottom	10	1 900.0	20.33	21.50	1.309	0.369	0.483	40
QPSK 20M 50RB 24Offset	Bottom	10	1 900.0	20.30	21.50	1.318	0.364	0.480	

LTE Band 5									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 49Offset	Front	10	836.5	24.32	25.00	1.169	0.188	0.220	
QPSK 10M 25RB 25Offset	Front	10	836.5	23.35	24.00	1.161	0.165	0.192	
QPSK 10M 1RB 49Offset	Rear	10	836.5	24.32	25.00	1.169	0.658	0.769	41
QPSK 10M 25RB 25Offset	Rear	10	836.5	23.35	24.00	1.161	0.513	0.596	
QPSK 10M 1RB 49Offset	Left	10	836.5	24.32	25.00	1.169	0.142	0.166	
QPSK 10M 25RB 25Offset	Left	10	836.5	23.35	24.00	1.161	0.097	0.113	
QPSK 10M 1RB 49Offset	Right	10	836.5	24.32	25.00	1.169	0.285	0.333	
QPSK 10M 25RB 25Offset	Right	10	836.5	23.35	24.00	1.161	0.222	0.258	
QPSK 10M 1RB 49Offset	Bottom	10	836.5	24.32	25.00	1.169	0.407	0.476	
QPSK 10M 25RB 25Offset	Bottom	10	836.5	23.35	24.00	1.161	0.305	0.354	

LTE Band 12									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 49Offset	Front	10	707.5	23.77	25.00	1.327	0.174	0.231	
QPSK 10M 25RB 25Offset	Front	10	707.5	22.79	24.00	1.321	0.142	0.188	
QPSK 10M 1RB 49Offset	Rear	10	707.5	23.77	25.00	1.327	0.334	0.443	42
QPSK 10M 25RB 25Offset	Rear	10	707.5	22.79	24.00	1.321	0.265	0.350	
QPSK 10M 1RB 49Offset	Left	10	707.5	23.77	25.00	1.327	0.117	0.155	
QPSK 10M 25RB 25Offset	Left	10	707.5	22.79	24.00	1.321	0.090	0.119	
QPSK 10M 1RB 49Offset	Right	10	707.5	23.77	25.00	1.327	0.214	0.284	
QPSK 10M 25RB 25Offset	Right	10	707.5	22.79	24.00	1.321	0.168	0.222	
QPSK 10M 1RB 49Offset	Bottom	10	707.5	23.77	25.00	1.327	0.174	0.231	
QPSK 10M 25RB 25Offset	Bottom	10	707.5	22.79	24.00	1.321	0.137	0.181	

LTE Band 13									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 0Offset	Front	10	782.0	23.45	25.00	1.429	0.161	0.230	
QPSK 10M 25RB 12Offset	Front	10	782.0	22.49	24.00	1.416	0.132	0.187	
QPSK 10M 1RB 0Offset	Rear	10	782.0	23.45	25.00	1.429	0.332	0.474	43
QPSK 10M 25RB 12Offset	Rear	10	782.0	22.49	24.00	1.416	0.295	0.418	
QPSK 10M 1RB 0Offset	Left	10	782.0	23.45	25.00	1.429	0.134	0.191	
QPSK 10M 25RB 12Offset	Left	10	782.0	22.49	24.00	1.416	0.105	0.149	
QPSK 10M 1RB 0Offset	Right	10	782.0	23.45	25.00	1.429	0.236	0.337	
QPSK 10M 25RB 12Offset	Right	10	782.0	22.49	24.00	1.416	0.190	0.269	
QPSK 10M 1RB 0Offset	Bottom	10	782.0	23.45	25.00	1.429	0.165	0.236	
QPSK 10M 25RB 12Offset	Bottom	10	782.0	22.49	24.00	1.416	0.150	0.212	

LTE Band 26									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 15M 1RB 36Offset	Front	10	831.5	23.81	24.50	1.172	0.147	0.172	
QPSK 15M 36RB 18Offset	Front	10	831.5	22.80	23.50	1.175	0.117	0.137	
QPSK 15M 1RB 36Offset	Rear	10	831.5	23.81	24.50	1.172	0.525	0.615	44
QPSK 15M 36RB 18Offset	Rear	10	831.5	22.80	23.50	1.175	0.411	0.483	
QPSK 15M 1RB 36Offset	Left	10	831.5	23.81	24.50	1.172	0.205	0.240	
QPSK 15M 36RB 18Offset	Left	10	831.5	22.80	23.50	1.175	0.161	0.189	
QPSK 15M 1RB 36Offset	Right	10	831.5	23.81	24.50	1.172	0.204	0.239	
QPSK 15M 36RB 18Offset	Right	10	831.5	22.80	23.50	1.175	0.159	0.187	
QPSK 15M 1RB 36Offset	Bottom	10	831.5	23.81	24.50	1.172	0.307	0.360	
QPSK 15M 36RB 18Offset	Bottom	10	831.5	22.80	23.50	1.175	0.241	0.283	

LTE Band 41									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 49Offset	Front	10	2 593.0	21.72	23.00	1.343	0.237	0.318	
QPSK 20M 50RB 24Offset	Front	10	2 593.0	21.67	23.00	1.358	0.233	0.316	
QPSK 20M 1RB 49Offset	Rear	10	2 593.0	21.72	23.00	1.343	0.326	0.438	
QPSK 20M 50RB 24Offset	Rear	10	2 593.0	21.67	23.00	1.358	0.326	0.443	45
QPSK 20M 1RB 49Offset	Left	10	2 593.0	21.72	23.00	1.343	0.207	0.278	
QPSK 20M 50RB 24Offset	Left	10	2 593.0	21.67	23.00	1.358	0.206	0.280	
QPSK 20M 1RB 49Offset	Bottom	10	2 593.0	21.72	23.00	1.343	0.183	0.246	
QPSK 20M 50RB 24Offset	Bottom	10	2 593.0	21.67	23.00	1.358	0.180	0.244	

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0003 Page (83) of (323)	
--	--	---

LTE Band 66									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 49Offset	Front	10	1 770.0	20.35	21.50	1.303	0.218	0.284	
QPSK 20M 50RB 24Offset	Front	10	1 770.0	20.39	21.50	1.291	0.217	0.280	
QPSK 20M 1RB 49Offset	Rear	10	1 770.0	20.35	21.50	1.303	0.235	0.306	
QPSK 20M 50RB 24Offset	Rear	10	1 770.0	20.39	21.50	1.291	0.237	0.306	
QPSK 20M 1RB 49Offset	Left	10	1 770.0	20.35	21.50	1.303	0.172	0.224	
QPSK 20M 50RB 24Offset	Left	10	1 770.0	20.39	21.50	1.291	0.174	0.225	
QPSK 20M 1RB 49Offset	Bottom	10	1 770.0	20.35	21.50	1.303	0.321	0.418	46
QPSK 20M 50RB 24Offset	Bottom	10	1 770.0	20.39	21.50	1.291	0.322	0.416	

2.4 GHz WLAN											
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Area Scan Max SAR (W/kg)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11b	Front	10	2 437.0	18.21	19.00	1.199	1.005	0.236	-	-	
	Rear	10	2 437.0	18.21	19.00	1.199	1.005	0.803	0.518	0.624	47
	Left	10	2 437.0	18.21	19.00	1.199	1.005	0.270	0.171	0.206	
	Top	10	2 437.0	18.21	19.00	1.199	1.005	0.114	-	-	

NII											
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Area Scan Max SAR (W/kg)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11a	Front	10	5 785.0	15.02	16.00	1.253	1.033	0.736	-	-	
	Rear	10	5 785.0	15.02	16.00	1.253	1.033	1.140	0.600	0.777	
	Left	10	5 785.0	15.02	16.00	1.253	1.033	0.606	-	-	
	Top	10	5 785.0	15.02	16.00	1.253	1.033	1.344	0.641	0.830	48
	Top	10	5 745.0	15.00	16.00	1.259	1.033	1.293	0.614	0.799	

Bluetooth										
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
BDR DH5	Front	10	2 441.0	15.04	15.50	1.112	1.302	0.059	0.085	
	Rear	10	2 441.0	15.04	15.50	1.112	1.302	0.201	0.291	49
	Left	10	2 441.0	15.04	15.50	1.112	1.302	0.071	0.103	
	Top	10	2 441.0	15.04	15.50	1.112	1.302	0.031	0.045	

11.4 Standalone Phablet SAR Test Results

NII											
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Area Scan Max SAR (W/kg)	Measured 10g SAR (W/kg)	Scaled 10g SAR (W/kg)	Plot No.
802.11a	Front	0	5 280.0	15.52	16.00	1.117	1.033	2.925	-	-	
	Rear	0	5 280.0	15.52	16.00	1.117	1.033	10.103	0.938	1.082	50
	Left	0	5 280.0	15.52	16.00	1.117	1.033	1.910	-	-	
	Top	0	5 280.0	15.52	16.00	1.117	1.033	5.548	0.773	0.892	
802.11a	Front	0	5 600.0	15.23	16.00	1.194	1.033	4.215	-	-	
	Rear	0	5 600.0	15.23	16.00	1.194	1.033	11.653	1.010	1.246	51
	Left	0	5 600.0	15.23	16.00	1.194	1.033	2.690	-	-	
	Top	0	5 600.0	15.23	16.00	1.194	1.033	6.428	0.912	1.125	



11.5 Standalone NFC SAR Test Results

NFC							
Mode	EUT Position	Distance (mm)	Test setup		Frequency (MHz)	Measured 10 g SAR (W/kg)	Plot No.
			Type	Bitrate			
PBRS	Rear	0	A	106	13.6	0.015	
		0	B	106	13.6	0.016	
		0	F	106	13.6	0.000	
		0	B	212	13.6	0.016	
		0	B	424	13.6	0.017	52
	Front	0	B	424	13.6	0.000	
	Left	0	B	424	13.6	0.000	
	Right	0	B	424	13.6	0.000	
	Top	0	B	424	13.6	0.000	
	Bottom	0	B	424	13.6	0.000	

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0003 Page (86) of (323)	
---	---	---

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D04v01.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Liquid tissue depth was at least 15 cm.
5. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
6. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D04v01.
7. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
8. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
9. This device utilizes power reduction for some wireless modes, as outlined in Section 2.3. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous transmission scenarios.

GSM Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. This device supports GSM VOIP in the head and body-worn configurations; therefore GPRS was additionally evaluated for head and body-worn compliance.
3. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
4. Per FCC KDB Publication 447498 D04v01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). Since the maximum output power variation across the required test channels is not $> \frac{1}{2}$ dB, the middle channel was used for testing.

WCDMA Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D04v01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s).

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0003 Page (87) of (323)	
---	---	---

LTE Notes:

1. Justification Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
2. When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
3. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
4. Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
5. Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
6. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator.
7. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
8. TDD LTE was tested using UL-DL configuration 0 with 6 UL sub frames and 2S sub-frames using extended cyclic prefix only and special sub frame configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Sec. 4, the duty factor using extended cyclic prefix is 0.633(cf=1.58).
9. For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

WLAN & Bluetooth Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
2. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance.
3. When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
4. When the specified maximum output power is the same for both UNII Band1 and UNII Band 2A, begins SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is $\leq 1.2\text{W/kg}$, SAR is not required for UNII band1 $> 1.2\text{W/kg}$, both bands should be tested independently for SAR.
5. When the maximum reported 1g averaged SAR is $\leq 0.8\text{ W/kg}$, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was $\leq 1.20\text{ W/kg}$ for 1g evaluations or all test channels were measured.
6. When the reported SAR is $\leq 0.4\text{ W/kg}$, further SAR measurement within this exposure condition are not required Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR is $\leq 0.8\text{ W/kg}$ or all test positions are measured.

12. Simultaneous Transmission

The following procedures adopted from FCC KDB Publication 447498 D04v01 are applicable to devices with built in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D04v01 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g or 10g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is within SAR limits. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.



12.1 Simultaneous Transmission Analysis

Band / Position		Licensed								
		GSM/GPRS		WCDMA			LTE			
		850 Band	1900 Band	II	IV	V	2	5	12	13
		[①]								
Head	Right Cheek	0.398	0.134	0.216	0.230	0.338	0.183	0.250	0.252	0.243
	Right Tilt	0.220	0.142	0.166	0.170	0.202	0.142	0.185	0.062	0.127
	Left Cheek	0.335	0.250	0.287	0.194	0.289	0.276	0.300	0.135	0.194
	Left Tilt	0.184	0.121	0.166	0.190	0.205	0.173	0.189	0.104	0.057
Body-worn	Front	0.365	0.261	0.335	0.329	0.291	0.348	0.247	0.245	0.249
	Rear	0.488	0.272	0.394	0.334	0.402	0.407	0.373	0.369	0.374
Hotspot	Front	0.336	0.370	0.334	0.281	0.255	0.358	0.220	0.231	0.230
	Rear	0.958	0.440	0.385	0.340	0.956	0.443	0.769	0.443	0.474
	Left	0.252	0.231	0.205	0.223	0.196	0.221	0.166	0.155	0.191
	Right	0.515	-	-	-	0.388	-	0.333	0.284	0.337
	Top	-	-	-	-	-	-	-	-	-
	Bottom	0.512	0.456	0.433	0.377	0.480	0.483	0.476	0.231	0.236
Phablet	Front	-	-	-	-	-	-	-	-	-
	Rear	-	-	-	-	-	-	-	-	-
	Left	-	-	-	-	-	-	-	-	-
	Right	-	-	-	-	-	-	-	-	-
	Top	-	-	-	-	-	-	-	-	-
	Bottom	-	-	-	-	-	-	-	-	-

Band / Position		Licensed			WLAN		Bluetooth	NFC
		LTE						
		26	41	66	2.4 GHz	5 GHz		
		[①]			[②]	[③]		
Head	Right Cheek	0.152	0.191	0.200	0.261	0.548	0.382	-
	Right Tilt	0.130	0.144	0.162	0.261	0.623	0.195	-
	Left Cheek	0.175	0.296	0.227	0.261	0.623	0.142	-
	Left Tilt	0.117	0.073	0.200	0.261	0.623	0.125	-
Body-worn	Front	0.184	0.208	0.325	0.257	0.260	0.039	-
	Rear	0.278	0.254	0.348	0.257	0.437	0.120	-
Hotspot	Front	0.172	0.318	0.284	0.624	0.830	0.085	-
	Rear	0.615	0.443	0.306	0.624	0.777	0.291	-
	Left	0.240	0.280	0.225	0.206	0.830	0.103	-
	Right	0.239	-	-	-	-	-	-
	Top	-	-	-	0.624	0.830	0.045	-
	Bottom	0.360	0.246	0.418	-	-	-	-
Phablet	Front	-	-	-	-	1.246	-	0.000
	Rear	-	-	-	-	1.246	-	0.017
	Left	-	-	-	-	1.246	-	0.000
	Right	-	-	-	-	-	-	0.000
	Top	-	-	-	-	1.125	-	0.000
	Bottom	-	-	-	-	-	-	0.000

Summation									
GSM/GPRS 850 Band									
Band / Position		1)	2)	3)	4)	5)	6)	7)	8)
		[①+②]	[①+③]	[①+④]	[①+③+④]	[①+②+⑤]	[①+③+⑤]	[①+④+⑤]	[①+③+④+⑤]
Head	Right Cheek	0.659	0.946	0.780	1.328	N/A			
	Right Tilt	0.481	0.843	0.415	1.038				
	Left Cheek	0.596	0.958	0.477	1.100				
	Left Tilt	0.445	0.807	0.309	0.932				
Body-worn	Front	0.622	0.625	0.404	0.664				
	Rear	0.745	0.925	0.608	1.045				
Hotspot	Front	0.960	1.166	0.421	1.251				
	Rear	1.582	1.735	1.249	2.026				
	Left	0.458	1.082	0.355	1.185				
	Right	0.515	0.515	0.515	0.515				
	Top	0.624	0.830	0.045	0.875				
	Bottom	0.512	0.512	0.512	0.512				
Phablet	Front	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Rear	-	1.246	-	1.246	0.017	1.263	0.017	1.263
	Left	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Right	-	-	-	-	-	-	-	-
	Top	-	1.125	-	1.125	0.000	1.125	0.000	1.125
	Bottom	-	-	-	-	-	-	-	-
GSM/GPRS 1900 Band									
Head	Right Cheek	0.395	0.682	0.516	1.064	N/A			
	Right Tilt	0.403	0.765	0.337	0.960				
	Left Cheek	0.511	0.873	0.392	1.015				
	Left Tilt	0.382	0.744	0.246	0.869				
Body-worn	Front	0.518	0.521	0.300	0.560				
	Rear	0.529	0.709	0.392	0.829				
Hotspot	Front	0.994	1.200	0.455	1.285				
	Rear	1.064	1.217	0.731	1.508				
	Left	0.437	1.061	0.334	1.164				
	Right	-	-	-	-				
	Top	0.624	0.830	0.045	0.875				
	Bottom	0.456	0.456	0.456	0.456				
Phablet	Front	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Rear	-	1.246	-	1.246	0.017	1.263	0.017	1.263
	Left	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Right	-	-	-	-	-	-	-	-
	Top	-	1.125	-	1.125	0.000	1.125	0.000	1.125
	Bottom	-	-	-	-	-	-	-	-

Summation									
WCDMA Band 2									
Band / Position		1)	2)	3)	4)	5)	6)	7)	8)
		[①+②]	[①+③]	[①+④]	[①+③+④]	[①+②+⑤]	[①+③+⑤]	[①+④+⑤]	[①+③+④+⑤]
Head	Right Cheek	0.477	0.764	0.598	1.146	N/A			
	Right Tilt	0.427	0.789	0.361	0.984				
	Left Cheek	0.548	0.910	0.429	1.052				
	Left Tilt	0.427	0.789	0.291	0.914				
Body-worn	Front	0.592	0.595	0.374	0.634				
	Rear	0.651	0.831	0.514	0.951				
Hotspot	Front	0.958	1.164	0.419	1.249				
	Rear	1.009	1.162	0.676	1.453				
	Left	0.411	1.035	0.308	1.138				
	Right	-	-	-	-				
	Top	0.624	0.830	0.045	0.875				
	Bottom	0.433	0.433	0.433	0.433				
Phablet	Front	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Rear	-	1.246	-	1.246	0.017	1.263	0.017	1.263
	Left	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Right	-	-	-	-	-	-	-	-
	Top	-	1.125	-	1.125	0.000	1.125	0.000	1.125
	Bottom	-	-	-	-	-	-	-	-
WCDMA Band 4									
Head	Right Cheek	0.491	0.778	0.612	1.160	N/A			
	Right Tilt	0.431	0.793	0.365	0.988				
	Left Cheek	0.455	0.817	0.336	0.959				
	Left Tilt	0.451	0.813	0.315	0.938				
Body-worn	Front	0.586	0.589	0.368	0.628				
	Rear	0.591	0.771	0.454	0.891				
Hotspot	Front	0.905	1.111	0.366	1.196				
	Rear	0.964	1.117	0.631	1.408				
	Left	0.429	1.053	0.326	1.156				
	Right	-	-	-	-				
	Top	0.624	0.830	0.045	0.875				
	Bottom	0.377	0.377	0.377	0.377				
Phablet	Front	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Rear	-	1.246	-	1.246	0.017	1.263	0.017	1.263
	Left	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Right	-	-	-	-	-	-	-	-
	Top	-	1.125	-	1.125	0.000	1.125	0.000	1.125
	Bottom	-	-	-	-	-	-	-	-

Summation									
WCDMA Band 5									
Band / Position		1)	2)	3)	4)	5)	6)	7)	8)
		[①+②]	[①+③]	[①+④]	[①+③+④]	[①+②+⑤]	[①+③+⑤]	[①+④+⑤]	[①+③+④+⑤]
Head	Right Cheek	0.599	0.886	0.720	1.268	N/A			
	Right Tilt	0.463	0.825	0.397	1.020				
	Left Cheek	0.550	0.912	0.431	1.054				
	Left Tilt	0.466	0.828	0.330	0.953				
Body-worn	Front	0.548	0.551	0.330	0.590				
	Rear	0.659	0.839	0.522	0.959				
Hotspot	Front	0.879	1.085	0.340	1.170				
	Rear	1.580	1.733	1.247	2.024				
	Left	0.402	1.026	0.299	1.129				
	Right	0.388	0.388	0.388	0.388				
	Top	0.624	0.830	0.045	0.875				
	Bottom	0.480	0.480	0.480	0.480				
Phablet	Front	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Rear	-	1.246	-	1.246	0.017	1.263	0.017	1.263
	Left	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Right	-	-	-	-	-	-	-	-
	Top	-	1.125	-	1.125	0.000	1.125	0.000	1.125
	Bottom	-	-	-	-	-	-	-	-
LTE Band 2									
Head	Right Cheek	0.444	0.731	0.565	1.113	N/A			
	Right Tilt	0.403	0.765	0.337	0.960				
	Left Cheek	0.537	0.899	0.418	1.041				
	Left Tilt	0.434	0.796	0.298	0.921				
Body-worn	Front	0.605	0.608	0.387	0.647				
	Rear	0.664	0.844	0.527	0.964				
Hotspot	Front	0.982	1.188	0.443	1.273				
	Rear	1.067	1.220	0.734	1.511				
	Left	0.427	1.051	0.324	1.154				
	Right	-	-	-	-				
	Top	0.624	0.830	0.045	0.875				
	Bottom	0.483	0.483	0.483	0.483				
Phablet	Front	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Rear	-	1.246	-	1.246	0.017	1.263	0.017	1.263
	Left	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Right	-	-	-	-	-	-	-	-
	Top	-	1.125	-	1.125	0.000	1.125	0.000	1.125
	Bottom	-	-	-	-	-	-	-	-

Summation									
LTE Band 5									
Band / Position		1)	2)	3)	4)	5)	6)	7)	8)
		[①+②]	[①+③]	[①+④]	[①+③+④]	[①+②+⑤]	[①+③+⑤]	[①+④+⑤]	[①+③+④+⑤]
Head	Right Cheek	0.511	0.798	0.632	1.180	N/A			
	Right Tilt	0.446	0.808	0.380	1.003				
	Left Cheek	0.561	0.923	0.442	1.065				
	Left Tilt	0.450	0.812	0.314	0.937				
Body-worn	Front	0.504	0.507	0.286	0.546				
	Rear	0.630	0.810	0.493	0.930				
Hotspot	Front	0.844	1.050	0.305	1.135				
	Rear	1.393	1.546	1.06	1.837				
	Left	0.372	0.996	0.269	1.099				
	Right	0.333	0.333	0.333	0.333				
	Top	0.624	0.830	0.045	0.875				
	Bottom	0.476	0.476	0.476	0.476				
Phablet	Front	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Rear	-	1.246	-	1.246	0.017	1.263	0.017	1.263
	Left	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Right	-	-	-	-	-	-	-	-
	Top	-	1.125	-	1.125	0.000	1.125	0.000	1.125
	Bottom	-	-	-	-	-	-	-	-
LTE Band 12									
Head	Right Cheek	0.513	0.800	0.634	1.182	N/A			
	Right Tilt	0.323	0.685	0.257	0.880				
	Left Cheek	0.396	0.758	0.277	0.900				
	Left Tilt	0.365	0.727	0.229	0.852				
Body-worn	Front	0.502	0.505	0.284	0.544				
	Rear	0.626	0.806	0.489	0.926				
Hotspot	Front	0.855	1.061	0.316	1.146				
	Rear	1.067	1.220	0.734	1.511				
	Left	0.361	0.985	0.258	1.088				
	Right	0.284	0.284	0.284	0.284				
	Top	0.624	0.830	0.045	0.875				
	Bottom	0.231	0.231	0.231	0.231				
Phablet	Front	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Rear	-	1.246	-	1.246	0.017	1.263	0.017	1.263
	Left	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Right	-	-	-	-	-	-	-	-
	Top	-	1.125	-	1.125	0.000	1.125	0.000	1.125
	Bottom	-	-	-	-	-	-	-	-

Summation									
LTE Band 13									
Band / Position		1)	2)	3)	4)	5)	6)	7)	8)
		[①+②]	[①+③]	[①+④]	[①+③+④]	[①+②+⑤]	[①+③+⑤]	[①+④+⑤]	[①+③+④+⑤]
Head	Right Cheek	0.504	0.791	0.625	1.173	N/A			
	Right Tilt	0.388	0.750	0.322	0.945				
	Left Cheek	0.455	0.817	0.336	0.959				
	Left Tilt	0.318	0.680	0.182	0.805				
Body-worn	Front	0.506	0.509	0.288	0.548				
	Rear	0.631	0.811	0.494	0.931				
Hotspot	Front	0.854	1.060	0.315	1.145				
	Rear	1.098	1.251	0.765	1.542				
	Left	0.397	1.021	0.294	1.124				
	Right	0.337	0.337	0.337	0.337				
	Top	0.624	0.830	0.045	0.875				
	Bottom	0.236	0.236	0.236	0.236				
Phablet	Front	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Rear	-	1.246	-	1.246	0.017	1.263	0.017	1.263
	Left	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Right	-	-	-	-	-	-	-	-
	Top	-	1.125	-	1.125	0.000	1.125	0.000	1.125
	Bottom	-	-	-	-	-	-	-	-
LTE Band 26									
Head	Right Cheek	0.413	0.700	0.534	1.082	N/A			
	Right Tilt	0.391	0.753	0.325	0.948				
	Left Cheek	0.436	0.798	0.317	0.940				
	Left Tilt	0.378	0.740	0.242	0.865				
Body-worn	Front	0.441	0.444	0.223	0.483				
	Rear	0.535	0.715	0.398	0.835				
Hotspot	Front	0.796	1.002	0.257	1.087				
	Rear	1.239	1.392	0.906	1.683				
	Left	0.446	1.070	0.343	1.173				
	Right	0.239	0.239	0.239	0.239				
	Top	0.624	0.830	0.045	0.875				
	Bottom	0.360	0.360	0.360	0.360				
Phablet	Front	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Rear	-	1.246	-	1.246	0.017	1.263	0.017	1.263
	Left	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Right	-	-	-	-	-	-	-	-
	Top	-	1.125	-	1.125	0.000	1.125	0.000	1.125
	Bottom	-	-	-	-	-	-	-	-

Summation									
LTE Band 41									
Band / Position		1)	2)	3)	4)	5)	6)	7)	8)
		[①+②]	[①+③]	[①+④]	[①+③+④]	[①+②+⑤]	[①+③+⑤]	[①+④+⑤]	[①+③+④+⑤]
Head	Right Cheek	0.452	0.739	0.573	1.121	N/A			
	Right Tilt	0.405	0.767	0.339	0.962				
	Left Cheek	0.557	0.919	0.438	1.061				
	Left Tilt	0.334	0.696	0.198	0.821				
Body-worn	Front	0.465	0.468	0.247	0.507				
	Rear	0.511	0.691	0.374	0.811				
Hotspot	Front	0.942	1.148	0.403	1.233				
	Rear	1.067	1.220	0.734	1.511				
	Left	0.486	1.110	0.383	1.213				
	Right	-	-	-	-				
	Top	0.624	0.830	0.045	0.875				
	Bottom	0.246	0.246	0.246	0.246				
Phablet	Front	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Rear	-	1.246	-	1.246	0.017	1.263	0.017	1.263
	Left	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Right	-	-	-	-	-	-	-	-
	Top	-	1.125	-	1.125	0.000	1.125	0.000	1.125
	Bottom	-	-	-	-	-	-	-	-
LTE Band 66									
Head	Right Cheek	0.461	0.748	0.582	1.130	N/A			
	Right Tilt	0.423	0.785	0.357	0.980				
	Left Cheek	0.488	0.850	0.369	0.992				
	Left Tilt	0.461	0.823	0.325	0.948				
Body-worn	Front	0.582	0.585	0.364	0.624				
	Rear	0.605	0.785	0.468	0.905				
Hotspot	Front	0.908	1.114	0.369	1.199				
	Rear	0.930	1.083	0.597	1.374				
	Left	0.431	1.055	0.328	1.158				
	Right	-	-	-	-				
	Top	0.624	0.830	0.045	0.875				
	Bottom	0.418	0.418	0.418	0.418				
Phablet	Front	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Rear	-	1.246	-	1.246	0.017	1.263	0.017	1.263
	Left	-	1.246	-	1.246	0.000	1.246	0.000	1.246
	Right	-	-	-	-	-	-	-	-
	Top	-	1.125	-	1.125	0.000	1.125	0.000	1.125
	Bottom	-	-	-	-	-	-	-	-

Notes: Simultaneous transmission SAR test exclusion considerations

- Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneously transmitting antenna. When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. Per KDB Publication 447498 D04v01.
- When the sum of SAR1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR1g 1.6 W/kg), the SPLSR procedures is not required. When the sum of SAR1g is greater than the SAR limit (SAR1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.
- "N/A" = SAR not supported.
- " - " = SAR test exclusion.
- Yellow entries was verified in section 12.2 by the SPLSR.



12.2 Hybrid SPLSR Procedure

Nov. 2019 TCB Workshop (SPLSR Hotspot Combination)

For devices whose simultaneous SAR is $> 1.6 \text{ W/kg}$ and who do not meet the SPLSR criteria, enlarged zoom scan/volume scan procedure is available.

This procedure can be quite time consuming, especially for devices where antennas are spatially separated.

Often needed only because one co-located antenna pair does not meet SPLSR.

Hybrid SPLSR and enlarged zoom scan/volume scan approach now being considered.

Can only be applied when simultaneous transmission SAR is $> 1.6 \text{ W/kg}$, it does not meet SPLSR criteria, and antenna pair is co-located.

The Hybrid SPLSR was performed according to the following Test Procedure:

step1) Perform enlarged zoom scan/volume scan on the co-located antenna pair to determine 1g/10g aggregate SAR

Step2) Apply SPLSR procedure for the spatially separated antenna and aggregate SAR distribution of the co-located antenna pair

1. Standalone SAR Numbering

licensed	WLAN 2.4 GHz	WLAN 5 GHz	Bluetooth
[①]	[②]	[③]	[④]

2. Combination for Hybrid SPLSR

No	Mode	Position	Combination	Scenario	Scaled 1g SAR	Coordinates		
						X	Y	Z
1	Hotspot	Rear	③+④	WLAN 5 GHz + Bluetooth	0.962	-0.05600	-0.08000	-0.20700

WLAN 5 GHz Standalone Volume Scan Plot – Rear(Hotspot)

Date: 1/12/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [4. WLAN 5.8 GHz Hotspot VS.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172167337ECE

Communication System: UID 0, 5GWLAN (0); Frequency: 5785 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5785 \text{ MHz}$; $\sigma = 5.16 \text{ S/m}$; $\epsilon_r = 33.886$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928;ConvF(4.65, 4.65, 4.65) @ 5785 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11_a_CH157_Rear_10 mm/Volume Scan (30x31x7): Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 18.36 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 4.48 W/kg

SAR(1 g) = 0.622 W/kg; SAR(10 g) = 0.218 W/kg

Total Absorbed Power = 0.00631 W

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.49 W/kg

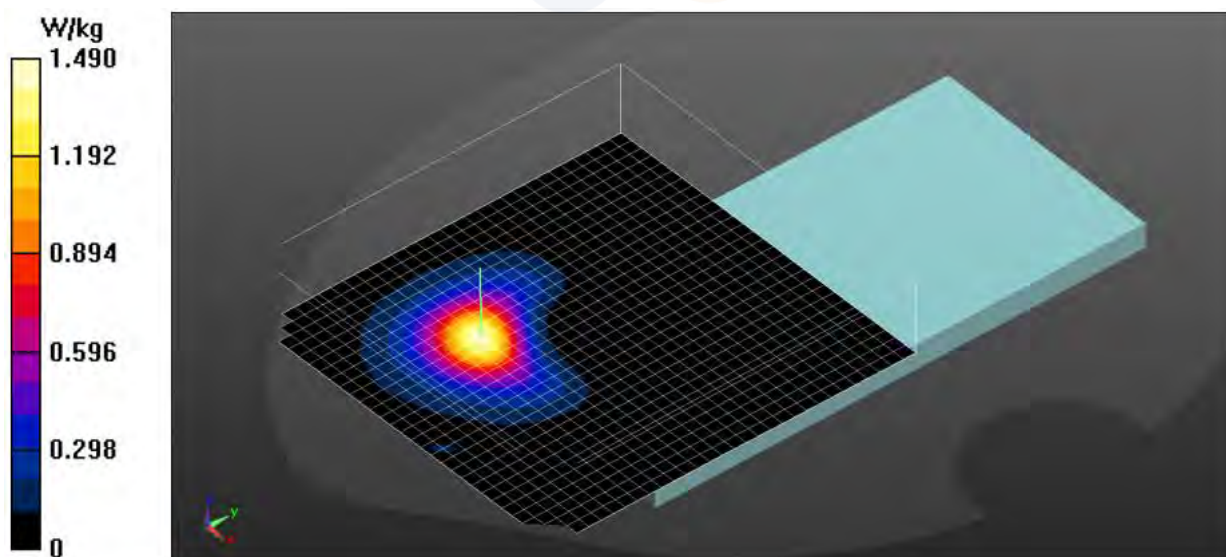

Bluetooth Standalone Volume Scan Plot – Rear(Hotspot)

Date: 1/9/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [7. Bluetooth BDR_DH5 Hotspot VS.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172167337ECE

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.30167
Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.795$ S/m; $\epsilon_r = 38.131$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928;ConvF(7.46, 7.46, 7.46) @ 2441 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Bluetooth_BDR_DH5_CH39_Rear_10 mm/Volume Scan (30x31x7): Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 14.71 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.461 W/kg

SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.099 W/kg

Total Absorbed Power = 0.00528 W

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.353 W/kg

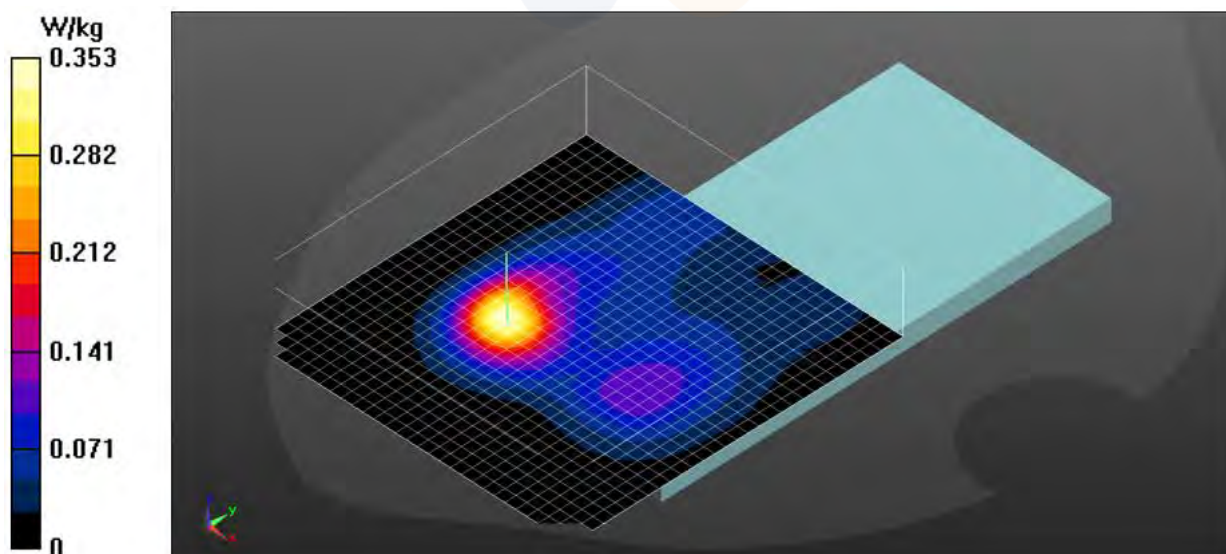

No.1 : Hotspot Volume Scan Scenario : WLAN 5 GHz + Bluetooth

Multi-Band Average SAR

Multi-Band Configurations:


DASY Configuration for Configuration/802.11_a_CH157_Rear_10 mm/Volume Scan:

DASY Configuration for Configuration/Bluetooth_BDR_DH5_CH39_Rear_10 mm/Volume Scan:

Multi Band Result:

SAR(1 g) = 0.962 W/kg; SAR(10 g) = 0.375 W/kg

Maximum value of SAR (interpolated) = 3.44 W/kg

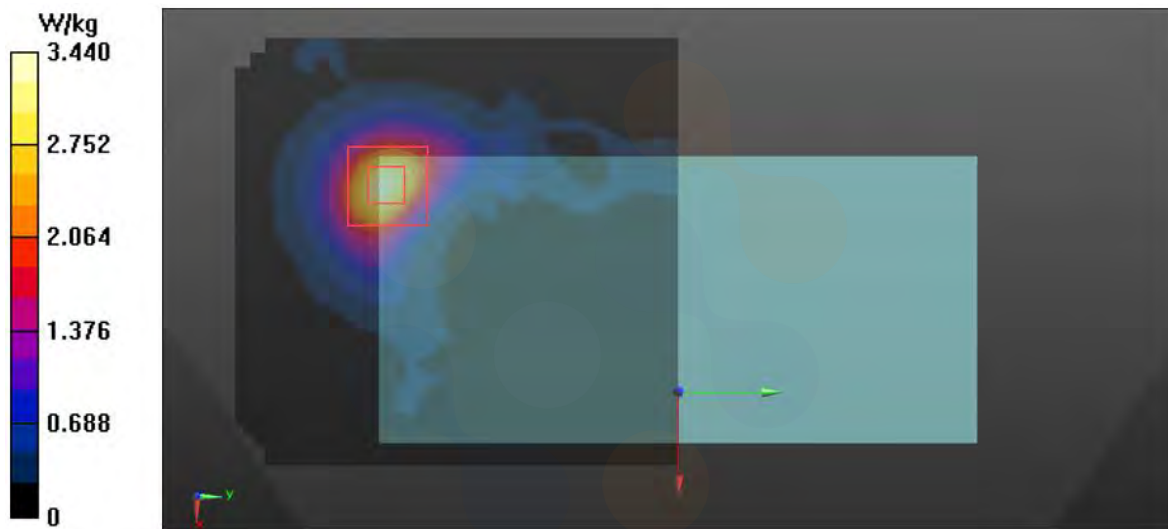

12.3 SPLSR(Hybrid) and Volume Scan Analysis

Summary Table

Band	Mode	Simultaneous Scenario No	Highest SPLSR ≤ 0.04 Limit	Volume scan	
				Required (Yes / No)	Combined SAR Result (W/kg)
GSM 850	Hotspot	2	0.01	No	N/A
		4	0.02	No	N/A
WCDMA Band V		2	0.01	No	N/A
		4	0.02	No	N/A
LTE Band 5		4	0.01	No	N/A
LTE Band 26		4	0.01	No	N/A




12.3.1 GSM 850


licensed	WLAN 2.4 GHz	WLAN 5 GHz	Bluetooth
[①]	[②]	[③]	[④]

GSM 850 SPLSR – Rear Position			
Scenario No.	No.2		No.4
Scenario	[①]+[③]		[①]+[③]+[④]
Rear	1.735		2.026
Volume scan	Not Required		Not Required

Scenario No.		Scenario		Position		SUM	
2		[①]+[③]		Rear		1.735	
Distance [mm]	SPLSR ≤ 0.04 Limit	Numbering	Mode	SAR W/kg	Coordinates		
					X	Y	Z
165.39	0.01	①	GSM 850	0.958	-0.01650	0.08040	-0.20900
		③	Wi-Fi 5 GHz	0.777	-0.05600	-0.08020	-0.20800

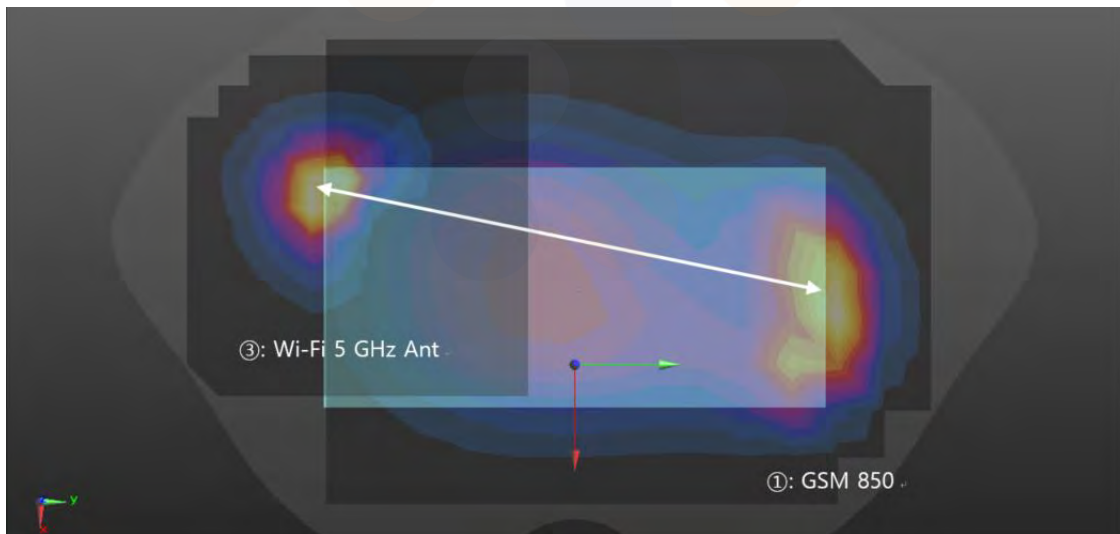

Scenario No.		Scenario		Position		SUM	
4		[(1)]+[(3)]+[(4)]		Rear		2.026	
Distance [mm]	SPLSR ≤ 0.04 Limit	Numbering	Mode	SAR W/kg	Coordinates		
					X	Y	Z
165.20	0.02	(1)	GSM 850	0.958	-0.01650	0.08040	-0.20900
		(3)(4) (Hybird)	Wi-Fi 5 GHz + Bluetooth	0.962	-0.05600	-0.08000	-0.20700

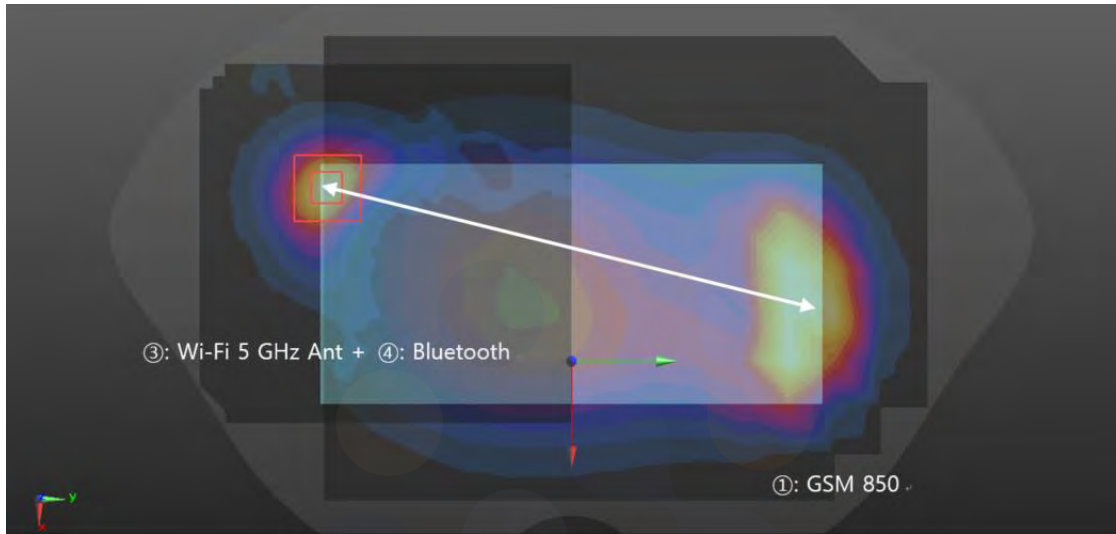


12.3.2 WCDMA V


licensed	WLAN 2.4 GHz	WLAN 5 GHz	Bluetooth
[①]	[②]	[③]	[④]

WCDMA V SPLSR – Rear Position		
Scenario No.	No.2	No.4
Scenario	[①]+[③]	[①]+[③]+[④]
Rear	1.733	2.024
Volume scan	Not Required	Not Required

Scenario No.		Scenario		Position		SUM	
2		[①]+[③]		Rear		1.733	
Distance [mm]	SPLSR ≤ 0.04 Limit	Numbering	Mode	SAR W/kg	Coordinates		
					X	Y	Z
163.56	0.01	①	WCDMA V	0.956	-0.01810	0.07890	-0.21000
		③	Wi-Fi 5 GHz	0.777	-0.05600	-0.08020	-0.20800

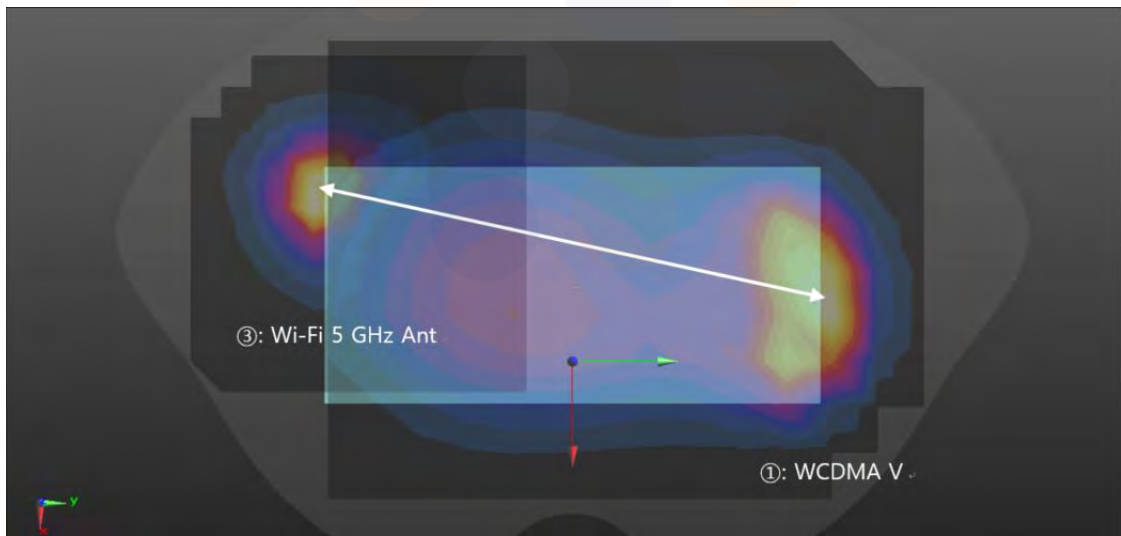

Scenario No.		Scenario		Position		SUM	
4		[①]+[③]+[④]		Rear		2.024	
Distance [mm]	SPLSR ≤ 0.04 Limit	Numbering	Mode	SAR W/kg	Coordinates		
					X	Y	Z
163.38	0.02	①	WCDMA V	0.956	-0.01810	0.07890	-0.21000
		③④ (Hybird)	Wi-Fi 5 GHz + Bluetooth	0.962	-0.05600	-0.08000	-0.20700

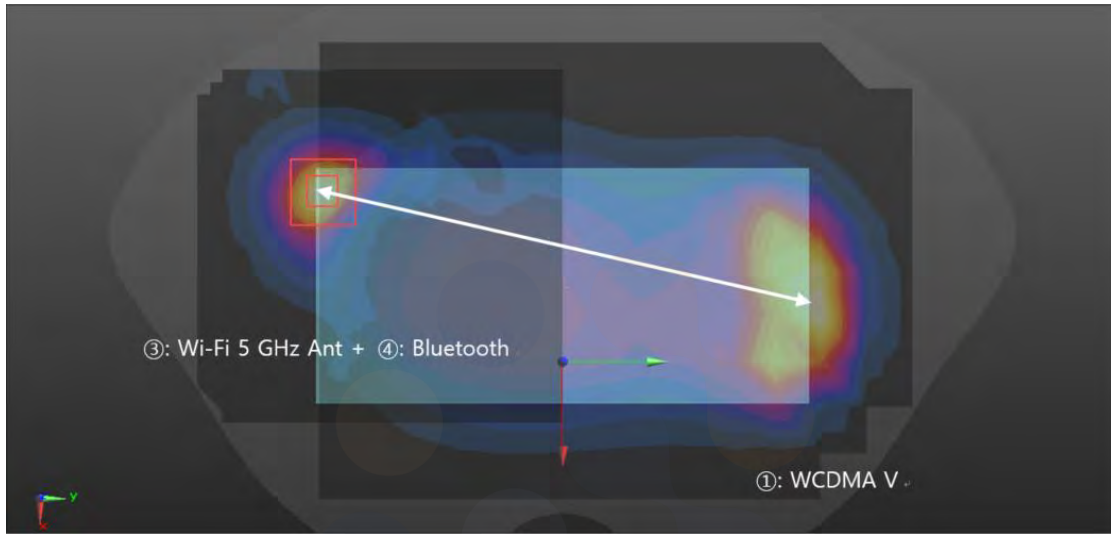


12.3.3 LTE Band 5

licensed	WLAN 2.4 GHz	WLAN 5 GHz	Bluetooth
[①]	[②]	[③]	[④]

LTE Band 5 SPLSR – Rear Position	
Scenario No.	No.4
Scenario	[①]+[③]+[④]
Rear	1.837
Volume scan	Not Required

Scenario No.		Scenario		Position		SUM	
4		[①]+[③]+[④]		Rear		1.837	
Distance [mm]	SPLSR ≤ 0.04 Limit	Numbering	Mode	SAR W/kg	Coordinates		
					X	Y	Z
161.63	0.01	①	LTE Band 5	0.769	-0.01940	0.07740	-0.21000
		③④ (Hybird)	Wi-Fi 5 GHz + Bluetooth	0.962	-0.05600	-0.08000	-0.20700

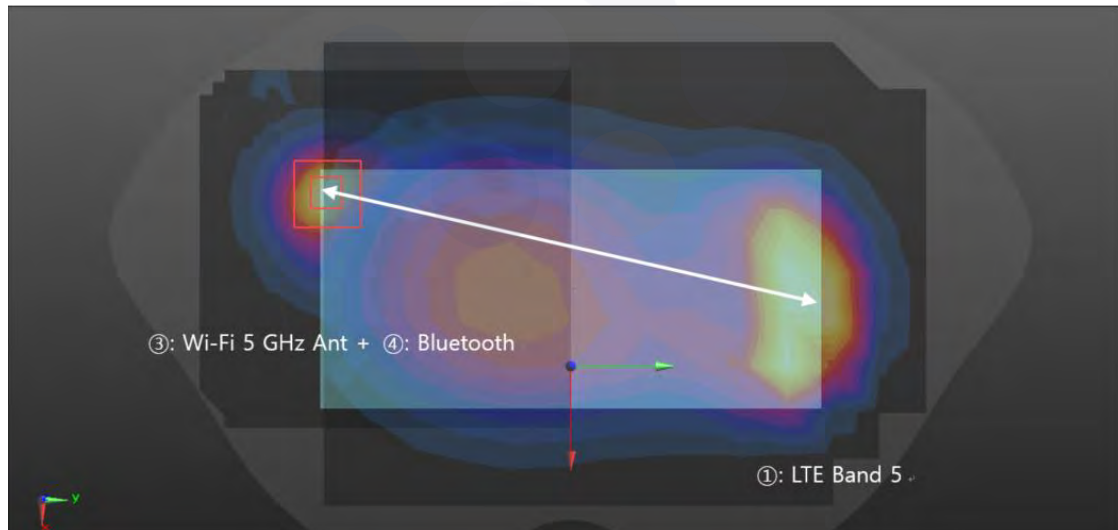


12.3.4 LTE Band 26

licensed	WLAN 2.4 GHz	WLAN 5 GHz	Bluetooth
[①]	[②]	[③]	[④]

LTE Band 26 SPLSR – Rear Position	
Scenario No.	No.4
Scenario	[①]+[③]+[④]
Rear	1.683
Volume scan	Not Required

Scenario No.		Scenario		Position		SUM	
4		[①]+[③]+[④]		Rear		1.683	
Distance [mm]	SPLSR ≤ 0.04 Limit	Numbering	Mode	SAR W/kg	Coordinates		
					X	Y	Z
164.17	0.01	①	LTE Band 26	0.615	-0.01480	0.07890	-0.20900
		③④ (Hybird)	Wi-Fi 5 GHz + Bluetooth	0.962	-0.05600	-0.08000	-0.20700

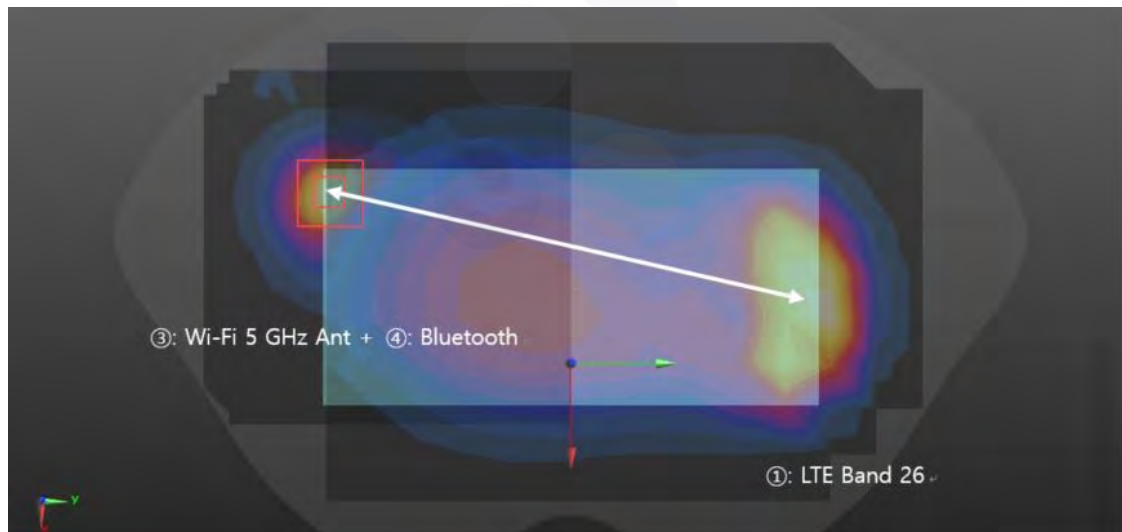

13. SAR Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg.
- 2) **When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.**
- 3) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

RF Exposure Conditions	Band	Mode	Frequency (MHz)	EUT Position	Separation Distance (mm)	Measured 1 g SAR (W/kg)	Repeated 1g SAR (W/kg)	Ratio
Hotspot	GSM 850	GPRS 4Tx	848.8	Rear	10	0.958	0.951	1.00

14. Measurement Uncertainty

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Standard 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.



Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0003 Page (110) of (323)	
--	---	---

15. Test Equipment Information

Test Platform	SPEAG DASY5 System SPEAG DASY6 System			
Version	DASY52: 52.10.4.1535 / SEMCAD: 14.6.14 (7501) DASY6: 16.0.2.136			
Location	Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea			
Manufacture	SPEAG			
Hardware Reference				
Equipment	Model	Serial Number	Date of Calibration	Due date of next Calibration
Shield Room	-	8F - 2	-	-
Shield Room	-	8F - 3		
Shield Room	-	8F - 4		
DASY5 Robot	TX90XL	F12/5L7FA1/A/01	-	-
DASY6 Robot	TX90XL speag	F/18/0004968/A/001	-	-
DASY6 Robot	TX60 L speag	F/19/0007289/A/001	-	-
Phantom	Twin SAM Phantom	1728	-	-
Phantom	Twin SAM Phantom	1975	-	-
Phantom	Twin SAM Phantom	1984	-	-
Phantom	2mm Oval Phantom ELI5	2098	-	-
Mounting Device	Mounting Device	-	-	-
DAE	DAE4	1342	2022-05-31	2023-05-31
DAE	DAE4	1567	2022-03-24	2023-03-24
DAE	DAE4	1586	2022-04-29	2023-04-29
Probe	EX3DV4	3928	2022-03-03	2023-03-03
Probe	EX3DV4	7540	2022-04-29	2023-04-29
Probe	EX3DV4	7770	2022-11-18	2023-11-18
ESG Vector Signal Generator	E4438C	MY42080845	2022-02-24	2023-02-24
Dual Power Meter	EPM-442A	GB37480680	2022-05-02	2023-05-02
Power Sensor	8481H	2703A11902	2022-05-02	2023-05-02
Power Sensor	8481H	3318A18090	2022-05-02	2023-05-02
Attenuator	8491A	21552	2022-05-02	2023-05-02
Attenuator	8491A	35560	2022-05-02	2023-05-02
Attenuator	8491A	35934	2022-05-02	2023-05-02
Dual Directional Coupler	772D	2839A160504	2022-05-02	2023-05-02
Dual Directional Coupler	778D	16059	2022-05-02	2023-05-02
Dual Directional Coupler	ZMDC-30-1+	F708102210	2022-12-14	2023-12-14
Power Amplifier	AMP2027	10010	2022-05-02	2023-05-02
Power Amplifier	TVA-R5-13A+	2202007	2022-12-14	2023-12-14
Low Pass Filter	NLP-1000+	VUU86701432	2022-05-02	2023-05-02
Low Pass Filter	VLF-1500+	31835	2022-05-02	2023-05-02
Low Pass Filter	VLF-3000+	31831	2022-05-02	2023-05-02
Low Pass Filter	VLF-6000+	31838	2022-05-02	2023-05-02
Confined Loop Antennas	CLA13	1019	2022-06-03	2024-06-03

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SPF0003 Page (111) of (323)	
--	--	---

Hardware Reference				
Equipment	Model	Serial Number	Date of Calibration	Due date of next Calibration
Dipole Validation Kits	D750V3	1183	2022-09-21	2024-09-24
Dipole Validation Kits	D850V2	1006	2022-04-26	2024-04-26
Dipole Validation Kits	D1750V2	1072	2022-04-27	2024-04-27
Dipole Validation Kits	D1900V2	5d160	2022-04-29	2024-04-29
Dipole Validation Kits	D2450V2	895	2022-07-15	2024-07-15
Dipole Validation Kits	D2600V2	1050	2022-07-15	2024-07-15
Dipole Validation Kits	D5GHzV2	1134	2022-01-27	2024-01-27
Network Analyzer	E5071B	MY42403524	2022-02-15	2023-02-15
Dielectric Assessment Kit	DAK-3.5	1078	2022-05-30	2023-05-30
Dielectric Assessment Kit	DAK-12	1165	2022-06-13	2023-06-13
Humidity/Temp	MHB-382SD	25737	2022-05-04	2023-05-04
Humidity/Temp	MHB-382SD	46301	2022-02-25	2023-02-25
Humidity/Temp	MHB-382SD	46307	2022-03-17	2023-03-17
Spectrum Analyzer	FSU	200008	2022-12-13	2023-12-13
Wideband Radio Communication Tester	CMW500	132120	2022-05-02	2023-05-02
Wideband Radio Communication Tester	CMW500	132423	2022-02-24	2023-02-24

16. Test System Verification Results

Eurofins KCTL Co.,Ltd.

Measurement Report for CLA13, FRONT, CLA13, UID 0 -, Channel 4 (13.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
CLA13, Speag	222.0 x 222.0 x 97.5	1019	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 0.00	CLA13	CW, 0--	13.0, 4	15.42	0.724	54.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-4-250 , 2023-Jan-13	EX3DV4 - SN3928, 2022-03-03	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	240.0 x 240.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	No
Grading Ratio	N/A	N/A
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-13	2023-01-13
psSAR1g [W/kg]	0.059	0.059
psSAR8g [W/kg]	0.049	0.038
psSAR10g [W/kg]	0.048	0.036
psAPD (1.0cm2, sq) [W/m2]		0.589
psAPD (4.0cm2, sq) [W/m2]		0.766
Power Drift [dB]		0.01

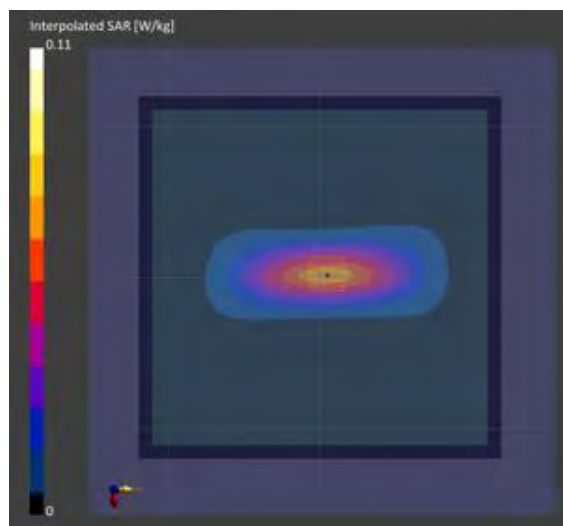

Date: 1/14/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [750 MHz Verification Input Power 250 mW 2023-01-14.da52:0](#)

DUT: Dipole 750 MHz D750V3, Type: D750V3, Serial: D750V3 - SN:1183

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.86 \text{ S/m}$; $\epsilon_r = 42.291$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7540;ConvF(10.25, 10.25, 10.25) @ 750 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/750 MHz Verification Input Power 250 mW 2023-01-14/Area Scan (7x13x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 2.63 W/kg

Configuration/750 MHz Verification Input Power 250 mW 2023-01-14/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 58.11 V/m; Power Drift = 0.00 dB
 Peak SAR (extrapolated) = 3.23 W/kg
SAR(1 g) = 2.12 W/kg; SAR(10 g) = 1.4 W/kg
 Maximum value of SAR (measured) = 2.85 W/kg

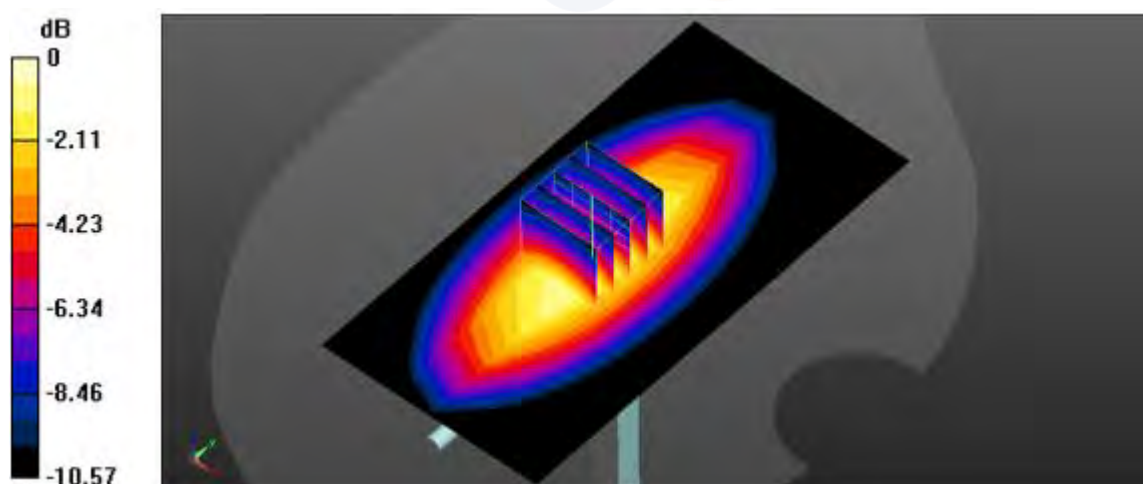

0 dB = 2.85 W/kg = 4.55 dBW/kg

Date: 1/16/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [750 MHz Verification Input Power 250 mW 2023-01-16.da52:0](#)

DUT: Dipole 750 MHz D750V3, Type: D750V3, Serial: D750V3 - SN:1183

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.87 \text{ S/m}$; $\epsilon_r = 42.132$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7540;ConvF(10.25, 10.25, 10.25) @ 750 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/750 MHz Verification Input Power 250 mW 2023-01-16/Area Scan (7x13x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 2.70 W/kg

Configuration/750 MHz Verification Input Power 250 mW 2023-01-16/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 58.13 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 3.34 W/kg
SAR(1 g) = 2.18 W/kg; SAR(10 g) = 1.43 W/kg
Maximum value of SAR (measured) = 2.95 W/kg

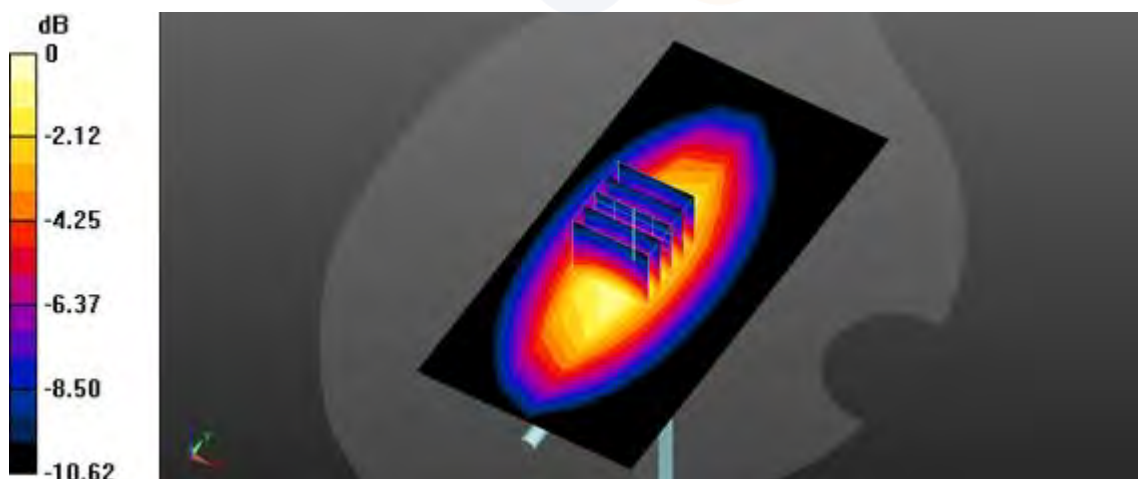

0 dB = 2.95 W/kg = 4.70 dBW/kg

Date: 1/11/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [850 MHz Verification Input Power 250 mW 2023-01-11.da52:0](#)

DUT: Dipole 850 MHz D850V2, Type: D850V2, Serial: D850V2 - SN:1006


Communication System: UID 0, CW (0); Frequency: 850 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 850 \text{ MHz}$; $\sigma = 0.914 \text{ S/m}$; $\epsilon_r = 42.529$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.73, 9.73, 9.73) @ 850 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

System Performance Check (without Area Scan)/850 MHz Verification Input Power 250 mW 2023-01-11/Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 3.53 W/kg

System Performance Check (without Area Scan)/850 MHz Verification Input Power 250 mW 2023-01-11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 64.66 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 3.99 W/kg
SAR(1 g) = 2.61 W/kg; SAR(10 g) = 1.7 W/kg
 Maximum value of SAR (measured) = 3.52 W/kg

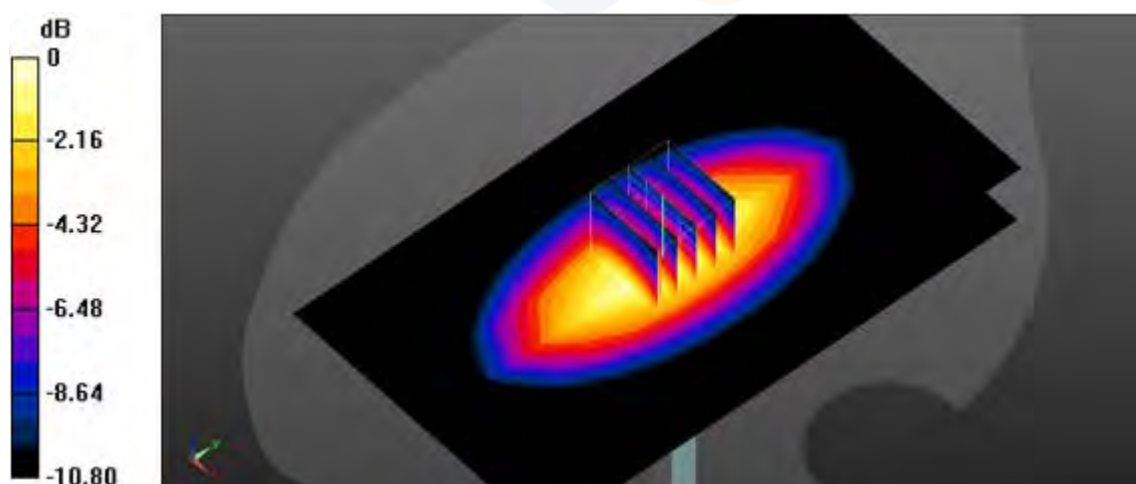

0 dB = 3.52 W/kg = 5.47 dBW/kg

Date: 1/12/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [850 MHz Verification Input Power 250 mW 2023-01-12.da52:0](#)

DUT: Dipole 850 MHz D850V2, Type: D850V2, Serial: D850V2 - SN:1006


Communication System: UID 0, CW (0); Frequency: 850 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 850 \text{ MHz}$; $\sigma = 0.896 \text{ S/m}$; $\epsilon_r = 41.824$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.73, 9.73, 9.73) @ 850 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

System Performance Check (without Area Scan)/850 MHz Verification Input Power 250 mW 2023-01-12/Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 3.39 W/kg

System Performance Check (without Area Scan)/850 MHz Verification Input Power 250 mW 2023-01-12/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 64.62 V/m; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 3.90 W/kg
SAR(1 g) = 2.53 W/kg; SAR(10 g) = 1.65 W/kg
 Maximum value of SAR (measured) = 3.43 W/kg

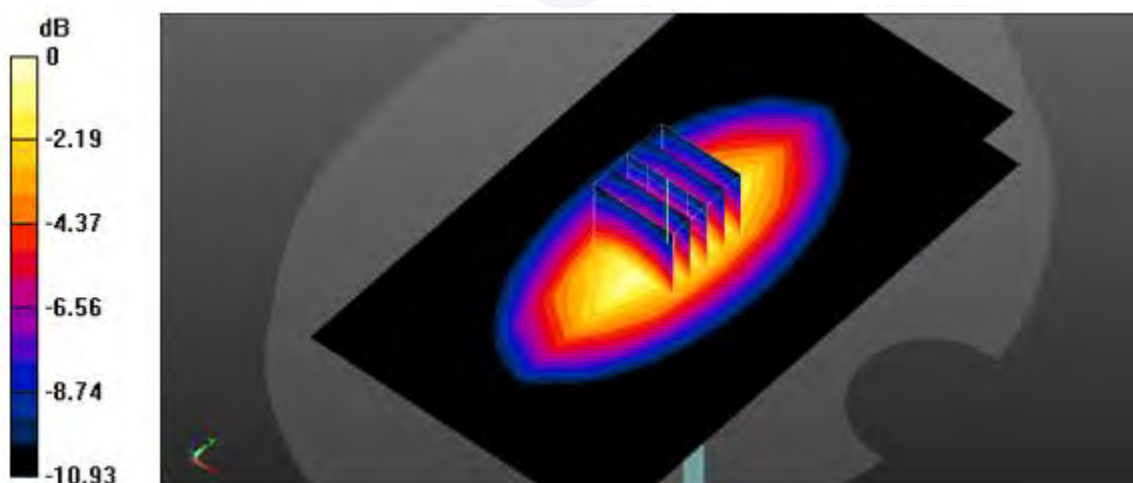

0 dB = 3.43 W/kg = 5.35 dBW/kg

Date: 1/13/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [850 MHz Verification Input Power 250 mW 2023-01-13.da52:0](#)

DUT: Dipole 850 MHz D850V2, Type: D850V2, Serial: D850V2 - SN:1006


Communication System: UID 0, CW (0); Frequency: 850 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 850 \text{ MHz}$; $\sigma = 0.883 \text{ S/m}$; $\epsilon_r = 42.128$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.73, 9.73, 9.73) @ 850 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

System Performance Check (without Area Scan)/850 MHz Verification Input Power 250 mW 2023-01-13/Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 3.35 W/kg

System Performance Check (without Area Scan)/850 MHz Verification Input Power 250 mW 2023-01-13/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 64.15 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 3.83 W/kg
SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.61 W/kg
 Maximum value of SAR (measured) = 3.37 W/kg

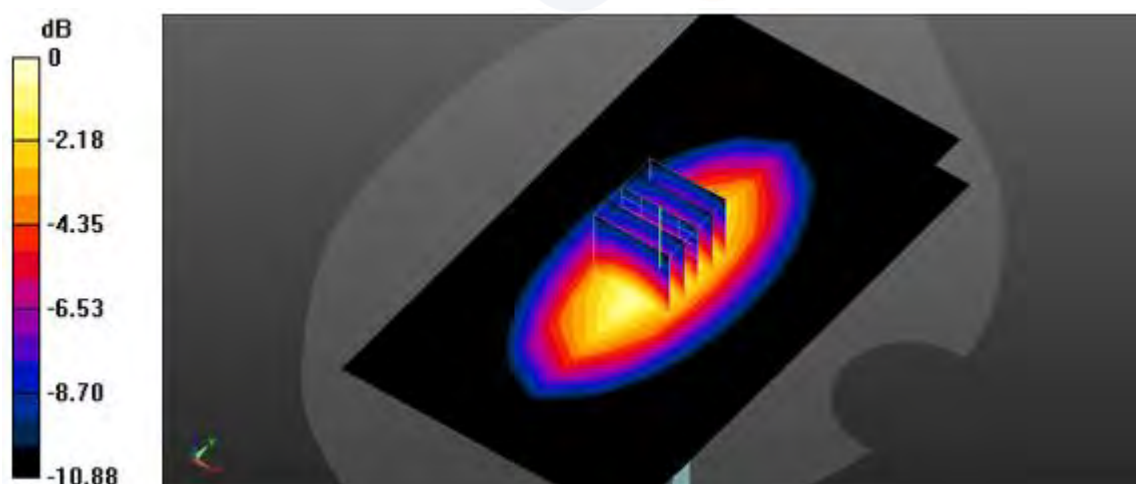

0 dB = 3.37 W/kg = 5.28 dBW/kg

Date: 1/9/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [1750 MHz Verification Input Power 250 mW 2023-01-09.da52:0](#)

DUT: Dipole 1750 MHz D1750V2, Type: D1750V2, Serial: D1750V2 - SN:1072

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.343$ S/m; $\epsilon_r = 38.448$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7540;ConvF(8.62, 8.62, 8.62) @ 1750 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/1750 MHz Verification Input Power 250 mW 2023-01-09/Area Scan (8x11x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 12.8 W/kg

Configuration/1750 MHz Verification Input Power 250 mW 2023-01-09/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 101.4 V/m; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 17.1 W/kg
SAR(1 g) = 9.23 W/kg; SAR(10 g) = 4.91 W/kg
 Maximum value of SAR (measured) = 14.3 W/kg

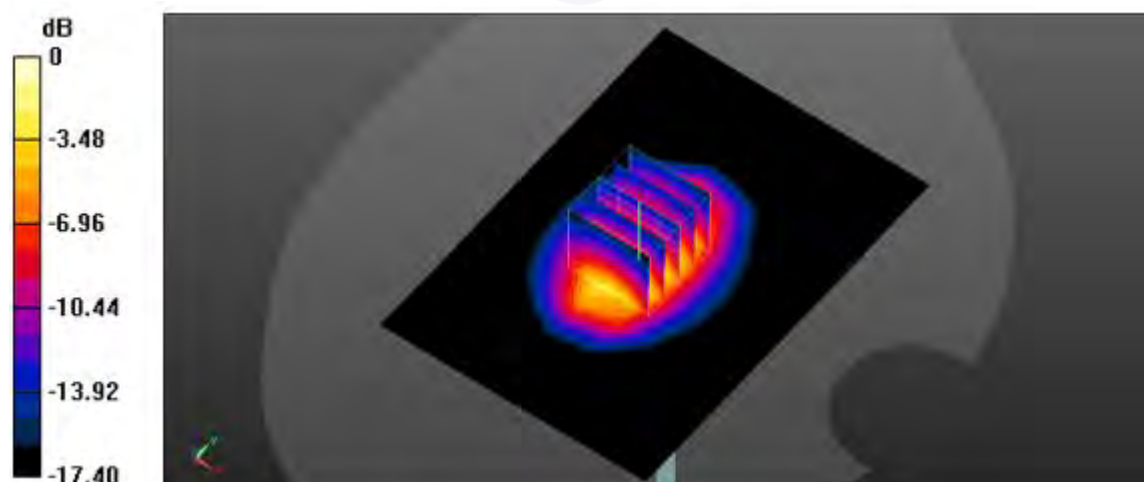

0 dB = 14.3 W/kg = 11.55 dBW/kg

Date: 1/10/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [1750 MHz Verification Input Power 250 mW 2023-01-10.da52:0](#)

DUT: Dipole 1750 MHz D1750V2, Type: D1750V2, Serial: D1750V2 - SN:1072

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 38.483$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7540;ConvF(8.62, 8.62, 8.62) @ 1750 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/1750 MHz Verification Input Power 250 mW 2023-01-10/Area Scan (8x11x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 13.1 W/kg

Configuration/1750 MHz Verification Input Power 250 mW 2023-01-10/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 102.3 V/m; Power Drift = 0.07 dB
 Peak SAR (extrapolated) = 17.8 W/kg
SAR(1 g) = 9.57 W/kg; SAR(10 g) = 5.08 W/kg
 Maximum value of SAR (measured) = 14.8 W/kg

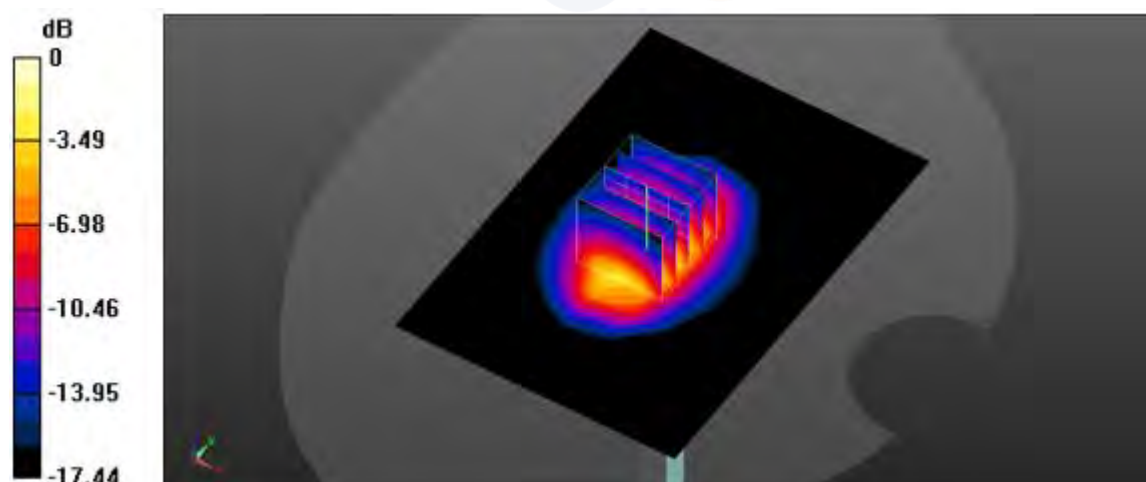

0 dB = 14.8 W/kg = 11.70 dBW/kg

Date: 1/5/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [1900 MHz Verification Input Power 250 mW 2023-01-05.da52:0](#)

DUT: Dipole 1900 MHz D1900V2, Type: D1900V2, Serial: D1900V2 - SN:5d160

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 40.069$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7540;ConvF(8.55, 8.55, 8.55) @ 1900 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/1900 MHz Verification Input Power 250 mW 2023-01-05/Area Scan (7x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 14.2 W/kg

Configuration/1900 MHz Verification Input Power 250 mW 2023-01-05/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 105.1 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 19.2 W/kg
SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.22 W/kg
Maximum value of SAR (measured) = 15.9 W/kg

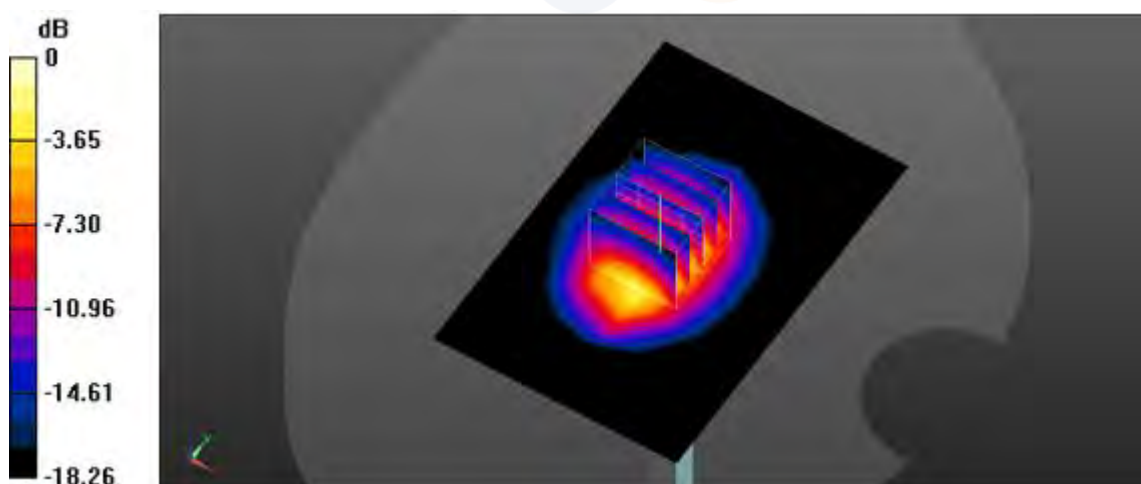

0 dB = 15.9 W/kg = 12.01 dBW/kg

Date: 1/6/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [1900 MHz Verification Input Power 250 mW 2023-01-06.da52:0](#)

DUT: Dipole 1900 MHz D1900V2, Type: D1900V2, Serial: D1900V2 - SN:5d160

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 40.095$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7540;ConvF(8.55, 8.55, 8.55) @ 1900 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/1900 MHz Verification Input Power 250 mW 2023-01-06/Area Scan (7x10x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 13.6 W/kg

Configuration/1900 MHz Verification Input Power 250 mW 2023-01-06/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 103.7 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 18.8 W/kg
SAR(1 g) = 9.92 W/kg; SAR(10 g) = 5.12 W/kg
 Maximum value of SAR (measured) = 15.6 W/kg

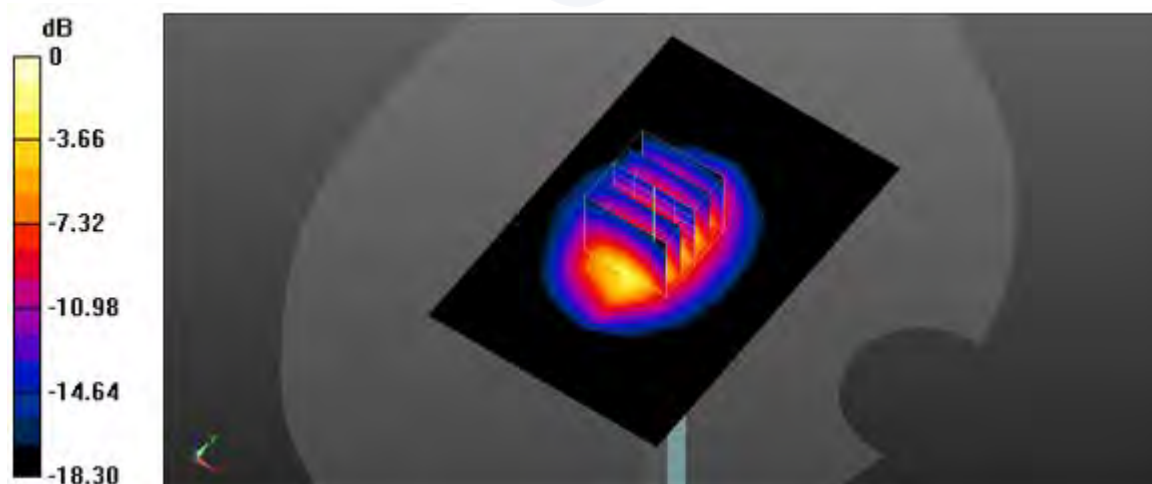

0 dB = 15.6 W/kg = 11.93 dBW/kg

Date: 1/9/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [2450 MHz Verification Input Power 100 mW 2023-01-09.da5:0](#)

DUT: Dipole 2450 MHz D2450V2, Type: D2450V2, Serial: D2450V2 - SN:895

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.804$ S/m; $\epsilon_r = 38.105$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928;ConvF(7.46, 7.46, 7.46) @ 2450 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/2450 MHz Verification Input Power 100 mW 2023-01-09/Area Scan (10x11x1):

Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 8.65 W/kg

Configuration/2450 MHz Verification Input Power 100 mW 2023-01-09/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 63.22 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 11.1 W/kg

SAR(1 g) = 5.32 W/kg; SAR(10 g) = 2.47 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 8.87 W/kg

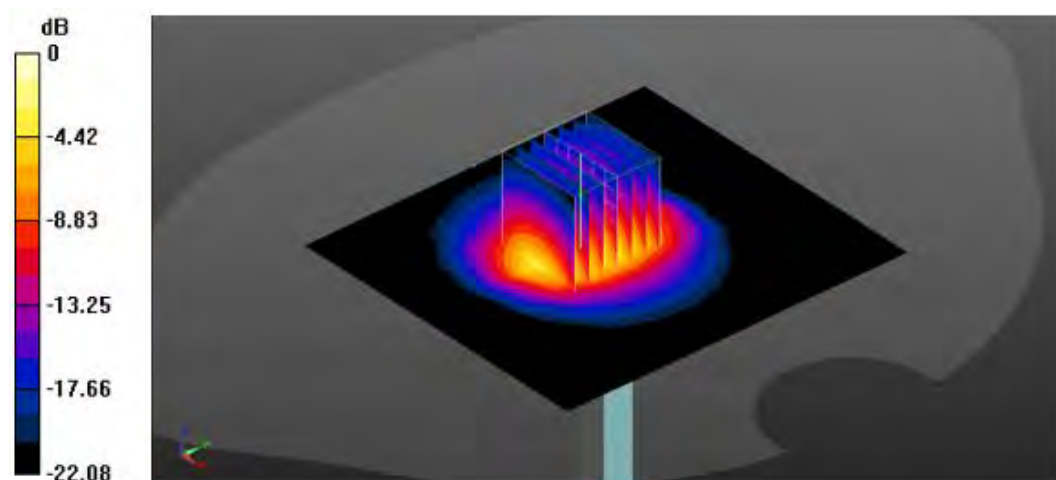

0 dB = 8.87 W/kg = 9.48 dBW/kg

Date: 2023-01-14

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [2600 MHz Verification Input Power 100 mW 2023-01-14.da5:0](#)

DUT: Dipole 2600 MHz D2600V2, Type: D2600V2, Serial: D2600V2 - SN:1050

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 38.691$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7770;ConvF(6.94, 6.94, 6.94) @ 2600 MHz; Calibrated: 2022-11-18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1567; Calibrated: 2022-03-24
- Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1728
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/2600 MHz Verification Input Power 100 mW 2023-01-14/Area Scan (10x11x1):

Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 7.49 W/kg

Configuration/2600 MHz Verification Input Power 100 mW 2023-01-14/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 72.02 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 12.2 W/kg
SAR(1 g) = 5.57 W/kg; SAR(10 g) = 2.49 W/kg
Maximum value of SAR (measured) = 9.66 W/kg

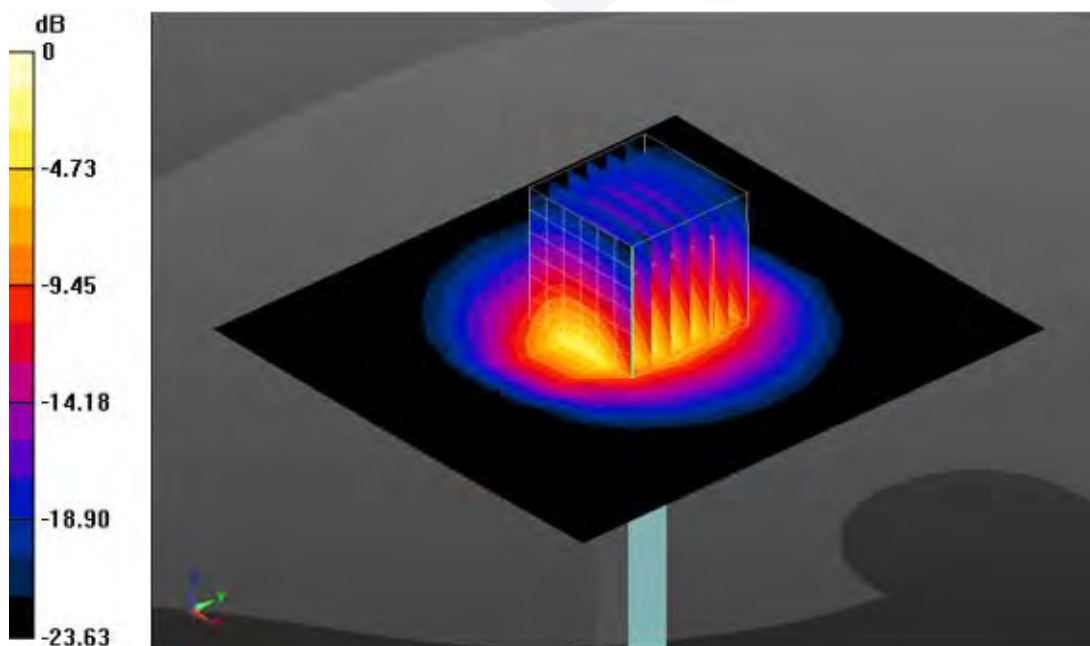

0 dB = 9.66 W/kg = 9.85 dBW/kg

Date: 1/10/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [5250 MHz Verification Input Power 100 mW 2023-01-10.da5:0](#)

DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1134

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.685$ S/m; $\epsilon_r = 34.995$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928;ConvF(5.16, 5.16, 5.16) @ 5250 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5250 MHz Verification Input Power 100 mW 2023-01-10/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 18.3 W/kg

Configuration/5250 MHz Verification Input Power 100 mW 2023-01-10/Zoom Scan (8x8x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm


Reference Value = 58.24 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 36.5 W/kg

SAR(1 g) = 7.9 W/kg; SAR(10 g) = 2.25 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 20.8 W/kg

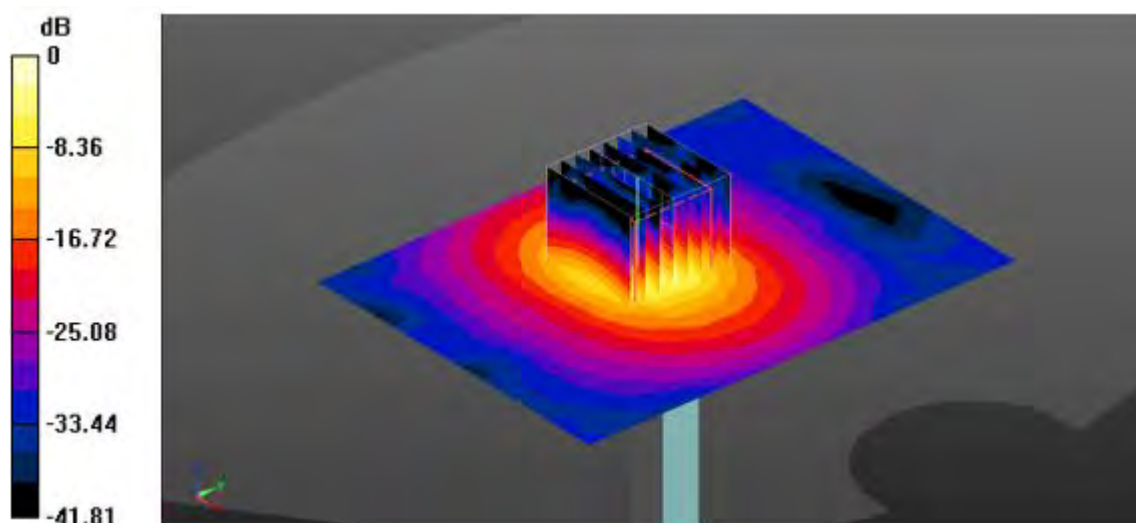

0 dB = 20.8 W/kg = 13.18 dBW/kg

Date: 1/14/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [5250 MHz Verification Input Power 100 mW 2023-01-14.da5:0](#)

DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1134

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.569$ S/m; $\epsilon_r = 36.069$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(5.16, 5.16, 5.16) @ 5250 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5250 MHz Verification Input Power 100 mW 2023-01-14/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 18.9 W/kg

Configuration/5250 MHz Verification Input Power 100 mW 2023-01-14/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm


Reference Value = 66.78 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 38.1 W/kg

SAR(1 g) = 8.03 W/kg; SAR(10 g) = 2.28 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 21.6 W/kg

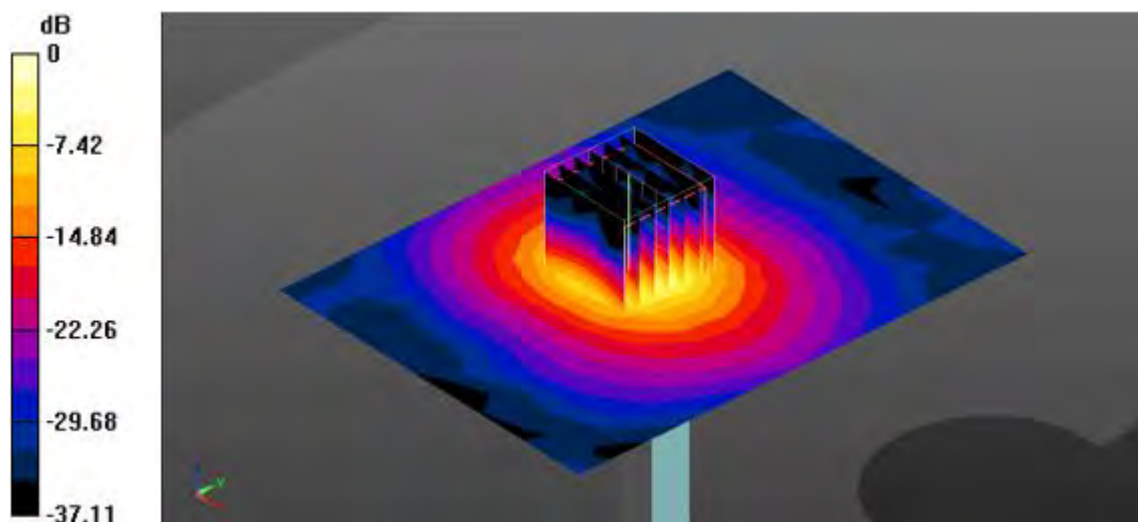

0 dB = 21.6 W/kg = 13.34 dBW/kg

Date: 1/11/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [5600 MHz Verification Input Power 100 mW 2023-01-11.da5:0](#)

DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1134

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5600$ MHz; $\sigma = 4.987$ S/m; $\epsilon_r = 34.364$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3928;ConvF(4.69, 4.69, 4.69) @ 5600 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5600 MHz Verification Input Power 100 mW 2023-01-11/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 19.2 W/kg

Configuration/5600 MHz Verification Input Power 100 mW 2023-01-11/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 59.07 V/m; Power Drift = 0.11 dB
 Peak SAR (extrapolated) = 39.3 W/kg
SAR(1 g) = 8.53 W/kg; SAR(10 g) = 2.43 W/kg
 Maximum value of SAR (measured) = 22.7 W/kg

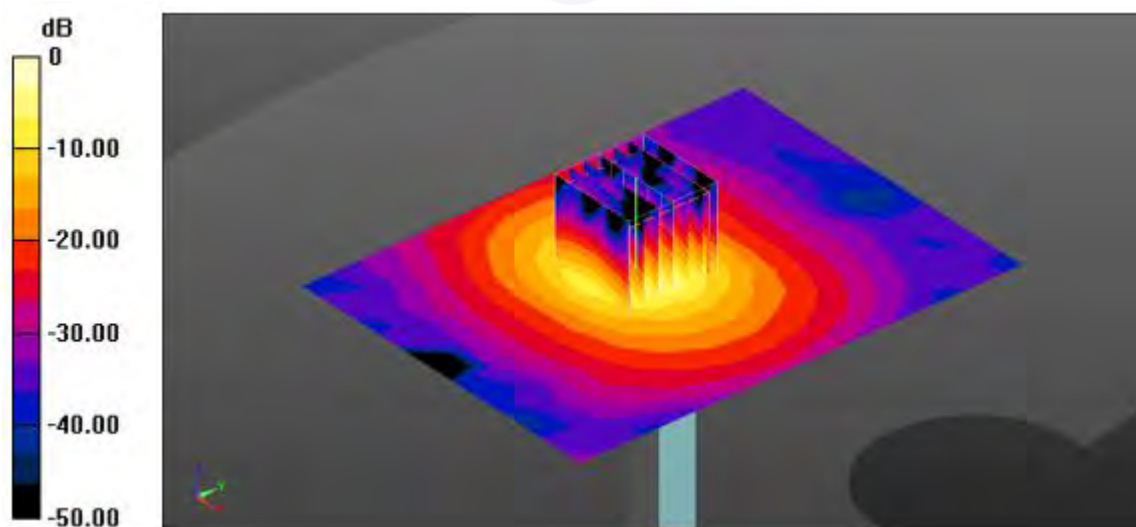

0 dB = 22.7 W/kg = 13.56 dBW/kg

Date: 1/14/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [5600 MHz Verification Input Power 100 mW 2023-01-14.da5:0](#)

DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1134

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 4.898$ S/m; $\epsilon_r = 35.482$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3928;ConvF(4.69, 4.69, 4.69) @ 5600 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5600 MHz Verification Input Power 100 mW 2023-01-14/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 19.7 W/kg

Configuration/5600 MHz Verification Input Power 100 mW 2023-01-14/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 65.98 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 39.7 W/kg
SAR(1 g) = 8.44 W/kg; SAR(10 g) = 2.4 W/kg
Maximum value of SAR (measured) = 22.4 W/kg

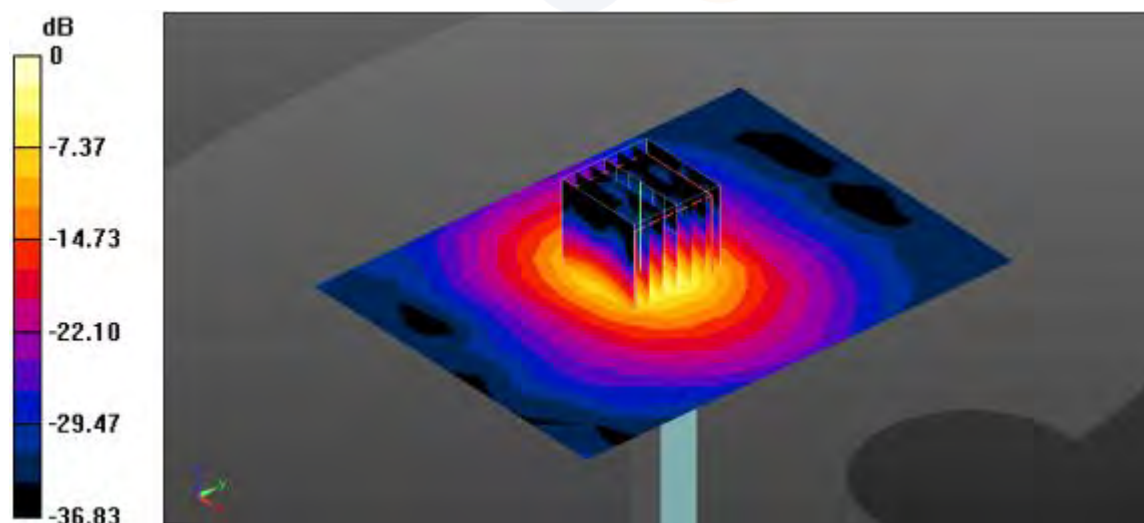

0 dB = 22.4 W/kg = 13.50 dBW/kg

Date: 1/12/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [5800 MHz Verification Input Power 100 mW 2023-01-12.da5:0](#)

DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1134

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.179 \text{ S/m}$; $\epsilon_r = 33.843$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3928;ConvF(4.65, 4.65, 4.65) @ 5800 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5800 MHz Verification Input Power 100 mW 2023-01-12/Area Scan (10x13x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 18.5 W/kg

Configuration/5800 MHz Verification Input Power 100 mW 2023-01-12/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$
 Reference Value = 55.66 V/m; Power Drift = 0.09 dB
 Peak SAR (extrapolated) = 37.1 W/kg
SAR(1 g) = 7.93 W/kg; SAR(10 g) = 2.27 W/kg
 Maximum value of SAR (measured) = 21.0 W/kg

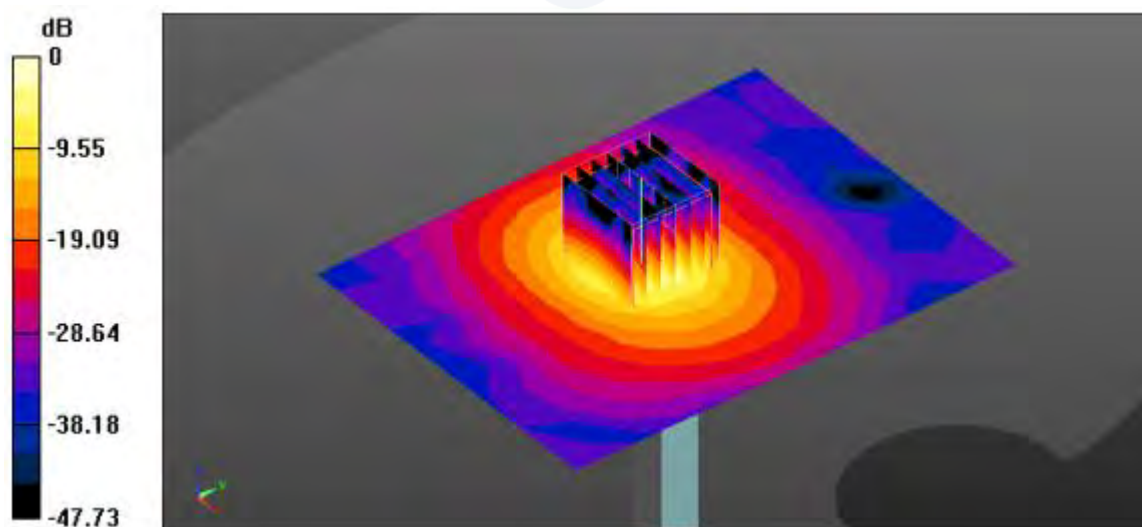

0 dB = 21.0 W/kg = 13.22 dBW/kg

Date: 1/14/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [5800 MHz Verification Input Power 100 mW 2023-01-14.da5:0](#)

DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1134

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5800$ MHz; $\sigma = 5.099$ S/m; $\epsilon_r = 35.136$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3928;ConvF(4.65, 4.65, 4.65) @ 5800 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/5800 MHz Verification Input Power 100 mW 2023-01-14/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 19.1 W/kg

Configuration/5800 MHz Verification Input Power 100 mW 2023-01-14/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 62.79 V/m; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 37.5 W/kg
SAR(1 g) = 8.07 W/kg; SAR(10 g) = 2.29 W/kg
 Maximum value of SAR (measured) = 21.3 W/kg

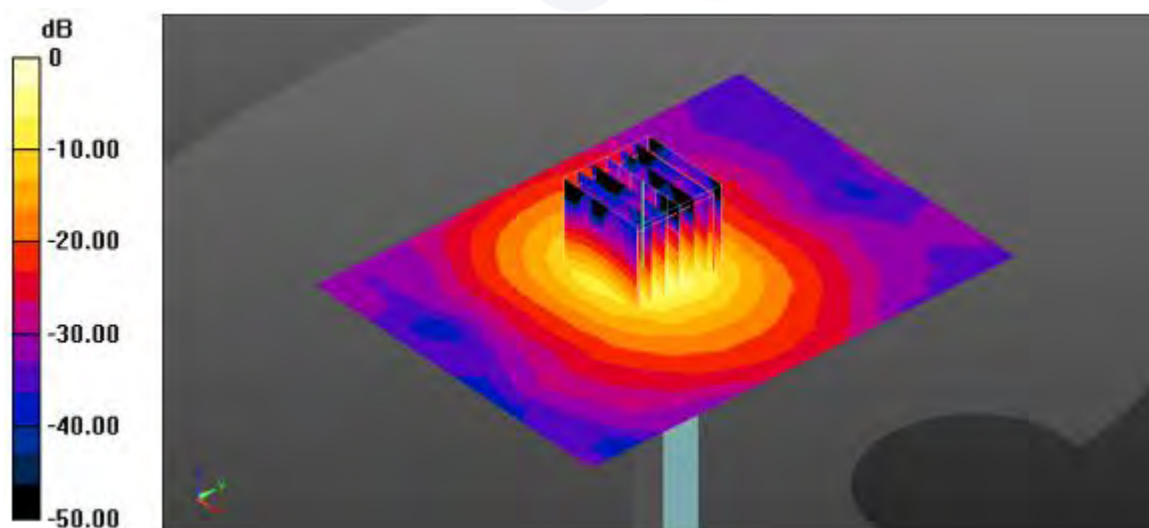

0 dB = 21.3 W/kg = 13.28 dBW/kg

17. Test Results

1)

Date: 1/11/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: 1. GSM850 Head.da53:0

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, GSM850_4TX (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.07491

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.603$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.73, 9.73, 9.73) @ 836.6 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/GSM850_GPRS 4Tx_CH190_Right Cheek/Area Scan (9x13x1): Measurement grid:
dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.362 W/kg


Configuration/GSM850_GPRS 4Tx_CH190_Right Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.47 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.250 W/kg

Maximum value of SAR (measured) = 0.379 W/kg

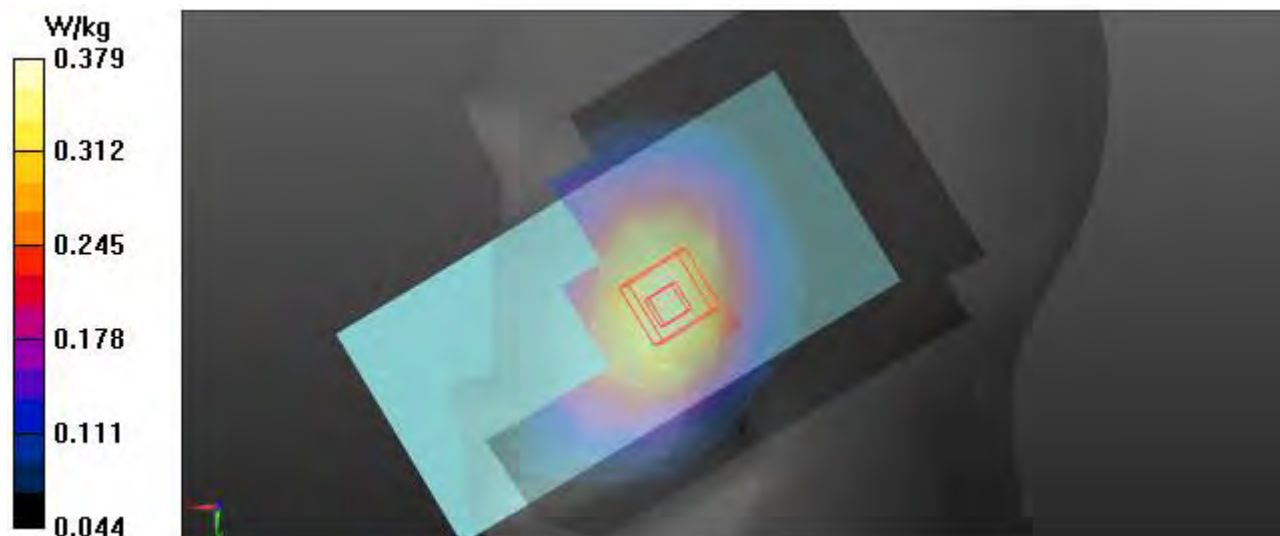

2)

Date: 1/5/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [1. GSM1900 Head.da53:1](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, GSM1900_4TX (0); Frequency: 1880 MHz; Duty Cycle: 1:2.07491

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.361$ S/m; $\epsilon_r = 40.093$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.55, 8.55, 8.55) @ 1880 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/GSM1900_GPRS 4Tx_CH661_Left Cheek/Area Scan (9x13x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.249 W/kg

Configuration 2/GSM1900_GPRS 4Tx_CH661_Left Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.075 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.309 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.265 W/kg

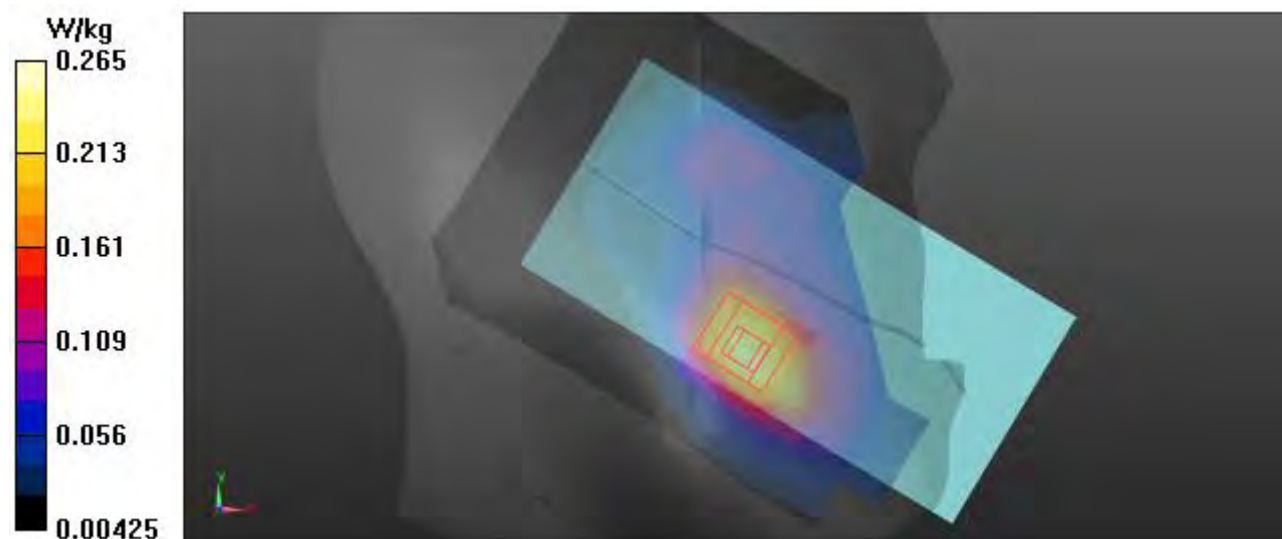

3)

Date: 1/5/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [1. WCDMA II Head.da53:1](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, W-CDMA 1900 (Band 2) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.361$ S/m; $\epsilon_r = 40.093$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.55, 8.55, 8.55) @ 1880 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/WCDMA II _CH9400 _Left Cheek/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.295 W/kg

Configuration 2/WCDMA II _CH9400 _Left Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.37 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.348 W/kg

SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.295 W/kg

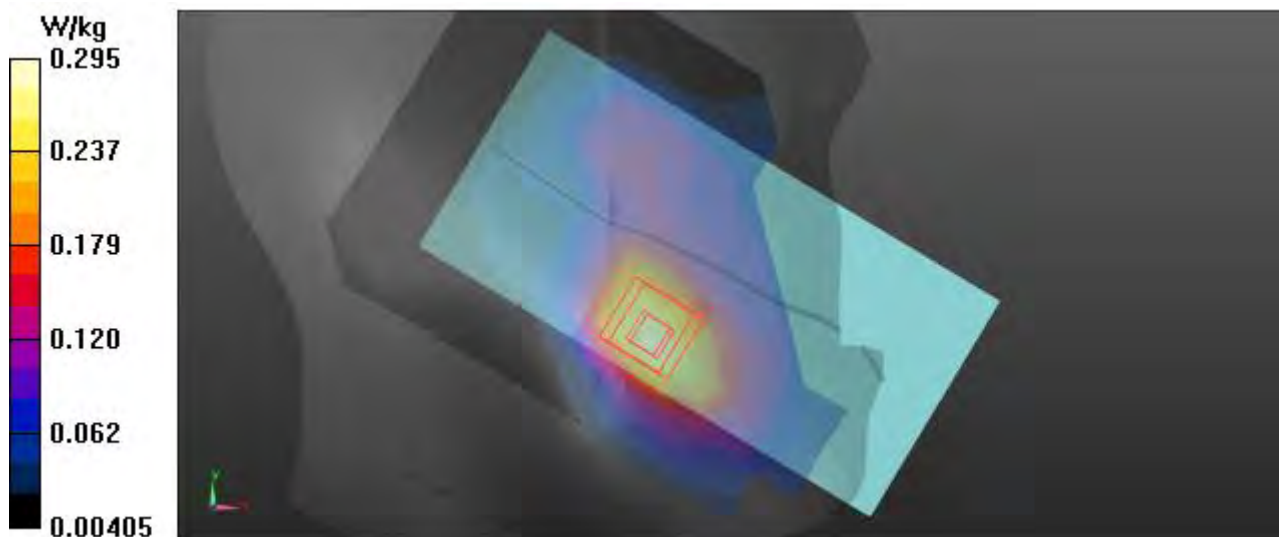

4)

Date: 1/9/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [1. WCDMA IV Head.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K


Communication System: UID 0, W-CDMA 1750 (Band 4) (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.4 \text{ MHz}$; $\sigma = 1.332 \text{ S/m}$; $\epsilon_r = 38.515$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.62, 8.62, 8.62) @ 1732.4 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/WCDMA IV _CH1412_Right Cheek/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.223 W/kg

Configuration/WCDMA IV _CH1412_Right Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 12.73 V/m; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 0.254 W/kg
SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.112 W/kg
 Maximum value of SAR (measured) = 0.221 W/kg

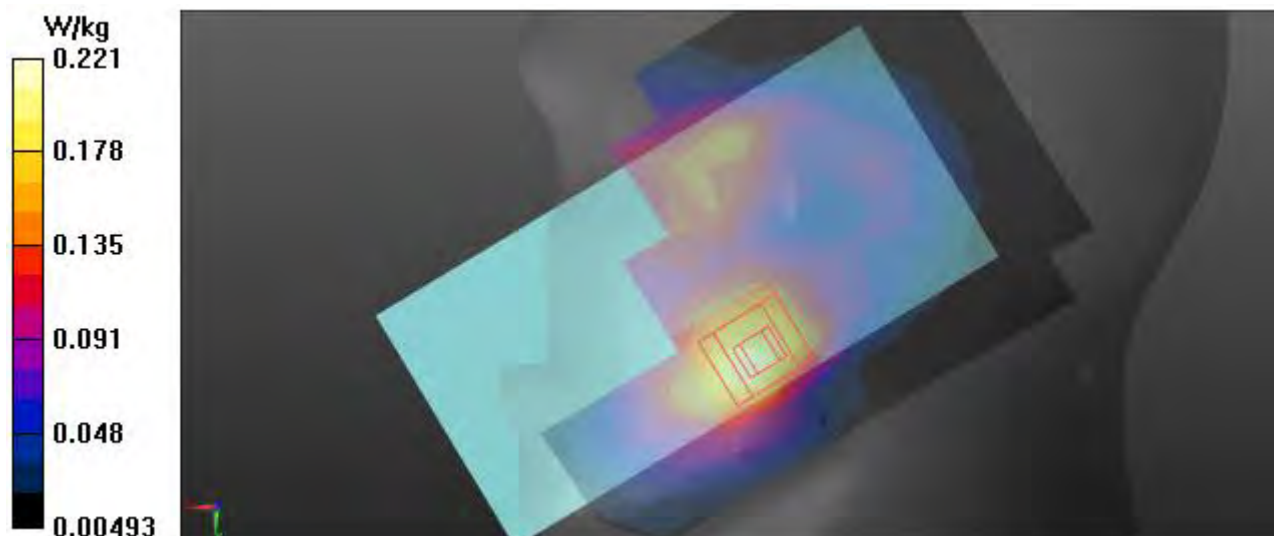

5)

Date: 1/11/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [1. WCDMA V Head.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, W-CDMA 850 (Band 5) (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.603$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.73, 9.73, 9.73) @ 836.6 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/WCDMA V _CH4183_Right Cheek/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.298 W/kg


Configuration/WCDMA V _CH4183_Right Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.60 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.327 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 0.303 W/kg

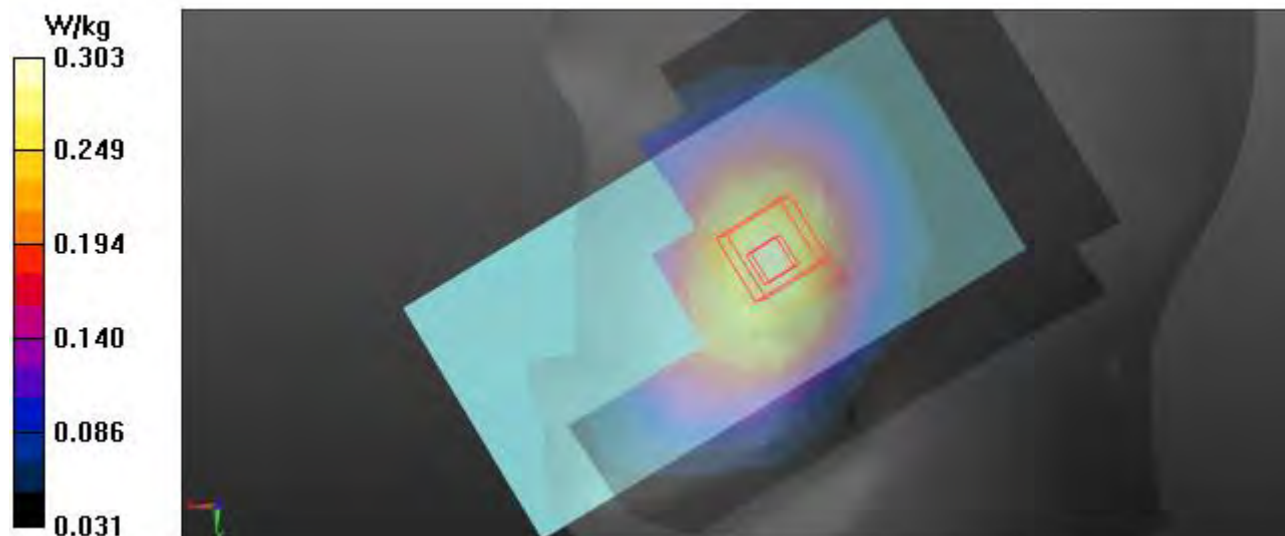

6)

Date: 1/6/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: **1. LTE Band 2_QPSK_20 MHz_Head.da53:1**

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, LTE Band 2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.371 \text{ S/m}$; $\epsilon_r = 40.128$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.55, 8.55, 8.55) @ 1880 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/LTE Band 2_QPSK_20 MHz_1 RB_49Offset_CH18900_Left Cheek/Area Scan

(9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.295 W/kg

Configuration 2/LTE Band 2_QPSK_20 MHz_1 RB_49Offset_CH18900_Left Cheek/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.290 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.340 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.290 W/kg

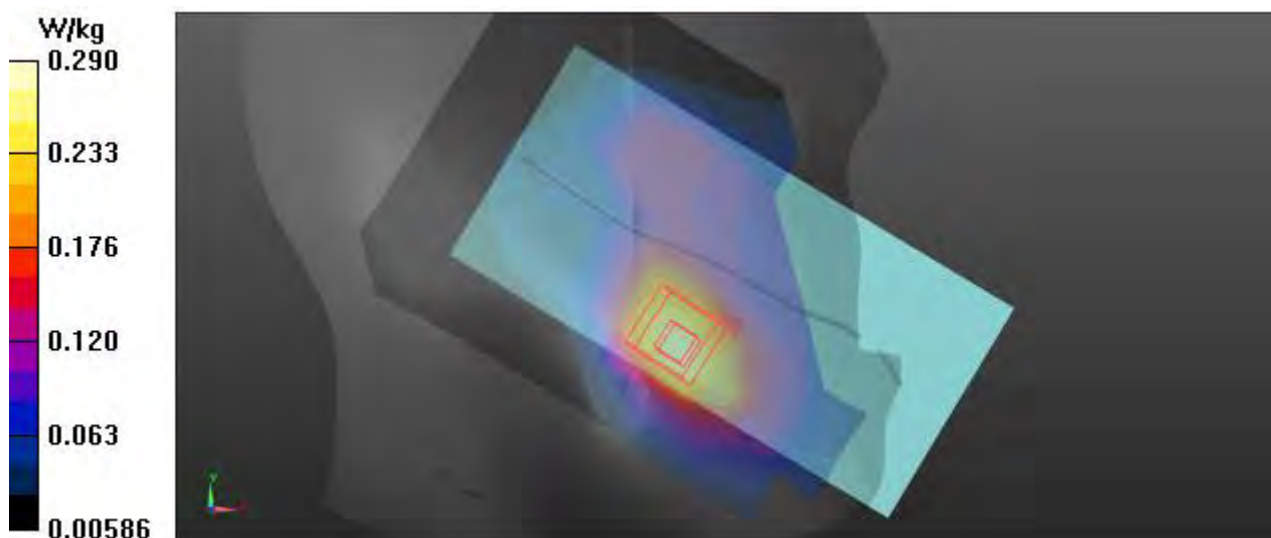

7)

Date: 1/12/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [1. LTE Band 5_QPSK_10 MHz_Head.da53:1](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.896$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.73, 9.73, 9.73) @ 836.5 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/LTE Band 5_QPSK_10 MHz_1 RB_49Offset_CH20525_Left Cheek/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.310 W/kg

Configuration 2/LTE Band 5_QPSK_10 MHz_1 RB_49Offset_CH20525_Left Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 17.27 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.326 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.198 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.300 W/kg

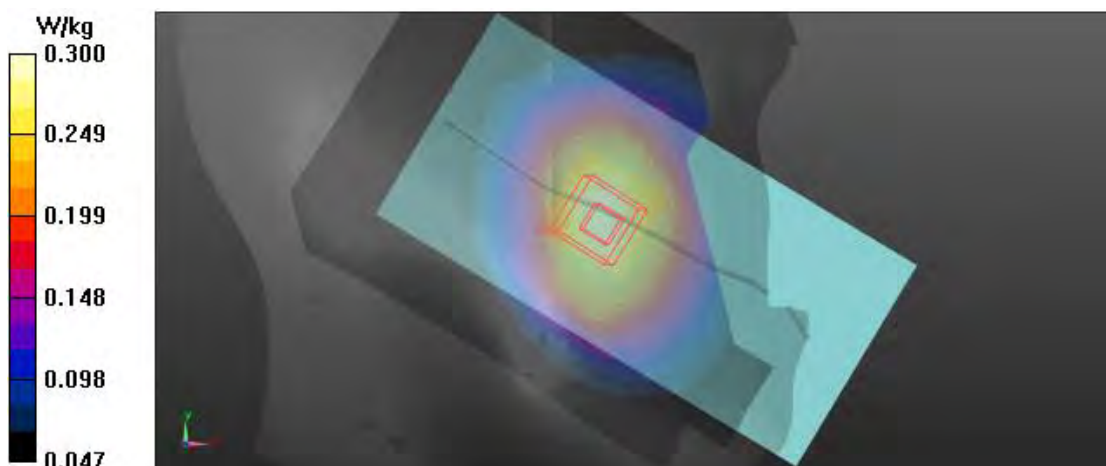

8)

Date: 1/14/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: **1. LTE Band 12 QPSK 10 MHz Head.da53:0**

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5 \text{ MHz}$; $\sigma = 0.882 \text{ S/m}$; $\epsilon_r = 43.248$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(10.25, 10.25, 10.25) @ 707.5 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/LTE Band 12_QPSK_10 MHz_1 RB_49Offset_CH23095_Right Cheek/Area Scan

(9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.208 W/kg

Configuration/LTE Band 12_QPSK_10 MHz_1 RB_49Offset_CH23095_Right Cheek/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.965 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.149 W/kg

Maximum value of SAR (measured) = 0.220 W/kg

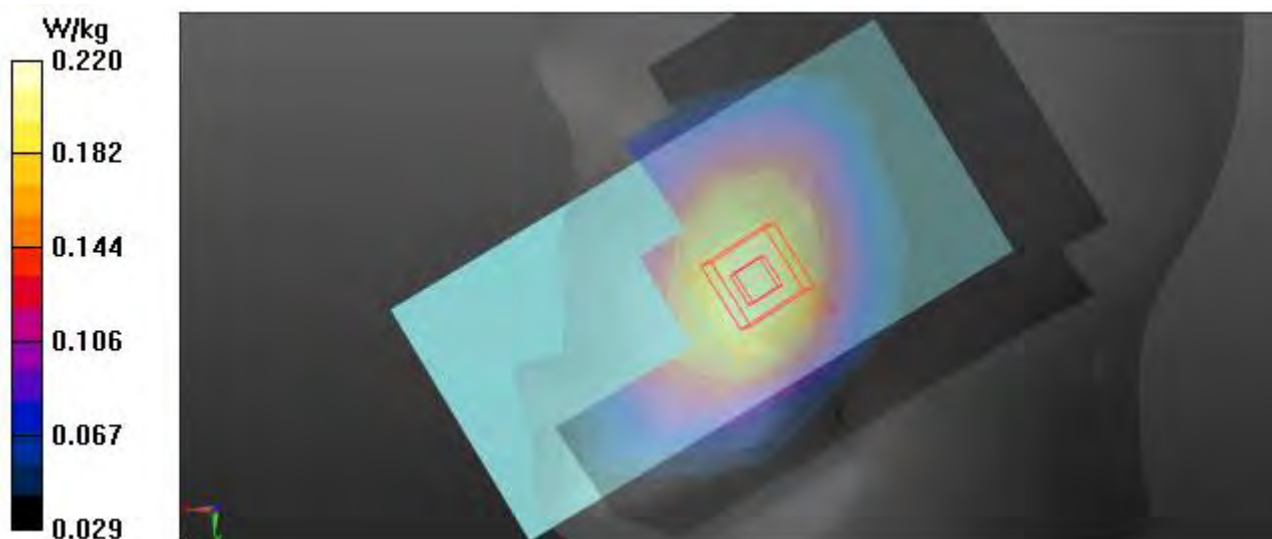

9)

Date: 1/16/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [1. LTE Band 13_QPSK_10 MHz_Head.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.893 \text{ S/m}$; $\epsilon_r = 41.579$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(10.25, 10.25, 10.25) @ 782 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/LTE Band 13_QPSK_10 MHz_1 RB_0Offset_CH23230_Right Cheek/Area Scan

(9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.192 W/kg

Configuration/LTE Band 13_QPSK_10 MHz_1 RB_0Offset_CH23230_Right Cheek/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.951 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.208 W/kg

SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.196 W/kg

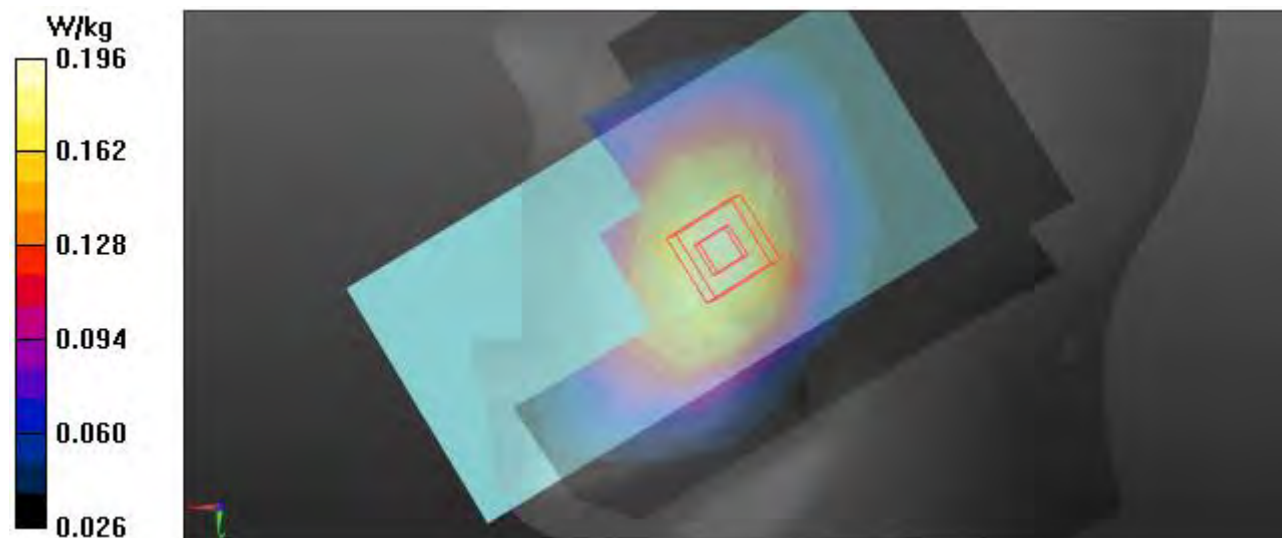

10)

Date: 1/13/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [1. LTE Band 26_QPSK_15 MHz_Head.da53:1](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E31720C5337ECE

Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 42.204$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.73, 9.73, 9.73) @ 831.5 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/LTE Band 26_QPSK_15 MHz_1 RB_36Offset_CH26865_Left Cheek/Area Scan

(9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.181 W/kg

Configuration 2/LTE Band 26_QPSK_15 MHz_1 RB_36Offset_CH26865_Left Cheek/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.622 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.177 W/kg

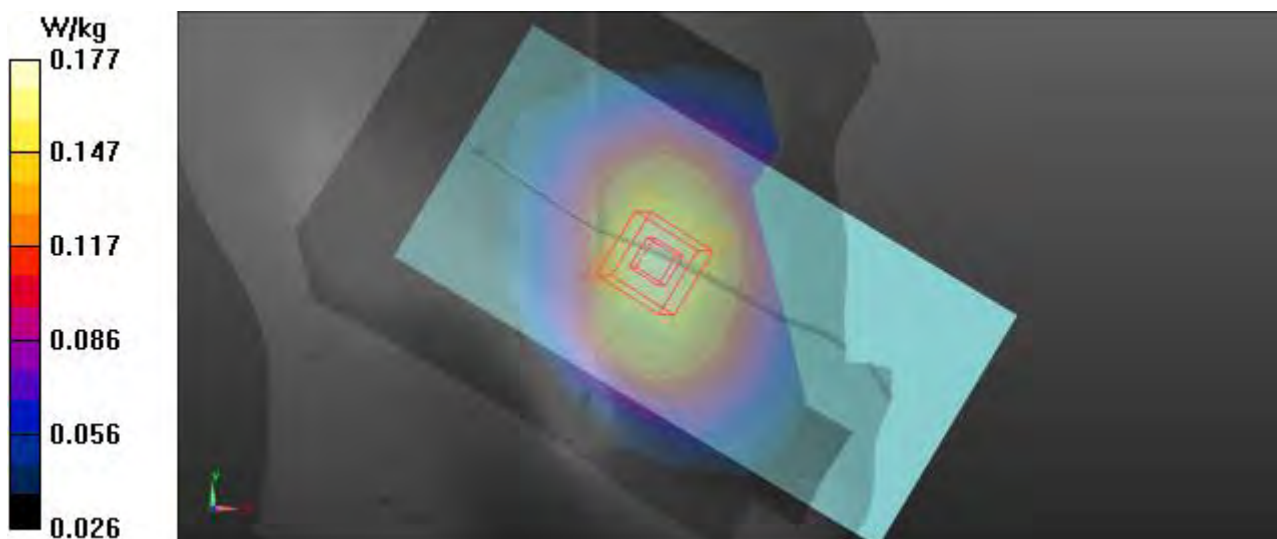

11)

Date: 2023-01-14

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [1. LTE Band 41_QPSK_20 MHz_Head.da53:1](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172086337ECE

Communication System: UID 0, LTE Band 41 (0); Frequency: 2506 MHz; Duty Cycle: 1:1.58016
Medium parameters used (interpolated): $f = 2506$ MHz; $\sigma = 1.881$ S/m; $\epsilon_r = 38.793$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7770;ConvF(6.94, 6.94, 6.94) @ 2506 MHz; Calibrated: 2022-11-18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1567; Calibrated: 2022-03-24
- Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1728
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/LTE Band 41_QPSK_20 MHz_1RB_49Offset_CH39750_Left Cheek/Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.321 W/kg

Configuration 2/LTE Band 41_QPSK_20 MHz_1RB_49Offset_CH39750_Left Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 11.95 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.113 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.338 W/kg

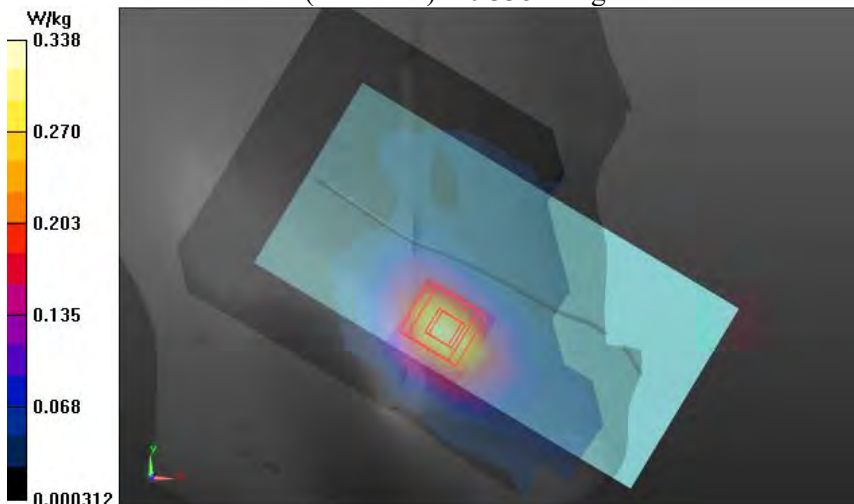

12)

Date: 1/10/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [1. LTE Band 66_QPSK_20 MHz_Head.da53:1](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, LTE Band 66 (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 38.46$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.62, 8.62, 8.62) @ 1770 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 2/LTE Band 66_QPSK_20 MHz_1 RB_49Offset_CH132572_Left Cheek/Area Scan

(9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.235 W/kg

Configuration 2/LTE Band 66_QPSK_20 MHz_1 RB_49Offset_CH132572_Left Cheek/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.457 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.269 W/kg

SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.231 W/kg

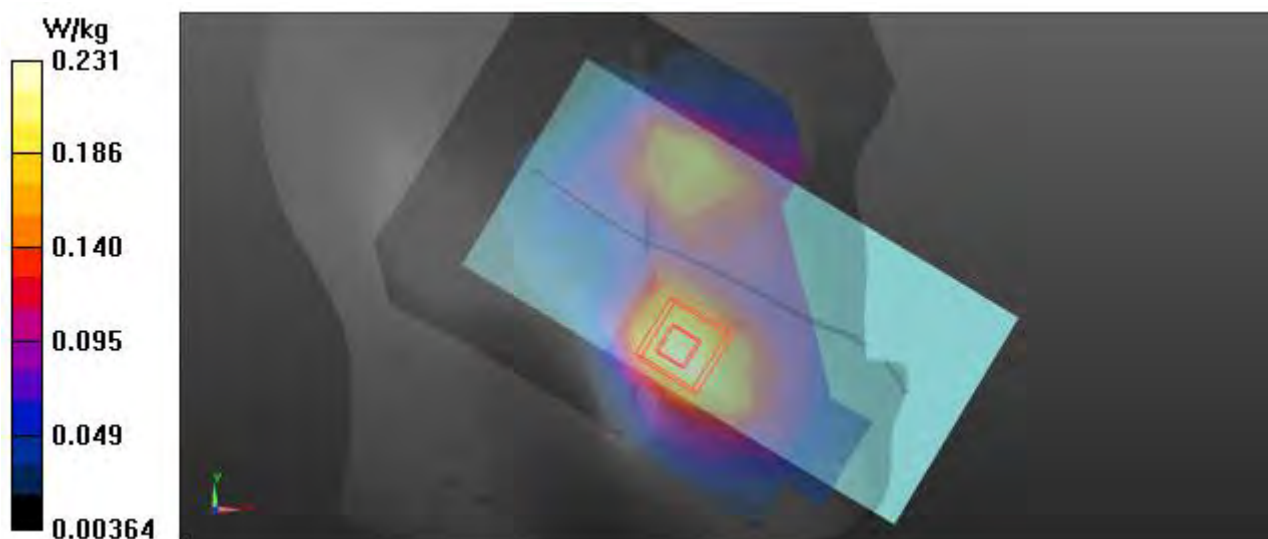

13)

Date: 1/9/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [1. WLAN 2.4 GHz Head.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172167337ECE

Communication System: UID 0, 2.4GWLAN (0); Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.792$ S/m; $\epsilon_r = 38.136$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928;ConvF(7.46, 7.46, 7.46) @ 2437 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11_b_CH6_Right Cheek/Area Scan (12x16x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.388 W/kg

Configuration/802.11_b_CH6_Right Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 13.95 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.109 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.386 W/kg

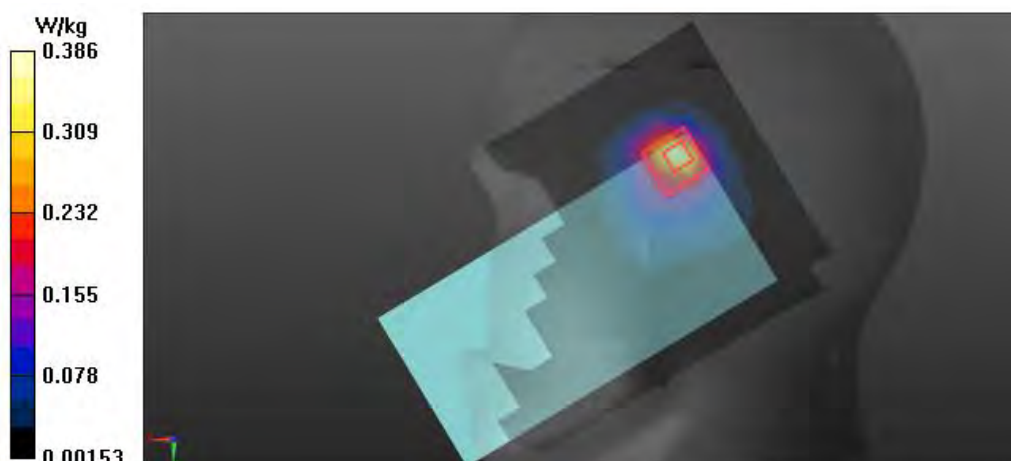

14)

Date: 1/14/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [1. WLAN 5.3 GHz Head.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172167337ECE

Communication System: UID 0, 5GWLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 4.607$ S/m; $\epsilon_r = 36.002$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928;ConvF(5.16, 5.16, 5.16) @ 5290 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11_ac_VHT80_CH58_Right Tilt/Area Scan (12x17x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.618 W/kg

Configuration/802.11_ac_VHT80_CH58_Right Tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=1.4mm


Reference Value = 6.295 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.087 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.792 W/kg

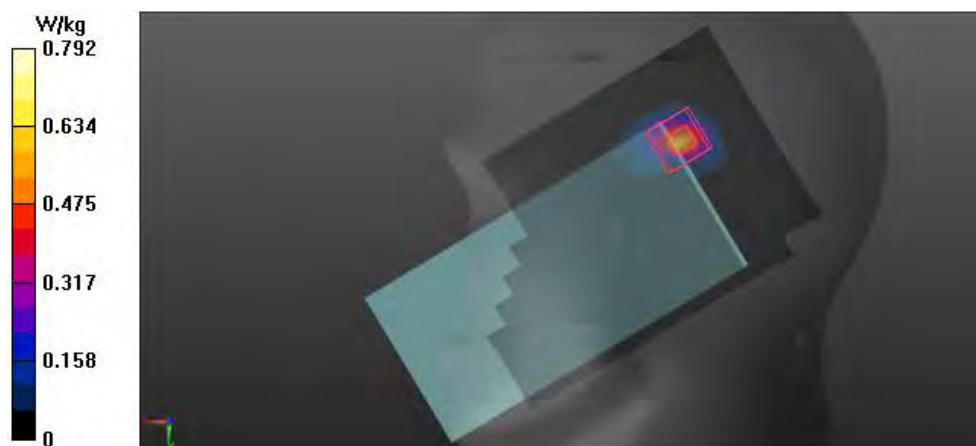

15)

Date: 1/14/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [2. WLAN 5.6 GHz Head.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172167337ECE

Communication System: UID 0, 5G WLAN (0); Frequency: 5610 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5610$ MHz; $\sigma = 4.907$ S/m; $\epsilon_r = 35.464$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.69, 4.69, 4.69) @ 5610 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11_ac_VHT80_CH122_Right Tilt/Area Scan (12x17x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.760 W/kg

Configuration/802.11_ac_VHT80_CH122_Right Tilt/Zoom Scan (9x9x7)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=1.4mm


Reference Value = 6.448 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.105 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.02 W/kg

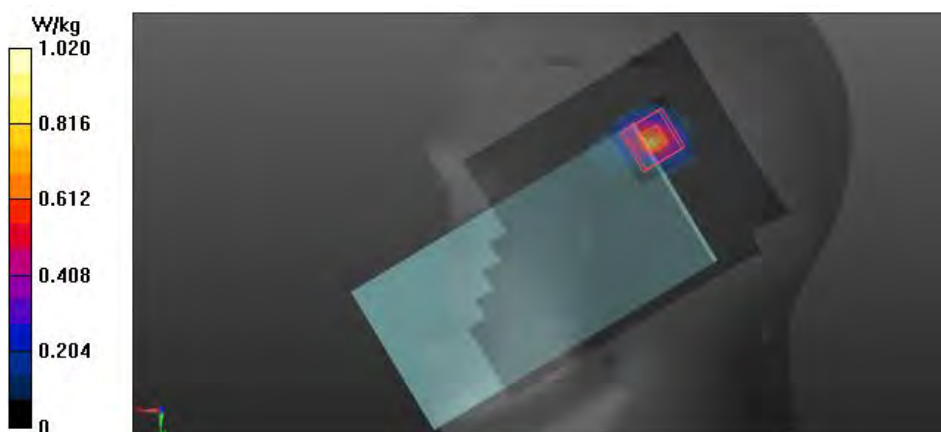

16)

Date: 1/14/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [3. WLAN 5.8 GHz Head.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172167337ECE

Communication System: UID 0, 5GWLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.063$ S/m; $\epsilon_r = 35.186$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928;ConvF(4.65, 4.65, 4.65) @ 5775 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11_ac_VHT80_CH155_Right Tilt/Area Scan (12x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.845 W/kg


Configuration/802.11_ac_VHT80_CH155_Right Tilt/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.764 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

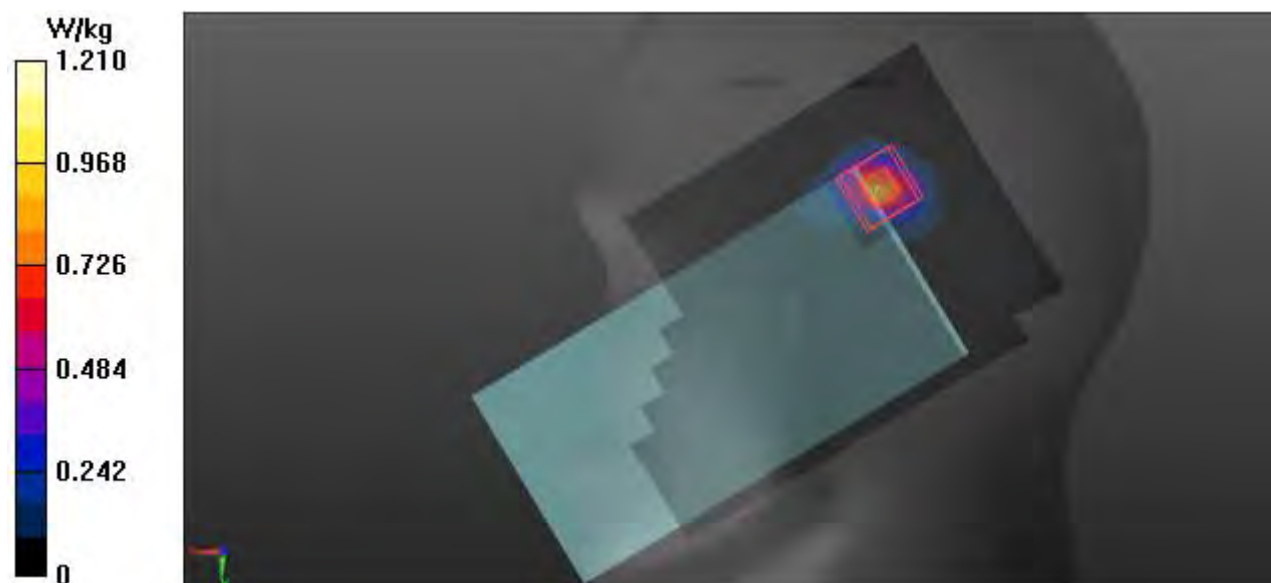

17)

Date: 1/9/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [4. Bluetooth BDR DH5 Head.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172167337ECE

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.30167
 Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.795$ S/m; $\epsilon_r = 38.131$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(7.46, 7.46, 7.46) @ 2441 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Bluetooth_BDR_DH5_CH39_Right Cheek/Area Scan (12x16x1): Measurement grid:
 $dx=12$ mm, $dy=12$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.448 W/kg

Configuration/Bluetooth_BDR_DH5_CH39_Right Cheek/Zoom Scan (7x7x7)/Cube 0: Measurement
 grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 15.09 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.580 W/kg

SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.126 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.430 W/kg

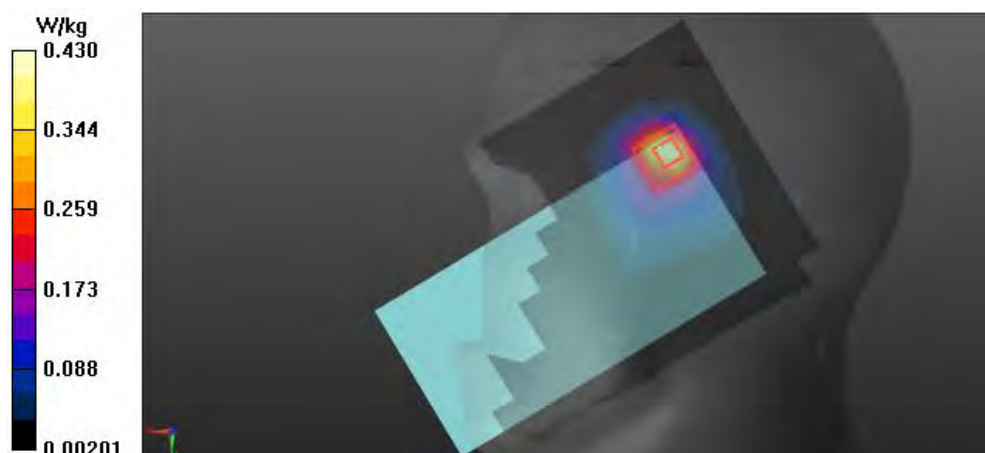

18)

Date: 1/11/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [2. GSM850 Body.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, GSM850_4TX (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.07491

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.603$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.73, 9.73, 9.73) @ 836.6 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/GSM850_GPRS 4Tx_CH190_Rear_15mm/Area Scan (11x17x1): Measurement grid:
 $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.476 W/kg


Configuration/GSM850_GPRS 4Tx_CH190_Rear_15mm/Zoom Scan (5x5x7)/Cube 0: Measurement
grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.88 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.529 W/kg

SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.300 W/kg

Maximum value of SAR (measured) = 0.481 W/kg

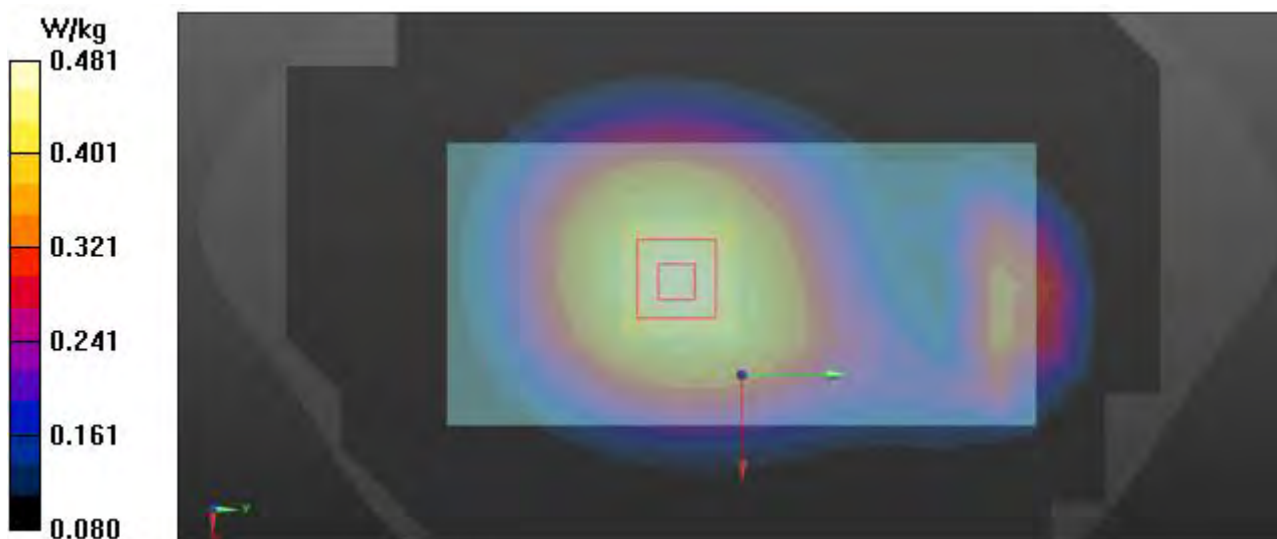

19)

Date: 1/5/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: **2. GSM1900 Body.da53:0**

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, GSM1900_4TX (0); Frequency: 1880 MHz; Duty Cycle: 1:2.07491

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.361 \text{ S/m}$; $\epsilon_r = 40.093$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.55, 8.55, 8.55) @ 1880 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/GSM1900_GPRS 4Tx_CH661_Rear_15mm/Area Scan (11x10x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.291 W/kg


Configuration/GSM1900_GPRS 4Tx_CH661_Rear_15mm/Zoom Scan (5x5x7)/Cube 0: Measurement
grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.86 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.300 W/kg

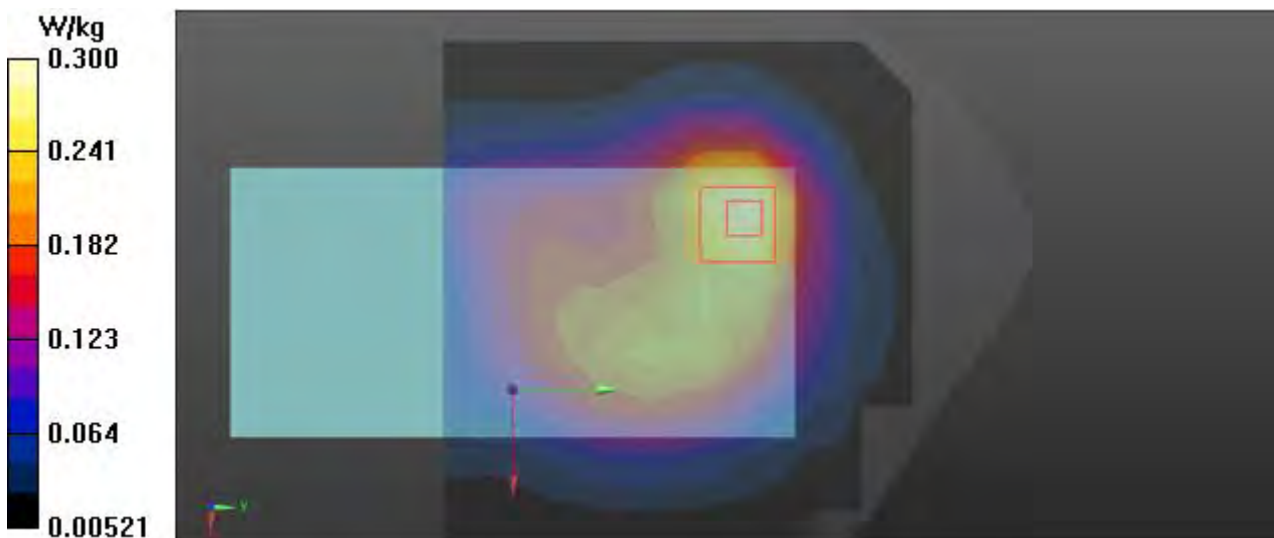

20)

Date: 1/5/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [2. WCDMA II Body.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, W-CDMA 1900 (Band 2) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.361$ S/m; $\epsilon_r = 40.093$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.55, 8.55, 8.55) @ 1880 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/WCDMA II_CH9400_Rear_15mm/Area Scan (11x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.409 W/kg


Configuration/WCDMA II_CH9400_Rear_15mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.49 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.517 W/kg

SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.183 W/kg

Maximum value of SAR (measured) = 0.432 W/kg

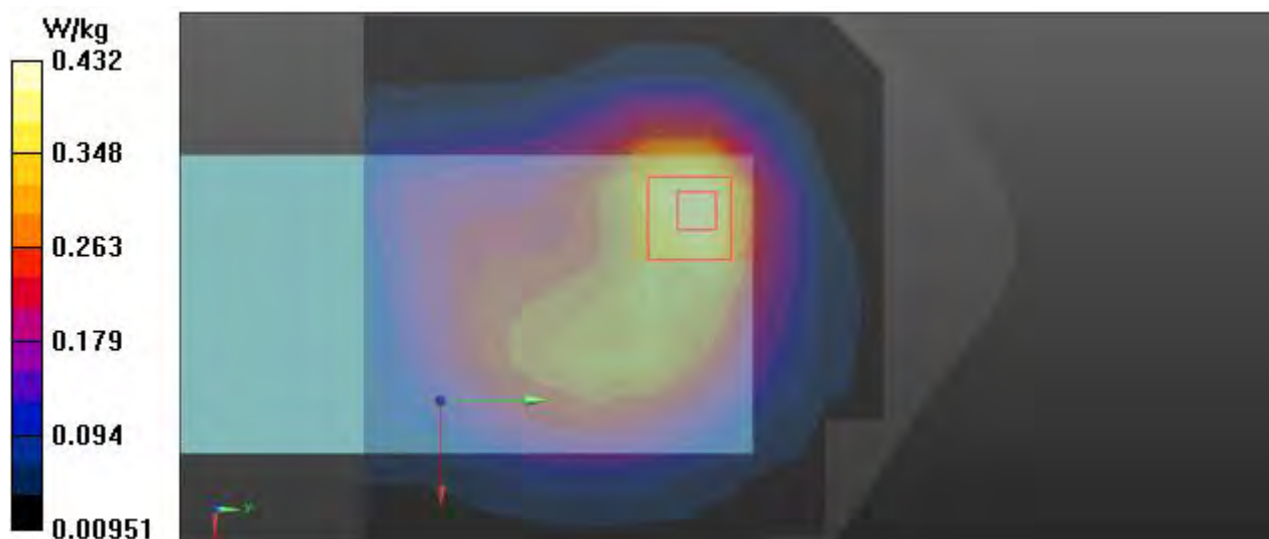

21)

Date: 1/9/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [2. WCDMA IV Body.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K


Communication System: UID 0, W-CDMA 1750 (Band 4) (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.4 \text{ MHz}$; $\sigma = 1.332 \text{ S/m}$; $\epsilon_r = 38.515$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.62, 8.62, 8.62) @ 1732.4 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/WCDMA IV _CH1412_Rear_15mm/Area Scan (11x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.323 W/kg

Configuration/WCDMA IV _CH1412_Rear_15mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid:
 $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 9.452 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.390 W/kg
SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.166 W/kg
Maximum value of SAR (measured) = 0.336 W/kg

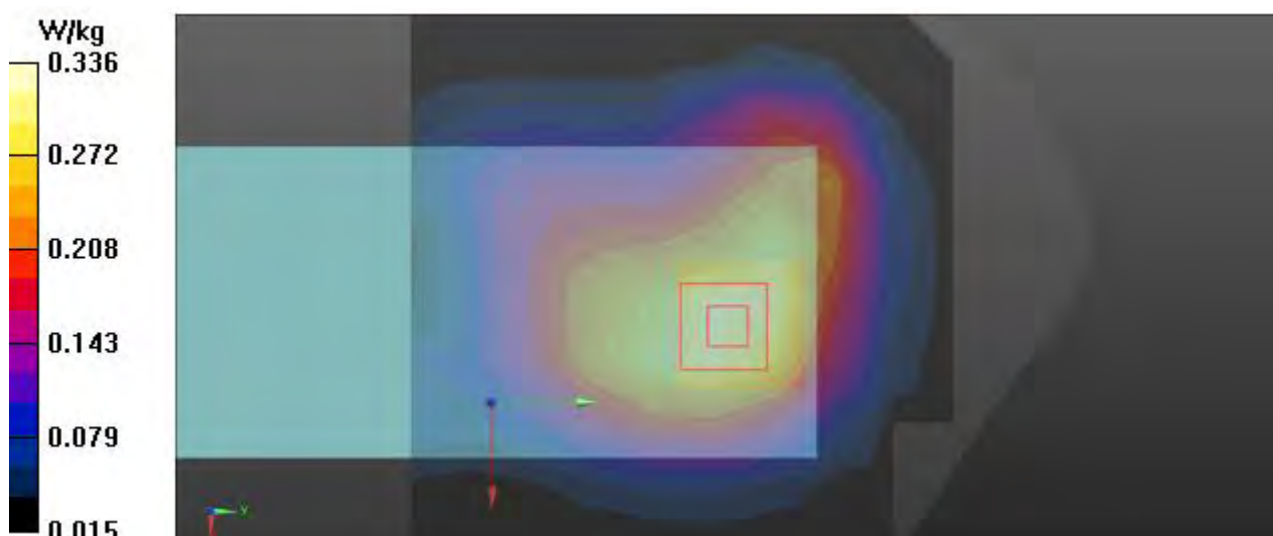

22)

Date: 1/11/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [2. WCDMA V Body.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, W-CDMA 850 (Band 5) (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.603$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.73, 9.73, 9.73) @ 836.6 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/WCDMA V _CH4183_Rear_15mm/Area Scan (11x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.382 W/kg


Configuration/WCDMA V _CH4183_Rear_15mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.07 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.527 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.441 W/kg

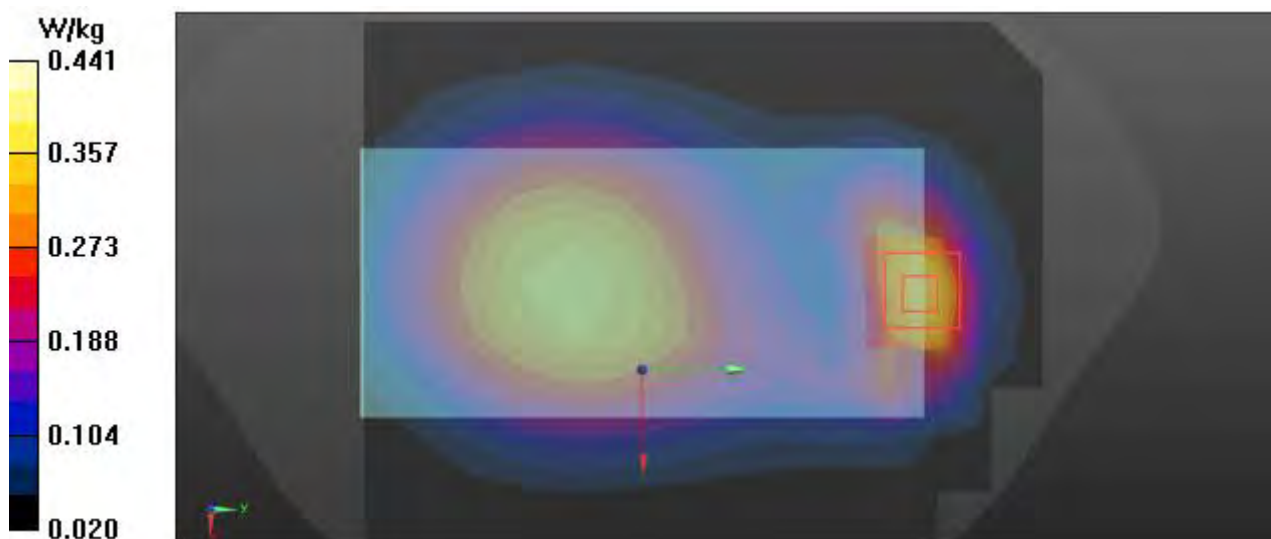

23)

Date: 1/6/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: **2. LTE Band 2 QPSK 20 MHz Body.da53:0**

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, LTE Band 2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 40.128$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.55, 8.55, 8.55) @ 1880 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/LTE Band 2_QPSK_20 MHz_1 RB_49Offset_CH18900_Rear_15mm/Area Scan (11x10x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.428 W/kg

Configuration/LTE Band 2_QPSK_20 MHz_1 RB_49Offset_CH18900_Rear_15mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 13.15 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 0.550 W/kg
SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.191 W/kg
 Maximum value of SAR (measured) = 0.457 W/kg

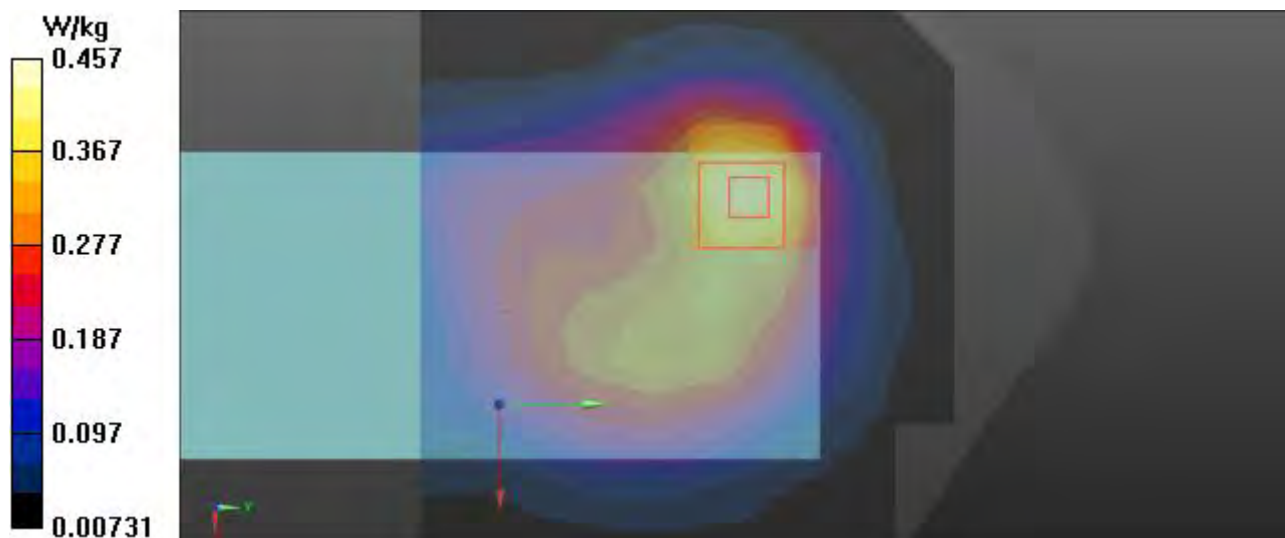

24)

Date: 1/12/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: **2. LTE Band 5 QPSK 10 MHz Body.da53:0**

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.896$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.73, 9.73, 9.73) @ 836.5 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/LTE Band 5_QPSK_10 MHz_1 RB_49Offset_CH20525_Rear_15mm/Area Scan (11x14x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.380 W/kg

Configuration/LTE Band 5_QPSK_10 MHz_1 RB_49Offset_CH20525_Rear_15mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 19.98 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.557 W/kg

SAR(1 g) = 0.319 W/kg; SAR(10 g) = 0.188 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.469 W/kg

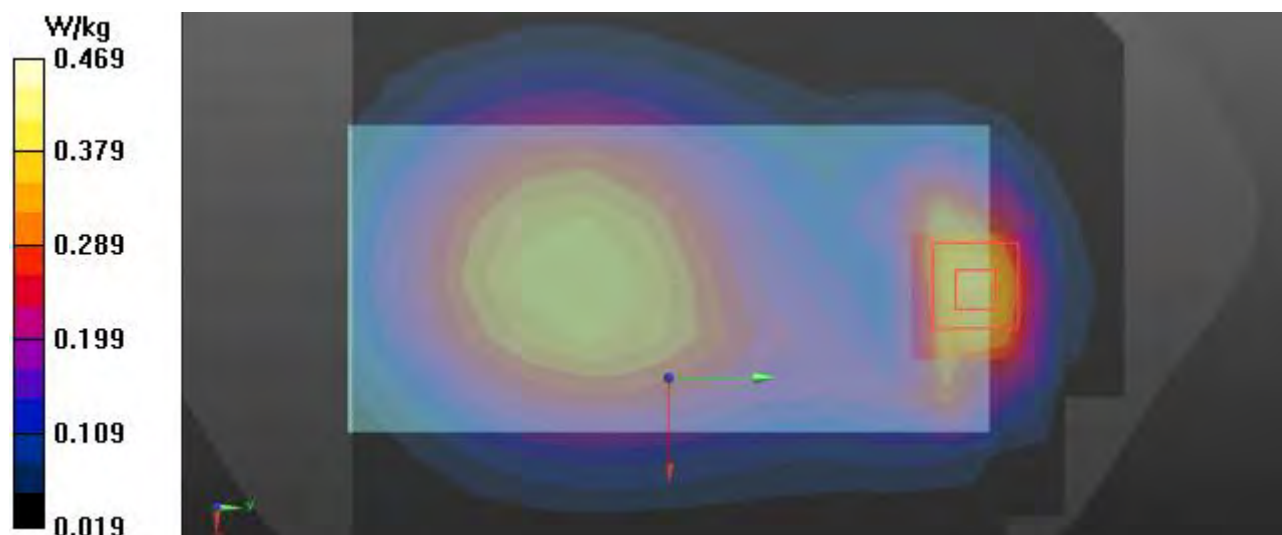

25)

Date: 1/14/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: **2. LTE Band 12 QPSK 10 MHz Body.da53:0**

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 43.248$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(10.25, 10.25, 10.25) @ 707.5 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/LTE Band 12_QPSK_10 MHz_1 RB_49Offset_CH23095_Rear_15mm/Area Scan (11x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.333 W/kg

Configuration/LTE Band 12_QPSK_10 MHz_1 RB_49Offset_CH23095_Rear_15mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.52 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.377 W/kg
SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.210 W/kg
Maximum value of SAR (measured) = 0.342 W/kg

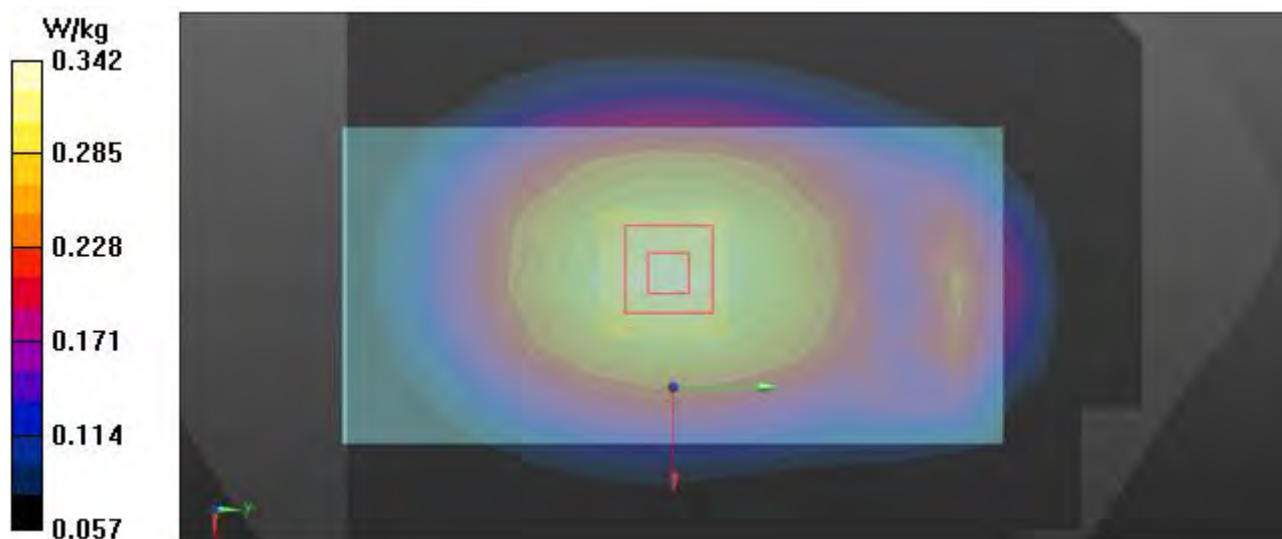

26)

Date: 1/16/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: **2. LTE Band 13 QPSK 10 MHz Body.da53:0**

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E31720C5337ECE

Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.893 \text{ S/m}$; $\epsilon_r = 41.579$; $\rho = 1000 \text{ kg/m}^3$


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(10.25, 10.25, 10.25) @ 782 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/LTE Band 13_QPSK_10 MHz_1 RB_0Offset_CH23230_Rear_15mm/Area Scan (11x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.319 W/kg

Configuration/LTE Band 13_QPSK_10 MHz_1 RB_0Offset_CH23230_Rear_15mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 19.54 V/m; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 0.349 W/kg
SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.200 W/kg
 Maximum value of SAR (measured) = 0.317 W/kg

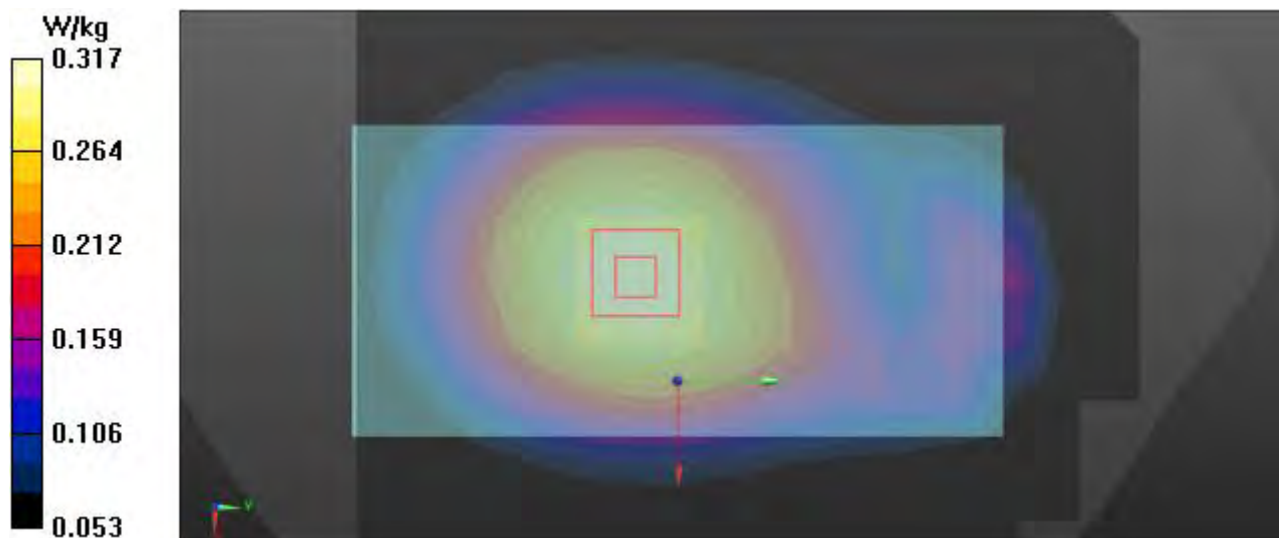

27)

Date: 1/13/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [2. LTE Band 26 QPSK 15 MHz Body.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E31720C5337ECE

Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 42.204$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.73, 9.73, 9.73) @ 831.5 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/LTE Band 26_QPSK_15 MHz_1 RB_36Offset_CH26865_Rear_15mm/Area Scan (11x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.284 W/kg

Configuration/LTE Band 26_QPSK_15 MHz_1 RB_36Offset_CH26865_Rear_15mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 17.57 V/m; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 0.414 W/kg
SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.140 W/kg
 Maximum value of SAR (measured) = 0.342 W/kg

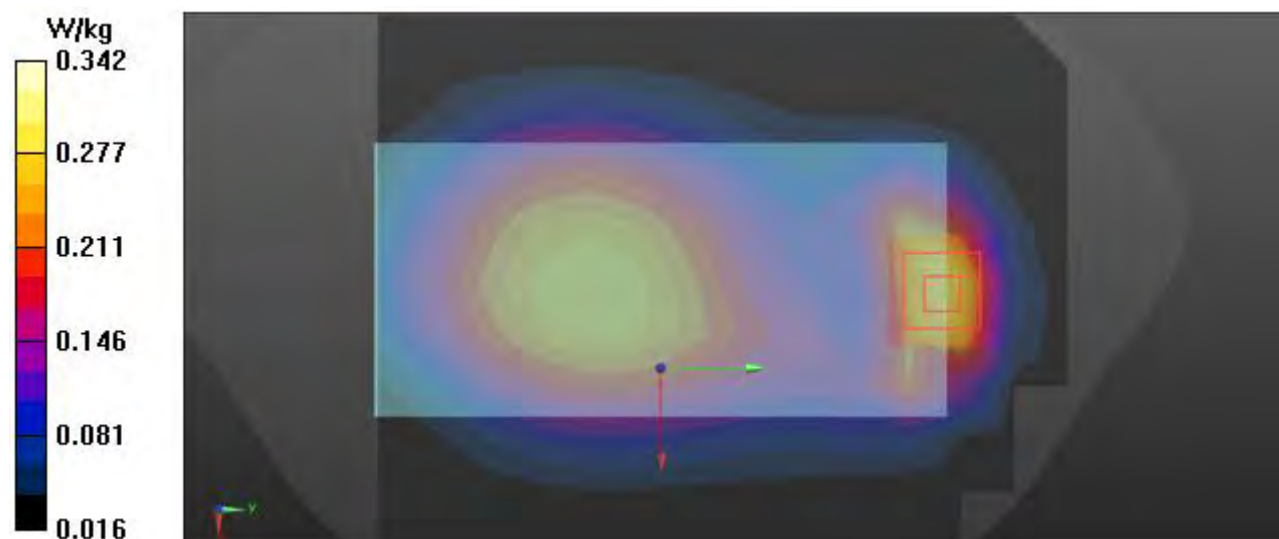

28)

Date: 2023-01-14

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [2. LTE Band 41 QPSK 20 MHz Body.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172086337ECE

Communication System: UID 0, LTE Band 41 (0); Frequency: 2506 MHz; Duty Cycle: 1:1.58016
Medium parameters used (interpolated): $f = 2506$ MHz; $\sigma = 1.881$ S/m; $\epsilon_r = 38.793$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7770;ConvF(6.94, 6.94, 6.94) @ 2506 MHz; Calibrated: 2022-11-18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1567; Calibrated: 2022-03-24
- Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1728
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/LTE Band 41_QPSK_20 MHz_1RB_49Offset_CH39750_Rear_15mm/Area Scan (13x13x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.281 W/kg

Configuration/LTE Band 41_QPSK_20 MHz_1RB_49Offset_CH39750_Rear_15mm/Zoom Scan (8x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 10.87 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.380 W/kg

SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.104 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.297 W/kg

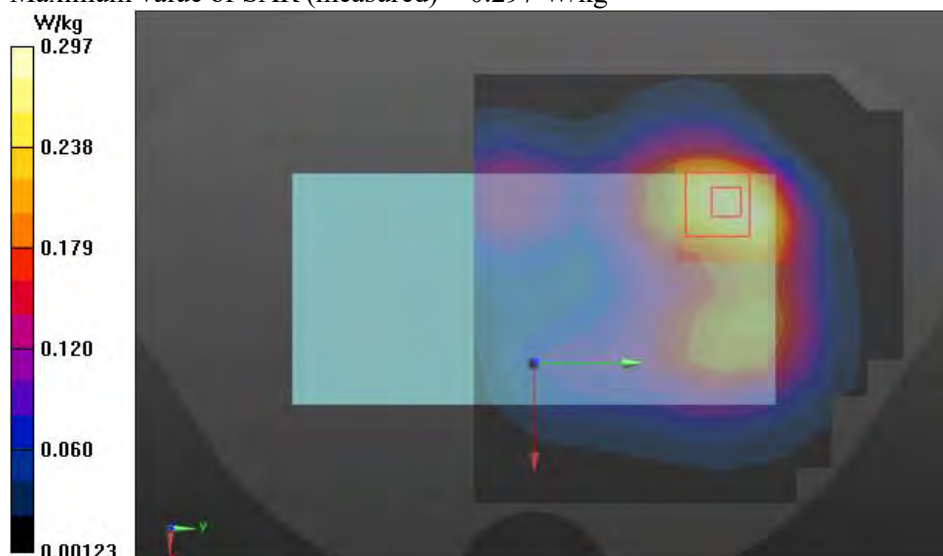

29)

Date: 1/10/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [2. LTE Band 66 QPSK 20 MHz Body.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172086337ECE

Communication System: UID 0, LTE Band 66 (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 38.46$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.62, 8.62, 8.62) @ 1770 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/LTE Band 66_QPSK_20 MHz_1 RB_49Offset_CH132572_Rear_15mm/Area Scan (11x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.347 W/kg

Configuration/LTE Band 66_QPSK_20 MHz_1 RB_49Offset_CH132572_Rear_15mm/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.43 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.421 W/kg
SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.175 W/kg
Maximum value of SAR (measured) = 0.359 W/kg

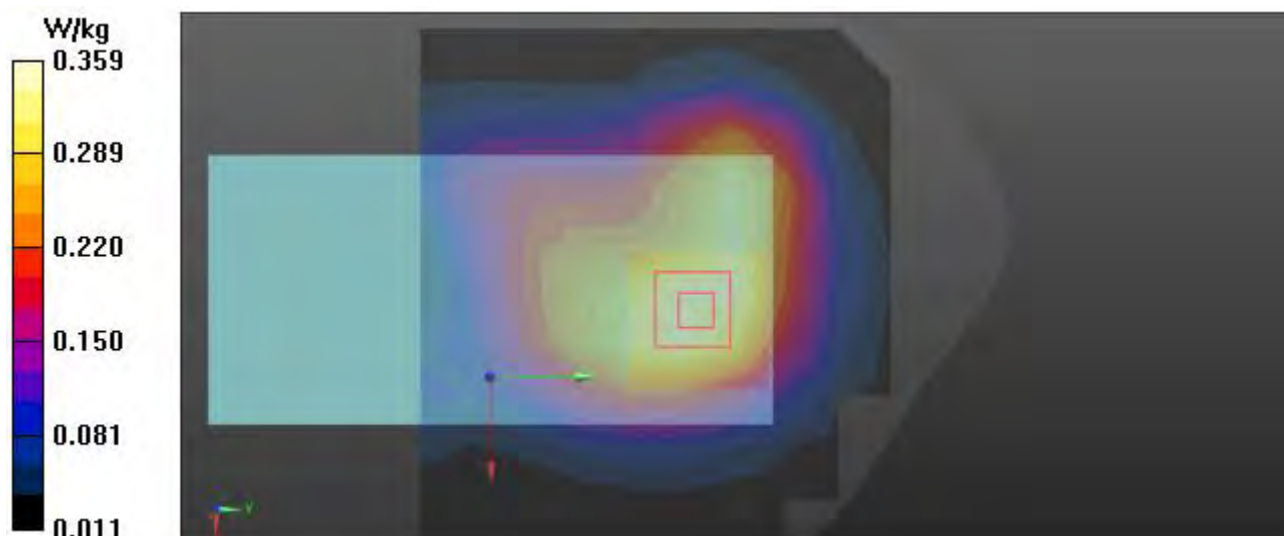

30)

Date: 1/9/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [2. WLAN 2.4 GHz Body.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172167337ECE

Communication System: UID 0, 2.4GWLAN (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.792$ S/m; $\epsilon_r = 38.136$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928;ConvF(7.46, 7.46, 7.46) @ 2437 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11_b_CH6_Rear_15 mm/Area Scan (12x11x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.314 W/kg

Configuration/802.11_b_CH6_Rear_15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 5.118 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.424 W/kg

SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.107 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.339 W/kg

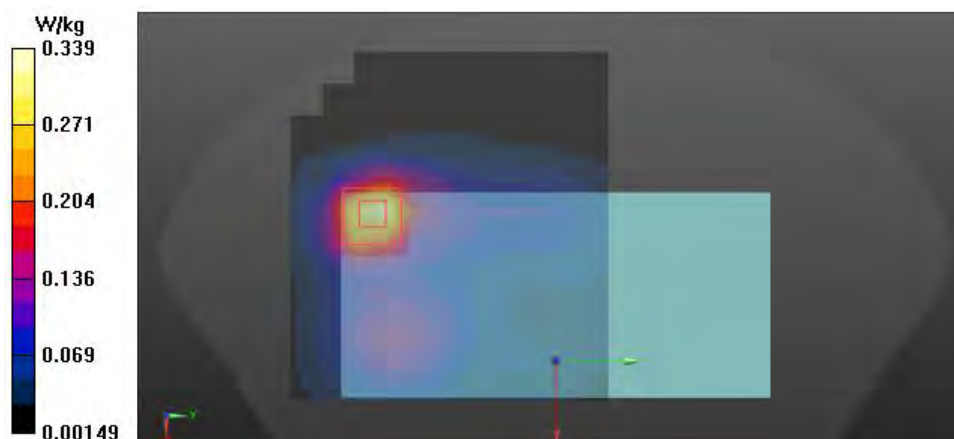

31)

Date: 1/10/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [2. WLAN 5.3 GHz Body.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172167337ECE

Communication System: UID 0, 5GWLAN (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.713$ S/m; $\epsilon_r = 34.945$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928;ConvF(5.16, 5.16, 5.16) @ 5280 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11_a_CH56_Rear_15 mm/Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.430 W/kg


Configuration/802.11_a_CH56_Rear_15 mm/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.97 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.746 W/kg

SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.462 W/kg

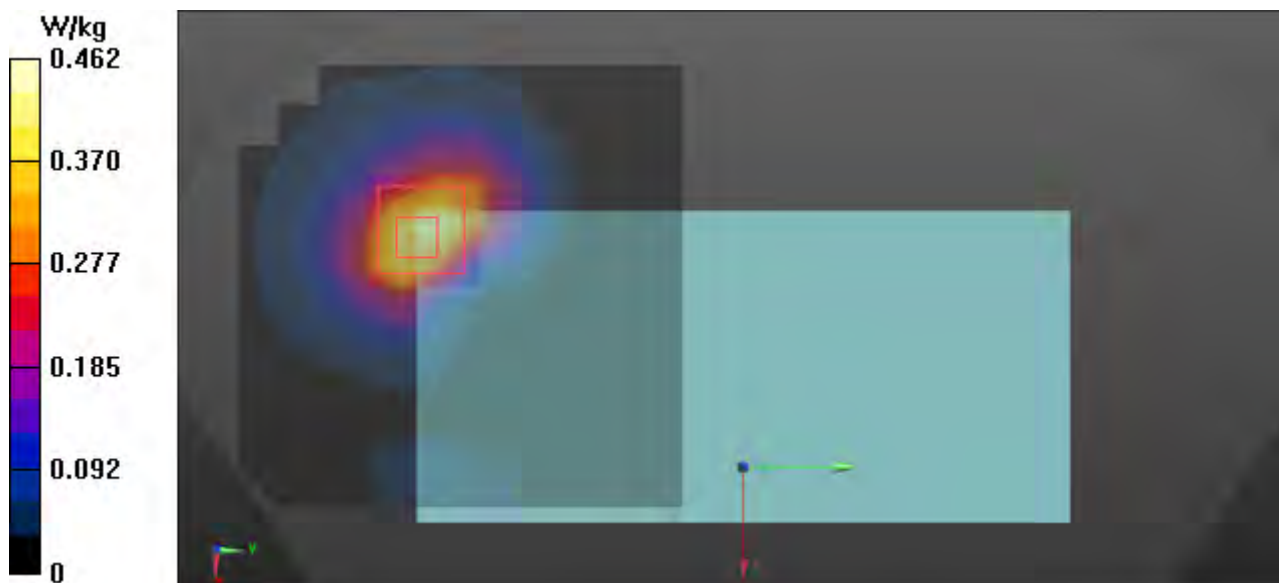

32)

Date: 1/11/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [2. WLAN 5.6 GHz Body.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172167337ECE

Communication System: UID 0, 5GWLAN (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.987$ S/m; $\epsilon_r = 34.364$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928;ConvF(4.69, 4.69, 4.69) @ 5600 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11_a_CH120_Rear_15 mm/Area Scan (12x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.648 W/kg


Configuration/802.11_a_CH120_Rear_15 mm/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 13.35 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 0.716 W/kg

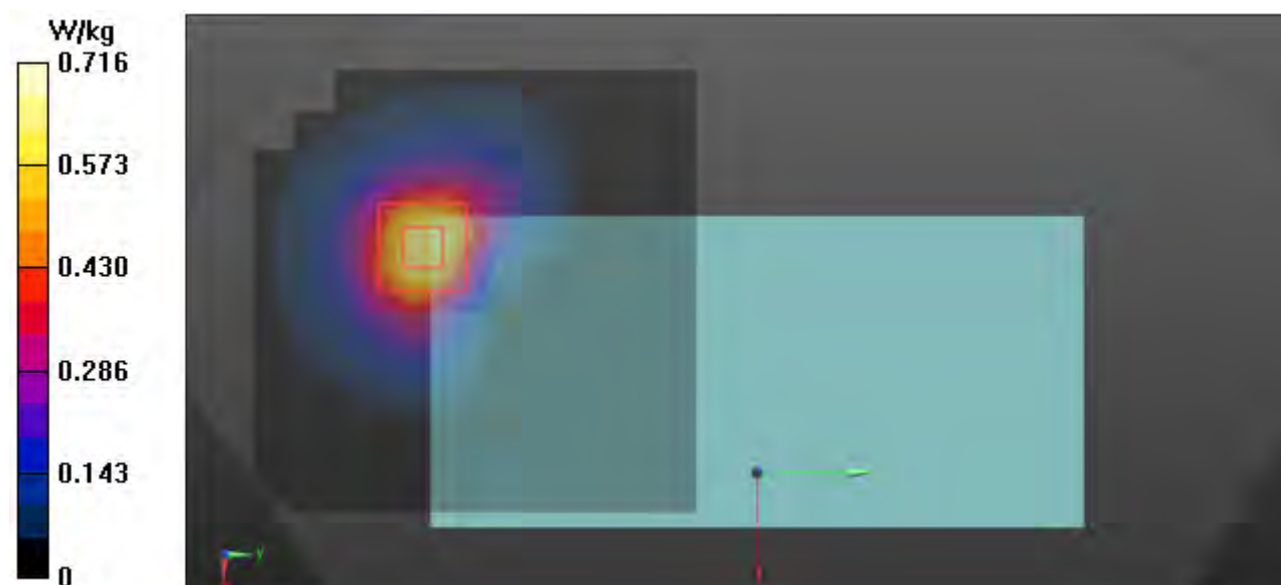

33)

Date: 1/12/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [2. WLAN 5.8 GHz Body.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172167337ECE

Communication System: UID 0, 5G WLAN (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.16$ S/m; $\epsilon_r = 33.886$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(4.65, 4.65, 4.65) @ 5785 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11_a_CH157_Rear_15 mm/Area Scan (12x13x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.734 W/kg

Configuration/802.11_a_CH157_Rear_15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm


Reference Value = 13.73 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.132 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.789 W/kg

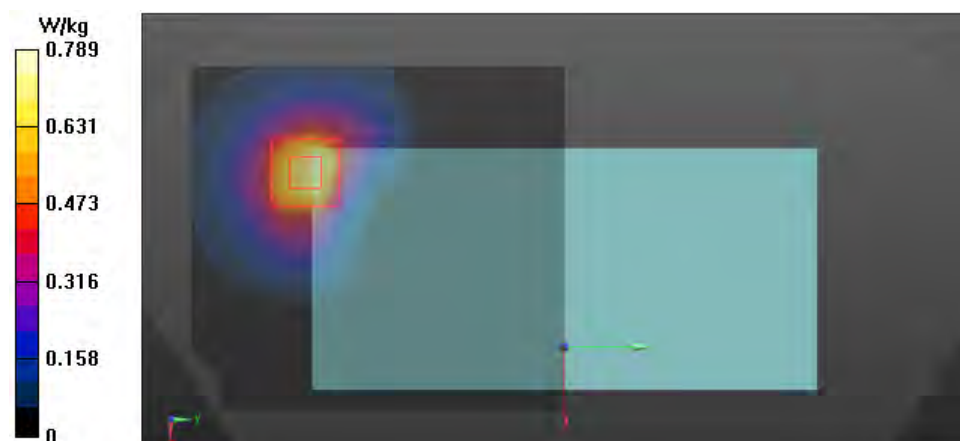

34)

Date: 1/9/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [5. Bluetooth BDR DH5 Body.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172167337ECE

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.30167
 Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.795$ S/m; $\epsilon_r = 38.131$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928;ConvF(7.46, 7.46, 7.46) @ 2441 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Bluetooth_BDR_DH5_CH39_Rear_15 mm/Area Scan (10x11x1): Measurement grid:
 $dx=12$ mm, $dy=12$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.121 W/kg

Configuration/Bluetooth_BDR_DH5_CH39_Rear_15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement
 grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 8.910 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.041 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.135 W/kg

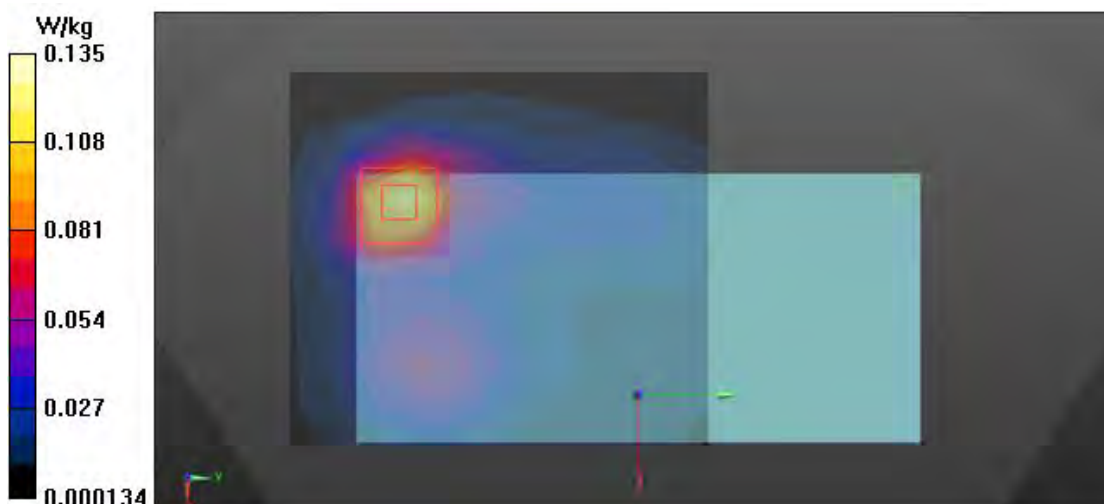

35)

Date: 1/11/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: **3. GSM850 Hotspot.da53:0**

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, GSM850_4TX (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.07491

Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.914 \text{ S/m}$; $\epsilon_r = 42.541$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.73, 9.73, 9.73) @ 848.8 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/GSM850_GPRS 4Tx_CH251_Rear_10mm/Area Scan (11x14x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.07 W/kg


Configuration/GSM850_GPRS 4Tx_CH251_Rear_10mm/Zoom Scan (5x5x7)/Cube 0: Measurement
grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.66 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.829 W/kg; SAR(10 g) = 0.458 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

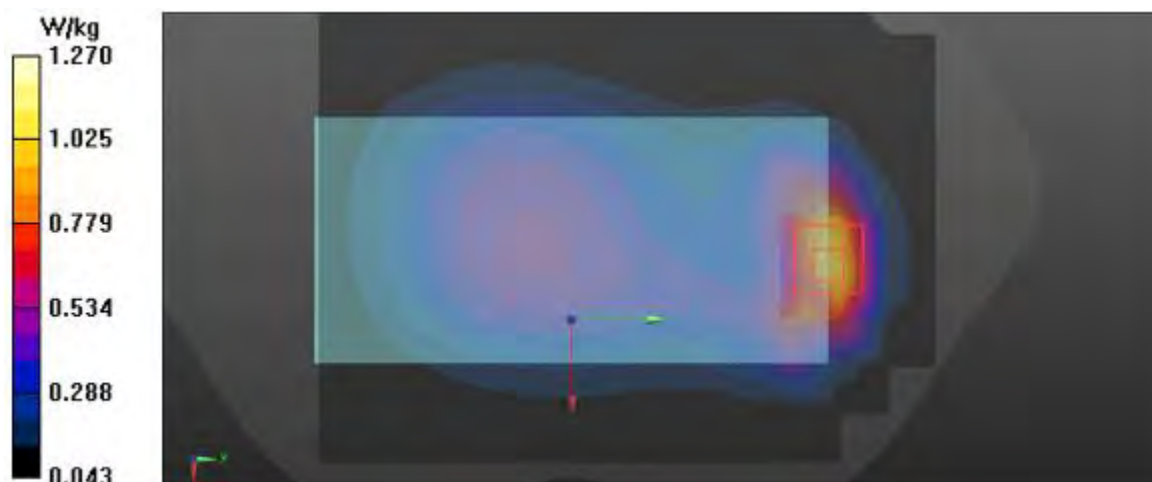

36)

Date: 1/5/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: **3. GSM1900 Hotspot.da53:2**

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, GSM1900_4TX (0); Frequency: 1880 MHz; Duty Cycle: 1:2.07491

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.361$ S/m; $\epsilon_r = 40.093$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.55, 8.55, 8.55) @ 1880 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 3/GSM1900_GPRS 4Tx_CH661_Bottom_10mm/Area Scan (7x11x1): Measurement grid:
 $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.466 W/kg

Configuration 3/GSM1900_GPRS 4Tx_CH661_Bottom_10mm/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.21 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.559 W/kg

SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.190 W/kg

Maximum value of SAR (measured) = 0.469 W/kg

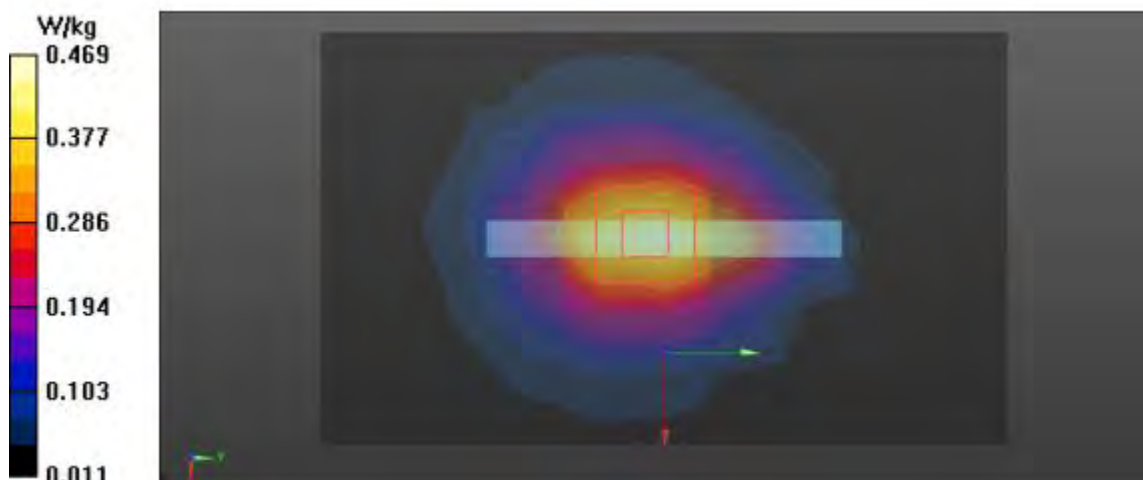

37)

Date: 1/5/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [3. WCDMA II Hotspot.da53:2](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, W-CDMA 1900 (Band 2) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.361$ S/m; $\epsilon_r = 40.093$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.55, 8.55, 8.55) @ 1880 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 3/WCDMA II _CH9400_Bottom_10mm/Area Scan (7x11x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.485 W/kg

Configuration 3/WCDMA II _CH9400_Bottom_10mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


$dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.52 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.585 W/kg

SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 0.490 W/kg

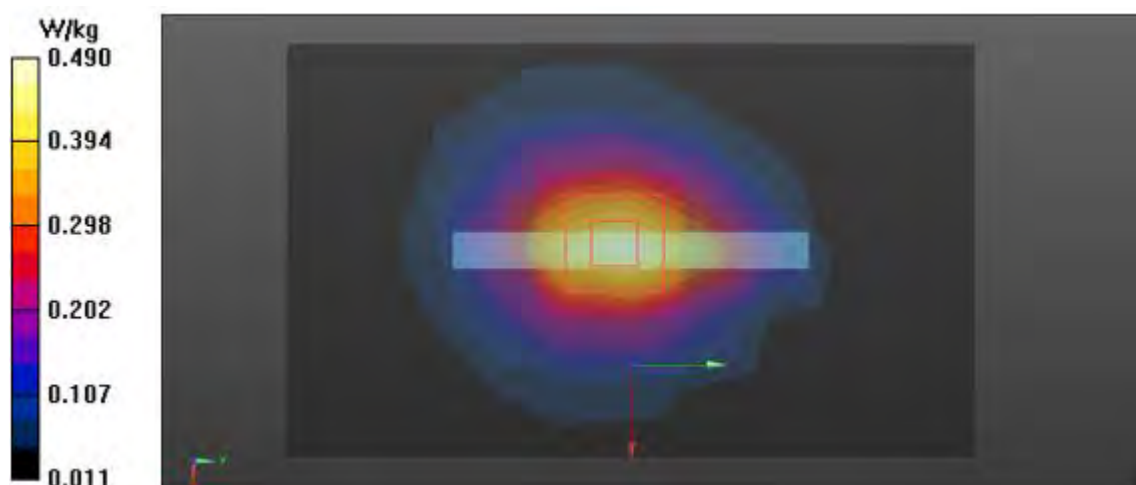

38)

Date: 1/9/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [3. WCDMA IV Hotspot.da53:2](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K


Communication System: UID 0, W-CDMA 1750 (Band 4) (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.4 \text{ MHz}$; $\sigma = 1.332 \text{ S/m}$; $\epsilon_r = 38.515$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.62, 8.62, 8.62) @ 1732.4 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 3/WCDMA IV _CH1412_Bottom_10mm/Area Scan (7x11x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.385 W/kg

Configuration 3/WCDMA IV _CH1412_Bottom_10mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid:
 $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 17.58 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 0.478 W/kg
SAR(1 g) = 0.284 W/kg; SAR(10 g) = 0.171 W/kg
 Maximum value of SAR (measured) = 0.406 W/kg

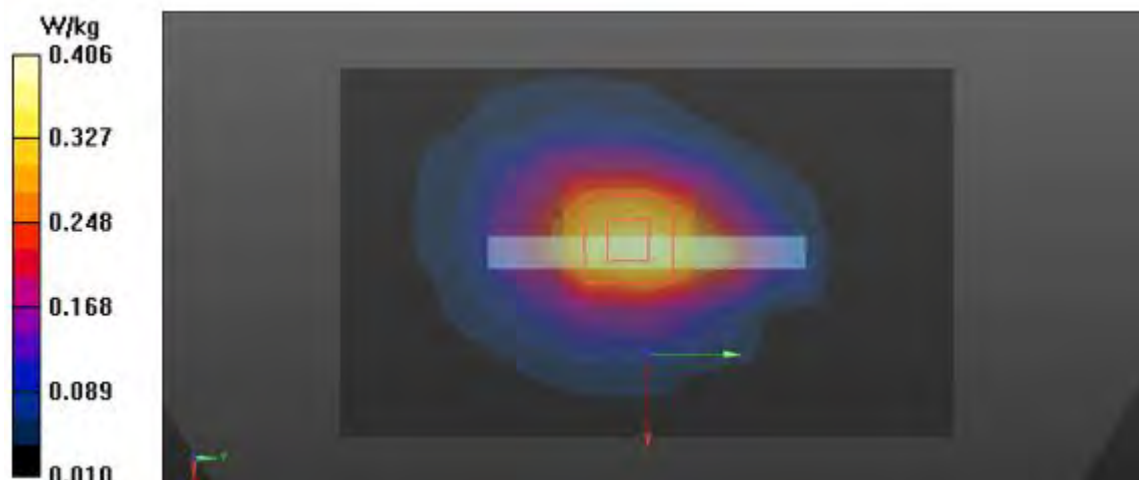

39)

Date: 1/11/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [3. WCDMA V Hotspot.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172086337ECE


Communication System: UID 0, W-CDMA 850 (Band 5) (0); Frequency: 846.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 42.548$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.73, 9.73, 9.73) @ 846.6 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/WCDMA V _CH4233_Rear_10mm/Area Scan (11x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.888 W/kg

Configuration/WCDMA V _CH4233_Rear_10mm/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 21.15 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 1.44 W/kg
SAR(1 g) = 0.749 W/kg; SAR(10 g) = 0.414 W/kg
 Maximum value of SAR (measured) = 1.15 W/kg

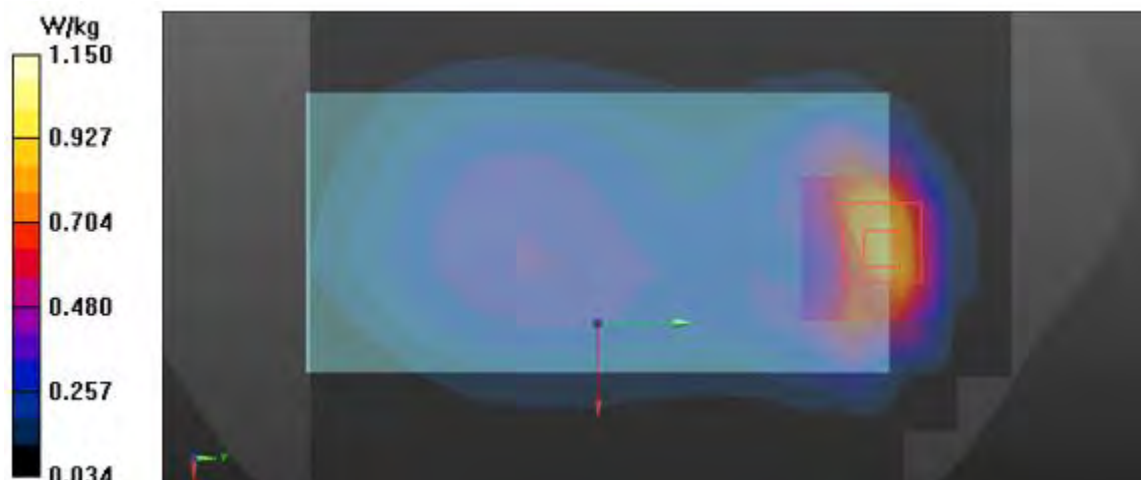

40)

Date: 1/6/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [3. LTE Band 2 QPSK 20 MHz Hotspot.da53:2](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, LTE Band 2 (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 40.095$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.55, 8.55, 8.55) @ 1900 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 3/LTE Band 2_QPSK_20 MHz_1 RB_49Offset_CH19100_Bottom_10mm/Area Scan

(7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.531 W/kg

Configuration 3/LTE Band 2_QPSK_20 MHz_1 RB_49Offset_CH19100_Bottom_10mm/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.21 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.648 W/kg

SAR(1 g) = 0.369 W/kg; SAR(10 g) = 0.215 W/kg

Maximum value of SAR (measured) = 0.540 W/kg

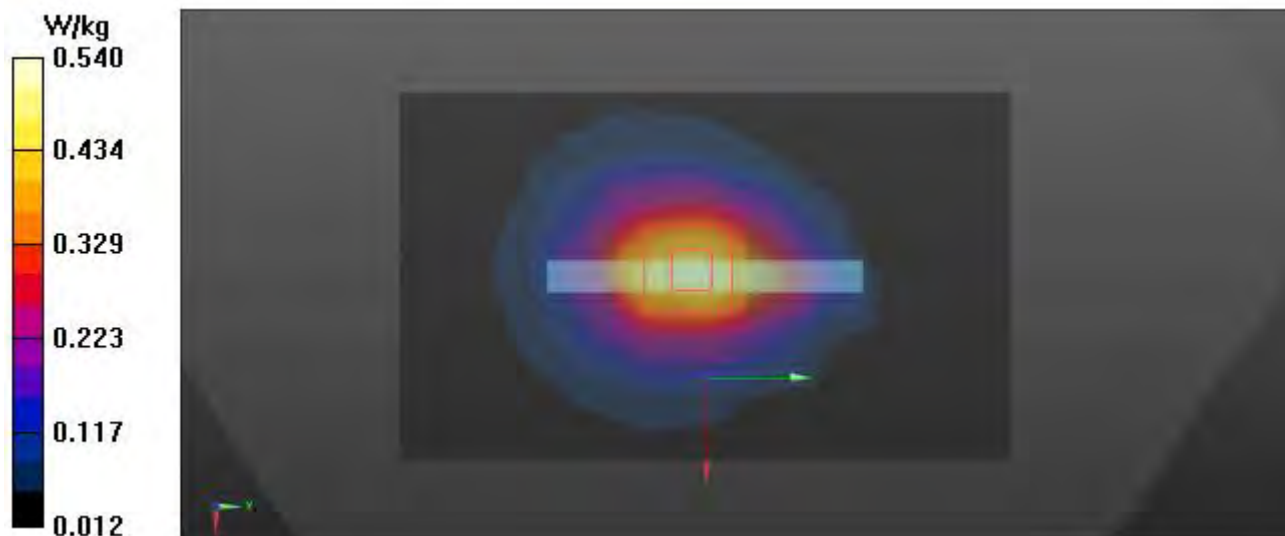

41)

Date: 1/12/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [3. LTE Band 5 QPSK 10 MHz Hotspot.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.896$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.73, 9.73, 9.73) @ 836.5 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/LTE Band 5_QPSK_10 MHz_1 RB_49Offset_CH20525_Rear_10mm/Area Scan (11x14x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.735 W/kg

Configuration/LTE Band 5_QPSK_10 MHz_1 RB_49Offset_CH20525_Rear_10mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 21.83 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.658 W/kg; SAR(10 g) = 0.368 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.01 W/kg

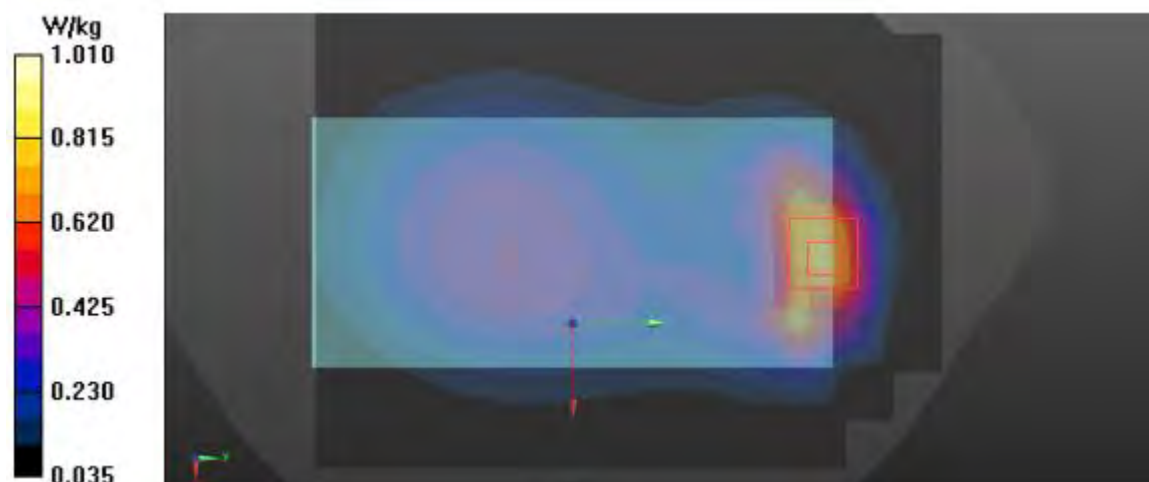

42)

Date: 1/14/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [3. LTE Band 12 QPSK 10 MHz Hotspot.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: R38TB005M6K

Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 43.248$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(10.25, 10.25, 10.25) @ 707.5 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/LTE Band 12_QPSK_10 MHz_1 RB_49Offset_CH23095_Rear_10mm/Area Scan (11x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.377 W/kg

Configuration/LTE Band 12_QPSK_10 MHz_1 RB_49Offset_CH23095_Rear_10mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 21.73 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.655 W/kg
SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.190 W/kg
Maximum value of SAR (measured) = 0.522 W/kg

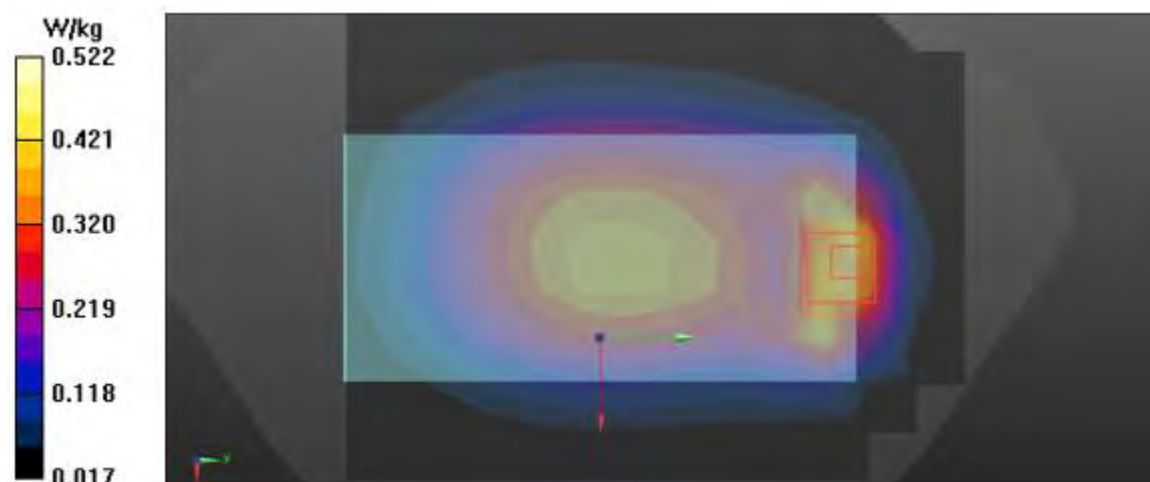

43)

Date: 1/16/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: **3. LTE Band 13 QPSK 10 MHz Hotspot.da53:0**

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E31720C5337ECE

Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.893 \text{ S/m}$; $\epsilon_r = 41.579$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(10.25, 10.25, 10.25) @ 782 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/LTE Band 13_QPSK_10 MHz_1 RB_0Offset_CH23230_Rear_10mm/Area Scan

(11x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.424 W/kg

Configuration/LTE Band 13_QPSK_10 MHz_1 RB_0Offset_CH23230_Rear_10mm/Zoom Scan


(7x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.71 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.649 W/kg

SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.512 W/kg

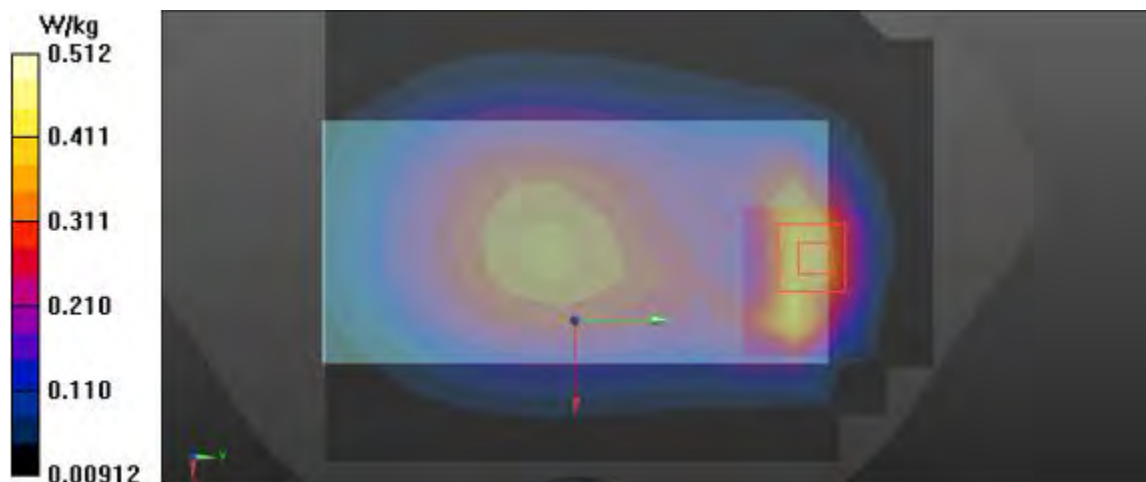

44)

Date: 1/13/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [3. LTE Band 26 QPSK 15 MHz Hotspot.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E31720C5337ECE

Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 42.204$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.73, 9.73, 9.73) @ 831.5 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/LTE Band 26_QPSK_15 MHz_1 RB_36Offset_CH26865_Rear_10mm/Area Scan

(11x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.595 W/kg

Configuration/LTE Band 26_QPSK_15 MHz_1 RB_36Offset_CH26865_Rear_10mm/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.10 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.525 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 0.792 W/kg

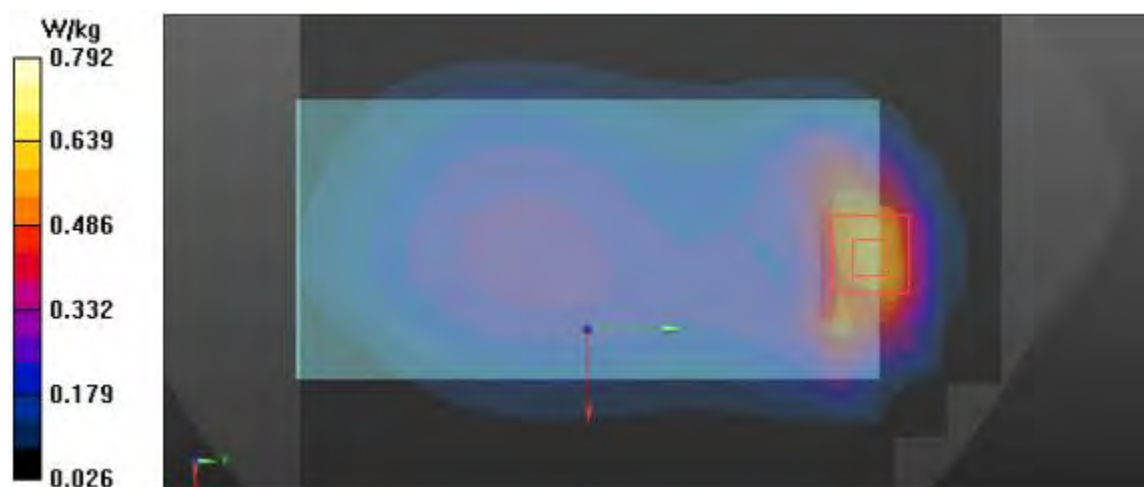

45)

Date: 2023-01-14

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [3. LTE Band 41_QPSK_20 MHz_Hotspot.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172086337ECE

Communication System: UID 0, LTE Band 41 (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58016
Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.953$ S/m; $\epsilon_r = 38.686$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7770;ConvF(6.94, 6.94, 6.94) @ 2593 MHz; Calibrated: 2022-11-18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1567; Calibrated: 2022-03-24
- Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1728
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/LTE Band 41_QPSK_20 MHz_50RB_24Offset_CH40620_Rear_10mm/Area Scan (13x13x1): Measurement grid: dx=12mm, dy=12mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.550 W/kg

Configuration/LTE Band 41_QPSK_20 MHz_50RB_24Offset_CH40620_Rear_10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 15.02 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.723 W/kg

SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.164 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.546 W/kg

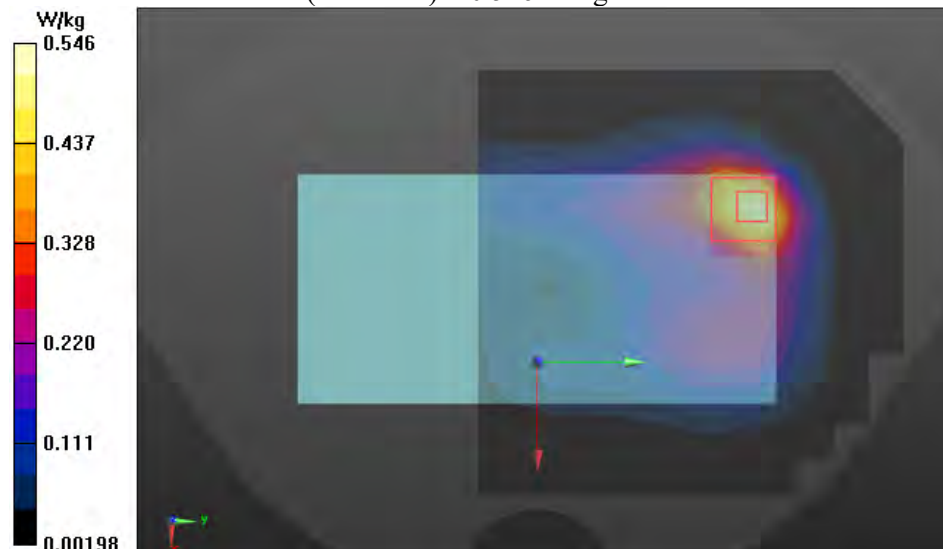

46)

Date: 1/10/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [3. LTE Band 66_QPSK_20 MHz_Hotspot.da53:2](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172086337ECE

Communication System: UID 0, LTE Band 66 (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 38.46$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.62, 8.62, 8.62) @ 1770 MHz; Calibrated: 4/29/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 4/29/2022
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 3/LTE Band 66_QPSK_20 MHz_1 RB_49Offset_CH132572_Bottom_10mm/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.457 W/kg

Configuration 3/LTE Band 66_QPSK_20 MHz_1 RB_49Offset_CH132572_Bottom_10mm/Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 19.00 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 0.544 W/kg
SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.192 W/kg
 Maximum value of SAR (measured) = 0.462 W/kg

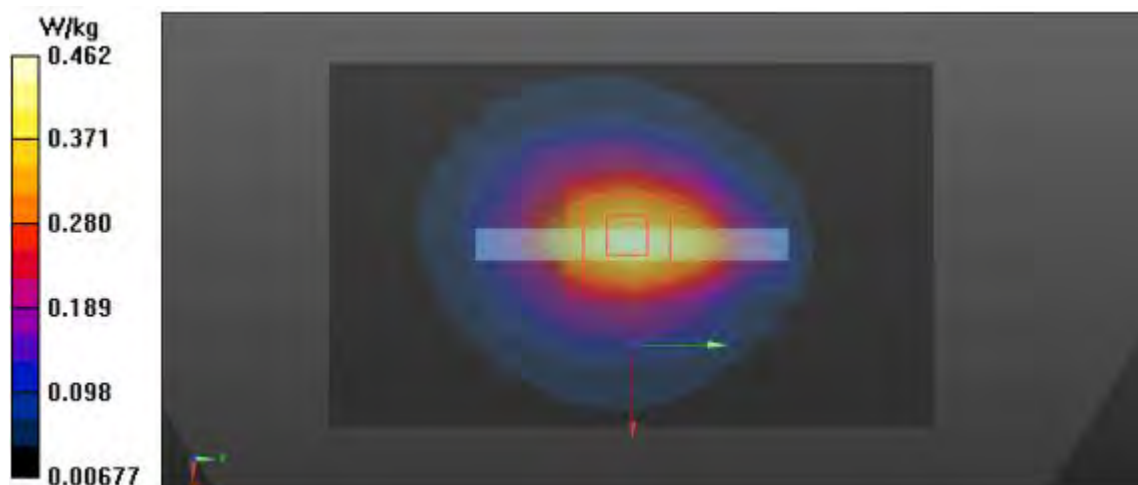

47)

Date: 1/9/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [3. WLAN 2.4 GHz Hotspot.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172167337ECE

Communication System: UID 0, 2.4GWLAN (0); Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.792$ S/m; $\epsilon_r = 38.136$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928;ConvF(7.46, 7.46, 7.46) @ 2437 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11_b_CH6_Rear_10 mm/Area Scan (12x11x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.803 W/kg

Configuration/802.11_b_CH6_Rear_10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 22.88 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.518 W/kg; SAR(10 g) = 0.243 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.869 W/kg

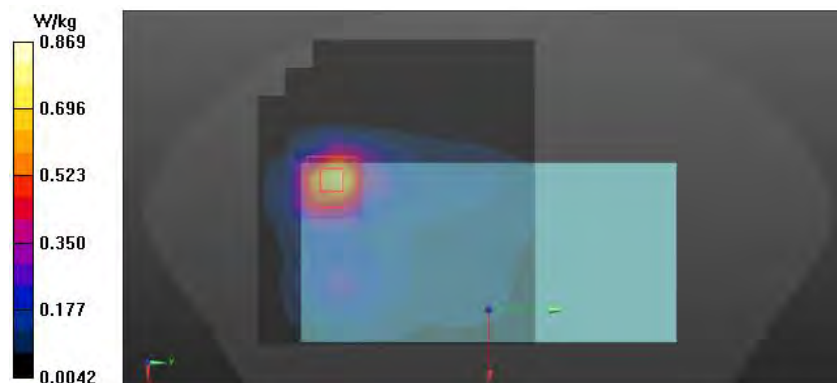

48)

Date: 1/12/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [3. WLAN 5.8 GHz Hotspot.da53:2](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172167337ECE

Communication System: UID 0, 5GWLAN (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.16$ S/m; $\epsilon_r = 33.886$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928;ConvF(4.65, 4.65, 4.65) @ 5785 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration 3/802.11_a_CH157_Top_10 mm/Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.34 W/kg

Configuration 3/802.11_a_CH157_Top_10 mm/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm


Reference Value = 8.680 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.77 W/kg

SAR(1 g) = 0.641 W/kg; SAR(10 g) = 0.235 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.55 W/kg

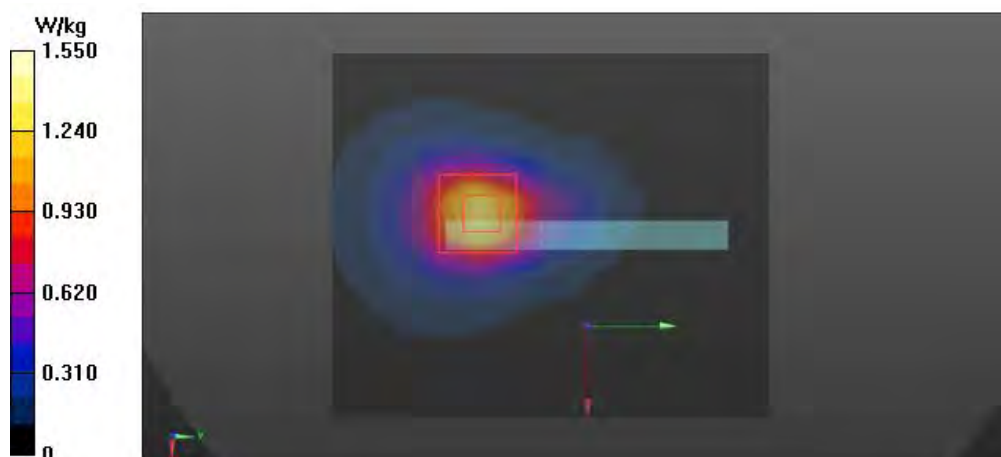

49)

Date: 1/9/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [6. Bluetooth BDR DH5 Hotspot.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172167337ECE

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.30167
 Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.795$ S/m; $\epsilon_r = 38.131$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928;ConvF(7.46, 7.46, 7.46) @ 2441 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Bluetooth_BDR_DH5_CH39_Rear_10 mm/Area Scan (10x11x1): Measurement grid:
 $dx=12$ mm, $dy=12$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.306 W/kg

Configuration/Bluetooth_BDR_DH5_CH39_Rear_10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement
 grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 14.33 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.434 W/kg

SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.093 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.340 W/kg

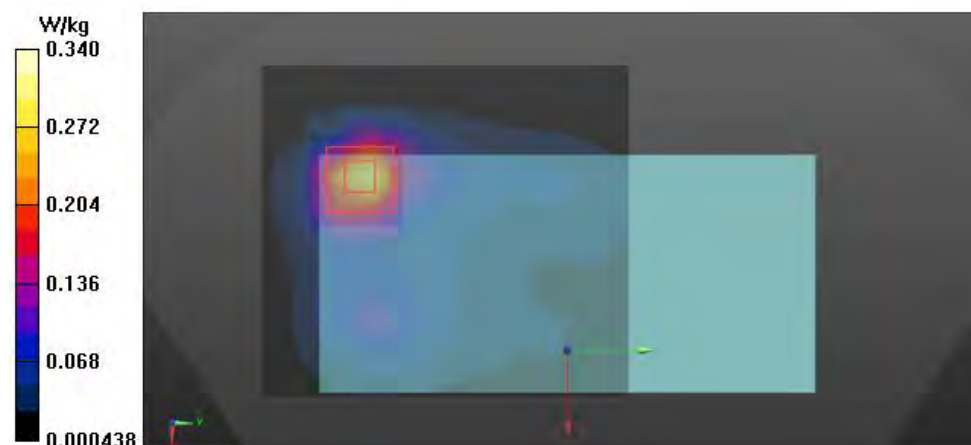

50)

Date: 1/10/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [3. WLAN 5.3 GHz Phablet.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172167337ECE

Communication System: UID 0, 5GWLAN (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280 \text{ MHz}$; $\sigma = 4.713 \text{ S/m}$; $\epsilon_r = 34.945$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928; ConvF(5.16, 5.16, 5.16) @ 5280 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0_Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11_a_CH56_Rear_0 mm/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 10.1 W/kg


Configuration/802.11_a_CH56_Rear_0 mm/Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 39.26 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 20.5 W/kg

SAR(1 g) = 3.8 W/kg; SAR(10 g) = 0.938 W/kg

Maximum value of SAR (measured) = 10.6 W/kg

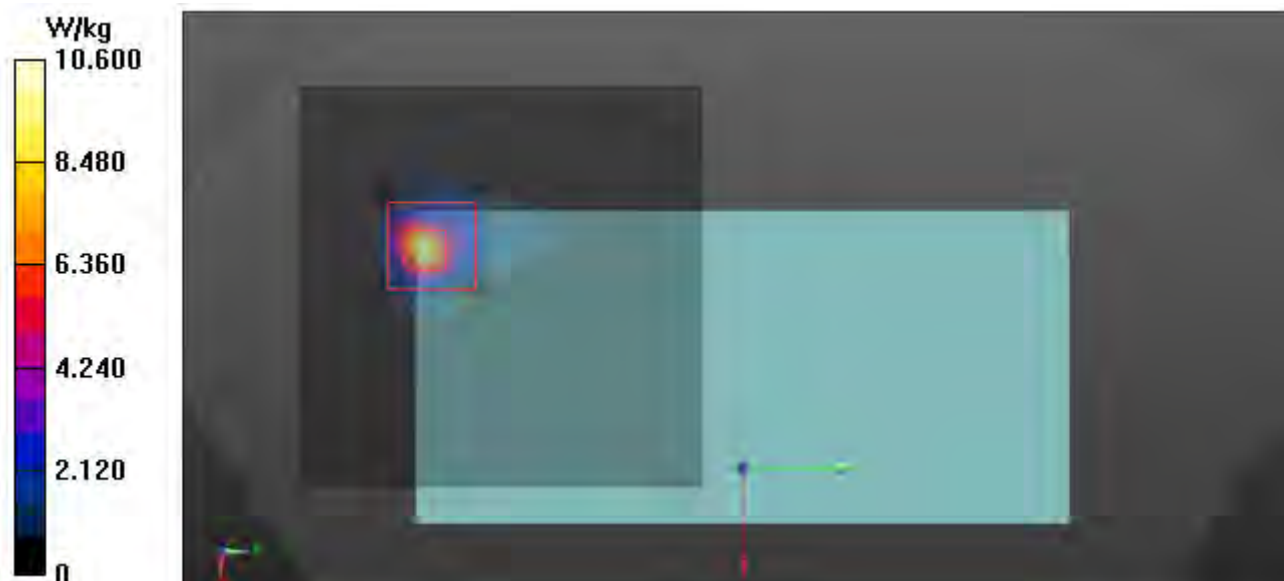

51)

Date: 1/11/2023

Test Laboratory: Eurofins KCTL Co.,Ltd.

File Name: [3. WLAN 5.6 GHz Phablet.da53:0](#)

DUT: SM-A245M_DSN, Type: Mobile Phone, Serial: 67E3172167337ECE

Communication System: UID 0, 5GWLAN (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.987$ S/m; $\epsilon_r = 34.364$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3928;ConvF(4.69, 4.69, 4.69) @ 5600 MHz; Calibrated: 3/3/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 5/31/2022
- Phantom: Twin-SAM V8.0 Right; Type: QD 000 P41 Ax; Serial: 1984
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11_a_CH120_Rear_0 mm/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 11.7 W/kg


Configuration/802.11_a_CH120_Rear_0 mm/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 43.22 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 24.0 W/kg

SAR(1 g) = 4.07 W/kg; SAR(10 g) = 1.01 W/kg

Maximum value of SAR (measured) = 11.8 W/kg

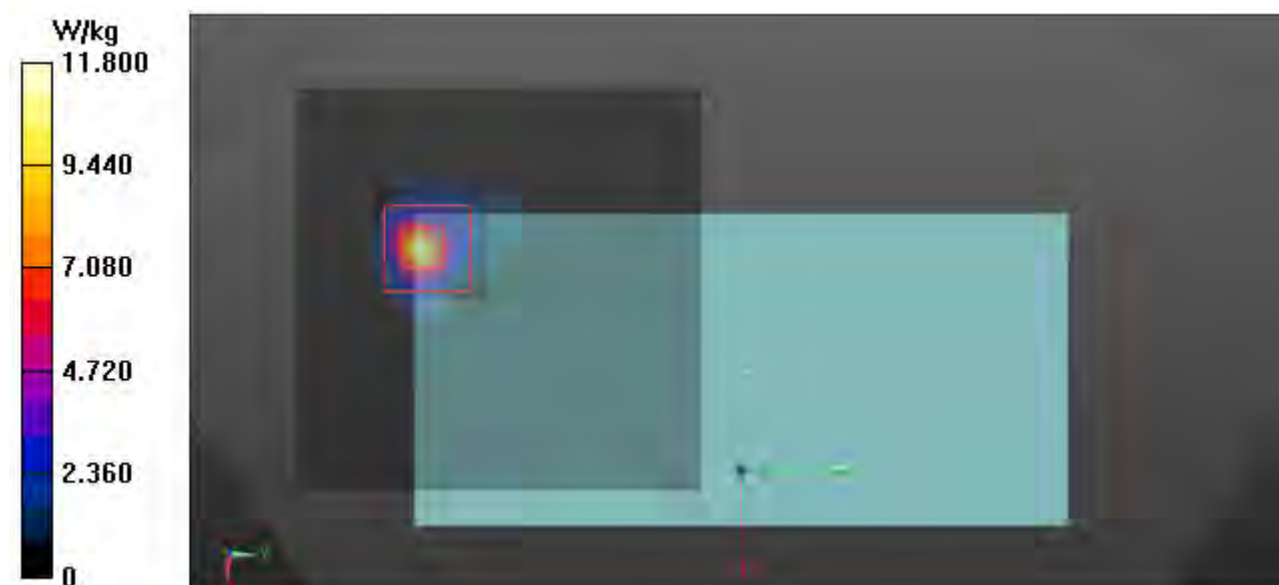

52)

Eurofins KCTL Co.,Ltd.

Measurement Report for SM-A245M_DSN, BACK, Custom Band NFC, UID 0 -, Channel 13600 (13.6MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
SM-A245M_DSN, SAMSUNG	162.1 x 77.6 x 8.0	67E3172167337ECE	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 0--	13.6, 13600	15.42	0.724	55.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2098	HBBL-4-250 , 2023-Jan-13	EX3DV4 - SN3928, 2022-03-03	DAE4 Sn1342, 2022-05-31

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	No
Grading Ratio	N/A	N/A
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2023-01-13	2023-01-13
psSAR1g [W/kg]	0.052	0.049
psSAR8g [W/kg]	0.039	0.018
psSAR10g [W/kg]	0.037	0.017
psAPD (1.0cm2, sq) [W/m2]		0.494
psAPD (4.0cm2, sq) [W/m2]		0.364
Power Drift [dB]		0.05

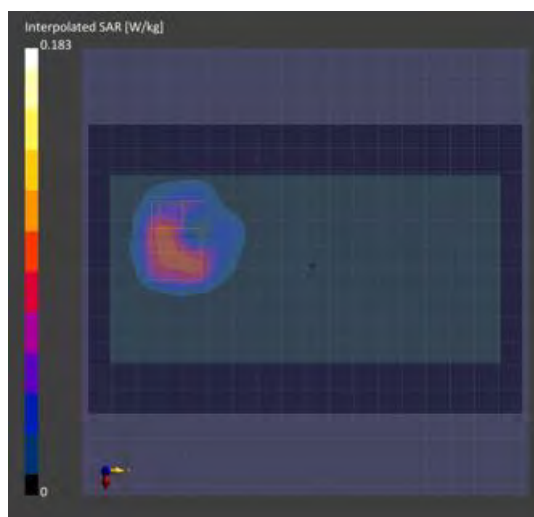

Appendixes List

Appendix A	A.1 Probe Calibration certificate (EX3DV4_3928) A.2 Probe Calibration certificate (EX3DV4_7540) A.3 Probe Calibration certificate (EX3DV4_7770) A.4 Confined Loop Antennas Calibration certificate (CLA13_1019) A.5 Dipole Calibration certificate (D750V3_1183) A.6 Dipole Calibration certificate (D850V2_1006) A.7 Dipole Calibration certificate (D1750V2_1072) A.8 Dipole Calibration certificate (D1900V2_5d160) A.9 Dipole Calibration certificate (D2450V2_895) A.10 Dipole Calibration certificate (D2600V2_1050) A.11 Dipole Calibration certificate (D5GHzV2_1134)
Appendix B	SAR Tissue Specification
Appendix C	Power Reduction Verification
Appendix D	#Antenna Location & Distance
Appendix E	EUT Photo
Appendix F	Test Setup Photo