



## SAR EVALUATION REPORT

**Applicant Name:**

Samsung Electronics, Co. Ltd.  
129, Samsung-ro, Maetan dong,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do 443-742, Korea

**Date of Testing:**

05/14/15 - 05/26/15

**Test Site/Location:**

PCTEST Lab, Columbia, MD, USA

**Document Serial No.:**

0Y1505130868.A3L

**FCC ID:**

**A3LSMA8000**

**APPLICANT:**

**SAMSUNG ELECTRONICS, CO. LTD.**

**DUT Type:**

Portable Handset

**Application Type:**

Certification

**FCC Rule Part(s):**

CFR §2.1093

**Model(s):**

SM-A8000

| Equipment Class                            | Band & Mode        | Tx Frequency          | SAR              |                       |                     |                        |
|--------------------------------------------|--------------------|-----------------------|------------------|-----------------------|---------------------|------------------------|
|                                            |                    |                       | 1 gm Head (W/kg) | 1 gm Body-Worn (W/kg) | 1 gm Hotspot (W/kg) | 10 gm Extremity (W/kg) |
| PCE                                        | GSM/GPRS/EDGE 850  | 824.20 - 848.80 MHz   | < 0.1            | 0.77                  | 1.10                |                        |
| PCE                                        | UMTS 850           | 826.40 - 846.60 MHz   | 0.10             | 0.44                  | 0.38                |                        |
| PCE                                        | GSM/GPRS/EDGE 1900 | 1850.20 - 1909.80 MHz | < 0.1            | 0.93                  | 1.09                |                        |
| PCE                                        | UMTS 1900          | 1852.4 - 1907.6 MHz   | 0.12             | 0.62                  | 0.67                |                        |
| PCE                                        | LTE Band 41        | 2557.5 - 2652.5 MHz   | < 0.1            | 0.55                  | 0.79                |                        |
| DTS                                        | 2.4 GHz WLAN       | 2412 - 2462 MHz       | 0.58             | < 0.1                 | < 0.1               |                        |
| NII                                        | U-NII-1            | 5180 - 5240 MHz       | N/A              |                       |                     |                        |
| NII                                        | U-NII-2A           | 5260 - 5320 MHz       | 0.62             | < 0.1                 |                     | 0.32                   |
| NII                                        | U-NII-2C           | 5500 - 5700 MHz       | 0.69             | < 0.1                 |                     | 0.36                   |
| NII                                        | U-NII-3            | 5745 - 5825 MHz       | 0.56             | < 0.1                 | < 0.1               |                        |
| DSS/DTS                                    | Bluetooth          | 2402 - 2480 MHz       | N/A              |                       |                     |                        |
| Simultaneous SAR per KDB 690783 D01v01r03: |                    |                       | 0.81             | 1.15                  | 1.19                | 0.36                   |

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

  
Randy Ortanez  
President



The SAR Tick is an initiative of the Mobile Manufacturers Forum (MMF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MMF. Further details can be obtained by emailing: sartick@mmfai.info.

|                                          |                                                                                     |                                      |                                                                                       |                                        |
|------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMA8000                |  | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                           | <b>DUT Type:</b><br>Portable Handset |                                                                                       | Page 1 of 47                           |

# T A B L E O F C O N T E N T S

|                                                              |                                                  |    |
|--------------------------------------------------------------|--------------------------------------------------|----|
| 1                                                            | DEVICE UNDER TEST .....                          | 3  |
| 2                                                            | LTE INFORMATION .....                            | 8  |
| 3                                                            | INTRODUCTION .....                               | 9  |
| 4                                                            | DOSIMETRIC ASSESSMENT .....                      | 10 |
| 5                                                            | DEFINITION OF REFERENCE POINTS .....             | 11 |
| 6                                                            | TEST CONFIGURATION POSITIONS FOR HANDSETS .....  | 12 |
| 7                                                            | RF EXPOSURE LIMITS .....                         | 15 |
| 8                                                            | FCC MEASUREMENT PROCEDURES.....                  | 16 |
| 9                                                            | RF CONDUCTED POWERS.....                         | 21 |
| 10                                                           | SYSTEM VERIFICATION.....                         | 29 |
| 11                                                           | SAR DATA SUMMARY .....                           | 31 |
| 12                                                           | FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS..... | 38 |
| 13                                                           | SAR MEASUREMENT VARIABILITY .....                | 41 |
| 14                                                           | EQUIPMENT LIST .....                             | 42 |
| 15                                                           | MEASUREMENT UNCERTAINTIES .....                  | 43 |
| 16                                                           | CONCLUSION.....                                  | 45 |
| 17                                                           | REFERENCES .....                                 | 46 |
| APPENDIX A: SAR TEST PLOTS                                   |                                                  |    |
| APPENDIX B: SAR DIPOLE VERIFICATION PLOTS                    |                                                  |    |
| APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES        |                                                  |    |
| APPENDIX D: SAR TISSUE SPECIFICATIONS                        |                                                  |    |
| APPENDIX E: SAR SYSTEM VALIDATION                            |                                                  |    |
| APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS |                                                  |    |

|                                          |                                                                                     |                                      |                                                                                       |                                        |
|------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMA8000                |  | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                           | <b>DUT Type:</b><br>Portable Handset | Page 2 of 47                                                                          |                                        |

# 1 DEVICE UNDER TEST

## 1.1 Device Overview

| Band & Mode        | Operating Modes | Tx Frequency          |
|--------------------|-----------------|-----------------------|
| GSM/GPRS/EDGE 850  | Voice/Data      | 824.20 - 848.80 MHz   |
| UMTS 850           | Voice/Data      | 826.40 - 846.60 MHz   |
| GSM/GPRS/EDGE 1900 | Voice/Data      | 1850.20 - 1909.80 MHz |
| UMTS 1900          | Voice/Data      | 1852.4 - 1907.6 MHz   |
| LTE Band 41        | Voice/Data      | 2557.5 - 2652.5 MHz   |
| 2.4 GHz WLAN       | Data            | 2412 - 2462 MHz       |
| U-NII-1            | Data            | 5180 - 5240 MHz       |
| U-NII-2A           | Data            | 5260 - 5320 MHz       |
| U-NII-2C           | Data            | 5500 - 5700 MHz       |
| U-NII-3            | Data            | 5745 - 5825 MHz       |
| Bluetooth          | Data            | 2402 - 2480 MHz       |
| NFC                | Data            | 13.56 MHz             |
| ANT+               | Data            | 2402 - 2480 MHz       |

## 1.1 Power Reduction for SAR

This device utilizes a single step independent power reduction mechanism for SAR compliance. For the main transmitter, the device utilizes power reduction under portable hotspot conditions for UMTS B5/2. All UMTS B5/2 hotspot SAR evaluations for this device were performed at reduced output power conditions for simultaneous transmission purposes. The reduced powers were confirmed via conducted power measurements at the RF port (See Section 9). Detailed descriptions of the hotspot power reduction are included in the operational description.

## 1.2 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v05.

### 1.2.1 Maximum Power

| Mode / Band        |         | Voice (dBm) | Burst Average GMSK (dBm) |      |      |      | Burst Average 8-PSK (dBm) |      |      |      |
|--------------------|---------|-------------|--------------------------|------|------|------|---------------------------|------|------|------|
|                    |         | 1 TX Slot   | 1 TX Slot                | 2 TX | 3 TX | 4 TX | 1 TX Slot                 | 2 TX | 3 TX | 4 TX |
| GSM/GPRS/EDGE 850  | Maximum | 33.5        | 33.5                     | 30.0 | 28.5 | 26.5 | 27.5                      | 26.5 | 25.5 | 25.0 |
|                    | Nominal | 33.0        | 33.0                     | 29.5 | 28.0 | 26.0 | 27.0                      | 26.0 | 25.0 | 24.5 |
| GSM/GPRS/EDGE 1900 | Maximum | 30.5        | 30.5                     | 27.5 | 26.0 | 25.0 | 26.5                      | 25.5 | 23.5 | 23.0 |
|                    | Nominal | 30.0        | 30.0                     | 27.0 | 25.5 | 24.5 | 26.0                      | 25.0 | 23.0 | 22.5 |

| Mode / Band            |         | Modulated Average (dBm) |                   |                   |                      |
|------------------------|---------|-------------------------|-------------------|-------------------|----------------------|
|                        |         | 3GPP RMC Rel. 99        | 3GPP HSDPA Rel. 5 | 3GPP HSUPA Rel. 6 | 3GPP DC-HSDPA Rel. 8 |
| UMTS Band 5 (850 MHz)  | Maximum | 23.5                    | 22.5              | 22.5              | 23.0                 |
|                        | Nominal | 23.0                    | 22.0              | 22.0              | 22.5                 |
| UMTS Band 2 (1900 MHz) | Maximum | 23.0                    | 22.5              | 22.5              | 22.5                 |
|                        | Nominal | 22.5                    | 22.0              | 22.0              | 22.0                 |

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset |                                                                                       | Page 3 of 47                    |

| Mode / Band |         | Modulated Average (dBm) |
|-------------|---------|-------------------------|
| LTE Band 41 | Maximum | 24.5                    |
|             | Nominal | 24.0                    |

| Mode / Band            |         | Modulated Average (dBm) |
|------------------------|---------|-------------------------|
| IEEE 802.11b (2.4 GHz) | Maximum | 17.5                    |
|                        | Nominal | 17.0                    |
| IEEE 802.11g (2.4 GHz) | Maximum | 13.5                    |
|                        | Nominal | 13.0                    |
| IEEE 802.11n (2.4 GHz) | Maximum | 12.5                    |
|                        | Nominal | 12.0                    |
| Bluetooth              | Maximum | 12.0                    |
|                        | Nominal | 11.5                    |
| Bluetooth LE           | Maximum | 2.5                     |
|                        | Nominal | 2.0                     |

| Mode / Band          |         | Modulated Average (dBm) |                  |
|----------------------|---------|-------------------------|------------------|
|                      |         | 20 MHz Bandwidth        | 40 MHz Bandwidth |
| IEEE 802.11a (5 GHz) | Maximum | 11.5                    |                  |
|                      | Nominal | 11.0                    |                  |
| IEEE 802.11n (5 GHz) | Maximum | 11.5                    | 11.5             |
|                      | Nominal | 11.0                    | 11.0             |

### 1.2.2 Reduced Power – Hotspot Mode Active

| Mode / Band            |         | Modulated Average (dBm) |                   |                   |                      |
|------------------------|---------|-------------------------|-------------------|-------------------|----------------------|
|                        |         | 3GPP RMC Rel. 99        | 3GPP HSDPA Rel. 5 | 3GPP HSUPA Rel. 6 | 3GPP DC-HSDPA Rel. 8 |
| UMTS Band 5 (850 MHz)  | Maximum | 20.5                    | 20.5              | 20.5              | 20.5                 |
|                        | Nominal | 20.0                    | 20.0              | 20.0              | 20.0                 |
| UMTS Band 2 (1900 MHz) | Maximum | 20.5                    | 20.5              | 20.5              | 20.5                 |
|                        | Nominal | 20.0                    | 20.0              | 20.0              | 20.0                 |

## 1.3 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in Appendix F. Since the diagonal dimension of this device is > 160 mm and <200 mm, it is considered a “phablet.”.

**Table 1-1**  
**Mobile Hotspot Sides for SAR Testing**

| Mode             | Exposure Condition | Back | Front | Top | Bottom | Right | Left |
|------------------|--------------------|------|-------|-----|--------|-------|------|
| GPRS 850         | Hotspot            | Yes  | Yes   | No  | Yes    | No    | Yes  |
| UMTS 850         | Hotspot            | Yes  | Yes   | No  | Yes    | No    | Yes  |
| GPRS 1900        | Hotspot            | Yes  | Yes   | No  | Yes    | No    | Yes  |
| UMTS 1900        | Hotspot            | Yes  | Yes   | No  | Yes    | No    | Yes  |
| LTE Band 41      | Hotspot            | Yes  | Yes   | No  | Yes    | No    | Yes  |
| 2.4 GHz WLAN     | Hotspot            | Yes  | Yes   | Yes | No     | No    | Yes  |
| 5.8 GHz WLAN     | Hotspot            | Yes  | Yes   | Yes | No     | No    | Yes  |
| 5.2-5.7 GHz WLAN | Extremity          | Yes  | Yes   | Yes | No     | No    | Yes  |

Note: Particular DUT edges were not required to be evaluated for Wireless Router SAR or Extremity SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02 guidance, page 2 and FCC KDB 648474 D04v01r01. The distances between the transmit antennas and the edges of the device are included in the filing.

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset |                                                                                       | Page 4 of 47                    |

## 1.4 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device. Therefore, all SAR tests were performed with the NFC incorporated. A diagram showing the location of the NFC antenna can be found in Appendix F

## 1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D05v01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 1-1 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



Figure 1-1  
Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v05 3) procedures.

Table 1-2  
Simultaneous Transmission Scenarios

| No. | Capable Transmit Configuration | Head | Body-Worn Accessory | Wireless Router | Extremity |
|-----|--------------------------------|------|---------------------|-----------------|-----------|
| 1   | GSM voice + 2.4 GHz Wi-Fi      | Yes  | Yes                 | N/A             | Yes       |
| 2   | GSM voice + 5 GHz Wi-Fi        | Yes  | Yes                 | N/A             | Yes       |
| 3   | GSM voice + 2.4 GHz Bluetooth  | N/A  | Yes                 | N/A             | Yes       |
| 4   | UMTS + 2.4 GHz Wi-Fi           | Yes  | Yes                 | Yes             | Yes       |
| 5   | UMTS + 5 GHz Wi-Fi             | Yes  | Yes                 | Yes             | Yes       |
| 6   | UMTS + 2.4 GHz Bluetooth       | N/A  | Yes                 | N/A             | Yes       |
| 7   | LTE + 2.4 GHz Wi-Fi            | Yes  | Yes                 | Yes             | Yes       |
| 8   | LTE + 5 GHz Wi-Fi              | Yes  | Yes                 | Yes             | Yes       |
| 9   | LTE + 2.4 GHz Bluetooth        | N/A  | Yes                 | N/A             | Yes       |
| 10  | GPRS/EDGE + 2.4 GHz Wi-Fi      | N/A  | N/A                 | Yes             | Yes       |
| 11  | GPRS/EDGE + 5 GHz Wi-Fi        | N/A  | N/A                 | Yes             | Yes       |

- 2.4 GHz WLAN, 5 GHz WLAN, and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
- All licensed modes share the same antenna path and cannot transmit simultaneously.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
- 5 GHz Wireless Router is only supported for the U-NII-3 by S/W, therefore U-NII-1, U-NII-2A, and U-NII-2C were not evaluated for wireless router conditions.
- This device supports VoLTE.

|                                   |                                                                                                                                   |                               |                                                                                       |                                 |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                                                                | DUT Type:<br>Portable Handset |                                                                                       | Page 5 of 47                    |

## 1.6 Miscellaneous SAR Test Considerations

### (A) WIFI/BT

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-1, U-NII-2A & U-NII-2C WIFI, only 2.4 GHz and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02.

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB 248227 D01 Wi-Fi SAR v02.

Per FCC KDB 447498 D01v05, the 1g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, body-worn Bluetooth SAR was not required;  $[(16/5) * \sqrt{2.480}] = 1.7 < 3.0$ . Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

Per FCC KDB 447498 D01v05, the 10g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 7.5$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, extremity Bluetooth SAR was not required;  $[(16/5) * \sqrt{2.480}] = 5 < 7.5$ . Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

Per FCC KDB Publication 648474 D04v01r01, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Extremity SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-1, U-NII-2A & U-NII-2C WLAN, extremity SAR tests were performed. Extremity SAR was not evaluated for 2.4 GHz and U-NII-3 WLAN operations since wireless router 1g SAR was < 1.2 W/kg.

### (B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r03.

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset |                                                                                       | Page 6 of 47                    |

LTE Band 41 supports narrow band frequencies 2555 – 2655 MHz.

Per FCC KDB Publication 648474 D04v01r01, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Therefore, extremity SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg when scaled to the maximum allowed output power tolerance. Extremity SAR was not evaluated for licensed technologies since wireless router 1g SAR was < 1.2 W/kg for these modes.

## 1.7 Guidance Applied

- IEEE 1528-2003
- FCC KDB Publication 941225 D01v03, D05v02r03, D06v02 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01 Wi-Fi SAR v02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v05r02 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r03, D02v01r01 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D03-D04 (Phablet Procedures)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)

## 1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

| Band/Mode          | Head Serial Number | Body-Worn Serial Number | Hotspot Serial Number | Extremity Serial Number |
|--------------------|--------------------|-------------------------|-----------------------|-------------------------|
| GSM/GPRS/EDGE 850  | 01ZKB              | 01ZKB                   | 01ZKB                 | -                       |
| UMTS 850           | 01YKW              | 01YKW                   | 01Y3R                 | -                       |
| GSM/GPRS/EDGE 1900 | 01ZKB              | 01ZKB                   | 01ZKB                 | -                       |
| UMTS 1900          | 01YKW              | 01YKW                   | 01YKW                 | -                       |
| LTE Band 41        | 01YKW              | 01YKW                   | 01YKW                 | -                       |
| 2.4 GHz WLAN       | 01YKW              | 01ZCY                   | 01ZCY                 | -                       |
| 5.8 GHz WLAN       | 01YKW              | 01ZCY                   | 01ZCY                 | -                       |
| 5.2-5.7 GHz WLAN   | 01YKW              | 01ZCY                   | -                     | 01ZCY                   |

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset | Page 7 of 47                                                                          |                                 |

## 2 LTE INFORMATION

| LTE Information                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                |              |                |                |
|-------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|--------------|----------------|----------------|
| <b>FCC ID</b>                                                                                                     | <b>A3LSMA8000</b>                                                                                                                                                                                                                                                                                                                                                                                                                                            |                |              |                |                |
| Form Factor                                                                                                       | Portable Handset                                                                                                                                                                                                                                                                                                                                                                                                                                             |                |              |                |                |
| Frequency Range of each LTE transmission band                                                                     | LTE Band 41 (2557.5 - 2652.5 MHz)                                                                                                                                                                                                                                                                                                                                                                                                                            |                |              |                |                |
| Channel Bandwidths                                                                                                | LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz                                                                                                                                                                                                                                                                                                                                                                                                                   |                |              |                |                |
| Channel Numbers and Frequencies (MHz)                                                                             | Low                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Low-Mid        | Mid          | High-Mid       | High           |
| LTE Band 41: 5 MHz                                                                                                | 2557.5 (40265)                                                                                                                                                                                                                                                                                                                                                                                                                                               | 2589.2 (40582) |              | 2620.8 (40898) | 2652.5 (41215) |
| LTE Band 41: 10 MHz                                                                                               | 2560 (40290)                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 2590 (40590)   |              | 2620 (40890)   | 2650 (41190)   |
| LTE Band 41: 15 MHz                                                                                               | 2562.5 (40315)                                                                                                                                                                                                                                                                                                                                                                                                                                               |                | 2605 (40740) |                | 2647.5 (41165) |
| LTE Band 41: 20 MHz                                                                                               | 2565 (40340)                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                | 2605 (40740) |                | 2645 (41140)   |
| UE Category                                                                                                       | 4                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                |              |                |                |
| Modulations Supported in UL                                                                                       | QPSK, 16QAM                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                |              |                |                |
| LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3~6.2.5? (manufacturer attestation to be provided) | YES                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                |              |                |                |
| A-MPR (Additional MPR) disabled for SAR Testing?                                                                  | YES                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                |              |                |                |
| LTE Carrier Aggregation Additional Information                                                                    | <p>This device does not support full CA features on 3GPP Release 10. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. Due to carrier capability, only the combinations listed above are supported. The following LTE Release 10 Features are not supported: Relay, HetNet, Enhanced MIMO, eICl, WIFI Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA, Downlink CA.</p> |                |              |                |                |

|                                          |                                                                                     |                                      |                                                                                       |                                        |
|------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMA8000                |  | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                           | <b>DUT Type:</b><br>Portable Handset | Page 8 of 47                                                                          |                                        |



### 3 INTRODUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

#### 3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

**Equation 3-1**  
**SAR Mathematical Equation**

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$

**SAR is expressed in units of Watts per Kilogram (W/kg).**

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m<sup>3</sup>)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]


|                                          |                                                                                                                                   |                                      |                                                                                       |                                        |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMA8000                       |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                                                                         | <b>DUT Type:</b><br>Portable Handset |                                                                                       | Page 9 of 47                           |

## 4 DOSIMETRIC ASSESSMENT

### 4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
  - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
  - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.



**Figure 4-1**  
**Sample SAR Area**  
**Scan**

**Table 4-1**  
**Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01\***

| Frequency | Maximum Area Scan Resolution (mm)<br>( $\Delta x_{\text{area}}, \Delta y_{\text{area}}$ ) | Maximum Zoom Scan Resolution (mm)<br>( $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$ ) | Maximum Zoom Scan Spatial Resolution (mm) |                             |                                      | Minimum Zoom Scan Volume (mm)<br>(x,y,z) |
|-----------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-------------------------------------------|-----------------------------|--------------------------------------|------------------------------------------|
|           |                                                                                           |                                                                                           | Uniform Grid                              | Graded Grid                 |                                      |                                          |
|           |                                                                                           |                                                                                           |                                           | $\Delta z_{\text{zoom}}(n)$ | $\Delta z_{\text{zoom}}(1)^*$        |                                          |
| ≤ 2 GHz   | ≤ 15                                                                                      | ≤ 8                                                                                       | ≤ 5                                       | ≤ 4                         | ≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$ | ≥ 30                                     |
| 2-3 GHz   | ≤ 12                                                                                      | ≤ 5                                                                                       | ≤ 5                                       | ≤ 4                         | ≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$ | ≥ 30                                     |
| 3-4 GHz   | ≤ 12                                                                                      | ≤ 5                                                                                       | ≤ 4                                       | ≤ 3                         | ≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$ | ≥ 28                                     |
| 4-5 GHz   | ≤ 10                                                                                      | ≤ 4                                                                                       | ≤ 3                                       | ≤ 2.5                       | ≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$ | ≥ 25                                     |
| 5-6 GHz   | ≤ 10                                                                                      | ≤ 4                                                                                       | ≤ 2                                       | ≤ 2                         | ≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$ | ≥ 22                                     |

\*Also compliant to IEEE 1528-2013 Table 6


|                                          |                                                                                     |                                      |                                                                                       |                                        |
|------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMA8000                |  | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                           | <b>DUT Type:</b><br>Portable Handset |                                                                                       | Page 10 of 47                          |

## 5

## DEFINITION OF REFERENCE POINTS

### 5.1 EAR REFERENCE POINT


Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




**Figure 5-1**  
Close-Up Side view  
of ERP

### 5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

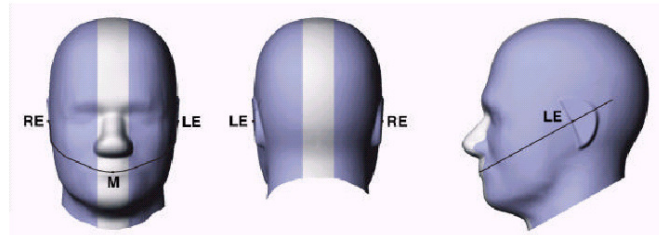

**Figure 5-2**  
Front, back and side view of SAM Twin Phantom

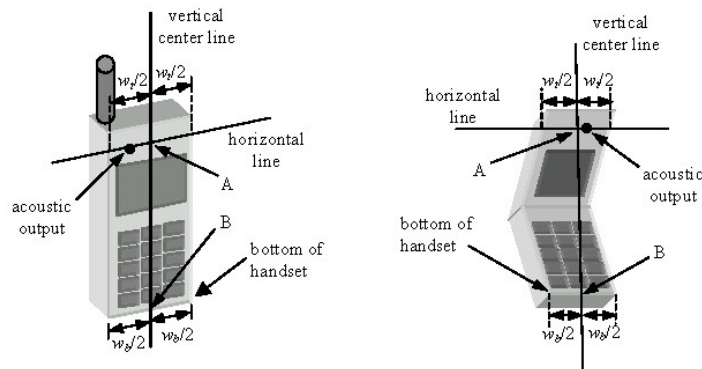

**Figure 5-3**  
Handset Vertical Center & Horizontal Line Reference Points

|                                   |                                                                                                                                   |                               |                                                                                       |                                 |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                                                                | DUT Type:<br>Portable Handset |                                                                                       | Page 11 of 47                   |

## 6


## TEST CONFIGURATION POSITIONS FOR HANDSETS

### 6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ .

### 6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

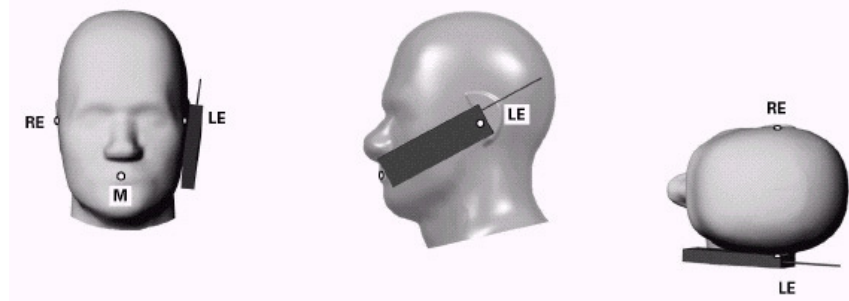

**Figure 6-1 Front, Side and Top View of Cheek Position**


2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

### 6.3 Positioning for Ear / 15° Tilt


With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

|                                   |                                                                                                                                   |                               |                                                                                       |                                 |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                                                                | DUT Type:<br>Portable Handset |                                                                                       | Page 12 of 47                   |

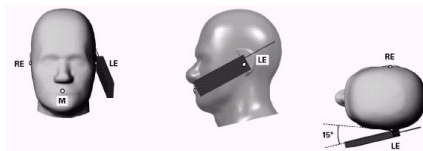

**Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position**



**Figure 6-3 Side view w/ relevant markings**


## 6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones. Per IEEE 1528-2013, a rotated SAM phantom is necessary to allow probe access to such regions. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed from the table for emptying and cleaning.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04\_v01. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

## 6.5 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v05 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.



**Figure 6-4 Sample Body-Worn Diagram**

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset |                                                                                       | Page 13 of 47                   |



Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

## 6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 44798 D01v05 should be applied to determine SAR test requirements.

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC minitables that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04 v01r01DR04 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna  $\leq 25$  mm from that surface or edge, in direct contact with the phantom, for 10-g SAR. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g SAR > 1.2 W/kg when scaled to the maximum allowed output power tolerance.

## 6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset |                                                                                       | Page 14 of 47                   |

## 7 RF EXPOSURE LIMITS

### 7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### 7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1**  
**SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

| HUMAN EXPOSURE LIMITS                                               |                                                                              |                                                                      |
|---------------------------------------------------------------------|------------------------------------------------------------------------------|----------------------------------------------------------------------|
|                                                                     | UNCONTROLLED<br>ENVIRONMENT<br><i>General Population</i><br>(W/kg) or (mW/g) | CONTROLLED<br>ENVIRONMENT<br><i>Occupational</i><br>(W/kg) or (mW/g) |
| <b>Peak Spatial Average SAR</b><br>Head                             | 1.6                                                                          | 8.0                                                                  |
| <b>Whole Body SAR</b>                                               | 0.08                                                                         | 0.4                                                                  |
| <b>Peak Spatial Average SAR</b><br>Hands, Feet, Ankle, Wrists, etc. | 4.0                                                                          | 20                                                                   |

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

|                                          |                                                                                                                                   |                                      |                                                                                       |                                        |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMA8000                       |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                                                                         | <b>DUT Type:</b><br>Portable Handset | Page 15 of 47                                                                         |                                        |

## 8 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

### 8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v05, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r02.

### 8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is  $\leq 0.25$  dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is  $\leq 1.2$  W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

### 8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

### 8.4 SAR Measurement Conditions for UMTS

#### 8.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset |                                                                                       | Page 16 of 47                   |



#### 8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

#### 8.4.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported SAR configuration in 12.2 kbps RMC.

#### 8.4.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

#### 8.4.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

#### 8.4.6 SAR Measurement Conditions for DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

### 8.5 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r03 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

#### 8.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

|                                          |                                                                                                                                   |                                      |                                                                                       |                                        |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMA8000                       |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                                                                         | <b>DUT Type:</b><br>Portable Handset | Page 17 of 47                                                                         |                                        |

### 8.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

### 8.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

### 8.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r03:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
  - i. The required channel and offset combination with the highest maximum output power is required for SAR.
  - ii. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
  - iii. When the reported SAR for a required test channel is  $> 1.45$  W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is  $< 0.8$  W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to  $\frac{1}{2}$  dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is  $< 1.45$  W/kg.

### 8.5.5 TDD

LTE TDD testing is performed using guidance from FCC KDB 941225 D05v02r03 and the SAR test guidance provided in April 2013 TCB workshop notes. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r03. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

## 8.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01 Wi-Fi SAR v02 for more details.

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset |                                                                                       | Page 18 of 47                   |

### 8.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

### 8.6.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is  $> 1.2$  W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is  $> 1.2$  W/kg.

### 8.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz are grouped with the 5.8 GHz channels in U-NII-3 band or §15.247 5.8 GHz band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

### 8.6.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.

|                                          |                                                                                                                                   |                                      |                                                                                       |                                        |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMA8000                       |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                                                                         | <b>DUT Type:</b><br>Portable Handset |                                                                                       | Page 19 of 47                          |

### 8.6.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is  $> 1.2$  W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

### 8.6.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

### 8.6.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is  $\leq 0.8$  W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is  $\leq 1.2$  W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.6.6).

### 8.6.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is  $\leq 1.2$  W/kg, no additional SAR tests for the subsequent test configurations are required.

|                                          |                                                                                                                                   |                                      |                                                                                       |                                        |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMA8000                       |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                                                                         | <b>DUT Type:</b><br>Portable Handset |                                                                                       | Page 20 of 47                          |

## 9 RF CONDUCTED POWERS

### 9.1 GSM Conducted Powers

|          |               | Maximum Burst-Averaged Output Power            |                         |                         |                         |                         |                         |                         |                         |                         |
|----------|---------------|------------------------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
|          |               | Voice                                          | GPRS/EDGE Data (GMSK)   |                         |                         |                         | EDGE Data (8-PSK)       |                         |                         |                         |
| Band     | Channel       | GSM [dBm]<br>CS (1 Slot)                       | GPRS [dBm]<br>1 Tx Slot | GPRS [dBm]<br>2 Tx Slot | GPRS [dBm]<br>3 Tx Slot | GPRS [dBm]<br>4 Tx Slot | EDGE [dBm]<br>1 Tx Slot | EDGE [dBm]<br>2 Tx Slot | EDGE [dBm]<br>3 Tx Slot | EDGE [dBm]<br>4 Tx Slot |
| GSM 850  | 128           | 33.22                                          | 33.37                   | 29.14                   | <b>27.78</b>            | 25.41                   | 26.23                   | 26.07                   | 24.99                   | 23.80                   |
|          | 190           | 33.34                                          | 33.23                   | 29.37                   | <b>28.06</b>            | 25.82                   | 26.67                   | 26.15                   | 25.03                   | 23.85                   |
|          | 251           | 33.26                                          | 33.29                   | 29.17                   | <b>27.73</b>            | 25.69                   | 26.32                   | 26.18                   | 25.11                   | 23.96                   |
| GSM 1900 | 512           | 29.70                                          | 29.67                   | 26.52                   | 24.90                   | <b>23.57</b>            | 25.17                   | 24.46                   | 23.02                   | 21.80                   |
|          | 661           | 29.90                                          | 29.85                   | 26.60                   | 24.87                   | <b>23.70</b>            | 25.21                   | 24.52                   | 23.05                   | 21.78                   |
|          | 810           | 30.02                                          | 29.93                   | 26.64                   | 24.99                   | <b>23.68</b>            | 25.32                   | 24.54                   | 22.95                   | 21.67                   |
|          |               | Calculated Maximum Frame-Averaged Output Power |                         |                         |                         |                         |                         |                         |                         |                         |
|          |               | Voice                                          | GPRS/EDGE Data (GMSK)   |                         |                         |                         | EDGE Data (8-PSK)       |                         |                         |                         |
| Band     | Channel       | GSM [dBm]<br>CS (1 Slot)                       | GPRS [dBm]<br>1 Tx Slot | GPRS [dBm]<br>2 Tx Slot | GPRS [dBm]<br>3 Tx Slot | GPRS [dBm]<br>4 Tx Slot | EDGE [dBm]<br>1 Tx Slot | EDGE [dBm]<br>2 Tx Slot | EDGE [dBm]<br>3 Tx Slot | EDGE [dBm]<br>4 Tx Slot |
| GSM 850  | 128           | 24.19                                          | 24.34                   | 23.12                   | <b>23.52</b>            | 22.40                   | 17.20                   | 20.05                   | 20.73                   | 20.79                   |
|          | 190           | 24.31                                          | 24.20                   | 23.35                   | <b>23.80</b>            | 22.81                   | 17.64                   | 20.13                   | 20.77                   | 20.84                   |
|          | 251           | 24.23                                          | 24.26                   | 23.15                   | <b>23.47</b>            | 22.68                   | 17.29                   | 20.16                   | 20.85                   | 20.95                   |
| GSM 1900 | 512           | 20.67                                          | 20.64                   | 20.50                   | 20.64                   | <b>20.56</b>            | 16.14                   | 18.44                   | 18.76                   | 18.79                   |
|          | 661           | 20.87                                          | 20.82                   | 20.58                   | 20.61                   | <b>20.69</b>            | 16.18                   | 18.50                   | 18.79                   | 18.77                   |
|          | 810           | 20.99                                          | 20.90                   | 20.62                   | 20.73                   | <b>20.67</b>            | 16.29                   | 18.52                   | 18.69                   | 18.66                   |
| GSM 850  | Frame         | 23.97                                          | 23.97                   | 23.48                   | <b>23.74</b>            | 22.99                   | 17.97                   | 19.98                   | 20.74                   | 21.49                   |
| GSM 1900 | Avg. Targets: | 20.97                                          | 20.97                   | 20.98                   | 21.24                   | <b>21.49</b>            | 16.97                   | 18.98                   | 18.74                   | 19.49                   |

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

**GSM Class: B**  
**GPRS Multislot class: 33**  
**EDGE Multislot class: 33**  
**DTM Multislot Class: N/A**



**Figure 9-1**  
**Power Measurement Setup**

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset | Page 21 of 47                                                                         |                                 |

## 9.2 UMTS Conducted Powers

### 9.2.1 Maximum Conducted Powers

| 3GPP Release Version | Mode     | 3GPP 34.121 Subtest | Cellular Band [dBm] |       |       | PCS Band [dBm] |       |       | 3GPP MPR [dB] |
|----------------------|----------|---------------------|---------------------|-------|-------|----------------|-------|-------|---------------|
|                      |          |                     | 4132                | 4183  | 4233  | 9262           | 9400  | 9538  |               |
| 99                   | WCDMA    | 12.2 kbps RMC       | 22.74               | 22.76 | 22.74 | 21.64          | 21.74 | 21.61 | -             |
| 99                   |          | 12.2 kbps AMR       | 22.82               | 22.78 | 22.82 | 21.66          | 21.71 | 21.62 | -             |
| 6                    | HSDPA    | Subtest 1           | 21.84               | 21.69 | 21.76 | 21.62          | 21.64 | 21.40 | 0             |
| 6                    |          | Subtest 2           | 21.85               | 21.66 | 21.78 | 21.67          | 21.60 | 21.31 | 0             |
| 6                    |          | Subtest 3           | 21.29               | 21.10 | 21.25 | 21.55          | 21.33 | 21.42 | 0.5           |
| 6                    |          | Subtest 4           | 21.32               | 21.21 | 21.32 | 21.22          | 21.02 | 21.16 | 0.5           |
| 6                    | HSUPA    | Subtest 1           | 21.28               | 20.99 | 21.00 | 21.11          | 20.81 | 20.73 | 0             |
| 6                    |          | Subtest 2           | 21.00               | 20.90 | 21.03 | 21.19          | 21.17 | 21.09 | 2             |
| 6                    |          | Subtest 3           | 21.10               | 21.08 | 21.14 | 20.89          | 21.00 | 21.12 | 1             |
| 6                    |          | Subtest 4           | 20.53               | 21.02 | 21.34 | 21.41          | 21.44 | 21.22 | 2             |
| 6                    |          | Subtest 5           | 21.96               | 22.02 | 21.96 | 21.36          | 21.40 | 21.26 | 0             |
| 8                    | DC-HSDPA | Subtest 1           | 22.77               | 22.79 | 22.80 | 22.11          | 22.13 | 22.03 | 0             |
| 8                    |          | Subtest 2           | 22.80               | 22.68 | 22.75 | 22.22          | 22.09 | 22.01 | 0             |
| 8                    |          | Subtest 3           | 22.31               | 22.34 | 22.40 | 21.63          | 21.64 | 21.53 | 0.5           |
| 8                    |          | Subtest 4           | 22.32               | 22.31 | 22.38 | 21.67          | 21.66 | 21.54 | 0.5           |

### 9.2.2 Reduced Conducted Powers - Representing Hotspot Mode Active

| 3GPP Release Version | Mode     | 3GPP 34.121 Subtest | Cellular Band [dBm] |       |       | PCS Band [dBm] |       |       | 3GPP MPR [dB] |
|----------------------|----------|---------------------|---------------------|-------|-------|----------------|-------|-------|---------------|
|                      |          |                     | 4132                | 4183  | 4233  | 9262           | 9400  | 9538  |               |
| 99                   | WCDMA    | 12.2 kbps RMC       | 20.36               | 20.29 | 20.35 | 20.23          | 20.39 | 20.13 | -             |
| 99                   |          | 12.2 kbps AMR       | 20.31               | 20.32 | 20.34 | 20.26          | 20.22 | 20.19 | -             |
| 6                    | HSDPA    | Subtest 1           | 19.64               | 19.33 | 19.55 | 19.98          | 19.86 | 19.62 | 0             |
| 6                    |          | Subtest 2           | 19.65               | 19.60 | 19.62 | 19.89          | 19.82 | 19.54 | 0             |
| 6                    |          | Subtest 3           | 19.66               | 19.61 | 19.66 | 19.77          | 19.55 | 19.64 | 0.5           |
| 6                    |          | Subtest 4           | 19.56               | 19.67 | 19.61 | 19.34          | 19.25 | 19.40 | 0.5           |
| 6                    | HSUPA    | Subtest 1           | 19.01               | 18.94 | 19.12 | 19.62          | 19.14 | 19.03 | 0             |
| 6                    |          | Subtest 2           | 18.17               | 17.85 | 18.01 | 19.49          | 19.43 | 19.39 | 2             |
| 6                    |          | Subtest 3           | 17.76               | 18.03 | 18.02 | 19.41          | 19.26 | 19.32 | 1             |
| 6                    |          | Subtest 4           | 18.26               | 18.57 | 18.64 | 19.73          | 19.65 | 19.31 | 2             |
| 6                    |          | Subtest 5           | 18.50               | 18.51 | 18.66 | 20.00          | 19.97 | 19.91 | 0             |
| 8                    | DC-HSDPA | Subtest 1           | 19.16               | 19.14 | 19.17 | 20.42          | 20.41 | 20.32 | 0             |
| 8                    |          | Subtest 2           | 19.16               | 19.20 | 19.15 | 20.43          | 20.35 | 20.29 | 0             |
| 8                    |          | Subtest 3           | 19.15               | 19.11 | 19.23 | 19.87          | 19.84 | 19.78 | 0.5           |
| 8                    |          | Subtest 4           | 19.12               | 19.10 | 19.14 | 19.86          | 19.85 | 19.76 | 0.5           |

#### DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements
- The DUT supports UE category 24 for HSDPA

It is expected by the manufacturer that MPR for some HSPA subtests may be up to 1 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.



**Figure 9-2**  
**Power Measurement Setup**

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset | Page 22 of 47                                                                         |                                 |



## 9.3 LTE Conducted Powers

### 9.3.1 LTE Band 41 (Narrow Band)

Table 9-1  
LTE Band 41 (Narrow Band) Maximum Conducted Powers – 20 MHz Bandwidth

|      | Frequency [MHz] | Channel | Bandwidth [MHz] | Modulation | RB Size | RB Offset | Conducted Power [dBm] | MPR Allowed per 3GPP [dB] | MPR [dB] |
|------|-----------------|---------|-----------------|------------|---------|-----------|-----------------------|---------------------------|----------|
| Low  | 2565.0          | 40340   | 20              | QPSK       | 1       | 0         | 23.91                 | 0                         | 0        |
|      | 2565.0          | 40340   | 20              | QPSK       | 1       | 50        | 24.10                 | 0                         | 0        |
|      | 2565.0          | 40340   | 20              | QPSK       | 1       | 99        | 23.79                 | 0                         | 0        |
|      | 2565.0          | 40340   | 20              | QPSK       | 50      | 0         | 23.10                 | 0-1                       | 1        |
|      | 2565.0          | 40340   | 20              | QPSK       | 50      | 25        | 23.03                 | 0-1                       | 1        |
|      | 2565.0          | 40340   | 20              | QPSK       | 50      | 50        | 22.88                 | 0-1                       | 1        |
|      | 2565.0          | 40340   | 20              | QPSK       | 100     | 0         | 22.90                 | 0-1                       | 1        |
|      | 2565.0          | 40340   | 20              | 16-QAM     | 1       | 0         | 22.64                 | 0-1                       | 1        |
|      | 2565.0          | 40340   | 20              | 16-QAM     | 1       | 50        | 22.80                 | 0-1                       | 1        |
|      | 2565.0          | 40340   | 20              | 16-QAM     | 1       | 99        | 22.70                 | 0-1                       | 1        |
|      | 2565.0          | 40340   | 20              | 16-QAM     | 50      | 0         | 22.02                 | 0-2                       | 2        |
|      | 2565.0          | 40340   | 20              | 16-QAM     | 50      | 25        | 21.96                 | 0-2                       | 2        |
| Mid  | 2565.0          | 40340   | 20              | 16-QAM     | 50      | 50        | 21.87                 | 0-2                       | 2        |
|      | 2565.0          | 40340   | 20              | 16-QAM     | 100     | 0         | 22.14                 | 0-2                       | 2        |
|      | 2605.0          | 40740   | 20              | QPSK       | 1       | 0         | 24.08                 | 0                         | 0        |
|      | 2605.0          | 40740   | 20              | QPSK       | 1       | 50        | 24.05                 | 0                         | 0        |
|      | 2605.0          | 40740   | 20              | QPSK       | 1       | 99        | 23.92                 | 0                         | 0        |
|      | 2605.0          | 40740   | 20              | QPSK       | 50      | 0         | 22.90                 | 0-1                       | 1        |
|      | 2605.0          | 40740   | 20              | QPSK       | 50      | 25        | 22.85                 | 0-1                       | 1        |
|      | 2605.0          | 40740   | 20              | QPSK       | 50      | 50        | 22.80                 | 0-1                       | 1        |
|      | 2605.0          | 40740   | 20              | QPSK       | 100     | 0         | 22.83                 | 0-1                       | 1        |
|      | 2605.0          | 40740   | 20              | 16-QAM     | 1       | 0         | 22.52                 | 0-1                       | 1        |
|      | 2605.0          | 40740   | 20              | 16-QAM     | 1       | 50        | 22.67                 | 0-1                       | 1        |
|      | 2605.0          | 40740   | 20              | 16-QAM     | 1       | 99        | 22.65                 | 0-1                       | 1        |
| High | 2605.0          | 40740   | 20              | 16-QAM     | 50      | 0         | 22.07                 | 0-2                       | 2        |
|      | 2605.0          | 40740   | 20              | 16-QAM     | 50      | 25        | 21.85                 | 0-2                       | 2        |
|      | 2605.0          | 40740   | 20              | 16-QAM     | 50      | 50        | 21.99                 | 0-2                       | 2        |
|      | 2605.0          | 40740   | 20              | 16-QAM     | 100     | 0         | 22.02                 | 0-2                       | 2        |
|      | 2645.0          | 41140   | 20              | QPSK       | 1       | 0         | 24.12                 | 0                         | 0        |
|      | 2645.0          | 41140   | 20              | QPSK       | 1       | 50        | 24.07                 | 0                         | 0        |
|      | 2645.0          | 41140   | 20              | QPSK       | 1       | 99        | 23.83                 | 0                         | 0        |
|      | 2645.0          | 41140   | 20              | QPSK       | 50      | 0         | 23.19                 | 0-1                       | 1        |
|      | 2645.0          | 41140   | 20              | QPSK       | 50      | 25        | 22.98                 | 0-1                       | 1        |
|      | 2645.0          | 41140   | 20              | QPSK       | 50      | 50        | 22.92                 | 0-1                       | 1        |
|      | 2645.0          | 41140   | 20              | QPSK       | 100     | 0         | 22.86                 | 0-1                       | 1        |
|      | 2645.0          | 41140   | 20              | 16-QAM     | 1       | 0         | 22.50                 | 0-1                       | 1        |
|      | 2645.0          | 41140   | 20              | 16-QAM     | 1       | 50        | 22.57                 | 0-1                       | 1        |
|      | 2645.0          | 41140   | 20              | 16-QAM     | 1       | 99        | 22.58                 | 0-1                       | 1        |
|      | 2645.0          | 41140   | 20              | 16-QAM     | 50      | 0         | 22.17                 | 0-2                       | 2        |
|      | 2645.0          | 41140   | 20              | 16-QAM     | 50      | 25        | 21.90                 | 0-2                       | 2        |
|      | 2645.0          | 41140   | 20              | 16-QAM     | 50      | 50        | 21.83                 | 0-2                       | 2        |
|      | 2645.0          | 41140   | 20              | 16-QAM     | 100     | 0         | 22.08                 | 0-2                       | 2        |

|                                   |                                                                                                                                   |                               |                                                                                       |                                 |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                                                                | DUT Type:<br>Portable Handset |                                                                                       | Page 23 of 47                   |



**Table 9-2**  
**LTE Band 41 (Narrow Band) Maximum Conducted Powers – 15 MHz Bandwidth**

|      | Frequency [MHz] | Channel | Bandwidth [MHz] | Modulation | RB Size | RB Offset | Conducted Power [dBm] | MPR Allowed per 3GPP [dB] | MPR [dB] |
|------|-----------------|---------|-----------------|------------|---------|-----------|-----------------------|---------------------------|----------|
| Low  | 2562.5          | 40315   | 15              | QPSK       | 1       | 0         | 23.82                 | 0                         | 0        |
|      | 2562.5          | 40315   | 15              | QPSK       | 1       | 36        | 23.77                 | 0                         | 0        |
|      | 2562.5          | 40315   | 15              | QPSK       | 1       | 74        | 23.75                 | 0                         | 0        |
|      | 2562.5          | 40315   | 15              | QPSK       | 36      | 0         | 22.69                 | 0-1                       | 1        |
|      | 2562.5          | 40315   | 15              | QPSK       | 36      | 18        | 22.68                 | 0-1                       | 1        |
|      | 2562.5          | 40315   | 15              | QPSK       | 36      | 37        | 22.72                 | 0-1                       | 1        |
|      | 2562.5          | 40315   | 15              | QPSK       | 75      | 0         | 22.60                 | 0-1                       | 1        |
|      | 2562.5          | 40315   | 15              | 16-QAM     | 1       | 0         | 23.16                 | 0-1                       | 1        |
|      | 2562.5          | 40315   | 15              | 16-QAM     | 1       | 36        | 22.88                 | 0-1                       | 1        |
|      | 2562.5          | 40315   | 15              | 16-QAM     | 1       | 74        | 22.83                 | 0-1                       | 1        |
|      | 2562.5          | 40315   | 15              | 16-QAM     | 36      | 0         | 21.63                 | 0-2                       | 2        |
|      | 2562.5          | 40315   | 15              | 16-QAM     | 36      | 18        | 21.72                 | 0-2                       | 2        |
|      | 2562.5          | 40315   | 15              | 16-QAM     | 36      | 37        | 21.65                 | 0-2                       | 2        |
|      | 2562.5          | 40315   | 15              | 16-QAM     | 75      | 0         | 21.77                 | 0-2                       | 2        |
| Mid  | 2605.0          | 40740   | 15              | QPSK       | 1       | 0         | 23.92                 | 0                         | 0        |
|      | 2605.0          | 40740   | 15              | QPSK       | 1       | 36        | 23.57                 | 0                         | 0        |
|      | 2605.0          | 40740   | 15              | QPSK       | 1       | 74        | 23.54                 | 0                         | 0        |
|      | 2605.0          | 40740   | 15              | QPSK       | 36      | 0         | 22.68                 | 0-1                       | 1        |
|      | 2605.0          | 40740   | 15              | QPSK       | 36      | 18        | 22.54                 | 0-1                       | 1        |
|      | 2605.0          | 40740   | 15              | QPSK       | 36      | 37        | 22.60                 | 0-1                       | 1        |
|      | 2605.0          | 40740   | 15              | QPSK       | 75      | 0         | 22.53                 | 0-1                       | 1        |
|      | 2605.0          | 40740   | 15              | 16-QAM     | 1       | 0         | 22.92                 | 0-1                       | 1        |
|      | 2605.0          | 40740   | 15              | 16-QAM     | 1       | 36        | 23.01                 | 0-1                       | 1        |
|      | 2605.0          | 40740   | 15              | 16-QAM     | 1       | 74        | 23.04                 | 0-1                       | 1        |
|      | 2605.0          | 40740   | 15              | 16-QAM     | 36      | 0         | 21.56                 | 0-2                       | 2        |
|      | 2605.0          | 40740   | 15              | 16-QAM     | 36      | 18        | 21.57                 | 0-2                       | 2        |
|      | 2605.0          | 40740   | 15              | 16-QAM     | 36      | 37        | 21.52                 | 0-2                       | 2        |
|      | 2605.0          | 40740   | 15              | 16-QAM     | 75      | 0         | 21.61                 | 0-2                       | 2        |
| High | 2647.5          | 41165   | 15              | QPSK       | 1       | 0         | 23.84                 | 0                         | 0        |
|      | 2647.5          | 41165   | 15              | QPSK       | 1       | 36        | 23.82                 | 0                         | 0        |
|      | 2647.5          | 41165   | 15              | QPSK       | 1       | 74        | 23.85                 | 0                         | 0        |
|      | 2647.5          | 41165   | 15              | QPSK       | 36      | 0         | 22.66                 | 0-1                       | 1        |
|      | 2647.5          | 41165   | 15              | QPSK       | 36      | 18        | 22.51                 | 0-1                       | 1        |
|      | 2647.5          | 41165   | 15              | QPSK       | 36      | 37        | 22.96                 | 0-1                       | 1        |
|      | 2647.5          | 41165   | 15              | QPSK       | 75      | 0         | 22.99                 | 0-1                       | 1        |
|      | 2647.5          | 41165   | 15              | 16-QAM     | 1       | 0         | 22.56                 | 0-1                       | 1        |
|      | 2647.5          | 41165   | 15              | 16-QAM     | 1       | 36        | 22.58                 | 0-1                       | 1        |
|      | 2647.5          | 41165   | 15              | 16-QAM     | 1       | 74        | 22.59                 | 0-1                       | 1        |
|      | 2647.5          | 41165   | 15              | 16-QAM     | 36      | 0         | 21.77                 | 0-2                       | 2        |
|      | 2647.5          | 41165   | 15              | 16-QAM     | 36      | 18        | 21.62                 | 0-2                       | 2        |
|      | 2647.5          | 41165   | 15              | 16-QAM     | 36      | 37        | 21.69                 | 0-2                       | 2        |
|      | 2647.5          | 41165   | 15              | 16-QAM     | 75      | 0         | 22.00                 | 0-2                       | 2        |

|                                          |                                                                                                                                   |                                      |                                                                                       |                                        |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMA8000                       |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                                                                         | <b>DUT Type:</b><br>Portable Handset | Page 24 of 47                                                                         |                                        |

**Table 9-3**  
**LTE Band 41 (Narrow Band) Maximum Conducted Powers – 10 MHz Bandwidth**

|          | Frequency [MHz] | Channel | Bandwidth [MHz] | Modulation | RB Size | RB Offset | Conducted Power [dBm] | MPR Allowed per 3GPP [dB] | MPR [dB] |
|----------|-----------------|---------|-----------------|------------|---------|-----------|-----------------------|---------------------------|----------|
| Low      | 2560.0          | 40290   | 10              | QPSK       | 1       | 0         | 23.85                 | 0                         | 0        |
|          | 2560.0          | 40290   | 10              | QPSK       | 1       | 25        | 23.72                 | 0                         | 0        |
|          | 2560.0          | 40290   | 10              | QPSK       | 1       | 49        | 23.78                 | 0                         | 0        |
|          | 2560.0          | 40290   | 10              | QPSK       | 25      | 0         | 22.75                 | 0-1                       | 1        |
|          | 2560.0          | 40290   | 10              | QPSK       | 25      | 12        | 22.76                 | 0-1                       | 1        |
|          | 2560.0          | 40290   | 10              | QPSK       | 25      | 25        | 22.74                 | 0-1                       | 1        |
|          | 2560.0          | 40290   | 10              | QPSK       | 50      | 0         | 22.76                 | 0-1                       | 1        |
|          | 2560.0          | 40290   | 10              | 16-QAM     | 1       | 0         | 22.91                 | 0-1                       | 1        |
|          | 2560.0          | 40290   | 10              | 16-QAM     | 1       | 25        | 22.80                 | 0-1                       | 1        |
|          | 2560.0          | 40290   | 10              | 16-QAM     | 1       | 49        | 23.10                 | 0-1                       | 1        |
|          | 2560.0          | 40290   | 10              | 16-QAM     | 25      | 0         | 21.78                 | 0-2                       | 2        |
|          | 2560.0          | 40290   | 10              | 16-QAM     | 25      | 12        | 21.73                 | 0-2                       | 2        |
|          | 2560.0          | 40290   | 10              | 16-QAM     | 25      | 25        | 21.82                 | 0-2                       | 2        |
|          | 2560.0          | 40290   | 10              | 16-QAM     | 50      | 0         | 21.79                 | 0-2                       | 2        |
| Low-Mid  | 2590.0          | 40590   | 10              | QPSK       | 1       | 0         | 23.76                 | 0                         | 0        |
|          | 2590.0          | 40590   | 10              | QPSK       | 1       | 25        | 23.65                 | 0                         | 0        |
|          | 2590.0          | 40590   | 10              | QPSK       | 1       | 49        | 23.76                 | 0                         | 0        |
|          | 2590.0          | 40590   | 10              | QPSK       | 25      | 0         | 22.71                 | 0-1                       | 1        |
|          | 2590.0          | 40590   | 10              | QPSK       | 25      | 12        | 22.60                 | 0-1                       | 1        |
|          | 2590.0          | 40590   | 10              | QPSK       | 25      | 25        | 22.66                 | 0-1                       | 1        |
|          | 2590.0          | 40590   | 10              | QPSK       | 50      | 0         | 22.64                 | 0-1                       | 1        |
|          | 2590.0          | 40590   | 10              | 16-QAM     | 1       | 0         | 22.62                 | 0-1                       | 1        |
|          | 2590.0          | 40590   | 10              | 16-QAM     | 1       | 25        | 22.54                 | 0-1                       | 1        |
|          | 2590.0          | 40590   | 10              | 16-QAM     | 1       | 49        | 22.65                 | 0-1                       | 1        |
|          | 2590.0          | 40590   | 10              | 16-QAM     | 25      | 0         | 21.75                 | 0-2                       | 2        |
|          | 2590.0          | 40590   | 10              | 16-QAM     | 25      | 12        | 21.67                 | 0-2                       | 2        |
|          | 2590.0          | 40590   | 10              | 16-QAM     | 25      | 25        | 21.85                 | 0-2                       | 2        |
|          | 2590.0          | 40590   | 10              | 16-QAM     | 50      | 0         | 21.59                 | 0-2                       | 2        |
| High-Mid | 2620.0          | 10890   | 10              | QPSK       | 1       | 0         | 23.76                 | 0                         | 0        |
|          | 2620.0          | 10890   | 10              | QPSK       | 1       | 25        | 23.71                 | 0                         | 0        |
|          | 2620.0          | 10890   | 10              | QPSK       | 1       | 49        | 23.74                 | 0                         | 0        |
|          | 2620.0          | 10890   | 10              | QPSK       | 25      | 0         | 22.78                 | 0-1                       | 1        |
|          | 2620.0          | 10890   | 10              | QPSK       | 25      | 12        | 22.68                 | 0-1                       | 1        |
|          | 2620.0          | 10890   | 10              | QPSK       | 25      | 25        | 22.75                 | 0-1                       | 1        |
|          | 2620.0          | 10890   | 10              | QPSK       | 50      | 0         | 22.66                 | 0-1                       | 1        |
|          | 2620.0          | 10890   | 10              | 16-QAM     | 1       | 0         | 22.62                 | 0-1                       | 1        |
|          | 2620.0          | 10890   | 10              | 16-QAM     | 1       | 25        | 22.56                 | 0-1                       | 1        |
|          | 2620.0          | 10890   | 10              | 16-QAM     | 1       | 49        | 22.74                 | 0-1                       | 1        |
|          | 2620.0          | 10890   | 10              | 16-QAM     | 25      | 0         | 21.66                 | 0-2                       | 2        |
|          | 2620.0          | 10890   | 10              | 16-QAM     | 25      | 12        | 21.64                 | 0-2                       | 2        |
|          | 2620.0          | 10890   | 10              | 16-QAM     | 25      | 25        | 21.63                 | 0-2                       | 2        |
|          | 2620.0          | 10890   | 10              | 16-QAM     | 50      | 0         | 21.58                 | 0-2                       | 2        |
| High     | 2650.0          | 41190   | 10              | QPSK       | 1       | 0         | 24.16                 | 0                         | 0        |
|          | 2650.0          | 41190   | 10              | QPSK       | 1       | 25        | 24.11                 | 0                         | 0        |
|          | 2650.0          | 41190   | 10              | QPSK       | 1       | 49        | 24.06                 | 0                         | 0        |
|          | 2650.0          | 41190   | 10              | QPSK       | 25      | 0         | 22.94                 | 0-1                       | 1        |
|          | 2650.0          | 41190   | 10              | QPSK       | 25      | 12        | 22.59                 | 0-1                       | 1        |
|          | 2650.0          | 41190   | 10              | QPSK       | 25      | 25        | 22.52                 | 0-1                       | 1        |
|          | 2650.0          | 41190   | 10              | QPSK       | 50      | 0         | 22.56                 | 0-1                       | 1        |
|          | 2650.0          | 41190   | 10              | 16-QAM     | 1       | 0         | 22.53                 | 0-1                       | 1        |
|          | 2650.0          | 41190   | 10              | 16-QAM     | 1       | 25        | 22.57                 | 0-1                       | 1        |
|          | 2650.0          | 41190   | 10              | 16-QAM     | 1       | 49        | 22.56                 | 0-1                       | 1        |
|          | 2650.0          | 41190   | 10              | 16-QAM     | 25      | 0         | 21.54                 | 0-2                       | 2        |
|          | 2650.0          | 41190   | 10              | 16-QAM     | 25      | 12        | 21.99                 | 0-2                       | 2        |
|          | 2650.0          | 41190   | 10              | 16-QAM     | 25      | 25        | 21.55                 | 0-2                       | 2        |
|          | 2650.0          | 41190   | 10              | 16-QAM     | 50      | 0         | 21.90                 | 0-2                       | 2        |

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset | Page 25 of 47                                                                         |                                 |

**Table 9-4**  
**LTE Band 41 (Narrow Band) Maximum Conducted Powers – 5 MHz Bandwidth**

|          | Frequency [MHz] | Channel | Bandwidth [MHz] | Modulation | RB Size | RB Offset | Conducted Power [dBm] | MPR Allowed per 3GPP [dB] | MPR [dB] |
|----------|-----------------|---------|-----------------|------------|---------|-----------|-----------------------|---------------------------|----------|
| Low      | 2557.5          | 40265   | 5               | QPSK       | 1       | 0         | 23.52                 | 0                         | 0        |
|          | 2557.5          | 40265   | 5               | QPSK       | 1       | 12        | 23.50                 | 0                         | 0        |
|          | 2557.5          | 40265   | 5               | QPSK       | 1       | 24        | 23.57                 | 0                         | 0        |
|          | 2557.5          | 40265   | 5               | QPSK       | 12      | 0         | 22.73                 | 0-1                       | 1        |
|          | 2557.5          | 40265   | 5               | QPSK       | 12      | 6         | 22.60                 | 0-1                       | 1        |
|          | 2557.5          | 40265   | 5               | QPSK       | 12      | 13        | 22.74                 | 0-1                       | 1        |
|          | 2557.5          | 40265   | 5               | QPSK       | 25      | 0         | 22.75                 | 0-1                       | 1        |
|          | 2557.5          | 40265   | 5               | 16-QAM     | 1       | 0         | 22.95                 | 0-1                       | 1        |
|          | 2557.5          | 40265   | 5               | 16-QAM     | 1       | 12        | 22.84                 | 0-1                       | 1        |
|          | 2557.5          | 40265   | 5               | 16-QAM     | 1       | 24        | 22.77                 | 0-1                       | 1        |
|          | 2557.5          | 40265   | 5               | 16-QAM     | 12      | 0         | 21.82                 | 0-2                       | 2        |
|          | 2557.5          | 40265   | 5               | 16-QAM     | 12      | 6         | 21.75                 | 0-2                       | 2        |
| Low-Mid  | 2589.2          | 40582   | 5               | QPSK       | 1       | 0         | 23.80                 | 0                         | 0        |
|          | 2589.2          | 40582   | 5               | QPSK       | 1       | 12        | 23.69                 | 0                         | 0        |
|          | 2589.2          | 40582   | 5               | QPSK       | 1       | 24        | 23.79                 | 0                         | 0        |
|          | 2589.2          | 40582   | 5               | QPSK       | 12      | 0         | 22.71                 | 0-1                       | 1        |
|          | 2589.2          | 40582   | 5               | QPSK       | 12      | 6         | 22.83                 | 0-1                       | 1        |
|          | 2589.2          | 40582   | 5               | QPSK       | 12      | 13        | 22.70                 | 0-1                       | 1        |
|          | 2589.2          | 40582   | 5               | QPSK       | 25      | 0         | 22.66                 | 0-1                       | 1        |
|          | 2589.2          | 40582   | 5               | 16-QAM     | 1       | 0         | 22.63                 | 0-1                       | 1        |
|          | 2589.2          | 40582   | 5               | 16-QAM     | 1       | 12        | 22.57                 | 0-1                       | 1        |
|          | 2589.2          | 40582   | 5               | 16-QAM     | 1       | 24        | 22.65                 | 0-1                       | 1        |
|          | 2589.2          | 40582   | 5               | 16-QAM     | 12      | 0         | 21.76                 | 0-2                       | 2        |
|          | 2589.2          | 40582   | 5               | 16-QAM     | 12      | 6         | 21.63                 | 0-2                       | 2        |
| High-Mid | 2620.8          | 40898   | 5               | QPSK       | 1       | 0         | 23.53                 | 0                         | 0        |
|          | 2620.8          | 40898   | 5               | QPSK       | 1       | 12        | 23.61                 | 0                         | 0        |
|          | 2620.8          | 40898   | 5               | QPSK       | 1       | 24        | 23.66                 | 0                         | 0        |
|          | 2620.8          | 40898   | 5               | QPSK       | 12      | 0         | 22.74                 | 0-1                       | 1        |
|          | 2620.8          | 40898   | 5               | QPSK       | 12      | 6         | 22.72                 | 0-1                       | 1        |
|          | 2620.8          | 40898   | 5               | QPSK       | 12      | 13        | 22.71                 | 0-1                       | 1        |
|          | 2620.8          | 40898   | 5               | QPSK       | 25      | 0         | 22.66                 | 0-1                       | 1        |
|          | 2620.8          | 40898   | 5               | 16-QAM     | 1       | 0         | 22.59                 | 0-1                       | 1        |
|          | 2620.8          | 40898   | 5               | 16-QAM     | 1       | 12        | 22.56                 | 0-1                       | 1        |
|          | 2620.8          | 40898   | 5               | 16-QAM     | 1       | 24        | 22.74                 | 0-1                       | 1        |
|          | 2620.8          | 40898   | 5               | 16-QAM     | 12      | 0         | 21.64                 | 0-2                       | 2        |
|          | 2620.8          | 40898   | 5               | 16-QAM     | 12      | 6         | 21.61                 | 0-2                       | 2        |
| High     | 2652.5          | 41215   | 5               | QPSK       | 1       | 0         | 23.66                 | 0                         | 0        |
|          | 2652.5          | 41215   | 5               | QPSK       | 1       | 12        | 23.86                 | 0                         | 0        |
|          | 2652.5          | 41215   | 5               | QPSK       | 1       | 24        | 23.77                 | 0                         | 0        |
|          | 2652.5          | 41215   | 5               | QPSK       | 12      | 0         | 22.76                 | 0-1                       | 1        |
|          | 2652.5          | 41215   | 5               | QPSK       | 12      | 6         | 22.56                 | 0-1                       | 1        |
|          | 2652.5          | 41215   | 5               | QPSK       | 12      | 13        | 22.55                 | 0-1                       | 1        |
|          | 2652.5          | 41215   | 5               | QPSK       | 25      | 0         | 22.59                 | 0-1                       | 1        |
|          | 2652.5          | 41215   | 5               | 16-QAM     | 1       | 0         | 22.53                 | 0-1                       | 1        |
|          | 2652.5          | 41215   | 5               | 16-QAM     | 1       | 12        | 22.55                 | 0-1                       | 1        |
|          | 2652.5          | 41215   | 5               | 16-QAM     | 1       | 24        | 22.53                 | 0-1                       | 1        |
|          | 2652.5          | 41215   | 5               | 16-QAM     | 12      | 0         | 21.53                 | 0-2                       | 2        |
|          | 2652.5          | 41215   | 5               | 16-QAM     | 12      | 6         | 21.75                 | 0-2                       | 2        |
| High     | 2652.5          | 41215   | 5               | 16-QAM     | 12      | 13        | 21.53                 | 0-2                       | 2        |
|          | 2652.5          | 41215   | 5               | 16-QAM     | 25      | 0         | 21.87                 | 0-2                       | 2        |

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset | Page 26 of 47                                                                         |                                 |

## 9.4 WLAN Conducted Powers

**Table 9-5**  
**IEEE 802.11b Average RF Power**

| 802.11b (2.4 GHz) Conducted Power [dBm] |       |         |           |
|-----------------------------------------|-------|---------|-----------|
| Mode                                    | Freq  | Channel | Data Rate |
|                                         | [MHz] |         | [Mbps]    |
|                                         |       |         | 1         |
| 802.11b                                 | 2412  | 1       | 16.49     |
| 802.11b                                 | 2437  | 6       | 17.28     |
| 802.11b                                 | 2462  | 11      | 17.01     |

**Table 9-6**  
**IEEE 802.11g Average RF Power**

| 802.11g (2.4 GHz) Conducted Power [dBm] |       |         |           |
|-----------------------------------------|-------|---------|-----------|
| Mode                                    | Freq  | Channel | Data Rate |
|                                         | [MHz] |         | [Mbps]    |
|                                         |       |         | 6         |
| 802.11g                                 | 2412  | 1       | 12.76     |
| 802.11g                                 | 2437  | 6       | 13.10     |
| 802.11g                                 | 2462  | 11      | 12.88     |


**Table 9-7**  
**IEEE 802.11n Average RF Power – 40 MHz Bandwidth**

| 40MHz BW 802.11n (5GHz) Conducted Power [dBm] |       |         |           |
|-----------------------------------------------|-------|---------|-----------|
| Mode                                          | Freq  | Channel | Data Rate |
|                                               | [MHz] |         | [Mbps]    |
|                                               |       |         | 13.5      |
| 802.11n                                       | 5190  | 38      | 10.51     |
| 802.11n                                       | 5230  | 46      | 11.05     |
| 802.11n                                       | 5270  | 54      | 11.29     |
| 802.11n                                       | 5310  | 62      | 10.72     |
| 802.11n                                       | 5510  | 102     | 11.41     |
| 802.11n                                       | 5550  | 110     | 10.61     |
| 802.11n                                       | 5670  | 134     | 10.90     |
| 802.11n                                       | 5755  | 151     | 11.30     |
| 802.11n                                       | 5795  | 159     | 10.75     |

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset |                                                                                       | Page 27 of 47                   |

Justification for test configurations for WLAN per KDB Publication 248227 D01 Wi-Fi SAR v02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.

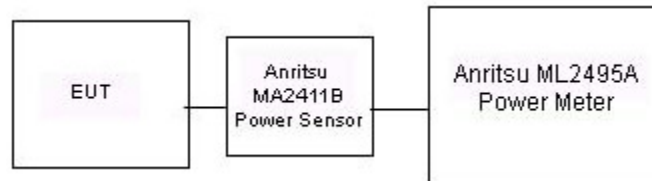

**Figure 9-3**  
**Power Measurement Setup for Bandwidths < 50 MHz**

|                                          |                                                                                                                                   |                                      |                                                                                       |                                        |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMA8000                       |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                                                                         | <b>DUT Type:</b><br>Portable Handset | Page 28 of 47                                                                         |                                        |

## 10 SYSTEM VERIFICATION

### 10.1 Tissue Verification

Table 10-1  
Measured Tissue Properties

| Calibrated for Tests Performed on: | Tissue Type | Tissue Temp During Calibration (C°) | Measured Frequency (MHz) | Measured Conductivity, $\sigma$ (S/m) | Measured Dielectric Constant, $\epsilon$ | TARGET Conductivity, $\sigma$ (S/m) | TARGET Dielectric Constant, $\epsilon$ | %dev $\sigma$ | %dev $\epsilon$ |
|------------------------------------|-------------|-------------------------------------|--------------------------|---------------------------------------|------------------------------------------|-------------------------------------|----------------------------------------|---------------|-----------------|
| 05/14/2015                         | 835H        | 21.3                                | 820                      | 0.897                                 | 42.783                                   | 0.899                               | 41.578                                 | -0.22%        | 2.90%           |
|                                    |             |                                     | 835                      | 0.912                                 | 42.602                                   | 0.900                               | 41.500                                 | 1.33%         | 2.66%           |
|                                    |             |                                     | 850                      | 0.923                                 | 42.445                                   | 0.916                               | 41.500                                 | 0.76%         | 2.28%           |
| 05/14/2015                         | 1900H       | 22.5                                | 1850                     | 1.363                                 | 38.878                                   | 1.400                               | 40.000                                 | -2.64%        | -2.81%          |
|                                    |             |                                     | 1880                     | 1.393                                 | 38.756                                   | 1.400                               | 40.000                                 | -0.50%        | -3.11%          |
|                                    |             |                                     | 1910                     | 1.429                                 | 38.661                                   | 1.400                               | 40.000                                 | 2.07%         | -3.35%          |
| 05/18/2015                         | 2450H-2600H | 20.9                                | 2401                     | 1.819                                 | 38.097                                   | 1.756                               | 39.287                                 | 3.59%         | -3.03%          |
|                                    |             |                                     | 2450                     | 1.876                                 | 37.925                                   | 1.800                               | 39.200                                 | 4.22%         | -3.25%          |
|                                    |             |                                     | 2499                     | 1.929                                 | 37.682                                   | 1.853                               | 39.138                                 | 4.10%         | -3.72%          |
|                                    |             |                                     | 2500                     | 1.932                                 | 37.680                                   | 1.855                               | 39.136                                 | 4.15%         | -3.72%          |
|                                    |             |                                     | 2550                     | 1.992                                 | 37.467                                   | 1.909                               | 39.073                                 | 4.35%         | -4.11%          |
|                                    |             |                                     | 2600                     | 2.049                                 | 37.249                                   | 1.964                               | 39.009                                 | 4.33%         | -4.51%          |
|                                    |             |                                     | 2650                     | 2.106                                 | 37.019                                   | 2.018                               | 38.945                                 | 4.36%         | -4.95%          |
|                                    |             |                                     | 5260                     | 4.587                                 | 36.384                                   | 4.717                               | 35.917                                 | -2.76%        | 1.30%           |
| 05/26/2015                         | 5200H-5800H | 22.3                                | 5280                     | 4.600                                 | 36.372                                   | 4.737                               | 35.894                                 | -2.89%        | 1.33%           |
|                                    |             |                                     | 5300                     | 4.610                                 | 36.319                                   | 4.758                               | 35.871                                 | -3.11%        | 1.25%           |
|                                    |             |                                     | 5500                     | 4.823                                 | 35.992                                   | 4.963                               | 35.643                                 | -2.82%        | 0.98%           |
|                                    |             |                                     | 5520                     | 4.833                                 | 36.006                                   | 4.983                               | 35.620                                 | -3.01%        | 1.08%           |
|                                    |             |                                     | 5745                     | 5.092                                 | 35.717                                   | 5.214                               | 35.363                                 | -2.34%        | 1.00%           |
|                                    |             |                                     | 5765                     | 5.117                                 | 35.684                                   | 5.234                               | 35.340                                 | -2.24%        | 0.97%           |
|                                    |             |                                     | 5800                     | 5.154                                 | 35.608                                   | 5.270                               | 35.300                                 | -2.20%        | 0.87%           |
|                                    |             |                                     | 820                      | 0.985                                 | 53.905                                   | 0.969                               | 55.258                                 | 1.65%         | -2.45%          |
| 05/20/2015                         | 835B        | 22.5                                | 835                      | 1.000                                 | 53.751                                   | 0.970                               | 55.200                                 | 3.09%         | -2.63%          |
|                                    |             |                                     | 850                      | 1.012                                 | 53.616                                   | 0.988                               | 55.154                                 | 2.43%         | -2.79%          |
|                                    |             |                                     | 820                      | 1.001                                 | 54.114                                   | 0.969                               | 55.258                                 | 3.30%         | -2.07%          |
| 05/26/2015                         | 835B        | 21.5                                | 835                      | 1.018                                 | 53.930                                   | 0.970                               | 55.200                                 | 4.95%         | -2.30%          |
|                                    |             |                                     | 850                      | 1.027                                 | 53.721                                   | 0.988                               | 55.154                                 | 3.95%         | -2.60%          |
|                                    |             |                                     | 1850                     | 1.505                                 | 51.325                                   | 1.520                               | 53.300                                 | -0.99%        | -3.71%          |
| 05/18/2015                         | 1900B       | 20.9                                | 1880                     | 1.543                                 | 51.271                                   | 1.520                               | 53.300                                 | 1.51%         | -3.81%          |
|                                    |             |                                     | 1910                     | 1.573                                 | 51.142                                   | 1.520                               | 53.300                                 | 3.49%         | -4.05%          |
|                                    |             |                                     | 1850                     | 1.489                                 | 51.252                                   | 1.520                               | 53.300                                 | -2.04%        | -3.84%          |
| 05/19/2015                         | 1900B       | 21.8                                | 1880                     | 1.520                                 | 51.142                                   | 1.520                               | 53.300                                 | 0.00%         | -4.05%          |
|                                    |             |                                     | 1910                     | 1.556                                 | 50.998                                   | 1.520                               | 53.300                                 | 2.37%         | -4.32%          |
|                                    |             |                                     | 2401                     | 1.920                                 | 51.142                                   | 1.903                               | 52.765                                 | 0.89%         | -3.08%          |
| 05/18/2015                         | 2450B       | 22.5                                | 2450                     | 1.993                                 | 51.007                                   | 1.950                               | 52.700                                 | 2.21%         | -3.21%          |
|                                    |             |                                     | 2499                     | 2.052                                 | 50.781                                   | 2.019                               | 52.638                                 | 1.63%         | -3.53%          |
|                                    |             |                                     | 2500                     | 2.036                                 | 51.097                                   | 2.021                               | 52.636                                 | 0.74%         | -2.92%          |
| 05/14/2015                         | 2600B       | 22.6                                | 2550                     | 2.105                                 | 50.877                                   | 2.092                               | 52.573                                 | 0.62%         | -3.23%          |
|                                    |             |                                     | 2600                     | 2.175                                 | 50.696                                   | 2.163                               | 52.509                                 | 0.55%         | -3.45%          |
|                                    |             |                                     | 2650                     | 2.244                                 | 50.490                                   | 2.234                               | 52.445                                 | 0.45%         | -3.73%          |
|                                    |             |                                     | 5260                     | 5.467                                 | 47.060                                   | 5.369                               | 48.933                                 | 1.83%         | -3.83%          |
| 05/18/2015                         | 5200B-5800B | 22.8                                | 5280                     | 5.494                                 | 47.064                                   | 5.393                               | 48.906                                 | 1.87%         | -3.77%          |
|                                    |             |                                     | 5300                     | 5.516                                 | 47.016                                   | 5.416                               | 48.879                                 | 1.85%         | -3.81%          |
|                                    |             |                                     | 5500                     | 5.764                                 | 46.669                                   | 5.650                               | 48.607                                 | 2.02%         | -3.99%          |
|                                    |             |                                     | 5520                     | 5.812                                 | 46.709                                   | 5.673                               | 48.580                                 | 2.45%         | -3.85%          |
|                                    |             |                                     | 5745                     | 6.100                                 | 46.286                                   | 5.936                               | 48.275                                 | 2.76%         | -4.12%          |
|                                    |             |                                     | 5765                     | 6.147                                 | 46.249                                   | 5.959                               | 48.248                                 | 3.15%         | -4.14%          |
|                                    |             |                                     | 5800                     | 6.196                                 | 46.241                                   | 6.000                               | 48.200                                 | 3.27%         | -4.06%          |

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset |                                                                                       | Page 29 of 47                   |

## 10.2 Test System Verification


Prior to SAR assessment, the system is verified to  $\pm 10\%$  of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

**Table 10-2**  
**1g System Verification Results**

| System Verification<br>TARGET & MEASURED |                        |             |            |                |                  |                 |           |          |                                   |                                     |                                         |                             |
|------------------------------------------|------------------------|-------------|------------|----------------|------------------|-----------------|-----------|----------|-----------------------------------|-------------------------------------|-----------------------------------------|-----------------------------|
| SAR System #                             | Tissue Frequency (MHz) | Tissue Type | Date:      | Amb. Temp (°C) | Liquid Temp (°C) | Input Power (W) | Dipole SN | Probe SN | Measured SAR <sub>1g</sub> (W/kg) | 1 W Target SAR <sub>1g</sub> (W/kg) | 1 W Normalized SAR <sub>1g</sub> (W/kg) | Deviation <sub>1g</sub> (%) |
| K                                        | 835                    | HEAD        | 05/14/2015 | 22.5           | 21.5             | 0.100           | 4d133     | 3288     | 0.978                             | 9.200                               | 9.780                                   | 6.30%                       |
| G                                        | 1900                   | HEAD        | 05/14/2015 | 22.7           | 21.8             | 0.100           | 5d149     | 3318     | 3.840                             | 40.200                              | 38.400                                  | -4.48%                      |
| G                                        | 2450                   | HEAD        | 05/18/2015 | 20.2           | 20.9             | 0.100           | 719       | 3318     | 4.930                             | 52.100                              | 49.300                                  | -5.37%                      |
| G                                        | 2600                   | HEAD        | 05/18/2015 | 22.3           | 20.9             | 0.100           | 1071      | 3318     | 5.480                             | 57.500                              | 54.800                                  | -4.70%                      |
| D                                        | 5300                   | HEAD        | 05/26/2015 | 21.7           | 21.3             | 0.050           | 1120      | 7357     | 4.150                             | 81.100                              | 83.000                                  | 2.34%                       |
| D                                        | 5500                   | HEAD        | 05/26/2015 | 21.1           | 21.3             | 0.050           | 1120      | 7357     | 4.230                             | 81.700                              | 84.600                                  | 3.55%                       |
| D                                        | 5800                   | HEAD        | 05/26/2015 | 22.5           | 21.3             | 0.050           | 1120      | 7357     | 3.980                             | 77.300                              | 79.600                                  | 2.98%                       |
| D                                        | 835                    | BODY        | 05/20/2015 | 21.1           | 22.0             | 0.100           | 4d132     | 3209     | 0.997                             | 9.140                               | 9.970                                   | 9.08%                       |
| G                                        | 835                    | BODY        | 05/26/2015 | 22.3           | 21.5             | 0.100           | 4d133     | 3318     | 0.878                             | 9.350                               | 8.780                                   | -6.10%                      |
| H                                        | 1900                   | BODY        | 05/18/2015 | 21.1           | 20.9             | 0.100           | 5d141     | 3258     | 3.870                             | 40.000                              | 38.700                                  | -3.25%                      |
| H                                        | 1900                   | BODY        | 05/19/2015 | 22.7           | 21.8             | 0.100           | 5d141     | 3258     | 3.870                             | 40.000                              | 38.700                                  | -3.25%                      |
| E                                        | 2450                   | BODY        | 05/18/2015 | 21.9           | 22.2             | 0.100           | 719       | 3332     | 5.030                             | 51.800                              | 50.300                                  | -2.90%                      |
| E                                        | 2600                   | BODY        | 05/14/2015 | 22.8           | 22.2             | 0.100           | 1071      | 3332     | 5.660                             | 56.900                              | 56.600                                  | -0.53%                      |
| A                                        | 5300                   | BODY        | 05/18/2015 | 24.3           | 22.8             | 0.050           | 1191      | 3914     | 4.210                             | 79.900                              | 84.200                                  | 5.38%                       |
| A                                        | 5500                   | BODY        | 05/18/2015 | 24.2           | 22.8             | 0.050           | 1191      | 3914     | 4.370                             | 83.100                              | 87.400                                  | 5.17%                       |
| A                                        | 5800                   | BODY        | 05/18/2015 | 24.2           | 22.8             | 0.050           | 1191      | 3914     | 3.970                             | 78.000                              | 79.400                                  | 1.79%                       |

**Table 10-3**  
**10-g System Verification Results**

| System Verification<br>TARGET & MEASURED |                        |             |            |                |                  |                 |           |          |                                    |                                      |                                          |                              |
|------------------------------------------|------------------------|-------------|------------|----------------|------------------|-----------------|-----------|----------|------------------------------------|--------------------------------------|------------------------------------------|------------------------------|
| SAR System #                             | Tissue Frequency (MHz) | Tissue Type | Date:      | Amb. Temp (°C) | Liquid Temp (°C) | Input Power (W) | Dipole SN | Probe SN | Measured SAR <sub>10g</sub> (W/kg) | 1 W Target SAR <sub>10g</sub> (W/kg) | 1 W Normalized SAR <sub>10g</sub> (W/kg) | Deviation <sub>10g</sub> (%) |
| A                                        | 5300                   | BODY        | 05/18/2015 | 24.3           | 22.8             | 0.050           | 1191      | 3920     | 1.160                              | 22.300                               | 23.200                                   | 4.04%                        |
| A                                        | 5500                   | BODY        | 05/18/2015 | 24.2           | 22.8             | 0.050           | 1191      | 3920     | 1.200                              | 23.000                               | 24.000                                   | 4.35%                        |

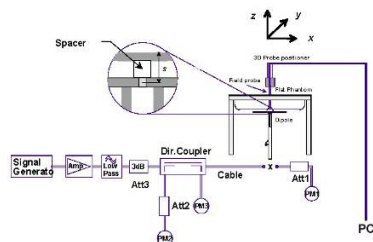

**Figure 10-1**  
**System Verification Setup Diagram**



**Figure 10-2**  
**System Verification Setup Photo**

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset |                                                                                       | Page 30 of 47                   |



# 11 SAR DATA SUMMARY

## 11.1 Standalone Head SAR Data

**Table 11-1**  
**GSM 850 Head SAR**

| MEASUREMENT RESULTS                                                                               |     |           |         |                             |                       |                  |                                                 |               |                      |            |          |                |                 |        |
|---------------------------------------------------------------------------------------------------|-----|-----------|---------|-----------------------------|-----------------------|------------------|-------------------------------------------------|---------------|----------------------|------------|----------|----------------|-----------------|--------|
| FREQUENCY                                                                                         |     | Mode/Band | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Side                                            | Test Position | Device Serial Number | Duty Cycle | SAR (1g) | Scaling Factor | Scaled SAR (1g) | Plot # |
| MHz                                                                                               | Ch. |           |         |                             |                       |                  |                                                 |               |                      |            | (W/kg)   |                | (W/kg)          |        |
| 836.60                                                                                            | 190 | GSM 850   | GSM     | 33.5                        | 33.34                 | 0.17             | Right                                           | Cheek         | 01ZKB                | 1:8.3      | 0.083    | 1.038          | 0.086           | A1     |
| 836.60                                                                                            | 190 | GSM 850   | GSM     | 33.5                        | 33.34                 | 0.09             | Right                                           | Tilt          | 01ZKB                | 1:8.3      | 0.029    | 1.038          | 0.030           |        |
| 836.60                                                                                            | 190 | GSM 850   | GSM     | 33.5                        | 33.34                 | -0.04            | Left                                            | Cheek         | 01ZKB                | 1:8.3      | 0.075    | 1.038          | 0.078           |        |
| 836.60                                                                                            | 190 | GSM 850   | GSM     | 33.5                        | 33.34                 | -0.15            | Left                                            | Tilt          | 01ZKB                | 1:8.3      | 0.028    | 1.038          | 0.029           |        |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |     |           |         |                             |                       |                  | Head<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |               |                      |            |          |                |                 |        |

**Table 11-2**  
**UMTS 850 Head SAR**

| MEASUREMENT RESULTS                                                                               |      |           |         |                             |                       |                  |                                                 |               |                      |            |          |                |                 |        |
|---------------------------------------------------------------------------------------------------|------|-----------|---------|-----------------------------|-----------------------|------------------|-------------------------------------------------|---------------|----------------------|------------|----------|----------------|-----------------|--------|
| FREQUENCY                                                                                         |      | Mode/Band | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Side                                            | Test Position | Device Serial Number | Duty Cycle | SAR (1g) | Scaling Factor | Scaled SAR (1g) | Plot # |
| MHz                                                                                               | Ch.  |           |         |                             |                       |                  |                                                 |               |                      |            | (W/kg)   |                | (W/kg)          |        |
| 836.60                                                                                            | 4183 | UMTS 850  | RMC     | 23.5                        | 22.76                 | 0.06             | Right                                           | Cheek         | 01YKW                | 1:1        | 0.080    | 1.186          | 0.095           | A2     |
| 836.60                                                                                            | 4183 | UMTS 850  | RMC     | 23.5                        | 22.76                 | 0.14             | Right                                           | Tilt          | 01YKW                | 1:1        | 0.029    | 1.186          | 0.034           |        |
| 836.60                                                                                            | 4183 | UMTS 850  | RMC     | 23.5                        | 22.76                 | 0.10             | Left                                            | Cheek         | 01YKW                | 1:1        | 0.067    | 1.186          | 0.079           |        |
| 836.60                                                                                            | 4183 | UMTS 850  | RMC     | 23.5                        | 22.76                 | -0.14            | Left                                            | Tilt          | 01YKW                | 1:1        | 0.028    | 1.186          | 0.033           |        |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |      |           |         |                             |                       |                  | Head<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |               |                      |            |          |                |                 |        |

**Table 11-3**  
**GSM 1900 Head SAR**

| MEASUREMENT RESULTS                                                                               |     |           |         |                             |                       |                  |                                                 |               |                      |            |          |                |                 |        |
|---------------------------------------------------------------------------------------------------|-----|-----------|---------|-----------------------------|-----------------------|------------------|-------------------------------------------------|---------------|----------------------|------------|----------|----------------|-----------------|--------|
| FREQUENCY                                                                                         |     | Mode/Band | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Side                                            | Test Position | Device Serial Number | Duty Cycle | SAR (1g) | Scaling Factor | Scaled SAR (1g) | Plot # |
| MHz                                                                                               | Ch. |           |         |                             |                       |                  |                                                 |               |                      |            | (W/kg)   |                | (W/kg)          |        |
| 1880.00                                                                                           | 661 | GSM 1900  | GSM     | 30.5                        | 29.90                 | 0.08             | Right                                           | Cheek         | 01ZKB                | 1:8.3      | 0.064    | 1.148          | 0.073           | A3     |
| 1880.00                                                                                           | 661 | GSM 1900  | GSM     | 30.5                        | 29.90                 | 0.03             | Right                                           | Tilt          | 01ZKB                | 1:8.3      | 0.036    | 1.148          | 0.041           |        |
| 1880.00                                                                                           | 661 | GSM 1900  | GSM     | 30.5                        | 29.90                 | -0.03            | Left                                            | Cheek         | 01ZKB                | 1:8.3      | 0.041    | 1.148          | 0.047           |        |
| 1880.00                                                                                           | 661 | GSM 1900  | GSM     | 30.5                        | 29.90                 | 0.14             | Left                                            | Tilt          | 01ZKB                | 1:8.3      | 0.023    | 1.148          | 0.026           |        |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |     |           |         |                             |                       |                  | Head<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |               |                      |            |          |                |                 |        |

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset |                                                                                       | Page 31 of 47                   |

**Table 11-4**  
**UMTS 1900 Head SAR**

| MEASUREMENT RESULTS                                                                               |      |           |         |                             |                       |                  |                                                 |               |                      |            |          |                |                 |        |
|---------------------------------------------------------------------------------------------------|------|-----------|---------|-----------------------------|-----------------------|------------------|-------------------------------------------------|---------------|----------------------|------------|----------|----------------|-----------------|--------|
| FREQUENCY                                                                                         |      | Mode/Band | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Side                                            | Test Position | Device Serial Number | Duty Cycle | SAR (1g) | Scaling Factor | Scaled SAR (1g) | Plot # |
| MHz                                                                                               | Ch.  |           |         |                             |                       |                  |                                                 |               |                      |            | (W/kg)   |                | (W/kg)          |        |
| 1880.00                                                                                           | 9400 | UMTS 1900 | RMC     | 23.0                        | 21.74                 | 0.16             | Right                                           | Cheek         | 01YKW                | 1:1        | 0.086    | 1.337          | 0.115           |        |
| 1880.00                                                                                           | 9400 | UMTS 1900 | RMC     | 23.0                        | 21.74                 | -0.08            | Right                                           | Tilt          | 01YKW                | 1:1        | 0.080    | 1.337          | 0.107           |        |
| 1880.00                                                                                           | 9400 | UMTS 1900 | RMC     | 23.0                        | 21.74                 | -0.01            | Left                                            | Cheek         | 01YKW                | 1:1        | 0.089    | 1.337          | 0.119           | A4     |
| 1880.00                                                                                           | 9400 | UMTS 1900 | RMC     | 23.0                        | 21.74                 | -0.10            | Left                                            | Tilt          | 01YKW                | 1:1        | 0.068    | 1.337          | 0.091           |        |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |      |           |         |                             |                       |                  | Head<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |               |                      |            |          |                |                 |        |

**Table 11-5**  
**LTE Band 41 Head SAR**

| MEASUREMENT RESULTS                                                                               |       |        |             |                 |                             |                       |                  |          |       |                                                 |            |         |           |                      |            |          |                |                 |        |
|---------------------------------------------------------------------------------------------------|-------|--------|-------------|-----------------|-----------------------------|-----------------------|------------------|----------|-------|-------------------------------------------------|------------|---------|-----------|----------------------|------------|----------|----------------|-----------------|--------|
| FREQUENCY                                                                                         |       |        | Mode        | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | MPR [dB] | Side  | Test Position                                   | Modulation | RB Size | RB Offset | Device Serial Number | Duty Cycle | SAR (1g) | Scaling Factor | Scaled SAR (1g) | Plot # |
| MHz                                                                                               | Ch.   | (W/kg) |             |                 |                             |                       |                  |          |       |                                                 |            |         |           |                      |            | (W/kg)   |                |                 |        |
| 2645.00                                                                                           | 41140 | High   | LTE Band 41 | 20              | 24.5                        | 24.12                 | -0.06            | 0        | Right | Cheek                                           | QPSK       | 1       | 0         | 01YKW                | 1:1.58     | 0.071    | 1.091          | 0.077           | A5     |
| 2645.00                                                                                           | 41140 | High   | LTE Band 41 | 20              | 23.5                        | 23.19                 | 0.10             | 1        | Right | Cheek                                           | QPSK       | 50      | 0         | 01YKW                | 1:1.58     | 0.057    | 1.074          | 0.061           |        |
| 2645.00                                                                                           | 41140 | High   | LTE Band 41 | 20              | 24.5                        | 24.12                 | -0.11            | 0        | Right | Tilt                                            | QPSK       | 1       | 0         | 01YKW                | 1:1.58     | 0.032    | 1.091          | 0.035           |        |
| 2645.00                                                                                           | 41140 | High   | LTE Band 41 | 20              | 23.5                        | 23.19                 | 0.12             | 1        | Right | Tilt                                            | QPSK       | 50      | 0         | 01YKW                | 1:1.58     | 0.027    | 1.074          | 0.029           |        |
| 2645.00                                                                                           | 41140 | High   | LTE Band 41 | 20              | 24.5                        | 24.12                 | -0.18            | 0        | Left  | Mouth-Jaw                                       | QPSK       | 1       | 0         | 01YKW                | 1:1.58     | 0.042    | 1.091          | 0.046           |        |
| 2645.00                                                                                           | 41140 | High   | LTE Band 41 | 20              | 23.5                        | 23.19                 | 0.10             | 1        | Left  | Mouth-Jaw                                       | QPSK       | 50      | 0         | 01YKW                | 1:1.58     | 0.036    | 1.074          | 0.039           |        |
| 2645.00                                                                                           | 41140 | High   | LTE Band 41 | 20              | 24.5                        | 24.12                 | -0.06            | 0        | Left  | Mouth-Jaw                                       | QPSK       | 1       | 0         | 01YKW                | 1:1.58     | 0.041    | 1.091          | 0.045           |        |
| 2645.00                                                                                           | 41140 | High   | LTE Band 41 | 20              | 23.5                        | 23.19                 | 0.06             | 1        | Left  | Mouth-Jaw                                       | QPSK       | 50      | 0         | 01YKW                | 1:1.58     | 0.029    | 1.074          | 0.031           |        |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |       |        |             |                 |                             |                       |                  |          |       | Head<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |            |         |           |                      |            |          |                |                 |        |

**Table 11-6**  
**DTS Head SAR**

| MEASUREMENT RESULTS                      |     |         |         |                 |                             |                       |                  |       |                      |                      |                  |                |                       |          |                        |                             |                 |        |
|------------------------------------------|-----|---------|---------|-----------------|-----------------------------|-----------------------|------------------|-------|----------------------|----------------------|------------------|----------------|-----------------------|----------|------------------------|-----------------------------|-----------------|--------|
| FREQUENCY                                |     | Mode    | Service | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Side  | Test Position        | Device Serial Number | Data Rate (Mbps) | Duty Cycle (%) | Peak SAR of Area Scan | SAR (1g) | Scaling Factor (Power) | Scaling Factor (Duty Cycle) | Scaled SAR (1g) | Plot # |
| MHz                                      | Ch. |         |         |                 |                             |                       |                  |       |                      |                      |                  |                | W/kg                  | (W/kg)   |                        | (W/kg)                      |                 |        |
| 2437                                     | 6   | 802.11b | DSSS    | 22              | 17.5                        | 17.28                 | 0.07             | Right | Cheek                | 01YKW                | 1                | 98.6           | 0.620                 | 0.539    | 1.052                  | 1.014                       | 0.575           | A6     |
| 2437                                     | 6   | 802.11b | DSSS    | 22              | 17.5                        | 17.28                 | -0.03            | Right | Tilt                 | 01YKW                | 1                | 98.6           | 0.458                 | 0.371    | 1.052                  | 1.014                       | 0.395           |        |
| 2437                                     | 6   | 802.11b | DSSS    | 22              | 17.5                        | 17.28                 | -                | Left  | Cheek                | 01YKW                | 1                | 98.6           | 0.389                 | -        | 1.052                  | 1.014                       | -               |        |
| 2437                                     | 6   | 802.11b | DSSS    | 22              | 17.5                        | 17.28                 | -                | Left  | Tilt                 | 01YKW                | 1                | 98.6           | 0.411                 | -        | 1.052                  | 1.014                       | -               |        |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT    |     |         |         |                 |                             |                       |                  |       | Head                 |                      |                  |                |                       |          |                        |                             |                 |        |
| Spatial Peak                             |     |         |         |                 |                             |                       |                  |       | 1.6 W/kg (mW/g)      |                      |                  |                |                       |          |                        |                             |                 |        |
| Uncontrolled Exposure/General Population |     |         |         |                 |                             |                       |                  |       | averaged over 1 gram |                      |                  |                |                       |          |                        |                             |                 |        |

|                                          |                                                                                                                                   |                                      |                                                                                       |                                        |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMA8000                       |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                                                                         | <b>DUT Type:</b><br>Portable Handset | Page 32 of 47                                                                         |                                        |

**Table 11-7  
NII Head SAR**

| MEASUREMENT RESULTS                      |     |         |         |                 |                             |                       |                  |       |                      |                      |                  |                |                       |          |                        |                             |                        |        |
|------------------------------------------|-----|---------|---------|-----------------|-----------------------------|-----------------------|------------------|-------|----------------------|----------------------|------------------|----------------|-----------------------|----------|------------------------|-----------------------------|------------------------|--------|
| FREQUENCY                                |     | Mode    | Service | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Side  | Test Position        | Device Serial Number | Data Rate (Mbps) | Duty Cycle (%) | Peak SAR of Area Scan | SAR (1g) | Scaling Factor (Power) | Scaling Factor (Duty Cycle) | Scaled SAR (1g) (W/kg) | Plot # |
| MHz                                      | Ch. |         |         |                 |                             |                       |                  |       |                      |                      |                  |                |                       | (W/kg)   |                        |                             |                        |        |
| 5270                                     | 54  | 802.11n | OFDM    | 40              | 11.5                        | 11.29                 | 0.01             | Right | Cheek                | 01YKW                | 13.5             | 98.5           | 1.050                 | 0.579    | 1.050                  | 1.015                       | 0.617                  |        |
| 5270                                     | 54  | 802.11n | OFDM    | 40              | 11.5                        | 11.29                 | -                | Right | Tilt                 | 01YKW                | 13.5             | 98.5           | 0.689                 | -        | 1.050                  | 1.015                       | -                      |        |
| 5270                                     | 54  | 802.11n | OFDM    | 40              | 11.5                        | 11.29                 | 0.21             | Left  | Cheek                | 01YKW                | 13.5             | 98.5           | 0.723                 | 0.228    | 1.050                  | 1.015                       | 0.243                  |        |
| 5270                                     | 54  | 802.11n | OFDM    | 40              | 11.5                        | 11.29                 | -                | Left  | Tilt                 | 01YKW                | 13.5             | 98.5           | 0.398                 | -        | 1.050                  | 1.015                       | -                      |        |
| 5510                                     | 102 | 802.11n | OFDM    | 40              | 11.5                        | 11.41                 | 0.16             | Right | Cheek                | 01YKW                | 13.5             | 98.5           | 1.392                 | 0.667    | 1.021                  | 1.015                       | 0.691                  | A7     |
| 5510                                     | 102 | 802.11n | OFDM    | 40              | 11.5                        | 11.41                 | 0.06             | Right | Tilt                 | 01YKW                | 13.5             | 98.5           | 0.714                 | 0.428    | 1.021                  | 1.015                       | 0.444                  |        |
| 5510                                     | 102 | 802.11n | OFDM    | 40              | 11.5                        | 11.41                 | -                | Left  | Cheek                | 01YKW                | 13.5             | 98.5           | 0.440                 | -        | 1.021                  | 1.015                       | -                      |        |
| 5510                                     | 102 | 802.11n | OFDM    | 40              | 11.5                        | 11.41                 | -                | Left  | Tilt                 | 01YKW                | 13.5             | 98.5           | 0.366                 | -        | 1.021                  | 1.015                       | -                      |        |
| 5755                                     | 151 | 802.11n | OFDM    | 40              | 11.5                        | 11.30                 | 0.13             | Right | Cheek                | 01YKW                | 13.5             | 98.5           | 0.886                 | 0.527    | 1.047                  | 1.015                       | 0.560                  |        |
| 5755                                     | 151 | 802.11n | OFDM    | 40              | 11.5                        | 11.30                 | 0.17             | Right | Tilt                 | 01YKW                | 13.5             | 98.5           | 1.171                 | 0.431    | 1.047                  | 1.015                       | 0.458                  |        |
| 5755                                     | 151 | 802.11n | OFDM    | 40              | 11.5                        | 11.30                 | -                | Left  | Cheek                | 01YKW                | 13.5             | 98.5           | 0.618                 | -        | 1.047                  | 1.015                       | -                      |        |
| 5755                                     | 151 | 802.11n | OFDM    | 40              | 11.5                        | 11.30                 | -                | Left  | Tilt                 | 01YKW                | 13.5             | 98.5           | 0.516                 | -        | 1.047                  | 1.015                       | -                      |        |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT    |     |         |         |                 |                             |                       |                  |       | Head                 |                      |                  |                |                       |          |                        |                             |                        |        |
| Spatial Peak                             |     |         |         |                 |                             |                       |                  |       | 1.6 W/kg (mW/g)      |                      |                  |                |                       |          |                        |                             |                        |        |
| Uncontrolled Exposure/General Population |     |         |         |                 |                             |                       |                  |       | averaged over 1 gram |                      |                  |                |                       |          |                        |                             |                        |        |

## 11.2 Standalone Body-Worn SAR Data

**Table 11-8  
GSM/UMTS Body-Worn SAR Data**

| MEASUREMENT RESULTS                                                                               |      |           |         |                             |                       |                  |                                                 |                      |                 |            |      |          |                |                 |        |
|---------------------------------------------------------------------------------------------------|------|-----------|---------|-----------------------------|-----------------------|------------------|-------------------------------------------------|----------------------|-----------------|------------|------|----------|----------------|-----------------|--------|
| FREQUENCY                                                                                         |      | Mode      | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Spacing                                         | Device Serial Number | # of Time Slots | Duty Cycle | Side | SAR (1g) | Scaling Factor | Scaled SAR (1g) | Plot # |
| MHz                                                                                               | Ch.  |           |         |                             |                       |                  |                                                 |                      |                 |            |      | (W/kg)   |                | (W/kg)          |        |
| 836.60                                                                                            | 190  | GSM 850   | GSM     | 33.5                        | 33.34                 | 0.02             | 10 mm                                           | 01ZKB                | 1               | 1:8.3      | back | 0.743    | 1.038          | 0.771           | A8     |
| 836.60                                                                                            | 4183 | UMTS 850  | RMC     | 23.5                        | 22.76                 | -0.02            | 15 mm                                           | 01YKW                | N/A             | 1:1        | back | 0.370    | 1.186          | 0.439           | A10    |
| 1850.20                                                                                           | 512  | GSM 1900  | GSM     | 30.5                        | 29.70                 | -0.04            | 10 mm                                           | 01ZKB                | 1               | 1:8.3      | back | 0.713    | 1.202          | 0.857           |        |
| 1880.00                                                                                           | 661  | GSM 1900  | GSM     | 30.5                        | 29.90                 | -0.01            | 10 mm                                           | 01ZKB                | 1               | 1:8.3      | back | 0.719    | 1.148          | 0.825           |        |
| 1909.80                                                                                           | 810  | GSM 1900  | GSM     | 30.5                        | 30.02                 | -0.01            | 10 mm                                           | 01ZKB                | 1               | 1:8.3      | back | 0.831    | 1.117          | 0.928           | A12    |
| 1909.80                                                                                           | 810  | GSM 1900  | GSM     | 30.5                        | 30.02                 | 0.00             | 10 mm                                           | 01ZKB                | 1               | 1:8.3      | back | 0.826    | 1.117          | 0.923           |        |
| 1880.00                                                                                           | 9400 | UMTS 1900 | RMC     | 23.0                        | 21.74                 | 0.09             | 15 mm                                           | 01YKW                | N/A             | 1:1        | back | 0.461    | 1.337          | 0.616           | A14    |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |      |           |         |                             |                       |                  | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |                      |                 |            |      |          |                |                 |        |

Note: Blue entry indicates variability measurement.

**Table 11-9  
LTE Band 41 Body-Worn SAR**

| MEASUREMENT RESULTS                                                                               |       |      |                 |                             |                       |                  |          |                      |                                                 |         |           |         |       |            |          |                |                 |        |     |
|---------------------------------------------------------------------------------------------------|-------|------|-----------------|-----------------------------|-----------------------|------------------|----------|----------------------|-------------------------------------------------|---------|-----------|---------|-------|------------|----------|----------------|-----------------|--------|-----|
| FREQUENCY                                                                                         |       | Mode | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | MPR [dB] | Device Serial Number | Modulation                                      | RB Size | RB Offset | Spacing | Side  | Duty Cycle | SAR (1g) | Scaling Factor | Scaled SAR (1g) | Plot # |     |
| MHz                                                                                               | Ch.   |      |                 |                             |                       |                  |          |                      |                                                 |         |           |         |       |            | (W/kg)   | (W/kg)         |                 |        |     |
| 2645.00                                                                                           | 41140 | High | LTE Band 41     | 20                          | 24.5                  | 24.12            | -0.13    | 0                    | 01YKW                                           | QPSK    | 1         | 0       | 10 mm | back       | 1:1.58   | 0.500          | 1.091           | 0.546  | A16 |
| 2645.00                                                                                           | 41140 | High | LTE Band 41     | 20                          | 23.5                  | 23.19            | 0.10     | 1                    | 01YKW                                           | QPSK    | 50        | 0       | 10 mm | back       | 1:1.58   | 0.417          | 1.074           | 0.448  |     |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |       |      |                 |                             |                       |                  |          |                      | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |         |           |         |       |            |          |                |                 |        |     |

**Table 11-10  
DTS Body-Worn SAR**

| MEASUREMENT RESULTS                                                                               |     |         |         |                 |                             |                       |                  |         |                                                 |                  |      |                |                       |          |                        |                             |                 |        |
|---------------------------------------------------------------------------------------------------|-----|---------|---------|-----------------|-----------------------------|-----------------------|------------------|---------|-------------------------------------------------|------------------|------|----------------|-----------------------|----------|------------------------|-----------------------------|-----------------|--------|
| FREQUENCY                                                                                         |     | Mode    | Service | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Spacing | Device Serial Number                            | Data Rate (Mbps) | Side | Duty Cycle (%) | Peak SAR of Area Scan | SAR (1g) | Scaling Factor (Power) | Scaling Factor (Duty Cycle) | Scaled SAR (1g) | Plot # |
| MHz                                                                                               | Ch. |         |         |                 |                             |                       |                  |         |                                                 |                  |      |                | W/kg                  | (W/kg)   | (W/kg)                 |                             |                 |        |
| 2437                                                                                              | 6   | 802.11b | DSSS    | 22              | 17.5                        | 17.28                 | 0.06             | 10 mm   | 01ZCY                                           | 1                | back | 98.6           | 0.093                 | 0.074    | 1.052                  | 1.014                       | 0.079           | A18    |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |     |         |         |                 |                             |                       |                  |         | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |                  |      |                |                       |          |                        |                             |                 |        |

|                                   |                                                                                     |                               |  |  |  |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|--|--|--|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  |  |  |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset |  |  |  | Page 33 of 47                                                                         |                                 |

**Table 11-11**  
**NII Body-Worn SAR**

| MEASUREMENT RESULTS                      |     |         |         |                 |                             |                       |                  |         |                      |                  |      |                |                       |          |                        |                             |                 |        |
|------------------------------------------|-----|---------|---------|-----------------|-----------------------------|-----------------------|------------------|---------|----------------------|------------------|------|----------------|-----------------------|----------|------------------------|-----------------------------|-----------------|--------|
| FREQUENCY                                |     | Mode    | Service | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Spacing | Device Serial Number | Data Rate (Mbps) | Side | Duty Cycle (%) | Peak SAR of Area Scan | SAR (1g) | Scaling Factor (Power) | Scaling Factor (Duty Cycle) | Scaled SAR (1g) | Plot # |
| MHz                                      | Ch. |         |         |                 |                             |                       |                  |         |                      |                  |      |                | W/kg                  | (W/kg)   |                        |                             | (W/kg)          |        |
| 5270                                     | 54  | 802.11n | OFDM    | 40              | 11.5                        | 11.29                 | 0.12             | 10 mm   | 01ZCY                | 13.5             | back | 98.5           | 0.131                 | 0.050    | 1.050                  | 1.015                       | 0.054           | A20    |
| 5510                                     | 102 | 802.11n | OFDM    | 40              | 11.5                        | 11.41                 | -0.14            | 10 mm   | 01ZCY                | 13.5             | back | 98.5           | 0.102                 | 0.036    | 1.021                  | 1.015                       | 0.038           |        |
| 5755                                     | 151 | 802.11n | OFDM    | 40              | 11.5                        | 11.30                 | 0.19             | 10 mm   | 01ZCY                | 13.5             | back | 98.5           | 0.036                 | 0.013    | 1.047                  | 1.015                       | 0.014           |        |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT    |     |         |         |                 |                             |                       |                  |         | Body                 |                  |      |                |                       |          |                        |                             |                 |        |
| Spatial Peak                             |     |         |         |                 |                             |                       |                  |         | 1.6 W/kg (mW/g)      |                  |      |                |                       |          |                        |                             |                 |        |
| Uncontrolled Exposure/General Population |     |         |         |                 |                             |                       |                  |         | averaged over 1 gram |                  |      |                |                       |          |                        |                             |                 |        |

## 11.3 Standalone Wireless Router SAR Data

**Table 11-12**  
**GPRS/UMTS Hotspot SAR Data**

| MEASUREMENT RESULTS                                                                               |      |           |         |                             |                       |                  |         |                      |                                                 |            |        |          |                |                 |        |
|---------------------------------------------------------------------------------------------------|------|-----------|---------|-----------------------------|-----------------------|------------------|---------|----------------------|-------------------------------------------------|------------|--------|----------|----------------|-----------------|--------|
| FREQUENCY                                                                                         |      | Mode      | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Spacing | Device Serial Number | # of GPRS Slots                                 | Duty Cycle | Side   | SAR (1g) | Scaling Factor | Scaled SAR (1g) | Plot # |
| MHz                                                                                               | Ch.  |           |         |                             |                       |                  |         |                      |                                                 |            |        | (W/kg)   |                | (W/kg)          |        |
| 824.20                                                                                            | 128  | GSM 850   | GPRS    | 28.5                        | 27.78                 | -0.02            | 10 mm   | 01ZKB                | 3                                               | 12.76      | back   | 0.922    | 1.180          | 1.088           |        |
| 836.60                                                                                            | 190  | GSM 850   | GPRS    | 28.5                        | 28.06                 | 0.04             | 10 mm   | 01ZKB                | 3                                               | 12.76      | back   | 0.991    | 1.107          | 1.097           | A9     |
| 848.80                                                                                            | 251  | GSM 850   | GPRS    | 28.5                        | 27.73                 | -0.06            | 10 mm   | 01ZKB                | 3                                               | 12.76      | back   | 0.828    | 1.194          | 0.989           |        |
| 824.20                                                                                            | 128  | GSM 850   | GPRS    | 28.5                        | 27.78                 | -0.02            | 10 mm   | 01ZKB                | 3                                               | 12.76      | front  | 0.867    | 1.180          | 1.023           |        |
| 836.60                                                                                            | 190  | GSM 850   | GPRS    | 28.5                        | 28.06                 | 0.13             | 10 mm   | 01ZKB                | 3                                               | 12.76      | front  | 0.803    | 1.107          | 0.889           |        |
| 848.80                                                                                            | 251  | GSM 850   | GPRS    | 28.5                        | 27.73                 | 0.00             | 10 mm   | 01ZKB                | 3                                               | 12.76      | front  | 0.729    | 1.194          | 0.870           |        |
| 836.60                                                                                            | 190  | GSM 850   | GPRS    | 28.5                        | 28.06                 | -0.03            | 10 mm   | 01ZKB                | 3                                               | 12.76      | bottom | 0.525    | 1.107          | 0.581           |        |
| 836.60                                                                                            | 190  | GSM 850   | GPRS    | 28.5                        | 28.06                 | -0.07            | 10 mm   | 01ZKB                | 3                                               | 12.76      | left   | 0.136    | 1.107          | 0.151           |        |
| 836.60                                                                                            | 190  | GSM 850   | GPRS    | 28.5                        | 28.06                 | -0.12            | 10 mm   | 01ZKB                | 3                                               | 12.76      | back   | 0.954    | 1.107          | 1.056           |        |
| 836.60                                                                                            | 4183 | UMTS 850  | RMC     | 20.5                        | 20.29                 | 0.17             | 10 mm   | 01Y3R                | N/A                                             | 1:1        | back   | 0.364    | 1.050          | 0.382           | A11    |
| 836.60                                                                                            | 4183 | UMTS 850  | RMC     | 20.5                        | 20.29                 | 0.01             | 10 mm   | 01Y3R                | N/A                                             | 1:1        | front  | 0.354    | 1.050          | 0.372           |        |
| 836.60                                                                                            | 4183 | UMTS 850  | RMC     | 20.5                        | 20.29                 | -0.05            | 10 mm   | 01Y3R                | N/A                                             | 1:1        | bottom | 0.181    | 1.050          | 0.190           |        |
| 836.60                                                                                            | 4183 | UMTS 850  | RMC     | 20.5                        | 20.29                 | -0.05            | 10 mm   | 01Y3R                | N/A                                             | 1:1        | left   | 0.046    | 1.050          | 0.048           |        |
| 1880.00                                                                                           | 661  | GSM 1900  | GPRS    | 25.0                        | 23.70                 | 0.06             | 10 mm   | 01ZKB                | 4                                               | 12.076     | back   | 0.548    | 1.349          | 0.739           |        |
| 1880.00                                                                                           | 661  | GSM 1900  | GPRS    | 25.0                        | 23.70                 | -0.03            | 10 mm   | 01ZKB                | 4                                               | 12.076     | front  | 0.548    | 1.349          | 0.739           |        |
| 1850.20                                                                                           | 512  | GSM 1900  | GPRS    | 25.0                        | 23.57                 | -0.02            | 10 mm   | 01ZKB                | 4                                               | 12.076     | bottom | 0.700    | 1.390          | 0.973           |        |
| 1880.00                                                                                           | 661  | GSM 1900  | GPRS    | 25.0                        | 23.70                 | 0.04             | 10 mm   | 01ZKB                | 4                                               | 12.076     | bottom | 0.713    | 1.349          | 0.962           |        |
| 1909.80                                                                                           | 810  | GSM 1900  | GPRS    | 25.0                        | 23.68                 | 0.02             | 10 mm   | 01ZKB                | 4                                               | 12.076     | bottom | 0.807    | 1.355          | 1.093           | A13    |
| 1880.00                                                                                           | 661  | GSM 1900  | GPRS    | 25.0                        | 23.70                 | -0.04            | 10 mm   | 01ZKB                | 4                                               | 12.076     | left   | 0.054    | 1.349          | 0.073           |        |
| 1880.00                                                                                           | 9400 | UMTS 1900 | RMC     | 20.5                        | 20.39                 | -0.04            | 10 mm   | 01YKW                | N/A                                             | 1:1        | back   | 0.528    | 1.026          | 0.542           |        |
| 1880.00                                                                                           | 9400 | UMTS 1900 | RMC     | 20.5                        | 20.39                 | -0.04            | 10 mm   | 01YKW                | N/A                                             | 1:1        | front  | 0.515    | 1.026          | 0.528           |        |
| 1880.00                                                                                           | 9400 | UMTS 1900 | RMC     | 20.5                        | 20.39                 | -0.10            | 10 mm   | 01YKW                | N/A                                             | 1:1        | bottom | 0.656    | 1.026          | 0.673           | A15    |
| 1880.00                                                                                           | 9400 | UMTS 1900 | RMC     | 20.5                        | 20.39                 | 0.09             | 10 mm   | 01YKW                | N/A                                             | 1:1        | left   | 0.036    | 1.026          | 0.037           |        |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population |      |           |         |                             |                       |                  |         |                      | Body<br>1.6 W/kg (mW/g)<br>averaged over 1 gram |            |        |          |                |                 |        |

Note: Blue entry indicates variability measurement.

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset |                                                                                       | Page 34 of 47                   |

**Table 11-13**  
**LTE Band 41 Hotspot SAR**

| MEASUREMENT RESULTS                      |       |      |                 |                             |                       |                  |          |                      |            |         |           |         |       |            |          |                |                 |        |     |
|------------------------------------------|-------|------|-----------------|-----------------------------|-----------------------|------------------|----------|----------------------|------------|---------|-----------|---------|-------|------------|----------|----------------|-----------------|--------|-----|
| FREQUENCY                                |       | Mode | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | MPR [dB] | Device Serial Number | Modulation | RB Size | RB Offset | Spacing | Side  | Duty Cycle | SAR (1g) | Scaling Factor | Scaled SAR (1g) | Plot # |     |
| MHz                                      | Ch.   |      |                 |                             |                       |                  |          |                      |            |         |           |         |       |            | (W/kg)   |                | (W/kg)          |        |     |
| 2645.00                                  | 41140 | High | LTE Band 41     | 20                          | 24.5                  | 24.12            | -0.13    | 0                    | 01YKW      | QPSK    | 1         | 0       | 10 mm | back       | 1:1.58   | 0.500          | 1.091           | 0.546  |     |
| 2645.00                                  | 41140 | High | LTE Band 41     | 20                          | 23.5                  | 23.19            | 0.10     | 1                    | 01YKW      | QPSK    | 50        | 0       | 10 mm | back       | 1:1.58   | 0.417          | 1.074           | 0.448  |     |
| 2645.00                                  | 41140 | High | LTE Band 41     | 20                          | 24.5                  | 24.12            | -0.15    | 0                    | 01YKW      | QPSK    | 1         | 0       | 10 mm | front      | 1:1.58   | 0.454          | 1.091           | 0.495  |     |
| 2645.00                                  | 41140 | High | LTE Band 41     | 20                          | 23.5                  | 23.19            | -0.05    | 1                    | 01YKW      | QPSK    | 50        | 0       | 10 mm | front      | 1:1.58   | 0.363          | 1.074           | 0.390  |     |
| 2645.00                                  | 41140 | High | LTE Band 41     | 20                          | 24.5                  | 24.12            | -0.06    | 0                    | 01YKW      | QPSK    | 1         | 0       | 10 mm | bottom     | 1:1.58   | 0.727          | 1.091           | 0.793  | A17 |
| 2645.00                                  | 41140 | High | LTE Band 41     | 20                          | 23.5                  | 23.19            | 0.01     | 1                    | 01YKW      | QPSK    | 50        | 0       | 10 mm | bottom     | 1:1.58   | 0.600          | 1.074           | 0.644  |     |
| 2645.00                                  | 41140 | High | LTE Band 41     | 20                          | 24.5                  | 24.12            | -0.13    | 0                    | 01YKW      | QPSK    | 1         | 0       | 10 mm | left       | 1:1.58   | 0.171          | 1.091           | 0.187  |     |
| 2645.00                                  | 41140 | High | LTE Band 41     | 20                          | 23.5                  | 23.19            | 0.09     | 1                    | 01YKW      | QPSK    | 50        | 0       | 10 mm | left       | 1:1.58   | 0.137          | 1.074           | 0.147  |     |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT    |       |      |                 |                             |                       |                  |          | Body                 |            |         |           |         |       |            |          |                |                 |        |     |
| Spatial Peak                             |       |      |                 |                             |                       |                  |          | 1.6 W/kg (mW/g)      |            |         |           |         |       |            |          |                |                 |        |     |
| Uncontrolled Exposure/General Population |       |      |                 |                             |                       |                  |          | averaged over 1 gram |            |         |           |         |       |            |          |                |                 |        |     |

**Table 11-14**  
**WLAN Hotspot SAR Data**

| MEASUREMENT RESULTS                      |     |         |         |                 |                             |                       |                  |         |                      |                  |       |                |                       |          |                        |                             |                 |        |
|------------------------------------------|-----|---------|---------|-----------------|-----------------------------|-----------------------|------------------|---------|----------------------|------------------|-------|----------------|-----------------------|----------|------------------------|-----------------------------|-----------------|--------|
| FREQUENCY                                |     | Mode    | Service | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Spacing | Device Serial Number | Data Rate (Mbps) | Side  | Duty Cycle (%) | Peak SAR of Area Scan | SAR (1g) | Scaling Factor (Power) | Scaling Factor (Duty Cycle) | Scaled SAR (1g) | Plot # |
| MHz                                      | Ch. |         |         |                 |                             |                       |                  |         |                      |                  |       |                | W/kg                  | (W/kg)   |                        |                             | (W/kg)          |        |
| 2437                                     | 6   | 802.11b | DSSS    | 22              | 17.5                        | 17.28                 | -                | 10 mm   | 01ZCY                | 1                | back  | 98.6           | 0.093                 | -        | 1.052                  | 1.014                       | -               |        |
| 2437                                     | 6   | 802.11b | DSSS    | 22              | 17.5                        | 17.28                 | 0.13             | 10 mm   | 01ZCY                | 1                | front | 98.6           | 0.106                 | 0.086    | 1.052                  | 1.014                       | 0.091           | A19    |
| 2437                                     | 6   | 802.11b | DSSS    | 22              | 17.5                        | 17.28                 | -                | 10 mm   | 01ZCY                | 1                | top   | 98.6           | 0.045                 | -        | 1.052                  | 1.014                       | -               |        |
| 2437                                     | 6   | 802.11b | DSSS    | 22              | 17.5                        | 17.28                 | -                | 10 mm   | 01ZCY                | 1                | left  | 98.6           | 0.038                 | -        | 1.052                  | 1.014                       | -               |        |
| 5755                                     | 151 | 802.11n | OFDM    | 40              | 11.5                        | 11.30                 | -                | 10 mm   | 01ZCY                | 13.5             | back  | 98.5           | 0.036                 | -        | 1.047                  | 1.015                       | -               |        |
| 5755                                     | 151 | 802.11n | OFDM    | 40              | 11.5                        | 11.30                 | 0.19             | 10 mm   | 01ZCY                | 13.5             | front | 98.5           | 0.060                 | 0.021    | 1.047                  | 1.015                       | 0.022           | A21    |
| 5755                                     | 151 | 802.11n | OFDM    | 40              | 11.5                        | 11.30                 | -                | 10 mm   | 01ZCY                | 13.5             | top   | 98.5           | 0.009                 | -        | 1.047                  | 1.015                       | -               |        |
| 5755                                     | 151 | 802.11n | OFDM    | 40              | 11.5                        | 11.30                 | -                | 10 mm   | 01ZCY                | 13.5             | left  | 98.5           | 0.004                 | -        | 1.047                  | 1.015                       | -               |        |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT    |     |         |         |                 |                             |                       |                  |         | Body                 |                  |       |                |                       |          |                        |                             |                 |        |
| Spatial Peak                             |     |         |         |                 |                             |                       |                  |         | 1.6 W/kg (mW/g)      |                  |       |                |                       |          |                        |                             |                 |        |
| Uncontrolled Exposure/General Population |     |         |         |                 |                             |                       |                  |         | averaged over 1 gram |                  |       |                |                       |          |                        |                             |                 |        |

## 11.4 Standalone Extremity SAR Data

**Table 11-15**  
**WLAN Extremity SAR Data**

| MEASUREMENT RESULTS                      |     |         |         |                 |                             |                       |                  |         |                        |                  |       |                |                       |           |                        |                             |                  |        |
|------------------------------------------|-----|---------|---------|-----------------|-----------------------------|-----------------------|------------------|---------|------------------------|------------------|-------|----------------|-----------------------|-----------|------------------------|-----------------------------|------------------|--------|
| FREQUENCY                                |     | Mode    | Service | Bandwidth [MHz] | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Spacing | Device Serial Number   | Data Rate (Mbps) | Side  | Duty Cycle (%) | Peak SAR of Area Scan | SAR (10g) | Scaling Factor (Power) | Scaling Factor (Duty Cycle) | Scaled SAR (10g) | Plot # |
| MHz                                      | Ch. |         |         |                 |                             |                       |                  |         |                        |                  |       |                | W/kg                  | (W/kg)    |                        |                             | (W/kg)           |        |
| 5270                                     | 54  | 802.11n | OFDM    | 40              | 11.5                        | 11.29                 | -                | 0 mm    | 01ZCY                  | 13.5             | back  | 98.5           | 1.442                 | -         | 1.050                  | 1.015                       | -                |        |
| 5270                                     | 54  | 802.11n | OFDM    | 40              | 11.5                        | 11.29                 | 0.02             | 0 mm    | 01ZCY                  | 13.5             | front | 98.5           | 2.332                 | 0.298     | 1.050                  | 1.015                       | 0.318            |        |
| 5270                                     | 54  | 802.11n | OFDM    | 40              | 11.5                        | 11.29                 | -                | 0 mm    | 01ZCY                  | 13.5             | top   | 98.5           | 0.691                 | -         | 1.050                  | 1.015                       | -                |        |
| 5270                                     | 54  | 802.11n | OFDM    | 40              | 11.5                        | 11.29                 | -                | 0 mm    | 01ZCY                  | 13.5             | left  | 98.5           | 0.560                 | -         | 1.050                  | 1.015                       | -                |        |
| 5510                                     | 102 | 802.11n | OFDM    | 40              | 11.5                        | 11.41                 | -                | 0 mm    | 01ZCY                  | 13.5             | back  | 98.5           | 1.953                 | -         | 1.021                  | 1.015                       | -                |        |
| 5510                                     | 102 | 802.11n | OFDM    | 40              | 11.5                        | 11.41                 | 0.18             | 0 mm    | 01ZCY                  | 13.5             | front | 98.5           | 2.427                 | 0.352     | 1.021                  | 1.015                       | 0.364            | A22    |
| 5510                                     | 102 | 802.11n | OFDM    | 40              | 11.5                        | 11.41                 | -                | 0 mm    | 01ZCY                  | 13.5             | top   | 98.5           | 0.732                 | -         | 1.021                  | 1.015                       | -                |        |
| 5510                                     | 102 | 802.11n | OFDM    | 40              | 11.5                        | 11.41                 | -                | 0 mm    | 01ZCY                  | 13.5             | left  | 98.5           | 0.496                 | -         | 1.021                  | 1.015                       | -                |        |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT    |     |         |         |                 |                             |                       |                  |         | Extremity              |                  |       |                |                       |           |                        |                             |                  |        |
| Spatial Peak                             |     |         |         |                 |                             |                       |                  |         | 4.0 W/kg (mW/g)        |                  |       |                |                       |           |                        |                             |                  |        |
| Uncontrolled Exposure/General Population |     |         |         |                 |                             |                       |                  |         | averaged over 10 grams |                  |       |                |                       |           |                        |                             |                  |        |

|                                          |                                                                                     |                                      |                                                                                       |                                        |
|------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMA8000                       |  | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                           | <b>DUT Type:</b><br>Portable Handset | Page 35 of 47                                                                         |                                        |

## 11.5 SAR Test Notes

### General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2003, and FCC KDB Publication 447498 D01v05.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v05.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance. A test separation distance of 10 mm for Body-worn SAR was used for GSM 850 MHz, GSM1900 MHz, LTE Band 41, and 2.4 GHz and 5 GHz WLAN as it is more conservative.
7. This device utilizes power reduction for UMTS B5/2 under portable hotspot conditions for SAR compliance. Therefore, these wireless router configurations were tested at reduced output power levels under portable hotspot conditions.
8. Per FCC KDB Publication 648474 D04v01, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was  $\leq 1.2$  W/kg, no additional body-worn SAR evaluations using a headset cable were required.
9. Per FCC KDB 865664 D01 v01, variability SAR tests were performed when the measured SAR results for a frequency band were greater than 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
10. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
11. Per FCC KDB Publication 648474 D04v01r01, this device is considered a "phablet" since the diagonal dimension is  $> 160$  mm and  $< 200$  mm. Therefore, hand SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR  $> 1.2$  W/kg when scaled to the maximum allowed output power tolerance.

### GSM Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D01v01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

### UMTS Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03. HSPA SAR was not required per 3G Test Reduction Procedures.

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset | Page 36 of 47                                                                         |                                 |

2. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

#### LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r03. The general test procedures used for testing can be found in Section 8.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. TDD LTE was tested per FCC KDB 941225 D05v02r03 and using the guidance provided in April 2013 TCB workshop notes. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.

#### WLAN Notes:

1. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01 Wi-Fi SAR v02for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.6.5 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01 Wi-Fi SAR v02for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg. See Section 8.6.6 for more information.
4. When the maximum reported 1g averaged SAR is  $\leq 0.8$  W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was  $\leq 1.20$  W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>OY1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset |                                                                                       | Page 37 of 47                   |



## 12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

### 12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v05r02 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

### 12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05 IV.C.1.iii and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is  $\leq 1.6$  W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

When standalone SAR is not required to be measured, per FCC KDB 447498 D01v05 4.3.2 2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

**Table 12-1**  
**Estimated SAR**

| Mode      | Frequency | Maximum Allowed Power | Separation Distance (Body) | Estimated SAR (Body) |
|-----------|-----------|-----------------------|----------------------------|----------------------|
|           | [MHz]     | [dBm]                 | [mm]                       | [W/kg]               |
| Bluetooth | 2480      | 12.00                 | 15                         | 0.224                |

Notes:

1. Held-to ear configurations are not applicable to Bluetooth operations and therefore were not considered for simultaneous transmission. Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.
2. Main antenna SAR testing was not required for extremity exposure conditions per FCC KDB 648474. Therefore, no further analysis was required to determine that possible simultaneous scenarios would not exceed the SAR limit.
3. The highest reported SAR for each exposure condition was used for SAR summation purpose.

|                                          |                                                                                                                                   |                                      |                                                                                       |                                        |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMA8000                       |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                                                                         | <b>DUT Type:</b><br>Portable Handset | Page 38 of 47                                                                         |                                        |

## 12.3 Head SAR Simultaneous Transmission Analysis

**Table 12-2**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)**

| Exposure Condition | Mode        | 2G/3G/4G SAR (W/kg) | 2.4 GHz WLAN SAR (W/kg) | Σ SAR (W/kg) |
|--------------------|-------------|---------------------|-------------------------|--------------|
| Head SAR           | GSM 850     | 0.086               | 0.575                   | 0.661        |
|                    | UMTS 850    | 0.095               | 0.575                   | 0.670        |
|                    | GSM 1900    | 0.073               | 0.575                   | 0.648        |
|                    | UMTS 1900   | 0.119               | 0.575                   | <b>0.694</b> |
|                    | LTE Band 41 | 0.077               | 0.575                   | 0.652        |

**Table 12-3**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)**

| Exposure Condition | Mode        | 2G/3G/4G SAR (W/kg) | 5 GHz WLAN SAR (W/kg) | Σ SAR (W/kg) |
|--------------------|-------------|---------------------|-----------------------|--------------|
| Head SAR           | GSM 850     | 0.086               | 0.691                 | 0.777        |
|                    | UMTS 850    | 0.095               | 0.691                 | 0.786        |
|                    | GSM 1900    | 0.073               | 0.691                 | 0.764        |
|                    | UMTS 1900   | 0.119               | 0.691                 | <b>0.810</b> |
|                    | LTE Band 41 | 0.077               | 0.691                 | 0.768        |

## 12.4 Body-Worn Simultaneous Transmission Analysis

For SAR summation for body-worn back side at 15mm, the SAR values at 10mm for some transmission modes were used since the 10mm test distance was more conservative. "<" denotes that the 10mm SAR values were used for summation purposes.

**Table 12-4**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.5 cm)**

| Exposure Condition | Mode        | 2G/3G/4G SAR (W/kg) | 2.4 GHz WLAN SAR (W/kg) | Σ SAR (W/kg)   |
|--------------------|-------------|---------------------|-------------------------|----------------|
| Body-Worn          | GSM 850     | < 0.771             | < 0.079                 | < 0.850        |
|                    | UMTS 850    | 0.439               | < 0.079                 | < 0.518        |
|                    | GSM 1900    | < 0.928             | < 0.079                 | < <b>1.007</b> |
|                    | UMTS 1900   | 0.616               | < 0.079                 | < 0.695        |
|                    | LTE Band 41 | < 0.546             | < 0.079                 | < 0.625        |

**Table 12-5**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.5 cm)**

| Exposure Condition | Mode        | 2G/3G/4G SAR (W/kg) | 5 GHz WLAN SAR (W/kg) | Σ SAR (W/kg)   |
|--------------------|-------------|---------------------|-----------------------|----------------|
| Body-Worn          | GSM 850     | < 0.771             | < 0.054               | < 0.825        |
|                    | UMTS 850    | 0.439               | < 0.054               | < 0.493        |
|                    | GSM 1900    | < 0.928             | < 0.054               | < <b>0.982</b> |
|                    | UMTS 1900   | 0.616               | < 0.054               | < 0.670        |
|                    | LTE Band 41 | < 0.546             | < 0.054               | < 0.600        |

|                                          |                                                                                     |                                      |                                                                                       |                                        |
|------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMA8000                       |  | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                           | <b>DUT Type:</b><br>Portable Handset | Page 39 of 47                                                                         |                                        |

**Table 12-6**  
**Simultaneous Transmission Scenario with 2.4 GHz Bluetooth (Body-Worn at 1.5 cm)**

| Exposure Condition | Mode        | 2G/3G/4G SAR (W/kg) | Bluetooth SAR (W/kg) | $\Sigma$ SAR (W/kg) |
|--------------------|-------------|---------------------|----------------------|---------------------|
| Body-Worn          | GSM 850     | < 0.771             | 0.224                | < 0.995             |
|                    | UMTS 850    | 0.439               | 0.224                | 0.663               |
|                    | GSM 1900    | < 0.928             | 0.224                | < <b>1.152</b>      |
|                    | UMTS 1900   | 0.616               | 0.224                | 0.840               |
|                    | LTE Band 41 | < 0.546             | 0.224                | < 0.770             |

Note: Bluetooth SAR was not required to be measured per FCC KDB 447498. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

## 12.5 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

**Table 12-7**  
**Simultaneous Transmission Scenario (2.4 GHz Hotspot at 1.0 cm)**

| Exposure Condition | Mode        | 3G/4G SAR (W/kg) | 2.4 GHz WLAN SAR (W/kg) | $\Sigma$ SAR (W/kg) |
|--------------------|-------------|------------------|-------------------------|---------------------|
| Hotspot SAR        | GPRS 850    | 1.097            | 0.091                   | <b>1.188</b>        |
|                    | UMTS 850    | 0.382            | 0.091                   | 0.473               |
|                    | GPRS 1900   | 1.093            | 0.091                   | 1.184               |
|                    | UMTS 1900   | 0.673            | 0.091                   | 0.764               |
|                    | LTE Band 41 | 0.793            | 0.091                   | 0.884               |

**Table 12-8**  
**Simultaneous Transmission Scenario (5.8 GHz Hotspot at 1.0 cm)**

| Exposure Condition | Mode        | 3G/4G SAR (W/kg) | 5 GHz WLAN SAR (W/kg) | $\Sigma$ SAR (W/kg) |
|--------------------|-------------|------------------|-----------------------|---------------------|
| Hotspot SAR        | GPRS 850    | 1.097            | 0.022                 | <b>1.119</b>        |
|                    | UMTS 850    | 0.382            | 0.022                 | 0.404               |
|                    | GPRS 1900   | 1.093            | 0.022                 | 1.115               |
|                    | UMTS 1900   | 0.673            | 0.022                 | 0.695               |
|                    | LTE Band 41 | 0.793            | 0.022                 | 0.815               |

## 12.6 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v05 and IEEE 1528-2013 Section 6.3.4.1.2.

|                                          |                                                                                                                                   |                                      |                                                                                       |                                        |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMA8000                       |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                                                                         | <b>DUT Type:</b><br>Portable Handset | Page 40 of 47                                                                         |                                        |

## 13 SAR MEASUREMENT VARIABILITY

### 13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
- 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

**Table 13-1**  
**Body SAR Measurement Variability Results**

| BODY VARIABILITY RESULTS                 |           |     |          |         |                 |      |                      |                   |                       |       |                       |       |                       |       |
|------------------------------------------|-----------|-----|----------|---------|-----------------|------|----------------------|-------------------|-----------------------|-------|-----------------------|-------|-----------------------|-------|
| Band                                     | FREQUENCY |     | Mode     | Service | # of Time Slots | Side | Spacing              | Measured SAR (1g) | 1st Repeated SAR (1g) | Ratio | 2nd Repeated SAR (1g) | Ratio | 3rd Repeated SAR (1g) | Ratio |
|                                          | MHz       | Ch. |          |         |                 |      |                      | (W/kg)            | (W/kg)                |       | (W/kg)                |       | (W/kg)                |       |
| 835                                      | 836.60    | 190 | GSM 850  | GPRS    | 3               | back | 10 mm                | 0.991             | 0.954                 | 1.04  | N/A                   | N/A   | N/A                   | N/A   |
| 1900                                     | 1909.80   | 810 | GSM 1900 | GSM     | 1               | back | 10 mm                | 0.831             | 0.826                 | 1.01  | N/A                   | N/A   | N/A                   | N/A   |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT    |           |     |          |         |                 |      | Body                 |                   |                       |       |                       |       |                       |       |
| Spatial Peak                             |           |     |          |         |                 |      | 1.6 W/kg (mW/g)      |                   |                       |       |                       |       |                       |       |
| Uncontrolled Exposure/General Population |           |     |          |         |                 |      | averaged over 1 gram |                   |                       |       |                       |       |                       |       |

### 13.2 Measurement Uncertainty

The measured SAR was  $< 1.5$  W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01, the extended measurement uncertainty analysis per IEEE 1528-2003 was not required.

|                                   |                                                                                                                                   |                               |                                                                                       |                                 |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                                                                | DUT Type:<br>Portable Handset |                                                                                       | Page 41 of 47                   |

# 14 EQUIPMENT LIST

| Manufacturer       | Model      | Description                                   | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|--------------------|------------|-----------------------------------------------|------------|--------------|------------|---------------|
| Agilent            | 8594A      | (9kHz-2.9GHz) Spectrum Analyzer               | N/A        | N/A          | N/A        | 3051A00187    |
| Agilent            | 8648D      | (9kHz-4GHz) Signal Generator                  | 3/15/2015  | Annual       | 3/15/2016  | 3629U00687    |
| Agilent            | 8753E      | (30kHz-6GHz) Network Analyzer                 | 12/30/2014 | Annual       | 12/30/2015 | JP38020182    |
| Agilent            | 8753ES     | S-Parameter Network Analyzer                  | 3/12/2015  | Annual       | 3/12/2016  | MY40000670    |
| Agilent            | 8753ES     | Network Analyzer                              | 3/20/2015  | Annual       | 3/20/2016  | MY40001472    |
| Agilent            | E4432B     | ESG-D Series Signal Generator                 | 3/16/2015  | Annual       | 3/16/2016  | US40053896    |
| Agilent            | E4438C     | ESG Vector Signal Generator                   | 3/13/2015  | Annual       | 3/13/2016  | MY42082385    |
| Agilent            | E8257D     | (250kHz-20GHz) Signal Generator               | 3/15/2015  | Annual       | 3/15/2016  | MY45470194    |
| Agilent            | N4010A     | Wireless Connectivity Test Set                | CBT        | N/A          | CBT        | GB44450273    |
| Agilent            | N4010A     | Wireless Connectivity Test Set                | CBT        | N/A          | CBT        | GB46170464    |
| Agilent            | N5182A     | MXG Vector Signal Generator                   | 10/27/2014 | Annual       | 10/27/2015 | MY47420603    |
| Amplifier Research | 15S1G6     | Amplifier                                     | CBT        | N/A          | CBT        | 433971        |
| Amplifier Research | 15S1G6     | Amplifier                                     | CBT        | N/A          | CBT        | 433972        |
| Amplifier Research | 15S1G6     | Amplifier                                     | CBT        | N/A          | CBT        | 433974        |
| Anritsu            | MA24106A   | USB Power Sensor                              | 3/2/2015   | Annual       | 3/2/2016   | 1344545       |
| Anritsu            | MA24106A   | USB Power Sensor                              | 3/11/2015  | Annual       | 3/11/2016  | 1344554       |
| Anritsu            | MA2411B    | Pulse Power Sensor                            | 11/17/2014 | Annual       | 11/17/2015 | 1126066       |
| Anritsu            | MA2411B    | Pulse Power Sensor                            | 11/17/2014 | Annual       | 11/17/2015 | 1207364       |
| Anritsu            | MA2481A    | Power Sensor                                  | 3/10/2015  | Annual       | 3/10/2016  | 2400          |
| Anritsu            | MA2481A    | Power Sensor                                  | 3/11/2015  | Annual       | 3/11/2016  | 5318          |
| Anritsu            | ML2495A    | Power Meter                                   | 10/31/2013 | Biennial     | 10/31/2015 | 941001        |
| Anritsu            | ML2495A    | Power Meter                                   | 10/31/2013 | Biennial     | 10/31/2015 | 1039008       |
| Anritsu            | ML2438A    | Power Meter                                   | 3/13/2015  | Annual       | 3/13/2016  | 1190013       |
| Anritsu            | ML2496A    | Power Meter                                   | 3/13/2015  | Annual       | 3/13/2016  | 1306009       |
| Anritsu            | ML2496A    | Power Meter                                   | 3/13/2015  | Annual       | 3/13/2016  | 1351001       |
| Anritsu            | MT8820C    | Radio Communication Analyzer                  | 3/10/2015  | Annual       | 3/10/2016  | 6200901190    |
| Anritsu            | MT8820C    | Radio Communication Analyzer                  | 9/19/2014  | Annual       | 9/19/2015  | 6201144418    |
| COMTech            | AR85729-5  | Solid State Amplifier                         | CBT        | N/A          | CBT        | M155A00-009   |
| Control Company    | 4040       | Digital Thermometer                           | 3/18/2015  | Biennial     | 3/18/2017  | 150194895     |
| Control Company    | 4353       | Long Stem Thermometer                         | 3/5/2015   | Biennial     | 3/5/2017   | 150149534     |
| Control Company    | 36934-158  | Wall-Mounted Thermometer                      | 4/29/2014  | Biennial     | 4/29/2016  | 122014488     |
| Fisher Scientific  | 15-077-960 | Digital Thermometer                           | 12/4/2013  | Biennial     | 12/4/2015  | 130764551     |
| Fisher Scientific  | 5407993    | Long Stem Thermometer                         | 11/4/2013  | Biennial     | 11/4/2015  | 130671801     |
| Gigatronix         | 80701A     | (0.05-18GHz) Power Sensor                     | 10/30/2014 | Annual       | 10/30/2015 | 1833460       |
| Gigatronix         | 8651A      | Universal Power Meter                         | 10/30/2014 | Annual       | 10/30/2015 | 8650319       |
| MCL                | BW-N6W5+   | 6dB Attenuator                                | CBT        | N/A          | CBT        | 1139          |
| MiniCircuits       | SLP-2400+  | Low Pass Filter                               | CBT        | N/A          | CBT        | R8979500903   |
| MiniCircuits       | VLF-6000+  | Low Pass Filter                               | CBT        | N/A          | CBT        | N/A           |
| Mini-Circuits      | BW-N20W5   | Power Attenuator                              | CBT        | N/A          | CBT        | 1226          |
| Mini-Circuits      | BW-N20W5+  | DC to 18 GHz Precision Fixed 20 dB Attenuator | CBT        | N/A          | CBT        | N/A           |
| Mini-Circuits      | NLP-1200+  | Low Pass Filter DC to 1000 MHz                | CBT        | N/A          | CBT        | N/A           |
| Mini-Circuits      | NLP-2950+  | Low Pass Filter DC to 2700 MHz                | CBT        | N/A          | CBT        | N/A           |
| Mitutoyo           | CD-6°CSX   | Digital Caliper                               | 5/8/2014   | Biennial     | 5/8/2016   | 13264162      |
| Narda              | 4014C-6    | 4 - 8 GHz SMA 6 dB Directional Coupler        | CBT        | N/A          | CBT        | N/A           |
| Narda              | 4772-3     | Attenuator (3dB)                              | CBT        | N/A          | CBT        | 9406          |
| Narda              | BW-S3W2    | Attenuator (3dB)                              | CBT        | N/A          | CBT        | 120           |
| Pasternack         | PE2208-6   | Bidirectional Coupler                         | CBT        | N/A          | CBT        | N/A           |
| Pasternack         | PE2209-10  | Bidirectional Coupler                         | CBT        | N/A          | CBT        | N/A           |
| Rohde & Schwarz    | CMU200     | Base Station Simulator                        | 6/6/2014   | Annual       | 6/6/2015   | 109892        |
| Rohde & Schwarz    | CMU200     | Base Station Simulator                        | 12/4/2014  | Annual       | 12/4/2015  | 833855/0010   |
| Rohde & Schwarz    | CMU200     | Base Station Simulator                        | 3/23/2015  | Annual       | 3/23/2016  | 836371/0079   |
| Rohde & Schwarz    | CMW500     | Radio Communication Tester                    | 10/3/2014  | Annual       | 10/3/2015  | 100976        |
| Rohde & Schwarz    | CMW500     | Radio Communication Tester                    | 4/22/2015  | Annual       | 4/22/2016  | 101699        |
| Seekonk            | NC-100     | Torque Wrench                                 | 3/18/2014  | Biennial     | 3/18/2016  | 22313         |
| Seekonk            | NC-100     | Torque Wrench                                 | CBT        | N/A          | CBT        | N/A           |
| SPEAG              | D835V2     | 835 MHz SAR Dipole                            | 1/16/2015  | Annual       | 1/16/2016  | 4d132         |
| SPEAG              | D835V2     | 835 MHz SAR Dipole                            | 7/24/2014  | Annual       | 7/24/2015  | 4d133         |
| SPEAG              | D1900V2    | 1900 MHz SAR Dipole                           | 4/14/2015  | Annual       | 4/14/2016  | 5d141         |
| SPEAG              | D1900V2    | 1900 MHz SAR Dipole                           | 7/23/2014  | Annual       | 7/23/2015  | 5d149         |
| SPEAG              | D2450V2    | 2450 MHz SAR Dipole                           | 8/11/2014  | Annual       | 8/11/2015  | 719           |
| SPEAG              | D2600V2    | 2600 MHz SAR Dipole                           | 10/20/2014 | Annual       | 10/20/2015 | 1071          |
| SPEAG              | D5GHZV2    | 5 GHz SAR Dipole                              | 2/17/2015  | Annual       | 2/17/2016  | 1120          |
| SPEAG              | D5GHZV2    | 5 GHz SAR Dipole                              | 9/25/2014  | Annual       | 9/25/2015  | 1191          |
| SPEAG              | DAE4       | Dasy Data Acquisition Electronics             | 2/18/2015  | Annual       | 2/18/2016  | 665           |
| SPEAG              | DAE4       | Dasy Data Acquisition Electronics             | 1/14/2015  | Annual       | 1/14/2016  | 1272          |
| SPEAG              | DAE4       | Dasy Data Acquisition Electronics             | 9/17/2014  | Annual       | 9/17/2015  | 1323          |
| SPEAG              | DAE4       | Dasy Data Acquisition Electronics             | 10/31/2014 | Annual       | 10/31/2015 | 1333          |
| SPEAG              | DAE4       | Dasy Data Acquisition Electronics             | 3/13/2015  | Annual       | 3/13/2016  | 1334          |
| SPEAG              | DAE4       | Dasy Data Acquisition Electronics             | 9/18/2014  | Annual       | 9/18/2015  | 1364          |
| SPEAG              | DAK-3.5    | Dielectric Assessment Kit                     | 10/21/2014 | Annual       | 10/21/2015 | 1091          |
| SPEAG              | DAKS-3.5   | Portable Dielectric Assessment Kit            | 7/15/2014  | Annual       | 7/15/2015  | 1039          |
| SPEAG              | ES3DV3     | SAR Probe                                     | 3/19/2015  | Annual       | 3/19/2016  | 3209          |
| SPEAG              | ES3DV3     | SAR Probe                                     | 2/27/2015  | Annual       | 2/27/2016  | 3258          |
| SPEAG              | ES3DV3     | SAR Probe                                     | 9/24/2014  | Annual       | 9/24/2015  | 3288          |
| SPEAG              | ES3DV3     | SAR Probe                                     | 1/23/2015  | Annual       | 1/23/2016  | 3318          |
| SPEAG              | ES3DV3     | SAR Probe                                     | 9/18/2014  | Annual       | 9/18/2015  | 3332          |
| SPEAG              | EX3DV4     | SAR Probe                                     | 2/10/2015  | Annual       | 2/10/2016  | 3914          |
| SPEAG              | EX3DV4     | SAR Probe                                     | 4/23/2015  | Annual       | 4/23/2016  | 7357          |
| VWR                | 36934-158  | Wall-Mounted Thermometer                      | 4/29/2014  | Biennial     | 4/29/2016  | 111859323     |

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset |                                                                                       | Page 42 of 47                   |

## 15 MEASUREMENT UNCERTAINTIES

Applicable for frequencies less than 3000 MHz.

| a                                                                                | b                    | c             | d              | e=<br>f(d,k) | f                     | g                        | h =<br>c x f/e                 | i =<br>c x g/e                   | k              |
|----------------------------------------------------------------------------------|----------------------|---------------|----------------|--------------|-----------------------|--------------------------|--------------------------------|----------------------------------|----------------|
| Uncertainty<br>Component                                                         | IEEE<br>1528<br>Sec. | Tol.<br>(± %) | Prob.<br>Dist. | Div.         | c <sub>i</sub><br>1gm | c <sub>i</sub><br>10 gms | 1gm<br>u <sub>i</sub><br>(± %) | 10gms<br>u <sub>i</sub><br>(± %) | v <sub>i</sub> |
| <b>Measurement System</b>                                                        |                      |               |                |              |                       |                          |                                |                                  |                |
| Probe Calibration                                                                | E.2.1                | 6.0           | N              | 1            | 1.0                   | 1.0                      | 6.0                            | 6.0                              | ∞              |
| Axial Isotropy                                                                   | E.2.2                | 0.25          | N              | 1            | 0.7                   | 0.7                      | 0.2                            | 0.2                              | ∞              |
| Hemishperical Isotropy                                                           | E.2.2                | 1.3           | N              | 1            | 1.0                   | 1.0                      | 1.3                            | 1.3                              | ∞              |
| Boundary Effect                                                                  | E.2.3                | 0.4           | N              | 1            | 1.0                   | 1.0                      | 0.4                            | 0.4                              | ∞              |
| Linearity                                                                        | E.2.4                | 0.3           | N              | 1            | 1.0                   | 1.0                      | 0.3                            | 0.3                              | ∞              |
| System Detection Limits                                                          | E.2.5                | 5.1           | N              | 1            | 1.0                   | 1.0                      | 5.1                            | 5.1                              | ∞              |
| Readout Electronics                                                              | E.2.6                | 1.0           | N              | 1            | 1.0                   | 1.0                      | 1.0                            | 1.0                              | ∞              |
| Response Time                                                                    | E.2.7                | 0.8           | R              | 1.73         | 1.0                   | 1.0                      | 0.5                            | 0.5                              | ∞              |
| Integration Time                                                                 | E.2.8                | 2.6           | R              | 1.73         | 1.0                   | 1.0                      | 1.5                            | 1.5                              | ∞              |
| RF Ambient Conditions                                                            | E.6.1                | 3.0           | R              | 1.73         | 1.0                   | 1.0                      | 1.7                            | 1.7                              | ∞              |
| Probe Positioner Mechanical Tolerance                                            | E.6.2                | 0.4           | R              | 1.73         | 1.0                   | 1.0                      | 0.2                            | 0.2                              | ∞              |
| Probe Positioning w/ respect to Phantom                                          | E.6.3                | 2.9           | R              | 1.73         | 1.0                   | 1.0                      | 1.7                            | 1.7                              | ∞              |
| Extrapolation, Interpolation & Integration algorithms<br>for Max. SAR Evaluation | E.5                  | 1.0           | R              | 1.73         | 1.0                   | 1.0                      | 0.6                            | 0.6                              | ∞              |
| <b>Test Sample Related</b>                                                       |                      |               |                |              |                       |                          |                                |                                  |                |
| Test Sample Positioning                                                          | E.4.2                | 6.0           | N              | 1            | 1.0                   | 1.0                      | 6.0                            | 6.0                              | 287            |
| Device Holder Uncertainty                                                        | E.4.1                | 3.32          | R              | 1.73         | 1.0                   | 1.0                      | 1.9                            | 1.9                              | ∞              |
| Output Power Variation - SAR drift measurement                                   | 6.6.2                | 5.0           | R              | 1.73         | 1.0                   | 1.0                      | 2.9                            | 2.9                              | ∞              |
| <b>Phantom &amp; Tissue Parameters</b>                                           |                      |               |                |              |                       |                          |                                |                                  |                |
| Phantom Uncertainty (Shape & Thickness tolerances)                               | E.3.1                | 4.0           | R              | 1.73         | 1.0                   | 1.0                      | 2.3                            | 2.3                              | ∞              |
| Liquid Conductivity - deviation from target values                               | E.3.2                | 5.0           | R              | 1.73         | 0.64                  | 0.43                     | 1.8                            | 1.2                              | ∞              |
| Liquid Conductivity - measurement uncertainty                                    | E.3.3                | 3.8           | N              | 1            | 0.64                  | 0.43                     | 2.4                            | 1.6                              | 6              |
| Liquid Permittivity - deviation from target values                               | E.3.2                | 5.0           | R              | 1.73         | 0.60                  | 0.49                     | 1.7                            | 1.4                              | ∞              |
| Liquid Permittivity - measurement uncertainty                                    | E.3.3                | 4.5           | N              | 1            | 0.60                  | 0.49                     | 2.7                            | 2.2                              | 6              |
| <b>Combined Standard Uncertainty (k=1)</b>                                       |                      |               |                |              |                       |                          | RSS                            | 12.1                             | 11.7           |
| <b>Expanded Uncertainty</b><br>(95% CONFIDENCE LEVEL)                            |                      |               |                |              |                       |                          | k=2                            | 24.2                             | 23.5           |

The above measurement uncertainties are according to IEEE Std. 1528-2003

|                                          |                                                                                                                                   |                                      |                                                                                       |                                        |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: A3LSMA8000                       |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                                                                         | <b>DUT Type:</b><br>Portable Handset | Page 43 of 47                                                                         |                                        |

Applicable for frequencies up to 6 GHz.

| a                                                                             | b                    | c             | d              | e=<br>f(d,k) | f                     | g                        | h =<br>c x f/e                 | i =<br>c x g/e                   | k              |
|-------------------------------------------------------------------------------|----------------------|---------------|----------------|--------------|-----------------------|--------------------------|--------------------------------|----------------------------------|----------------|
| Uncertainty<br>Component                                                      | IEEE<br>1528<br>Sec. | Tol.<br>(± %) | Prob.<br>Dist. | Div.         | c <sub>i</sub><br>1gm | c <sub>i</sub><br>10 gms | 1gm<br>u <sub>i</sub><br>(± %) | 10gms<br>u <sub>i</sub><br>(± %) | v <sub>i</sub> |
| <b>Measurement System</b>                                                     |                      |               |                |              |                       |                          |                                |                                  |                |
| Probe Calibration                                                             | E.2.1                | 6.55          | N              | 1            | 1.0                   | 1.0                      | 6.6                            | 6.6                              | ∞              |
| Axial Isotropy                                                                | E.2.2                | 0.25          | N              | 1            | 0.7                   | 0.7                      | 0.2                            | 0.2                              | ∞              |
| Hemishperical Isotropy                                                        | E.2.2                | 1.3           | N              | 1            | 1.0                   | 1.0                      | 1.3                            | 1.3                              | ∞              |
| Boundary Effect                                                               | E.2.3                | 0.4           | N              | 1            | 1.0                   | 1.0                      | 0.4                            | 0.4                              | ∞              |
| Linearity                                                                     | E.2.4                | 0.3           | N              | 1            | 1.0                   | 1.0                      | 0.3                            | 0.3                              | ∞              |
| System Detection Limits                                                       | E.2.5                | 5.1           | N              | 1            | 1.0                   | 1.0                      | 5.1                            | 5.1                              | ∞              |
| Readout Electronics                                                           | E.2.6                | 1.0           | N              | 1            | 1.0                   | 1.0                      | 1.0                            | 1.0                              | ∞              |
| Response Time                                                                 | E.2.7                | 0.8           | R              | 1.73         | 1.0                   | 1.0                      | 0.5                            | 0.5                              | ∞              |
| Integration Time                                                              | E.2.8                | 2.6           | R              | 1.73         | 1.0                   | 1.0                      | 1.5                            | 1.5                              | ∞              |
| RF Ambient Conditions                                                         | E.6.1                | 3.0           | R              | 1.73         | 1.0                   | 1.0                      | 1.7                            | 1.7                              | ∞              |
| Probe Positioner Mechanical Tolerance                                         | E.6.2                | 0.4           | R              | 1.73         | 1.0                   | 1.0                      | 0.2                            | 0.2                              | ∞              |
| Probe Positioning w/ respect to Phantom                                       | E.6.3                | 2.9           | R              | 1.73         | 1.0                   | 1.0                      | 1.7                            | 1.7                              | ∞              |
| Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation | E.5                  | 1.0           | R              | 1.73         | 1.0                   | 1.0                      | 0.6                            | 0.6                              | ∞              |
| <b>Test Sample Related</b>                                                    |                      |               |                |              |                       |                          |                                |                                  |                |
| Test Sample Positioning                                                       | E.4.2                | 6.0           | N              | 1            | 1.0                   | 1.0                      | 6.0                            | 6.0                              | 287            |
| Device Holder Uncertainty                                                     | E.4.1                | 3.32          | R              | 1.73         | 1.0                   | 1.0                      | 1.9                            | 1.9                              | ∞              |
| Output Power Variation - SAR drift measurement                                | 6.6.2                | 5.0           | R              | 1.73         | 1.0                   | 1.0                      | 2.9                            | 2.9                              | ∞              |
| <b>Phantom &amp; Tissue Parameters</b>                                        |                      |               |                |              |                       |                          |                                |                                  |                |
| Phantom Uncertainty (Shape & Thickness tolerances)                            | E.3.1                | 4.0           | R              | 1.73         | 1.0                   | 1.0                      | 2.3                            | 2.3                              | ∞              |
| Liquid Conductivity - deviation from target values                            | E.3.2                | 5.0           | R              | 1.73         | 0.64                  | 0.43                     | 1.8                            | 1.2                              | ∞              |
| Liquid Conductivity - measurement uncertainty                                 | E.3.3                | 3.8           | N              | 1            | 0.64                  | 0.43                     | 2.4                            | 1.6                              | 6              |
| Liquid Permittivity - deviation from target values                            | E.3.2                | 5.0           | R              | 1.73         | 0.60                  | 0.49                     | 1.7                            | 1.4                              | ∞              |
| Liquid Permittivity - measurement uncertainty                                 | E.3.3                | 4.5           | N              | 1            | 0.60                  | 0.49                     | 2.7                            | 2.2                              | 6              |
| <b>Combined Standard Uncertainty (k=1)</b>                                    |                      |               |                |              |                       |                          | RSS                            | 12.4                             | 12.0           |
| <b>Expanded Uncertainty</b><br>(95% CONFIDENCE LEVEL)                         |                      |               |                |              |                       |                          | k=2                            | 24.7                             | 24.0           |

The above measurement uncertainties are according to IEEE Std. 1528-2003

|                                   |                                                                                     |                               |                                                                                       |                                 |
|-----------------------------------|-------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                |  | SAR EVALUATION REPORT         |  | Reviewed by:<br>Quality Manager |
| Document S/N:<br>0Y1505130868.A3L | Test Dates:<br>05/14/15 - 05/26/15                                                  | DUT Type:<br>Portable Handset |                                                                                       | Page 44 of 47                   |



## 16 CONCLUSION

### 16.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

|                                          |                                                                                     |                                      |                                                                                       |                                        |
|------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMA8000                |  | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                           | <b>DUT Type:</b><br>Portable Handset |                                                                                       | Page 45 of 47                          |

## 17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.

|                                          |                                                                                     |                                      |                                                                                       |                                        |
|------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMA8000                |  | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                           | <b>DUT Type:</b><br>Portable Handset |                                                                                       | Page 46 of 47                          |

- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01 Wi-Fi SAR v02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

|                                          |                                                                                     |                                      |                                                                                       |                                        |
|------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMA8000                |  | <b>SAR EVALUATION REPORT</b>         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>0Y1505130868.A3L | <b>Test Dates:</b><br>05/14/15 - 05/26/15                                           | <b>DUT Type:</b><br>Portable Handset |                                                                                       | Page 47 of 47                          |

## APPENDIX A: SAR TEST DATA

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01ZKB**

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Head, Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.913 \text{ S/m}$ ;  $\epsilon_r = 42.585$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 05-14-2015; Ambient Temp: 22.5°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3288; ConvF(6.51, 6.51, 6.51); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: GSM 850, Right Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.781 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0990 W/kg

**SAR(1 g) = 0.083 W/kg**

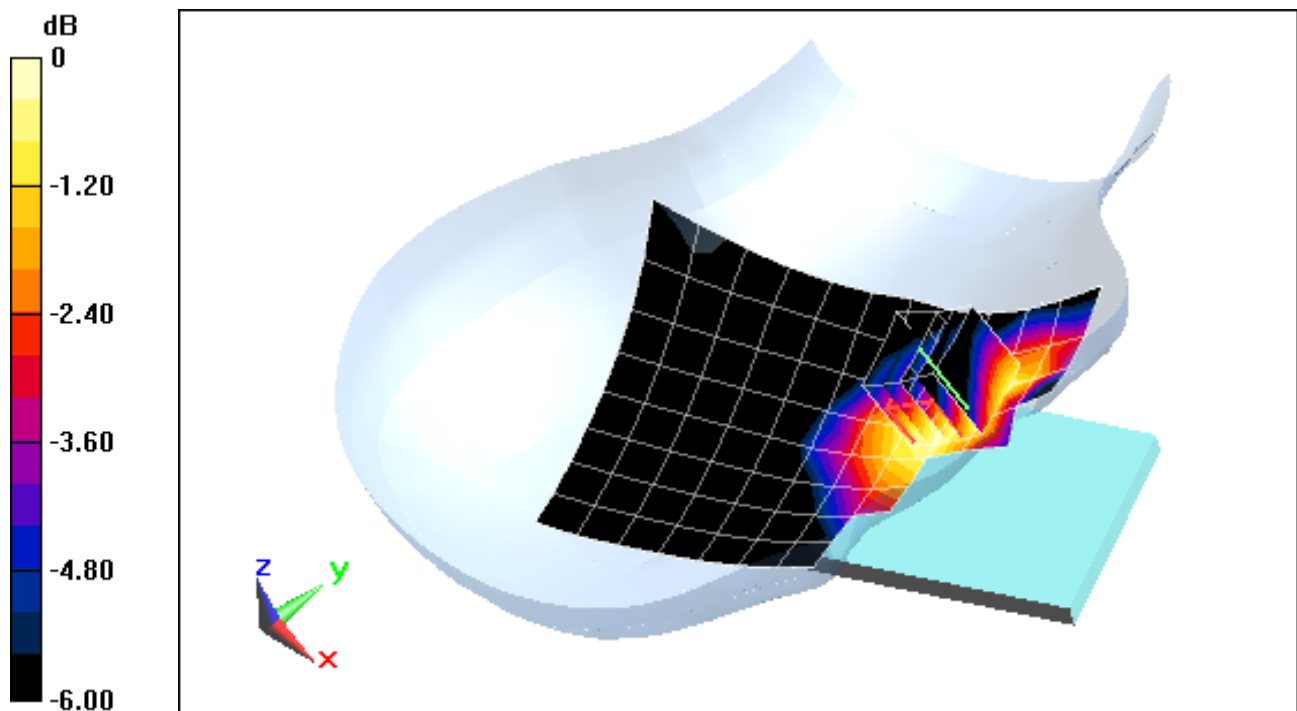

0 dB = 0.0891 W/kg = -10.50 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01YKW**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head, Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.913 \text{ S/m}$ ;  $\epsilon_r = 42.585$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 05-14-2015; Ambient Temp: 22.5°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3288; ConvF(6.51, 6.51, 6.51); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 850, Right Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.597 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0950 W/kg

**SAR(1 g) = 0.080 W/kg**

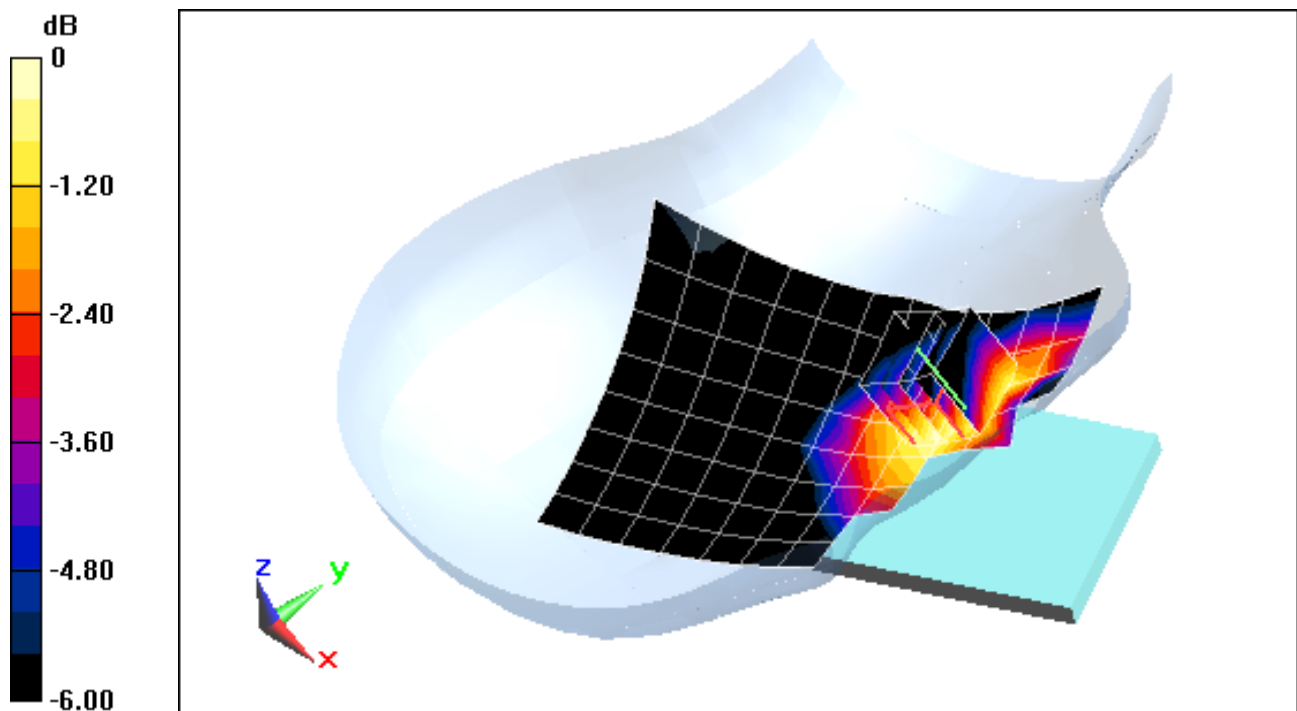

0 dB = 0.0861 W/kg = -10.65 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01ZKB**

Communication System: UID 0, GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Head, Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.393 \text{ S/m}$ ;  $\epsilon_r = 38.756$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 05-14-2015; Ambient Temp: 22.7°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3318; ConvF(5.05, 5.05, 5.05); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: GSM 1900, Right Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.706 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.102 W/kg

**SAR(1 g) = 0.064 W/kg**

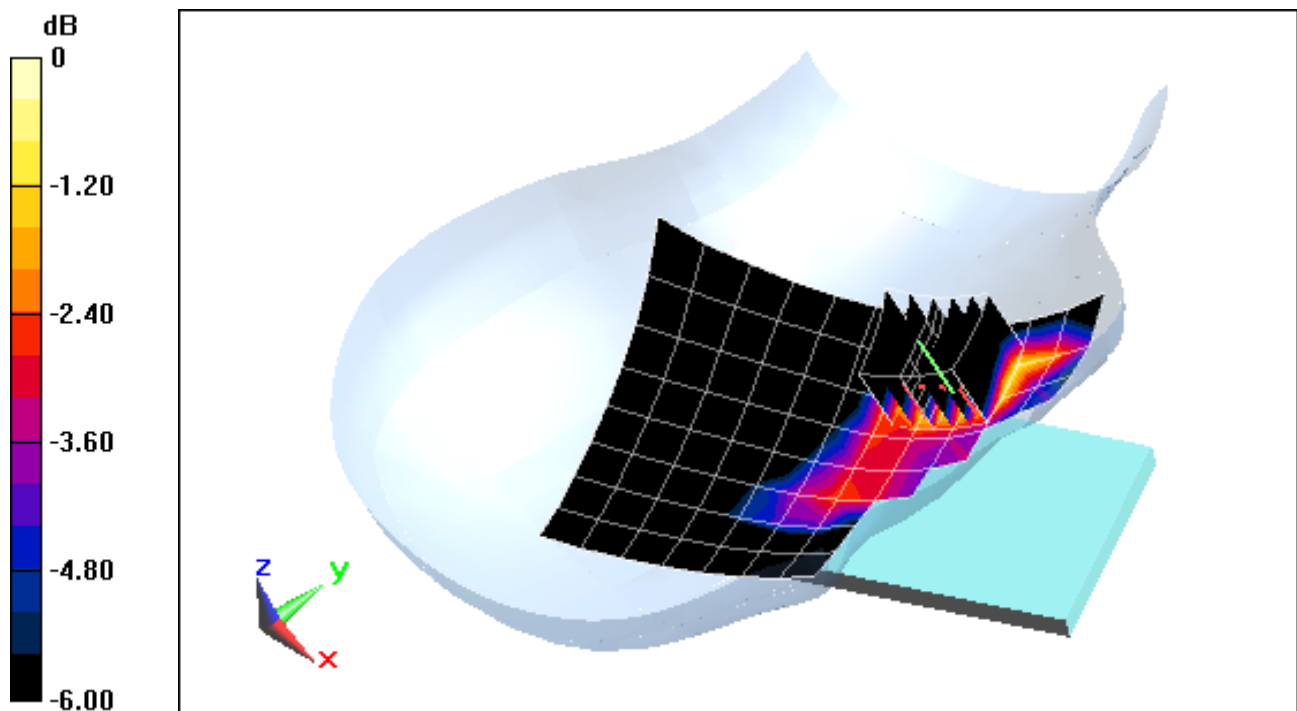

0 dB = 0.0772 W/kg = -11.12 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01YKW**

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head, Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.393 \text{ S/m}$ ;  $\epsilon_r = 38.756$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 05-14-2015; Ambient Temp: 22.7°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3318; ConvF(5.05, 5.05, 5.05); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 1900, Left Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.217 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.139 W/kg

**SAR(1 g) = 0.089 W/kg**

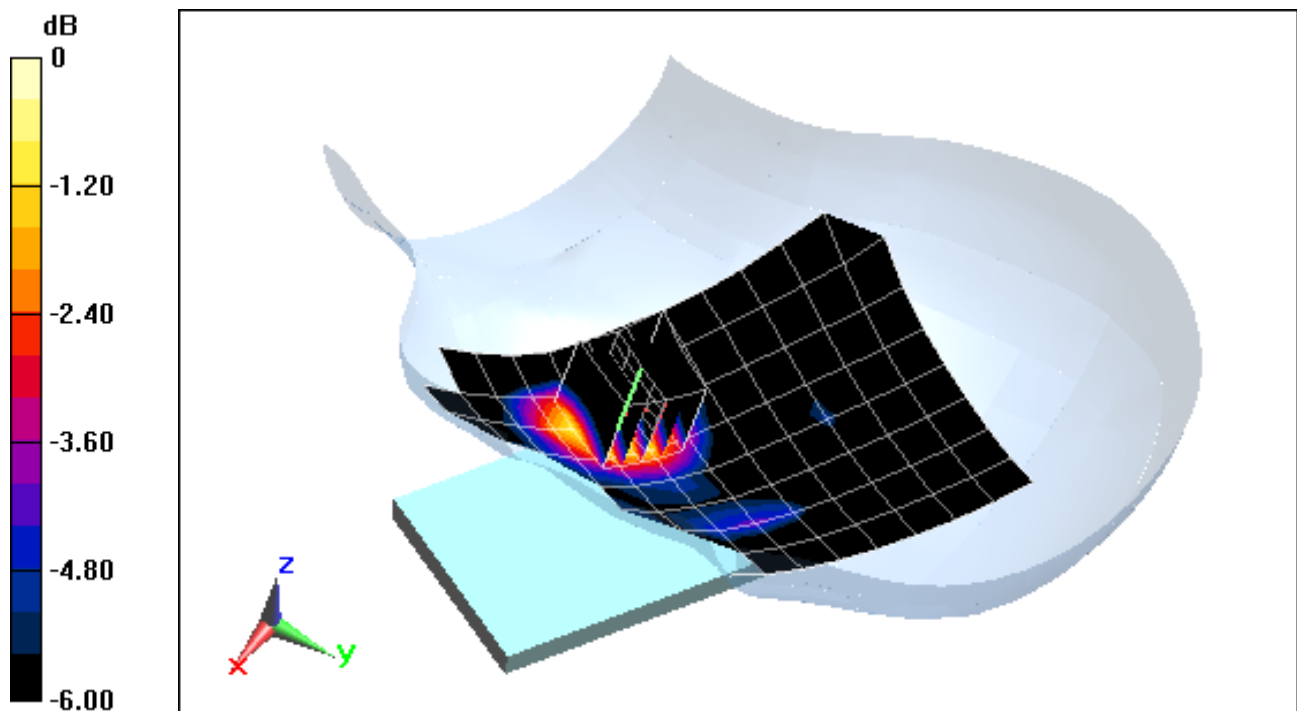

0 dB = 0.101 W/kg = -9.96 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01YKW**

Communication System: UID 0, LTE Band 41; Frequency: 2645 MHz; Duty Cycle: 1:1.58

Medium: 2600 Head, Medium parameters used (interpolated):

$f = 2645 \text{ MHz}$ ;  $\sigma = 2.1 \text{ S/m}$ ;  $\epsilon_r = 37.042$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 05-18-2015; Ambient Temp: 22.3°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3318; ConvF(4.34, 4.34, 4.34); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 41, Right Head, Cheek, High.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (10x17x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x8x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.415 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.134 W/kg

**SAR(1 g) = 0.071 W/kg**

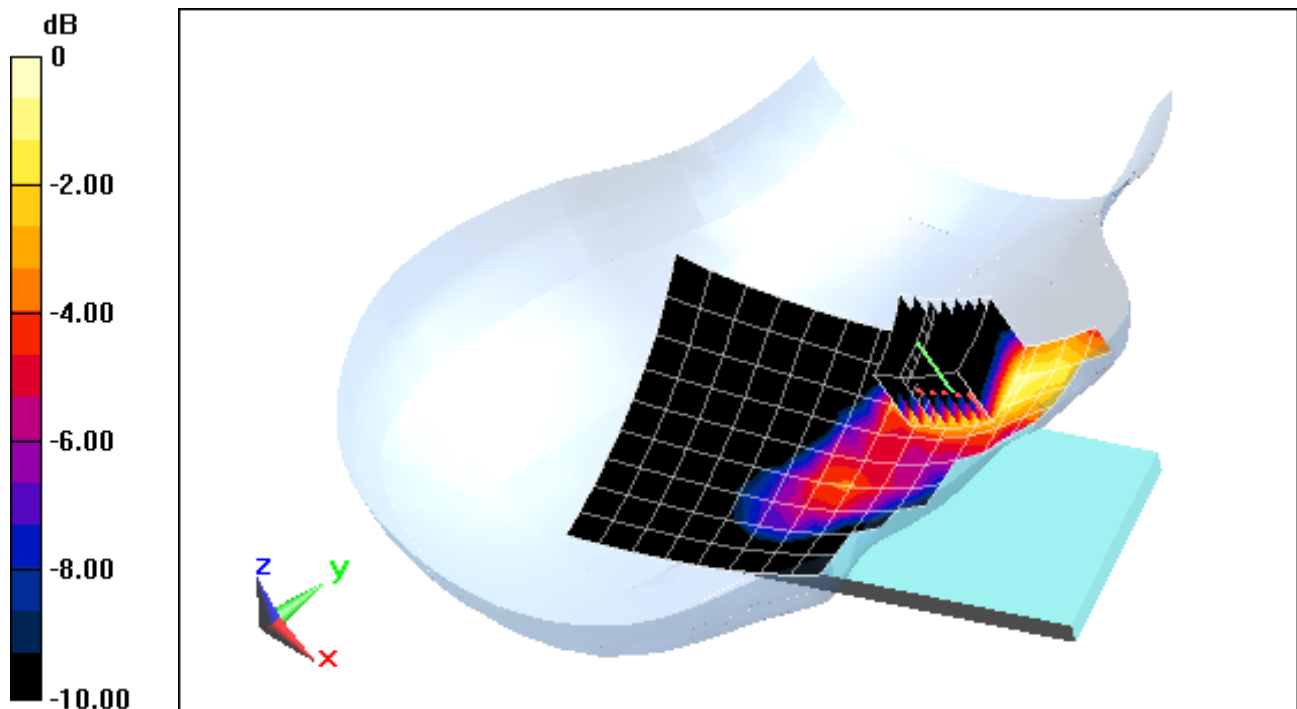

0 dB = 0.0881 W/kg = -10.55 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01YKW**

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Head, Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$ ;  $\sigma = 1.861 \text{ S/m}$ ;  $\epsilon_r = 37.971$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 05-18-2015; Ambient Temp: 20.2°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3318; ConvF(4.5, 4.5, 4.5); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, 22 MHz Bandwidth, Right Head, Cheek, Ch 06, 1 Mbps**


**Area Scan (10x17x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (9x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 15.36 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.539 W/kg**

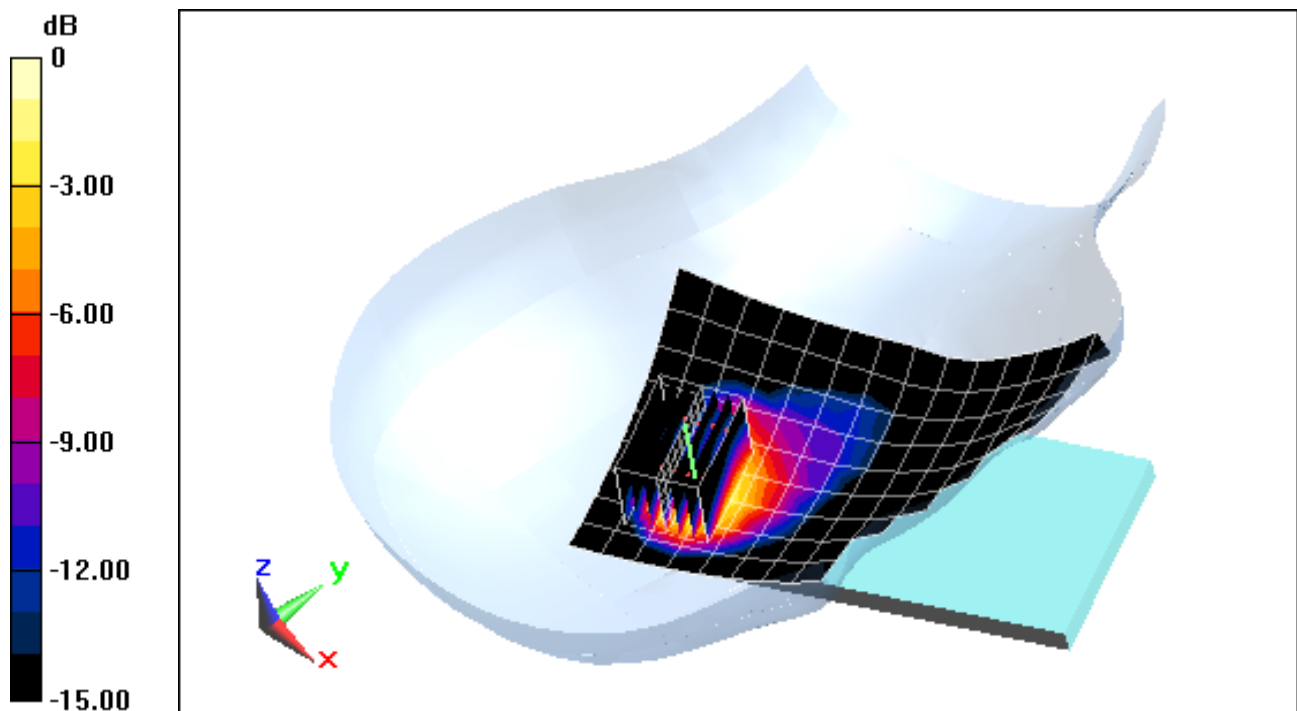

0 dB = 0.711 W/kg = -1.48 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01YKW**

Communication System: UID 0, IEEE 802.11n; Frequency: 5510 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head, Medium parameters used (interpolated):

$f = 5510 \text{ MHz}$ ;  $\sigma = 4.828 \text{ S/m}$ ;  $\epsilon_r = 35.999$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 05-26-2015; Ambient Temp: 21.1°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7357; ConvF(4.7, 4.7, 4.7); Calibrated: 4/23/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11n, 40 MHz Bandwidth, 5.5 GHz,  
Right Head, Cheek, Ch 102, 13.5 Mbps**


**Area Scan (13x22x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio: 1.4

Reference Value = 11.78 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 3.10 W/kg

**SAR(1 g) = 0.667 W/kg**

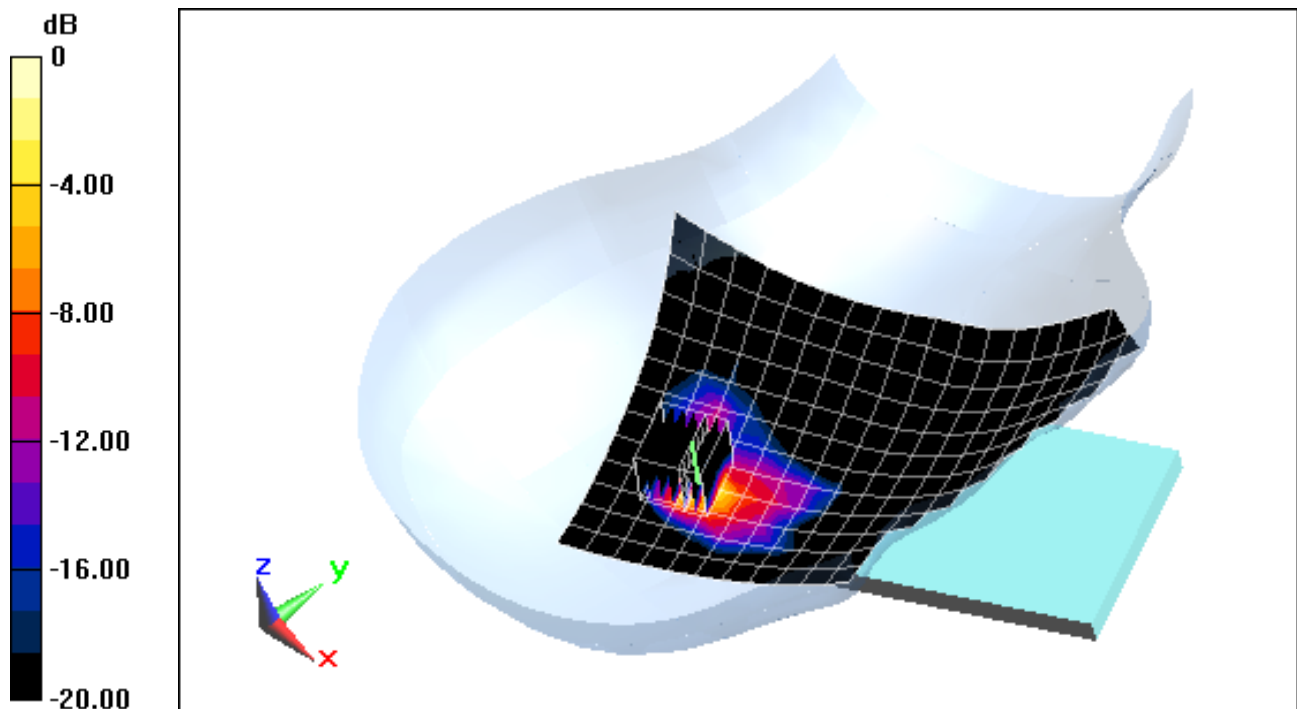

0 dB = 1.89 W/kg = 2.76 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01ZKB**

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Body, Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 1.001 \text{ S/m}$ ;  $\epsilon_r = 53.737$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-20-2015; Ambient Temp: 21.1°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3209; ConvF(6.07, 6.07, 6.07); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: GSM 850, Body SAR, Back Side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.87 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.743 W/kg**

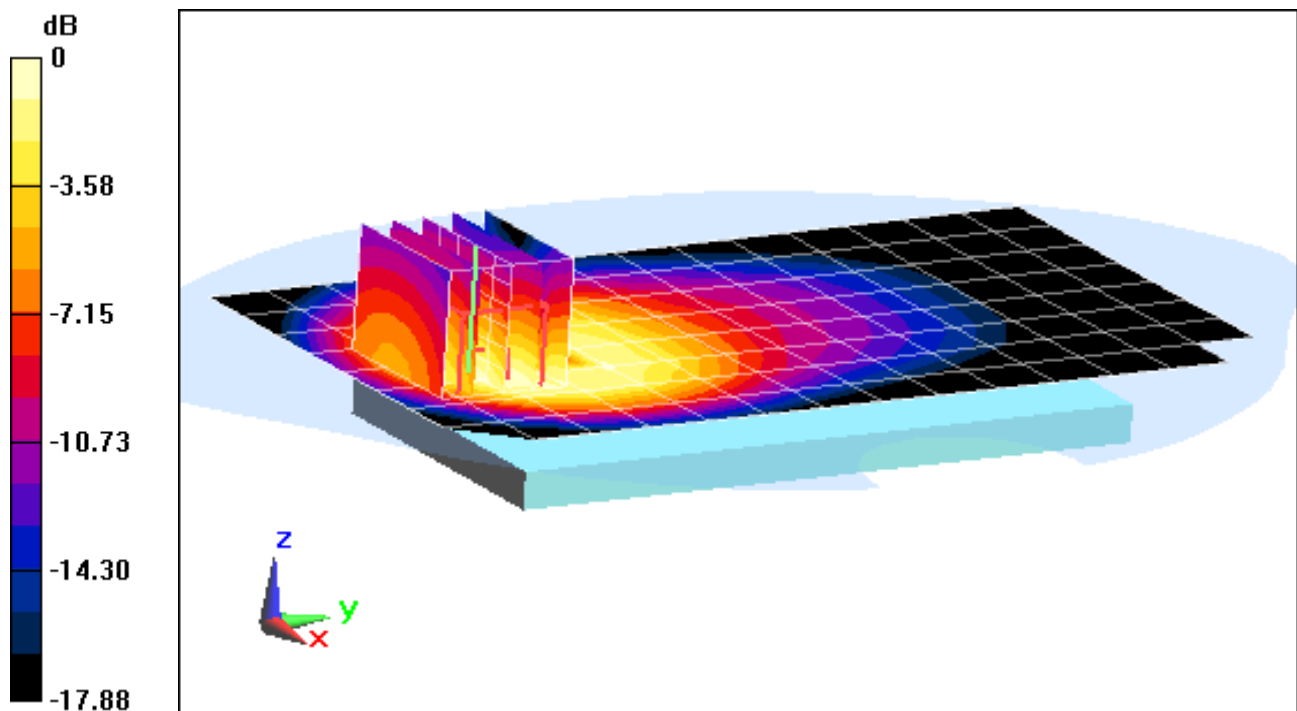

0 dB = 0.877 W/kg = -0.57 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01ZKB**

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Body, Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 1.001 \text{ S/m}$ ;  $\epsilon_r = 53.737$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-20-2015; Ambient Temp: 21.1°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3209; ConvF(6.07, 6.07, 6.07); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: GPRS 850, Body SAR, Back Side, Mid.ch, 3 Tx Slots**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 31.17 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 0.991 W/kg**

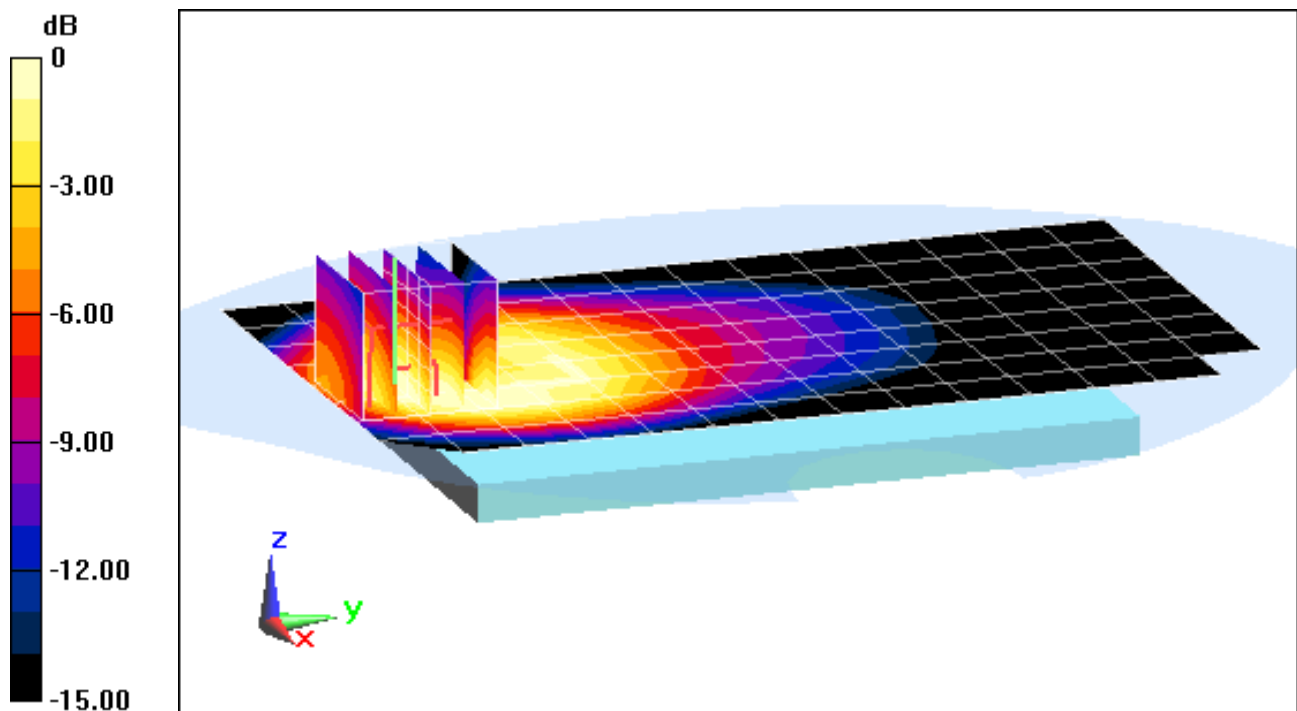

0 dB = 0.990 W/kg = -0.04 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01YKW**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body, Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 1.019 \text{ S/m}$ ;  $\epsilon_r = 53.908$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-26-2015; Ambient Temp: 22.3°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(6.23, 6.23, 6.23); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 850, Body SAR, Back Side, Mid.ch**


**Area Scan (8x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 19.49 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.548 W/kg

**SAR(1 g) = 0.370 W/kg**

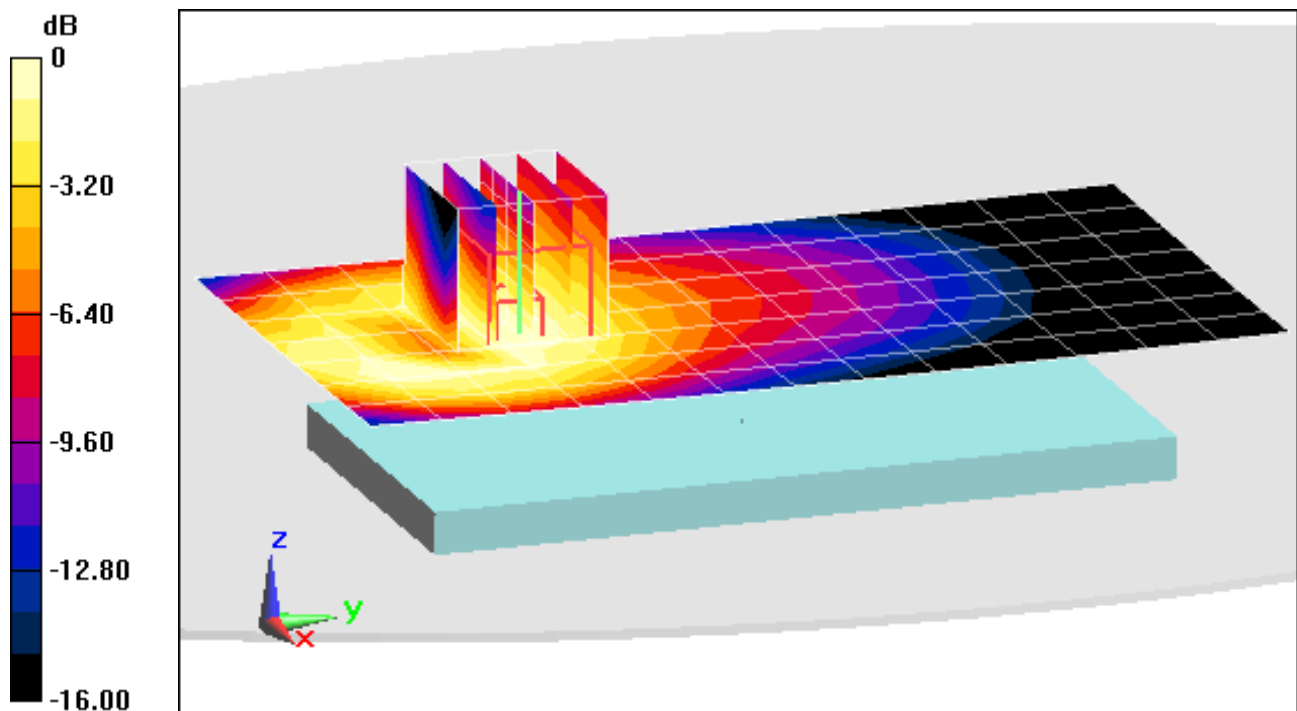

0 dB = 0.424 W/kg = -3.73 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01Y3R**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body, Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 1.019 \text{ S/m}$ ;  $\epsilon_r = 53.908$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-26-2015; Ambient Temp: 22.3°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(6.23, 6.23, 6.23); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 850, Body SAR, Back Side, Mid.ch**


**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.92 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.635 W/kg

**SAR(1 g) = 0.364 W/kg**

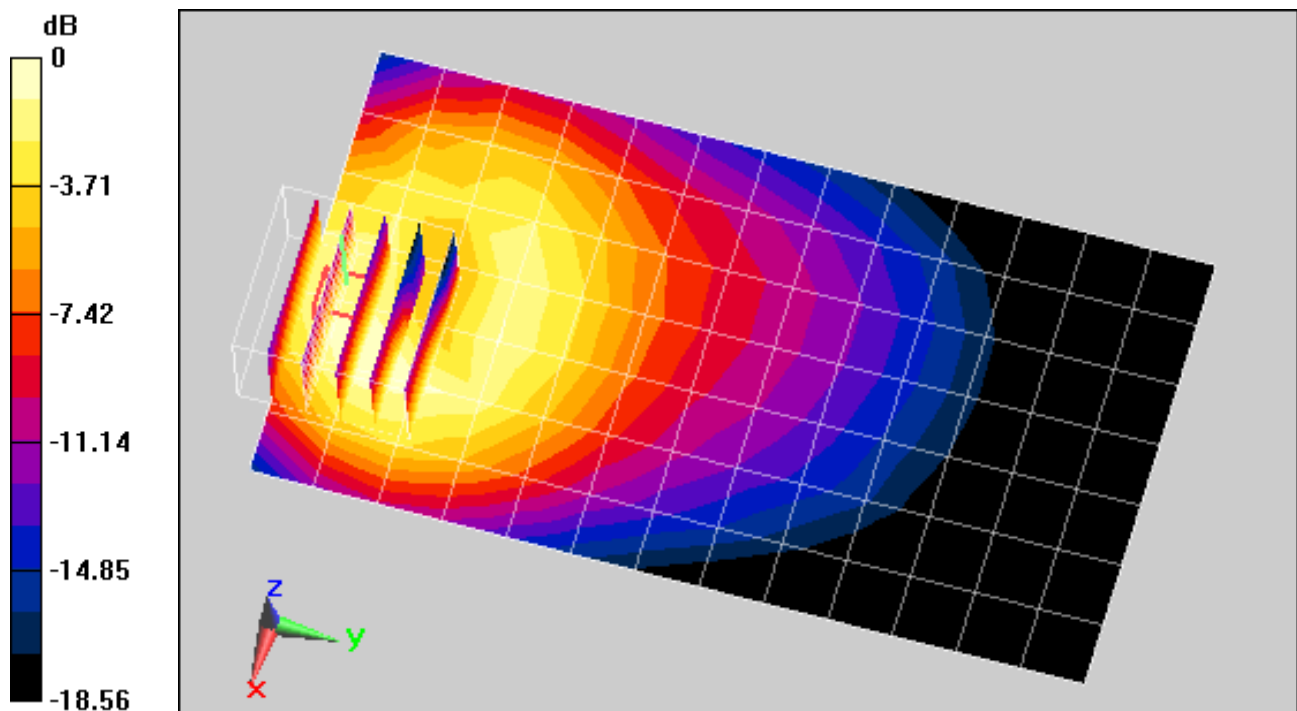

0 dB = 0.437 W/kg = -3.60 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01ZKB**

Communication System: UID 0, GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: 1900 Body, Medium parameters used:

$f = 1910 \text{ MHz}$ ;  $\sigma = 1.556 \text{ S/m}$ ;  $\epsilon_r = 50.998$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-19-2015; Ambient Temp: 22.7°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3258; ConvF(4.64, 4.64, 4.64); Calibrated: 2/27/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/18/2015

Phantom: ELI Front; Type: QDOVA002AA; Serial: TP:1202

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: GSM 1900, Body SAR, Back Side, High.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 25.28 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.41 W/kg

**SAR(1 g) = 0.831 W/kg**

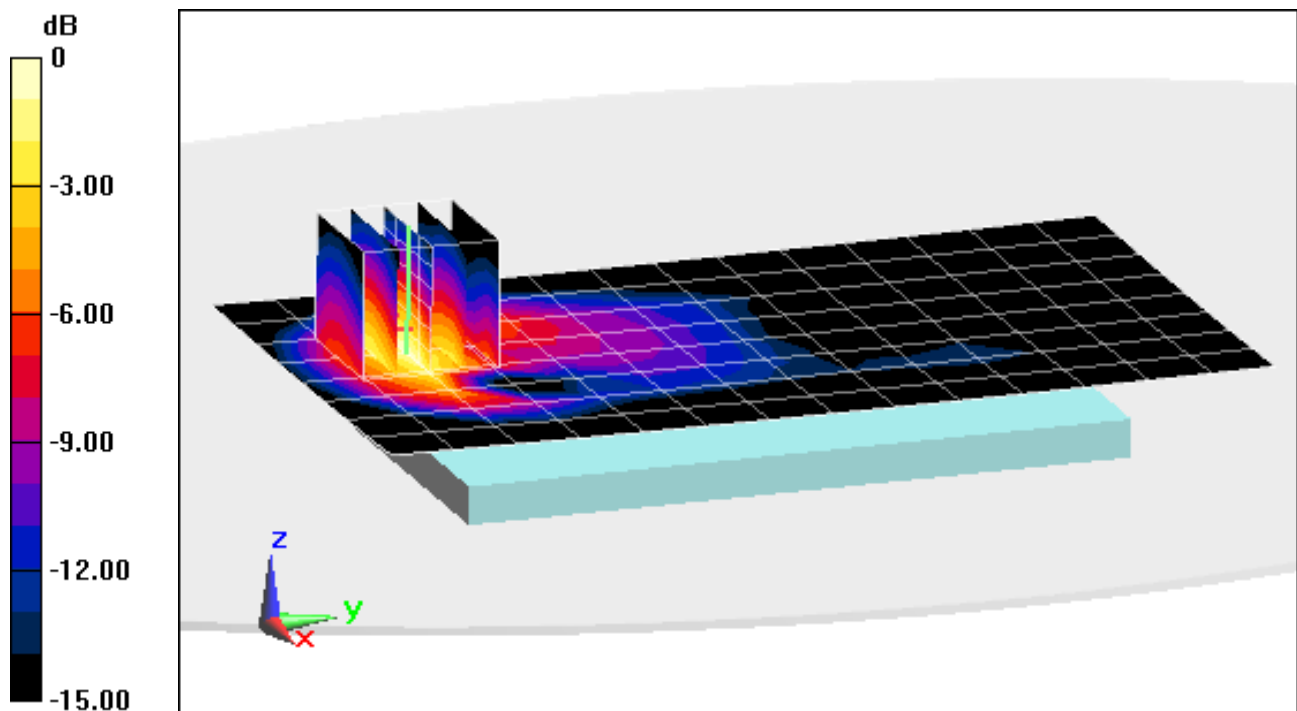

0 dB = 1.05 W/kg = 0.21 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01ZKB**

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2.076

Medium: 1900 Body, Medium parameters used:

$f = 1910 \text{ MHz}$ ;  $\sigma = 1.556 \text{ S/m}$ ;  $\epsilon_r = 50.998$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-19-2015; Ambient Temp: 22.7°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3258; ConvF(4.64, 4.64, 4.64); Calibrated: 2/27/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/18/2015

Phantom: ELI Front; Type: QDOVA002AA; Serial: TP:1202

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: GPRS 1900, Body SAR, Bottom Edge, Mid.ch, 4 Tx Slots**


**Area Scan (10x9x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.05 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.34 W/kg

**SAR(1 g) = 0.807 W/kg**

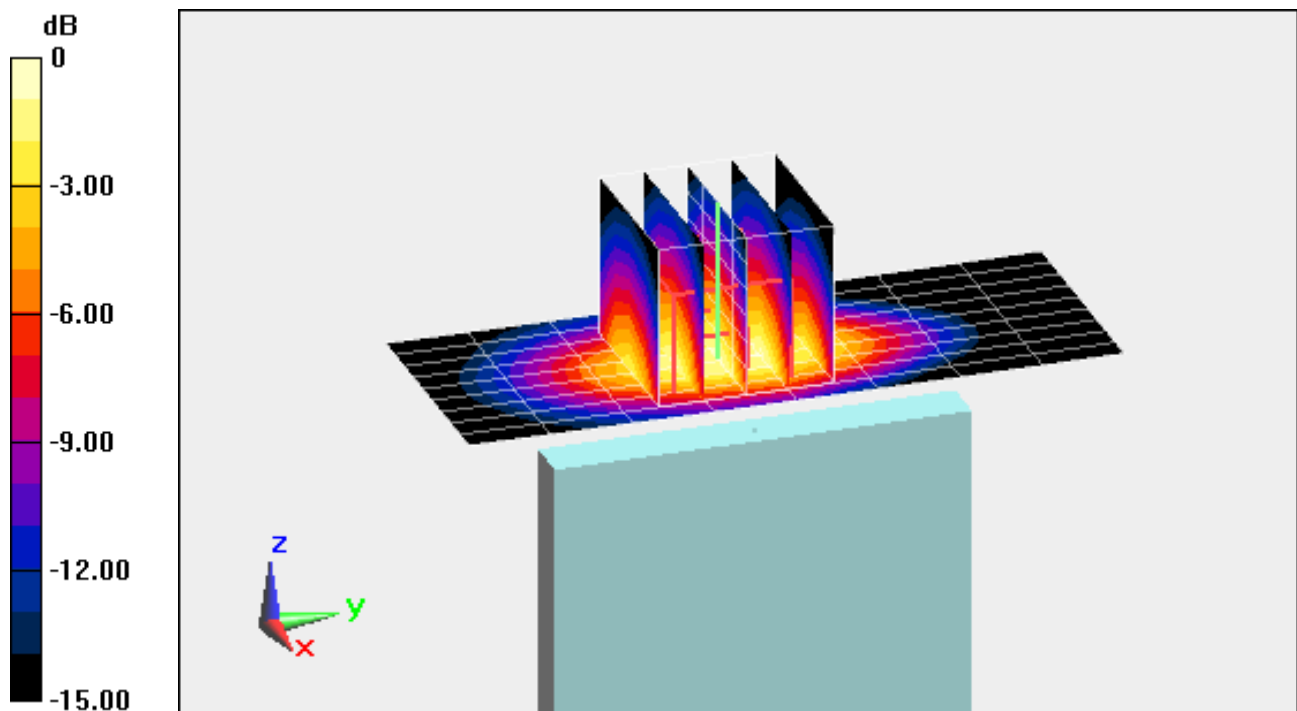

0 dB = 1.00 W/kg = 0.00 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01YKW**

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body, Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.543 \text{ S/m}$ ;  $\epsilon_r = 51.271$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-18-2015; Ambient Temp: 21.1°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3258; ConvF(4.64, 4.64, 4.64); Calibrated: 2/27/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/18/2015

Phantom: ELI Front; Type: QDOVA002AA; Serial: TP:1202

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 1900, Body SAR, Back Side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 17.13 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.728 W/kg

**SAR(1 g) = 0.461 W/kg**

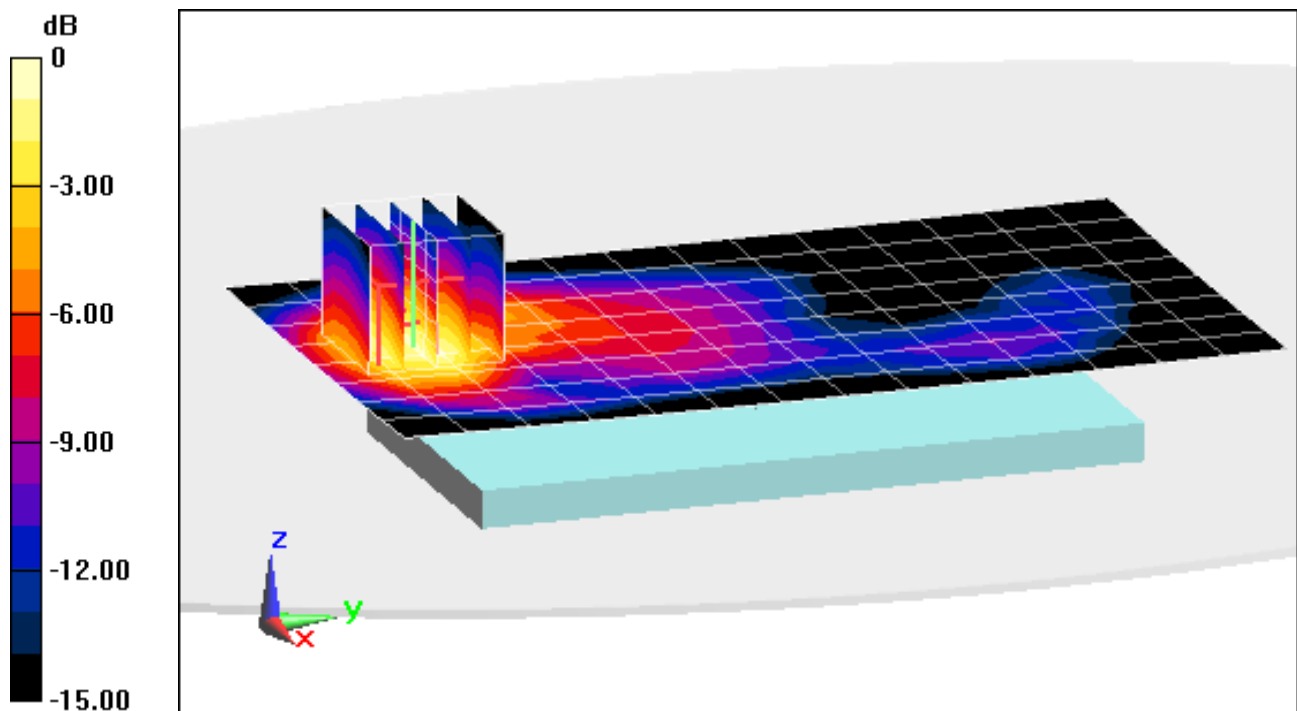

0 dB = 0.562 W/kg = -2.50 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01YKW**

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body, Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.543 \text{ S/m}$ ;  $\epsilon_r = 51.271$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-18-2015; Ambient Temp: 21.1°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3258; ConvF(4.64, 4.64, 4.64); Calibrated: 2/27/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/18/2015

Phantom: ELI Front; Type: QDOVA002AA; Serial: TP:1202

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: UMTS 1900, Body SAR, Bottom Edge, Mid.ch**


**Area Scan (10x9x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.53 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.656 W/kg**

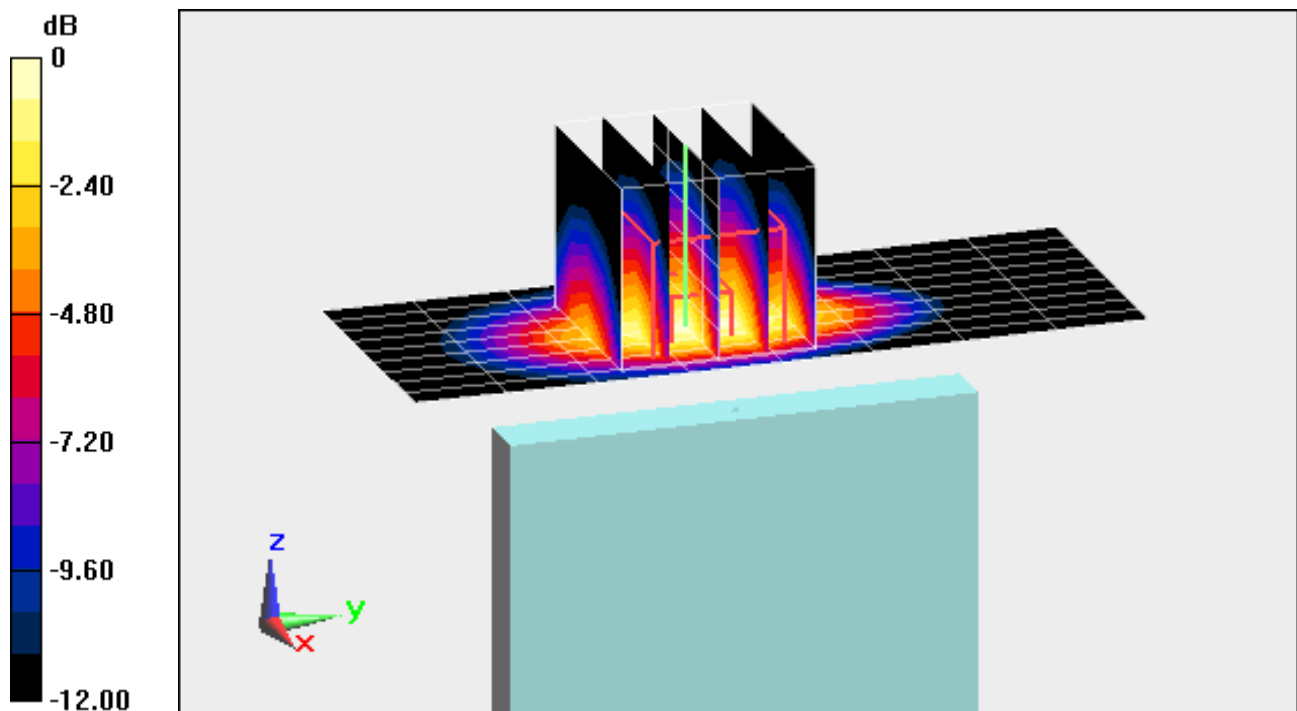

0 dB = 0.819 W/kg = -0.87 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01YKW**

Communication System: UID 0, LTE Band 41; Frequency: 2645 MHz; Duty Cycle: 1:1.58

Medium: 2600 Body, Medium parameters used (interpolated):

$f = 2645 \text{ MHz}$ ;  $\sigma = 2.237 \text{ S/m}$ ;  $\epsilon_r = 50.511$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-14-2015; Ambient Temp: 22.8°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3332; ConvF(4.11, 4.11, 4.11); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 41, Body SAR, Back Side, High.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (10x16x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (11x9x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.21 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.500 W/kg**

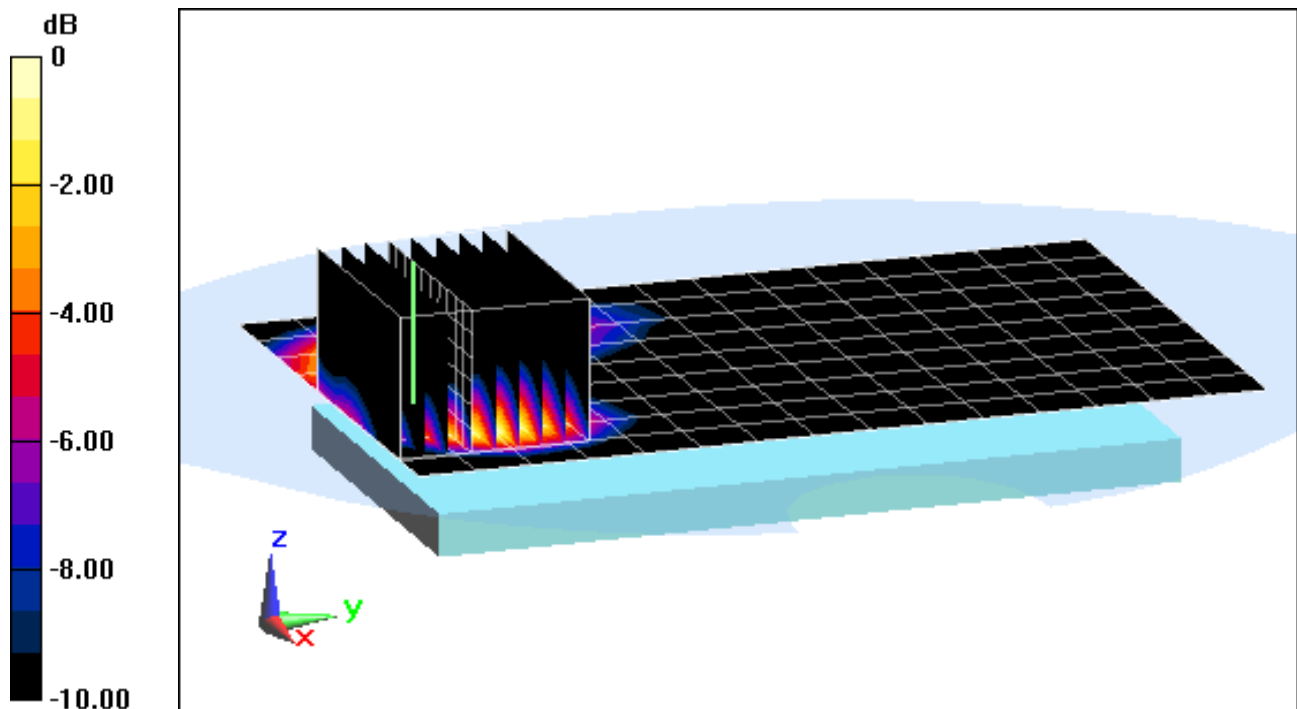

0 dB = 0.636 W/kg = -1.97 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01YKW**

Communication System: UID 0, LTE Band 41; Frequency: 2645 MHz; Duty Cycle: 1:1.58

Medium: 2600 Body, Medium parameters used (interpolated):

$f = 2645 \text{ MHz}$ ;  $\sigma = 2.237 \text{ S/m}$ ;  $\epsilon_r = 50.511$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-14-2015; Ambient Temp: 22.8°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3332; ConvF(4.11, 4.11, 4.11); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 41, Body SAR, Bottom Edge, High.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (10x10x1):** Measurement grid: dx=5mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.13 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.54 W/kg

**SAR(1 g) = 0.727 W/kg**

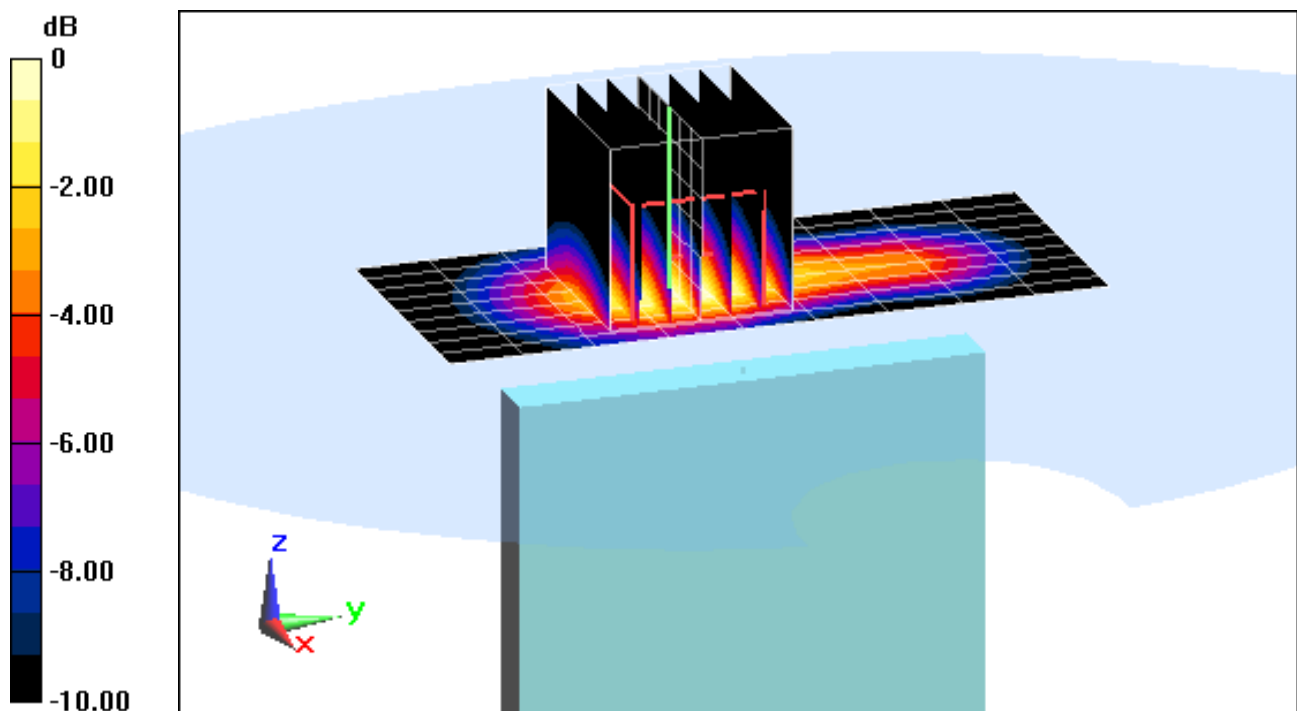

0 dB = 0.936 W/kg = -0.29 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01ZCY**

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body, Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$ ;  $\sigma = 1.974 \text{ S/m}$ ;  $\epsilon_r = 51.043$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-18-2015; Ambient Temp: 21.9°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3332; ConvF(4.31, 4.31, 4.31); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, 22 MHz Bandwidth, Body SAR, Ch 06, 1 Mbps, Back Side**


**Area Scan (11x17x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.512 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.136 W/kg

**SAR(1 g) = 0.074 W/kg**

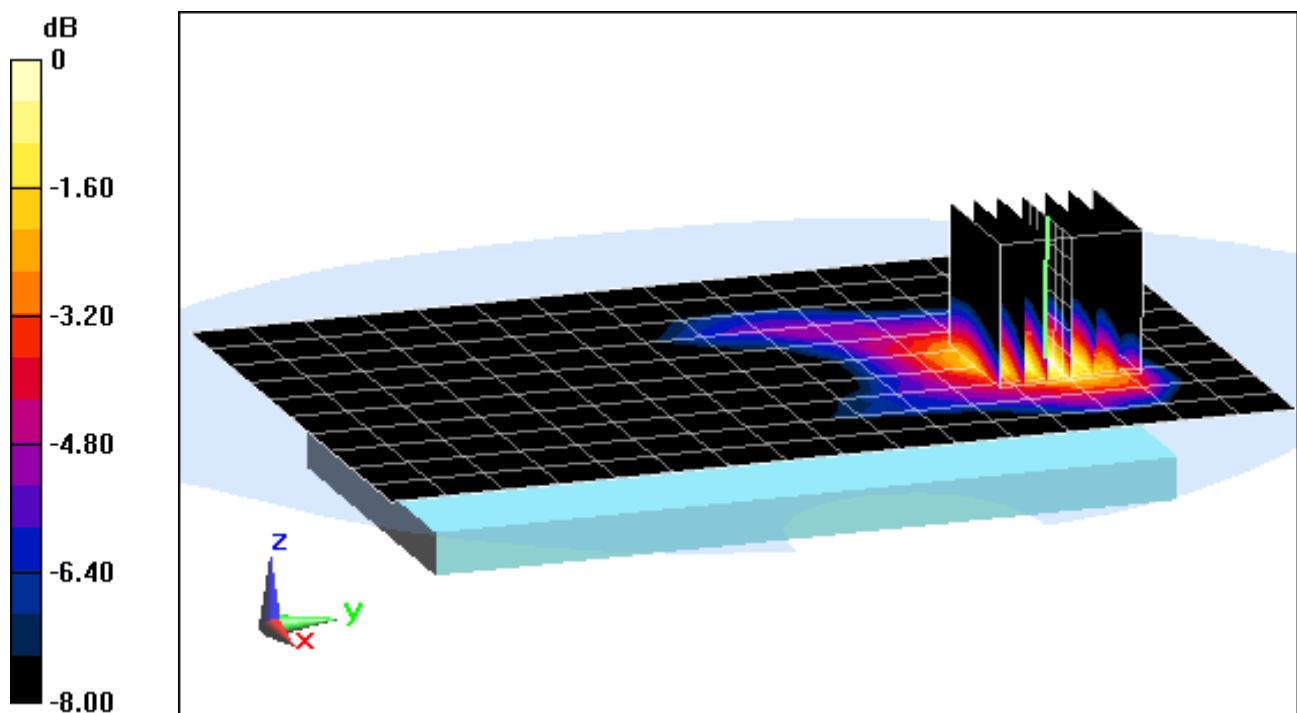

0 dB = 0.0916 W/kg = -10.38 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01ZCY**

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body, Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$ ;  $\sigma = 1.974 \text{ S/m}$ ;  $\epsilon_r = 51.043$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-18-2015; Ambient Temp: 21.9°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3332; ConvF(4.31, 4.31, 4.31); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, 22 MHz Bandwidth, Body SAR, Ch 06, 1 Mbps, Front Side**


**Area Scan (11x17x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.975 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.164 W/kg

**SAR(1 g) = 0.086 W/kg**

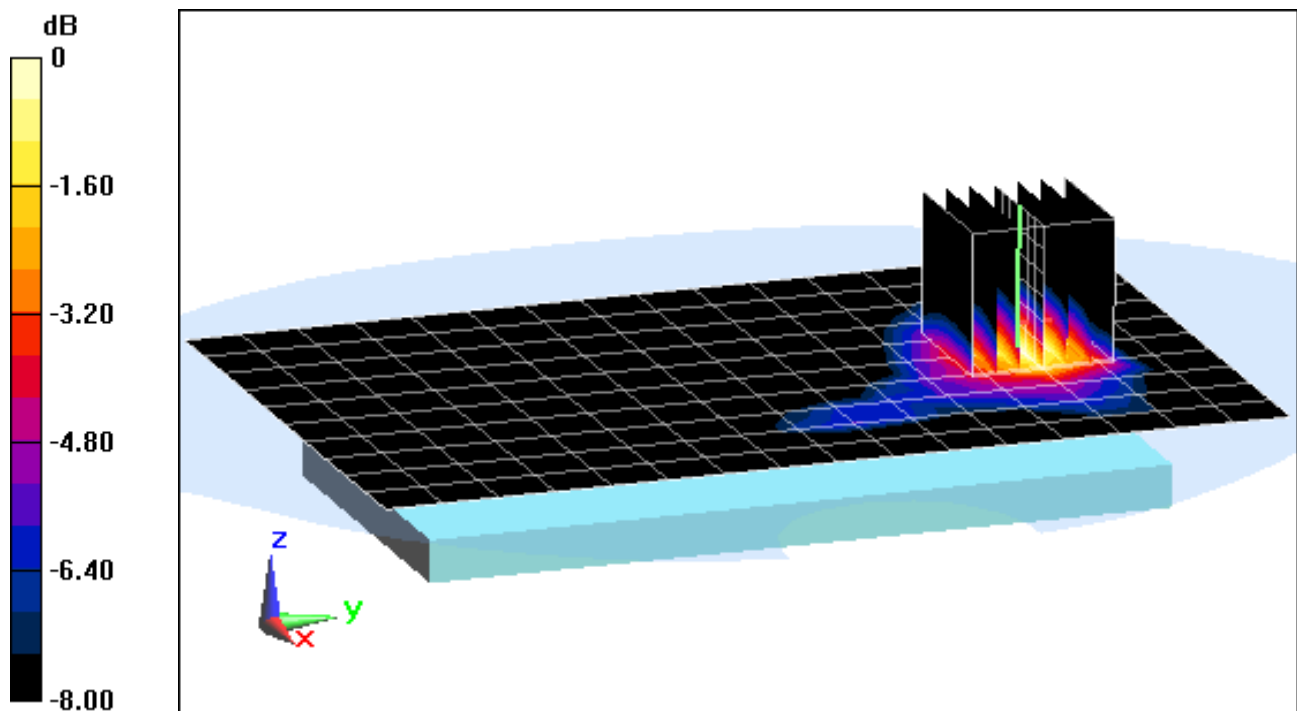

0 dB = 0.107 W/kg = -9.71 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01ZCY**

Communication System: UID 0, 802.11n 5.2-5.8 GHz Band; Frequency: 5270 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body, Medium parameters used (interpolated):

$f = 5270 \text{ MHz}$ ;  $\sigma = 5.48 \text{ S/m}$ ;  $\epsilon_r = 47.062$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-18-2015; Ambient Temp: 24.3°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3914; ConvF(4.33, 4.33, 4.33); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11n, 40 MHz Bandwidth, 5.3 GHz,  
Body SAR, Ch 54, 13.5 Mbps, Back Side**


**Area Scan (13x22x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 3.167 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.215 W/kg

**SAR(1 g) = 0.050 W/kg**

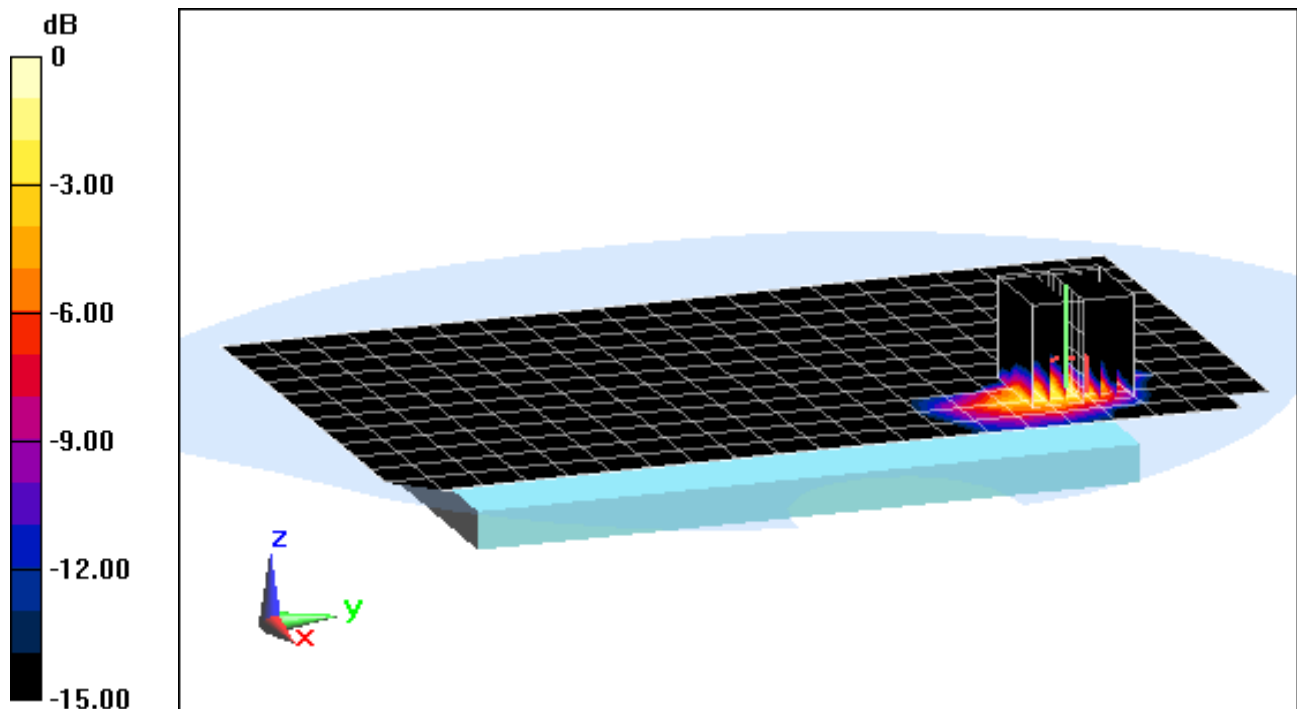

0 dB = 0.130 W/kg = -8.86 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01ZCY**

Communication System: UID 0, 802.11n 5.2-5.8 GHz Band; Frequency: 5755 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body, Medium parameters used (interpolated):

$f = 5755 \text{ MHz}$ ;  $\sigma = 6.123 \text{ S/m}$ ;  $\epsilon_r = 46.267$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-18-2015; Ambient Temp: 24.2°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3914; ConvF(4.01, 4.01, 4.01); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11n, 40 MHz Bandwidth, 5.8 GHz,  
Body SAR, Ch 151, 13.5 Mbps, Front Side**


**Area Scan (13x22x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 1.895 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.236 W/kg

**SAR(1 g) = 0.021 W/kg**

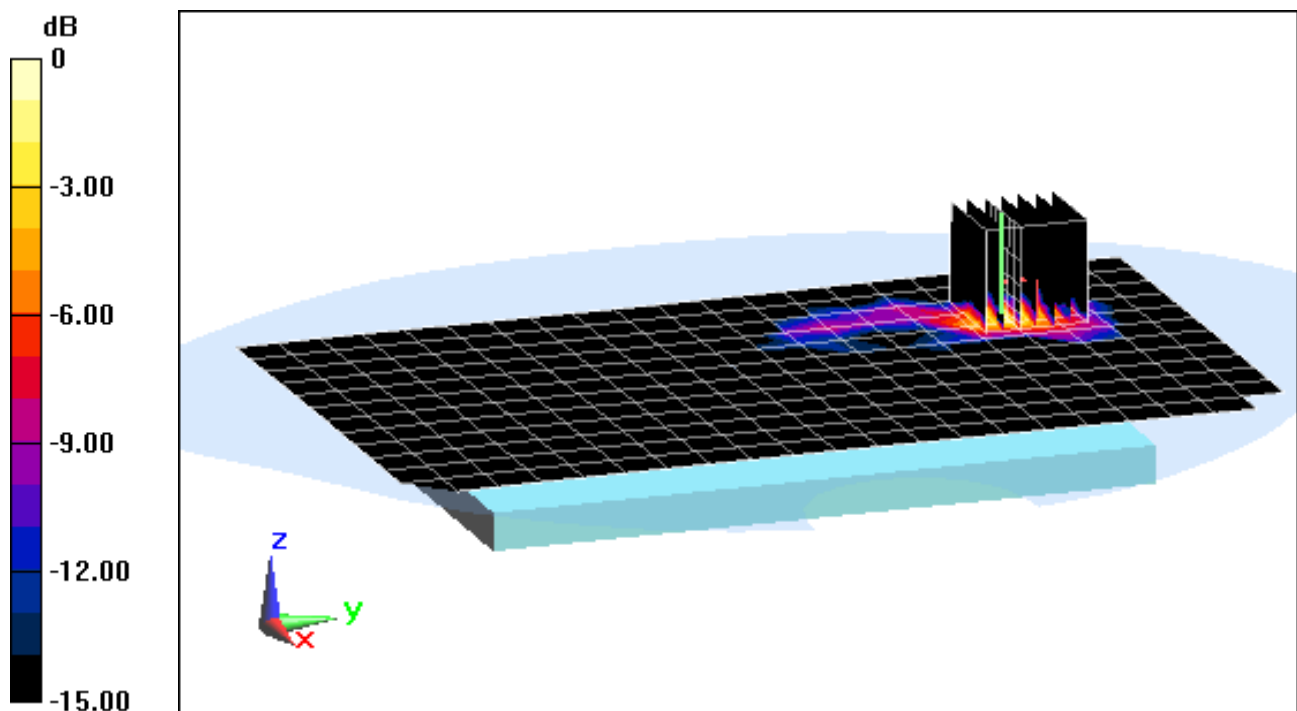

0 dB = 0.0685 W/kg = -11.64 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: A3LSMA8000; Type: Portable Handset; Serial: 01ZCY**

Communication System: UID 0, 802.11n 5.2-5.8 GHz Band; Frequency: 5510 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body, Medium parameters used (interpolated):

$f = 5510 \text{ MHz}$ ;  $\sigma = 5.788 \text{ S/m}$ ;  $\epsilon_r = 46.689$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 05-18-2015; Ambient Temp: 24.2°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3914; ConvF(3.91, 3.91, 3.91); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11n, 40 MHz Bandwidth, 5.5 GHz,  
Extremity SAR, Ch 102, 13.5 Mbps, Front Side**


**Area Scan (13x22x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 14.04 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 6.84 W/kg

**SAR(10 g) = 0.352 W/kg**

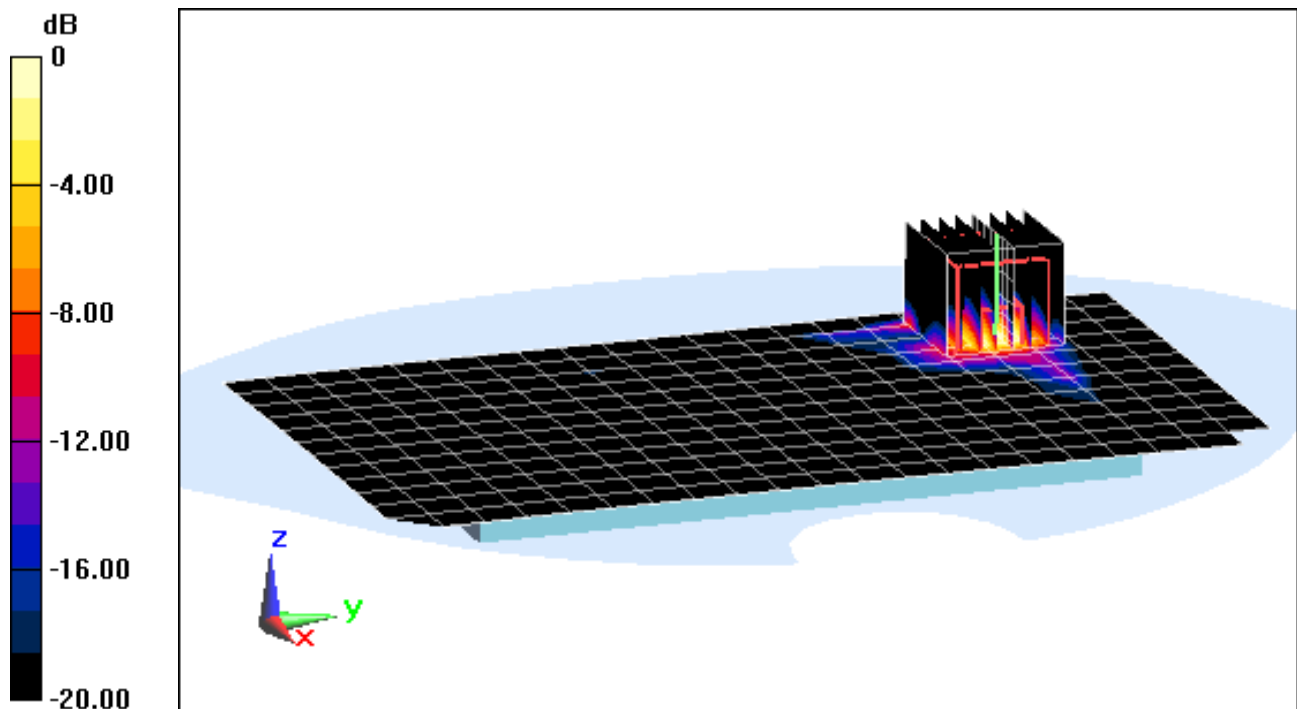

0 dB = 3.42 W/kg = 5.34 dBW/kg

## APPENDIX B: SYSTEM VERIFICATION

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head, Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.912 \text{ S/m}$ ;  $\epsilon_r = 42.602$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-14-2015; Ambient Temp: 22.5°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3288; ConvF(6.51, 6.51, 6.51); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 835 MHz System Verification

**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.46 W/kg

**SAR(1 g) = 0.978 W/kg**

Deviation = 6.30%

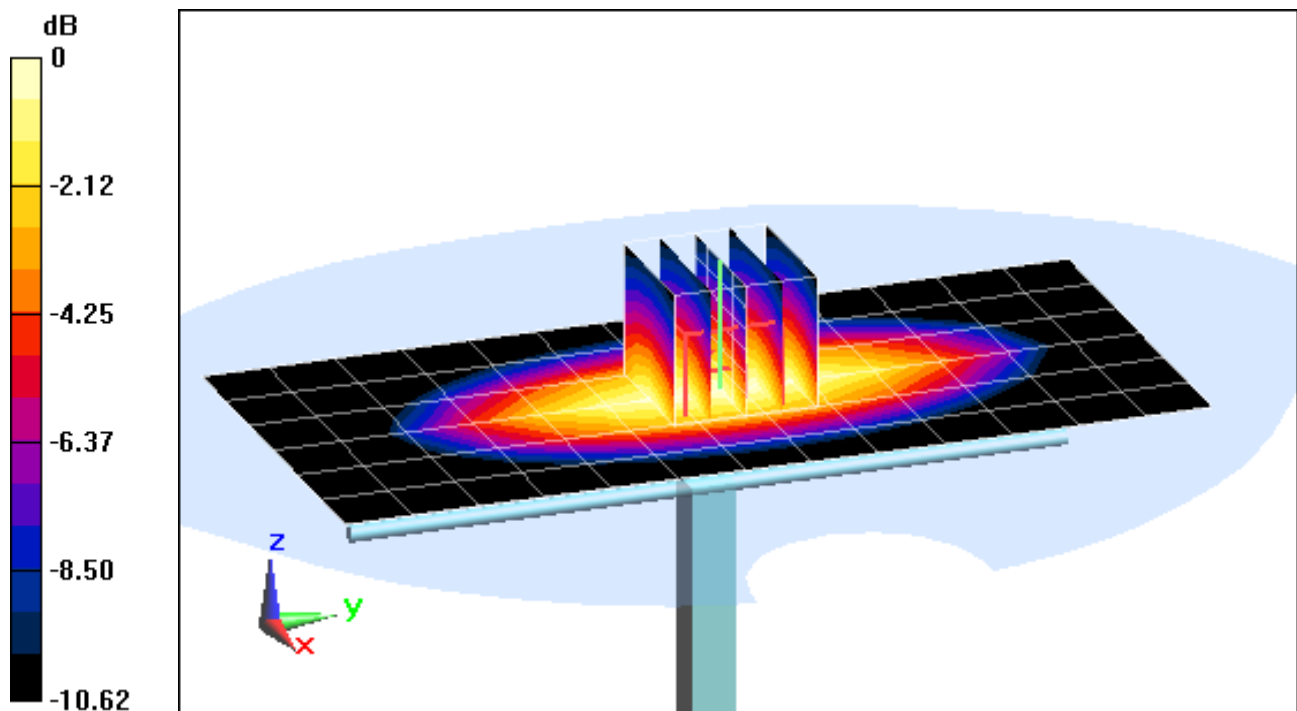

0 dB = 1.15 W/kg = 0.61 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head, Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.417 \text{ S/m}$ ;  $\epsilon_r = 38.693$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-14-2015; Ambient Temp: 22.7°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3318; ConvF(5.05, 5.05, 5.05); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 1900 MHz System Verification

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 7.02 W/kg

**SAR(1 g) = 3.84 W/kg**

Deviation = -4.48%

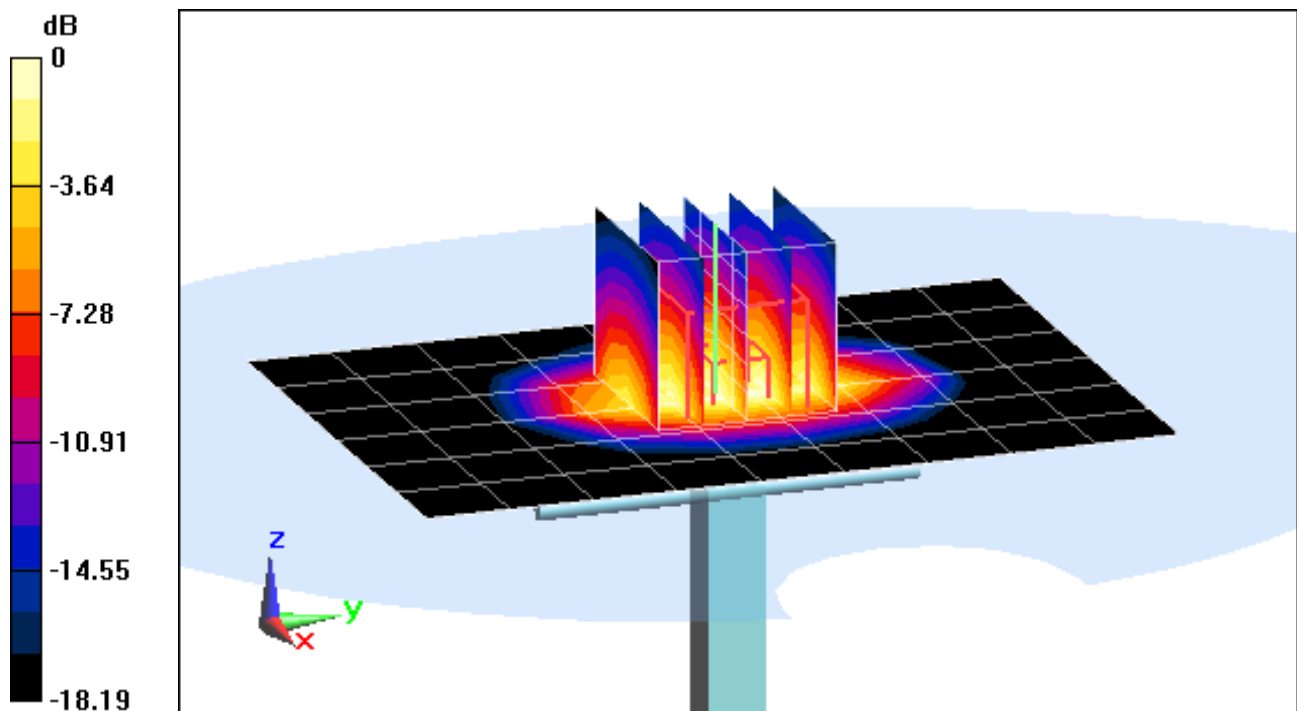

0 dB = 4.83 W/kg = 6.84 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head, Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.876 \text{ S/m}$ ;  $\epsilon_r = 37.925$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-18-2015; Ambient Temp: 20.2°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3318; ConvF(4.5, 4.5, 4.5); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 2450 MHz System Verification

**Area Scan (8x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 10.6 W/kg

**SAR(1 g) = 4.93 W/kg**

Deviation = -5.37%

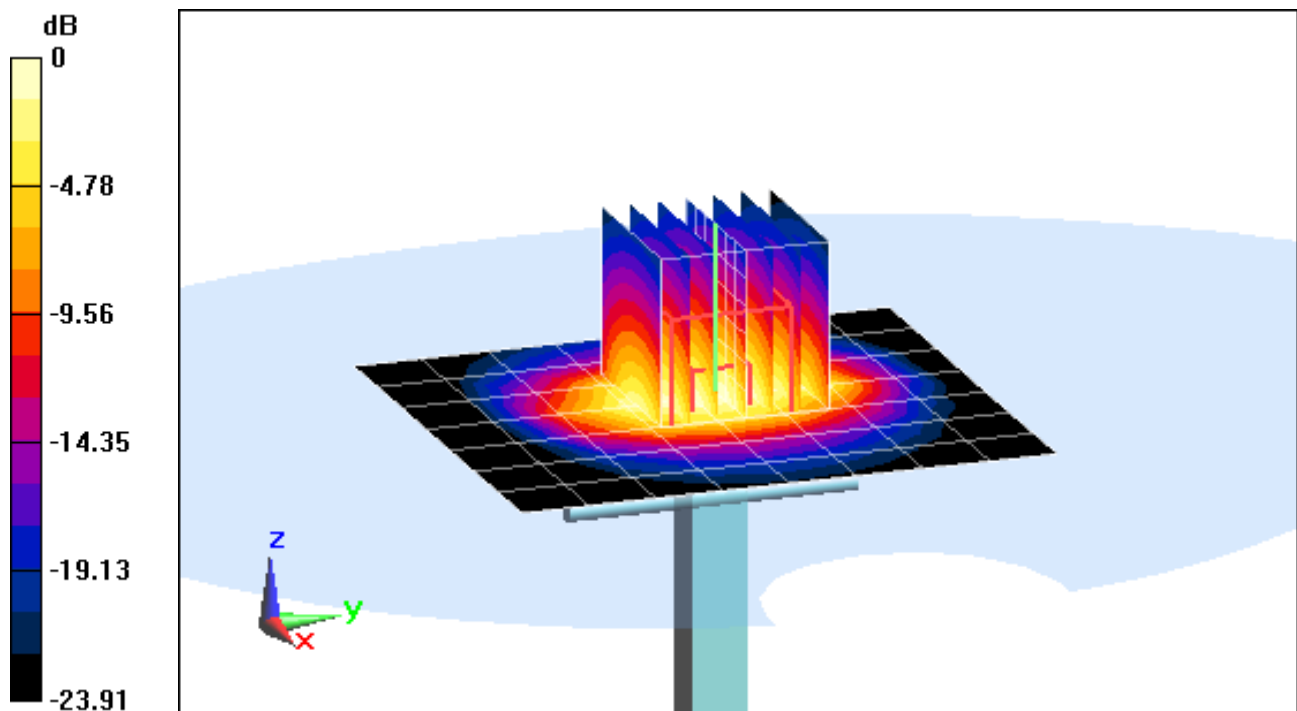

0 dB = 6.18 W/kg = 7.91 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1071**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600 Head, Medium parameters used:

$f = 2600 \text{ MHz}$ ;  $\sigma = 2.049 \text{ S/m}$ ;  $\epsilon_r = 37.249$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-18-2015; Ambient Temp: 22.3°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3318; ConvF(4.34, 4.34, 4.34); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 2600 MHz System Verification

**Area Scan (8x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 12.5 W/kg

**SAR(1 g) = 5.48 W/kg**

Deviation = -4.70%

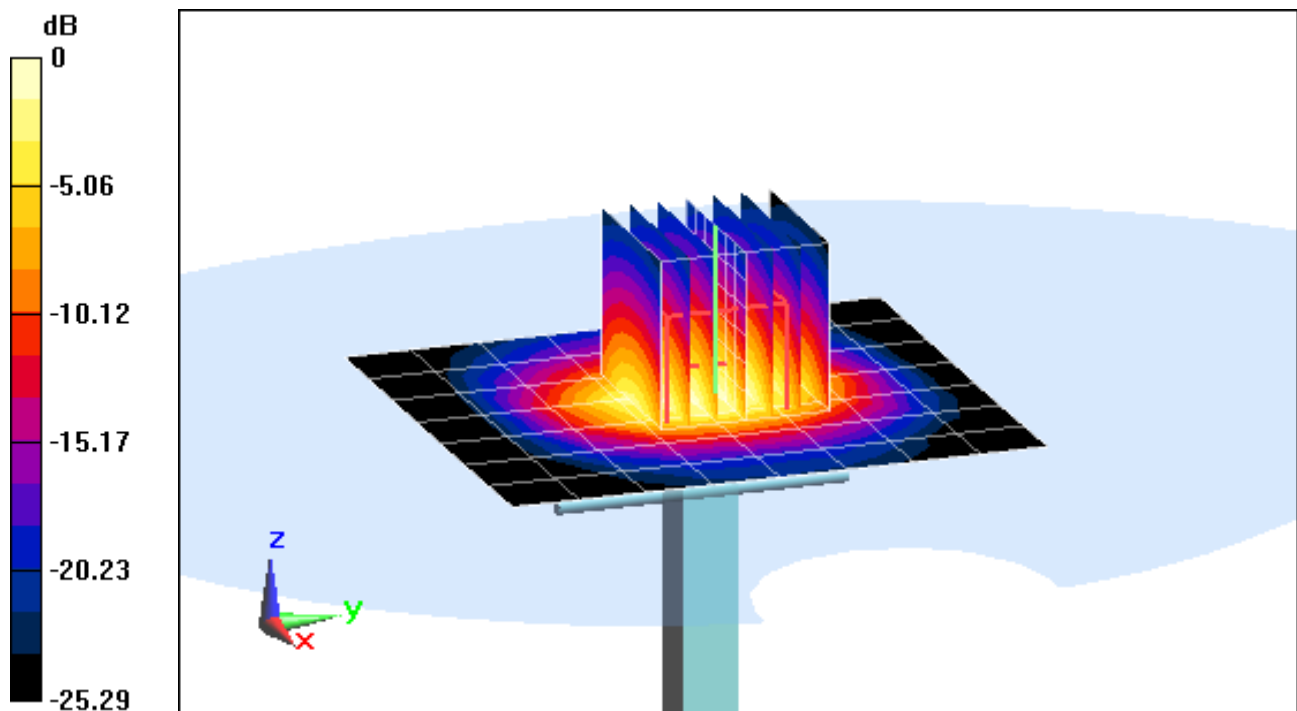

0 dB = 7.30 W/kg = 8.63 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5300 MHz; Type: D5GHzV2; Serial: 1120**

Communication System: UID 0, CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head, Medium parameters used:

$f = 5300 \text{ MHz}$ ;  $\sigma = 4.61 \text{ S/m}$ ;  $\epsilon_r = 36.319$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-26-2015; Ambient Temp: 21.7°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7357; ConvF(4.93, 4.93, 4.93); Calibrated: 4/23/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 5300 MHz System Verification

**Area Scan (7x8x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio: 1.4

Input Power = 17.0 dBm (50 mW)

Peak SAR (extrapolated) = 17.1 W/kg

**SAR(1 g) = 4.15 W/kg**

Deviation = 2.34%

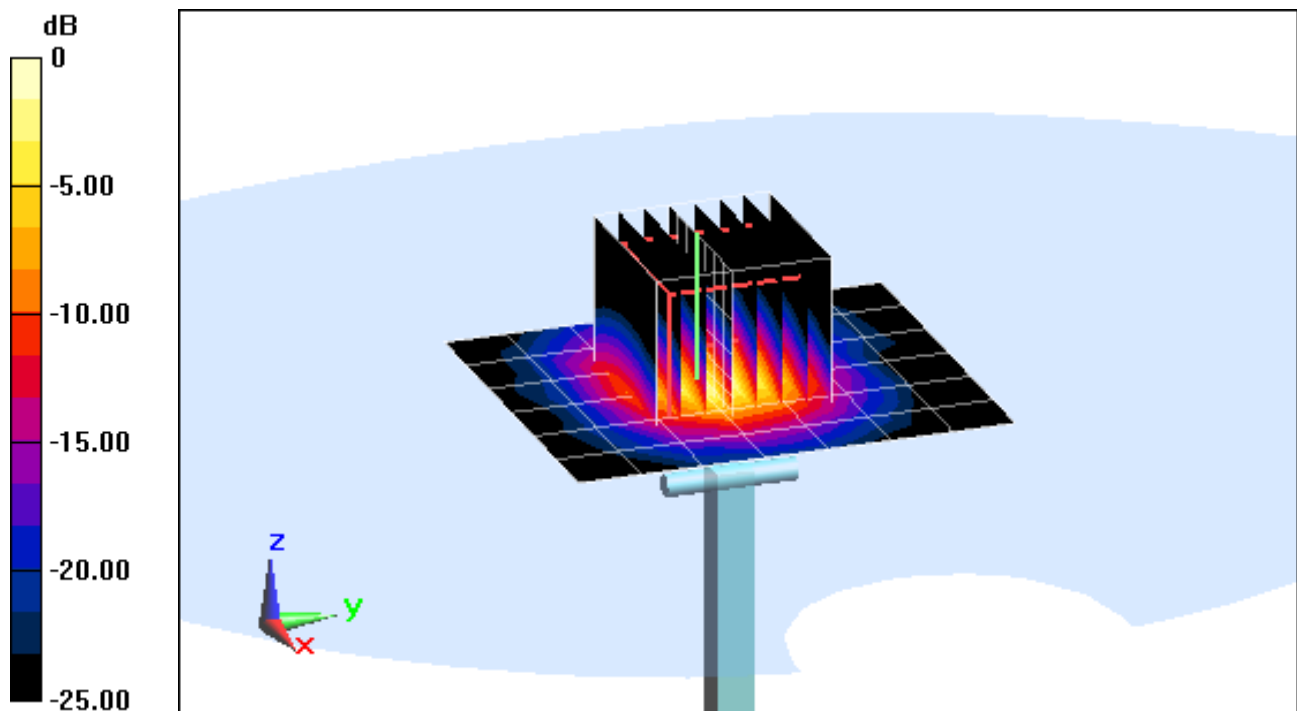

0 dB = 9.53 W/kg = 9.79 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1120**

Communication System: UID 0, CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head, Medium parameters used:

$f = 5500 \text{ MHz}$ ;  $\sigma = 4.823 \text{ S/m}$ ;  $\epsilon_r = 35.992$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-26-2015; Ambient Temp: 21.1°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7357; ConvF(4.7, 4.7, 4.7); Calibrated: 4/23/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 5500 MHz System Verification

**Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio: 1.4

Input Power = 17.0 dBm (50 mW)

Peak SAR (extrapolated) = 18.4 W/kg

**SAR(1 g) = 4.23 W/kg**

Deviation = 3.55%

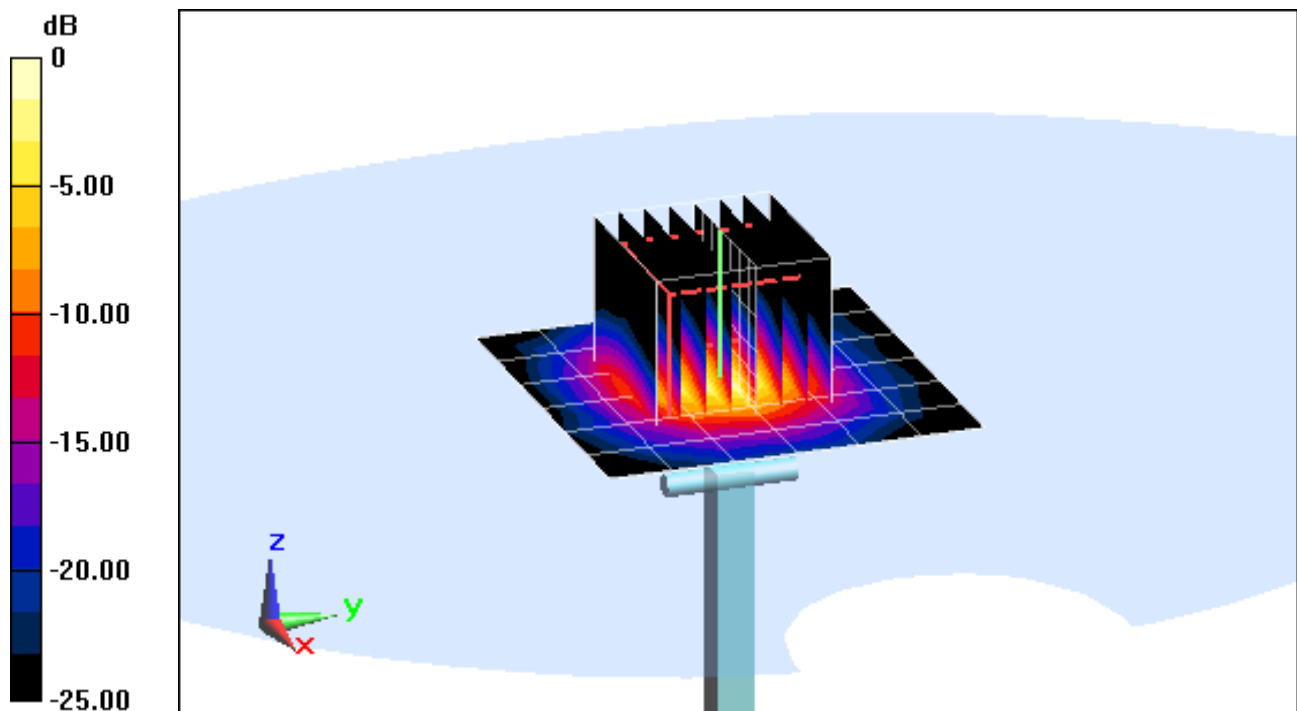

0 dB = 9.97 W/kg = 9.99 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1120**

Communication System: UID 0, CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head, Medium parameters used:

$f = 5800 \text{ MHz}$ ;  $\sigma = 5.154 \text{ S/m}$ ;  $\epsilon_r = 35.608$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-26-2015; Ambient Temp: 22.5°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7357; ConvF(4.41, 4.41, 4.41); Calibrated: 4/23/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 5800 MHz System Verification

**Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio: 1.4

Input Power = 17.0 dBm (50 mW)

Peak SAR (extrapolated) = 17.9 W/kg

**SAR(1 g) = 3.98 W/kg**

Deviation = 2.98%

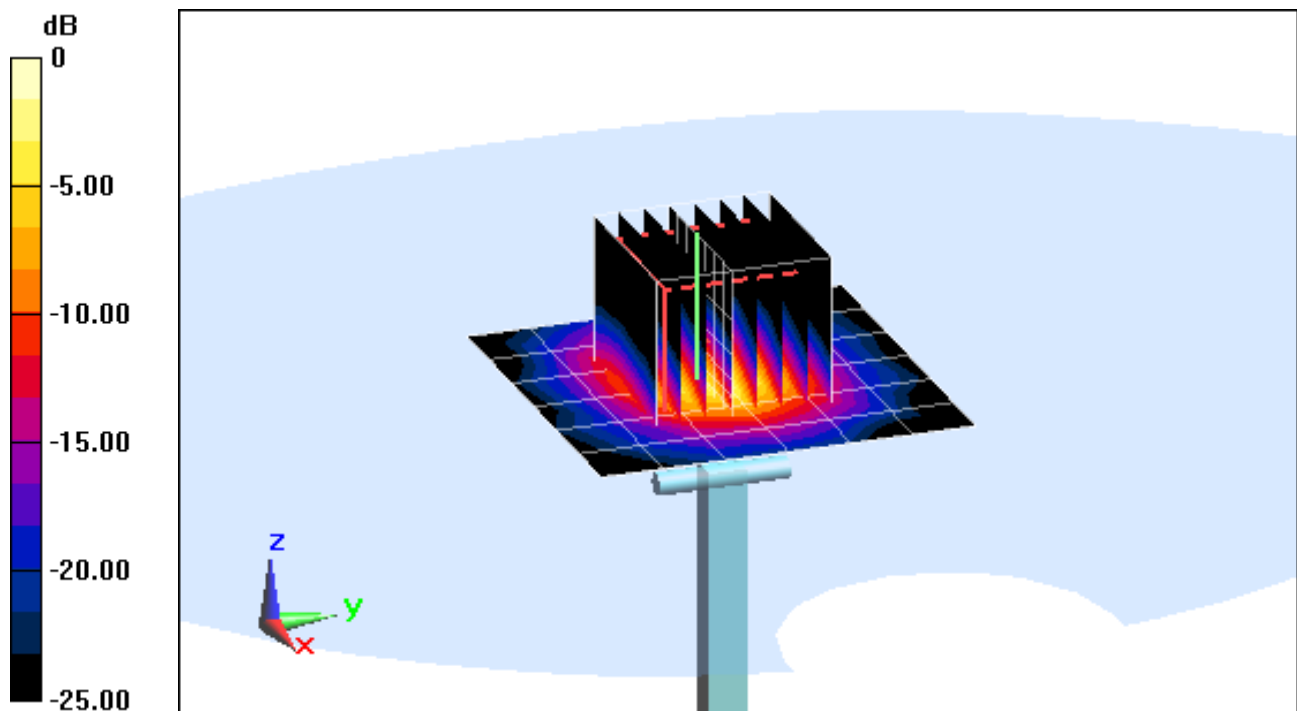

0 dB = 10.0 W/kg = 10.00 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body, Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 1 \text{ S/m}$ ;  $\epsilon_r = 53.751$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-20-2015; Ambient Temp: 21.1°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3209; ConvF(6.07, 6.07, 6.07); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 835 MHz System Verification

**Area Scan (7x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 0.997 W/kg**

Deviation = 9.08%

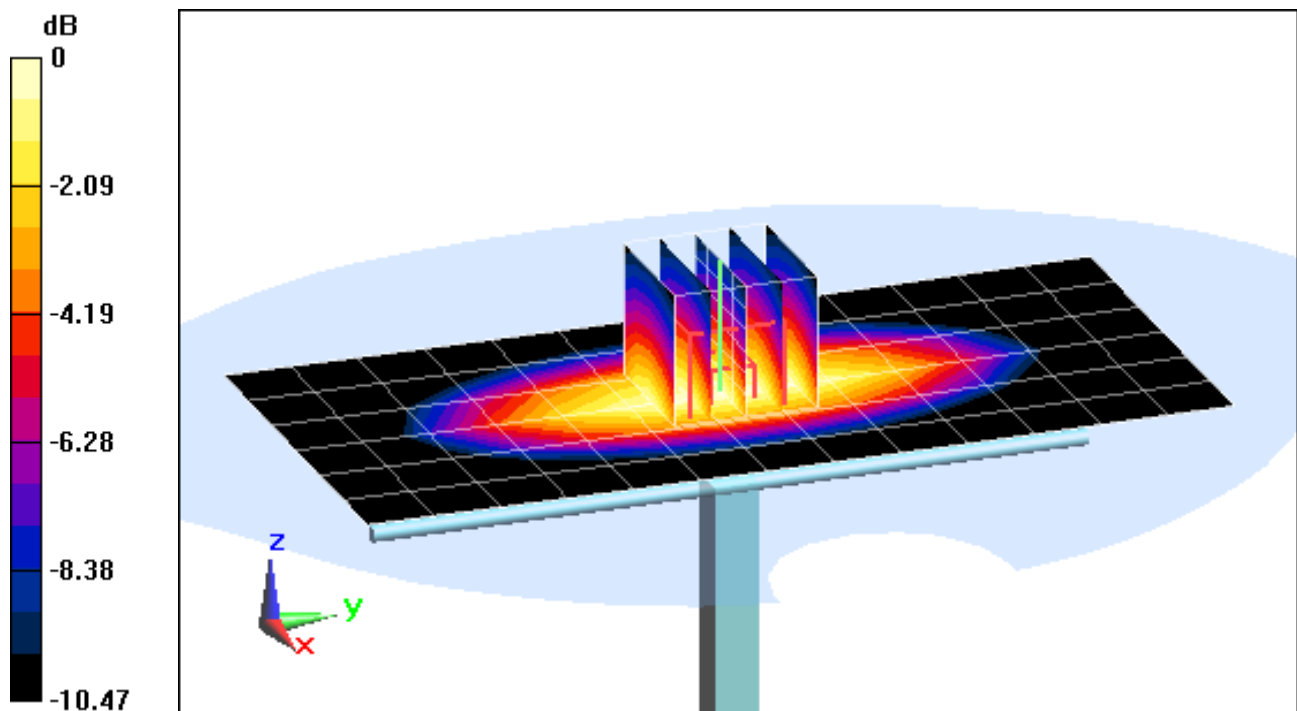

0 dB = 1.17 W/kg = 0.68 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body, Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 1.018 \text{ S/m}$ ;  $\epsilon_r = 53.93$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-26-2015; Ambient Temp: 22.3°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(6.23, 6.23, 6.23); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:2027

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 835 MHz System Verification

**Area Scan (7x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.878 W/kg**

Deviation = -6.10%

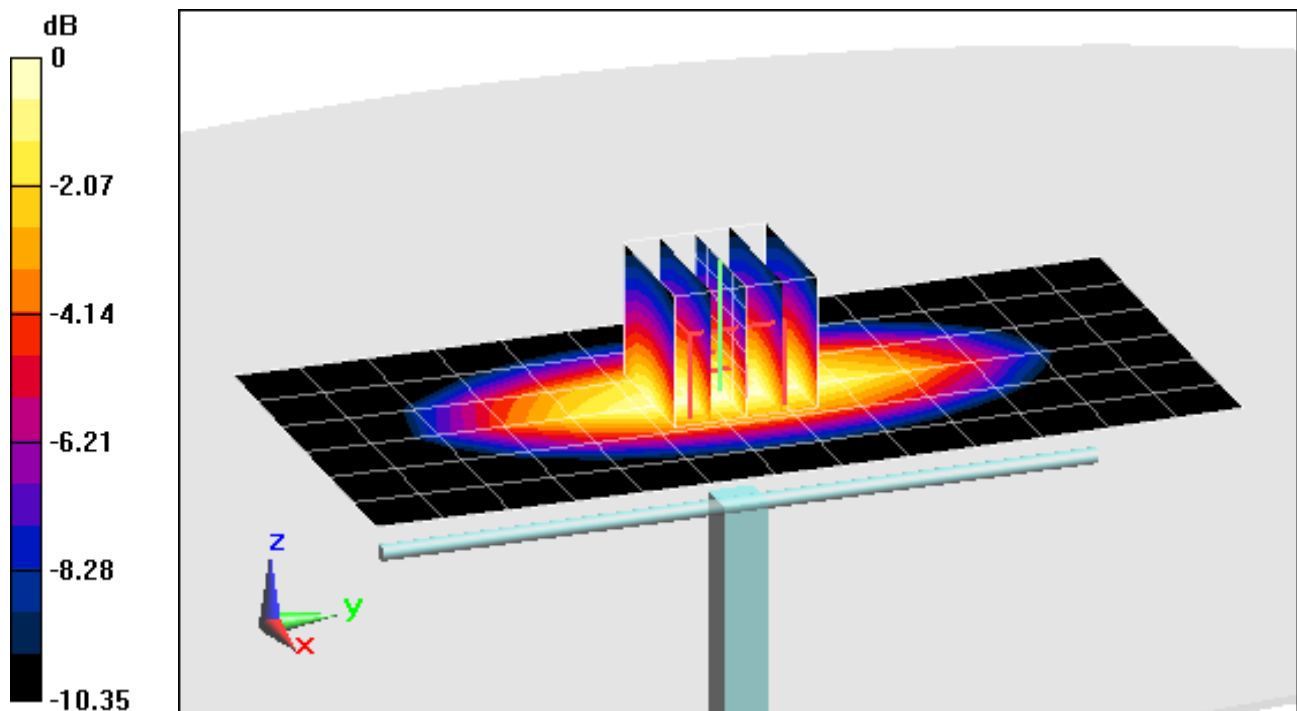

0 dB = 1.03 W/kg = 0.13 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d141**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body, Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.563 \text{ S/m}$ ;  $\epsilon_r = 51.185$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-18-2015; Ambient Temp: 21.1°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3258; ConvF(4.64, 4.64, 4.64); Calibrated: 2/27/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/18/2015

Phantom: ELI Front; Type: QDOVA002AA; Serial: TP:1202

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 1900 MHz System Verification

**Area Scan (7x10x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 6.84 W/kg

**SAR(1 g) = 3.87 W/kg**

Deviation = -3.25%

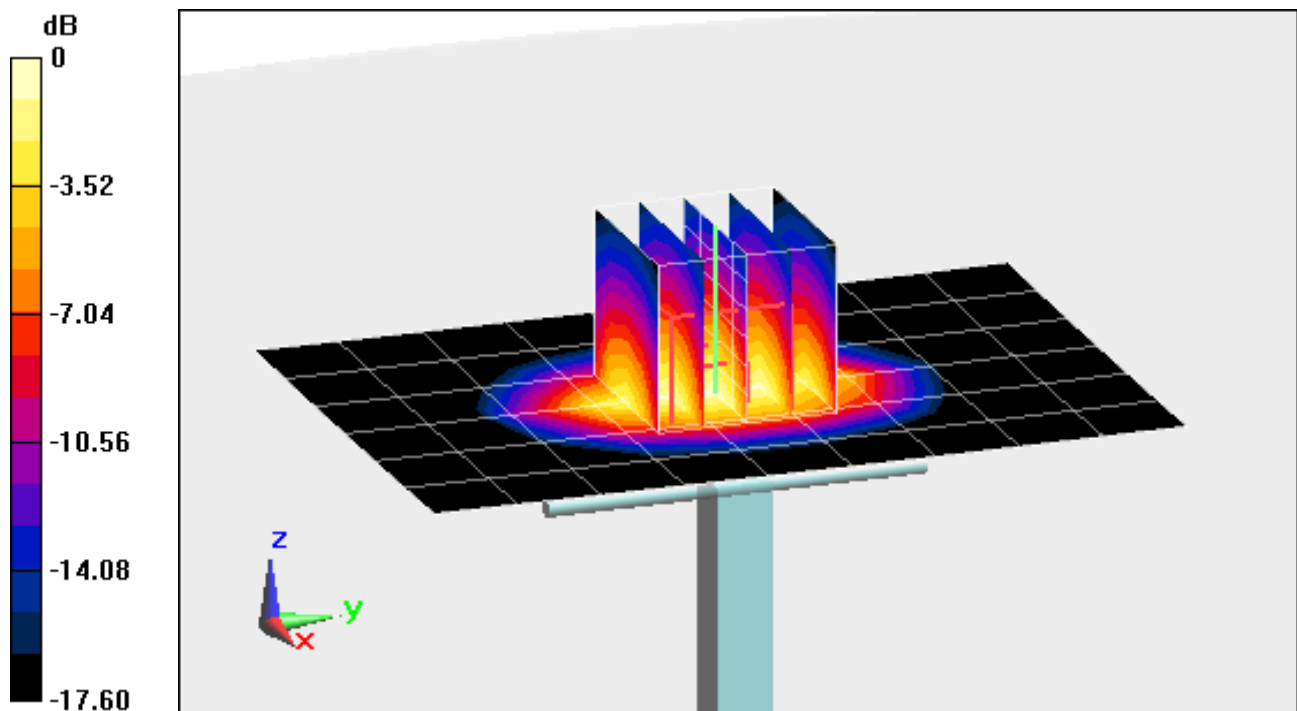

0 dB = 4.90 W/kg = 6.90 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body, Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.993 \text{ S/m}$ ;  $\epsilon_r = 51.007$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-18-2015; Ambient Temp: 21.9°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3332; ConvF(4.31, 4.31, 4.31); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 2450 MHz System Verification

**Area Scan (8x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 10.4 W/kg

**SAR(1 g) = 5.03 W/kg**

Deviation = -2.90%

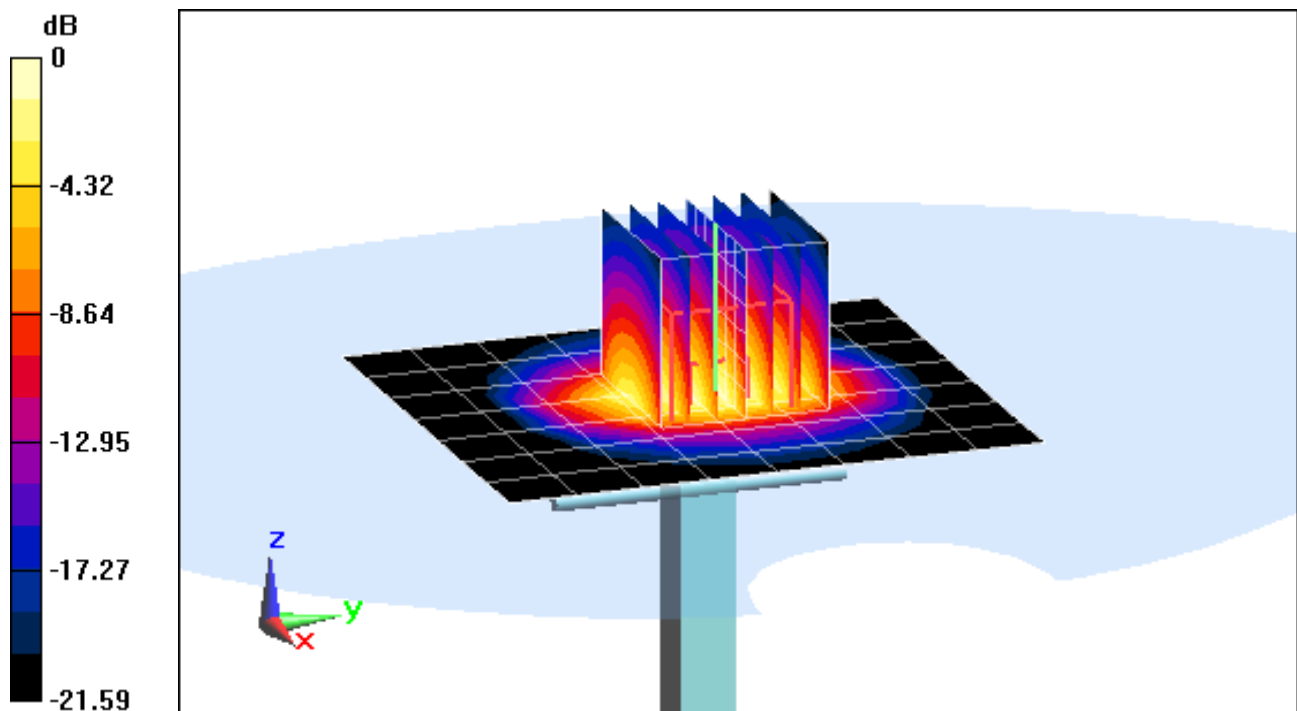

0 dB = 6.61 W/kg = 8.20 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1071**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600 Body, Medium parameters used:

$f = 2600 \text{ MHz}$ ;  $\sigma = 2.175 \text{ S/m}$ ;  $\epsilon_r = 50.696$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-14-2015; Ambient Temp: 22.8°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3332; ConvF(4.11, 4.11, 4.11); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 2600 MHz System Verification

**Area Scan (8x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 13.1 W/kg

**SAR(1 g) = 5.66 W/kg**

Deviation = -0.53%

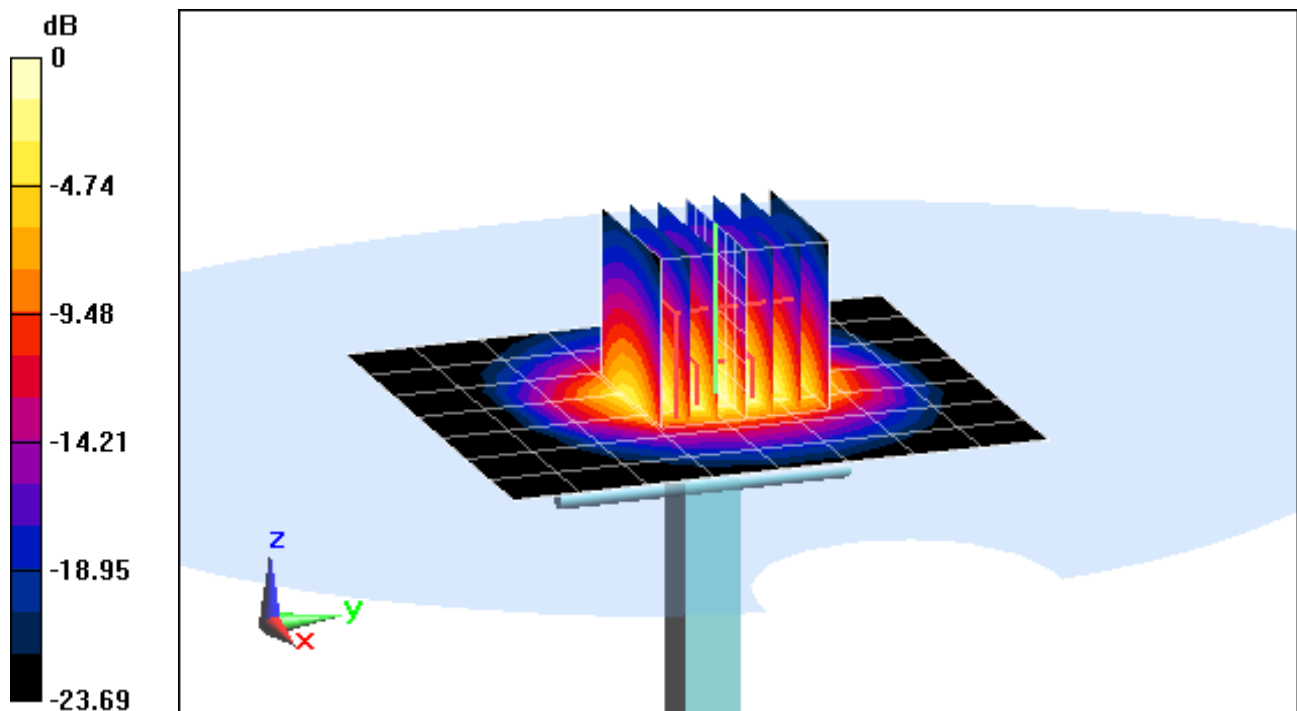

0 dB = 7.53 W/kg = 8.77 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5300 MHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body, Medium parameters used:

$f = 5300 \text{ MHz}$ ;  $\sigma = 5.516 \text{ S/m}$ ;  $\epsilon_r = 47.016$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-18-2015; Ambient Temp: 24.3°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3914; ConvF(4.33, 4.33, 4.33); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 5300 MHz System Verification

**Area Scan (7x9x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio: 1.4

Input Power = 17.0 dBm (50 mW)

Peak SAR (extrapolated) = 17.7 W/kg

**SAR(1 g) = 4.21 W/kg; SAR(10 g) = 1.16 W/kg**

Deviation (1g) = 5.38%; Deviation (10g) = 4.04%

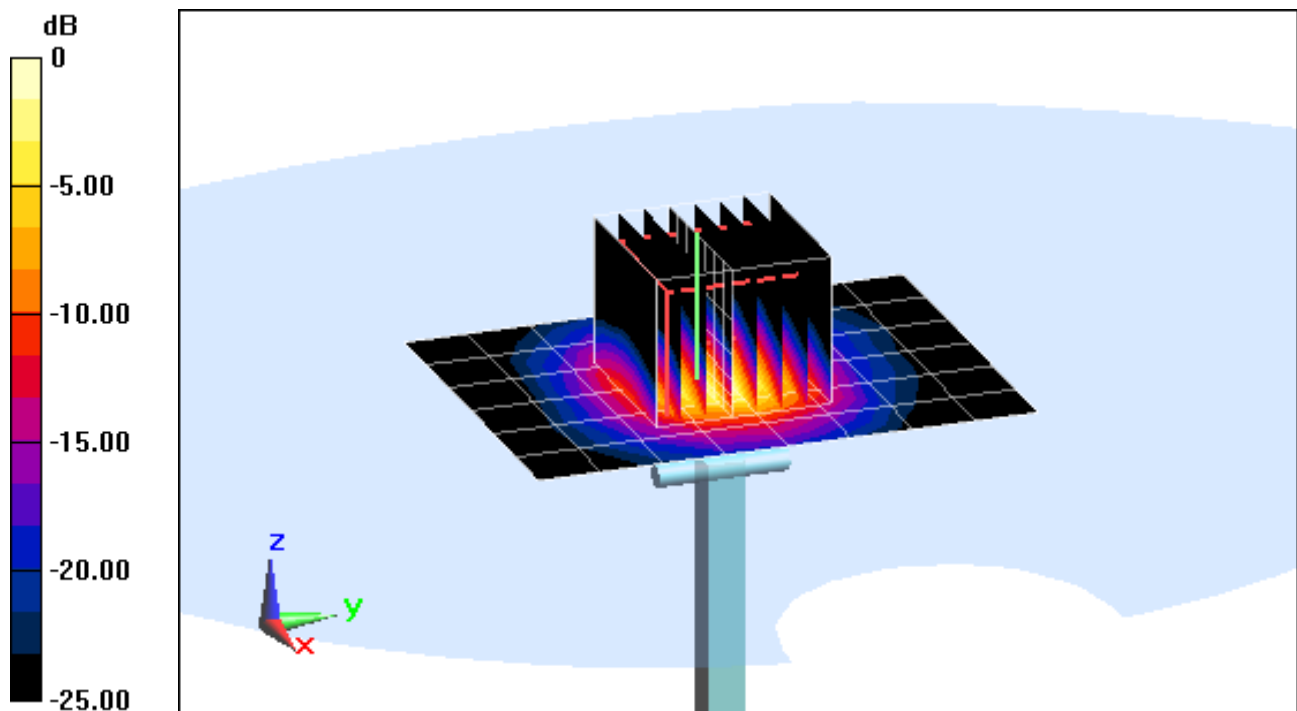

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body, Medium parameters used:

$f = 5500 \text{ MHz}$ ;  $\sigma = 5.764 \text{ S/m}$ ;  $\epsilon_r = 46.669$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-18-2015; Ambient Temp: 24.2°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3914; ConvF(3.91, 3.91, 3.91); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 5500 MHz System Verification

**Area Scan (7x9x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio: 1.4

Input Power = 17.0 dBm (50 mW)

Peak SAR (extrapolated) = 18.7 W/kg

**SAR(1 g) = 4.37 W/kg; SAR(10 g) = 1.20 W/kg**

Deviation (1g) = 5.17%; Deviation (10g) = 4.35%

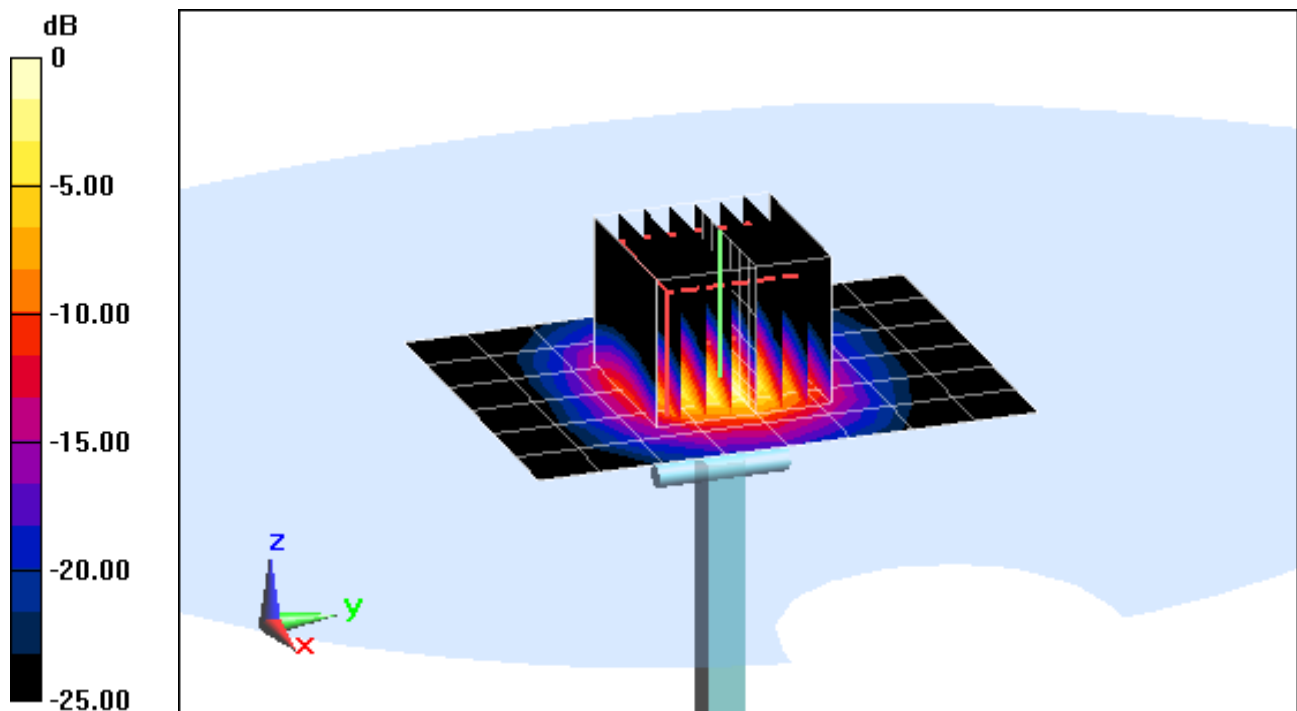

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body, Medium parameters used:

$f = 5800 \text{ MHz}$ ;  $\sigma = 6.196 \text{ S/m}$ ;  $\epsilon_r = 46.241$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-18-2015; Ambient Temp: 24.2°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN3914; ConvF(4.01, 4.01, 4.01); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

## 5800 MHz System Verification

**Area Scan (7x9x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio: 1.4

Input Power = 17.0 dBm (50 mW)

Peak SAR (extrapolated) = 17.9 W/kg

**SAR(1 g) = 3.97 W/kg**

Deviation = 1.79%

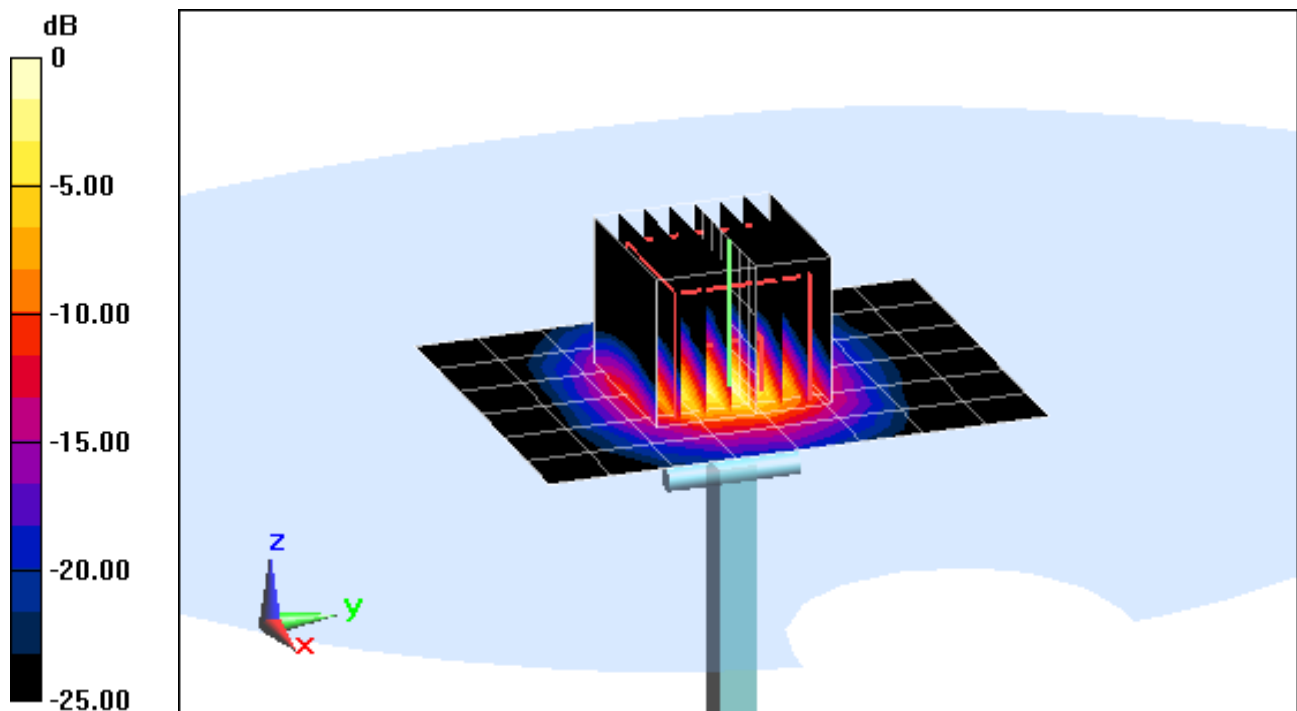

0 dB = 10.0 W/kg = 10.00 dBW/kg

## APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D835V2-4d133\_Jul14**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d133**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

CC  
W/CM

Calibration date: **July 24, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)     | Scheduled Calibration |
|-----------------------------|--------------------|--------------------------------|-----------------------|
| Power meter EPM-442A        | GB37480704         | 09-Oct-13 (No. 217-01827)      | Oct-14                |
| Power sensor HP 8481A       | US37292783         | 09-Oct-13 (No. 217-01827)      | Oct-14                |
| Power sensor HP 8481A       | MY41092317         | 09-Oct-13 (No. 217-01828)      | Oct-14                |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 03-Apr-14 (No. 217-01918)      | Apr-15                |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 03-Apr-14 (No. 217-01921)      | Apr-15                |
| Reference Probe ES3DV3      | SN: 3205           | 30-Dec-13 (No. ES3-3205_Dec13) | Dec-14                |
| DAE4                        | SN: 601            | 30-Apr-14 (No. DAE4-601_Apr14) | Apr-15                |

| Secondary Standards       | ID #             | Check Date (in house)             | Scheduled Check        |
|---------------------------|------------------|-----------------------------------|------------------------|
| RF generator R&S SMT-06   | 100005           | 04-Aug-99 (in house check Oct-13) | In house check: Oct-16 |
| Network Analyzer HP 8763E | US37390585 S4206 | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

Calibrated by: **Name** **Function**  
**Jeton Kastrali** **Laboratory Technician**

Signature

Approved by: **Name** **Technical Manager**  
**Katja Pokovic**

Issued: July 24, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.8.8     |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 15 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 835 MHz $\pm$ 1 MHz    |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 41.5           | 0.90 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 41.1 $\pm$ 6 % | 0.94 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 2.38 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 9.20 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 1.53 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 5.96 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 55.2           | 0.97 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 53.8 $\pm$ 6 % | 1.02 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 2.44 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 9.35 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 1.59 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 6.15 W/kg $\pm$ 16.5 % (k=2) |

## Appendix (Additional assessments outside the scope of SCS108)

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.6 $\Omega$ - 1.0 j $\Omega$ |
| Return Loss                          | - 34.7 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.8 $\Omega$ - 3.3 j $\Omega$ |
| Return Loss                          | - 27.8 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.395 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |               |
|-----------------|---------------|
| Manufactured by | SPEAG         |
| Manufactured on | July 22, 2011 |

## DASY5 Validation Report for Head TSL

Date: 24.07.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d133**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.94 \text{ S/m}$ ;  $\epsilon_r = 41.1$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.22, 6.22, 6.22); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Dipole Calibration for Head Tissue/Pin=250 mW,  $d=15\text{mm}$ /Zoom Scan (7x7x7)/Cube 0:**


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 56.07 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.58 W/kg

**SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.53 W/kg**


Maximum value of SAR (measured) = 2.79 W/kg

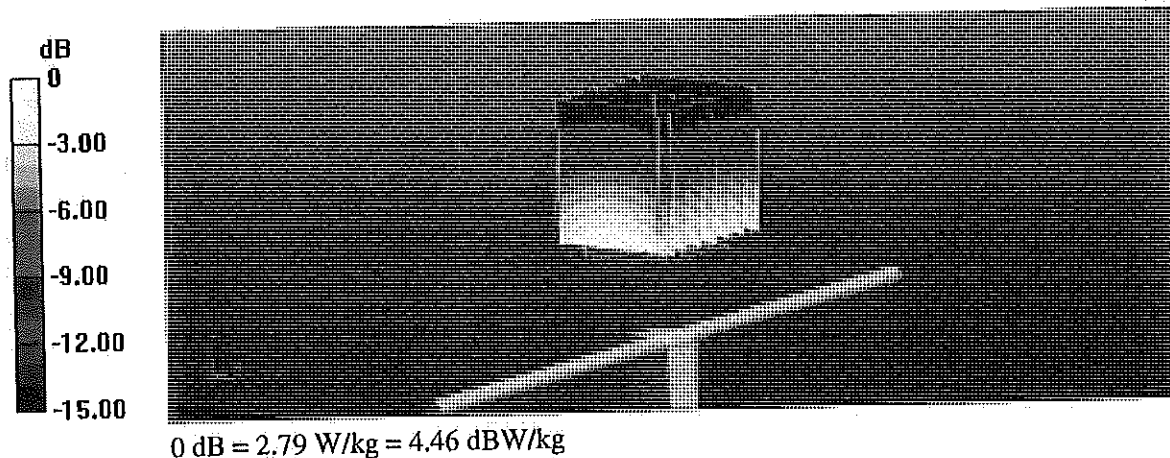

# Impedance Measurement Plot for Head TSL


24 Jul 2014 11:33:11  
 [CH1] S11 1 UFS 2: 51.553  $\Omega$  -1.0293  $\Omega$  105.19 pF 835.000 000 MHz

#  
 Del  
 CA

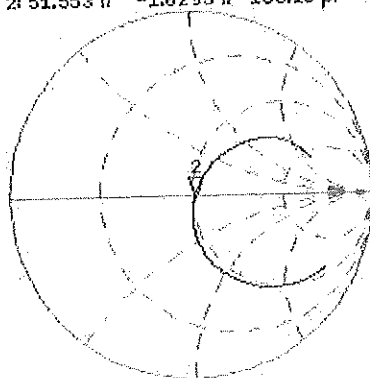

avg  
 16

H1d

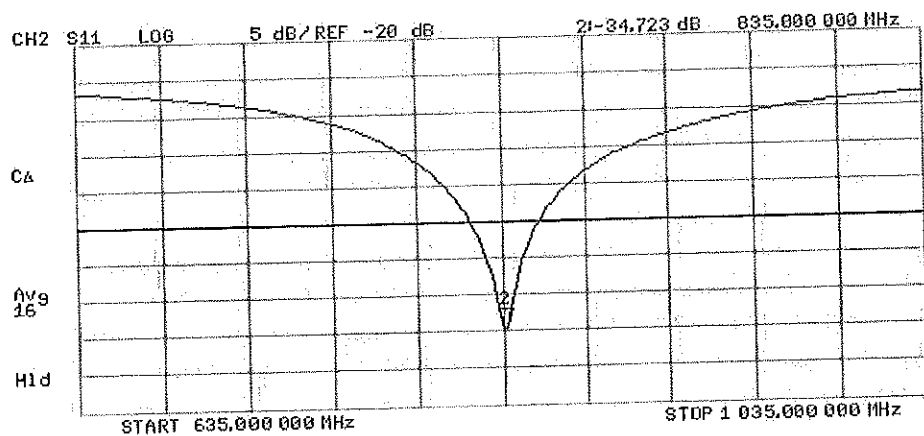

## DASY5 Validation Report for Body TSL

Date: 17.07.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d133**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835$  MHz;  $\sigma = 1.02$  S/m;  $\epsilon_r = 53.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.09, 6.09, 6.09); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.61 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.59 W/kg


**SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.59 W/kg**

Maximum value of SAR (measured) = 2.84 W/kg

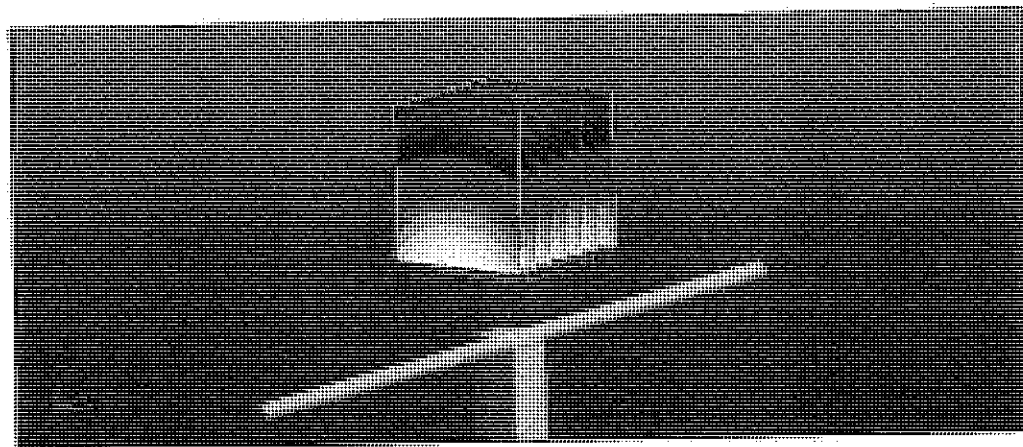

0 dB = 2.84 W/kg = 4.53 dBW/kg

# Impedance Measurement Plot for Body TSL

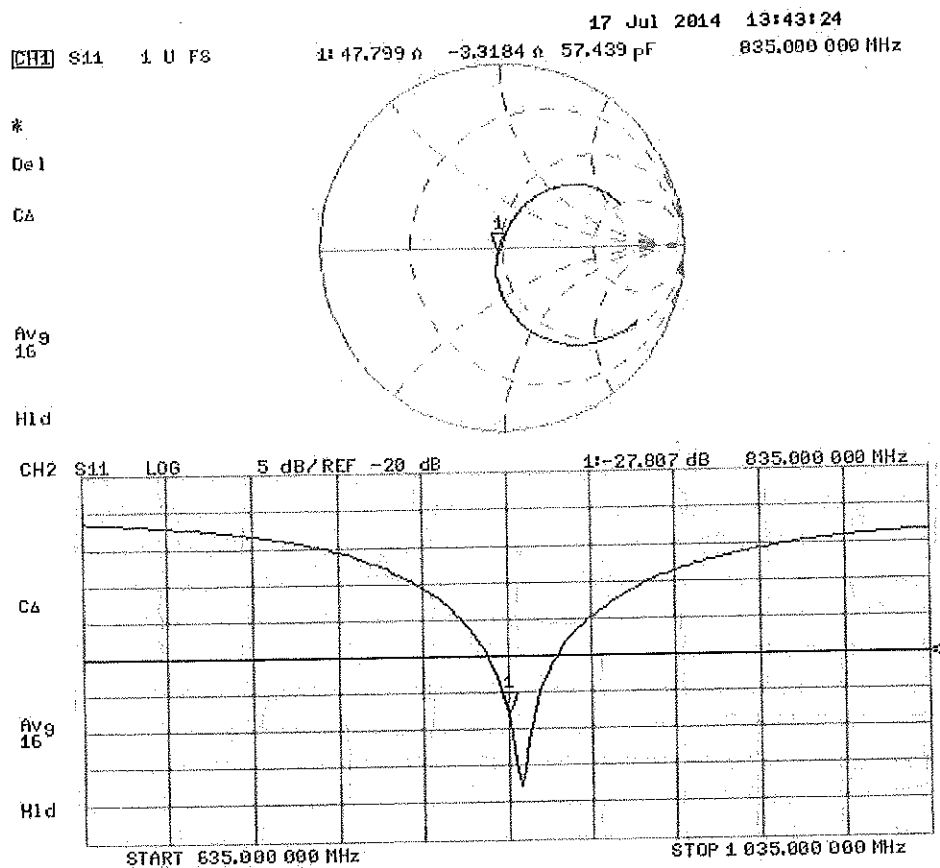



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D1900V2-5d149\_Jul14**

## CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d149**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

CC  
 11/5/14

Calibration date: **July 23, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 09-Oct-13 (No. 217-01827)         | Oct-14                 |
| Power sensor HP 8481A       | US37292783         | 09-Oct-13 (No. 217-01827)         | Oct-14                 |
| Power sensor HP 8481A       | MY41092317         | 09-Oct-13 (No. 217-01828)         | Oct-14                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 03-Apr-14 (No. 217-01918)         | Apr-15                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 03-Apr-14 (No. 217-01921)         | Apr-15                 |
| Reference Probe ES3DV3      | SN: 3205           | 30-Dec-13 (No. ES3-3205_Dec13)    | Dec-14                 |
| DAE4                        | SN: 601            | 30-Apr-14 (No. DAE4-601_Apr14)    | Apr-15                 |
| Secondary Standards         | ID #               | Check Date (In house)             | Scheduled Check        |
| RF generator R&S SMT-06     | 100005             | 04-Aug-99 (In house check Oct-13) | In house check: Oct-16 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (In house check Oct-13) | In house check: Oct-14 |

|                |                        |                                   |               |
|----------------|------------------------|-----------------------------------|---------------|
| Calibrated by: | Name<br>Jeton Kastrati | Function<br>Laboratory Technician | Signature<br> |
| Approved by:   | Katja Pokovic          | Technical Manager                 |               |

Issued: July 23, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.8.8     |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 10 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 1900 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         |                     |                |                      |
|-----------------------------------------|---------------------|----------------|----------------------|
|                                         | Temperature         | Permittivity   | Conductivity         |
| Nominal Head TSL parameters             | 22.0 °C             | 40.0           | 1.40 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 39.5 $\pm$ 6 % | 1.38 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 10.0 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 40.2 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 5.24 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 21.0 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         |                     |                |                      |
|-----------------------------------------|---------------------|----------------|----------------------|
|                                         | Temperature         | Permittivity   | Conductivity         |
| Nominal Body TSL parameters             | 22.0 °C             | 53.3           | 1.52 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 52.5 $\pm$ 6 % | 1.51 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 10.1 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 40.4 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 5.33 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 21.3 W/kg $\pm$ 16.5 % (k=2) |

## Appendix (Additional assessments outside the scope of SCS108)

### Antenna Parameters with Head TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $52.6 \Omega + 5.5 j\Omega$ |
| Return Loss                          | - 24.6 dB                   |

### Antenna Parameters with Body TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $48.8 \Omega + 6.1 j\Omega$ |
| Return Loss                          | - 24.0 dB                   |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.197 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                |
|-----------------|----------------|
| Manufactured by | SPEAG          |
| Manufactured on | March 11, 2011 |

## DASY5 Validation Report for Head TSL

Date: 23.07.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d149**

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.38 \text{ S/m}$ ;  $\epsilon_r = 39.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.06, 5.06, 5.06); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 100I
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Dipole Calibration for Head Tissue/Pin=250 mW,  $d=10\text{mm}$ /Zoom Scan (7x7x7)/Cube 0:**


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 98.92 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 18.4 W/kg

**SAR(1 g) = 10 W/kg; SAR(10 g) = 5.24 W/kg**


Maximum value of SAR (measured) = 12.8 W/kg

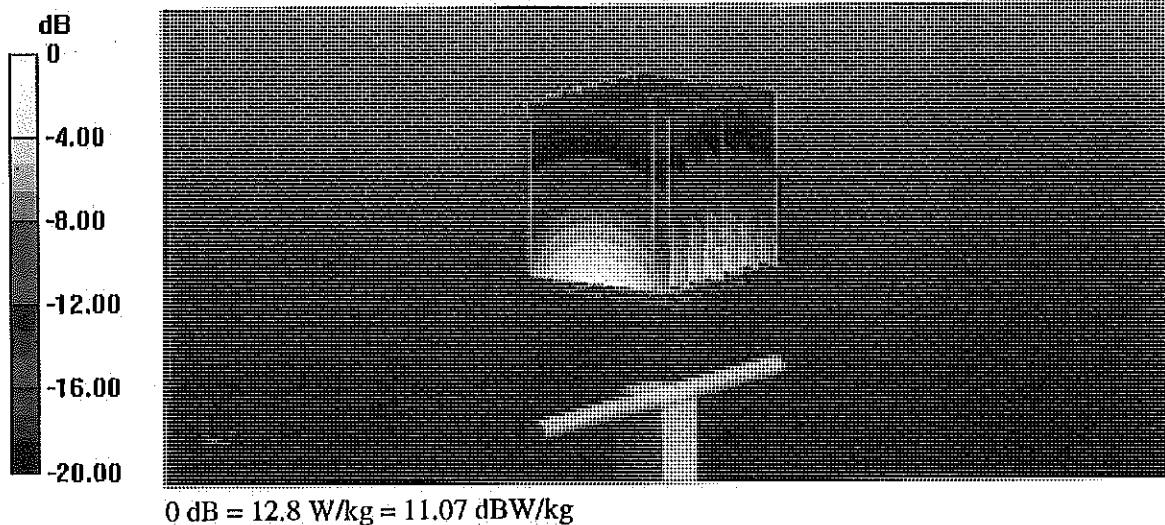

# Impedance Measurement Plot for Head TSL

23 Jul 2014 10:46:05  
 [CH1] S11 1 U FS 1: 52.600  $\Omega$  5.4570  $\Omega$  457.11 pH 1 900.000 000 MHz

\*  
 Del  
 Cor

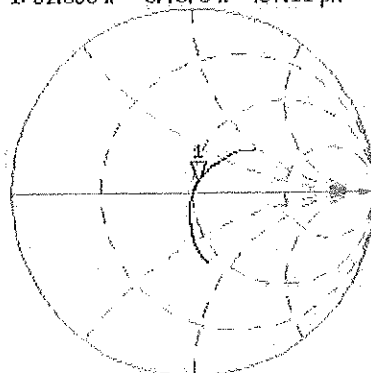

Avg  
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -24.600 dB 1 900.000 000 MHz

Cor

Avg  
 16

H1d

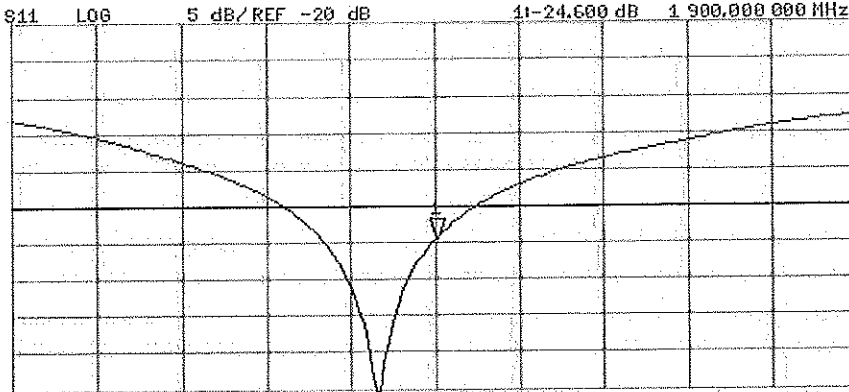

## DASY5 Validation Report for Body TSL

Date: 23.07.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d149**

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.51$  S/m;  $\epsilon_r = 52.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.76, 4.76, 4.76); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.83 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 17.6 W/kg

**SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.33 W/kg**


Maximum value of SAR (measured) = 12.8 W/kg

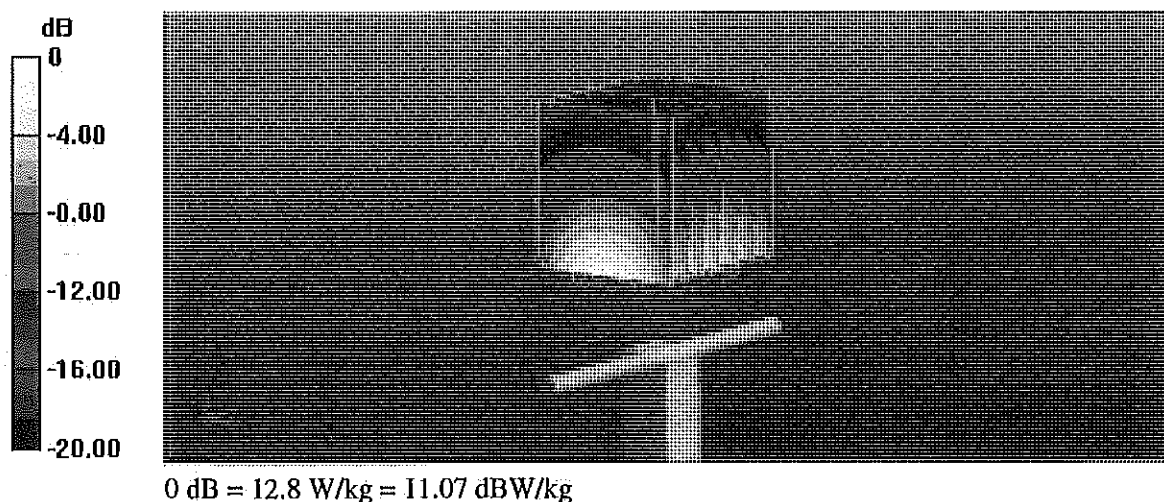

# Impedance Measurement Plot for Body TSL

23 Jul 2014 10:45:45  
 CH1 S11 1 U FS 1: 48.789  $\Omega$  6.1426  $\Omega$  514.54  $\mu\text{H}$  1 900.000 000 MHz

\*  
 Del  
 Cor

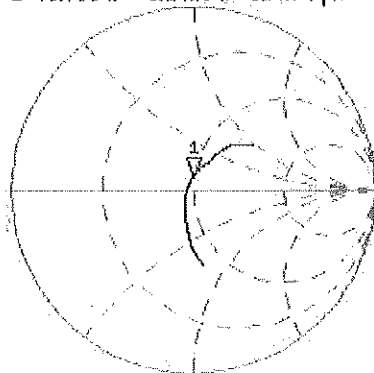

Avg  
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -23.974 dB 1 900.000 000 MHz

Cor

Avg  
 16

H1d

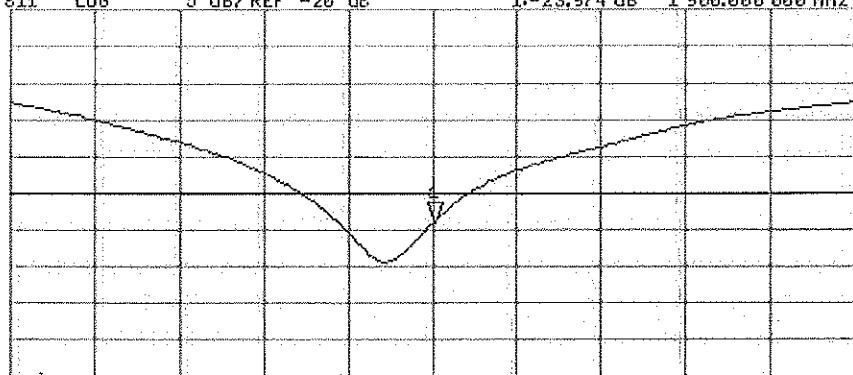

START 1 700.000 000 MHz

STOP 2 100.000 000 MHz



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D2450V2-719\_Aug14**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 719**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **August 11, 2014**

✓ KOK  
9/8/14

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 09-Oct-13 (No. 217-01827)         | Oct-14                 |
| Power sensor HP 8481A       | US37292783         | 09-Oct-13 (No. 217-01827)         | Oct-14                 |
| Power sensor HP 8481A       | MY41092317         | 09-Oct-13 (No. 217-01828)         | Oct-14                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 03-Apr-14 (No. 217-01918)         | Apr-15                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 03-Apr-14 (No. 217-01921)         | Apr-15                 |
| Reference Probe ES3DV3      | SN: 3205           | 30-Dec-13 (No. ES3-3205_Dec13)    | Dec-14                 |
| DAE4                        | SN: 601            | 30-Apr-14 (No. DAE4-601_Apr14)    | Apr-15                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| RF generator R&S SMT-06     | 100005             | 04-Aug-99 (in house check Oct-13) | In house check: Oct-16 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

Calibrated by: **Michael Weber** Function: **Laboratory Technician**

Signature

*M. Weber*

Approved by: **Katja Pokovic** Technical Manager

*Katja Pokovic*

Issued: August 12, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                        |             |
|-------------------------------------|------------------------|-------------|
| <b>DASY Version</b>                 | DASY5                  | V52.8.8     |
| <b>Extrapolation</b>                | Advanced Extrapolation |             |
| <b>Phantom</b>                      | Modular Flat Phantom   |             |
| <b>Distance Dipole Center - TSL</b> | 10 mm                  | with Spacer |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm      |             |
| <b>Frequency</b>                    | 2450 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C             | 39.2           | 1.80 mho/m           |
| <b>Measured Head TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 38.0 $\pm$ 6 % | 1.82 mho/m $\pm$ 6 % |
| <b>Head TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                                |
|-------------------------------------------------------------|--------------------|------------------------------------------------|
| SAR measured                                                | 250 mW input power | 13.2 W/kg                                      |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>52.1 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                                |
|---------------------------------------------------------------|--------------------|------------------------------------------------|
| SAR measured                                                  | 250 mW input power | 6.09 W/kg                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>24.2 W/kg <math>\pm</math> 16.5 % (k=2)</b> |

## Body TSL parameters

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Body TSL parameters</b>             | 22.0 °C             | 52.7           | 1.95 mho/m           |
| <b>Measured Body TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 50.5 $\pm$ 6 % | 2.02 mho/m $\pm$ 6 % |
| <b>Body TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | Condition          |                                                |
|-------------------------------------------------------------|--------------------|------------------------------------------------|
| SAR measured                                                | 250 mW input power | 13.3 W/kg                                      |
| SAR for nominal Body TSL parameters                         | normalized to 1W   | <b>51.8 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |                                                |
|---------------------------------------------------------------|--------------------|------------------------------------------------|
| SAR measured                                                  | 250 mW input power | 6.10 W/kg                                      |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>24.0 W/kg <math>\pm</math> 16.5 % (k=2)</b> |

## Appendix (Additional assessments outside the scope of SCS108)

### Antenna Parameters with Head TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $54.9 \Omega + 3.0 j\Omega$ |
| Return Loss                          | - 25.2 dB                   |

### Antenna Parameters with Body TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $50.9 \Omega + 5.8 j\Omega$ |
| Return Loss                          | - 24.7 dB                   |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.149 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                    |
|-----------------|--------------------|
| Manufactured by | SPEAG              |
| Manufactured on | September 10, 2002 |

## DASY5 Validation Report for Head TSL

Date: 11.08.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 719**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.82$  S/m;  $\epsilon_r = 38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.6 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 27.5 W/kg

**SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.09 W/kg**

Maximum value of SAR (measured) = 17.4 W/kg

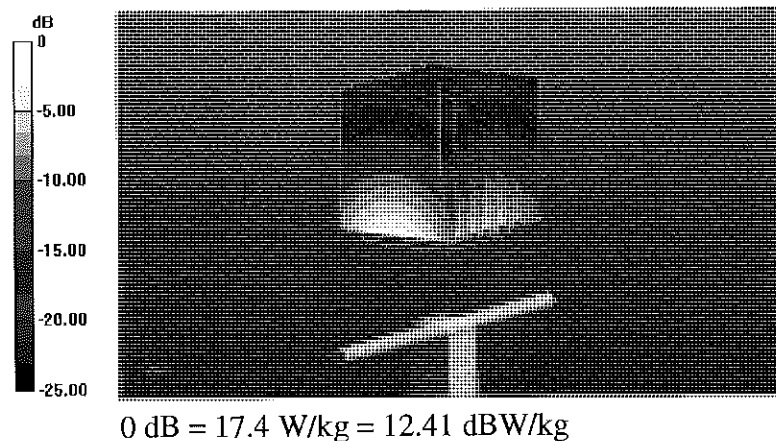

# Impedance Measurement Plot for Head TSL

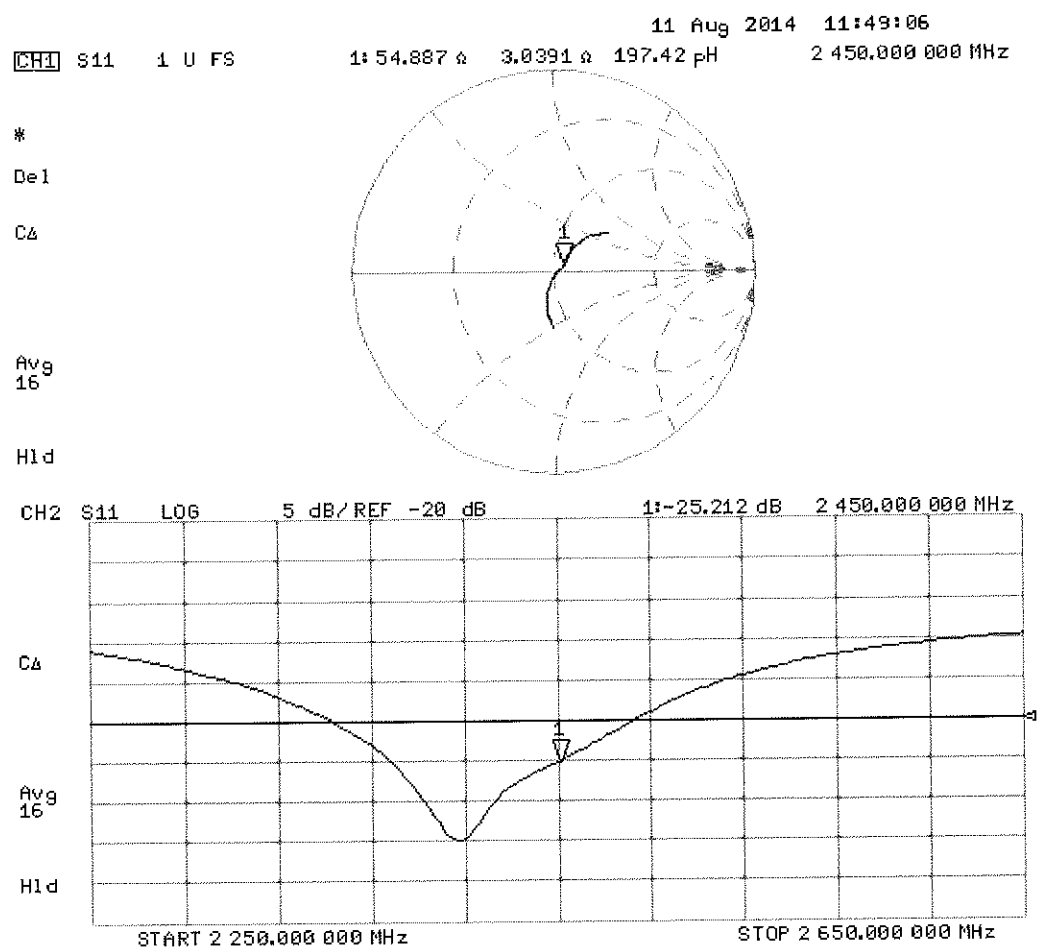

## DASY5 Validation Report for Body TSL

Date: 11.08.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 719**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.02$  S/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.35, 4.35, 4.35); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### **Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.08 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 27.9 W/kg

**SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.1 W/kg**

Maximum value of SAR (measured) = 17.6 W/kg

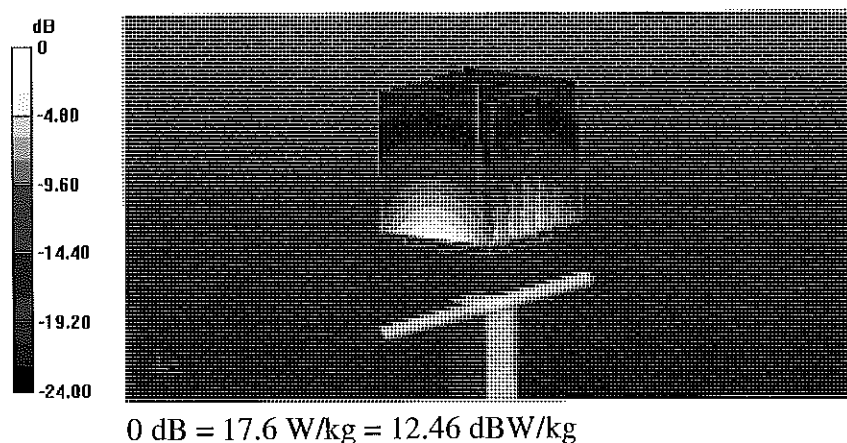

Impedance Measurement Plot for Body TSL

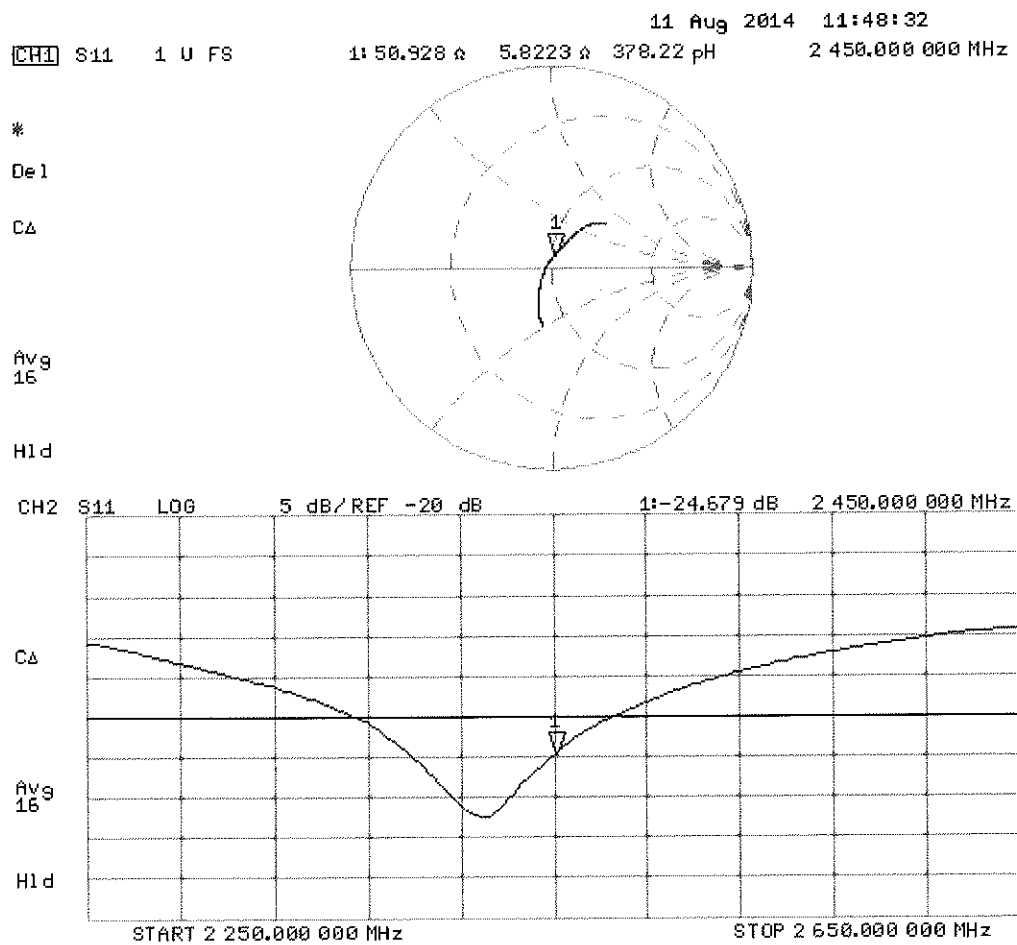



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D2600V2-1071\_Oct14**

## CALIBRATION CERTIFICATE

Object **D2600V2 - SN: 1071**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

CC  
 WMP

Calibration date: **October 20, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 07-Oct-14 (No. 217-02020)         | Oct-15                 |
| Power sensor HP 8481A       | US37292783         | 07-Oct-14 (No. 217-02020)         | Oct-15                 |
| Power sensor HP 8481A       | MY41092317         | 07-Oct-14 (No. 217-02021)         | Oct-15                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 03-Apr-14 (No. 217-01918)         | Apr-15                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 03-Apr-14 (No. 217-01921)         | Apr-15                 |
| Reference Probe ES3DV3      | SN: 3205           | 30-Dec-13 (No. ES3-3205_Dec13)    | Dec-14                 |
| DAE4                        | SN: 601            | 18-Aug-14 (No. DAE4-601_Aug14)    | Aug-15                 |
| Secondary Standards         | ID #               | Check Date (In house)             | Scheduled Check        |
| RF generator R&S SMT-06     | 100005             | 04-Aug-99 (in house check Oct-13) | In house check: Oct-16 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

Calibrated by: **Michael Weber**      Name: **Michael Weber**      Function: **Laboratory Technician**

Signature

*M. Weber*

Approved by: **Katja Pokovic**      Name: **Katja Pokovic**      Technical Manager

*K. Pokovic*

Issued: October 20, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.8.8     |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 10 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 2600 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 39.0           | 1.96 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 37.8 $\pm$ 6 % | 2.03 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 14.7 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 57.5 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW Input power | 6.57 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 25.9 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 52.5           | 2.16 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 50.8 $\pm$ 6 % | 2.22 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW Input power | 14.5 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 56.9 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW Input power | 6.43 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 25.4 W/kg $\pm$ 16.5 % (k=2) |

## Appendix (Additional assessments outside the scope of SCS108)

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 48.7 $\Omega$ - 5.2 j $\Omega$ |
| Return Loss                          | - 25.3 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 45.9 $\Omega$ - 4.2 j $\Omega$ |
| Return Loss                          | - 24.2 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.153 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |               |
|-----------------|---------------|
| Manufactured by | SPEAG         |
| Manufactured on | July 17, 2013 |

## DASY5 Validation Report for Head TSL

Date: 20.10.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1071**

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.03$  S/m;  $\epsilon_r = 37.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.46, 4.46, 4.46); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Head Tissue/Pin=250 mW, $d=10$ mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 103.3 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 31.0 W/kg

**SAR(1 g) = 14.7 W/kg; SAR(10 g) = 6.57 W/kg**

Maximum value of SAR (measured) = 19.7 W/kg

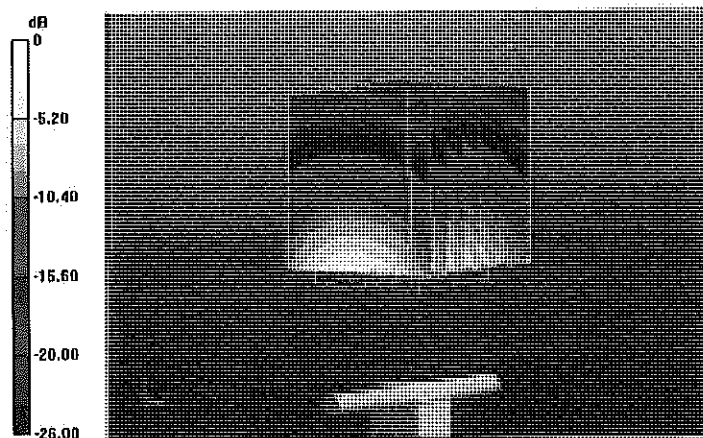


0 dB = 19.7 W/kg = 12.94 dBW/kg

# Impedance Measurement Plot for Head TSL

20 Oct 2014 11:58:04  
 CH1 S11 1 U.FS 1: 48.721  $\Omega$  -5.2461  $\Omega$  11.668 pF 2 600.000 000 MHz

\*  
 Del  
 CA

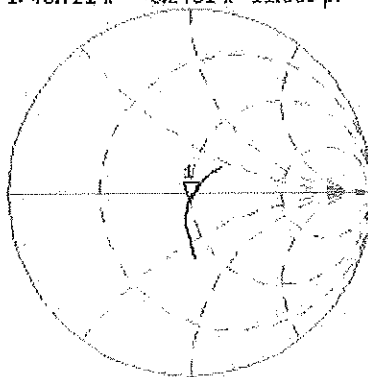

AVG  
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -25.254 dB 2 600.000 000 MHz

CA

AVG  
 16

H1d

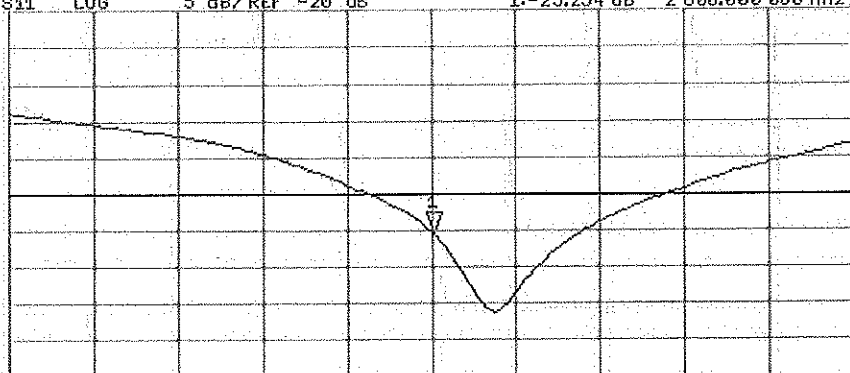

START 2 400.000 000 MHz

STOP 2 800.000 000 MHz

## DASY5 Validation Report for Body TSL

Date: 20.10.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1071**

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.22$  S/m;  $\epsilon_r = 50.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.24, 4.24, 4.24); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.02 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 31.0 W/kg


**SAR(1 g) = 14.5 W/kg; SAR(10 g) = 6.43 W/kg**

Maximum value of SAR (measured) = 19.3 W/kg

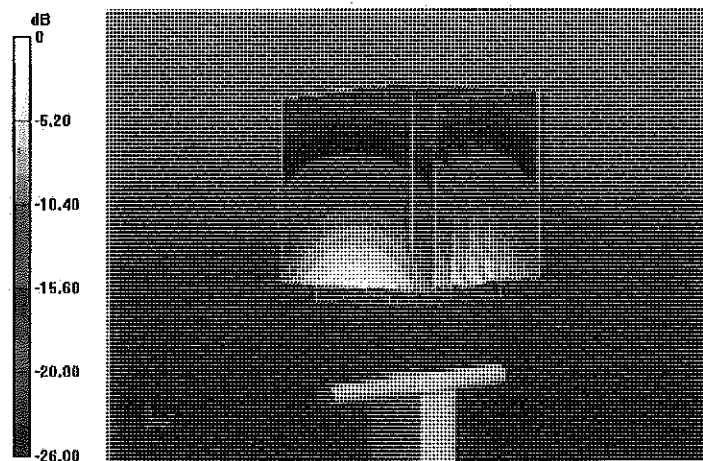

0 dB = 19.3 W/kg = 12.86 dBW/kg

Impedance Measurement Plot for Body TSL

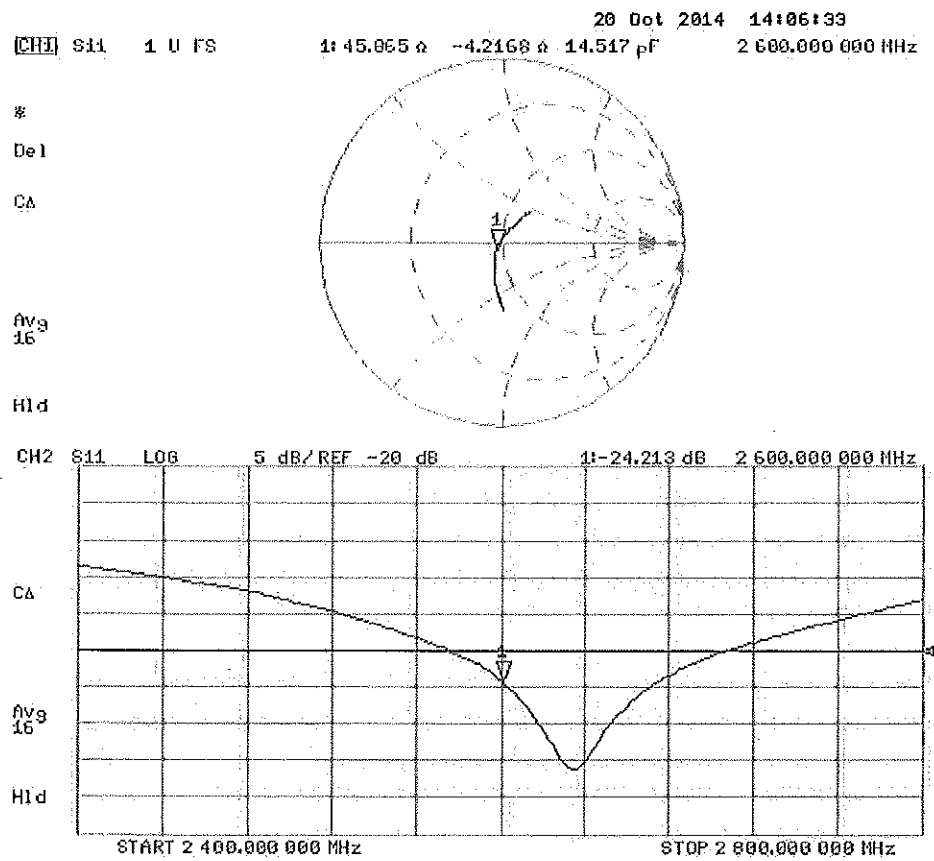



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D5GHzV2-1120\_Feb15**

## CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1120**

Calibration procedure(s) **QA CAL-22.v2**  
**Calibration procedure for dipole validation kits between 3-6 GHz**

*BN ✓*  
*3/6/2015*

Calibration date: **February 17, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 07-Oct-14 (No. 217-02020)         | Oct-15                 |
| Power sensor HP 8481A       | US37292783         | 07-Oct-14 (No. 217-02020)         | Oct-15                 |
| Power sensor HP 8481A       | MY41092317         | 07-Oct-14 (No. 217-02021)         | Oct-15                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 03-Apr-14 (No. 217-01918)         | Apr-15                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 03-Apr-14 (No. 217-01921)         | Apr-15                 |
| Reference Probe EX3DV4      | SN: 3503           | 30-Dec-14 (No. EX3-3503_Dec14)    | Dec-15                 |
| DAE4                        | SN: 601            | 18-Aug-14 (No. DAE4-601_Aug14)    | Aug-15                 |
| Secondary Standards         | ID #               | Check Date (In house)             | Scheduled Check        |
| RF generator R&S SMT-06     | 100005             | 04-Aug-99 (in house check Oct-13) | In house check: Oct-16 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

Calibrated by: **Claudio Leubler** **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** **Technical Manager**

Issued: February 17, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"
- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                                                                                                                      |                                  |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------|----------------------------------|
| <b>DASY Version</b>                 | DASY5                                                                                                                | V52.8.8                          |
| <b>Extrapolation</b>                | Advanced Extrapolation                                                                                               |                                  |
| <b>Phantom</b>                      | Modular Flat Phantom V5.0                                                                                            |                                  |
| <b>Distance Dipole Center - TSL</b> | 10 mm                                                                                                                | with Spacer                      |
| <b>Zoom Scan Resolution</b>         | dx, dy = 4.0 mm, dz = 1.4 mm                                                                                         | Graded Ratio = 1.4 (Z direction) |
| <b>Frequency</b>                    | 5200 MHz $\pm$ 1 MHz<br>5300 MHz $\pm$ 1 MHz<br>5500 MHz $\pm$ 1 MHz<br>5600 MHz $\pm$ 1 MHz<br>5800 MHz $\pm$ 1 MHz |                                  |

## Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C             | 36.0           | 4.66 mho/m           |
| <b>Measured Head TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 35.4 $\pm$ 6 % | 4.54 mho/m $\pm$ 6 % |
| <b>Head TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL at 5200 MHz

| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                                |
|-------------------------------------------------------------|--------------------|------------------------------------------------|
| SAR measured                                                | 100 mW input power | 7.81 W/kg                                      |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>77.8 W/kg <math>\pm</math> 19.9 % (k=2)</b> |

| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                                |
|---------------------------------------------------------------|--------------------|------------------------------------------------|
| SAR measured                                                  | 100 mW input power | 2.24 W/kg                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>22.3 W/kg <math>\pm</math> 19.5 % (k=2)</b> |

### Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.9         | 4.76 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 35.2 ± 6 %   | 4.64 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5300 MHz

|                                                             |                    |                                   |
|-------------------------------------------------------------|--------------------|-----------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                   |
| SAR measured                                                | 100 mW input power | 8.15 W/kg                         |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>81.1 W / kg ± 19.9 % (k=2)</b> |

|                                                               |                    |                                 |
|---------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                 |
| SAR measured                                                  | 100 mW input power | 2.33 W/kg                       |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>23.2 W/kg ± 19.5 % (k=2)</b> |

### Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.6         | 4.96 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 35.0 ± 6 %   | 4.83 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5500 MHz

|                                                             |                    |                                 |
|-------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                 |
| SAR measured                                                | 100 mW input power | 8.21 W/kg                       |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>81.7 W/kg ± 19.9 % (k=2)</b> |

|                                                               |                    |                                 |
|---------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                 |
| SAR measured                                                  | 100 mW input power | 2.32 W/kg                       |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>23.1 W/kg ± 19.5 % (k=2)</b> |

### Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.5         | 5.07 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.8 ± 6 %   | 4.94 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5600 MHz

|                                                             |                    |                                 |
|-------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                 |
| SAR measured                                                | 100 mW input power | 8.03 W/kg                       |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>79.9 W/kg ± 19.9 % (k=2)</b> |

|                                                               |                    |                                 |
|---------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                 |
| SAR measured                                                  | 100 mW input power | 2.29 W/kg                       |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>22.8 W/kg ± 19.5 % (k=2)</b> |

### Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.3         | 5.27 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.5 ± 6 %   | 5.15 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5800 MHz

|                                                             |                    |                                 |
|-------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                 |
| SAR measured                                                | 100 mW input power | 7.77 W/kg                       |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>77.3 W/kg ± 19.9 % (k=2)</b> |

|                                                               |                    |                                 |
|---------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                 |
| SAR measured                                                  | 100 mW input power | 2.21 W/kg                       |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>22.0 W/kg ± 19.5 % (k=2)</b> |

### Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 49.0         | 5.30 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 48.5 ± 6 %   | 5.46 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5200 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 7.44 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 74.3 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.08 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 20.8 W/kg ± 19.5 % (k=2) |

### Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.9         | 5.42 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 48.3 ± 6 %   | 5.59 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5300 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 7.53 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 75.2 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.11 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 21.1 W/kg ± 19.5 % (k=2) |

### Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.6         | 5.65 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 47.9 ± 6 %   | 5.85 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5500 MHz

|                                                             |                    |                                 |
|-------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | Condition          |                                 |
| SAR measured                                                | 100 mW input power | 7.96 W/kg                       |
| SAR for nominal Body TSL parameters                         | normalized to 1W   | <b>79.5 W/kg ± 19.9 % (k=2)</b> |

|                                                               |                    |                                 |
|---------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |                                 |
| SAR measured                                                  | 100 mW input power | 2.21 W/kg                       |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>22.1 W/kg ± 19.5 % (k=2)</b> |

### Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.5         | 5.77 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 47.7 ± 6 %   | 5.99 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5600 MHz

|                                                             |                    |                                 |
|-------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | Condition          |                                 |
| SAR measured                                                | 100 mW input power | 7.75 W/kg                       |
| SAR for nominal Body TSL parameters                         | normalized to 1W   | <b>77.4 W/kg ± 19.9 % (k=2)</b> |

|                                                               |                    |                                 |
|---------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |                                 |
| SAR measured                                                  | 100 mW input power | 2.15 W/kg                       |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>21.4 W/kg ± 19.5 % (k=2)</b> |

## Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.2         | 6.00 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 47.4 ± 6 %   | 6.28 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

## SAR result with Body TSL at 5800 MHz

|                                                             |                    |                                 |
|-------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | Condition          |                                 |
| SAR measured                                                | 100 mW input power | 7.64 W/kg                       |
| SAR for nominal Body TSL parameters                         | normalized to 1W   | <b>76.3 W/kg ± 19.9 % (k=2)</b> |

|                                                               |                    |                                 |
|---------------------------------------------------------------|--------------------|---------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |                                 |
| SAR measured                                                  | 100 mW input power | 2.10 W/kg                       |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>20.9 W/kg ± 19.5 % (k=2)</b> |

## Appendix (Additional assessments outside the scope of SCS0108)

### Antenna Parameters with Head TSL at 5200 MHz

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $53.7 \Omega - 5.4 j\Omega$ |
| Return Loss                          | - 24.0 dB                   |

### Antenna Parameters with Head TSL at 5300 MHz

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $50.1 \Omega + 2.0 j\Omega$ |
| Return Loss                          | - 34.0 dB                   |

### Antenna Parameters with Head TSL at 5500 MHz

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $50.9 \Omega - 2.5 j\Omega$ |
| Return Loss                          | - 31.6 dB                   |

### Antenna Parameters with Head TSL at 5600 MHz

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $58.4 \Omega + 0.2 j\Omega$ |
| Return Loss                          | - 22.2 dB                   |

### Antenna Parameters with Head TSL at 5800 MHz

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $51.5 \Omega + 2.6 j\Omega$ |
| Return Loss                          | - 30.5 dB                   |

### Antenna Parameters with Body TSL at 5200 MHz

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $52.9 \Omega - 3.6 j\Omega$ |
| Return Loss                          | - 26.9 dB                   |

### Antenna Parameters with Body TSL at 5300 MHz

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $49.9 \Omega + 2.8 j\Omega$ |
| Return Loss                          | - 31.0 dB                   |

### Antenna Parameters with Body TSL at 5500 MHz

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $51.4 \Omega - 1.4 j\Omega$ |
| Return Loss                          | - 34.3 dB                   |

### Antenna Parameters with Body TSL at 5600 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 58.5 $\Omega$ + 1.9 j $\Omega$ |
| Return Loss                          | - 21.9 dB                      |

### Antenna Parameters with Body TSL at 5800 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.8 $\Omega$ + 4.3 j $\Omega$ |
| Return Loss                          | - 26.8 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.207 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                    |
|-----------------|--------------------|
| Manufactured by | SPEAG              |
| Manufactured on | September 08, 2011 |



## DASY5 Validation Report for Head TSL

Date: 17.02.2015

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1120**

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.54$  S/m;  $\epsilon_r = 35.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>,

Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.64$  S/m;  $\epsilon_r = 35.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>,

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 4.83$  S/m;  $\epsilon_r = 35$ ;  $\rho = 1000$  kg/m<sup>3</sup>,

Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.94$  S/m;  $\epsilon_r = 34.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>,

Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.15$  S/m;  $\epsilon_r = 34.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.51, 5.51, 5.51); Calibrated: 30.12.2014, ConvF(5.21, 5.21, 5.21); Calibrated: 30.12.2014, ConvF(5.12, 5.12, 5.12); Calibrated: 30.12.2014, ConvF(4.92, 4.92, 4.92); Calibrated: 30.12.2014, ConvF(4.9, 4.9, 4.9); Calibrated: 30.12.2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.11 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 28.3 W/kg

**SAR(1 g) = 7.81 W/kg; SAR(10 g) = 2.24 W/kg**

Maximum value of SAR (measured) = 17.8 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.53 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 30.4 W/kg

**SAR(1 g) = 8.15 W/kg; SAR(10 g) = 2.33 W/kg**

Maximum value of SAR (measured) = 18.8 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.02 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 32.0 W/kg

**SAR(1 g) = 8.21 W/kg; SAR(10 g) = 2.32 W/kg**

Maximum value of SAR (measured) = 19.2 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 63.14 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 31.3 W/kg  
**SAR(1 g) = 8.03 W/kg; SAR(10 g) = 2.29 W/kg**

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 60.76 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 31.8 W/kg  
**SAR(1 g) = 7.77 W/kg; SAR(10 g) = 2.21 W/kg**  
Maximum value of SAR (measured) = 18.7 W/kg

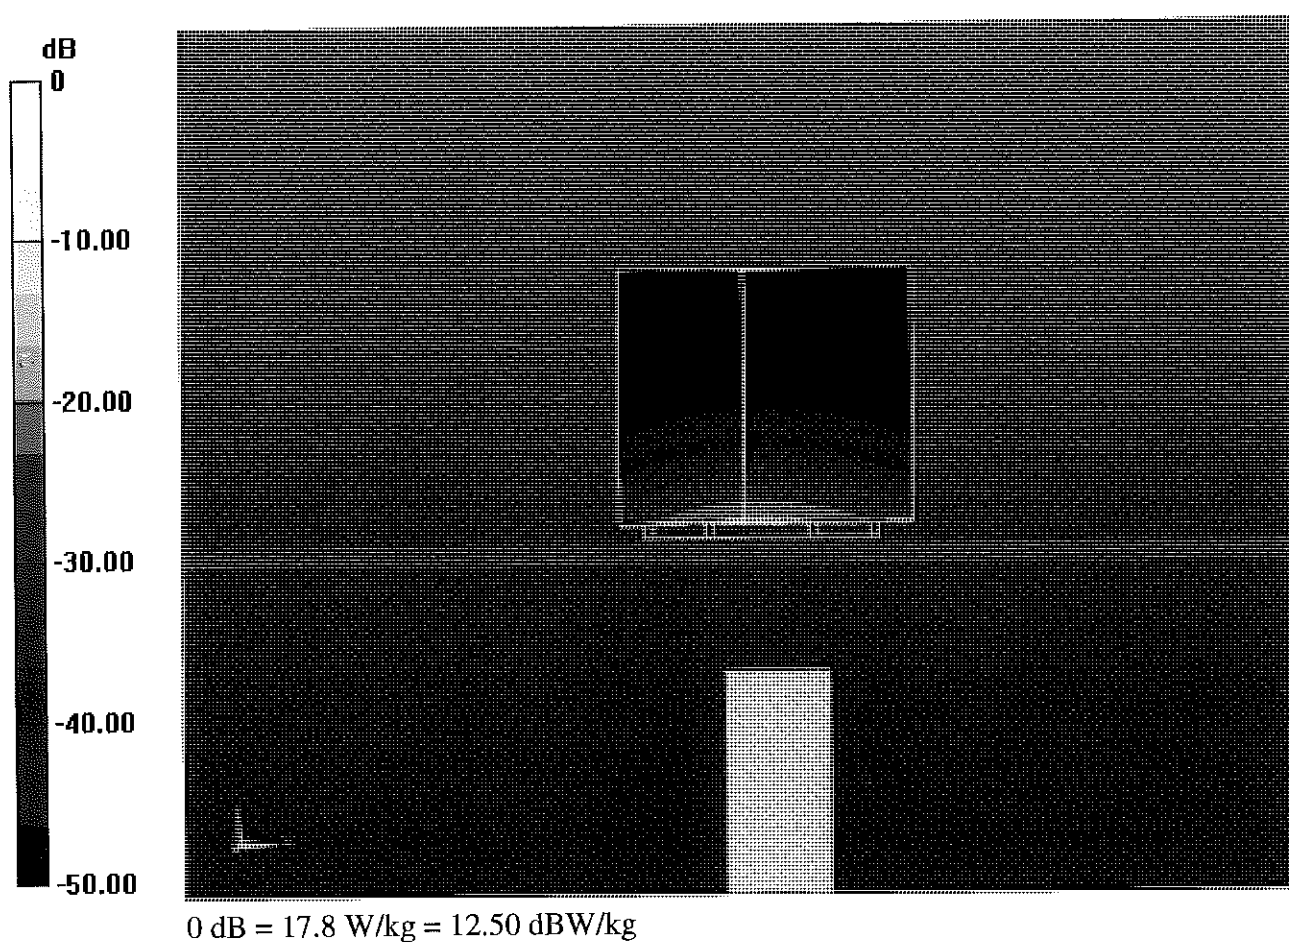

# Impedance Measurement Plot for Head TSL

16 Feb 2015 11:34:26  
 [CH1] S11 1 U FS 1: 53.650  $\Omega$  -5.4375  $\Omega$  5.6288 pF 5 200.000 000 MHz


\*

De1

Cor

Avg  
16

H1d

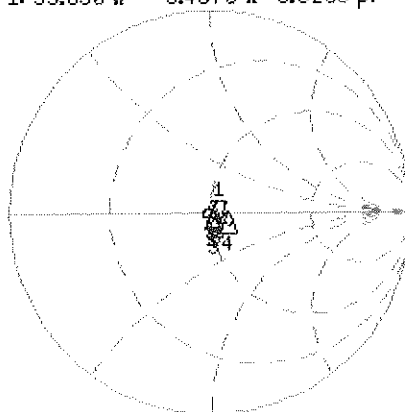

CH1 Markers


2: 50.104  $\Omega$   
 1.9961  $\Omega$   
 5.30000 GHz  
 3: 50.939  $\Omega$   
 -2.4727  $\Omega$   
 5.50000 GHz  
 4: 50.404  $\Omega$   
 0.1895  $\Omega$   
 5.60000 GHz  
 5: 51.496  $\Omega$   
 2.6133  $\Omega$   
 5.80000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1:-24.000 dB 5 200.000 000 MHz

Cor

Avg  
16

H1d

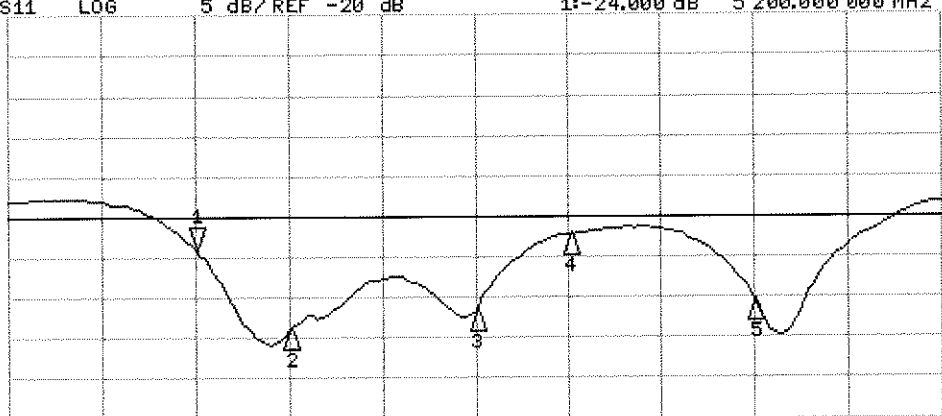

CH2 Markers

2:-33.992 dB  
 5.30000 GHz  
 3:-31.633 dB  
 5.50000 GHz  
 4:-22.210 dB  
 5.60000 GHz  
 5:-30.540 dB  
 5.80000 GHz

START 5 000.000 000 MHz

STOP 6 000.000 000 MHz

Test Laboratory: SPEAG, Zurich, Switzerland

### DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1120

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.46$  S/m;  $\epsilon_r = 48.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>,

Medium parameters used:  $f = 5300$  MHz;  $\sigma = 5.59$  S/m;  $\epsilon_r = 48.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>,

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.85$  S/m;  $\epsilon_r = 47.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>,

Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.99$  S/m;  $\epsilon_r = 47.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>,

Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.28$  S/m;  $\epsilon_r = 47.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

### DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.95, 4.95, 4.95); Calibrated: 30.12.2014, ConvF(4.78, 4.78, 4.78); Calibrated: 30.12.2014, ConvF(4.45, 4.45, 4.45); Calibrated: 30.12.2014, ConvF(4.35, 4.35, 4.35); Calibrated: 30.12.2014, ConvF(4.32, 4.32, 4.32); Calibrated: 30.12.2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.32 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 29.5 W/kg

**SAR(1 g) = 7.44 W/kg; SAR(10 g) = 2.08 W/kg**

Maximum value of SAR (measured) = 17.5 W/kg

### Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 57.81 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 30.5 W/kg

**SAR(1 g) = 7.53 W/kg; SAR(10 g) = 2.11 W/kg**

Maximum value of SAR (measured) = 17.9 W/kg

### Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 58.23 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 34.1 W/kg

**SAR(1 g) = 7.96 W/kg; SAR(10 g) = 2.21 W/kg**

Maximum value of SAR (measured) = 19.2 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 57.03 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 34.3 W/kg  
SAR(1 g) = 7.75 W/kg; SAR(10 g) = 2.15 W/kg  
Maximum value of SAR (measured) = 19.1 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 55.44 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 35.8 W/kg  
SAR(1 g) = 7.64 W/kg; SAR(10 g) = 2.1 W/kg

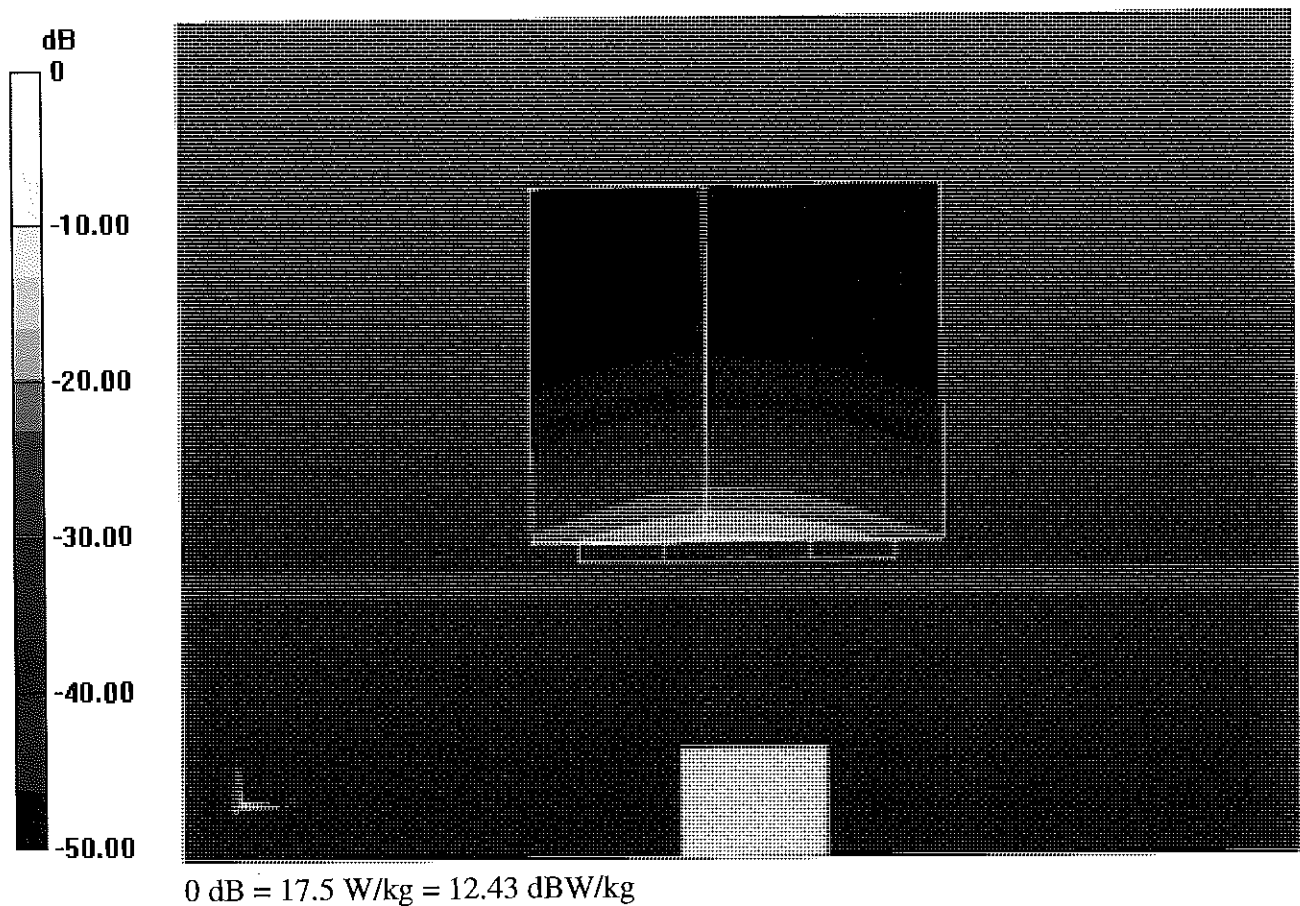

# Impedance Measurement Plot for Body TSL

16 Feb 2015 11:34:01  
 [CH1] S11 1 U FS 1: 52.871  $\Omega$  -3.6367  $\Omega$  8.4160 pF 5 200.000 000 MHz


\*

De1

Cor

Avg  
16

H1d

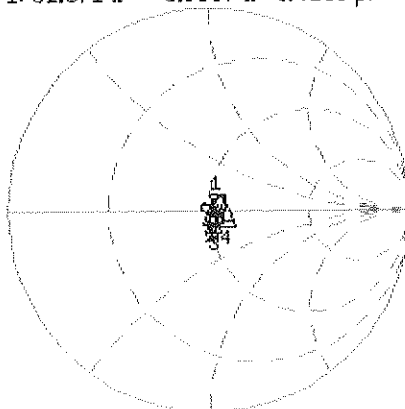

CH1 Markers

2: 49.928  $\Omega$   
2.8203  $\Omega$   
5.30000 GHz

3: 51.355  $\Omega$   
-1.4063  $\Omega$   
5.50000 GHz

4: 50.475  $\Omega$   
1.8555  $\Omega$   
5.60000 GHz


5: 51.844  $\Omega$   
4.3027  $\Omega$   
5.80000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -26.930 dB 5 200.000 000 MHz

Cor

Avg  
16

H1d

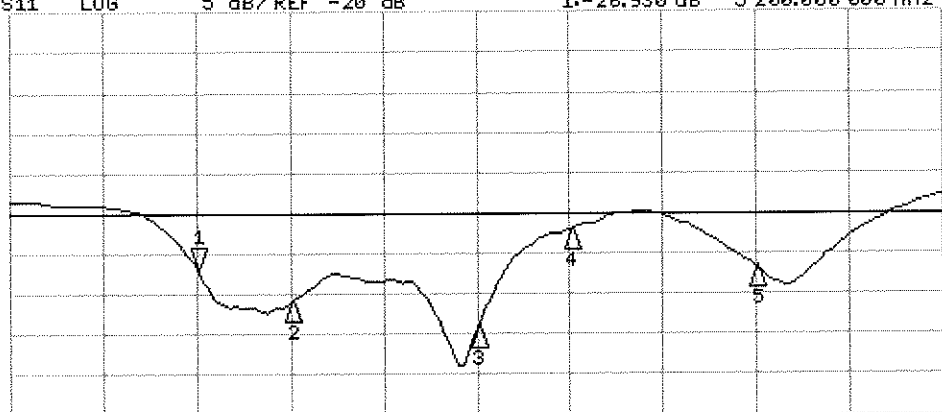

CH2 Markers

2: -30.981 dB  
5.30000 GHz

3: -34.308 dB  
5.50000 GHz

4: -21.944 dB  
5.60000 GHz

5: -26.760 dB  
5.80000 GHz

START 5 000.000 000 MHz

STOP 6 000.000 000 MHz



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D835V2-4d132\_Jan15**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d132**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

CC  
 2/3/15

Calibration date: **January 16, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 07-Oct-14 (No. 217-02020)         | Oct-15                 |
| Power sensor HP 8481A       | US37292783         | 07-Oct-14 (No. 217-02020)         | Oct-15                 |
| Power sensor HP 8481A       | MY41092317         | 07-Oct-14 (No. 217-02021)         | Oct-15                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 03-Apr-14 (No. 217-01918)         | Apr-15                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 03-Apr-14 (No. 217-01921)         | Apr-15                 |
| Reference Probe ES3DV3      | SN: 3205           | 30-Dec-14 (No. ES3-3205_Dec14)    | Dec-15                 |
| DAE4                        | SN: 601            | 18-Aug-14 (No. DAE4-601_Aug14)    | Aug-15                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| RF generator R&S SMT-06     | 100005             | 04-Aug-99 (in house check Oct-13) | In house check: Oct-16 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

Calibrated by: **Michael Weber** Function: **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** Technical Manager

Issued: January 19, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.8.8     |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 15 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 835 MHz $\pm$ 1 MHz    |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 41.5           | 0.90 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 41.5 $\pm$ 6 % | 0.93 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 2.37 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 9.25 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 1.54 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 6.04 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 55.2           | 0.97 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 55.8 $\pm$ 6 % | 1.01 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 2.35 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 9.14 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 1.53 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 5.98 W/kg $\pm$ 16.5 % (k=2) |

## Appendix (Additional assessments outside the scope of SCS0108)

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.8 $\Omega$ - 2.3 j $\Omega$ |
| Return Loss                          | - 30.8 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.5 $\Omega$ - 4.3 j $\Omega$ |
| Return Loss                          | - 25.9 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.385 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |               |
|-----------------|---------------|
| Manufactured by | SPEAG         |
| Manufactured on | July 22, 2011 |

## DASY5 Validation Report for Head TSL

Date: 16.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d132**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.93 \text{ S/m}$ ;  $\epsilon_r = 41.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.2, 6.2, 6.2); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 56.27 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.51 W/kg


**SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.54 W/kg**

Maximum value of SAR (measured) = 2.77 W/kg

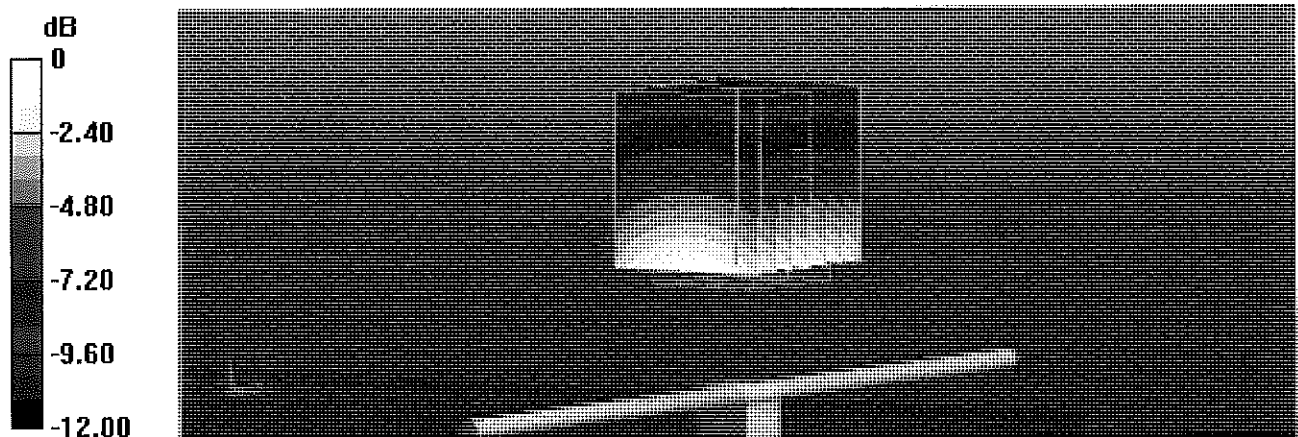

0 dB = 2.77 W/kg = 4.42 dBW/kg

Impedance Measurement Plot for Head TSL

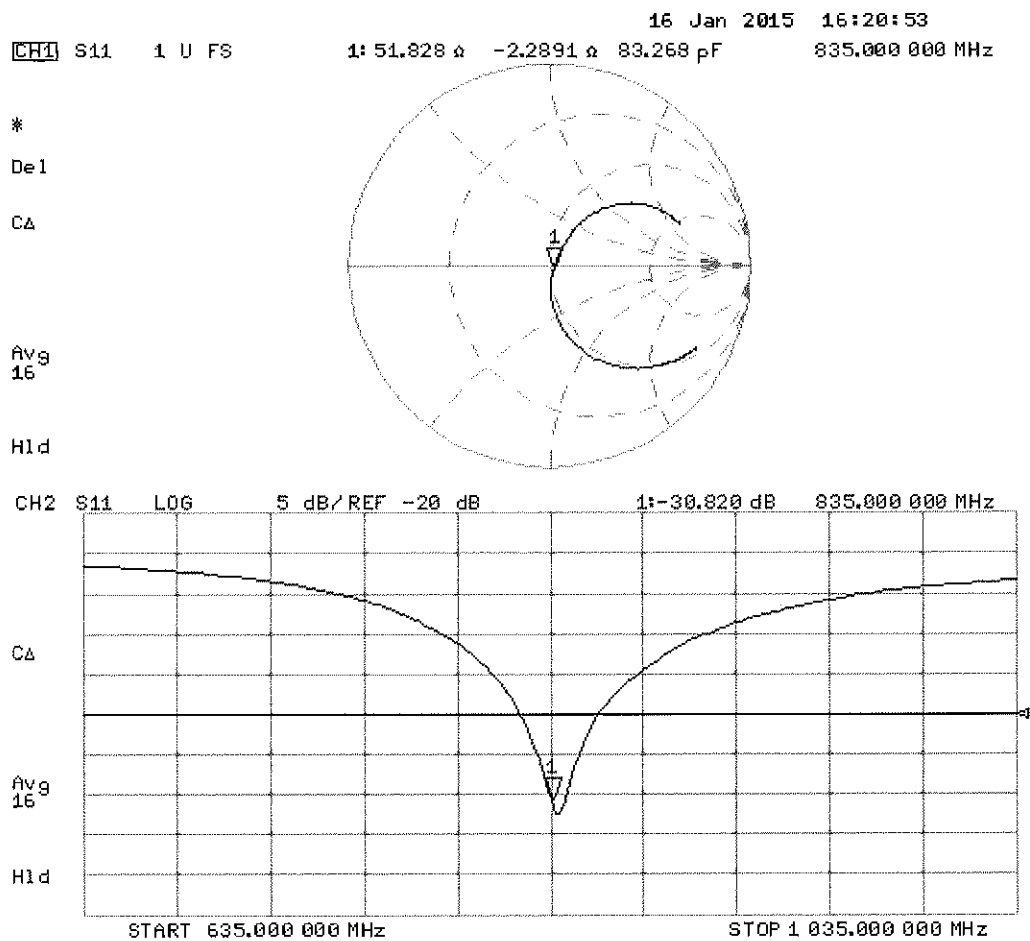

## DASY5 Validation Report for Body TSL

Date: 16.01.2015

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d132**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 1.01 \text{ S/m}$ ;  $\epsilon_r = 55.8$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.17, 6.17, 6.17); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### **Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 54.27 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.47 W/kg

**SAR(1 g) = 2.35 W/kg; SAR(10 g) = 1.53 W/kg**


Maximum value of SAR (measured) = 2.75 W/kg

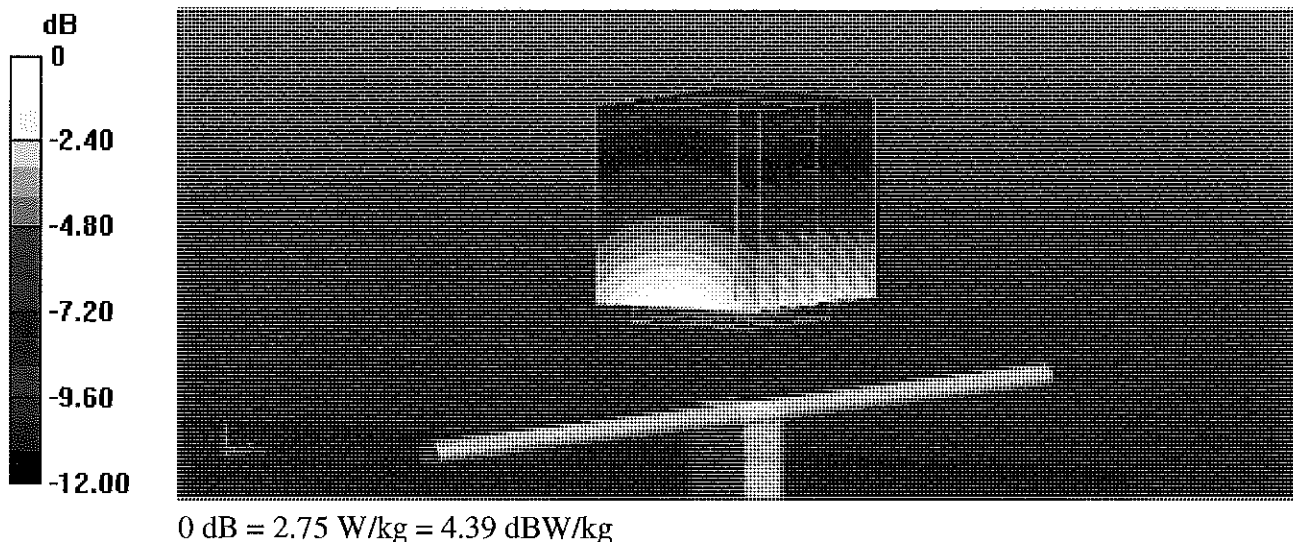

# Impedance Measurement Plot for Body TSL

16 Jan 2015 13:51:19  
 CH1 S11 1 U FS 1: 47.498  $\Omega$  -4.2520  $\Omega$  44.828 pF 835.000 000 MHz

\*  
 De1  
 CA

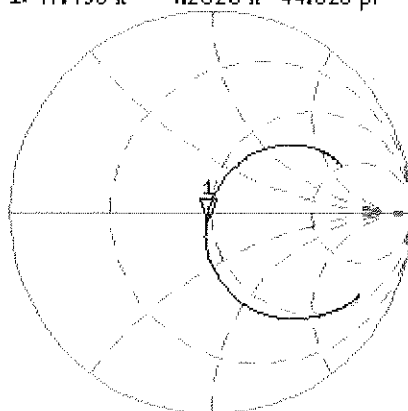


Avg  
 16  
 H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-25.931 dB 835.000 000 MHz

CA

Avg  
 16

H1d

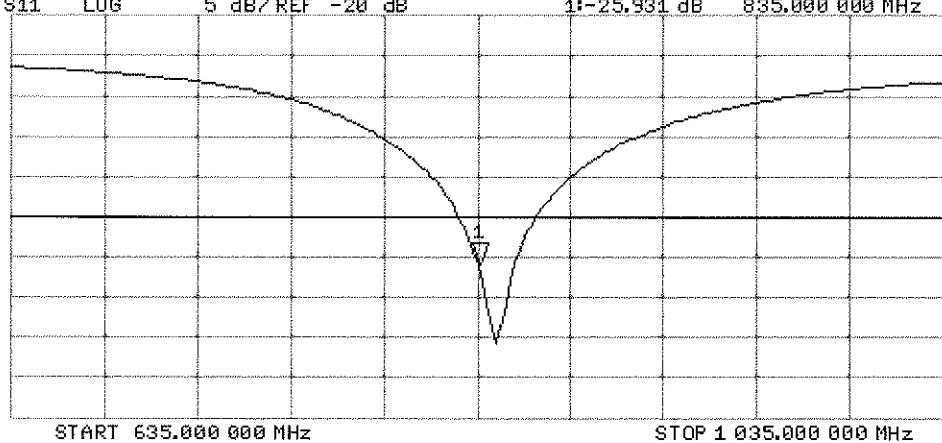



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **D1900V2-5d141\_Apr15**

## CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d141**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **April 14, 2015**

PN ✓  
 4/29/15

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 07-Oct-14 (No. 217-02020)         | Oct-15                 |
| Power sensor HP 8481A       | US37292783         | 07-Oct-14 (No. 217-02020)         | Oct-15                 |
| Power sensor HP 8481A       | MY41092317         | 07-Oct-14 (No. 217-02021)         | Oct-15                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 01-Apr-15 (No. 217-02131)         | Mar-16                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 01-Apr-15 (No. 217-02134)         | Mar-16                 |
| Reference Probe ES3DV3      | SN: 3205           | 30-Dec-14 (No. ES3-3205_Dec14)    | Dec-15                 |
| DAE4                        | SN: 601            | 18-Aug-14 (No. DAE4-601_Aug14)    | Aug-15                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| RF generator R&S SMT-06     | 100005             | 04-Aug-99 (in house check Oct-13) | In house check: Oct-16 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

Calibrated by: Name **Claudio Leubler** Function **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** Technical Manager

Issued: April 14, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.8.8     |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 10 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 1900 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 40.0           | 1.40 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 38.6 $\pm$ 6 % | 1.37 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                                                |
|-------------------------------------------------------|--------------------|------------------------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                                |
| SAR measured                                          | 250 mW input power | 9.93 W/kg                                      |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>39.9 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

|                                                         |                    |                                                |
|---------------------------------------------------------|--------------------|------------------------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                                |
| SAR measured                                            | 250 mW input power | 5.20 W/kg                                      |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>20.9 W/kg <math>\pm</math> 16.5 % (k=2)</b> |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 53.3           | 1.52 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 52.8 $\pm$ 6 % | 1.50 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                                                |
|-------------------------------------------------------|--------------------|------------------------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                                                |
| SAR measured                                          | 250 mW input power | 9.94 W/kg                                      |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | <b>40.0 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

|                                                         |                    |                                                |
|---------------------------------------------------------|--------------------|------------------------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                                                |
| SAR measured                                            | 250 mW input power | 5.29 W/kg                                      |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | <b>21.2 W/kg <math>\pm</math> 16.5 % (k=2)</b> |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $53.0 \Omega + 4.6 j\Omega$ |
| Return Loss                          | - 25.5 dB                   |

### Antenna Parameters with Body TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $48.2 \Omega + 5.6 j\Omega$ |
| Return Loss                          | - 24.5 dB                   |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.198 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                |
|-----------------|----------------|
| Manufactured by | SPEAG          |
| Manufactured on | March 11, 2011 |

## DASY5 Validation Report for Head TSL

Date: 14.04.2015

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d141**

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.37$  S/m;  $\epsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5, 5, 5); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.18 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 18.2 W/kg

**SAR(1 g) = 9.93 W/kg; SAR(10 g) = 5.2 W/kg**

Maximum value of SAR (measured) = 12.5 W/kg

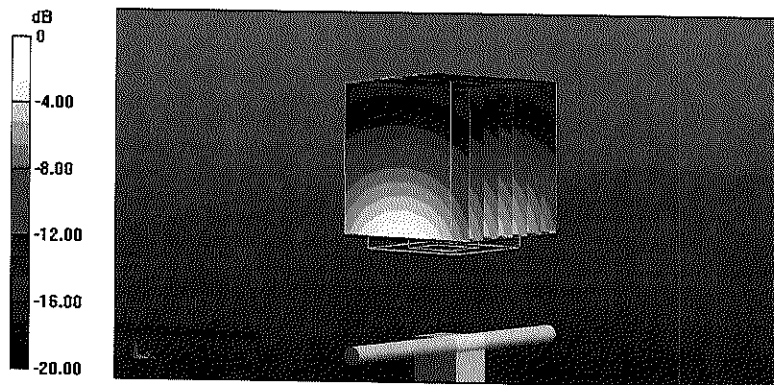


0 dB = 12.5 W/kg = 10.97 dBW/kg

# Impedance Measurement Plot for Head TSL

14 Apr 2015 13:39:53  
 [CH1] S11 1 U FS 1: 53.010  $\Omega$  4.5664  $\Omega$  382.51 pF 1 900.000 000 MHz

\*  
 De1  
 CA

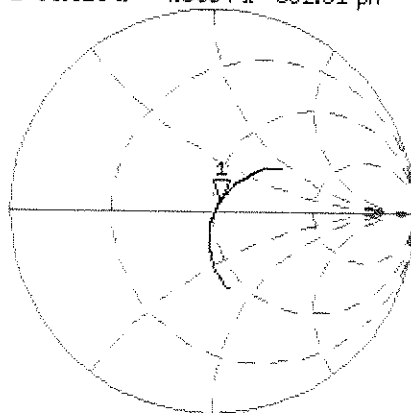

Avg  
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-25.507 dB 1 900.000 000 MHz

CA

Avg  
 16

H1d

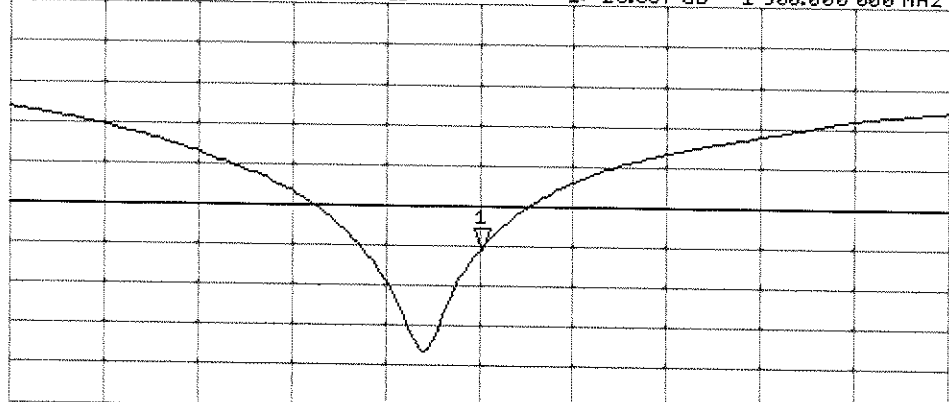

START 1 700.000 000 MHz

STOP 2 100.000 000 MHz

## DASY5 Validation Report for Body TSL

Date: 14.04.2015

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d141**

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.5$  S/m;  $\epsilon_r = 52.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.65, 4.65, 4.65); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.73 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 16.9 W/kg

**SAR(1 g) = 9.94 W/kg; SAR(10 g) = 5.29 W/kg**

Maximum value of SAR (measured) = 12.5 W/kg

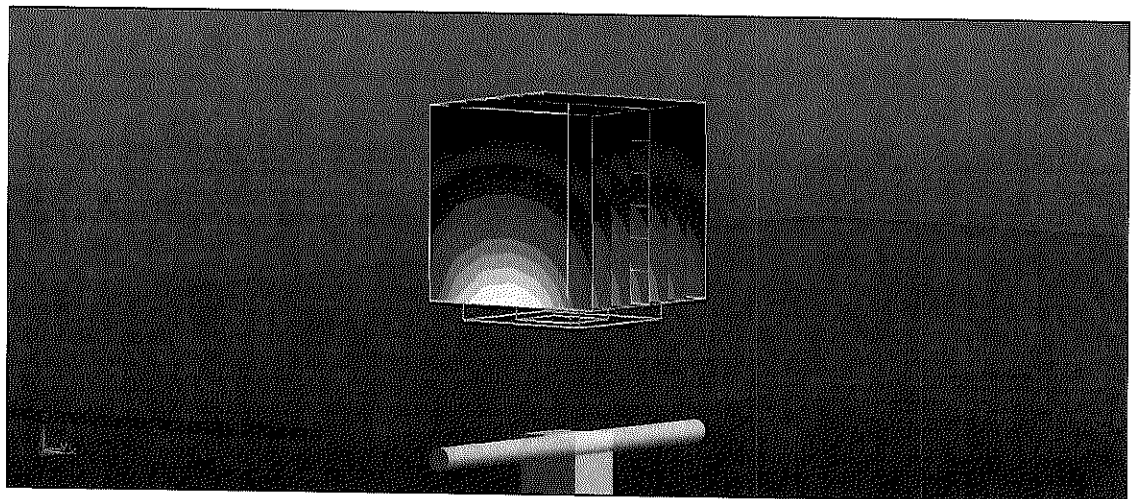


0 dB = 12.5 W/kg = 10.97 dBW/kg

# Impedance Measurement Plot for Body TSL


14 Apr 2015 13:39:04  
 CH1 S11 1 U FS 1: 48.211  $\Omega$  5.5664  $\Omega$  466.27 pF 1 900.000 000 MHz

\*  
 Del  
 CA  
 Avg  
 16  
 H1d

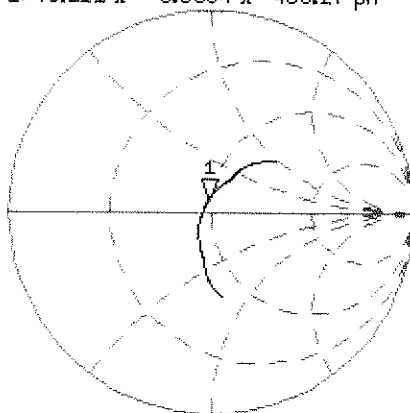

CH2 S11 LOG 5 dB/REF -20 dB 1:-24,520 dB 1 900.000 000 MHz

CA  
 Avg  
 16  
 H1d

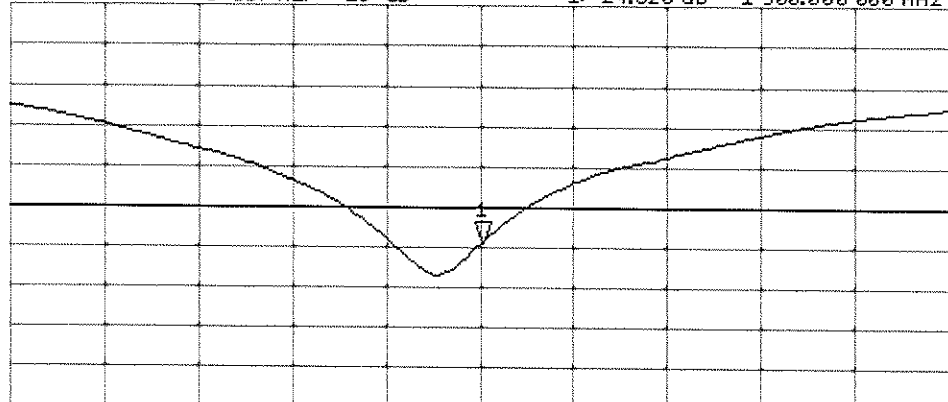

START 1 700.000 000 MHz

STOP 2 100.000 000 MHz



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **D5GHzV2-1191\_Sep14**

## CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1191**

Calibration procedure(s) **QA CAL-22.v2**  
**Calibration procedure for dipole validation kits between 3-6 GHz**

CC  
11/14

Calibration date: **September 25, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 09-Oct-13 (No. 217-01827)         | Oct-14                 |
| Power sensor HP 8481A       | US37292783         | 09-Oct-13 (No. 217-01827)         | Oct-14                 |
| Power sensor HP 8481A       | MY41092317         | 09-Oct-13 (No. 217-01828)         | Oct-14                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 03-Apr-14 (No. 217-01918)         | Apr-15                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 03-Apr-14 (No. 217-01921)         | Apr-15                 |
| Reference Probe EX3DV4      | SN: 3503           | 30-Dec-13 (No. EX3-3503_Dec13)    | Dec-14                 |
| DAE4                        | SN: 601            | 18-Aug-14 (No. DAE4-601_Aug14)    | Aug-15                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| RF generator R&S SMT-06     | 100005             | 04-Aug-99 (in house check Oct-13) | In house check: Oct-16 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

Calibrated by: **Claudio Leubler** **Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Signature

Issued: September 25, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- a) IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"
- c) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                                                                                                                      |                                  |
|------------------------------|----------------------------------------------------------------------------------------------------------------------|----------------------------------|
| DASY Version                 | DASY5                                                                                                                | V52.8.8                          |
| Extrapolation                | Advanced Extrapolation                                                                                               |                                  |
| Phantom                      | Modular Flat Phantom V5.0                                                                                            |                                  |
| Distance Dipole Center - TSL | 10 mm                                                                                                                | with Spacer                      |
| Zoom Scan Resolution         | dx, dy = 4.0 mm, dz = 1.4 mm                                                                                         | Graded Ratio = 1.4 (Z direction) |
| Frequency                    | 5200 MHz $\pm$ 1 MHz<br>5300 MHz $\pm$ 1 MHz<br>5500 MHz $\pm$ 1 MHz<br>5600 MHz $\pm$ 1 MHz<br>5800 MHz $\pm$ 1 MHz |                                  |

## Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

|                                         |                     |                |                      |
|-----------------------------------------|---------------------|----------------|----------------------|
|                                         | Temperature         | Permittivity   | Conductivity         |
| Nominal Head TSL parameters             | 22.0 °C             | 36.0           | 4.66 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 34.9 $\pm$ 6 % | 4.54 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL at 5200 MHz

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 100 mW input power | 8.17 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 81.1 W/kg $\pm$ 19.9 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 100 mW input power | 2.33 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 23.1 W/kg $\pm$ 19.5 % (k=2) |

### Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.9         | 4.76 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.8 ± 6 %   | 4.64 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5300 MHz

|                                                       |                    |                            |
|-------------------------------------------------------|--------------------|----------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                            |
| SAR measured                                          | 100 mW input power | 8.64 W/kg                  |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 85.8 W / kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.47 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 24.5 W/kg ± 19.5 % (k=2) |

### Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.6         | 4.96 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.5 ± 6 %   | 4.83 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5500 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 8.93 W/kg                |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 88.6 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.54 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 25.2 W/kg ± 19.5 % (k=2) |

### Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.5         | 5.07 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.4 ± 6 %   | 4.93 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5600 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 8.76 W/kg                |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 86.9 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.49 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 24.7 W/kg ± 19.5 % (k=2) |

### Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.3         | 5.27 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.1 ± 6 %   | 5.14 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5800 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 8.30 W/kg                |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 82.3 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.35 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 23.3 W/kg ± 19.5 % (k=2) |

### Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 49.0         | 5.30 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 47.1 ± 6 %   | 5.40 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5200 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 7.84 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 77.8 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.18 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 21.6 W/kg ± 19.5 % (k=2) |

### Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.9         | 5.42 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 46.9 ± 6 %   | 5.53 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5300 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 8.05 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 79.9 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.25 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 22.3 W/kg ± 19.5 % (k=2) |

**Body TSL parameters at 5500 MHz**

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.6         | 5.65 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 46.6 ± 6 %   | 5.79 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

**SAR result with Body TSL at 5500 MHz**

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 8.37 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 83.1 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.32 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 23.0 W/kg ± 19.5 % (k=2) |

**Body TSL parameters at 5600 MHz**

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.5         | 5.77 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 46.4 ± 6 %   | 5.93 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

**SAR result with Body TSL at 5600 MHz**

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 8.48 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 84.1 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.35 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 23.3 W/kg ± 19.5 % (k=2) |

### Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.2         | 6.00 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 46.1 ± 6 %   | 6.21 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5800 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 7.86 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 78.0 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.17 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 21.5 W/kg ± 19.5 % (k=2) |

## Appendix (Additional assessments outside the scope of SCS108)

### Antenna Parameters with Head TSL at 5200 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.8 $\Omega$ - 9.9 j $\Omega$ |
| Return Loss                          | - 20.1 dB                      |

### Antenna Parameters with Head TSL at 5300 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 54.5 $\Omega$ - 1.5 j $\Omega$ |
| Return Loss                          | - 26.8 dB                      |

### Antenna Parameters with Head TSL at 5500 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 49.6 $\Omega$ - 2.0 j $\Omega$ |
| Return Loss                          | - 33.9 dB                      |

### Antenna Parameters with Head TSL at 5600 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 56.5 $\Omega$ - 4.4 j $\Omega$ |
| Return Loss                          | - 22.7 dB                      |

### Antenna Parameters with Head TSL at 5800 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 56.6 $\Omega$ + 4.4 j $\Omega$ |
| Return Loss                          | - 22.6 dB                      |

### Antenna Parameters with Body TSL at 5200 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.9 $\Omega$ - 8.1 j $\Omega$ |
| Return Loss                          | - 21.8 dB                      |

### Antenna Parameters with Body TSL at 5300 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 54.5 $\Omega$ + 0.1 j $\Omega$ |
| Return Loss                          | - 27.3 dB                      |

### Antenna Parameters with Body TSL at 5500 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 50.2 $\Omega$ - 0.6 j $\Omega$ |
| Return Loss                          | - 43.8 dB                      |

### Antenna Parameters with Body TSL at 5600 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 57.5 $\Omega$ - 3.2 j $\Omega$ |
| Return Loss                          | - 22.4 dB                      |

### Antenna Parameters with Body TSL at 5800 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 57.2 $\Omega$ + 5.2 j $\Omega$ |
| Return Loss                          | - 21.7 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.202 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                |
|-----------------|----------------|
| Manufactured by | SPEAG          |
| Manufactured on | April 01, 2014 |



## DASY5 Validation Report for Head TSL

Date: 25.09.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1191**

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.54$  S/m;  $\epsilon_r = 34.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.64$  S/m;  $\epsilon_r = 34.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 4.83$  S/m;  $\epsilon_r = 34.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.93$  S/m;  $\epsilon_r = 34.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.14$  S/m;  $\epsilon_r = 34.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.52, 5.52, 5.52); Calibrated: 30.12.2013, ConvF(5.2, 5.2, 5.2); Calibrated: 30.12.2013, ConvF(5.01, 5.01, 5.01); Calibrated: 30.12.2013, ConvF(4.86, 4.86, 4.86); Calibrated: 30.12.2013, ConvF(4.91, 4.91, 4.91); Calibrated: 30.12.2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.20 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 30.0 W/kg

**SAR(1 g) = 8.17 W/kg; SAR(10 g) = 2.33 W/kg**

Maximum value of SAR (measured) = 18.5 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.90 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 32.7 W/kg

**SAR(1 g) = 8.64 W/kg; SAR(10 g) = 2.47 W/kg**

Maximum value of SAR (measured) = 19.8 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.91 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 35.3 W/kg

**SAR(1 g) = 8.93 W/kg; SAR(10 g) = 2.54 W/kg**

Maximum value of SAR (measured) = 20.9 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.29 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 34.8 W/kg

**SAR(1 g) = 8.76 W/kg; SAR(10 g) = 2.49 W/kg**


Maximum value of SAR (measured) = 20.7 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 62.74 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 34.4 W/kg


**SAR(1 g) = 8.3 W/kg; SAR(10 g) = 2.35 W/kg**

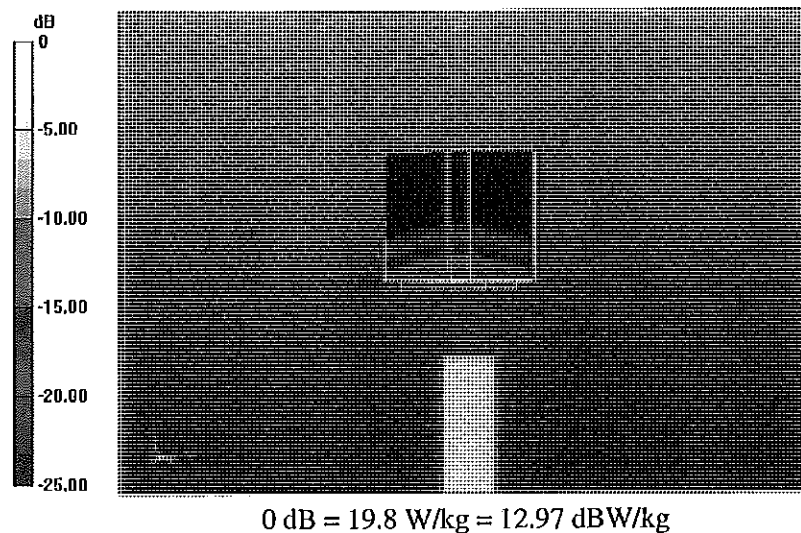

# Impedance Measurement Plot for Head TSL

25 Sep 2014 11:07:52  
 CH1 S11 1 U FS 1: 51.911  $\Omega$  -9.9180  $\Omega$  3.0060 pF 5 200.000 000 MHz

#  
 Del  
 Cor  
 Avg  
 0  
 H1d

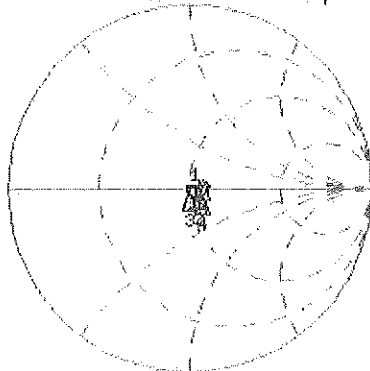


CH1 Markers

2: 54.518  $\Omega$   
 -1.5078  $\Omega$   
 5.30000 GHz  
 3: 49.566  $\Omega$   
 -1.9707  $\Omega$   
 5.50000 GHz  
 4: 56.516  $\Omega$   
 -4.3633  $\Omega$   
 5.60000 GHz  
 5: 56.555  $\Omega$   
 4.3904  $\Omega$   
 5.80000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1:-20.126 dB 5 200.000 000 MHz

Cor  
 Avg  
 0  
 H1d

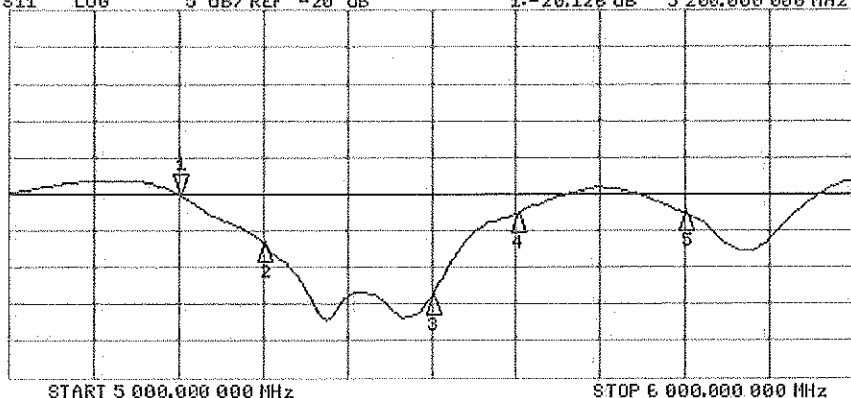

CH2 Markers

2:-26.825 dB  
 5.30000 GHz  
 3:-33.870 dB  
 5.50000 GHz  
 4:-22.660 dB  
 5.60000 GHz  
 5:-22.611 dB  
 5.80000 GHz

## DASY5 Validation Report for Body TSL

Date: 24.09.2014

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1191**

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.4$  S/m;  $\epsilon_r = 47.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 5300$  MHz;  $\sigma = 5.53$  S/m;  $\epsilon_r = 46.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.79$  S/m;  $\epsilon_r = 46.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.93$  S/m;  $\epsilon_r = 46.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.21$  S/m;  $\epsilon_r = 46.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.01, 5.01, 5.01); Calibrated: 30.12.2013, ConvF(4.76, 4.76, 4.76); Calibrated: 30.12.2013, ConvF(4.52, 4.52, 4.52); Calibrated: 30.12.2013, ConvF(4.3, 4.3, 4.3); Calibrated: 30.12.2013, ConvF(4.47, 4.47, 4.47); Calibrated: 30.12.2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 60.46 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 30.7 W/kg

**SAR(1 g) = 7.84 W/kg; SAR(10 g) = 2.18 W/kg**

Maximum value of SAR (measured) = 18.5 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 60.42 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 32.1 W/kg

**SAR(1 g) = 8.05 W/kg; SAR(10 g) = 2.25 W/kg**

Maximum value of SAR (measured) = 19.1 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 60.44 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 35.8 W/kg

**SAR(1 g) = 8.37 W/kg; SAR(10 g) = 2.32 W/kg**

Maximum value of SAR (measured) = 20.4 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 60.44 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 37.0 W/kg

**SAR(1 g) = 8.48 W/kg; SAR(10 g) = 2.35 W/kg**

Maximum value of SAR (measured) = 20.9 W/kg


**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 56.69 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 36.4 W/kg

**SAR(1 g) = 7.86 W/kg; SAR(10 g) = 2.17 W/kg**

Maximum value of SAR (measured) = 19.7 W/kg

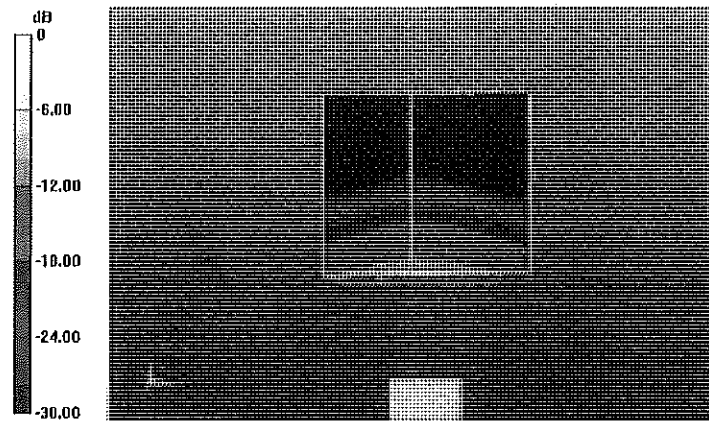


0 dB = 19.7 W/kg = 12.94 dBW/kg

# Impedance Measurement Plot for Body TSL

24 Sep 2014 11:05:50  
 [CH1] S11 1 U FS 1: 51.867  $\Omega$  -8.0566  $\Omega$  3.7989 pF 5 200.000 000 MHz

#  
 Del  
 Cor  
 Avg  
 16  
 H1d

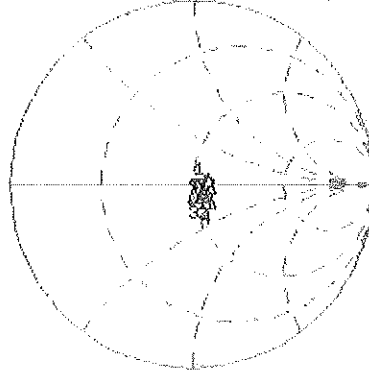


CH1 Markers

2: 54.531  $\Omega$   
 0.1015  $\Omega$   
 5.30000 GHz  
 3: 50.207  $\Omega$   
 -613.28  $\Omega$   
 5.50000 GHz  
 4: 57.480  $\Omega$   
 -3.1563  $\Omega$   
 5.60000 GHz  
 5: 57.150  $\Omega$   
 5.1934  $\Omega$   
 5.80000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -21.835 dB 5 200.000 000 MHz

Cor  
 Avg  
 16  
 H1d

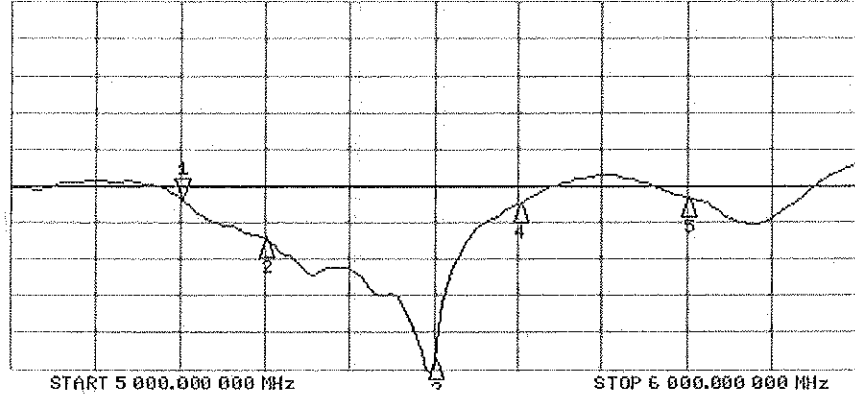

CH2 Markers

2: -27.251 dB  
 5.30000 GHz  
 3: -43.776 dB  
 5.50000 GHz  
 4: -22.442 dB  
 5.60000 GHz  
 5: -21.682 dB  
 5.80000 GHz



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **ES3-3288\_Sep14/2**

# **CALIBRATION CERTIFICATE (Replacement of No:ES3-3288\_Sep14)**

Object **ES3DV3 - SN:3288**

Calibration procedure(s)

**QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**  
**Calibration procedure for dosimetric E-field probes**

**CC**  
**10/12/14**

Calibration date:

**September 24, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 03-Apr-14 (No. 217-01911)         | Apr-15                 |
| Power sensor E4412A        | MY41498087      | 03-Apr-14 (No. 217-01911)         | Apr-15                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 03-Apr-14 (No. 217-01915)         | Apr-15                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 03-Apr-14 (No. 217-01919)         | Apr-15                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920)         | Apr-15                 |
| Reference Probe ES3DV2     | SN: 3013        | 30-Dec-13 (No. ES3-3013_Dec13)    | Dec-14                 |
| DAE4                       | SN: 660         | 13-Dec-13 (No. DAE4-660_Dec13)    | Dec-14                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-16 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

|                                                                                                                 | Name          | Function              | Signature |
|-----------------------------------------------------------------------------------------------------------------|---------------|-----------------------|-----------|
| Calibrated by:                                                                                                  | Leif Klysner  | Laboratory Technician |           |
| Approved by:                                                                                                    | Katja Pokovic | Technical Manager     |           |
| Issued: November 3, 2014                                                                                        |               |                       |           |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |               |                       |           |



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                       |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).



# Probe ES3DV3

## SN:3288

|               |                    |
|---------------|--------------------|
| Manufactured: | July 6, 2010       |
| Repaired:     | September 18, 2014 |
| Calibrated:   | September 24, 2014 |

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

# DASY/EASY - Parameters of Probe: ES3DV3 - SN:3288

## Basic Calibration Parameters

|                                       | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|---------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu V/(V/m)^2$ ) <sup>A</sup> | 1.05     | 1.16     | 0.92     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                 | 105.1    | 104.6    | 106.7    |               |

## Modulation Calibration Parameters

| UID           | Communication System Name                     |   | A<br>dB | B<br>dB $\sqrt{\mu V}$ | C    | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|---------------|-----------------------------------------------|---|---------|------------------------|------|---------|----------|---------------------------|
| 0             | CW                                            | X | 0.0     | 0.0                    | 1.0  | 0.00    | 195.8    | $\pm 3.5 \%$              |
|               |                                               | Y | 0.0     | 0.0                    | 1.0  |         | 175.9    |                           |
|               |                                               | Z | 0.0     | 0.0                    | 1.0  |         | 177.1    |                           |
| 10010-<br>CAA | SAR Validation (Square, 100ms, 10ms)          | X | 2.71    | 61.9                   | 11.4 | 10.00   | 40.3     | $\pm 2.2 \%$              |
|               |                                               | Y | 2.37    | 60.2                   | 11.2 |         | 42.6     |                           |
|               |                                               | Z | 1.54    | 56.6                   | 8.9  |         | 41.2     |                           |
| 10011-<br>CAB | UMTS-FDD (WCDMA)                              | X | 3.29    | 67.1                   | 18.4 | 2.91    | 133.8    | $\pm 0.5 \%$              |
|               |                                               | Y | 3.43    | 67.9                   | 18.9 |         | 139.5    |                           |
|               |                                               | Z | 3.45    | 68.1                   | 18.9 |         | 141.3    |                           |
| 10012-<br>CAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)      | X | 2.99    | 68.9                   | 18.6 | 1.87    | 135.1    | $\pm 0.7 \%$              |
|               |                                               | Y | 3.59    | 72.4                   | 20.4 |         | 140.7    |                           |
|               |                                               | Z | 3.54    | 72.4                   | 20.3 |         | 143.0    |                           |
| 10013-<br>CAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 11.15   | 70.8                   | 23.3 | 9.46    | 132.3    | $\pm 3.5 \%$              |
|               |                                               | Y | 11.29   | 70.8                   | 23.2 |         | 141.1    |                           |
|               |                                               | Z | 11.07   | 70.7                   | 23.2 |         | 139.2    |                           |
| 10021-<br>DAB | GSM-FDD (TDMA, GMSK)                          | X | 14.71   | 90.5                   | 24.5 | 9.39    | 149.0    | $\pm 1.9 \%$              |
|               |                                               | Y | 16.40   | 92.8                   | 26.0 |         | 131.3    |                           |
|               |                                               | Z | 11.34   | 87.2                   | 23.6 |         | 126.1    |                           |
| 10023-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0)                   | X | 15.91   | 92.2                   | 25.3 | 9.57    | 138.9    | $\pm 2.5 \%$              |
|               |                                               | Y | 21.25   | 96.9                   | 27.2 |         | 142.0    |                           |
|               |                                               | Z | 11.68   | 87.2                   | 23.5 |         | 145.9    |                           |
| 10024-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0-1)                 | X | 38.62   | 99.8                   | 24.7 | 6.56    | 123.8    | $\pm 2.2 \%$              |
|               |                                               | Y | 36.71   | 99.7                   | 25.2 |         | 128.1    |                           |
|               |                                               | Z | 36.56   | 99.4                   | 24.5 |         | 129.5    |                           |
| 10027-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2)               | X | 56.60   | 99.6                   | 22.6 | 4.80    | 138.8    | $\pm 1.9 \%$              |
|               |                                               | Y | 46.94   | 99.9                   | 23.7 |         | 149.9    |                           |
|               |                                               | Z | 51.17   | 99.8                   | 22.9 |         | 144.9    |                           |
| 10028-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)             | X | 70.88   | 100.0                  | 21.6 | 3.55    | 147.5    | $\pm 1.9 \%$              |
|               |                                               | Y | 52.58   | 99.8                   | 22.6 |         | 129.4    |                           |
|               |                                               | Z | 76.98   | 99.8                   | 21.2 |         | 128.7    |                           |
| 10032-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)           | X | 98.89   | 99.5                   | 18.9 | 1.16    | 135.8    | $\pm 1.4 \%$              |
|               |                                               | Y | 78.39   | 99.6                   | 19.5 |         | 141.7    |                           |
|               |                                               | Z | 95.21   | 95.5                   | 17.1 |         | 143.4    |                           |
| 10039-<br>CAB | CDMA2000 (1xRTT, RC1)                         | X | 4.72    | 66.7                   | 18.9 | 4.57    | 133.7    | $\pm 0.9 \%$              |
|               |                                               | Y | 4.85    | 67.1                   | 19.1 |         | 137.7    |                           |
|               |                                               | Z | 4.81    | 67.4                   | 19.2 |         | 141.9    |                           |

|           |                                               |   |       |      |      |      |       |        |
|-----------|-----------------------------------------------|---|-------|------|------|------|-------|--------|
| 10081-CAB | CDMA2000 (1xRTT, RC3)                         | X | 3.91  | 66.3 | 18.6 | 3.97 | 129.5 | ±0.7 % |
|           |                                               | Y | 4.00  | 66.6 | 18.7 |      | 133.7 |        |
|           |                                               | Z | 3.99  | 66.8 | 18.8 |      | 137.5 |        |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2)                   | X | 4.63  | 66.9 | 18.7 | 3.98 | 141.4 | ±0.7 % |
|           |                                               | Y | 4.78  | 67.5 | 19.0 |      | 147.7 |        |
|           |                                               | Z | 4.57  | 66.8 | 18.6 |      | 127.8 |        |
| 10100-CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)      | X | 6.59  | 68.2 | 20.1 | 5.67 | 149.2 | ±1.4 % |
|           |                                               | Y | 6.36  | 67.3 | 19.6 |      | 130.7 |        |
|           |                                               | Z | 6.36  | 67.5 | 19.6 |      | 133.6 |        |
| 10108-CAB | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)      | X | 6.44  | 67.8 | 20.0 | 5.80 | 146.6 | ±1.4 % |
|           |                                               | Y | 6.23  | 66.8 | 19.4 |      | 128.8 |        |
|           |                                               | Z | 6.24  | 67.1 | 19.6 |      | 131.4 |        |
| 10110-CAB | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)       | X | 6.08  | 67.1 | 19.6 | 5.75 | 143.2 | ±1.4 % |
|           |                                               | Y | 6.20  | 67.4 | 19.8 |      | 148.0 |        |
|           |                                               | Z | 5.92  | 66.6 | 19.3 |      | 128.5 |        |
| 10114-CAA | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | X | 10.32 | 69.3 | 21.5 | 8.10 | 137.0 | ±2.2 % |
|           |                                               | Y | 10.31 | 69.1 | 21.4 |      | 143.5 |        |
|           |                                               | Z | 10.37 | 69.5 | 21.6 |      | 146.1 |        |
| 10117-CAA | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)      | X | 10.35 | 69.4 | 21.6 | 8.07 | 138.3 | ±2.2 % |
|           |                                               | Y | 10.36 | 69.3 | 21.4 |      | 146.4 |        |
|           |                                               | Z | 10.42 | 69.6 | 21.6 |      | 149.0 |        |
| 10151-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)       | X | 9.95  | 75.7 | 26.2 | 9.28 | 134.9 | ±3.3 % |
|           |                                               | Y | 10.37 | 76.0 | 26.1 |      | 146.6 |        |
|           |                                               | Z | 9.77  | 75.4 | 26.0 |      | 142.5 |        |
| 10154-CAB | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)       | X | 6.12  | 67.2 | 19.7 | 5.75 | 144.9 | ±1.4 % |
|           |                                               | Y | 6.21  | 67.4 | 19.8 |      | 148.8 |        |
|           |                                               | Z | 5.91  | 66.5 | 19.3 |      | 128.7 |        |
| 10160-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)       | X | 6.28  | 66.7 | 19.4 | 5.82 | 125.5 | ±1.2 % |
|           |                                               | Y | 6.37  | 66.8 | 19.4 |      | 129.7 |        |
|           |                                               | Z | 6.36  | 67.1 | 19.6 |      | 132.9 |        |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)         | X | 5.08  | 67.6 | 20.2 | 5.73 | 147.0 | ±1.2 % |
|           |                                               | Y | 4.95  | 66.6 | 19.6 |      | 128.6 |        |
|           |                                               | Z | 4.91  | 66.9 | 19.8 |      | 131.2 |        |
| 10172-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)         | X | 8.18  | 77.2 | 27.2 | 9.21 | 123.4 | ±2.7 % |
|           |                                               | Y | 8.37  | 76.6 | 26.6 |      | 129.5 |        |
|           |                                               | Z | 7.97  | 76.7 | 26.9 |      | 128.7 |        |
| 10175-CAB | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)         | X | 5.05  | 67.4 | 20.1 | 5.72 | 146.2 | ±1.4 % |
|           |                                               | Y | 5.10  | 67.3 | 20.0 |      | 142.8 |        |
|           |                                               | Z | 4.87  | 66.7 | 19.6 |      | 129.6 |        |
| 10181-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)         | X | 5.04  | 67.4 | 20.0 | 5.72 | 145.5 | ±1.2 % |
|           |                                               | Y | 5.12  | 67.4 | 20.0 |      | 143.4 |        |
|           |                                               | Z | 4.87  | 66.7 | 19.6 |      | 129.9 |        |
| 10193-CAA | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)  | X | 9.92  | 68.9 | 21.4 | 8.09 | 131.0 | ±2.2 % |
|           |                                               | Y | 9.84  | 68.5 | 21.1 |      | 130.0 |        |
|           |                                               | Z | 9.94  | 69.0 | 21.4 |      | 138.6 |        |

|           |                                                               |   |       |      |      |      |       |        |
|-----------|---------------------------------------------------------------|---|-------|------|------|------|-------|--------|
| 10196-CAA | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)                       | X | 9.90  | 68.9 | 21.4 | 8.10 | 130.8 | ±2.2 % |
|           |                                                               | Y | 9.81  | 68.4 | 21.0 |      | 131.4 |        |
|           |                                                               | Z | 9.95  | 69.1 | 21.5 |      | 140.5 |        |
| 10219-CAA | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)                       | X | 9.81  | 68.8 | 21.3 | 8.03 | 130.0 | ±2.2 % |
|           |                                                               | Y | 9.89  | 68.9 | 21.3 |      | 138.1 |        |
|           |                                                               | Z | 9.89  | 69.1 | 21.5 |      | 140.5 |        |
| 10222-CAA | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)                        | X | 10.25 | 69.2 | 21.4 | 8.06 | 137.1 | ±2.2 % |
|           |                                                               | Y | 10.30 | 69.2 | 21.4 |      | 144.4 |        |
|           |                                                               | Z | 10.38 | 69.6 | 21.6 |      | 148.4 |        |
| 10225-CAB | UMTS-FDD (HSPA+)                                              | X | 6.90  | 66.8 | 19.3 | 5.97 | 132.8 | ±1.4 % |
|           |                                                               | Y | 7.09  | 67.3 | 19.6 |      | 142.0 |        |
|           |                                                               | Z | 7.04  | 67.4 | 19.6 |      | 143.5 |        |
| 10237-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)                         | X | 9.61  | 81.9 | 29.6 | 9.21 | 149.3 | ±2.7 % |
|           |                                                               | Y | 8.66  | 77.6 | 27.1 |      | 133.7 |        |
|           |                                                               | Z | 8.20  | 77.5 | 27.3 |      | 132.2 |        |
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)                       | X | 9.16  | 74.5 | 25.8 | 9.24 | 126.3 | ±3.0 % |
|           |                                                               | Y | 9.62  | 75.0 | 25.8 |      | 137.4 |        |
|           |                                                               | Z | 9.16  | 74.8 | 25.9 |      | 135.2 |        |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)                      | X | 9.97  | 75.7 | 26.3 | 9.30 | 133.7 | ±3.3 % |
|           |                                                               | Y | 10.38 | 75.9 | 26.1 |      | 146.1 |        |
|           |                                                               | Z | 9.91  | 75.7 | 26.3 |      | 143.8 |        |
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)                     | X | 5.86  | 66.6 | 18.7 | 4.87 | 129.9 | ±0.9 % |
|           |                                                               | Y | 6.01  | 67.1 | 19.0 |      | 135.7 |        |
|           |                                                               | Z | 5.95  | 67.1 | 19.0 |      | 139.4 |        |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)                      | X | 4.40  | 66.7 | 18.6 | 3.96 | 136.4 | ±0.7 % |
|           |                                                               | Y | 4.55  | 67.3 | 19.0 |      | 138.3 |        |
|           |                                                               | Z | 4.56  | 67.6 | 19.1 |      | 144.3 |        |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate                                | X | 3.64  | 66.9 | 18.7 | 3.46 | 127.4 | ±0.5 % |
|           |                                                               | Y | 3.77  | 67.6 | 19.1 |      | 130.2 |        |
|           |                                                               | Z | 3.72  | 67.5 | 19.0 |      | 134.4 |        |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate                                | X | 3.58  | 67.0 | 18.7 | 3.39 | 128.4 | ±0.5 % |
|           |                                                               | Y | 3.73  | 67.7 | 19.1 |      | 132.7 |        |
|           |                                                               | Z | 3.69  | 67.8 | 19.1 |      | 136.1 |        |
| 10297-AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)                       | X | 6.43  | 67.7 | 19.9 | 5.81 | 145.5 | ±1.4 % |
|           |                                                               | Y | 6.49  | 67.7 | 19.9 |      | 149.5 |        |
|           |                                                               | Z | 6.23  | 67.0 | 19.6 |      | 129.5 |        |
| 10311-AAA | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)                      | X | 6.74  | 67.3 | 19.8 | 6.06 | 126.7 | ±1.4 % |
|           |                                                               | Y | 6.83  | 67.5 | 19.8 |      | 132.9 |        |
|           |                                                               | Z | 6.81  | 67.6 | 19.9 |      | 135.8 |        |
| 10315-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)     | X | 3.00  | 69.9 | 19.4 | 1.71 | 133.9 | ±0.5 % |
|           |                                                               | Y | 3.30  | 71.5 | 20.1 |      | 141.0 |        |
|           |                                                               | Z | 3.22  | 71.4 | 20.0 |      | 142.9 |        |
| 10316-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle) | X | 10.17 | 69.2 | 21.8 | 8.36 | 130.5 | ±2.5 % |
|           |                                                               | Y | 10.20 | 69.1 | 21.6 |      | 138.4 |        |
|           |                                                               | Z | 10.20 | 69.4 | 21.8 |      | 140.7 |        |

|           |                                                               |   |       |      |      |      |       |        |
|-----------|---------------------------------------------------------------|---|-------|------|------|------|-------|--------|
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0)                                    | X | 4.75  | 68.3 | 18.8 | 3.76 | 138.5 | ±0.7 % |
|           |                                                               | Y | 5.00  | 69.1 | 19.2 |      | 146.7 |        |
|           |                                                               | Z | 4.92  | 69.2 | 19.1 |      | 148.5 |        |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A)                                    | X | 4.73  | 68.6 | 18.9 | 3.77 | 136.3 | ±0.7 % |
|           |                                                               | Y | 4.97  | 69.4 | 19.4 |      | 143.7 |        |
|           |                                                               | Z | 4.91  | 69.6 | 19.3 |      | 146.0 |        |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)     | X | 2.65  | 68.1 | 18.5 | 1.54 | 135.2 | ±0.5 % |
|           |                                                               | Y | 3.05  | 70.8 | 19.9 |      | 140.7 |        |
|           |                                                               | Z | 2.87  | 69.8 | 19.3 |      | 144.8 |        |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 10.00 | 69.0 | 21.5 | 8.23 | 130.8 | ±2.2 % |
|           |                                                               | Y | 10.06 | 68.9 | 21.4 |      | 138.6 |        |
|           |                                                               | Z | 10.08 | 69.3 | 21.7 |      | 141.6 |        |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 8 and 9).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3288

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 6.81    | 6.81    | 6.81    | 0.37               | 1.70                    | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 6.51    | 6.51    | 6.51    | 0.45               | 1.52                    | ± 12.0 %    |
| 1750                 | 40.1                               | 1.37                            | 5.38    | 5.38    | 5.38    | 0.44               | 1.58                    | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 5.17    | 5.17    | 5.17    | 0.80               | 1.18                    | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 4.56    | 4.56    | 4.56    | 0.80               | 1.21                    | ± 12.0 %    |
| 2600                 | 39.0                               | 1.96                            | 4.44    | 4.44    | 4.44    | 0.80               | 1.22                    | ± 12.0 %    |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3288

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 55.5                               | 0.96                            | 6.38    | 6.38    | 6.38    | 0.31               | 1.89                    | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 6.32    | 6.32    | 6.32    | 0.55               | 1.39                    | ± 12.0 %    |
| 1750                 | 53.4                               | 1.49                            | 5.03    | 5.03    | 5.03    | 0.57               | 1.44                    | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 4.82    | 4.82    | 4.82    | 0.51               | 1.54                    | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 4.36    | 4.36    | 4.36    | 0.71               | 1.07                    | ± 12.0 %    |
| 2600                 | 52.5                               | 2.16                            | 4.22    | 4.22    | 4.22    | 0.80               | 1.07                    | ± 12.0 %    |


<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

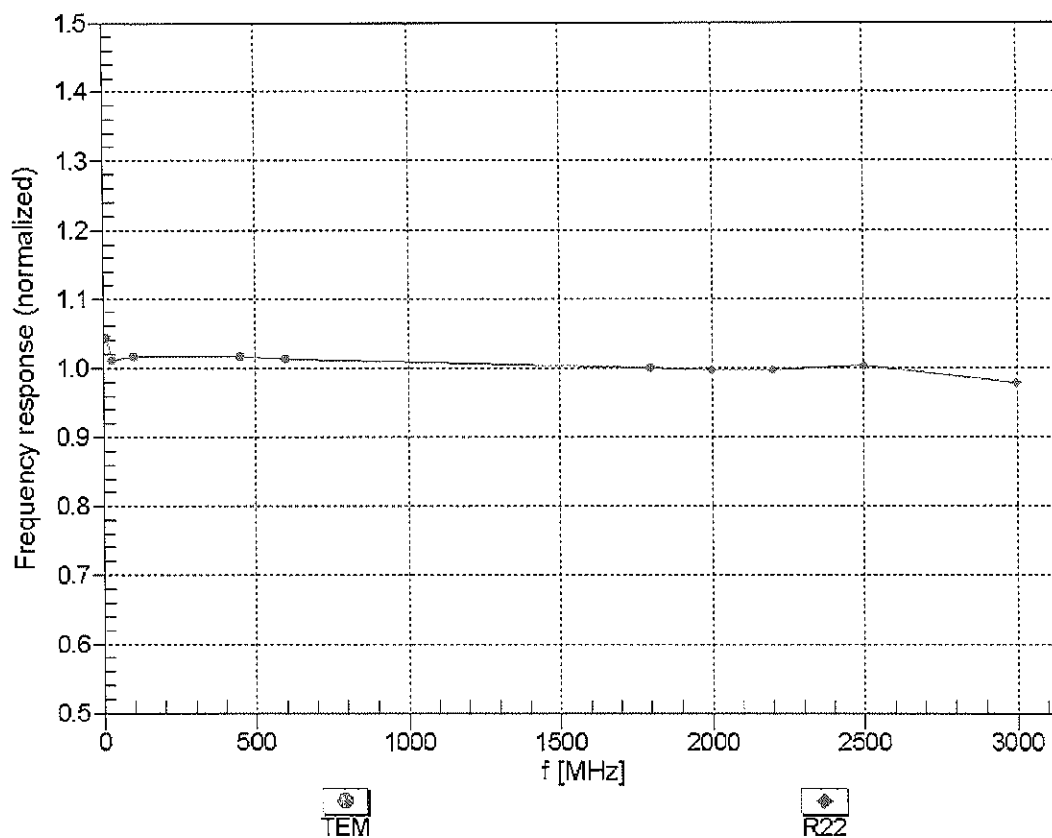


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)





## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM


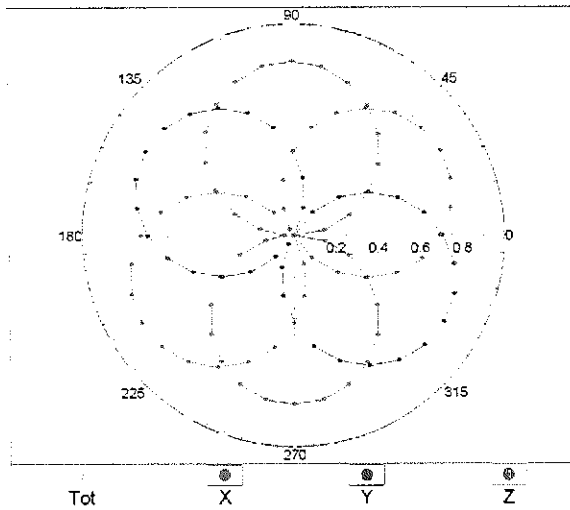


f=1800 MHz,R22

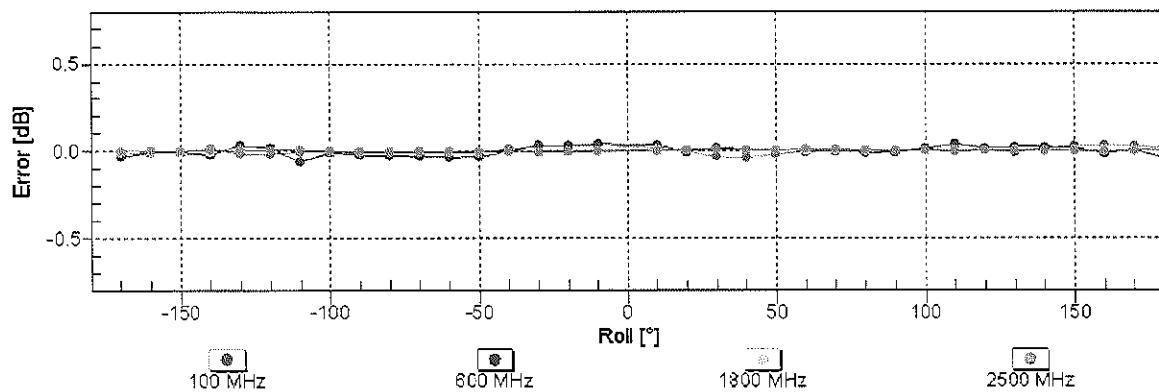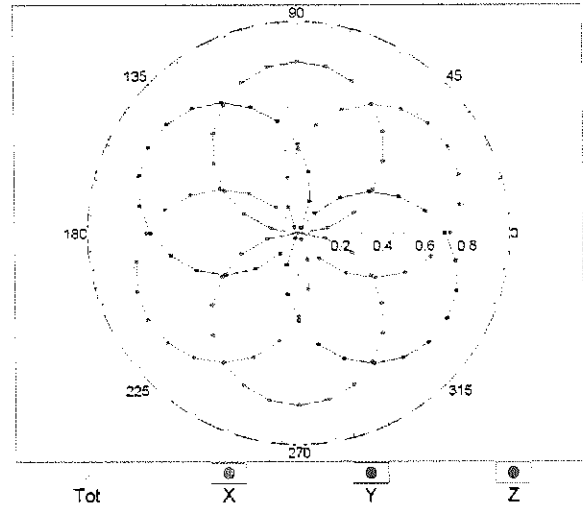


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

## Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}} = 1900 \text{ MHz}$ )

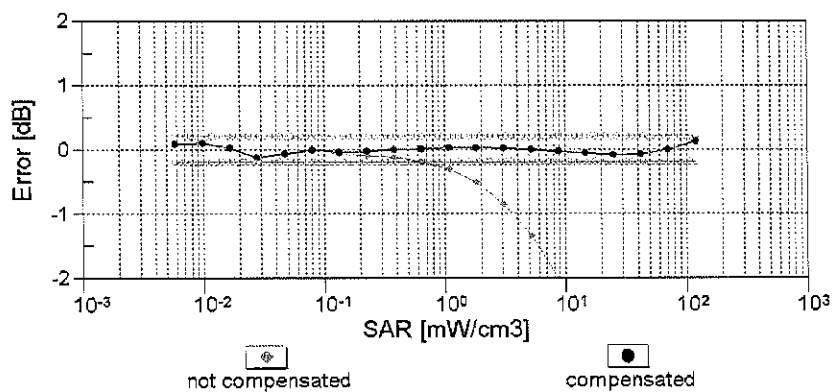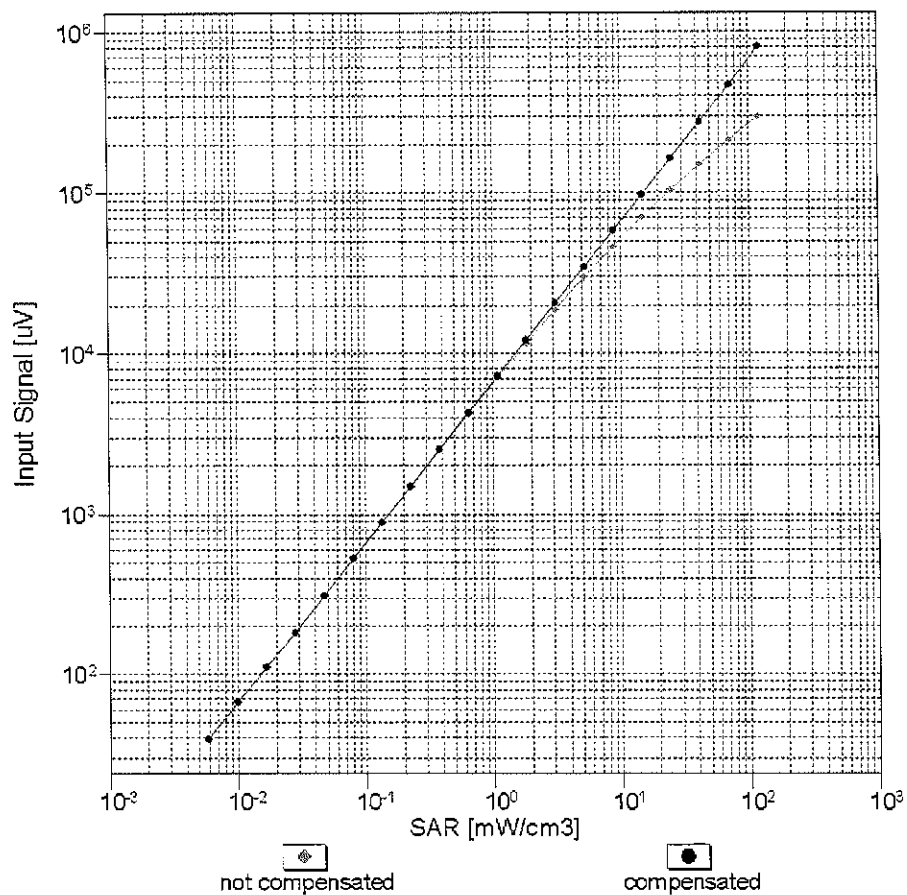



Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

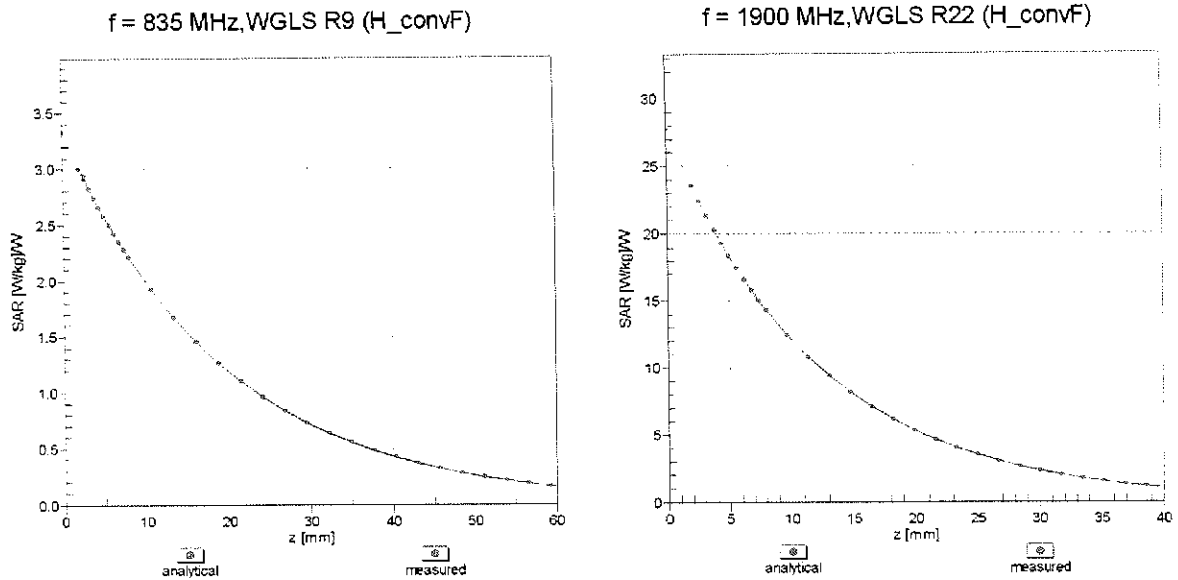

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$

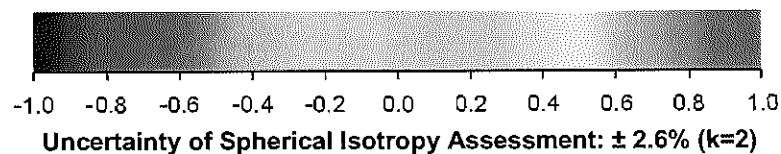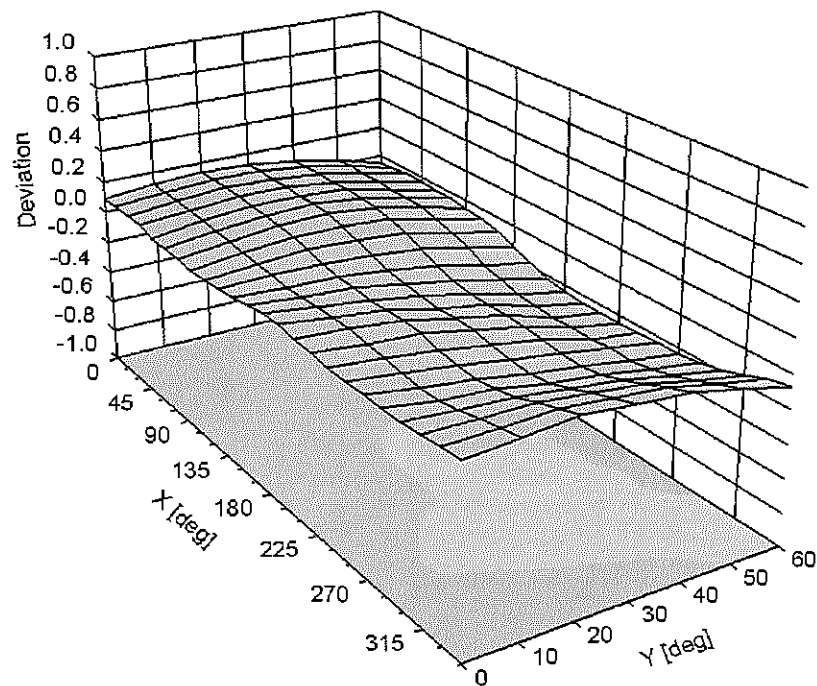

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3288

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -110       |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 10 mm      |
| Tip Diameter                                  | 4 mm       |
| Probe Tip to Sensor X Calibration Point       | 2 mm       |
| Probe Tip to Sensor Y Calibration Point       | 2 mm       |
| Probe Tip to Sensor Z Calibration Point       | 2 mm       |
| Recommended Measurement Distance from Surface | 3 mm       |



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **ES3-3318\_Jan15**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3318**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**  
**Calibration procedure for dosimetric E-field probes**

CC  
 1/30/15

Calibration date: **January 23, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 03-Apr-14 (No. 217-01911)         | Apr-15                 |
| Power sensor E4412A        | MY41498087      | 03-Apr-14 (No. 217-01911)         | Apr-15                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 03-Apr-14 (No. 217-01915)         | Apr-15                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 03-Apr-14 (No. 217-01919)         | Apr-15                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920)         | Apr-15                 |
| Reference Probe ES3DV2     | SN: 3013        | 30-Dec-14 (No. ES3-3013_Dec14)    | Dec-15                 |
| DAE4                       | SN: 660         | 14-Jan-15 (No. DAE4-660_Jan15)    | Jan-16                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-16 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

|                |                       |                                   |                          |
|----------------|-----------------------|-----------------------------------|--------------------------|
| Calibrated by: | Name<br>Israe Elnaouq | Function<br>Laboratory Technician | Signature<br>            |
| Approved by:   | Katja Pokovic         | Technical Manager                 |                          |
|                |                       |                                   | Issued: January 26, 2015 |

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                       |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe ES3DV3

## SN:3318

Manufactured: January 10, 2012  
Calibrated: January 23, 2015

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

# DASY/EASY - Parameters of Probe: ES3DV3 - SN:3318

## Basic Calibration Parameters

|                                       | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|---------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu V/(V/m)^2$ ) <sup>A</sup> | 1.15     | 0.92     | 1.28     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                 | 106.4    | 109.2    | 103.4    |               |

## Modulation Calibration Parameters

| UID       | Communication System Name                     |   | A<br>dB | B<br>dB $\sqrt{\mu V}$ | C    | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----------|-----------------------------------------------|---|---------|------------------------|------|---------|----------|---------------------------|
| 0         | CW                                            | X | 0.0     | 0.0                    | 1.0  | 0.00    | 200.6    | $\pm 3.5 \%$              |
|           |                                               | Y | 0.0     | 0.0                    | 1.0  |         | 185.3    |                           |
|           |                                               | Z | 0.0     | 0.0                    | 1.0  |         | 207.7    |                           |
| 10010-CAA | SAR Validation (Square, 100ms, 10ms)          | X | 3.26    | 66.4                   | 14.0 | 10.00   | 41.4     | $\pm 1.2 \%$              |
|           |                                               | Y | 1.76    | 59.6                   | 9.8  |         | 36.1     |                           |
|           |                                               | Z | 1.82    | 57.7                   | 9.6  |         | 43.6     |                           |
| 10011-CAB | UMTS-FDD (WCDMA)                              | X | 3.48    | 68.9                   | 19.9 | 2.91    | 120.2    | $\pm 0.5 \%$              |
|           |                                               | Y | 3.76    | 70.1                   | 19.9 |         | 146.0    |                           |
|           |                                               | Z | 3.11    | 66.0                   | 17.9 |         | 124.4    |                           |
| 10012-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)      | X | 3.71    | 74.2                   | 21.7 | 1.87    | 121.7    | $\pm 0.7 \%$              |
|           |                                               | Y | 3.65    | 73.3                   | 20.7 |         | 147.5    |                           |
|           |                                               | Z | 2.77    | 67.4                   | 17.8 |         | 126.6    |                           |
| 10013-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 10.68   | 69.5                   | 22.7 | 9.46    | 114.7    | $\pm 2.5 \%$              |
|           |                                               | Y | 10.82   | 70.4                   | 23.0 |         | 139.8    |                           |
|           |                                               | Z | 11.22   | 71.1                   | 23.7 |         | 122.2    |                           |
| 10021-DAB | GSM-FDD (TDMA, GMSK)                          | X | 16.13   | 95.0                   | 26.6 | 9.39    | 122.7    | $\pm 2.2 \%$              |
|           |                                               | Y | 4.61    | 73.1                   | 17.2 |         | 130.8    |                           |
|           |                                               | Z | 15.10   | 92.0                   | 25.4 |         | 135.9    |                           |
| 10023-DAB | GPRS-FDD (TDMA, GMSK, TN 0)                   | X | 17.03   | 96.8                   | 27.5 | 9.57    | 113.0    | $\pm 1.9 \%$              |
|           |                                               | Y | 4.15    | 71.7                   | 16.8 |         | 119.9    |                           |
|           |                                               | Z | 21.50   | 98.0                   | 27.5 |         | 130.9    |                           |
| 10024-DAB | GPRS-FDD (TDMA, GMSK, TN 0-1)                 | X | 35.51   | 99.5                   | 24.5 | 6.56    | 147.6    | $\pm 2.7 \%$              |
|           |                                               | Y | 6.12    | 77.2                   | 17.1 |         | 118.1    |                           |
|           |                                               | Z | 38.50   | 99.7                   | 24.7 |         | 114.0    |                           |
| 10027-DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2)               | X | 45.57   | 99.9                   | 23.2 | 4.80    | 113.3    | $\pm 1.7 \%$              |
|           |                                               | Y | 2.73    | 68.4                   | 12.6 |         | 133.3    |                           |
|           |                                               | Z | 54.59   | 99.9                   | 22.9 |         | 131.0    |                           |
| 10028-DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)             | X | 53.68   | 99.5                   | 21.9 | 3.55    | 123.0    | $\pm 3.0 \%$              |
|           |                                               | Y | 60.05   | 99.8                   | 21.1 |         | 144.9    |                           |
|           |                                               | Z | 66.60   | 99.6                   | 21.6 |         | 140.7    |                           |
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)           | X | 20.92   | 99.4                   | 21.8 | 1.16    | 136.6    | $\pm 2.2 \%$              |
|           |                                               | Y | 95.40   | 88.3                   | 13.8 |         | 117.6    |                           |
|           |                                               | Z | 100.00  | 99.5                   | 18.7 |         | 110.1    |                           |
| 10100-CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)      | X | 6.50    | 68.1                   | 20.2 | 5.67    | 130.5    | $\pm 1.2 \%$              |
|           |                                               | Y | 6.11    | 66.7                   | 19.2 |         | 107.2    |                           |
|           |                                               | Z | 6.55    | 68.2                   | 20.1 |         | 142.7    |                           |



|           |                                          |   |       |      |      |      |       |        |
|-----------|------------------------------------------|---|-------|------|------|------|-------|--------|
| 10103-CAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 9.76  | 74.8 | 25.9 | 9.29 | 116.0 | ±2.5 % |
|           |                                          | Y | 8.85  | 72.2 | 24.1 |      | 134.9 |        |
|           |                                          | Z | 10.83 | 77.4 | 27.2 |      | 131.5 |        |
| 10108-CAC | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 6.36  | 67.7 | 20.1 | 5.80 | 128.7 | ±1.2 % |
|           |                                          | Y | 5.92  | 66.1 | 19.0 |      | 106.6 |        |
|           |                                          | Z | 6.42  | 67.7 | 20.0 |      | 140.4 |        |
| 10117-CAB | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 10.20 | 69.1 | 21.6 | 8.07 | 118.1 | ±2.5 % |
|           |                                          | Y | 10.27 | 69.3 | 21.4 |      | 143.9 |        |
|           |                                          | Z | 10.43 | 69.7 | 21.8 |      | 131.0 |        |
| 10151-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)  | X | 9.09  | 73.7 | 25.5 | 9.28 | 112.0 | ±2.7 % |
|           |                                          | Y | 8.35  | 71.5 | 23.9 |      | 131.1 |        |
|           |                                          | Z | 9.58  | 74.4 | 25.6 |      | 126.8 |        |
| 10154-CAC | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)  | X | 6.01  | 67.0 | 19.8 | 5.75 | 126.4 | ±1.2 % |
|           |                                          | Y | 6.17  | 67.7 | 19.9 |      | 148.9 |        |
|           |                                          | Z | 6.07  | 67.1 | 19.7 |      | 137.2 |        |
| 10160-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)  | X | 6.41  | 67.4 | 19.9 | 5.82 | 130.9 | ±0.9 % |
|           |                                          | Y | 6.06  | 66.2 | 19.0 |      | 109.1 |        |
|           |                                          | Z | 6.54  | 67.7 | 20.0 |      | 142.6 |        |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)    | X | 4.79  | 66.5 | 19.8 | 5.73 | 109.4 | ±0.9 % |
|           |                                          | Y | 4.82  | 67.1 | 19.8 |      | 128.8 |        |
|           |                                          | Z | 4.85  | 66.4 | 19.5 |      | 119.0 |        |
| 10172-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)    | X | 8.44  | 79.3 | 28.7 | 9.21 | 125.1 | ±2.5 % |
|           |                                          | Y | 7.15  | 75.0 | 26.0 |      | 144.0 |        |
|           |                                          | Z | 10.13 | 83.8 | 30.8 |      | 141.9 |        |
| 10175-CAC | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)    | X | 5.13  | 68.2 | 20.8 | 5.72 | 146.5 | ±0.9 % |
|           |                                          | Y | 4.77  | 66.8 | 19.6 |      | 125.2 |        |
|           |                                          | Z | 4.81  | 66.2 | 19.4 |      | 118.5 |        |
| 10181-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)    | X | 5.11  | 68.1 | 20.7 | 5.72 | 146.4 | ±0.9 % |
|           |                                          | Y | 4.79  | 67.0 | 19.7 |      | 126.0 |        |
|           |                                          | Z | 4.88  | 66.6 | 19.7 |      | 118.9 |        |
| 10196-CAB | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)  | X | 9.63  | 68.3 | 21.2 | 8.10 | 108.2 | ±2.5 % |
|           |                                          | Y | 9.84  | 68.9 | 21.3 |      | 135.5 |        |
|           |                                          | Z | 9.99  | 69.2 | 21.7 |      | 124.0 |        |
| 10225-CAB | UMTS-FDD (HSPA+)                         | X | 6.99  | 67.3 | 19.7 | 5.97 | 134.8 | ±0.9 % |
|           |                                          | Y | 6.73  | 66.8 | 19.2 |      | 115.9 |        |
|           |                                          | Z | 6.71  | 66.2 | 19.0 |      | 106.3 |        |
| 10237-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)    | X | 7.79  | 76.4 | 27.0 | 9.21 | 126.4 | ±2.5 % |
|           |                                          | Y | 7.19  | 75.1 | 26.1 |      | 144.7 |        |
|           |                                          | Z | 10.12 | 83.9 | 30.9 |      | 142.0 |        |
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)  | X | 8.19  | 71.9 | 24.7 | 9.24 | 103.3 | ±2.2 % |
|           |                                          | Y | 7.76  | 70.8 | 23.6 |      | 122.0 |        |
|           |                                          | Z | 9.31  | 75.2 | 26.4 |      | 119.1 |        |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 8.90  | 73.0 | 25.1 | 9.30 | 108.7 | ±2.2 % |
|           |                                          | Y | 8.38  | 71.6 | 24.0 |      | 129.7 |        |
|           |                                          | Z | 10.15 | 76.5 | 26.9 |      | 126.1 |        |

|           |                                                               |   |       |      |      |      |       |        |
|-----------|---------------------------------------------------------------|---|-------|------|------|------|-------|--------|
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)                      | X | 4.42  | 67.2 | 19.2 | 3.96 | 119.1 | ±0.7 % |
|           |                                                               | Y | 4.71  | 68.5 | 19.5 |      | 143.8 |        |
|           |                                                               | Z | 4.39  | 66.7 | 18.6 |      | 131.7 |        |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate                                | X | 3.65  | 67.5 | 19.3 | 3.46 | 111.3 | ±0.5 % |
|           |                                                               | Y | 3.89  | 69.0 | 19.6 |      | 130.9 |        |
|           |                                                               | Z | 3.49  | 66.1 | 18.2 |      | 122.4 |        |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate                                | X | 3.60  | 67.6 | 19.3 | 3.39 | 114.4 | ±0.5 % |
|           |                                                               | Y | 3.85  | 69.1 | 19.7 |      | 133.4 |        |
|           |                                                               | Z | 3.45  | 66.2 | 18.2 |      | 123.7 |        |
| 10297-AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)                       | X | 6.36  | 67.6 | 20.1 | 5.81 | 128.7 | ±1.2 % |
|           |                                                               | Y | 5.95  | 66.1 | 19.0 |      | 106.5 |        |
|           |                                                               | Z | 6.39  | 67.6 | 19.9 |      | 140.7 |        |
| 10311-AAA | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)                      | X | 6.98  | 68.4 | 20.6 | 6.06 | 134.9 | ±1.2 % |
|           |                                                               | Y | 6.52  | 66.7 | 19.3 |      | 111.3 |        |
|           |                                                               | Z | 7.06  | 68.6 | 20.5 |      | 146.2 |        |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0)                                    | X | 4.97  | 69.7 | 19.7 | 3.76 | 122.2 | ±0.5 % |
|           |                                                               | Y | 5.31  | 71.6 | 20.2 |      | 143.6 |        |
|           |                                                               | Z | 4.54  | 67.3 | 18.2 |      | 133.0 |        |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A)                                    | X | 4.77  | 69.4 | 19.6 | 3.77 | 120.8 | ±0.5 % |
|           |                                                               | Y | 5.40  | 72.4 | 20.6 |      | 141.3 |        |
|           |                                                               | Z | 4.71  | 68.5 | 18.9 |      | 131.5 |        |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)     | X | 3.07  | 71.7 | 20.7 | 1.54 | 120.5 | ±0.7 % |
|           |                                                               | Y | 3.52  | 73.8 | 21.0 |      | 142.0 |        |
|           |                                                               | Z | 2.38  | 66.1 | 17.4 |      | 129.6 |        |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 9.73  | 68.3 | 21.2 | 8.23 | 114.7 | ±2.5 % |
|           |                                                               | Y | 9.99  | 69.2 | 21.5 |      | 138.0 |        |
|           |                                                               | Z | 10.10 | 69.4 | 21.9 |      | 125.3 |        |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 7 and 8).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3318

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 6.58    | 6.58    | 6.58    | 0.36               | 1.73                    | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 6.39    | 6.39    | 6.39    | 0.80               | 1.14                    | ± 12.0 %    |
| 1750                 | 40.1                               | 1.37                            | 5.27    | 5.27    | 5.27    | 0.76               | 1.19                    | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 5.05    | 5.05    | 5.05    | 0.44               | 1.55                    | ± 12.0 %    |
| 2300                 | 39.5                               | 1.67                            | 4.78    | 4.78    | 4.78    | 0.80               | 1.23                    | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 4.50    | 4.50    | 4.50    | 0.55               | 1.49                    | ± 12.0 %    |
| 2600                 | 39.0                               | 1.96                            | 4.34    | 4.34    | 4.34    | 0.76               | 1.32                    | ± 12.0 %    |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3318

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 55.5                               | 0.96                            | 6.22    | 6.22    | 6.22    | 0.67               | 1.28                    | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 6.23    | 6.23    | 6.23    | 0.80               | 1.19                    | ± 12.0 %    |
| 1750                 | 53.4                               | 1.49                            | 4.95    | 4.95    | 4.95    | 0.40               | 1.77                    | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 4.76    | 4.76    | 4.76    | 0.60               | 1.48                    | ± 12.0 %    |
| 2300                 | 52.9                               | 1.81                            | 4.52    | 4.52    | 4.52    | 0.80               | 1.19                    | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 4.37    | 4.37    | 4.37    | 0.72               | 1.23                    | ± 12.0 %    |
| 2600                 | 52.5                               | 2.16                            | 4.17    | 4.17    | 4.17    | 0.80               | 1.00                    | ± 12.0 %    |


<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

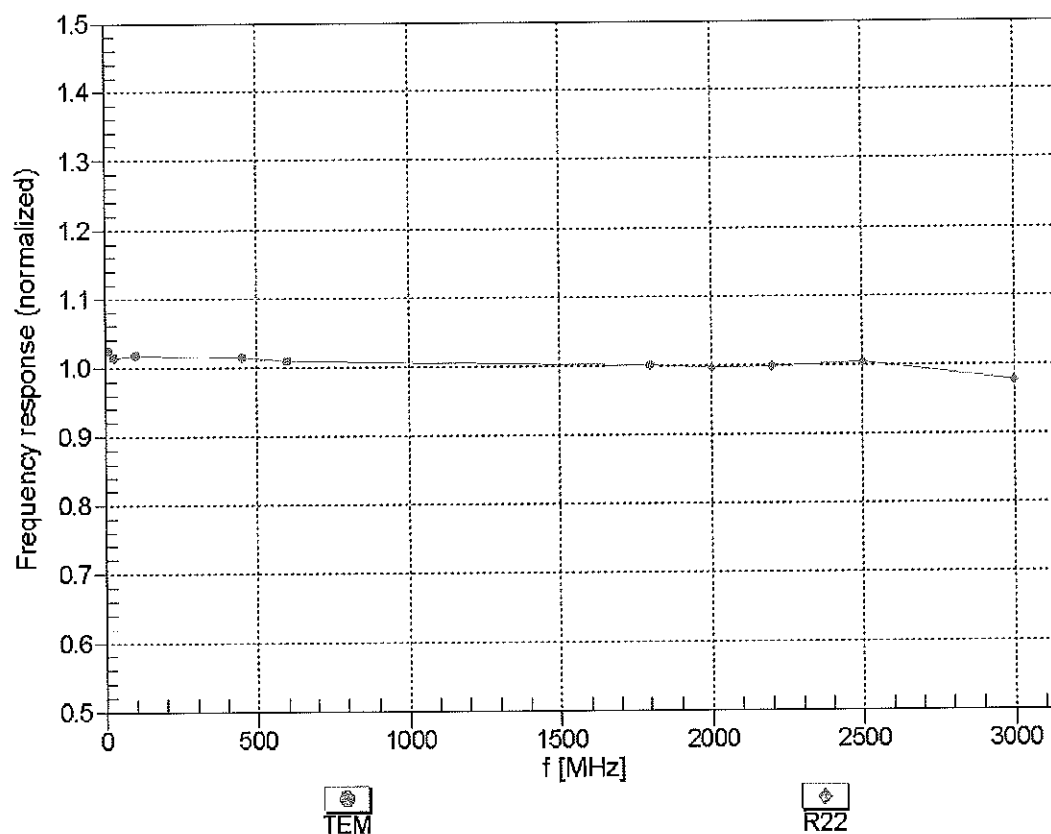



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM

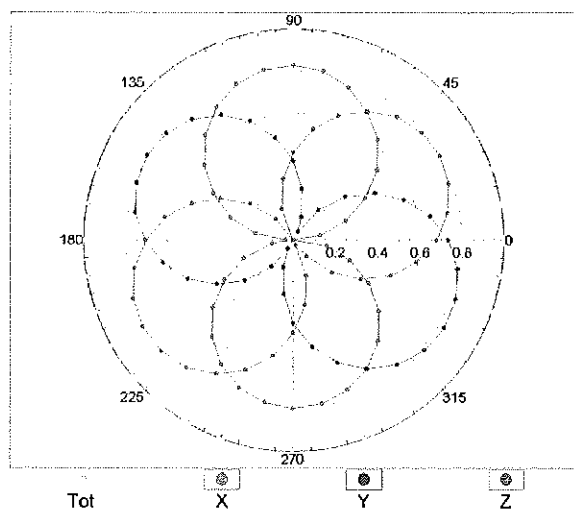


f=1800 MHz,R22

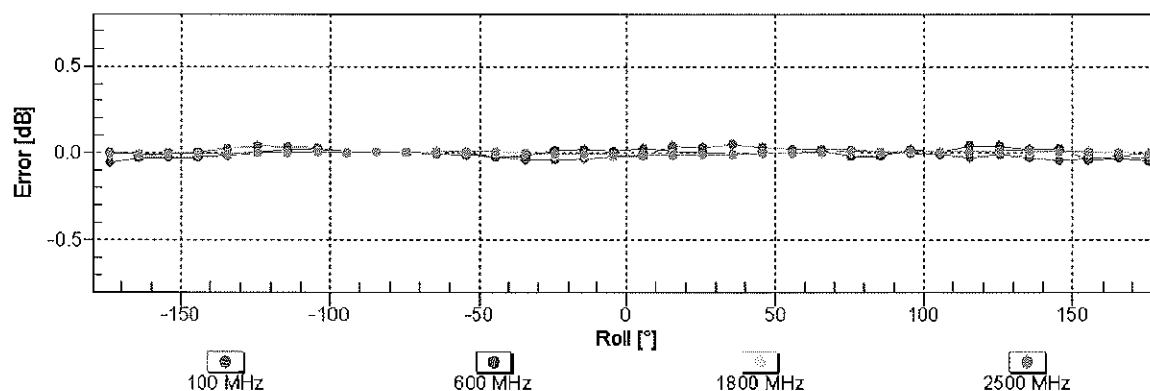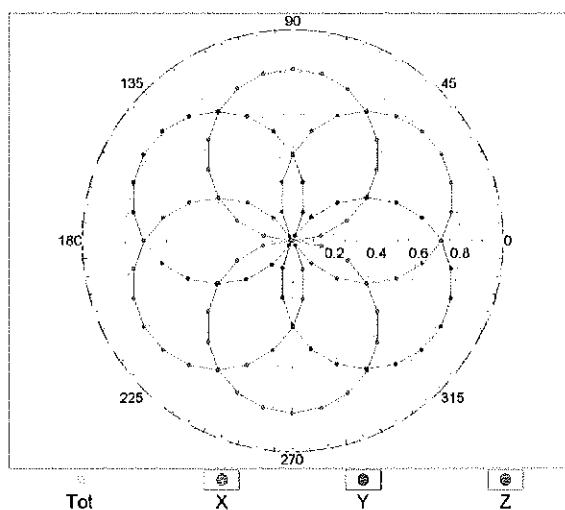

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )


# Dynamic Range f(SAR<sub>head</sub>)

(TEM cell , f<sub>eval</sub>= 1900 MHz)

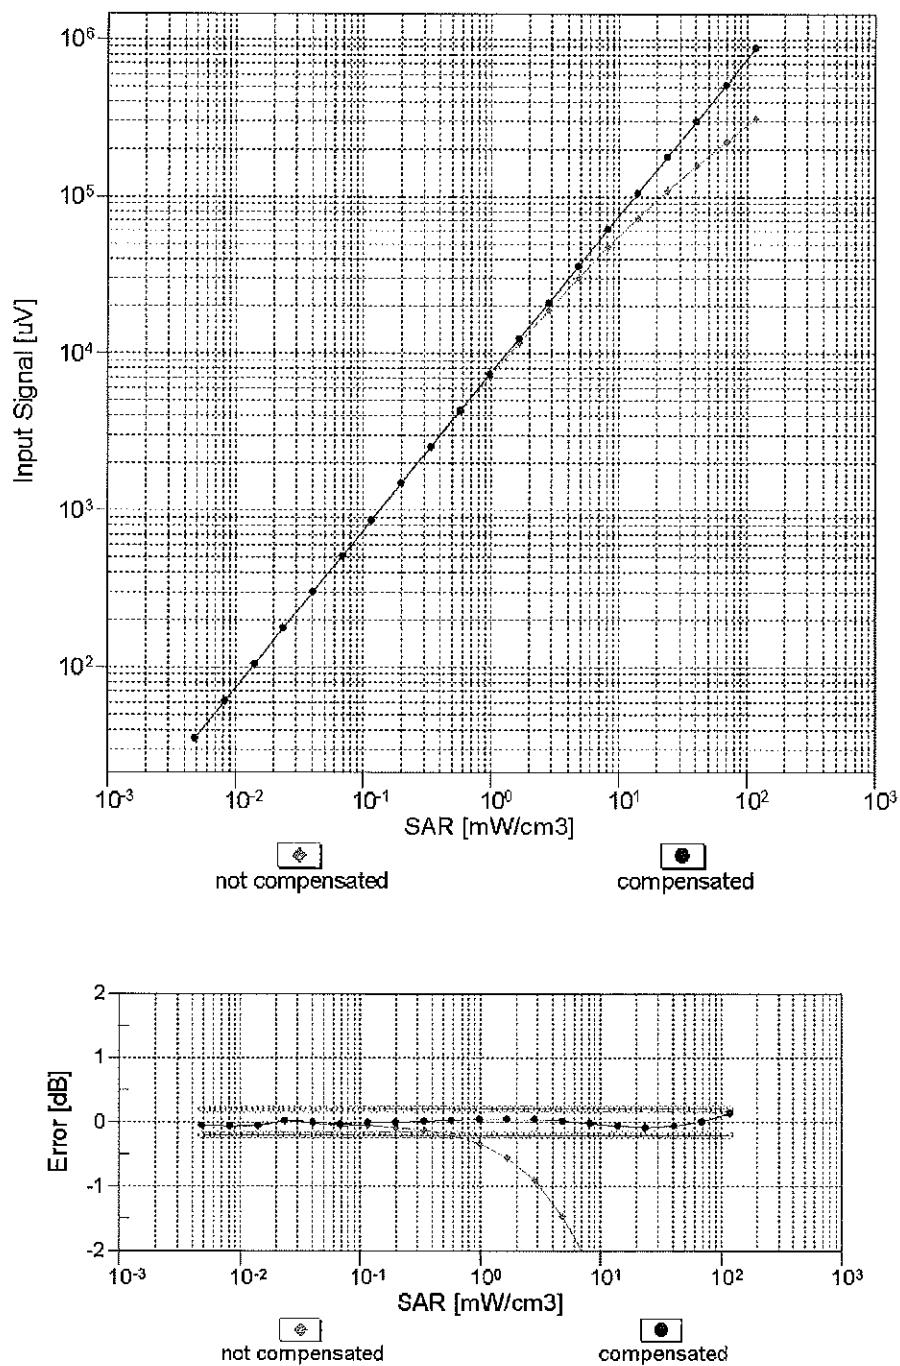



Uncertainty of Linearity Assessment:  $\pm 0.6\%$  (k=2)

## Conversion Factor Assessment

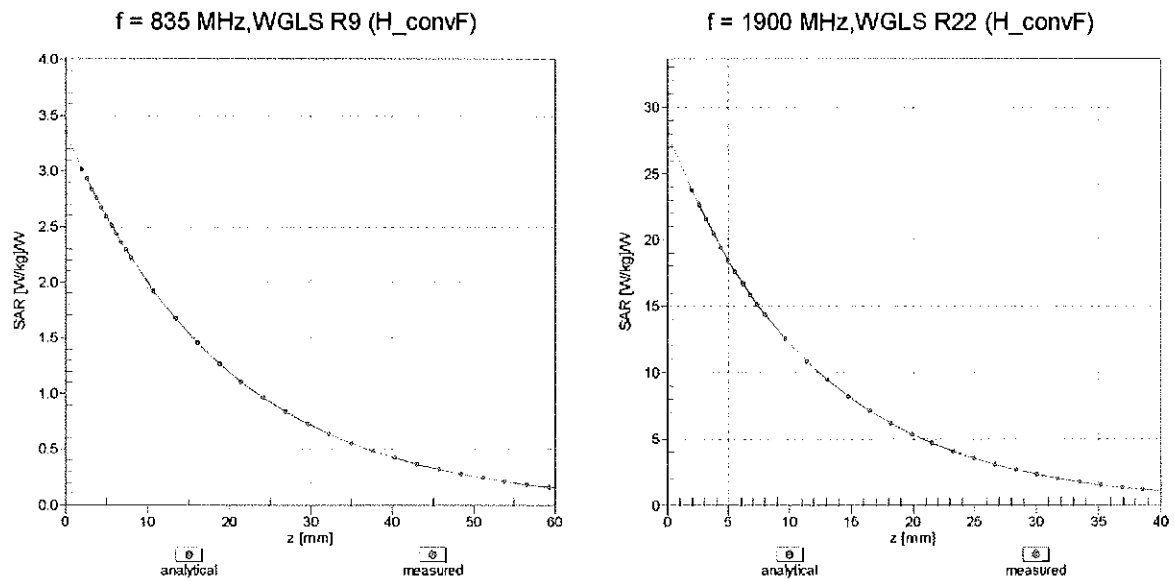

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$

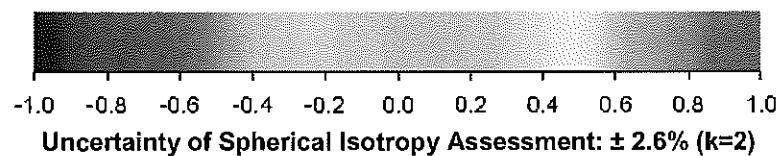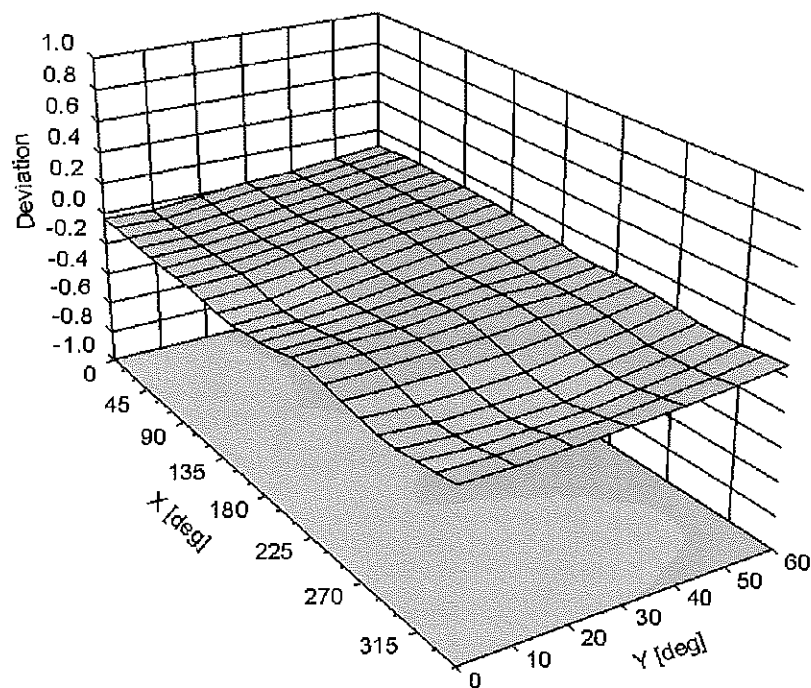



## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3318

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -104.4     |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 10 mm      |
| Tip Diameter                                  | 4 mm       |
| Probe Tip to Sensor X Calibration Point       | 2 mm       |
| Probe Tip to Sensor Y Calibration Point       | 2 mm       |
| Probe Tip to Sensor Z Calibration Point       | 2 mm       |
| Recommended Measurement Distance from Surface | 3 mm       |



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **EX3-7357\_Apr15**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:7357**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6**  
 Calibration procedure for dosimetric E-field probes

Calibration date: **April 23, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 01-Apr-15 (No. 217-02128)         | Mar-16                 |
| Power sensor E4412A        | MY41498087      | 01-Apr-15 (No. 217-02128)         | Mar-16                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 01-Apr-15 (No. 217-02129)         | Mar-16                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 01-Apr-15 (No. 217-02132)         | Mar-16                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 01-Apr-15 (No. 217-02133)         | Mar-16                 |
| Reference Probe ES3DV2     | SN: 3013        | 30-Dec-14 (No. ES3-3013_Dec14)    | Dec-15                 |
| DAE4                       | SN: 660         | 14-Jan-15 (No. DAE4-660_Jan15)    | Jan-16                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-16 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

|                |                                |                                          |               |
|----------------|--------------------------------|------------------------------------------|---------------|
| Calibrated by: | Name<br><b>Claudio Leubler</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:   | <b>Katja Pokovic</b>           | <b>Technical Manager</b>                 |               |

Issued: April 23, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                       |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe EX3DV4

## SN:7357

Manufactured: February 5, 2015  
Calibrated: April 23, 2015

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

# DASY/EASY - Parameters of Probe: EX3DV4 - SN:7357

## Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.41     | 0.49     | 0.42     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 103.9    | 96.9     | 101.6    |               |

## Modulation Calibration Parameters

| UID           | Communication System Name                     |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C     | D<br>dB | VR<br>mV | Unc <sup>F</sup><br>(k=2) |
|---------------|-----------------------------------------------|---|---------|------------------------------|-------|---------|----------|---------------------------|
| 0             | CW                                            | X | 0.0     | 0.0                          | 1.0   | 0.00    | 146.9    | $\pm 3.3 \%$              |
|               |                                               | Y | 0.0     | 0.0                          | 1.0   |         | 157.7    |                           |
|               |                                               | Z | 0.0     | 0.0                          | 1.0   |         | 138.2    |                           |
| 10010-<br>CAA | SAR Validation (Square, 100ms, 10ms)          | X | 0.83    | 57.1                         | 8.0   | 10.00   | 45.6     | $\pm 0.7 \%$              |
|               |                                               | Y | 1.12    | 59.0                         | 9.6   |         | 45.6     |                           |
|               |                                               | Z | 0.93    | 58.4                         | 8.9   |         | 43.4     |                           |
| 10012-<br>CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)      | X | 3.61    | 73.9                         | 21.5  | 1.87    | 133.3    | $\pm 0.9 \%$              |
|               |                                               | Y | 2.64    | 66.3                         | 17.3  |         | 127.2    |                           |
|               |                                               | Z | 3.06    | 70.4                         | 19.9  |         | 149.2    |                           |
| 10013-<br>CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 10.42   | 68.9                         | 22.1  | 9.46    | 142.7    | $\pm 3.3 \%$              |
|               |                                               | Y | 10.68   | 69.5                         | 22.6  |         | 140.9    |                           |
|               |                                               | Z | 10.33   | 68.6                         | 21.9  |         | 134.3    |                           |
| 10032-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)           | X | 0.06    | 0.0                          | 100.0 | 1.16    | 149.4    | $\pm 3.5 \%$              |
|               |                                               | Y | 0.26    | 57.7                         | 4.5   |         | 143.7    |                           |
|               |                                               | Z | 0.05    | 0.6                          | 100.0 |         | 143.3    |                           |
| 10062-<br>CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)      | X | 10.19   | 68.8                         | 21.5  | 8.68    | 144.0    | $\pm 3.5 \%$              |
|               |                                               | Y | 10.40   | 69.2                         | 21.8  |         | 145.6    |                           |
|               |                                               | Z | 10.11   | 68.5                         | 21.4  |         | 138.3    |                           |
| 10103-<br>CAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)      | X | 7.21    | 67.1                         | 21.4  | 9.29    | 132.3    | $\pm 1.9 \%$              |
|               |                                               | Y | 7.94    | 69.4                         | 22.8  |         | 136.4    |                           |
|               |                                               | Z | 7.15    | 66.8                         | 21.3  |         | 145.0    |                           |
| 10117-<br>CAB | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)      | X | 10.10   | 68.5                         | 20.9  | 8.07    | 131.3    | $\pm 2.5 \%$              |
|               |                                               | Y | 10.12   | 68.3                         | 20.8  |         | 128.9    |                           |
|               |                                               | Z | 9.95    | 68.0                         | 20.6  |         | 124.4    |                           |
| 10151-<br>CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)       | X | 6.97    | 67.1                         | 21.5  | 9.28    | 148.9    | $\pm 1.9 \%$              |
|               |                                               | Y | 7.50    | 68.7                         | 22.5  |         | 130.8    |                           |
|               |                                               | Z | 6.89    | 66.6                         | 21.3  |         | 141.8    |                           |
| 10172-<br>CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)         | X | 5.57    | 68.9                         | 22.9  | 9.21    | 141.8    | $\pm 1.9 \%$              |
|               |                                               | Y | 5.84    | 69.6                         | 23.4  |         | 139.9    |                           |
|               |                                               | Z | 5.43    | 68.1                         | 22.5  |         | 134.4    |                           |
| 10196-<br>CAB | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)       | X | 9.69    | 68.2                         | 20.8  | 8.10    | 124.8    | $\pm 3.3 \%$              |
|               |                                               | Y | 10.09   | 69.0                         | 21.4  |         | 148.5    |                           |
|               |                                               | Z | 9.90    | 68.6                         | 21.1  |         | 143.9    |                           |
| 10237-<br>CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)         | X | 5.57    | 69.0                         | 22.9  | 9.21    | 140.3    | $\pm 1.9 \%$              |
|               |                                               | Y | 5.85    | 69.6                         | 23.4  |         | 141.2    |                           |
|               |                                               | Z | 5.43    | 68.0                         | 22.4  |         | 133.8    |                           |

|           |                                                               |   |       |      |      |      |       |        |
|-----------|---------------------------------------------------------------|---|-------|------|------|------|-------|--------|
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)                       | X | 6.62  | 67.0 | 21.6 | 9.24 | 143.6 | ±2.2 % |
|           |                                                               | Y | 7.21  | 68.9 | 22.9 |      | 144.8 |        |
|           |                                                               | Z | 6.54  | 66.4 | 21.3 |      | 137.3 |        |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)                      | X | 7.00  | 67.1 | 21.6 | 9.30 | 149.1 | ±1.9 % |
|           |                                                               | Y | 7.52  | 68.7 | 22.6 |      | 128.6 |        |
|           |                                                               | Z | 6.91  | 66.6 | 21.3 |      | 142.7 |        |
| 10317-AAB | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)       | X | 9.81  | 68.2 | 21.0 | 8.36 | 123.5 | ±3.3 % |
|           |                                                               | Y | 10.26 | 69.1 | 21.6 |      | 148.1 |        |
|           |                                                               | Z | 10.06 | 68.7 | 21.3 |      | 144.2 |        |
| 10400-AAB | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)           | X | 9.88  | 68.2 | 21.0 | 8.37 | 123.6 | ±2.7 % |
|           |                                                               | Y | 9.94  | 68.1 | 21.0 |      | 124.7 |        |
|           |                                                               | Z | 10.15 | 68.8 | 21.3 |      | 144.7 |        |
| 10401-AAB | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)           | X | 10.61 | 68.7 | 21.2 | 8.60 | 132.4 | ±3.0 % |
|           |                                                               | Y | 10.82 | 69.0 | 21.5 |      | 134.7 |        |
|           |                                                               | Z | 10.54 | 68.4 | 21.1 |      | 126.8 |        |
| 10402-AAB | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)           | X | 10.66 | 68.6 | 21.1 | 8.53 | 133.5 | ±3.0 % |
|           |                                                               | Y | 11.03 | 69.4 | 21.5 |      | 136.6 |        |
|           |                                                               | Z | 10.56 | 68.3 | 20.9 |      | 126.5 |        |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)     | X | 4.15  | 76.8 | 22.5 | 1.54 | 130.0 | ±0.9 % |
|           |                                                               | Y | 2.63  | 66.8 | 17.4 |      | 129.6 |        |
|           |                                                               | Z | 3.25  | 72.3 | 20.7 |      | 147.1 |        |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 9.99  | 68.7 | 21.2 | 8.23 | 146.6 | ±3.3 % |
|           |                                                               | Y | 10.19 | 69.0 | 21.5 |      | 149.3 |        |
|           |                                                               | Z | 9.96  | 68.6 | 21.2 |      | 141.2 |        |
| 10417-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)     | X | 10.02 | 68.8 | 21.3 | 8.23 | 148.2 | ±2.7 % |
|           |                                                               | Y | 9.78  | 68.0 | 20.9 |      | 124.2 |        |
|           |                                                               | Z | 9.96  | 68.6 | 21.2 |      | 142.5 |        |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 6 and 7).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7357

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 2450                 | 39.2                               | 1.80                            | 7.31    | 7.31    | 7.31    | 0.36               | 0.80                    | ± 12.0 %    |
| 2600                 | 39.0                               | 1.96                            | 7.06    | 7.06    | 7.06    | 0.38               | 0.80                    | ± 12.0 %    |
| 5200                 | 36.0                               | 4.66                            | 5.14    | 5.14    | 5.14    | 0.40               | 1.80                    | ± 13.1 %    |
| 5300                 | 35.9                               | 4.76                            | 4.93    | 4.93    | 4.93    | 0.40               | 1.80                    | ± 13.1 %    |
| 5500                 | 35.6                               | 4.96                            | 4.70    | 4.70    | 4.70    | 0.40               | 1.80                    | ± 13.1 %    |
| 5600                 | 35.5                               | 5.07                            | 4.38    | 4.38    | 4.38    | 0.45               | 1.80                    | ± 13.1 %    |
| 5800                 | 35.3                               | 5.27                            | 4.41    | 4.41    | 4.41    | 0.45               | 1.80                    | ± 13.1 %    |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7357

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 2450                 | 52.7                               | 1.95                            | 6.95    | 6.95    | 6.95    | 0.26               | 0.99                    | ± 12.0 %    |
| 2600                 | 52.5                               | 2.16                            | 6.68    | 6.68    | 6.68    | 0.28               | 0.99                    | ± 12.0 %    |
| 5200                 | 49.0                               | 5.30                            | 4.27    | 4.27    | 4.27    | 0.50               | 1.90                    | ± 13.1 %    |
| 5300                 | 48.9                               | 5.42                            | 4.11    | 4.11    | 4.11    | 0.50               | 1.90                    | ± 13.1 %    |
| 5500                 | 48.6                               | 5.65                            | 3.83    | 3.83    | 3.83    | 0.50               | 1.90                    | ± 13.1 %    |
| 5600                 | 48.5                               | 5.77                            | 3.72    | 3.72    | 3.72    | 0.55               | 1.90                    | ± 13.1 %    |
| 5800                 | 48.2                               | 6.00                            | 3.82    | 3.82    | 3.82    | 0.55               | 1.90                    | ± 13.1 %    |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



## Frequency Response of E-Field


(TEM-Cell: ifi110 EXX, Waveguide: R22)

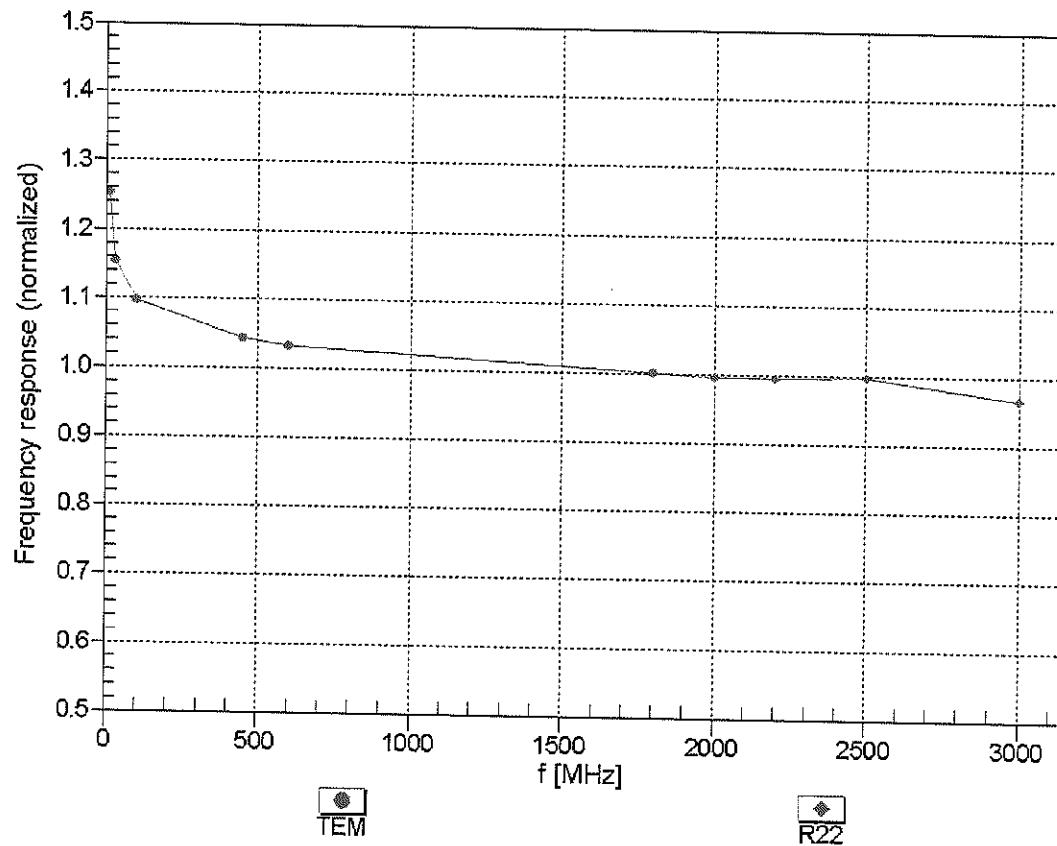



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

## Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

f=600 MHz,TEM


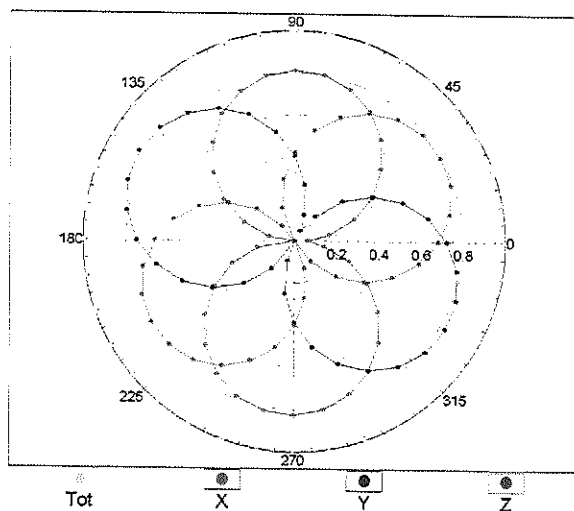


f=1800 MHz,R22

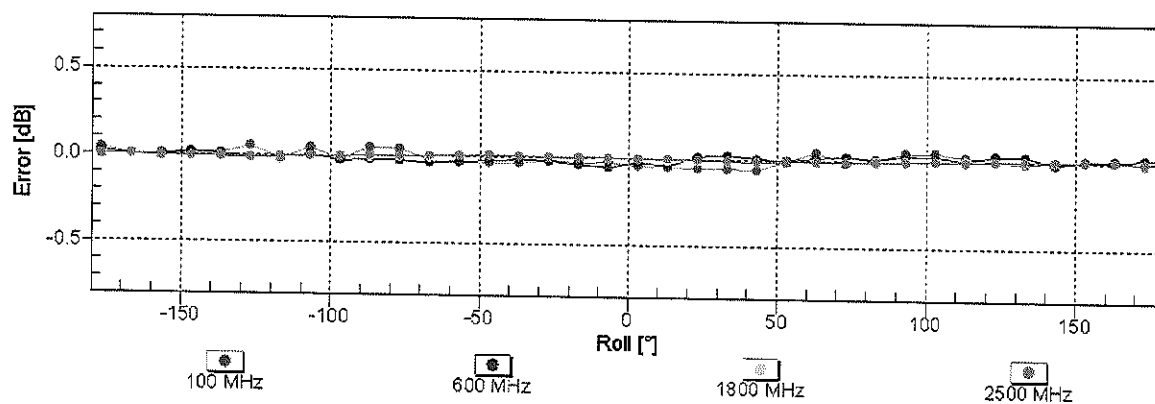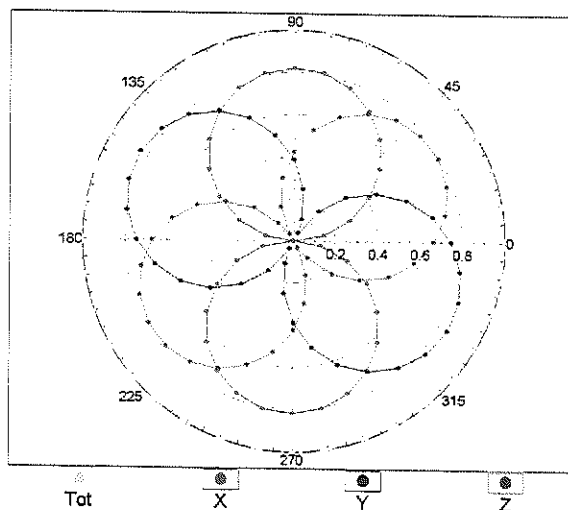


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

# Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$ )

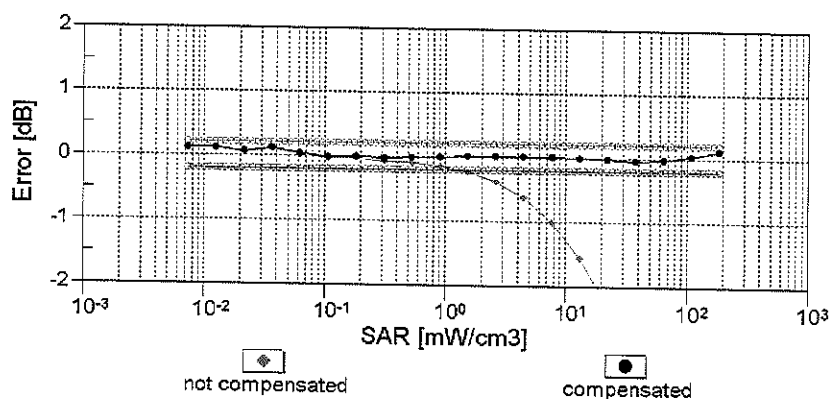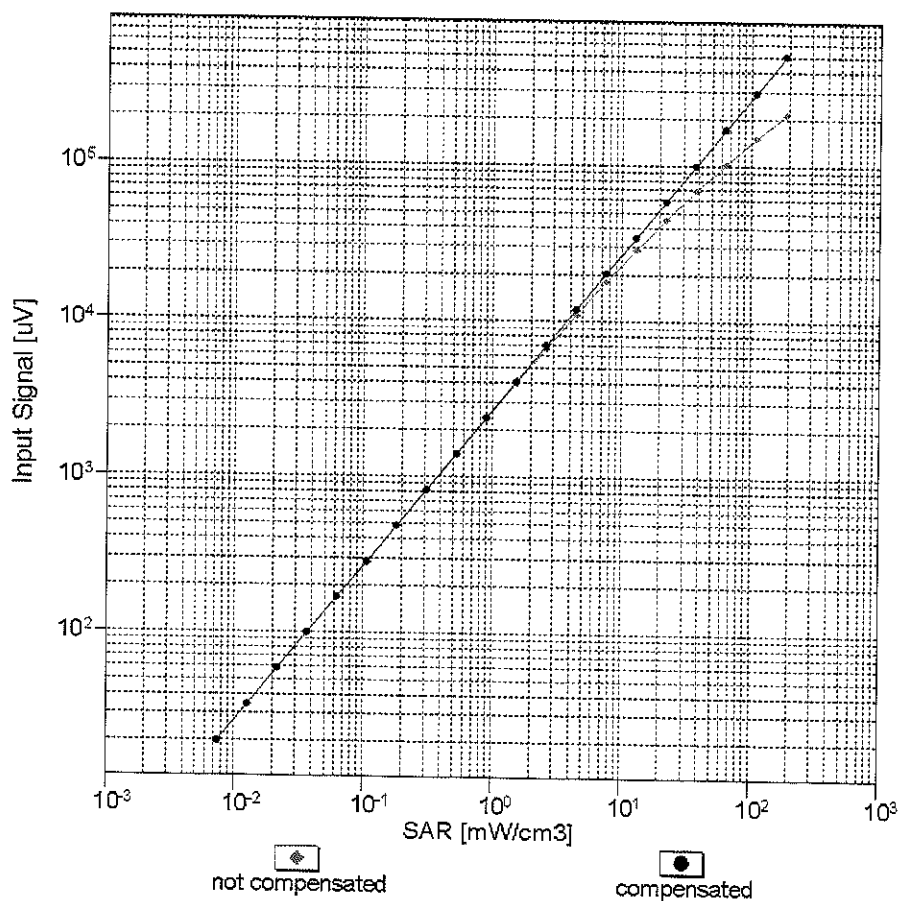



Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

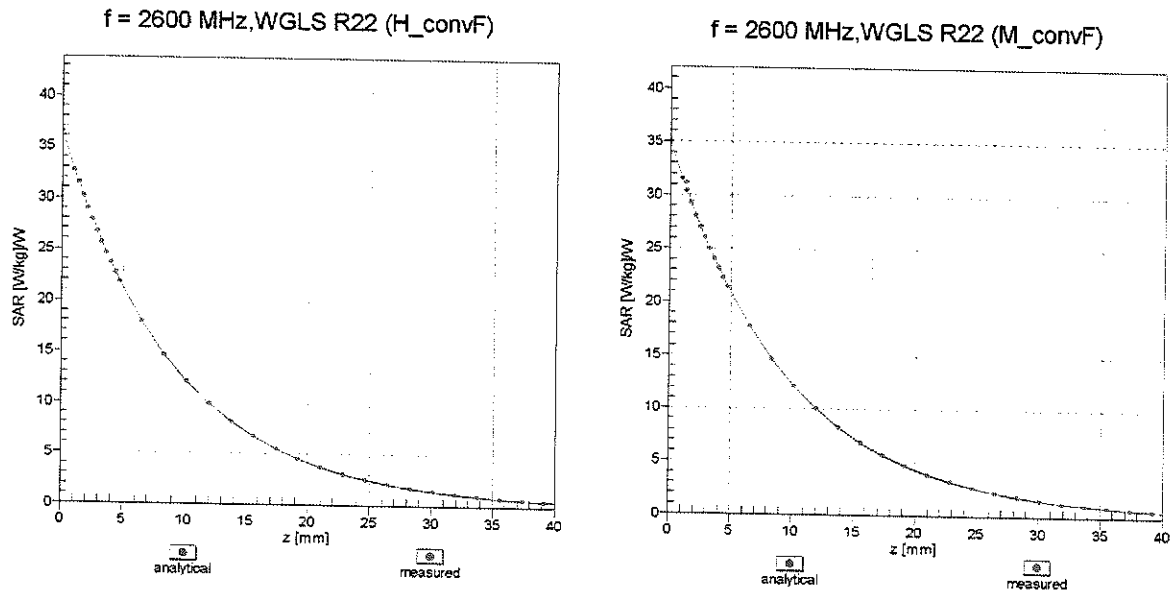

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$

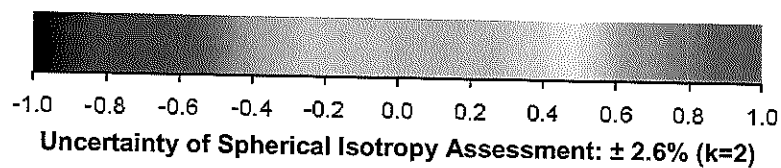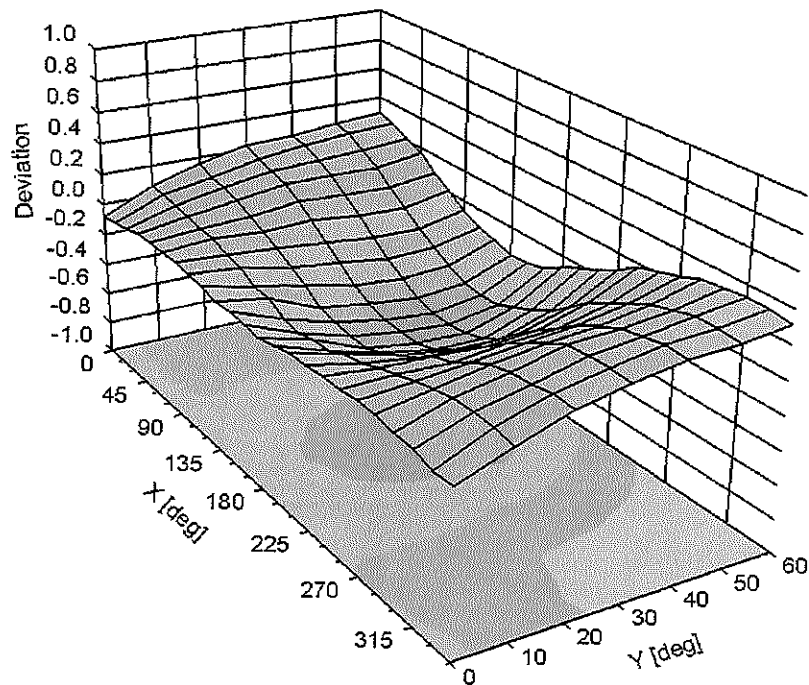

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7357

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | 13.1       |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 9 mm       |
| Tip Diameter                                  | 2.5 mm     |
| Probe Tip to Sensor X Calibration Point       | 1 mm       |
| Probe Tip to Sensor Y Calibration Point       | 1 mm       |
| Probe Tip to Sensor Z Calibration Point       | 1 mm       |
| Recommended Measurement Distance from Surface | 1.4 mm     |



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **ES3-3209\_Mar15**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3209**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**  
**Calibration procedure for dosimetric E-field probes**

Calibration date: **March 19, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 03-Apr-14 (No. 217-01911)         | Apr-15                 |
| Power sensor E4412A        | MY41498087      | 03-Apr-14 (No. 217-01911)         | Apr-15                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 03-Apr-14 (No. 217-01915)         | Apr-15                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 03-Apr-14 (No. 217-01919)         | Apr-15                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920)         | Apr-15                 |
| Reference Probe ES3DV2     | SN: 3013        | 30-Dec-14 (No. ES3-3013_Dec14)    | Dec-15                 |
| DAE4                       | SN: 660         | 14-Jan-15 (No. DAE4-660_Jan15)    | Jan-16                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-16 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

|                |                              |                                          |               |
|----------------|------------------------------|------------------------------------------|---------------|
| Calibrated by: | Name<br><b>Israe Elnaouq</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:   | <b>Katja Pokovic</b>         | <b>Technical Manager</b>                 |               |

Issued: March 19, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\varphi$   | $\varphi$ rotation around probe axis                                                                                                                    |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the  $E^2$ -field uncertainty inside TSL (see below *ConvF*).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe ES3DV3

## SN:3209

Manufactured: October 14, 2008  
Calibrated: March 19, 2015

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)



# DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

## Basic Calibration Parameters

|                                       | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---------------------------------------|----------|----------|----------|-----------|
| Norm ( $\mu V/(V/m)^2$ ) <sup>A</sup> | 1.35     | 1.33     | 1.14     | ± 10.1 %  |
| DCP (mV) <sup>B</sup>                 | 102.0    | 100.9    | 103.3    |           |

## Modulation Calibration Parameters

| UID           | Communication System Name                     |   | A<br>dB | B<br>dB $\sqrt{\mu V}$ | C    | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|---------------|-----------------------------------------------|---|---------|------------------------|------|---------|----------|---------------------------|
| 0             | CW                                            | X | 0.0     | 0.0                    | 1.0  | 0.00    | 214.5    | ±3.5 %                    |
|               |                                               | Y | 0.0     | 0.0                    | 1.0  |         | 192.6    |                           |
|               |                                               | Z | 0.0     | 0.0                    | 1.0  |         | 199.1    |                           |
| 10010-<br>CAA | SAR Validation (Square, 100ms, 10ms)          | X | 2.61    | 65.1                   | 12.2 | 10.00   | 42.3     | ±1.7 %                    |
|               |                                               | Y | 1.39    | 57.8                   | 8.9  |         | 42.7     |                           |
|               |                                               | Z | 4.57    | 70.3                   | 14.0 |         | 38.3     |                           |
| 10011-<br>CAB | UMTS-FDD (WCDMA)                              | X | 3.12    | 66.3                   | 18.1 | 2.91    | 130.3    | ±0.7 %                    |
|               |                                               | Y | 3.08    | 65.6                   | 17.5 |         | 132.2    |                           |
|               |                                               | Z | 3.32    | 67.7                   | 19.0 |         | 137.6    |                           |
| 10012-<br>CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)      | X | 2.54    | 66.8                   | 17.8 | 1.87    | 131.1    | ±0.7 %                    |
|               |                                               | Y | 2.67    | 67.1                   | 17.7 |         | 131.6    |                           |
|               |                                               | Z | 2.85    | 69.2                   | 19.1 |         | 138.0    |                           |
| 10013-<br>CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 10.78   | 70.5                   | 23.4 | 9.46    | 146.9    | ±2.7 %                    |
|               |                                               | Y | 10.39   | 69.2                   | 22.5 |         | 123.5    |                           |
|               |                                               | Z | 10.50   | 69.9                   | 23.1 |         | 128.4    |                           |
| 10021-<br>DAB | GSM-FDD (TDMA, GMSK)                          | X | 3.65    | 74.2                   | 17.7 | 9.39    | 130.0    | ±1.9 %                    |
|               |                                               | Y | 6.62    | 83.5                   | 22.0 |         | 149.4    |                           |
|               |                                               | Z | 4.25    | 76.8                   | 19.2 |         | 136.2    |                           |
| 10023-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0)                   | X | 3.95    | 75.3                   | 18.4 | 9.57    | 138.8    | ±2.5 %                    |
|               |                                               | Y | 4.99    | 78.2                   | 19.8 |         | 143.3    |                           |
|               |                                               | Z | 4.11    | 75.8                   | 18.9 |         | 129.3    |                           |
| 10024-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0-1)                 | X | 6.44    | 80.3                   | 17.7 | 6.56    | 135.0    | ±1.7 %                    |
|               |                                               | Y | 3.76    | 73.7                   | 16.0 |         | 144.2    |                           |
|               |                                               | Z | 11.61   | 88.5                   | 20.7 |         | 148.0    |                           |
| 10027-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2)               | X | 43.77   | 99.9                   | 21.8 | 4.80    | 131.8    | ±1.7 %                    |
|               |                                               | Y | 13.95   | 87.5                   | 19.0 |         | 142.7    |                           |
|               |                                               | Z | 39.96   | 99.9                   | 22.1 |         | 145.6    |                           |
| 10028-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)             | X | 62.88   | 99.8                   | 20.4 | 3.55    | 144.5    | ±2.2 %                    |
|               |                                               | Y | 2.45    | 70.4                   | 12.9 |         | 130.3    |                           |
|               |                                               | Z | 80.83   | 99.9                   | 19.9 |         | 135.1    |                           |
| 10032-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)           | X | 0.32    | 58.4                   | 4.3  | 1.16    | 144.1    | ±1.9 %                    |
|               |                                               | Y | 16.25   | 79.9                   | 12.1 |         | 129.5    |                           |
|               |                                               | Z | 95.90   | 91.1                   | 14.4 |         | 134.6    |                           |
| 10100-<br>CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)      | X | 6.32    | 67.4                   | 19.8 | 5.67    | 138.3    | ±1.4 %                    |
|               |                                               | Y | 6.35    | 67.3                   | 19.5 |         | 144.4    |                           |
|               |                                               | Z | 6.20    | 67.1                   | 19.6 |         | 127.7    |                           |

|           |                                          |   |       |      |      |      |       |        |
|-----------|------------------------------------------|---|-------|------|------|------|-------|--------|
| 10103-CAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 8.72  | 73.1 | 25.3 | 9.29 | 138.6 | ±2.7 % |
|           |                                          | Y | 8.88  | 72.9 | 24.9 |      | 147.9 |        |
|           |                                          | Z | 8.48  | 72.3 | 24.9 |      | 127.4 |        |
| 10108-CAC | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 6.14  | 66.9 | 19.6 | 5.80 | 136.2 | ±1.7 % |
|           |                                          | Y | 6.20  | 66.8 | 19.4 |      | 142.8 |        |
|           |                                          | Z | 6.10  | 66.8 | 19.6 |      | 126.2 |        |
| 10117-CAB | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 10.05 | 68.9 | 21.4 | 8.07 | 126.8 | ±2.2 % |
|           |                                          | Y | 9.98  | 68.5 | 21.1 |      | 132.4 |        |
|           |                                          | Z | 10.23 | 69.4 | 21.7 |      | 140.4 |        |
| 10151-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)  | X | 8.16  | 72.2 | 25.0 | 9.28 | 133.6 | ±2.7 % |
|           |                                          | Y | 8.33  | 72.0 | 24.5 |      | 142.6 |        |
|           |                                          | Z | 8.40  | 73.1 | 25.6 |      | 147.5 |        |
| 10154-CAC | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)  | X | 5.83  | 66.5 | 19.4 | 5.75 | 133.1 | ±1.4 % |
|           |                                          | Y | 5.89  | 66.3 | 19.2 |      | 139.3 |        |
|           |                                          | Z | 6.00  | 67.2 | 19.9 |      | 146.5 |        |
| 10160-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)  | X | 6.26  | 66.9 | 19.6 | 5.82 | 138.8 | ±1.7 % |
|           |                                          | Y | 6.34  | 67.0 | 19.5 |      | 145.1 |        |
|           |                                          | Z | 6.22  | 66.9 | 19.7 |      | 128.8 |        |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)    | X | 4.77  | 66.7 | 19.8 | 5.73 | 135.9 | ±1.4 % |
|           |                                          | Y | 4.89  | 66.6 | 19.5 |      | 141.8 |        |
|           |                                          | Z | 4.85  | 66.8 | 19.9 |      | 128.3 |        |
| 10172-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)    | X | 6.77  | 75.0 | 26.9 | 9.21 | 144.2 | ±2.5 % |
|           |                                          | Y | 6.56  | 72.6 | 25.2 |      | 131.1 |        |
|           |                                          | Z | 6.68  | 74.0 | 26.4 |      | 137.1 |        |
| 10175-CAC | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)    | X | 4.80  | 66.9 | 19.9 | 5.72 | 135.2 | ±1.4 % |
|           |                                          | Y | 4.87  | 66.5 | 19.5 |      | 140.6 |        |
|           |                                          | Z | 5.03  | 67.7 | 20.4 |      | 149.4 |        |
| 10181-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)    | X | 4.77  | 66.7 | 19.8 | 5.72 | 134.7 | ±1.2 % |
|           |                                          | Y | 4.88  | 66.5 | 19.5 |      | 140.6 |        |
|           |                                          | Z | 4.84  | 66.8 | 19.9 |      | 127.8 |        |
| 10196-CAB | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)  | X | 9.97  | 69.5 | 21.9 | 8.10 | 145.2 | ±2.2 % |
|           |                                          | Y | 9.60  | 68.2 | 21.0 |      | 125.1 |        |
|           |                                          | Z | 9.80  | 69.1 | 21.7 |      | 133.9 |        |
| 10225-CAB | UMTS-FDD (HSPA+)                         | X | 6.95  | 67.5 | 19.8 | 5.97 | 147.3 | ±1.4 % |
|           |                                          | Y | 6.73  | 66.4 | 19.1 |      | 128.7 |        |
|           |                                          | Z | 6.89  | 67.4 | 19.8 |      | 137.2 |        |
| 10237-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)    | X | 6.85  | 75.4 | 27.2 | 9.21 | 146.0 | ±2.5 % |
|           |                                          | Y | 6.54  | 72.5 | 25.1 |      | 131.6 |        |
|           |                                          | Z | 6.76  | 74.4 | 26.6 |      | 138.2 |        |
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)  | X | 7.58  | 71.3 | 24.6 | 9.24 | 126.6 | ±2.5 % |
|           |                                          | Y | 7.73  | 71.1 | 24.2 |      | 133.3 |        |
|           |                                          | Z | 7.82  | 72.4 | 25.3 |      | 139.0 |        |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 8.18  | 72.2 | 25.1 | 9.30 | 133.6 | ±2.7 % |
|           |                                          | Y | 8.35  | 72.0 | 24.6 |      | 141.1 |        |
|           |                                          | Z | 8.42  | 73.2 | 25.6 |      | 147.0 |        |

|           |                                                               |   |       |      |      |      |       |        |
|-----------|---------------------------------------------------------------|---|-------|------|------|------|-------|--------|
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)                      | X | 4.22  | 66.1 | 18.4 | 3.96 | 128.8 | ±0.9 % |
|           |                                                               | Y | 4.24  | 65.9 | 18.1 |      | 133.8 |        |
|           |                                                               | Z | 4.39  | 67.1 | 19.0 |      | 141.7 |        |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate                                | X | 3.51  | 66.7 | 18.6 | 3.46 | 140.9 | ±0.7 % |
|           |                                                               | Y | 3.52  | 66.2 | 18.1 |      | 143.4 |        |
|           |                                                               | Z | 3.58  | 67.2 | 19.0 |      | 131.7 |        |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate                                | X | 3.45  | 66.7 | 18.5 | 3.39 | 142.0 | ±0.7 % |
|           |                                                               | Y | 3.50  | 66.4 | 18.2 |      | 146.9 |        |
|           |                                                               | Z | 3.61  | 67.8 | 19.3 |      | 132.2 |        |
| 10297-AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)                       | X | 6.15  | 66.9 | 19.6 | 5.81 | 136.3 | ±1.4 % |
|           |                                                               | Y | 6.20  | 66.8 | 19.4 |      | 140.3 |        |
|           |                                                               | Z | 6.11  | 66.8 | 19.6 |      | 126.6 |        |
| 10311-AAA | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)                      | X | 6.80  | 67.8 | 20.1 | 6.06 | 143.2 | ±1.7 % |
|           |                                                               | Y | 6.80  | 67.5 | 19.9 |      | 147.4 |        |
|           |                                                               | Z | 6.71  | 67.6 | 20.1 |      | 131.9 |        |
| 10400-AAB | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)           | X | 10.31 | 70.0 | 22.4 | 8.37 | 147.9 | ±3.0 % |
|           |                                                               | Y | 9.88  | 68.5 | 21.3 |      | 127.2 |        |
|           |                                                               | Z | 10.13 | 69.5 | 22.1 |      | 135.8 |        |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0)                                    | X | 4.60  | 68.6 | 18.9 | 3.76 | 128.2 | ±0.5 % |
|           |                                                               | Y | 4.58  | 67.9 | 18.4 |      | 134.2 |        |
|           |                                                               | Z | 4.86  | 69.6 | 19.5 |      | 142.6 |        |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A)                                    | X | 4.57  | 68.9 | 19.1 | 3.77 | 149.7 | ±0.5 % |
|           |                                                               | Y | 4.51  | 68.0 | 18.5 |      | 132.3 |        |
|           |                                                               | Z | 4.78  | 69.6 | 19.5 |      | 140.3 |        |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)     | X | 2.47  | 67.0 | 17.9 | 1.54 | 128.1 | ±0.7 % |
|           |                                                               | Y | 2.46  | 66.4 | 17.4 |      | 132.5 |        |
|           |                                                               | Z | 2.72  | 69.1 | 19.2 |      | 140.6 |        |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 10.12 | 69.7 | 22.1 | 8.23 | 146.8 | ±2.7 % |
|           |                                                               | Y | 9.66  | 68.2 | 21.1 |      | 125.0 |        |
|           |                                                               | Z | 9.91  | 69.2 | 21.8 |      | 134.3 |        |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 7 and 8).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 6.34    | 6.34    | 6.34    | 0.29               | 2.02                    | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 6.04    | 6.04    | 6.04    | 0.23               | 2.57                    | ± 12.0 %    |
| 1750                 | 40.1                               | 1.37                            | 5.23    | 5.23    | 5.23    | 0.80               | 1.08                    | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 5.05    | 5.05    | 5.05    | 0.10               | 2.40                    | ± 12.0 %    |
| 2300                 | 39.5                               | 1.67                            | 4.76    | 4.76    | 4.76    | 0.70               | 1.27                    | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 4.53    | 4.53    | 4.53    | 0.80               | 1.22                    | ± 12.0 %    |
| 2600                 | 39.0                               | 1.96                            | 4.36    | 4.36    | 4.36    | 0.75               | 1.31                    | ± 12.0 %    |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

### Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 55.5                               | 0.96                            | 6.12    | 6.12    | 6.12    | 0.34               | 1.81                    | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 6.07    | 6.07    | 6.07    | 0.37               | 1.79                    | ± 12.0 %    |
| 1750                 | 53.4                               | 1.49                            | 4.86    | 4.86    | 4.86    | 0.67               | 1.43                    | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 4.57    | 4.57    | 4.57    | 0.57               | 1.53                    | ± 12.0 %    |
| 2300                 | 52.9                               | 1.81                            | 4.28    | 4.28    | 4.28    | 0.80               | 1.19                    | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 4.12    | 4.12    | 4.12    | 0.72               | 1.15                    | ± 12.0 %    |
| 2600                 | 52.5                               | 2.16                            | 3.92    | 3.92    | 3.92    | 0.80               | 1.10                    | ± 12.0 %    |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


**Frequency Response of E-Field**  
(TEM-Cell:ifi110 EXX, Waveguide: R22)

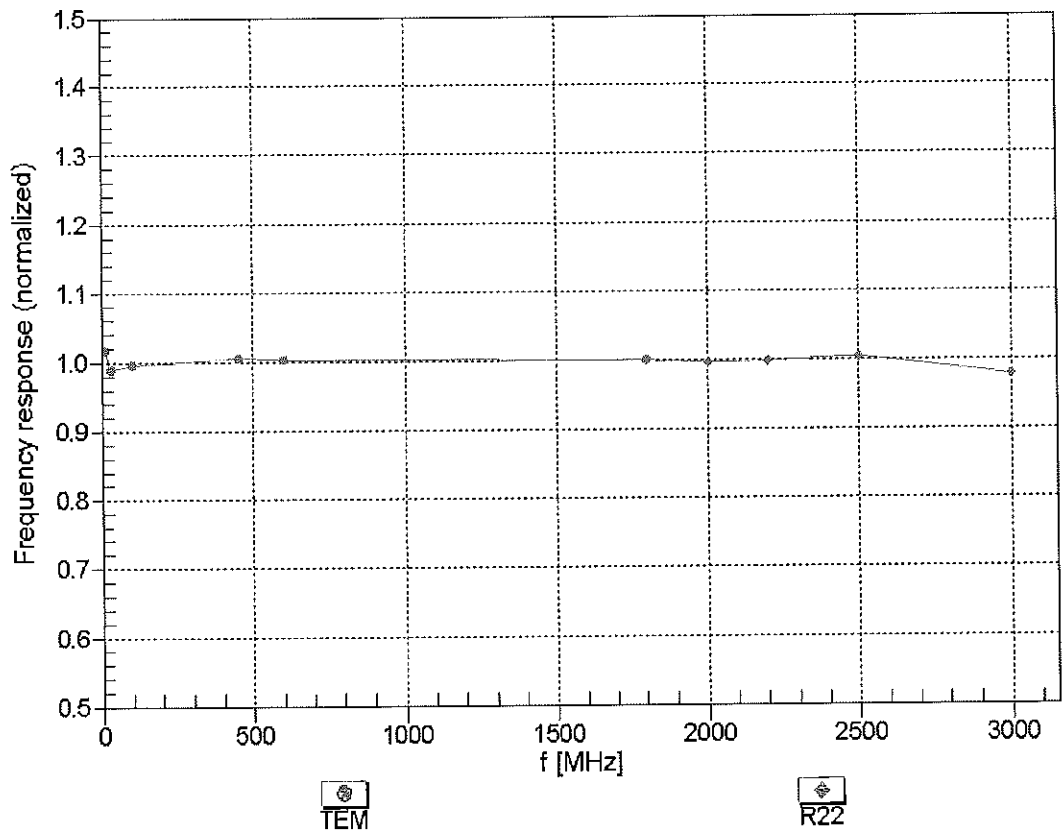



**Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)**

## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM


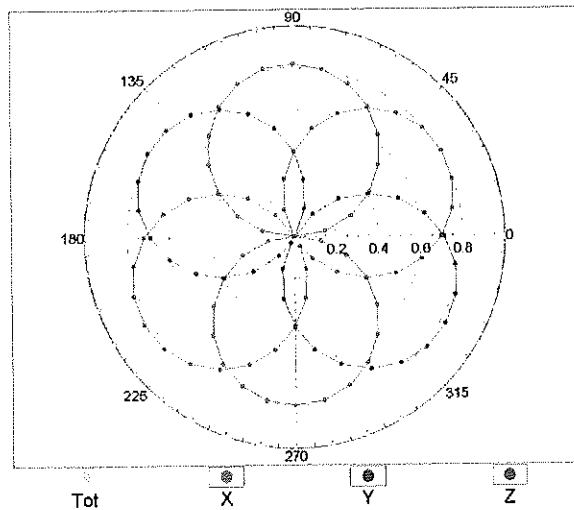


f=1800 MHz,R22

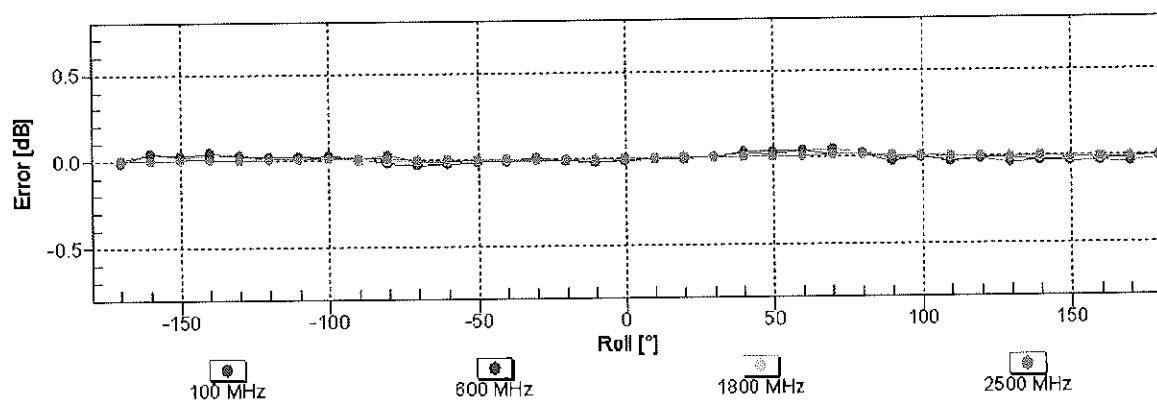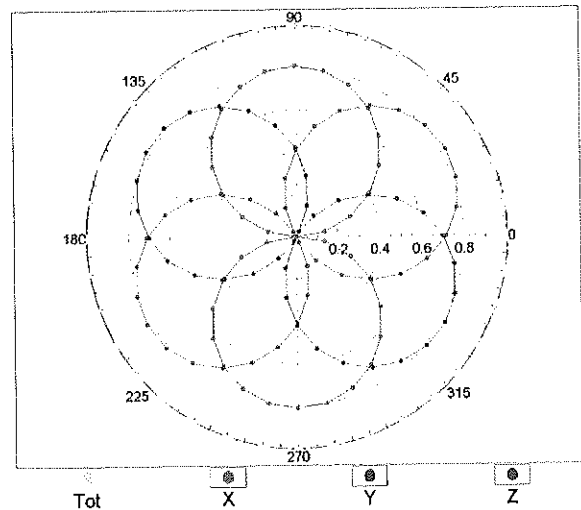

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )


**Dynamic Range f(SAR<sub>head</sub>)**  
(TEM cell , f<sub>eval</sub>= 1900 MHz)

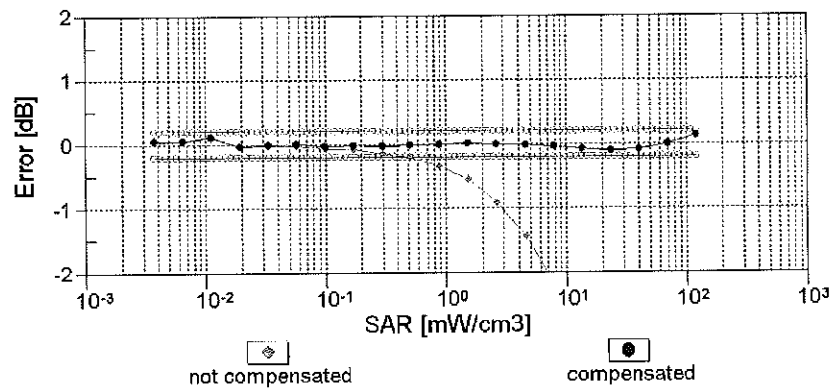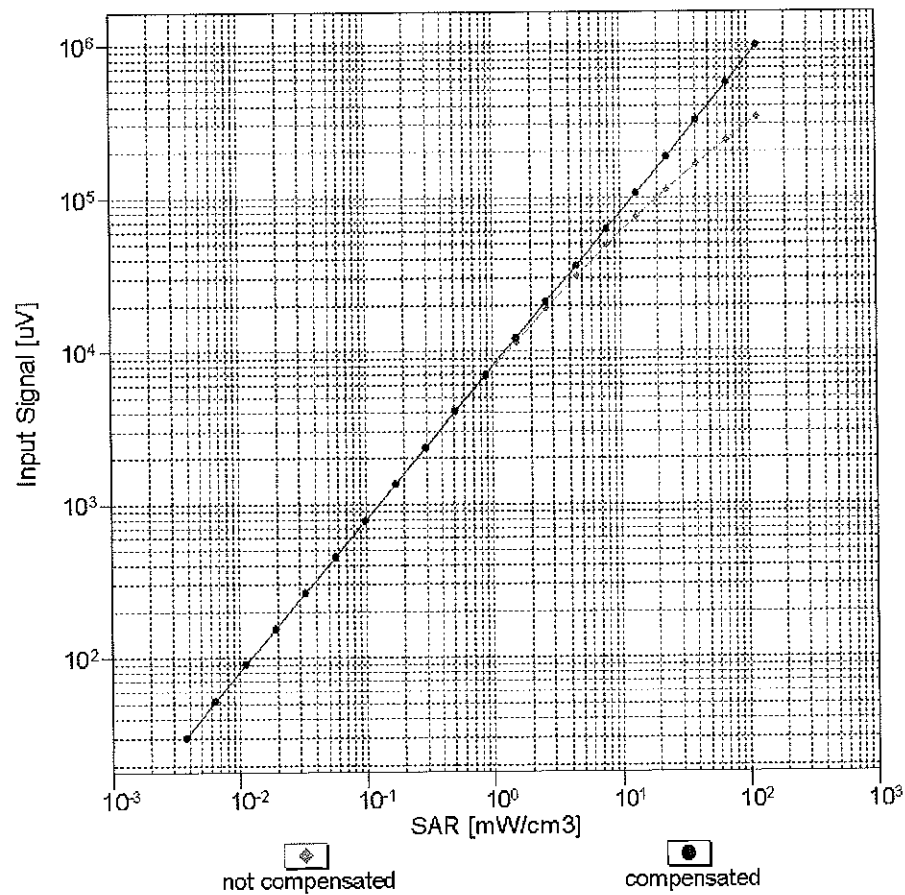


**Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )**



# Conversion Factor Assessment

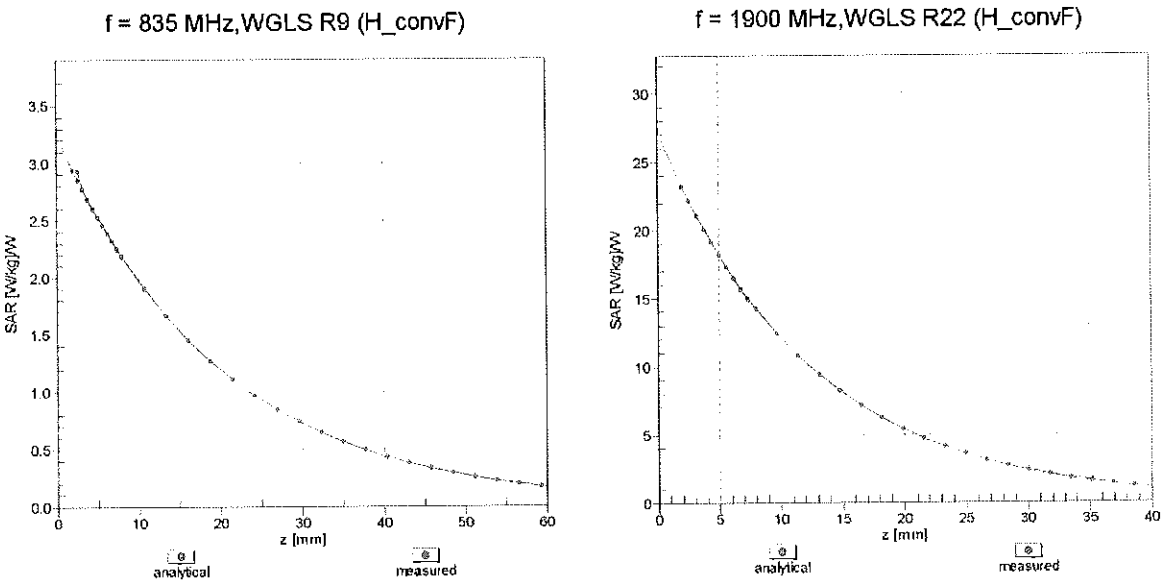

## Deviation from Isotropy in Liquid Error ( $\phi$ , $\theta$ ), f = 900 MHz

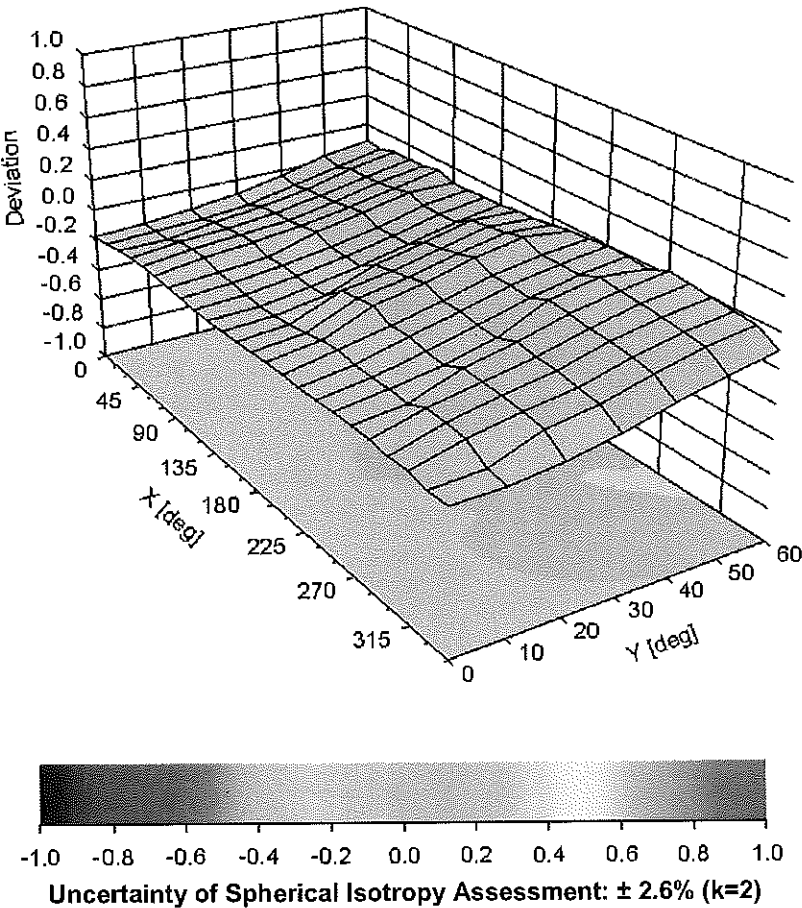

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3209

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -40.3      |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 10 mm      |
| Tip Diameter                                  | 4 mm       |
| Probe Tip to Sensor X Calibration Point       | 2 mm       |
| Probe Tip to Sensor Y Calibration Point       | 2 mm       |
| Probe Tip to Sensor Z Calibration Point       | 2 mm       |
| Recommended Measurement Distance from Surface | 3 mm       |



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **ES3-3258\_Feb15**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3258**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**  
**Calibration procedure for dosimetric E-field probes**

PN ✓  
3/6/15

Calibration date: **February 27, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 03-Apr-14 (No. 217-01911)         | Apr-15                 |
| Power sensor E4412A        | MY41498087      | 03-Apr-14 (No. 217-01911)         | Apr-15                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 03-Apr-14 (No. 217-01915)         | Apr-15                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 03-Apr-14 (No. 217-01919)         | Apr-15                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920)         | Apr-15                 |
| Reference Probe ES3DV2     | SN: 3013        | 30-Dec-14 (No. ES3-3013_Dec14)    | Dec-15                 |
| DAE4                       | SN: 660         | 14-Jan-15 (No. DAE4-660_Jan15)    | Jan-16                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-16 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

|                                                                                                                 |                                |                                          |                           |
|-----------------------------------------------------------------------------------------------------------------|--------------------------------|------------------------------------------|---------------------------|
| Calibrated by:                                                                                                  | Name<br><b>Claudio Leubler</b> | Function<br><b>Laboratory Technician</b> | Signature<br>             |
| Approved by:                                                                                                    | <b>Katja Pokovic</b>           | <b>Technical Manager</b>                 |                           |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |                                |                                          | Issued: February 27, 2015 |



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                       |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# DASY/EASY - Parameters of Probe: ES3DV3 - SN:3258

## Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 1.29     | 1.17     | 1.01     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 101.9    | 104.5    | 92.0     |               |

## Modulation Calibration Parameters

| UID           | Communication System Name                     |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C    | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|---------------|-----------------------------------------------|---|---------|------------------------------|------|---------|----------|---------------------------|
| 0             | CW                                            | X | 0.0     | 0.0                          | 1.0  | 0.00    | 186.8    | $\pm 3.0 \%$              |
|               |                                               | Y | 0.0     | 0.0                          | 1.0  |         | 179.5    |                           |
|               |                                               | Z | 0.0     | 0.0                          | 1.0  |         | 198.4    |                           |
| 10010-<br>CAA | SAR Validation (Square, 100ms, 10ms)          | X | 4.70    | 64.5                         | 13.6 | 10.00   | 43.6     | $\pm 2.2 \%$              |
|               |                                               | Y | 1.69    | 57.9                         | 9.8  |         | 40.8     |                           |
|               |                                               | Z | 1.36    | 61.6                         | 10.5 |         | 58.3     |                           |
| 10011-<br>CAB | UMTS-FDD (WCDMA)                              | X | 3.23    | 66.3                         | 18.0 | 2.91    | 131.8    | $\pm 1.2 \%$              |
|               |                                               | Y | 3.40    | 67.3                         | 18.3 |         | 140.6    |                           |
|               |                                               | Z | 3.40    | 67.4                         | 19.0 |         | 139.4    |                           |
| 10012-<br>CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)      | X | 2.96    | 67.7                         | 17.9 | 1.87    | 134.2    | $\pm 0.7 \%$              |
|               |                                               | Y | 3.06    | 69.0                         | 18.5 |         | 141.2    |                           |
|               |                                               | Z | 2.58    | 67.5                         | 18.9 |         | 138.1    |                           |
| 10013-<br>CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 12.10   | 72.1                         | 24.0 | 9.46    | 139.7    | $\pm 3.3 \%$              |
|               |                                               | Y | 11.17   | 70.7                         | 23.2 |         | 138.6    |                           |
|               |                                               | Z | 11.13   | 70.3                         | 23.5 |         | 139.1    |                           |
| 10021-<br>DAB | GSM-FDD (TDMA, GMSK)                          | X | 29.84   | 99.9                         | 28.9 | 9.39    | 130.2    | $\pm 1.9 \%$              |
|               |                                               | Y | 10.50   | 86.9                         | 23.8 |         | 142.5    |                           |
|               |                                               | Z | 2.45    | 67.0                         | 12.9 |         | 144.1    |                           |
| 10023-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0)                   | X | 28.34   | 99.7                         | 29.1 | 9.57    | 119.3    | $\pm 3.3 \%$              |
|               |                                               | Y | 10.00   | 85.7                         | 23.2 |         | 131.8    |                           |
|               |                                               | Z | 3.08    | 71.4                         | 16.0 |         | 138.3    |                           |
| 10024-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0-1)                 | X | 44.08   | 99.6                         | 25.8 | 6.56    | 118.9    | $\pm 2.5 \%$              |
|               |                                               | Y | 11.63   | 85.2                         | 20.7 |         | 147.3    |                           |
|               |                                               | Z | 25.69   | 99.7                         | 23.4 |         | 141.6    |                           |
| 10027-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2)               | X | 57.19   | 100.0                        | 24.3 | 4.80    | 127.3    | $\pm 1.7 \%$              |
|               |                                               | Y | 46.70   | 99.7                         | 23.1 |         | 141.3    |                           |
|               |                                               | Z | 11.63   | 87.8                         | 18.3 |         | 135.6    |                           |
| 10028-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)             | X | 63.03   | 99.9                         | 23.1 | 3.55    | 132.4    | $\pm 1.7 \%$              |
|               |                                               | Y | 43.32   | 97.5                         | 21.5 |         | 149.6    |                           |
|               |                                               | Z | 0.59    | 59.3                         | 4.9  |         | 148.4    |                           |
| 10032-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)           | X | 79.78   | 100.0                        | 20.4 | 1.16    | 137.7    | $\pm 1.9 \%$              |
|               |                                               | Y | 95.25   | 97.5                         | 18.1 |         | 139.0    |                           |
|               |                                               | Z | 0.21    | 58.7                         | 2.5  |         | 149.8    |                           |
| 10100-<br>CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)      | X | 6.64    | 68.2                         | 20.0 | 5.67    | 146.3    | $\pm 1.4 \%$              |
|               |                                               | Y | 6.22    | 66.7                         | 19.1 |         | 127.5    |                           |
|               |                                               | Z | 6.65    | 67.9                         | 20.3 |         | 129.0    |                           |

|           |                                          |   |       |      |      |      |       |        |
|-----------|------------------------------------------|---|-------|------|------|------|-------|--------|
| 10103-CAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 12.42 | 78.6 | 27.2 | 9.29 | 126.0 | ±3.0 % |
|           |                                          | Y | 9.78  | 74.1 | 25.0 |      | 141.1 |        |
|           |                                          | Z | 8.68  | 72.3 | 24.8 |      | 127.4 |        |
| 10108-CAC | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 6.57  | 67.9 | 20.0 | 5.80 | 144.7 | ±1.4 % |
|           |                                          | Y | 6.19  | 66.6 | 19.2 |      | 126.9 |        |
|           |                                          | Z | 6.50  | 67.4 | 20.1 |      | 128.3 |        |
| 10117-CAB | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 10.56 | 69.6 | 21.7 | 8.07 | 136.4 | ±2.5 % |
|           |                                          | Y | 10.21 | 69.0 | 21.2 |      | 142.8 |        |
|           |                                          | Z | 10.95 | 70.3 | 22.4 |      | 149.6 |        |
| 10151-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)  | X | 11.31 | 76.6 | 26.2 | 9.28 | 124.3 | ±3.0 % |
|           |                                          | Y | 9.26  | 73.5 | 24.9 |      | 136.5 |        |
|           |                                          | Z | 8.51  | 72.6 | 25.3 |      | 147.8 |        |
| 10154-CAC | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)  | X | 6.23  | 67.2 | 19.7 | 5.75 | 144.5 | ±1.4 % |
|           |                                          | Y | 6.12  | 67.0 | 19.5 |      | 146.5 |        |
|           |                                          | Z | 6.17  | 66.8 | 19.7 |      | 126.0 |        |
| 10160-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)  | X | 6.65  | 67.6 | 19.8 | 5.82 | 149.6 | ±1.4 % |
|           |                                          | Y | 6.28  | 66.5 | 19.1 |      | 128.2 |        |
|           |                                          | Z | 6.49  | 66.9 | 19.7 |      | 130.6 |        |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)    | X | 5.25  | 67.1 | 19.8 | 5.73 | 149.2 | ±2.7 % |
|           |                                          | Y | 4.91  | 66.4 | 19.3 |      | 127.6 |        |
|           |                                          | Z | 5.18  | 67.5 | 20.3 |      | 129.2 |        |
| 10172-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)    | X | 13.26 | 87.2 | 31.5 | 9.21 | 141.5 | ±3.5 % |
|           |                                          | Y | 8.12  | 76.7 | 26.7 |      | 148.3 |        |
|           |                                          | Z | 6.24  | 71.2 | 25.1 |      | 133.0 |        |
| 10175-CAC | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)    | X | 5.24  | 67.1 | 19.8 | 5.72 | 144.4 | ±1.4 % |
|           |                                          | Y | 5.07  | 67.2 | 19.7 |      | 148.4 |        |
|           |                                          | Z | 5.39  | 68.3 | 20.9 |      | 149.2 |        |
| 10181-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)    | X | 5.23  | 67.0 | 19.7 | 5.72 | 147.7 | ±1.4 % |
|           |                                          | Y | 5.08  | 67.2 | 19.7 |      | 147.7 |        |
|           |                                          | Z | 5.32  | 68.0 | 20.7 |      | 149.9 |        |
| 10196-CAB | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)  | X | 10.20 | 69.2 | 21.6 | 8.10 | 132.2 | ±2.5 % |
|           |                                          | Y | 9.77  | 68.4 | 21.0 |      | 132.4 |        |
|           |                                          | Z | 10.50 | 69.7 | 22.2 |      | 142.9 |        |
| 10225-CAB | UMTS-FDD (HSPA+)                         | X | 7.05  | 66.7 | 19.3 | 5.97 | 134.8 | ±1.7 % |
|           |                                          | Y | 6.99  | 67.1 | 19.3 |      | 137.4 |        |
|           |                                          | Z | 7.25  | 67.1 | 19.9 |      | 143.2 |        |
| 10237-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)    | X | 12.72 | 85.8 | 30.7 | 9.21 | 144.2 | ±3.0 % |
|           |                                          | Y | 7.30  | 73.7 | 25.2 |      | 124.4 |        |
|           |                                          | Z | 6.37  | 71.8 | 25.5 |      | 135.4 |        |
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)  | X | 12.64 | 81.1 | 28.7 | 9.24 | 142.0 | ±3.3 % |
|           |                                          | Y | 8.41  | 72.0 | 24.2 |      | 125.6 |        |
|           |                                          | Z | 7.90  | 71.5 | 24.9 |      | 139.7 |        |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 11.35 | 76.9 | 26.5 | 9.30 | 118.8 | ±2.7 % |
|           |                                          | Y | 9.17  | 73.2 | 24.7 |      | 135.1 |        |
|           |                                          | Z | 8.55  | 72.7 | 25.4 |      | 146.4 |        |

|           |                                                               |   |       |      |      |      |       |        |
|-----------|---------------------------------------------------------------|---|-------|------|------|------|-------|--------|
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)                      | X | 4.42  | 66.3 | 18.4 | 3.96 | 134.0 | ±1.2 % |
|           |                                                               | Y | 4.49  | 66.9 | 18.6 |      | 140.3 |        |
|           |                                                               | Z | 4.67  | 67.6 | 19.5 |      | 142.8 |        |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate                                | X | 3.71  | 66.6 | 18.4 | 3.46 | 147.8 | ±0.9 % |
|           |                                                               | Y | 3.74  | 67.2 | 18.6 |      | 130.4 |        |
|           |                                                               | Z | 3.70  | 66.6 | 18.9 |      | 131.8 |        |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate                                | X | 3.68  | 66.8 | 18.5 | 3.39 | 147.7 | ±0.7 % |
|           |                                                               | Y | 3.60  | 66.7 | 18.3 |      | 132.8 |        |
|           |                                                               | Z | 3.66  | 66.5 | 18.7 |      | 133.8 |        |
| 10297-AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)                       | X | 6.55  | 67.8 | 20.0 | 5.81 | 143.8 | ±1.7 % |
|           |                                                               | Y | 6.39  | 67.3 | 19.6 |      | 147.3 |        |
|           |                                                               | Z | 6.60  | 67.6 | 20.3 |      | 129.4 |        |
| 10311-AAA | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)                      | X | 7.16  | 68.5 | 20.4 | 6.06 | 149.6 | ±1.4 % |
|           |                                                               | Y | 6.69  | 67.0 | 19.4 |      | 129.6 |        |
|           |                                                               | Z | 7.28  | 68.5 | 20.8 |      | 136.6 |        |
| 10400-AAB | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)           | X | 10.51 | 69.6 | 22.0 | 8.37 | 132.9 | ±2.7 % |
|           |                                                               | Y | 10.08 | 68.8 | 21.3 |      | 135.5 |        |
|           |                                                               | Z | 10.91 | 70.2 | 22.7 |      | 147.0 |        |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0)                                    | X | 4.65  | 66.6 | 18.0 | 3.76 | 140.7 | ±2.2 % |
|           |                                                               | Y | 4.93  | 68.8 | 18.8 |      | 143.5 |        |
|           |                                                               | Z | 4.99  | 68.3 | 19.2 |      | 148.7 |        |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A)                                    | X | 4.53  | 66.5 | 17.8 | 3.77 | 138.3 | ±0.7 % |
|           |                                                               | Y | 4.85  | 68.9 | 18.8 |      | 140.2 |        |
|           |                                                               | Z | 4.58  | 66.5 | 18.2 |      | 145.3 |        |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)     | X | 2.43  | 66.1 | 17.4 | 1.54 | 133.0 | ±1.9 % |
|           |                                                               | Y | 2.72  | 68.0 | 18.0 |      | 138.1 |        |
|           |                                                               | Z | 2.54  | 67.6 | 18.8 |      | 139.4 |        |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 10.18 | 69.0 | 21.5 | 8.23 | 132.1 | ±2.5 % |
|           |                                                               | Y | 9.90  | 68.6 | 21.2 |      | 134.4 |        |
|           |                                                               | Z | 10.65 | 69.8 | 22.4 |      | 144.7 |        |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 7 and 8).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3258

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 6.45    | 6.45    | 6.45    | 0.48               | 1.43                    | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 6.21    | 6.21    | 6.21    | 0.40               | 1.59                    | ± 12.0 %    |
| 1750                 | 40.1                               | 1.37                            | 5.27    | 5.27    | 5.27    | 0.66               | 1.25                    | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 5.15    | 5.15    | 5.15    | 0.75               | 1.20                    | ± 12.0 %    |
| 2300                 | 39.5                               | 1.67                            | 5.06    | 5.06    | 5.06    | 0.73               | 1.31                    | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 4.61    | 4.61    | 4.61    | 0.69               | 1.36                    | ± 12.0 %    |
| 2600                 | 39.0                               | 1.96                            | 4.38    | 4.38    | 4.38    | 0.80               | 1.26                    | ± 12.0 %    |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3258

### Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 55.5                               | 0.96                            | 6.13    | 6.13    | 6.13    | 0.47               | 1.51                    | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 6.16    | 6.16    | 6.16    | 0.63               | 1.25                    | ± 12.0 %    |
| 1750                 | 53.4                               | 1.49                            | 4.88    | 4.88    | 4.88    | 0.75               | 1.39                    | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 4.64    | 4.64    | 4.64    | 0.71               | 1.34                    | ± 12.0 %    |
| 2300                 | 52.9                               | 1.81                            | 4.77    | 4.77    | 4.77    | 0.80               | 1.18                    | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 4.17    | 4.17    | 4.17    | 0.80               | 1.09                    | ± 12.0 %    |
| 2600                 | 52.5                               | 2.16                            | 3.95    | 3.95    | 3.95    | 0.80               | 1.09                    | ± 12.0 %    |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


## Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

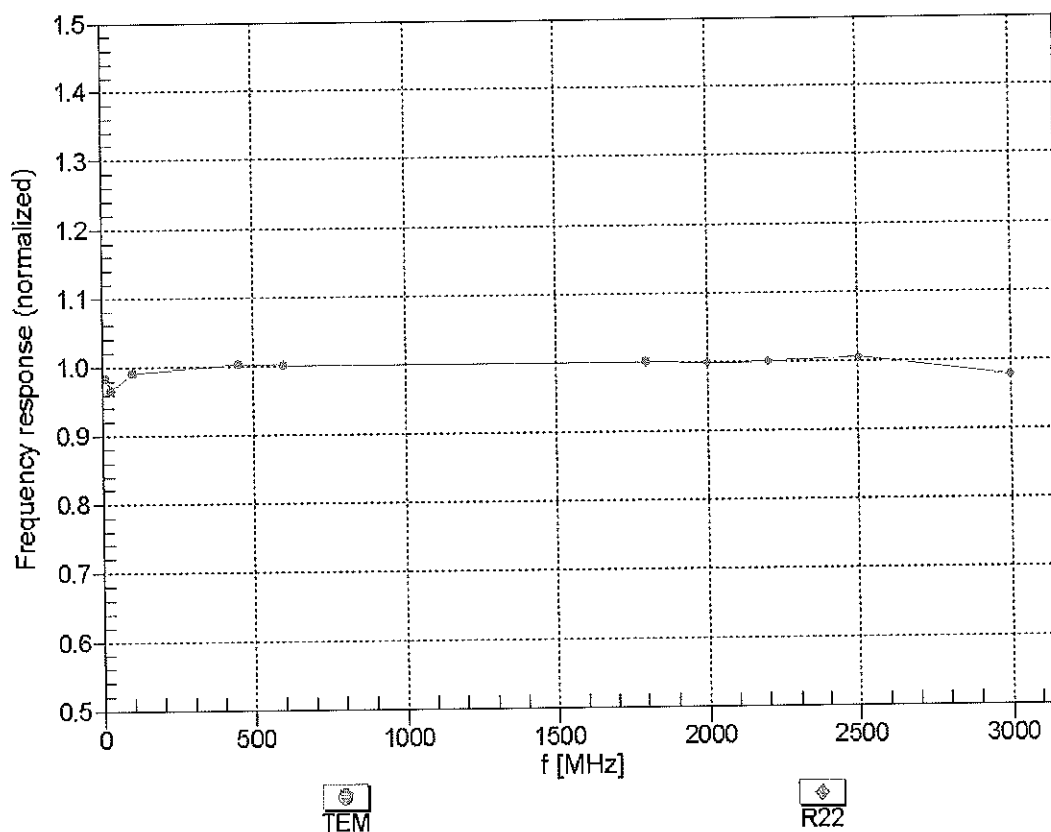



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM

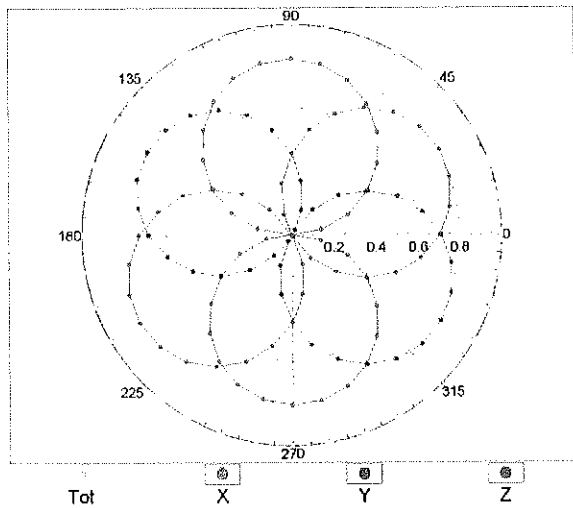


f=1800 MHz,R22

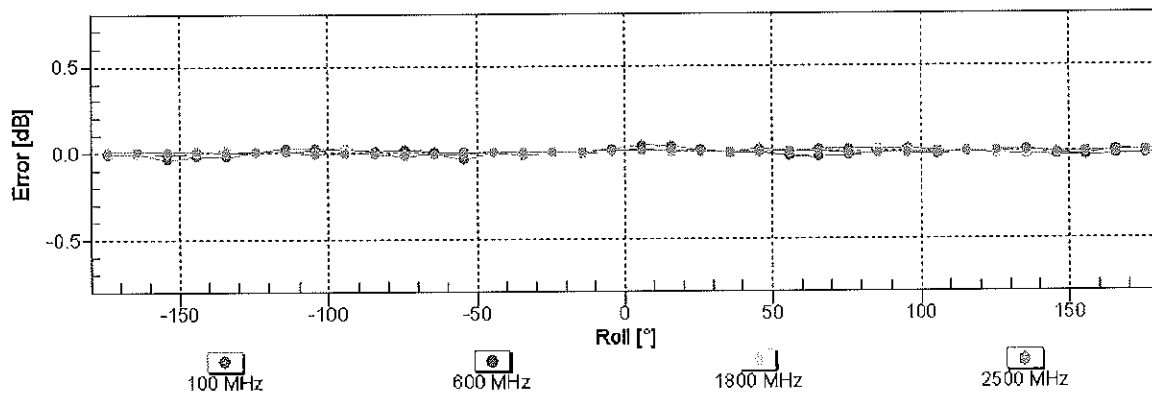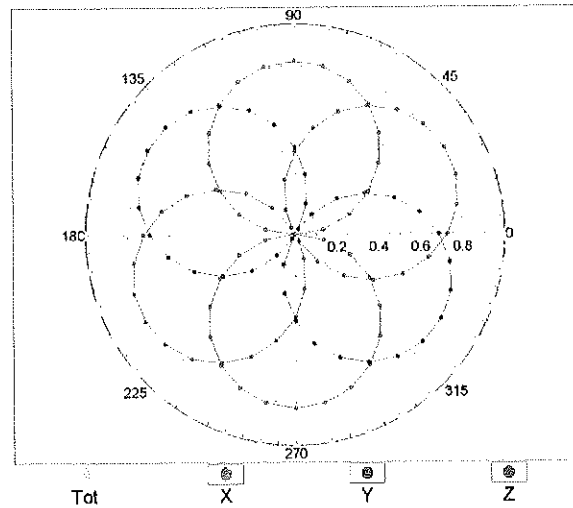


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

**Dynamic Range  $f(\text{SAR}_{\text{head}})$**   
(TEM cell ,  $f_{\text{eval}}= 1900 \text{ MHz}$ )

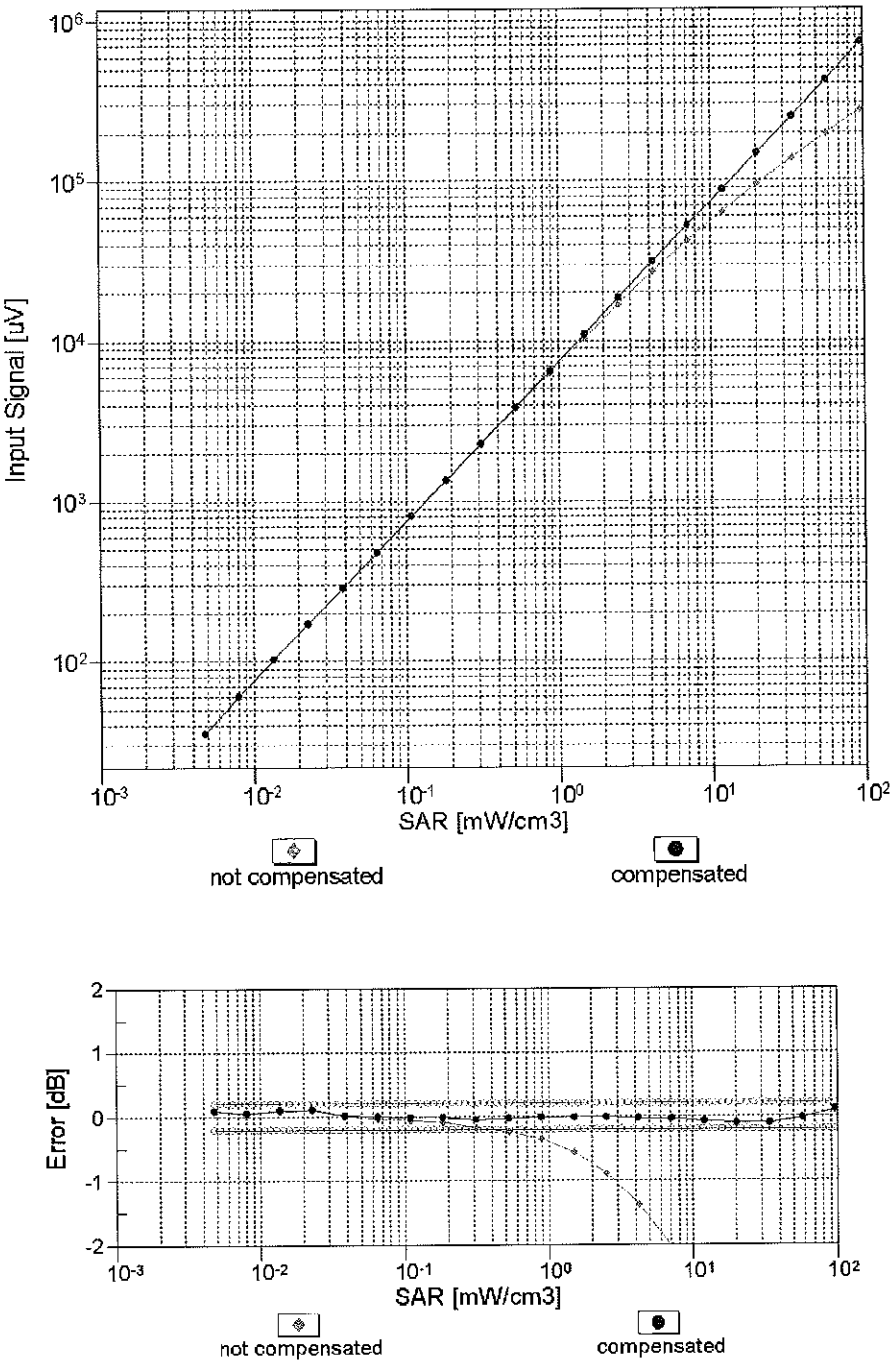



**Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )**

## Conversion Factor Assessment

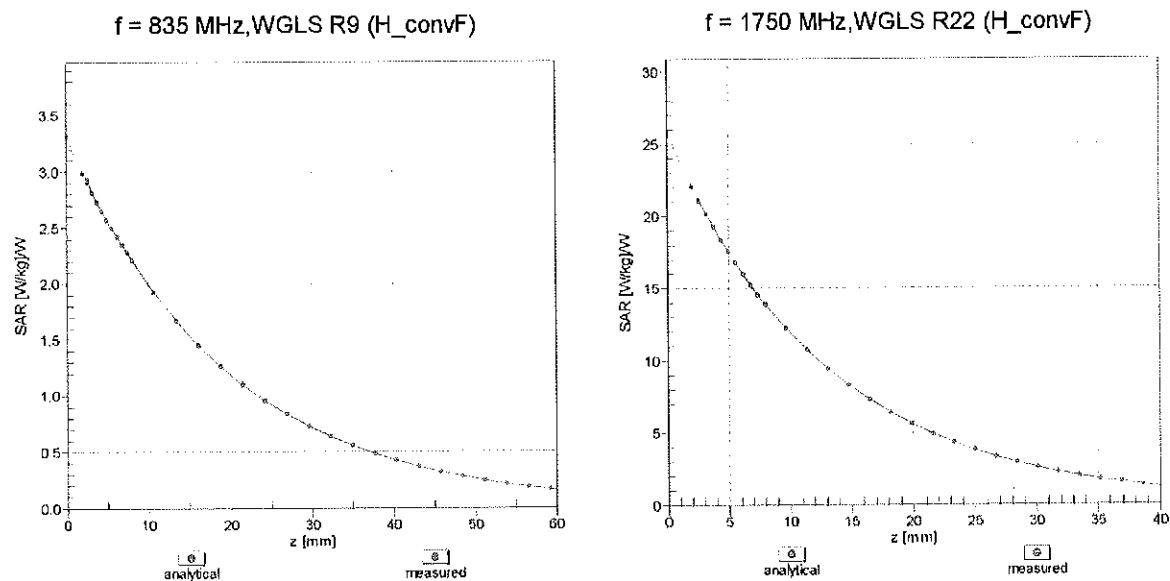

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$

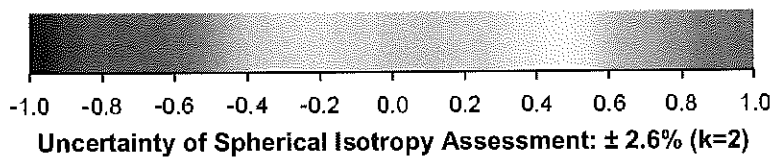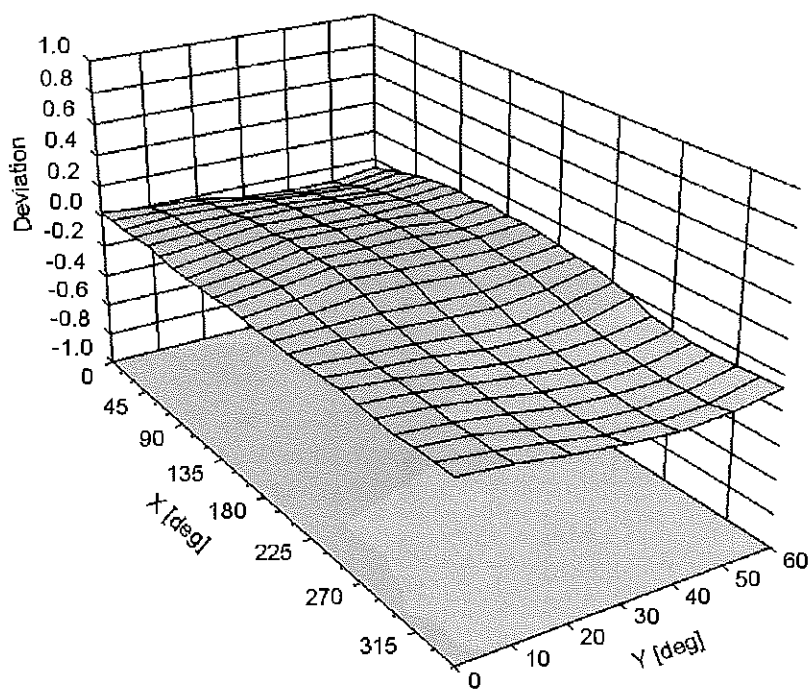

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3258

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -114.2     |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 10 mm      |
| Tip Diameter                                  | 4 mm       |
| Probe Tip to Sensor X Calibration Point       | 2 mm       |
| Probe Tip to Sensor Y Calibration Point       | 2 mm       |
| Probe Tip to Sensor Z Calibration Point       | 2 mm       |
| Recommended Measurement Distance from Surface | 3 mm       |

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **ES3-3332\_Sep14/2**

## CALIBRATION CERTIFICATE (Replacement of No: ES3-3332\_Sep14)

Object **ES3DV3 - SN:3332**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**  
Calibration procedure for dosimetric E-field probes

CC  
12/14/14

Calibration date: **September 18, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 03-Apr-14 (No. 217-01911)         | Apr-15                 |
| Power sensor E4412A        | MY41498087      | 03-Apr-14 (No. 217-01911)         | Apr-15                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 03-Apr-14 (No. 217-01915)         | Apr-15                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 03-Apr-14 (No. 217-01919)         | Apr-15                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920)         | Apr-15                 |
| Reference Probe ES3DV2     | SN: 3013        | 30-Dec-13 (No. ES3-3013_Dec13)    | Dec-14                 |
| DAE4                       | SN: 660         | 13-Dec-13 (No. DAE4-660_Dec13)    | Dec-14                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-16 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

|                                                                                                                 | Name           | Function              | Signature |
|-----------------------------------------------------------------------------------------------------------------|----------------|-----------------------|-----------|
| Calibrated by:                                                                                                  | Israe El-Naouq | Laboratory Technician |           |
| Approved by:                                                                                                    | Katja Pokovic  | Technical Manager     |           |
| Issued: November 3, 2014                                                                                        |                |                       |           |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |                |                       |           |



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                       |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>:** Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>:** DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>:** A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical Isotropy (3D deviation from Isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).



# Probe ES3DV3

## SN:3332

Manufactured: January 24, 2012  
Calibrated: September 18, 2014

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3332

### Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.94     | 1.15     | 0.98     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 105.8    | 103.8    | 112.4    |               |

### Modulation Calibration Parameters

| UID       | Communication System Name                     |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C    | D<br>dB | VR<br>mV | Unc <sup>C</sup><br>(k=2) |
|-----------|-----------------------------------------------|---|---------|------------------------------|------|---------|----------|---------------------------|
| 0         | CW                                            | X | 0.0     | 0.0                          | 1.0  | 0.00    | 178.7    | $\pm 3.0 \%$              |
|           |                                               | Y | 0.0     | 0.0                          | 1.0  |         | 199.5    |                           |
|           |                                               | Z | 0.0     | 0.0                          | 1.0  |         | 186.5    |                           |
| 10010-CAA | SAR Validation (Square, 100ms, 10ms)          | X | 55.60   | 92.4                         | 20.6 | 10.00   | 35.7     | $\pm 1.7 \%$              |
|           |                                               | Y | 2.80    | 61.2                         | 11.6 |         | 42.9     |                           |
|           |                                               | Z | 10.49   | 80.1                         | 18.0 |         | 36.1     |                           |
| 10011-CAB | UMTS-FDD (WCDMA)                              | X | 3.47    | 67.9                         | 18.8 | 2.91    | 141.3    | $\pm 0.7 \%$              |
|           |                                               | Y | 3.29    | 67.0                         | 18.4 |         | 138.2    |                           |
|           |                                               | Z | 3.78    | 70.4                         | 20.1 |         | 147.9    |                           |
| 10012-CAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)      | X | 3.53    | 72.0                         | 20.1 | 1.87    | 141.7    | $\pm 0.7 \%$              |
|           |                                               | Y | 3.03    | 69.1                         | 18.8 |         | 141.1    |                           |
|           |                                               | Z | 4.06    | 75.5                         | 21.6 |         | 148.2    |                           |
| 10013-CAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 10.87   | 69.8                         | 22.6 | 9.46    | 137.3    | $\pm 3.5 \%$              |
|           |                                               | Y | 11.63   | 71.7                         | 23.9 |         | 141.9    |                           |
|           |                                               | Z | 10.51   | 69.6                         | 22.5 |         | 139.2    |                           |
| 10021-DAB | GSM-FDD (TDMA, GMSK)                          | X | 6.92    | 78.4                         | 20.1 | 9.39    | 137.0    | $\pm 2.5 \%$              |
|           |                                               | Y | 26.20   | 99.6                         | 27.8 |         | 141.5    |                           |
|           |                                               | Z | 5.13    | 78.3                         | 21.1 |         | 144.7    |                           |
| 10023-DAB | GPRS-FDD (TDMA, GMSK, TN 0)                   | X | 9.10    | 83.6                         | 22.5 | 9.57    | 144.0    | $\pm 2.5 \%$              |
|           |                                               | Y | 26.31   | 100.0                        | 28.1 |         | 136.7    |                           |
|           |                                               | Z | 6.15    | 81.6                         | 22.5 |         | 139.9    |                           |
| 10024-DAB | GPRS-FDD (TDMA, GMSK, TN 0-1)                 | X | 10.54   | 84.1                         | 20.4 | 6.56    | 141.8    | $\pm 2.5 \%$              |
|           |                                               | Y | 40.55   | 99.6                         | 24.9 |         | 142.2    |                           |
|           |                                               | Z | 6.45    | 81.5                         | 20.2 |         | 145.7    |                           |
| 10027-DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2)               | X | 28.34   | 94.6                         | 21.9 | 4.80    | 131.4    | $\pm 2.5 \%$              |
|           |                                               | Y | 52.22   | 99.6                         | 23.3 |         | 126.8    |                           |
|           |                                               | Z | 28.33   | 99.5                         | 23.9 |         | 140.7    |                           |
| 10028-DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)             | X | 52.17   | 100.0                        | 22.2 | 3.55    | 147.0    | $\pm 1.7 \%$              |
|           |                                               | Y | 57.29   | 99.6                         | 22.4 |         | 133.0    |                           |
|           |                                               | Z | 25.84   | 99.5                         | 23.3 |         | 126.2    |                           |
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)           | X | 59.05   | 100.0                        | 19.9 | 1.16    | 135.5    | $\pm 1.9 \%$              |
|           |                                               | Y | 100.00  | 99.7                         | 19.2 |         | 143.5    |                           |
|           |                                               | Z | 34.97   | 100.0                        | 20.4 |         | 143.1    |                           |

|           |                                               |   |       |      |      |      |       |        |
|-----------|-----------------------------------------------|---|-------|------|------|------|-------|--------|
| 10039-CAB | CDMA2000 (1xRTT, RC1)                         | X | 4.78  | 66.9 | 18.9 | 4.57 | 134.6 | ±0.9 % |
|           |                                               | Y | 4.85  | 67.1 | 19.1 |      | 141.0 |        |
|           |                                               | Z | 4.76  | 67.8 | 19.4 |      | 140.7 |        |
| 10081-CAB | CDMA2000 (1xRTT, RC3)                         | X | 3.98  | 66.4 | 18.6 | 3.97 | 130.4 | ±0.7 % |
|           |                                               | Y | 3.98  | 66.5 | 18.7 |      | 136.2 |        |
|           |                                               | Z | 4.04  | 67.7 | 19.2 |      | 137.4 |        |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2)                   | X | 4.75  | 67.3 | 18.8 | 3.98 | 144.4 | ±0.7 % |
|           |                                               | Y | 4.55  | 66.5 | 18.5 |      | 126.5 |        |
|           |                                               | Z | 4.72  | 67.9 | 19.0 |      | 128.1 |        |
| 10100-CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)      | X | 6.26  | 66.9 | 19.2 | 5.67 | 124.5 | ±1.2 % |
|           |                                               | Y | 6.38  | 67.4 | 19.7 |      | 131.7 |        |
|           |                                               | Z | 6.36  | 67.7 | 19.7 |      | 132.3 |        |
| 10108-CAB | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)      | X | 6.44  | 67.5 | 19.7 | 5.80 | 147.4 | ±1.4 % |
|           |                                               | Y | 6.31  | 67.2 | 19.7 |      | 130.2 |        |
|           |                                               | Z | 6.17  | 67.2 | 19.6 |      | 130.1 |        |
| 10110-CAB | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)       | X | 6.08  | 66.9 | 19.5 | 5.75 | 142.7 | ±1.4 % |
|           |                                               | Y | 5.97  | 66.6 | 19.4 |      | 127.3 |        |
|           |                                               | Z | 5.84  | 66.7 | 19.3 |      | 126.2 |        |
| 10114-CAA | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | X | 10.13 | 68.7 | 21.0 | 8.10 | 136.9 | ±2.5 % |
|           |                                               | Y | 10.57 | 69.9 | 21.9 |      | 146.3 |        |
|           |                                               | Z | 10.06 | 69.0 | 21.1 |      | 143.6 |        |
| 10117-CAA | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)      | X | 10.12 | 68.6 | 21.0 | 8.07 | 138.2 | ±2.5 % |
|           |                                               | Y | 10.60 | 69.9 | 21.9 |      | 148.0 |        |
|           |                                               | Z | 10.07 | 69.0 | 21.1 |      | 146.6 |        |
| 10151-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)       | X | 8.76  | 71.7 | 23.8 | 9.28 | 130.7 | ±3.0 % |
|           |                                               | Y | 10.03 | 75.2 | 25.9 |      | 121.5 |        |
|           |                                               | Z | 8.15  | 70.7 | 23.5 |      | 134.1 |        |
| 10164-CAB | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)       | X | 6.10  | 67.0 | 19.5 | 5.75 | 144.4 | ±1.4 % |
|           |                                               | Y | 5.98  | 66.6 | 19.4 |      | 127.8 |        |
|           |                                               | Z | 5.84  | 66.6 | 19.3 |      | 127.2 |        |
| 10160-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)       | X | 6.56  | 67.5 | 19.7 | 5.82 | 149.5 | ±1.7 % |
|           |                                               | Y | 6.41  | 67.1 | 19.6 |      | 132.5 |        |
|           |                                               | Z | 6.17  | 66.8 | 19.4 |      | 130.4 |        |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)         | X | 5.01  | 67.0 | 19.7 | 5.73 | 147.8 | ±1.2 % |
|           |                                               | Y | 5.01  | 66.9 | 19.8 |      | 132.1 |        |
|           |                                               | Z | 4.75  | 66.9 | 19.7 |      | 130.3 |        |
| 10172-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)         | X | 7.65  | 75.0 | 25.8 | 9.21 | 144.9 | ±2.7 % |
|           |                                               | Y | 10.17 | 82.4 | 29.7 |      | 136.4 |        |
|           |                                               | Z | 6.53  | 72.3 | 24.6 |      | 145.6 |        |
| 10175-CAB | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)         | X | 4.98  | 66.9 | 19.6 | 5.72 | 141.0 | ±1.2 % |
|           |                                               | Y | 4.98  | 66.7 | 19.7 |      | 130.5 |        |
|           |                                               | Z | 4.71  | 66.7 | 19.5 |      | 128.1 |        |

|           |                                              |   |       |      |      |      |       |        |
|-----------|----------------------------------------------|---|-------|------|------|------|-------|--------|
| 10181-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)        | X | 4.95  | 66.7 | 19.5 | 5.72 | 139.8 | ±1.2 % |
|           |                                              | Y | 4.97  | 66.7 | 19.7 |      | 129.5 |        |
|           |                                              | Z | 4.72  | 66.8 | 19.6 |      | 128.0 |        |
| 10193-CAA | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK) | X | 9.75  | 68.2 | 20.9 | 8.09 | 131.8 | ±2.5 % |
|           |                                              | Y | 10.16 | 69.4 | 21.7 |      | 139.2 |        |
|           |                                              | Z | 9.62  | 68.6 | 21.0 |      | 137.3 |        |
| 10196-CAA | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)      | X | 9.77  | 68.3 | 20.9 | 8.10 | 133.6 | ±2.5 % |
|           |                                              | Y | 10.17 | 69.4 | 21.8 |      | 140.1 |        |
|           |                                              | Z | 9.61  | 68.5 | 21.0 |      | 140.1 |        |
| 10219-CAA | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)      | X | 9.69  | 68.3 | 20.9 | 8.03 | 133.6 | ±2.5 % |
|           |                                              | Y | 10.05 | 69.3 | 21.7 |      | 139.2 |        |
|           |                                              | Z | 9.58  | 68.7 | 21.1 |      | 139.4 |        |
| 10222-CAA | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)       | X | 10.13 | 68.7 | 21.0 | 8.06 | 140.7 | ±2.5 % |
|           |                                              | Y | 10.61 | 69.8 | 21.8 |      | 145.1 |        |
|           |                                              | Z | 10.11 | 69.1 | 21.2 |      | 148.4 |        |
| 10225-CAB | UMTS-FDD (HSPA+)                             | X | 7.03  | 67.2 | 19.4 | 5.97 | 138.0 | ±1.4 % |
|           |                                              | Y | 7.07  | 67.2 | 19.6 |      | 140.2 |        |
|           |                                              | Z | 6.97  | 67.8 | 19.7 |      | 144.6 |        |
| 10237-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)        | X | 7.11  | 72.9 | 24.7 | 9.21 | 124.6 | ±2.7 % |
|           |                                              | Y | 10.04 | 82.0 | 29.5 |      | 135.7 |        |
|           |                                              | Z | 6.29  | 71.2 | 24.0 |      | 126.2 |        |
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)      | X | 8.61  | 72.5 | 24.3 | 9.24 | 145.2 | ±3.3 % |
|           |                                              | Y | 10.53 | 77.8 | 27.4 |      | 136.7 |        |
|           |                                              | Z | 7.56  | 70.0 | 23.1 |      | 126.7 |        |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)     | X | 8.74  | 71.6 | 23.8 | 9.30 | 128.7 | ±3.3 % |
|           |                                              | Y | 11.51 | 79.1 | 28.0 |      | 147.2 |        |
|           |                                              | Z | 8.07  | 70.4 | 23.2 |      | 134.1 |        |
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)    | X | 5.90  | 66.7 | 18.7 | 4.87 | 128.0 | ±0.9 % |
|           |                                              | Y | 5.93  | 66.8 | 18.9 |      | 134.5 |        |
|           |                                              | Z | 5.92  | 67.6 | 19.1 |      | 138.2 |        |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)     | X | 4.53  | 67.1 | 18.8 | 3.96 | 133.8 | ±0.7 % |
|           |                                              | Y | 4.48  | 67.0 | 18.8 |      | 139.6 |        |
|           |                                              | Z | 4.62  | 68.3 | 19.3 |      | 145.0 |        |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate               | X | 3.82  | 67.8 | 19.0 | 3.46 | 147.6 | ±0.7 % |
|           |                                              | Y | 3.66  | 67.0 | 18.8 |      | 131.7 |        |
|           |                                              | Z | 3.97  | 69.6 | 20.0 |      | 135.9 |        |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate               | X | 3.70  | 67.5 | 18.8 | 3.39 | 128.1 | ±0.7 % |
|           |                                              | Y | 3.60  | 66.9 | 18.7 |      | 132.5 |        |
|           |                                              | Z | 3.80  | 68.9 | 19.5 |      | 139.8 |        |
| 10297-AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)      | X | 6.47  | 67.6 | 19.8 | 5.81 | 149.7 | ±1.7 % |
|           |                                              | Y | 6.24  | 66.9 | 19.5 |      | 126.3 |        |
|           |                                              | Z | 6.20  | 67.3 | 19.6 |      | 130.9 |        |

|           |                                                               |   |       |      |      |      |       |        |
|-----------|---------------------------------------------------------------|---|-------|------|------|------|-------|--------|
| 10311-AAA | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)                      | X | 6.72  | 67.1 | 19.5 | 6.06 | 128.8 | ±1.4 % |
|           |                                                               | Y | 6.85  | 67.7 | 20.0 |      | 132.4 |        |
|           |                                                               | Z | 6.75  | 67.7 | 19.8 |      | 136.6 |        |
| 10315-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)     | X | 3.27  | 71.1 | 19.8 | 1.71 | 140.1 | ±0.7 % |
|           |                                                               | Y | 2.95  | 69.4 | 19.1 |      | 139.8 |        |
|           |                                                               | Z | 3.75  | 74.4 | 21.2 |      | 146.9 |        |
| 10316-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle) | X | 10.04 | 68.7 | 21.3 | 8.36 | 136.3 | ±2.5 % |
|           |                                                               | Y | 10.42 | 69.8 | 22.1 |      | 138.1 |        |
|           |                                                               | Z | 9.84  | 68.9 | 21.3 |      | 139.7 |        |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0)                                    | X | 5.01  | 69.3 | 19.2 | 3.76 | 144.3 | ±0.7 % |
|           |                                                               | Y | 4.79  | 68.1 | 18.7 |      | 146.3 |        |
|           |                                                               | Z | 5.40  | 72.5 | 20.8 |      | 146.7 |        |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A)                                    | X | 4.97  | 69.5 | 19.3 | 3.77 | 141.3 | ±0.7 % |
|           |                                                               | Y | 4.72  | 68.2 | 18.8 |      | 143.1 |        |
|           |                                                               | Z | 5.12  | 71.8 | 20.5 |      | 144.4 |        |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)     | X | 3.05  | 70.5 | 19.5 | 1.54 | 139.7 | ±0.7 % |
|           |                                                               | Y | 2.71  | 68.7 | 18.9 |      | 140.2 |        |
|           |                                                               | Z | 4.22  | 77.3 | 22.5 |      | 145.9 |        |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 9.92  | 68.6 | 21.1 | 8.23 | 136.3 | ±2.5 % |
|           |                                                               | Y | 10.20 | 69.4 | 21.8 |      | 138.3 |        |
|           |                                                               | Z | 9.76  | 68.8 | 21.3 |      | 138.9 |        |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 8 and 9).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3332

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 6.56    | 6.56    | 6.56    | 0.50               | 1.43                    | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 6.31    | 6.31    | 6.31    | 0.61               | 1.31                    | ± 12.0 %    |
| 1750                 | 40.1                               | 1.37                            | 5.17    | 5.17    | 5.17    | 0.62               | 1.33                    | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 5.04    | 5.04    | 5.04    | 0.80               | 1.17                    | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 4.49    | 4.49    | 4.49    | 0.77               | 1.24                    | ± 12.0 %    |
| 2600                 | 39.0                               | 1.96                            | 4.35    | 4.35    | 4.35    | 0.73               | 1.38                    | ± 12.0 %    |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3332

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 55.5                               | 0.96                            | 6.24    | 6.24    | 6.24    | 0.50               | 1.50                    | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 6.21    | 6.21    | 6.21    | 0.45               | 1.59                    | ± 12.0 %    |
| 1750                 | 53.4                               | 1.49                            | 4.88    | 4.88    | 4.88    | 0.39               | 1.78                    | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 4.64    | 4.64    | 4.64    | 0.61               | 1.47                    | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 4.31    | 4.31    | 4.31    | 0.80               | 1.18                    | ± 12.0 %    |
| 2600                 | 52.5                               | 2.16                            | 4.11    | 4.11    | 4.11    | 0.68               | 0.99                    | ± 12.0 %    |


<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

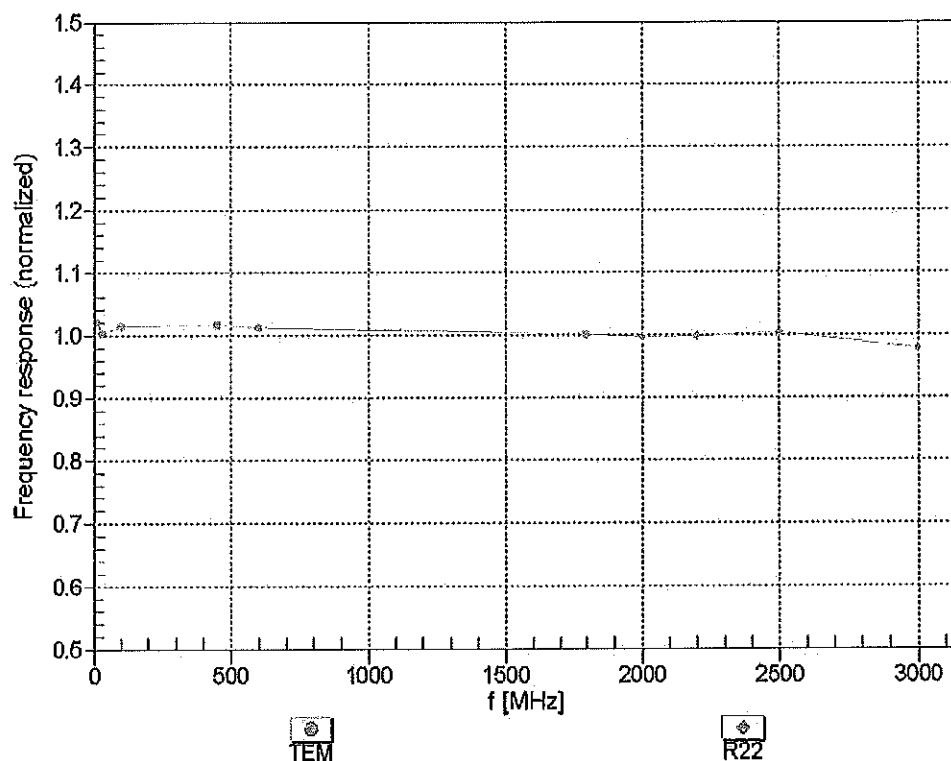



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )



Receiving Pattern ( $\phi$ ),  $\theta = 0^\circ$


f=600 MHz,TEM

f=1800 MHz,R22

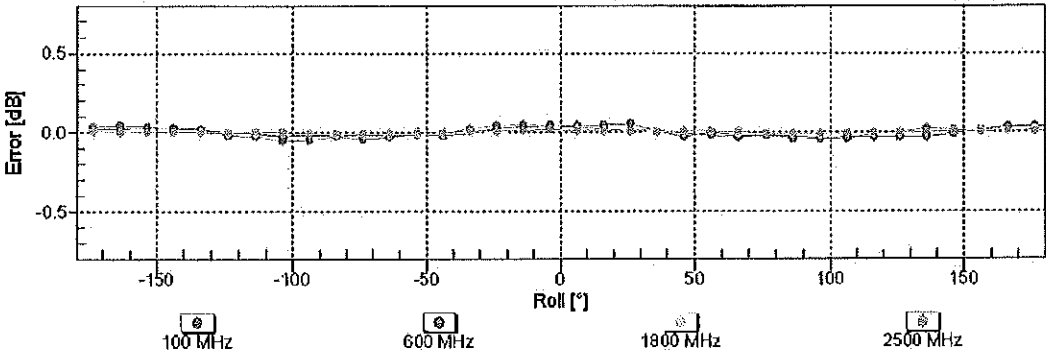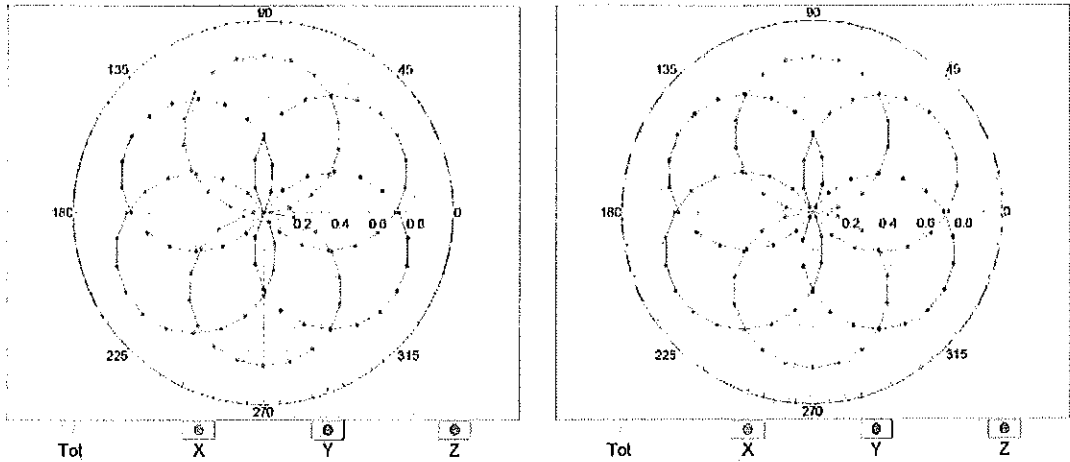


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

# Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$ )

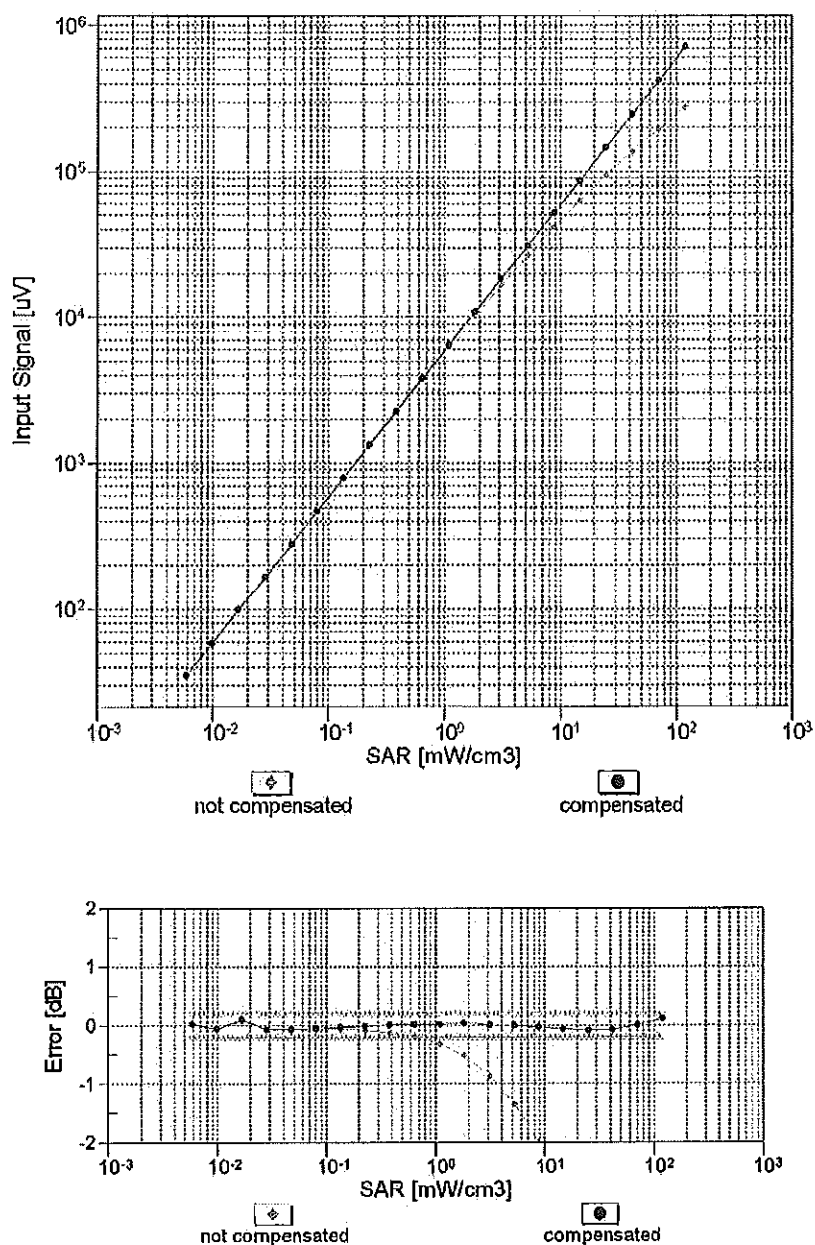



Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

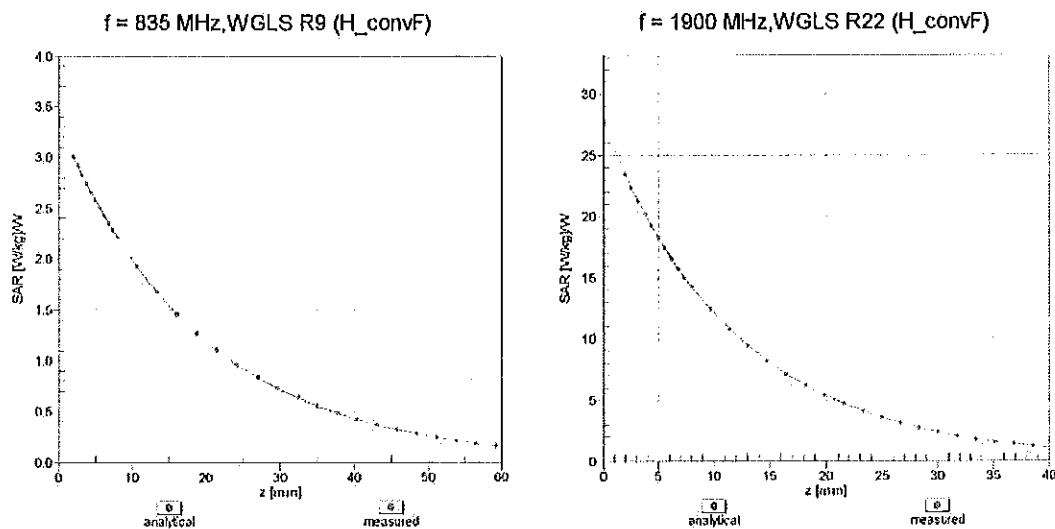

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$

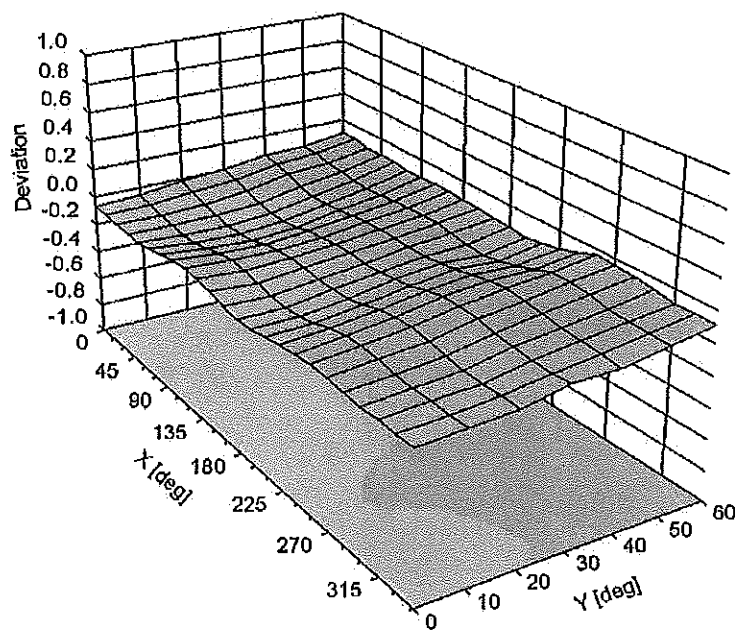

**DASY/EASY - Parameters of Probe: ES3DV3 - SN:3332****Other Probe Parameters**

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -3.7       |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 10 mm      |
| Tip Diameter                                  | 4 mm       |
| Probe Tip to Sensor X Calibration Point       | 2 mm       |
| Probe Tip to Sensor Y Calibration Point       | 2 mm       |
| Probe Tip to Sensor Z Calibration Point       | 2 mm       |
| Recommended Measurement Distance from Surface | 3 mm       |



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **EX3-3914\_Feb15**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3914**

CCV  
 3/6/15

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6**  
**Calibration procedure for dosimetric E-field probes**

Calibration date: **February 10, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 03-Apr-14 (No. 217-01911)         | Apr-15                 |
| Power sensor E4412A        | MY41498087      | 03-Apr-14 (No. 217-01911)         | Apr-15                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 03-Apr-14 (No. 217-01915)         | Apr-15                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 03-Apr-14 (No. 217-01919)         | Apr-15                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920)         | Apr-15                 |
| Reference Probe ES3DV2     | SN: 3013        | 30-Dec-14 (No. ES3-3013_Dec14)    | Dec-15                 |
| DAE4                       | SN: 660         | 14-Jan-15 (No. DAE4-660_Jan15)    | Jan-16                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-16 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

|                |                                |                                          |               |
|----------------|--------------------------------|------------------------------------------|---------------|
| Calibrated by: | Name<br><b>Claudio Leubler</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:   | <b>Katja Pokovic</b>           | <b>Technical Manager</b>                 |               |

Issued: February 10, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\varphi$   | $\varphi$ rotation around probe axis                                                                                                                    |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the  $E^2$ -field uncertainty inside TSL (see below *ConvF*).
- NORM( $f$ )<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* *frequency\_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe EX3DV4

## SN:3914

|               |                   |
|---------------|-------------------|
| Manufactured: | December 18, 2012 |
| Repaired:     | January 23, 2015  |
| Calibrated:   | February 10, 2015 |

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3914

### Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.48     | 0.42     | 0.45     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 102.7    | 103.2    | 101.3    |               |

### Modulation Calibration Parameters

| UID           | Communication System Name                     |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C    | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|---------------|-----------------------------------------------|---|---------|------------------------------|------|---------|----------|---------------------------|
| 0             | CW                                            | X | 0.0     | 0.0                          | 1.0  | 0.00    | 137.3    | $\pm 2.7 \%$              |
|               |                                               | Y | 0.0     | 0.0                          | 1.0  |         | 140.8    |                           |
|               |                                               | Z | 0.0     | 0.0                          | 1.0  |         | 134.6    |                           |
| 10010-<br>CAA | SAR Validation (Square, 100ms, 10ms)          | X | 1.33    | 60.3                         | 9.9  | 10.00   | 40.4     | $\pm 1.2 \%$              |
|               |                                               | Y | 1.02    | 57.7                         | 9.2  |         | 42.2     |                           |
|               |                                               | Z | 1.41    | 61.3                         | 11.0 |         | 39.9     |                           |
| 10011-<br>CAB | UMTS-FDD (WCDMA)                              | X | 3.39    | 67.3                         | 18.6 | 2.91    | 148.9    | $\pm 0.5 \%$              |
|               |                                               | Y | 3.47    | 67.6                         | 18.6 |         | 130.1    |                           |
|               |                                               | Z | 3.30    | 66.5                         | 17.9 |         | 145.8    |                           |
| 10012-<br>CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)      | X | 2.92    | 68.9                         | 18.9 | 1.87    | 149.0    | $\pm 0.7 \%$              |
|               |                                               | Y | 3.17    | 70.1                         | 19.2 |         | 131.4    |                           |
|               |                                               | Z | 2.72    | 67.0                         | 17.6 |         | 146.9    |                           |
| 10013-<br>CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 10.52   | 69.1                         | 22.1 | 9.46    | 140.7    | $\pm 3.3 \%$              |
|               |                                               | Y | 10.67   | 69.8                         | 22.6 |         | 146.8    |                           |
|               |                                               | Z | 10.44   | 68.9                         | 22.0 |         | 136.8    |                           |
| 10021-<br>DAB | GSM-FDD (TDMA, GMSK)                          | X | 1.64    | 63.4                         | 11.8 | 9.39    | 86.2     | $\pm 1.7 \%$              |
|               |                                               | Y | 2.03    | 65.7                         | 13.6 |         | 105.2    |                           |
|               |                                               | Z | 1.78    | 63.6                         | 12.4 |         | 85.9     |                           |
| 10023-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0)                   | X | 1.78    | 65.0                         | 13.2 | 9.57    | 84.0     | $\pm 2.2 \%$              |
|               |                                               | Y | 1.84    | 63.8                         | 12.5 |         | 101.1    |                           |
|               |                                               | Z | 1.92    | 64.9                         | 13.4 |         | 83.0     |                           |
| 10024-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0-1)                 | X | 2.04    | 68.8                         | 13.2 | 6.56    | 141.3    | $\pm 1.9 \%$              |
|               |                                               | Y | 2.32    | 70.4                         | 14.4 |         | 134.7    |                           |
|               |                                               | Z | 1.59    | 65.5                         | 12.3 |         | 139.3    |                           |
| 10027-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2)               | X | 1.51    | 67.3                         | 11.9 | 4.80    | 148.8    | $\pm 1.9 \%$              |
|               |                                               | Y | 1.27    | 63.7                         | 10.0 |         | 136.2    |                           |
|               |                                               | Z | 3.26    | 75.5                         | 15.4 |         | 148.7    |                           |
| 10028-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)             | X | 52.54   | 99.9                         | 20.2 | 3.55    | 143.3    | $\pm 1.7 \%$              |
|               |                                               | Y | 2.95    | 74.0                         | 13.7 |         | 149.7    |                           |
|               |                                               | Z | 32.98   | 99.9                         | 21.5 |         | 141.9    |                           |
| 10032-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)           | X | 96.97   | 99.5                         | 17.5 | 1.16    | 145.3    | $\pm 1.2 \%$              |
|               |                                               | Y | 83.69   | 99.7                         | 18.1 |         | 128.6    |                           |
|               |                                               | Z | 0.69    | 65.4                         | 9.0  |         | 143.2    |                           |



|           |                                          |   |       |      |      |      |       |        |
|-----------|------------------------------------------|---|-------|------|------|------|-------|--------|
| 10062-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps) | X | 10.27 | 68.9 | 21.5 | 8.68 | 145.1 | ±2.7 % |
|           |                                          | Y | 9.95  | 68.4 | 21.3 |      | 123.8 |        |
|           |                                          | Z | 10.18 | 68.8 | 21.4 |      | 140.9 |        |
| 10100-CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 6.38  | 67.0 | 19.3 | 5.67 | 140.1 | ±1.4 % |
|           |                                          | Y | 6.54  | 67.7 | 19.6 |      | 147.0 |        |
|           |                                          | Z | 6.34  | 66.8 | 19.1 |      | 137.4 |        |
| 10103-CAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 7.44  | 67.6 | 21.6 | 9.29 | 132.4 | ±1.7 % |
|           |                                          | Y | 7.78  | 69.0 | 22.4 |      | 140.2 |        |
|           |                                          | Z | 7.40  | 67.4 | 21.4 |      | 129.5 |        |
| 10108-CAC | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 6.25  | 66.7 | 19.2 | 5.80 | 137.9 | ±1.4 % |
|           |                                          | Y | 6.36  | 67.2 | 19.5 |      | 143.3 |        |
|           |                                          | Z | 6.20  | 66.4 | 19.0 |      | 135.0 |        |
| 10117-CAB | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 10.03 | 68.2 | 20.7 | 8.07 | 128.5 | ±2.5 % |
|           |                                          | Y | 10.17 | 68.7 | 21.0 |      | 134.9 |        |
|           |                                          | Z | 9.94  | 68.0 | 20.5 |      | 125.2 |        |
| 10151-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)  | X | 7.21  | 67.6 | 21.8 | 9.28 | 149.5 | ±1.9 % |
|           |                                          | Y | 7.39  | 68.5 | 22.3 |      | 135.1 |        |
|           |                                          | Z | 7.19  | 67.5 | 21.7 |      | 147.3 |        |
| 10154-CAC | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)  | X | 5.91  | 66.2 | 19.1 | 5.75 | 133.8 | ±1.2 % |
|           |                                          | Y | 6.04  | 66.8 | 19.4 |      | 139.4 |        |
|           |                                          | Z | 5.88  | 66.0 | 18.9 |      | 131.1 |        |
| 10160-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)  | X | 6.36  | 66.7 | 19.3 | 5.82 | 139.0 | ±1.4 % |
|           |                                          | Y | 6.51  | 67.4 | 19.7 |      | 145.5 |        |
|           |                                          | Z | 6.31  | 66.4 | 19.0 |      | 136.5 |        |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)    | X | 4.79  | 66.3 | 19.4 | 5.73 | 136.1 | ±1.2 % |
|           |                                          | Y | 4.90  | 67.0 | 19.8 |      | 141.5 |        |
|           |                                          | Z | 4.76  | 66.0 | 19.1 |      | 133.8 |        |
| 10172-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)    | X | 5.66  | 68.8 | 22.7 | 9.21 | 138.2 | ±2.5 % |
|           |                                          | Y | 5.93  | 70.3 | 23.7 |      | 147.0 |        |
|           |                                          | Z | 5.68  | 68.6 | 22.6 |      | 136.7 |        |
| 10175-CAC | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)    | X | 4.77  | 66.2 | 19.3 | 5.72 | 135.7 | ±1.2 % |
|           |                                          | Y | 4.92  | 67.1 | 19.8 |      | 141.2 |        |
|           |                                          | Z | 4.72  | 65.8 | 19.0 |      | 133.6 |        |
| 10181-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)    | X | 4.77  | 66.2 | 19.3 | 5.72 | 134.8 | ±1.2 % |
|           |                                          | Y | 4.91  | 67.0 | 19.7 |      | 141.1 |        |
|           |                                          | Z | 4.76  | 66.0 | 19.1 |      | 132.8 |        |
| 10196-CAB | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)  | X | 9.99  | 68.8 | 21.1 | 8.10 | 146.9 | ±2.5 % |
|           |                                          | Y | 9.71  | 68.4 | 21.0 |      | 127.0 |        |
|           |                                          | Z | 9.91  | 68.7 | 21.0 |      | 143.4 |        |
| 10225-CAB | UMTS-FDD (HSPA+)                         | X | 7.10  | 67.5 | 19.5 | 5.97 | 149.1 | ±1.2 % |
|           |                                          | Y | 6.98  | 67.4 | 19.5 |      | 128.9 |        |
|           |                                          | Z | 7.01  | 67.2 | 19.3 |      | 145.5 |        |

|           |                                                         |   |       |      |      |      |       |        |
|-----------|---------------------------------------------------------|---|-------|------|------|------|-------|--------|
| 10237-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)                   | X | 5.68  | 68.9 | 22.8 | 9.21 | 139.9 | ±2.2 % |
|           |                                                         | Y | 5.93  | 70.3 | 23.6 |      | 148.1 |        |
|           |                                                         | Z | 5.70  | 68.8 | 22.7 |      | 137.5 |        |
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)                 | X | 6.81  | 67.4 | 21.7 | 9.24 | 143.4 | ±2.2 % |
|           |                                                         | Y | 6.93  | 68.0 | 22.2 |      | 129.3 |        |
|           |                                                         | Z | 6.79  | 67.2 | 21.6 |      | 140.3 |        |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)                | X | 7.23  | 67.7 | 21.9 | 9.30 | 149.4 | ±1.9 % |
|           |                                                         | Y | 7.42  | 68.6 | 22.4 |      | 135.2 |        |
|           |                                                         | Z | 7.19  | 67.4 | 21.6 |      | 146.2 |        |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)                | X | 4.44  | 66.7 | 18.6 | 3.96 | 129.1 | ±0.7 % |
|           |                                                         | Y | 4.57  | 67.4 | 18.9 |      | 134.5 |        |
|           |                                                         | Z | 4.35  | 66.1 | 18.1 |      | 126.6 |        |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate                          | X | 3.64  | 66.9 | 18.6 | 3.46 | 140.9 | ±0.7 % |
|           |                                                         | Y | 3.87  | 68.3 | 19.3 |      | 147.1 |        |
|           |                                                         | Z | 3.61  | 66.5 | 18.2 |      | 138.4 |        |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate                          | X | 3.64  | 67.4 | 18.8 | 3.39 | 142.3 | ±0.5 % |
|           |                                                         | Y | 3.85  | 68.5 | 19.3 |      | 148.3 |        |
|           |                                                         | Z | 3.59  | 66.7 | 18.3 |      | 139.6 |        |
| 10297-AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)                 | X | 6.23  | 66.6 | 19.2 | 5.81 | 136.3 | ±1.4 % |
|           |                                                         | Y | 6.42  | 67.4 | 19.7 |      | 142.8 |        |
|           |                                                         | Z | 6.19  | 66.3 | 19.0 |      | 133.9 |        |
| 10311-AAA | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)                | X | 6.84  | 67.3 | 19.6 | 6.06 | 142.4 | ±1.4 % |
|           |                                                         | Y | 6.98  | 67.8 | 19.9 |      | 149.5 |        |
|           |                                                         | Z | 6.75  | 66.8 | 19.3 |      | 140.0 |        |
| 10317-AAB | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle) | X | 10.13 | 68.9 | 21.3 | 8.36 | 147.4 | ±2.7 % |
|           |                                                         | Y | 9.84  | 68.4 | 21.1 |      | 127.5 |        |
|           |                                                         | Z | 10.04 | 68.7 | 21.2 |      | 143.2 |        |
| 10400-AAB | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)     | X | 10.24 | 69.0 | 21.4 | 8.37 | 148.6 | ±2.7 % |
|           |                                                         | Y | 9.92  | 68.4 | 21.2 |      | 126.6 |        |
|           |                                                         | Z | 10.14 | 68.8 | 21.3 |      | 144.6 |        |
| 10401-AAB | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)     | X | 10.60 | 68.6 | 21.2 | 8.60 | 129.4 | ±3.0 % |
|           |                                                         | Y | 10.77 | 69.1 | 21.5 |      | 136.8 |        |
|           |                                                         | Z | 10.52 | 68.4 | 21.1 |      | 125.9 |        |
| 10402-AAB | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)     | X | 10.60 | 68.5 | 20.9 | 8.53 | 129.7 | ±3.0 % |
|           |                                                         | Y | 11.01 | 69.5 | 21.5 |      | 139.1 |        |
|           |                                                         | Z | 10.54 | 68.3 | 20.8 |      | 126.7 |        |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0)                              | X | 5.07  | 70.1 | 19.4 | 3.76 | 127.5 | ±0.5 % |
|           |                                                         | Y | 5.47  | 71.9 | 20.2 |      | 133.6 |        |
|           |                                                         | Z | 4.93  | 69.5 | 19.0 |      | 124.9 |        |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A)                              | X | 5.01  | 70.2 | 19.5 | 3.77 | 149.3 | ±0.7 % |
|           |                                                         | Y | 5.38  | 71.9 | 20.2 |      | 132.0 |        |
|           |                                                         | Z | 4.94  | 69.9 | 19.2 |      | 146.4 |        |

|           |                                                               |   |       |      |      |      |       |        |
|-----------|---------------------------------------------------------------|---|-------|------|------|------|-------|--------|
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)     | X | 3.20  | 71.2 | 19.8 | 1.54 | 126.8 | ±0.7 % |
|           |                                                               | Y | 3.51  | 72.6 | 20.4 |      | 134.5 |        |
|           |                                                               | Z | 2.79  | 68.1 | 18.1 |      | 148.4 |        |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 10.07 | 68.8 | 21.2 | 8.23 | 147.8 | ±2.7 % |
|           |                                                               | Y | 9.81  | 68.4 | 21.1 |      | 128.4 |        |
|           |                                                               | Z | 10.00 | 68.7 | 21.1 |      | 144.0 |        |
| 10417-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)     | X | 10.07 | 68.8 | 21.2 | 8.23 | 148.4 | ±2.7 % |
|           |                                                               | Y | 9.82  | 68.4 | 21.1 |      | 129.0 |        |
|           |                                                               | Z | 9.99  | 68.7 | 21.1 |      | 144.6 |        |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 8 and 9).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3914

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 9.82    | 9.82    | 9.82    | 0.39               | 0.92                    | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 9.50    | 9.50    | 9.50    | 0.43               | 0.83                    | ± 12.0 %    |
| 1750                 | 40.1                               | 1.37                            | 8.04    | 8.04    | 8.04    | 0.30               | 0.93                    | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 7.86    | 7.86    | 7.86    | 0.35               | 0.86                    | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 7.02    | 7.02    | 7.02    | 0.28               | 1.05                    | ± 12.0 %    |
| 2600                 | 39.0                               | 1.96                            | 6.82    | 6.82    | 6.82    | 0.26               | 1.17                    | ± 12.0 %    |
| 5200                 | 36.0                               | 4.66                            | 5.26    | 5.26    | 5.26    | 0.35               | 1.80                    | ± 13.1 %    |
| 5300                 | 35.9                               | 4.76                            | 5.06    | 5.06    | 5.06    | 0.35               | 1.80                    | ± 13.1 %    |
| 5500                 | 35.6                               | 4.96                            | 4.92    | 4.92    | 4.92    | 0.40               | 1.80                    | ± 13.1 %    |
| 5600                 | 35.5                               | 5.07                            | 4.73    | 4.73    | 4.73    | 0.40               | 1.80                    | ± 13.1 %    |
| 5800                 | 35.3                               | 5.27                            | 4.67    | 4.67    | 4.67    | 0.40               | 1.80                    | ± 13.1 %    |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3914

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 55.5                               | 0.96                            | 9.53    | 9.53    | 9.53    | 0.33               | 1.09                    | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 9.49    | 9.49    | 9.49    | 0.27               | 1.25                    | ± 12.0 %    |
| 1750                 | 53.4                               | 1.49                            | 7.78    | 7.78    | 7.78    | 0.51               | 0.79                    | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 7.49    | 7.49    | 7.49    | 0.73               | 0.64                    | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 7.15    | 7.15    | 7.15    | 0.69               | 0.64                    | ± 12.0 %    |
| 2600                 | 52.5                               | 2.16                            | 6.84    | 6.84    | 6.84    | 0.80               | 0.57                    | ± 12.0 %    |
| 5200                 | 49.0                               | 5.30                            | 4.50    | 4.50    | 4.50    | 0.45               | 1.90                    | ± 13.1 %    |
| 5300                 | 48.9                               | 5.42                            | 4.33    | 4.33    | 4.33    | 0.45               | 1.90                    | ± 13.1 %    |
| 5500                 | 48.6                               | 5.65                            | 3.91    | 3.91    | 3.91    | 0.50               | 1.90                    | ± 13.1 %    |
| 5600                 | 48.5                               | 5.77                            | 3.89    | 3.89    | 3.89    | 0.50               | 1.90                    | ± 13.1 %    |
| 5800                 | 48.2                               | 6.00                            | 4.01    | 4.01    | 4.01    | 0.55               | 1.90                    | ± 13.1 %    |


<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

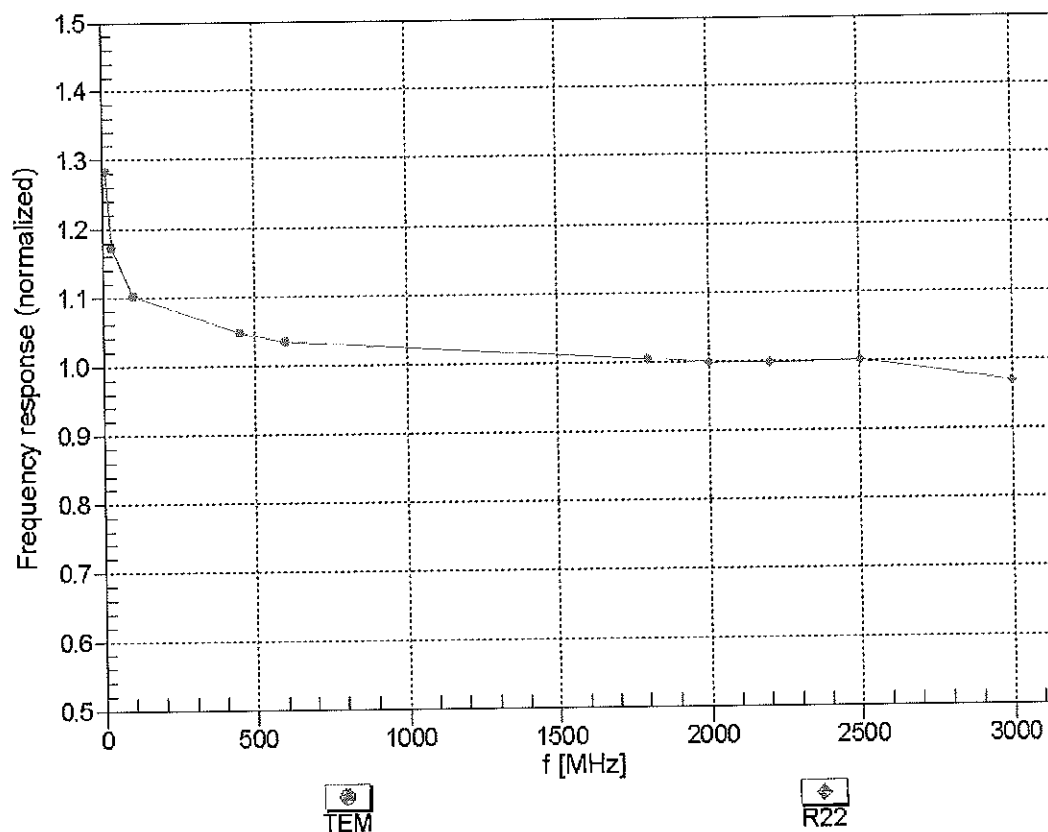



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz, TEM

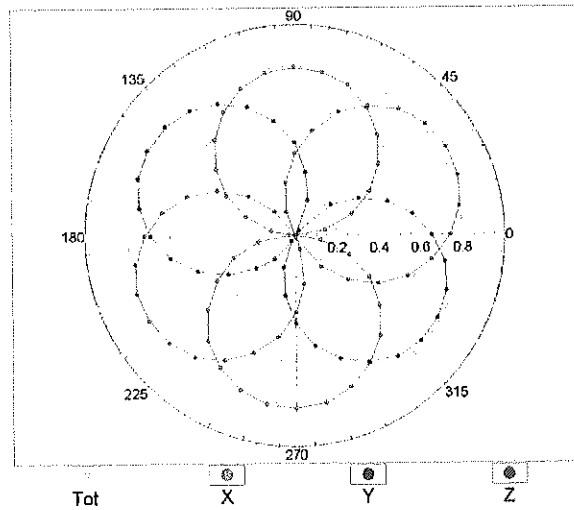


f=1800 MHz, R22

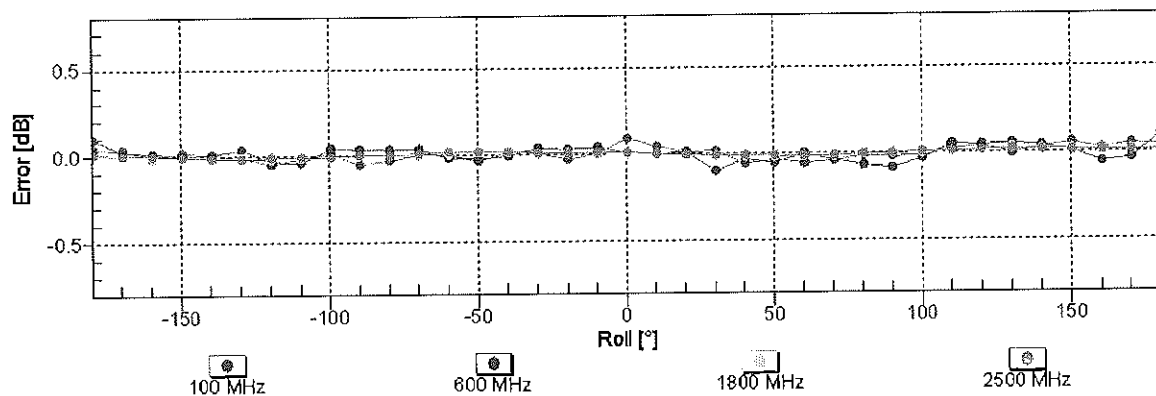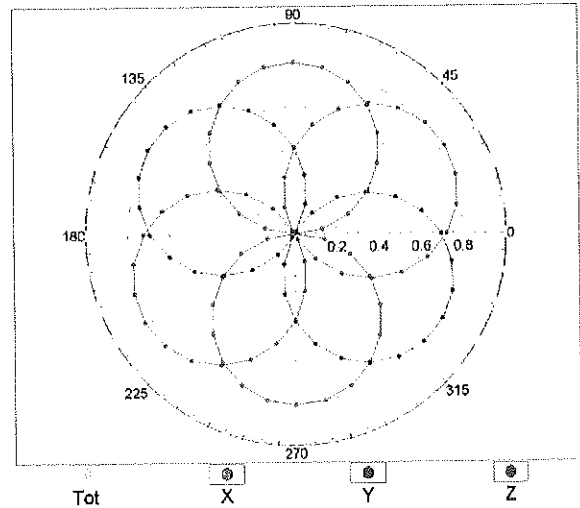

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )


Dynamic Range f(SAR<sub>head</sub>)  
(TEM cell , f<sub>eval</sub>= 1900 MHz)

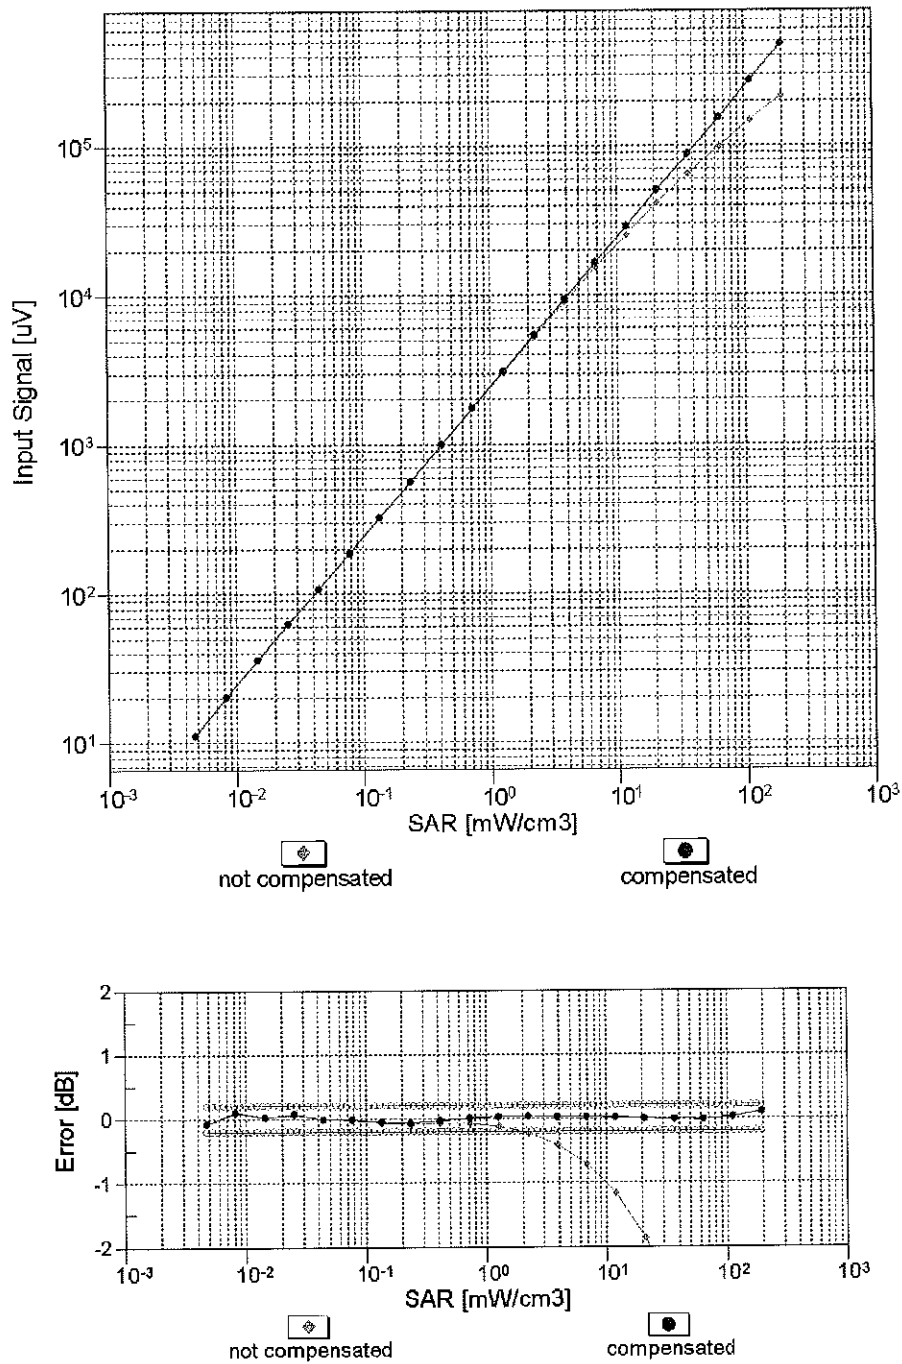


Uncertainty of Linearity Assessment: ± 0.6% (k=2)



# Conversion Factor Assessment

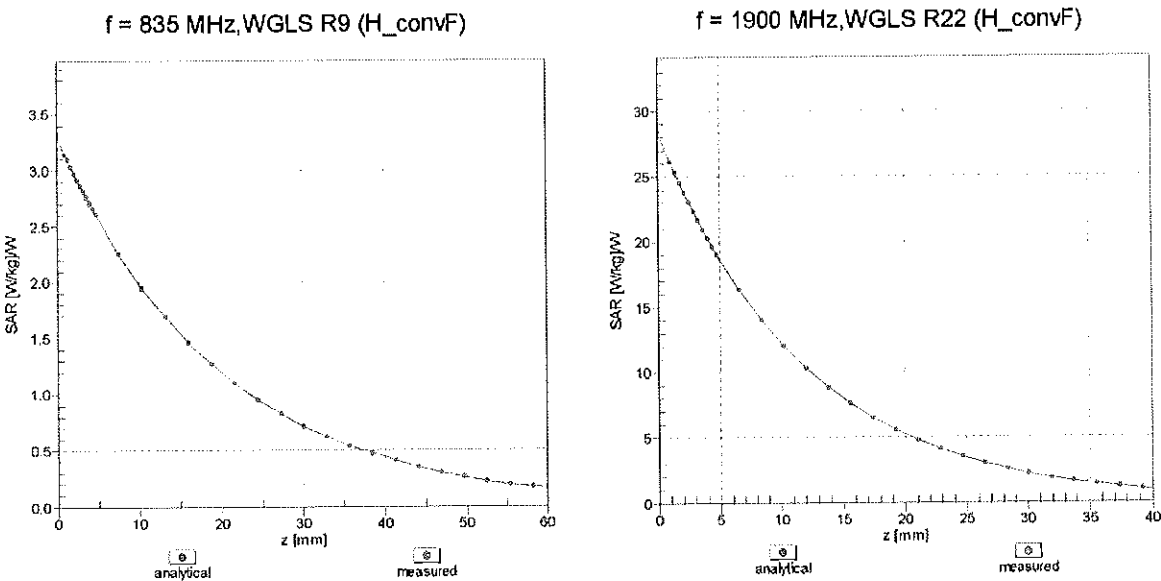

## Deviation from Isotropy in Liquid Error ( $\phi, \theta$ ), $f = 900 \text{ MHz}$

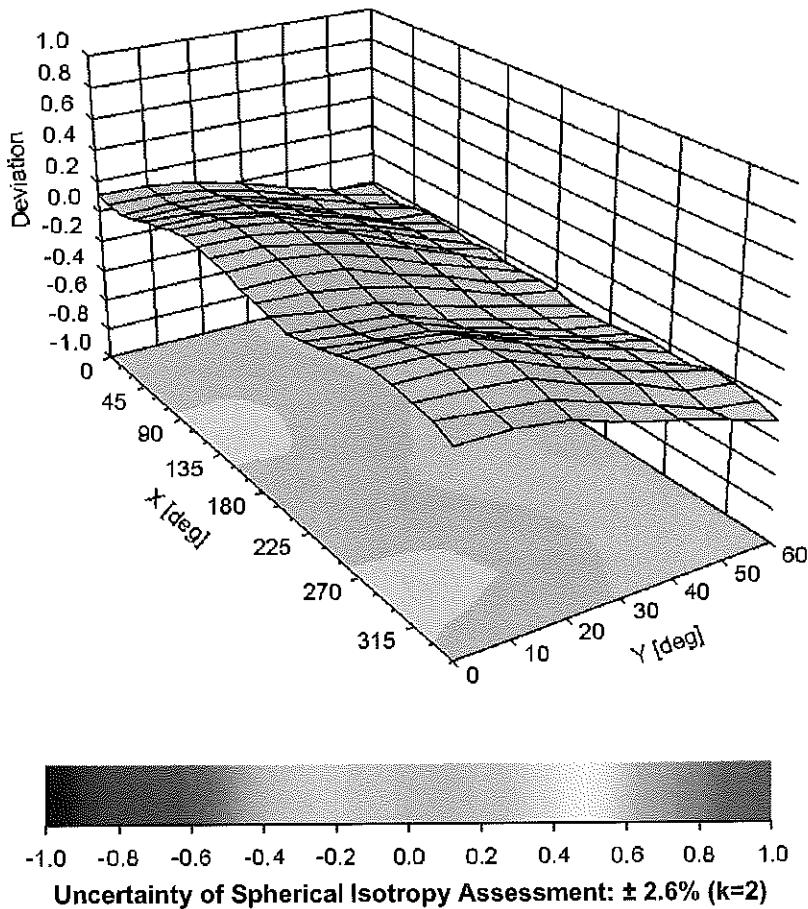

**DASY/EASY - Parameters of Probe: EX3DV4 - SN:3914****Other Probe Parameters**

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -49.5      |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 9 mm       |
| Tip Diameter                                  | 2.5 mm     |
| Probe Tip to Sensor X Calibration Point       | 1 mm       |
| Probe Tip to Sensor Y Calibration Point       | 1 mm       |
| Probe Tip to Sensor Z Calibration Point       | 1 mm       |
| Recommended Measurement Distance from Surface | 1.4 mm     |

## APPENDIX D: SAR TISSUE SPECIFICATIONS

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the tissue. The tissue was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity  $\epsilon'$  can be calculated from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where  $Y$  is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively,  $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$ ,  $\omega$  is the angular frequency, and  $j = \sqrt{-1}$ .

**Table D-I**  
**Composition of the Tissue Equivalent Matter**

| Frequency (MHz)           | 835   | 835   | 1900  | 1900  | 2450-2600  | 2450-2600 | 5200-5800  | 5200-5800 |
|---------------------------|-------|-------|-------|-------|------------|-----------|------------|-----------|
| Tissue                    | Head  | Body  | Head  | Body  | Head       | Body      | Head       | Body      |
| Ingredients (% by weight) |       |       |       |       |            |           |            |           |
| Bactericide               | 0.1   | 0.1   |       |       | See page 2 |           | See page 3 |           |
| DGBE                      |       |       | 44.92 | 29.44 |            | 26.7      |            |           |
| HEC                       | 1     | 1     |       |       |            |           |            |           |
| NaCl                      | 1.45  | 0.94  | 0.18  | 0.39  |            | 0.1       |            |           |
| Sucrose                   | 57    | 44.9  |       |       |            |           |            |           |
| Polysorbate (Tween) 80    |       |       |       |       |            |           |            | 20        |
| Water                     | 40.45 | 53.06 | 54.9  | 70.17 |            | 73.2      |            | 80        |

|                                           |                                                                                     |                                   |                                                                                       |                                        |
|-------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> A3LSMA8000                 |  | <b>SAR EVALUATION REPORT</b>      |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Dates:</b><br>05/14/15 - 05/26/15 | <b>DUT Type:</b><br>Portable Handset                                                | <b>APPENDIX D:</b><br>Page 1 of 3 |                                                                                       |                                        |

## 2 Composition / Information on ingredients

The Item is composed of the following ingredients:

|                                               |                                                                                                                       |
|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| H <sub>2</sub> O                              | Water, 52 – 75%                                                                                                       |
| C <sub>8</sub> H <sub>18</sub> O <sub>3</sub> | Diethylene glycol monobutyl ether (DGBE), 25 – 48%<br>(CAS-No. 112-34-5, EC-No. 203-961-6, EC-index-No. 603-096-00-8) |
|                                               | Relevant for safety; Refer to the respective Safety Data Sheet*.                                                      |
| NaCl                                          | Sodium Chloride, <1.0%                                                                                                |

Figure D-1

### Composition of 2.4 GHz Head Tissue Equivalent Matter

**Note:** 2.4 GHz head liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

#### Measurement Certificate / Material Test

|              |                                           |
|--------------|-------------------------------------------|
| Item Name    | Head Tissue Simulating Liquid (HSL2450V2) |
| Product No.  | SL AAH 245 BA (Charge: 130926-1)          |
| Manufacturer | SPEAG                                     |

#### Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

#### Setup Validation

Validation results were within  $\pm 2.5\%$  towards the target values of Methanol.

#### Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

#### Test Condition

|                 |                                                             |
|-----------------|-------------------------------------------------------------|
| Ambient         | Environment temperatur ( $22 \pm 3$ )°C and humidity < 70%. |
| TSL Temperature | 23°C                                                        |
| Test Date       | 2-Oct-13                                                    |
| Operator        | CL                                                          |

#### Additional Information

|                   |                         |
|-------------------|-------------------------|
| TSL Density       | 0.988 g/cm <sup>3</sup> |
| TSL Heat-capacity | 3.680 kJ/(kg*K)         |

| f [MHz] | HP-e' | HP-e'' | sigma | eps  | sigma | Δ-eps | Δ-sigma |
|---------|-------|--------|-------|------|-------|-------|---------|
| 1900    | 40.3  | 11.88  | 1.26  | 40.0 | 1.40  | 0.9   | -10.3   |
| 1925    | 40.3  | 11.98  | 1.28  | 40.0 | 1.40  | 0.6   | -8.3    |
| 1950    | 40.2  | 12.08  | 1.31  | 40.0 | 1.40  | 0.4   | -6.4    |
| 1975    | 40.1  | 12.15  | 1.34  | 40.0 | 1.40  | 0.2   | -4.6    |
| 2000    | 40.0  | 12.23  | 1.36  | 40.0 | 1.40  | -0.1  | -2.8    |
| 2025    | 39.9  | 12.34  | 1.39  | 40.0 | 1.42  | -0.2  | -2.3    |
| 2050    | 39.8  | 12.45  | 1.42  | 39.9 | 1.44  | -0.3  | -1.7    |
| 2075    | 39.7  | 12.54  | 1.45  | 39.9 | 1.47  | -0.4  | -1.3    |
| 2100    | 39.6  | 12.64  | 1.48  | 39.8 | 1.49  | -0.5  | -0.8    |
| 2125    | 39.5  | 12.69  | 1.50  | 39.8 | 1.51  | -0.7  | -0.7    |
| 2150    | 39.4  | 12.75  | 1.52  | 39.7 | 1.53  | -0.8  | -0.6    |
| 2175    | 39.3  | 12.84  | 1.55  | 39.7 | 1.56  | -1.0  | -0.1    |
| 2200    | 39.2  | 12.94  | 1.58  | 39.6 | 1.58  | -1.2  | 0.4     |
| 2225    | 39.1  | 13.00  | 1.61  | 39.6 | 1.60  | -1.3  | 0.6     |
| 2250    | 39.0  | 13.07  | 1.64  | 39.6 | 1.62  | -1.4  | 0.8     |
| 2275    | 38.9  | 13.15  | 1.66  | 39.5 | 1.64  | -1.5  | 1.2     |
| 2300    | 38.8  | 13.22  | 1.69  | 39.5 | 1.67  | -1.7  | 1.5     |
| 2325    | 38.7  | 13.32  | 1.72  | 39.4 | 1.69  | -1.9  | 2.0     |
| 2350    | 38.6  | 13.42  | 1.75  | 39.4 | 1.71  | -2.0  | 2.5     |
| 2375    | 38.5  | 13.49  | 1.78  | 39.3 | 1.73  | -2.1  | 2.8     |
| 2400    | 38.4  | 13.56  | 1.81  | 39.3 | 1.76  | -2.3  | 3.1     |
| 2425    | 38.3  | 13.63  | 1.84  | 39.2 | 1.78  | -2.5  | 3.5     |
| 2450    | 38.2  | 13.71  | 1.87  | 39.2 | 1.80  | -2.6  | 3.8     |
| 2475    | 38.1  | 13.79  | 1.90  | 39.2 | 1.83  | -2.8  | 3.9     |
| 2500    | 38.0  | 13.87  | 1.93  | 39.1 | 1.85  | -3.0  | 4.0     |
| 2525    | 37.9  | 13.96  | 1.96  | 39.1 | 1.88  | -3.1  | 4.2     |
| 2550    | 37.8  | 14.05  | 1.99  | 39.1 | 1.91  | -3.3  | 4.4     |
| 2575    | 37.7  | 14.11  | 2.02  | 39.0 | 1.94  | -3.5  | 4.4     |
| 2600    | 37.5  | 14.17  | 2.05  | 39.0 | 1.96  | -3.8  | 4.4     |
| 2625    | 37.4  | 14.23  | 2.08  | 39.0 | 1.99  | -4.0  | 4.4     |
| 2650    | 37.3  | 14.30  | 2.11  | 38.9 | 2.02  | -4.2  | 4.5     |
| 2675    | 37.2  | 14.37  | 2.14  | 38.9 | 2.05  | -4.4  | 4.6     |
| 2700    | 37.1  | 14.45  | 2.17  | 38.9 | 2.07  | -4.6  | 4.7     |

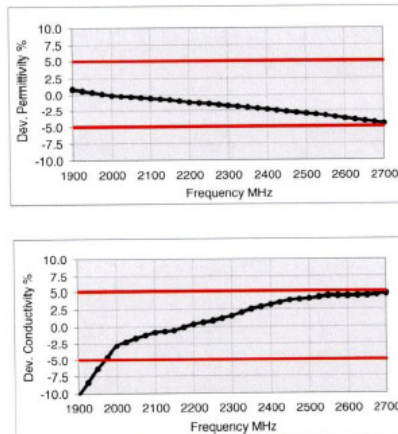


Figure D-2

### 2.4 GHz Head Tissue Equivalent Matter

|                                    |                                                                                     |                       |                                                                                       |                                 |
|------------------------------------|-------------------------------------------------------------------------------------|-----------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                 |  | SAR EVALUATION REPORT |  | Reviewed by:<br>Quality Manager |
| Test Dates:<br>05/14/15 - 05/26/15 | DUT Type:<br>Portable Handset                                                       |                       |                                                                                       | APPENDIX D:<br>Page 2 of 3      |

## 2 Composition / Information on ingredients

The Item is composed of the following ingredients:

|             |          |
|-------------|----------|
| Water       | 50 – 65% |
| Mineral oil | 10 – 30% |
| Emulsifiers | 8 – 25%  |
| Sodium salt | 0 – 1.5% |

**Figure D-3**  
**Composition of 5 GHz Head Tissue Equivalent Matter**

**Note:** 5GHz head liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

### Measurement Certificate / Material Test

|              |                                                 |
|--------------|-------------------------------------------------|
| Item Name    | Head Tissue Simulating Liquid (HBBL3500-5800V5) |
| Product No.  | SL AAH 502 AC (Charge: 130903-1)                |
| Manufacturer | SPEAG                                           |

### Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

### Setup Validation

Validation results were within  $\pm 2.5\%$  towards the target values of Methanol.

### Target Parameters


Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

### Test Condition

|                 |                                                             |
|-----------------|-------------------------------------------------------------|
| Ambient         | Environment temperatur ( $22 \pm 3$ )°C and humidity < 70%. |
| TSL Temperature | 22°C                                                        |
| Test Date       | 4-Sep-13                                                    |
| Operator        | IEN                                                         |

### Additional Information

|                   |                         |
|-------------------|-------------------------|
| TSL Density       | 0.985 g/cm <sup>3</sup> |
| TSL Heat-capacity | 3.383 kJ/(kg*K)         |

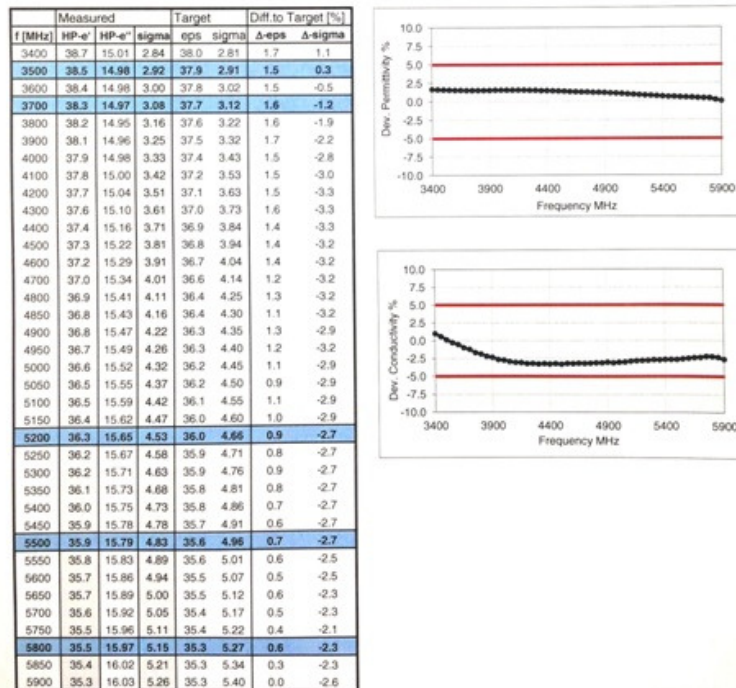

**Figure D-4**  
**5GHz Head Tissue Equivalent Matter**

|                                    |                                                                                     |                       |                                                                                       |                                 |
|------------------------------------|-------------------------------------------------------------------------------------|-----------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                 |  | SAR EVALUATION REPORT |  | Reviewed by:<br>Quality Manager |
| Test Dates:<br>05/14/15 - 05/26/15 | DUT Type:<br>Portable Handset                                                       |                       |                                                                                       | APPENDIX D:<br>Page 3 of 3      |

## APPENDIX E: SAR SYSTEM VALIDATION

Per FCC KDB 865664 D02v01, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in FCC KDB 865664 D01 v01 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

**Table E-I**  
**SAR System Validation Summary – 1g**

| SAR SYSTEM # | FREQ. [MHz] | DATE       | PROBE SN | PROBE TYPE | PROBE CAL. POINT |      | COND. | PERM.             | CW VALIDATION |                 |                | MOD. VALIDATION |             |      |
|--------------|-------------|------------|----------|------------|------------------|------|-------|-------------------|---------------|-----------------|----------------|-----------------|-------------|------|
|              |             |            |          |            |                  |      | (σ)   | (ε <sub>r</sub> ) | SENSITIVITY   | PROBE LINEARITY | PROBE ISOTROPY | MOD. TYPE       | DUTY FACTOR | PAR  |
| K            | 835         | 10/13/2014 | 3288     | ES3DV3     | 835              | Head | 0.926 | 41.940            | PASS          | PASS            | PASS           | GMSK            | PASS        | N/A  |
| G            | 1900        | 4/8/2015   | 3318     | ES3DV3     | 1900             | Head | 1.447 | 40.150            | PASS          | PASS            | PASS           | GMSK            | PASS        | N/A  |
| G            | 2450        | 4/16/2015  | 3318     | ES3DV3     | 2450             | Head | 1.842 | 40.370            | PASS          | PASS            | PASS           | OFDM/TDD        | PASS        | PASS |
| G            | 2600        | 4/16/2015  | 3318     | ES3DV3     | 2600             | Head | 2.021 | 39.780            | PASS          | PASS            | PASS           | TDD             | PASS        | N/A  |
| D            | 5300        | 5/21/2015  | 7357     | EX3DV4     | 5300             | Head | 4.592 | 36.469            | PASS          | PASS            | PASS           | OFDM            | N/A         | PASS |
| D            | 5500        | 5/21/2015  | 7357     | EX3DV4     | 5500             | Head | 4.798 | 36.206            | PASS          | PASS            | PASS           | OFDM            | N/A         | PASS |
| D            | 5800        | 5/21/2015  | 7357     | EX3DV4     | 5800             | Head | 5.109 | 35.781            | PASS          | PASS            | PASS           | OFDM            | N/A         | PASS |
| D            | 835         | 4/8/2015   | 3209     | ES3DV3     | 835              | Body | 1.007 | 54.130            | PASS          | PASS            | PASS           | GMSK            | PASS        | N/A  |
| G            | 835         | 5/26/2015  | 3318     | ES3DV3     | 835              | Body | 1.018 | 53.930            | PASS          | PASS            | PASS           | GMSK            | PASS        | N/A  |
| H            | 1900        | 5/8/2015   | 3258     | ES3DV3     | 1900             | Body | 1.555 | 51.820            | PASS          | PASS            | PASS           | GMSK            | PASS        | N/A  |
| E            | 2450        | 11/3/2014  | 3332     | ES3DV3     | 2450             | Body | 1.996 | 52.210            | PASS          | PASS            | PASS           | OFDM/TDD        | PASS        | PASS |
| E            | 2600        | 11/3/2014  | 3332     | ES3DV3     | 2600             | Body | 2.210 | 51.630            | PASS          | PASS            | PASS           | TDD             | PASS        | N/A  |
| A            | 5300        | 2/19/2015  | 3914     | EX3DV4     | 5300             | Body | 5.181 | 47.440            | PASS          | PASS            | PASS           | OFDM            | N/A         | PASS |
| A            | 5500        | 2/19/2015  | 3914     | EX3DV4     | 5500             | Body | 5.464 | 46.920            | PASS          | PASS            | PASS           | OFDM            | N/A         | PASS |
| A            | 5800        | 2/19/2015  | 3914     | EX3DV4     | 5800             | Body | 5.942 | 46.310            | PASS          | PASS            | PASS           | OFDM            | N/A         | PASS |

**Table E-II**  
**SAR System Validation Summary – 10g**

| SAR SYSTEM # | FREQ. [MHz] | DATE      | PROBE SN | PROBE TYPE | PROBE CAL. POINT |      | COND. | PERM.             | CW VALIDATION |                 |                | MOD. VALIDATION |             |      |
|--------------|-------------|-----------|----------|------------|------------------|------|-------|-------------------|---------------|-----------------|----------------|-----------------|-------------|------|
|              |             |           |          |            |                  |      | (σ)   | (ε <sub>r</sub> ) | SENSITIVITY   | PROBE LINEARITY | PROBE ISOTROPY | MOD. TYPE       | DUTY FACTOR | PAR  |
| A            | 5300        | 2/19/2015 | 3914     | EX3DV4     | 5300             | Body | 5.181 | 47.440            | PASS          | PASS            | PASS           | OFDM            | N/A         | PASS |
| A            | 5500        | 2/19/2015 | 3914     | EX3DV4     | 5500             | Body | 5.464 | 46.920            | PASS          | PASS            | PASS           | OFDM            | N/A         | PASS |

NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to KDB 865664.

|                                    |                                                                                     |                            |                                                                                       |                                 |
|------------------------------------|-------------------------------------------------------------------------------------|----------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: A3LSMA8000                 |  | SAR EVALUATION REPORT      |  | Reviewed by:<br>Quality Manager |
| Test Dates:<br>05/14/15 - 05/26/15 | DUT Type:<br>Portable Handset                                                       | APPENDIX E:<br>Page 1 of 1 |                                                                                       |                                 |