



FCC CFR47 PART 15 SUBPART C

**BLUETOOTH LOW ENERGY
CERTIFICATION TEST REPORT**

FOR

GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n

MODEL NUMBER: SM-G110B/DS, SM-G110B

FCC ID: A3LSMG110B

REPORT NUMBER: 14I17675-3 REVISION B

ISSUE DATE: MAY 28, 2014

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	5/5/14	Initial Issue	P. Zhang
A	5/23/14	Updated AC line conducted	P. Zhang
B	5/28/14	Updated statement	P. Zhang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. SAMPLE CALCULATION	5
4.3. MEASUREMENT UNCERTAINTY	5
5. EQUIPMENT UNDER TEST	6
5.1. DESCRIPTION OF EUT	6
5.2. MAXIMUM OUTPUT POWER.....	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	6
5.4. SOFTWARE AND FIRMWARE.....	6
5.5. WORST-CASE CONFIGURATION AND MODE.....	7
5.6. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. SUMMARY	11
8. ANTENNA PORT TEST RESULTS	11
8.1. 6 dB BANDWIDTH.....	12
8.2. 99% BANDWIDTH.....	15
8.3. OUTPUT POWER.....	18
8.4. AVERAGE POWER.....	21
8.5. POWER SPECTRAL DENSITY	22
8.6. CONDUCTED SPURIOUS EMISSIONS.....	25
9. RADIATED TEST RESULTS.....	29
9.1. LIMITS AND PROCEDURE	29
9.2. TRANSMITTER ABOVE 1 GHz	30
WORST-CASE BELOW 1 GHz	43
10. AC POWER LINE CONDUCTED EMISSIONS	46
11. SETUP PHOTOS	51

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

EUT DESCRIPTION: GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n

MODEL: SM-G110B/DS, SM-G110B

SERIAL NUMBER: FL-165-A (Conducted), FL-165-C (Radiated)

DATE TESTED: APRIL 29 – MAY 5, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

Tested By:



CHARLES VERGONIO
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n; SM-G110B/DS is the dual SIM model and SM-G110B is the single SIM model. SM-G110B/DS consider as the worst case and reported final test result.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402-2480	BLE	6.31	4.28

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -1.26 dBi.

5.4. SOFTWARE AND FIRMWARE

Software version was G110BXXU0AND1.

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	ETA3U30	N/A	N/A
Earphone	Samsung	N/A	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

EUT was set in the Hidden menu mode to enable BLE communications.

SETUP DIAGRAM FOR TESTS

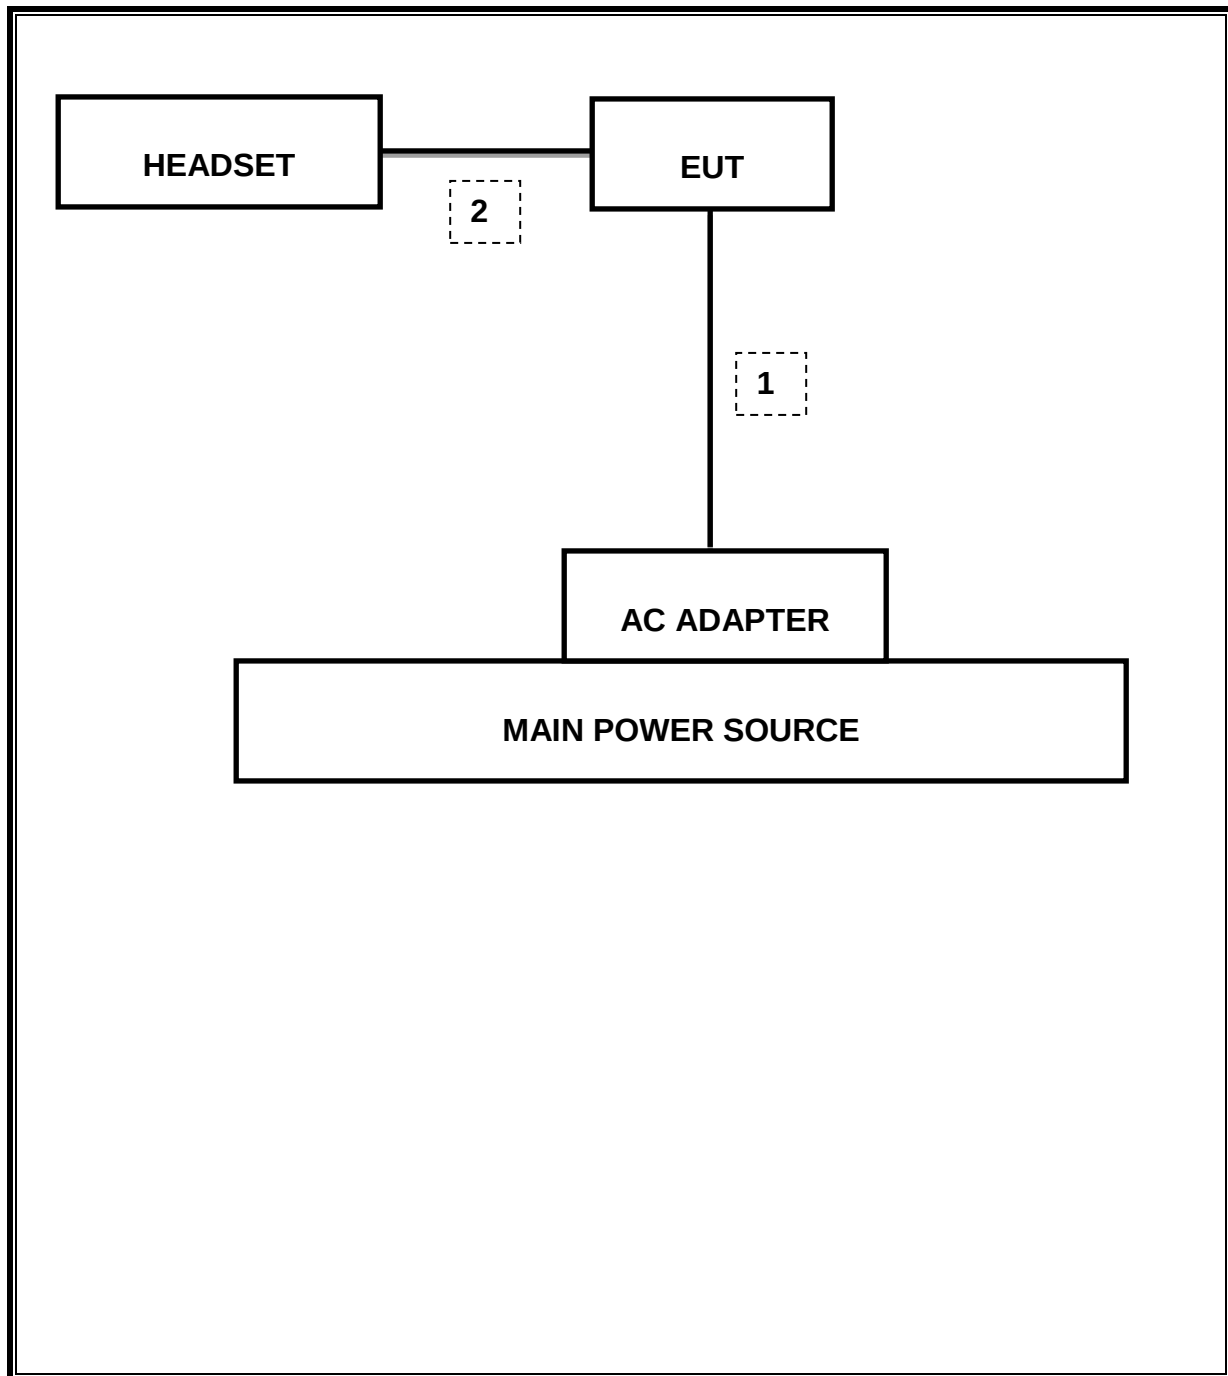

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C00986	4/1/2015
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01179	2/26/2015
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	8/8/2014
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	5/8/2014
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	10/22/2014
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	N/A	3/6/2015
Antenna, Horn, 18 GHz	ETS	3117	C01022	2/21/2015
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	12/17/2014
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/2014
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/2014
LISN, 30 MHz	FCC	50/250-25-2	C00626	1/14/2015

7. SUMMARY

8.

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	RSS-210 A8.2(a)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	0.746 MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-30dBc		Pass	-51.73dBm
15.247	RSS-210 A8.4	TX conducted output power	<30dBm		Pass	6.31dBm
15.247	RSS-210 A8.2	PSD	<8dBm		Pass	-11.912dBm
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	38.10dBuV(AV)
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	43.15dBuV/m

ANTENNA PORT TEST RESULTS

8.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.754	0.5
Middle	2440	0.752	0.5
High	2480	0.746	0.5

6 dB BANDWIDTH

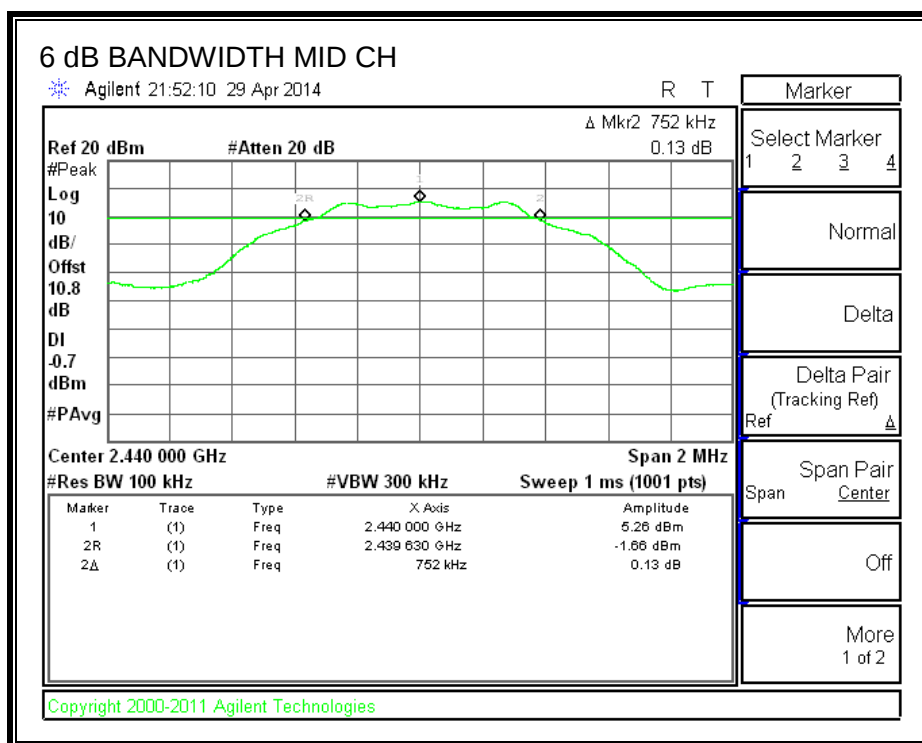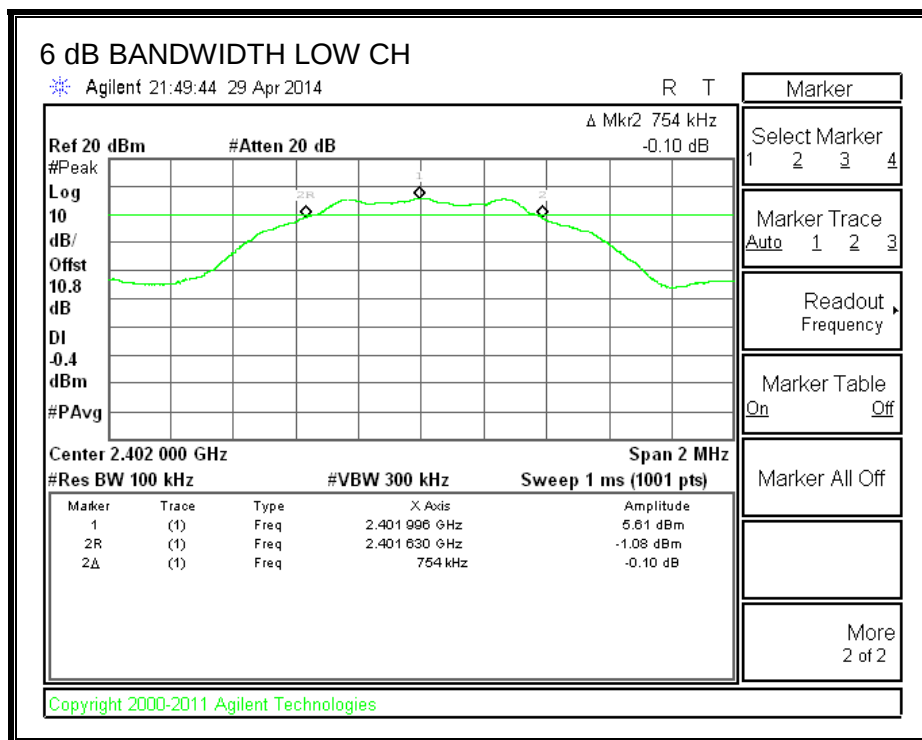

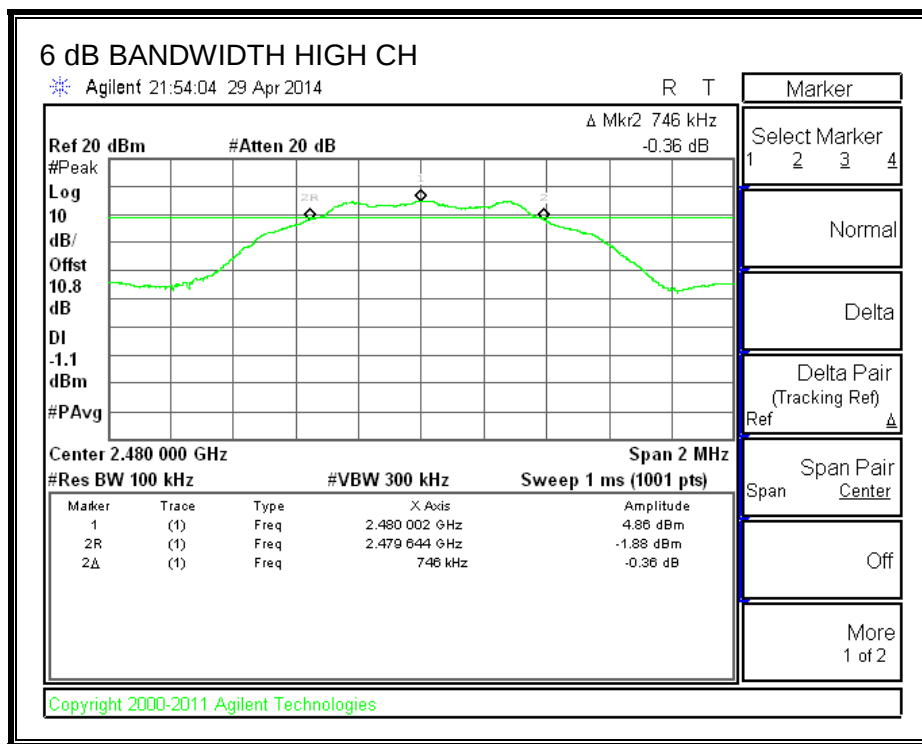

8.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.



TEST PROCEDURE


Reference to KDB558074 D01 DTS Meas Guidance v03r01: The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0576
Middle	2440	1.0577
High	2480	1.0586

99% BANDWIDTH

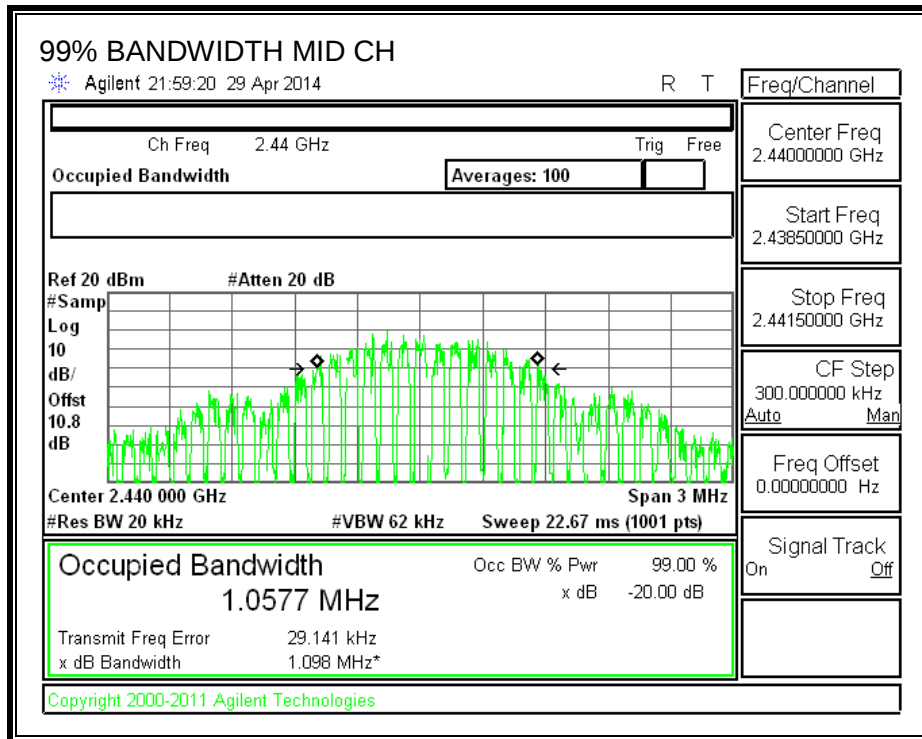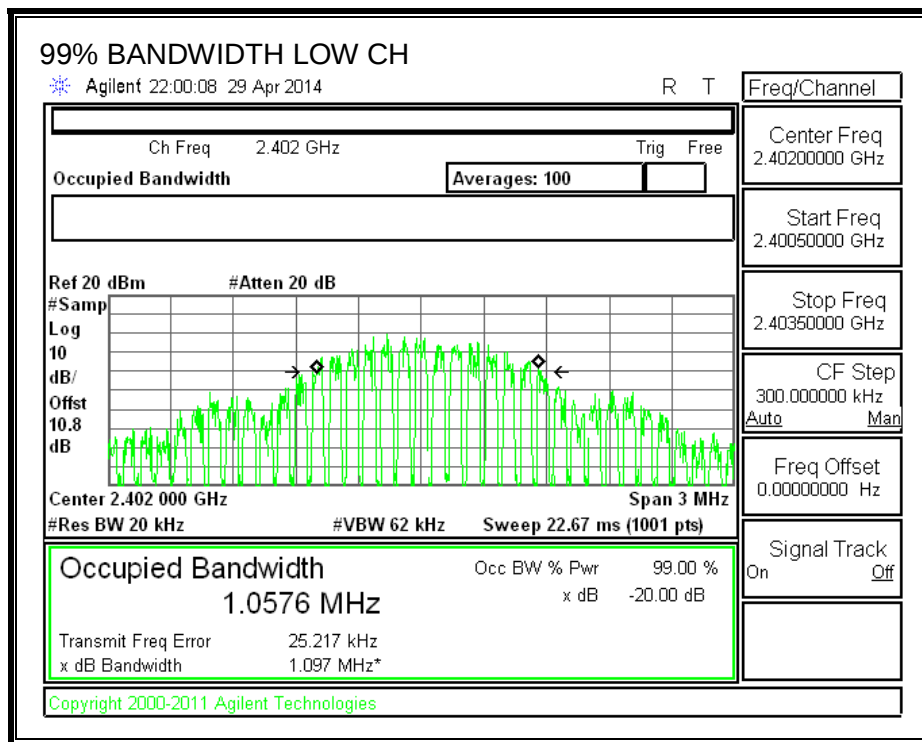

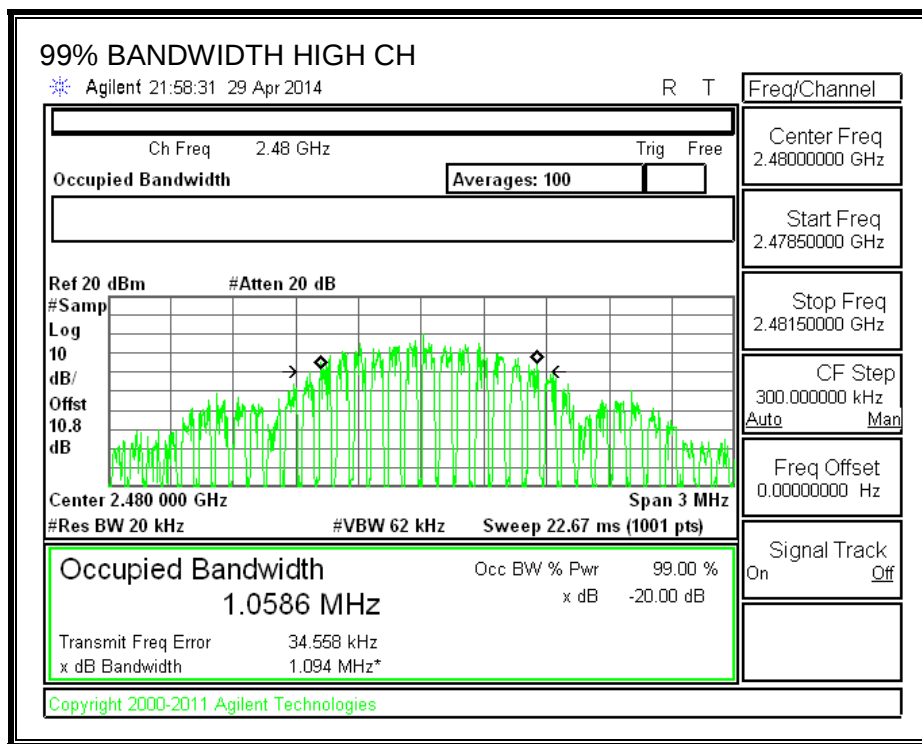

8.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.



TEST PROCEDURE


Peak power is measured using KDB558074 D01 DTS Meas Guidance v03r01 April 9, 2013 under section 9.1.1 utilizing spectrum analyzer.

RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	6.31	30	-23.690
Middle	2440	5.94	30	-24.060
High	2480	5.57	30	-24.430

OUTPUT POWER

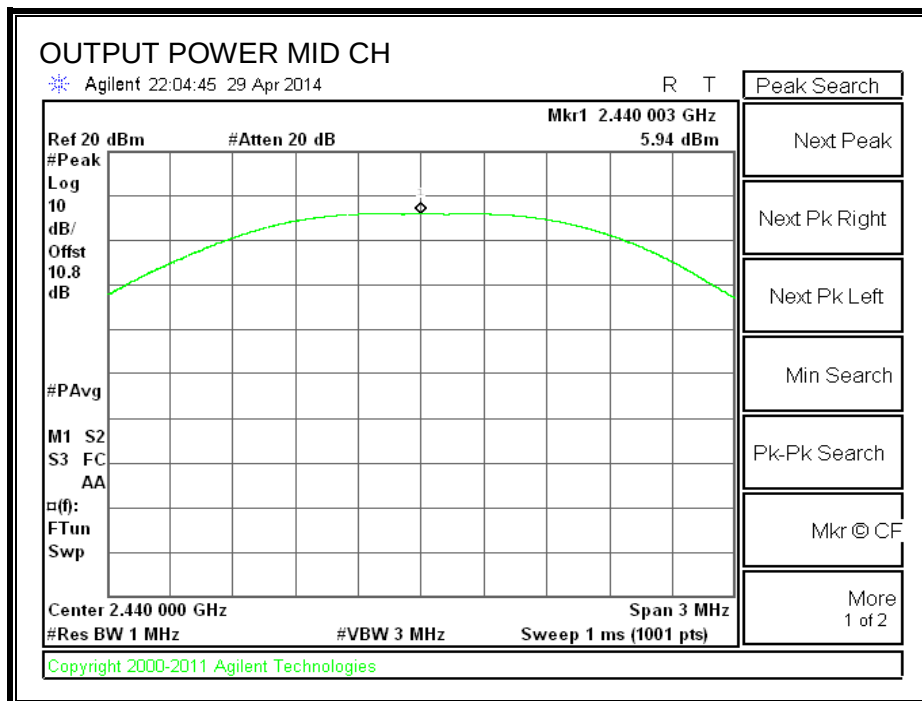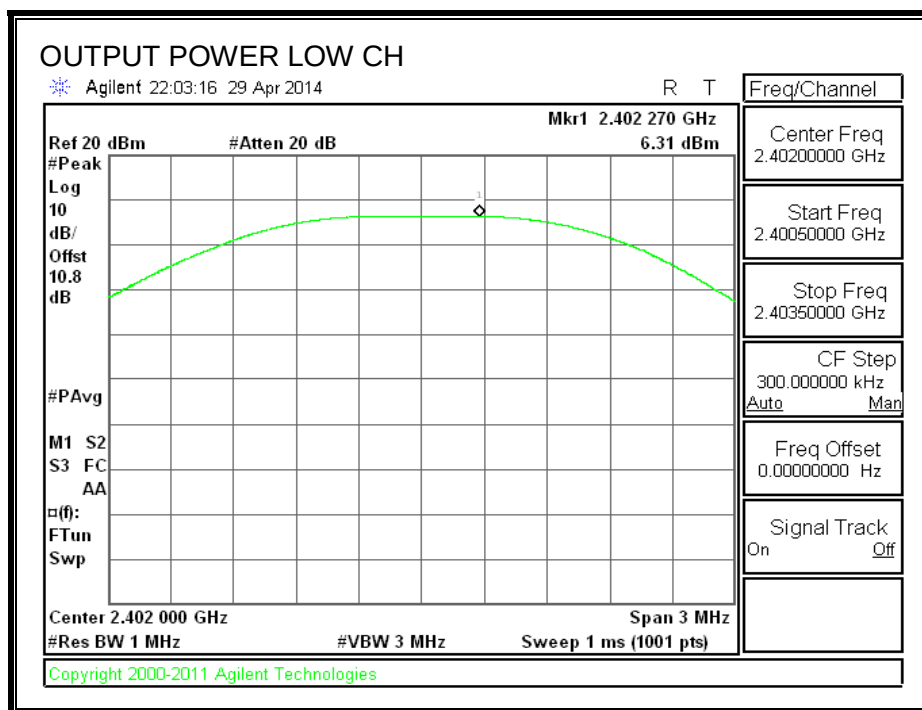

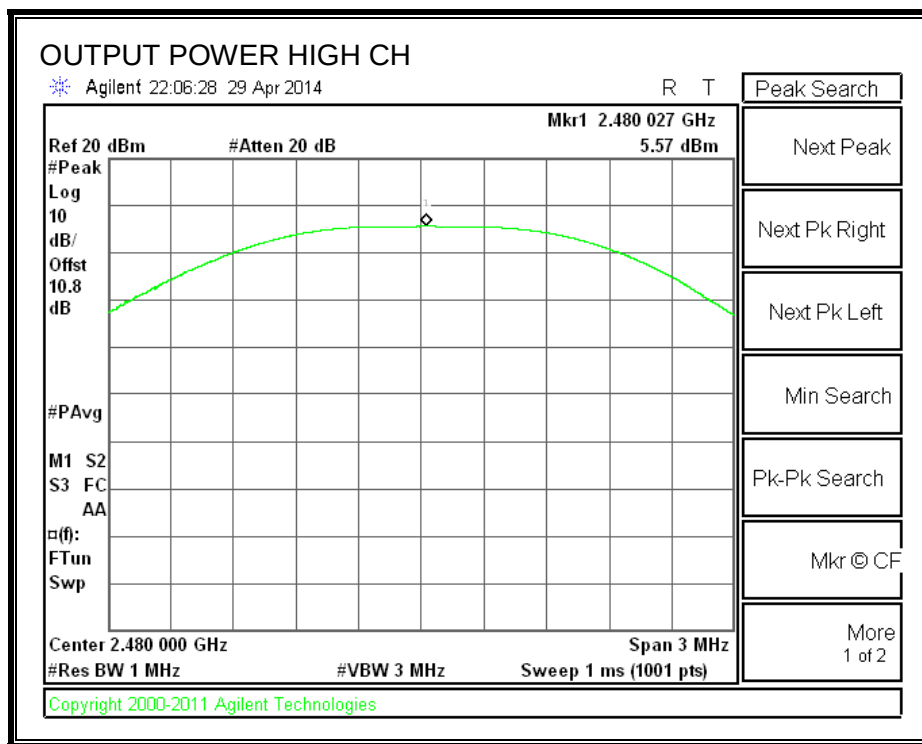

8.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	4.91
Middle	2440	4.52
High	2480	4.15

8.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



TEST PROCEDURE


Power Spectral Density was performed utilizing the "Method PKPSD (Peak PSD)" under KDB558074 D01 DTS Meas Guidance v03r01, April 9, 2013

RESULTS

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-11.912	8	-19.91
Middle	2440	-12.383	8	-20.38
High	2480	-12.773	8	-20.77

POWER SPECTRAL DENSITY

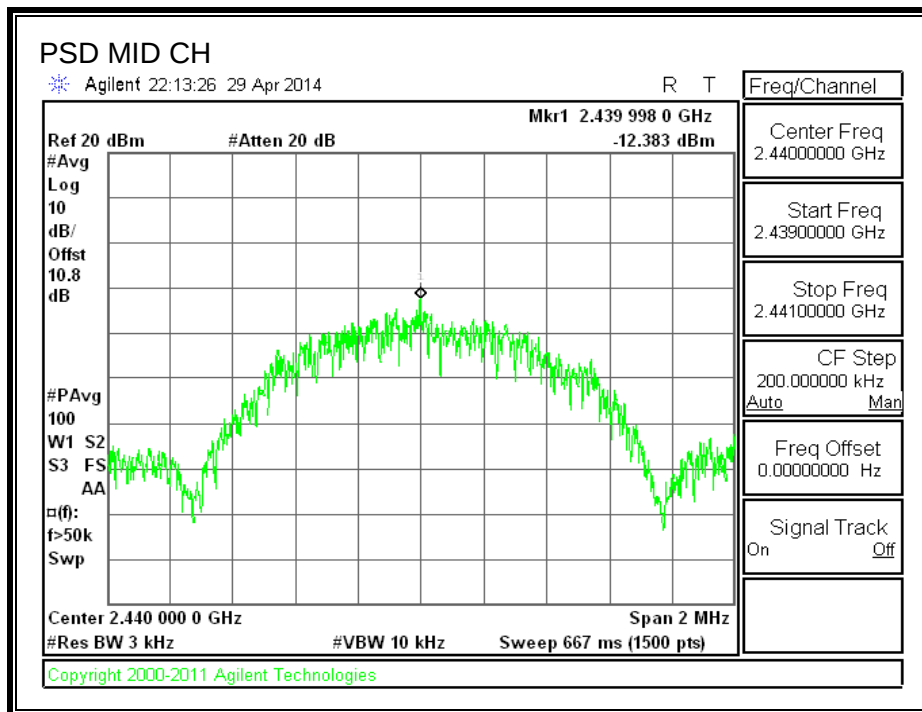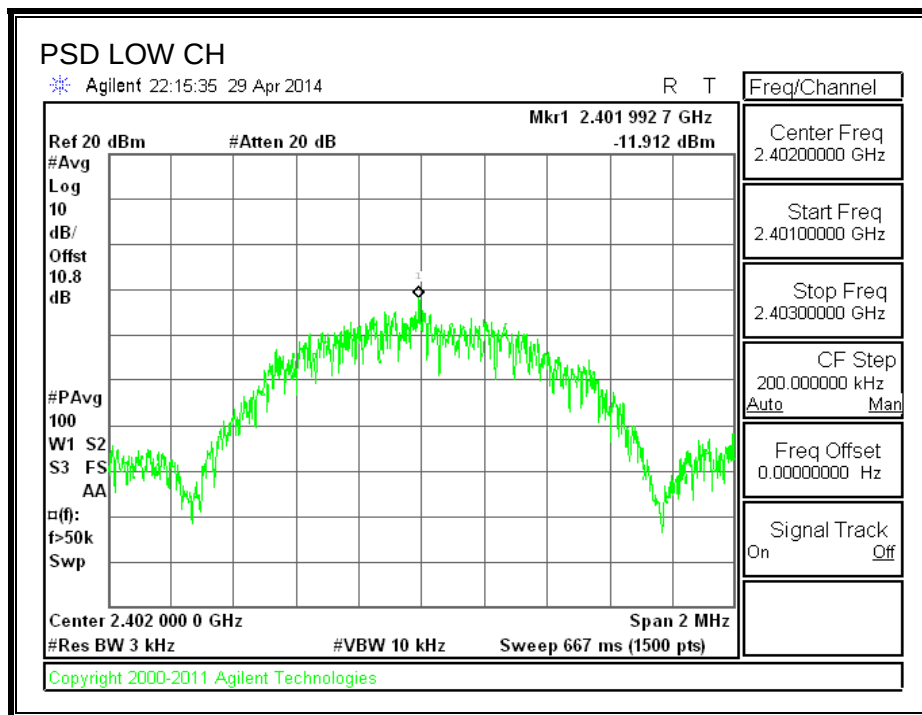

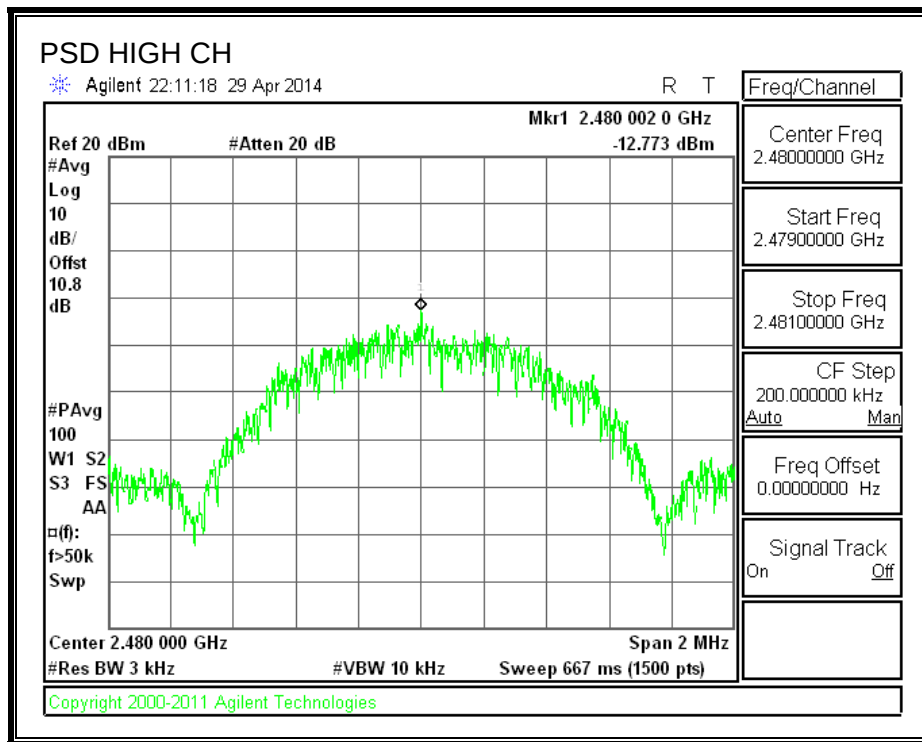

8.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

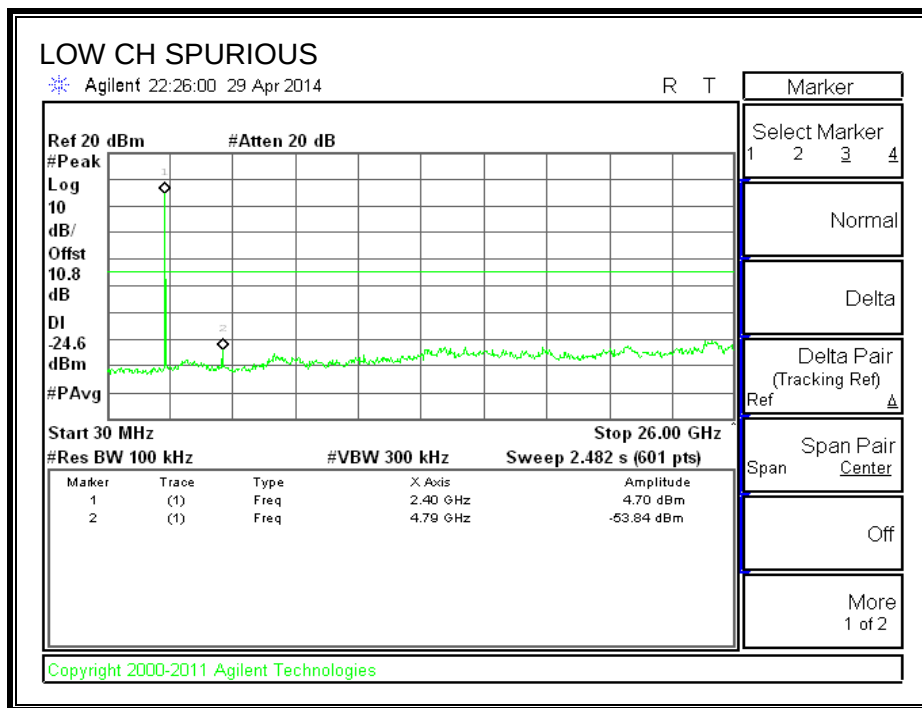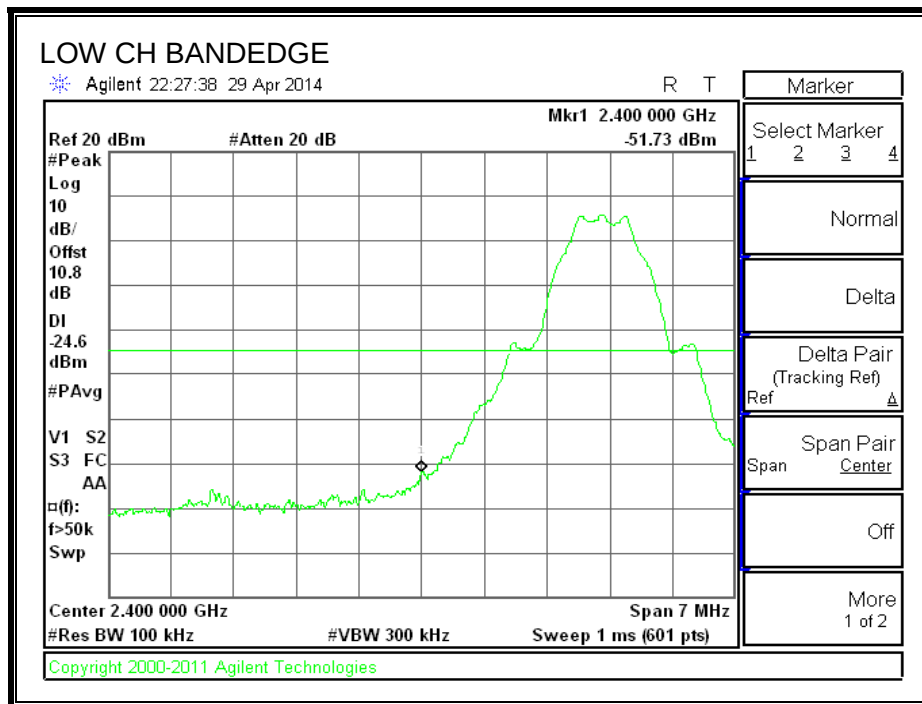

SPURIOUS EMISSIONS, MID CHANNEL

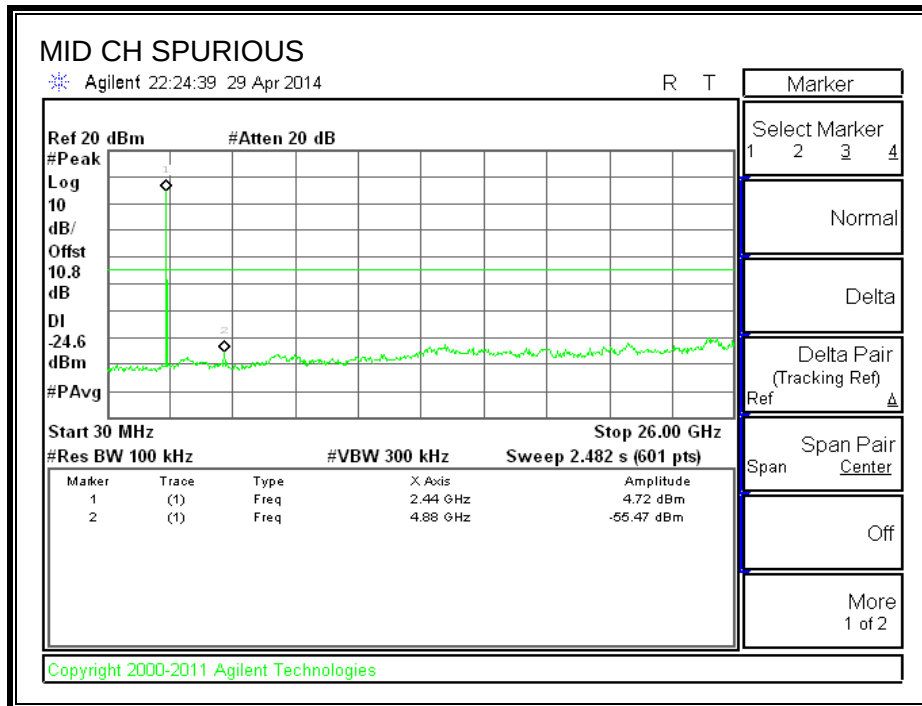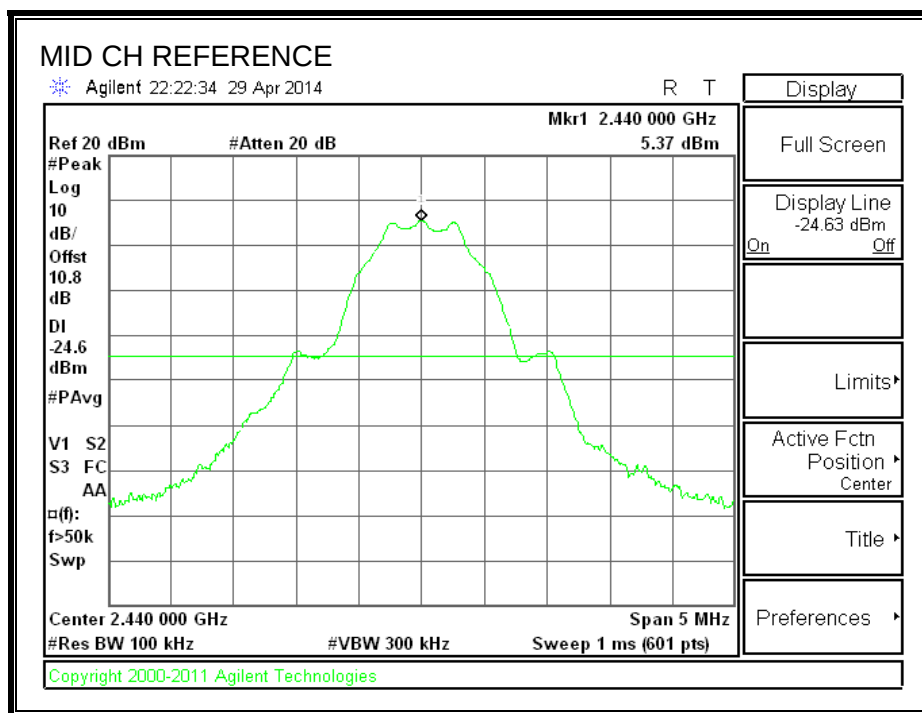

SPURIOUS EMISSIONS, HIGH CHANNEL

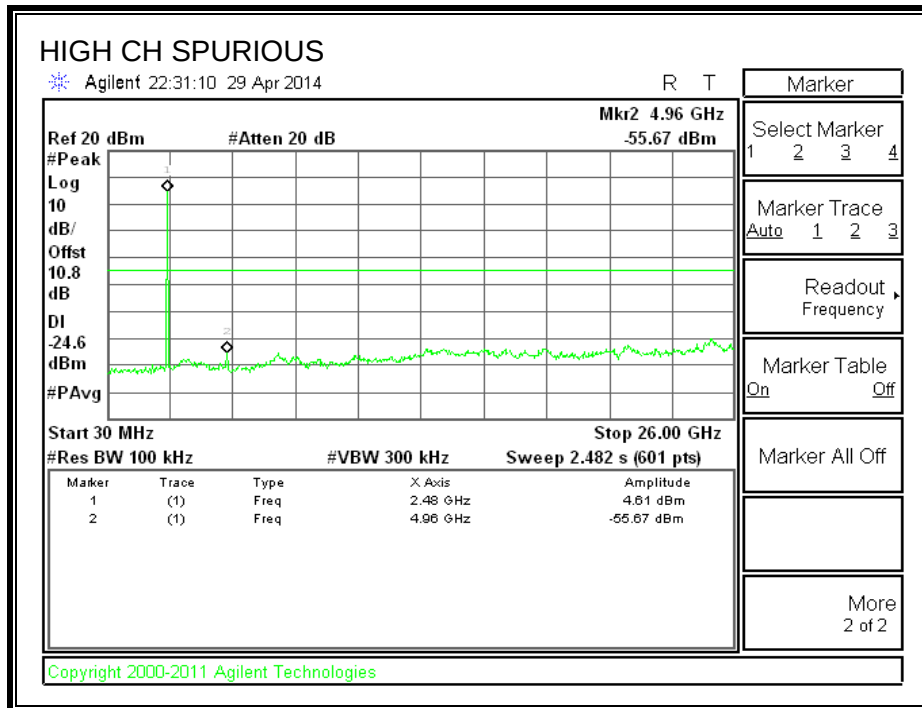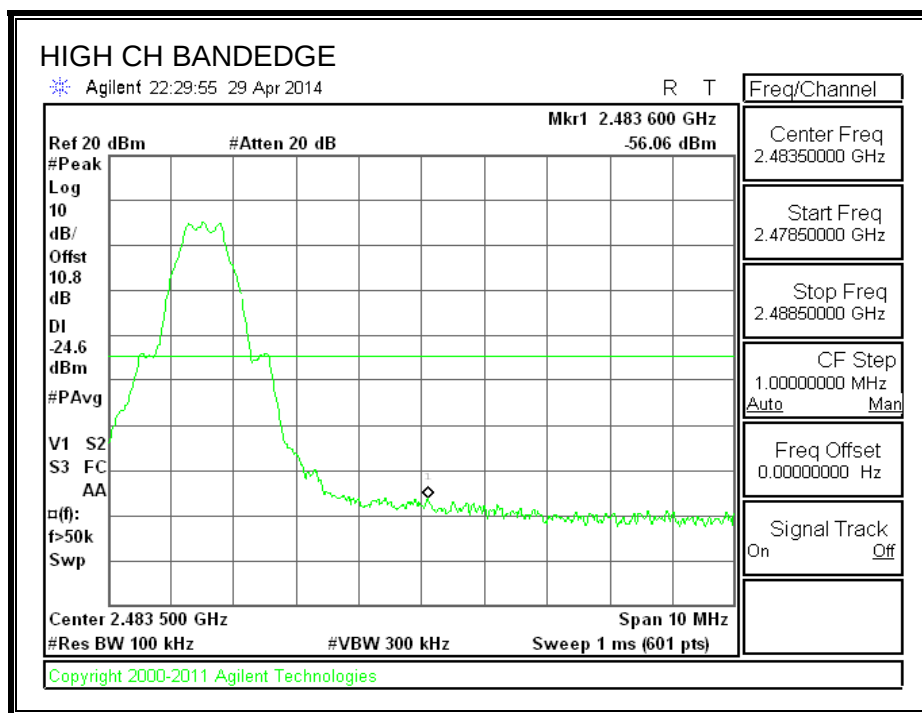

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4 - 2009. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor = $10 \log(1/x)$. For this sample: DCF = $10\log(1/0.618)=2.08\text{dB}$ (Spectrum Analyzer round it up to 2.1dB)

The spectrum from 1GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

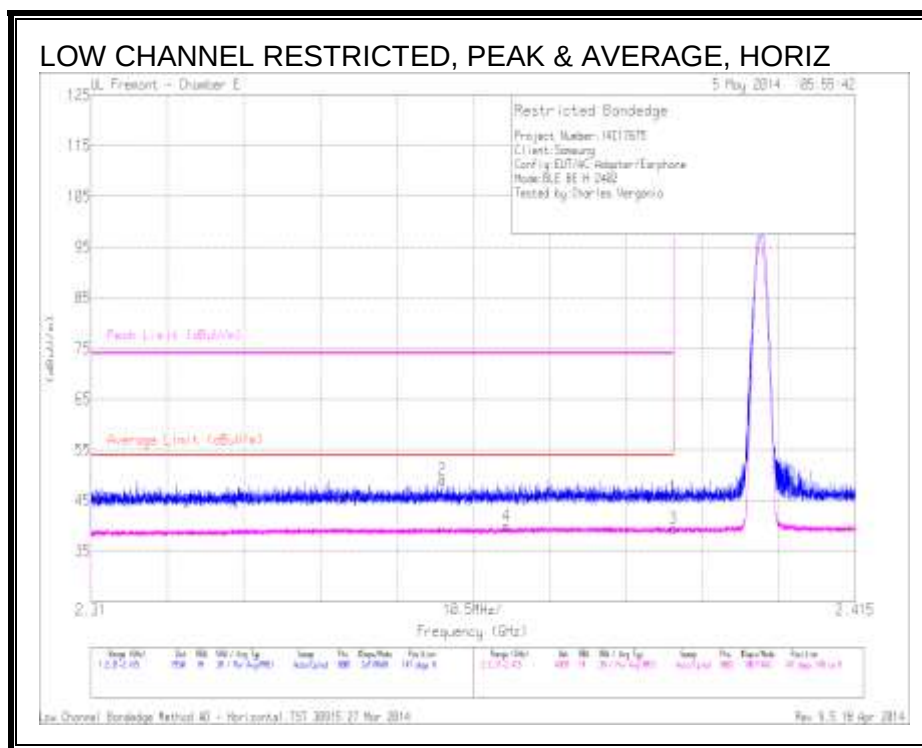


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.43	PK	32	-24.7	0	45.73	-	-	74	-28.27	147	140	H
2	* 2.358	42.17	PK	31.8	-24.8	0	49.17	-	-	74	-24.83	147	140	H
3	* 2.39	30.1	RMS	32	-24.7	2.1	39.5	54	-14.5	-	-	147	140	H
4	* 2.367	30.73	RMS	31.8	-24.7	2.1	39.93	54	-14.07	-	-	147	140	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

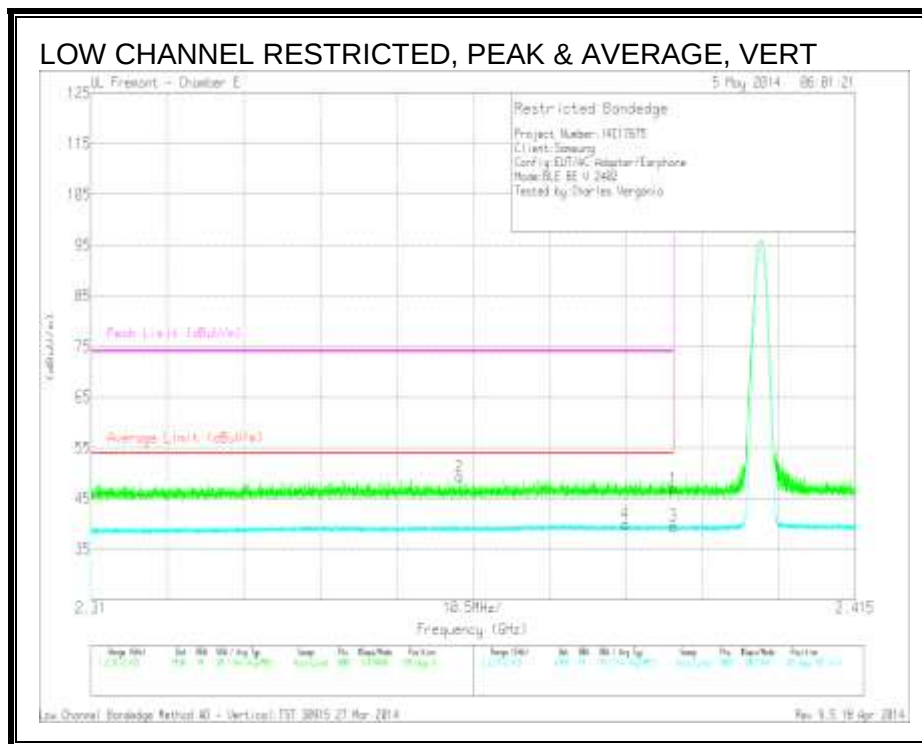


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Filt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.69	PK	32	-24.7	0	46.99	-	-	74	-27.01	199	101	V
2	* 2.361	42.26	PK	31.8	-24.8	0	49.26	-	-	74	-24.74	199	101	V
3	* 2.39	30.17	RMS	32	-24.7	2.1	39.57	54	-14.43	-	-	199	101	V
4	* 2.383	30.63	RMS	31.9	-24.6	2.1	40.03	54	-13.97	-	-	199	101	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

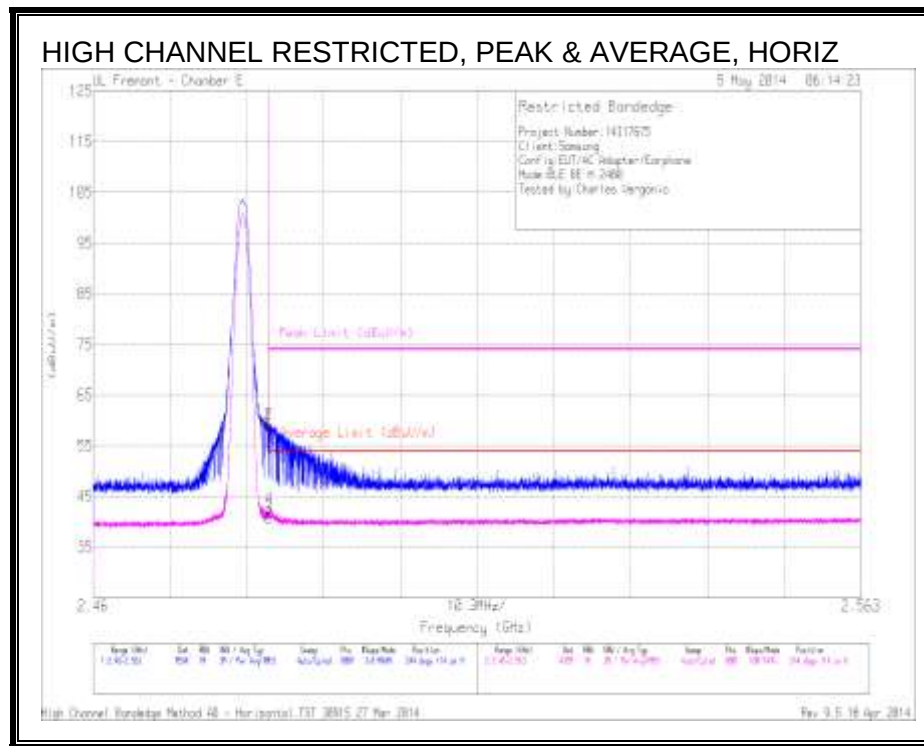RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.97	PK	32.3	-24.3	0	58.97	-	-	74	-15.03	244	114	H
2	* 2.484	51.27	PK	32.3	-24.3	0	59.27	-	-	74	-14.73	244	114	H
3	* 2.484	30.8	RMS	32.3	-24.3	2.1	40.9	54	-13.1	-	-	244	114	H
4	* 2.484	32.61	RMS	32.3	-24.3	2.1	42.71	54	-11.29	-	-	244	114	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

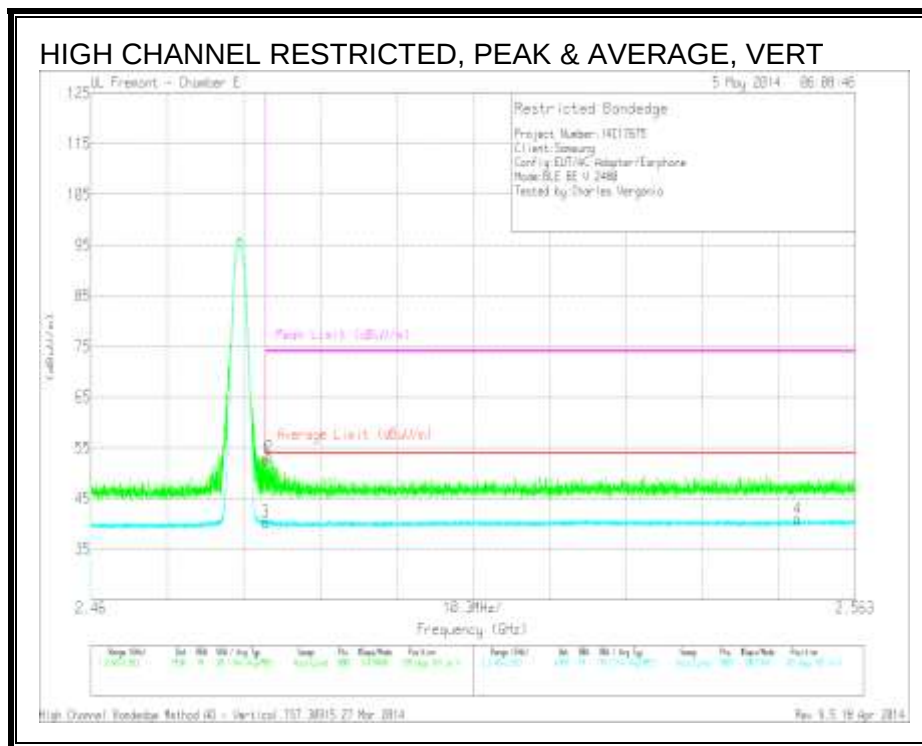


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	44.73	PK	32.3	-24.3	0	52.73	-	-	74	-21.27	199	101	V
2	* 2.484	45.23	PK	32.3	-24.3	0	53.23	-	-	74	-20.77	199	101	V
3	* 2.484	30.2	RMS	32.3	-24.3	2.1	40.3	54	-13.7	-	-	199	101	V
4	2.555	30.48	RMS	32.5	-24.1	2.1	40.98	54	-13.02	-	-	199	101	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

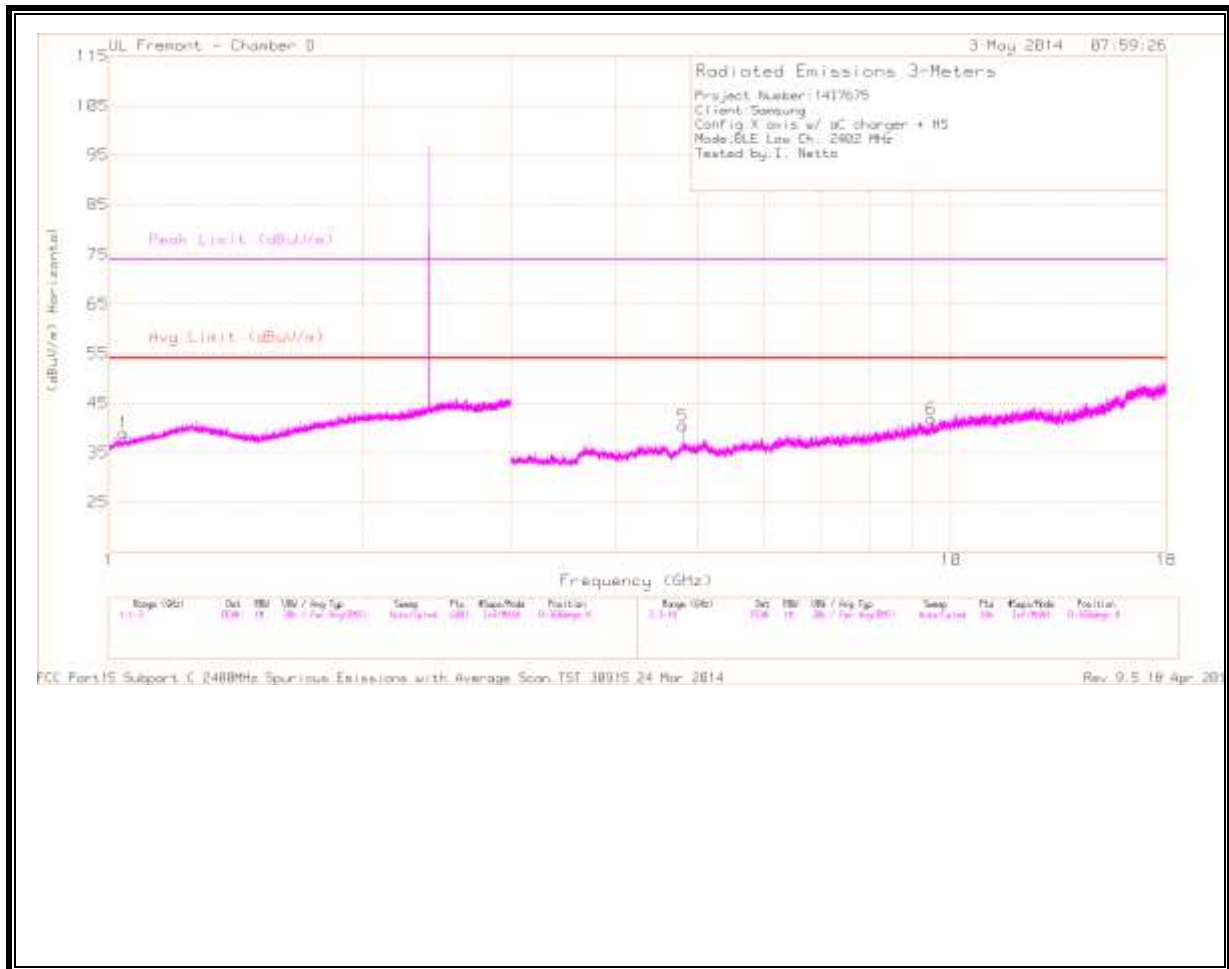HARMONICS AND SPURIOUS EMISSIONS**LOW CHANNEL
HORIZONTAL**

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

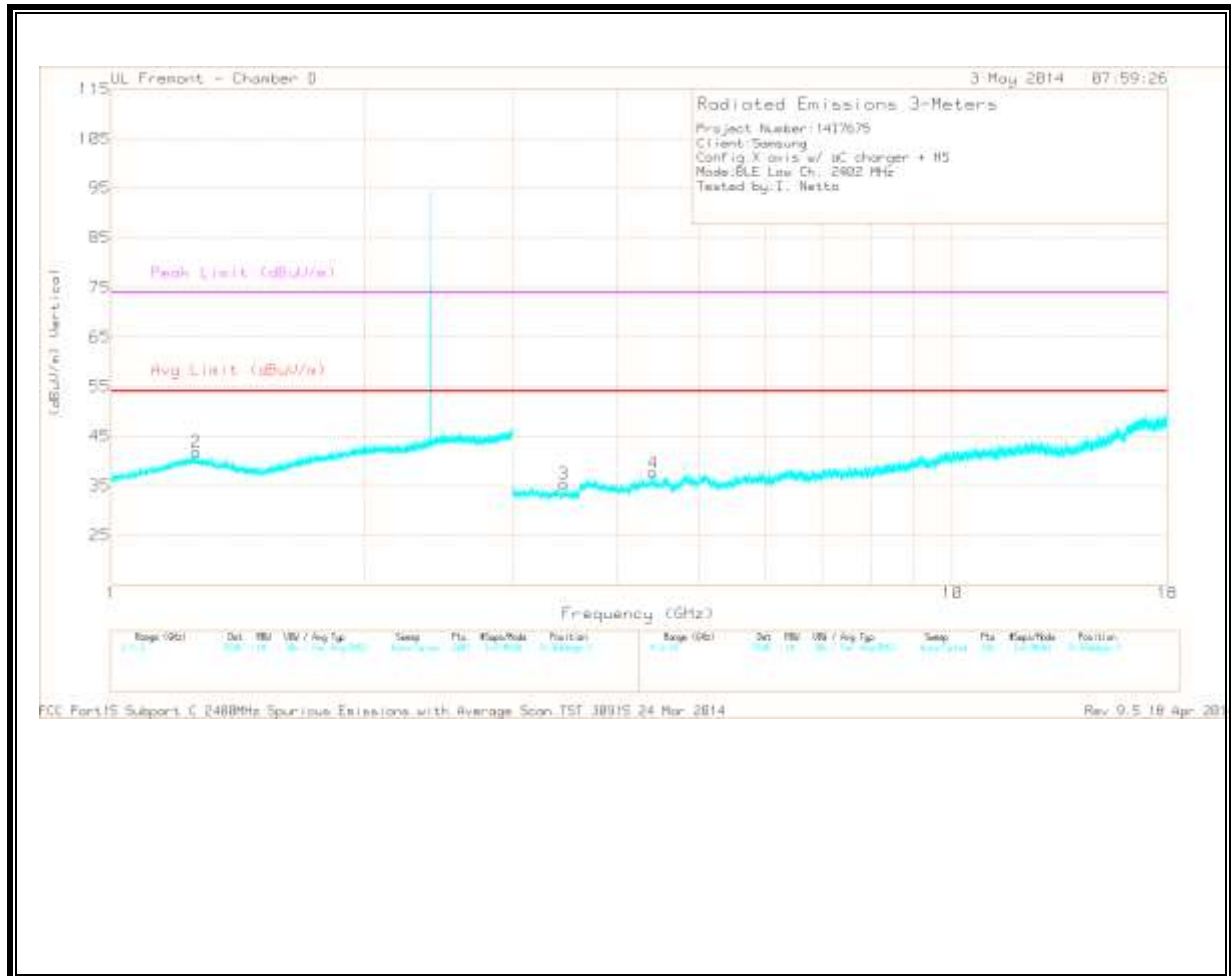

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.041	34.58	PK	26.7	-22.4	0	38.88	-	-	74	-35.12	0-360	100	H
2	* 1.262	34.29	PK	29.5	-22	0	41.79	-	-	74	-32.21	0-360	100	V
5	* 4.805	33.95	PK	33.5	-27.1	0	40.35	-	-	74	-33.65	0-360	201	H
6	* 9.479	27.19	PK	36.2	-21.6	0	41.79	-	-	74	-32.21	0-360	201	H
3	3.453	31.12	PK	32.3	-28.1	0	35.32	-	-	-	-	0-360	100	V
4	4.408	32.56	PK	33.3	-28.2	0	37.66	-	-	-	-	0-360	100	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.039	41.95	PK2	26.7	-22.4	0	46.25	-	-	74	-27.75	0	100	H
* 1.26	41.76	PK2	29.5	-22	0	49.26	-	-	74	-24.74	0	100	V
* 9.479	34.5	PK2	36.2	-21.6	0	49.1	-	-	74	-24.9	0	100	H
* 4.803	43.7	PK2	33.5	-27.1	0	50.1	-	-	74	-23.9	327	353	H
* 4.804	34.65	MAV1	33.5	-27.1	2.1	43.15	54	-10.85	-	-	327	353	H
3.452	38.41	PK2	32.3	-28.1	0	42.61	-	-	-	-	0	100	V
4.406	38.95	PK2	33.3	-28.2	0	44.05	-	-	-	-	0	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

HORIZONTAL

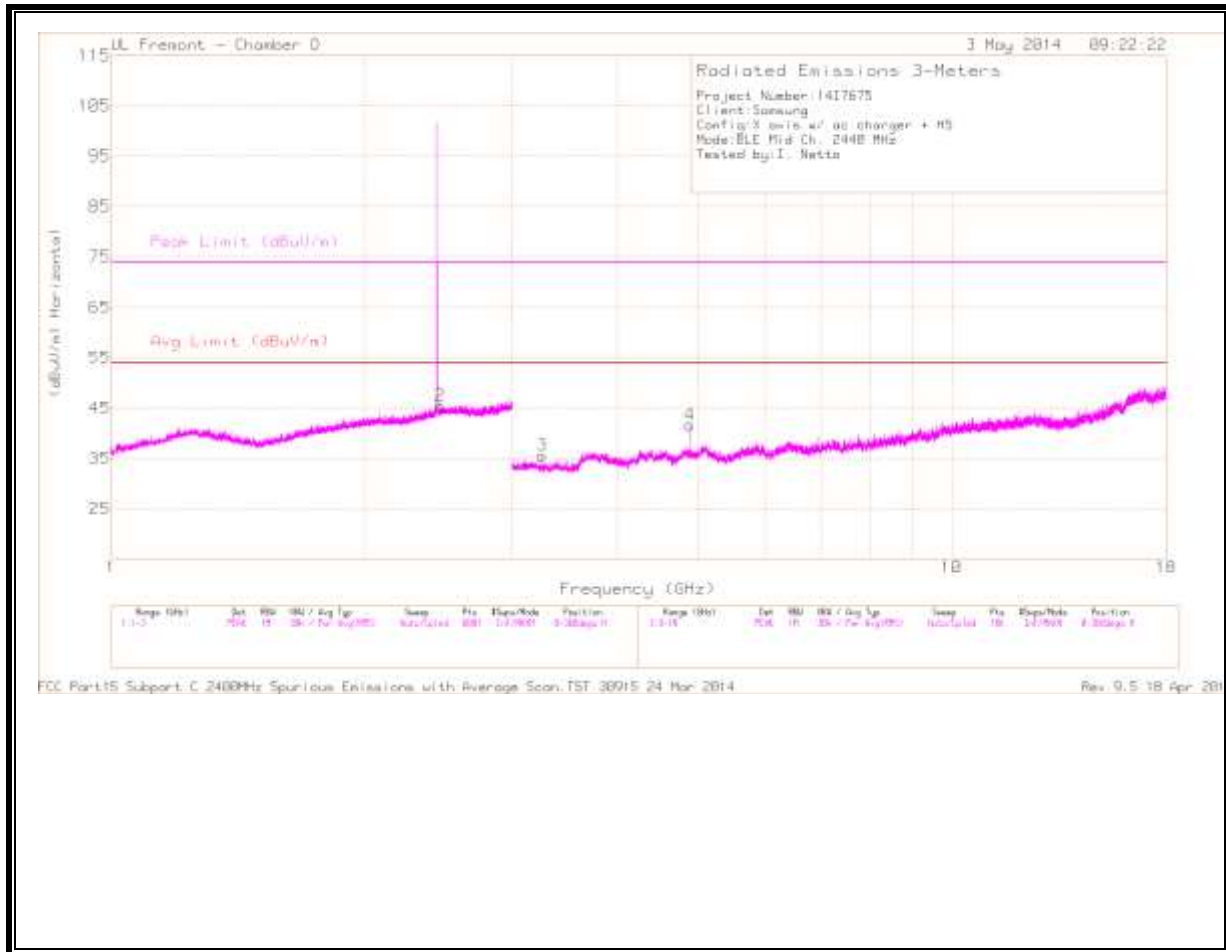

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.456	34.26	PK	27.4	-21.7	0	39.96	-	-	74	-34.04	0-360	200	V
4	* 4.88	35.17	PK	33.5	-27	0	41.67	-	-	74	-32.33	0-360	100	H
5	* 7.319	30.97	PK	35.1	-25	0	41.07	-	-	74	-32.93	0-360	201	V
6	* 7.635	29.59	PK	35.1	-24.8	0	39.89	-	-	74	-34.11	0-360	100	V
2	2.464	34.03	PK	32	-20.6	0	45.43	-	-	-	-	0-360	353	H
3	3.259	32.09	PK	32.5	-29	0	35.59	-	-	-	-	0-360	100	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.454	41.61	PK2	27.4	-21.7	0	47.31	-	-	74	-26.69	360	100	V
* 4.88	41.93	PK2	33.5	-27	0	48.43	-	-	74	-25.57	312	379	H
* 4.88	32.93	MAV1	33.5	-27	2.1	41.53	54	-12.47	-	-	312	379	H
* 7.637	36.2	PK2	35.1	-24.9	0	46.4	-	-	74	-27.6	360	100	V
* 7.321	37.24	PK2	35.1	-25	0	47.34	-	-	74	-26.66	193	203	V
* 7.32	25.57	MAV1	35.1	-25	2.1	37.77	54	-16.23	-	-	193	203	V
2.464	41.06	PK2	32	-20.6	0	52.46	-	-	-	-	360	100	H
3.259	39.37	PK2	32.5	-29	0	42.87	-	-	-	-	360	100	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

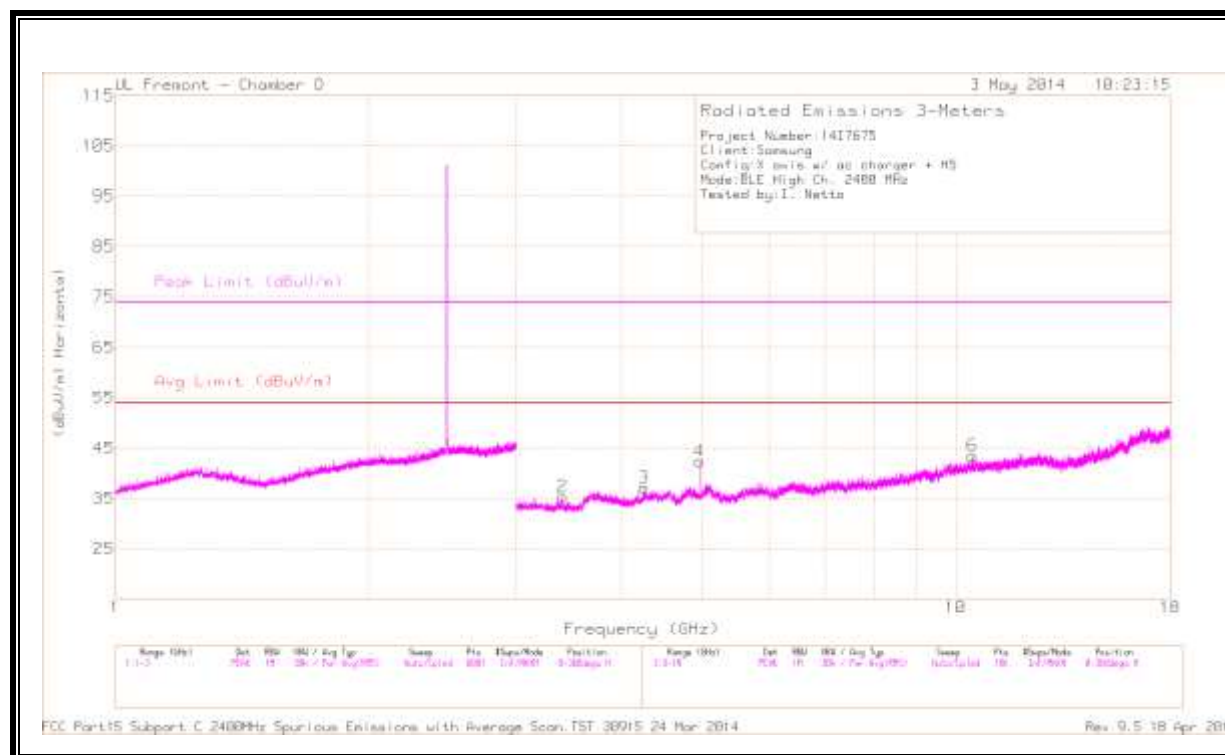

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

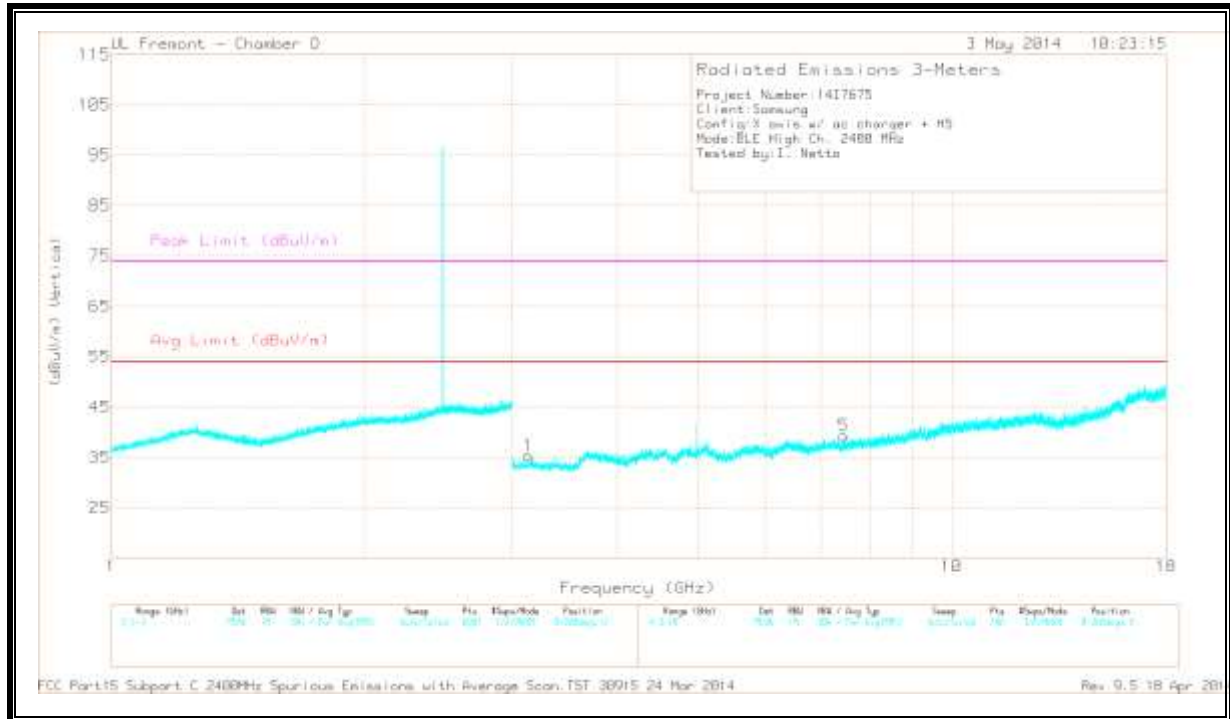

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.262	32.15	PK	32.9	-27.9	0	37.15	-	-	74	-36.85	0-360	100	H
4	* 4.96	37	PK	33.5	-28.1	0	42.4	-	-	74	-31.6	0-360	100	H
5	* 7.439	28.94	PK	35.2	-24.8	0	39.34	-	-	74	-34.66	0-360	201	V
1	3.136	31.01	PK	32.5	-28.2	0	35.31	-	-	-	-	0-360	100	V
2	3.407	30.93	PK	32.4	-28	0	35.33	-	-	-	-	0-360	100	H
6	10.473	27.87	PK	37.2	-21.6	0	43.47	-	-	-	-	0-360	100	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cb/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.265	37.89	PK2	32.9	-27.9	0	42.89	-	-	74	-31.11	360	100	H
* 4.96	43.8	PK2	33.5	-28.1	0	49.2	-	-	74	-24.8	250	267	H
* 4.96	34.39	MAV1	33.5	-28.1	2.1	41.89	54	-12.11	-	-	250	267	H
* 7.437	36.13	PK2	35.2	-24.8	0	46.53	-	-	74	-27.47	360	100	V
3.138	38.55	PK2	32.5	-28.2	0	42.85	-	-	-	-	360	100	V
3.406	38.63	PK2	32.4	-28	0	43.03	-	-	-	-	360	100	H
10.472	34.2	PK2	37.2	-21.6	0	49.8	-	-	-	-	360	100	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

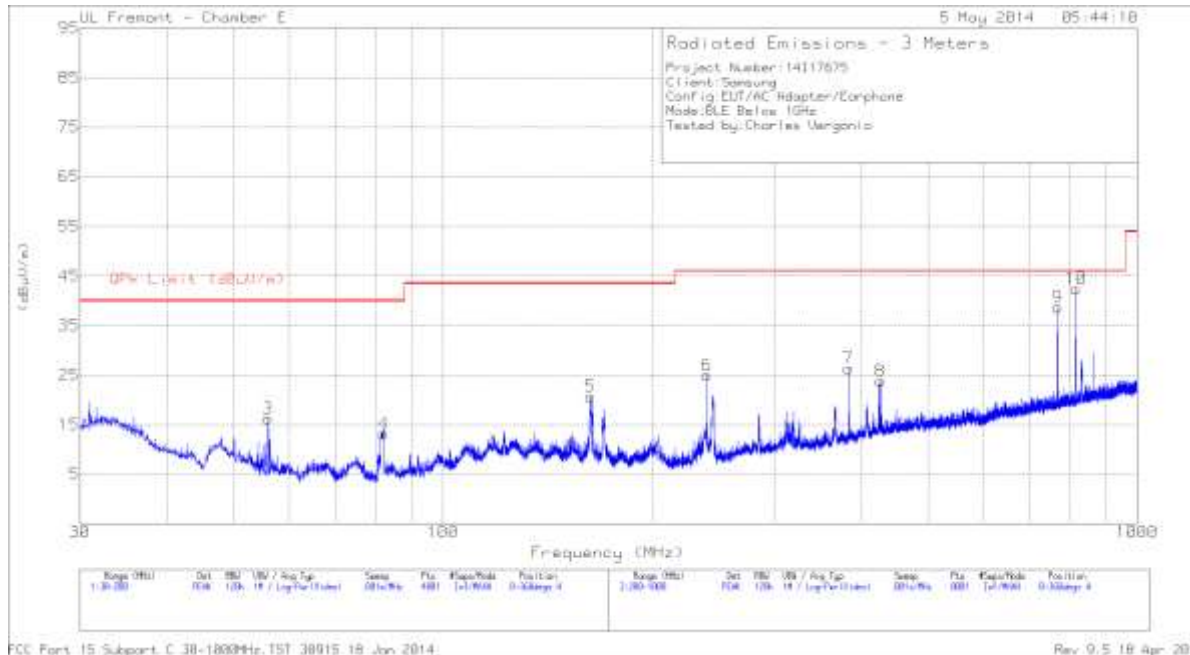WORST-CASE BELOW 1 GHz**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)****HORIZONTAL PLOT**

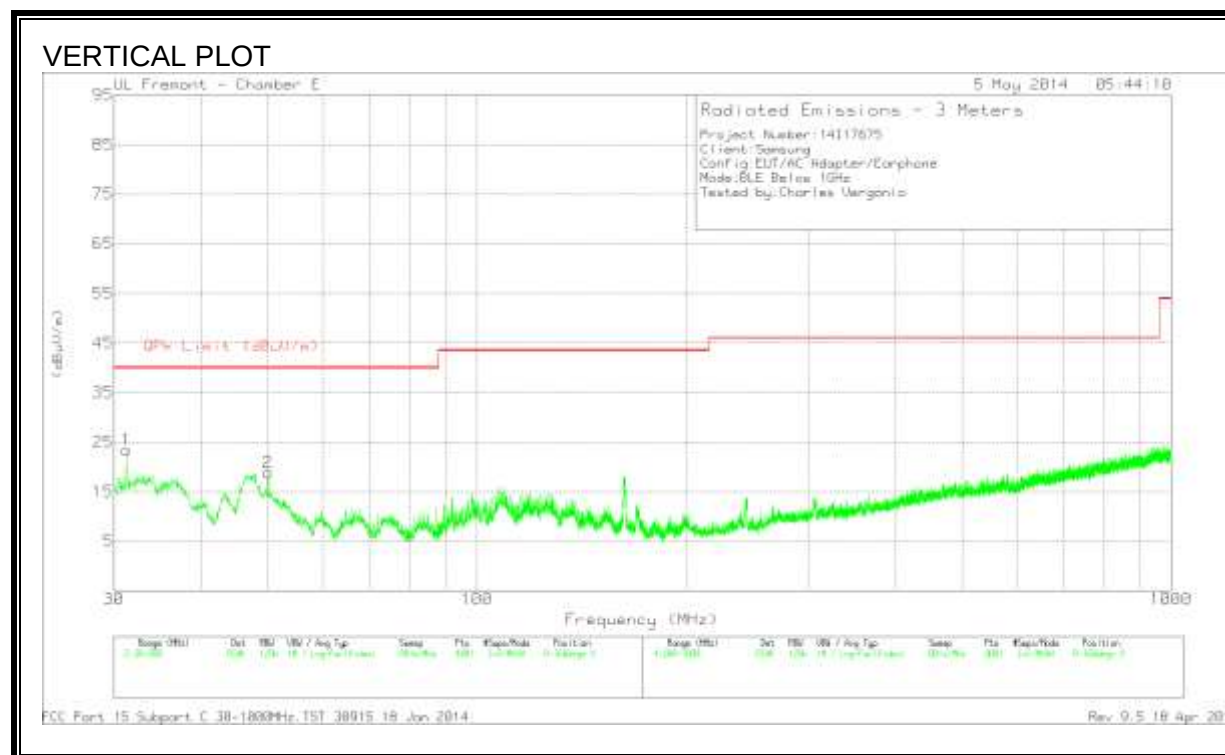

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Hybrid	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 163.3225	39.44	PK	12.1	-30.9	20.64	43.52	-22.88	0-360	98	H
6	* 240	43.92	PK	11.6	-30.6	24.92	46.02	-21.1	0-360	201	H
1	31.275	34.69	PK	20.5	-31.8	23.39	40	-16.61	0-360	100	V
2	50.0175	42.61	PK	7.9	-31.6	18.91	40	-21.09	0-360	100	V
3	56.01	40.78	PK	7.2	-31.8	16.18	40	-23.82	0-360	200	H
4	82.105	37.14	PK	7.5	-31.5	13.14	40	-26.86	0-360	300	H
7	384	41.25	PK	15	-29.9	26.35	46.02	-19.67	0-360	100	H
8	426.4	37.47	PK	16.3	-29.9	23.87	46.02	-22.15	0-360	100	H
9	768	46.79	PK	20.8	-28.9	38.69	46.02	-7.33	0-360	201	H
10	816	49.72	PK	21.4	-28.7	42.42	46.02	-3.6	0-360	201	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

ANSI C63.4 - 2009

RESULTS

6 WORST EMISSIONS

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.204	42.29	PK	.9	0	43.19	63.4	-20.21	-	-
2	.204	25.17	Av	.9	0	26.07	-	-	53.4	-27.33
3	.4065	38.71	PK	.4	0	39.11	57.7	-18.59	-	-
4	.4065	22.73	Av	.4	0	23.13	-	-	47.7	-24.57
5	.5055	40.08	PK	.3	0	40.38	56	-15.62	-	-
6	.5055	22.5	Av	.3	0	22.8	-	-	46	-23.2
7	1.644	52.89	PK	.2	.1	53.19	56	-2.81	-	-
8	1.644	36.56	Av	.2	.1	36.86	-	-	46	-9.14
9	1.689	52.4	PK	.2	.1	52.7	56	-3.3	-	-
10	1.689	36.58	Av	.2	.1	36.88	-	-	46	-9.12
11	4.047	55.37	PK	.2	.1	55.67	56	-.33	-	-
12	4.047	37.11	Av	.2	.1	37.41	-	-	46	-8.59
13	4.1235	55.81	PK	.2	.1	56.11	56	.11	-	-
14	4.1235	37.8	Av	.2	.1	38.1	-	-	46	-7.9

Quasi-Peak Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
.2022	36.67	QP	.9	0	37.57	63.5	-25.93	-	-
.402	33.45	QP	.4	0	33.85	57.8	-23.95	-	-
.5082	30.89	QP	.3	0	31.19	56	-24.81	-	-
1.6413	46.31	QP	.2	.1	46.61	56	-9.39	-	-
1.6908	45.78	QP	.2	.1	46.08	56	-9.92	-	-
4.0452	45.29	QP	.2	.1	45.59	56	-10.41	-	-
4.1235	46.05	QP	.2	.1	46.35	56	-9.65	-	-

Line-L2 .15 - 30MHz


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
15	.204	41.2	PK	1	0	42.2	63.4	-21.2	-	-
16	.204	23.82	Av	1	0	24.82	-	-	53.4	-28.58
17	.4245	42.12	PK	.4	0	42.52	57.4	-14.88	-	-
18	.4245	23.25	Av	.4	0	23.65	-	-	47.4	-23.75
19	.5055	43.29	PK	.4	0	43.69	56	-12.31	-	-
20	.5055	21.24	Av	.4	0	21.64	-	-	46	-24.36
21	1.59	55.45	PK	.2	.1	55.75	56	-.25	-	-
22	1.59	34.22	Av	.2	.1	34.52	-	-	46	-11.48
23	1.671	55.31	PK	.2	.1	55.61	56	-.39	-	-
24	1.671	34.4	Av	.2	.1	34.7	-	-	46	-11.3
27	4.056	54.32	PK	.2	.1	54.62	56	-1.38	-	-
28	4.056	35.72	Av	.2	.1	36.02	-	-	46	-9.98
25	4.1235	55.41	PK	.2	.1	55.71	56	-.29	-	-
26	4.1235	36.35	Av	.2	.1	36.65	-	-	46	-9.35

Quasi-Peak Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
.2013	35.43	QP	1	0	36.43	63.6	-27.17	-	-
.4218	33.29	QP	.4	0	33.69	57.4	-23.71	-	-
.5019	31.72	QP	.4	0	32.12	56	-23.88	-	-
1.59	43.41	QP	.2	.1	43.71	56	-12.29	-	-
1.6683	42.92	QP	.2	.1	43.22	56	-12.78	-	-
4.0578	43.83	QP	.2	.1	44.13	56	-11.87	-	-
4.1208	44.03	QP	.2	.1	44.33	56	-11.67	-	-

LINE 1 RESULTS

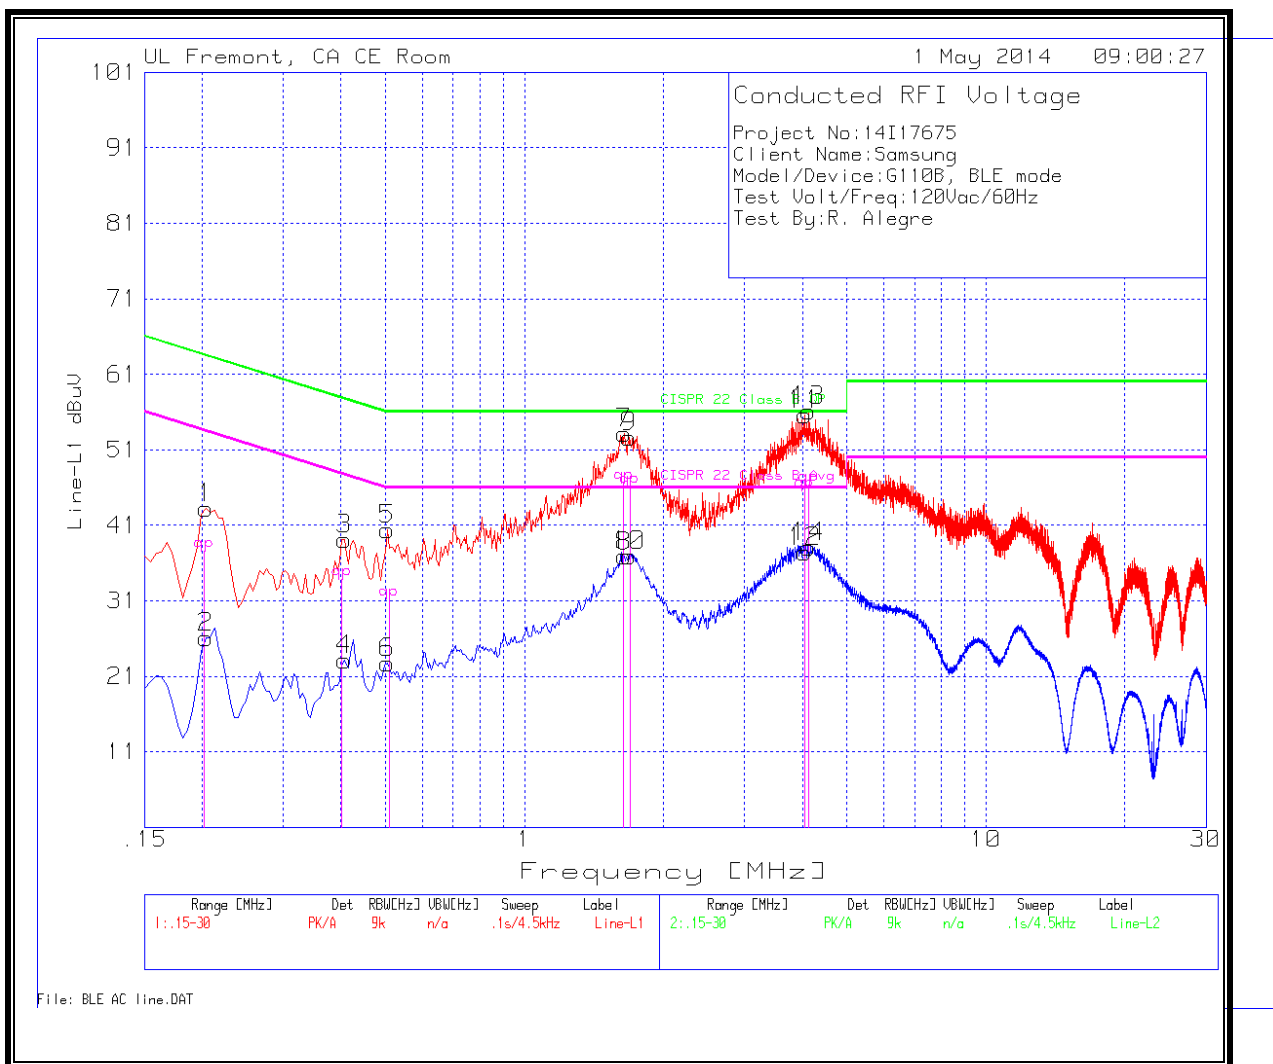

LINE 2 RESULTS

