



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n & NFC

**Model: SM-G530M
FCC ID: A3LSMG530M**

**Report Number: 14I18800-S1
Issue Date: 9/16/2014**

Prepared for
**SAMSUNG ELECTRONICS CO. LTD.
416 MAETAN 3-DONG, WEONGTONG-GU
SUWON CITY, GYEONGGI-DO, SOUTH KOREA, 443-742**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
--	09/16/2014	Initial Issue	--

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation	6
4.	SAR Measurement System & Test Equipment	7
4.1.	SAR Measurement System.....	7
4.2.	SAR Scan Procedure.....	8
4.3.	Test Equipment.....	10
5.	Measurement Uncertainty.....	11
6.	Device Under Test (DUT) Information	12
6.1.	DUT Description	12
6.2.	Wireless Technologies.....	13
6.3.	Nominal and Maximum Output Power.....	14
6.4.	Simultaneous Transmission Condition	15
6.5.	General LTE SAR Test and Reporting Considerations.....	16
7.	RF Exposure Conditions (Test Configurations)	17
7.1.	Head.....	17
7.2.	Body-worn Accessory.....	17
7.3.	Wireless Router (Hotspot).....	17
8.	Conducted Output Power Measurements.....	18
8.1.	GSM850 and GSM1900.....	18
8.2.	W-CDMA Bands V and II	20
8.3.	LTE Bands 2 and 5.....	26
8.4.	Wi-Fi (2.4 GHz Band).....	31
8.5.	Bluetooth	31
9.	Dielectric Property Measurements.....	32
9.1.	Tissue Dielectric Parameters	32
9.2.	Dielectric Property Measurements Results	33
10.	System Check.....	35
10.1.	Reference Target SAR Values	35
10.2.	System Check Results	36
11.	Measured and Reported (Scaled) SAR Results.....	37
11.1.	GSM850.....	38
11.2.	GSM1900.....	38

11.3.	W-CDMA Band V	38
11.4.	W-CDMA Band II.....	39
11.5.	LTE Band 2 (20MHz Bandwidth)	39
11.6.	LTE Band 5 (10MHz Bandwidth)	40
11.7.	Wi-Fi (DTS Band).....	40
11.8.	Bluetooth.....	41
11.8.1.	Standalone SAR Test Exclusion Considerations	41
11.8.2.	Estimated SAR.....	41
12.	SAR Measurement Variability.....	42
12.1.	The Highest Measured SAR Configuration in Each Frequency Band	42
12.2.	Repeated Measurement Results	42
13.	Simultaneous Transmission SAR Analysis.....	43
13.1.	Sum of the SAR for GSM850 & Wi-Fi & BT	43
13.2.	Sum of the SAR for GSM1900 & Wi-Fi & BT	43
13.3.	Sum of the SAR for WCDMA Band V & Wi-Fi & BT.....	43
13.4.	Sum of the SAR for WCDMA Band II & Wi-Fi & BT	44
13.5.	Sum of the SAR for LTE Band 2 & Wi-Fi & BT	44
13.6.	Sum of the SAR for LTE Band 5 & Wi-Fi & BT	44
14.	Appendixes.....	45
14.1.	Photos and Antenna Locations.....	45
14.2.	System Performance Check Plots.....	45
14.3.	Highest SAR Test Plots.....	45
14.4.	Calibration Certificate for E-Field Probe EX3DV4 - SN 3531	45
14.5.	Calibration Certificate for E-Field Probe EX3DV4 - SN 3773.....	45
14.6.	Calibration Certificate for D835V2 - SN 4d002	45
14.7.	Calibration Certificate for D1900V2- SN 5d043	45
14.8.	Calibration Certificate for D2450V2 - SN 706	45

1. Attestation of Test Results

Applicant Name	SAMSUNG ELECTRONICS CO. LTD.		
Application Purpose	☒ Original Grant ☐ Class II Permissive Change		
FCC ID	A3LSMG530M		
DUT Description	GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n & NFC		
Exposure Category	General Population/Uncontrolled Exposure (1g SAR limit: 1.6 W/kg)		
The Highest Reported SAR	RF Exposure Conditions	Equipment Class	
		Licensed	DTS
	Head	0.402 W/kg	0.238 W/kg
	Body-worn Accessory	1.017 W/kg	0.310 W/kg
	Wireless Router (Hotspot)		
	Wi-Fi Direct	N/A	
	Simultaneous Transmission	Head: 0.528 W/kg Body: 1.095 W/kg	
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013		
Test Results	Pass		
Date tested	09/10/2014 – 09/16/2014		
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.			
Approved & Released By:  Dave Weaver Program Manager UL Verification Services Inc.		Prepared By:  AJ Newcomer Laboratory Technician UL Verification Services Inc.	

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2003 & 2013, the following FCC Published RF exposure KDB procedures, and TCB workshop updates:

- 447498 D01 General RF Exposure Guidance v05r02
- 648474 D04 Handset SAR v01r02
- 941225 D01 SAR test for 3G devices v02
- 941225 D02 HSPA and 1x Advanced v02r02
- 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- 941225 D04 SAR for GSM E GPRS Dual Xfer Mode v01
- 941225 D05 SAR for LTE Devices v02r03
- 941225 D06 Hotspot Mode SAR v01r01
- 248227 D01 SAR Meas for 802 11abg v01r02
- 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- 865664 D02 SAR Reporting v01r01
- 690783 D01 SAR Listings on Grants v01r03

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

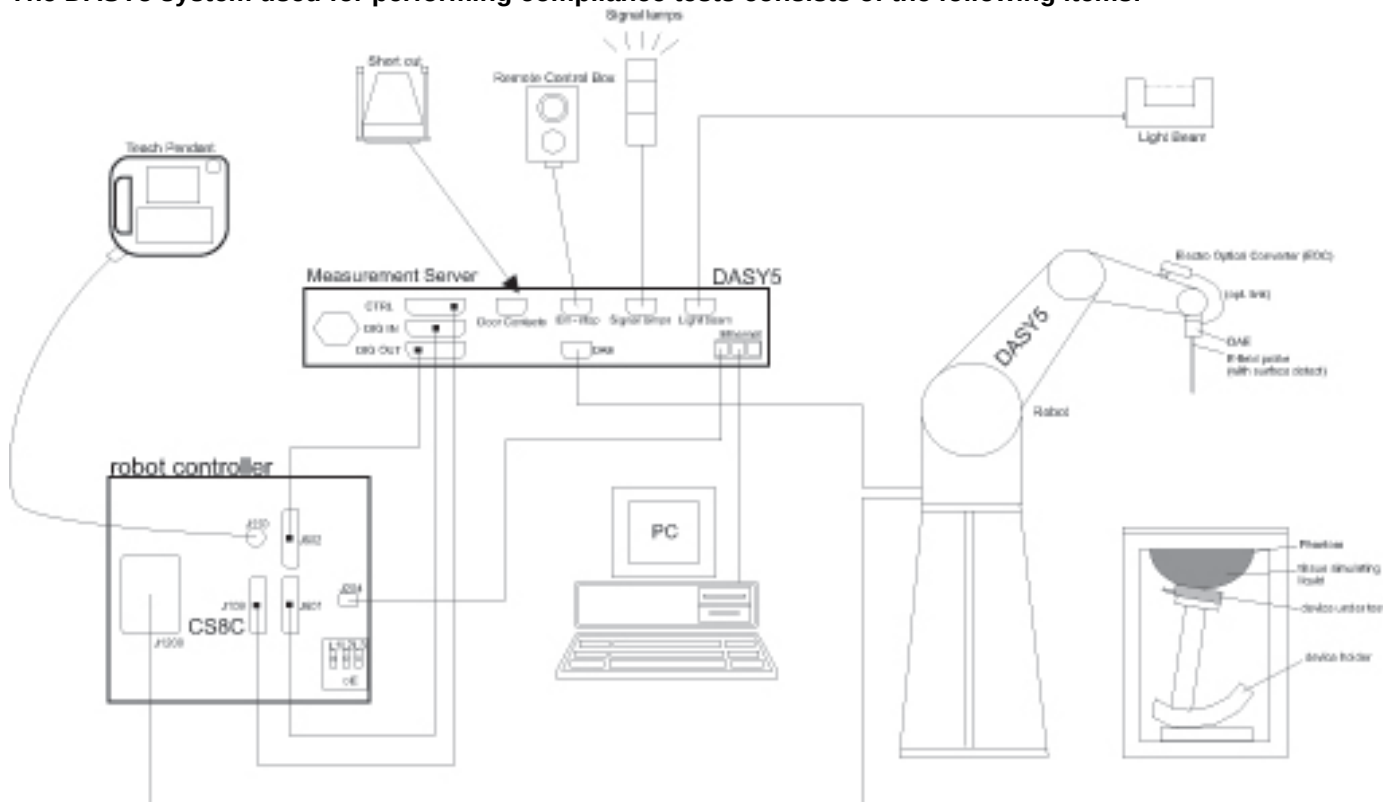

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			$\leq 3\text{ GHz}$	$> 3\text{ GHz}$
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2\text{ GHz: } \leq 8\text{ mm}$ $2 - 3\text{ GHz: } \leq 5\text{ mm}^*$	$3 - 4\text{ GHz: } \leq 5\text{ mm}^*$ $4 - 6\text{ GHz: } \leq 4\text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5\text{ mm}$	$3 - 4\text{ GHz: } \leq 4\text{ mm}$ $4 - 5\text{ GHz: } \leq 3\text{ mm}$ $5 - 6\text{ GHz: } \leq 2\text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4\text{ mm}$	$3 - 4\text{ GHz: } \leq 3\text{ mm}$ $4 - 5\text{ GHz: } \leq 2.5\text{ mm}$ $5 - 6\text{ GHz: } \leq 2\text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30\text{ mm}$	$3 - 4\text{ GHz: } \geq 28\text{ mm}$ $4 - 5\text{ GHz: } \geq 25\text{ mm}$ $5 - 6\text{ GHz: } \geq 22\text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4\text{ W/kg}$, $\leq 8\text{ mm}$, $\leq 7\text{ mm}$ and $\leq 5\text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	ENA Series/E5071B	MY42100131	2/24/2015
Dielectronic Probe kit	SPEAG	DAK-3.5	1087	11/13/2014
Dielectronic Probe kit	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	4242	122529163	9/19/2014
Thermometer	EXTECH	445703	CCS-200	3/24/2015

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
HP Signal Generator	HP	8665B	3546A00784	6/23/2015
Power Meter	HP	437B	3125U16345	6/16/2015
Power Meter	HP	437B	3125U09516	9/30/2014
Power Sensor	Agilent	8481A	2702A60780	6/16/2015
Power Sensor	Agilent	8481A	3318A95392	9/30/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1622052	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2711	N/A
DC Power Supply	Sorensen Ametek	XT20-3	1318A00530	N/A
Synthesized Signal Generator	Agilent	8665B	3438A00633	8/29/2015
Power Meter	HP	438A	2822A05684	10/10/2104
Power Sensor	Agilent	8481A	2349A36506	9/30/2014
Power Sensor	Agilent	8481A	2237A31744	10/2/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1808939	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2710	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A
E-Field Probe (SAR 2)	SPEAG	EX3DV3	3531	11/21/2014
E-Field Probe (SAR 3)	SPEAG	EX3DV4	3773	4/22/2015
Data Acquisition Electronics (SAR 2)	SPEAG	DAE4	1359	2/17/2015
Data Acquisition Electronics (SAR 3)	SPEAG	DAE4	1380	7/23/2015
System Validation Dipole	SPEAG	D835V2	4d002	11/15/2014
System Validation Dipole	SPEAG	D1900V2	5d043	11/12/2014
System Validation Dipole	SPEAG	D2450V2	706	5/20/2105
Thermometer (SAR Lab 2)	EXTECH	445703	CCS-203	3/28/2015
Thermometer (SAR Lab 3)	EXTECH	445703	CCS-237	6/3/2015

Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Agilent	N1912A	MY53040015	7/10/2015
Power Sensor	Agilent	N1921A	MY52020011	5/6/2015
Base Station Simulator	R & S	CMW500	127733	6/2/2015

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2003 & 2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Model: SM-G530M	
Device Dimension	Overall (Length x Width): 144 mm x 72 mm Overall Diagonal: 155 mm Display Diagonal: 128 mm
Battery Back Cover	☒ Normal Battery Cover ☐ Normal Battery Cover with NFC ☐ Wireless Charger Battery Cover ☐ Wireless Charger Battery Cover with NFC.
Battery Options	☒ Standard – Lithium-ion battery, Rating 3.8Vdc, 9.88Wh ☐ Extended (large capacity)
Accessory	Headset
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☐ Mobile Hotspot (Wi-Fi 5 GHz)
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other ☒ Wi-Fi Direct (Wi-Fi 2.4 GHz) ☐ Wi-Fi Direct (Wi-Fi 5 GHz)
SIM Information	☒ Single SIM ☐ Dual SIM

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
GSM	850 /1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK)	GSM Voice: 12.5%; GPRS/EGPRS: 1 Slot: 12.5%; 2 Slots: 25%, 3 Slots: 37.5%, 4 Slots: 50%,
	GPRS Multi-Slot Class: ☐ Class 8 - One Up ☐ Class 10 - Two Up ☐ Class 12 - Four Up ☒ Class 33 - Four Up DTM (Dual Transfer Mode): Not supported		
W-CDMA (UMTS)	Band V / II	UMTS Rel. 99 (Voice & Data) HSDPA HSUPA DC-HSDPA	100%
LTE (FDD)	Band 2 / 5	QPSK, 16QAM	100%
	Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No		
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)	100%
Bluetooth	2.4 GHz	Version 4.0 LE	32.25% (DH1), 66.68% (DH3), 77.52% (DH5)

6.3. Nominal and Maximum Output Power

Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
GSM850	Voice	32.5	33.0
	GPRS 1 slot	32.5	33.0
	GPRS 2 slots	28.0	28.5
	GPRS 3 slots	26.5	27.0
	GPRS 4 slots	25.5	26.0
	EGPRS 1 slot	27.5	28.0
	EGPRS 2 slots	26.0	26.5
	EGPRS 3 slots	23.5	24.0
	EGPRS 4 slots	22.0	22.5
GSM1900	Voice	29.5	30.0
	GPRS 1 slot	29.5	30.0
	GPRS 2 slots	25.5	26.0
	GPRS 3 slots	23.5	24.0
	GPRS 4 slots	22.5	23.0
	EGPRS 1 slot	27.5	28.0
	EGPRS 2 slots	25.5	26.0
	EGPRS 3 slots	22.5	23.0
	EGPRS 4 slots	22.5	23.0
W-CDMA Band V	R99	22.5	23.0
	HSDPA	22.5	23.0
	HSUPA	22.0	22.5
	DC-DSPA	22.0	22.5
W-CDMA Band II	R99	22.5	23.0
	HSDPA	21.5	22.0
	HSUPA	22.0	22.5
	DC-DSPA	21.5	22.0
LTE Band 2	QPSK	22.5	23.0
LTE Band 5	QPSK	22.5	23.0

Upper limit (dB): 0.5		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
WiFi 2.4 GHz	802.11b	17.0	17.5
	802.11g	13.0	13.5
	802.11n HT20	11.0	11.5
Bluetooth		10.0	10.5
Bluetooth LE		1.0	1.5

6.4. Simultaneous Transmission Condition

RF Exposure Condition	Capable Transmit Configurations
Head	1. GSM 850/1900 Voice + Wi-Fi 2.4GHz 2. GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4GHz 3. WCDMA Band 2/5 + Wi-Fi 2.4GHz 4. LTE B2/5 + Wi-Fi 2.4GHz
Body-worn Accessory	1. GSM 850/1900 Voice + Wi-Fi 2.4GHz 2. GSM 850/1900 Voice + BT 3. GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4GHz 4. GSM 850/1900 (GPRS/EDGE) + BT 5. WCDMA Band 2/5 + Wi-Fi 2.4GHz 6. WCDMA Band 2/5 + BT 7. LTE B2/5 + Wi-Fi 2.4GHz 8. LTE B2/5 + BT
Wireless Router (Hotspot)	1. GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4GHz 2. WCDMA Band 2/5 + Wi-Fi 2.4GHz 3. LTE B2/5 + Wi-Fi 2.4GHz
Notes: 1. Wi-Fi supports Hotspot and Wi-Fi direct. 2. GPRS/EDGE, WCDMA and LTE support Hotspot. 3. VoIP is supported in LTE, WCDMA and GPRS. 4. Wi-Fi Radio cannot transmit simultaneously with Bluetooth Radio.	

6.5. General LTE SAR Test and Reporting Considerations

Item	Description																																																				
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz																																																			
		Channel Bandwidth																																																			
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																														
	Low	18700 /1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5																																																
	Mid	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880																																																
	High	19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5																																																
	Band 5	Frequency range: 824 - 849 MHz																																																			
		Channel Bandwidth																																																			
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																														
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7																																														
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5																																														
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3																																														
LTE transmitter and antenna implementation	LTE has one (1) TX/RX antenna and one (1) Diversity antenna Refer to Appendix 14.1. Photos and Antenna Locations.																																																				
Maximum power reduction (MPR)	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr></table> MPR Built-in by design A-MPR (additional MPR) was disabled during SAR testing							Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3								Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3																																																					
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																														
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																															
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																														
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																														
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																														
Power reduction	No																																																				
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																				

7. RF Exposure Conditions (Test Configurations)

Refer to “Photos and Antenna Locations” Appendix for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

7.1. Head

For WWAN, LTE and Wi-Fi

Test Configurations	SAR Required	Note
Left Touch	Yes	
Left Tilt (15°)	Yes	
Right Touch	Yes	
Right Tilt (15°)	Yes	

7.2. Body-worn Accessory

For WWAN and LTE

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

7.3. Wireless Router (Hotspot)

For WWAN and LTE

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	
Edge 1 (Top)	125 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR
Edge 2 (Right)	13 mm	Yes	
Edge 3 (Bottom)	2 mm	Yes	
Edge 4 (Left)	2 mm	Yes	

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	
Edge 1 (Top)	25 mm	Yes	
Edge 2 (Right)	65 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR
Edge 3 (Bottom)	105 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR
Edge 4 (Left)	2 mm	Yes	

8. Conducted Output Power Measurements

8.1. GSM850 and GSM1900

GSM850 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
850	GSM (Voice)	CS1	1	128	824.2	33.0	24.0
				190	836.6	33.0	24.0
				251	848.8	33.0	24.0
	GPRS (GMSK)	CS1	1	128	824.2	33.0	24.0
				190	836.6	33.0	24.0
				251	848.8	33.0	24.0
			2	128	824.2	28.2	22.2
				190	836.6	28.2	22.2
				251	848.8	28.3	22.3
			3	128	824.2	27.0	22.7
				190	836.6	27.0	22.7
				251	848.8	27.0	22.7
			4	128	824.2	25.5	22.5
				190	836.6	25.5	22.5
				251	848.8	25.4	22.4
	EGPRS (8PSK)	MCS5	1	128	824.2	26.6	17.6
				190	836.6	26.7	17.7
				251	848.8	26.6	17.6
			2	128	824.2	25.1	19.1
				190	836.6	25.2	19.2
				251	848.8	25.1	19.1
			3	128	824.2	22.1	17.8
				190	836.6	22.2	17.9
				251	848.8	22.2	17.9
			4	128	824.2	22.0	19.0
				190	836.6	22.1	19.1
				251	848.8	22.1	19.1

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 1 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

GSM1900 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
1900	GSM (Voice)	CS1	1	512	1850.2	29.8	20.8
				661	1880.0	29.4	20.4
				810	1909.8	29.7	20.7
	GPRS (GMSK)	CS1	1	512	1850.2	29.8	20.8
				661	1880.0	29.4	20.4
				810	1909.8	29.7	20.7
			2	512	1850.2	26.0	20.0
				661	1880.0	25.6	19.6
				810	1909.8	25.9	19.9
			3	512	1850.2	23.8	19.5
				661	1880.0	23.5	19.2
				810	1909.8	23.8	19.5
			4	512	1850.2	22.7	19.7
				661	1880.0	22.3	19.3
				810	1909.8	22.6	19.6
	EGPRS (8PSK)	MCS5	1	512	1850.2	26.5	17.5
				661	1880.0	26.2	17.2
				810	1909.8	26.4	17.4
			2	512	1850.2	25.0	19.0
				661	1880.0	24.6	18.6
				810	1909.8	24.9	18.9
			3	512	1850.2	22.0	17.7
				661	1880.0	21.7	17.4
				810	1909.8	22.0	17.7
			4	512	1850.2	22.0	19.0
				661	1880.0	21.6	18.6
				810	1909.8	21.9	18.9

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 1 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

8.2. W-CDMA Bands V and II

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Rel 99 (RMC, 12.2 kbps)	4132	826.4	22.8
		4183	836.6	22.8
		4233	846.6	22.7
W-CDMA Band II	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	22.6
		9400	1880.0	22.4
		9538	1907.6	22.5

HSDPA

The following 4 Sub-tests were completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	21.6
		4183	836.6	0	21.5
		4233	846.6	0	21.6
	Subtest 2	4132	826.4	0	21.5
		4183	836.6	0	21.5
		4233	846.6	0	21.6
	Subtest 3	4132	826.4	0.5	21.1
		4183	836.6	0.5	21.2
		4233	846.6	0.5	21.0
	Subtest 4	4132	826.4	0.5	21.1
		4183	836.6	0.5	21.1
		4233	846.6	0.5	21.1
W-CDMA Band II	Subtest 1	9262	1852.4	0	21.6
		9400	1880.0	0	21.3
		9538	1907.6	0	21.7
	Subtest 2	9262	1852.4	0	21.6
		9400	1880.0	0	21.4
		9538	1907.6	0	21.6
	Subtest 3	9262	1852.4	0.5	21.2
		9400	1880.0	0.5	20.9
		9538	1907.6	0.5	21.0
	Subtest 4	9262	1852.4	0.5	21.2
		9400	1880.0	0.5	20.9
		9538	1907.6	0.5	21.0

Maximum output power levels that are possible for all subtests reported.

HSPA (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	11/15	15/9	2/15	15/0
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15 47/15	56/75	47/15
HSDPA Specific Settings	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
HSUPA Specific Settings	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	E-DPDCCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelisation Codes	2xSF2				SF4

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	21.7
		4183	836.6	0	21.6
		4233	846.6	0	21.4
	Subtest 2	4132	826.4	2	20.3
		4183	836.6	2	20.1
		4233	846.6	2	20.5
	Subtest 3	4132	826.4	1	20.3
		4183	836.6	1	20.3
		4233	846.6	1	20.3
	Subtest 4	4132	826.4	2	20.5
		4183	836.6	2	20.4
		4233	846.6	2	20.5
	Subtest 5	4132	826.4	0	21.7
		4183	836.6	0	21.7
		4233	846.6	0	21.7
W-CDMA Band II	Subtest 1	9262	1852.4	0	21.4
		9400	1880.0	0	21.2
		9538	1907.6	0	21.4
	Subtest 2	9262	1852.4	2	20.0
		9400	1880.0	2	19.8
		9538	1907.6	2	20.4
	Subtest 3	9262	1852.4	1	20.5
		9400	1880.0	1	20.1
		9538	1907.6	1	20.4
	Subtest 4	9262	1852.4	2	20.5
		9400	1880.0	2	20.1
		9538	1907.6	2	20.5
	Subtest 5	9262	1852.4	0	21.6
		9400	1880.0	0	21.4
		9538	1907.6	0	21.6

DC-HSDPA

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

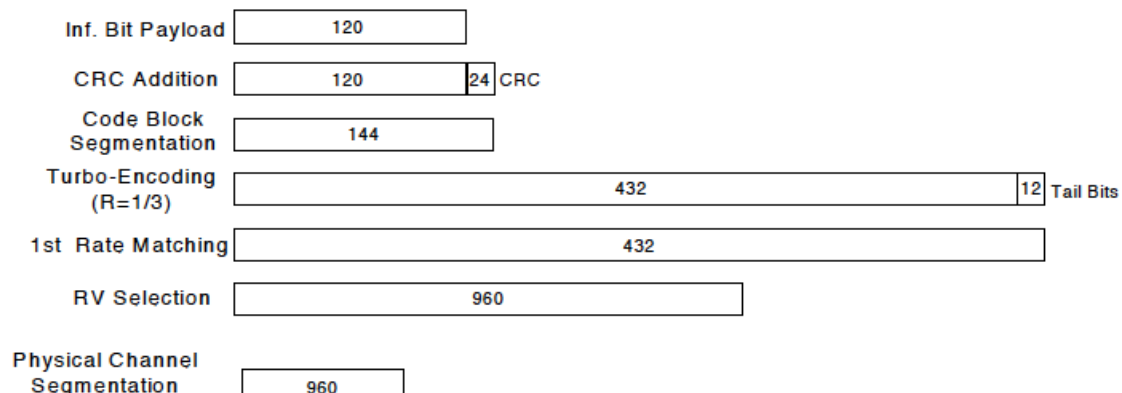


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
HSDPA Specific Settings	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

Up commands are set continuously to set the UE to Max power.

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	21.6
		4183	836.6	0	21.5
		4233	846.6	0	21.6
	Subtest 2	4132	826.4	0	21.5
		4183	836.6	0	21.5
		4233	846.6	0	21.6
	Subtest 3	4132	826.4	0.5	21.1
		4183	836.6	0.5	21.2
		4233	846.6	0.5	21.0
	Subtest 4	4132	826.4	0.5	21.1
		4183	836.6	0.5	21.1
		4233	846.6	0.5	21.1
W-CDMA Band II	Subtest 1	9262	1852.4	0	21.6
		9400	1880.0	0	21.3
		9538	1907.6	0	21.7
	Subtest 2	9262	1852.4	0	21.6
		9400	1880.0	0	21.4
		9538	1907.6	0	21.6
	Subtest 3	9262	1852.4	0.5	21.2
		9400	1880.0	0.5	20.9
		9538	1907.6	0.5	21.0
	Subtest 4	9262	1852.4	0.5	21.2
		9400	1880.0	0.5	20.9
		9538	1907.6	0.5	21.0

8.3. LTE Bands 2 and 5

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 2 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1860 MHz	1880 MHz	1900 MHz
LTE Band 2	20	QPSK	1	0	0	0	22.8	22.7	22.7
			1	50	0	0	22.8	22.6	22.5
			1	99	0	0	22.7	22.6	22.6
			50	0	1	1	21.7	21.4	21.5
			50	25	1	1	21.6	21.4	21.5
			50	50	1	1	21.6	21.3	21.5
			100	0	1	1	21.6	21.4	21.5
		16QAM	1	0	1	1	21.9	21.8	21.8
			1	50	1	1	21.9	21.7	21.7
			1	99	1	1	21.8	21.7	21.8
			50	0	2	2	20.7	20.5	20.4
			50	25	2	2	20.6	20.5	20.4
			50	50	2	2	20.6	20.4	20.5
			100	0	2	2	20.7	20.5	20.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1857.5 MHz	1880 MHz	1902.5 MHz
LTE Band 2	15	QPSK	1	0	0	0	22.8	22.6	22.6
			1	36	0	0	22.6	22.5	22.5
			1	74	0	0	22.6	22.6	22.6
			36	0	1	1	21.7	21.4	21.5
			36	18	1	1	21.6	21.4	21.5
			36	37	1	1	21.6	21.4	21.5
			75	0	1	1	21.6	21.4	21.5
		16QAM	1	0	1	1	21.5	21.8	21.6
			1	36	1	1	21.3	21.8	21.6
			1	74	1	1	21.3	21.8	21.6
			36	0	2	2	20.7	20.5	20.5
			36	18	2	2	20.6	20.5	20.5
			36	37	2	2	20.6	20.5	20.4
			75	0	2	2	20.7	20.5	20.5
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1855 MHz	1880 MHz	1905 MHz
LTE Band 2	10	QPSK	1	0	0	0	22.8	22.6	22.5
			1	25	0	0	22.7	22.6	22.6
			1	49	0	0	22.7	22.5	22.7
			25	0	1	1	21.8	21.5	21.5
			25	12	1	1	21.7	21.4	21.5
			25	25	1	1	21.7	21.5	21.6
			50	0	1	1	21.7	21.4	21.6
		16QAM	1	0	1	1	21.5	21.8	21.2
			1	25	1	1	21.4	21.8	21.2
			1	49	1	1	21.3	21.7	21.2
			25	0	2	2	20.8	20.5	20.6
			25	12	2	2	20.8	20.6	20.6
			25	25	2	2	20.7	20.6	20.7
			50	0	2	2	20.7	20.4	20.6

LTE Band 2 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1852.5 MHz	1880 MHz	1907.5 MHz
LTE Band 2	5	QPSK	1	0	0	0	22.9	22.7	22.6
			1	12	0	0	22.8	22.7	22.6
			1	24	0	0	22.7	22.6	22.7
			12	0	1	1	21.8	21.6	21.7
			12	6	1	1	21.8	21.5	21.7
			12	11	1	1	21.8	21.6	21.7
			25	0	1	1	21.7	21.5	21.6
		16QAM	1	0	1	1	21.4	21.7	22.0
			1	12	1	1	21.4	21.7	22.0
			1	24	1	1	21.3	21.5	21.9
			12	0	2	2	20.9	20.6	20.7
			12	6	2	2	20.8	20.6	20.7
			12	11	2	2	20.8	20.6	20.7
			25	0	2	2	20.9	20.5	20.6

LTE Band 5 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	0	22.0	22.1	22.2
			1	25	0	0	22.0	22.1	22.1
			1	49	0	0	22.0	22.1	22.2
			25	0	1	1	21.2	21.1	21.2
			25	12	1	1	21.1	21.1	21.1
			25	25	1	1	21.1	21.0	21.1
			50	0	1	1	21.1	21.0	21.0
		16QAM	1	0	1	1	21.0	21.3	21.0
			1	25	1	1	21.0	21.3	21.0
			1	49	1	1	21.0	21.4	21.0
			25	0	2	2	20.3	20.3	20.4
			25	12	2	2	20.2	20.3	20.3
			25	25	2	2	20.2	20.2	20.3
			50	0	2	2	20.2	20.2	20.2
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	0	22.1	22.2	22.2
			1	12	0	0	22.1	22.2	22.2
			1	24	0	0	22.1	22.2	22.3
			12	0	1	1	21.3	21.2	21.2
			12	6	1	1	21.2	21.2	21.2
			12	11	1	1	21.2	21.2	21.2
			25	0	1	1	21.1	21.1	21.2
		16QAM	1	0	1	1	21.0	21.4	21.5
			1	12	1	1	21.0	21.4	21.6
			1	24	1	1	21.0	21.4	21.6
			12	0	2	2	20.3	20.4	20.3
			12	6	2	2	20.2	20.4	20.3
			12	11	2	2	20.3	20.4	20.4
			25	0	2	2	20.3	20.3	20.2
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	0	22.1	22.3	22.2
			1	7	0	0	22.0	22.2	22.1
			1	14	0	0	22.0	22.1	22.2
			8	0	1	1	21.3	21.3	21.3
			8	4	1	1	21.3	21.2	21.3
			8	7	1	1	21.3	21.2	21.3
			15	0	1	1	21.2	21.2	21.3
		16QAM	1	0	1	1	21.0	21.4	21.0
			1	7	1	1	21.0	21.4	21.0
			1	14	1	1	21.0	21.4	21.0
			8	0	2	2	20.4	20.2	20.5
			8	4	2	2	20.4	20.2	20.6
			8	7	2	2	20.4	20.2	20.6
			15	0	2	2	20.3	20.4	20.3

LTE Band 5 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	0	22.2	22.2	22.3
			1	2	0	0	22.1	22.1	22.2
			1	5	0	0	22.1	22.1	22.3
			3	0	0	0	22.2	22.2	22.3
			3	1	0	0	22.2	22.2	22.3
			3	2	0	0	22.2	22.2	22.3
		16QAM	6	0	1	1	21.3	21.2	21.3
			1	0	1	1	21.0	21.4	21.1
			1	2	1	1	21.0	21.4	21.1
			1	5	1	1	21.0	21.4	21.2
			3	0	1	1	21.3	21.2	21.3
			3	1	1	1	21.2	21.2	21.3
			3	2	1	1	21.2	21.1	21.3
			6	0	2	2	20.4	20.2	20.5

8.4. Wi-Fi (2.4 GHz Band)

Required Test Channels per KDB 248227 D01

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	SAR Test (Yes/No)
2.4 (DTS)	802.11b	1 Mbps	1	2412	16.9	Yes
			6	2437	16.5	
			11	2462	16.9	
	802.11g	6 Mbps	1	2412	12.4	No
			6	2437	13.0	
			11	2462	13.0	
	802.11n (HT20)	MCS0	1	2412	10.4	No
			6	2437	11.0	
			11	2462	11.0	

Note(s):

- Per KDB 248227 D01, SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

Power measurements to determine worst-case data rates

Mode	Ch #	Freq. (MHz)	Data Rate	Avg Pwr (dBm)	SAR test (Yes/No)
802.11b	1	2412	1 Mbps	16.9	Yes
			2 Mbps	16.8	No
			5.5 Mbps	16.7	No
			11 Mbps	16.5	No

8.5. Bluetooth

Maximum tune-up tolerance limit is 10.50 dBm. This power level qualifies for exclusion of SAR testing.

9. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

9.1. Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

9.2. Dielectric Property Measurements Results

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

SAR Lab 2

	Freq. (MHz)		Liquid Parameters		Measured	Target	Delta (%)	Limit $\pm$ (%)
9/11/2014	Head 835	e'	42.8400	Relative Permittivity (ϵ_r):	42.84	41.50	3.23	5
		e''	20.2800	Conductivity (σ):	0.94	0.90	4.62	5
	Head 820	e'	43.0000	Relative Permittivity (ϵ_r):	43.00	41.60	3.36	5
		e''	20.3000	Conductivity (σ):	0.93	0.90	3.02	5
	Head 850	e'	42.6600	Relative Permittivity (ϵ_r):	42.66	41.50	2.80	5
		e''	20.2300	Conductivity (σ):	0.96	0.92	4.49	5
9/11/2014	Body 835	e'	53.5400	Relative Permittivity (ϵ_r):	53.54	55.20	-3.01	5
		e''	21.8700	Conductivity (σ):	1.02	0.97	4.68	5
	Body 820	e'	53.6900	Relative Permittivity (ϵ_r):	53.69	55.28	-2.87	5
		e''	21.9500	Conductivity (σ):	1.00	0.97	3.34	5
	Body 850	e'	53.3700	Relative Permittivity (ϵ_r):	53.37	55.16	-3.24	5
		e''	21.7800	Conductivity (σ):	1.03	0.99	4.28	5
9/15/2014	Head 2450	e'	39.6700	Relative Permittivity (ϵ_r):	39.67	39.20	1.20	5
		e''	13.7600	Conductivity (σ):	1.87	1.80	4.14	5
	Head 2410	e'	39.7200	Relative Permittivity (ϵ_r):	39.72	39.28	1.12	5
		e''	13.7300	Conductivity (σ):	1.84	1.76	4.51	5
	Head 2475	e'	39.5800	Relative Permittivity (ϵ_r):	39.58	39.17	1.05	5
		e''	13.8400	Conductivity (σ):	1.90	1.83	4.25	5
9/15/2014	Body 2450	e'	50.6800	Relative Permittivity (ϵ_r):	50.68	52.70	-3.83	5
		e''	14.7700	Conductivity (σ):	2.01	1.95	3.18	5
	Body 2410	e'	50.8100	Relative Permittivity (ϵ_r):	50.81	52.76	-3.69	5
		e''	14.6700	Conductivity (σ):	1.97	1.91	3.06	5
	Body 2475	e'	50.6100	Relative Permittivity (ϵ_r):	50.61	52.67	-3.91	5
		e''	14.8300	Conductivity (σ):	2.04	1.99	2.81	5

SAR Lab 3

	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
9/11/2014	Head 1900	e'	39.8000	Relative Permittivity (ε _r):	39.80	40.00	-0.50	5
		e"	13.2600	Conductivity (σ):	1.40	1.40	0.06	5
	Head 1850	e'	40.0600	Relative Permittivity (ε _r):	40.06	40.00	0.15	5
		e"	13.1800	Conductivity (σ):	1.36	1.40	-3.16	5
	Head 1910	e'	39.7600	Relative Permittivity (ε _r):	39.76	40.00	-0.60	5
		e"	13.2800	Conductivity (σ):	1.41	1.40	0.74	5
9/11/2014	Body 1900	e'	52.3000	Relative Permittivity (ε _r):	52.30	53.30	-1.88	5
		e"	14.3200	Conductivity (σ):	1.51	1.52	-0.47	5
	Body 1850	e'	52.5200	Relative Permittivity (ε _r):	52.52	53.30	-1.46	5
		e"	14.2100	Conductivity (σ):	1.46	1.52	-3.83	5
	Body 1910	e'	52.2700	Relative Permittivity (ε _r):	52.27	53.30	-1.93	5
		e"	14.3400	Conductivity (σ):	1.52	1.52	0.19	5
9/15/2014	Head 1900	e'	39.3100	Relative Permittivity (ε _r):	39.31	40.00	-1.72	5
		e"	13.2200	Conductivity (σ):	1.40	1.40	-0.24	5
	Head 1850	e'	39.5300	Relative Permittivity (ε _r):	39.53	40.00	-1.18	5
		e"	13.1000	Conductivity (σ):	1.35	1.40	-3.75	5
	Head 1910	e'	39.3100	Relative Permittivity (ε _r):	39.31	40.00	-1.72	5
		e"	13.2200	Conductivity (σ):	1.40	1.40	0.28	5
9/15/2014	Body 1900	e'	51.3700	Relative Permittivity (ε _r):	51.37	53.30	-3.62	5
		e"	14.3300	Conductivity (σ):	1.51	1.52	-0.40	5
	Body 1850	e'	51.5600	Relative Permittivity (ε _r):	51.56	53.30	-3.26	5
		e"	14.2200	Conductivity (σ):	1.46	1.52	-3.77	5
	Body 1910	e'	51.3400	Relative Permittivity (ε _r):	51.34	53.30	-3.68	5
		e"	14.3400	Conductivity (σ):	1.52	1.52	0.19	5

10. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

10.1. Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D835V2	4d002	11/15/2013	835	1g	9.49	9.43
				10g	6.18	6.21
D1900V2	5d043	11/12/2013	1900	1g	40.1	39.0
				10g	21.1	20.8
D2450V2	706	5/20/2014	2450	1g	53.0	50.2
				10g	24.5	23.4

10.2. System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab 2

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta $\pm 10\%$	Est./Zoom Ratio	Plot No.
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W				
9/11/2014	D835V2	4d002	Head	1g	0.974	0.954	9.54	9.49	0.53	1,2
				10g	0.659	0.661	6.61	6.18	6.96	
9/11/2014	D835V2	4d002	Body	1g	0.952	0.947	9.47	9.43	0.42	0.53
				10g	0.644	0.659	6.59	6.21	6.12	
9/15/2014	D2450V2	706	Head	1g	5.21	5.18	51.8	53.00	-2.26	0.58
				10g	2.28	2.53	25.3	24.50	3.27	
9/15/2014	D2450V2	706	Body	1g	5.04	5.14	51.4	50.20	2.39	-1.98
				10g	2.20	2.55	25.5	23.40	8.97	

SAR Lab 3

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta $\pm 10\%$	Est./Zoom Ratio	Plot No.
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W				
9/11/2014	D1900V2	5d043	Head	1g	4.03	3.95	39.5	40.10	-1.50	1.99
				10g	2.10	2.04	20.4	21.10	-3.32	
9/11/2014	D1900V2	5d043	Body	1g	3.88	3.86	38.6	39.00	-1.03	0.52
				10g	2.01	2.01	20.1	20.80	-3.37	
9/15/2014	D1900V2	5d043	Head	1g	4.05	3.97	39.7	40.10	-1.00	1.98
				10g	2.12	2.03	20.3	21.10	-3.79	
9/15/2014	D1900V2	5d043	Body	1g	3.82	3.74	37.4	39.00	-4.10	2.09
				10g	1.95	1.94	19.4	20.80	-6.73	

11. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 941225 D01 SAR test for 3G devices:

Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least $\frac{1}{4}$ dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

KDB 248227 D01 SAR Measurements Procedures for 802.11 a/b/g Transmitters v01r02 (pg.6):

Each channel should be tested at the lowest data rate in each a-b/g mode or 4.9 GHz channel BW configuration.

When the extrapolated maximum peak SAR for the maximum output channel is ≤ 1.6 W/kg and the 1-g averaged SAR is ≤ 0.8 W/kg, testing of other channels in the “default test channels” or “required test channels” configuration is optional.

11.1. GSM850

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	190	836.6	33.0	33.0	0.352	0.352	1
			Left Tilt	190	836.6	33.0	33.0	0.192	0.192	
			Right Touch	190	836.6	33.0	33.0	0.274	0.274	
			Right Tilt	190	836.6	33.0	33.0	0.186	0.186	
Head VoIP	GPRS 1 Slots	0	Left Touch	190	836.6	33.0	33.0	0.352	0.352	2
			Left Tilt	190	836.6	33.0	33.0	0.192	0.192	
			Right Touch	190	836.6	33.0	33.0	0.274	0.274	
			Right Tilt	190	836.6	33.0	33.0	0.186	0.186	
Body-worn	Voice	10	Rear	190	836.6	33.0	33.0	0.430	0.430	3
			Front	190	836.6	33.0	33.0	0.323	0.323	
Body-worn(VoIP) & Hotspot	GPRS 1 Slots	10	Rear	190	836.6	33.0	33.0	0.430	0.430	4
Front			190	836.6	33.0	33.0	0.323	0.323		
Hotspot			Edge 2	190	836.6	33.0	33.0	0.152	0.152	
			Edge 3	190	836.6	33.0	33.0	0.145	0.145	
			Edge 4	190	836.6	33.0	33.0	0.301	0.301	

11.2. GSM1900

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	661	1880.0	30.0	29.4	0.177	0.203	5
			Left Tilt	661	1880.0	30.0	29.4	0.037	0.042	
			Right Touch	661	1880.0	30.0	29.4	0.092	0.106	
			Right Tilt	661	1880.0	30.0	29.4	0.064	0.074	
Head VoIP	GPRS 1 Slots	0	Left Touch	661	1880.0	30.0	29.4	0.157	0.180	6
			Left Tilt	661	1880.0	30.0	29.4	0.034	0.039	
			Right Touch	661	1880.0	30.0	29.4	0.083	0.095	
			Right Tilt	661	1880.0	30.0	29.4	0.061	0.069	
Body-worn	Voice	10	Rear	661	1880.0	30.0	29.4	0.368	0.423	
			Front	661	1880.0	30.0	29.4	0.441	0.506	7
Body-worn(VoIP) & Hotspot	GPRS 1 Slots	10	Rear	661	1880.0	30.0	29.4	0.333	0.382	
Front			661	1880.0	30.0	29.4	0.435	0.499	8	
Hotspot			Edge 2	661	1880.0	30.0	29.4	0.041	0.047	
			Edge 3	661	1880.0	30.0	29.4	0.315	0.362	
			Edge 4	661	1880.0	30.0	29.4	0.149	0.171	

11.3. W-CDMA Band V

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	4183	836.6	23.0	22.8	0.319	0.334	9
			Left Tilt	4183	836.6	23.0	22.8	0.189	0.198	
			Right Touch	4183	836.6	23.0	22.8	0.247	0.259	
			Right Tilt	4183	836.6	23.0	22.8	0.181	0.190	
Body-worn & Hotspot	Rel 99 RMC	10	Rear	4183	836.6	23.0	22.8	0.378	0.396	10
			Front	4183	836.6	23.0	22.8	0.302	0.316	
Hotspot	Rel 99 RMC	10	Edge 2	4183	836.6	23.0	22.8	0.183	0.192	
			Edge 3	4183	836.6	23.0	22.8	0.133	0.139	
			Edge 4	4183	836.6	23.0	22.8	0.286	0.299	

11.4. W-CDMA Band II

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	9400	1880.0	23.0	22.4	0.340	0.390	11
			Left Tilt	9400	1880.0	23.0	22.4	0.071	0.082	
			Right Touch	9400	1880.0	23.0	22.4	0.223	0.256	
			Right Tilt	9400	1880.0	23.0	22.4	0.130	0.149	
Body-worn & Hotspot	Rel 99 RMC	10	Rear	9400	1880.0	23.0	22.4	0.640	0.735	
			Front	9262	1852.4	23.0	22.6	0.720	0.789	
				9400	1880.0	23.0	22.4	0.781	0.897	
				9538	1907.6	23.0	22.5	0.906	1.017	12
Hotspot	Rel 99 RMC	10	Edge 2	9400	1880.0	23.0	22.4	0.083	0.095	
			Edge 3	9400	1880.0	23.0	22.4	0.607	0.697	
			Edge 4	9400	1880.0	23.0	22.4	0.263	0.302	

11.5. LTE Band 2 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	18900	1880.0	1	0	23.0	22.7	0.376	0.402	13
						50	0	22.0	21.4	0.281	0.320	
			Left Tilt	18900	1880.0	1	0	23.0	22.7	0.075	0.080	
						50	0	22.0	21.4	0.052	0.059	
			Right Touch	18900	1880.0	1	0	23.0	22.7	0.203	0.217	
						50	0	22.0	21.4	0.159	0.181	
			Right Tilt	18900	1880.0	1	0	23.0	22.7	0.100	0.107	
						50	0	22.0	21.4	0.087	0.099	
Body-worn & Hotspot	QPSK	10	Rear	18900	1880.0	1	0	23.0	22.7	0.619	0.662	
			Front	18700	1860.0	50	0	22.0	21.4	0.474	0.539	
						1	0	23.0	22.8	0.729	0.760	
				18900	1880.0	1	0	23.0	22.7	0.810	0.866	
						50	0	22.0	21.4	0.615	0.700	
				18900	1900.0	1	0	23.0	22.7	0.841	0.907	14
Hotspot	QPSK	10	Edge 2	18900	1880.0	1	0	23.0	22.7	0.079	0.085	
						50	0	22.0	21.4	0.058	0.066	
			Edge 3	18900	1880.0	1	0	23.0	22.7	0.619	0.662	
						50	0	22.0	21.4	0.477	0.543	
			Edge 4	18900	1880.0	1	0	23.0	22.7	0.266	0.284	
						50	0	22.0	21.4	0.199	0.226	

11.6. LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	20525	836.5	1	49	23.0	22.1	0.260	0.317	15
						25	0	22.0	21.1	0.214	0.262	
			Left Tilt	20525	836.5	1	49	23.0	22.1	0.148	0.180	
						25	0	22.0	21.1	0.127	0.156	
			Right Touch	20525	836.5	1	49	23.0	22.1	0.199	0.243	
						25	0	22.0	21.1	0.158	0.193	
Body-worn & Hotspot	QPSK	10	Rear	20525	836.5	1	49	23.0	22.1	0.323	0.394	16
						25	0	22.0	21.1	0.249	0.305	
			Front	20525	836.5	1	49	23.0	22.1	0.234	0.285	
						25	0	22.0	21.1	0.189	0.231	
Hotspot	QPSK	10	Edge 2	20525	836.5	1	49	23.0	22.1	0.106	0.129	
						25	0	22.0	21.1	0.094	0.115	
			Edge 3	20525	836.5	1	49	23.0	22.1	0.105	0.128	
						25	0	22.0	21.1	0.083	0.101	
			Edge 4	20525	836.5	1	49	23.0	22.1	0.212	0.258	
						25	0	22.0	21.1	0.180	0.220	

11.7. Wi-Fi (DTS Band)

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
2.4 GHz	Head	802.11b 1 Mbps	0	Left Touch	6	2437.0	17.5	16.5	0.100	0.126	
				Left Tilt	6	2437.0	17.5	16.5	0.093	0.117	
				Right Touch	6	2437.0	17.5	16.5	0.189	0.238	17
				Right Tilt	6	2437.0	17.5	16.5	0.093	0.117	
	Body-worn & Hotspot & Wi-Fi Direct	802.11b 1 Mbps	10	Rear	6	2437.0	17.5	16.5	0.246	0.310	18
				Front	6	2437.0	17.5	16.5	0.062	0.079	
	Hotspot & Wi-Fi Direct	802.11b 1 Mbps	10	Edge 1	6	2437.0	17.5	16.5	0.058	0.074	
				Edge 4	6	2437.0	17.5	16.5	0.173	0.218	

11.8. Bluetooth

11.8.1. Standalone SAR Test Exclusion Considerations

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	Result
(dBm)	(mW)			
10.5	11	10	2.480	1.7

Conclusion:

The computed value is < 3 ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

11.8.2. Estimated SAR

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}/x}]$ W/kg for test separation distances ≤ 50 mm;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Estimated SAR Result for Body-worn Accessory Conditions:

Test Configuration	Max. tune-up tolerance limit (mW)	Min. test separation distance (mm)	Frequency (GHz)	Estimated 1-g SAR (W/kg)
Rear/Front	11	10	2.480	0.231

12. SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

12.1. The Highest Measured SAR Configuration in Each Frequency Band

Frequency Band (MHz)	Air Interface	Head (W/kg)	Body-worn Accessory (W/kg)	Wireless Router (Hotspot) and Wi-Fi Direct (W/kg)	Repeated SAR (Yes/No)
850	GSM 850		0.430		No
	WCDMA Band V				No
	LTE Band 5				No
1900	GSM 1900				No
	WCDMA Band II		0.906		Yes
	LTE Band 2				No
2400	Wi-Fi 802.11b/g/n		0.246		No

12.2. Repeated Measurement Results

Head

N/A

Body-worn Accessory, Wireless Router (Hotspot) and Wi-Fi Direct

Frequency band	Test Position	Mode	Ch #.	Freq. (MHz)	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
					Original	Repeated	
W-CDMA Band II	Front	Rel. 99 RMC 12.2kbps	9538	1907.6	0.906	0.869	1.04

Conclusion:

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

13. Simultaneous Transmission SAR Analysis

13.1. Sum of the SAR for GSM850 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① GSM850	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.352	0.126		0.478	No
	Left Tilt	① + ②	0.192	0.117		0.309	No
	Right Touch	① + ②	0.274	0.238		0.512	No
	Right Tilt	① + ②	0.186	0.117		0.303	No
Body-worn Accessory & Hotspot	Rear	① + ②	0.430	0.310		0.740	No
		① + ③	0.430		0.236	0.666	No
	Front	① + ②	0.323	0.079		0.402	No
		① + ③	0.323		0.236	0.559	No
Hotspot	Edge 1	① + ②		0.074		0.074	No
	Edge 2	① + ②	0.152			0.152	No
	Edge 3	① + ②	0.145			0.145	No
	Edge 4	① + ②	0.301	0.218		0.519	No

13.2. Sum of the SAR for GSM1900 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① GSM1900	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.203	0.126		0.329	No
	Left Tilt	① + ②	0.042	0.117		0.159	No
	Right Touch	① + ②	0.106	0.238		0.344	No
	Right Tilt	① + ②	0.074	0.117		0.191	No
Body-worn Accessory & Hotspot	Rear	① + ②	0.423	0.310		0.732	No
		① + ③	0.423		0.236	0.658	No
	Front	① + ②	0.506	0.079		0.585	No
		① + ③	0.506		0.236	0.742	No
Hotspot	Edge 1	① + ②		0.074		0.074	No
	Edge 2	① + ②	0.047			0.047	No
	Edge 3	① + ②	0.362			0.362	No
	Edge 4	① + ②	0.171	0.218		0.389	No

13.3. Sum of the SAR for WCDMA Band V & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① W-CDMA Band V	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.334	0.126		0.460	No
	Left Tilt	① + ②	0.198	0.117		0.315	No
	Right Touch	① + ②	0.259	0.238		0.497	No
	Right Tilt	① + ②	0.190	0.117		0.307	No
Body-worn Accessory & Hotspot	Rear	① + ②	0.396	0.310		0.706	No
		① + ③	0.396		0.236	0.631	No
	Front	① + ②	0.316	0.079		0.395	No
		① + ③	0.316		0.236	0.552	No
Hotspot	Edge 1	① + ②		0.074		0.074	No
	Edge 2	① + ②	0.192			0.192	No
	Edge 3	① + ②	0.139			0.139	No
	Edge 4	① + ②	0.299	0.218		0.517	No

13.4. Sum of the SAR for WCDMA Band II & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① W-CDMA Band II	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.390	0.126		0.516	No
	Left Tilt	① + ②	0.082	0.117		0.199	No
	Right Touch	① + ②	0.256	0.238		0.494	No
	Right Tilt	① + ②	0.149	0.117		0.267	No
Body-worn Accessory & Hotspot	Rear	① + ②	0.735	0.310		1.045	No
		① + ③	0.735		0.236	0.970	No
	Front	① + ②	1.017	0.079		1.095	No
		① + ③	1.017		0.236	1.252	No
Hotspot	Edge 1	① + ②		0.074		0.074	No
	Edge 2	① + ②	0.095			0.095	No
	Edge 3	① + ②	0.697			0.697	No
	Edge 4	① + ②	0.302	0.218		0.520	No

13.5. Sum of the SAR for LTE Band 2 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① LTE Band 2	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.402	0.126		0.528	No
	Left Tilt	① + ②	0.080	0.117		0.197	No
	Right Touch	① + ②	0.217	0.238		0.455	No
	Right Tilt	① + ②	0.107	0.117		0.224	No
Body-worn Accessory & Hotspot	Rear	① + ②	0.662	0.310		0.971	No
		① + ③	0.662		0.236	0.897	No
	Front	① + ②	0.907	0.079		0.986	No
		① + ③	0.907		0.236	1.143	No
Hotspot	Edge 1	① + ②		0.074		0.074	No
	Edge 2	① + ②	0.085			0.085	No
	Edge 3	① + ②	0.662			0.662	No
	Edge 4	① + ②	0.284	0.218		0.502	No

13.6. Sum of the SAR for LTE Band 5 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① LTE Band 5	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.317	0.126		0.443	No
	Left Tilt	① + ②	0.180	0.117		0.297	No
	Right Touch	① + ②	0.243	0.238		0.481	No
	Right Tilt	① + ②	0.184	0.117		0.301	No
Body-worn Accessory & Hotspot	Rear	① + ②	0.394	0.310		0.703	No
		① + ③	0.394		0.236	0.629	No
	Front	① + ②	0.285	0.079		0.364	No
		① + ③	0.285		0.236	0.521	No
Hotspot	Edge 1	① + ②		0.074		0.074	No
	Edge 2	① + ②	0.129			0.129	No
	Edge 3	① + ②	0.128			0.128	No
	Edge 4	① + ②	0.258	0.218		0.476	No

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

14. Appendixes

Refer to separated files for the following appendixes.

- 14.1. Photos and Antenna Locations**
- 14.2. System Performance Check Plots**
- 14.3. Highest SAR Test Plots**
- 14.4. Calibration Certificate for E-Field Probe EX3DV4 - SN 3531**
- 14.5. Calibration Certificate for E-Field Probe EX3DV4 - SN 3773**
- 14.6. Calibration Certificate for D835V2 - SN 4d002**
- 14.7. Calibration Certificate for D1900V2- SN 5d043**
- 14.8. Calibration Certificate for D2450V2 - SN 706**

END OF REPORT