



SAR EVALUATION REPORT

Applicant Name:

Samsung Electronics, Co. Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do 443-742, Korea

Date of Testing:

01/19/15 - 02/02/15

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Document Serial No.:

0Y1501190154-R1.A3L

FCC ID:
A3LSMG925T
APPLICANT:
SAMSUNG ELECTRONICS, CO. LTD.
DUT Type:

Portable Handset

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model(s):

SM-G925T

Equipment Class	Band & Mode	Tx Frequency	SAR		
			1 gm Head (W/kg)	1 gm Body-Worn (W/kg)	1 gm Hotspot (W/kg)
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.13	0.23	0.65
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	< 0.1	0.28	0.51
PCE	UMTS 850	826.40 - 846.60 MHz	0.12	0.19	0.45
PCE	UMTS 1750	1712.4 - 1752.5 MHz	0.22	0.60	0.57
PCE	UMTS 1900	1852.4 - 1907.6 MHz	0.18	0.43	0.53
PCE	LTE Band 12	699.7 - 715.3 MHz	0.34	0.45	0.36
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	0.16	0.32	0.38
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	0.20	0.64	0.77
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	0.18	0.35	0.49
DTS	2.4 GHz WLAN	2412 - 2462 MHz	0.51	0.13	0.13
NII	U-NII-1	5180 - 5240 MHz		N/A	
NII	U-NII-2A	5260 - 5320 MHz	0.55	0.20	
NII	U-NII-2C < 5.65 GHz	5500 - 5580 MHz	0.50	< 0.1	
NII	U-NII-2C > 5.65 GHz + U-NII-3	5660 - 5825 MHz	0.36	< 0.1	0.12
DSS/DTS	Bluetooth	2402 - 2480 MHz		N/A	
Simultaneous SAR per KDB 690783 D01v01r03:			1.19	0.90	0.96

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.8 of this report; for North American frequency bands only.

This revised Test Report (S/N: 0Y1501190154-R1.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President



The SAR Tick is an initiative of the Mobile Manufacturers Forum (MMF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MMF. Further details can be obtained by emailing: sartick@mmfai.info.

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 1 of 103

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	11
3	INTRODUCTION	12
4	DOSIMETRIC ASSESSMENT	13
5	DEFINITION OF REFERENCE POINTS	14
6	TEST CONFIGURATION POSITIONS FOR HANDSETS	15
7	RF EXPOSURE LIMITS	18
8	FCC MEASUREMENT PROCEDURES.....	19
9	RF CONDUCTED POWERS.....	24
10	SYSTEM VERIFICATION.....	74
11	SAR DATA SUMMARY	76
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	86
13	SAR MEASUREMENT VARIABILITY	97
14	EQUIPMENT LIST	98
15	MEASUREMENT UNCERTAINTIES	99
16	CONCLUSION.....	101
17	REFERENCES	102
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 2 of 103	

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.5 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2462 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C < 5.65 GHz	Voice/Data	5500-5580 MHz
U-NII-2C > 5.65 GHz + U-NII-3	Voice/Data	5660 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz
ANT+	Data	2402 - 2480 MHz
MST	Data	1 - 8.3 kHz

1.2 Power Reduction for SAR

This device utilizes two single step independent power reduction mechanisms for SAR compliance. For the main transmitter, the device utilizes power reduction under portable hotspot conditions for all licensed transmitter modes. All hotspot SAR evaluations for this device were performed with the maximum allowed output power in hotspot mode. Additionally for the unlicensed transmitter, this device utilizes an proximity sensor to reduced the output power for 2.4 and 5 GHz WLAN during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528. The reduced powers for both mechanisms were confirmed via conducted power measurements at the RF port (See Section 9). Detailed descriptions of the hotspot power reduction and proximity sensor mechanisms are included in the operational description.

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v05.

1.3.1 Maximum Powers

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	33.5	33.5	32.5	30.0	29.0	27.5	26.5	24.0	23.0
	Nominal	33.0	33.0	32.0	29.5	28.5	27.0	26.0	23.5	22.5
GSM/GPRS/EDGE 1900	Maximum	31.0	31.0	30.5	27.5	26.5	27.0	26.0	23.5	22.0
	Nominal	30.5	30.5	30.0	27.0	26.0	26.5	25.5	23.0	21.5

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 3 of 103

Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA Rel 99	3GPP HSDPA Rel 5	3GPP HSUPA Rel 6	3GPP DC- HSDPA Rel 8
UMTS Band 5 (850 MHz)	Maximum	24.5	24.5	24.5	24.5
	Nominal	24.0	24.0	24.0	24.0
UMTS Band 4 (1750 MHz)	Maximum	24.5	24.5	24.5	24.5
	Nominal	24.0	24.0	24.0	24.0
UMTS Band 2 (1900 MHz)	Maximum	24.5	24.5	24.5	24.5
	Nominal	24.0	24.0	24.0	24.0
Mode / Band		Modulated Average (dBm)			
LTE Band 12	Maximum	25.0			
	Nominal	24.5			
LTE Band 5 (Cell)	Maximum	25.0			
	Nominal	24.5			
LTE Band 4 (AWS)	Maximum	25.0			
	Nominal	24.5			
LTE Band 2 (PCS)	Maximum	25.0			
	Nominal	24.5			
LTE Band 17	Maximum	25.0			
	Nominal	24.5			

Single Transmission Chain WLAN and Bluetooth

Mode / Band		Modulated Average (dBm)
IEEE 802.11b (2.4 GHz)	Maximum	17.5
	Nominal	17.0
IEEE 802.11g (2.4 GHz)	Maximum	16.5
	Nominal	16.0
IEEE 802.11n (2.4 GHz)	Maximum	15.5
	Nominal	15.0
Bluetooth	Maximum	11.5
	Nominal	11.0
Bluetooth LE	Maximum	8.0
	Nominal	7.5

Mode / Band		Modulated Average (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	14.5		
	Nominal	14.0		
IEEE 802.11n (5 GHz)	Maximum	14.5	12.5	
	Nominal	14.0	12.0	
IEEE 802.11ac (5 GHz)	Maximum	13.5	12.5	11.5
	Nominal	13.0	12.0	11.0

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 4 of 103	

MIMO WLAN

Mode / Band		Modulated Average (dBm)	
IEEE 802.11n (2.4 GHz)	Maximum	18.5	
	Nominal	18.0	

Mode / Band		Modulated Average (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11n (5 GHz)	Maximum	17.5	15.5	
	Nominal	17.0	15.0	
IEEE 802.11ac (5 GHz)	Maximum	16.5	15.5	14.5
	Nominal	16.0	15.0	14.0

1.3.2 Reduced Powers – Hotspot Active

Mode / Band		Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	33.0	31.5	29.0	28.0	27.0	25.5	23.5	22.0
	Nominal	32.5	31.0	28.5	27.5	26.5	25.0	23.0	21.5
GSM/GPRS/EDGE 1900	Maximum	30.5	30.0	27.0	26.0	26.5	25.5	23.0	21.5
	Nominal	30.0	29.5	26.5	25.5	26.0	25.0	22.5	21.0

Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA Rel 99	3GPP HSDPA Rel 5	3GPP HSUPA Rel 6	3GPP DC-HSDPA Rel 8
UMTS Band 5 (850 MHz)	Maximum	23.0	23.0	23.0	23.0
	Nominal	22.5	22.5	22.5	22.5
UMTS Band 4 (1750 MHz)	Maximum	21.0	21.0	21.0	21.0
	Nominal	20.5	20.5	20.5	20.5
UMTS Band 2 (1900 MHz)	Maximum	21.0	21.0	21.0	21.0
	Nominal	20.5	20.5	20.5	20.5

Mode / Band		Modulated Average (dBm)
LTE Band 12	Maximum	23.5
	Nominal	23.0
LTE Band 17	Maximum	23.5
	Nominal	23.0
LTE Band 5 (Cell)	Maximum	23.5
	Nominal	23.0
LTE Band 4 (AWS)	Maximum	21.5
	Nominal	21.0
LTE Band 2 (PCS)	Maximum	21.5
	Nominal	21.0

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 5 of 103	

1.3.3 Reduced Powers – Held-to-Ear

Single Transmission Chain WLAN- Proximity Sensor Active:

Mode / Band		Modulated Average (dBm)
IEEE 802.11b (2.4 GHz)	Maximum	15.5
	Nominal	15.0
IEEE 802.11g (2.4 GHz)	Maximum	15.5
	Nominal	15.0
IEEE 802.11n (2.4 GHz)	Maximum	15.5
	Nominal	15.0

Mode / Band		Modulated Average (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	9.5		
	Nominal	9.0		
IEEE 802.11n (5 GHz)	Maximum	9.5		
	Nominal	9.0		
IEEE 802.11ac (5 GHz)	Maximum	9.5	8.5	8.5
	Nominal	9.0	8.0	8.0

MIMO WLAN- Proximity Sensor Active:

Mode / Band		Modulated Average (dBm)
IEEE 802.11n (2.4 GHz)	Maximum	18.5
	Nominal	18.0

Mode / Band		Modulated Average (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11n (5 GHz)	Maximum	12.5	11.5	
	Nominal	12.0	11.0	
IEEE 802.11ac (5 GHz)	Maximum	12.5	11.5	11.5
	Nominal	12.0	11.0	11.0

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 6 of 103	

1.4 DUT Antenna Locations

- A diagram showing the location of the device antennas can be found in Appendix F. Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC filing.
- The overall dimensions of this device are > 9 x 5 cm. The overall diagonal dimension of the device is <160 mm and the diagonal display is <150 mm.

Table 1-1
Sides for SAR Testing

Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	Yes	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 1750	Yes	Yes	No	Yes	Yes	Yes
UMTS 1900	Yes	Yes	No	Yes	Yes	Yes
LTE Band 12	Yes	Yes	No	Yes	Yes	Yes
LTE Band 5 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 4 (AWS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 2 (PCS)	Yes	Yes	No	Yes	Yes	Yes
2.4 GHz WLAN	Yes	Yes	Yes	No	No	Yes
5.8 GHz WLAN	Yes	Yes	Yes	No	No	Yes

Note: Particular DUT edges were not required to be evaluated for Wireless Router SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v01 guidance, page 2. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled, U-NII-1, U-NII-2A & U-NII-2C WLAN operations are disabled. Therefore U-NII-1, U-NII-2A & U-NII-2C WLAN operations are not considered in this section.

1.5 Near Field Communications (NFC) Antenna

This DUT has NFC Operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in Appendix F.

1.6 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D05v01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 1-1 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



Figure 1-1
Simultaneous Transmission Paths

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 7 of 103

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v05 3) procedures.

Table 1-2
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router
1	GSM voice + 2.4 GHz WI-FI	Yes	Yes	N/A
2	GSM voice + 5 GHz WI-FI	Yes	Yes	N/A
3	GSM voice + 2.4 GHz Bluetooth	N/A	Yes	N/A
4	UMTS + 2.4 GHz WI-FI	Yes	Yes	Yes
5	UMTS + 5 GHz WI-FI	Yes	Yes	Yes
6	UMTS + 2.4 GHz Bluetooth	N/A	Yes	N/A
7	LTE + 2.4 GHz WI-FI	Yes	Yes	Yes
8	LTE + 5 GHz WI-FI	Yes	Yes	Yes
9	LTE + 2.4 GHz Bluetooth	N/A	Yes	N/A
10	GPRS/EDGE + 2.4 GHz WI-FI	N/A	N/A	Yes
11	GPRS/EDGE + 5 GHz WI-FI	N/A	N/A	Yes

1. 2.4 GHz WLAN, 5 GHz WLAN, and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
2. All licensed modes share the same antenna path and cannot transmit simultaneously.
3. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
4. Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
5. 5 GHz Wireless Router is only supported for the U-NII-3 Band by S/W, therefore U-NII1, U-NII-2A, & U-NII-2C Bands were not evaluated for wireless router conditions.
6. This device supports 2x2 MIMO Tx for WLAN 802.11n/ac. Each WLAN antenna can transmit independently or together when operating with MIMO.
7. This device supports VoLTE.

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 8 of 103

1.7 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-1, U-NII-2A & U-NII-2C WIFI, only 2.4 GHz and UNII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02.

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB 248227 D01 DR02-41929.

Since this device supports the band gap channels, the channels in the U-NII-2C band above 5.65 GHz were grouped with the channels in the U-NII-3 as a single aggregate band. The channels in UNII-2C below 5.65 GHz were considered separately for SAR evaluation

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 2 Tx antenna output
- d) 256 QAM is supported
- e) Band gap channels are supported

Per FCC KDB 447498 D01v05, the 1g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, body-worn Bluetooth SAR was not required; $[(14/15) * \sqrt{2.480}] = 1.5 < 3.0$. Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

(B) Licensed Transmitter(s)

GSM/GPRS DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02.

This device supports both LTE Band 12 and LTE Band 17. Since the supported frequency span for LTE Band 17 falls completely within the supported frequency span for LTE Band 12, both LTE bands have the same target power, and both LTE bands share the same transmission path, SAR was only assessed for LTE Band 12.

This device supports inter-band LTE Carrier Aggregation (CA) in the downlink only. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r01, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

FCC ID: A3LSMG925T	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset
		Page 9 of 103

1.8 Guidance Applied

- IEEE 1528-2003
- FCC KDB Publication 941225 D01v03, D05v02r03, D05Av01r01, D06v01r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01 DR02-41929 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v05r02 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r03, D02v01r01 (SAR Measurements up to 6 GHz)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)

1.9 Device Serial Numbers

Several samples were used with identical hardware to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

Mode	Head Serial Number	Body-Worn Serial Number	Hotspot Serial Number
GSM/GPRS/EDGE 850	15C02	15C02	15C75
GSM/GPRS/EDGE 1900	15C03	15C03	15C01
UMTS 850	15C02	15C02	15C75
UMTS 1750	15C00	15C00	15C75
UMTS 1900	15C03	15C03	15C01
LTE Band 12	15C76	15C76	15C75
LTE Band 5 (Cell)	15C76	15C76	15C75
LTE Band 4 (AWS)	15C09	15C09	15C75
LTE Band 2 (PCS)	15C73	15C73	15C75
2.4 GHz WLAN	15624	15624	15624
5 GHz WLAN	15624	15624	15624

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 10 of 103

LTE Information							
FCC ID	A3LSMG925T						
Form Factor	Portable Handset						
Frequency Range of each LTE transmission band	LTE Band 12 (699.7 - 715.3 MHz)						
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)						
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)						
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)						
	LTE Band 17 (706.5 - 713.5 MHz)						
Channel Bandwidths	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz						
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz						
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz						
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz						
	LTE Band 17: 5 MHz, 10 MHz						
Channel Numbers and Frequencies (MHz)	Low	Mid	High				
LTE Band 12: 1.4 MHz	699.7 (23017)	707.5 (23095)	715.3 (23173)				
LTE Band 12: 3 MHz	700.5 (23025)	707.5 (23095)	714.5 (23165)				
LTE Band 12: 5 MHz	701.5 (23035)	707.5 (23095)	713.5 (23155)				
LTE Band 12: 10 MHz	704 (23060)	707.5 (23095)	711 (23130)				
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	836.5 (20525)	848.3 (20643)				
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	836.5 (20525)	847.5 (20635)				
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)				
LTE Band 5 (Cell): 10 MHz	829 (20450)	836.5 (20525)	844 (20600)				
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	1732.5 (20175)	1754.3 (20393)				
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	1732.5 (20175)	1753.5 (20385)				
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)				
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)				
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)				
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)				
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	1880 (18900)	1909.3 (19193)				
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	1880 (18900)	1908.5 (19185)				
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)	1907.5 (19175)				
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)	1905 (19150)				
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)	1902.5 (19125)				
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)				
LTE Band 17: 5 MHz	706.5 (23755)	710 (23790)	713.5 (23825)				
LTE Band 17: 10 MHz	709 (23780)	710 (23790)	711 (23800)				
UE Category	6						
Modulations Supported in UL	QPSK, 16QAM						
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3~6.2.5? (manufacturer attestation to be provided)	YES						
A-MPR (Additional MPR) disabled for SAR Testing?	YES						
LTE Carrier Aggregation Possible Combinations	B12 (PCOI) + B4 (SCOI)	B12 (PCOI) + B2 (SCOI)	B4 (PCOI) + B12 (SCOI)	B4 (PCOI) + B4 (SCOI)	B4 (PCOI) + B2 (SCOI)	B2 (PCOI) + B12 (SCOI)	B2 (PCOI) + B4 (SCOI)
	3MHz (B12) + 5MHz (B4)	3MHz (B12) + 5MHz (B2)	3MHz (B4) + 3MHz (B12)	5MHz (B4) + 5MHz (B4)	5MHz (B4) + 5MHz (B2)	5MHz (B2) + 3MHz (B12)	5MHz (B2) + 5MHz (B4)
	3MHz (B12) + 10MHz (B4)	3MHz (B12) + 10MHz (B2)	3MHz (B4) + 3MHz (B12)	5MHz (B4) + 10MHz (B4)	5MHz (B4) + 10MHz (B2)	5MHz (B2) + 3MHz (B12)	5MHz (B2) + 10MHz (B4)
	3MHz (B12) + 20MHz (B4)	3MHz (B12) + 20MHz (B2)	3MHz (B4) + 3MHz (B12)	5MHz (B4) + 20MHz (B4)	5MHz (B4) + 20MHz (B2)	5MHz (B2) + 3MHz (B12)	5MHz (B2) + 20MHz (B4)
	5MHz (B12) + 5MHz (B4)	5MHz (B12) + 5MHz (B2)	5MHz (B4) + 5MHz (B12)	10MHz (B4) + 5MHz (B4)	10MHz (B4) + 5MHz (B2)	10MHz (B2) + 5MHz (B12)	10MHz (B2) + 5MHz (B4)
	5MHz (B12) + 10MHz (B4)	5MHz (B12) + 10MHz (B2)	5MHz (B4) + 5MHz (B12)	10MHz (B4) + 10MHz (B4)	10MHz (B4) + 10MHz (B2)	10MHz (B2) + 5MHz (B12)	10MHz (B2) + 10MHz (B4)
	5MHz (B12) + 15MHz (B4)	5MHz (B12) + 15MHz (B2)	10MHz (B4) + 3MHz (B12)	10MHz (B4) + 15MHz (B4)	10MHz (B4) + 15MHz (B2)	10MHz (B2) + 10MHz (B12)	10MHz (B2) + 15MHz (B4)
	5MHz (B12) + 20MHz (B4)	5MHz (B12) + 20MHz (B2)	10MHz (B4) + 3MHz (B12)	10MHz (B4) + 20MHz (B4)	10MHz (B4) + 20MHz (B2)	10MHz (B2) + 10MHz (B12)	10MHz (B2) + 20MHz (B4)
	10MHz (B12) + 5MHz (B4)	10MHz (B12) + 5MHz (B2)	10MHz (B4) + 10MHz (B12)	15MHz (B4) + 5MHz (B4)	15MHz (B4) + 5MHz (B2)	10MHz (B2) + 10MHz (B12)	10MHz (B2) + 5MHz (B4)
	10MHz (B12) + 10MHz (B4)	10MHz (B12) + 10MHz (B2)	15MHz (B4) + 3MHz (B12)	15MHz (B4) + 10MHz (B4)	15MHz (B4) + 10MHz (B2)	15MHz (B2) + 3MHz (B12)	15MHz (B2) + 10MHz (B4)
	10MHz (B12) + 15MHz (B4)	10MHz (B12) + 15MHz (B2)	15MHz (B4) + 3MHz (B12)	15MHz (B4) + 15MHz (B4)	15MHz (B4) + 15MHz (B2)	15MHz (B2) + 3MHz (B12)	15MHz (B2) + 15MHz (B4)
	10MHz (B12) + 20MHz (B4)	10MHz (B12) + 20MHz (B2)	15MHz (B4) + 3MHz (B12)	15MHz (B4) + 20MHz (B4)	15MHz (B4) + 20MHz (B2)	15MHz (B2) + 3MHz (B12)	15MHz (B2) + 20MHz (B4)
			20MHz (B4) + 3MHz (B12)	20MHz (B4) + 5MHz (B4)	20MHz (B4) + 5MHz (B2)	20MHz (B2) + 3MHz (B12)	20MHz (B2) + 5MHz (B4)
			20MHz (B4) + 5MHz (B12)	20MHz (B4) + 10MHz (B4)	20MHz (B4) + 10MHz (B2)	20MHz (B2) + 5MHz (B12)	20MHz (B2) + 10MHz (B4)
			20MHz (B4) + 10MHz (B12)	20MHz (B4) + 15MHz (B4)	20MHz (B4) + 15MHz (B2)	20MHz (B2) + 10MHz (B12)	20MHz (B2) + 15MHz (B4)
				20MHz (B4) + 20MHz (B4)	20MHz (B4) + 20MHz (B2)		
					20MHz (B4) + 20MHz (B2)		
					20MHz (B4) + 10MHz (B2)		
					20MHz (B4) + 15MHz (B2)		
					20MHz (B4) + 20MHz (B2)		
	LTE Carrier Aggregation Additional Information	This device does not support full CA features on 3GPP Release 10. It supports a maximum of 2 carriers in the downlink only. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. Due to carrier capability, only the combinations listed above are supported. The following LTE Release 10 Features are not supported: Relay, HetNet, Enhanced MIMO, eICl, WiFi Offloading, MDX, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.					

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 11 of 103
© 2015 PCTEST Engineering Laboratory, Inc.				REV 14.0 M 07/21/2014

3 INTRODUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 12 of 103

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1
Sample SAR Area Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{area}, \Delta y_{area}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{zoom}, \Delta y_{zoom}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{zoom}(n)$	$\Delta z_{zoom}(1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 13 of 103

5

DEFINITION OF REFERENCE POINTS

5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 5-1
Close-Up Side view
of ERP

5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5-2
Front, back and side view of SAM Twin Phantom

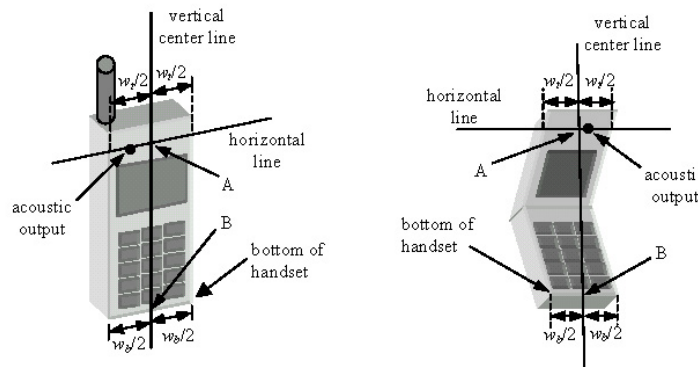


Figure 5-3
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 14 of 103

6 TEST CONFIGURATION POSITIONS FOR HANDSETS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

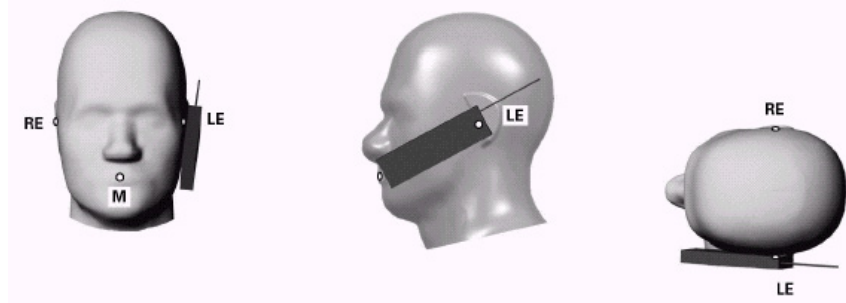


Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 15 of 103

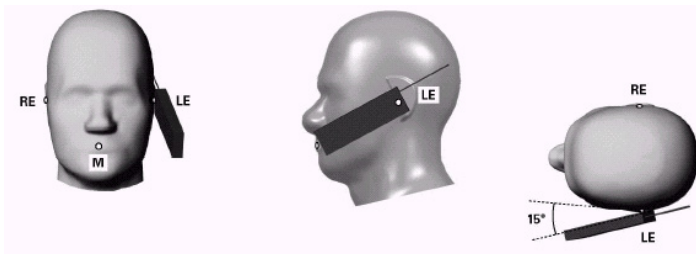


Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position




Figure 6-3 Side view w/ relevant markings

6.4 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v05 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

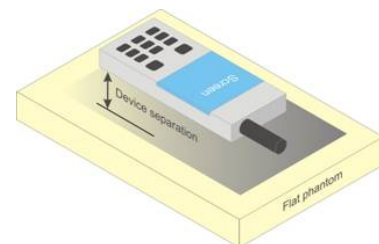


Figure 6-4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

FCC ID: A3LSMG925T	PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SAMSUNG	Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 16 of 103

6.5 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 44798 D01v05 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v05, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

6.6 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

There is power reduction for all licensed transmitter modes. The reduced powers were confirmed via conducted power measurements at the RF port (See Section 9). Detailed description of the hotspot power reduction mechanism are included in the operational description

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 17 of 103

7 RF EXPOSURE LIMITS

7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 7-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 18 of 103

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v05, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r02.

8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03 "3G SAR Measurement Procedures."

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a "point SAR" at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

8.4 SAR Measurement Conditions for UMTS

8.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 19 of 103

12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

8.4.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

8.4.4 SAR Measurements for Handsets with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

8.4.5 SAR Measurements for Handsets with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

8.4.6 SAR Measurement Conditions for DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

8.5 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

FCC ID: A3LSMG925T	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset
		Page 20 of 103

8.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

8.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r01:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.5.5 Carrier Aggregation

LTE Carrier Aggregation (CA) measurements were made in accordance to 3GPP TS 36.521-1 V10.4.0 (2012-12). The RRC connection is only handled by one cell, the Primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds the Secondary component carrier (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to release 8 specifications on the PCC. Additional output powers were measured using two carriers in the downlink for the release 8 configurations with the highest output power among all channels, RB configurations and bandwidths for each uplink band. Per FCC Guidance, no SAR measurements were required.

8.6 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g/n/ac transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v DR02-41929 for more details.

8.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 21 of 103

required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.6.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg.

8.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz are grouped with the 5.8 GHz channels in U-NII-3 band or §15.247 5.8 GHz band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

8.6.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.

8.6.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 22 of 103

8.6.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.6.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output power is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.6.6)

8.6.8 Subsequent Test Configuration Procedures

For OFDM configurations, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration, adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power, is ≤ 1.2 W/kg, no additional SAR testing for the subsequent test configurations is required.

8.6.9 MIMO SAR considerations

Per KDB 248227 D01 DR02-41929, the simultaneous SAR provisions in KDB Publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 23 of 103

9 RF CONDUCTED POWERS

9.1 GSM Conducted Powers

Table 9-1
Maximum Average RF Output Powers

		Maximum Burst-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	33.18	32.88	32.23	29.77	28.68	27.44	26.39	23.77	22.58
	190	33.21	33.15	32.20	29.63	28.40	27.21	26.06	23.70	22.52
	251	32.96	32.76	32.01	29.72	28.56	27.31	26.12	23.47	22.46
GSM 1900	512	30.85	30.68	29.84	26.70	25.91	26.46	25.31	22.82	21.41
	661	30.73	30.73	29.93	26.94	25.93	26.44	25.26	22.87	21.62
	810	30.92	30.93	30.14	27.21	26.27	26.76	25.70	23.27	21.86
		Calculated Maximum Frame-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	24.15	23.85	26.21	25.51	25.67	18.41	20.37	19.51	19.57
	190	24.18	24.12	26.18	25.37	25.39	18.18	20.04	19.44	19.51
	251	23.93	23.73	25.99	25.46	25.55	18.28	20.10	19.21	19.45
GSM 1900	512	21.82	21.65	23.82	22.44	22.90	17.43	19.29	18.56	18.40
	661	21.70	21.70	23.91	22.68	22.92	17.41	19.24	18.61	18.61
	810	21.89	21.90	24.12	22.95	23.26	17.73	19.68	19.01	18.85
GSM 850	Frame	23.97	23.97	25.98	25.24	25.49	17.97	19.98	19.24	19.49
GSM 1900	Avg. Targets:	21.47	21.47	23.98	22.74	22.99	17.47	19.48	18.74	18.49

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 24 of 103

Table 9-2
Reduced Average RF Output Powers – Representing Hotspot Mode Active

		Maximum Burst-Averaged Output Power							
		GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	32.97	31.00	28.99	27.03	27.00	24.87	23.49	21.31
	190	32.81	30.86	28.93	26.76	26.94	24.86	23.36	21.20
	251	32.65	30.63	28.72	26.64	26.90	24.67	23.14	21.10
GSM 1900	512	30.49	29.26	26.46	24.03	26.23	24.42	22.41	20.64
	661	30.45	29.13	26.20	24.00	26.15	24.21	22.54	20.00
	810	30.48	29.21	26.42	24.17	26.50	24.25	22.58	20.21
		Calculated Maximum Frame-Averaged Output Power							
		GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	23.94	24.98	24.73	24.02	17.97	18.85	19.23	18.30
	190	23.78	24.84	24.67	23.75	17.91	18.84	19.10	18.19
	251	23.62	24.61	24.46	23.63	17.87	18.65	18.88	18.09
GSM 1900	512	21.46	23.24	22.20	21.02	17.20	18.40	18.15	17.63
	661	21.42	23.11	21.94	20.99	17.12	18.19	18.28	16.99
	810	21.45	23.19	22.16	21.16	17.47	18.23	18.32	17.20
GSM 850	Frame	23.47	24.98	24.24	24.49	17.47	18.98	18.74	18.49
GSM 1900	Avg.Targets:	20.97	23.48	22.24	22.49	16.97	18.98	18.24	17.99

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GSM Class: B
GPRS Multislot class: 12 (Max 4 Tx uplink slots)
EDGE Multislot class: 12 (Max 4 Tx uplink slots)
DTM Multislot Class: N/A



Figure 9-1
Power Measurement Setup

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 25 of 103	

9.2 UMTS Conducted Powers

Table 9-3
Maximum Average RF Output Powers

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1862	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	23.99	23.95	23.83	23.66	23.73	23.76	23.70	24.12	24.02	-
99		12.2 kbps AMR	23.97	23.94	23.80	23.56	23.69	23.79	23.51	23.94	23.99	-
6	HSDPA	Subtest 1	23.49	23.49	23.36	23.06	23.04	23.17	22.79	22.80	22.70	0
6		Subtest 2	23.38	23.45	23.27	23.10	23.21	23.35	22.77	22.75	22.72	0
6		Subtest 3	22.86	22.72	22.64	22.69	22.96	23.02	22.79	22.73	22.33	0.5
6	HSUPA	Subtest 4	22.00	22.18	22.05	22.05	22.15	22.59	22.00	22.15	22.03	0.5
6		Subtest 1	22.70	22.71	22.70	22.54	22.59	22.67	22.84	23.10	23.05	0
6		Subtest 2	21.54	21.68	21.50	21.36	21.66	21.77	23.00	23.00	23.14	2
6		Subtest 3	22.06	21.90	21.95	22.22	22.31	22.41	22.37	22.18	22.09	1
6		Subtest 4	22.03	21.79	21.51	21.58	21.66	21.79	22.00	21.75	22.57	2
6		Subtest 5	22.73	22.76	22.74	22.61	22.69	22.78	22.51	22.69	22.54	0
8	DC-HSDPA	Subtest 1	23.96	24.15	23.92	22.98	22.97	23.09	24.02	23.84	23.61	0
8		Subtest 2	23.99	24.10	23.89	22.94	22.98	23.02	23.82	23.88	23.61	0
8		Subtest 3	23.61	23.79	23.67	22.68	22.25	22.34	22.94	22.81	22.54	0.5
8		Subtest 4	22.89	22.85	22.77	22.66	22.29	22.30	22.70	22.50	22.38	0.5

Table 9-4
Hotspot Reduced Average RF Output Powers – Representing Hotspot Mode Active

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1862	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	22.18	22.10	22.01	20.52	20.50	20.57	20.85	20.83	20.89	-
99		12.2 kbps AMR	22.21	22.12	22.03	20.50	20.48	20.49	20.87	20.84	20.78	-
6	HSDPA	Subtest 1	22.21	22.18	22.00	20.31	20.42	20.54	20.66	20.61	20.76	0
6		Subtest 2	22.13	22.04	22.02	20.16	20.09	20.12	20.16	20.03	20.24	0
6		Subtest 3	21.77	21.69	21.54	20.89	20.76	20.41	21.00	20.89	20.67	0.5
6		Subtest 4	21.54	21.06	21.15	20.87	20.64	20.33	20.87	20.67	20.48	0.5
6	HSUPA	Subtest 1	22.09	21.40	21.06	20.84	20.67	20.50	20.99	20.96	20.60	0
6		Subtest 2	20.97	20.24	20.97	20.77	20.53	20.16	20.90	20.89	20.57	2
6		Subtest 3	20.87	21.04	21.29	20.64	20.71	20.42	20.88	20.85	20.54	1
6		Subtest 4	20.03	20.11	20.59	20.87	20.51	20.24	20.83	20.64	20.33	2
6		Subtest 5	21.97	21.32	21.00	20.91	20.55	20.43	20.64	20.91	20.52	0
8	DC-HSDPA	Subtest 1	22.41	22.32	22.15	20.34	20.67	20.11	20.54	20.44	20.41	0
8		Subtest 2	22.32	22.21	22.30	20.31	20.56	20.22	20.31	20.38	20.40	0
8		Subtest 3	21.74	21.62	21.87	19.94	20.27	19.95	19.76	19.80	19.82	0.5
8		Subtest 4	21.70	21.53	21.88	19.95	20.37	19.98	19.87	19.54	19.60	0.5

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements
- Measured maximum output powers for DC-HSDPA were not greater than 1/4 dB higher than the WCDMA 12.2 kbps RMC maximum output, as a result, SAR is not required for DC-HSDPA
- The DUT supports UE category 24 for HSDPA

It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.



Figure 9-2
Power Measurement Setup

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 26 of 103

9.3 LTE Conducted Powers

9.3.1 LTE Band 12

Table 9-5
LTE Band 12 Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	707.5	23095	10	QPSK	1	0	24.30	0	0
	707.5	23095	10	QPSK	1	25	24.20	0	0
	707.5	23095	10	QPSK	1	49	24.16	0	0
	707.5	23095	10	QPSK	25	0	22.86	0-1	1
	707.5	23095	10	QPSK	25	12	22.82	0-1	1
	707.5	23095	10	QPSK	25	25	22.79	0-1	1
	707.5	23095	10	QPSK	50	0	22.85	0-1	1
	707.5	23095	10	16QAM	1	0	23.37	0-1	1
	707.5	23095	10	16QAM	1	25	23.18	0-1	1
	707.5	23095	10	16QAM	1	49	23.13	0-1	1
	707.5	23095	10	16QAM	25	0	22.30	0-2	2
	707.5	23095	10	16QAM	25	12	22.15	0-2	2
	707.5	23095	10	16QAM	25	25	22.10	0-2	2
	707.5	23095	10	16QAM	50	0	22.02	0-2	2

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 27 of 103

Table 9-6
LTE Band 12 Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	701.5	23035	5	QPSK	1	0	24.08	0	0
	701.5	23035	5	QPSK	1	12	24.05	0	0
	701.5	23035	5	QPSK	1	24	24.19	0	0
	701.5	23035	5	QPSK	12	0	22.78	0-1	1
	701.5	23035	5	QPSK	12	6	22.81	0-1	1
	701.5	23035	5	QPSK	12	13	22.78	0-1	1
	701.5	23035	5	QPSK	25	0	22.73	0-1	1
	701.5	23035	5	16-QAM	1	0	23.19	0-1	1
	701.5	23035	5	16-QAM	1	12	23.11	0-1	1
	701.5	23035	5	16-QAM	1	24	23.22	0-1	1
	701.5	23035	5	16-QAM	12	0	21.71	0-2	2
	701.5	23035	5	16-QAM	12	6	21.72	0-2	2
Mid	701.5	23035	5	16-QAM	12	13	21.75	0-2	2
	701.5	23035	5	16-QAM	25	0	21.55	0-2	2
	707.5	23095	5	QPSK	1	0	24.26	0	0
	707.5	23095	5	QPSK	1	12	24.29	0	0
	707.5	23095	5	QPSK	1	24	24.20	0	0
	707.5	23095	5	QPSK	12	0	22.92	0-1	1
	707.5	23095	5	QPSK	12	6	22.96	0-1	1
	707.5	23095	5	QPSK	12	13	22.86	0-1	1
	707.5	23095	5	QPSK	25	0	22.94	0-1	1
	707.5	23095	5	16-QAM	1	0	22.98	0-1	1
	707.5	23095	5	16-QAM	1	12	22.94	0-1	1
	707.5	23095	5	16-QAM	1	24	22.93	0-1	1
High	707.5	23095	5	16-QAM	12	0	21.87	0-2	2
	707.5	23095	5	16-QAM	12	6	21.92	0-2	2
	707.5	23095	5	16-QAM	12	13	21.97	0-2	2
	707.5	23095	5	16-QAM	25	0	21.83	0-2	2
	713.5	23155	5	QPSK	1	0	24.07	0	0
	713.5	23155	5	QPSK	1	12	24.04	0	0
	713.5	23155	5	QPSK	1	24	24.19	0	0
	713.5	23155	5	QPSK	12	0	22.93	0-1	1
	713.5	23155	5	QPSK	12	6	22.95	0-1	1
	713.5	23155	5	QPSK	12	13	23.04	0-1	1
	713.5	23155	5	QPSK	25	0	22.96	0-1	1
	713.5	23155	5	16-QAM	1	0	23.35	0-1	1
	713.5	23155	5	16-QAM	1	12	23.31	0-1	1
	713.5	23155	5	16-QAM	1	24	23.48	0-1	1
	713.5	23155	5	16-QAM	12	0	21.79	0-2	2
	713.5	23155	5	16-QAM	12	6	21.85	0-2	2
	713.5	23155	5	16-QAM	12	13	21.86	0-2	2
	713.5	23155	5	16-QAM	25	0	21.81	0-2	2

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 28 of 103	

Table 9-7
LTE Band 12 Conducted Powers - 3 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	700.5	23025	3	QPSK	1	0	24.14	0	0
	700.5	23025	3	QPSK	1	7	24.20	0	0
	700.5	23025	3	QPSK	1	14	24.27	0	0
	700.5	23025	3	QPSK	8	0	22.69	0-1	1
	700.5	23025	3	QPSK	8	4	22.77	0-1	1
	700.5	23025	3	QPSK	8	7	22.79	0-1	1
	700.5	23025	3	QPSK	15	0	22.70	0-1	1
	700.5	23025	3	16-QAM	1	0	23.11	0-1	1
	700.5	23025	3	16-QAM	1	7	23.08	0-1	1
	700.5	23025	3	16-QAM	1	14	23.15	0-1	1
	700.5	23025	3	16-QAM	8	0	21.62	0-2	2
	700.5	23025	3	16-QAM	8	4	21.68	0-2	2
Mid	700.5	23025	3	16-QAM	8	7	21.65	0-2	2
	700.5	23025	3	16-QAM	15	0	21.64	0-2	2
	707.5	23095	3	QPSK	1	0	24.25	0	0
	707.5	23095	3	QPSK	1	7	24.29	0	0
	707.5	23095	3	QPSK	1	14	24.28	0	0
	707.5	23095	3	QPSK	8	0	22.91	0-1	1
	707.5	23095	3	QPSK	8	4	22.92	0-1	1
	707.5	23095	3	QPSK	8	7	22.93	0-1	1
	707.5	23095	3	QPSK	15	0	22.91	0-1	1
	707.5	23095	3	16-QAM	1	0	23.45	0-1	1
	707.5	23095	3	16-QAM	1	7	23.39	0-1	1
	707.5	23095	3	16-QAM	1	14	23.32	0-1	1
High	707.5	23095	3	16-QAM	8	0	21.83	0-2	2
	707.5	23095	3	16-QAM	8	4	21.85	0-2	2
	707.5	23095	3	16-QAM	8	7	21.89	0-2	2
	707.5	23095	3	16-QAM	15	0	21.81	0-2	2
	714.5	23165	3	QPSK	1	0	24.29	0	0
	714.5	23165	3	QPSK	1	7	24.20	0	0
	714.5	23165	3	QPSK	1	14	24.21	0	0
	714.5	23165	3	QPSK	8	0	22.88	0-1	1
	714.5	23165	3	QPSK	8	4	22.98	0-1	1
	714.5	23165	3	QPSK	8	7	22.96	0-1	1
	714.5	23165	3	QPSK	15	0	22.94	0-1	1
	714.5	23165	3	16-QAM	1	0	23.09	0-1	1
	714.5	23165	3	16-QAM	1	7	23.18	0-1	1
	714.5	23165	3	16-QAM	1	14	23.20	0-1	1
	714.5	23165	3	16-QAM	8	0	21.78	0-2	2
	714.5	23165	3	16-QAM	8	4	21.85	0-2	2
	714.5	23165	3	16-QAM	8	7	21.80	0-2	2
	714.5	23165	3	16-QAM	15	0	21.83	0-2	2

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 29 of 103

Table 9-8
LTE Band 12 Conducted Powers – 1.4 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	699.7	23017	1.4	QPSK	1	0	24.15	0	0
	699.7	23017	1.4	QPSK	1	2	24.12	0	0
	699.7	23017	1.4	QPSK	1	5	24.11	0	0
	699.7	23017	1.4	QPSK	3	0	23.80	0	0
	699.7	23017	1.4	QPSK	3	2	23.77	0	0
	699.7	23017	1.4	QPSK	3	3	23.79	0	0
	699.7	23017	1.4	QPSK	6	0	22.66	0-1	1
	699.7	23017	1.4	16-QAM	1	0	22.97	0-1	1
	699.7	23017	1.4	16-QAM	1	2	22.90	0-1	1
	699.7	23017	1.4	16-QAM	1	5	23.01	0-1	1
	699.7	23017	1.4	16-QAM	3	0	22.69	0-1	1
	699.7	23017	1.4	16-QAM	3	2	22.57	0-1	1
	699.7	23017	1.4	16-QAM	3	3	22.60	0-1	1
	699.7	23017	1.4	16-QAM	6	0	21.64	0-2	2
Mid	707.5	23095	1.4	QPSK	1	0	24.28	0	0
	707.5	23095	1.4	QPSK	1	2	24.26	0	0
	707.5	23095	1.4	QPSK	1	5	24.20	0	0
	707.5	23095	1.4	QPSK	3	0	24.05	0	0
	707.5	23095	1.4	QPSK	3	2	24.07	0	0
	707.5	23095	1.4	QPSK	3	3	24.06	0	0
	707.5	23095	1.4	QPSK	6	0	22.94	0-1	1
	707.5	23095	1.4	16-QAM	1	0	23.16	0-1	1
	707.5	23095	1.4	16-QAM	1	2	23.15	0-1	1
	707.5	23095	1.4	16-QAM	1	5	23.24	0-1	1
	707.5	23095	1.4	16-QAM	3	0	23.00	0-1	1
	707.5	23095	1.4	16-QAM	3	2	22.97	0-1	1
	707.5	23095	1.4	16-QAM	3	3	22.90	0-1	1
	707.5	23095	1.4	16-QAM	6	0	21.75	0-2	2
High	715.3	23173	1.4	QPSK	1	0	24.27	0	0
	715.3	23173	1.4	QPSK	1	2	24.21	0	0
	715.3	23173	1.4	QPSK	1	5	24.10	0	0
	715.3	23173	1.4	QPSK	3	0	24.01	0	0
	715.3	23173	1.4	QPSK	3	2	24.14	0	0
	715.3	23173	1.4	QPSK	3	3	24.10	0	0
	715.3	23173	1.4	QPSK	6	0	22.92	0-1	1
	715.3	23173	1.4	16-QAM	1	0	23.22	0-1	1
	715.3	23173	1.4	16-QAM	1	2	23.11	0-1	1
	715.3	23173	1.4	16-QAM	1	5	23.29	0-1	1
	715.3	23173	1.4	16-QAM	3	0	22.85	0-1	1
	715.3	23173	1.4	16-QAM	3	2	22.97	0-1	1
	715.3	23173	1.4	16-QAM	3	3	22.98	0-1	1
	715.3	23173	1.4	16-QAM	6	0	21.92	0-2	2

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 30 of 103	

9.3.2 LTE Band 12 – Representing Hotspot Mode Active

Table 9-9
LTE Band 12 Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	707.5	23095	10	QPSK	1	0	22.63	0	0
	707.5	23095	10	QPSK	1	25	22.70	0	0
	707.5	23095	10	QPSK	1	49	22.59	0	0
	707.5	23095	10	QPSK	25	0	22.51	0-1	0
	707.5	23095	10	QPSK	25	12	22.61	0-1	0
	707.5	23095	10	QPSK	25	25	22.51	0-1	0
	707.5	23095	10	QPSK	50	0	22.60	0-1	0
	707.5	23095	10	16QAM	1	0	22.79	0-1	0
	707.5	23095	10	16QAM	1	25	22.93	0-1	0
	707.5	23095	10	16QAM	1	49	22.80	0-1	0
	707.5	23095	10	16QAM	25	0	22.48	0-2	1
	707.5	23095	10	16QAM	25	12	22.50	0-2	1
	707.5	23095	10	16QAM	25	25	22.47	0-2	1
	707.5	23095	10	16QAM	50	0	22.50	0-2	1

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 31 of 103

Table 9-10
LTE Band 12 Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	701.5	23035	5	QPSK	1	0	22.58	0	0
	701.5	23035	5	QPSK	1	12	22.65	0	0
	701.5	23035	5	QPSK	1	24	22.54	0	0
	701.5	23035	5	QPSK	12	0	22.58	0-1	0
	701.5	23035	5	QPSK	12	6	22.56	0-1	0
	701.5	23035	5	QPSK	12	13	22.59	0-1	0
	701.5	23035	5	QPSK	25	0	22.55	0-1	0
	701.5	23035	5	16-QAM	1	0	22.74	0-1	0
	701.5	23035	5	16-QAM	1	12	22.88	0-1	0
	701.5	23035	5	16-QAM	1	24	22.75	0-1	0
	701.5	23035	5	16-QAM	12	0	22.48	0-2	1
	701.5	23035	5	16-QAM	12	6	22.49	0-2	1
	701.5	23035	5	16-QAM	12	13	22.50	0-2	1
Mid	701.5	23035	5	16-QAM	25	0	22.50	0-2	1
	707.5	23095	5	QPSK	1	0	22.59	0	0
	707.5	23095	5	QPSK	1	12	22.66	0	0
	707.5	23095	5	QPSK	1	24	22.55	0	0
	707.5	23095	5	QPSK	12	0	22.55	0-1	0
	707.5	23095	5	QPSK	12	6	22.57	0-1	0
	707.5	23095	5	QPSK	12	13	22.56	0-1	0
	707.5	23095	5	QPSK	25	0	22.56	0-1	0
	707.5	23095	5	16-QAM	1	0	22.75	0-1	0
	707.5	23095	5	16-QAM	1	12	22.89	0-1	0
	707.5	23095	5	16-QAM	1	24	22.76	0-1	0
	707.5	23095	5	16-QAM	12	0	22.47	0-2	1
	707.5	23095	5	16-QAM	12	6	22.50	0-2	1
	707.5	23095	5	16-QAM	12	13	22.47	0-2	1
High	707.5	23095	5	16-QAM	25	0	22.39	0-2	1
	713.5	23155	5	QPSK	1	0	22.57	0	0
	713.5	23155	5	QPSK	1	12	22.64	0	0
	713.5	23155	5	QPSK	1	24	22.53	0	0
	713.5	23155	5	QPSK	12	0	22.51	0-1	0
	713.5	23155	5	QPSK	12	6	22.55	0-1	0
	713.5	23155	5	QPSK	12	13	22.50	0-1	0
	713.5	23155	5	QPSK	25	0	22.54	0-1	0
	713.5	23155	5	16-QAM	1	0	22.73	0-1	0
	713.5	23155	5	16-QAM	1	12	22.87	0-1	0
	713.5	23155	5	16-QAM	1	24	22.74	0-1	0
	713.5	23155	5	16-QAM	12	0	22.46	0-2	1
	713.5	23155	5	16-QAM	12	6	22.47	0-2	1
	713.5	23155	5	16-QAM	12	13	22.49	0-2	1
	713.5	23155	5	16-QAM	25	0	22.50	0-2	1

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 32 of 103	

Table 9-11
LTE Band 12 Conducted Powers - 3 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	700.5	23025	3	QPSK	1	0	22.60	0	0
	700.5	23025	3	QPSK	1	7	22.67	0	0
	700.5	23025	3	QPSK	1	14	22.56	0	0
	700.5	23025	3	QPSK	8	0	22.60	0-1	0
	700.5	23025	3	QPSK	8	4	22.58	0-1	0
	700.5	23025	3	QPSK	8	7	22.61	0-1	0
	700.5	23025	3	QPSK	15	0	22.57	0-1	0
	700.5	23025	3	16-QAM	1	0	22.76	0-1	0
	700.5	23025	3	16-QAM	1	7	22.90	0-1	0
	700.5	23025	3	16-QAM	1	14	22.77	0-1	0
	700.5	23025	3	16-QAM	8	0	22.47	0-2	1
	700.5	23025	3	16-QAM	8	4	22.50	0-2	1
	700.5	23025	3	16-QAM	8	7	22.49	0-2	1
Mid	700.5	23025	3	16-QAM	15	0	22.39	0-2	1
	707.5	23095	3	QPSK	1	0	22.61	0	0
	707.5	23095	3	QPSK	1	7	22.68	0	0
	707.5	23095	3	QPSK	1	14	22.57	0	0
	707.5	23095	3	QPSK	8	0	22.57	0-1	0
	707.5	23095	3	QPSK	8	4	22.59	0-1	0
	707.5	23095	3	QPSK	8	7	22.58	0-1	0
	707.5	23095	3	QPSK	15	0	22.58	0-1	0
	707.5	23095	3	16-QAM	1	0	22.77	0-1	0
	707.5	23095	3	16-QAM	1	7	22.91	0-1	0
	707.5	23095	3	16-QAM	1	14	22.78	0-1	0
	707.5	23095	3	16-QAM	8	0	22.50	0-2	1
	707.5	23095	3	16-QAM	8	4	22.47	0-2	1
High	707.5	23095	3	16-QAM	8	7	22.45	0-2	1
	707.5	23095	3	16-QAM	15	0	22.36	0-2	1
	714.5	23165	3	QPSK	1	0	22.59	0	0
	714.5	23165	3	QPSK	1	7	22.66	0	0
	714.5	23165	3	QPSK	1	14	22.55	0	0
	714.5	23165	3	QPSK	8	0	22.53	0-1	0
	714.5	23165	3	QPSK	8	4	22.57	0-1	0
	714.5	23165	3	QPSK	8	7	22.51	0-1	0
	714.5	23165	3	QPSK	15	0	22.56	0-1	0
	714.5	23165	3	16-QAM	1	0	22.75	0-1	0
	714.5	23165	3	16-QAM	1	7	22.89	0-1	0
	714.5	23165	3	16-QAM	1	14	22.76	0-1	0
	714.5	23165	3	16-QAM	8	0	22.50	0-2	1
	714.5	23165	3	16-QAM	8	4	22.47	0-2	1
	714.5	23165	3	16-QAM	8	7	22.47	0-2	1
	714.5	23165	3	16-QAM	15	0	22.48	0-2	1

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 33 of 103	

Table 9-12
LTE Band 12 Conducted Powers - 1.4 MHz Bandwidth

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
699.7	23017	1.4	QPSK	1	0	22.63	0	0
699.7	23017	1.4	QPSK	1	2	22.70	0	0
699.7	23017	1.4	QPSK	1	5	22.59	0	0
699.7	23017	1.4	QPSK	3	0	22.61	0	0
699.7	23017	1.4	QPSK	3	2	22.50	0	0
699.7	23017	1.4	QPSK	3	3	22.64	0	0
699.7	23017	1.4	QPSK	6	0	22.60	0-1	0
699.7	23017	1.4	16-QAM	1	0	22.79	0-1	0
699.7	23017	1.4	16-QAM	1	2	22.92	0-1	0
699.7	23017	1.4	16-QAM	1	5	22.80	0-1	0
699.7	23017	1.4	16-QAM	3	0	22.58	0-1	0
699.7	23017	1.4	16-QAM	3	2	22.56	0-1	0
699.7	23017	1.4	16-QAM	3	3	22.55	0-1	0
699.7	23017	1.4	16-QAM	6	0	22.47	0-2	1
707.5	23095	1.4	QPSK	1	0	22.64	0	0
707.5	23095	1.4	QPSK	1	2	22.71	0	0
707.5	23095	1.4	QPSK	1	5	22.60	0	0
707.5	23095	1.4	QPSK	3	0	22.60	0	0
707.5	23095	1.4	QPSK	3	2	22.62	0	0
707.5	23095	1.4	QPSK	3	3	22.61	0	0
707.5	23095	1.4	QPSK	6	0	22.61	0-1	0
707.5	23095	1.4	16-QAM	1	0	22.80	0-1	0
707.5	23095	1.4	16-QAM	1	2	22.92	0-1	0
707.5	23095	1.4	16-QAM	1	5	22.81	0-1	0
707.5	23095	1.4	16-QAM	3	0	22.58	0-1	0
707.5	23095	1.4	16-QAM	3	2	22.54	0-1	0
707.5	23095	1.4	16-QAM	3	3	22.56	0-1	0
707.5	23095	1.4	16-QAM	6	0	22.48	0-2	1
715.3	23173	1.4	QPSK	1	0	22.62	0	0
715.3	23173	1.4	QPSK	1	2	22.69	0	0
715.3	23173	1.4	QPSK	1	5	22.58	0	0
715.3	23173	1.4	QPSK	3	0	22.53	0	0
715.3	23173	1.4	QPSK	3	2	22.60	0	0
715.3	23173	1.4	QPSK	3	3	22.54	0	0
715.3	23173	1.4	QPSK	6	0	22.51	0-1	0
715.3	23173	1.4	16-QAM	1	0	22.78	0-1	0
715.3	23173	1.4	16-QAM	1	2	22.92	0-1	0
715.3	23173	1.4	16-QAM	1	5	22.79	0-1	0
715.3	23173	1.4	16-QAM	3	0	22.52	0-1	0
715.3	23173	1.4	16-QAM	3	2	22.55	0-1	0
715.3	23173	1.4	16-QAM	3	3	22.51	0-1	0
715.3	23173	1.4	16-QAM	6	0	22.47	0-2	1

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 34 of 103	

9.3.3 LTE Band 5 (Cell)

Table 9-13
LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	836.5	20525	10	QPSK	1	0	24.43	0	0
	836.5	20525	10	QPSK	1	25	24.49	0	0
	836.5	20525	10	QPSK	1	49	24.48	0	0
	836.5	20525	10	QPSK	25	0	23.19	0-1	1
	836.5	20525	10	QPSK	25	12	23.00	0-1	1
	836.5	20525	10	QPSK	25	25	23.02	0-1	1
	836.5	20525	10	QPSK	50	0	23.12	0-1	1
	836.5	20525	10	16QAM	1	0	23.15	0-1	1
	836.5	20525	10	16QAM	1	25	23.30	0-1	1
	836.5	20525	10	16QAM	1	49	23.17	0-1	1
	836.5	20525	10	16QAM	25	0	22.34	0-2	2
	836.5	20525	10	16QAM	25	12	22.47	0-2	2
	836.5	20525	10	16QAM	25	25	22.14	0-2	2
	836.5	20525	10	16QAM	50	0	22.13	0-2	2

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 35 of 103

Table 9-14
LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	826.5	20425	5	QPSK	1	0	24.49	0	0
	826.5	20425	5	QPSK	1	12	24.49	0	0
	826.5	20425	5	QPSK	1	24	24.41	0	0
	826.5	20425	5	QPSK	12	0	23.41	0-1	1
	826.5	20425	5	QPSK	12	6	22.93	0-1	1
	826.5	20425	5	QPSK	12	13	23.14	0-1	1
	826.5	20425	5	QPSK	25	0	23.21	0-1	1
	826.5	20425	5	16-QAM	1	0	23.11	0-1	1
	826.5	20425	5	16-QAM	1	12	23.26	0-1	1
	826.5	20425	5	16-QAM	1	24	22.84	0-1	1
	826.5	20425	5	16-QAM	12	0	22.36	0-2	2
	826.5	20425	5	16-QAM	12	6	22.32	0-2	2
	826.5	20425	5	16-QAM	12	13	22.33	0-2	2
	826.5	20425	5	16-QAM	25	0	22.43	0-2	2
Mid	836.5	20525	5	QPSK	1	0	24.40	0	0
	836.5	20525	5	QPSK	1	12	24.30	0	0
	836.5	20525	5	QPSK	1	24	24.31	0	0
	836.5	20525	5	QPSK	12	0	23.30	0-1	1
	836.5	20525	5	QPSK	12	6	23.02	0-1	1
	836.5	20525	5	QPSK	12	13	23.01	0-1	1
	836.5	20525	5	QPSK	25	0	23.17	0-1	1
	836.5	20525	5	16-QAM	1	0	22.95	0-1	1
	836.5	20525	5	16-QAM	1	12	23.41	0-1	1
	836.5	20525	5	16-QAM	1	24	22.97	0-1	1
	836.5	20525	5	16-QAM	12	0	22.49	0-2	2
	836.5	20525	5	16-QAM	12	6	22.35	0-2	2
	836.5	20525	5	16-QAM	12	13	22.23	0-2	2
	836.5	20525	5	16-QAM	25	0	22.23	0-2	2
High	846.5	20625	5	QPSK	1	0	24.42	0	0
	846.5	20625	5	QPSK	1	12	24.27	0	0
	846.5	20625	5	QPSK	1	24	24.28	0	0
	846.5	20625	5	QPSK	12	0	23.47	0-1	1
	846.5	20625	5	QPSK	12	6	22.92	0-1	1
	846.5	20625	5	QPSK	12	13	22.89	0-1	1
	846.5	20625	5	QPSK	25	0	23.16	0-1	1
	846.5	20625	5	16-QAM	1	0	22.87	0-1	1
	846.5	20625	5	16-QAM	1	12	23.47	0-1	1
	846.5	20625	5	16-QAM	1	24	22.94	0-1	1
	846.5	20625	5	16-QAM	12	0	22.41	0-2	2
	846.5	20625	5	16-QAM	12	6	22.22	0-2	2
	846.5	20625	5	16-QAM	12	13	22.23	0-2	2
	846.5	20625	5	16-QAM	25	0	22.30	0-2	2

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 36 of 103	

Table 9-15
LTE Band 5 (Cell) Conducted Powers - 3 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	825.5	20415	3	QPSK	1	0	24.49	0	0
	825.5	20415	3	QPSK	1	7	24.43	0	0
	825.5	20415	3	QPSK	1	14	24.30	0	0
	825.5	20415	3	QPSK	8	0	23.43	0-1	1
	825.5	20415	3	QPSK	8	4	22.96	0-1	1
	825.5	20415	3	QPSK	8	7	23.21	0-1	1
	825.5	20415	3	QPSK	15	0	23.11	0-1	1
	825.5	20415	3	16-QAM	1	0	23.22	0-1	1
	825.5	20415	3	16-QAM	1	7	23.41	0-1	1
	825.5	20415	3	16-QAM	1	14	22.96	0-1	1
	825.5	20415	3	16-QAM	8	0	22.36	0-2	2
	825.5	20415	3	16-QAM	8	4	22.15	0-2	2
	825.5	20415	3	16-QAM	8	7	22.42	0-2	2
	825.5	20415	3	16-QAM	15	0	22.42	0-2	2
Mid	836.5	20525	3	QPSK	1	0	24.46	0	0
	836.5	20525	3	QPSK	1	7	24.42	0	0
	836.5	20525	3	QPSK	1	14	24.34	0	0
	836.5	20525	3	QPSK	8	0	23.42	0-1	1
	836.5	20525	3	QPSK	8	4	22.87	0-1	1
	836.5	20525	3	QPSK	8	7	23.03	0-1	1
	836.5	20525	3	QPSK	15	0	23.35	0-1	1
	836.5	20525	3	16-QAM	1	0	22.84	0-1	1
	836.5	20525	3	16-QAM	1	7	23.29	0-1	1
	836.5	20525	3	16-QAM	1	14	23.12	0-1	1
	836.5	20525	3	16-QAM	8	0	22.44	0-2	2
	836.5	20525	3	16-QAM	8	4	22.18	0-2	2
	836.5	20525	3	16-QAM	8	7	22.12	0-2	2
	836.5	20525	3	16-QAM	15	0	22.30	0-2	2
High	847.5	20635	3	QPSK	1	0	24.34	0	0
	847.5	20635	3	QPSK	1	7	24.15	0	0
	847.5	20635	3	QPSK	1	14	24.12	0	0
	847.5	20635	3	QPSK	8	0	23.31	0-1	1
	847.5	20635	3	QPSK	8	4	22.74	0-1	1
	847.5	20635	3	QPSK	8	7	23.00	0-1	1
	847.5	20635	3	QPSK	15	0	22.99	0-1	1
	847.5	20635	3	16-QAM	1	0	22.93	0-1	1
	847.5	20635	3	16-QAM	1	7	23.37	0-1	1
	847.5	20635	3	16-QAM	1	14	22.78	0-1	1
	847.5	20635	3	16-QAM	8	0	22.35	0-2	2
	847.5	20635	3	16-QAM	8	4	22.26	0-2	2
	847.5	20635	3	16-QAM	8	7	22.34	0-2	2
	847.5	20635	3	16-QAM	15	0	22.39	0-2	2

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 37 of 103

Table 9-16
LTE Band 5 (Cell) Conducted Powers -1.4 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	824.7	20407	1.4	QPSK	1	0	24.42	0	0
	824.7	20407	1.4	QPSK	1	2	24.23	0	0
	824.7	20407	1.4	QPSK	1	5	24.48	0	0
	824.7	20407	1.4	QPSK	3	0	24.40	0	0
	824.7	20407	1.4	QPSK	3	2	23.79	0	0
	824.7	20407	1.4	QPSK	3	3	24.39	0	0
	824.7	20407	1.4	QPSK	6	0	23.27	0-1	1
	824.7	20407	1.4	16-QAM	1	0	23.26	0-1	1
	824.7	20407	1.4	16-QAM	1	2	23.17	0-1	1
	824.7	20407	1.4	16-QAM	1	5	22.80	0-1	1
	824.7	20407	1.4	16-QAM	3	0	23.24	0-1	1
	824.7	20407	1.4	16-QAM	3	2	23.20	0-1	1
	824.7	20407	1.4	16-QAM	3	3	23.40	0-1	1
	824.7	20407	1.4	16-QAM	6	0	22.29	0-2	2
Mid	836.5	20525	1.4	QPSK	1	0	24.28	0	0
	836.5	20525	1.4	QPSK	1	2	24.14	0	0
	836.5	20525	1.4	QPSK	1	5	24.34	0	0
	836.5	20525	1.4	QPSK	3	0	24.37	0	0
	836.5	20525	1.4	QPSK	3	2	24.03	0	0
	836.5	20525	1.4	QPSK	3	3	24.11	0	0
	836.5	20525	1.4	QPSK	6	0	23.38	0-1	1
	836.5	20525	1.4	16-QAM	1	0	22.89	0-1	1
	836.5	20525	1.4	16-QAM	1	2	23.22	0-1	1
	836.5	20525	1.4	16-QAM	1	5	22.96	0-1	1
	836.5	20525	1.4	16-QAM	3	0	23.38	0-1	1
	836.5	20525	1.4	16-QAM	3	2	23.19	0-1	1
	836.5	20525	1.4	16-QAM	3	3	23.23	0-1	1
	836.5	20525	1.4	16-QAM	6	0	22.42	0-2	2
High	848.3	20643	1.4	QPSK	1	0	24.22	0	0
	848.3	20643	1.4	QPSK	1	2	24.00	0	0
	848.3	20643	1.4	QPSK	1	5	24.31	0	0
	848.3	20643	1.4	QPSK	3	0	24.27	0	0
	848.3	20643	1.4	QPSK	3	2	23.84	0	0
	848.3	20643	1.4	QPSK	3	3	23.89	0	0
	848.3	20643	1.4	QPSK	6	0	23.03	0-1	1
	848.3	20643	1.4	16-QAM	1	0	22.97	0-1	1
	848.3	20643	1.4	16-QAM	1	2	23.45	0-1	1
	848.3	20643	1.4	16-QAM	1	5	22.84	0-1	1
	848.3	20643	1.4	16-QAM	3	0	23.17	0-1	1
	848.3	20643	1.4	16-QAM	3	2	23.17	0-1	1
	848.3	20643	1.4	16-QAM	3	3	23.23	0-1	1
	848.3	20643	1.4	16-QAM	6	0	22.37	0-2	2

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 38 of 103	

9.3.4 LTE Band 5 – Representing Hotspot Mode Active

Table 9-17
LTE Band 5 Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	836.5	20525	10	QPSK	1	0	23.13	0	0
	836.5	20525	10	QPSK	1	25	23.10	0	0
	836.5	20525	10	QPSK	1	49	23.09	0	0
	836.5	20525	10	QPSK	25	0	23.02	0-1	0
	836.5	20525	10	QPSK	25	12	23.00	0-1	0
	836.5	20525	10	QPSK	25	25	23.03	0-1	0
	836.5	20525	10	QPSK	50	0	22.91	0-1	0
	836.5	20525	10	16QAM	1	0	23.44	0-1	0
	836.5	20525	10	16QAM	1	25	23.48	0-1	0
	836.5	20525	10	16QAM	1	49	23.39	0-1	0
	836.5	20525	10	16QAM	25	0	23.27	0-2	1
	836.5	20525	10	16QAM	25	12	23.40	0-2	1
	836.5	20525	10	16QAM	25	25	23.16	0-2	1
	836.5	20525	10	16QAM	50	0	23.04	0-2	1

Note: LTE Band 5 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 39 of 103

Table 9-18
LTE Band 5 Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	826.5	20425	5	QPSK	1	0	23.04	0	0
	826.5	20425	5	QPSK	1	12	23.00	0	0
	826.5	20425	5	QPSK	1	24	22.99	0	0
	826.5	20425	5	QPSK	12	0	22.92	0-1	0
	826.5	20425	5	QPSK	12	6	22.93	0-1	0
	826.5	20425	5	QPSK	12	13	22.93	0-1	0
	826.5	20425	5	QPSK	25	0	23.04	0-1	0
	826.5	20425	5	16-QAM	1	0	23.30	0-1	0
	826.5	20425	5	16-QAM	1	12	23.35	0-1	0
	826.5	20425	5	16-QAM	1	24	23.29	0-1	0
	826.5	20425	5	16-QAM	12	0	23.17	0-2	1
	826.5	20425	5	16-QAM	12	6	23.30	0-2	1
	826.5	20425	5	16-QAM	12	13	23.06	0-2	1
	826.5	20425	5	16-QAM	25	0	22.96	0-2	1
Mid	836.5	20525	5	QPSK	1	0	22.99	0	0
	836.5	20525	5	QPSK	1	12	22.96	0	0
	836.5	20525	5	QPSK	1	24	22.95	0	0
	836.5	20525	5	QPSK	12	0	22.88	0-1	0
	836.5	20525	5	QPSK	12	6	22.86	0-1	0
	836.5	20525	5	QPSK	12	13	22.89	0-1	0
	836.5	20525	5	QPSK	25	0	22.86	0-1	0
	836.5	20525	5	16-QAM	1	0	23.25	0-1	0
	836.5	20525	5	16-QAM	1	12	23.33	0-1	0
	836.5	20525	5	16-QAM	1	24	23.25	0-1	0
	836.5	20525	5	16-QAM	12	0	23.13	0-2	1
	836.5	20525	5	16-QAM	12	6	23.22	0-2	1
	836.5	20525	5	16-QAM	12	13	23.02	0-2	1
	836.5	20525	5	16-QAM	25	0	22.90	0-2	1
High	846.5	20625	5	QPSK	1	0	23.04	0	0
	846.5	20625	5	QPSK	1	12	23.09	0	0
	846.5	20625	5	QPSK	1	24	23.06	0	0
	846.5	20625	5	QPSK	12	0	22.89	0-1	0
	846.5	20625	5	QPSK	12	6	22.85	0-1	0
	846.5	20625	5	QPSK	12	13	22.90	0-1	0
	846.5	20625	5	QPSK	25	0	22.78	0-1	0
	846.5	20625	5	16-QAM	1	0	23.18	0-1	0
	846.5	20625	5	16-QAM	1	12	23.35	0-1	0
	846.5	20625	5	16-QAM	1	24	23.26	0-1	0
	846.5	20625	5	16-QAM	12	0	23.15	0-2	1
	846.5	20625	5	16-QAM	12	6	23.27	0-2	1
	846.5	20625	5	16-QAM	12	13	23.16	0-2	1
	846.5	20625	5	16-QAM	25	0	22.91	0-2	1

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 40 of 103	

Table 9-19
LTE Band 5 Conducted Powers - 3 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	825.5	20415	3	QPSK	1	0	23.11	0	0
	825.5	20415	3	QPSK	1	7	23.08	0	0
	825.5	20415	3	QPSK	1	14	23.07	0	0
	825.5	20415	3	QPSK	8	0	23.00	0-1	0
	825.5	20415	3	QPSK	8	4	22.98	0-1	0
	825.5	20415	3	QPSK	8	7	23.01	0-1	0
	825.5	20415	3	QPSK	15	0	23.12	0-1	0
	825.5	20415	3	16-QAM	1	0	23.42	0-1	0
	825.5	20415	3	16-QAM	1	7	23.46	0-1	0
	825.5	20415	3	16-QAM	1	14	23.37	0-1	0
	825.5	20415	3	16-QAM	8	0	23.25	0-2	1
	825.5	20415	3	16-QAM	8	4	23.38	0-2	1
	825.5	20415	3	16-QAM	8	7	23.14	0-2	1
	825.5	20415	3	16-QAM	15	0	23.02	0-2	1
Mid	836.5	20525	3	QPSK	1	0	23.07	0	0
	836.5	20525	3	QPSK	1	7	23.04	0	0
	836.5	20525	3	QPSK	1	14	23.03	0	0
	836.5	20525	3	QPSK	8	0	22.96	0-1	0
	836.5	20525	3	QPSK	8	4	22.94	0-1	0
	836.5	20525	3	QPSK	8	7	22.97	0-1	0
	836.5	20525	3	QPSK	15	0	22.94	0-1	0
	836.5	20525	3	16-QAM	1	0	23.38	0-1	0
	836.5	20525	3	16-QAM	1	7	23.42	0-1	0
	836.5	20525	3	16-QAM	1	14	23.33	0-1	0
	836.5	20525	3	16-QAM	8	0	23.24	0-2	1
	836.5	20525	3	16-QAM	8	4	23.26	0-2	1
	836.5	20525	3	16-QAM	8	7	23.10	0-2	1
	836.5	20525	3	16-QAM	15	0	22.98	0-2	1
High	847.5	20635	3	QPSK	1	0	23.08	0	0
	847.5	20635	3	QPSK	1	7	23.05	0	0
	847.5	20635	3	QPSK	1	14	23.04	0	0
	847.5	20635	3	QPSK	8	0	22.97	0-1	0
	847.5	20635	3	QPSK	8	4	22.95	0-1	0
	847.5	20635	3	QPSK	8	7	22.98	0-1	0
	847.5	20635	3	QPSK	15	0	22.86	0-1	0
	847.5	20635	3	16-QAM	1	0	23.39	0-1	0
	847.5	20635	3	16-QAM	1	7	23.43	0-1	0
	847.5	20635	3	16-QAM	1	14	23.34	0-1	0
	847.5	20635	3	16-QAM	8	0	23.27	0-2	1
	847.5	20635	3	16-QAM	8	4	23.35	0-2	1
	847.5	20635	3	16-QAM	8	7	23.24	0-2	1
	847.5	20635	3	16-QAM	15	0	22.99	0-2	1

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 41 of 103

Table 9-20
LTE Band 5 Conducted Powers - 1.4 MHz Bandwidth

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
824.7	20407	1.4	QPSK	1	0	23.10	0	0
824.7	20407	1.4	QPSK	1	2	23.06	0	0
824.7	20407	1.4	QPSK	1	5	23.05	0	0
824.7	20407	1.4	QPSK	3	0	22.98	0	0
824.7	20407	1.4	QPSK	3	2	22.99	0	0
824.7	20407	1.4	QPSK	3	3	22.99	0	0
824.7	20407	1.4	QPSK	6	0	23.10	0-1	0
824.7	20407	1.4	16-QAM	1	0	23.40	0-1	0
824.7	20407	1.4	16-QAM	1	2	23.41	0-1	0
824.7	20407	1.4	16-QAM	1	5	23.35	0-1	0
824.7	20407	1.4	16-QAM	3	0	23.23	0-1	0
824.7	20407	1.4	16-QAM	3	2	23.36	0-1	0
824.7	20407	1.4	16-QAM	3	3	23.12	0-1	0
824.7	20407	1.4	16-QAM	6	0	23.02	0-2	1
836.5	20525	1.4	QPSK	1	0	23.05	0	0
836.5	20525	1.4	QPSK	1	2	23.02	0	0
836.5	20525	1.4	QPSK	1	5	23.01	0	0
836.5	20525	1.4	QPSK	3	0	22.94	0	0
836.5	20525	1.4	QPSK	3	2	22.92	0	0
836.5	20525	1.4	QPSK	3	3	22.95	0	0
836.5	20525	1.4	QPSK	6	0	22.92	0-1	0
836.5	20525	1.4	16-QAM	1	0	23.31	0-1	0
836.5	20525	1.4	16-QAM	1	2	23.40	0-1	0
836.5	20525	1.4	16-QAM	1	5	23.31	0-1	0
836.5	20525	1.4	16-QAM	3	0	23.19	0-1	0
836.5	20525	1.4	16-QAM	3	2	23.28	0-1	0
836.5	20525	1.4	16-QAM	3	3	23.08	0-1	0
836.5	20525	1.4	16-QAM	6	0	22.96	0-2	1
848.3	20643	1.4	QPSK	1	0	23.10	0	0
848.3	20643	1.4	QPSK	1	2	23.15	0	0
848.3	20643	1.4	QPSK	1	5	23.12	0	0
848.3	20643	1.4	QPSK	3	0	22.95	0	0
848.3	20643	1.4	QPSK	3	2	22.93	0	0
848.3	20643	1.4	QPSK	3	3	22.96	0	0
848.3	20643	1.4	QPSK	6	0	22.84	0-1	0
848.3	20643	1.4	16-QAM	1	0	23.24	0-1	0
848.3	20643	1.4	16-QAM	1	2	23.41	0-1	0
848.3	20643	1.4	16-QAM	1	5	23.32	0-1	0
848.3	20643	1.4	16-QAM	3	0	23.18	0-1	0
848.3	20643	1.4	16-QAM	3	2	23.33	0-1	0
848.3	20643	1.4	16-QAM	3	3	23.22	0-1	0
848.3	20643	1.4	16-QAM	6	0	23.06	0-2	1

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 42 of 103	

9.3.5 LTE Band 4 (AWS)

Table 9-21

LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	1732.5	20175	20	QPSK	1	0	24.20	0	0
	1732.5	20175	20	QPSK	1	50	24.23	0	0
	1732.5	20175	20	QPSK	1	99	24.25	0	0
	1732.5	20175	20	QPSK	50	0	22.73	0-1	1
	1732.5	20175	20	QPSK	50	25	22.83	0-1	1
	1732.5	20175	20	QPSK	50	50	22.87	0-1	1
	1732.5	20175	20	QPSK	100	0	22.80	0-1	1
	1732.5	20175	20	16QAM	1	0	23.24	0-1	1
	1732.5	20175	20	16QAM	1	50	23.48	0-1	1
	1732.5	20175	20	16QAM	1	99	23.31	0-1	1
	1732.5	20175	20	16QAM	50	0	21.86	0-2	2
	1732.5	20175	20	16QAM	50	25	21.75	0-2	2
	1732.5	20175	20	16QAM	50	50	21.75	0-2	2
	1732.5	20175	20	16QAM	100	0	21.72	0-2	2

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 43 of 103

Table 9-22
LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1717.5	20025	15	QPSK	1	0	24.50	0	0
	1717.5	20025	15	QPSK	1	36	24.37	0	0
	1717.5	20025	15	QPSK	1	74	23.89	0	0
	1717.5	20025	15	QPSK	36	0	22.73	0-1	1
	1717.5	20025	15	QPSK	36	18	22.57	0-1	1
	1717.5	20025	15	QPSK	36	37	22.92	0-1	1
	1717.5	20025	15	QPSK	75	0	23.00	0-1	1
	1717.5	20025	15	16QAM	1	0	23.09	0-1	1
	1717.5	20025	15	16QAM	1	36	23.45	0-1	1
	1717.5	20025	15	16QAM	1	74	23.17	0-1	1
	1717.5	20025	15	16QAM	36	0	21.86	0-2	2
	1717.5	20025	15	16QAM	36	18	21.93	0-2	2
	1717.5	20025	15	16QAM	36	37	21.72	0-2	2
Mid	1732.5	20175	15	QPSK	1	0	24.33	0	0
	1732.5	20175	15	QPSK	1	36	24.43	0	0
	1732.5	20175	15	QPSK	1	74	24.05	0	0
	1732.5	20175	15	QPSK	36	0	22.61	0-1	1
	1732.5	20175	15	QPSK	36	18	22.67	0-1	1
	1732.5	20175	15	QPSK	36	37	22.88	0-1	1
	1732.5	20175	15	QPSK	75	0	22.97	0-1	1
	1732.5	20175	15	16QAM	1	0	23.15	0-1	1
	1732.5	20175	15	16QAM	1	36	23.30	0-1	1
	1732.5	20175	15	16QAM	1	74	23.27	0-1	1
	1732.5	20175	15	16QAM	36	0	21.80	0-2	2
	1732.5	20175	15	16QAM	36	18	21.79	0-2	2
	1732.5	20175	15	16QAM	36	37	21.89	0-2	2
	1732.5	20175	15	16QAM	75	0	21.52	0-2	2
High	1747.5	20325	15	QPSK	1	0	24.49	0	0
	1747.5	20325	15	QPSK	1	36	24.45	0	0
	1747.5	20325	15	QPSK	1	74	23.85	0	0
	1747.5	20325	15	QPSK	36	0	22.64	0-1	1
	1747.5	20325	15	QPSK	36	18	22.60	0-1	1
	1747.5	20325	15	QPSK	36	37	22.69	0-1	1
	1747.5	20325	15	QPSK	75	0	23.05	0-1	1
	1747.5	20325	15	16QAM	1	0	23.19	0-1	1
	1747.5	20325	15	16QAM	1	36	23.19	0-1	1
	1747.5	20325	15	16QAM	1	74	23.46	0-1	1
	1747.5	20325	15	16QAM	36	0	21.76	0-2	2
	1747.5	20325	15	16QAM	36	18	21.97	0-2	2
	1747.5	20325	15	16QAM	36	37	21.98	0-2	2
	1747.5	20325	15	16QAM	75	0	21.69	0-2	2

Table 9-23
LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1715	20000	10	QPSK	1	0	24.36	0	0
	1715	20000	10	QPSK	1	25	24.35	0	0
	1715	20000	10	QPSK	1	49	23.72	0	0
	1715	20000	10	QPSK	25	0	22.71	0-1	1
	1715	20000	10	QPSK	25	12	22.53	0-1	1
	1715	20000	10	QPSK	25	25	22.81	0-1	1
	1715	20000	10	QPSK	50	0	23.19	0-1	1
	1715	20000	10	16QAM	1	0	23.02	0-1	1
	1715	20000	10	16QAM	1	25	23.26	0-1	1
	1715	20000	10	16QAM	1	49	23.29	0-1	1
	1715	20000	10	16QAM	25	0	21.65	0-2	2
	1715	20000	10	16QAM	25	12	21.96	0-2	2
	1715	20000	10	16QAM	25	25	21.74	0-2	2
Mid	1715	20000	10	16QAM	50	0	21.59	0-2	2
	1732.5	20175	10	QPSK	1	0	24.19	0	0
	1732.5	20175	10	QPSK	1	25	24.39	0	0
	1732.5	20175	10	QPSK	1	49	23.91	0	0
	1732.5	20175	10	QPSK	25	0	22.81	0-1	1
	1732.5	20175	10	QPSK	25	12	22.51	0-1	1
	1732.5	20175	10	QPSK	25	25	22.69	0-1	1
	1732.5	20175	10	QPSK	50	0	23.01	0-1	1
	1732.5	20175	10	16QAM	1	0	23.08	0-1	1
	1732.5	20175	10	16QAM	1	25	23.43	0-1	1
	1732.5	20175	10	16QAM	1	49	23.39	0-1	1
	1732.5	20175	10	16QAM	25	0	21.83	0-2	2
	1732.5	20175	10	16QAM	25	12	21.99	0-2	2
	1732.5	20175	10	16QAM	25	25	21.90	0-2	2
High	1732.5	20175	10	16QAM	50	0	21.93	0-2	2
	1750	20350	10	QPSK	1	0	24.07	0	0
	1750	20350	10	QPSK	1	25	24.36	0	0
	1750	20350	10	QPSK	1	49	24.08	0	0
	1750	20350	10	QPSK	25	0	22.82	0-1	1
	1750	20350	10	QPSK	25	12	22.99	0-1	1
	1750	20350	10	QPSK	25	25	22.80	0-1	1
	1750	20350	10	QPSK	50	0	22.97	0-1	1
	1750	20350	10	16QAM	1	0	23.28	0-1	1
	1750	20350	10	16QAM	1	25	23.41	0-1	1
	1750	20350	10	16QAM	1	49	23.44	0-1	1
	1750	20350	10	16QAM	25	0	21.83	0-2	2
	1750	20350	10	16QAM	25	12	21.89	0-2	2
	1750	20350	10	16QAM	25	25	21.98	0-2	2
	1750	20350	10	16QAM	50	0	21.83	0-2	2

Table 9-24
LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1712.5	19975	5	QPSK	1	0	24.26	0	0
	1712.5	19975	5	QPSK	1	12	24.33	0	0
	1712.5	19975	5	QPSK	1	24	23.77	0	0
	1712.5	19975	5	QPSK	12	0	22.66	0-1	1
	1712.5	19975	5	QPSK	12	6	22.71	0-1	1
	1712.5	19975	5	QPSK	12	13	22.55	0-1	1
	1712.5	19975	5	QPSK	25	0	23.21	0-1	1
	1712.5	19975	5	16-QAM	1	0	23.10	0-1	1
	1712.5	19975	5	16-QAM	1	12	23.37	0-1	1
	1712.5	19975	5	16-QAM	1	24	23.40	0-1	1
	1712.5	19975	5	16-QAM	12	0	22.21	0-2	2
	1712.5	19975	5	16-QAM	12	6	21.72	0-2	2
Mid	1712.5	19975	5	16-QAM	12	13	21.84	0-2	2
	1712.5	19975	5	16-QAM	25	0	21.59	0-2	2
	1732.5	20175	5	QPSK	1	0	24.17	0	0
	1732.5	20175	5	QPSK	1	12	24.19	0	0
	1732.5	20175	5	QPSK	1	24	23.91	0	0
	1732.5	20175	5	QPSK	12	0	22.61	0-1	1
	1732.5	20175	5	QPSK	12	6	22.90	0-1	1
	1732.5	20175	5	QPSK	12	13	22.51	0-1	1
	1732.5	20175	5	QPSK	25	0	23.05	0-1	1
	1732.5	20175	5	16-QAM	1	0	23.06	0-1	1
	1732.5	20175	5	16-QAM	1	12	23.33	0-1	1
	1732.5	20175	5	16-QAM	1	24	23.47	0-1	1
High	1732.5	20175	5	16-QAM	12	0	22.03	0-2	2
	1732.5	20175	5	16-QAM	12	6	21.86	0-2	2
	1732.5	20175	5	16-QAM	12	13	21.80	0-2	2
	1732.5	20175	5	16-QAM	25	0	21.52	0-2	2
	1752.5	20375	5	QPSK	1	0	24.21	0	0
	1752.5	20375	5	QPSK	1	12	24.05	0	0
	1752.5	20375	5	QPSK	1	24	24.09	0	0
	1752.5	20375	5	QPSK	12	0	23.01	0-1	1
	1752.5	20375	5	QPSK	12	6	23.39	0-1	1
	1752.5	20375	5	QPSK	12	13	22.66	0-1	1
	1752.5	20375	5	QPSK	25	0	23.15	0-1	1
	1752.5	20375	5	16-QAM	1	0	23.08	0-1	1
	1752.5	20375	5	16-QAM	1	12	23.19	0-1	1
	1752.5	20375	5	16-QAM	1	24	23.40	0-1	1
	1752.5	20375	5	16-QAM	12	0	22.21	0-2	2
	1752.5	20375	5	16-QAM	12	6	21.99	0-2	2
	1752.5	20375	5	16-QAM	12	13	21.89	0-2	2
	1752.5	20375	5	16-QAM	25	0	21.55	0-2	2

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 46 of 103	

Table 9-25
LTE Band 4 (AWS) Conducted Powers - 3 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1711.5	19965	3	QPSK	1	0	24.22	0	0
	1711.5	19965	3	QPSK	1	7	24.18	0	0
	1711.5	19965	3	QPSK	1	14	23.66	0	0
	1711.5	19965	3	QPSK	8	0	22.67	0-1	1
	1711.5	19965	3	QPSK	8	4	22.58	0-1	1
	1711.5	19965	3	QPSK	8	7	22.67	0-1	1
	1711.5	19965	3	QPSK	15	0	23.11	0-1	1
	1711.5	19965	3	16-QAM	1	0	22.89	0-1	1
	1711.5	19965	3	16-QAM	1	7	23.29	0-1	1
	1711.5	19965	3	16-QAM	1	14	23.50	0-1	1
	1711.5	19965	3	16-QAM	8	0	21.68	0-2	2
	1711.5	19965	3	16-QAM	8	4	21.81	0-2	2
	1711.5	19965	3	16-QAM	8	7	21.76	0-2	2
Mid	1732.5	20175	3	QPSK	1	0	24.35	0	0
	1732.5	20175	3	QPSK	1	7	24.09	0	0
	1732.5	20175	3	QPSK	1	14	23.86	0	0
	1732.5	20175	3	QPSK	8	0	22.76	0-1	1
	1732.5	20175	3	QPSK	8	4	22.83	0-1	1
	1732.5	20175	3	QPSK	8	7	22.82	0-1	1
	1732.5	20175	3	QPSK	15	0	23.24	0-1	1
	1732.5	20175	3	16-QAM	1	0	23.05	0-1	1
	1732.5	20175	3	16-QAM	1	7	23.42	0-1	1
	1732.5	20175	3	16-QAM	1	14	23.25	0-1	1
	1732.5	20175	3	16-QAM	8	0	21.86	0-2	2
	1732.5	20175	3	16-QAM	8	4	21.85	0-2	2
	1732.5	20175	3	16-QAM	8	7	21.89	0-2	2
	1732.5	20175	3	16-QAM	15	0	21.67	0-2	2
High	1753.5	20385	3	QPSK	1	0	24.15	0	0
	1753.5	20385	3	QPSK	1	7	23.94	0	0
	1753.5	20385	3	QPSK	1	14	24.00	0	0
	1753.5	20385	3	QPSK	8	0	22.85	0-1	1
	1753.5	20385	3	QPSK	8	4	22.60	0-1	1
	1753.5	20385	3	QPSK	8	7	22.99	0-1	1
	1753.5	20385	3	QPSK	15	0	23.11	0-1	1
	1753.5	20385	3	16-QAM	1	0	23.18	0-1	1
	1753.5	20385	3	16-QAM	1	7	23.39	0-1	1
	1753.5	20385	3	16-QAM	1	14	23.33	0-1	1
	1753.5	20385	3	16-QAM	8	0	21.88	0-2	2
	1753.5	20385	3	16-QAM	8	4	21.84	0-2	2
	1753.5	20385	3	16-QAM	8	7	21.72	0-2	2
	1753.5	20385	3	16-QAM	15	0	21.53	0-2	2

Table 9-26
LTE Band 4 (AWS) Conducted Powers -1.4 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1710.7	19957	1.4	QPSK	1	0	24.35	0	0
	1710.7	19957	1.4	QPSK	1	2	23.96	0	0
	1710.7	19957	1.4	QPSK	1	5	23.72	0	0
	1710.7	19957	1.4	QPSK	3	0	23.83	0	0
	1710.7	19957	1.4	QPSK	3	2	23.71	0	0
	1710.7	19957	1.4	QPSK	3	3	23.53	0	0
	1710.7	19957	1.4	QPSK	6	0	23.13	0-1	1
	1710.7	19957	1.4	16-QAM	1	0	22.89	0-1	1
	1710.7	19957	1.4	16-QAM	1	2	23.31	0-1	1
	1710.7	19957	1.4	16-QAM	1	5	23.38	0-1	1
	1710.7	19957	1.4	16-QAM	3	0	22.83	0-1	1
	1710.7	19957	1.4	16-QAM	3	2	22.79	0-1	1
	1710.7	19957	1.4	16-QAM	3	3	22.86	0-1	1
Mid	1710.7	19957	1.4	16-QAM	6	0	21.81	0-2	2
	1732.5	20175	1.4	QPSK	1	0	24.38	0	0
	1732.5	20175	1.4	QPSK	1	2	23.95	0	0
	1732.5	20175	1.4	QPSK	1	5	23.66	0	0
	1732.5	20175	1.4	QPSK	3	0	23.94	0	0
	1732.5	20175	1.4	QPSK	3	2	23.72	0	0
	1732.5	20175	1.4	QPSK	3	3	23.60	0	0
	1732.5	20175	1.4	QPSK	6	0	23.20	0-1	1
	1732.5	20175	1.4	16-QAM	1	0	22.88	0-1	1
	1732.5	20175	1.4	16-QAM	1	2	23.40	0-1	1
	1732.5	20175	1.4	16-QAM	1	5	23.35	0-1	1
	1732.5	20175	1.4	16-QAM	3	0	22.81	0-1	1
	1732.5	20175	1.4	16-QAM	3	2	22.94	0-1	1
	1732.5	20175	1.4	16-QAM	3	3	22.94	0-1	1
High	1732.5	20175	1.4	16-QAM	6	0	21.64	0-2	2
	1754.3	20393	1.4	QPSK	1	0	24.35	0	0
	1754.3	20393	1.4	QPSK	1	2	23.99	0	0
	1754.3	20393	1.4	QPSK	1	5	23.67	0	0
	1754.3	20393	1.4	QPSK	3	0	24.09	0	0
	1754.3	20393	1.4	QPSK	3	2	23.54	0	0
	1754.3	20393	1.4	QPSK	3	3	23.68	0	0
	1754.3	20393	1.4	QPSK	6	0	23.05	0-1	1
	1754.3	20393	1.4	16-QAM	1	0	22.97	0-1	1
	1754.3	20393	1.4	16-QAM	1	2	23.40	0-1	1
	1754.3	20393	1.4	16-QAM	1	5	23.31	0-1	1
	1754.3	20393	1.4	16-QAM	3	0	22.68	0-1	1
	1754.3	20393	1.4	16-QAM	3	2	22.87	0-1	1
	1754.3	20393	1.4	16-QAM	3	3	22.78	0-1	1
	1754.3	20393	1.4	16-QAM	6	0	21.71	0-2	2

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 48 of 103	

9.3.6 LTE Band 4 (AWS) – Representing Hotspot Mode Active

Table 9-27

LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	1732.5	20175	20	QPSK	1	0	20.36	0	0
	1732.5	20175	20	QPSK	1	50	20.48	0	0
	1732.5	20175	20	QPSK	1	99	20.42	0	0
	1732.5	20175	20	QPSK	50	0	20.00	0-1	0
	1732.5	20175	20	QPSK	50	25	20.09	0-1	0
	1732.5	20175	20	QPSK	50	50	20.03	0-1	0
	1732.5	20175	20	QPSK	100	0	20.02	0-1	0
	1732.5	20175	20	16QAM	1	0	20.45	0-1	0
	1732.5	20175	20	16QAM	1	50	20.44	0-1	0
	1732.5	20175	20	16QAM	1	99	20.47	0-1	0
	1732.5	20175	20	16QAM	50	0	20.21	0-2	0
	1732.5	20175	20	16QAM	50	25	20.07	0-2	0
	1732.5	20175	20	16QAM	50	50	20.46	0-2	0
	1732.5	20175	20	16QAM	100	0	20.34	0-2	0

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 49 of 103

Table 9-28
LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1717.5	20025	15	QPSK	1	0	20.28	0	0
	1717.5	20025	15	QPSK	1	36	20.40	0	0
	1717.5	20025	15	QPSK	1	74	20.34	0	0
	1717.5	20025	15	QPSK	36	0	19.92	0-1	0
	1717.5	20025	15	QPSK	36	18	20.01	0-1	0
	1717.5	20025	15	QPSK	36	37	19.95	0-1	0
	1717.5	20025	15	QPSK	75	0	19.94	0-1	0
	1717.5	20025	15	16QAM	1	0	20.40	0-1	0
	1717.5	20025	15	16QAM	1	36	20.36	0-1	0
	1717.5	20025	15	16QAM	1	74	20.41	0-1	0
	1717.5	20025	15	16QAM	36	0	20.13	0-2	0
	1717.5	20025	15	16QAM	36	18	19.99	0-2	0
Mid	1717.5	20025	15	16QAM	36	37	20.40	0-2	0
	1717.5	20025	15	16QAM	75	0	20.26	0-2	0
	1732.5	20175	15	QPSK	1	0	20.33	0	0
	1732.5	20175	15	QPSK	1	36	20.45	0	0
	1732.5	20175	15	QPSK	1	74	20.39	0	0
	1732.5	20175	15	QPSK	36	0	19.97	0-1	0
	1732.5	20175	15	QPSK	36	18	20.06	0-1	0
	1732.5	20175	15	QPSK	36	37	20.00	0-1	0
	1732.5	20175	15	QPSK	75	0	19.99	0-1	0
	1732.5	20175	15	16QAM	1	0	20.45	0-1	0
	1732.5	20175	15	16QAM	1	36	20.41	0-1	0
	1732.5	20175	15	16QAM	1	74	20.46	0-1	0
High	1732.5	20175	15	16QAM	36	0	20.18	0-2	0
	1732.5	20175	15	16QAM	36	18	20.04	0-2	0
	1732.5	20175	15	16QAM	36	37	20.45	0-2	0
	1732.5	20175	15	16QAM	75	0	20.31	0-2	0
	1747.5	20325	15	QPSK	1	0	20.32	0	0
	1747.5	20325	15	QPSK	1	36	20.45	0	0
	1747.5	20325	15	QPSK	1	74	20.38	0	0
	1747.5	20325	15	QPSK	36	0	20.12	0-1	0
	1747.5	20325	15	QPSK	36	18	20.16	0-1	0
	1747.5	20325	15	QPSK	36	37	19.99	0-1	0
	1747.5	20325	15	QPSK	75	0	19.98	0-1	0
	1747.5	20325	15	16QAM	1	0	20.44	0-1	0
	1747.5	20325	15	16QAM	1	36	20.33	0-1	0
	1747.5	20325	15	16QAM	1	74	20.45	0-1	0
	1747.5	20325	15	16QAM	36	0	20.17	0-2	0
	1747.5	20325	15	16QAM	36	18	20.03	0-2	0
	1747.5	20325	15	16QAM	36	37	20.44	0-2	0
	1747.5	20325	15	16QAM	75	0	20.30	0-2	0

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 50 of 103	

Table 9-29
LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1715	20000	10	QPSK	1	0	20.21	0	0
	1715	20000	10	QPSK	1	25	20.33	0	0
	1715	20000	10	QPSK	1	49	20.27	0	0
	1715	20000	10	QPSK	25	0	19.85	0-1	0
	1715	20000	10	QPSK	25	12	19.94	0-1	0
	1715	20000	10	QPSK	25	25	19.88	0-1	0
	1715	20000	10	QPSK	50	0	19.87	0-1	0
	1715	20000	10	16QAM	1	0	20.33	0-1	0
	1715	20000	10	16QAM	1	25	20.29	0-1	0
	1715	20000	10	16QAM	1	49	20.34	0-1	0
	1715	20000	10	16QAM	25	0	20.06	0-2	0
	1715	20000	10	16QAM	25	12	20.10	0-2	0
	1715	20000	10	16QAM	25	25	20.33	0-2	0
	1715	20000	10	16QAM	50	0	20.19	0-2	0
Mid	1732.5	20175	10	QPSK	1	0	20.26	0	0
	1732.5	20175	10	QPSK	1	25	20.38	0	0
	1732.5	20175	10	QPSK	1	49	20.32	0	0
	1732.5	20175	10	QPSK	25	0	19.90	0-1	0
	1732.5	20175	10	QPSK	25	12	19.99	0-1	0
	1732.5	20175	10	QPSK	25	25	19.90	0-1	0
	1732.5	20175	10	QPSK	50	0	19.92	0-1	0
	1732.5	20175	10	16QAM	1	0	20.38	0-1	0
	1732.5	20175	10	16QAM	1	25	20.34	0-1	0
	1732.5	20175	10	16QAM	1	49	20.39	0-1	0
	1732.5	20175	10	16QAM	25	0	20.11	0-2	0
	1732.5	20175	10	16QAM	25	12	19.97	0-2	0
	1732.5	20175	10	16QAM	25	25	20.38	0-2	0
	1732.5	20175	10	16QAM	50	0	20.24	0-2	0
High	1750	20350	10	QPSK	1	0	20.25	0	0
	1750	20350	10	QPSK	1	25	20.38	0	0
	1750	20350	10	QPSK	1	49	20.31	0	0
	1750	20350	10	QPSK	25	0	20.05	0-1	0
	1750	20350	10	QPSK	25	12	20.09	0-1	0
	1750	20350	10	QPSK	25	25	19.92	0-1	0
	1750	20350	10	QPSK	50	0	19.91	0-1	0
	1750	20350	10	16QAM	1	0	20.37	0-1	0
	1750	20350	10	16QAM	1	25	20.26	0-1	0
	1750	20350	10	16QAM	1	49	20.38	0-1	0
	1750	20350	10	16QAM	25	0	20.10	0-2	0
	1750	20350	10	16QAM	25	12	20.11	0-2	0
	1750	20350	10	16QAM	25	25	20.37	0-2	0
	1750	20350	10	16QAM	50	0	20.23	0-2	0

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 51 of 103	

Table 9-30
LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1712.5	19975	5	QPSK	1	0	20.25	0	0
	1712.5	19975	5	QPSK	1	12	20.37	0	0
	1712.5	19975	5	QPSK	1	24	20.31	0	0
	1712.5	19975	5	QPSK	12	0	19.89	0-1	0
	1712.5	19975	5	QPSK	12	6	19.98	0-1	0
	1712.5	19975	5	QPSK	12	13	19.92	0-1	0
	1712.5	19975	5	QPSK	25	0	19.91	0-1	0
	1712.5	19975	5	16-QAM	1	0	20.37	0-1	0
	1712.5	19975	5	16-QAM	1	12	20.33	0-1	0
	1712.5	19975	5	16-QAM	1	24	20.38	0-1	0
	1712.5	19975	5	16-QAM	12	0	20.10	0-2	0
	1712.5	19975	5	16-QAM	12	6	19.96	0-2	0
	1712.5	19975	5	16-QAM	12	13	20.37	0-2	0
Mid	1732.5	20175	5	QPSK	1	0	20.30	0	0
	1732.5	20175	5	QPSK	1	12	20.42	0	0
	1732.5	20175	5	QPSK	1	24	20.36	0	0
	1732.5	20175	5	QPSK	12	0	19.94	0-1	0
	1732.5	20175	5	QPSK	12	6	20.03	0-1	0
	1732.5	20175	5	QPSK	12	13	19.97	0-1	0
	1732.5	20175	5	QPSK	25	0	19.96	0-1	0
	1732.5	20175	5	16-QAM	1	0	20.42	0-1	0
	1732.5	20175	5	16-QAM	1	12	20.38	0-1	0
	1732.5	20175	5	16-QAM	1	24	20.43	0-1	0
	1732.5	20175	5	16-QAM	12	0	20.15	0-2	0
	1732.5	20175	5	16-QAM	12	6	20.01	0-2	0
	1732.5	20175	5	16-QAM	12	13	20.42	0-2	0
High	1752.5	20375	5	QPSK	1	0	20.29	0	0
	1752.5	20375	5	QPSK	1	12	20.42	0	0
	1752.5	20375	5	QPSK	1	24	20.35	0	0
	1752.5	20375	5	QPSK	12	0	20.09	0-1	0
	1752.5	20375	5	QPSK	12	6	20.13	0-1	0
	1752.5	20375	5	QPSK	12	13	19.92	0-1	0
	1752.5	20375	5	QPSK	25	0	19.95	0-1	0
	1752.5	20375	5	16-QAM	1	0	20.41	0-1	0
	1752.5	20375	5	16-QAM	1	12	20.30	0-1	0
	1752.5	20375	5	16-QAM	1	24	20.42	0-1	0
	1752.5	20375	5	16-QAM	12	0	20.13	0-2	0
	1752.5	20375	5	16-QAM	12	6	20.01	0-2	0
	1752.5	20375	5	16-QAM	12	13	20.41	0-2	0
	1752.5	20375	5	16-QAM	25	0	20.27	0-2	0

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 52 of 103	

Table 9-31
LTE Band 4 (AWS) Conducted Powers - 3 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1711.5	19965	3	QPSK	1	0	20.23	0	0
	1711.5	19965	3	QPSK	1	7	20.35	0	0
	1711.5	19965	3	QPSK	1	14	20.29	0	0
	1711.5	19965	3	QPSK	8	0	19.87	0-1	0
	1711.5	19965	3	QPSK	8	4	19.96	0-1	0
	1711.5	19965	3	QPSK	8	7	19.90	0-1	0
	1711.5	19965	3	QPSK	15	0	19.89	0-1	0
	1711.5	19965	3	16-QAM	1	0	20.35	0-1	0
	1711.5	19965	3	16-QAM	1	7	20.31	0-1	0
	1711.5	19965	3	16-QAM	1	14	20.36	0-1	0
	1711.5	19965	3	16-QAM	8	0	20.08	0-2	0
	1711.5	19965	3	16-QAM	8	4	19.94	0-2	0
	1711.5	19965	3	16-QAM	8	7	20.35	0-2	0
Mid	1732.5	20175	3	QPSK	1	0	20.28	0	0
	1732.5	20175	3	QPSK	1	7	20.40	0	0
	1732.5	20175	3	QPSK	1	14	20.34	0	0
	1732.5	20175	3	QPSK	8	0	20.00	0-1	0
	1732.5	20175	3	QPSK	8	4	20.01	0-1	0
	1732.5	20175	3	QPSK	8	7	19.95	0-1	0
	1732.5	20175	3	QPSK	15	0	19.93	0-1	0
	1732.5	20175	3	16-QAM	1	0	20.40	0-1	0
	1732.5	20175	3	16-QAM	1	7	20.36	0-1	0
	1732.5	20175	3	16-QAM	1	14	20.41	0-1	0
	1732.5	20175	3	16-QAM	8	0	20.13	0-2	0
	1732.5	20175	3	16-QAM	8	4	19.99	0-2	0
	1732.5	20175	3	16-QAM	8	7	20.40	0-2	0
	1732.5	20175	3	16-QAM	15	0	20.26	0-2	0
High	1753.5	20385	3	QPSK	1	0	20.27	0	0
	1753.5	20385	3	QPSK	1	7	20.40	0	0
	1753.5	20385	3	QPSK	1	14	20.33	0	0
	1753.5	20385	3	QPSK	8	0	20.07	0-1	0
	1753.5	20385	3	QPSK	8	4	20.11	0-1	0
	1753.5	20385	3	QPSK	8	7	20.10	0-1	0
	1753.5	20385	3	QPSK	15	0	19.93	0-1	0
	1753.5	20385	3	16-QAM	1	0	20.39	0-1	0
	1753.5	20385	3	16-QAM	1	7	20.28	0-1	0
	1753.5	20385	3	16-QAM	1	14	20.41	0-1	0
	1753.5	20385	3	16-QAM	8	0	20.12	0-2	0
	1753.5	20385	3	16-QAM	8	4	19.98	0-2	0
	1753.5	20385	3	16-QAM	8	7	20.39	0-2	0
	1753.5	20385	3	16-QAM	15	0	20.25	0-2	0

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 53 of 103	

Table 9-32
LTE Band 4 (AWS) Conducted Powers -1.4 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1710.7	19957	1.4	QPSK	1	0	20.19	0	0
	1710.7	19957	1.4	QPSK	1	2	20.31	0	0
	1710.7	19957	1.4	QPSK	1	5	20.25	0	0
	1710.7	19957	1.4	QPSK	3	0	19.83	0	0
	1710.7	19957	1.4	QPSK	3	2	19.92	0	0
	1710.7	19957	1.4	QPSK	3	3	19.86	0	0
	1710.7	19957	1.4	QPSK	6	0	19.85	0-1	0
	1710.7	19957	1.4	16-QAM	1	0	20.10	0-1	0
	1710.7	19957	1.4	16-QAM	1	2	20.27	0-1	0
	1710.7	19957	1.4	16-QAM	1	5	20.32	0-1	0
	1710.7	19957	1.4	16-QAM	3	0	20.14	0-1	0
	1710.7	19957	1.4	16-QAM	3	2	20.04	0-1	0
	1710.7	19957	1.4	16-QAM	3	3	20.31	0-1	0
Mid	1710.7	19957	1.4	16-QAM	6	0	20.17	0-2	0
	1732.5	20175	1.4	QPSK	1	0	20.24	0	0
	1732.5	20175	1.4	QPSK	1	2	20.36	0	0
	1732.5	20175	1.4	QPSK	1	5	20.30	0	0
	1732.5	20175	1.4	QPSK	3	0	19.83	0	0
	1732.5	20175	1.4	QPSK	3	2	19.97	0	0
	1732.5	20175	1.4	QPSK	3	3	19.92	0	0
	1732.5	20175	1.4	QPSK	6	0	19.90	0-1	0
	1732.5	20175	1.4	16-QAM	1	0	20.36	0-1	0
	1732.5	20175	1.4	16-QAM	1	2	20.32	0-1	0
	1732.5	20175	1.4	16-QAM	1	5	20.37	0-1	0
	1732.5	20175	1.4	16-QAM	3	0	20.09	0-1	0
	1732.5	20175	1.4	16-QAM	3	2	19.95	0-1	0
	1732.5	20175	1.4	16-QAM	3	3	20.36	0-1	0
High	1732.5	20175	1.4	16-QAM	6	0	20.22	0-2	0
	1754.3	20393	1.4	QPSK	1	0	20.23	0	0
	1754.3	20393	1.4	QPSK	1	2	20.36	0	0
	1754.3	20393	1.4	QPSK	1	5	20.29	0	0
	1754.3	20393	1.4	QPSK	3	0	20.03	0	0
	1754.3	20393	1.4	QPSK	3	2	20.07	0	0
	1754.3	20393	1.4	QPSK	3	3	20.01	0	0
	1754.3	20393	1.4	QPSK	6	0	19.89	0-1	0
	1754.3	20393	1.4	16-QAM	1	0	20.35	0-1	0
	1754.3	20393	1.4	16-QAM	1	2	20.24	0-1	0
	1754.3	20393	1.4	16-QAM	1	5	20.36	0-1	0
	1754.3	20393	1.4	16-QAM	3	0	20.08	0-1	0
	1754.3	20393	1.4	16-QAM	3	2	20.01	0-1	0
	1754.3	20393	1.4	16-QAM	3	3	20.35	0-1	0
	1754.3	20393	1.4	16-QAM	6	0	20.21	0-2	0

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 54 of 103	

9.3.7 LTE Band 2 (PCS)

Table 9-33
LTE Band 2 (PCS) Conducted Powers - 20 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1860	18700	20	QPSK	1	0	24.41	0	0
	1860	18700	20	QPSK	1	50	24.44	0	0
	1860	18700	20	QPSK	1	99	24.25	0	0
	1860	18700	20	QPSK	50	0	23.04	0-1	1
	1860	18700	20	QPSK	50	25	23.05	0-1	1
	1860	18700	20	QPSK	50	50	22.99	0-1	1
	1860	18700	20	QPSK	100	0	22.98	0-1	1
	1860	18700	20	16QAM	1	0	23.32	0-1	1
	1860	18700	20	16QAM	1	50	23.38	0-1	1
	1860	18700	20	16QAM	1	99	23.15	0-1	1
	1860	18700	20	16QAM	50	0	21.96	0-2	2
	1860	18700	20	16QAM	50	25	21.98	0-2	2
	1860	18700	20	16QAM	50	50	21.90	0-2	2
	1860	18700	20	16QAM	100	0	21.94	0-2	2
Mid	1880.0	18900	20	QPSK	1	0	24.24	0	0
	1880.0	18900	20	QPSK	1	50	24.30	0	0
	1880.0	18900	20	QPSK	1	99	24.08	0	0
	1880.0	18900	20	QPSK	50	0	22.90	0-1	1
	1880.0	18900	20	QPSK	50	25	22.92	0-1	1
	1880.0	18900	20	QPSK	50	50	22.89	0-1	1
	1880.0	18900	20	QPSK	100	0	22.74	0-1	1
	1880.0	18900	20	16QAM	1	0	22.93	0-1	1
	1880.0	18900	20	16QAM	1	50	22.98	0-1	1
	1880.0	18900	20	16QAM	1	99	22.95	0-1	1
	1880.0	18900	20	16QAM	50	0	21.72	0-2	2
	1880.0	18900	20	16QAM	50	25	21.81	0-2	2
	1880.0	18900	20	16QAM	50	50	21.80	0-2	2
	1880.0	18900	20	16QAM	100	0	21.69	0-2	2
High	1900	19100	20	QPSK	1	0	24.47	0	0
	1900	19100	20	QPSK	1	50	24.49	0	0
	1900	19100	20	QPSK	1	99	24.42	0	0
	1900	19100	20	QPSK	50	0	23.09	0-1	1
	1900	19100	20	QPSK	50	25	23.13	0-1	1
	1900	19100	20	QPSK	50	50	23.09	0-1	1
	1900	19100	20	QPSK	100	0	23.04	0-1	1
	1900	19100	20	16QAM	1	0	23.10	0-1	1
	1900	19100	20	16QAM	1	50	23.19	0-1	1
	1900	19100	20	16QAM	1	99	23.04	0-1	1
	1900	19100	20	16QAM	50	0	21.81	0-2	2
	1900	19100	20	16QAM	50	25	21.84	0-2	2
	1900	19100	20	16QAM	50	50	21.81	0-2	2
	1900	19100	20	16QAM	100	0	21.64	0-2	2

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 55 of 103	

Table 9-34
LTE Band 2 (PCS) Conducted Powers - 15 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1857.5	18675	15	QPSK	1	0	24.34	0	0
	1857.5	18675	15	QPSK	1	36	24.26	0	0
	1857.5	18675	15	QPSK	1	74	24.32	0	0
	1857.5	18675	15	QPSK	36	0	23.15	0-1	1
	1857.5	18675	15	QPSK	36	18	22.96	0-1	1
	1857.5	18675	15	QPSK	36	37	22.95	0-1	1
	1857.5	18675	15	QPSK	75	0	23.04	0-1	1
	1857.5	18675	15	16QAM	1	0	23.36	0-1	1
	1857.5	18675	15	16QAM	1	36	23.46	0-1	1
	1857.5	18675	15	16QAM	1	74	23.09	0-1	1
	1857.5	18675	15	16QAM	36	0	22.10	0-2	2
	1857.5	18675	15	16QAM	36	18	22.10	0-2	2
	1857.5	18675	15	16QAM	36	37	21.80	0-2	2
Mid	1857.5	18675	15	16QAM	75	0	21.83	0-2	2
	1880.0	18900	15	QPSK	1	0	24.42	0	0
	1880.0	18900	15	QPSK	1	36	24.24	0	0
	1880.0	18900	15	QPSK	1	74	24.13	0	0
	1880.0	18900	15	QPSK	36	0	23.02	0-1	1
	1880.0	18900	15	QPSK	36	18	22.82	0-1	1
	1880.0	18900	15	QPSK	36	37	22.70	0-1	1
	1880.0	18900	15	QPSK	75	0	22.78	0-1	1
	1880.0	18900	15	16QAM	1	0	22.85	0-1	1
	1880.0	18900	15	16QAM	1	36	23.02	0-1	1
	1880.0	18900	15	16QAM	1	74	22.86	0-1	1
	1880.0	18900	15	16QAM	36	0	21.70	0-2	2
	1880.0	18900	15	16QAM	36	18	21.85	0-2	2
	1880.0	18900	15	16QAM	36	37	21.98	0-2	2
High	1880.0	18900	15	16QAM	75	0	21.65	0-2	2
	1902.5	19125	15	QPSK	1	0	24.35	0	0
	1902.5	19125	15	QPSK	1	36	24.49	0	0
	1902.5	19125	15	QPSK	1	74	24.27	0	0
	1902.5	19125	15	QPSK	36	0	23.16	0-1	1
	1902.5	19125	15	QPSK	36	18	23.21	0-1	1
	1902.5	19125	15	QPSK	36	37	23.06	0-1	1
	1902.5	19125	15	QPSK	75	0	22.97	0-1	1
	1902.5	19125	15	16QAM	1	0	23.07	0-1	1
	1902.5	19125	15	16QAM	1	36	23.05	0-1	1
	1902.5	19125	15	16QAM	1	74	22.92	0-1	1
	1902.5	19125	15	16QAM	36	0	21.90	0-2	2
	1902.5	19125	15	16QAM	36	18	21.67	0-2	2
	1902.5	19125	15	16QAM	36	37	21.93	0-2	2
	1902.5	19125	15	16QAM	75	0	21.68	0-2	2

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 56 of 103	

Table 9-35
LTE Band 2 (PCS) Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1855	18650	10	QPSK	1	0	24.29	0	0
	1855	18650	10	QPSK	1	25	24.33	0	0
	1855	18650	10	QPSK	1	49	24.22	0	0
	1855	18650	10	QPSK	25	0	23.25	0-1	1
	1855	18650	10	QPSK	25	12	23.01	0-1	1
	1855	18650	10	QPSK	25	25	23.00	0-1	1
	1855	18650	10	QPSK	50	0	22.96	0-1	1
	1855	18650	10	16QAM	1	0	23.32	0-1	1
	1855	18650	10	16QAM	1	25	23.37	0-1	1
	1855	18650	10	16QAM	1	49	23.14	0-1	1
	1855	18650	10	16QAM	25	0	22.27	0-2	2
	1855	18650	10	16QAM	25	12	22.28	0-2	2
	1855	18650	10	16QAM	25	25	21.79	0-2	2
	1855	18650	10	16QAM	50	0	22.01	0-2	2
Mid	1880.0	18900	10	QPSK	1	0	24.43	0	0
	1880.0	18900	10	QPSK	1	25	24.39	0	0
	1880.0	18900	10	QPSK	1	49	24.00	0	0
	1880.0	18900	10	QPSK	25	0	23.08	0-1	1
	1880.0	18900	10	QPSK	25	12	22.82	0-1	1
	1880.0	18900	10	QPSK	25	25	22.75	0-1	1
	1880.0	18900	10	QPSK	50	0	22.68	0-1	1
	1880.0	18900	10	16QAM	1	0	22.99	0-1	1
	1880.0	18900	10	16QAM	1	25	23.15	0-1	1
	1880.0	18900	10	16QAM	1	49	22.93	0-1	1
	1880.0	18900	10	16QAM	25	0	21.54	0-2	2
	1880.0	18900	10	16QAM	25	12	21.70	0-2	2
	1880.0	18900	10	16QAM	25	25	22.10	0-2	2
	1880.0	18900	10	16QAM	50	0	21.59	0-2	2
High	1905	19150	10	QPSK	1	0	24.34	0	0
	1905	19150	10	QPSK	1	25	24.33	0	0
	1905	19150	10	QPSK	1	49	24.13	0	0
	1905	19150	10	QPSK	25	0	23.23	0-1	1
	1905	19150	10	QPSK	25	12	23.20	0-1	1
	1905	19150	10	QPSK	25	25	22.96	0-1	1
	1905	19150	10	QPSK	50	0	23.00	0-1	1
	1905	19150	10	16QAM	1	0	23.13	0-1	1
	1905	19150	10	16QAM	1	25	23.07	0-1	1
	1905	19150	10	16QAM	1	49	22.81	0-1	1
	1905	19150	10	16QAM	25	0	21.72	0-2	2
	1905	19150	10	16QAM	25	12	21.60	0-2	2
	1905	19150	10	16QAM	25	25	21.99	0-2	2
	1905	19150	10	16QAM	50	0	21.61	0-2	2

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 57 of 103

Table 9-36
LTE Band 2 (PCS) Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1852.5	18625	5	QPSK	1	0	24.26	0	0
	1852.5	18625	5	QPSK	1	12	24.37	0	0
	1852.5	18625	5	QPSK	1	24	24.30	0	0
	1852.5	18625	5	QPSK	12	0	23.12	0-1	1
	1852.5	18625	5	QPSK	12	6	22.86	0-1	1
	1852.5	18625	5	QPSK	12	13	23.14	0-1	1
	1852.5	18625	5	QPSK	25	0	23.03	0-1	1
	1852.5	18625	5	16-QAM	1	0	23.36	0-1	1
	1852.5	18625	5	16-QAM	1	12	23.41	0-1	1
	1852.5	18625	5	16-QAM	1	24	23.25	0-1	1
	1852.5	18625	5	16-QAM	12	0	22.28	0-2	2
	1852.5	18625	5	16-QAM	12	6	22.47	0-2	2
Mid	1852.5	18625	5	16-QAM	12	13	21.84	0-2	2
	1852.5	18625	5	16-QAM	25	0	22.18	0-2	2
	1880.0	18900	5	QPSK	1	0	24.40	0	0
	1880.0	18900	5	QPSK	1	12	24.34	0	0
	1880.0	18900	5	QPSK	1	24	23.95	0	0
	1880.0	18900	5	QPSK	12	0	22.94	0-1	1
	1880.0	18900	5	QPSK	12	6	22.91	0-1	1
	1880.0	18900	5	QPSK	12	13	22.71	0-1	1
	1880.0	18900	5	QPSK	25	0	22.58	0-1	1
	1880.0	18900	5	16-QAM	1	0	22.89	0-1	1
	1880.0	18900	5	16-QAM	1	12	23.23	0-1	1
	1880.0	18900	5	16-QAM	1	24	22.89	0-1	1
High	1880.0	18900	5	16-QAM	12	0	21.67	0-2	2
	1880.0	18900	5	16-QAM	12	6	21.90	0-2	2
	1880.0	18900	5	16-QAM	12	13	22.06	0-2	2
	1880.0	18900	5	16-QAM	25	0	21.66	0-2	2
	1907.5	19175	5	QPSK	1	0	24.16	0	0
	1907.5	19175	5	QPSK	1	12	24.39	0	0
	1907.5	19175	5	QPSK	1	24	23.93	0	0
	1907.5	19175	5	QPSK	12	0	23.42	0-1	1
	1907.5	19175	5	QPSK	12	6	23.07	0-1	1
	1907.5	19175	5	QPSK	12	13	22.80	0-1	1
	1907.5	19175	5	QPSK	25	0	22.86	0-1	1
	1907.5	19175	5	16-QAM	1	0	23.08	0-1	1
	1907.5	19175	5	16-QAM	1	12	23.00	0-1	1
	1907.5	19175	5	16-QAM	1	24	22.62	0-1	1
	1907.5	19175	5	16-QAM	12	0	21.81	0-2	2
	1907.5	19175	5	16-QAM	12	6	21.61	0-2	2
	1907.5	19175	5	16-QAM	12	13	21.96	0-2	2
	1907.5	19175	5	16-QAM	25	0	21.77	0-2	2

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 58 of 103

Table 9-37
LTE Band 2 (PCS) Conducted Powers - 3 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1851.5	18615	3	QPSK	1	0	24.13	0	0
	1851.5	18615	3	QPSK	1	7	24.20	0	0
	1851.5	18615	3	QPSK	1	14	24.36	0	0
	1851.5	18615	3	QPSK	8	0	23.22	0-1	1
	1851.5	18615	3	QPSK	8	4	23.05	0-1	1
	1851.5	18615	3	QPSK	8	7	23.02	0-1	1
	1851.5	18615	3	QPSK	15	0	23.08	0-1	1
	1851.5	18615	3	16-QAM	1	0	23.39	0-1	1
	1851.5	18615	3	16-QAM	1	7	23.35	0-1	1
	1851.5	18615	3	16-QAM	1	14	23.25	0-1	1
	1851.5	18615	3	16-QAM	8	0	22.08	0-2	2
	1851.5	18615	3	16-QAM	8	4	22.40	0-2	2
	1851.5	18615	3	16-QAM	8	7	21.83	0-2	2
Mid	1880.0	18900	3	QPSK	1	0	24.25	0	0
	1880.0	18900	3	QPSK	1	7	24.49	0	0
	1880.0	18900	3	QPSK	1	14	24.01	0	0
	1880.0	18900	3	QPSK	8	0	22.80	0-1	1
	1880.0	18900	3	QPSK	8	4	22.94	0-1	1
	1880.0	18900	3	QPSK	8	7	22.76	0-1	1
	1880.0	18900	3	QPSK	15	0	22.71	0-1	1
	1880.0	18900	3	16-QAM	1	0	22.75	0-1	1
	1880.0	18900	3	16-QAM	1	7	23.13	0-1	1
	1880.0	18900	3	16-QAM	1	14	22.79	0-1	1
	1880.0	18900	3	16-QAM	8	0	21.75	0-2	2
	1880.0	18900	3	16-QAM	8	4	21.74	0-2	2
	1880.0	18900	3	16-QAM	8	7	21.96	0-2	2
	1880.0	18900	3	16-QAM	15	0	21.72	0-2	2
High	1908.5	19185	3	QPSK	1	0	24.33	0	0
	1908.5	19185	3	QPSK	1	7	24.40	0	0
	1908.5	19185	3	QPSK	1	14	23.79	0	0
	1908.5	19185	3	QPSK	8	0	23.29	0-1	1
	1908.5	19185	3	QPSK	8	4	23.00	0-1	1
	1908.5	19185	3	QPSK	8	7	22.71	0-1	1
	1908.5	19185	3	QPSK	15	0	22.93	0-1	1
	1908.5	19185	3	16-QAM	1	0	23.22	0-1	1
	1908.5	19185	3	16-QAM	1	7	22.92	0-1	1
	1908.5	19185	3	16-QAM	1	14	22.79	0-1	1
	1908.5	19185	3	16-QAM	8	0	22.01	0-2	2
	1908.5	19185	3	16-QAM	8	4	21.69	0-2	2
	1908.5	19185	3	16-QAM	8	7	22.02	0-2	2
	1908.5	19185	3	16-QAM	15	0	21.97	0-2	2

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 59 of 103

Table 9-38
LTE Band 2 (PCS) Conducted Powers -1.4 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1850.7	18607	1.4	QPSK	1	0	24.26	0	0
	1850.7	18607	1.4	QPSK	1	2	24.32	0	0
	1850.7	18607	1.4	QPSK	1	5	24.36	0	0
	1850.7	18607	1.4	QPSK	3	0	24.06	0	0
	1850.7	18607	1.4	QPSK	3	2	24.06	0	0
	1850.7	18607	1.4	QPSK	3	3	24.16	0	0
	1850.7	18607	1.4	QPSK	6	0	23.16	0-1	1
	1850.7	18607	1.4	16-QAM	1	0	23.46	0-1	1
	1850.7	18607	1.4	16-QAM	1	2	23.27	0-1	1
	1850.7	18607	1.4	16-QAM	1	5	23.28	0-1	1
	1850.7	18607	1.4	16-QAM	3	0	23.23	0-1	1
	1850.7	18607	1.4	16-QAM	3	2	23.18	0-1	1
Mid	1850.7	18607	1.4	16-QAM	3	3	22.91	0-1	1
	1850.7	18607	1.4	16-QAM	6	0	22.23	0-2	2
	1880.0	18900	1.4	QPSK	1	0	24.26	0	0
	1880.0	18900	1.4	QPSK	1	2	24.43	0	0
	1880.0	18900	1.4	QPSK	1	5	23.88	0	0
	1880.0	18900	1.4	QPSK	3	0	23.93	0	0
	1880.0	18900	1.4	QPSK	3	2	23.82	0	0
	1880.0	18900	1.4	QPSK	3	3	23.71	0	0
	1880.0	18900	1.4	QPSK	6	0	22.75	0-1	1
	1880.0	18900	1.4	16-QAM	1	0	22.86	0-1	1
	1880.0	18900	1.4	16-QAM	1	2	23.25	0-1	1
	1880.0	18900	1.4	16-QAM	1	5	22.88	0-1	1
High	1880.0	18900	1.4	16-QAM	3	0	22.80	0-1	1
	1880.0	18900	1.4	16-QAM	3	2	22.89	0-1	1
	1880.0	18900	1.4	16-QAM	3	3	22.92	0-1	1
	1880.0	18900	1.4	16-QAM	6	0	21.81	0-2	2
	1909.3	19193	1.4	QPSK	1	0	24.24	0	0
	1909.3	19193	1.4	QPSK	1	2	24.40	0	0
	1909.3	19193	1.4	QPSK	1	5	23.94	0	0
	1909.3	19193	1.4	QPSK	3	0	24.06	0	0
	1909.3	19193	1.4	QPSK	3	2	23.97	0	0
	1909.3	19193	1.4	QPSK	3	3	23.54	0	0
	1909.3	19193	1.4	QPSK	6	0	23.12	0-1	1
	1909.3	19193	1.4	16-QAM	1	0	23.42	0-1	1
	1909.3	19193	1.4	16-QAM	1	2	22.89	0-1	1
	1909.3	19193	1.4	16-QAM	1	5	22.99	0-1	1
	1909.3	19193	1.4	16-QAM	3	0	22.93	0-1	1
	1909.3	19193	1.4	16-QAM	3	2	22.88	0-1	1
	1909.3	19193	1.4	16-QAM	3	3	22.90	0-1	1
	1909.3	19193	1.4	16-QAM	6	0	22.07	0-2	2

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 60 of 103

9.3.8 LTE Band 2 (PCS) – Representing Hotspot Mode Active

Table 9-39
LTE Band 2 (PCS) Conducted Powers - 20 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1860	18700	20	QPSK	1	0	20.75	0	0
	1860	18700	20	QPSK	1	50	20.54	0	0
	1860	18700	20	QPSK	1	99	20.79	0	0
	1860	18700	20	QPSK	50	0	20.64	0-1	0
	1860	18700	20	QPSK	50	25	20.67	0-1	0
	1860	18700	20	QPSK	50	50	20.63	0-1	0
	1860	18700	20	QPSK	100	0	20.63	0-1	0
	1860	18700	20	16QAM	1	0	20.74	0-1	0
	1860	18700	20	16QAM	1	50	20.70	0-1	0
	1860	18700	20	16QAM	1	99	20.66	0-1	0
	1860	18700	20	16QAM	50	0	20.69	0-2	0
	1860	18700	20	16QAM	50	25	20.57	0-2	0
	1860	18700	20	16QAM	50	50	20.98	0-2	0
	1860	18700	20	16QAM	100	0	20.77	0-2	0
Mid	1880.0	18900	20	QPSK	1	0	20.74	0	0
	1880.0	18900	20	QPSK	1	50	20.69	0	0
	1880.0	18900	20	QPSK	1	99	20.68	0	0
	1880.0	18900	20	QPSK	50	0	20.63	0-1	0
	1880.0	18900	20	QPSK	50	25	20.56	0-1	0
	1880.0	18900	20	QPSK	50	50	20.51	0-1	0
	1880.0	18900	20	QPSK	100	0	20.54	0-1	0
	1880.0	18900	20	16QAM	1	0	20.93	0-1	0
	1880.0	18900	20	16QAM	1	50	20.99	0-1	0
	1880.0	18900	20	16QAM	1	99	21.07	0-1	0
	1880.0	18900	20	16QAM	50	0	20.53	0-2	0
	1880.0	18900	20	16QAM	50	25	20.57	0-2	0
	1880.0	18900	20	16QAM	50	50	20.53	0-2	0
	1880.0	18900	20	16QAM	100	0	20.56	0-2	0
High	1900	19100	20	QPSK	1	0	20.77	0	0
	1900	19100	20	QPSK	1	50	20.81	0	0
	1900	19100	20	QPSK	1	99	20.76	0	0
	1900	19100	20	QPSK	50	0	20.58	0-1	0
	1900	19100	20	QPSK	50	25	20.61	0-1	0
	1900	19100	20	QPSK	50	50	20.69	0-1	0
	1900	19100	20	QPSK	100	0	20.64	0-1	0
	1900	19100	20	16QAM	1	0	20.73	0-1	0
	1900	19100	20	16QAM	1	50	20.69	0-1	0
	1900	19100	20	16QAM	1	99	21.00	0-1	0
	1900	19100	20	16QAM	50	0	20.53	0-2	0
	1900	19100	20	16QAM	50	25	20.57	0-2	0
	1900	19100	20	16QAM	50	50	20.54	0-2	0
	1900	19100	20	16QAM	100	0	20.55	0-2	0

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 61 of 103

Table 9-40
LTE Band 2 (PCS) Conducted Powers - 15 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1857.5	18675	15	QPSK	1	0	20.70	0	0
	1857.5	18675	15	QPSK	1	36	20.63	0	0
	1857.5	18675	15	QPSK	1	74	20.74	0	0
	1857.5	18675	15	QPSK	36	0	20.59	0-1	0
	1857.5	18675	15	QPSK	36	18	20.62	0-1	0
	1857.5	18675	15	QPSK	36	37	20.58	0-1	0
	1857.5	18675	15	QPSK	75	0	20.58	0-1	0
	1857.5	18675	15	16QAM	1	0	20.69	0-1	0
	1857.5	18675	15	16QAM	1	36	20.65	0-1	0
	1857.5	18675	15	16QAM	1	74	20.61	0-1	0
	1857.5	18675	15	16QAM	36	0	20.64	0-2	0
	1857.5	18675	15	16QAM	36	18	20.52	0-2	0
Mid	1857.5	18675	15	16QAM	36	37	20.93	0-2	0
	1857.5	18675	15	16QAM	75	0	20.72	0-2	0
	1880.0	18900	15	QPSK	1	0	20.69	0	0
	1880.0	18900	15	QPSK	1	36	20.64	0	0
	1880.0	18900	15	QPSK	1	74	20.74	0	0
	1880.0	18900	15	QPSK	36	0	20.58	0-1	0
	1880.0	18900	15	QPSK	36	18	20.51	0-1	0
	1880.0	18900	15	QPSK	36	37	20.58	0-1	0
	1880.0	18900	15	QPSK	75	0	20.49	0-1	0
	1880.0	18900	15	16QAM	1	0	20.88	0-1	0
	1880.0	18900	15	16QAM	1	36	20.94	0-1	0
	1880.0	18900	15	16QAM	1	74	21.02	0-1	0
High	1880.0	18900	15	16QAM	36	0	20.48	0-2	0
	1880.0	18900	15	16QAM	36	18	20.52	0-2	0
	1880.0	18900	15	16QAM	36	37	20.48	0-2	0
	1880.0	18900	15	16QAM	75	0	20.51	0-2	0
	1902.5	19125	15	QPSK	1	0	20.72	0	0
	1902.5	19125	15	QPSK	1	36	20.76	0	0
	1902.5	19125	15	QPSK	1	74	20.71	0	0
	1902.5	19125	15	QPSK	36	0	20.53	0-1	0
	1902.5	19125	15	QPSK	36	18	20.56	0-1	0
	1902.5	19125	15	QPSK	36	37	20.64	0-1	0
	1902.5	19125	15	QPSK	75	0	20.59	0-1	0
	1902.5	19125	15	16QAM	1	0	20.68	0-1	0
	1902.5	19125	15	16QAM	1	36	20.64	0-1	0
	1902.5	19125	15	16QAM	1	74	20.95	0-1	0
	1902.5	19125	15	16QAM	36	0	20.64	0-2	0
	1902.5	19125	15	16QAM	36	18	20.52	0-2	0
	1902.5	19125	15	16QAM	36	37	20.51	0-2	0
	1902.5	19125	15	16QAM	75	0	20.50	0-2	0

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 62 of 103	

Table 9-41
LTE Band 2 (PCS) Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1855	18650	10	QPSK	1	0	20.71	0	0
	1855	18650	10	QPSK	1	25	20.50	0	0
	1855	18650	10	QPSK	1	49	20.75	0	0
	1855	18650	10	QPSK	25	0	20.60	0-1	0
	1855	18650	10	QPSK	25	12	20.63	0-1	0
	1855	18650	10	QPSK	25	25	20.59	0-1	0
	1855	18650	10	QPSK	50	0	20.59	0-1	0
	1855	18650	10	16QAM	1	0	20.70	0-1	0
	1855	18650	10	16QAM	1	25	20.66	0-1	0
	1855	18650	10	16QAM	1	49	20.62	0-1	0
	1855	18650	10	16QAM	25	0	20.65	0-2	0
	1855	18650	10	16QAM	25	12	20.53	0-2	0
Mid	1855	18650	10	16QAM	25	25	20.94	0-2	0
	1855	18650	10	16QAM	50	0	20.73	0-2	0
	1880.0	18900	10	QPSK	1	0	20.70	0	0
	1880.0	18900	10	QPSK	1	25	20.65	0	0
	1880.0	18900	10	QPSK	1	49	20.64	0	0
	1880.0	18900	10	QPSK	25	0	20.59	0-1	0
	1880.0	18900	10	QPSK	25	12	20.52	0-1	0
	1880.0	18900	10	QPSK	25	25	20.47	0-1	0
	1880.0	18900	10	QPSK	50	0	20.50	0-1	0
	1880.0	18900	10	16QAM	1	0	20.89	0-1	0
	1880.0	18900	10	16QAM	1	25	20.95	0-1	0
	1880.0	18900	10	16QAM	1	49	21.03	0-1	0
High	1880.0	18900	10	16QAM	25	0	20.49	0-2	0
	1880.0	18900	10	16QAM	25	12	20.53	0-2	0
	1880.0	18900	10	16QAM	25	25	20.49	0-2	0
	1880.0	18900	10	16QAM	50	0	20.52	0-2	0
	1905	19150	10	QPSK	1	0	20.73	0	0
	1905	19150	10	QPSK	1	25	20.77	0	0
	1905	19150	10	QPSK	1	49	20.72	0	0
	1905	19150	10	QPSK	25	0	20.54	0-1	0
	1905	19150	10	QPSK	25	12	20.57	0-1	0
	1905	19150	10	QPSK	25	25	20.65	0-1	0
	1905	19150	10	QPSK	50	0	20.60	0-1	0
	1905	19150	10	16QAM	1	0	20.69	0-1	0
	1905	19150	10	16QAM	1	25	20.65	0-1	0
	1905	19150	10	16QAM	1	49	20.96	0-1	0
	1905	19150	10	16QAM	25	0	20.49	0-2	0
	1905	19150	10	16QAM	25	12	20.53	0-2	0
	1905	19150	10	16QAM	25	25	20.50	0-2	0
	1905	19150	10	16QAM	50	0	20.51	0-2	0

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 63 of 103	

Table 9-42
LTE Band 2 (PCS) Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1852.5	18625	5	QPSK	1	0	20.69	0	0
	1852.5	18625	5	QPSK	1	12	20.64	0	0
	1852.5	18625	5	QPSK	1	24	20.73	0	0
	1852.5	18625	5	QPSK	12	0	20.58	0-1	0
	1852.5	18625	5	QPSK	12	6	20.61	0-1	0
	1852.5	18625	5	QPSK	12	13	20.57	0-1	0
	1852.5	18625	5	QPSK	25	0	20.57	0-1	0
	1852.5	18625	5	16-QAM	1	0	20.68	0-1	0
	1852.5	18625	5	16-QAM	1	12	20.64	0-1	0
	1852.5	18625	5	16-QAM	1	24	20.74	0-1	0
	1852.5	18625	5	16-QAM	12	0	20.63	0-2	0
	1852.5	18625	5	16-QAM	12	6	20.51	0-2	0
Mid	1852.5	18625	5	16-QAM	12	13	20.92	0-2	0
	1852.5	18625	5	16-QAM	25	0	20.46	0-2	0
	1880.0	18900	5	QPSK	1	0	20.68	0	0
	1880.0	18900	5	QPSK	1	12	20.63	0	0
	1880.0	18900	5	QPSK	1	24	20.62	0	0
	1880.0	18900	5	QPSK	12	0	20.57	0-1	0
	1880.0	18900	5	QPSK	12	6	20.50	0-1	0
	1880.0	18900	5	QPSK	12	13	20.45	0-1	0
	1880.0	18900	5	QPSK	25	0	20.48	0-1	0
	1880.0	18900	5	16-QAM	1	0	20.87	0-1	0
	1880.0	18900	5	16-QAM	1	12	20.93	0-1	0
	1880.0	18900	5	16-QAM	1	24	21.01	0-1	0
High	1880.0	18900	5	16-QAM	12	0	20.47	0-2	0
	1880.0	18900	5	16-QAM	12	6	20.51	0-2	0
	1880.0	18900	5	16-QAM	12	13	20.47	0-2	0
	1880.0	18900	5	16-QAM	25	0	20.50	0-2	0
	1907.5	19175	5	QPSK	1	0	20.68	0	0
	1907.5	19175	5	QPSK	1	12	20.75	0	0
	1907.5	19175	5	QPSK	1	24	20.74	0	0
	1907.5	19175	5	QPSK	12	0	20.56	0-1	0
	1907.5	19175	5	QPSK	12	6	20.59	0-1	0
	1907.5	19175	5	QPSK	12	13	20.63	0-1	0
	1907.5	19175	5	QPSK	25	0	20.58	0-1	0
	1907.5	19175	5	16-QAM	1	0	20.66	0-1	0
	1907.5	19175	5	16-QAM	1	12	20.63	0-1	0
	1907.5	19175	5	16-QAM	1	24	20.94	0-1	0
	1907.5	19175	5	16-QAM	12	0	20.47	0-2	0
	1907.5	19175	5	16-QAM	12	6	20.51	0-2	0
	1907.5	19175	5	16-QAM	12	13	20.48	0-2	0
	1907.5	19175	5	16-QAM	25	0	20.49	0-2	0

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 64 of 103

Table 9-43
LTE Band 2 (PCS) Conducted Powers - 3 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1851.5	18615	3	QPSK	1	0	20.73	0	0
	1851.5	18615	3	QPSK	1	7	20.52	0	0
	1851.5	18615	3	QPSK	1	14	20.77	0	0
	1851.5	18615	3	QPSK	8	0	20.62	0-1	0
	1851.5	18615	3	QPSK	8	4	20.65	0-1	0
	1851.5	18615	3	QPSK	8	7	20.61	0-1	0
	1851.5	18615	3	QPSK	15	0	20.74	0-1	0
	1851.5	18615	3	16-QAM	1	0	20.72	0-1	0
	1851.5	18615	3	16-QAM	1	7	20.68	0-1	0
	1851.5	18615	3	16-QAM	1	14	20.64	0-1	0
	1851.5	18615	3	16-QAM	8	0	20.61	0-2	0
	1851.5	18615	3	16-QAM	8	4	20.55	0-2	0
Mid	1851.5	18615	3	16-QAM	8	7	20.63	0-2	0
	1851.5	18615	3	16-QAM	15	0	20.75	0-2	0
	1880.0	18900	3	QPSK	1	0	20.72	0	0
	1880.0	18900	3	QPSK	1	7	20.67	0	0
	1880.0	18900	3	QPSK	1	14	20.66	0	0
	1880.0	18900	3	QPSK	8	0	20.61	0-1	0
	1880.0	18900	3	QPSK	8	4	20.54	0-1	0
	1880.0	18900	3	QPSK	8	7	20.57	0-1	0
	1880.0	18900	3	QPSK	15	0	20.52	0-1	0
	1880.0	18900	3	16-QAM	1	0	20.91	0-1	0
	1880.0	18900	3	16-QAM	1	7	20.97	0-1	0
	1880.0	18900	3	16-QAM	1	14	21.05	0-1	0
High	1880.0	18900	3	16-QAM	8	0	20.51	0-2	0
	1880.0	18900	3	16-QAM	8	4	20.55	0-2	0
	1880.0	18900	3	16-QAM	8	7	20.51	0-2	0
	1880.0	18900	3	16-QAM	15	0	20.54	0-2	0
	1908.5	19185	3	QPSK	1	0	20.75	0	0
	1908.5	19185	3	QPSK	1	7	20.79	0	0
	1908.5	19185	3	QPSK	1	14	20.74	0	0
	1908.5	19185	3	QPSK	8	0	20.77	0-1	0
	1908.5	19185	3	QPSK	8	4	20.59	0-1	0
	1908.5	19185	3	QPSK	8	7	20.67	0-1	0
	1908.5	19185	3	QPSK	15	0	20.62	0-1	0
	1908.5	19185	3	16-QAM	1	0	20.71	0-1	0
	1908.5	19185	3	16-QAM	1	7	20.67	0-1	0
	1908.5	19185	3	16-QAM	1	14	20.98	0-1	0
	1908.5	19185	3	16-QAM	8	0	20.51	0-2	0
	1908.5	19185	3	16-QAM	8	4	20.55	0-2	0
	1908.5	19185	3	16-QAM	8	7	20.52	0-2	0
	1908.5	19185	3	16-QAM	15	0	20.53	0-2	0

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 65 of 103

Table 9-44
LTE Band 2 (PCS) Conducted Powers -1.4 MHz Bandwidth

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
1850.7	18607	1.4	QPSK	1	0	20.72	0	0
1850.7	18607	1.4	QPSK	1	2	20.51	0	0
1850.7	18607	1.4	QPSK	1	5	20.76	0	0
1850.7	18607	1.4	QPSK	3	0	20.61	0	0
1850.7	18607	1.4	QPSK	3	2	20.64	0	0
1850.7	18607	1.4	QPSK	3	3	20.60	0	0
1850.7	18607	1.4	QPSK	6	0	20.60	0-1	0
1850.7	18607	1.4	16-QAM	1	0	20.71	0-1	0
1850.7	18607	1.4	16-QAM	1	2	20.67	0-1	0
1850.7	18607	1.4	16-QAM	1	5	20.63	0-1	0
1850.7	18607	1.4	16-QAM	3	0	20.66	0-1	0
1850.7	18607	1.4	16-QAM	3	2	20.54	0-1	0
1850.7	18607	1.4	16-QAM	3	3	20.95	0-1	0
1850.7	18607	1.4	16-QAM	6	0	20.74	0-2	0
1880.0	18900	1.4	QPSK	1	0	20.71	0	0
1880.0	18900	1.4	QPSK	1	2	20.74	0	0
1880.0	18900	1.4	QPSK	1	5	20.65	0	0
1880.0	18900	1.4	QPSK	3	0	20.60	0	0
1880.0	18900	1.4	QPSK	3	2	20.53	0	0
1880.0	18900	1.4	QPSK	3	3	20.57	0	0
1880.0	18900	1.4	QPSK	6	0	20.51	0-1	0
1880.0	18900	1.4	16-QAM	1	0	20.90	0-1	0
1880.0	18900	1.4	16-QAM	1	2	20.96	0-1	0
1880.0	18900	1.4	16-QAM	1	5	21.04	0-1	0
1880.0	18900	1.4	16-QAM	3	0	20.50	0-1	0
1880.0	18900	1.4	16-QAM	3	2	20.54	0-1	0
1880.0	18900	1.4	16-QAM	3	3	20.50	0-1	0
1880.0	18900	1.4	16-QAM	6	0	20.53	0-2	0
1909.3	19193	1.4	QPSK	1	0	20.74	0	0
1909.3	19193	1.4	QPSK	1	2	20.78	0	0
1909.3	19193	1.4	QPSK	1	5	20.73	0	0
1909.3	19193	1.4	QPSK	3	0	20.55	0	0
1909.3	19193	1.4	QPSK	3	2	20.58	0	0
1909.3	19193	1.4	QPSK	3	3	20.66	0	0
1909.3	19193	1.4	QPSK	6	0	20.61	0-1	0
1909.3	19193	1.4	16-QAM	1	0	20.71	0-1	0
1909.3	19193	1.4	16-QAM	1	2	20.66	0-1	0
1909.3	19193	1.4	16-QAM	1	5	20.97	0-1	0
1909.3	19193	1.4	16-QAM	3	0	20.52	0-1	0
1909.3	19193	1.4	16-QAM	3	2	20.54	0-1	0
1909.3	19193	1.4	16-QAM	3	3	20.64	0-1	0
1909.3	19193	1.4	16-QAM	6	0	20.55	0-2	0

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 66 of 103	

9.4 LTE Carrier Aggregation Conducted Powers

Table 9-45
Maximum LTE Carrier Aggregation Conducted Powers
– Band 12 (PCC) 10MHz BW, QPSK + Band 4 (SCC) 20 MHz BW

Band 12 (PCC) 10 MHz BW + Band 4 (SCC) 20 MHz BW				
707.5 MHz / ch.23095 + 2132.5 MHz / ch. 2175	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE B12 Rel. 8 Tx.Power (dBm)
	1	0	24.45	24.30

Table 9-46
Reduced LTE Carrier Aggregation Conducted Powers
– Band 12 (PCC) 10MHz BW, 16-QAM + Band 4 (SCC) 20 MHz BW

Band 12 (PCC) 10 MHz BW + Band 4 (SCC) 20 MHz BW				
707.5 MHz / ch.23095 + 2132.5 MHz / ch. 2175	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE B12 Rel. 8 Tx.Power (dBm)
	1	25	22.85	22.93

Table 9-47
Maximum LTE Carrier Aggregation Conducted Powers
– Band 12 (PCC) 10 MHz BW, QPSK + Band 2 (SCC) 20 MHz BW

Band 12 (PCC) 10 MHz BW + Band 2 (SCC) 20 MHz BW				
707.5 MHz / ch.23095 + 1960.0 MHz / ch. 900	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE B12 Rel. 8 Tx.Power (dBm)
	1	0	24.46	24.30

Table 9-48
Reduced LTE Carrier Aggregation Conducted Powers
– Band 12 (PCC) 10 MHz BW, 16-QAM + Band 2 (SCC) 20 MHz BW

Band 12 (PCC) 10 MHz BW + Band 2 (SCC) 20 MHz BW				
707.5 MHz / ch.23095 + 1960.0 MHz / ch. 900	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE B12 Rel. 8 Tx.Power (dBm)
	1	25	22.91	22.93

Table 9-49
Max LTE Carrier Aggregation Conducted Powers
– Band 4 (PCC) 15 MHz BW, QPSK + Band 12 (SCC) 10 MHz BW

Band 4 (PCC) 15 MHz BW + Band 12 (SCC) 10 MHz BW				
1717.5 MHz / ch.20025 + 737.7 MHz / ch. 5097	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE B4 Rel. 8 Tx.Power (dBm)
	1	0	24.47	24.50

Table 9-50
Reduced LTE Carrier Aggregation Conducted Powers
– Band 4 (PCC) 20MHz BW, QPSK + Band 12 (SCC) 10 MHz BW

Band 4 (PCC) 20 MHz BW + Band 12 (SCC) 10 MHz BW				
1732.5 MHz / ch.20175 + 737.7 MHz / ch. 5097	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE B4 Rel. 8 Tx.Power (dBm)
	1	50	20.48	20.48

Table 9-51
Maximum LTE Carrier Aggregation Conducted Powers
– Band 4 (PCC) 15 MHz BW, QPSK + Band 4 (SCC) 20 MHz BW

Band 4 (PCC) 15 MHz BW + Band 4 (SCC) 20 MHz BW				
1717.5 MHz / ch. 20025 + 2145 MHz / ch. 2300	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE B4 Rel. 8 Tx.Power (dBm)
	1	0	24.49	24.50

Table 9-52
Reduced LTE Carrier Aggregation Conducted Powers
– Band 4 (PCC) 20MHz BW. QPSK + Band 4 (SCC) 20 MHz BW

Band 4 (PCC) 20 MHz BW + Band 4 (SCC) 20 MHz BW				
1732.5 MHz / ch. 20175 + 2145 MHz / ch. 2300	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE B4 Rel. 8 Tx.Power (dBm)
	1	50	20.47	20.48

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 67 of 103

Table 9-53
Maximum LTE Carrier Aggregation Conducted Powers
– Band 4 (PCC) 15 MHz BW, QPSK + Band 2 (SCC) 20 MHz BW

Band 4 (PCC) 15 MHz BW + Band 2 (SCC) 20 MHz BW				
1717.5 MHz / ch.20025 + 1960.0 MHz / ch. 900	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE B4 Rel. 8 Tx.Power (dBm)
	1	0	24.48	24.50

Table 9-54
Reduced LTE Carrier Aggregation Conducted Powers
– Band 4 (PCC) 20MHz BW, QPSK + Band 2 (SCC) 20 MHz BW

Band 4 (PCC) 20 MHz BW + Band 2 (SCC) 20 MHz BW				
1732.5 MHz / ch.20175 + 1960.0 MHz / ch. 900	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE B4 Rel. 8 Tx.Power (dBm)
	1	50	20.51	20.48

Table 9-55
Maximum LTE Carrier Aggregation Conducted Powers
– Band 2 (PCC) 20MHz BW, QPSK + Band 12 (SCC) 10 MHz BW

Band 2 (PCC) 20 MHz BW + Band 12 (SCC) 10 MHz BW				
1900 MHz / ch.19100 + 737.7 MHz / ch. 5097	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE B2 Rel. 8 Tx.Power (dBm)
	1	50	24.44	24.49

Table 9-56
Reduced LTE Carrier Aggregation Conducted Powers
– Band 2 (PCC) 20MHz BW, 16-QAM + Band 12 (SCC) 10 MHz BW

Band 2 (PCC) 20 MHz BW + Band 12 (SCC) 10 MHz BW				
1880 MHz / ch.18900 + 737.7 MHz / ch. 5097	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE B2 Rel. 8 Tx.Power (dBm)
	1	99	20.99	21.07

Table 9-57
Maximum LTE Carrier Aggregation Conducted Powers
– Band 2 (PCC) 20MHz BW, QPSK + Band 4 (SCC) 20 MHz BW

Band 2 (PCC) 20 MHz BW + Band 4 (SCC) 20 MHz BW				
1900 MHz / ch.19100 + 2132.5 MHz / ch. 2175	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE B2 Rel. 8 Tx.Power (dBm)
	1	50	24.47	24.49

Table 9-58
Reduced LTE Carrier Aggregation Conducted Powers
– Band 2 (PCC) 20MHz BW, 16-QAM + Band 4 (SCC) 20 MHz BW

Band 2 (PCC) 20 MHz BW + Band 4 (SCC) 20 MHz BW				
1880 MHz / ch.18900 + 2132.5 MHz / ch. 2175	PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE B2 Rel. 8 Tx.Power (dBm)
	1	99	21.00	21.07

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 68 of 103

Notes:

1. The device does not support all Rel. 10 Carrier Aggregation features due to modem chipset limitation.
2. The device only supports downlink Carrier Aggregation. Uplink Carrier Aggregation is not supported. Power measurements were performed with two DL carriers for the Release 8 configuration that had the highest output power (across all bandwidths, channels and RB Configurations) for each band
3. This device supports inter-band CA with 2 carriers (B12+B4, B12+B2, B4+B12, B4+B2, B2+B12, B2+B4) with a maximum of 10 MHz of spectrum for LTE Band 12 and a maximum of 20 MHz of spectrum for LTE Band 4/2. This device supports intra-band CA in 1 band with 2 carriers (B4+B4).
4. All control and acknowledge data is sent on uplink channels that operate identical to release 8 specifications.
5. The carrier aggregation powers were measured using the highest maximum output power configuration for uplink (single carrier) with downlink carrier aggregation inactive measured among the channel bandwidth, modulation and RB combinations in each frequency band.

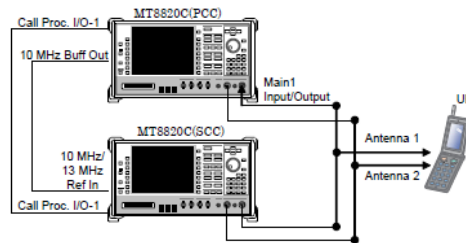


Figure 9-3
Power Measurement Setup

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 69 of 103

9.5 WLAN Conducted Powers

9.5.1 Maximum Conducted Powers

Table 9-59

2.4 GHz Average RF Power – Antenna 1

Freq [MHz]	Channel	2.4GHz Conducted Power [dBm]
		IEEE Transmission Mode
		802.11b
2412	1	16.96
2437	6	17.38
2462	11	17.08

Table 9-60

2.4 GHz Average RF Power – Antenna 2

Freq [MHz]	Channel	2.4GHz Conducted Power [dBm]
		IEEE Transmission Mode
		802.11b
2412	1	17.09
2437	6	16.71
2462	11	16.69

Table 9-61

5 GHz (20 MHz Bandwidth) Average RF Power – Antenna 1

Freq [MHz]	Channel	5GHz (20MHz) Conducted Power [dBm]	
		IEEE Transmission Mode	
		802.11a	802.11n
5180	36	13.91	13.78
5200	40	13.72	13.76
5220	44	13.89	13.69
5240	48	14.07	13.81
5260	52	14.06	14.06
5280	56	14.20	13.99
5300	60	14.33	14.16
5320	64	14.16	14.12
5500	100	14.19	14.21
5540	108	13.55	13.65
5580	116	14.23	14.22
5660	132	14.35	14.33
5745	149	14.19	13.94
5825	165	13.76	13.82

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 70 of 103

Table 9-62
5 GHz (20 MHz Bandwidth) Average RF Power – Antenna 2

Freq [MHz]	Channel	5GHz (20MHz) Conducted Power [dBm]	
		IEEE Transmission Mode	
		802.11a	802.11n
5180	36	14.24	14.00
5200	40	14.13	13.99
5220	44	14.02	13.96
5240	48	13.87	13.78
5260	52	13.94	14.05
5280	56	13.87	13.98
5300	60	13.85	13.95
5320	64	13.78	13.91
5500	100	14.19	14.01
5540	108	13.81	13.78
5580	116	14.15	14.05
5660	132	14.08	14.02
5745	149	14.31	14.08
5825	165	14.11	14.18

9.5.2 Reduced Conducted Powers – Held-to-Ear

Table 9-63
2.4 GHz Average RF Power – Antenna 1

Freq [MHz]	Channel	2.4GHz Conducted Power [dBm]
		IEEE Transmission Mode
		802.11b
2412	1	15.26
2437	6	15.47
2462	11	14.96

Table 9-64
2.4 GHz Average RF Power – Antenna 2

Freq [MHz]	Channel	2.4GHz Conducted Power [dBm]
		IEEE Transmission Mode
		802.11b
2412	1	15.06
2437	6	15.09
2462	11	15.03

FCC ID: A3LSMG925T	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset
© 2015 PCTEST Engineering Laboratory, Inc.		Page 71 of 103

Table 9-65
5 GHz (20 MHz Bandwidth) Average RF Power – Antenna 1

Freq [MHz]	Channel	5GHz (20MHz) Conducted Power [dBm]		
		IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
5180	36	9.09	9.05	9.17
5200	40	9.21	9.06	9.33
5220	44	9.31	9.10	8.55
5240	48	9.15	9.15	9.23
5260	52	9.48	9.41	8.63
5280	56	9.46	9.42	8.72
5300	60	9.45	9.42	8.95
5320	64	9.49	9.39	8.81
5500	100	9.09	8.63	8.52
5540	108	9.31	8.80	8.56
5580	116	9.49	9.48	8.78
5660	132	8.66	8.84	8.89
5745	149	9.42	8.89	8.72
5825	165	9.10	9.00	8.73

Table 9-66
5 GHz (20 MHz Bandwidth) Average RF Power – Antenna 2

Freq [MHz]	Channel	5GHz (20MHz) Conducted Power [dBm]		
		IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
5180	36	8.75	8.74	9.13
5200	40	9.02	8.71	8.83
5220	44	8.53	8.45	8.00
5240	48	9.43	9.33	8.76
5260	52	9.11	9.10	8.70
5280	56	9.02	9.00	8.54
5300	60	8.95	9.10	8.03
5320	64	8.97	8.91	8.24
5500	100	9.26	9.25	8.75
5540	108	9.24	9.22	8.79
5580	116	9.23	9.19	8.73
5660	132	9.22	9.22	8.56
5745	149	9.00	9.13	8.78
5825	165	9.25	9.20	8.98

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 72 of 103

Justification for test configurations for WLAN per KDB Publication 248227 D01DR02-41929:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.

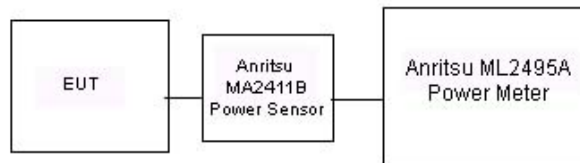


Figure 9-4
Power Measurement Setup for Bandwidths < 50 MHz




Figure 9-5
Power Measurement Setup for Bandwidths > 50 MHz

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 73 of 103

10 SYSTEM VERIFICATION

10.1 Tissue Verification

Table 10-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (C°)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
01/19/2015	750H	19.5	695	0.849	41.688	0.889	42.227	-4.50%	-1.28%
			710	0.863	41.471	0.890	42.149	-3.03%	-1.61%
			740	0.890	40.993	0.893	41.994	-0.34%	-2.38%
			755	0.902	40.754	0.894	41.916	0.89%	-2.77%
01/19/2015	835H	22.0	820	0.917	43.652	0.899	41.578	2.00%	4.99%
			835	0.933	43.439	0.900	41.500	3.67%	4.67%
			850	0.944	43.224	0.916	41.500	3.06%	4.15%
01/22/2015	1750H	22.0	1710	1.305	38.634	1.348	40.142	-3.19%	-3.76%
			1750	1.344	38.466	1.371	40.079	-1.97%	-4.02%
			1790	1.385	38.286	1.394	40.016	-0.65%	-4.32%
01/19/2015	1900H	22.3	1850	1.363	39.524	1.400	40.000	-2.64%	-1.19%
			1880	1.390	39.392	1.400	40.000	-0.71%	-1.52%
			1910	1.419	39.232	1.400	40.000	1.36%	-1.92%
02/02/2015	2450H	21.9	2401	1.745	38.159	1.756	39.287	-0.63%	-2.87%
			2450	1.797	37.953	1.800	39.200	-0.17%	-3.18%
			2499	1.853	37.796	1.853	39.138	0.00%	-3.43%
01/27/2015	5200H-5800H	20.1	5260	4.600	37.180	4.717	35.917	-2.48%	3.52%
			5300	4.627	37.125	4.758	35.871	-2.75%	3.50%
			5320	4.658	37.090	4.778	35.849	-2.51%	3.46%
			5500	4.847	36.818	4.963	35.643	-2.34%	3.30%
			5580	4.921	36.704	5.045	35.551	-2.46%	3.24%
			5600	4.951	36.628	5.065	35.529	-2.25%	3.09%
			5745	5.099	36.443	5.214	35.363	-2.21%	3.05%
			5800	5.169	36.411	5.270	35.300	-1.92%	3.15%
			5825	5.188	36.400	5.296	35.271	-2.04%	3.20%
			5800	5.169	36.411	5.270	35.300	-1.92%	3.15%
01/22/2015	750B	24.3	695	0.912	53.856	0.959	55.745	-4.90%	-3.39%
			710	0.926	53.689	0.960	55.687	-3.54%	-3.59%
			740	0.955	53.372	0.963	55.570	-0.83%	-3.96%
			755	0.968	53.254	0.964	55.512	0.41%	-4.07%
01/22/2015	835B	22.4	820	0.998	55.428	0.969	55.258	2.99%	0.31%
			835	1.010	55.292	0.970	55.200	4.12%	0.17%
			850	1.023	55.175	0.988	55.154	3.54%	0.04%
01/22/2015	1750B	23.0	1710	1.418	52.054	1.463	53.537	-3.08%	-2.77%
			1750	1.461	51.925	1.488	53.432	-1.81%	-2.82%
			1790	1.506	51.806	1.514	53.326	-0.53%	-2.85%
01/26/2015	1750B	22.0	1710	1.436	52.692	1.463	53.537	-1.85%	-1.58%
			1750	1.479	52.543	1.488	53.432	-0.60%	-1.66%
			1790	1.522	52.413	1.514	53.326	0.53%	-1.71%
01/22/2015	1900B	23.0	1850	1.488	51.809	1.520	53.300	-2.11%	-2.80%
			1880	1.522	51.716	1.520	53.300	0.13%	-2.97%
			1910	1.552	51.592	1.520	53.300	2.11%	-3.20%
01/22/2015	2450B	23.8	2401	1.858	51.158	1.903	52.765	-2.36%	-3.05%
			2450	1.925	50.991	1.950	52.700	-1.28%	-3.24%
			2499	1.987	50.821	2.019	52.638	-1.58%	-3.45%
01/19/2015	5200B-5800B	22.6	5260	5.485	48.257	5.369	48.933	2.16%	-1.38%
			5300	5.542	48.230	5.416	48.879	2.33%	-1.33%
			5500	5.845	47.908	5.650	48.607	3.45%	-1.44%
			5580	5.899	47.646	5.743	48.499	2.72%	-1.76%
			5600	5.977	47.642	5.766	48.471	3.66%	-1.71%
			5660	6.000	47.474	5.837	48.390	2.79%	-1.89%
			5745	6.176	47.389	5.936	48.275	4.04%	-1.84%
			5800	6.183	47.296	6.000	48.200	3.05%	-1.88%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 74 of 103	

10.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 10-2
System Verification Results

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
K	750	HEAD	01/19/2015	24.2	21.3	0.100	1054	3288	0.784	8.330	7.840	-5.88%
D	835	HEAD	01/19/2015	23.1	23.0	0.100	4d133	3263	0.971	9.200	9.710	5.54%
D	1750	HEAD	01/22/2015	23.0	22.9	0.100	1008	3263	3.450	36.900	34.500	-6.50%
G	1900	HEAD	01/19/2015	24.4	22.3	0.100	5d149	3258	4.150	40.200	41.500	3.23%
G	2450	HEAD	02/02/2015	24.1	23.0	0.100	719	3258	5.070	52.100	50.700	-2.69%
H	5300	HEAD	01/27/2015	24.5	21.6	0.100	1120	3920	8.170	83.400	81.700	-2.04%
H	5500	HEAD	01/27/2015	24.0	21.6	0.100	1120	3920	8.360	84.900	83.600	-1.53%
H	5600	HEAD	01/27/2015	23.3	21.6	0.100	1120	3920	8.430	82.200	84.300	2.55%
H	5800	HEAD	01/27/2015	23.3	21.6	0.100	1120	3920	8.100	79.100	81.000	2.40%
E	750	BODY	01/22/2015	23.2	23.4	0.100	1054	3332	0.855	8.640	8.550	-1.04%
K	835	BODY	01/22/2015	24.2	22.4	0.100	4d133	3288	1.020	9.350	10.200	9.09%
D	1750	BODY	01/22/2015	24.2	23.0	0.100	1008	3263	3.650	37.600	36.500	-2.93%
K	1750	BODY	01/26/2015	23.9	22.1	0.100	1008	3288	3.720	37.600	37.200	-1.06%
G	1900	BODY	01/22/2015	23.9	23.0	0.100	5d149	3258	4.120	40.400	41.200	1.98%
I	2450	BODY	01/22/2015	23.5	23.8	0.100	719	3209	5.200	51.800	52.000	0.39%
H	5300	BODY	01/19/2015	24.7	23.1	0.100	1191	3920	7.950	79.900	79.500	-0.50%
H	5500	BODY	01/19/2015	24.1	23.1	0.100	1191	3920	7.600	83.100	76.000	-8.54%
H	5600	BODY	01/19/2015	24.1	23.1	0.100	1191	3920	7.630	84.100	76.300	-9.27%
H	5800	BODY	01/19/2015	23.9	23.1	0.100	1191	3920	7.090	78.000	70.900	-9.10%

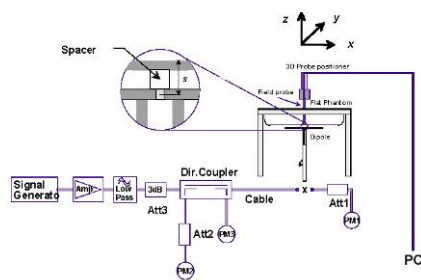


Figure 10-1
System Verification Setup Diagram



Figure 10-2
System Verification Setup Photo

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 75 of 103

11 SAR DATA SUMMARY

11.1 Standalone Head SAR Data

**Table 11-1
GSM 850 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.5	33.21	0.02	Right	Cheek	15C02	1:8.3	0.119	1.069	0.127	A1
836.60	190	GSM 850	GSM	33.5	33.21	-0.06	Right	Tilt	15C02	1:8.3	0.065	1.069	0.069	
836.60	190	GSM 850	GSM	33.5	33.21	0.03	Left	Cheek	15C02	1:8.3	0.097	1.069	0.104	
836.60	190	GSM 850	GSM	33.5	33.21	0.03	Left	Tilt	15C02	1:8.3	0.049	1.069	0.052	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

**Table 11-2
GSM 1900 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	31.0	30.73	-0.01	Right	Cheek	15C03	1:8.3	0.061	1.064	0.065	
1880.00	661	GSM 1900	GSM	31.0	30.73	0.03	Right	Tilt	15C03	1:8.3	0.031	1.064	0.033	
1880.00	661	GSM 1900	GSM	31.0	30.73	0.08	Left	Cheek	15C03	1:8.3	0.086	1.064	0.092	A2
1880.00	661	GSM 1900	GSM	31.0	30.73	0.19	Left	Tilt	15C03	1:8.3	0.025	1.064	0.027	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-3
UMTS 850 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	24.5	23.95	0.10	Right	Cheek	15C02	1:1	0.102	1.135	0.116	A3
836.60	4183	UMTS 850	RMC	24.5	23.95	0.19	Right	Tilt	15C02	1:1	0.054	1.135	0.061	
836.60	4183	UMTS 850	RMC	24.5	23.95	0.05	Left	Cheek	15C02	1:1	0.083	1.135	0.094	
836.60	4183	UMTS 850	RMC	24.5	23.95	0.21	Left	Tilt	15C02	1:1	0.058	1.135	0.066	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 76 of 103

Table 11-4
UMTS 1750 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	24.5	23.73	0.09	Right	Cheek	15C00	1:1	0.186	1.194	0.222	A4
1732.40	1412	UMTS 1750	RMC	24.5	23.73	0.10	Right	Tilt	15C00	1:1	0.085	1.194	0.101	
1732.40	1412	UMTS 1750	RMC	24.5	23.73	-0.02	Left	Cheek	15C00	1:1	0.154	1.194	0.184	
1732.40	1412	UMTS 1750	RMC	24.5	23.73	0.05	Left	Tilt	15C00	1:1	0.099	1.194	0.118	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-5
UMTS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	24.5	24.12	0.14	Right	Cheek	15C03	1:1	0.166	1.091	0.181	A5
1880.00	9400	UMTS 1900	RMC	24.5	24.12	-0.03	Right	Tilt	15C03	1:1	0.063	1.091	0.069	
1880.00	9400	UMTS 1900	RMC	24.5	24.12	-0.15	Left	Cheek	15C03	1:1	0.128	1.091	0.140	
1880.00	9400	UMTS 1900	RMC	24.5	24.12	0.03	Left	Tilt	15C03	1:1	0.046	1.091	0.050	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 11-6
LTE Band 12 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.0	24.30	-0.05	0	Right	Cheek	QPSK	1	0	15C76	1:1	0.289	1.175	0.340	
707.50	23095	Mid	LTE Band 12	10	24.0	22.86	0.05	1	Right	Cheek	QPSK	25	0	15C76	1:1	0.202	1.300	0.263	
707.50	23095	Mid	LTE Band 12	10	25.0	24.30	0.00	0	Right	Tilt	QPSK	1	0	15C76	1:1	0.200	1.175	0.235	
707.50	23095	Mid	LTE Band 12	10	24.0	22.86	0.11	1	Right	Tilt	QPSK	25	0	15C76	1:1	0.194	1.300	0.252	
707.50	23095	Mid	LTE Band 12	10	25.0	24.30	0.06	0	Left	Cheek	QPSK	1	0	15C76	1:1	0.293	1.175	0.344	A6
707.50	23095	Mid	LTE Band 12	10	24.0	22.86	0.07	1	Left	Cheek	QPSK	25	0	15C76	1:1	0.213	1.300	0.277	
707.50	23095	Mid	LTE Band 12	10	25.0	24.30	0.09	0	Left	Tilt	QPSK	1	0	15C76	1:1	0.179	1.175	0.210	
707.50	23095	Mid	LTE Band 12	10	24.0	22.86	0.11	1	Left	Tilt	QPSK	25	0	15C76	1:1	0.135	1.300	0.176	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 77 of 103

Table 11-7
LTE Band 5 (Cell) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)	(W/kg)			
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.0	24.49	0.10	0	Right	Cheek	QPSK	1	25	15C76	1:1	0.146	1.125	0.164	A7
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.0	23.19	0.12	1	Right	Cheek	QPSK	25	0	15C76	1:1	0.115	1.205	0.139	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.0	24.49	0.06	0	Right	Tilt	QPSK	1	25	15C76	1:1	0.092	1.125	0.104	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.0	23.19	0.14	1	Right	Tilt	QPSK	25	0	15C76	1:1	0.060	1.205	0.072	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.0	24.49	0.11	0	Left	Cheek	QPSK	1	25	15C76	1:1	0.089	1.125	0.100	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.0	23.19	0.13	1	Left	Cheek	QPSK	25	0	15C76	1:1	0.061	1.205	0.074	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.0	24.49	0.03	0	Left	Tilt	QPSK	1	25	15C76	1:1	0.058	1.125	0.065	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.0	23.19	0.03	1	Left	Tilt	QPSK	25	0	15C76	1:1	0.039	1.205	0.047	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-8
LTE Band 4 (AWS) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR(1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)	(W/kg)			
1732.50	20175	Mid	LTE Band 4 (AWS)	20	25.0	24.25	0.02	0	Right	Cheek	QPSK	1	99	15C09	1:1	0.170	1.189	0.202	A8
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	22.87	0.05	1	Right	Cheek	QPSK	50	50	15C09	1:1	0.123	1.297	0.160	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	25.0	24.25	0.18	0	Right	Tilt	QPSK	1	99	15C09	1:1	0.088	1.189	0.105	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	22.87	0.07	1	Right	Tilt	QPSK	50	50	15C09	1:1	0.063	1.297	0.082	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	25.0	24.25	-0.04	0	Left	Cheek	QPSK	1	99	15C09	1:1	0.162	1.189	0.193	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	22.87	-0.06	1	Left	Cheek	QPSK	50	50	15C09	1:1	0.110	1.297	0.143	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	25.0	24.25	0.18	0	Left	Tilt	QPSK	1	99	15C09	1:1	0.095	1.189	0.113	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	22.87	0.02	1	Left	Tilt	QPSK	50	50	15C09	1:1	0.067	1.297	0.087	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-9
LTE Band 2 (PCS) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)	(W/kg)			
1900.00	19100	High	LTE Band 2 (PCS)	20	25.0	24.49	0.01	0	Right	Cheek	QPSK	1	50	15C73	1:1	0.160	1.125	0.180	A9
1900.00	19100	High	LTE Band 2 (PCS)	20	24.0	23.13	-0.05	1	Right	Cheek	QPSK	50	25	15C73	1:1	0.123	1.222	0.150	
1900.00	19100	High	LTE Band 2 (PCS)	20	25.0	24.49	0.03	0	Right	Tilt	QPSK	1	50	15C73	1:1	0.044	1.125	0.050	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.0	23.13	0.21	1	Right	Tilt	QPSK	50	25	15C73	1:1	0.034	1.222	0.042	
1900.00	19100	High	LTE Band 2 (PCS)	20	25.0	24.49	-0.20	0	Left	Cheek	QPSK	1	50	15C73	1:1	0.134	1.125	0.151	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.0	23.13	0.09	1	Left	Cheek	QPSK	50	25	15C73	1:1	0.105	1.222	0.128	
1900.00	19100	High	LTE Band 2 (PCS)	20	25.0	24.49	0.01	0	Left	Tilt	QPSK	1	50	15C73	1:1	0.040	1.125	0.045	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.0	23.13	0.03	1	Left	Tilt	QPSK	50	25	15C73	1:1	0.029	1.222	0.035	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 78 of 103

**Table 11-10
DTS Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	15.5	15.47	-0.04	Right	Cheek	1	15624	1	99.90	0.664	0.507	1.007	1.001	0.512	A10
2437	6	802.11b	DSSS	22	15.5	15.47	-0.03	Right	Tilt	1	15624	1	99.90	0.435	0.316	1.007	1.001	0.318	
2437	6	802.11b	DSSS	22	15.5	15.47	0.13	Left	Cheek	1	15624	1	99.90	0.377	-	1.007	1.001	-	
2437	6	802.11b	DSSS	22	15.5	15.47	0.02	Left	Tilt	1	15624	1	99.90	0.211	-	1.007	1.001	-	
2437	6	802.11b	DSSS	22	15.5	15.09	0.03	Right	Cheek	2	15624	1	99.89	0.177	0.124	1.099	1.001	0.136	
2437	6	802.11b	DSSS	22	15.5	15.09	0.03	Right	Tilt	2	15624	1	99.89	0.176	-	1.099	1.001	-	
2437	6	802.11b	DSSS	22	15.5	15.09	0.05	Left	Cheek	2	15624	1	99.89	0.032	-	1.099	1.001	-	
2437	6	802.11b	DSSS	22	15.5	15.09	-0.08	Left	Tilt	2	15624	1	99.89	0.095	-	1.099	1.001	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-11
NII Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Duty Cycle	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
5320	64	802.11a	OFDM	20	9.5	9.49	0.17	Right	Cheek	1	15624	6	98.62	1.400	0.545	1.002	1.014	0.554	A11
5320	64	802.11a	OFDM	20	9.5	9.49	0.04	Right	Tilt	1	15624	6	98.62	0.912	0.354	1.002	1.014	0.360	
5320	64	802.11a	OFDM	20	9.5	9.49	0.04	Left	Cheek	1	15624	6	98.62	0.576	-	1.002	1.014	-	
5320	64	802.11a	OFDM	20	9.5	9.49	0.16	Left	Tilt	1	15624	6	98.62	0.398	-	1.002	1.014	-	
5260	52	802.11a	OFDM	20	9.5	9.11	0.01	Right	Cheek	2	15624	6	98.41	0.664	0.262	1.094	1.016	0.292	
5260	52	802.11a	OFDM	20	9.5	9.11	0.03	Right	Tilt	2	15624	6	98.41	0.591	-	1.094	1.016	-	
5260	52	802.11a	OFDM	20	9.5	9.11	0.11	Left	Cheek	2	15624	6	98.41	0.456	-	1.094	1.016	-	
5260	52	802.11a	OFDM	20	9.5	9.11	-0.04	Left	Tilt	2	15624	6	98.41	0.374	-	1.094	1.016	-	
5580	116	802.11a	OFDM	20	9.5	9.49	0.20	Right	Cheek	1	15624	6	98.62	1.320	0.488	1.002	1.014	0.496	
5580	116	802.11a	OFDM	20	9.5	9.49	0.05	Right	Tilt	1	15624	6	98.62	0.761	0.295	1.002	1.014	0.300	
5580	116	802.11a	OFDM	20	9.5	9.49	0.03	Left	Cheek	1	15624	6	98.62	0.522	-	1.002	1.014	-	
5580	116	802.11a	OFDM	20	9.5	9.49	0.13	Left	Tilt	1	15624	6	98.62	0.353	-	1.002	1.014	-	
5500	100	802.11a	OFDM	20	9.5	9.26	0.05	Right	Cheek	2	15624	6	98.41	0.505	0.167	1.057	1.016	0.180	
5500	100	802.11a	OFDM	20	9.5	9.26	0.19	Right	Tilt	2	15624	6	98.41	0.501	-	1.057	1.016	-	
5500	100	802.11a	OFDM	20	9.5	9.26	0.07	Left	Cheek	2	15624	6	98.41	0.259	-	1.057	1.016	-	
5500	100	802.11a	OFDM	20	9.5	9.26	0.09	Left	Tilt	2	15624	6	98.41	0.207	-	1.057	1.016	-	
5745	149	802.11a	OFDM	20	9.5	9.42	0.12	Right	Cheek	1	15624	6	98.62	0.963	0.346	1.019	1.014	0.358	
5745	149	802.11a	OFDM	20	9.5	9.42	0.09	Right	Tilt	1	15624	6	98.62	0.659	-	1.019	1.014	-	
5745	149	802.11a	OFDM	20	9.5	9.42	0.05	Left	Cheek	1	15624	6	98.62	0.426	-	1.019	1.014	-	
5745	149	802.11a	OFDM	20	9.5	9.42	0.08	Left	Tilt	1	15624	6	98.62	0.266	-	1.019	1.014	-	
5825	165	802.11a	OFDM	20	9.5	9.25	0.20	Right	Cheek	2	15624	6	98.41	0.343	0.101	1.059	1.016	0.109	
5825	165	802.11a	OFDM	20	9.5	9.25	0.11	Right	Tilt	2	15624	6	98.41	0.326	-	1.059	1.016	-	
5825	165	802.11a	OFDM	20	9.5	9.25	0.12	Left	Cheek	2	15624	6	98.41	0.218	-	1.059	1.016	-	
5825	165	802.11a	OFDM	20	9.5	9.25	0.16	Left	Tilt	2	15624	6	98.41	0.167	-	1.059	1.016	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Head										
Spatial Peak									1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population									averaged over 1 gram										

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 79 of 103

11.2 Standalone Body-Worn SAR Data

Table 11-12
GSM/UMTS Body-Worn SAR Data

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.5	33.21	0.11	15 mm	15C02	1:8.3	back	0.217	1.069	0.232	A12
1880.00	661	GSM 1900	GSM	31.0	30.73	-0.04	15 mm	15C03	1:8.3	back	0.264	1.064	0.281	A14
836.60	4183	UMTS 850	RMC	24.5	23.95	0.02	15 mm	15C02	1:1	back	0.170	1.135	0.193	A16
1732.40	1412	UMTS 1750	RMC	24.5	23.73	-0.02	15 mm	15C00	1:1	back	0.506	1.194	0.604	A18
1880.00	9400	UMTS 1900	RMC	24.5	24.12	-0.03	15 mm	15C03	1:1	back	0.397	1.091	0.433	A20
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-13
LTE Body-Worn SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.0	24.30	-0.04	0	15C76	QPSK	1	0	15 mm	back	1:1	0.380	1.175	0.447	A22
707.50	23095	Mid	LTE Band 12	10	24.0	22.86	0.03	1	15C76	QPSK	25	0	15 mm	back	1:1	0.264	1.300	0.343	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.0	24.49	-0.04	0	15C76	QPSK	1	25	15 mm	back	1:1	0.285	1.125	0.321	A24
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.0	23.19	0.00	1	15C76	QPSK	25	0	15 mm	back	1:1	0.205	1.205	0.247	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	25.0	24.25	-0.03	0	15C09	QPSK	1	99	15 mm	back	1:1	0.536	1.189	0.637	A26
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.0	22.87	-0.01	1	15C09	QPSK	50	50	15 mm	back	1:1	0.419	1.297	0.543	
1900.00	19100	High	LTE Band 2 (PCS)	20	25.0	24.49	0.05	0	15C73	QPSK	1	50	15 mm	back	1:1	0.313	1.125	0.352	A28
1900.00	19100	High	LTE Band 2 (PCS)	20	24.0	23.13	0.03	1	15C73	QPSK	50	25	15 mm	back	1:1	0.247	1.222	0.302	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-14
DTS Body-Worn SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)	(W/kg)			
2437	6	802.11b	DSSS	22	17.5	17.38	-0.11	10 mm	1	15624	1	back	99.90	0.162	0.128	1.028	1.001	0.132	A30
2412	1	802.11b	DSSS	22	17.5	17.09	0.20	10 mm	2	15624	1	back	99.89	0.084	0.047	1.099	1.001	0.052	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-15
NII Body-Worn SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
5300	60	802.11a	OFDM	20	14.5	14.33	0.01	10 mm	1	15624	6	back	98.62	0.136	0.054	1.040	1.014	0.057	
5260	52	802.11n	OFDM	20	14.5	14.05	-0.03	10 mm	2	15624	6.5	back	98.40	0.483	0.181	1.109	1.016	0.204	A31
5580	116	802.11a	OFDM	20	14.5	14.23	0.17	10 mm	1	15624	6	back	98.62	0.140	0.050	1.064	1.014	0.054	
5500	100	802.11a	OFDM	20	14.5	14.19	0.03	10 mm	2	15624	6	back	98.41	0.138	0.046	1.074	1.016	0.050	
5660	132	802.11a	OFDM	20	14.5	14.35	0.12	10 mm	1	15624	6	back	98.62	0.148	0.052	1.035	1.014	0.055	
5745	149	802.11a	OFDM	20	14.5	14.31	0.03	10 mm	2	15624	6	back	98.41	0.065	0.020	1.045	1.016	0.021	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 80 of 103

11.3 Standalone Wireless Router SAR Data

Table 11-16
GPRS/UMTS Hotspot SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GPRS	31.5	30.86	-0.02	10 mm	15C75	2	1:4.15	back	0.360	1.159	0.417	
836.60	190	GSM 850	GPRS	31.5	30.86	0.01	10 mm	15C75	2	1:4.15	front	0.344	1.159	0.399	
836.60	190	GSM 850	GPRS	31.5	30.86	-0.07	10 mm	15C75	2	1:4.15	bottom	0.065	1.159	0.075	
836.60	190	GSM 850	GPRS	31.5	30.86	-0.02	10 mm	15C75	2	1:4.15	right	0.191	1.159	0.221	
836.60	190	GSM 850	GPRS	31.5	30.86	0.03	10 mm	15C75	2	1:4.15	left	0.561	1.159	0.650	A13
1880.00	661	GSM 1900	GPRS	30.0	29.13	-0.19	10 mm	15C01	2	1:4.15	back	0.345	1.222	0.422	
1880.00	661	GSM 1900	GPRS	30.0	29.13	-0.06	10 mm	15C01	2	1:4.15	front	0.322	1.222	0.393	
1880.00	661	GSM 1900	GPRS	30.0	29.13	-0.07	10 mm	15C01	2	1:4.15	bottom	0.414	1.222	0.506	A15
1880.00	661	GSM 1900	GPRS	30.0	29.13	0.05	10 mm	15C01	2	1:4.15	right	0.016	1.222	0.020	
1880.00	661	GSM 1900	GPRS	30.0	29.13	0.01	10 mm	15C01	2	1:4.15	left	0.066	1.222	0.081	
836.60	4183	UMTS 850	RMC	23.0	22.10	-0.06	10 mm	15C75	N/A	1:1	back	0.329	1.230	0.405	
836.60	4183	UMTS 850	RMC	23.0	22.10	0.04	10 mm	15C75	N/A	1:1	front	0.323	1.230	0.397	
836.60	4183	UMTS 850	RMC	23.0	22.10	0.16	10 mm	15C75	N/A	1:1	bottom	0.062	1.230	0.076	
836.60	4183	UMTS 850	RMC	23.0	22.10	-0.01	10 mm	15C75	N/A	1:1	right	0.189	1.230	0.232	
836.60	4183	UMTS 850	RMC	23.0	22.10	-0.01	10 mm	15C75	N/A	1:1	left	0.369	1.230	0.454	A17
1732.40	1412	UMTS 1750	RMC	21.0	20.50	-0.05	10 mm	15C75	N/A	1:1	back	0.424	1.122	0.476	
1732.40	1412	UMTS 1750	RMC	21.0	20.50	-0.04	10 mm	15C75	N/A	1:1	front	0.332	1.122	0.373	
1732.40	1412	UMTS 1750	RMC	21.0	20.50	-0.02	10 mm	15C75	N/A	1:1	bottom	0.505	1.122	0.567	A19
1732.40	1412	UMTS 1750	RMC	21.0	20.50	0.07	10 mm	15C75	N/A	1:1	right	0.030	1.122	0.034	
1732.40	1412	UMTS 1750	RMC	21.0	20.50	0.07	10 mm	15C75	N/A	1:1	left	0.088	1.122	0.099	
1880.00	9400	UMTS 1900	RMC	21.0	20.83	-0.01	10 mm	15C01	N/A	1:1	back	0.385	1.040	0.400	
1880.00	9400	UMTS 1900	RMC	21.0	20.83	-0.01	10 mm	15C01	N/A	1:1	front	0.308	1.040	0.320	
1880.00	9400	UMTS 1900	RMC	21.0	20.83	0.00	10 mm	15C01	N/A	1:1	bottom	0.508	1.040	0.528	A21
1880.00	9400	UMTS 1900	RMC	21.0	20.83	-0.01	10 mm	15C01	N/A	1:1	right	0.059	1.040	0.061	
1880.00	9400	UMTS 1900	RMC	21.0	20.83	0.06	10 mm	15C01	N/A	1:1	left	0.057	1.040	0.059	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 81 of 103

Table 11-17
LTE Band 12 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maxim um Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	23.5	22.70	-0.06	0	15C75	QPSK	1	25	10 mm	back	1:1	0.295	1.202	0.355	A23
707.50	23095	Mid	LTE Band 12	10	23.5	22.61	0.03	0	15C75	QPSK	25	12	10 mm	back	1:1	0.290	1.227	0.356	
707.50	23095	Mid	LTE Band 12	10	23.5	22.70	0.06	0	15C75	QPSK	1	25	10 mm	front	1:1	0.272	1.202	0.327	
707.50	23095	Mid	LTE Band 12	10	23.5	22.61	0.03	0	15C75	QPSK	25	12	10 mm	front	1:1	0.265	1.227	0.325	
707.50	23095	Mid	LTE Band 12	10	23.5	22.70	-0.02	0	15C75	QPSK	1	25	10 mm	bottom	1:1	0.061	1.202	0.073	
707.50	23095	Mid	LTE Band 12	10	23.5	22.61	0.04	0	15C75	QPSK	25	12	10 mm	bottom	1:1	0.058	1.227	0.071	
707.50	23095	Mid	LTE Band 12	10	23.5	22.70	0.01	0	15C75	QPSK	1	25	10 mm	right	1:1	0.219	1.202	0.263	
707.50	23095	Mid	LTE Band 12	10	23.5	22.61	0.01	0	15C75	QPSK	25	12	10 mm	right	1:1	0.217	1.227	0.266	
707.50	23095	Mid	LTE Band 12	10	23.5	22.70	-0.02	0	15C75	QPSK	1	25	10 mm	left	1:1	0.228	1.202	0.274	
707.50	23095	Mid	LTE Band 12	10	23.5	22.61	-0.01	0	15C75	QPSK	25	12	10 mm	left	1:1	0.235	1.227	0.288	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-18
LTE Band 5 (Cell) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.13	0.01	0	15C75	QPSK	1	0	10 mm	back	1:1	0.346	1.089	0.377	A25
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.03	0.10	0	15C75	QPSK	25	25	10 mm	back	1:1	0.292	1.114	0.325	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.13	-0.05	0	15C75	QPSK	1	0	10 mm	front	1:1	0.340	1.089	0.370	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.03	-0.10	0	15C75	QPSK	25	25	10 mm	front	1:1	0.290	1.114	0.323	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.13	0.07	0	15C75	QPSK	1	0	10 mm	bottom	1:1	0.061	1.089	0.066	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.03	0.01	0	15C75	QPSK	25	25	10 mm	bottom	1:1	0.051	1.114	0.057	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.13	0.02	0	15C75	QPSK	1	0	10 mm	right	1:1	0.129	1.089	0.140	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.03	0.01	0	15C75	QPSK	25	25	10 mm	right	1:1	0.101	1.114	0.113	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.13	0.01	0	15C75	QPSK	1	0	10 mm	left	1:1	0.240	1.089	0.261	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.5	23.03	0.02	0	15C75	QPSK	25	25	10 mm	left	1:1	0.211	1.114	0.235	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

Table 11-19
LTE Band 4 (AWS) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.48	0.05	0	15C75	QPSK	1	50	10 mm	back	1:1	0.362	1.265	0.458	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.09	-0.05	0	15C75	QPSK	50	25	10 mm	back	1:1	0.344	1.384	0.476	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.48	0.10	0	15C75	QPSK	1	50	10 mm	front	1:1	0.338	1.265	0.428	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.09	0.07	0	15C75	QPSK	50	25	10 mm	front	1:1	0.307	1.384	0.425	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.48	-0.18	0	15C75	QPSK	1	50	10 mm	bottom	1:1	0.609	1.265	0.770	A27
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.09	0.03	0	15C75	QPSK	50	25	10 mm	bottom	1:1	0.557	1.384	0.771	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.48	-0.04	0	15C75	QPSK	1	50	10 mm	right	1:1	0.024	1.265	0.030	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.09	-0.07	0	15C75	QPSK	50	25	10 mm	right	1:1	0.013	1.384	0.018	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.48	-0.20	0	15C75	QPSK	1	50	10 mm	left	1:1	0.130	1.265	0.164	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.09	-0.02	0	15C75	QPSK	50	25	10 mm	left	1:1	0.124	1.384	0.172	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 82 of 103	

Table 11-20
LTE Band 2 (PCS) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.81	-0.05	0	15C75	QPSK	1	50	10 mm	back	1:1	0.324	1.172	0.380	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.69	-0.04	0	15C75	QPSK	50	50	10 mm	back	1:1	0.302	1.205	0.364	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.81	0.00	0	15C75	QPSK	1	50	10 mm	front	1:1	0.260	1.172	0.305	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.69	0.05	0	15C75	QPSK	50	50	10 mm	front	1:1	0.243	1.205	0.293	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.81	0.05	0	15C75	QPSK	1	50	10 mm	bottom	1:1	0.420	1.172	0.492	A29
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.69	0.02	0	15C75	QPSK	50	50	10 mm	bottom	1:1	0.408	1.205	0.492	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.81	-0.16	0	15C75	QPSK	1	50	10 mm	right	1:1	0.019	1.172	0.022	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.69	0.10	0	15C75	QPSK	50	50	10 mm	right	1:1	0.023	1.205	0.028	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.81	-0.21	0	15C75	QPSK	1	50	10 mm	left	1:1	0.059	1.172	0.069	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.69	-0.02	0	15C75	QPSK	50	50	10 mm	left	1:1	0.059	1.205	0.071	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

Table 11-21
WLAN Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)	(W/kg)	(W/kg)		
2437	6	802.11b	OFDM	22	17.5	17.38	-0.11	10 mm	1	15624	1	back	99.9	0.162	0.128	1.028	1.001	0.132	A30
2437	6	802.11b	OFDM	22	17.5	17.38	0.07	10 mm	1	15624	1	front	99.9	0.139	-	1.028	1.001	-	
2437	6	802.11b	OFDM	22	17.5	17.38	0.00	10 mm	1	15624	1	top	99.9	0.142	-	1.028	1.001	-	
2437	6	802.11b	OFDM	22	17.5	17.38	0.00	10 mm	1	15624	1	left	99.9	0.104	-	1.028	1.001	-	
2412	1	802.11b	OFDM	22	17.5	17.09	0.20	10 mm	2	15624	1	back	99.9	0.084	0.047	1.099	1.001	0.052	
2412	1	802.11b	OFDM	22	17.5	17.09	0.03	10 mm	2	15624	1	front	99.9	0.015	-	1.099	1.001	-	
2412	1	802.11b	OFDM	22	17.5	17.09	0.13	10 mm	2	15624	1	top	99.9	0.005	-	1.099	1.001	-	
2412	1	802.11b	OFDM	22	17.5	17.09	0.18	10 mm	2	15624	1	left	99.9	0.003	-	1.099	1.001	-	
5745	149	802.11a	OFDM	20	14.5	14.19	0.04	10 mm	1	15624	6	back	98.6	0.170	-	1.074	1.014	-	
5745	149	802.11a	OFDM	20	14.5	14.19	-0.12	10 mm	1	15624	6	front	98.6	0.269	0.109	1.074	1.014	0.119	A32
5745	149	802.11a	OFDM	20	14.5	14.19	0.03	10 mm	1	15624	6	top	98.6	0.162	-	1.074	1.014	-	
5745	149	802.11a	OFDM	20	14.5	14.19	0.15	10 mm	1	15624	6	left	98.6	0.043	-	1.074	1.014	-	
5745	149	802.11a	OFDM	20	14.5	14.31	0.03	10 mm	2	15624	6	back	98.4	0.065	-	1.045	1.016	-	
5745	149	802.11a	OFDM	20	14.5	14.31	0.13	10 mm	2	15624	6	front	98.4	0.111	0.040	1.045	1.016	0.043	
5745	149	802.11a	OFDM	20	14.5	14.31	0.05	10 mm	2	15624	6	top	98.4	0.109	-	1.045	1.016	-	
5745	149	802.11a	OFDM	20	14.5	14.31	0.00	10 mm	2	15624	6	left	98.4	0.006	-	1.045	1.016	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 83 of 103

11.4 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2003, and FCC KDB Publication 447498 D01v05.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v05.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance. A test separation distance of 10 mm for body-worn SAR was also used for 2.4/5 GHz WLAN as it is more conservative.
7. Per FCC KDB Publication 648474 D04v01, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
8. Per FCC KDB 865664 D01 v01, variability SAR tests were not performed since the measured SAR results for a frequency band were less than 0.8 W/kg. Please see Section 13 for variability analysis.
9. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.6 for more details).
10. This device utilizes power reduction for all PCE modes under some portable hotspot conditions for SAR compliance. Therefore, all wireless router configurations were tested at reduced output power levels.

GSM Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D03v01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

UMTS Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03. HSPA SAR was not required per 3G Test Reduction Procedures.
2. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 84 of 103

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r01. The general test procedures used for testing can be found in Section 8.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per KDB Publication 941225 D05Av01r01, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

WLAN Notes:

1. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01DR02-41929 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.7.5 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01DR02-41929 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg. See Section 8.7.6 for more information.
4. Per KDB Publication 248227 D01DR02-41929, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498. Please see Section 12 for complete analysis.
5. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
6. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.
7. Only channels in the U-NII-2C (> 5.65 GHz WIFI) & U-NII-3 aggregate band that support wireless router were considered for hotspot SAR tests.
8. For SAR compliance, this device always uses power reduction when the device is in a held-to-ear RF exposure condition with WIFI data modes. Therefore, WIFI Head SAR was evaluated at reduced power levels.

FCC ID: A3LSMG925T	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset
		Page 85 of 103

12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v05r02 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05 IV.C.1.iii and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

When standalone SAR is not required to be measured, per FCC KDB 447498 D01v05 4.3.2 2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

Table 12-1
Estimated SAR

Mode	Frequency	Maximum Allowed Power	Separation Distance (Body)	Estimated SAR (Body)
	[MHz]	[dBm]	[mm]	[W/kg]
Bluetooth	2480	11.50	15	0.196

Note:

- Held-to-ear configurations are not applicable to Bluetooth operations and therefore were not considered for simultaneous transmission. Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.
- Since the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg, MIMO SAR is determined by the sum of 1g single transmission chain SAR values because the summation represents higher output power and yields more conservative result per KDB 248227 D01 DR02-41929.
- The highest Reported SAR for each exposure condition is used for SAR summation purpose.

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 86 of 103

12.3 Head SAR Simultaneous Transmission Analysis

Table 12-2
Simultaneous Transmission Scenario with 2.4 GHz WLAN – Ant 1 (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.127	0.512	0.639
	GSM 1900	0.092	0.512	0.604
	UMTS 850	0.116	0.512	0.628
	UMTS 1750	0.222	0.512	0.734
	UMTS 1900	0.181	0.512	0.693
	LTE Band 12	0.344	0.512	0.856
	LTE Band 5 (Cell)	0.164	0.512	0.676
	LTE Band 4 (AWS)	0.202	0.512	0.714
	LTE Band 2 (PCS)	0.180	0.512	0.692

Table 12-3
Simultaneous Transmission Scenario with 2.4 GHz WLAN – Ant 2 (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.127	0.136	0.263
	GSM 1900	0.092	0.136	0.228
	UMTS 850	0.116	0.136	0.252
	UMTS 1750	0.222	0.136	0.358
	UMTS 1900	0.181	0.136	0.317
	LTE Band 12	0.344	0.136	0.480
	LTE Band 5 (Cell)	0.164	0.136	0.300
	LTE Band 4 (AWS)	0.202	0.136	0.338
	LTE Band 2 (PCS)	0.180	0.136	0.316

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 87 of 103

Table 12-4
Simultaneous Transmission Scenario with 2.4 GHz WLAN – MIMO (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Head SAR	GSM 850	0.127	0.512	0.136	0.775
	GSM 1900	0.092	0.512	0.136	0.740
	UMTS 850	0.116	0.512	0.136	0.764
	UMTS 1750	0.222	0.512	0.136	0.870
	UMTS 1900	0.181	0.512	0.136	0.829
	LTE Band 12	0.344	0.512	0.136	0.992
	LTE Band 5 (Cell)	0.164	0.512	0.136	0.812
	LTE Band 4 (AWS)	0.202	0.512	0.136	0.850
	LTE Band 2 (PCS)	0.180	0.512	0.136	0.828

Table 12-5
Simultaneous Transmission Scenario with 5 GHz WLAN – Ant 1 (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.127	0.554	0.681
	GSM 1900	0.092	0.554	0.646
	UMTS 850	0.116	0.554	0.670
	UMTS 1750	0.222	0.554	0.776
	UMTS 1900	0.181	0.554	0.735
	LTE Band 12	0.344	0.554	0.898
	LTE Band 5 (Cell)	0.164	0.554	0.718
	LTE Band 4 (AWS)	0.202	0.554	0.756
	LTE Band 2 (PCS)	0.180	0.554	0.734

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 88 of 103	

Table 12-6
Simultaneous Transmission Scenario with 5 GHz WLAN – Ant 2 (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.127	0.292	0.419
	GSM 1900	0.092	0.292	0.384
	UMTS 850	0.116	0.292	0.408
	UMTS 1750	0.222	0.292	0.514
	UMTS 1900	0.181	0.292	0.473
	LTE Band 12	0.344	0.292	0.636
	LTE Band 5 (Cell)	0.164	0.292	0.456
	LTE Band 4 (AWS)	0.202	0.292	0.494
	LTE Band 2 (PCS)	0.180	0.292	0.472

Table 12-7
Simultaneous Transmission Scenario with 5 GHz WLAN – MIMO (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Head SAR	GSM 850	0.127	0.554	0.292	0.973
	GSM 1900	0.092	0.554	0.292	0.938
	UMTS 850	0.116	0.554	0.292	0.962
	UMTS 1750	0.222	0.554	0.292	1.068
	UMTS 1900	0.181	0.554	0.292	1.027
	LTE Band 12	0.344	0.554	0.292	1.190
	LTE Band 5 (Cell)	0.164	0.554	0.292	1.010
	LTE Band 4 (AWS)	0.202	0.554	0.292	1.048
	LTE Band 2 (PCS)	0.180	0.554	0.292	1.026

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 89 of 103	

12.4 Body-Worn Simultaneous Transmission Analysis

1. For SAR summation for body-worn back side at 15mm, the SAR values at 10mm for some transmission modes were used since the 10mm test distance was more conservative. "<" denotes that the 10mm SAR values were used for summation purposes.
2. Bluetooth SAR was not required to be measured per FCC KDB 447498. Estimated SAR results were used for SAR summation for body-worn back side at 15mm to determine simultaneous transmission SAR test exclusion.

Table 12-8
Simultaneous Transmission Scenario with 2.4 GHz WLAN - Ant 1 (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM 850	0.232	<0.132	<0.364
	GSM 1900	0.281	<0.132	<0.413
	UMTS 850	0.193	<0.132	<0.325
	UMTS 1750	0.604	<0.132	<0.736
	UMTS 1900	0.433	<0.132	<0.565
	LTE Band 12	0.447	<0.132	<0.579
	LTE Band 5 (Cell)	0.321	<0.132	<0.453
	LTE Band 4 (AWS)	0.637	<0.132	<0.769
	LTE Band 2 (PCS)	0.352	<0.132	<0.484

Table 12-9
Simultaneous Transmission Scenario with 2.4 GHz WLAN - Ant 2 (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM 850	0.232	<0.052	<0.284
	GSM 1900	0.281	<0.052	<0.333
	UMTS 850	0.193	<0.052	<0.245
	UMTS 1750	0.604	<0.052	<0.656
	UMTS 1900	0.433	<0.052	<0.485
	LTE Band 12	0.447	<0.052	<0.499
	LTE Band 5 (Cell)	0.321	<0.052	<0.373
	LTE Band 4 (AWS)	0.637	<0.052	<0.689
	LTE Band 2 (PCS)	0.352	<0.052	<0.404

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 90 of 103

Table 12-10
Simultaneous Transmission Scenario with 2.4 GHz WLAN - MIMO (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body-Worn	GSM 850	0.232	<0.132	<0.052	<0.416
	GSM 1900	0.281	<0.132	<0.052	<0.465
	UMTS 850	0.193	<0.132	<0.052	<0.377
	UMTS 1750	0.604	<0.132	<0.052	<0.788
	UMTS 1900	0.433	<0.132	<0.052	<0.617
	LTE Band 12	0.447	<0.132	<0.052	<0.631
	LTE Band 5 (Cell)	0.321	<0.132	<0.052	<0.505
	LTE Band 4 (AWS)	0.637	<0.132	<0.052	<0.821
	LTE Band 2 (PCS)	0.352	<0.132	<0.052	<0.536

Table 12-11
Simultaneous Transmission Scenario with 5 GHz WLAN - Ant 1 (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM 850	0.232	<0.057	<0.289
	GSM 1900	0.281	<0.057	<0.338
	UMTS 850	0.193	<0.057	<0.25
	UMTS 1750	0.604	<0.057	<0.661
	UMTS 1900	0.433	<0.057	<0.49
	LTE Band 12	0.447	<0.057	<0.504
	LTE Band 5 (Cell)	0.321	<0.057	<0.378
	LTE Band 4 (AWS)	0.637	<0.057	<0.694
	LTE Band 2 (PCS)	0.352	<0.057	<0.409

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset	Page 91 of 103	

Table 12-12
Simultaneous Transmission Scenario with 5 GHz WLAN - Ant 2 (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM 850	0.232	<0.204	<0.436
	GSM 1900	0.281	<0.204	<0.485
	UMTS 850	0.193	<0.204	<0.397
	UMTS 1750	0.604	<0.204	<0.808
	UMTS 1900	0.433	<0.204	<0.637
	LTE Band 12	0.447	<0.204	<0.651
	LTE Band 5 (Cell)	0.321	<0.204	<0.525
	LTE Band 4 (AWS)	0.637	<0.204	<0.841
	LTE Band 2 (PCS)	0.352	<0.204	<0.556

Table 12-13
Simultaneous Transmission Scenario with 5 GHz WLAN - MIMO (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body-Worn	GSM 850	0.232	<0.057	<0.204	<0.493
	GSM 1900	0.281	<0.057	<0.204	<0.542
	UMTS 850	0.193	<0.057	<0.204	<0.454
	UMTS 1750	0.604	<0.057	<0.204	<0.865
	UMTS 1900	0.433	<0.057	<0.204	<0.694
	LTE Band 12	0.447	<0.057	<0.204	<0.708
	LTE Band 5 (Cell)	0.321	<0.057	<0.204	<0.582
	LTE Band 4 (AWS)	0.637	<0.057	<0.204	<0.898
	LTE Band 2 (PCS)	0.352	<0.057	<0.204	<0.613

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 92 of 103

Table 12-14
Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM 850	0.232	0.196	0.428
	GSM 1900	0.281	0.196	0.477
	UMTS 850	0.193	0.196	0.389
	UMTS 1750	0.604	0.196	0.800
	UMTS 1900	0.433	0.196	0.629
	LTE Band 12	0.447	0.196	0.643
	LTE Band 5 (Cell)	0.321	0.196	0.517
	LTE Band 4 (AWS)	0.637	0.196	0.833
	LTE Band 2 (PCS)	0.352	0.196	0.548

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 93 of 103

12.5 Hotspot SAR Simultaneous Transmission Analysis

Table 12-15
Simultaneous Transmission Scenario 2.4 GHz WLAN – Ant 1 (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.650	0.132	0.782
	GPRS 1900	0.506	0.132	0.638
	UMTS 850	0.454	0.132	0.586
	UMTS 1750	0.567	0.132	0.699
	UMTS 1900	0.528	0.132	0.660
	LTE Band 12	0.356	0.132	0.488
	LTE Band 5 (Cell)	0.377	0.132	0.509
	LTE Band 4 (AWS)	0.771	0.132	0.903
	LTE Band 2 (PCS)	0.492	0.132	0.624

Table 12-16
Simultaneous Transmission Scenario 2.4 GHz WLAN – Ant 2 (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.650	0.052	0.702
	GPRS 1900	0.506	0.052	0.558
	UMTS 850	0.454	0.052	0.506
	UMTS 1750	0.567	0.052	0.619
	UMTS 1900	0.528	0.052	0.580
	LTE Band 12	0.356	0.052	0.408
	LTE Band 5 (Cell)	0.377	0.052	0.429
	LTE Band 4 (AWS)	0.771	0.052	0.823
	LTE Band 2 (PCS)	0.492	0.052	0.544

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 94 of 103

Table 12-17
Simultaneous Transmission Scenario 2.4 GHz WLAN – MIMO (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	GPRS 850	0.650	0.132	0.052	0.834
	GPRS 1900	0.506	0.132	0.052	0.690
	UMTS 850	0.454	0.132	0.052	0.638
	UMTS 1750	0.567	0.132	0.052	0.751
	UMTS 1900	0.528	0.132	0.052	0.712
	LTE Band 12	0.356	0.132	0.052	0.540
	LTE Band 5 (Cell)	0.377	0.132	0.052	0.561
	LTE Band 4 (AWS)	0.771	0.132	0.052	0.955
	LTE Band 2 (PCS)	0.492	0.132	0.052	0.676

Table 12-18
Simultaneous Transmission Scenario 5 GHz WLAN – Ant 1 (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.650	0.119	0.769
	GPRS 1900	0.506	0.119	0.625
	UMTS 850	0.454	0.119	0.573
	UMTS 1750	0.567	0.119	0.686
	UMTS 1900	0.528	0.119	0.647
	LTE Band 12	0.356	0.119	0.475
	LTE Band 5 (Cell)	0.377	0.119	0.496
	LTE Band 4 (AWS)	0.771	0.119	0.890
	LTE Band 2 (PCS)	0.492	0.119	0.611

Table 12-19
Simultaneous Transmission Scenario 5 GHz WLAN – Ant 2 (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.650	0.043	0.693
	GPRS 1900	0.506	0.043	0.549
	UMTS 850	0.454	0.043	0.497
	UMTS 1750	0.567	0.043	0.610
	UMTS 1900	0.528	0.043	0.571
	LTE Band 12	0.356	0.043	0.399
	LTE Band 5 (Cell)	0.377	0.043	0.420
	LTE Band 4 (AWS)	0.771	0.043	0.814
	LTE Band 2 (PCS)	0.492	0.043	0.535

Table 12-20
Simultaneous Transmission Scenario 5 GHz WLAN – MIMO (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	GPRS 850	0.650	0.119	0.043	0.812
	GPRS 1900	0.506	0.119	0.043	0.668
	UMTS 850	0.454	0.119	0.043	0.616
	UMTS 1750	0.567	0.119	0.043	0.729
	UMTS 1900	0.528	0.119	0.043	0.690
	LTE Band 12	0.356	0.119	0.043	0.518
	LTE Band 5 (Cell)	0.377	0.119	0.043	0.539
	LTE Band 4 (AWS)	0.771	0.119	0.043	0.933
	LTE Band 2 (PCS)	0.492	0.119	0.043	0.654

12.6 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v05 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 96 of 103

13 SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r01, SAR measurement variability is assessed for each frequency band when measured SAR is > 0.80 W/kg. All measured SAR for this device was < 0.80 W/kg, thus no variability SAR measurements were needed.

13.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01, the extended measurement uncertainty analysis per IEEE 1528-2003 was not required.

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 97 of 103

14 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Gigatronics	80701A	(0.05-18GHz) Power Sensor	10/30/2014	Annual	10/30/2015	1833460
Agilent	E8257D	(250kHz-20GHz) Signal Generator	4/15/2014	Annual	4/15/2015	MY45470194
Agilent	8753E	(30kHz-6GHz) Network Analyzer	12/30/2014	Annual	12/30/2015	JP38020182
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	8648D	(9kHz-4GHz) Signal Generator	4/15/2014	Annual	4/15/2015	3629U00687
SPEAG	D750V3	750 MHz Dipole	3/17/2014	Annual	3/17/2015	1054
SPEAG	D835V2	835 MHz SAR Dipole	7/24/2014	Annual	7/24/2015	4d133
SPEAG	D1765V2	1765 MHz SAR Dipole	5/7/2014	Annual	5/7/2015	1008
SPEAG	D1900V2	1900 MHz SAR Dipole	7/23/2014	Annual	7/23/2015	5d149
SPEAG	D2450V2	2450 MHz SAR Dipole	8/11/2014	Annual	8/11/2015	719
SPEAG	D5GHZV2	5 GHz SAR Dipole	2/26/2014	Annual	2/26/2015	1120
SPEAG	D5GHZV2	5 GHz SAR Dipole	9/25/2014	Annual	9/25/2015	1191
Rohde & Schwarz	CMU200	Base Station Simulator	4/24/2014	Annual	4/24/2015	836371/0079
Rohde & Schwarz	CMU200	Base Station Simulator	6/6/2014	Annual	6/6/2015	109892
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/26/2014	Annual	2/26/2015	665
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/17/2014	Annual	3/17/2015	1334
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/11/2014	Annual	4/11/2015	1368
SPEAG	DAE4	Dasy Data Acquisition Electronics	5/14/2014	Annual	5/14/2015	859
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/17/2014	Annual	9/17/2015	1323
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/18/2014	Annual	9/18/2015	1364
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/6/2014	Annual	5/6/2015	1070
Mitutoyo	CD-6°CSX	Digital Caliper	5/8/2014	Biennial	5/8/2016	13264162
Fisher Scientific	15-077-960	Digital Thermometer	12/4/2013	Biennial	12/4/2015	130764551
Fisher Scientific	15-077-960	Digital Thermometer	12/4/2013	Biennial	12/4/2015	130764558
Agilent	E4438C	ESG Vector Signal Generator	3/31/2014	Annual	3/31/2015	MY42082659
Agilent	E4438C	ESG Vector Signal Generator	4/1/2014	Annual	4/1/2015	MY47270002
Control Company	61220-416	Long-Stem Thermometer	4/29/2014	Biennial	4/29/2016	111331323
Agilent	N9020A	MXA Signal Analyzer	10/27/2014	Annual	10/27/2015	US46470561
Agilent	N5182A	MXG Vector Signal Generator	4/15/2014	Annual	4/15/2015	MY47420800
Agilent	N5182A	MXG Vector Signal Generator	4/15/2014	Annual	4/15/2015	MY47420651
Anritsu	ML2495A	Power Meter	10/31/2013	Biennial	10/31/2015	941001
Anritsu	MA2411B	Pulse Power Sensor	3/25/2014	Annual	3/25/2015	1207470
Anritsu	MA2411B	Pulse Power Sensor	11/13/2014	Annual	11/13/2015	1339018
Anritsu	MT8820C	Radio Communication Analyzer	5/6/2014	Annual	5/6/2015	6201144419
Anritsu	MT8820C	Radio Communication Analyzer	8/28/2014	Annual	8/28/2015	6201240328
Rohde & Schwarz	CMW500	Radio Communication Tester	10/4/2013	Biennial	10/4/2015	103962
Rohde & Schwarz	CMW500	Radio Communication Tester	10/4/2013	Biennial	10/4/2015	108798
Tektronix	RSA6114A	Real Time Spectrum Analyzer	4/16/2014	Annual	4/16/2015	8010177
SPEAG	ES3DV3	SAR Probe	9/18/2014	Annual	9/18/2015	3332
SPEAG	ES3DV3	SAR Probe	2/25/2014	Annual	2/25/2015	3258
SPEAG	ES3DV3	SAR Probe	3/19/2014	Annual	3/19/2015	3209
SPEAG	ES3DV3	SAR Probe	5/15/2014	Annual	5/15/2015	3263
SPEAG	ES3DV3	SAR Probe	9/24/2014	Annual	9/24/2015	3288
SPEAG	EX3DV4	SAR Probe	12/12/2014	Annual	12/12/2015	3920
Agilent	8753ES	S-Parameter Network Analyzer	5/22/2014	Annual	5/22/2015	US39170118
Fisher Scientific	S97611	Thermometer	4/12/2013	Biennial	4/12/2015	130219303
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/18/2014	Biennial	3/18/2016	N/A
Gigatronics	8651A	Universal Power Meter	10/30/2014	Annual	10/30/2015	8650319
VWR	36934-158	Wall-Mounted Thermometer	8/8/2013	Biennial	8/8/2015	130477877
VWR	36934-158	Wall-Mounted Thermometer	8/8/2013	Biennial	8/8/2015	130477866
Agilent	E5515C	Wireless Communications Test Set	11/4/2014	Biennial	11/4/2016	GB43193563
Agilent	E5515C	Wireless Communications Test Set	11/20/2014	Biennial	11/20/2016	GB43163447
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433972
COMTech	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M155A00-009
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A

Note:

1. CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.
2. Each equipment item was used solely within its respective calibration period.

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 98 of 103

15 MEASUREMENT UNCERTAINTIES

Applicable for frequencies less than 3000 MHz:

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.0	N	1	1.0	1.0	6.0	6.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)							RSS	12.1	11.7
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.2	23.5

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 99 of 103

Applicable for frequencies up to 6 GHz:

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)							RSS	12.4	12.0
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.7	24.0

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 100 of 103

16 CONCLUSION

16.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: A3LSMG925T		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 101 of 103

17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 102 of 103

- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v01r02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: A3LSMG925T	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1501190154-R1.A3L	Test Dates: 01/19/15 - 02/02/15	DUT Type: Portable Handset		Page 103 of 103

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C02

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.934 \text{ S/m}$; $\epsilon_r = 43.416$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 01-19-2015; Ambient Temp: 23.1°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3263; ConvF(6.23, 6.23, 6.23); Calibrated: 5/15/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/14/2014

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 850, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.71 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.119 W/kg

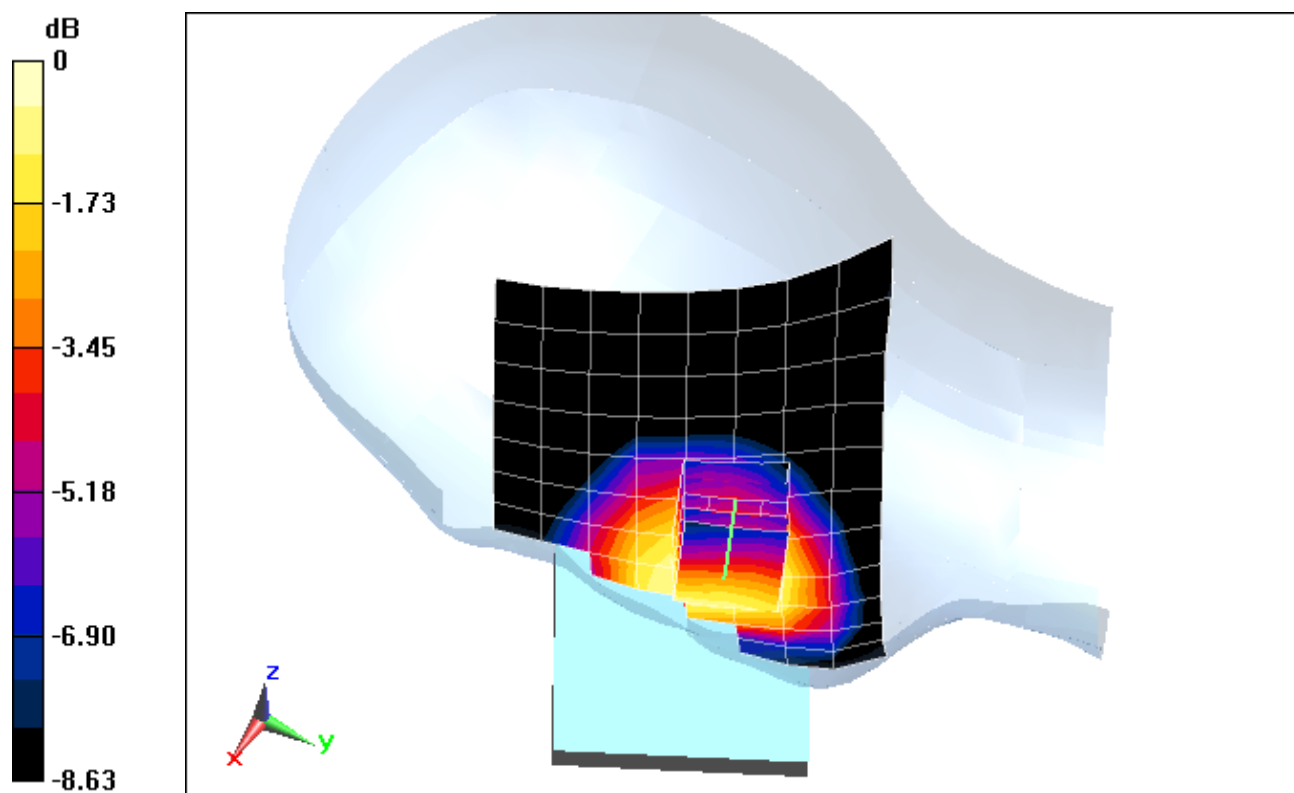

0 dB = 0.130 W/kg = -8.86 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C03

Communication System: UID 0, GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.392$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 01-19-2015; Ambient Temp: 24.4°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3258; ConvF(5.04, 5.04, 5.04); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 1900, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.833 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.139 W/kg

SAR(1 g) = 0.086 W/kg

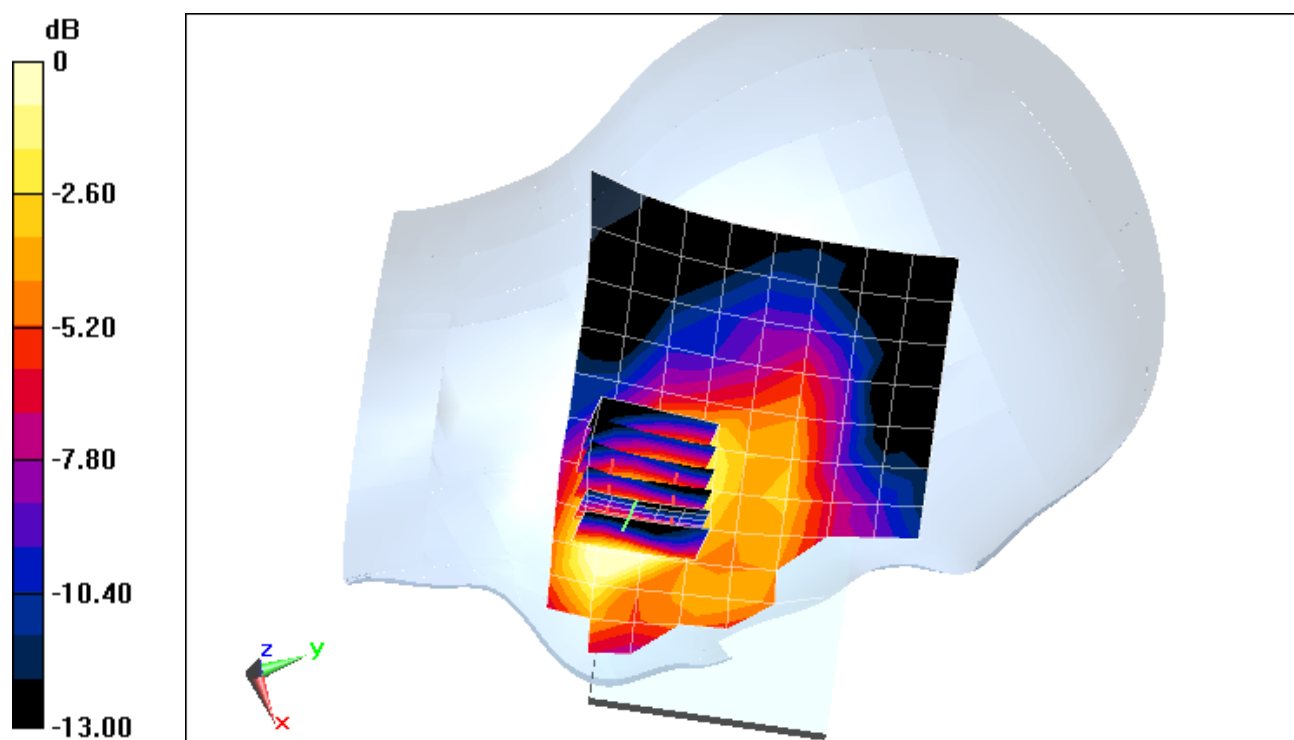

0 dB = 0.105 W/kg = -9.79 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C02

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.934 \text{ S/m}$; $\epsilon_r = 43.416$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 01-19-2015; Ambient Temp: 23.1°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3263; ConvF(6.23, 6.23, 6.23); Calibrated: 5/15/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/14/2014

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.74 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.102 W/kg

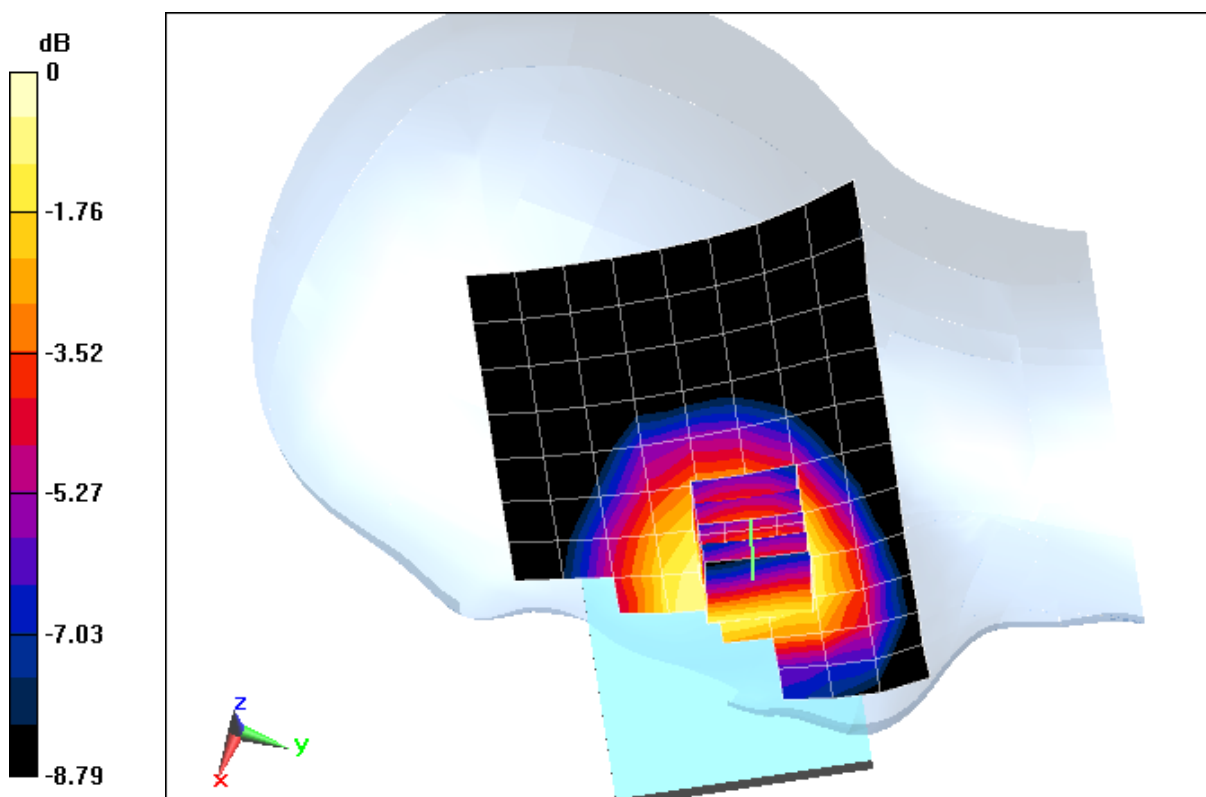

0 dB = 0.109 W/kg = -9.63 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C00

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1732.4$ MHz; $\sigma = 1.327$ S/m; $\epsilon_r = 38.54$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 01-22-2015; Ambient Temp: 23.0°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3263; ConvF(5.41, 5.41, 5.41); Calibrated: 5/15/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/14/2014

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: AWS UMTS, Right Head, Cheek, Mid.ch


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.51 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.279 W/kg

SAR(1 g) = 0.186 W/kg

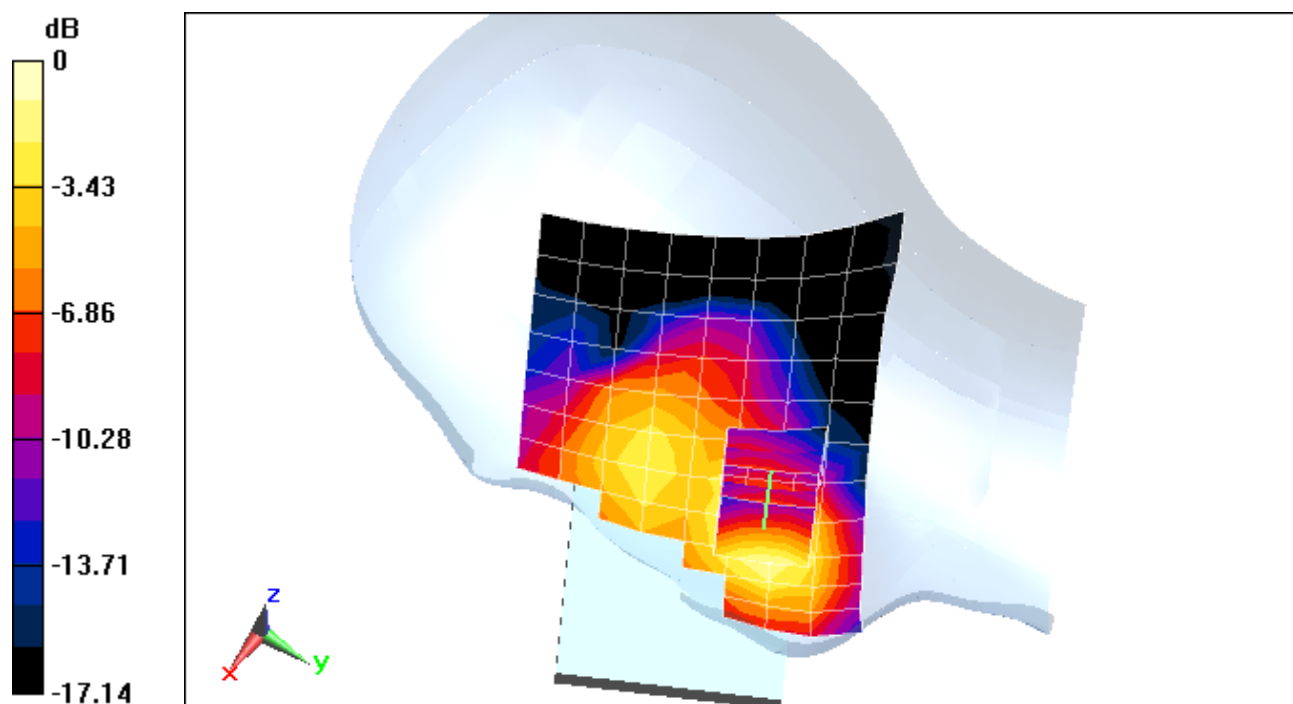

0 dB = 0.219 W/kg = -6.60 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C03

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 39.392$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 01-19-2015; Ambient Temp: 24.4°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3258; ConvF(5.04, 5.04, 5.04); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.43 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.258 W/kg

SAR(1 g) = 0.166 W/kg

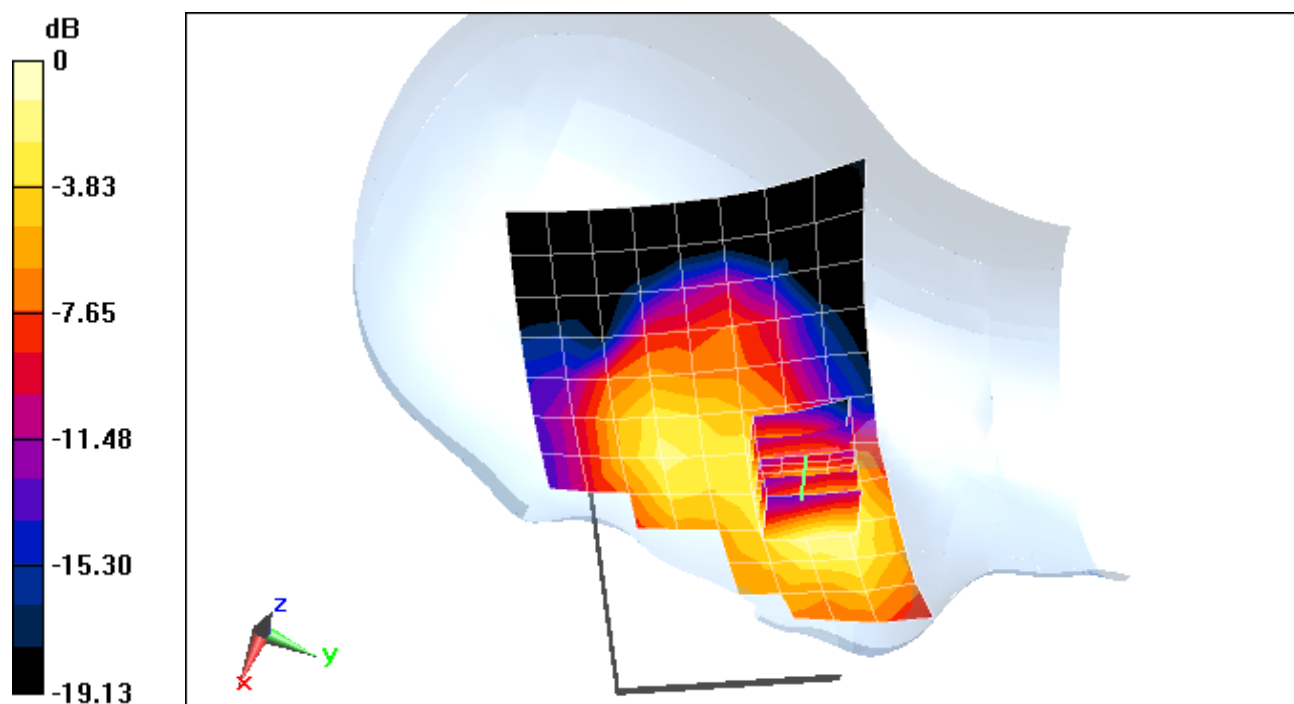

0 dB = 0.193 W/kg = -7.14 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C76

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.861 \text{ S/m}$; $\epsilon_r = 41.507$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 01-19-2015; Ambient Temp: 24.2°C; Tissue Temp: 21.3°C

Probe: ES3DV3 - SN3288; ConvF(6.81, 6.81, 6.81); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 12, Left Head, Cheek, Mid.ch, QPSK,
10 MHz Bandwidth, 1 RB, 0 RB Offset**


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.57 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.293 W/kg

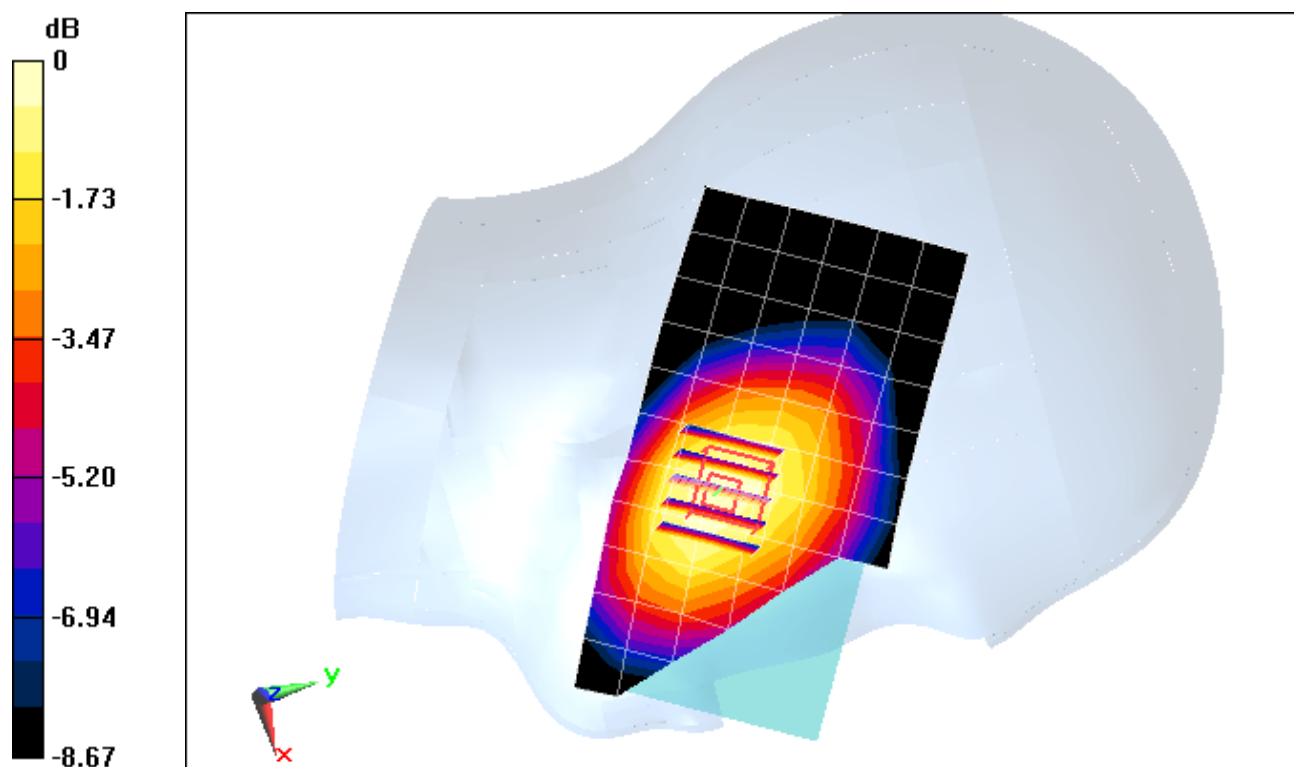

0 dB = 0.317 W/kg = -4.99 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C76

Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.5$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 43.418$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 01-19-2015; Ambient Temp: 23.1°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3263; ConvF(6.23, 6.23, 6.23); Calibrated: 5/15/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/14/2014

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 5 (Cell.), Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.3 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.177 W/kg

SAR(1 g) = 0.146 W/kg

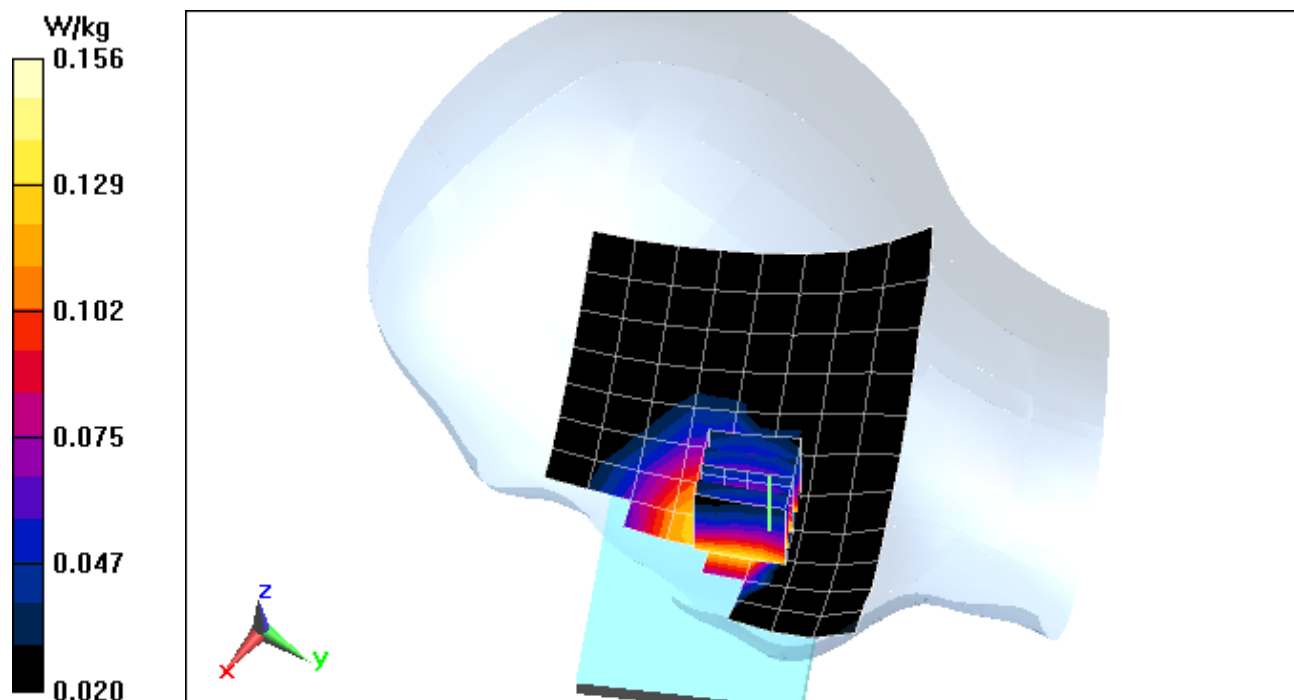

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C09

Communication System: UID 0, LTE RF Band 4; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1732.5$ MHz; $\sigma = 1.327$ S/m; $\epsilon_r = 38.539$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 01-22-2015; Ambient Temp: 23.0°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3263; ConvF(5.41, 5.41, 5.41); Calibrated: 5/15/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/14/2014

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Right Head, Cheek, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.72 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.256 W/kg

SAR(1 g) = 0.170 W/kg

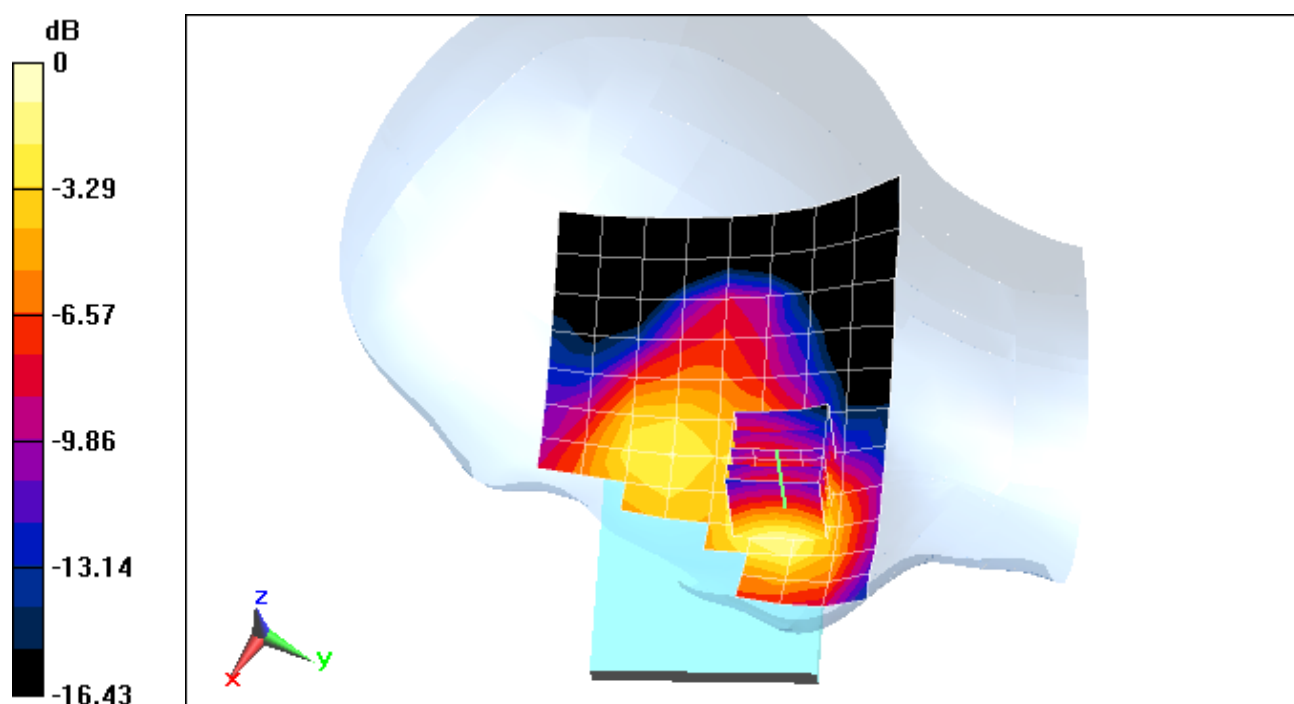

0 dB = 0.199 W/kg = -7.01 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C73

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 39.285$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 01-19-2015; Ambient Temp: 24.4°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3258; ConvF(5.04, 5.04, 5.04); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 2 (PCS), Right Head, Cheek, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.18 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.246 W/kg

SAR(1 g) = 0.160 W/kg

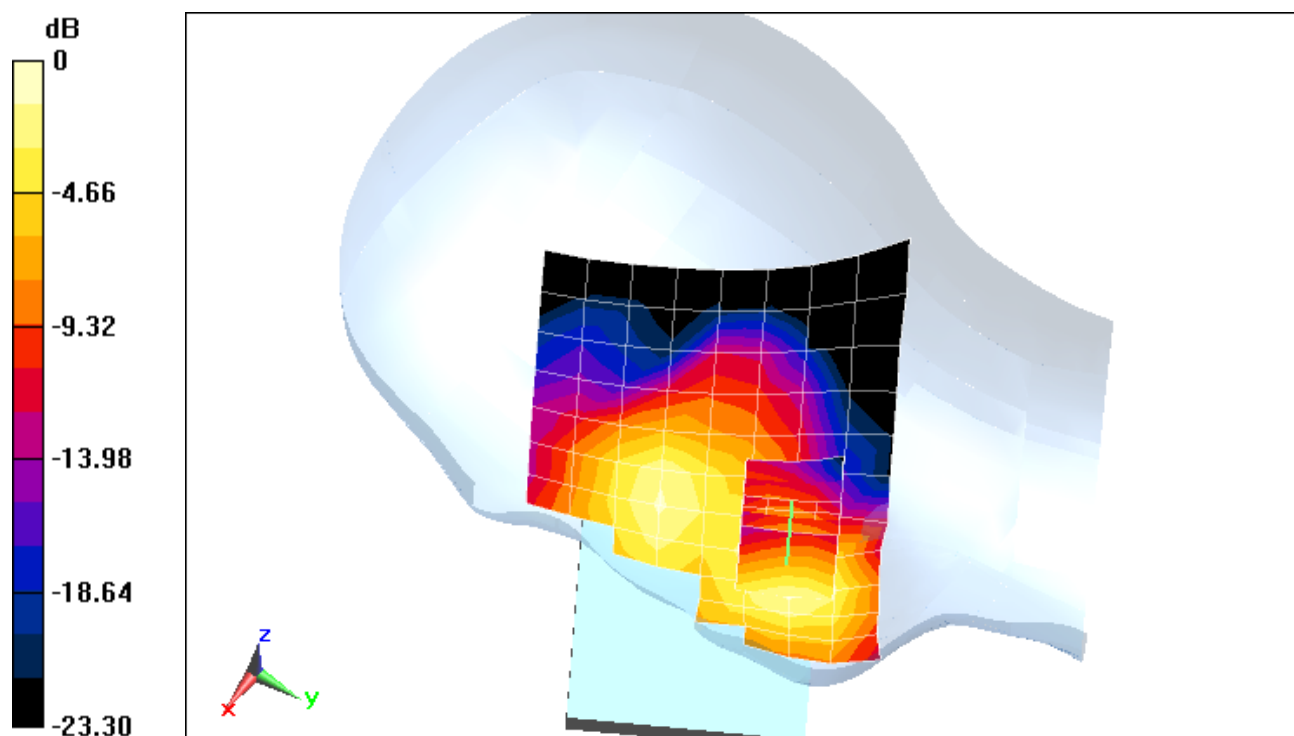

0 dB = 0.188 W/kg = -7.26 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15624

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 1.783 \text{ S/m}$; $\epsilon_r = 38.008$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 02-02-2015; Ambient Temp: 24.1°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3258; ConvF(4.52, 4.52, 4.52); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, 22 MHz Bandwidth, Ant 1,
Right Head, Cheek, Ch 06, 1 Mbps**


Area Scan (9x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.50 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.507 W/kg

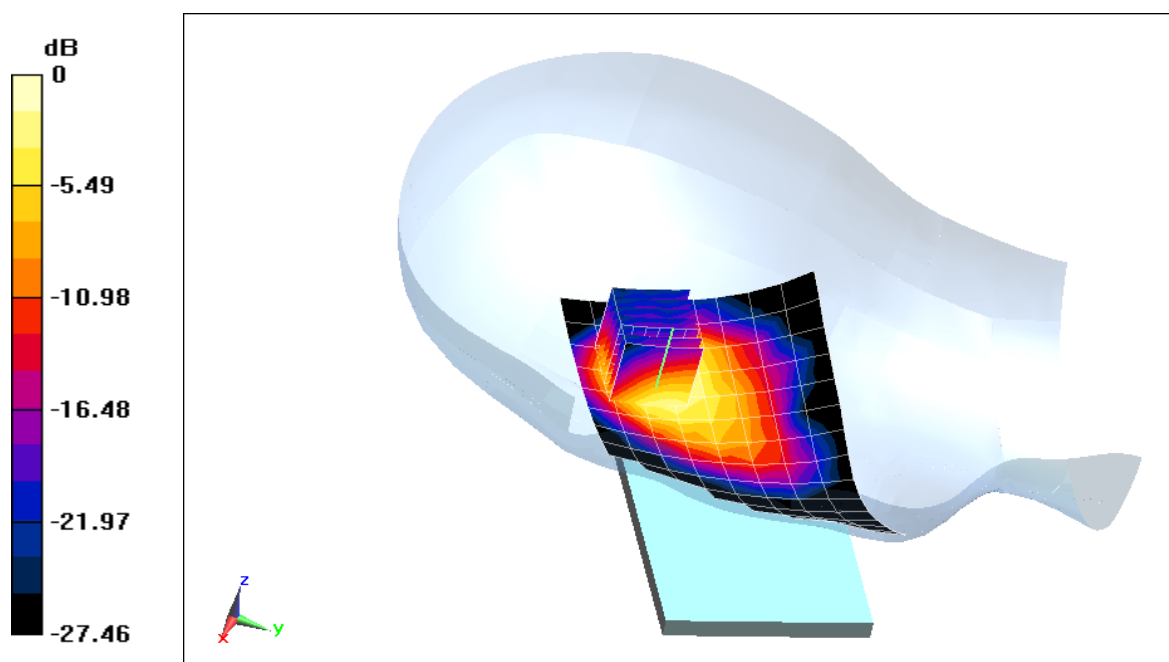

0 dB = 0.664 W/kg = -1.78 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15624

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head Medium parameters used:

$f = 5320 \text{ MHz}$; $\sigma = 4.658 \text{ S/m}$; $\epsilon_r = 37.09$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 01-27-2015; Ambient Temp: 24.5°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3920; ConvF(4.69, 4.69, 4.69); Calibrated: 12/12/2014;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/11/2014

Phantom: SAM, Left; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11a, U-NII-2A, 20 MHz Bandwidth, Ant 1,
Right Head, Cheek, Ch 64, 6 Mbps**


Area Scan (13x22x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 10.05 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 2.49 W/kg

SAR(1 g) = 0.545 W/kg

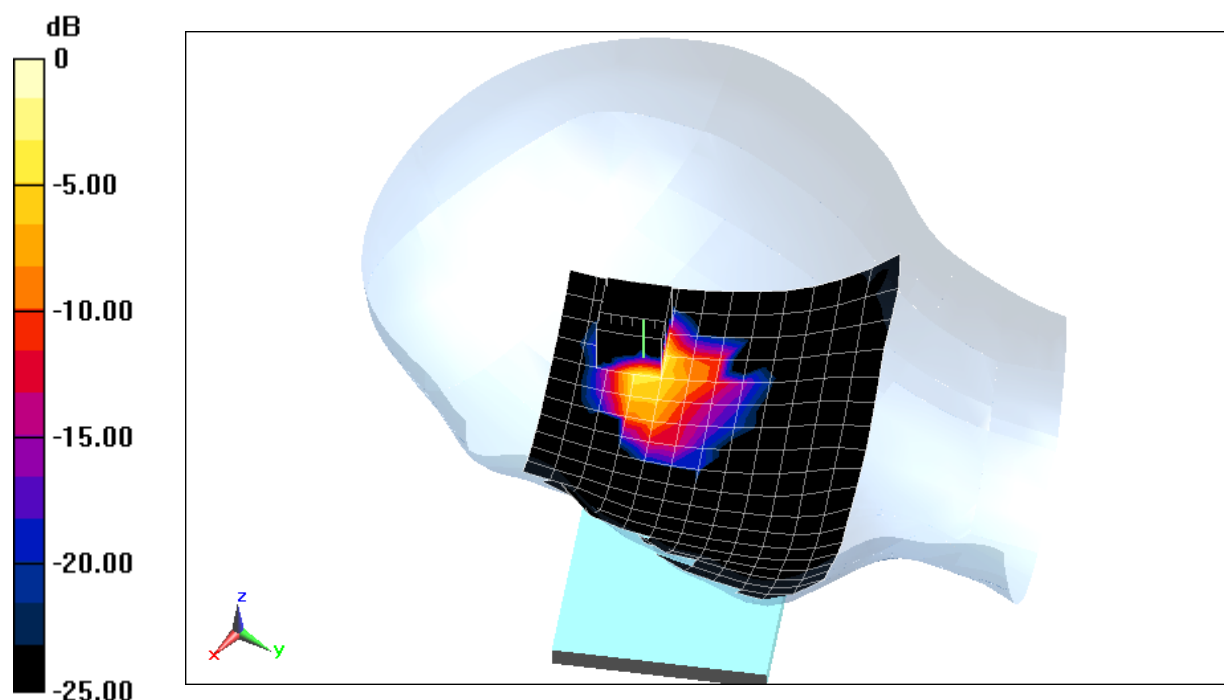

0 dB = 1.40 W/kg = 1.46 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C02

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 1.011$ S/m; $\epsilon_r = 55.28$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-22-2015; Ambient Temp: 24.2°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3288; ConvF(6.32, 6.32, 6.32); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 850, Body SAR, Back Side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.13 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.315 W/kg

SAR(1 g) = 0.217 W/kg

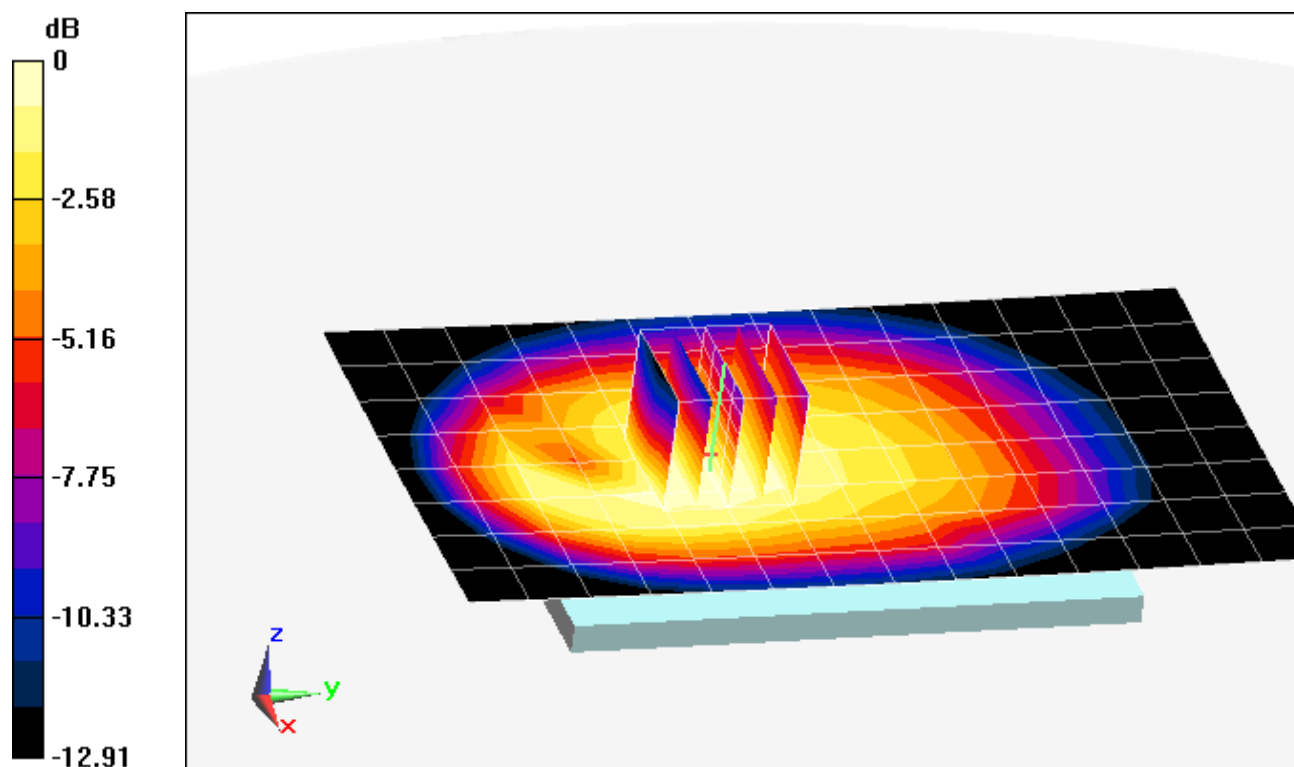

0 dB = 0.245 W/kg = -6.11 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C75

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 1.011$ S/m; $\epsilon_r = 55.28$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-22-2015; Ambient Temp: 24.2°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3288; ConvF(6.32, 6.32, 6.32); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 850, Body SAR, Left Edge, Mid.ch, 2 Tx Slots


Area Scan (10x13x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.42 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.561 W/kg

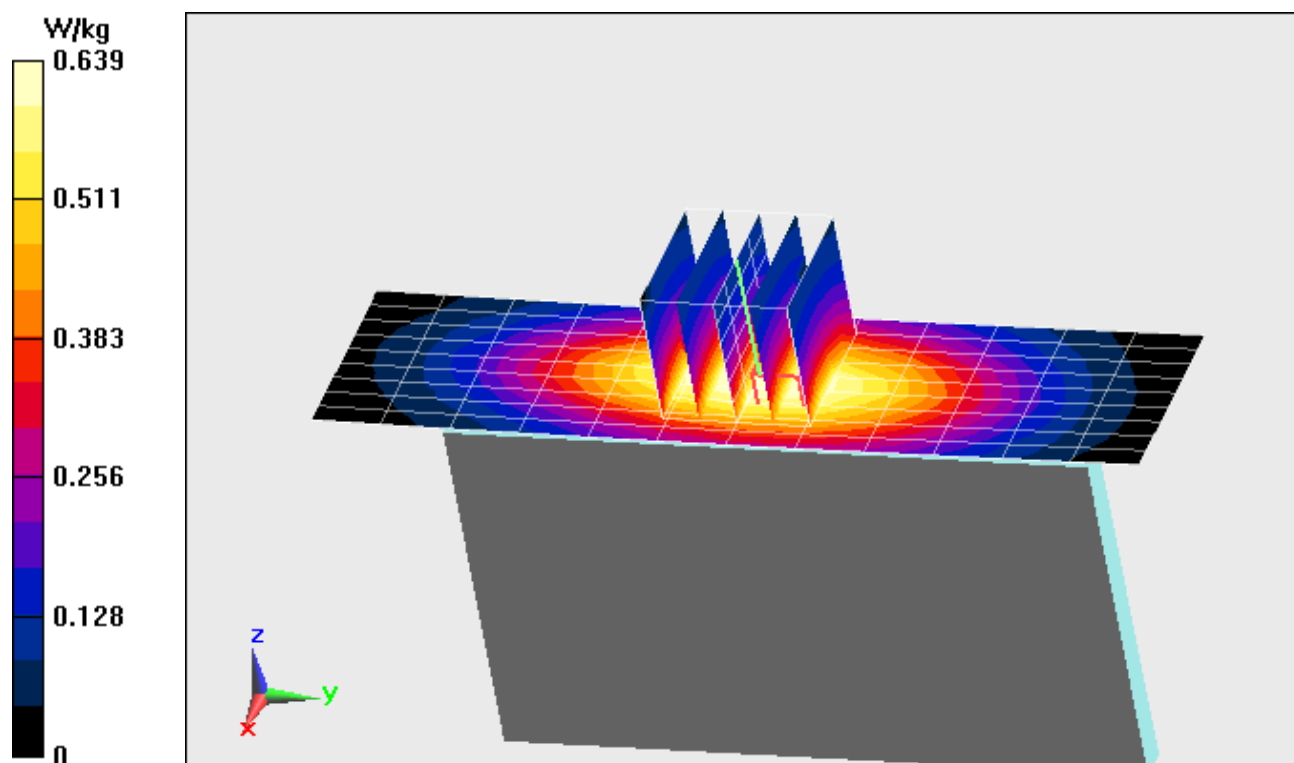

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C03

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.522 \text{ S/m}$; $\epsilon_r = 51.716$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Space: 1.5 cm

Test Date: 01-22-2015; Ambient Temp: 23.9°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3258; ConvF(4.61, 4.61, 4.61); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.65 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.423 W/kg

SAR(1 g) = 0.264 W/kg

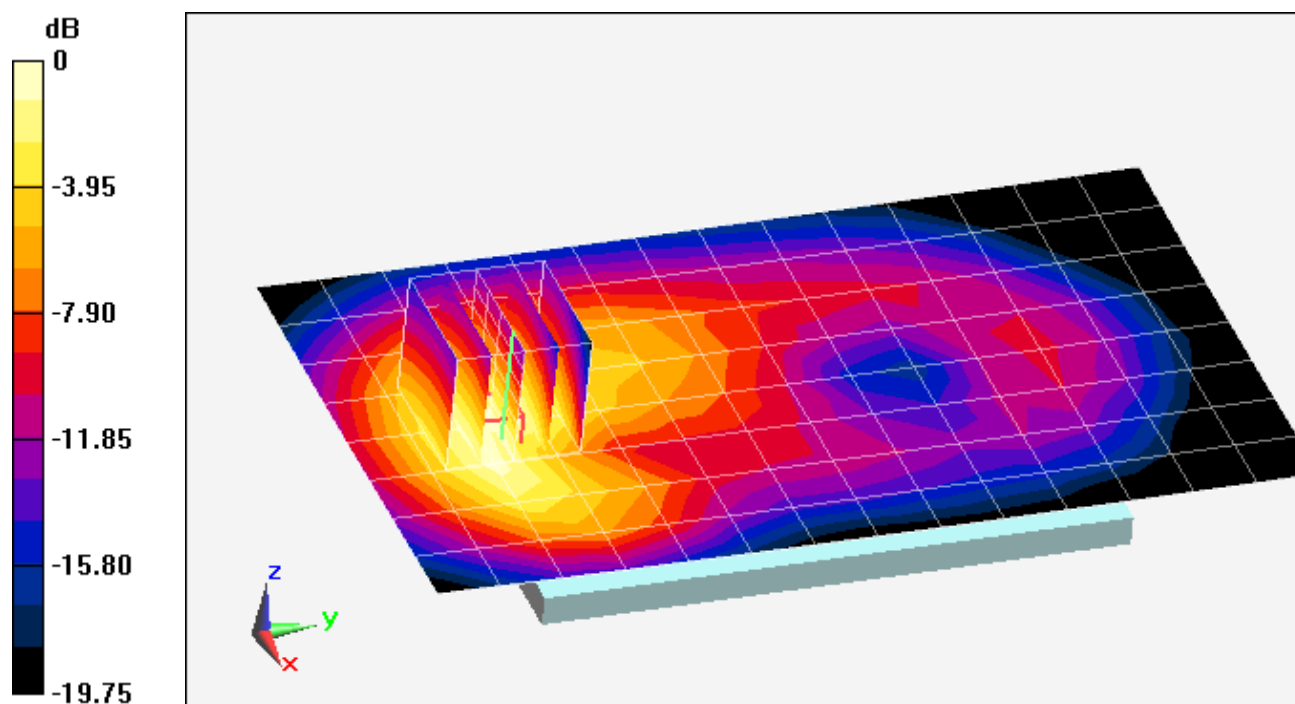

0 dB = 0.312 W/kg = -5.06 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C01

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.522 \text{ S/m}$; $\epsilon_r = 51.716$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Space: 1.0 cm

Test Date: 01-22-2015; Ambient Temp: 23.9°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3258; ConvF(4.61, 4.61, 4.61); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 1900, Body SAR, Bottom Edge, Mid.ch, 2 Tx Slots


Area Scan (13x8x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.45 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.676 W/kg

SAR(1 g) = 0.414 W/kg

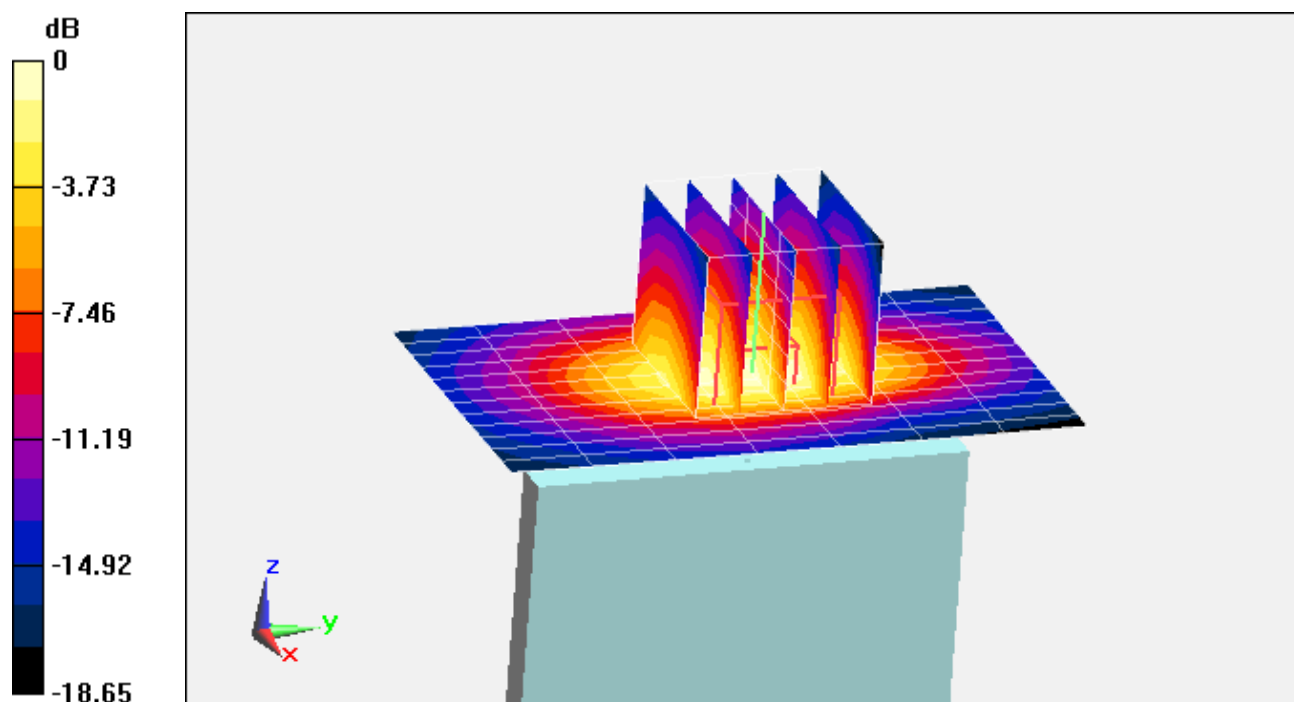

0 dB = 0.512 W/kg = -2.91 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C02

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 1.011$ S/m; $\epsilon_r = 55.28$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Space: 1.5 cm

Test Date: 01-22-2015; Ambient Temp: 24.2°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3288; ConvF(6.32, 6.32, 6.32); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Body SAR, Back Side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.45 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.170 W/kg

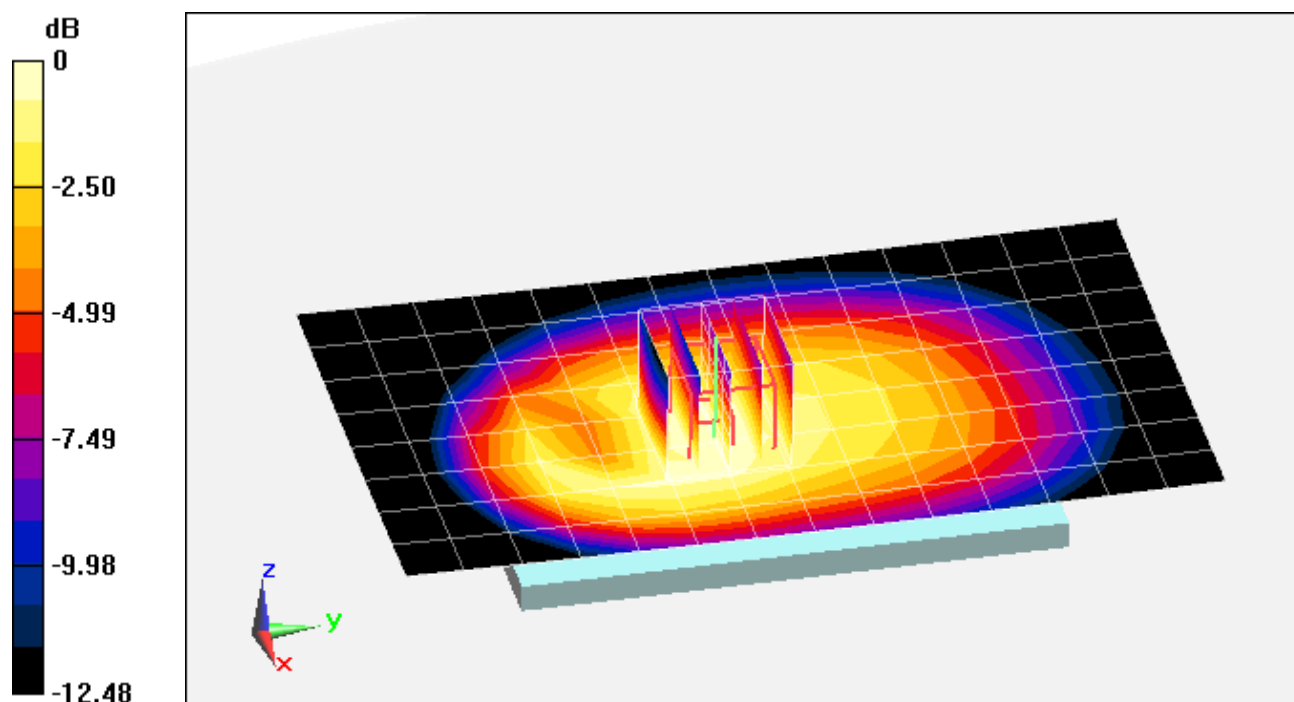

0 dB = 0.190 W/kg = -7.21 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C75

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 1.011$ S/m; $\epsilon_r = 55.28$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Space: 1.0 cm

Test Date: 01-22-2015; Ambient Temp: 24.2°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3288; ConvF(6.32, 6.32, 6.32); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Body SAR, Left Edge, Mid.ch


Area Scan (10x13x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.89 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.526 W/kg

SAR(1 g) = 0.369 W/kg

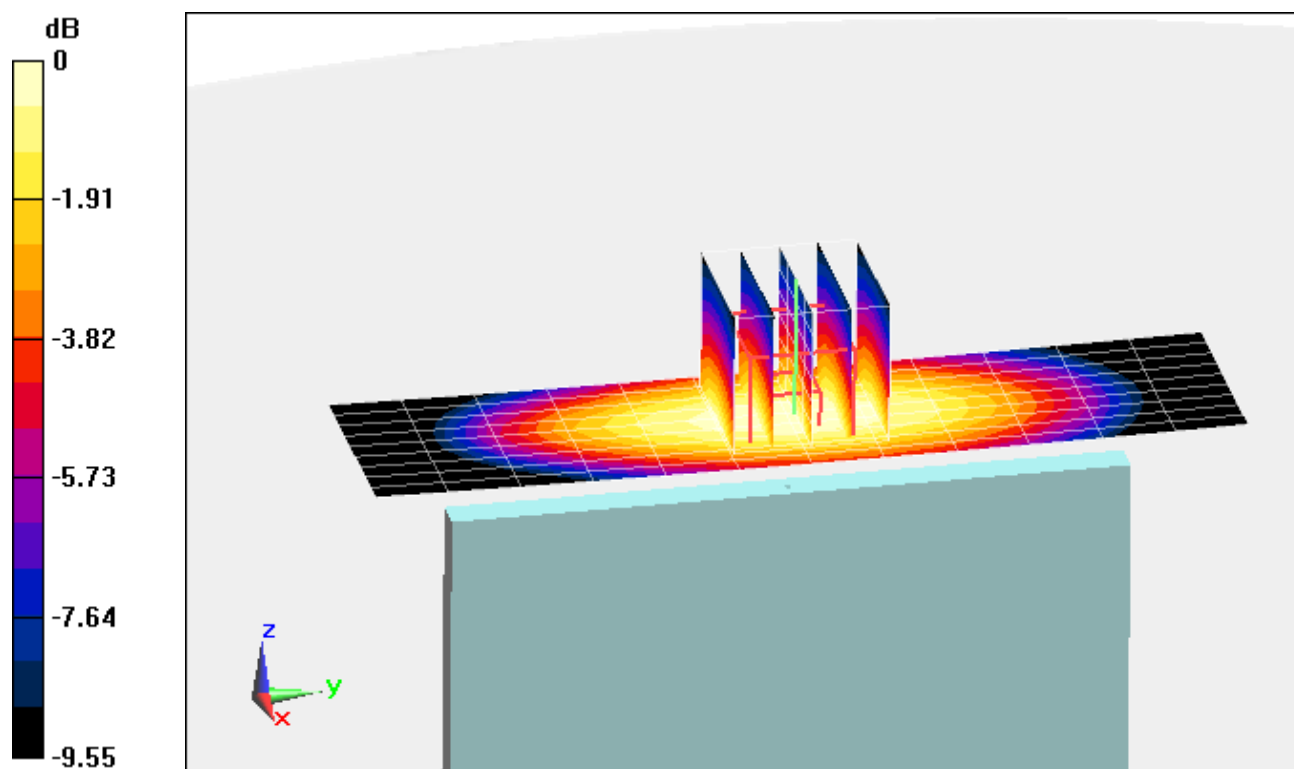

0 dB = 0.425 W/kg = -3.72 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C00

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.4$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 51.982$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-22-2015; Ambient Temp: 24.2°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3263; ConvF(4.98, 4.98, 4.98); Calibrated: 5/15/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/14/2014

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: AWS UMTS, Body SAR, Back side, Mid.ch


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.82 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.767 W/kg

SAR(1 g) = 0.506 W/kg

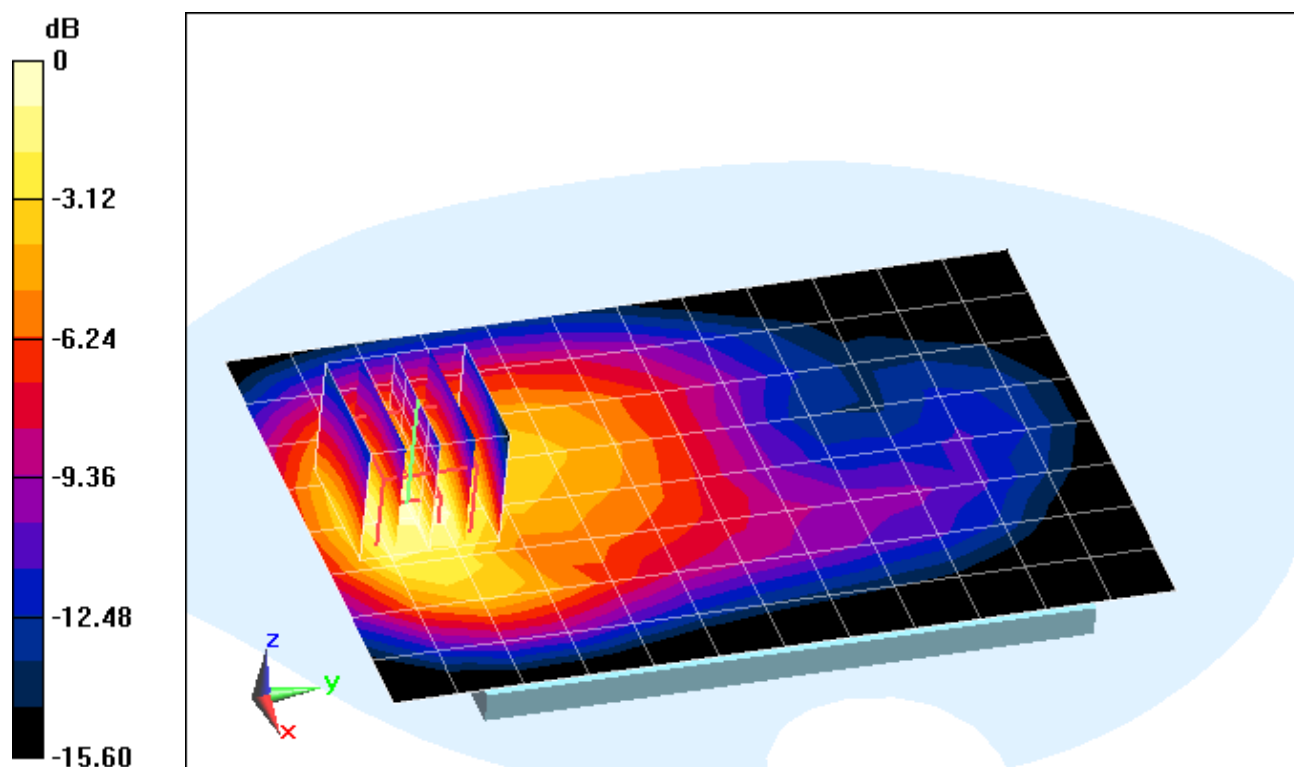

0 dB = 0.598 W/kg = -2.23 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C75

Communication System: UID 0, UMTS (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.4$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 51.982$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Space: 1.0 cm

Test Date: 01-22-2015; Ambient Temp: 24.2°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3263; ConvF(4.98, 4.98, 4.98); Calibrated: 5/15/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/14/2014

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: AWS UMTS, Body SAR, Bottom Edge, Mid.ch


Area Scan (13x9x1): Measurement grid: dx=5mm, dy=15mm

/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.18 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.829 W/kg

SAR(1 g) = 0.505 W/kg

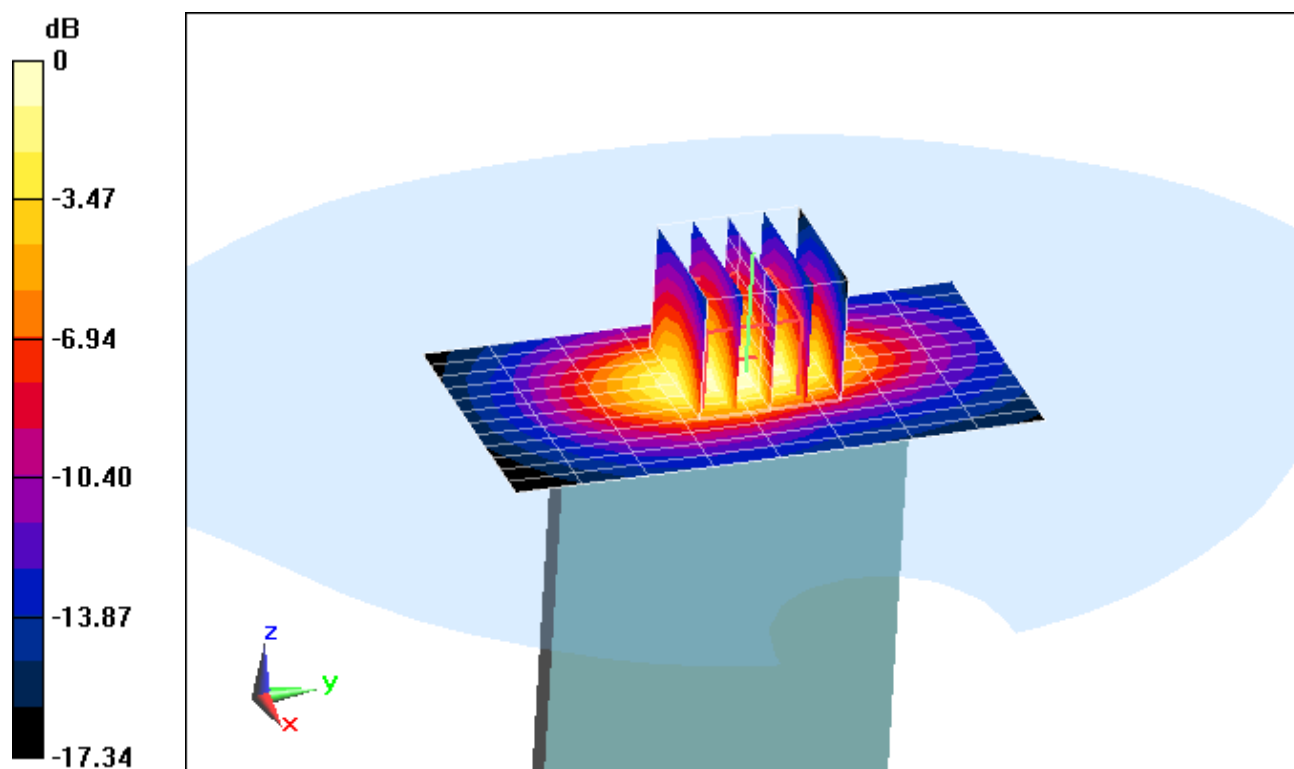

0 dB = 0.620 W/kg = -2.08 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C03

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body, Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.522 \text{ S/m}$; $\epsilon_r = 51.716$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-22-2015; Ambient Temp: 23.9°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3258; ConvF(4.61, 4.61, 4.61); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.03 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.611 W/kg

SAR(1 g) = 0.397 W/kg

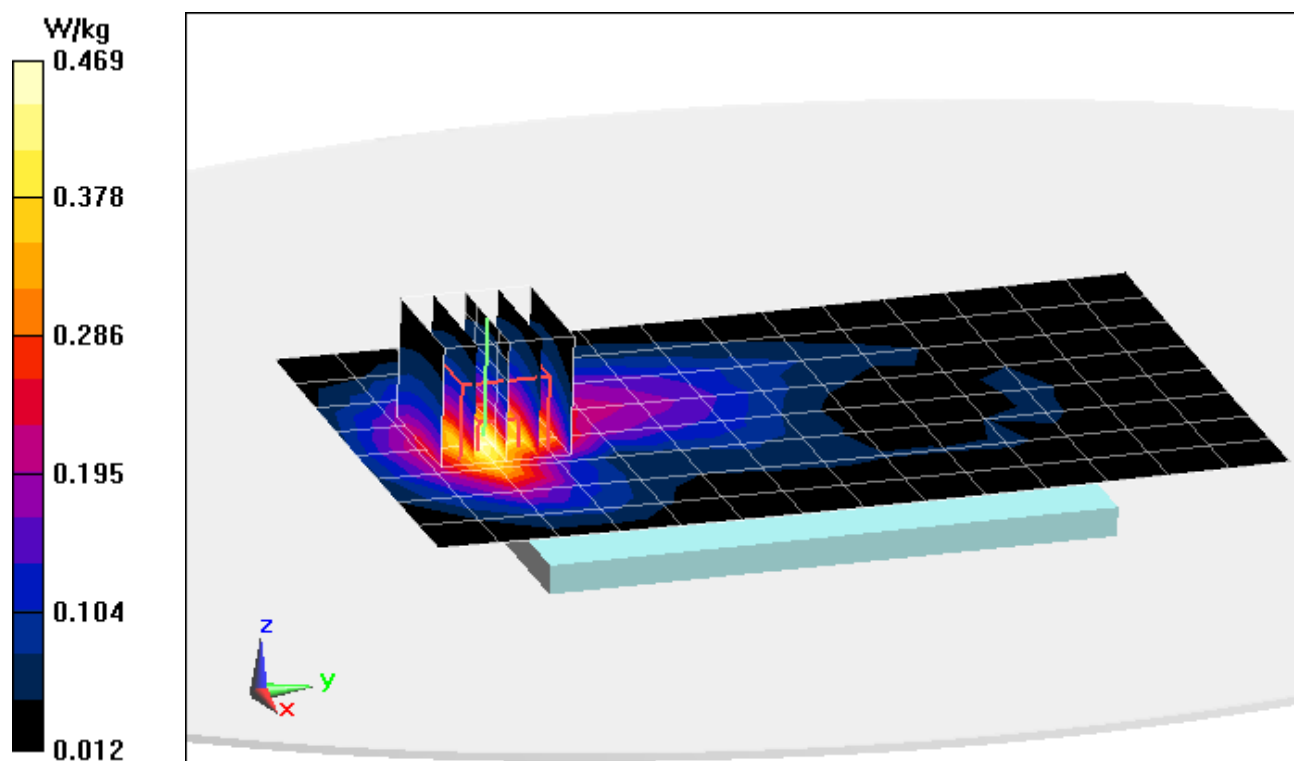

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C01

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body, Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.522 \text{ S/m}$; $\epsilon_r = 51.716$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-22-2015; Ambient Temp: 23.9°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3258; ConvF(4.61, 4.61, 4.61); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Body SAR, Bottom Edge, Mid.ch


Area Scan (10x9x1): Measurement grid: $dx=5\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.45 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.849 W/kg

SAR(1 g) = 0.508 W/kg

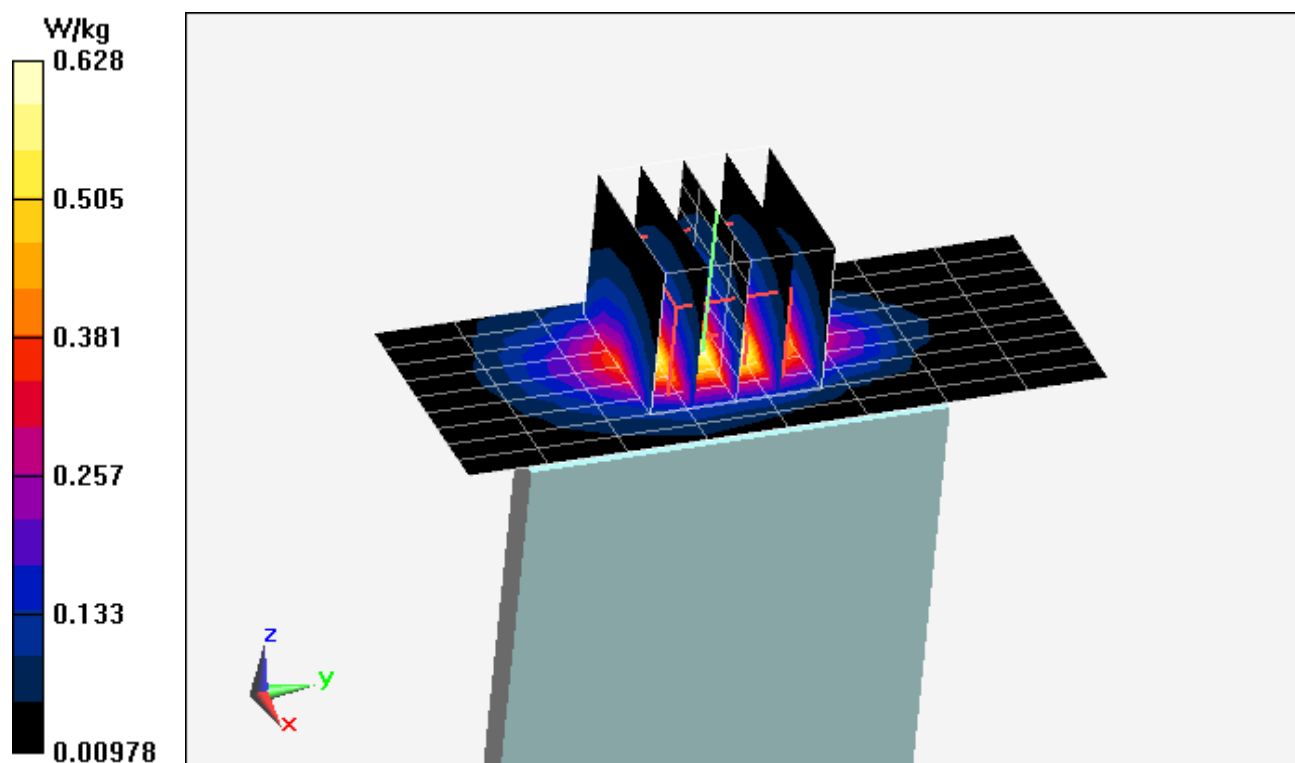

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C76

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 740 Body, Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.924 \text{ S/m}$; $\epsilon_r = 53.716$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Space: 1.5 cm

Test Date: 01-22-2015; Ambient Temp: 23.2°C; Tissue Temp: 23.4°C

Probe: ES3DV3 - SN3332; ConvF(6.24, 6.24, 6.24); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.40 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.493 W/kg

SAR(1 g) = 0.380 W/kg

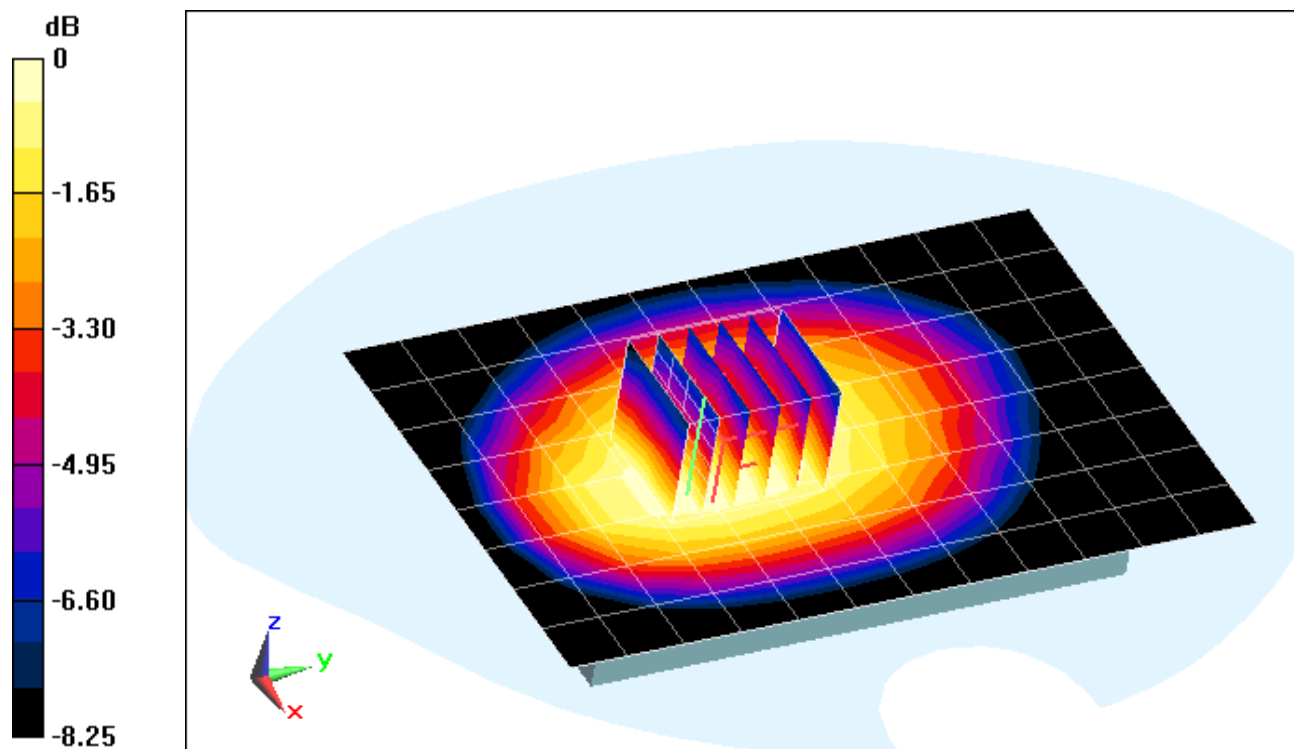

0 dB = 0.421 W/kg = -3.76 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C75

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 740 Body, Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.924 \text{ S/m}$; $\epsilon_r = 53.716$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-22-2015; Ambient Temp: 23.2°C; Tissue Temp: 23.4°C

Probe: ES3DV3 - SN3332; ConvF(6.24, 6.24, 6.24); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.57 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.404 W/kg

SAR(1 g) = 0.295 W/kg

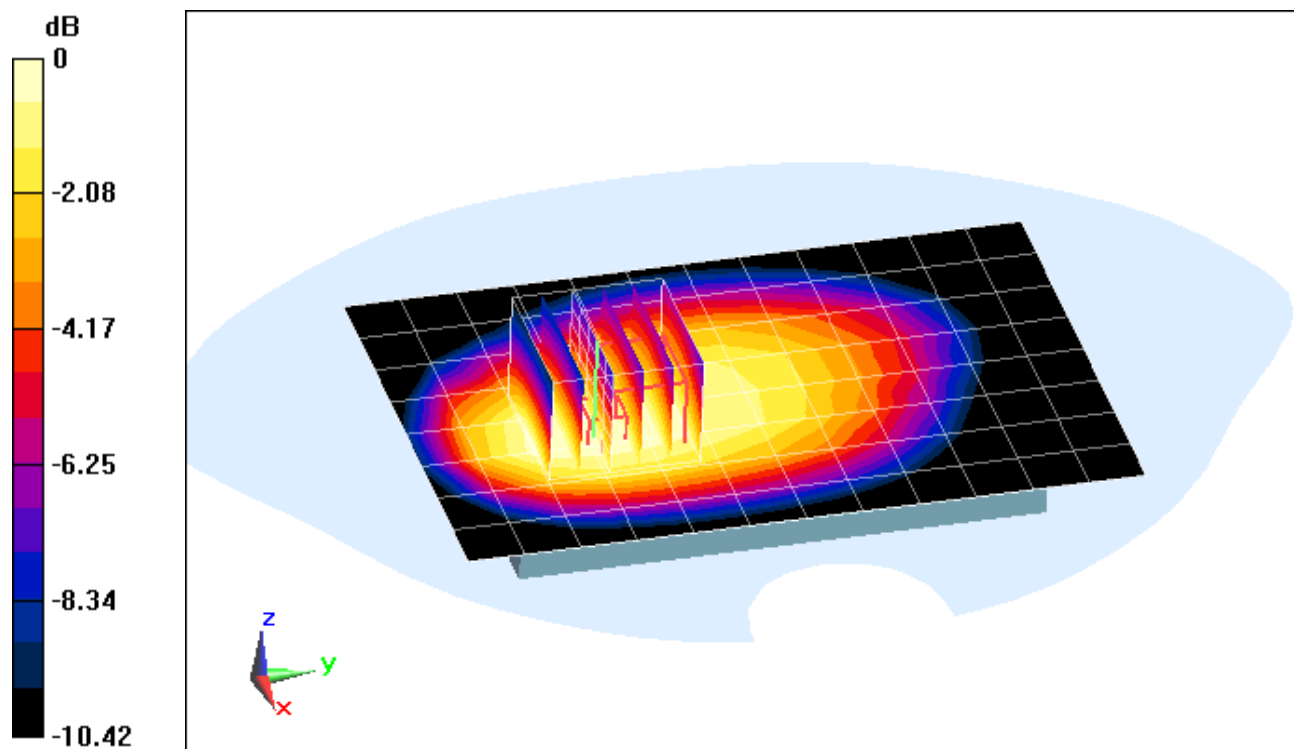

0 dB = 0.326 W/kg = -4.87 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C76

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body, Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 1.011 \text{ S/m}$; $\epsilon_r = 55.28$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Space: 1.5 cm

Test Date: 01-22-2015; Ambient Temp: 24.2°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3288; ConvF(6.32, 6.32, 6.32); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 5 (Cell.), Body SAR, Back Side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.49 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.372 W/kg

SAR(1 g) = 0.285 W/kg

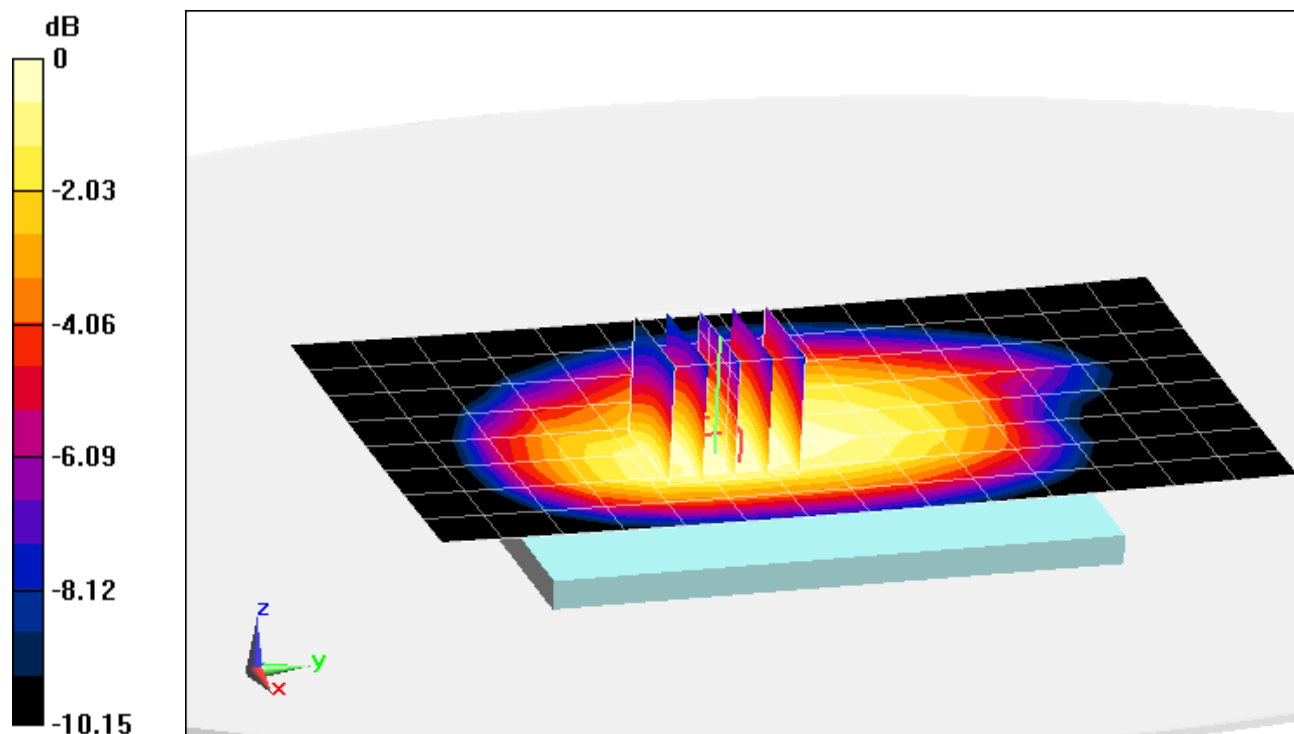

0 dB = 0.316 W/kg = -5.00 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C75

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body, Medium parameters used (interpolated):

$f = 836.5$ MHz; $\sigma = 1.011$ S/m; $\epsilon_r = 55.28$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Space: 1.0 cm

Test Date: 01-22-2015; Ambient Temp: 24.2°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3288; ConvF(6.32, 6.32, 6.32); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 5 (Cell.), Body SAR, Back Side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.32 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.346 W/kg

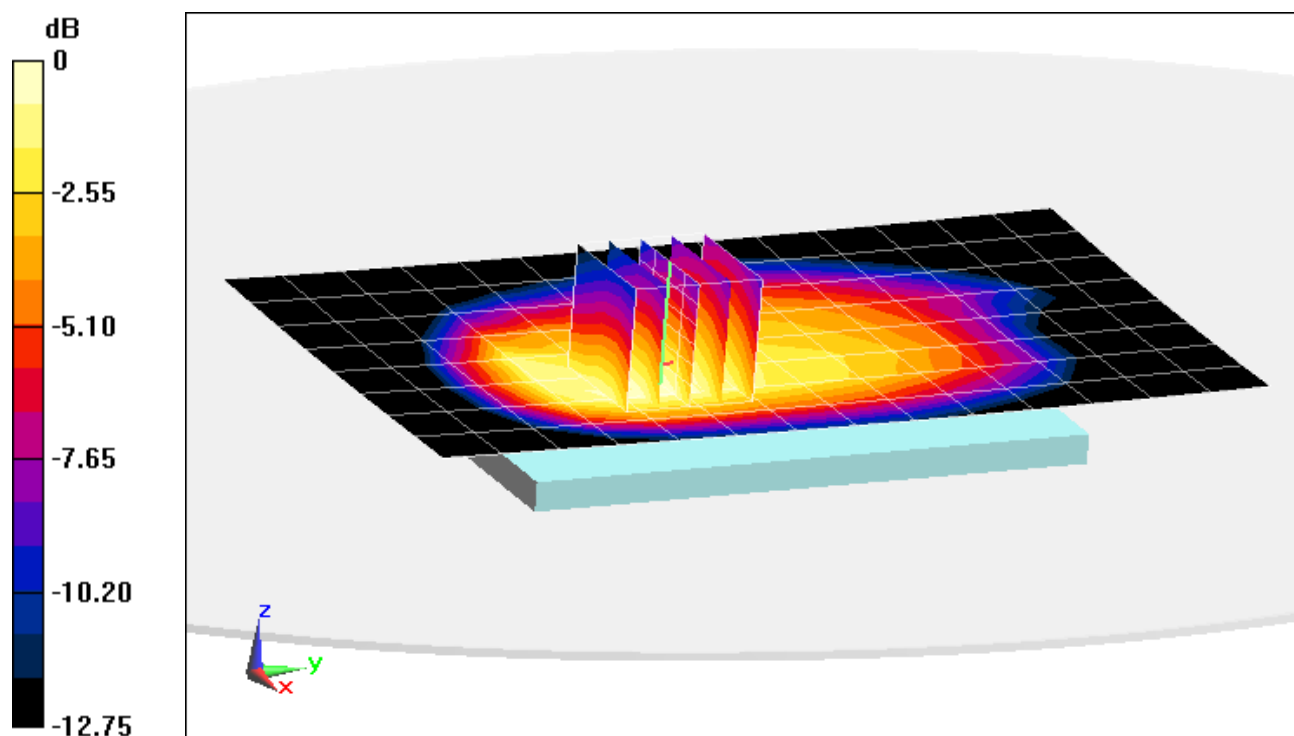

0 dB = 0.392 W/kg = -4.07 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C09

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body, Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.442 \text{ S/m}$; $\epsilon_r = 51.981$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-22-2015; Ambient Temp: 24.2°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3263; ConvF(4.98, 4.98, 4.98); Calibrated: 5/15/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/14/2014

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.58 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.820 W/kg

SAR(1 g) = 0.536 W/kg

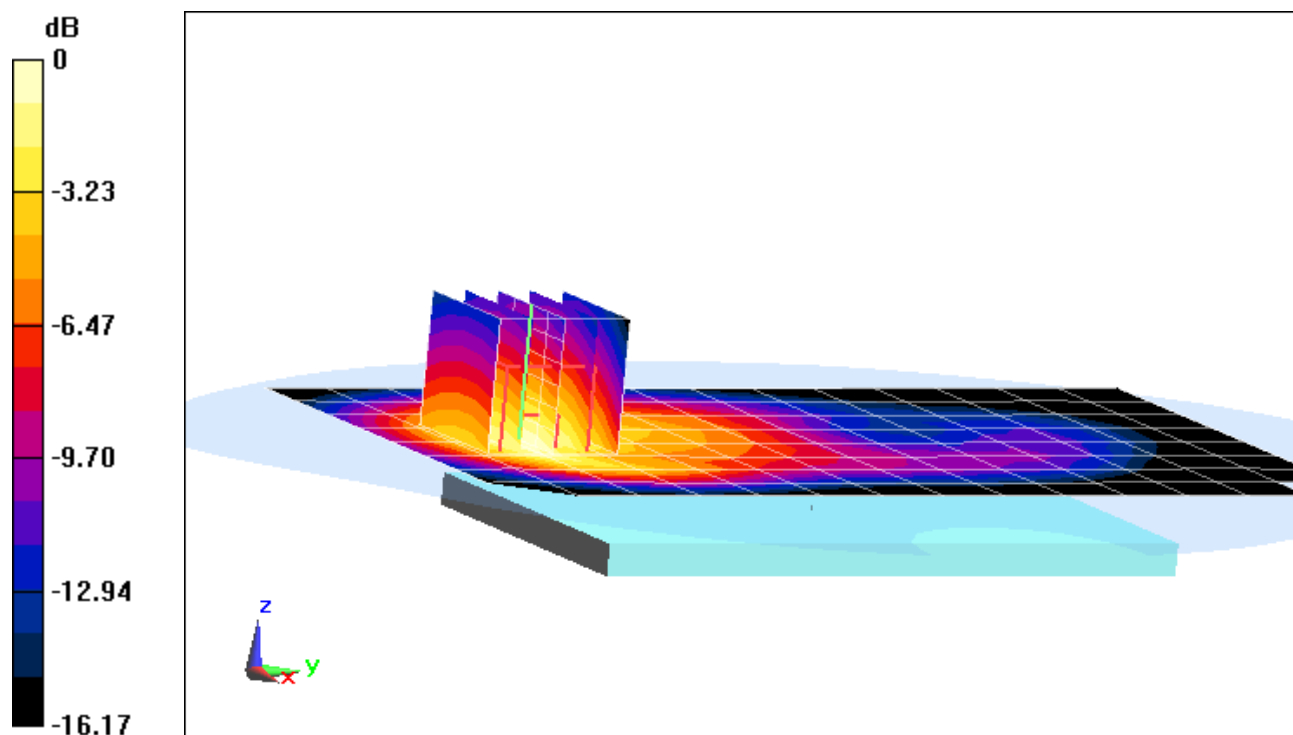

0 dB = 0.633 W/kg = -1.99 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C75

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body, Medium parameters used (interpolated):

$f = 1732.5$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 52.608$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-26-2015; Ambient Temp: 23.9°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3288; ConvF(5.03, 5.03, 5.03); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Body SAR, Bottom Edge, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (10x7x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.96 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.609 W/kg

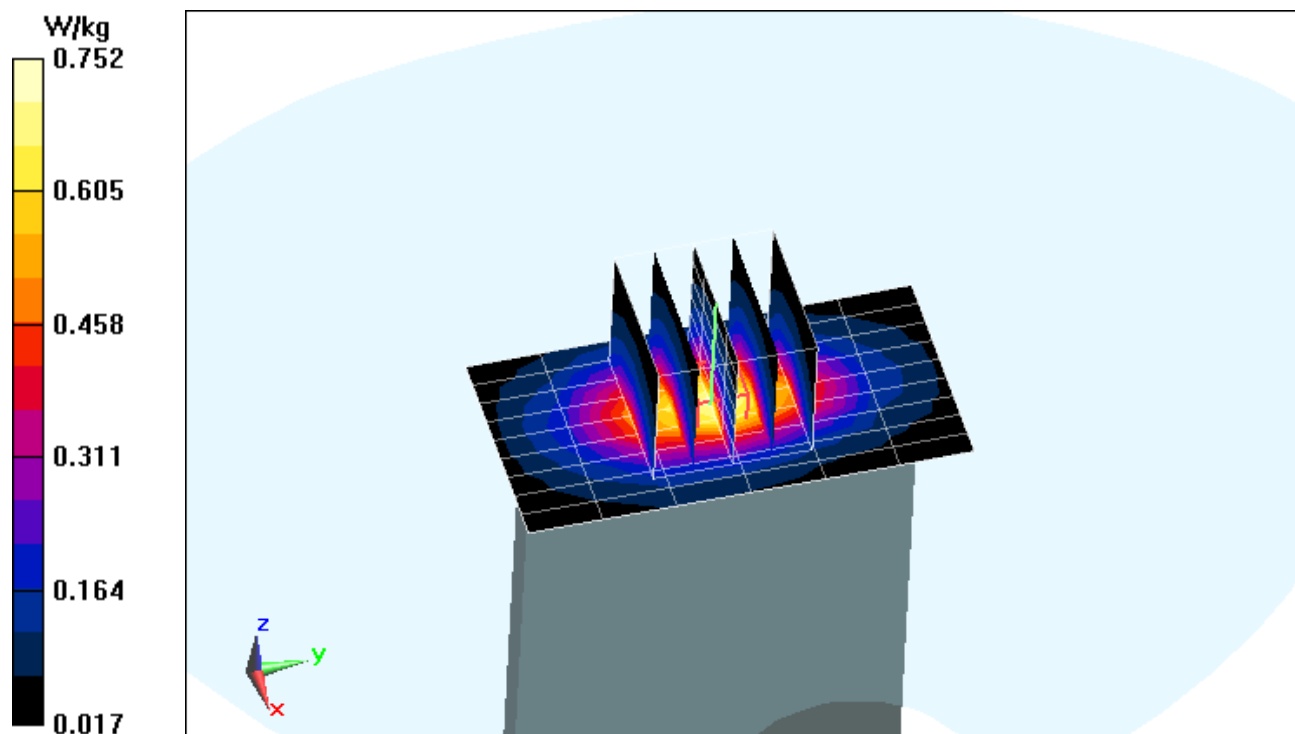

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C73

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body, Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.542 \text{ S/m}$; $\epsilon_r = 51.633$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-22-2015; Ambient Temp: 23.9°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3258; ConvF(4.61, 4.61, 4.61); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 2 (PCS), Body SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.26 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.495 W/kg

SAR(1 g) = 0.313 W/kg

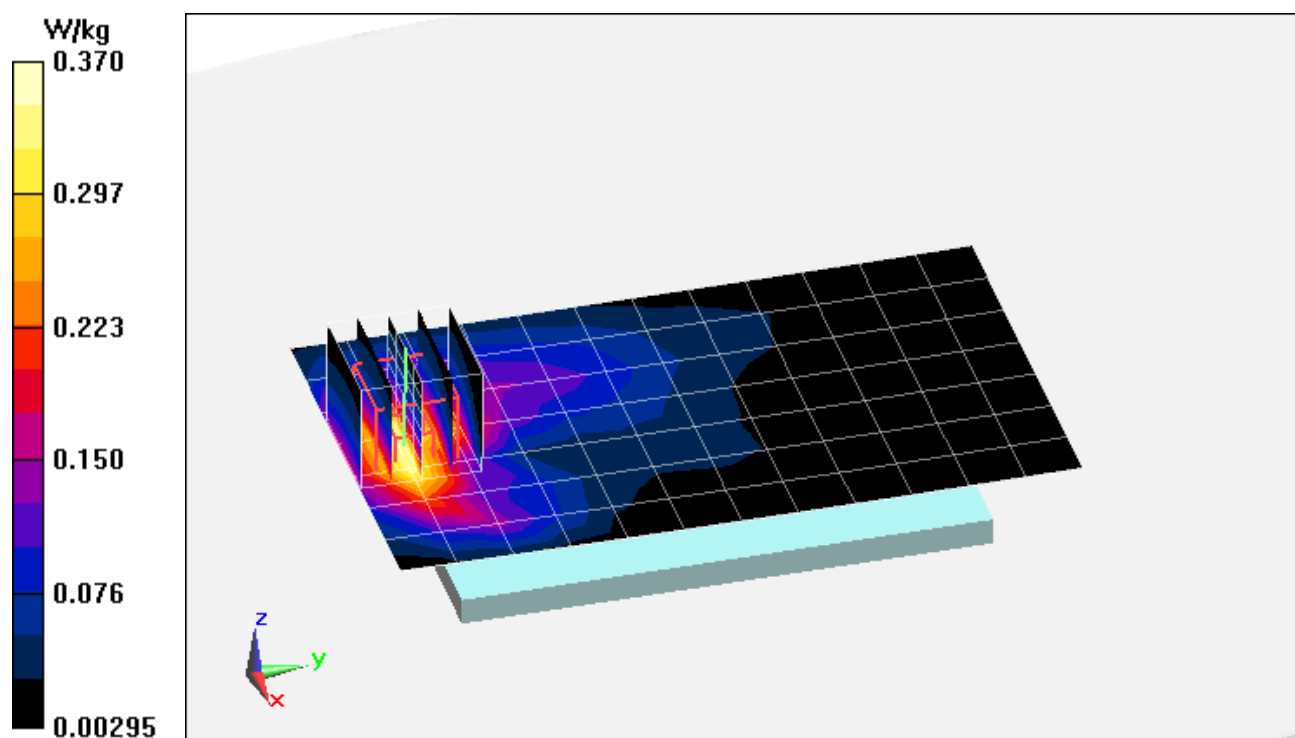

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15C75

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body, Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.542 \text{ S/m}$; $\epsilon_r = 51.633$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-22-2015; Ambient Temp: 23.9°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3258; ConvF(4.61, 4.61, 4.61); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 2 (PCS), Body SAR, Bottom Edge, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (10x9x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.73 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.700 W/kg

SAR(1 g) = 0.420 W/kg

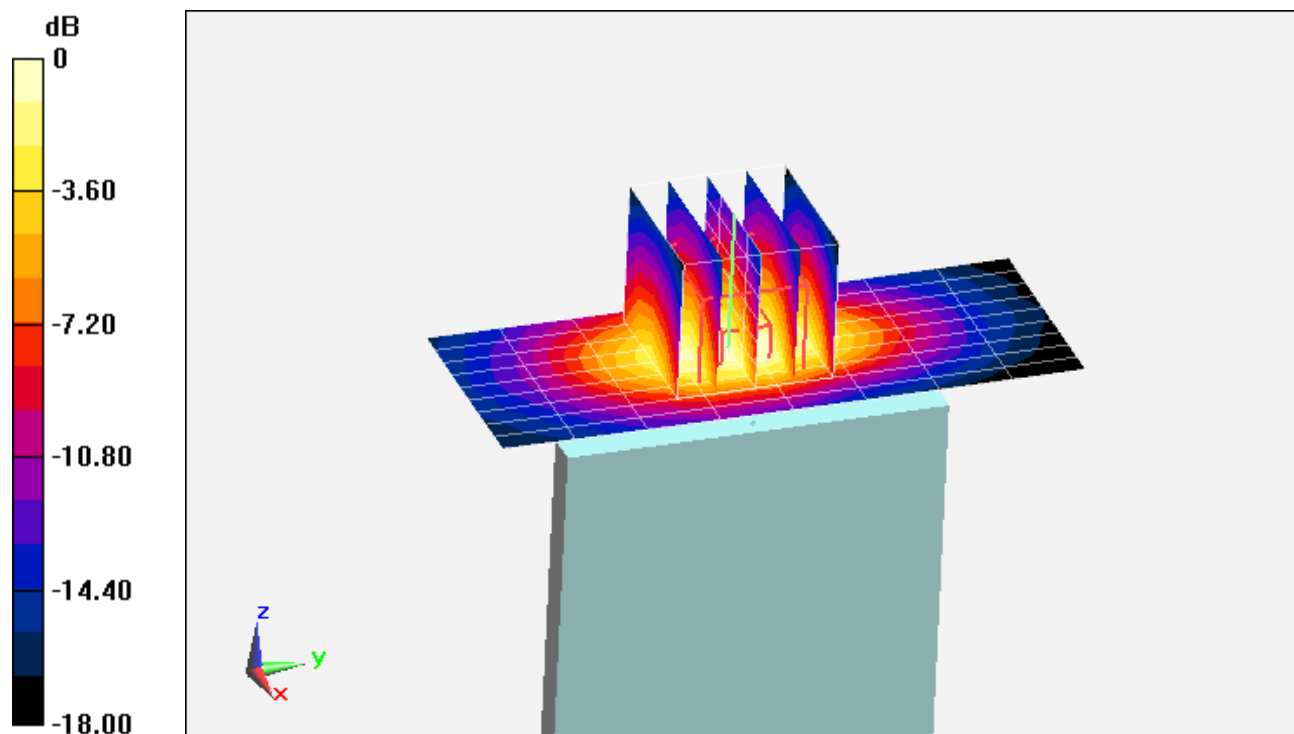

0 dB = 0.512 W/kg = -2.91 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15624

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 1.907 \text{ S/m}$; $\epsilon_r = 51.035$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-22-2015; Ambient Temp: 23.5°C; Tissue Temp: 23.8°C

Probe: ES3DV3 - SN3209; ConvF(4.2, 4.2, 4.2); Calibrated: 3/19/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/17/2014

Phantom: SAM left; Type: QD000P40CD; Serial: TP:1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, 22 MHz Bandwidth, Ant 1,
Body SAR, Ch 06, 1 Mbps, Back Side**


Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.8180 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.269 W/kg

SAR(1 g) = 0.128 W/kg

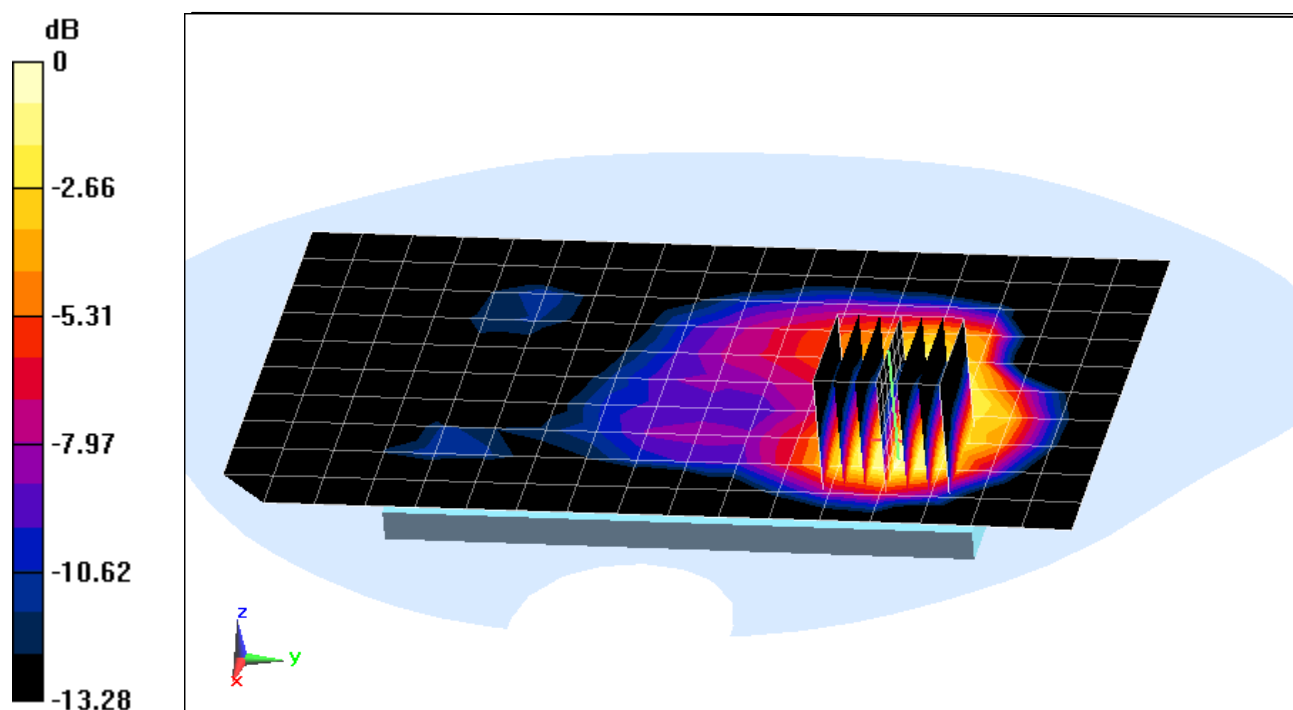

0 dB = 0.162 W/kg = -7.90 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15624

Communication System: UID 0, IEEE 802.11n; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5260 \text{ MHz}$; $\sigma = 5.485 \text{ S/m}$; $\epsilon_r = 48.257$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-19-2015; Ambient Temp: 24.7°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN3920; ConvF(4.16, 4.16, 4.16); Calibrated: 12/12/2014;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/11/2014

Phantom: SAM; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11n, U-NII-2A, 20 MHz Bandwidth, Ant 2,
Body SAR, Back Side, Ch 52, 6.5 Mbps**


Area Scan (13x20x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 6.059 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 0.181 W/kg

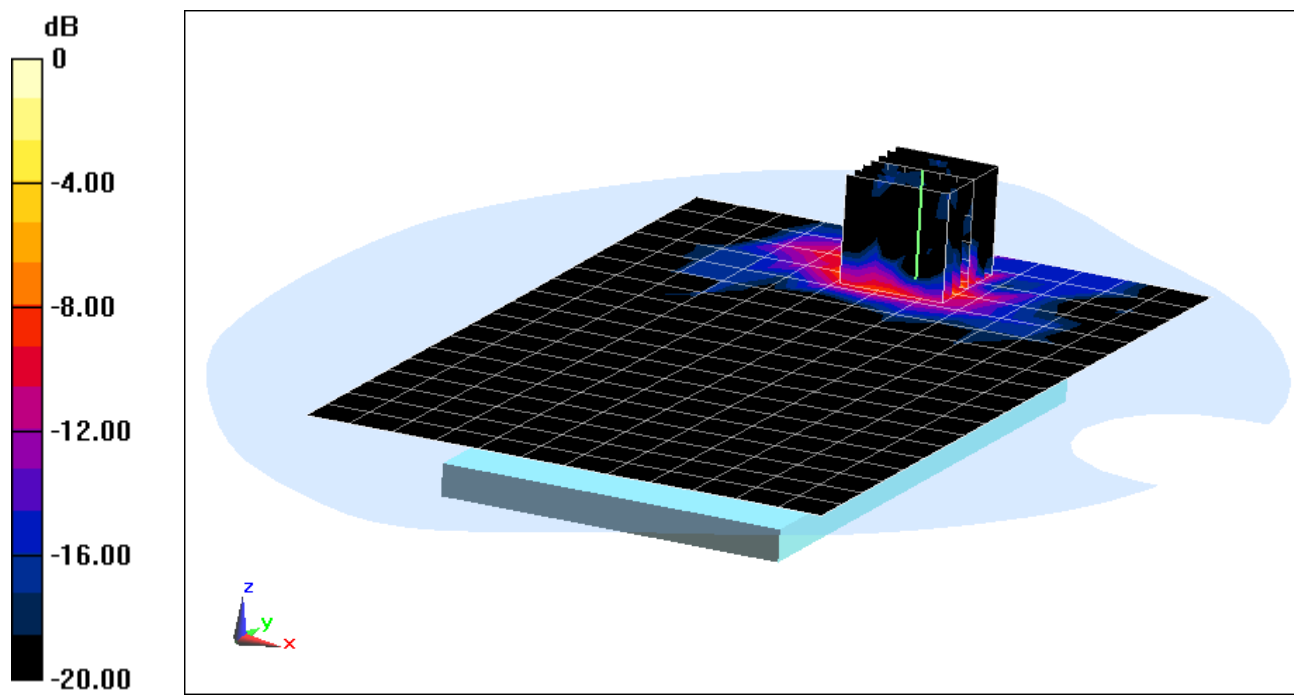

0 dB = 0.423 W/kg = -3.74 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMG925T; Type: Portable Handset; Serial: 15624

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5745 \text{ MHz}$; $\sigma = 6.176 \text{ S/m}$; $\epsilon_r = 47.389$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-19-2015; Ambient Temp: 23.9°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN3920; ConvF(3.93, 3.93, 3.93); Calibrated: 12/12/2014;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/11/2014

Phantom: SAM; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11a, U-NII-3, 20 MHz Bandwidth, Ant 1,
Body SAR, Front Side, Ch 149, 6 Mbps**


Area Scan (13x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 4.267 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.437 W/kg

SAR(1 g) = 0.109 W/kg

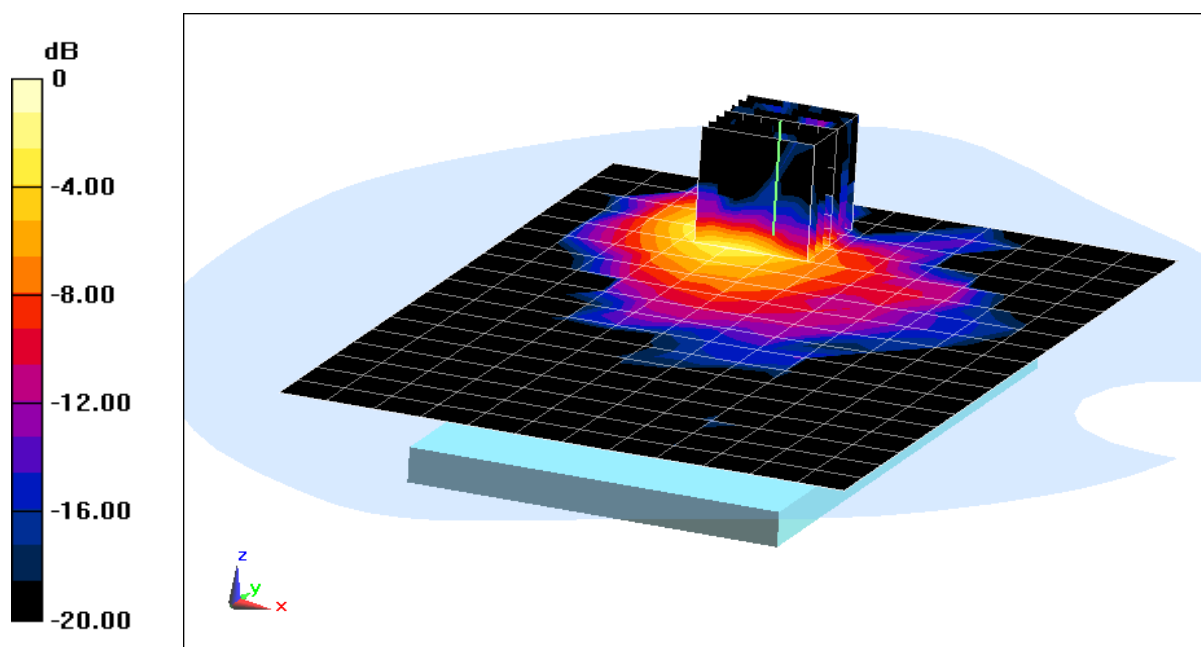

0 dB = 0.269 W/kg = -5.70 dBW/kg

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1054

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head, Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.898 \text{ S/m}$; $\epsilon_r = 40.834$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-19-2015; Ambient Temp: 24.2°C; Tissue Temp: 21.3°C

Probe: ES3DV3 - SN3288; ConvF(6.81, 6.81, 6.81); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

750 MHz System Verification

Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power= 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.784 W/kg

Deviation : -5.88%

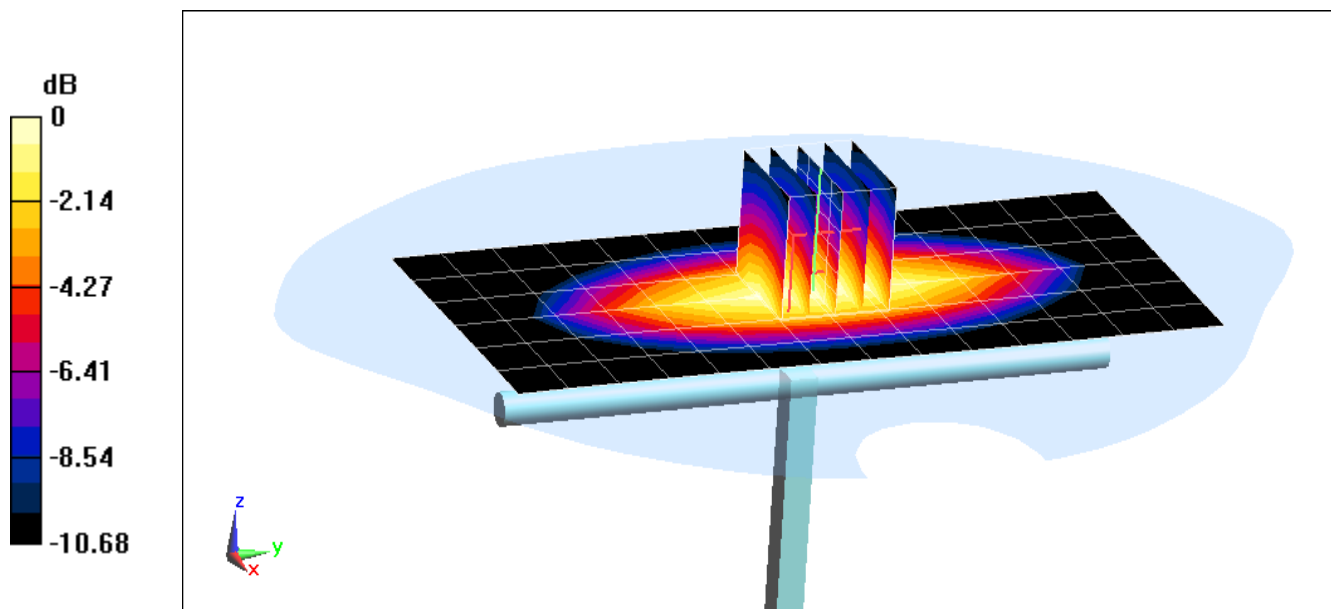

0 dB = 0.921 W/kg = -0.36 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head, Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.933 \text{ S/m}$; $\epsilon_r = 43.439$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-19-2015; Ambient Temp: 23.1°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3263; ConvF(6.23, 6.23, 6.23); Calibrated: 5/15/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/14/2014

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.971 W/kg

Deviation : 5.54%

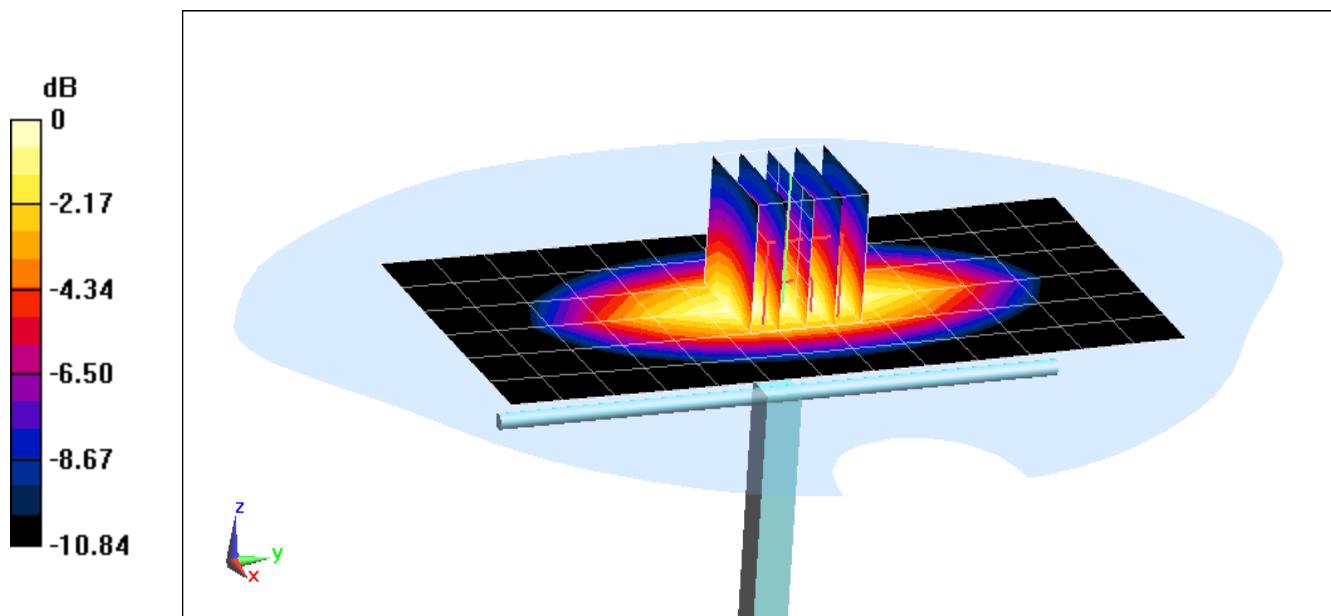

0 dB = 1.14 W/kg = 0.57 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1008

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head, Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.344 \text{ S/m}$; $\epsilon_r = 38.466$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-22-2015; Ambient Temp: 23.0°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3263; ConvF(5.41, 5.41, 5.41); Calibrated: 5/15/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/14/2014

Phantom: SAM v5.0 Left; Type: QD000P40CD; Serial: TP: 1687

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power= 20 dBm (100 mW)

Peak SAR (extrapolated) = 6.16 W/kg

SAR(1 g) = 3.45 W/kg

Deviation: -6.50%

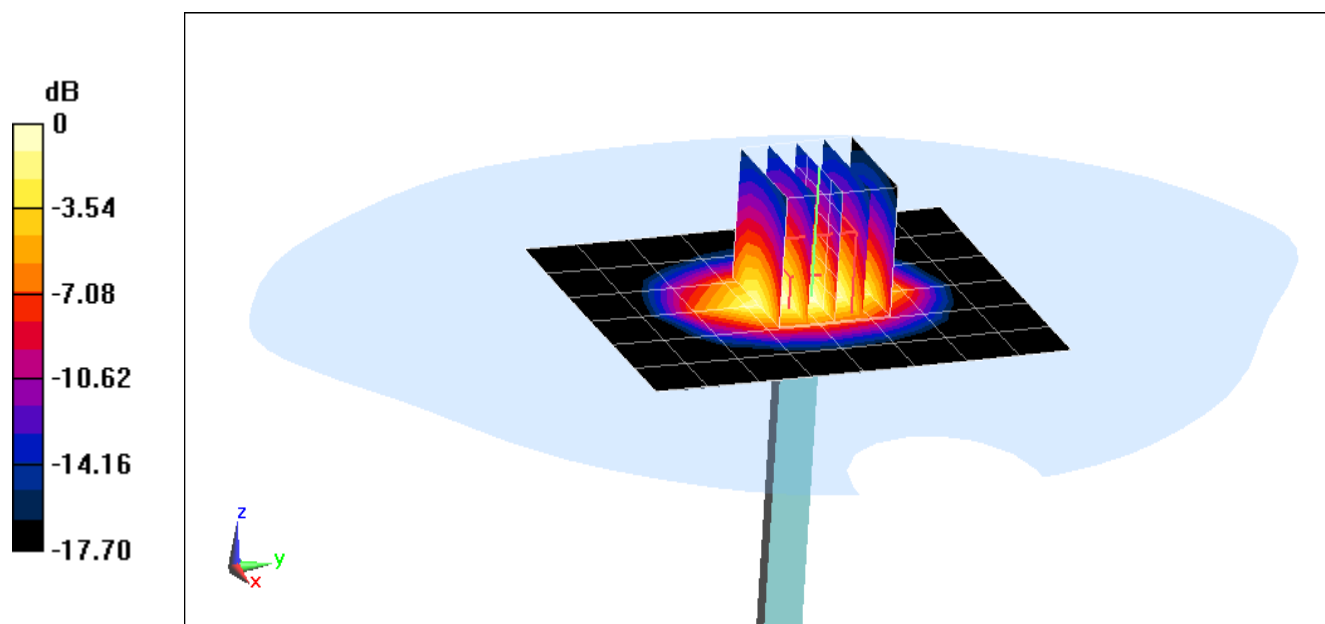

0 dB = 4.20 W/kg = 6.23 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head, Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.409 \text{ S/m}$; $\epsilon_r = 39.285$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-19-2015; Ambient Temp: 24.4°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3258; ConvF(5.04, 5.04, 5.04); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification

Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power= 20 dBm (100 mW)

Peak SAR (extrapolated) = 7.59 W/kg

SAR(1 g) = 4.15 W/kg

Deviation: 3.23%

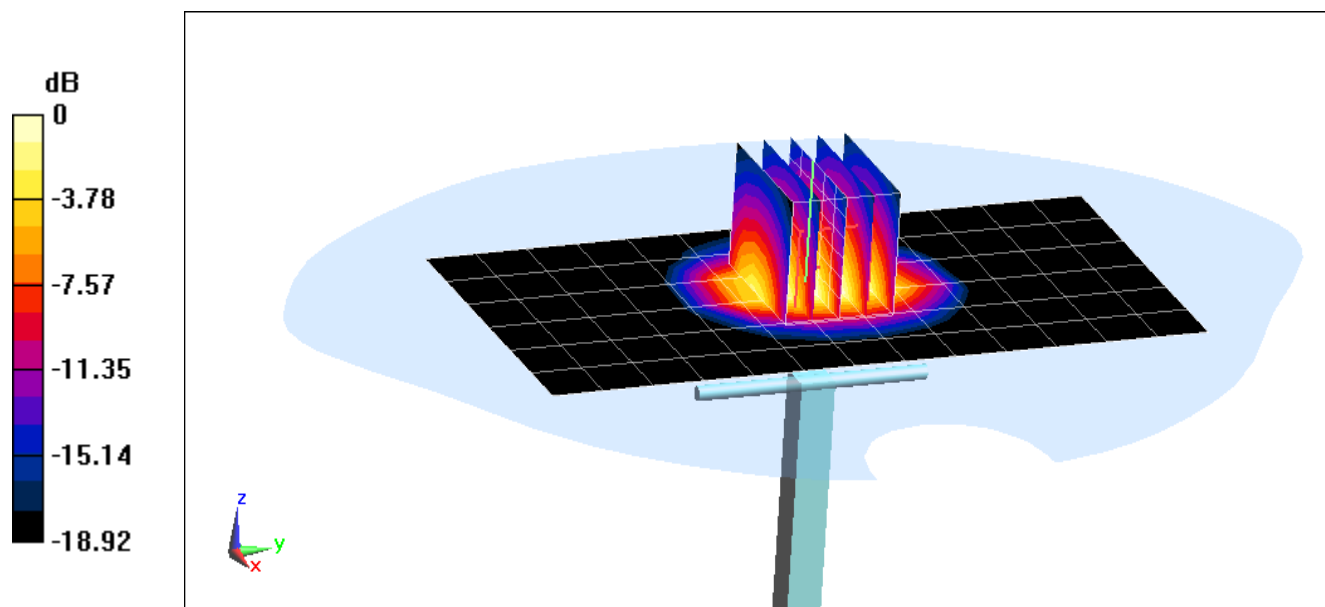

0 dB = 4.59 W/kg = 6.62 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head, Medium parameters used:

$f = 2450$ MHz; $\sigma = 1.797$ S/m; $\epsilon_r = 37.953$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-02-2015; Ambient Temp: 24.1°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3258; ConvF(4.52, 4.52, 4.52); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification

Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power= 20 dBm (100 mW)

Peak SAR (extrapolated) = 10.5 W/kg

SAR(1 g) = 5.07 W/kg

Deviation: -2.69%

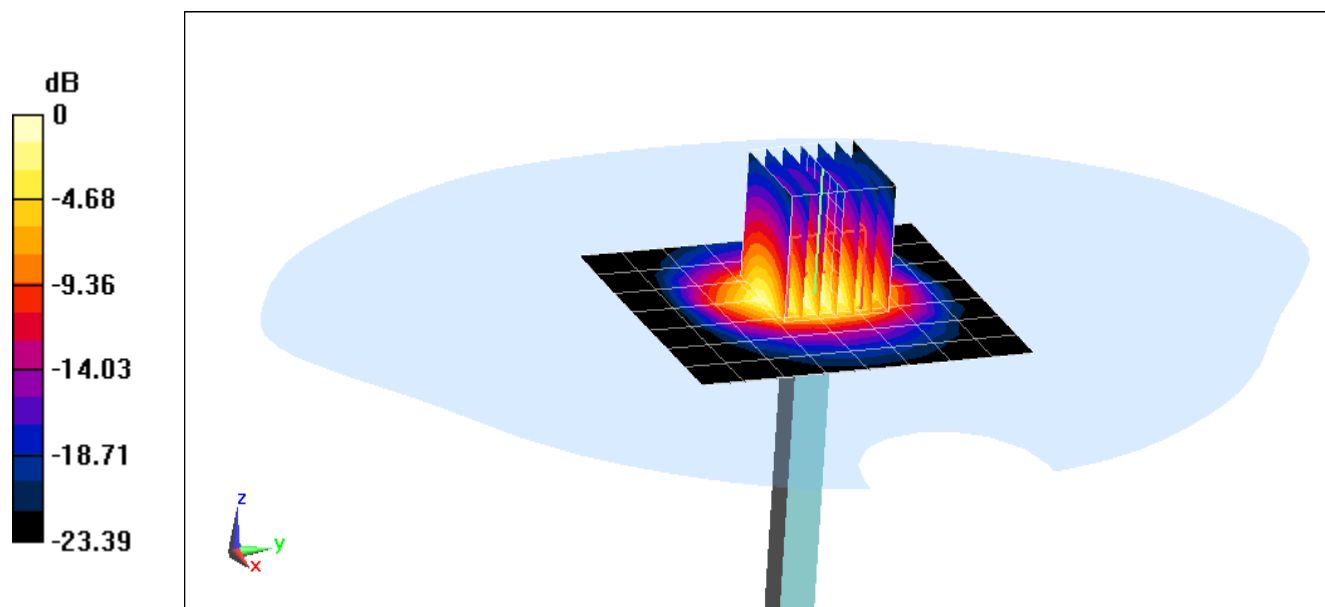

0 dB = 6.41 W/kg = 8.07 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5300 MHz; Type: D5GHzV2; Serial: 1120

Communication System: UID 0, CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head, Medium parameters used:

$f = 5300 \text{ MHz}$; $\sigma = 4.627 \text{ S/m}$; $\epsilon_r = 37.125$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-27-2015; Ambient Temp: 24.5°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3920; ConvF(4.69, 4.69, 4.69); Calibrated: 12/12/2014;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/11/2014

Phantom: SAM, Left; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5300 MHz System Verification

Area Scan (7x8x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power= 20 dBm (100 mW)

Peak SAR (extrapolated) = 33 W/kg

SAR(1 g) = 8.17 W/kg

Deviation: -2.04%

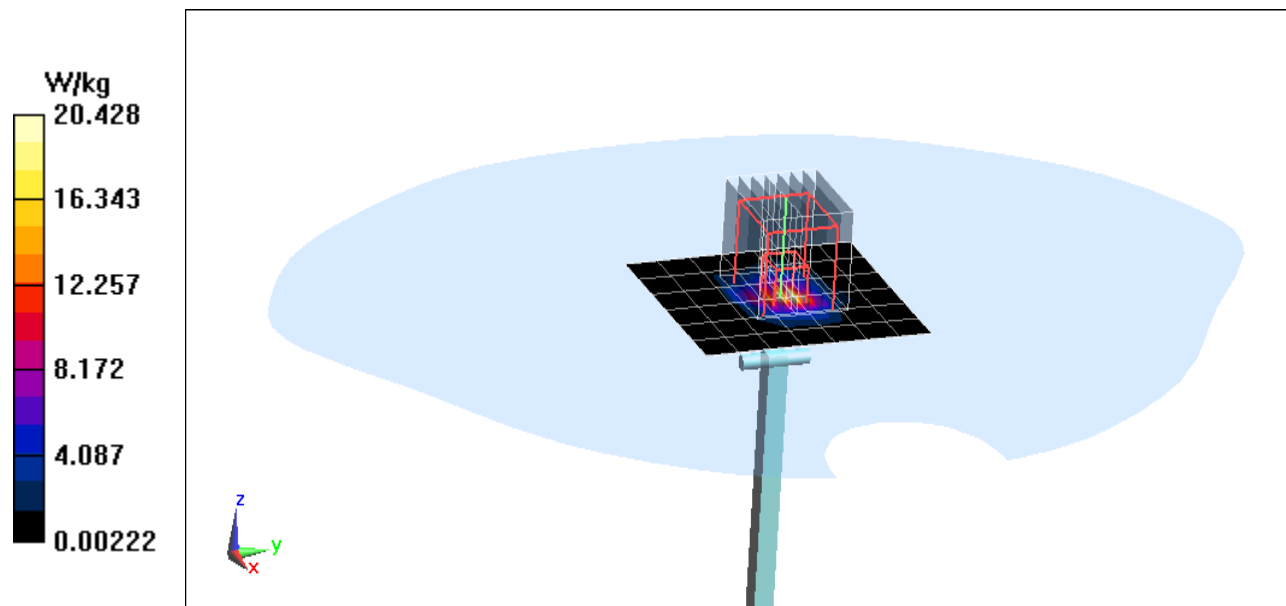

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1120

Communication System: UID 0, CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head, Medium parameters used:

$f = 5500 \text{ MHz}$; $\sigma = 4.847 \text{ S/m}$; $\epsilon_r = 36.818$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-27-2015; Ambient Temp: 24.0°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3920; ConvF(4.44, 4.44, 4.44); Calibrated: 12/12/2014;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/11/2014

Phantom: SAM, Left; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5500 MHz System Verification

Area Scan (7x8x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power= 20 dBm (100 mW)

Peak SAR (extrapolated) = 33.8 W/kg

SAR(1 g) = 8.36 W/kg

Deviation: -1.53%

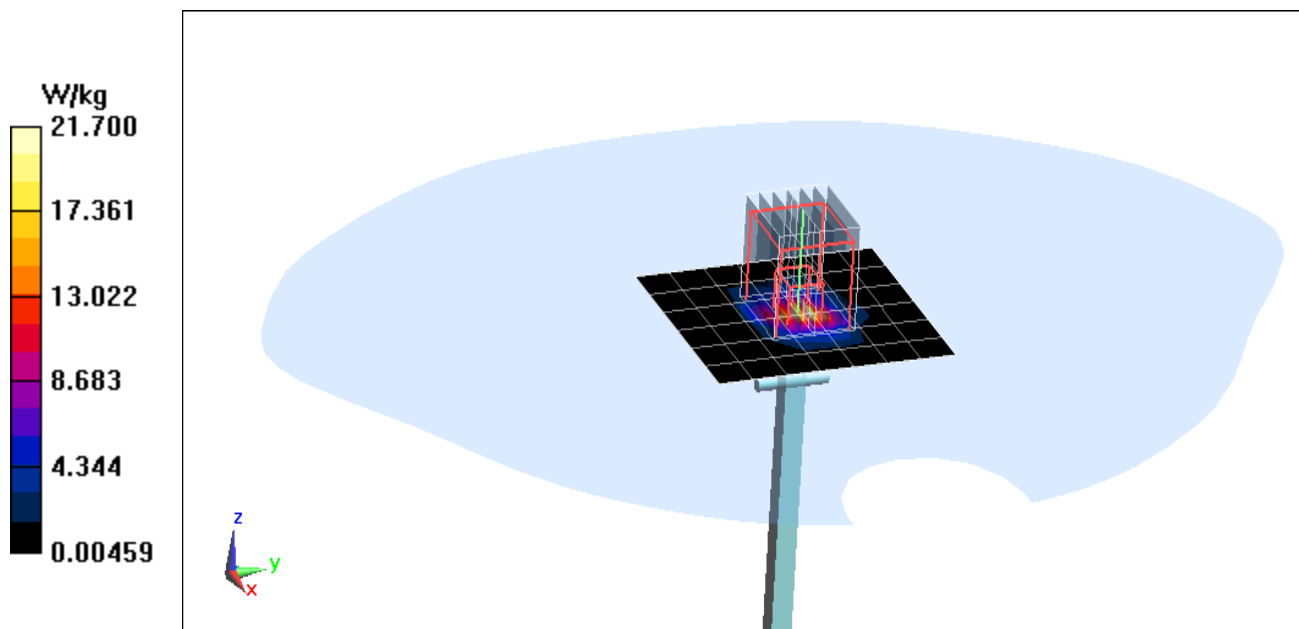

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5600 MHz; Type: D5GHzV2; Serial: 1120

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head, Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 4.951 \text{ S/m}$; $\epsilon_r = 36.628$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-27-2015; Ambient Temp: 23.3°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3920; ConvF(4.35, 4.35, 4.35); Calibrated: 12/12/2014;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/11/2014

Phantom: SAM, Left; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5600 MHz System Verification

Area Scan (7x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power= 20 dBm (100 mW)

Peak SAR (extrapolated) = 36.8 W/kg

SAR(1 g) = 8.43 W/kg

Deviation: 2.55 %

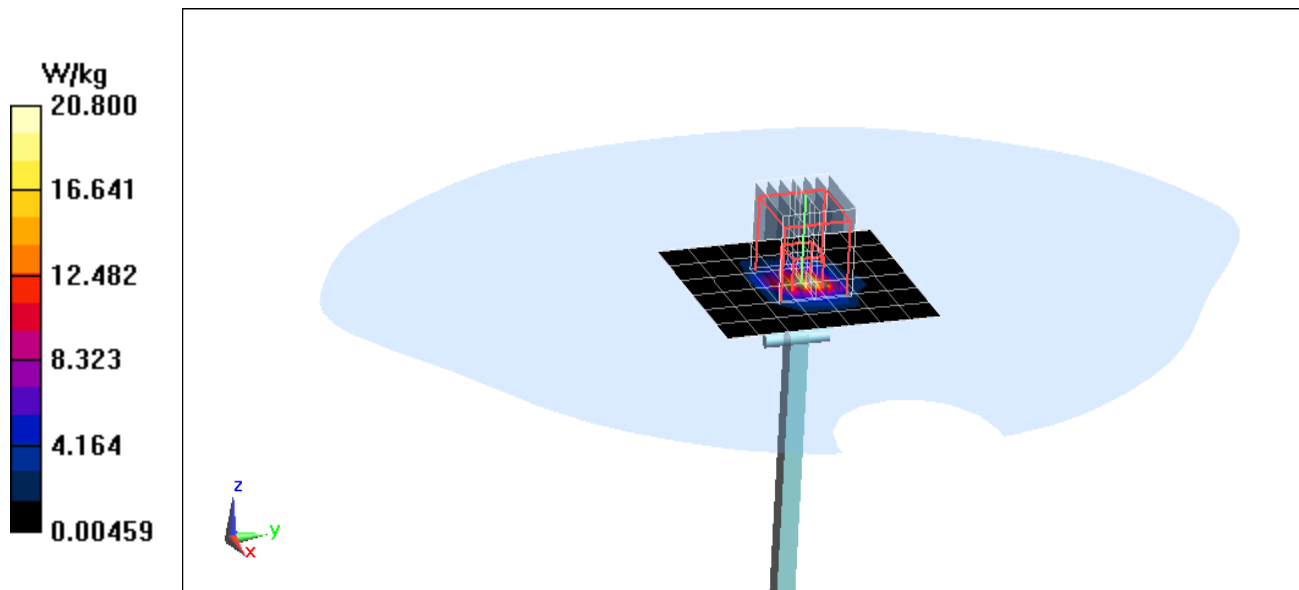

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1120

Communication System: UID 0, CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head, Medium parameters used:

$f = 5800 \text{ MHz}$; $\sigma = 5.169 \text{ S/m}$; $\epsilon_r = 36.411$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-27-2015; Ambient Temp: 23.3°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3920; ConvF(4.27, 4.27, 4.27); Calibrated: 12/12/2014;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/11/2014

Phantom: SAM, Left; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5800 MHz System Verification

Area Scan (7x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power= 20 dBm (100 mW)

Peak SAR (extrapolated) = 37.8 W/kg

SAR(1 g) = 8.1 W/kg

Deviation: 2.40%

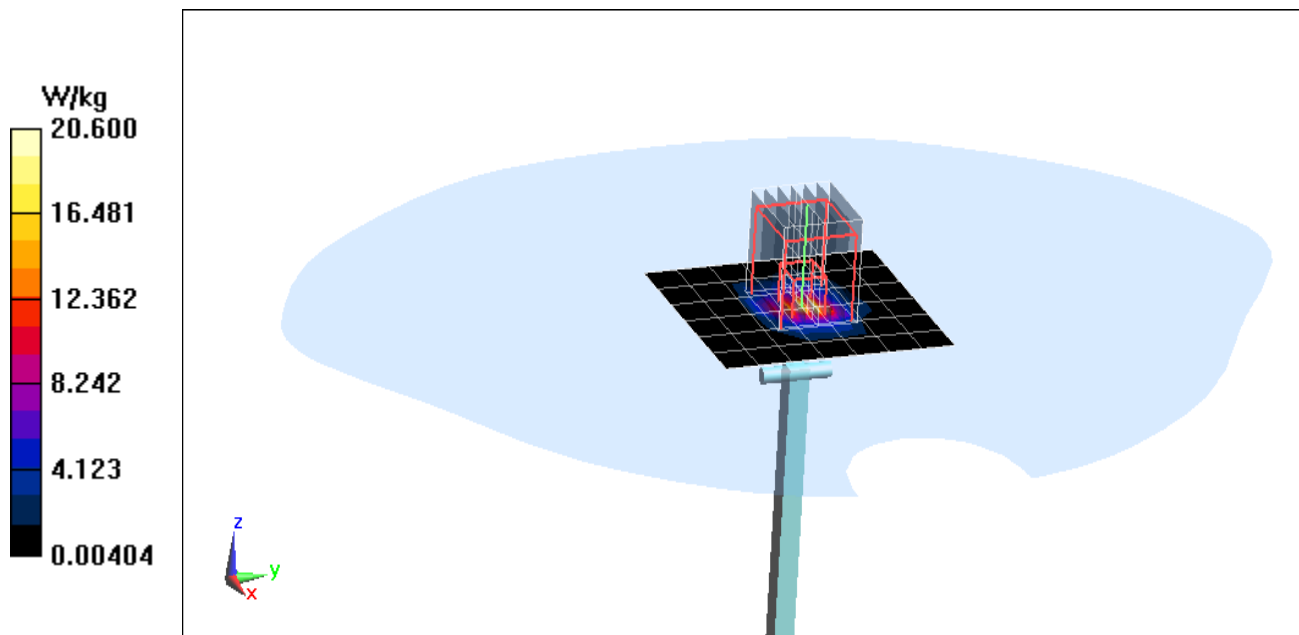

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1054

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body, Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.964 \text{ S/m}$; $\epsilon_r = 53.293$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-22-2015; Ambient Temp: 23.2°C; Tissue Temp: 23.4°C

Probe: ES3DV3 - SN3332; ConvF(6.24, 6.24, 6.24); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

750 MHz System Verification

Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power= 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.855 W/kg

Deviation: -1.04%

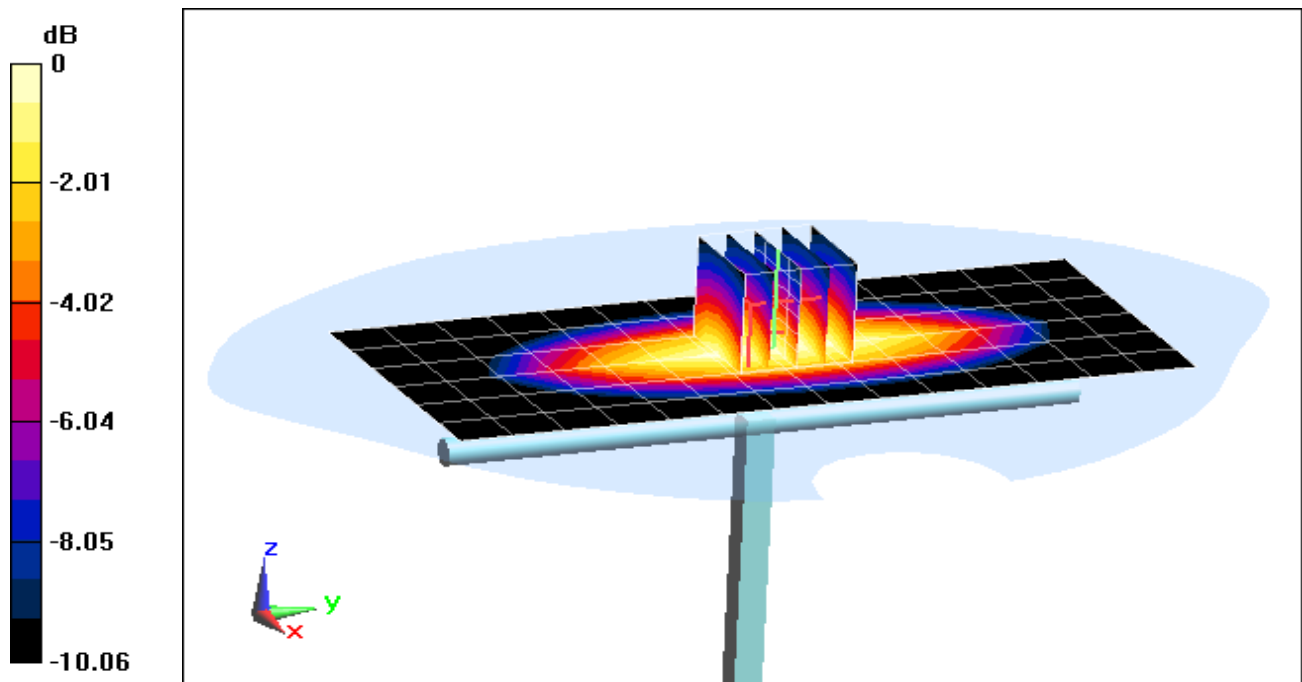

0 dB = 0.996 W/kg = -0.02 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body, Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 1.01 \text{ S/m}$; $\epsilon_r = 55.292$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-22-2015; Ambient Temp: 24.2°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3288; ConvF(6.32, 6.32, 6.32); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power= 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 1.02 W/kg

Deviation: 9.09%

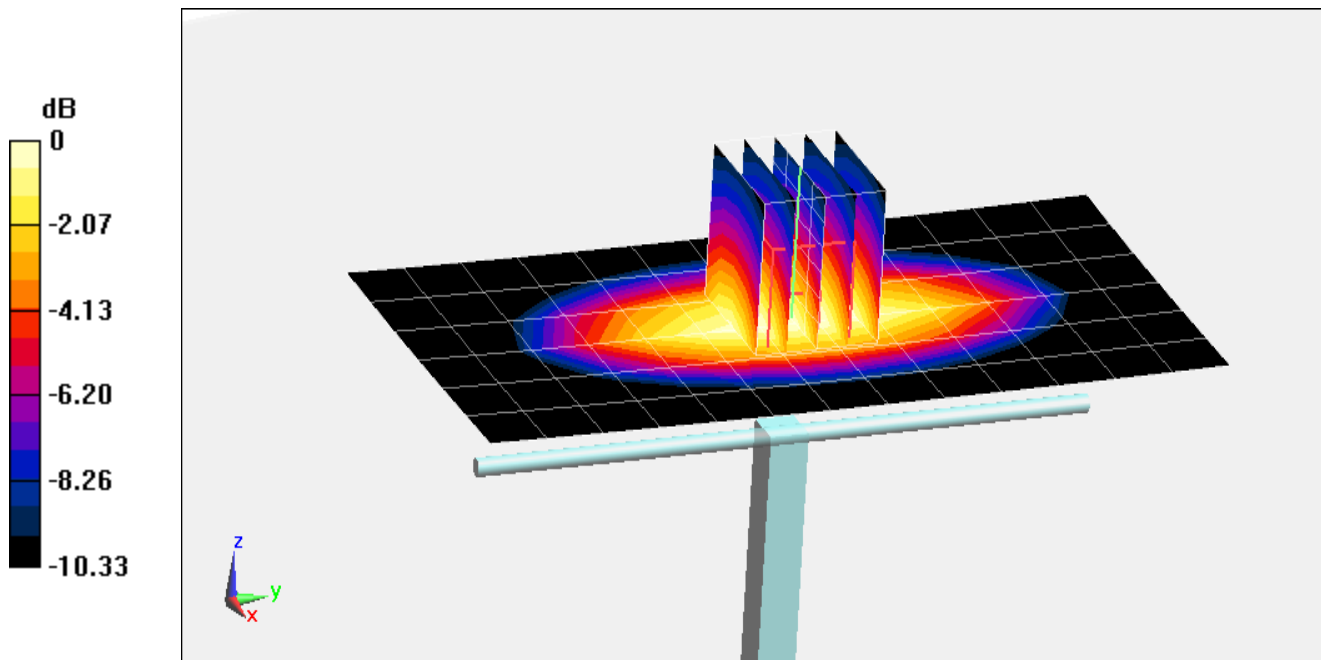

0 dB = 1.14 W/kg = 0.57 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body, Medium parameters used:

$f = 1750$ MHz; $\sigma = 1.461$ S/m; $\epsilon_r = 51.925$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-22-2015; Ambient Temp: 24.2°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3263; ConvF(4.98, 4.98, 4.98); Calibrated: 5/15/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/14/2014

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power= 20 dBm (100 mW)

Peak SAR (extrapolated) = 6.33 W/kg

SAR(1 g) = 3.65 W/kg

Deviation: -2.93%

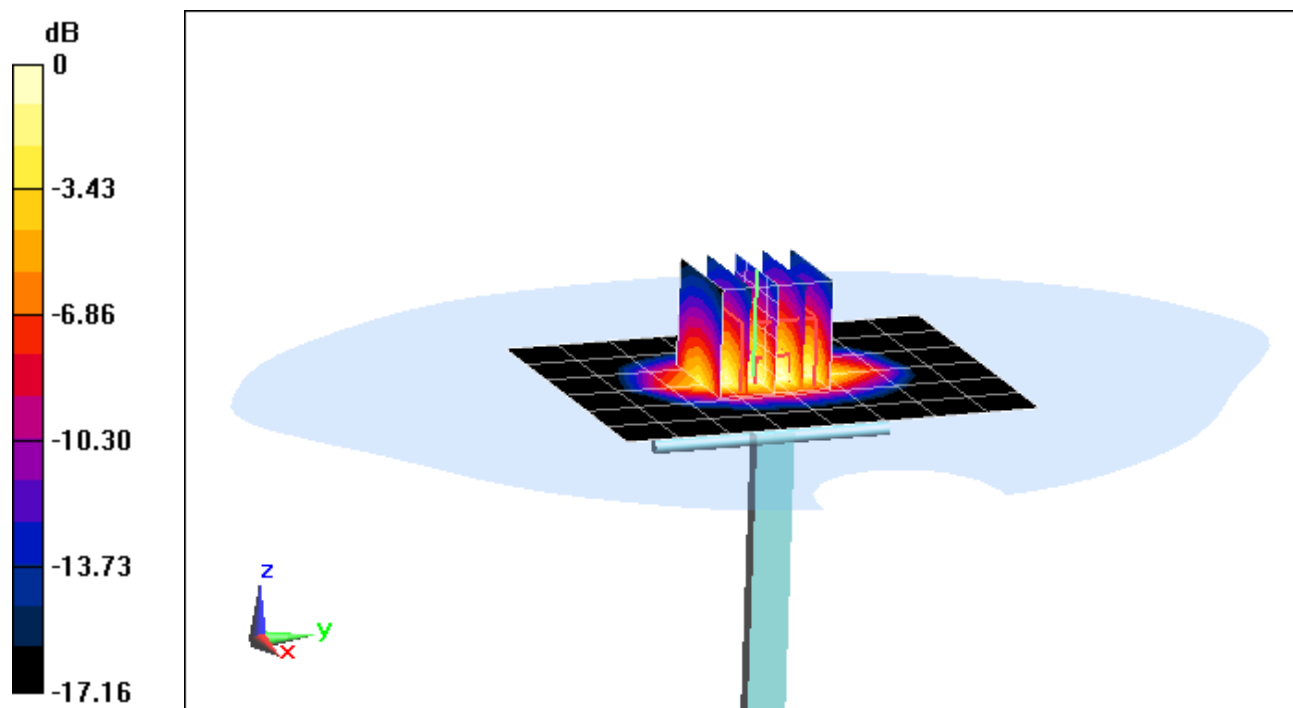

0 dB = 4.53 W/kg = 6.56 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1008

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body, Medium parameters used:

$f = 1750$ MHz; $\sigma = 1.479$ S/m; $\epsilon_r = 52.543$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-26-2015; Ambient Temp: 23.9°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3288; ConvF(5.03, 5.03, 5.03); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power= 20 dBm (100 mW)

Peak SAR (extrapolated) = 6.53 W/kg

SAR(1 g) = 3.72 W/kg

Deviation: -1.06%

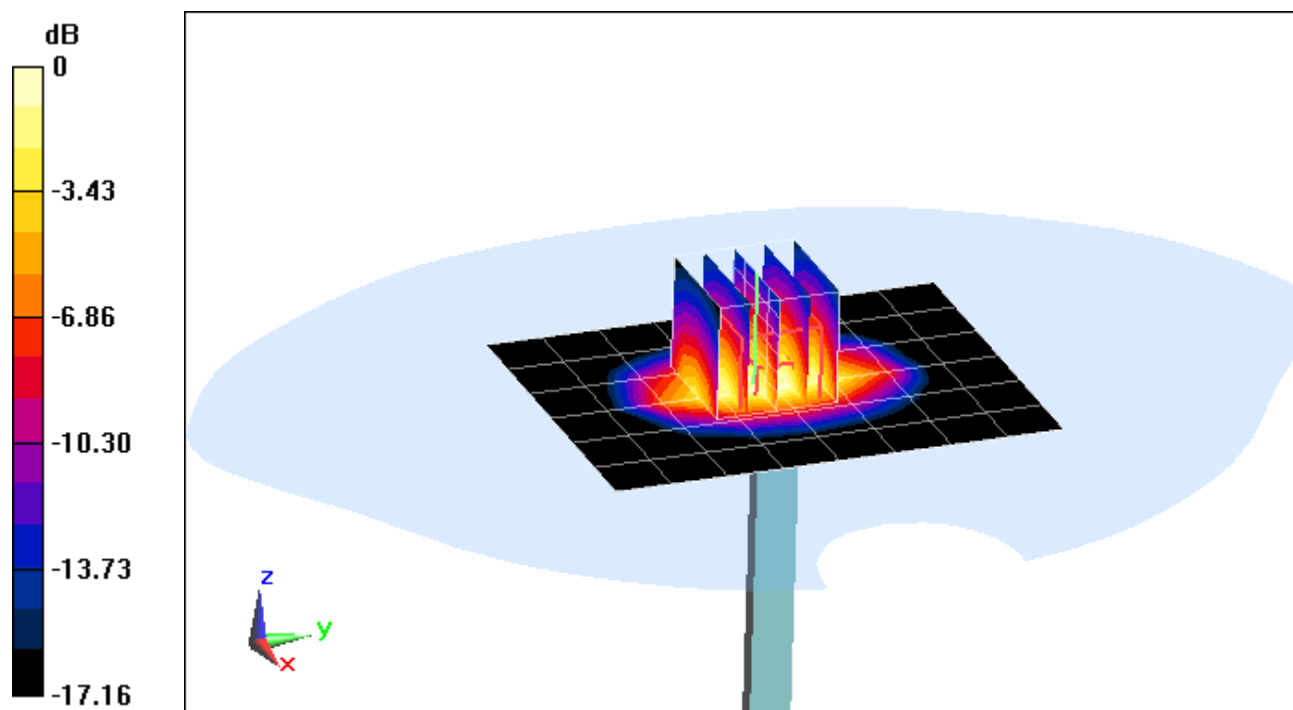

0 dB = 4.53 W/kg = 6.56 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body, Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.542 \text{ S/m}$; $\epsilon_r = 51.633$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Space: 1.0 cm

Test Date: 01-22-2015; Ambient Temp: 23.9°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3258; ConvF(4.61, 4.61, 4.61); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification

Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power= 20 dBm (100 mW)

Peak SAR (extrapolated) = 7.11 W/kg

SAR(1 g) = 4.12 W/kg

Deviation: 1.98%

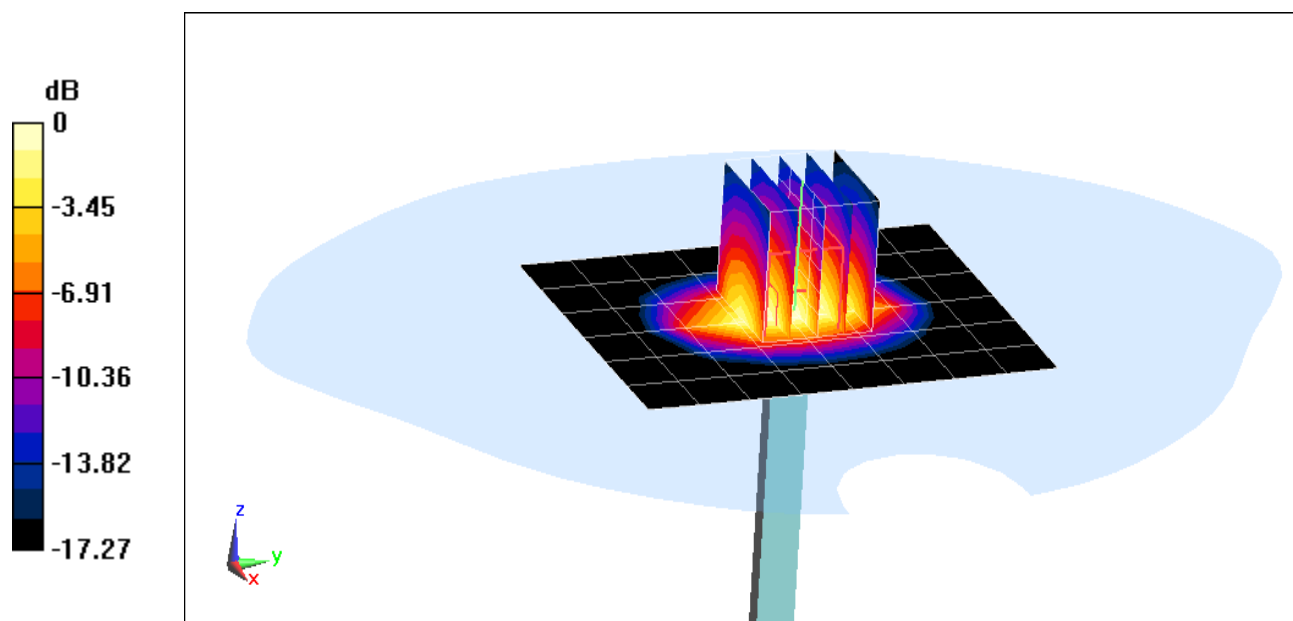

0 dB = 4.57 W/kg = 6.60 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body, Medium parameters used:

$f = 2450$ MHz; $\sigma = 1.925$ S/m; $\epsilon_r = 50.991$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-22-2015; Ambient Temp: 23.5°C; Tissue Temp: 23.8°C

Probe: ES3DV3 - SN3209; ConvF(4.2, 4.2, 4.2); Calibrated: 3/19/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/17/2014

Phantom: SAM left; Type: QD000P40CD; Serial: TP:1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification

Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power= 20 dBm (100 mW)

Peak SAR (extrapolated) = 11.2 W/kg

SAR(1 g) = 5.2 W/kg

Deviation: 0.39%

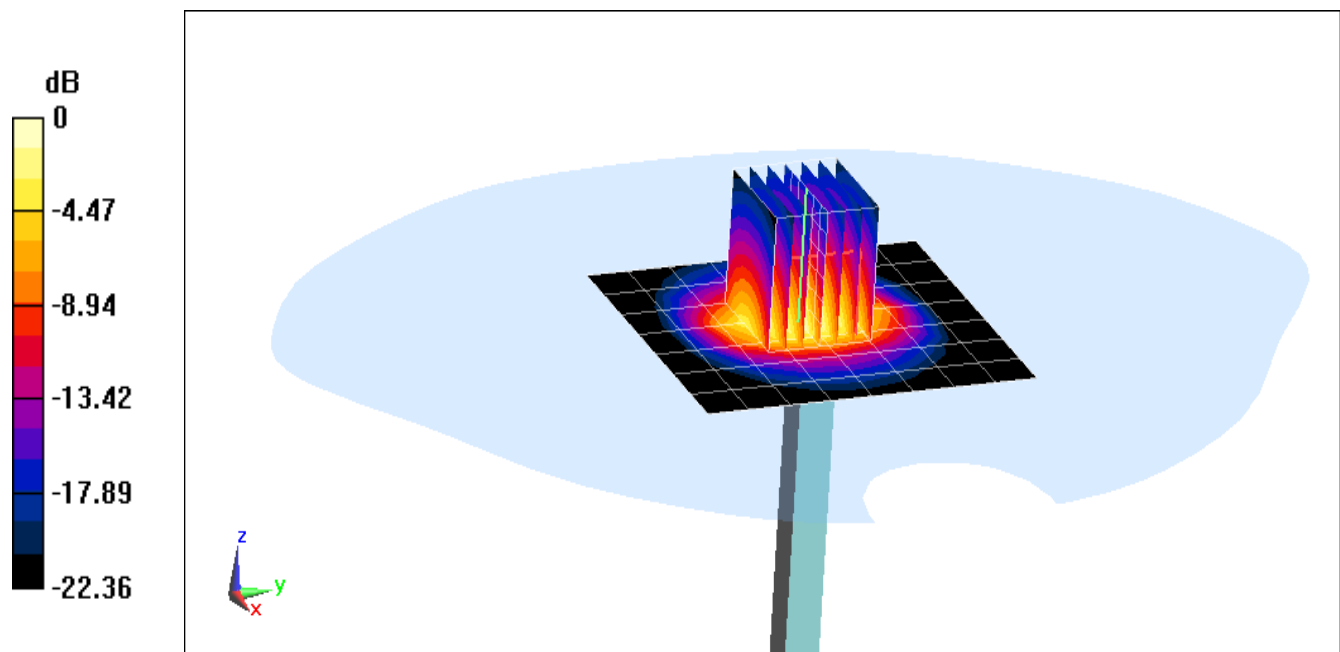

0 dB = 6.76 W/kg = 8.30 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5300 MHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body , Medium parameters used:

$f = 5300 \text{ MHz}$; $\sigma = 5.542 \text{ S/m}$; $\epsilon_r = 48.23$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-19-2015; Ambient Temp: 24.7°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN3920; ConvF(4.16, 4.16, 4.16); Calibrated: 12/12/2014;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/11/2014

Phantom: SAM; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5300 MHz System Verification

Area Scan (7x8x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 32.4 W/kg

SAR(1 g) = 7.95 W/kg

Deviation: -0.50%

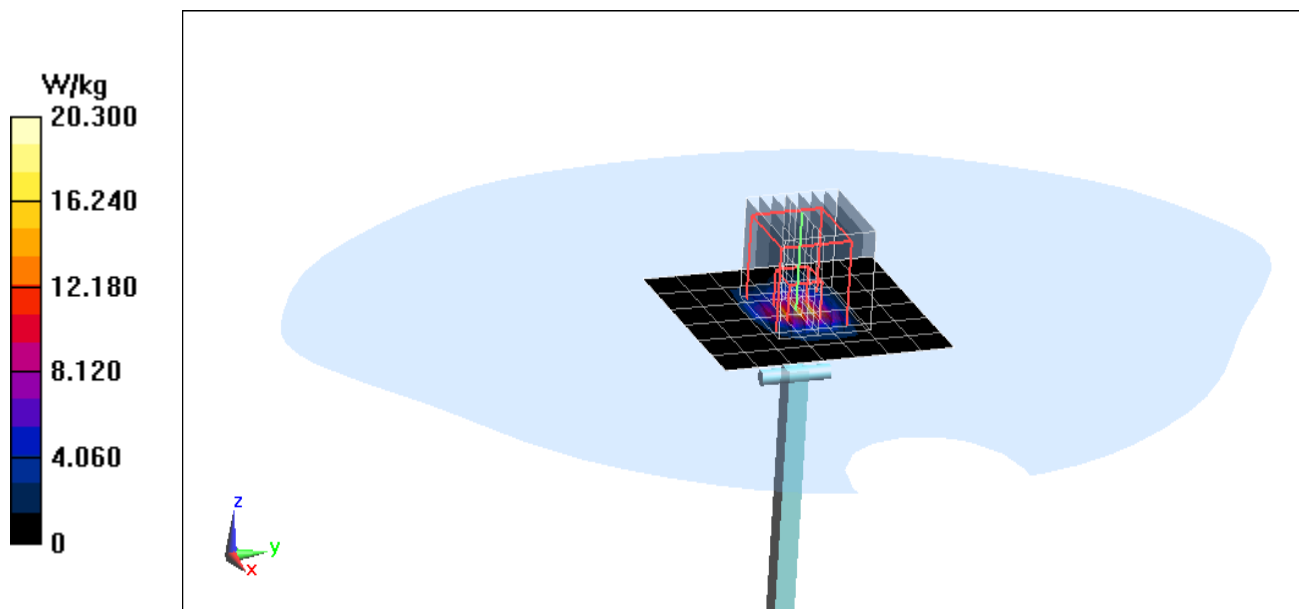

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body , Medium parameters used:

$f = 5500 \text{ MHz}$; $\sigma = 5.845 \text{ S/m}$; $\epsilon_r = 47.908$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-19-2015; Ambient Temp: 24.1°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN3920; ConvF(3.79, 3.79, 3.79); Calibrated: 12/12/2014;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/11/2014

Phantom: SAM; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5500 MHz System Verification

Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 32.3 W/kg

SAR(1 g) = 7.6 W/kg

Deviation: -8.54%

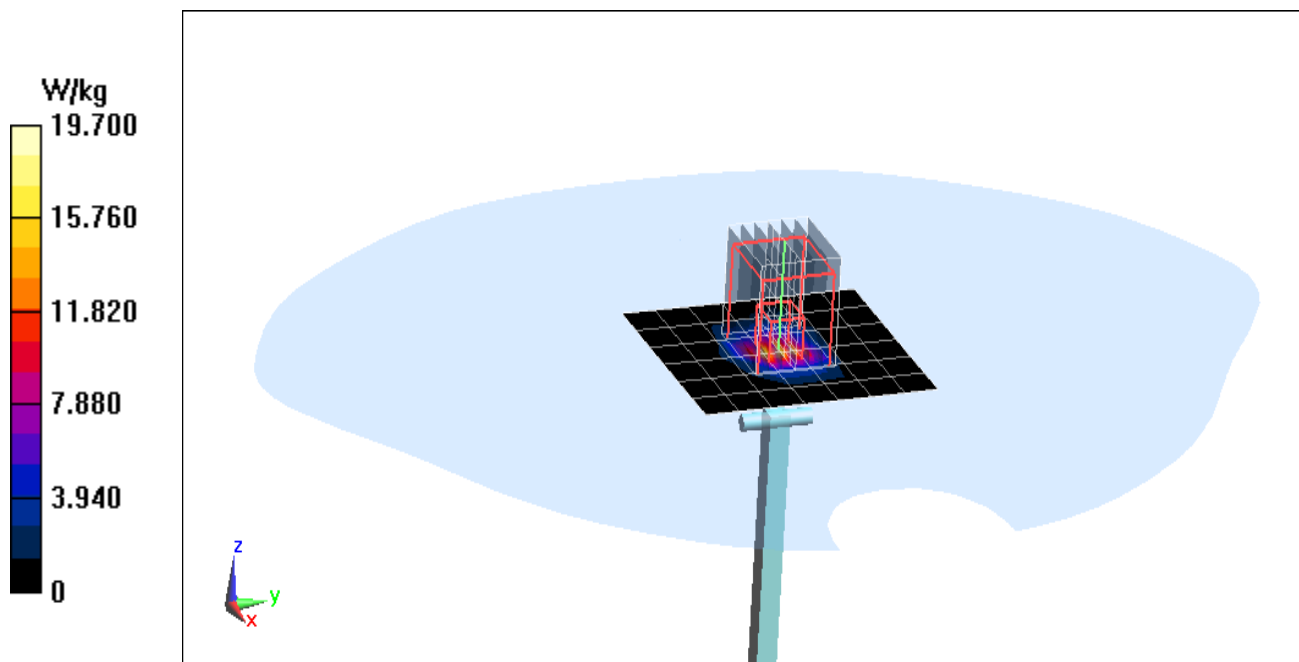

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5600 MHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body , Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 5.977 \text{ S/m}$; $\epsilon_r = 47.642$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-19-2015; Ambient Temp: 24.1°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN3920; ConvF(3.66, 3.66, 3.66); Calibrated: 12/12/2014;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/11/2014

Phantom: SAM; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5600 MHz System Verification

Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 32.4 W/kg

SAR(1 g) = 7.63 W/kg

Deviation: -9.27%

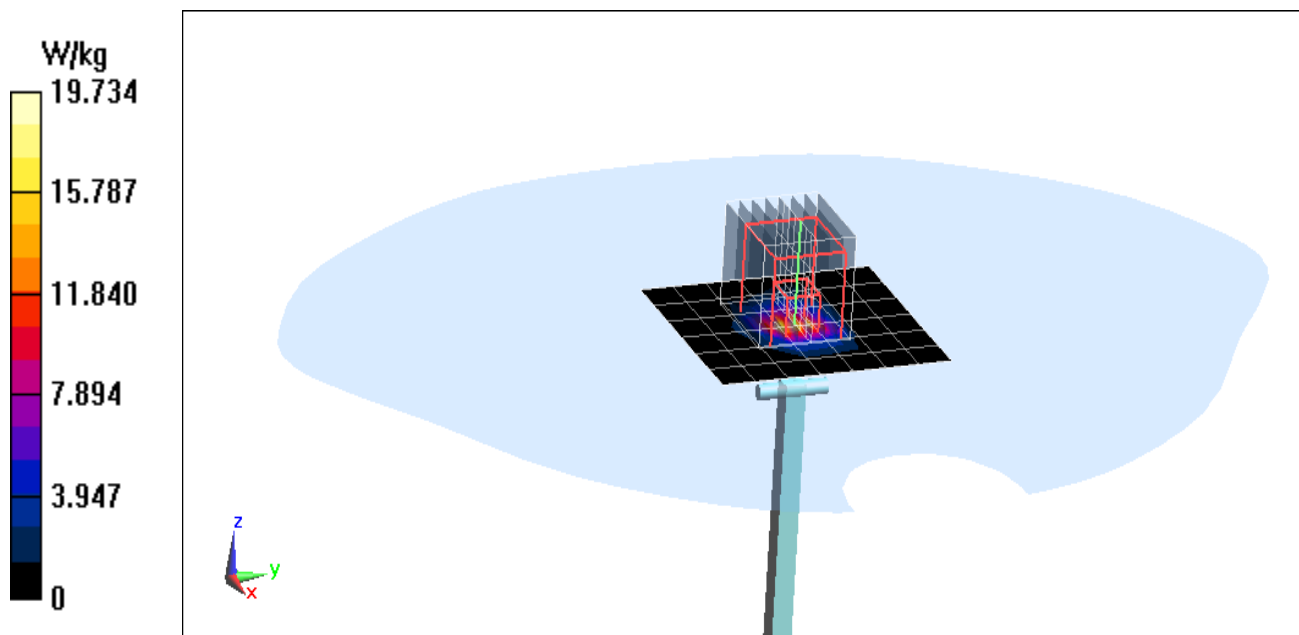

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body , Medium parameters used:

$f = 5800 \text{ MHz}$; $\sigma = 6.183 \text{ S/m}$; $\epsilon_r = 47.296$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-19-2015; Ambient Temp: 23.9°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN3920; ConvF(3.93, 3.93, 3.93); Calibrated: 12/12/2014;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 4/11/2014

Phantom: SAM; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5800 MHz System Verification

Area Scan (7x8x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 32.9 W/kg

SAR(1 g) = 7.09 W/kg

Deviation: -9.10%

