



SAR EVALUATION REPORT

Applicant Name:

Samsung Electronics, Co. Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do 443-742, Korea

Date of Testing:

04/15/13 - 06/03/13

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Document Serial No.:

0Y1304050595-R1.A3L

FCC ID:

A3LSMT311

APPLICANT:

SAMSUNG ELECTRONICS, CO. LTD.

DUT Type:

Portable Tablet

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model(s):

SM-T311

Equipment Class	Band & Mode	Tx Frequency	Measured Conducted Power [dBm]	SAR	
				1 gm Head (W/kg)	1 gm Body (W/kg)
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	30.82	0.33	0.99
PCE	UMTS 850	826.40 - 846.60 MHz	22.44	0.33	0.46
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	27.54	0.34	0.72
PCE	UMTS 1900	1852.4 - 1907.6 MHz	22.72	0.41	1.02
DTS	2.4 GHz WLAN	2412 - 2462 MHz	15.28	< 0.1	1.09
DTS	Bluetooth LE	2402 - 2480 MHz	6.21	N/A	
DTS	5.8 GHz WLAN	5745 - 5825 MHz	6.96	< 0.1	0.27
NII	5.2 GHz WLAN	5180 - 5240 MHz	7.01	< 0.1	1.02
NII	5.3 GHz WLAN	5260 - 5320 MHz	6.54	< 0.1	1.00
NII	5.5 GHz WLAN	5500 - 5700 MHz	6.78	< 0.1	0.49
DSS	Bluetooth	2402 - 2480 MHz	9.53	N/A	0.35
Simultaneous SAR per KDB 690783 D01v01r02:				0.42	1.55

Note: Powers in the above table represent output powers for the SAR test configurations and may not represent the highest output powers for all configurations for each mode.

Note: This revised test report (S/N: 0Y1304050595-R1.A3L) supersedes and replaces the previously issued test report on the same subject DUT for the same type of testing indicated. Please discard or destroy the previously issued tests report(s) and dispose of accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President



FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 1 of 53

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	INTRODUCTION	8
3	DOSIMETRIC ASSESSMENT	9
4	DEFINITION OF REFERENCE POINTS	10
5	TEST CONFIGURATION POSITIONS FOR HANDSETS	11
6	RF EXPOSURE LIMITS	13
7	FCC MEASUREMENT PROCEDURES.....	14
8	RF CONDUCTED POWERS.....	17
9	SYSTEM VERIFICATION.....	24
10	SAR DATA SUMMARY	26
11	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	32
12	SAR MEASUREMENT VARIABILITY	47
13	EQUIPMENT LIST	48
14	MEASUREMENT UNCERTAINTIES	49
15	CONCLUSION.....	51
16	REFERENCES	52
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: SAR TEST SETUP PHOTOGRAPHS		

FCC ID: A3LSMT311	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: 0Y1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet
		Page 2 of 53

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
2.4 GHz WLAN	Data	2412 - 2462 MHz
Bluetooth LE	Data	2402 - 2480 MHz
5.8 GHz WLAN	Data	5745 - 5825 MHz
5.2 GHz WLAN	Data	5180 - 5240 MHz
5.3 GHz WLAN	Data	5260 - 5320 MHz
5.5 GHz WLAN	Data	5500 - 5700 MHz
Bluetooth	Data	2402 - 2480 MHz

1.2 Power Reduction for SAR

This device uses two proximity sensors for SAR compliance. One IR sensor is activated when the device is held to the ear in voice and data operations, while the capacitive grip sensor is activated when used in close proximity to the user's body. Both the proximity sensors trigger power reduction for all voice and data modes. There are no operating conditions or exposure conditions that require the power reduction triggering of both the IR and capacitive sensors. The IR sensor is only applicable for held to ear operations and exposure conditions. The capacitive sensor is only applicable for tablet operations. There are no body worn accessories for this device.

The held-to-ear RF exposure conditions were evaluated at reduced power according to the Head SAR test positions described in IEEE 1528 and Supplement C. Since the device is a full tablet size, the Body SAR was evaluated per FCC KDB Publication 616217 D04v01 for full sized tablets.

FCC ID: A3LSMT311	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: 0Y1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet
		Page 3 of 53

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v05.

With power backoff: either capacitive sensor or IR sensor activated:

Mode / Band	Sensor State		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
			1 TX Slot	1 TX	2 TX	3 TX	4 TX	1 TX	2 TX	3 TX	4 TX
GSM/GPRS/EDGE 850	Active	Maximum	31.0	31.0	29.5	28.0	26.5	21.5	20.5	18.5	17.0
		Nominal	30.5	30.5	29.0	27.5	26.0	21.0	20.0	18.0	16.5
GSM/GPRS/EDGE 1900	Active	Maximum	23.5	23.5	21.0	19.5	18.5	19.5	17.0	15.5	14.5
		Nominal	23.0	23.0	20.5	19.0	18.0	19.0	16.5	15.0	14.0

Mode / Band	Sensor State		Modulated Average (dBm)		
			3GPP RMC	3GPP HSDPA	3GPP HSUPA
UMTS Band 5 (850 MHz)	Active	Maximum	20.0	20.0	20.0
		Nominal	19.5	19.5	19.5
UMTS Band 2 (1900 MHz)	Active	Maximum	16.0	16.0	16.0
		Nominal	15.5	15.5	15.5

Maximum power with capacitive sensor and IR sensor inactive for body SAR testing configurations:


Mode / Band	Sensor State		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
			1 TX Slot	1 TX	2 TX	3 TX	4 TX	1 TX	2 TX	3 TX	4 TX
GSM/GPRS/EDGE 850	Inactive	Maximum	33.0	33.0	31.0	29.5	28.0	26.5	26.5	26.5	23.5
		Nominal	32.5	32.5	30.5	29.0	27.5	26.0	26.0	26.0	23.0
GSM/GPRS/EDGE 1900	Inactive	Maximum	30.0	30.0	28.0	26.0	25.0	25.5	25.5	25.5	22.5
		Nominal	29.5	29.5	27.5	25.5	24.5	25.0	25.0	25.0	22.0

Mode / Band	Sensor State		Modulated Average (dBm)		
			3GPP RMC	3GPP HSDPA	3GPP HSUPA
UMTS Band 5 (850 MHz)	Inactive	Maximum	23.0	23.0	22.0
		Nominal	22.5	22.5	21.5
UMTS Band 2 (1900 MHz)	Inactive	Maximum	23.0	23.0	22.0
		Nominal	22.5	22.5	21.5

Mode / Band	Modulated Average (dBm)
IEEE 802.11b (2.4 GHz)	15.5
	15.0
IEEE 802.11g (2.4 GHz)	14.0
	13.5
IEEE 802.11n (2.4 GHz)	11.5
	11.0
IEEE 802.11a (5 GHz) 20 MHz BW	7.5
	7.0
IEEE 802.11n (5 GHz) 20 MHz BW	7.5
	7.0
IEEE 802.11n (5 GHz) 40 MHz BW	7.5
	7.0
Bluetooth	10.0
	9.5
Bluetooth LE	6.5
	6.0

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 4 of 53

1.4 DUT Antenna Locations

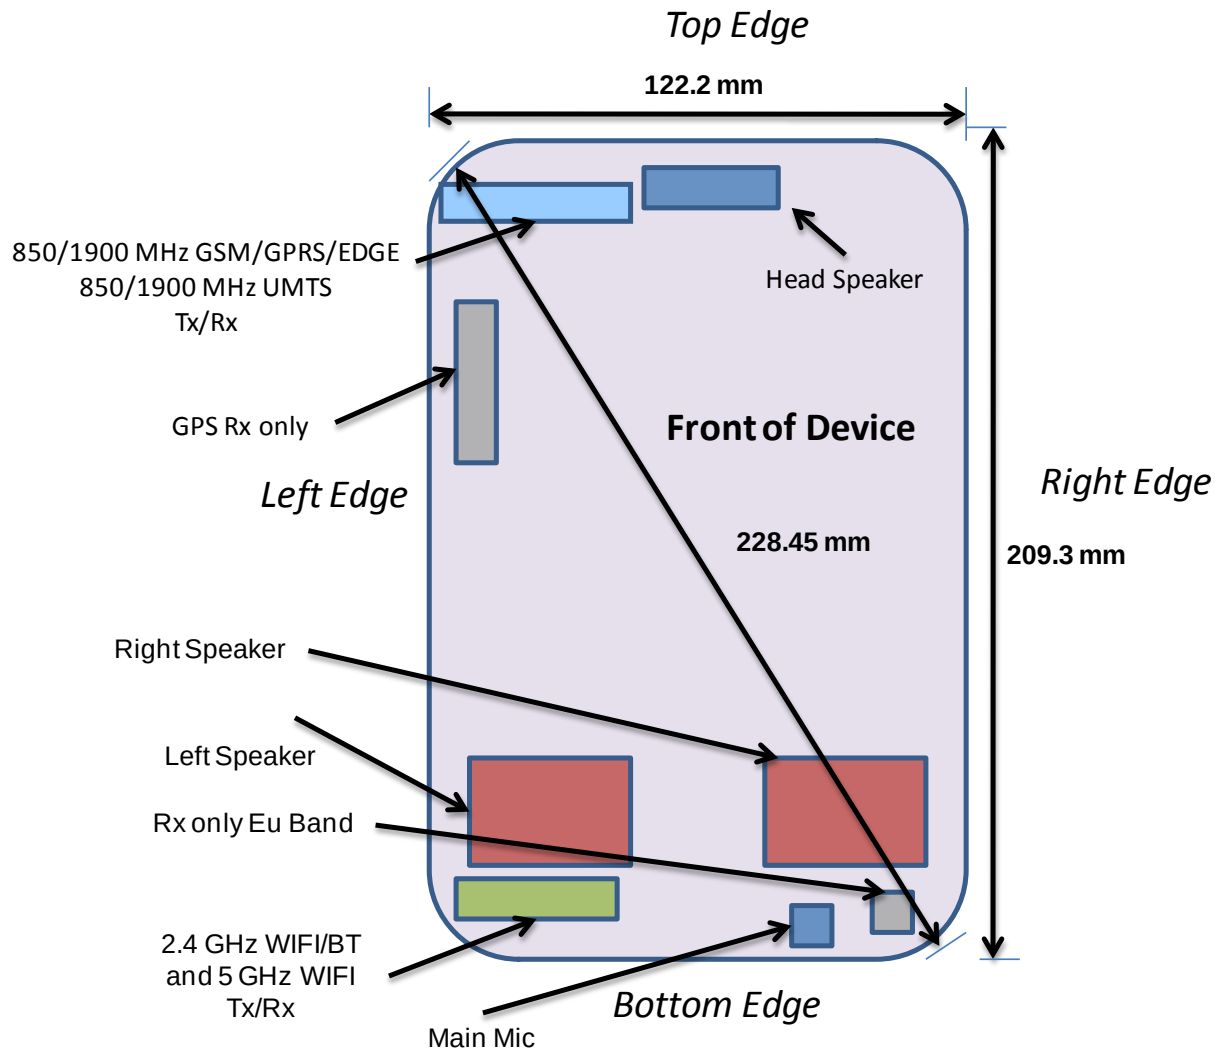

Note: Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC Filing.

Figure 1-1
DUT Antenna Locations

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 5 of 53

1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D05v01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v05 3) procedures.

Table 1-1
Simultaneous Transmission Scenarios

Ref.	Simultaneous Transmit Configurations	Head	Body
		IEEE 1528, Supp C	FCC KDB 616217
1	GSM850 Voice + 2.4 GHz WIFI	Yes	
2	GSM850 Voice + 5 GHz WIFI	Yes	
3	GSM1900 Voice + 2.4 GHz WIFI	Yes	
4	GSM1900 Voice + 5 GHz WIFI	Yes	
5	UMTS 850 Voice + 2.4 GHz WIFI	Yes	
6	UMTS 850 Voice + 5 GHz WIFI	Yes	
7	UMTS 1900 Voice + 2.4 GHz WIFI	Yes	
8	UMTS 1900 Voice + 5 GHz WIFI	Yes	
9	UMTS 850 Voice/Data + 2.4 GHz WIFI	Yes	Yes
10	UMTS 1900 Voice/Data + 2.4 GHz WIFI	Yes	Yes
11	GPRS/EDGE 850 Data + 2.4 GHz WIFI		Yes
12	GPRS/EDGE 1900 Data + 2.4 GHz WIFI		Yes
13	UMTS 850 Voice + 2.4 GHz Bluetooth		Yes
14	UMTS 1900 Voice + 2.4 GHz Bluetooth		Yes
15	GPRS/EDGE 850 Voice+ 2.4 Bluetooth		Yes
16	GPRS/EDGE 1900 Voice + 2.4 Bluetooth		Yes
17	UMTS 850 Data + 5 GHz WIFI		Yes
18	UMTS 1900 Data + 5 GHz WIFI		Yes
19	GPRS/EDGE 850 Data + 5 GHz WIFI		Yes
20	GPRS/EDGE 1900 Data + 5 GHz WIFI		Yes
Notes:			
1. Bluetooth and 2.4 GHz WLAN and 5 GHz share the same antenna path and cannot transmit simultaneously.			

Note:

1. Per FCC KDB 616217 D04 4.3, when voice mode is limited to speaker mode or headset operations only, additional SAR testing for tablet voice use is not required. Therefore Voice standalone and simultaneous combinations are not evaluated for body configurations.
2. Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear voice call. Therefore, there are no new simultaneous transmission scenarios involving WIFI Direct in held-to-ear configurations.

1.6 SAR Test Exclusions Applied

(A) WIFI/BT

Per FCC KDB 447498 D01 v05, the SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth LE (rounded to the nearest mW) and the antenna to user separation distance, Bluetooth LE SAR was not required; $[(4/5) * \sqrt{2.441}] = 1.3 < 3.0$.

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 6 of 53

This device supports 20 MHz and 40 MHz Bandwidths for IEEE 802.11n for 5 GHz WIFI only. IEEE 802.11n was not evaluated for SAR since the average output power of 20 MHz and 40 MHz bandwidths was not more than 0.25 dB higher than the average output power of IEEE 802.11a.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v02.

When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.

1.7 Guidance Applied

- FCC OET Bulletin 65 Supplement C [June 2001]
- IEEE 1528-2003
- FCC KDB Publication 941225 D01-D04 (2G/3G)
- FCC KDB Publication 248227 D01v01r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v05 (General SAR Guidance)
- FCC KDB Publication 865664 D01-D02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 616217 D04v01 (Tablet SAR Consideration)

1.8 Device Serial Numbers

Several samples were used with identical hardware to support SAR testing. When the device is touching the user, the proximity sensors activate and hence the device is limited to a reduced power level. Additional samples were used for the SAR Testing that were limited to the reduced power levels (via manufacturer proprietary tools) and are indicated in the table below. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

	Head Serial Number	Body Reduced Power Serial	Body Max Power Serial
GSM/GPRS/EDGE 850	1604-2	1604-1	1604-3
UMTS 850	1604-2	1604-1	1604-3
GSM/GPRS/EDGE 1900	1604-1	1604-1	1604-3
UMTS 1900	1604-1	1604-1	1604-3
Bluetooth	-	-	1604-1
2.4 GHz WLAN	1604-4	-	1604-1
5 GHz WLAN	1604-4	-	1604-4

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 7 of 53

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [24]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

2.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 2-1).

Equation 2-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 8 of 53

3

DOSIMETRIC ASSESSMENT

3.1 Measurement Procedure

The evaluation was performed using the following procedure:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01 (See Table 3-1).
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01 (See Table 3-1). On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. The data was extrapolated to the surface of the outer-shell of the phantom. The combined distance extrapolated was the combined distance from the center of the dipoles 2.7mm away from the tip of the probe housing plus the 1.2 mm distance between the surface and the lowest measuring point. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 3-1
Sample SAR Area Scan

Table 3-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

FCC ID: A3LSMT311		SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet			Page 9 of 53

4

DEFINITION OF REFERENCE POINTS

4.1 EAR REFERENCE POINT

Figure 4-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 4-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 4-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 4-1
Close-Up Side view
of ERP

4.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 4-3). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 4-2
Front, back and side view of SAM Twin Phantom

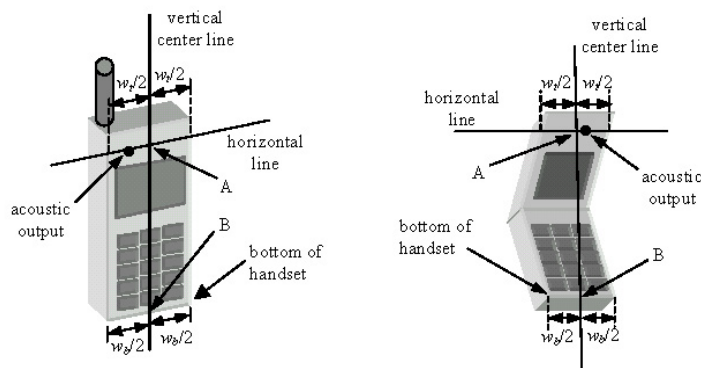


Figure 4-3
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: A3LSMT311	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 10 of 53

5

TEST CONFIGURATION POSITIONS FOR HANDSETS

5.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. Due to the width of the grips on the device holder the DUT could not be gripped using the standard holder grip setup, but instead the device was supported by the device holder with the grips supporting the bottom of the device.

5.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 5-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

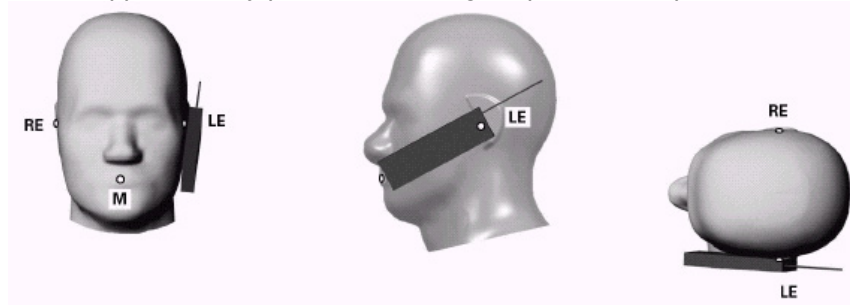


Figure 5-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 5-2).
6. Due to the width of the grips on the device holder, the DUT could not be gripped using the standard holder grip setup, but instead the device was supported by the device holder with the grips supporting the bottom of the device.

5.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 11 of 53

position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 5-2).

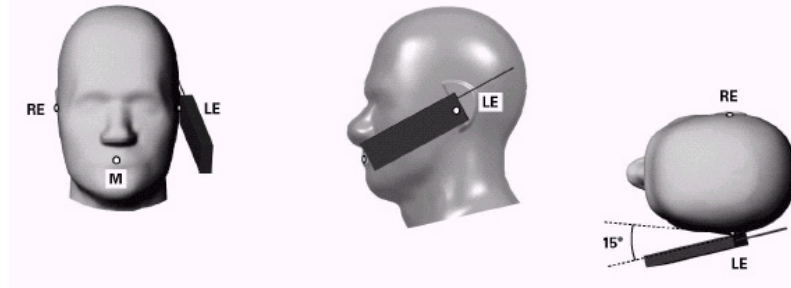


Figure 5-2 Front, Side and Top View of Ear/15° Tilt Position




Figure 5-3

Side view w/ relevant markings

5.4 SAR Testing for Tablet per KDB Publication 616217 D04v01

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Exclusion Threshold in KDB 447498 D01v05 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

5.5 Additional Test Positions due to Proximity Sensor Considerations

This device uses a proximity sensor to reduce voice/ data powers in tablet-device use conditions.

While the device is touching the user on the antenna, the proximity sensors activate and thus reduce the maximum output power allowed. However, when the device is moved beyond the sensor triggering distance, the sensors de-activate and thus maximum output power is no longer limited. Therefore, an additional exposure condition is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level.

FCC KDB 616217 D04 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional exposure conditions. Since the capacitive proximity sensor activation distance for the back side of the device is 11 mm, a conservative distance of 10 mm was tested for SAR on the back side at maximum power. Since the capacitive proximity sensor activation distance for the top edge of the device is 8 mm, a conservative distance of 7 mm was tested for SAR on the top edge, at maximum power. Sensor triggering distance summary data is included in Appendix G. The capacitive proximity sensor does not trigger power reduction from the front of the device.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antenna.\

FCC ID: A3LSMT311	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 SAMSUNG	Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 12 of 53

6 RF EXPOSURE LIMITS

6.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 6-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 13 of 53

7 FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v05, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r02.

7.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01 "SAR Measurement Procedures for 3G Devices" v02, October 2007.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a "point SAR" at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

7.3 SAR Measurement Conditions for UMTS

7.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s".

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

7.3.2 Head SAR Measurements

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all "1s". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 14 of 53

7.3.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

7.3.4 Procedures Used to Establish RF Signal for SAR HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. Body exposure conditions are typically applicable to these devices, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with UMTS and requires an active DPCCH. The default test configuration is to measure SAR in UMTS without HSDPA, with an established radio link between the DUT and a communication test set with 12.2 kbps RMC mode configured in Test Loop Mode 1; and tested with HSDPA with FRC and a 12.2 kbps RMC using the highest SAR configuration in UMTS. SAR is selectively confirmed for other physical channel configurations according to output power, exposure conditions and device operating capabilities. Maximum output power is verified according to 3GPP TS 23.121 (Release 5) and SAR must be measured according to these maximum output conditions.

7.3.5 SAR Measurement Conditions for HSUPA Data Devices

SAR for body exposure configurations are measured according to the 'Body SAR Measurements' procedures in the 'WCDMA Handsets' section of the KDB 941225 D01 FCC 3G document. In addition, Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least ¼ dB higher of that measured without HSPA in 12.2 kbps RMC mode or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP is applicable for head exposure, SAR is not required when the maximum output of each RF channel with HSPA is less than ¼ dB higher than that measured using 12.2 kbps RMC; otherwise, the same HSPA configuration used for body measurements should be used to test for head exposure.

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and EDCH configurations for HSPA should be configured according to the β values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of the FCC 3G document.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{1s}^{(1)}$	β_{cc}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK} \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{1s} = \beta_{1s}/\beta_c = 30/15 \Leftrightarrow \beta_{1s} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{1s}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 15 of 53

7.4 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v01r02 for more details.

7.4.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

7.4.2 Frequency Channel Configurations [27]

For 2.4 GHz, the highest average RF output power channel between the low, mid and high channel at the lowest data rate was selected for SAR evaluation in 802.11b mode. 802.11g/n modes and higher data rates for 802.11b were additionally evaluated for SAR if the output power of the respective mode was 0.25 dB or higher than the powers of the SAR configurations tested in the 802.11b mode.

For 5 GHz, the highest average RF output power channel across the default test channels at the lowest data rate was selected for SAR evaluation in 802.11a. When the adjacent channels are higher in power than the default channels, these “required channels” were considered instead of the default channels for SAR testing. 802.11n modes and higher data rates for 802.11a/n were evaluated only if the respective mode was 0.25 dB or higher than the 802.11a mode.

If the maximum extrapolated peak SAR of the zoom scan for the highest output channel was less than 1.6 W/kg or if the 1g averaged SAR was less than 0.8 W/kg, SAR testing was not required for the other test channels in the band.

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 16 of 53

8 RF CONDUCTED POWERS

8.1 GSM Conducted Powers

Table 8-1
Maximum GSM/GPRS Average RF Conducted Powers
(Representing both Capacitive Sensor and IR Sensor Inactive)

		Maximum Burst-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	31.93	31.99	30.00	28.53	26.89	25.55	25.53	25.53	22.55
	190	31.99	32.00	30.09	28.60	27.00	25.67	25.67	25.60	22.67
	251	31.95	31.97	30.05	28.55	26.98	25.63	25.63	25.60	22.69
GSM 1900	512	29.61	29.59	27.58	25.73	24.76	24.98	24.97	24.93	22.18
	661	29.63	29.62	27.54	25.68	24.71	25.04	25.03	24.97	22.24
	810	29.63	29.60	27.67	25.81	24.83	25.06	25.01	24.99	22.23
		Calculated Maximum Frame-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	22.90	22.96	23.98	24.27	23.88	16.52	19.51	21.27	19.54
	190	22.96	22.97	24.07	24.34	23.99	16.64	19.65	21.34	19.66
	251	22.92	22.94	24.03	24.29	23.97	16.60	19.61	21.34	19.68
GSM 1900	512	20.58	20.56	21.56	21.47	21.75	15.95	18.95	20.67	19.17
	661	20.60	20.59	21.52	21.42	21.70	16.01	19.01	20.71	19.23
	810	20.60	20.57	21.65	21.55	21.82	16.03	18.99	20.73	19.22

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 17 of 53

Table 8-2
Reduced GSM/GPRS Average RF Conducted Powers
(Representing either Capacitive Sensor or IR Sensor Active)

		Maximum Burst-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	30.78	30.79	29.27	27.66	26.16	21.20	19.96	18.04	16.14
	190	30.82	30.81	29.28	27.70	26.22	21.32	20.06	18.12	16.28
	251	30.86	30.85	29.31	27.76	26.21	21.36	20.12	18.21	16.68
GSM 1900	512	23.15	23.19	20.59	19.01	17.75	19.09	16.08	14.03	12.53
	661	23.18	23.24	20.71	19.18	17.84	19.11	16.17	14.12	12.57
	810	23.21	23.24	20.72	19.19	17.89	19.21	16.17	14.15	12.62
		Calculated Maximum Frame-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	21.75	21.76	23.25	23.40	23.15	12.17	13.94	13.78	13.13
	190	21.79	21.78	23.26	23.44	23.21	12.29	14.04	13.86	13.27
	251	21.83	21.82	23.29	23.50	23.20	12.33	14.10	13.95	13.67
GSM 1900	512	14.12	14.16	14.57	14.75	14.74	10.06	10.06	9.77	9.52
	661	14.15	14.21	14.69	14.92	14.83	10.08	10.15	9.86	9.56
	810	14.18	14.21	14.70	14.93	14.88	10.18	10.15	9.89	9.61

Note:

1. Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
2. The bolded GPRS modes were selected for SAR testing according to the highest frame-averaged output power table according to KDB 941225 D03v01.
3. GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
4. EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.
5. This device does not support evolved EDGE (eEDGE).

GSM Class: B
GPRS Multislot class: 33 (Max 4 Tx uplink slots)
EDGE Multislot class: 33 (Max 4 Tx uplink slots)
DTM Multislot Class: N/A



Figure 8-1
Power Measurement Setup

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 18 of 53

8.2 UMTS Conducted Powers

Table 8-3
Maximum UMTS Average RF Conducted Powers
(Representing both Capacitive Sensor and IR Sensor Inactive)

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	22.58	22.44	22.41	22.87	22.72	22.92	-
99		12.2 kbps AMR	22.42	22.33	22.27	22.90	22.70	22.86	-
6	HSDPA	Subtest 1	22.55	22.44	22.40	22.56	22.45	22.69	0
6		Subtest 2	21.52	21.40	21.40	21.59	21.47	21.78	0
6		Subtest 3	21.23	21.14	21.10	21.39	21.20	21.47	0.5
6		Subtest 4	21.04	20.90	20.87	20.85	20.72	21.06	0.5
6	HSUPA	Subtest 1	21.68	21.53	21.58	21.78	21.63	21.89	0
6		Subtest 2	19.71	19.63	19.55	19.88	19.63	19.88	2
6		Subtest 3	20.40	20.24	20.27	20.70	20.43	20.76	1
6		Subtest 4	19.89	19.78	19.88	19.78	19.89	20.15	2
6		Subtest 5	21.82	21.70	21.68	21.93	21.82	21.94	0

Table 8-4
Reduced UMTS Average RF Conducted Powers
(Representing either Capacitive Sensor or IR Sensor Active)

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	19.94	19.85	19.89	15.86	15.62	15.75	-
99		12.2 kbps AMR	19.84	19.83	19.79	15.83	15.58	15.70	-
6	HSDPA	Subtest 1	19.95	19.81	19.83	15.65	15.57	15.71	0
6		Subtest 2	19.56	19.38	19.40	15.43	15.39	15.52	0
6		Subtest 3	19.33	19.19	19.20	15.25	15.11	15.27	0.5
6		Subtest 4	19.14	18.92	19.03	14.94	14.89	14.98	0.5
6	HSUPA	Subtest 1	19.66	19.54	19.51	14.82	14.77	14.85	0
6		Subtest 2	19.50	19.33	19.79	13.44	13.53	13.57	2
6		Subtest 3	17.90	17.83	17.90	14.41	14.47	14.54	1
6		Subtest 4	17.86	17.72	17.73	13.70	13.67	13.78	2
6		Subtest 5	19.92	19.73	19.77	15.46	15.35	15.42	0

UMTS SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v02. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

This device does not support DC-HSDPA.

It is expected by the manufacturer that MPR for some HSUPA subtests may be as low as 0 dB and up to 2 dB more than specified by 3GPP according to the chipset implementation in this model.



Figure 8-2
Power Measurement Setup

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 19 of 53

8.3 WLAN/BT Conducted Powers

Table 8-5
IEEE 802.11b Average RF Power

Mode	Freq	Channel	802.11b (2.4 GHz) Conducted Power [dBm]			
			Data Rate [Mbps]			
	[MHz]		1	2	5.5	11
802.11b	2412	1*	14.82	14.86	14.89	14.95
802.11b	2437	6*	15.17	15.39	15.26	15.40
802.11b	2462	11*	15.28	15.36	15.50	15.50

Table 8-6
IEEE 802.11g Average RF Power

Mode	Freq	Channel	802.11g (2.4 GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
	[MHz]		6	9	12	18	24	36	48	54
802.11g	2412	1	12.86	12.91	12.90	12.96	13.03	13.08	13.05	12.95
802.11g	2437	6	13.49	13.46	13.38	13.53	13.52	13.50	13.61	13.63
802.11g	2462	11	13.42	13.31	13.37	13.55	13.42	13.44	13.50	13.52

Table 8-7
IEEE 802.11n Average RF Power

Mode	Freq	Channel	802.11n (2.4 GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
	[MHz]		6.5	13	20	26	39	52	58	65
802.11n	2412	1	10.74	10.69	10.75	10.79	11.02	11.01	10.95	10.90
802.11n	2437	6	11.14	11.09	11.15	11.20	11.39	11.50	11.28	11.24
802.11n	2462	11	11.15	11.25	11.23	11.25	11.33	11.32	11.38	11.39

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 20 of 53

Table 8-8
IEEE 802.11a Average RF Power

Mode	Freq	Channel	802.11a (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
	[MHz]		6	9	12	18	24	36	48	54
802.11a	5180	36*	7.01	6.90	6.95	6.96	6.88	6.86	6.90	6.85
802.11a	5200	40	6.58	6.55	6.53	6.56	6.59	6.61	6.64	6.56
802.11a	5220	44	6.62	6.57	6.60	6.69	6.68	6.58	6.68	6.69
802.11a	5240	48*	6.36	6.32	6.36	6.41	6.38	6.43	6.35	6.41
802.11a	5260	52*	6.54	6.53	6.51	6.53	6.54	6.57	6.49	6.54
802.11a	5280	56	6.50	6.52	6.57	6.55	6.45	6.54	6.47	6.51
802.11a	5300	60	6.42	6.49	6.43	6.45	6.38	6.40	6.37	6.38
802.11a	5320	64*	6.16	6.20	6.21	6.18	6.12	6.20	6.20	6.16
802.11a	5500	100	6.75	6.75	6.82	6.80	6.77	6.75	6.79	6.72
802.11a	5520	104*	6.65	6.66	6.63	6.64	6.70	6.72	6.65	6.68
802.11a	5540	108	6.78	6.73	6.81	6.81	6.84	6.81	6.81	6.85
802.11a	5560	112	6.69	6.73	6.66	6.72	6.66	6.69	6.72	6.64
802.11a	5580	116*	6.65	6.63	6.64	6.72	6.66	6.60	6.60	6.61
802.11a	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5660	132	6.64	6.67	6.63	6.60	6.68	6.60	6.68	6.71
802.11a	5680	136*	6.55	6.55	6.53	6.57	6.51	6.50	6.53	6.56
802.11a	5700	140	6.58	6.54	6.57	6.53	6.56	6.60	6.57	6.60
802.11a	5745	149*	6.76	6.74	6.83	6.76	6.82	6.82	6.77	6.78
802.11a	5765	153	6.96	6.98	7.01	7.02	6.98	7.01	6.99	6.97
802.11a	5785	157*	6.78	6.75	6.76	6.81	6.73	6.83	6.84	6.78
802.11a	5805	161*	6.90	6.90	6.87	6.95	6.90	6.92	6.96	6.90
802.11a	5825	165	6.61	6.68	6.56	6.65	6.64	6.58	6.67	6.67

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band.

(*) – indicates default channels per KDB Publication 248227 D01v01r02. When the adjacent channels are higher in power then the default channels, these “required channels” are considered for SAR testing instead of the default channels.

FCC ID: A3LSMT311	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 21 of 53

Table 8-9
IEEE 802.11n Average RF Power – 20 MHz Bandwidth

Mode	Freq	Channel	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
	[MHz]		Data Rate [Mbps]							
			6.5	13	20	26	39	52	58	65
802.11n	5180	36	6.56	6.50	6.53	6.47	6.50	6.46	6.55	6.45
802.11n	5200	40	6.56	6.63	6.52	6.53	6.60	6.58	6.57	6.54
802.11n	5220	44	5.96	6.52	6.54	6.51	6.53	6.63	6.61	6.52
802.11n	5240	48	6.54	5.92	6.03	5.97	5.92	5.98	6.00	5.99
802.11n	5260	52	6.48	6.53	6.53	6.50	6.57	6.50	6.59	6.54
802.11n	5280	56	6.15	5.93	5.93	5.84	5.83	5.85	5.84	5.94
802.11n	5300	60	5.98	6.13	6.14	6.14	6.19	6.11	6.15	6.17
802.11n	5320	64	5.87	5.97	5.94	6.03	5.96	5.98	6.03	5.99
802.11n	5500	100	6.59	5.82	5.88	5.84	5.92	5.94	5.85	5.83
802.11n	5520	104	6.37	6.59	6.58	6.62	6.63	6.65	6.56	6.59
802.11n	5540	108	6.31	6.39	6.38	6.35	6.42	6.38	6.37	6.35
802.11n	5560	112	6.46	6.35	6.35	6.29	6.27	6.38	6.37	6.32
802.11n	5580	116	6.26	6.51	6.45	6.46	6.45	6.46	6.43	6.50
802.11n	5600	120	N/A	6.33	6.30	6.29	6.24	6.24	6.32	6.22
802.11n	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5660	132	6.84	6.84	6.80	6.85	6.81	6.90	6.88	6.81
802.11n	5680	136	6.73	6.71	6.77	6.71	6.73	6.78	6.70	6.70
802.11n	5700	140	6.81	6.79	6.78	6.81	6.80	6.87	6.82	6.86
802.11n	5745	149	7.01	7.02	7.01	6.97	7.06	7.07	7.01	7.02
802.11n	5765	153	6.80	6.75	6.78	6.77	6.84	6.80	6.77	6.76
802.11n	5785	157	6.75	6.80	6.75	6.73	6.76	6.73	6.72	6.77
802.11n	5805	161	6.76	6.77	6.72	6.73	6.76	6.73	6.75	6.72
802.11n	5825	165	6.93	6.94	6.97	6.94	6.91	6.95	6.98	6.90

Table 8-10
IEEE 802.11n Average RF Power – 40 MHz Bandwidth

Mode	Freq	Channel	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
	[MHz]		Data Rate [Mbps]							
			13.5/15	27/30	40.5/45	54/60	81/90	108/120	121.5/135	135/150
802.11n	5190	38	6.56	6.59	6.51	6.60	6.62	6.61	6.53	6.54
802.11n	5230	46	6.70	6.66	6.71	6.75	6.76	6.76	6.77	6.70
802.11n	5270	54	6.69	6.65	6.64	6.69	6.71	6.78	6.72	6.74
802.11n	5310	62	6.43	6.41	6.50	6.47	6.44	6.49	6.43	6.45
802.11n	5510	102	6.79	6.85	6.78	6.82	6.85	6.77	6.83	6.77
802.11n	5550	110	6.71	6.77	6.76	6.76	6.75	6.71	6.77	6.67
802.11n	5590	118	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5630	126	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5670	134	6.66	6.73	6.72	6.69	6.70	6.62	6.68	6.65
802.11n	5755	151	6.96	7.01	7.00	6.93	6.96	7.00	6.99	6.92
802.11n	5795	159	6.55	6.62	6.53	6.55	6.58	6.55	6.54	6.58




Figure 8-3
Power Measurement Setup

FCC ID: A3LSMT311	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 22 of 53

Table 8-11
Bluetooth RF Conducted Powers

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Peak Conducted Power		Avg Conducted Power	
			[dBm]	[mW]	[dBm]	[mW]
2402	1.0	0	9.514	8.941	9.3619	8.634
2441	1.0	39	9.735	9.408	9.5334	8.981
2480	1.0	78	9.200	8.318	8.9524	7.857
2402	2.0	0	8.667	7.357	6.3866	4.352
2441	2.0	39	8.759	7.514	6.3759	4.341
2480	2.0	78	8.092	6.445	5.5885	3.621
2402	3.0	0	9.063	8.059	6.4550	4.421
2441	3.0	39	9.198	8.314	6.4719	4.438
2480	3.0	78	8.549	7.160	5.6517	3.674

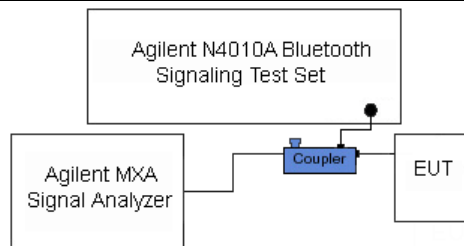


Figure 8-4
Power Measurement Setup

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes:

- For 2.4 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11b were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
- For 5 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11a were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11n 20 MHz and 40 MHz) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
- When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other channels is not required. Otherwise, the other default (or corresponding required) test channels were additionally tested using the lowest data rate.
- The bolded data rate and channel above were tested for SAR.

FCC ID: A3LSMT311	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 23 of 53

9 SYSTEM VERIFICATION

9.1 Tissue Verification

Table 9-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (C°)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
04/16/2013	835H	22.5	820	0.910	41.468	0.898	41.571	1.34%	-0.25%
			835	0.924	41.290	0.900	41.500	2.67%	-0.51%
			850	0.938	41.116	0.916	41.500	2.40%	-0.93%
04/15/2013	1900H	22.1	1850	1.399	40.180	1.400	40.000	-0.07%	0.45%
			1880	1.433	40.037	1.400	40.000	2.36%	0.09%
			1910	1.461	39.911	1.400	40.000	4.36%	-0.22%
04/18/2013	2450H	22.7	2401	1.782	38.033	1.758	39.298	1.37%	-3.22%
			2450	1.812	37.839	1.800	39.200	0.67%	-3.47%
			2499	1.888	37.604	1.852	39.135	1.94%	-3.91%
04/15/2013	5200H-5800H	23.1	5180	4.489	37.065	4.639	36.020	-3.23%	2.90%
			5200	4.503	37.085	4.660	36.000	-3.37%	3.01%
			5260	4.584	36.992	4.720	35.940	-2.88%	2.93%
			5300	4.607	36.977	4.760	35.900	-3.21%	3.00%
			5500	4.815	36.719	4.965	35.650	-3.02%	3.00%
			5540	4.851	36.626	5.007	35.590	-3.12%	2.91%
			5765	5.109	36.342	5.235	35.335	-2.41%	2.85%
			5800	5.151	36.239	5.270	35.300	-2.26%	2.66%
04/19/2013	835B	22.5	820	1.001	54.145	0.969	55.258	3.30%	-2.01%
			835	1.016	54.026	0.970	55.200	4.74%	-2.13%
			850	1.031	53.804	0.988	55.154	4.35%	-2.45%
04/22/2013	1900B	21.4	1850	1.511	51.073	1.520	53.300	-0.59%	-4.18%
			1880	1.547	50.917	1.520	53.300	1.78%	-4.47%
			1910	1.577	50.830	1.520	53.300	3.75%	-4.63%
05/03/2013	1900B	22.8	1850	1.540	51.761	1.520	53.300	1.32%	-2.89%
			1880	1.550	51.438	1.520	53.300	1.97%	-3.49%
			1910	1.594	51.260	1.520	53.300	4.87%	-3.83%
04/24/2013	2450B	22.8	2401	1.917	51.867	1.903	52.765	0.74%	-1.70%
			2450	1.983	51.623	1.950	52.700	1.69%	-2.04%
			2499	2.049	51.498	2.019	52.638	1.49%	-2.17%
04/25/2013	2450B	23.2	2401	1.942	52.340	1.903	52.765	2.05%	-0.81%
			2450	1.979	52.092	1.950	52.700	1.49%	-1.15%
			2499	2.066	51.850	2.019	52.638	2.33%	-1.50%
06/03/2013	5200B-5800B	22.9	5180	5.368	47.109	5.276	49.041	1.74%	-3.94%
			5200	5.362	46.974	5.299	49.014	1.19%	-4.16%
			5220	5.397	46.853	5.323	48.987	1.39%	-4.36%
			5260	5.508	46.863	5.369	48.906	2.59%	-4.18%
			5300	5.539	46.972	5.416	48.851	2.27%	-3.85%
			5540	5.874	46.506	5.696	48.526	3.13%	-4.16%
			5560	5.859	46.532	5.720	48.499	2.43%	-4.06%
			5600	5.877	46.246	5.766	48.444	1.93%	-4.54%
			5680	6.041	46.308	5.860	48.336	3.09%	-4.20%
			5765	6.121	45.956	5.959	48.220	2.72%	-4.70%
			5785	6.192	46.027	5.982	48.242	3.51%	-4.59%
			5800	6.222	46.066	6.000	48.200	3.70%	-4.43%
			5805	6.102	46.296	6.005	48.166	1.62%	-3.88%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per IEEE 1528 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 24 of 53

9.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 9-2
System Verification Results

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
C	835	HEAD	04/16/2013	23.5	22.7	0.100	4d026	3022	0.961	9.390	9.610	2.34%
D	1900	HEAD	04/15/2013	22.0	21.2	0.100	5d148	3288	3.870	39.700	38.700	-2.52%
C	2450	HEAD	04/18/2013	24.4	22.9	0.100	719	3022	5.330	52.700	53.300	1.14%
E	5200	HEAD	04/15/2013	24.6	23.6	0.040	1120	3920	3.140	76.000	78.500	3.29%
E	5300	HEAD	04/15/2013	24.4	23.6	0.040	1120	3920	3.120	78.700	78.000	-0.89%
E	5500	HEAD	04/15/2013	24.4	23.5	0.040	1120	3920	3.030	80.100	75.750	-5.43%
E	5800	HEAD	04/15/2013	24.1	23.2	0.040	1120	3920	3.060	74.900	76.500	2.14%
G	835	BODY	04/19/2013	24.5	22.5	0.100	4d132	3209	0.996	9.360	9.960	6.41%
D	1900	BODY	04/22/2013	21.9	20.7	0.100	5d148	3288	4.250	40.800	42.500	4.17%
B	1900	BODY	05/03/2013	23.9	22.8	0.100	5d080	3287	4.000	40.300	40.000	-0.74%
F	2450	BODY	04/24/2013	23.1	22.6	0.100	797	3258	4.860	49.600	48.600	-2.02%
B	2450	BODY	04/25/2013	24.4	23.2	0.100	719	3287	5.250	51.600	52.500	1.74%
A	5200	BODY	06/03/2013	23.4	22.3	0.100	1057	3589	7.380	75.500	73.800	-2.25%
A	5300	BODY	06/03/2013	23.4	22.3	0.100	1057	3589	7.880	75.300	78.800	4.65%
A	5500	BODY	06/03/2013	23.4	22.3	0.100	1057	3589	7.600	80.800	76.000	-5.94%
A	5600	BODY	06/03/2013	23.5	22.4	0.100	1057	3589	8.070	80.300	80.700	0.50%
A	5800	BODY	06/03/2013	23.5	22.4	0.100	1057	3589	7.210	75.100	72.100	-3.99%

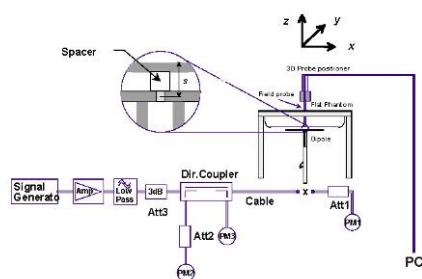


Figure 9-1
System Verification Setup Diagram



Figure 9-2
System Verification Setup Photo

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 25 of 53

10 SAR DATA SUMMARY

10.1 Standalone Head SAR Data

Table 10-1
GSM 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	31.0	30.82	0.06	Right	Cheek	1604-2	1:8.3	0.312	1.042	0.325	A1
836.60	190	GSM 850	GSM	31.0	30.82	-0.16	Right	Tilt	1604-2	1:8.3	0.233	1.042	0.243	
836.60	190	GSM 850	GSM	31.0	30.82	0.01	Left	Cheek	1604-2	1:8.3	0.123	1.042	0.128	
836.60	190	GSM 850	GSM	31.0	30.82	0.00	Left	Tilt	1604-2	1:8.3	0.118	1.042	0.123	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 10-2
UMTS 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	20.0	19.85	-0.02	Right	Cheek	1604-2	1:1	0.322	1.035	0.333	A2
836.60	4183	UMTS 850	RMC	20.0	19.85	-0.02	Right	Tilt	1604-2	1:1	0.257	1.035	0.266	
836.60	4183	UMTS 850	RMC	20.0	19.85	0.00	Left	Cheek	1604-2	1:1	0.166	1.035	0.172	
836.60	4183	UMTS 850	RMC	20.0	19.85	0.04	Left	Tilt	1604-2	1:1	0.169	1.035	0.175	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 10-3
GSM 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	23.5	23.18	-0.01	Right	Cheek	1604-1	1:8.3	0.312	1.076	0.336	A3
1880.00	661	GSM 1900	GSM	23.5	23.18	0.03	Right	Tilt	1604-1	1:8.3	0.237	1.076	0.255	
1880.00	661	GSM 1900	GSM	23.5	23.18	0.02	Left	Cheek	1604-1	1:8.3	0.116	1.076	0.125	
1880.00	661	GSM 1900	GSM	23.5	23.18	-0.03	Left	Tilt	1604-1	1:8.3	0.102	1.076	0.110	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 26 of 53

Table 10-4
UMTS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	16.0	15.62	0.03	Right	Cheek	1604-1	1:1	0.376	1.091	0.410	A4
1880.00	9400	UMTS 1900	RMC	16.0	15.62	0.02	Right	Tilt	1604-1	1:1	0.325	1.091	0.355	
1880.00	9400	UMTS 1900	RMC	16.0	15.62	0.00	Left	Cheek	1604-1	1:1	0.172	1.091	0.188	
1880.00	9400	UMTS 1900	RMC	16.0	15.62	0.01	Left	Tilt	1604-1	1:1	0.148	1.091	0.161	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 10-5
DTS Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
2462	11	IEEE 802.11b	DSSS	15.5	15.28	-0.11	Right	Cheek	1604-4	1	1:1	0.002	1.052	0.002	A5
2462	11	IEEE 802.11b	DSSS	15.5	15.28	-0.15	Right	Tilt	1604-4	1	1:1	0.001	1.052	0.001	
2462	11	IEEE 802.11b	DSSS	15.5	15.28	0.20	Left	Cheek	1604-4	1	1:1	0.002	1.052	0.002	
2462	11	IEEE 802.11b	DSSS	15.5	15.28	0.13	Left	Tilt	1604-4	1	1:1	0.001	1.052	0.001	
5765	153	IEEE 802.11a	OFDM	7.5	6.96	0.13	Right	Cheek	1604-4	6	1:1	0.001	1.132	0.001	
5765	153	IEEE 802.11a	OFDM	7.5	6.96	-0.15	Right	Tilt	1604-4	6	1:1	0.000	1.132	0.000	
5765	153	IEEE 802.11a	OFDM	7.5	6.96	-0.20	Left	Cheek	1604-4	6	1:1	0.001	1.132	0.001	A7
5765	153	IEEE 802.11a	OFDM	7.5	6.96	0.00	Left	Tilt	1604-4	6	1:1	0.001	1.132	0.001	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 10-6
NII Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
5180	36	IEEE 802.11a	OFDM	7.5	7.01	0.18	Right	Cheek	1604-4	6	1:1	0.001	1.119	0.001	
5180	36	IEEE 802.11a	OFDM	7.5	7.01	0.11	Right	Tilt	1604-4	6	1:1	0.000	1.119	0.000	
5180	36	IEEE 802.11a	OFDM	7.5	7.01	-0.15	Left	Cheek	1604-4	6	1:1	0.000	1.119	0.000	
5180	36	IEEE 802.11a	OFDM	7.5	7.01	-0.12	Left	Tilt	1604-4	6	1:1	0.002	1.119	0.002	
5260	52	IEEE 802.11a	OFDM	7.5	6.54	0.12	Right	Cheek	1604-4	6	1:1	0.003	1.247	0.004	
5260	52	IEEE 802.11a	OFDM	7.5	6.54	0.20	Right	Tilt	1604-4	6	1:1	0.000	1.247	0.000	
5260	52	IEEE 802.11a	OFDM	7.5	6.54	-0.20	Left	Cheek	1604-4	6	1:1	0.001	1.247	0.001	
5260	52	IEEE 802.11a	OFDM	7.5	6.54	0.16	Left	Tilt	1604-4	6	1:1	0.001	1.247	0.001	
5540	108	IEEE 802.11a	OFDM	7.5	6.78	0.11	Right	Cheek	1604-4	6	1:1	0.004	1.180	0.005	A6
5540	108	IEEE 802.11a	OFDM	7.5	6.78	0.12	Right	Tilt	1604-4	6	1:1	0.000	1.180	0.000	
5540	108	IEEE 802.11a	OFDM	7.5	6.78	-0.11	Left	Cheek	1604-4	6	1:1	0.000	1.180	0.000	
5540	108	IEEE 802.11a	OFDM	7.5	6.78	0.14	Left	Tilt	1604-4	6	1:1	0.001	1.180	0.001	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 27 of 53

10.2 Standalone Body SAR Data

Table 10-7
GSM/UMTS Body SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GPRS	29.5	28.60	0.03	10 mm	1604-3	3	1:2.76	back	0.249	1.230	0.306	
824.20	128	GSM 850	GPRS	28.0	27.66	-0.07	0 mm	1604-1	3	1:2.76	back	0.916	1.081	0.990	A8
836.60	190	GSM 850	GPRS	28.0	27.70	0.00	0 mm	1604-1	3	1:2.76	back	0.900	1.072	0.965	
848.80	251	GSM 850	GPRS	28.0	27.76	-0.05	0 mm	1604-1	3	1:2.76	back	0.884	1.057	0.934	
836.60	190	GSM 850	GPRS	29.5	28.60	0.08	7 mm	1604-3	3	1:2.76	top	0.287	1.230	0.353	
836.60	190	GSM 850	GPRS	28.0	27.70	-0.05	0 mm	1604-1	3	1:2.76	top	0.464	1.072	0.497	
836.60	190	GSM 850	GPRS	29.5	28.60	0.05	0 mm	1604-3	3	1:2.76	left	0.319	1.230	0.392	
824.20	128	GSM 850	GPRS	28.0	27.66	-0.06	0 mm	1604-1	3	1:2.76	back	0.870	1.081	0.940	
836.60	4183	UMTS 850	RMC	23.0	22.44	-0.02	10 mm	1604-3	N/A	1:1	back	0.308	1.138	0.351	
836.60	4183	UMTS 850	RMC	20.0	19.85	-0.12	0 mm	1604-1	N/A	1:1	back	0.443	1.035	0.459	A9
836.60	4183	UMTS 850	RMC	23.0	22.44	0.01	7 mm	1604-3	N/A	1:1	top	0.187	1.138	0.213	
836.60	4183	UMTS 850	RMC	20.0	19.85	0.02	0 mm	1604-1	N/A	1:1	top	0.233	1.035	0.241	
836.60	4183	UMTS 850	RMC	23.0	22.44	0.03	0 mm	1604-3	N/A	1:1	left	0.201	1.138	0.229	
1880.00	661	GSM 1900	GPRS	28.0	27.54	0.02	10 mm	1604-3	2	1:4.15	back	0.563	1.112	0.626	
1880.00	661	GSM 1900	GPRS	25.0	24.71	-0.07	10 mm	1604-3	4	1:2.076	back	0.551	1.069	0.589	
1880.00	661	GSM 1900	GPRS	19.5	19.18	0.00	0 mm	1604-1	3	1:2.76	back	0.669	1.076	0.720	A10
1880.00	661	GSM 1900	GPRS	28.0	27.54	0.02	7 mm	1604-3	2	1:4.15	top	0.649	1.112	0.722	
1880.00	661	GSM 1900	GPRS	19.5	19.18	-0.02	0 mm	1604-1	3	1:2.76	top	0.299	1.076	0.322	
1880.00	661	GSM 1900	GPRS	28.0	27.54	0.02	0 mm	1604-3	2	1:4.15	left	0.488	1.112	0.543	
1880.00	9400	UMTS 1900	RMC	23.0	22.72	0.00	10 mm	1604-3	N/A	1:1	back	0.619	1.067	0.660	
1852.40	9262	UMTS 1900	RMC	16.0	15.86	-0.01	0 mm	1604-1	N/A	1:1	back	0.680	1.033	0.702	
1880.00	9400	UMTS 1900	RMC	16.0	15.62	-0.02	0 mm	1604-1	N/A	1:1	back	0.826	1.091	0.901	
1907.60	9538	UMTS 1900	RMC	16.0	15.75	-0.02	0 mm	1604-1	N/A	1:1	back	0.700	1.059	0.741	
1880.00	9400	UMTS 1900	RMC	23.0	22.72	0.02	7 mm	1604-3	N/A	1:1	top	0.675	1.067	0.720	
1880.00	9400	UMTS 1900	RMC	16.0	15.62	-0.12	0 mm	1604-1	N/A	1:1	top	0.349	1.091	0.381	
1880.00	9400	UMTS 1900	RMC	23.0	22.72	-0.01	0 mm	1604-3	N/A	1:1	left	0.585	1.067	0.624	
1880.00	9400	UMTS 1900	RMC	16.0	15.62	0.05	0 mm	1604-1	N/A	1:1	back	0.935	1.091	1.020	A11
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Blue entries indicate variability measurements.

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 28 of 53

Table 10-8
DTS Body SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
2412	1	IEEE 802.11b	DSSS	15.5	14.82	0.06	0 mm	1604-1	1	back	1:1	0.936	1.169	1.094	A12
2437	6	IEEE 802.11b	DSSS	15.5	15.17	0.02	0 mm	1604-1	1	back	1:1	0.838	1.079	0.904	
2462	11	IEEE 802.11b	DSSS	15.5	15.28	0.00	0 mm	1604-1	1	back	1:1	0.772	1.052	0.812	
2462	11	IEEE 802.11b	DSSS	15.5	15.28	-0.06	0 mm	1604-1	1	bottom	1:1	0.248	1.052	0.261	
2462	11	IEEE 802.11b	DSSS	15.5	15.28	0.03	0 mm	1604-1	1	left	1:1	0.087	1.052	0.092	
2412	1	IEEE 802.11b	DSSS	15.5	14.82	0.13	0 mm	1604-1	1	back	1:1	0.910	1.169	1.064	
5765	153	IEEE 802.11a	OFDM	7.5	6.96	0.08	0 mm	1604-4	6	back	1:1	0.213	1.132	0.241	
5785	157	IEEE 802.11a	OFDM	7.5	6.78	0.12	0 mm	1604-4	6	back	1:1	0.215	1.180	0.254	
5805	161	IEEE 802.11a	OFDM	7.5	6.90	0.03	0 mm	1604-4	6	back	1:1	0.236	1.148	0.271	A15
5765	153	IEEE 802.11a	OFDM	7.5	6.96	-0.12	0 mm	1604-4	6	bottom	1:1	0.074	1.132	0.084	
5765	153	IEEE 802.11a	OFDM	7.5	6.96	0.15	0 mm	1604-4	6	left	1:1	0.000	1.132	0.000	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Blue entries indicate variability measurements.

Table 10-9
NII Body SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
5180	36	IEEE 802.11a	OFDM	7.5	7.01	-0.02	0 mm	1604-4	6	back	1:1	0.824	1.119	0.922	
5220	44	IEEE 802.11a	OFDM	7.5	6.62	0.05	0 mm	1604-4	6	back	1:1	0.836	1.225	1.024	A14
5180	36	IEEE 802.11a	OFDM	7.5	7.01	-0.16	0 mm	1604-4	6	bottom	1:1	0.436	1.119	0.488	
5220	44	IEEE 802.11a	OFDM	7.5	6.62	-0.17	0 mm	1604-4	6	bottom	1:1	0.496	1.225	0.608	
5180	36	IEEE 802.11a	OFDM	7.5	7.01	0.20	0 mm	1604-4	6	left	1:1	0.007	1.119	0.008	
5220	44	IEEE 802.11a	OFDM	7.5	6.62	-0.13	0 mm	1604-4	6	back	1:1	0.805	1.225	0.986	
5260	52	IEEE 802.11a	OFDM	7.5	6.54	0.03	0 mm	1604-4	6	back	1:1	0.790	1.247	0.985	
5300	60	IEEE 802.11a	OFDM	7.5	6.42	-0.01	0 mm	1604-4	6	back	1:1	0.782	1.282	1.003	
5260	52	IEEE 802.11a	OFDM	7.5	6.54	-0.18	0 mm	1604-4	6	bottom	1:1	0.534	1.247	0.666	
5300	60	IEEE 802.11a	OFDM	7.5	6.42	-0.19	0 mm	1604-4	6	bottom	1:1	0.541	1.282	0.694	
5260	52	IEEE 802.11a	OFDM	7.5	6.54	0.00	0 mm	1604-4	6	left	1:1	0.001	1.247	0.001	
5540	108	IEEE 802.11a	OFDM	7.5	6.78	0.10	0 mm	1604-4	6	back	1:1	0.415	1.180	0.490	
5560	112	IEEE 802.11a	OFDM	7.5	6.69	0.18	0 mm	1604-4	6	back	1:1	0.306	1.205	0.369	
5660	132	IEEE 802.11a	OFDM	7.5	6.64	-0.15	0 mm	1604-4	6	back	1:1	0.239	1.219	0.291	
5540	108	IEEE 802.11a	OFDM	7.5	6.78	-0.12	0 mm	1604-4	6	bottom	1:1	0.252	1.180	0.297	
5560	112	IEEE 802.11a	OFDM	7.5	6.69	-0.13	0 mm	1604-4	6	bottom	1:1	0.159	1.205	0.192	
5660	132	IEEE 802.11a	OFDM	7.5	6.64	-0.13	0 mm	1604-4	6	bottom	1:1	0.134	1.219	0.163	
5540	108	IEEE 802.11a	OFDM	7.5	6.78	0.00	0 mm	1604-4	6	left	1:1	0.000	1.180	0.000	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Blue entries indicate variability measurements

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 29 of 53

Table 10-10
Bluetooth Body SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
2441	39	Bluetooth	FHSS	10.0	9.53	0.17	0 mm	1604-1	1	back	1:1	0.318	1.114	0.354	A13
2441	39	Bluetooth	FHSS	10.0	9.53	0.03	0 mm	1604-1	1	bottom	1:1	0.068	1.114	0.076	
2441	39	Bluetooth	FHSS	10.0	9.53	-0.15	0 mm	1604-1	1	left	1:1	0.030	1.114	0.033	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

10.3 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2003, FCC KDB Publication 616217 D04v01 and FCC KDB Publication 447498 D01v05.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v05.
6. Per FCC KDB 865664 D01 v01, variability SAR tests were performed when the measured SAR results for a frequency band were greater than 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 12 for variability analysis.
7. Per FCC KDB 616217 D04 Section 4.3, SAR tests are required for the back surface and edges of the tablet with the tablet touching the phantom. The SAR Exclusion Threshold in FCC KDB 447498 D01v05 was applied to determine SAR test exclusion for adjacent edge configurations. SAR tests were required for top and left edge for the main antenna and bottom and left edges for the BT/WLAN antenna.
8. Head SAR testing was required for this tablet because it has a speaker/ receiver and microphone positioning that allows for a held-to-ear configuration usage. This device uses a proximity sensor to reduce powers of voice/data modes in held-to-ear configurations. Therefore, all head SAR tests were performed at reduced power levels for GSM/UMTS.

GSM Test Notes:

1. Justification for reduced test configurations per KDB Publication 941225 D03v01: The source-based time-averaged output power was evaluated for all multi-slot operations. The multi-slot configuration with the highest frame averaged output power was evaluated for SAR. Additional 2 Tx GPRS slots configuration was tested for SAR since the frame averaged power with respect to the target powers was high.
2. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

FCC ID: A3LSMT311	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 30 of 53

UMTS Notes:

1. UMTS mode in Body SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v02. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

WLAN Notes:

1. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 2.4 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11b. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
2. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 5 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11a. Other IEEE 802.11 modes (including 802.11n 20 MHz and 40 MHz bandwidths) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
3. WIFI transmission was verified using an uncalibrated spectrum analyzer
4. If the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is >1.6 W/kg or the reported 1g averaged SAR is >0.8 W/kg, SAR testing on other default channels is required.
5. There is no proximity sensor controlled power reduction mechanism applied for WIFI/BT modes.

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet	Page 31 of 53	

11 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

11.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v05 are applicable to handsets with built-in unlicensed transmitters such as 802.11a/b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

11.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05 IV.C.1.iii, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D01v05 4.3.2 2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

Table 11-1
Estimated SAR for Bluetooth LE at Min. Separation Distances

Mode	Configuration	Frequency	Maximum Allowed Power	Separation Distance (Body)	Estimated SAR (Body)
		[MHz]	[dBm]	[mm]	[W/kg]
Bluetooth LE	Touching *	2441	6.50	5	0.167
Bluetooth LE	Back side	2441	6.50	10	0.083
Bluetooth LE	Bottom edge	2441	6.50	7	0.119

Note:

1. For configurations excluded per 447498 D01v05, an estimated SAR of 0.4 W/kg was used to determine simultaneous transmission SAR exclusion since the test separation distance was >50 mm.
2. (*) – Per FCC KDB Publication 447498, when the test separation distance is < 5 mm, a distance of 5 mm is applied to determine estimated SAR.
3. Bluetooth or Bluetooth LE modes is not applicable in held to ear operations.

FCC ID: A3LSMT311	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 32 of 53

11.3 Head SAR Simultaneous Transmission Analysis

Table 11-2
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)

Simult Tx	Configuration	GSM 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.325	0.002	0.327	Head SAR	Right Cheek	0.333	0.002	0.335
	Right Tilt	0.243	0.001	0.244		Right Tilt	0.266	0.001	0.267
	Left Cheek	0.128	0.002	0.130		Left Cheek	0.172	0.002	0.174
	Left Tilt	0.123	0.001	0.124		Left Tilt	0.175	0.001	0.176
Simult Tx	Configuration	GSM 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.336	0.002	0.338	Head SAR	Right Cheek	0.410	0.002	0.412
	Right Tilt	0.255	0.001	0.256		Right Tilt	0.355	0.001	0.356
	Left Cheek	0.125	0.002	0.127		Left Cheek	0.188	0.002	0.190
	Left Tilt	0.110	0.001	0.111		Left Tilt	0.161	0.001	0.162

Table 11-3
Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)

Simult Tx	Configuration	GSM 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.325	0.005	0.330	Head SAR	Right Cheek	0.333	0.005	0.338
	Right Tilt	0.243	0.000	0.243		Right Tilt	0.266	0.000	0.266
	Left Cheek	0.128	0.001	0.129		Left Cheek	0.172	0.001	0.173
	Left Tilt	0.123	0.002	0.125		Left Tilt	0.175	0.002	0.177
Simult Tx	Configuration	GSM 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.336	0.005	0.341	Head SAR	Right Cheek	0.410	0.005	0.415
	Right Tilt	0.255	0.000	0.255		Right Tilt	0.355	0.000	0.355
	Left Cheek	0.125	0.001	0.126		Left Cheek	0.188	0.001	0.189
	Left Tilt	0.110	0.002	0.112		Left Tilt	0.161	0.002	0.163

11.4 Body Simultaneous Transmission Analysis

Table 11-4
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body at 0 mm)

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.990	1.094	See Note 1	0.02	Body SAR	Back	0.459	1.094	1.553	N/A
	Top	0.497	0.400	0.897	N/A		Top	0.241	0.400	0.641	N/A
	Bottom	0.400	0.261	0.661	N/A		Bottom	0.400	0.261	0.661	N/A
	Right	0.400	0.400	0.800	N/A		Right	0.400	0.400	0.800	N/A
	Left	0.392	0.092	0.484	N/A		Left	0.229	0.092	0.321	N/A
Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.720	1.094	See Note 1	0.01	Body SAR	Back	1.020	1.094	See Note 1	0.02
	Top	0.322	0.400	0.722	N/A		Top	0.381	0.400	0.781	N/A
	Bottom	0.400	0.261	0.661	N/A		Bottom	0.400	0.261	0.661	N/A
	Right	0.400	0.400	0.800	N/A		Right	0.400	0.400	0.800	N/A
	Left	0.543	0.092	0.635	N/A		Left	0.624	0.092	0.716	N/A

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 33 of 53

Table 11-5
Simultaneous Transmission Scenario with 5 GHz WLAN (Body at 0 mm)

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.990	1.024	See Note 1	0.02	Body SAR	Back	0.459	1.024	1.483	N/A
	Top	0.497	0.400	0.897	N/A		Top	0.241	0.400	0.641	N/A
	Bottom	0.400	0.694	1.094	N/A		Bottom	0.400	0.694	1.094	N/A
	Right	0.400	0.400	0.800	N/A		Right	0.400	0.400	0.800	N/A
	Left	0.392	0.008	0.400	N/A		Left	0.229	0.008	0.237	N/A
Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.720	1.024	See Note 1	0.01	Body SAR	Back	1.020	1.024	See Note 1	0.02
	Top	0.322	0.400	0.722	N/A		Top	0.381	0.400	0.781	N/A
	Bottom	0.400	0.694	1.094	N/A		Bottom	0.400	0.694	1.094	N/A
	Right	0.400	0.400	0.800	N/A		Right	0.400	0.400	0.800	N/A
	Left	0.543	0.008	0.551	N/A		Left	0.624	0.008	0.632	N/A

Table 11-6
Simultaneous Transmission Scenario with Bluetooth (Body at 0 mm)

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 850 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.990	0.354	1.344	N/A	Body SAR	Back	0.459	0.354	0.813	N/A
	Top	0.497	0.400	0.897	N/A		Top	0.241	0.400	0.641	N/A
	Bottom	0.400	0.167	0.567	N/A		Bottom	0.400	0.167	0.567	N/A
	Right	0.400	0.400	0.800	N/A		Right	0.400	0.400	0.800	N/A
	Left	0.392	0.167	0.559	N/A		Left	0.229	0.167	0.396	N/A
Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Body SAR	Back	0.720	0.354	1.074	N/A	Body SAR	Back	1.020	0.354	1.374	N/A
	Top	0.322	0.400	0.722	N/A		Top	0.381	0.400	0.781	N/A
	Bottom	0.400	0.167	0.567	N/A		Bottom	0.400	0.167	0.567	N/A
	Right	0.400	0.400	0.800	N/A		Right	0.400	0.400	0.800	N/A
	Left	0.543	0.167	0.710	N/A		Left	0.624	0.167	0.791	N/A

Estimated Bluetooth LE SAR was used to evaluate the bottom and left edge simultaneous sums because estimated Bluetooth LE SAR was more conservative than the measured Bluetooth SAR. See Table 11-1

Table 11-7
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body at 10 mm)

Configuration	Mode	2G/3G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Back Side	GSM 850	0.306	<1.094	<1.400	N/A
Back Side	UMTS 850	0.351	<1.094	<1.445	N/A
Back Side	GSM 1900	0.626	<1.094	See Note 1	<0.01
Back Side	UMTS 1900	0.660	<1.094	See Note 1	<0.01

Table 11-8
Simultaneous Transmission Scenario with 5 GHz WLAN (Body at 10 mm)

Configuration	Mode	2G/3G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Back Side	GSM 850	0.306	<1.024	<1.33	N/A
Back Side	UMTS 850	0.351	<1.024	<1.375	N/A
Back Side	GSM 1900	0.626	<1.024	See Note 1	<0.01
Back Side	UMTS 1900	0.660	<1.024	See Note 1	<0.01

Table 11-9
Simultaneous Transmission Scenario with 2.4 GHz Bluetooth (Body at 10 mm)

Configuration	Mode	2G/3G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Back Side	GSM 850	0.306	<0.354	<0.66	N/A
Back Side	UMTS 850	0.351	<0.354	<0.705	N/A
Back Side	GSM 1900	0.626	<0.354	<0.98	N/A
Back Side	UMTS 1900	0.660	<0.354	<1.014	N/A

FCC ID: A3LSMT311	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet
Page 34 of 53		

Table 11-10
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body at 7 mm)

Configuration	Mode	2G/3G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Top Edge	GSM 850	0.353	0.400	0.753	N/A
Top Edge	UMTS 850	0.213	0.400	0.613	N/A
Top Edge	GSM 1900	0.722	0.400	1.122	N/A
Top Edge	UMTS 1900	0.720	0.400	1.120	N/A

Per 447498 D01v05, an estimated SAR of 0.4 W/kg was used for 2.4 GHz WLAN to determine simultaneous transmission SAR in the Top Edge at 7mm configuration.

Table 11-11
Simultaneous Transmission Scenario with 5 GHz WLAN (Body at 7 mm)

Configuration	Mode	2G/3G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Top Edge	GSM 850	0.353	0.400	0.753	N/A
Top Edge	UMTS 850	0.213	0.400	0.613	N/A
Top Edge	GSM 1900	0.722	0.400	1.122	N/A
Top Edge	UMTS 1900	0.720	0.400	1.120	N/A

Per 447498 D01v05, an estimated SAR of 0.4 W/kg was used for 5 GHz WLAN to determine simultaneous transmission SAR in the Top Edge at 7mm configuration.

Table 11-12
Simultaneous Transmission Scenario with 2.4 GHz Bluetooth (Body at 7 mm)

Configuration	Mode	2G/3G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Top Edge	GSM 850	0.353	0.400	0.753	N/A
Top Edge	UMTS 850	0.213	0.400	0.613	N/A
Top Edge	GSM 1900	0.722	0.400	1.122	N/A
Top Edge	UMTS 1900	0.720	0.400	1.120	N/A

Per 447498 D01v05, an estimated SAR of 0.4 W/kg was used for Bluetooth to determine simultaneous transmission SAR in the Top Edge at 7mm configuration.

Note:

1. No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not higher than 0.04 per FCC KDB 447498 D01v05. See Section 11.5 for detailed SPLS ratio analysis.
2. For configurations excluded per 447498 D01v05, an estimated SAR of 0.4 W/kg was used to determine simultaneous transmission SAR exclusion since the test separation distance was >50 mm.
3. For SAR summations for body 10 mm, WLAN SAR values for 0.0 cm were used since the 0.0 cm test distance for WLAN was more conservative. "<" denotes that the 0.0 cm WLAN SAR values were used for summation purposes.
4. For SAR summations for body 7 mm, WLAN SAR values for 0.0 cm were used since the 0.0 cm test distance for WLAN was more conservative. "<" denotes that the 0.0 cm WLAN SAR values were used for summation purposes.
5. Per FCC KDB 616217 D04 4.3, when voice mode is limited to speaker mode or headset operations only, additional SAR testing for tablet voice use is not required. Therefore voice standalone and simultaneous combinations with Bluetooth are not evaluated for body configurations.
6. The worst case 5 GHz WLAN reported SAR for each configuration was used for SAR summation, regardless of whether the WLAN channel has WIFI Direct capability. Therefore, the summations above represent the absolute worst cases for simultaneous transmission with 5 GHz WLAN.

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 35 of 53

11.5 SPLSR Evaluation and Analysis

Per FCC KDB Publication 447498 D01v05, when the sum of the standalone transmitters is more than 1.6 W/kg, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio (shown below) for each pair of antennas is ≤ 0.04 , simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formula.

$$\text{Distance}_{\text{Tx1} - \text{Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

$$\text{SPLS Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 36 of 53

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back side configuration at a separation distance of 0 mm with GPRS 850 antenna operating at limited output power with 2.4 GHz WIFI.

Table 11-13
Peak SAR Locations for Body Back Side at 0 mm GPRS 850 and 2.4 GHz WLAN

Mode/Band	x (mm)	y (mm)
GPRS 850	5.00	90.00
802.11 b	19.00	-90.50

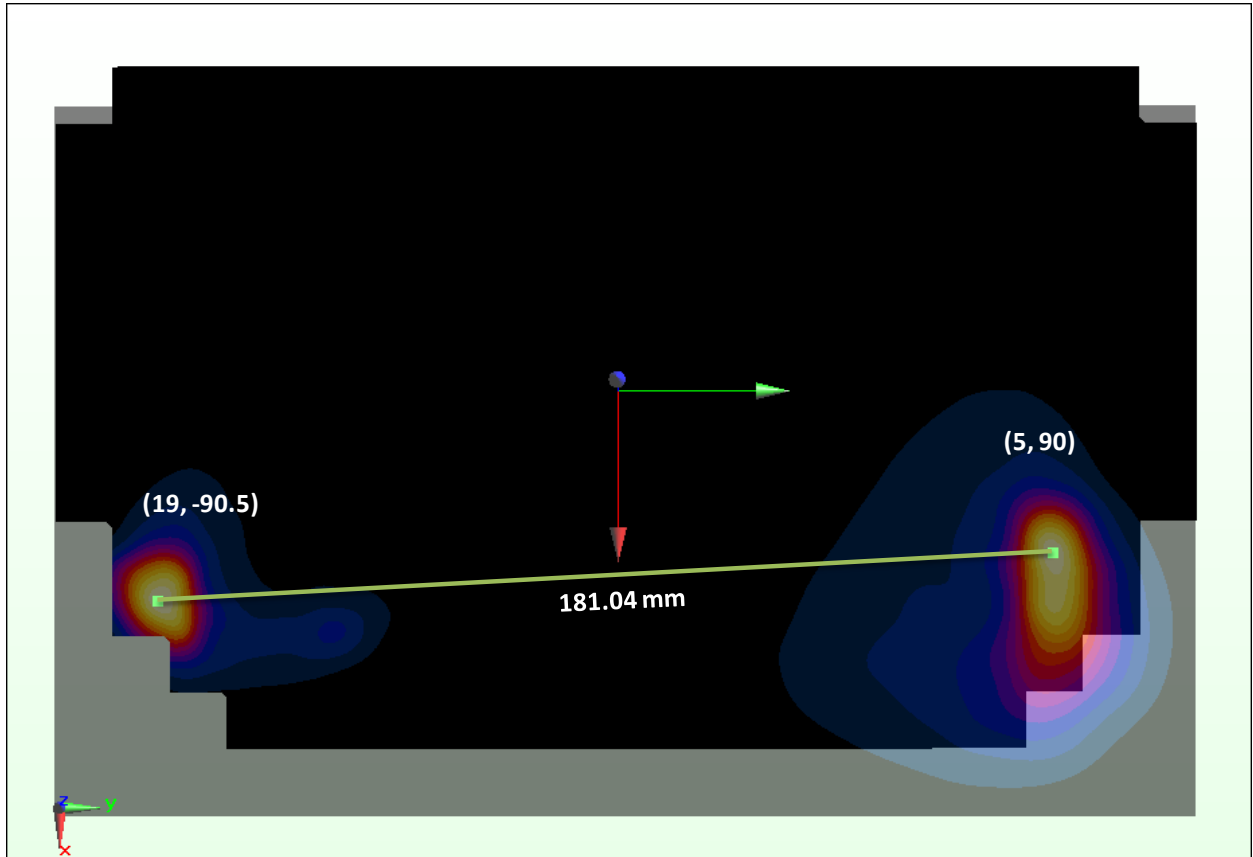


Figure 11-1
Peak SAR Locations of 2.4 GHz WLAN and GPRS 850

Table 11-14
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
GPRS 850	802.11 b	0.99	1.094	2.084	181.04	0.02

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back side configuration at a separation distance of 0 mm with GPRS 1900 antenna operating at limited output power with 2.4 GHz WIFI.

Table 11-15
Peak SAR Locations for Body Back Side at 0 mm GPRS 1900 and 2.4 GHz WLAN

Mode/Band	x (mm)	y (mm)
GPRS 1900	20.50	97.00
802.11 b	19.00	-90.50

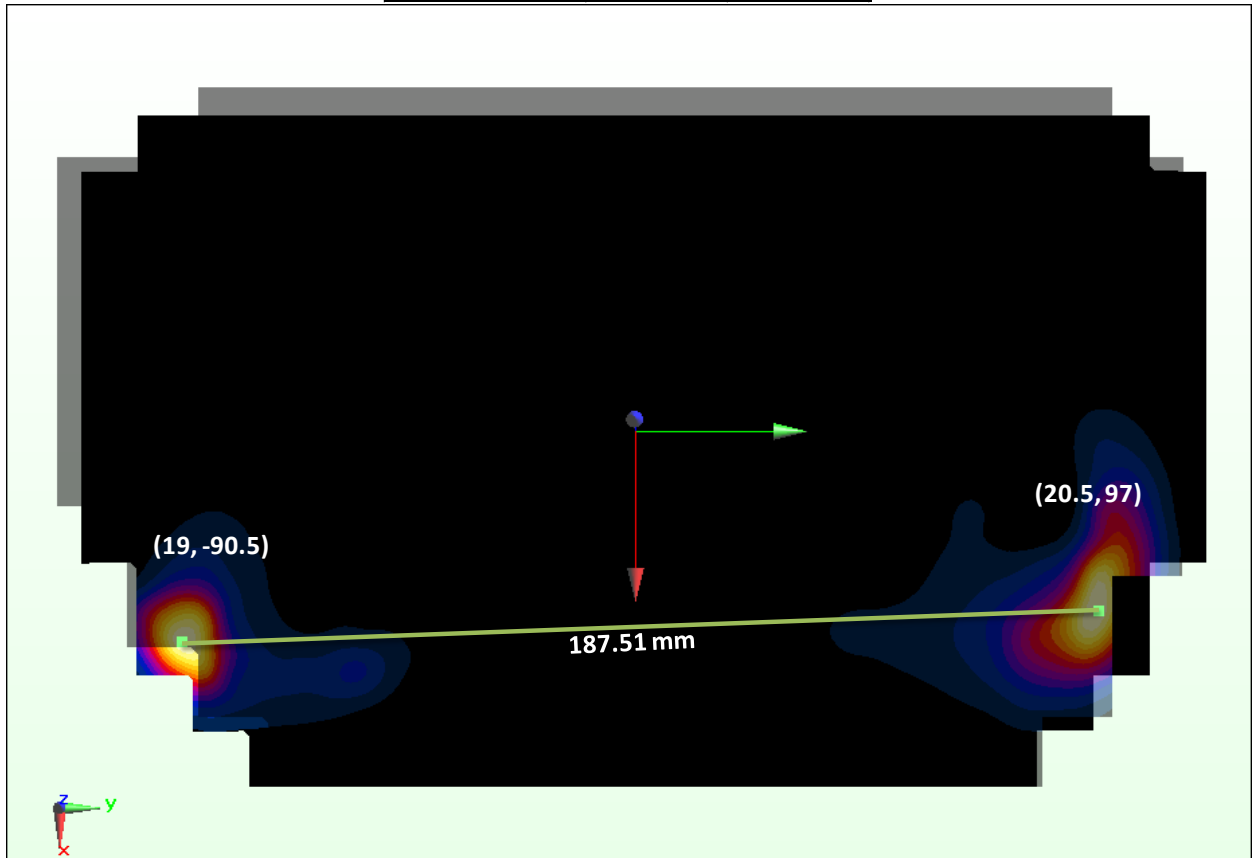


Figure 11-2
Peak SAR Locations of 2.4 GHz WLAN and GPRS 1900

Table 11-16
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
GPRS 1900	802.11 b	0.72	1.094	1.814	187.51	0.01

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back side configuration at a separation distance of 0 mm with UMTS 1900 antenna operating at limited output power with 2.4 GHz WIFI.

Table 11-17
Peak SAR Locations for Body Back Side at 0 mm UMTS 1900 and 2.4 GHz WLAN

Mode/Band	x (mm)	y (mm)
UMTS 1900	23.50	93.00
802.11 b	19.00	-90.50

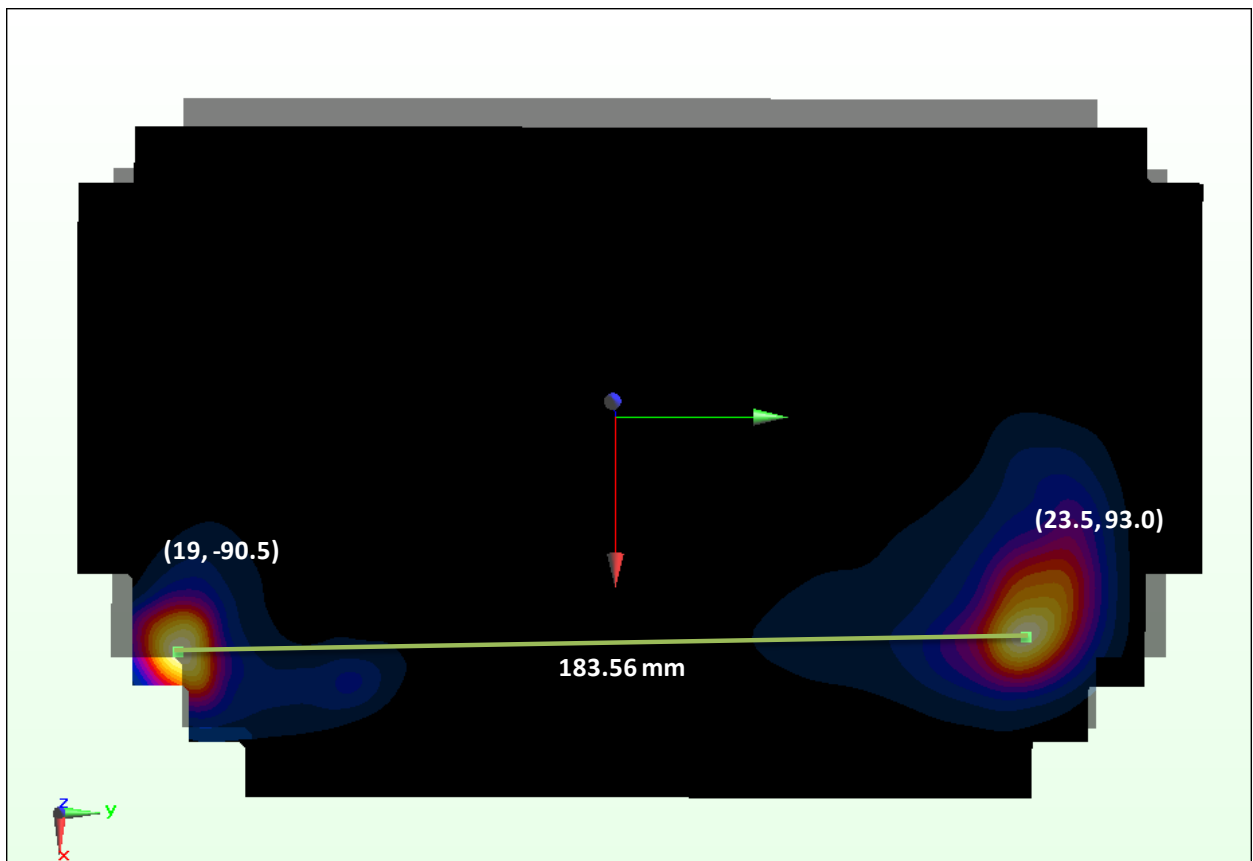


Figure 11-3
Peak SAR Locations of 2.4 GHz WLAN and UMTS 1900

Table 11-18
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
UMTS 1900	802.11 b	1.02	1.094	2.114	183.56	0.02

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back side configuration at a separation distance of 10 mm with UMTS 1900 antenna operating at maximum output power with 2.4 GHz WIFI.

Table 11-19
Peak SAR Locations for Body Back Side at 10 mm UMTS 1900 and 2.4 GHz WLAN

Mode/Band	x (mm)	y (mm)
UMTS 1900	13.00	100.00
802.11 b	19.00	-90.50

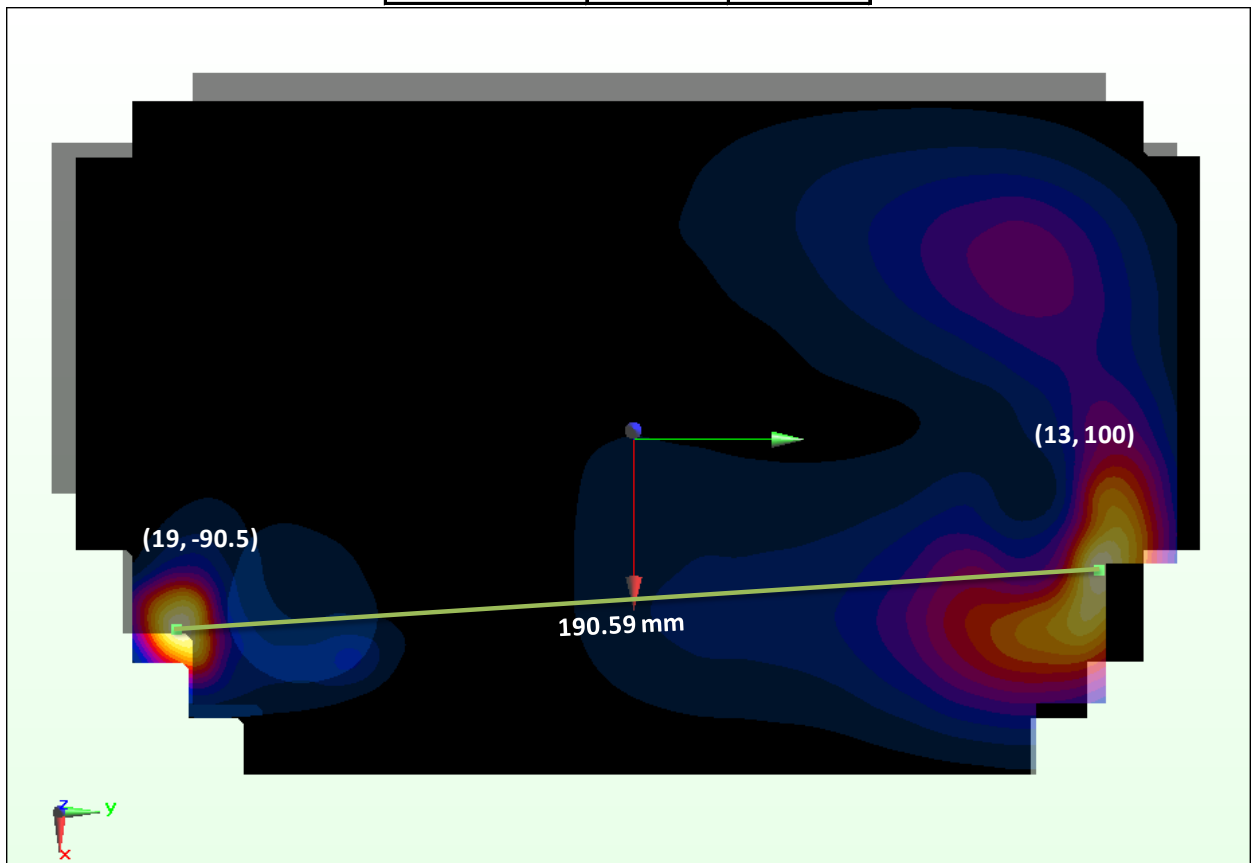


Figure 11-4
Peak SAR Locations of 2.4 GHz WLAN and UMTS 1900

Table 11-20
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
UMTS 1900	802.11 b	0.66	<1.094	<1.754	190.59	<0.01

FCC ID: A3LSMT311		SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 40 of 53	

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back side configuration at a separation distance of 10 mm with GPRS 1900 antenna operating at maximum output power with 2.4 GHz WIFI.

Table 11-21
Peak SAR Locations for Body Back Side at 10 mm GPRS 1900 and 2.4 GHz WLAN

Mode/Band	x (mm)	y (mm)
GPRS 1900	14.50	93.00
802.11 b	19.00	-90.50

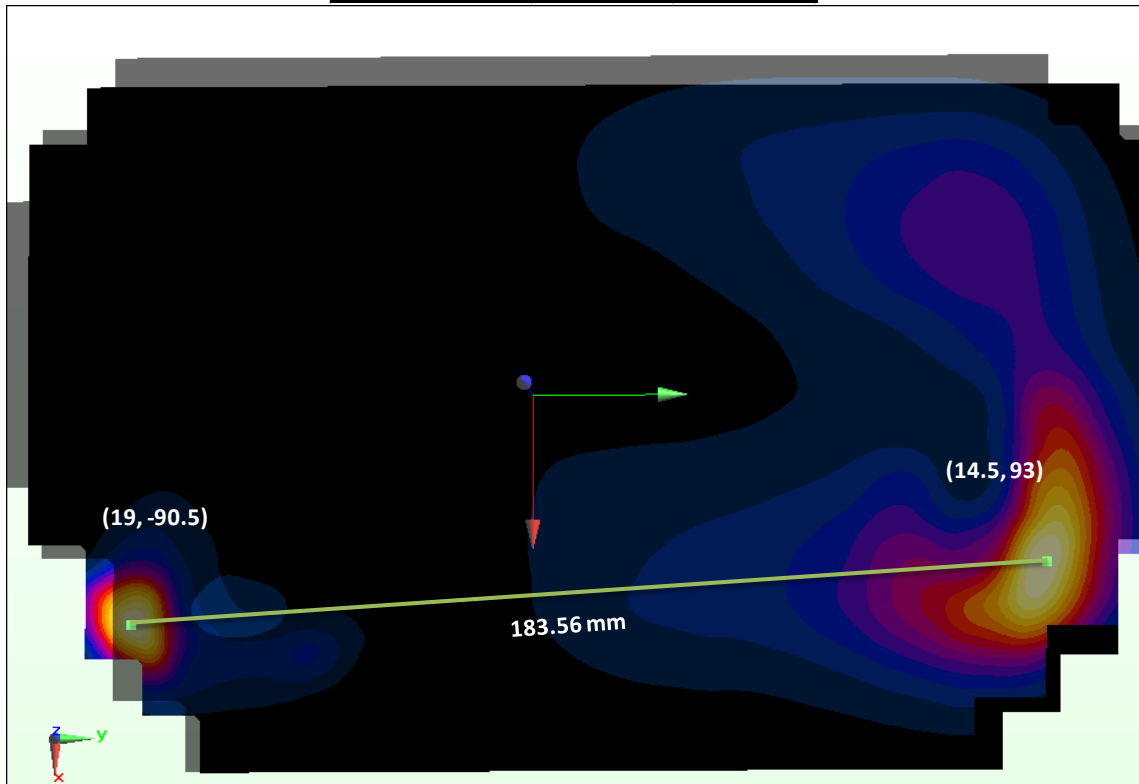


Figure 11-5
Peak SAR Locations of 2.4 GHz WLAN and GPRS 1900

Table 11-22
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
GPRS 1900	802.11 b	0.626	<1.094	<1.72	183.56	<0.01

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back side configuration at a separation distance of 0 mm with GPRS 850 antenna operating at limited output power with 5 GHz WIFI.

Table 11-23
Peak SAR Locations for Body Back Side at 0 mm GPRS 850 and 5 GHz WLAN

Mode/Band	x (mm)	y (mm)
GPRS 850	5.00	90.00
802.11a	19.00	-98.99

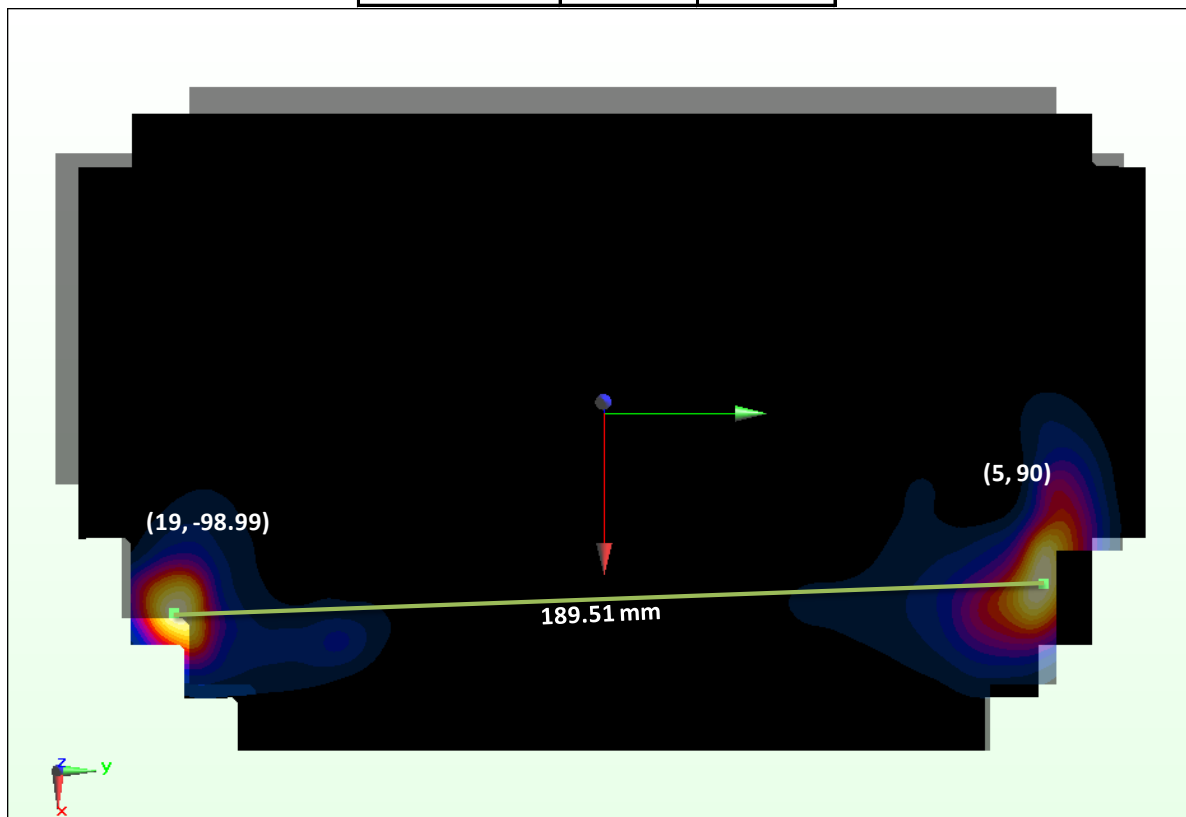


Figure 11-6
Peak SAR Locations of 5 GHz WLAN and GPRS 850

Table 11-24
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
GPRS 850	802.11a	0.99	1.024	2.014	189.51	0.02

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back side configuration at a separation distance of 0 mm with GPRS 1900 antenna operating at limited output power with 5 GHz WIFI.

Table 11-25
Peak SAR Locations for Body Back Side at 0 mm GPRS 1900 and 5 GHz WLAN

Mode/Band	x (mm)	y (mm)
GPRS 1900	20.50	97.00
802.11a	19.00	-98.99

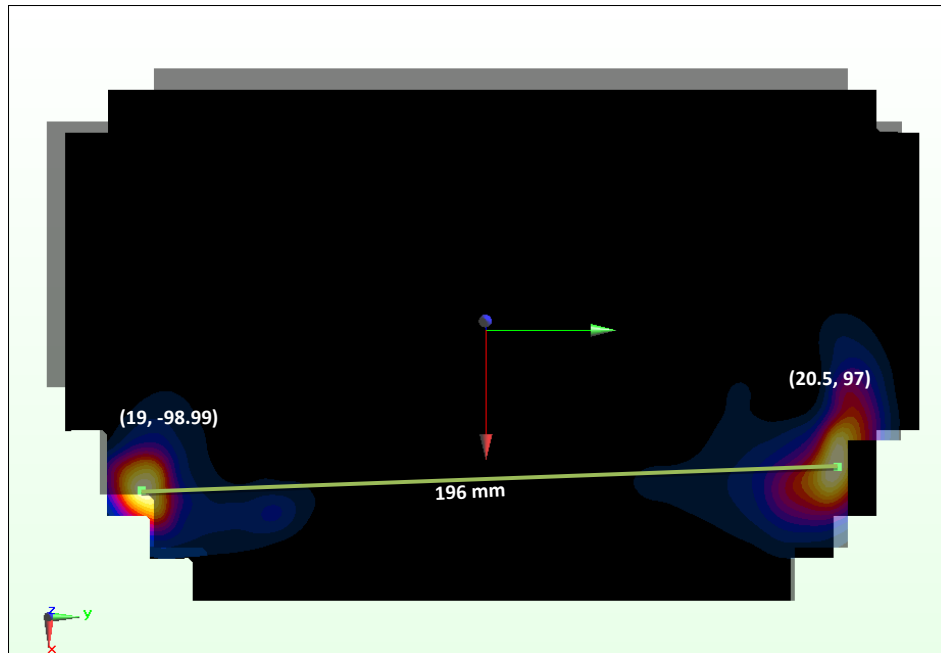


Figure 11-7
Peak SAR Locations of 5 GHz WLAN and GPRS 1900

Table 11-26
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
GPRS 1900	802.11 a	0.72	1.024	1.744	196	0.01

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back side configuration at a separation distance of 0 mm with UMTS 1900 antenna operating at limited output power with 5 GHz WIFI.

Table 11-27
Peak SAR Locations for Body Back Side at 0 mm UMTS 1900 and 5 GHz WLAN

Mode/Band	x (mm)	y (mm)
UMTS 1900	23.50	93.00
802.11 a	19.00	-98.99

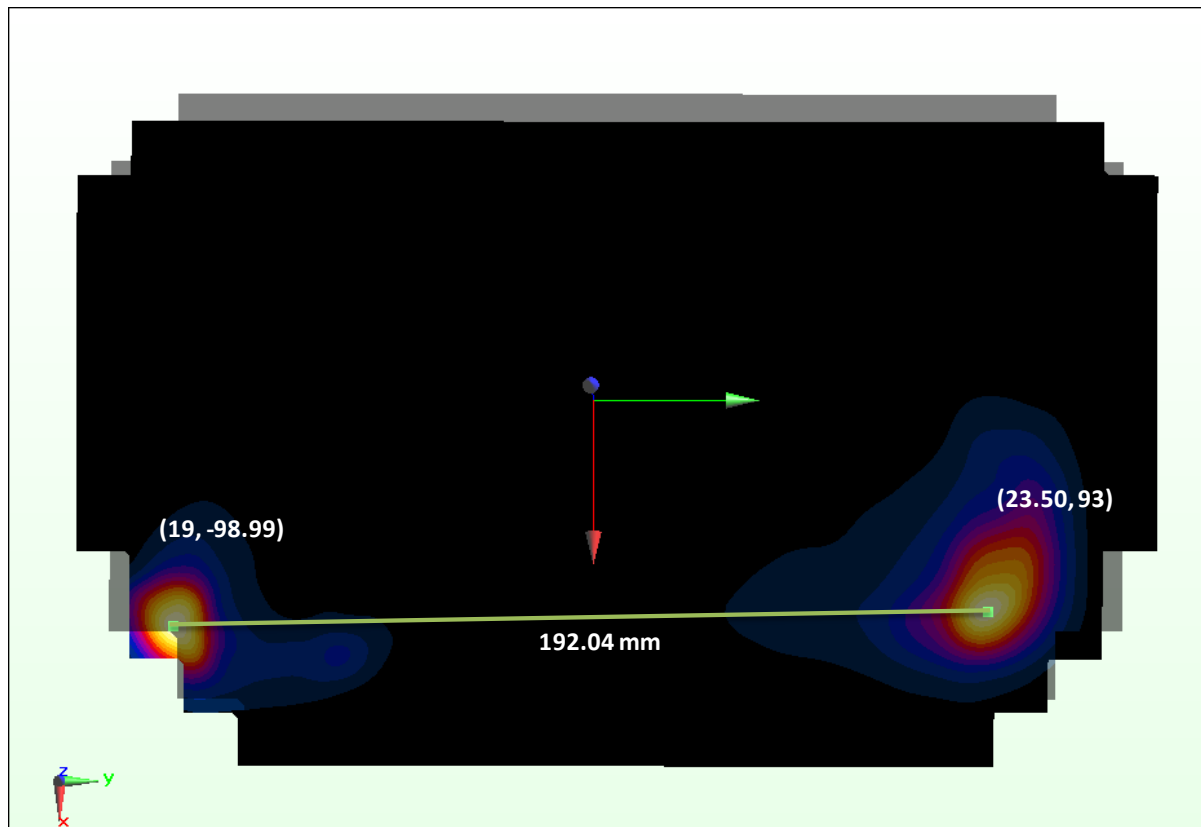


Figure 11-8
Peak SAR Locations of 5 GHz WLAN and UMTS 1900

Table 11-28
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
UMTS 1900	802.11 a	1.02	1.024	2.044	192.04	0.02

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back side configuration at a separation distance of 10 mm with UMTS 1900 antenna operating at maximum output power with 5GHz WIFI.

Table 11-29
Peak SAR Locations for Body Back Side at 10 mm UMTS 1900 and 5 GHz WLAN

Mode/Band	x (mm)	y (mm)
UMTS 1900	13.00	100.00
802.11 a	19.00	-98.99

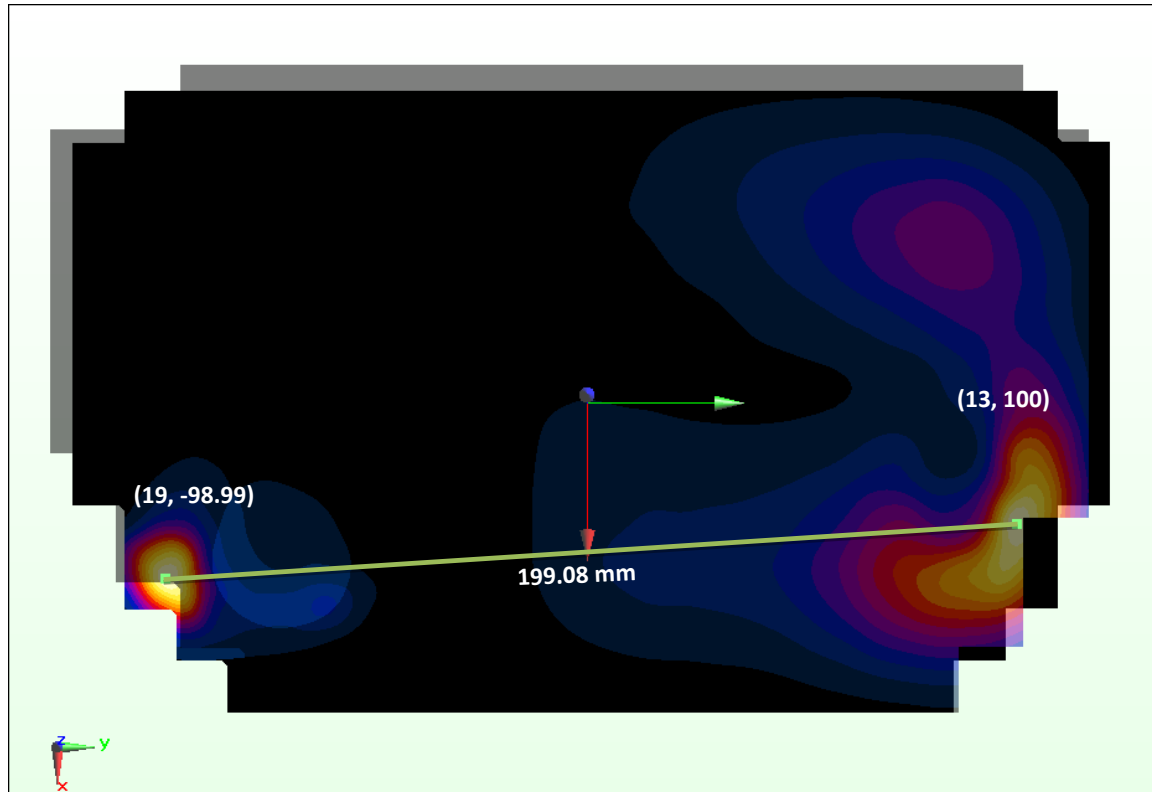


Figure 11-9
Peak SAR Locations of 5 GHz WLAN and UMTS 1900

Table 11-30
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
UMTS 1900	802.11 a	0.66	<1.024	<1.684	199.08	<0.01

The sum of the standalone SAR values was above 1.6 W/kg for the Body Back side configuration at a separation distance of 10 mm with GPRS 1900 antenna operating at maximum output power with 5 GHz WIFI.

Table 11-31
Peak SAR Locations for Body Back Side at 10 mm GPRS 1900 and 5 GHz WLAN

Mode/Band	x (mm)	y (mm)
GPRS 1900	14.50	93.00
802.11 a	19.00	-98.99

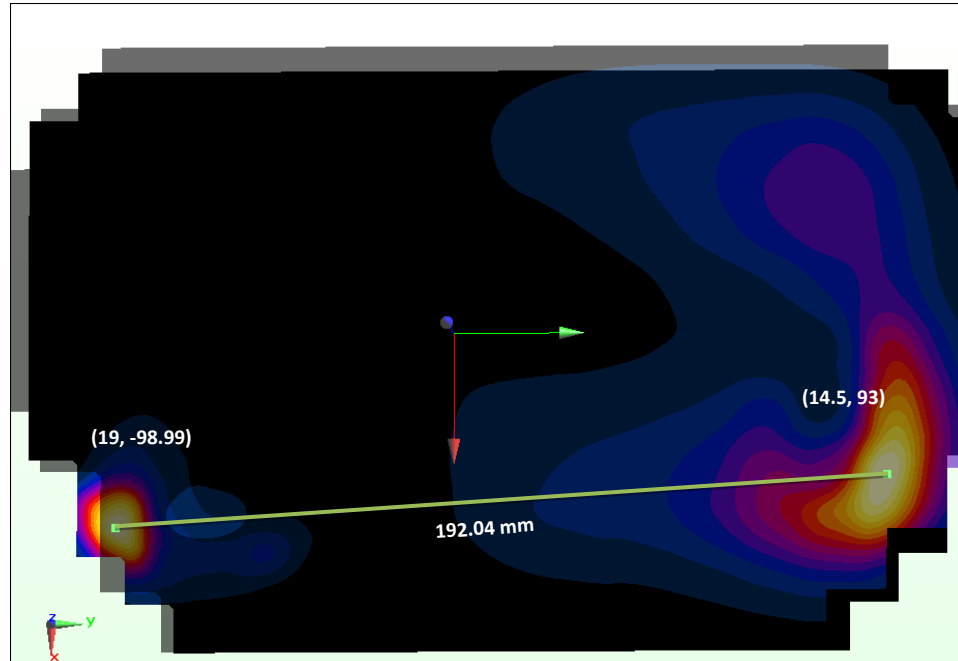


Figure 11-10
Peak SAR Locations of 5 GHz WLAN and GPRS 1900

Table 11-32
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 1g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
GPRS 1900	802.11 a	0.626	<1.024	<1.65	192.04	<0.01

11.6 Simultaneous Transmission Conclusion

Based on the simultaneous transmission analysis guidance described in KDB Publication 865664 D01 and the April 2012 TCB/FCC Workshop, the above simultaneous transmission SAR analyses indicate that the device operating in any of the simultaneous transmission scenarios will not exceed the SAR limit.

FCC ID: A3LSMT311		SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet			Page 46 of 53

12 SAR MEASUREMENT VARIABILITY

12.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Table 12-1
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS															
Band	FREQUENCY		Mode	Service	# of Time Slots	Data Rate (Mbps)	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.							(W/kg)	(W/kg)		(W/kg)		(W/kg)	
835	824.20	128	GSM 850	GPRS	3	N/A	back	0 mm	0.916	0.870	1.05	N/A	N/A	N/A	N/A
1900	1880.00	9400	UMTS 1900	RMC	0	N/A	back	0 mm	0.826	0.935	1.13	N/A	N/A	N/A	N/A
2450	2412.00	1	IEEE 802.11b	DSSS	N/A	1	back	0 mm	0.936	0.910	1.03	N/A	N/A	N/A	N/A
5300	5220.00	44	IEEE 802.11a	OFDM	N/A	6	back	0 mm	0.836	0.805	1.04	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram						

12.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01, the extended measurement uncertainty analysis per IEEE 1528-2003 was not required.

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 47 of 53

13 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	85047A	S-Parameter Test Set	N/A	N/A	N/A	2904A00579
Agilent	8753E	(30kHz-6GHz) Network Analyzer	4/16/2013	Annual	4/16/2014	JP38020182
Agilent	MA24106A	USB Power Sensor	12/7/2012	Annual	12/7/2013	1244515
Agilent	MA24106A	USB Power Sensor	12/7/2012	Annual	12/7/2013	1244512
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
Agilent	N4010A	Wireless Connectivity Test Set	N/A	NA	N/A	GB44450273
Amplifier Research	551G4	5W, 800MHz-4.2GHz	CBT	N/A	CBT	21910
Anritsu	ML2438A	Power Meter	2/14/2013	Annual	2/14/2014	1190013
Anritsu	ML2438A	Power Meter	2/14/2013	Annual	2/14/2014	98150041
Anritsu	MA2481A	Power Sensor	2/14/2013	Annual	2/14/2014	5318
Anritsu	MA2481A	Power Sensor	2/14/2013	Annual	2/14/2014	5821
Anritsu	MA2411B	Pulse Power Sensor	12/4/2012	Annual	12/4/2013	1207364
Anritsu	MA2411B	Pulse Sensor	9/19/2012	Annual	9/19/2013	1027293
Anritsu	MT8820C	Radio Communication Tester	11/6/2012	Annual	11/6/2013	6200901190
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
Control Company	4353	Long Stem Thermometer	9/25/2012	Biennial	9/25/2014	122539615
Control Company	61220-416	Long-Stem Thermometer	7/1/2011	Biennial	7/1/2013	111642834
Control Company	36934-158	Wall-Mounted Thermometer	1/4/2012	Biennial	1/4/2014	122014497
Fisher Scientific	15-078J	Long Stem Thermometer	10/30/2012	Biennial	10/30/2014	122626059
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2208-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Rohde & Schwarz	NRVD	Dual Channel Power Meter	10/12/2012	Biennial	10/12/2014	101695
Rohde & Schwarz	SME06	Signal Generator	10/11/2012	Annual	10/11/2013	832026
Seekonk	NC-100	Torque Wrench (8" lb)	11/29/2011	Triennial	11/29/2014	21053
SPEAG	D1900V2	1900 MHz SAR Dipole	7/20/2012	Annual	7/20/2013	5d080
SPEAG	D1900V2	1900 MHz SAR Dipole	2/6/2013	Annual	2/6/2014	5d148
SPEAG	D2450V2	2450 MHz SAR Dipole	8/23/2012	Annual	8/23/2013	719
SPEAG	D2450V2	2450 MHz SAR Dipole	1/8/2013	Annual	1/8/2014	797
SPEAG	D5GHzV2	5 GHz SAR Dipole	1/11/2013	Annual	1/11/2014	1057
SPEAG	D5GHzV2	5 GHz SAR Dipole	2/14/2013	Annual	2/14/2014	1120
SPEAG	D835V2	835 MHz SAR Dipole	8/23/2012	Annual	8/23/2013	4d026
SPEAG	D835V2	835 MHz SAR Dipole	1/7/2013	Annual	1/7/2014	4d132
SPEAG	DAE4	Dasy Data Acquisition Electronics	5/15/2012	Annual	5/15/2013	859
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/24/2012	Annual	8/24/2013	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/19/2012	Annual	9/19/2013	1323
SPEAG	DAE4	Dasy Data Acquisition Electronics	11/13/2012	Annual	11/13/2013	1333
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/17/2013	Annual	1/17/2014	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/6/2013	Annual	2/6/2014	649
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/8/2013	Annual	3/8/2014	1334
SPEAG	DAK-3.5	Dielectric Assessment Kit	6/19/2012	Annual	6/19/2013	1070
SPEAG	DAK-3.5	Dielectric Assessment Kit	12/11/2012	Annual	12/11/2013	1091
SPEAG	ES3DV2	SAR Probe	8/28/2012	Annual	8/28/2013	3022
SPEAG	ES3DV3	SAR Probe	9/20/2012	Annual	9/20/2013	3288
SPEAG	ES3DV3	SAR Probe	11/15/2012	Annual	11/15/2013	3287
SPEAG	EX3DV4	SAR Probe	1/17/2013	Annual	1/17/2014	3589
SPEAG	ES3DV3	SAR Probe	2/11/2013	Annual	2/11/2014	3258
SPEAG	EX3DV4	SAR Probe	2/27/2013	Annual	2/27/2014	3920
SPEAG	ES3DV3	SAR Probe	3/15/2013	Annual	3/15/2014	3209
VWR	23226-658	Long Stem Thermometer	7/11/2012	Biennial	7/11/2014	122389334
VWR	23226-658	Long Stem Thermometer	7/11/2012	Biennial	7/11/2014	122389330
VWR	62344-925	Mini-Thermometer	10/24/2011	Biennial	10/24/2013	111886441
VWR	36934-158	Wall-Mounted Thermometer	9/30/2011	Biennial	9/30/2013	111859323

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

Note: All equipment was calibrated for the time it was used in testing.

FCC ID: A3LSMT311	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 48 of 53

14 MEASUREMENT UNCERTAINTIES

Applicable for frequencies less than 3000 MHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.0	N	1	1.0	1.0	6.0	6.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)							RSS	12.1	11.7
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.2	23.5
									299

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 49 of 53

Applicable for frequencies up to 6 GHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)							RSS	12.4	12.0
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.7	24.0

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 50 of 53

15 CONCLUSION

15.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 51 of 53

16 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, June 2001.
- [6] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [7] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [8] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [9] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [10] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [11] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [12] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [13] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [14] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [15] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [16] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [17] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 52 of 53

- [18] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [19] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [20] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [21] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [22] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [23] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [24] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [25] FCC Public Notice DA-02-1438. Office of Engineering and Technology Announces a Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65, June 19, 2002
- [26] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [27] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v01r02
- [28] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D02-D04
- [29] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [30] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [31] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [32] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [33] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.



FCC ID: A3LSMT311		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1304050595-R1.A3L	Test Dates: 04/15/13 - 06/03/13	DUT Type: Portable Tablet		Page 53 of 53

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT311; Type: Portable Tablet; Serial: 1604-2

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 41.271$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-16-2013; Ambient Temp: 23.5°C; Tissue Temp: 22.7°C

Probe: ES3DV2 - SN3022; ConvF(6.03, 6.03, 6.03); Calibrated: 8/28/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.9 (7117)

Mode: GSM 850, Right Head, Cheek, Mid.ch


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.667 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.593 W/kg

SAR(1 g) = 0.312 W/kg

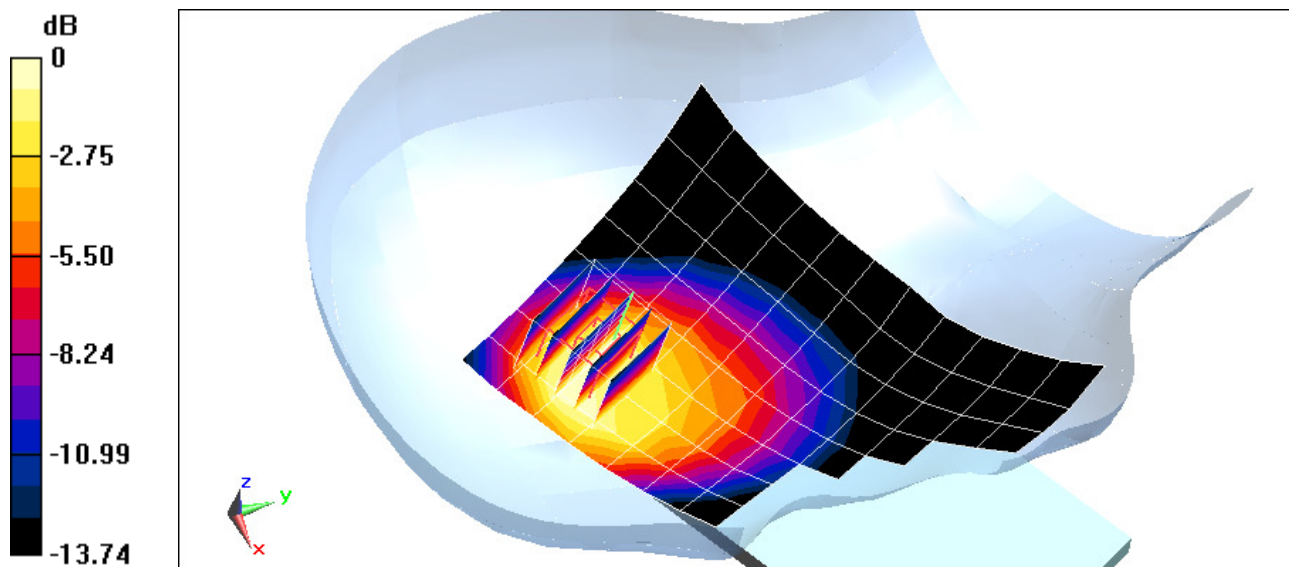

0 dB = 0.343 W/kg = -4.65 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT311; Type: Portable Tablet; 1604-2

Communication System: UMTS850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 41.271$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-16-2013; Ambient Temp: 23.5°C; Tissue Temp: 22.7°C

Probe: ES3DV2 - SN3022; ConvF(6.03, 6.03, 6.03); Calibrated: 8/28/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.9 (7117)

Mode: UMTS 850, Right Head, Cheek, Mid.ch


Area Scan (9x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.970 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.613 W/kg

SAR(1 g) = 0.322 W/kg.

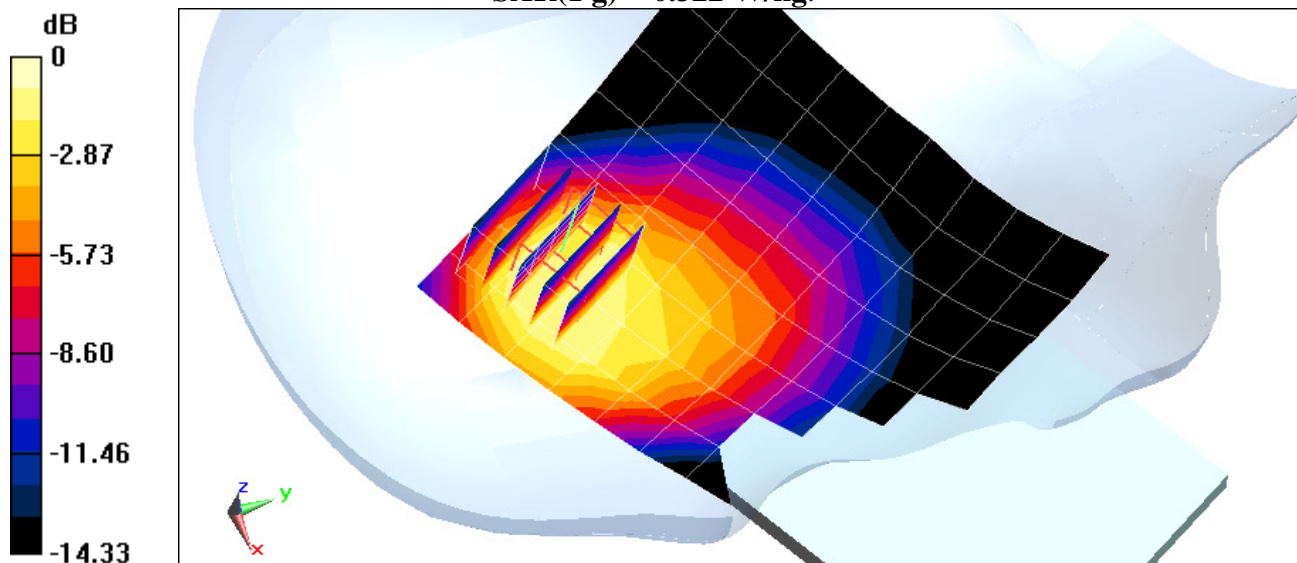

0 dB = 0.361 W/kg = -4.42 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT311; Type: Portable Tablet; Serial: 1604-1

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.433 \text{ S/m}$; $\epsilon_r = 40.037$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-15-2013; Ambient Temp: 22.0°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3288; ConvF(5.28, 5.28, 5.28); Calibrated: 9/20/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/19/2012

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Mode: GSM 1900, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.588 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.593 W/kg

SAR(1 g) = 0.312 W/kg

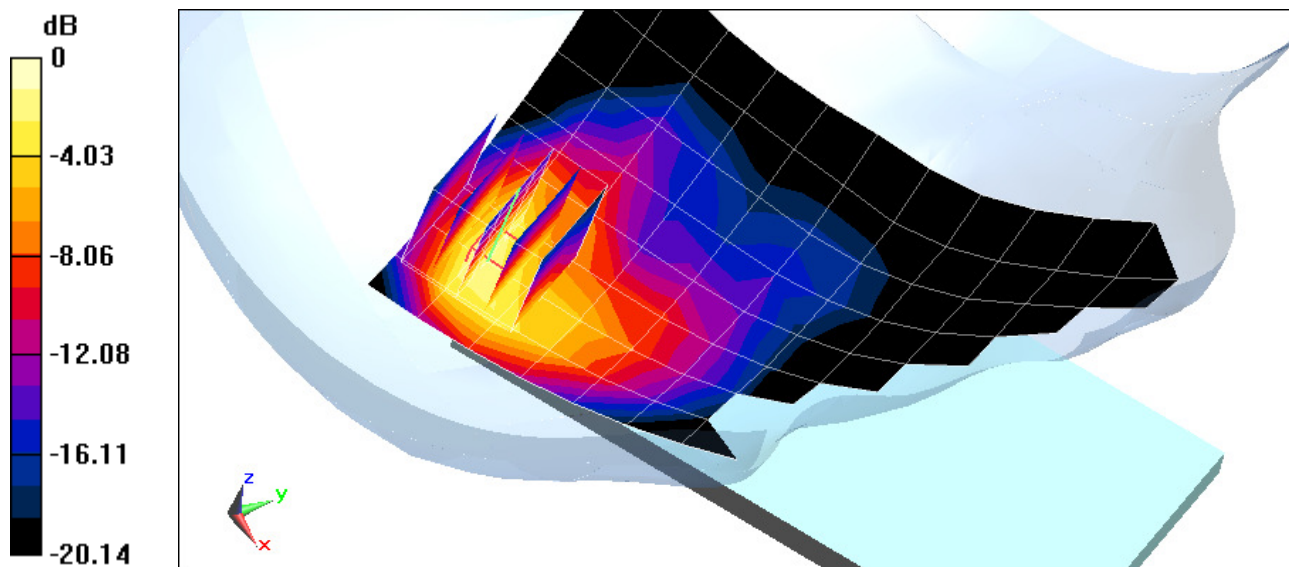

0 dB = 0.365 W/kg = -4.38 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT311; Type: Portable Tablet; Serial: 1604-1

Communication System: UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.433 \text{ S/m}$; $\epsilon_r = 40.037$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-15-2013; Ambient Temp: 22.0°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3288; ConvF(5.28, 5.28, 5.28); Calibrated: 9/20/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/19/2012

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Mode: UMTS 1900, Right Head, Cheek, Mid.ch


Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.509 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.748 W/kg

SAR(1 g) = 0.376 W/kg

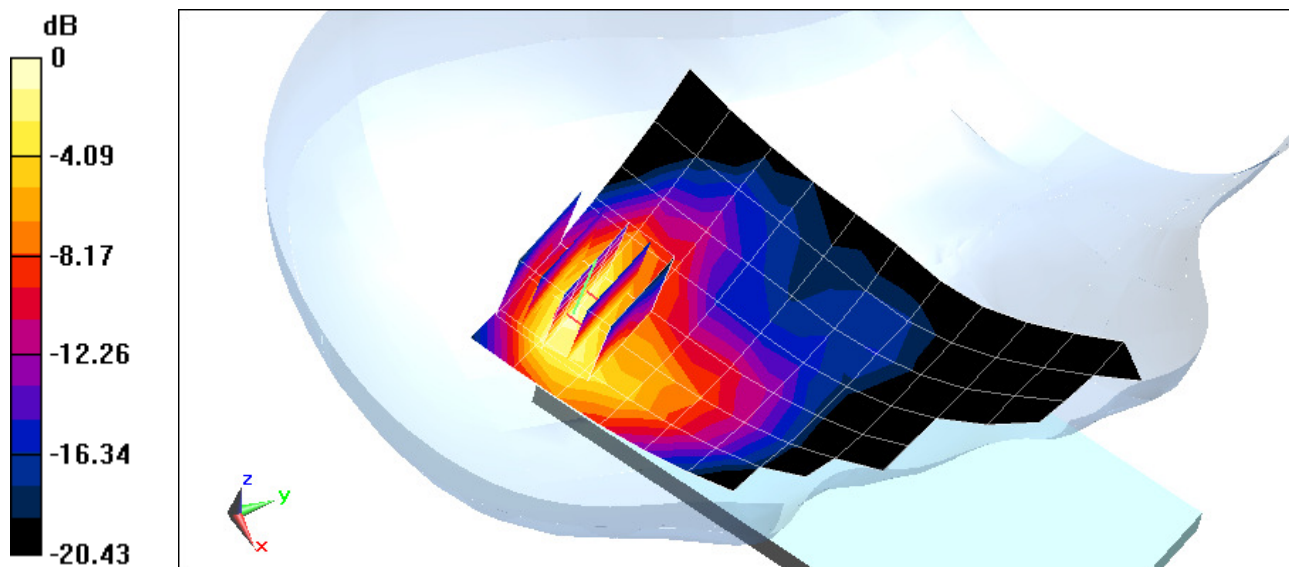

0 dB = 0.419 W/kg = -3.78 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT311; Type: Portable Tablet; Serial: 1604-4

Communication System: IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$; $\sigma = 1.831 \text{ S/m}$; $\epsilon_r = 37.781$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-18-2013; Ambient Temp: 24.4°C; Tissue Temp: 22.9°C

Probe: ES3DV2 - SN3022; ConvF(4.23, 4.23, 4.23); Calibrated: 8/28/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.9 (7117)

Mode: IEEE 802.11b, Right Head, Cheek, Ch 11, 1 Mbps


Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.172 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.00901 W/kg

SAR(1 g) = 0.00245 W/kg

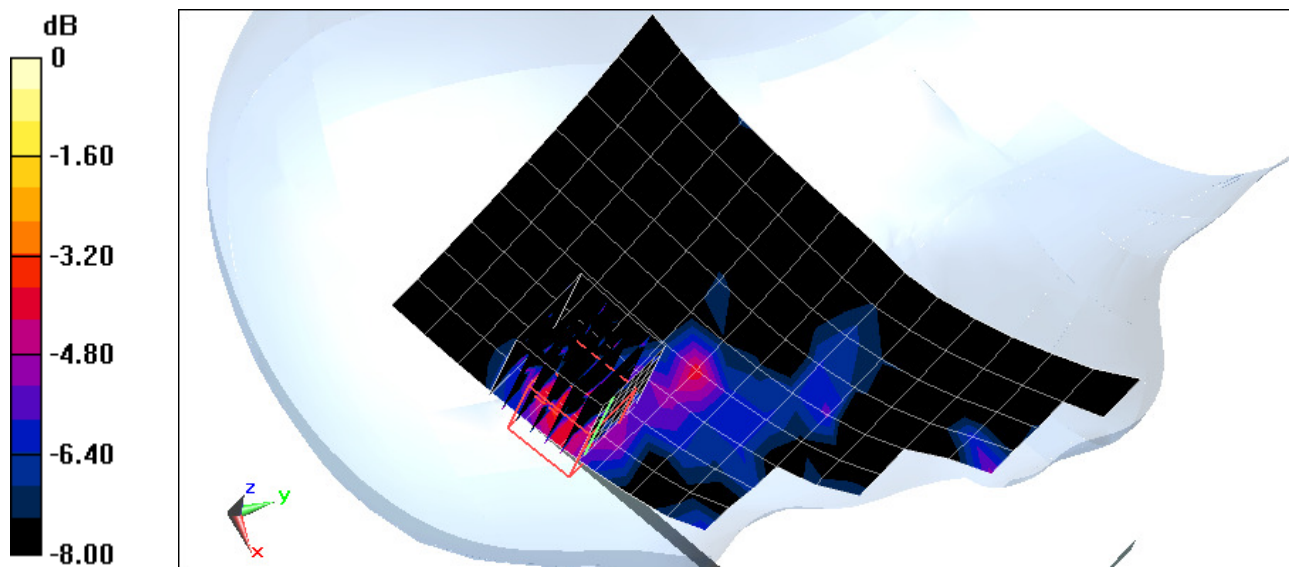

0 dB = 0.00700 W/kg = -21.55 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT311; Type: Portable Tablet; Serial: 1604-4

Communication System: IEEE 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used:

$f = 5540 \text{ MHz}$; $\sigma = 4.851 \text{ S/m}$; $\epsilon_r = 36.626$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-15-2013; Ambient Temp: 24.4°C; Tissue Temp: 23.5°C

Probe: EX3DV4 - SN3920; ConvF(4.52, 4.52, 4.52); Calibrated: 2/27/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Mode: IEEE 802.11a, 5.5 GHz, Right Head, Cheek, Ch 108, 6 Mbps


Area Scan (11x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 1.077 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0160 W/kg

SAR(1 g) = 0.00372 W/kg

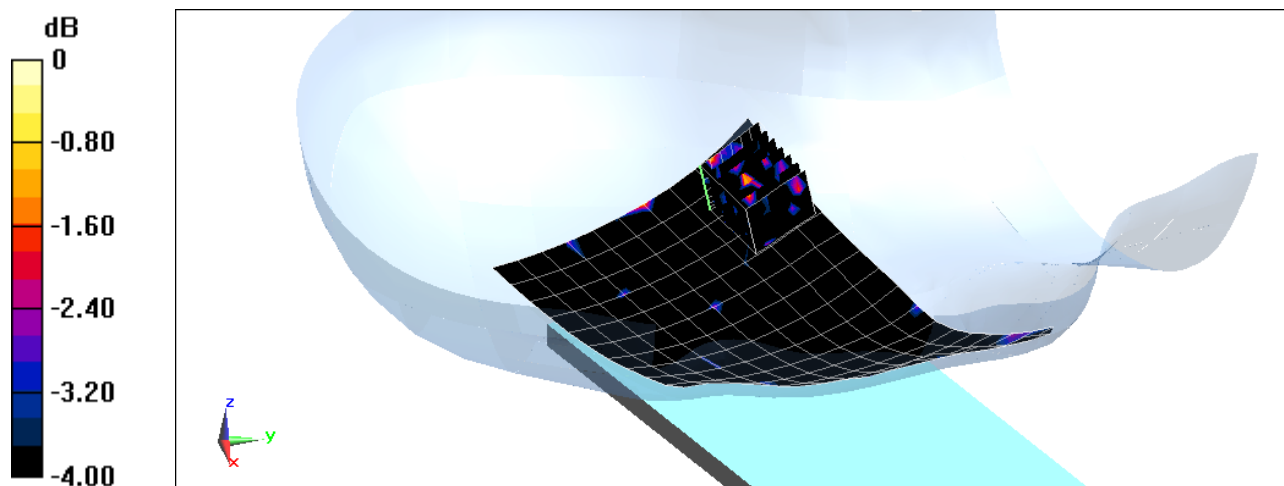

0 dB = 0.00800 W/kg = -20.97 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT311; Type: Portable Tablet; Serial: 1604-4

Communication System: IEEE 802.11a; Frequency: 5765 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used: Medium parameters used:

$f = 5765 \text{ MHz}$; $\sigma = 5.109 \text{ S/m}$; $\epsilon_r = 36.342$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-15-2013; Ambient Temp: 24.1°C; Tissue Temp: 23.2°C

Probe: EX3DV4 - SN3920; ConvF(4.02, 4.02, 4.02); Calibrated: 2/27/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Mode: IEEE 802.11a, 5.8 GHz, Left Head, Cheek, Ch 153, 6 Mbps


Area Scan (14x21x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 0.745 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.00143 W/kg

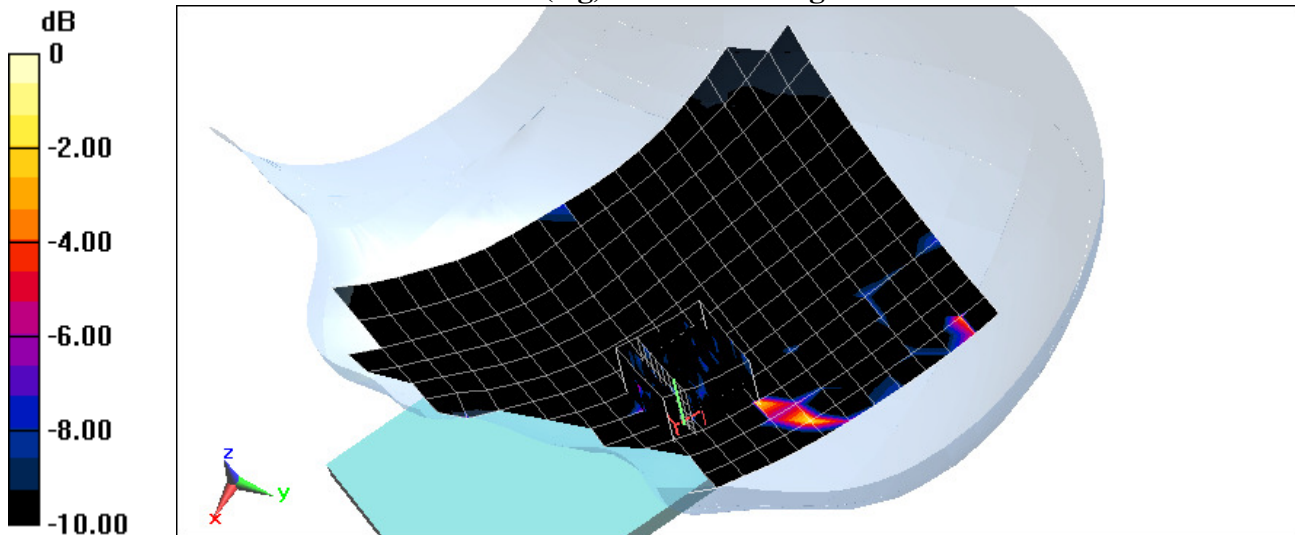

0 dB = 0.0391 W/kg = -14.08 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT311; Type: Portable Tablet; Serial: 1604-1

Communication System: GSM GPRS; 3 Tx slots; Frequency: 824.2 MHz; Duty Cycle: 1:2.76

Medium: 835 Body Medium parameters used (interpolated):

$f = 824.2 \text{ MHz}$; $\sigma = 1.005 \text{ S/m}$; $\epsilon_r = 54.112$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04-19-2013; Ambient Temp: 24.5°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0 Door; Type: QDOVA002BB; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Mode: GPRS 850, Body SAR, Back side, Low.ch, 3 Tx Slots


Area Scan (11x17x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 32.295 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 0.916 W/kg

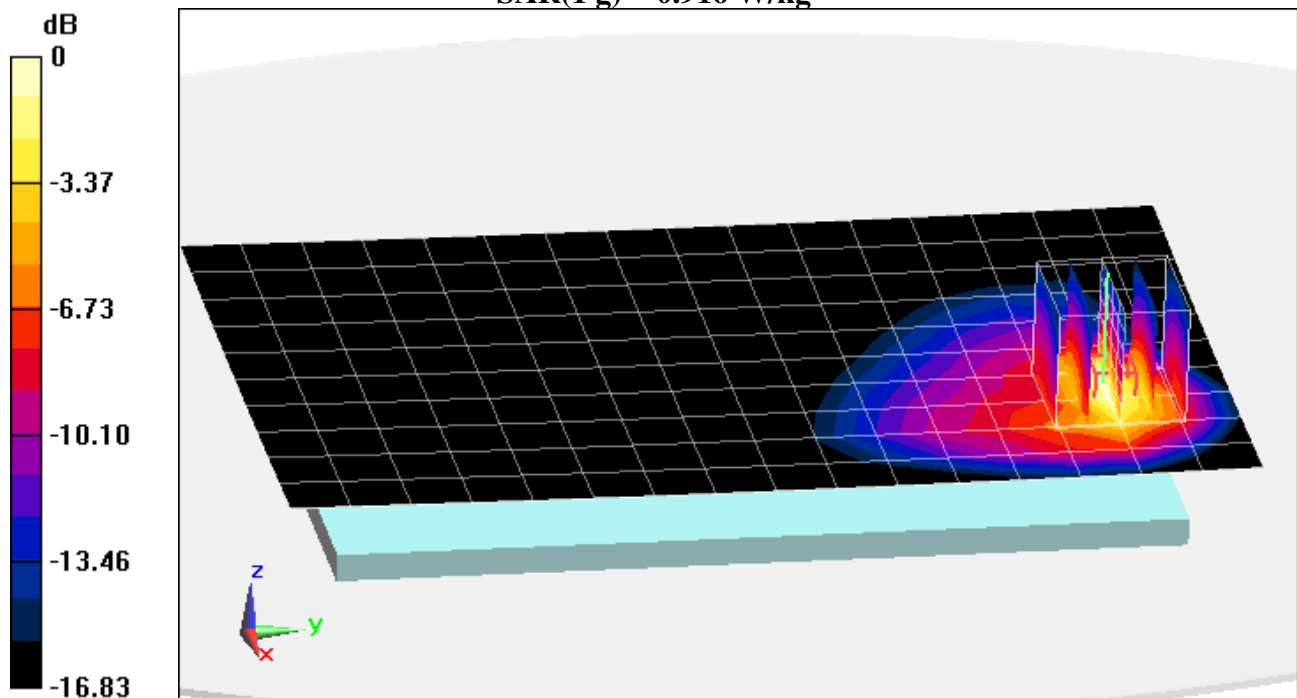

0 dB = 1.10 W/kg = 0.41 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT311; Type: Portable Tablet; Serial: 1604-1

Communication System: UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 1.018 \text{ S/m}$; $\epsilon_r = 54.002$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04-19-2013; Ambient Temp: 24.5°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0 Door; Type: QDOVA002BB; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Mode: UMTS 850, Body SAR, Back side, Mid.ch


Area Scan (11x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.994 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.983 W/kg

SAR(1 g) = 0.443 W/kg

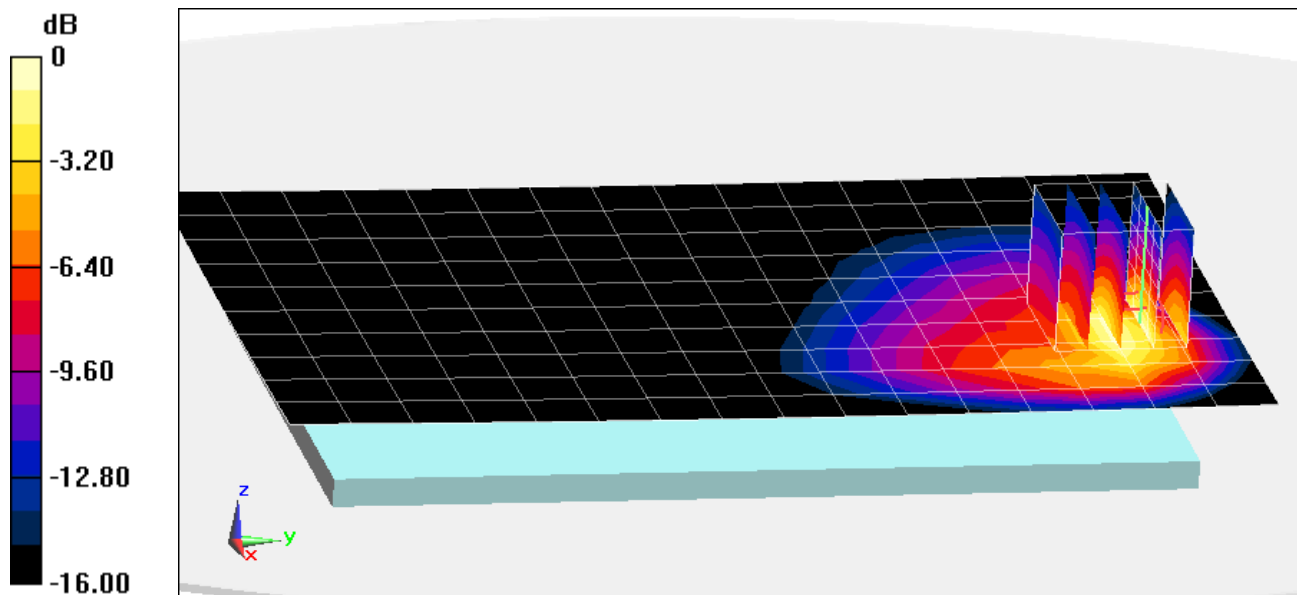

0 dB = 0.531 W/kg = -2.75 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT311; Type: Portable Tablet; Serial: 1604-1

Communication System: GSM GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.547 \text{ S/m}$; $\epsilon_r = 50.917$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04-22-2013; Ambient Temp: 21.9°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3288; ConvF(4.89, 4.89, 4.89); Calibrated: 9/20/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/19/2012

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Mode: GPRS 1900, Body SAR, Back side, Mid.ch, 3 Tx Slots


Area Scan (11x17x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.744 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.669 W/kg

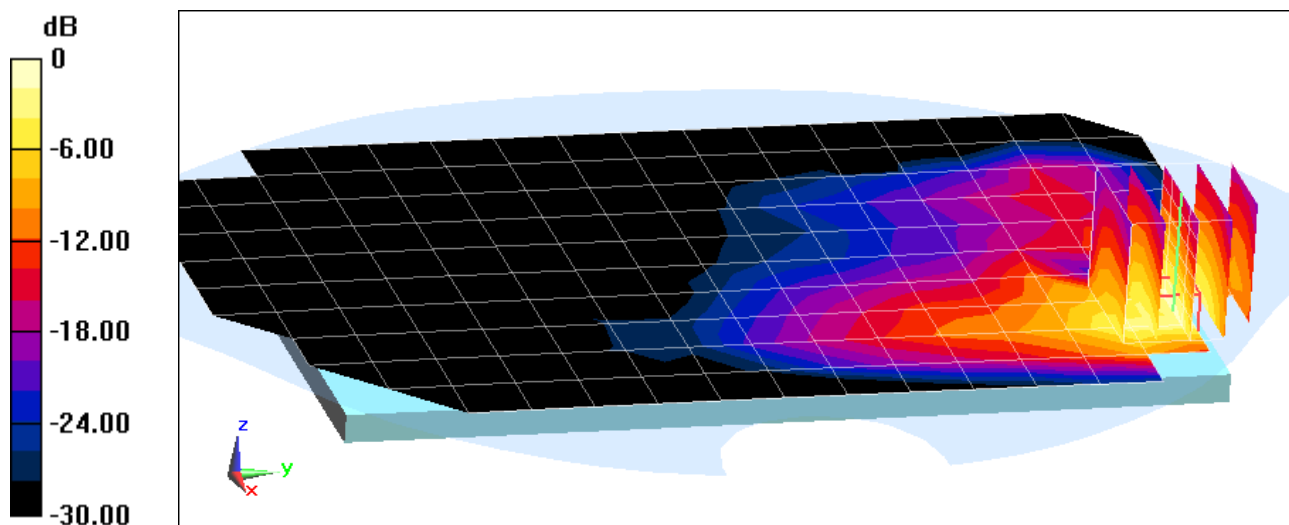

0 dB = 0.821 W/kg = -0.86 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT311; Type: Portable Tablet; Serial: 1604-1

Communication System: UMTS1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ S/m}$; $\epsilon_r = 51.438$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 05-03-2013; Ambient Temp: 23.9°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3287; ConvF(4.69, 4.69, 4.69); Calibrated: 11/15/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM with CRP; Type: SAM 4.0; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.9 (7117)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch


Area Scan (11x16x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.306 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 0.935 W/kg

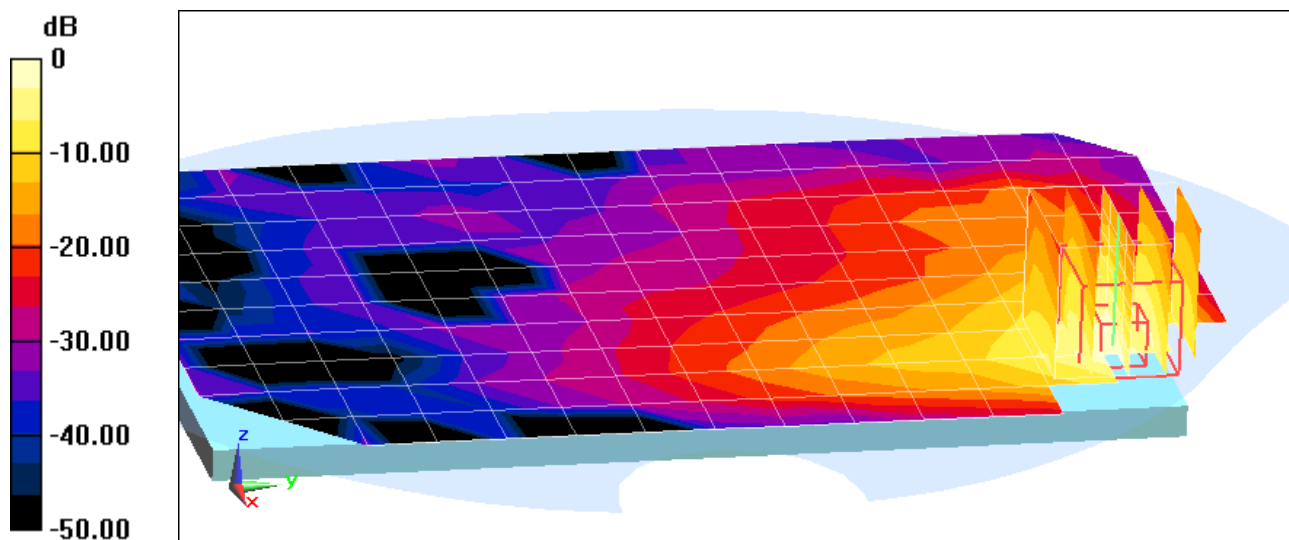

0 dB = 1.04 W/kg = 0.17 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT311; Type: Portable Tablet; Serial: 1604-1

Communication System: IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2412 \text{ MHz}$; $\sigma = 1.932 \text{ S/m}$; $\epsilon_r = 51.812$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04-24-2013; Ambient Temp: 23.1°C; Tissue Temp: 22.6°C

Probe: ES3DV3 - SN3258; ConvF(4.25, 4.25, 4.25); Calibrated: 2/11/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/15/2012

Phantom: SAM Front; Type: QD000P40CD; Serial: 1717

Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Mode: IEEE 802.11b, Body SAR, Ch 01, 1 Mbps, Back Side


Area Scan (12x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.237 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.85 W/kg

SAR(1 g) = 0.936 W/kg

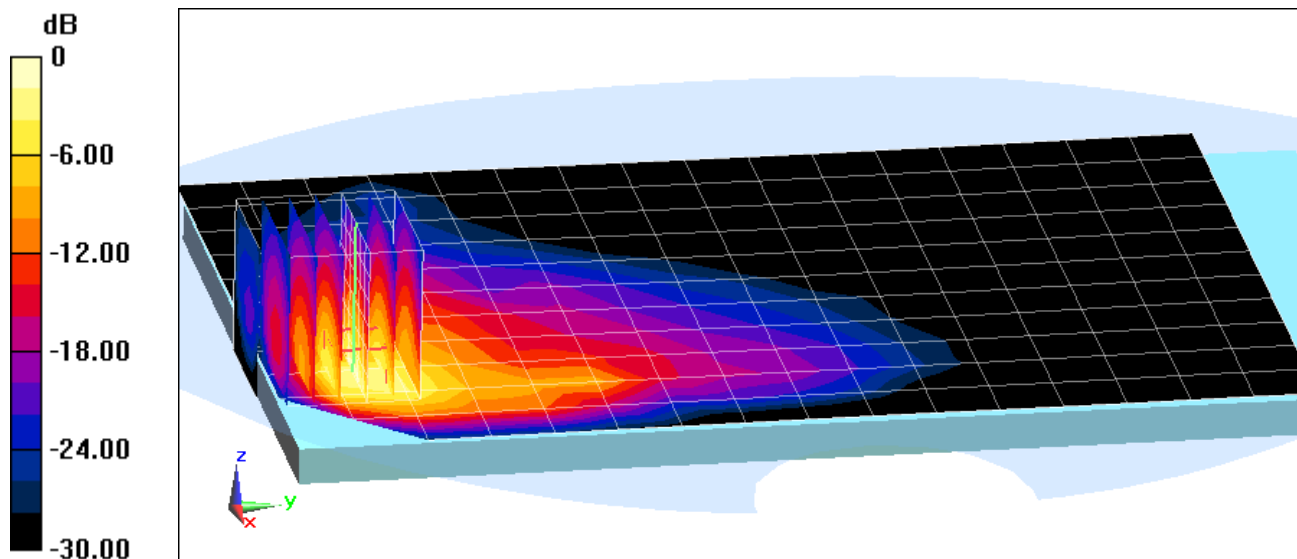

0 dB = 1.51 W/kg = 1.79 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT311; Type: Portable Tablet; Serial: 1604-1

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 1.972 \text{ S/m}$; $\epsilon_r = 52.138$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04-25-2013; Ambient Temp: 24.4°C; Tissue Temp: 23.2°C

Probe: ES3DV3 - SN3287; ConvF(4.29, 4.29, 4.29); Calibrated: 11/15/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM with CRP; Type: SAM 4.0; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.9 (7117)

Mode: Bluetooth, Body SAR, Ch 39, 1 Mbps, Back Side


Area Scan (13x21x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.192 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.318 W/kg

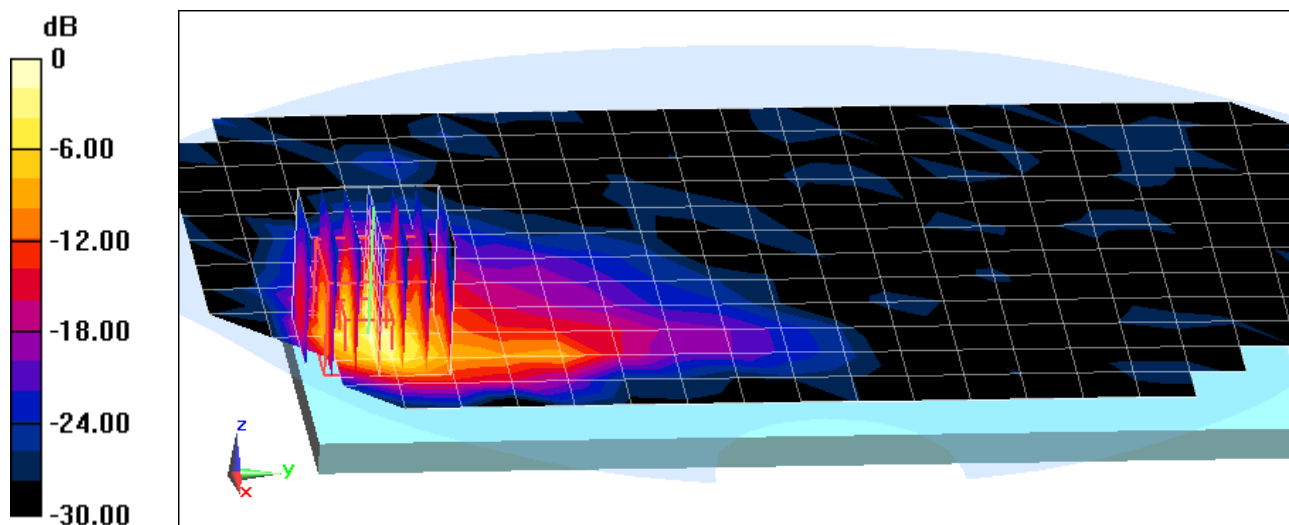

0 dB = 0.498 W/kg = -3.03 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT311; Type: Portable Tablet; Serial: 1604-4

Communication System: IEEE 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5220 \text{ MHz}$; $\sigma = 5.397 \text{ S/m}$; $\epsilon_r = 46.853$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-03-2013; Ambient Temp: 23.4°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3589; ConvF(3.99, 3.99, 3.99); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.9 (7117)

Mode: IEEE 802.11a, 5.2 GHz, Body SAR, Ch 44, 6 Mbps, Back Side


Area Scan (16x11x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio:1.4

Reference Value = 13.793 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 6.39 W/kg

SAR(1 g) = 0.836 W/kg

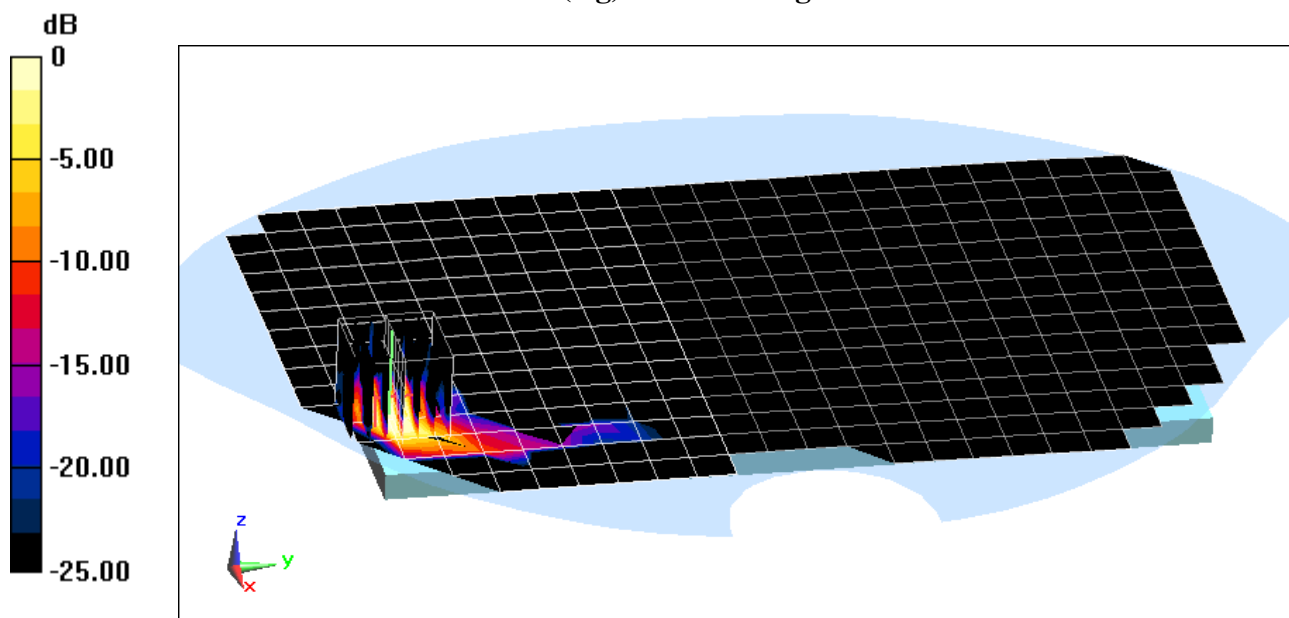

0 dB = 0.800 W/kg = -0.97 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMT311; Type: Portable Tablet; Serial: 1604-4

Communication System: 802.11a; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5805 \text{ MHz}$; $\sigma = 6.216 \text{ S/m}$; $\epsilon_r = 46.086$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 06-03-2013; Ambient Temp: 23.5°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN3589; ConvF(3.66, 3.66, 3.66); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.9 (7117)

Mode: IEEE 802.11a, 5.8 GHz, Body SAR, Ch 161, 6 Mbps, Back Side


Area Scan (16x25x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 5.832 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 4.15 W/kg

SAR(1 g) = 0.236 W/kg

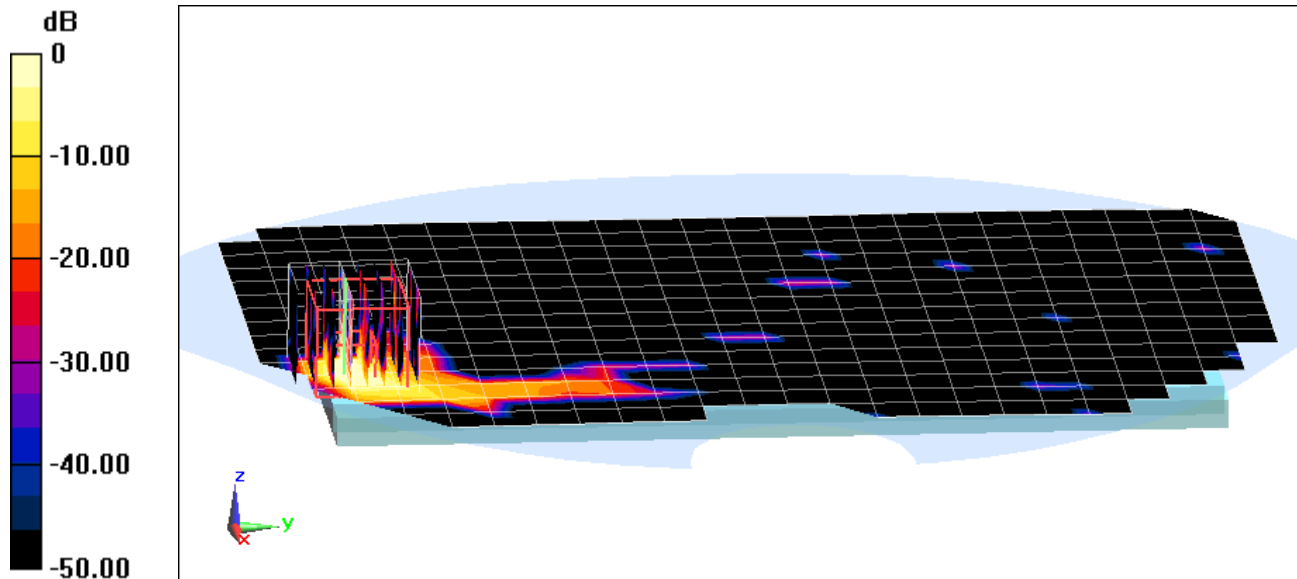

0 dB = 0.794 W/kg = -1.00 dBW/kg

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: 835MHz SAR Validation Dipole; Type: D835V2; Serial: 4d026

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.924 \text{ S/m}$; $\epsilon_r = 41.29$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-16-2013; Ambient Temp: 23.5°C; Tissue Temp: 22.7°C

Probe: ES3DV2 - SN3022; ConvF(6.03, 6.03, 6.03); Calibrated: 8/28/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.9 (7117)

835MHz System Verification

Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power: 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.961 W/kg

Deviation = 2.34%

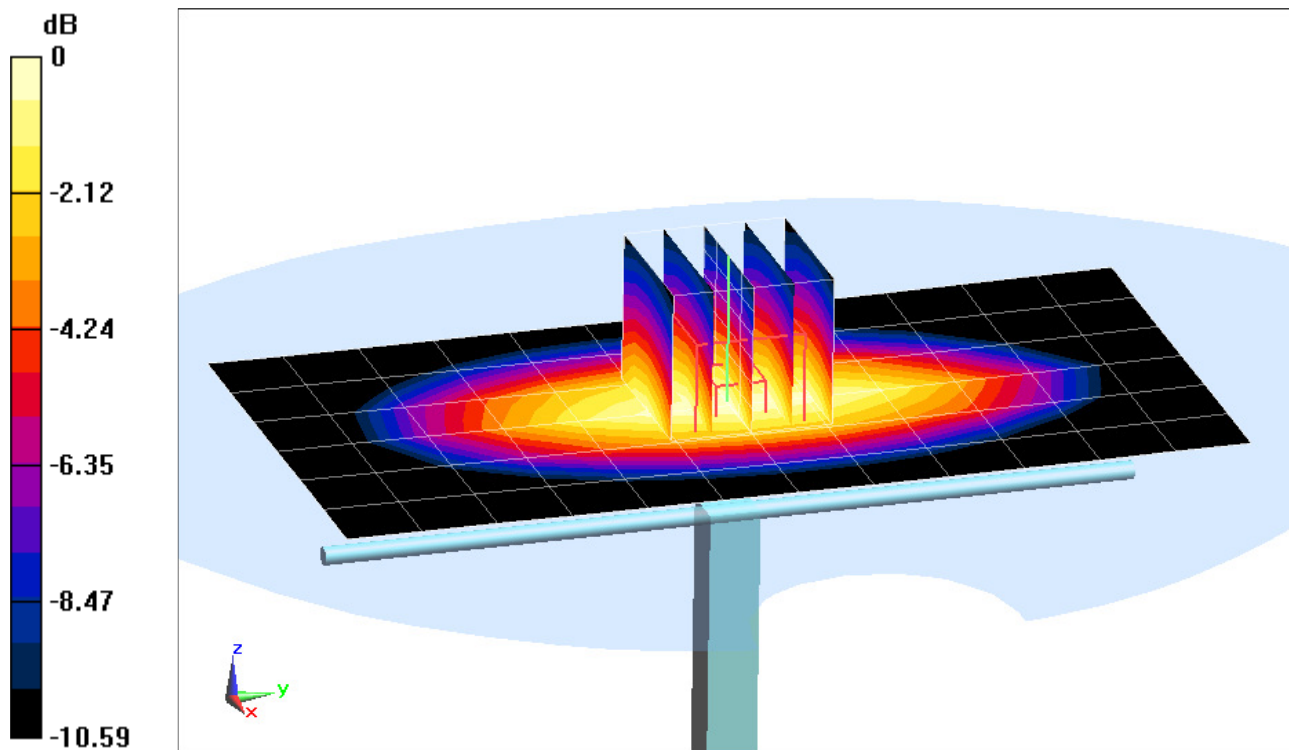

0 dB = 1.04 W/kg = 0.17 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: 1900 Head Medium parameters used (interpolated):
 $f = 1900 \text{ MHz}$; $\sigma = 1.452 \text{ S/m}$; $\epsilon_r = 39.953$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Space: 1.0 cm

Test Date: 04-15-2013; Ambient Temp: 22.0°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3288; ConvF(5.28, 5.28, 5.28); Calibrated: 9/20/2012;
Sensor-Surface: 4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 9/19/2012
Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646
Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

1900 MHz System Verification

Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power: 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 7.32 W/kg

SAR(1 g) = 3.87 W/kg

Deviation: -2.52%

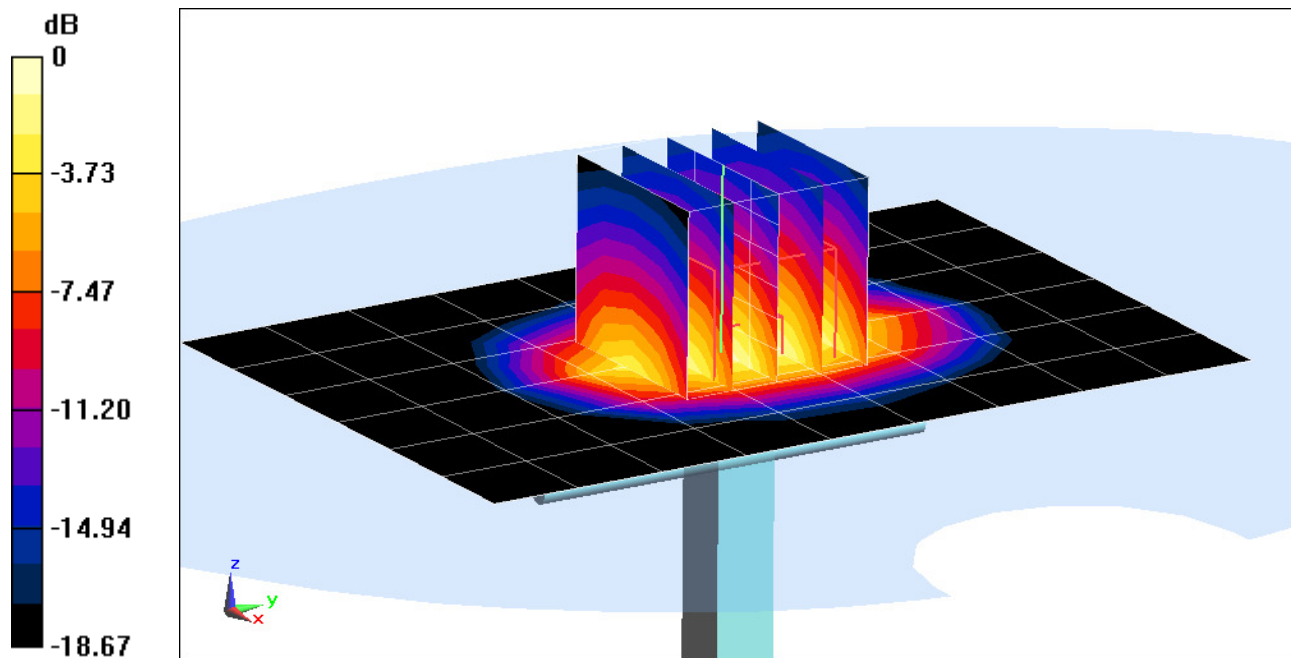

0 dB = 4.29 W/kg = 6.32 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.812 \text{ S/m}$; $\epsilon_r = 37.839$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-18-2013; Ambient Temp: 24.4°C; Tissue Temp: 22.9°C

Probe: ES3DV2 - SN3022; ConvF(4.23, 4.23, 4.23); Calibrated: 8/28/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.9 (7117)

2450MHz System Verification

Area Scan (6x8x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Input Power: 20 dBm (100 mW)

Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 5.33 W/kg

Deviation = 1.14%

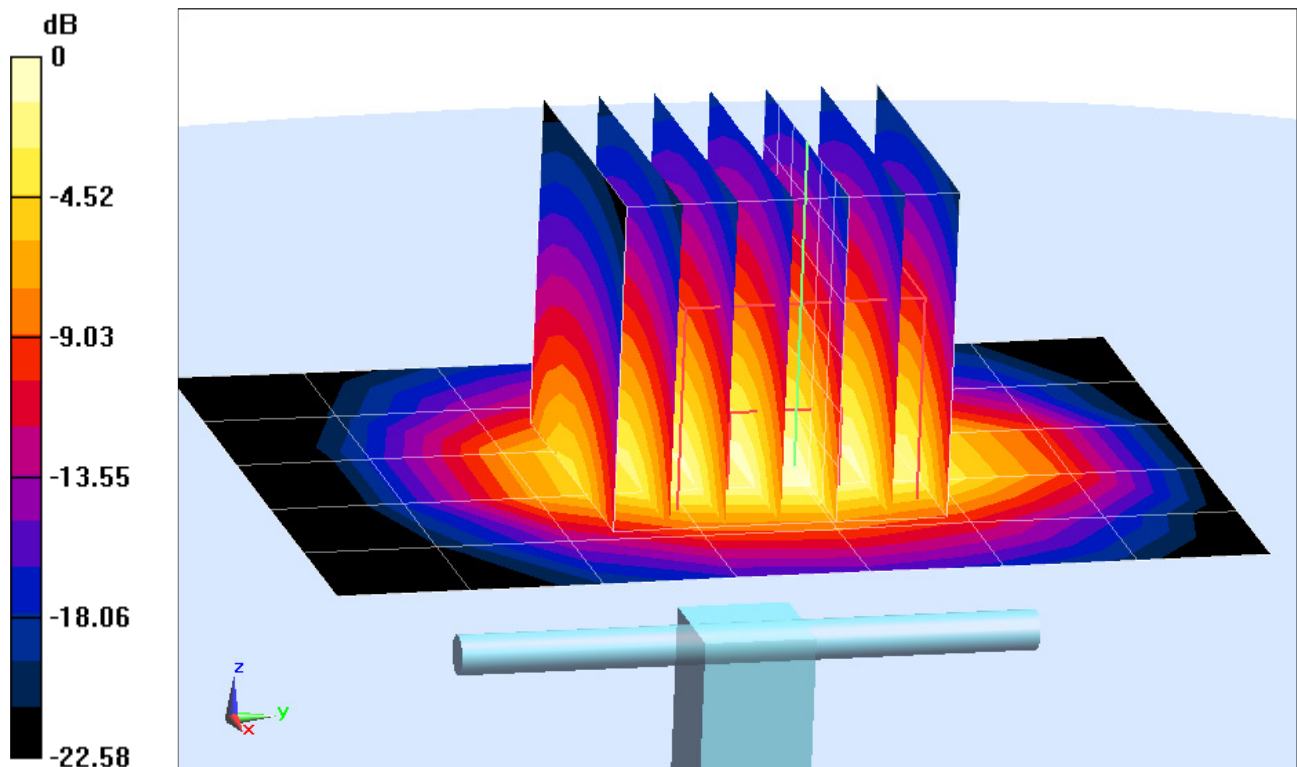

0 dB = 6.88 W/kg = 8.38 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5200 MHz; Type: D5GHzV2; Serial: 1120

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: 5GHz Head; Medium parameters used:

$f = 5200 \text{ MHz}$; $\sigma = 4.503 \text{ S/m}$; $\epsilon_r = 37.085$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2013; Ambient Temp: 24.6°C; Tissue Temp: 23.6°C

Probe: EX3DV4 - SN3920; ConvF(4.87, 4.87, 4.87); Calibrated: 2/27/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (6);SEMCAD X Version 14.6.9 (7117)

5200 MHz System Verification

Area Scan (7x8x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power: 16.0 dBm (40 mW)

Peak SAR (extrapolated) = 12.8 W/kg

SAR(1 g) = 3.14 W/kg

Deviation = 3.29%

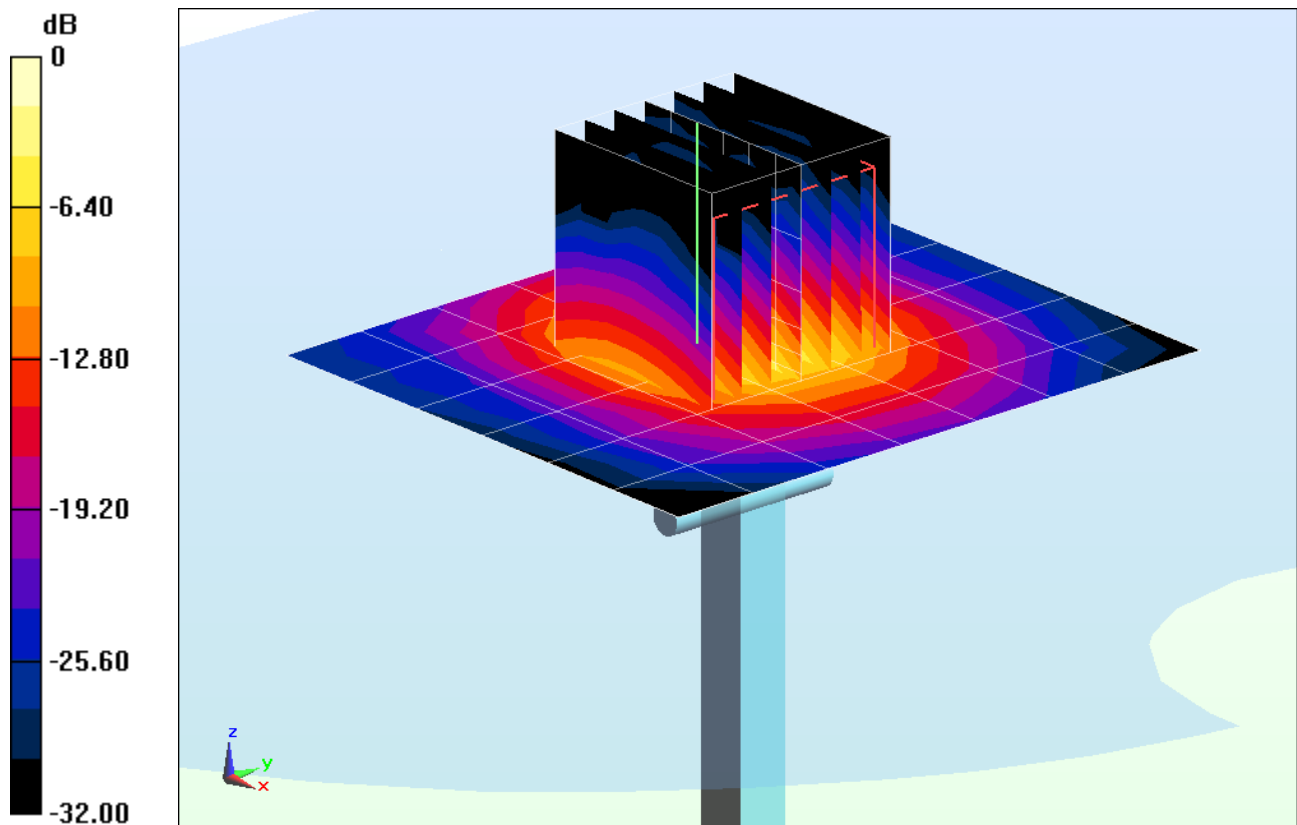

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5300 MHz; Type: D5GHzV2; Serial: 1120

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5GHz Head; Medium parameters used:

$f = 5300 \text{ MHz}$; $\sigma = 4.607 \text{ S/m}$; $\epsilon_r = 36.977$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2013; Ambient Temp: 24.4°C; Tissue Temp: 23.6°C

Probe: EX3DV4 - SN3920; ConvF(4.73, 4.73, 4.73); Calibrated: 2/27/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (6);SEMCAD X Version 14.6.9 (7117)

5300 MHz System Verification

Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power: 16.0 dBm (40 mW)

Peak SAR (extrapolated) = 12.8 W/kg

SAR(1 g) = 3.12 W/kg

Deviation = -0.89%

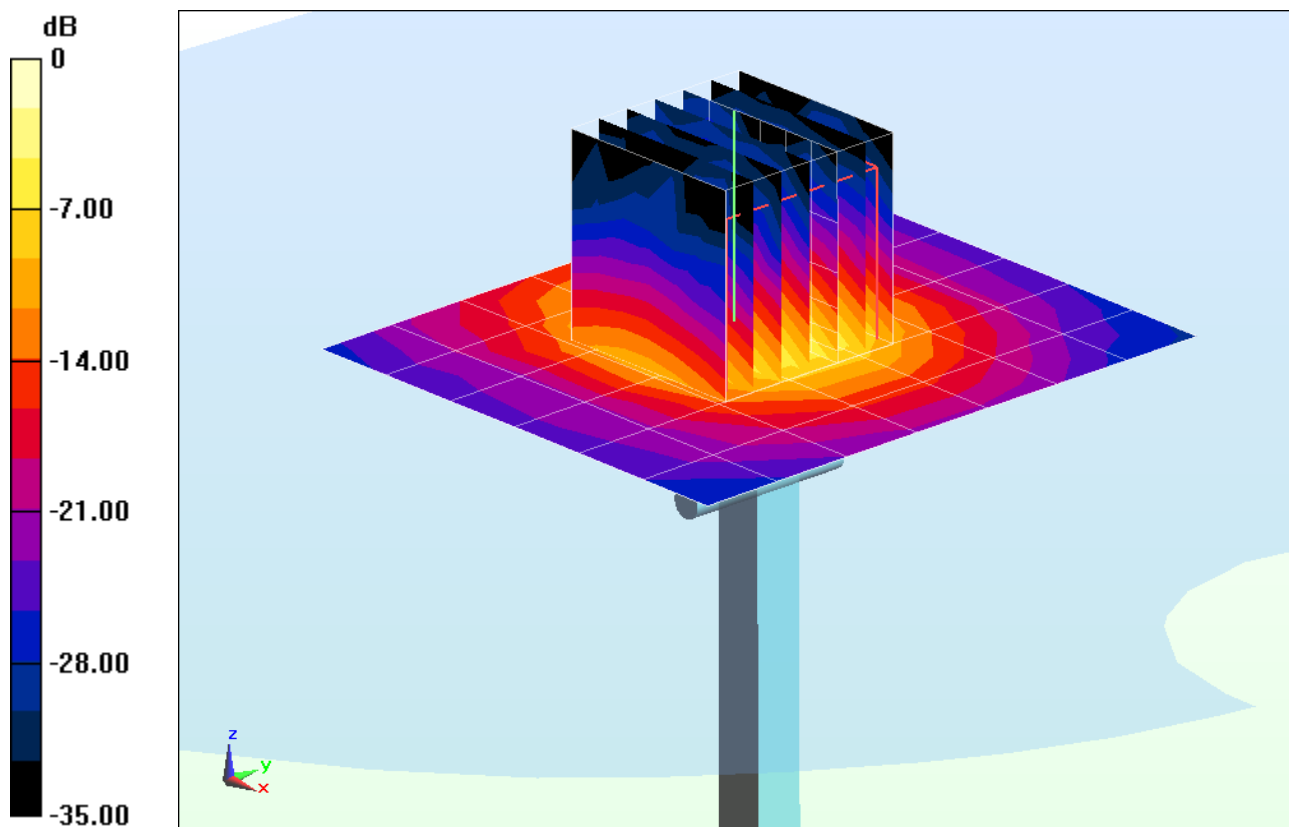

0 dB = 6.04 W/kg = 7.81 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1120

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5GHz Head; Medium parameters used:

$f = 5500 \text{ MHz}$; $\sigma = 4.815 \text{ S/m}$; $\epsilon_r = 36.719$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2013; Ambient Temp: 24.4°C; Tissue Temp: 23.5°C

Probe: EX3DV4 - SN3920; ConvF(4.52, 4.52, 4.52); Calibrated: 2/27/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (6);SEMCAD X Version 14.6.9 (7117)

5500 MHz System Verification

Area Scan (7x8x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power: 16.0 dBm (40 mW)

Peak SAR (extrapolated) = 12.9 W/kg

SAR(1 g) = 3.03 W/kg

Deviation = -5.43%

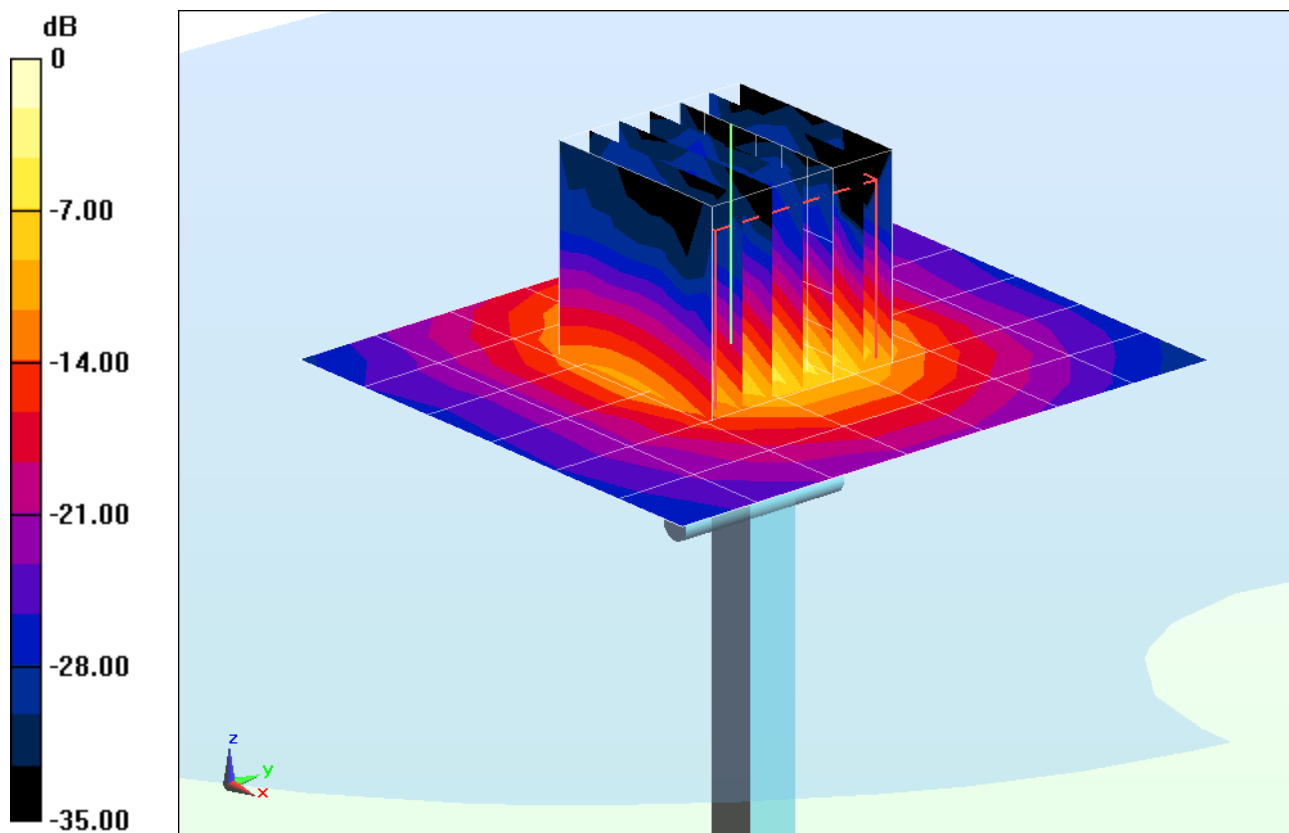

0 dB = 7.22 W/kg = 8.59 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1120

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5GHz Head; Medium parameters used:

$f = 5800 \text{ MHz}$; $\sigma = 5.151 \text{ S/m}$; $\epsilon_r = 36.239$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2013; Ambient Temp: 24.1°C; Tissue Temp: 23.2°C

Probe: EX3DV4 - SN3920; ConvF(4.02, 4.02, 4.02); Calibrated: 2/27/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (6);SEMCAD X Version 14.6.9 (7117)

5800 MHz System Verification

Area Scan (7x8x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power: 16.0 dBm (40 mW)

Peak SAR (extrapolated) = 13.2 W/kg

SAR(1 g) = 3.06 W/kg

Deviation = 2.14%

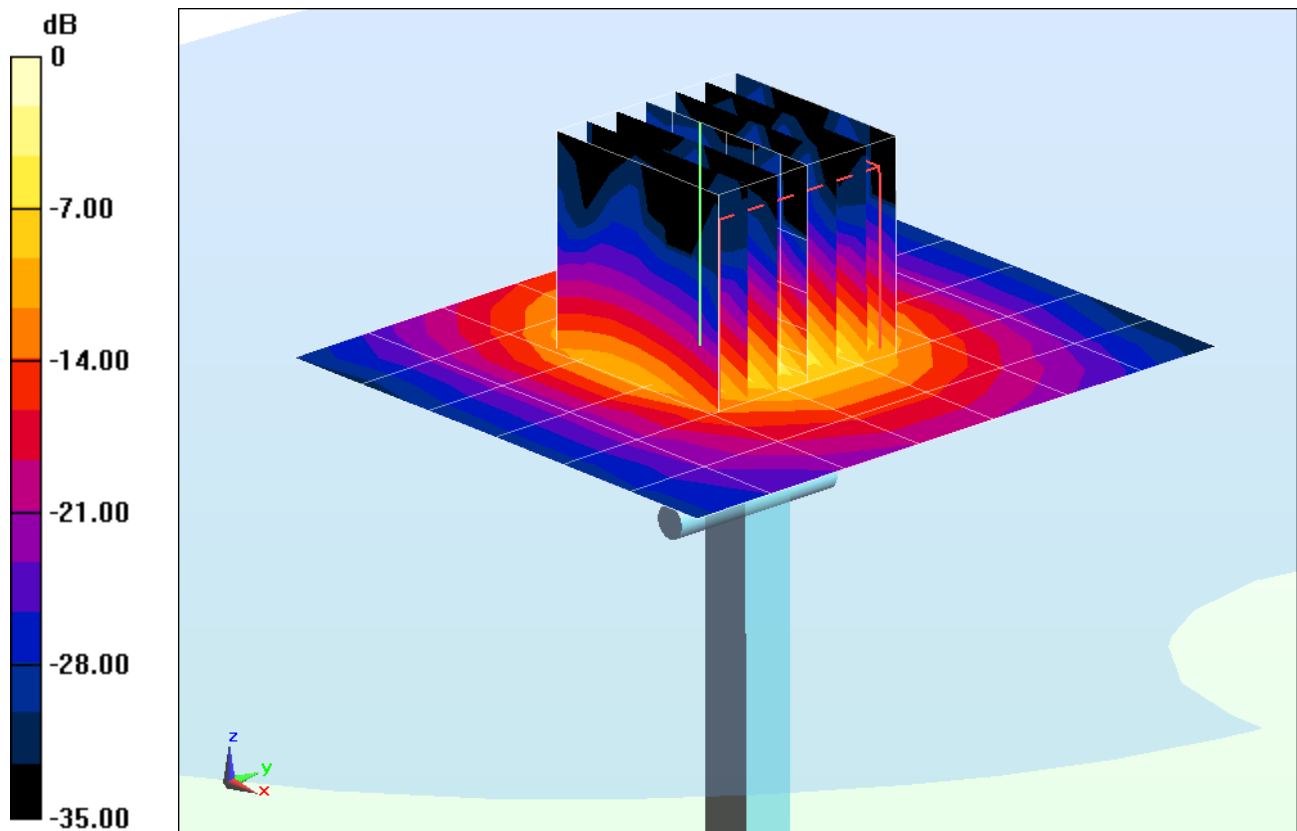

0 dB = 7.30 W/kg = 8.63 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 1.016 \text{ S/m}$; $\epsilon_r = 54.026$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-19-2013; Ambient Temp: 24.5°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0 Door; Type: QDOVA002BB; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power: 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.996 W/kg

Deviation = 6.41%

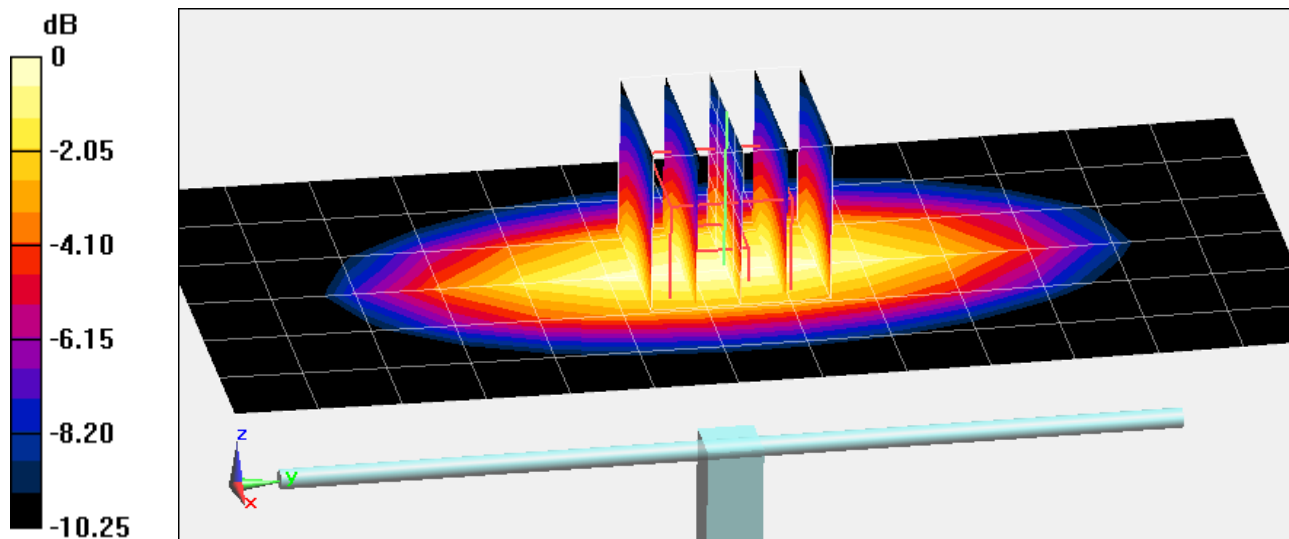

0 dB = 1.08 W/kg = 0.33 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.567 \text{ S/m}$; $\epsilon_r = 50.859$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Space: 1.0 cm

Test Date: 04-22-2013; Ambient Temp: 21.9°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3288; ConvF(4.89, 4.89, 4.89); Calibrated: 9/20/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/19/2012

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

1900 MHz System Verification

Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power: 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 7.65 W/kg

SAR(1 g) = 4.25 W/kg

Deviation: 4.17%

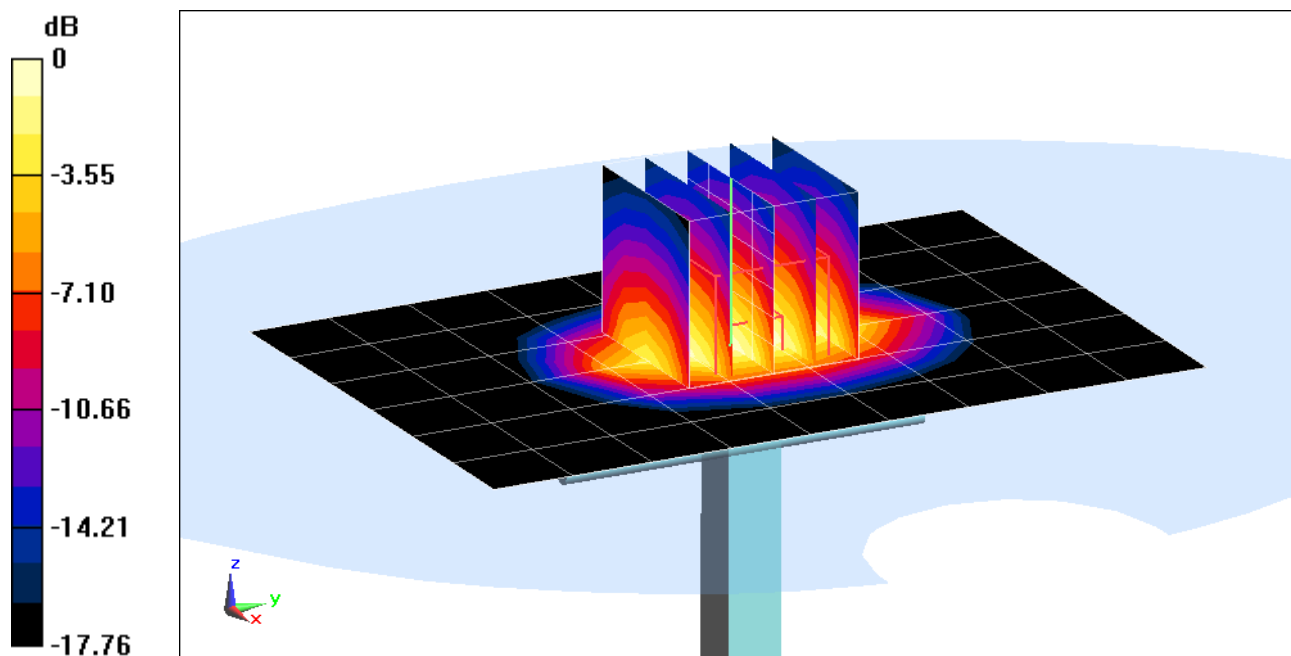

0 dB = 4.77 W/kg = 6.79 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.579 \text{ S/m}$; $\epsilon_r = 51.319$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-03-2013; Ambient Temp: 23.9°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3287; ConvF(4.69, 4.69, 4.69); Calibrated: 11/15/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM with CRP; Type: SAM 4.0; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.9 (7117)

1900MHz System Verification

Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power: 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 7.33 W/kg

SAR(1 g) = 4 W/kg

Deviation = -0.74%

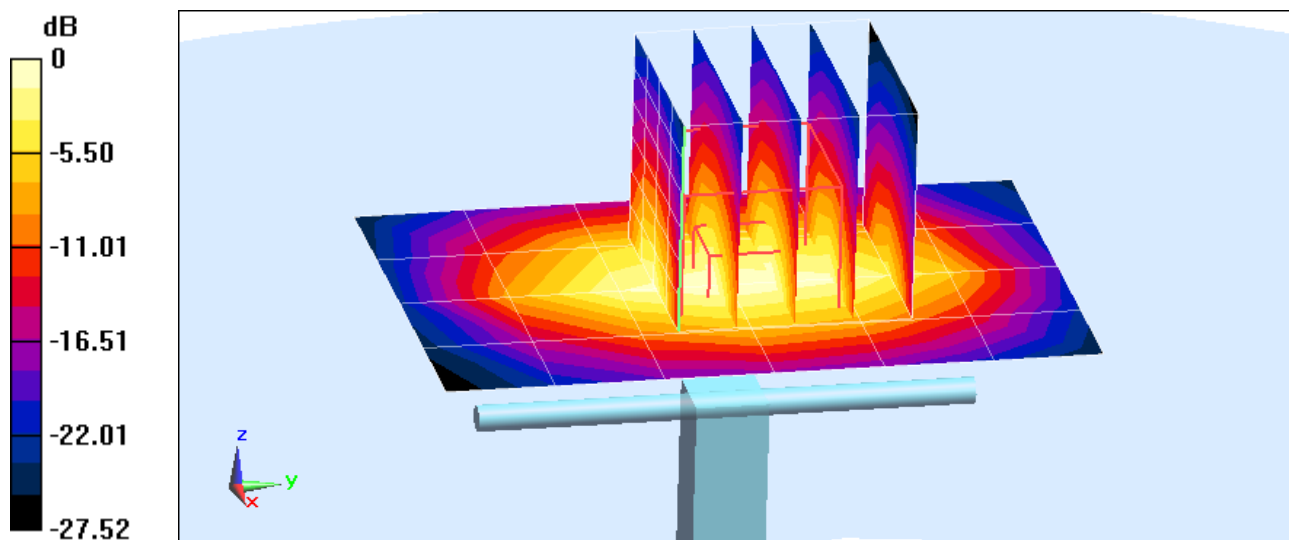

0 dB = 4.42 W/kg = 6.46 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.983 \text{ S/m}$; $\epsilon_r = 51.623$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-24-2013; Ambient Temp: 23.1°C; Tissue Temp: 22.6°C

Probe: ES3DV3 - SN3258; ConvF(4.25, 4.25, 4.25); Calibrated: 2/11/2013;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/15/2012

Phantom: SAM Front; Type: QD000P40CD; Serial: 1717

Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

2450 MHz System Verification

Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power: 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 10.5 W/kg

SAR(1 g) = 4.86 W/kg

Deviation = -2.02%

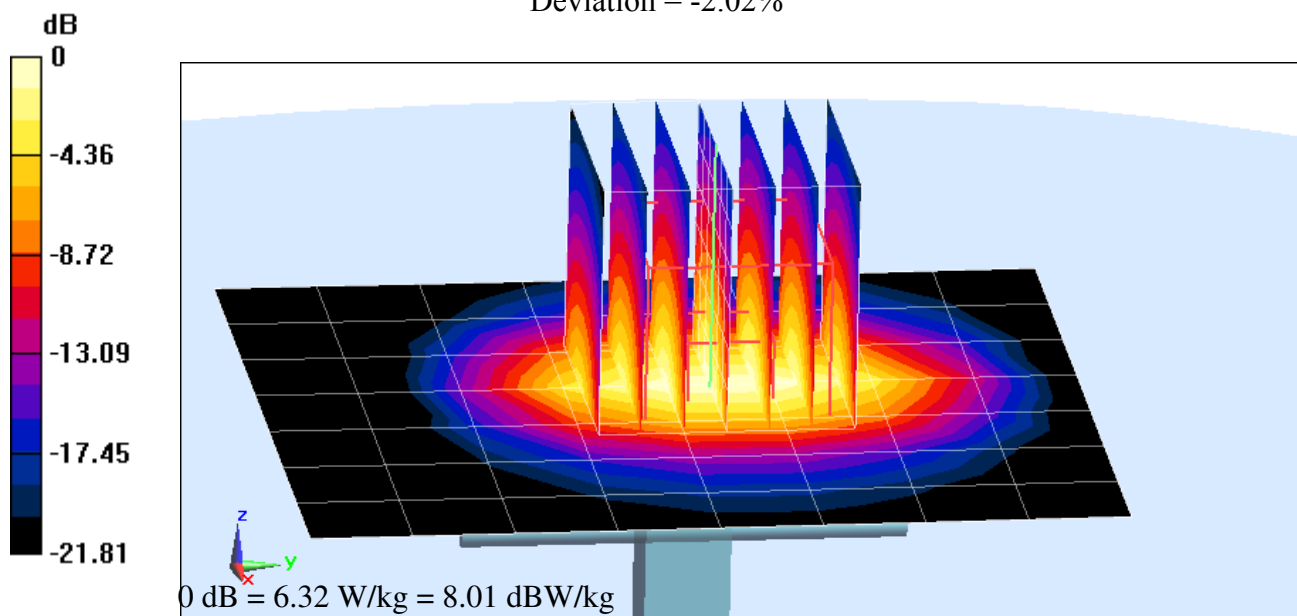

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.979 \text{ S/m}$; $\epsilon_r = 52.092$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-25-2013; Ambient Temp: 24.4°C; Tissue Temp: 23.2°C

Probe: ES3DV3 - SN3287; ConvF(4.29, 4.29, 4.29); Calibrated: 11/15/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM with CRP; Type: SAM 4.0; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.9 (7117)

2450MHz System Verification

Area Scan (6x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Input Power: 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 5.25 W/kg

Deviation = 1.74%

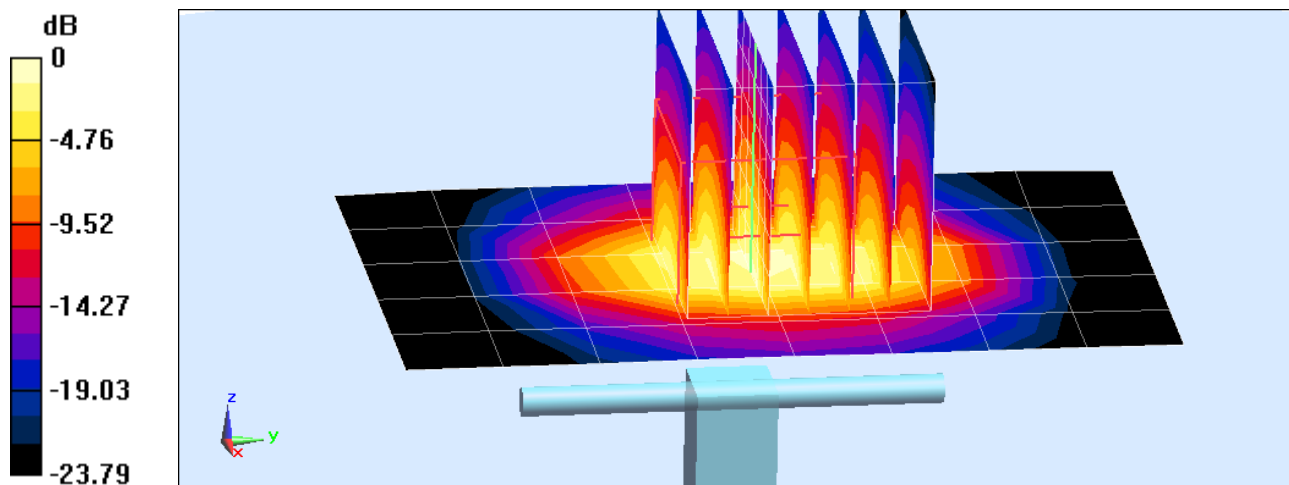

0 dB = 6.96 W/kg = 8.43 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5200 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5200 \text{ MHz}$; $\sigma = 5.362 \text{ S/m}$; $\epsilon_r = 46.974$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-03-2013; Ambient Temp: 23.4°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3589; ConvF(3.99, 3.99, 3.99); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.9 (7117)

5200MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power: 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 28.5 W/kg

SAR(1 g) = 7.38 W/kg

Deviation = -2.25%

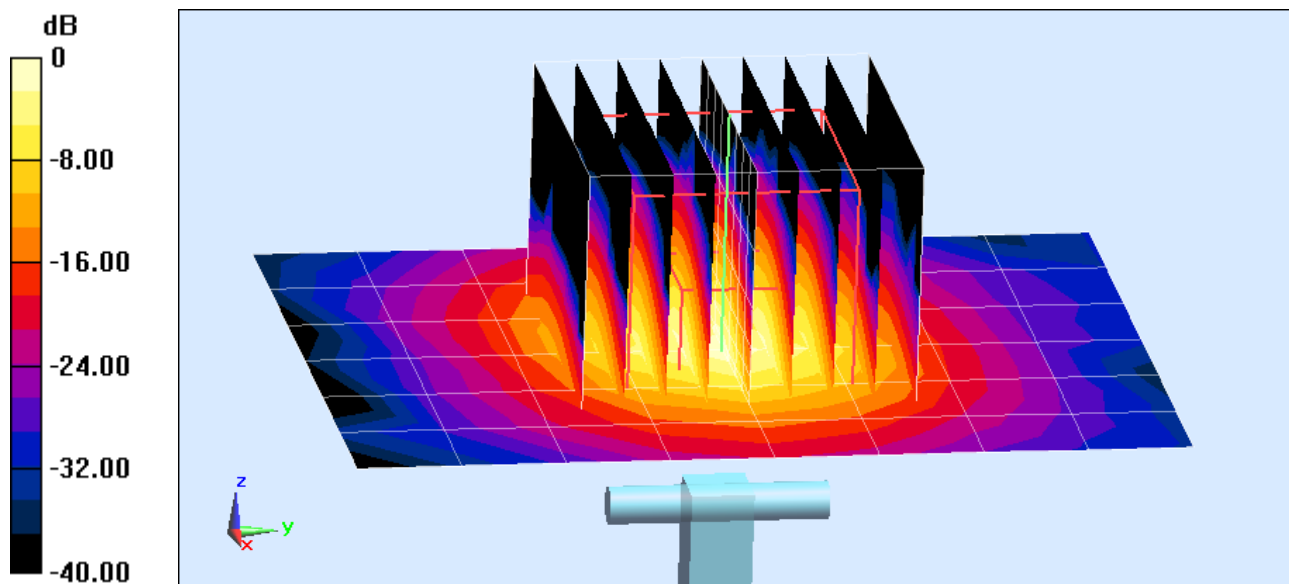

0 dB = 17.7 W/kg = 12.48 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5300 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5300 \text{ MHz}$; $\sigma = 5.539 \text{ S/m}$; $\epsilon_r = 46.972$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-03-2013; Ambient Temp: 23.4°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3589; ConvF(3.81, 3.81, 3.81); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.9 (7117)

5300MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power: 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 33.1 W/kg

SAR(1 g) = 7.88 W/kg

Deviation = 4.65%

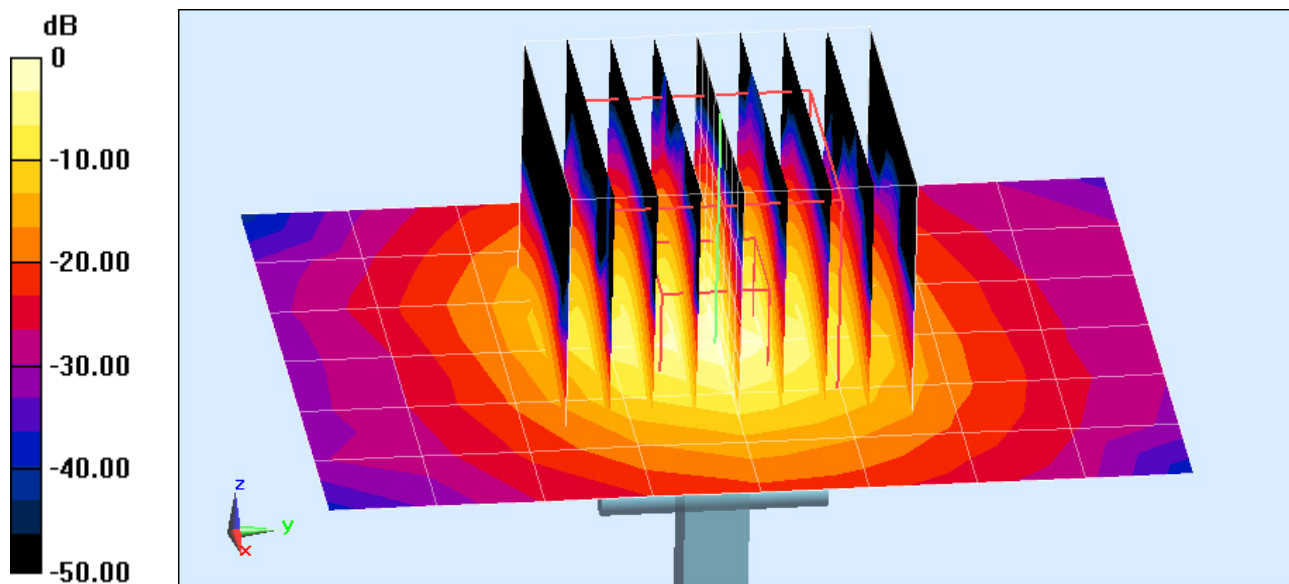

0 dB = 18.9 W/kg = 12.76 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5500 \text{ MHz}$; $\sigma = 5.762 \text{ S/m}$; $\epsilon_r = 46.35$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-03-2013; Ambient Temp: 23.4°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3589; ConvF(3.52, 3.52, 3.52); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.9 (7117)

5500MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power: 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 31.5 W/kg

SAR(1 g) = 7.6 W/kg

Deviation(1 g) = -5.94%

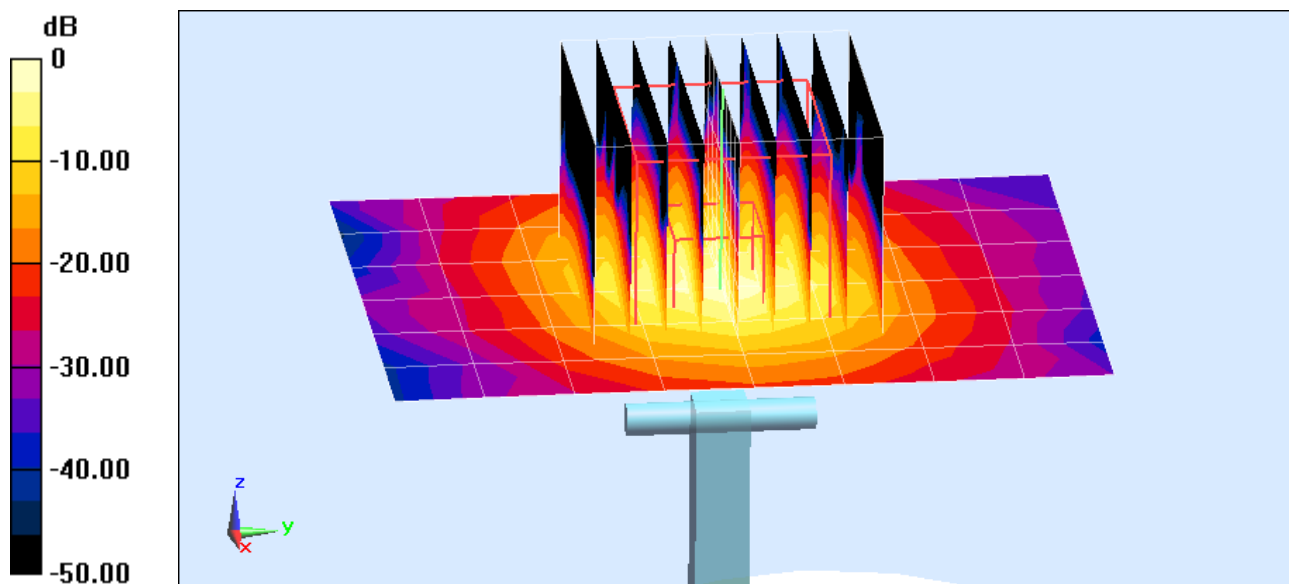

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5600 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 5.877 \text{ S/m}$; $\epsilon_r = 46.246$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-03-2013; Ambient Temp: 23.5°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN3589; ConvF(3.32, 3.32, 3.32); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.9 (7117)

5600MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power: 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 33.6 W/kg

SAR(1 g) = 8.07 W/kg

Deviation = 0.50%

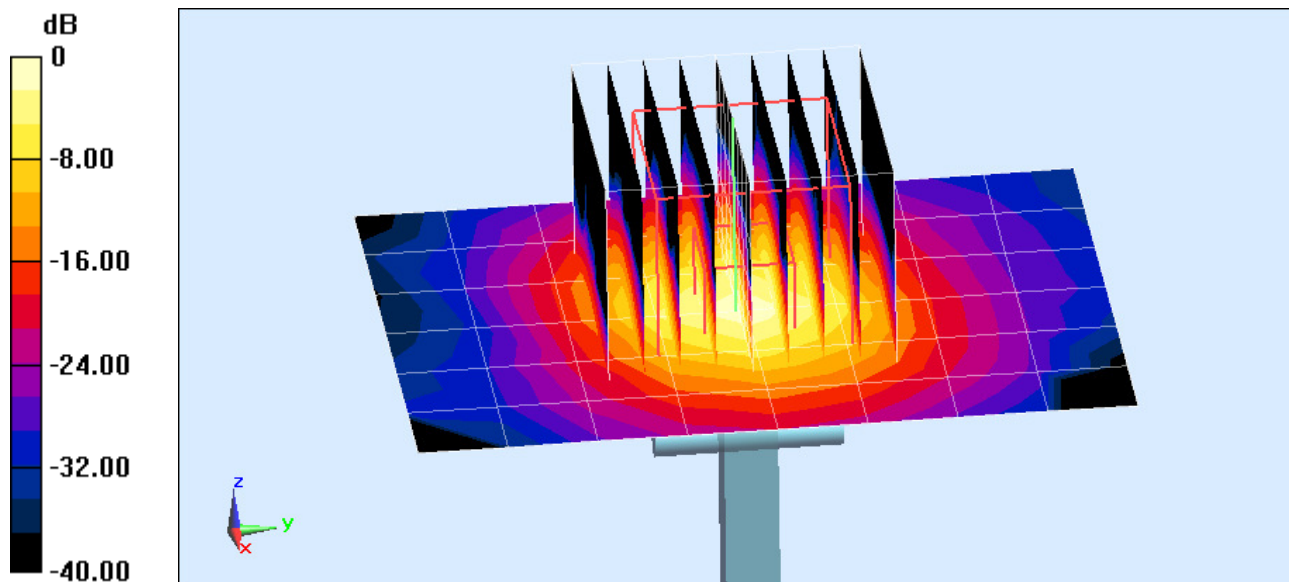

0 dB = 19.5 W/kg = 12.90 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5800 \text{ MHz}$; $\sigma = 6.222 \text{ S/m}$; $\epsilon_r = 46.066$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-03-2013; Ambient Temp: 23.5°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN3589; ConvF(3.66, 3.66, 3.66); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.9 (7117)

5800MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power: 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 31.1 W/kg

SAR(1 g) = 7.21 W/kg

Deviation = -3.99%

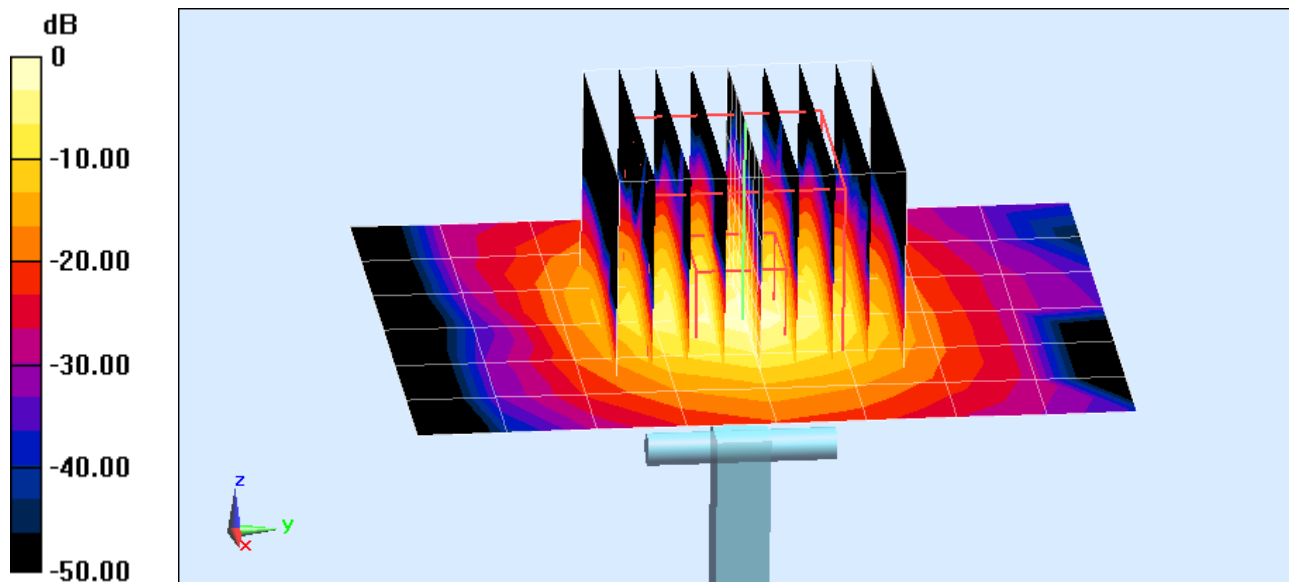

0 dB = 18.2 W/kg = 12.60 dBW/kg