



FCC TEST REPORT

According to

47 CFR, Part 2, Part 15 and CISPR PUB. 22


Applicant	: LG Electronics USA
Address	: 1000 Sylvan Avenue Englewood Cliffs New Jersey United States
Manufacturer	: Hewlett-Packard Company.
Address	: 11445 Compaq Center Drive West Houston, TX 77070, U.S.A.
Equipment	: LCD Monitor
Model No.	: HSTND-3251-L
FCC ID	: BEJHSTND-3251-L

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of **CerpPASS Technology Corp.** the test report shall not be reproduced except in full.
- The test report must not be used by the clients to claim product certification approval by **NVLAP** or any agency of the Government.



Contents

1. Summary of Test Procedure and Test Result	5
2. Test Configuration of Equipment under Test.....	6
2.1. Feature of Equipment under Test	6
2.2. Test Manner.....	6
2.3. Description of Support Unit	7
2.4. General Information of Test	8
2.5. Measurement Uncertainty	8
3. Test of Conducted Emission	9
3.1. Test Limit	9
3.2. Test Procedures.....	9
3.3. Typical test Setup	10
3.4. Measurement equipment.....	10
3.5. Test Result and Data	11
4. Test of Radiated Emission.....	13
4.1. Test Limit	13
4.2. Test Procedures.....	14
4.3. Typical test Setup	14
4.4. Measurement equipment.....	15
4.5. Test Result and Data	16

[illegible]



FCC TEST REPORT

According to

47 CFR, Part 2, Part 15 and CISPR PUB. 22

Applicant	: LG Electronics USA
Address	: 1000 Sylvan Avenue Englewood Cliffs New Jersey United States
Manufacturer	: Hewlett-Packard Company.
Address	: 11445 Compaq Center Drive West Houston, TX 77070, U.S.A.
Equipment	: LCD Monitor
Model No.	: HSTND-3251-L
FCC ID	: BEJHSTND-3251-L

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 – 2003** and the energy emitted by this equipment was **passed CISPR PUB. 22 and FCC Part 15** in both radiated and conducted emission class B limits. Testing was carried out on Aug 26, 2011 at **CerpPASS Technology Corp.**

Documented By:

Sugar Yu/ Administration

Approved By:

Miro Chueh / Technical director



1. Summary of Test Procedure and Test Result

Test Item	Normative References	Test Result
Conducted Emission	ANSI C63.4-2003 FCC Part 15 Subpart B	PASS
Radiated Emission	ANSI C63.4-2003 FCC Part 15 Subpart B	PASS



2. Test Configuration of Equipment under Test

2.1. Feature of Equipment under Test

LCD Monitor	Model No:	HSTND-3251-L
VGA Cable	Shielded, 1.5m	
Power Supply cable	Non-Shielded, 1.8m	

2.2. Test Manner

Test Software	
a	During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
b	The complete test system included the PC, USB Keyboard, USB Mouse, Printer and EUT for EMI test.
c	During the test, setup up the EUT and all system, turn on the power of all Equipments, run the EMC test software "H", set the contrast control to maximum, set the brightness control to maximum, use white letters on a black background to represent all colors, make the EUT at the test mode and it is normal operation, and then test.
The pre-test modes	
	Test Mode 1: Full system (VGA mode 1366*768@60Hz)
	Test Mode 2: Full system (VGA mode 800*600@75Hz)
	Test Mode 3: Full system (VGA mode 720*400@70Hz)
Select the worst case of the pre-test modes as the final test mode	
	Test Mode 1: Full system (VGA mode 1366*768@60Hz)



2.3. Description of Support Unit

No	Device	Manufacturer	Model No.	Description
1	PC	Dell	DCSM	N/A
2	USB Keyboard	DELL	SK-8115	N/A
3	USB Mouse	DELL	G0K02XYK	N/A
4	Printer	Epson	EX3	N/A

No	Cable	Quantity	Description
A	VGA Cable	1	Shielded, 1.5m
B	Parallel Cable	1	Shielded, 2.0m
C	USB Cable	1	Shielded, 1.8m, with one ferrite core bonded
D	USB Cable	1	Shielded, 1.5m



2.4. General Information of Test

Test Site:	CerpPASS Technology Corp.
Performand Location :	No.66,Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China
NVLAP LAB Code :	200814-0
FCC Registration Number :	916572, 331395
IC Registration Number :	7290A-1, 7290A-2
VCCI Registration Number :	T-1945 for Telecommunication Test C-2919 for Conducted emission test R-2670 for Radiated emission test below 1GHz G-227 for Radiated emission test above 1GHz
Frequency Range Investigated :	Conducted Emission Test: from 150kHz to 30 MHz Radiated Emission Test: from 30 MHz to 1,000 MHz Radiated Emission Test: from 1GHz to 18GHz
Test Distance :	The test distance of radiated emission below 1GHz from antenna to EUT is 3 M. The test distance of radiated emission above 1GHz from antenna to EUT is 3 M.

LABORATORY ACCREDITATION



2.5. Measurement Uncertainty

Conducted Emission		
The measurement uncertainty is evaluated as ± 2.71 dB.		
Radiated Emission		
(30MHz -1000MHz)	Horizontal	The measurement uncertainty is evaluated as ± 3.59 dB.
	Vertical	The measurement uncertainty is evaluated as ± 3.89 dB
(1G-18GHz)	Horizontal	The measurement uncertainty is evaluated as ± 2.31 dB.
	Vertical	The measurement uncertainty is evaluated as ± 2.15 dB.



3. Test of Conducted Emission

3.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

3.2. Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



3.3. Typical test Setup

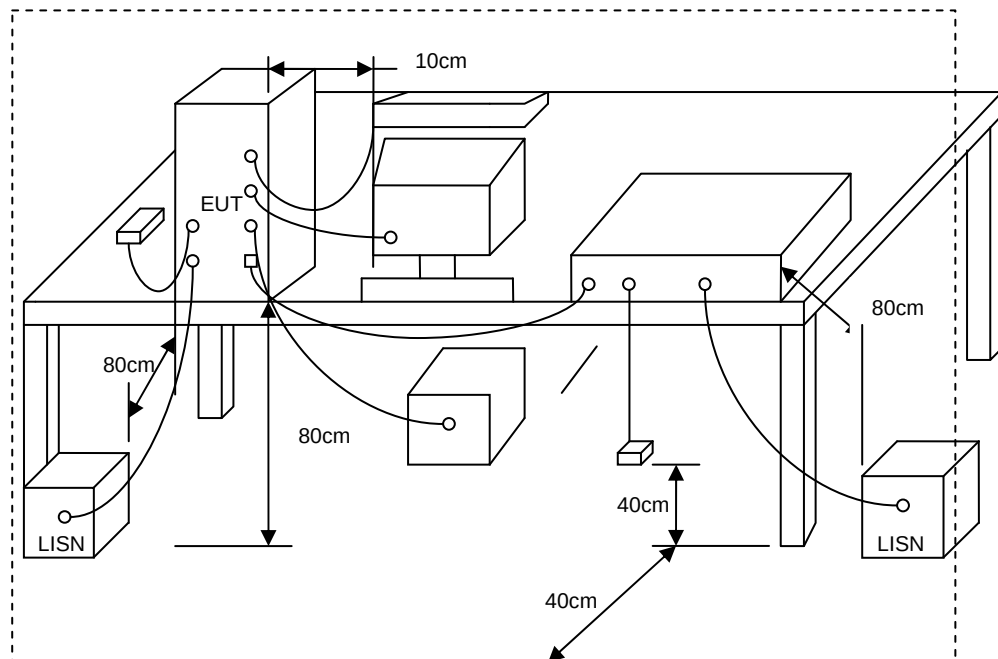


3.4. Measurement equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date
Test Receiver	R&S	ESCI	100565	2011.01.15
AMN	R&S	ESH2-Z5	100182	2011.03.14
Two-Line V-Network	R&S	ENV216	100325	2011.03.14
ISN	FCC	FCC-TLISN-T2-02	20379	2011.03.14
ISN	FCC	FCC-TLISN-T4-02	20380	2011.03.14
ISN	FCC	FCC-TLISN-T8-02	20381	2011.03.14
Current Probe	R&S	EZ-17	100303	2011.03.14
Passive Voltage Probe	R&S	ESH2-Z3	100026	2011.03.14
Attenuator	R&S	ESH3-Z2	100529	2011.01.11
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2011.08.14



3.5. Test Result and Data

Test Mode :	Mode 1: Full system (VGA mode 1366*768@60Hz)		
AC Power :	AC 120V/60Hz	Phase :	L
Temperature :	22°C	Humidity :	51%
Pressur(mbar) :	1002	Date :	2011/08/24

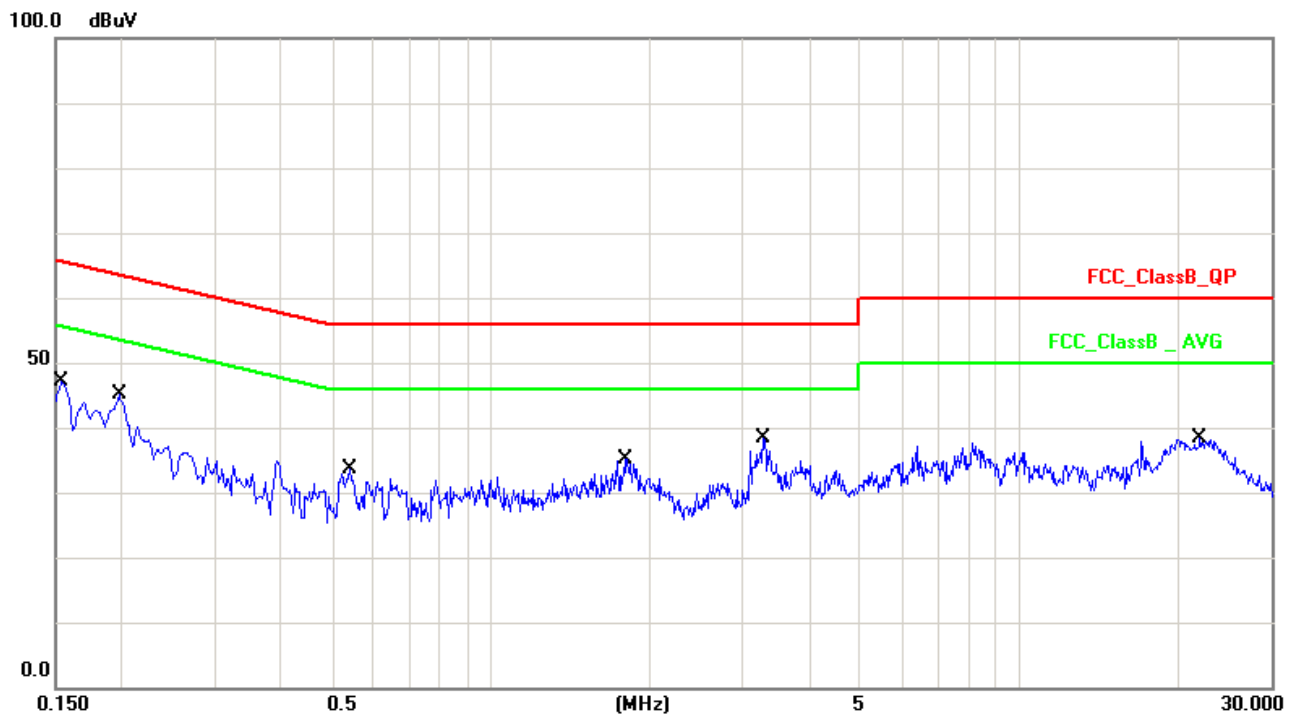


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1540	19.87	16.58	36.45	65.78	-29.33	QP
2	0.1540	19.87	0.04	19.91	55.78	-35.87	AVG
3	0.1980	19.87	22.63	42.50	63.69	-21.19	QP
4	0.1980	19.87	20.22	40.09	53.69	-13.60	AVG
5	0.5420	19.85	8.10	27.95	56.00	-28.05	QP
6	0.5420	19.85	2.09	21.94	46.00	-24.06	AVG
7	1.7940	19.72	8.72	28.44	56.00	-27.56	QP
8	1.7940	19.72	1.82	21.54	46.00	-24.46	AVG
9	3.2900	19.71	10.86	30.57	56.00	-25.43	QP
10	3.2900	19.71	0.69	20.40	46.00	-25.60	AVG
11	22.0020	19.56	12.20	31.76	60.00	-28.24	QP
12	22.0020	19.56	5.80	25.36	50.00	-24.64	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 1: Full system (VGA mode 1366*768@60Hz)		
AC Power :	AC 120V/60Hz	Phase :	N
Temperature :	22°C	Humidity :	51%
Pressur(mbar) :	1002	Date :	2011/08/24

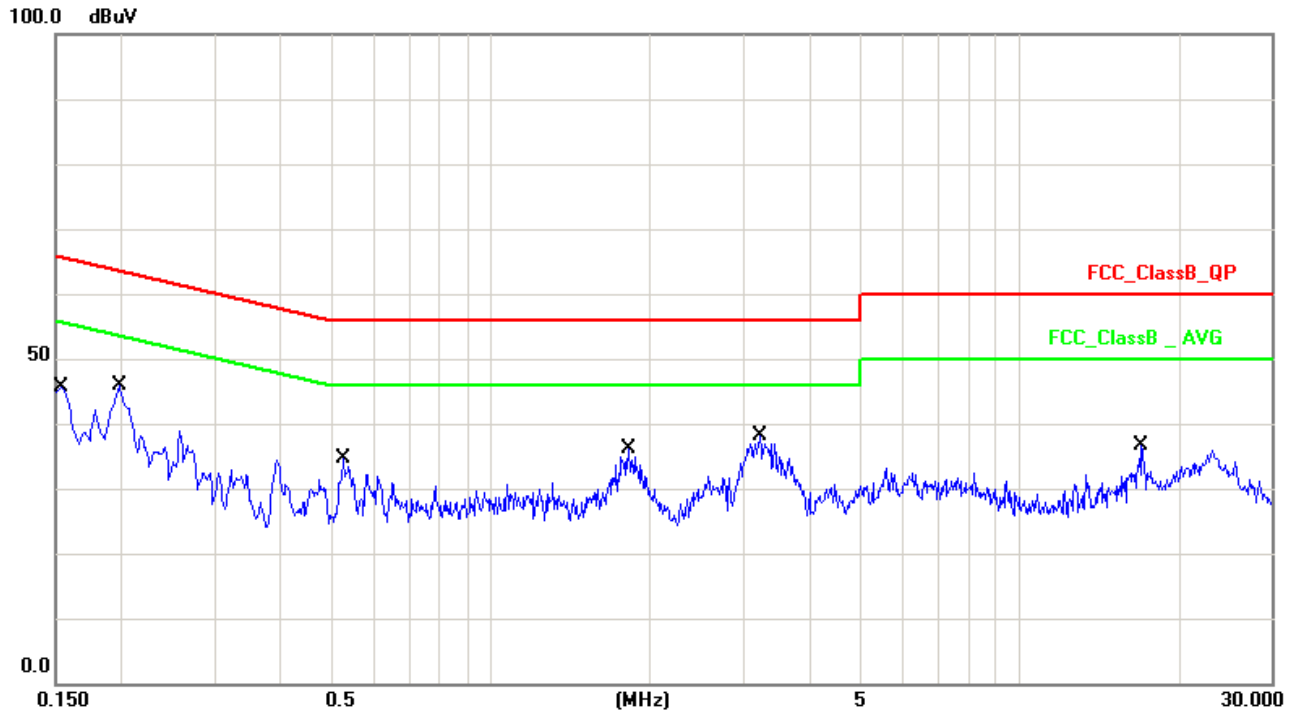

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1540	19.50	15.58	35.08	65.78	-30.70	QP
2	0.1540	19.50	-0.24	19.26	55.78	-36.52	AVG
3	0.1980	19.50	22.69	42.19	63.69	-21.50	QP
4	0.1980	19.50	18.92	38.42	53.69	-15.27	AVG
5	0.5260	19.50	8.61	28.11	56.00	-27.89	QP
6	0.5260	19.50	3.26	22.76	46.00	-23.24	AVG
7	1.8220	19.50	8.67	28.17	56.00	-27.83	QP
8	1.8220	19.50	2.63	22.13	46.00	-23.87	AVG
9	3.2380	19.56	11.63	31.19	56.00	-24.81	QP
10	3.2380	19.56	1.38	20.94	46.00	-25.06	AVG
11	17.0820	19.94	15.80	35.74	60.00	-24.26	QP
12	17.0820	19.94	9.63	29.57	50.00	-20.43	AVG

Note: Measurement Level = Reading Level + Correct Factor

Test engineer: Seben



4. Test of Radiated Emission

4.1. Test Limit

Radiated emissions from 30 MHz to 1,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-2003. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 3.2. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (m)	Level (dBuV/m)	Level (dBuV/m)
30 - 88	3	40(QP)	N/A
88 - 216	3	43(QP)	N/A
216-960	3	46(QP)	N/A
960-1000	3	54(QP)	N/A
1000-18000	3	74(PK)	54(AV)

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the below table.

Frequency (MHz)	Distance Meters	Radiated (dB μ V/ M)
30-230	10	30
230-1000	10	37




4.2. Test Procedures

- The EUT was placed on a Rota table top 0.8 meter above ground.
- The EUT and its simulators are placed on the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
- The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.
- Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated on radiated measurement.
- Radiated emissions were investigated over the frequency range from 30MHz to 1GHz using a receiver bandwidth of 120KHz and the frequency range from 1GHz to 18GHz using a receiver bandwidth of 1MHz.


4.3. Typical test Setup

Below 1GHz Test Setup

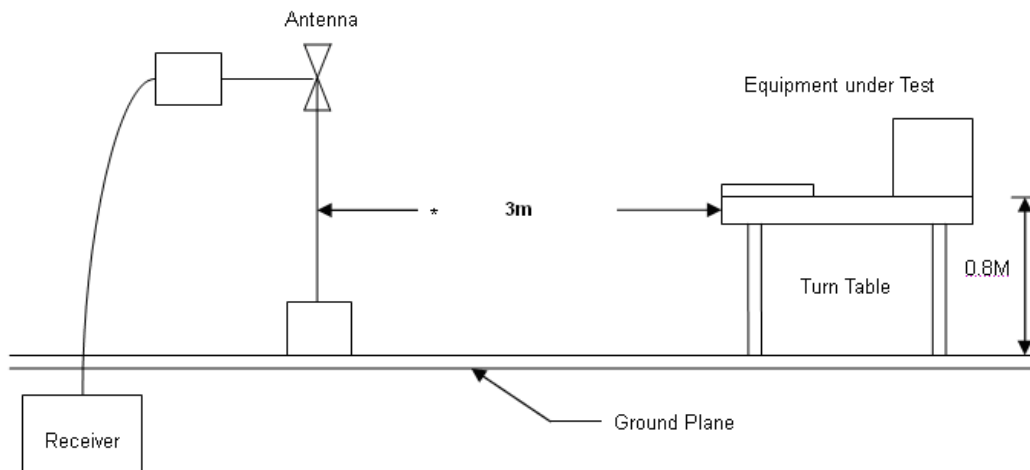



Above 1GHz Test Setup

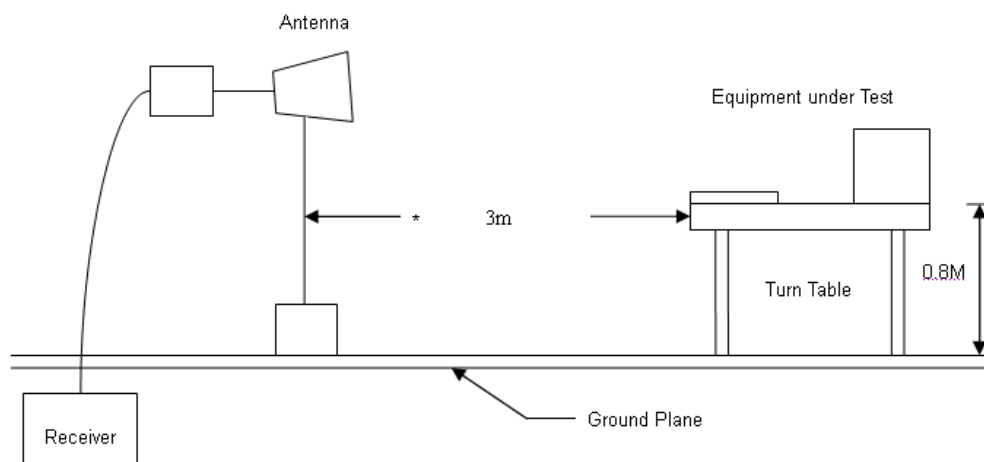

4.4. Measurement equipment


Instrument	Model No.	Manufacturer	Serial No.	Calibration Date
EMI Test Receiver	R&S	ESCI	100563	2011.03.14
H64 Amplifier	HP	8447F	3113A05582	2011.08.14
Preamplifier	Agilent	8449B	3008A02342	2011.02.10
Ultra Broadband Antenna	R&S	HL562	100363	2011.05.07
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-619	2011.05.07
Spectrum Analyzer	R&S	FSP40	100324	2011.08.14
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-002	2011.08.17



4.5. Test Result and Data

Under 1G

Engineer : Seven	
Site : EMC Lab AC 102	Time : 2011/08/26 - 21: 43:06
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : LCD Monitor	Probe : HL562(30-1000MHz) - HORIZONTAL
Power : AC 120V/60Hz	Note : Mode 1: Full system (VGA mode 1366*768@60Hz)

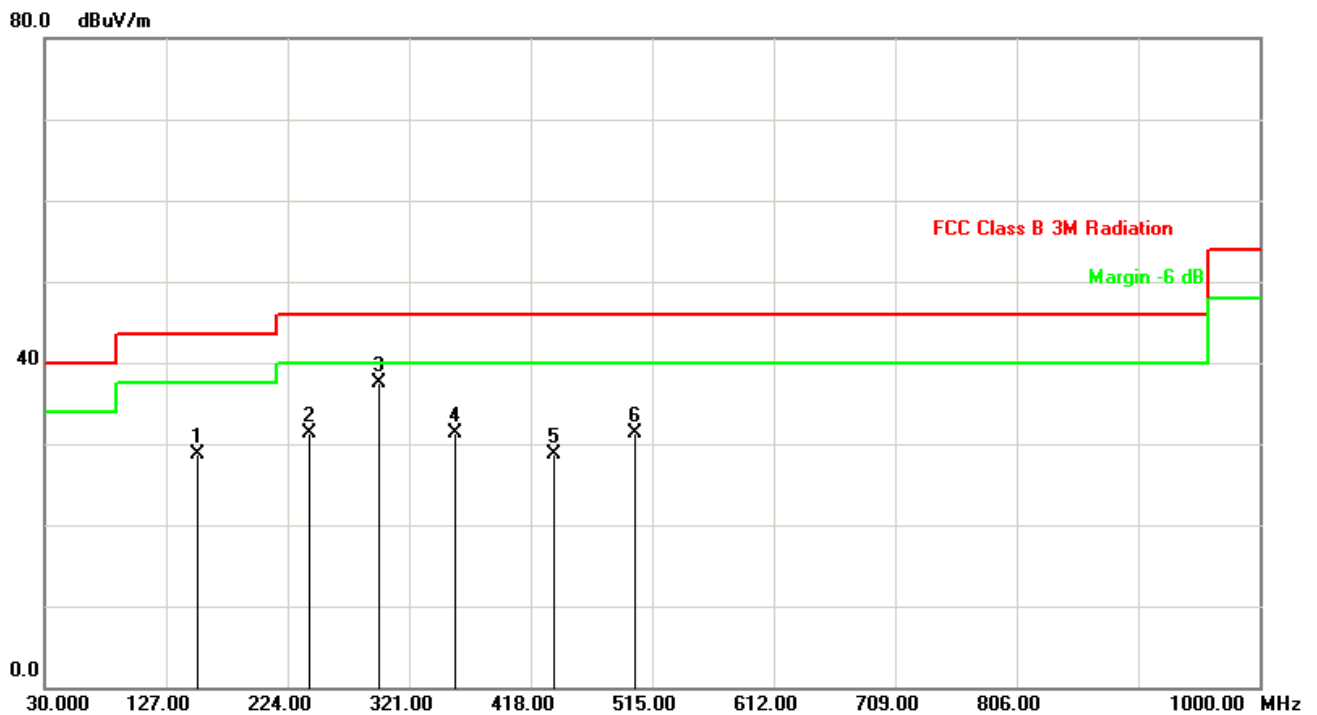


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	152.3200	-15.47	44.09	28.62	43.50	-14.88	QP	204	47
2	241.2700	-13.08	44.35	31.27	46.00	-14.73	QP	391	79
3	296.8400	-11.02	48.53	37.51	46.00	-8.49	QP	215	186
4	358.3200	-8.92	40.17	31.25	46.00	-14.75	QP	386	348
5	436.3200	-6.56	35.21	28.65	46.00	-17.35	QP	312	75
6	501.8900	-4.78	36.03	31.25	46.00	-14.75	QP	221	93

Note: Measurement Level = Reading Level + Correct Factor



Engineer : Seven	
Site : EMC Lab AC 102	Time : 2011/08/26 - 21:43:06
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : LCD Monitor	Probe : HL562(30-1000MHz) - VERTICAL
Power : AC 120V/60Hz	Note : Mode 1: Full system (VGA mode 1366*768@60Hz)

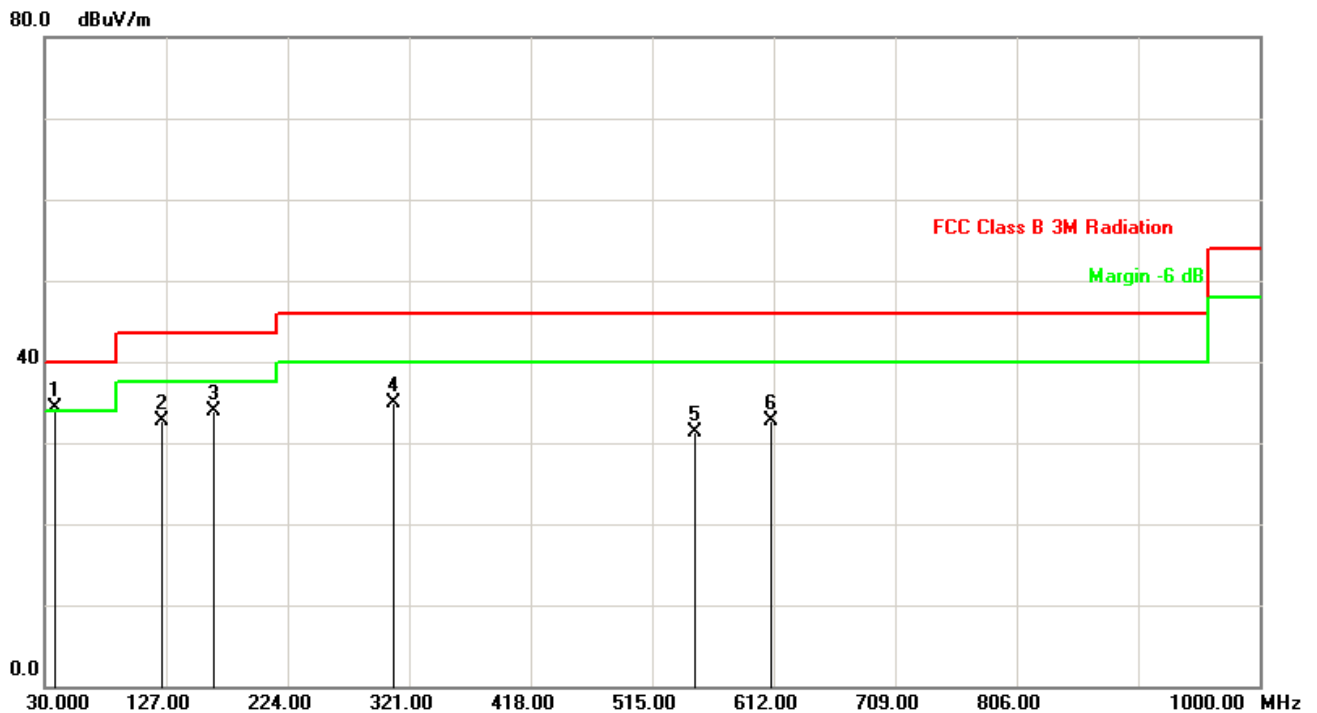


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	38.6200	-10.58	44.83	34.25	40.00	-5.75	QP	113	45
2	123.6500	-13.92	46.60	32.68	43.50	-10.82	QP	102	168
3	165.6200	-15.25	49.20	33.95	43.50	-9.55	QP	200	76
4	308.9500	-10.60	45.47	34.87	46.00	-11.13	QP	231	352
5	549.3200	-3.75	34.99	31.24	46.00	-14.76	QP	107	79
6	609.6200	-2.45	35.07	32.62	46.00	-13.38	QP	123	283

Note: Measurement Level = Reading Level + Correct Factor



Above 1G

Engineer : Seven	
Site : EMC Lab AC 102	Time : 2011/08/26 - 12:20:21
Limit : FCC_15_03M_PK/ AV	Margin : 6
EUT : LCD Monitor	Probe : BBHA9120D(1-18GHz) - HORIZONTAL
Power : AC 120V/60Hz	Note : Mode 1: Full system (VGA mode 1366*768@60Hz)

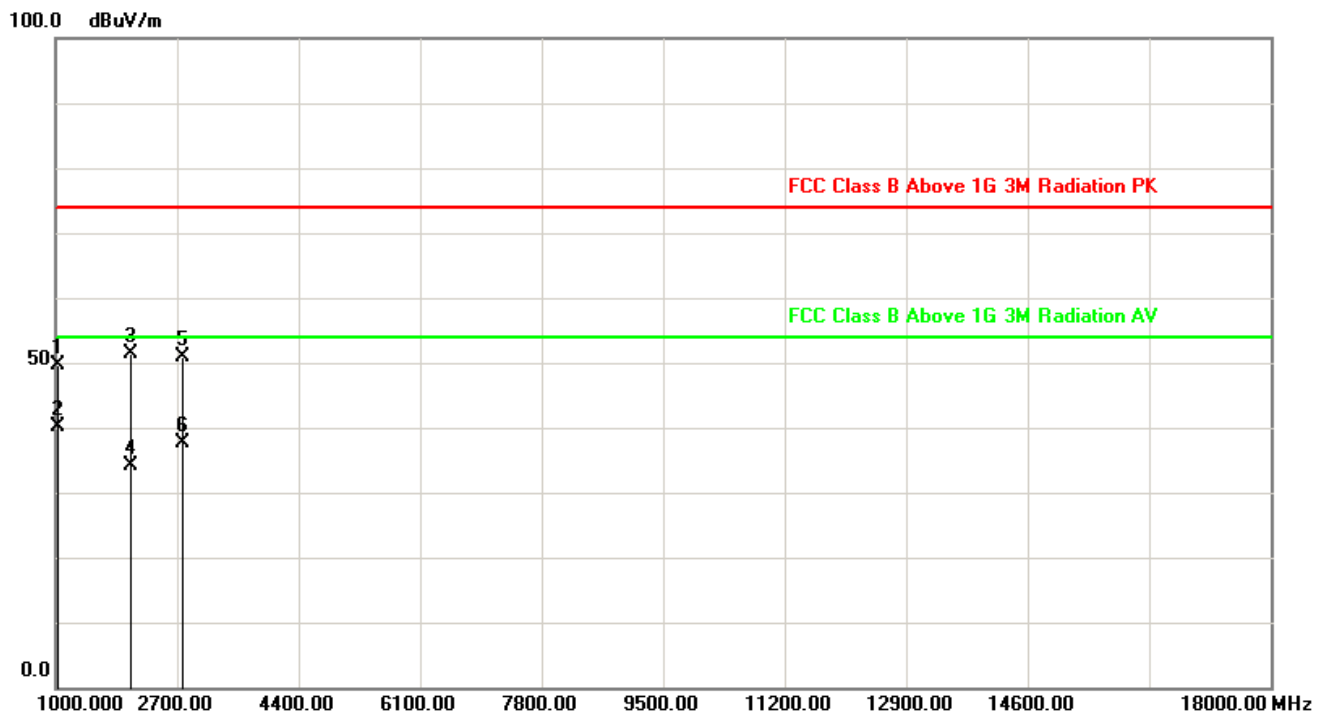


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1035.320	-16.28	65.90	49.62	74.00	-24.38	peak	213	73
2	1035.320	-16.28	56.53	40.25	54.00	-13.75	AVG	213	73
3	2046.320	-13.68	64.94	51.26	74.00	-22.74	peak	389	185
4	2046.320	-13.68	47.89	34.21	54.00	-19.79	AVG	389	185
5	2774.840	-10.89	61.76	50.87	74.00	-23.13	peak	195	249
6	2774.840	-10.89	48.51	37.62	54.00	-16.38	AVG	195	249

Note: Measurement Level = Reading Level + Correct Factor



Engineer : Seven	
Site : EMC Lab AC 102	Time : 2011/08/26 - 12:20:21
Limit : FCC_15_03M_PK/AV	Margin : 6
EUT : LCD Monitor	Probe : BBHA9120D(1-18GHz) - VERTICAL
Power : AC 120V/60Hz	Note : Mode 1: Full system (VGA mode 1366*768@60Hz)

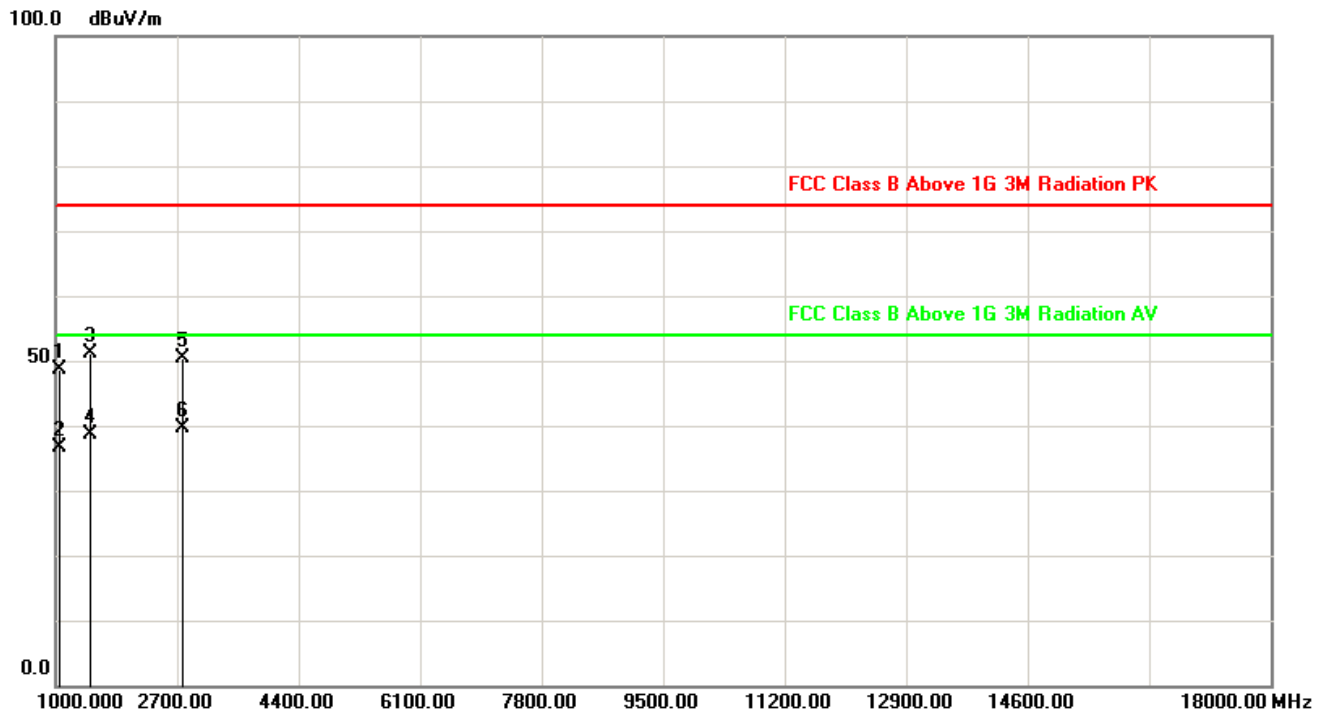

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	1046.530	-16.26	64.88	48.62	74.00	-25.38	peak	110	318
2	1046.530	-16.26	52.91	36.65	54.00	-17.35	AVG	110	318
3	1482.320	-15.18	66.42	51.24	74.00	-22.76	peak	221	65
4	1482.320	-15.18	53.83	38.65	54.00	-15.35	AVG	221	65
5	2783.250	-10.87	61.25	50.38	74.00	-23.62	peak	107	254
6	2783.250	-10.87	50.54	39.67	54.00	-14.33	AVG	107	254

Note: Measurement Level = Reading Level + Correct Factor

Test engineer: Seven