



HCT CO., LTD.

PRODUCT COMPLIANCE DIVISION

105-1, JANGAM-RI, MAJANG-MYEON, ICHEON-SI, KYOUNGKI-DO, REPUBLIC OF KOREA

TEL: +82 31 645 6300 FAX: +82 31 645 6401 www.hct.co.kr

EMI CERTIFICATION REPORT

Applicant:

LG Electronics Inc.

60-39, Gasan-dong, Gumchon-gu, Seoul
153-023, Korea

Date of Issue: April 29, 2011

Test Report No.: HCTE1104FE63

Test Site: HCT CO., LTD.

HCT FRN: 0005-8664-21

FCC ID:

IC:


**BEJP990HN
2703C-P990HN**


Rule Part(s) / Standard(s) : FCC PART 15 Subpart B Class B
FCC Listing No : 90661
IC Recognition No : IC 5944A-3
Equipment Type : Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSPA phone with
Bluetooth and WLAN
Trade Name : LG Electronics Inc
Model(s) : LG-P990hN
Additional Model(s) : P990hN, LGP990hN
Port / Connector(s) : USB Data Port / Headset Port / HDMI Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862


Report prepared by
: Doo Hwan Ryu
Test Engineer of EMC Team


Approved by
: Sang Jun Lee
Manager of EMC Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	
1.1 Product description	3
1.2 Related submittal(s)/Grant(s)	3
1.3 Tested system details	4
1.4 Cable description	5
1.5 Noise suppression parts on cable. (I/O cable)	5
1.6 Test methodology	6
1.7 Test facility	6
1.8 Frequency Range of Radiated Measurements	6
2. SYSTEM TEST CONFIGURATION	
2.1 Configuration of tested system	7
3. PRELIMINARY TEST	
3.1 Conducted Emission test	8
3.2 Radiated Emission test	8
4. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY	
4.1 Conducted Emission test	9
4.2 Radiated Emission test	14
5. FIELD STRENGTH CALCULATION	15
6. TEST EQUIPMENT	16
7. CONCLUSION	17

ATTACHMENT: TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product Description

Equipment Under Test (E.U.T) is **EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA /HSPA phone with Bluetooth & WLAN, Model: LG-P990hN** manufactured by **LG Electronics Inc.** Its basic purpose is used for communications.

Model (s)	LG-P990hN
Additional Model (s)	P990hN, LGP990hN
FCC ID	BEJP990HN
IC	2703C-P990HN
E.U.T Type	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSPA phone with Bluetooth &WLAN
TX Frequency	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 826.40 MHz to 846.60 MHz (WCDMA 850) 1 852.4 MHz to 1 907.6 MHz (WCDMA 1 900)
RX Frequency	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 871.40 MHz to 891.60 MHz (WCDMA 850) 1 932.4 MHz to 1 987.6 MHz (WCDMA 1 900)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Number	FCC ID / DoC	Connected To
Cellular/PCS GSM/GPRS /EDGE/WCDMA/ HSPA phone with Bluetooth & WLAN	LG	LG-P990hN	BEJP990HN	Notebook PC TV Monitor
TV Monitor	LG	W2261VT	-	E.U.T
Notebook PC	LG	X140-02	DoC	E.U.T Notebook PC adaptor
Notebook PC adaptor	DELTA (JIANG SU)	ADP-40PH AD	-	Notebook PC
Mouse	Microsoft	Intellimouse optical USB and PS/2 compatible	DoC	Notebook PC
SD card (4 GB)	SKY	-	-	E.U.T
USB cable	BROAD	SGDY0017903	-	E.U.T Notebook PC
Headset	CRESYN	SGEY0007612	-	E.U.T
HDMI cable	KSD	EAD61668801	-	E.U.T TV Monitor

1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
Cellular/PCS GSM/ GPRS/EDGE/ WCDMA/HSPA phone with Bluetooth & WLAN	Headset jack	-	N	(D)1.2
	USB data	Y	Y	(P,D)1.2
	HDMI	-	Y	(D)2.0
Notebook PC	USB (Mouse)	-	Y	(D)1.8
TV Monitor	AC in	N	-	(P)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Cellular/PCS GSM/ GPRS/EDGE/ WCDMA/HSPA phone with Bluetooth & WLAN	Headset jack	N	-	Y	E.U.T End
	USB data	N	-	Y	Both End
	HDMI	N	-	Y	Both End
Notebook PC	USB (Mouse)	Y	Notebook PC End	Y	Notebook PC End

1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

1.7 Test Facility

The 10 m semi anechoic chamber used to collect the radiated data is located at the 105-1, Jangam-Ri, Majang-Myeon, Icheon-Si Kyongki-Do, 467-811, Republic of Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facilities was submitted to the Commission and accepted dated Sep. 03, 2010 (Registration Number: 90661)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System

- Power Line Conducted test : E.U.T was connected to LISN via Notebook PC adaptor.
Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.
- Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m semi-anechoic chamber.

[Configuration of Tested System]

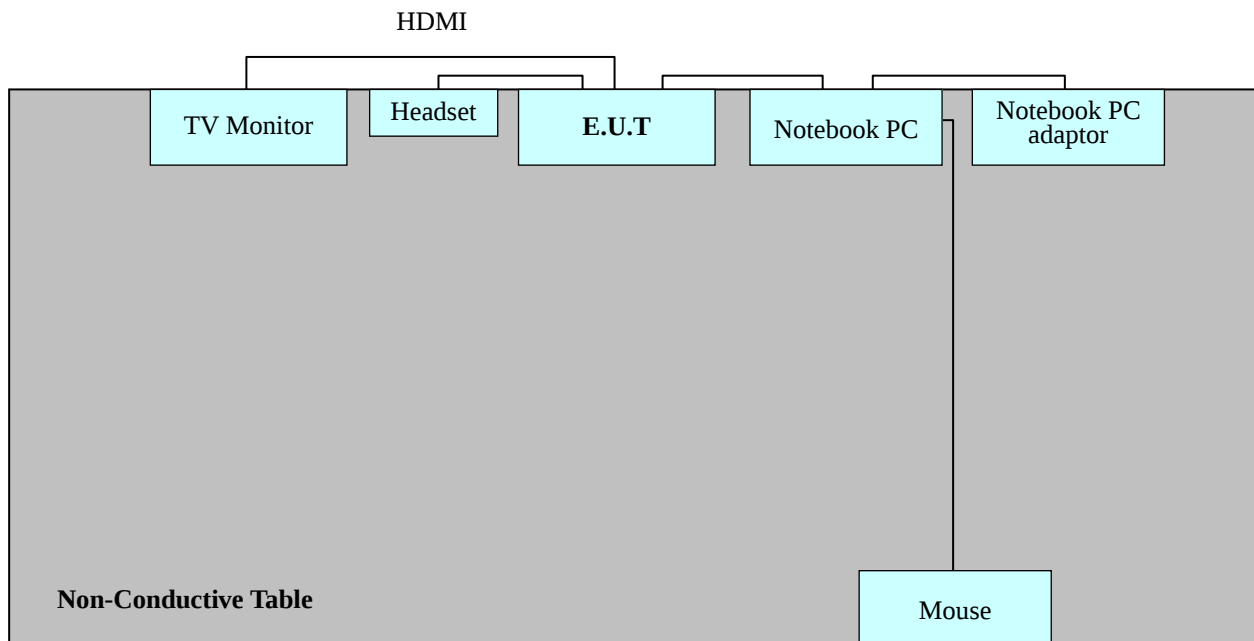

3. PRELIMINARY TEST

3.1 Conducted Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode	The Worst Operating Condition
Data Communication	○

3. 2 Radiated Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode	The Worst Operating Condition
Data Communication	○

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit apply to	: FCC PART 15 Subpart B Class B
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Temperature	: 21.3 °C
Humidity level	: 41.0 %
Test date	: April 15, 2011

※ **NOTE:** Refer to page 10 to page 13 for details.


HCT

EMC

EUT: LG-P990hN
Manufacturer: LG
Operating Condition: DATA MODE
Test Site: SHIELD ROOM
Operator: DH-RYU
Test Specification: FCC PART 15 CLASS B
Comment: H

SCAN TABLE: "FCC PART 15 CLASS B"

Short Description:			FCC PART 15 CLASS B			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

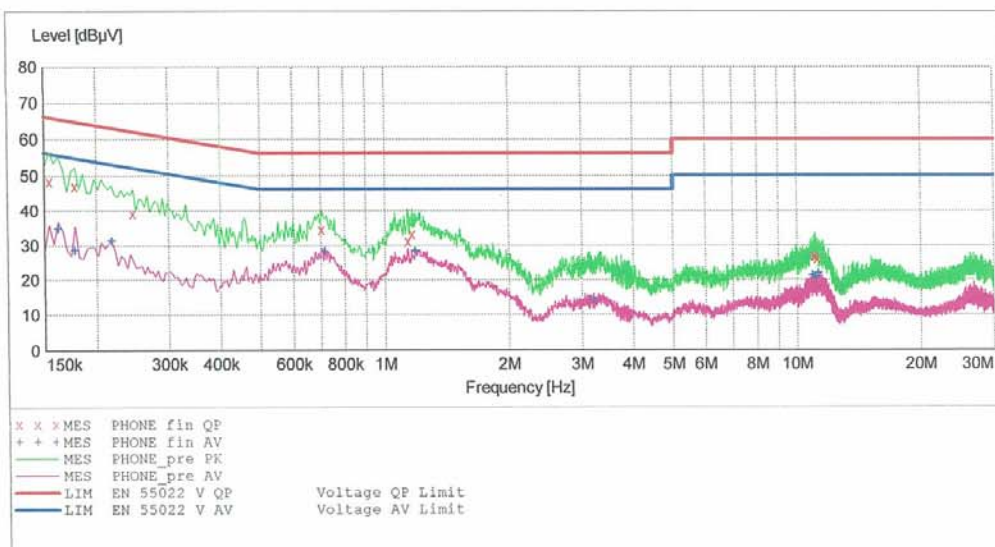

MEASUREMENT RESULT: "PHONE_fin QP"

4/15/2011 11:04AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.154010	48.20	10.3	66	17.5	---	---
0.178010	46.80	10.3	65	17.7	---	---
0.246010	39.10	10.3	62	22.8	---	---
0.704000	34.50	10.4	56	21.5	---	---
1.140000	31.10	10.4	56	24.9	---	---
1.168000	33.20	10.4	56	22.8	---	---
10.984000	26.80	11.1	60	33.2	---	---
11.056000	26.80	11.1	60	33.2	---	---
11.184000	26.10	11.1	60	33.9	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

4/15/2011 11:04AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.162010	34.60	10.3	55	20.7	---	---
0.178010	28.40	10.3	55	26.1	---	---
0.218010	31.10	10.3	53	21.8	---	---
0.716000	28.10	10.4	46	17.9	---	---
1.188000	28.30	10.4	46	17.7	---	---
3.204000	14.10	10.5	46	31.9	---	---
10.916000	21.30	11.1	50	28.7	---	---
11.132000	20.70	11.1	50	29.3	---	---
11.272000	21.80	11.1	50	28.2	---	---


HCT

EMC

EUT: LG-P990hN
Manufacturer: LG
Operating Condition: DATA MODE
Test Site: SHIELD ROOM
Operator: DH-RYU
Test Specification: FCC PART 15 CLASS B
Comment: N

SCAN TABLE: "FCC PART 15 CLASS B"

Short Description:			FCC PART 15 CLASS B			
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

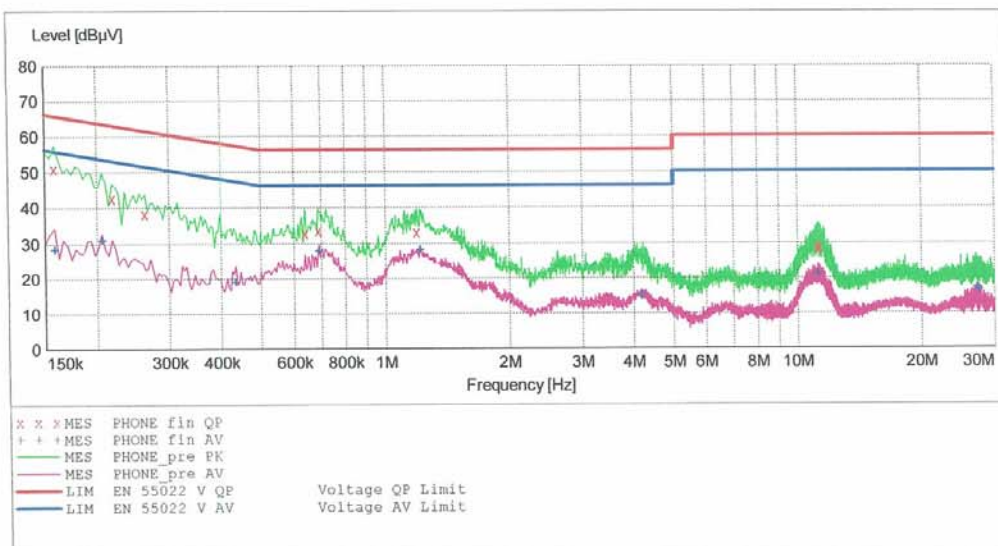

MEASUREMENT RESULT: "PHONE_fin QP"

4/15/2011 11:11AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.158010	50.80	10.3	66	14.8	---	---
0.218010	42.60	10.3	63	20.3	---	---
0.262010	38.10	10.3	61	23.2	---	---
0.640000	32.70	10.3	56	23.3	---	---
0.688000	33.50	10.4	56	22.5	---	---
1.192000	33.10	10.4	56	22.9	---	---
11.200000	28.20	11.1	60	31.8	---	---
11.260000	28.90	11.1	60	31.1	---	---
11.320000	28.60	11.1	60	31.4	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

4/15/2011 11:11AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.158010	28.30	10.3	56	27.3	---	---
0.206010	30.90	10.3	53	22.4	---	---
0.434010	18.90	10.3	47	28.3	---	---
0.692000	27.80	10.4	46	18.2	---	---
1.216000	28.10	10.4	46	17.9	---	---
4.192000	15.00	10.6	46	31.0	---	---
11.232000	21.10	11.1	50	28.9	---	---
27.308000	17.10	11.8	50	32.9	---	---
27.524000	16.40	11.9	50	33.6	---	---

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Limit Apply to : FCC PART 15 Subpart B Class B
For measurement below 1 GHz
-Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)
For measurement above 1 GHz
-Setting : Peak mode: Detector- Peak(RBW: 1 MHz / VBW: 1 MHz)
Average mode: Detector- Peak (RBW: 1 MHz / VBW: 10 Hz)
Temperature : 23.1 °C
Humidity Level : 46.3%
Test Date : April 26, 2011

Frequency	Reading	Ant. Factor	Cable Loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB/m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
36.5	13.1	11.8	0.8	V	25.7	40.0	14.3
130.8	12.6	11.9	1.4	V	25.9	43.5	17.6
166.0	18.4	12.9	1.6	V	32.9	43.5	10.6
190.5	18.9	10.5	1.8	H	31.2	43.5	12.3
216.0	20.9	10.2	1.8	H	32.9	43.5	10.6
315.0	19.7	13.5	2.3	V	35.5	46.0	10.5

※ NOTE:

1. Measurement above 1 GHz performed from 1 GHz to the 5th harmonic of highest fundamental frequency. The highest fundamental frequency is GSM 1 900 center frequency.
2. For measurement above 1 GHz, noise level is more than 14 dB below the limit, specified in FCC Part 15.35.

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Number</u>	<u>Serial Number</u>	<u>Next CAL Date</u>
-------------	---------------------	---------------------	----------------------	----------------------

Conducted Emission

☒ EMI Test Receiver	Rohde & Schwarz	ESCI	100584	2011.05.28
☒ LISN	Rohde & Schwarz	ESH3-Z5	100282	2012.02.01
☒ LISN	Rohde & Schwarz	ENV216	100073	2012.04.01
☒ Attenuator	Rohde & Schwarz	ESH3-Z2	375.8810.352	2011.10.25

Radiated Emission

☐ EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	2011.10.29
☒ EMI Test Receiver	Rohde & Schwarz	ESU26	100241	2011.09.01
☒ Trilog Antenna	Schwarzbeck	VULB9160	3301	2012.09.13
☒ Antenna master	INNCO Systems	MA4000-EP	MA4000/283	-
☒ Turn Table	INNCO Systems	DT3000-3T	DT3000/69	-
☒ Communication Antenna	Schwarzbeck	USLP9142	9142-248	-
☒ Horn Antenna	Schwarzbeck	BBHA 9120D	-	2012.04.13
☐ RF-Amplifier	MITEQ	AMF-6D-0010 1800-35.20P.PS	-	2011.05.20
☐ Base Station	Rohde & Schwarz	CMU 200	1100000802	2012.02.16

7. CONCLUSION

The data collected shows that the **EUT Type: Cellular/PCS GSM/GPRS/EDGE /WCDMA/ HSPA Phone with Bluetooth and WLAN, Model: LG-P990hN, FCC ID: BEJP990HN** complies with §15.107 and §15.109 of the FCC rules.

IC Model: LG-P990hN, IC: 2703C-P990HN complies with ICES-003 Issue 4 of the IC rule.