

391-2 Gaeumjeong - Dong, Changwon City,  
Gyeongnam, Korea 641-711

REPORT of MEASUREMENT  
of ELECTROMAGNETIC INTERFERENCE TESTING

Issued: January 27,1999

1. Name of Applicant: LG Electronics Inc.
2. Address of Applicant: 6133 North River Road Suite, 1100 (Riverway Plaza) Rosemont, IL 60018
3. Equipment Under Test: LG Electronics Inc., Microwave Oven Model MS-144YD  
with Magnetron Type **2M246** by LG Electronics Inc..
4. Power Supply: 120 V ac, 60 Hz
5. Test Requirements: CFR Title 47, Part 18
6. Test Procedure: OST MP-5
7. Instrument Used: Hioki Digital Power High Test Model 3181-01  
Holaday Industries Inc. Microwave Survey Meter Model 1700  
Electro Metrics Field Intensity Meter Model EMC-30 MKIV  
Electro Metrics Field Intensity Meter Model EMC-60 MKIV  
Electro Metrics Metering Module CRM-30  
Hewlett Packard Frequency Counter 5350A  
Hewlett Packard Sweep Oscillator 8350B
8. Test Condition: The Equipment Under Test (EUT) was tested while operating at maximum  
RF output power. Loads of water in a glass beaker was used in amount specified by  
Test Procedure.

FCC ID : BEJS141XF

Model MS-144YD with Toshiba Magnetron

9. Results of Testings:

A. Input Power

Input Power was measured using a Wattmeter.

A 275 ml water load was placed in the center of the oven and the oven was operated at full output power for 6 minutes after which the reading was taken.

A 275 ml water load was chosen for its compatibility with the UL procedure used by manufacturers to determine our input ratings.

| <u>Voltage</u>  | <u>Current</u> | <u>Input Power</u> | <u>Manufacturer's Rating</u> |
|-----------------|----------------|--------------------|------------------------------|
| 120 V ac, 60 Hz | 14.58 A        | 1652 W             | 13.6 A                       |

B. RF Power Output

The Calorimetric Method was used to determine maximum output power.

A 1000 ml water load was placed in the center of the oven.

A mercury thermometer was used to measure temperature rise.

| <u>Quantity of Water</u> | <u>Starting Temperature</u> | <u>Final Temperature</u> | <u>Elapsed Time</u> |
|--------------------------|-----------------------------|--------------------------|---------------------|
| 1000 ml                  | 19.2 °C                     | 44.0 °C                  | 120 Sec             |

$$\text{Power (W)} = \frac{(4.2 \text{ Joules/Cal}) \times (\text{Volume in ml}) \times (\text{Temperature Rise})}{\text{Time in Seconds}}$$

$$\text{Power (W)} = \frac{4.2 \times 1000 \times 24.8}{120}$$

$$\text{Power (W)} = 868 \text{ Watts}$$

FCC ID : BEJS141XF

Model MS-144YD with Toshiba Magnetron

### C. Frequency Measurements

The fundamental operating frequency was measured with a substitution method using the Electro Metrics receiver, Hewlett Packard Sweep Oscillator and Frequency Counter.

The receiver was turned to the maximum amplitude at the oven operating frequency.

The Sweep Oscillator was substituted for operating the antenna and turned to the same frequency as the receiver. The frequency of the generator was determined using the frequency counter.

The frequency was observed over a period of time, and with line voltage variation.

The maximum frequency permitted in Part 18 is maximum 2.500 GHz and the minimum 2.400 GHz.

No out-of-band frequency measurement was observed.

Variation of Frequency With Time (1000 ml reduced to 200 ml)

Maximum Frequency Observed: 2.468GHz

Minimum Frequency Observed: 2.438 GHz

Variation of Frequency With Line Voltage (96 Volts to 150 Volts AC)

Maximum Frequency Observed: 2.444 GHz

Minimum Frequency Observed: 2.438 GHz

### D. Microwave Leakage

Radiation leakage was measured in the as-received condition with the oven door closed using a microwave leakage meter.

No power greater than 0.15 mW/cm square was observed at any location on the enclosure of the oven.

A maximum of 1.0 mW/cm square is allowed in accordance with UL 923 standard.

Hence, microwave leakage in the as-received condition with the oven door closed, did not exceed the specified limit.

## E. Radiated Emissions

Radiated emission was measured over a frequency range of 100 MHz to 10 GHz. For measurements the EUT was get set up in an Shielded Anechoic Chamber. The EUT was supported by a wood table, 1 m high in both cases, measurement above 1 GHz and below 1 GHz.

The results of measurements above 1 GHz are shown on Data Page 1. Maximum readings were recorded after variations in antenna polarization, antenna height, EUT orientation, load location, and load volume. Readings were taken with the antenna 3 meters away from the EUT. Field intensity was then extrapolated to a 300 meters distance by multiplying by a factor of 0.01 as described in Section 2.2.6 of MP-5.

No over-limit radiated emissions were discovered.

The results of measurements below 1 GHz are found on Data Page 2 and 3. They represent horizontal and vertical antenna polarization at 3 meters respectively.

10. Test Engineer:



Mr. S. G. PARK

Reviewed By:



Mr. S. Y. KIM

FCC ID : BEJS141XF

Model MS-144YD with Toshiba Magnetron

# LABORATORY MEASUREMENTS ABOVE 1 GHz

Data Page 1

Date Tested: January 21, 1999

Equipment Under Test (EUT): Microwave Oven Model MS-144YD

Mode of Operating (DUT): Maximum RF Power

Test Requirements: CFR Title 47, Part 18

Test Equipment: Electro-Metrics FIM. EMC-60MKIV

Antenna: Double Ridged Guide Antenna RGA-180

Detector Mode: Average

Bandwidth: 1 MHz

Measurement Distance: 3 meters

| FREQ.<br>(GHz) | Antenna<br>Factor<br>(dB) | Cable<br>Factor<br>(dB) | Load<br>(ml) | Load<br>Locating | Meter<br>Reading<br>(dBμV) | Field<br>Intensity<br>@ 3 m<br>dBμV/m | Field<br>Intensity<br>@ 3 m<br>(μV/m) | Field<br>Intensity<br>@ 300 m<br>(μV/m) | FCC<br>Limit<br>@ 300 m<br>(μV/m) |
|----------------|---------------------------|-------------------------|--------------|------------------|----------------------------|---------------------------------------|---------------------------------------|-----------------------------------------|-----------------------------------|
| 2.39           | 29.4                      | 0.6                     | 700          | Center           | 19.7                       | 49.4                                  | 295.1                                 | 2.95                                    | 32.9                              |
| 2.51           | 29.6                      | 0.6                     | 700          | Center           | 14.4                       | 44.3                                  | 164.1                                 | 1.64                                    | 32.9                              |
| 4.90           | 34.4                      | 0.9                     | 700          | Center           | 24.3                       | 58.8                                  | 870.9                                 | 8.71                                    | 32.9                              |
| 4.90           | 34.4                      | 0.9                     | 700          | RF               | 23.6                       | 58.1                                  | 803.5                                 | 8.04                                    | 32.9                              |
| 4.90           | 34.4                      | 0.9                     | 300          | Center           | 23.5                       | 58.0                                  | 794.3                                 | 7.94                                    | 32.9                              |
| 4.90           | 34.4                      | 0.9                     | 300          | RF               | 24.6                       | 59.1                                  | 901.5                                 | 9.02                                    | 32.9                              |
| 7.35           | 36.8                      | 1.2                     | 700          | Center           | 23.2                       | 60.1                                  | 1011.6                                | 10.12                                   | 32.9                              |
| 7.35           | 36.8                      | 1.2                     | 700          | RF               | 23.1                       | 60.0                                  | 1000.0                                | 10.00                                   | 32.9                              |
| 7.35           | 36.8                      | 1.2                     | 300          | Center           | 23.3                       | 60.2                                  | 1023.3                                | 10.23                                   | 32.9                              |
| 7.35           | 36.8                      | 1.2                     | 300          | RF               | 24.5                       | 61.4                                  | 1174.9                                | 11.75                                   | 32.9                              |
| 9.80           | 38.0                      | 1.5                     | 700          | Center           | 18.1                       | 57.4                                  | 741.3                                 | 7.41                                    | 32.9                              |

Note: RF = Right Front Corner

FCC ID : BEJS141XF

Model MS-144YD with Toshiba Magnetron

LABORATORY MEASUREMENTS BELOW 1 GHz

Data Page 2

Date Tested: January 21, 1999

Manufacturer: LG Electronics Inc.

Product Type: Household Microwave Oven

Model No.: MS-144YD

Mode of Operating: Maximum RF Power


Test Requirements: CFR Title 47, Part 18

Test Equipment: Electro-Metrics FIM EMC-30MKIV  
Electro-Metrics Metering Module CRM-30

Detector Mode: Peak

Measurement Distance: 3 meters

Antenna: Electro-Metrics Biconical Antenna BIA-25, Log Periodic Antenna LPA-25

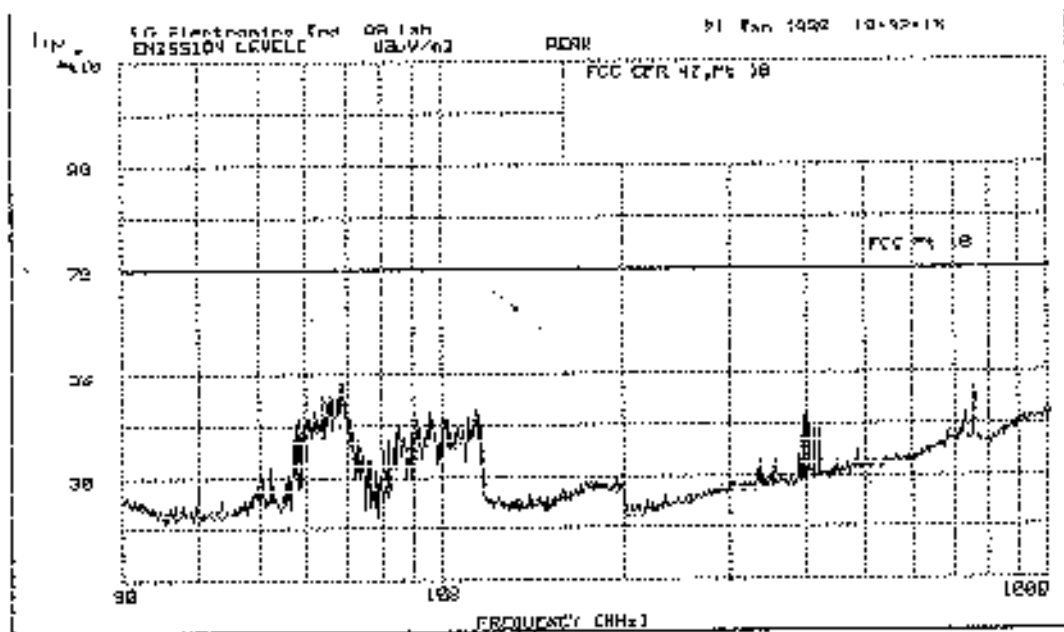

Toshiba. Hor.

ANT. POL.: HORIZONTAL

FCC ID : BEJS141XF

Model MS-144YD with Toshiba Magnetron

LABORATORY MEASUREMENTS BELOW 1 GHz

Data Page 3

Date Tested: January 21, 1999

Manufacturer: LG Electronics Inc.

Product Type: Household Microwave Oven

Model No.: MS-144YD

Mode of Operating: Maximum RF Power


Test Requirements: CFR Title 47, Part 18

Test Equipment: Electro-Metrics FIM EMC-30MKIV  
Electro-Metrics Metering Module CRM-30

Detector Mode: Peak

Measurement Distance: 3 meters

Antenna: Electro-Metrics Biconical Antenna BIA-25, Log Periodic Antenna LPA-25

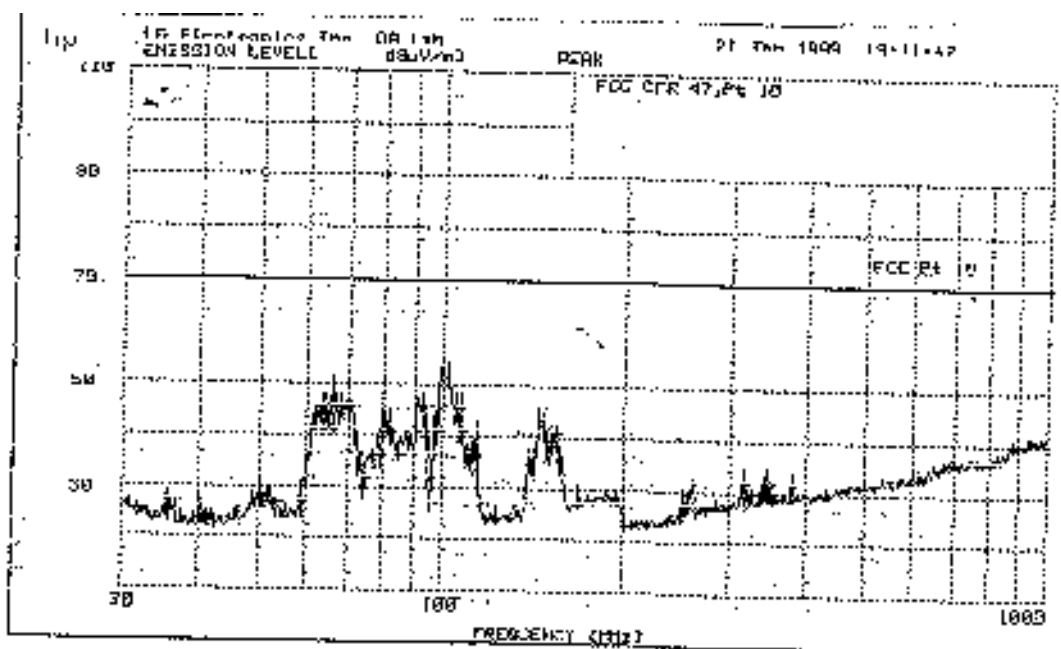

Toshiba, Vert.

ANT. POL.: VERTICAL

FCC ID : BEJS141XF

Model MS-144YD with Toshiba Magnetron

LG Electronics Inc., EMI Laboratory

391-2 Gaeumjeong - Dong, Changwon City,  
Gyeongnam, Korea 641-711

REPORT of MEASUREMENT  
of ELECTROMAGNETIC INTERFERENCE TESTING

Issued: January 27,1999

2. Name of Applicant: LG Electronics Inc.
3. Address of Applicant: 6133 North River Road Suite, 1100 (Riverway Plaza) Rosemont, IL 60018
4. Equipment Under Test: LG Electronics Inc., Microwave Oven Model MS-144YD  
with Magnetron Type **2M246** by LG Electronics Inc..
5. Power Supply: 120 V ac, 60 Hz
6. Test Requirements: CFR Title 47, Part 18
7. Test Procedure: OST MP-5
8. Instrument Used: Hioki Digital Power High Test Model 3181-01  
Holaday Industries Inc. Microwave Survey Meter Model 1700  
Electro Metrics Field Intensity Meter Model EMC-30 MKIV  
Electro Metrics Field Intensity Meter Model EMC-60 MKIV  
Electro Metrics Metering Module CRM-30  
Hewlett Packard Frequency Counter 5350A  
Hewlett Packard Sweep Oscillator 8350B
9. Test Condition: The Equipment Under Test (EUT) was tested while operating at maximum  
RF output power. Loads of water in a glass beaker was used in amount specified by  
Test Procedure.

FCC ID : BEJS141XF

Model MS-144YD with LG Magnetron

## 10. Results of Testings:

### B. Input Power

Input Power was measured using a Wattmeter.

A 275 ml water load was placed in the center of the oven and the oven was operated at full output power for 6 minutes after which the reading was taken.

A 275 ml water load was chosen for its compatibility with the UL procedure used by manufacturers to determine our input ratings.

| <u>Voltage</u>  | <u>Current</u> | <u>Input Power</u> | <u>Manufacturer's Rating</u> |
|-----------------|----------------|--------------------|------------------------------|
| 120 V ac, 60 Hz | 14.34 A        | 1615 W             | 13.6 A                       |

### C. RF Power Output

The Calorimetric Method was used to determine maximum output power.

A 1000 ml water load was placed in the center of the oven.

A mercury thermometer was used to measure temperature rise.

| <u>Quantity of Water</u> | <u>Starting Temperature</u> | <u>Final Temperature</u> | <u>Elapsed Time</u> |
|--------------------------|-----------------------------|--------------------------|---------------------|
| 1000 ml                  | 17.1 °C                     | 41.0 °C                  | 120 Sec             |

$$\text{Power (W)} = \frac{(4.2 \text{ Joules/Cal}) \times (\text{Volume in ml}) \times (\text{Temperature Rise})}{\text{Time in Seconds}}$$

$$\text{Power (W)} = \frac{4.2 \times 1000 \times 23.9}{120}$$

$$\text{Power (W)} = 836.5 \text{ Watts}$$

FCC ID : BEJS141XF

Model MS-144YD with LG Magnetron

#### D. Frequency Measurements

The fundamental operating frequency was measured with a substitution method using the Electro Metrics receiver, Hewlett Packard Sweep Oscillator and Frequency Counter.

The receiver was turned to the maximum amplitude at the oven operating frequency.

The Sweep Oscillator was substituted for operating the antenna and turned to the same frequency as the receiver. The frequency of the generator was determined using the frequency counter.

The frequency was observed over a period of time, and with line voltage variation.

The maximum frequency permitted in Part 18 is maximum 2.500 GHz and the minimum 2.400 GHz.

No out-of-band frequency measurement was observed.

Variation of Frequency With Time (1000 ml reduced to 200 ml)

Maximum Frequency Observed: 2.464GHz

Minimum Frequency Observed: 2.434 GHz

Variation of Frequency With Line Voltage (96 Volts to 150 Volts AC)

Maximum Frequency Observed: 2.461 GHz

Minimum Frequency Observed: 2.438 GHz

#### E. Microwave Leakage

Radiation leakage was measured in the as-received condition with the oven door closed using a microwave leakage meter.

No power greater than 0.18 mW/cm square was observed at any location on the enclosure of the oven.

A maximum of 1.0 mW/cm square is allowed in accordance with UL 923 standard.

Hence, microwave leakage in the as-received condition with the oven door closed, did not exceed the specified limit.

FCC ID : BEJS141XF

Model MS-144YD with LG Magnetron

## E. Radiated Emissions

Radiated emission was measured over a frequency range of 100 MHz to 10 GHz. For measurements the EUT was get set up in an Shielded Anechoic Chamber. The EUT was supported by a wood table, 1 m high in both cases, measurement above 1 GHz and below 1 GHz.

The results of measurements above 1 GHz are shown on Data Page 1. Maximum readings were recorded after variations in antenna polarization, antenna height, EUT orientation, load location, and load volume. Readings were taken with the antenna 3 meters away from the EUT. Field intensity was then extrapolated to a 300 meters distance by multiplying by a factor of 0.01 as described in Section 2.2.6 of MP-5.

No over-limit radiated emissions were discovered.

The results of measurements below 1 GHz are found on Data Page 2 and 3. They represent horizontal and vertical antenna polarization at 3 meters respectively.

11. Test Engineer:



Mr. S. G. PARK

Reviewed By:



Mr. S. Y. KIM

FCC ID : BEJS141XF

Model MS-144YD with LG Magnetron

# LABORATORY MEASUREMENTS ABOVE 1 GHz

Data Page 1

Date Tested: January 27, 1999

Equipment Under Test (EUT): Microwave Oven Model MS-144YD

Mode of Operating (DUT): Maximum RF Power

Test Requirements: CFR Title 47, Part 18

Test Equipment: Electro-Metrics FIM. EMC-60MKIV

Antenna: Double Ridged Guide Antenna RGA-180

Detector Mode: Average

Bandwidth: 1 MHz

Measurement Distance: 3 meters

| FREQ.<br>(GHz) | Antenna<br>Factor<br>(dB) | Cable<br>Factor<br>(dB) | Load<br>(ml) | Load<br>Locating | Meter<br>Reading<br>(dBμV) | Field<br>Intensity<br>@ 3 m<br>dBμV/m | Field<br>Intensity<br>@ 3 m<br>(μV/m) | Field<br>Intensity<br>@ 300 m<br>(μV/m) | FCC<br>Limit<br>@ 300 m<br>(μV/m) |
|----------------|---------------------------|-------------------------|--------------|------------------|----------------------------|---------------------------------------|---------------------------------------|-----------------------------------------|-----------------------------------|
| 2.39           | 29.4                      | 0.6                     | 700          | Center           | 16.8                       | 46.5                                  | 211.3                                 | 2.11                                    | 32.3                              |
| 2.51           | 29.6                      | 0.6                     | 700          | Center           | 21.6                       | 51.5                                  | 375.8                                 | 3.76                                    | 32.3                              |
| 4.90           | 34.4                      | 0.9                     | 700          | Center           | 29.2                       | 63.7                                  | 1531.1                                | 15.31                                   | 32.3                              |
| 4.90           | 34.4                      | 0.9                     | 700          | RF               | 30.5                       | 65.0                                  | 1778.3                                | 17.78                                   | 32.3                              |
| 4.90           | 34.4                      | 0.9                     | 300          | Center           | 30.0                       | 64.5                                  | 1678.8                                | 16.79                                   | 32.3                              |
| 4.90           | 34.4                      | 0.9                     | 300          | RF               | 30.9                       | 65.4                                  | 1862.1                                | 18.62                                   | 32.3                              |
| 7.35           | 36.8                      | 1.2                     | 700          | Center           | 16.1                       | 53.0                                  | 446.7                                 | 4.47                                    | 32.3                              |
| 7.35           | 36.8                      | 1.2                     | 700          | RF               | 16.5                       | 53.4                                  | 467.7                                 | 4.68                                    | 32.3                              |
| 7.35           | 36.8                      | 1.2                     | 300          | Center           | 16.2                       | 53.1                                  | 451.8                                 | 4.52                                    | 32.3                              |
| 7.35           | 36.8                      | 1.2                     | 300          | RF               | 16.6                       | 53.5                                  | 473.2                                 | 4.73                                    | 32.3                              |
| 9.80           | 38.0                      | 1.5                     | 700          | Center           | 16.6                       | 55.9                                  | 623.7                                 | 6.24                                    | 32.3                              |

Note: RF = Right Front Corner

FCC ID : BEJS141XF

Model MS-144YD with LG Magnetron

LABORATORY MEASUREMENTS BELOW 1 GHz  
Data Page 2

Date Tested: January 27, 1999

Manufacturer: LG Electronics Inc.

Product Type: Household Microwave Oven

Model No.: MS-144YD

Mode of Operating: Maximum RF Power


Test Requirements: CFR Title 47, Part 18

Test Equipment: Electro-Metrics FIM EMC-30MKIV  
Electro-Metrics Metering Module CRM-30

Detector Mode: Peak

Measurement Distance: 3 meters

Antenna: Electro-Metrics Biconical Antenna BIA-25, Log Periodic Antenna LPA-25

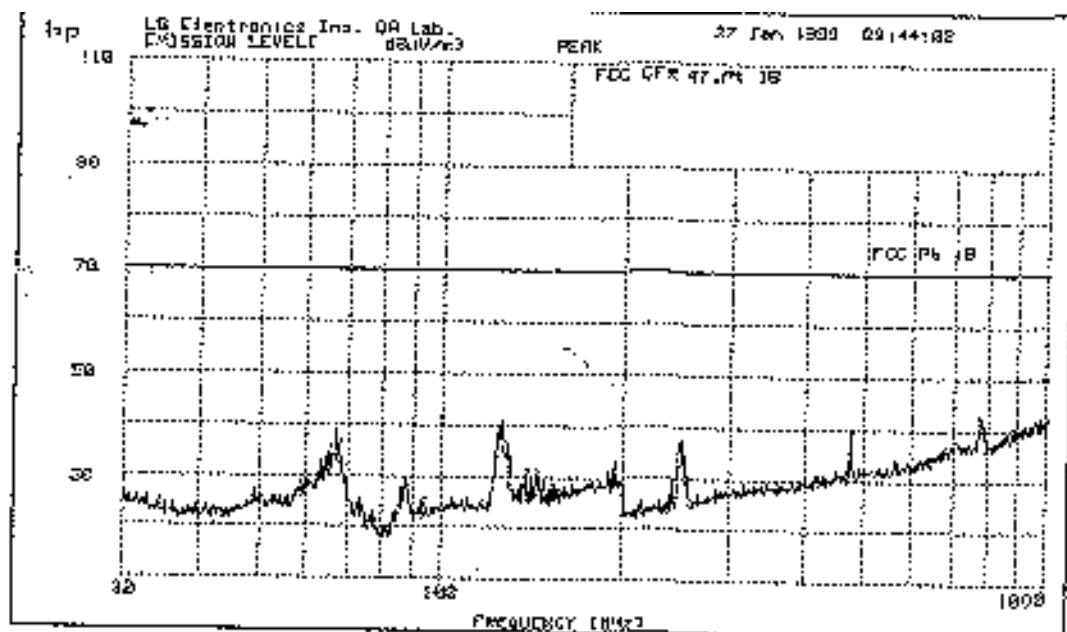

LG. Hor.

ANT. POL.: HORIZONTAL

FCC ID : BEJS141XF

Model MS-144YD with LG Magnetron

LABORATORY MEASUREMENTS BELOW 1 GHz  
Data Page 3

Date Tested: January 27, 1999

Manufacturer: LG Electronics Inc.

Product Type: Household Microwave Oven

Model No.: MS-144YD

Mode of Operating: Maximum RF Power


Test Requirements: CFR Title 47, Part 18

Test Equipment: Electro-Metrics FIM EMC-30MKIV  
Electro-Metrics Metering Module CRM-30

Detector Mode: Peak

Measurement Distance: 3 meters

Antenna: Electro-Metrics Biconical Antenna BIA-25, Log Periodic Antenna LPA-25

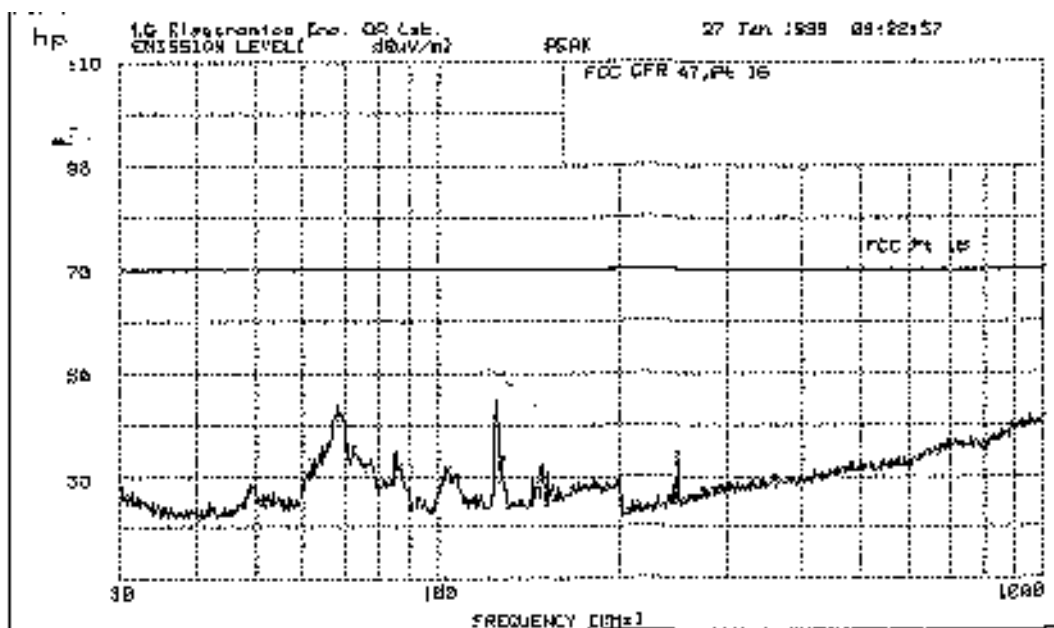

ANT. POL.: VERTICAL

FCC ID : BEJS141XF

Model MS-144YD with LG Magnetron