

TEST REPORT

FCC ID. :	2A48S-A20	
Test Report No..... :	TCT260128E030	
Date of issue..... :	Feb. 04, 2026	
Testing laboratory	SHENZHEN TONGCE TESTING LAB	
Testing location/ address:	2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China	
Applicant's name..... :	Shenzhenshi weiduli Technology Co., Ltd	
Address..... :	4h Floor, Building 4, Dejin industrial Zone, No. 40, Fuyuan 1st Road, HepingCommunity, Fuhai Street, Bao'an District Shenzhen, China	
Manufacturer's name ... :	Shenzhenshi weiduli Technology Co., Ltd	
Address..... :	4h Floor, Building 4, Dejin industrial Zone, No. 40, Fuyuan 1st Road, HepingCommunity, Fuhai Street, Bao'an District Shenzhen, China	
Standard(s)	FCC CFR Title 47 Part 15 Subpart C	
Product Name..... :	Power Bank	
Trade Mark	WEIDULI	
Model/Type reference..... :	A20-B, A20-A, A20, X2, PB-57, PB-58	
Rating(s)..... :	Refer to EUT description of page 3	
Date of receipt of test item	Jan. 19, 2026	
Date (s) of performance of test..... :	Jan. 19, 2026 ~ Feb. 04, 2026	
Tested by (+signature) ... :	Yannie ZHONG	
Check by (+signature).... :	Beryl ZHAO	
Approved by (+signature):	Tomsin	

General disclaimer:

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. General Product Information	3
1.1. EUT description	3
1.2. Model(s) list.....	3
2. Test Result Summary	4
3. General Information.....	5
3.1. Test environment and mode.....	5
3.2. Description of Support Units.....	6
3.3. Block Diagram of Test Setup.....	6
4. Facilities and Accreditations	7
4.1. Facilities	7
4.2. Location	7
5. Measurement Uncertainty	7
6. Test Results and Measurement Data	8
6.1. Antenna requirement	8
6.2. Conducted Emission.....	9
6.3. Radiated Spurious Emission Measurement.....	13
6.4. 20dB Bandwidth	24
Appendix A: Photographs of Test Setup	
Appendix B: Photographs of EUT	

1. General Product Information

1.1. EUT description

Product Name	Power Bank
Model/Type reference	A20-B
Sample Number.....	TCT260128E030-0101
Operation Frequency.....	111kHz~205kHz for 5W~15W 360kHz for 25W
Output power.....	5W/7.5W/10W/15W/MPP 25W
Modulation Technology	Load modulation
Antenna Type	Inductive loop coil Antenna
Rating(s)	Battery Energy: 38.5 Wh / 3.85 V Rated Capacity: 5800 mAh (DC 5 V, 3 A) Type-C Input: DC 5 V, 3 A/ DC 9 V, 2.22 A Type-C Output: DC 5 V, 3 A/ DC 9 V, 3 A/ DC 12 V, 2.92 A/ DC 15 V, 2.33 A/ DC 20 V, 1.75 A Wireless Charger Output: 5 W/ 7.5 W/ 10 W/15 W/ MPP 25 W

1.2. Model(s) list

No.	Model No.	Tested with
1	A20-B	☒
Other models	A20-A, A20, X2, PB-57, PB-58	☐

Note: A20-B is tested model, other models are derivative models. The models are identical in circuit and PCB layout, schematics, and BOM lists. The different are the model names and enclosure colour for commercial purpose. So the test data of A20-B can represent the remaining models.

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Spurious Emission	§15.209(a)(f)	PASS
20dB Bandwidth	§15.215(c)	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. General Information

3.1. Test environment and mode

Operating Environment:		
Condition	Conducted Emission	Radiated Emission
Temperature:	22.8 °C	23.3 °C
Humidity:	49 % RH	49 % RH
Atmospheric Pressure:	1010 mbar	1010 mbar
Test Mode:		
AC Mode:		
Mode 1	Charging	
DC Mode:		
Mode 2	Wireless Output(5W)	
Mode 3	Wireless Output(15W)	
Mode 4	Wireless Output(25W)	
Remark	All modes have been tested. The worst mode (Mode 1) reported for Conducted emission test and the worst mode (Mode 2&4) reported for Radiated emission test.	
The sample was placed 0.8m for the measurement below above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case(Z axis) are shown in Test Results of the following pages.		

3.2. Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Adapter	MDY-11-EX	HA621111416247G	/	MI
Mobile Phone	MYW23CH/A	HYR59DVQWV	/	iPhone 16 PM

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

3.3. Block Diagram of Test Setup

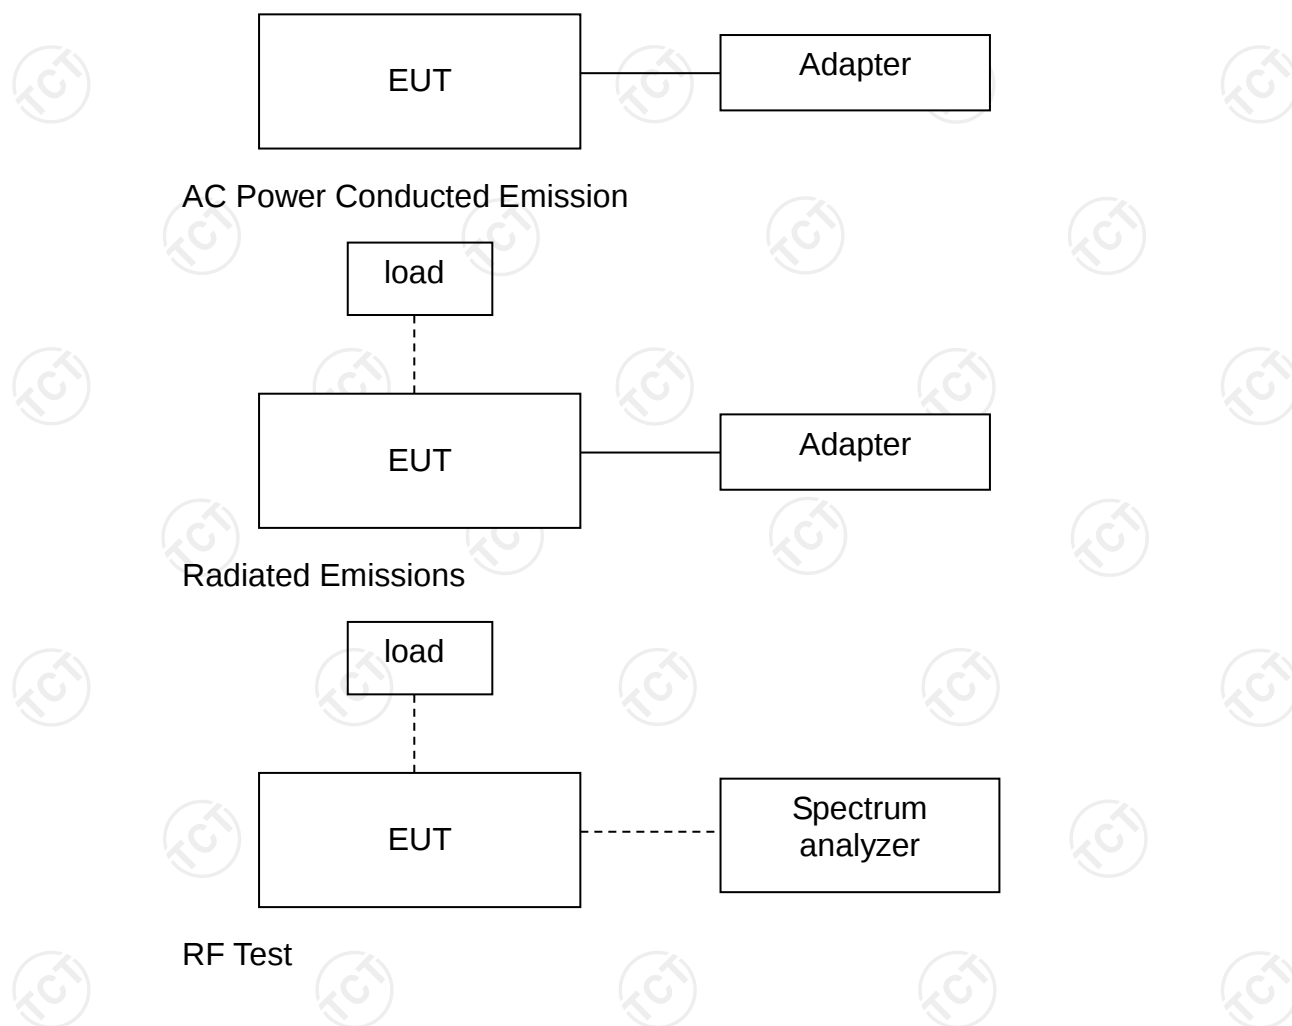

4. Facilities and Accreditations

4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- A2LA-No.: 4320.01

SHENZHEN TONGCE TESTING LAB

The testing lab has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.

4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339

5. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	± 3.10 dB
2	RF power, conducted	± 0.12 dB
3	Spurious emissions, conducted	± 0.11 dB
4	Occupied Bandwidth	± 57.74 kHz
5	All emissions, radiated(<1 GHz)	± 4.56 dB
6	All emissions, radiated(1 GHz - 18 GHz)	± 4.22 dB
7	All emissions, radiated(18 GHz- 40 GHz)	± 4.36 dB

6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:

FCC Part15 C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

E.U.T Antenna:

The antennas are inductive loop coil antenna which permanently attached.

6.2. Conducted Emission

6.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2020														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane 40cm Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Refer to item 3.1														
Test Procedure:	1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2020 on conducted measurement.														
Test Result:	PASS														


6.2.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)					
Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
EMI Test Receiver	R&S	ESCI3	100898	Jun. 26, 2025	Jun. 25, 2026
LISN	Schwarzbeck	NSLK 8126	8126453	Jan. 16, 2026	Jan. 15, 2027
10db Attenuator	R&S	ESH3-Z2	102720	Dec. 15, 2025	Dec. 14, 2026
Line-5	TCT	CE-05	/	Jun. 26, 2025	Jun. 25, 2026
EMI Test Software	EZ_EMG	EMEC-3A1	1.1.4.2	/	/

6.2.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

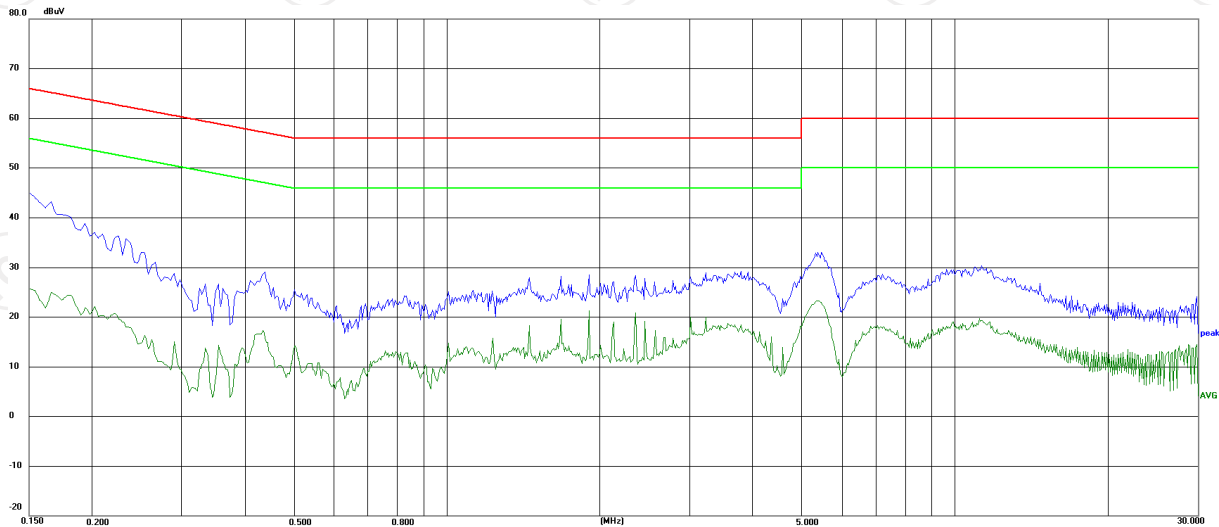

No.	Frequency (MHz)	QP Value (dBμV)	QP Limit (dBμV)	QP Margin (dB)	AVG Value (dBμV)	AVG Limit (dBμV)	AVG Margin (dB)	Result	Line
1	0.151	44.71	65.94	-21.23	25.72	55.94	-30.22	Pass	Line 1
2	0.166	43.28	65.16	-21.88	24.91	55.16	-30.25	Pass	Line 1
3	0.182	40.36	64.40	-24.04	24.35	54.40	-30.05	Pass	Line 1
4	0.203	36.63	63.49	-26.86	22.12	53.49	-31.37	Pass	Line 1
5	0.226	36.37	62.60	-26.23	20.43	52.60	-32.17	Pass	Line 1
6	0.438	29.06	57.10	-28.04	17.30	47.10	-29.80	Pass	Line 1

Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak

AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

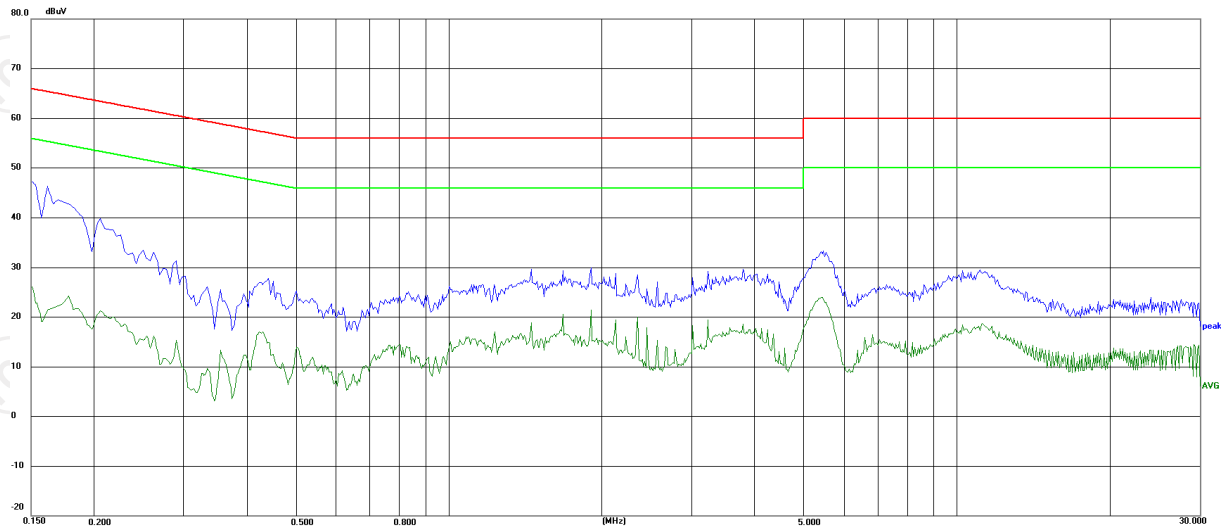

No.	Frequency (MHz)	QP Value (dBμV)	QP Limit (dBμV)	QP Margin (dB)	AVG Value (dBμV)	AVG Limit (dBμV)	AVG Margin (dB)	Result	Line
1	0.150	47.47	66.00	-18.53	26.94	56.00	-29.06	Pass	Neutral
2	0.178	42.86	64.58	-21.72	24.25	54.58	-30.33	Pass	Neutral
3	0.206	39.90	63.37	-23.47	21.21	53.37	-32.16	Pass	Neutral
4	0.442	27.83	57.02	-29.19	16.97	47.02	-30.05	Pass	Neutral
5	5.474	33.36	60.00	-26.64	23.95	50.00	-26.05	Pass	Neutral
6	11.254	29.44	60.00	-30.56	18.81	50.00	-31.19	Pass	Neutral

Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Margin (dB) = Measurement (dBμV) – Limits (dBμV)


Q.P. =Quasi-Peak AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

6.3. Radiated Spurious Emission Measurement

6.3.1. Test Specification

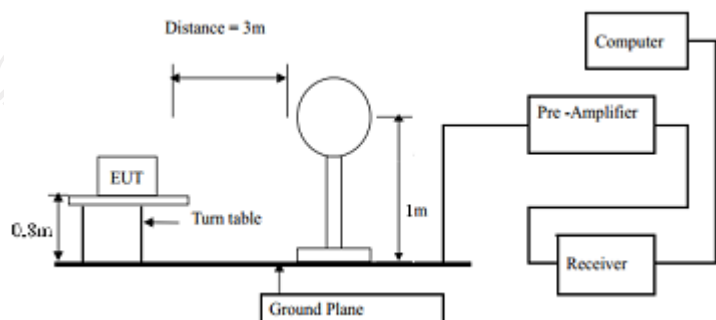Test Requirement:	FCC Part15 C Section 15.209																												
Test Method:	ANSI C63.10: 2020																												
Frequency Range:	9 kHz to 25 GHz																												
Measurement Distance:	3 m																												
Antenna Polarization:	Horizontal & Vertical																												
Operation mode:	Refer to item 3.1																												
Receiver Setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>9kHz- 150kHz</td><td>Quasi-peak</td><td>200Hz</td><td>1kHz</td><td>Quasi-peak Value</td></tr><tr><td>150kHz- 30MHz</td><td>Quasi-peak</td><td>9kHz</td><td>30kHz</td><td>Quasi-peak Value</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>120KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value				
	Frequency	Detector	RBW	VBW	Remark																								
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																								
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																								
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																								
Limit:	<table><tr><td>Frequency</td><td>Field Strength (microvolts/meter)</td><td>Measurement Distance (meters)</td></tr><tr><td>0.009-0.490</td><td>2400/F(KHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(KHz)</td><td>30</td></tr><tr><td>1.705-30</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table>					Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	0.009-0.490	2400/F(KHz)	300	0.490-1.705	24000/F(KHz)	30	1.705-30	30	30	30-88	100	3	88-216	150	3	216-960	200	3	Above 960	500	3
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)																										
	0.009-0.490	2400/F(KHz)	300																										
	0.490-1.705	24000/F(KHz)	30																										
	1.705-30	30	30																										
	30-88	100	3																										
	88-216	150	3																										
	216-960	200	3																										
	Above 960	500	3																										
Test setup:	For radiated emissions below 30MHz																												
	 Distance = 3m 0.8m Turn table 1m Ground Plane Computer Pre -Amplifier Receiver																												
	30MHz to 1GHz																												

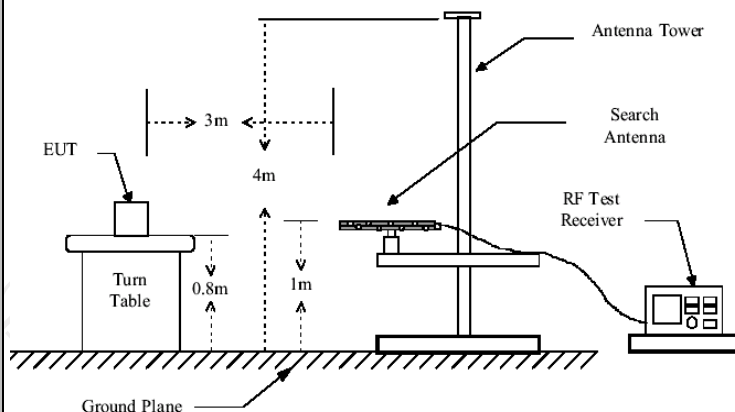

Test Procedure:

1. For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
2. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
4. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=120 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Test mode:

Refer to section 3.1 for details

Test results:

PASS


6.3.2. Test Instruments

Radiated Emission Test Site (966)					
Equipment	Manufacturer	Model	Serial Number	Date of Cal.	Due Date
EMI Test Receiver	R&S	ESCI7	100529	Jan. 16, 2026	Jan. 15, 2027
Spectrum Analyzer	R&S	FSQ40	200061	Jun. 26, 2025	Jun. 25, 2026
Pre-amplifier	SKET	LNPA_0118G-45	SK2021012102	Jan. 16, 2026	Jan. 15, 2027
Pre-amplifier	SKET	LNPA_1840G-50	SK202109203500	Apr. 11, 2025	Apr. 10, 2026
Pre-amplifier	HP	8447D	2727A05017	Jun. 26, 2025	Jun. 25, 2026
Loop antenna	Schwarzbeck	FMZB1519B	00191	Jun. 30, 2025	Jun. 29, 2026
Broadband Antenna	Schwarzbeck	VULB9163	340	Jun. 29, 2025	Jun. 28, 2026
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jun. 29, 2025	Jun. 28, 2026
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Jan. 17, 2026	Jan. 16, 2027
Coaxial cable	SKET	RE-03-D	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-03-M	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-03-L	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-04-D	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-04-M	/	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	SKET	RE-04-L	/	Jun. 27, 2025	Jun. 26, 2026
Antenna Mast	Keleto	RE-AM	/	/	/
EMI Test Software	EZ EMC	FA-03A2 RE+	1.1.4.2	/	/


6.3.3. Test Data

Please refer to following diagram for individual

9KHz-30MHz (mode 2)

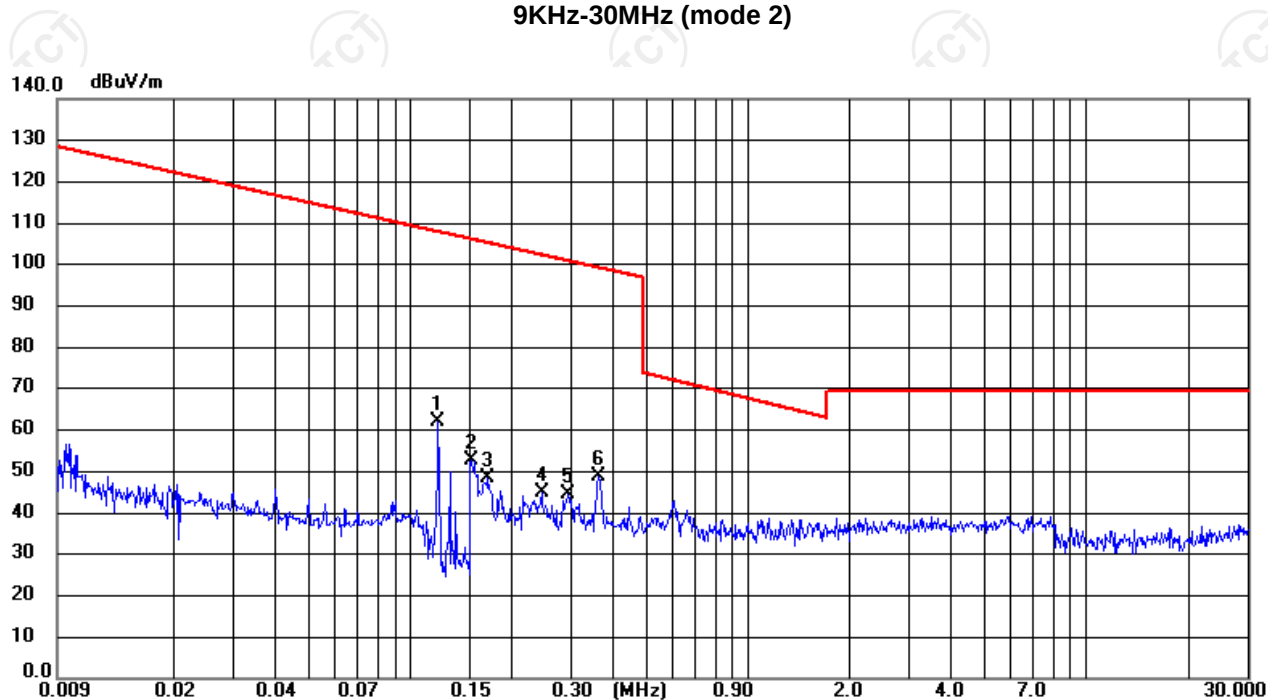


No.	Frequency (MHz)	Measure-ment(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1 *	0.121	61.86	107.89	-46.03	peak	Coaxial
2	0.151	52.67	106.14	-53.47	peak	Coaxial
3	0.170	48.55	105.20	-56.65	peak	Coaxial
4	0.244	45.04	102.33	-57.29	peak	Coaxial
5	0.292	44.64	100.91	-56.27	peak	Coaxial
6	0.361	48.68	99.22	-50.54	peak	Coaxial

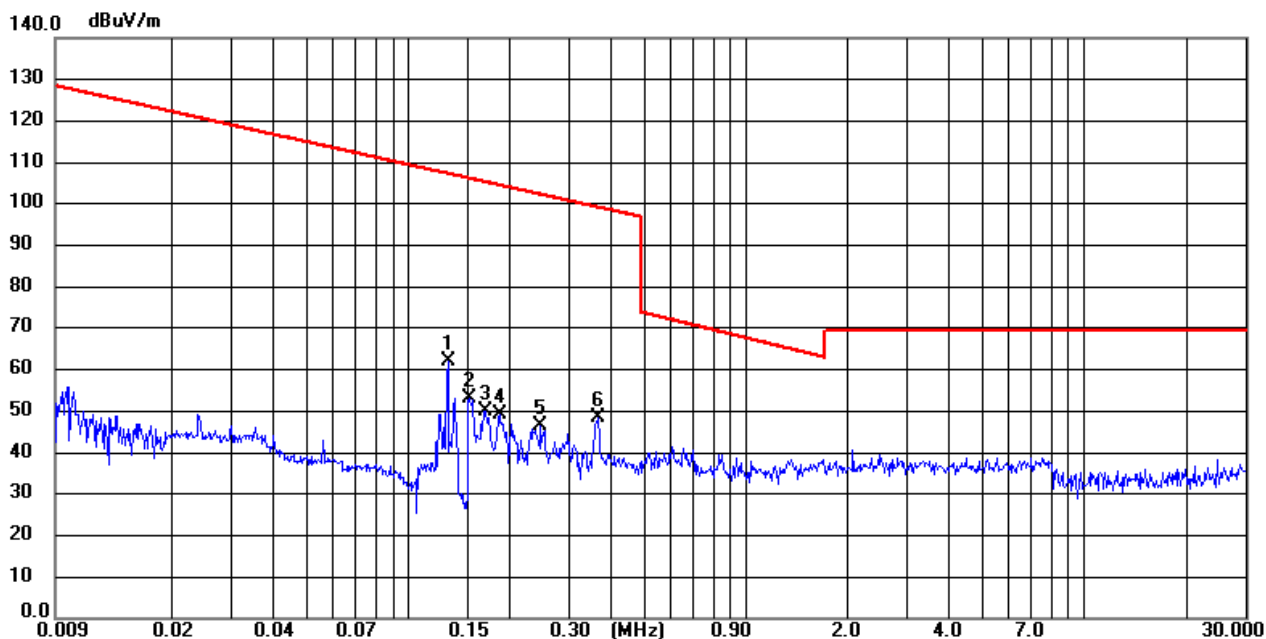


No.	Frequency (MHz)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1 *	0.131	62.05	107.26	-45.21	peak	Coplanar
2	0.151	53.13	106.14	-53.01	peak	Coplanar
3	0.170	50.14	105.20	-55.06	peak	Coplanar
4	0.185	49.19	104.52	-55.33	peak	Coplanar
5	0.246	46.35	102.26	-55.91	peak	Coplanar
6	0.364	48.35	99.16	-50.81	peak	Coplanar

9KHz-30MHz (mode 4)

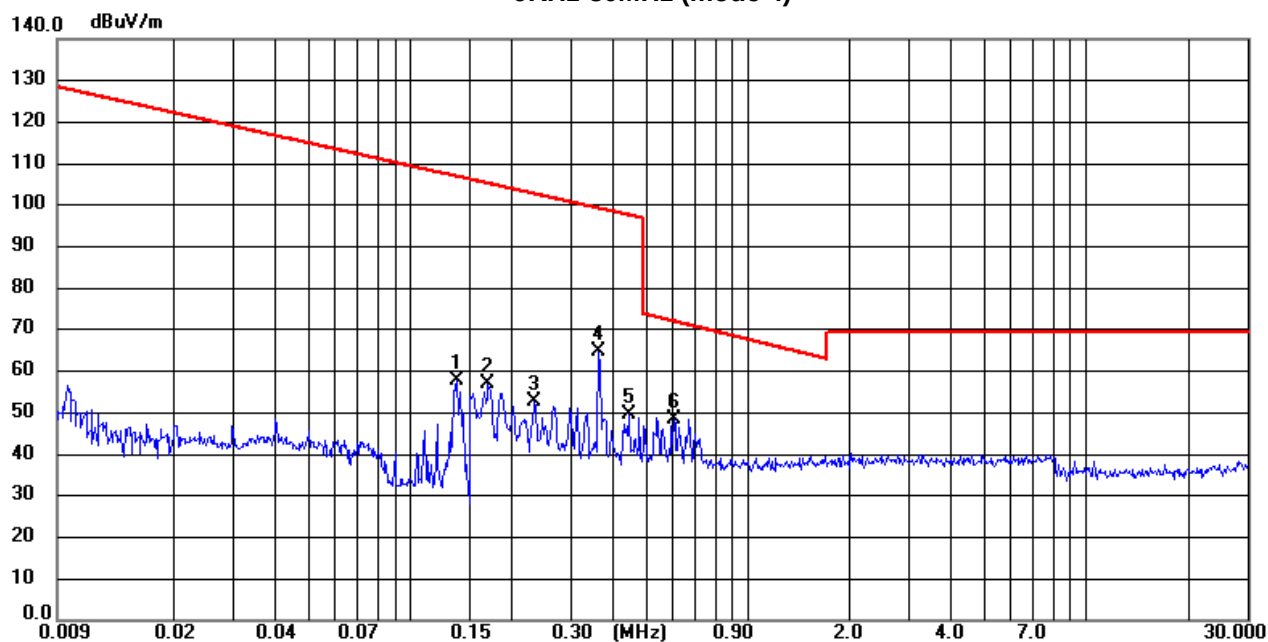


No.	Frequency (MHz)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	0.137	57.67	106.91	-49.24	peak	Coaxial
2	0.170	57.13	105.20	-48.07	peak	Coaxial
3	0.233	52.54	102.70	-50.16	peak	Coaxial
4	0.361	64.65	99.22	-34.57	peak	Coaxial
5	0.442	49.62	97.62	-48.00	peak	Coaxial
6 *	0.601	48.55	72.03	-23.48	peak	Coaxial

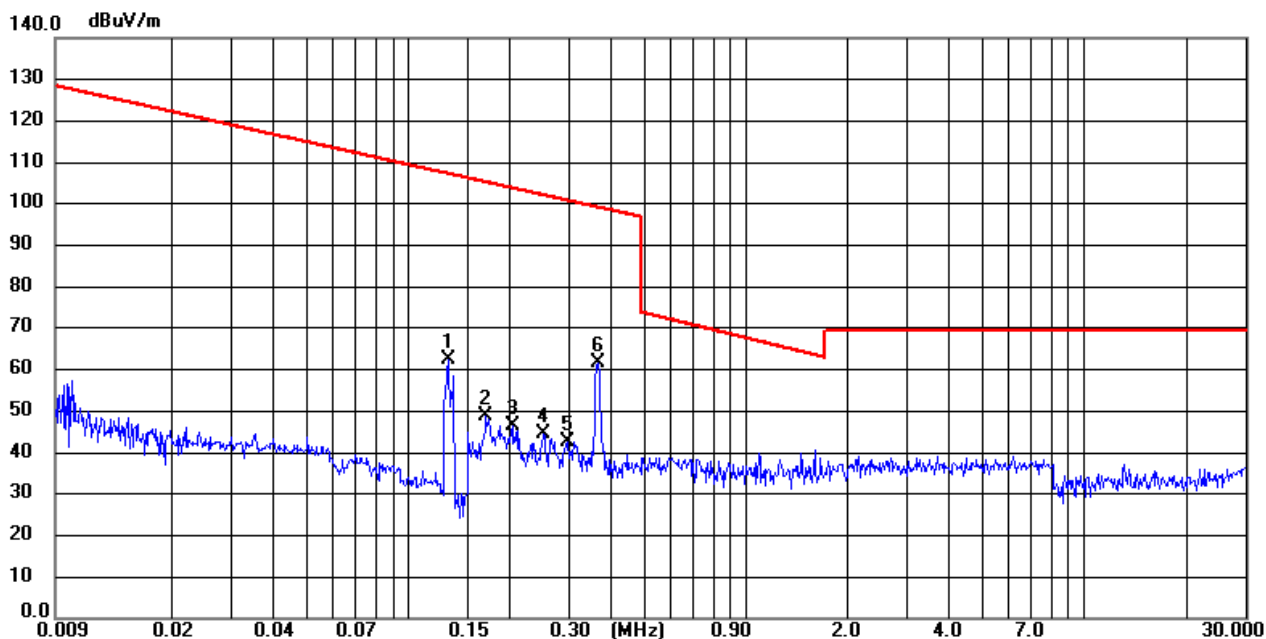

No.	Frequency (MHz)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	0.131	62.57	107.26	-44.69	peak	Coplanar
2	0.170	48.99	105.20	-56.21	peak	Coplanar
3	0.203	46.55	103.79	-57.24	peak	Coplanar
4	0.250	44.69	102.14	-57.45	peak	Coplanar
5	0.297	42.46	100.77	-58.31	peak	Coplanar
6 *	0.364	61.81	99.16	-37.35	peak	Coplanar

30MHz-1GHz (mode 2)

Horizontal:

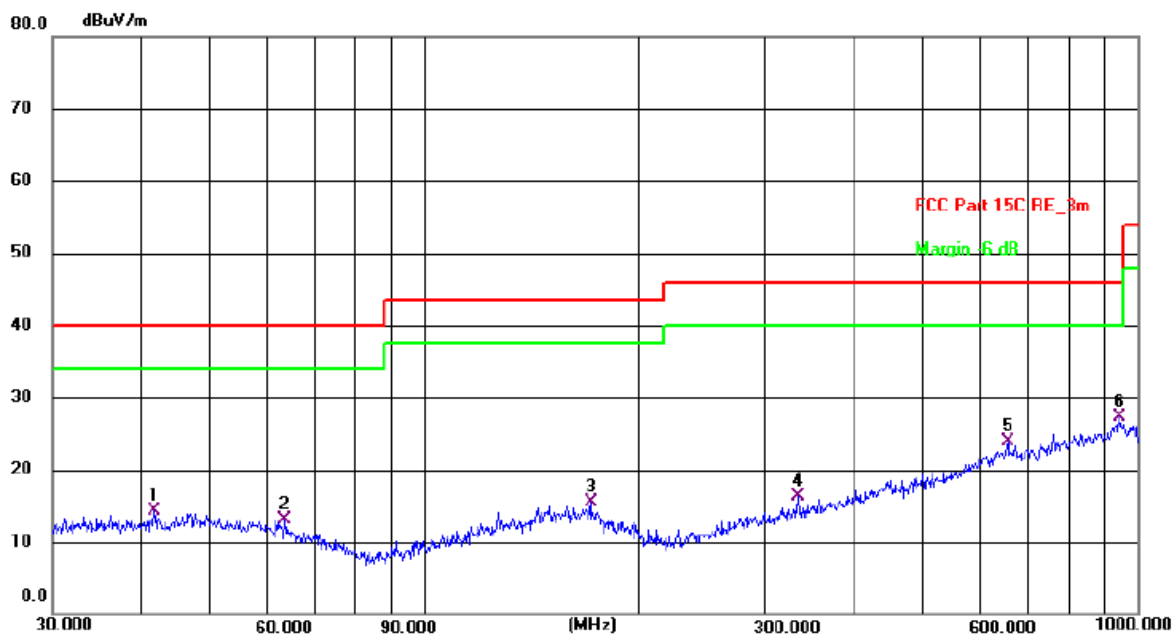


Site: 3m Anechoic Chamber1

Polarization: **Horizontal**

Temperature: 23.3(C) Humidity: 49 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	41.8412	26.40	-12.12	14.28	40.00	-25.72	QP	P	
2	63.7308	26.40	-13.28	13.12	40.00	-26.88	QP	P	
3	170.7926	27.17	-11.64	15.53	43.50	-27.97	QP	P	
4	333.9793	26.52	-10.13	16.39	46.00	-29.61	QP	P	
5	657.6820	27.42	-3.47	23.95	46.00	-22.05	QP	P	
6 *	940.8923	27.46	-0.10	27.36	46.00	-18.64	QP	P	

Vertical:

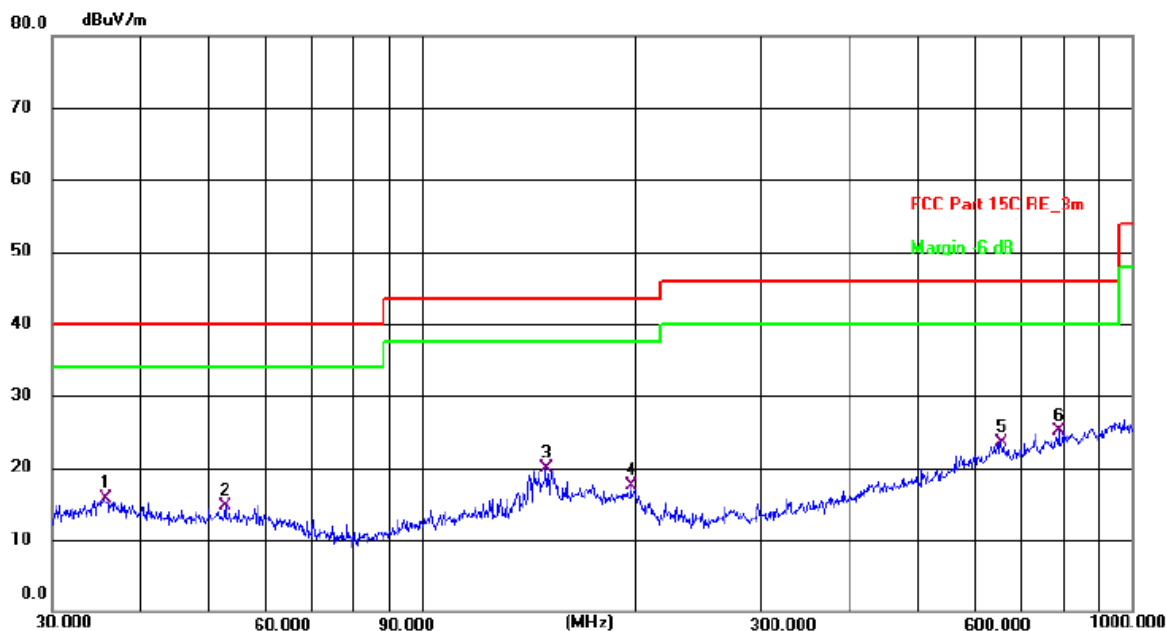

Site: 3m Anechoic Chamber1

Polarization: **Vertical**

Temperature: 23.3(C)

Humidity: 49 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	35.6708	28.18	-12.52	15.66	40.00	-24.34	QP	P	
2	52.6676	27.13	-12.47	14.66	40.00	-25.34	QP	P	
3	149.0278	31.15	-11.28	19.87	43.50	-23.63	QP	P	
4	196.5098	31.94	-14.44	17.50	43.50	-26.00	QP	P	
5	652.7996	27.04	-3.52	23.52	46.00	-22.48	QP	P	
6 *	787.8513	27.47	-2.33	25.14	46.00	-20.86	QP	P	

Note:

Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

30MHz-1GHz (mode 4)

Horizontal:

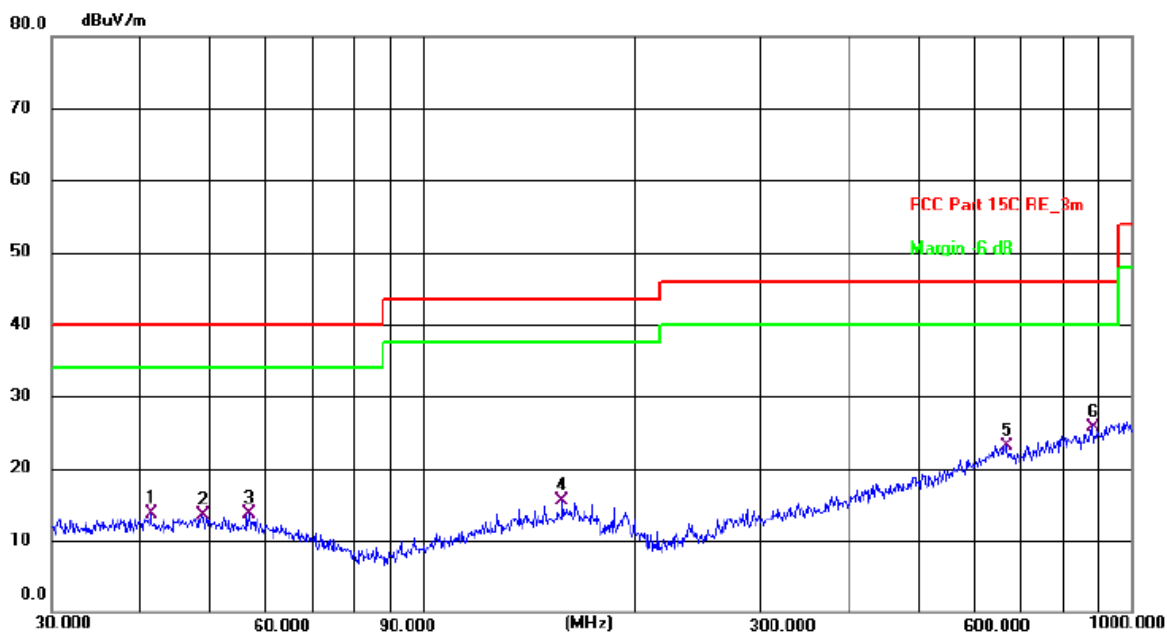

Site: 3m Anechoic Chamber1


Polarization: *Horizontal*

Temperature: 23.3(C)

Humidity: 49 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	41.4215	25.72	-12.08	13.64	40.00	-26.36	QP	P	
2	48.9715	25.80	-12.29	13.51	40.00	-26.49	QP	P	
3	57.1413	26.21	-12.56	13.65	40.00	-26.35	QP	P	
4	157.9737	26.62	-11.02	15.60	43.50	-27.90	QP	P	
5	668.7282	26.84	-3.69	23.15	46.00	-22.85	QP	P	
6 *	879.0917	26.99	-1.19	25.80	46.00	-20.20	QP	P	

Vertical:

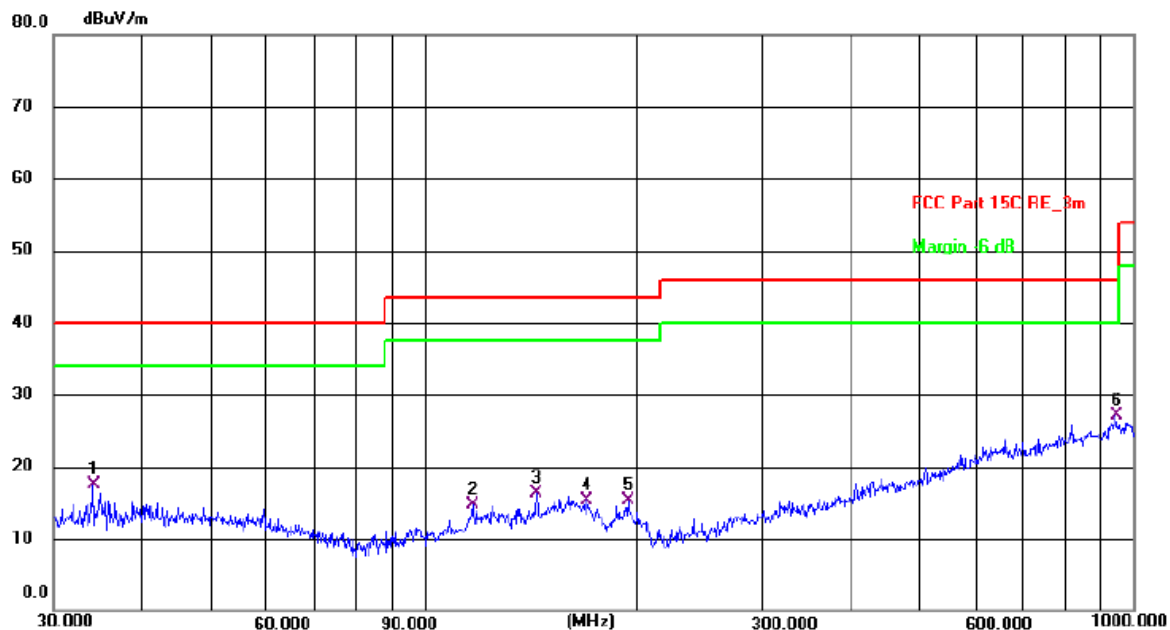

Site: 3m Anechoic Chamber1

Polarization: **Vertical**

Temperature: 23.3(C)

Humidity: 49 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	34.1560	30.09	-12.60	17.49	40.00	-22.51	QP	P	
2	116.9494	28.24	-13.58	14.66	43.50	-28.84	QP	P	
3	143.9556	28.14	-11.81	16.33	43.50	-27.17	QP	P	
4	169.8965	27.03	-11.63	15.40	43.50	-28.10	QP	P	
5	193.8577	29.49	-14.20	15.29	43.50	-28.21	QP	P	
6 *	943.3701	27.11	-0.04	27.07	46.00	-18.93	QP	P	

Note:

Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6.4. 20dB Bandwidth

6.4.1. Test Specification

Test Requirement:	§15.215(c)
Test Method:	ANSI C63.10: 2020
Limit:	N/A
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The transmitter shall be operated at its maximum carrier power measured under normal test conditions. 2. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. 3. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW. Sweep = auto; Detector function = peak; Trace = max hold. 4. Measure and record the results in the test report.
Test Result:	PASS

6.4.2. Test Instruments


Equipment	Manufacturer	Model No.	Serial Number	Date of Cal.	Due Date
Spectrum Analyzer	KEYSIGHT	N9020A	MY53421822	Jan. 16, 2026	Jan. 15, 2027

6.4.3. Test data

5W:

Frequency (kHz)	20dB Bandwidth (kHz)	Conclusion
128	0.42	PASS

Test plots as follows:

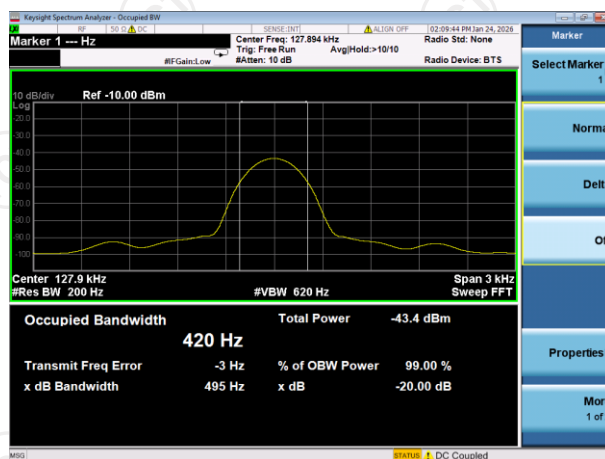

25W:

Frequency (kHz)	20dB Bandwidth (kHz)	Conclusion
360	0.554	PASS

Test plots as follows:



Note: The measured signal is Cw-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 200Hz and VBW is set to 620Hz to perform the occupied bandwidth test.

Appendix A: Photographs of Test Setup

Please refer to document Appendix No.: TCT260128E030-A

Appendix B: Photographs of EUT

Please refer to document Appendix No.: TCT260128E030-B & TCT260128E030-C

*******END OF REPORT*******