

TEST REPORT

Product Name : Riko Fresh-Made Wet Meal Feeder
Brand Name : Neakasa
Model : PS0300
Series Model : PS03*****
FCC ID : 2A87R-PS0300
Applicant : **Genhigh Tech Co.,Limited**
Address : #B2408, Building 9, District 2, Shenzhen Bay ECO-Technology Park, #3609 Baishi Road, High-tech Zone Community, Yuehai Street, Nanshan District, Shenzhen, 518000, China
Manufacturer : **Genhigh Tech Co.,Limited**
Address : #B2408, Building 9, District 2, Shenzhen Bay ECO-Technology Park, #3609 Baishi Road, High-tech Zone Community, Yuehai Street, Nanshan District, Shenzhen, 518000, China
Standard(s) : FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of Receipt : May. 07, 2026
Date of Test : May. 07, 2026~ Jun. 22, 2026
Issued Date : Jun. 22, 2026

Issued By: **Dongguan Yaxu (AiT) Technology Limited**
No. 22, Jinqianling 3rd Street, Jitigang, Huangjiang, Dongguan, Guangdong, China
Tel.: +86-769-8202 0499 Fax.: +86-769-8202 0495

Reviewed by: Emiya Lin
Emiya Lin

Approved by: Simba Huang
Simba Huang



Note: This device has been tested and found to comply with the standard(s) listed, this test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory. This report shall not be reproduced except in full, without the written approval of Dongguan Yaxu (AiT) Technology Limited. If there is a need to alter or revise this document, the right belongs to Dongguan Yaxu (AiT) Technology Limited, and it should give a prior written notice of the revision document. This test report must not be used by the client to claim product endorsement.



Report Revise Record

Report Version	Issued Date	Notes
M0	Jun. 22, 2026	Initial Release

Contents

1	TEST SUMMARY	4
1.1	TEST STANDARDS.....	4
1.2	TEST SUMMARY	4
1.3	TEST FACILITY	5
1.4	MEASUREMENT UNCERTAINTY	5
2	GENERAL INFORMATION	6
2.1	ENVIRONMENTAL CONDITIONS	6
2.2	GENERAL DESCRIPTION OF EUT	6
2.3	DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....	7
2.4	SPECIAL ACCESSORIES	8
2.5	EQUIPMENT LIST FOR THE TEST	9
3	TEST CONDITIONS AND RESULTS	10
3.1	CONDUCTED EMISSIONS TEST	10
3.2	RADIATED EMISSIONS AND BAND EDGE	14
3.3	MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	21
3.4	POWER SPECTRAL DENSITY	22
3.5	6dB BANDWIDTH.....	23
3.6	OUT-OF-BAND EMISSIONS	24
3.7	ANTENNA REQUIREMENT.....	26
4	TEST SETUP PHOTOGRAPHS OF EUT	27
5	PHOTOS OF EUT	28

1 TEST SUMMARY

1.1 Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of the FCC Rules

1.2 Test Summary

Test Item	Section in 47 CFR	Result
Antenna requirement	§15.203	Pass
On Time and Duty Cycle	/	/
AC Power Line Conducted Emission	§ 15.207(a)	Pass
Maximum Conducted Peak Output Power	§15.247 (b)(3)	Pass
-6dB Bandwidth	§15.247 (a)(2)	Pass
Power Spectral Density	§15.247 (e)	Pass
Transmitter Radiated Spurious Emission	§15.205/15.209	Pass
Restricted Bands	§15.205/15.209	Pass
Conducted Unwanted emissions and Band edge	§15.205, §15.247(d)	Pass

1.3 Test Facility

Test Laboratory: Dongguan Yaxu (AiT) Technology Limited

No.22, Jinqianling 3rd Street, Jitigang, Huangjiang, Dongguan, Guangdong, China

The test facility is recognized, certified or accredited by the following organizations:

CNAS-Registration No: L6177

Dongguan Yaxu (AiT) technology Limited is accredited to ISO/IEC 17025:2017 general Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the competence of testing and calibration laboratories) on April 18, 2022

FCC-Registration No.: 362653 Designation Number: CN1457

Dongguan Yaxu (AiT) Technology Limited has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

IC-Registration No.: 6819A CAB identifier: CN0122

The 3m Semi-anechoic chamber of Dongguan Yaxu (AiT) Technology Limited has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 6819A

A2LA-Lab Cert. No.: 6317.01

Dongguan Yaxu (AiT) Technology Limited has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

1.4 Measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Dongguan Yaxu (AiT) Technology Limited's quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for laboratory is reported:

Test	Measurement Uncertainty	Notes
Power Line Conducted Emission	9KHz~30MHz ± 1.20 dB	(1)
Radiated Emission	9KHz~30MHz ± 3.10 dB	(1)
Radiated Emission	30MHz~1GHz ± 3.75 dB	(1)
Radiated Emission	1GHz~18GHz ± 3.88 dB	(1)
Radiated Emission	18GHz~40GHz ± 3.88 dB	(1)
RF power, conducted	30MHz~6GHz ± 0.16 dB	(1)
RF power density, conducted	± 0.24 dB	(1)
Spurious emissions, conducted	± 0.21 dB	(1)
Temperature	$\pm 1^{\circ}\text{C}$	(1)
Humidity	$\pm 3\%$	(1)
DC and low frequency voltages	$\pm 1.5\%$	(1)
Time	$\pm 2\%$	(1)
Duty cycle	$\pm 2\%$	(1)
Bandwidth	$\pm 1.5 \times 10^{-6}$	(1)

The report uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard

uncertainty Multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%

2 GENERAL INFORMATION

2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2 General Description of EUT

Product Name:	Riko Fresh-Made Wet Meal Feeder
Model/Type reference:	PS0300
Serial Model:	PS03*****
Model Difference	All the models are electrically identical, with the same mechanical structure and design, except for differences in colors and sales regions. “ * ” Represents different colors and sales regions.
Power Supply:	DC 12V from adapter
Adapter:	Adapter 1: MODEL :CZH024N120150USWQ INPUT:100-240V~50/60Hz 0.8A Max OUTPUT: 12.0V==1.5A Manufacturer: Shenzhen CHANZEHO Technology Co., Limited.
	Adapter 2: MODEL :KAT018T-1201500US INPUT:100-240V~50/60Hz 0.65A Max OUTPUT: 12V==1500mA Manufacturer: Shenzhen Keyu Power Supply Technology Co., Ltd.
	Adapter 3: MODEL :KT241120150US INPUT:100-240V~50/60Hz 0.8A OUTPUT: 12.0V==1.5A 18.0W Manufacturer: SHENZHEN KUANTEN LIMITED
Hardware Version:	N/A
Software Version:	N/A
Sample(s) Status:	AiTDG-260507013-1(Normal sample) AiTDG-260507013-2(Engineer sample)
2.4G WIFI:	
Supported type:	802.11b/802.11g /802.11n(HT20)/802.11n(HT40)
Modulation:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM
Operation frequency:	802.11b/802.11g/802.11n(HT20): 2412MHz~2462MHz 802.11n(HT40): 2422MHz~2452MHz
Channel number:	802.11b/802.11g/802.11n(HT20): 11 802.11n(HT40): 7
Channel separation:	5MHz

Antenna type:	FPC antenna
Antenna gain:	5.87dBi
Remark: The above DUT's information was declared by manufacturer. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.	

2.3 Description of Test Modes and Test Frequency

There are 11 channels provided to the EUT for 20MHz protocol and 7 channels for 40 MHz protocol. Channel 01/06/11 were selected for 20MHz protocol mode test and channel 03/06/09 were selected for 40MHz protocol mode test.

.Operation Frequency List:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

Note: The line display in grey were the channel selected for testing

Exploratory testing was performed under each mode combination test channel; only the final measurement of the worst combination was made and recorded in this report.

Test case	Exploratory measurement			Final measurement Recorded In Report		
	Mode	Date rate	Channel	Mode	Date rate	Channel
Maximum output power	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)	1Mbps 6Mbps MCS0 MCS0	☒ Lowest ☒ Middle ☒ Highest
Power spectral density	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)	1Mbps 6Mbps MCS0 MCS0	☒ Lowest ☒ Middle ☒ Highest
-6dB bandwidth	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)	1Mbps 6Mbps MCS0 MCS0	☒ Lowest ☒ Middle ☒ Highest
Conducted Spurious Emissions	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	☒ Lowest ☒ Middle ☒ Highest	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	1Mbps 6Mbps MCS0 MCS0	☒ Lowest ☒ Middle ☒ Highest
Conducted Band edge	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	☒ Lowest ☒ Highest	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	1Mbps 6Mbps MCS0 MCS0	☒ Lowest ☒ Highest
Radiated Band edge	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	☒ Lowest ☒ Highest	802.11g	6Mbps	☒ Lowest ☒ Highest
Radiated Emissions Above 1GHz	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	☒ Lowest ☒ Middle ☒ Highest	802.11g	6Mbps	☒ Lowest ☒ Middle ☒ Highest
Radiated Emissions	802.11b 802.11g	1~11Mbps 6~54Mbps	☒ Lowest ☒ Middle	802.11g	6Mbps	☒ Middle

Below 1GHz	802.11n(HT20) 802.11n(HT40)	MCS0~MCS7 MCS0~MCS7	☒ Highest			
Conducted Emissions 9KHz-30 MHz	802.11b 802.11g 802.11n(HT20) 802.11n(HT40)	1~11Mbps 6~54Mbps MCS0~MCS7 MCS0~MCS7	☒ Lowest ☒ Middle ☒ Highest	802.11g	6Mbps	☒ Middle

Power setting during the test:

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters:

Test Software Version	Engineering Mode		
Frequency	2412/2422MHz	2437MHz	2452/2462MHz
802.11b	Default	Default	Default
802.11g	Default	Default	Default
802.11n(HT20)	Default	Default	Default
802.11n(HT40)	Default	Default	Default

2.4 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

Description	Manufacturer	Model	Serial No.	Provided by	Other
/	/	/	/	/	/

2.5 Equipment List for the Test

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	R&S	FSV40	101470	2025.09.25	2026.09.24
2	EMI Measuring Receiver	R&S	ESPI	100773	2025.09.25	2026.09.24
3	Low Noise Pre Amplifier	HP	HP8447E	1937A01855	2025.09.25	2026.09.24
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2025.09.25	2026.09.24
5	Passive Loop	ETS	6512	00165355	2024.09.04	2026.09.03
6	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2024.08.29	2026.08.28
7	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2024.08.29	2026.08.28
8	SHF-EHF Horn Antenna 15-40GHz	SCHWARZBECK	BBHA9170	BBHA9170367d	2023.09.12	2026.09.11
9	EMI Test Receiver	R&S	ESCI	100124	2025.09.25	2026.09.24
10	LISN	R&S	ESH3-Z5	892785/016	2025.09.25	2026.09.24
11	Pro.Temp&Humi.chamber	MENTEK	MHP-150-1C	MAA08112501	2025.09.25	2026.09.24
12	RF Automatic Test system	MW	MW100-RFCB	21033016	2025.09.25	2026.09.24
13	Signal Generator	Agilent	N5182A	MY50143009	2025.09.25	2026.09.24
14	Wideband Radio communication tester	R&S	CMW500	1201.0002K50	2025.09.25	2026.09.24
15	RF Automatic Test system	MW	MW100-RFCB	21033016	2025.09.25	2026.09.24
16	Pulse Limiter	R&S	ESH3-Z2	03578810.54	2025.09.25	2026.09.24
17	Switch	MFJ Rhinos	MFJ-2702	CZ3457	2025.09.25	2026.09.24
18	DC power supply	ZHAOXIN	RXN-305D-2	28070002559	N/A	N/A
19	RE Software	EZ	EZ-EMC_RE	Ver.AIT-03A	N/A	N/A
20	CE Software	EZ	EZ-EMC_CE	Ver.AIT-03A	N/A	N/A
21	RF Software	TST	TSTPASS	Version 2.0	N/A	N/A
22	temporary antenna connector(Note)	NTS	R001	N/A	N/A	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

3 TEST CONDITIONS AND RESULTS


3.1 Conducted Emissions Test

LIMIT

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

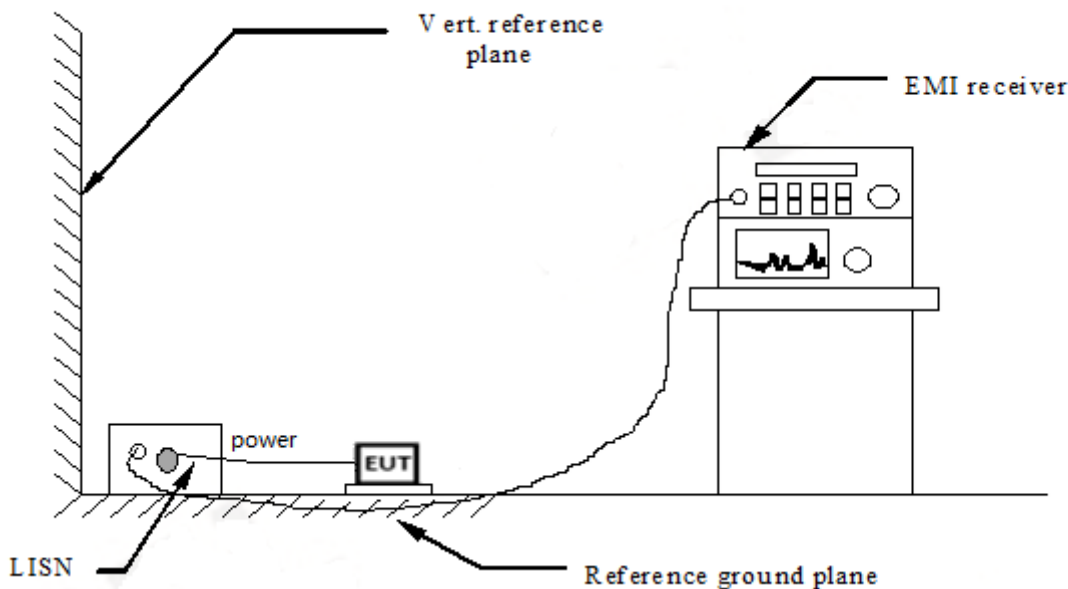

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a Floor-standing system; EUT is placed on the ground plane 10 cm above the ground as per ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024.
2. Support equipment, if needed, was placed as per ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipment received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1


connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.

7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Remark: 1. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:


2. All three Adapter configurations (Adapter 1 / 2 / 3) have been tested. The Adapter 1 configuration has been confirmed as the worst-case condition for all applicable tests. so only test data for Adapter 1 shall be reported.

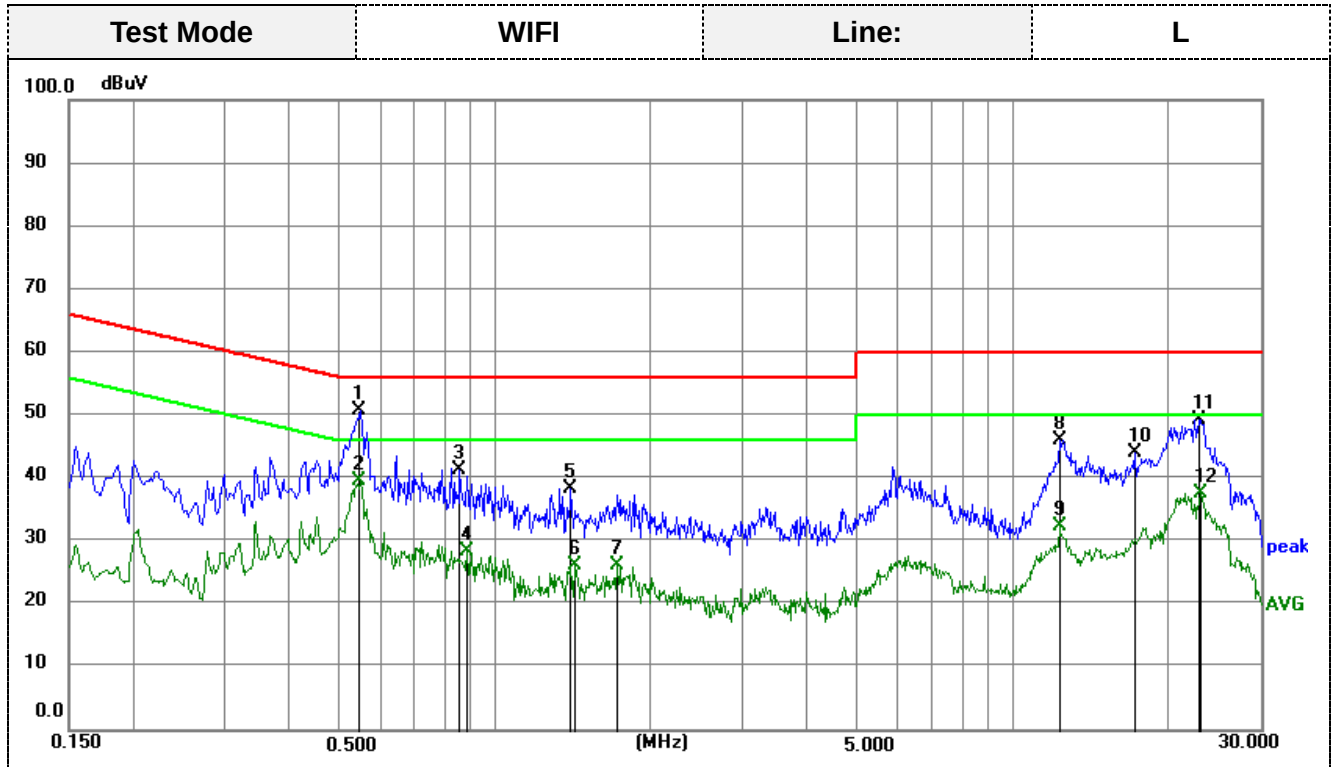

Remark: Correct Factor = Insertion loss of LISN + Cable loss + Insertion loss of Pulse Limiter;
Measurement Result = Reading Level + Correct Factor;

Margin = Measurement Result – Limit.

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.5503	39.73	11.06	50.79	56.00	-5.21	peak
2	0.5503	28.62	11.06	39.68	46.00	-6.32	AVG
3	0.8565	30.26	11.06	41.32	56.00	-14.68	peak
4	0.8833	17.32	11.06	28.38	46.00	-17.62	AVG
5	1.3965	27.33	11.06	38.39	56.00	-17.61	peak
6	1.4190	15.23	11.06	26.29	46.00	-19.71	AVG
7	1.7203	15.24	11.05	26.29	46.00	-19.71	AVG
8	12.2865	34.70	11.38	46.08	60.00	-13.92	peak
9	12.2865	20.99	11.38	32.37	50.00	-17.63	AVG
10	17.1600	32.07	11.91	43.98	60.00	-16.02	peak
11	22.8795	37.00	12.35	49.35	60.00	-10.65	peak
12	22.9243	25.33	12.35	37.68	50.00	-12.32	AVG

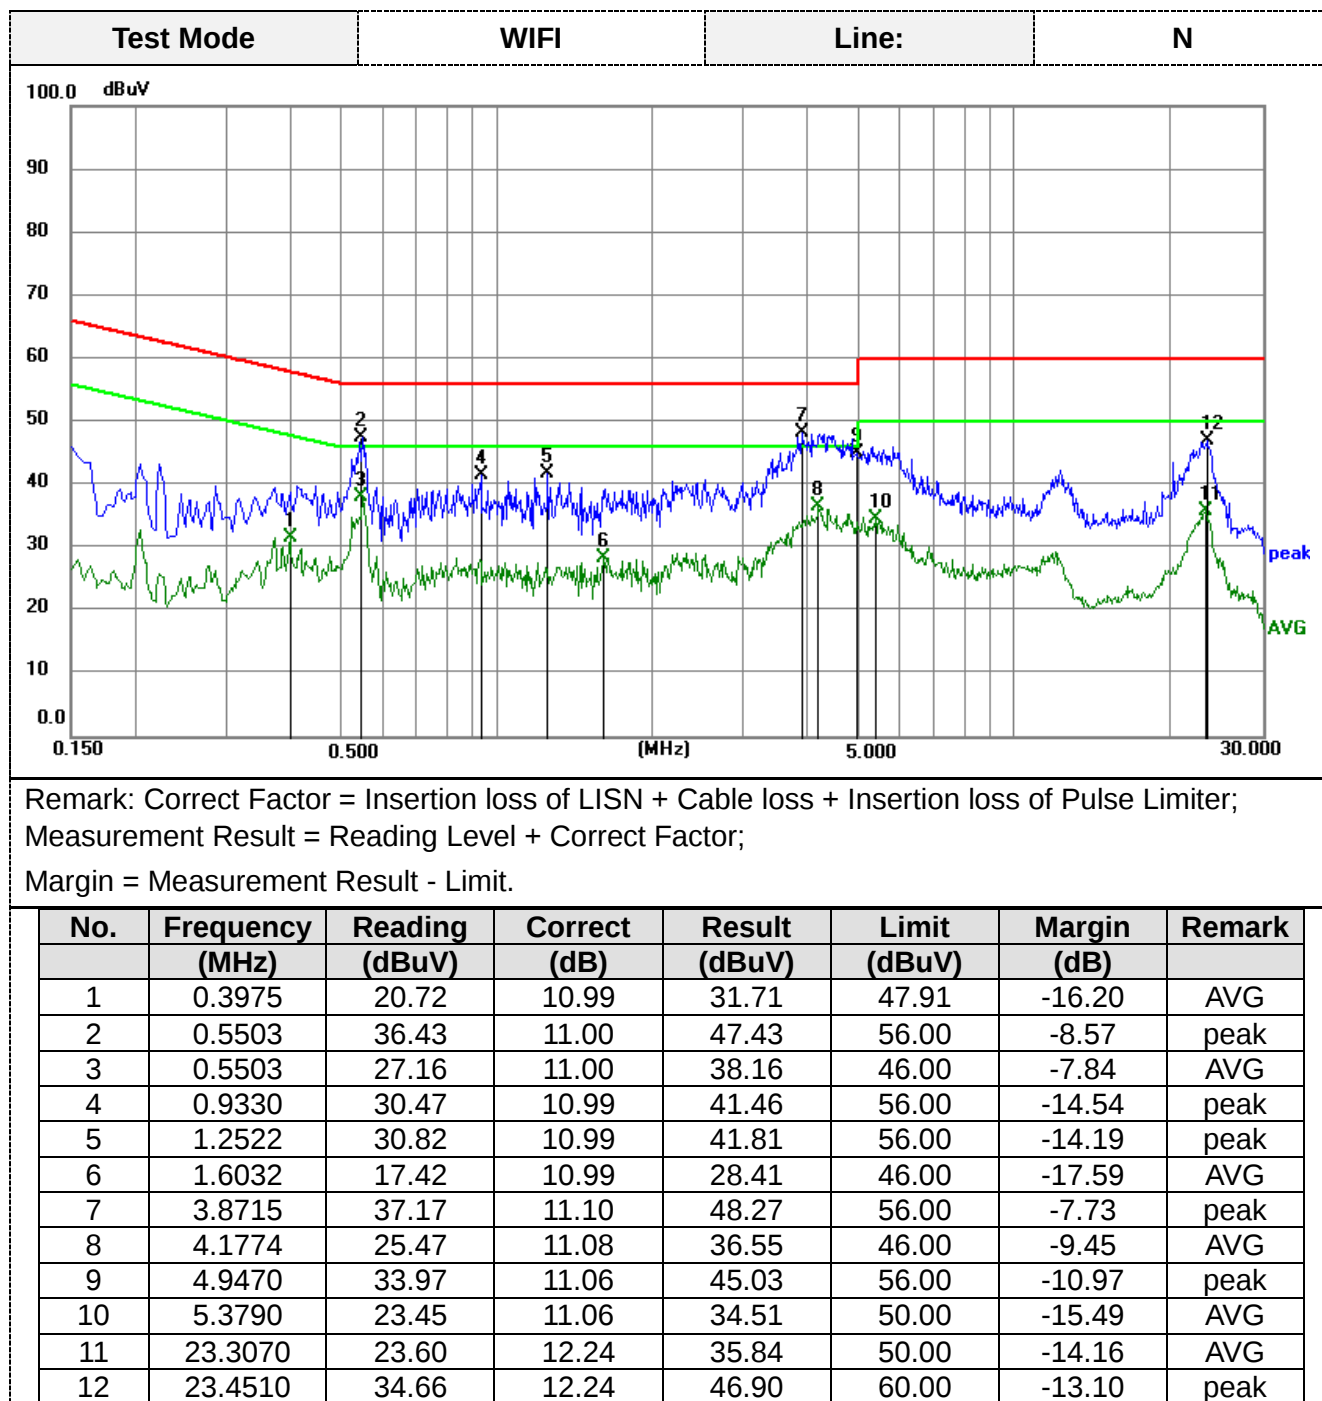

3.2 Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

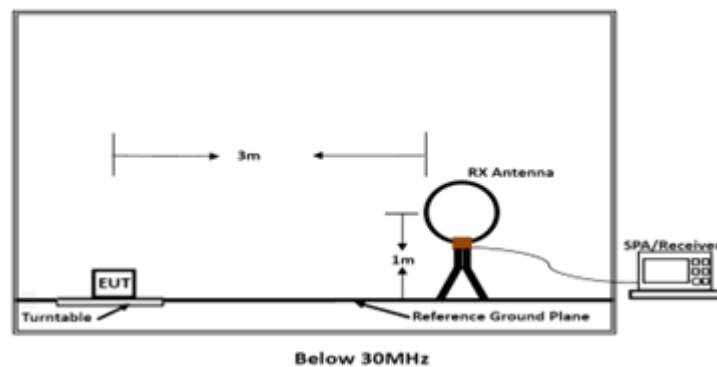

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

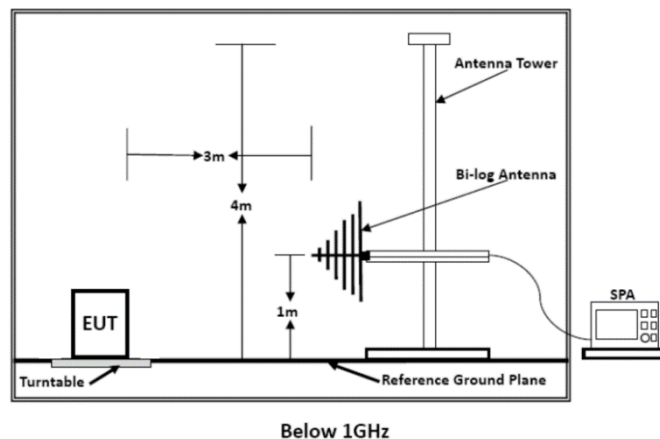

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

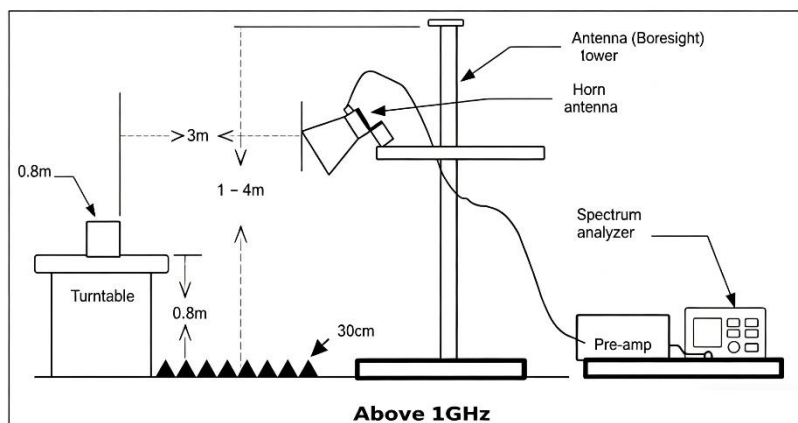

Test Procedure

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 25GHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

- Setting test receiver/spectrum as following table states:


Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

TEST RESULTS

Remark: 1. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and The emission levels from 9kHz to 30MHz are attenuated 20dB below the limit and not recorded in report.

2. All three Adapter configurations (Adapter 1 / 2 / 3) have been tested. The Adapter 1 configuration has been confirmed as the worst-case condition for all applicable tests. so only test data for Adapter 1 shall be reported.

For 30MHz-1GHz

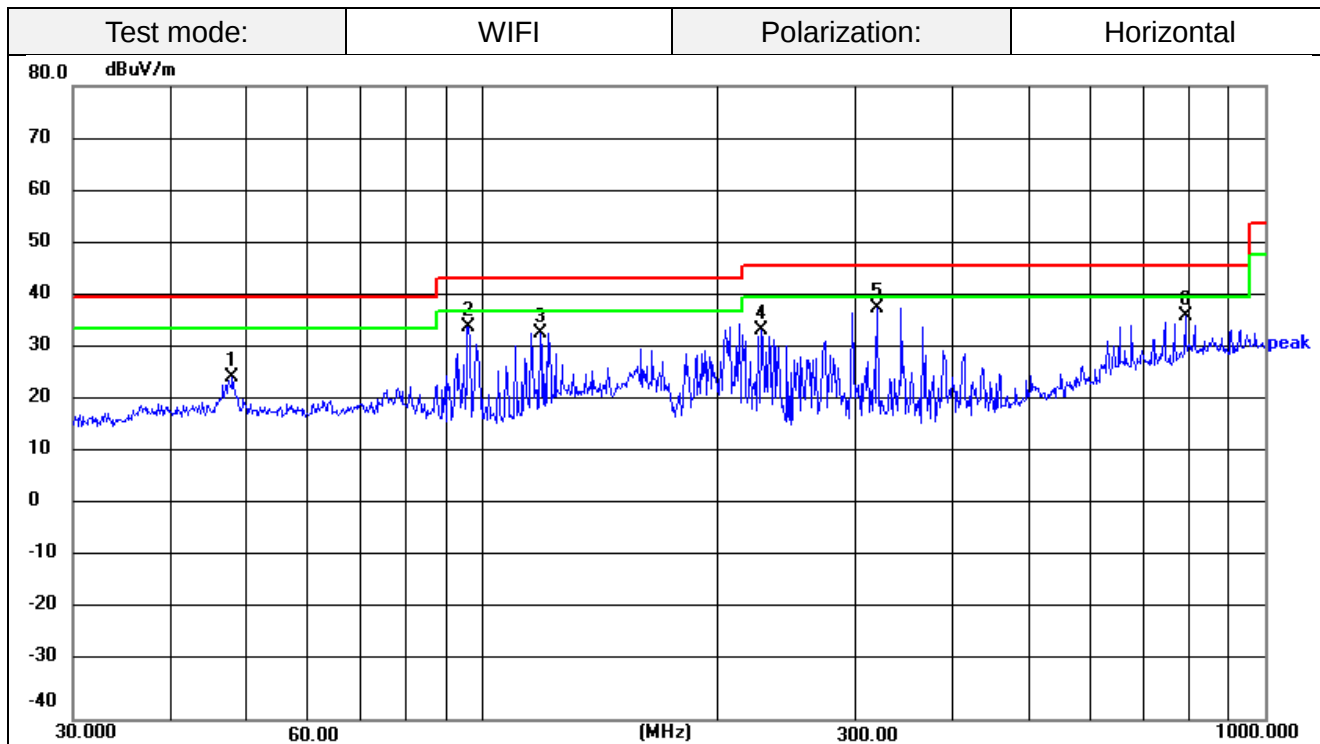


Remark:

Emission Level = Reading + Factor;

Factor = Antenna Factor + Cable Loss – Pre-amplifier;

Margin = Emission Level - Limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	47.9940	34.33	-9.45	24.88	40.00	-15.12	peak
2	96.0985	47.74	-13.28	34.46	43.50	-9.04	peak
3	118.6012	44.58	-11.31	33.27	43.50	-10.23	peak
4	227.6904	44.45	-10.70	33.75	46.00	-12.25	peak
5	319.9370	45.38	-7.31	38.07	46.00	-7.93	peak
6	790.6186	32.87	3.56	36.43	46.00	-9.57	peak

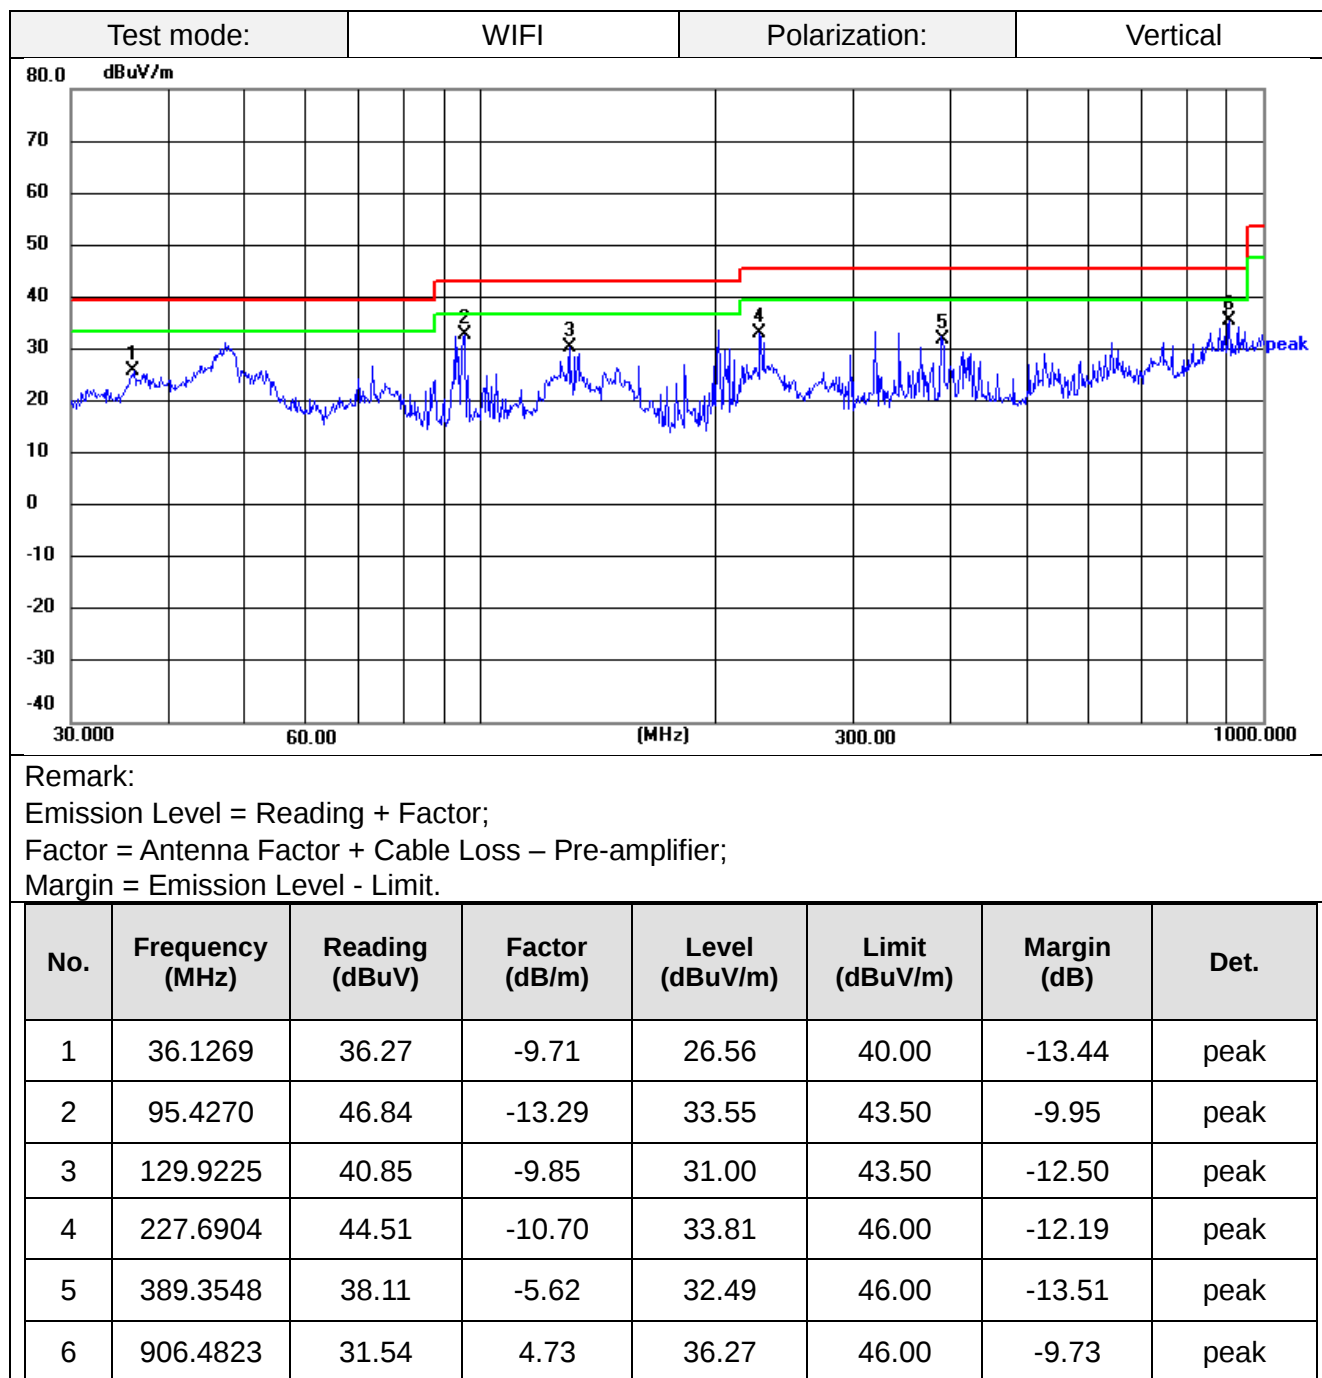

For 1GHz to 25GHz
802.11g (above 1GHz)

Frequency(MHz):		2412		Polarity:	Horizontal	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
4824.65	64.13	-7.34	56.79	74	-17.21	PEAK
4824.65	53.99	-7.34	46.65	54	-7.35	AVG
7236.75	53.14	-1.33	51.81	74	-22.19	PEAK
--	--	--	--	--	--	AVG

Frequency(MHz):		2412		Polarity:	VERTICAL	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
4824.65	65.06	-7.34	57.72	74	-16.28	PEAK
4824.65	55.79	-7.34	48.45	54	-5.55	AVG
7236.75	54.14	-1.33	52.81	74	-21.19	PEAK
--	--	--	--	--	--	AVG

Frequency(MHz):		2437		Polarity:	Horizontal	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
4873.90	62.02	-6.82	55.20	74	-18.80	PEAK
4873.90	52.57	-6.82	45.75	54	-8.25	AVG
7310.55	50.30	-0.61	49.69	74	-24.31	PEAK
--	--	--	--	--	--	AVG

Frequency(MHz):		2437		Polarity:	VERTICAL	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
4873.90	62.80	-6.82	55.98	74	-18.02	PEAK
4873.90	51.98	-6.82	45.16	54	-8.84	AVG
7310.55	50.63	-0.61	50.02	74	-23.98	PEAK
--	--	--	--	--	--	AVG

Frequency(MHz):		2462		Polarity:	Horizontal	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
4944.00	62.75	-5.98	56.77	74	-17.23	PEAK
4944.00	51.65	-5.98	45.67	54	-8.33	AVG
7415.75	48.20	-0.1	48.10	74	-25.90	PEAK
--	--	--	--	--	--	AVG

Frequency(MHz):		2462		Polarity:	VERTICAL	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
4944.00	63.19	-5.98	57.21	74	-16.79	PEAK
4944.00	53.79	-5.98	47.81	54	-6.19	AVG
7415.75	48.42	-0.1	48.32	74	-25.68	PEAK
--	--	--	--	--	--	AVG

REMARKS:

1. Emission level (dBuV/m) = Reading (dBuV) + Factor (dB/m).
2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor.
3. Margin value = Emission level- Limit value.
4. -- Mean the PK detector measured value is below average limit.
5. Other emission levels are attenuated 20dB below the limit and not recorded in report.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz AV detector is for AV value.

Radiation Restricted band
802.11g

Frequency(MHz):		2412		Polarity:	Horizontal	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
2388.05	57.30	-4.07	53.23	74	-20.77	PEAK
2388.05	48.55	-4.07	44.48	54	-9.52	AVG
2390.00	58.00	-4.10	53.90	74	-20.10	PEAK
2390.00	49.85	-4.10	45.75	54	-8.25	AVG

Frequency(MHz):		2412		Polarity:	Vertical	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
2385.43	57.35	-4.03	53.32	74	-20.68	PEAK
2385.43	49.13	-4.03	45.10	54	-8.90	AVG
2390.00	58.95	-4.10	54.85	74	-19.15	PEAK
2390.00	50.17	-4.10	46.07	54	-7.93	AVG

Frequency(MHz):		2462		Polarity:	Horizontal	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.61	-3.09	54.52	74	-19.48	PEAK
2483.50	48.71	-3.09	45.62	54	-8.38	AVG
2484.93	58.19	-3.07	55.12	74	-18.88	PEAK
2484.93	49.59	-3.07	46.52	54	-7.48	AVG

Frequency(MHz):		2462		Polarity:	Vertical	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	58.35	-3.09	55.26	74	-18.74	PEAK
2483.50	49.94	-3.09	46.85	54	-7.15	AVG
2483.58	58.43	-3.09	55.34	74	-18.66	PEAK
2483.58	50.43	-3.09	47.34	54	-6.66	AVG

REMARKS:

1. Emission level (dBuV/m) = Reading (dBuV) + Factor (dB/m).
2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor.
3. Margin value = Emission level - Limit value.
4. Other emission levels are attenuated 20dB below the limit and not recorded in report.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz AV detector is for AV value.

3.3 Maximum Peak Conducted Output Power

Limit


The maximum peak conducted output power shall not exceed 1.0 W.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power Meter.

PKPM1 Peak power meter method described in ANSI C63.10 section 11.9.1.2 is used to measure the Conducted Output Power.

Test Configuration



Test Results

☒ **Pass** ☐ **Not Applicable**

Note:

For test data, please refer to Appendix RF test data for WIFI2.4G.

3.4 Power Spectral Density


Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
3. Set the $\text{VBW} \geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

Test Configuration

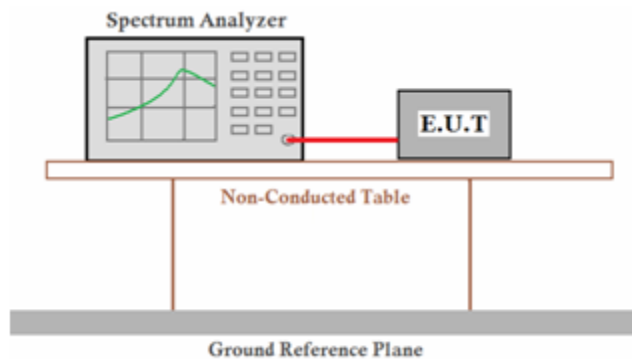

Test Results

☒ Pass ☐ Not Applicable

Note:

For test data, please refer to Appendix RF test data for WIFI2.4G.

3.5 6dB Bandwidth

Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz


Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer. Set EUT in transmitting mode.

- Set Spectrum Analyzer to OBW measurement mode and set bandwidth mode with X set to 6 dB.
- Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.

Allow trace to fully stabilize

Test Configuration

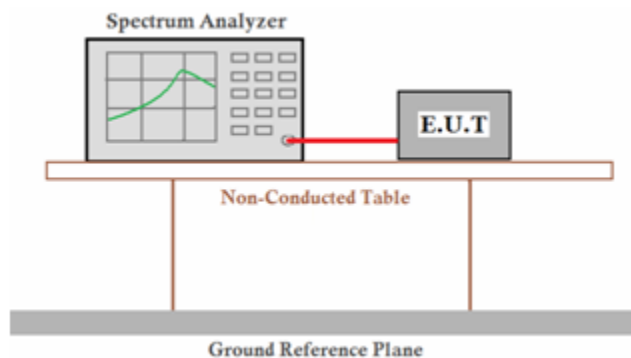

Test Results

☒ Pass ☐ Not Applicable

Note:

For test data, please refer to Appendix RF test data for WIFI2.4G.

3.6 Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer. Place the EUT on the table and set it in transmitting mode.

Step 1: Reference level measurement using the following procedure:

- g) Set instrument center frequency to DTS channel center frequency.
- h) Set the span to ≥ 1.5 times the DTS bandwidth.
- i) Set the RBW = 100 kHz.
- j) Set the VBW $\geq [3 \times \text{RBW}]$.
- k) Detector = peak.
- l) Sweep time = auto couple.
- m) Trace mode = max hold.
- n) Allow trace to fully stabilize.
- o) Use the peak marker function to determine the maximum PSD level.


Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Step 2: Emission level measurement using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements of PSD level measured in step 1 Reference level measurement.

Test Configuration

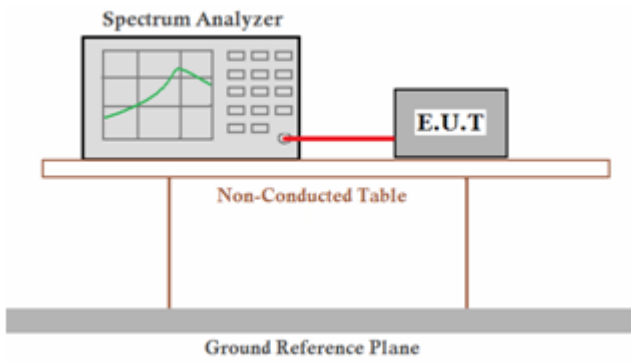

Test Results

Passed

☒ **Pass**

 ☐ **Not Applicable**

Note:

For test data, please refer to Appendix RF test data for WIFI2.4G.

3.7 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

FCC CFR Title 47 Part 15 Subpart C Section 15.247(b) (4):

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Result

The device used a FPC Antenna, the maximum gain of antenna is 5.87dBi with impedance 50Ω. The EUT antenna gain is provided by the applicant. This report is made solely on the basis of such data and/or information. We accept no responsibility for the authenticity and completeness of the above data and information and the validity of the results and or conclusions.

4 Test Setup Photographs of EUT

Conducted Emission



Radiated Emission (30MHz-1GHz)



5 Photos of EUT

Please refer to test report no.: AiTSZ-260507144W1

***** End of Report *****