



REPORT No.: SZ26040190W01

TEST REPORT

APPLICANT : Shenzhen Jimi IoT Co.,Ltd

PRODUCT NAME : Wireless BLE Tag

MODEL NAME : PB709, NODE, BT09

BRAND NAME : jimiiot

FCC ID : 2AMLF-PB709

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2026-04-17

TEST DATE : 2026-04-28 to 2026-05-21

ISSUE DATE : 2026-06-02

Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	5
1.2. Test Equipment List	6
1.3. Measurement Uncertainty	8
1.4. Testing Laboratory	8
2. General Description	9
2.1. Information of Applicant and Manufacturer	9
2.2. Information of EUT	9
2.3. Channel List of EUT	10
2.4. Test Configuration of EUT	11
2.5. Test Conditions	11
2.6. Test Setup Layout Diagram	11
3. Test Results	14
3.1. Antenna Requirement	14
3.2. Duty Cycle of Test Signal	15
3.3. Maximum Peak Conducted Output Power	16
3.4. Maximum Average Conducted Output Power	17
3.5. 6 dB Bandwidth	18
3.6. Conducted Spurious Emissions and Band Edge	19
3.7. Power Spectral Density	20
3.8. Conducted Emission	21
3.9. Restricted Frequency Bands	22
3.10. Radiated Emission	23
Annex A Test Data and Result	25
Notes	62



REPORT No.: SZ26040190W01

Change History		
Version	Date	Reason for change
1.0	2026-06-02	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	/
2	N/A	Duty Cycle of Test Signal	May 13, 2026	Zhu Peihong	PASS	/
3	15.247(b)	Maximum Peak Conducted Output Power	May 13, 2026	Zhu Peihong	PASS	/
4	15.247(b)	Maximum Average Conducted Output Power	May 13, 2026	Zhu Peihong	PASS	/
5	15.247(a)	Bandwidth	May 13, 2026	Zhu Peihong	PASS	/
6	15.247(d)	Conducted Spurious Emission and Band Edge	May 13, 2026	Zhu Peihong	PASS	/
7	15.247(e)	Power Spectral Density	May 13, 2026	Zhu Peihong	PASS	/
8	15.207	Conducted Emission	N/A	N/A ^{Note1}	N/A	/
9	15.247(d)	Restricted Frequency Bands	Apr. 28, 2026	Xiong Xianhong	PASS	/
10	15.209, 15.247(d)	Radiated Emission	Apr. 29, 2026 May 15, 2026	Xiong Xianhong	PASS	/

Note 1: Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

Note 2: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2020 and KDB 558074 D01 v05r02.

Note 3: Any additions, deviation, or exclusions from the method shall be noted in the "Remark".



1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2025.12.23	2026.12.22
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
JS32-RE	Tonscend	5.0.0

**1.2.3 Radiated Test Equipment**

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2026.04.28	2027.04.27
Test Antenna - Bi-Log	9163-274	VULB 9163	Schwarzbeck	2025.06.28	2026.06.27
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2025.05.16	2026.05.15
				2026.05.09	2027.05.08
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2025.06.20	2026.06.19
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2025.06.20	2026.06.19
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2025.05.13	2026.05.12
				2026.05.07	2027.05.06
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2025.05.13	2026.05.12
				2026.05.07	2027.05.06
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2025.05.13	2026.05.12
				2026.05.07	2027.05.06
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2025.09.03	2026.09.02
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2025.09.03	2026.09.02
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2025.09.03	2026.09.02
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	2025.09.03	2026.09.02
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KKF-2	Qualwave	2025.09.03	2026.09.02
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN-5	Qualwave	2025.09.03	2026.09.02
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.06.21	2028.06.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.04.19	2028.04.18



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	$\pm 2.22\text{dB}$	Confidence levels of 95%
Power Spectral Density	$\pm 2.22\text{dB}$	Confidence levels of 95%
Bandwidth	$\pm 5\%$	Confidence levels of 95%
Conducted Spurious Emission	$\pm 2.77\text{dB}$	Confidence levels of 95%
Restricted Frequency Bands	$\pm 5\%$	Confidence levels of 95%
Radiated Emission	$\pm 2.95\text{dB}$	Confidence levels of 95%
Conducted Emission	$\pm 2.44\text{dB}$	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525
FCC Designation Number:	CN1192
FCC Test Firm Registration Number:	226174

2. General Description

2.1. Information of Applicant and Manufacturer

Applicant:	Shenzhen Jimi IoT Co.,Ltd
Applicant Address:	3-4/F, Block A, Building #7, Shenzhen International Innovation Valley, Dashi 1st Road, Nanshan District, Shenzhen, Guangdong, China
Manufacturer:	Shenzhen Jimi IoT Co.,Ltd
Manufacturer Address:	3-4/F, Block A, Building #7, Shenzhen International Innovation Valley, Dashi 1st Road, Nanshan District, Shenzhen, Guangdong, China

2.2. Information of EUT

Product Name:	Wireless BLE Tag
Sample No.:	1#, 3#
Hardware Version:	PB709-MB-V1.0
Software Version:	PB709M_V1.4_20260414
Equipment Type:	Bluetooth LE
Bluetooth Version:	5.0
Modulation Type:	GFSK
Data Rate:	1Mbps
Operating Frequency Range:	2402MHz-2480MHz
Antenna Type:	PCB Antenna
Antenna Gain:	-0.92dBi

Note 1: The EUT description presented in the report are provided by applicant and/or manufacturer, and the test laboratory is not responsible for the accuracy of the information. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 2: According to the certificate holder, they declared that the models PB709, NODE, BT09 have the same hardware and software, only different for model number and colors, all RF parameters remain the same. The main measuring model is PB709, only the results for PB709 were recorded in this report.



2.3.Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

2.5. Test Conditions


Temperature (°C):	15–35
Relative Humidity (%):	30–60
Atmospheric Pressure (kPa):	86–106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

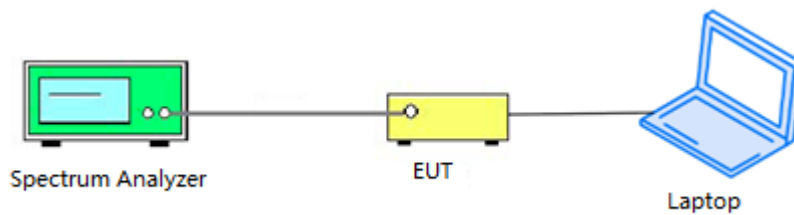


2.6.2. Conducted Emission Measurement

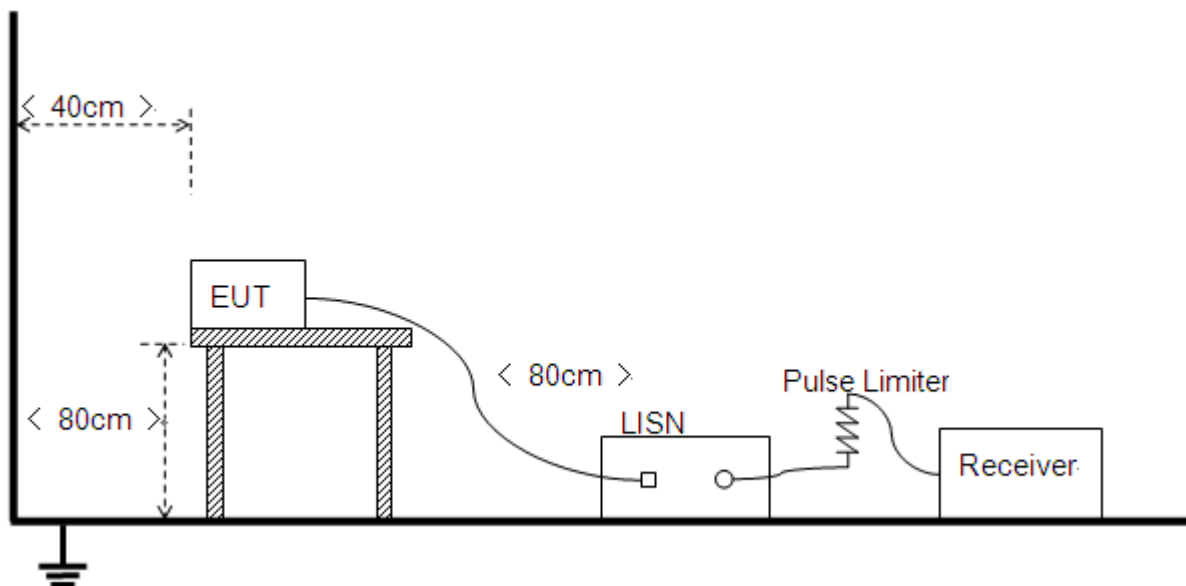


2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

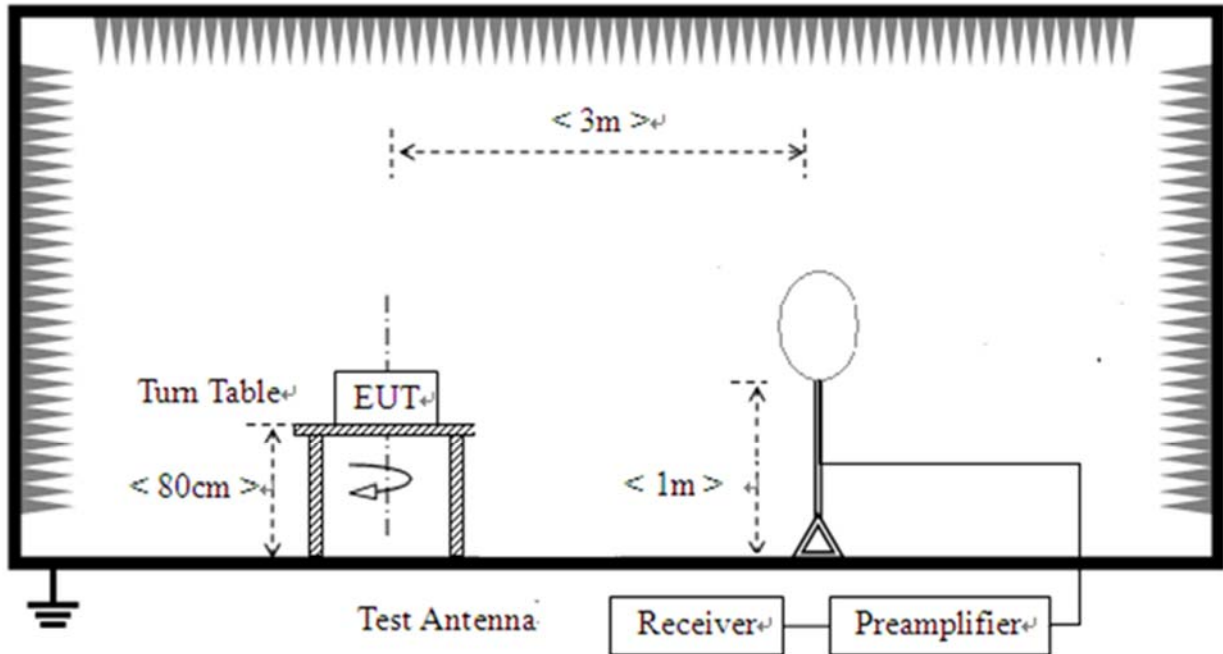

2) For radiated emissions from 30MHz to 1GHz

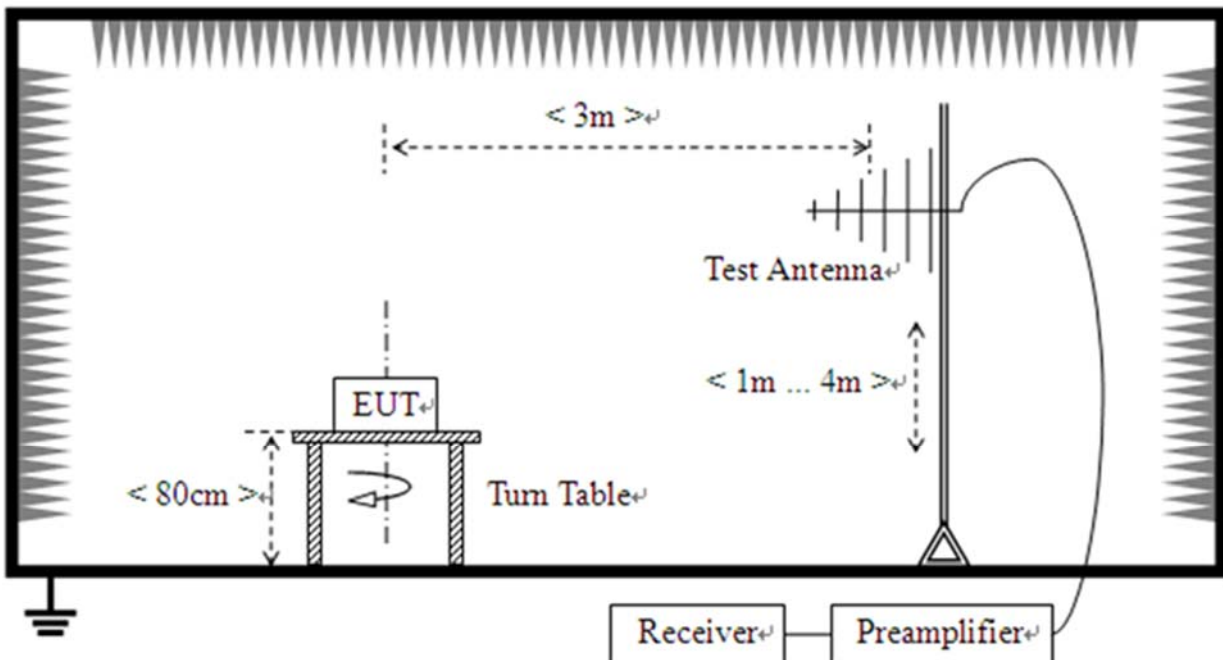

3) For radiated emissions above 1GHz

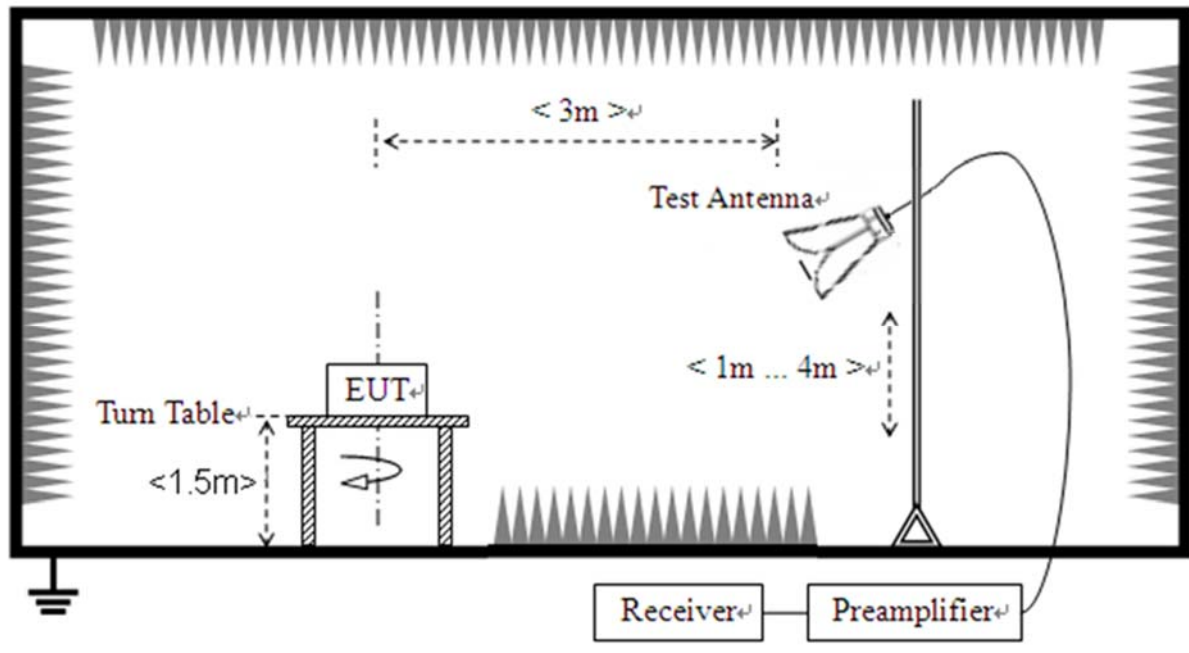



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Antenna location	Antenna Type	Coupling Method
☒ Internal ☐ External	☐ FPC Antenna ☐ Spring Antenna ☐ Ceramic Antenna ☐ Integrated Antenna ☐ Dipole Antenna ☒ PCB Antenna ☐ PIFA Antenna ☐ ABS Antenna	☐ I-PEX Connector ☐ SMA Connector ☐ RP-SMA Connector ☐ Metal Shrapnel ☒ Layout

3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e.,no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Peak Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2. Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 in this report.



3.4. Maximum Average Conducted Output Power

3.4.1. Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

3.4.2. Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.4.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.4. Test Result

Refer to Annex A.3 in this report.



3.5.6 dB Bandwidth

3.5.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.5.1.Test Procedures

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to 100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize
- h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., $RBW = 100\text{ kHz}$, $VBW \geq 3 \times RBW$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq 6\text{ dB}$.

3.5.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.3.Test Result

Refer to Annex A.4 in this report.



3.6. Conducted Spurious Emissions and Band Edge

3.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2. Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.5 and A.6 in this report.

3.7. Power Spectral Density

3.7.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.7.2. Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to 1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW

3.7.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.4. Test Result

Refer to Annex A.7 in this report.

3.8. Conducted Emission

3.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.8.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10.

Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.8.3. Test Result

This test case does not apply this kind of EUT.



3.9. Restricted Frequency Bands

3.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.9.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.9.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4. Test Result

Refer to Annex A.8 in this report.

3.10. Radiated Emission

3.10.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2:For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.10.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.10.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.10.4.Test Result


Refer to Annex A.9 in this report.




Annex A Test Data and Result

A.1. Duty Cycle of Test Signal


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	63.36	1.98	2.53
NVNT	BLE 1M	2440	Ant1	63.44	1.98	2.52
NVNT	BLE 1M	2480	Ant1	63.44	1.98	2.52

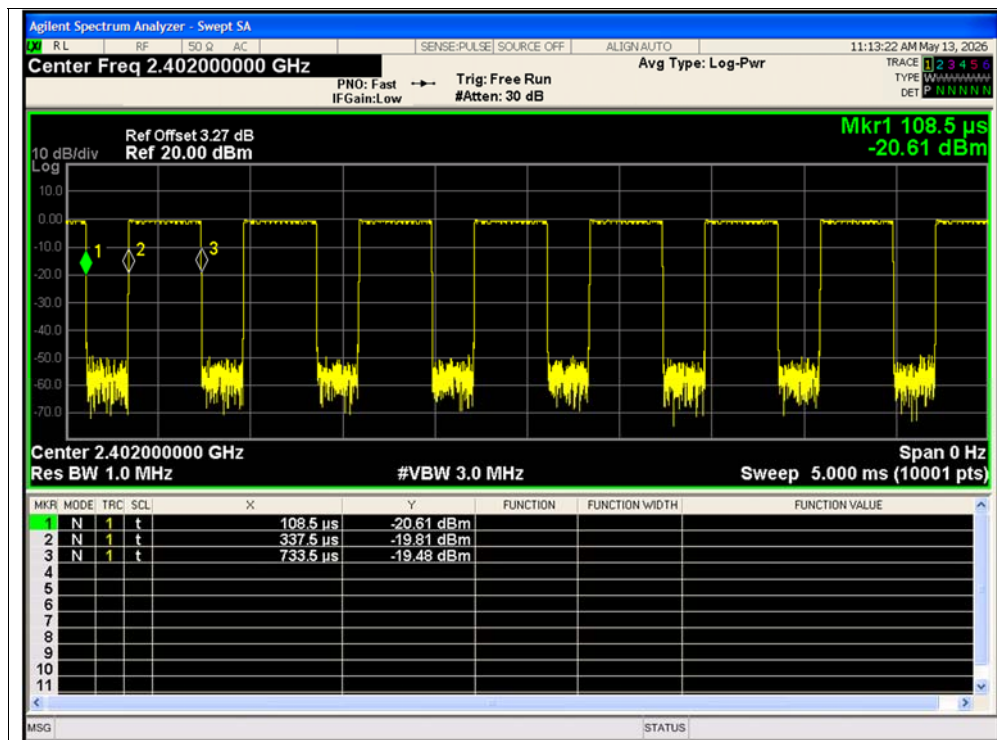

Duty Cycle NVNT BLE 1M 2402MHz Ant1

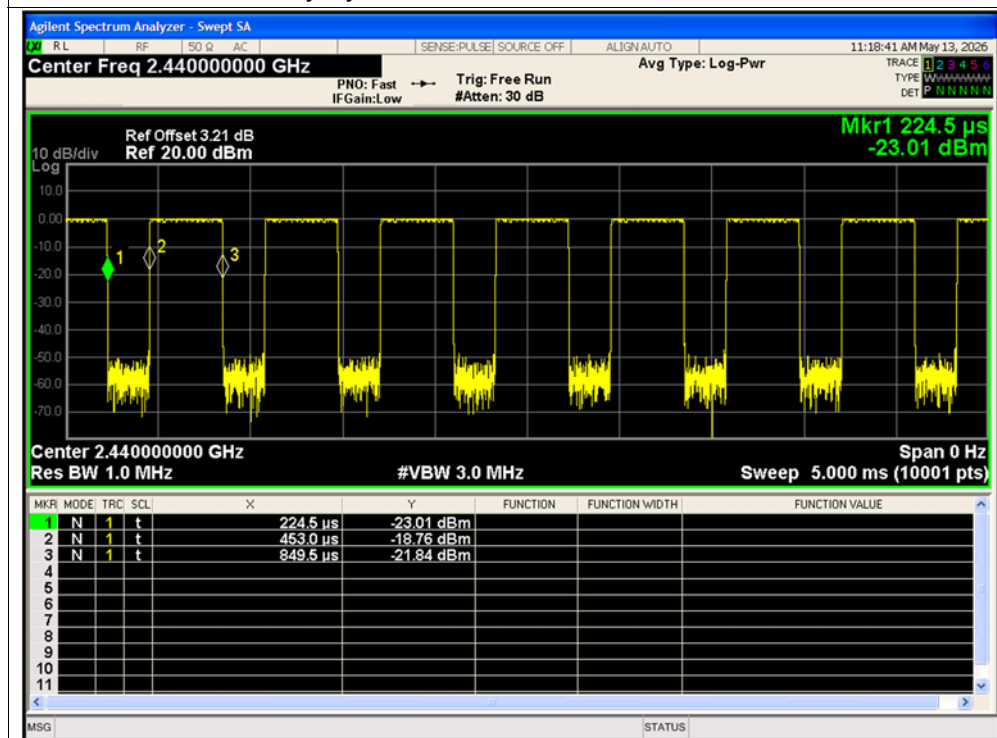


Duty Cycle NVNT BLE 1M 2440MHz Ant1

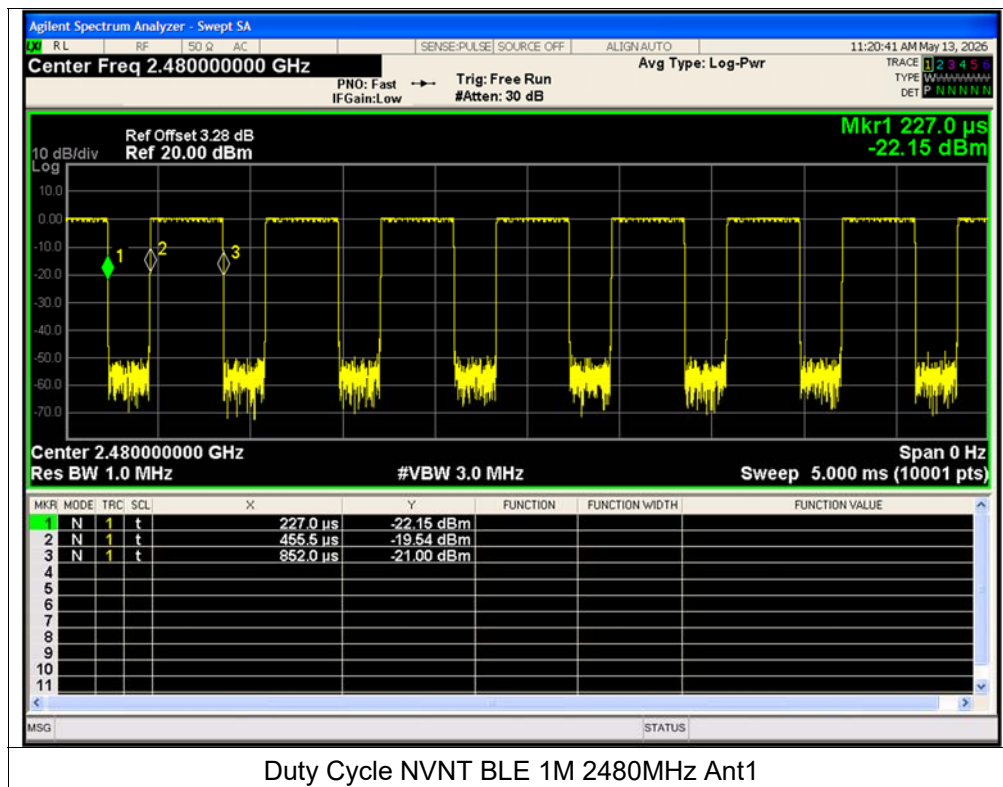


**A.2. Maximum Peak Conducted Output Power**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-0.22	0	-0.22	0.00095	30	Pass
NVNT	BLE 1M	2440	Ant1	0.34	0	0.34	0.00108	30	Pass
NVNT	BLE 1M	2480	Ant1	0.54	0	0.54	0.00113	30	Pass

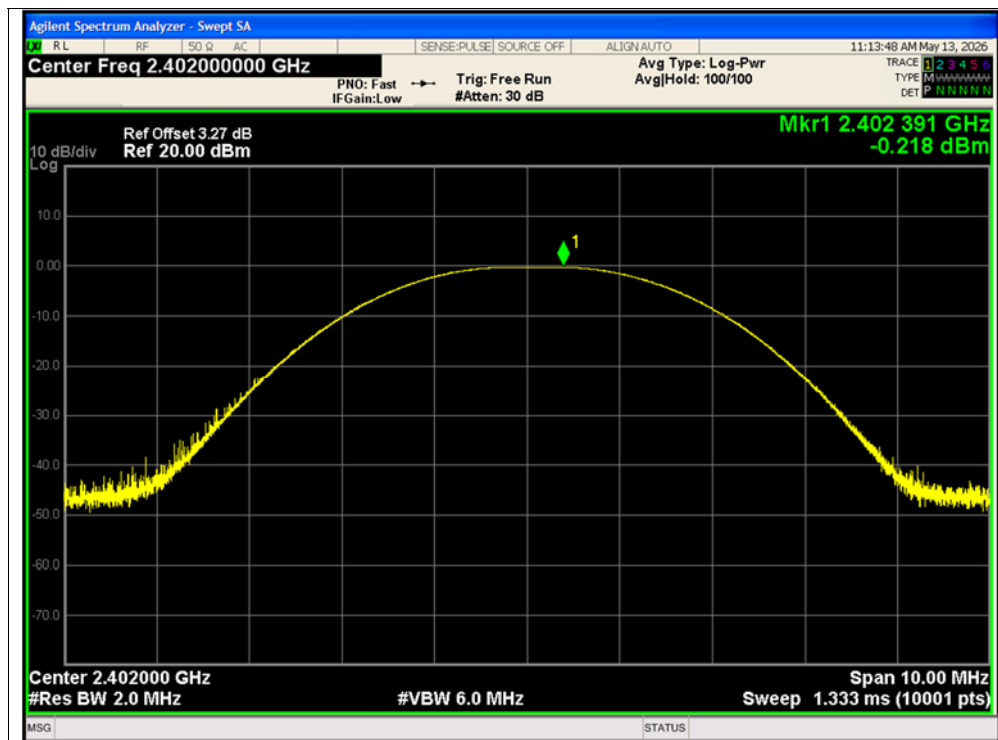

Peak Power NVNT BLE 1M 2402MHz Ant1

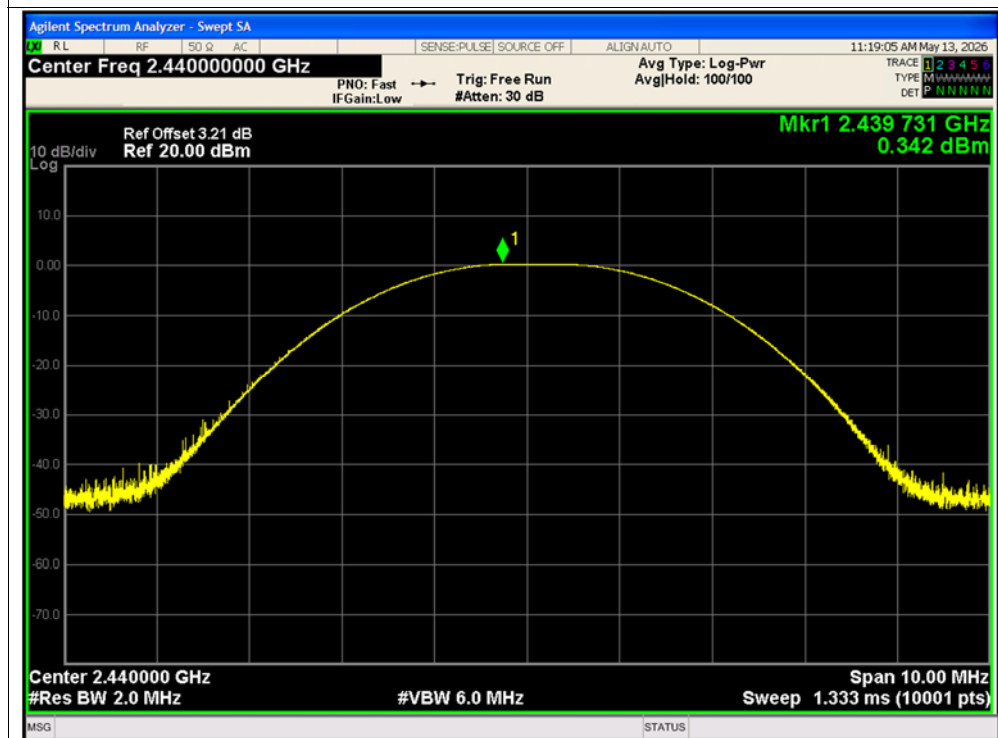


Peak Power NVNT BLE 1M 2440MHz Ant1

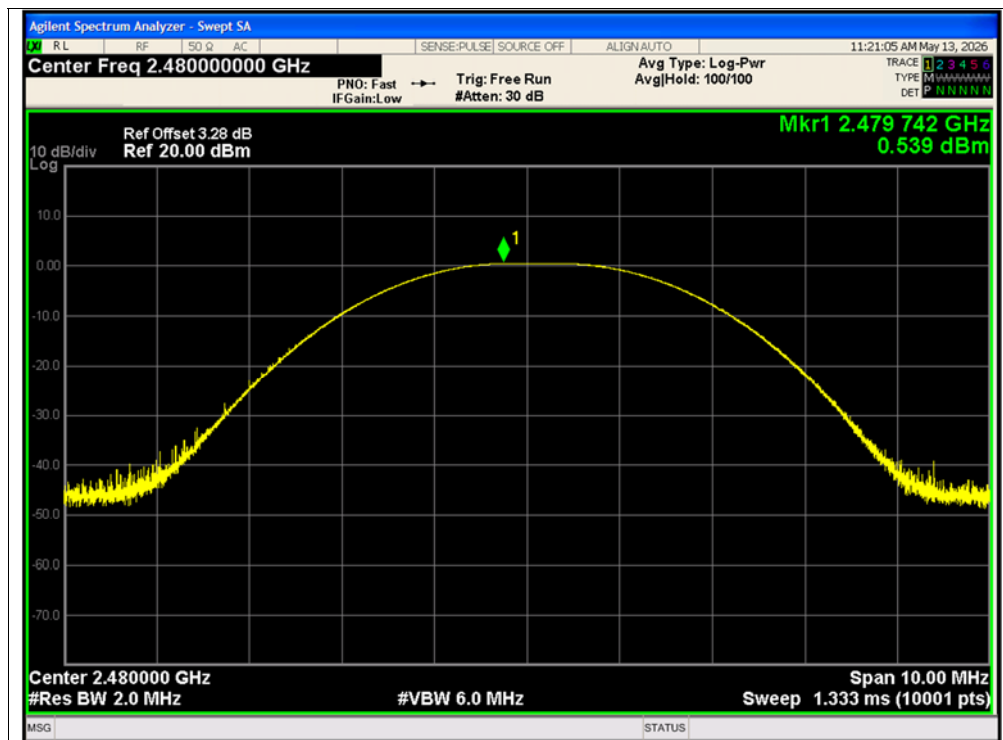


Peak Power NVNT BLE 1M 2480MHz Ant1

**A.3. Maximum Average Conducted Output Power**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-2.38	1.98	-0.4	0.00091	30	Pass
NVNT	BLE 1M	2440	Ant1	-1.98	1.98	0	0.001	30	Pass
NVNT	BLE 1M	2480	Ant1	-1.69	1.98	0.29	0.00107	30	Pass

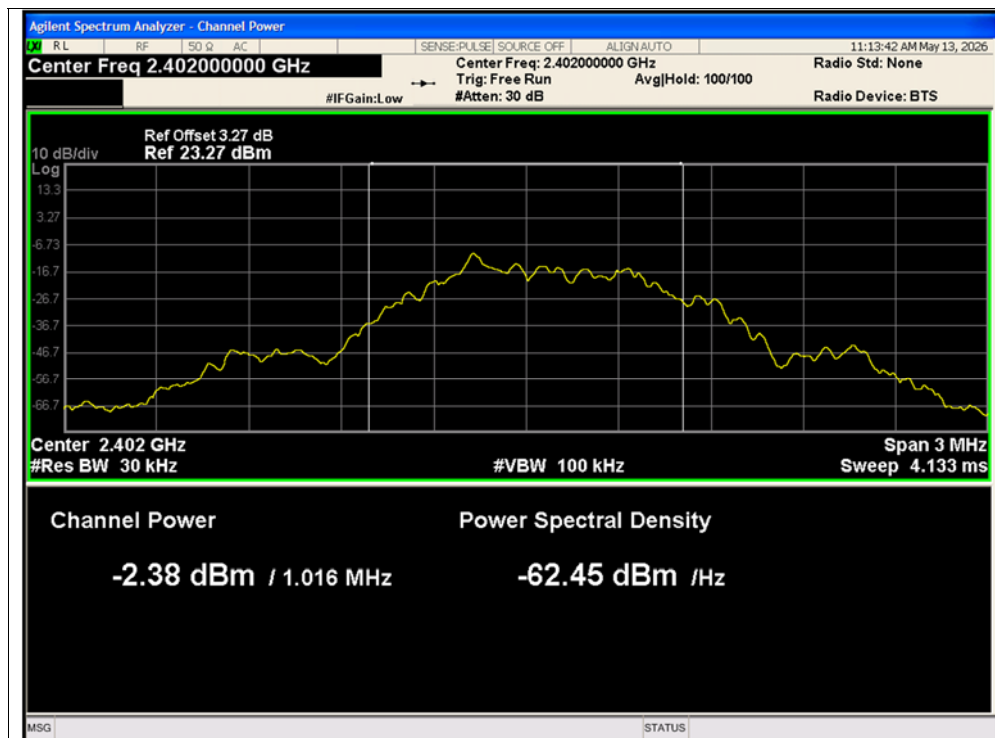

Average Power NVNT BLE 1M 2402MHz Ant1

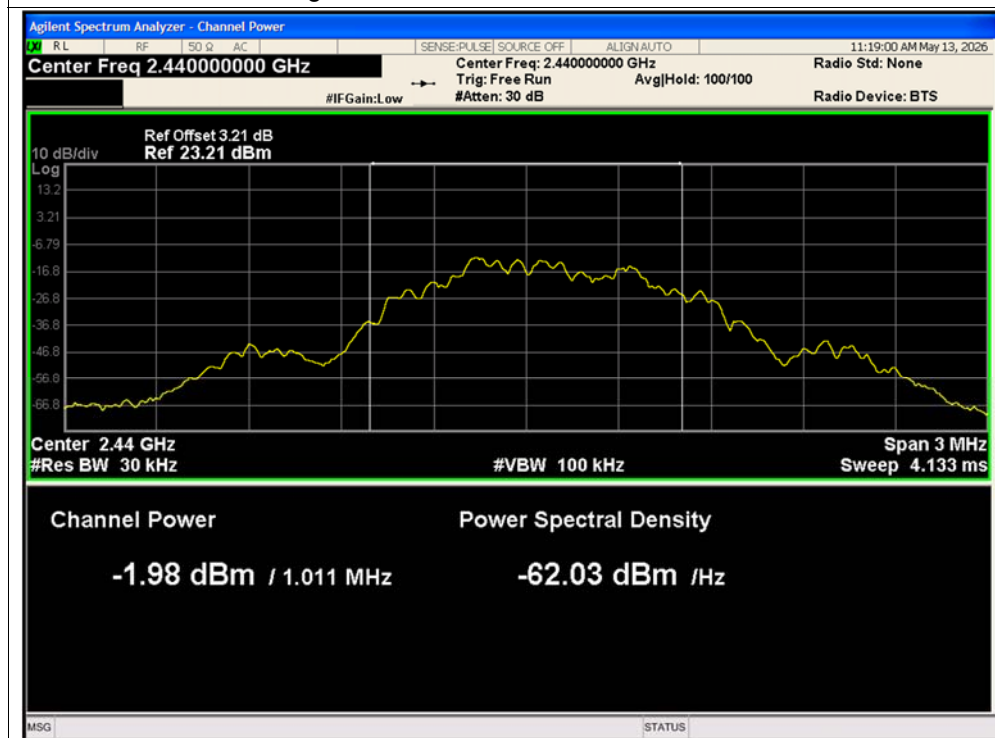


Average Power NVNT BLE 1M 2440MHz Ant1

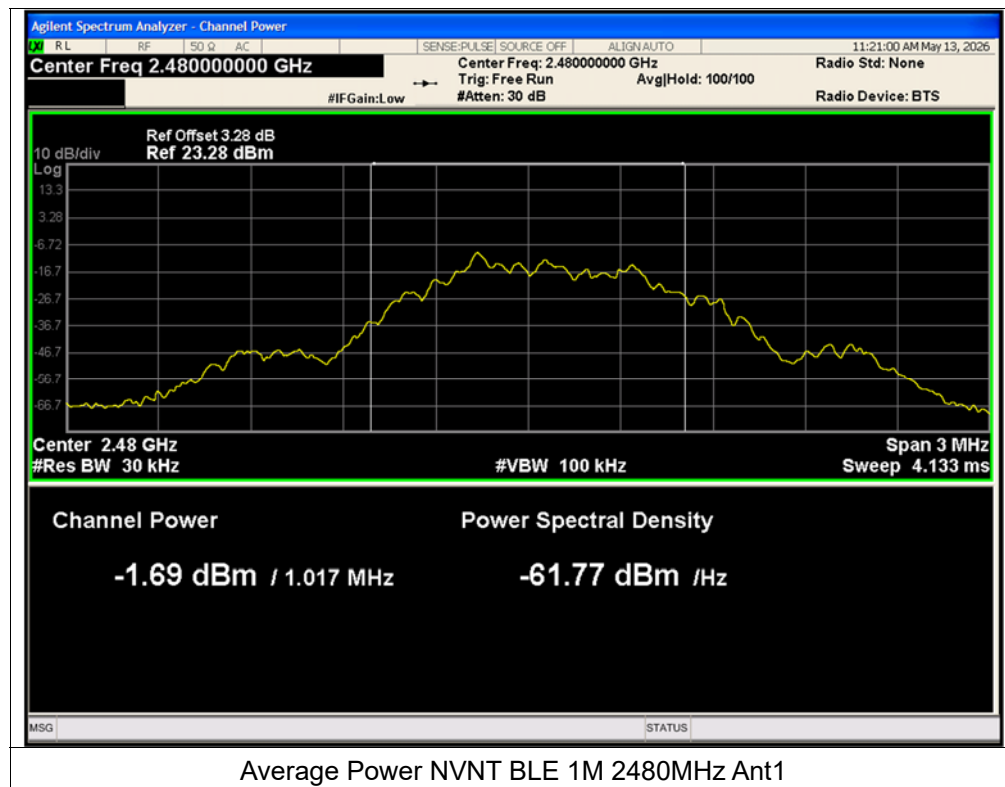


**A.4. 6 dB Bandwidth**


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.6625	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.6652	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.6488	0.5	Pass

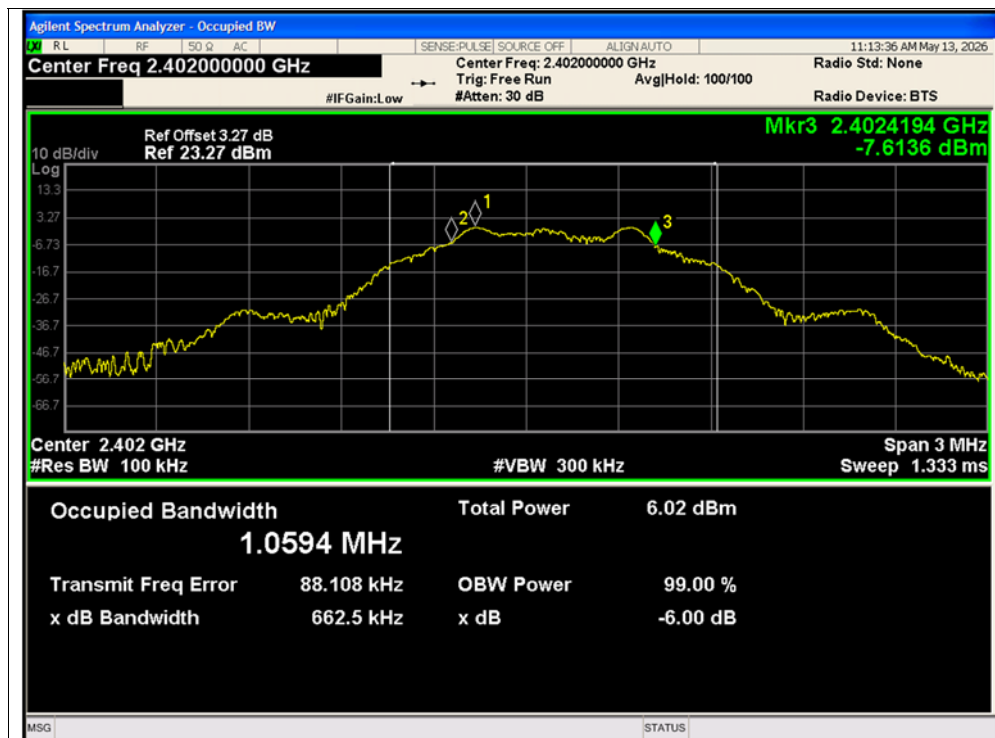

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

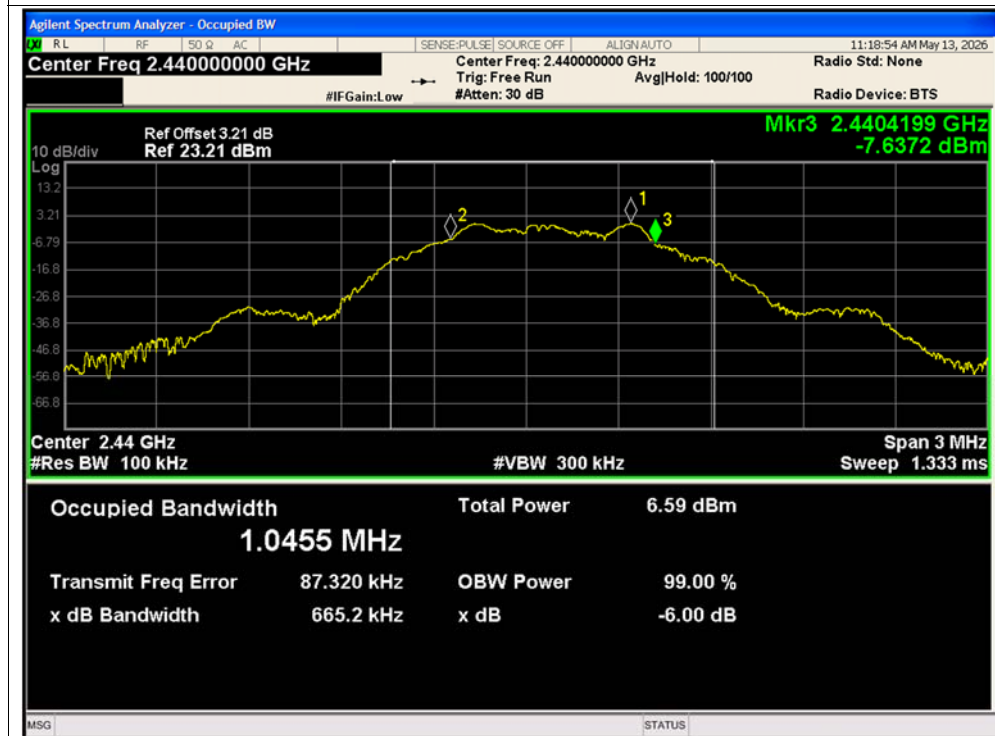


-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

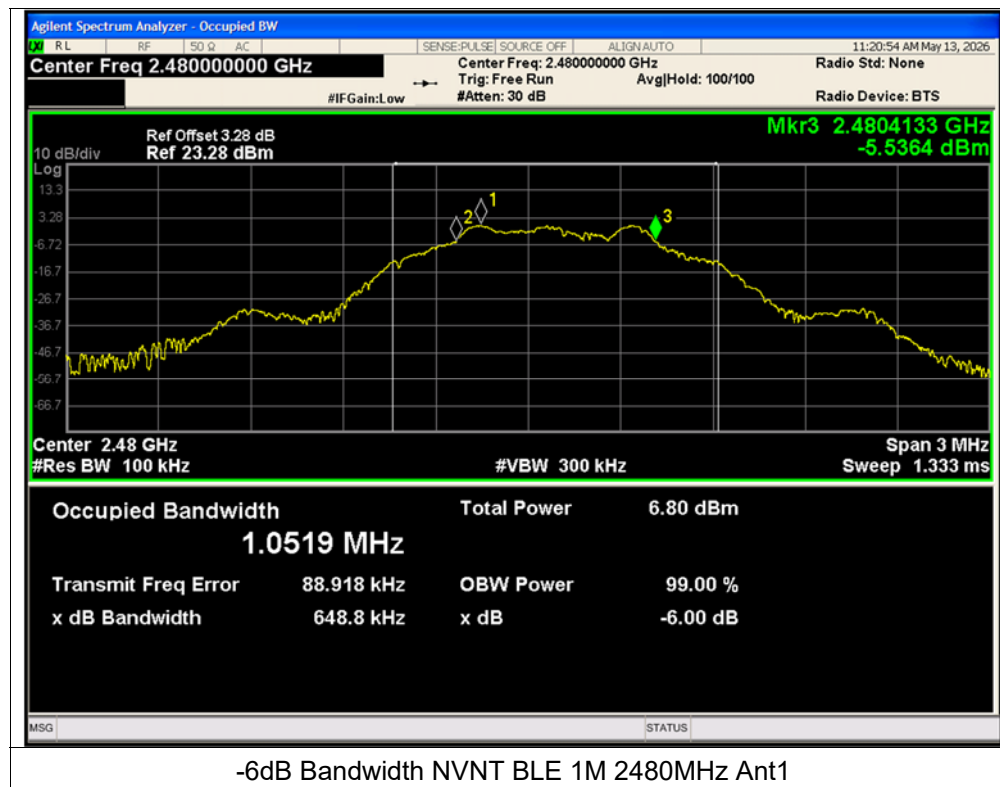


**A.5. Conducted Spurious Emissions**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-28.37	-20	Pass
NVNT	BLE 1M	2440	Ant1	-29.68	-20	Pass
NVNT	BLE 1M	2480	Ant1	-28.32	-20	Pass

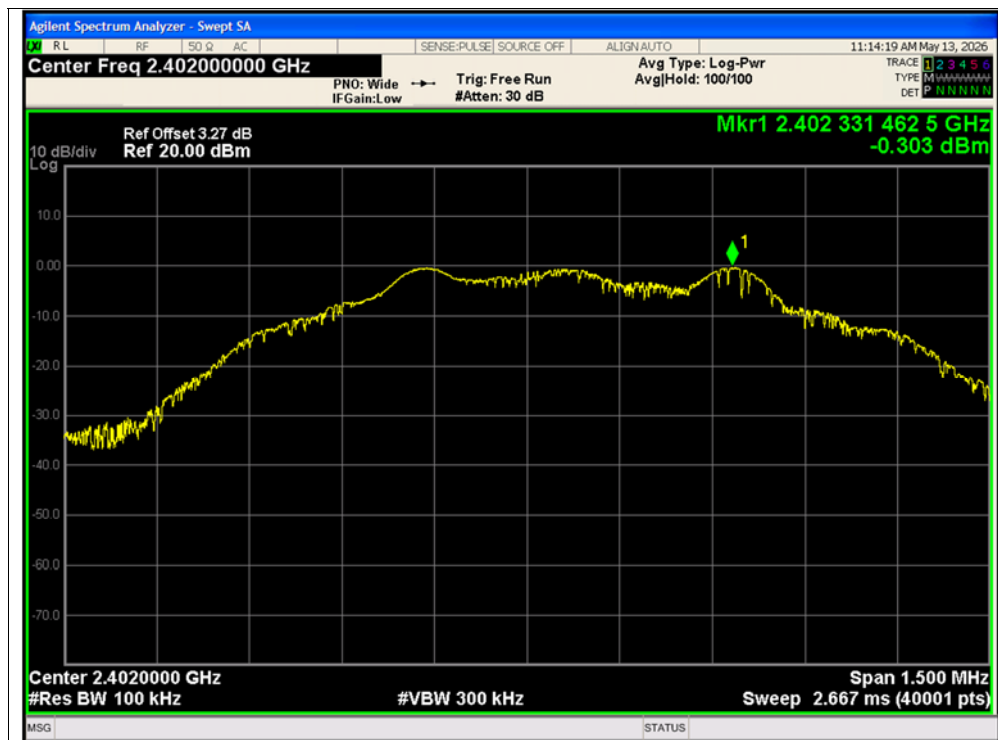


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

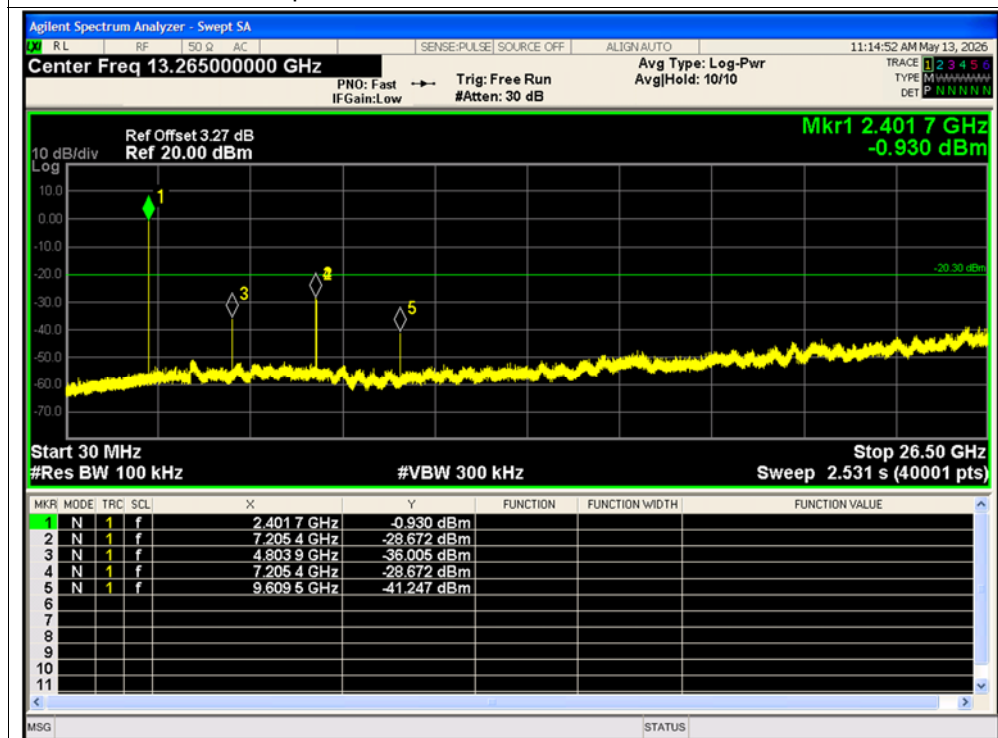


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

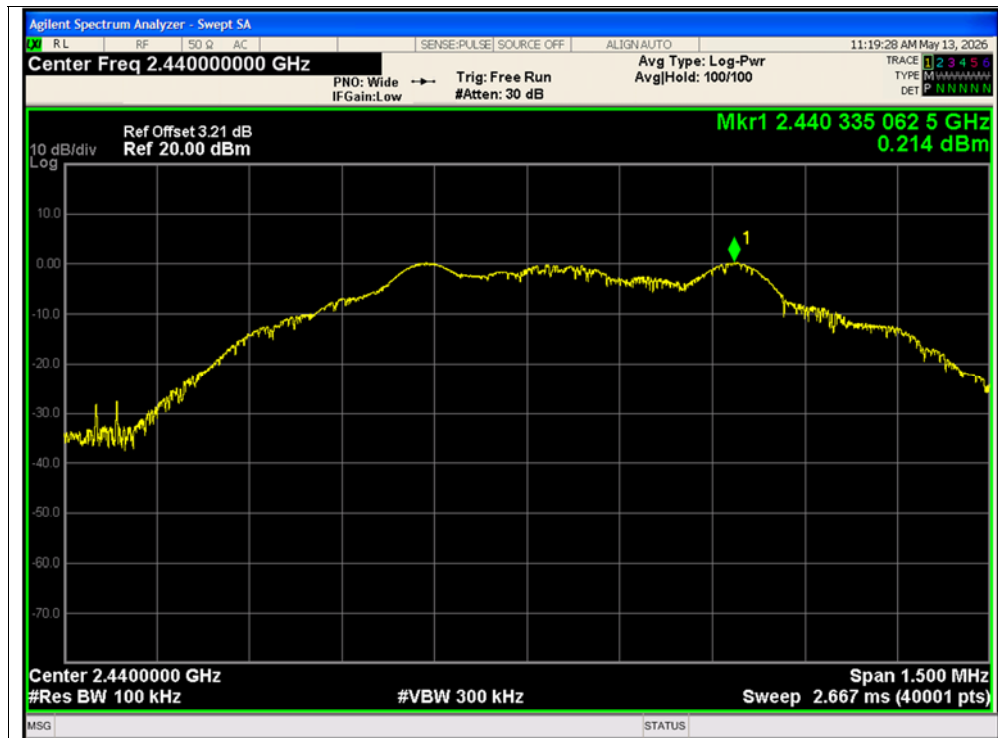


Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

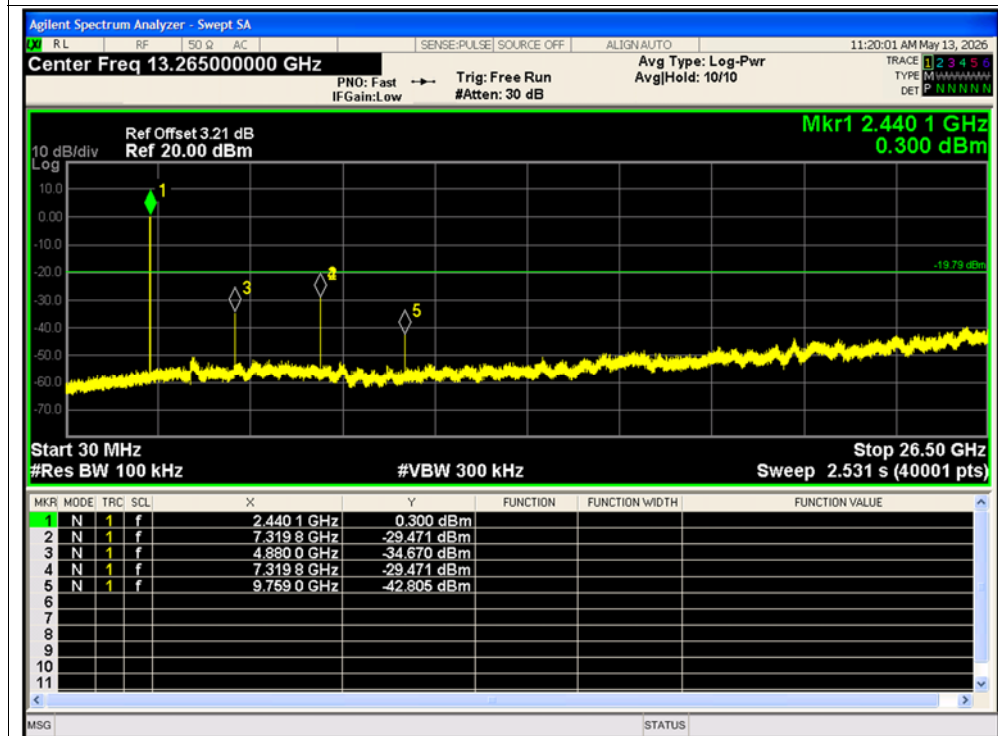

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

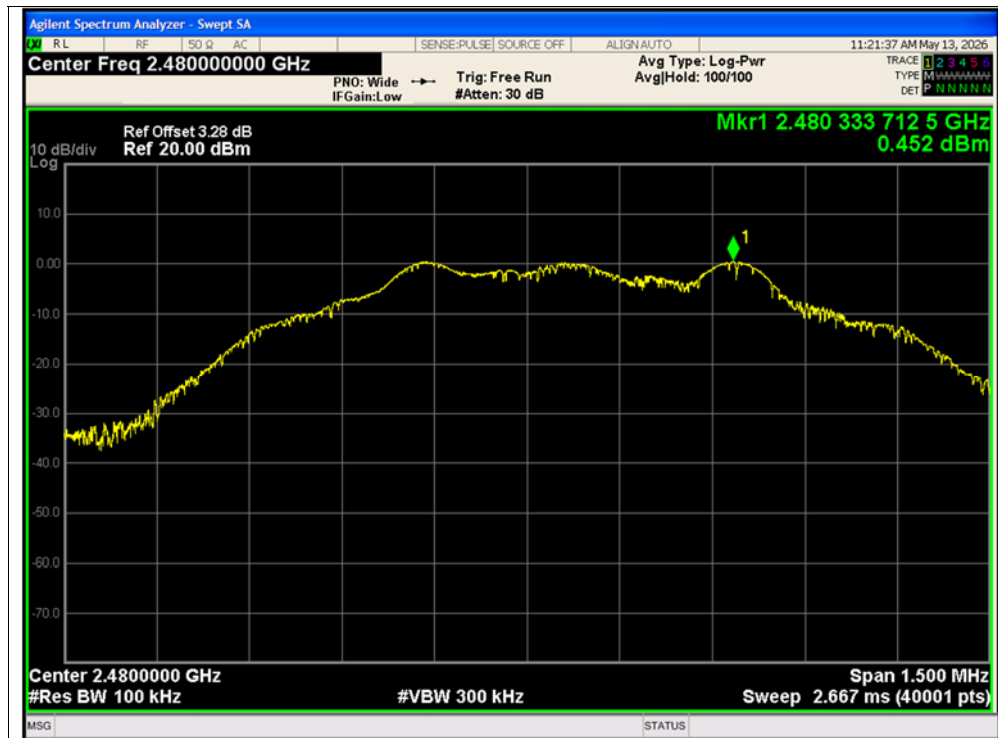

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

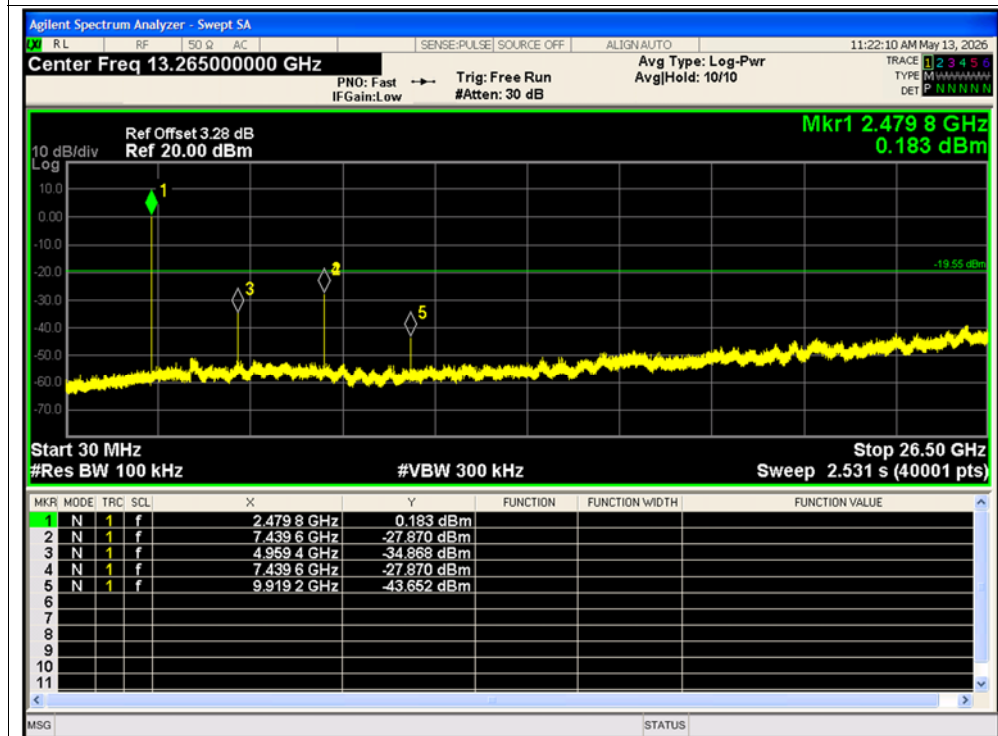


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

**A.6. Band Edge**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-47.85	-20	Pass
NVNT	BLE 1M	2480	Ant1	-50.63	-20	Pass




Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

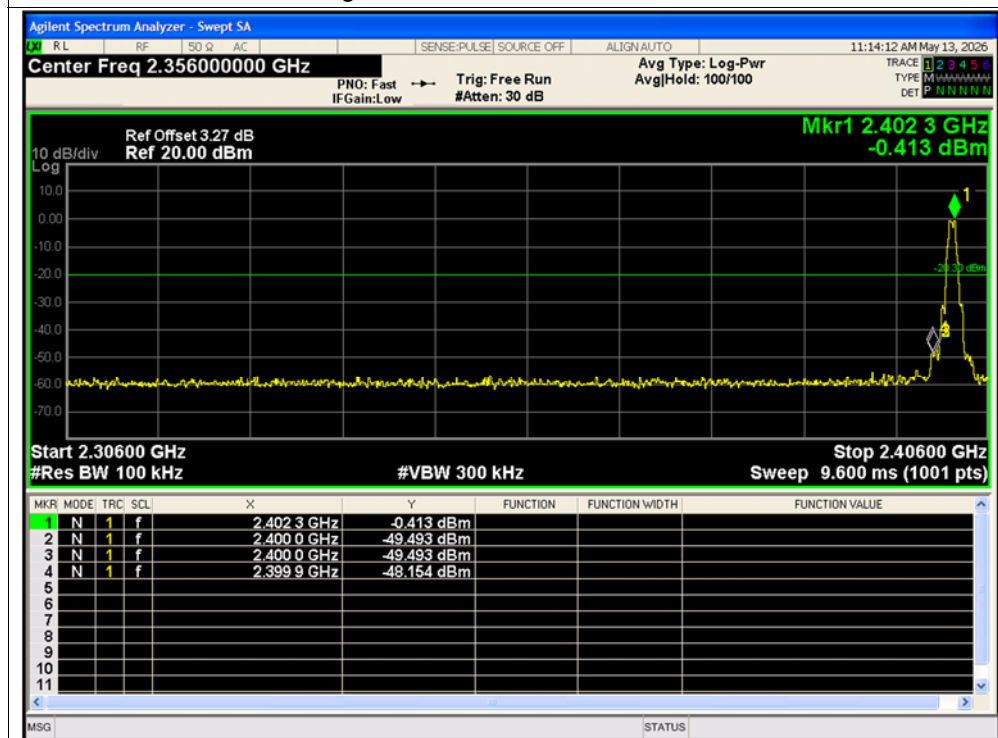

Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

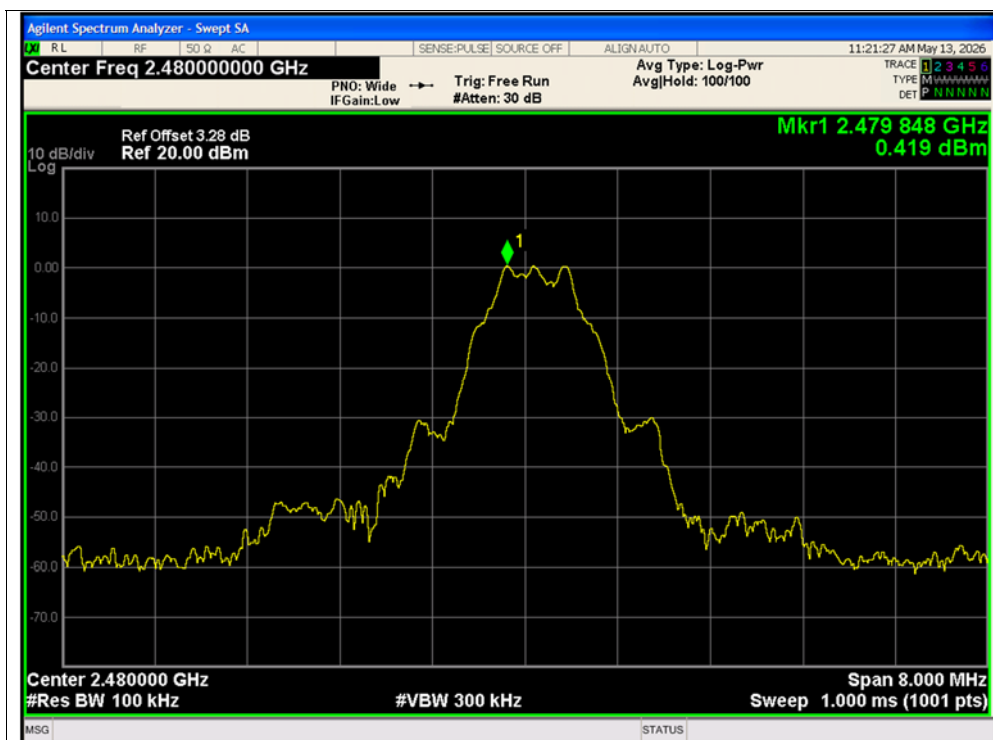


Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

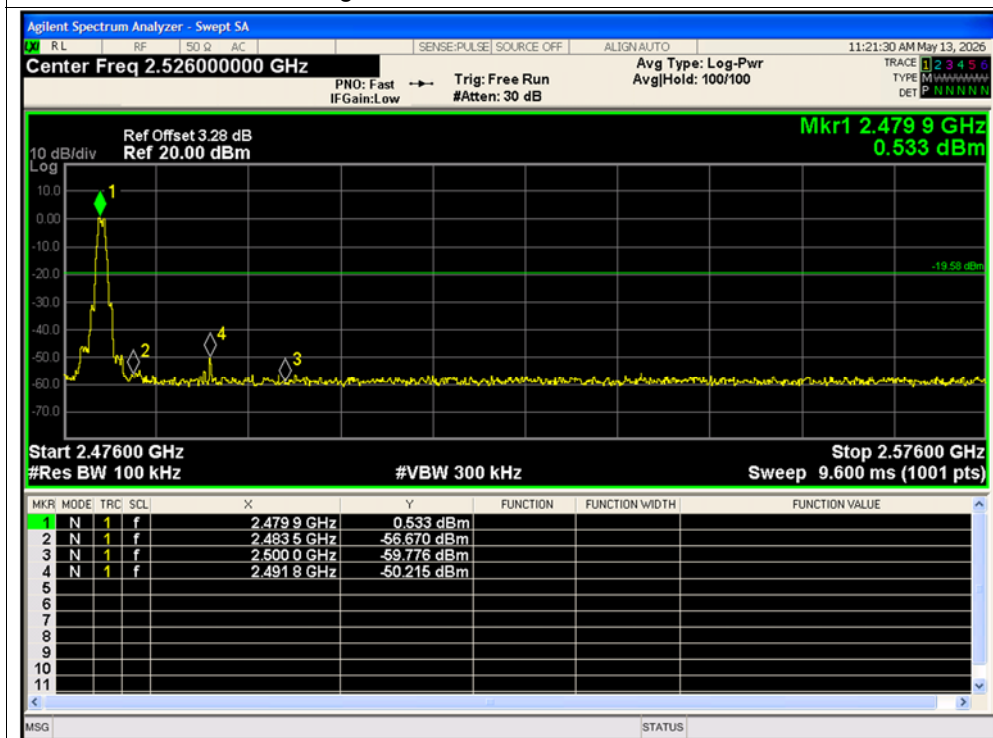


Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

**A.7. Power Spectral Density**


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-10.08	0	-10.08	8	Pass
NVNT	BLE 1M	2440	Ant1	-9.52	0	-9.52	8	Pass
NVNT	BLE 1M	2480	Ant1	-9.33	0	-9.33	8	Pass

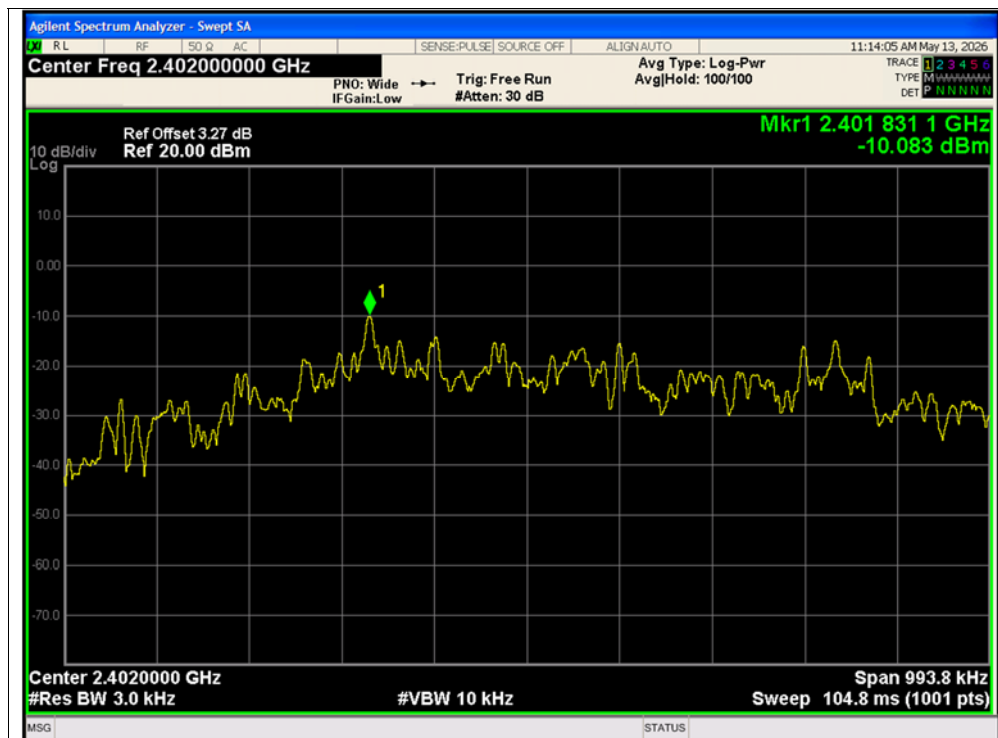

PSD NVNT BLE 1M 2402MHz Ant1

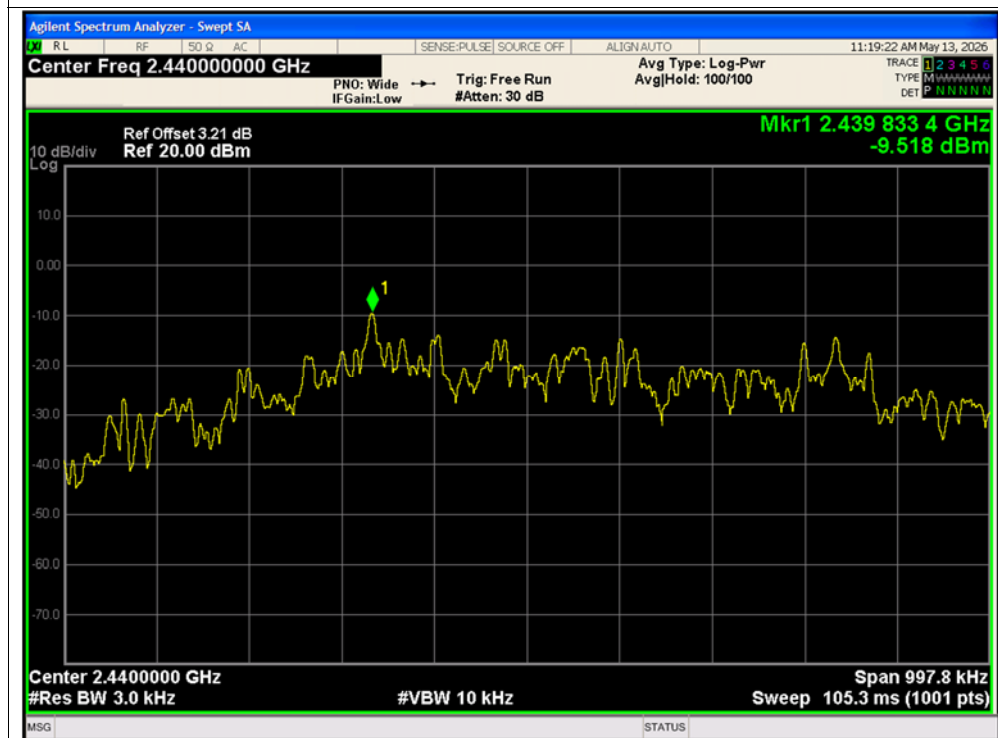


PSD NVNT BLE 1M 2440MHz Ant1

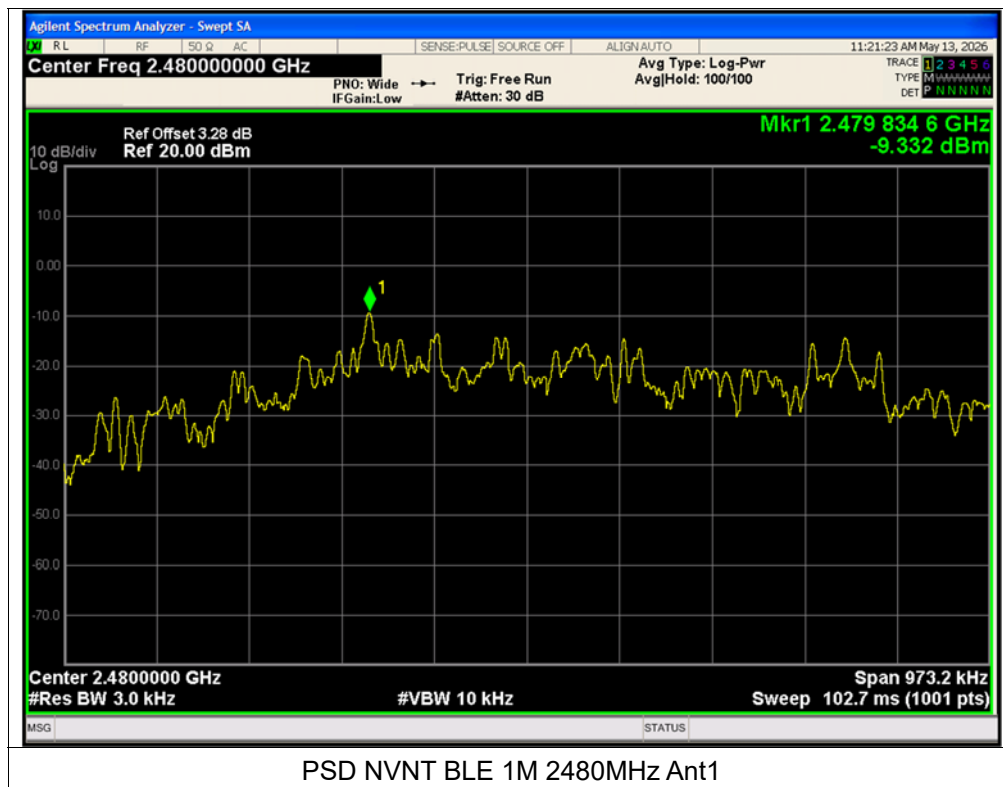

A.8. Restricted Frequency Bands

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (Horizontal) was recorded in this test report.


Plot for Channel 0

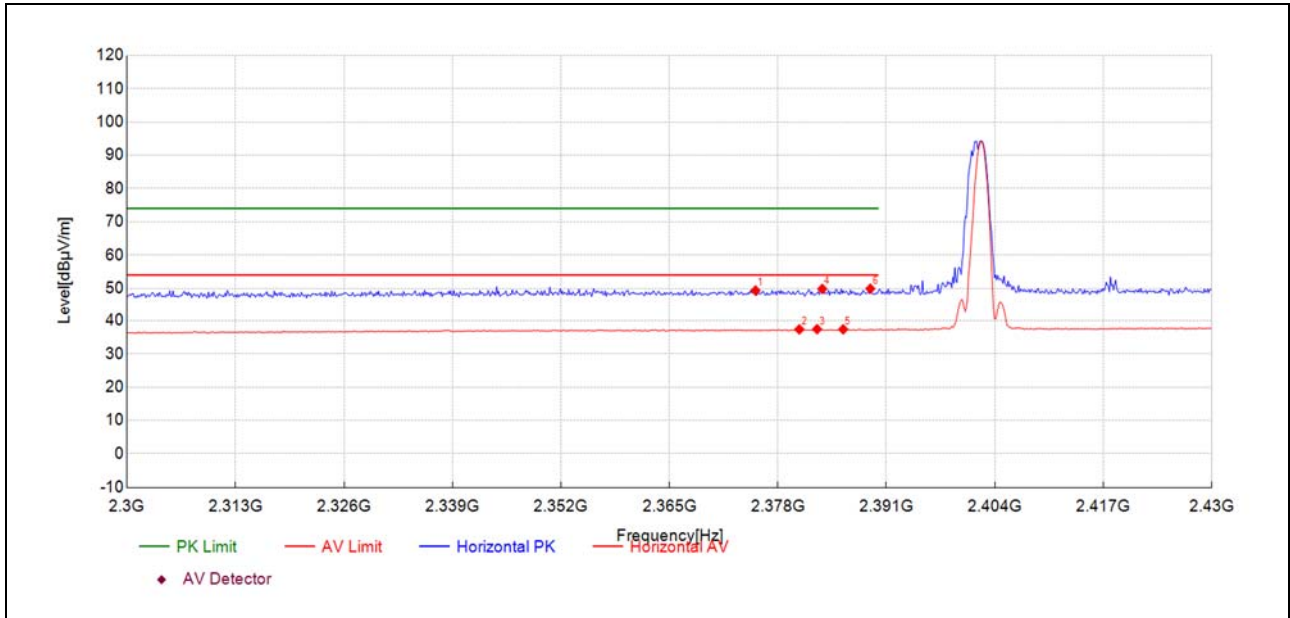

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2375.32	16.8	49.33	32.490	74.00	24.67	165	41	PK	PASS
2380.58	4.8	37.35	32.510	54.00	16.65	165	244	AV	PASS
2382.70	4.9	37.41	32.520	54.00	16.59	165	352	AV	PASS
2383.33	17.3	49.80	32.520	74.00	24.20	165	118	PK	PASS
2385.83	4.8	37.37	32.530	54.00	16.63	165	147	AV	PASS
2389.09	17.3	49.88	32.540	74.00	24.12	165	352	PK	PASS



Plot for Channel 39

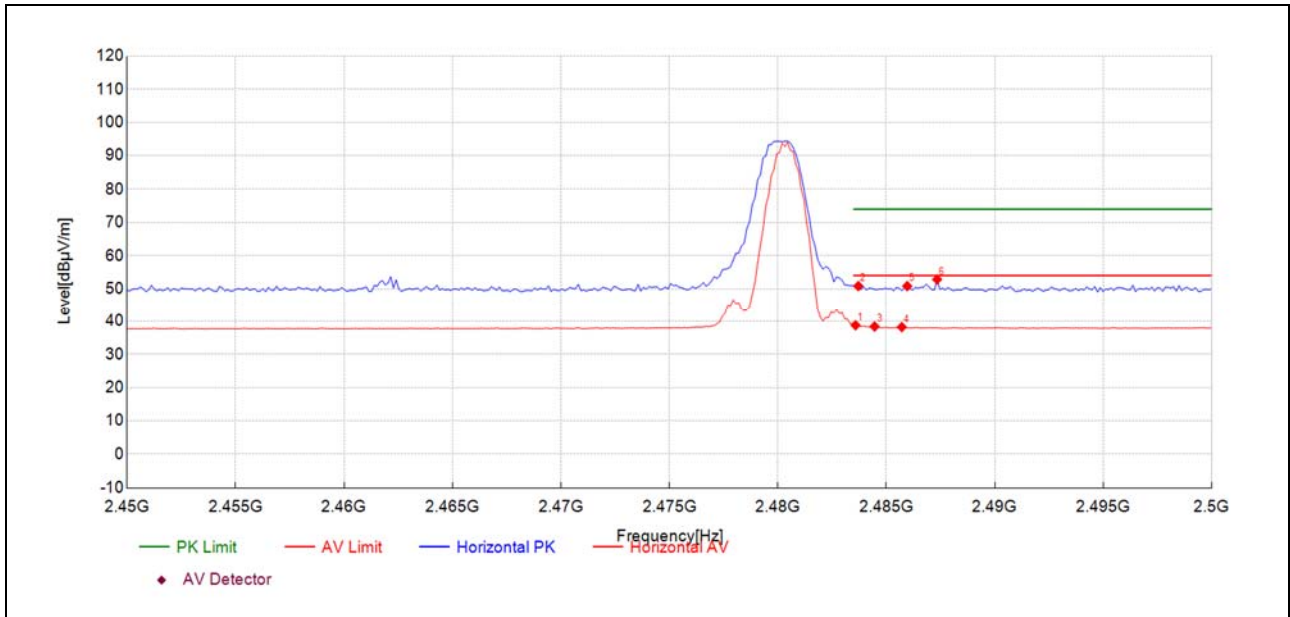

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2483.58	5.7	38.72	33.030	54.00	15.28	165	66	AV	PASS
2483.71	17.8	50.83	33.030	74.00	23.17	165	322	PK	PASS
2484.46	5.3	38.35	33.030	54.00	15.65	165	76	AV	PASS
2485.71	5.1	38.16	33.030	54.00	15.84	165	76	AV	PASS
2485.96	17.8	50.81	33.030	74.00	23.19	165	274	PK	PASS
2487.34	19.8	52.83	33.030	74.00	21.17	165	76	PK	PASS



A.9. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.




Plot for Channel 0

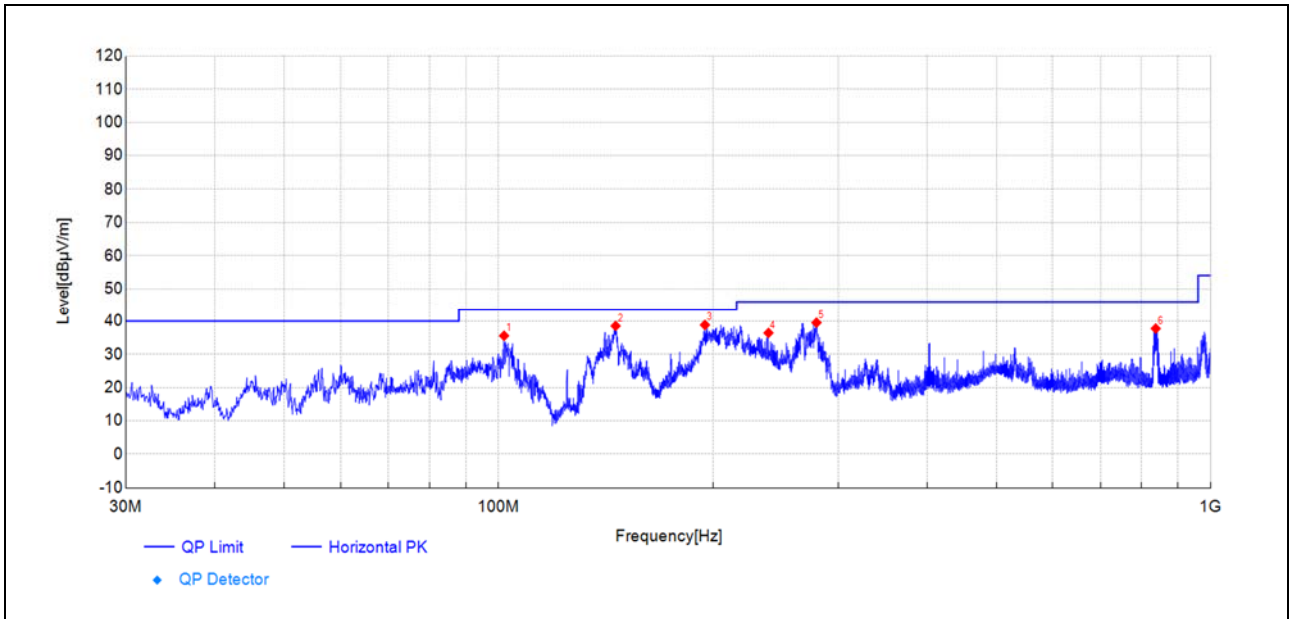


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
101.84	65.9	35.56	-30.310	43.50	7.94	165	288	PK	PASS
146.05	72.0	38.52	-33.520	43.50	4.98	165	136	PK	PASS
194.97	68.4	38.82	-29.610	43.50	4.68	165	161	PK	PASS
239.42	64.8	36.42	-28.420	46.00	9.58	165	262	PK	PASS
279.63	67.1	39.52	-27.600	46.00	6.48	165	47	PK	PASS
837.27	53.6	37.73	-15.860	46.00	8.27	165	161	PK	PASS

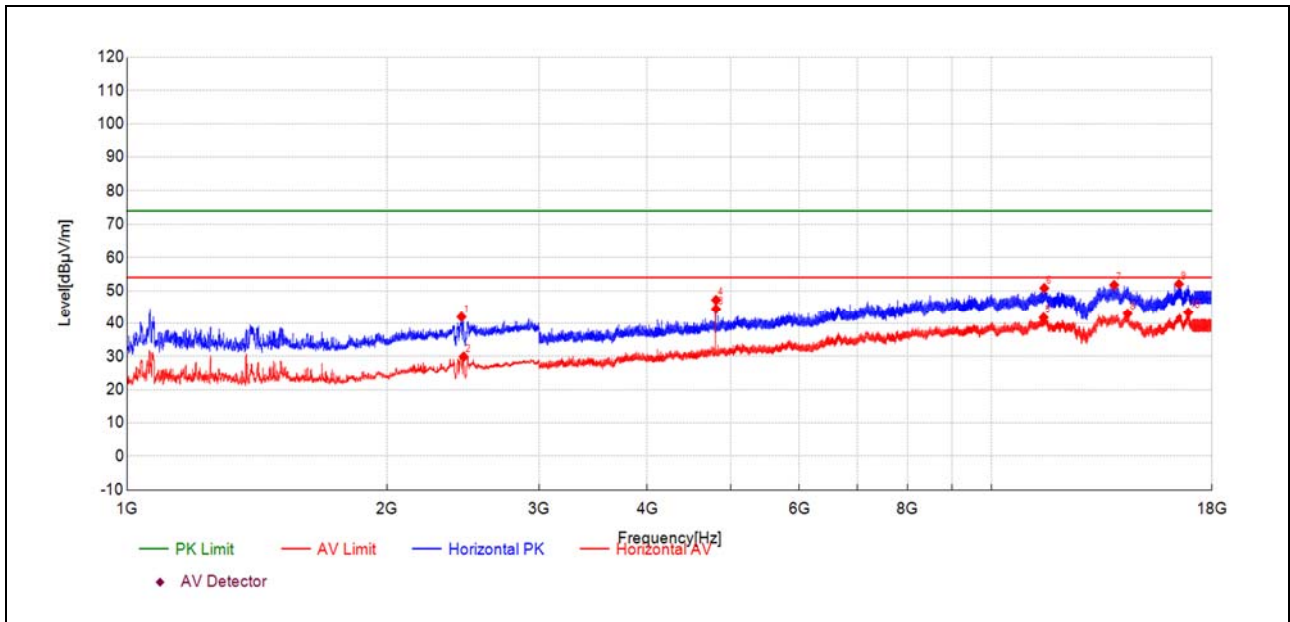


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2438.34	40.9	41.93	0.990	74.00	32.07	165	10	PK	PASS
2452.50	28.8	29.89	1.060	54.00	24.11	165	287	AV	PASS
4804.34	55.1	44.35	-10.720	54.00	9.65	165	248	AV	PASS
4804.34	57.9	47.16	-10.720	74.00	26.84	165	221	PK	PASS
11500.96	39.1	41.72	2.650	54.00	12.28	165	170	AV	PASS
11521.10	48.1	50.76	2.700	74.00	23.24	165	0	PK	PASS
13881.31	47.0	51.70	4.740	74.00	22.30	165	43	PK	PASS
14387.04	38.0	42.97	4.930	54.00	11.03	165	43	AV	PASS
16498.67	46.2	52.03	5.790	74.00	21.97	165	196	PK	PASS
16911.40	36.3	43.32	7.040	54.00	10.68	165	1	AV	PASS

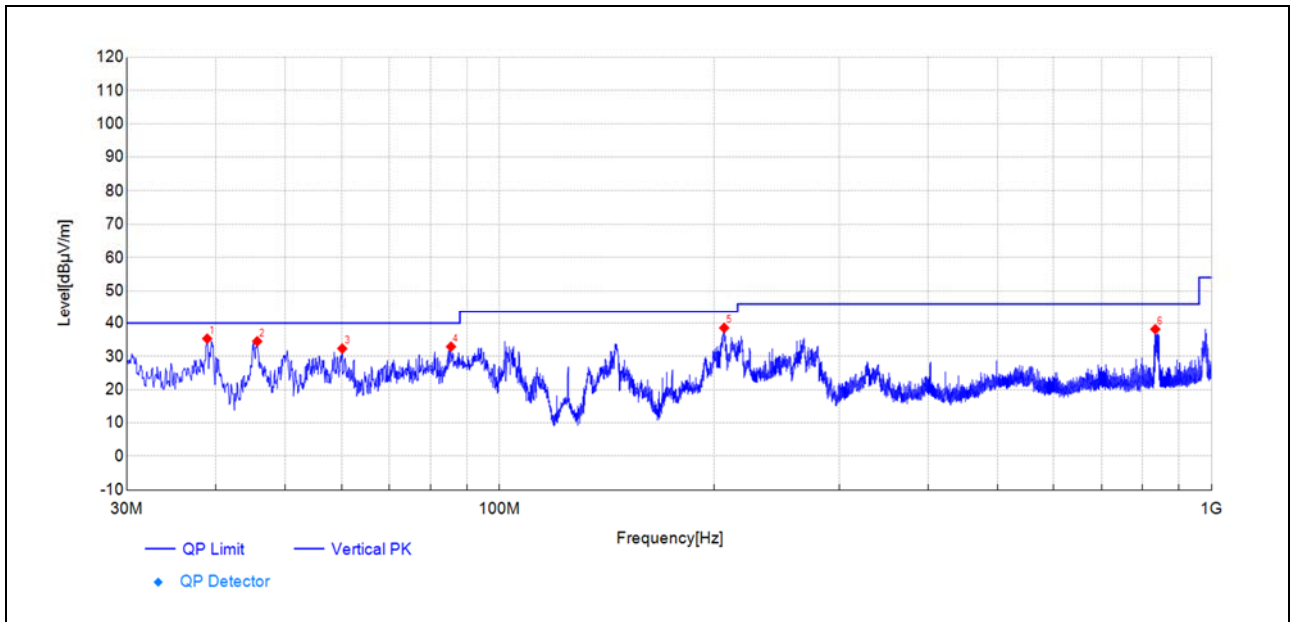

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
38.88	64.8	35.32	-29.460	40.00	4.68	165	134	PK	PASS
45.70	62.8	34.50	-28.320	40.00	5.50	165	0	PK	PASS
60.16	63.3	32.32	-30.970	40.00	7.68	165	261	PK	PASS
85.50	66.7	32.90	-33.780	40.00	7.10	165	249	PK	PASS
206.79	68.6	38.55	-30.050	43.50	4.95	165	349	PK	PASS
833.44	54.1	38.15	-15.930	46.00	7.85	165	84	PK	PASS

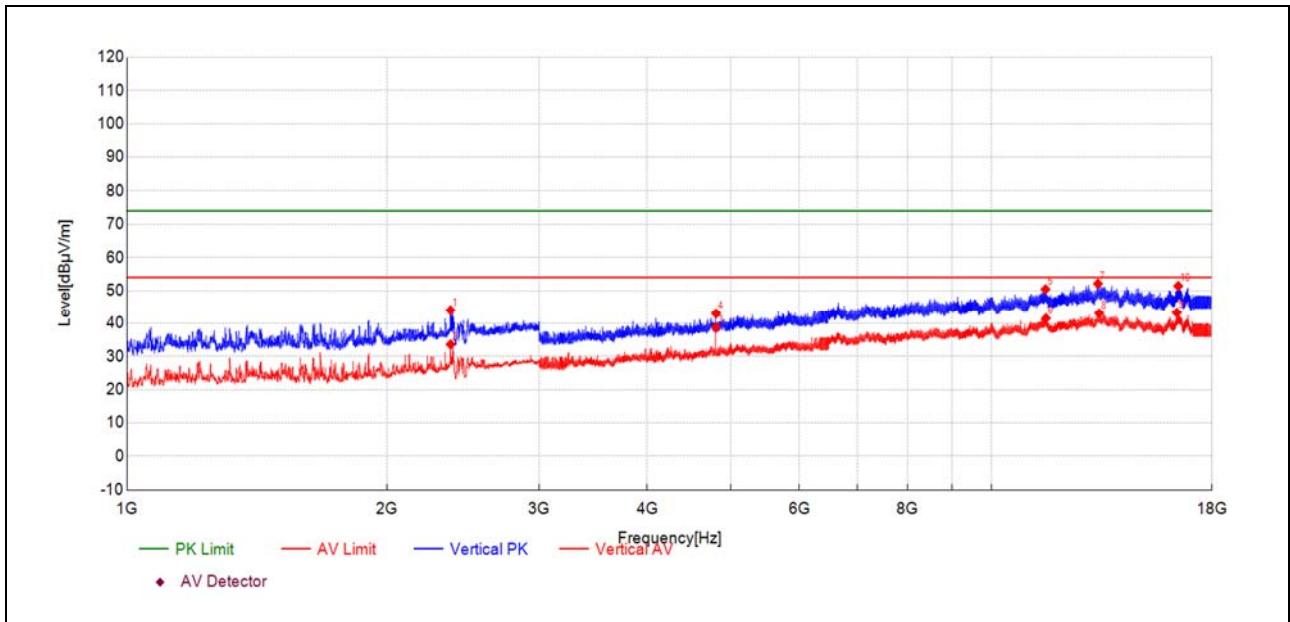


(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2368.01	43.6	44.00	0.420	74.00	30.00	165	111	PK	PASS
2368.50	33.2	33.58	0.430	54.00	20.42	165	111	AV	PASS
4804.77	49.4	38.72	-10.710	54.00	15.28	165	44	AV	PASS
4804.77	53.7	43.02	-10.710	74.00	30.98	165	19	PK	PASS
11558.82	47.6	50.41	2.780	74.00	23.59	165	299	PK	PASS
11573.82	38.7	41.50	2.810	54.00	12.50	165	249	AV	PASS
13292.87	46.7	52.09	5.410	74.00	21.91	165	349	PK	PASS
13337.01	37.8	43.04	5.200	54.00	10.96	165	273	AV	PASS
16401.38	38.2	43.27	5.080	54.00	10.73	165	19	AV	PASS
16464.38	45.8	51.38	5.540	74.00	22.62	165	199	PK	PASS




Plot for Channel 19

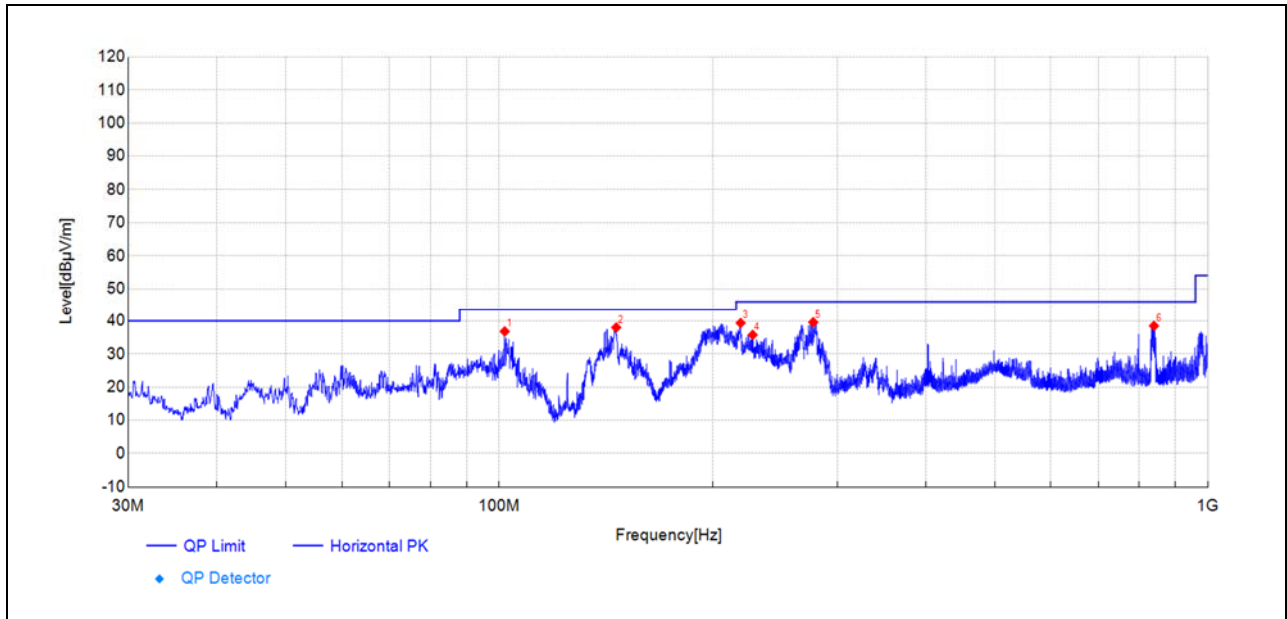


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
101.84	67.1	36.81	-30.310	43.50	6.69	165	275	PK	PASS
146.29	71.5	37.99	-33.500	43.50	5.51	165	138	PK	PASS
219.13	68.6	39.35	-29.270	46.00	6.65	165	312	PK	PASS
227.89	64.6	35.76	-28.810	46.00	10.24	165	161	PK	PASS
277.39	67.2	39.59	-27.650	46.00	6.41	165	62	PK	PASS
838.91	54.3	38.48	-15.830	46.00	7.52	165	161	PK	PASS

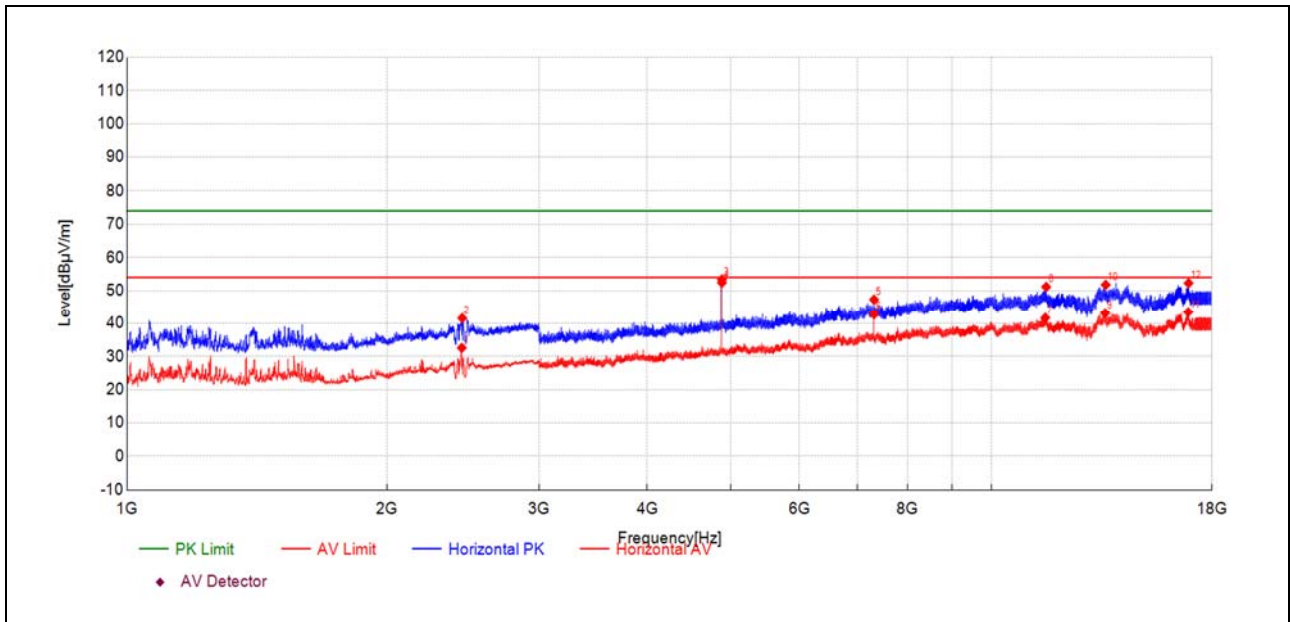


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2440.29	31.5	32.54	1.010	-	-	165	255	AV	NA
2443.22	40.5	41.54	1.030	-	-	165	341	PK	NA
4880.63	63.4	53.40	-10.000	74.00	20.60	165	197	PK	PASS
4880.63	62.4	52.41	-10.000	54.00	1.59	165	197	AV	PASS
7320.98	51.0	47.28	-3.680	74.00	26.72	165	46	PK	PASS
7320.98	46.4	42.74	-3.680	54.00	11.26	165	68	AV	PASS
11553.24	38.9	41.65	2.770	54.00	12.35	165	170	AV	PASS
11580.67	48.3	51.13	2.830	74.00	22.87	165	299	PK	PASS
13551.73	38.3	43.11	4.770	54.00	10.89	165	349	AV	PASS
13571.87	47.0	51.76	4.800	74.00	22.24	165	68	PK	PASS
16908.40	36.3	43.42	7.110	54.00	10.58	165	170	AV	PASS
16924.25	45.5	52.27	6.760	74.00	21.73	165	197	PK	PASS

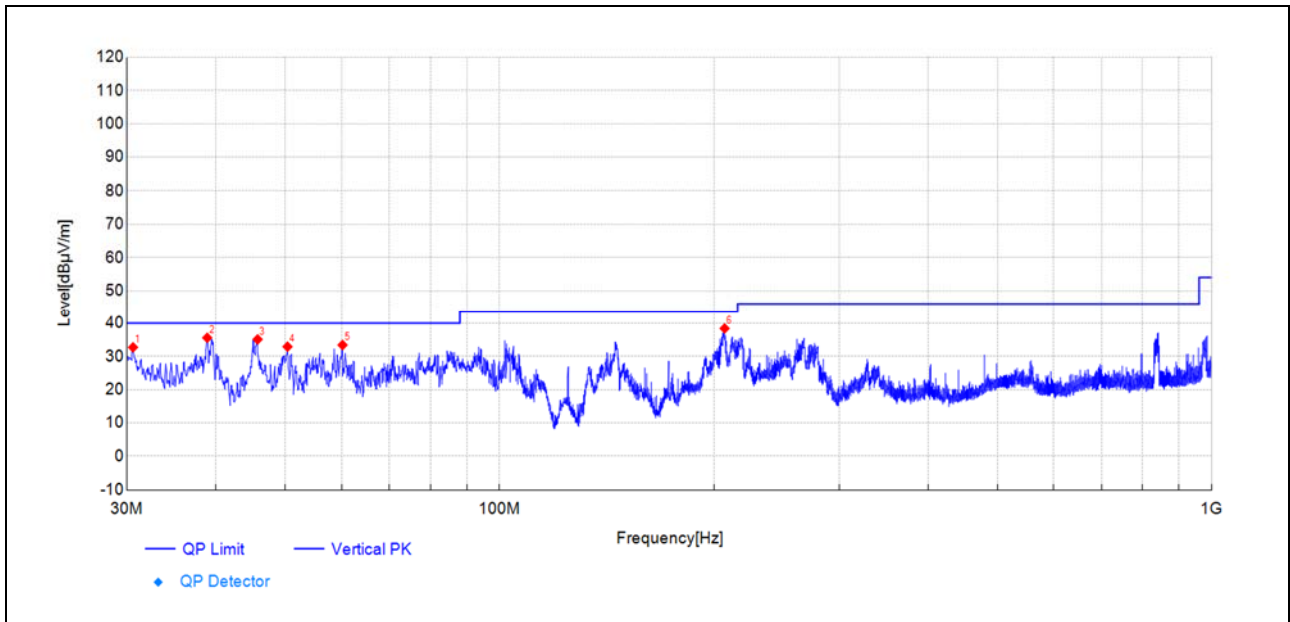

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
30.59	65.7	32.70	-32.970	40.00	7.30	165	212	PK	PASS
38.88	65.0	35.57	-29.460	40.00	4.43	165	162	PK	PASS
45.76	63.4	35.08	-28.320	40.00	4.92	165	60	PK	PASS
50.40	61.4	32.90	-28.540	40.00	7.10	165	7	PK	PASS
60.22	64.4	33.40	-30.990	40.00	6.60	165	299	PK	PASS
207.08	68.4	38.39	-30.030	43.50	5.11	165	0	PK	PASS

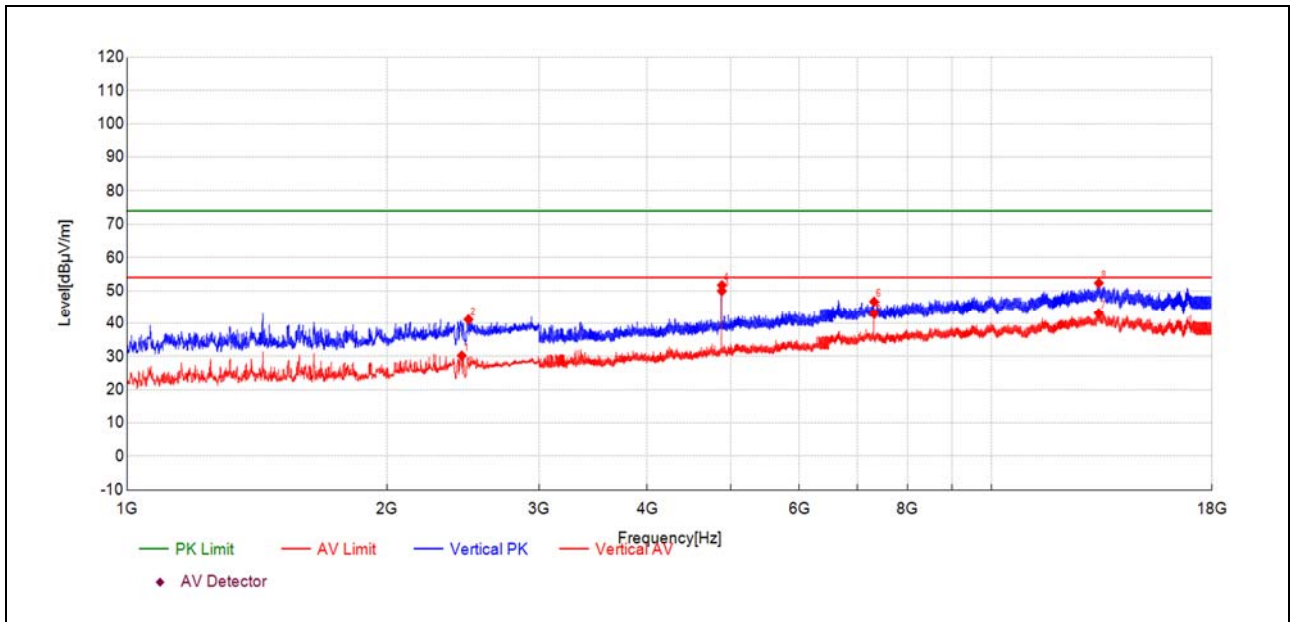


(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2440.29	29.2	30.19	1.010	-	-	165	244	AV	NA
2484.25	40.2	41.13	0.890	74.00	32.87	165	360	PK	PASS
4880.63	59.9	49.91	-10.000	54.00	4.09	165	4	AV	PASS
4880.63	61.7	51.65	-10.000	74.00	22.35	165	19	PK	PASS
7320.98	46.6	42.88	-3.680	54.00	11.12	165	42	AV	PASS
7320.98	50.3	46.66	-3.680	74.00	27.34	165	92	PK	PASS
13322.44	37.8	43.11	5.310	54.00	10.89	165	299	AV	PASS
13328.01	47.0	52.31	5.280	74.00	21.69	165	42	PK	PASS




Plot for Channel 39

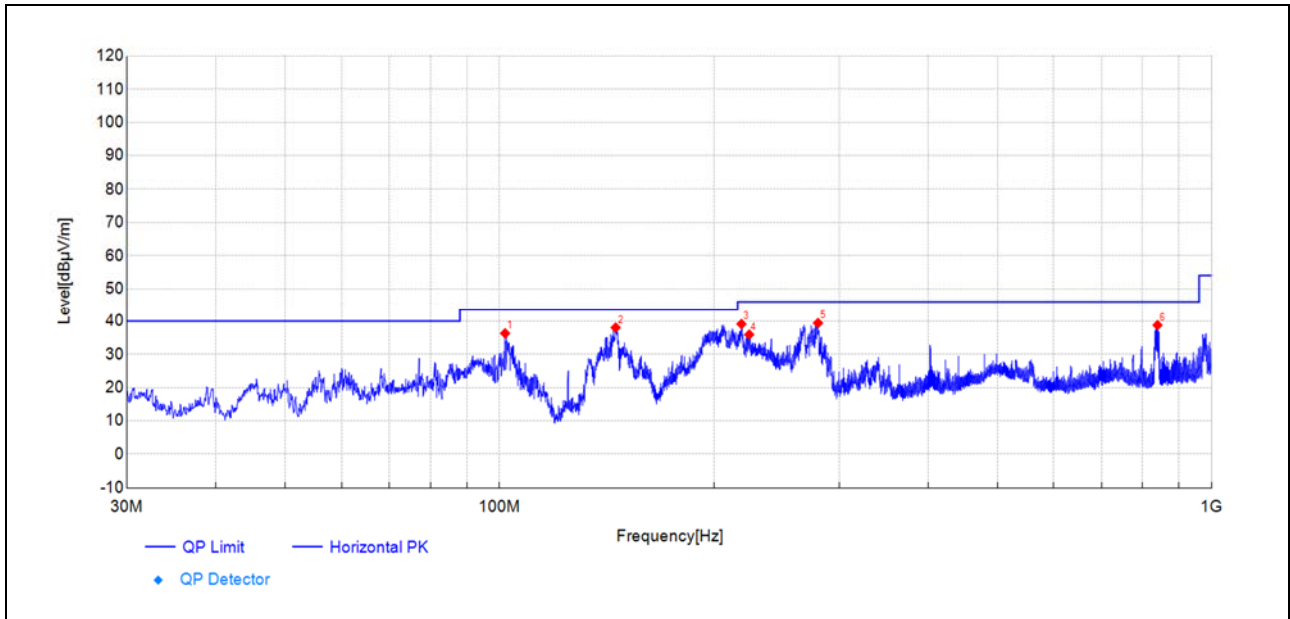


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
101.84	66.6	36.28	-30.310	43.50	7.22	165	263	PK	PASS
145.58	71.6	38.02	-33.530	43.50	5.48	165	136	PK	PASS
218.66	68.4	39.10	-29.310	46.00	6.90	165	325	PK	PASS
224.25	64.9	35.91	-29.000	46.00	10.09	165	124	PK	PASS
280.10	67.0	39.39	-27.590	46.00	6.61	165	49	PK	PASS
839.32	54.6	38.77	-15.820	46.00	7.23	165	161	PK	PASS

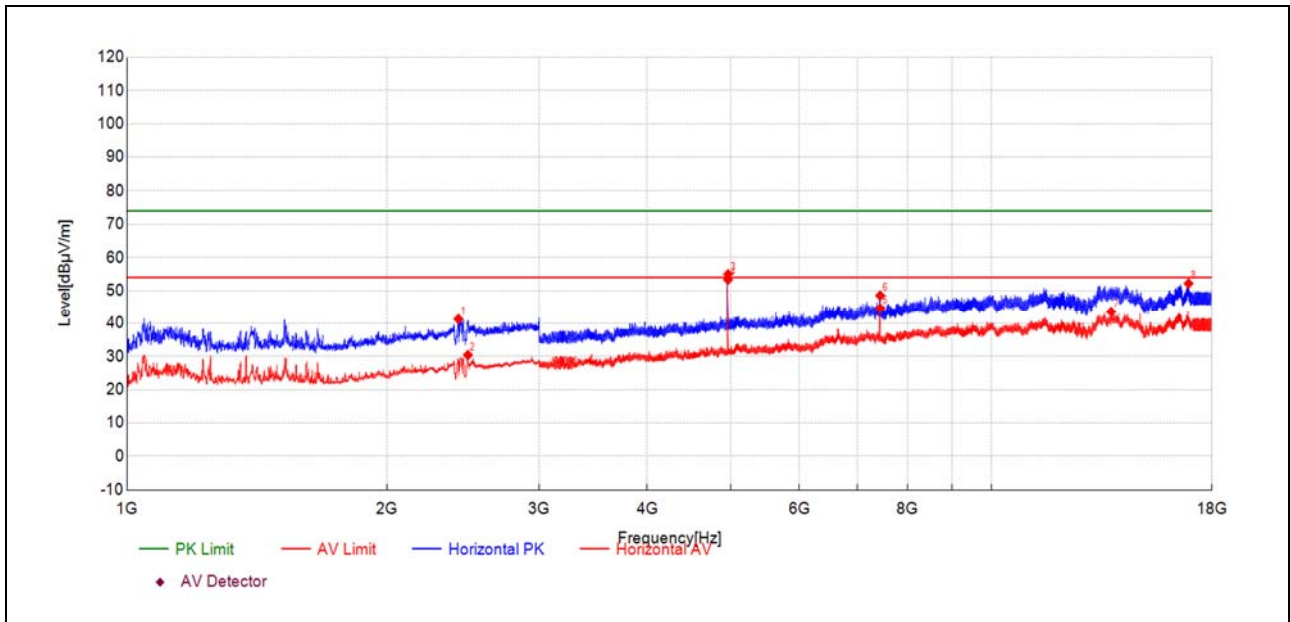


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2418.32	40.4	41.26	0.860	74.00	32.74	165	66	PK	PASS
2480.34	29.5	30.39	0.920	-	-	165	88	AV	NA
4960.34	65.1	54.96	-10.130	74.00	19.04	165	220	PK	PASS
4960.34	63.5	53.35	-10.130	54.00	0.65	165	248	AV	PASS
7440.98	49.1	44.58	-4.470	54.00	9.42	165	68	AV	PASS
7440.98	53.0	48.53	-4.470	74.00	25.47	165	68	PK	PASS
13769.45	38.3	43.55	5.250	54.00	10.45	165	44	AV	PASS
16924.25	45.4	52.17	6.760	74.00	21.83	165	68	PK	PASS

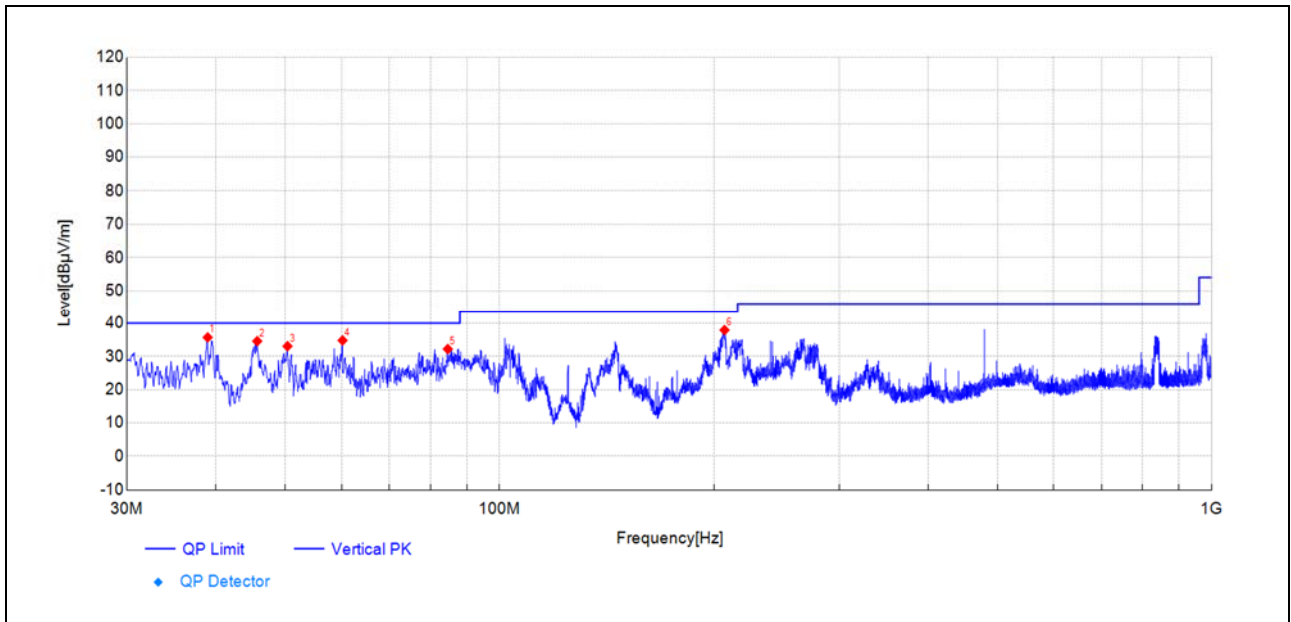

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
38.94	65.1	35.69	-29.430	40.00	4.31	165	85	PK	PASS
45.70	62.9	34.56	-28.320	40.00	5.44	165	85	PK	PASS
50.40	61.6	33.04	-28.540	40.00	6.96	165	313	PK	PASS
60.22	65.8	34.77	-30.990	40.00	5.23	165	261	PK	PASS
84.62	66.3	32.19	-34.100	40.00	7.81	165	299	PK	PASS
207.02	67.9	37.90	-30.030	43.50	5.60	165	3	PK	PASS

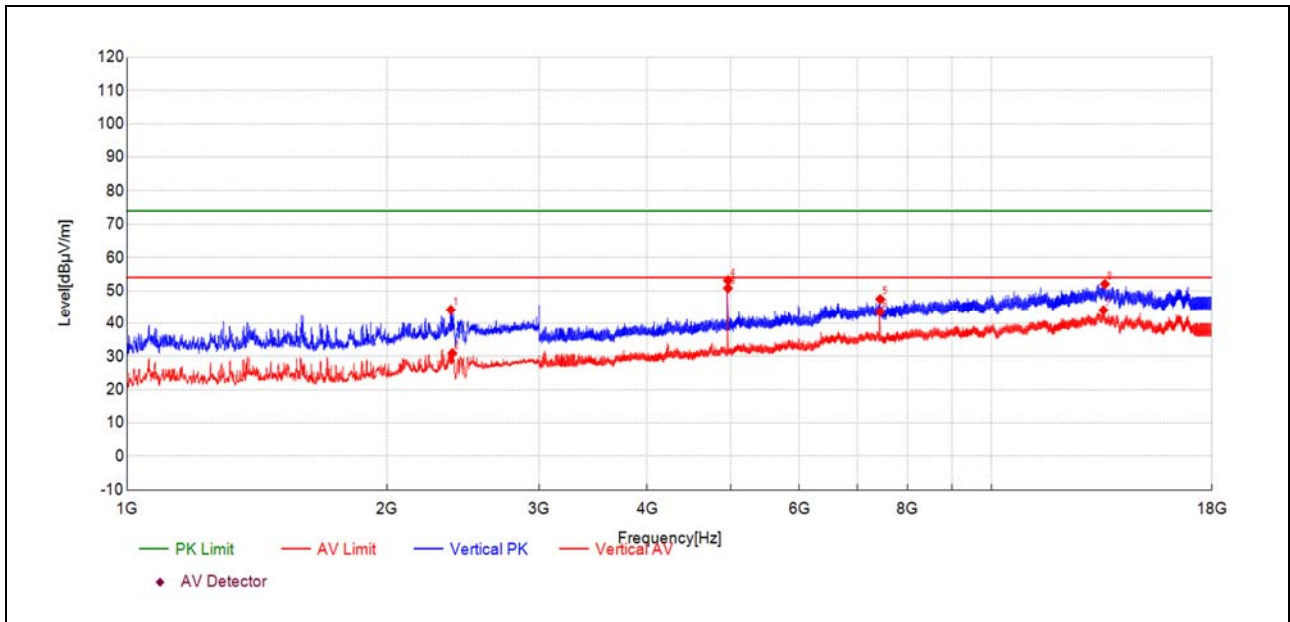

(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2369.96	43.7	44.11	0.450	74.00	29.89	165	110	PK	PASS
2379.73	30.3	30.90	0.600	54.00	23.10	165	110	AV	PASS
4960.34	60.9	50.76	-10.130	54.00	3.24	165	196	AV	PASS
4960.77	63.3	53.12	-10.130	74.00	20.88	165	196	PK	PASS
7440.98	51.9	47.44	-4.470	74.00	26.56	165	17	PK	PASS
7440.98	48.0	43.54	-4.470	54.00	10.46	165	17	AV	PASS
13490.44	39.3	44.01	4.710	54.00	9.99	165	196	AV	PASS
13543.59	47.2	52.00	4.760	74.00	22.00	165	168	PK	PASS



Notes

1. The report shall have report stamp or our company stamp.
2. The report shall be invalid without all the signatures of the editor and approver.
3. The report shall not be changed.
4. Any objections must be raised to Morlab within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.
5. Conformity declaration:
 - ☒ Morlab issues a statement of conformity based on the corresponding standards (default)
 - ☐ Morlab issues a statement of conformity based on the applicant requirement
6. Use of uncertainty of measurement for decisions on conformity (decision rule):

No decision rule is specified by the testing standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule).

————— END OF REPORT —————