



目录

1、 Test environment and equipment.....

2、 matching circuit.....

3、 Keep the original match unchanged

4、 GPS/WIFI/BT antenna test report.....

5、 Environmental treatment.....

1


2


2

6

6

1、 Test environment and equipment

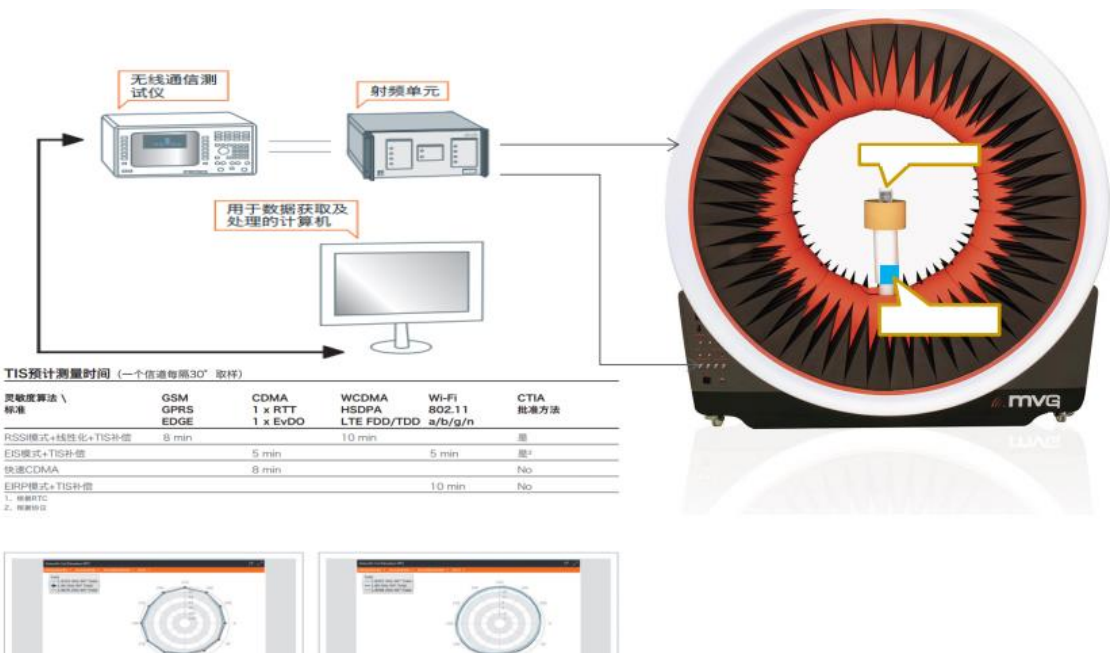

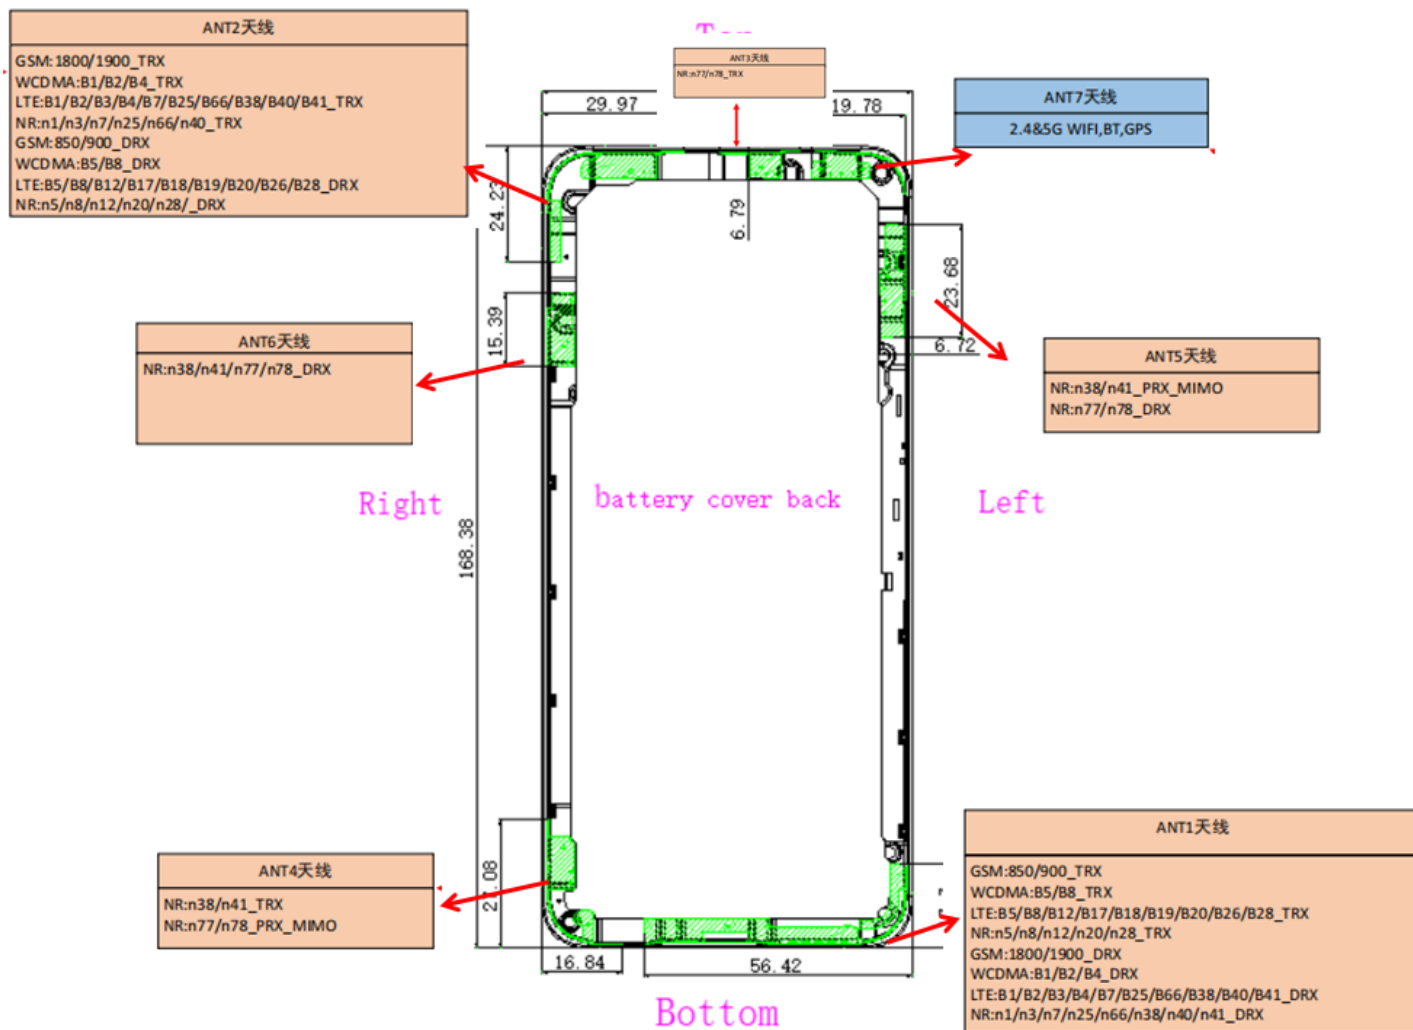

2. matching circuit

3、Keep the original match unchanged

Antenna test report

GSM850	128	25.25
	190	26.17
	251	25.73
	251	-102.47
GSM900	975	27.71
	38	26.85
	124	27.01
	124	-101.43
DCS1800	512	23.24
	699	25.06
	885	25.92
	885	-103.45
PCS1900	512	25.33



	661	24.52
	810	24.15
	810	-102.85

W1	10562	17.57
	10700	17.54
	10838	17.11
	10838	-103.49
W2	9662	17.56
	9800	17.45
	9938	17.57
	9938	-104.3
W4	1312	16.83
	1413	16.78
	1513	17.1
	1738	-103.64
W5	4357	15.76
	4408	15.67
	4458	15.56
	4458	-104.47
W8	2937	16.78
	3013	15.85
	3088	15.92
	3088	-102.23

FDD_B1(10MHz)	18050	17.83
	18300	17.69
	18550	17.96
	550	-90.86
FDD_B2(10MHz)	18650	18.22
	18900	17.68
	19150	17.43
	1150	-93.5
FDD_B4(10MHz)	20000	17.21
	20175	17.55
	20350	17.92
	2350	-94.31
FDD_B5(10MHz)	20450	15.86



	20525	15.88
	20600	15.78
	2600	-91.27
FDD_B7(10MHz)	20800	17.53
	21100	17.7
	21400	16.65
	3400	-92.47
FDD_B12(10MHz)	23060	15.41
	23095	16.07
	23130	15.96
	5130	-91.31
FDD_B13(5MHz)	23205	15.01
	23230	15.07
	23255	15.37
	5255	-93.06
FDD_B17(10MHz)	23780	15.83
	23790	16.04
	23800	15.97
	5800	-90.57
FDD_B25(10MHz)	26090	18.32
	26365	17.67
	26640	17.56
	8640	-92.4
FDD_B26(10MHz)		15.96
		15.82
		15.48
		-93.44
FDD_B28(10MHz)	27260	15.74
	27435	15.66
	27610	15.75
	9610	-90.84

FDD_B66 (10MHz)	132022	16.46
-----------------	--------	-------



	132322	17.96
	132622	18
	67036	-92.79
TDD_B38 (20MHz)	37850	16.67
	38000	17.11
	38150	16.84
	38150	-89.77
TDD_B41 (20MHz)	39750	19.37
	40620	20.42
	41490	19.25
	41490	-88.74
TDD_B48 (20MHz)	55340	21.26
	55990	21.62
	56640	21.64
	56640	-94.07

FR1_n2(10MHz)	372000	18.11
	376000	17.74
	380000	17.46
	396000	-93.58
FR1_n5(10MHz)	166800	15.5
	167300	15.79
	167800	15.99
	176800	-90.55
FR1_n25(10MHz)	372000	18.08
	376500	17.62
	381000	17.41
	397000	-92.78
FR1_n41(20MHz)	509202	19.56
	518598	19.93
	528000	20.46
	528000	-89.68
FR1_n48(20MHz)	638668	21.02
	641668	21.02
	644666	20.97
		-93.24
FR1_n66(10MHz)	344000	16.7



	351000	17.2
	354000	17.66
	434000	-92.57
FR1_n77(100MHz)	623334	21.37
	650000	25.56
	676666	25.97
		-88.42
FR1_n78(100MHz)	623334	21.83
	636666	24.31
	650000	25.6
		-87.55

4. GPS/WIFI/BT antenna test report


P6061 FS OTA			
model	channel	TRP	TIS
B 模 11M	1	10.85	-81.75
	6	10.68	-81.55
	13	10.67	-81.54
A 模 54M	36	9.5	-70.18
	48	9.46	-69.86
	165	9.54	-69.04
BT 1DH5	0	3.57	-88.99
	39	2.98	-89.88
	78	3.87	-88.65
GPS catch			
GPS	SPEC	OTA	
	-144	-144.35	


5. Environmental treatment

Keep the original environmental treatment unchanged




6. 3-D Patten Plots

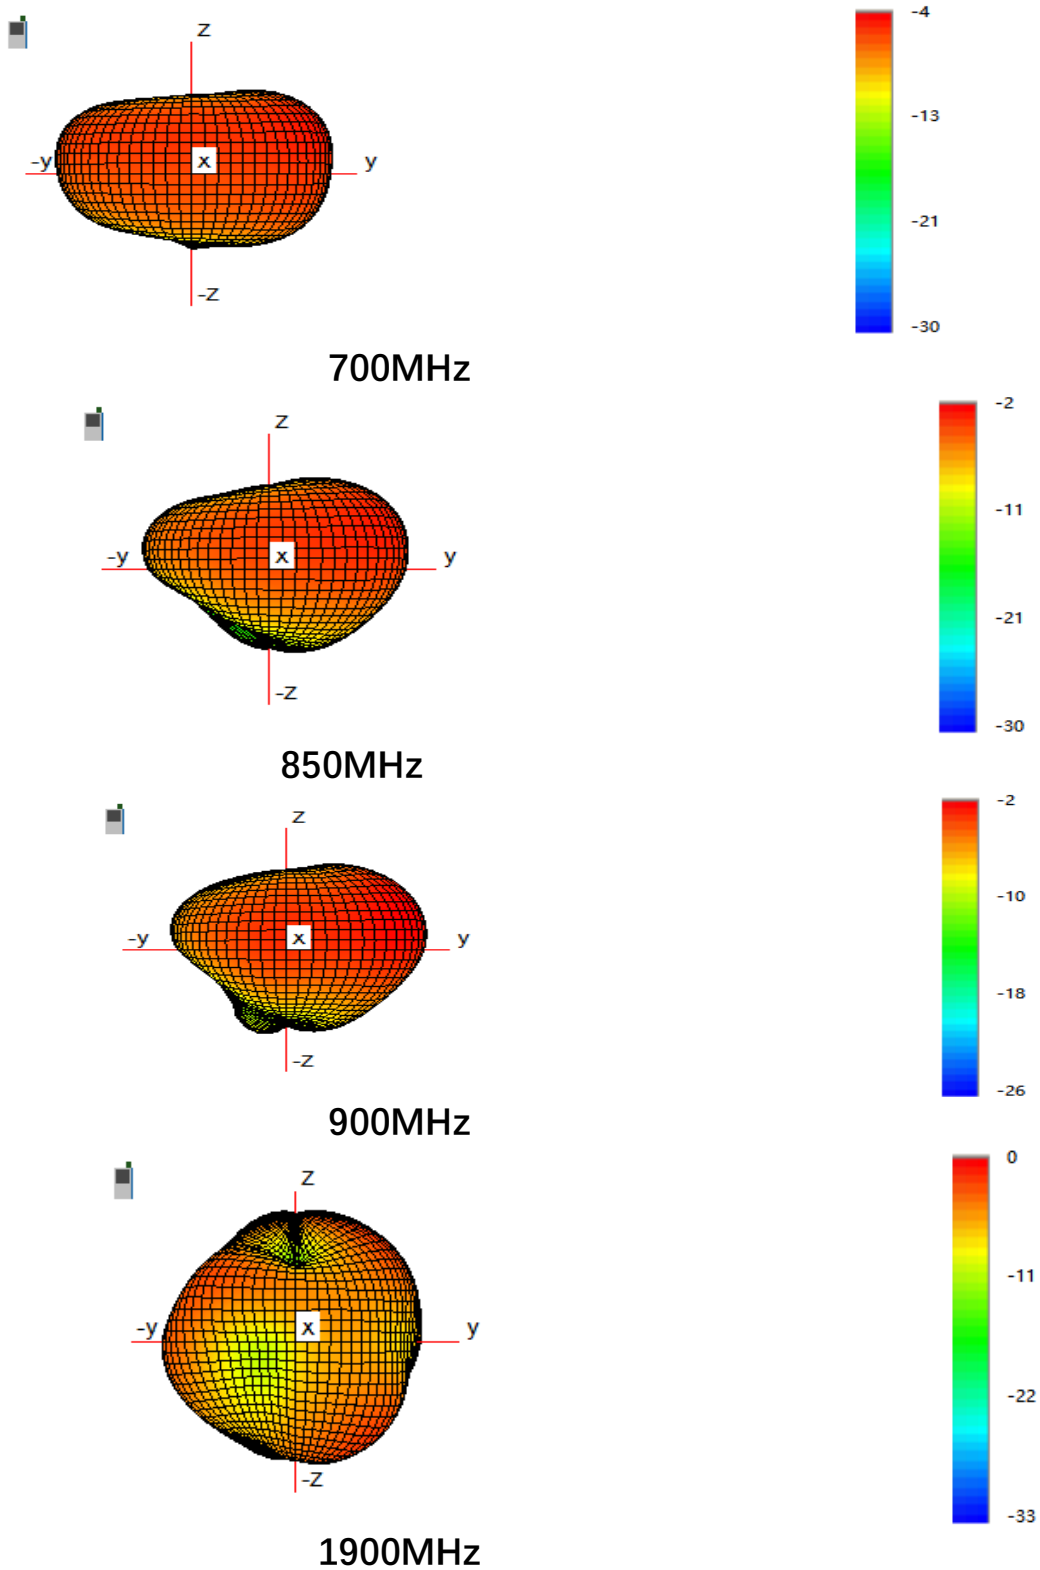


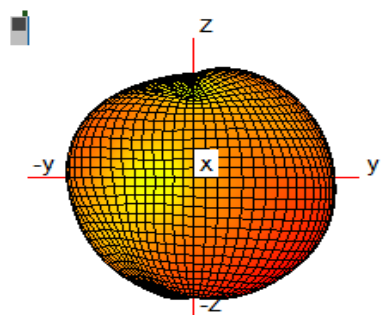


2100MHz

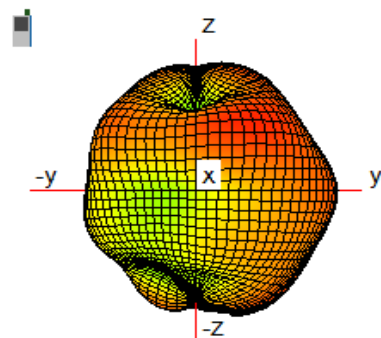





2700MHz

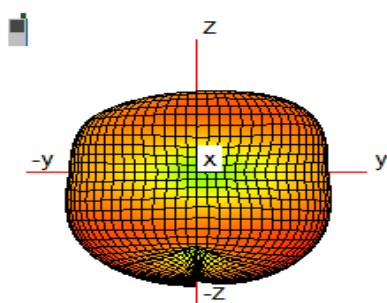


1575MHz

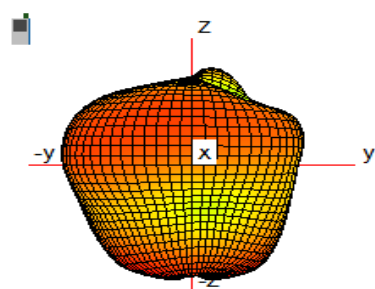

2400MHz




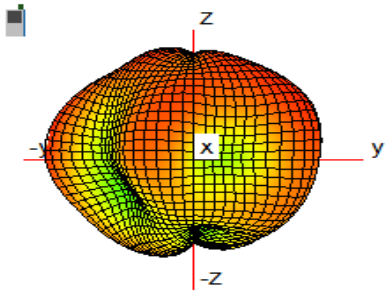

5100MHz


7. 2D drawings

ANT 1

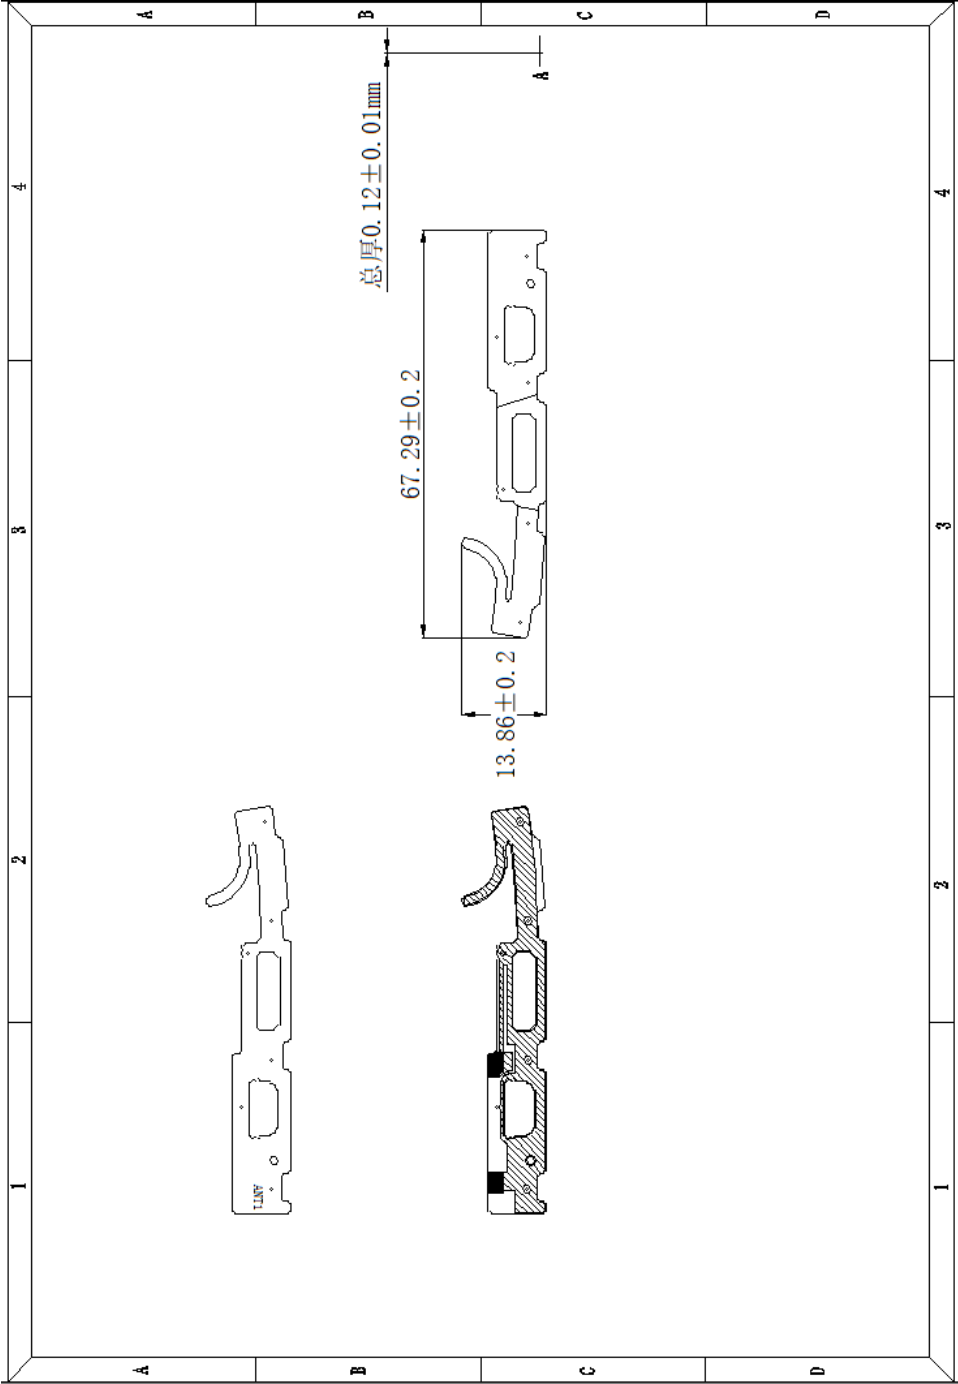




ANT 2

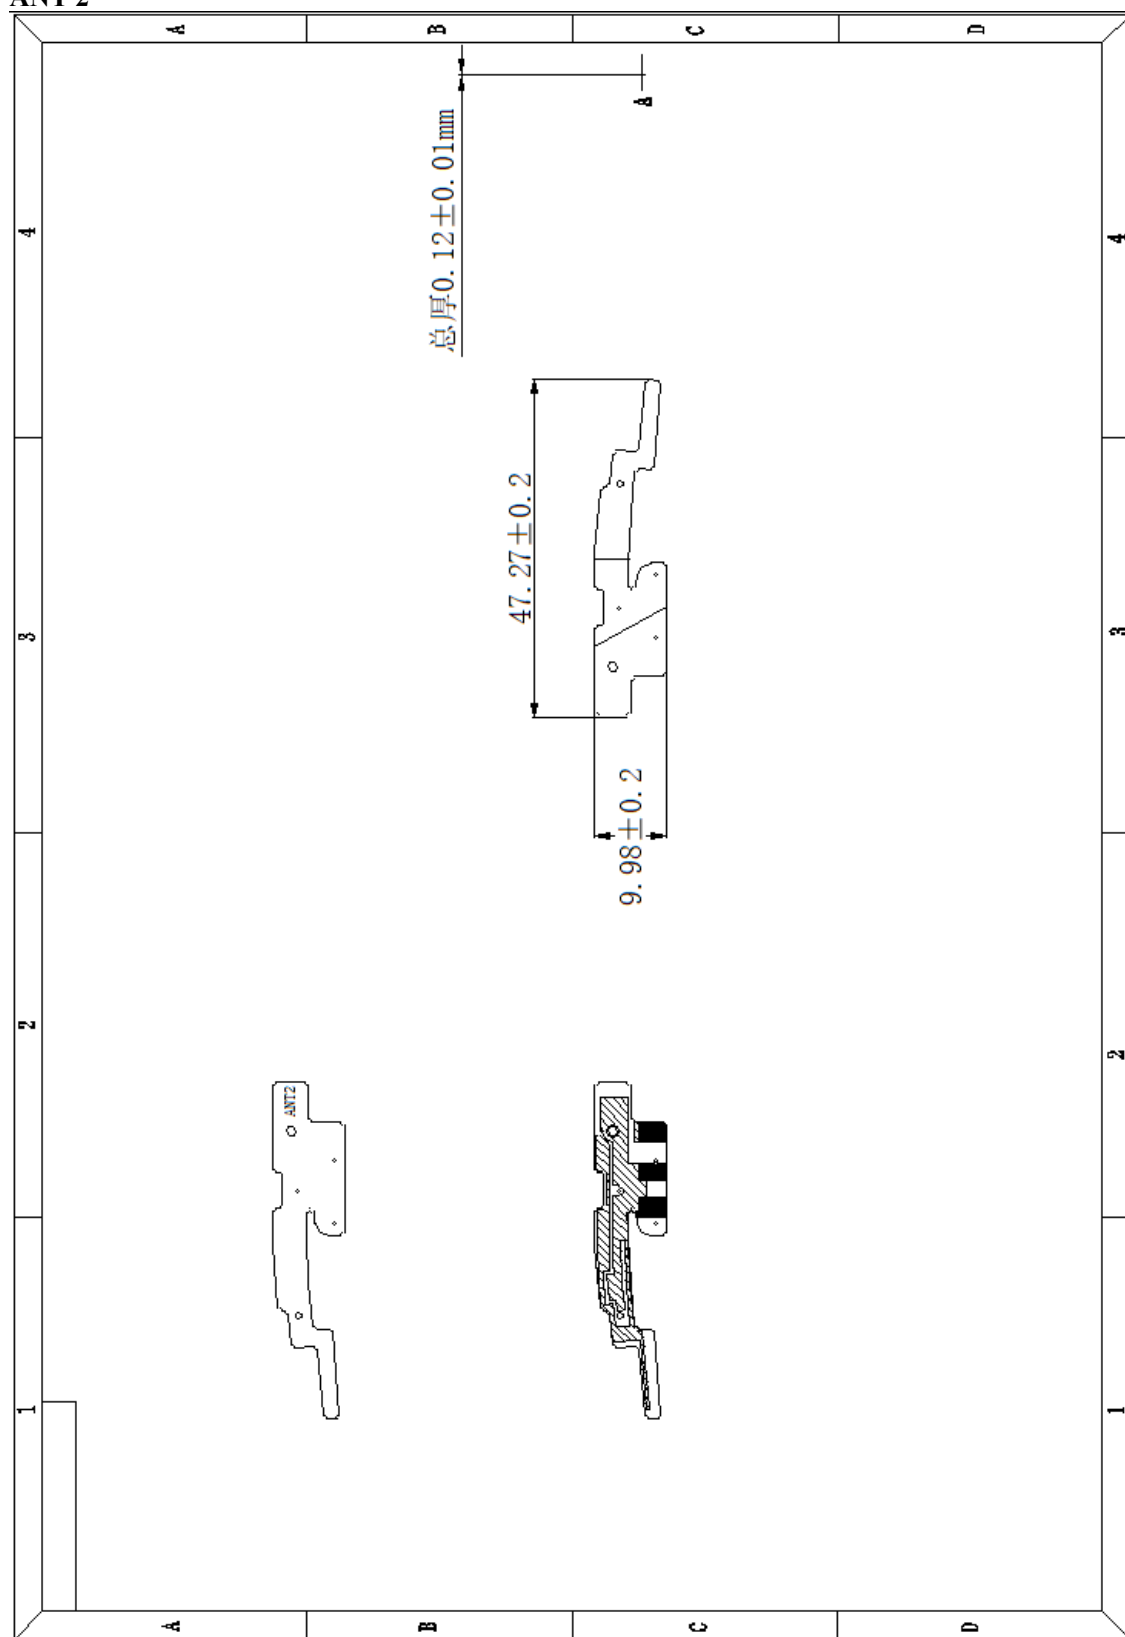




ANT 3

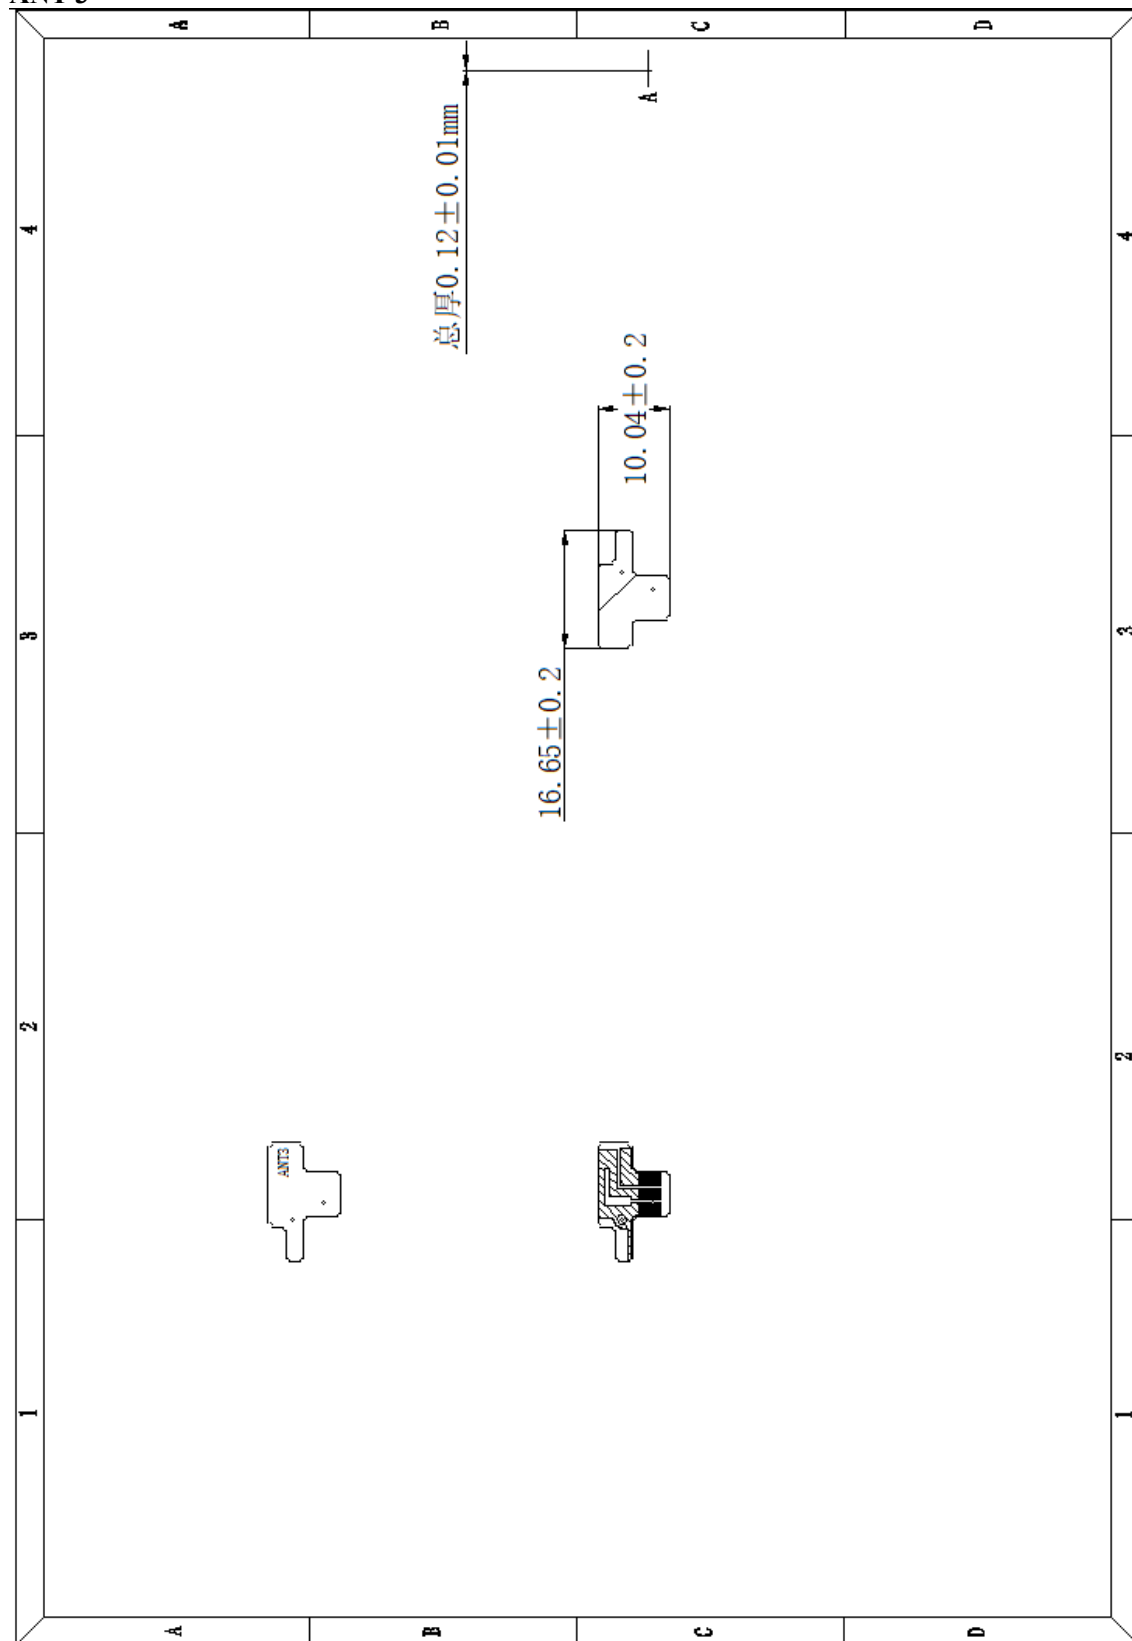




ANT 4

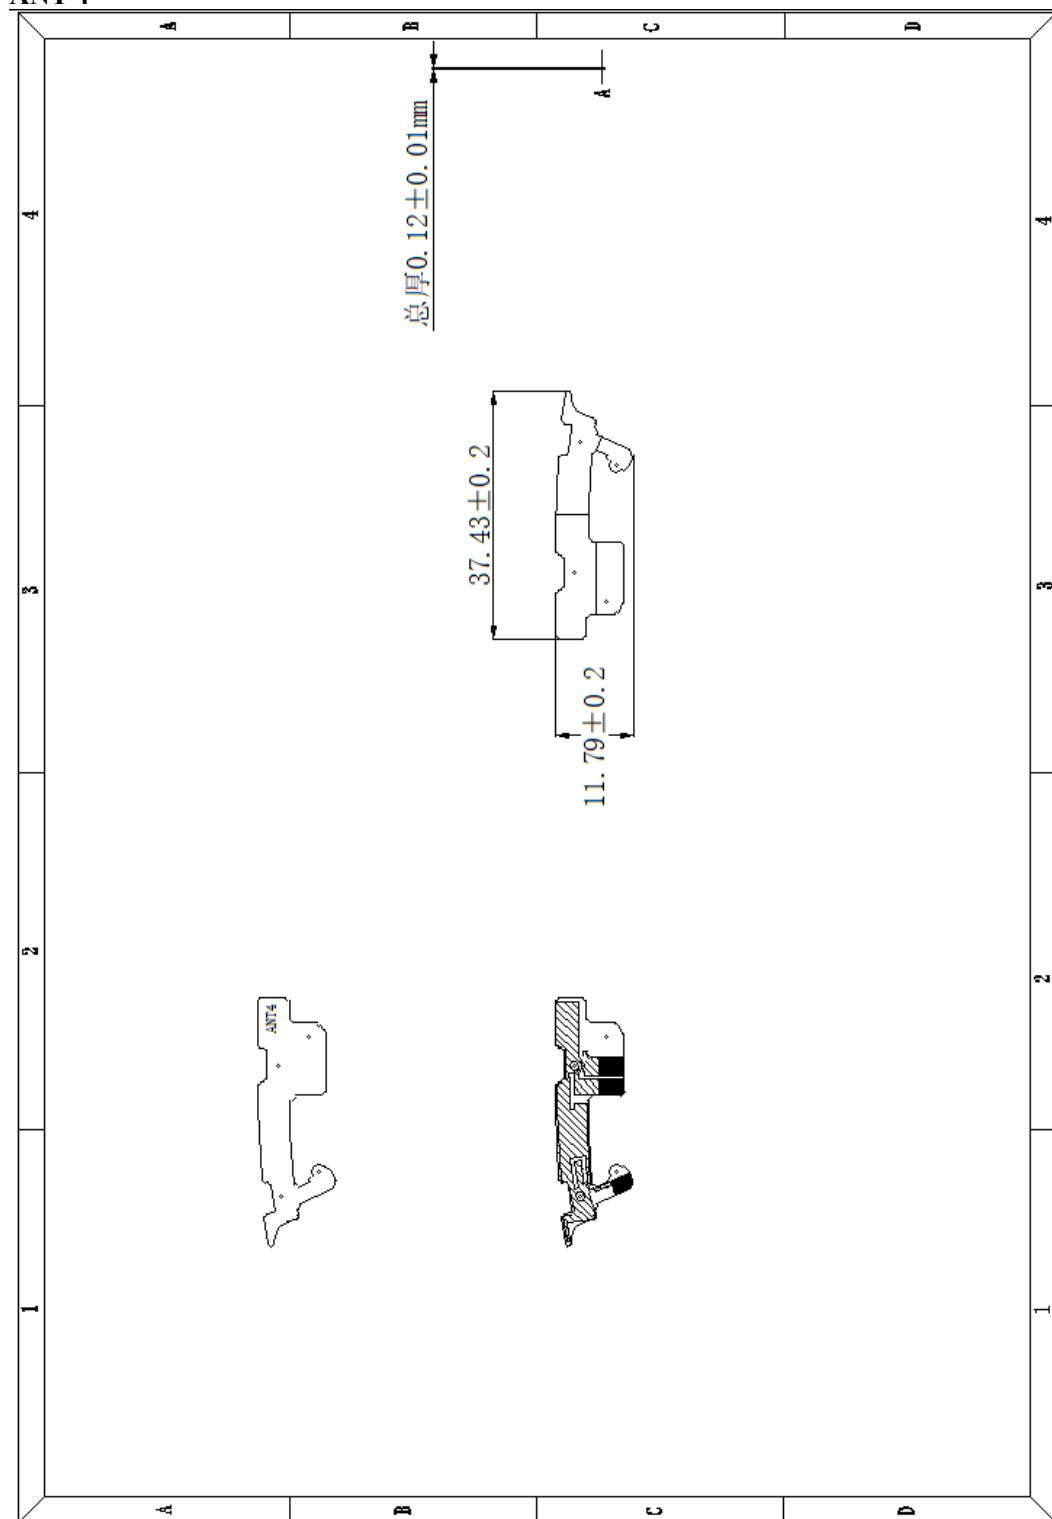




ANT 5

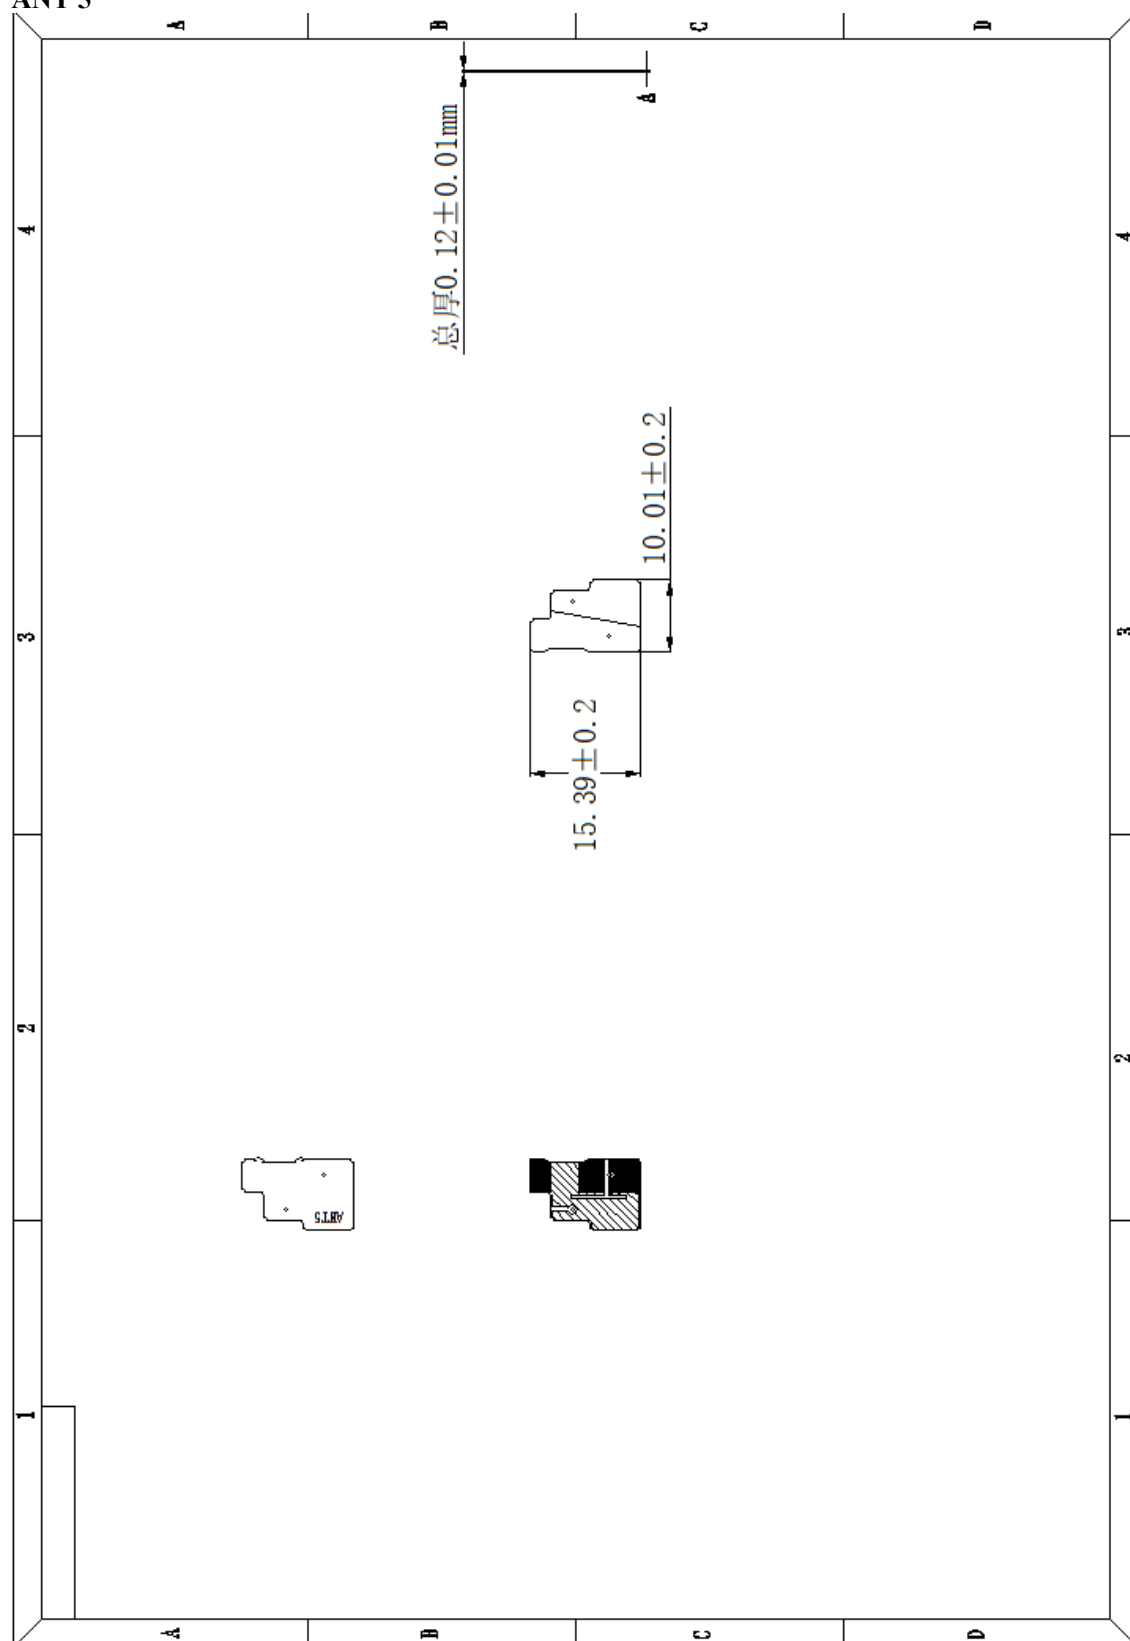



ANT 6

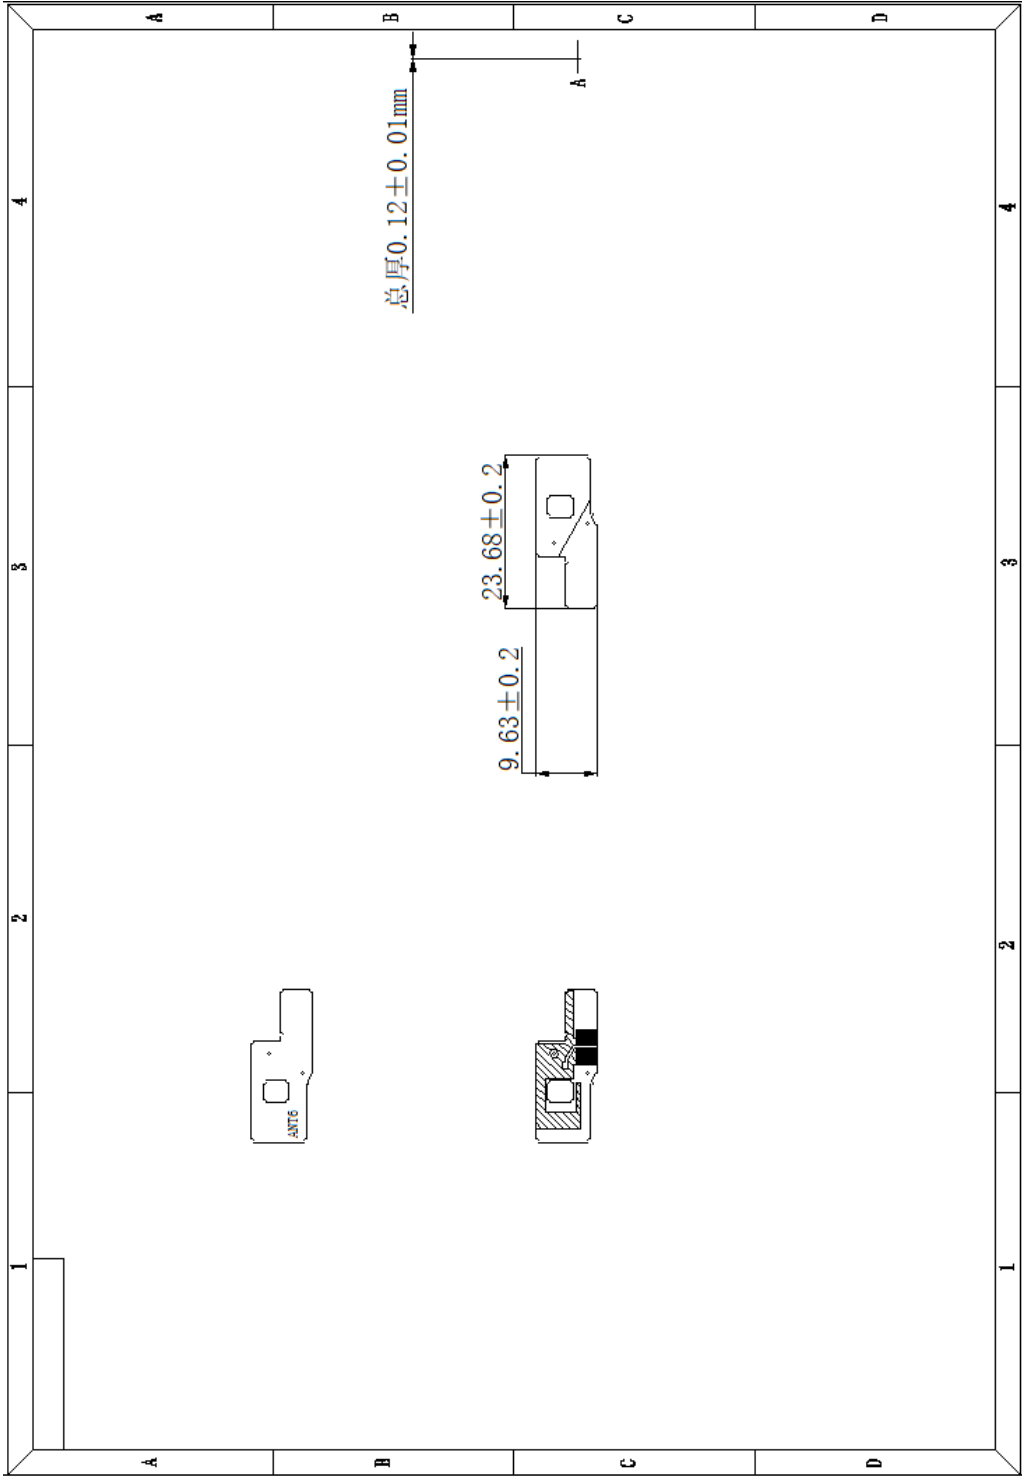



ANT 7

