

TEST REPORT

Application No.: SZCR2601000095AT
Applicant: Wyze Labs, Inc.
Address of Applicant: 8815 122nd Ave NE, Ste 201, Kirkland Washington 98033, United States
Manufacturer: Wyze Labs, Inc.
Address of Manufacturer: 8815 122nd Ave NE, Ste 201, Kirkland Washington 98033, United States
Equipment Under Test (EUT):
EUT Name: Wyze Indoor Cam Pan
Model No.: WYZECPANL
Trade Mark: WYZE
FCC ID: 2AUIUWYZECPANL
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2026-01-07
Date of Test: 2026-01-23 to 2026-03-25
Date of Issue: 2026-04-05

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Keny Xu

Keny Xu
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260100009502

Page: 2 of 84

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2026-04-05		Original

Authorized for issue by:				
		Tree Zhan		
		Tree Zhan/Project Engineer		
		Eric Fu		
		Eric Fu/Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2020) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2020) Section 6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Conducted Peak Output Power		ANSI C63.10 (2020) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth		ANSI C63.10 (2020) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectrum Density		ANSI C63.10 (2020) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2020) Section 6.10.4	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2020) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass

This product and adapter come in different color options.



3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty	6
4.4 Test Location	7
4.5 Test Facility	7
4.6 Deviation from Standards	7
4.7 Abnormalities from Standard Conditions	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement	10
6.1 Antenna Requirement	10
6.1.1 Test Requirement:	10
6.1.2 Conclusion	10
7 Radio Spectrum Matter Test Results	11
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	11
7.1.1 E.U.T. Operation	11
7.1.2 Test Mode Description	11
7.1.3 Test Setup Diagram	12
7.1.4 Measurement Procedure and Data	12
7.2 Radiated Emissions which fall in the restricted bands	15
7.2.1 E.U.T. Operation	15
7.2.2 Test Mode Description	15
7.2.3 Test Setup Diagram	16
7.2.4 Measurement Procedure and Data	17
7.3 Radiated Spurious Emissions Below 1GHz	26
7.3.1 E.U.T. Operation	26
7.3.2 Test Mode Description	26
7.3.3 Test Setup Diagram	27
7.3.4 Measurement Procedure and Data	27
7.4 Radiated Spurious Emissions Above 1GHz	34
7.4.1 E.U.T. Operation	34
7.4.2 Test Mode Description	34
7.4.3 Test Setup Diagram	35
7.4.4 Measurement Procedure and Data	36
7.5 Conducted Peak Output Power	51
7.5.1 E.U.T. Operation	51



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260100009502

Page: 5 of 84

7.5.2	Test Mode Description	51
7.5.3	Test Setup Diagram	52
7.5.4	Measurement Procedure and Data.....	52
7.6	Minimum 6dB Bandwidth	53
7.6.1	E.U.T. Operation	53
7.6.2	Test Mode Description	53
7.6.3	Test Setup Diagram	53
7.6.4	Measurement Procedure and Data.....	53
7.7	Power Spectrum Density	54
7.7.1	E.U.T. Operation	54
7.7.2	Test Mode Description	54
7.7.3	Test Setup Diagram	54
7.7.4	Measurement Procedure and Data.....	54
7.8	Conducted Band Edges Measurement	55
7.8.1	E.U.T. Operation	55
7.8.2	Test Mode Description	55
7.8.3	Test Setup Diagram	56
7.8.4	Measurement Procedure and Data.....	56
7.9	Conducted Spurious Emissions	57
7.9.1	E.U.T. Operation	57
7.9.2	Test Mode Description	57
7.9.3	Test Setup Diagram	58
7.9.4	Measurement Procedure and Data.....	58
8	Test Setup Photo	59
9	EUT Constructional Details (EUT Photos)	59
10	Appendix.....	60



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:	Powered by adapter. MODEL: GQ06A-050150-ZUU INPUT: 100-240V~50/60Hz 0.3A OUTPUT: 5V/1.5A
Cable(s):	USB-A to C 175cm unshielded
Cable Loss (for RF conducted test):	0.7dB
Operation Frequency:	2402MHz to 2480MHz
Modulation Type:	GFSK
Number of Channels:	40
Channel Spacing:	2MHz
Antenna Type:	FPC Antenna
Antenna Gain:	SY Antenna: 2.4 dBi YD Antenna: 2.48 dBi
	Remark: Both antennas were selected for radiated testing, and the worst-case gain was used in the conducted test.

Remark: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--

The EUT has been tested as an independent unit.

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	$\pm 3.2\text{dB}$
Radiated Emissions which fall in the restricted bands	$\pm 6.0\text{dB}$ (Below 1GHz); $\pm 4.6\text{dB}$ (Above 1GHz)
Radiated Spurious Emissions Below 1GHz	$\pm 6.0\text{dB}$ for 3m; $\pm 5.0\text{dB}$ for 10m
Radiated Spurious Emissions Above 1GHz	$\pm 4.6\text{dB}$ (1-18GHz); $\pm 4.8\text{dB}$ (18-40GHz)
Conducted Peak Output Power	$\pm 0.4\text{dB}$
Minimum 6dB Bandwidth	$\pm 0.3\%$
Power Spectrum Density	$\pm 0.4\text{dB}$
Conducted Band Edges Measurement	$\pm 2.7\text{dB}$
Conducted Spurious Emissions	$\pm 2.7\text{dB}$



Remark:

The U_{lab} (lab Uncertainty) is less than $U_{CISPR/ETSI}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2025-05-07	2028-05-06
EMI Test Receiver	Rohde&Schwarz	ESR	SZ-WRG-M-047	2025-12-15	2026-12-14
Measurement Software	AUDIX	e3 V8.2014-6-27a	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2025-07-05	2026-07-04
LISN	Rohde&Schwarz	ENV216	SEM007-01	2025-07-25	2026-07-24
LISN	ETS-LINDGREN	3816/2	SEM007-02	2025-02-25 2026-02-24	2026-02-24 2027-02-23

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Fully-Anechoic Chamber	AUDIX	N/A	SEM001-02	2025-05-07	2028-05-06
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2025-02-03 2026-02-02	2026-02-02 2027-02-01
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2025-07-22	2026-07-21
Microwave system amplifier	Agilent	83017A	SEM005-25	2025-09-10	2026-09-09
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2025-07-05	2026-07-04
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2025-07-22	2027-07-21

Radiated Spurious Emissions Below 1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2025-11-17	2027-11-16
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2023-06-19	2026-06-18
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2025-07-25	2026-07-24
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-01	2025-08-29	2027-08-28
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2025-02-03 2026-02-02	2026-02-02 2027-02-01
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2025-07-05	2026-07-04



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Shenzhen EMC Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260100009502

Page: 9 of 84

Radiated Spurious Emissions Above 1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Fully-Anechoic Chamber	AUDIX	N/A	SEM001-02	2025-05-07	2028-05-06
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2025-02-03 2026-02-02	2026-02-02 2027-02-01
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2025-07-22	2026-07-21
Microwave system amplifier	Agilent	83017A	SEM005-25	2025-09-10	2026-09-09
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2025-07-05	2026-07-04
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2025-07-22	2027-07-21
Low Noise Amplifier 18G-40GHz	Tonscend	TAP18040048	SZ-WRG-M-052	2025-12-16	2026-12-15

RF Conducted Test					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Power Sensor	TST PASS	TSPS2023R	SEM009-26	2025-02-05 2026-02-04	2026-02-04 2027-02-03
Power Sensor	KEYSIGHT	U2021XA	SEM009-16	2025-02-05 2026-02-04	2026-02-04 2027-02-03
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2025-07-24	2026-07-23
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2025-02-04 2026-02-03	2026-02-03 2027-02-02
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2025-07-05	2026-07-04
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2025-02-03 2026-02-02	2026-02-02 2027-02-01

General used equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2025-07-23	2026-07-22
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2025-07-23	2026-07-22
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2025-02-15 2026-02-14	2026-02-14 2027-02-13



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

Measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. There are two antenna suppliers with respective gains: SY Antenna 2.4 dBi, YD Antenna 2.48 dBi.

The best case gain of the antenna is 2.48dBi.

Antenna location: Refer to internal photos.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207
 Test Method: ANSI C63.10 (2020) Section 6.2
 Test Engineer: Mason Wu

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:


Temperature: 23.4 °C Humidity: 42.5 % RH Atmospheric Pressure: 1020 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Pre-scan	02	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.



7.1.3 Test Setup Diagram

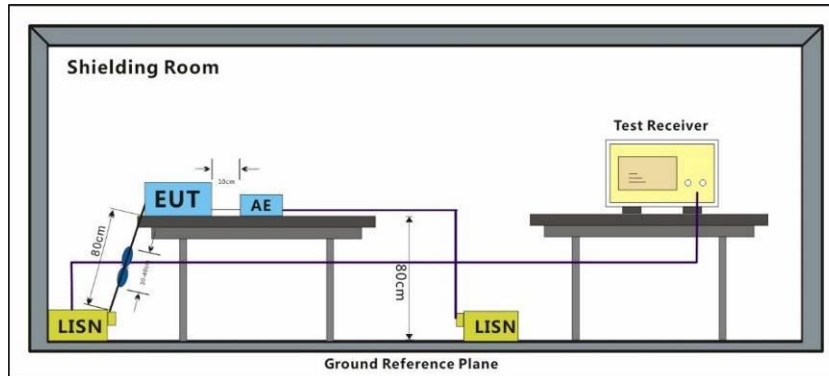

7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260100009502

Page: 13 of 84

Test Mode: 01; Line: Live line

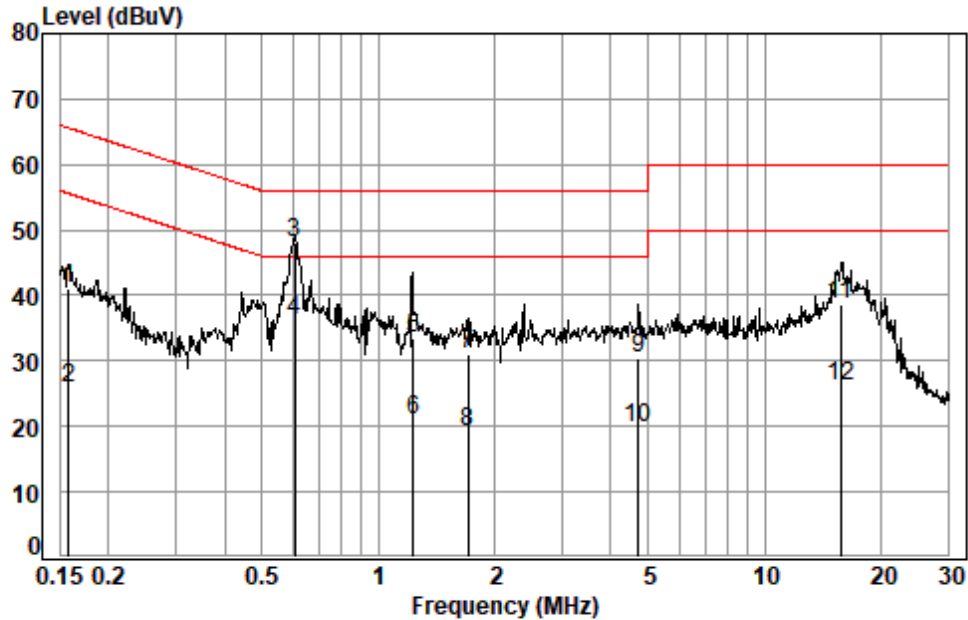

Site : Shielding Room
Condition: Line
Job No. : 00095AT/00096AT
Test mode: 01

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1582	0.06	9.63	31.39	41.08	65.56	-24.48	QP
2	0.1582	0.06	9.63	16.10	25.79	55.56	-29.77	Average
3 *	0.6075	0.10	9.64	38.44	48.18	56.00	-7.82	QP
4 *	0.6075	0.10	9.64	26.32	36.06	46.00	-9.94	Average
5	1.2291	0.11	9.68	23.80	33.59	56.00	-22.41	QP
6	1.2291	0.11	9.68	11.34	21.13	46.00	-24.87	Average
7	1.7071	0.12	9.71	21.28	31.11	56.00	-24.89	QP
8	1.7071	0.12	9.71	9.41	19.24	46.00	-26.76	Average
9	4.7213	0.14	9.97	20.46	30.57	56.00	-25.43	QP
10	4.7213	0.14	9.97	9.53	19.64	46.00	-26.36	Average
11	15.7179	0.17	11.65	26.86	38.68	60.00	-21.32	QP
12	15.7179	0.17	11.65	14.23	26.05	50.00	-23.95	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Shenzhen) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260100009502

Page: 14 of 84

Test Mode: 01; Line: Neutral Line

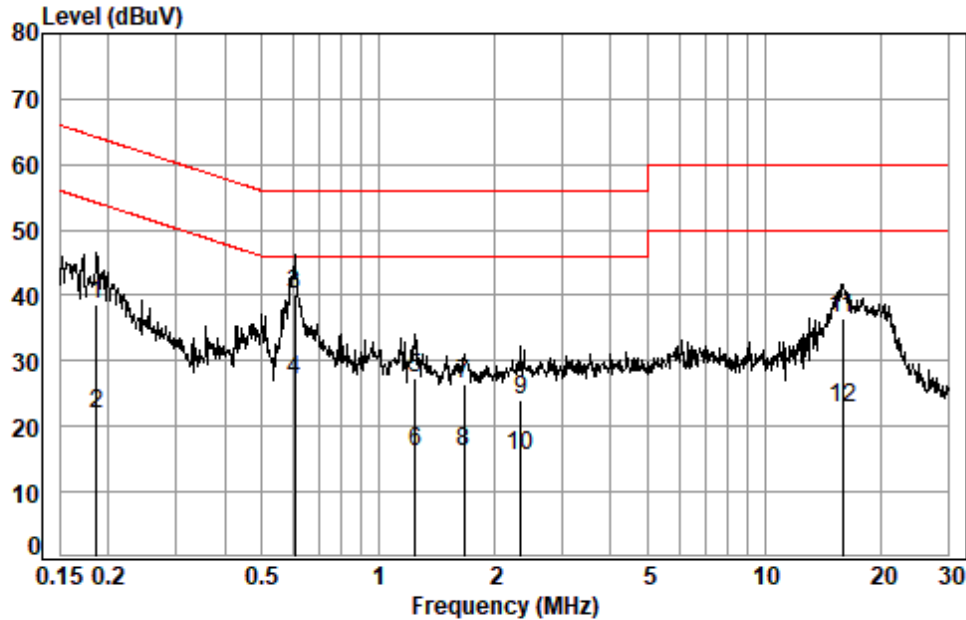

Site : Shielding Room
Condition: Neutral
Job No. : 00095AT/00096AT
Test mode: 01

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1864	0.07	9.67	28.82	38.56	64.20	-25.64	QP
2	0.1864	0.07	9.67	12.30	22.04	54.20	-32.16	Average
3 *	0.6075	0.10	9.63	30.29	40.02	56.00	-15.98	QP
4 *	0.6075	0.10	9.63	17.37	27.10	46.00	-18.90	Average
5	1.2488	0.11	9.68	17.48	27.27	56.00	-28.73	QP
6	1.2488	0.11	9.68	6.20	15.99	46.00	-30.01	Average
7	1.6713	0.12	9.70	16.55	26.37	56.00	-29.63	QP
8	1.6713	0.12	9.70	6.30	16.12	46.00	-29.88	Average
9	2.3336	0.13	9.75	14.24	24.12	56.00	-31.88	QP
10	2.3336	0.13	9.75	5.68	15.56	46.00	-30.44	Average
11	15.9698	0.17	11.69	24.75	36.61	60.00	-23.39	QP
12	15.9698	0.17	11.69	10.81	22.67	50.00	-27.33	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Shenzhen EMC Laboratory)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2020) Section 6.10.5
 Measurement Distance: 3m
 Test Engineer: Logic Wang

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2.1 E.U.T. Operation

Operating Environment:


Temperature: 23.5 °C Humidity: 56.3 % RH Atmospheric Pressure: 1020 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	02	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.



7.2.3 Test Setup Diagram

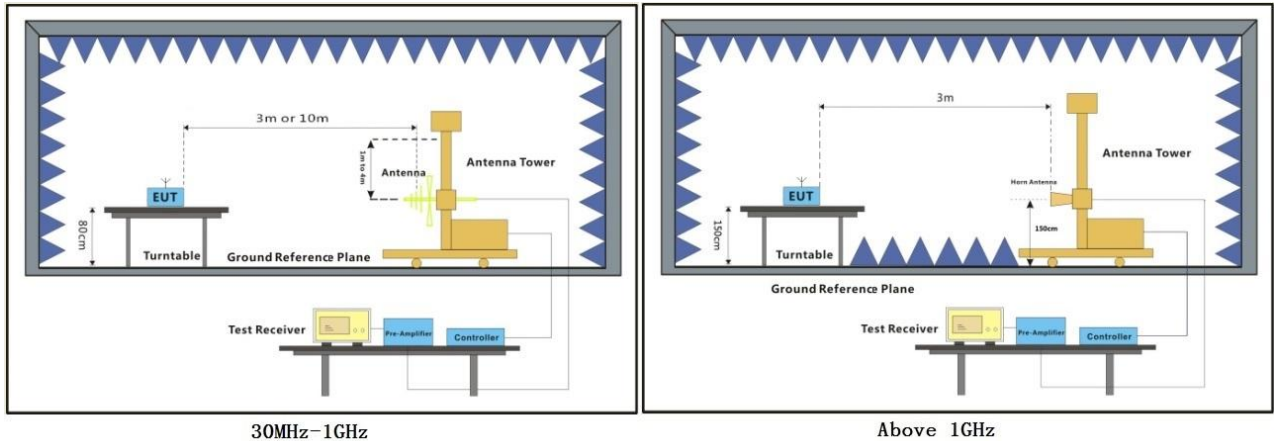

30MHz-1GHz

Above 1GHz



7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



SY Antenna:


BLE_1M_TX_CH_00_Horizontal-Peak

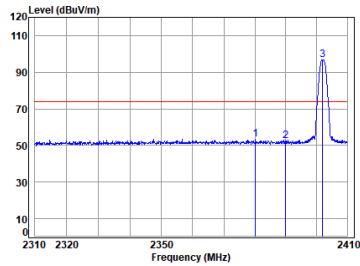

Site : chamber
Condition: 3m HORIZONTAL
Job No : 0009SAT00096AT
Mode : 2402 Band edge
BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2380.159	16.12	29.10	32.79	40.91	53.34	74.00	-20.66	Peak	0.00
2	2390.000	16.13	29.10	32.78	39.88	52.33	74.00	-21.67	Peak	0.00
3 p	2402.000	16.15	29.09	32.77	84.27	96.74	74.00	22.74	Peak	0.00


BLE_1M_TX_CH_00_Horizontal-Avg

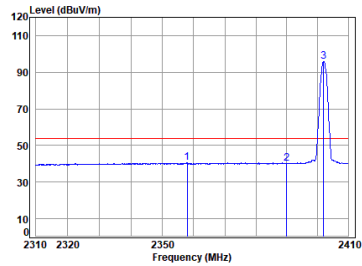

Site : chamber
Condition: 3m HORIZONTAL
Job No : 0009SAT00096AT
Mode : 2402 Band edge
BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2380.159	16.08	29.10	32.80	28.13	40.51	54.00	-13.49	Average	0.00
2	2390.000	16.13	29.10	32.78	27.84	40.29	54.00	-13.71	Average	0.00
3 q	2402.000	16.15	29.09	32.77	83.47	95.94	54.00	41.94	Average	0.00


BLE_1M_TX_CH_00_Vertical-Peak

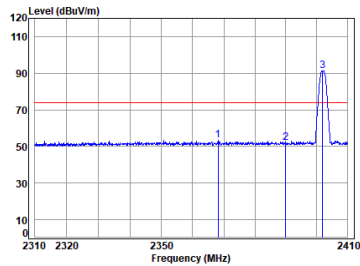

Site : chamber
Condition: 3m VERTICAL
Job No : 0009SAT00096AT
Mode : 2402 Band edge
BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2380.159	16.10	29.10	32.79	41.13	53.54	74.00	-20.46	Peak	0.00
2	2390.000	16.13	29.10	32.78	39.34	51.79	74.00	-22.21	Peak	0.00
3 p	2402.000	16.15	29.09	32.77	78.90	91.37	74.00	17.37	Peak	0.00

BLE_1M_TX_CH_00_Vertical-Avg

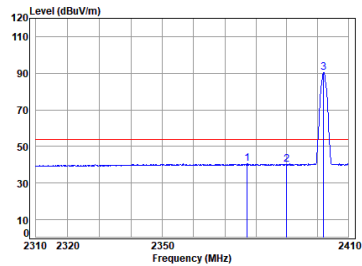


Site : chamber
Condition: 3m VERTICAL
Job No : 0009SAT00096AT
Mode : 2402 Band edge
BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2380.159	16.11	29.10	32.79	27.97	40.39	54.00	-13.61	Average	0.00
2	2390.000	16.13	29.10	32.78	27.84	40.29	54.00	-13.71	Average	0.00
3 q	2402.000	16.15	29.09	32.77	77.84	90.31	54.00	36.31	Average	0.00




BLE_1M_TX_CH_39_Horizontal-Peak

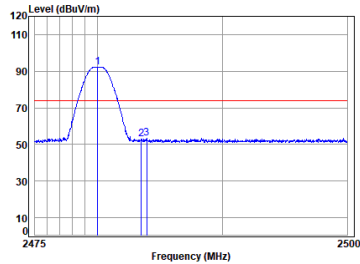

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2480 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 p 2480.000	16.27	28.90	32.73	79.94	92.38	74.00	18.38	Peak	0.00
2 2483.500	16.28	28.90	32.73	40.61	53.06	74.00	-20.94	Peak	0.00
3 2483.921	16.28	28.90	32.73	41.14	53.59	74.00	-20.41	Peak	0.00


BLE_1M_TX_CH_39_Horizontal-Avg

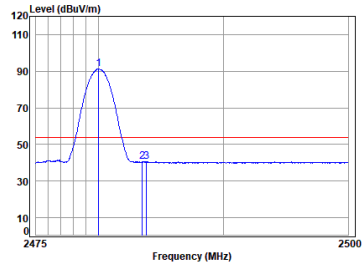

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2480 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q 2480.000	16.27	28.90	32.73	78.72	91.16	74.00	17.16	Average	0.00
2 2483.500	16.28	28.90	32.73	28.06	40.51	74.00	-33.49	Average	0.00
3 2483.821	16.28	28.90	32.73	28.28	40.73	74.00	-33.27	Average	0.00


BLE_1M_TX_CH_39_Vertical-Peak

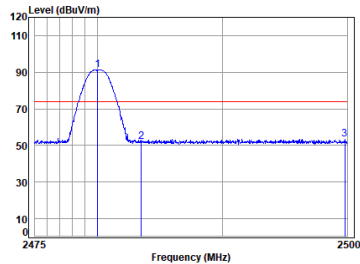

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2480 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 p 2480.000	16.27	28.90	32.73	78.74	91.18	74.00	17.18	Peak	0.00
2 2483.500	16.28	28.90	32.73	39.57	52.02	74.00	-21.98	Peak	0.00
3 2489.824	16.30	28.90	32.72	41.12	53.60	74.00	-20.40	Peak	0.00

BLE_1M_TX_CH_39_Vertical-Avg

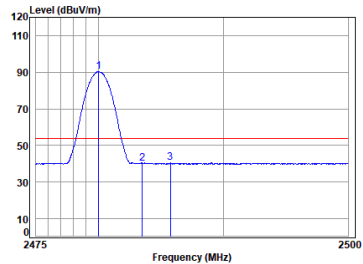


Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2480 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q 2480.000	16.27	28.90	32.73	77.90	90.34	74.00	16.34	Average	0.00
2 2483.500	16.28	28.90	32.73	27.88	40.33	74.00	-33.67	Average	0.00
3 2485.744	16.28	28.90	32.73	28.01	40.46	74.00	-33.54	Average	0.00




BLE_2M_TX_CH_00_Horizontal-Peak

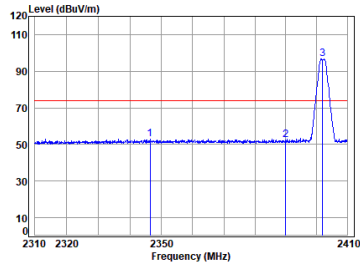

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2402 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 2346.407	16.07	29.05	32.80	40.82	53.14	74.00	-20.86	Peak	0.00
2 2390.000	16.13	29.10	32.78	40.12	52.57	74.00	-21.43	Peak	0.00
3 p 2402.000	16.15	29.09	32.77	84.17	96.64	74.00	22.64	Peak	0.00


BLE_2M_TX_CH_00_Horizontal-Avg

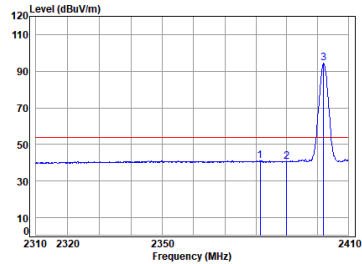

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2402 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 2381.370	16.12	29.10	32.78	28.76	41.20	54.00	-12.80	Average	0.00
2 2390.000	16.13	29.10	32.78	27.99	40.44	54.00	-13.56	Average	0.00
3 q 2402.000	16.15	29.09	32.77	81.82	94.29	54.00	40.29	Average	0.00


BLE_2M_TX_CH_00_Vertical-Peak

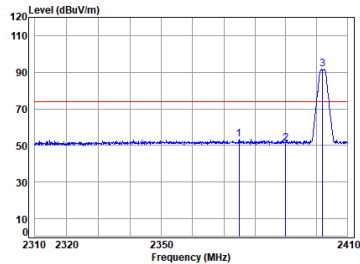

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2402 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 2374.919	16.11	29.10	32.79	41.15	53.57	74.00	-20.43	Peak	0.00
2 2390.000	16.13	29.10	32.78	38.59	51.04	74.00	-22.96	Peak	0.00
3 p 2402.000	16.15	29.09	32.77	79.10	91.57	74.00	17.57	Peak	0.00

BLE_2M_TX_CH_00_Vertical-Avg

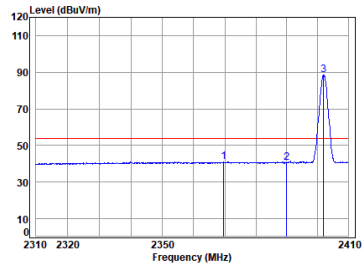


Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2402 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 2369.591	16.10	29.10	32.79	28.66	41.07	54.00	-12.93	Average	0.00
2 2390.000	16.13	29.10	32.78	28.00	40.45	54.00	-13.55	Average	0.00
3 q 2402.000	16.15	29.09	32.77	76.19	88.66	54.00	34.66	Average	0.00




BLE_2M_TX_CH_39_Horizontal-Peak

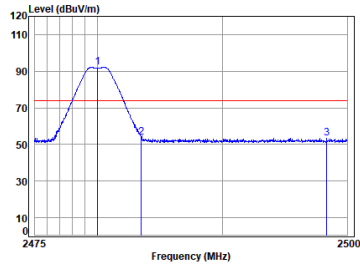

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2480 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 p 2480.000	16.27	28.90	32.73	79.75	92.19	74.00	18.19	Peak	0.00
2 2483.500	16.28	28.90	32.73	41.25	53.70	74.00	-20.30	Peak	0.00
3 2498.367	16.30	28.90	32.73	40.99	53.46	74.00	-20.54	Peak	0.00


BLE_2M_TX_CH_39_Horizontal-Avg

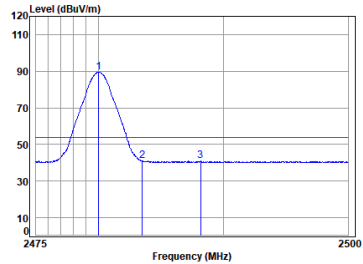

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2480 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q 2480.000	16.27	28.90	32.73	77.01	89.45	74.00	15.45	Average	0.00
2 2483.500	16.28	28.90	32.73	28.51	40.96	74.00	-33.04	Average	0.00
3 2488.144	16.28	28.90	32.73	28.48	40.93	74.00	-33.07	Average	0.00


BLE_2M_TX_CH_39_Vertical-Peak

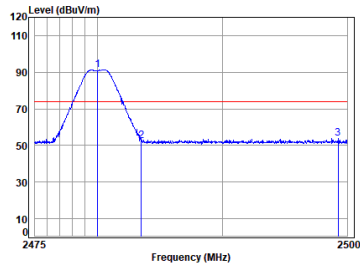

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2480 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 p 2480.000	16.27	28.90	32.73	78.92	91.36	74.00	17.36	Peak	0.00
2 2483.500	16.28	28.90	32.73	40.22	52.67	74.00	-21.33	Peak	0.00
3 2499.271	16.30	28.90	32.73	41.59	54.06	74.00	-19.94	Peak	0.00

BLE_2M_TX_CH_39_Vertical-Avg

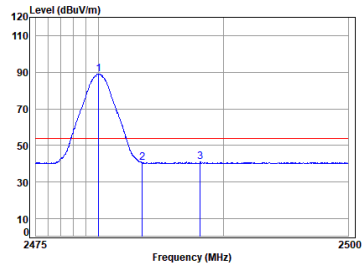


Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2480 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q 2480.000	16.27	28.90	32.73	76.55	88.99	74.00	14.99	Average	0.00
2 2483.500	16.28	28.90	32.73	28.07	40.52	74.00	-33.48	Average	0.00
3 2488.119	16.28	28.90	32.73	28.50	40.95	74.00	-33.05	Average	0.00



YD Antenna:


BLE_1M_TX_CH_00_Horizontal-Peak

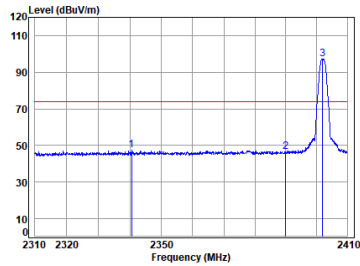

Site : chamber
Condition: 3m HORIZONTAL
Job No : 0009SAT00096AT
Mode : 2402 Band edge
: BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2348.548	16.06	28.97	32.81	35.07	47.29	74.00	-26.71	Peak	0.00
2	2390.000	16.13	29.10	32.78	34.14	46.59	74.00	-27.41	Peak	0.00
3 p	2402.000	16.15	29.09	32.77	84.55	97.02	74.00	23.02	Peak	0.00


BLE_1M_TX_CH_00_Horizontal-Avg

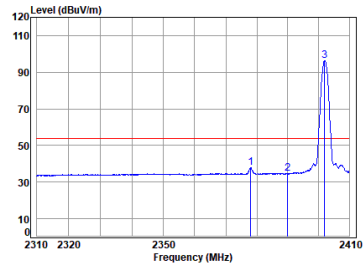

Site : chamber
Condition: 3m HORIZONTAL
Job No : 0009SAT00096AT
Mode : 2402 Band edge
: BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2378.042	16.12	29.10	32.79	25.53	37.96	54.00	-16.04	Average	0.00
2	2390.000	16.13	29.10	32.78	22.89	34.54	54.00	-19.46	Average	0.00
3 q	2402.000	16.15	29.09	32.77	83.80	96.27	54.00	42.27	Average	0.00


BLE_1M_TX_CH_00_Vertical-Peak

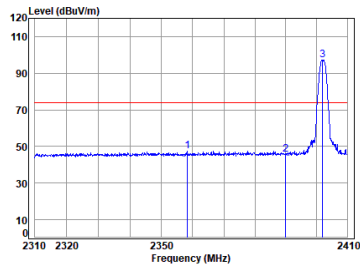

Site : chamber
Condition: 3m VERTICAL
Job No : 0009SAT00096AT
Mode : 2402 Band edge
: BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2358.271	16.09	29.10	32.80	35.11	47.50	74.00	-26.50	Peak	0.00
2	2390.000	16.13	29.10	32.78	33.22	45.67	74.00	-28.33	Peak	0.00
3 p	2402.000	16.15	29.09	32.77	84.55	97.02	74.00	23.02	Peak	0.00

BLE_1M_TX_CH_00_Vertical-Avg

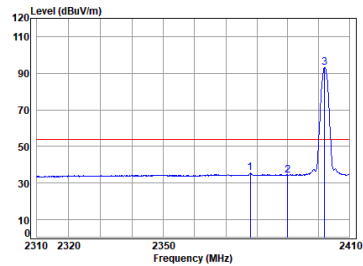


Site : chamber
Condition: 3m VERTICAL
Job No : 0009SAT00096AT
Mode : 2402 Band edge
: BLE

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2377.840	16.12	29.10	32.79	23.09	35.52	54.00	-18.48	Average	0.00
2	2390.000	16.13	29.10	32.78	21.93	34.38	54.00	-19.62	Average	0.00
3 q	2402.000	16.15	29.09	32.77	80.79	93.26	54.00	39.26	Average	0.00




BLE_1M_TX_CH_39_Horizontal-Peak

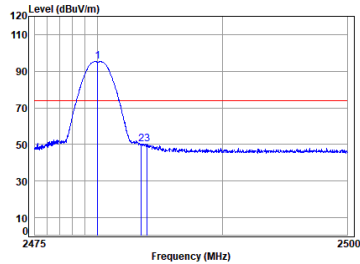

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2480 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 p 2480.000	16.27	28.90	32.73	82.76	95.20	74.00	21.20	Peak	0.00
2 2483.500	16.28	28.90	32.73	37.90	50.35	74.00	-23.65	Peak	0.00
3 2483.946	16.28	28.90	32.73	37.95	50.40	74.00	-23.60	Peak	0.00


BLE_1M_TX_CH_39_Horizontal-Avg

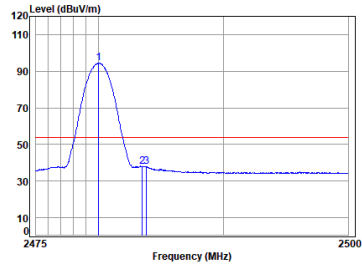

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2480 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q 2480.000	16.27	28.90	32.73	81.96	94.40	74.00	20.40	Average	0.00
2 2483.500	16.28	28.90	32.73	25.53	37.98	74.00	-36.02	Average	0.00
3 2483.821	16.28	28.90	32.73	25.30	37.75	74.00	-36.25	Average	0.00


BLE_1M_TX_CH_39_Vertical-Peak

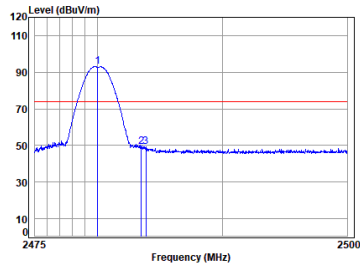

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2480 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 p 2480.000	16.27	28.90	32.73	80.54	92.98	74.00	18.98	Peak	0.00
2 2483.500	16.28	28.90	32.73	36.83	49.28	74.00	-24.72	Peak	0.00
3 2483.871	16.28	28.90	32.73	36.99	49.44	74.00	-24.56	Peak	0.00

BLE_1M_TX_CH_39_Vertical-Avg

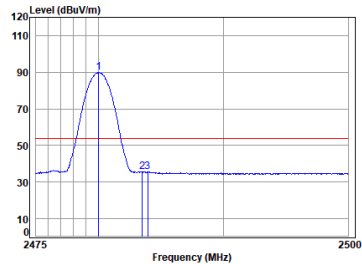


Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2480 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q 2480.000	16.27	28.90	32.73	77.46	89.90	74.00	15.90	Average	0.00
2 2483.500	16.28	28.90	32.73	23.06	35.51	74.00	-38.49	Average	0.00
3 2483.921	16.28	28.90	32.73	23.26	35.71	74.00	-38.29	Average	0.00




BLE_2M_TX_CH_00_Horizontal-Peak

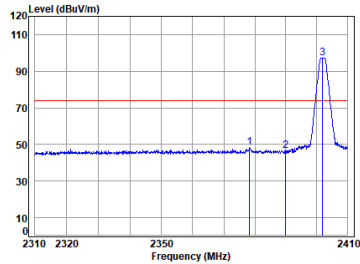

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2402 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 2378.344	16.12	29.10	32.79	35.83	48.26	74.00	-25.74	Peak	0.00
2 2390.000	16.13	29.10	32.78	34.15	46.60	74.00	-27.40	Peak	0.00
3 p 2402.000	16.15	29.09	32.77	84.82	97.29	74.00	23.29	Peak	0.00


BLE_2M_TX_CH_00_Horizontal-Avg

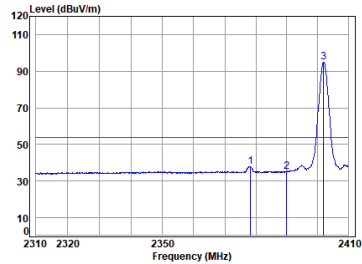

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2402 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 2378.243	16.12	29.10	32.79	25.58	38.01	54.00	-15.99	Average	0.00
2 2390.000	16.13	29.10	32.78	22.87	35.32	54.00	-18.68	Average	0.00
3 q 2402.000	16.15	29.09	32.77	82.48	94.95	54.00	40.95	Average	0.00


BLE_2M_TX_CH_00_Vertical-Peak

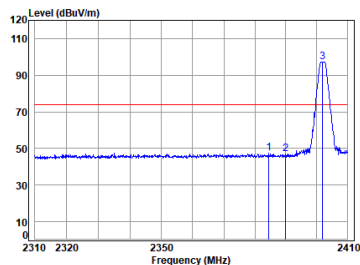

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2402 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 2384.500	16.13	29.10	32.78	35.13	47.58	74.00	-26.42	Peak	0.00
2 2390.000	16.13	29.10	32.78	34.64	47.09	74.00	-26.91	Peak	0.00
3 p 2402.000	16.15	29.09	32.77	84.84	97.31	74.00	23.31	Peak	0.00

BLE_2M_TX_CH_00_Vertical-Avg

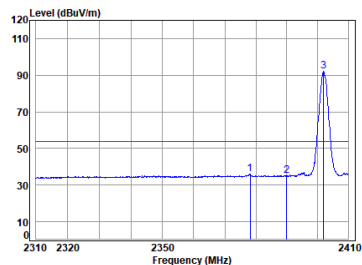


Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2402 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 2378.142	16.12	29.10	32.79	23.54	35.97	54.00	-18.03	Average	0.00
2 2390.000	16.13	29.10	32.78	22.62	35.07	54.00	-18.93	Average	0.00
3 q 2402.000	16.15	29.09	32.77	79.53	92.00	54.00	38.00	Average	0.00




BLE_2M_TX_CH_39_Horizontal-Peak

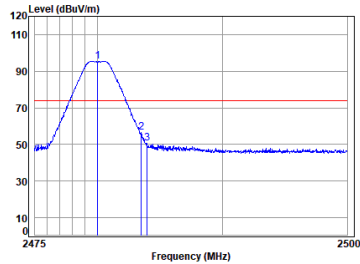

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2480 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 p 2480.000	16.27	28.90	32.73	83.06	95.50	74.00	21.50	Peak	0.00
2 2483.500	16.28	28.90	32.73	43.99	56.44	74.00	-17.56	Peak	0.00
3 2483.946	16.28	28.90	32.73	38.20	50.65	74.00	-23.35	Peak	0.00


BLE_2M_TX_CH_39_Horizontal-Avg

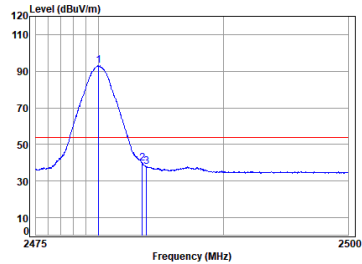

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2480 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q 2480.000	16.27	28.90	32.73	80.56	93.00	54.00	39.00	Average	0.00
2 2483.500	16.28	28.90	32.73	27.44	39.89	54.00	-14.11	Average	0.00
3 2483.821	16.28	28.90	32.73	25.54	37.99	54.00	-16.01	Average	0.00


BLE_2M_TX_CH_39_Vertical-Peak

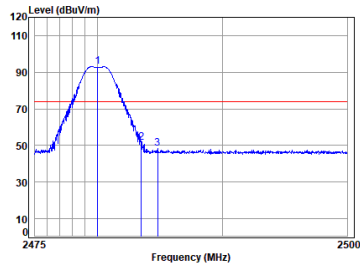

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2480 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 p 2480.000	16.27	28.90	32.73	80.67	93.11	74.00	19.11	Peak	0.00
2 2483.500	16.28	28.90	32.73	39.30	51.75	74.00	-22.25	Peak	0.00
3 2484.795	16.28	28.90	32.73	35.74	48.19	74.00	-25.81	Peak	0.00

BLE_2M_TX_CH_39_Vertical-Avg

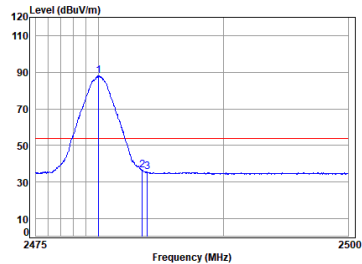

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2480 Band edge
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q 2480.000	16.27	28.90	32.73	75.47	87.91	54.00	33.91	Average	0.00
2 2483.500	16.28	28.90	32.73	24.06	36.51	54.00	-17.49	Average	0.00
3 2483.896	16.28	28.90	32.73	22.96	35.41	54.00	-18.59	Average	0.00



7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2020) Section 6.4,6.5
 Measurement Distance: 3m
 Test Engineer: Mason Wu

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

Note

1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

2. At frequencies below 1GHz, measurements may be performed at a distance different to specified in the regulations.

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Below 30MHz, Aux Factor = 40 dB/decade of distance, the aux factor is $40\log(3/300) = -80\text{dB}$ (for 3m test distance).

EX. Above 30MHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(10/3) = 10.46\text{dB}$ (for 10m test distance).

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C Humidity: 46.8 % RH Atmospheric Pressure: 1020 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Pre-scan	02	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
 Shenzhen Branch (Shenzhen) CSTC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.3.3 Test Setup Diagram

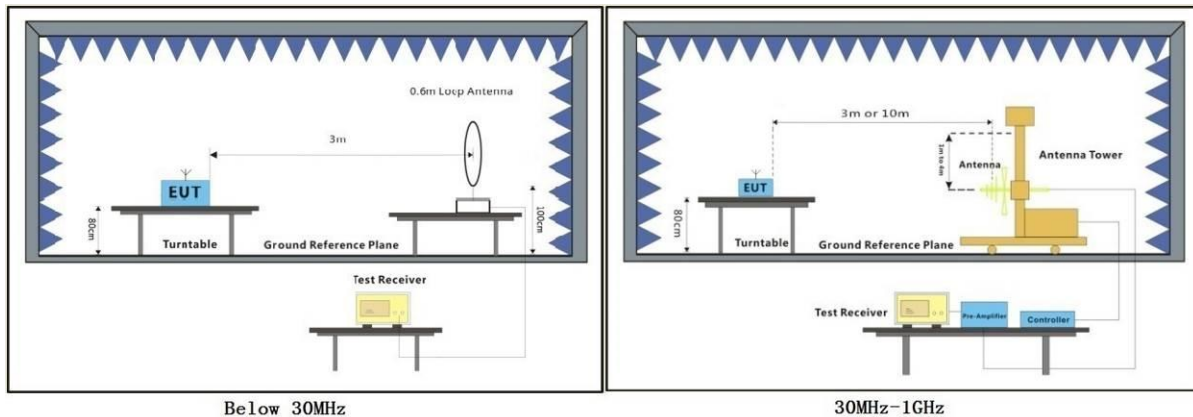

7.3.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8m above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3m or 10m away from the interference-receiving antenna, which was mounted on the variable-height antenna tower.
- The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1m) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the worst-case test curve is displayed.




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260100009502

Page: 28 of 84

9kHz-150kHz; Test Mode: 01; Polarity: Coaxial

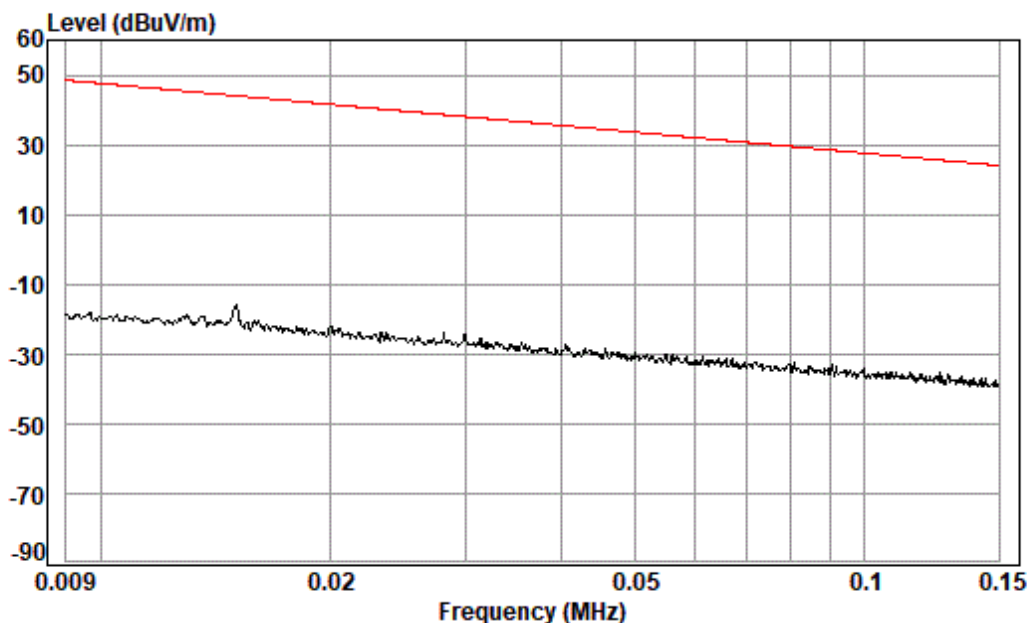

Condition: 3m

Job No. : 00095AT

Test Mode: 01

: coaxial



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260100009502

Page: 29 of 84

9kHz-150kHz; Test Mode: 01; Polarity: Coplanar

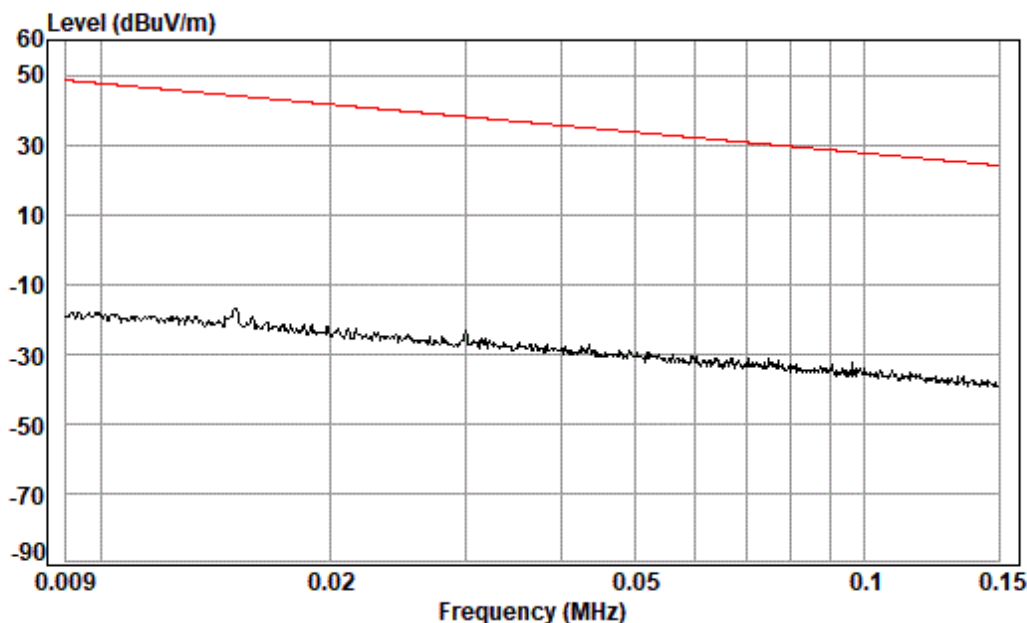

Condition: 3m

Job No. : 00095AT

Test Mode: 01

: coplanar




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

150kHz-30MHz; Test Mode: 01; Polarity: Coaxial

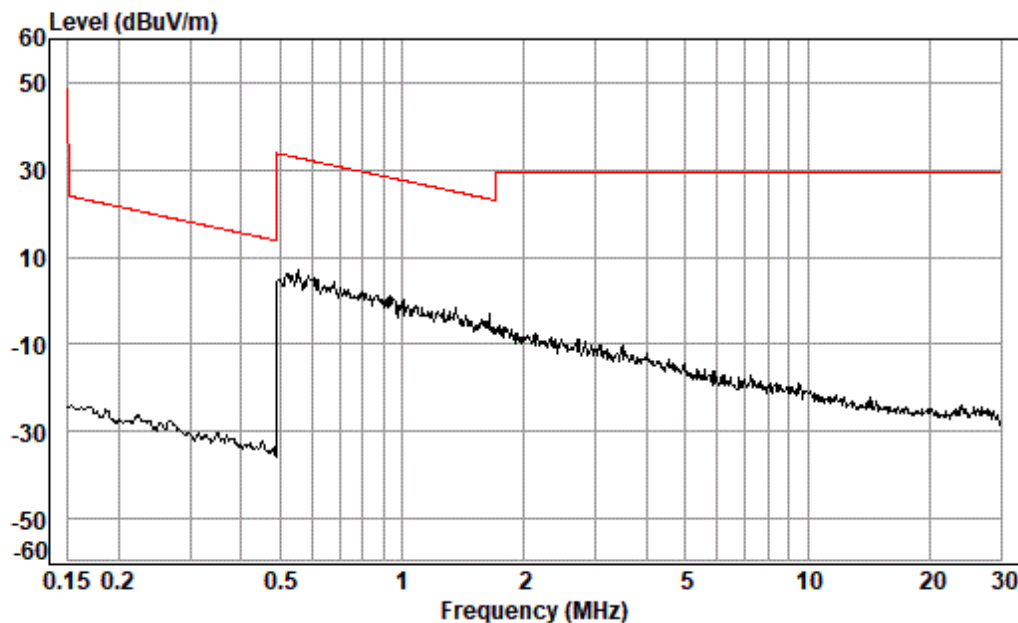

Condition: 3m


Job No. : 00095AT

Test Mode: 01

: coaxial



150kHz-30MHz; Test Mode: 01; Polarity: Coplanar

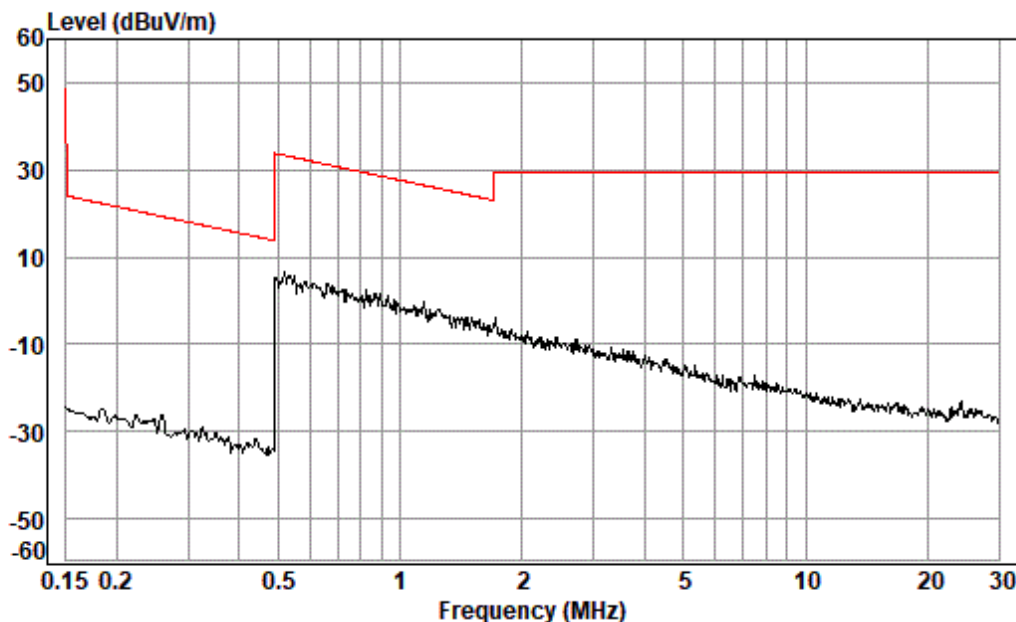

Condition: 3m


Job No. : 00095AT

Test Mode: 01

: coplanar



Test Mode: 01; Polarity: Horizontal

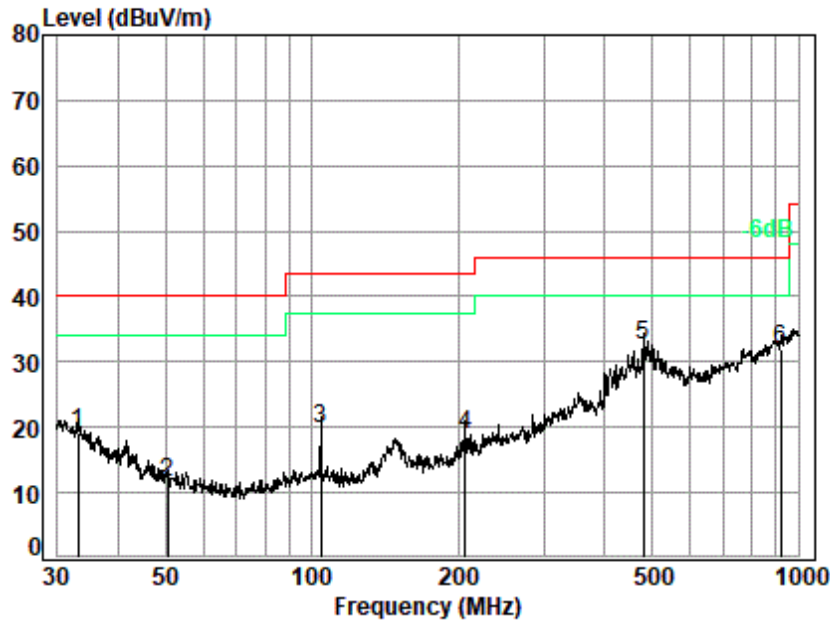

Site : chamber
Condition: 3m HORIZONTAL
Job No. : 00095AT/00096AT
Test Mode: 01


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1	33.095	19.77	0.77	27.65	26.37	19.26	40.00	-20.74 QP
2	50.586	12.91	0.90	27.63	25.29	11.47	40.00	-28.53 QP
3	104.170	12.48	1.25	27.61	33.59	19.71	43.50	-23.79 QP
4	207.123	14.72	1.74	27.77	30.16	18.85	43.50	-24.65 QP
5 q	480.528	22.49	2.75	27.91	35.15	32.48	46.00	-13.52 QP
6	919.287	28.73	4.02	26.85	26.17	32.07	46.00	-13.93 QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 01; Polarity: Vertical

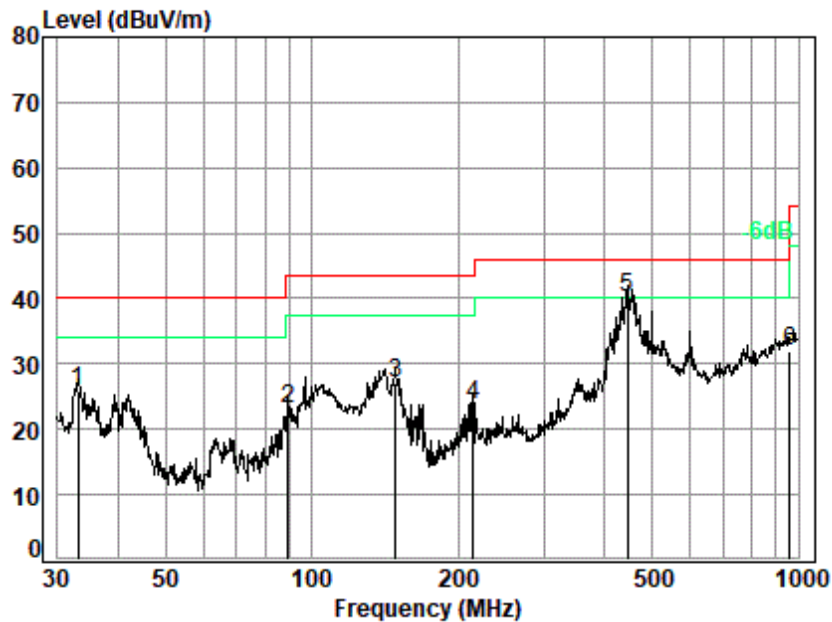

Site : chamber
Condition: 3m VERTICAL
Job No. : 00095AT/00096AT
Test Mode: 01

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1	33.095	19.77	0.77	27.65	32.87	25.76	40.00	-14.24 QP
2	89.276	11.72	1.17	27.60	37.78	23.07	43.50	-20.43 QP
3	148.441	13.10	1.49	27.71	40.25	27.13	43.50	-16.37 QP
4	214.514	14.97	1.77	27.75	34.65	23.64	43.50	-19.86 QP
5 q	444.851	20.88	2.64	27.84	44.42	40.10	46.00	-5.90 QP
6	958.794	29.31	4.09	26.63	25.30	32.07	46.00	-13.93 QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2020) Section 6.6
 Measurement Distance: 1m & 3m
 Test Engineer: Logic Wang

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

Note:

At Above 18GHz, measurements may be performed at a distance shorter than that specified in the regulations

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Above 18GHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(1/3) = -9.54\text{dB}$ (for 1m test distance).

7.4.1 E.U.T. Operation

Operating Environment:


Temperature: 23.5 °C Humidity: 56.3 % RH Atmospheric Pressure: 1020 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	02	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.



7.4.3 Test Setup Diagram

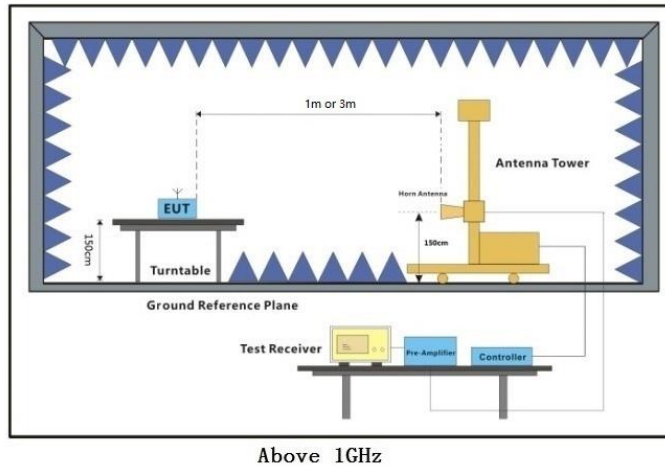

7.4.4 Measurement Procedure and Data


- For above 1GHz, the EUT was placed on the top of a rotating table 1.5m above the ground at a 3m fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3m away from the interference-receiving antenna from 1GHz to 18GHz, and 1m away from the interference-receiving antenna above 18GHz.
- The interference-receiving antenna was mounted on the variable-height antenna tower, with its boresight facing the EUT throughout the test.
- The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- Scan from 1GHz to 10th harmonic of the highest frequency or 40 GHz, whichever is lower.
- As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
- For the frequency above 18GHz, testing had been executed under all test modes, only the worst-case test curve is displayed in the report.
- For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst-case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.




SY Antenna:

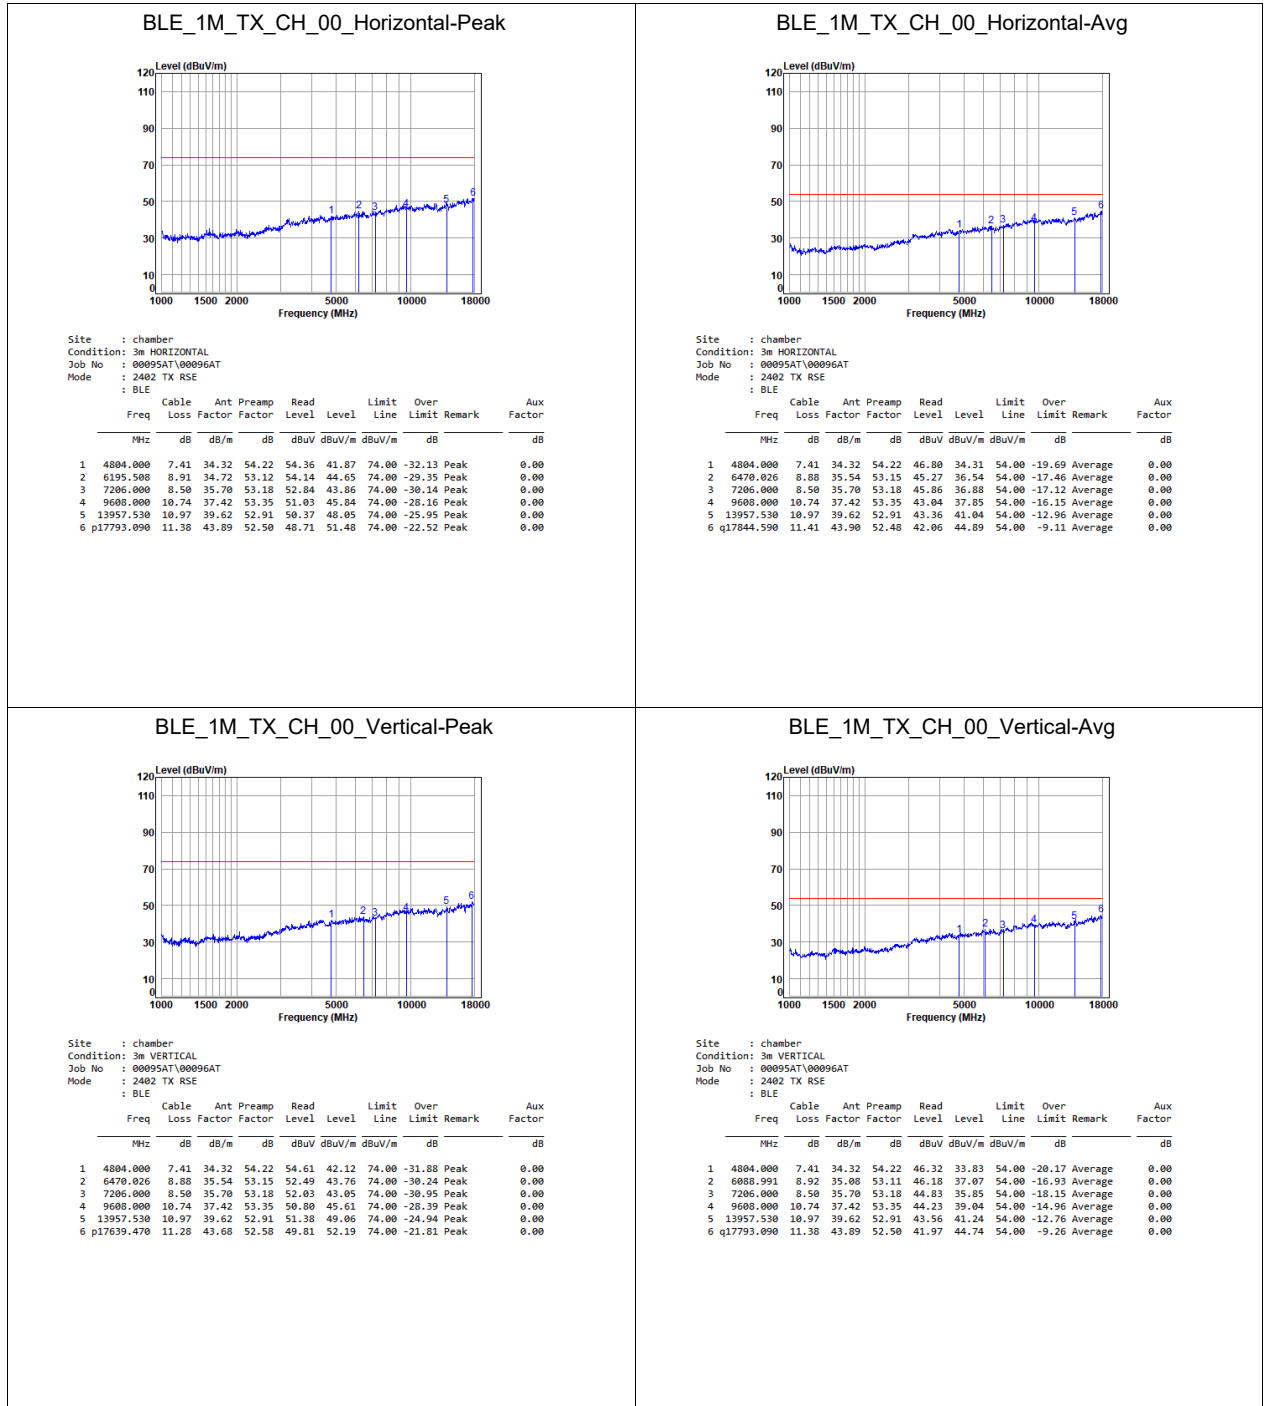

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


BLE_1M_TX_CH_19_Horizontal-Peak

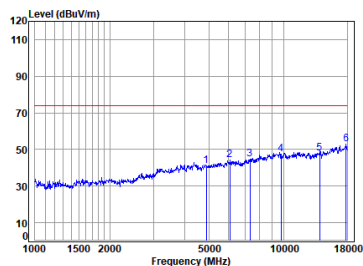

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2440 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4880.000	7.47	34.62	54.21	53.38	41.26	74.00	-32.74	Peak	0.00
2 6071.417	8.92	35.04	53.11	53.60	44.45	74.00	-29.55	Peak	0.00
3 7320.000	8.46	35.70	53.17	53.65	44.64	74.00	-29.36	Peak	0.00
4 9760.000	10.69	37.38	53.29	52.82	47.60	74.00	-26.40	Peak	0.00
5 13957.530	10.97	39.62	52.91	50.31	47.99	74.00	-26.01	Peak	0.00
6 p17844.590	11.41	43.90	52.48	50.22	53.05	74.00	-20.95	Peak	0.00


BLE_1M_TX_CH_19_Horizontal-Avg

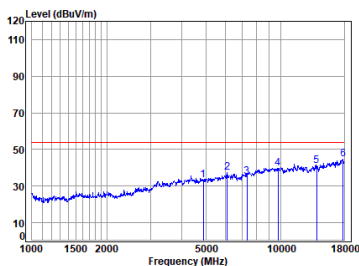

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2440 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4880.000	7.47	34.62	54.21	45.58	33.46	54.00	-20.54	Average	0.00
2 6106.616	8.92	35.07	53.11	46.42	37.30	54.00	-16.70	Average	0.00
3 7320.000	8.46	35.70	53.17	44.18	35.17	54.00	-18.83	Average	0.00
4 9760.000	10.69	37.38	53.29	44.93	39.71	54.00	-14.29	Average	0.00
5 13957.530	10.97	39.62	52.91	43.49	41.17	54.00	-12.83	Average	0.00
6 q17793.090	11.38	43.89	52.50	41.80	44.57	54.00	-9.43	Average	0.00


BLE_1M_TX_CH_19_Vertical-Peak

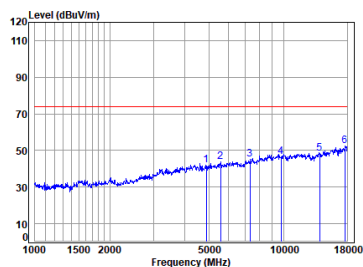

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2440 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4880.000	7.47	34.62	54.21	54.29	42.17	74.00	-31.83	Peak	0.00
2 5583.251	8.29	34.70	53.53	54.45	43.91	74.00	-30.09	Peak	0.00
3 7320.000	8.46	35.70	53.17	54.40	45.39	74.00	-28.61	Peak	0.00
4 9760.000	10.69	37.38	53.29	51.85	46.63	74.00	-27.37	Peak	0.00
5 13957.530	10.97	39.62	52.91	50.63	48.31	74.00	-25.69	Peak	0.00
6 p17639.470	11.28	43.68	52.58	49.98	52.36	74.00	-21.64	Peak	0.00

BLE_1M_TX_CH_19_Vertical-Avg

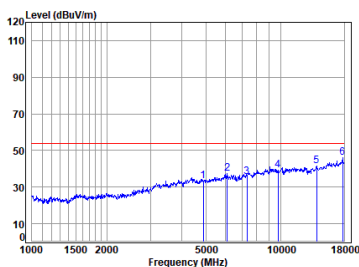


Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2440 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4880.000	7.47	34.62	54.21	45.64	33.52	54.00	-20.48	Average	0.00
2 6088.991	8.92	35.08	53.11	46.49	37.38	54.00	-16.62	Average	0.00
3 7320.000	8.46	35.70	53.17	44.48	35.47	54.00	-18.53	Average	0.00
4 9760.000	10.69	37.38	53.29	44.55	39.33	54.00	-14.67	Average	0.00
5 13957.530	10.97	39.62	52.91	43.69	41.37	54.00	-12.63	Average	0.00
6 q17741.740	11.35	43.84	52.53	43.42	46.08	54.00	-7.92	Average	0.00




BLE_1M_TX_CH_39_Horizontal-Peak

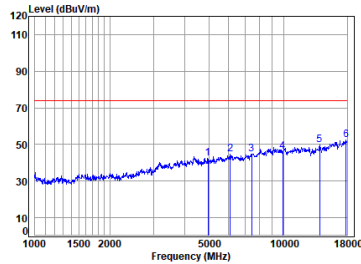

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2480 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4960.000	7.53	34.56	54.20	54.72	42.61	74.00	-31.39	Peak	0.00
2 6088.991	8.92	35.08	53.11	53.94	44.83	74.00	-29.17	Peak	0.00
3 7440.000	8.43	35.96	53.15	53.55	44.79	74.00	-29.21	Peak	0.00
4 9920.000	10.64	37.30	53.23	51.46	46.17	74.00	-27.83	Peak	0.00
5 13957.530	10.97	39.62	52.91	52.05	49.73	74.00	-24.27	Peak	0.00
6 p17844.590	11.41	43.90	52.48	49.68	52.51	74.00	-21.49	Peak	0.00


BLE_1M_TX_CH_39_Horizontal-Avg

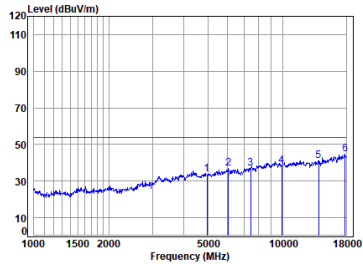

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2480 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4960.000	7.53	34.56	54.20	45.95	33.84	54.00	-20.16	Average	0.00
2 6088.991	8.92	35.01	53.11	45.93	36.75	54.00	-17.25	Average	0.00
3 7440.000	8.43	35.96	53.15	45.92	37.16	54.00	-16.84	Average	0.00
4 9920.000	10.64	37.30	53.23	43.75	38.46	54.00	-15.54	Average	0.00
5 13957.530	10.97	39.62	52.91	43.41	41.09	54.00	-12.91	Average	0.00
6 q17793.090	11.38	43.89	52.50	41.77	44.54	54.00	-9.46	Average	0.00


BLE_1M_TX_CH_39_Vertical-Peak

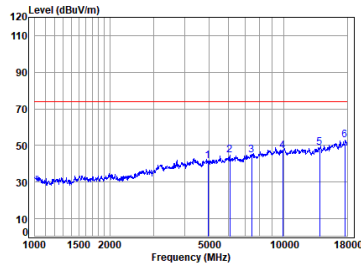

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2480 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4960.000	7.53	34.56	54.20	53.64	41.53	74.00	-32.47	Peak	0.00
2 6071.417	8.92	35.04	53.11	54.06	44.91	74.00	-29.09	Peak	0.00
3 7440.000	8.43	35.96	53.15	53.30	44.54	74.00	-29.46	Peak	0.00
4 9920.000	10.64	37.30	53.23	52.06	46.77	74.00	-27.23	Peak	0.00
5 13957.530	10.97	39.62	52.91	51.28	48.96	74.00	-25.04	Peak	0.00
6 p17639.470	11.28	43.68	52.58	50.48	52.86	74.00	-21.14	Peak	0.00

BLE_1M_TX_CH_39_Vertical-Avg

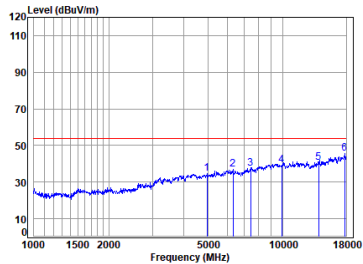


Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2480 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4960.000	7.53	34.56	54.20	46.94	34.83	54.00	-19.17	Average	0.00
2 6322.136	8.90	34.96	53.13	46.26	36.99	54.00	-17.01	Average	0.00
3 7440.000	8.43	35.96	53.15	46.19	37.43	54.00	-16.57	Average	0.00
4 9920.000	10.64	37.30	53.23	44.34	39.05	54.00	-14.95	Average	0.00
5 13957.530	10.97	39.62	52.91	42.90	40.58	54.00	-13.42	Average	0.00
6 q17741.740	11.35	43.84	52.53	43.11	45.77	54.00	-8.23	Average	0.00




BLE_2M_TX_CH_00_Horizontal-Peak

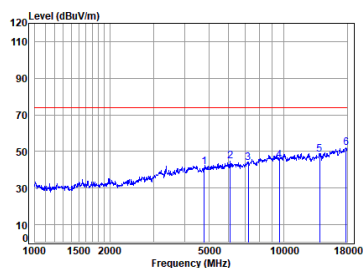

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2402 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4804.000	7.41	34.32	54.22	53.95	41.46	74.00	-32.54	Peak	0.00
2 6106.616	8.92	35.07	53.11	53.84	44.72	74.00	-29.28	Peak	0.00
3 7206.000	8.50	35.70	53.18	52.75	43.77	74.00	-30.23	Peak	0.00
4 9600.000	10.74	37.42	53.35	50.42	45.23	74.00	-28.77	Peak	0.00
5 13957.530	10.97	39.62	52.91	50.71	48.39	74.00	-25.61	Peak	0.00
6 p17793.090	11.38	43.89	52.50	49.36	52.13	74.00	-21.87	Peak	0.00


BLE_2M_TX_CH_00_Horizontal-Avg

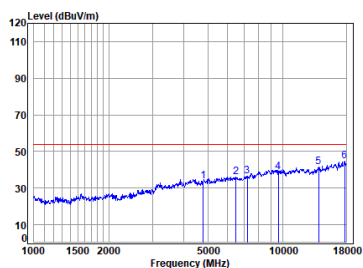

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2402 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4804.000	7.41	34.32	54.22	46.14	33.65	54.00	-20.35	Average	0.00
2 6488.754	8.88	35.58	53.15	44.92	36.23	54.00	-17.77	Average	0.00
3 7206.000	8.50	35.70	53.18	45.28	36.30	54.00	-17.70	Average	0.00
4 9600.000	10.74	37.42	53.35	43.90	38.71	54.00	-15.29	Average	0.00
5 13957.530	10.97	39.62	52.91	43.62	41.30	54.00	-12.70	Average	0.00
6 q17741.740	11.35	43.84	52.53	42.02	44.68	54.00	-9.32	Average	0.00


BLE_2M_TX_CH_00_Vertical-Peak

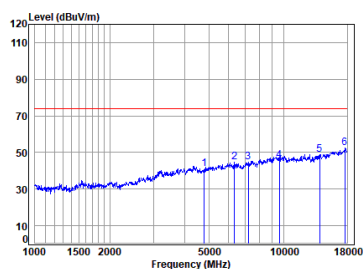

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2402 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4804.000	7.41	34.32	54.22	53.76	41.27	74.00	-32.73	Peak	0.00
2 6340.436	8.90	34.92	53.14	53.87	44.55	74.00	-29.45	Peak	0.00
3 7206.000	8.50	35.70	53.18	53.52	44.54	74.00	-29.46	Peak	0.00
4 9600.000	10.74	37.42	53.35	50.72	45.53	74.00	-28.47	Peak	0.00
5 13957.530	10.97	39.62	52.91	51.25	48.93	74.00	-25.07	Peak	0.00
6 p17588.560	11.25	43.58	52.60	50.04	52.27	74.00	-21.73	Peak	0.00

BLE_2M_TX_CH_00_Vertical-Avg

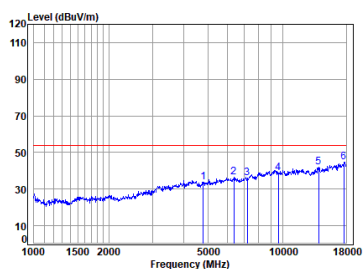


Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2402 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4804.000	7.41	34.32	54.22	46.34	33.85	54.00	-20.15	Average	0.00
2 6377.195	8.89	35.06	53.14	45.53	36.34	54.00	-17.66	Average	0.00
3 7206.000	8.50	35.70	53.18	45.15	36.17	54.00	-17.83	Average	0.00
4 9600.000	10.74	37.42	53.35	43.77	38.50	54.00	-15.42	Average	0.00
5 13957.530	10.97	39.62	52.91	44.26	41.94	54.00	-12.06	Average	0.00
6 q17588.560	11.25	43.58	52.60	42.57	44.80	54.00	-9.20	Average	0.00




BLE_2M_TX_CH_19_Horizontal-Peak

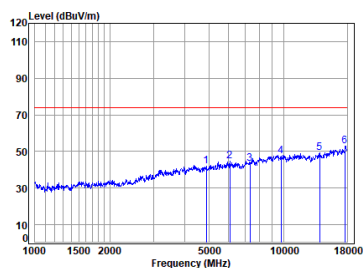

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2440 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4880.000	7.47	34.62	54.21	54.05	41.93	74.00	-32.07	Peak	0.00
2 6071.417	8.92	35.04	53.11	53.73	44.58	74.00	-29.42	Peak	0.00
3 7320.000	8.46	35.70	53.17	52.23	43.22	74.00	-30.78	Peak	0.00
4 9760.000	10.69	37.38	53.29	52.72	47.50	74.00	-26.50	Peak	0.00
5 13957.530	10.97	39.62	52.91	51.48	49.16	74.00	-24.84	Peak	0.00
6 p17639.470	11.28	43.68	52.58	50.39	52.77	74.00	-21.23	Peak	0.00


BLE_2M_TX_CH_19_Horizontal-Avg

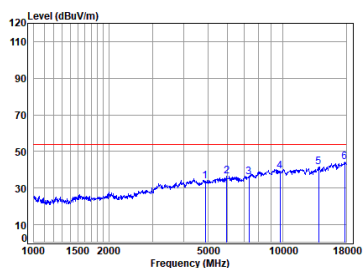

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2440 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4880.000	7.47	34.62	54.21	45.99	33.87	54.00	-20.13	Average	0.00
2 5949.811	8.86	34.70	53.15	46.25	36.66	54.00	-17.34	Average	0.00
3 7320.000	8.46	35.70	53.17	45.01	36.00	54.00	-18.00	Average	0.00
4 9760.000	10.69	37.38	53.29	44.48	39.26	54.00	-14.74	Average	0.00
5 13957.530	10.97	39.62	52.91	43.81	41.49	54.00	-12.51	Average	0.00
6 q17741.740	11.35	43.84	52.53	41.77	44.43	54.00	-9.57	Average	0.00


BLE_2M_TX_CH_19_Vertical-Peak

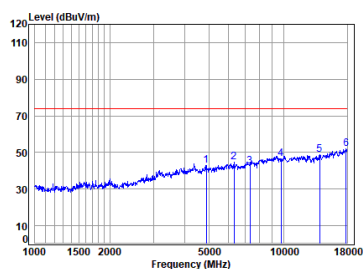

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2440 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4880.000	7.47	34.62	54.21	55.00	42.88	74.00	-31.12	Peak	0.00
2 6322.136	8.90	34.96	53.13	53.78	44.51	74.00	-29.49	Peak	0.00
3 7320.000	8.46	35.70	53.17	51.22	42.21	74.00	-31.79	Peak	0.00
4 9760.000	10.69	37.38	53.29	51.71	46.49	74.00	-27.51	Peak	0.00
5 13957.530	10.97	39.62	52.91	51.03	48.71	74.00	-25.29	Peak	0.00
6 p17793.090	11.38	43.89	52.50	49.36	52.13	74.00	-21.87	Peak	0.00

BLE_2M_TX_CH_19_Vertical-Avg

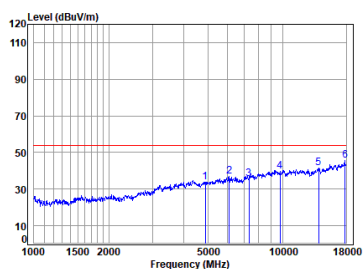

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2440 TX RSE
BLE


Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4880.000	7.47	34.62	54.21	46.03	33.91	54.00	-20.09	Average	0.00
2 6106.616	8.92	35.07	53.11	46.07	36.95	54.00	-17.05	Average	0.00
3 7320.000	8.46	35.70	53.17	44.56	35.55	54.00	-18.45	Average	0.00
4 9760.000	10.69	37.38	53.29	45.00	39.06	54.00	-14.94	Average	0.00
5 13957.530	10.97	39.62	52.91	43.91	41.59	54.00	-12.41	Average	0.00
6 q17793.090	11.38	43.89	52.50	42.87	45.64	54.00	-8.36	Average	0.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


BLE_2M_TX_CH_39_Horizontal-Peak

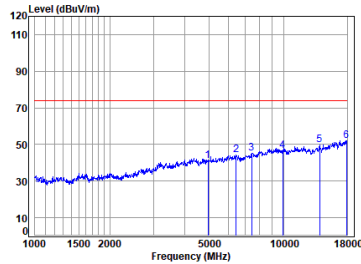

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2480 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4960.000	7.53	34.56	54.20	53.18	41.07	74.00	-32.93	Peak	0.00
2 6451.353	8.88	35.50	53.15	52.92	44.15	74.00	-29.85	Peak	0.00
3 7440.000	8.43	35.96	53.15	53.94	45.18	74.00	-28.82	Peak	0.00
4 9920.000	10.64	37.30	53.23	51.94	46.65	74.00	-27.35	Peak	0.00
5 13957.530	10.97	39.62	52.91	52.15	49.83	74.00	-24.17	Peak	0.00
6 p17896.250	11.44	43.90	52.45	49.16	52.05	74.00	-21.95	Peak	0.00


BLE_2M_TX_CH_39_Horizontal-Avg

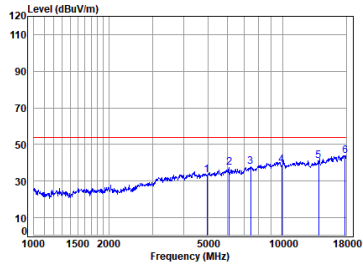

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2480 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4960.000	7.53	34.56	54.20	45.58	33.47	54.00	-20.53	Average	0.00
2 6088.991	8.92	35.08	53.11	46.53	37.42	54.00	-16.58	Average	0.00
3 7440.000	8.43	35.96	53.15	46.41	37.65	54.00	-16.35	Average	0.00
4 9920.000	10.64	37.30	53.23	44.19	38.90	54.00	-15.10	Average	0.00
5 13957.530	10.97	39.62	52.91	43.49	41.17	54.00	-12.83	Average	0.00
6 q17844.590	11.41	43.90	52.48	41.19	44.02	54.00	-9.98	Average	0.00


BLE_2M_TX_CH_39_Vertical-Peak

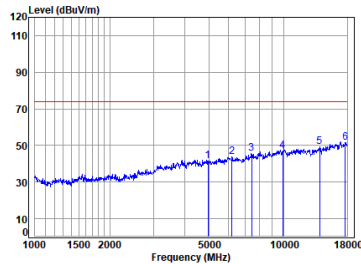

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2480 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4960.000	7.53	34.56	54.20	53.42	41.31	74.00	-32.69	Peak	0.00
2 6195.508	8.91	34.72	53.12	53.26	43.77	74.00	-30.23	Peak	0.00
3 7440.000	8.43	35.96	53.15	54.17	45.41	74.00	-28.59	Peak	0.00
4 9920.000	10.64	37.30	53.23	52.09	46.00	74.00	-27.20	Peak	0.00
5 13957.530	10.97	39.62	52.91	51.71	49.39	74.00	-24.61	Peak	0.00
6 p17690.530	11.32	43.78	52.55	49.15	51.70	74.00	-22.30	Peak	0.00

BLE_2M_TX_CH_39_Vertical-Avg

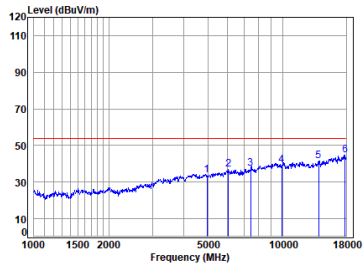


Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2480 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4960.000	7.53	34.56	54.20	46.01	33.90	54.00	-20.10	Average	0.00
2 6053.894	8.92	35.01	53.11	45.97	36.79	54.00	-17.21	Average	0.00
3 7440.000	8.43	35.96	53.15	45.96	37.20	54.00	-16.80	Average	0.00
4 9920.000	10.64	37.30	53.23	44.52	39.23	54.00	-14.77	Average	0.00
5 13957.530	10.97	39.62	52.91	44.83	41.71	54.00	-12.29	Average	0.00
6 q17793.090	11.38	43.89	52.50	42.87	44.84	54.00	-9.16	Average	0.00




YD Antenna:

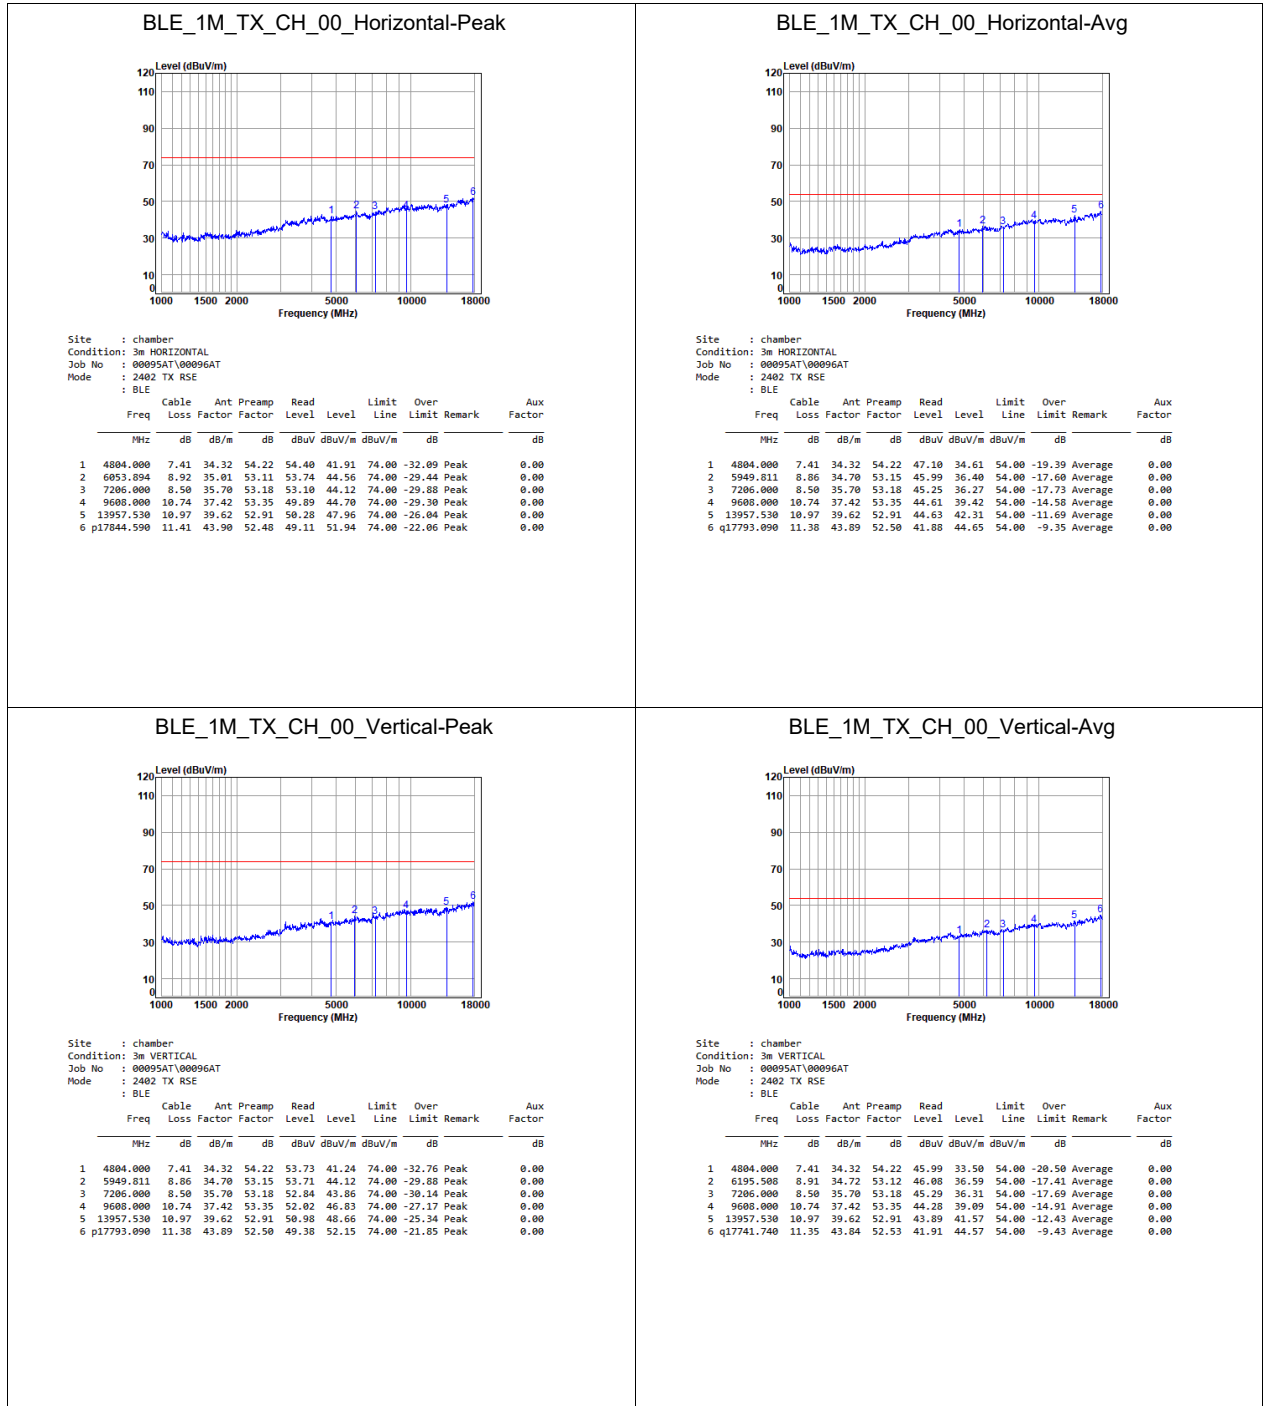

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


BLE_1M_TX_CH_19_Horizontal-Peak

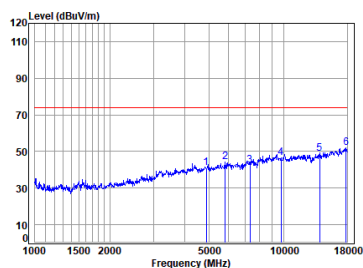

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2440 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 4880.000	7.47	34.62	54.21	53.36	41.24	74.00	-32.76 Peak	0.00
2 5830.640	8.68	34.36	53.27	54.37	44.14	74.00	-29.86 Peak	0.00
3 7320.000	8.46	35.70	53.17	51.34	42.33	74.00	-31.67 Peak	0.00
4 9760.000	10.69	37.38	53.29	51.03	46.61	74.00	-27.39 Peak	0.00
5 13957.530	10.97	39.62	52.91	51.00	48.68	74.00	-25.32 Peak	0.00
6 p17844.590	11.41	43.90	52.48	49.30	52.13	74.00	-21.87 Peak	0.00


BLE_1M_TX_CH_19_Horizontal-Avg

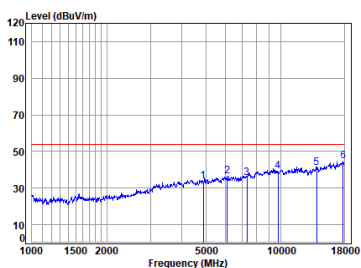

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2440 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 4880.000	7.47	34.62	54.21	45.88	33.76	54.00	-20.24 Average	0.00
2 6088.991	8.92	35.08	53.11	45.75	36.64	54.00	-17.36 Average	0.00
3 7320.000	8.46	35.70	53.17	44.76	35.75	54.00	-18.25 Average	0.00
4 9760.000	10.69	37.38	53.29	44.30	39.08	54.00	-14.92 Average	0.00
5 13957.530	10.97	39.62	52.91	43.39	40.88	54.00	-13.12 Average	0.00
6 q17793.090	11.38	43.89	52.50	42.12	44.89	54.00	-9.11 Average	0.00


BLE_1M_TX_CH_19_Vertical-Peak

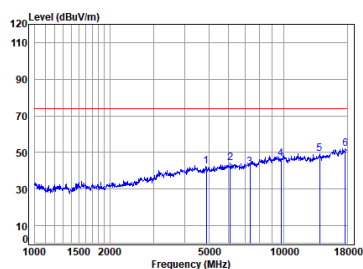

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2440 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 4880.000	7.47	34.62	54.21	54.43	42.31	74.00	-31.69 Peak	0.00
2 6106.616	8.92	35.07	53.11	53.41	44.29	74.00	-29.71 Peak	0.00
3 7320.000	8.46	35.70	53.17	50.96	41.95	74.00	-32.05 Peak	0.00
4 9760.000	10.69	37.38	53.29	51.77	46.55	74.00	-27.45 Peak	0.00
5 13957.530	10.97	39.62	52.91	51.54	49.22	74.00	-24.78 Peak	0.00
6 p17690.530	11.32	43.78	52.55	49.27	51.82	74.00	-22.18 Peak	0.00

BLE_1M_TX_CH_19_Vertical-Avg

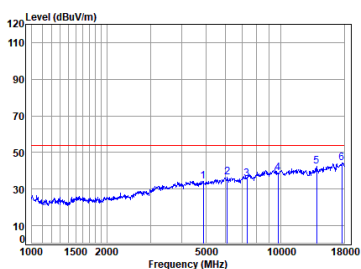

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2440 TX RSE
BLE


Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 4880.000	7.47	34.62	54.21	46.26	34.14	54.00	-19.86 Average	0.00
2 6088.991	8.92	35.08	53.11	45.50	36.39	54.00	-17.61 Average	0.00
3 7320.000	8.46	35.70	53.17	44.65	35.64	54.00	-18.36 Average	0.00
4 9760.000	10.69	37.38	53.29	44.82	38.00	54.00	-15.20 Average	0.00
5 13957.530	10.97	39.62	52.91	44.77	42.45	54.00	-11.55 Average	0.00
6 q17588.560	11.25	43.58	52.60	41.97	44.20	54.00	-9.80 Average	0.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


BLE_1M_TX_CH_39_Horizontal-Peak

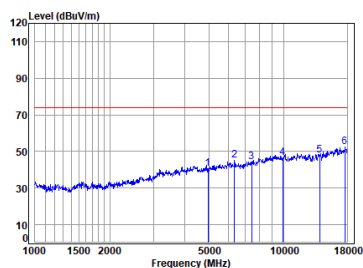

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2480 TX RSE
BLE

Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB		dB
1 4960.000	7.53	34.56	54.20	52.70	40.59	74.00	-33.41	Peak		0.00
2 6340.436	8.90	34.92	53.14	54.31	44.99	74.00	-29.01	Peak		0.00
3 7440.000	8.43	35.96	53.15	53.05	44.29	74.00	-29.71	Peak		0.00
4 9920.000	10.64	37.30	53.23	51.95	46.66	74.00	-27.34	Peak		0.00
5 13957.530	10.97	39.62	52.91	50.07	47.75	74.00	-26.25	Peak		0.00
6 p17639.470	11.28	43.68	52.58	50.21	52.59	74.00	-21.41	Peak		0.00


BLE_1M_TX_CH_39_Horizontal-Avg

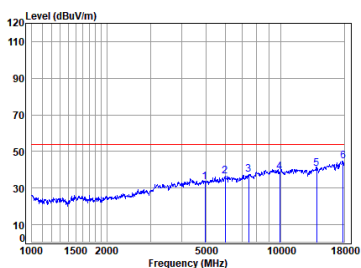

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2480 TX RSE
BLE

Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB		dB
1 4960.000	7.53	34.56	54.20	45.50	33.39	54.00	-20.61	Average		0.00
2 5984.305	8.91	34.84	53.12	45.94	36.57	54.00	-17.43	Average		0.00
3 7440.000	8.43	35.96	53.15	46.33	37.57	54.00	-16.43	Average		0.00
4 9920.000	10.64	37.30	53.23	44.21	38.92	54.00	-15.08	Average		0.00
5 13957.530	10.97	39.62	52.91	42.94	40.62	54.00	-13.38	Average		0.00
6 q17793.090	11.38	43.89	52.50	41.91	44.68	54.00	-9.32	Average		0.00


BLE_1M_TX_CH_39_Vertical-Peak

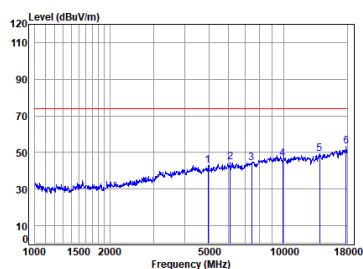

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2480 TX RSE
BLE

Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB		dB
1 4960.000	7.53	34.56	54.20	54.95	42.84	74.00	-31.16	Peak		0.00
2 6085.991	8.92	35.08	53.11	53.81	44.70	74.00	-29.30	Peak		0.00
3 7440.000	8.43	35.96	53.15	53.14	44.38	74.00	-29.62	Peak		0.00
4 9920.000	10.64	37.30	53.23	51.73	46.44	74.00	-27.56	Peak		0.00
5 13957.530	10.97	39.62	52.91	51.41	49.09	74.00	-24.91	Peak		0.00
6 p17793.090	11.38	43.89	52.50	50.53	53.30	74.00	-20.70	Peak		0.00

BLE_1M_TX_CH_39_Vertical-Avg

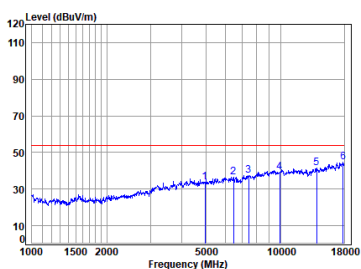


Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2480 TX RSE
BLE

Freq	Cable Loss	Factor	Ant Factor	Preamp	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB		dB
1 4960.000	7.53	34.56	54.20	46.07	33.96	54.00	-20.04	Average		0.00
2 6470.826	8.88	35.54	53.15	45.22	36.49	54.00	-17.51	Average		0.00
3 7440.000	8.43	35.96	53.15	46.18	37.42	54.00	-16.58	Average		0.00
4 9920.000	10.64	37.30	53.23	44.53	39.24	54.00	-14.76	Average		0.00
5 13957.530	10.97	39.62	52.91	43.71	41.39	54.00	-12.61	Average		0.00
6 q17844.590	11.41	43.90	52.48	41.70	44.53	54.00	-9.47	Average		0.00




BLE_2M_TX_CH_00_Horizontal-Peak

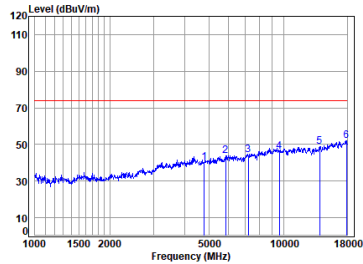

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2402 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4804.000	7.41	34.32	54.22	52.88	40.31	74.00	-33.69	Peak	0.00
2 5847.517	8.70	34.40	53.26	54.02	43.86	74.00	-30.14	Peak	0.00
3 7206.000	8.50	35.70	53.18	53.34	44.36	74.00	-29.64	Peak	0.00
4 9608.000	10.74	37.42	53.35	51.31	46.12	74.00	-27.88	Peak	0.00
5 13957.530	10.97	39.62	52.91	51.04	48.72	74.00	-25.28	Peak	0.00
6 p17896.250	11.44	43.90	52.45	49.05	51.94	74.00	-22.06	Peak	0.00


BLE_2M_TX_CH_00_Horizontal-Avg

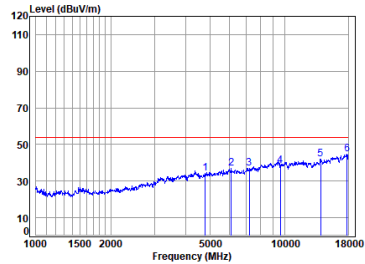

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2402 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4804.000	7.41	34.32	54.22	46.56	34.07	54.00	-19.93	Average	0.00
2 6088.991	8.92	35.08	53.11	46.13	37.02	54.00	-16.98	Average	0.00
3 7206.000	8.50	35.70	53.18	45.96	36.98	54.00	-17.02	Average	0.00
4 9608.000	10.74	37.42	53.35	43.31	38.12	54.00	-15.88	Average	0.00
5 13957.530	10.97	39.62	52.91	44.43	42.11	54.00	-11.89	Average	0.00
6 q17844.590	11.41	43.90	52.48	41.69	44.52	54.00	-9.48	Average	0.00


BLE_2M_TX_CH_00_Vertical-Peak

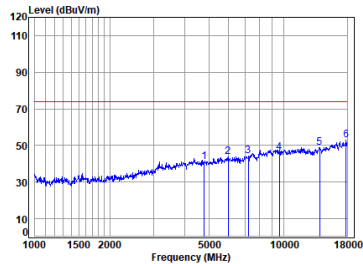

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2402 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4804.000	7.41	34.32	54.22	53.74	41.25	74.00	-32.75	Peak	0.00
2 5984.305	8.91	34.84	53.12	53.22	43.85	74.00	-30.15	Peak	0.00
3 7206.000	8.50	35.70	53.18	53.40	44.42	74.00	-29.58	Peak	0.00
4 9608.000	10.74	37.42	53.35	51.30	46.11	74.00	-27.89	Peak	0.00
5 13957.530	10.97	39.62	52.91	51.09	48.77	74.00	-25.23	Peak	0.00
6 p17844.590	11.41	43.90	52.48	50.11	52.94	74.00	-21.06	Peak	0.00

BLE_2M_TX_CH_00_Vertical-Avg

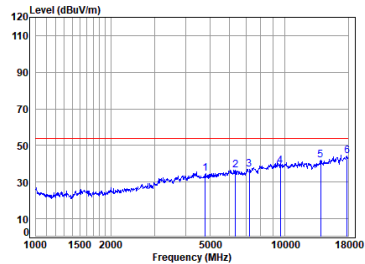

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2402 TX RSE
BLE


Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4804.000	7.41	34.32	54.22	47.10	34.61	54.00	-19.39	Average	0.00
2 6340.436	8.90	34.92	53.14	46.04	36.72	54.00	-17.28	Average	0.00
3 7206.000	8.50	35.70	53.18	45.97	36.99	54.00	-17.01	Average	0.00
4 9608.000	10.74	37.42	53.35	43.83	38.64	54.00	-15.36	Average	0.00
5 13957.530	10.97	39.62	52.91	44.35	42.03	54.00	-11.97	Average	0.00
6 q17844.590	11.41	43.90	52.48	41.46	44.29	54.00	-9.71	Average	0.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


BLE_2M_TX_CH_19_Horizontal-Peak

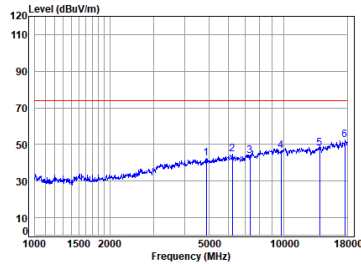

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2440 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4880.000	7.47	34.62	54.21	54.34	42.22	74.00	-31.78	Peak	0.00
2 6213.441	8.91	34.75	53.12	54.01	44.55	74.00	-29.45	Peak	0.00
3 7320.000	8.46	35.70	53.17	52.61	43.60	74.00	-30.40	Peak	0.00
4 9760.000	10.69	37.38	53.29	51.63	46.41	74.00	-27.59	Peak	0.00
5 13957.530	10.97	39.62	52.91	50.38	48.96	74.00	-25.04	Peak	0.00
6 p17588.560	11.25	43.58	52.60	50.20	52.43	74.00	-21.57	Peak	0.00


BLE_2M_TX_CH_19_Horizontal-Avg

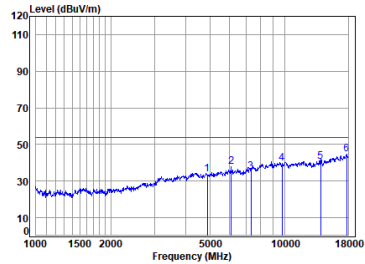

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2440 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4880.000	7.47	34.62	54.21	45.68	33.56	54.00	-20.44	Average	0.00
2 6088.991	8.92	35.08	53.11	46.83	37.72	54.00	-16.28	Average	0.00
3 7320.000	8.46	35.70	53.17	44.20	35.19	54.00	-18.81	Average	0.00
4 9760.000	10.69	37.38	53.29	44.71	39.49	54.00	-14.51	Average	0.00
5 13957.530	10.97	39.62	52.91	42.84	40.52	54.00	-13.48	Average	0.00
6 q17741.740	11.35	43.84	52.53	41.93	44.59	54.00	-9.41	Average	0.00


BLE_2M_TX_CH_19_Vertical-Peak

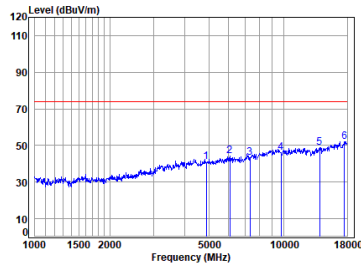

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2440 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4880.000	7.47	34.62	54.21	53.23	41.11	74.00	-32.89	Peak	0.00
2 6071.417	8.92	35.04	53.11	53.38	44.23	74.00	-29.77	Peak	0.00
3 7320.000	8.46	35.70	53.17	52.36	43.35	74.00	-30.65	Peak	0.00
4 9760.000	10.69	37.38	53.29	51.46	46.24	74.00	-27.76	Peak	0.00
5 13957.530	10.97	39.62	52.91	51.02	48.70	74.00	-25.30	Peak	0.00
6 p17537.800	11.22	43.48	52.63	50.04	52.11	74.00	-21.89	Peak	0.00

BLE_2M_TX_CH_19_Vertical-Avg

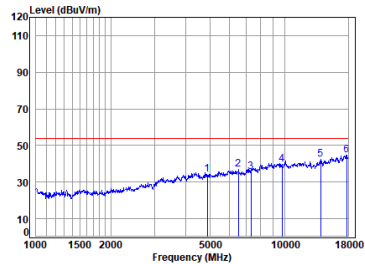


Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2440 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4880.000	7.47	34.62	54.21	46.18	34.06	54.00	-19.94	Average	0.00
2 6526.373	8.86	35.55	53.15	45.68	36.94	54.00	-17.06	Average	0.00
3 7320.000	8.46	35.70	53.17	44.59	35.58	54.00	-18.42	Average	0.00
4 9760.000	10.69	37.38	53.29	44.00	39.58	54.00	-14.42	Average	0.00
5 13957.530	10.97	39.62	52.91	44.85	42.53	54.00	-11.47	Average	0.00
6 q17741.740	11.35	43.84	52.53	42.03	44.69	54.00	-9.31	Average	0.00




BLE_2M_TX_CH_39_Horizontal-Peak

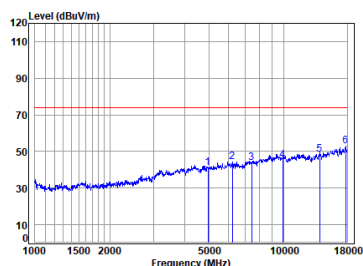

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2480 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4960.000	7.53	34.56	54.20	53.29	41.18	74.00	-32.82	Peak	0.00
2 6231.427	8.91	34.83	53.12	53.86	44.48	74.00	-29.52	Peak	0.00
3 7440.000	8.43	35.96	53.15	52.67	43.91	74.00	-30.09	Peak	0.00
4 9920.000	10.64	37.30	53.23	50.61	45.22	74.00	-28.78	Peak	0.00
5 13957.530	10.97	39.62	52.91	50.61	48.29	74.00	-25.71	Peak	0.00
6 p17741.740	11.35	43.84	52.53	50.08	52.74	74.00	-21.26	Peak	0.00


BLE_2M_TX_CH_39_Horizontal-Avg

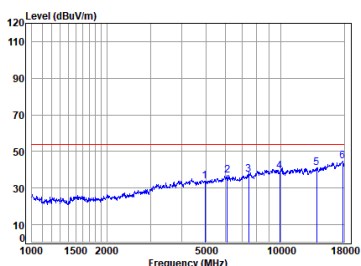

Site : chamber
Condition: 3m HORIZONTAL
Job No : 00095AT\00096AT
Mode : 2480 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4960.000	7.53	34.56	54.20	45.72	33.61	54.00	-20.39	Average	0.00
2 6106.616	8.92	35.07	53.11	46.17	37.05	54.00	-16.95	Average	0.00
3 7440.000	8.43	35.96	53.15	46.07	37.31	54.00	-16.69	Average	0.00
4 9920.000	10.64	37.30	53.23	44.52	39.23	54.00	-14.77	Average	0.00
5 13957.530	10.97	39.62	52.91	43.23	40.91	54.00	-13.09	Average	0.00
6 q17741.740	11.35	43.84	52.53	42.01	44.67	54.00	-9.33	Average	0.00


BLE_2M_TX_CH_39_Vertical-Peak

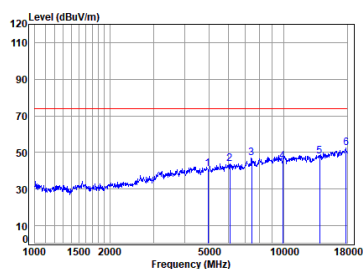

Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2480 TX RSE
BLE

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4960.000	7.53	34.56	54.20	53.22	41.11	74.00	-32.89	Peak	0.00
2 6071.417	8.92	35.04	53.11	53.10	43.95	74.00	-30.05	Peak	0.00
3 7440.000	8.43	35.96	53.15	55.76	47.00	74.00	-27.00	Peak	0.00
4 9920.000	10.64	37.30	53.23	50.61	45.32	74.00	-28.68	Peak	0.00
5 13957.530	10.97	39.62	52.91	50.34	48.02	74.00	-25.98	Peak	0.00
6 p17793.090	11.38	43.89	52.50	49.50	52.27	74.00	-21.73	Peak	0.00

BLE_2M_TX_CH_39_Vertical-Avg

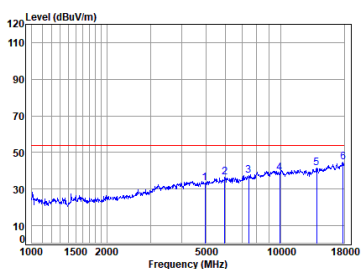


Site : chamber
Condition: 3m VERTICAL
Job No : 00095AT\00096AT
Mode : 2480 TX RSE
BLE


Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4960.000	7.53	34.56	54.20	45.61	33.50	54.00	-20.50	Average	0.00
2 5949.811	8.86	34.70	53.15	46.06	36.47	54.00	-17.53	Average	0.00
3 7440.000	8.43	35.96	53.15	46.14	37.38	54.00	-16.62	Average	0.00
4 9920.000	10.64	37.30	53.23	43.93	38.64	54.00	-15.36	Average	0.00
5 13957.530	10.97	39.62	52.91	43.66	41.34	54.00	-12.66	Average	0.00
6 q17844.590	11.41	43.90	52.48	41.77	44.60	54.00	-9.40	Average	0.00



SY Antenna:

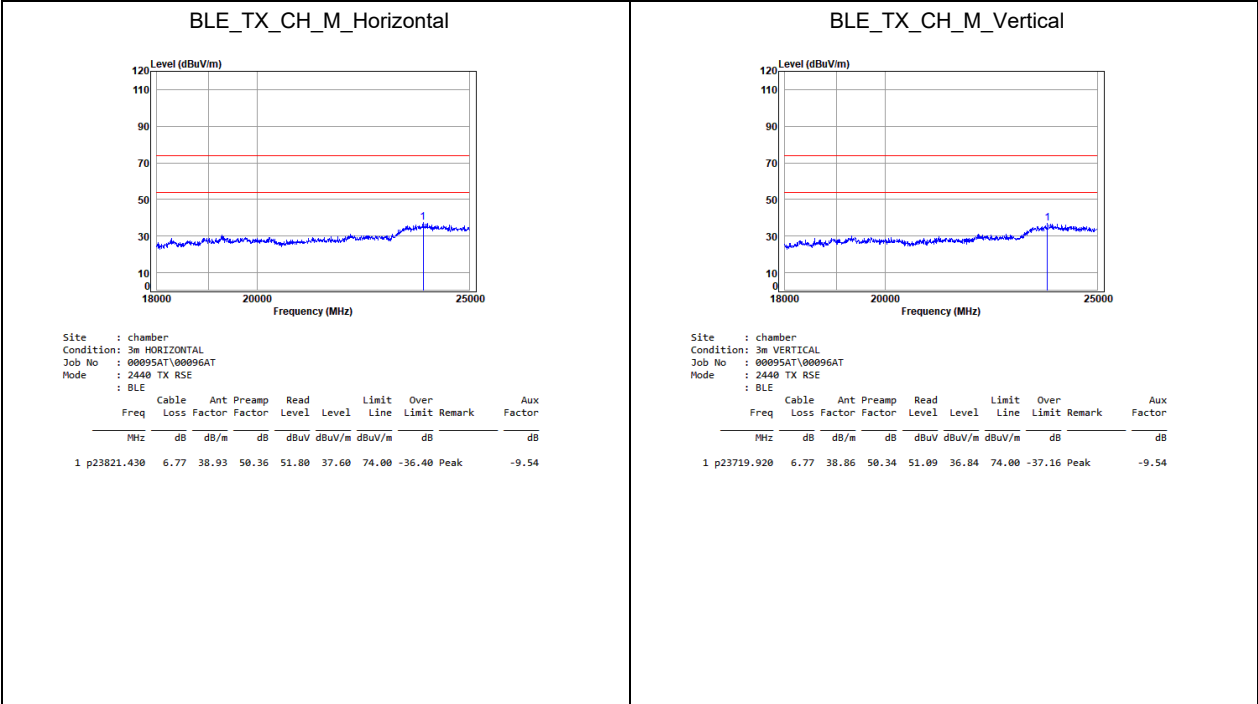

YD Antenna:

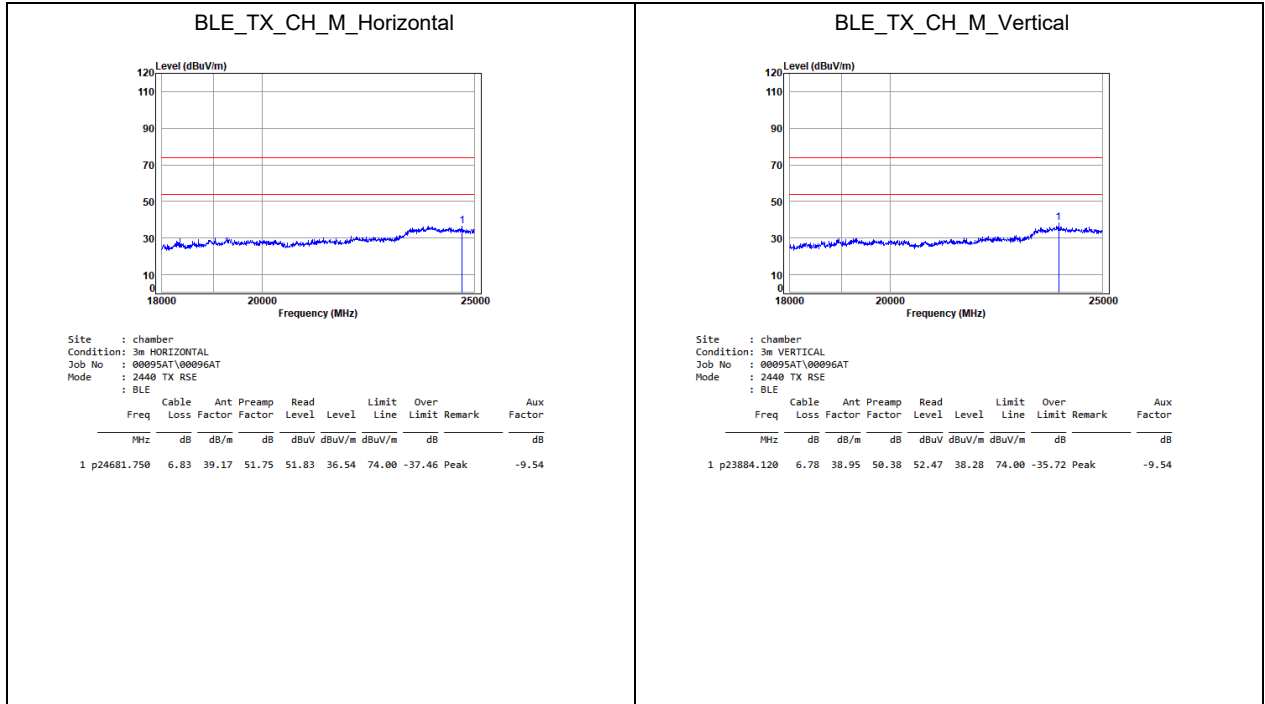

7.5 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
 Test Method: ANSI C63.10 (2020) Section 11.9.1
 Test Engineer: Mingli Hu

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.5.1 E.U.T. Operation

Operating Environment:


Temperature: 26.7 °C Humidity: 63.3 % RH Atmospheric Pressure: 1020 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	02	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.



7.5.3 Test Setup Diagram

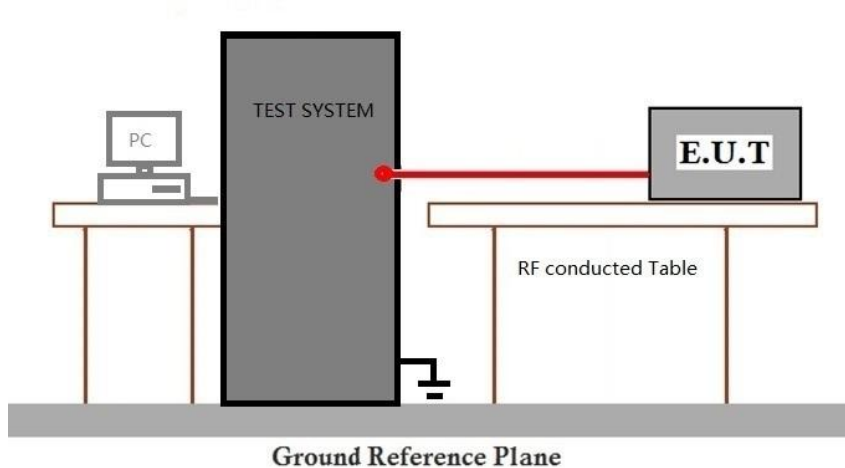

7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details



7.6 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2020) Section 11.8.1

Test Engineer: Mingli Hu

Limit:

≥500 kHz

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 26.7 °C


Humidity: 63.3 % RH

Atmospheric Pressure: 1020 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	02	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.6.3 Test Setup Diagram

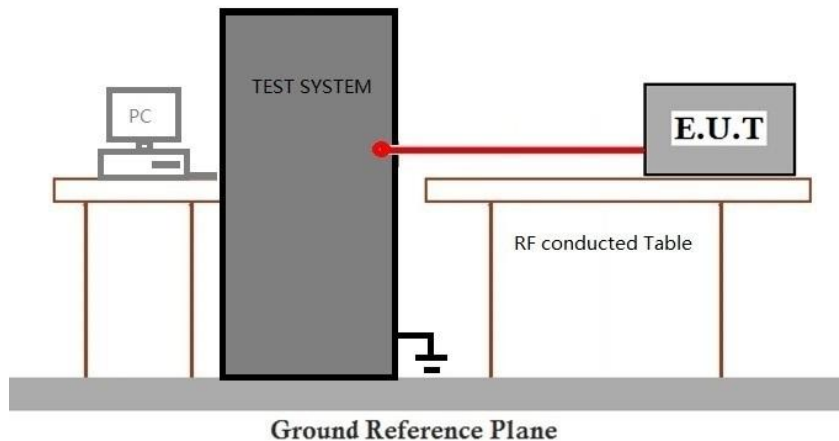

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.7 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2020) Section 11.10.2

Test Engineer: Mingli Hu

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 26.7 °C


Humidity: 63.3 % RH

Atmospheric Pressure: 1020 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	02	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.7.3 Test Setup Diagram

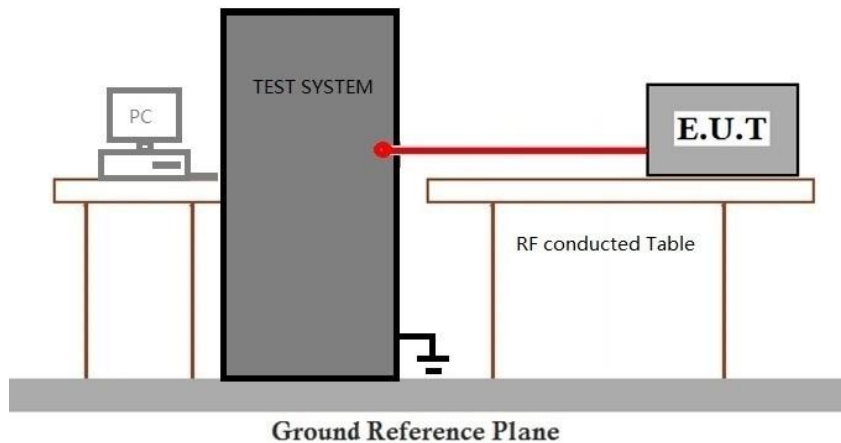

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.8 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10 (2020) Section 6.10.4
 Test Engineer: Mingli Hu

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation

Operating Environment:


Temperature: 26.7 °C Humidity: 63.3 % RH Atmospheric Pressure: 1020 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	02	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.



7.8.3 Test Setup Diagram

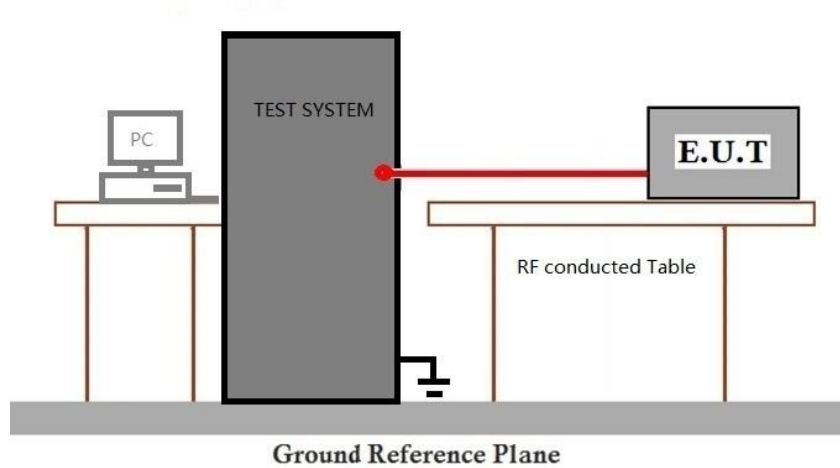

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.9 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10 (2020) Section 11.11
 Test Engineer: Mingli Hu

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.1 E.U.T. Operation

Operating Environment:


Temperature: 26.7 °C Humidity: 63.3 % RH Atmospheric Pressure: 1020 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	02	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.



7.9.3 Test Setup Diagram

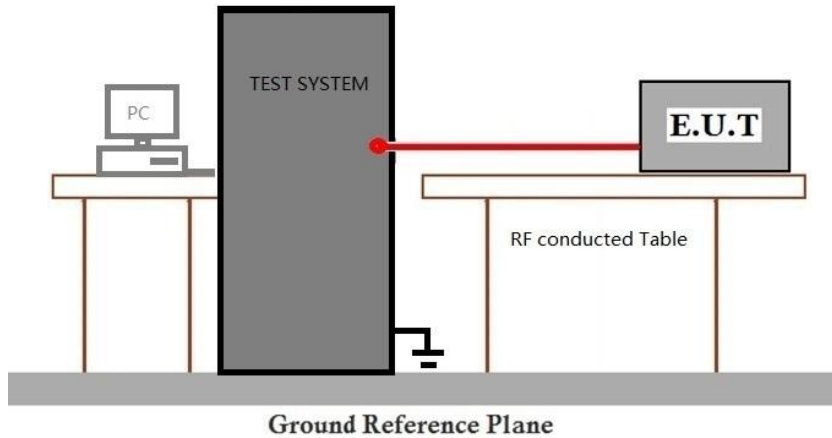

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SZCR2601000095AT

9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for SZCR2601000095AT



10 Appendix

1. Duty Cycle

1.1 Test Result


1.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.301	0.705	42.70	3.70	0.07
		2440	0.301	0.705	42.70	3.70	0.01
		2480	0.301	0.706	42.63	3.70	0.05
2M	SISO	2402	0.155	0.705	21.99	6.58	0.03
		2440	0.155	0.705	21.99	6.58	0.03
		2480	0.155	0.705	21.99	6.58	0.03




1.2 Test Graph


1.2.1 Ant1

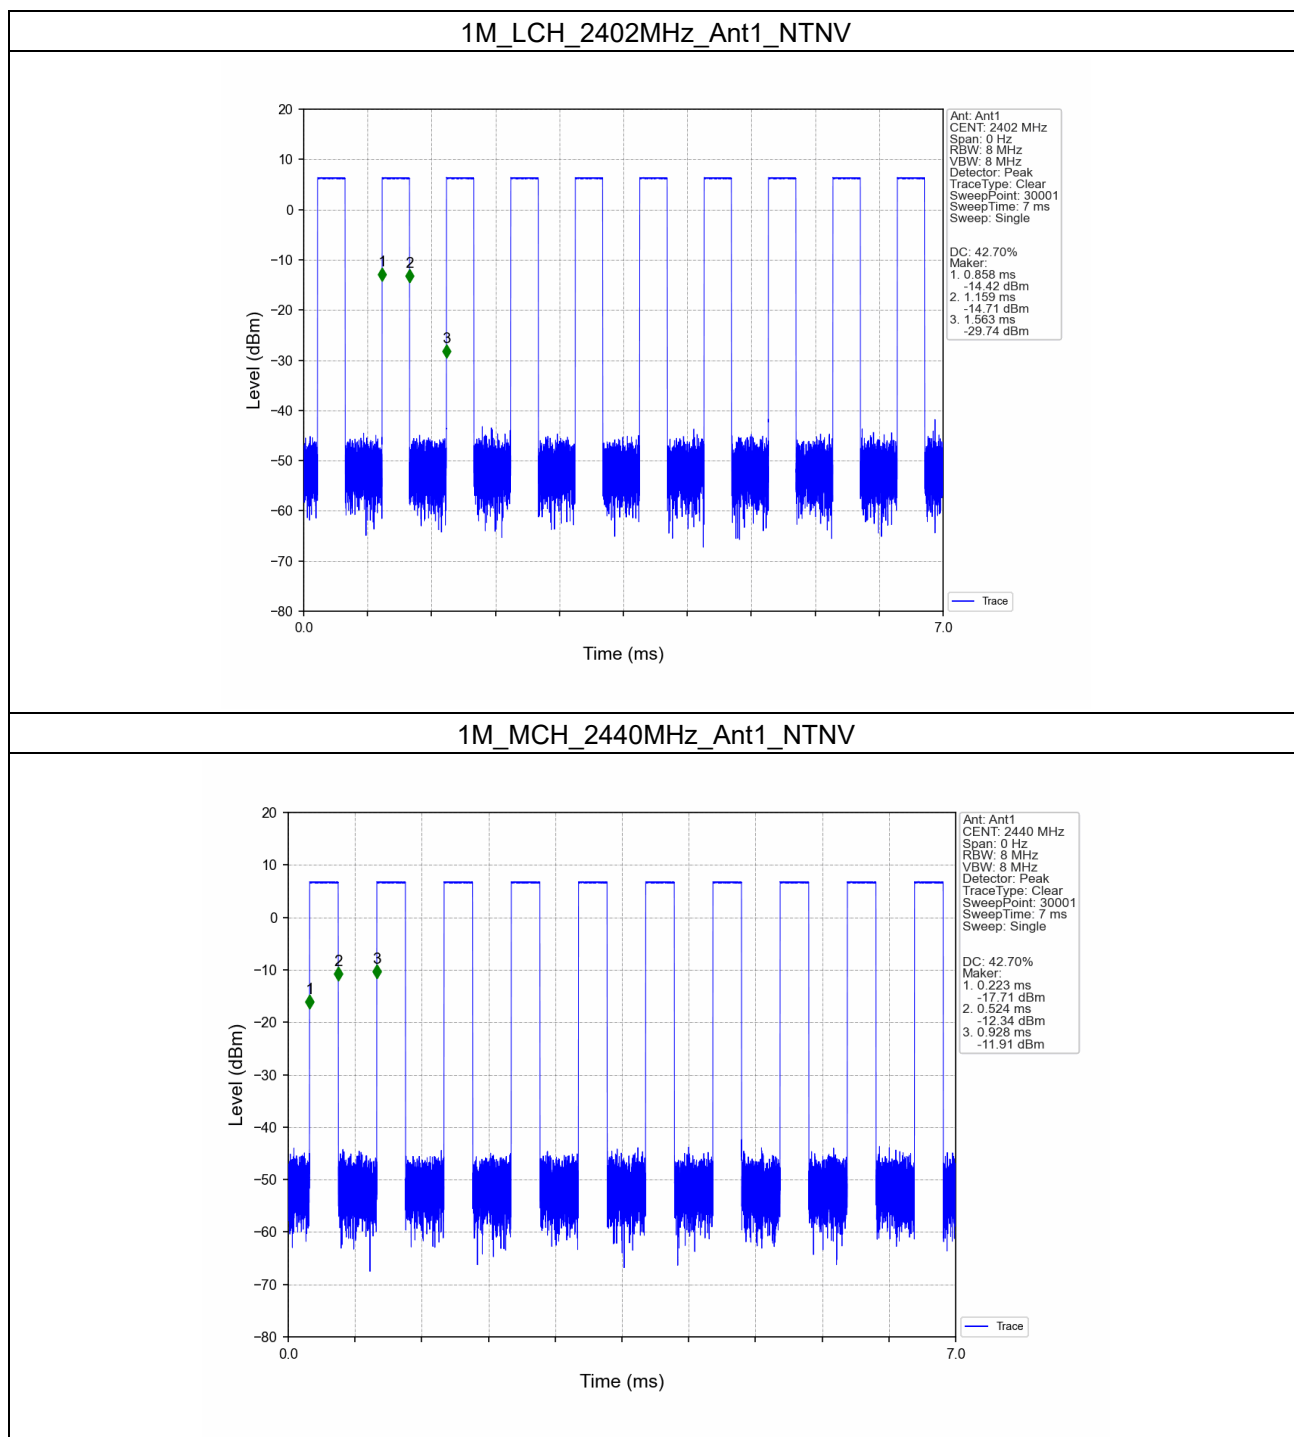


1M_HCH_2480MHz_Ant1_NTNV

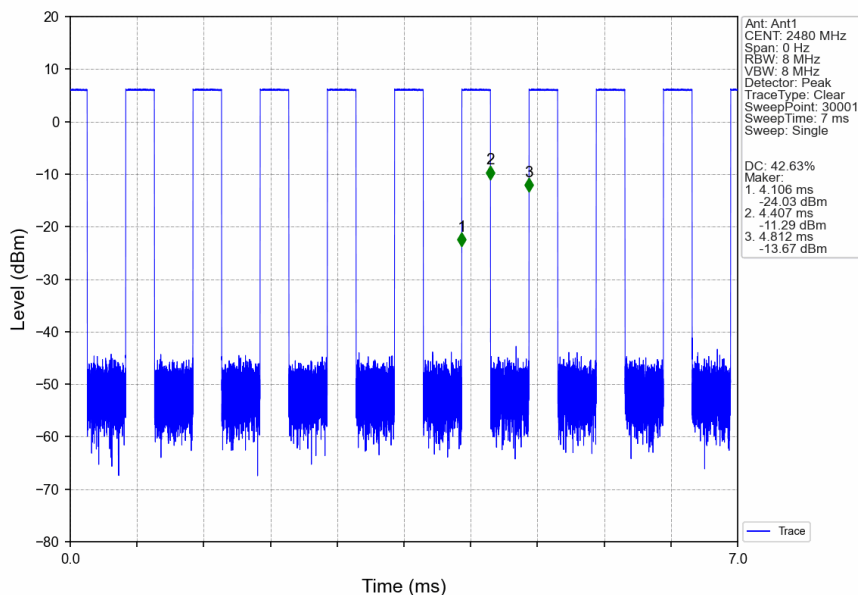


2M_LCH_2402MHz_Ant1_NTNV

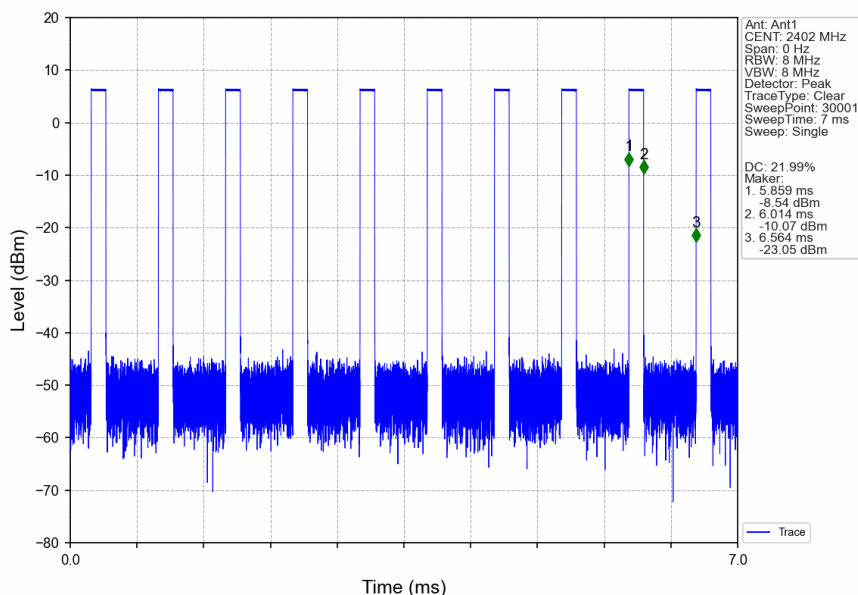

2M_MCH_2440MHz_Ant1_NTNV

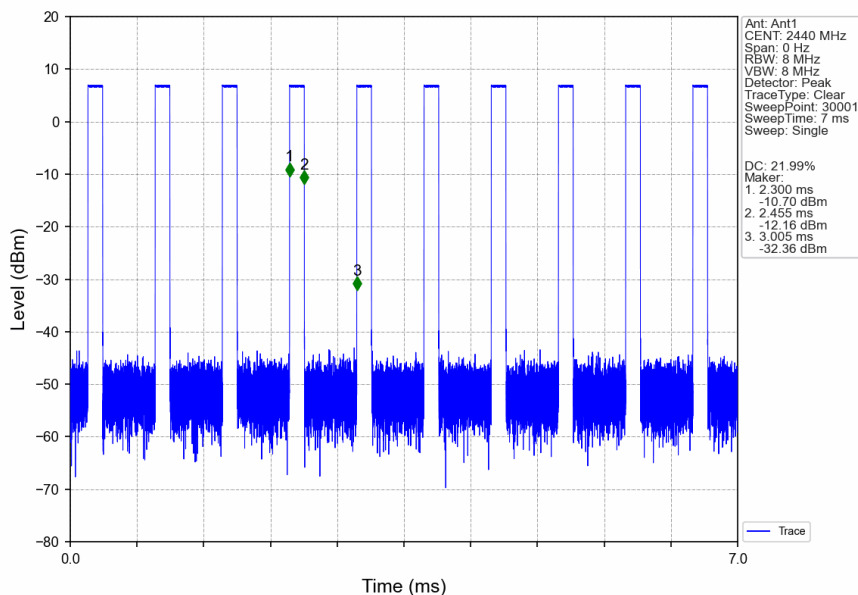

2M_HCH_2480MHz_Ant1_NTNV

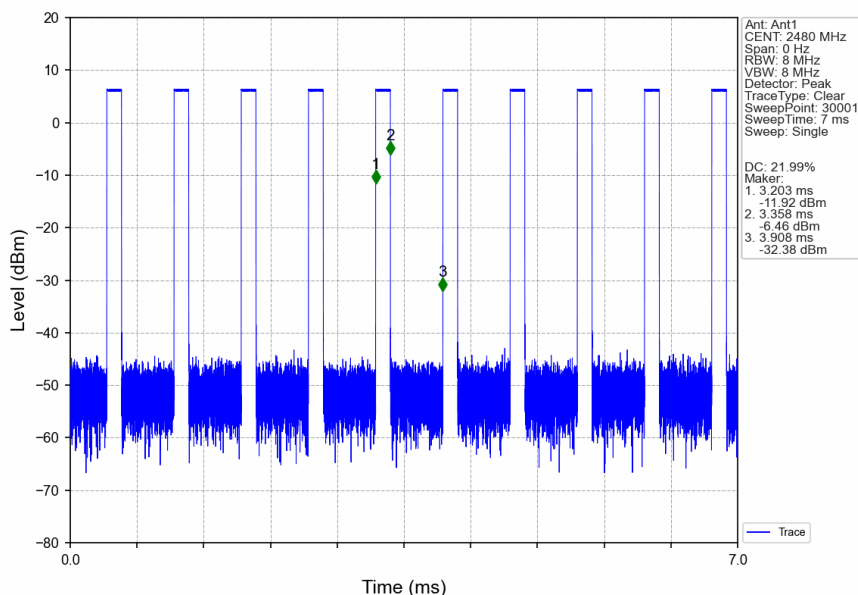

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.027	/	Pass
		2440	1	1.028	/	Pass
		2480	1	1.027	/	Pass
2M	SISO	2402	1	2.047	/	Pass
		2440	1	2.049	/	Pass
		2480	1	2.049	/	Pass


2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.710	≥ 0.5	Pass
		2440	1	0.708	≥ 0.5	Pass
		2480	1	0.708	≥ 0.5	Pass
2M	SISO	2402	1	1.252	≥ 0.5	Pass
		2440	1	1.252	≥ 0.5	Pass
		2480	1	1.252	≥ 0.5	Pass



2.2 Test Graph

2.2.1 OBW

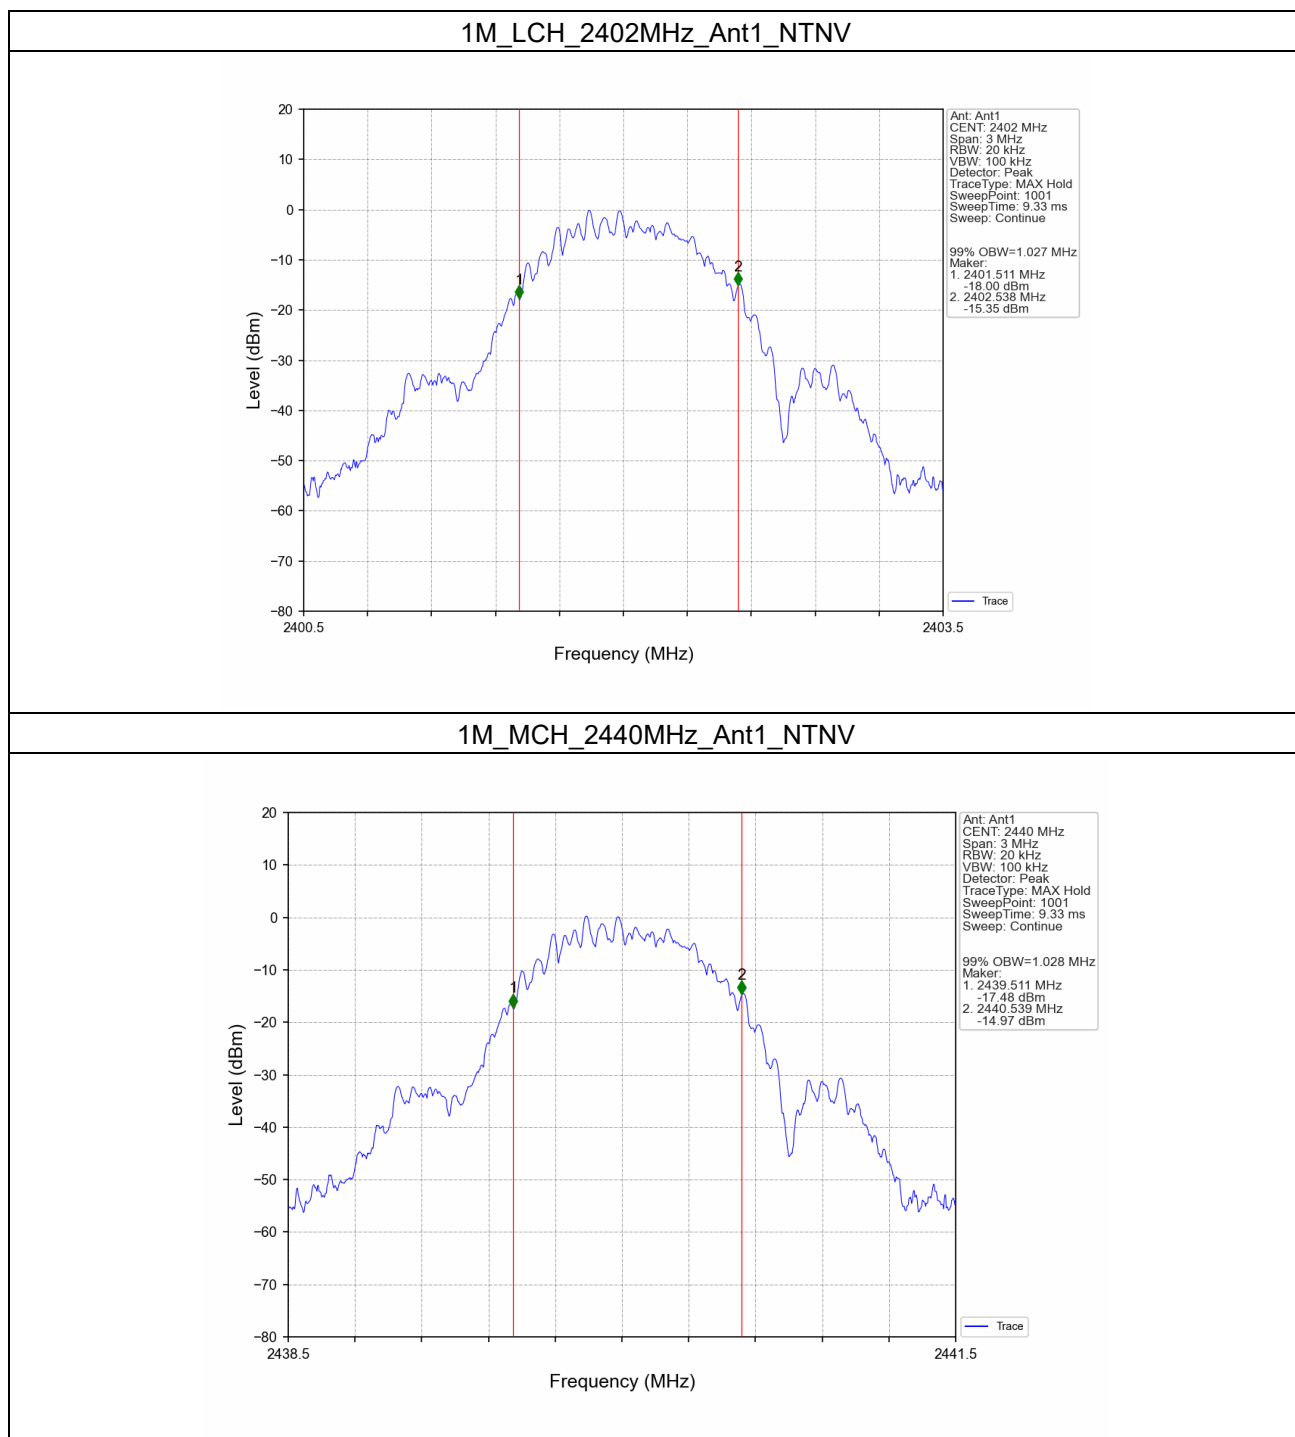


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


1M_HCH_2480MHz_Ant1_NTNV

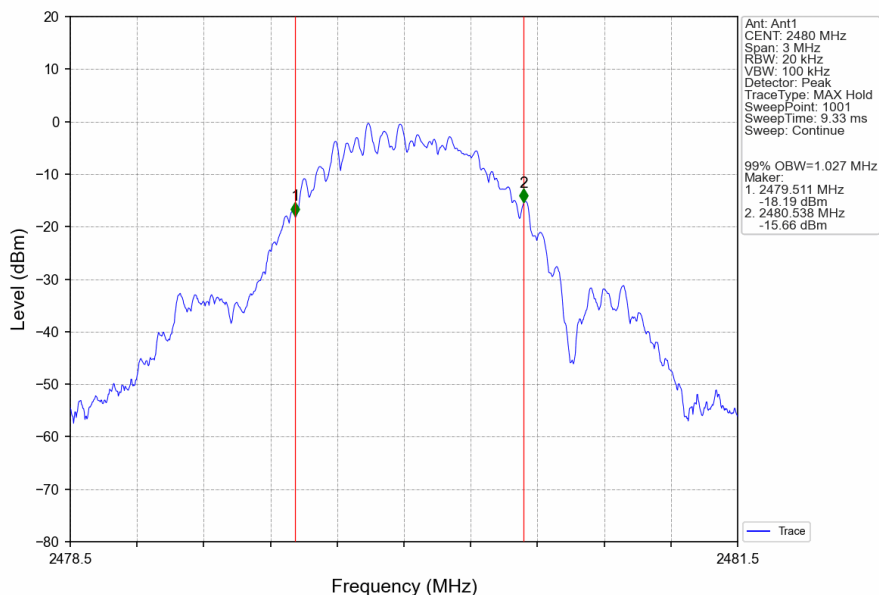


2M_LCH_2402MHz_Ant1_NTNV

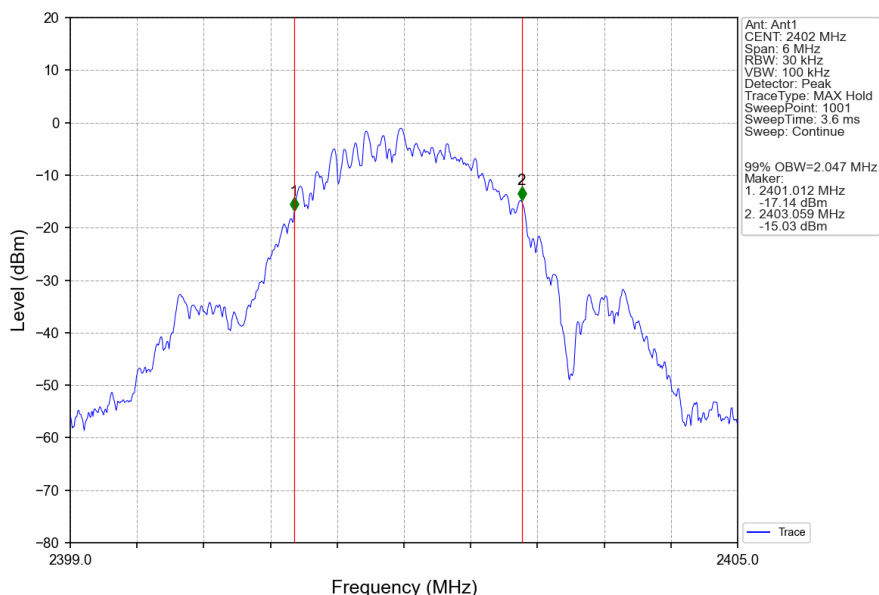


2M_MCH_2440MHz_Ant1_NTNV

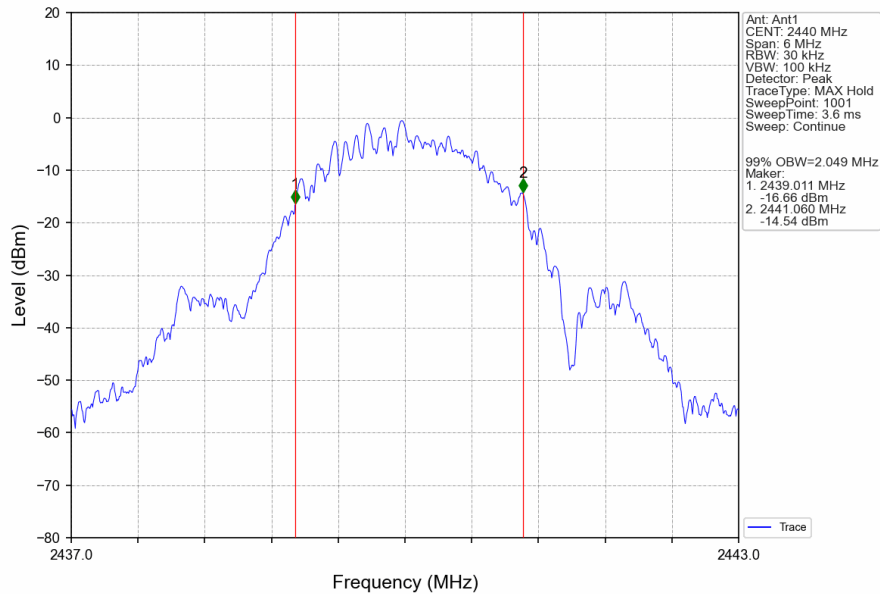


2M_HCH_2480MHz_Ant1_NTNV

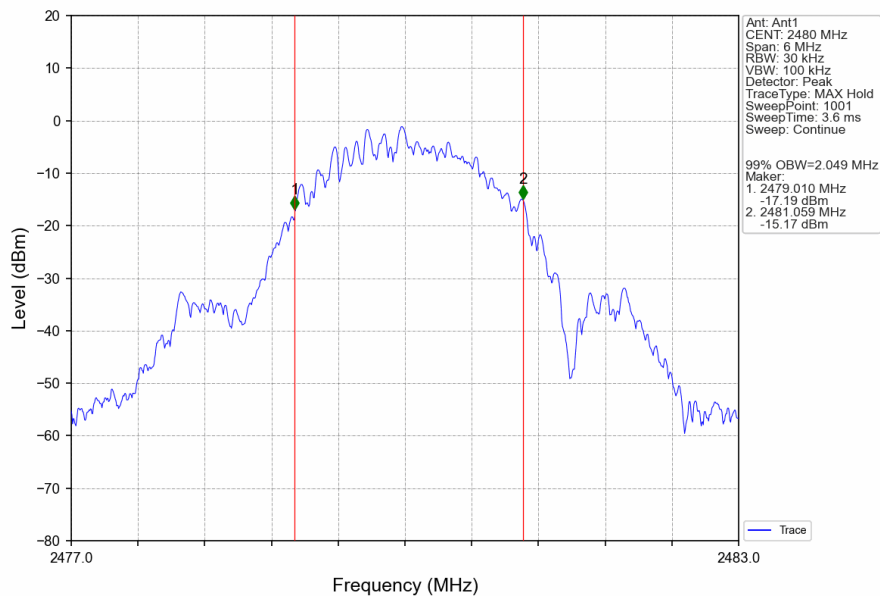


2.2.2 6dB BW

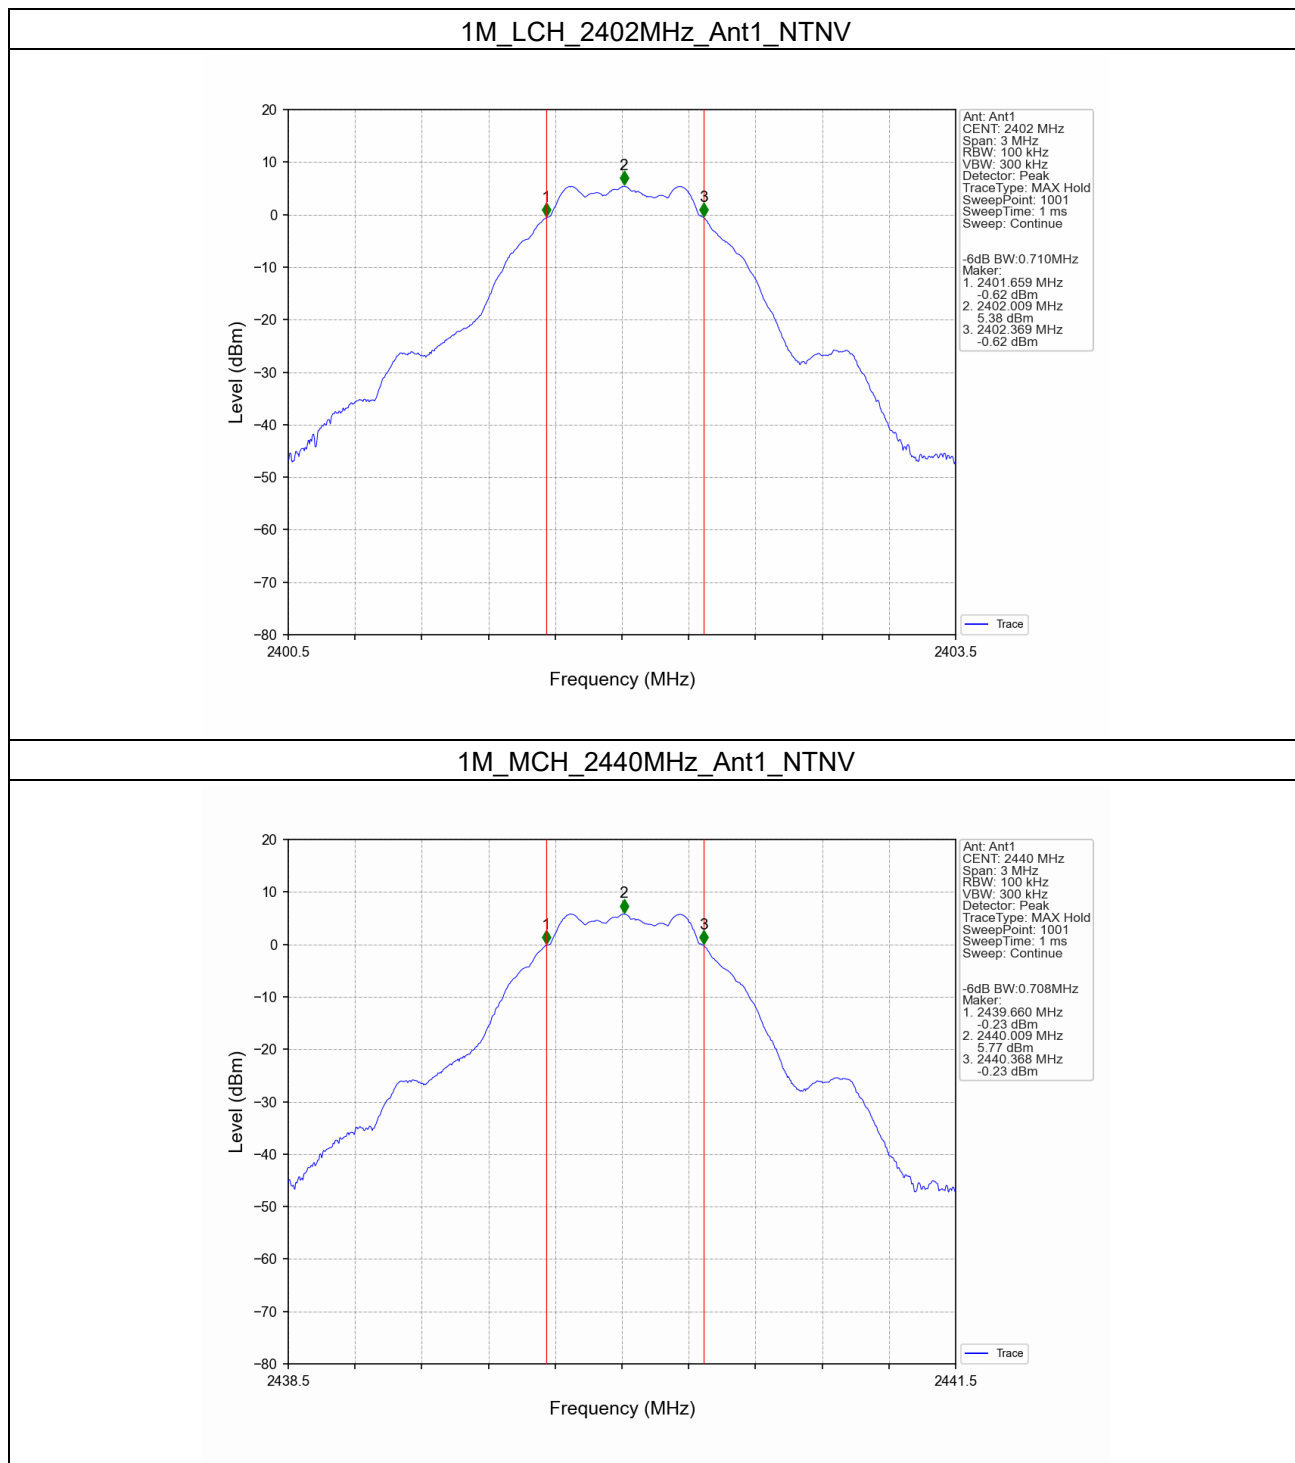


1M_HCH_2480MHz_Ant1_NTNV

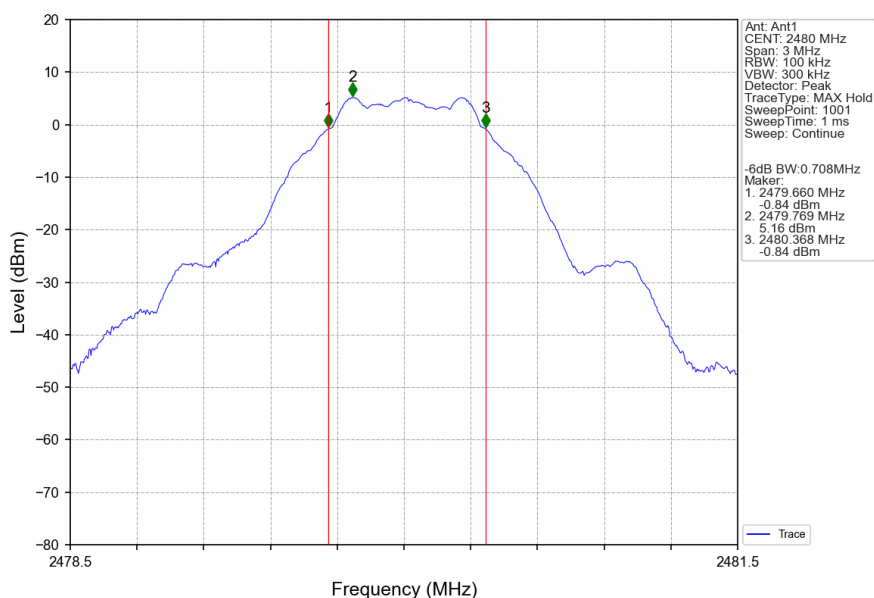


2M_LCH_2402MHz_Ant1_NTNV

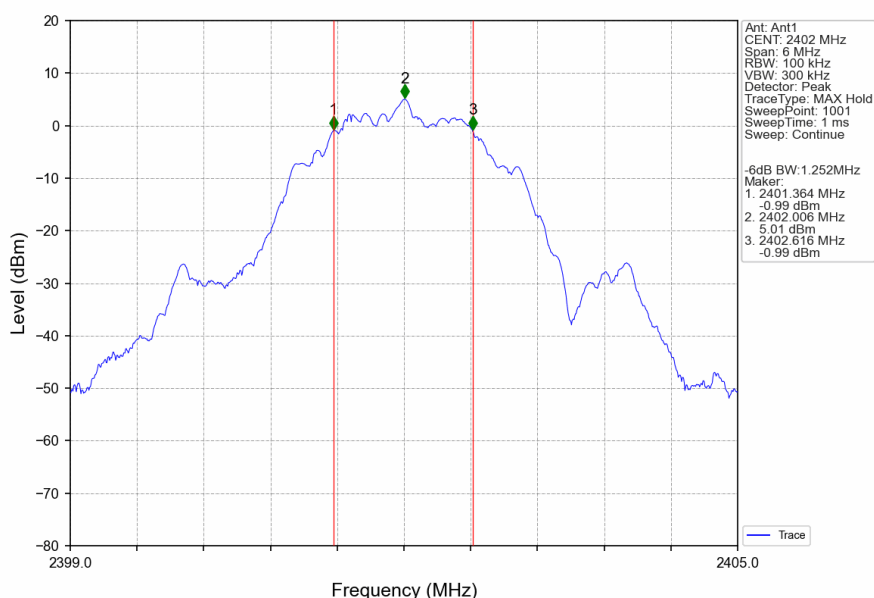

2M_MCH_2440MHz_Ant1_NTNV

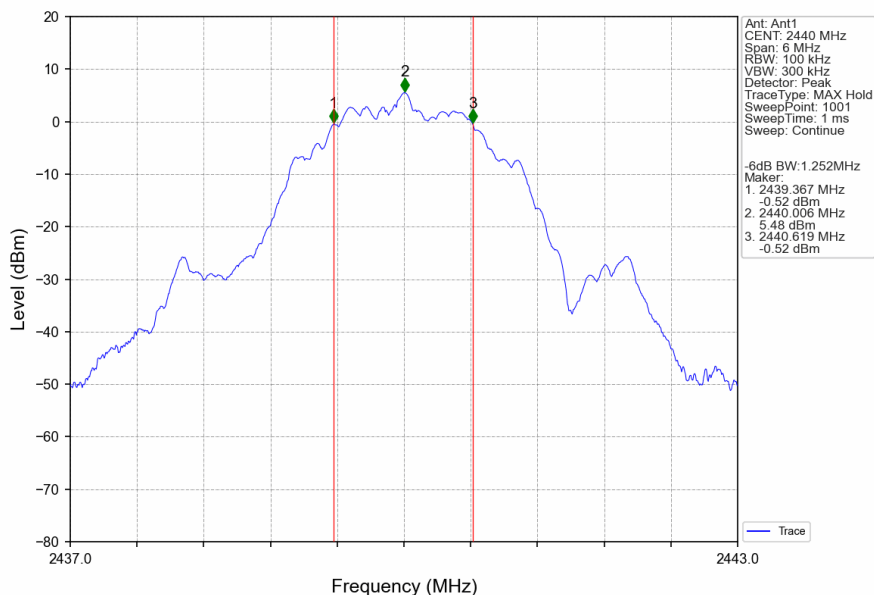

2M_HCH_2480MHz_Ant1_NTNV

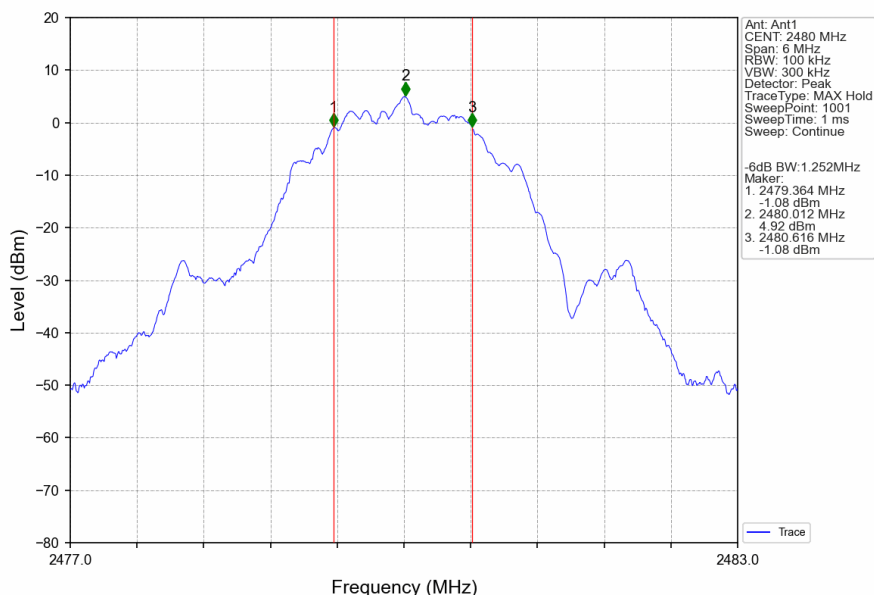

3. Maximum Conducted Output Power

3.1 Test Result

3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	6.32	<=30	Pass
		2440	6.70	<=30	Pass
		2480	6.09	<=30	Pass
2M	SISO	2402	6.37	<=30	Pass
		2440	6.89	<=30	Pass
		2480	6.30	<=30	Pass

4. Maximum Power Spectral Density

4.1 Test Result

4.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	5.38	<=8	Pass
		2440	5.76	<=8	Pass
		2480	5.14	<=8	Pass
2M	SISO	2402	4.99	<=8	Pass
		2440	5.50	<=8	Pass
		2480	4.93	<=8	Pass




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4.2 Test Graph


4.2.1 PSD

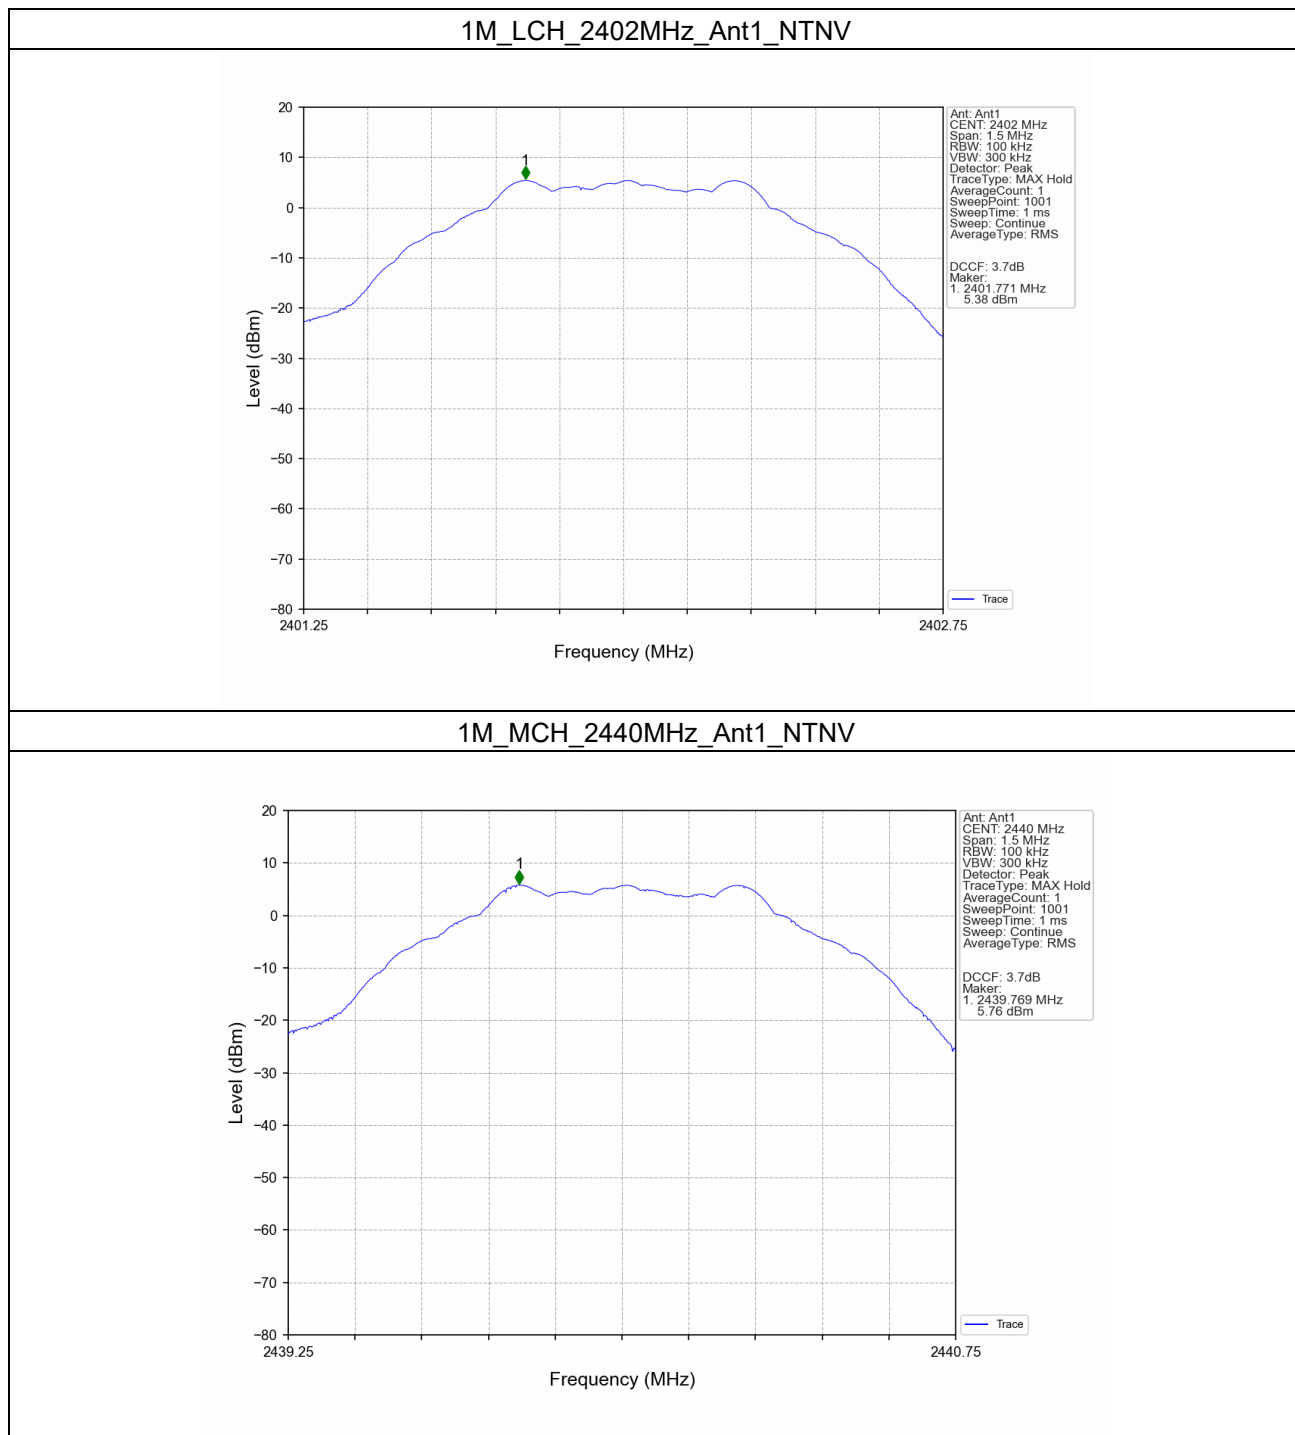


1M_HCH_2480MHz_Ant1_NTNV

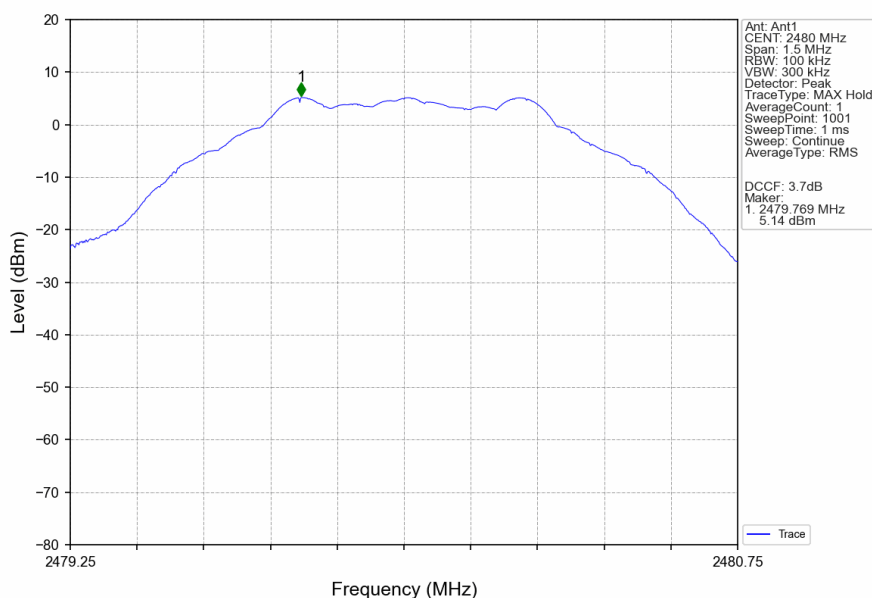


2M_LCH_2402MHz_Ant1_NTNV

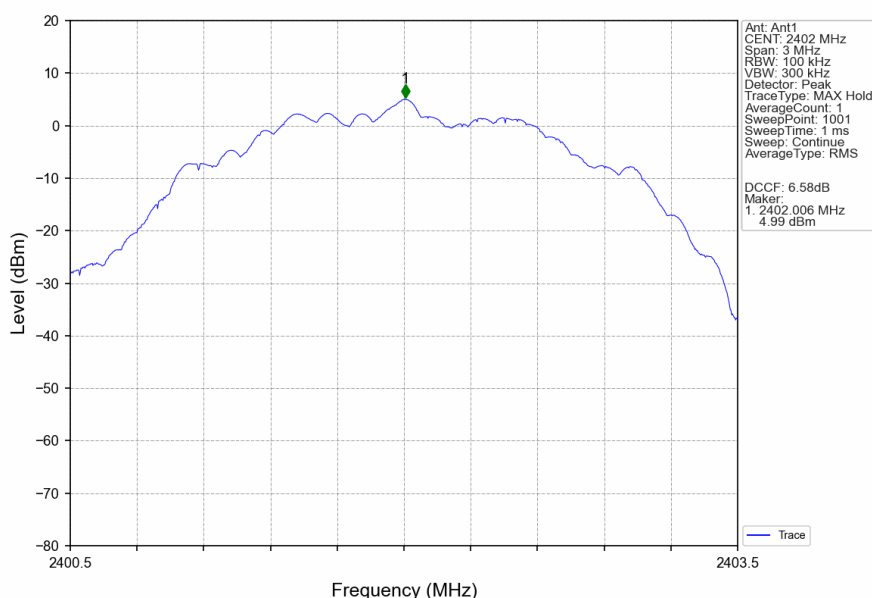

2M_MCH_2440MHz_Ant1_NTNV

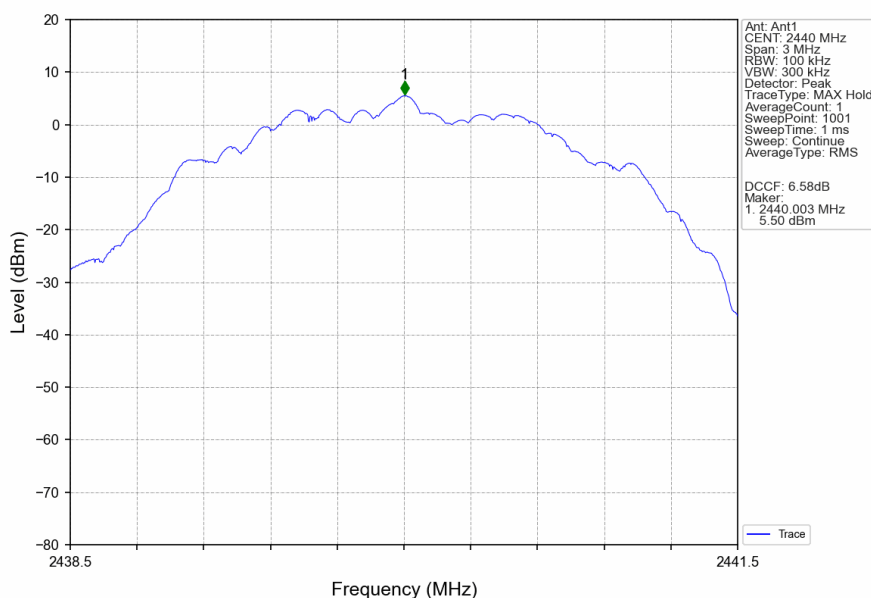

2M_HCH_2480MHz_Ant1_NTNV

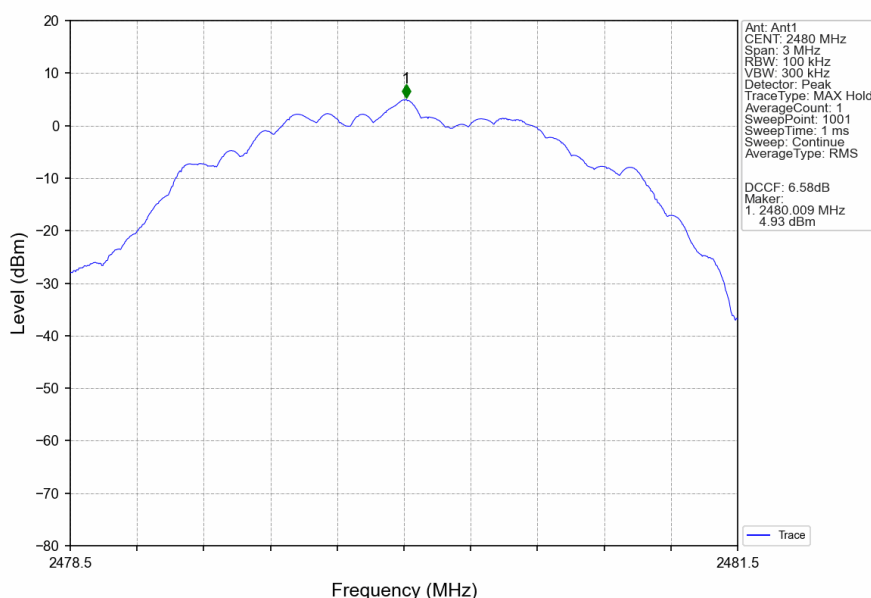

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	5.37
		2440	1	5.76
		2480	1	5.15
2M	SISO	2402	1	5.01
		2440	1	5.50
		2480	1	4.94

5.1.2 CSE


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	5.76	-14.24	Pass
		2440	1	5.76	-14.24	Pass
		2480	1	5.76	-14.24	Pass
2M	SISO	2402	1	5.50	-14.50	Pass
		2440	1	5.50	-14.50	Pass
		2480	1	5.50	-14.50	Pass

5.2 Test Graph


5.2.1 Ref

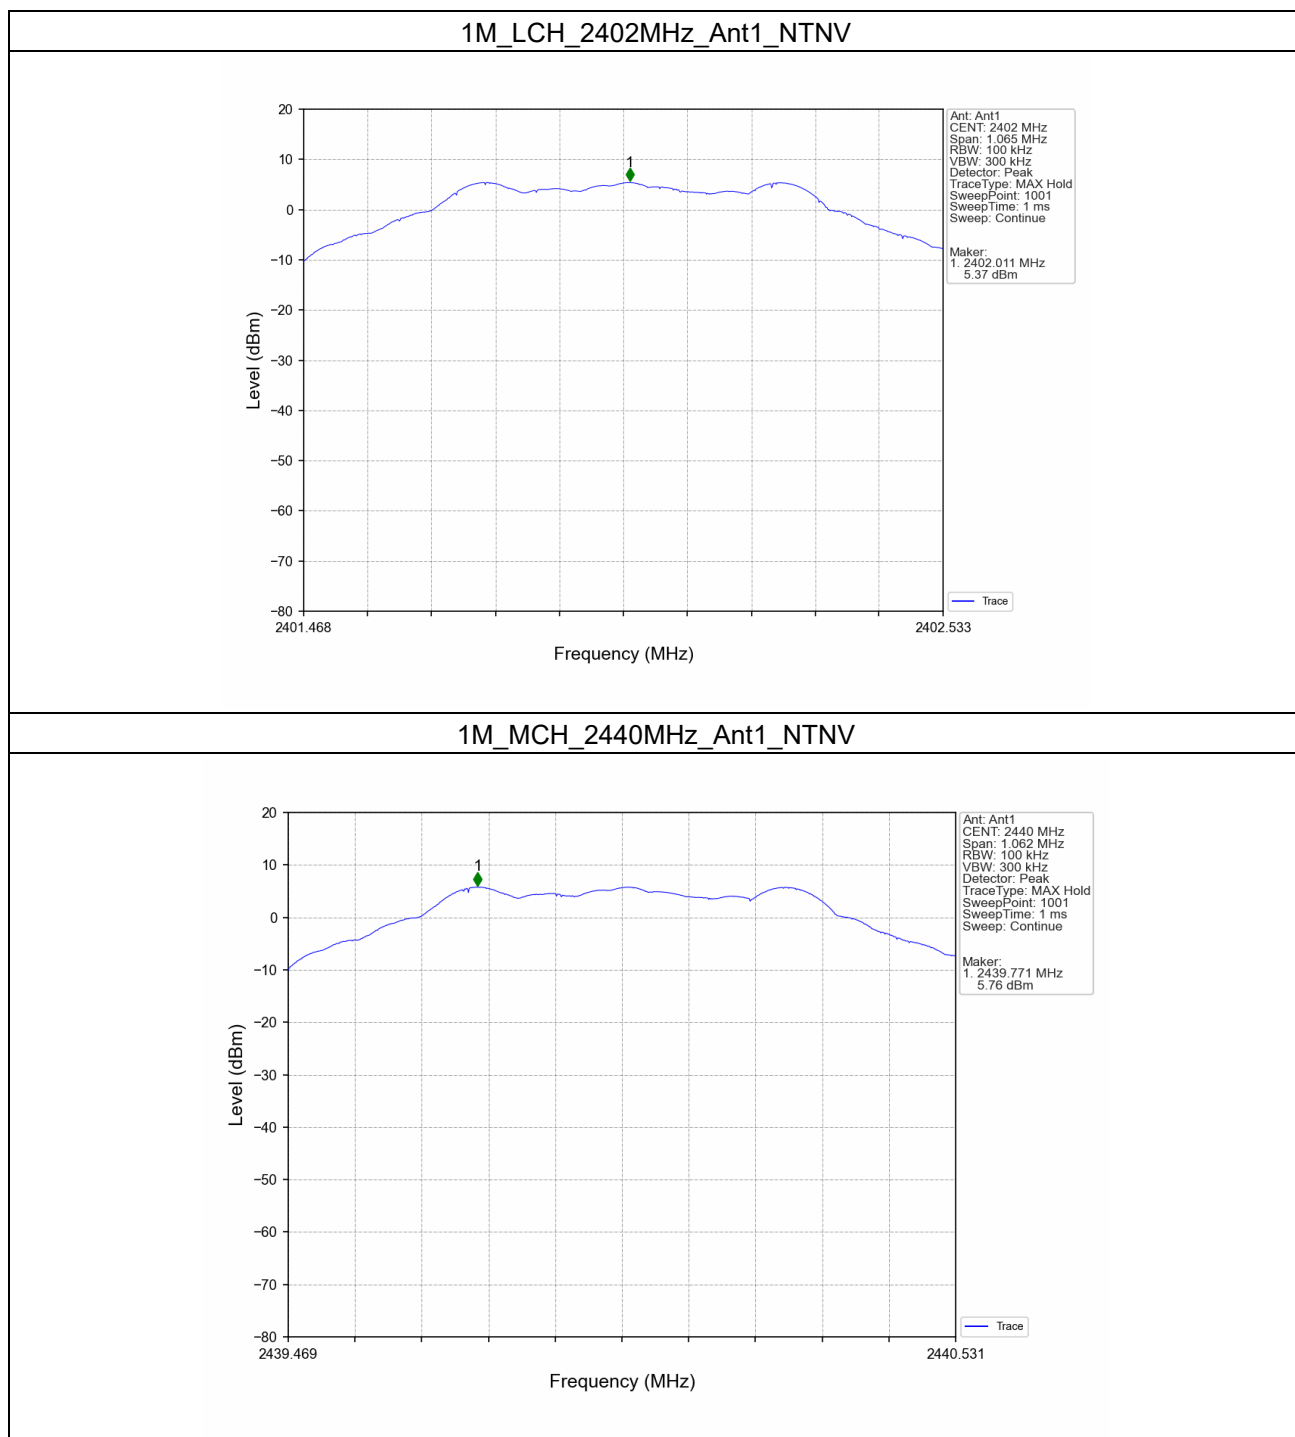


1M_HCH_2480MHz_Ant1_NTNV

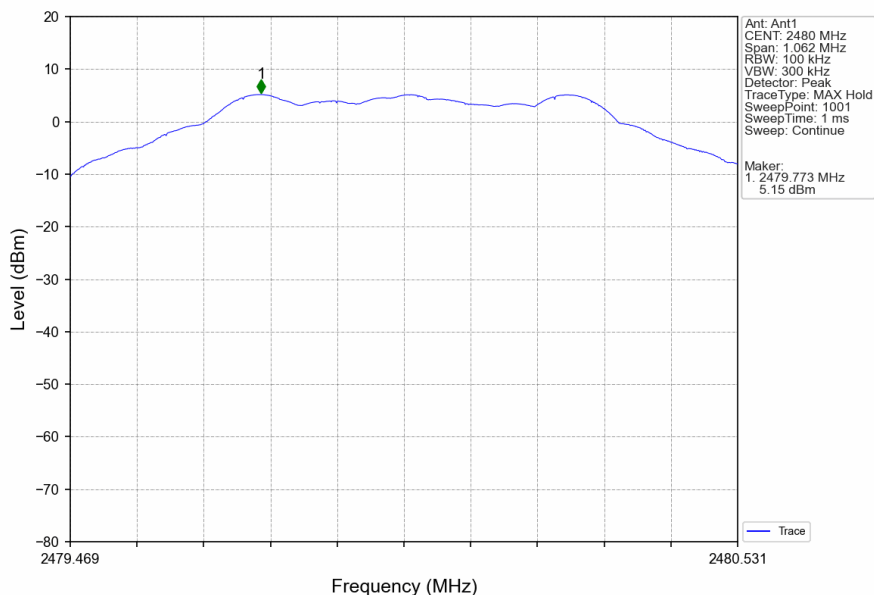


2M_LCH_2402MHz_Ant1_NTNV

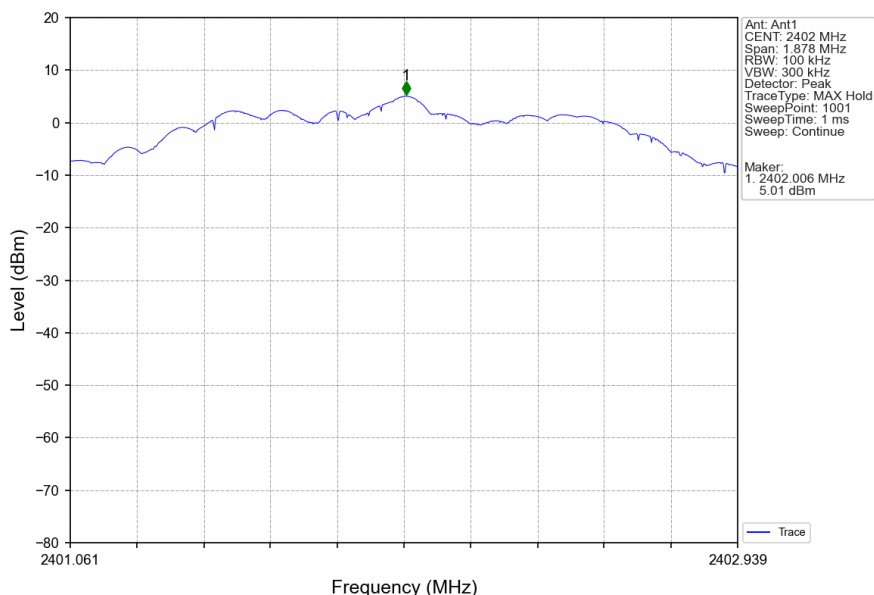


2M_MCH_2440MHz_Ant1_NTNV

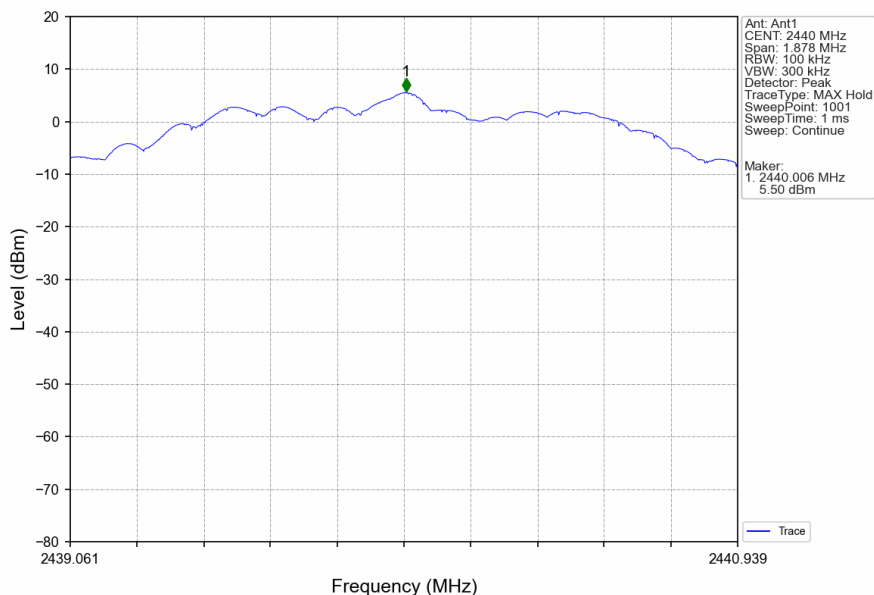

2M_HCH_2480MHz_Ant1_NTNV

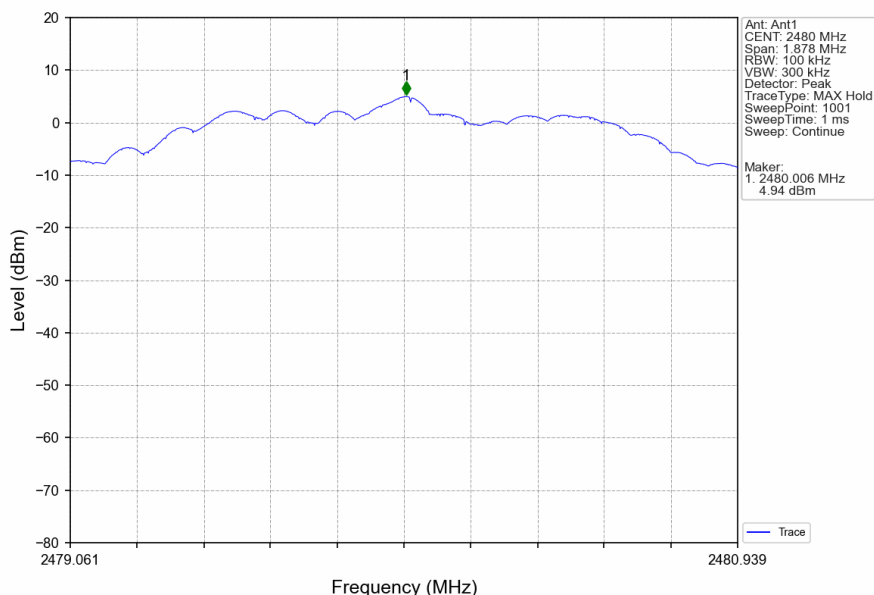


5.2.2 CSE

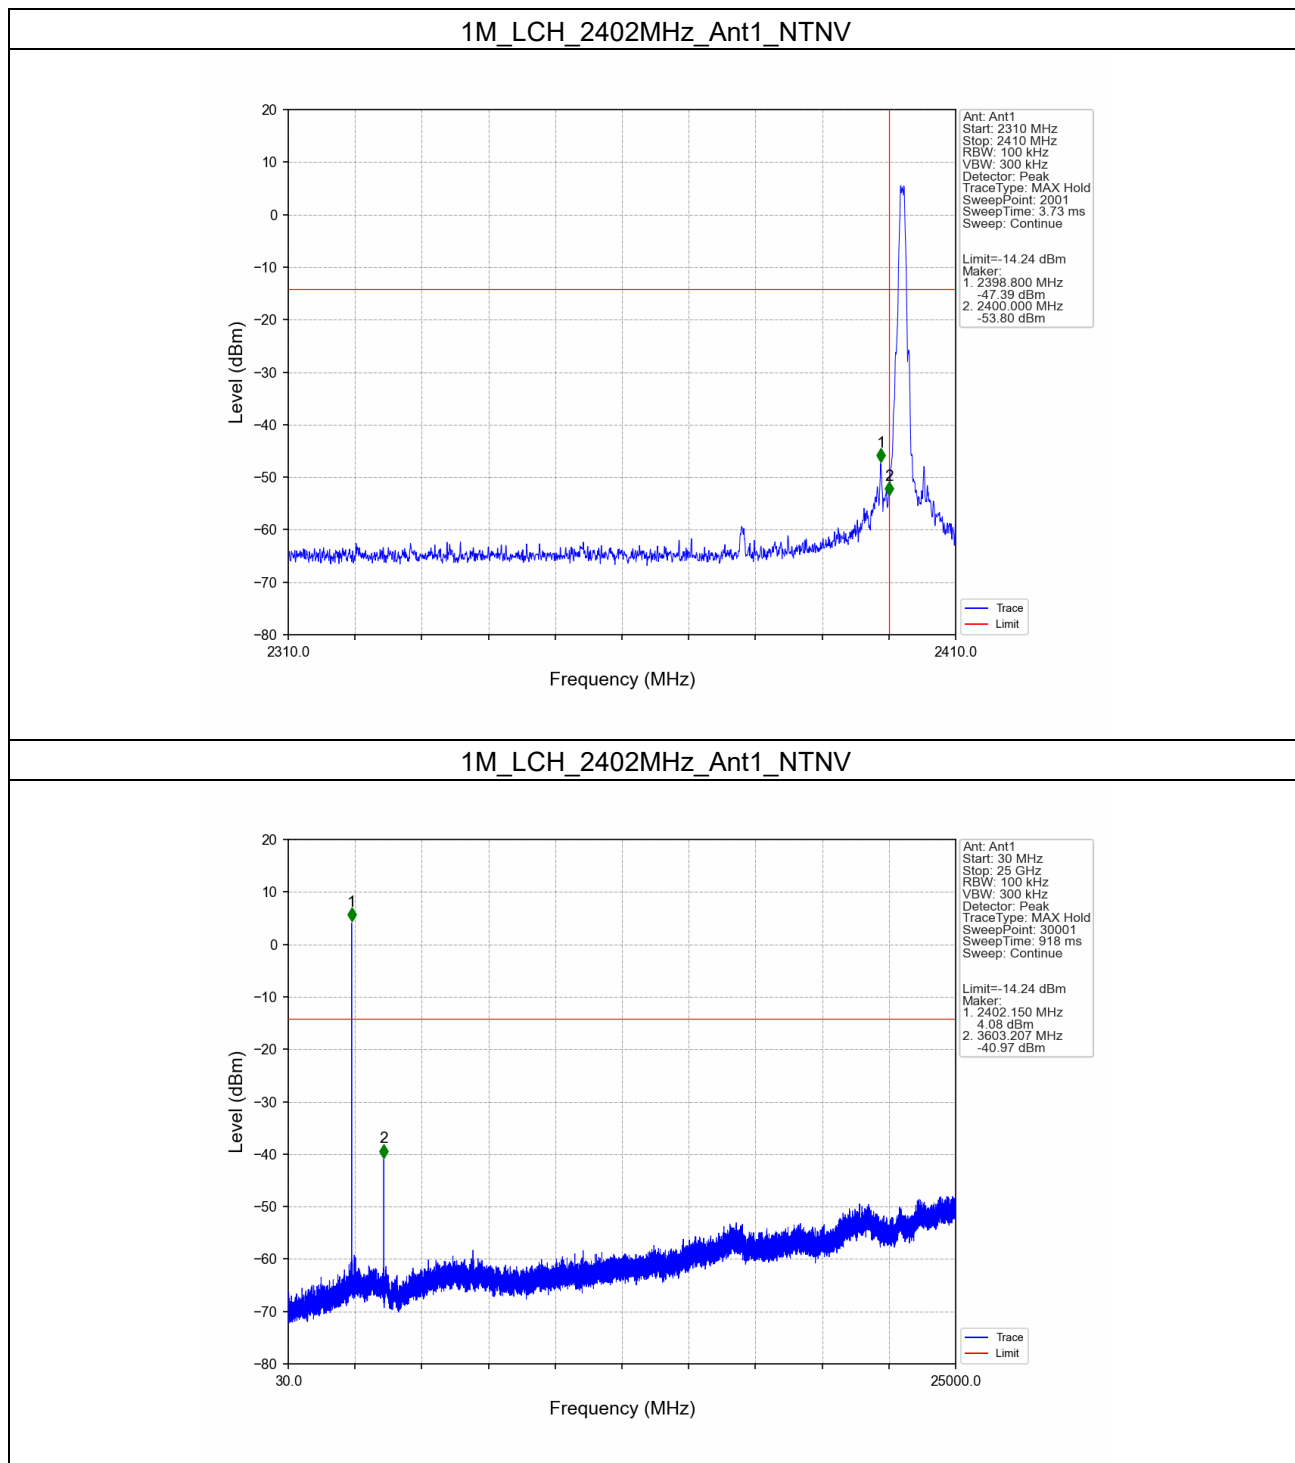


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


1M_MCH_2440MHz_Ant1_NTNV

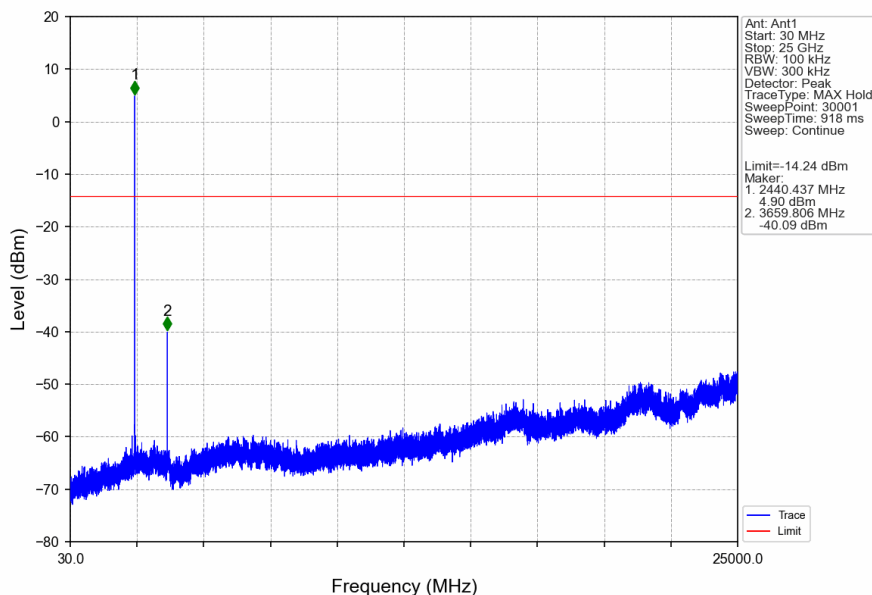


1M_HCH_2480MHz_Ant1_NTNV

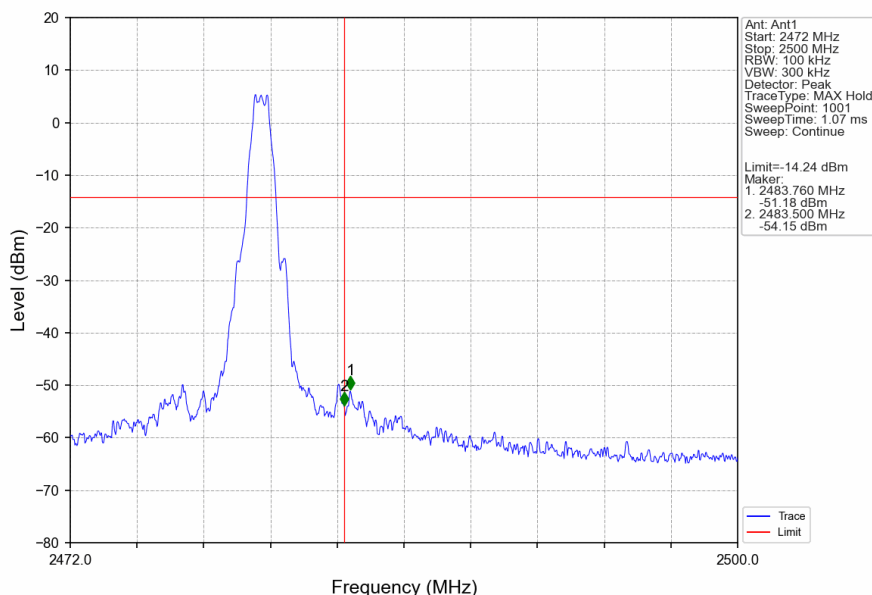


1M_HCH_2480MHz_Ant1_NTNV

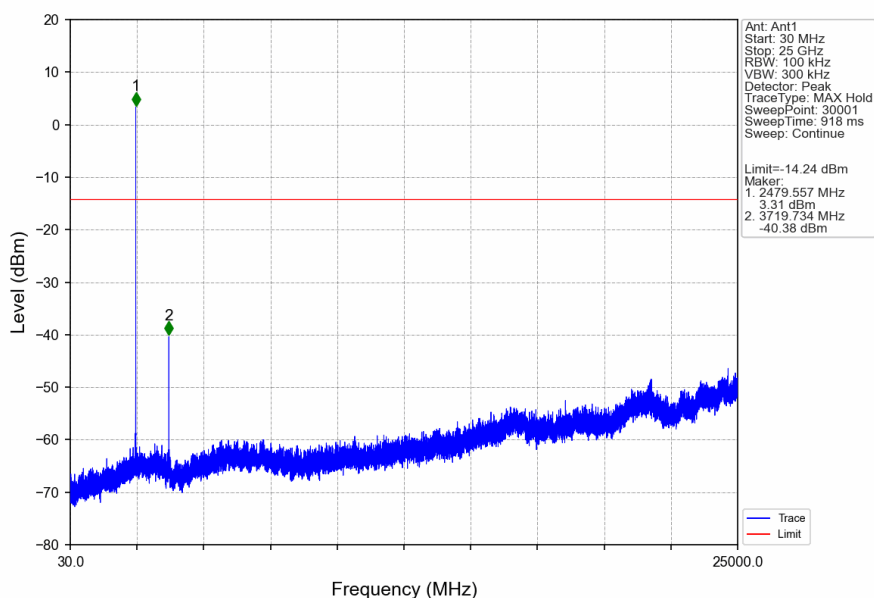


2M_LCH_2402MHz_Ant1_NTNV

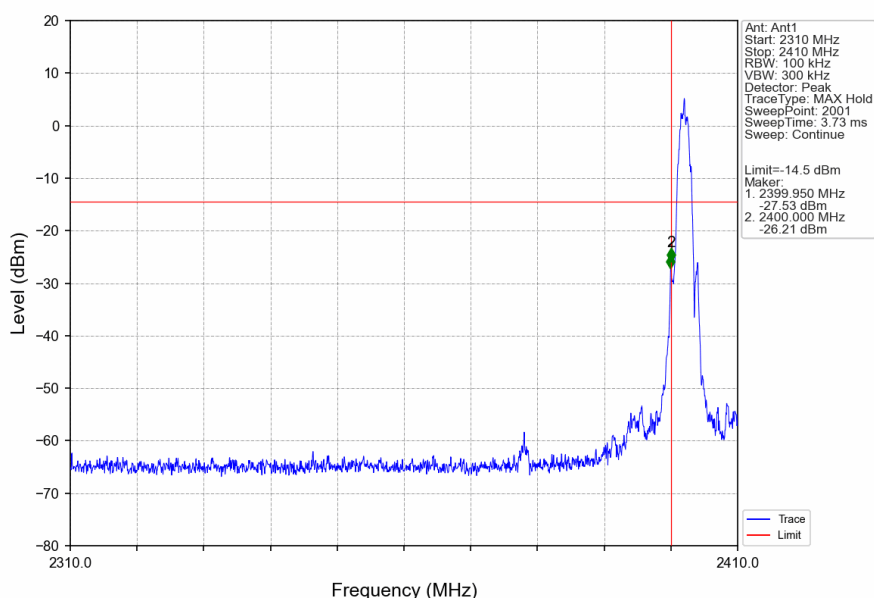


2M_LCH_2402MHz_Ant1_NTNV

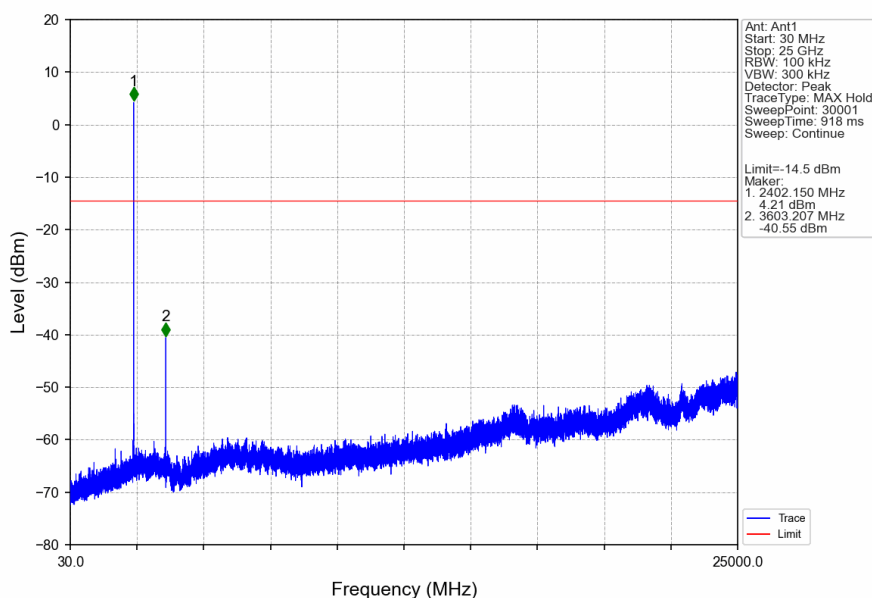


2M_MCH_2440MHz_Ant1_NTNV

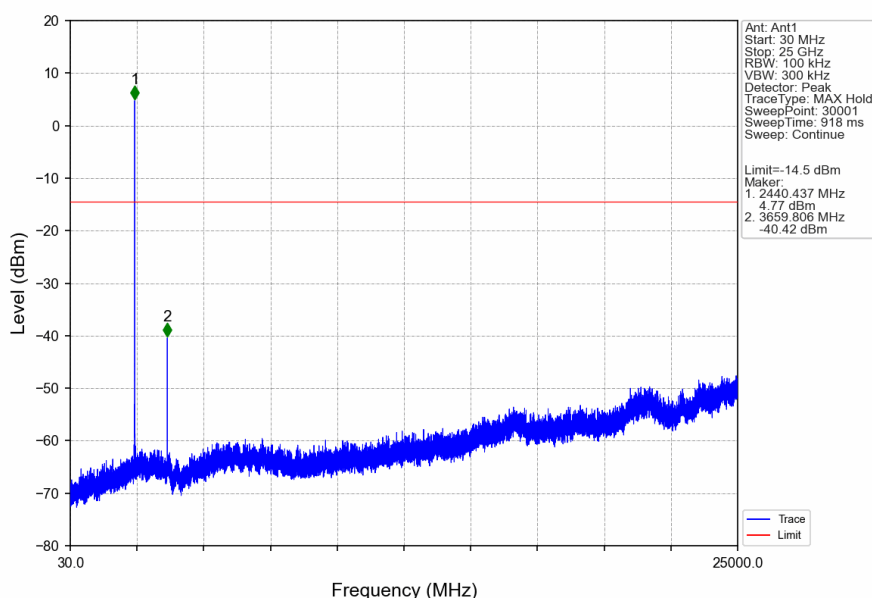

2M_HCH_2480MHz_Ant1_NTNV

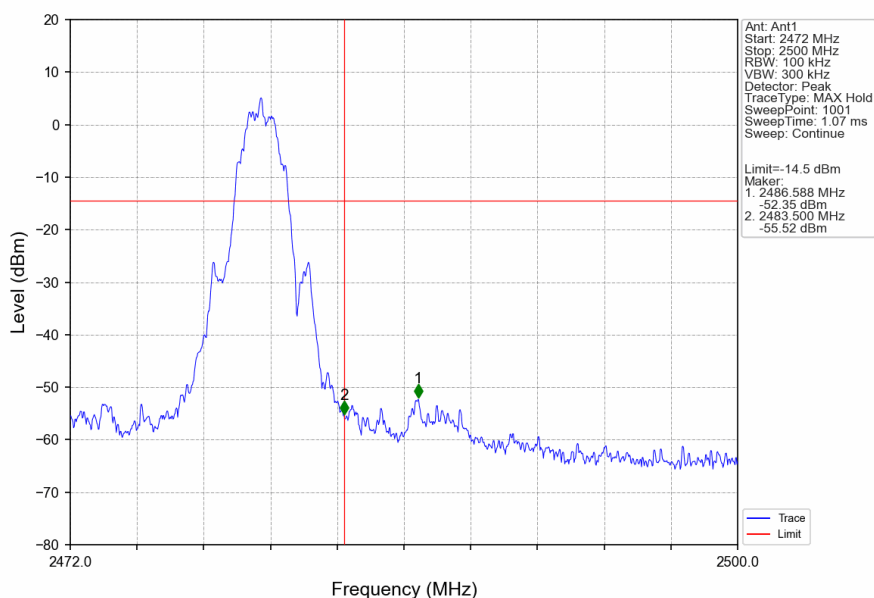

2M_HCH_2480MHz_Ant1_NTNV

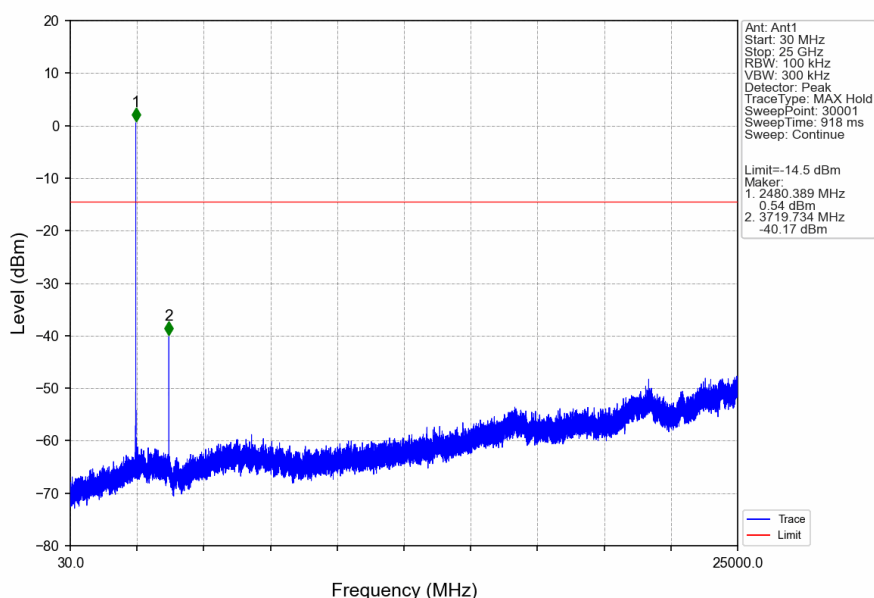

- End of the Report -

