



SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

EMC-TRF-01 Rev 2.1

Report No.: GZCR260200037702

Page: 1 of 87

FCC ID: 2AXP2-DK37

TEST REPORT

Application No.: GZCR2602000377AT
Applicant: GLORIOUS LLC
Address of Applicant: 13809 RESEARCH BLVD SUITE 500 PMB 93206 AUSTIN, TX 78750, United States
Manufacturer: GLORIOUS LLC
Address of Manufacturer: 13809 RESEARCH BLVD SUITE 500 PMB 93206 AUSTIN, TX 78750, United States
Factory: RISUNTEK VIETNAM CO., LTD
Address of Factory: Lot CN 04, Dong Van IV Industrial Park, Kim Thanh Ward, Ninh Binh Province, Vietnam
Product Name: GHS WIRELESS INFINITEPLAY RECEIVER
Model No.: GHS WIRELESS INFINITEPLAY RECEIVER
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2026-02-13
Date of Test: 2026-03-12 to 2026-04-08
Date of Issue: 2026-05-09

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663 t (86-20) 82155555 www.sgs.com.cn
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

Revision Record			
Version	Report No.	Date	Remark
01	GZCR260200037702	2026-05-09	Original

Authorized for issue by:			
		Luke Lin	
		Luke Lin/Project Engineer	
Approved By		Vico Cui	
		Vico Cui/Reviewer	



2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence		N/A	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2020) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5 & 7.8.8	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2020) Section 6.6 & 7.8.8	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Maximum Conducted Output Power		ANSI C63.10 (2020) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass
20dB Bandwidth		ANSI C63.10 (2020) Section 6.9.2	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Carrier Frequencies Separation		ANSI C63.10 (2020) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
Hopping Channel Number		ANSI C63.10 (2020) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Dwell Time		ANSI C63.10 (2020) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2020) Section 7.8.7.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2020) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(d)	Pass

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Competency Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编:510663

t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty	7
4.4 Test Location	7
4.5 Test Facility	8
4.6 Deviation from Standards	9
4.7 Abnormalities from Standard Conditions	9
5 Equipment List	10
6 Radio Spectrum Technical Requirement	12
6.1 Antenna Requirement	12
6.1.1 Test Requirement:	12
6.1.2 Conclusion	12
6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	13
6.2.1 Test Requirement:	13
6.2.2 Conclusion	13
7 Radio Spectrum Matter Test Results	14
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	14
7.1.1 E.U.T. Operation	14
7.1.2 Test Mode Description	14
7.1.3 Test Setup Diagram	15
7.1.4 Measurement Procedure and Data	15
7.2 Radiated Emissions which fall in the restricted bands	18
7.2.1 E.U.T. Operation	18
7.2.2 Test Mode Description	18
7.2.3 Test Setup Diagram	18
7.2.4 Measurement Procedure and Data	19
7.3 Radiated Spurious Emissions Below 1GHz	24
7.3.1 E.U.T. Operation	25
7.3.2 Test Mode Description	25
7.3.3 Test Setup Diagram	25
7.3.4 Measurement Procedure and Data	26
7.4 Radiated Spurious Emissions Above 1GHz	29
7.4.1 E.U.T. Operation	29
7.4.2 Test Mode Description	29
7.4.3 Test Setup Diagram	29
7.4.4 Measurement Procedure and Data	30
7.5 Maximum Conducted Output Power	39



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.5.1	E.U.T. Operation	39
7.5.2	Test Mode Description	39
7.5.3	Test Setup Diagram	40
7.5.4	Measurement Procedure and Data	40
7.6	20dB Bandwidth	41
7.6.1	E.U.T. Operation	41
7.6.2	Test Mode Description	41
7.6.3	Test Setup Diagram	41
7.6.4	Measurement Procedure and Data	41
7.7	Carrier Frequencies Separation	42
7.7.1	E.U.T. Operation	42
7.7.2	Test Mode Description	42
7.7.3	Test Setup Diagram	42
7.7.4	Measurement Procedure and Data	42
7.8	Hopping Channel Number	43
7.8.1	E.U.T. Operation	43
7.8.2	Test Mode Description	43
7.8.3	Test Setup Diagram	43
7.8.4	Measurement Procedure and Data	43
7.9	Dwell Time	44
7.9.1	E.U.T. Operation	44
7.9.2	Test Mode Description	44
7.9.3	Test Setup Diagram	44
7.9.4	Measurement Procedure and Data	44
7.10	Conducted Band Edges Measurement	45
7.10.1	E.U.T. Operation	45
7.10.2	Test Mode Description	45
7.10.3	Test Setup Diagram	45
7.10.4	Measurement Procedure and Data	46
7.11	Conducted Spurious Emissions	47
7.11.1	E.U.T. Operation	47
7.11.2	Test Mode Description	47
7.11.3	Test Setup Diagram	47
7.11.4	Measurement Procedure and Data	47
8	Test Setup Photo	48
9	EUT Constructional Details (EUT Photos)	49
10	Appendix	50



4 General Information

4.1 Details of E.U.T.

Power supply: DC 5V
Cable(s): USB-C port
USB-C to USB transformer
Test Voltage: AC 120 V, 60 Hz powered by Note Book Computer refer to section 4.2
Minimum internal source: 40MHz
Operation Frequency: 2402MHz to 2480MHz
Modulation Type: GFSK, pi/4DQPSK, 8DPSK
Number of Channels: 79
Channel Spacing: 1MHz
Spectrum Spread Technology: Frequency Hopping Spread Spectrum(FHSS)
Antenna Type: Inverted-F Antenna
Antenna Gain: 0.03dBi according to antenna specification
Antenna Number: 1

Remark: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Note Book Computer	LENOVO	ThinkPad T490	PF1D1MVJ



4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
For SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch	
Radiated Emissions which fall in the restricted bands	$\pm 4.4\text{dB}$ (Above 1GHz)
Radiated Spurious Emissions Above 1GHz	$\pm 4.4\text{dB}$ (Above 1GHz)
For SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory	
Conducted Emissions at AC Power Line (150kHz-30MHz)	$\pm 3.22\text{dB}$
Radiated Spurious Emissions Below 1GHz	$\pm 3.08\text{dB}$ (9kHz to 150kHz); $\pm 3.19\text{dB}$ (150kHz to 30MHz); $\pm 5.14\text{dB}$ (30MHz-1GHz) (3m); $\pm 4.90\text{dB}$ (30MHz-1GHz) (10m)
Maximum Conducted Output Power	$\pm 0.75\text{dB}$
20dB Bandwidth	$\pm 0.274\%$
Carrier Frequencies Separation	$\pm 7.25 \times 10^{-8}$
Hopping Channel Number	$\pm 7.25 \times 10^{-8}$
Dwell Time	$\pm 0.029\%$
Conducted Band Edges Measurement	$\pm 0.75\text{dB}$
Conducted Spurious Emissions	$\pm 0.75\text{dB}$
Remark: The U_{lab} (lab Uncertainty) is less than U_{CISPR} (CISPR Uncertainty) or U_{ETSI} (ETSI Uncertainty). Emission decision rule: – Compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit, marked as Pass in the report. – Non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit, marked as Fail in the report.	

4.4 Test Location

Radiated Emissions which fall in the restricted bands and Radiated Spurious Emissions Above 1GHz tests were sub-contracted to:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

Other tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663

Tel: +86 20 82155555



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

4.5 Test Facility

For SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI (Member No. 1937)**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- **FCC –Designation Number: CN1336**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.



For SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory

The test facility is recognized, certified, or accredited by the following organizations:

● ACMA

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

● SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

● FCC Recognized Accredited Test Firm(Registration No.: 486818)

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

● ISED (Registration No.: 4620B, CAB identifier: CN0052)

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

● VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

● CBTL (Lab Code: TL129)

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



5 Equipment List

For SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Fully-Anechoic Chamber	AUDIX	N/A	SEM001-02	2025-05-07	2028-05-06
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2026-03-03	2027-03-02
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2025-07-22	2026-07-21
Microwave system amplifier	Agilent	83017A	SEM005-25	2025-09-10	2026-09-09
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2025-07-05	2026-07-04
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2025-07-22	2027-07-21

Radiated Spurious Emissions Above 1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Fully-Anechoic Chamber	AUDIX	N/A	SEM001-02	2025-05-07	2028-05-06
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2026-03-03	2027-03-02
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2025-07-22	2026-07-21
Microwave system amplifier	Agilent	83017A	SEM005-25	2025-09-10	2026-09-09
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2025-07-05	2026-07-04
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2025-07-22	2027-07-21



For SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Coaxial Cable	HangTianXing	BL03-NMNM-6.00M	EMC0107	2025-08-12	2026-08-11
Shielding Room	ChangZhou ZhongYu	8m x 3m x 3.8m	EMC0306	2025-08-14	2028-08-13
Two-Line V-Network-GZ	Rohde & Schwarz	ENV216	EMC2135	2025-08-13	2026-08-12
EMI Test Receiver (9kHz-3.6GHz)	Rohde & Schwarz	ESR3	EMC2221	2025-11-18	2026-11-17
Test Software E3r	Audix	Ver.6.191211	GZE100-77	N/A	N/A

Radiated Spurious Emissions Below 1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2025-08-13	2028-08-12
Coaxial cable	Mirco-COAX UTIFLEX	311A	EMC0540	2024-08-19	2026-08-18
Amplifier (9kHz-1.3GHz)	HP	8447F	EMC2065	2025-11-25	2026-11-24
Active Loop Antenna-RED	ETS-Lindgren	6502	EMC2190	2026-03-28	2028-03-27
EMI Test Receiver (9kHz-7GHz)	Rohde & Schwarz	ESR7	EMC2220	2025-11-18	2026-11-17
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
Trilog Broadband Antenna (25MHz-2GHz)	Schwarzbeck Mess-Elektronik	VULB 9168	EMC2174	2025-04-21	2027-04-20

RF Conducted Test					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
MI CABLE	SGS-EMC	0.8M	EMC2137	2025-11-02	2026-11-01
4X4 Power sensor Unit	TST	TSPS2023R	EMC2226	2025-08-12	2026-08-11
Test Software	TST	V2.0	GZE100-78	N/A	N/A
EXA Signal Analyzer (10Hz-44GHz)	Keysight	N9010A	EMC2138	2025-08-12	2026-08-11

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2025-06-03	2026-06-02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch EMC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement.

The best case gain of the antenna is 0.03 dBi.

Antenna location:

Refer to internal photo.



6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

6.2.2 Conclusion

Standard Requirement: The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals. Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section. The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted. Compliance for section 15.247(a)(1): According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. > Number of shift register stages: 9 > Length of pseudo-random sequence: $2^9 - 1 = 511$ bits > Longest sequence of zeros: 8 (non-inverted signal) Linear Feedback Shift Register for Generation of the PRBS sequence An example of Pseudorandom Frequency Hopping Sequence as follow: Each frequency used equally on the average by each transmitter. According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals. Compliance for section 15.247(g): According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system. Compliance for section 15.247(h): According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels. The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2020) Section 6.2

Test Engineer: Sunny Yang

Limit:

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:


Temperature: 24.6 °C Humidity: 56.3 % RH Atmospheric Pressure: 1007 mbar

7.1.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.



7.1.3 Test Setup Diagram

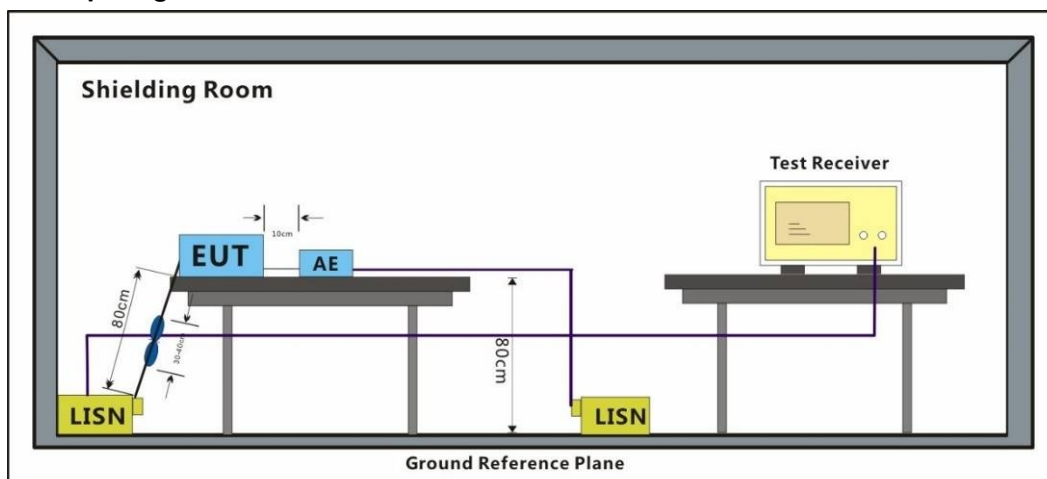


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor



Test Mode: 00; Line: Live line

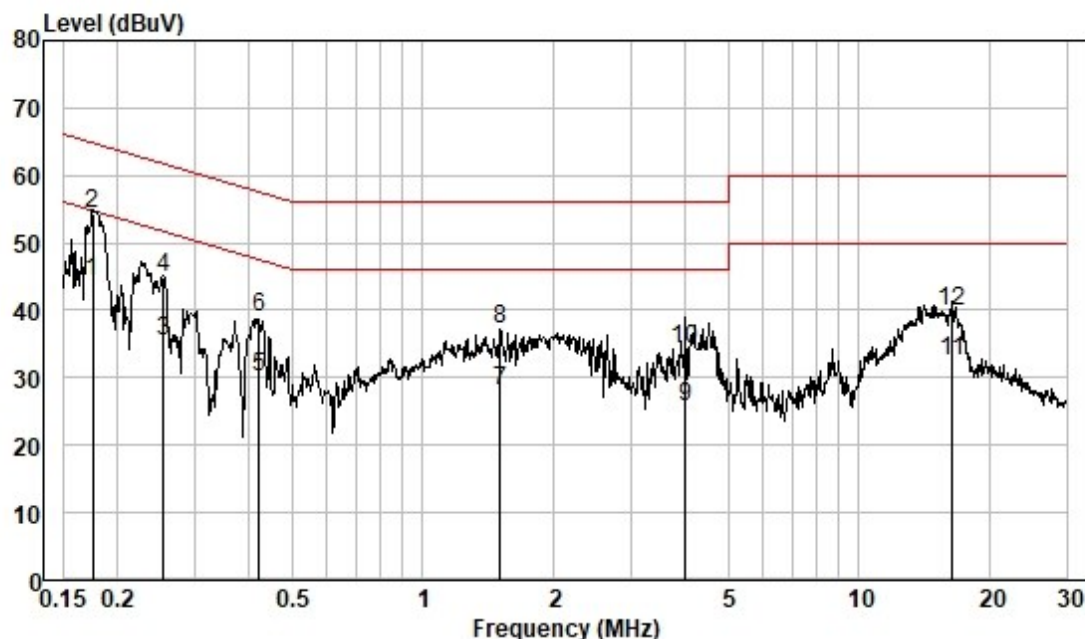


Pol :LINE
Mode :00
Model :
Power :

	Freque	Read	Cable	LISN	Measured	Limit	Over	Remark
	nc	Level	Loss	Factor	Level	Line	Limit	
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.175	34.62	0.04	9.52	44.18	54.72	-10.54	Average
2	0.175	44.64	0.04	9.52	54.20	64.72	-10.52	QP
3	0.255	25.88	0.04	9.52	35.44	51.60	-16.16	Average
4	0.255	35.31	0.04	9.52	44.87	61.60	-16.73	QP
5	0.421	20.64	0.05	9.56	30.25	47.42	-17.17	Average
6	0.421	29.42	0.05	9.56	39.03	57.42	-18.39	QP
7	1.503	18.47	0.10	9.58	28.15	46.00	-17.85	Average
8	1.503	27.40	0.10	9.58	37.08	56.00	-18.92	QP
9	4.006	15.75	0.18	9.62	25.55	46.00	-20.45	Average
10	4.006	24.41	0.18	9.62	34.21	56.00	-21.79	QP
11	16.398	22.35	0.34	9.83	32.52	50.00	-17.48	Average
12	16.398	29.76	0.34	9.83	39.93	60.00	-20.07	QP



Test Mode: 00; Line: Neutral Line

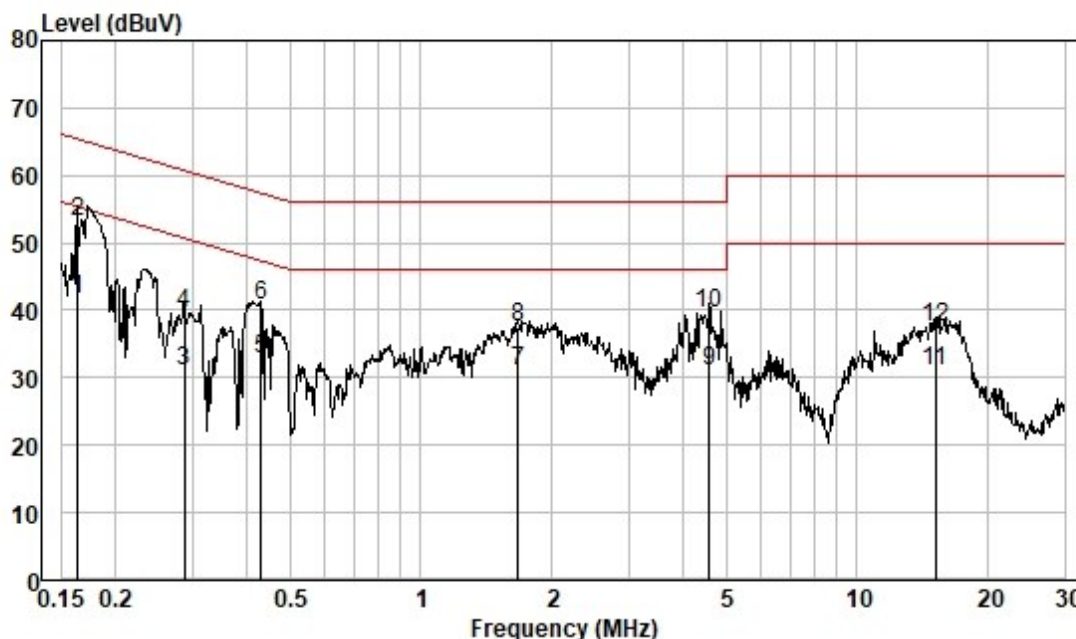

Pol :NEUTRAL
Mode :00
Model :
Power :

	Freque	Read	Cable	LISN	Measured	Limit	Over	Remark
	nc	Level	Loss	Factor	Level	Line	Limit	
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.163	32.02	0.04	9.52	41.58	55.30	-13.72	Average
2	0.163	43.52	0.04	9.52	53.08	65.30	-12.22	QP
3	0.286	21.37	0.04	9.52	30.93	50.63	-19.70	Average
4	0.286	29.96	0.04	9.52	39.52	60.63	-21.11	QP
5	0.431	23.24	0.05	9.57	32.86	47.24	-14.38	Average
6	0.431	30.99	0.05	9.57	40.61	57.24	-16.63	QP
7	1.671	21.22	0.11	9.55	30.88	46.00	-15.12	Average
8	1.671	27.69	0.11	9.55	37.35	56.00	-18.65	QP
9	4.574	21.13	0.19	9.63	30.95	46.00	-15.05	Average
10	4.574	29.63	0.19	9.63	39.45	56.00	-16.55	QP
11	15.146	20.75	0.33	9.93	31.01	50.00	-18.99	Average
12	15.146	27.13	0.33	9.93	37.39	60.00	-22.61	QP



7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2020) Section 6.10.5 & 7.8.8
 Test Engineer: Bill Chen
 Limit:
 Test Distance: 3 m

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


7.2.1 E.U.T. Operation

Operating Environment:
 Temperature: 20.5 °C Humidity: 53.7 % RH Atmospheric Pressure: 1007 mbar

7.2.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 00	TX_non-Hop mode Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

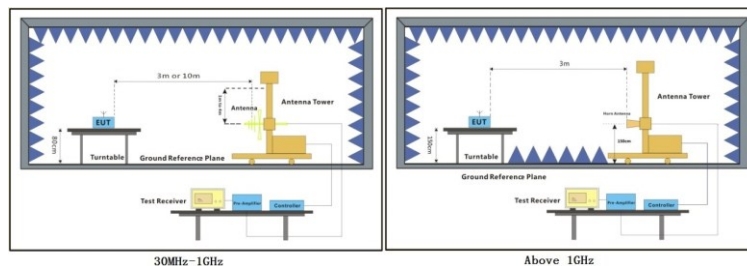

7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 4: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.



BT_3DH5_TX_CH_00_Horizontal

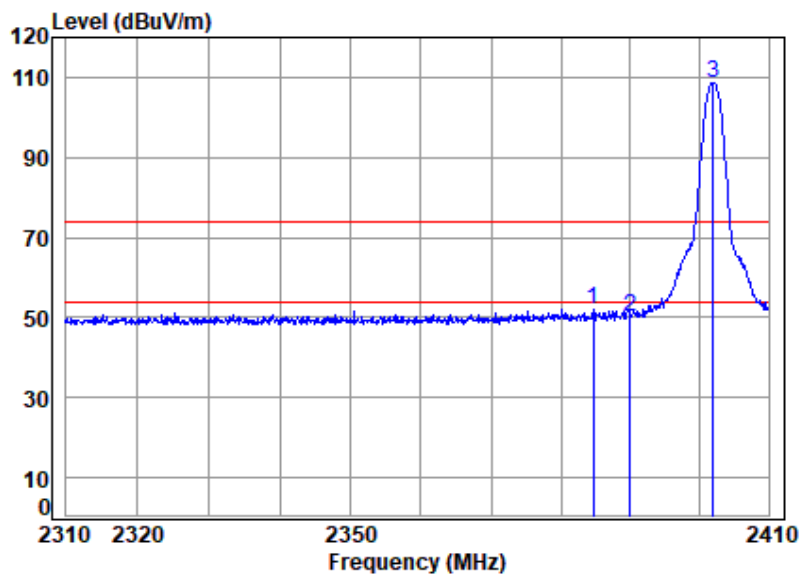


Condition: 3m HORIZONTAL
Job No : 00911AT/00912AT
Mode : 2402 Band edge
: BT 3DH5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2384.601	6.82	27.67	30.60	48.21	52.10	74.00	-21.90	Peak	0.00
2	2390.000	6.83	27.68	30.60	46.20	50.11	74.00	-23.89	Peak	0.00
3 pp	2402.000	6.84	27.70	30.60	104.66	108.60	74.00	34.60	Peak	0.00



BT_3DH5_TX_CH_00_Vertical

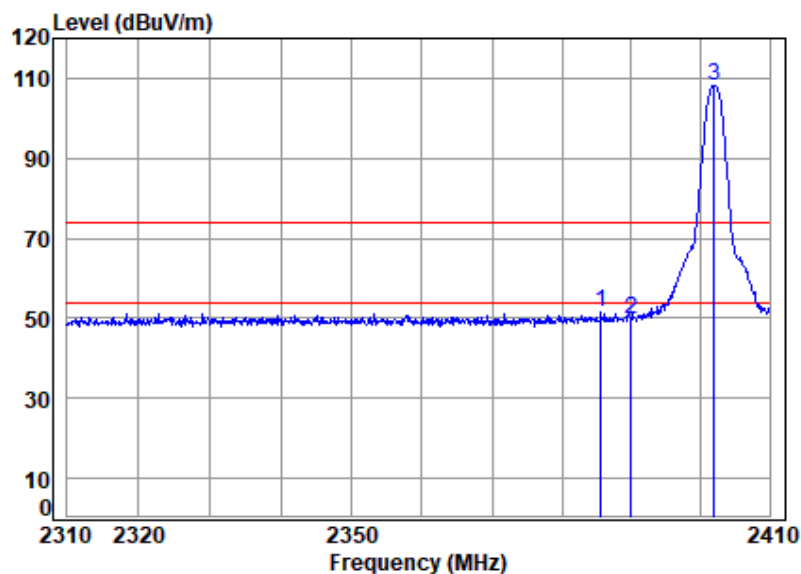


Condition: 3m VERTICAL
Job No : 00911AT/00912AT
Mode : 2402 Band edge
: BT 3DH5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2385.612	6.82	27.67	30.60	47.70	51.59	74.00	-22.41	Peak	0.00
2	2390.000	6.83	27.68	30.60	45.70	49.61	74.00	-24.39	Peak	0.00
3 pp	2402.000	6.84	27.70	30.60	104.26	108.20	74.00	34.20	Peak	0.00



BT_3DH5_TX_CH_78_Horizontal

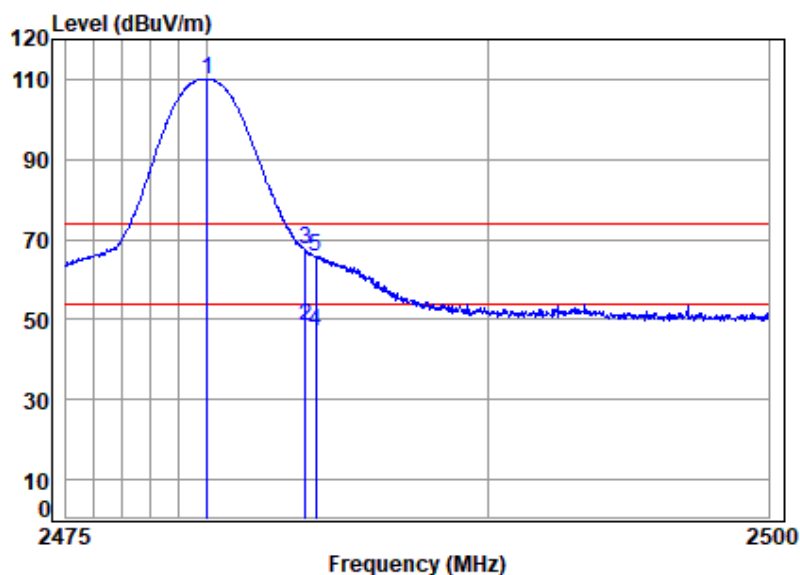


Condition: 3m HORIZONTAL
Job No : 00911AT/00912AT
Mode : 2480 Band edge
: BT 3DH5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	pp 2480.000	7.38	27.92	30.60	105.31	110.01	74.00	36.01	Peak	0.00
2	av 2483.500	7.40	27.93	30.60	43.86	48.59	54.00	-5.41	Average	0.00
3	2483.500	7.40	27.93	30.60	62.60	67.33	74.00	-6.67	Peak	0.00
4	2483.871	7.40	27.94	30.60	42.39	47.13	54.00	-6.87	Average	0.00
5	2483.871	7.40	27.94	30.60	61.13	65.87	74.00	-8.13	Peak	0.00



BT_3DH5_TX_CH_78_Vertical

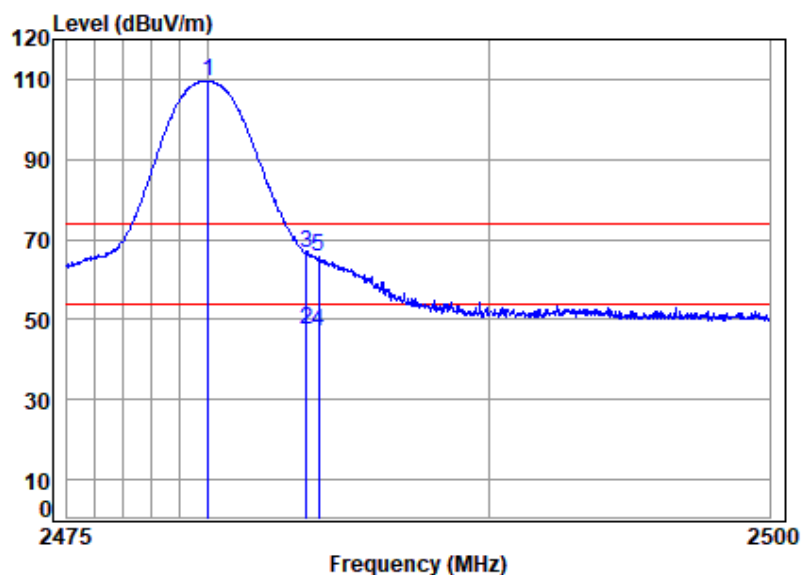

Condition: 3m VERTICAL
Job No : 00911AT/00912AT
Mode : 2480 Band edge
: BT 3DH5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	pp 2480.000	7.38	27.92	30.60	104.79	109.49	74.00	35.49	Peak	0.00
2	av 2483.500	7.40	27.93	30.60	42.93	47.66	54.00	-6.34	Average	0.00
3	2483.500	7.40	27.93	30.60	61.67	66.40	74.00	-7.60	Peak	0.00
4	2483.921	7.40	27.94	30.60	42.08	46.82	54.00	-7.18	Average	0.00
5	2483.921	7.40	27.94	30.60	60.82	65.56	74.00	-8.44	Peak	0.00



7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.4,6.5

Test Engineer: Bob Qu

Limit:

Test Distance: 3m

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

Note

1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

2: At frequencies below 1GHz, measurements may be performed at a distance different to specified in the regulations.

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Below 30MHz, Aux Factor = 40 dB/decade of distance, the aux factor is $40\log(3/300) = -80\text{dB}$ (for 3m test distance).

EX. Above 30MHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(10/3) = 10.46\text{dB}$ (for 10m test distance).



7.3.1 E.U.T. Operation

Operating Environment:


Temperature: 22.3 °C Humidity: 51.3 % RH Atmospheric Pressure: 1007 mbar

7.3.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	

TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

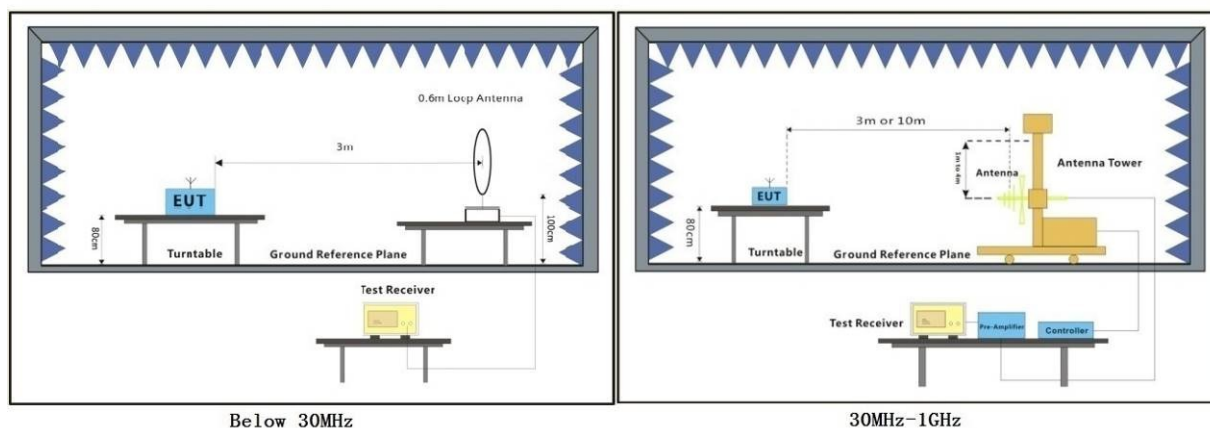

7.3.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8m above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3m or 10m away from the interference-receiving antenna, which was mounted on the variable-height antenna tower.
- The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1m) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- At frequencies below 1GHz, measurements may be performed at a distance different to specified in the regulations.

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Below 30MHz, Aux Factor = 40 dB/decade of distance, the aux factor is $40\log(3/300) = -80\text{dB}$ (for 3m test distance).


EX. Above 30MHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(10/3) = 10.46\text{dB}$ (for 10m test distance).

- Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

- The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the worst-case test curve is displayed.



Test Mode: 00; Polarity: Horizontal

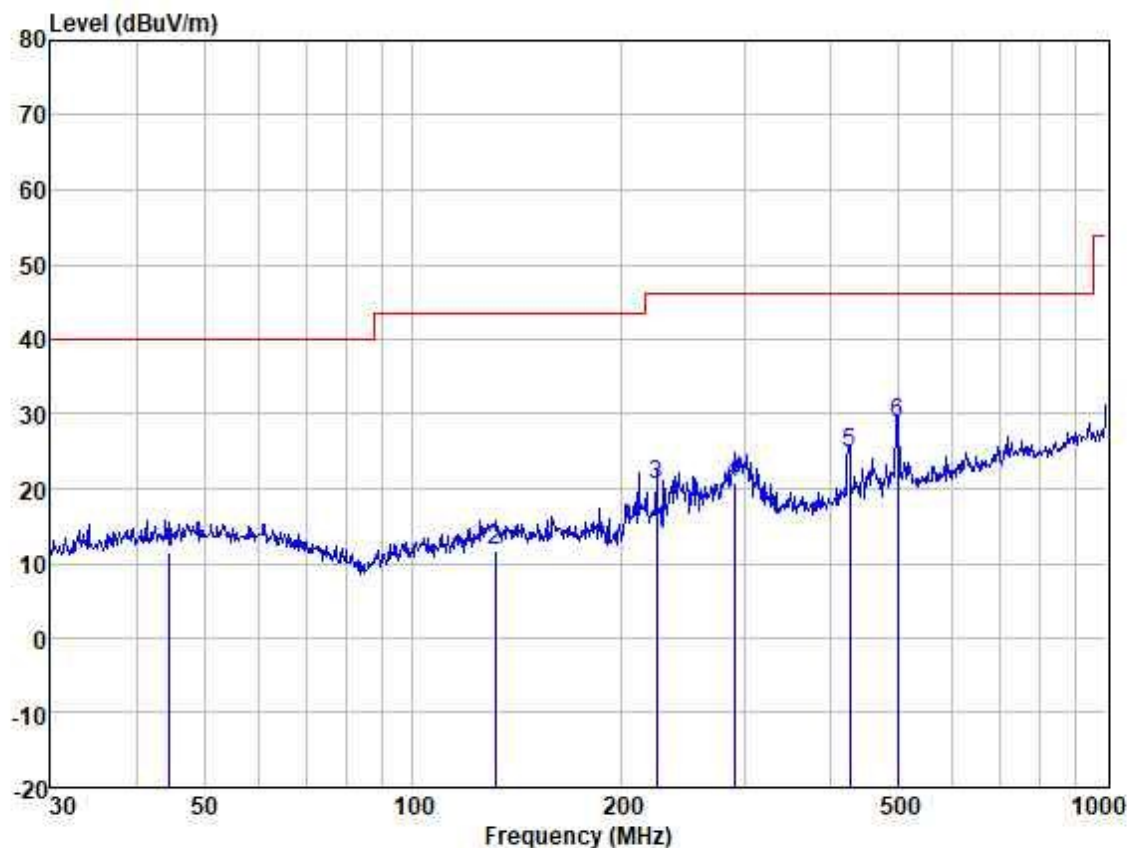


Site : SGS
t :
Model :
Power :
Test Mode :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	44.587	24.83	13.93	0.72	27.99	11.49	40.00	-28.51	HORIZONTAL	QP
2	131.297	26.24	12.34	0.93	27.85	11.66	43.52	-31.86	HORIZONTAL	QP
3	224.519	35.95	10.63	1.37	27.37	20.58	46.02	-25.44	HORIZONTAL	QP
4	291.036	33.01	13.45	1.67	27.21	20.92	46.02	-25.10	HORIZONTAL	QP
5	426.521	34.66	16.57	1.84	28.28	24.79	46.02	-21.23	HORIZONTAL	QP
6	499.425	37.55	17.95	1.89	28.60	28.79	46.02	-17.23	HORIZONTAL	QP



Test Mode: 00; Polarity: Vertical

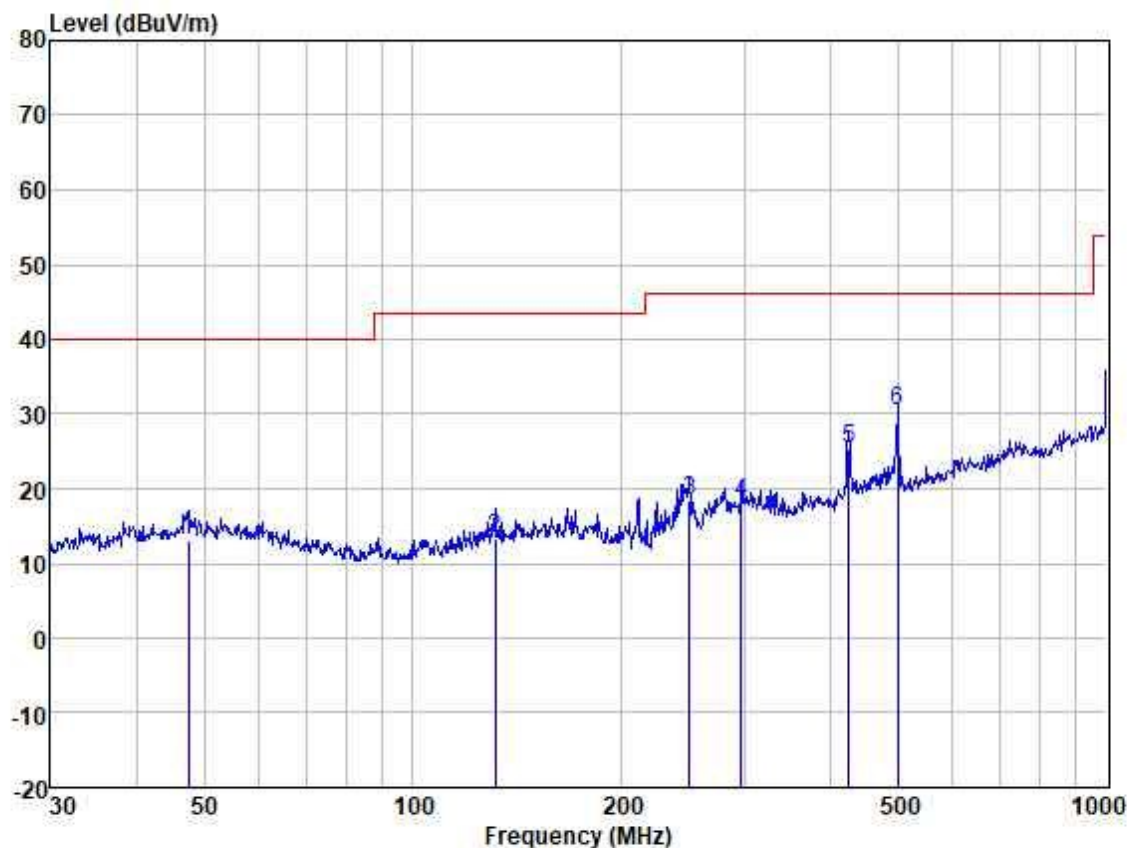

Site : SGS
t :
Model :
Power :
Test Mode :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	47.492	26.39	13.93	0.73	27.98	13.07	40.00	-26.93	VERTICAL	QP
2	131.297	28.02	12.34	0.93	27.85	13.44	43.52	-30.08	VERTICAL	QP
3	250.301	32.06	12.03	1.54	27.29	18.34	46.02	-27.68	VERTICAL	QP
4	297.224	30.01	13.51	1.68	27.20	18.00	46.02	-28.02	VERTICAL	QP
5	425.028	35.37	16.47	1.84	28.26	25.42	46.02	-20.60	VERTICAL	QP
6	499.425	39.06	17.95	1.89	28.60	30.30	46.02	-15.72	VERTICAL	QP



7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.6 & 7.8.8

Test Engineer: Bill Chen

Limit:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
Above 1000	500	3

Note:

At Above 18GHz, measurements may be performed at a distance shorter than that specified in the regulations

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Above 18GHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(1/3) = -9.54\text{dB}$ (for 1m test distance).

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C

Humidity: 53.7 % RH


Atmospheric Pressure: 1007 mbar

7.4.2 Test Mode Description

Pre-scan / Mode
Final test Code Description

Final test 00 TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

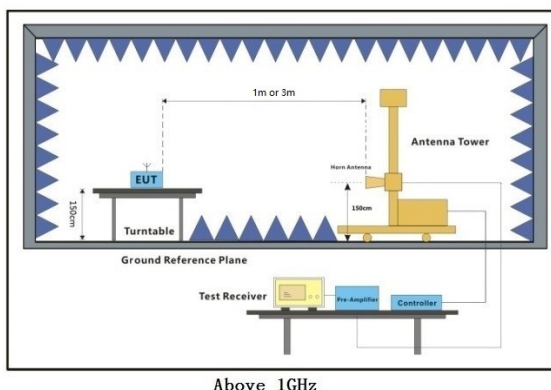

7.4.4 Measurement Procedure and Data


- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5m above the ground at a 3m fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3m away from the interference-receiving antenna from 1GHz to 18GHz, and 1m away from the interference-receiving antenna above 18GHz.
- b. The interference-receiving antenna was mounted on the variable-height antenna tower, with its boresight facing the EUT throughout the test.
- c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- g. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- h. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Scan from 1GHz to 10th harmonic of the highest frequency or 40 GHz, whichever is lower.
2. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
3. For the frequency above 18GHz, testing had been executed under all test modes, only the worst-case test curve is displayed in the report.
4. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst-case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.



BT_3DH5_TX_CH_78_Horizontal

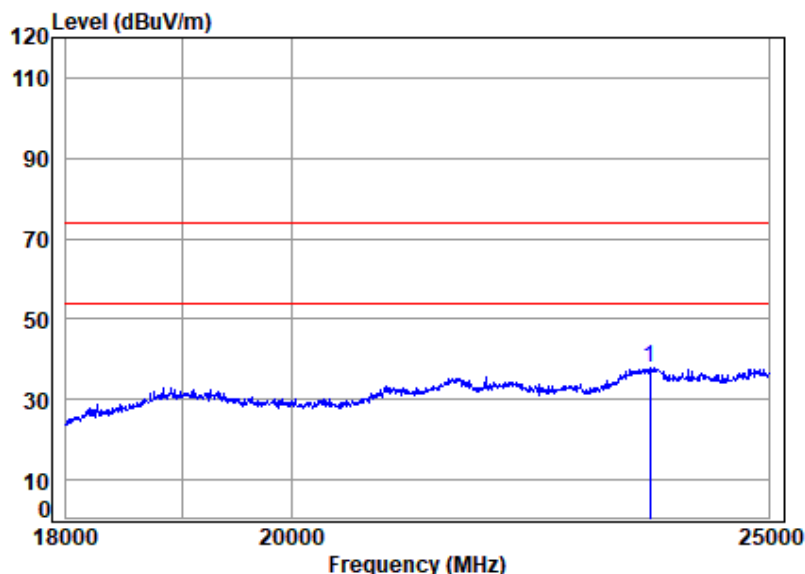


Condition: 3m HORIZONTAL
Job No : 00911AT/00912AT
Mode : 2480 TX RSE
: BT

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp23649.890	6.77	38.60	50.33	52.35	37.85	74.00	-36.15	Peak	-9.54



BT_3DH5_TX_CH_78_Vertical

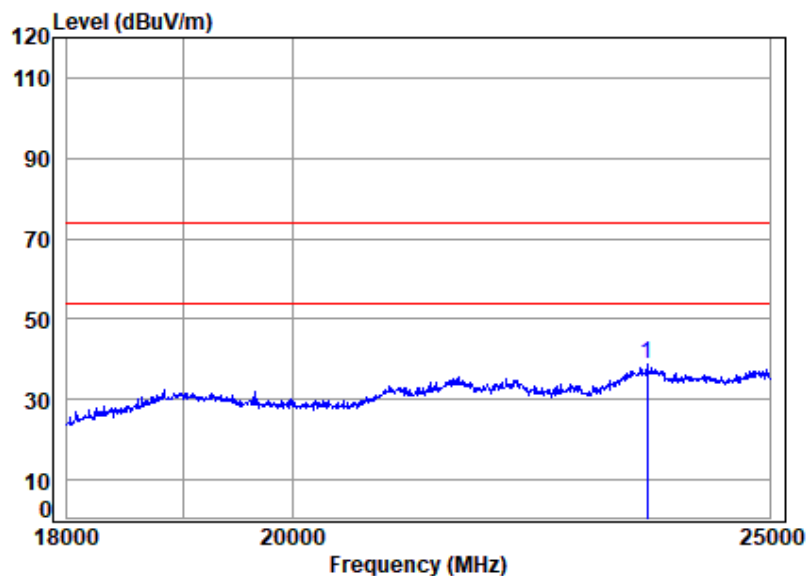


Condition: 3m VERTICAL
Job No : 00911AT/00912AT
Mode : 2480 TX RSE
: BT

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp23611.080	6.76	38.52	50.32	53.49	38.91	74.00	-35.09	Peak	-9.54



BT_3DH5_TX_CH_00_Horizontal

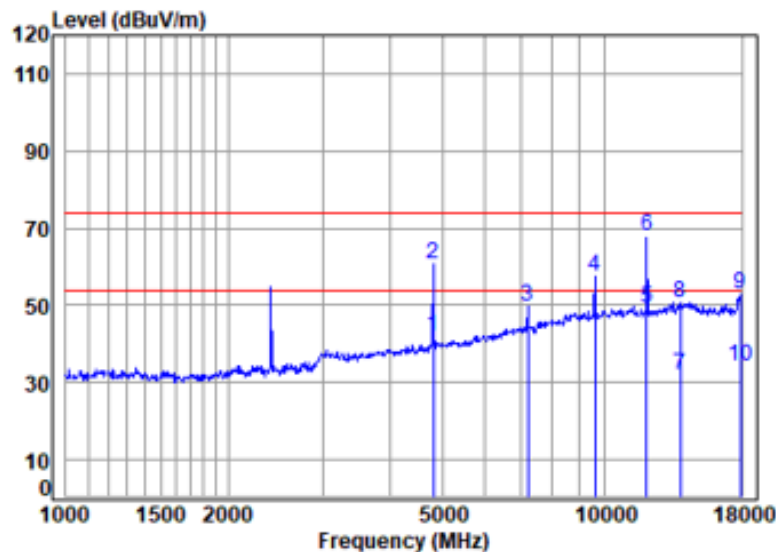


Condition: 3m HORIZONTAL
Job No : 00911AT/00912AT
Mode : 2402 TX RSE
: BT 3DH5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1	4804.110	8.90	32.62	55.92	56.17	41.77	54.00	-12.23 Average	0.00
2	4804.110	8.90	32.62	55.92	74.91	60.51	74.00	-13.49 Peak	0.00
3	7200.309	11.10	37.00	56.37	58.11	49.84	74.00	-24.16 Peak	0.00
4	9613.430	12.40	38.75	54.01	60.19	57.33	74.00	-16.67 Peak	0.00
5	9613.430	12.40	38.75	54.01	41.19	38.33	54.00	-15.67 Average	0.00
6	pp12009.760	14.35	39.29	53.21	48.93	49.36	54.00	-4.64 Average	0.00
7	pk12009.760	14.35	39.29	53.21	67.67	68.10	74.00	-5.90 Peak	0.00
8	13837.020	15.67	40.26	54.05	30.23	32.11	54.00	-21.89 Average	0.00
9	13837.020	15.67	40.26	54.05	48.97	50.85	74.00	-23.15 Peak	0.00
10	17896.250	18.87	41.97	54.26	46.19	52.77	74.00	-21.23 Peak	0.00
11	17896.250	18.87	41.97	54.26	27.45	34.03	54.00	-19.97 Average	0.00



BT_3DH5_TX_CH_00_Vertical

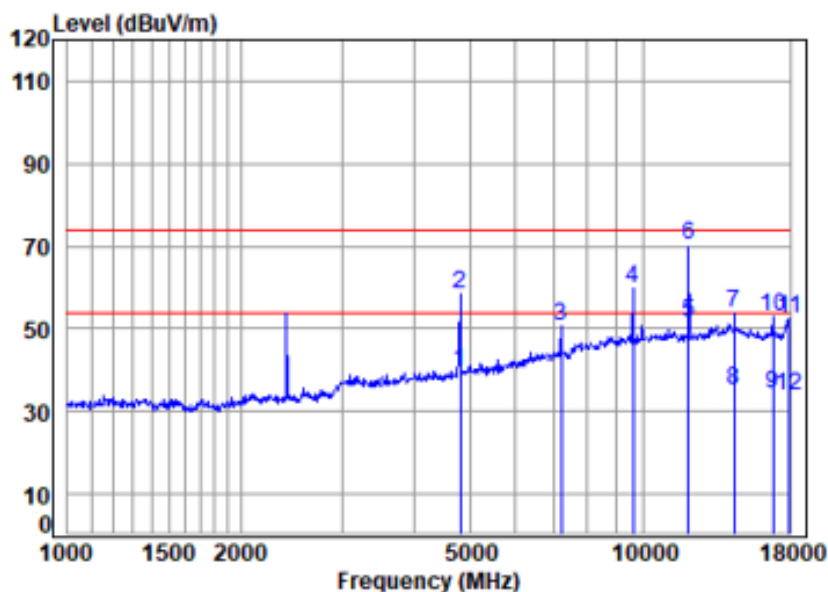


Condition: 3m VERTICAL
Job No : 00911AT/00912AT
Mode : 2402 TX RSE
: BT 3DH5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4804.110	8.90	32.62	55.92	53.94	39.54	54.00	-14.46	Average	0.00
2	4804.110	8.90	32.62	55.92	72.68	58.28	74.00	-15.72	Peak	0.00
3	7200.309	11.10	37.00	56.37	58.89	50.62	74.00	-23.38	Peak	0.00
4	9613.430	12.40	38.75	54.01	62.48	59.62	74.00	-14.38	Peak	0.00
5	9613.430	12.40	38.75	54.01	43.74	40.88	54.00	-13.12	Average	0.00
6	pp12009.760	14.35	39.29	53.21	51.13	51.56	54.00	-2.44	Average	0.00
7	pk12009.760	14.35	39.29	53.21	69.87	70.30	74.00	-3.70	Peak	0.00
8	14408.430	16.90	40.38	54.10	50.65	53.83	74.00	-20.17	Peak	0.00
9	14408.430	16.90	40.38	54.10	31.91	35.09	54.00	-18.91	Average	0.00
10	16793.680	17.45	38.59	53.86	32.23	34.41	54.00	-19.59	Average	0.00
11	16793.680	17.45	38.59	53.86	50.97	53.15	74.00	-20.85	Peak	0.00
12	17948.050	18.75	42.29	54.28	45.62	52.38	74.00	-21.62	Peak	0.00
13	17948.050	18.75	42.29	54.28	26.88	33.64	54.00	-20.36	Average	0.00



BT_3DH5_TX_CH_39_Horizontal

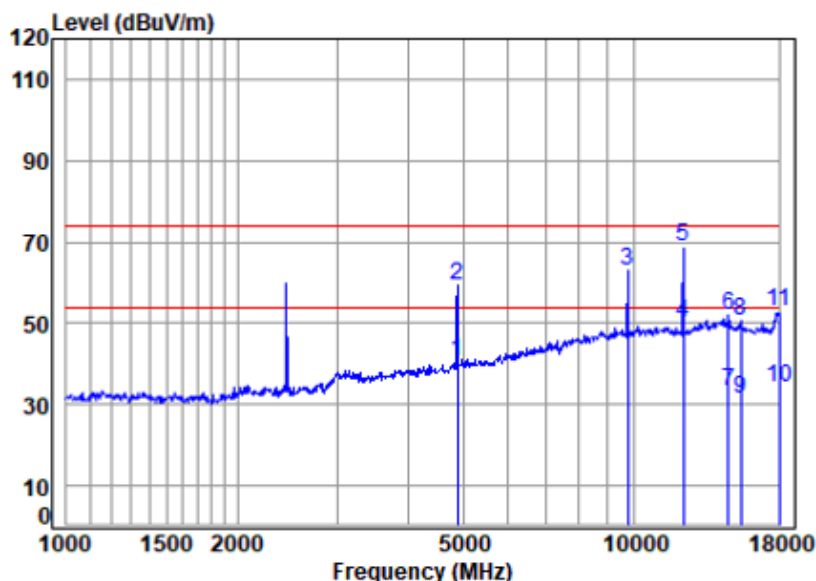


Condition: 3m HORIZONTAL
Job No : 00911AT/00912AT
Mode : 2441 TX RSE
: BT 3DH5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4888.151	8.99	32.88	56.00	54.56	40.43	54.00	-13.57	Average	0.00
2	4888.151	8.99	32.88	56.00	73.30	59.17	74.00	-14.83	Peak	0.00
3	9753.371	12.82	38.41	53.86	65.65	63.02	74.00	-10.98	Peak	0.00
4	9753.371	12.82	38.41	53.86	46.91	44.28	54.00	-9.72	Average	0.00
5	pp12219.850	14.54	39.40	53.34	49.71	50.31	54.00	-3.69	Average	0.00
6	pk12219.850	14.54	39.40	53.34	68.45	69.05	74.00	-4.95	Peak	0.00
7	14660.480	16.87	40.20	54.10	49.02	51.99	74.00	-22.01	Peak	0.00
8	14660.480	16.87	40.20	54.10	30.28	33.25	54.00	-20.75	Average	0.00
9	15443.410	16.96	38.96	53.92	48.43	50.43	74.00	-23.57	Peak	0.00
10	15443.410	16.96	38.96	53.92	29.69	31.69	54.00	-22.31	Average	0.00
11	18000.000	18.64	42.60	54.30	27.16	34.10	54.00	-19.90	Average	0.00
12	18000.000	18.64	42.60	54.30	45.90	52.84	74.00	-21.16	Peak	0.00



BT_3DH5_TX_CH_39_Vertical

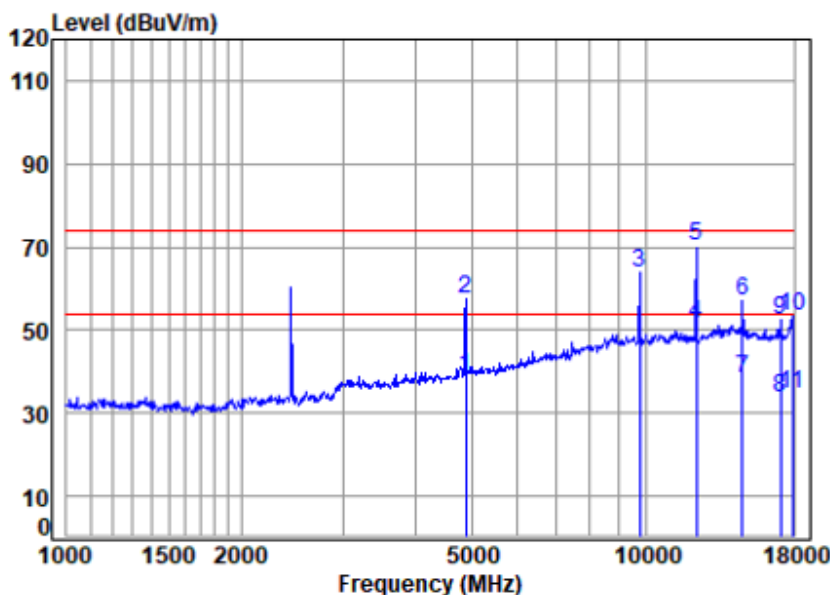


Condition: 3m VERTICAL
Job No : 00911AT/00912AT
Mode : 2441 TX RSE
: BT 3DH5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4888.151	8.99	32.88	56.00	53.04	38.91	54.00	-15.09	Average	0.00
2	4888.151	8.99	32.88	56.00	71.78	57.65	74.00	-16.35	Peak	0.00
3	9753.371	12.82	38.41	53.86	66.73	64.10	74.00	-9.90	Peak	0.00
4	9753.371	12.82	38.41	53.86	48.34	45.71	54.00	-8.29	Average	0.00
5	pp12219.850	14.54	39.40	53.34	50.99	51.59	54.00	-2.41	Average	0.00
6	pk12219.850	14.54	39.40	53.34	69.73	70.33	74.00	-3.67	Peak	0.00
7	14660.480	16.87	40.20	54.10	54.04	57.01	74.00	-16.99	Peak	0.00
8	14660.480	16.87	40.20	54.10	35.30	38.27	54.00	-15.73	Average	0.00
9	17087.460	17.89	38.89	53.94	31.08	33.92	54.00	-20.08	Average	0.00
10	17087.460	17.89	38.89	53.94	49.82	52.66	74.00	-21.34	Peak	0.00
11	17896.250	18.87	41.97	54.26	46.80	53.38	74.00	-20.62	Peak	0.00
12	17896.250	18.87	41.97	54.26	28.06	34.64	54.00	-19.36	Average	0.00



BT_3DH5_TX_CH_78_Horizontal

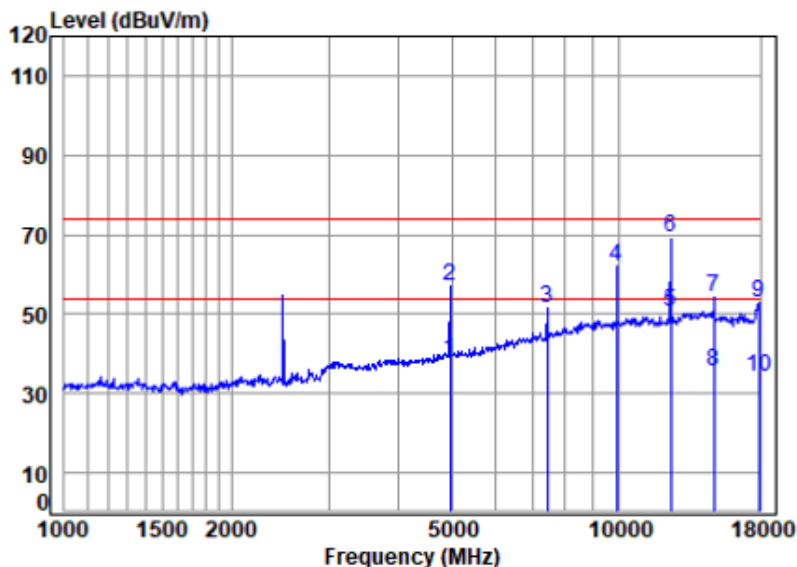


Condition: 3m HORIZONTAL
Job No : 00911AT/00912AT
Mode : 2480 TX RSE
: BT 3DH5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4959.307	9.07	33.12	56.06	52.10	38.23	54.00	-15.77	Average	0.00
2	4959.307	9.07	33.12	56.06	70.84	56.97	74.00	-17.03	Peak	0.00
3	7432.914	11.10	36.77	56.23	60.03	51.67	74.00	-22.33	Peak	0.00
4	9923.991	12.74	38.65	53.68	64.27	61.98	74.00	-12.02	Peak	0.00
5	9923.991	12.74	38.65	53.68	45.44	43.15	54.00	-10.85	Average	0.00
6	pp12397.740	14.75	39.30	53.44	50.17	50.78	54.00	-3.22	Average	0.00
7	pk12397.740	14.75	39.30	53.44	68.91	69.52	74.00	-4.48	Peak	0.00
8	14873.890	16.94	39.88	54.10	51.40	54.12	74.00	-19.88	Peak	0.00
9	14873.890	16.94	39.88	54.10	32.66	35.38	54.00	-18.62	Average	0.00
10	17896.250	18.87	41.97	54.26	46.50	53.08	74.00	-20.92	Peak	0.00
11	17896.250	18.87	41.97	54.26	27.76	34.34	54.00	-19.66	Average	0.00



BT_3DH5_TX_CH_78_Vertical

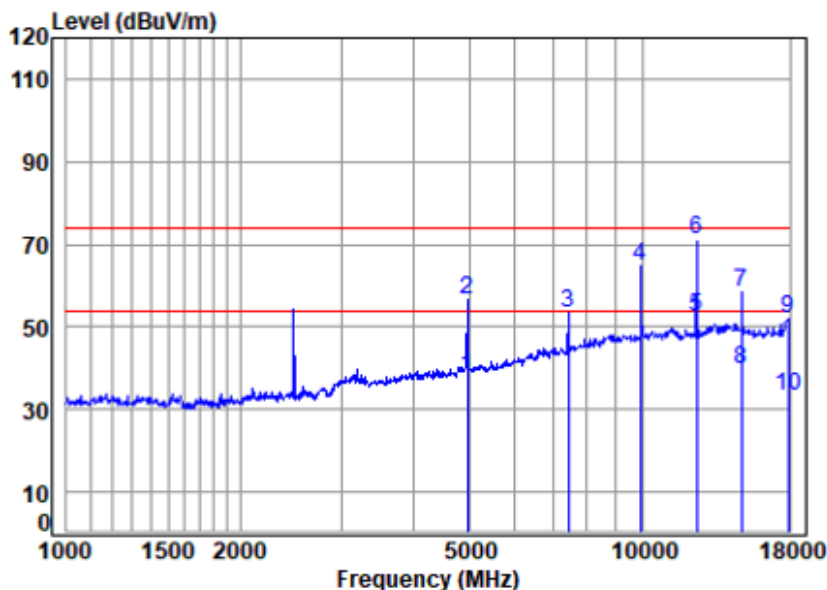

Condition: 3m VERTICAL

Job No : 00911AT/00912AT

Mode : 2480 TX RSE

: BT 3DH5

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	4959.307	9.07	33.12	56.06	51.92	38.05	54.00	-15.95	Average	0.00
2	4959.307	9.07	33.12	56.06	70.66	56.79	74.00	-17.21	Peak	0.00
3	7432.914	11.10	36.77	56.23	61.53	53.17	74.00	-20.83	Peak	0.00
4	9923.991	12.74	38.65	53.68	66.89	64.60	74.00	-9.40	Peak	0.00
5	9923.991	12.74	38.65	53.68	45.68	43.39	54.00	-10.61	Average	0.00
6	pp12397.740	14.75	39.30	53.44	51.65	52.26	54.00	-1.74	Average	0.00
7	pk12397.740	14.75	39.30	53.44	70.39	71.00	74.00	-3.00	Peak	0.00
8	14873.890	16.94	39.88	54.10	55.50	58.22	74.00	-15.78	Peak	0.00
9	14873.890	16.94	39.88	54.10	36.76	39.48	54.00	-14.52	Average	0.00
10	17896.250	18.87	41.97	54.26	45.46	52.04	74.00	-21.96	Peak	0.00
11	17896.250	18.87	41.97	54.26	26.72	33.30	54.00	-20.70	Average	0.00



7.5 Maximum Conducted Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(1)

Test Method: ANSI C63.10 (2020) Section 7.8.5

Test Engineer: Banna Ban

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 21.0 °C

Humidity: 69.0 % RH


Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.



7.5.3 Test Setup Diagram

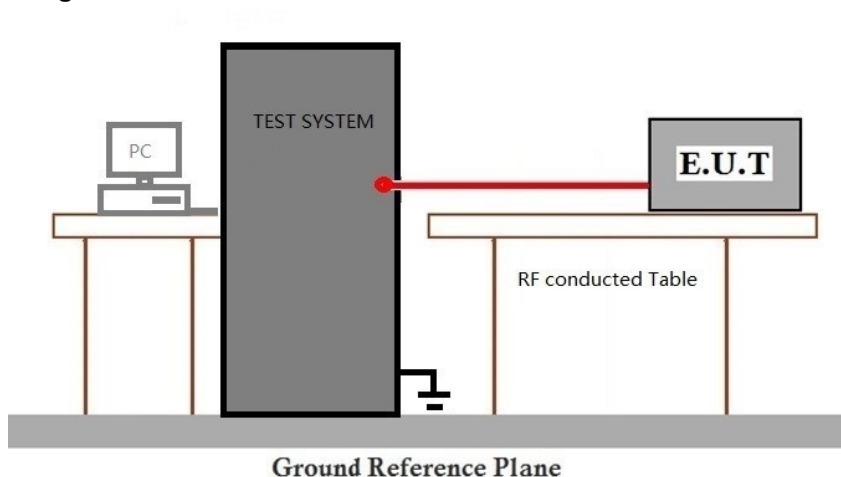

7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details



7.6 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)
 Test Method: ANSI C63.10 (2020) Section 6.9.2
 Test Engineer: Banna Ban

7.6.1 E.U.T. Operation


Operating Environment:

Temperature: 21.0 °C Humidity: 69.0 % RH Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

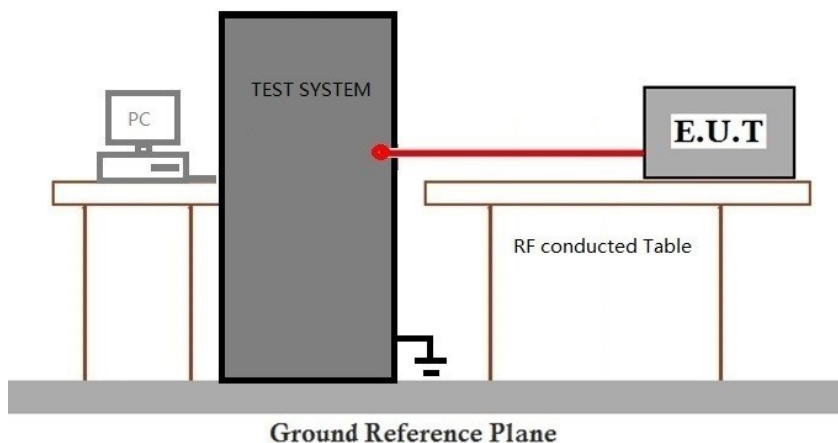

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Carrier Frequencies Separation

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)

Test Method: ANSI C63.10 (2020) Section 7.8.2

Test Engineer: Banna Ban

Limit:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 21.0 °C

Humidity: 69.0 % RH

Atmospheric Pressure: 1010 mbar


7.7.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	

Final test 01

TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

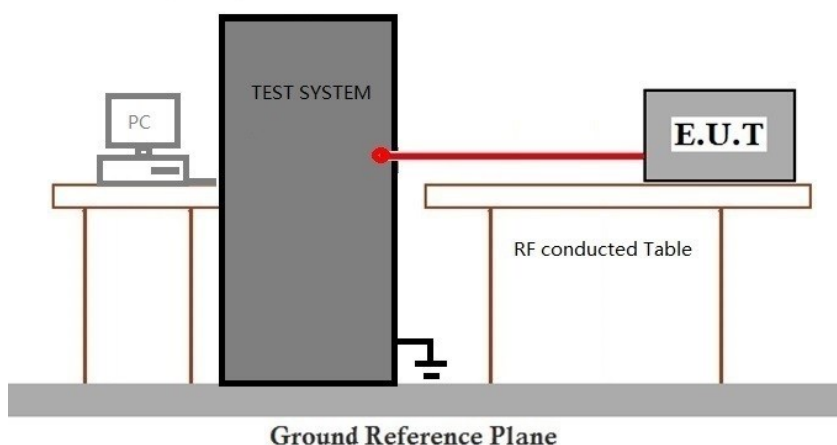

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

7.8 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2020) Section 7.8.3

Test Engineer: Banna Ban

Limit:

Frequency range(MHz)	Number of hopping channels (minimum)
02-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

7.8.1 E.U.T. Operation

Operating Environment:


Temperature: 21.0 °C Humidity: 69.0 % RH Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Mode
Final test Code Description

Final test 01 TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

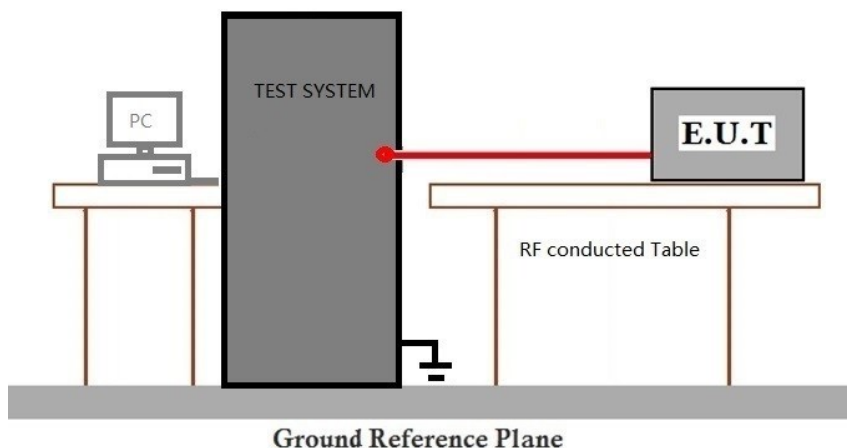

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.9 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2020) Section 7.8.4

Test Engineer: Banna Ban

Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 21.0 °C

Humidity: 69.0 % RH


Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	

Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
------------	----	--

7.9.3 Test Setup Diagram

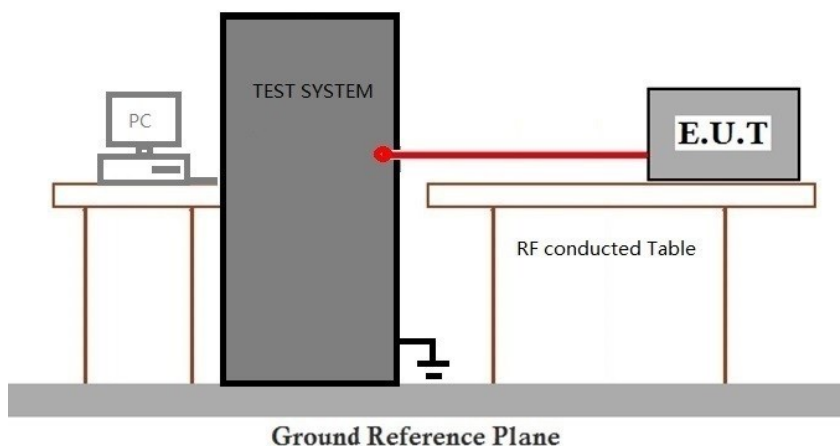

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.10 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 7.8.7.2

Test Engineer: Banna Ban

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 21.0 °C


Humidity: 69.0 % RH

Atmospheric Pressure: 1010 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.10.3 Test Setup Diagram

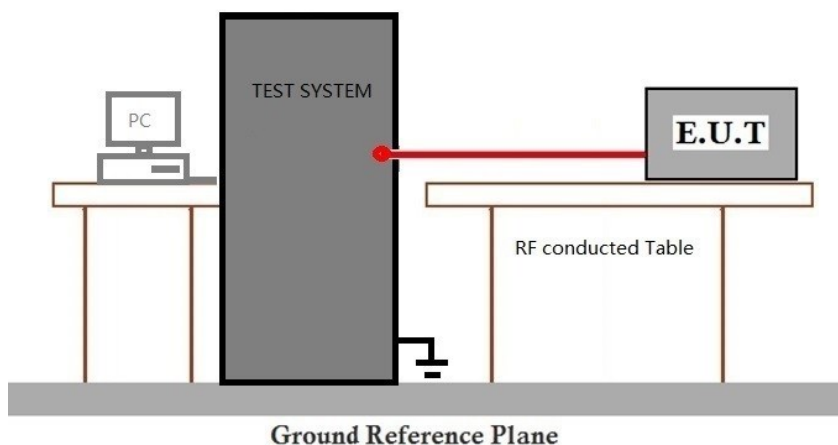

7.10.4 Measurement Procedure and Data

Please Refer to Appendix for Details



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Competency Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.ssgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

7.11 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 7.8.7

Test Engineer: Banna Ban

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c).

7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 21.0 °C

Humidity: 69.0 % RH


Atmospheric Pressure: 1010 mbar

7.11.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	

Final test	00	TX_non-Hop mode Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
------------	----	--

7.11.3 Test Setup Diagram

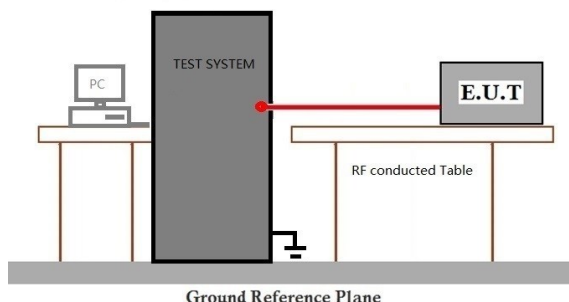

7.11.4 Measurement Procedure and Data

Please Refer to Appendix for Details



8 Test Setup Photo

Refer to Setup Photo for GZCR260200037702



9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for GZCR2602000377AT



10 Appendix

1. Bandwidth

1.1 Test Result

1.1.1 20dB BW

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.937	/	Pass
		2441	DH5	1	0.939	/	Pass
		2480	DH5	1	0.935	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.436	/	Pass
		2441	2DH5	1	1.368	/	Pass
		2480	2DH5	1	1.425	/	Pass
8DPSK	SISO	2402	3DH5	1	1.415	/	Pass
		2441	3DH5	1	1.419	/	Pass
		2480	3DH5	1	1.400	/	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch - Competency Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663


t (86-20) 82155555 www.ssgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

1.2 Test Graph


1.2.1 20dB BW

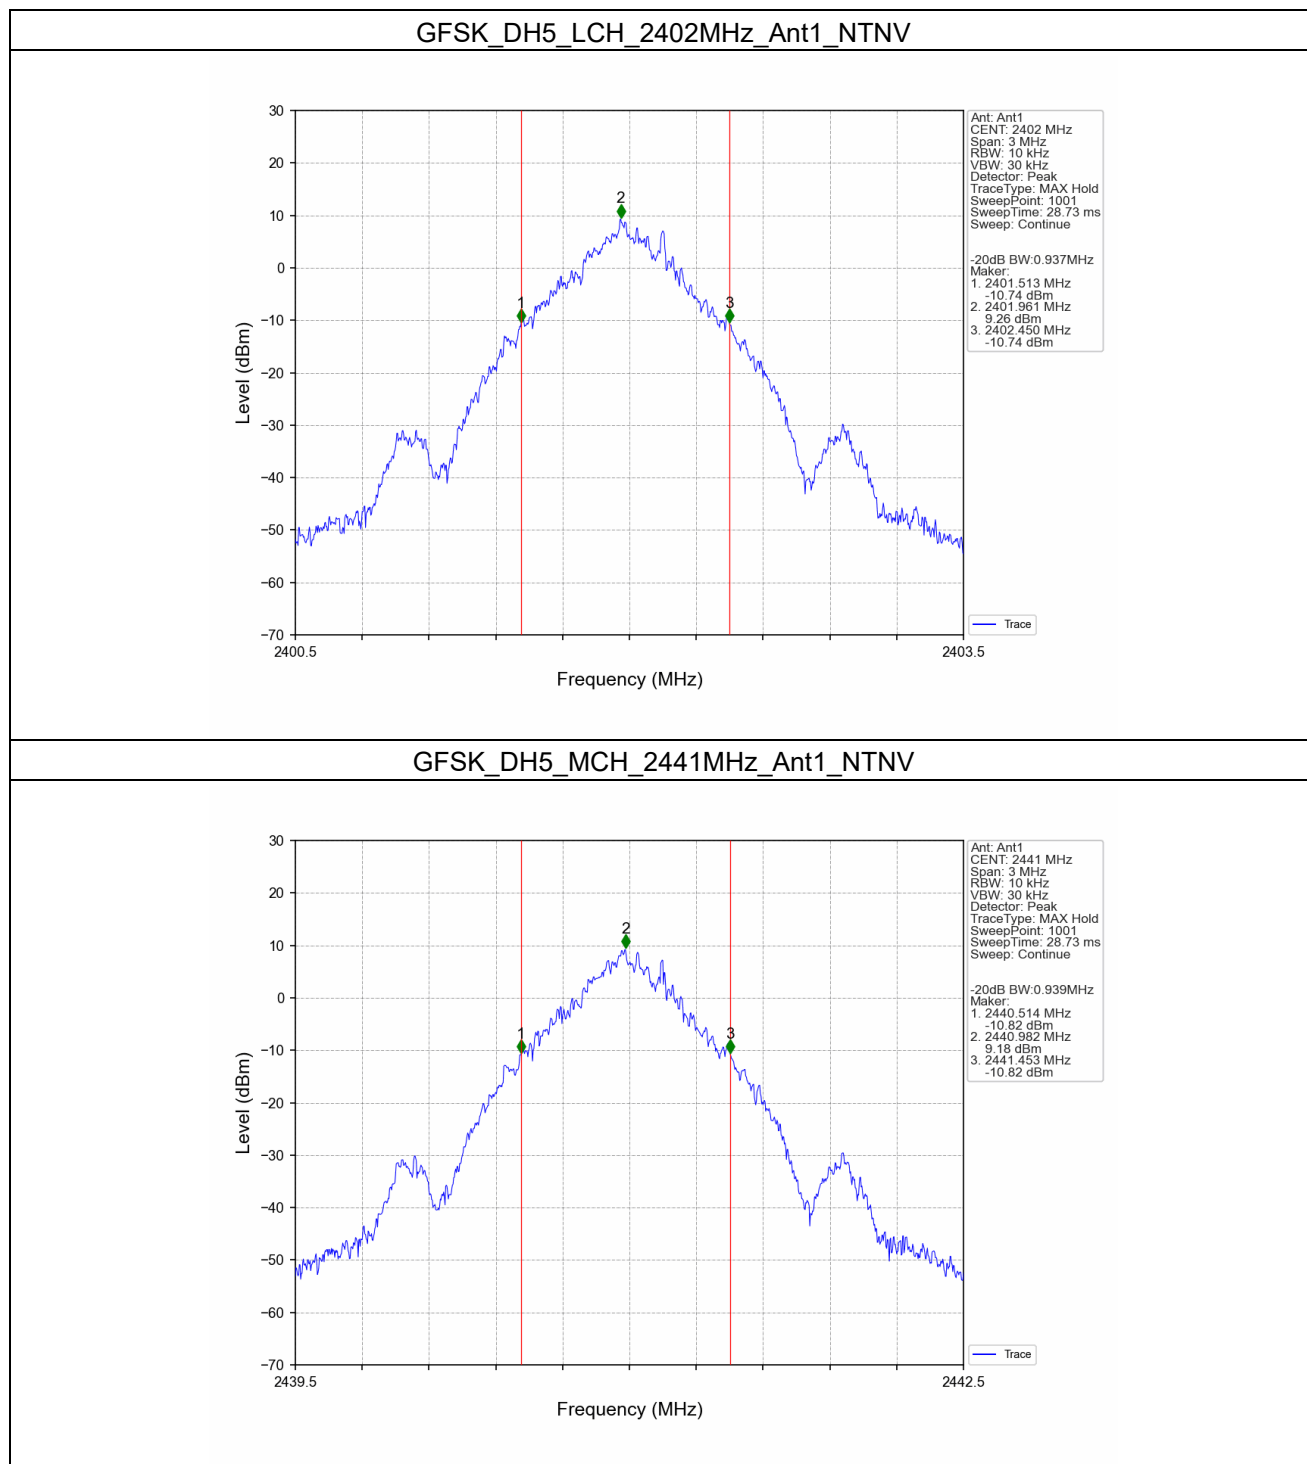


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

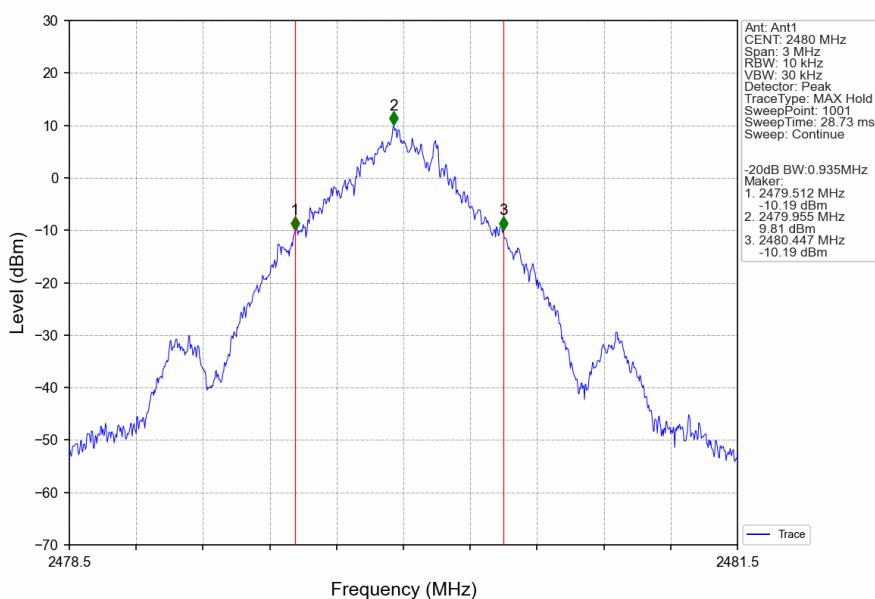


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

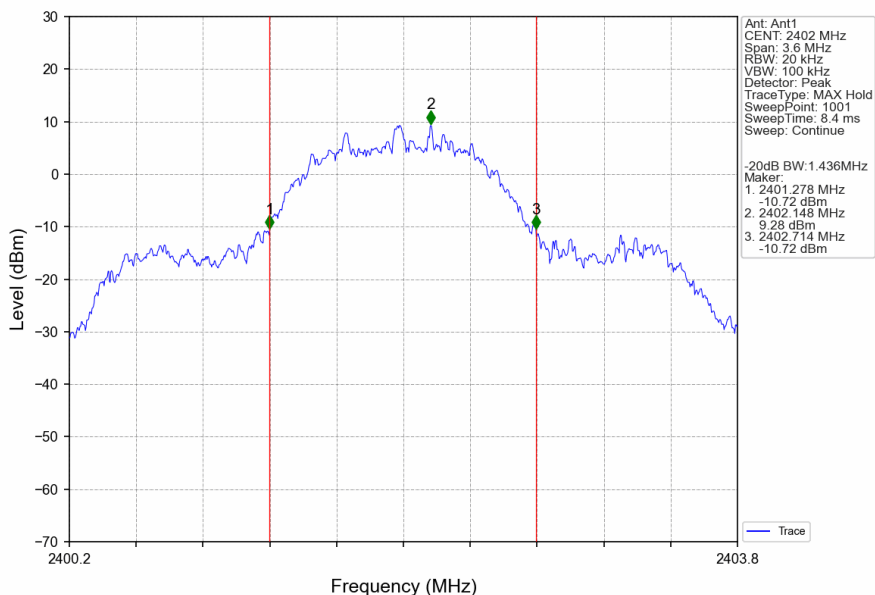


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

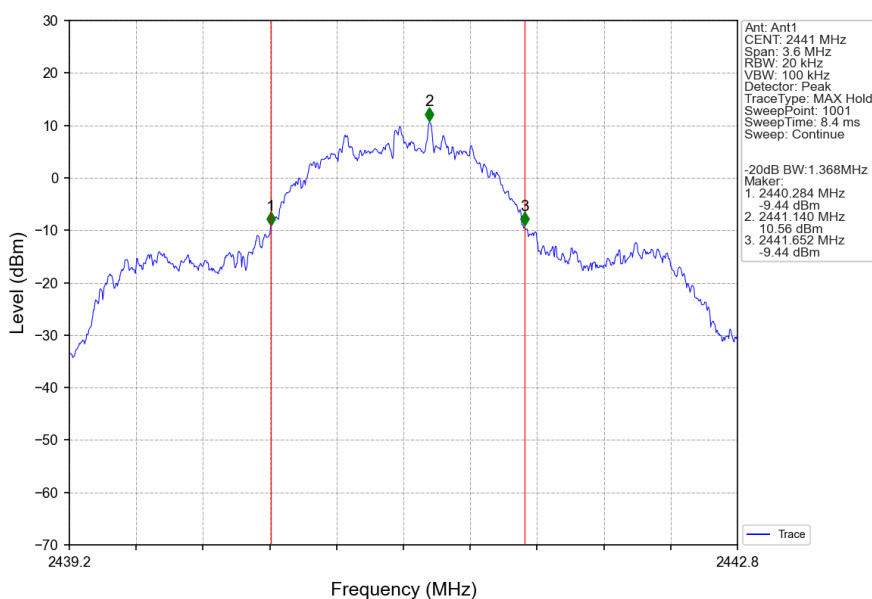


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

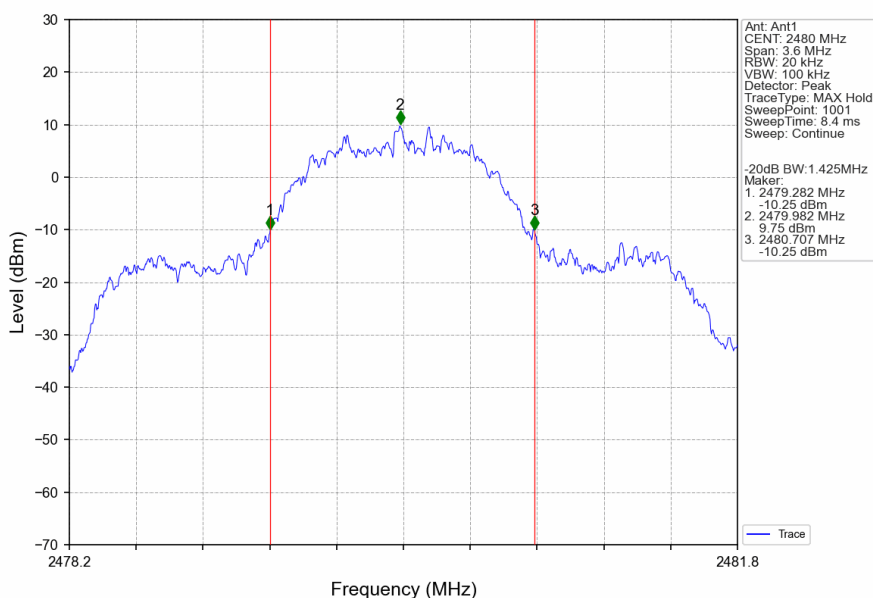


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

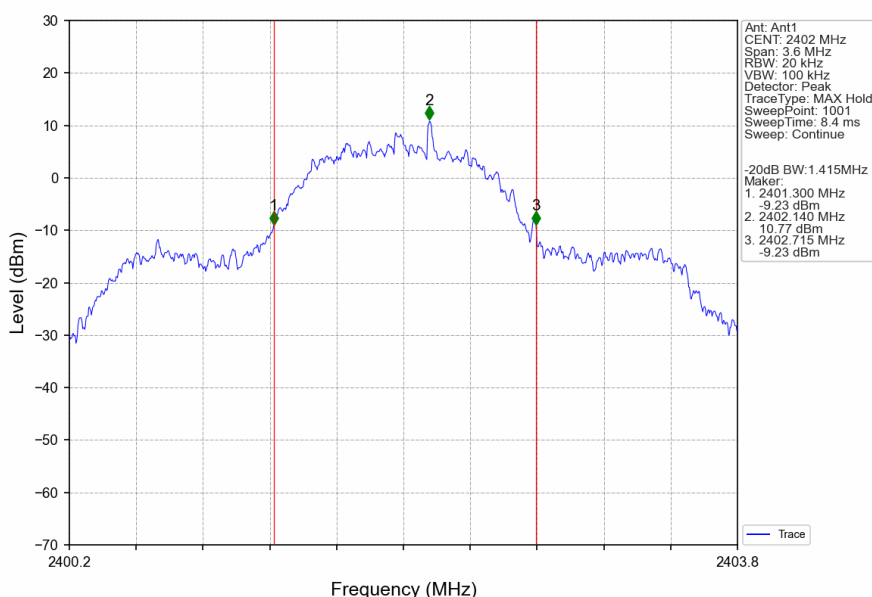

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

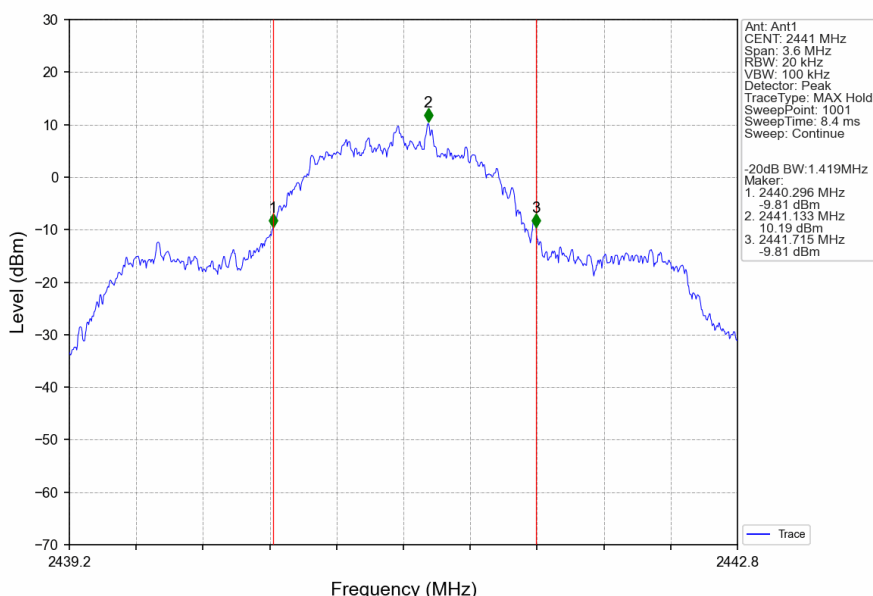

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

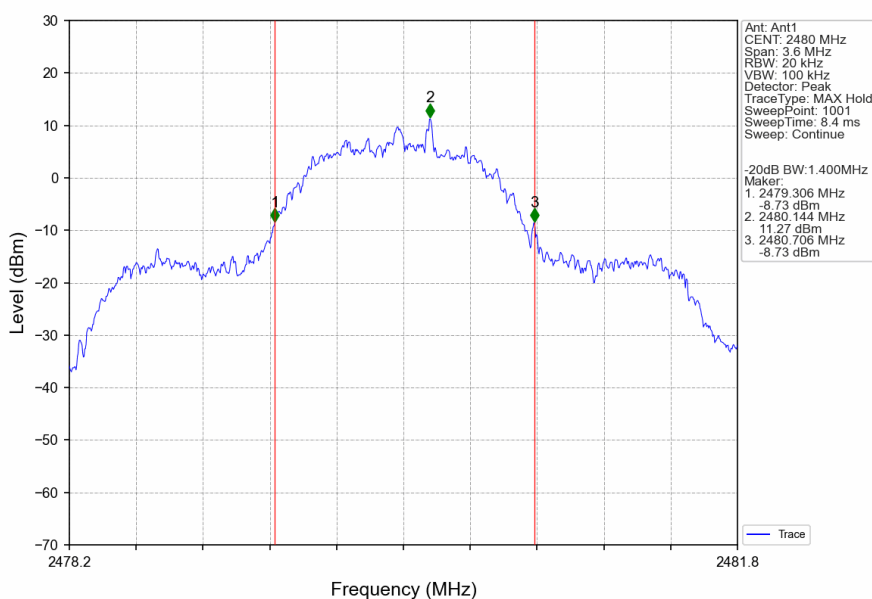

2. Maximum Conducted Output Power

2.1 Test Result

2.1.1 Power

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	14.09	<=30	Pass
		2441	DH5	14.36	<=30	Pass
		2480	DH5	14.55	<=30	Pass
Pi/4DQPSK	SISO	2402	2DH5	14.08	<=20.97	Pass
		2441	2DH5	14.65	<=20.97	Pass
		2480	2DH5	14.73	<=20.97	Pass
8DPSK	SISO	2402	3DH5	14.04	<=20.97	Pass
		2441	3DH5	14.62	<=20.97	Pass
		2480	3DH5	14.74	<=20.97	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch Competency Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

3. Carrier Frequency Separation


3.1 Test Result

3.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	0.998	0.939	≥ 0.939	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.001	1.436	≥ 0.957	Pass
8DPSK	SISO	HOPP	3DH5	1.001	1.419	≥ 0.946	Pass

3.2 Test Graph


3.2.1 Ant1

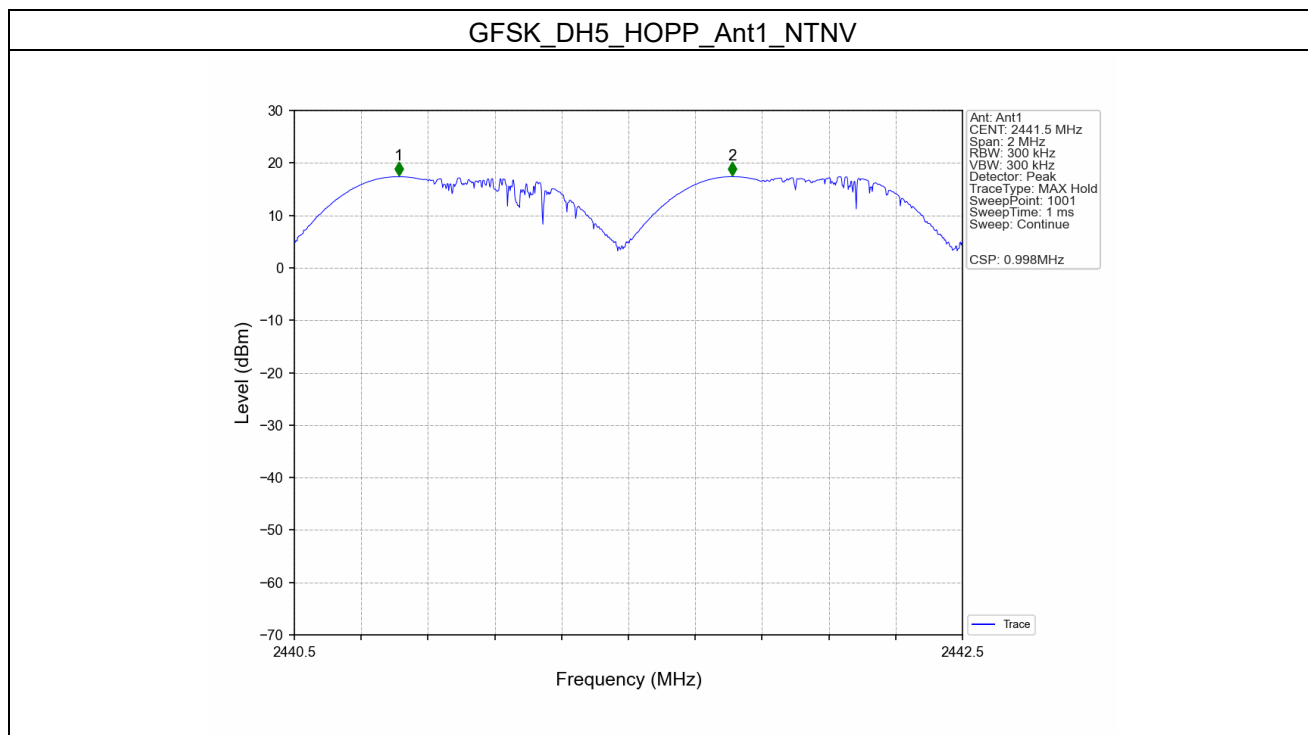

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

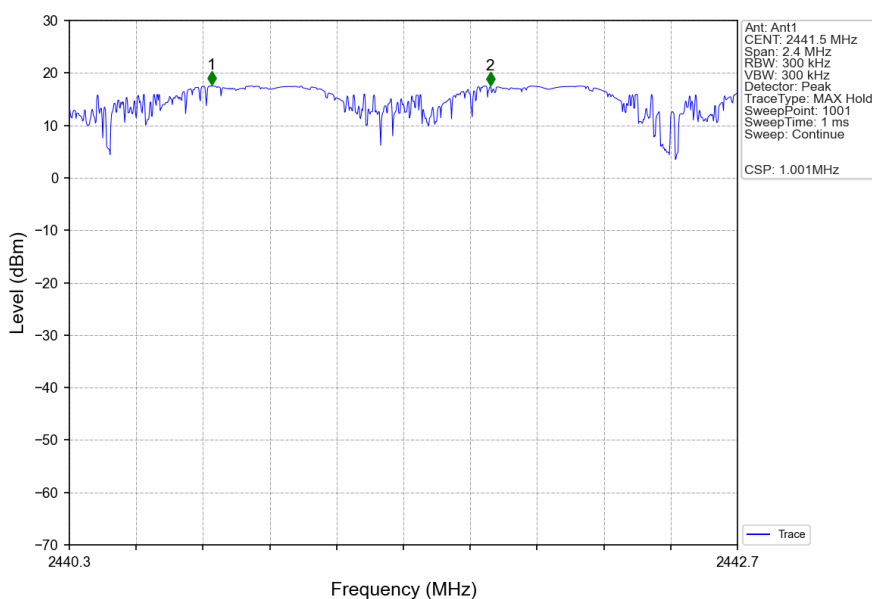

8DPSK_3DH5_HOPP_Ant1_NTNV

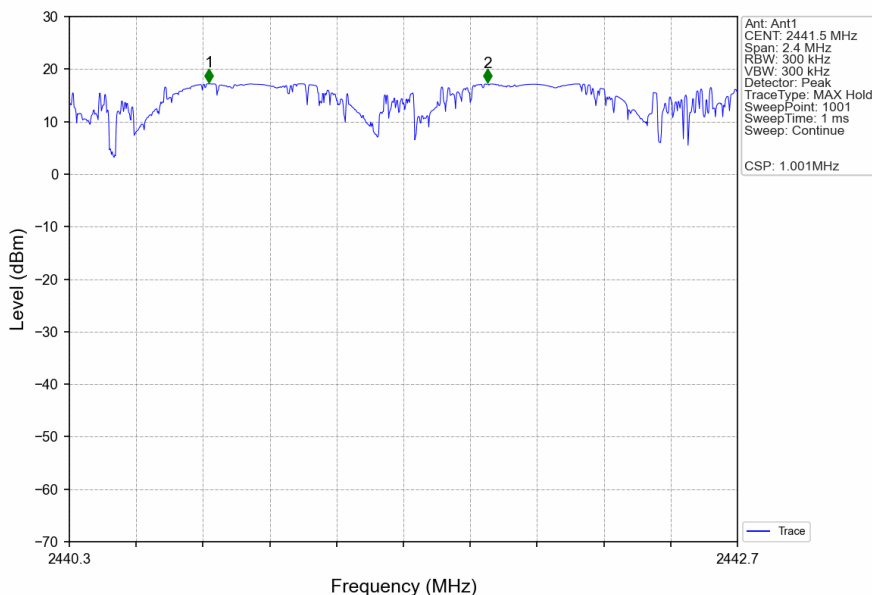

4. Number of Hopping Frequencies


4.1 Test Result

4.1.1 HoppNum


Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass
8DPSK	SISO	HOPP	3DH5	79	≥ 15	Pass

4.2 Test Graph


4.2.1 HoppNum

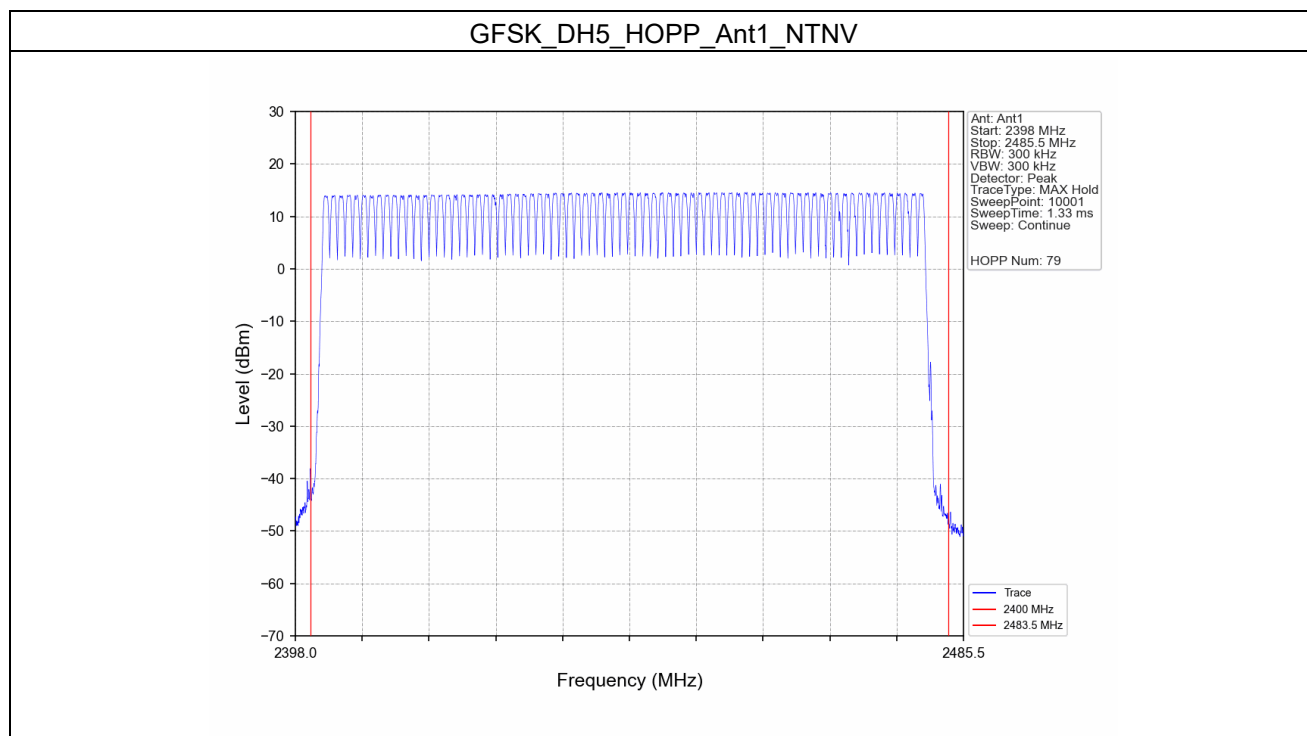

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

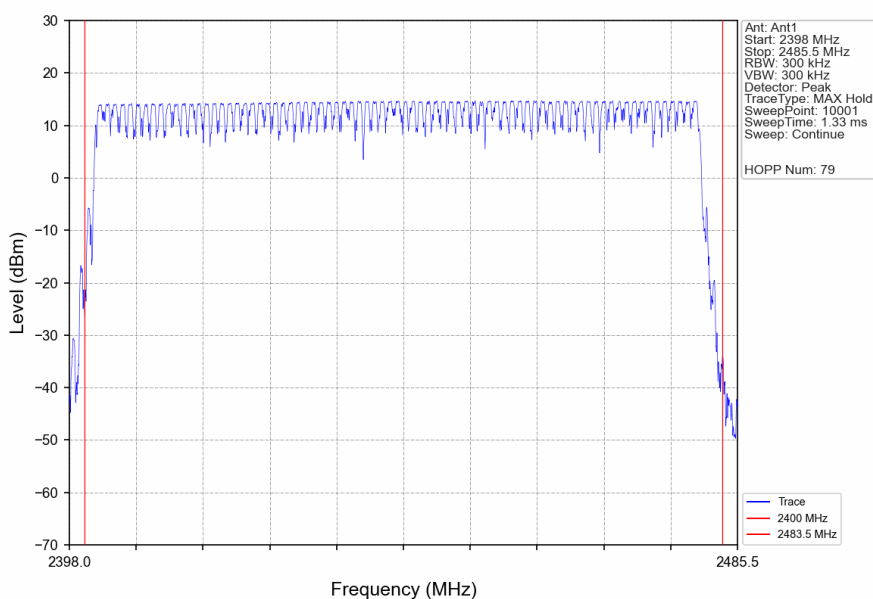

8DPSK_3DH5_HOPP_Ant1_NTNV

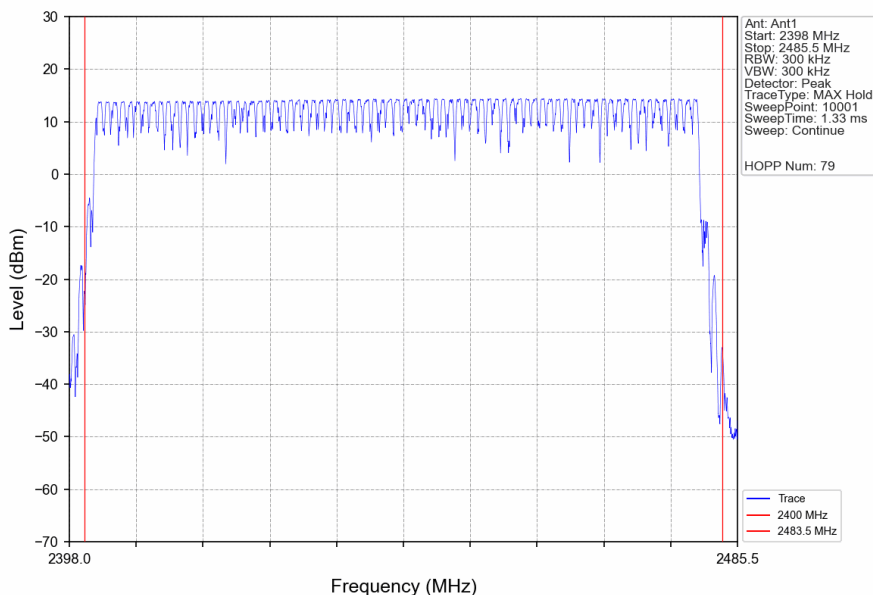

5. Time of Occupancy (Dwell Time)

5.1 Test Result


5.1.1 Ant1

Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	2.900	31.600	112	324.800	<=400	Pass
			DH3	2.902	31.600	105	304.710	<=400	Pass
			DH5	2.902	31.600	103	298.906	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	2.894	31.600	98	283.612	<=400	Pass
			2DH3	2.894	31.600	94	272.036	<=400	Pass
			2DH5	2.906	31.600	117	340.002	<=400	Pass
8DPSK	SISO	HOPP	3DH1	2.906	31.600	110	319.660	<=400	Pass
			3DH3	2.896	31.600	110	318.560	<=400	Pass
			3DH5	2.906	31.600	108	313.848	<=400	Pass




5.2 Test Graph


5.2.1 Ant1

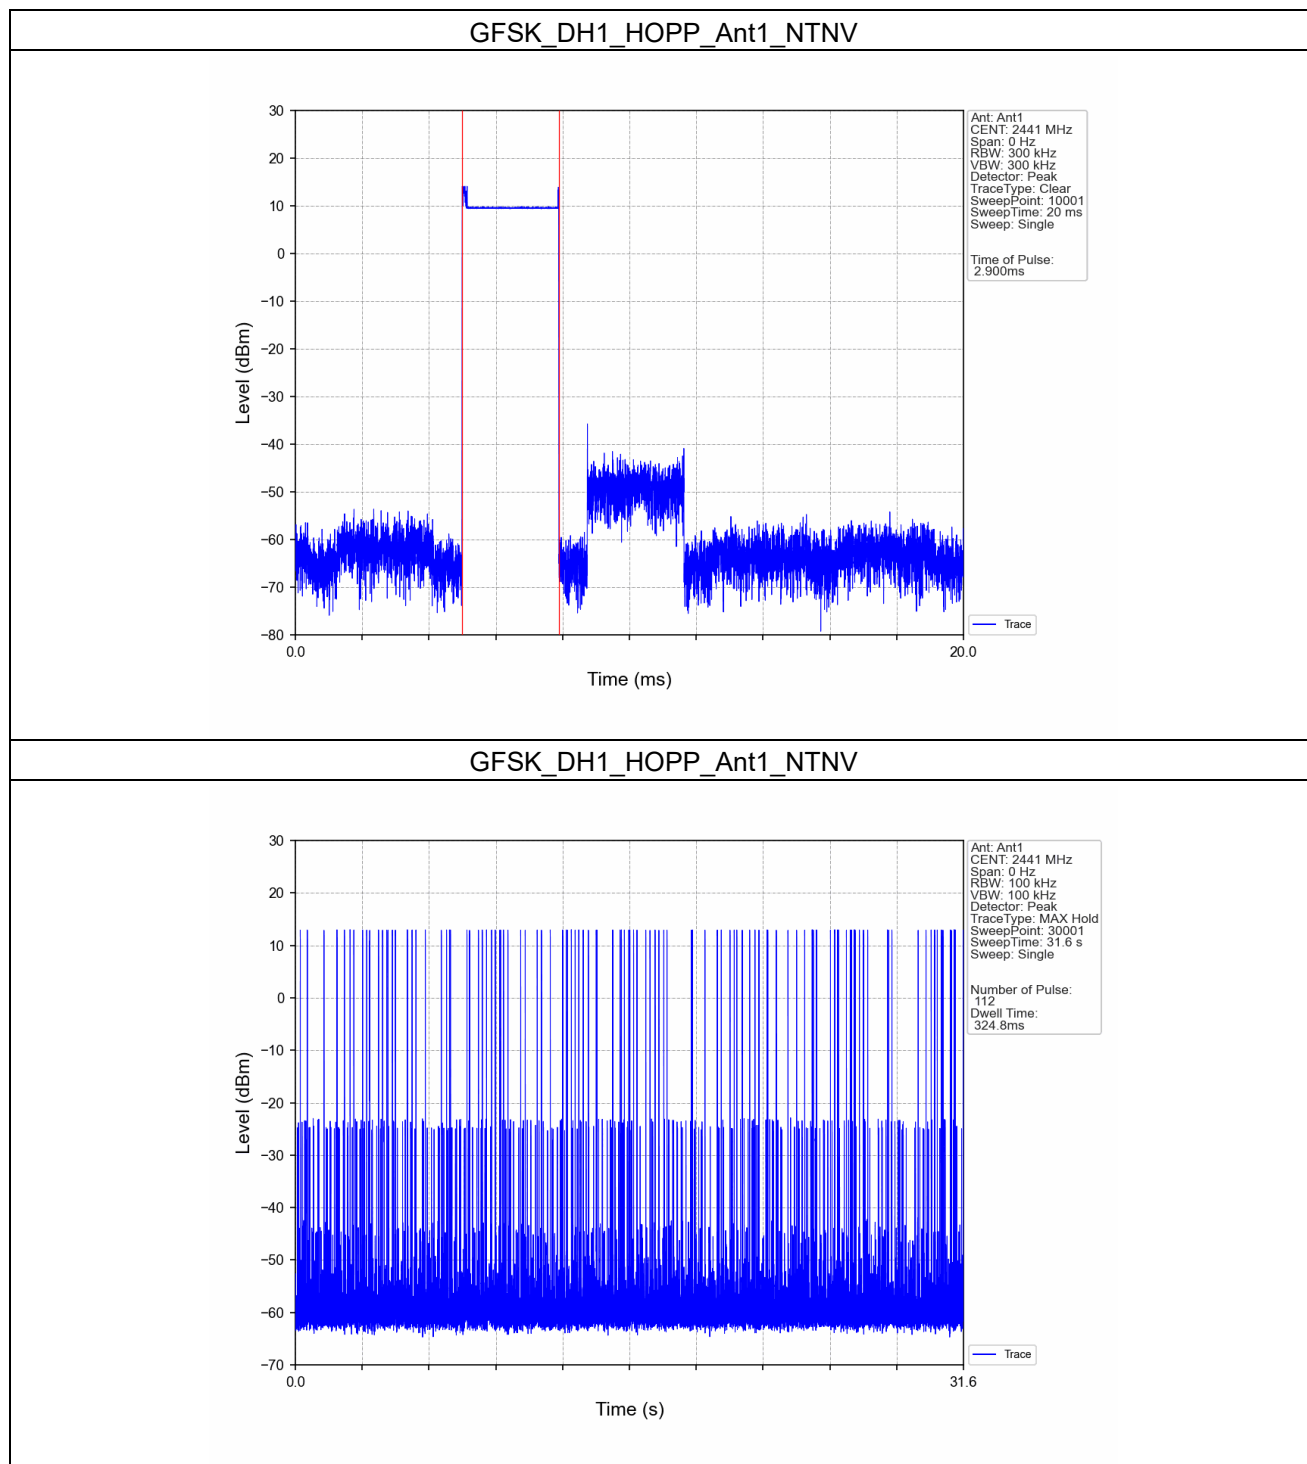


GFSK_DH3_HOPP_Ant1_NTNV

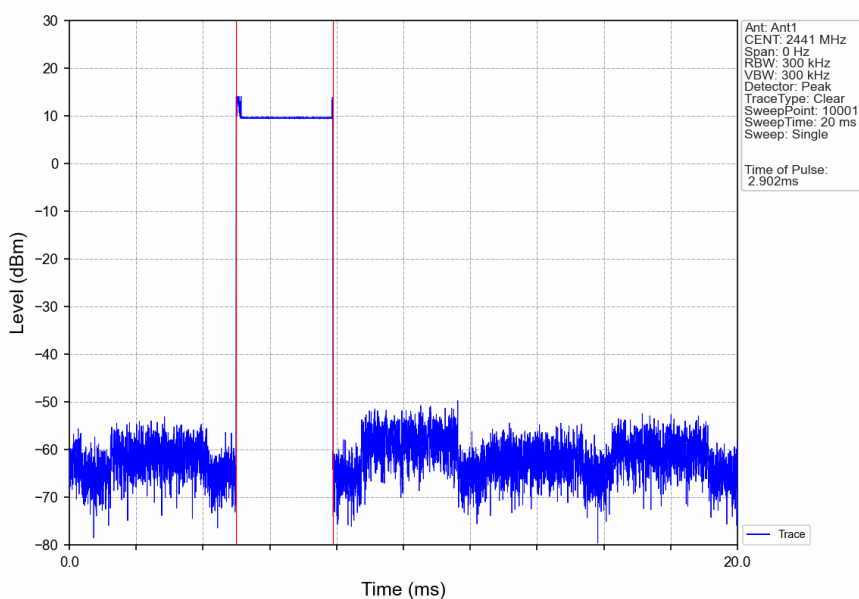


GFSK_DH3_HOPP_Ant1_NTNV

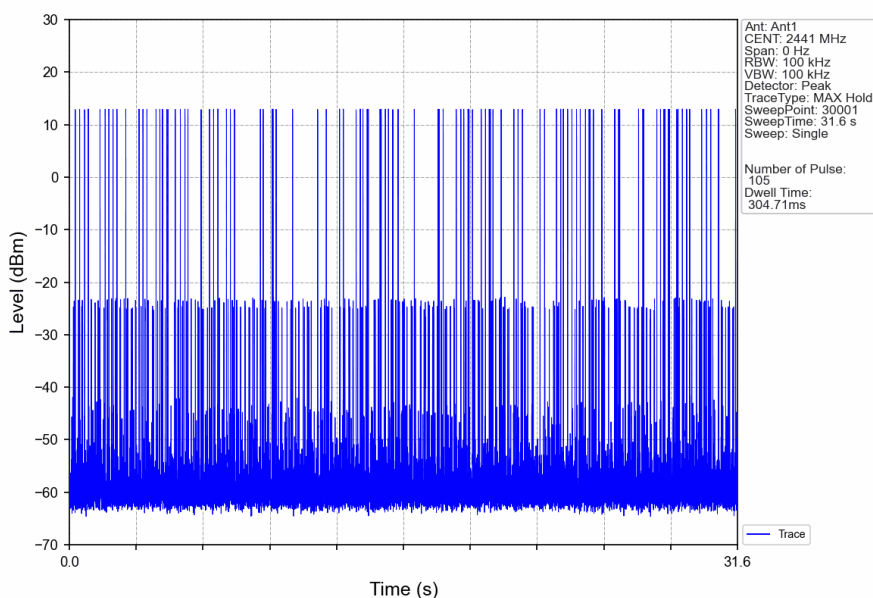


GFSK_DH5_HOPP_Ant1_NTNV

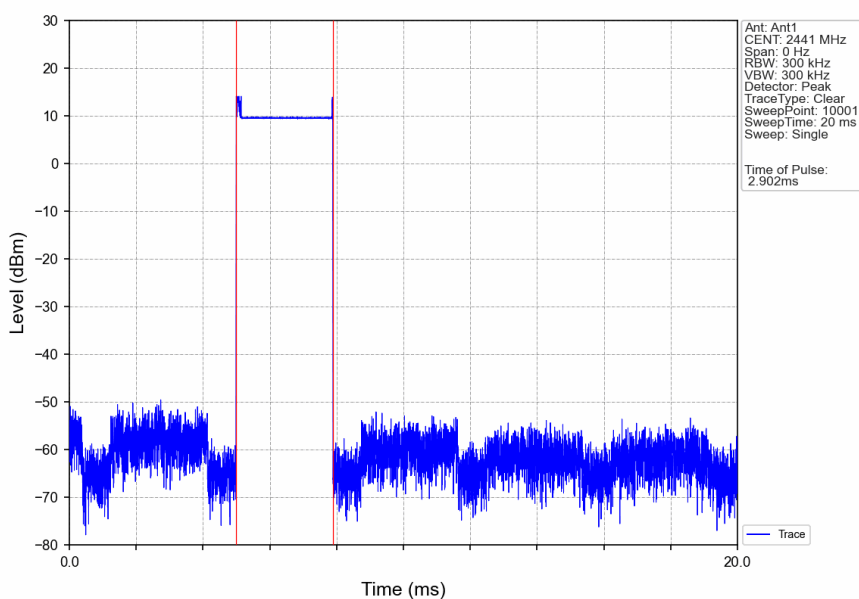


GFSK_DH5_HOPP_Ant1_NTNV

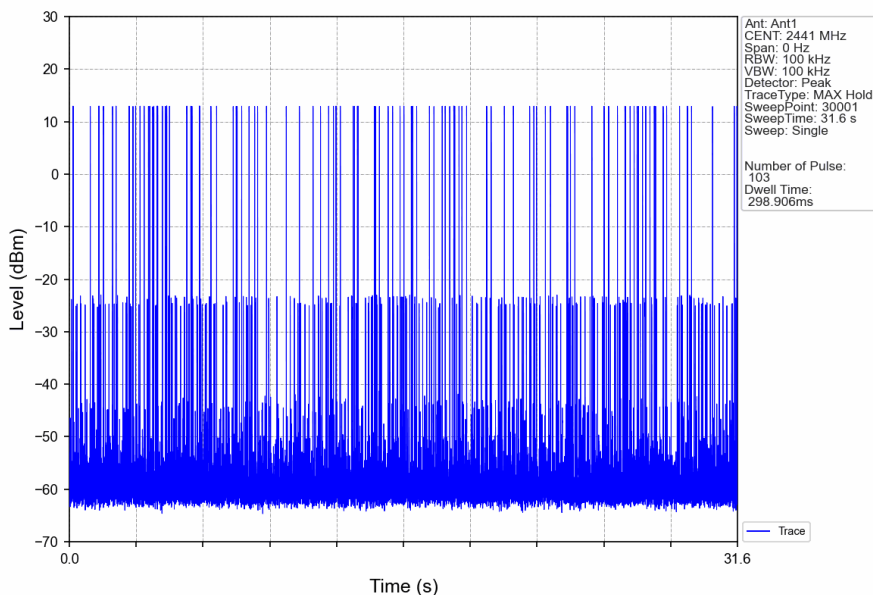


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

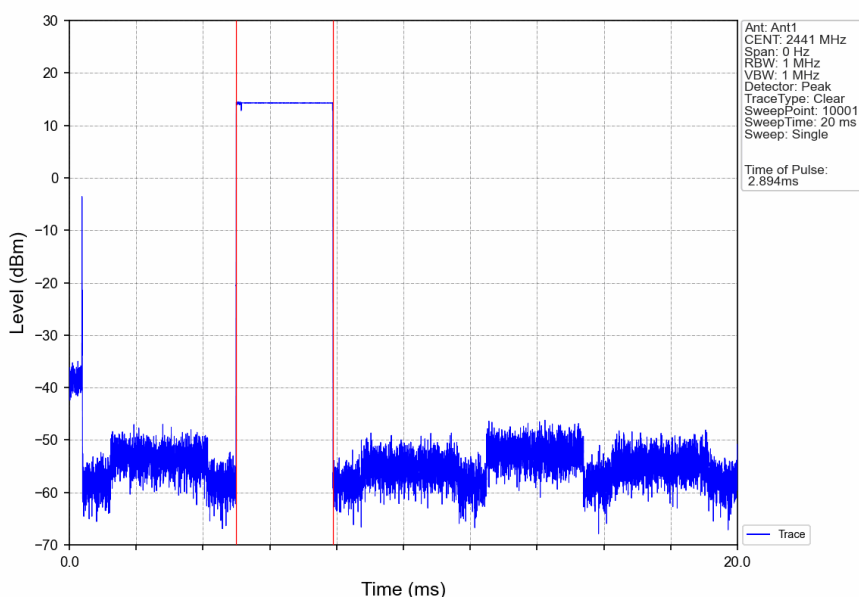


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

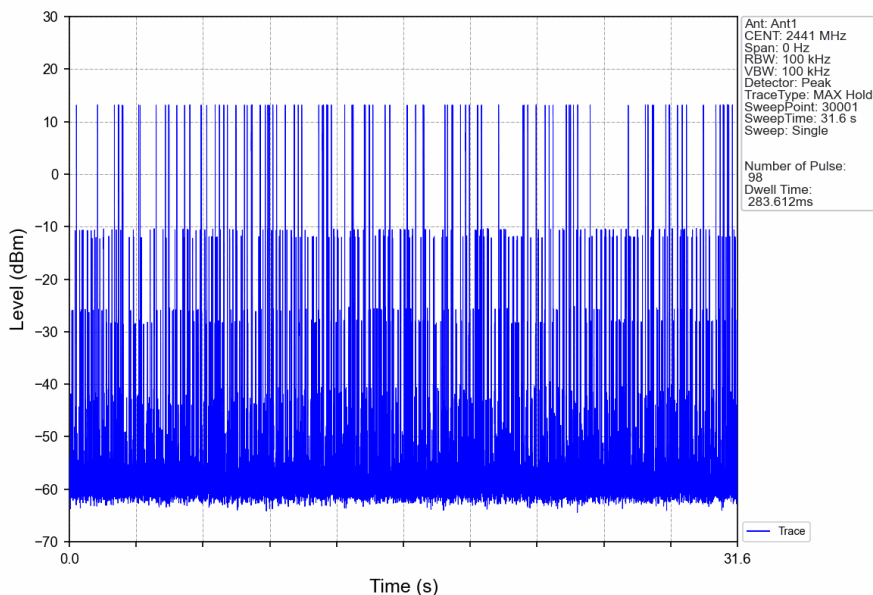


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

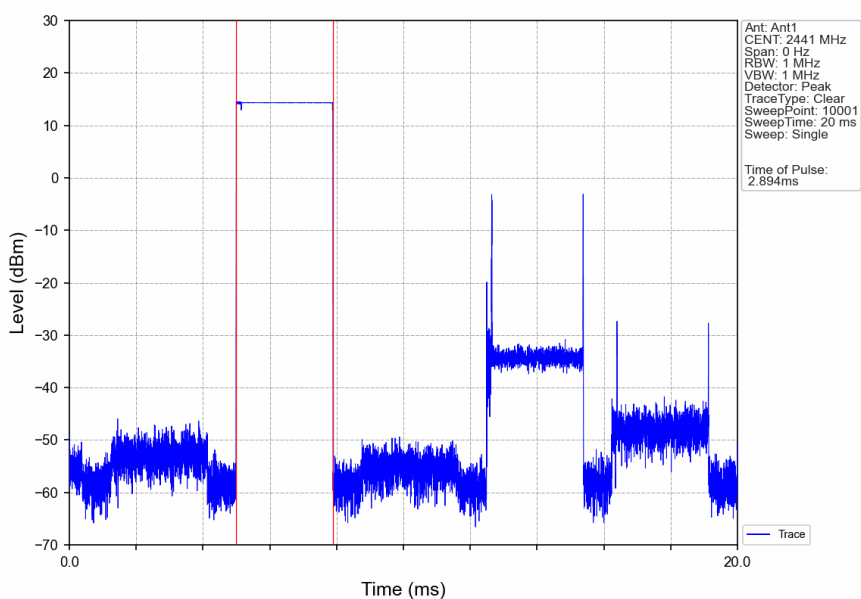


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

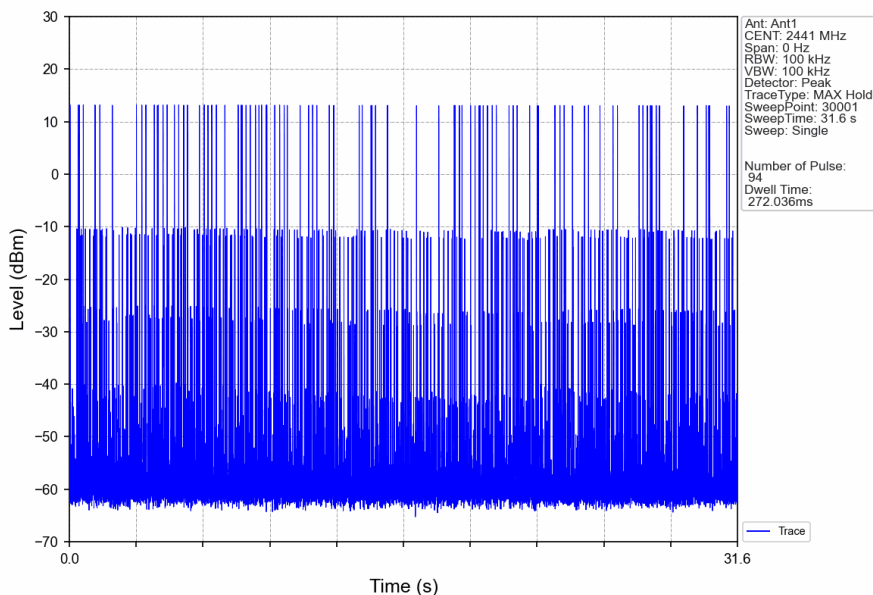


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

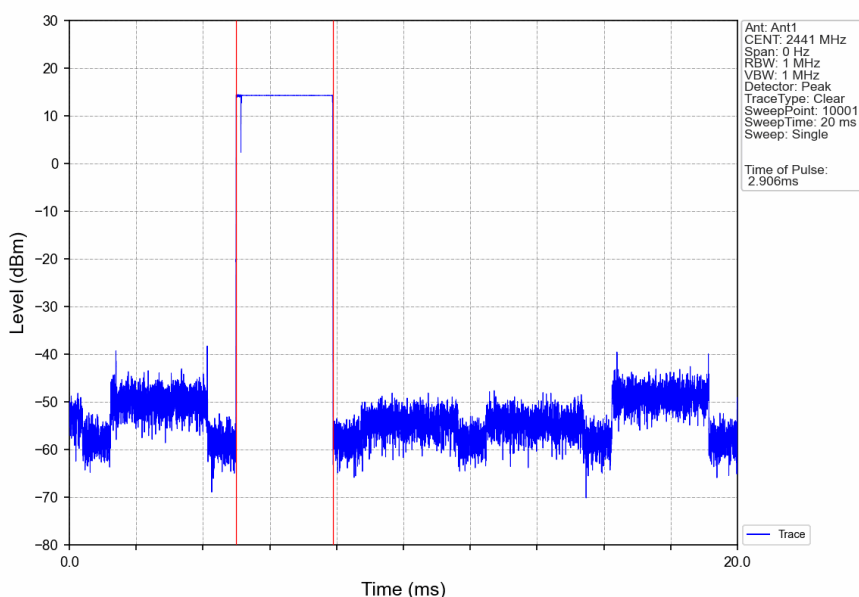


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

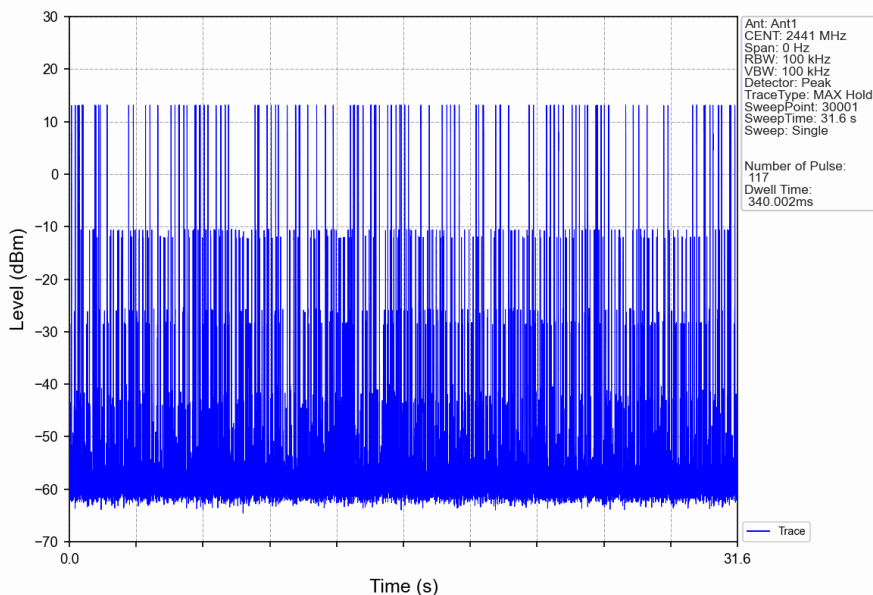


8DPSK_3DH1_HOPP_Ant1_NTNV

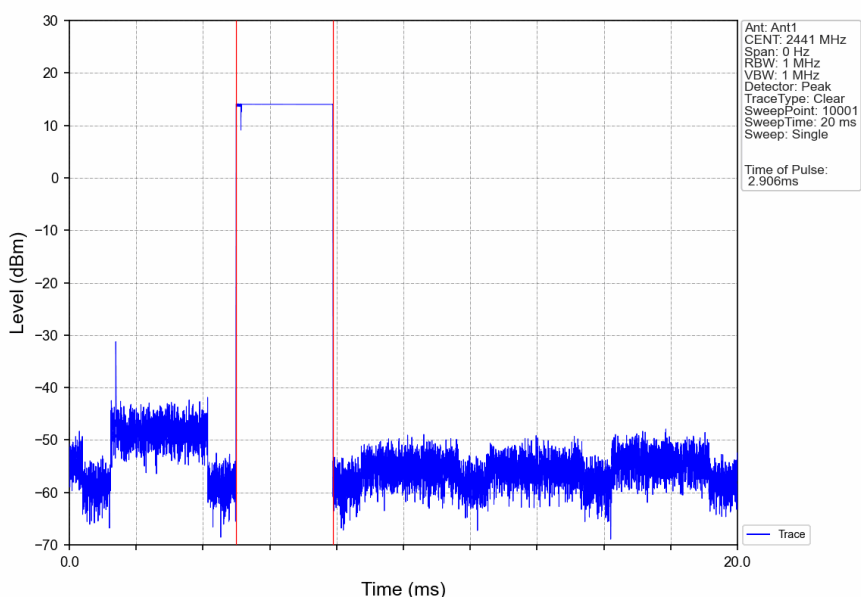


8DPSK_3DH1_HOPP_Ant1_NTNV

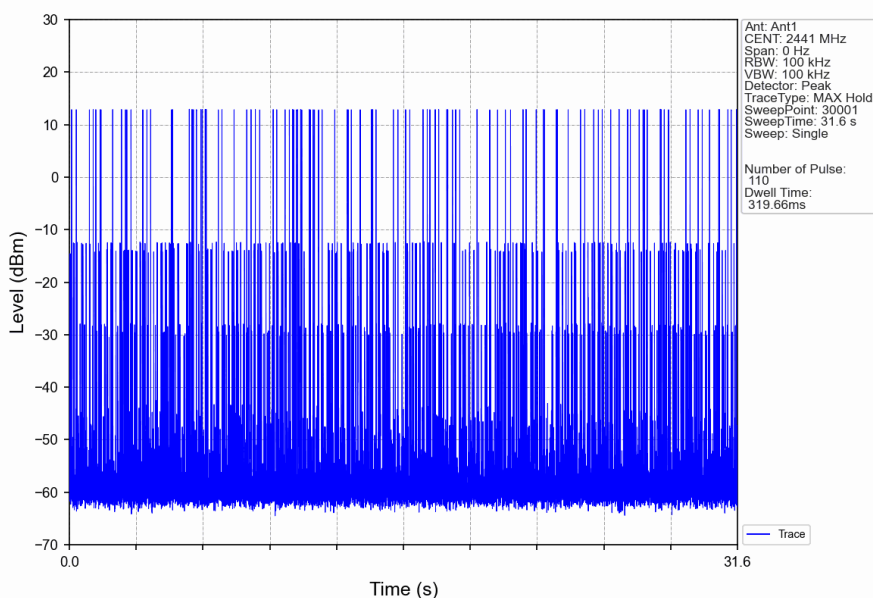


8DPSK_3DH3_HOPP_Ant1_NTNV

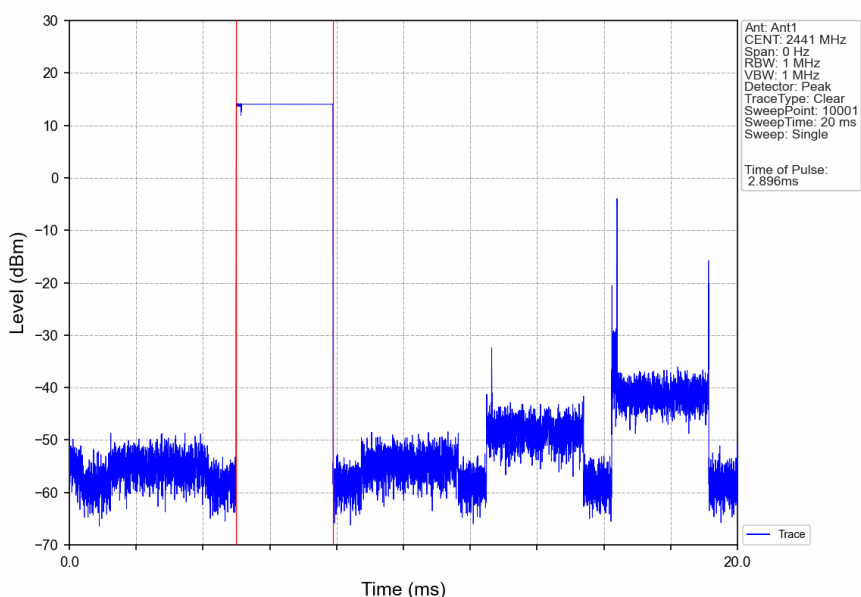


8DPSK_3DH3_HOPP_Ant1_NTNV

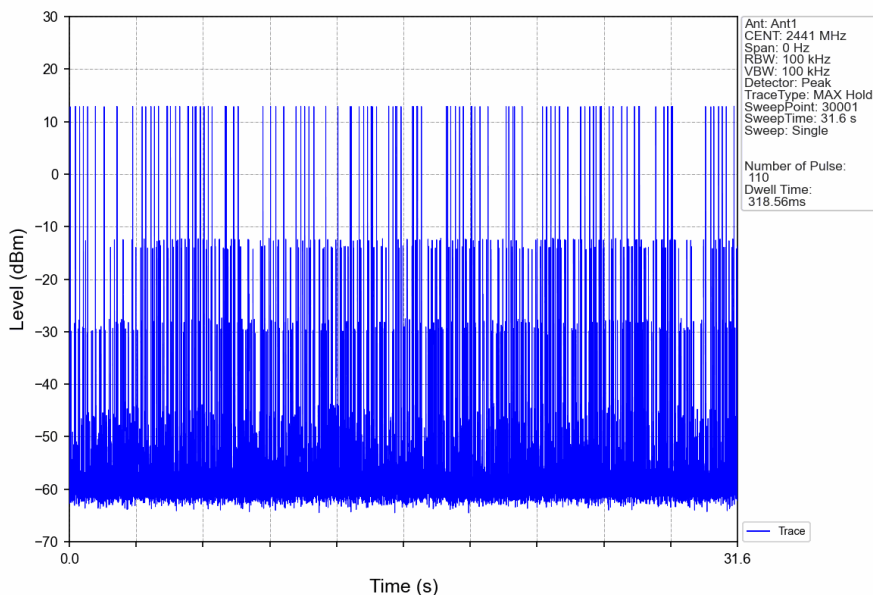

8DPSK_3DH5_HOPP_Ant1_NTNV

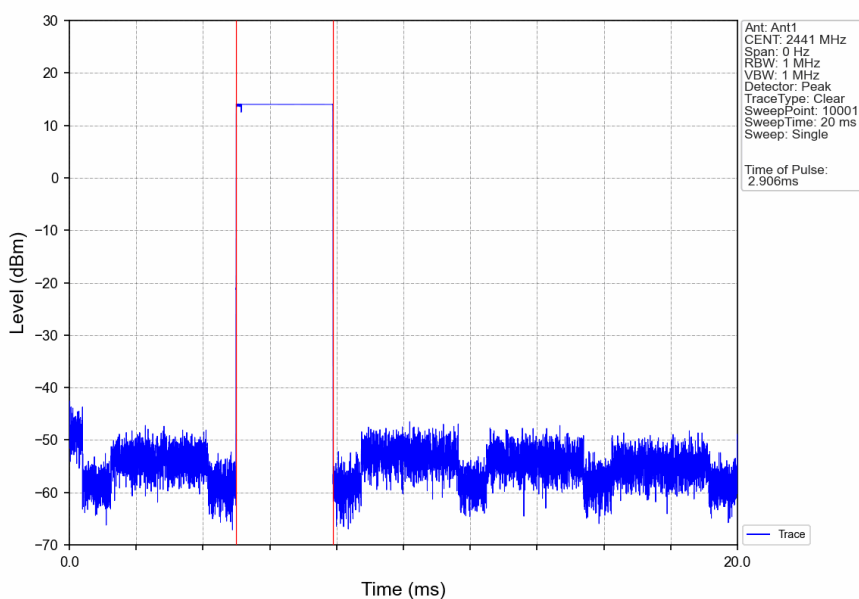

8DPSK_3DH5_HOPP_Ant1_NTNV

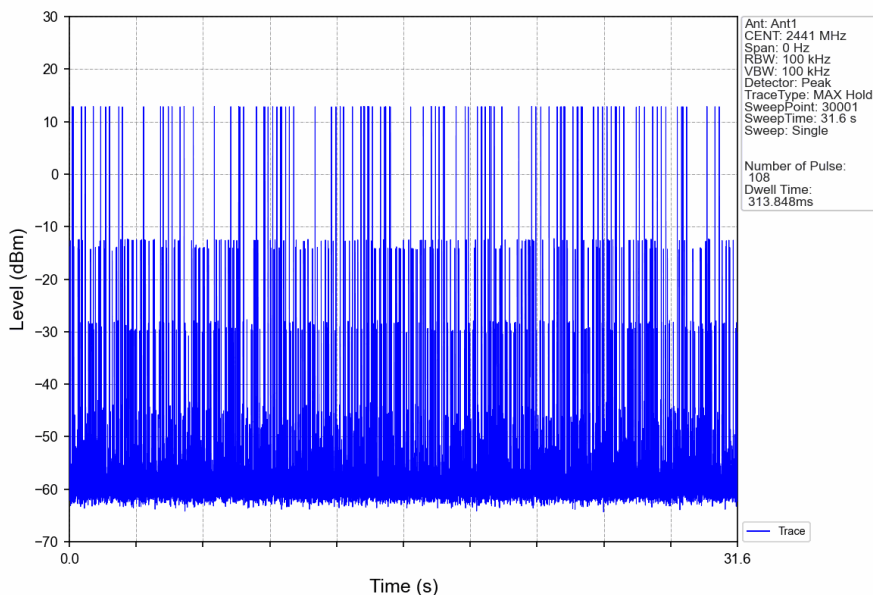

6. Unwanted Emissions In Non-restricted Frequency Bands

6.1 Test Result

6.1.1 Ref


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	14.11
		2441	DH5	1	14.37
		2480	DH5	1	14.42
Pi/4DQPSK	SISO	2402	2DH5	1	13.82
		2441	2DH5	1	14.36
		2480	2DH5	1	14.43
8DPSK	SISO	2402	3DH5	1	13.89
		2441	3DH5	1	14.42
		2480	3DH5	1	14.21

6.1.2 CSE and Band edge


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	14.42	-5.58	Pass
		2441	DH5	1	14.42	-5.58	Pass
		2480	DH5	1	14.42	-5.58	Pass
		HOPP	DH5	1	14.42	-5.58	Pass
					14.42	-5.58	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	14.43	-5.57	Pass
		2441	2DH5	1	14.43	-5.57	Pass
		2480	2DH5	1	14.43	-5.57	Pass
		HOPP	2DH5	1	14.43	-5.57	Pass
					14.43	-5.57	Pass
8DPSK	SISO	2402	3DH5	1	14.42	-5.58	Pass
		2441	3DH5	1	14.42	-5.58	Pass
		2480	3DH5	1	14.42	-5.58	Pass
		HOPP	3DH5	1	14.42	-5.58	Pass
					14.42	-5.58	Pass

6.2 Test Graph


6.2.1 Ref

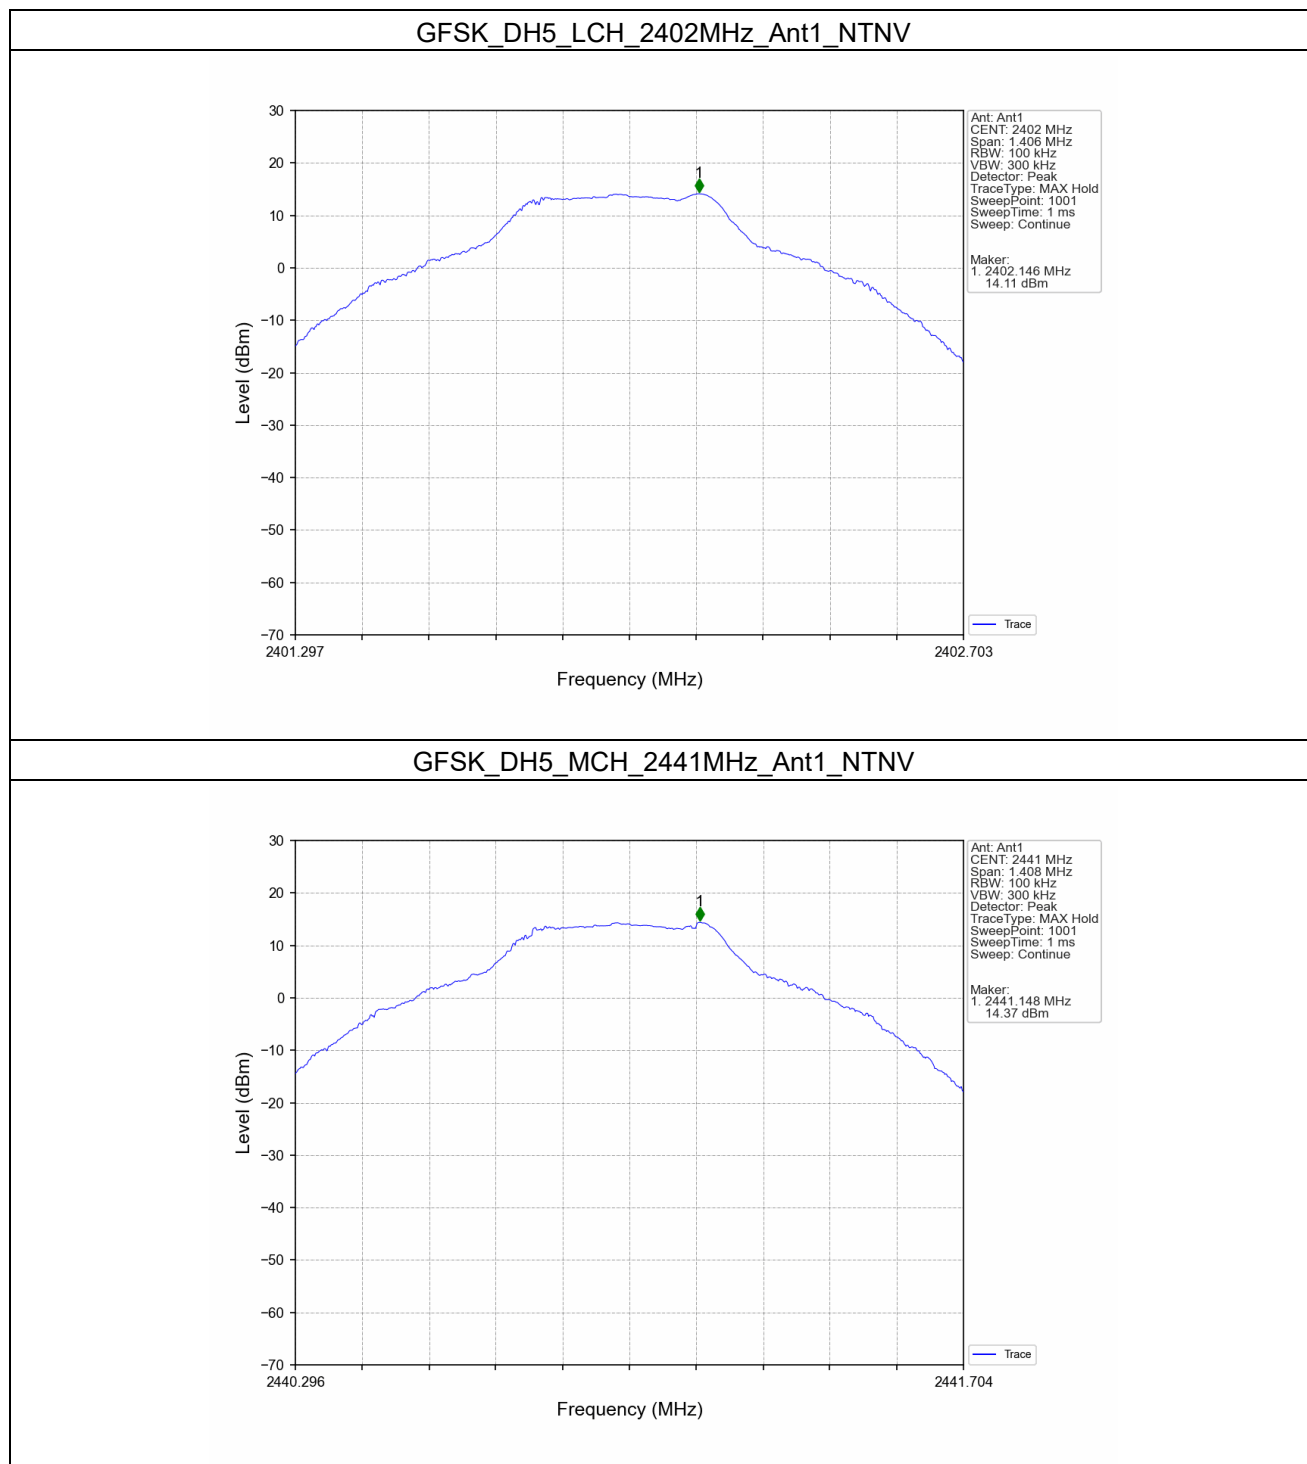


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

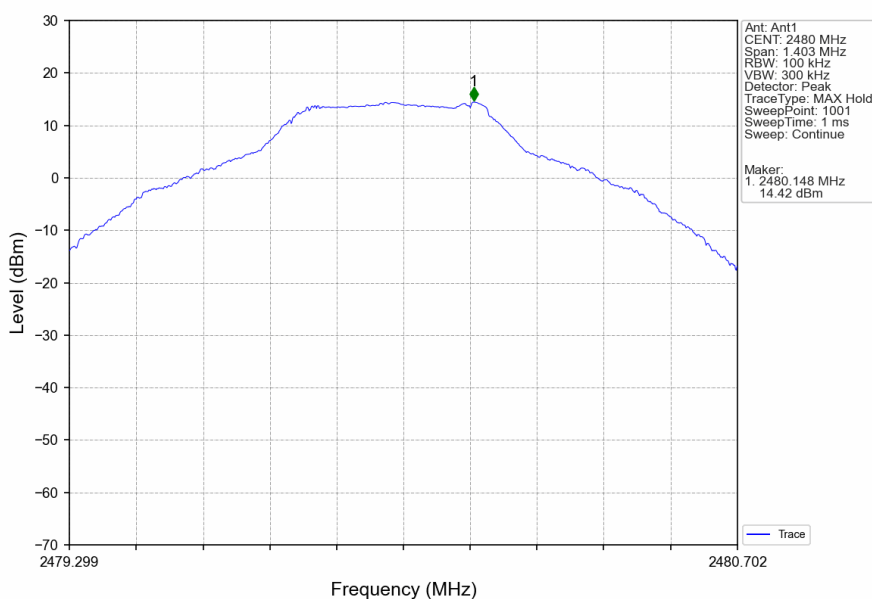


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

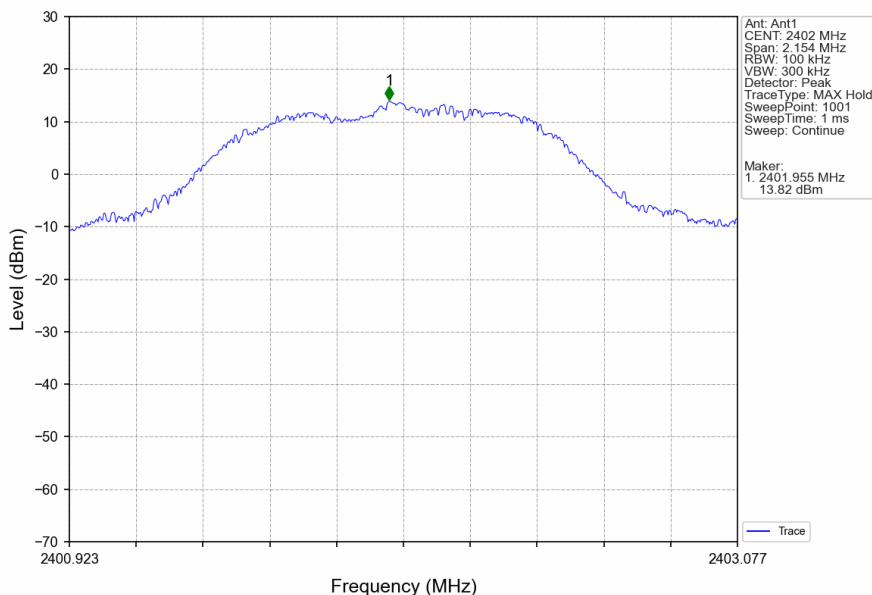


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

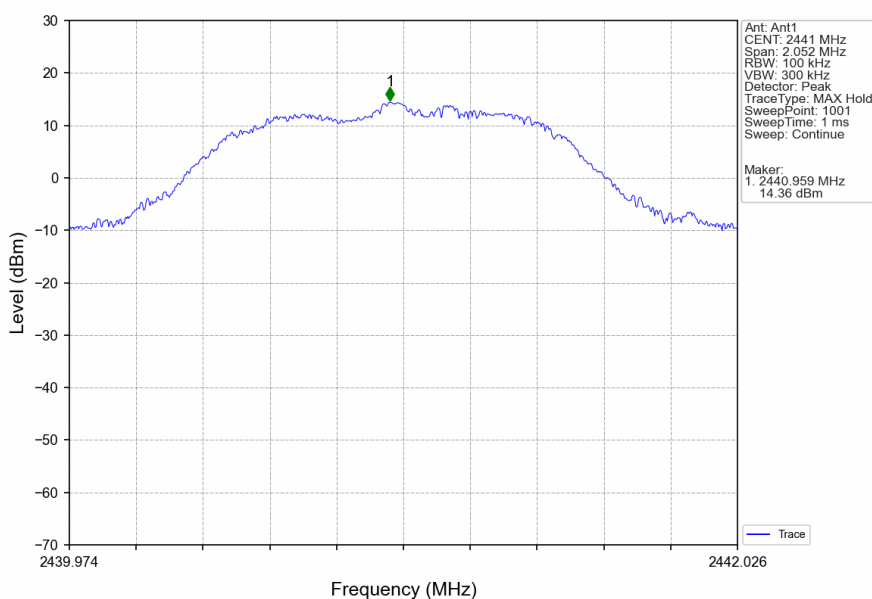


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

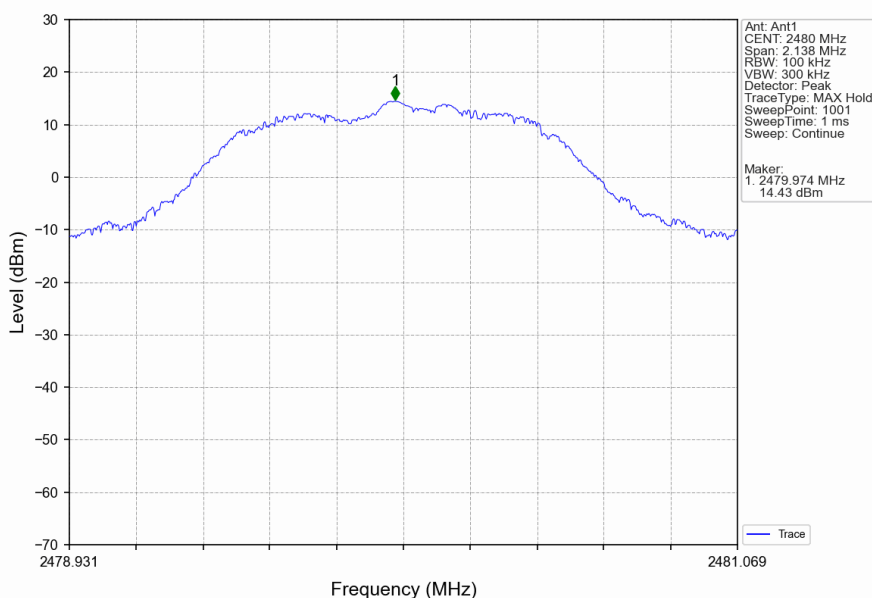


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

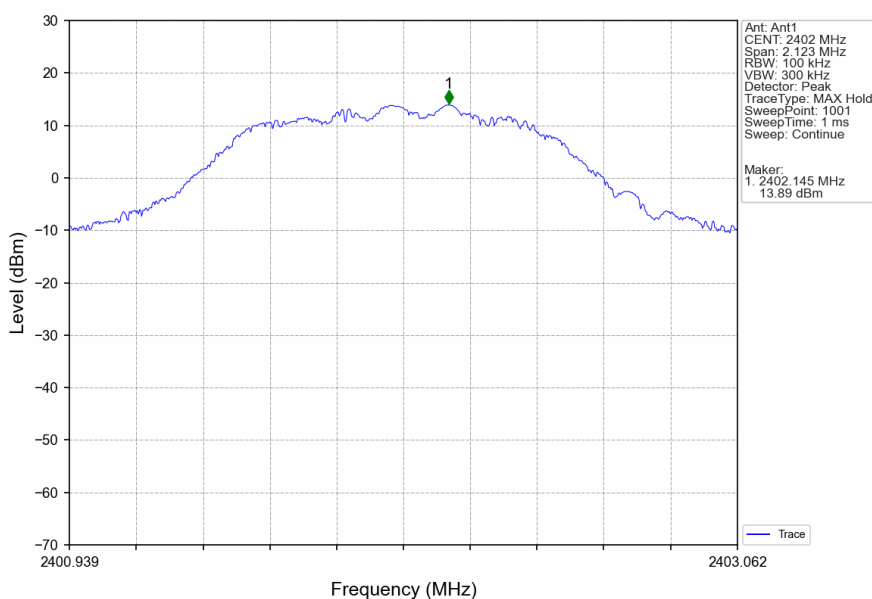


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

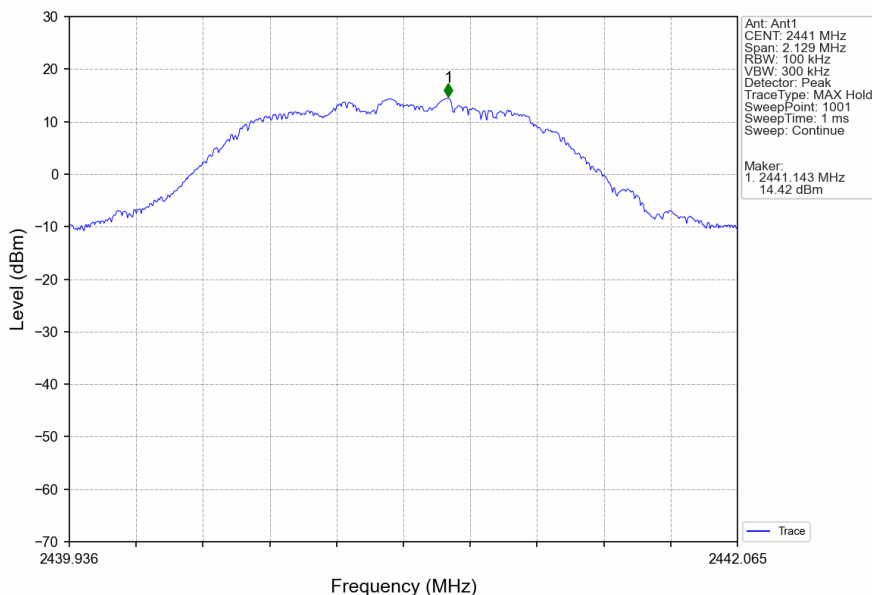


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

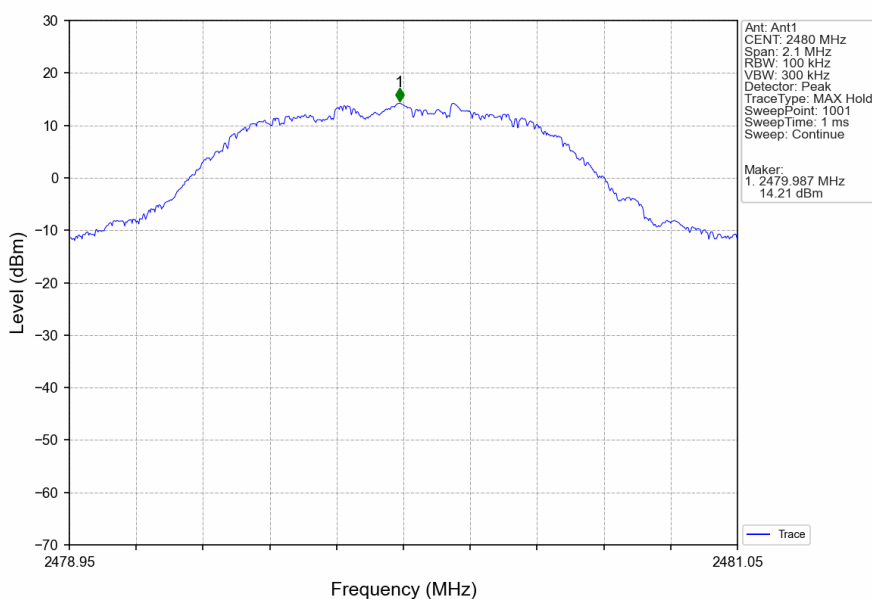


6.2.2 CSE and Band edge

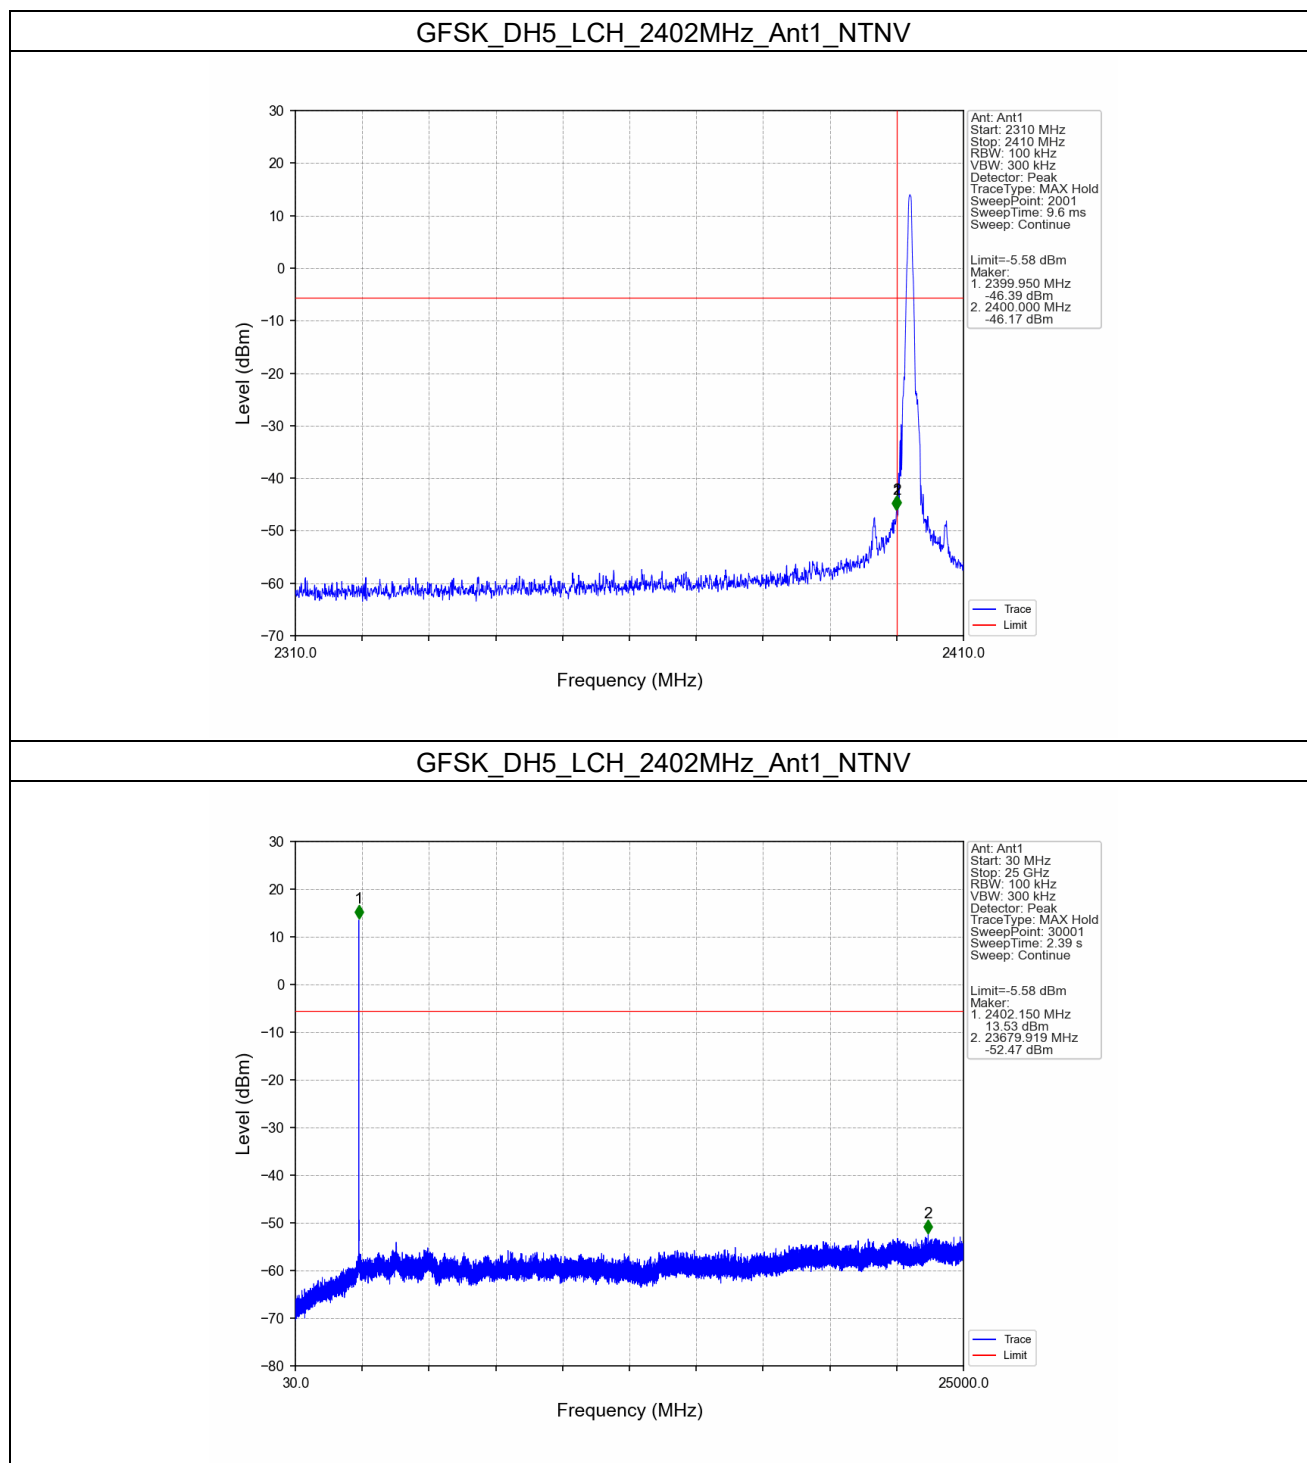


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

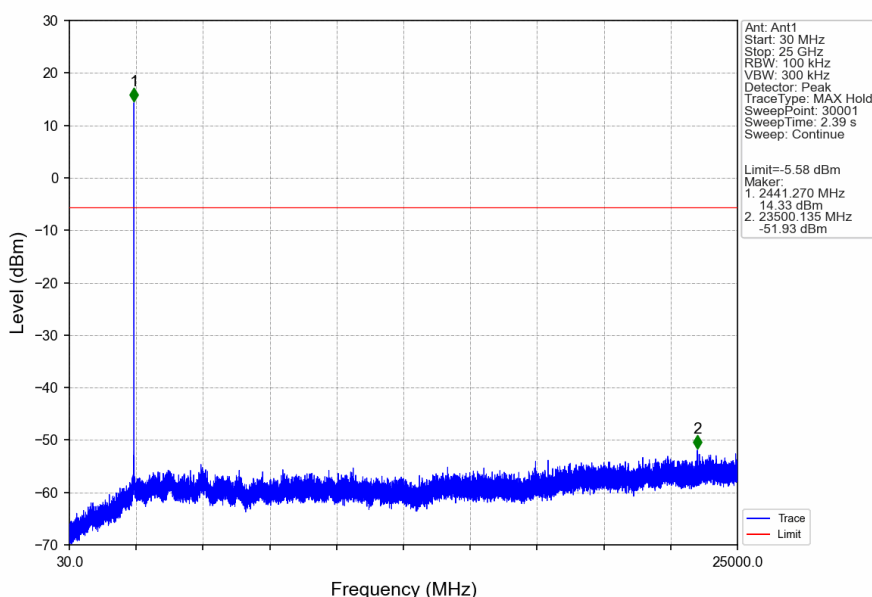


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

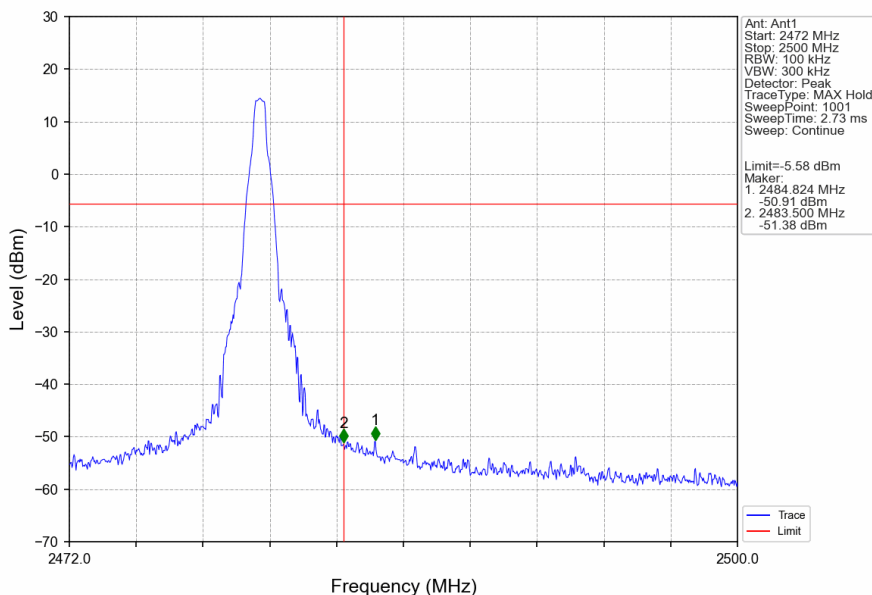


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

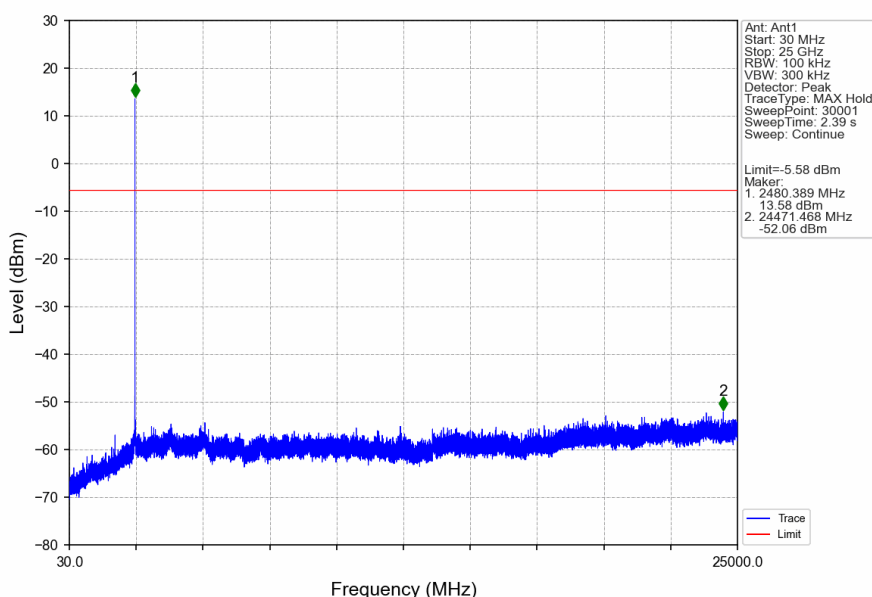


GFSK_DH5_HOPP_2400MHz_Ant1_NTNV

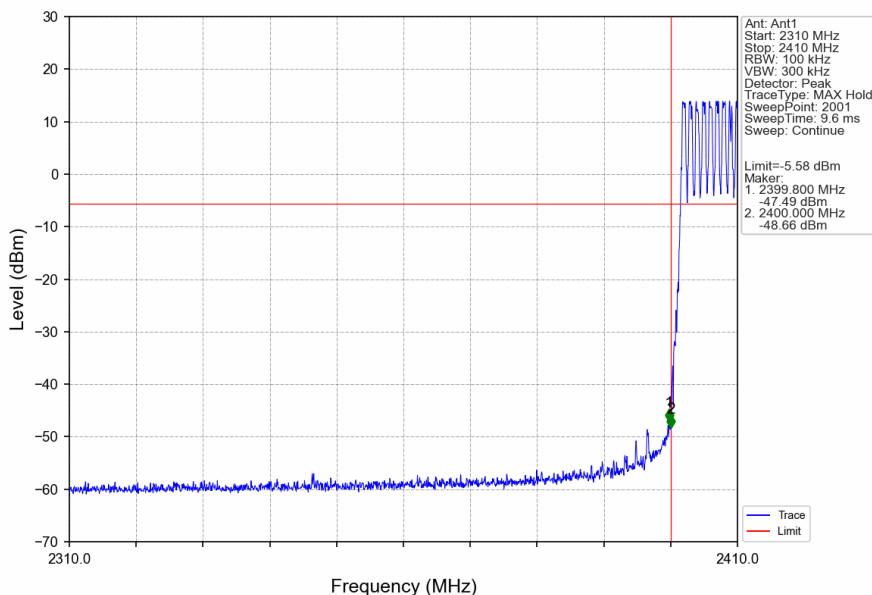


GFSK_DH5_HOPP_Ant1_NTNV

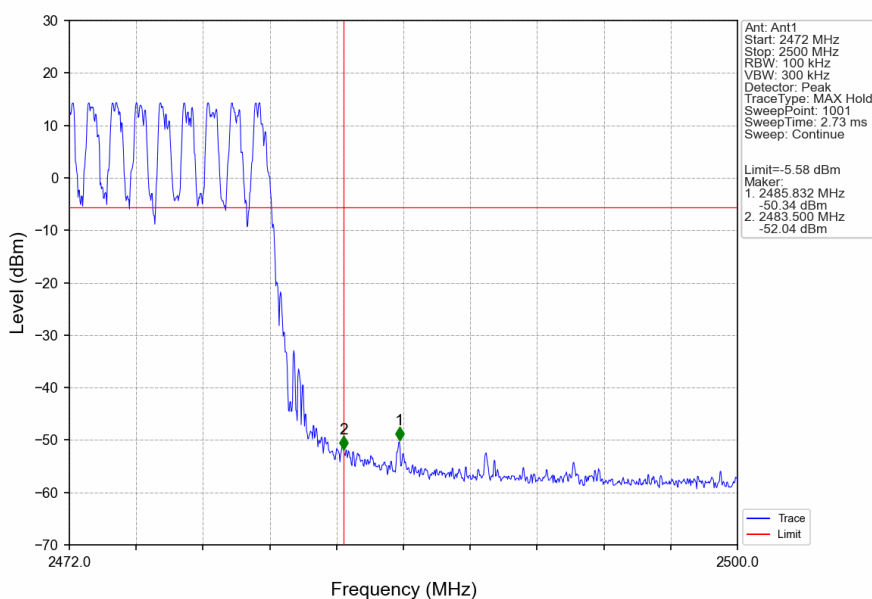


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

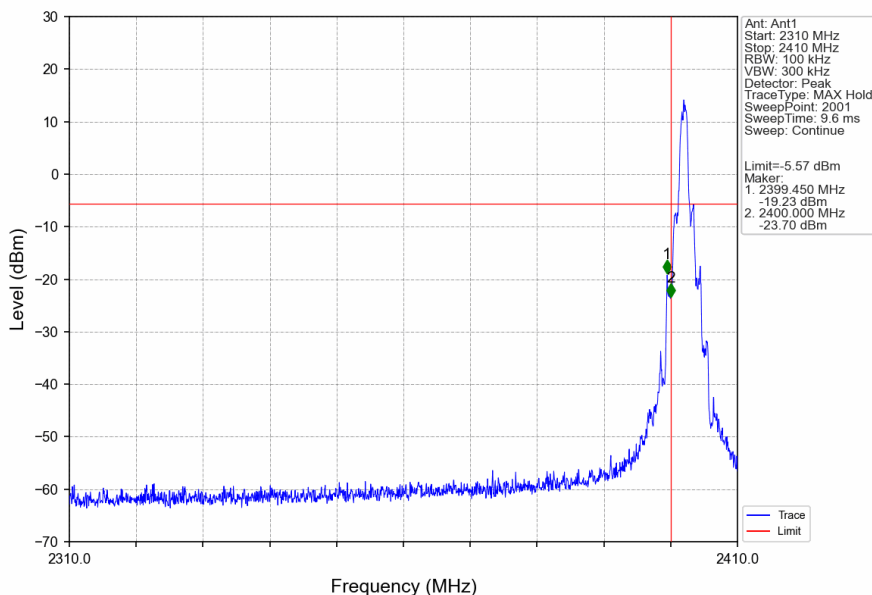


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

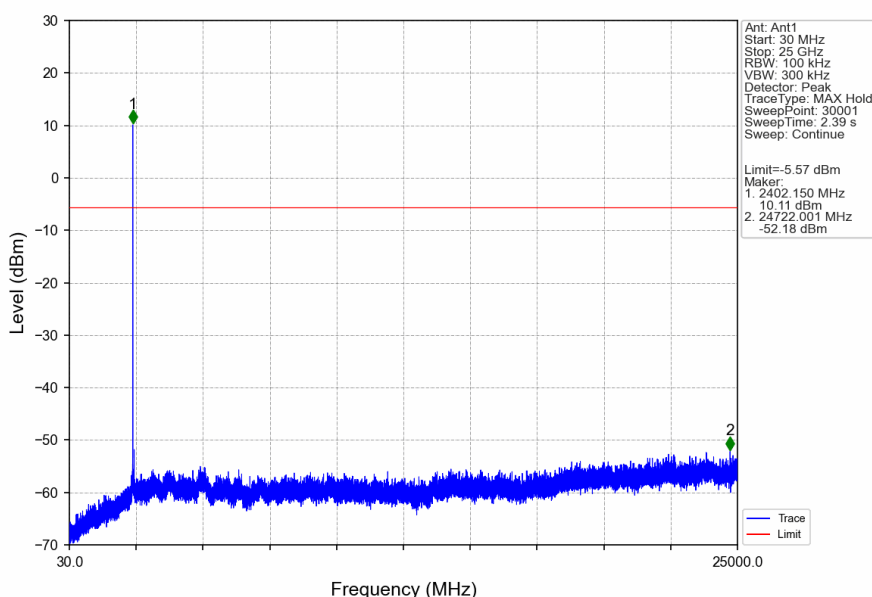


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

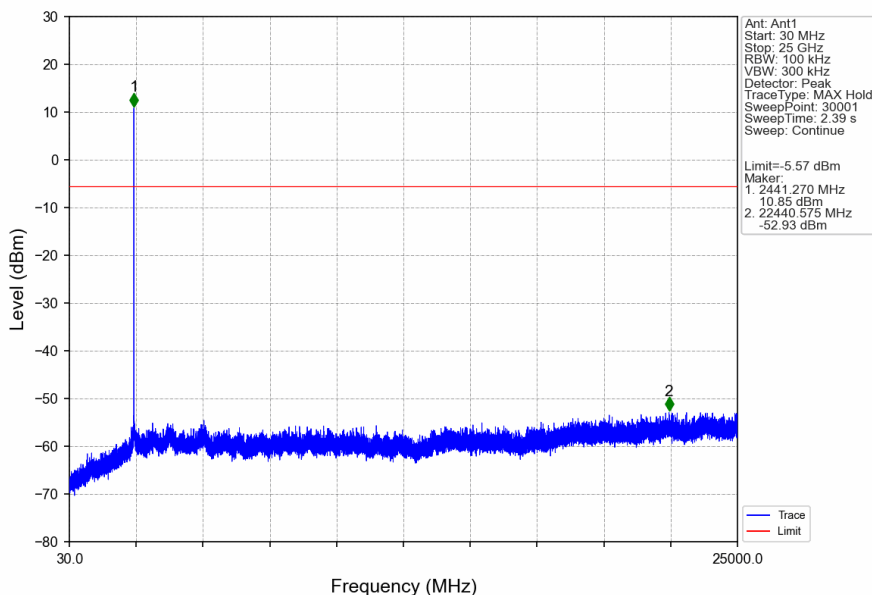


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

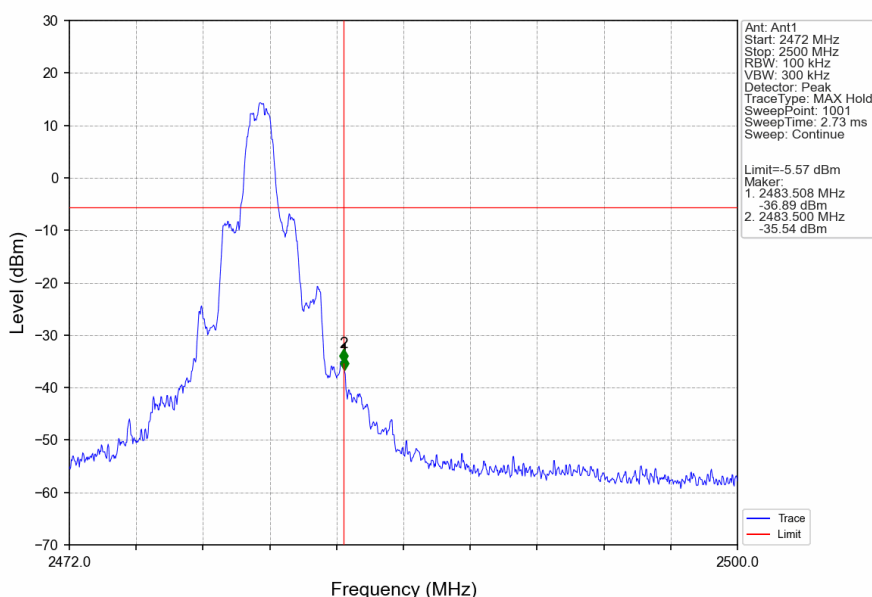


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

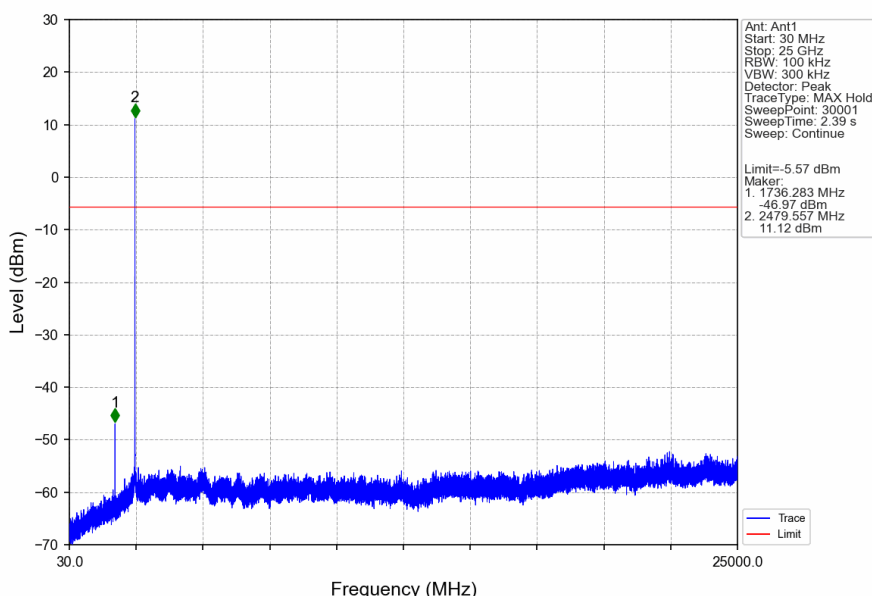


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

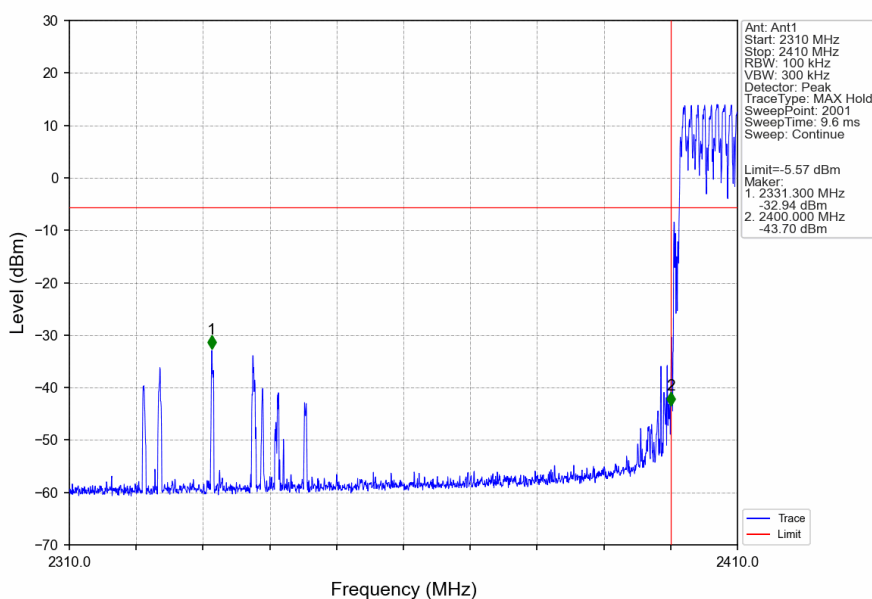


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

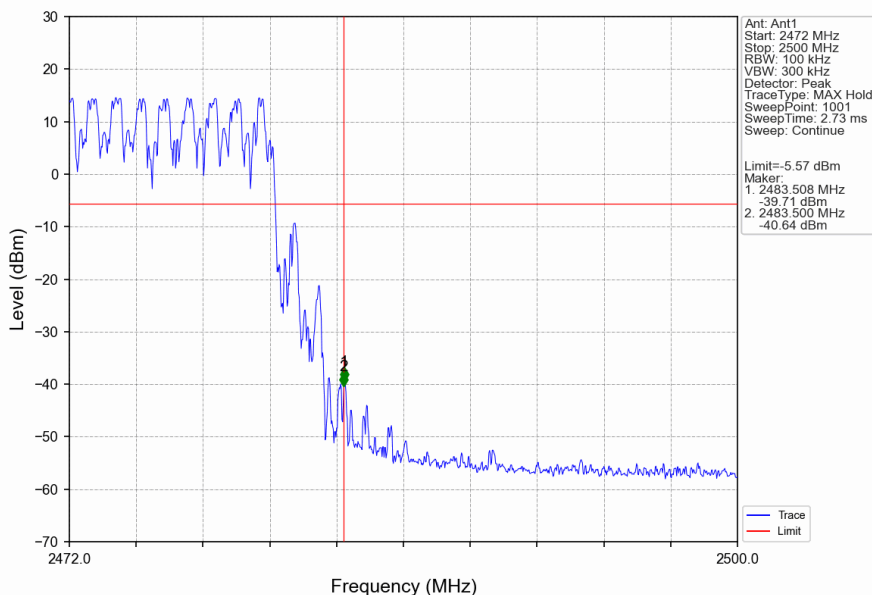


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

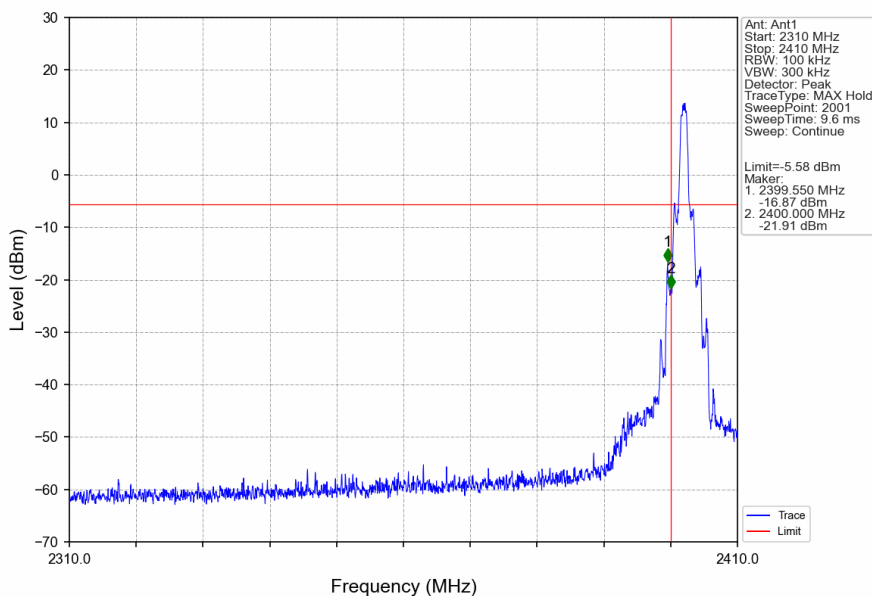


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

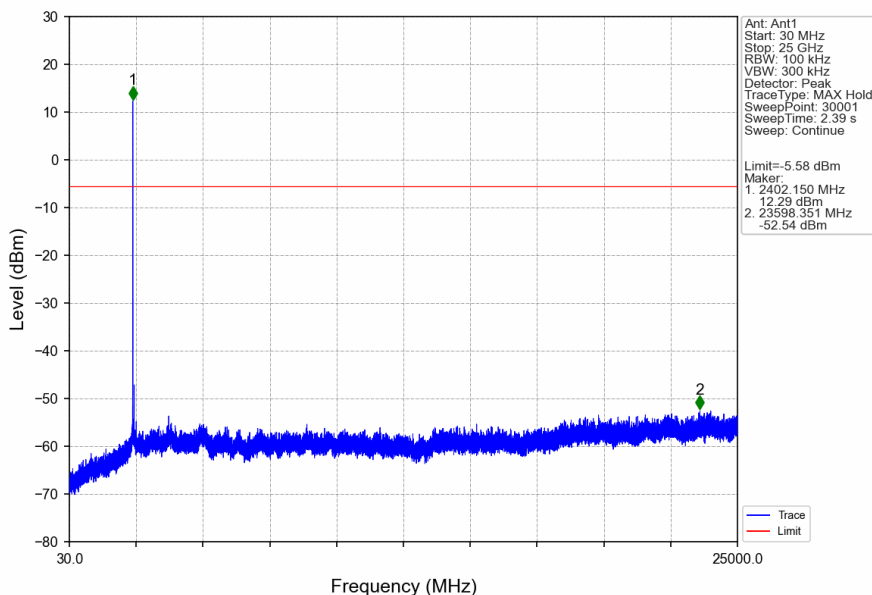


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

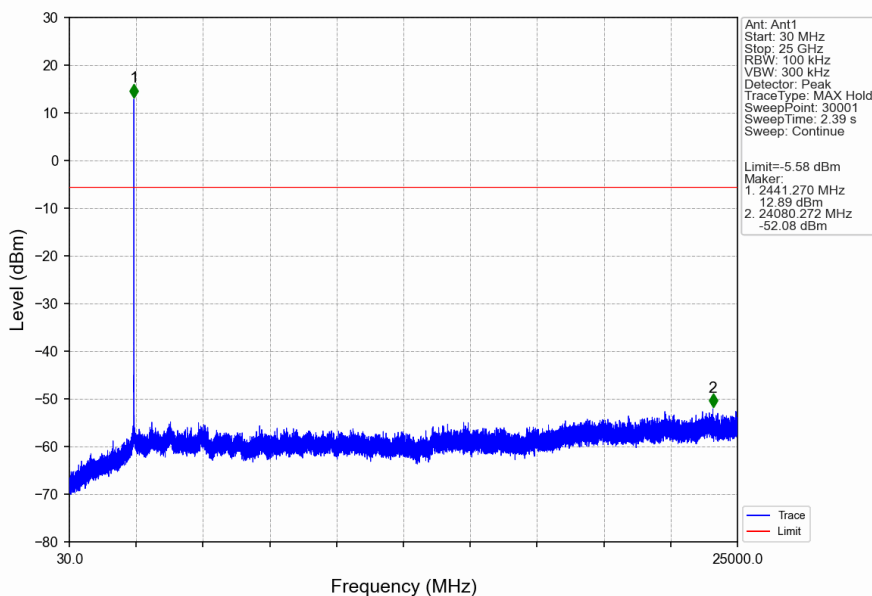


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

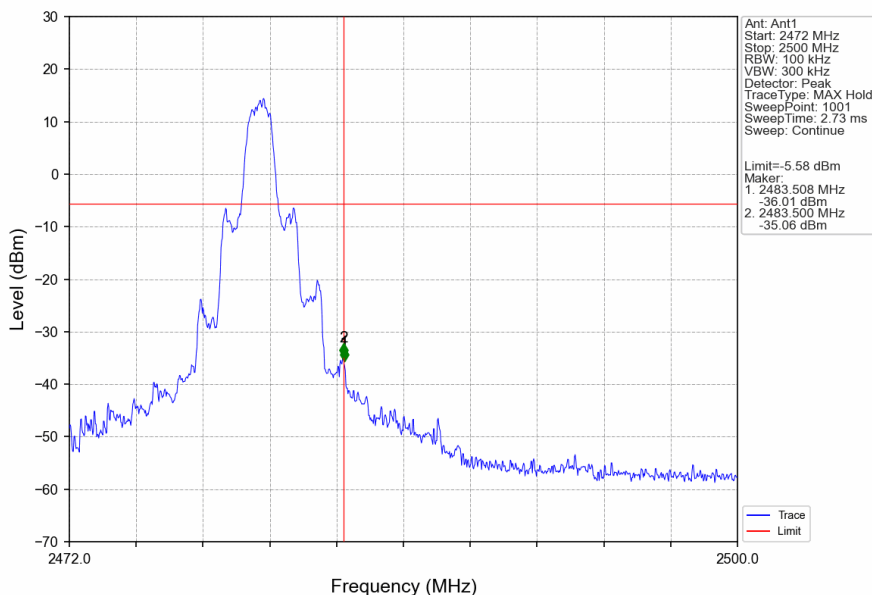


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

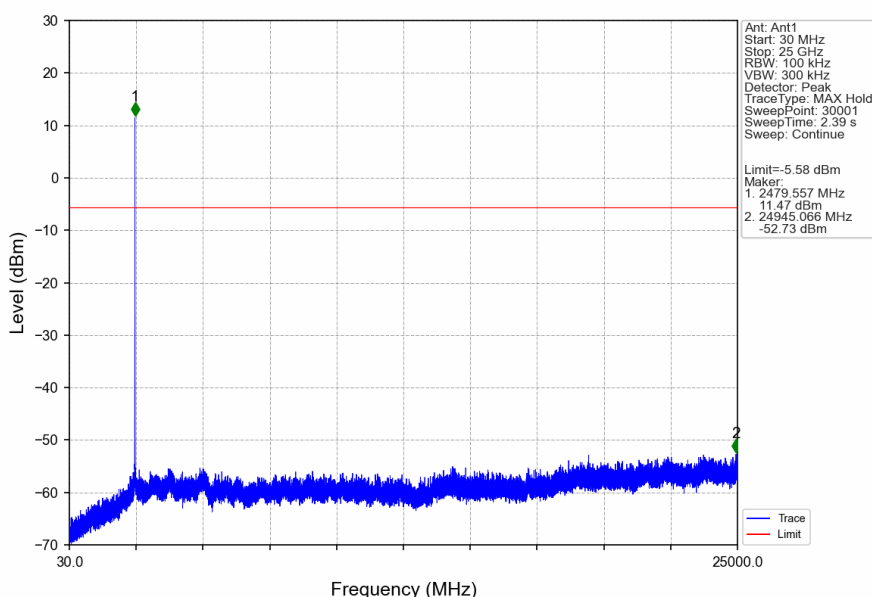

8DPSK_3DH5_HOPP_Ant1_NTNV

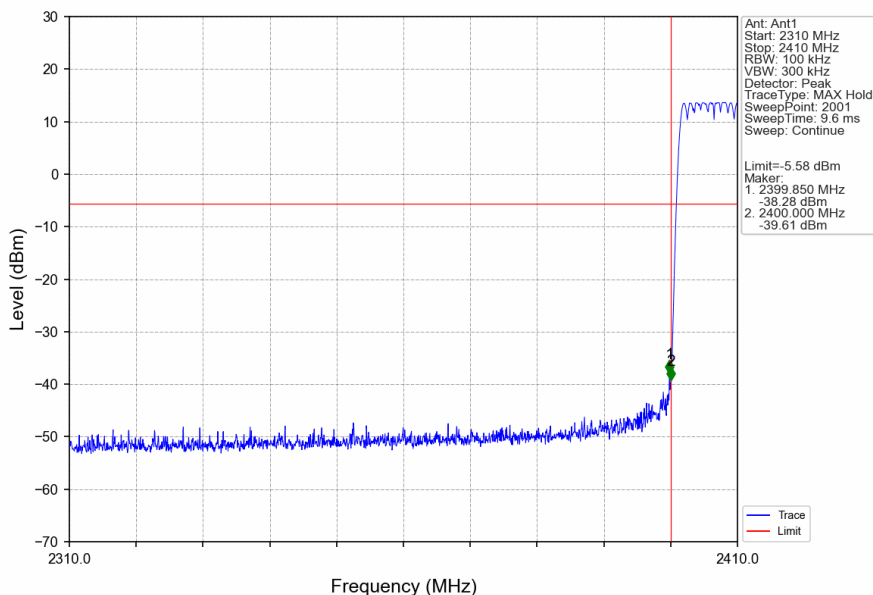

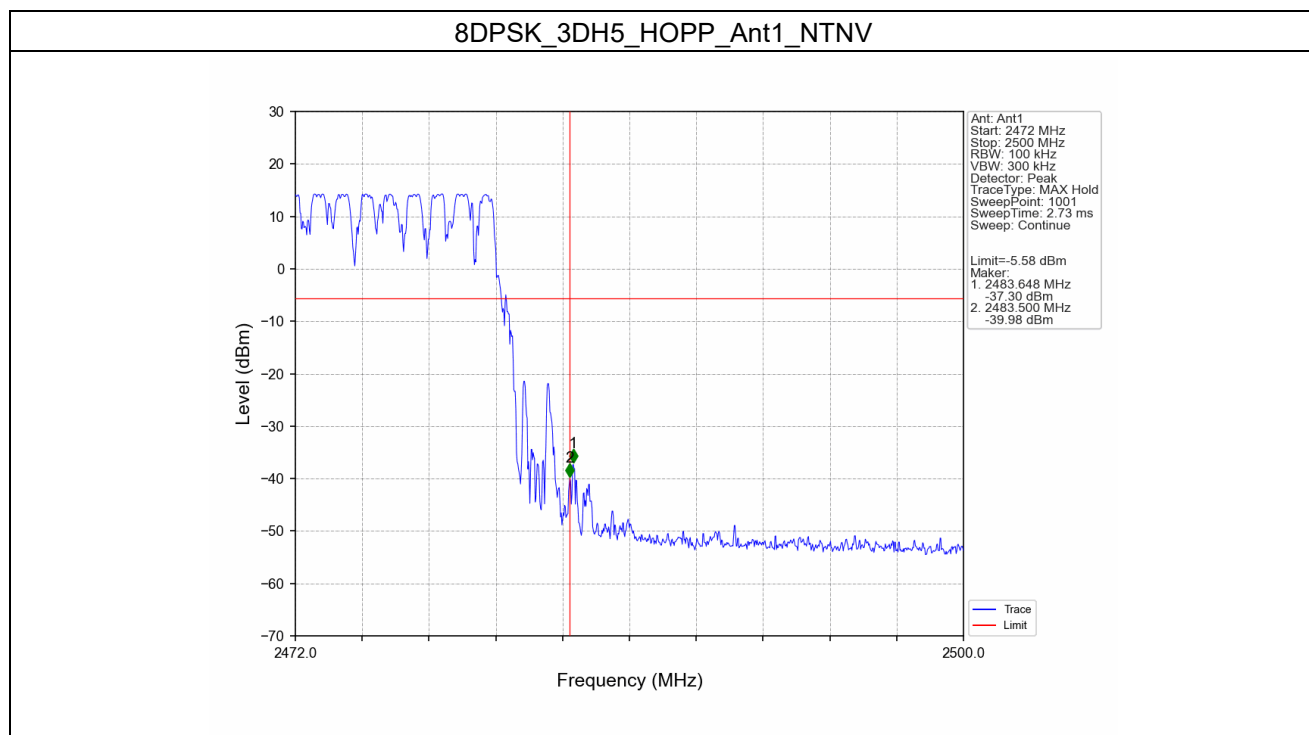

- End of the Report -

