




Lower700MHz UL

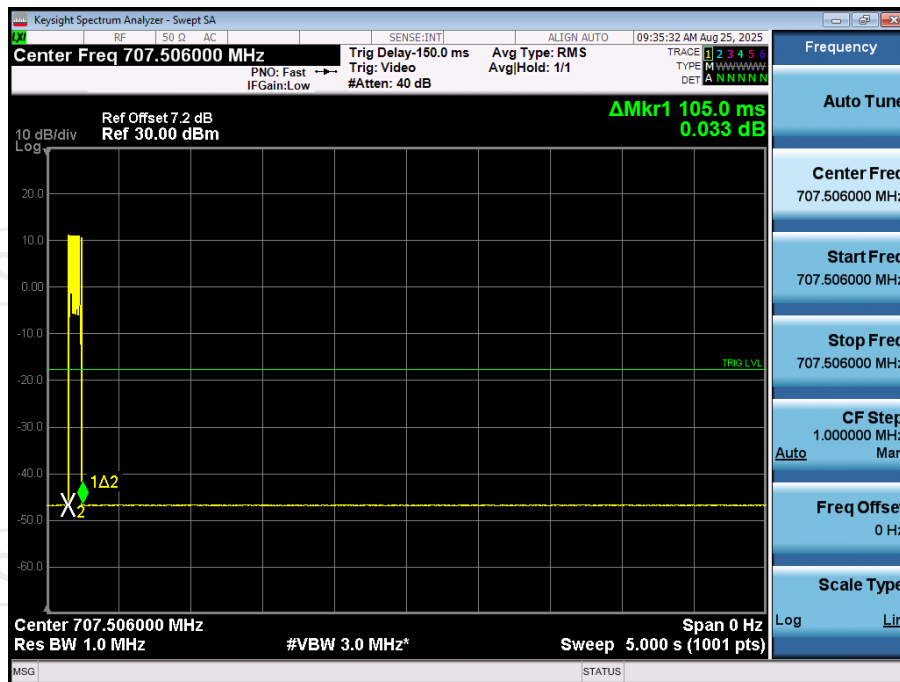


Lower700MHz DL

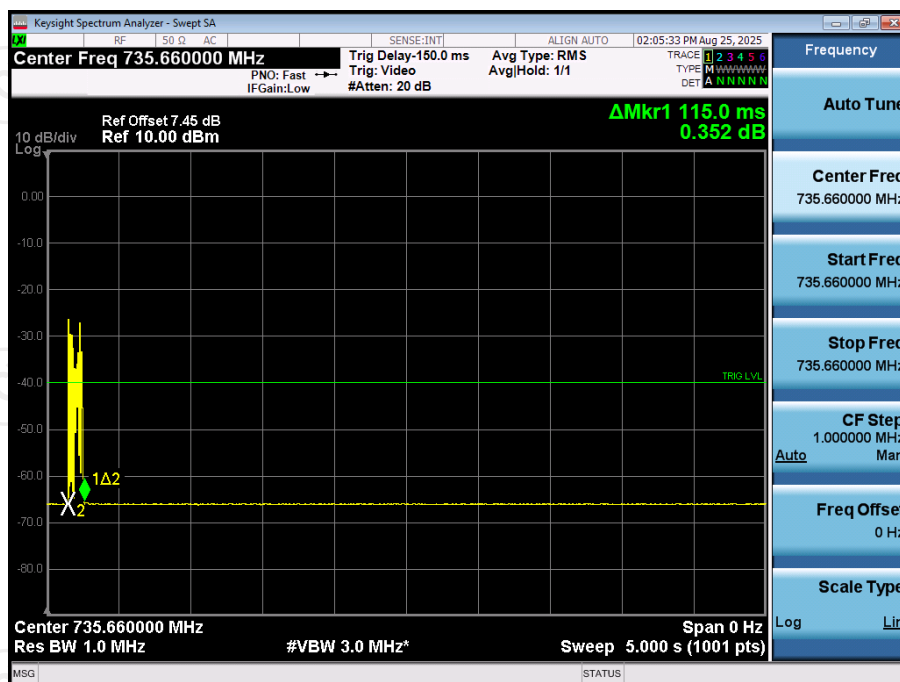

Upper700MHz UL

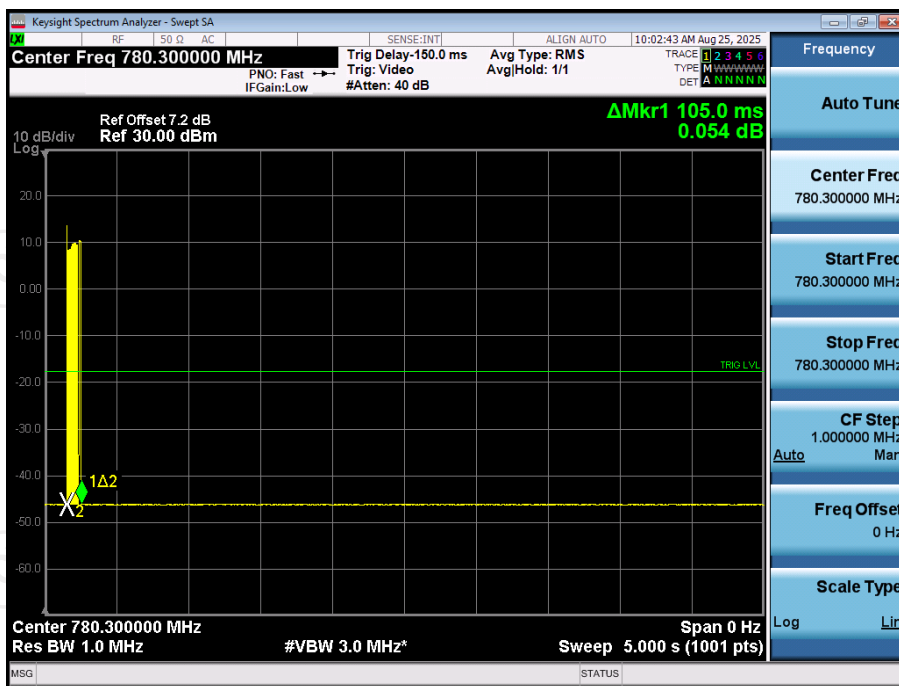


Upper700MHz DL

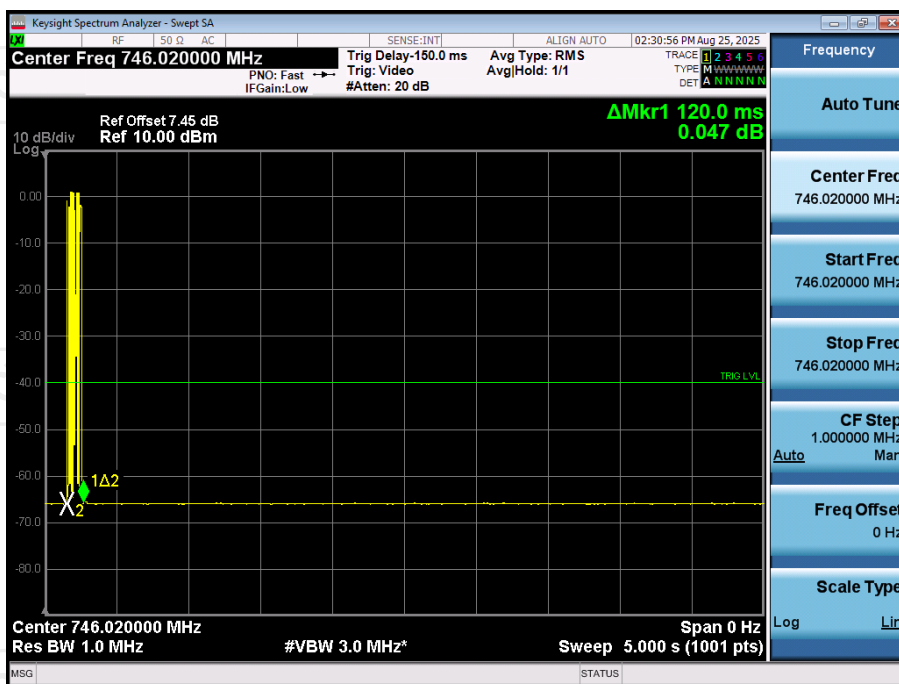


Test Plots of restarting time


PCS UL

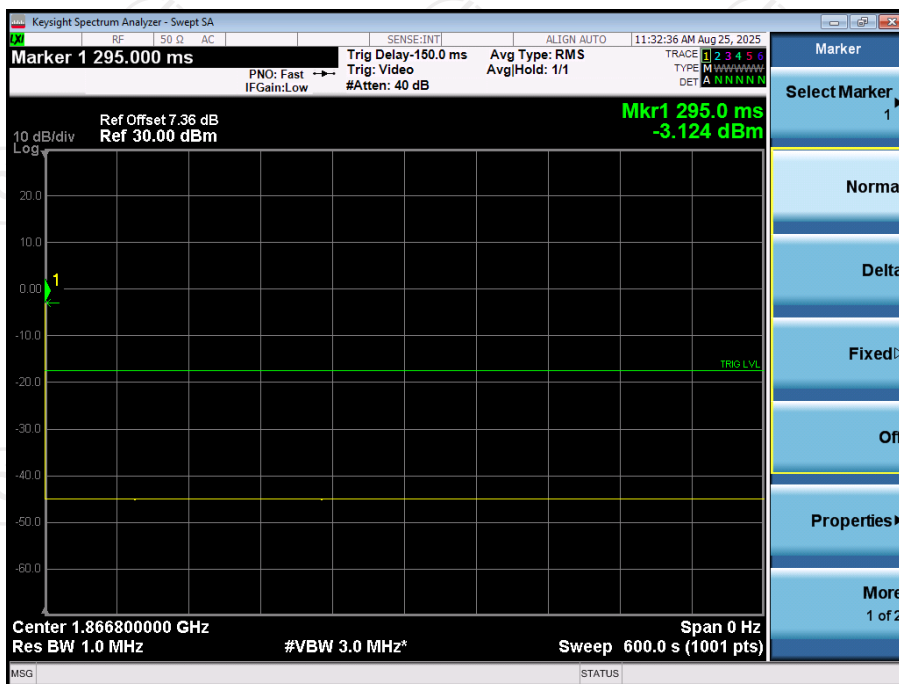


PCS DL

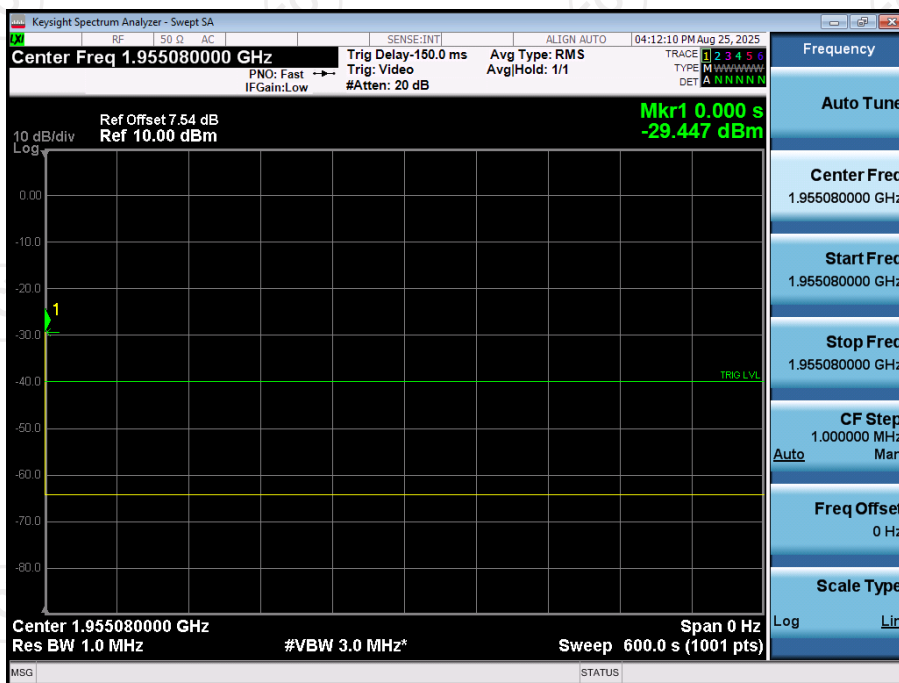


AWS UL

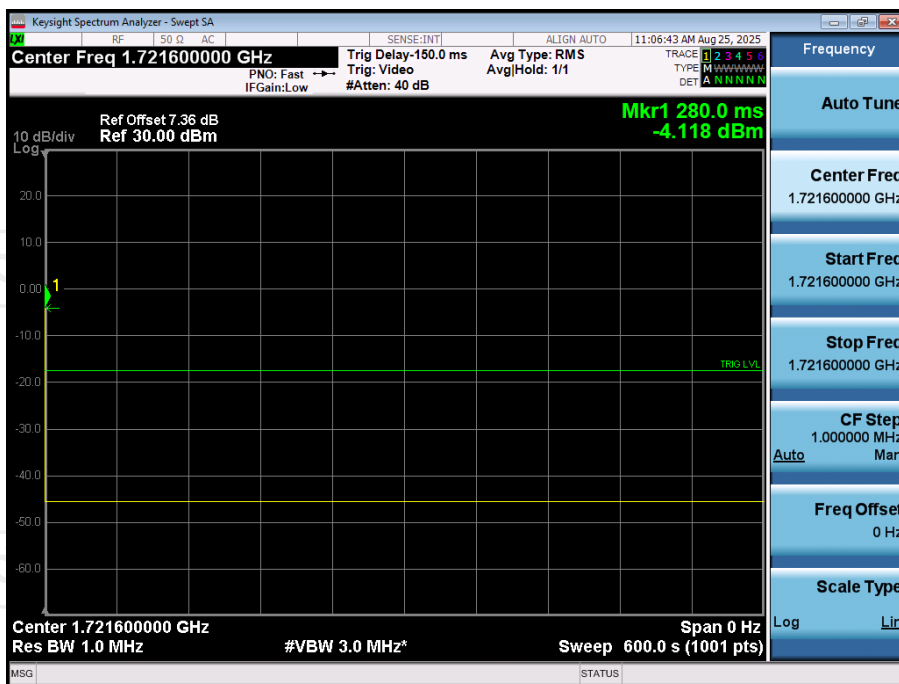


AWS DL

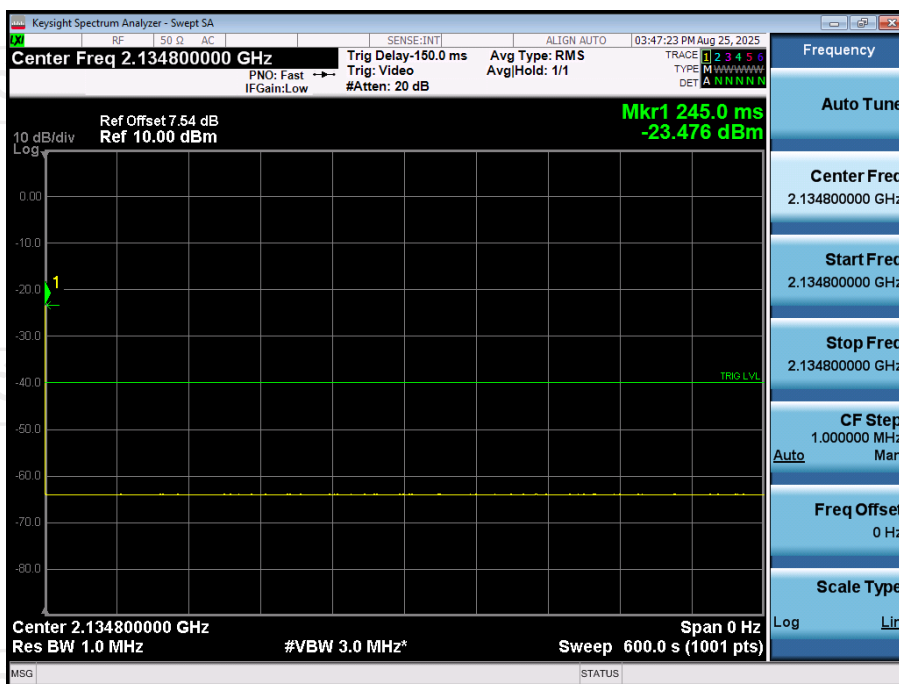


Cellular UL

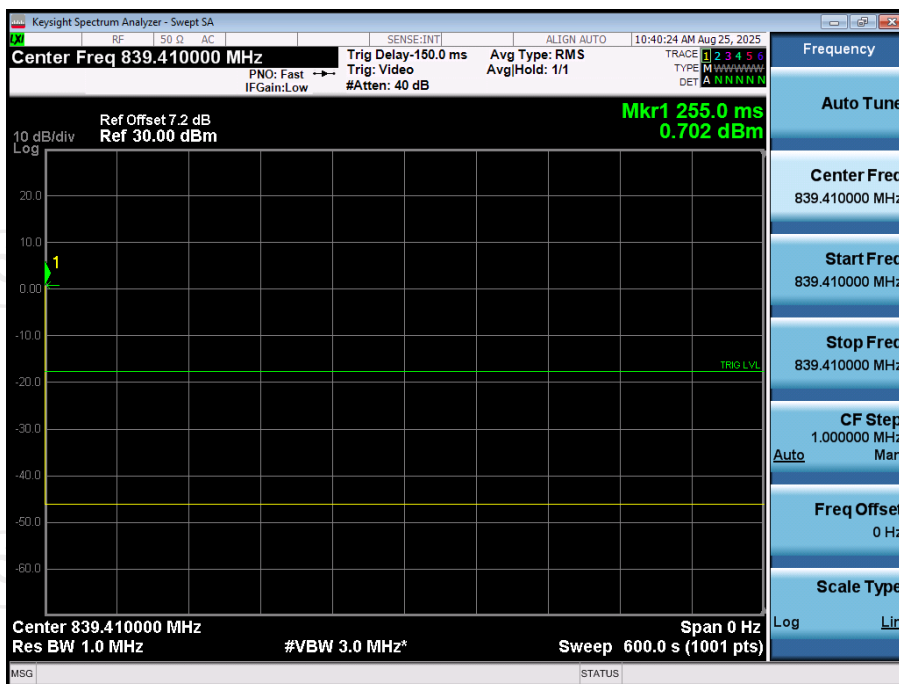


Cellular DL

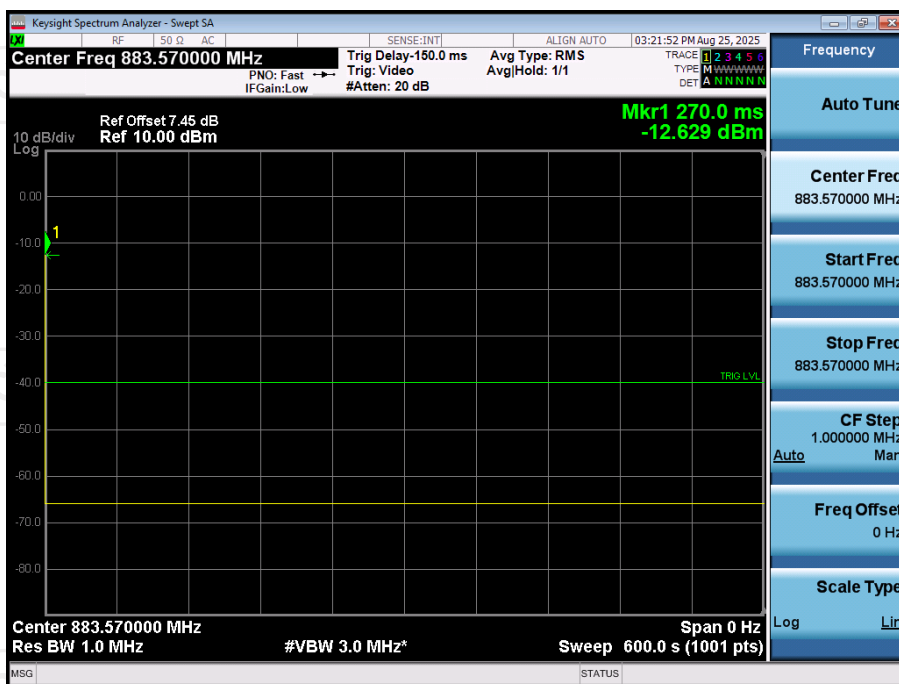


Lower700MHz UL

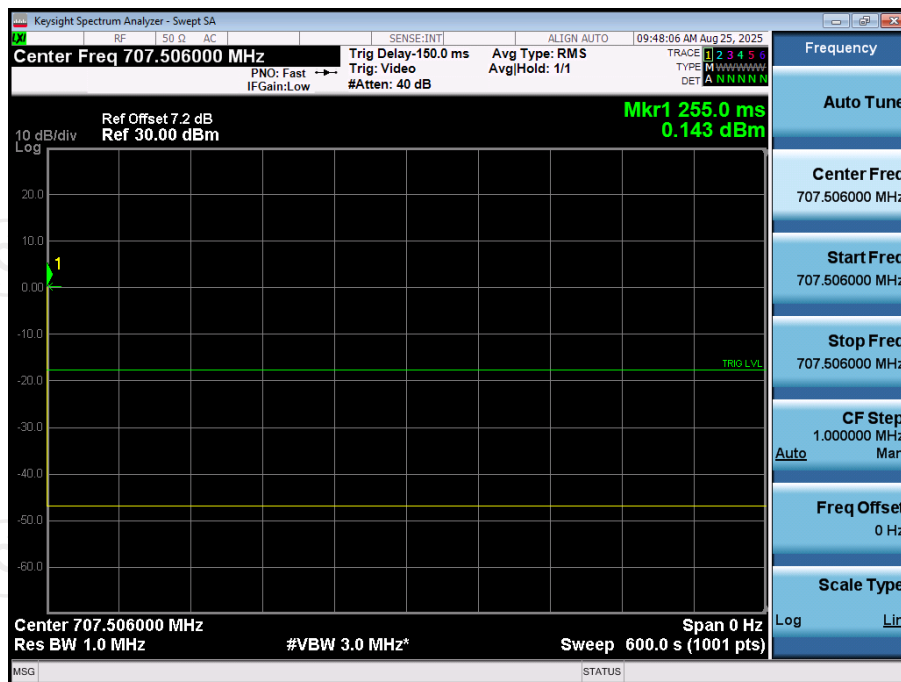


Lower700MHz DL

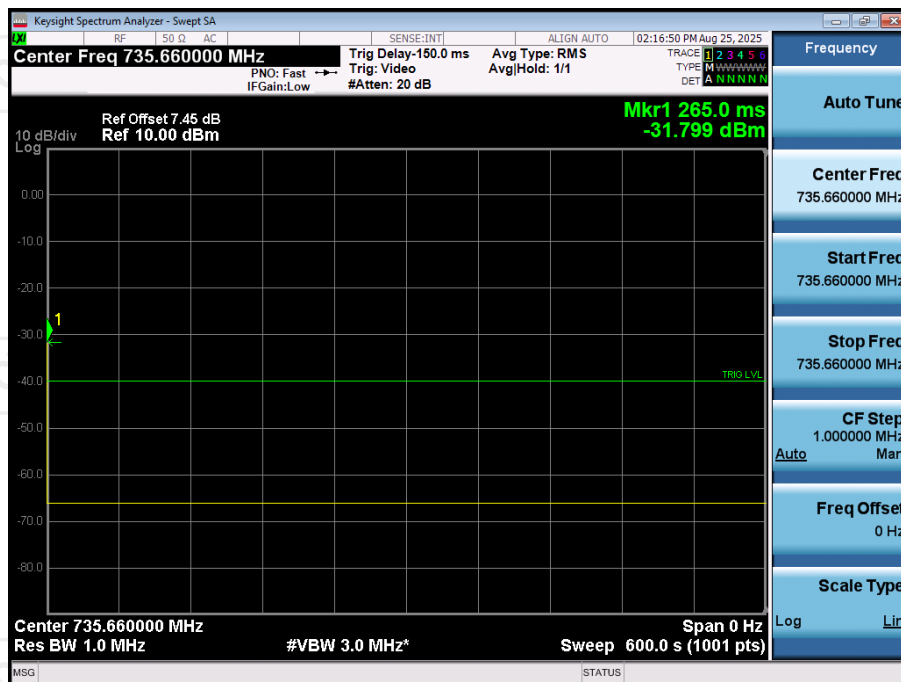

Upper700MHz UL

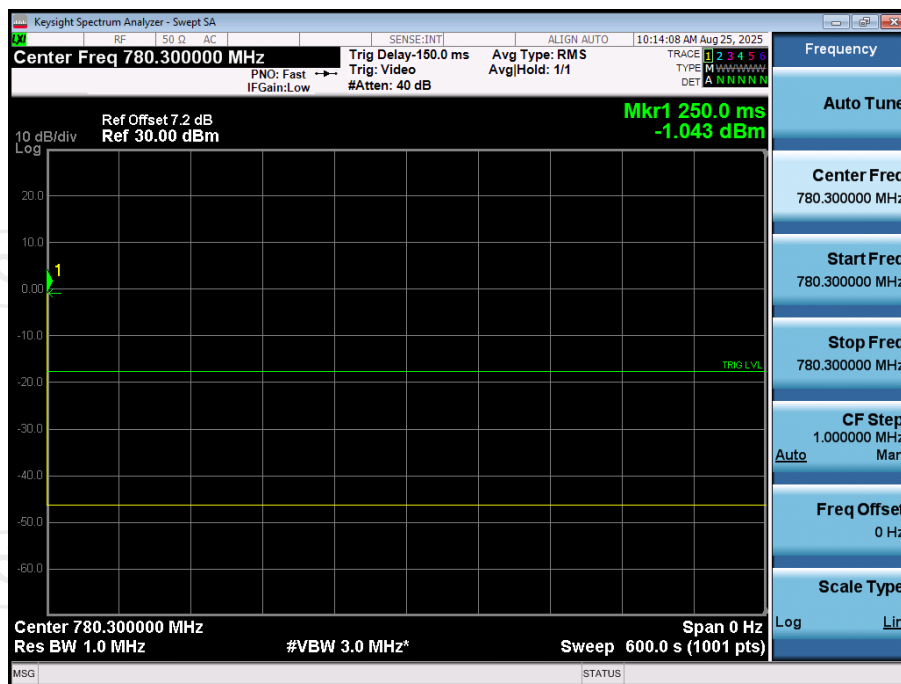

Upper700MHz DL

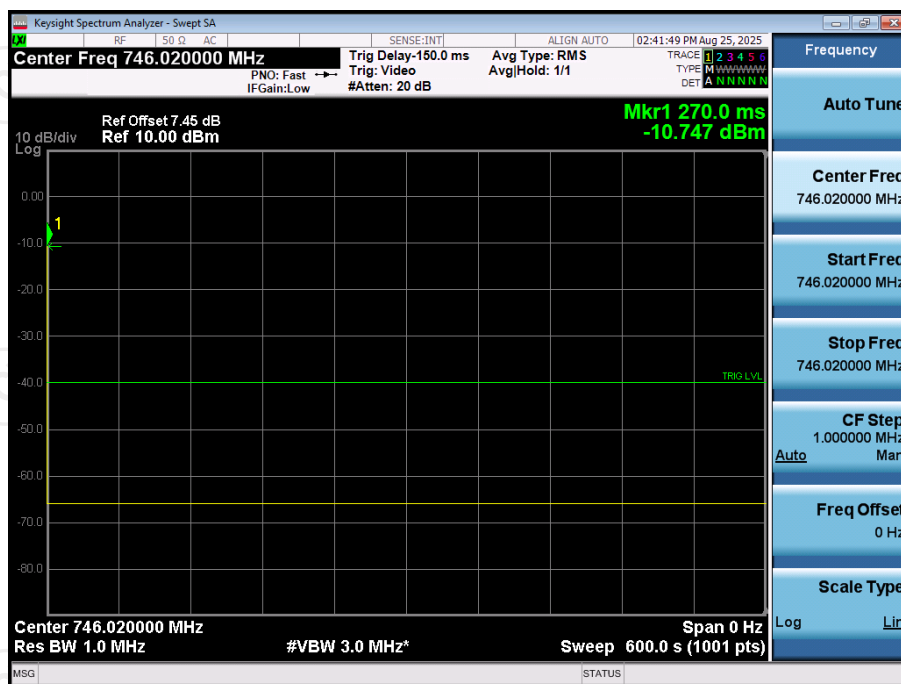

Test results of Mitigation or Shutdown

PCS	Uplink(1850-1915MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	1861.42	-47.01	1870.09	-59.08	12.07	<12	112	300	Pass
+4	EUT Shutdown								

PCS	Downlink(1930-1995MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	1942.42	-42.11	1948.05	-55.67	13.56	<12	112	300	Pass
+4	1942.42	-42.03	1948.05	-58.42	16.39	<12	110	300	Pass
+3	1942.42	-37.31	1948.05	-56.46	19.15	<12	111	300	Pass
+2	1942.42	-34.77	1948.05	-60.93	26.16	<12	113	300	Pass
+1	1942.42	-8.05	1948.05	-75.00	66.95	<12	114	300	Pass
0	EUT Shutdown								

AWS	Uplink(1710-1755MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	1719.05	-45.14	1728.31	-55.51	10.37	<12	114	300	Pass
+4	1719.05	-44.06	1728.31	-55.25	11.19	<12	110	300	Pass
+3	1719.05	-42.23	1728.31	-55.36	13.13	<12	115	300	Pass
+2	EUT Shutdown								

AWS	Downlink(2110-2155MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	2133.72	-42.80	2147.24	-56.36	13.56	<12	112	300	Pass
+4	2133.72	-41.22	2147.24	-56.61	15.39	<12	111	300	Pass
+3	2133.72	-36.98	2147.24	-55.00	18.02	<12	110	300	Pass
+2	2133.72	-31.84	2147.24	-53.37	21.53	<12	115	300	Pass
+1	2133.72	-28.96	2147.24	-57.59	28.63	<12	113	300	Pass
0	EUT Shutdown								

Cellular	Uplink(824-849MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	834.86	-52.56	840.39	-67.87	15.31	<12	111	300	Pass
+4	834.86	-50.99	840.39	-68.27	17.28	<12	116	300	Pass
+3	834.86	-45.70	840.39	-68.20	22.50	<12	110	300	Pass
+2	834.86	-38.42	840.39	-76.73	38.31	<12	112	300	Pass
+1	EUT Shutdown								

Cellular	Downlink(869-894MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	881.02	-54.57	884.31	-66.25	11.68	<12	110	300	Pass
+4	881.02	-53.96	884.31	-66.84	12.88	<12	113	300	Pass
+3	881.02	-49.22	884.31	-64.41	15.19	<12	111	300	Pass
+2	881.02	-45.83	884.31	-63.78	17.95	<12	112	300	Pass
+1	881.02	-38.40	884.31	-61.83	23.43	<12	116	300	Pass
0	881.02	-24.56	884.31	-67.86	43.30	<12	115	300	Pass
-1	EUT Shutdown								

Lower700M Hz	Uplink(698-716MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	703.88	-47.39	708.79	-63.73	16.34	<12	110	300	Pass
+4	703.88	-46.02	708.79	-66.13	20.11	<12	114	300	Pass
+3	EUT Shutdown								


Lower700M Hz	Downlink(728-746MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	740.26	-47.29	742.97	-66.00	18.71	<12	112	300	Pass
+4	740.26	-45.65	742.97	-66.84	21.19	<12	113	300	Pass
+3	740.26	-40.33	742.97	-74.19	33.86	<12	110	300	Pass
+2	EUT Shutdown								

Upper700M Hz	Uplink(776-787MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	781.03	-53.14	784.77	-64.91	11.77	<12	116	300	Pass
+4	781.03	-51.23	784.77	-64.03	12.80	<12	110	300	Pass
+3	EUT Shutdown								

Upper700M Hz	Downlink(746-757MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	750.96	-56.38	754.33	-65.60	9.22	<12	110	300	Pass
+4	750.96	-54.45	754.33	-65.21	10.76	<12	115	300	Pass
+3	750.96	-48.62	754.33	-61.70	13.08	<12	112	300	Pass
+2	EUT Shutdown								

7. Radiation Spurious Emission

7.1.1. Test Specification

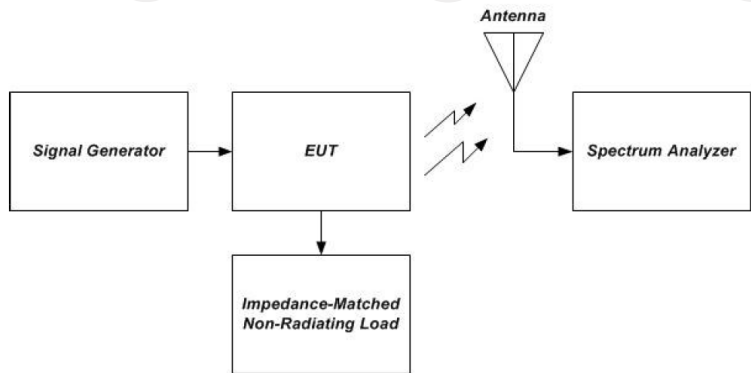Test Requirement:	FCC Part2 Section 2.1053
Test Method:	KDB935210 D03 Signal booster Measurements v04r04
Limit:	-13dBm; For equipment operating in the frequency bands 746-757 MHz and 776-787 MHz, The e.i.r.p. in the band 1559-1610 MHz shall not exceed -70 dBW/MHz for wideband signal and -80 dBW for discrete emission with bandwidth less than 700 Hz.
Test setup:	 Figure 10 – Radiated spurious emissions test and instrumentation setup
Test Procedure:	- Place the EUT on an OATS or semi-anechoic chamber turntable 3 m from the receiving antenna. - Connect the EUT to the test equipment as shown in Figure 10 beginning with the uplink output (donor) port. - Set the signal generator to produce a CW signal with the frequency set to the center of the operational band under test, and the power level set at PIN as determined from measurement results per 7.2. - Measure the radiated spurious emissions from the EUT from the lowest to the highest frequencies as specified in § 2.1057. Maximize the radiated emissions by using the procedures described in ANSI C63.4. - Capture the peak emissions Test Plotss using a peak detector with Max-Hold for inclusion in the test report. Tabular data is acceptable in lieu of spectrum analyzer Test Plotss. - Repeat 7.12c) through 7.12e) for all uplink and downlink operational bands.

Test results:

PASS

7.1.2. Test Instruments

Radiated Emission				
Name	Model No.	Manufacturer	Date of Cal.	Due Date
EMI Test Receiver	ESCI7	R&S	Jan. 21, 2025	Jan. 20, 2026
Spectrum Analyzer	FSQ40	R&S	Jun. 26, 2025	Jun. 25, 2026
Pre-amplifier	8447D	HP	Jun. 26, 2025	Jun. 25, 2026
Pre-amplifier	LNPA_0118G-45	SKET	Jan. 21, 2025	Jan. 20, 2026
Pre-amplifier	LNPA_1840G-50	SKET	Apr. 11, 2025	Apr. 10, 2026
Broadband Antenna	VULB9163	Schwarzbeck	Jun. 29, 2025	Jun. 28, 2026
Horn Antenna	BBHA 9120D	Schwarzbeck	Jun. 29, 2025	Jun. 28, 2026
Horn Antenna	BBHA 9170	Schwarzbeck	Jan. 24, 2025	Jan. 23, 2026
Coaxial cable	RE-03-D	SKET	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	RE-03-M	SKET	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	RE-03-L	SKET	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	RE-04-D	SKET	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	RE-04-M	SKET	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	RE-04-L	SKET	Jun. 27, 2025	Jun. 26, 2026
Loop antenna	FMZB1519B	Schwarzbeck	Jun. 30, 2025	Jun. 29, 2026
Signal Generator	N5182A	Agilent	Jan. 21, 2025	Jan. 20, 2026

7.1.3. Test data

Frequency [MHz]	Antenna polarity [H/V]	Reading Level	Substitution factor	Measurement Level [dBm]	Limit [dBm]	Margin [dB]
PCS Uplink						
1152.15	H	-46.93	-7.85	-54.78	-13.00	-41.78
1882.30	V	-38.05	-6.20	-44.25		-31.25
11032.55	H	-62.52	15.54	-46.98		-33.98
11653.90	V	-64.76	13.28	-51.48		-38.48
PCS Downlink						
1152.15	H	-45.69	-8.32	-54.01	-13.00	-41.01
1151.30	V	-50.46	-7.57	-58.03		-45.03
14128.25	H	-62.67	16.62	-46.05		-33.05
13910.65	V	-63.28	17.66	-45.62		-32.62
Frequency [MHz]	Antenna polarity [H/V]	Reading Level	Substitution factor	Measurement Level [dBm]	Limit [dBm]	Margin [dB]
AWS Uplink						
1151.30	H	-46.63	-7.97	-54.60	-13.00	-41.60
1152.15	V	-47.99	-7.36	-55.35		-42.35
13990.55	H	-63.18	17.36	-45.82		-32.82
13950.60	V	-62.64	17.70	-44.94		-31.94
AWS Downlink						
1151.30	H	-46.43	-7.96	-54.39	-13.00	-41.39
1151.30	V	-51.01	-8.30	-59.31		-46.31
10488.55	H	-61.60	14.87	-46.73		-33.73
9275.60	V	-63.59	13.60	-49.99		-36.99

Frequency [MHz]	Antenna polarity [H/V]	Reading Level	Substitution factor	Measurement Level [dBm]	Limit [dBm]	Margin [dB]
Cellular Uplink						
1152.00	H	-45.37	-7.73	-53.10	-13.00	-40.10
1152.00	V	-47.38	-7.09	-54.47		-41.47
7927.60	H	-61.42	10.28	-51.14		-38.14
7098.40	V	-61.96	8.86	-53.10		-40.10
Cellular Downlink						
1152.00	H	-46.70	-7.68	-54.38	-13.00	-41.38
1152.00	V	-50.31	-7.61	-57.92		-44.92
7146.80	H	-61.98	9.14	-52.84		-39.84
6392.40	V	-61.46	7.56	-53.90		-40.90

Frequency [MHz]	Antenna polarity [H/V]	Reading Level	Substitution factor	Measurement Level [dBm]	Limit [dBm]	Margin [dB]
Lower700MHz Uplink						
1152.00	H	-53.47	-8.63	-62.10	-13.00	-49.10
1152.00	V	-48.61	-7.82	-56.43		-43.43
6805.20	H	-63.43	8.52	-54.91		-41.91
3532.40	V	-50.46	10.43	-40.03		-27.03
Lower700MHz Downlink						
1151.90	H	-44.85	-8.07	-52.92	-13.00	-39.92
1124.95	V	-54.42	-7.76	-62.18		-49.18
6443.90	H	-60.27	7.49	-52.78		-39.78
7146.35	V	-62.39	9.81	-52.58		-39.58

Frequency [MHz]	Antenna polarity [H/V]	Reading Level	Substitution factor	Measurement Level [dBm]	Limit [dBm]	Margin [dB]
Upper700MHz Uplink						
1152.00	H	-45.90	-7.79	-53.69	-13.00	-40.69
1152.00	V	-47.46	-6.63	-54.09		-41.09
7185.20	H	-61.83	9.23	-52.60		-39.60
6430.40	V	-60.62	7.55	-53.07		-40.07
1601.25	H	-63.38	-7.02	-70.40	-40.00	-30.40
1604.38	V	-66.35	-6.59	-72.94		-32.94
Upper700MHz Downlink						
1151.90	H	-53.02	-7.37	-60.39	-13.00	-47.39
1151.90	V	-53.15	-6.94	-60.09		-47.09
6413.10	H	-58.17	7.90	-50.27		-37.27
7113.10	V	-61.57	9.98	-51.59		-38.59
1606.61	H	-63.61	-7.67	-71.28	-40.00	-31.28
1602.54	V	-66.96	-6.50	-73.46		-33.46

Appendix A: Photographs of Test Setup

Please refer to document Appendix No.: TCT250811E008-A

Appendix B: Photographs of EUT

Please refer to document Appendix No.: TCT250811E008-B & TCT250811E008-C

*******END OF REPORT*******