



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street,  
Bao'an District, Shenzhen, China

## FCC PART 15 SUBPART C TEST REPORT

### FCC PART 15.247

Report Reference No. .... : CTA25101401801

FCC ID. .... : 2BS2P-C5

Compiled by

( position+printed name+signature): File administrators Zoey Cao

Supervised by

( position+printed name+signature): Project Engineer Ace Chai

Approved by

( position+printed name+signature): RF Manager Eric Wang

Date of issue ..... : Nov. 06, 2025

Testing Laboratory Name ..... : Shenzhen CTA Testing Technology Co., Ltd.

Address ..... : Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community,  
Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name ..... : Foshan Sesame Open Door Technology Co., LTD

Address ..... : 111, 1st Floor, No. 25-7, Zone C, Southwest Park, Sanshui Central  
Science and Technology Industrial Zone, Foshan City, China

Test specification..... :

Standard ..... : FCC Part 15.247

TRF Originator ..... : Shenzhen CTA Testing Technology Co., Ltd.

**Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description..... : Hidden recorder

Trade Mark..... : N/A

Manufacturer ..... : Shenzhen FenghangIndustrial Co., Ltd

Model/Type reference ..... : C5

Listed Models ..... : Refer to page 2

Modulation Type ..... : CCK/DSSS/OFDM

Operation Frequency ..... : From 2412 - 2462MHz

Rating..... : Input: 5V== 1.0A

Battery: 3.7V 200mAh 0.74Wh

Result..... : **PASS**

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

## TEST REPORT

Equipment under Test : Hidden recorder

Model /Type : C5

Listed Models : C6, C7, C8, C9, A5, A6, A7, A8, A9, Z5, Z6, Z7, Z8, Z9, M5, M6, M7, M8, M9, C5pro, C6pro, C7pro, C8pro, C9pro, A5pro, A6pro, A7pro, A8pro, A9pro, Z5pro, Z6pro, Z7pro, Z8pro, Z9pro, M5pro, M6pro, M7pro, M8pro, M9pro

Model difference : The PCB board, circuit, structure and internal of these models are the same, Only model number and colour is different for these model.

Applicant : Foshan Sesame Open Door Technology Co., LTD

Address : 111, 1st Floor, No. 25-7, Zone C, Southwest Park, Sanshui Central Science and Technology Industrial Zone, Foshan City, China

Manufacturer : Shenzhen Fenghang Industrial Co., Ltd

Address : 303, Building C, Huafeng International Robot Fosun Industrial Park, Hangcheng Avenue, Guxing Community, Xixiang Street, Bao'an District, Shenzhen, China

|                     |             |
|---------------------|-------------|
| <b>Test Result:</b> | <b>PASS</b> |
|---------------------|-------------|

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

|     |                                                           |    |
|-----|-----------------------------------------------------------|----|
| 1   | TEST STANDARDS.....                                       | 4  |
| 2   | SUMMARY.....                                              | 5  |
| 2.1 | General Remarks .....                                     | 5  |
| 2.2 | Product Description .....                                 | 5  |
| 2.3 | Equipment Under Test.....                                 | 5  |
| 2.4 | Short description of the Equipment under Test (EUT) ..... | 5  |
| 2.5 | EUT configuration.....                                    | 6  |
| 2.6 | EUT operation mode .....                                  | 6  |
| 2.7 | Block Diagram of Test Setup.....                          | 6  |
| 2.8 | Related Submittal(s) / Grant (s).....                     | 6  |
| 2.9 | Modifications.....                                        | 6  |
| 3   | TEST ENVIRONMENT .....                                    | 7  |
| 3.1 | Address of the test laboratory .....                      | 7  |
| 3.2 | Test Facility.....                                        | 7  |
| 3.3 | Environmental conditions .....                            | 7  |
| 3.4 | Test Description.....                                     | 8  |
| 3.5 | Statement of the measurement uncertainty .....            | 8  |
| 3.6 | Equipments Used during the Test .....                     | 10 |
| 4   | TEST CONDITIONS AND RESULTS .....                         | 11 |
| 4.1 | AC Power Conducted Emission .....                         | 11 |
| 4.2 | Radiated Emission.....                                    | 12 |
| 4.3 | Maximum Peak Conducted Output Power .....                 | 19 |
| 4.4 | Power Spectral Density .....                              | 20 |
| 4.5 | 6dB Bandwidth .....                                       | 21 |
| 4.6 | Out-of-band Emissions .....                               | 22 |
| 4.7 | Antenna Requirement.....                                  | 23 |
| 4.8 | On Time and Duty Cycle .....                              | 24 |
| 5   | Test Setup Photos of the EUT .....                        | 25 |
| 6   | Photos of the EUT.....                                    | 26 |

## 1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2020 +Cor. 1-2023+ C63.10a-2024+ Errata to C63.10a-2024](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 v05r02](#): Guidance for Compliance Measurements on Digital Transmission Systems (DTS) ,Frequency Hopping Spread Spectrum System(HFSS), and Hybrid System Devices Operating Under §15.247 of The FCC rules.

## 2 SUMMARY

### 2.1 General Remarks

|                                |   |               |
|--------------------------------|---|---------------|
| Date of receipt of test sample | : | Oct. 14, 2025 |
| Testing commenced on           | : | Oct. 14, 2025 |
| Testing concluded on           | : | Nov. 06, 2025 |

### 2.2 Product Description

|                       |                                                                                  |
|-----------------------|----------------------------------------------------------------------------------|
| Product description:  | Hidden recorder                                                                  |
| Model/Type reference: | C5                                                                               |
| Power supply:         | Input: 5V --- 1.0A<br>Battery: 3.7V 200mAh 0.74Wh                                |
| Charger information:  | Input: 12/24Vdc,<br>Output: 5.0Vdc, 2.5A                                         |
| Hardware version:     | V1.0                                                                             |
| Software version:     | V1.0                                                                             |
| Testing sample ID:    | CTA251014018-1# (Engineer sample)<br>CTA251014018-2# (Normal sample)             |
| <b>WIFI :</b>         |                                                                                  |
| Supported type:       | 802.11b/802.11g/802.11n(HT20)/ 802.11n(HT40)                                     |
| Modulation:           | 802.11b: DSSS<br>802.11g/802.11n(HT20)/ 802.11n(HT40): OFDM                      |
| Operation frequency:  | 802.11b/802.11g/802.11n(HT20): 2412MHz~2462MHz<br>802.11n(HT40): 2422MHz~2452MHz |
| Channel number:       | 802.11b/802.11g/802.11n(HT20): 11<br>802.11n(HT40):7                             |
| Channel separation:   | 5MHz                                                                             |
| Antenna type:         | PIFA antenna                                                                     |
| Antenna gain:         | 2.24 dBi                                                                         |

### 2.3 Equipment Under Test

#### Power supply system utilised

Refer to section 2.2

### 2.4 Short description of the Equipment under Test (EUT)

This is a Hidden recorder.

For more details, refer to the user's manual of the EUT.

| Test Software Version | Tools software(ADB command) |         |          |
|-----------------------|-----------------------------|---------|----------|
| Frequency             | 2412 MHz                    | 2437MHz | 2462 MHz |
| 802.11b               | 16                          | 16      | 16       |
| 802.11g               | 15                          | 15      | 15       |
| 802.11n20             | 15                          | 15      | 15       |
| Frequency             | 2422 MHz                    | 2437MHz | 2452 MHz |
| 802.11n40             | 15                          | 15      | 15       |

## 2.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

|  |  |
|--|--|
|  |  |
|--|--|


## 2.6 EUT operation mode

The application provider specific test software to control sample in continuous TX and RX for testing meet KDB558074 test requirement.

IEEE 802.11b/g/n: Thirteen channels are provided to the EUT.

| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|---------|----------------|---------|----------------|
| 1       | 2412           | 8       | 2447           |
| 2       | 2417           | 9       | 2452           |
| 3       | 2422           | 10      | 2457           |
| 4       | 2427           | 11      | 2462           |
| 5       | 2432           |         |                |
| 6       | 2437           |         |                |
| 7       | 2442           |         |                |

## 2.7 Block Diagram of Test Setup

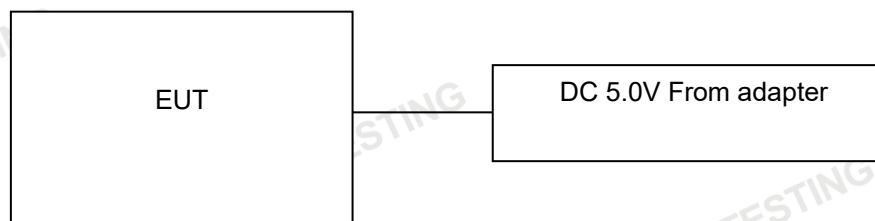

## 2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 2.9 Modifications

No modifications were implemented to meet testing criteria.

### 3 TEST ENVIRONMENT

#### 3.1 Address of the test laboratory

**Shenzhen CTA Testing Technology Co., Ltd.**

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

#### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

**FCC-Registration No.: 517856 Designation Number: CN1318**

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

**A2LA-Lab Cert. No.: 6534.01**

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

**ISED#: 27890 CAB identifier: CN0127**

Shenzhen CTA Testing Technology Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

#### 3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 25 ° C       |
|                       |              |
| Humidity:             | 45 %         |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

Conducted testing:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 25 ° C       |
|                       |              |
| Humidity:             | 44 %         |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

AC Power Conducted Emission

|                       |              |
|-----------------------|--------------|
| Temperature:          | 24 ° C       |
|                       |              |
| Humidity:             | 44 %         |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

### 3.4 Test Description

|                                 |                                     |      |
|---------------------------------|-------------------------------------|------|
| FCC PART 15.247                 |                                     |      |
| FCC Part 15.207                 | AC Power Conducted Emission         | N/A  |
| FCC Part 15.247(a)(2)           | 6dB Bandwidth                       | PASS |
| FCC Part 15.247(d)              | Spurious RF Conducted Emission      | PASS |
| FCC Part 15.247(b)              | Maximum Peak Conducted Output Power | PASS |
| FCC Part 15.247(e)              | Power Spectral Density              | PASS |
| FCC Part 15.109/ 15.205/ 15.209 | Radiated Emissions                  | PASS |
| FCC Part 15.247(d)              | Band Edge                           | PASS |
| FCC Part 15.203/15.247 (b)      | Antenna Requirement                 | PASS |

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report
3. RF Conducted test Offset= cable loss, For conducted spurious emission test, cable loss is the maximum value in the range of test.

#### Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Test Items                                       | Mode            | Data Rate | Channel |
|--------------------------------------------------|-----------------|-----------|---------|
| Maximum Peak Conducted Output Power              | 11b/DSSS        | 1 Mbps    | 1/6/11  |
| Power Spectral Density                           | 11g/OFDM        | 6 Mbps    | 1/6/11  |
| 6dB Bandwidth                                    | 11n(20MHz)/OFDM | MCS0      | 1/6/11  |
| Spurious RF conducted emission                   | 11n(40MHz)/OFDM | MCS0      | 3/6/9   |
| Radiated Emission 9KHz~1GHz&                     | 11b/DSSS        | 1 Mbps    | 1/11    |
| Radiated Emission 1GHz~10 <sup>th</sup> Harmonic | 11g/OFDM        | 6 Mbps    | 1/11    |
| Band Edge                                        | 11n(20MHz)/OFDM | MCS0      | 1/11    |
|                                                  | 11n(40MHz)/OFDM | MCS0      | 3/9     |

### 3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen CTA Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen CTA Testing Technology Co., Ltd. :

| Test                  | Range      | Measurement Uncertainty | Notes |
|-----------------------|------------|-------------------------|-------|
| Radiated Emission     | 9KHz~30MHz | 3.02 dB                 | (1)   |
| Radiated Emission     | 30~1000MHz | 4.06 dB                 | (1)   |
| Radiated Emission     | 1~18GHz    | 5.14 dB                 | (1)   |
| Radiated Emission     | 18-40GHz   | 5.38 dB                 | (1)   |
| Conducted Disturbance | 0.15~30MHz | 2.14 dB                 | (1)   |

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China  
Tel: +86-755 2322 5875 E-mail: cta@cta-test.cn Web: http://www.cta-test.cn

|                                             |             |         |     |
|---------------------------------------------|-------------|---------|-----|
| Output Peak power                           | 30MHz~18GHz | 0.55 dB | (1) |
| Power spectral density                      | /           | 0.57 dB | (1) |
| Spectrum bandwidth                          | /           | 1.1%    | (1) |
| Radiated spurious emission<br>(30MHz-1GHz)  | 30~1000MHz  | 4.10 dB | (1) |
| Radiated spurious emission<br>(1GHz-18GHz)  | 1~18GHz     | 4.32 dB | (1) |
| Radiated spurious emission<br>(18GHz-40GHz) | 18-40GHz    | 5.54 dB | (1) |
| Time                                        | /           | ±2%     | (1) |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3.6 Equipments Used during the Test

| Test Equipment                                              | Manufacturer    | Model No.     | Equipment No. | Calibration Date | Calibration Due Date |
|-------------------------------------------------------------|-----------------|---------------|---------------|------------------|----------------------|
| LISN                                                        | R&S             | ENV216        | CTA-308       | 2025/08/04       | 2026/08/03           |
| LISN                                                        | R&S             | ENV216        | CTA-314       | 2025/07/30       | 2026/07/29           |
| EMI Test Receiver                                           | R&S             | ESPI          | CTA-307       | 2025/07/30       | 2026/07/29           |
| EMI Test Receiver                                           | R&S             | ESCI          | CTA-306       | 2025/07/30       | 2026/07/29           |
| Spectrum Analyzer                                           | Agilent         | N9020A        | CTA-301       | 2025/05/17       | 2026/05/16           |
| Spectrum Analyzer                                           | Agilent         | N9020A        | CTA-301       | 2025/07/30       | 2026/07/29           |
| Vector Signal generator                                     | Agilent         | N5182A        | CTA-305       | 2025/07/30       | 2026/07/29           |
| Analog Signal Generator                                     | R&S             | E4421B        | CTA-304       | 2025/07/30       | 2026/07/29           |
| WIDEBAND RADIO COMMUNICATION TESTER                         | R&S             | CMW500        | CTA-302       | 2025/07/30       | 2026/07/29           |
| Temperature and humidity meter                              | Chigo           | ZG-7020       | CTA-326       | 2025/07/31       | 2026/07/30           |
| Ultra-Broadband Antenna                                     | Schwarzbeck     | VULB9163      | CTA-310       | 2023/10/17       | 2026/10/16           |
| Horn Antenna                                                | Schwarzbeck     | BBHA 9120D    | CTA-309       | 2023/10/13       | 2026/10/12           |
| Loop Antenna                                                | Zhinan          | ZN30900C      | CTA-311       | 2023/10/17       | 2026/10/16           |
| Horn Antenna                                                | Schwarzbeck     | BBHA 9170     | CTA-346       | 2025/05/18       | 2028/05/17           |
| Amplifier                                                   | Schwarzbeck     | BBV9745       | CTA-312       | 2025/07/30       | 2026/07/29           |
| Amplifier                                                   | Tonscend        | TAP-011840    | CTA-313       | 2025/07/30       | 2026/07/29           |
| High-Pass Filter                                            | XingBo          | XBLBQ-GTA18   | CTA-402       | 2025/07/30       | 2026/07/29           |
| High-Pass Filter                                            | XingBo          | XBLBQ-GTA27   | CTA-403       | 2025/07/30       | 2026/07/29           |
| Automatic control unit                                      | Tonscend        | JS0806-2      | CTA-351       | 2025/07/30       | 2026/07/29           |
| Amplifier                                                   | SKET            | LNPA 1840G-50 | CTA-345       | 2025/05/17       | 2026/05/16           |
| Spectrum analyzer                                           | R&S             | FSV40-N       | CTA-344       | 2025/05/17       | 2026/05/16           |
| Attenuator                                                  | XINQY           | 10dB          | N/A           | N/A              | N/A                  |
| Programmable Constant Temperature And Humidity Test Chamber | DONGGUAN JINGYU | HT-H-408      | CTA-053       | 2025/07/30       | 2026/07/29           |
| EMI Test Software                                           | Tonscend        | TS@JS32-RE    | 5.0.0.2       | N/A              | N/A                  |
| EMI Test Software                                           | Tonscend        | TS@JS32-CE    | 5.0.0.1       | N/A              | N/A                  |
| RF Test Software                                            | Tonscend        | TS@JS1120-3   | 3.1.65        | N/A              | N/A                  |
| RF Test Software                                            | Tonscend        | TS@JS1120     | 3.1.46        | N/A              | N/A                  |

## 4 TEST CONDITIONS AND RESULTS

### 4.1 AC Power Conducted Emission

#### TEST CONFIGURATION



#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2020.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2020
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2020
- 4 The EUT received power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |

\* Decreases with the logarithm of the frequency.


#### TEST RESULTS

The EUT is a vehicle device, So this test Item is not applicable for the EUT.


## 4.2 Radiated Emission

### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

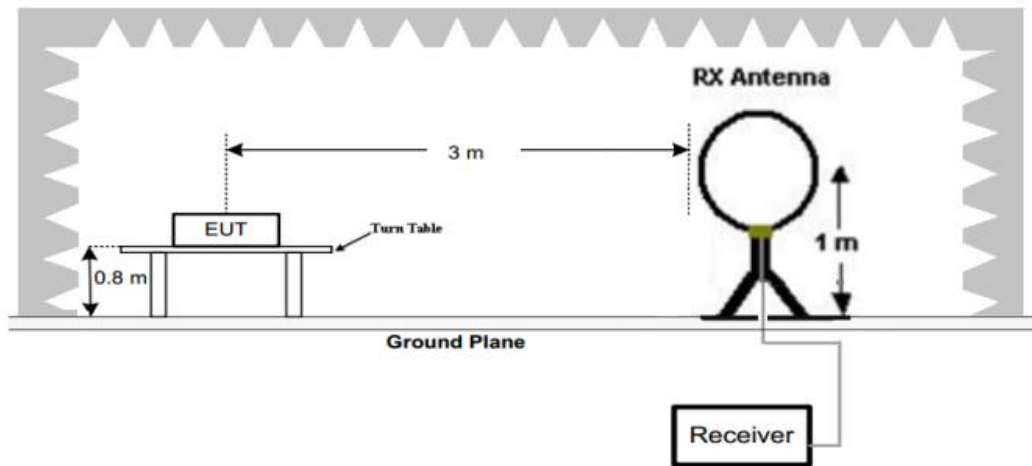


Frequency range 30MHz – 1000MHz

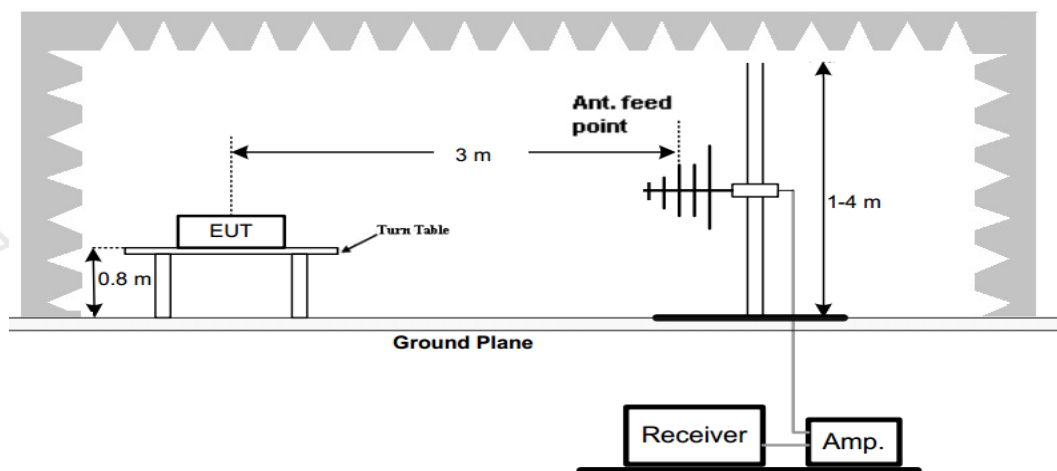

Frequency range above 1GHz-25GHz

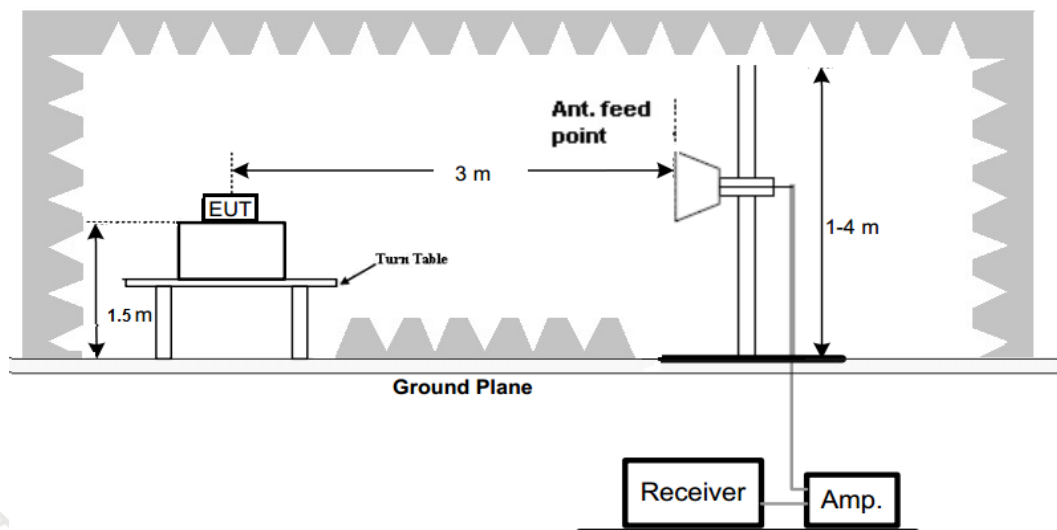

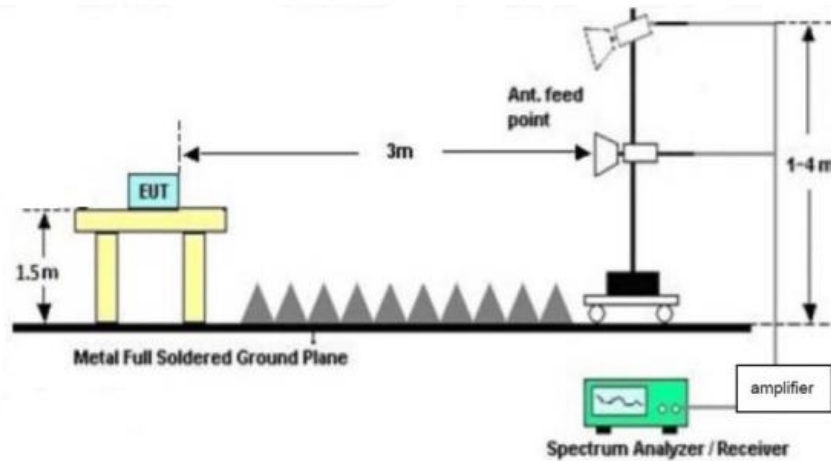

### TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz; the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type          | Test Distance |
|----------------------|----------------------------|---------------|
| 9KHz-30MHz           | Active Loop Antenna        | 3             |
| 30MHz-1GHz           | Ultra-Broadband Antenna    | 3             |
| 1GHz-18GHz           | Double Ridged Horn Antenna | 3             |
| 18GHz-25GHz          | Horn Antenna               | 1             |

7. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting                                                                            | Detector |
|----------------------|-----------------------------------------------------------------------------------------------------------|----------|
| 9KHz-150KHz          | RBW=200Hz/VBW=3KHz, Sweep time=Auto                                                                       | QP       |
| 150KHz-30MHz         | RBW=9KHz/VBW=100KHz, Sweep time=Auto                                                                      | QP       |
| 30MHz-1GHz           | RBW=120KHz/VBW=1000KHz, Sweep time=Auto                                                                   | QP       |
| 1GHz-40GHz           | Peak Value: RBW=1MHz/VBW=3MHz,<br>Sweep time=Auto<br>Average Value: RBW=1MHz/VBW=10Hz,<br>Sweep time=Auto | Peak     |

### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

|                           |                                            |
|---------------------------|--------------------------------------------|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |                                            |

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

### RADIATION LIMIT

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China  
Tel: +86-755 2322 5875 E-mail: cta@cta-test.cn Web: http://www.cta-test.cn

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.


| Frequency (MHz) | Distance (Meters) | Radiated (dBμV/m)                          | Radiated (μV/m)       |
|-----------------|-------------------|--------------------------------------------|-----------------------|
| 0.009-0.49      | 3                 | $20\log(2400/F(\text{KHz}))+40\log(300/3)$ | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 3                 | $20\log(24000/F(\text{KHz}))+40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30        | 3                 | $20\log(30)+40\log(30/3)$                  | 30                    |
| 30-88           | 3                 | 40.0                                       | 100                   |
| 88-216          | 3                 | 43.5                                       | 150                   |
| 216-960         | 3                 | 46.0                                       | 200                   |
| Above 960       | 3                 | 54.0                                       | 500                   |


### **TEST RESULTS**

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. All three channels (lowest/middle/highest) of each mode were measured below 1GHz and recorded worst case at 802.11b low channel.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

## For 30MHz-1GHz

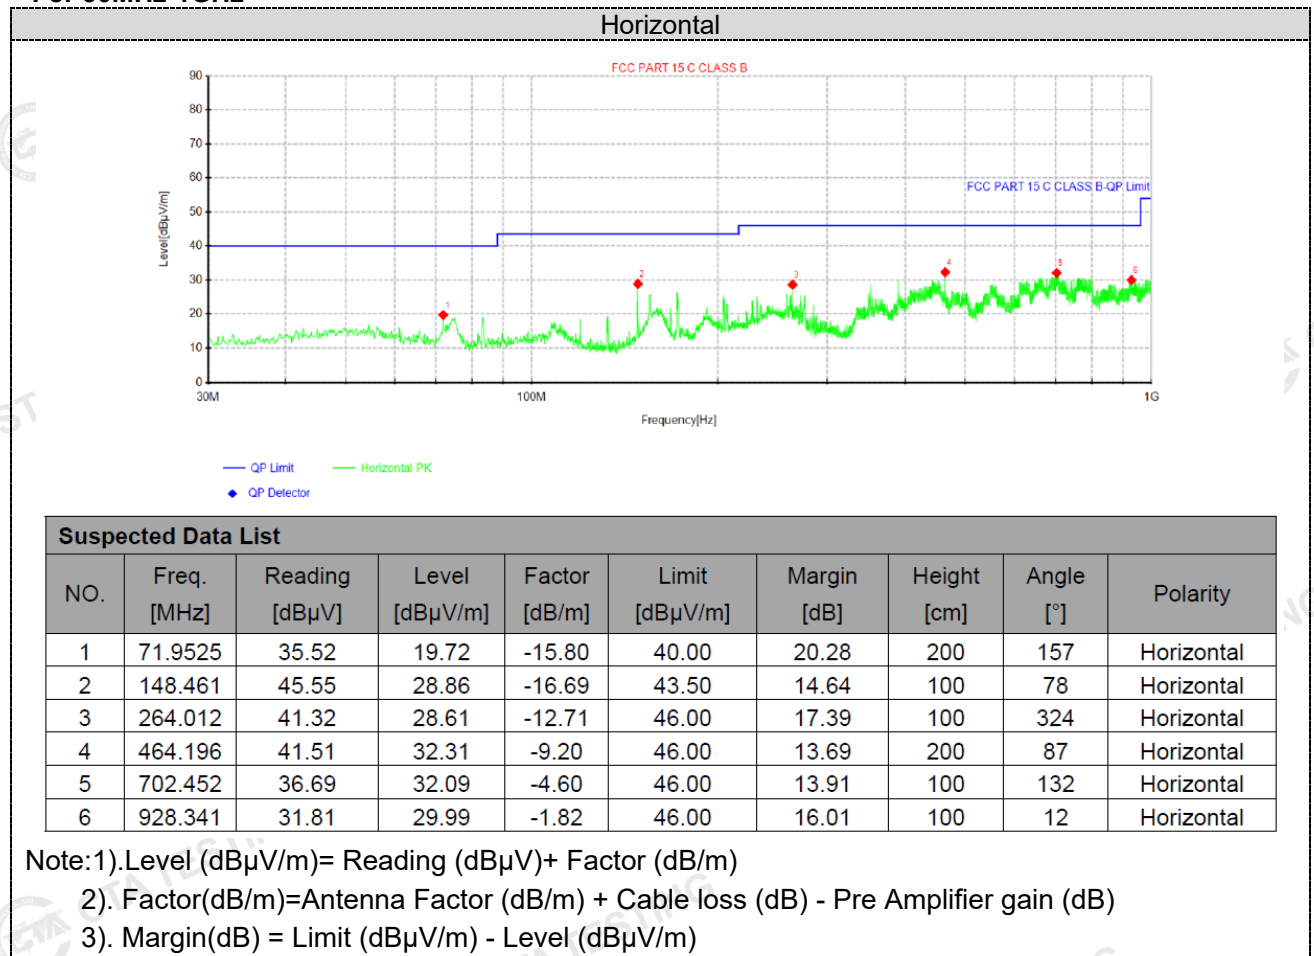

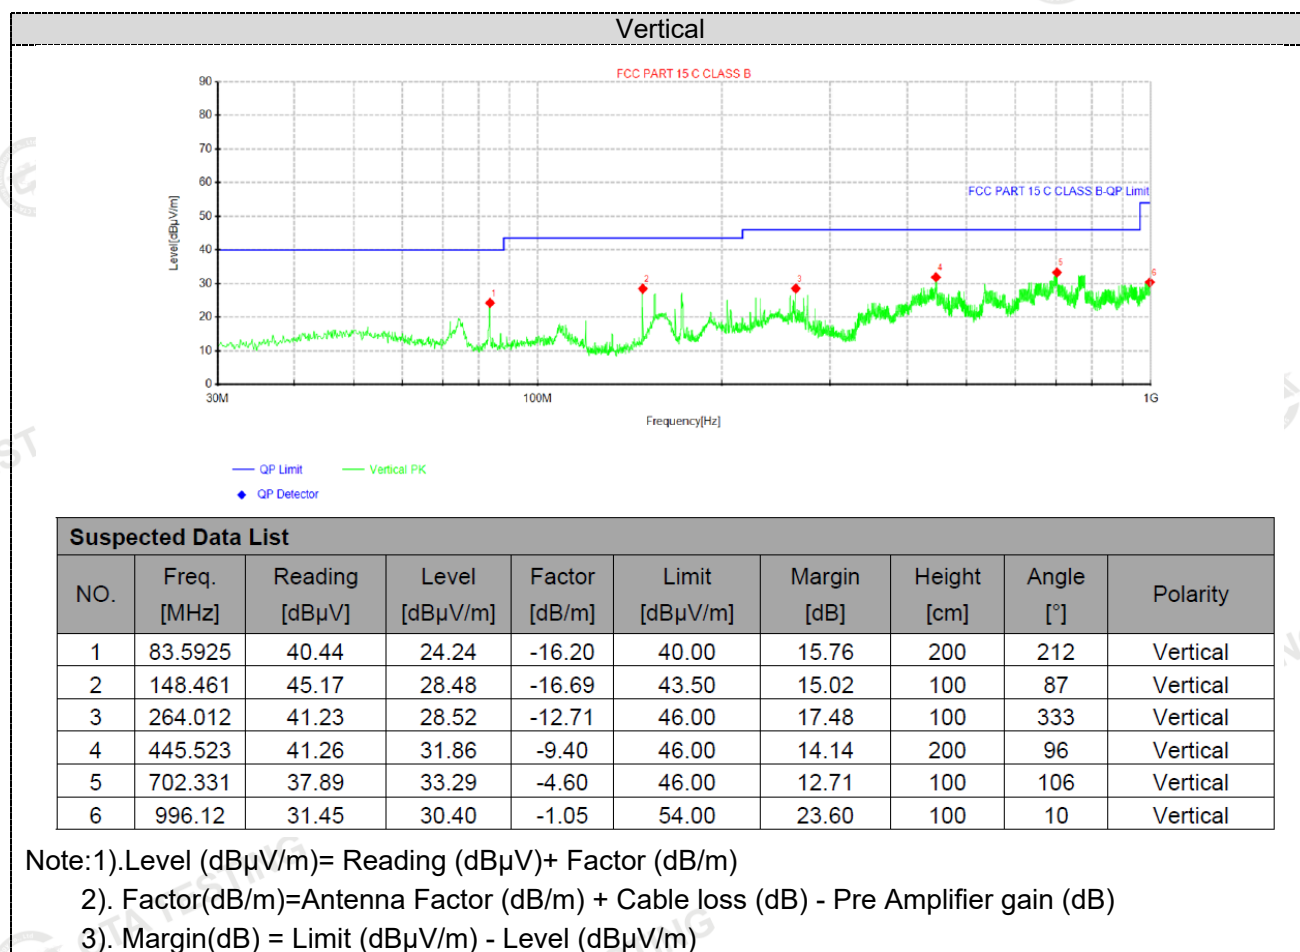

**For 1GHz to 25GHz**

Note: 802.11b/802.11g/802.11n (HT20)/802.11n (HT40) Mode all have been tested, only worse case 802.11n20 mode is reported

(above 1GHz)

| Frequency(MHz): |                         |    | 2412           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4824.00         | 62.01                   | PK | 74             | 11.99       | 66.37            | 32.4                  | 5.11              | 41.87              | -4.36                    |
| 4824.00         | 45.77                   | AV | 54             | 8.23        | 50.13            | 32.4                  | 5.11              | 41.87              | -4.36                    |
| 7236.00         | 54.25                   | PK | 74             | 19.75       | 54.88            | 36.58                 | 6.43              | 43.64              | -0.63                    |
| 7236.00         | 43.46                   | AV | 54             | 10.54       | 44.09            | 36.58                 | 6.43              | 43.64              | -0.63                    |

| Frequency(MHz): |                         |    | 2412           |             | Polarity:        |                       | VERTICAL          |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4824.00         | 60.30                   | PK | 74             | 13.70       | 64.66            | 32.4                  | 5.11              | 41.87              | -4.36                    |
| 4824.00         | 44.19                   | AV | 54             | 9.81        | 48.55            | 32.4                  | 5.11              | 41.87              | -4.36                    |
| 7236.00         | 52.50                   | PK | 74             | 21.50       | 53.13            | 36.58                 | 6.43              | 43.64              | -0.63                    |
| 7236.00         | 41.63                   | AV | 54             | 12.37       | 42.26            | 36.58                 | 6.43              | 43.64              | -0.63                    |

| Frequency(MHz): |                         |    | 2437           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4874.00         | 61.33                   | PK | 74             | 12.67       | 65.28            | 32.56                 | 5.34              | 41.85              | -3.95                    |
| 4874.00         | 44.89                   | AV | 54             | 9.11        | 48.84            | 32.56                 | 5.34              | 41.85              | -3.95                    |
| 7311.00         | 53.44                   | PK | 74             | 20.56       | 53.80            | 36.54                 | 6.81              | 43.71              | -0.36                    |
| 7311.00         | 42.87                   | AV | 54             | 11.13       | 43.23            | 36.54                 | 6.81              | 43.71              | -0.36                    |

| Frequency(MHz): |                         |    | 2437           |             | Polarity:        |                       | VERTICAL          |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4874.00         | 59.76                   | PK | 74             | 14.24       | 63.71            | 32.56                 | 5.34              | 41.85              | -3.95                    |
| 4874.00         | 43.16                   | AV | 54             | 10.84       | 47.11            | 32.56                 | 5.34              | 41.85              | -3.95                    |
| 7311.00         | 51.60                   | PK | 74             | 22.40       | 51.96            | 36.54                 | 6.81              | 43.71              | -0.36                    |
| 7311.00         | 41.00                   | AV | 54             | 13.00       | 41.36            | 36.54                 | 6.81              | 43.71              | -0.36                    |

| Frequency(MHz): |                         |    | 2462           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4924.00         | 60.73                   | PK | 74             | 13.27       | 64.19            | 32.73                 | 5.64              | 41.83              | -3.46                    |
| 4924.00         | 44.29                   | AV | 54             | 9.71        | 47.75            | 32.73                 | 5.64              | 41.83              | -3.46                    |
| 7386.00         | 52.59                   | PK | 74             | 21.41       | 52.65            | 36.5                  | 7.23              | 43.79              | -0.06                    |
| 7386.00         | 42.01                   | AV | 54             | 11.99       | 42.07            | 36.5                  | 7.23              | 43.79              | -0.06                    |

| Frequency(MHz): |                         |    | 2462           |             | Polarity:        |                       | VERTICAL          |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4924.00         | 59.15                   | PK | 74             | 14.85       | 62.61            | 32.73                 | 5.64              | 41.83              | -3.46                    |
| 4924.00         | 42.35                   | AV | 54             | 11.65       | 45.81            | 32.73                 | 5.64              | 41.83              | -3.46                    |
| 7386.00         | 50.80                   | PK | 74             | 23.20       | 50.86            | 36.5                  | 7.23              | 43.79              | -0.06                    |
| 7386.00         | 40.13                   | AV | 54             | 13.87       | 40.19            | 36.5                  | 7.23              | 43.79              | -0.06                    |

- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) The other emission levels were very low against the limit.
- 4) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

#### Results of Band Edges Test (Radiated)

Note: 802.11b/802.11g/802.11n (HT20)/802.11n (HT40) Mode all have been tested, only worse case 802.11n20 mode is reported

| Frequency(MHz): |                         |    | 2412           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2390.00         | 61.93                   | PK | 74             | 12.07       | 72.35            | 27.42                 | 4.31              | 42.15              | -10.42                   |
| 2390.00         | 42.52                   | AV | 54             | 11.48       | 52.94            | 27.42                 | 4.31              | 42.15              | -10.42                   |
| Frequency(MHz): |                         |    | 2412           |             | Polarity:        |                       | VERTICAL          |                    |                          |
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2390.00         | 60.34                   | PK | 74             | 13.66       | 70.76            | 27.42                 | 4.31              | 42.15              | -10.42                   |
| 2390.00         | 40.90                   | AV | 54             | 13.10       | 51.32            | 27.42                 | 4.31              | 42.15              | -10.42                   |
| Frequency(MHz): |                         |    | 2462           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2483.50         | 61.16                   | PK | 74             | 12.84       | 71.27            | 27.7                  | 4.47              | 42.28              | -10.11                   |
| 2483.50         | 42.00                   | AV | 54             | 12.00       | 52.11            | 27.7                  | 4.47              | 42.28              | -10.11                   |
| Frequency(MHz): |                         |    | 2462           |             | Polarity:        |                       | VERTICAL          |                    |                          |
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2483.50         | 59.60                   | PK | 74             | 14.40       | 69.71            | 27.7                  | 4.47              | 42.28              | -10.11                   |
| 2483.50         | 40.14                   | AV | 54             | 13.86       | 50.25            | 27.7                  | 4.47              | 42.28              | -10.11                   |

Note:

- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) The other emission levels were very low against the limit.
- 4) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

### 4.3 Maximum Peak Conducted Output Power

#### Limit

The Maximum Peak Output Power Measurement is 30dBm.

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Method PM is Measurement using an RF Peak power sensor. The procedure for this method is as follows:

1. The testing follows the ANSI C63.10 Section 11.9.1.2
2. The maximum peak conducted output power may be measured using a broadband peak RF power sensor.
3. The power sensor shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

#### Test Configuration



#### Test Results

Please refer to FCC Appendix RF Test Data for 2.4GWIFI

Note:

- 1) Measured output power at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss.
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; MCS0 at IEEE 802.11n HT20; MCS0 at IEEE 802.11n HT40;

## 4.4 Power Spectral Density

### Limit


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### Test Procedure

The testing follows the ANSI C63.10 2020 section 11.10.2:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span >1.5 times the DTS bandwidth.
- c) Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- e) Detector = peak.
- f) Sweep time = No faster than coupled (auto) time.
- g) Trace mode = max-hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

### Test Configuration



### Test Results

Please refer to FCC Appendix RF Test Data for 2.4GWIFI

Note:

- 1) Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss;
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; MCS0 at IEEE 802.11n HT20; MCS0 at IEEE 802.11n HT40;

## 4.5 6dB Bandwidth

### Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

### Test Procedure

- a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- b) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.

### Test Configuration



### Test Results

Please refer to FCC Appendix RF Test Data for 2.4GWIFI

Note:

- 1) Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss;
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; MCS0 at IEEE 802.11n HT20; MCS0 at IEEE 802.11n HT40;

## 4.6 Out-of-band Emissions

### Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### Test Procedure

The testing follows the ANSI C63.10 Section 11.11.2 and 11.11.3 and 6.10.4:

#### ●Reference level measurement

Establish a reference level by using the following procedure:

- Set instrument center frequency to DTS channel center frequency.
- Set the span to  $\geq 1.5$  times the DTS bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW  $\geq [3 \times \text{RBW}]$ .
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

#### ●Emission level measurement

Establish an emission level by using the following procedure:

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW  $\geq [3 \times \text{RBW}]$ .
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

### Test Configuration



### Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandage measurement data. And record the worst data in the report.

Please refer to FCC Appendix RF Test Data for 2.4GWIFI

## 4.7 Antenna Requirement

### Standard Applicable

**For intentional device, according to FCC 47 CFR Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

**FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):**

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### Test Result:

The PIFA antenna maximum gain of antenna was 2.24 dBi.


Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen CTA Testing Technology Co., Ltd. does not assume any responsibility.

#### 4.8 On Time and Duty Cycle

##### Standard Applicable

None; for reporting purpose only.

##### TEST CONFIGURATION





##### Test Procedures

- 1). Set the Centre frequency of the spectrum analyzer to the transmitting frequency;
- 2). Set the span=0MHz, RBW=8MHz, VBW=8MHz, Sweep time=Auto;
- 3). Detector = peak;
- 4). Trace mode = Single hold.

##### TEST RESULTS

Please refer to FCC Appendix RF Test Data for 2.4GWIFI  
Duty Cycle= Transmission Duration/ Transmission Period

## 5 Test Setup Photos of the EUT

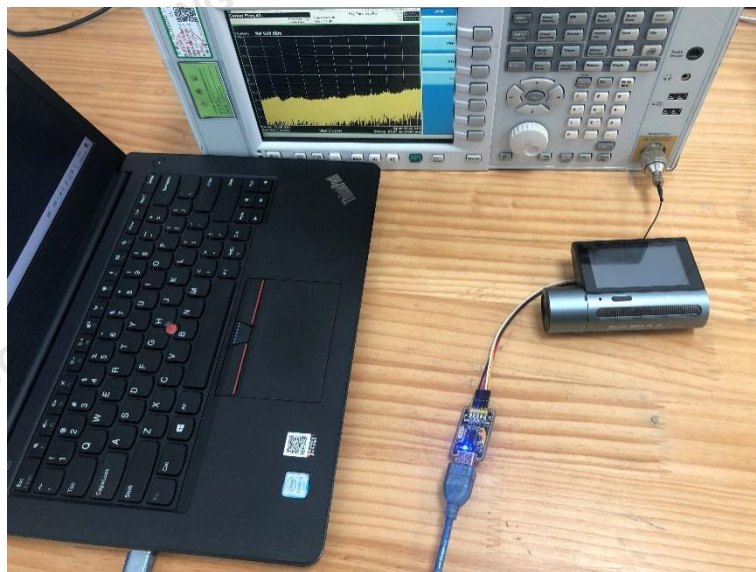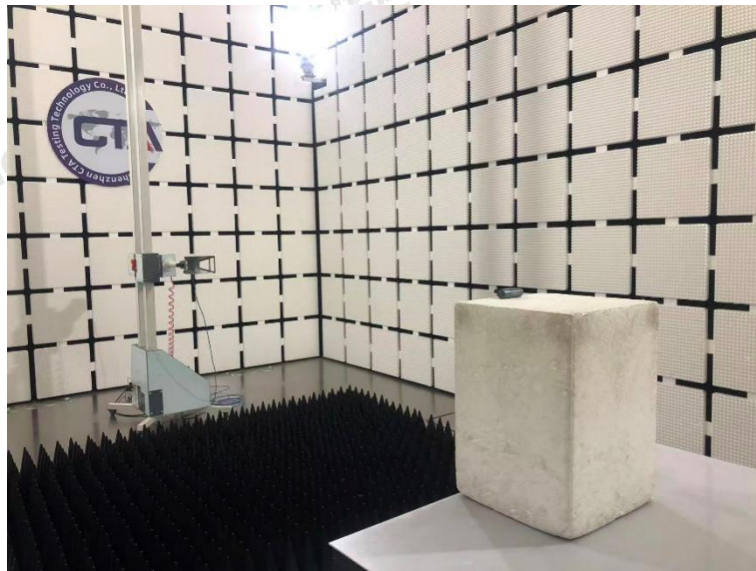

**Shenzhen CTA Testing Technology Co., Ltd.**



Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China  
Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn



## 6 Photos of the EUT

















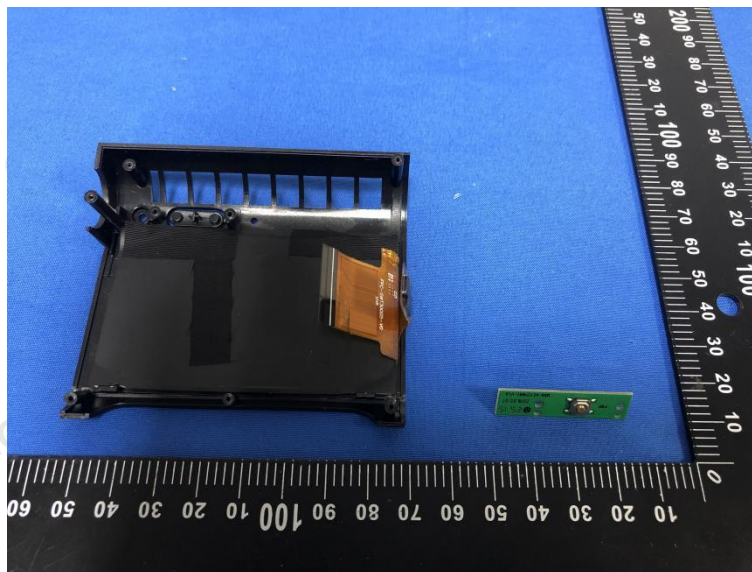
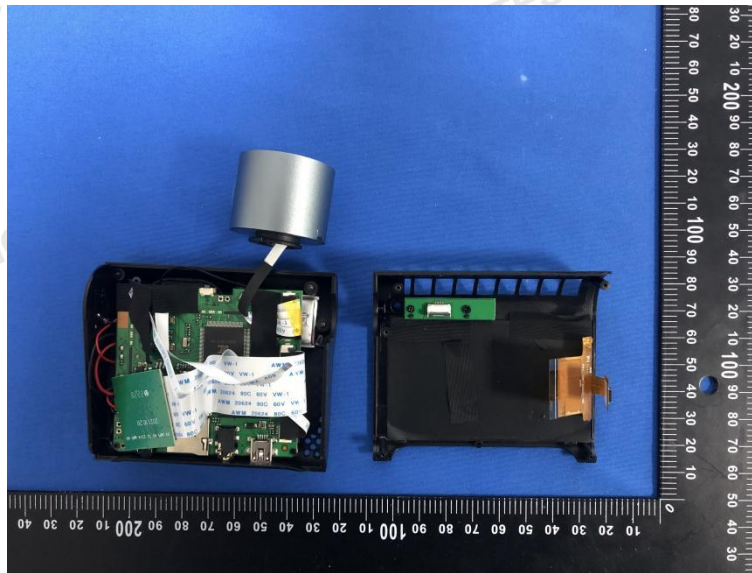


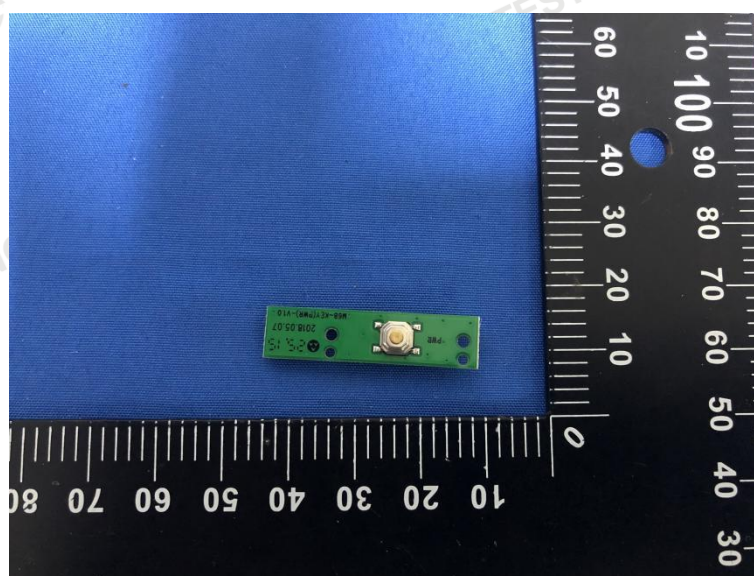
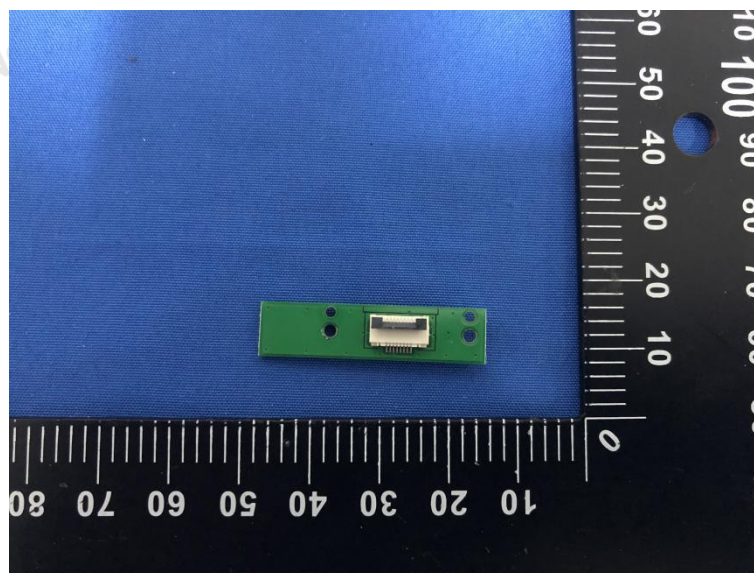


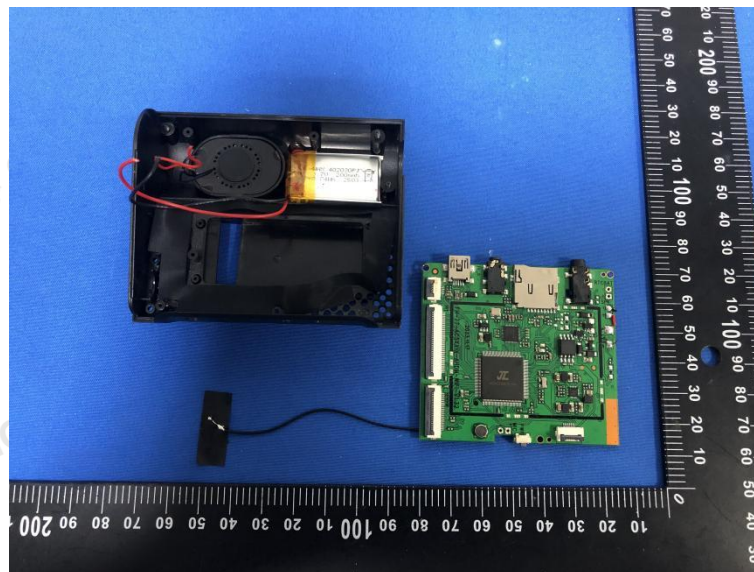
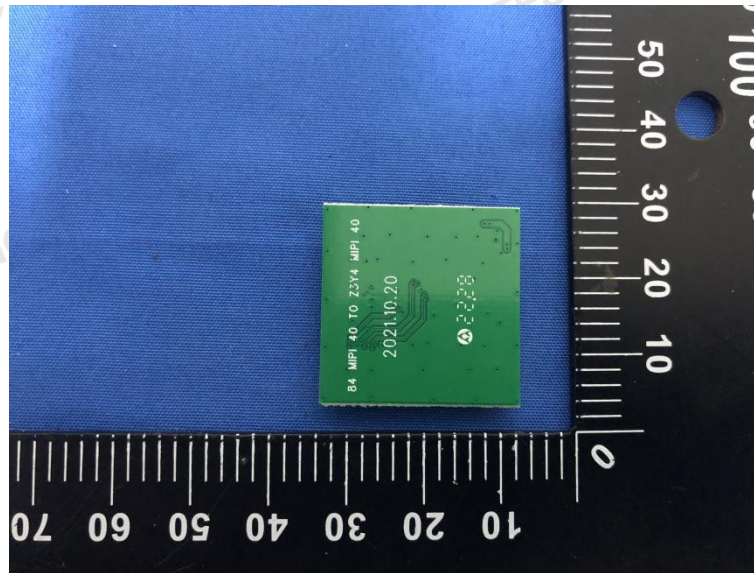
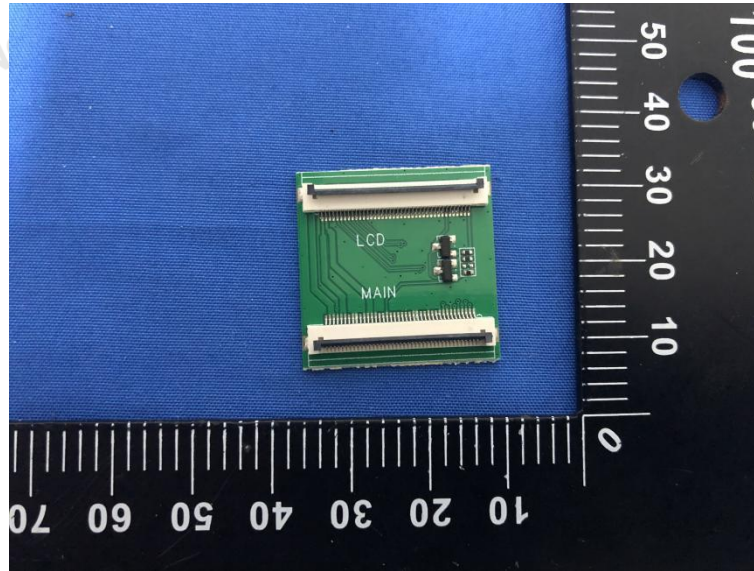


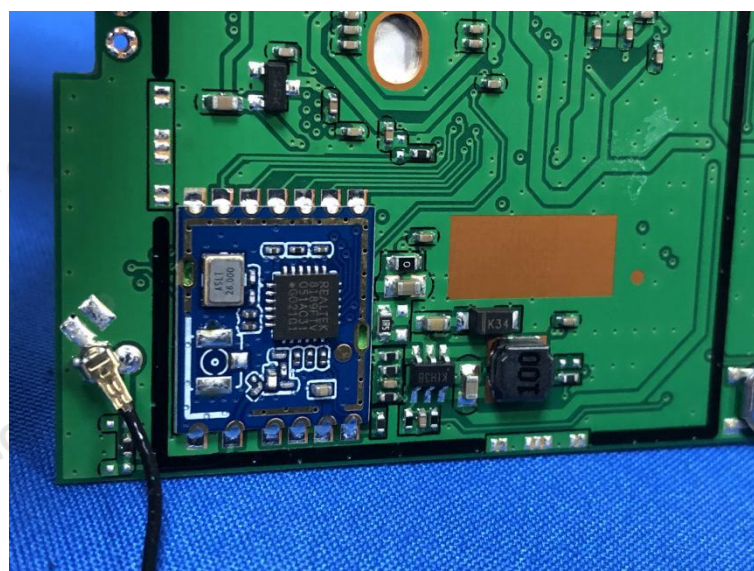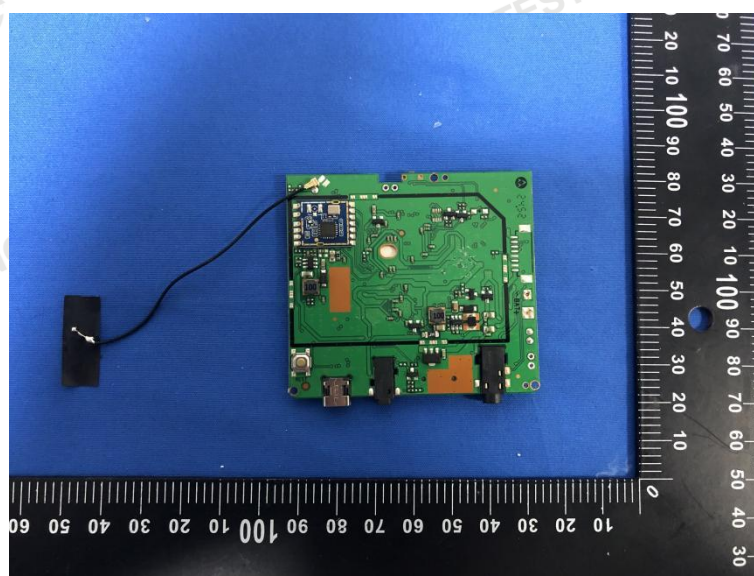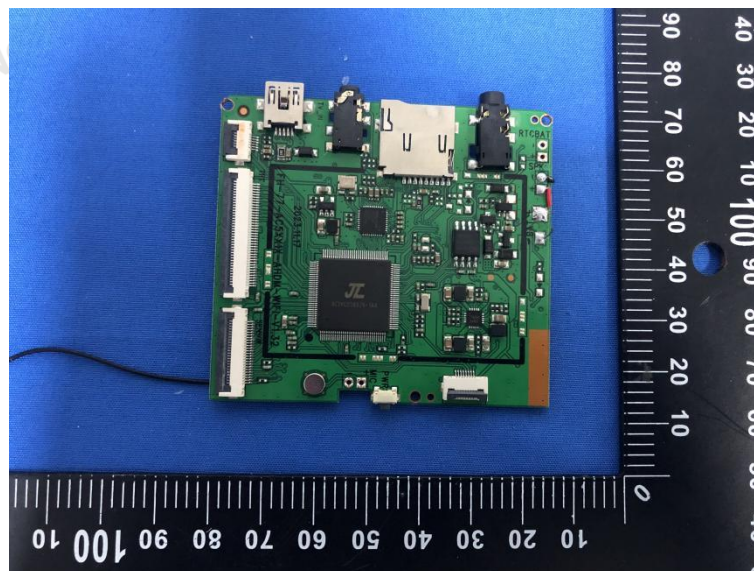

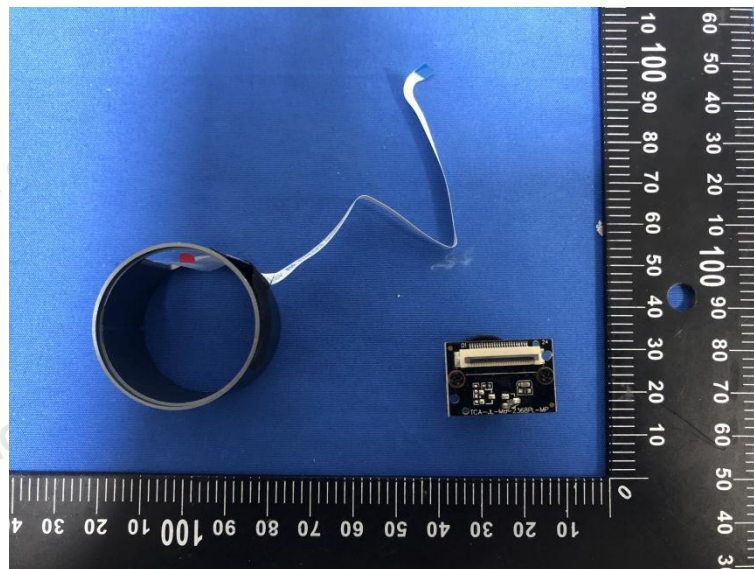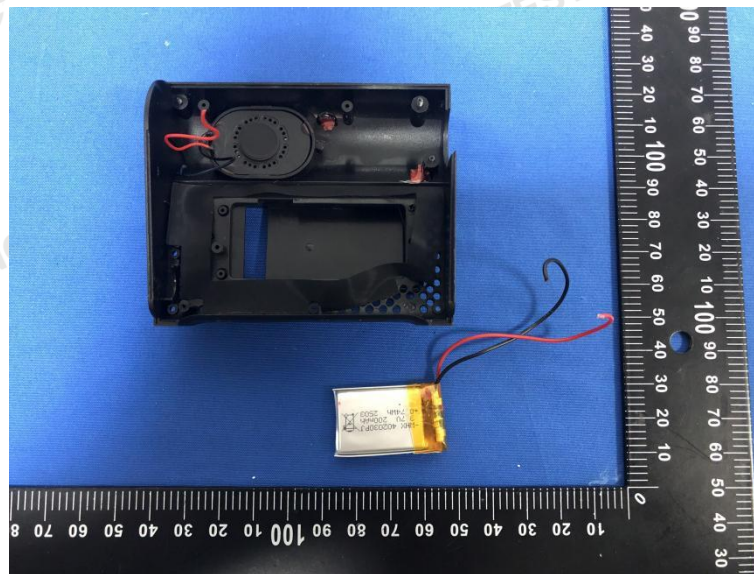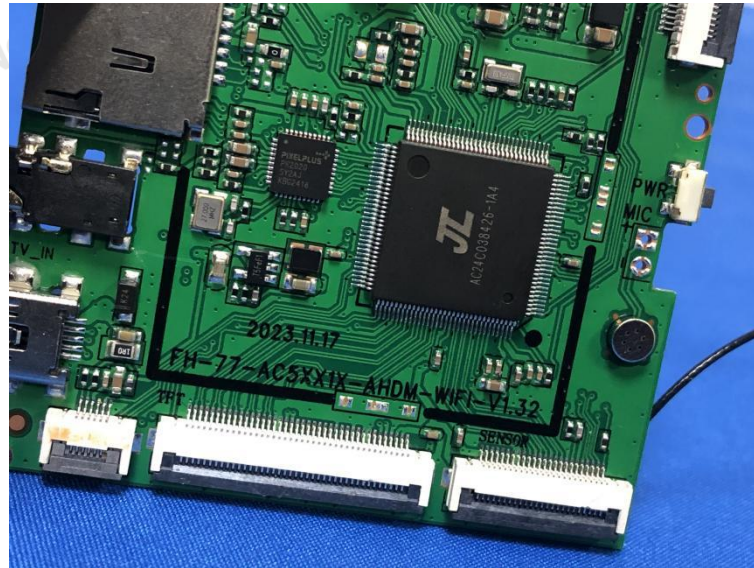

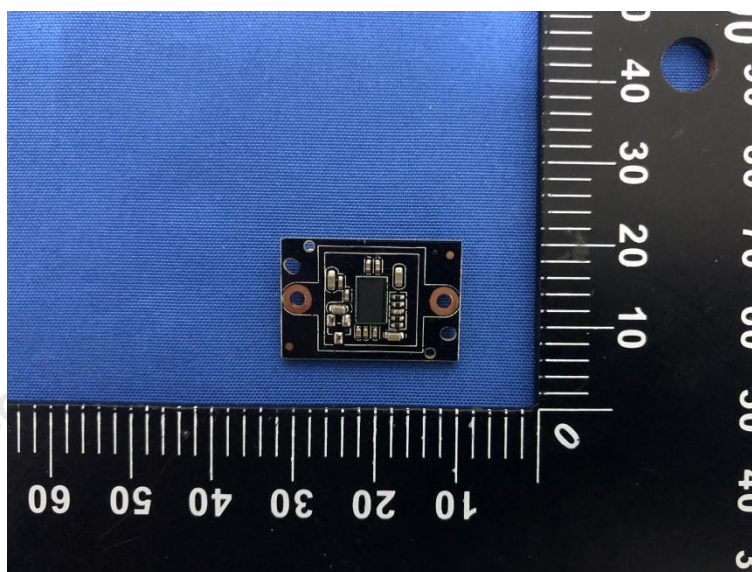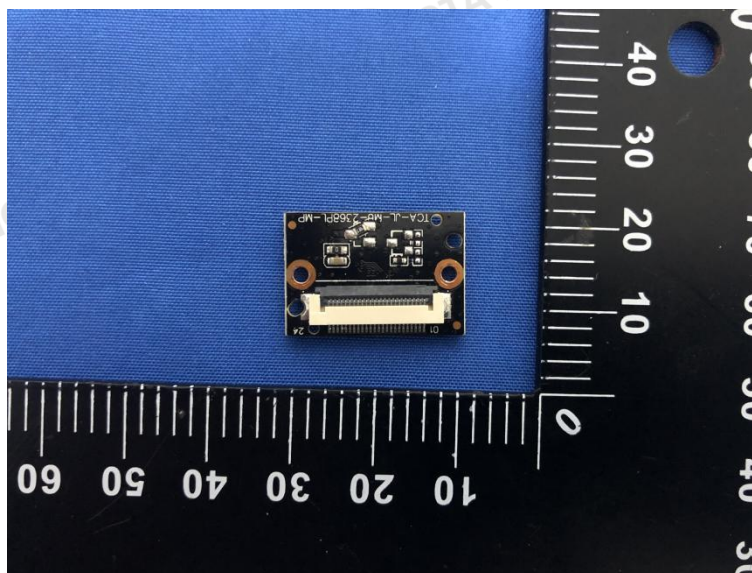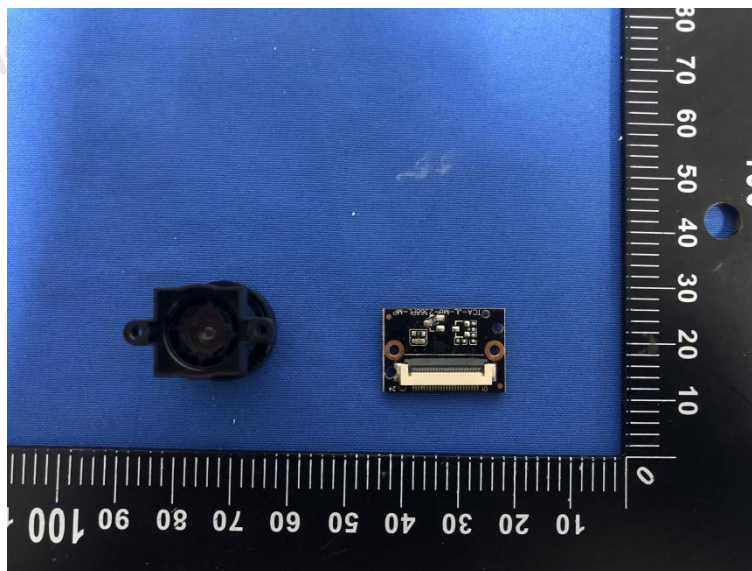

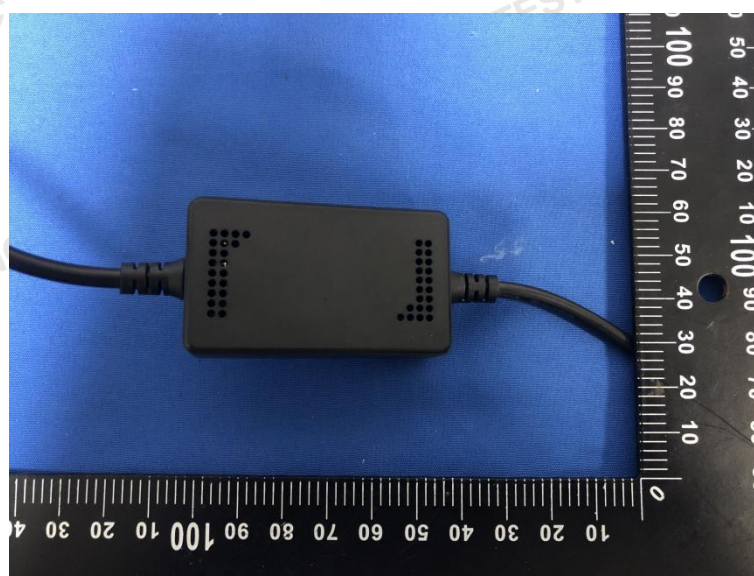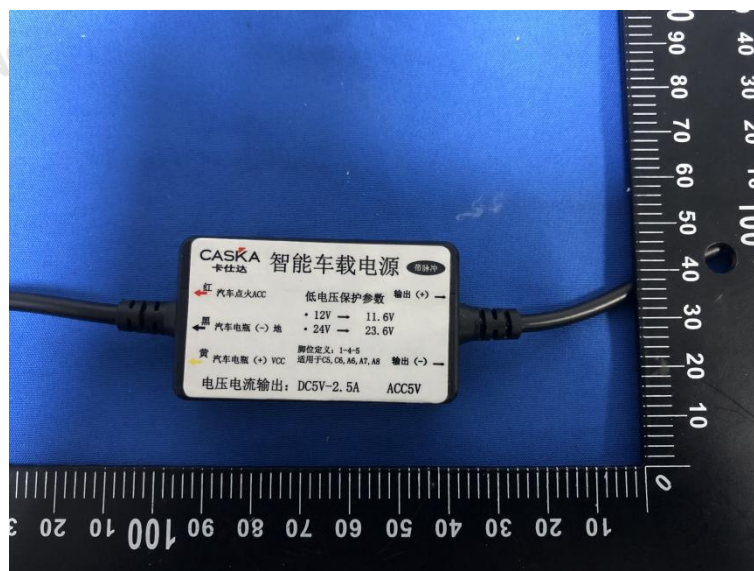

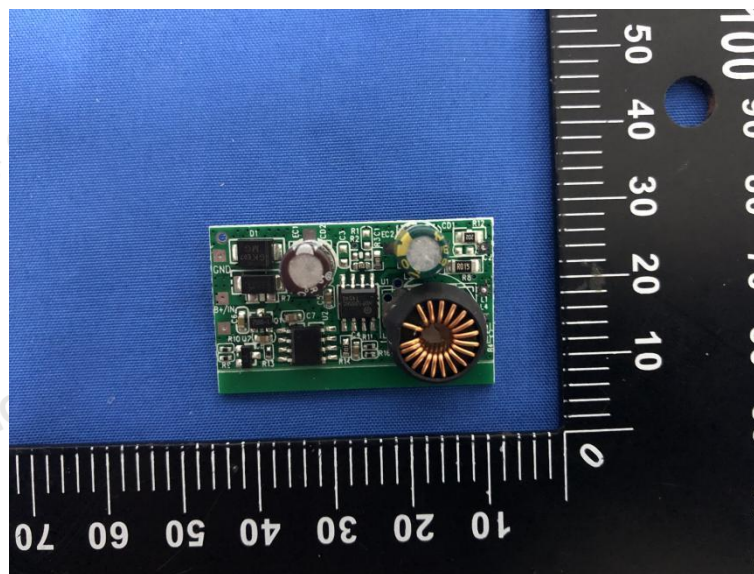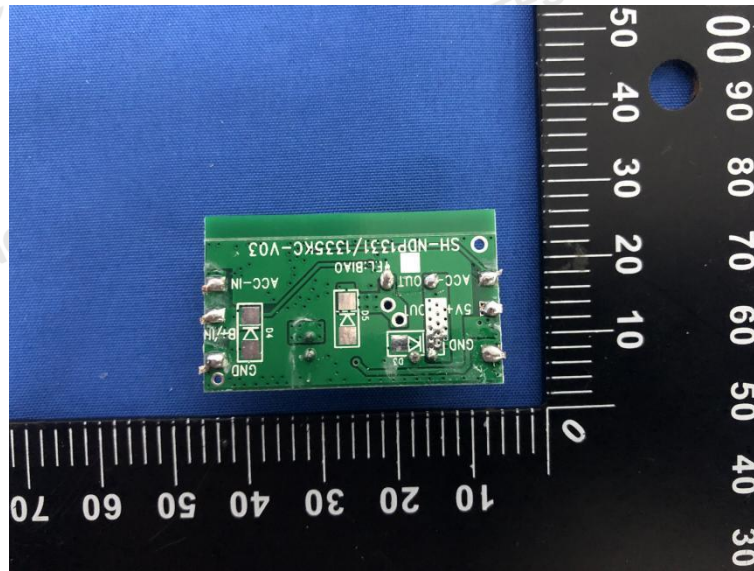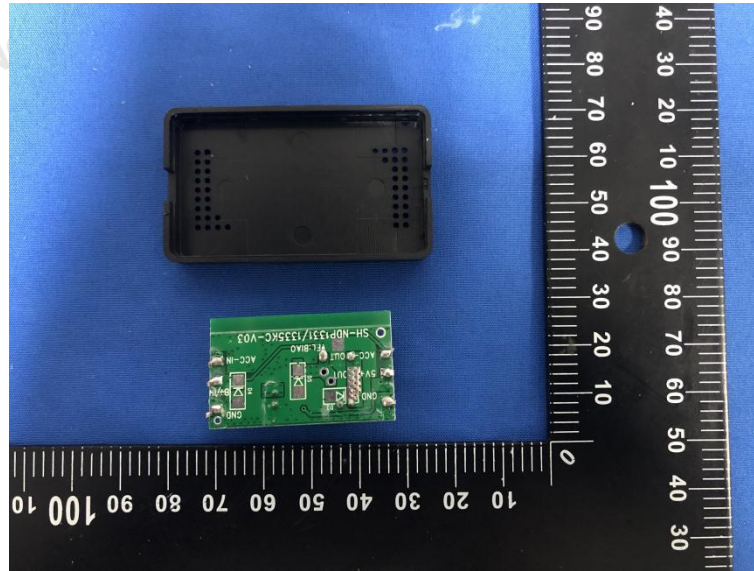



\*\*\*\*\* End of Report \*\*\*\*\*