

TEST REPORT

Test report no.: 1-0243-25-02-03_TR1-R01



Deutsche
Akkreditierungsstelle
D-PL-12047-01-00

Testing laboratory

cetecom advanced GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://cetecomadvanced.com>

e-mail: mail@cetecomadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS).

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number:

D-PL-12047-01-00.

ISED Testing Laboratory Recognized Listing Number: DE0001

FCC designation number: DE0002

Applicant

Guide ID BV

Leeuwenbrug 117

7411 TH Deventer / NETHERLANDS

Phone: -/-

Contact: Richard Hup

e-mail: richardhup@guide-id.com

Manufacturer

Guide ID BV

Leeuwenbrug 117

7411 TH Deventer / NETHERLANDS

Test standard/s

FCC - Title 47 CFR Part 15 FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 247 Issue 4 Digital Transmission Systems, Frequency Hopping Systems and Licence-Exempt Local Area Network Devices in 902-928 MHz, 2400-2483.5 MHz, 5150-5350 MHz, and 5470-5895 MHz bands

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Audio/Video sync box
Model name: Brainbox
FCC ID: Contains FCC ID: QQQWFM200
ISED certification number: Contains IC: 5123A-WFM200
Frequency: 2400 MHz to 2483.5 MHz
Technology tested: WLAN
Antenna: Integrated antenna
Power supply: 5.0 V DC by USB interface
Temperature range: 0°C to +45°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:



Michael Dorongovski
Lab Manager
Radio Labs

Test performed:



Andreas Curette
Lab Manager
Radio Labs

1 Table of contents

1	Table of contents.....	2
2	General information.....	3
2.1	Notes and disclaimer	3
2.2	Application details	3
2.3	Test laboratories sub-contracted	3
3	Test standard/s, references and accreditations	4
4	Reporting statements of conformity – decision rule	5
5	Test environment	6
6	Test item	6
6.1	General description	6
6.2	Additional information	6
7	Sequence of testing.....	7
7.1	Sequence of testing radiated spurious 1 GHz to 18 GHz	7
8	Description of the test setup.....	8
8.1	Shielded fully anechoic chamber.....	9
9	Measurement uncertainty.....	10
10	Summary of measurement results	11
11	Additional information and comments	12
12	Additional EUT parameter	13
13	Measurement results	14
13.1	Band edge compliance radiated.....	14
13.2	Spurious emissions radiated above 1 GHz	16
14	Observations.....	18
15	Glossary.....	19
16	Document history	20

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. cetecom advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced GmbH.

The testing service provided by cetecom advanced GmbH has been rendered under the current "General Terms and Conditions for cetecom advanced GmbH".

cetecom advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced GmbH test report include or imply any product or service warranties from cetecom advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced GmbH.

All rights and remedies regarding vendor's products and services for which cetecom advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2025-08-15
Date of receipt of test item:	2025-10-27
Start of test:*	2025-11-06
End of test:*	2025-11-10
Person(s) present during the test:	Mr. Richard Hup

*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

2.3 Test laboratories sub-contracted

None

3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 15		FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 247 Issue 4	July 2025	Digital Transmission Systems, Frequency Hopping Systems and Licence-Exempt Local Area Network Devices in 902-928 MHz, 2400-2483.5 MHz, 5150-5350 MHz, and 5470-5895 MHz bands
RSS - Gen Issue 5 incl. Amendment 1 & 2	February 2021	Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus


Guidance	Version	Description
KDB 558074 D01	v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
ANSI C63.4a-2017	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2020	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 996369 D04	v02	MODULAR TRANSMITTER INTEGRATION GUIDE GUIDANCE FOR HOST PRODUCT MANUFACTURERS

4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

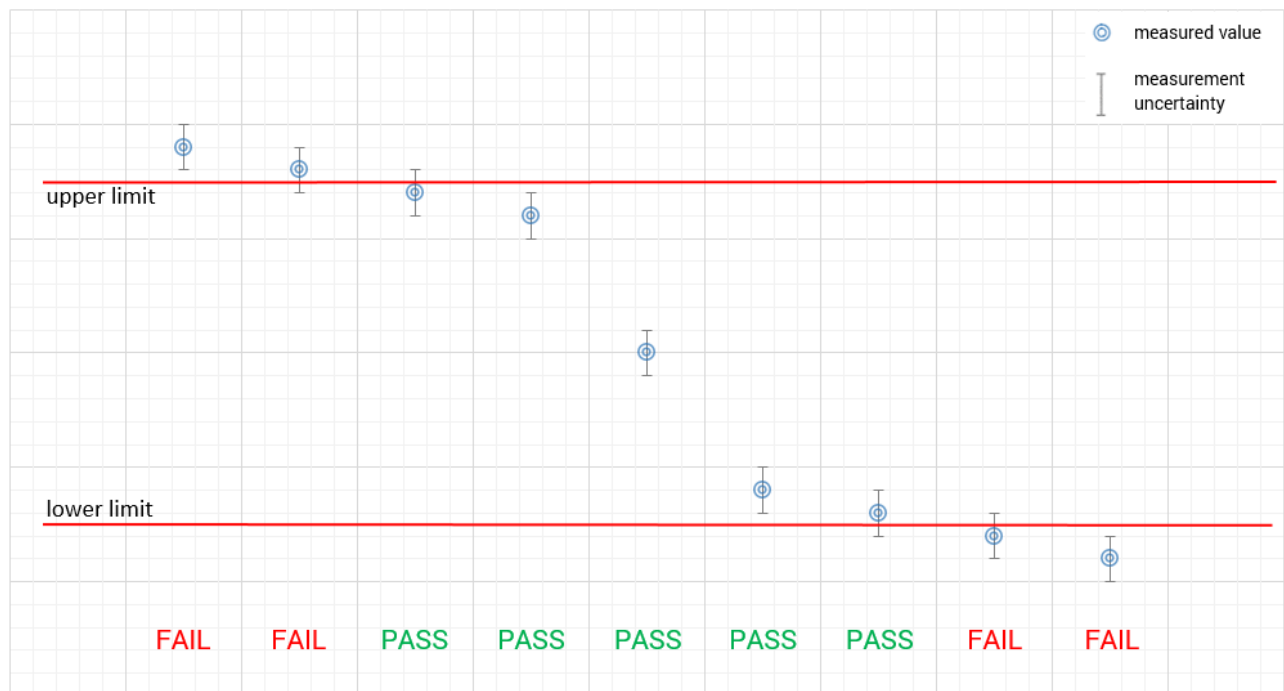

5 Test environment

Temperature	:	T_{nom} T_{max} T_{min}	+20 °C during room temperature tests No tests under extreme temperature conditions required. No tests under extreme temperature conditions required.
Relative humidity content	:		55 %
Barometric pressure	:		1021 hpa
Power supply	:	V_{nom} V_{max} V_{min}	5.0 V DC by USB interface No tests under extreme voltage conditions required. No tests under extreme voltage conditions required.

6 Test item

6.1 General description

Kind of test item	:	Audio/Video sync box
Model name	:	Brainbox
HMN	:	N/A
PMN	:	Brainbox
HVIN	:	BB
FVIN	:	N/A
S/N serial number	:	Rad.: bb000220
Hardware status	:	2.2
Software status	:	2.5
Firmware status	:	-/-
Frequency band	:	2400 MHz to 2483.5 MHz
Type of radio transmission	:	DSSS, OFDM
Use of frequency spectrum	:	
Type of modulation	:	CCK, (D)BPSK, (D)QPSK, 16 – QAM, 64 – QAM
Number of channels	:	11
Antenna	:	Integrated antenna
Power supply	:	4.75 V to 5.25 V DC by USB interface
Temperature range	:	0°C to +45°C

6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

1-0243-25-01-01_TR1-A101-R01
1-0243-25-01-01_TR1-A102-R01
1-0243-25-01-01_TR1-A104-R01

7 Sequence of testing

7.1 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).


Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

Agenda: Kind of Calibration

k/cal	calibration / calibrated
Ne/cnn	not required (k, ev, izw, zw not required)
Ev/chk	periodic self verification
Ve	long-term stability recognized
vlk!	Attention: extended calibration interval
NK!	Attention: not calibrated
cpu	check prior usage

EK	limited calibration
zw	cyclical maintenance (external cyclical maintenance)
izw	internal cyclical maintenance
g	blocked for accredited testing
*)	next calibration ordered / currently in progress

8.1 Shielded fully anechoic chamber

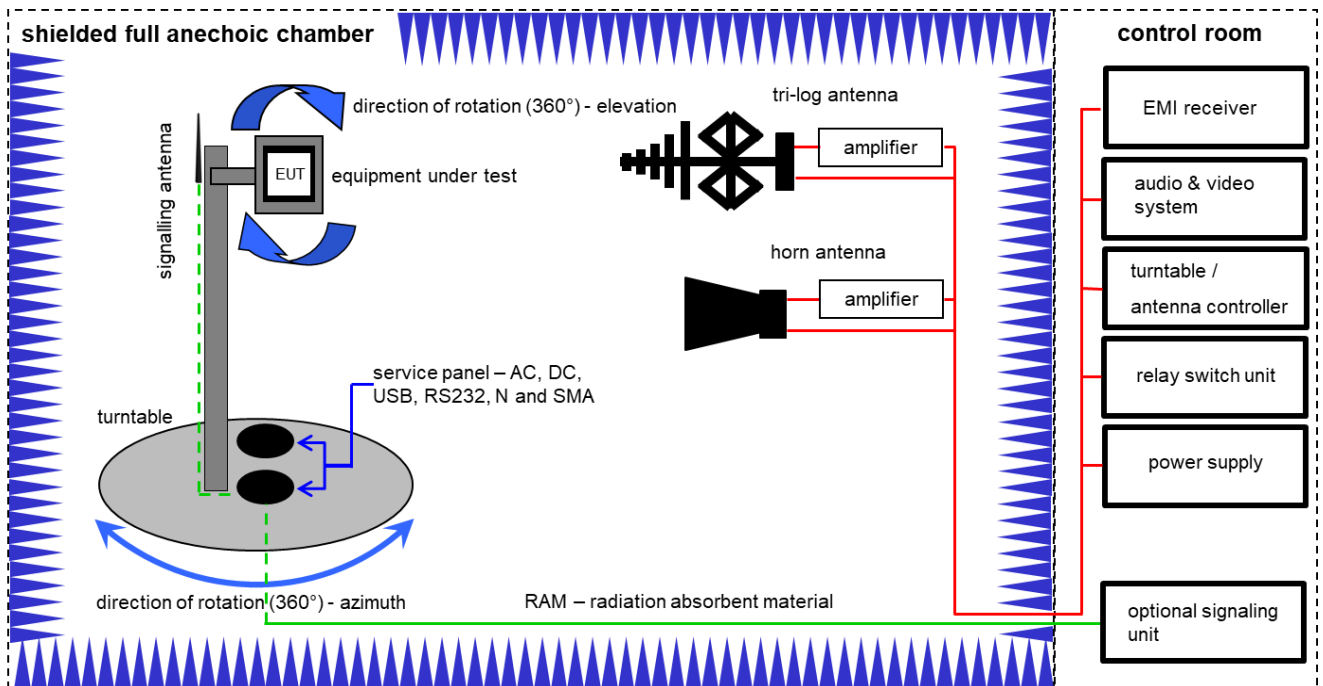

Measurement distance: tri-log antenna and horn antenna 3 meter

FS = UR + CA + AF

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:

FS [dBμV/m] = 40.0 [dBμV] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dBμV/m] (71.61 μV/m) @ distance

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A,B	High Pass Filter	High Pass Filter VHF-3500+	Mini-Circuits / Brooklyn	-/-	40369	cnn	-/-	-/-
2	A,B	Signal analyzer	Signal analyzer FSW26	Rohde & Schwarz Messgerätebau GmbH / Memmingen	101455	40114	cal	09.12.2024	09.12.2025
3	A,B	Double-Ridged Waveguide Horn Antenna	Double-Ridged Waveguide Horn Antenna 3115	EMCO Elektronik GmbH / Gilching	8812-3089	40344	cal	09.07.2024	09.07.2026
4	A,B	Highpass Filter	Highpass Filter WHKX7.0/18G-8SS	Wainwright Instruments GmbH / Andechs	18	40364	cpu	-/-	-/-
5	B	Band Reject Filter	Band Reject Filter WRCG2400/2483-2375/2505-50/10SS	Wainwright Instruments GmbH / Andechs	26	40367	cpu	-/-	-/-
6	A,B	Broadband Amplifier 0.5-18 GHz	Broadband Amplifier 0.5-18 GHz CBLU5184540	MEC Import: CERNEX	22050	40374	cpu	-/-	-/-
7	A,B	4U RF Switch Platform	4U RF Switch Platform L4491A	Agilent Technologies Deutschland GmbH / Böblingen	MY50000032	40376	cnn	-/-	-/-
8	A,B	NEXIO EMV-Software	NEXIO EMV-Software BAT EMC V2022.0.32.0	MEC Import: Nexio		40383	cnn	-/-	-/-
9	A,B	Anechoic chamber	Anechoic chamber	MEC Import: TDK		40385	cnn	-/-	-/-

9 Measurement uncertainty

Measurement uncertainty		
Test case	Uncertainty	
Antenna gain	± 3 dB	
Power spectral density	± 1.56 dB	
DTS bandwidth	± 100 kHz (depends on the used RBW)	
Occupied bandwidth	± 100 kHz (depends on the used RBW)	
Maximum output power conducted	± 1.56 dB	
Detailed spurious emissions @ the band edge - conducted	± 1.56 dB	
Band edge compliance radiated	± 3 dB	
Spurious emissions conducted	> 3.6 GHz	± 1.56 dB
	> 7 GHz	± 1.56 dB
	> 18 GHz	± 2.31 dB
	≥ 40 GHz	± 2.97 dB
Spurious emissions radiated below 30 MHz	± 3 dB	
Spurious emissions radiated 30 MHz to 1 GHz	± 4.1 dB	
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB	
Spurious emissions radiated above 12.75 GHz	± 4.5 dB	
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB	

10 Summary of measurement results

☐	No deviations from the technical specifications were ascertained
☐	There were deviations from the technical specifications ascertained
☒	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS - 247, Issue 4	See table!	2025-12-02	Tests according to customer demand

Test specification clause	Test case	Guideline	Temperature & voltage conditions	C	NC	NA	NP	Remark
§15.247(b)(4) RSS - 247 / 5.4 (f)(ii)	Antenna gain	-/-	Nominal	-/-				-/-
§15.35	Duty cycle	-/-	Nominal	-/-				-/-
§15.247(e) RSS - 247 / 5.2 (b)	Power spectral density	KDB 558074 DTS clause: 8.4	Nominal	☐	☐	☐	☒	-/-
§15.247(a)(2) RSS - 247 / 5.2 (a)	DTS bandwidth	KDB 558074 DTS clause: 8.2	Nominal	☐	☐	☐	☒	-/-
RSS Gen clause 4.6.1	Occupied bandwidth	-/-	Nominal	☐	☐	☐	☒	-/-
§15.247(b)(3) RSS - 247 / 5.4 (d)	Maximum output power	KDB 558074 DTS clause: 8.3.1.3	Nominal	☐	☐	☐	☒	-/-
§15.247(d) RSS - 247 / 5.5	Detailed spurious emissions @ the band edge – cond.	-/-	Nominal	☐	☐	☐	☒	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance rad.	KDB 558074 DTS clause: 8.7.3	Nominal	☒	☐	☐	☐	Only n20-mode CH11 tested
§15.247(d) RSS - 247 / 5.5	TX spurious emissions cond.	KDB 558074 DTS clause: 8.5	Nominal	☐	☐	☐	☒	-/-
§15.209(a) RSS-Gen	TX spurious emissions rad. below 30 MHz	-/-	Nominal	☐	☐	☐	☒	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions rad. 30 MHz to 1 GHz	-/-	Nominal	☐	☐	☐	☒	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions rad. above 1 GHz	-/-	Nominal	☒	☐	☐	☐	Only Sub-range 1 GHz to 18 GHz b-mode CH6 tested
§15.107(a) §15.207	Conducted emissions < 30 MHz	-/-	Nominal	☐	☐	☐	☒	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
----------	-----------	-----------	---------------	-----------	----------------	-----------	---------------

11 Additional information and comments

Reference documents: None

Co-applicable documents: None

Special test descriptions: Power settings:

Channel	1 / 6 / 11
DSSS / b – mode	dut.regulatory_mode('FCC')
OFDM / n HT20 – mode	dut.regulatory_mode('FCC')

Configuration descriptions: None

EUT selection:

☐ Only one device available

☒ Devices selected by the customer

☐ Devices selected by the laboratory (Randomly)

Provided channels:

Channels with 20 MHz channel bandwidth:

channel number & center frequency													
channel	1	2	3	4	5	6	7	8	9	10	11	12	13
f _c / MHz	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472

Note: The channels used for the tests are marked in bold in the list.

12 Additional EUT parameter

- Test mode:
- ☐ No test mode available
Iperf was used to ping another device with the largest support packet size
 - ☒ Test mode available
Special software is used.
EUT is transmitting pseudo random data by itself
- Modulation types:
- ☒ Wide Band Modulation (None Hopping – e.g. DSSS, OFDM)
 - ☐ Frequency Hopping Spread Spectrum (FHSS)
- Antennas and transmit operating modes:
- ☒ Operating mode 1 (single antenna)
 - *Equipment with 1 antenna,*
 - *Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,*
 - *Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)*
 - ☐ Operating mode 2 (multiple antennas, no beamforming)
 - *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.*
 - ☐ Operating mode 3 (multiple antennas, with beamforming)
 - *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.*

13 Measurement results

13.1 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to the lowest channel for the lower restricted band and to the highest channel for the upper restricted band. Measurement distance is 3 meter.

Measurement:

	Measurement parameter for peak measurements	Measurement parameter for average measurements
		According to DTS clause: 8.7.3
Detector	Peak	RMS
Sweep time	Auto	Auto
Resolution bandwidth	1 MHz	100 kHz
Video bandwidth	3 MHz	300 kHz
Span	See plot	2 MHz
Trace mode	Max. hold	RMS Average over 101 sweeps
Analyzer function	-/-	Band power function (Compute the power by integrating the spectrum over 1 MHz)
Test setup	See chapter 8.1 setup A	
Measurement uncertainty	See chapter 9	

Limits:


FCC	ISED
74 dB μ V/m @ 3 m (Peak) 54 dB μ V/m @ 3 m (AVG)	

Results:

band edge compliance radiated / (dB μ V / m) @ 3 m			
	DSSS / b – mode	OFDM / g – mode	OFDM / n HT20 – mode
Lower band edge	-/-	-/-	-/-
Upper band edge	-/-	-/-	66.5 (Peak) 50.4 (AVG)

Plots: OFDM / n HT20 – mode - peak / average

Plot 1: TX mode, upper band edge, vertical & horizontal polarization

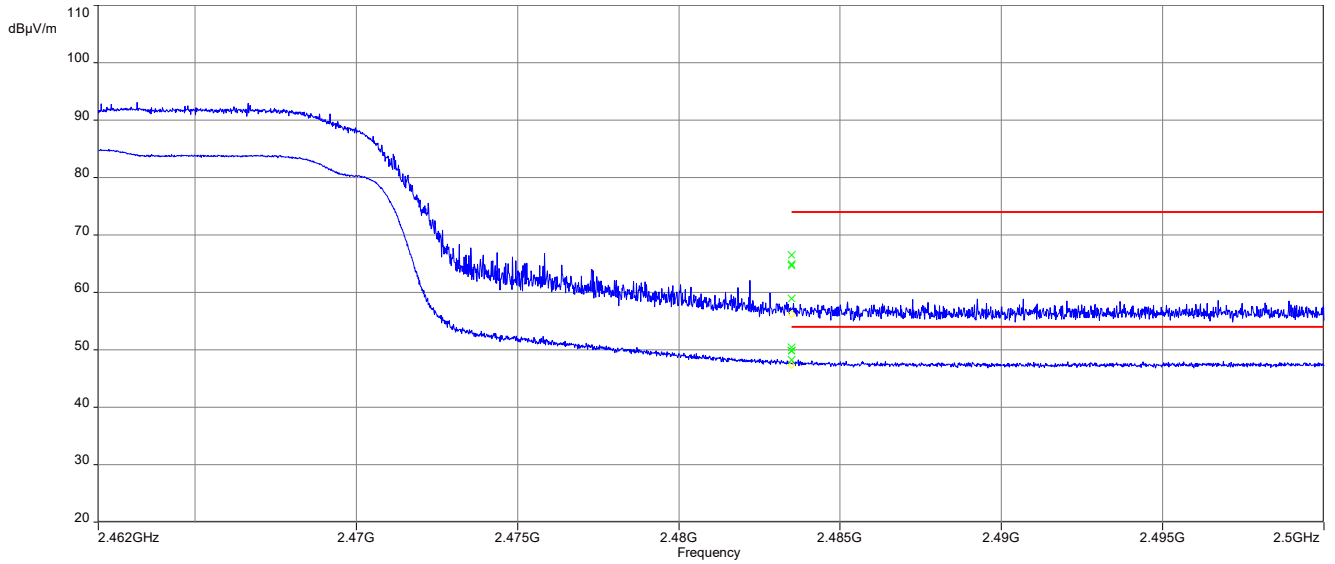

13.2 Spurious emissions radiated above 1 GHz

Measurement:

Measurement parameter	
Detector	Peak / RMS
Sweep time	Auto
Resolution bandwidth	1 MHz
Video bandwidth	3 x RBW
Span	1 GHz to 26 GHz
Trace mode	Max Hold
Measured modulation	☒ DSSS b – mode ☐ OFDM g – mode ☐ OFDM n HT20 – mode ☐ OFDM n HT40 – mode
Test setup	See chapter 8.1 setup B
Measurement uncertainty	See chapter 9

Limits:


FCC		ISED
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency / MHz	Field Strength / (dBµV / m)	Measurement distance / m
Above 960	54.0 (AVG)	3
	74.0 (peak)	

Results: DSSS

TX spurious emissions radiated / dBµV/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m
All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.		
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-

Plots: DSSS

Plot 1: Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

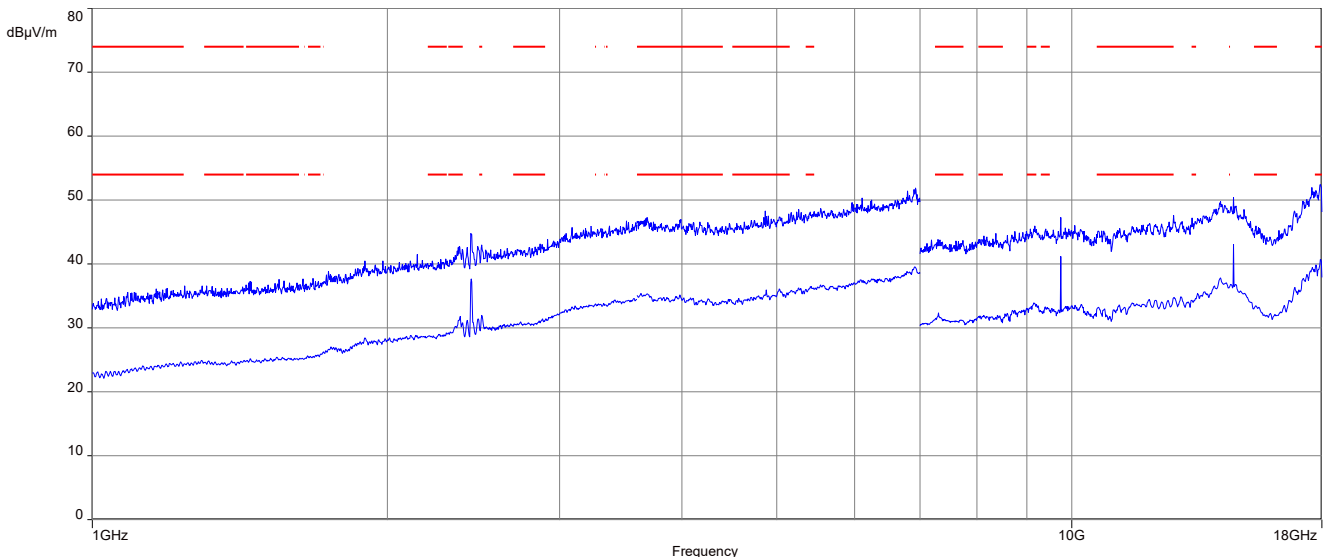

The carrier signal is notched with a 2.4 GHz band rejection filter.

14 Observations

No observations except those reported with the single test cases have been made.

15 Glossary

AVG	Average
C	Compliant
C/N₀	Carrier to noise-density ratio, expressed in dB-Hz
CAC	Channel availability check
CW	Clean wave
DC	Duty cycle
DFS	Dynamic frequency selection
DSSS	Dynamic sequence spread spectrum
DUT	Device under test
EN	European Standard
ETSI	European Telecommunications Standards Institute
EMC	Electromagnetic Compatibility
EUT	Equipment under test
FCC	Federal Communications Commission
FCC ID	Combination of Grantee Code and Equipment Product Code
FHSS	Frequency hopping spread spectrum
FVIN	Firmware version identification number
GNSS	Global Navigation Satellite System
GUE	GNSS User Equipment
HMN	Host marketing name
HVIN	Hardware version identification number
HW	Hardware
ISED	Innovation, Science and Economic Development Canada
Inv. No.	Inventory number
MC	Modulated carrier
NA	Not applicable
NC	Not compliant
NOP	Non occupancy period
NP	Not performed
OBW	Occupied bandwidth
OC	Operating channel
OCW	Operating channel bandwidth
OFDM	Orthogonal frequency division multiplexing
OOB	Out of band
OP	Occupancy period
PER	Packet error rate
PMN	Product marketing name
PP	Positive peak
QP	Quasi peak
RLAN	Radio local area network
S/N or SN	Serial number
SW	Software
UUT	Unit under test
WLAN	Wireless local area network

16 Document history

Version	Applied changes	Date of release
R01	Initial release	2025-12-02

END OF TEST REPORT